



■ Report No.: DDT-R21050705-2E03

■ Issued Date: Jun. 08, 2021

FCC AND IC CERTIFICATION TEST REPORT FOR

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	SOUNDBAR
Model No.	:	BAR 5.1 CNTR
HVIN	:	JBL BAR5.1 CNTR
Trade Mark	:	JBL
FCC ID	:	APIBAR51CNTRM
IC	:	6132A-BAR51CNTRM
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General test information.....	7
2.1.	Description of EUT.....	7
2.2.	Accessories of EUT.....	7
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions.....	8
2.7.	Test laboratory.....	9
2.8.	Measurement uncertainty.....	9
3.	Equipment used during test.....	10
4.	6dB Bandwidth and 99% Bandwidth.....	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits.....	12
4.3.	Test procedure.....	12
4.4.	Test result.....	12
4.5.	Original test data.....	14
5.	Conducted peak Output Power.....	31
5.1.	Block diagram of test setup.....	31
5.2.	Limits.....	31
5.3.	Test Procedure.....	31
5.4.	Test Result.....	31
6.	Power Spectral Density.....	33
6.1.	Block diagram of test setup.....	33
6.2.	Limits.....	33
6.3.	Test Procedure.....	33
6.4.	Test Result.....	33
6.5.	Original Test Data.....	34
7.	Band Edge and Spurious Emissions (Conducted).....	43
7.1.	Block diagram of test setup.....	43
7.2.	Limits.....	43
7.3.	Test Procedure.....	43
7.4.	Test Result.....	44
7.5.	Original test data.....	44
8.	Radiated Spurious Emissions.....	74
8.1.	Block diagram of test setup.....	74

8.2.	Limit	75
8.3.	Test Procedure	76
8.4.	Test result	78
9.	Radiated Band Edge Compliance	83
9.1.	Block diagram of test setup	83
9.2.	Limit	83
9.3.	Test Procedure	83
9.4.	Test result	83
10.	Power Line Conducted Emission	108
10.1.	Block diagram of test setup	108
10.2.	Power Line Conducted Emission Limits (Class B)	108
10.3.	Test Procedure	108
10.4.	Test Result	109
11.	Antenna Requirements	112
11.1.	Limit	112
11.2.	Result	112

TEST REPORT DECLARE

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	SOUNDBAR
Model No	:	BAR 5.1 CNTR
HVIN	:	JBL BAR5.1 CNTR
Trade Mark	:	JBL
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2
February 2017.

Test procedure used: ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, 558074 D01 15.247
Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:	DDT-R21050705-2E03		
Date of Receipt:	May 15, 2021	Date of Test:	May 15, 2021 ~ Jun. 08, 2021

Prepared By:

Sam Li

Sam Li/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jun. 08, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6Db Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a)	PASS
Conducted Output Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 €	PASS
Power Spectral Density	FCC 15.247 € RSS-247 Clause 5.2 (b)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) RSS-247 Clause 5.5	PASS
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	PASS
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	PASS
Power Line Conducted Emission	FCC 15.207 RSS-GEN Clause 8.8	PASS
Antenna requirement	FCC 15.203 RSS-GEN Clause 8.3	PASS

2. General test information

2.1. Description of EUT

EUT* Name	: SOUNDBAR
Model Number	: BAR 5.1 CNTR
HVIN	: JBL BAR5.1 CNTR
EUT function description	: Please reference user manual of this device
Power supply	: 100-240V~, 50/60Hz, 175W
Radio Technology	: IEEE 802.11b/g/n
FCC Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: 6.5, 13, 19.5, 26, 39, 52, 58.5, 65 Mbps IEEE 802.11n HT40: 13.5, 27, 40.5, 54, 81, 108, 121.5, 135 Mbps
Antenna Type	: Antenna 1: External FPC antenna, maximum PK gain: 2.97 dBi Antenna 2: External FPC antenna, maximum PK gain: 2.36 dBi
Sample Type	: Series production
Serial number	: TL0990-DL0141795 for conductive test TL0990-DL0141797 for radiation test

Note: EUT is the ab. of equipment under test.

Antenna information			
	Ant1 gain	Ant2 gain	MIMO
IEEE 802.11b	2.97	2.36	/
IEEE 802.11g	2.97	2.36	/
IEEE 802.11n HT20	2.97	2.36	5.69
IEEE 802.11n HT40	2.97	2.36	5.69

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
AC cable	Harman	N/A	N/A	Length: 1.5m, unshielded

HDMI cable	Harman	N/A	N/A	Length: 1.2m, shielded, two core
------------	--------	-----	-----	-------------------------------------

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	DELL	Latitude D610	FCC DOC	00045-534-136-300

2.4. Block diagram of EUT configuration for test



EUT was connected to control to provide by manufacturer which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run a special test software “adb.EXE” provided by manufacturer to control EUT work in Continuous Tx mode (>98% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	13	1	LCH: CH1	2412
	13	1	MCH: CH6	2437
	13	1	HCH: CH11	2462
IEEE 802.11g	13	6	LCH: CH1	2412
	13	6	MCH: CH6	2437
	13	6	HCH: CH11	2462
IEEE 802.11n HT20	12	MCS 8	LCH: CH1	2412
	12	MCS 8	MCH: CH6	2437
	12	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	11	MCS 8	LCH: CH3	2422
	11	MCS 8	MCH: CH6	2437
	11	MCS 8	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method)
	5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3 × 10 ⁻⁸
Temperature	0.4°C
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz)
	4.40 dB (6 GHz-18 GHz)
	3.54 dB (18 GHz-26 GHz)
	4.30 dB (26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input type="checkbox"/> RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	101272	Jul. 01, 2020	1 Year
Spectrum analyzer	Agilent	N9020D	MY49100362	Sep. 28, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jul. 01, 2020	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jul. 01, 2020	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Jul. 01, 2020	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Jul. 01, 2020	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 28, 2020	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jul. 01, 2020	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
<input checked="" type="checkbox"/> RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 25, 2020	1 Year
Spectrum analyzer	Agilent	N9020D	MY49100362	Sep. 28, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jul. 01, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jul. 01, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jul. 01, 2020	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jul. 01, 2020	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 28, 2020	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jul. 01, 2020	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
<input type="checkbox"/> Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jul. 01, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 13, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 30, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Sep. 30, 2020	1 Year

Test software	Audix	E3	V 6.11111b	N/A	N/A
☑Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jul. 01, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 11, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	1013 03	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 24, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101170	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	KH43101	43101180156 8-12#	Jul. 01, 2020	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

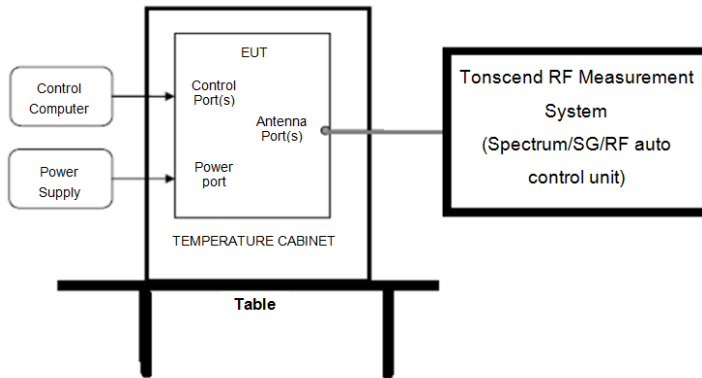

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW: 300 kHz
 VBW: 1 MHz
 Detector Mode: Peak
 Sweep time: auto
 Trace mode Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW: 100 kHz
 VBW: 300 kHz
 Detector Mode: Peak
 Sweep time: auto
 Trace mode Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test result


Test Mode	Test	Ant	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
-----------	------	-----	---------------------	-------------	---------


11B	2412	Ant1	9.160	0.5	PASS
11B	2412	Ant2	9.160	0.5	PASS
11B	2437	Ant1	9.120	0.5	PASS
11B	2437	Ant2	9.160	0.5	PASS
11B	2462	Ant1	8.160	0.5	PASS
11B	2462	Ant2	9.120	0.5	PASS
11G	2412	Ant1	15.200	0.5	PASS
11G	2412	Ant2	14.520	0.5	PASS
11G	2437	Ant1	15.120	0.5	PASS
11G	2437	Ant2	15.160	0.5	PASS
11G	2462	Ant1	15.160	0.5	PASS
11G	2462	Ant2	15.160	0.5	PASS
11N20MIMO	2412	Ant1	15.200	0.5	PASS
11N20MIMO	2412	Ant2	15.160	0.5	PASS
11N20MIMO	2437	Ant1	15.200	0.5	PASS
11N20MIMO	2437	Ant2	15.200	0.5	PASS
11N20MIMO	2462	Ant1	15.200	0.5	PASS
11N20MIMO	2462	Ant2	15.200	0.5	PASS
11N40MIMO	2422	Ant1	35.280	0.5	PASS
11N40MIMO	2422	Ant2	35.280	0.5	PASS
11N40MIMO	2437	Ant1	35.360	0.5	PASS
11N40MIMO	2437	Ant2	35.360	0.5	PASS
11N40MIMO	2452	Ant1	35.360	0.5	PASS
11N40MIMO	2452	Ant2	35.280	0.5	PASS

Test Mode	Test	Ant	99% OBW [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	13.52	---	PASS
11B	2412	Ant2	13.76	---	PASS
11B	2437	Ant1	13.52	---	PASS
11B	2437	Ant2	13.92	---	PASS
11B	2462	Ant1	13.48	---	PASS
11B	2462	Ant2	14.00	---	PASS
11G	2412	Ant1	16.80	---	PASS
11G	2412	Ant2	16.84	---	PASS
11G	2437	Ant1	16.84	---	PASS
11G	2437	Ant2	16.80	---	PASS
11G	2462	Ant1	16.84	---	PASS
11G	2462	Ant2	16.80	---	PASS
11N20MIMO	2412	Ant1	17.68	---	PASS


11N20MIMO	2412	Ant2	17.68	---	PASS
11N20MIMO	2437	Ant1	17.72	---	PASS
11N20MIMO	2437	Ant2	17.64	---	PASS
11N20MIMO	2462	Ant1	17.72	---	PASS
11N20MIMO	2462	Ant2	17.64	---	PASS
11N40MIMO	2422	Ant1	36.48	---	PASS
11N40MIMO	2422	Ant2	36.48	---	PASS
11N40MIMO	2437	Ant1	36.48	---	PASS
11N40MIMO	2437	Ant2	36.56	---	PASS
11N40MIMO	2452	Ant1	36.48	---	PASS
11N40MIMO	2452	Ant2	36.56	---	PASS

4.5. Original test data

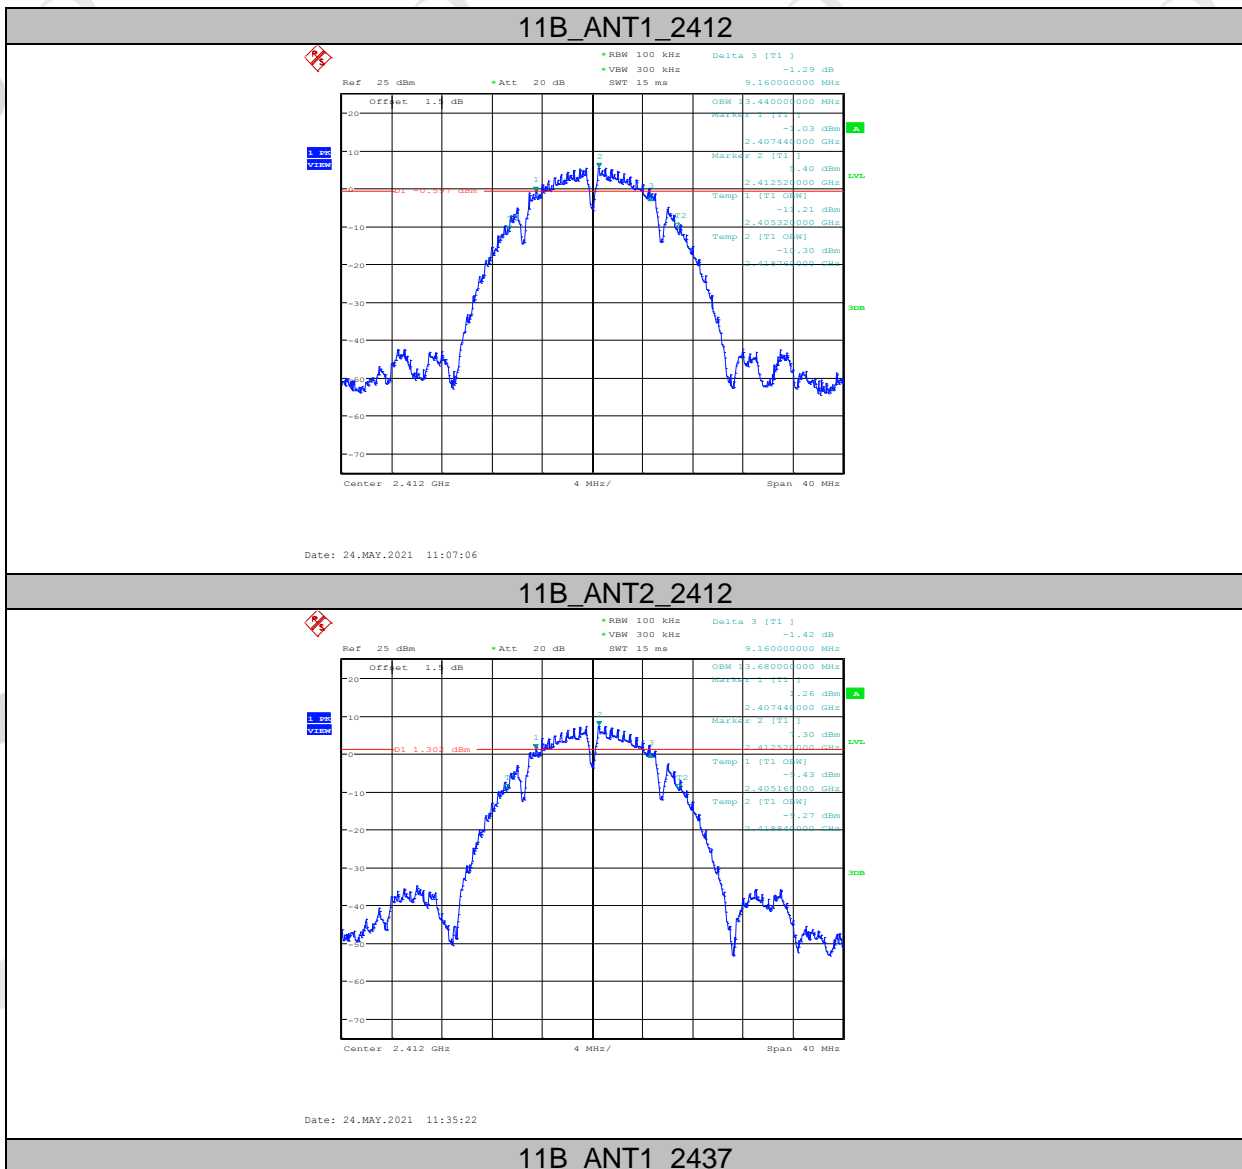


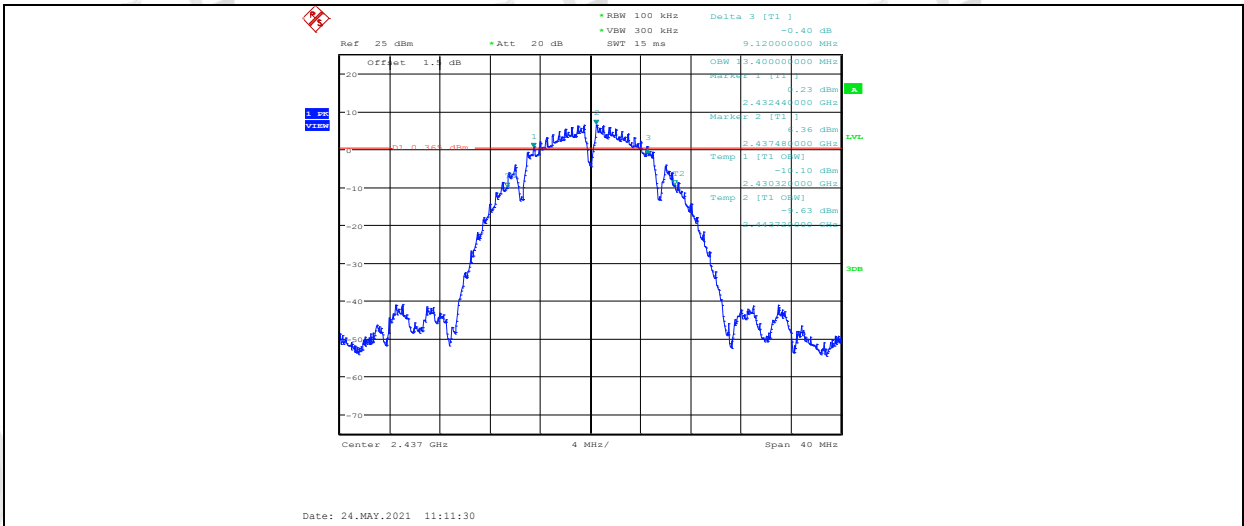


11B_ANT2_2437

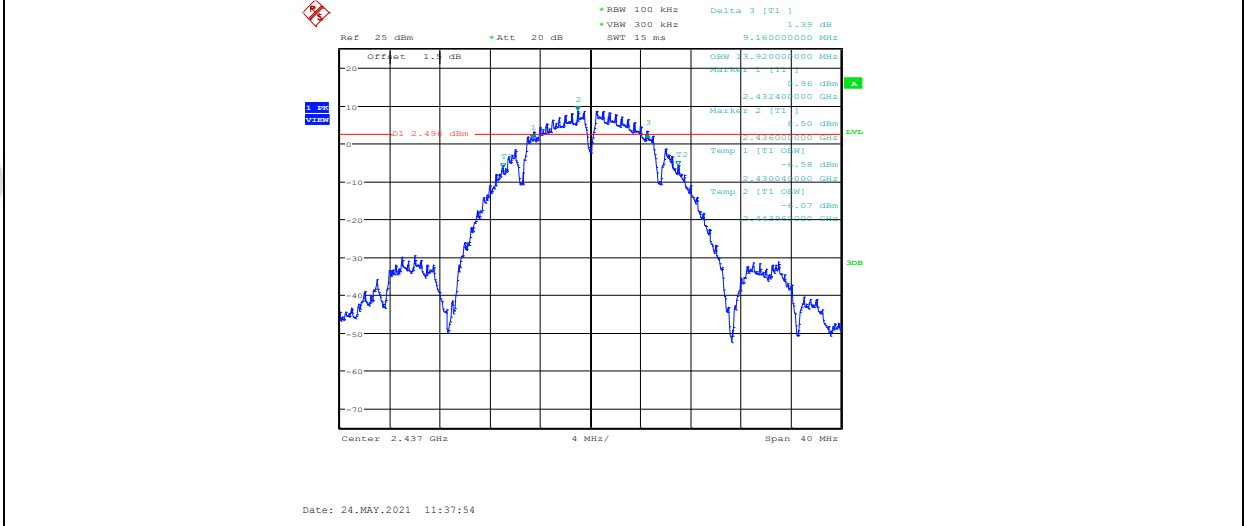


11B_ANT1_2462

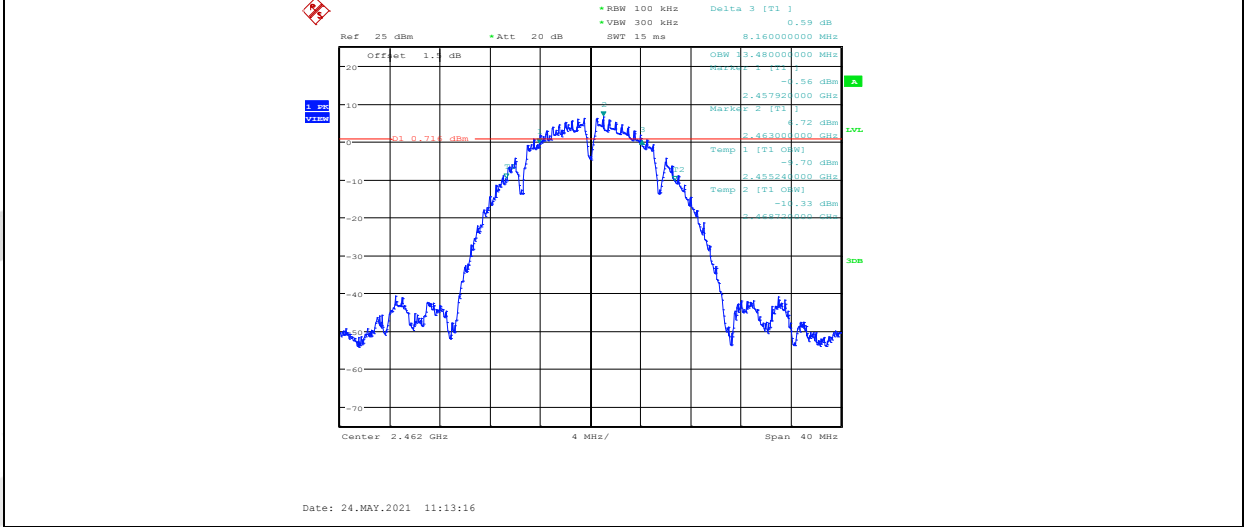


11B_ANT2_2462

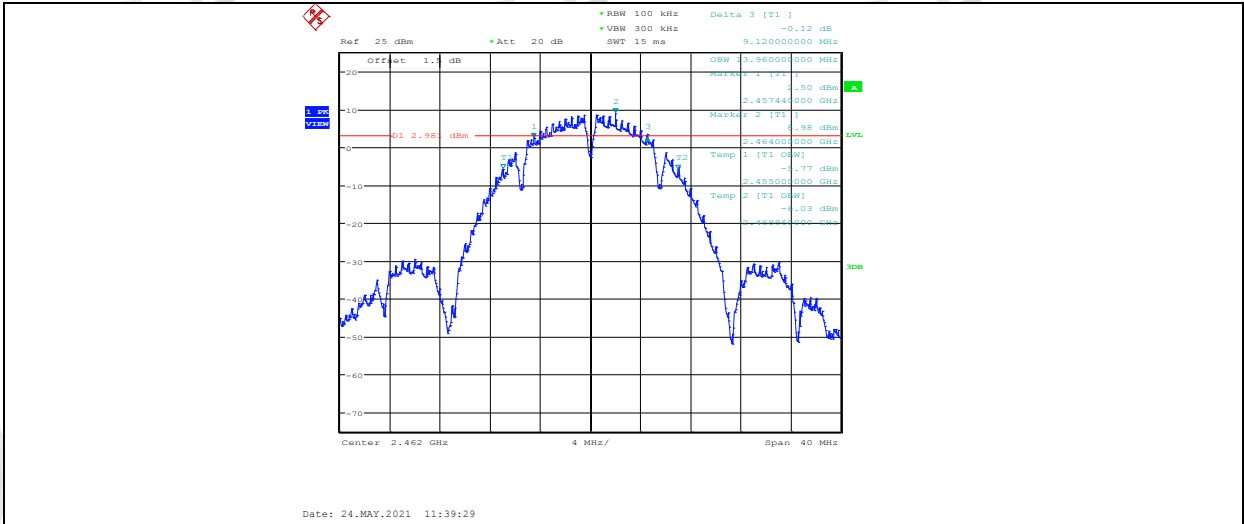


11G_ANT1_2412

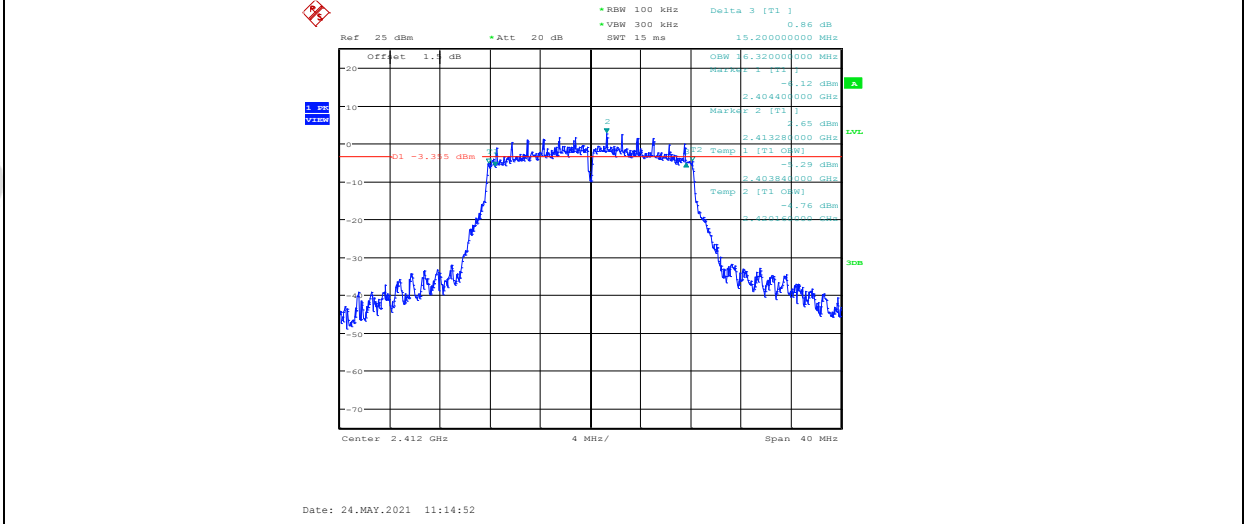


11G_ANT2_2412

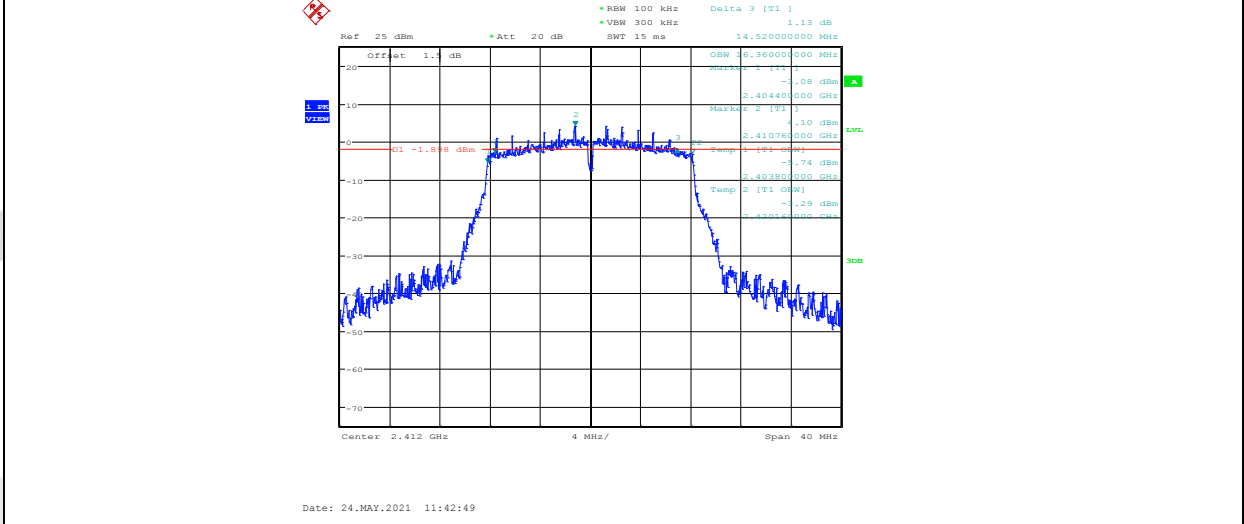


11G_ANT1_2437

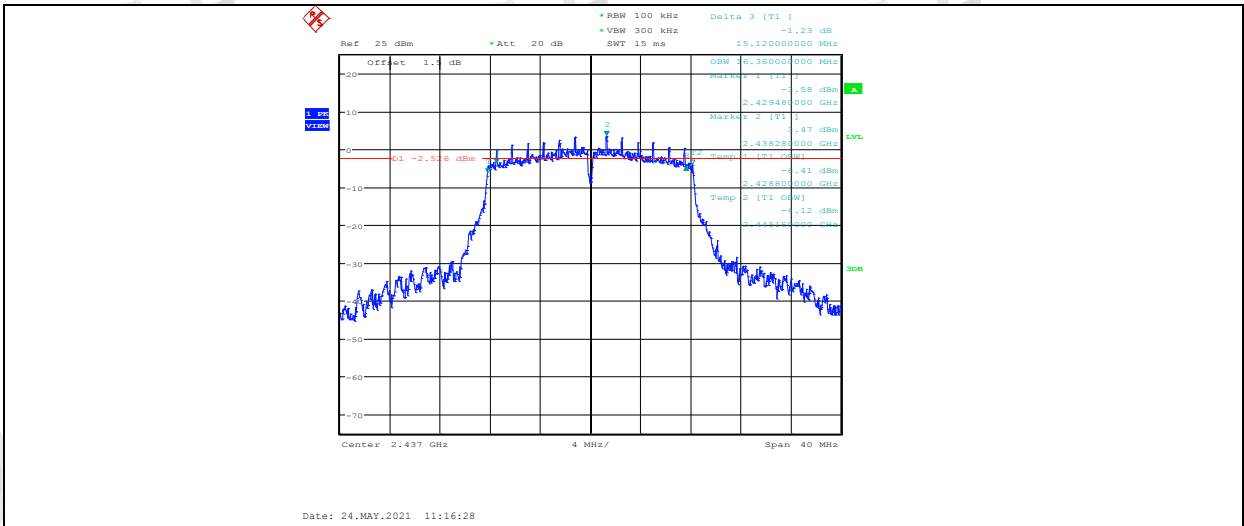


11G_ANT2_2437

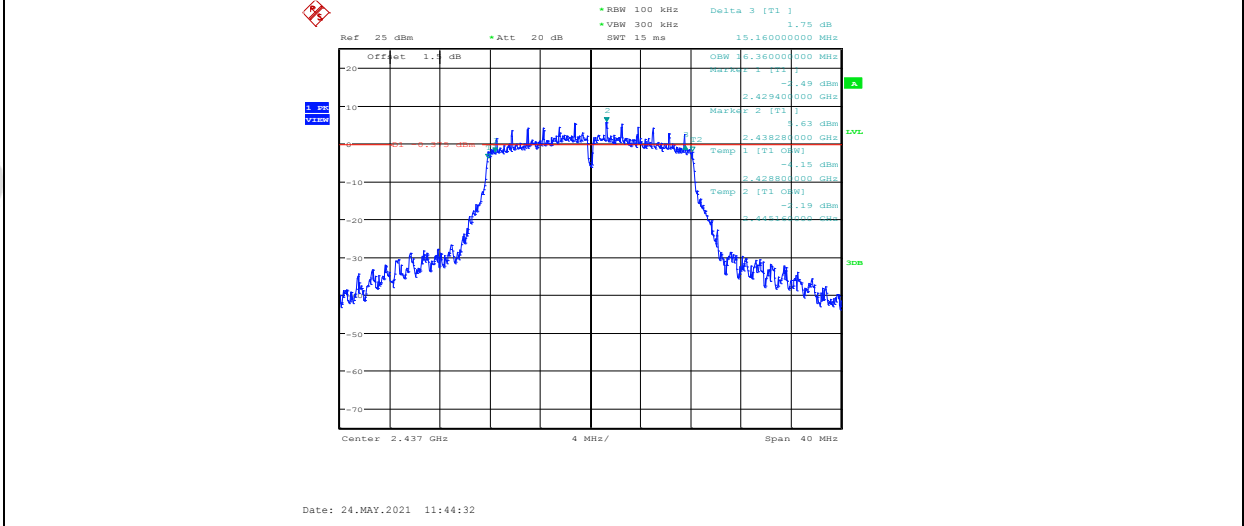


11G_ANT1_2462

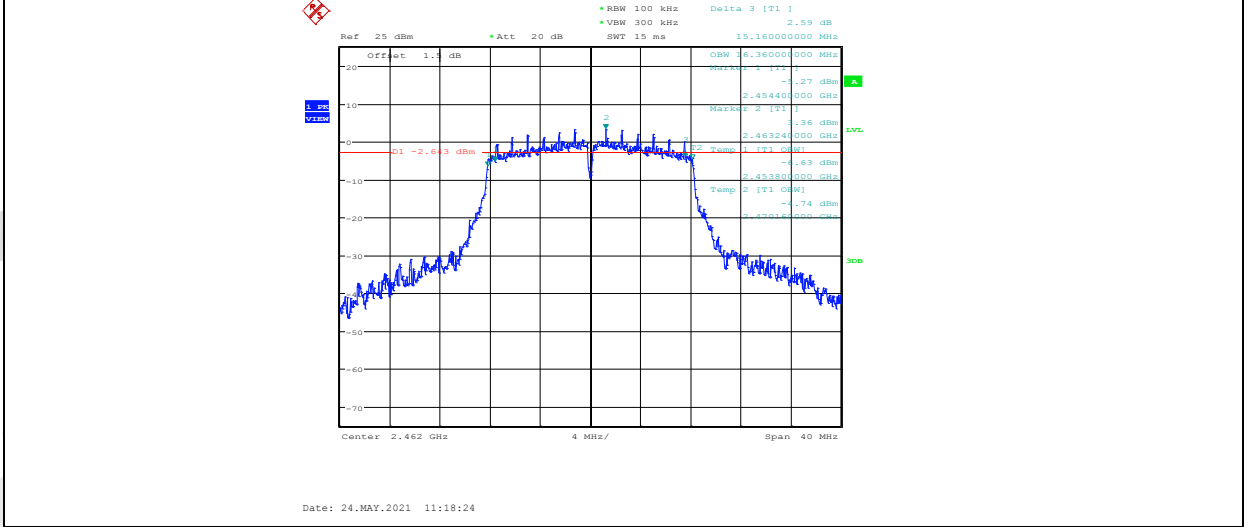


11G_ANT2_2462

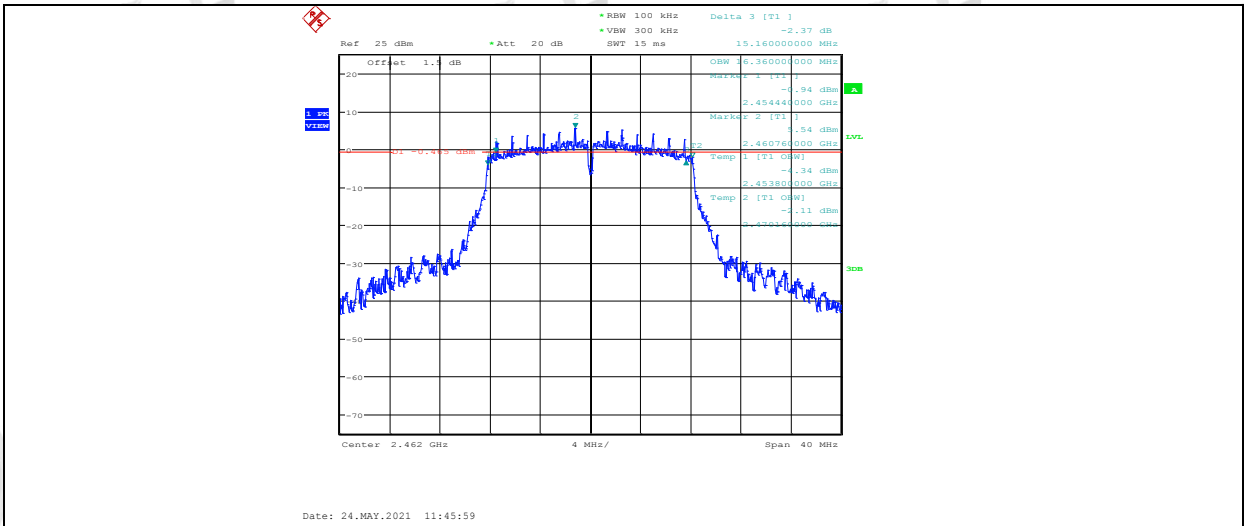


11N20MIMO_ANT1_2412

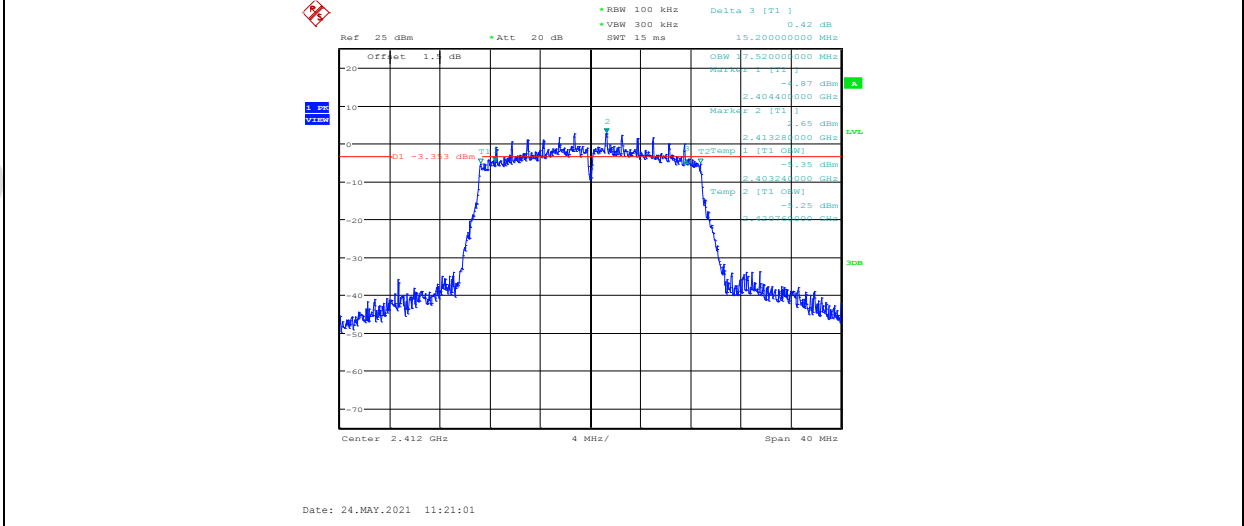


11N20MIMO_ANT2_2412

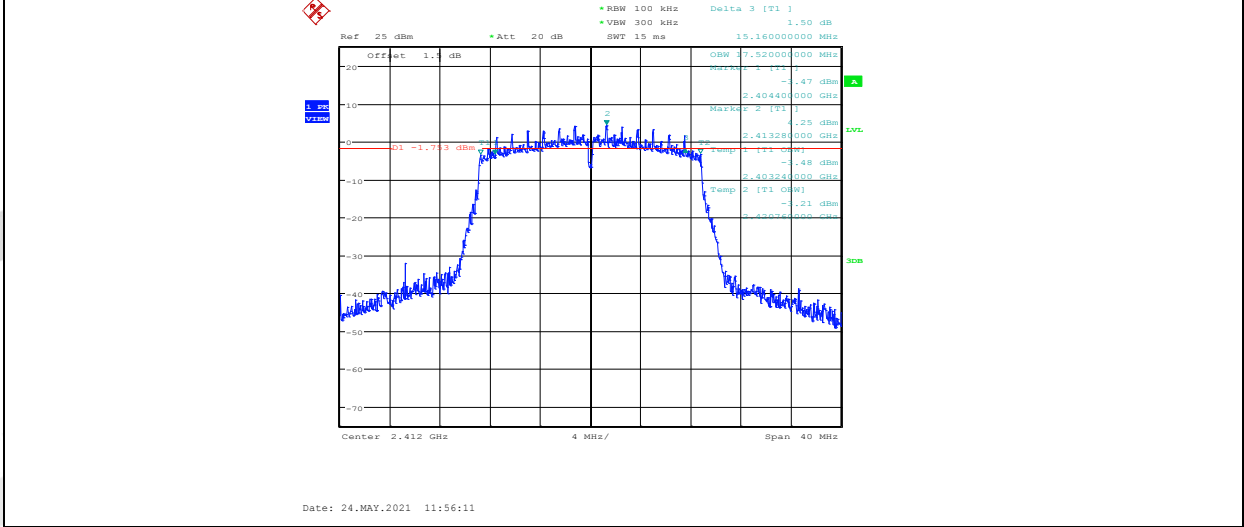


11N20MIMO_ANT1_2437

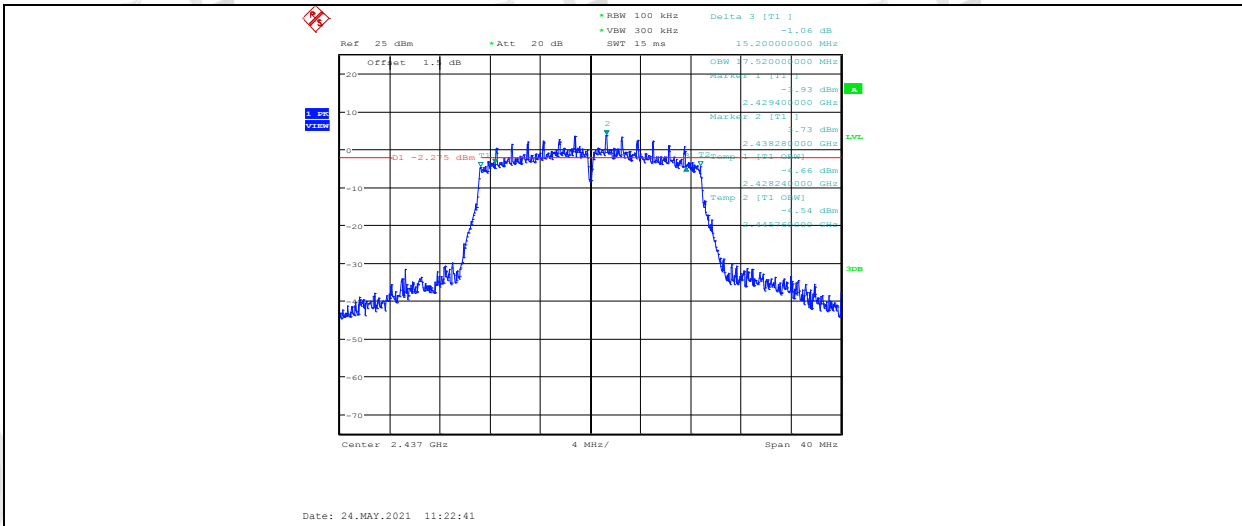


11N20MIMO_ANT2_2437

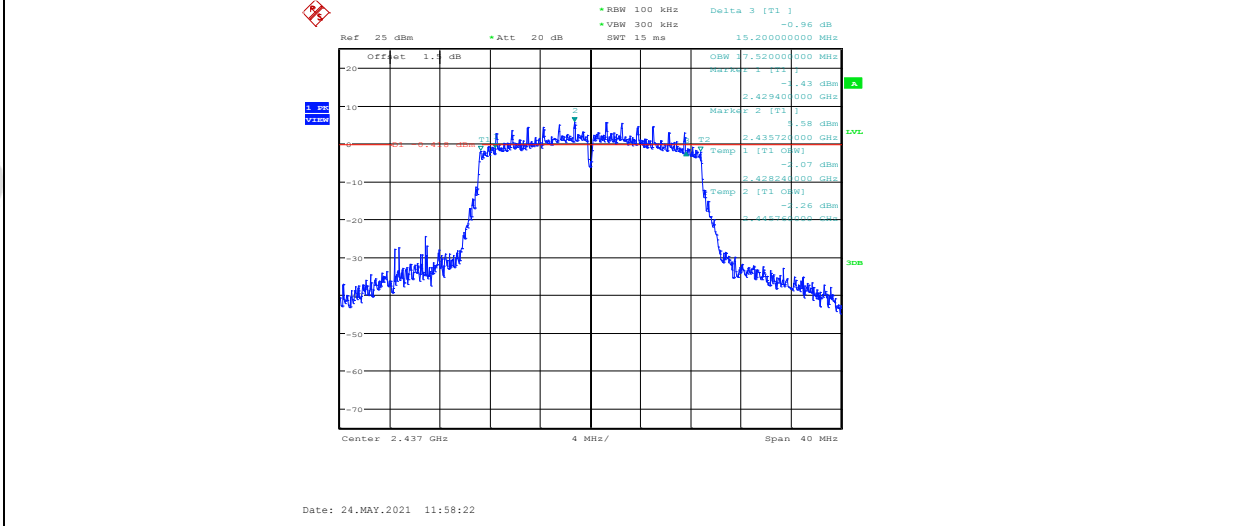


11N20MIMO_ANT1_2462

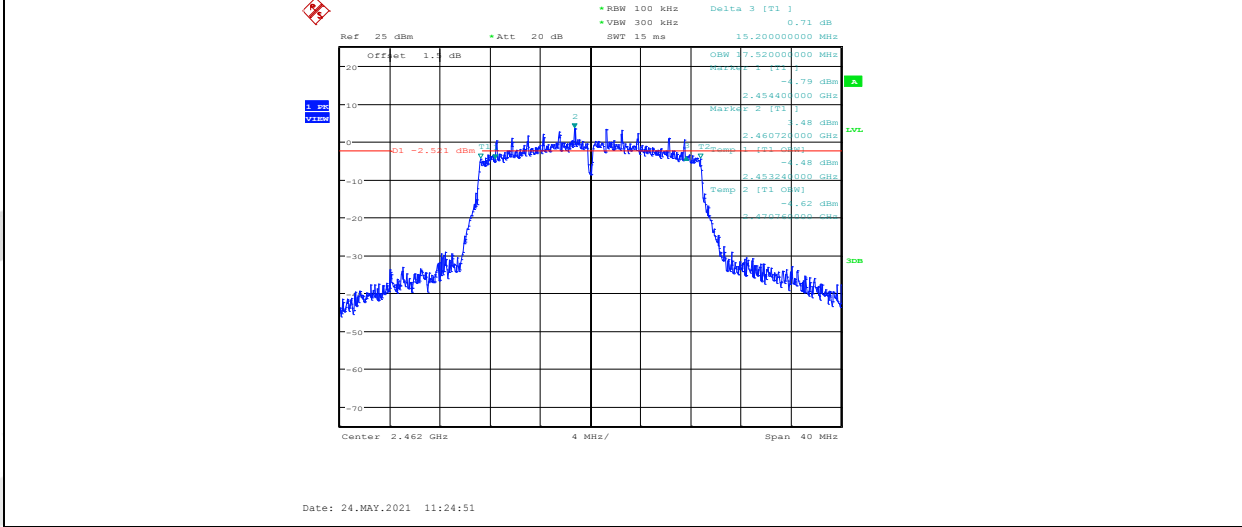


11N20MIMO_ANT2_2462

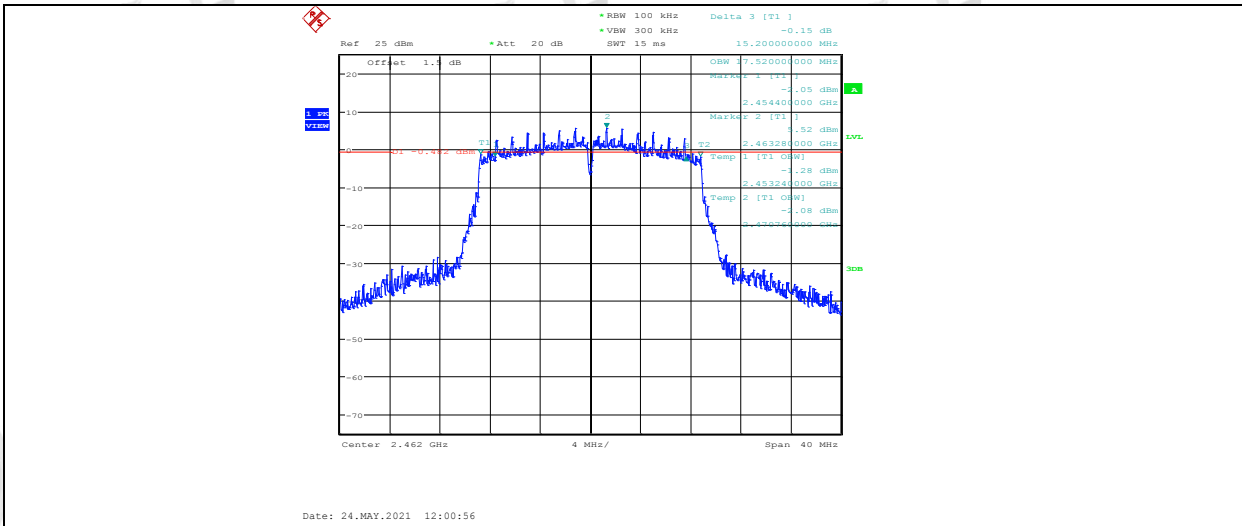


11N40MIMO_ANT1_2422

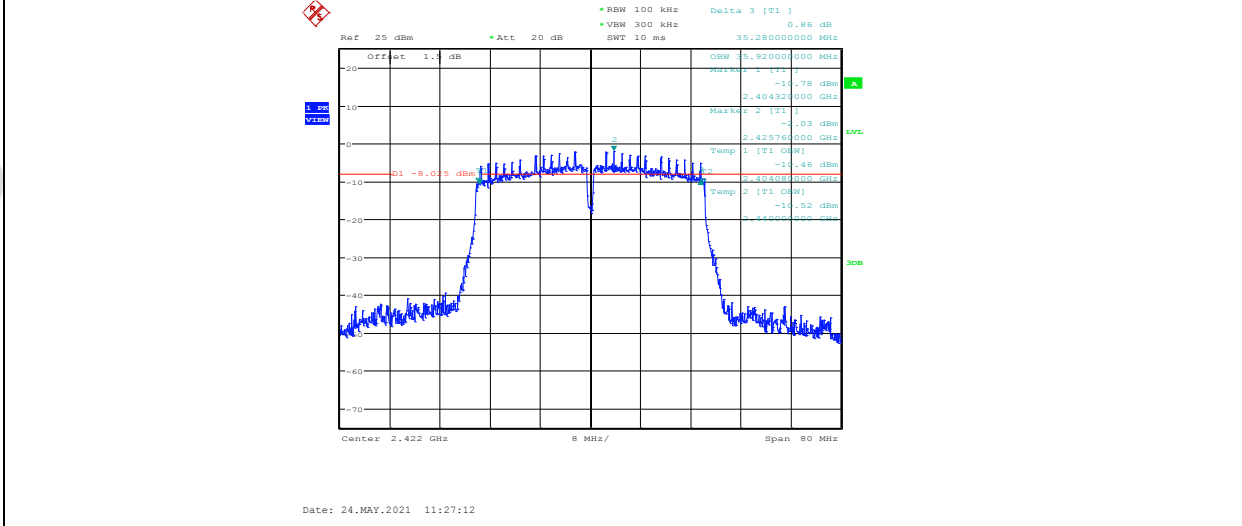


11N40MIMO_ANT2_2422

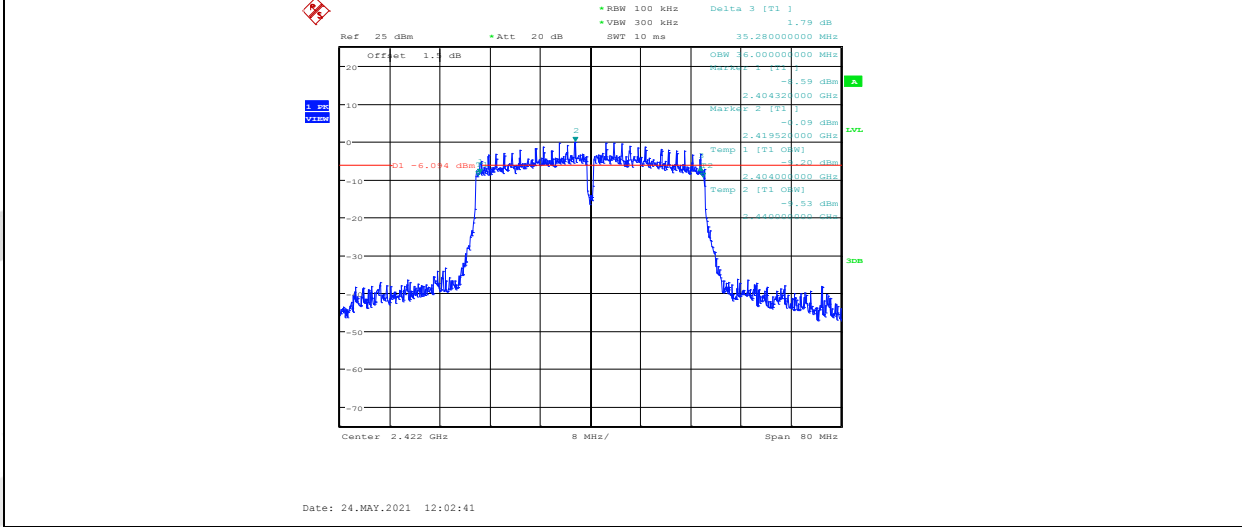


11N40MIMO_ANT1_2437

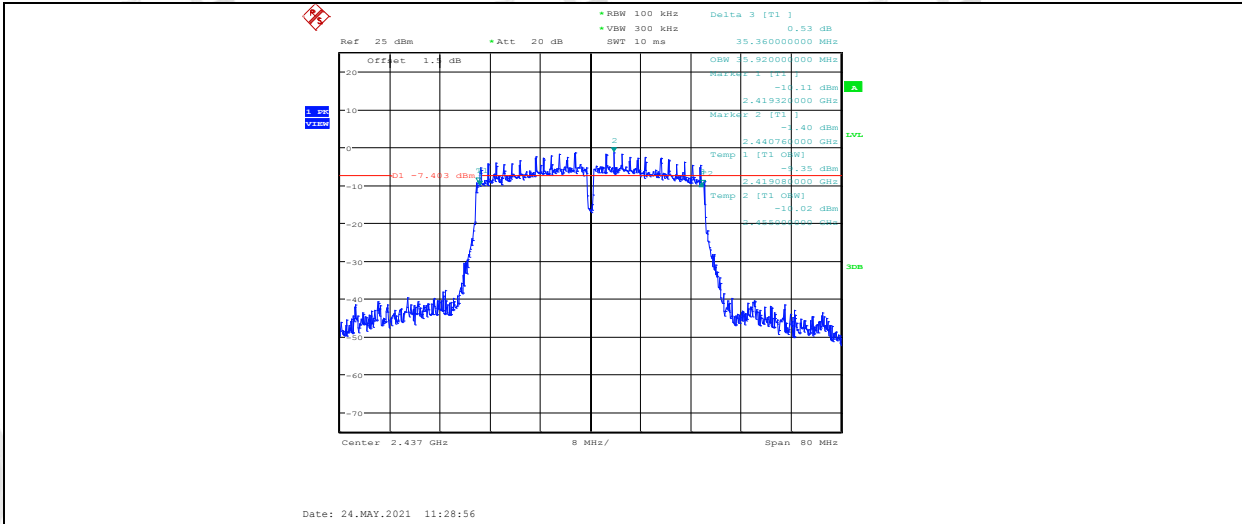




11N40MIMO_ANT2_2437

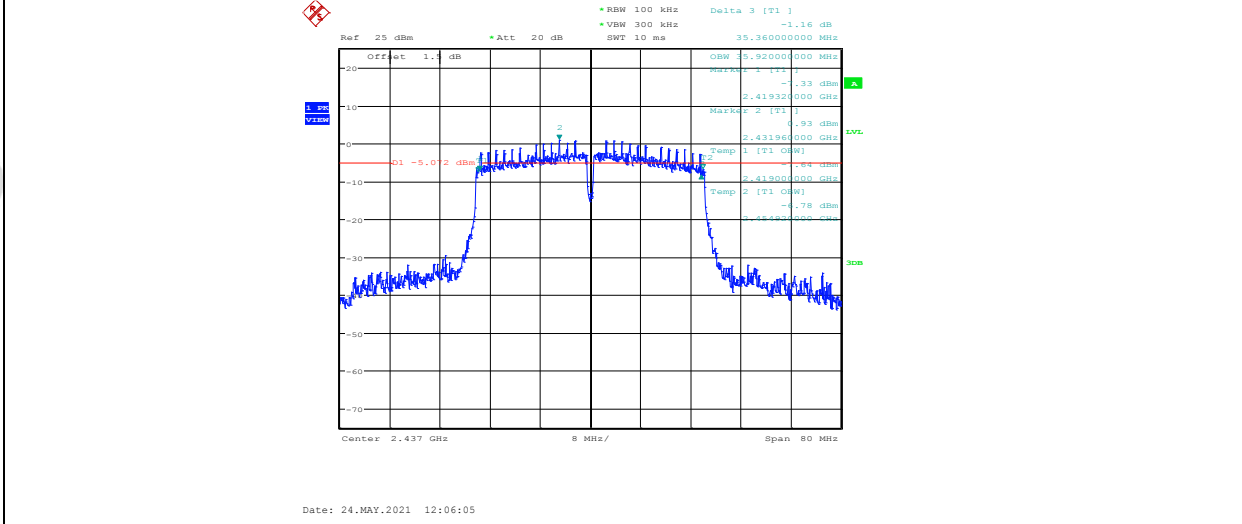


11N40MIMO_ANT1_2452

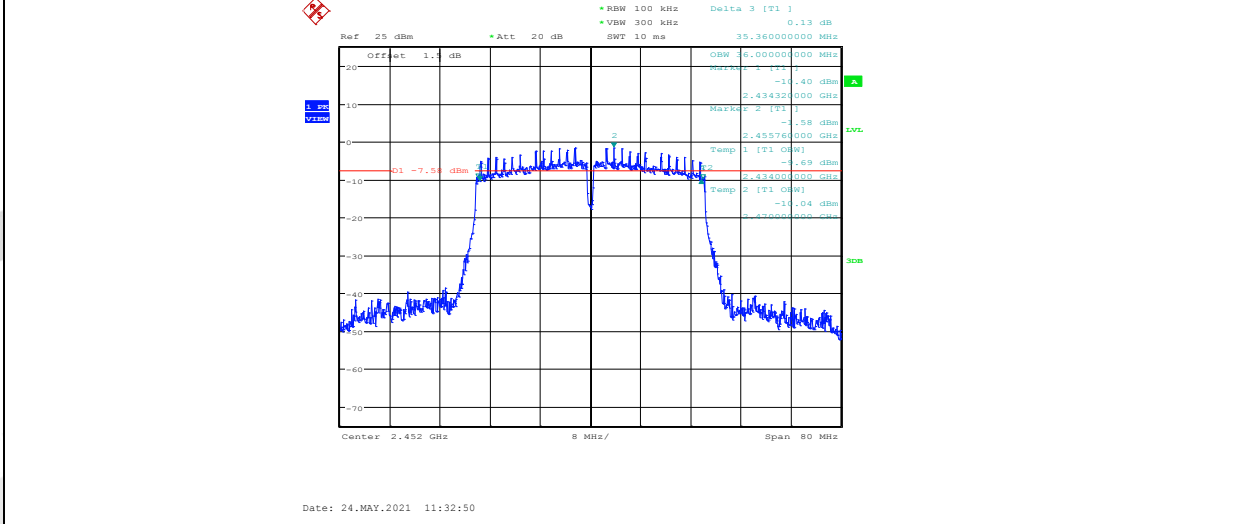


11N40MIMO_ANT2_2452

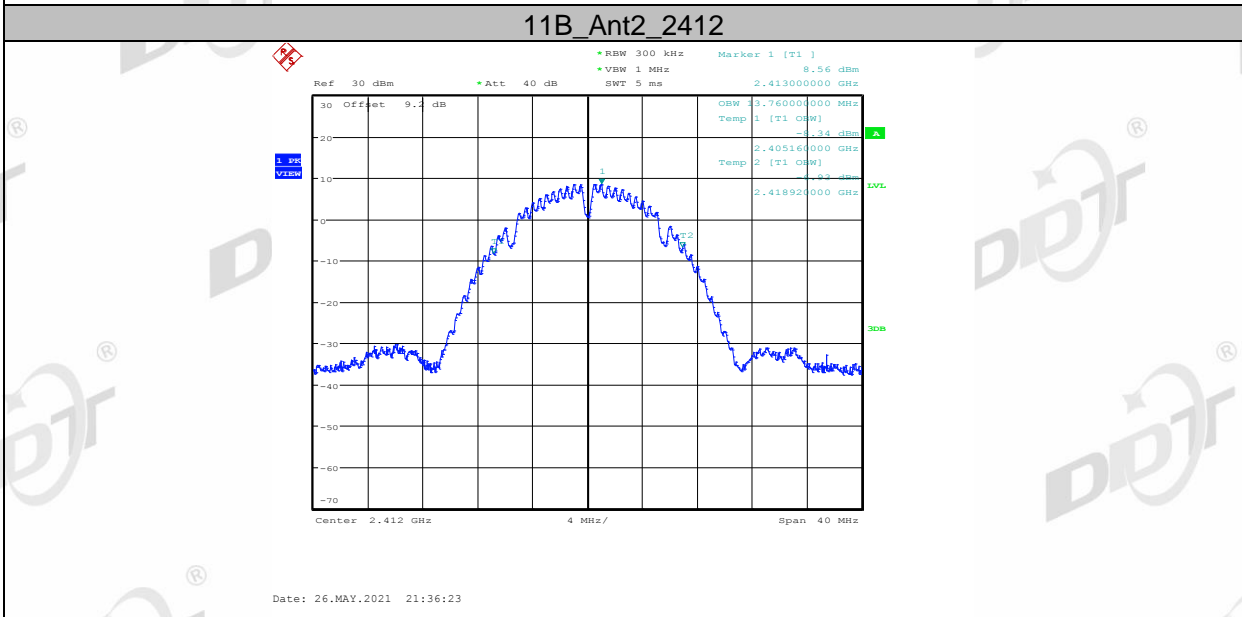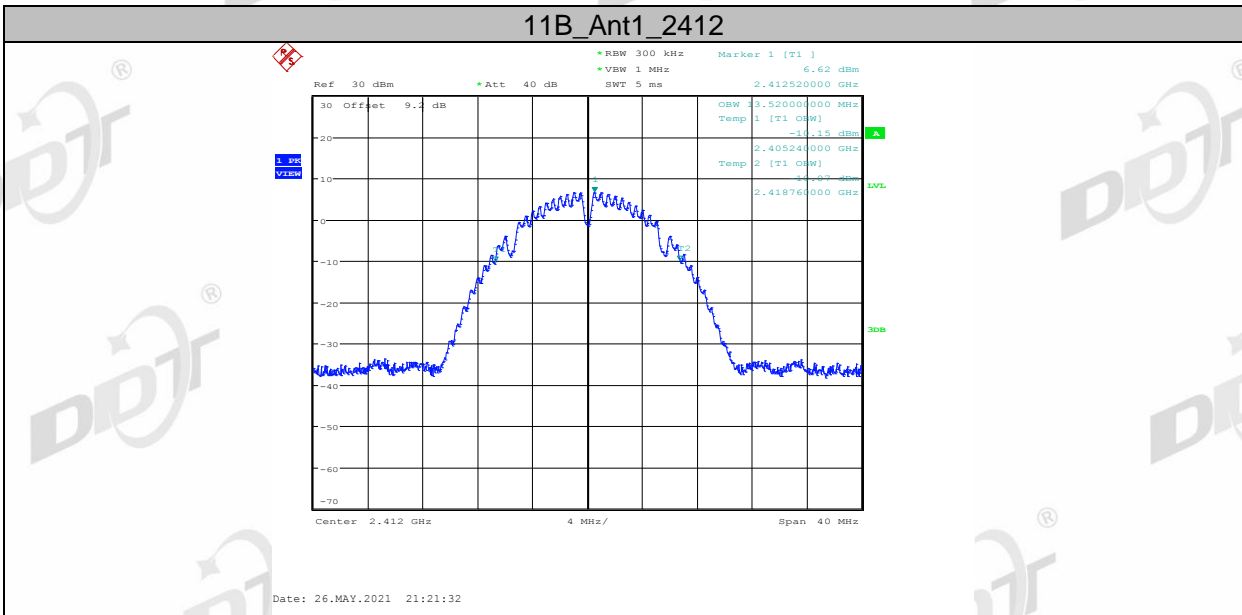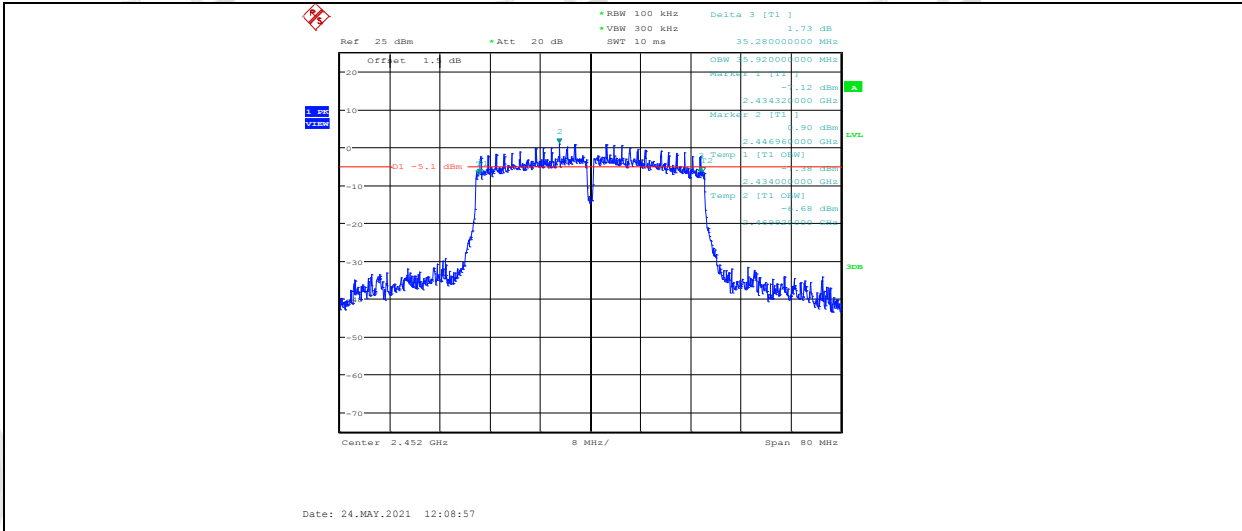


11B_Ant1_2437

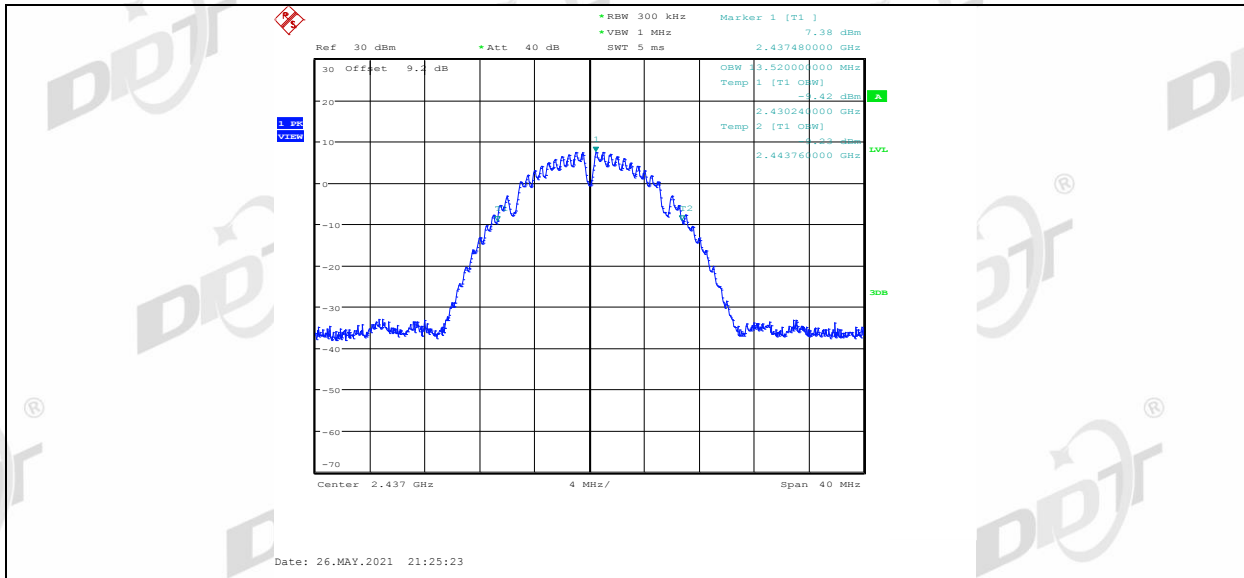


11B_Ant2_2437

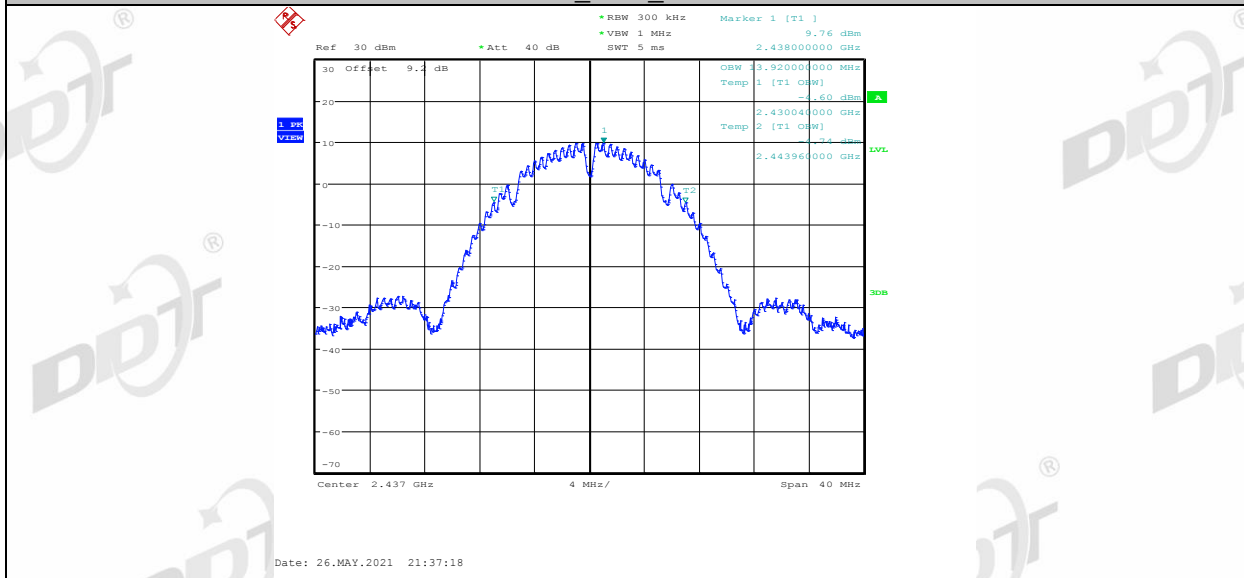


11B_Ant1_2462

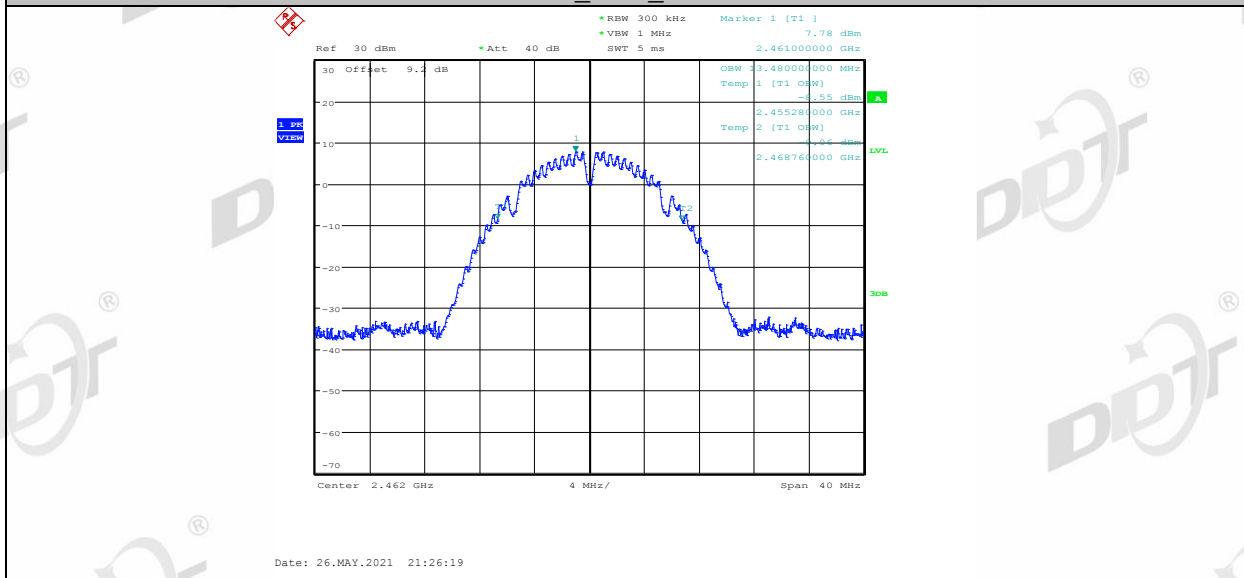


11B_Ant2_2462

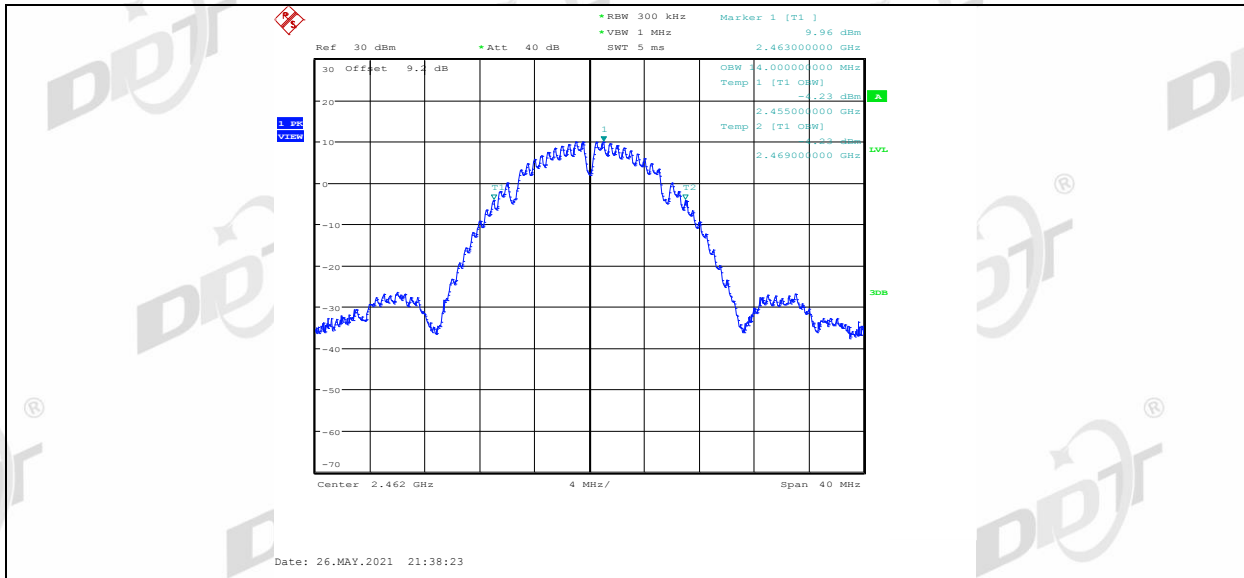


11G_Ant1_2412

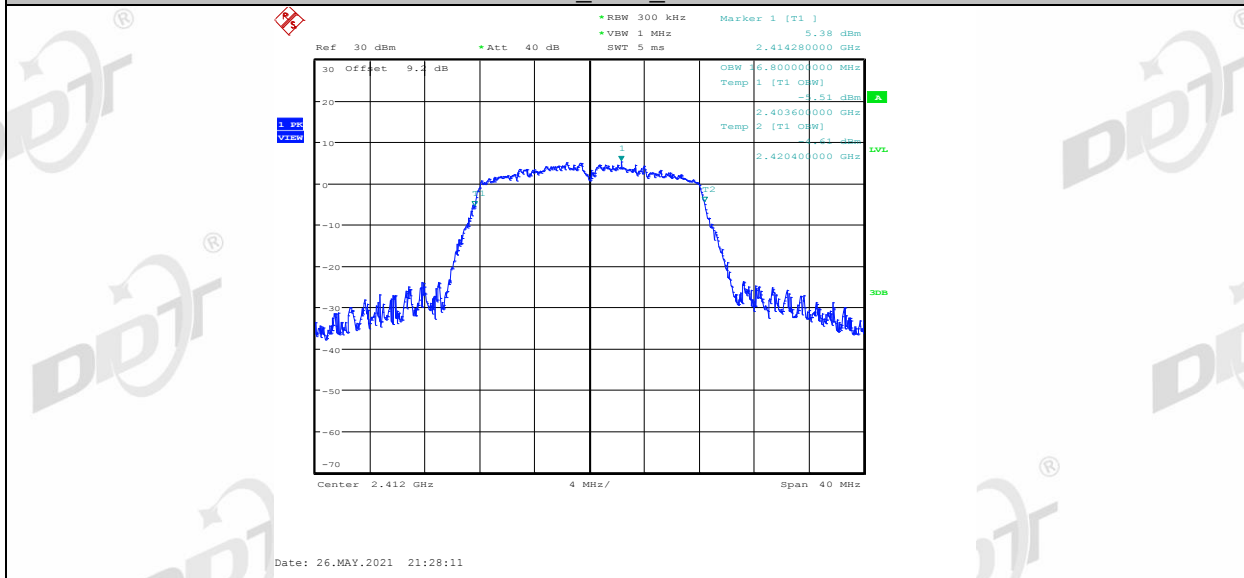


11G_Ant2_2412

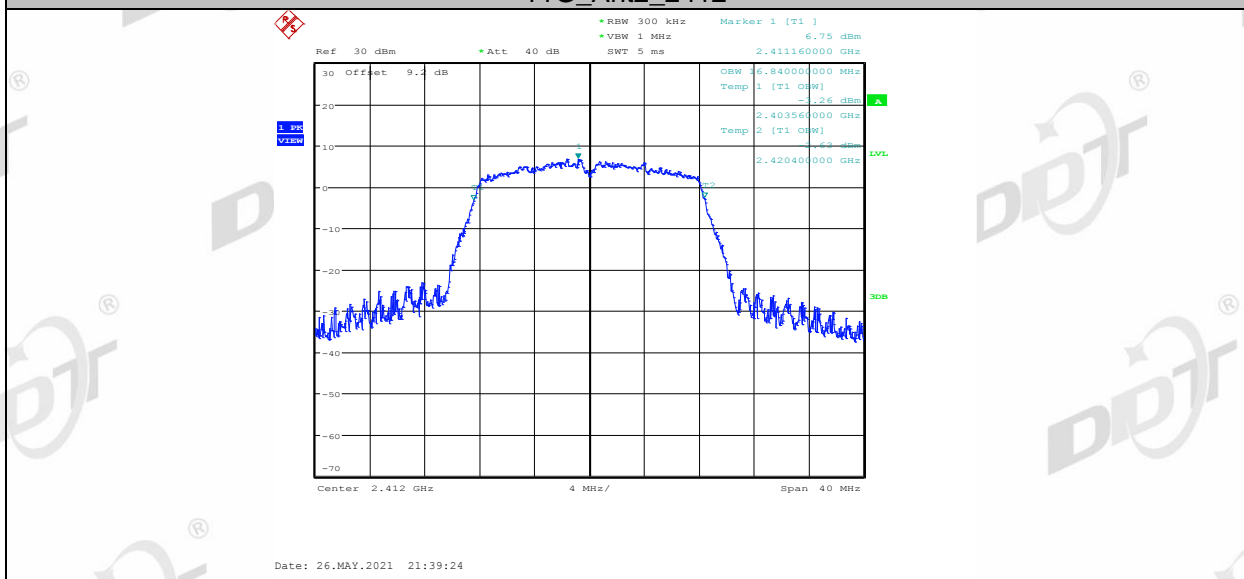


11G_Ant1_2437

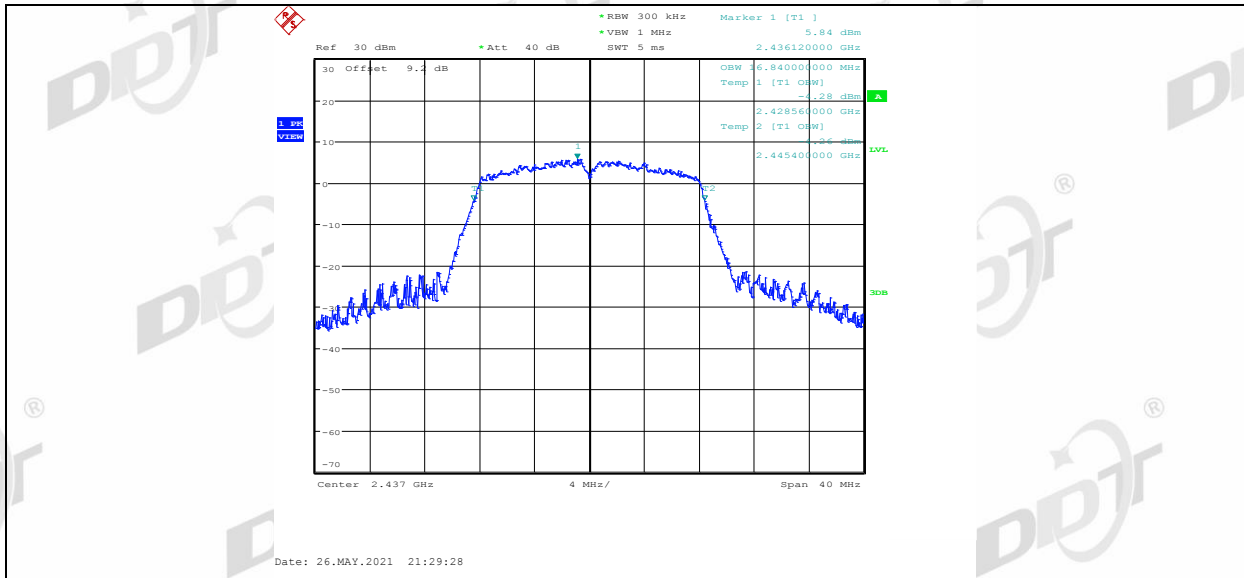


11G_Ant2_2437

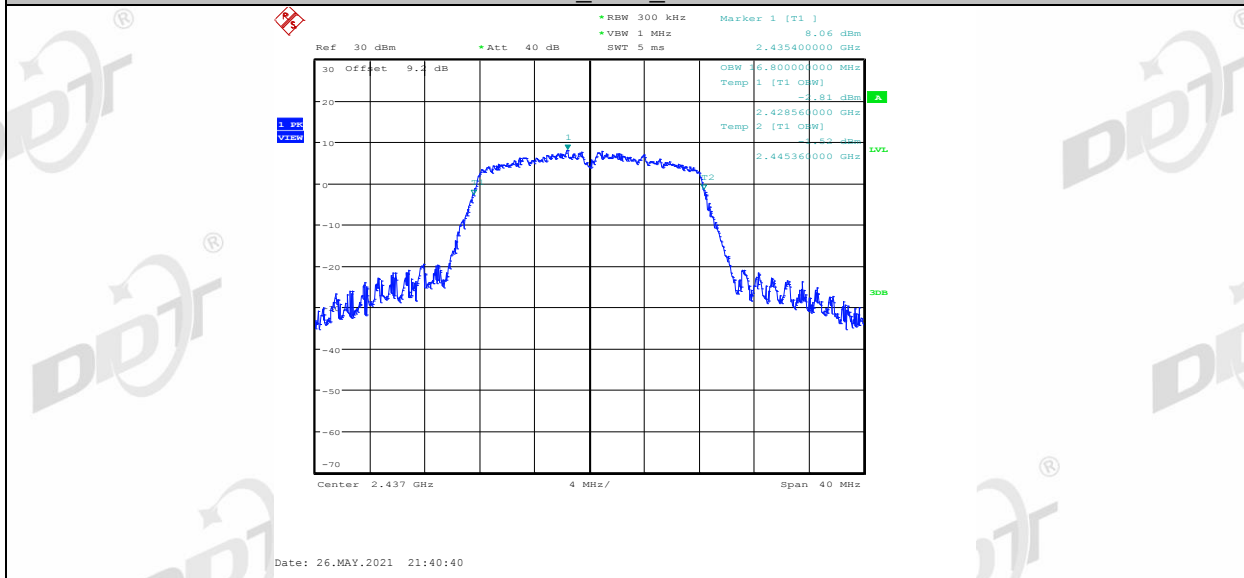


11G_Ant1_2462

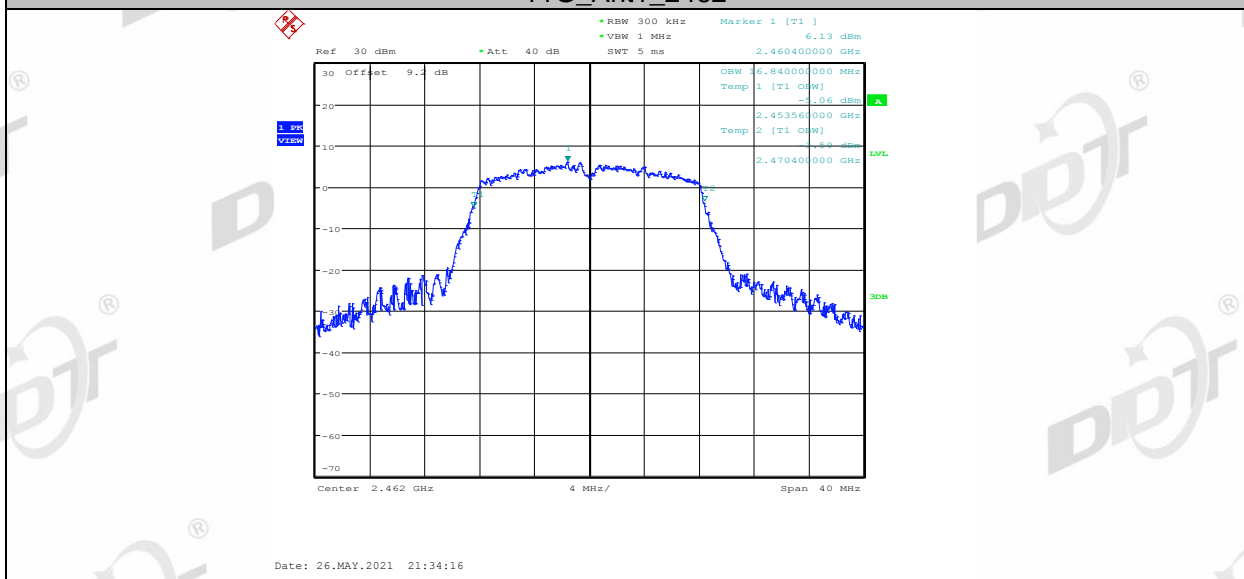


11G_Ant2_2462

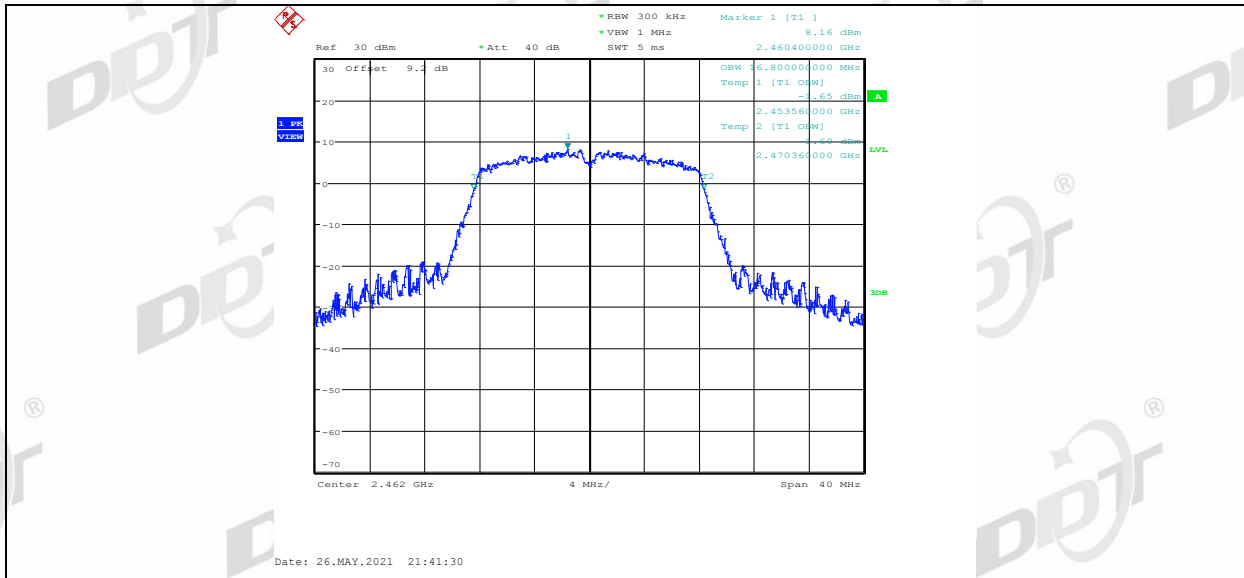


11N20MIMO_Ant1_2412

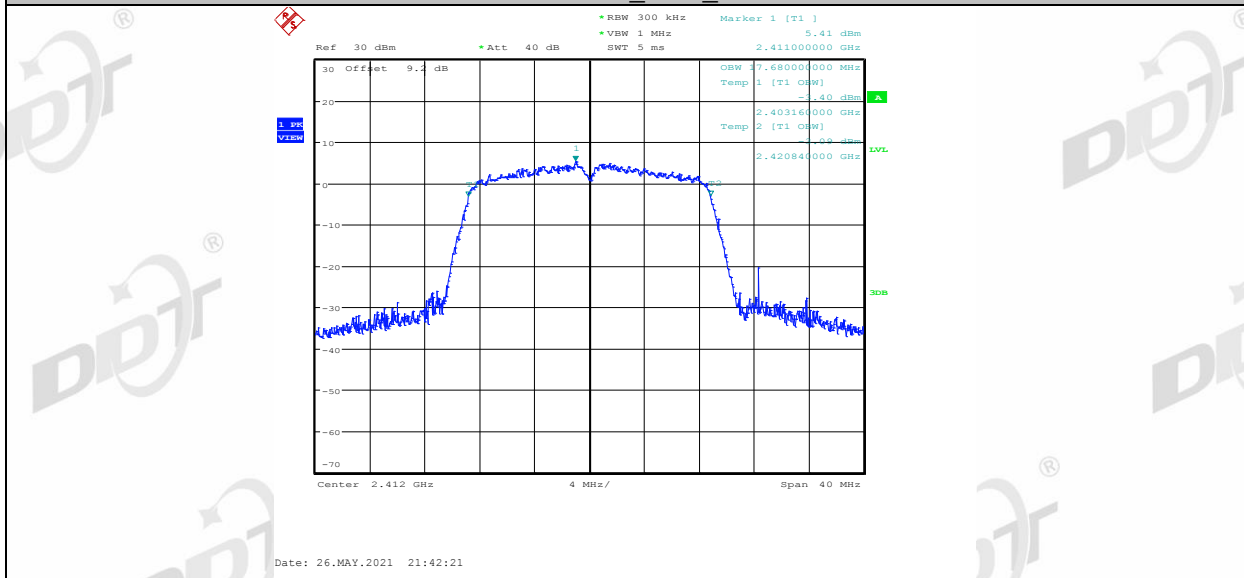


11N20MIMO_Ant2_2412

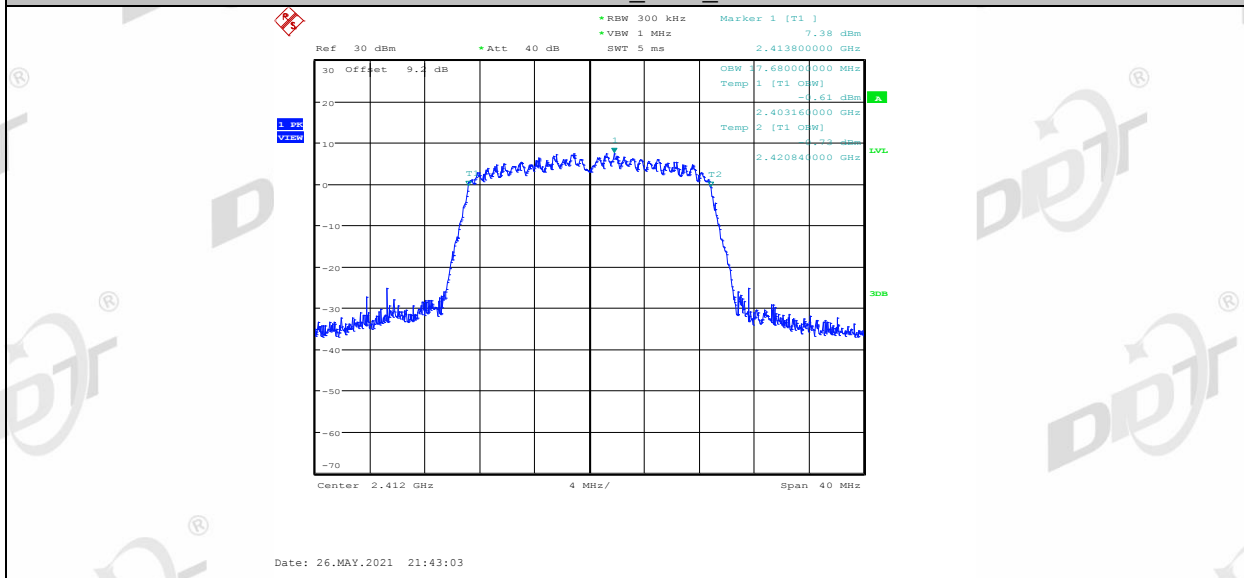


11N20MIMO_Ant1_2437

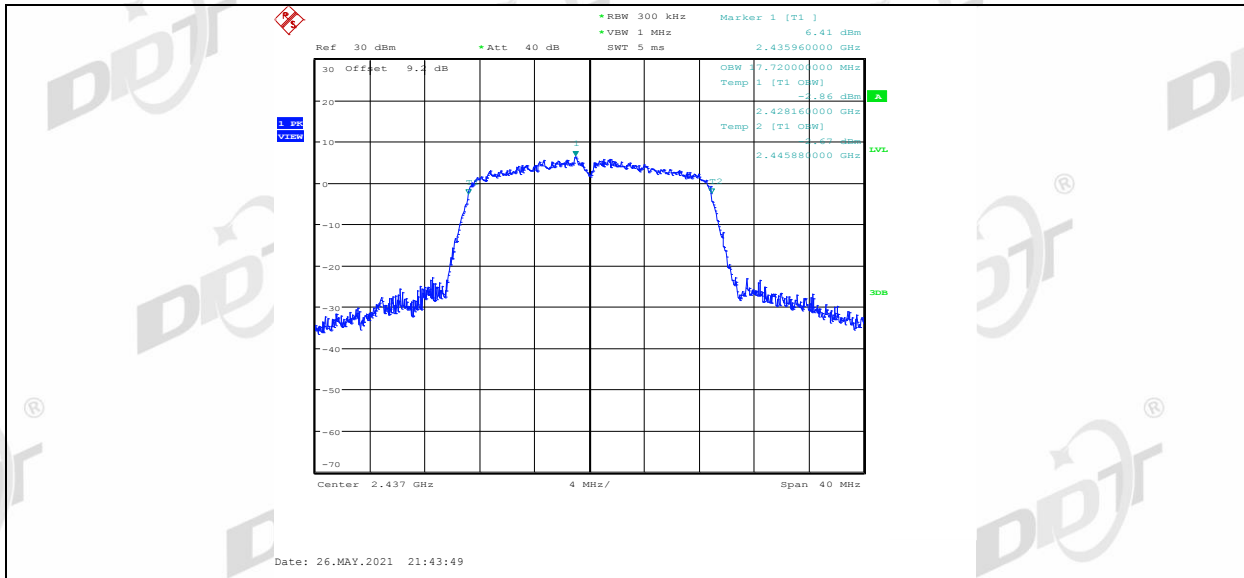


11N20MIMO_Ant2_2437

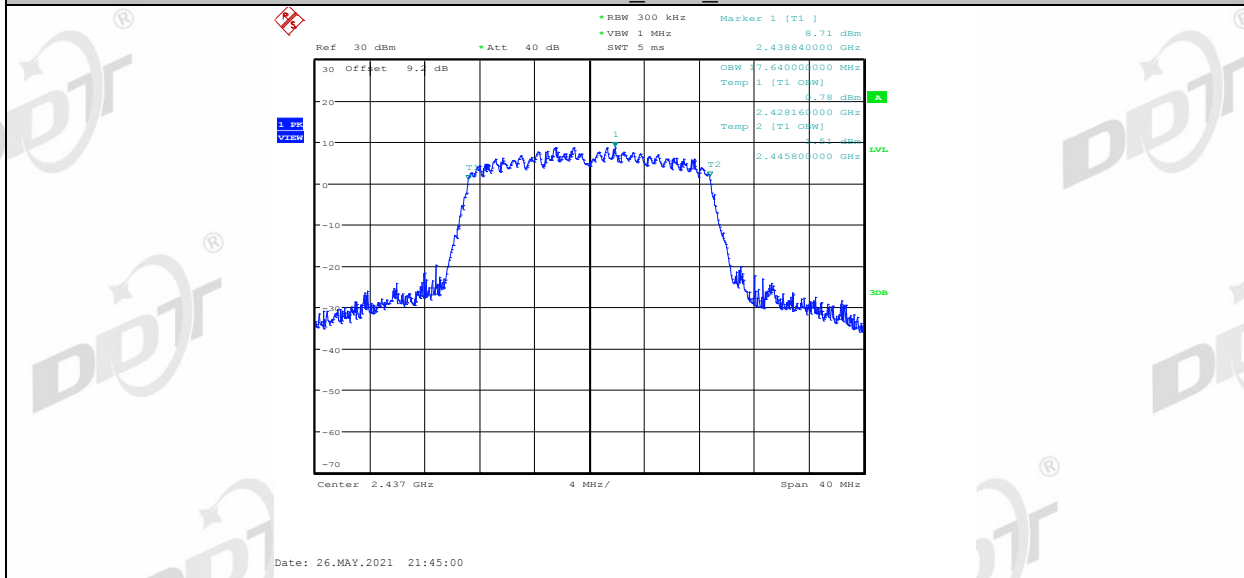


11N20MIMO_Ant1_2462

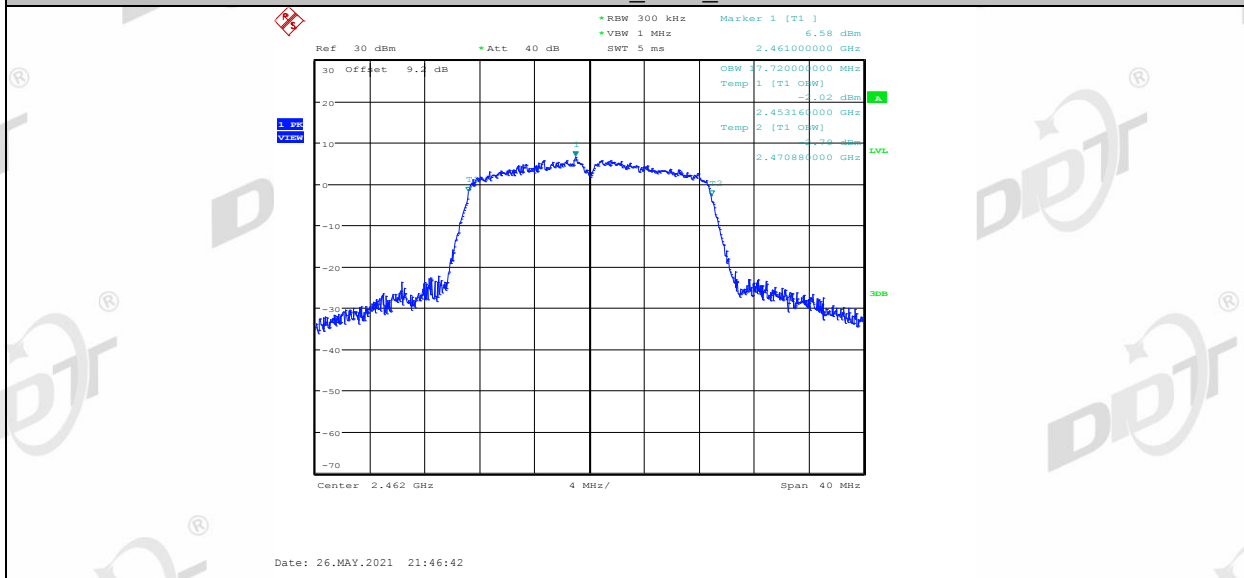


11N20MIMO_Ant2_2462

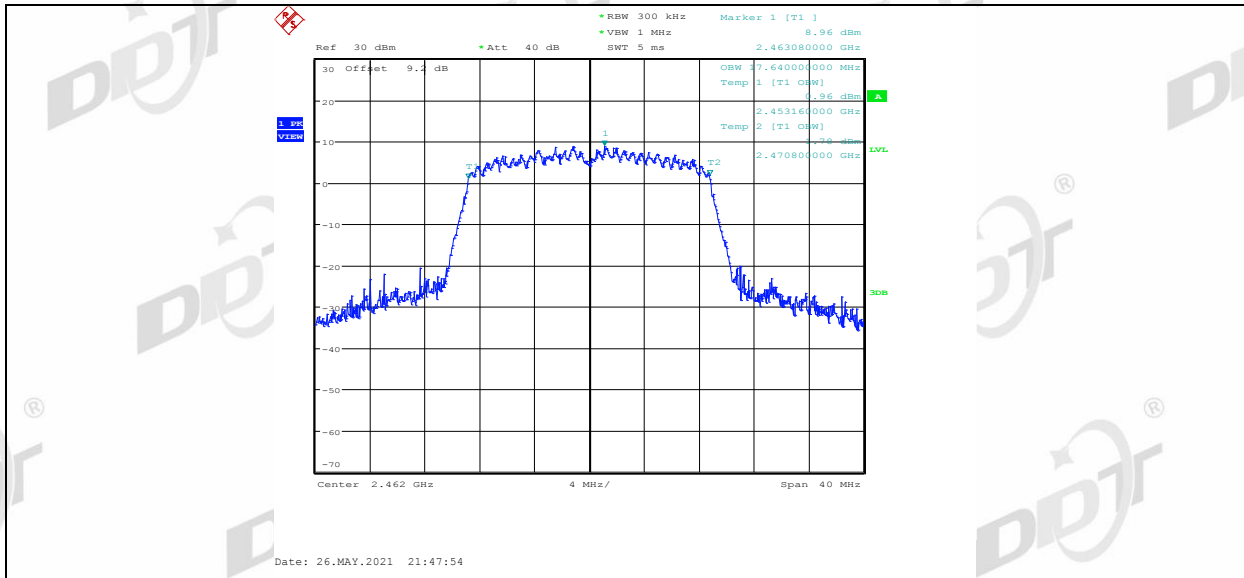


11N40MIMO_Ant1_2422

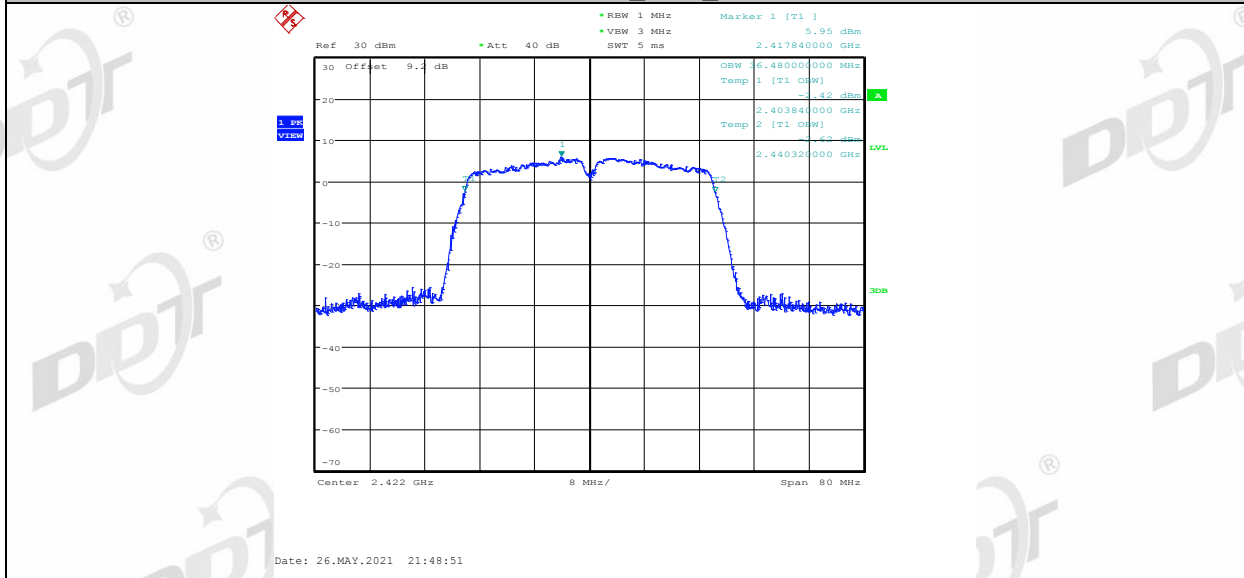


11N40MIMO_Ant2_2422

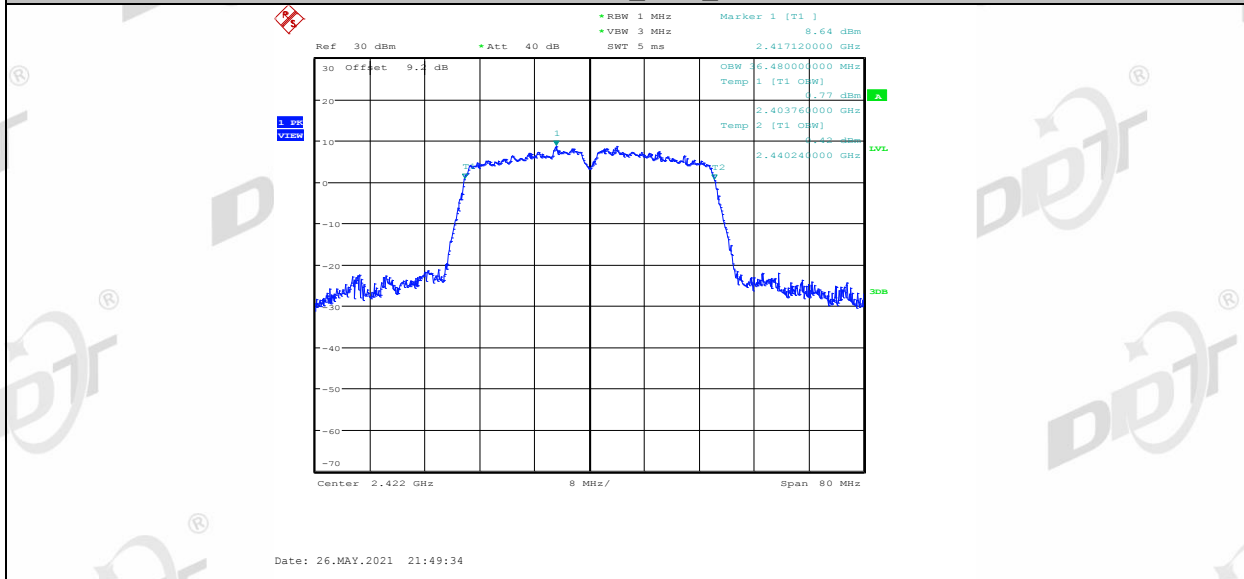


11N40MIMO_Ant1_2437

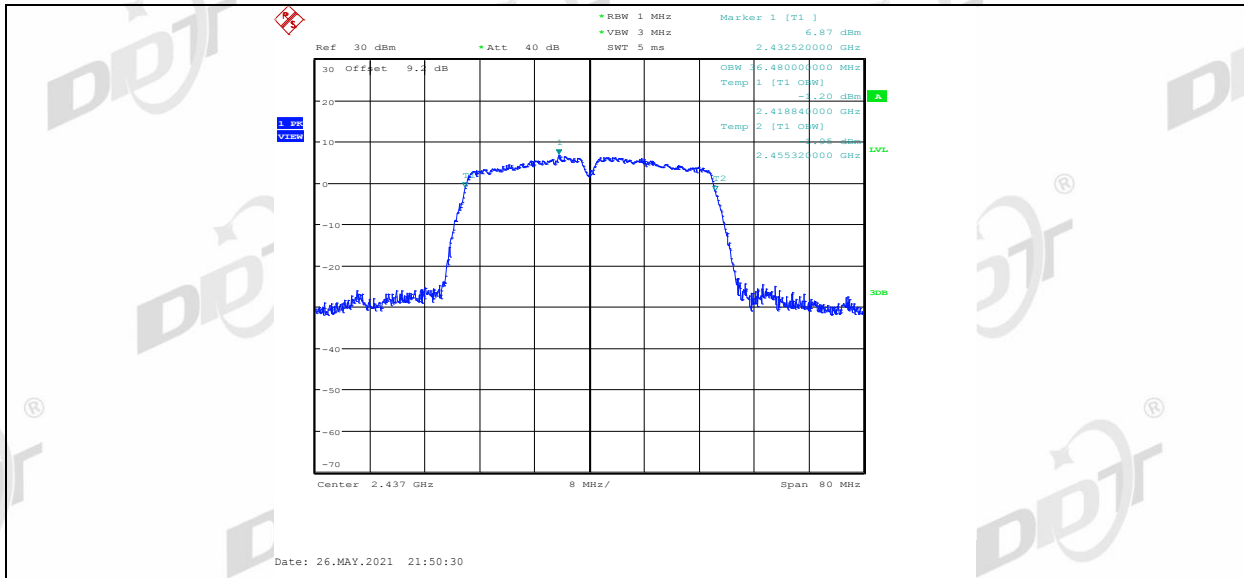

11N40MIMO_Ant2_2437

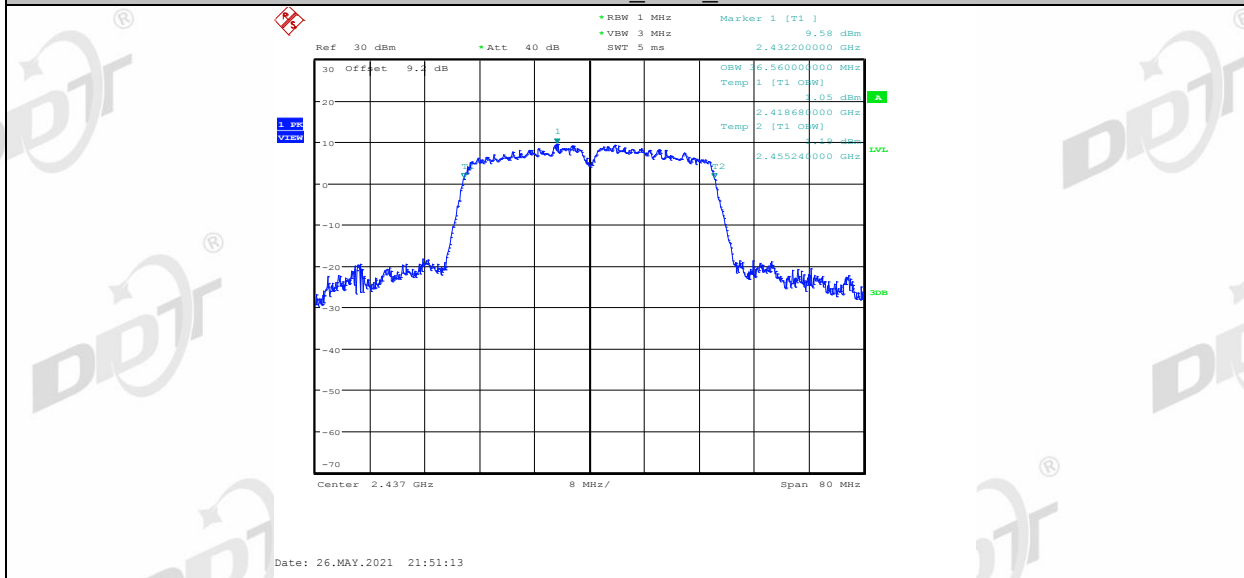

11N40MIMO_Ant1_2452

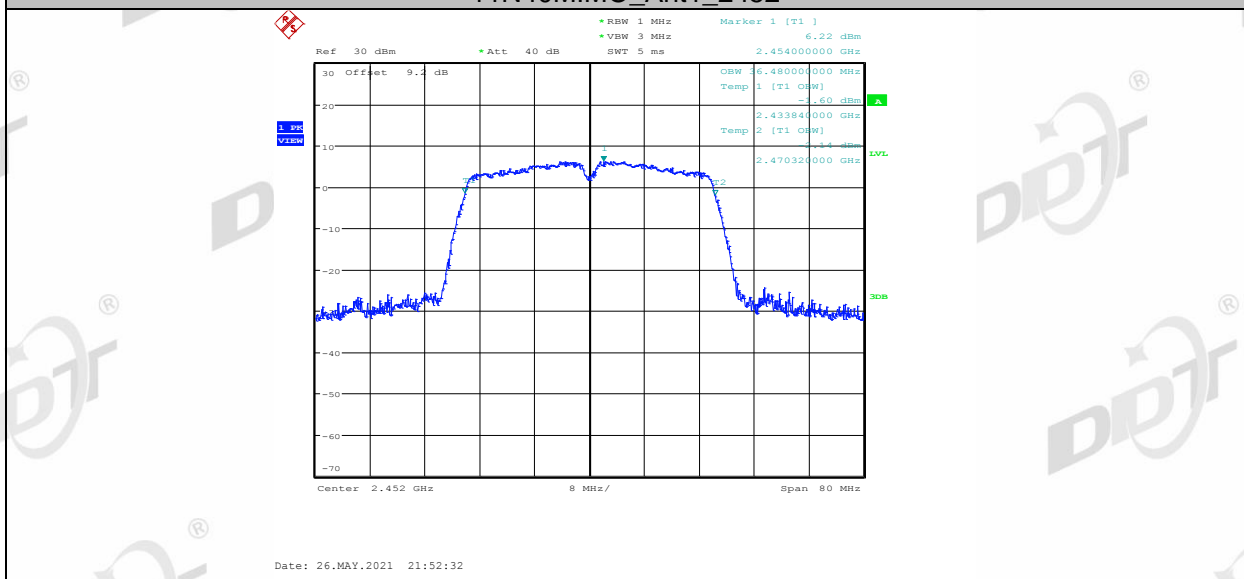

11N40MIMO_Ant2_2452

5. Conducted peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the output power of each antenna port by power sensor.

5.4. Test Result

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
11B	2412	ANT1	12.36	30	PASS
11B	2412	ANT2	14.49	30	PASS
11B	2437	ANT1	13.04	30	PASS
11B	2437	ANT2	15.64	30	PASS
11B	2462	ANT1	12.99	30	PASS
11B	2462	ANT2	15.74	30	PASS
11G	2412	ANT1	12.56	30	PASS
11G	2412	ANT2	14.58	30	PASS
11G	2437	ANT1	13.12	30	PASS
11G	2437	ANT2	15.71	30	PASS
11G	2462	ANT1	13.07	30	PASS
11G	2462	ANT2	15.68	30	PASS
11N20MIMO	2412	ANT1	10.32	30	PASS
11N20MIMO	2412	ANT2	12.68	30	PASS
11N20MIMO	2412	total	14.67	30	PASS
11N20MIMO	2437	ANT1	11.09	30	PASS
11N20MIMO	2437	ANT2	13.78	30	PASS
11N20MIMO	2437	total	15.65	30	PASS
11N20MIMO	2462	ANT1	11.01	30	PASS
11N20MIMO	2462	ANT2	13.68	30	PASS
11N20MIMO	2462	total	15.56	30	PASS

11N40MIMO	2422	ANT1	8.29	30	PASS
11N40MIMO	2422	ANT2	13.25	30	PASS
11N40MIMO	2422	total	14.45	30	PASS
11N40MIMO	2437	ANT1	8.55	30	PASS
11N40MIMO	2437	ANT2	11.17	30	PASS
11N40MIMO	2437	total	13.06	30	PASS
11N40MIMO	2452	ANT1	8.44	30	PASS
11N40MIMO	2452	ANT2	11.12	30	PASS
11N40MIMO	2452	total	12.99	30	PASS

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold


- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test Result


Test Mode	Test Channel	Ant	PSD [dBm]	Limit[dBm/kHz]	Verdict
11B	2412	ANT1	-12.61	8.00	PASS
11B	2412	ANT2	-11.02	8.00	PASS
11B	2437	ANT1	-12.83	8.00	PASS
11B	2437	ANT2	-9.09	8.00	PASS
11B	2462	ANT1	-11.38	8.00	PASS
11B	2462	ANT2	-9.61	8.00	PASS
11G	2412	ANT1	-14.60	8.00	PASS
11G	2412	ANT2	-12.55	8.00	PASS
11G	2437	ANT1	-14.25	8.00	PASS
11G	2437	ANT2	-12.24	8.00	PASS
11G	2462	ANT1	-13.91	8.00	PASS
11G	2462	ANT2	-11.28	8.00	PASS

11N20MIMO	2412	ANT1	-16.65	8.00	PASS
11N20MIMO	2412	ANT2	-13.73	8.00	PASS
11N20MIMO	2412	total	-11.94	8.00	PASS
11N20MIMO	2437	ANT1	-15.56	8.00	PASS
11N20MIMO	2437	ANT2	-13.84	8.00	PASS
11N20MIMO	2437	total	-11.61	8.00	PASS
11N20MIMO	2462	ANT1	-16.45	8.00	PASS
11N20MIMO	2462	ANT2	-13.32	8.00	PASS
11N20MIMO	2462	total	-11.60	8.00	PASS
11N40MIMO	2422	ANT1	-21.66	8.00	PASS
11N40MIMO	2422	ANT2	-19.55	8.00	PASS
11N40MIMO	2422	total	-17.47	8.00	PASS
11N40MIMO	2437	ANT1	-20.96	8.00	PASS
11N40MIMO	2437	ANT2	-18.17	8.00	PASS
11N40MIMO	2437	total	-16.33	8.00	PASS
11N40MIMO	2452	ANT1	-20.72	8.00	PASS
11N40MIMO	2452	ANT2	-18.58	8.00	PASS
11N40MIMO	2452	total	-16.51	8.00	PASS


6.5. Original Test Data

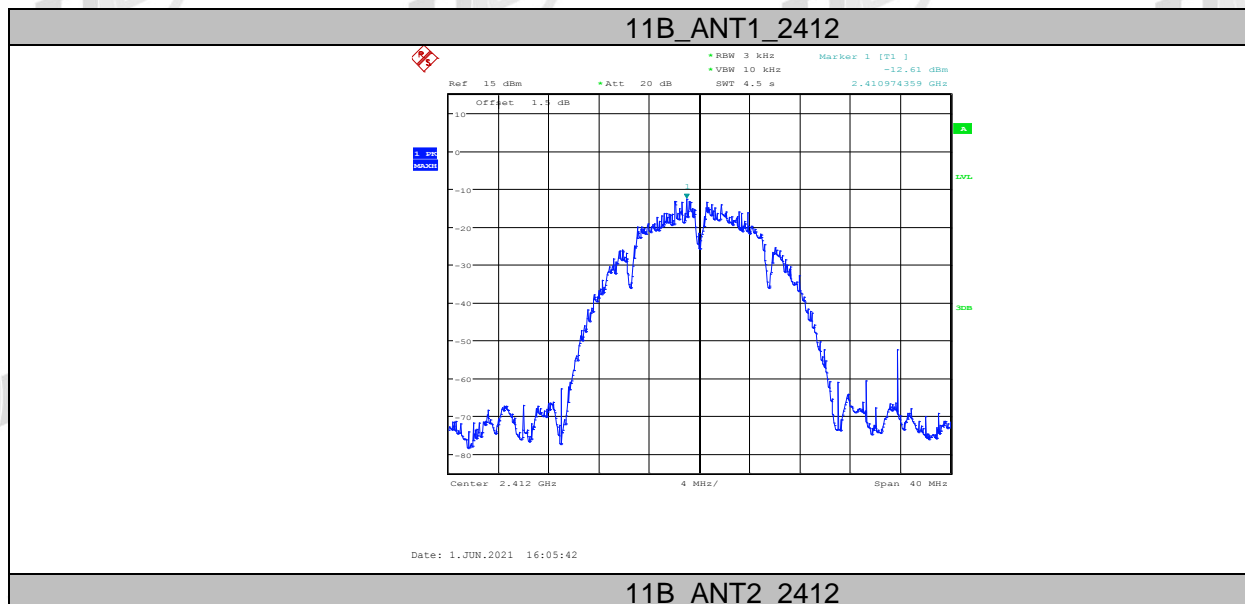


11B_ANT2_2412

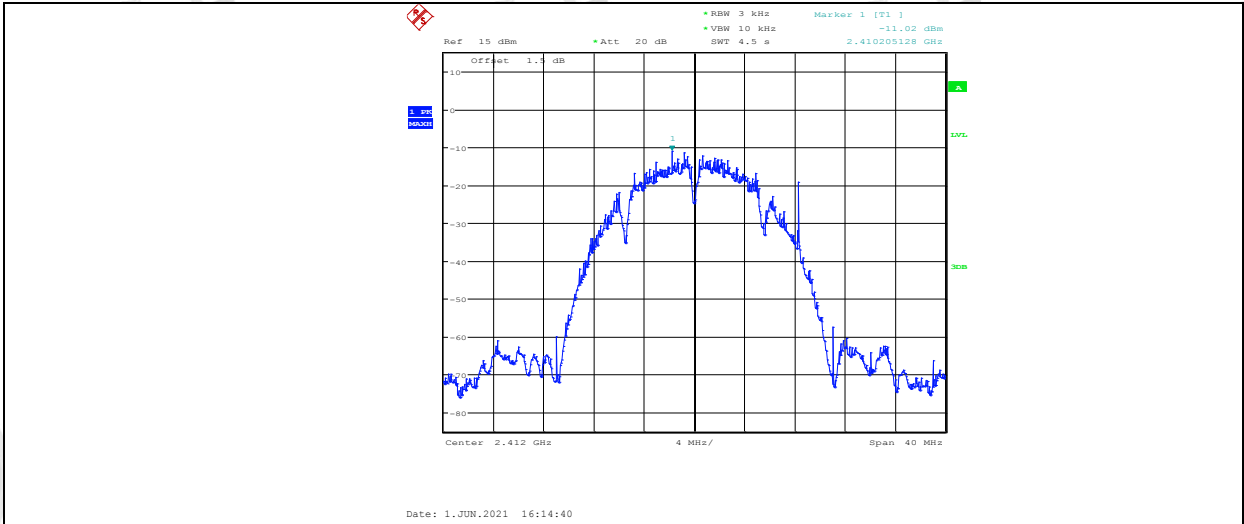


11B_ANT1_2437

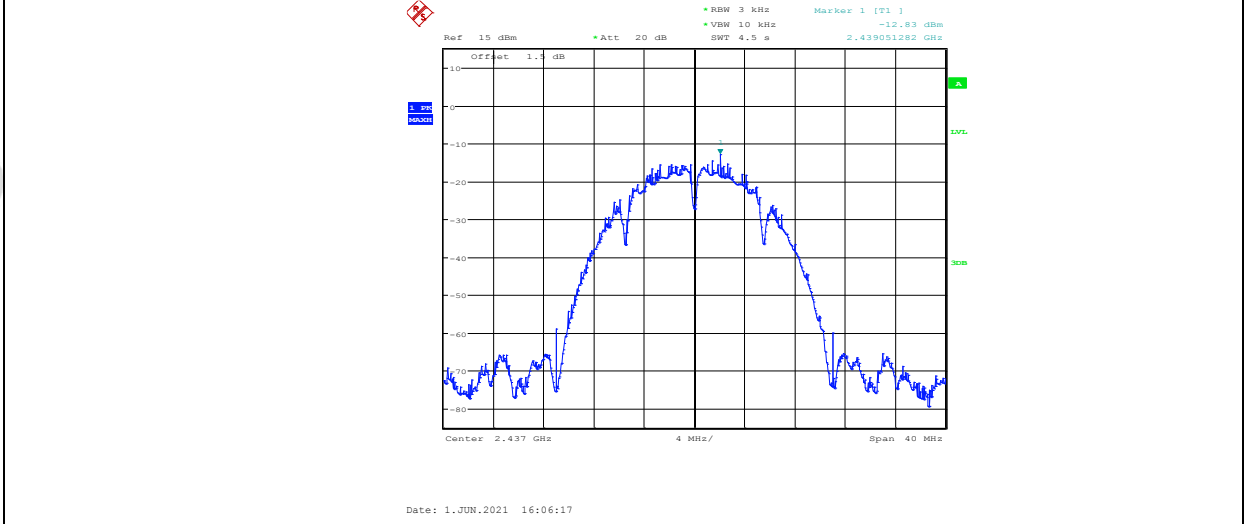


11B_ANT2_2437

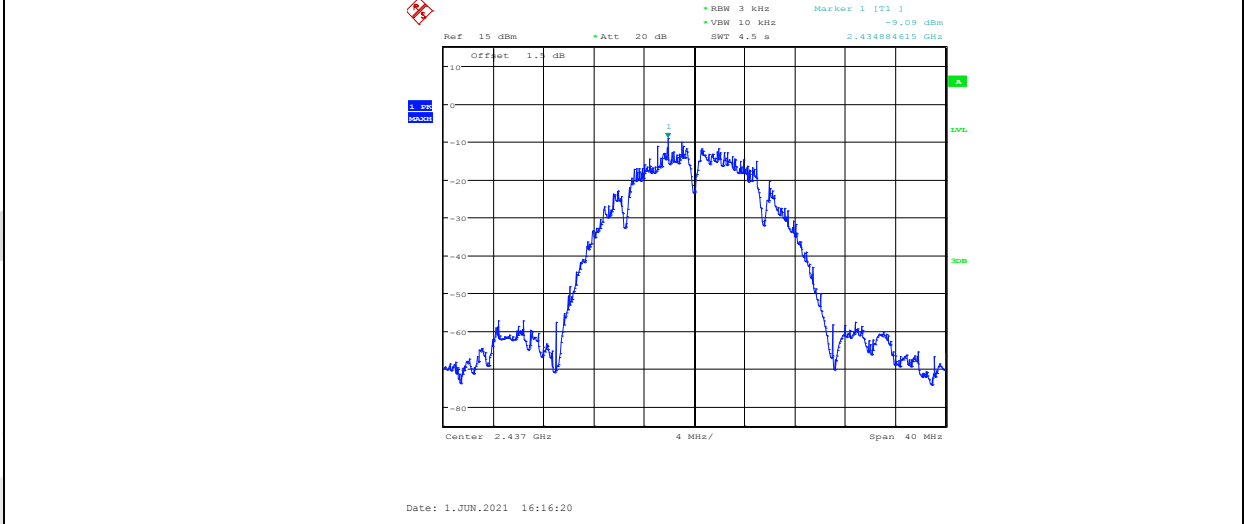


11B_ANT1_2462

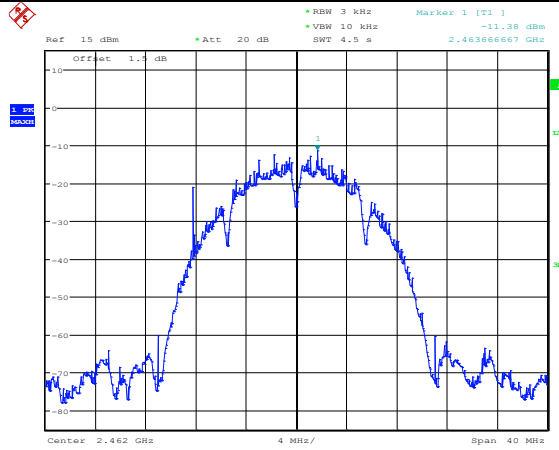


11B_ANT2_2462

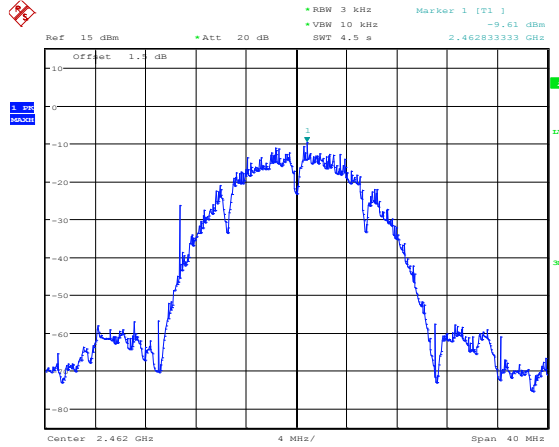


11G_ANT1_2412

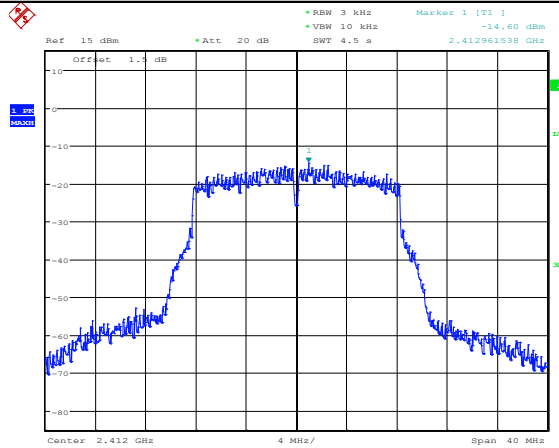


11G_ANT2_2412

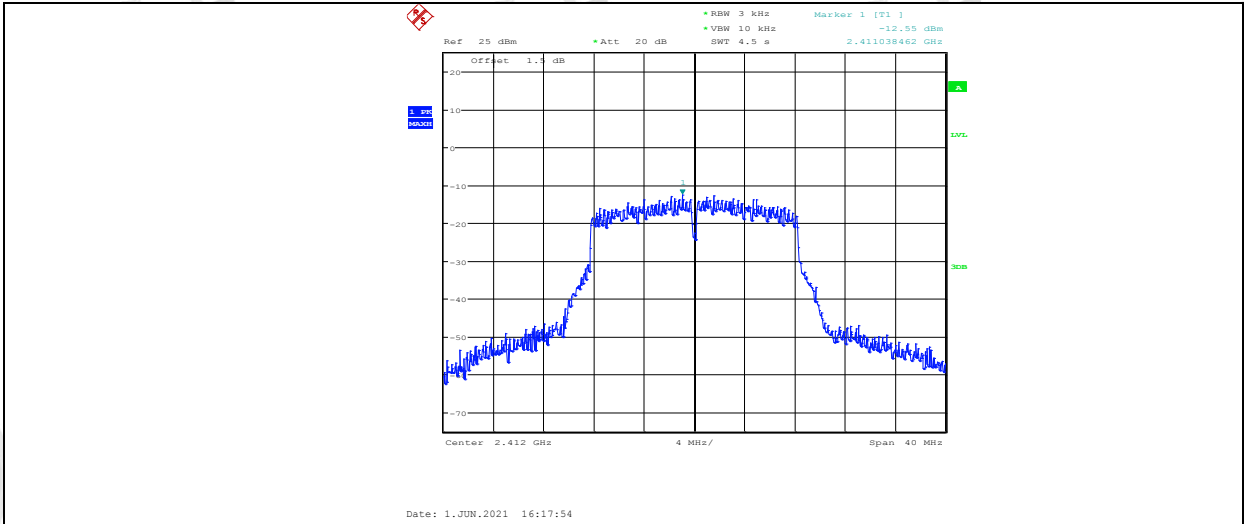


11G_ANT1_2437

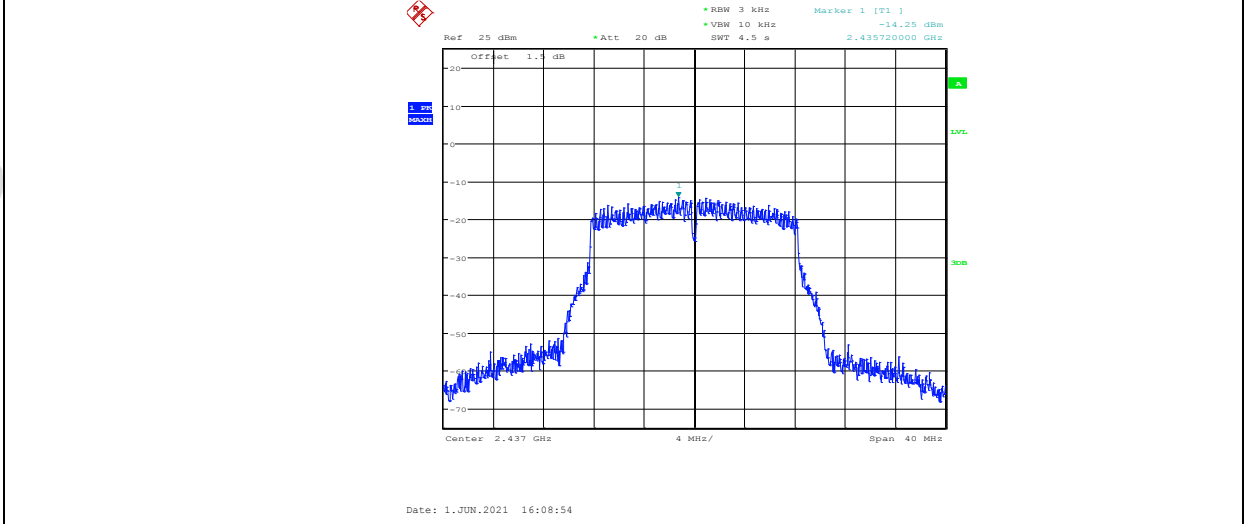


11G_ANT2_2437

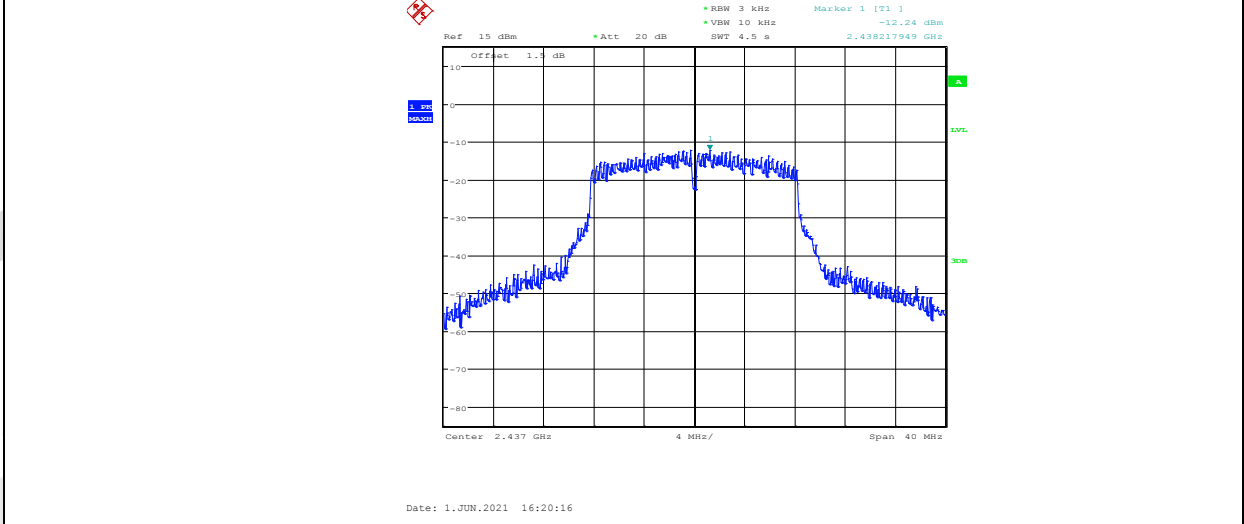


11G_ANT1_2462

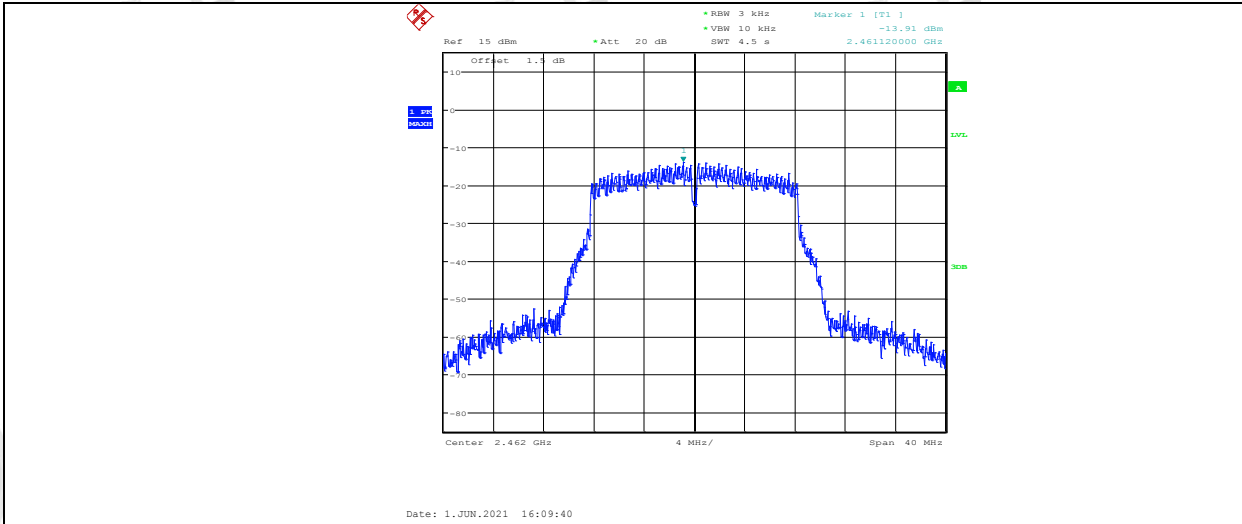


11G_ANT2_2462

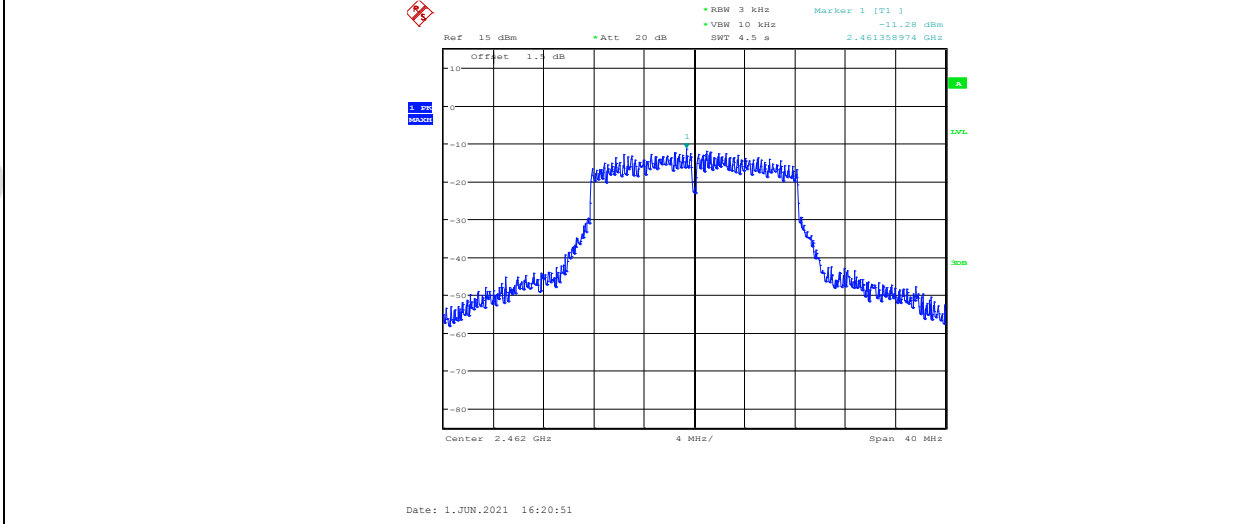

11N20MIMO_ANT1_2412

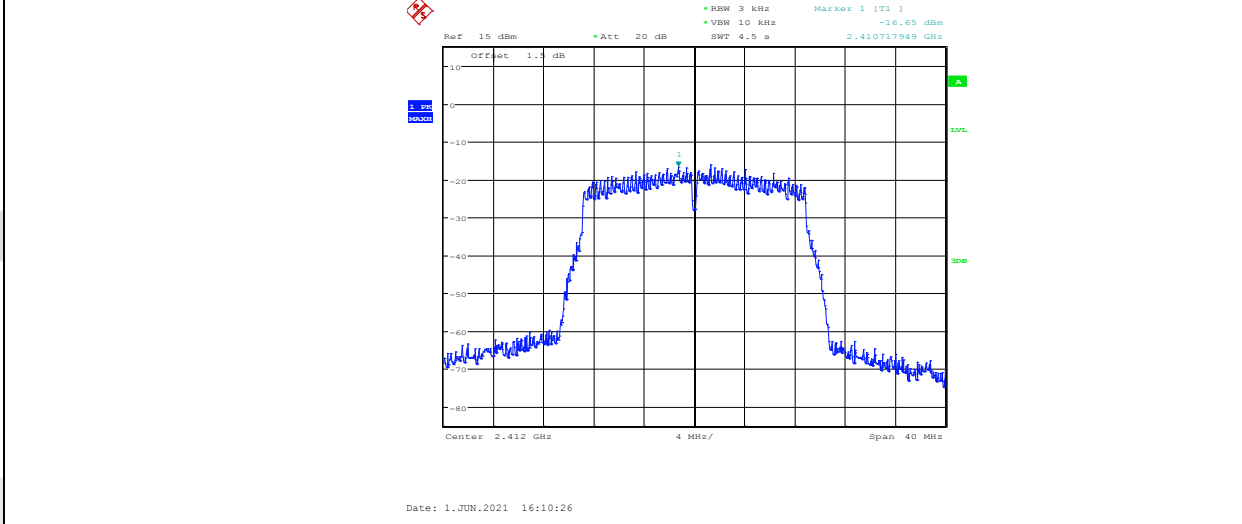


11N20MIMO_ANT2_2412

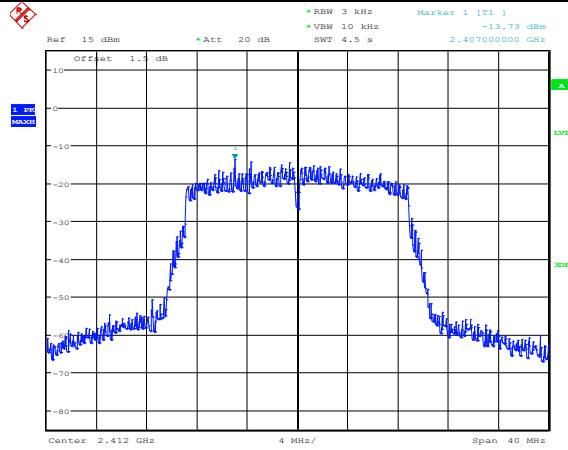


Date: 1.JUN.2021 16:21:36

11N20MIMO_ANT1_2437

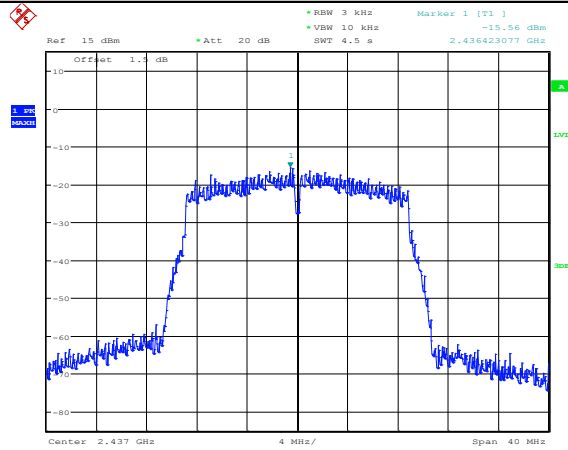


Date: 1.JUN.2021 16:11:03

11N20MIMO_ANT2_2437

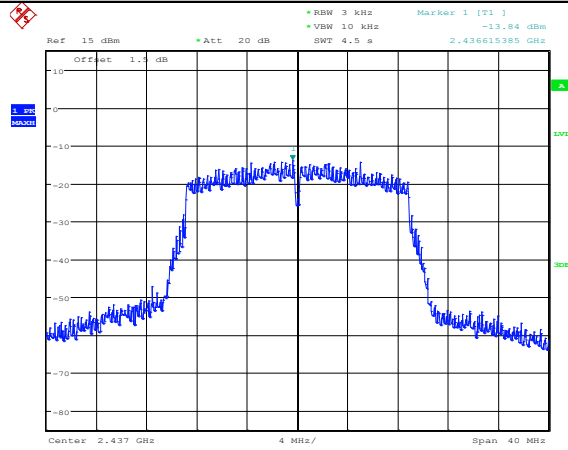


Date: 1.JUN.2021 16:22:08


11N20MIMO_ANT1_2462

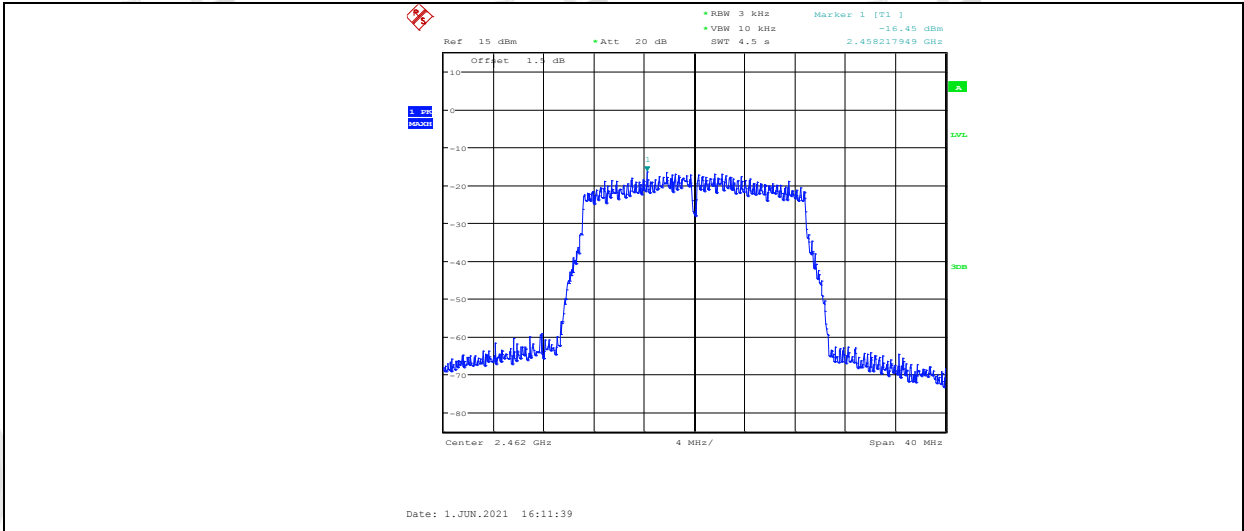


11N20MIMO_ANT2_2462

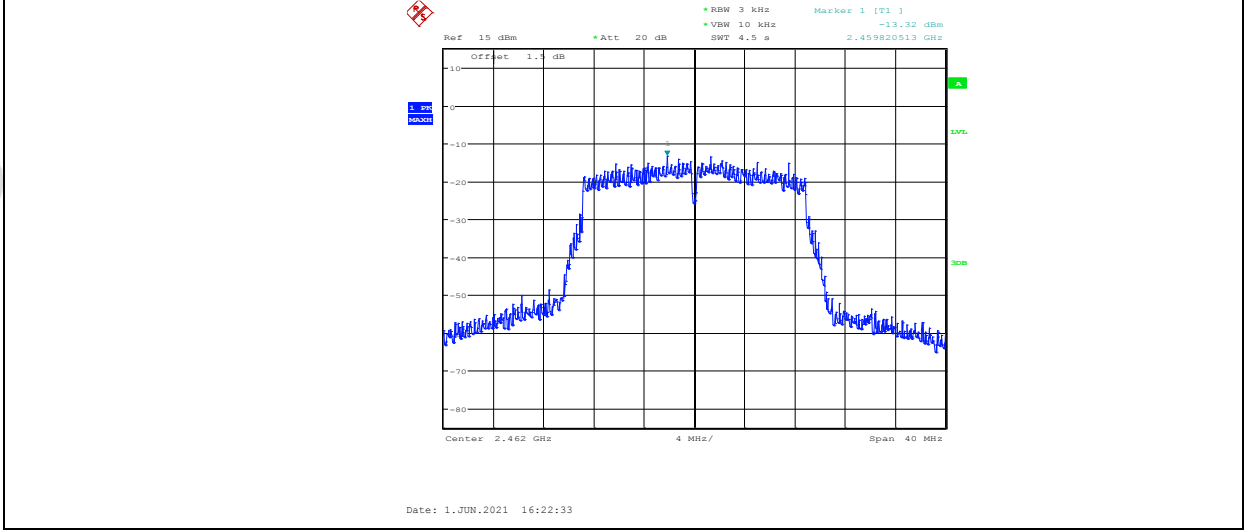

11N40MIMO_ANT1_2422

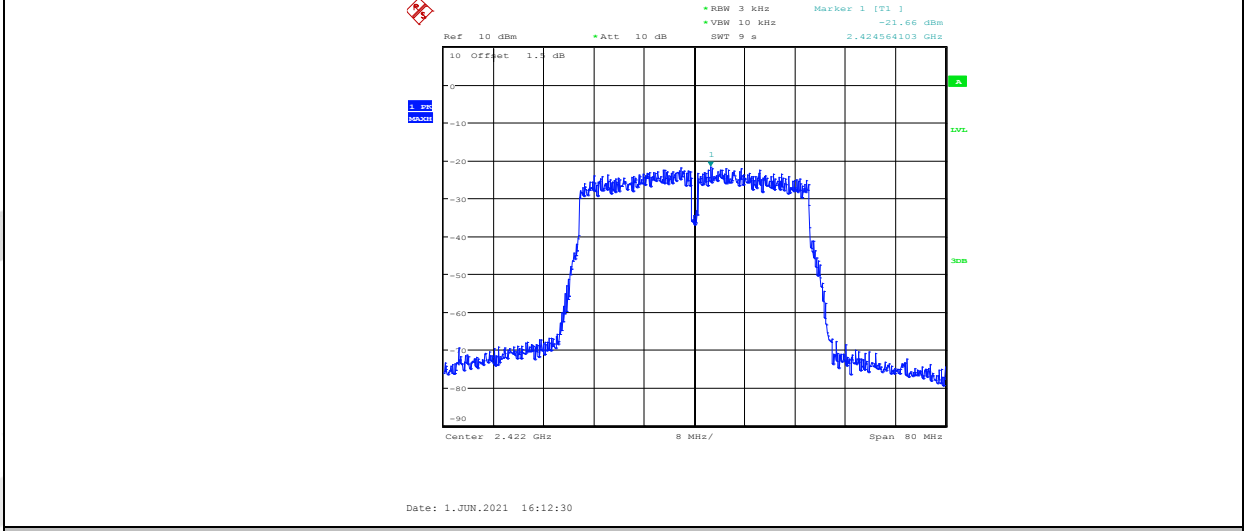


11N40MIMO_ANT2_2422

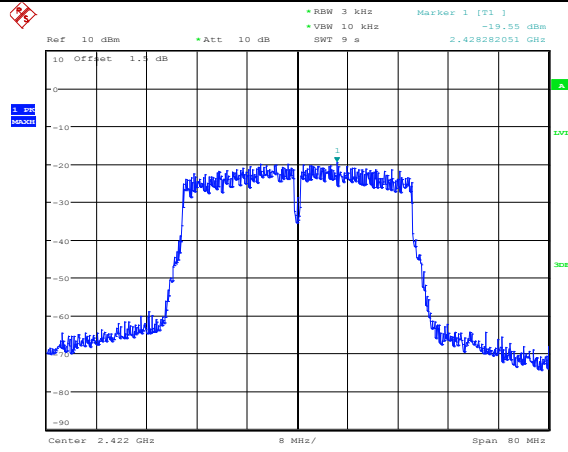


Date: 1.JUN.2021 16:23:13

11N40MIMO_ANT1_2437

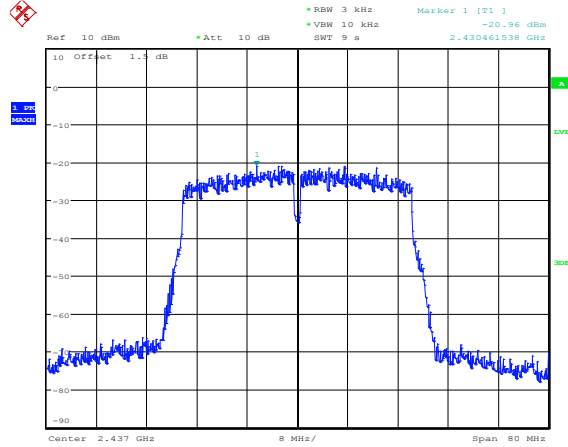


Date: 1.JUN.2021 16:13:00

11N40MIMO_ANT2_2437

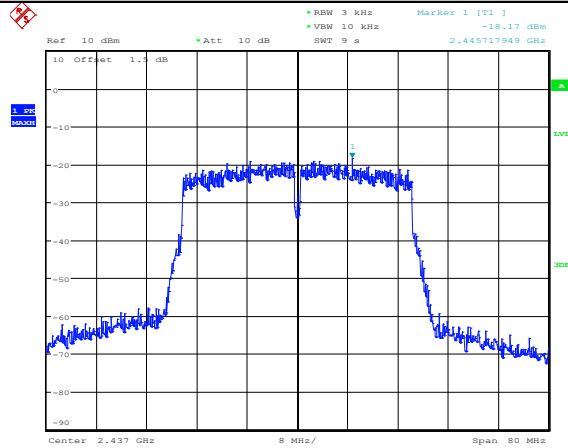


Date: 1.JUN.2021 16:23:44

11N40MIMO_ANT1_2452

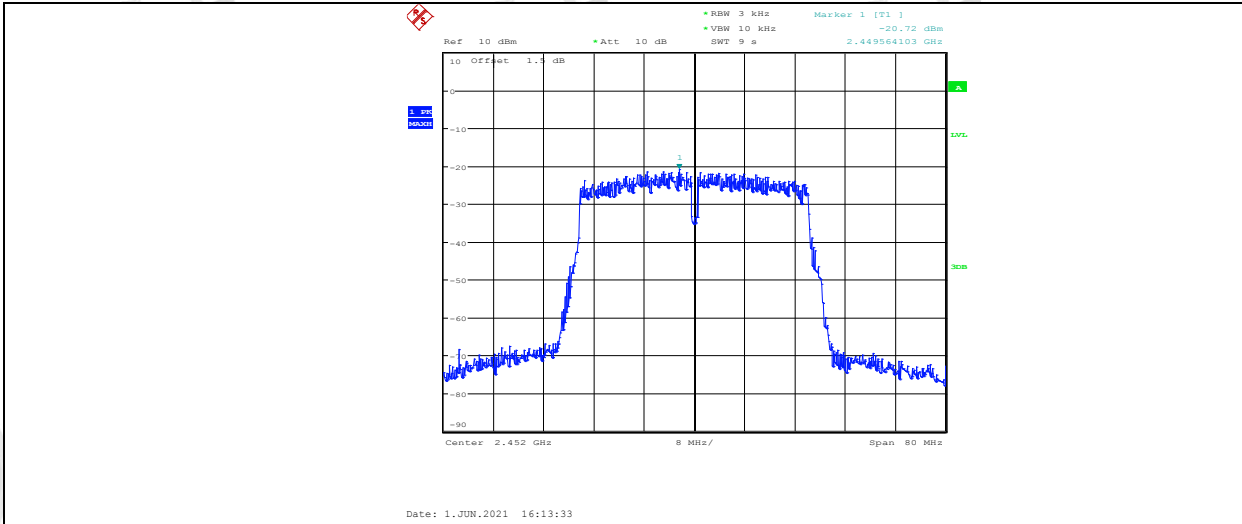

11N40MIMO_ANT2_2452

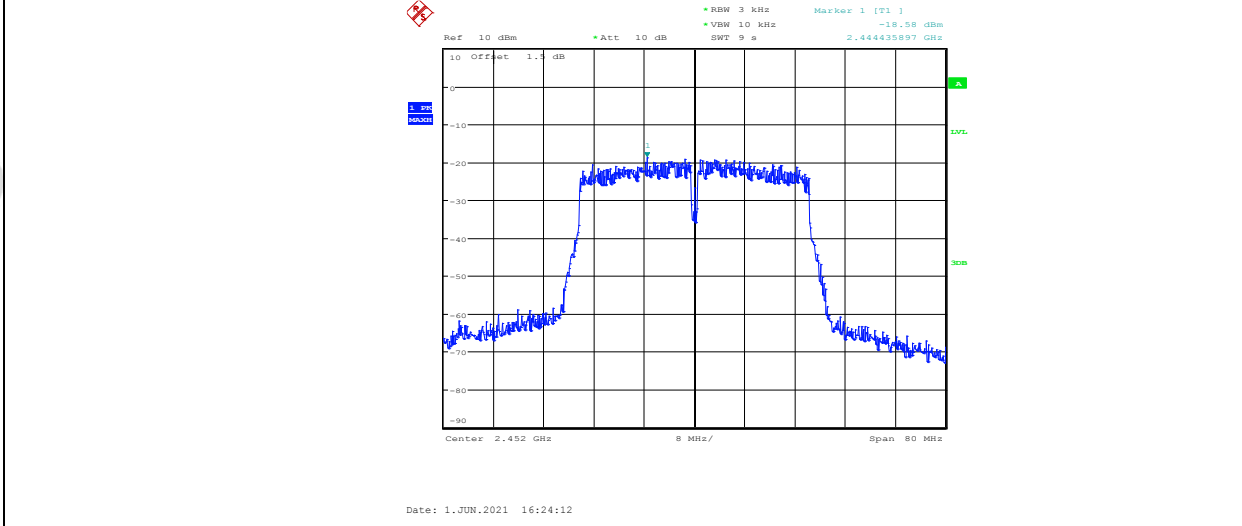

7. Band Edge and Spurious Emissions (Conducted)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


7.4. Test Result


EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11b	CH1	PASS	11n HT 20	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11g	CH1	PASS	11n HT 40	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS

EUT Set Mode	CH or Frequency	Ant2 Result (dBm)	EUT Set Mode	CH or Frequency	Ant2 Result (dBm)
11b	CH1	PASS	11n HT 20	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11g	CH1	PASS	11n HT 40	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS


7.5. Original test data

Band Edge

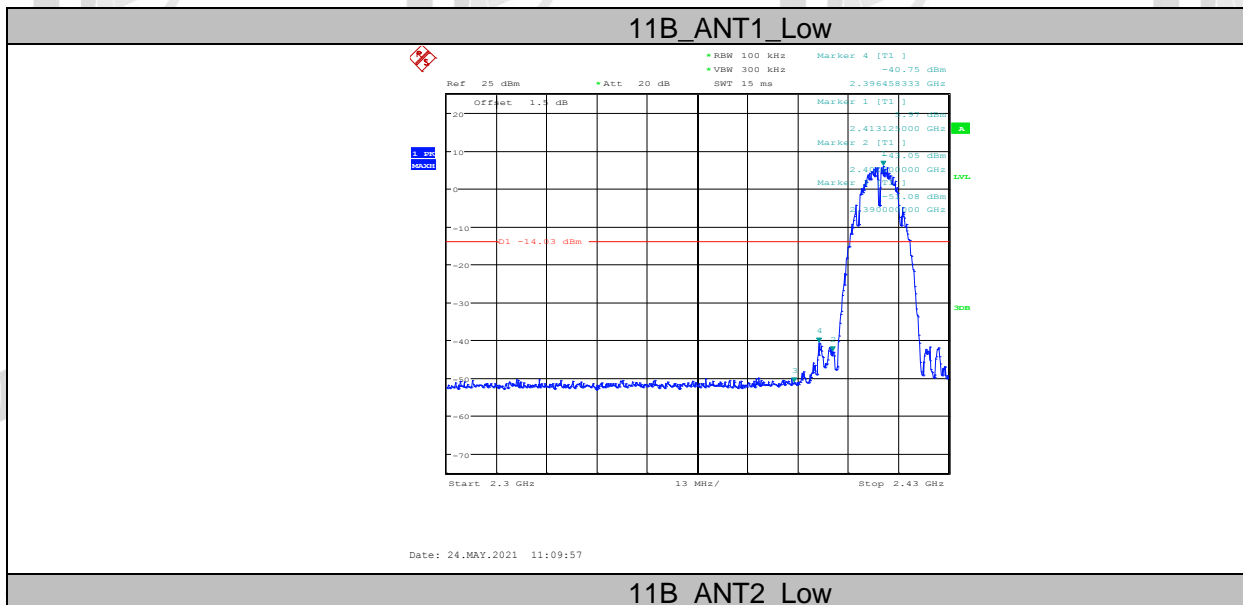


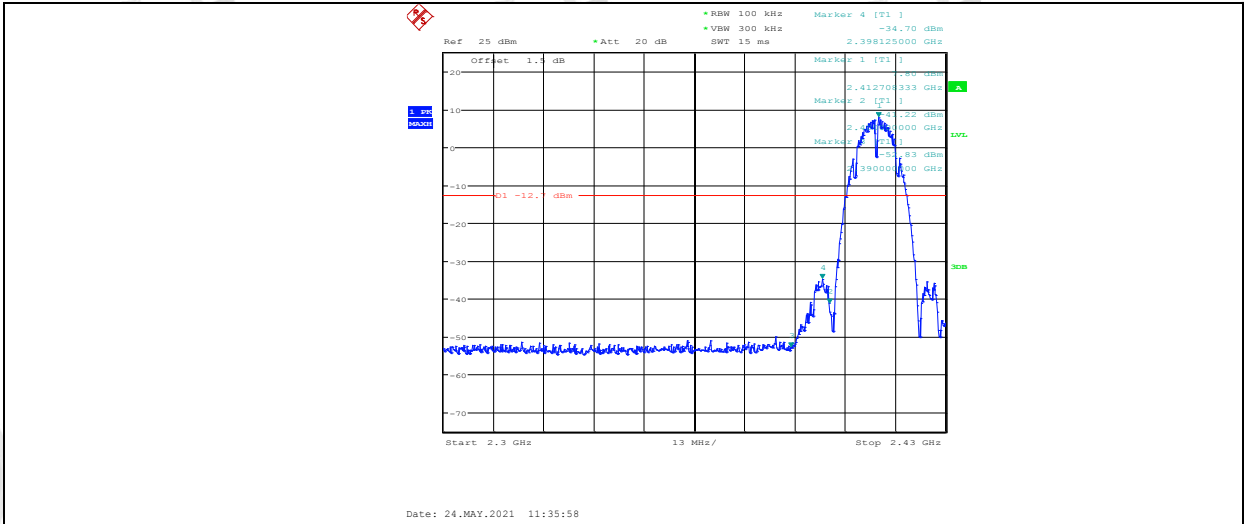


11B_ANT1_High

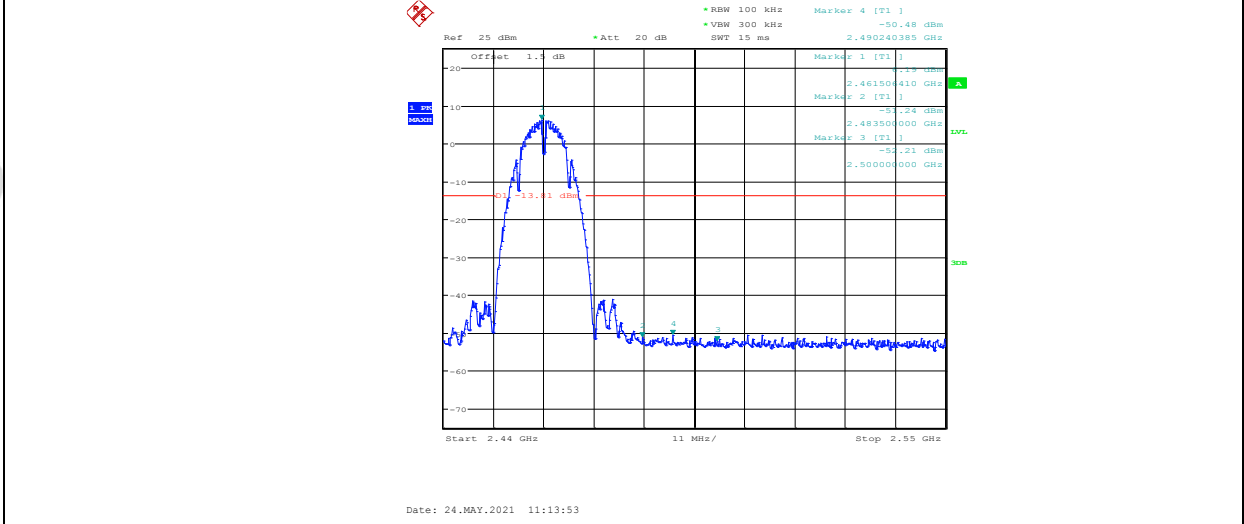


11B_ANT2_High

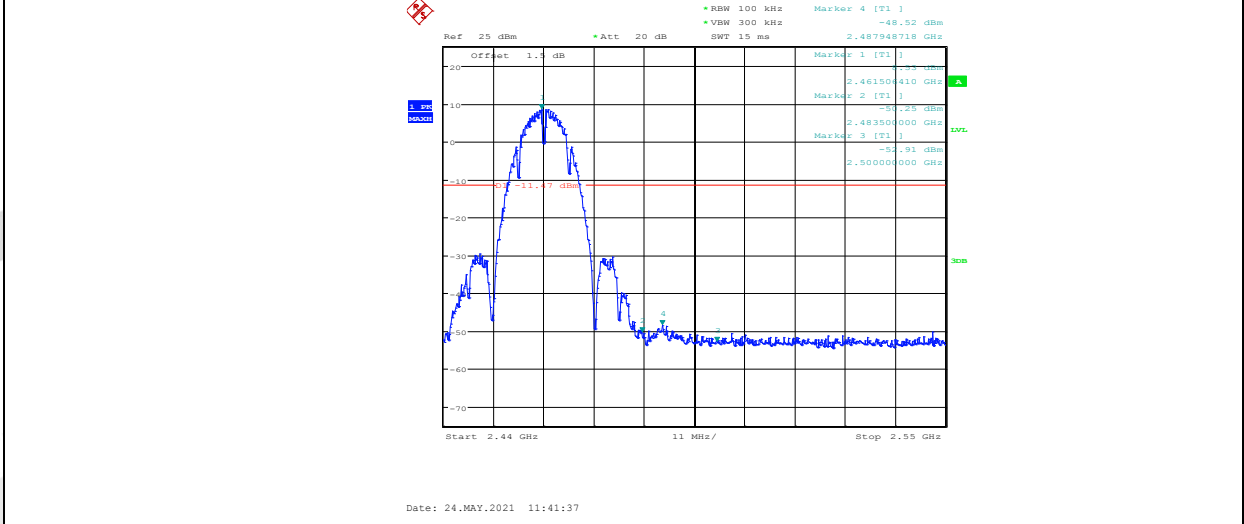


11G_ANT1_Low

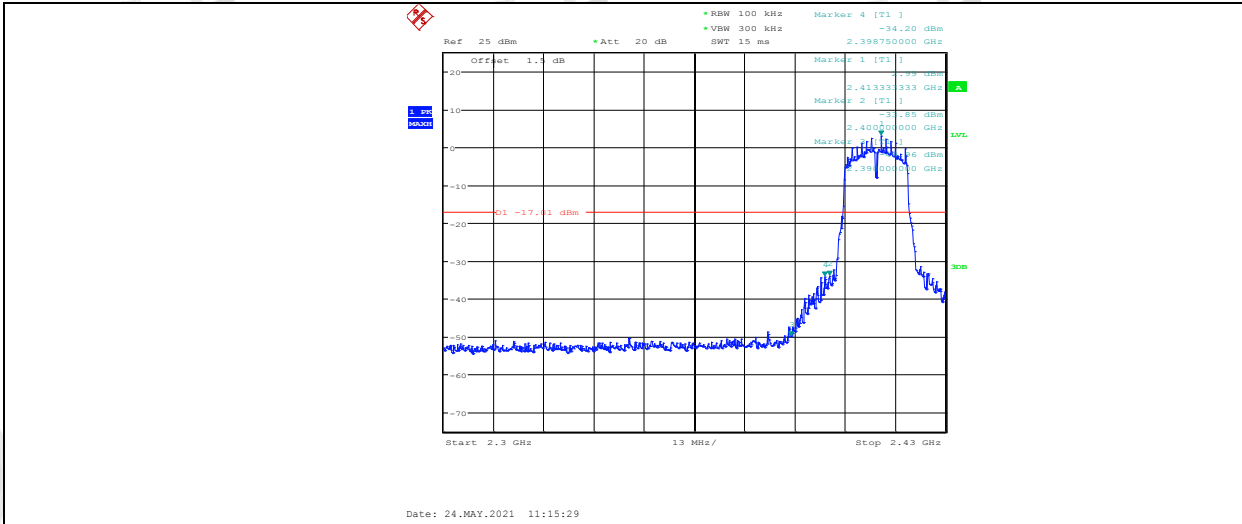


11G_ANT2_Low

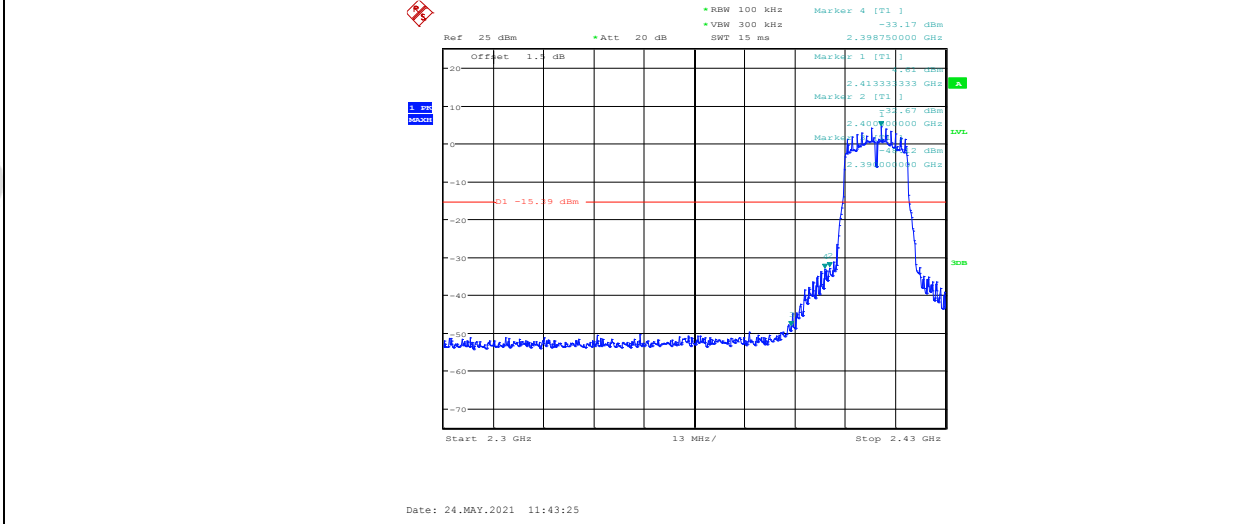


11G_ANT1_High

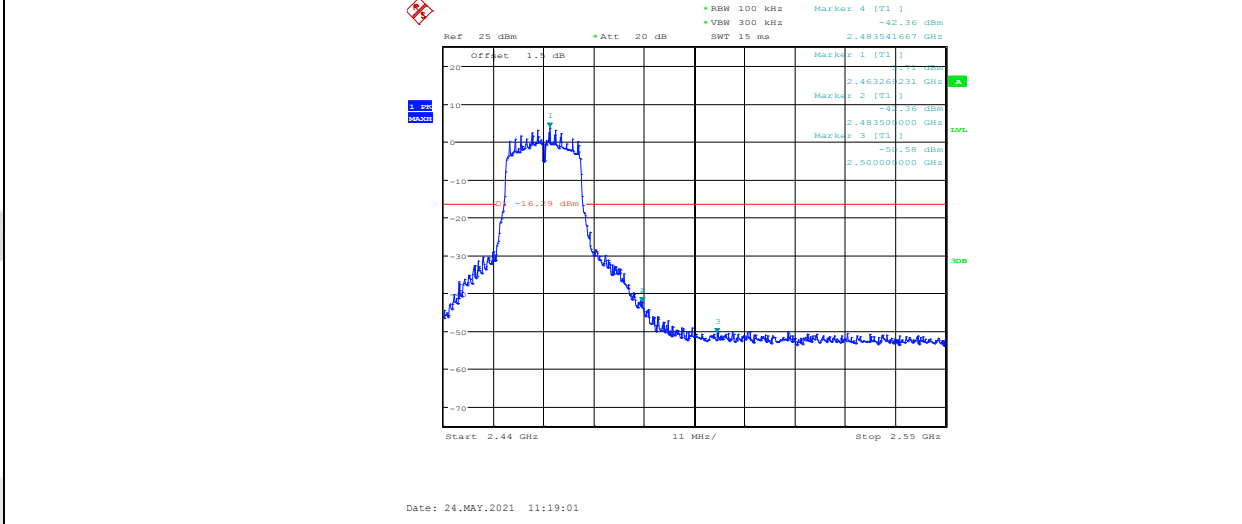


11G_ANT2_High

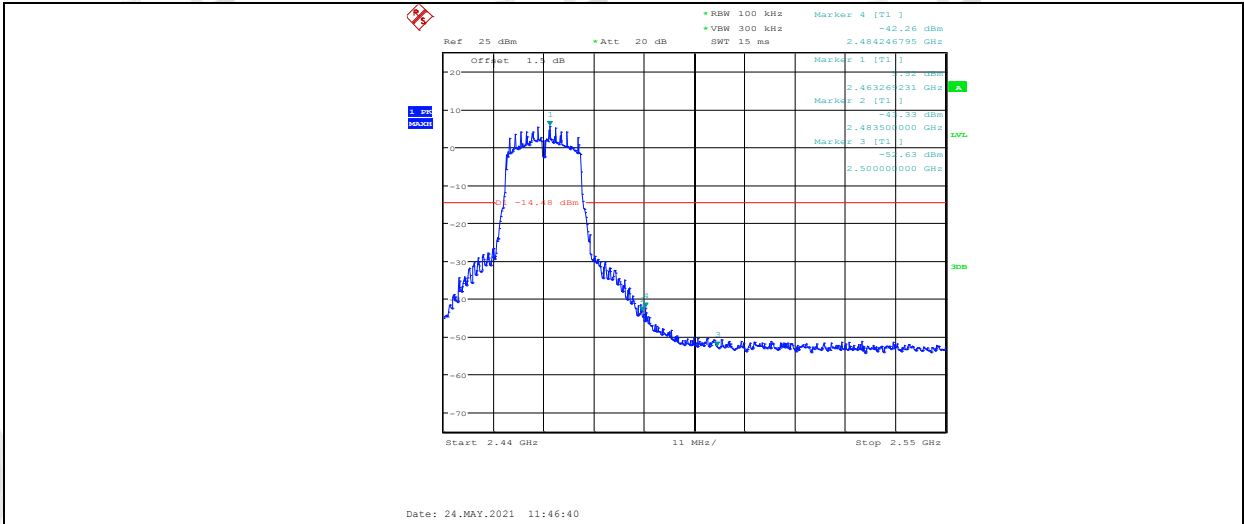


11N20MIMO_ANT1_Low

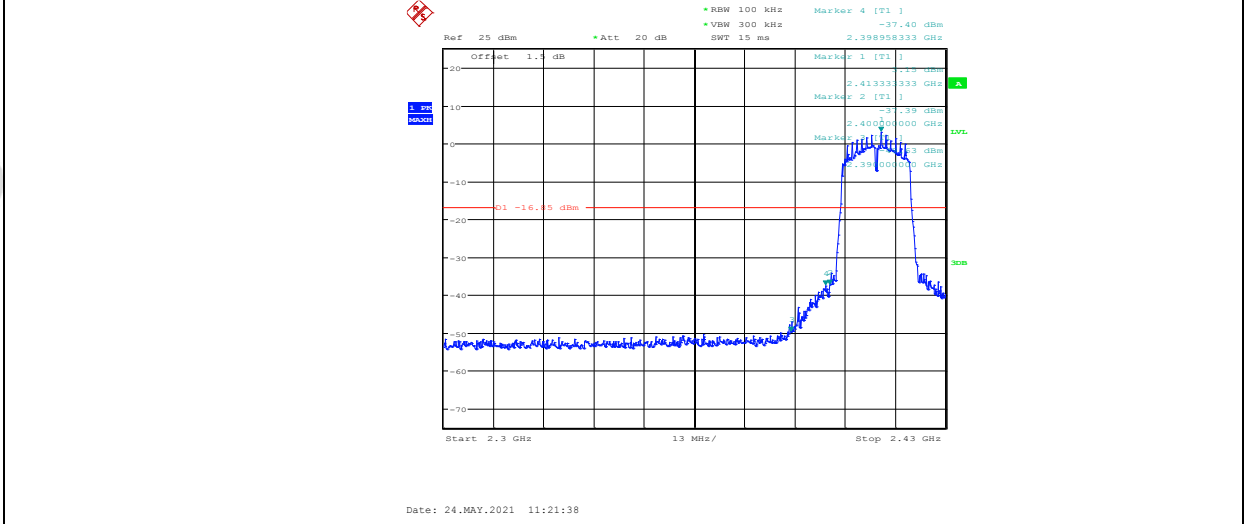


11N20MIMO_ANT2_Low

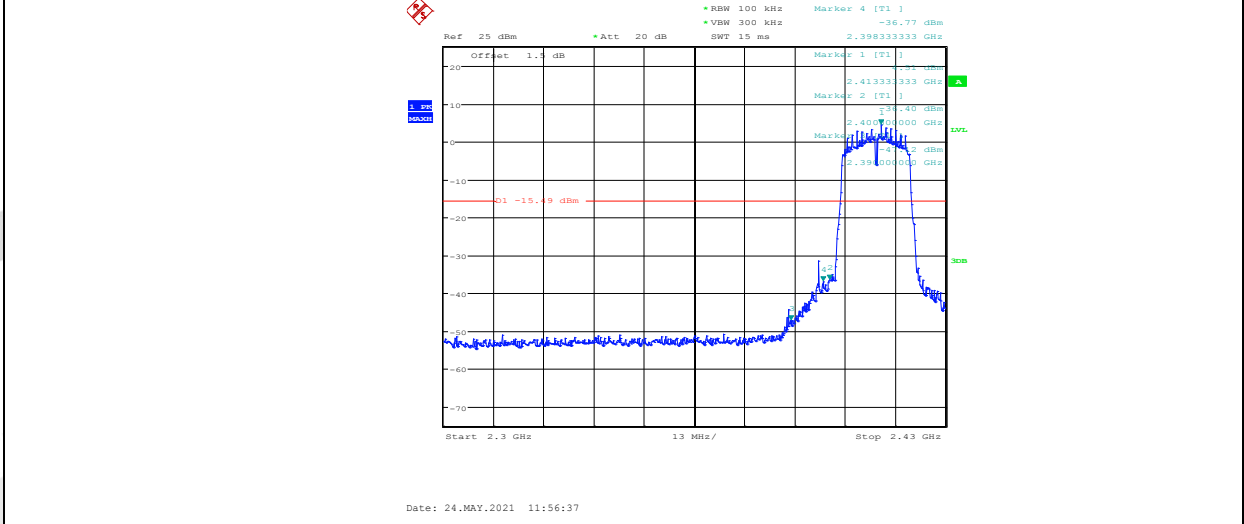


11N20MIMO_ANT1_High

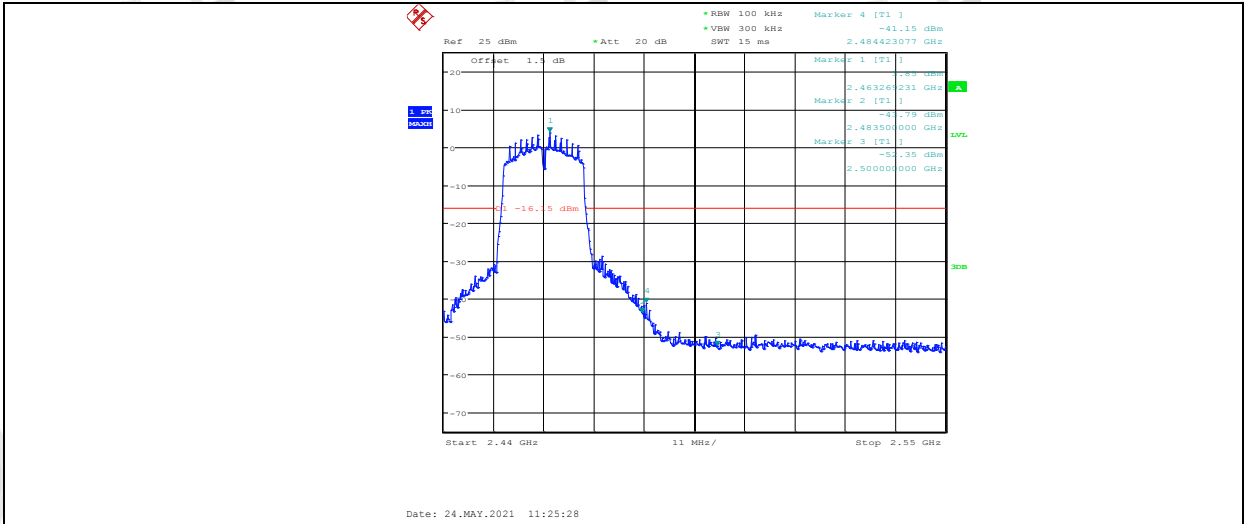


11N20MIMO_ANT2_High

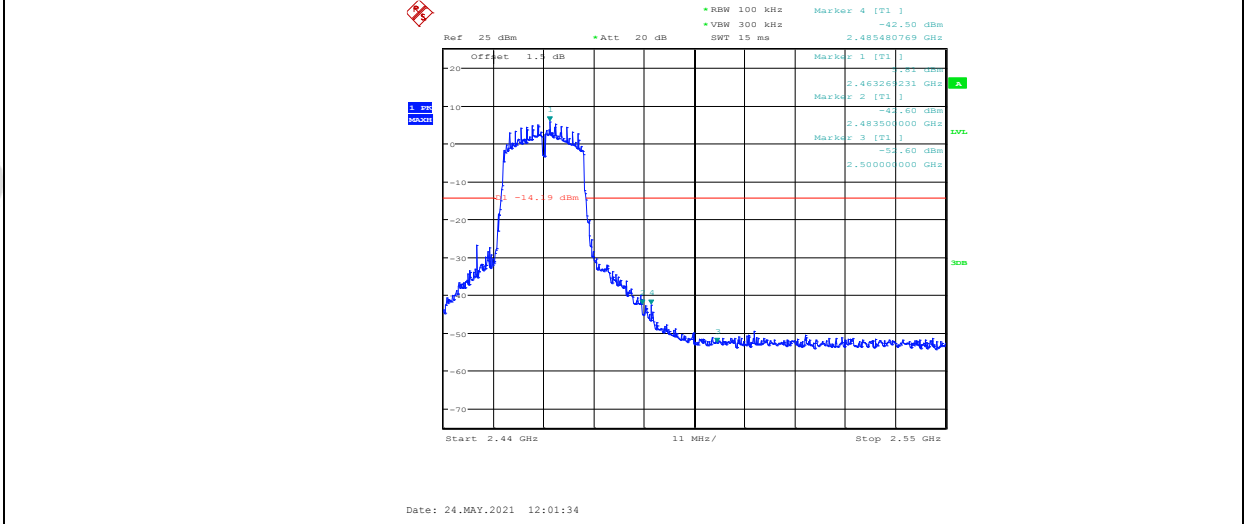


11N40MIMO_ANT1_Low

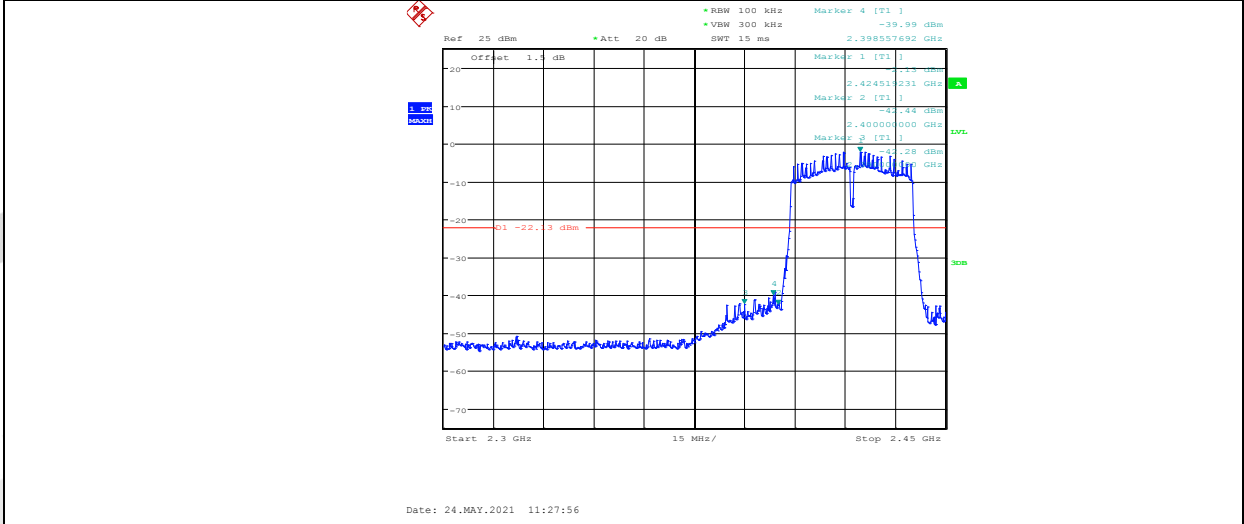


11N40MIMO_ANT2_Low

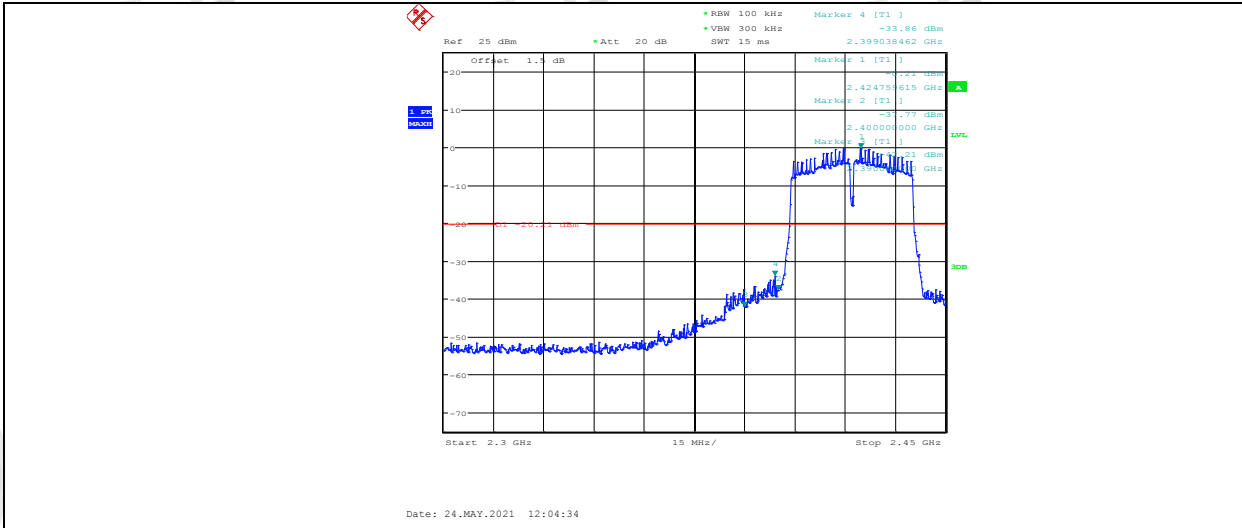




11N40MIMO_ANT1_High

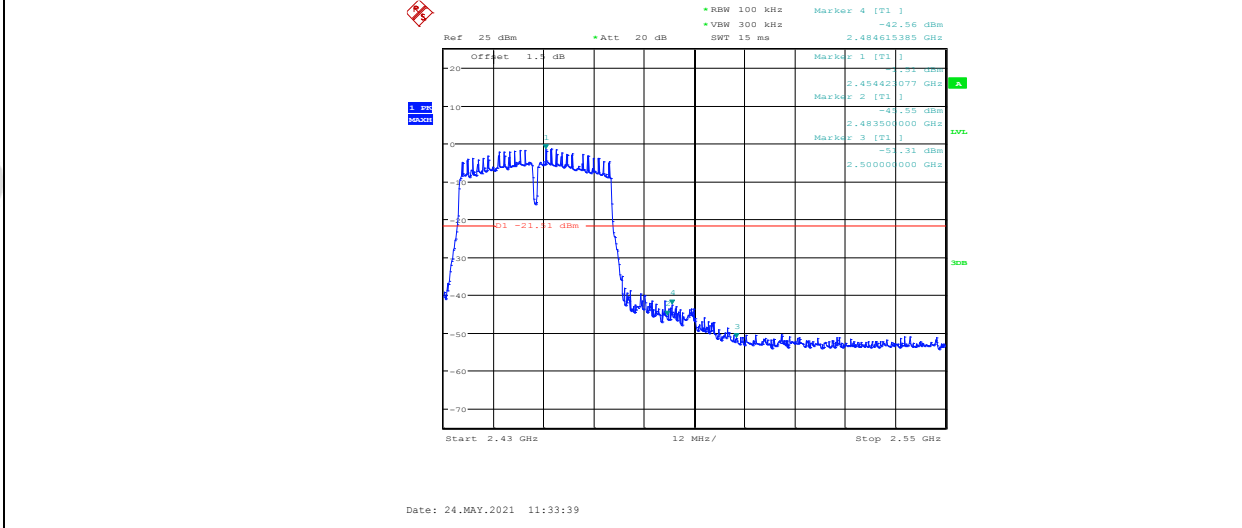


11N40MIMO_ANT2_High

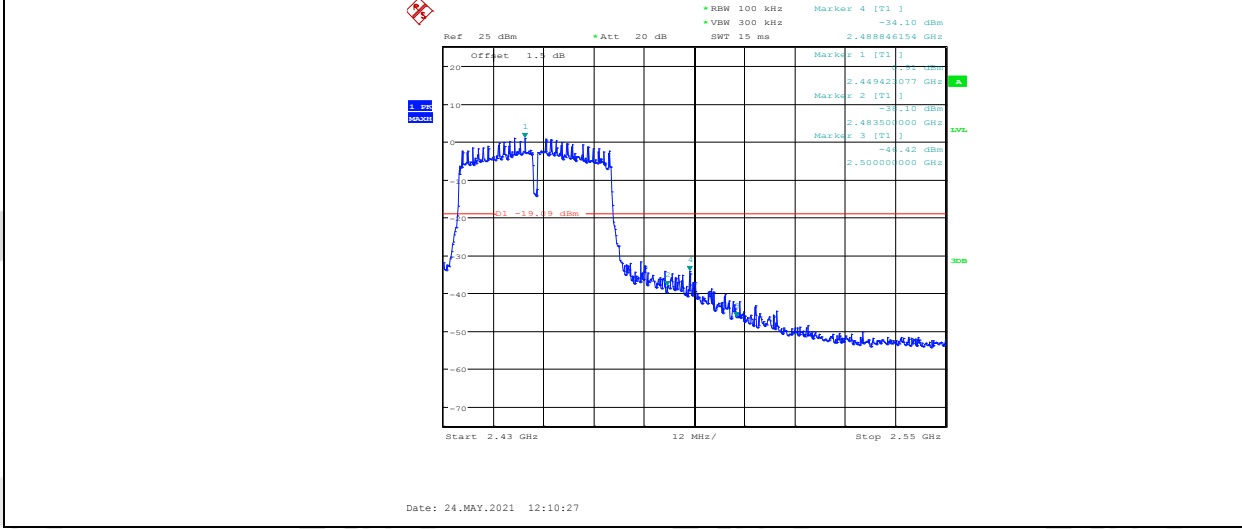

Spurious Emissions

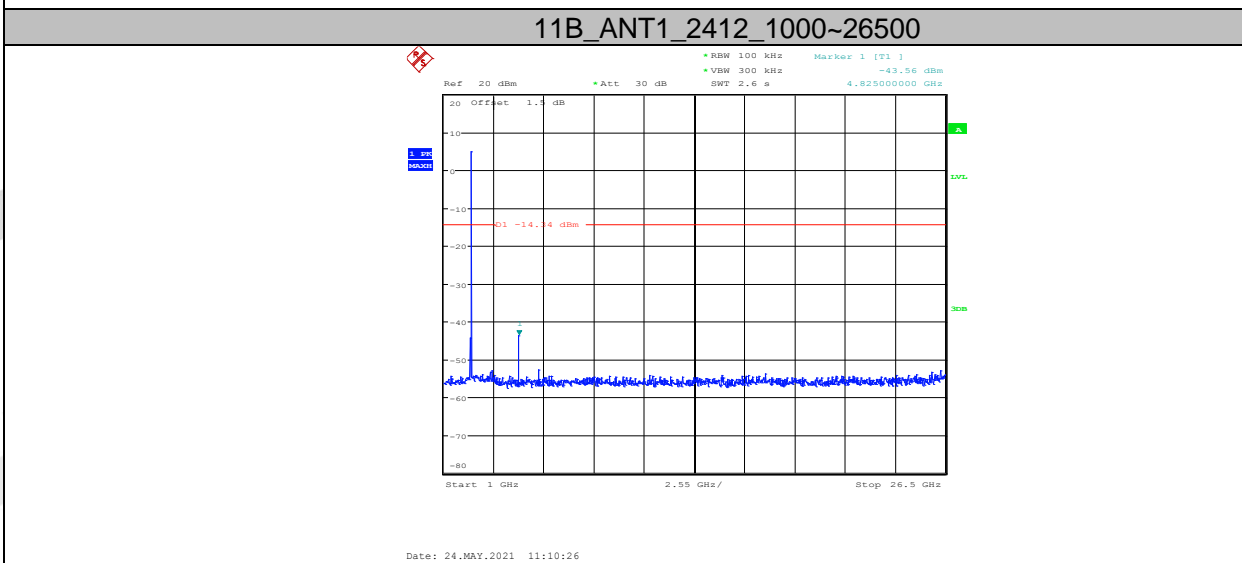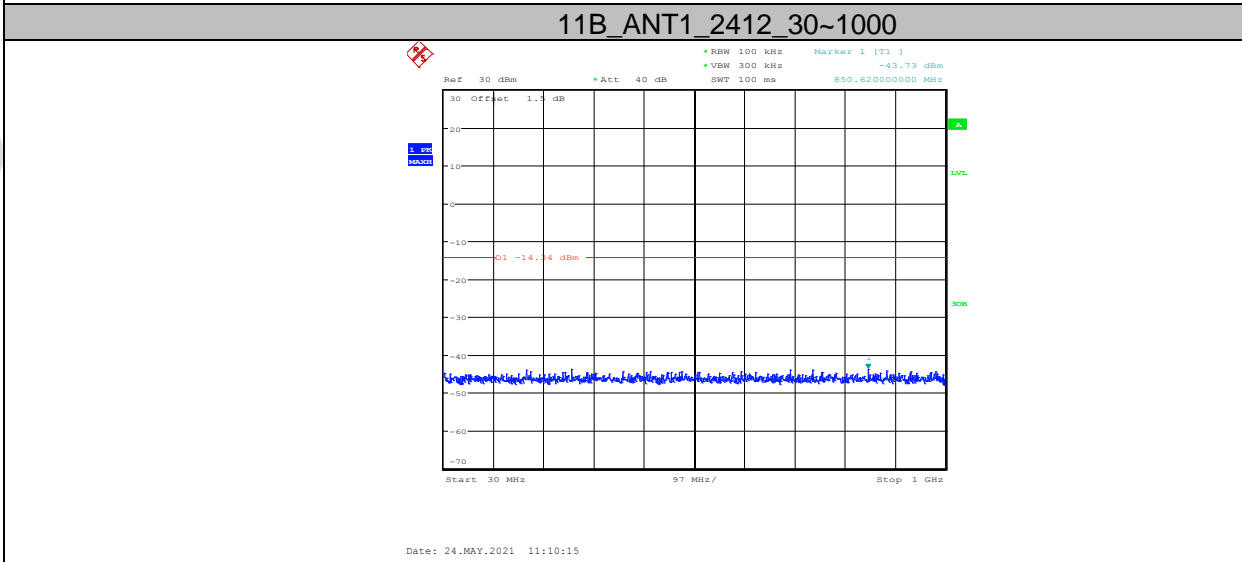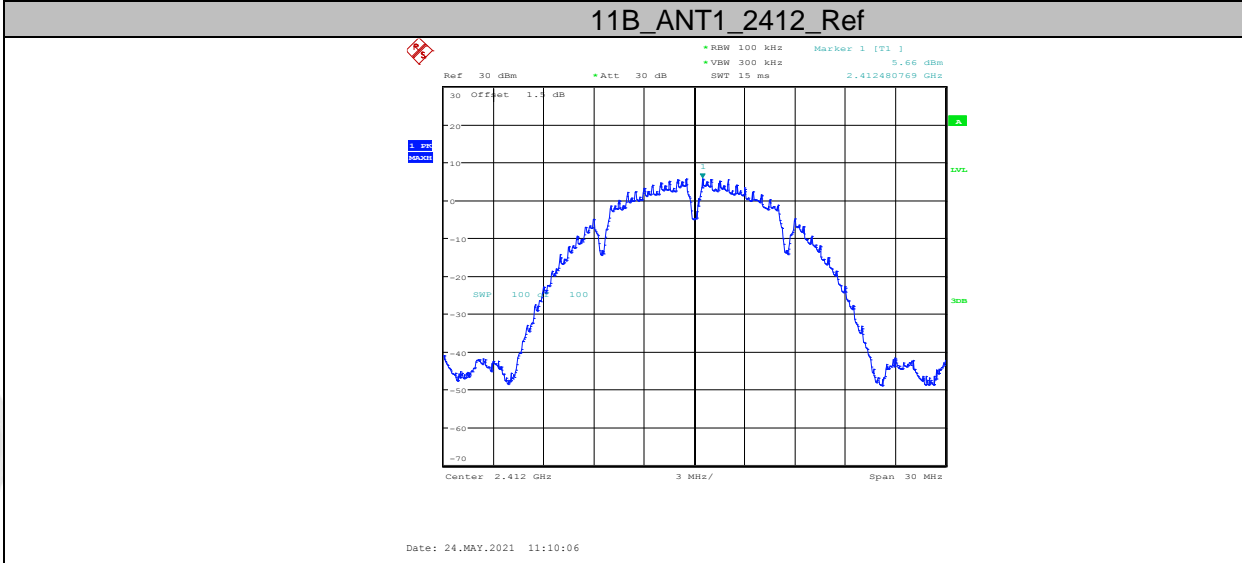


11B_ANT2_2412_Ref

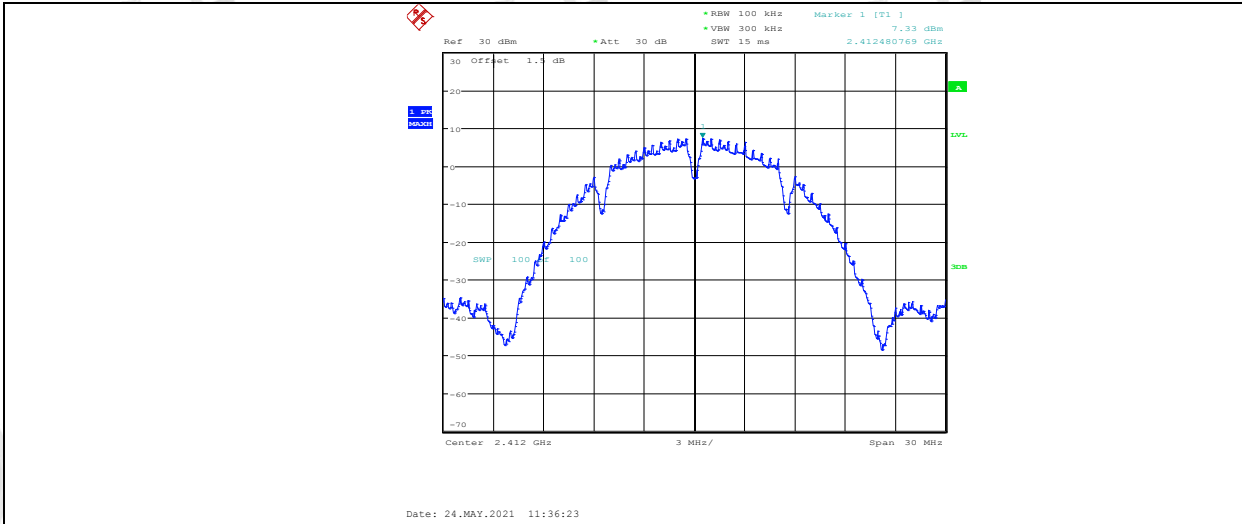


Date: 24.MAY.2021 11:36:23

11B_ANT2_2412_30~1000

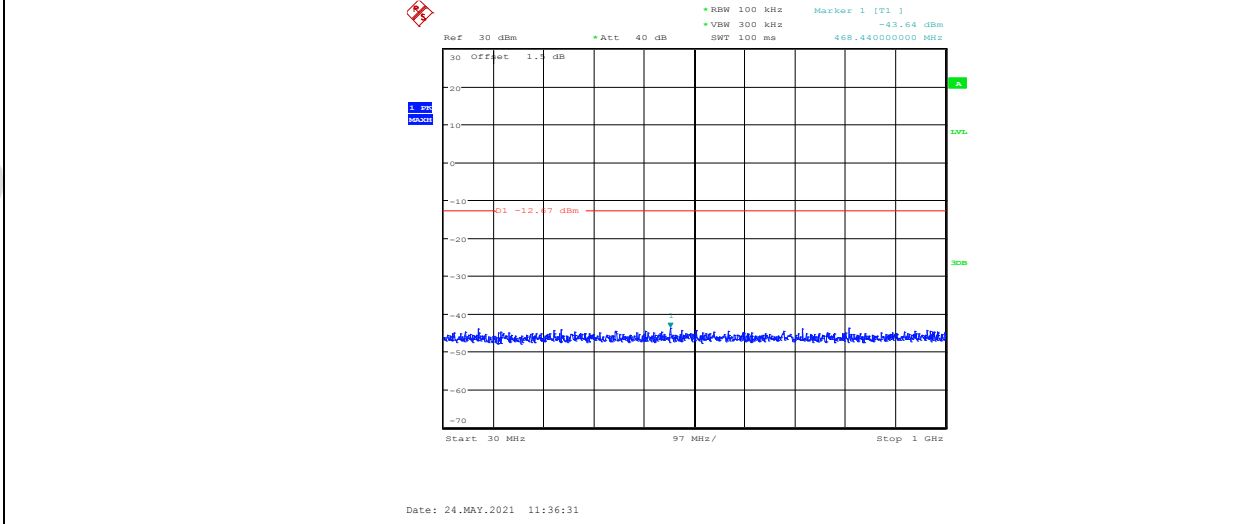


Date: 24.MAY.2021 11:36:31

11B_ANT2_2412_1000~26500

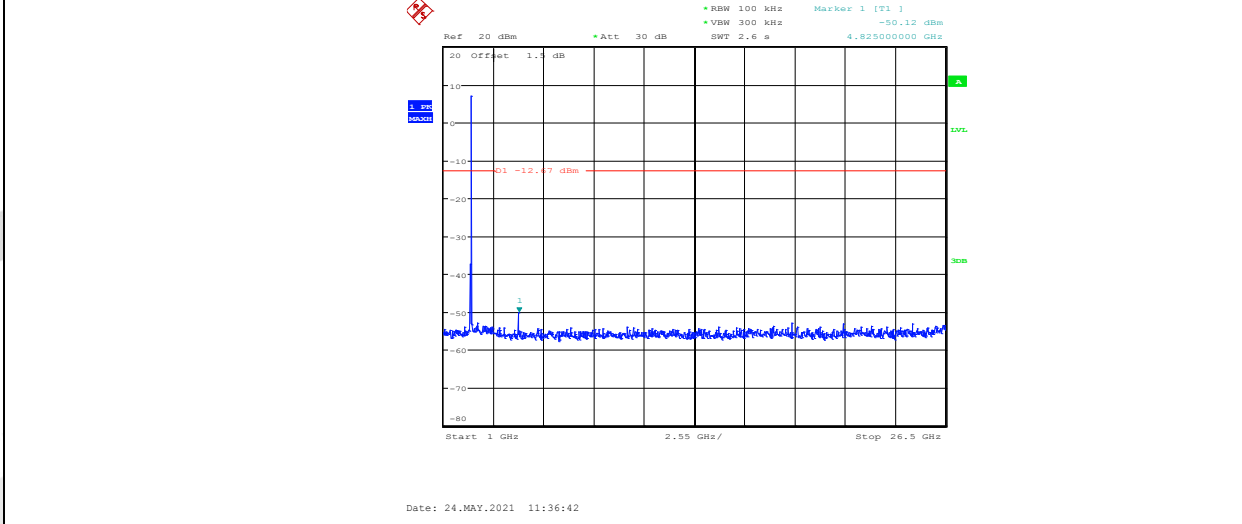


Date: 24.MAY.2021 11:36:42


11B_ANT1_2437_Ref

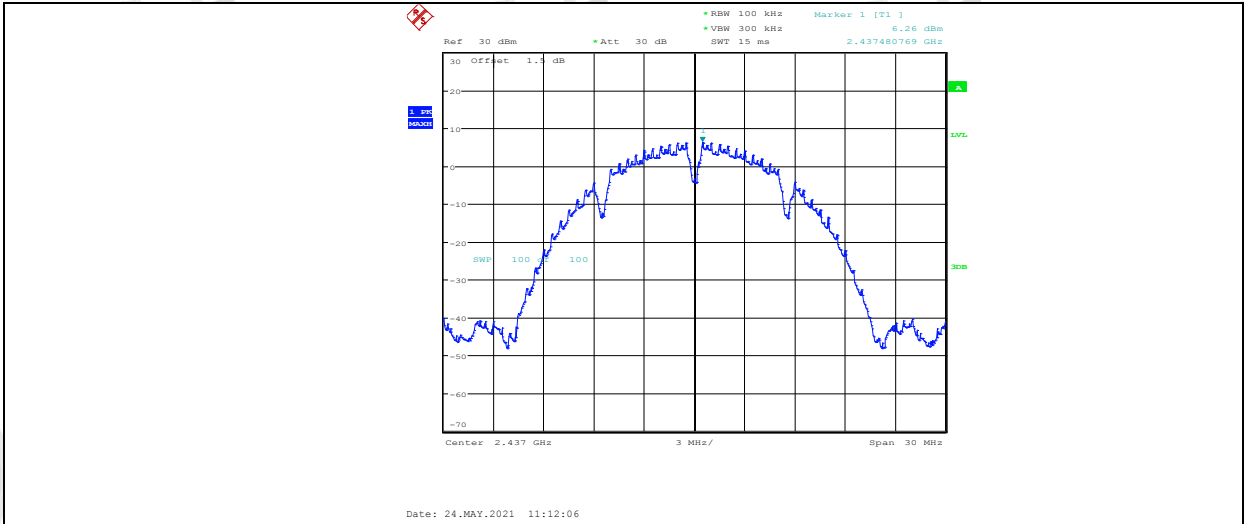


11B_ANT1_2437_30~1000

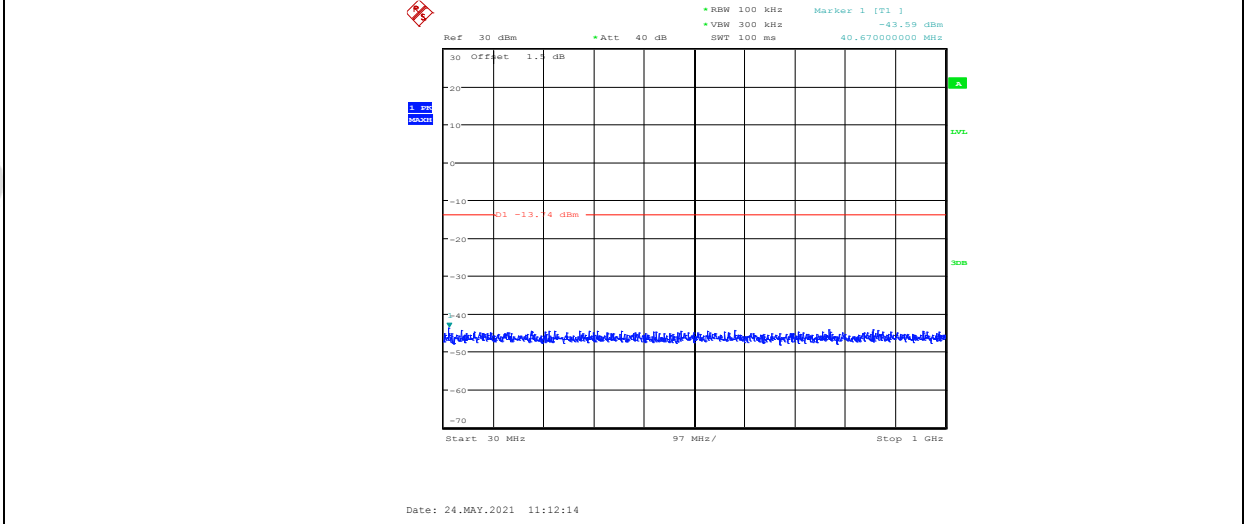


11B_ANT1_2437_1000~26500

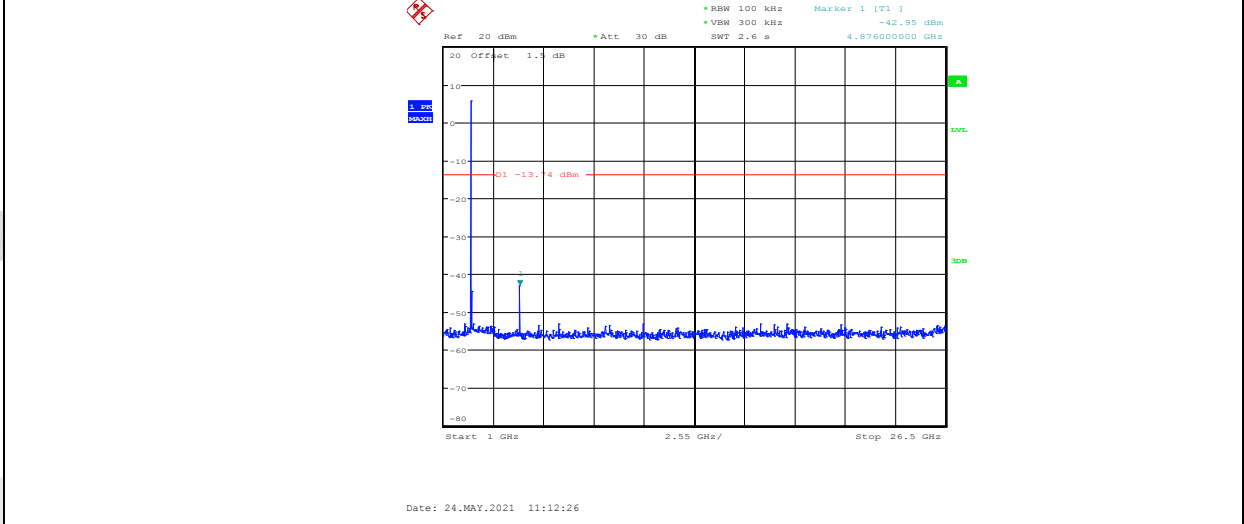


11B_ANT2_2437_Ref

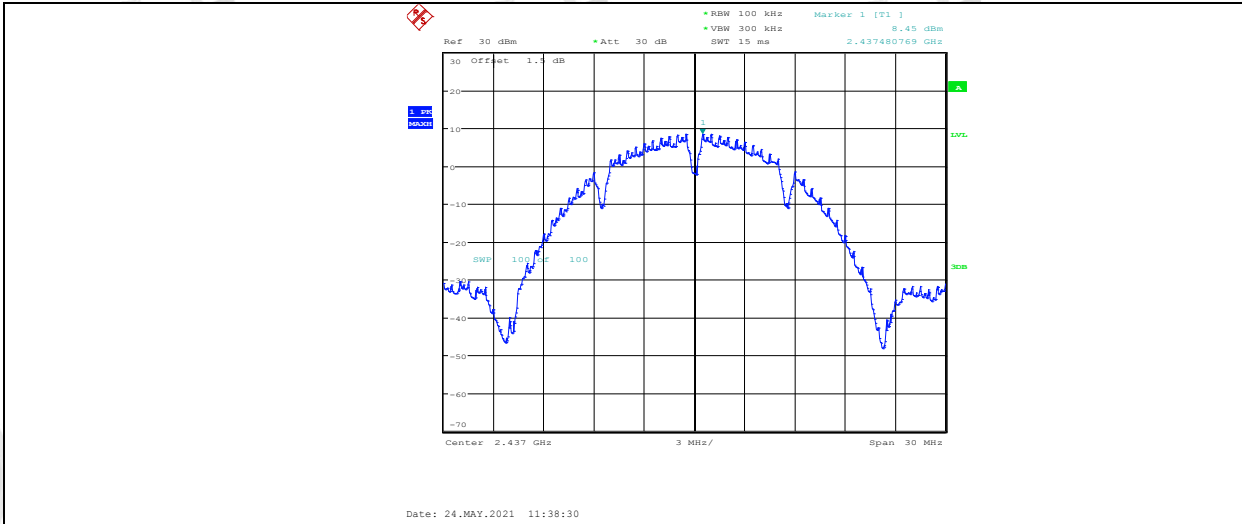


11B_ANT2_2437_30~1000

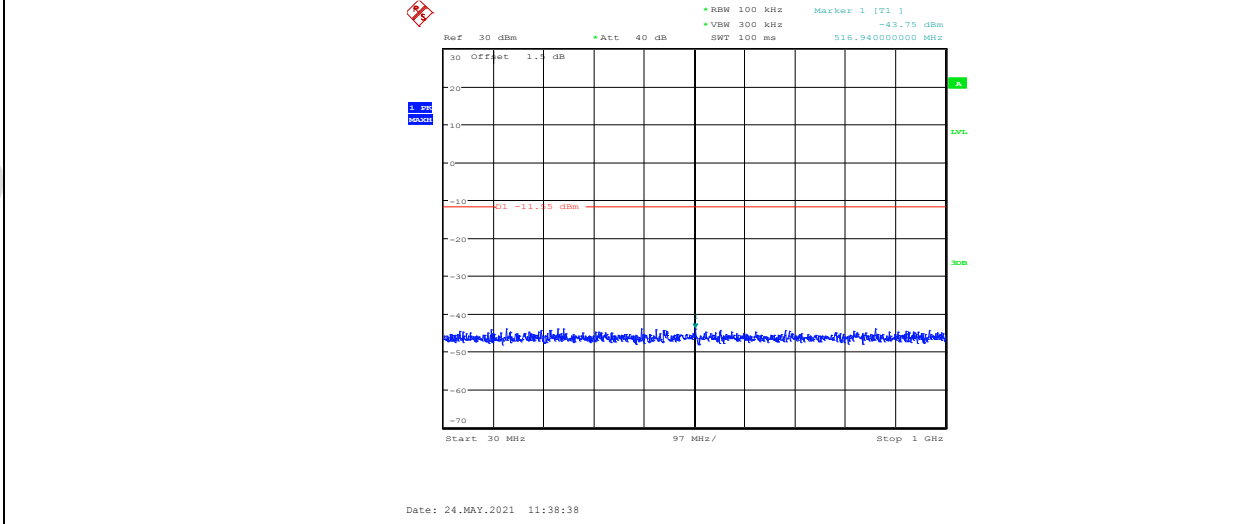


11B_ANT2_2437_1000~26500

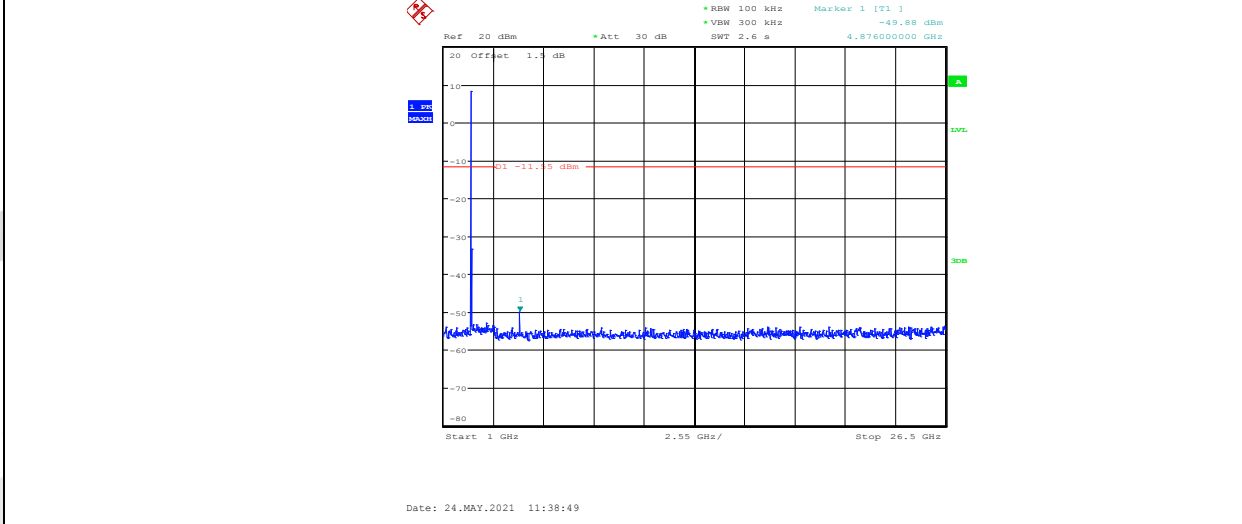


11B_ANT1_2462_Ref

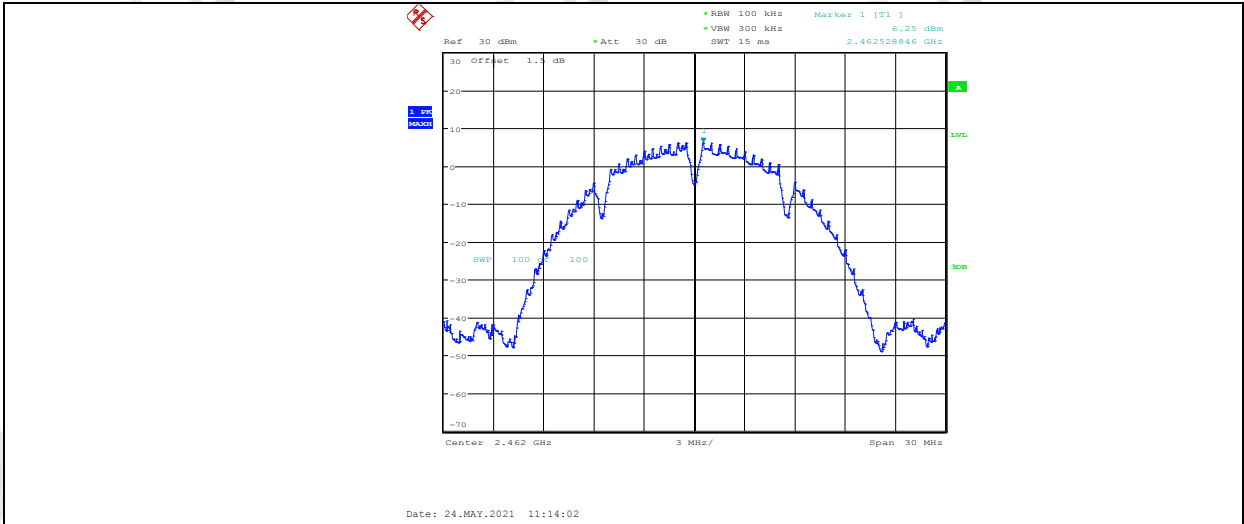


11B_ANT1_2462_30~1000

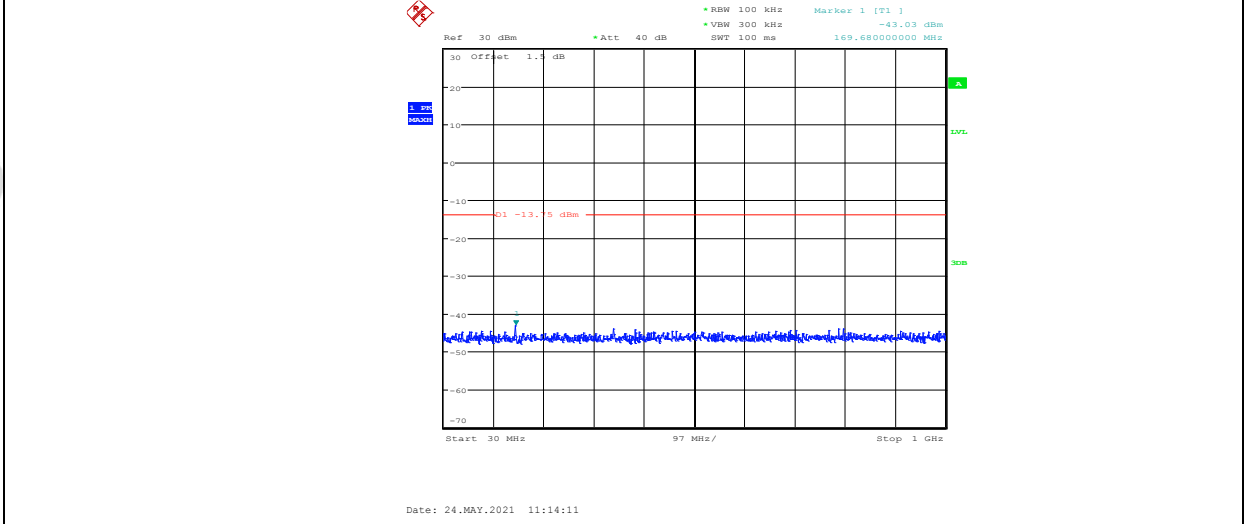


11B_ANT1_2462_1000~26500

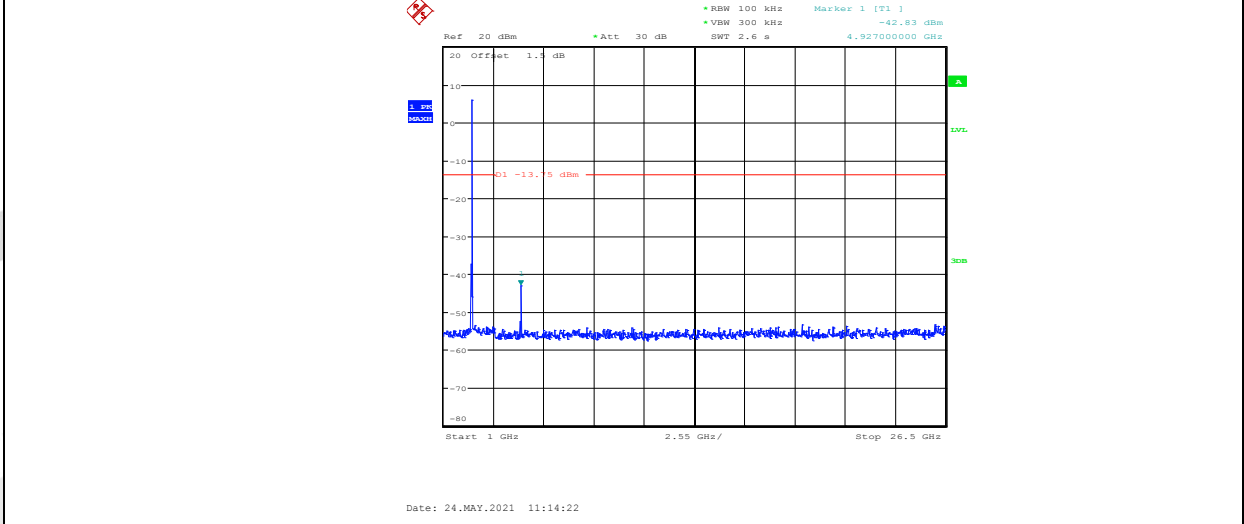


11B_ANT2_2462_Ref

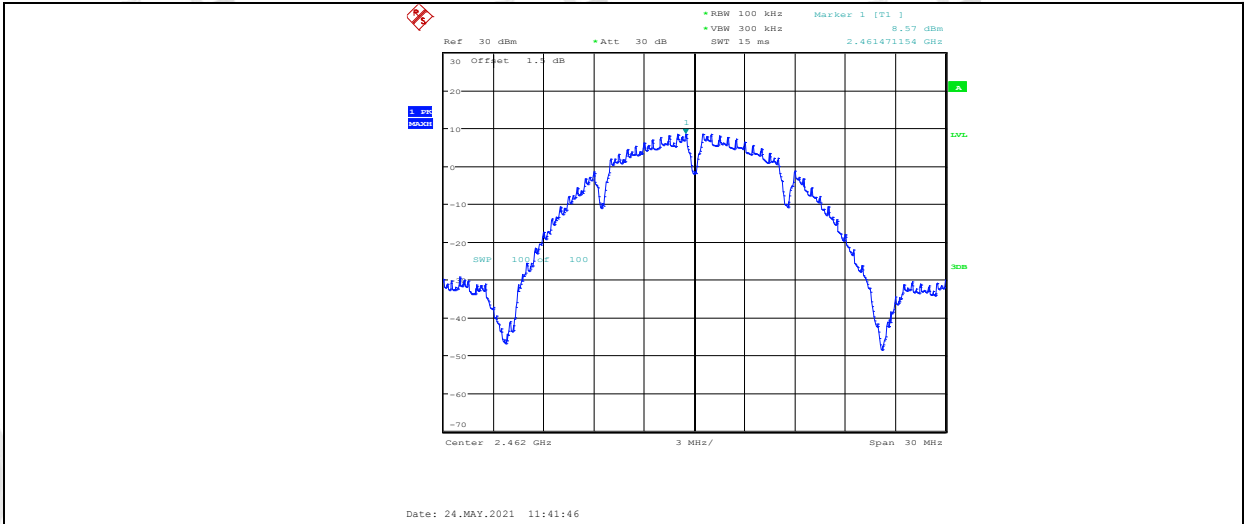


11B_ANT2_2462_30~1000

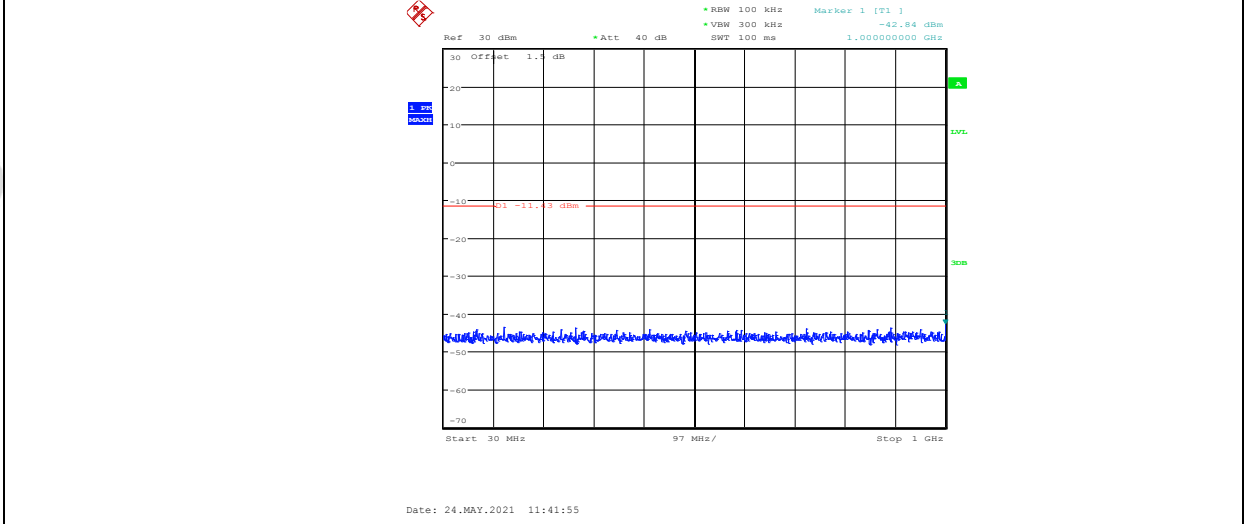


11B_ANT2_2462_1000~26500

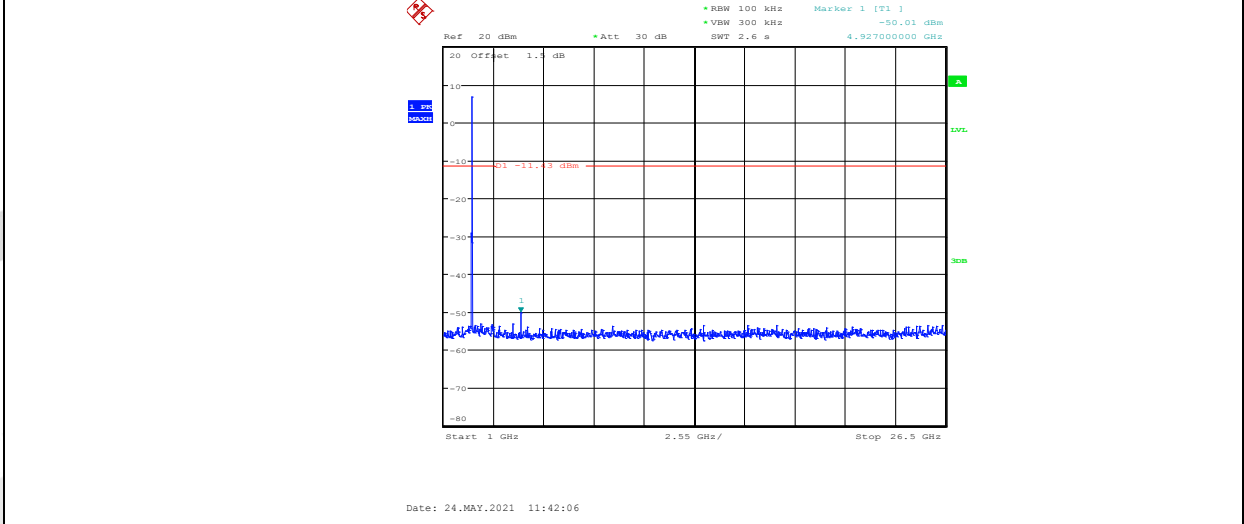


11G_ANT1_2412_Ref

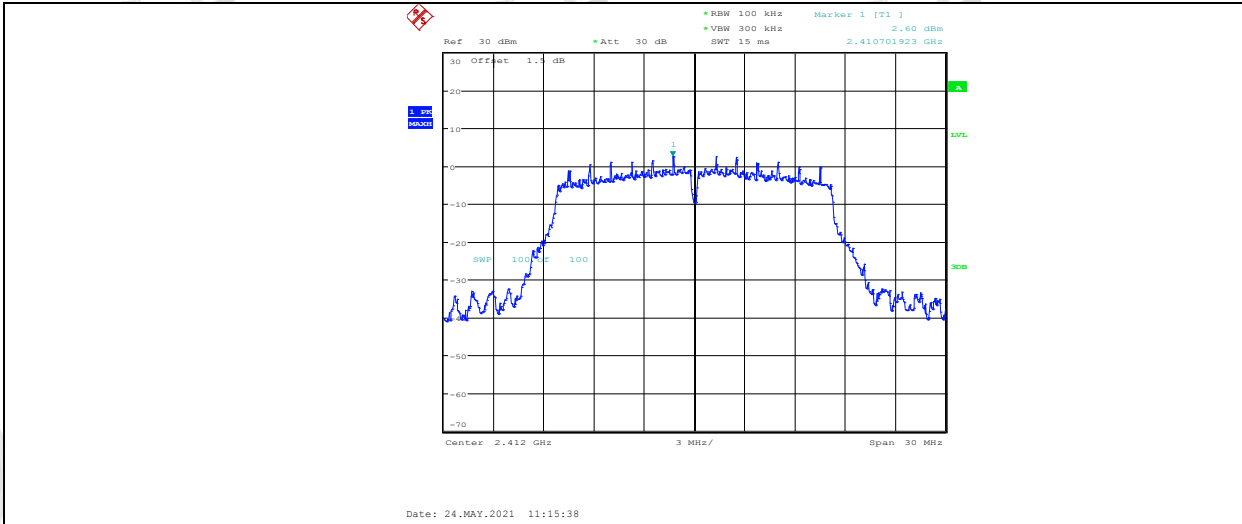


11G_ANT1_2412_30~1000

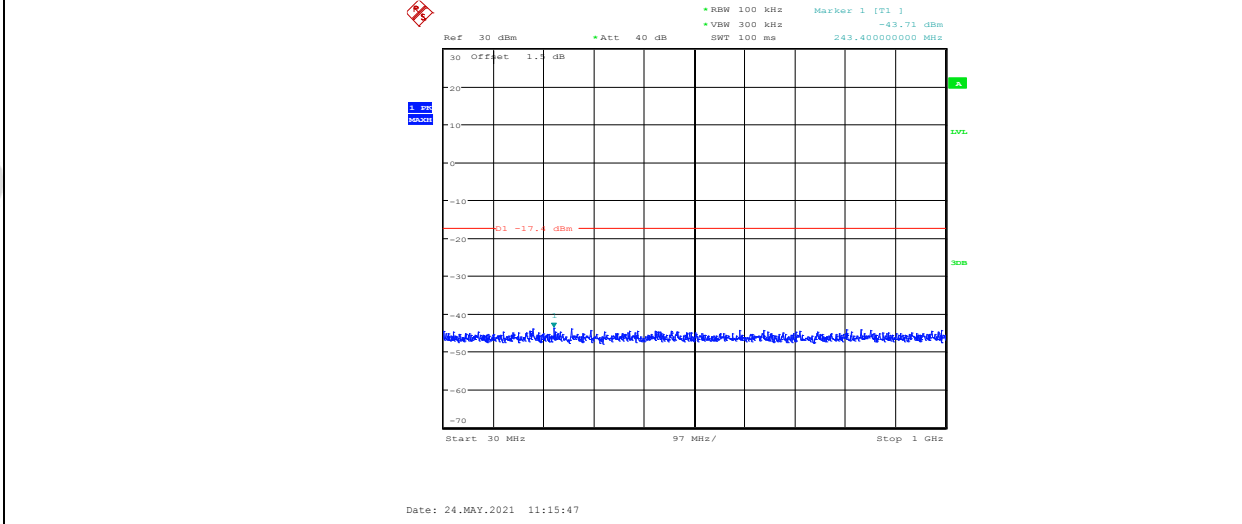

11G_ANT1_2412_1000~26500

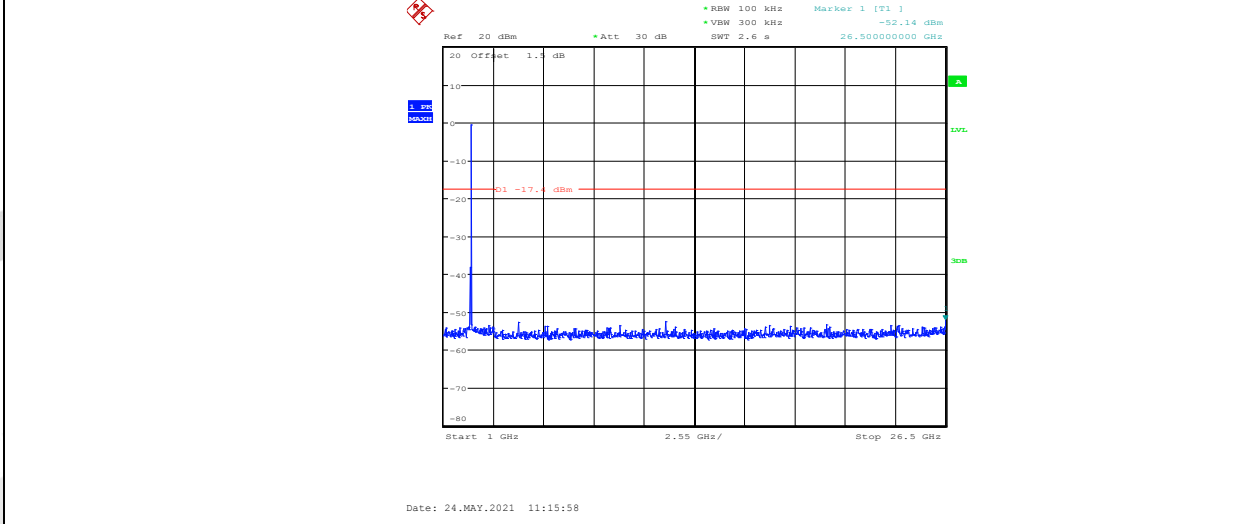


11G_ANT2_2412_Ref

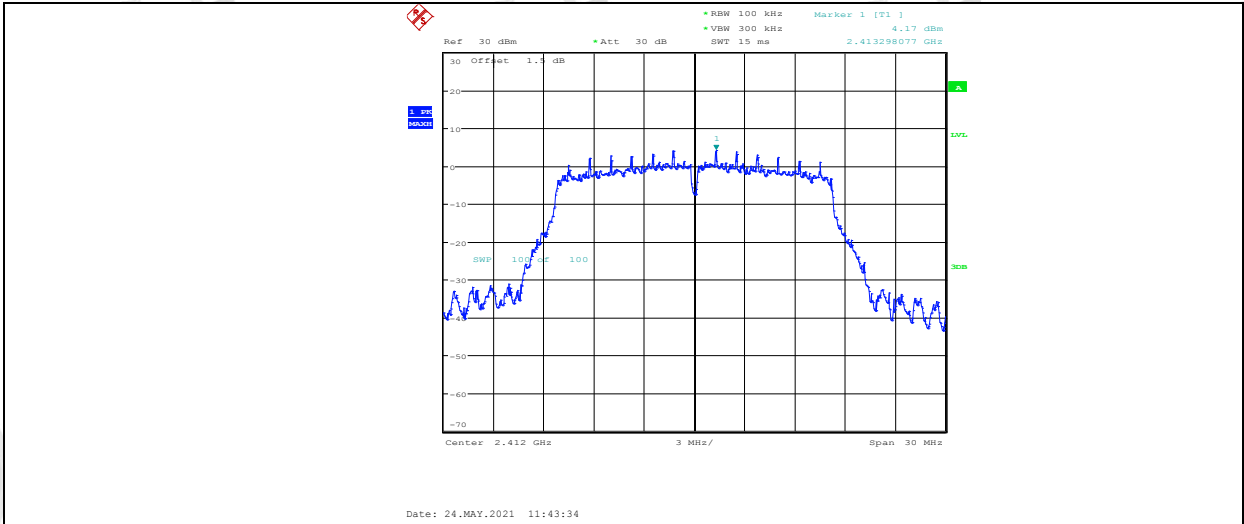


Date: 24.MAY.2021 11:43:34

11G_ANT2_2412_30~1000

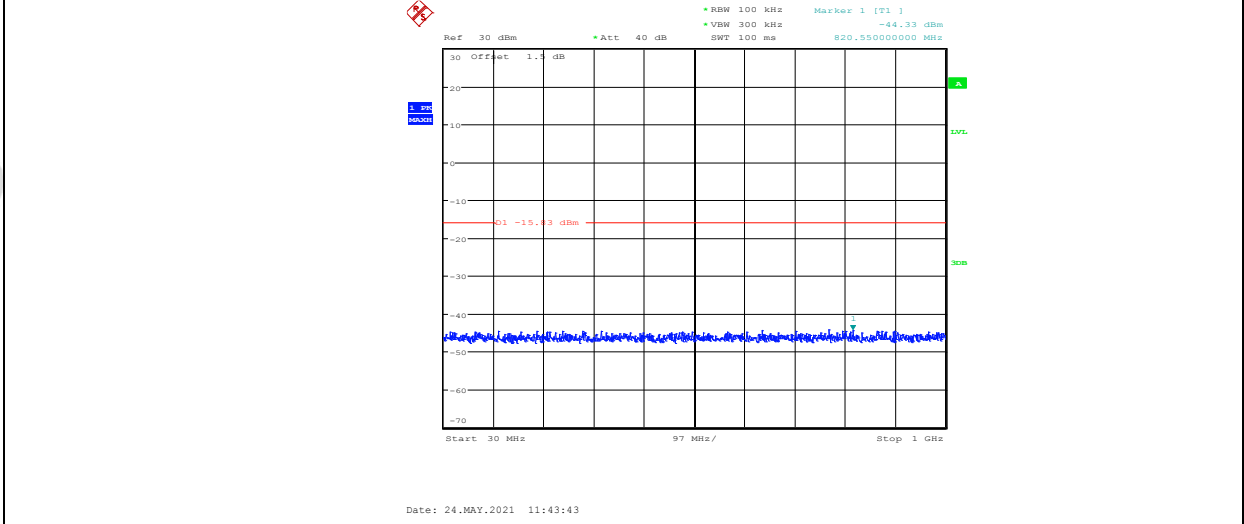


Date: 24.MAY.2021 11:43:43

11G_ANT2_2412_1000~26500

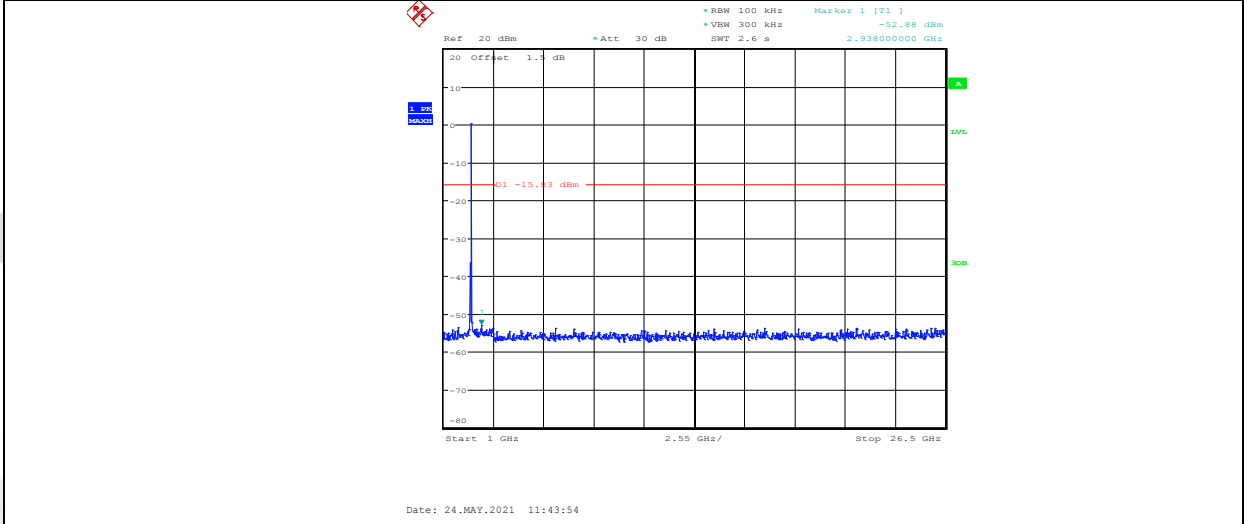


Date: 24.MAY.2021 11:43:54


11G_ANT1_2437_Ref

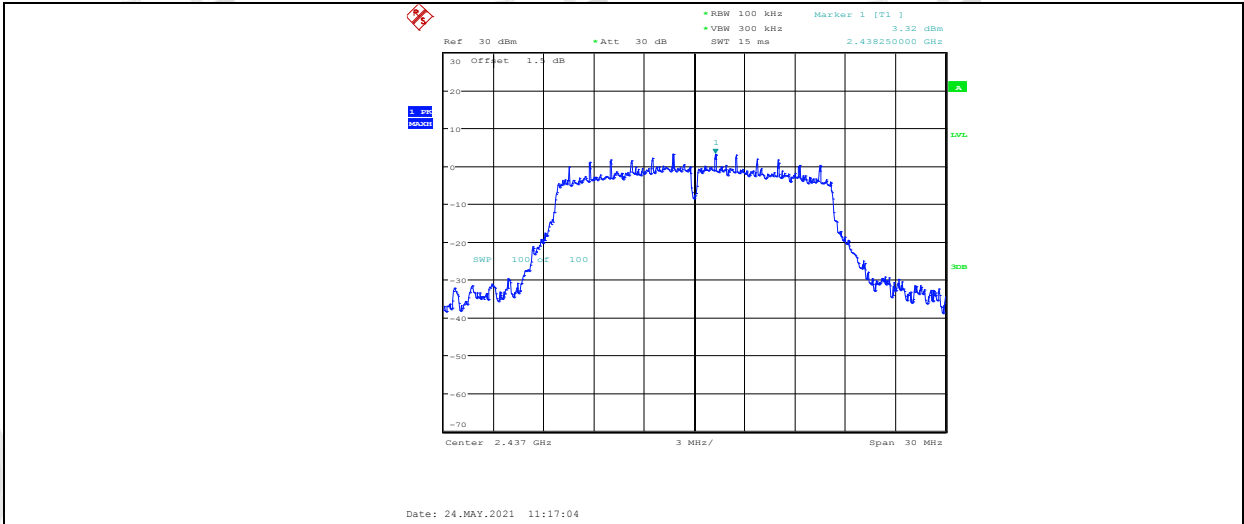


11G_ANT1_2437_30~1000

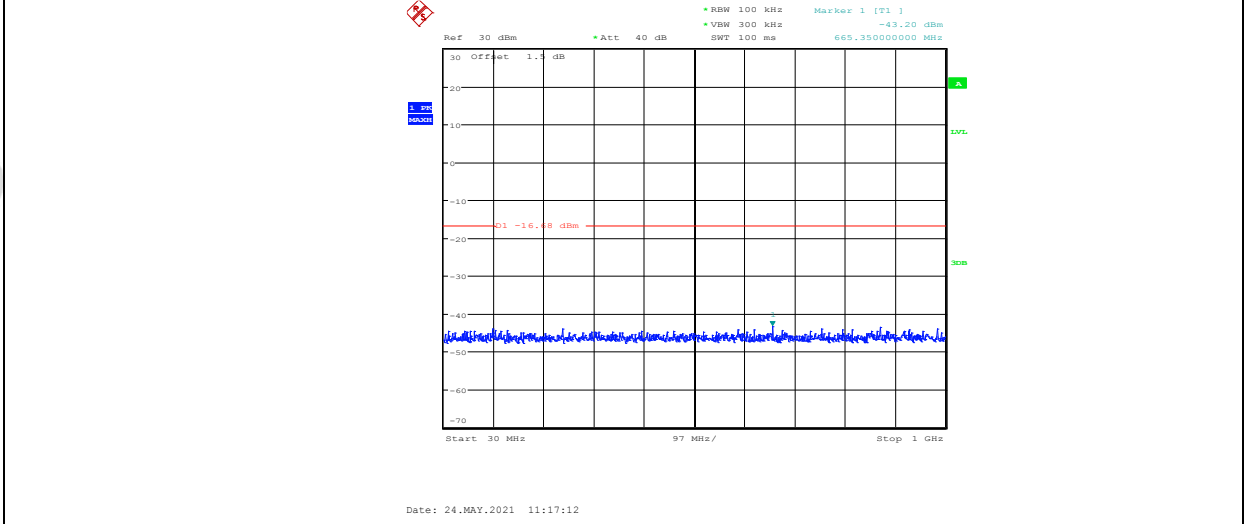


11G_ANT1_2437_1000~26500

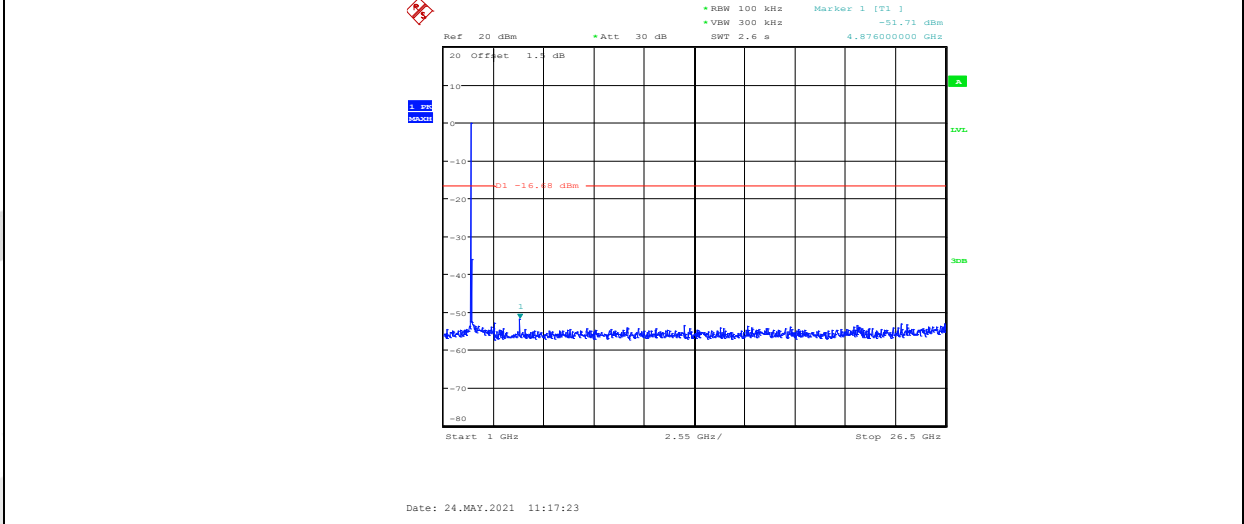


11G_ANT2_2437_Ref

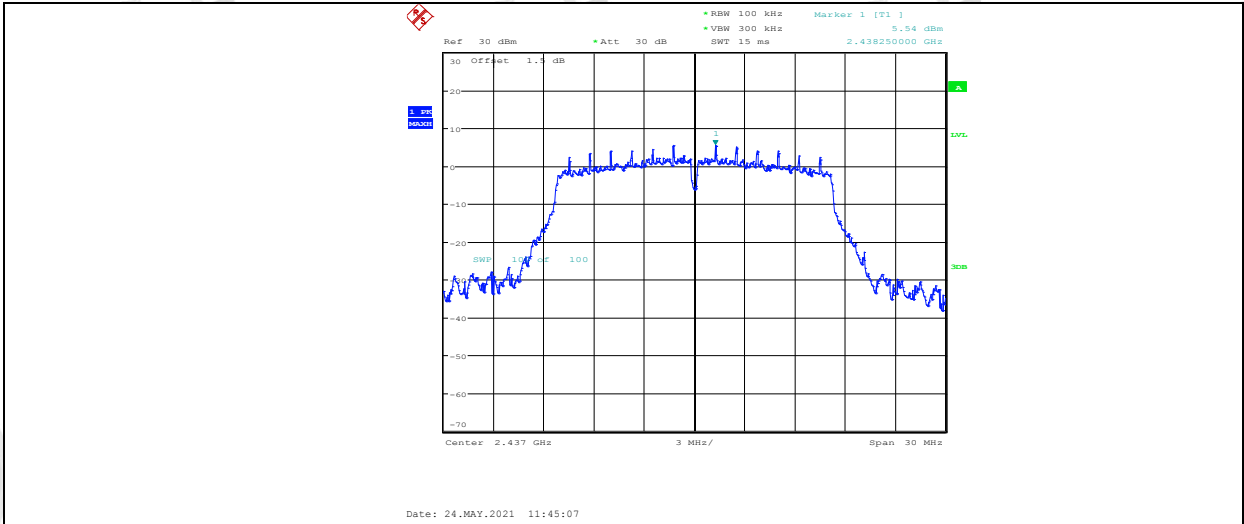


11G_ANT2_2437_30~1000

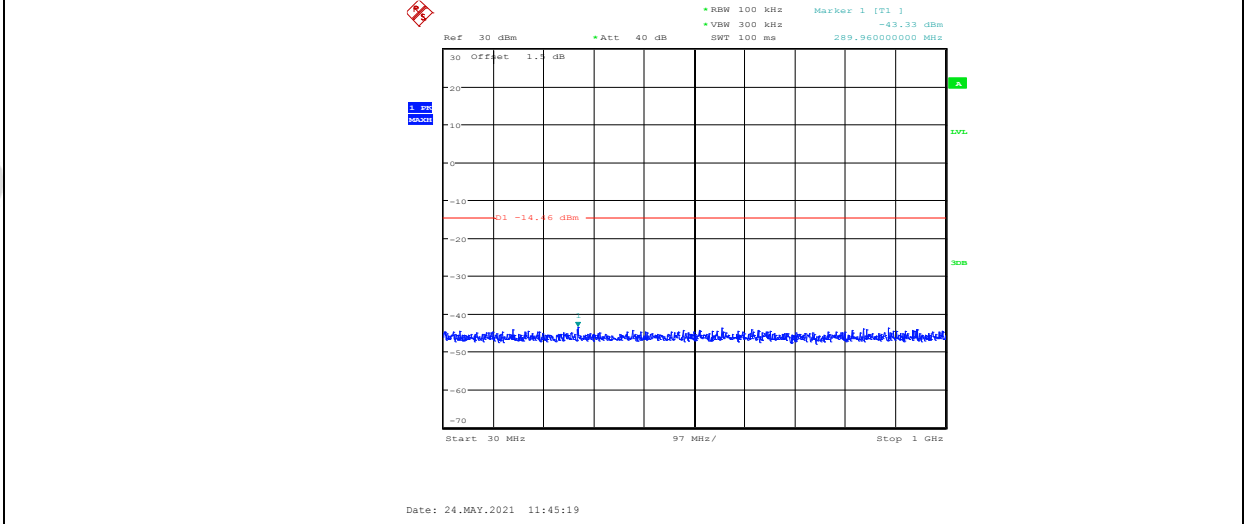


11G_ANT2_2437_1000~26500

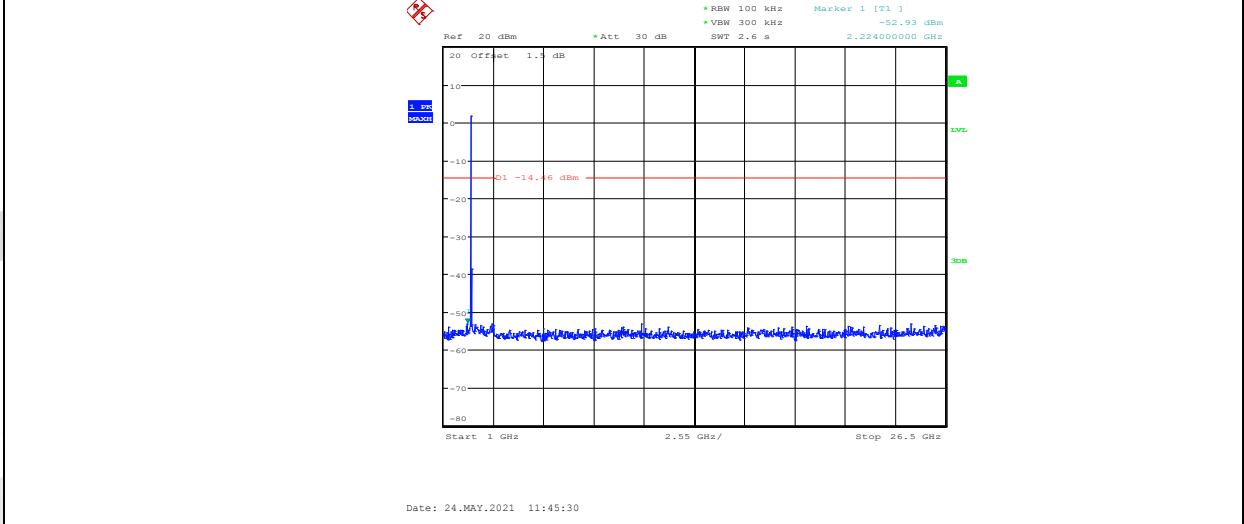


11G_ANT1_2462_Ref

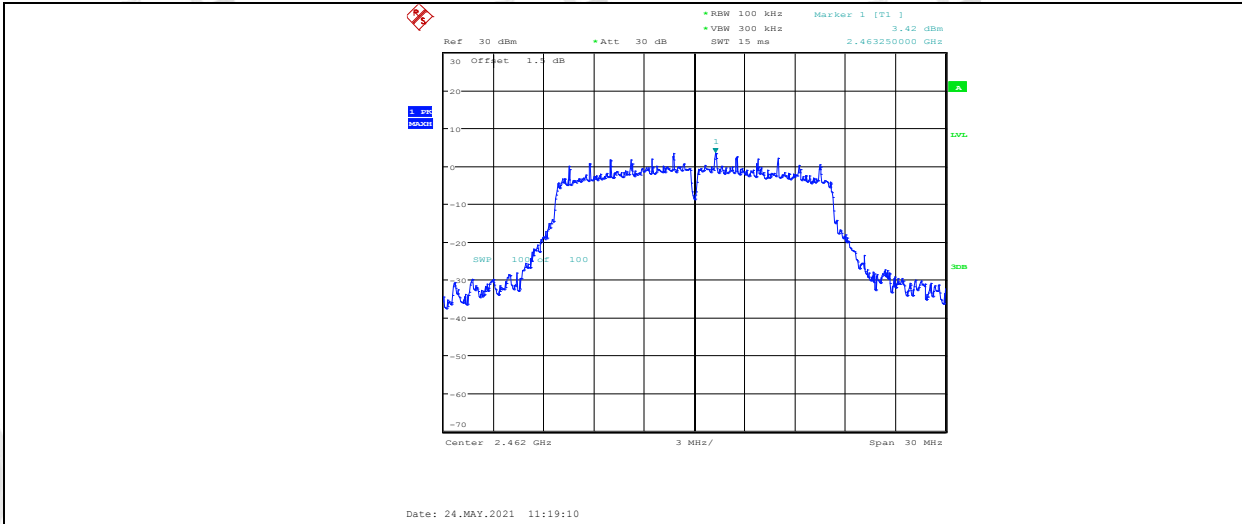


11G_ANT1_2462_30~1000

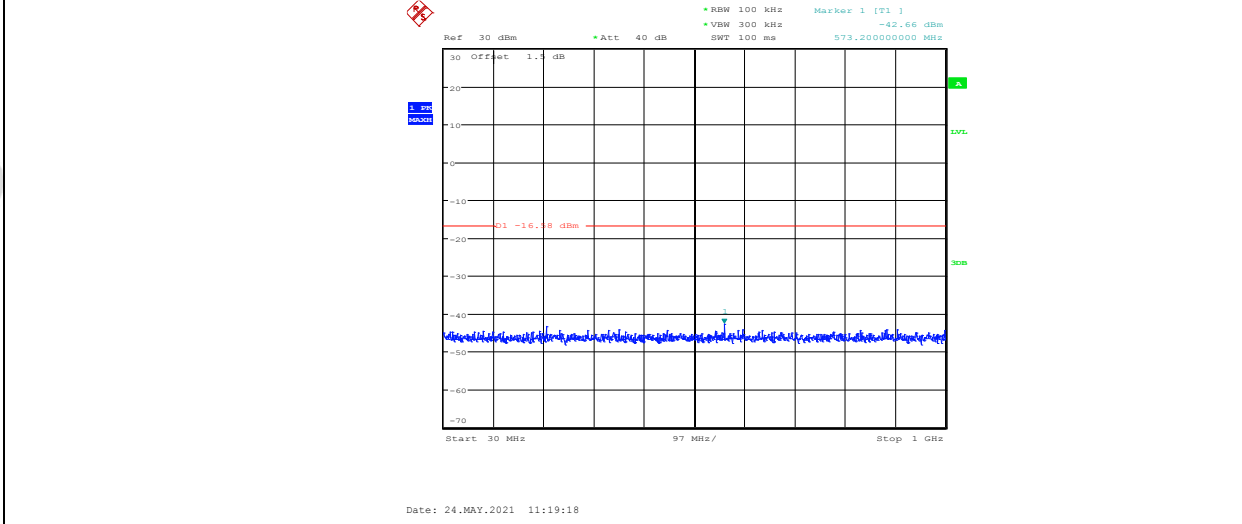


11G_ANT1_2462_1000~26500

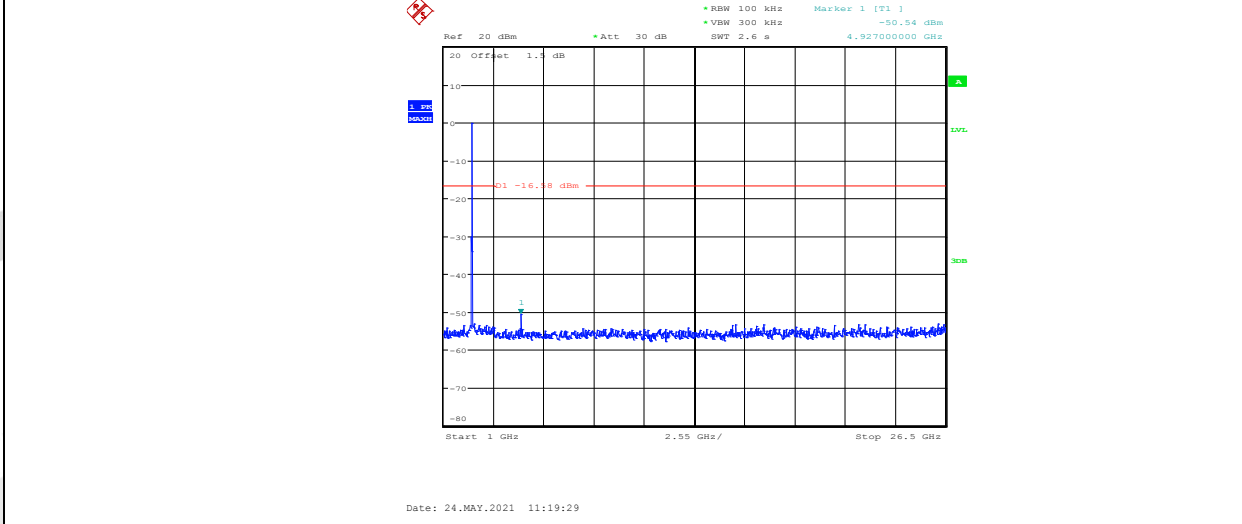


11G_ANT2_2462_Ref

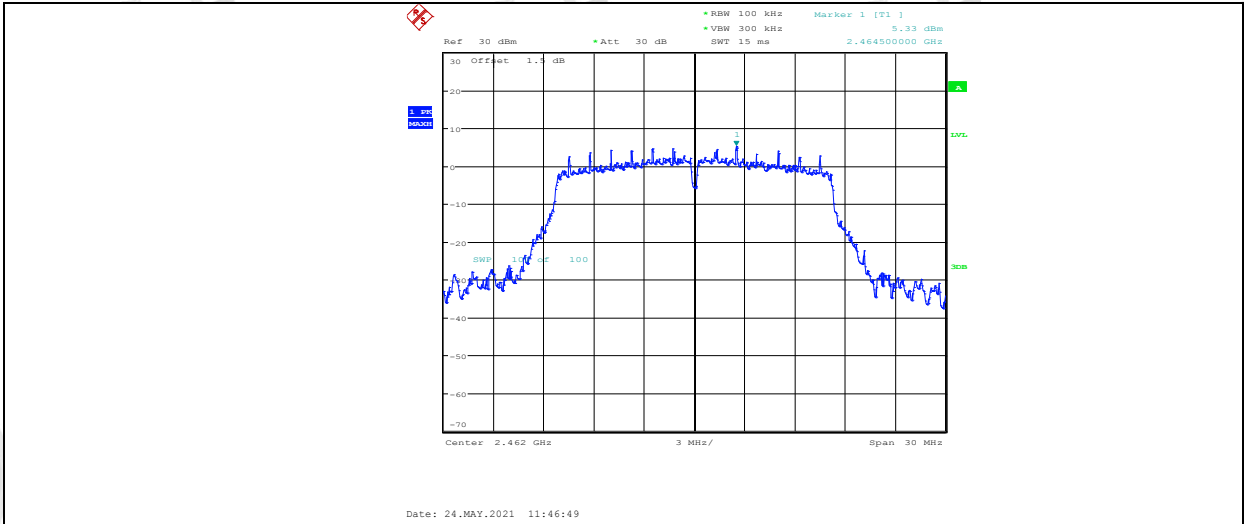


11G_ANT2_2462_30~1000

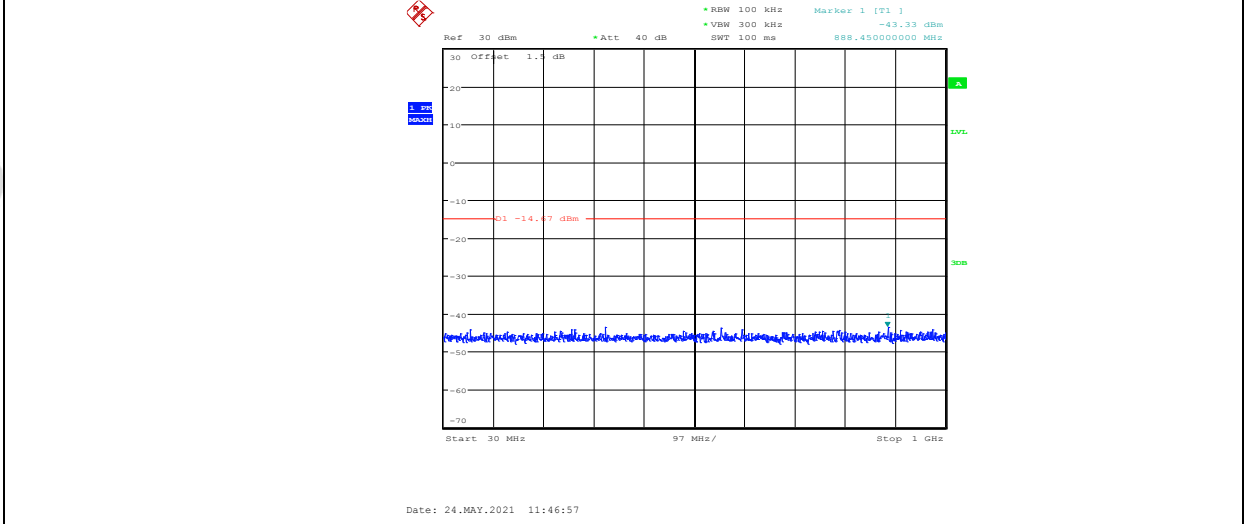


11G_ANT2_2462_1000~26500

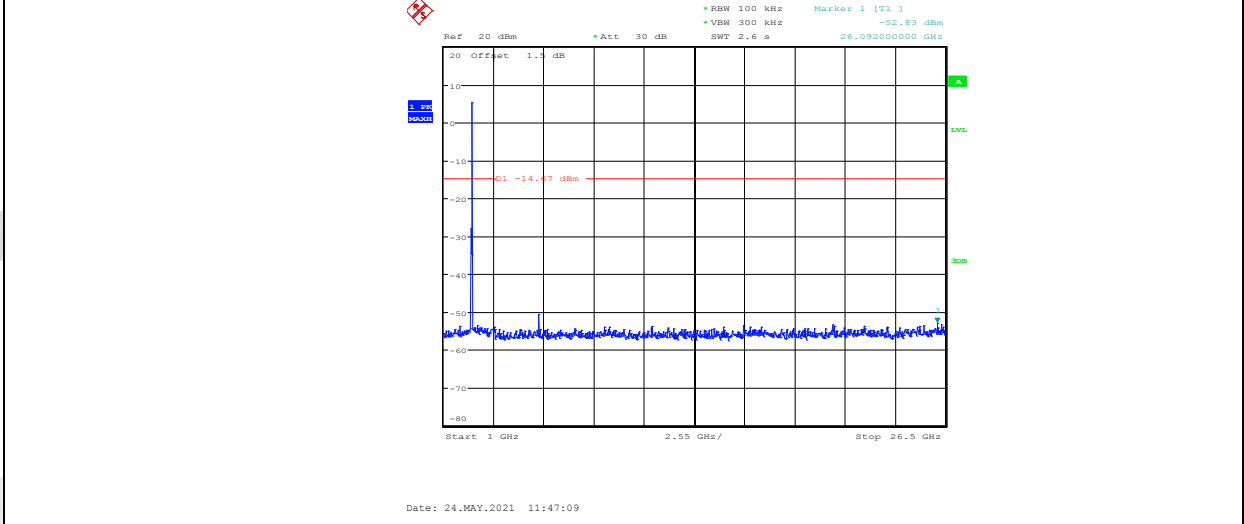


11N20MIMO_ANT1_2412_Ref

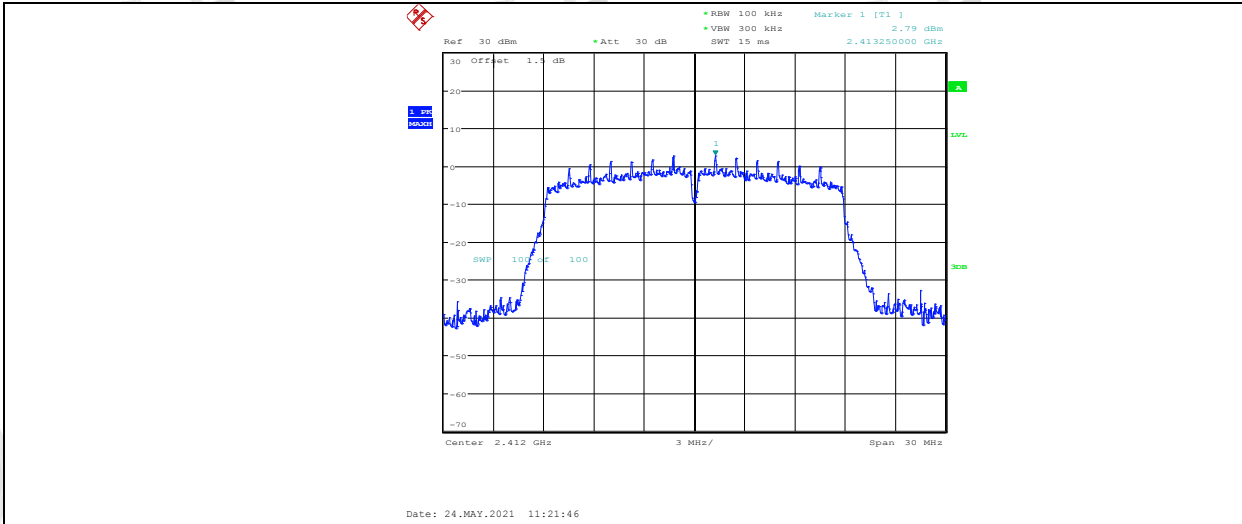


11N20MIMO_ANT1_2412_30~1000

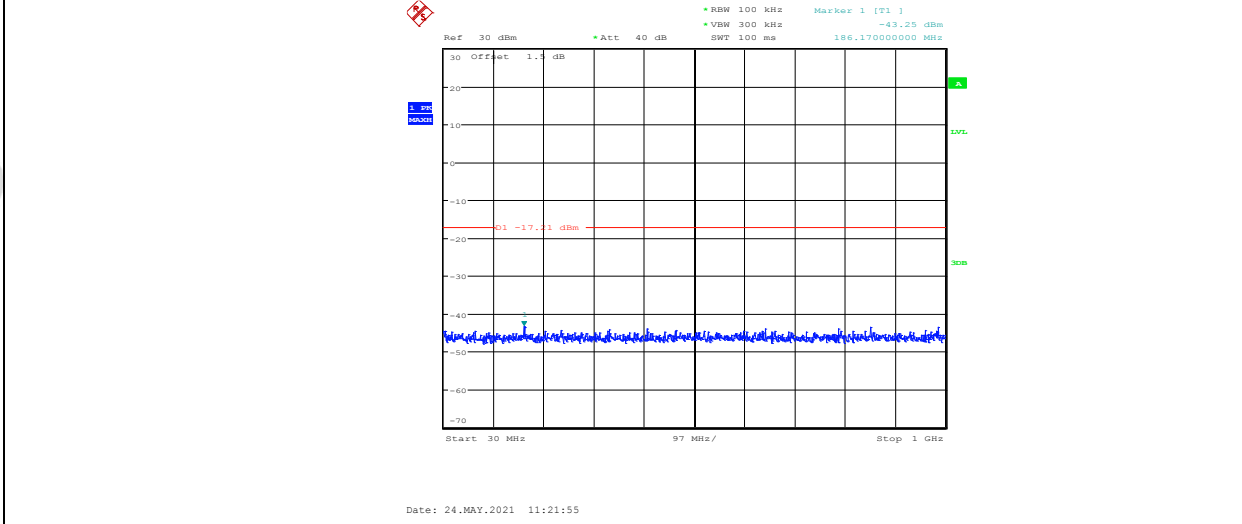


11N20MIMO_ANT1_2412_1000~26500

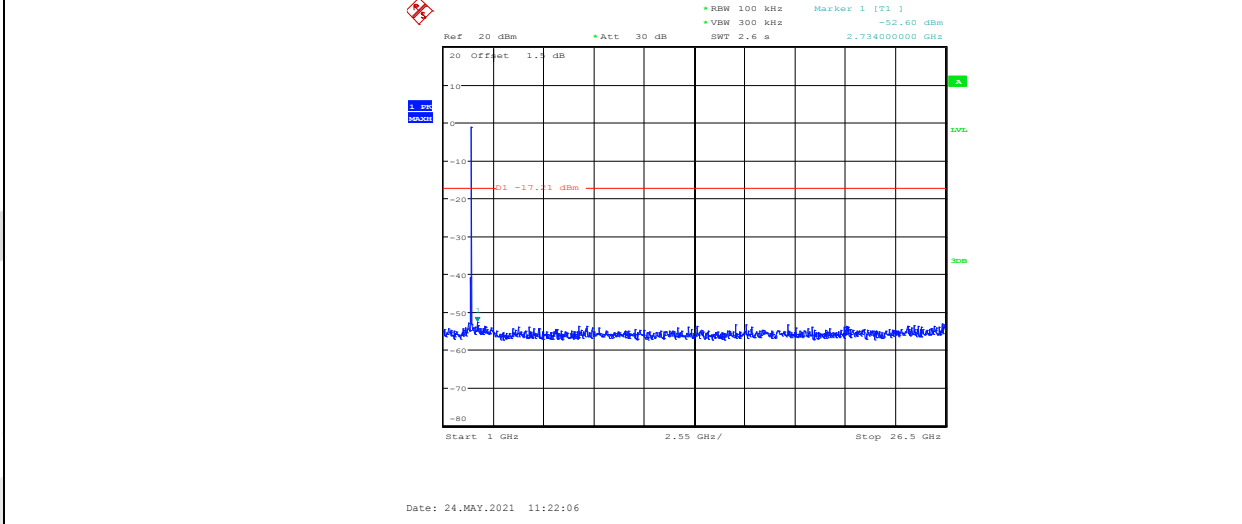


11N20MIMO_ANT2_2412_Ref

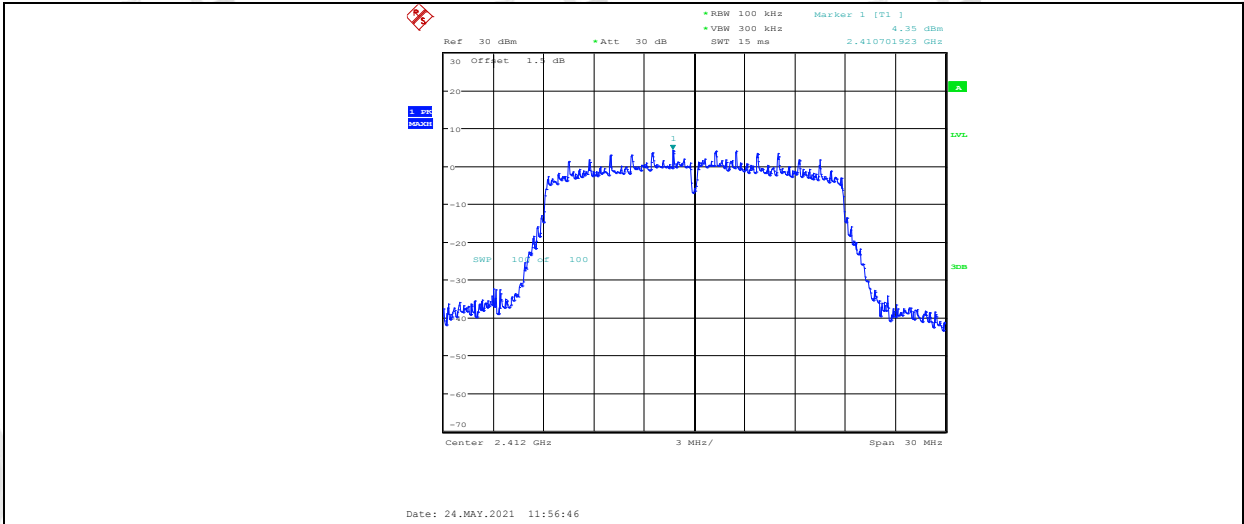


11N20MIMO_ANT2_2412_30~1000

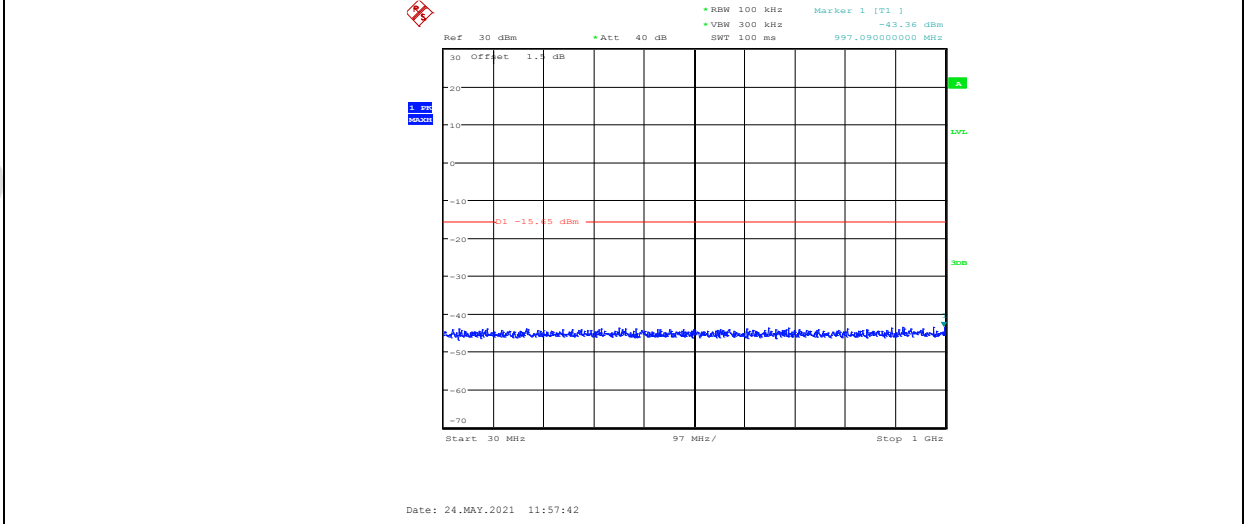


11N20MIMO_ANT2_2412_1000~26500

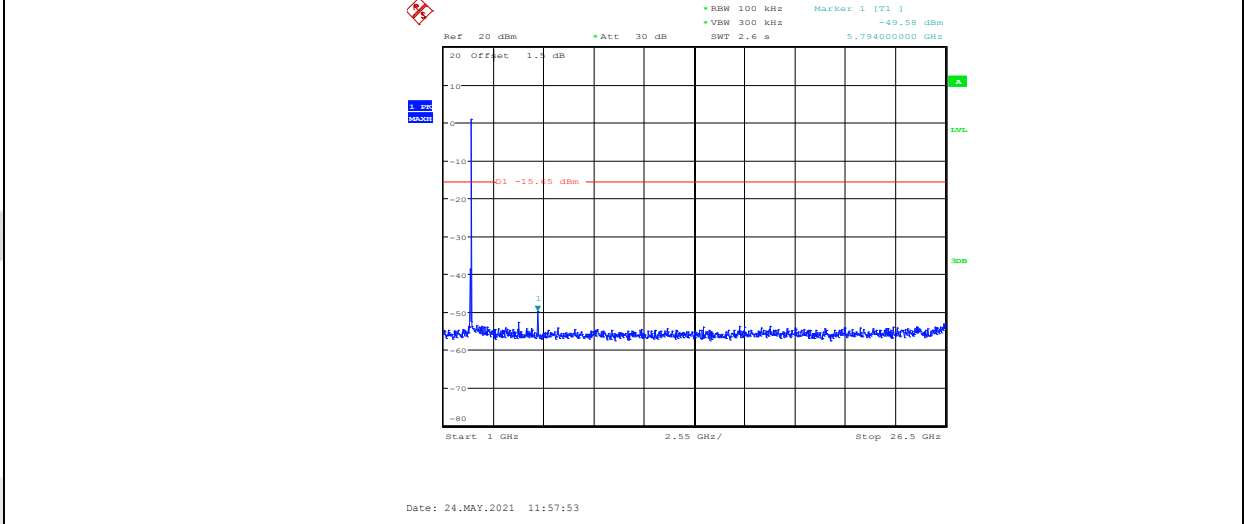


11N20MIMO_ANT1_2437_Ref

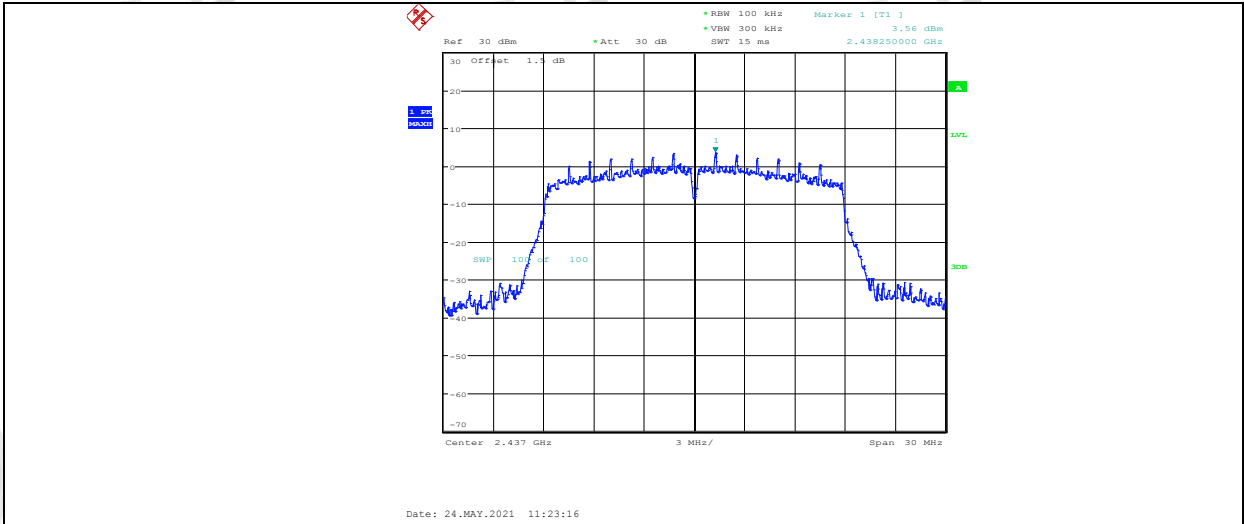


11N20MIMO_ANT1_2437_30~1000

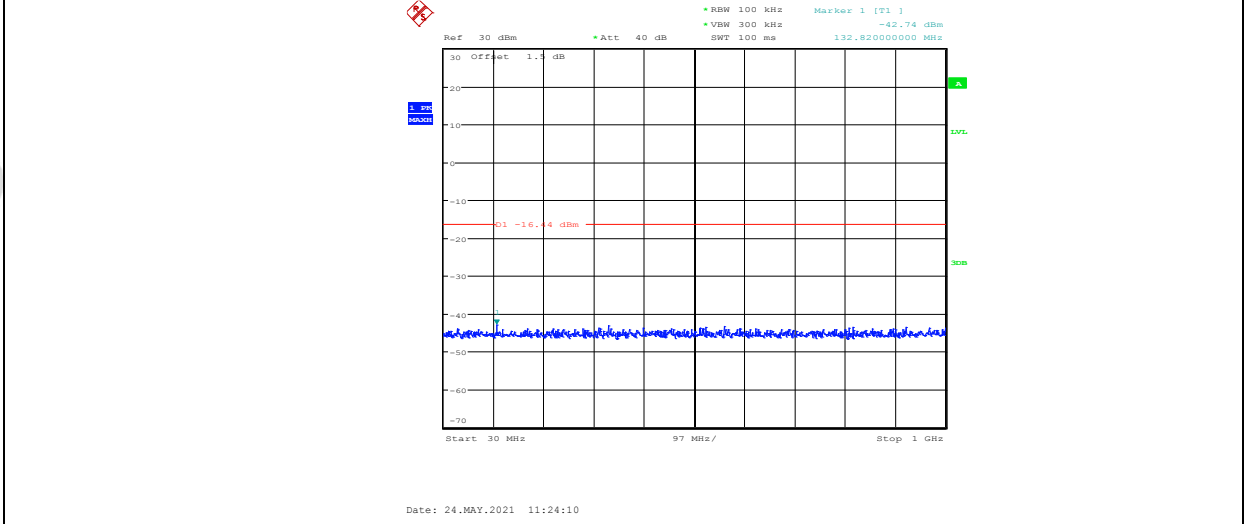


11N20MIMO_ANT1_2437_1000~26500

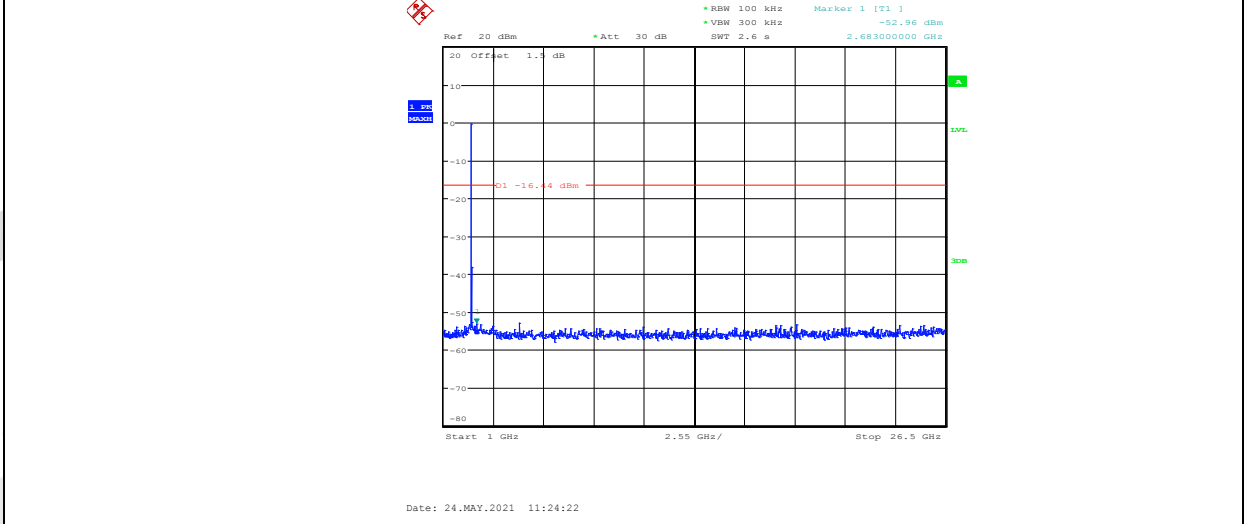


11N20MIMO_ANT2_2437_Ref

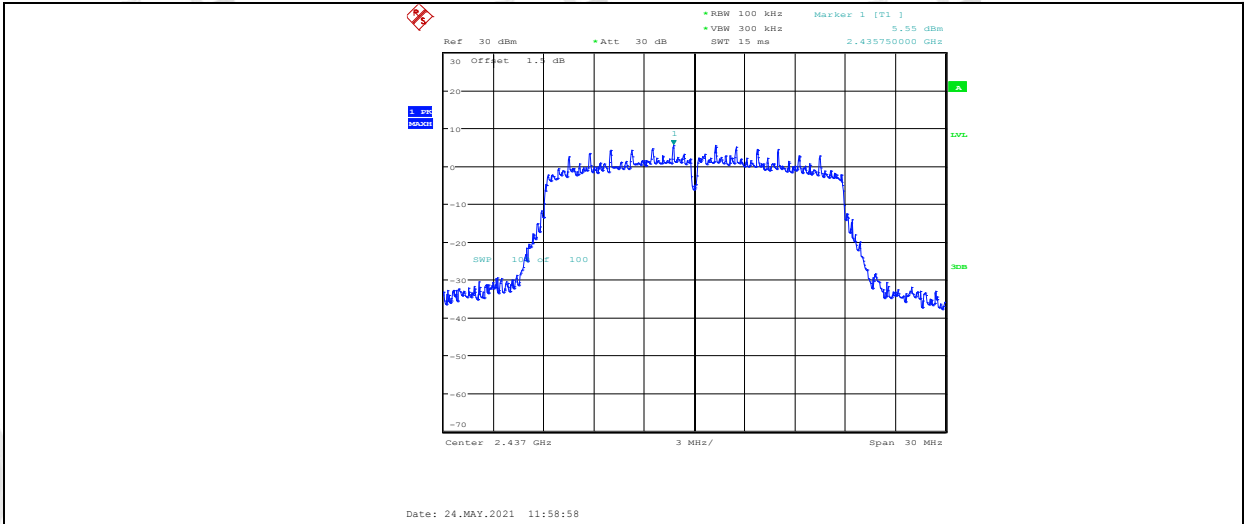


11N20MIMO_ANT2_2437_30~1000

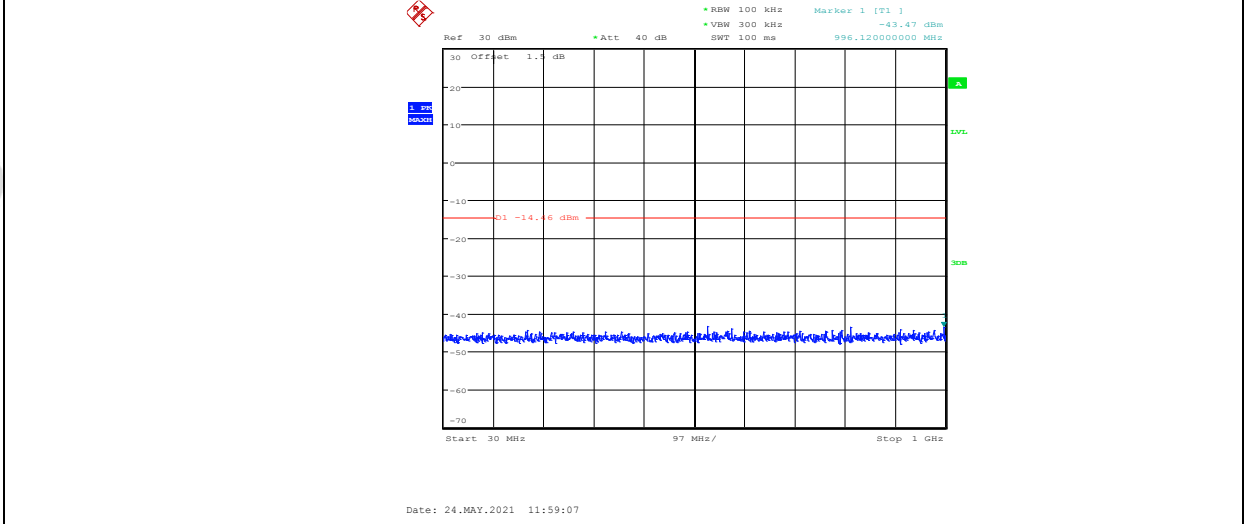


11N20MIMO_ANT2_2437_1000~26500

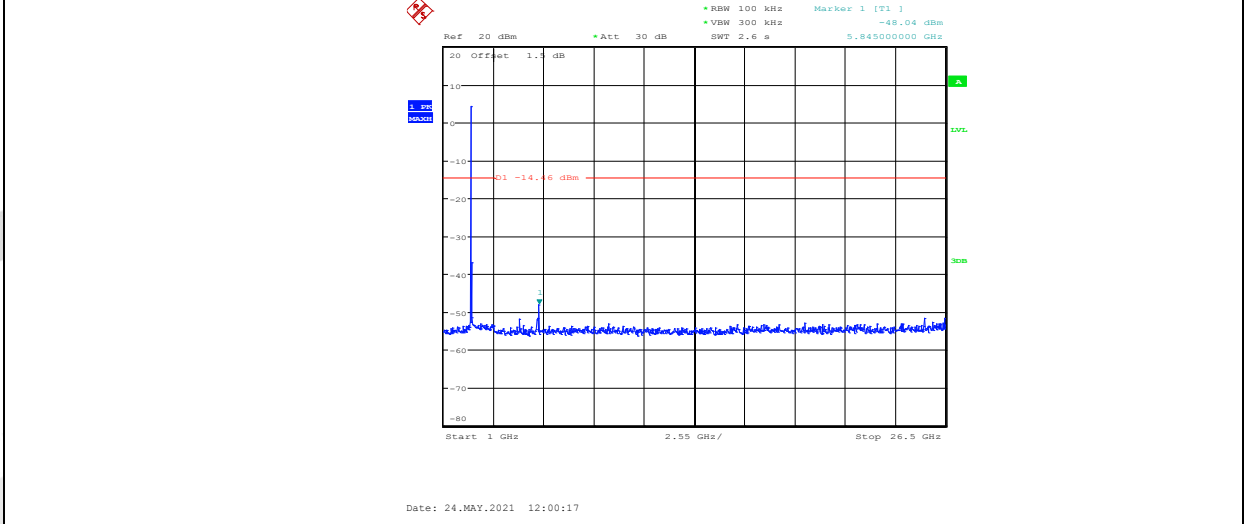


11N20MIMO_ANT1_2462_Ref

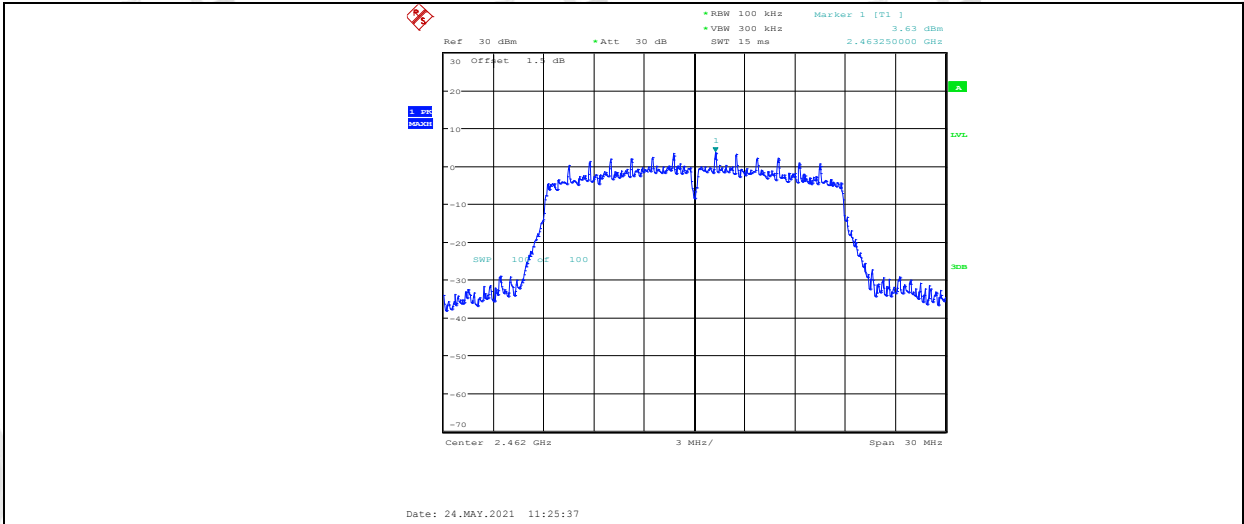


11N20MIMO_ANT1_2462_30~1000

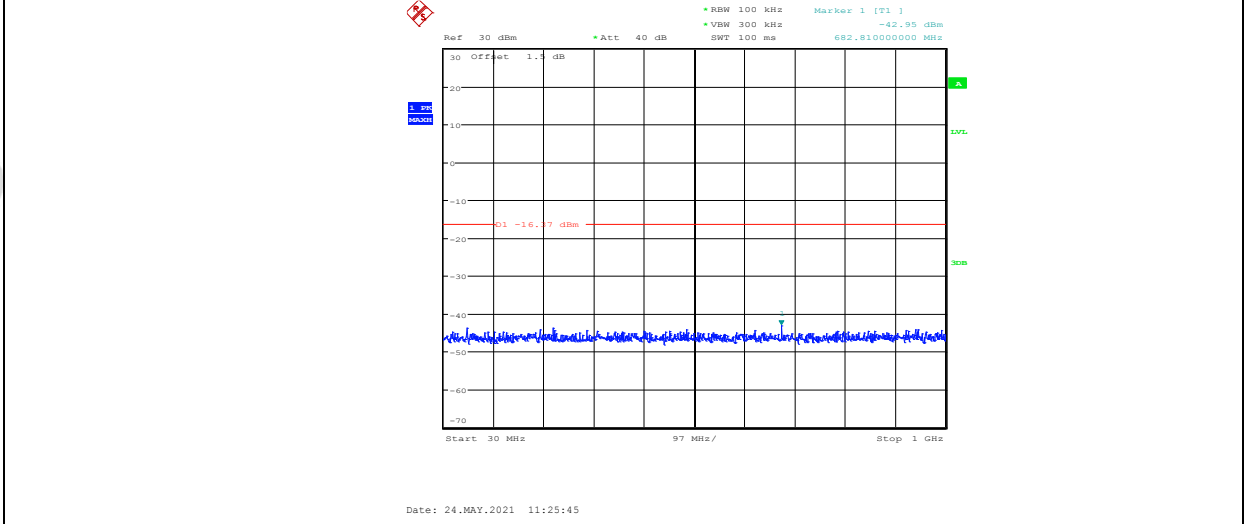


11N20MIMO_ANT1_2462_1000~26500

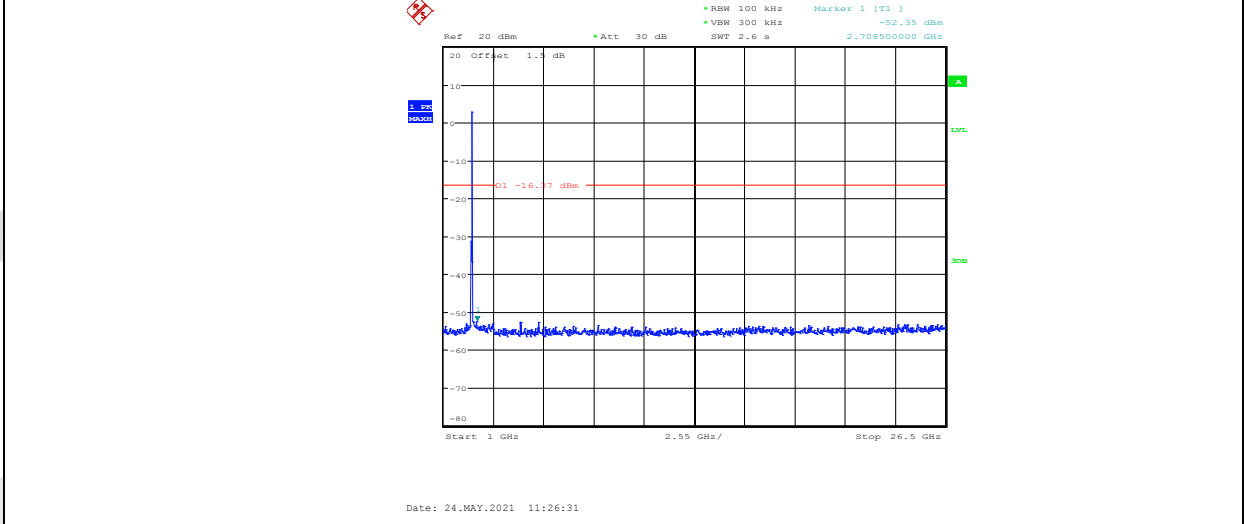


11N20MIMO_ANT2_2462_Ref

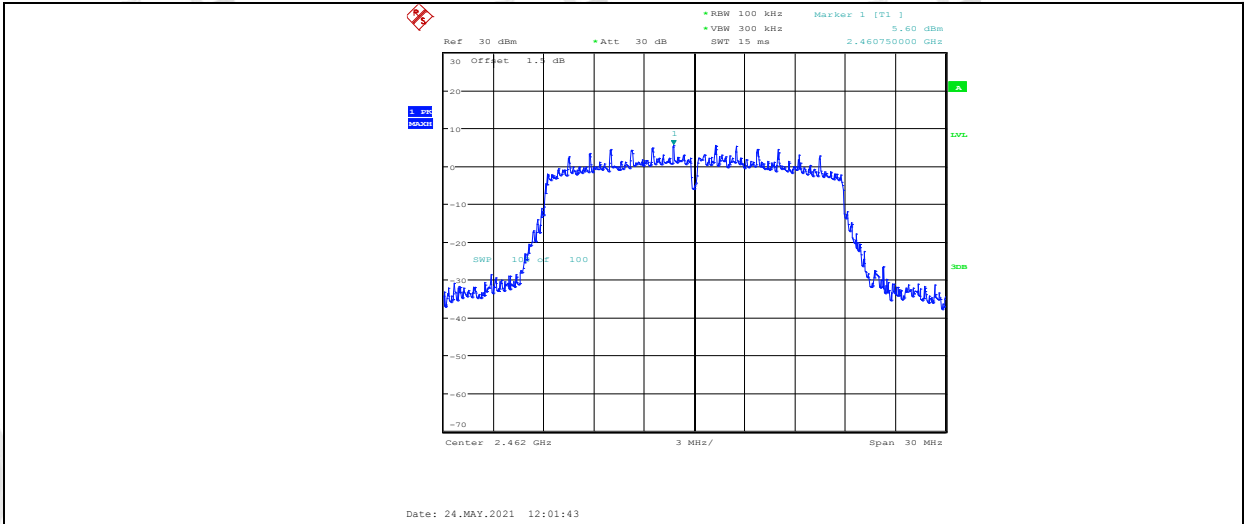


11N20MIMO_ANT2_2462_30~1000

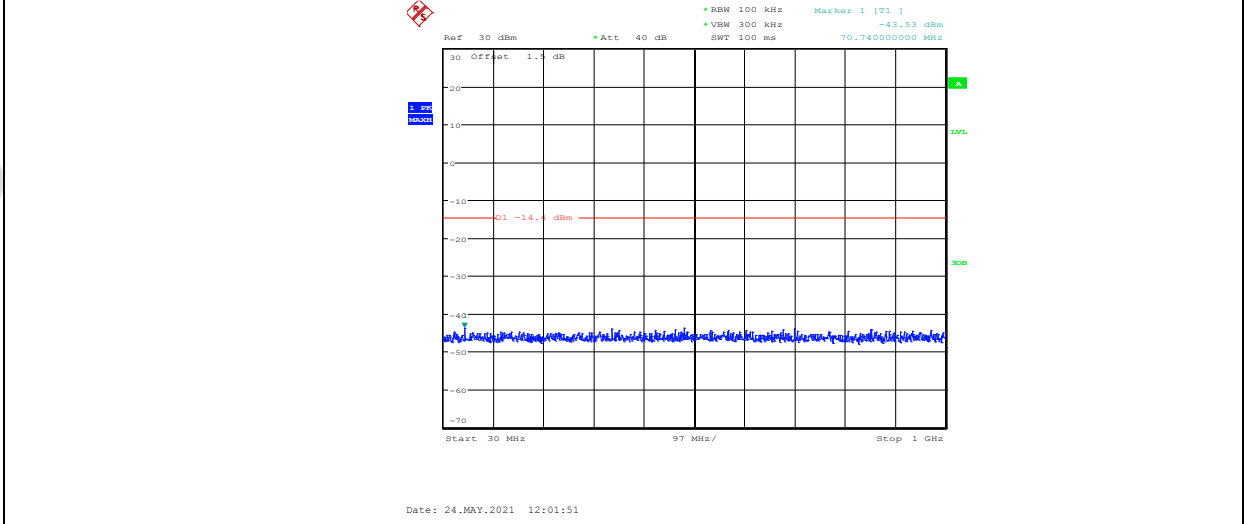

11N20MIMO_ANT2_2462_1000~26500

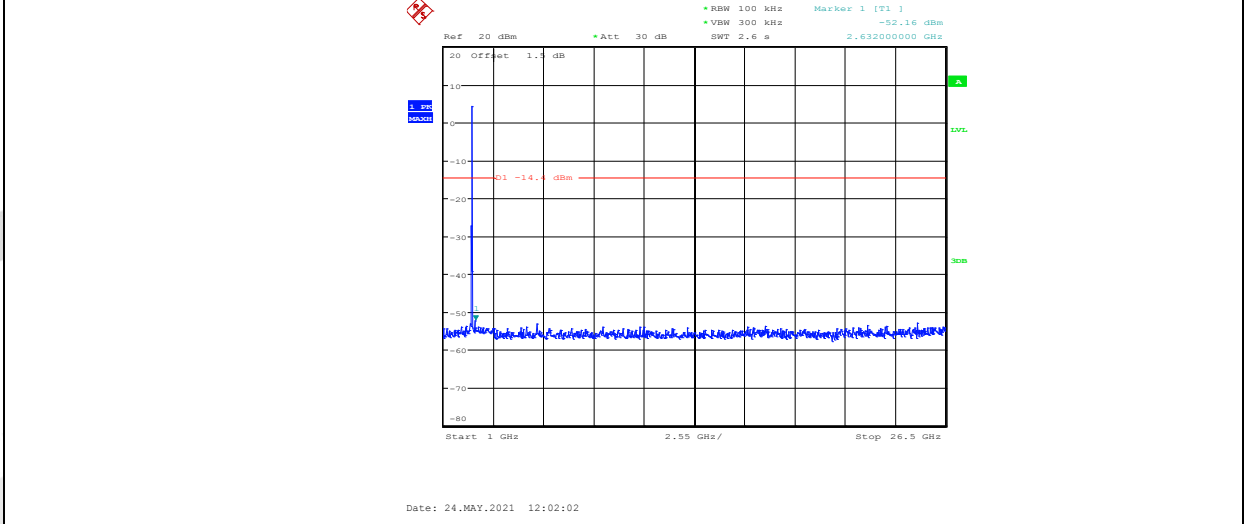


11N40MIMO_ANT1_2422_Ref

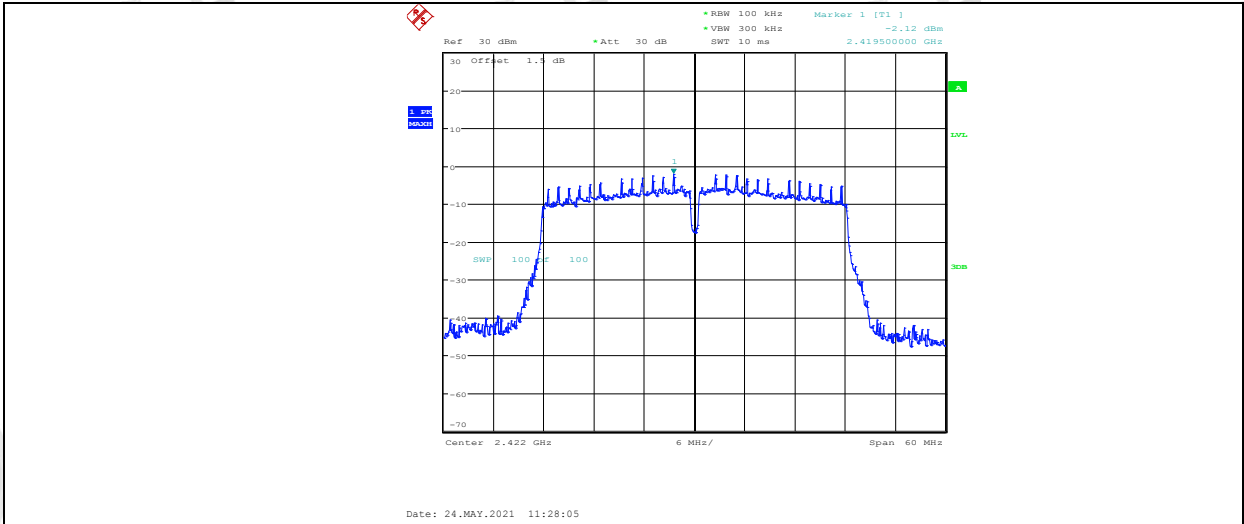


Date: 24.MAY.2021 11:28:05

11N40MIMO_ANT1_2422_30~1000

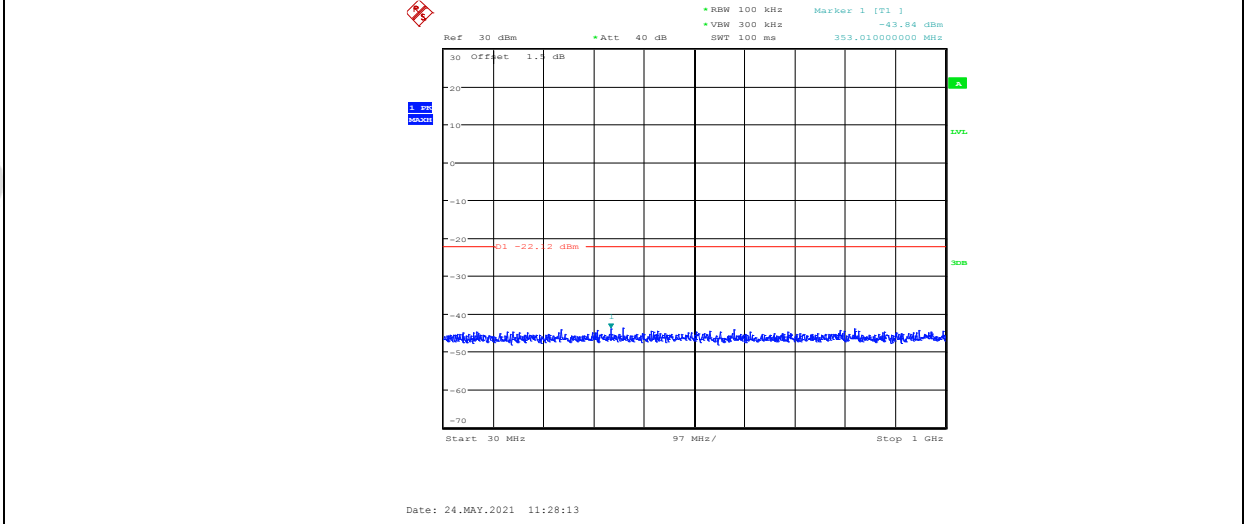


Date: 24.MAY.2021 11:28:13

11N40MIMO_ANT1_2422_1000~26500

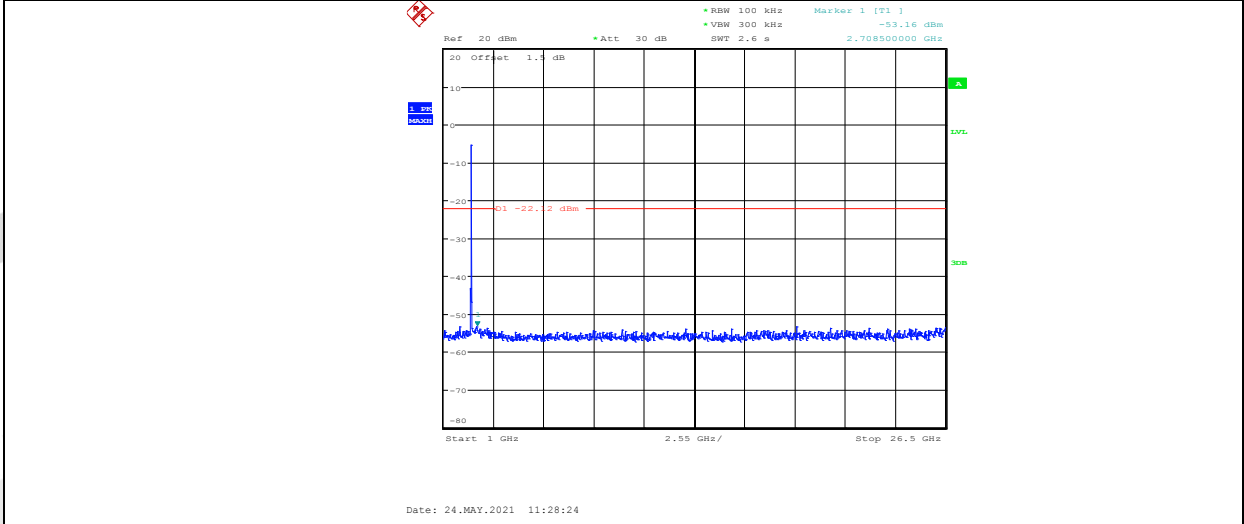


Date: 24.MAY.2021 11:28:24


11N40MIMO_ANT2_2422_Ref

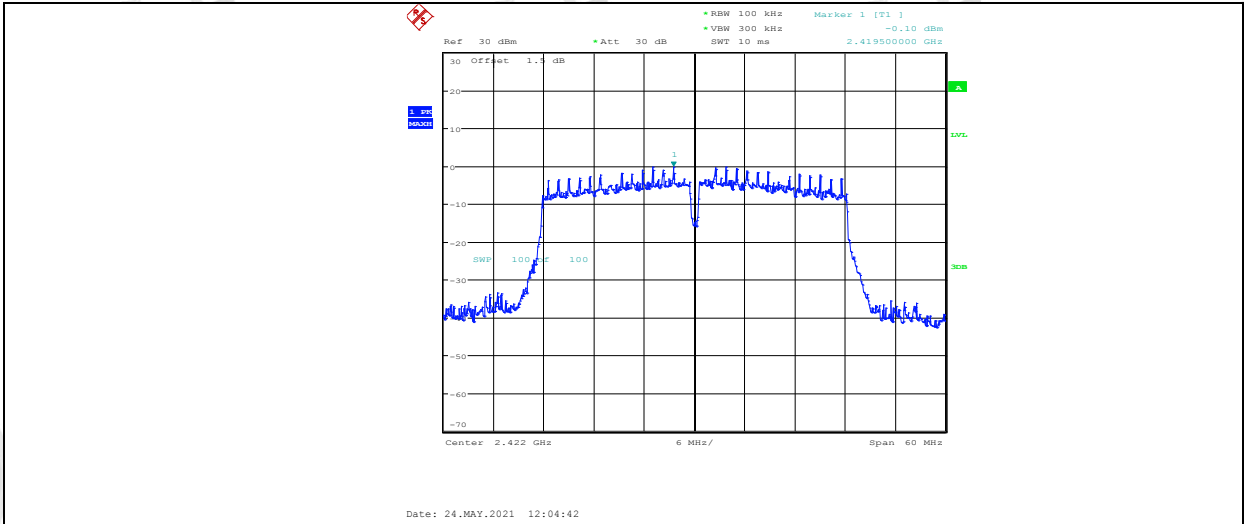


11N40MIMO_ANT2_2422_30~1000

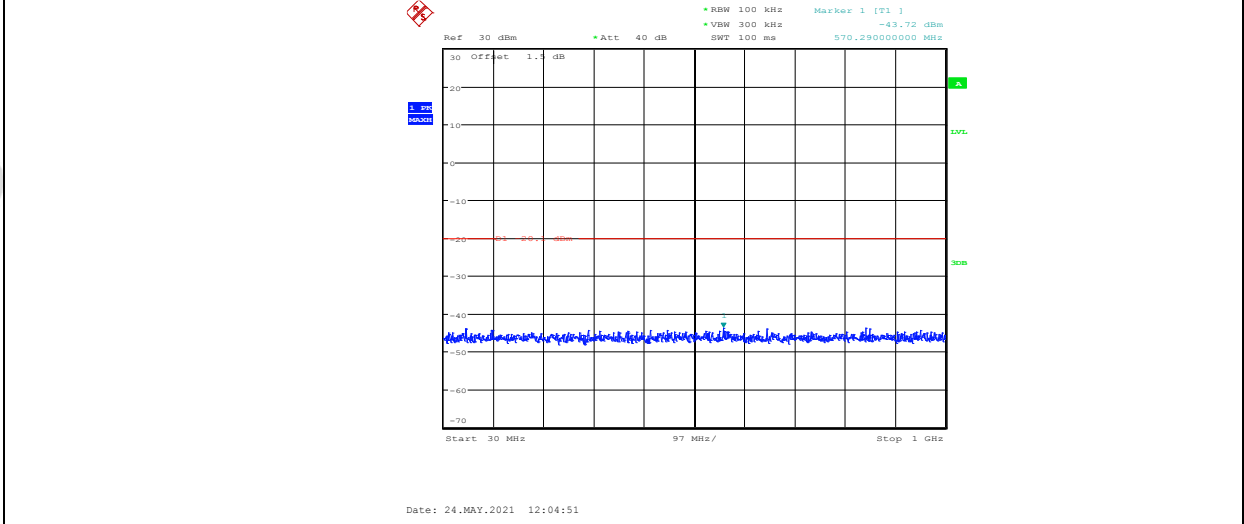

11N40MIMO_ANT2_2422_1000~26500

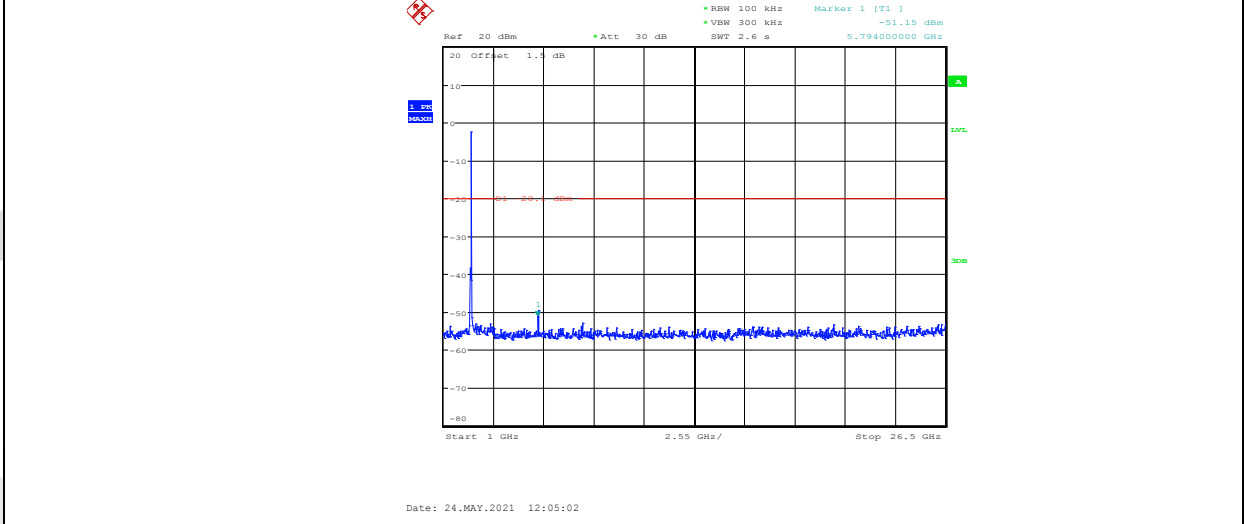


11N40MIMO_ANT1_2437_Ref

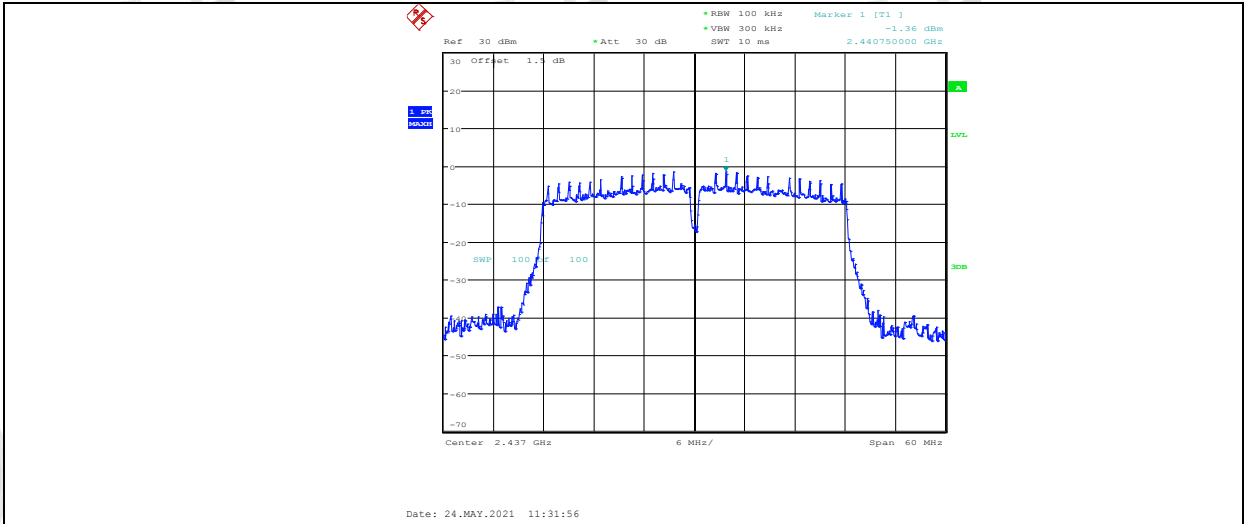


Date: 24.MAY.2021 11:31:56

11N40MIMO_ANT1_2437_30~1000

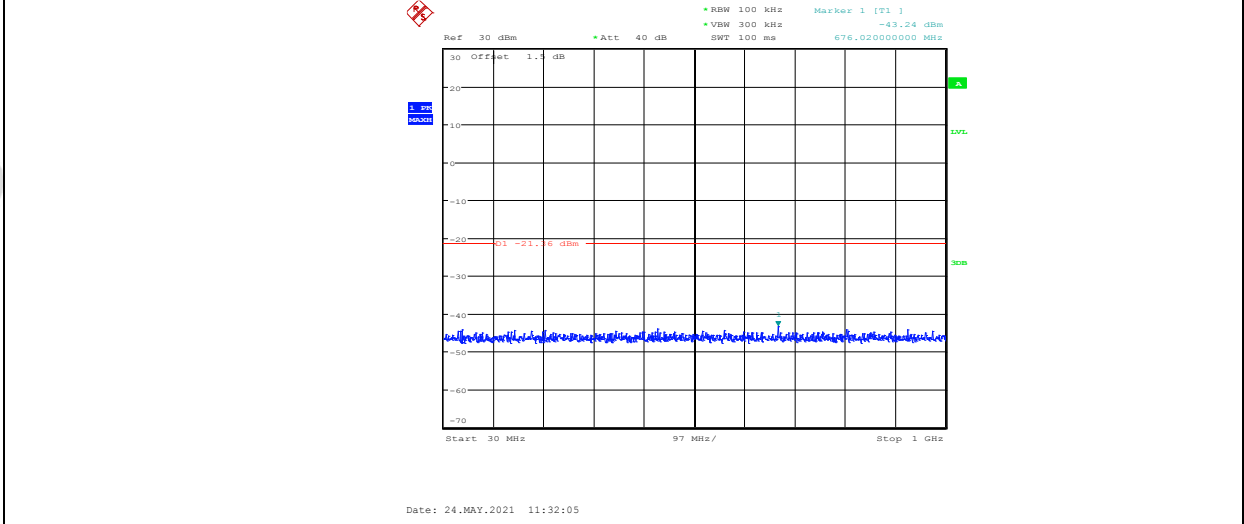


Date: 24.MAY.2021 11:32:05

11N40MIMO_ANT1_2437_1000~26500

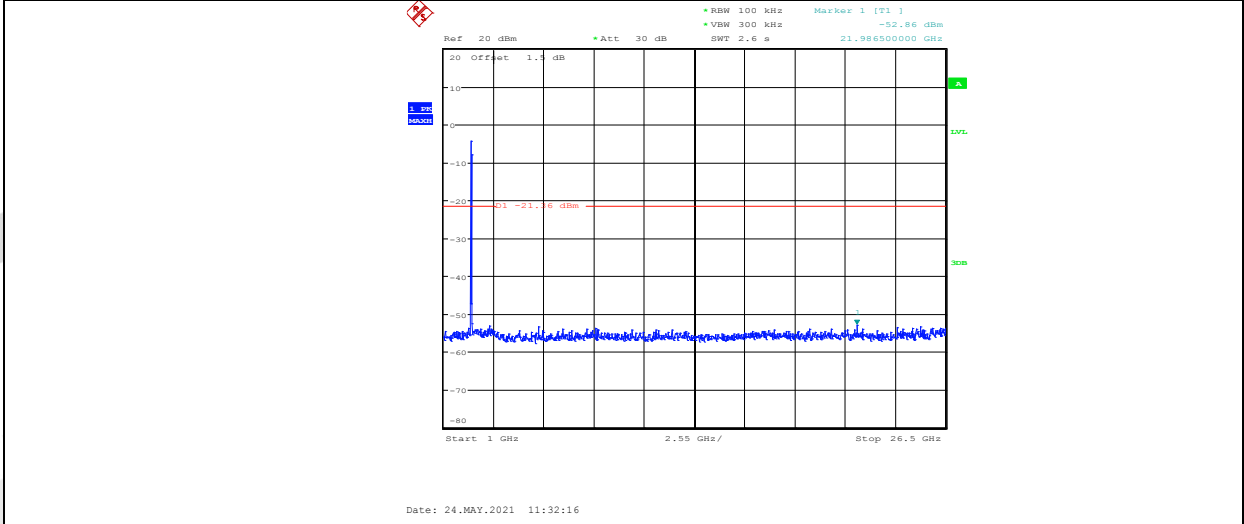


Date: 24.MAY.2021 11:32:16


11N40MIMO_ANT2_2437_Ref

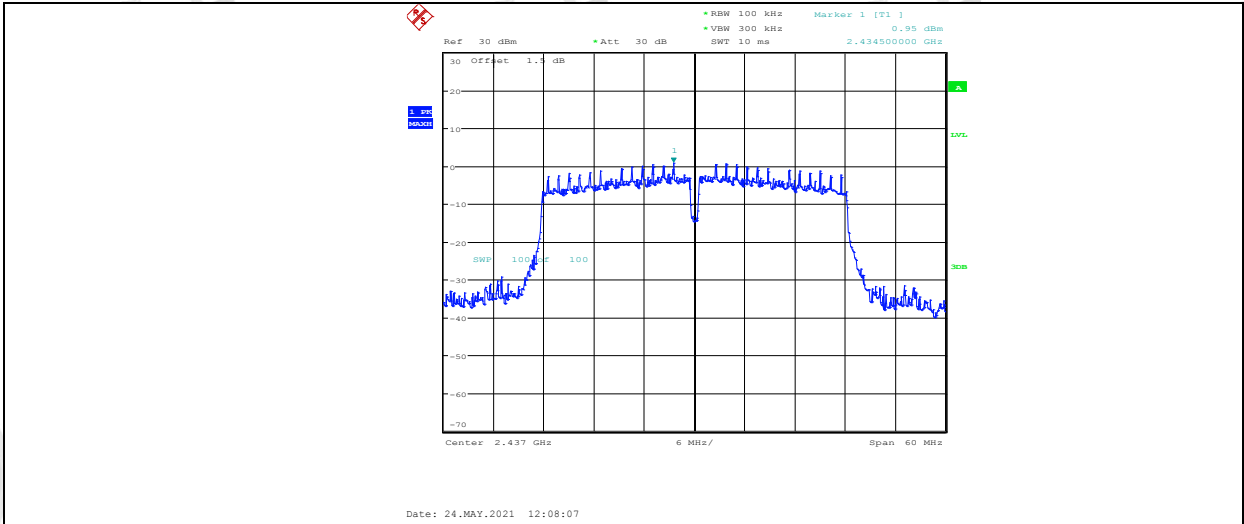


11N40MIMO_ANT2_2437_30~1000

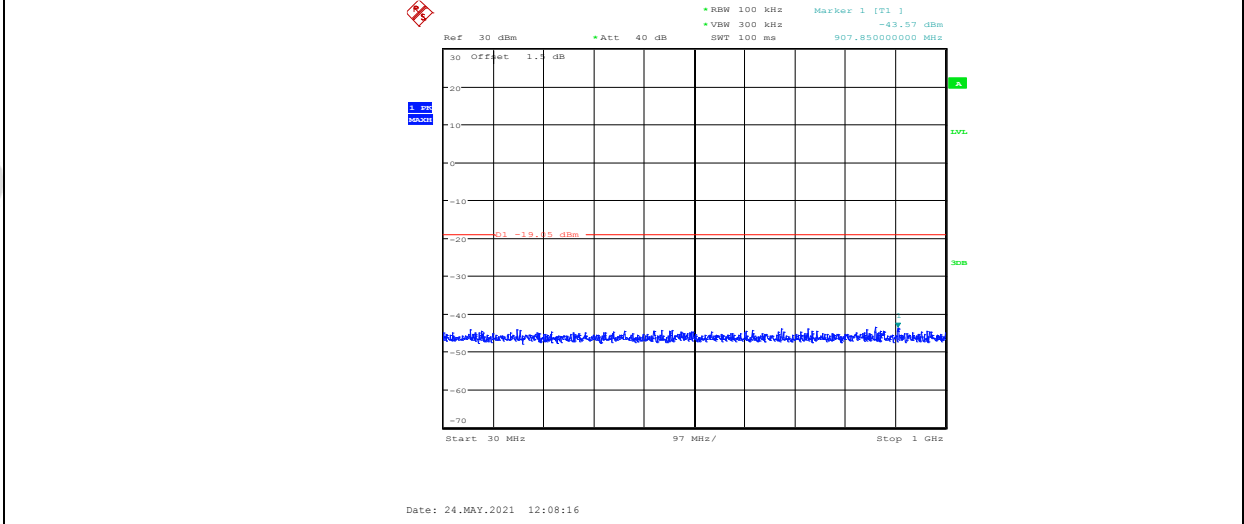


11N40MIMO_ANT2_2437_1000~26500

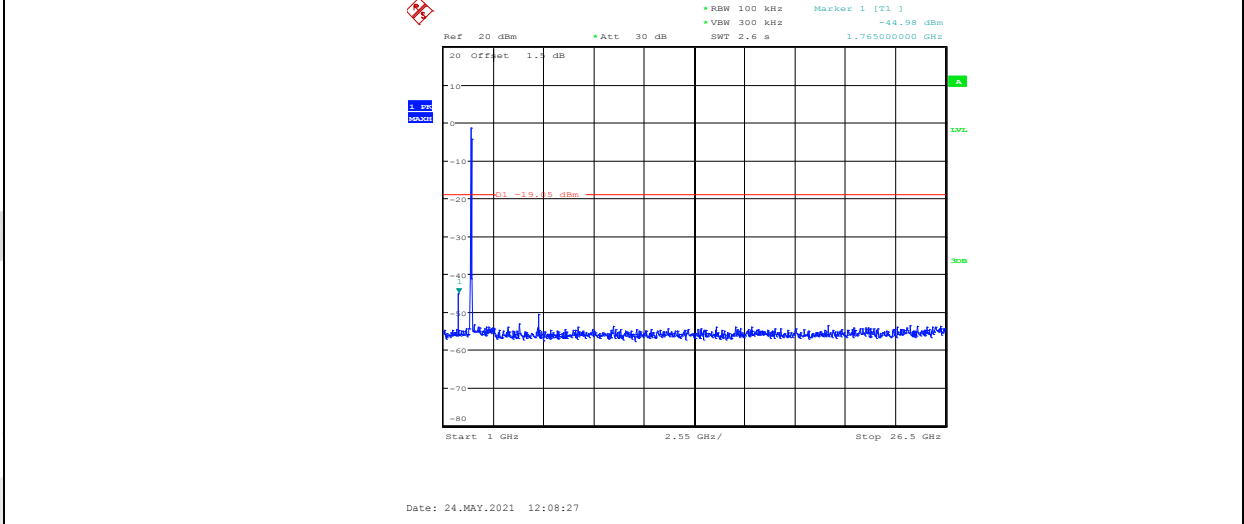


11N40MIMO_ANT1_2452_Ref

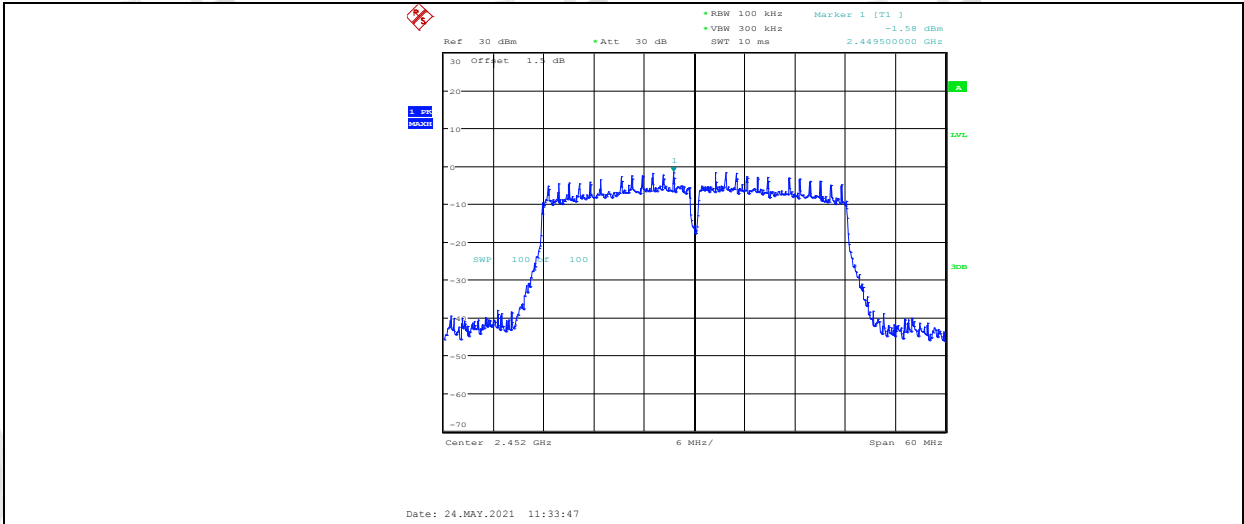


11N40MIMO_ANT1_2452_30~1000

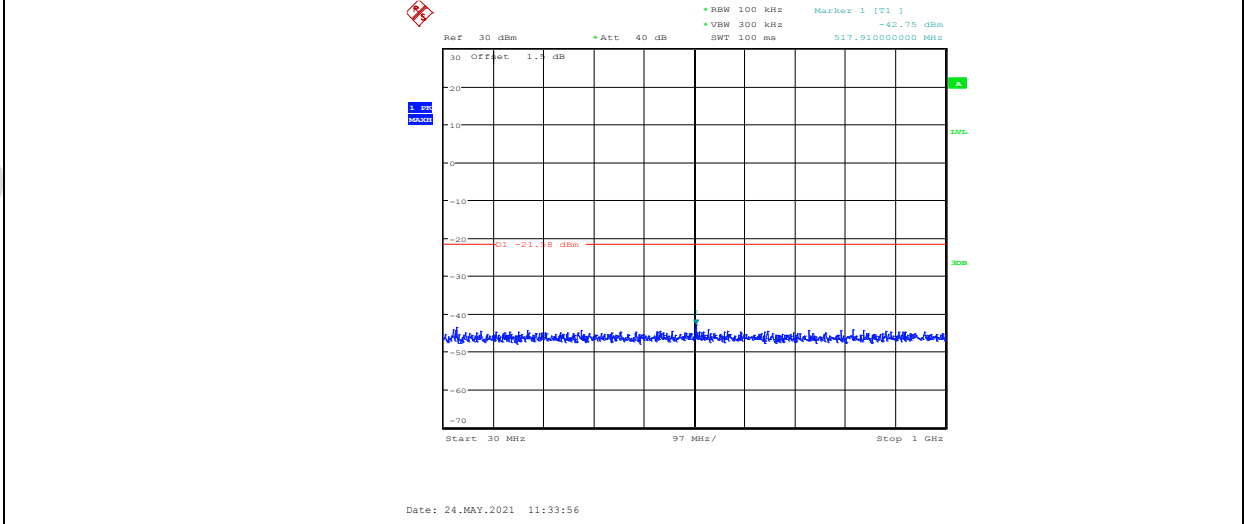


11N40MIMO_ANT1_2452_1000~26500

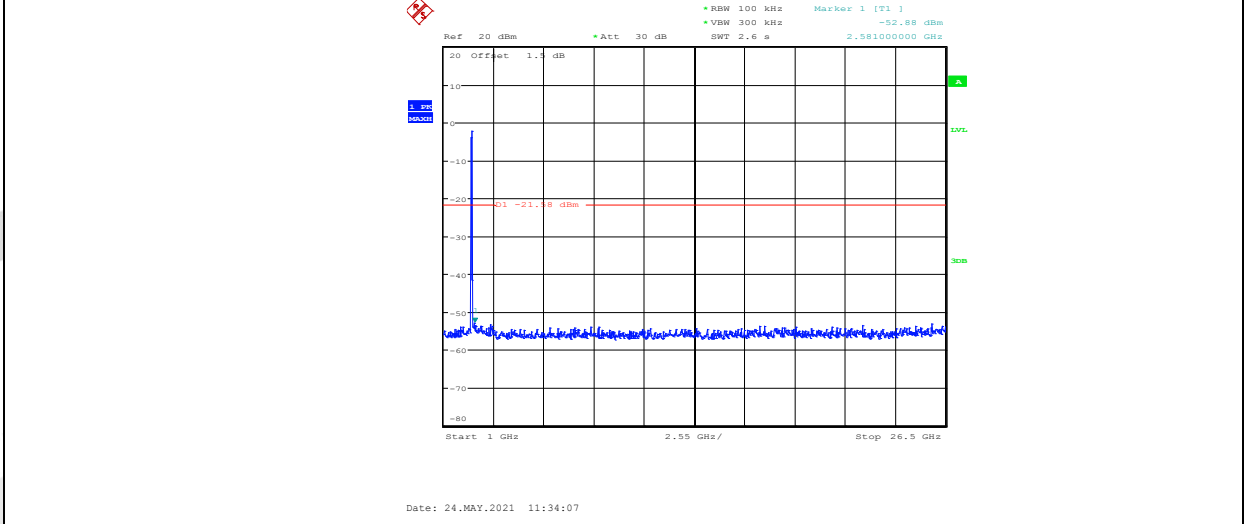


11N40MIMO_ANT2_2452_Ref

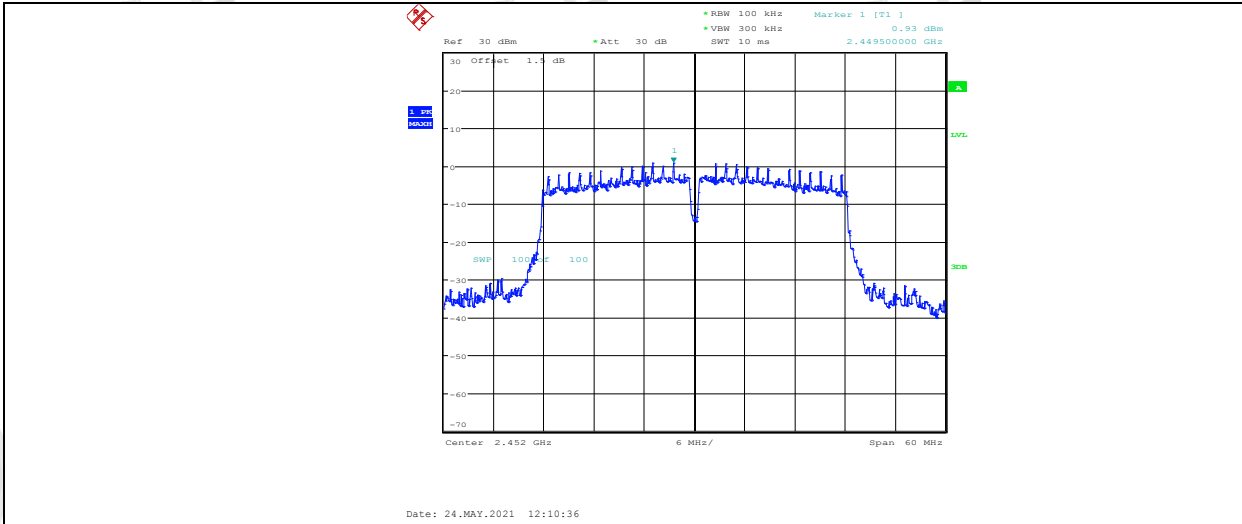

11N40MIMO_ANT2_2452_30~1000

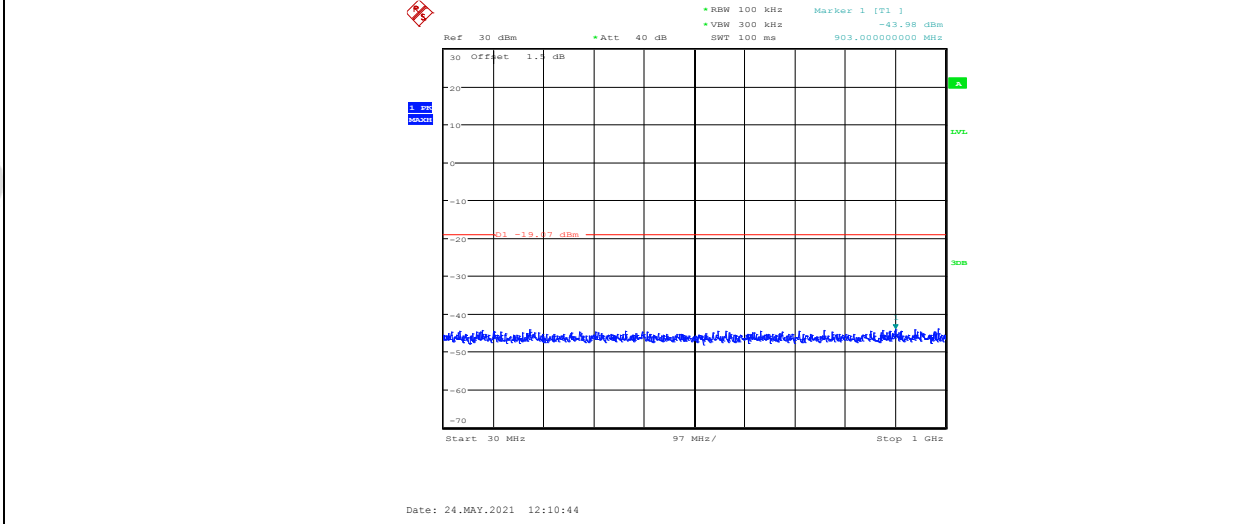


11N40MIMO_ANT2_2452_1000~26500

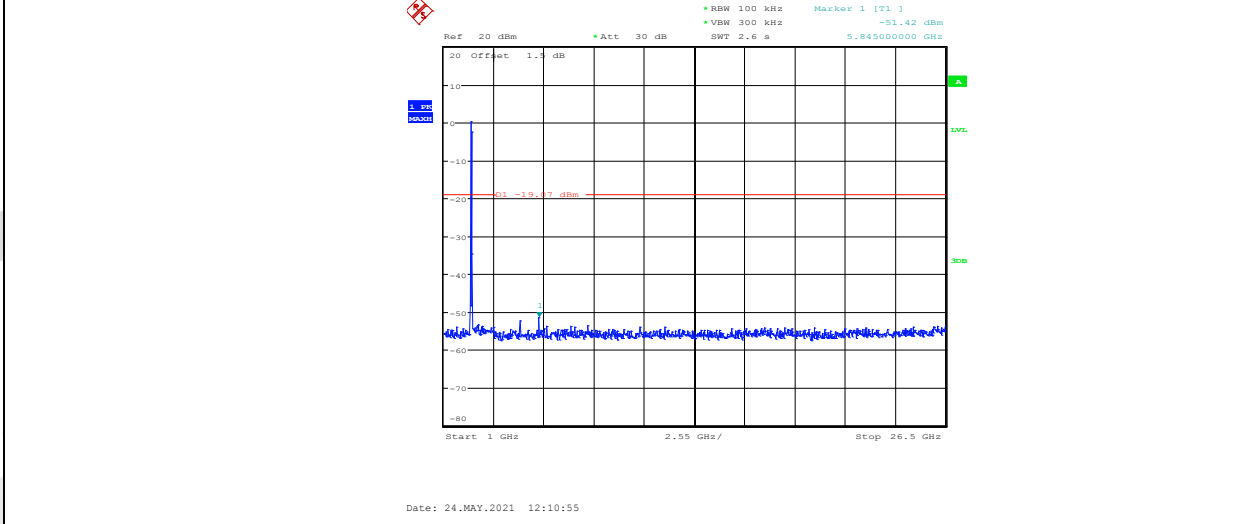


8. Radiated Spurious Emissions

8.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9 kHz-30 MHz

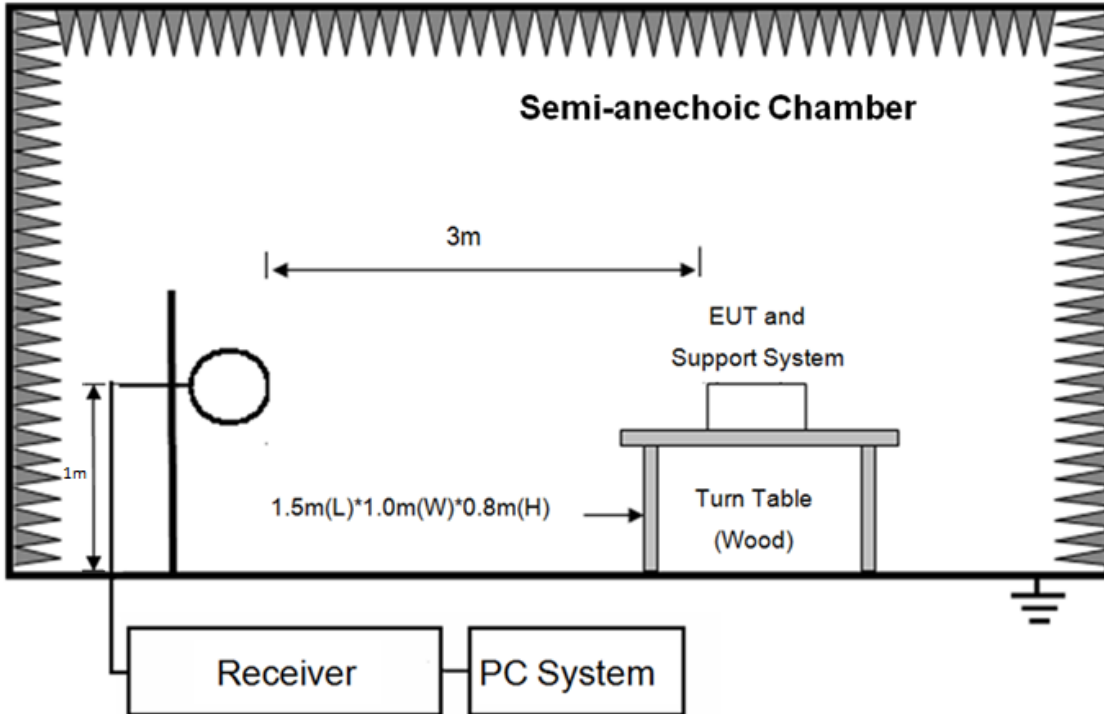

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

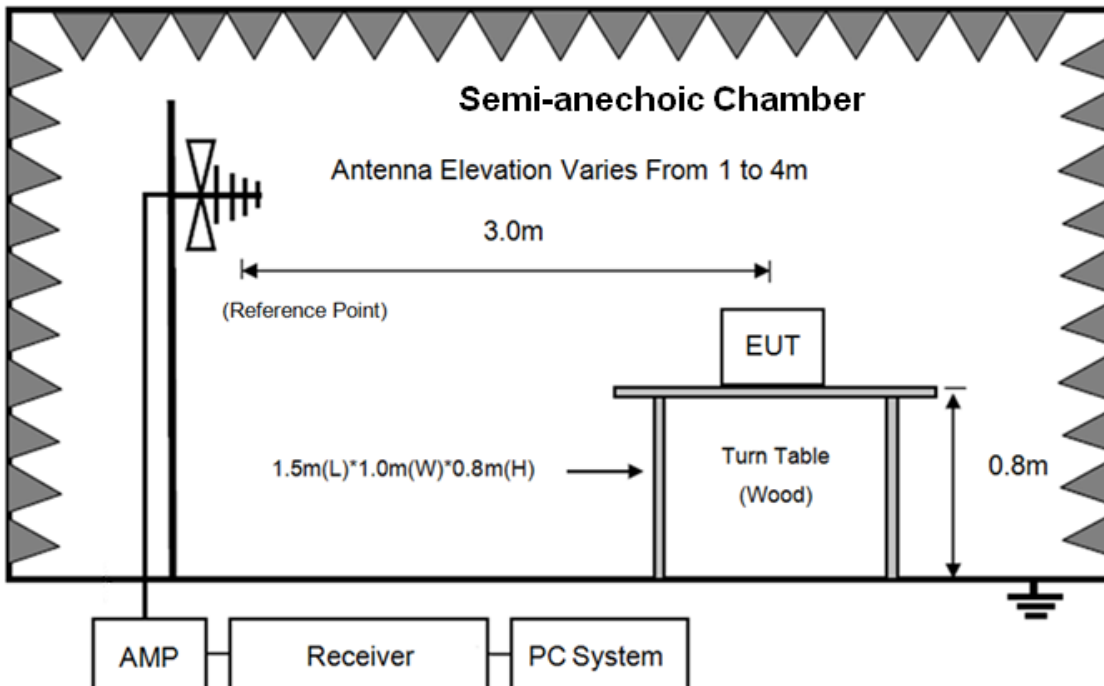

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

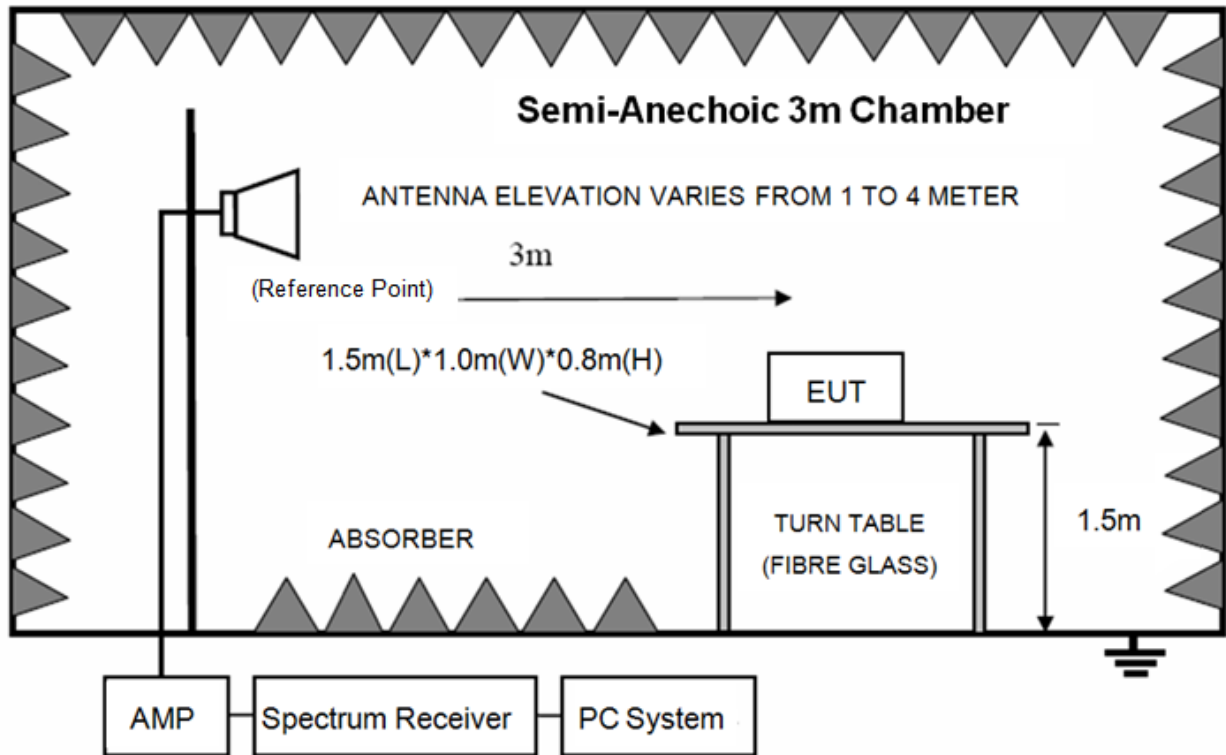

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(?)
13.36-13.41			

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test Procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi - anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

8.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.


Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in ANT1, 11n HT20, Tx CH11 mode.

Note3: For simultaneous transmission of multiple channels in the 2.4GHz BT, WLAN and 5.8GHz SRD bands, no noticeable emission was found.

Radiated Emission test (below 1GHz) TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-05-30
EUT : SOUNDBAR
Power Supply : AC 120V/60Hz
Condition : Temp:23.3°C,Humi:45%,Press:100.1kPa
Memo :
D:\2021 RE2# Report Data\Q21050705-2E JBL Bar5.1\FCC BELOW1G.EM6
Tested By : Jacky Huang
Model Number : BAR 5.1 CNTR
Test Mode : Tx mode
Antenna/Distance : 2020 VULB 9163
 2#/3m/VERTICAL

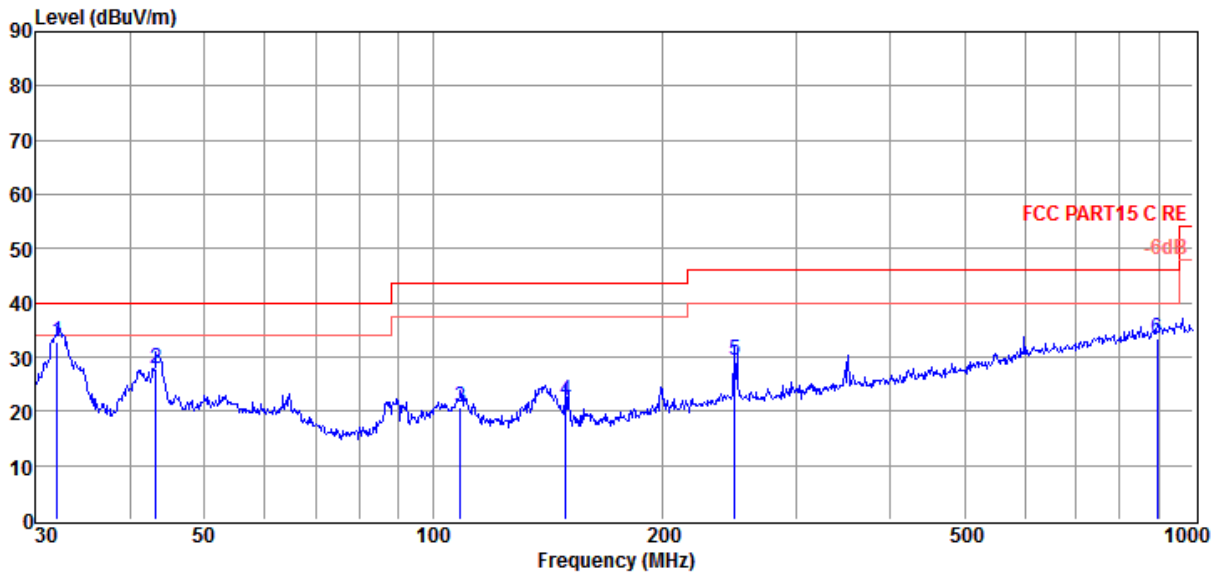

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	32.07	19.15	9.81	3.71	32.67	40.00	-7.33	QP	VERTICAL
2	43.20	11.60	12.58	3.79	27.97	40.00	-12.03	QP	VERTICAL
3	108.65	5.44	10.88	4.47	20.79	43.50	-22.71	QP	VERTICAL
4	149.49	9.44	7.79	4.75	21.98	43.50	-21.52	QP	VERTICAL
5	249.43	11.65	12.35	5.27	29.27	46.00	-16.73	QP	VERTICAL
6	897.00	3.74	21.86	7.69	33.29	46.00	-12.71	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL Bar5.1\FCC BELOW1G.EM6

Test Date : 2021-05-30

Tested By : Jacky Huang

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:23.3°C,Humi:45%,Press:100.1kPa **Antenna/Distance** : 2020 VULB 9163 2#/3m/HORIZONTAL

Memo :

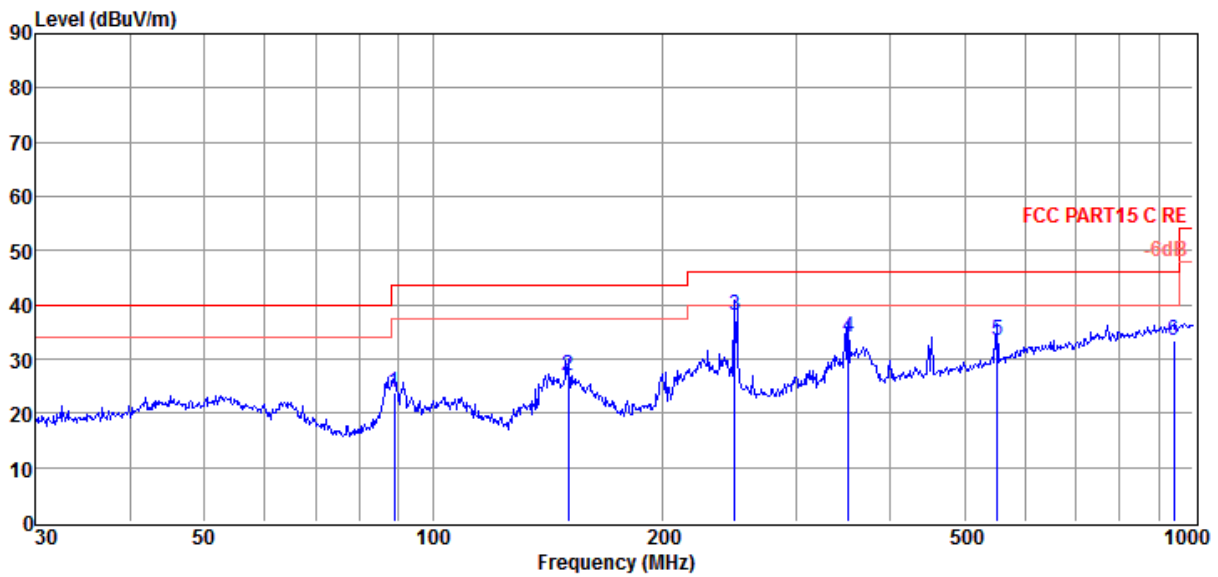

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	88.96	10.45	9.10	4.32	23.87	43.50	-19.63	QP	HORIZONTAL
2	150.54	14.46	7.83	4.75	27.04	43.50	-16.46	QP	HORIZONTAL
3	249.43	20.27	12.35	5.27	37.89	46.00	-8.11	QP	HORIZONTAL
4	351.71	13.21	15.01	5.72	33.94	46.00	-12.06	QP	HORIZONTAL
5	552.88	9.05	17.79	6.51	33.35	46.00	-12.65	QP	HORIZONTAL
6	942.13	3.52	21.98	7.84	33.34	46.00	-12.66	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dB μ V)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector type	Polarization
11b CH1									
4824.00	57.86	32.35	43.33	6.82	53.70	74.00	-20.30	Peak	HORIZONTAL
4824.00	53.20	32.35	43.33	6.82	49.04	54.00	-4.96	Average	HORIZONTAL
7664.00	45.96	37.36	42.52	8.77	49.57	74.00	-24.43	Peak	HORIZONTAL
10469.00	45.52	39.55	42.54	10.36	52.89	74.00	-21.11	Peak	HORIZONTAL
13886.00	43.53	41.34	42.56	12.13	54.44	74.00	-19.56	Peak	HORIZONTAL
13886.00	36.07	41.34	42.56	12.13	46.98	54.00	-7.02	Average	HORIZONTAL
16181.00	42.94	39.76	42.28	12.84	53.26	74.00	-20.74	Peak	HORIZONTAL
17864.00	41.51	47.43	42.46	14.31	60.79	74.00	-13.21	Peak	HORIZONTAL
17864.00	30.97	47.43	42.46	14.31	50.25	54.00	-3.75	Average	HORIZONTAL
4824.00	52.83	32.35	43.33	6.82	48.67	74.00	-25.33	Peak	VERTICAL
7749.00	46.25	37.50	42.47	8.73	50.01	74.00	-23.99	Peak	VERTICAL
10401.00	45.94	39.44	42.49	10.34	53.23	74.00	-20.77	Peak	VERTICAL
13886.00	44.95	41.34	42.56	12.13	55.86	74.00	-18.14	Peak	VERTICAL
13886.00	35.77	41.34	42.56	12.13	46.68	54.00	-7.32	Average	VERTICAL
16130.00	42.75	39.55	42.29	12.79	52.80	74.00	-21.20	Peak	VERTICAL
17864.00	40.88	47.43	42.46	14.31	60.16	74.00	-13.84	Peak	VERTICAL
17864.00	31.57	47.43	42.46	14.31	50.85	54.00	-3.15	Average	VERTICAL
11b CH6									
4884.00	58.85	32.47	43.28	6.90	54.94	74.00	-19.06	Peak	HORIZONTAL
4884.00	53.46	32.47	43.28	6.90	49.55	54.00	-4.45	Average	HORIZONTAL
8310.00	45.26	37.96	42.14	8.74	49.82	74.00	-24.18	Peak	HORIZONTAL
10775.00	45.61	39.71	42.75	10.48	53.05	74.00	-20.95	Peak	HORIZONTAL
13886.00	44.25	41.34	42.56	12.13	55.16	74.00	-18.84	Peak	HORIZONTAL
13886.00	35.67	41.34	42.56	12.13	46.58	54.00	-7.42	Average	HORIZONTAL
16198.00	42.54	39.83	42.28	12.86	52.95	74.00	-21.05	Peak	HORIZONTAL
17847.00	40.95	47.36	42.46	14.27	60.12	74.00	-13.88	Peak	HORIZONTAL
17847.00	30.92	47.36	42.46	14.27	50.09	54.00	-3.91	Average	HORIZONTAL
4884.00	55.12	32.47	43.28	6.90	51.21	74.00	-22.79	Peak	VERTICAL
7749.00	47.14	37.50	42.47	8.73	50.90	74.00	-23.10	Peak	VERTICAL
10146.00	44.78	39.03	42.31	10.30	51.80	74.00	-22.20	Peak	VERTICAL
12305.00	46.40	39.17	41.90	11.70	55.37	74.00	-18.63	Peak	VERTICAL
12305.00	37.97	39.17	41.90	11.70	46.94	54.00	-7.06	Average	VERTICAL
15263.00	41.95	39.98	41.86	12.71	52.78	74.00	-21.22	Peak	VERTICAL
17864.00	42.38	47.43	42.46	14.31	61.66	74.00	-12.34	Peak	VERTICAL
17864.00	31.07	47.43	42.46	14.31	50.35	54.00	-3.65	Average	VERTICAL
11b CH11									
4924.00	58.26	32.55	43.25	6.95	54.51	74.00	-19.49	Peak	HORIZONTAL
4924.00	54.75	32.55	43.25	6.95	51.00	54.00	-3.00	Average	HORIZONTAL
7936.00	46.09	37.80	42.34	8.66	50.21	74.00	-23.79	Peak	HORIZONTAL
10469.00	45.44	39.55	42.54	10.36	52.81	74.00	-21.19	Peak	HORIZONTAL
12271.00	45.91	39.22	41.85	11.63	54.91	74.00	-19.09	Peak	HORIZONTAL
12271.00	37.58	39.22	41.85	11.63	46.58	54.00	-7.42	Average	HORIZONTAL
15620.00	43.62	39.46	42.08	12.45	53.45	74.00	-20.55	Peak	HORIZONTAL

17779.00	41.23	47.07	42.44	14.10	59.96	74.00	-14.04	Peak	HORIZONTAL
17779.00	31.68	47.07	42.44	14.10	50.41	54.00	-3.59	Average	HORIZONTAL
4924.00	53.99	32.55	43.25	6.95	50.24	74.00	-23.76	Peak	VERTICAL
7885.00	46.54	37.72	42.38	8.68	50.56	74.00	-23.44	Peak	VERTICAL
10469.00	45.84	39.55	42.54	10.36	53.21	74.00	-20.79	Peak	VERTICAL
14141.00	43.63	41.44	42.38	12.22	54.91	74.00	-19.09	Peak	VERTICAL
14141.00	35.17	41.44	42.38	12.22	46.45	54.00	-7.55	Average	VERTICAL
16181.00	42.49	39.76	42.28	12.84	52.81	74.00	-21.19	Peak	VERTICAL
17881.00	41.89	47.50	42.47	14.35	61.27	74.00	-12.73	Peak	VERTICAL
17881.00	30.67	47.50	42.47	14.35	50.05	54.00	-3.95	Average	VERTICAL

Note: 1.30MHz~25GHz: (Scan with 11b mode ANT 1 and ANT 2, 11g mode ANT 1 and ANT 2, 11n HT20 mode ANT 1 and ANT 2, 11n HT40 mode ANT 1 and ANT 2, the worst case is 11b ANT 1 mode)


2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9. Radiated Band Edge Compliance

9.1. Block diagram of test setup

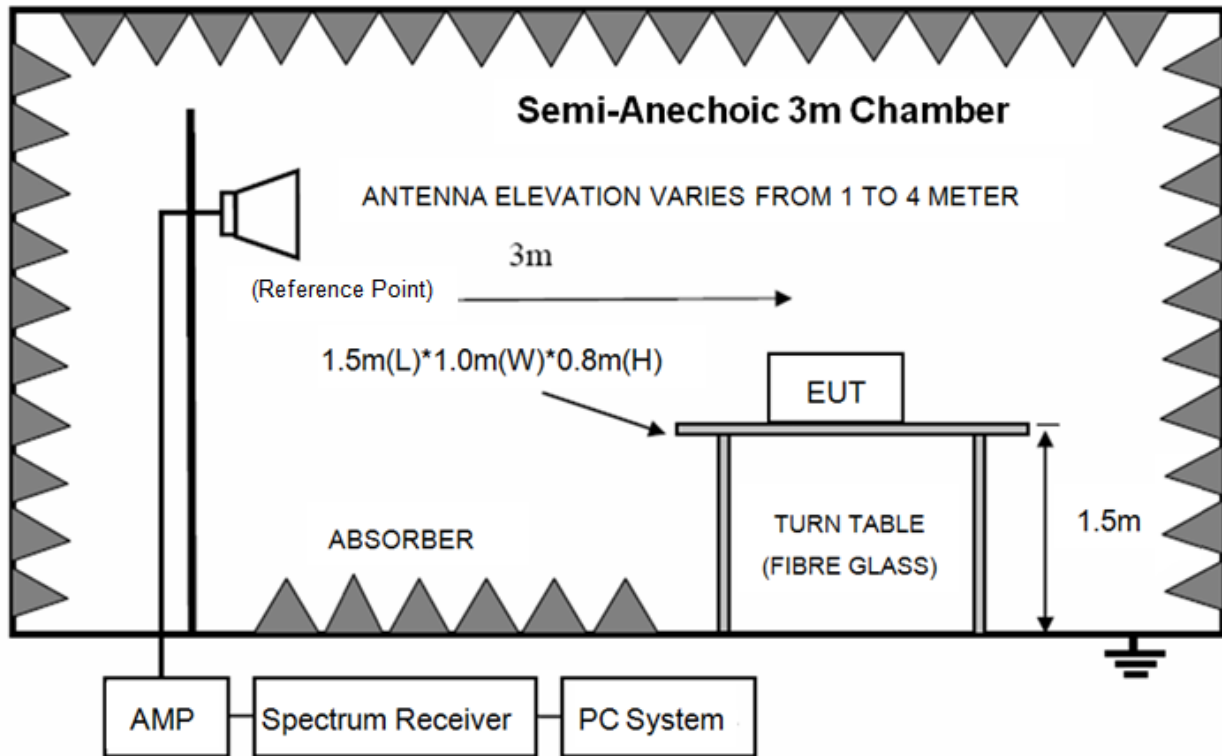

9.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

9.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2430 MHz and 2430 MHz to 2500 MHz, 2310 MHz to 2450 MHz and 2450 MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

9.4. Test result

PASS. (See below detailed test result)

Note: 11b, 11g, n20 mode ANT 1 and ANT 2 mode all have been tested, only Ant 1 mode is worse case and reported.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11B 2412 ANT1

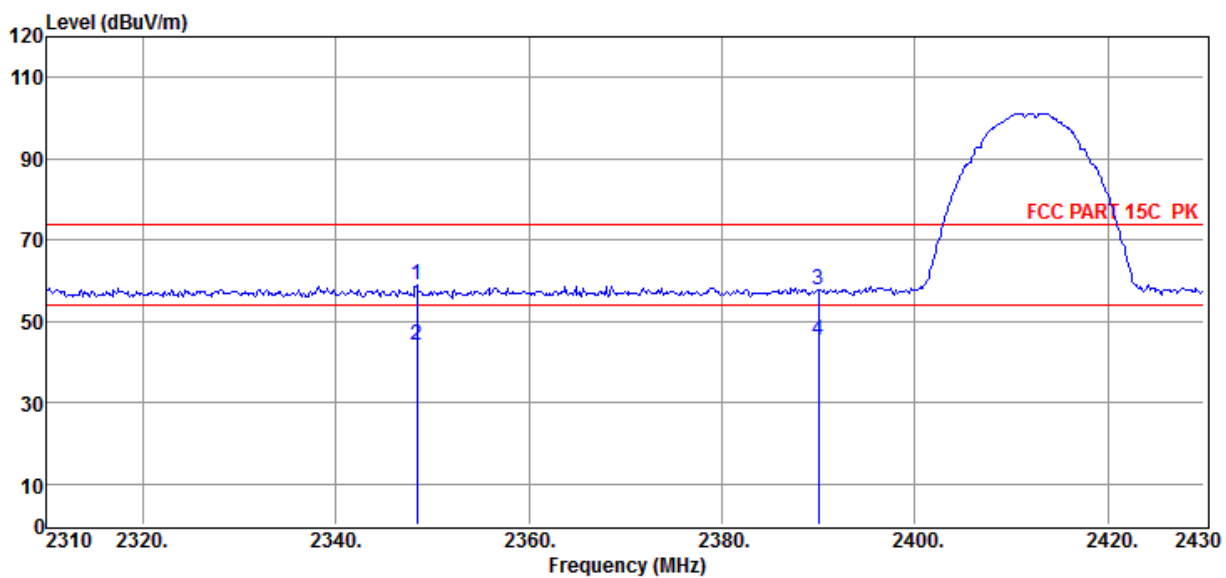

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2348.40	26.17	27.85	4.75	58.77	74.00	-15.23	Peak	VERTICAL
2	2348.40	11.55	27.85	4.75	44.15	54.00	-9.85	Average	VERTICAL
3	2390.00	25.11	27.89	4.80	57.80	74.00	-16.20	Peak	VERTICAL
4	2390.00	12.87	27.89	4.80	45.56	54.00	-8.44	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11B 2412 ANT1

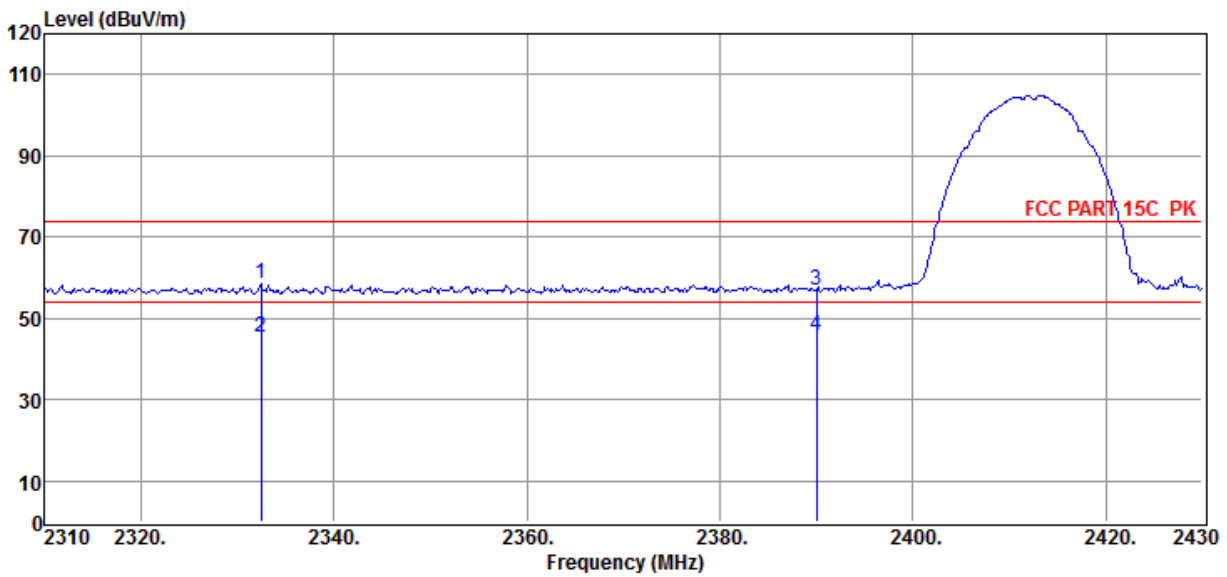

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2332.44	26.07	27.83	4.73	58.63	74.00	-15.37	Peak	HORIZONTAL
2	2332.44	13.01	27.83	4.73	45.57	54.00	-8.43	Average	HORIZONTAL
3	2390.00	24.33	27.89	4.80	57.02	74.00	-16.98	Peak	HORIZONTAL
4	2390.00	13.10	27.89	4.80	45.79	54.00	-8.21	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11B 2462 ANT1

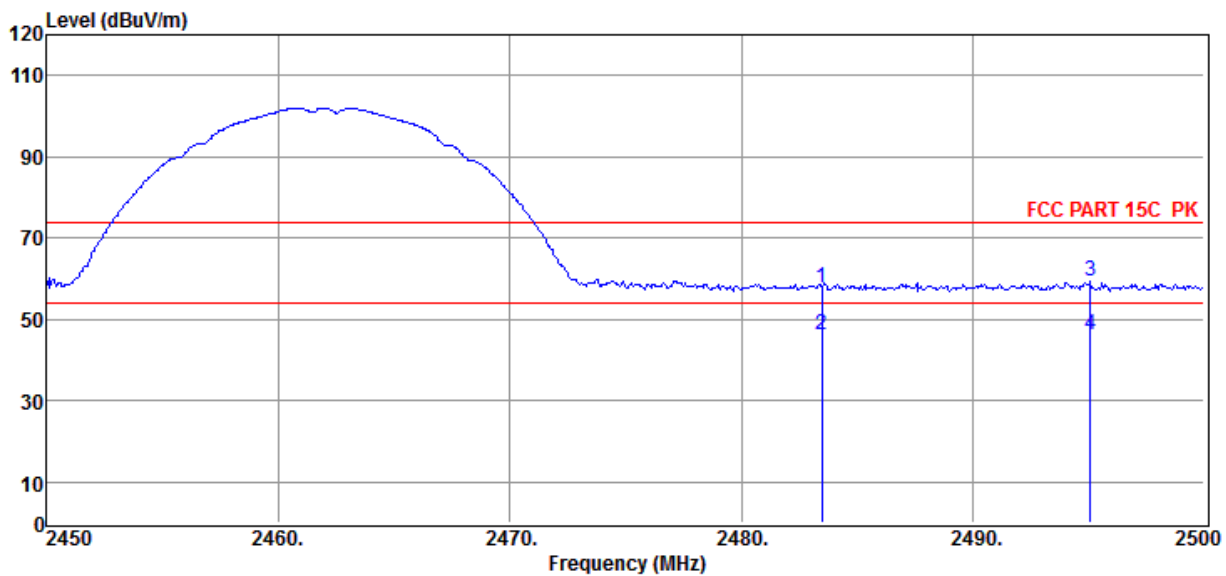

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.82	27.98	4.90	57.70	74.00	-16.30	Peak	VERTICAL
2	2483.50	13.45	27.98	4.90	46.33	54.00	-7.67	Average	VERTICAL
3	2495.10	26.66	28.00	4.91	59.57	74.00	-14.43	Peak	VERTICAL
4	2495.10	13.11	28.00	4.91	46.02	54.00	-7.98	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11B 2462 ANT1

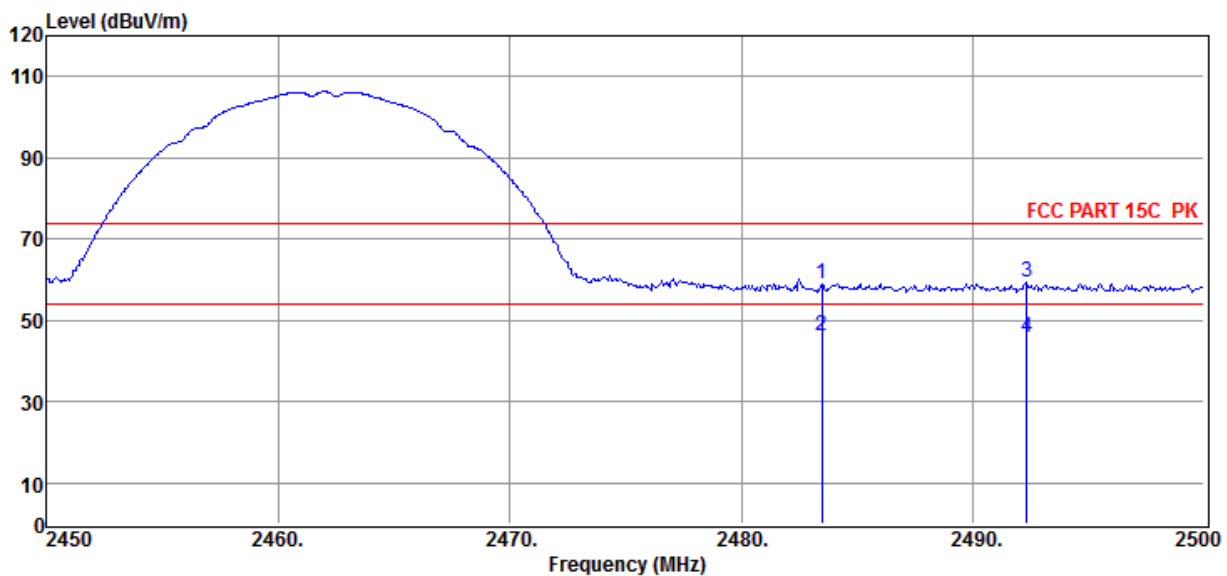

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	26.22	27.98	4.90	59.10	74.00	-14.90	Peak	HORIZONTAL
2	2483.50	13.15	27.98	4.90	46.03	54.00	-7.97	Average	HORIZONTAL
3	2492.35	26.32	27.99	4.91	59.22	74.00	-14.78	Peak	HORIZONTAL
4	2492.35	13.05	27.99	4.91	45.95	54.00	-8.05	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL
Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : BAR 11B 2412 ANT2

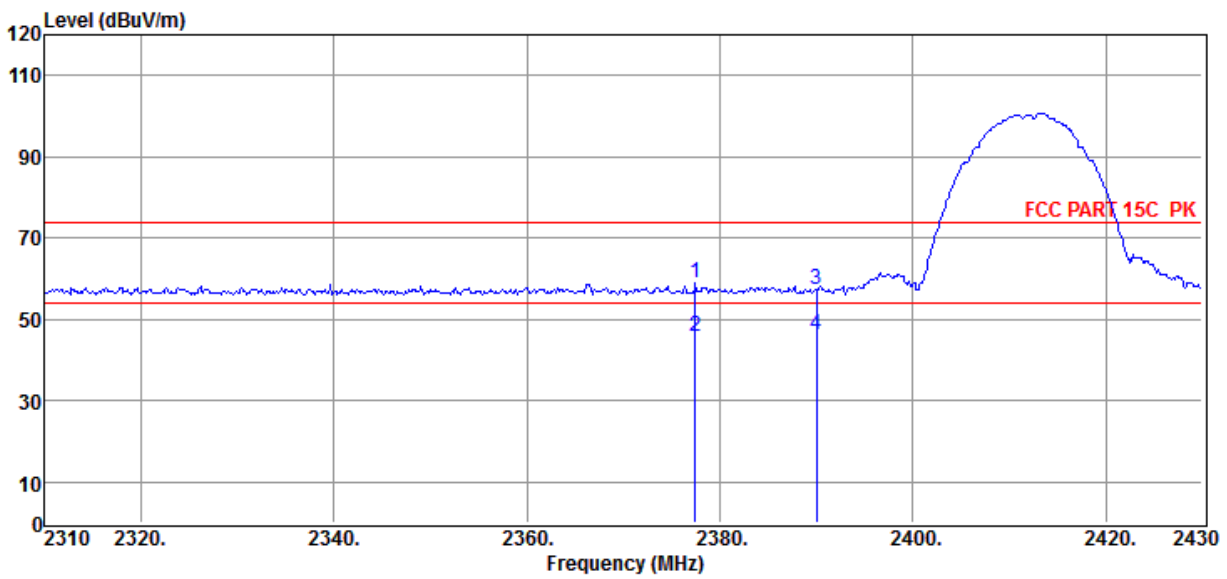

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2377.44	26.19	27.88	4.78	58.85	74.00	-15.15	Peak	VERTICAL
2	2377.44	13.04	27.88	4.78	45.70	54.00	-8.30	Average	VERTICAL
3	2390.00	24.73	27.89	4.80	57.42	74.00	-16.58	Peak	VERTICAL
4	2390.00	13.31	27.89	4.80	46.00	54.00	-8.00	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL
Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : BAR 11B 2412 ANT2

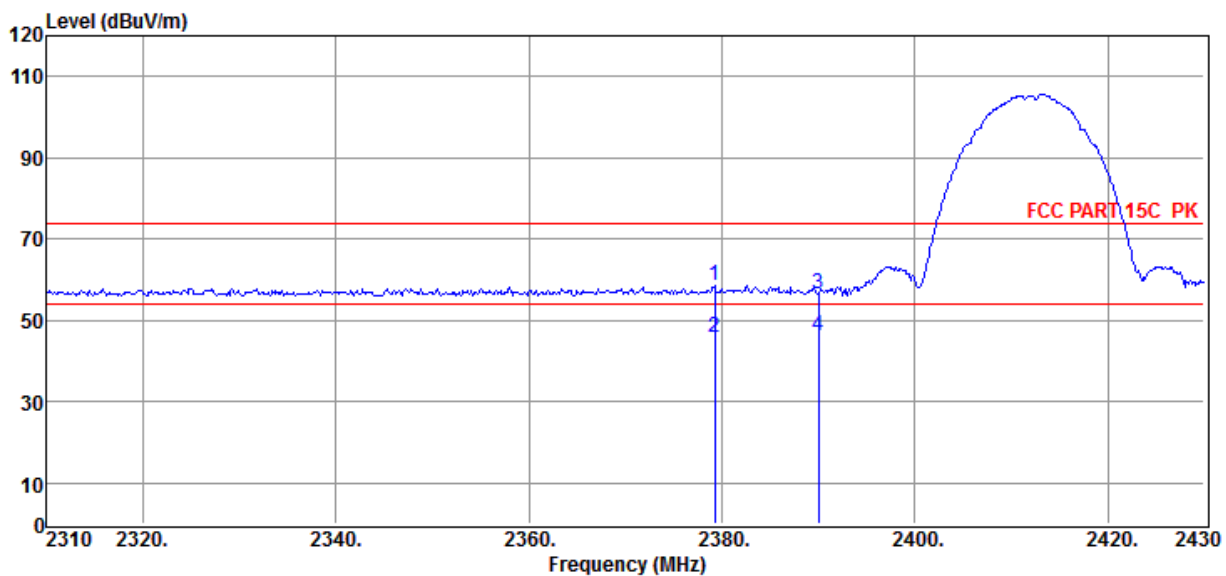

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2379.24	25.76	27.88	4.79	58.43	74.00	-15.57	Peak	HORIZONTAL
2	2379.24	13.07	27.88	4.79	45.74	54.00	-8.26	Average	HORIZONTAL
3	2390.00	23.63	27.89	4.80	56.32	74.00	-17.68	Peak	HORIZONTAL
4	2390.00	13.44	27.89	4.80	46.13	54.00	-7.87	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11B 2462 ANT2

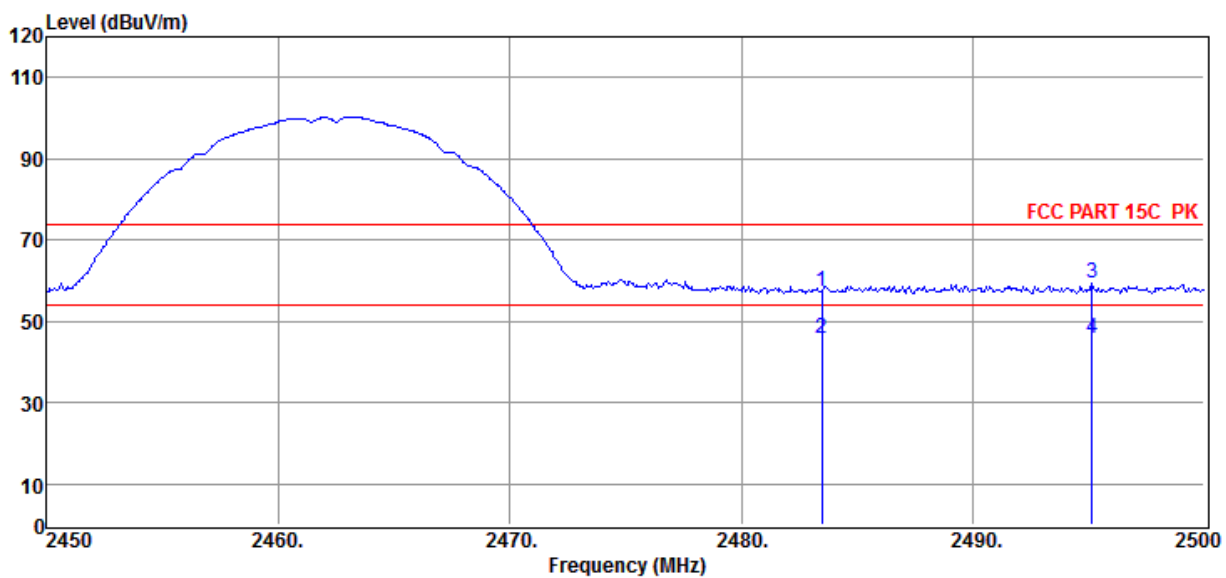

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.60	27.98	4.90	57.48	74.00	-16.52	Peak	VERTICAL
2	2483.50	12.79	27.98	4.90	45.67	54.00	-8.33	Average	VERTICAL
3	2495.15	26.55	28.00	4.91	59.46	74.00	-14.54	Peak	VERTICAL
4	2495.15	12.66	28.00	4.91	45.57	54.00	-8.43	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11B 2462 ANT2

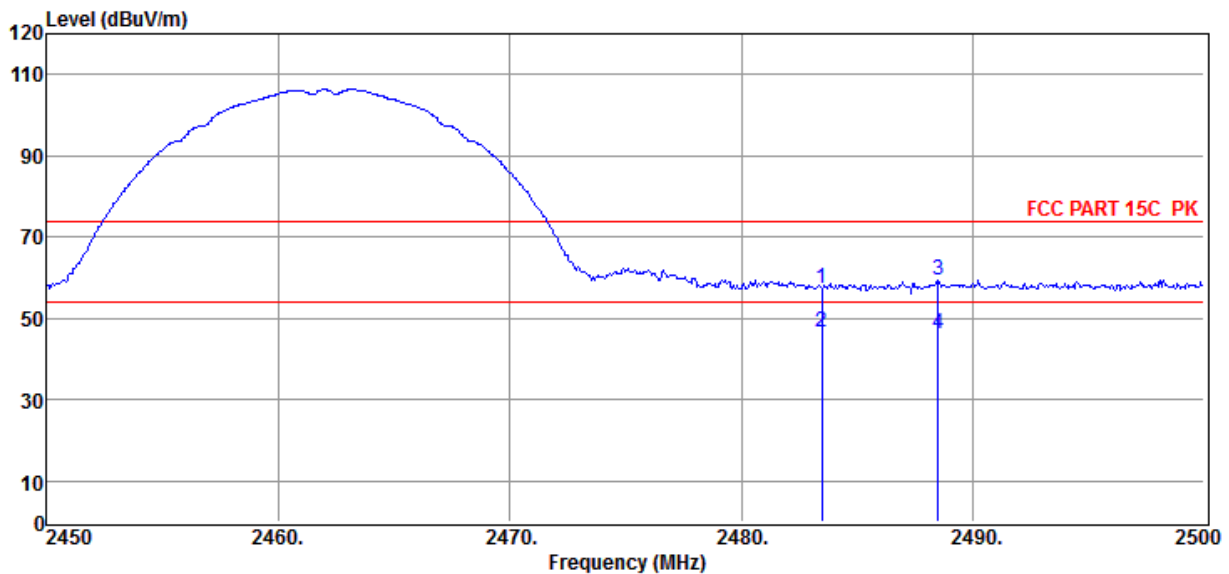

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.47	27.98	4.90	57.35	74.00	-16.65	Peak	HORIZONTAL
2	2483.50	13.67	27.98	4.90	46.55	54.00	-7.45	Average	HORIZONTAL
3	2488.50	26.38	27.99	4.91	59.28	74.00	-14.72	Peak	HORIZONTAL
4	2488.50	13.15	27.99	4.91	46.05	54.00	-7.95	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL
Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11G 2412 ANT1

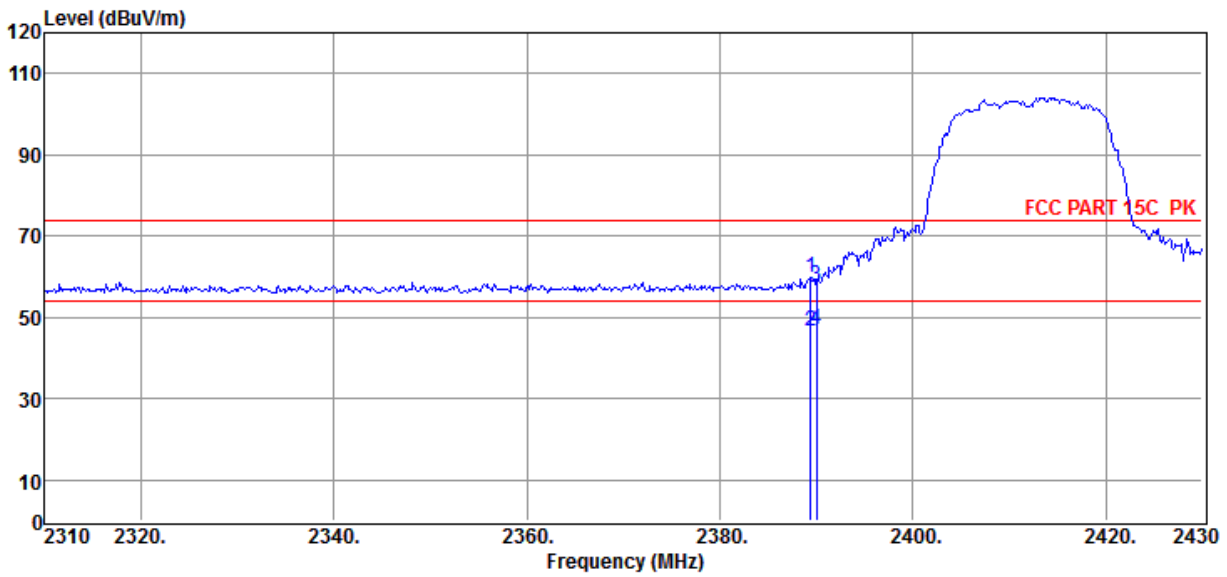

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.44	26.97	27.89	4.80	59.66	74.00	-14.34	Peak	VERTICAL
2	2389.44	14.11	27.89	4.80	46.80	54.00	-7.20	Average	VERTICAL
3	2390.00	24.90	27.89	4.80	57.59	74.00	-16.41	Peak	VERTICAL
4	2390.00	14.24	27.89	4.80	46.93	54.00	-7.07	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11G 2412 ANT1

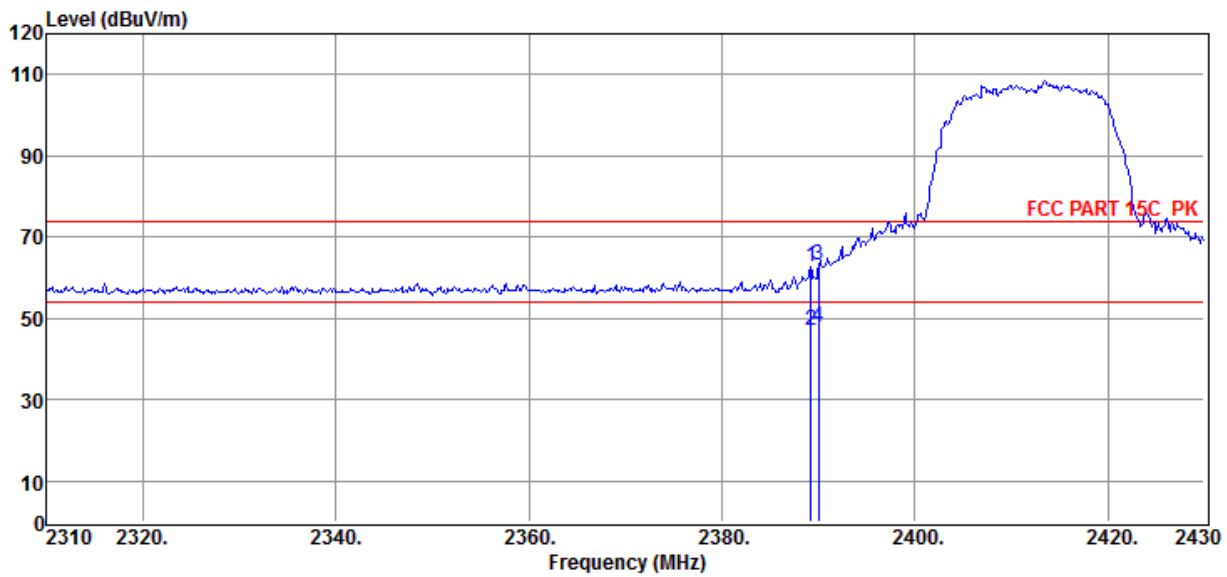

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2389.20	29.87	27.89	4.80	62.56	74.00	-11.44	Peak	HORIZONTAL
2	2389.20	14.32	27.89	4.80	47.01	54.00	-6.99	Average	HORIZONTAL
3	2390.00	30.43	27.89	4.80	63.12	74.00	-10.88	Peak	HORIZONTAL
4	2390.00	14.95	27.89	4.80	47.64	54.00	-6.36	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11G 2462 ANT1

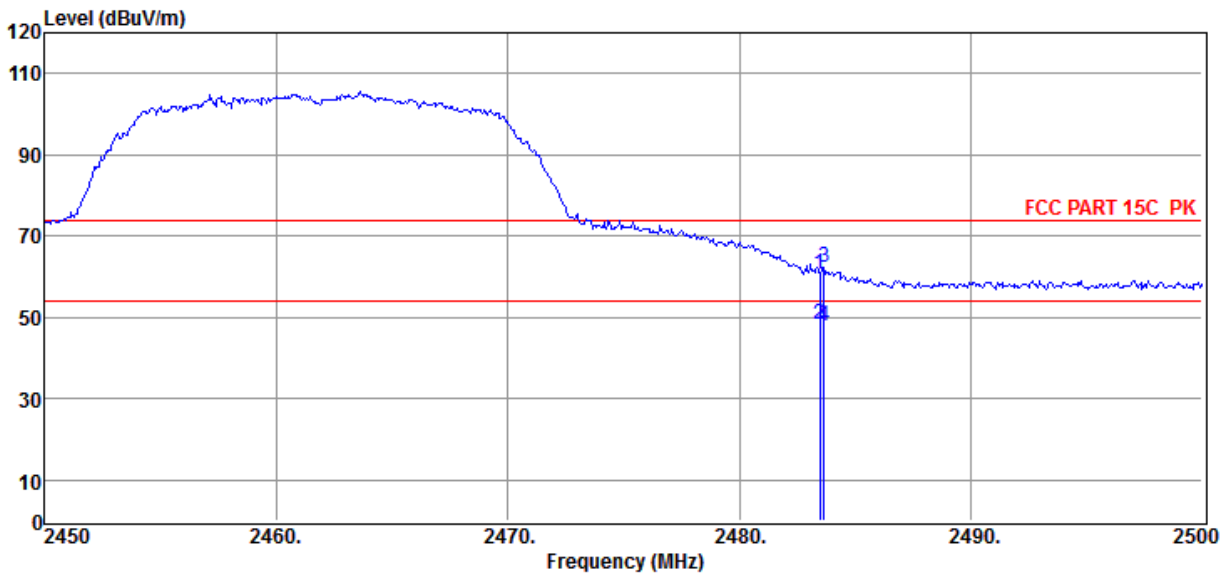

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	27.64	27.98	4.90	60.52	74.00	-13.48	Peak	VERTICAL
2	2483.50	15.31	27.98	4.90	48.19	54.00	-5.81	Average	VERTICAL
3	2483.65	29.19	27.98	4.90	62.07	74.00	-11.93	Peak	VERTICAL
4	2483.65	15.01	27.98	4.90	47.89	54.00	-6.11	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11G 2462 ANT1

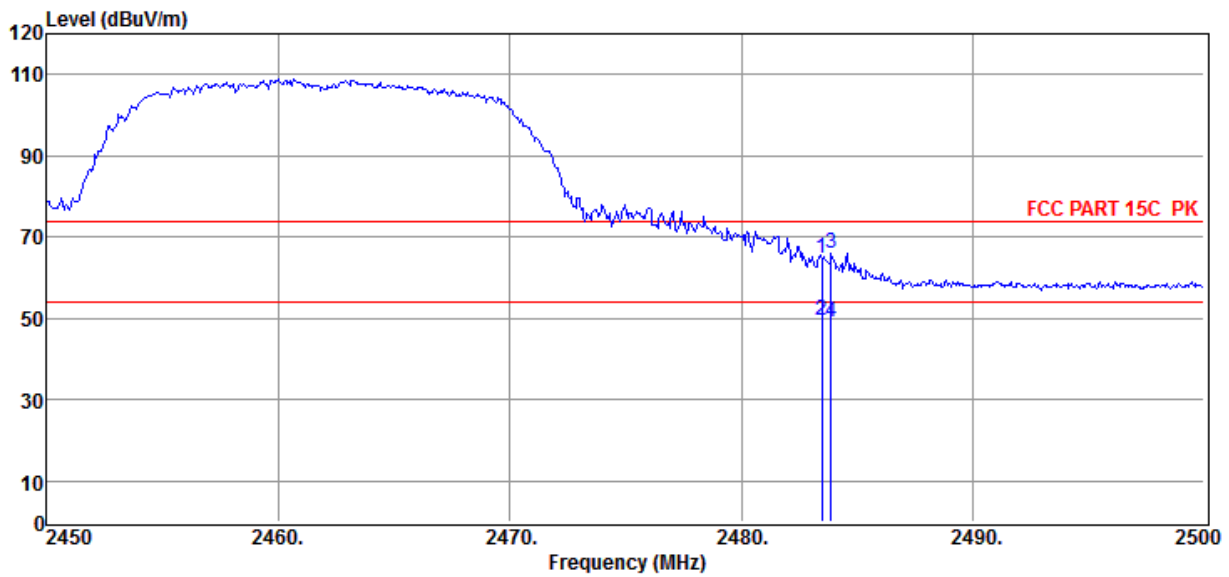

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	31.71	27.98	4.90	64.59	74.00	-9.41	Peak	HORIZONTAL
2	2483.50	16.41	27.98	4.90	49.29	54.00	-4.71	Average	HORIZONTAL
3	2483.90	33.23	27.98	4.90	66.11	74.00	-7.89	Peak	HORIZONTAL
4	2483.90	16.01	27.98	4.90	48.89	54.00	-5.11	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11G 2412 ANT2

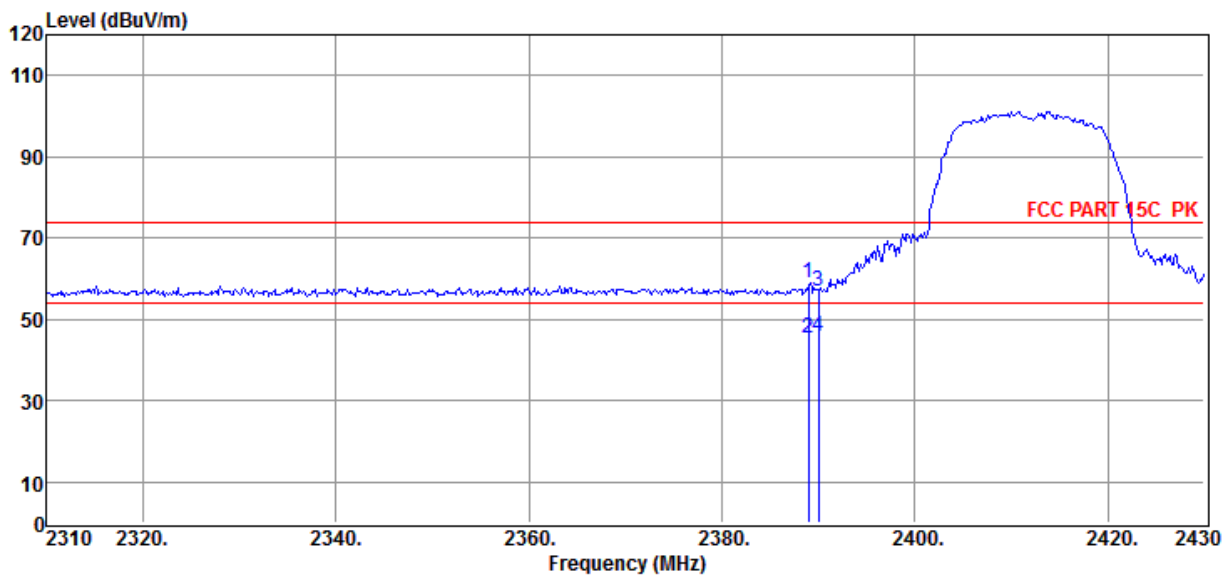

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2389.00	26.28	27.89	4.80	58.97	74.00	-15.03	Peak	VERTICAL
2	2389.00	12.66	27.89	4.80	45.35	54.00	-8.65	Average	VERTICAL
3	2390.00	24.39	27.89	4.80	57.08	74.00	-16.92	Peak	VERTICAL
4	2390.00	13.02	27.89	4.80	45.71	54.00	-8.29	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL
Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11G 2412 ANT2

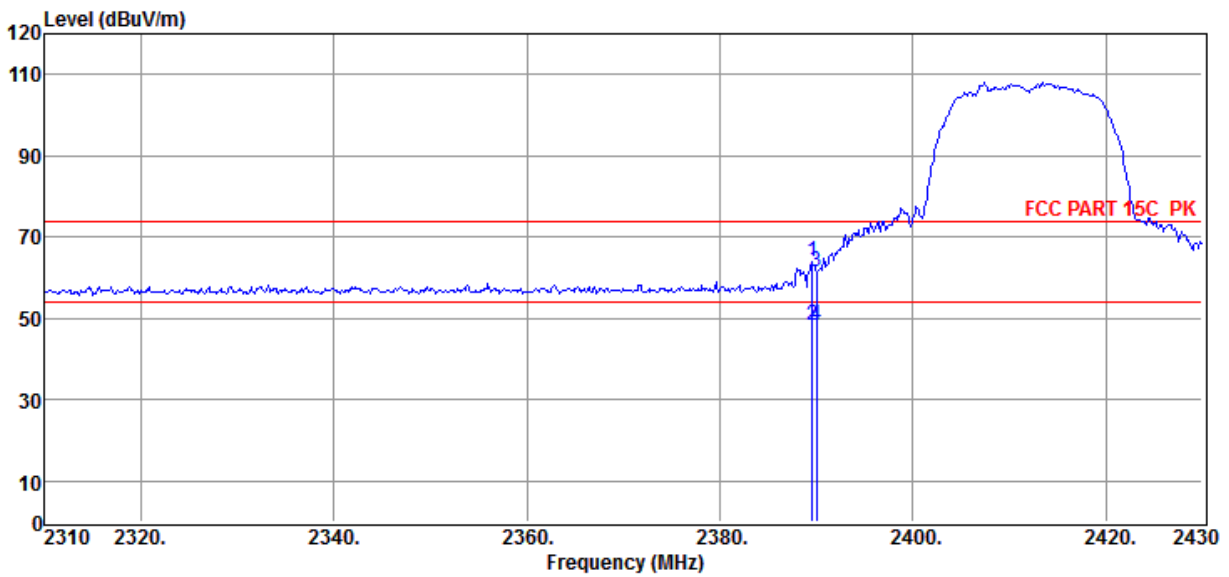

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.56	31.14	27.89	4.80	63.83	74.00	-10.17	Peak	HORIZONTAL
2	2389.56	15.37	27.89	4.80	48.06	54.00	-5.94	Average	HORIZONTAL
3	2390.00	28.94	27.89	4.80	61.63	74.00	-12.37	Peak	HORIZONTAL
4	2390.00	15.62	27.89	4.80	48.31	54.00	-5.69	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11G 2462 ANT2

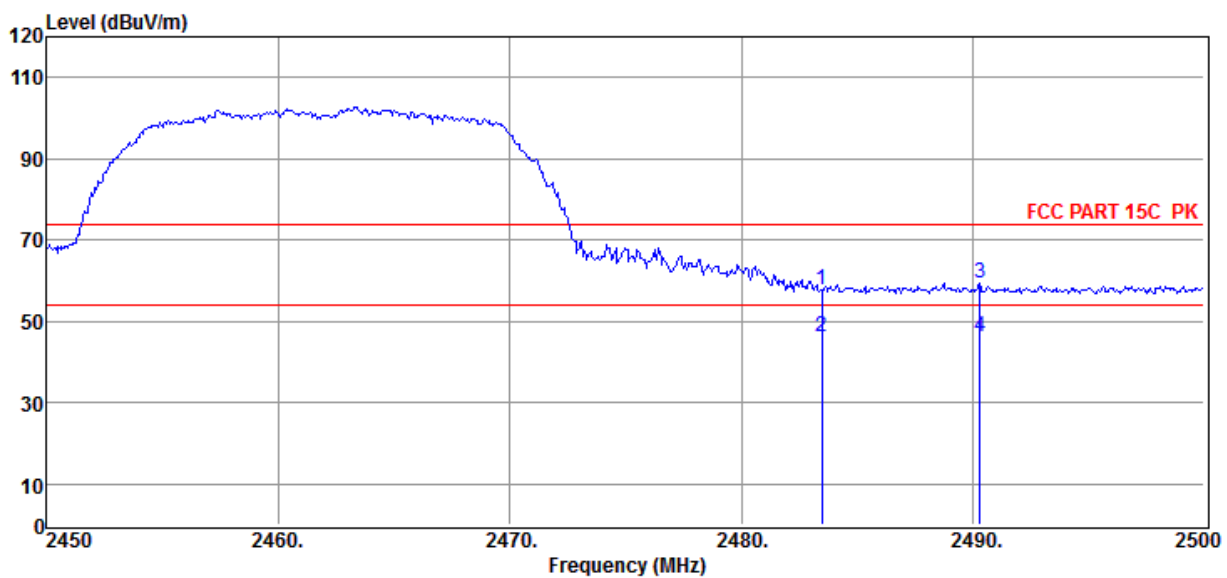

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.88	27.98	4.90	57.76	74.00	-16.24	Peak	VERTICAL
2	2483.50	13.37	27.98	4.90	46.25	54.00	-7.75	Average	VERTICAL
3	2490.30	26.66	27.99	4.91	59.56	74.00	-14.44	Peak	VERTICAL
4	2490.30	13.22	27.99	4.91	46.12	54.00	-7.88	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-22

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11G 2462 ANT2

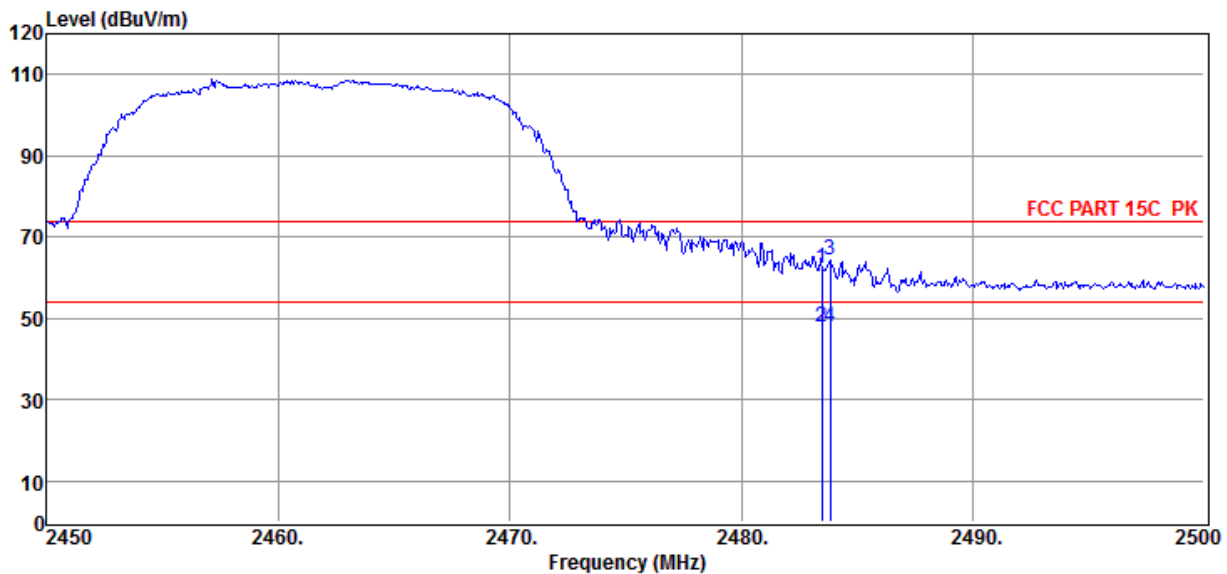

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	29.19	27.98	4.90	62.07	74.00	-11.93	Peak	HORIZONTAL
2	2483.50	15.13	27.98	4.90	48.01	54.00	-5.99	Average	HORIZONTAL
3	2483.85	31.34	27.98	4.90	64.22	74.00	-9.78	Peak	HORIZONTAL
4	2483.85	14.89	27.98	4.90	47.77	54.00	-6.23	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11N20 2412 MIMO

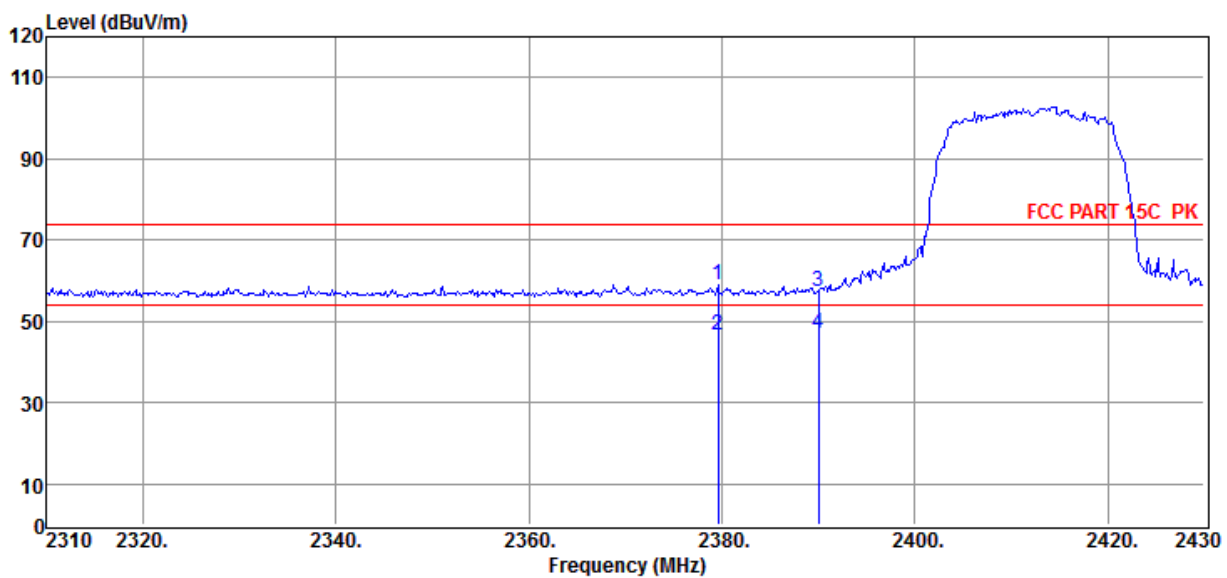

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2379.60	26.38	27.88	4.79	59.05	74.00	-14.95	Peak	VERTICAL
2	2379.60	13.77	27.88	4.79	46.44	54.00	-7.56	Average	VERTICAL
3	2390.00	24.71	27.89	4.80	57.40	74.00	-16.60	Peak	VERTICAL
4	2390.00	14.38	27.89	4.80	47.07	54.00	-6.93	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11N20 2412 MIMO

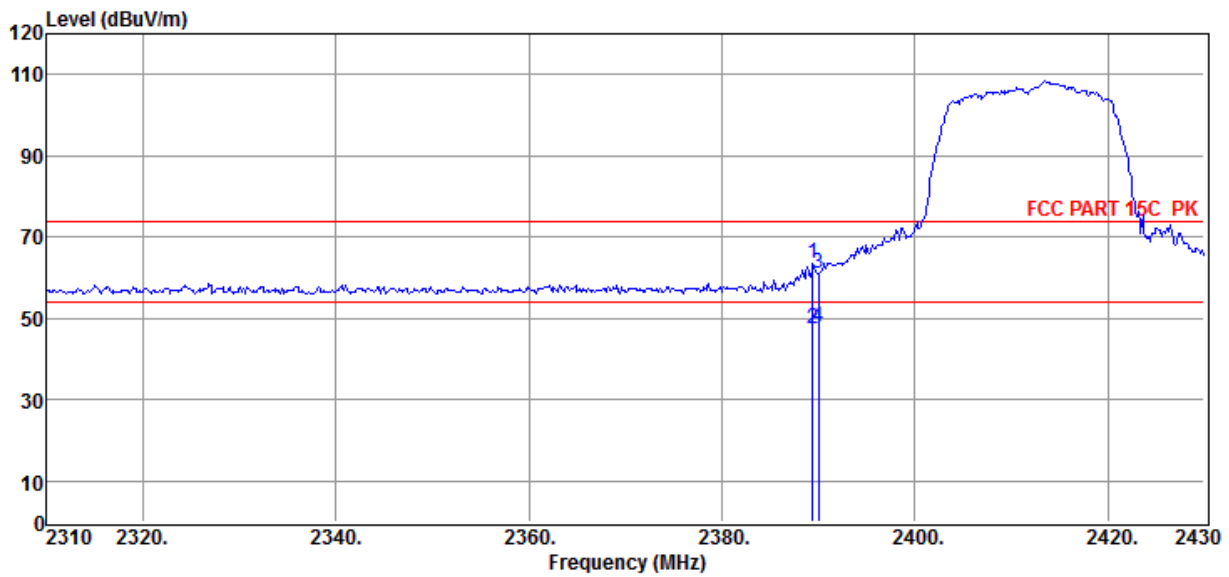

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.44	30.78	27.89	4.80	63.47	74.00	-10.53	Peak	HORIZONTAL
2	2389.44	14.68	27.89	4.80	47.37	54.00	-6.63	Average	HORIZONTAL
3	2390.00	28.48	27.89	4.80	61.17	74.00	-12.83	Peak	HORIZONTAL
4	2390.00	15.24	27.89	4.80	47.93	54.00	-6.07	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11N20 2462 MIMO

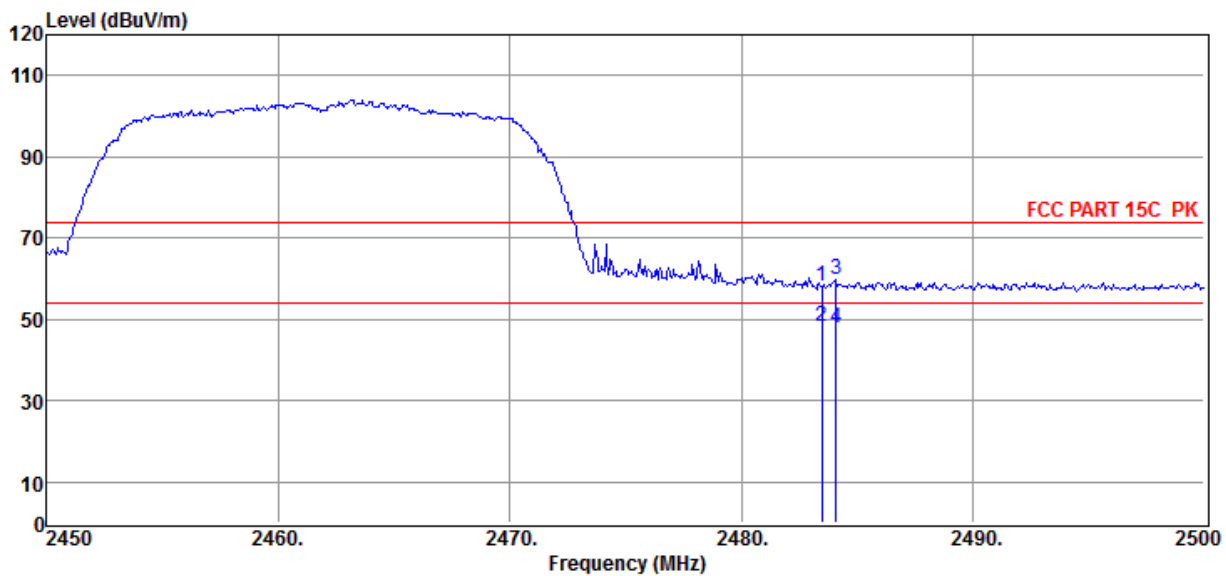

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	25.44	27.98	4.90	58.32	74.00	-15.68	Peak	VERTICAL
2	2483.50	15.33	27.98	4.90	48.21	54.00	-5.79	Average	VERTICAL
3	2484.10	26.75	27.98	4.90	59.63	74.00	-14.37	Peak	VERTICAL
4	2484.10	15.02	27.98	4.90	47.90	54.00	-6.10	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-05-30
EUT : SOUNDBAR
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11N20 2462 MIMO

D:\2021 RE2# Report Data\Q21050705-2E JBL Bar5.1\FCC WIFI ABOVE 1G .EM6
Tested By : Jacky
Model Number : BAR 5.1 CNTR
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

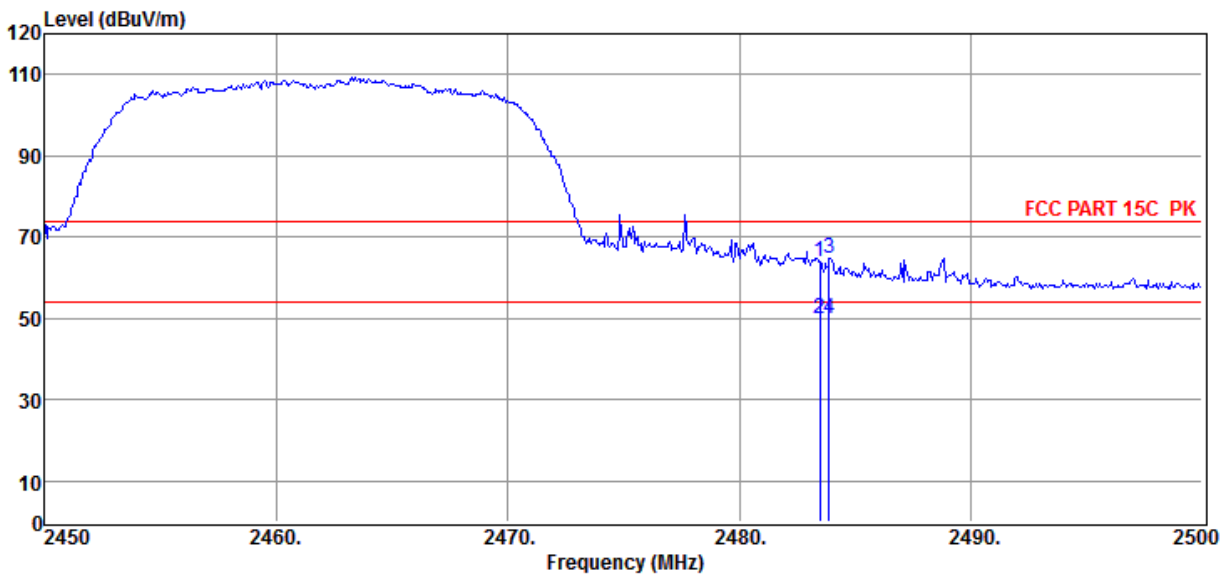

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	31.03	27.98	4.90	63.91	74.00	-10.09	Peak	HORIZONTAL
2	2483.50	17.15	27.98	4.90	50.03	54.00	-3.97	Average	HORIZONTAL
3	2483.90	31.98	27.98	4.90	64.86	74.00	-9.14	Peak	HORIZONTAL
4	2483.90	17.01	27.98	4.90	49.89	54.00	-4.11	Average	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL
Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11N40 2422 MIMO

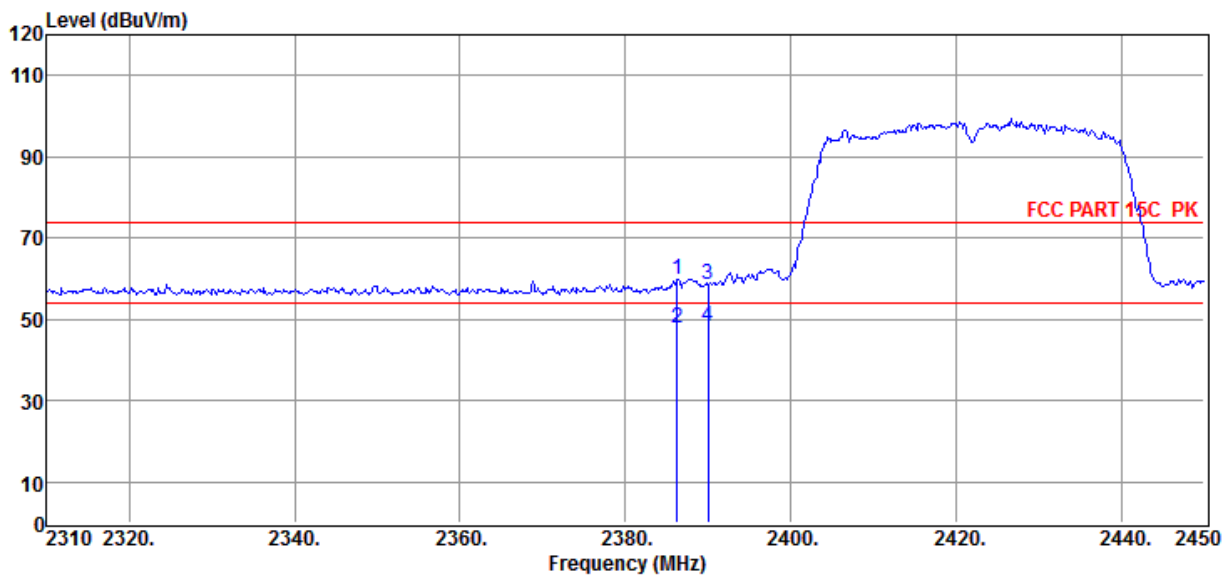

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2386.30	27.25	27.89	4.79	59.93	74.00	-14.07	Peak	VERTICAL
2	2386.30	15.32	27.89	4.79	48.00	54.00	-6.00	Average	VERTICAL
3	2390.00	25.81	27.89	4.80	58.50	74.00	-15.50	Peak	VERTICAL
4	2390.00	15.69	27.89	4.80	48.38	54.00	-5.62	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11N40 2422 MIMO

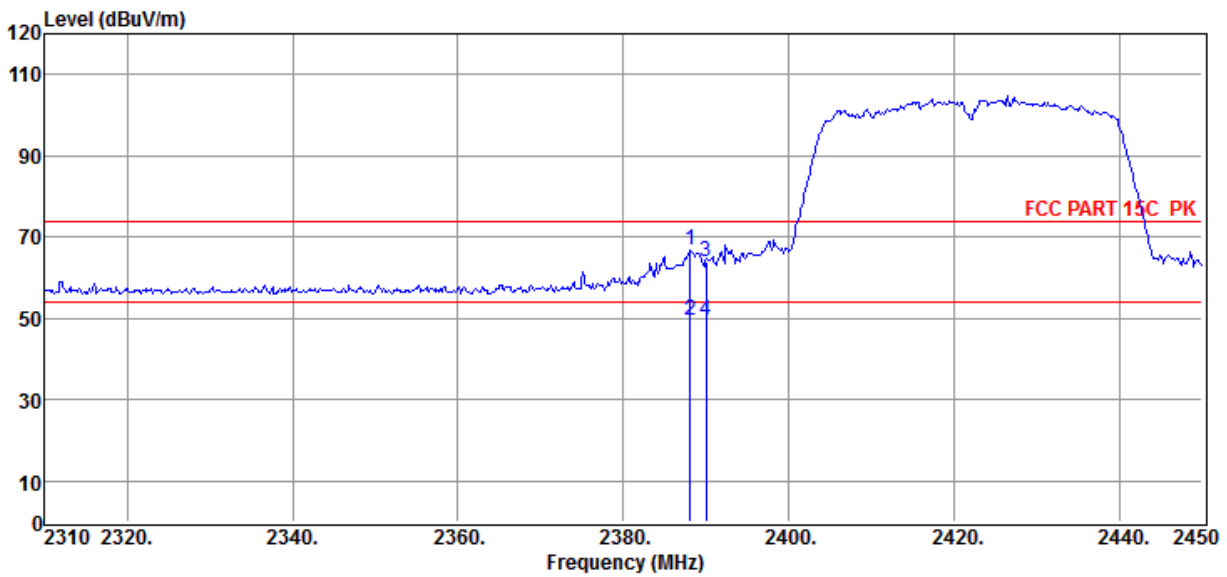

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.12	34.13	27.89	4.80	66.82	74.00	-7.18	Peak	HORIZONTAL
2	2388.12	16.79	27.89	4.80	49.48	54.00	-4.52	Average	HORIZONTAL
3	2390.00	31.04	27.89	4.80	63.73	74.00	-10.27	Peak	HORIZONTAL
4	2390.00	16.88	27.89	4.80	49.57	54.00	-4.43	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL
Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/VERTICAL

Memo : 11N40 2452 MIMO

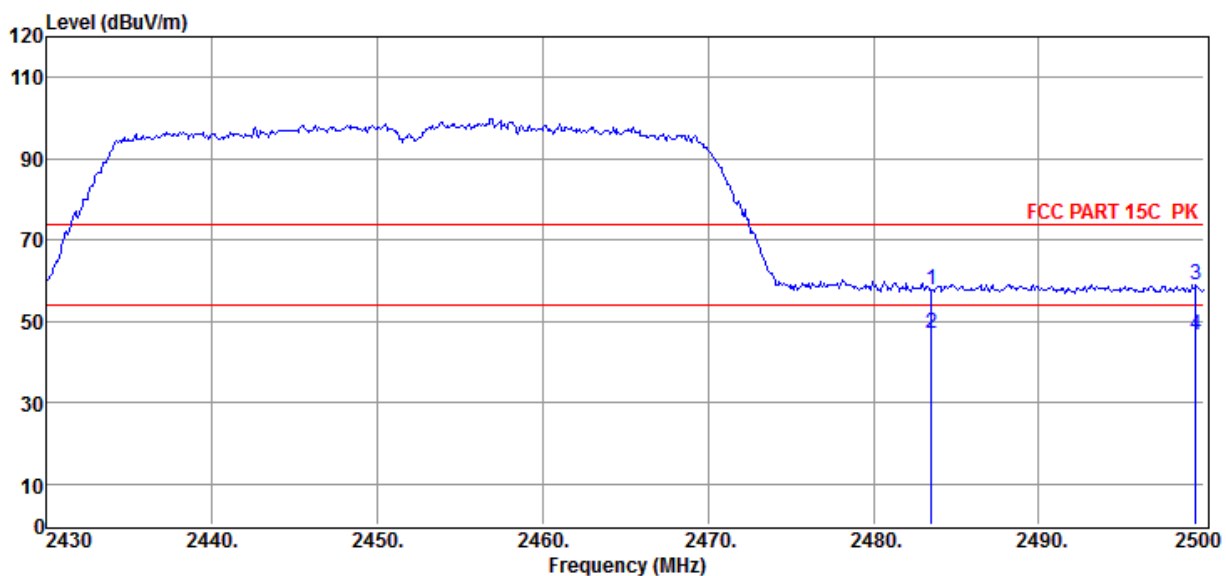

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.74	27.98	4.90	57.62	74.00	-16.38	Peak	VERTICAL
2	2483.50	14.19	27.98	4.90	47.07	54.00	-6.93	Average	VERTICAL
3	2499.51	26.24	28.00	4.92	59.16	74.00	-14.84	Peak	VERTICAL
4	2499.51	13.88	28.00	4.92	46.80	54.00	-7.20	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21050705-2E JBL

Bar5.1\FCC WIFI ABOVE 1G .EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR


Model Number : BAR 5.1 CNTR

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020
BBHA9120D/3m/HORIZONTAL

Memo : 11N40 2452 MIMO

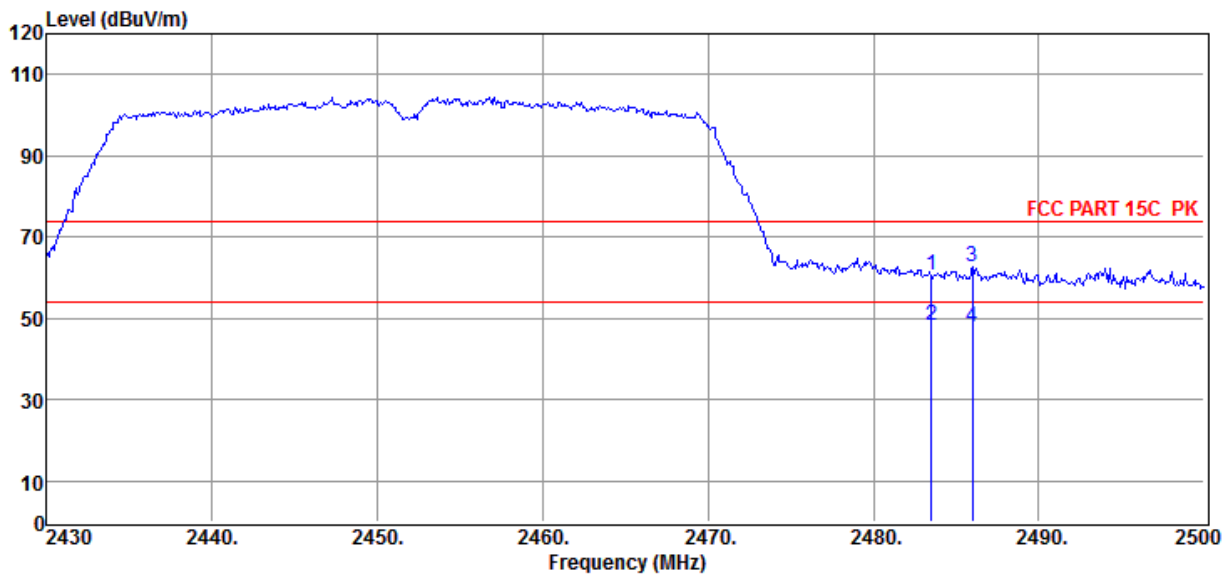

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	27.73	27.98	4.90	60.61	74.00	-13.39	Peak	HORIZONTAL
2	2483.50	15.45	27.98	4.90	48.33	54.00	-5.67	Average	HORIZONTAL
3	2486.00	29.77	27.99	4.90	62.66	74.00	-11.34	Peak	HORIZONTAL
4	2486.00	15.00	27.99	4.90	47.89	54.00	-6.11	Average	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

10. Power Line Conducted Emission

10.1. Block diagram of test setup

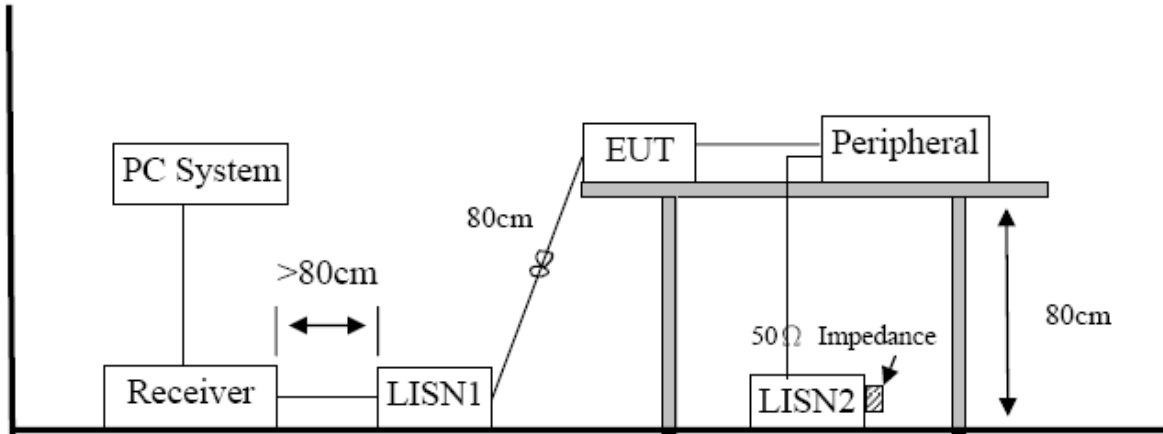

10.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

☉ All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

10.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means peak detection; "----" means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case (AC 120V/60Hz).

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21050705-2E
BAR5.1\20210521.EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR

Model Number : BAR 5.1 CNTR


Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : TEMP:24.8°C, RH:53.8%, BP:101.4kPa

LISN : 2020 ENV 216 1#/NEUTRAL

Memo :

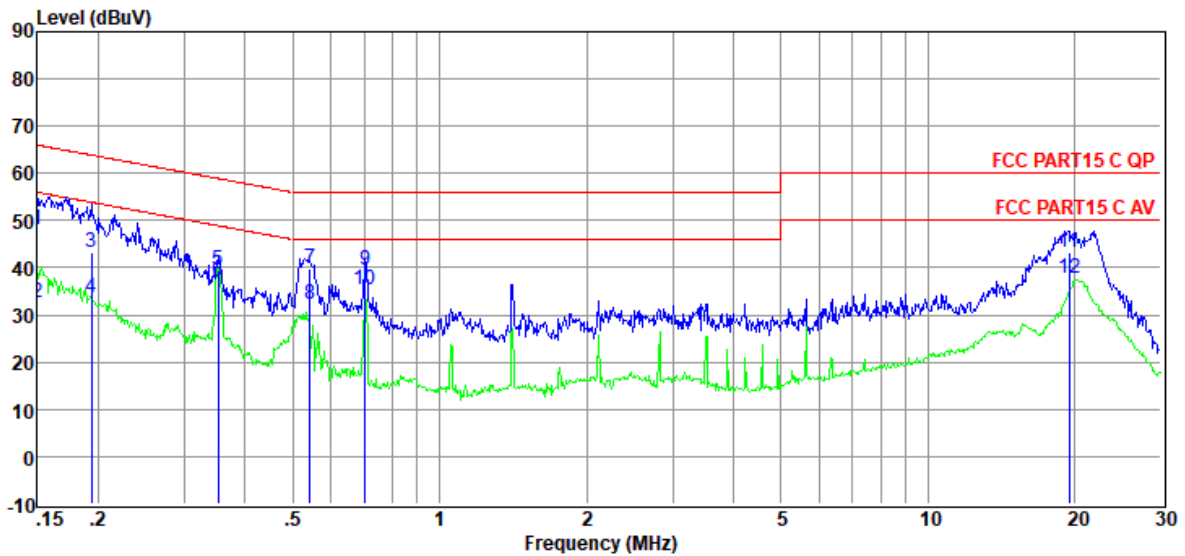

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	28.83	9.38	0.02	9.86	48.09	66.00	-17.91	QP	NEUTRAL
2	0.15	13.26	9.38	0.02	9.86	32.52	56.00	-23.48	Average	NEUTRAL
3	0.19	23.87	9.37	0.02	9.86	43.12	63.89	-20.77	QP	NEUTRAL
4	0.19	14.26	9.37	0.02	9.86	33.51	53.89	-20.38	Average	NEUTRAL
5	0.35	20.28	9.38	0.02	9.86	39.54	58.91	-19.37	QP	NEUTRAL
6	0.35	17.81	9.38	0.02	9.86	37.07	48.91	-11.84	Average	NEUTRAL
7	0.54	20.65	9.39	0.02	9.86	39.92	56.00	-16.08	QP	NEUTRAL
8	0.54	12.94	9.39	0.02	9.86	32.21	46.00	-13.79	Average	NEUTRAL
9	0.70	20.36	9.39	0.03	9.86	39.64	56.00	-16.36	QP	NEUTRAL
10	0.70	16.14	9.39	0.03	9.86	35.42	46.00	-10.58	Average	NEUTRAL
11	19.43	23.26	9.81	0.16	9.94	43.17	60.00	-16.83	QP	NEUTRAL
12	19.43	17.77	9.81	0.16	9.94	37.68	50.00	-12.32	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21050705-2E

BAR5.1\20210521.EM6

Test Date : 2021-05-30

Tested By : Jacky

EUT : SOUNDBAR

Model Number : BAR 5.1 CNTR


Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Condition : TEMP:24.8°C, RH:53.8%, BP:101.4kPa

LISN : 2020 ENV 216 1#/LINE

Memo :

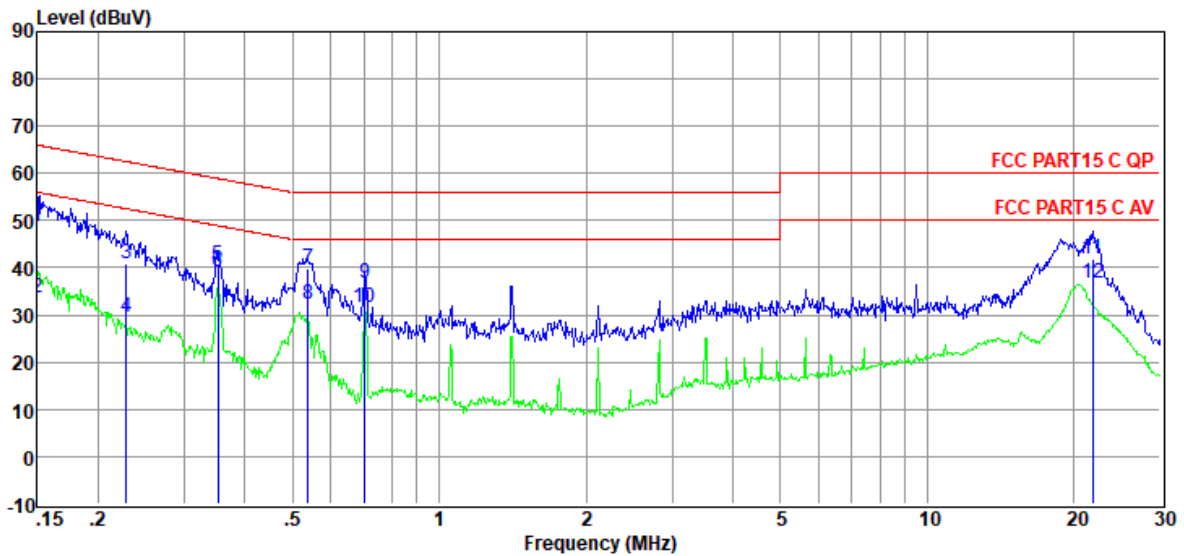

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	29.65	9.39	0.02	9.86	48.92	66.00	-17.08	QP	LINE
2	0.15	14.34	9.39	0.02	9.86	33.61	56.00	-22.39	Average	LINE
3	0.23	21.73	9.40	0.02	9.86	41.01	62.52	-21.51	QP	LINE
4	0.23	10.25	9.40	0.02	9.86	29.53	52.52	-22.99	Average	LINE
5	0.35	21.21	9.41	0.02	9.86	40.50	58.91	-18.41	QP	LINE
6	0.35	19.81	9.41	0.02	9.86	39.10	48.91	-9.81	Average	LINE
7	0.54	20.56	9.41	0.02	9.86	39.85	56.00	-16.15	QP	LINE
8	0.54	12.87	9.41	0.02	9.86	32.16	46.00	-13.84	Average	LINE
9	0.70	17.43	9.42	0.03	9.86	36.74	56.00	-19.26	QP	LINE
10	0.70	12.35	9.42	0.03	9.86	31.66	46.00	-14.34	Average	LINE
11	21.83	21.83	9.78	0.17	9.95	41.73	60.00	-18.27	QP	LINE
12	21.83	16.70	9.78	0.17	9.95	36.60	50.00	-13.40	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antennas used for this product are integrated antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 5.69 dBi.