

## FCC AND IC CERTIFICATION TEST REPORT

### FOR

|                             |   |                                                               |
|-----------------------------|---|---------------------------------------------------------------|
| <b>Applicant</b>            | : | Harman International Industries, Inc.                         |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329,<br>UNITED STATES |
| <b>Equipment under Test</b> | : | Portable Bluetooth Speaker                                    |
| <b>Model No.</b>            | : | ESQUIRE MINI 2                                                |
| <b>Trade Mark</b>           | : | harman/kardon                                                 |
| <b>FCC ID</b>               | : | APIESQMINI2                                                   |
| <b>IC</b>                   | : | 6132A-ESQMINI2                                                |
| <b>Manufacturer</b>         | : | Harman International Industries, Inc.                         |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329,<br>UNITED STATES |

**Issued By: Dongguan Dongdian Testing Service Co., Ltd.**

**Add:** No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan  
City, Guangdong Province, China, 523808

**Tel:** +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

# REPORT

## TABLE OF CONTENTS

|      |                                                  |    |
|------|--------------------------------------------------|----|
|      | Test report declares.....                        | 4  |
| 1.   | Summary of test results .....                    | 6  |
| 2.   | General test information.....                    | 7  |
| 2.1. | Description of EUT .....                         | 7  |
| 2.2. | Accessories of EUT .....                         | 7  |
| 2.3. | Assistant equipment used for test.....           | 7  |
| 2.4. | Block diagram of EUT configuration for test..... | 8  |
| 2.5. | Test environment conditions .....                | 8  |
| 2.6. | Deviations of test standard .....                | 8  |
| 2.7. | Test laboratory .....                            | 8  |
| 2.8. | Measurement uncertainty .....                    | 9  |
| 3.   | Equipment used during test.....                  | 10 |
| 4.   | 6dB Bandwidth and 99% Bandwidth .....            | 11 |
| 4.1. | Block diagram of test setup .....                | 11 |
| 4.2. | Limits .....                                     | 11 |
| 4.3. | Test Procedure.....                              | 11 |
| 4.4. | Test Result .....                                | 11 |
| 4.5. | Original test data .....                         | 12 |
| 5.   | Maximum Peak Output Power .....                  | 13 |
| 5.1. | Block diagram of test setup .....                | 13 |
| 5.2. | Limits .....                                     | 13 |
| 5.3. | Test Procedure.....                              | 13 |
| 5.4. | Test Result .....                                | 13 |
| 5.5. | Original test data .....                         | 14 |
| 6.   | Power Spectral Density.....                      | 15 |
| 6.1. | Block diagram of test setup .....                | 15 |
| 6.2. | Limits .....                                     | 15 |
| 6.3. | Test Procedure.....                              | 15 |
| 6.4. | Test Result .....                                | 15 |
| 6.5. | Original test data .....                         | 16 |
| 7.   | Band Edge Compliance (conducted method) .....    | 17 |
| 7.1. | Block diagram of test setup .....                | 17 |
| 7.2. | Limits .....                                     | 17 |
| 7.3. | Test Procedure.....                              | 17 |
| 7.4. | Test Result .....                                | 18 |
| 7.5. | Original test data .....                         | 18 |

|       |                                             |    |
|-------|---------------------------------------------|----|
| 8.    | Radiated emission .....                     | 19 |
| 8.1.  | Block diagram of test setup .....           | 19 |
| 8.2.  | Limit.....                                  | 20 |
| 8.3.  | Test Procedure.....                         | 21 |
| 8.4.  | Test result.....                            | 23 |
| 9.    | RF Conducted Spurious Emissions.....        | 27 |
| 9.1.  | Block diagram of test setup .....           | 27 |
| 9.2.  | Limits .....                                | 27 |
| 9.3.  | Test Procedure.....                         | 27 |
| 9.4.  | Test Result .....                           | 28 |
| 9.5.  | Original test data .....                    | 28 |
| 10.   | Emission in restricted frequency bands..... | 32 |
| 10.1. | Block diagram of test setup .....           | 32 |
| 10.2. | Limit.....                                  | 32 |
| 10.3. | Test Procedure.....                         | 32 |
| 10.4. | Test result.....                            | 32 |
| 11.   | Power Line Conducted Emission.....          | 37 |
| 11.1. | Block diagram of test setup .....           | 37 |
| 11.2. | Power Line Conducted Emission Limits .....  | 37 |
| 11.3. | Test Procedure.....                         | 37 |
| 11.4. | Test Result .....                           | 38 |
| 12.   | Antenna Requirements .....                  | 41 |
| 12.1. | Limit.....                                  | 41 |
| 12.2. | Result .....                                | 41 |

## TEST REPORT DECLARE

|                             |   |                                                            |
|-----------------------------|---|------------------------------------------------------------|
| <b>Applicant</b>            | : | Harman International Industries, Inc.                      |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |
| <b>Equipment under Test</b> | : | Portable Bluetooth Speaker                                 |
| <b>Model No.</b>            | : | ESQUIRE MINI 2                                             |
| <b>Trade mark</b>           | : | harman/kardon                                              |
| <b>Manufacturer</b>         | : | Harman International Industries, Inc.                      |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |

**Test Standard Used:**

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

**Test procedure used:**

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018.

**We Declare:**

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.**

|                         |                                 |                      |                                                                 |
|-------------------------|---------------------------------|----------------------|-----------------------------------------------------------------|
| <b>Report No:</b>       | DDT-R18092604-1E5               |                      |                                                                 |
| <b>Date of Receipt:</b> | Jul. 26, 2018 and Sep. 30, 2018 | <b>Date of Test:</b> | Jul. 26, 2018 ~ Aug. 05, 2018 and Sep. 30, 2018 ~ Oct. 16, 2018 |

**Prepared By:**

*Sam Li*

**Sam Li/Engineer**

**Approved By:**



**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

## Revision history

| Rev. | Revisions                                                               | Issue Date    | Revised By |
|------|-------------------------------------------------------------------------|---------------|------------|
| ---  | Initial issue                                                           | Aug. 06, 2018 | Ella Gong  |
| V1.0 | Changed a new PCB board based on the original report: DDT-R18050805-1E3 | Oct. 16, 2018 | Sam Li     |

## 1. Summary of test results

| The EUT have been tested according to the applicable standards as referenced below.                                                                                                                                                                                                                                              |                                                                                                       |         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------|
| Description of Test Item                                                                                                                                                                                                                                                                                                         | Standard                                                                                              | Results |
| 6dB Bandwidth and 99% Bandwidth                                                                                                                                                                                                                                                                                                  | FCC Part 15: 15.247<br>ANSI C63.10:2013<br>RSS-247 Issue 2                                            | PASS    |
| Peak Output Power                                                                                                                                                                                                                                                                                                                | FCC Part 15: 15.247<br>ANSI C63.10:2013<br>RSS-247 Issue 2                                            | PASS    |
| Power Spectral Density                                                                                                                                                                                                                                                                                                           | FCC Part 15:15.247<br>ANSI C63.10:2013<br>RSS-247 Issue 2                                             | PASS    |
| Band Edge Compliance<br>(conducted method)                                                                                                                                                                                                                                                                                       | FCC Part 15: 15.209<br>FCC Part 15: 15.247<br>ANSI C63.10: 2013<br>RSS-247 Issue 2<br>RSS-Gen Issue 5 | PASS    |
| Radiation Emission                                                                                                                                                                                                                                                                                                               | FCC Part 15: 15.247<br>ANSI C63.10:2013<br>RSS-247 Issue 2<br>RSS-Gen Issue 5                         | PASS    |
| RF Conducted Spurious Emissions                                                                                                                                                                                                                                                                                                  | FCC Part 15: 15.209<br>FCC Part 15: 15.247<br>ANSI C63.10: 2013<br>RSS-247 Issue 2<br>RSS-Gen Issue 5 | PASS    |
| Emission in restricted frequency bands                                                                                                                                                                                                                                                                                           | FCC Part 15: 15.209<br>FCC Part 15: 15.247<br>ANSI C63.10: 2013<br>RSS-247 Issue 2<br>RSS-Gen Issue 5 | PASS    |
| Power Line Conducted Emission                                                                                                                                                                                                                                                                                                    | FCC Part 15: 15.207<br>ANSI C63.10: 2013<br>RSS-Gen Issue 5                                           | PASS    |
| Antenna requirement                                                                                                                                                                                                                                                                                                              | FCC Part 15: 15.203<br>RSS-Gen Issue 5                                                                | PASS    |
| Note: This report changed a new PCB board based on the original report:<br>DDT-R18050805-1E3, this change doesn't influence the RF performance, so only radiated<br>emission (below 1GHz) and Power Line Conducted Emissions were tested and recorded in this<br>report, and the original test data was retained in this report. |                                                                                                       |         |

## 2. General test information

### 2.1. Description of EUT

|                          |                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------|
| EUT* Name                | : Portable Bluetooth Speaker                                                             |
| Model Number             | : ESQUIRE MINI 2                                                                         |
| EUT function description | : Please reference user manual of this device                                            |
| Power supply             | : DC 5V from external AC Adapter<br>Lithium-ion polymer (3.8V/ 2200mAh) built-in battery |
| Radio Specification      | : Bluetooth V4.2                                                                         |
| Operation frequency      | : 2402MHz -2480MHz                                                                       |
| Modulation               | : GFSK,                                                                                  |
| Data rate                | : 1Mbps                                                                                  |
| Antenna Type             | : Dedicated FPC antenna, maximum PK gain: 3.51dBi                                        |
| Sample Type              | : Series production                                                                      |

Note: EUT is the ab. of equipment under test.

| Channel information |           |         |           |         |           |
|---------------------|-----------|---------|-----------|---------|-----------|
| Channel             | Frequency | Channel | Frequency | Channel | Frequency |
| 0                   | 2402MHz   | 14      | 2430MHz   | 28      | 2458MHz   |
| 1                   | 2404MHz   | 15      | 2432MHz   | 29      | 2460MHz   |
| 2                   | 2406MHz   | 16      | 2434MHz   | 30      | 2462MHz   |
| 3                   | 2408MHz   | 17      | 2436MHz   | 31      | 2464MHz   |
| 4                   | 2410MHz   | 18      | 2438MHz   | 32      | 2466MHz   |
| 5                   | 2412MHz   | 19      | 2440MHz   | 33      | 2468MHz   |
| 6                   | 2414MHz   | 20      | 2442MHz   | 34      | 2470MHz   |
| 7                   | 2416MHz   | 21      | 2444MHz   | 35      | 2472MHz   |
| 8                   | 2418MHz   | 22      | 2446MHz   | 36      | 2474MHz   |
| 9                   | 2420MHz   | 23      | 2448MHz   | 37      | 2476MHz   |
| 10                  | 2422MHz   | 24      | 2450MHz   | 38      | 2478MHz   |
| 11                  | 2424MHz   | 25      | 2452MHz   | 39      | 2480MHz   |
| 12                  | 2426MHz   | 26      | 2454MHz   |         |           |
| 13                  | 2428MHz   | 27      | 2456MHz   |         |           |


### 2.2. Accessories of EUT

| Description of Accessories | Manufacturer | Model number | Serial No. | Other                    |
|----------------------------|--------------|--------------|------------|--------------------------|
| USB cable                  | Harman       | N/A          | N/A        | Length: 0.8m, unshielded |

### 2.3. Assistant equipment used for test

| Assistant equipment | Manufacturer | Model number  | EMC Compliance | SN                                                           |
|---------------------|--------------|---------------|----------------|--------------------------------------------------------------|
| Notebook            | DELL         | Latitude D610 | FCC DOC        | 00045-534-136-300                                            |
| AC Adapter          | HUAWEI       | HW-050450C00  | N/A            | Input: 100-240V~50/60Hz, Output: 5V/2A or 4.5V/5A or 5V/4.5A |

## 2.4. Block diagram of EUT configuration for test



Test software: BQB. EXE

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table:

| Tested mode, channel, information |         |                 |
|-----------------------------------|---------|-----------------|
| Mode                              | Channel | Frequency (MHz) |
| GFSK                              | CH0     | 2402            |
|                                   | CH19    | 2440            |
|                                   | CH39    | 2480            |

## 2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |           |
|--------------------|-----------|
| Temperature range: | 21-25°C   |
| Humidity range:    | 40-75%    |
| Pressure range:    | 86-106kPa |

## 2.6. Deviations of test standard

No Deviation.

## 2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com)

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1



## 2.8. Measurement uncertainty


| Test Item                                                                                                                                     | Uncertainty                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| Bandwidth                                                                                                                                     | 1.1%                                         |
| Peak Output Power (Conducted) (Spectrum analyzer)                                                                                             | 0.86dB (10MHz $\leq$ f < 3.6GHz);            |
|                                                                                                                                               | 1.38dB (3.6GHz $\leq$ f < 8GHz)              |
| Peak Output Power (Conducted) (Power Sensor)                                                                                                  | 0.74dB                                       |
| Power Spectral Density                                                                                                                        | 0.74dB (10MHz $\leq$ f < 3.6GHz);            |
|                                                                                                                                               | 1.38dB (3.6GHz $\leq$ f < 8GHz)              |
| Frequencies Stability                                                                                                                         | $6.7 \times 10^{-8}$ (Antenna couple method) |
|                                                                                                                                               | $5.5 \times 10^{-8}$ (Conducted method)      |
| Conducted spurious emissions                                                                                                                  | 0.86dB (10MHz $\leq$ f < 3.6GHz);            |
|                                                                                                                                               | 1.40dB (3.6GHz $\leq$ f < 8GHz)              |
|                                                                                                                                               | 1.66dB (8GHz $\leq$ f < 22GHz)               |
| Uncertainty for radio frequency (RBW<20kHz)                                                                                                   | $3 \times 10^{-8}$                           |
| Temperature                                                                                                                                   | 0.4℃                                         |
| Humidity                                                                                                                                      | 2%                                           |
| Uncertainty for Radiation Emission test<br>(30MHz-1GHz)                                                                                       | 4.70dB (Antenna Polarize: V)                 |
|                                                                                                                                               | 4.84dB (Antenna Polarize: H)                 |
| Uncertainty for Radiation Emission test<br>(1GHz-40GHz)                                                                                       | 4.10dB (1-6GHz)                              |
|                                                                                                                                               | 4.40dB (6GHz-18GHz)                          |
|                                                                                                                                               | 3.54dB (18GHz-26GHz)                         |
|                                                                                                                                               | 4.30dB (26GHz-40GHz)                         |
| Uncertainty for Power line conduction emission test                                                                                           | 3.32dB (150kHz-30MHz)                        |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                                              |

### 3. Equipment used during test

| Equipment                                                 | Manufacturer  | Model No.          | Serial No.        | Last Cal.     | Cal. Interval |
|-----------------------------------------------------------|---------------|--------------------|-------------------|---------------|---------------|
| <b>RF Connected Test (Tonscend RF Measurement System)</b> |               |                    |                   |               |               |
| Spectrum analyzer                                         | R&S           | FSU26              | 200071            | Oct. 23, 2017 | 1 Year        |
| Wideband Radio Communication tester                       | R&S           | CMW500             | 117491            | Jun. 29, 2018 | 1 Year        |
| Vector Signal Generator                                   | Agilent       | E8267D             | US49060192        | Oct. 23, 2017 | 1 Year        |
| Vector Signal Generator                                   | Agilent       | N5182A             | MY48180737        | Jun. 29, 2018 | 1 Year        |
| Power Sensor                                              | Agilent       | U2021XA            | MY55150010        | Oct. 21, 2017 | 1 Year        |
| Power Sensor                                              | Agilent       | U2021XA            | MY55150011        | Oct. 23, 2017 | 1 Year        |
| DC Power Source                                           | MATRIS        | MPS-3005L-3        | D813058W          | Aug. 18, 2018 | 1 Year        |
| Attenuator                                                | Mini-Circuits | BW-S10W2           | 101109            | Aug. 18, 2018 | 1 Year        |
| RF Cable                                                  | Micable       | C10-01-01-1        | 100309            | Oct. 21, 2017 | 1 Year        |
| Temp&Humi Programmable                                    | ZHIXIANG      | ZXGDJS-150L        | ZX170110-A        | Oct. 21, 2017 | 1 Year        |
| Test Software                                             | JS Tonscend   | JS1120-3           | Ver.2.7           | N/A           | N/A           |
| <b>Radiation 1#chamber</b>                                |               |                    |                   |               |               |
| EMI Test Receiver                                         | R&S           | ESU8               | 100316            | Oct. 21, 2017 | 1 Year        |
| Spectrum analyzer                                         | Agilent       | E4447A             | MY50180031        | Jun. 29, 2018 | 1 Year        |
| Trilog Broadband Antenna                                  | Schwarzbeck   | VULB9163           | 9163-462          | Nov. 09, 2017 | 1 Year        |
| Active Loop antenna                                       | Schwarzbeck   | FMZB-1519          | 1519-038          | Oct. 17, 2017 | 1 Year        |
| Double Ridged Horn Antenna                                | R&S           | HF907              | 100276            | Oct. 17, 2017 | 1 Year        |
| Broad Band Horn Antenna                                   | Schwarzbeck   | BBHA 9170          | 790               | Nov. 09, 2017 | 1 Year        |
| Pre-amplifier                                             | A.H.          | PAM-0118           | 360               | Oct. 21, 2017 | 1 Year        |
| Pre-amplifier                                             | TERA-MW       | TRLA-0040 G35      | 101303            | Oct. 21, 2017 | 1 Year        |
| RF Cable                                                  | HUBSER        | CP-X2+ CP-X1       | W11.03+ W12.02    | Oct. 21, 2017 | 1 Year        |
| RF Cable                                                  | N/A           | SMAJ-SMA J-1M+ 11M | 17070133+17070131 | Nov. 08, 2017 | 1 Year        |
| MI Cable                                                  | HUBSER        | C10-01-01-1 M      | 1091629           | Oct. 21, 2017 | 1 Year        |
| Test software                                             | Audix         | E3                 | V 6.11111b        | N/A           | N/A           |
| <b>Power Line Conducted Emissions Test</b>                |               |                    |                   |               |               |
| EMI Test Receiver                                         | R&S           | ESU8               | 100316            | Oct. 21, 2017 | 1 Year        |
| LISN 1                                                    | R&S           | ENV216             | 101109            | Oct. 21, 2017 | 1 Year        |
| LISN 2                                                    | R&S           | ESH2-Z5            | 100309            | Oct. 21, 2017 | 1 Year        |
| Pulse Limiter                                             | R&S           | ESH3-Z2            | 101242            | Oct. 21, 2017 | 1 Year        |
| CE Cable 1                                                | HUBSER        | N/A                | W10.01            | Oct. 21, 2017 | 1 Year        |
| Test software                                             | Audix         | E3                 | V 6.11111b        | N/A           | N/A           |

## 4. 6dB Bandwidth and 99% Bandwidth

### 4.1. Block diagram of test setup

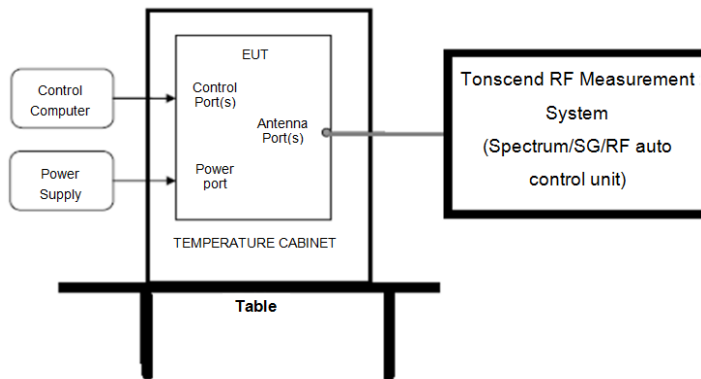

### 4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

### 4.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

|                |          |
|----------------|----------|
| RBW:           | 100kHz   |
| VBW:           | 300kHz   |
| Detector Mode: | Peak     |
| Sweep time:    | auto     |
| Trace mode     | Max hold |

(3) Allow the trace to stabilize, measure the 6dB and 99% bandwidth of signal.

### 4.4. Test Result

| Mode | Channel | 6dB bandwidth Result (MHz) | 99% bandwidth Result (MHz) | 6 dB width Limit (MHz) | Conclusion |
|------|---------|----------------------------|----------------------------|------------------------|------------|
| GFSK | CH0     | 0.752                      | 1.080                      | >0.5                   | PASS       |
|      | CH19    | 0.756                      | 1.076                      | >0.5                   | PASS       |
|      | CH39    | 0.752                      | 1.076                      | >0.5                   | PASS       |

**BLE ANT1 2402**

Ref: 20 dBm    \*Att: 20 dB    \*RBW 100 kHz    Delta 3 [T1:1]    \*VBW 300 kHz    -0.08 dB    755.000000000 kHz    SWT 5 ms

20 Offset 2 dB

Marker 1 [T1:1]    1.080000000 GHz    -12.96 dBm

Marker 2 [T1:1]    2.401614000 GHz    -12.96 dBm

Temp 1 [T1:OW]    2.402250000 GHz    -12.96 dBm

Temp 2 [T1:OW]    2.401440000 GHz    -12.96 dBm

Temp 2 [T1:OW]    2.402520000 GHz    -12.96 dBm

Center 2.402 GHz    400 kHz/    Span 4 MHz

Date: 1.AUG.2018 07:59:41

---

**BLE ANT1 2440**

Ref: 20 dBm    \*Att: 20 dB    \*RBW 100 kHz    Delta 3 [T1:1]    \*VBW 300 kHz    0.01 dB    756.000000000 kHz    SWT 5 ms

20 Offset 2 dB

Marker 1 [T1:1]    1.076000000 GHz    -12.33 dBm

Marker 2 [T1:1]    2.439610000 GHz    -12.53 dBm

Temp 1 [T1:OW]    2.440250000 GHz    -12.53 dBm

Temp 2 [T1:OW]    2.439440000 GHz    -12.53 dBm

Temp 2 [T1:OW]    2.440520000 GHz    -12.53 dBm

Center 2.44 GHz    400 kHz/    Span 4 MHz

Date: 1.AUG.2018 08:01:32

---

**BLE ANT1 2480**

Ref: 20 dBm    \*Att: 20 dB    \*RBW 100 kHz    Delta 3 [T1:1]    \*VBW 300 kHz    -0.13 dB    752.000000000 kHz    SWT 5 ms

20 Offset 2 dB

Marker 1 [T1:1]    1.076000000 GHz    -13.55 dBm

Marker 2 [T1:1]    2.479610000 GHz    -13.55 dBm

Temp 1 [T1:OW]    2.480250000 GHz    -13.55 dBm

Temp 2 [T1:OW]    2.479440000 GHz    -13.55 dBm

Temp 2 [T1:OW]    2.480520000 GHz    -13.55 dBm

Center 2.48 GHz    400 kHz/    Span 4 MHz

Date: 1.AUG.2018 08:03:01

## 5. Maximum Peak Output Power

### 5.1. Block diagram of test setup

Same with 4.1

### 5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:


|                |                     |
|----------------|---------------------|
| RBW:           | 3MHz                |
| VBW:           | 10MHz               |
| Span           | >1.5x 6dB bandwidth |
| Detector Mode: | Peak                |
| Sweep time:    | auto                |
| Trace mode     | Max hold            |

(3) Allow the trace to stabilize, Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges measure out the PK output power.

### 5.4. Test Result

| Mode | Freq (MHz) | Peak Output Power (dBm) | Limit (dBm) | Conclusion |
|------|------------|-------------------------|-------------|------------|
| GFSK | 2402       | -5.23                   | 30          | PASS       |
|      | 2440       | -4.45                   | 30          | PASS       |
|      | 2480       | -5.78                   | 30          | PASS       |

## 5.5. Original test data

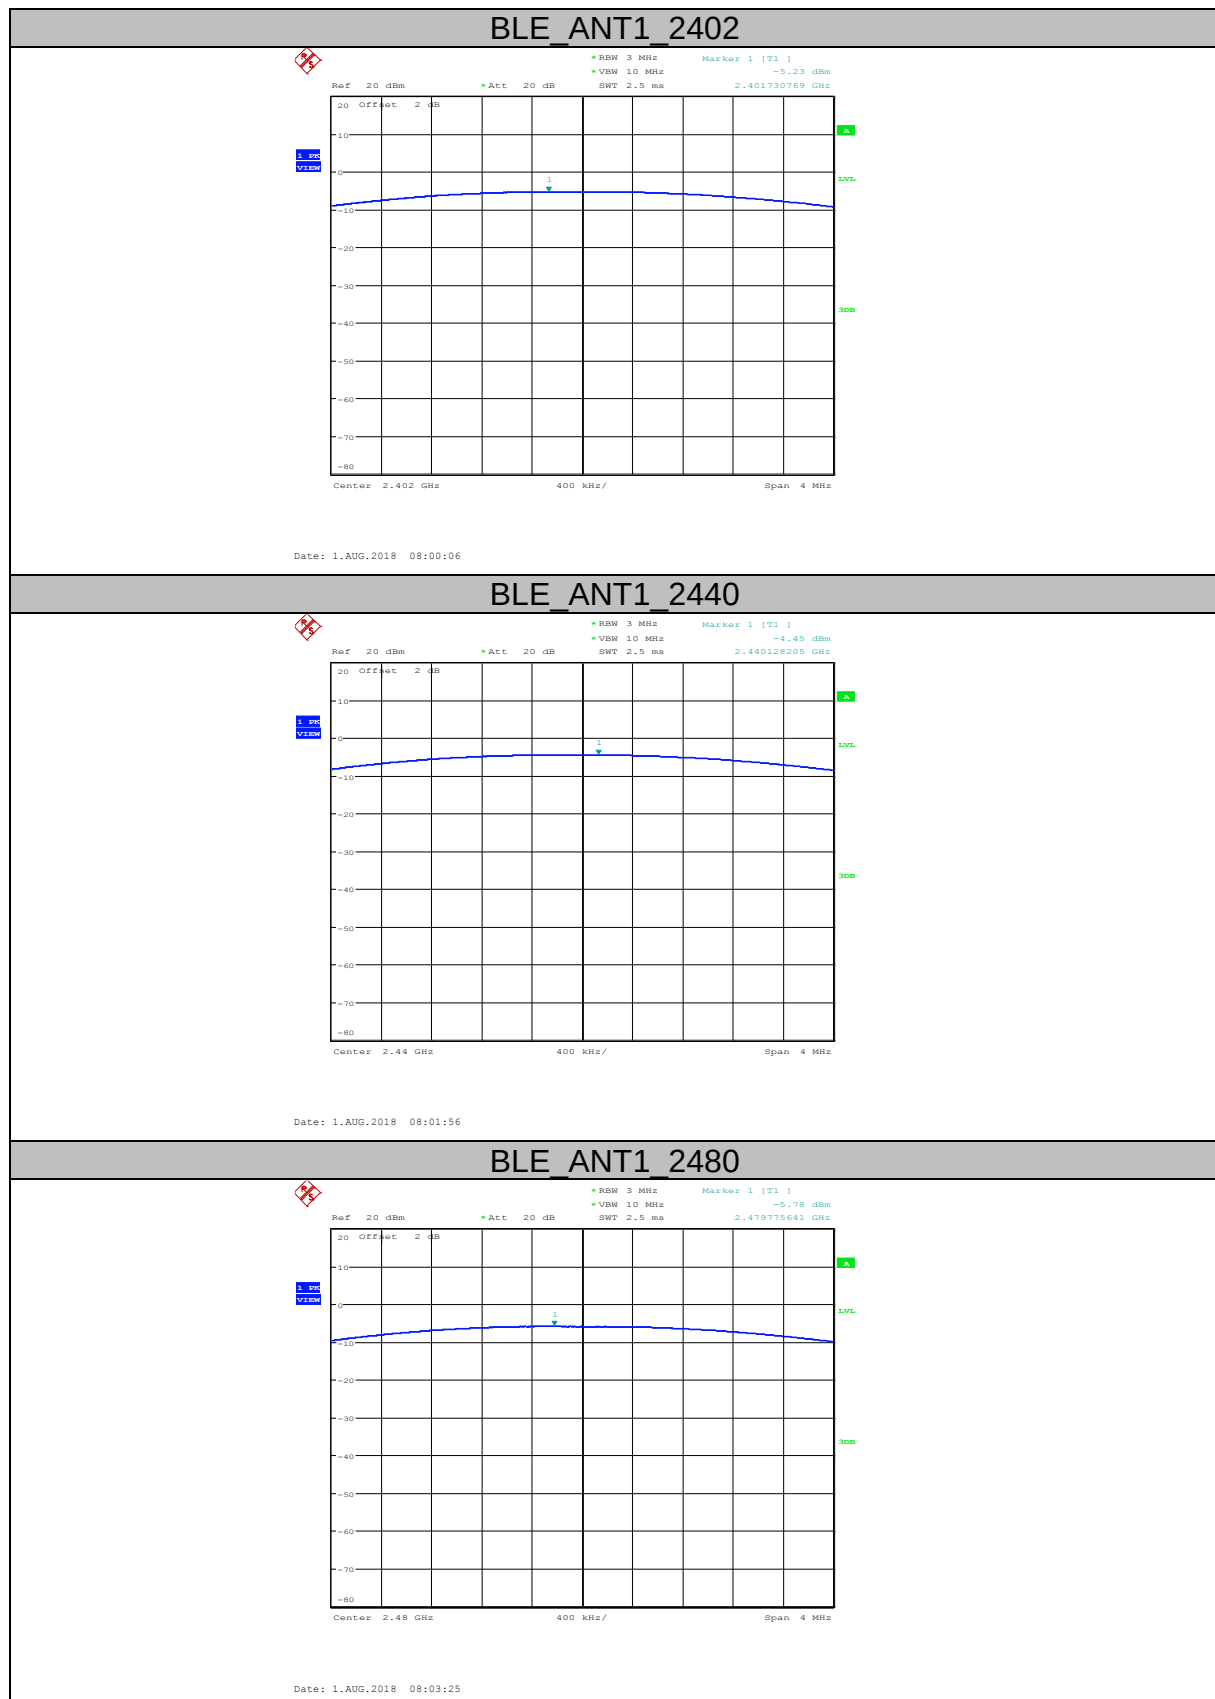

## 6. Power Spectral Density

### 6.1. Block diagram of test setup

Same with 4.1

### 6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

|                  |                                                    |
|------------------|----------------------------------------------------|
| Center frequency | DTS Channel center frequency                       |
| RBW:             | $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ |
| VBW:             | $\geq 3\text{RBW}$                                 |
| Span             | 1.5times the DTS bandwidth                         |
| Detector Mode:   | Peak                                               |
| Sweep time:      | auto                                               |
| Trace mode       | Max hold                                           |


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.4. Test Result

| EUT Set Mode                                       | Channel | Result (dBm/30kHz) | Result (dBm/3kHz) |
|----------------------------------------------------|---------|--------------------|-------------------|
| GFSK                                               | CH0     | -11.10             | -21.10            |
|                                                    | CH19    | -10.27             | -20.27            |
|                                                    | CH39    | -11.50             | -21.50            |
| Note: Result (dBm/3kHz) = Result (dBm/30kHz)- 10dB |         |                    |                   |
| Limit: <8dBm/3kHz                                  |         | Conclusion: PASS   |                   |

## 6.5. Original test data

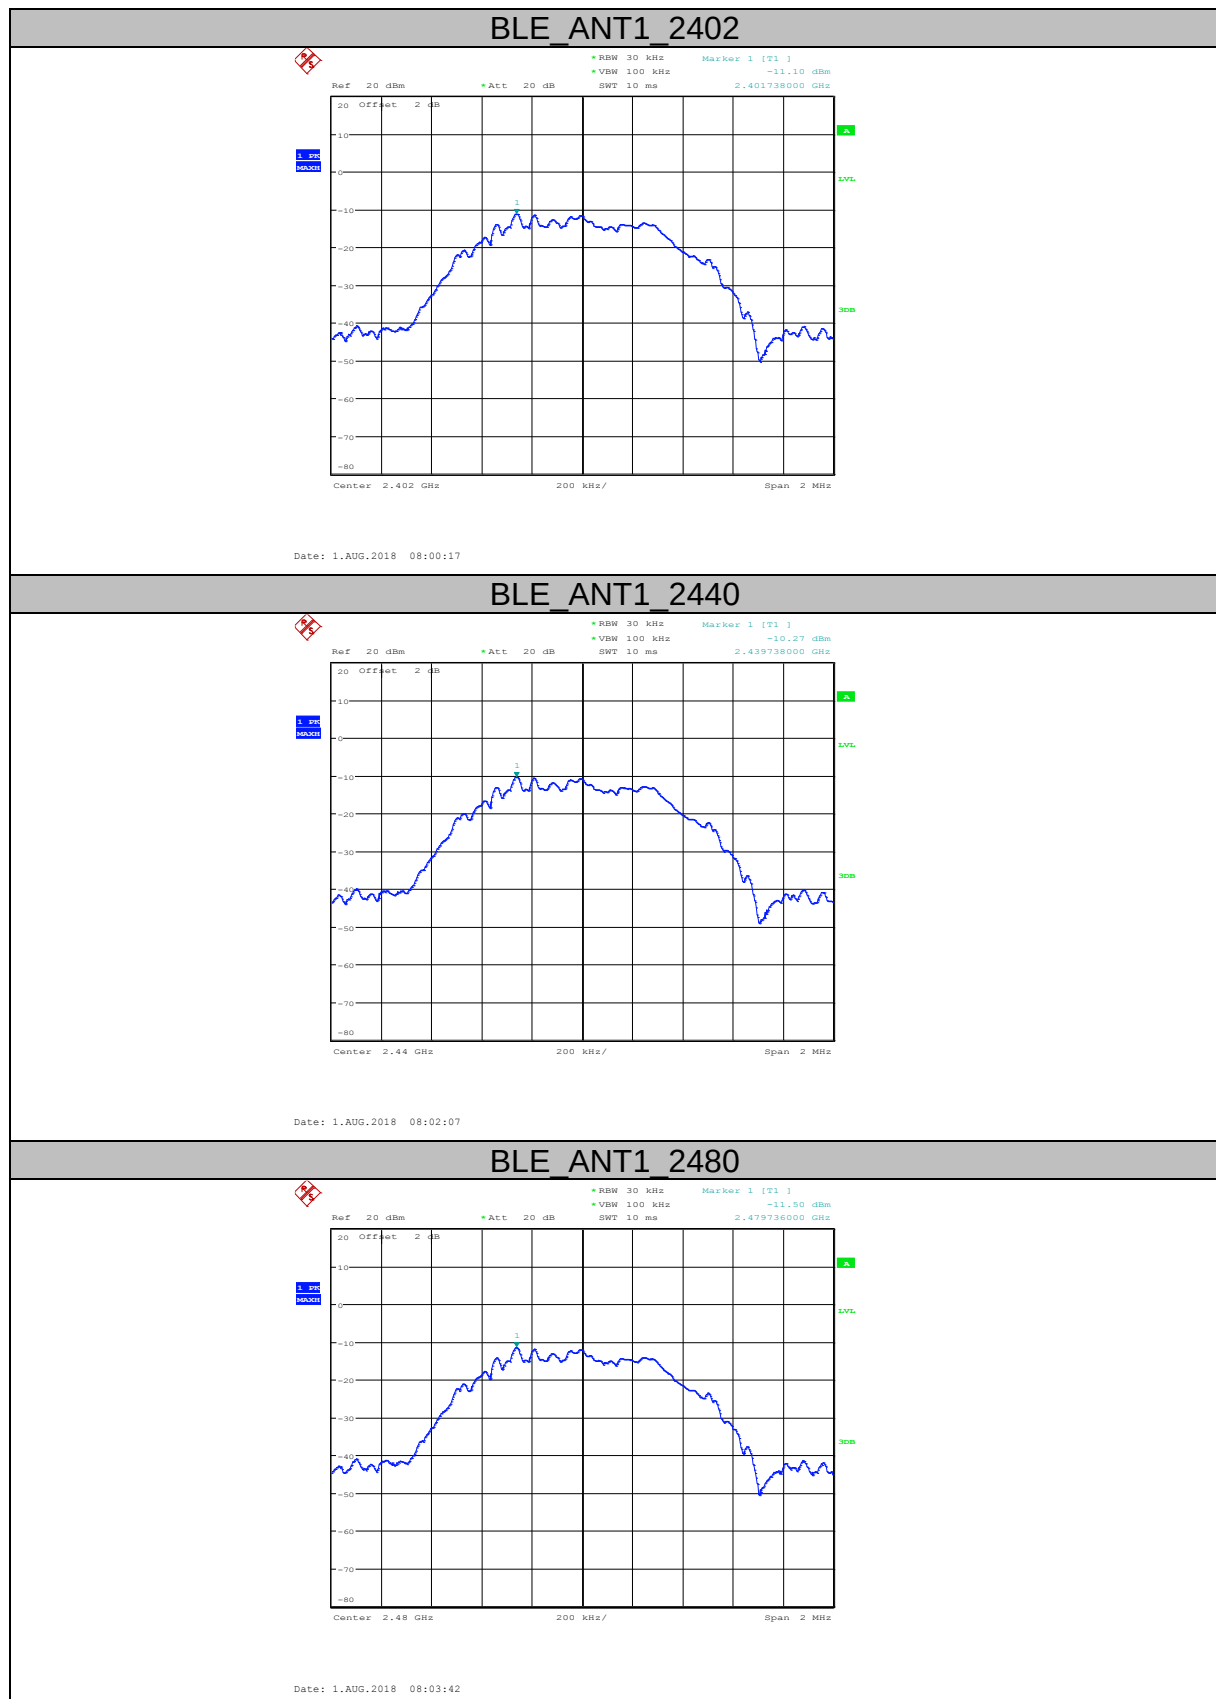



## 7. Band Edge Compliance (conducted method)

### 7.1. Block diagram of test setup

Same with 4.1

### 7.2. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 7.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

|                  |                              |
|------------------|------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW:             | 100kHz                       |
| VBW:             | 300kHz                       |
| Span             | 1.5times the DTS bandwidth   |
| Detector Mode:   | Peak                         |
| Sweep time:      | auto                         |
| Trace mode       | Max hold                     |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


|                              |                                          |
|------------------------------|------------------------------------------|
| RBW:                         | 100kHz                                   |
| VBW:                         | 300kHz                                   |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{span/RBW}$                   |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | auto                                     |
| Trace mode                   | Max hold                                 |

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

## 7.4. Test Result

| EUT Set Mode | CH or Frequency | Measured Range    | Result (dBm) |
|--------------|-----------------|-------------------|--------------|
| GFSK         | CH0             | 2.310GHz-2.410GHz | PASS         |
|              | CH39            | 2.470GHz-2.570GHz | PASS         |


## 7.5. Original test data

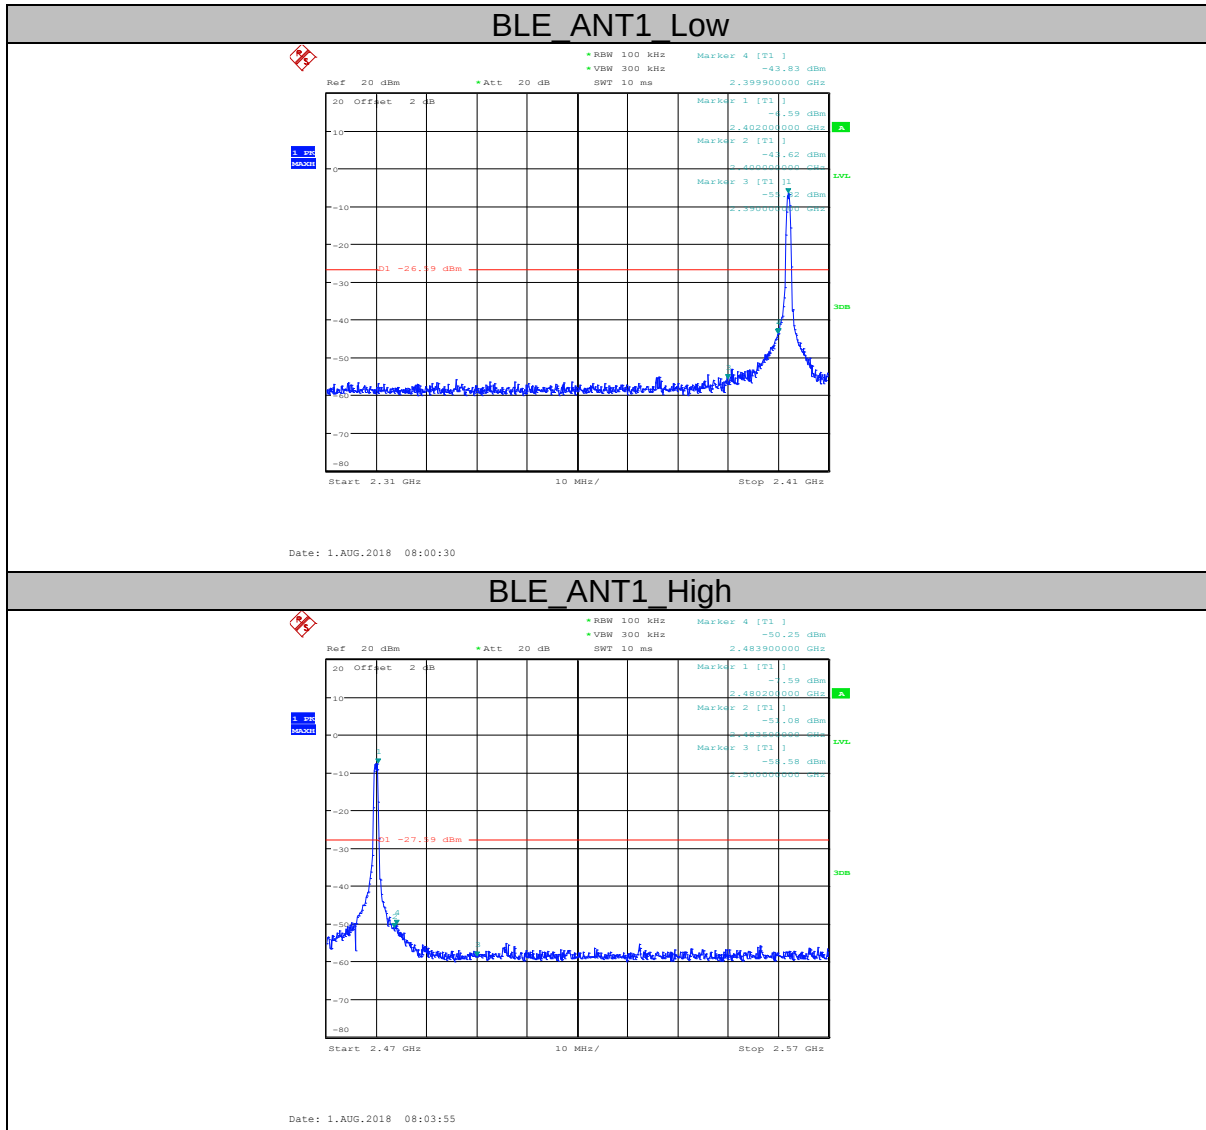


## 8. Radiated emission

### 8.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

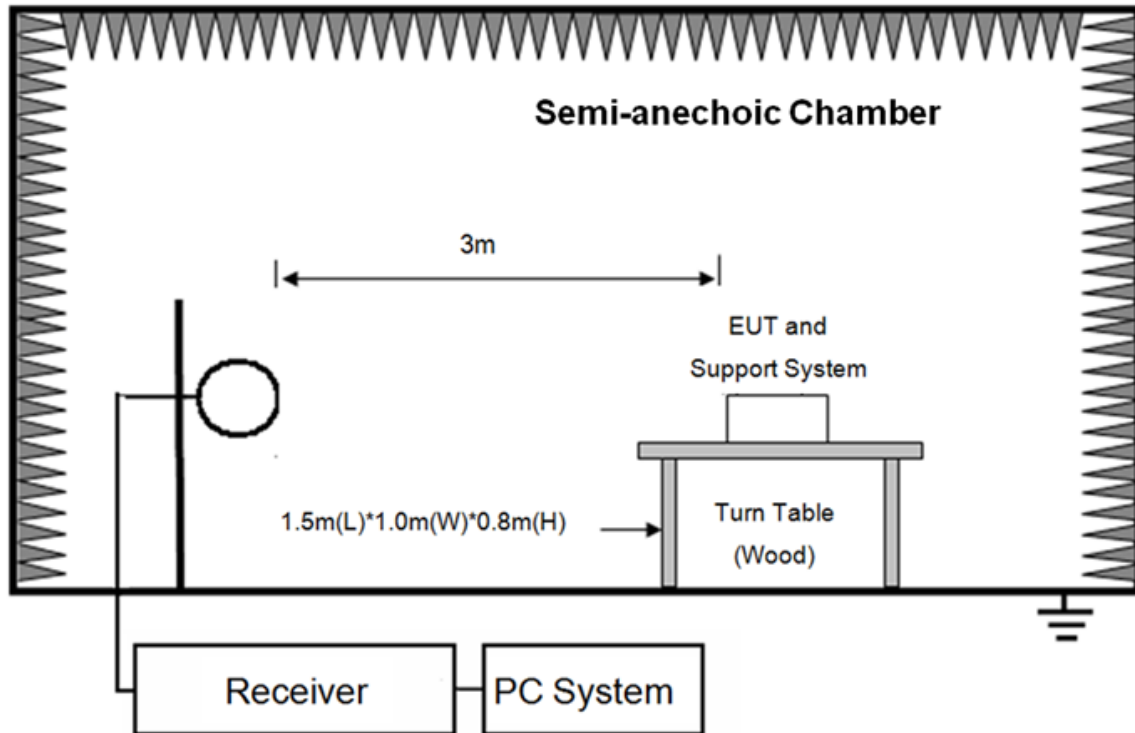

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

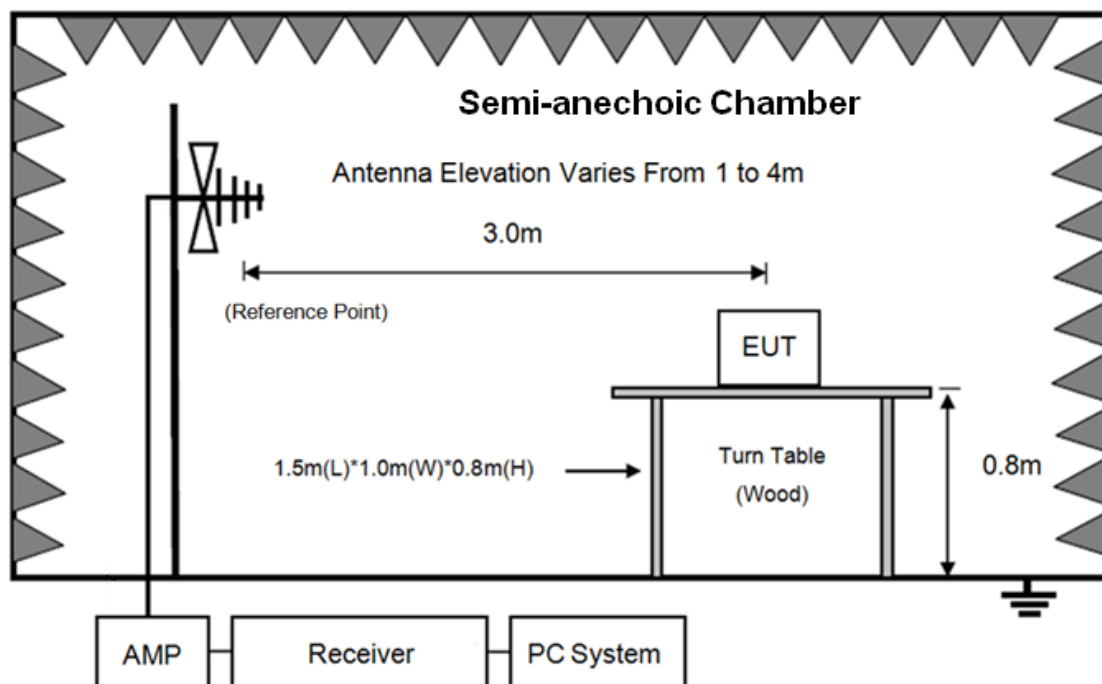

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

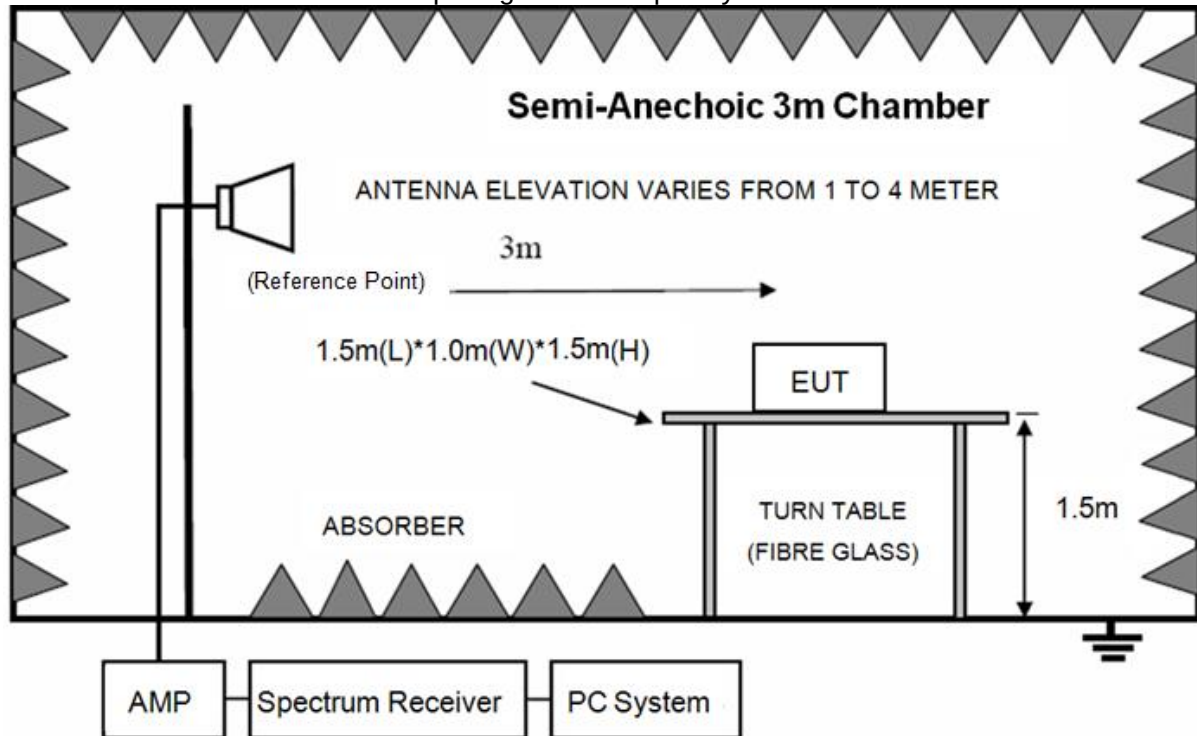

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

## 8.2. Limit

### 8.2.1 FCC 15.205 Restricted frequency band

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.1772&4.17775    | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.2072&4.20775    | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (?)         |
| 13.36-13.41       |                     |               |             |

## 8.2.2 FCC 15.209 Limit.

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                                                                             |                                   |
|------------------|--------------------|---------------------------------------------------------------------------------------------------|-----------------------------------|
|                  |                    | $\mu\text{V/m}$                                                                                   | $\text{dB}(\mu\text{V})/\text{m}$ |
| 0.009 ~ 0.490    | 300                | $2400/F(\text{kHz})$                                                                              | $67.6-20\log(F)$                  |
| 0.490 ~ 1.705    | 30                 | $24000/F(\text{kHz})$                                                                             | $87.6-20\log(F)$                  |
| 1.705 ~ 30.0     | 30                 | 30                                                                                                | 29.54                             |
| 30 ~ 88          | 3                  | 100                                                                                               | 40.0                              |
| 88 ~ 216         | 3                  | 150                                                                                               | 43.5                              |
| 216 ~ 960        | 3                  | 200                                                                                               | 46.0                              |
| 960 ~ 1000       | 3                  | 500                                                                                               | 54.0                              |
| Above 1000       | 3                  | 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)<br>54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) |                                   |

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30\text{m}/3\text{m})$$

## 8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

## 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1G.
- (2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

| Test frequency range | Test antenna used                      | Test antenna distance |
|----------------------|----------------------------------------|-----------------------|
| 9kHz-30MHz           | Active Loop antenna                    | 3m                    |
| 30MHz-1GHz           | Trilog Broadband Antenna               | 3m                    |
| 1GHz-18GHz           | Double Ridged Horn Antenna(1GHz-18GHz) | 3m                    |
| 18GHz-40GHz          | Horn Antenna(18GHz-40GHz)              | 1m                    |

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 25GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9kHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so below final test was performed with frequency range from 30MHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz,110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

| Frequency band | RBW    |
|----------------|--------|
| 9kHz-150kHz    | 200Hz  |
| 150kHz-30MHz   | 9kHz   |
| 30MHz-1GHz     | 120kHz |

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure (according ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure).

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

#### 8.4. Test result

**PASS. (See below detailed test result)**

All the emissions except fundamental emission from 9kHz to 25GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission was detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in GFSK, Tx 2440MHz mode.


Note3: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

## Radiated Emission test (below 1GHz)

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1# **D:\2018 RE1# Report Data\Q18092604-1E MINI2\RE.EM6**  
**Test Date** : 2018-10-08 **Tested By** : Open  
**EUT** : Portable Bluetooth Speaker **Model Number** : ESQUIRE MINI2  
**Power Supply** : Battery **Test Mode** : Tx mode  
**Condition** : Temp:24.5°C, Humi:55.5%,  
 Press:100.1kPa **Antenna/Distance** : 2017 VULB 9163 1#/3m/HORIZONTAL  
**Memo** :

Data: 16

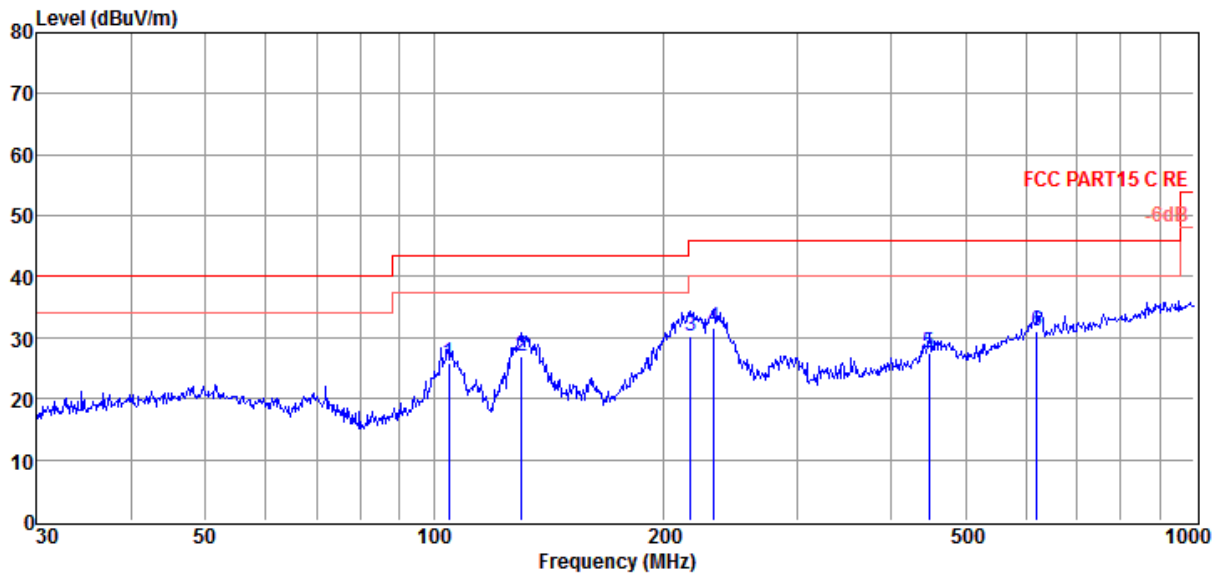

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 104.54         | 10.32                   | 10.94                       | 4.45                | 25.71                       | 43.50                     | -17.79                | QP       | HORIZONTAL   |
| 2              | 130.38         | 14.00                   | 8.23                        | 4.64                | 26.87                       | 43.50                     | -16.63                | QP       | HORIZONTAL   |
| 3              | 217.54         | 13.26                   | 11.87                       | 5.12                | 30.25                       | 46.00                     | -15.75                | QP       | HORIZONTAL   |
| 4              | 233.35         | 14.27                   | 12.18                       | 5.21                | 31.66                       | 46.00                     | -14.34                | QP       | HORIZONTAL   |
| 5              | 447.98         | 5.49                    | 16.37                       | 5.63                | 27.49                       | 46.00                     | -18.51                | QP       | HORIZONTAL   |
| 6              | 620.71         | 4.97                    | 19.47                       | 6.74                | 31.18                       | 46.00                     | -14.82                | QP       | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.


3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1# **D:\2018 RE1# Report Data\Q18092604-1E MINI2\RE.EM6**  
**Test Date** : 2018-10-08 **Tested By** : Open  
**EUT** : Portable Bluetooth Speaker **Model Number** : ESQUIRE MINI2  
**Power Supply** : Battery **Test Mode** : Tx mode  
**Condition** : Temp:24.5°C, Humi:55.5%,  
 Press:100.1kPa **Antenna/Distance** : 2017 VULB 9163 1#/3m/VERTICAL  
**Memo** :

Data: 15

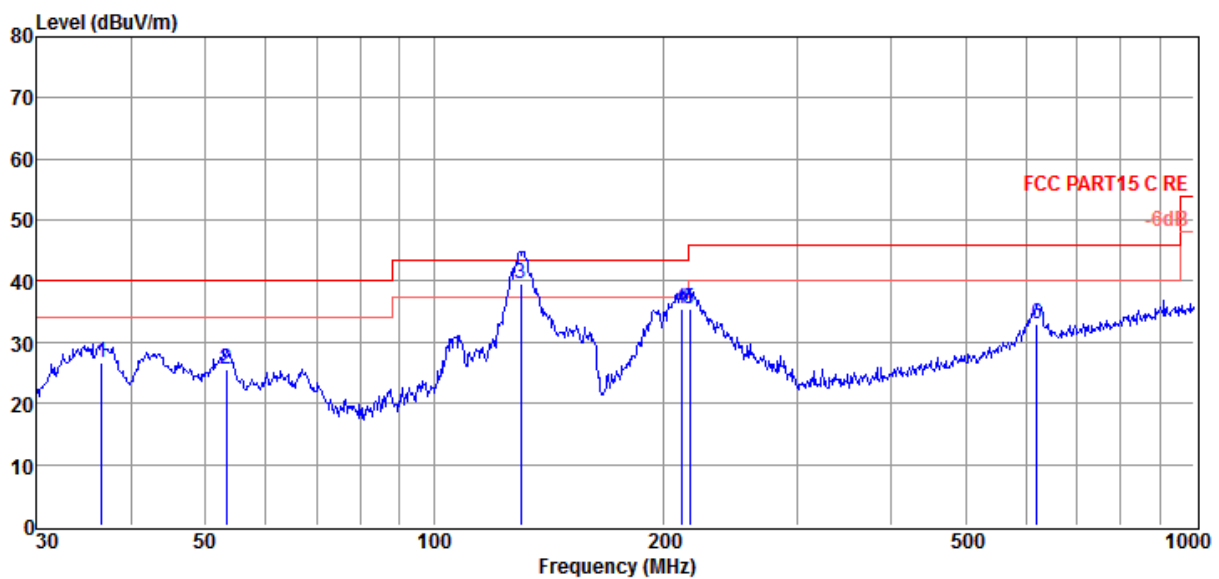

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 36.51          | 11.01                   | 11.90                       | 3.84                | 26.75                       | 40.00                     | -13.25                | QP       | VERTICAL     |
| 2              | 53.32          | 8.54                    | 12.95                       | 4.03                | 25.52                       | 40.00                     | -14.48                | QP       | VERTICAL     |
| 3              | 129.92         | 26.80                   | 8.27                        | 4.64                | 39.71                       | 43.50                     | -3.79                 | QP       | VERTICAL     |
| 4              | 211.53         | 18.59                   | 11.75                       | 5.09                | 35.43                       | 43.50                     | -8.07                 | QP       | VERTICAL     |
| 5              | 216.78         | 18.51                   | 11.86                       | 5.12                | 35.49                       | 46.00                     | -10.51                | QP       | VERTICAL     |
| 6              | 620.71         | 6.82                    | 19.47                       | 6.74                | 33.03                       | 46.00                     | -12.97                | QP       | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

**Radiated Emission test (above 1GHz)**

| Freq.<br>(MHz)       | Read<br>level<br>(dBμV) | Antenn<br>a<br>Factor<br>(dB/m) | PRM<br>Facto<br>r(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμ<br>V/m) | Margin<br>(dB) | Detecto<br>r<br>type | Polarization |
|----------------------|-------------------------|---------------------------------|-----------------------|-----------------------|-----------------------------|-----------------------|----------------|----------------------|--------------|
| GFSK Tx mode 2402MHz |                         |                                 |                       |                       |                             |                       |                |                      |              |
| 5981.00              | 48.94                   | 35.69                           | 43.21                 | 8.20                  | 49.62                       | 74.00                 | -24.38         | Peak                 | HORIZONTAL   |
| 7375.00              | 47.69                   | 36.95                           | 43.61                 | 8.67                  | 49.70                       | 74.00                 | -24.30         | Peak                 | HORIZONTAL   |
| 8633.00              | 46.95                   | 37.35                           | 43.99                 | 9.95                  | 50.26                       | 74.00                 | -23.74         | Peak                 | HORIZONTAL   |
| 9449.00              | 47.62                   | 37.68                           | 44.23                 | 10.60                 | 51.67                       | 74.00                 | -22.33         | Peak                 | HORIZONTAL   |
| 12118.00             | 46.15                   | 38.88                           | 44.13                 | 11.01                 | 51.91                       | 74.00                 | -22.09         | Peak                 | HORIZONTAL   |
| 13002.00             | 47.41                   | 39.30                           | 44.35                 | 11.35                 | 53.71                       | 74.00                 | -20.29         | Peak                 | HORIZONTAL   |
| 5148.00              | 48.57                   | 35.15                           | 43.71                 | 7.67                  | 47.68                       | 74.00                 | -26.32         | Peak                 | VERTICAL     |
| 5981.00              | 48.34                   | 35.69                           | 43.21                 | 8.20                  | 49.02                       | 74.00                 | -24.98         | Peak                 | VERTICAL     |
| 7205.00              | 50.60                   | 36.88                           | 43.56                 | 8.51                  | 52.43                       | 74.00                 | -21.57         | Peak                 | VERTICAL     |
| 8055.00              | 47.09                   | 37.21                           | 43.82                 | 9.29                  | 49.77                       | 74.00                 | -24.23         | Peak                 | VERTICAL     |
| 8480.00              | 47.07                   | 37.30                           | 43.94                 | 9.78                  | 50.21                       | 74.00                 | -23.79         | Peak                 | VERTICAL     |
| 9789.00              | 46.96                   | 37.99                           | 44.34                 | 10.78                 | 51.39                       | 74.00                 | -22.61         | Peak                 | VERTICAL     |
| GFSK Tx mode 2440MHz |                         |                                 |                       |                       |                             |                       |                |                      |              |
| 5692.00              | 48.45                   | 35.58                           | 43.38                 | 8.02                  | 48.67                       | 74.00                 | -25.33         | Peak                 | HORIZONTAL   |
| 6117.00              | 47.62                   | 35.70                           | 43.24                 | 8.22                  | 48.30                       | 74.00                 | -25.70         | Peak                 | HORIZONTAL   |
| 7205.00              | 48.85                   | 36.88                           | 43.56                 | 8.51                  | 50.68                       | 74.00                 | -23.32         | Peak                 | HORIZONTAL   |
| 8106.00              | 47.00                   | 37.22                           | 43.83                 | 9.35                  | 49.74                       | 74.00                 | -24.26         | Peak                 | HORIZONTAL   |
| 8633.00              | 47.36                   | 37.35                           | 43.99                 | 9.95                  | 50.67                       | 74.00                 | -23.33         | Peak                 | HORIZONTAL   |
| 9534.00              | 46.95                   | 37.73                           | 44.26                 | 10.65                 | 51.07                       | 74.00                 | -22.93         | Peak                 | HORIZONTAL   |
| 4927.00              | 47.31                   | 34.88                           | 43.84                 | 7.51                  | 45.86                       | 74.00                 | -28.14         | Peak                 | VERTICAL     |
| 6032.00              | 47.52                   | 35.70                           | 43.21                 | 8.21                  | 48.22                       | 74.00                 | -25.78         | Peak                 | VERTICAL     |
| 6814.00              | 47.84                   | 36.39                           | 43.44                 | 8.31                  | 49.10                       | 74.00                 | -24.90         | Peak                 | VERTICAL     |
| 7460.00              | 45.81                   | 36.98                           | 43.64                 | 8.74                  | 47.89                       | 74.00                 | -26.11         | Peak                 | VERTICAL     |
| 8038.00              | 46.44                   | 37.21                           | 43.81                 | 9.27                  | 49.11                       | 74.00                 | -24.89         | Peak                 | VERTICAL     |
| 9058.00              | 46.90                   | 37.52                           | 44.12                 | 10.40                 | 50.70                       | 74.00                 | -23.30         | Peak                 | VERTICAL     |
| GFSK Tx mode 2480MHz |                         |                                 |                       |                       |                             |                       |                |                      |              |
| 5148.00              | 47.80                   | 35.15                           | 43.71                 | 7.67                  | 46.91                       | 74.00                 | -27.09         | Peak                 | HORIZONTAL   |
| 6729.00              | 46.87                   | 36.20                           | 43.42                 | 8.30                  | 47.95                       | 74.00                 | -26.05         | Peak                 | HORIZONTAL   |
| 7817.00              | 47.50                   | 37.13                           | 43.75                 | 9.07                  | 49.95                       | 74.00                 | -24.05         | Peak                 | HORIZONTAL   |
| 8276.00              | 46.90                   | 37.26                           | 43.88                 | 9.54                  | 49.82                       | 74.00                 | -24.18         | Peak                 | HORIZONTAL   |
| 9517.00              | 47.10                   | 37.72                           | 44.26                 | 10.64                 | 51.20                       | 74.00                 | -22.80         | Peak                 | HORIZONTAL   |
| 11948.00             | 45.02                   | 38.87                           | 44.11                 | 10.97                 | 50.75                       | 74.00                 | -23.25         | Peak                 | HORIZONTAL   |
| 4910.00              | 47.81                   | 34.86                           | 43.85                 | 7.49                  | 46.31                       | 74.00                 | -27.69         | Peak                 | VERTICAL     |
| 6814.00              | 47.84                   | 36.39                           | 43.44                 | 8.31                  | 49.10                       | 74.00                 | -24.90         | Peak                 | VERTICAL     |
| 7817.00              | 47.37                   | 37.13                           | 43.75                 | 9.07                  | 49.82                       | 74.00                 | -24.18         | Peak                 | VERTICAL     |
| 8497.00              | 48.59                   | 37.30                           | 43.95                 | 9.80                  | 51.74                       | 74.00                 | -22.26         | Peak                 | VERTICAL     |
| 9466.00              | 47.90                   | 37.69                           | 44.24                 | 10.61                 | 51.96                       | 74.00                 | -22.04         | Peak                 | VERTICAL     |
| 12186.00             | 46.55                   | 38.86                           | 44.15                 | 11.04                 | 52.30                       | 74.00                 | -21.70         | Peak                 | VERTICAL     |
| Result: Pass         |                         |                                 |                       |                       |                             |                       |                |                      |              |

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

## 9. RF Conducted Spurious Emissions

### 9.1. Block diagram of test setup

Same as section 4.1

### 9.2. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 9.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

|                  |                              |
|------------------|------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW:             | 100kHz                       |
| VBW:             | 300kHz                       |
| Span             | 1.5times the DTS bandwidth   |
| Detector Mode:   | Peak                         |
| Sweep time:      | auto                         |
| Trace mode       | Max hold                     |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


|                              |                                          |
|------------------------------|------------------------------------------|
| RBW:                         | 100kHz                                   |
| VBW:                         | 300kHz                                   |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{span/RBW}$                   |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | auto                                     |
| Trace mode                   | Max hold                                 |


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

## 9.4. Test Result

| Mode | Freq. (MHz) | Conclusion |
|------|-------------|------------|
| GFSK | 2402        | PASS       |
|      | 2440        | PASS       |
|      | 2480        | PASS       |


## 9.5. Original test data

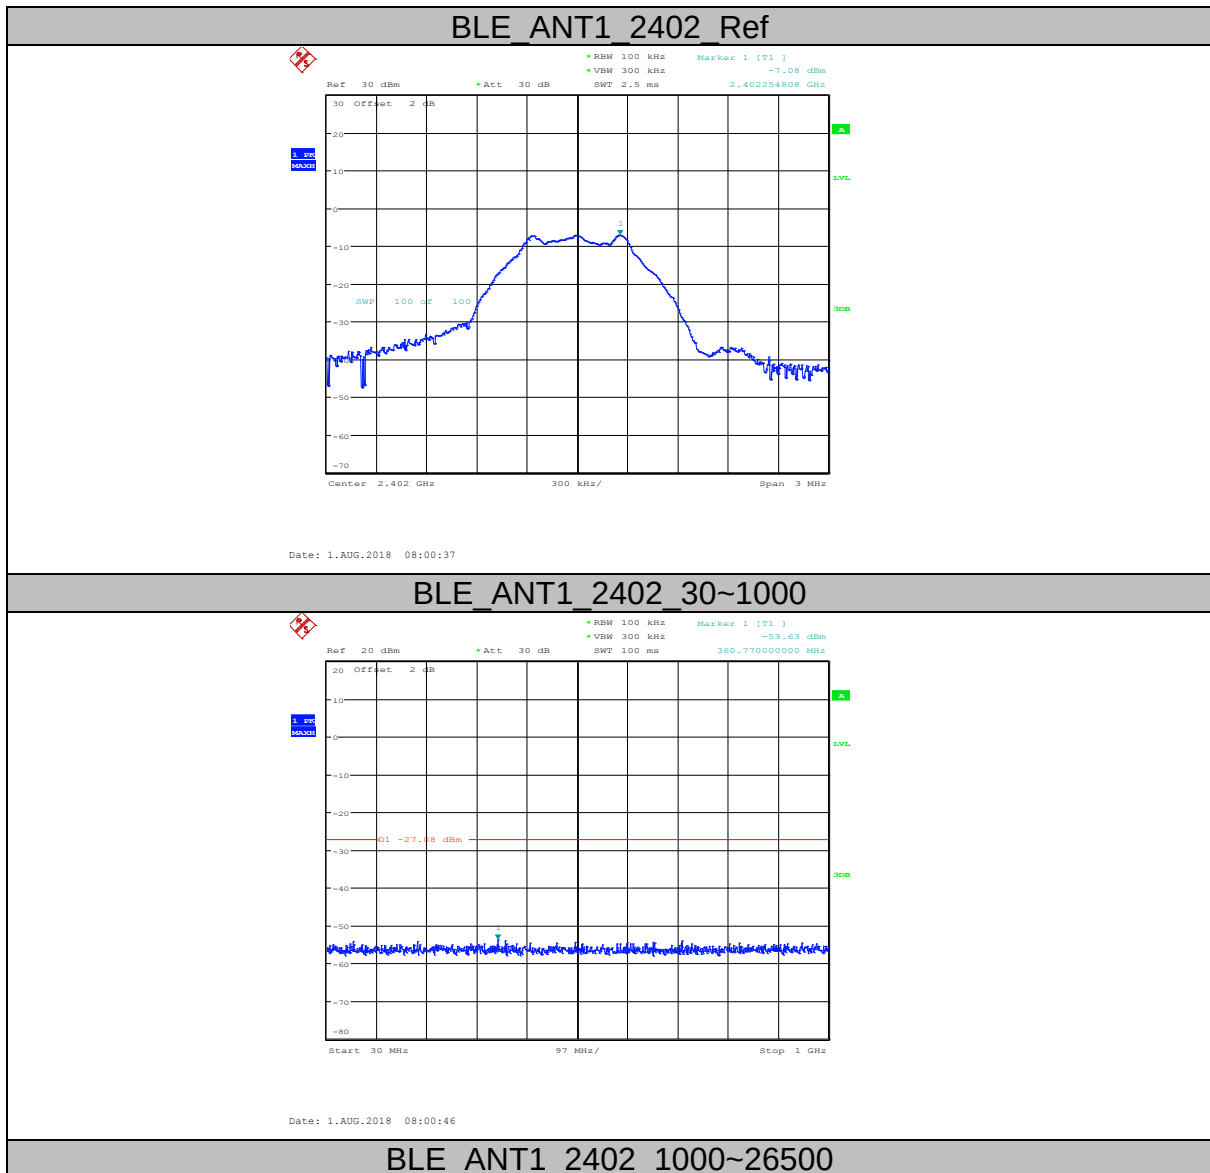

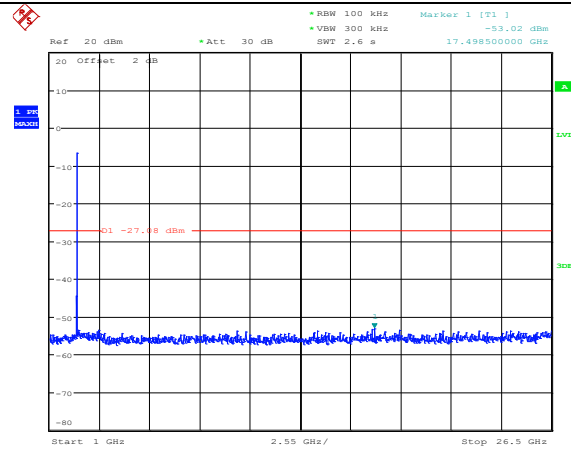


Date: 1.AUG.2018 08:00:57

## BLE\_ANT1\_2440\_Ref

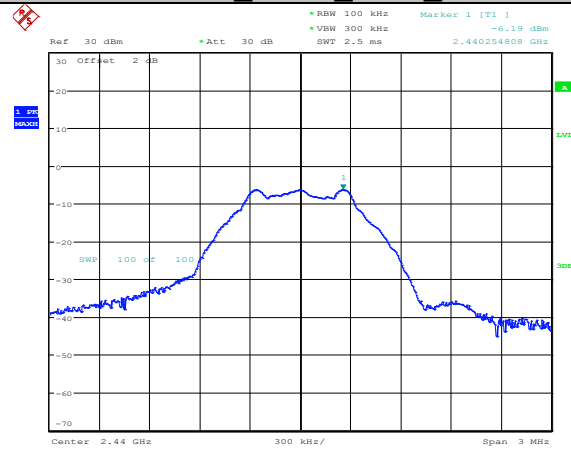


Date: 1.AUG.2018 08:02:14

## BLE\_ANT1\_2440\_30~1000

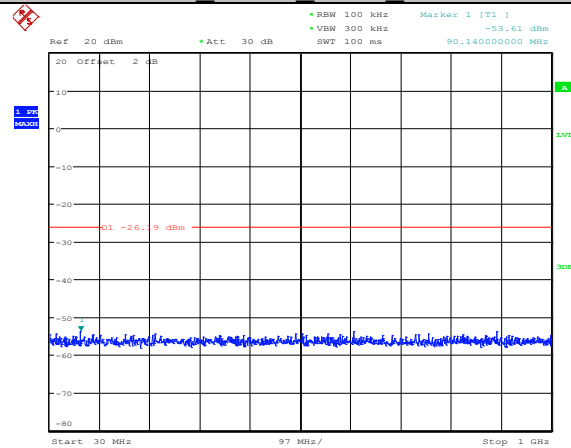


Date: 1.AUG.2018 08:02:23

## BLE\_ANT1\_2440\_1000~26500

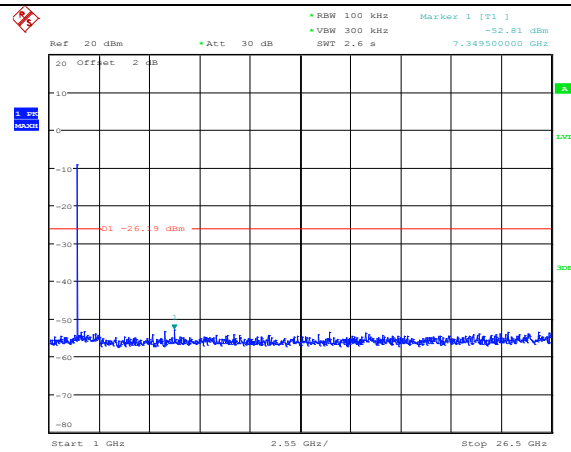


Date: 1.AUG.2018 08:02:34

## BLE ANT1 2480 Ref

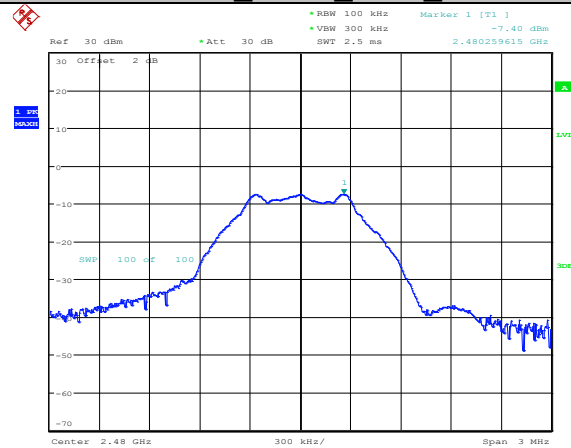


Date: 1.AUG.2018 08:04:01

## BLE ANT1 2480 30~1000

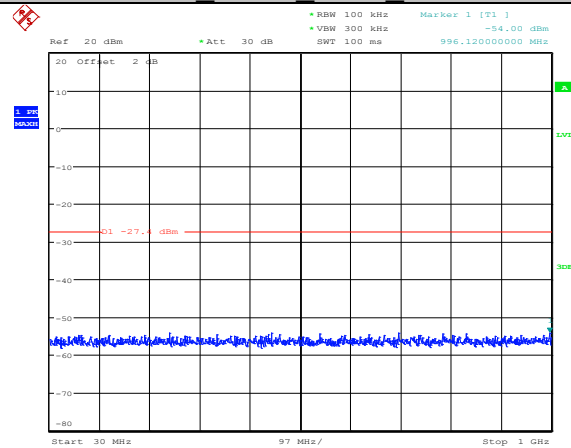


Date: 1.AUG.2018 08:04:10

## BLE ANT1 2480 1000~26500

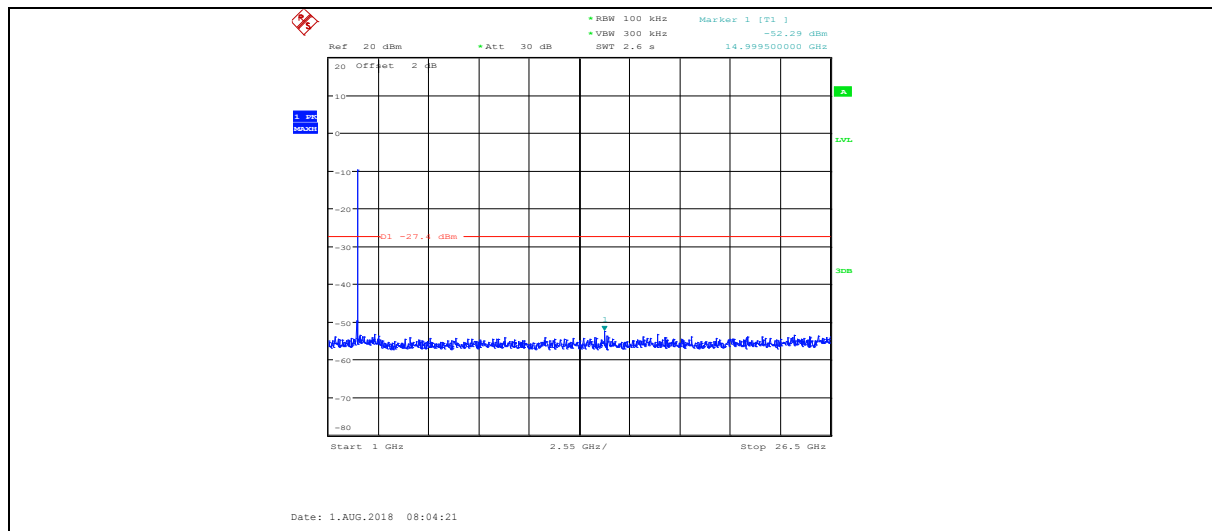

## 10. Emission in restricted frequency bands

### 10.1. Block diagram of test setup

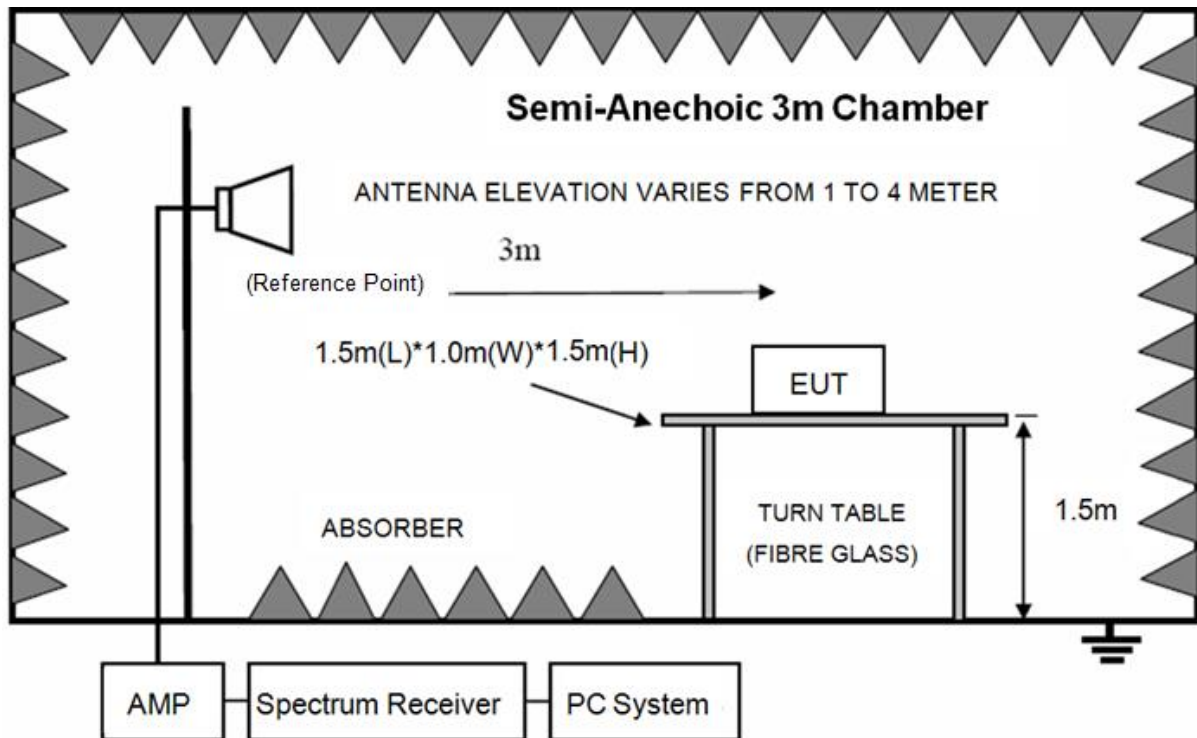

### 10.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz and 5725MHz to 5850MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 10.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310MHz to 2410MHz and 2470MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

### 10.4. Test result

**PASS. (See below detailed test result)**




# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2018-07-30  
**EUT** : Portable Bluetooth Speaker  
**Power Supply** : Battery  
**Condition** : Temp:24.5°C, Humi:55.5%,  
 Press:100.1kPa  
**Memo** : BLE 2402

**D:\2018 RE1# Report Data\Q18050805-1E MINI2\FCC ABOVE1G.EM6**  
**Tested By** : Talent  
**Model Number** : ESQUIRE MINI2  
**Test Mode** : Tx mode  
**Antenna/Distance** : 2017 HF907/3m/HORIZONTAL

Data: 22

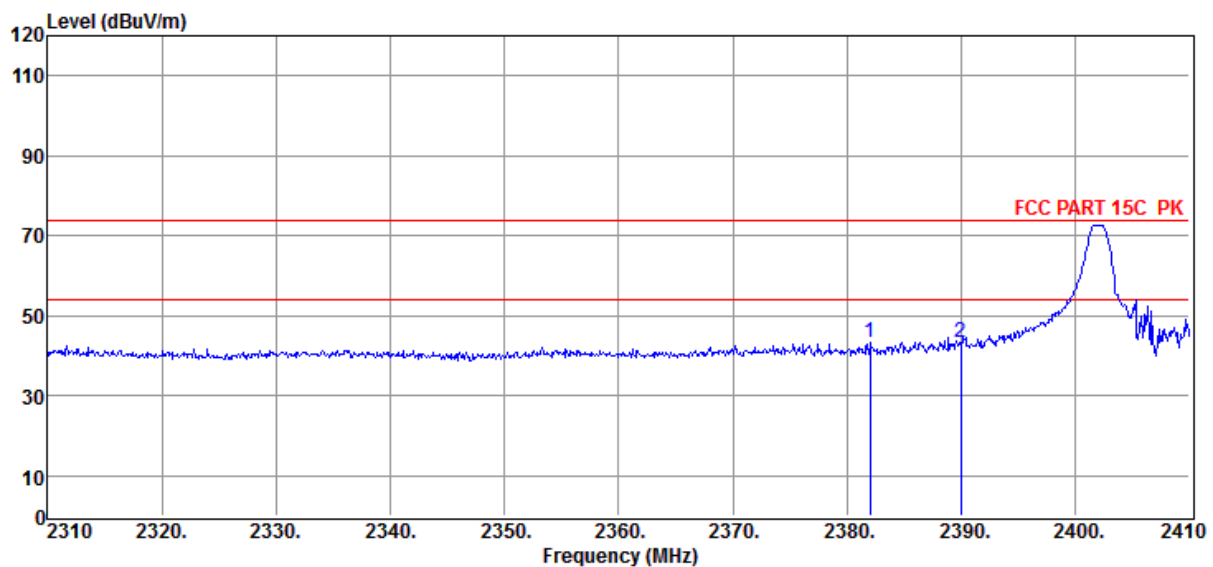

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2382.00        | 55.43                   | 26.98                       | 44.32               | 5.10                | 43.19                       | 74.00                     | -30.81                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 55.52                   | 27.00                       | 44.32               | 5.11                | 43.31                       | 74.00                     | -30.69                | Peak     | HORIZONTAL   |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2018-07-30  
**EUT** : Portable Bluetooth Speaker  
**Power Supply** : Battery  
**Condition** : Temp:24.5°C, Humi:55.5%,  
 Press:100.1kPa  
**Memo** : BLE 2402

**D:\2018 RE1# Report Data\Q18050805-1E MINI2\FCC ABOVE1G.EM6**  
**Tested By** : Talent  
**Model Number** : ESQUIRE MINI2  
**Test Mode** : Tx mode  
**Antenna/Distance** : 2017 HF907/3m/VERTICAL

Data: 23

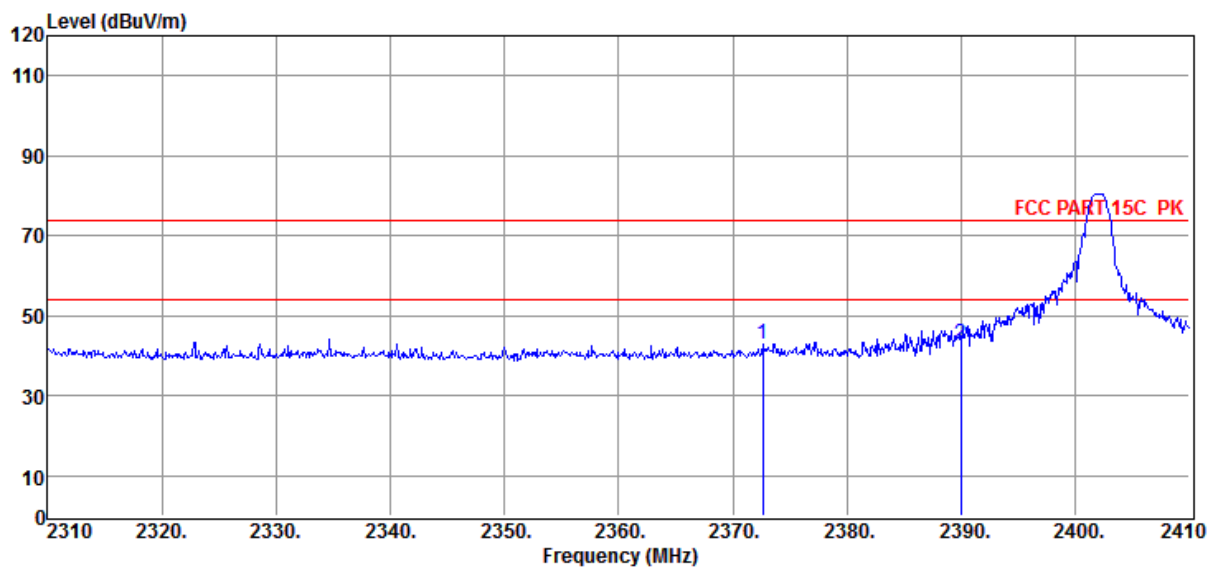

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2372.60        | 55.11                   | 26.94                       | 44.32               | 5.09                | 42.82                       | 74.00                     | -31.18                | Peak     | VERTICAL     |
| 2              | 2390.00        | 54.93                   | 27.00                       | 44.32               | 5.11                | 42.72                       | 74.00                     | -31.28                | Peak     | VERTICAL     |

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#

D:\2018 RE1# Report Data\Q18050805-1E MINI2\FCC ABOVE1G.EM6

**Test Date** : 2018-07-30

**Tested By** : Talent

**EUT** : Portable Bluetooth Speaker

**Model Number** : ESQUIRE MINI2

**Power Supply** : Battery


**Test Mode** : Tx mode

**Condition** : Temp:24.5°C, Humi:55.5%,  
Press:100.1kPa

**Antenna/Distance** : 2017 HF907/3m/VERTICAL

**Memo** : BLE 2480

Data: 24

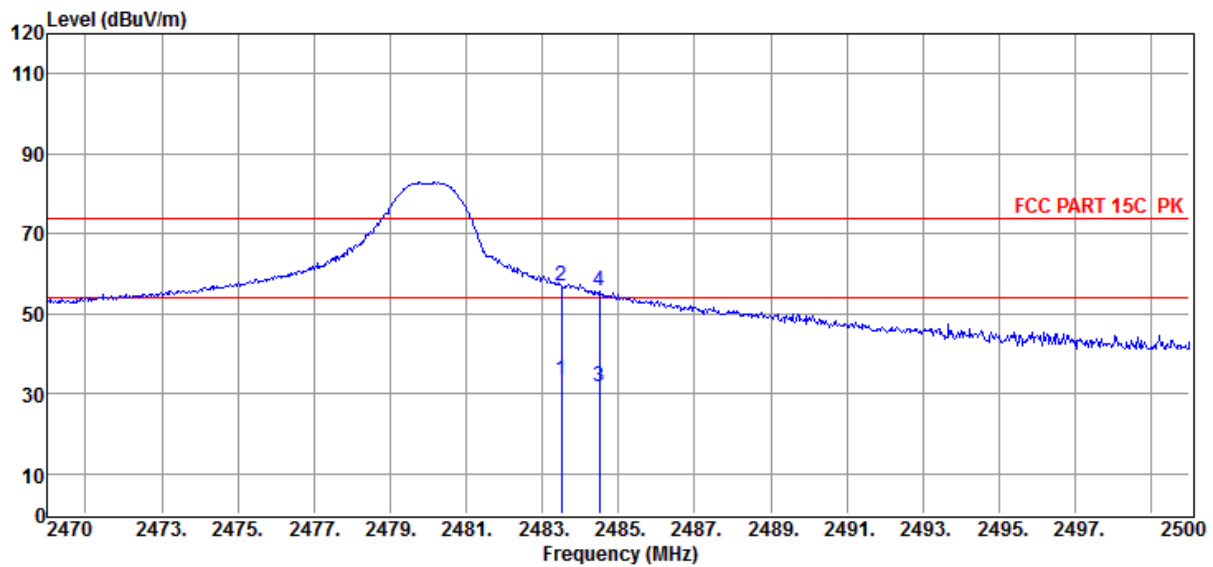

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m<br>) | Limit<br>Line<br>(dBμV<br>/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|---------------------------------|-------------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 45.37                   | 27.34                       | 44.32               | 5.21                | 33.60                           | 54.00                         | -20.40                | Average  | VERTICAL     |
| 2              | 2483.50        | 68.59                   | 27.34                       | 44.32               | 5.21                | 56.82                           | 74.00                         | -17.18                | Peak     | VERTICAL     |
| 3              | 2484.49        | 43.34                   | 27.34                       | 44.32               | 5.21                | 31.57                           | 54.00                         | -22.43                | Average  | VERTICAL     |
| 4              | 2484.49        | 67.38                   | 27.34                       | 44.32               | 5.21                | 55.61                           | 74.00                         | -18.39                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2018-07-30  
**EUT** : Portable Bluetooth Speaker  
**Power Supply** : Battery  
**Condition** : Temp:24.5°C, Humi:55.5%,  
 Press:100.1kPa  
**Memo** : BLE 2480

**D:\2018 RE1# Report Data\Q18050805-1E MINI2\FCC ABOVE1G.EM6**  
**Tested By** : Talent  
**Model Number** : ESQUIRE MINI2  
**Test Mode** : Tx mode  
**Antenna/Distance** : 2017 HF907/3m/HORIZONTAL

Data: 25

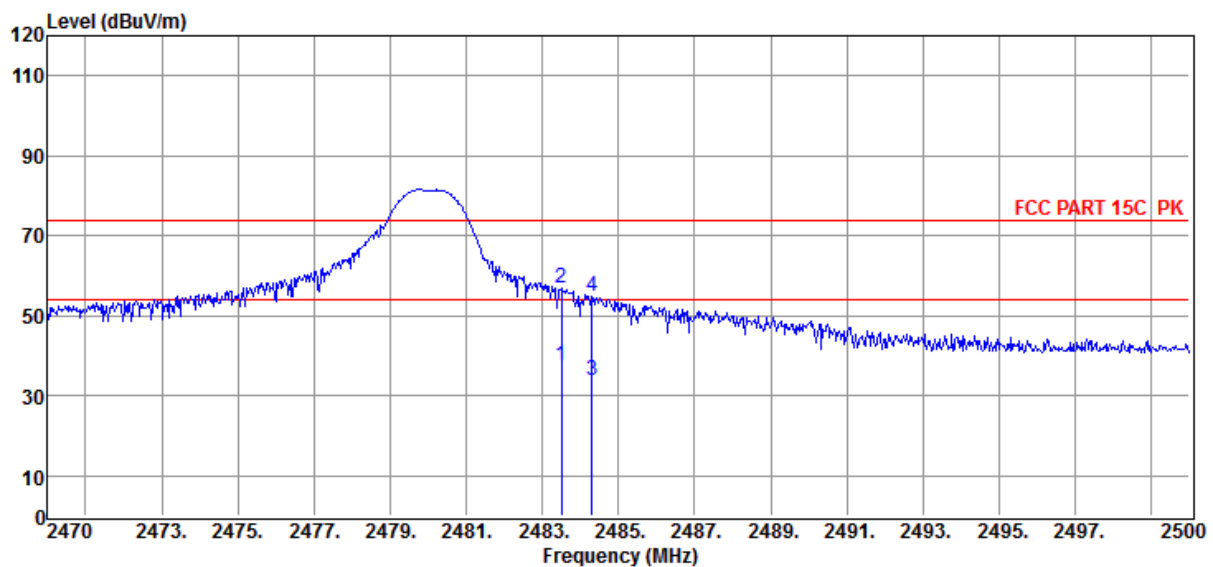


| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m<br>) | Limit<br>Line<br>(dBμV<br>/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|---------------------------------|-------------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 49.35                   | 27.34                       | 44.32               | 5.21                | 37.58                           | 54.00                         | -16.42                | Average  | HORIZONTAL   |
| 2              | 2483.50        | 68.49                   | 27.34                       | 44.32               | 5.21                | 56.72                           | 74.00                         | -17.28                | Peak     | HORIZONTAL   |
| 3              | 2484.31        | 45.46                   | 27.34                       | 44.32               | 5.21                | 33.69                           | 54.00                         | -20.31                | Average  | HORIZONTAL   |
| 4              | 2484.31        | 66.55                   | 27.34                       | 44.32               | 5.21                | 54.78                           | 74.00                         | -19.22                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 11. Power Line Conducted Emission

### 11.1. Block diagram of test setup

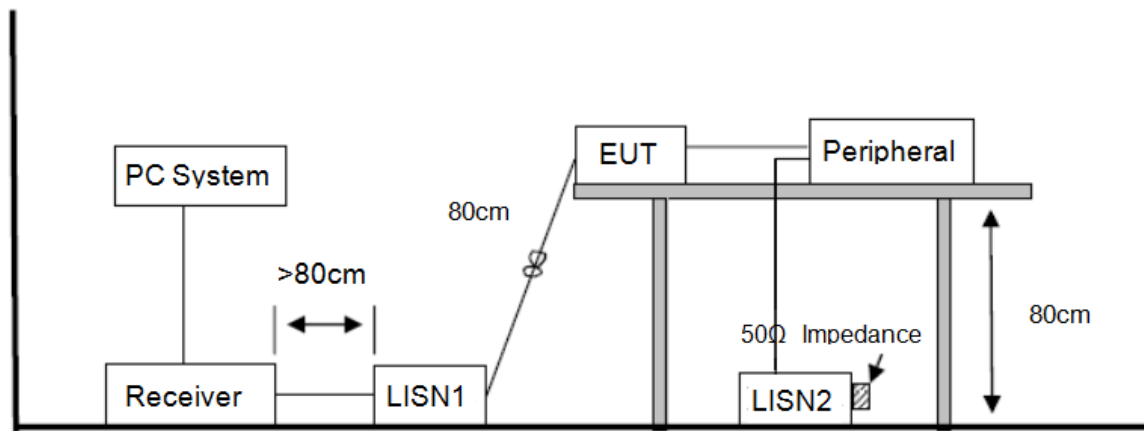

### 11.2. Power Line Conducted Emission Limits

| Frequency       | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
|-----------------|----------------------------------|-------------------------------|
| 150kHz ~ 500kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500kHz ~ 5MHz   | 56                               | 46                            |
| 5MHz ~ 30MHz    | 60                               | 50                            |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 11.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### **11.4. Test Result**

**PASS. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means Peak detection; “-----” means Average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **D:\2018 CE report data\Q18092604-1E\CE.EM6**  
**Test Date** : 2018-09-30 **Tested By** : Open  
**EUT** : Portable Bluetooth Speaker **Model Number** : ESQUIRE MINI2  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx mode  
**Condition** : Temp:24.5°C, Humi:55.5%,  
 Press:100.1kPa **LISN** : 2017 ENV216/NEUTRAL  
**Memo** :

Data: 34

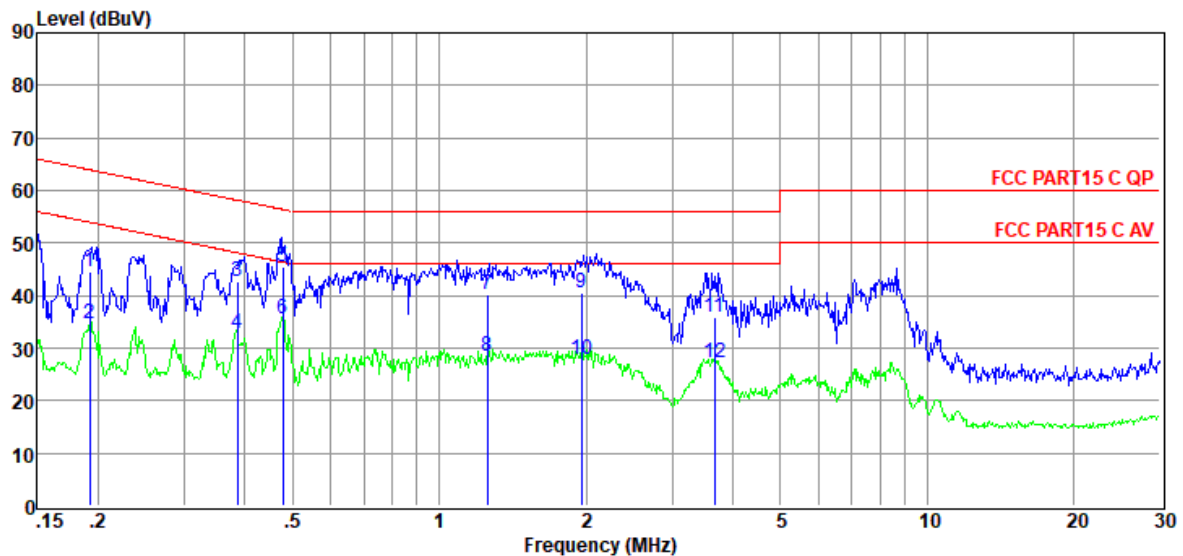

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase   |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|---------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |         |
| 1      | 0.19  | 25.18      | 9.45        | 0.04       | 9.86                 | 44.53        | 63.93      | -19.40     | QP       | NEUTRAL |
| 2      | 0.19  | 15.21      | 9.45        | 0.04       | 9.86                 | 34.56        | 53.93      | -19.37     | Average  | NEUTRAL |
| 3      | 0.39  | 23.30      | 9.37        | 0.04       | 9.83                 | 42.54        | 58.17      | -15.63     | QP       | NEUTRAL |
| 4      | 0.39  | 13.56      | 9.37        | 0.04       | 9.83                 | 32.80        | 48.17      | -15.37     | Average  | NEUTRAL |
| 5      | 0.48  | 26.17      | 9.35        | 0.04       | 9.81                 | 45.37        | 56.36      | -10.99     | QP       | NEUTRAL |
| 6      | 0.48  | 16.38      | 9.35        | 0.04       | 9.81                 | 35.58        | 46.36      | -10.78     | Average  | NEUTRAL |
| 7      | 1.26  | 20.89      | 9.29        | 0.13       | 9.86                 | 40.17        | 56.00      | -15.83     | QP       | NEUTRAL |
| 8      | 1.26  | 9.30       | 9.29        | 0.13       | 9.86                 | 28.58        | 46.00      | -17.42     | Average  | NEUTRAL |
| 9      | 1.96  | 21.33      | 9.28        | 0.12       | 9.87                 | 40.60        | 56.00      | -15.40     | QP       | NEUTRAL |
| 10     | 1.96  | 8.46       | 9.28        | 0.12       | 9.87                 | 27.73        | 46.00      | -18.27     | Average  | NEUTRAL |
| 11     | 3.66  | 16.76      | 9.27        | 0.11       | 9.87                 | 36.01        | 56.00      | -19.99     | QP       | NEUTRAL |
| 12     | 3.66  | 7.95       | 9.27        | 0.11       | 9.87                 | 27.20        | 46.00      | -18.80     | Average  | NEUTRAL |

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **D:\2018 CE report data\Q18092604-1E\CE.EM6**  
**Test Date** : 2018-09-30 **Tested By** : Open  
**EUT** : Portable Bluetooth Speaker **Model Number** : ESQUIRE MINI2  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx mode  
**Condition** : Temp:24.5°C, Humi:55.5%,  
 Press:100.1kPa **LISN** : 2017 ENV216/LINE  
**Memo** :

Data: 36

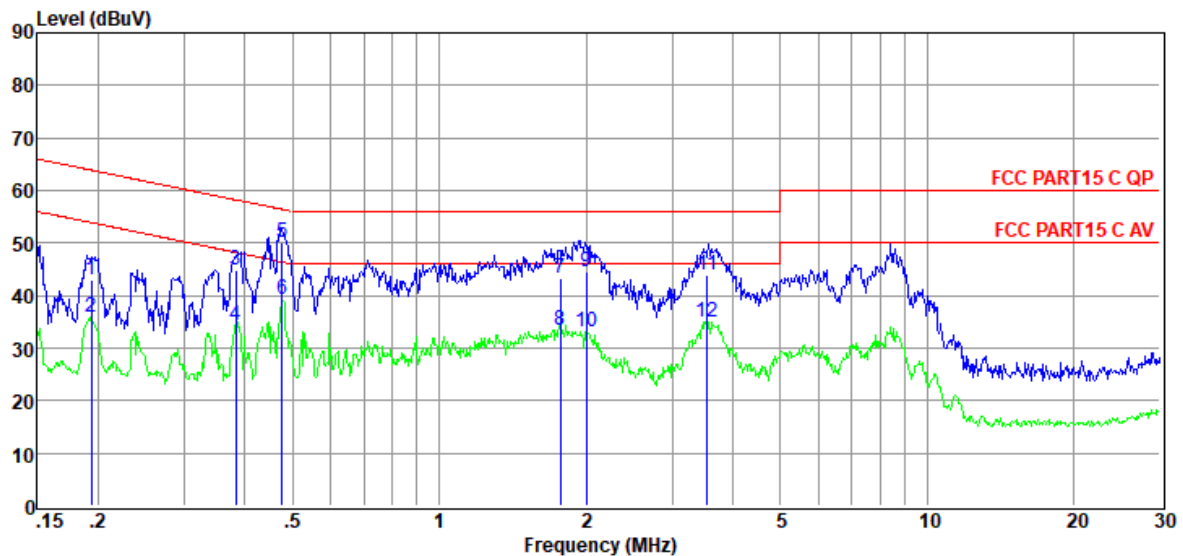

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|-------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |       |
| 1      | 0.19  | 23.65      | 9.51        | 0.04       | 9.86                 | 43.06        | 63.89      | -20.83     | QP       | LINE  |
| 2      | 0.19  | 16.43      | 9.51        | 0.04       | 9.86                 | 35.84        | 53.89      | -18.05     | Average  | LINE  |
| 3      | 0.38  | 25.33      | 9.53        | 0.04       | 9.83                 | 44.73        | 58.21      | -13.48     | QP       | LINE  |
| 4      | 0.38  | 15.01      | 9.53        | 0.04       | 9.83                 | 34.41        | 48.21      | -13.80     | Average  | LINE  |
| 5      | 0.48  | 30.80      | 9.54        | 0.04       | 9.81                 | 50.19        | 56.41      | -6.22      | QP       | LINE  |
| 6      | 0.48  | 19.82      | 9.54        | 0.04       | 9.81                 | 39.21        | 46.41      | -7.20      | Average  | LINE  |
| 7      | 1.77  | 23.58      | 9.60        | 0.13       | 9.87                 | 43.18        | 56.00      | -12.82     | QP       | LINE  |
| 8      | 1.77  | 13.78      | 9.60        | 0.13       | 9.87                 | 33.38        | 46.00      | -12.62     | Average  | LINE  |
| 9      | 2.00  | 24.88      | 9.60        | 0.12       | 9.87                 | 44.47        | 56.00      | -11.53     | QP       | LINE  |
| 10     | 2.00  | 13.46      | 9.60        | 0.12       | 9.87                 | 33.05        | 46.00      | -12.95     | Average  | LINE  |
| 11     | 3.55  | 24.31      | 9.63        | 0.11       | 9.87                 | 43.92        | 56.00      | -12.08     | QP       | LINE  |
| 12     | 3.55  | 15.21      | 9.63        | 0.11       | 9.87                 | 34.82        | 46.00      | -11.18     | Average  | LINE  |

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



## **12. Antenna Requirements**

### **12.1. Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2. Result**

The antennas used for this product is integrated antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 3.51dBi.

**END OF REPORT**