

Appendix B

Detailed Test Results

BT for Body

Test Laboratory: SGS-SAR Lab

GRIPD Bluetooth DH5 2402 Top side 0mm

DUT: GRIPD; Type: GRIPD;

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2402$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 38.353$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.32, 7.85, 7.73); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2025/1/20
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0947 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.564 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.0921 W/kg

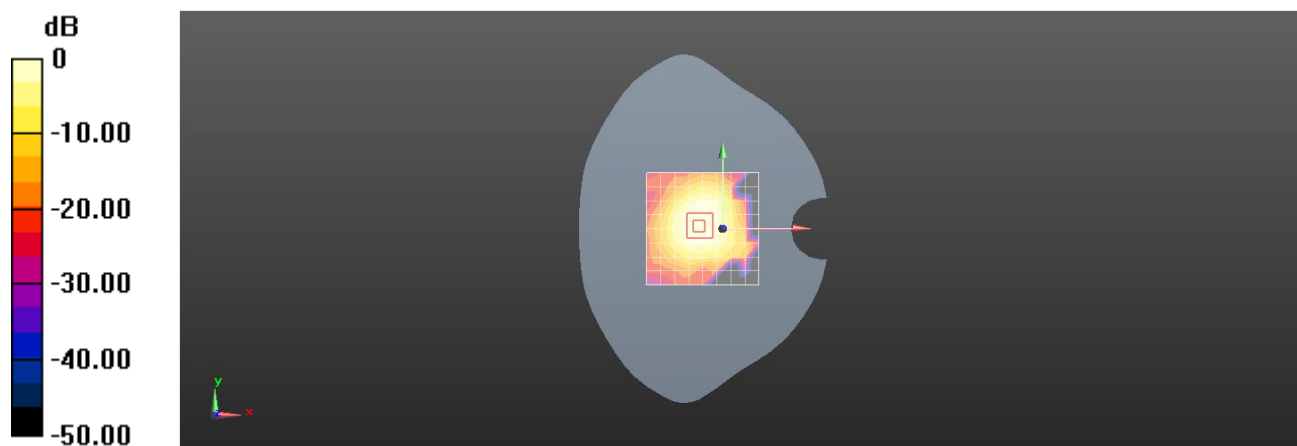

0 dB = 0.0947 W/kg = -10.24 dBW/kg