

Appendix B

Highest Test Plots

Table of Contents

1. 2.4G Head-worn 0mm SAR..... 3

1. 2.4G Head-worn 0mm SAR

Date: 09.06.2025

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q25042811-2E

Serial: S25042811-008

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth, Frequency: 2441 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2441$ MHz, $\sigma = 1.735$ S/m, $\epsilon_r = 38.525$, $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ComF(7.9, 7.9, 7.9) @ 2441 MHz; Calibrated: 29.05.2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 28.05.2025
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Top side 2DH5 2441 MHz/Area Scan (11x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.329 W/kg

Configuration/Top side 2DH5 2441 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.421 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.575 W/kg


SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.453 W/kg

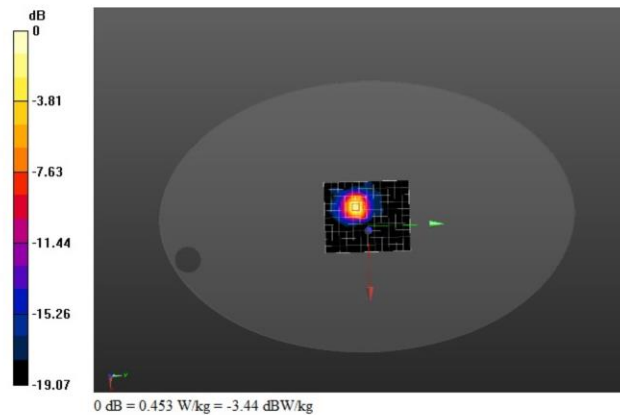

Date: 09.06.2025

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q25042811-2E

Serial: S25042811-008

Communication System: UID 0, Bluetooth (0); Communication System Band: BLE; Frequency: 2404 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2404$ MHz; $\sigma = 1.709$ S/m; $\epsilon_r = 38.565$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ConvF(7.9, 7.9, 7.9) @ 2404 MHz; Calibrated: 29.05.2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 28.05.2025
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Top side SRD 2404 MHz/Area Scan (11x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.228 W/kg

Configuration/Top side SRD 2404 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.957 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.249 W/kg

