

QUICK START GUIDE

CINEMA SB510

JBL


HARMAN

WHAT'S IN THE BOX




* Power cord quantity and plug type vary by regions.



WALL MOUNTING

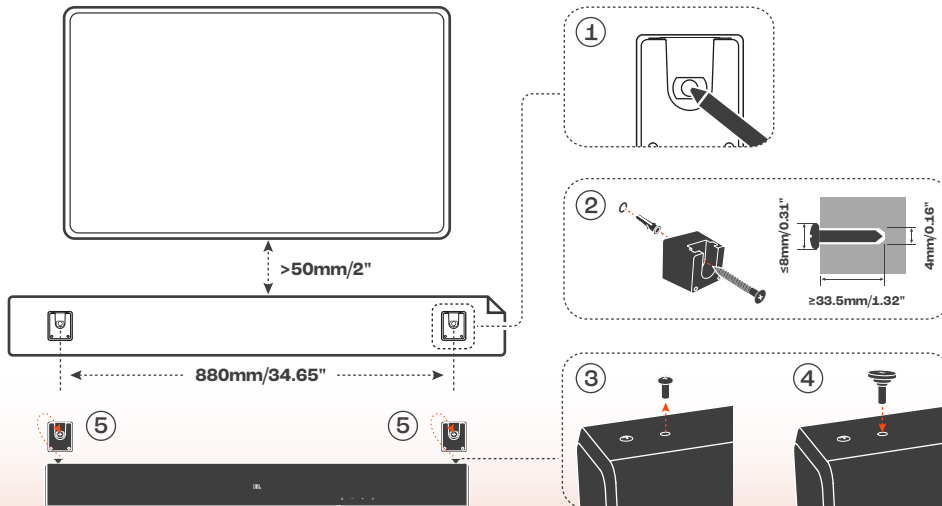


CONNECT

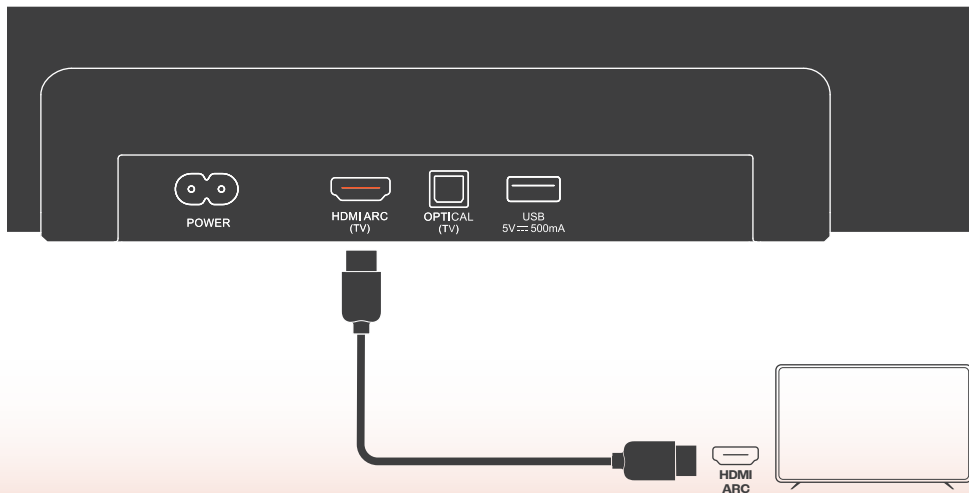

CONNECT

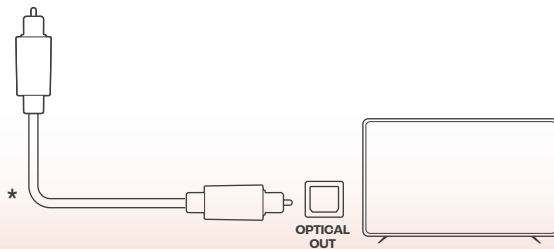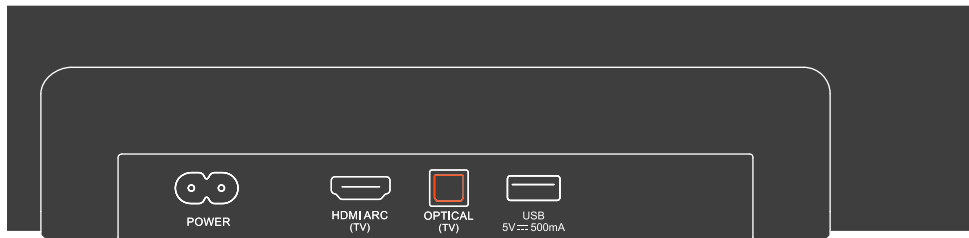

POWER ON



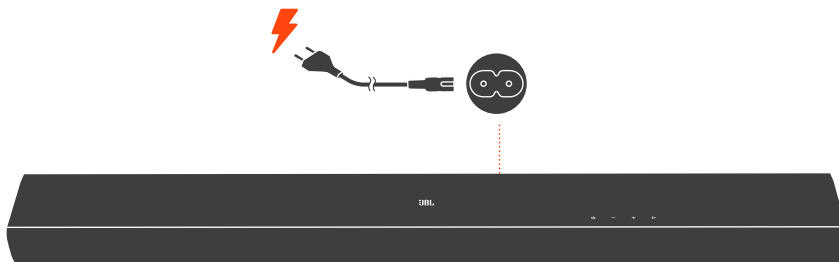


The soundbar automatically goes to standby after 10 minutes of inactivity.


BLUETOOTH PAIRING



Connecting | Connected



OWNER'S MANUAL DOWNLOAD

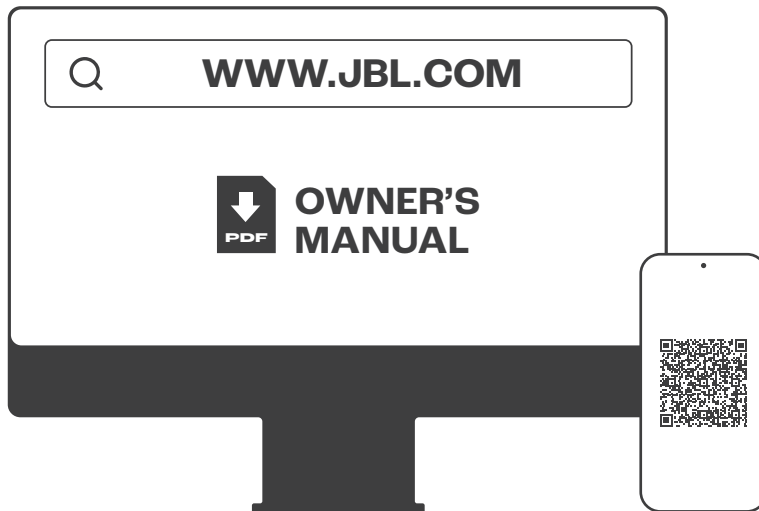

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3

- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz
- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

FR

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

DA

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

General specification

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

DE

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

ES

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

ES-MX

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

FI

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

IT

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

NL

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

NO

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

PL

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

PT

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

PT-BR

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

SK

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

SV

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

RU

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

ZH-CN

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

ZH-TW

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

ID

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

MM

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

MM

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~50/60 Hz
- Total speaker power output (Max. @THD 1%): 200 W
- Soundbar output power (Max. @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

MP3 bitrate:

- MPEG 1 Layer 1: 32 kbps - 448 kbps;
- MPEG 1 Layer 2: 32 kbps - 384 kbps;
- MPEG 1 Layer 3: 32 kbps - 320 kbps;
- MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
- MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

KO

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

AR

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

General specification

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs

HE

WHAT'S IN THE BOX

* Power cord quantity and plug type vary by regions.

WALL MOUNTING

CONNECT

POWER ON

TECH SPEC

General specification

- Model: CINEMA SB510 (soundbar unit)
- Sound system: 3.1 channel
- Power supply: 100 - 240 V AC, ~ 50/60 Hz
- Total speaker power output (Max @THD 1%): 200 W
- Soundbar output power (Max @THD 1%): 150 W
- Subwoofer output power (Max. @THD 1%): 50 W
- Soundbar transducer: 3x (45 x 80) mm racetrack drivers
- Subwoofer transducer: 1x (70 x 88) mm, built-in subwoofer
- Standby power: < 0.5 W
- Operating temperature: 0°C - 45 °C

HDMI specification

- HDMI ARC (Audio Return Channel): 1
- HDMI HDCP version: 1.4

Audio specification

- Frequency response: 55 Hz - 20 kHz (-10 dB)
- Audio inputs: 1 Optical, Bluetooth and USB (USB playback is available in US version. For other versions, USB is for Service only.)

USB specification

- USB port: Type A
- USB rating: 5 V DC, 0.5 A
- Supporting file formats: mp3
- MP3 codec: MPEG 1 Layer 2/3, MPEG 2 Layer 3, MPEG 2.5 Layer 3
- MP3 sampling rate: 16 - 48 kHz

The soundbar automatically goes to standby after 10 minutes of inactivity.

BLUETOOTH PAIRING

Connecting | Connected

OWNER'S MANUAL DOWNLOAD

- MP3 bitrate:
 - MPEG 1 Layer 1: 32 kbps - 448 kbps;
 - MPEG 1 Layer 2: 32 kbps - 384 kbps;
 - MPEG 1 Layer 3: 32 kbps - 320 kbps;
 - MPEG 2/2.5 Layer 1: 32 kbps - 256 kbps;
 - MPEG 2/2.5 Layer 2/3: 8 kbps - 160 kbps

Wireless specification

- Bluetooth version: 5.3
- Bluetooth profile: A2DP 1.3, AVRCP 1.6
- Bluetooth transmitter frequency range: 2400 MHz - 2483.5 MHz
- Bluetooth Max. transmitting power: <10 dBm (EIRP)
- Bluetooth modulation: GFSK, π/4 DQPSK

Dimensions

- Soundbar dimensions (W x H x D): 950 x 67 x 105 mm / 37.4" x 2.6" x 4.1"
- Soundbar weight: 3.5 kg / 7.7 lbs
- Packaging dimensions (W x H x D): 1108 x 114 x 162 mm / 43.6" x 4.5" x 6.4"
- Packaging weight: 5.0 kg / 11.0 lbs



Este produto está homologado pela Anatel, de acordo com os procedimentos regulamentados para avaliação da conformidade de produtos para telecomunicações e atende aos requisitos técnicos aplicados.

Para maiores informações, consulte o site da Anatel – www.anatel.gov.br

Este equipamento não tem direito à proteção contra interferência prejudicial não pode causar interferência em sistemas devidamente autorizados.

Atenção: conforme lei brasileira nº 11.291, a exposição prolongada a ruídos superiores a 85dB pode causar danos ao sistema auditivo.



This equipment is a Class II or double insulated electrical appliance.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HARMAN International Industries, Incorporated is under license. Other trademarks and trade names are those of their respective owners.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.



FR

Cet appareil,
ses accessoires
et cordons
se recyclent

REPRISE
À LA LIVRAISON



OU

À DÉPOSER
EN MAGASIN



OU

À DÉPOSER
EN DÉCHÈTERIE



Points de collecte sur www.quefairedemesdechets.fr



HA_JBL_Bar Cinema SB510_QSG_Global_SOP_V7