



## FCC AND ISED CERTIFICATION TEST REPORT

<b>Applicant</b>	:	Harman International Industries, Inc.
<b>Address of Applicant</b>	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
<b>Manufacturer</b>	:	Harman International Industries, Inc.
<b>Address of Manufacturer</b>	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
<b>Equipment under Test</b>	:	BLUETOOTH HEADSET
<b>Model No.</b>	:	SOUNDGEAR CLIPS
<b>FCC ID</b>	:	APIJBLSGCLIPS
<b>IC</b>	:	6132A-JBLSGCLIPS
<b>Test Standard(s)</b>	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
<b>Report No.</b>	:	DDT-RE25030330-1E02
<b>Issue Date</b>	:	2025/07/02
<b>Issue By</b>	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

# REPORT

## Table of Contents

1.	Summary of Test Results .....	7
2.	General Test Information .....	8
2.1.	Description of EUT .....	8
2.2.	Accessories of EUT .....	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode .....	9
2.5.	Deviations of test standard .....	10
2.6.	Test environment conditions.....	10
2.7.	Test laboratory .....	10
2.8.	Measurement uncertainty .....	11
3.	Equipment Used During Conductive Test .....	12
4.	6 dB Bandwidth.....	13
4.1.	Block diagram of test setup .....	13
4.2.	Limits.....	13
4.3.	Test procedure.....	13
4.4.	Test result .....	14
4.5.	Test graphs .....	15
5.	99% Bandwidth .....	19
5.1.	Block diagram of test setup .....	19
5.2.	Limits.....	19
5.3.	Test procedure.....	19
5.4.	Test result .....	20
5.5.	Test graphs .....	21
6.	Maximum Peak Output Power.....	25
6.1.	Block diagram of test setup .....	25
6.2.	Limits.....	25
6.3.	Test procedure.....	25
6.4.	Test result .....	26
6.5.	Test graphs .....	27
7.	Power Spectral Density .....	31
7.1.	Block diagram of test setup .....	31
7.2.	Limits.....	31
7.3.	Test procedure.....	31
7.4.	Test result .....	32
7.5.	Test graphs .....	33
8.	Band Edge Compliance (Conducted Method).....	37

8.1.	Block diagram of test setup .....	37
8.2.	Limits.....	37
8.3.	Test procedure.....	37
8.4.	Test result .....	38
8.5.	Test graphs.....	39
9.	RF Conducted Spurious Emissions.....	42
9.1.	Block diagram of test setup .....	42
9.2.	Limits.....	42
9.3.	Test procedure.....	42
9.4.	Test result .....	43
9.5.	Test graphs.....	44
10.	Duty Cycle.....	56
10.1.	Block diagram of test setup .....	56
10.2.	Limit.....	56
10.3.	Test procedure.....	56
10.4.	Test result .....	57
10.5.	Test graphs.....	58
11.	Antenna Requirements .....	62
11.1.	Limit.....	62
11.2.	Result.....	62
12.	Radiated Emission.....	63
12.1.	Test equipment .....	63
12.2.	Block diagram of test setup .....	64
12.3.	Limits.....	65
12.4.	Assistant equipment used for test .....	67
12.5.	Test procedure.....	67
12.6.	Test result .....	68
12.7.	Test data .....	69
13.	Band Edge Compliance .....	101
13.1.	Test equipment .....	101
13.2.	Block diagram of test setup .....	102
13.3.	Limits.....	102
13.4.	Assistant equipment used for test .....	102
13.5.	Test procedure.....	102
13.6.	Test result .....	102
13.7.	Test data .....	103
14.	Power Line Conducted Emissions.....	119
14.1.	Test equipment .....	119

14.2. Block diagram of test setup ..... 119

14.3. Limits..... 119

14.4. Assistant equipment used for test ..... 119

14.5. Test procedure..... 120

14.6. Test result ..... 120

14.7. Test data ..... 121

15. Test Setup Photograph..... 123

16. Photos of the EUT ..... 125

## Test Report Declare

<b>Applicant</b>	:	Harman International Industries, Inc.
<b>Address of Applicant</b>	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
<b>Equipment under Test</b>	:	BLUETOOTH HEADSET
<b>Model No.</b>	:	SOUNDGEAR CLIPS
<b>Manufacturer</b>	:	Harman International Industries, Inc.
<b>Address of Manufacturer</b>	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,  
 RSS-247 Issue 3 August 2023,  
 ANSI C63.10:2013,  
 RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

### We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

<b>Report No.:</b>	DDT-RE25030330-1E02		
<b>Date of Receipt:</b>	2025/04/23	<b>Date of Test:</b>	2025/04/23 - 2025/06/10

Created: Bobo Chen	Reviewed: Ella Gong	Approved: Damon Hu
<i>Bobo Chen</i>	<i>Ella Gong</i>	<i>Damon Hu</i>
2025/06/10	2025/07/02	2025/07/02

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

### Revision History

Version	Revision Content	Issue Date	Approved
---	Initial issue	2025/07/02	

## 1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2), RSS-247 Issue 3 clause 5.2(a), RSS-Gen Issue 5 clause 6.7	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3), RSS-247 Issue 3 clause 5.4(d)	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e), RSS-247 Issue 3 clause 5.2(b)	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
7	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
8	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

## 2. General Test Information

### 2.1. Description of EUT

EUT Name	: BLUETOOTH HEADSET
Model Number	: SOUNDGEAR CLIPS
EUT Function Description	: Please reference user manual of this device
Power Supply	: CHARGING CASE: DC 5V from USB cable HEADSET: DC 5V from external charging case CHARGING CASE: DC 3.8V Lithium-ion built-in battery HEADSET: DC 3.85V Lithium-ion built-in battery
Antenna Type	: LDS
Max Antenna Gain(dBi)	: Left side: -2.13 Right side: -3.21

Radio Specification	: Bluetooth LE
Operation Frequency	: 2402 MHz to 2480 MHz
Modulation	: GFSK

Bluetooth LE 1Mbps Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Bluetooth LE 2Mbps Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466

5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	/
13	2428	27	2456	/	/

The channels denoted with the grey background are excluded, because they are primary advertising channel only for the Bluetooth LE 1Mbps according to the Bluetooth Core Specification.


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

## 2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

## 2.3. Block diagram of EUT configuration for test

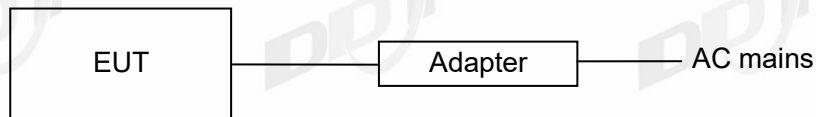

## 2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: wvt\_gui.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table:

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK 1M	5	CH0	2402
	5	CH19	2440
	5	CH39	2480
GFSK 2M	5	CH1	2404
	5	CH19	2440
	5	CH38	2478

## 2.5. Deviations of test standard

No deviation.

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

## 2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com).

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

## 2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 <sup>-8</sup> (Antenna couple method)
	5.5 x 10 <sup>-8</sup> (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10 <sup>-8</sup>
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	168801	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2026/03/28
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2025/08/25
RF Control Unit	Tonscend	JS0806-2	2118060485	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

## 4. 6 dB Bandwidth

### 4.1. Block diagram of test setup

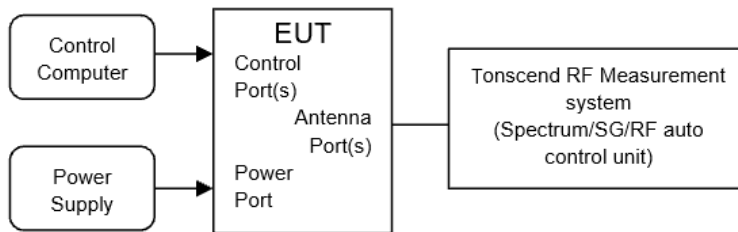

### 4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### 4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:




RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report.

#### 4.4. Test result


Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.8-27.3℃,45.6-49.5%RH	Test Date:	2025.04.24-2025.04.25
Test Power Supply:	Battery	Sample Number:	S25030330-008

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Left side	2402	0.67	2401.66	2402.33	0.5	PASS
	Right side	2402	0.67	2401.65	2402.32	0.5	PASS
	Left side	2440	0.67	2439.66	2440.33	0.5	PASS
	Right side	2440	0.67	2439.65	2440.32	0.5	PASS
	Left side	2480	0.67	2479.66	2480.33	0.5	PASS
	Right side	2480	0.67	2479.65	2480.32	0.5	PASS
BLE_2M	Left side	2404	1.25	2403.34	2404.59	0.5	PASS
	Right side	2404	1.25	2403.34	2404.59	0.5	PASS
	Left side	2440	1.25	2439.34	2440.59	0.5	PASS
	Right side	2440	1.25	2439.33	2440.59	0.5	PASS
	Left side	2478	1.25	2477.35	2478.59	0.5	PASS
	Right side	2478	1.25	2477.33	2478.59	0.5	PASS


4.5. Test graphs

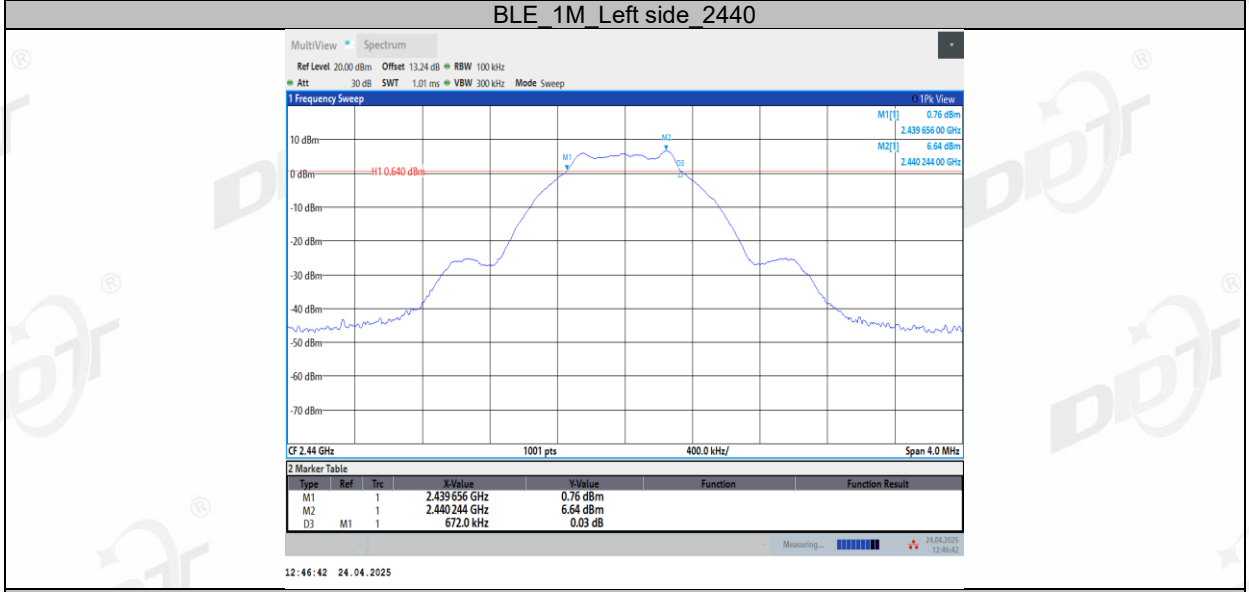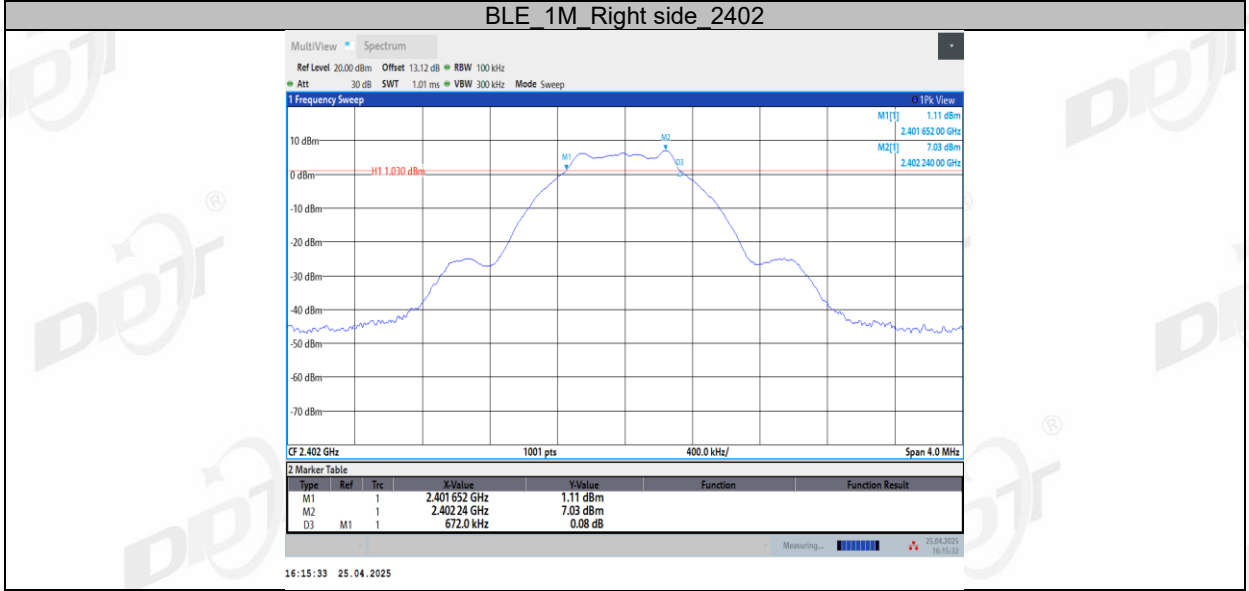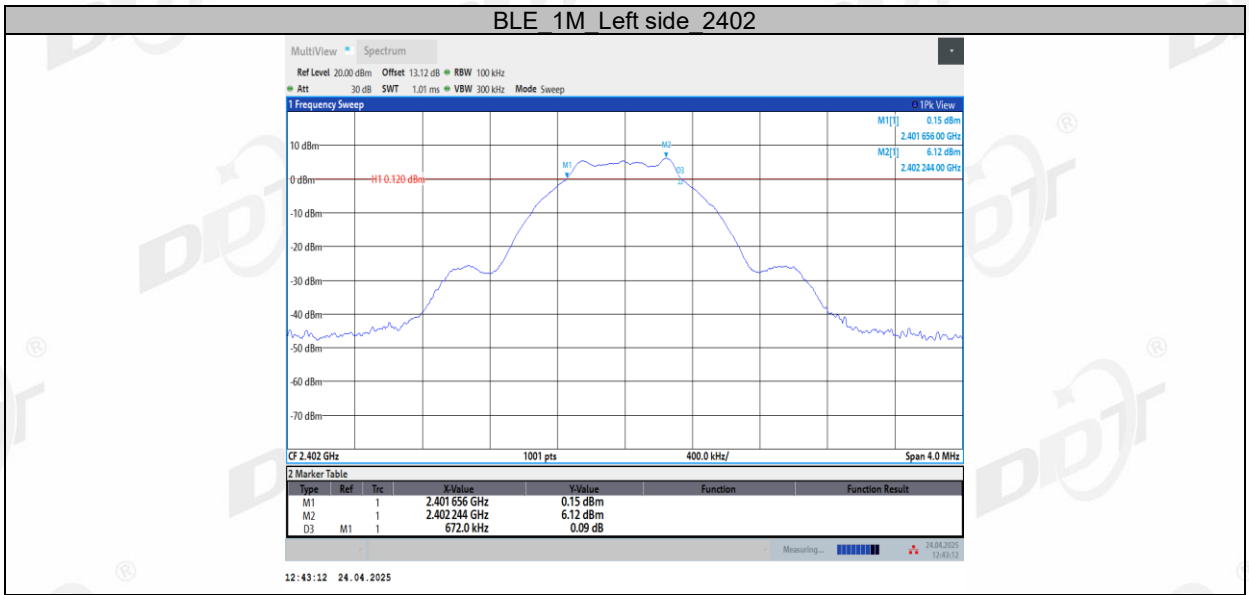


**BLE 1M Right side 2440**

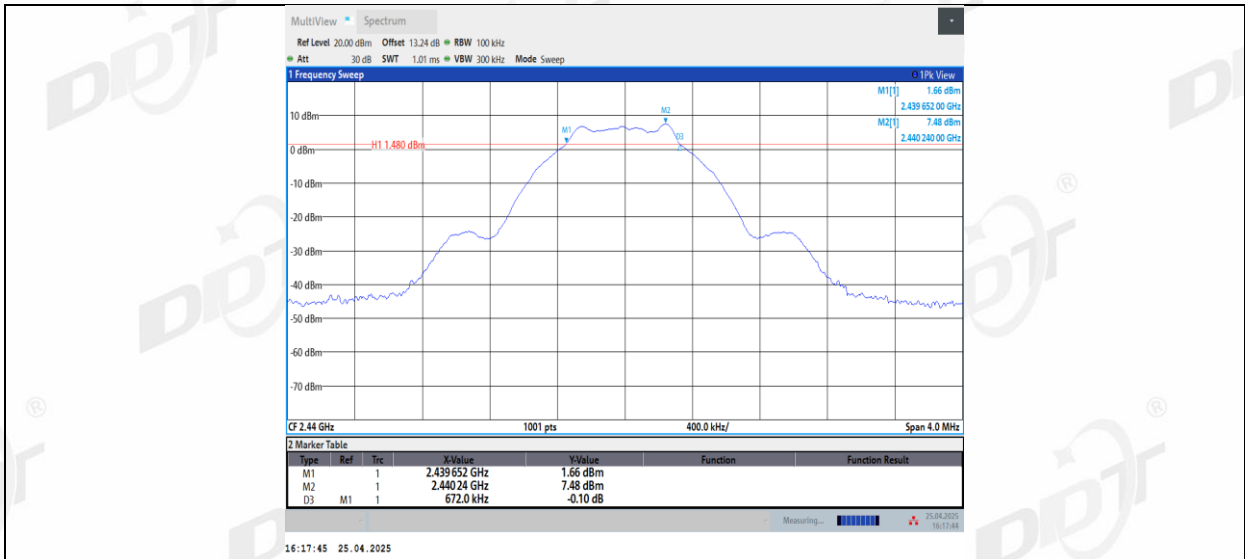


BLE\_1M Left side\_2480

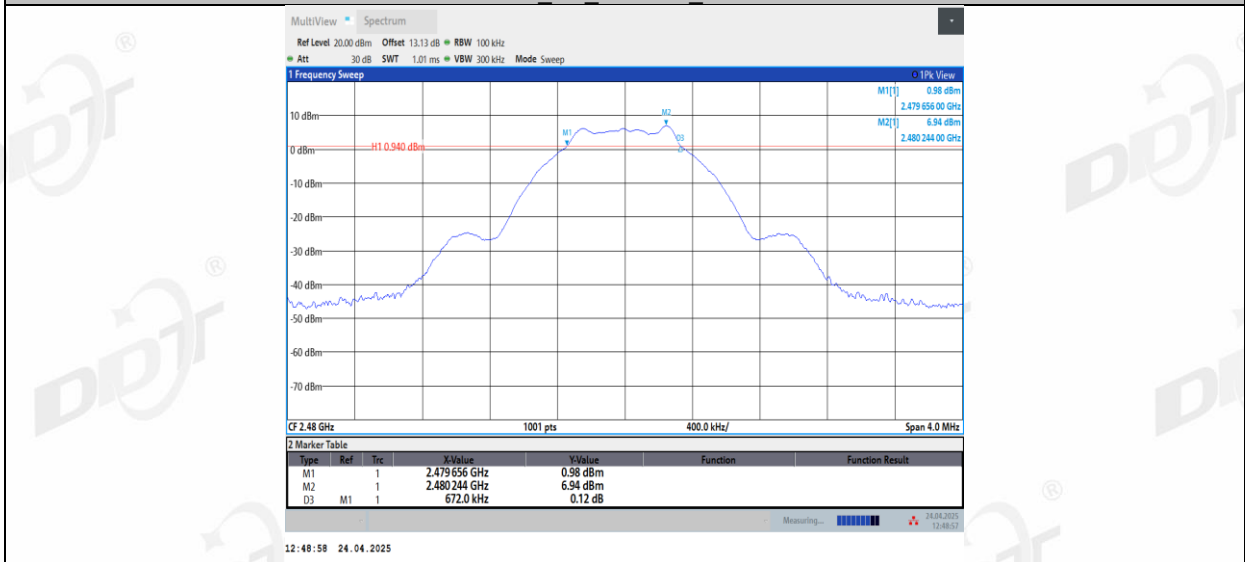


BLE\_1M Right side\_2480

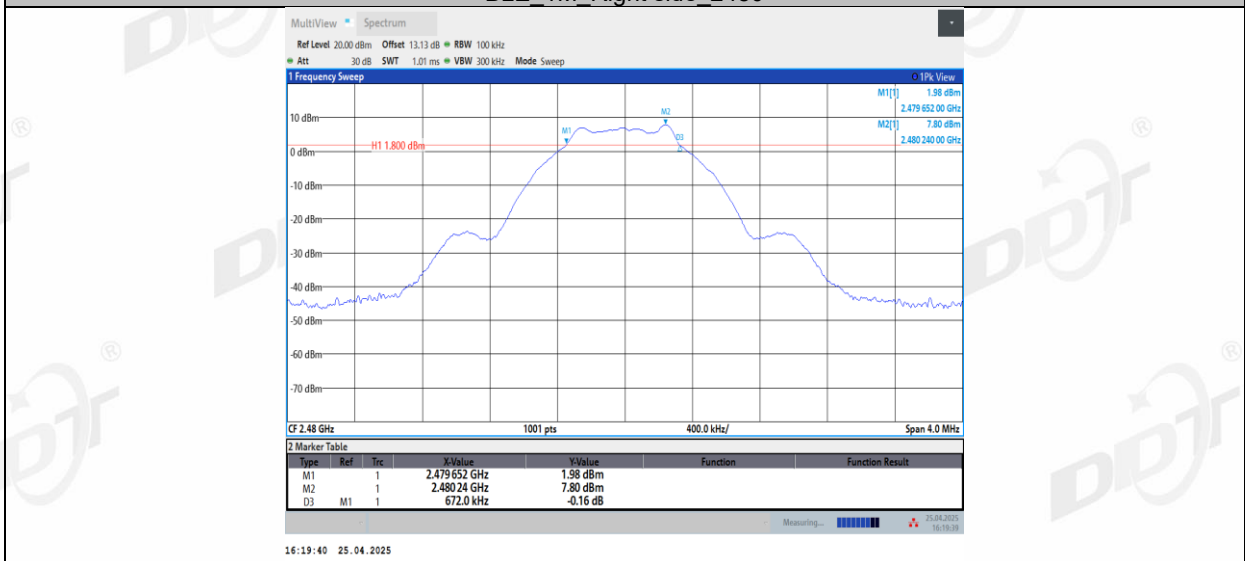


BLE\_2M Left side\_2404

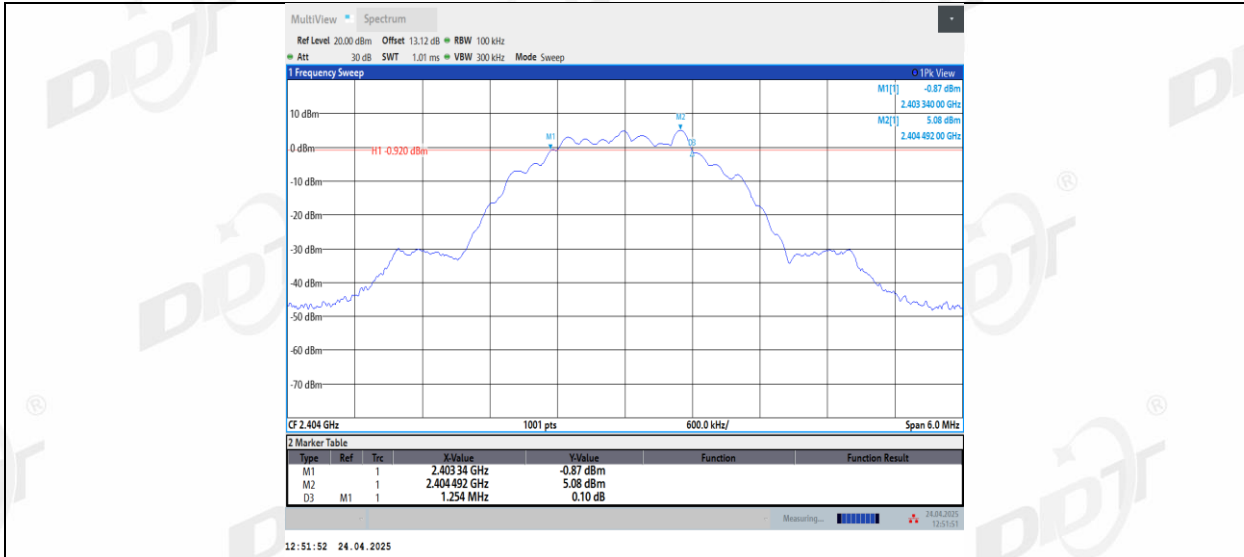


BLE\_2M\_Right side\_2404

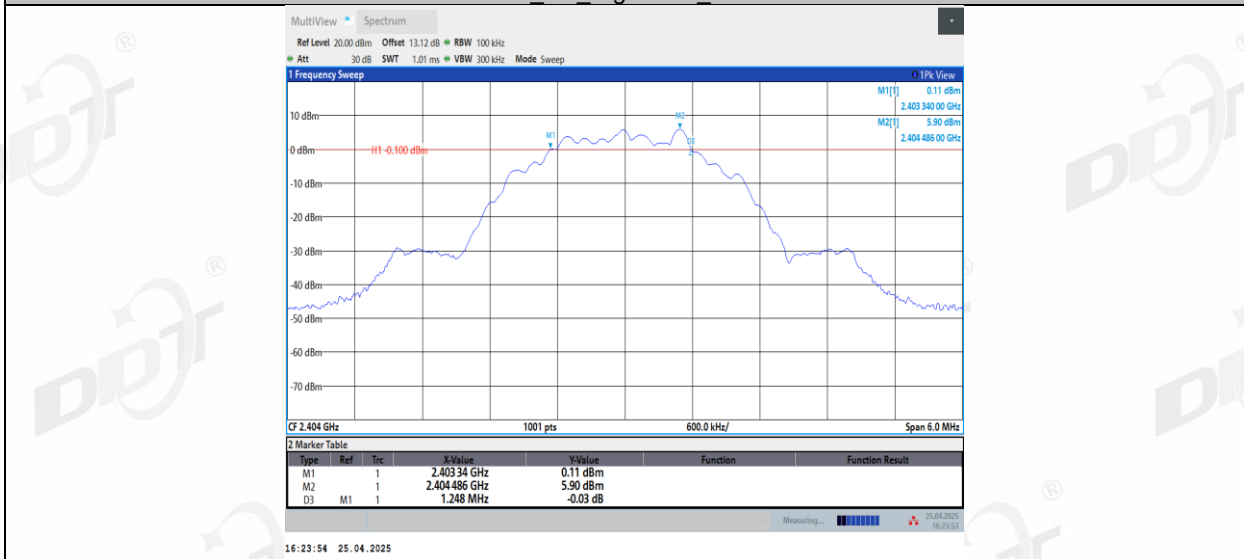


BLE\_2M\_Left side\_2440

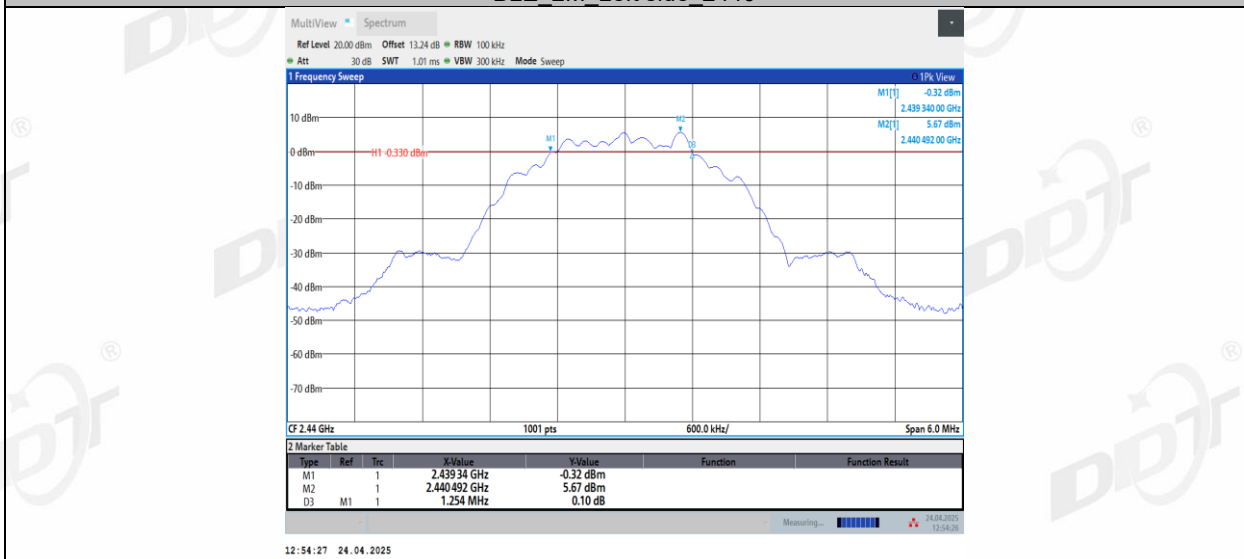


BLE\_2M\_Right side\_2440

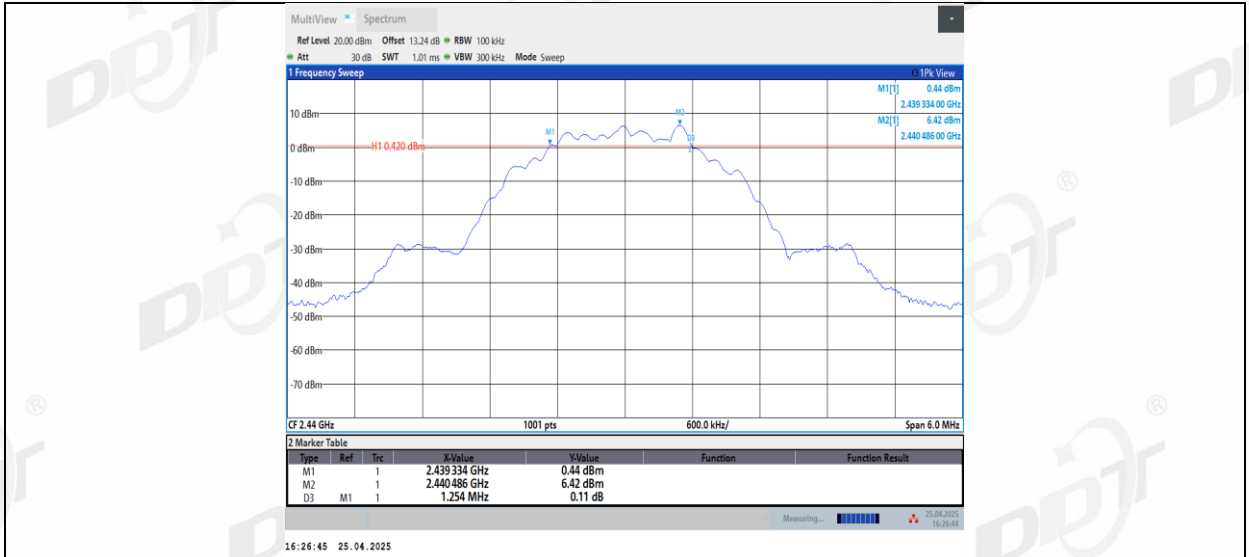

BLE 2M Left side 2478

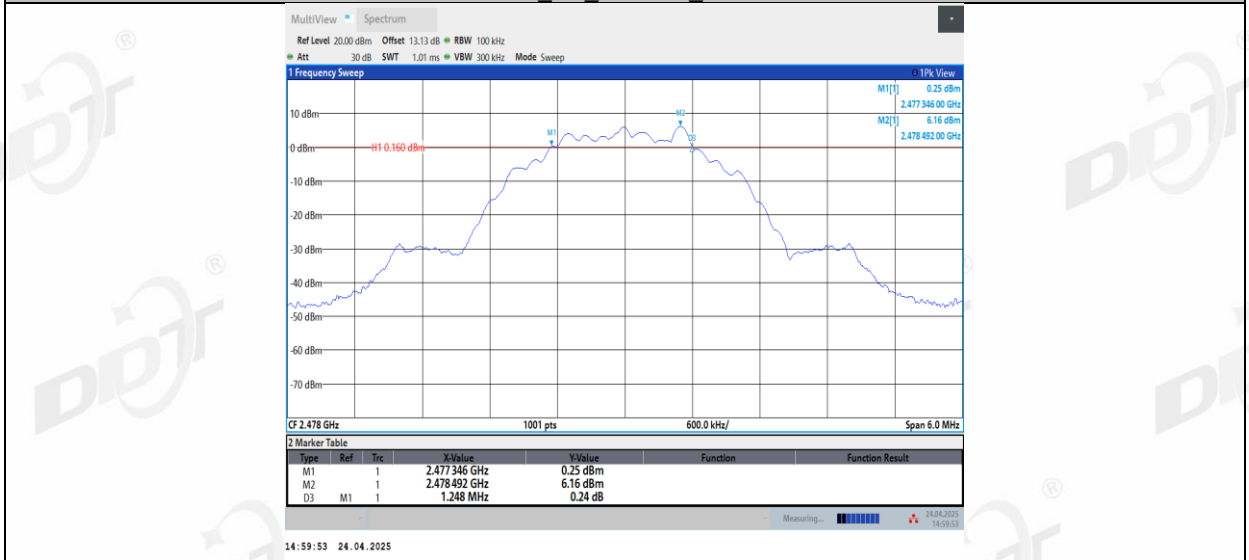


BLE 2M Right side 2478

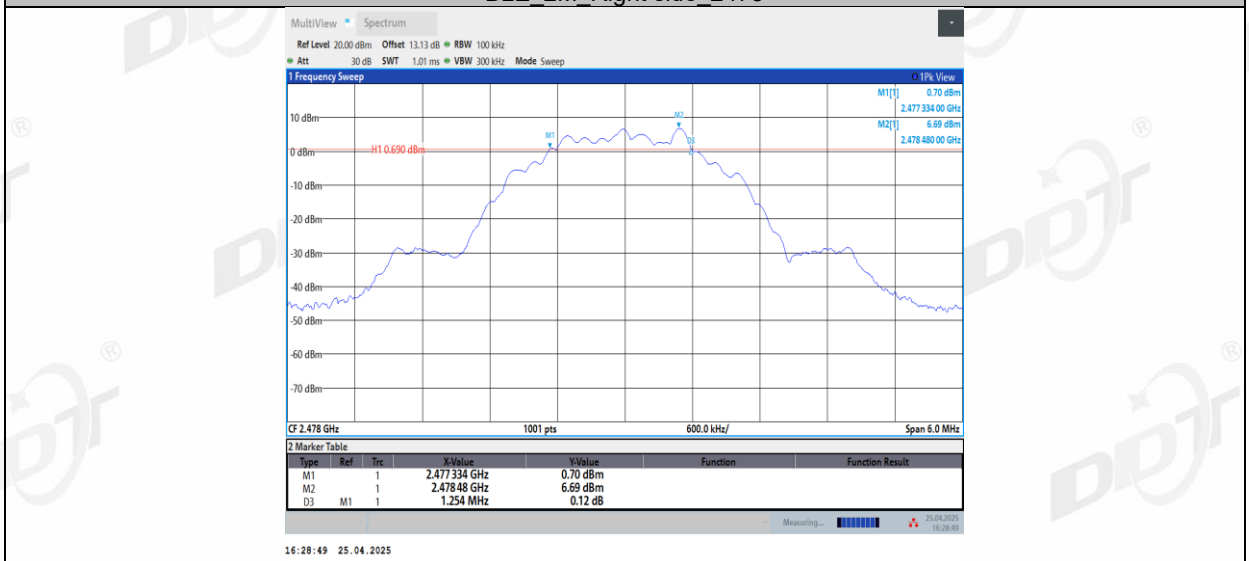

## 5. 99% Bandwidth

### 5.1. Block diagram of test setup

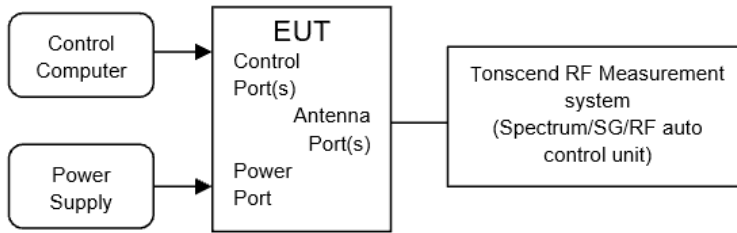

### 5.2. Limits

Just for Report.

### 5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:
 





RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


#### 5.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.8-27.3℃,45.6-49.5%RH	Test Date:	2025.04.24-2025.04.25
Test Power Supply:	Battery	Sample Number:	S25030330-008


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Left side	2402	1.021	2401.4882	2402.5095	---	---
	Right side	2402	1.022	2401.4838	2402.5056	---	---
	Left side	2440	1.022	2439.4878	2440.5096	---	---
	Right side	2440	1.022	2439.4826	2440.5046	---	---
	Left side	2480	1.021	2479.4885	2480.5096	---	---
	Right side	2480	1.023	2479.4826	2480.5055	---	---
BLE_2M	Left side	2404	2.019	2402.9994	2405.0181	---	---
	Right side	2404	2.020	2402.9939	2405.0138	---	---
	Left side	2440	2.019	2438.9986	2441.0180	---	---
	Right side	2440	2.019	2438.9931	2441.0122	---	---
	Left side	2478	2.021	2477.0020	2479.0225	---	---
	Right side	2478	2.020	2476.9945	2479.0142	---	---

5.5. Test graphs

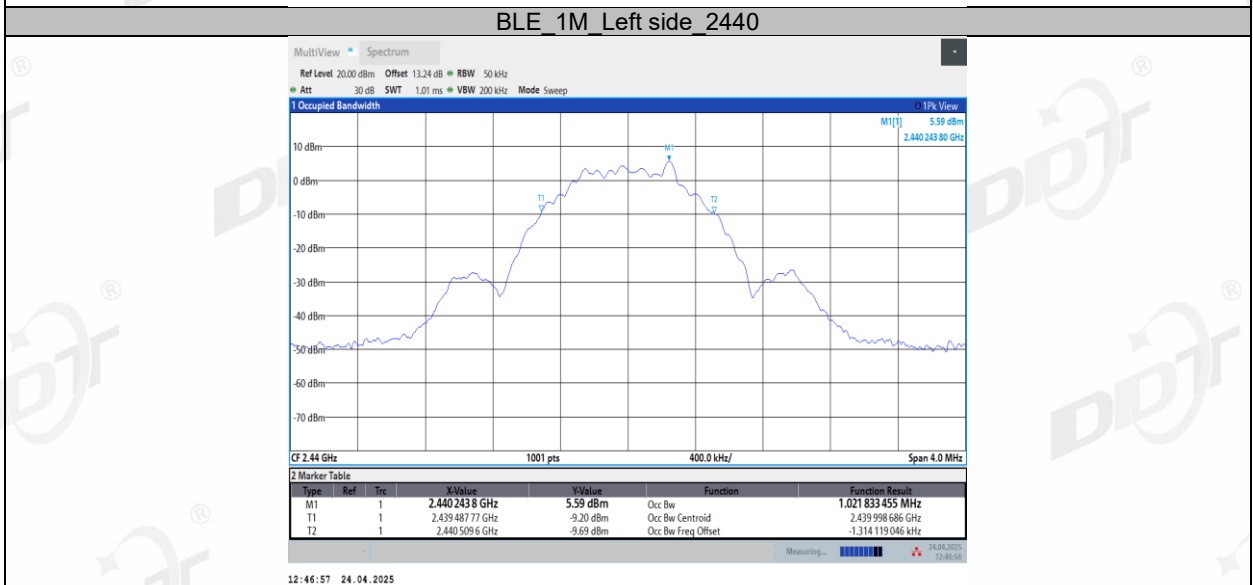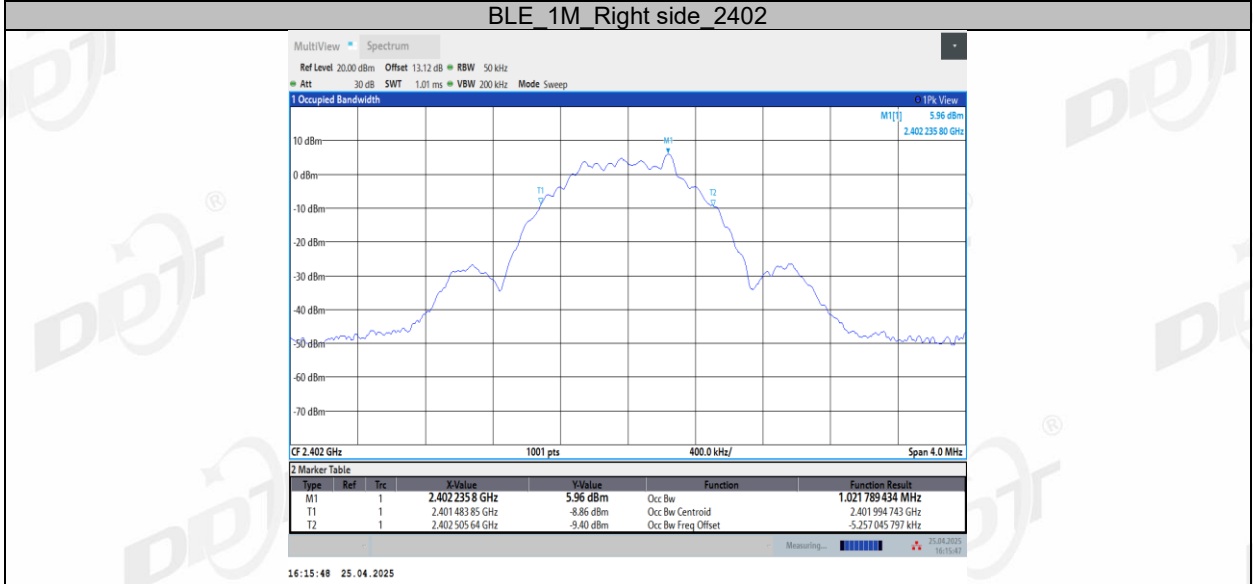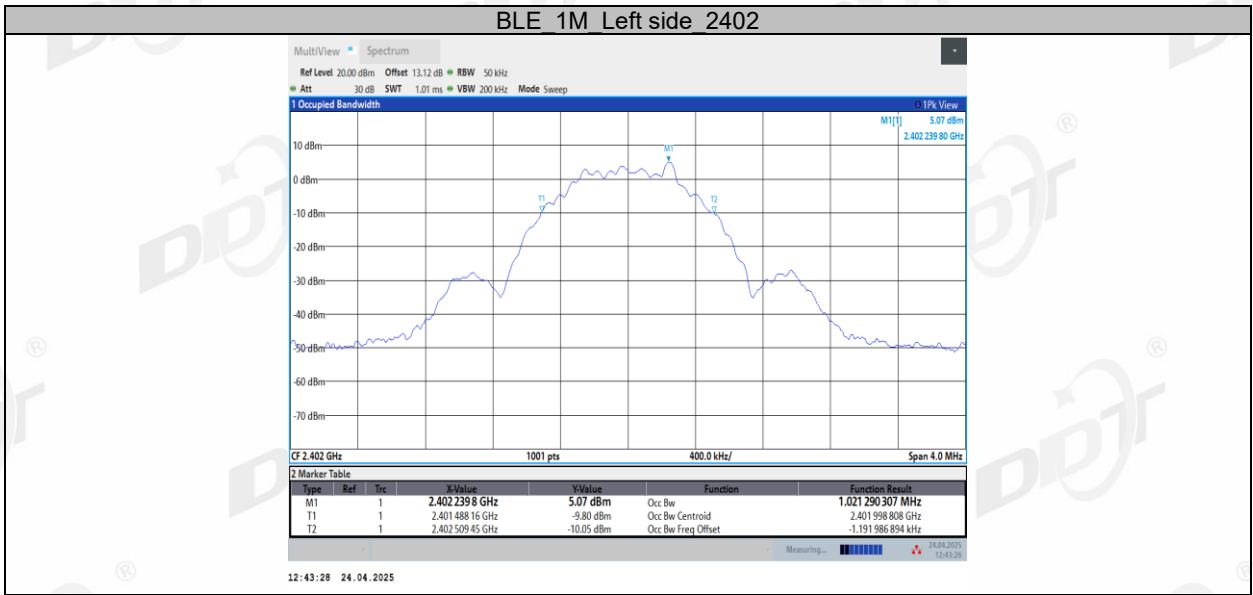


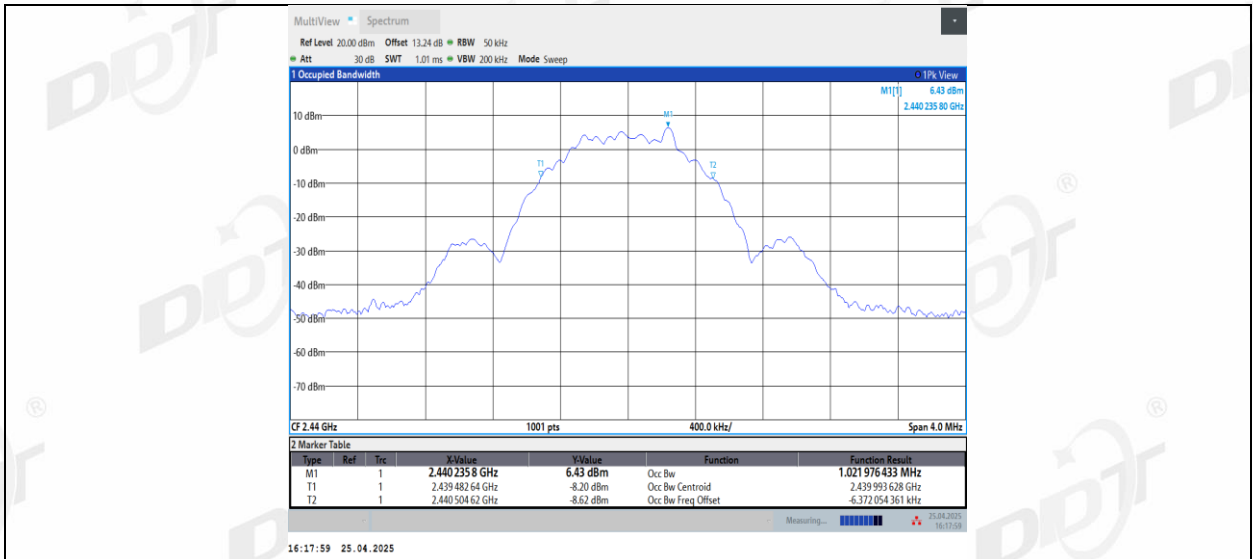


BLE\_1M Left side 2480

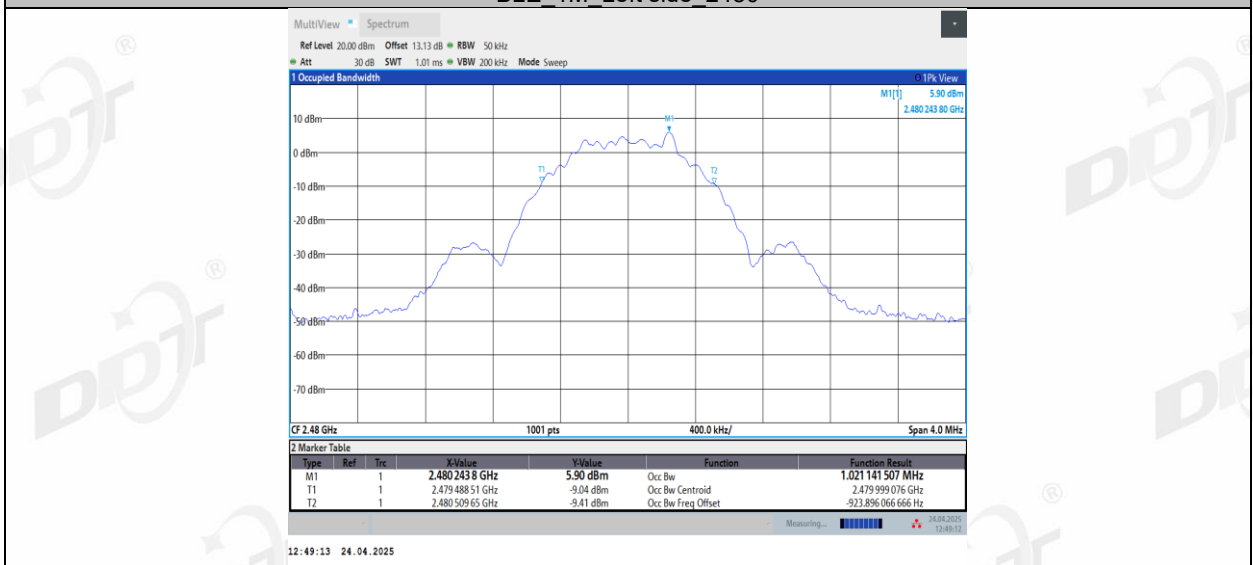


BLE\_1M Right side 2480

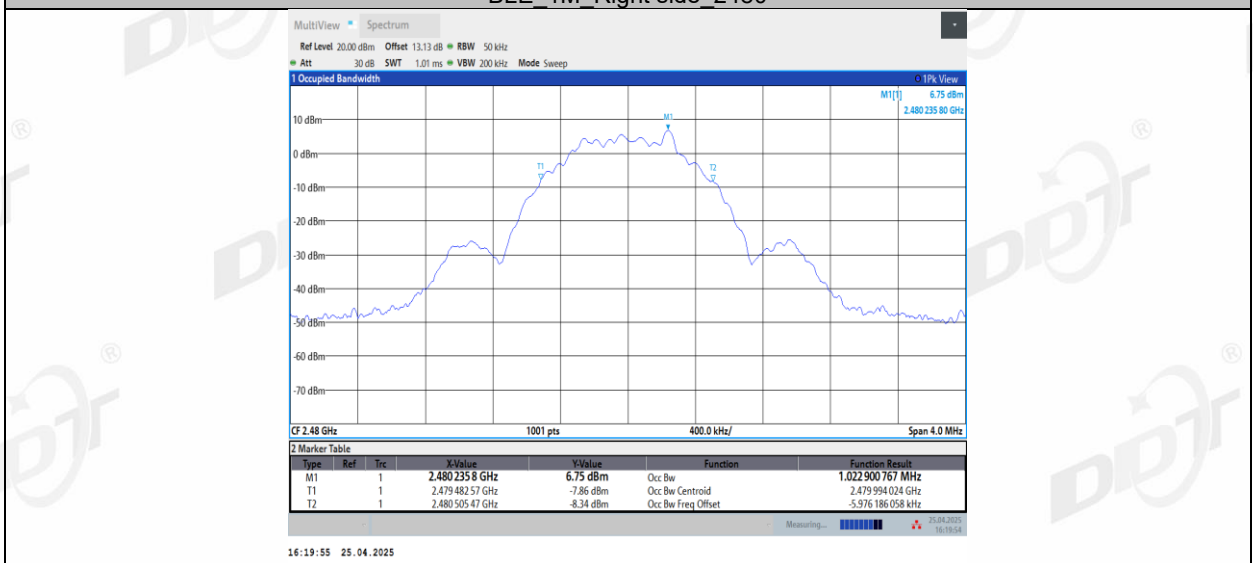


BLE\_2M Left side 2404

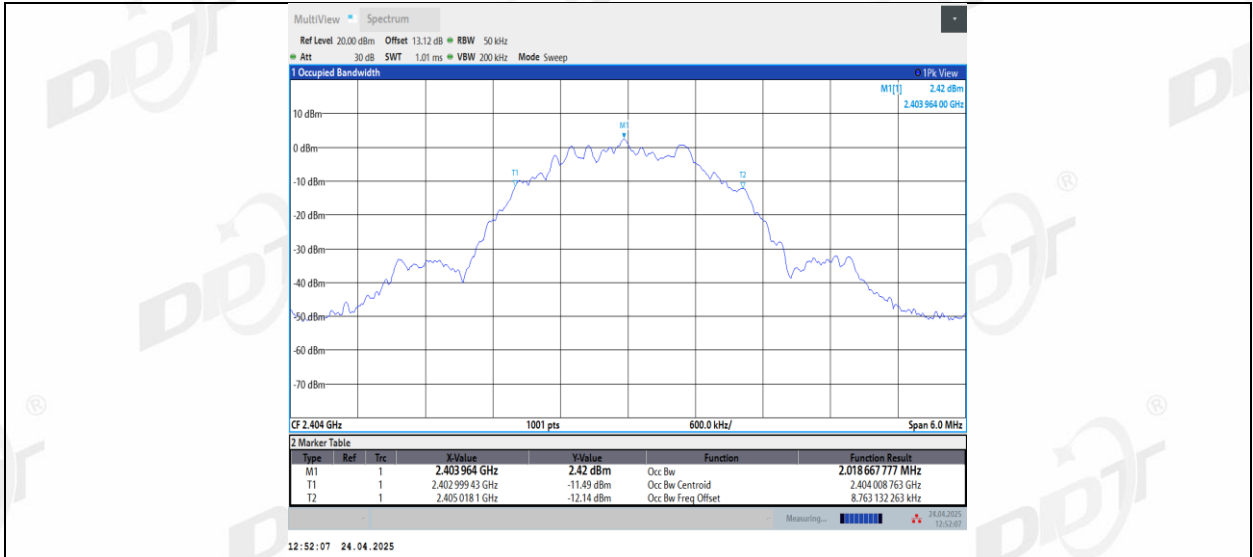


BLE 2M Right side 2404

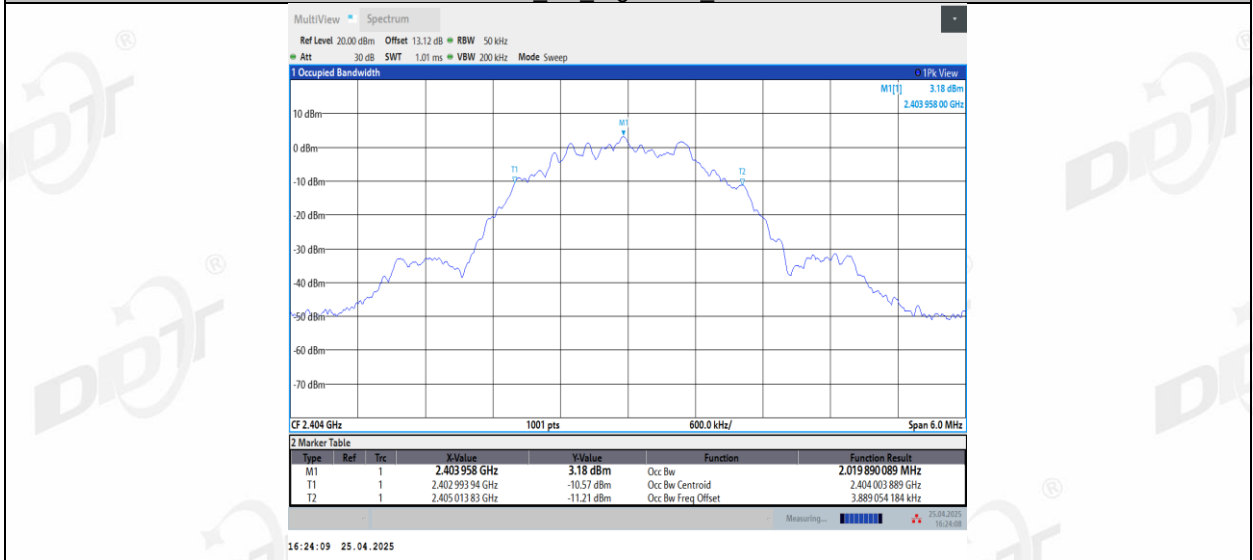


BLE 2M Left side 2440

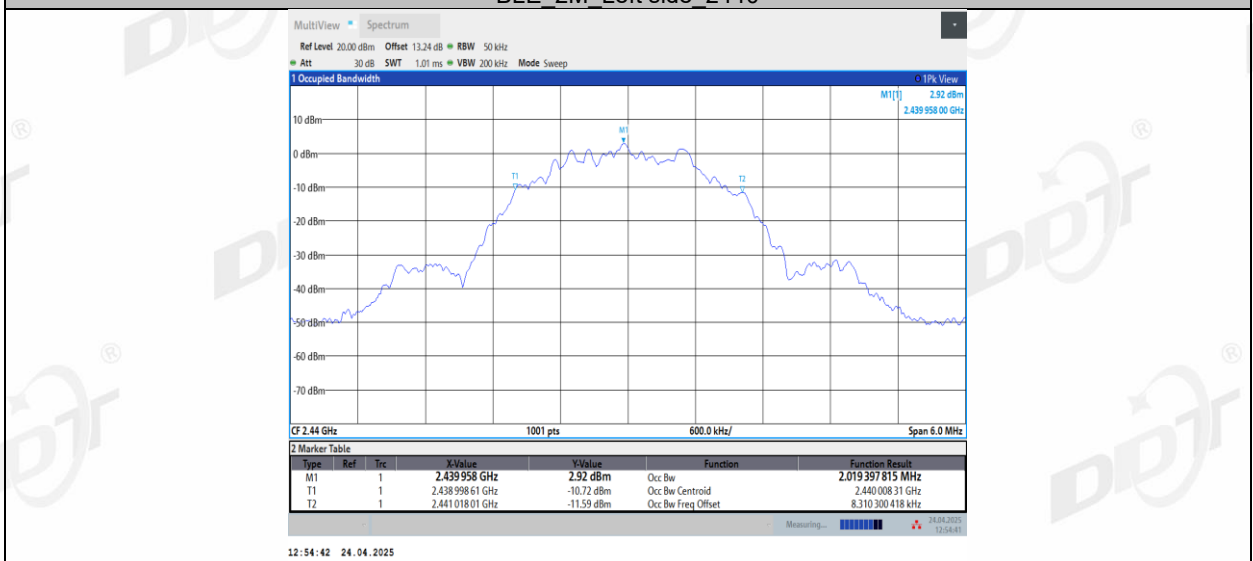


BLE 2M Right side 2440

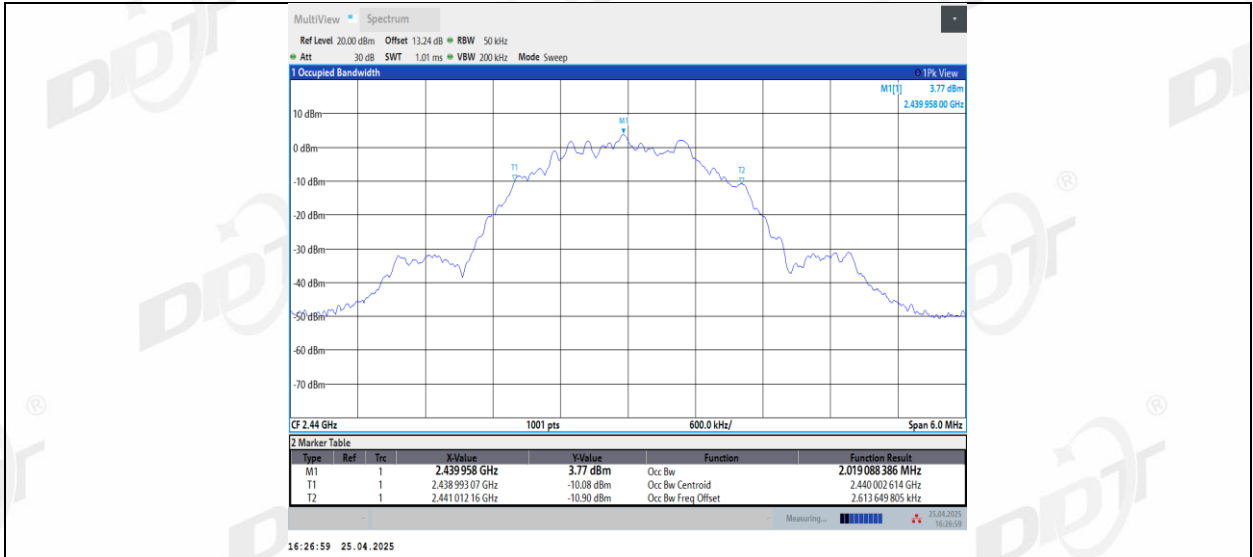

BLE\_2M\_Left side\_2478

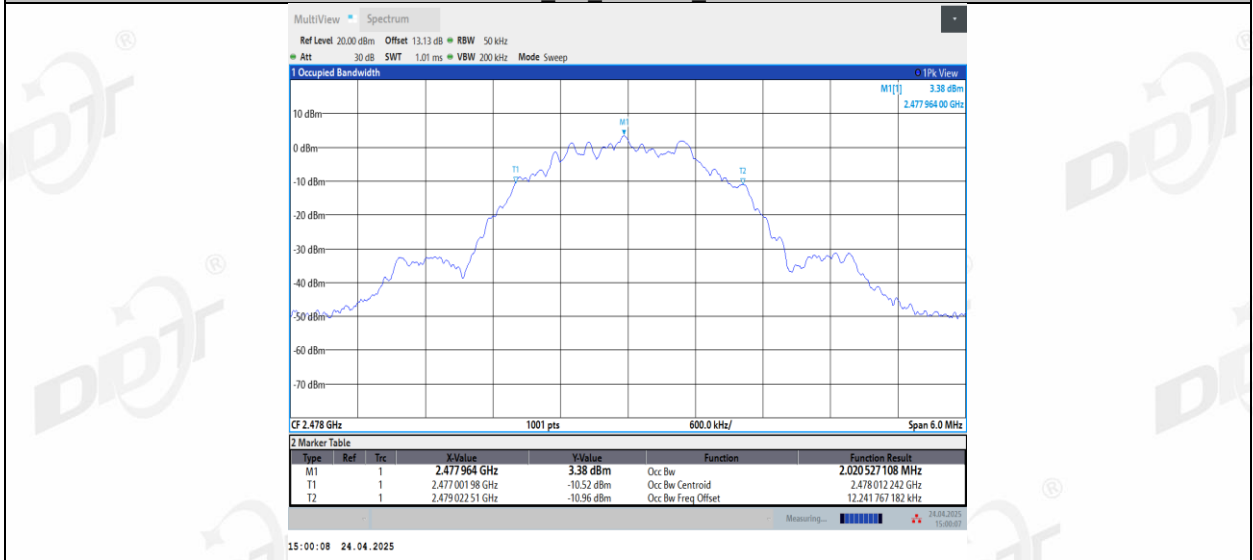


BLE\_2M\_Left side\_2478

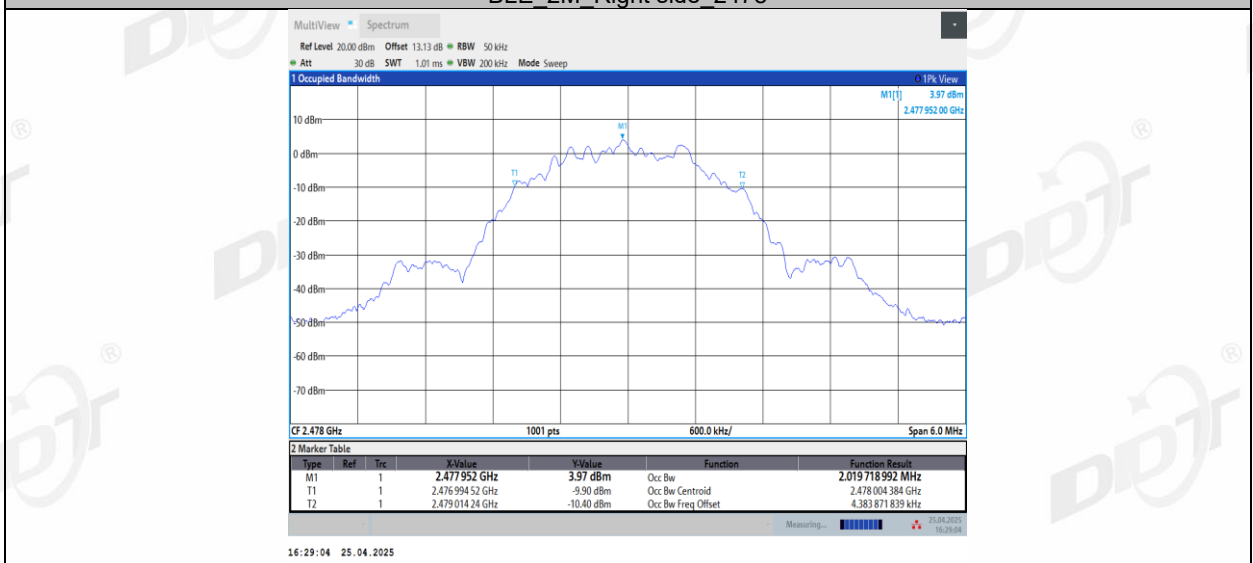

BLE\_2M\_Right side\_2478

## 6. Maximum Peak Output Power

### 6.1. Block diagram of test setup

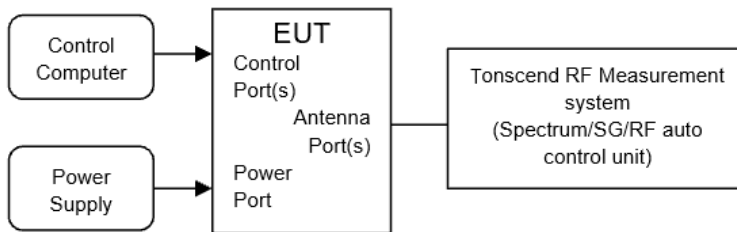

### 6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi, the e.i.r.p shall not exceed 4W.

### 6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.1.1.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 


RBW:	≥DTS bandwidth
VBW:	≥3 x RBW
Span	≥3 x RBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, use peak marker function to determine the peak amplitude level.


#### 6.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	23.2°C,46.5%RH	Test Date:	2025.05.26
Test Power Supply:	Battery	Sample Number:	S25030330-008


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Left side	2402	8.32	≤30	6.19	≤36	PASS
	Right side	2402	7.64	≤30	4.43	≤36	PASS
	Left side	2440	8.07	≤30	5.94	≤36	PASS
	Right side	2440	7.47	≤30	4.26	≤36	PASS
	Left side	2480	8.24	≤30	6.11	≤36	PASS
	Right side	2480	7.78	≤30	4.57	≤36	PASS
BLE_2M	Left side	2404	8.32	≤30	6.19	≤36	PASS
	Right side	2404	7.73	≤30	4.52	≤36	PASS
	Left side	2440	8.09	≤30	5.96	≤36	PASS
	Right side	2440	7.55	≤30	4.34	≤36	PASS
	Left side	2478	8.37	≤30	6.24	≤36	PASS
	Right side	2478	7.95	≤30	4.74	≤36	PASS

### 6.5. Test graphs

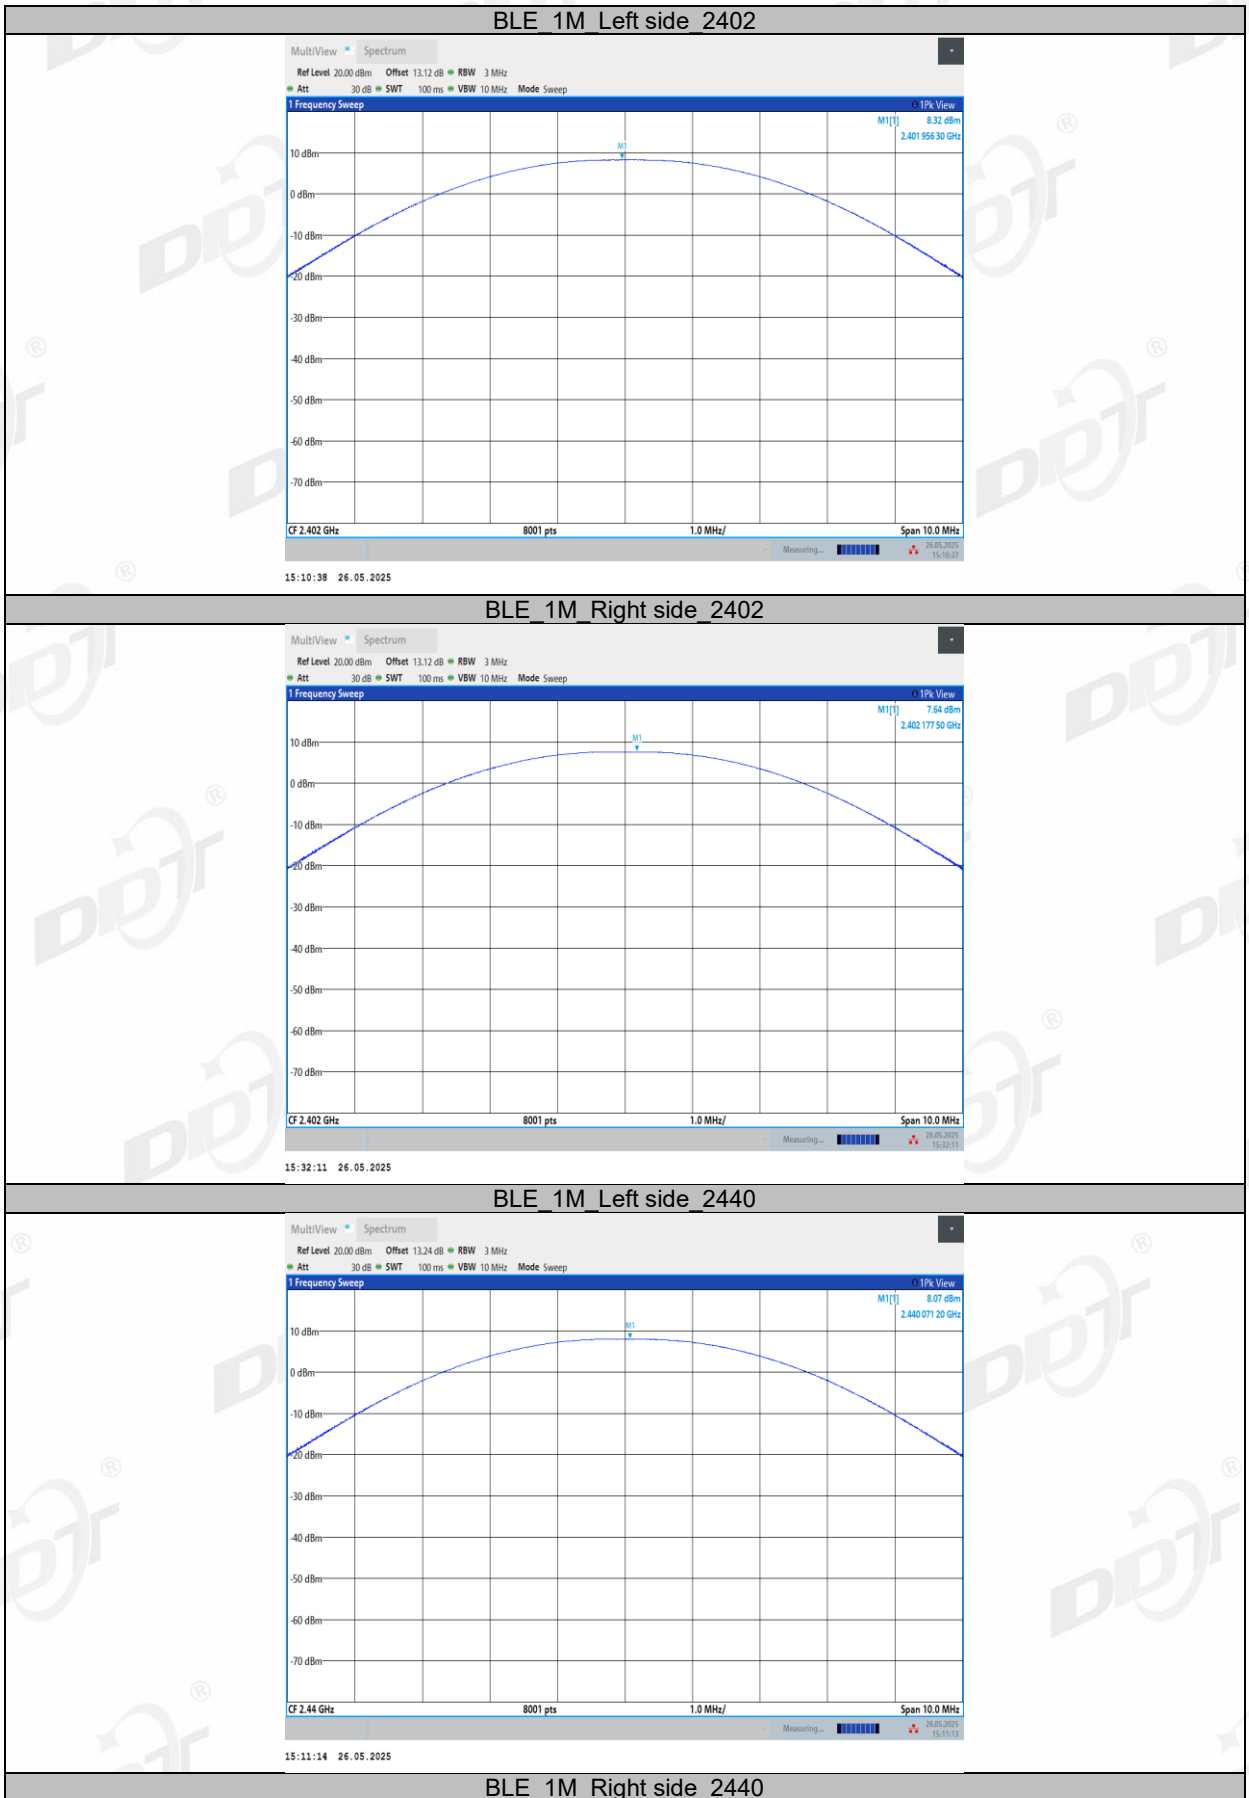


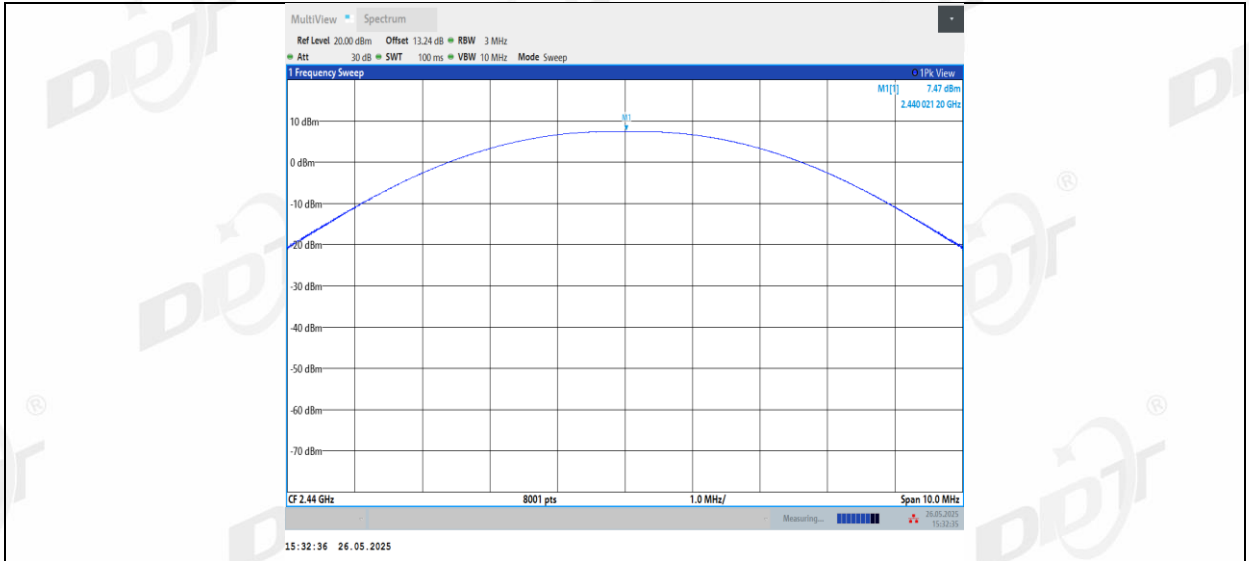


BLE\_1M Left side\_2480

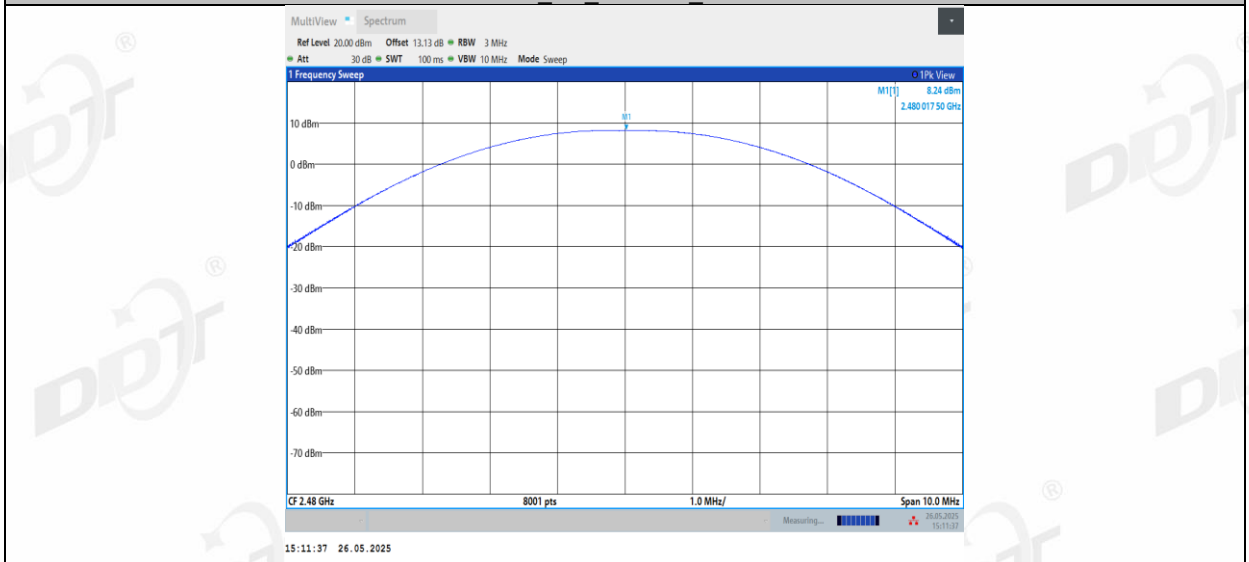


BLE\_1M Right side\_2480

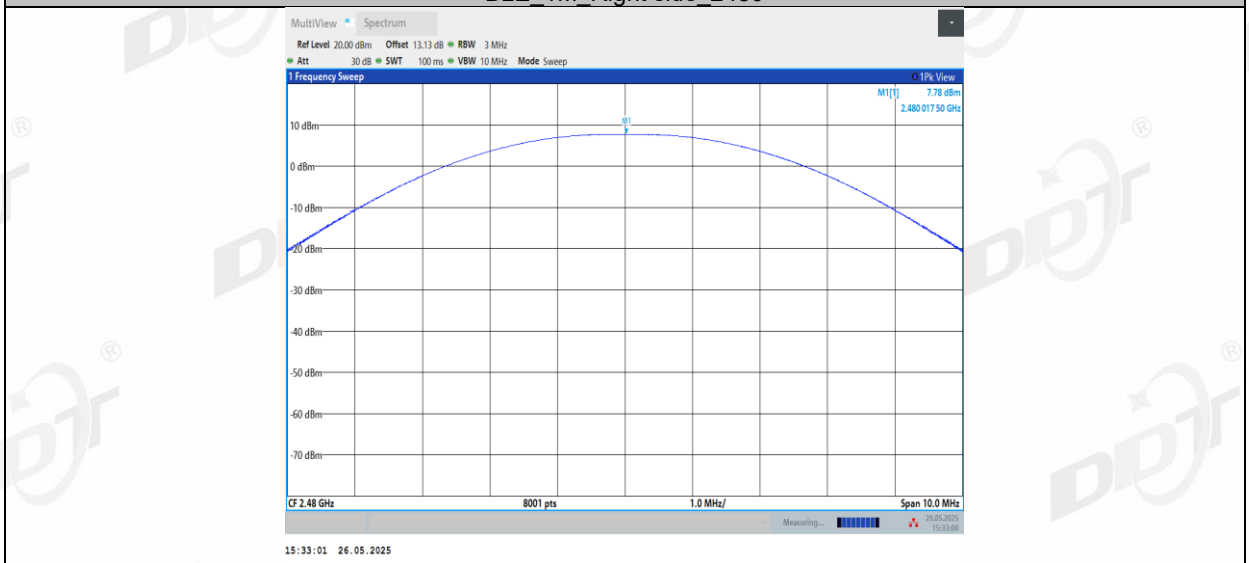


BLE\_2M Left side\_2404

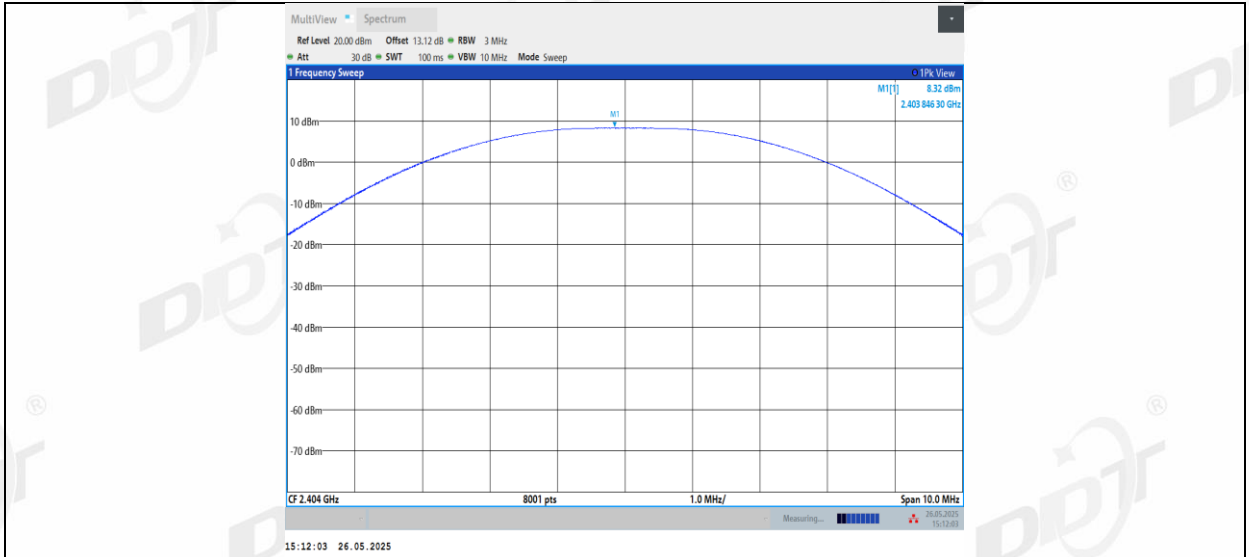


BLE\_2M\_Right side\_2404

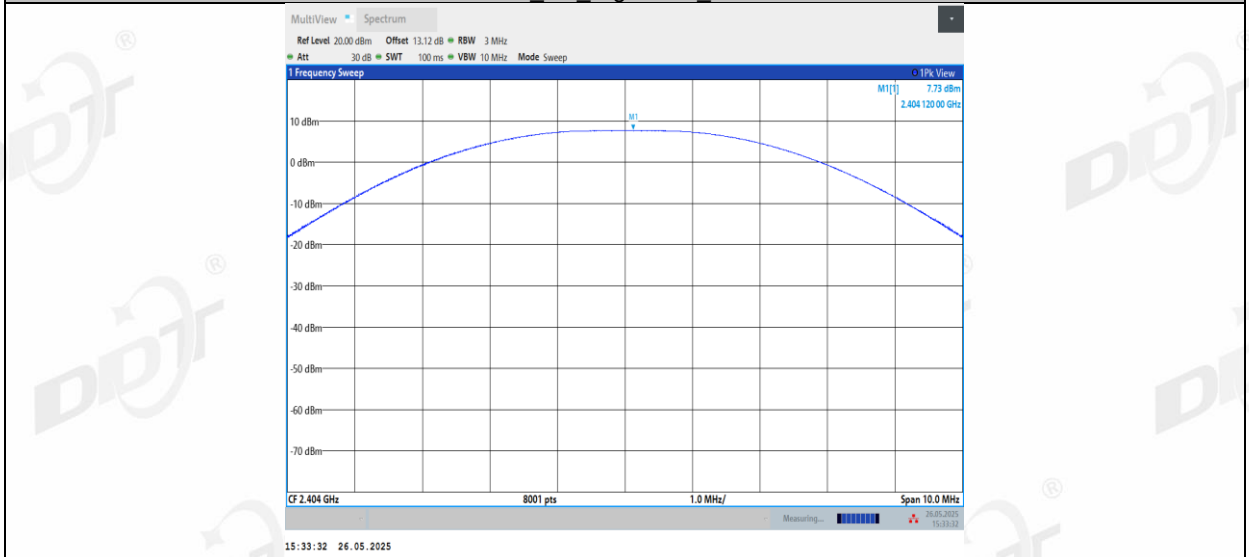


BLE\_2M\_Left side\_2440

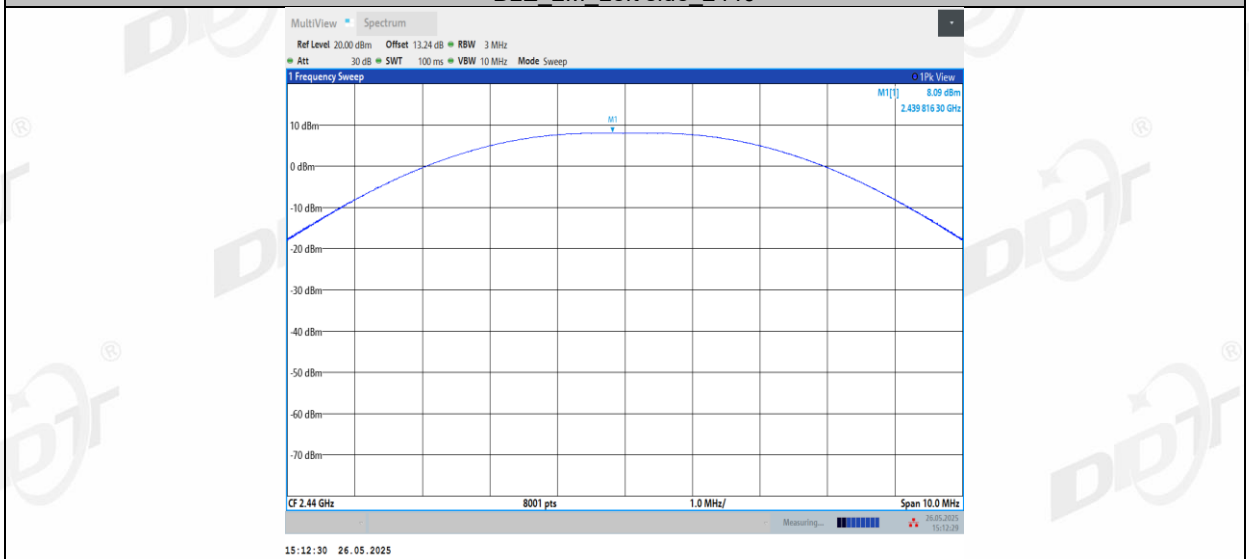


BLE\_2M\_Right side\_2440

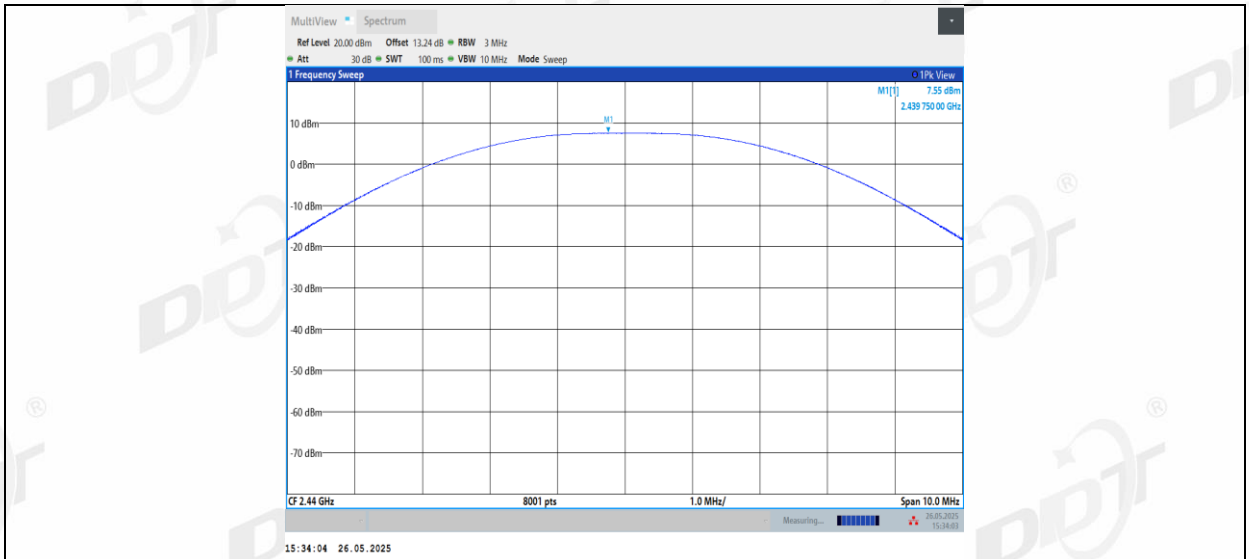

BLE\_2M\_Left side\_2478

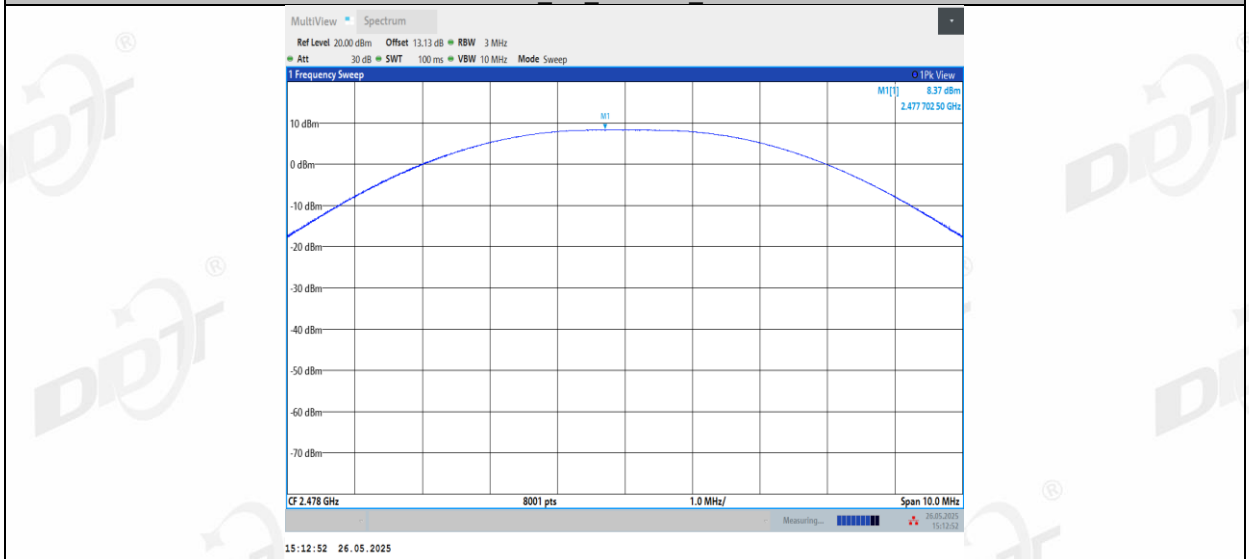


BLE\_2M\_Right side\_2478

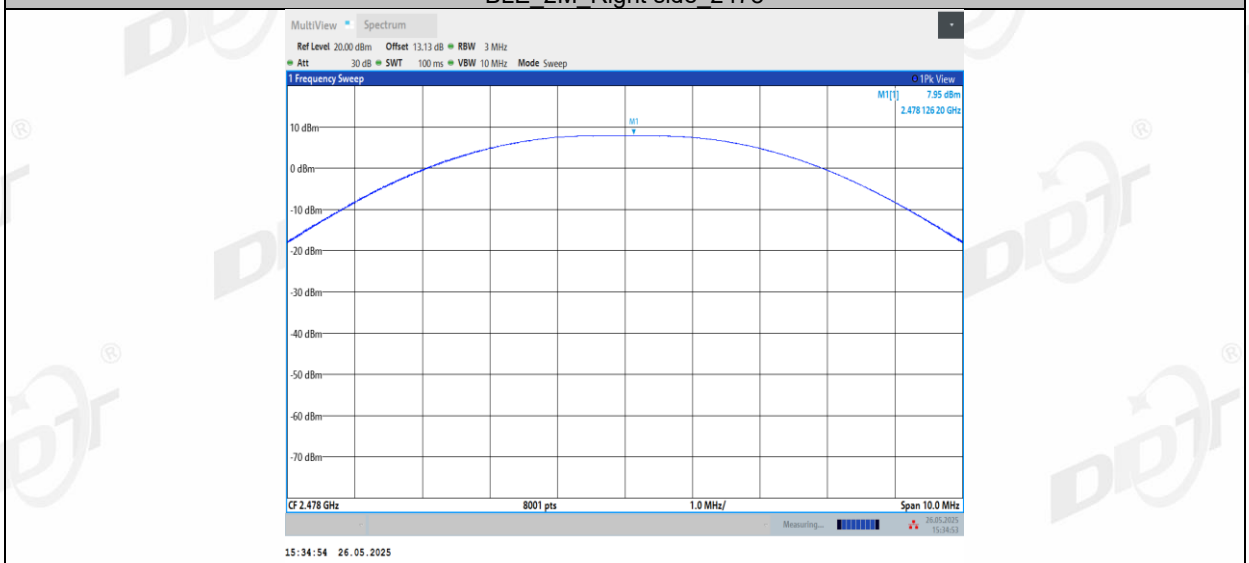

## 7. Power Spectral Density

### 7.1. Block diagram of test setup

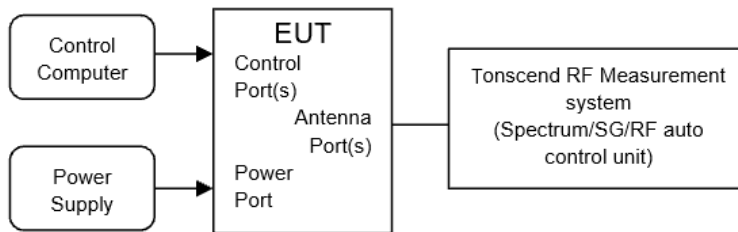

### 7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:
 

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


#### 7.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.3-27°C,47.3-49.5%RH	Test Date:	2025.05.27-2025.05.28
Test Power Supply:	Battery	Sample Number:	S25030330-008


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Left side	2402	-8.40	≤8.00	PASS
	Right side	2402	-8.86	≤8.00	PASS
	Left side	2440	-8.69	≤8.00	PASS
	Right side	2440	-9.03	≤8.00	PASS
	Left side	2480	-8.53	≤8.00	PASS
	Right side	2480	-8.91	≤8.00	PASS
BLE_2M	Left side	2404	-11.55	≤8.00	PASS
	Right side	2404	-11.99	≤8.00	PASS
	Left side	2440	-11.77	≤8.00	PASS
	Right side	2440	-12.08	≤8.00	PASS
	Left side	2478	-11.74	≤8.00	PASS
	Right side	2478	-11.84	≤8.00	PASS

### 7.5. Test graphs

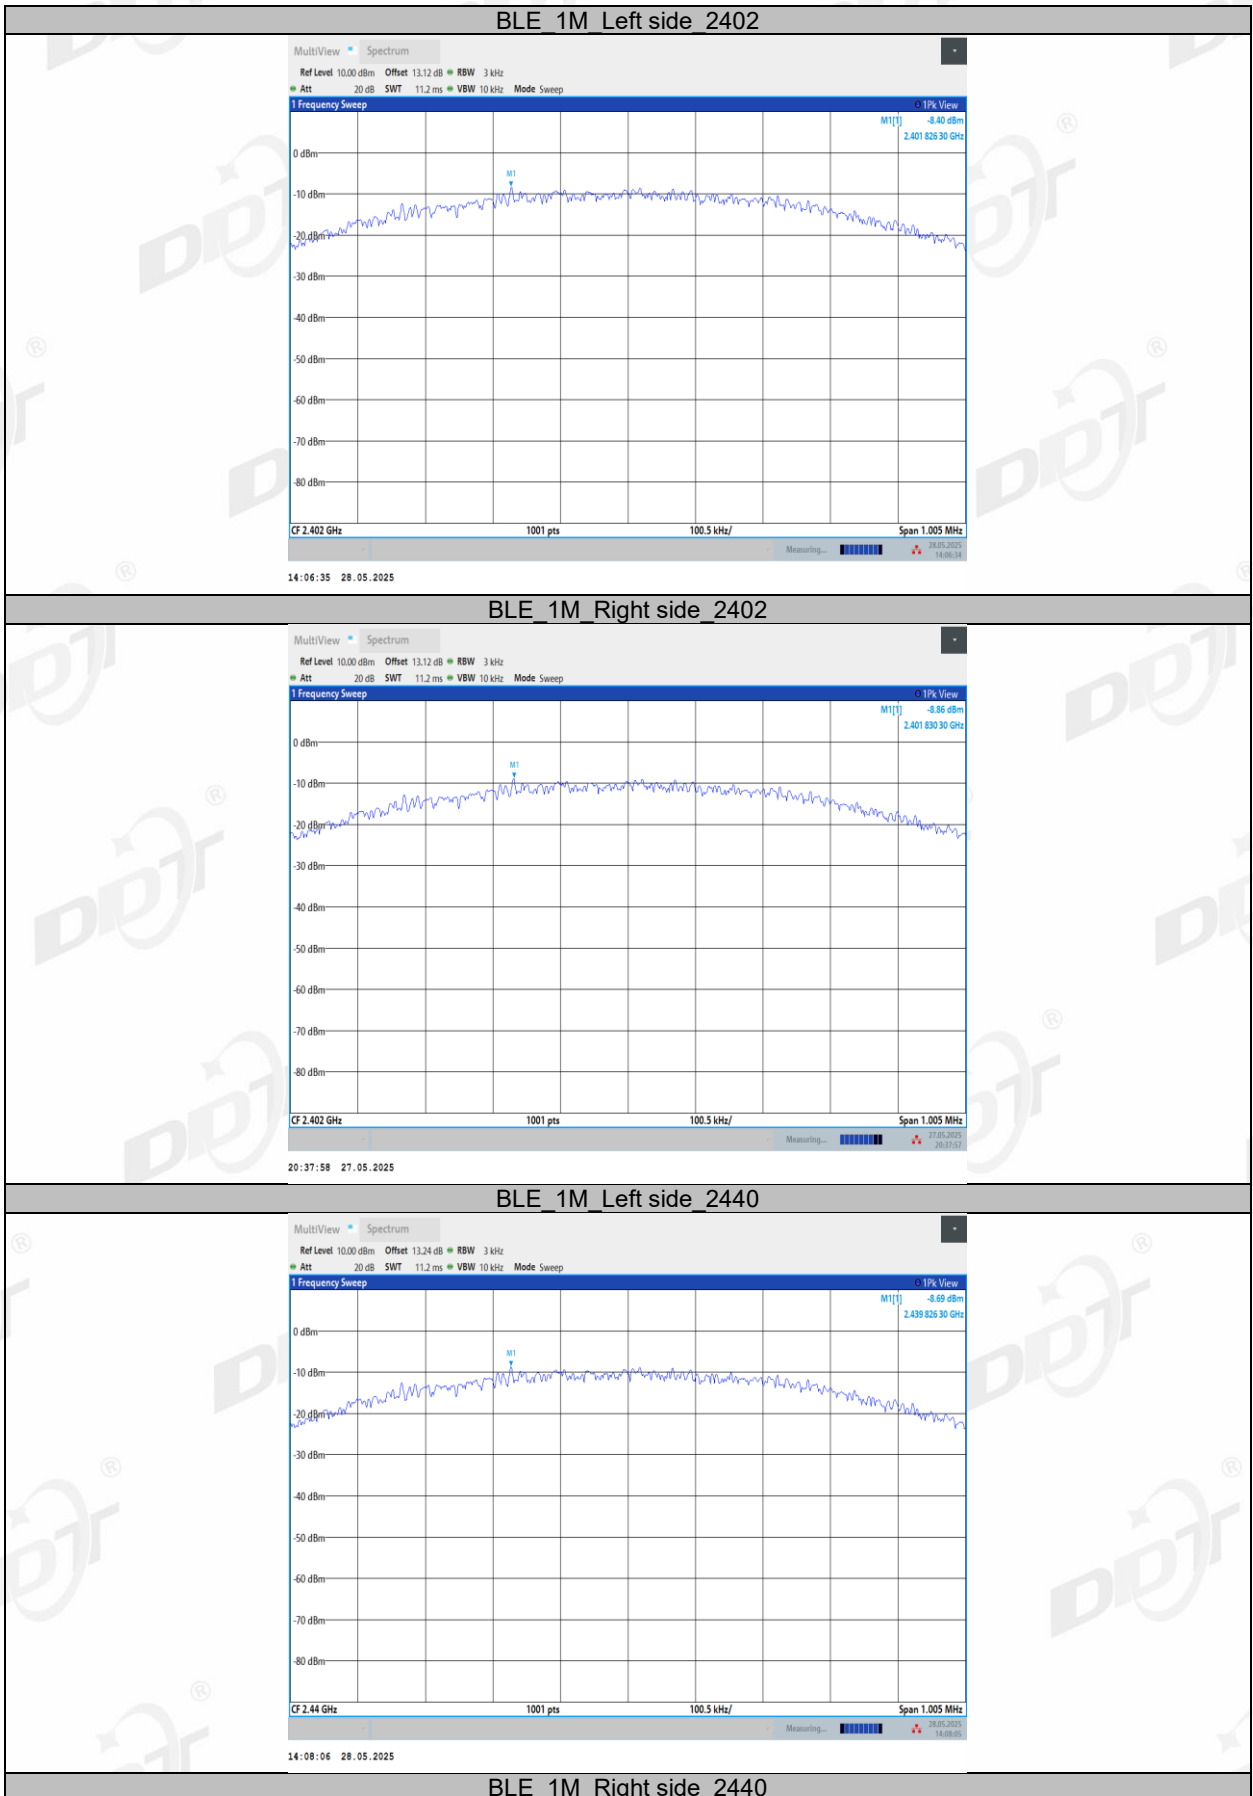


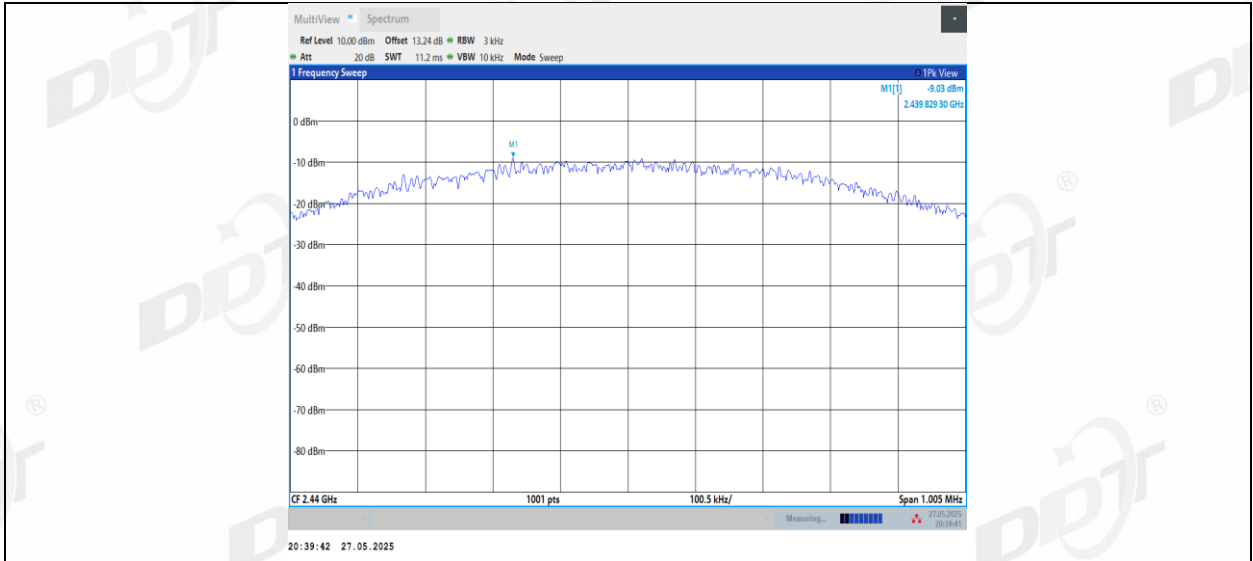


BLE\_1M\_Left side\_2480

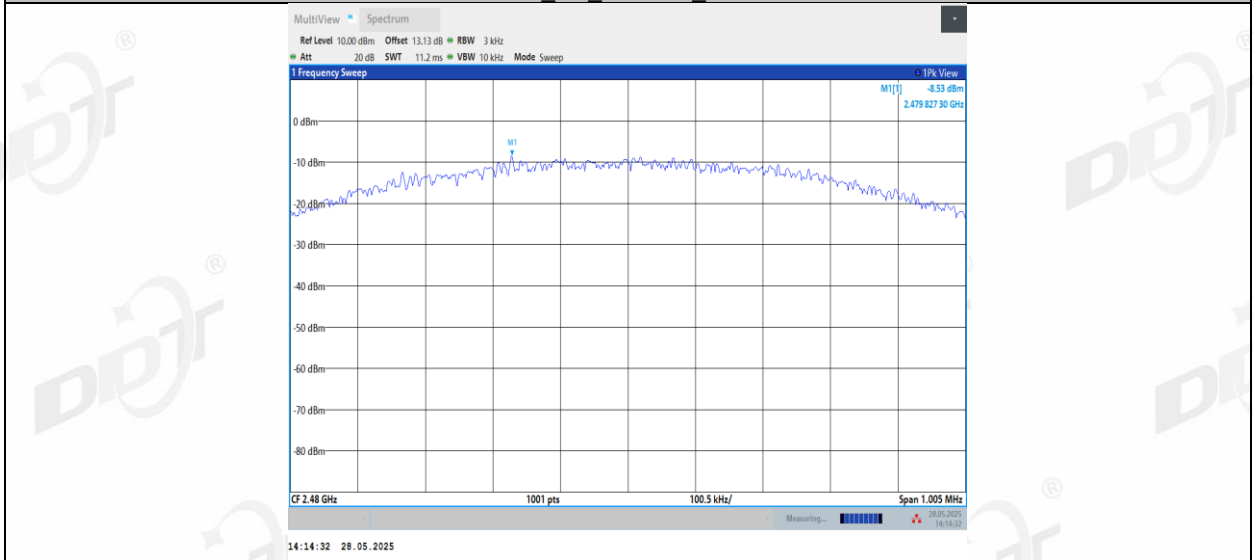


BLE\_1M\_Right side\_2480

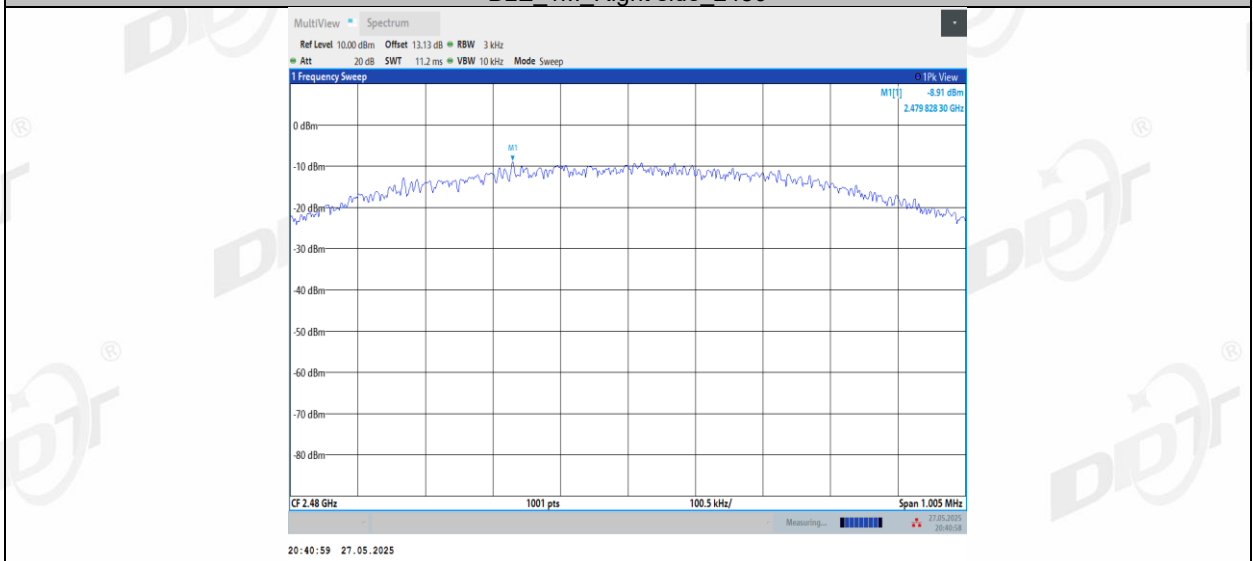


BLE\_2M\_Left side\_2404

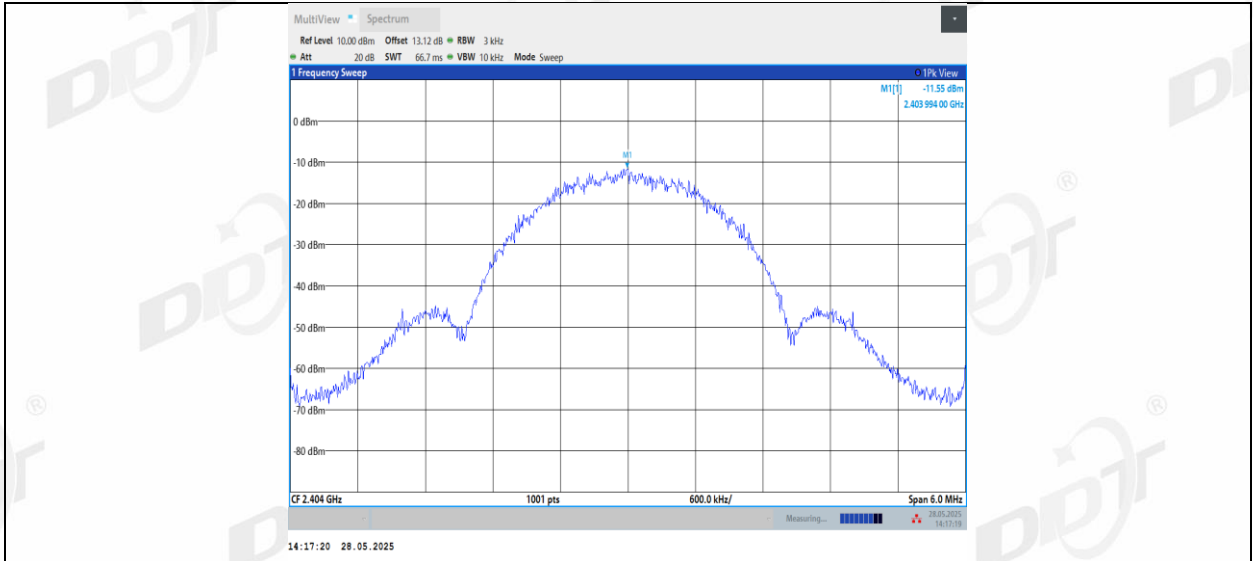


BLE 2M Right side 2404

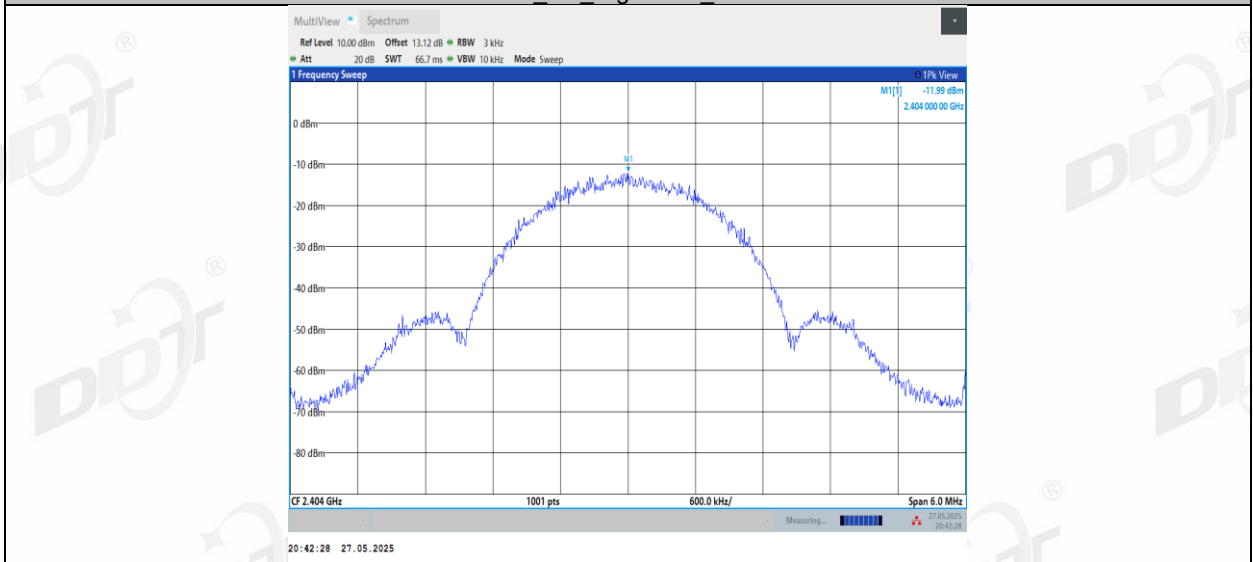


BLE 2M Left side 2440

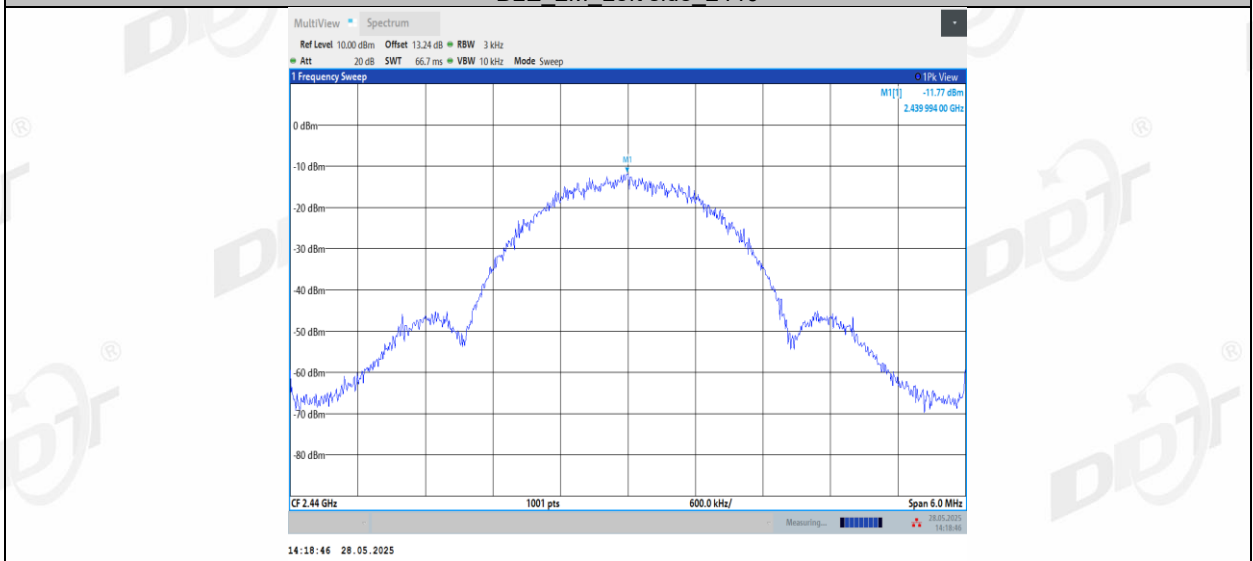


BLE 2M Right side 2440

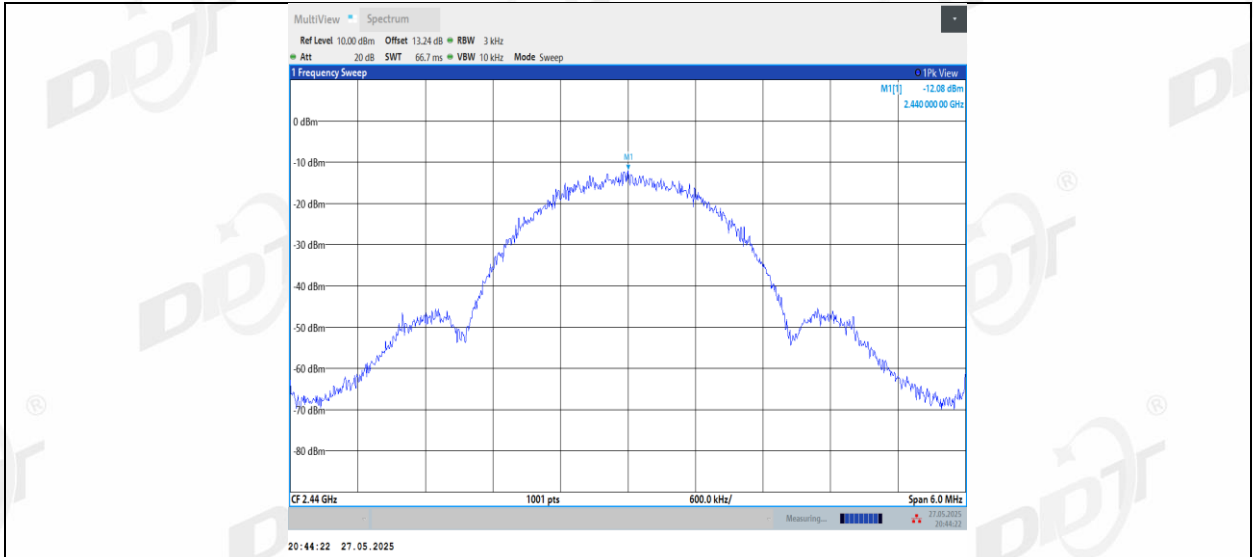

BLE\_2M\_Left side\_2478

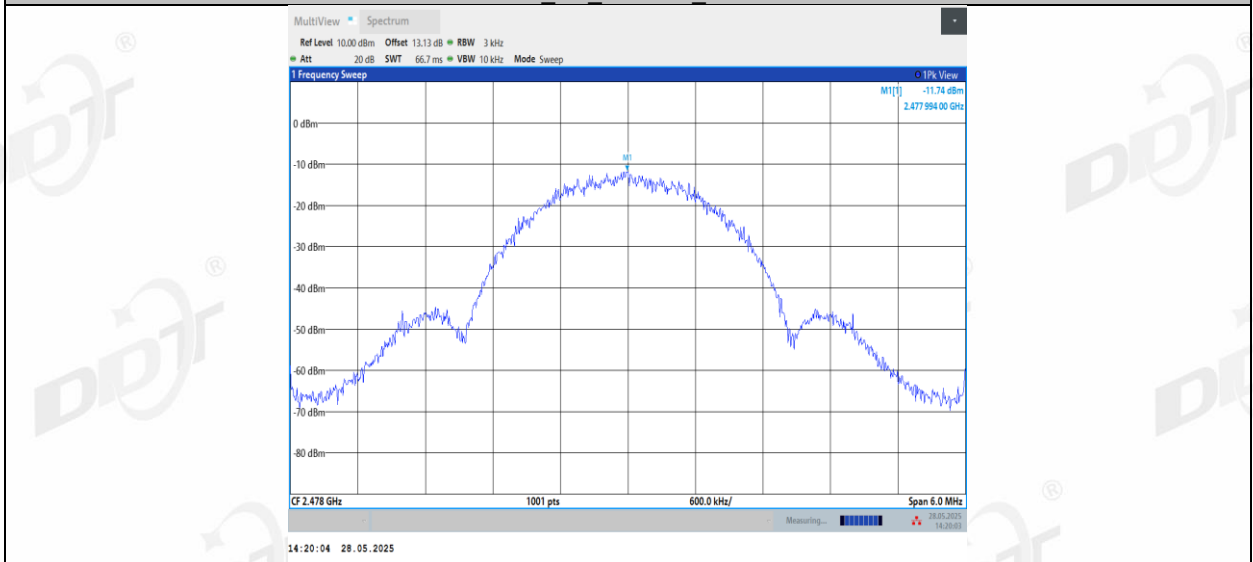


BLE\_2M\_Right side\_2478

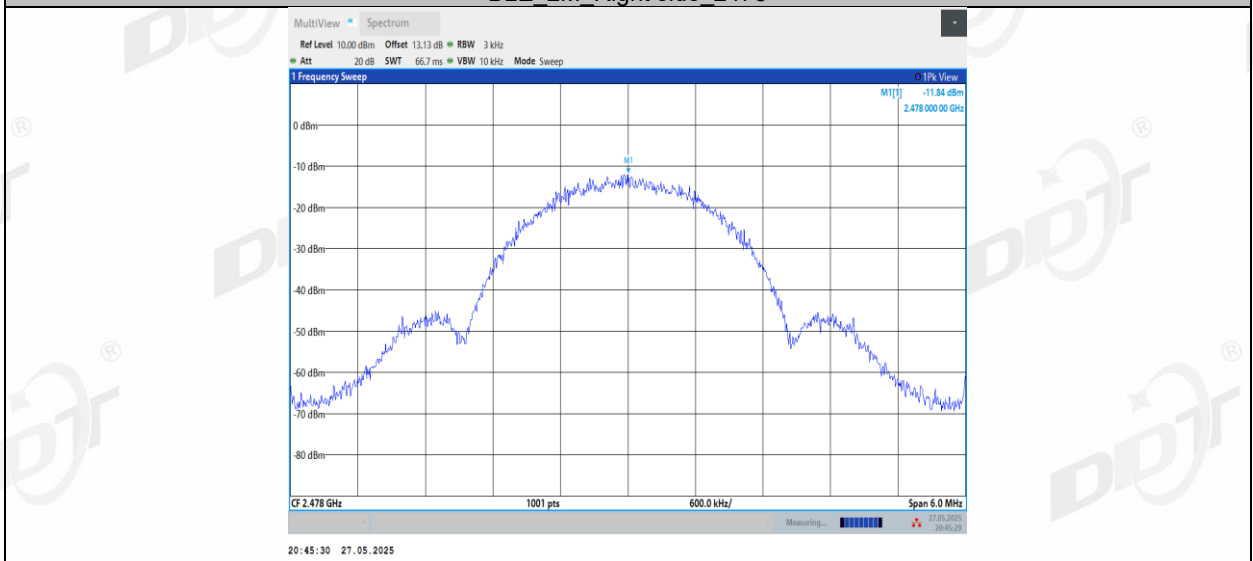

## 8. Band Edge Compliance (Conducted Method)

### 8.1. Block diagram of test setup

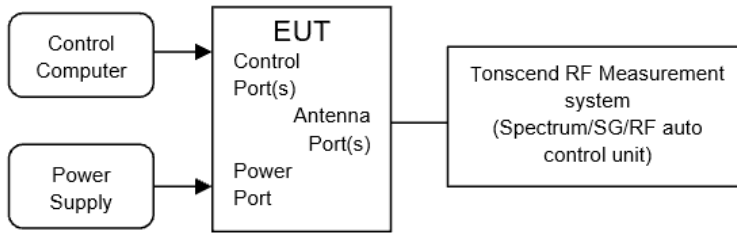

### 8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


#### 8.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.3-27°C,47.3-49.5%RH	Test Date:	2025.05.27-2025.05.28
Test Power Supply:	Battery	Sample Number:	S25030330-008


Mode	Frequency [MHz]	Measured Range	Verdict
GFSK 1M	2402	2.310 GHz - 2.410 GHz	Pass
	2480	2.470 GHz - 2.500 GHz	Pass
GFSK 2M	2404	2.310 GHz - 2.410 GHz	Pass
	2478	2.470 GHz - 2.500 GHz	Pass

8.5. Test graphs




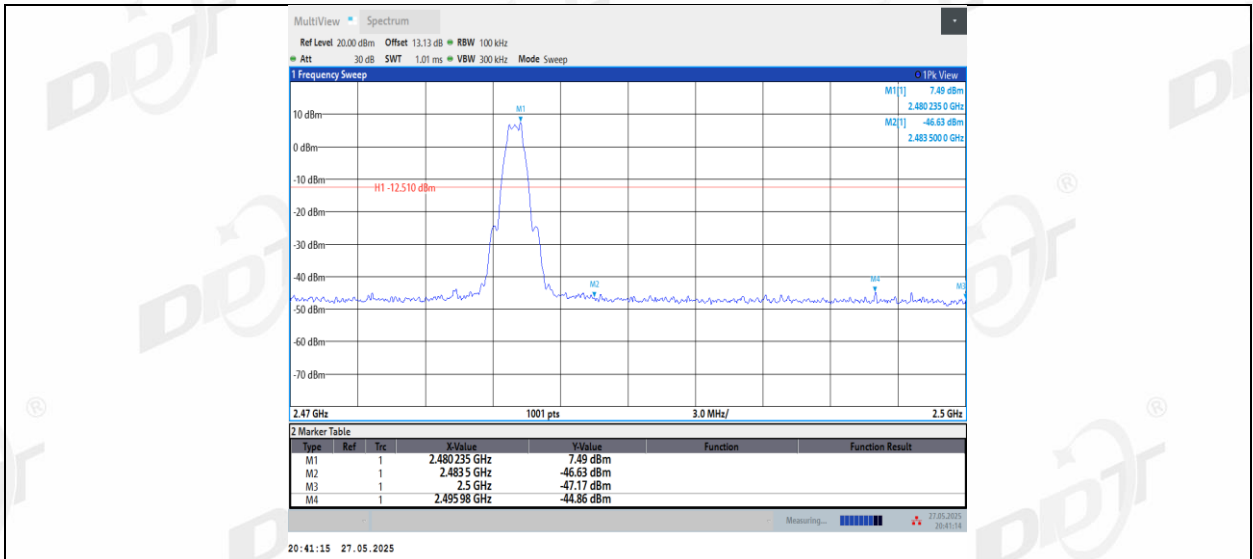


BLE\_2M Left side Low 2404

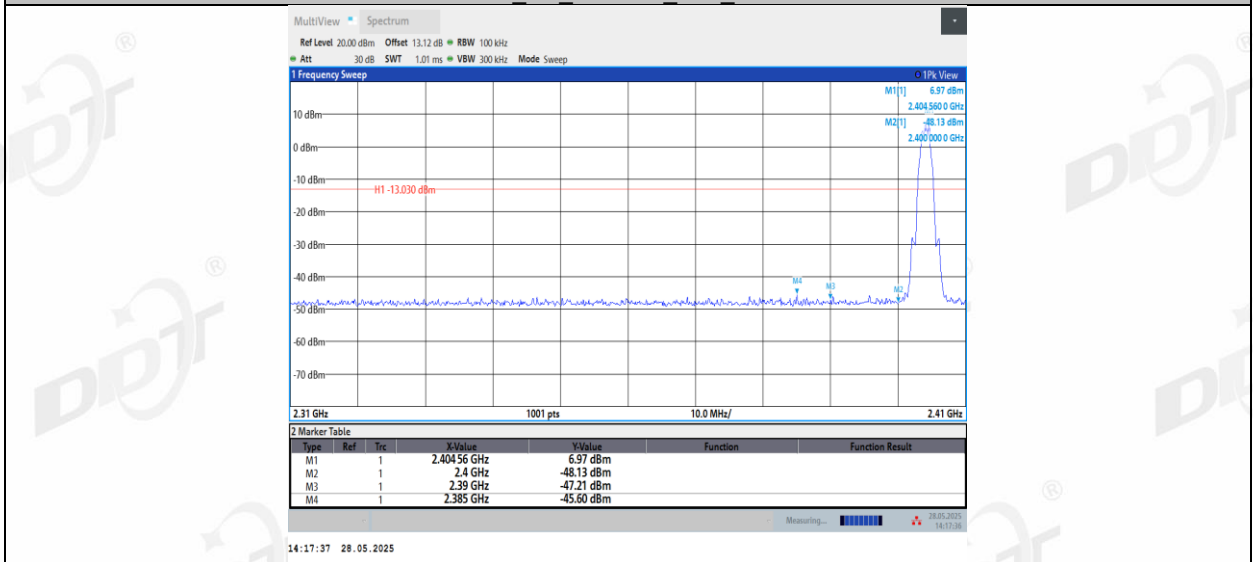


BLE\_2M Right side Low 2404

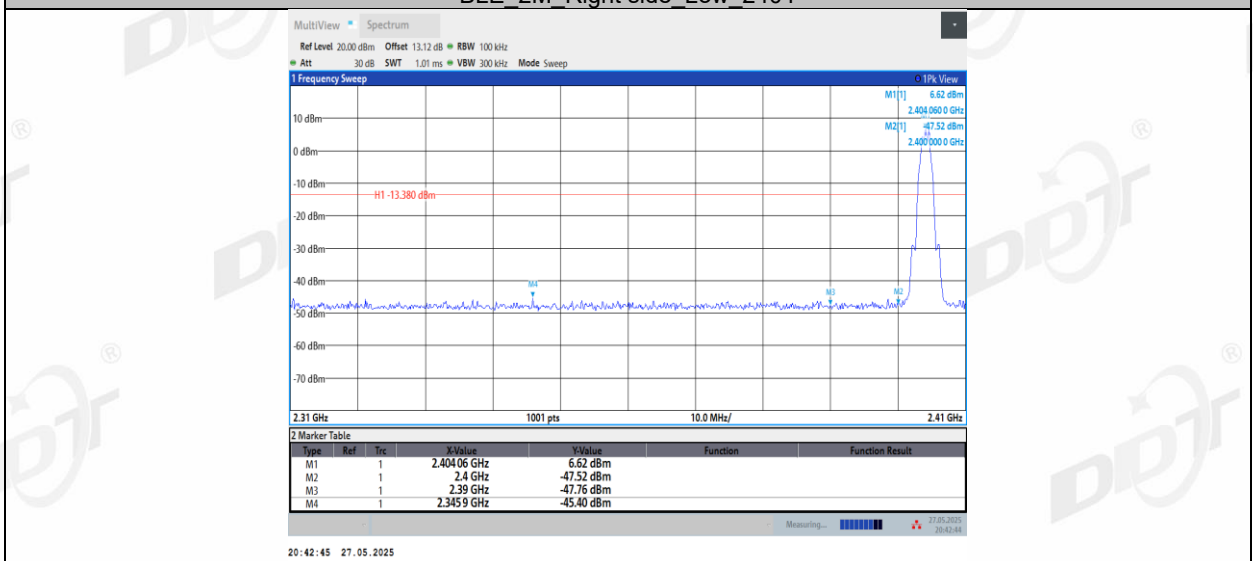

BLE\_2M Left side High 2478

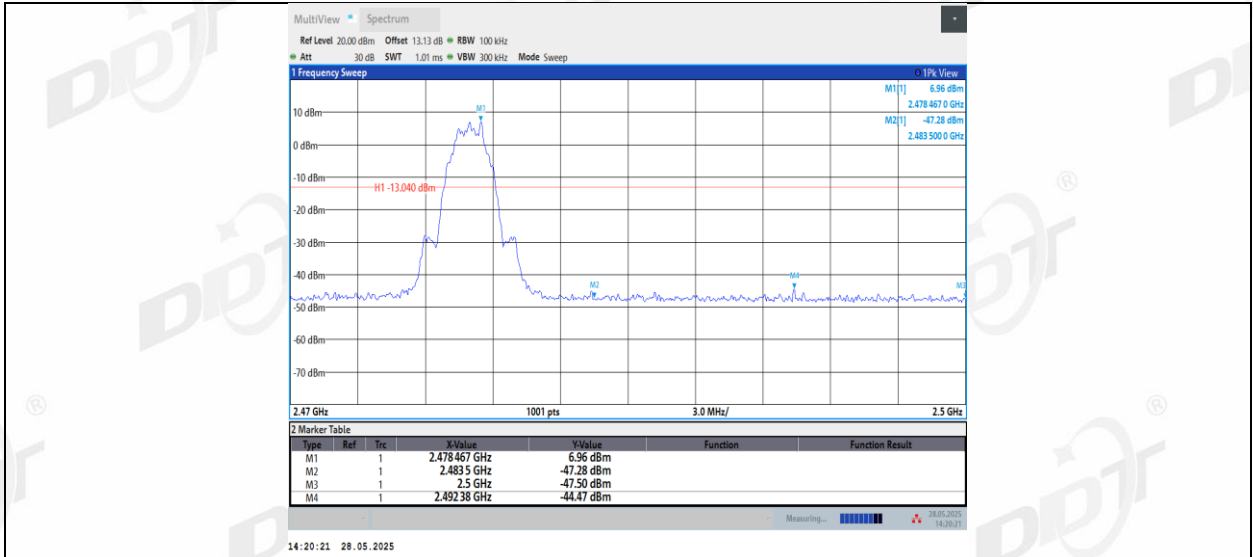


BLE\_2M\_Right side\_High\_2478

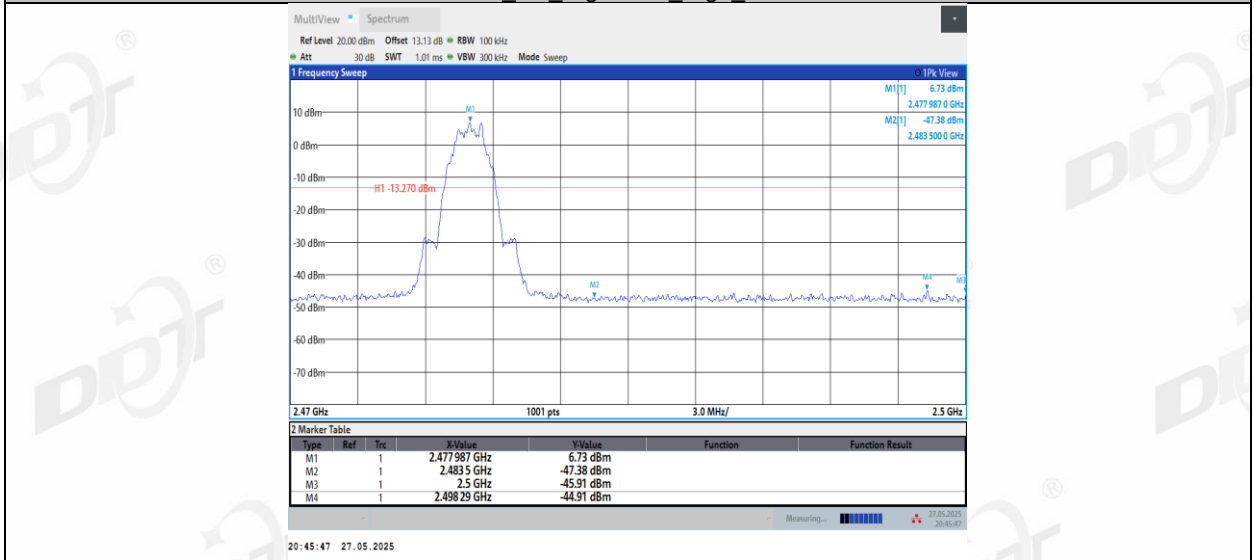

## 9. RF Conducted Spurious Emissions

### 9.1. Block diagram of test setup

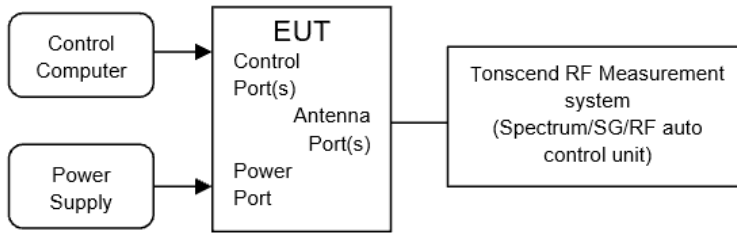

### 9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


#### 9.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.3-27°C,47.3-49.5%RH	Test Date:	2025.05.27-2025.05.28
Test Power Supply:	Battery	Sample Number:	S25030330-008


Mode	Frequency [MHz]	Verdict
GFSK 1M	2402	Pass
	2440	Pass
	2480	Pass
GFSK 2M	2404	Pass
	2440	Pass
	2478	Pass

### 9.5. Test graphs

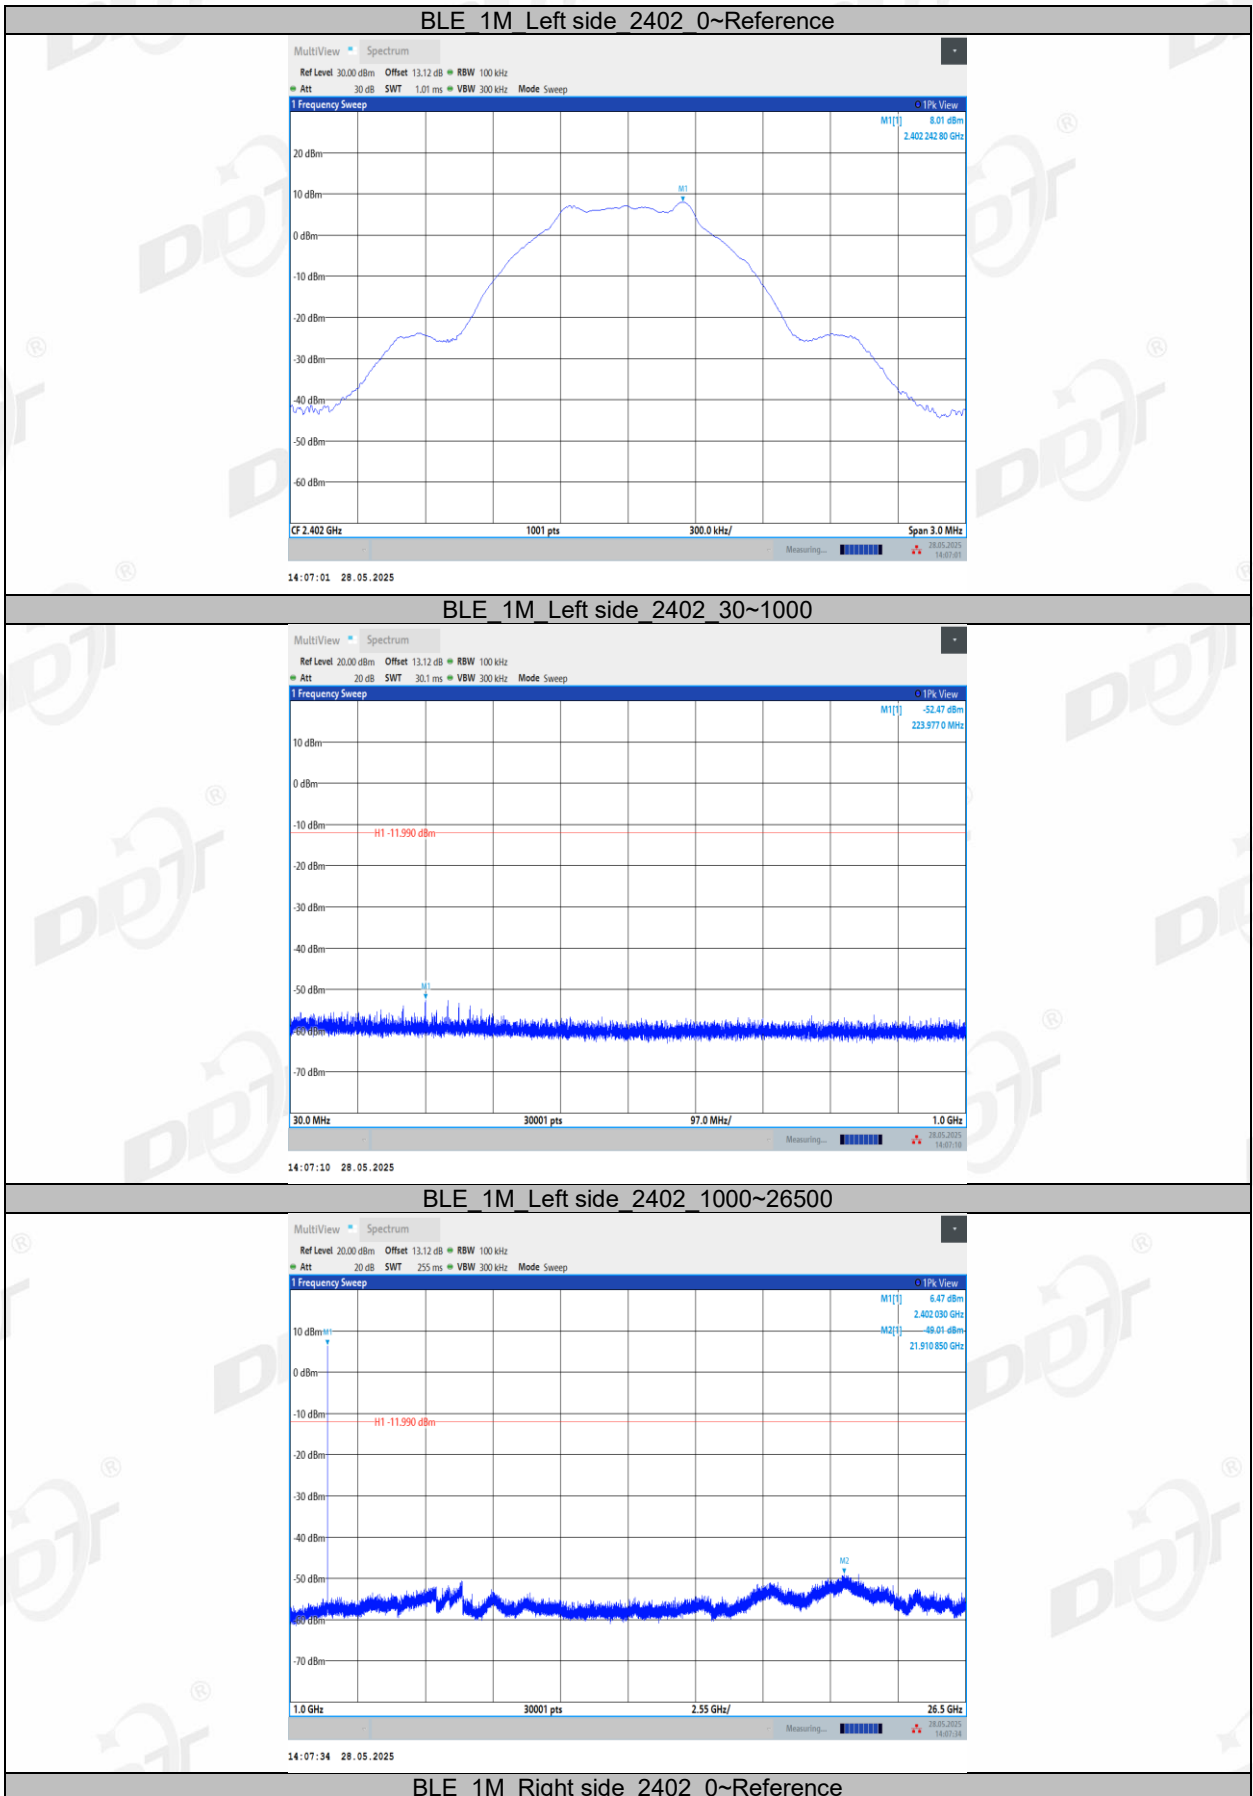


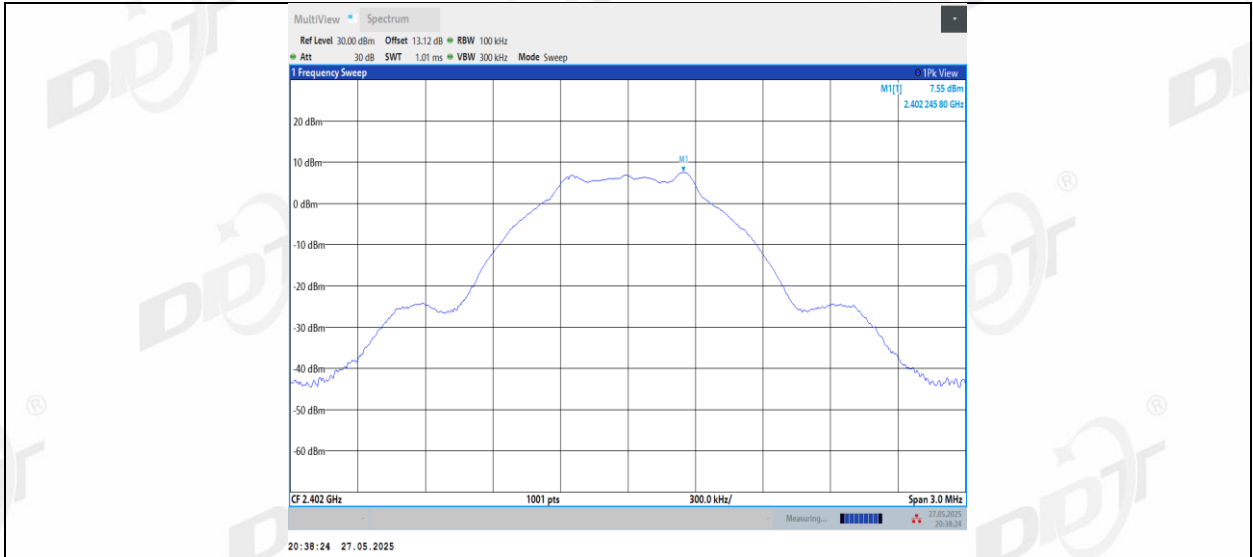


BLE\_1M\_Right side\_2402\_30~1000

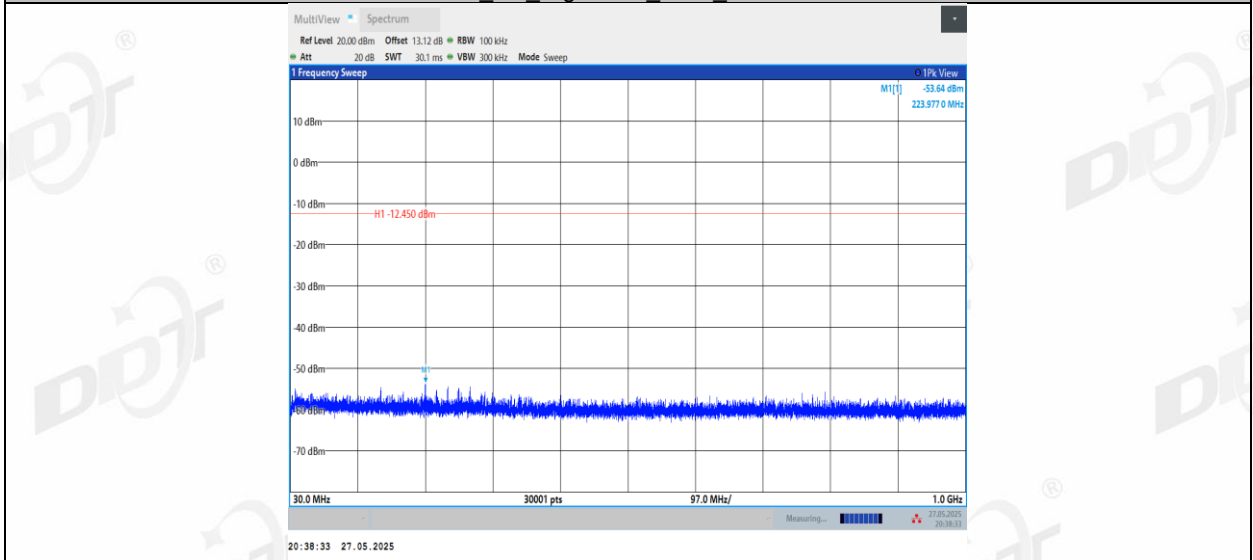


BLE\_1M\_Right side\_2402\_1000~26500

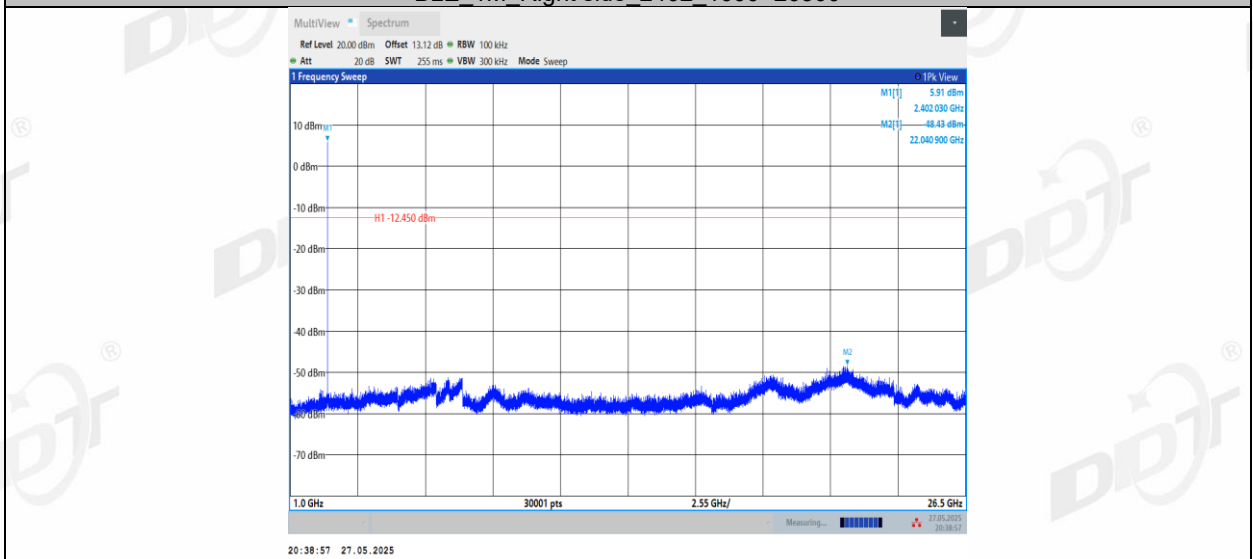


BLE\_1M\_Left side\_2440\_0~Reference

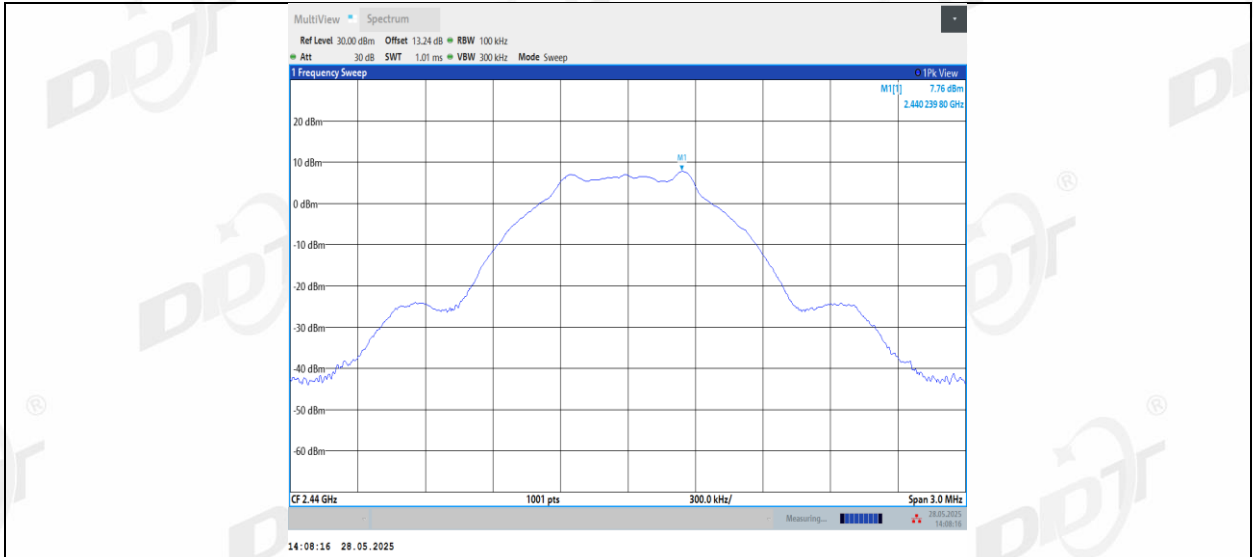


BLE\_1M\_Left side\_2440\_30~1000

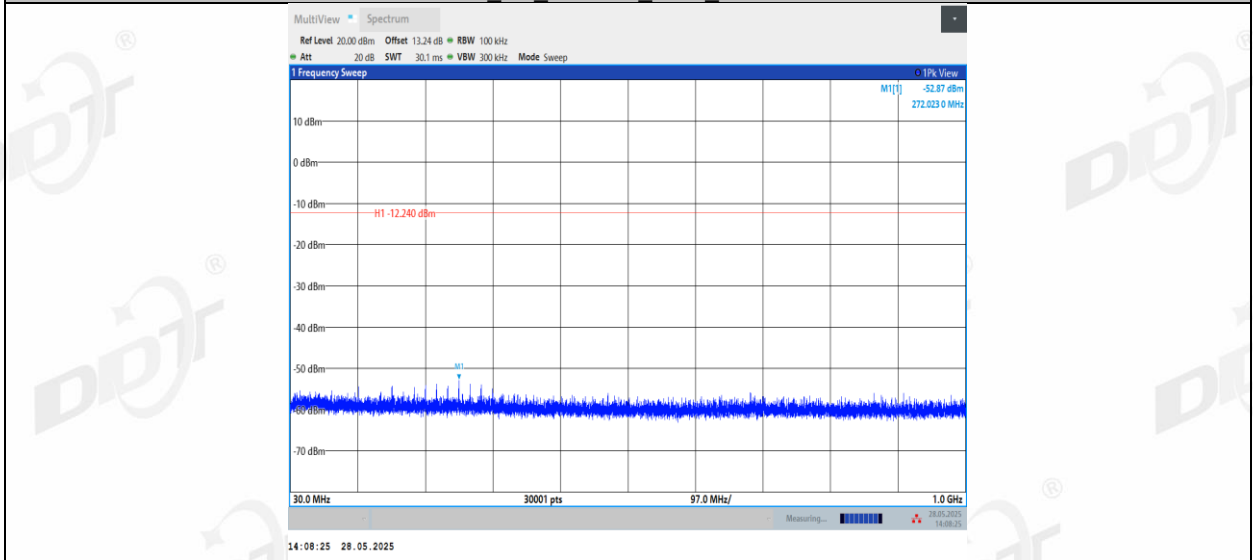


BLE\_1M\_Left side\_2440\_1000~26500

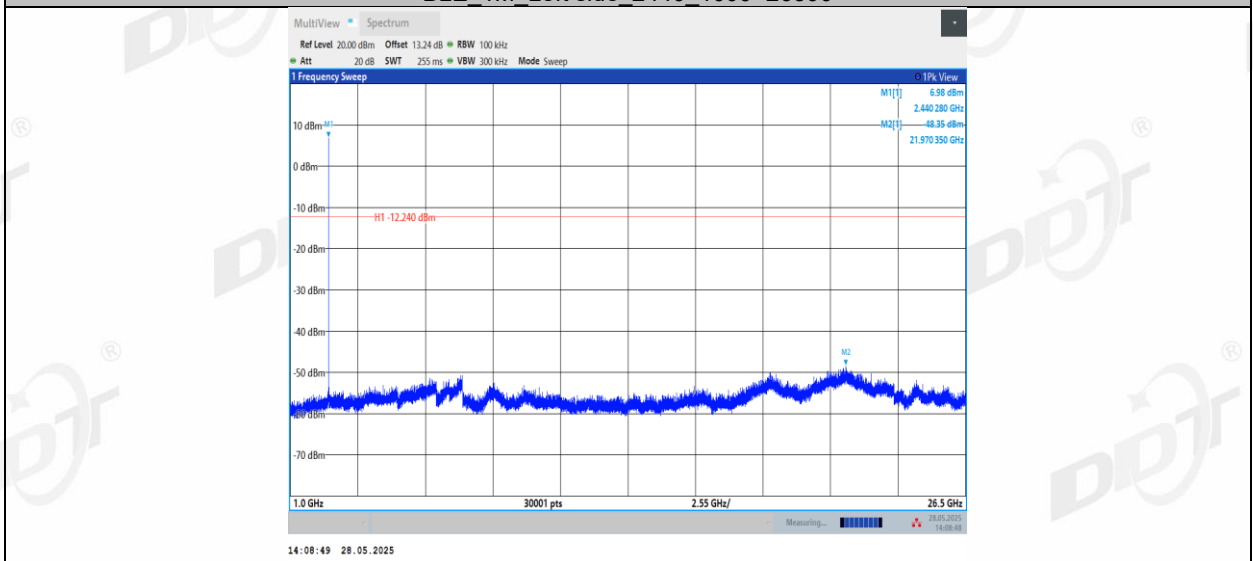


BLE\_1M\_Right side\_2440\_0~Reference

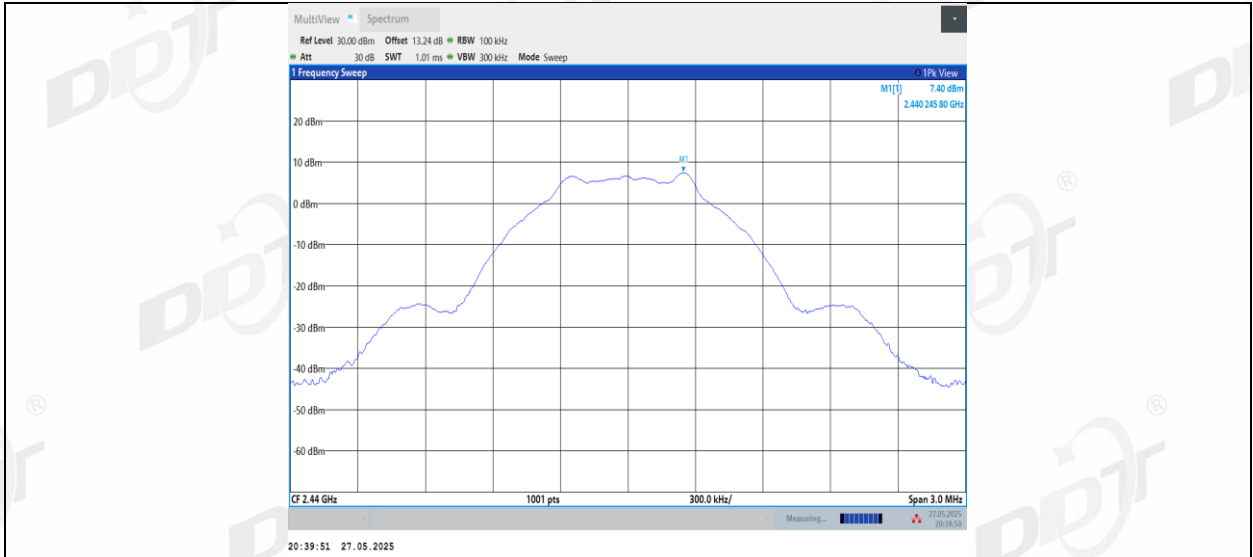


BLE\_1M\_Right side\_2440\_30~1000

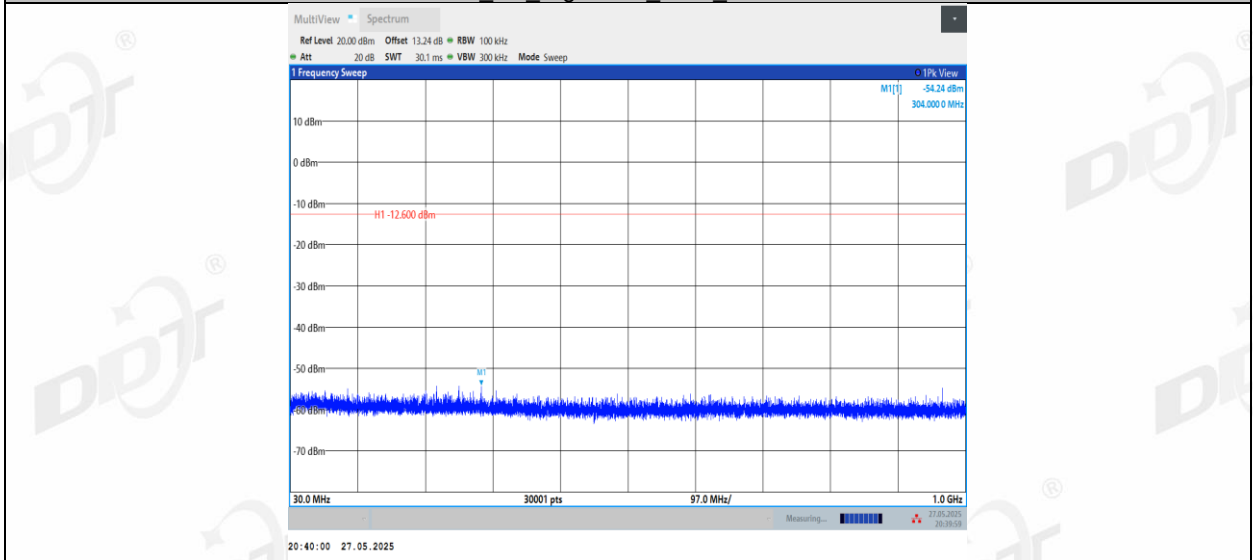


BLE\_1M\_Right side\_2440\_1000~26500

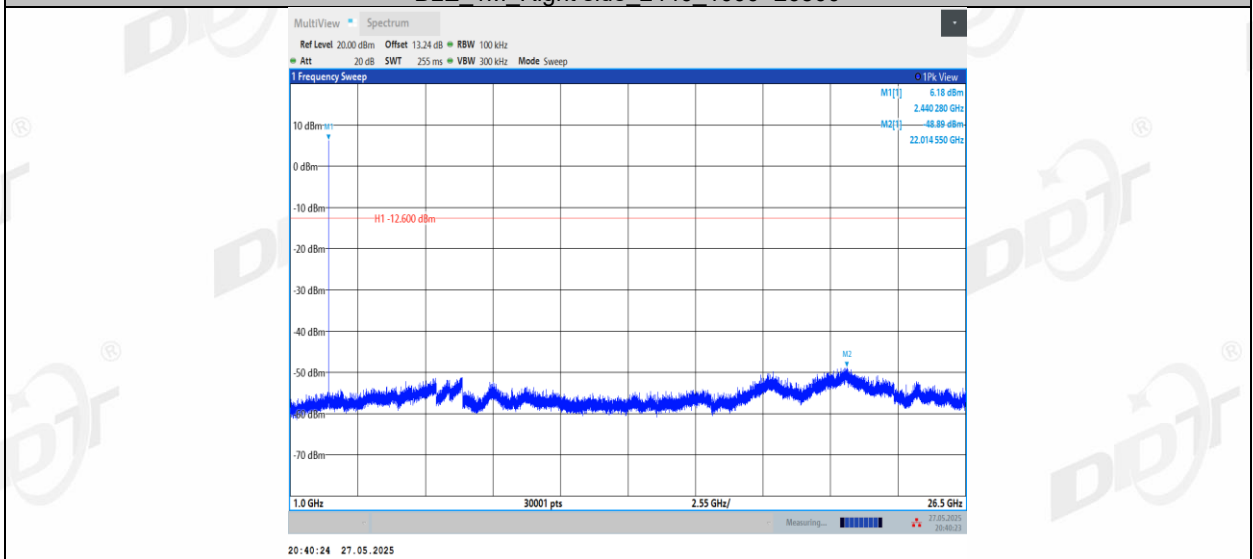


BLE\_1M\_Left side\_2480\_0~Reference

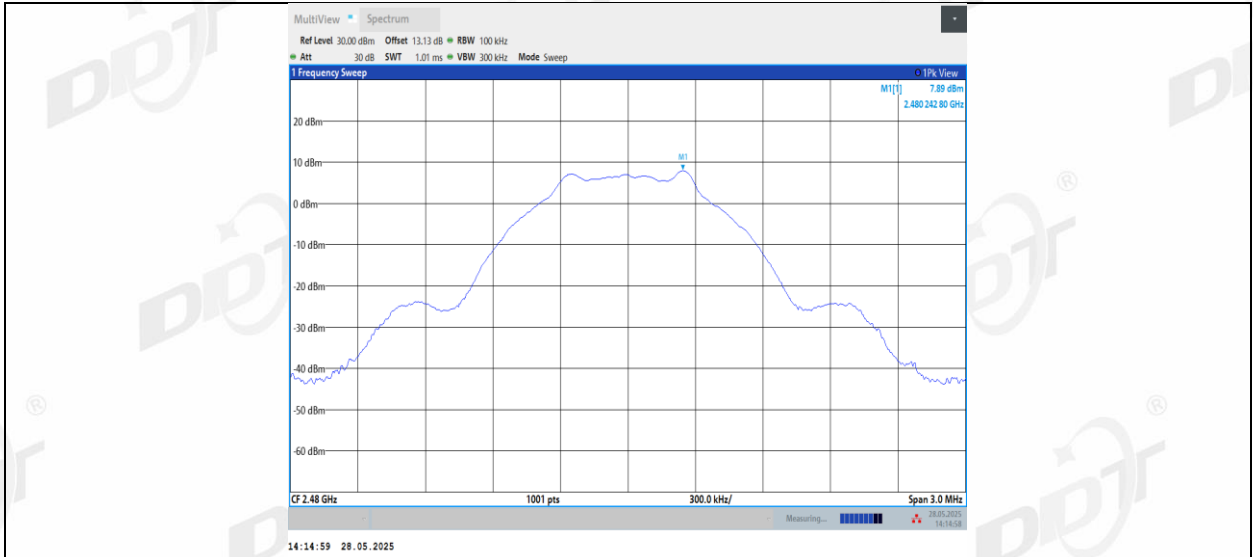


BLE\_1M\_Left side\_2480\_30~1000

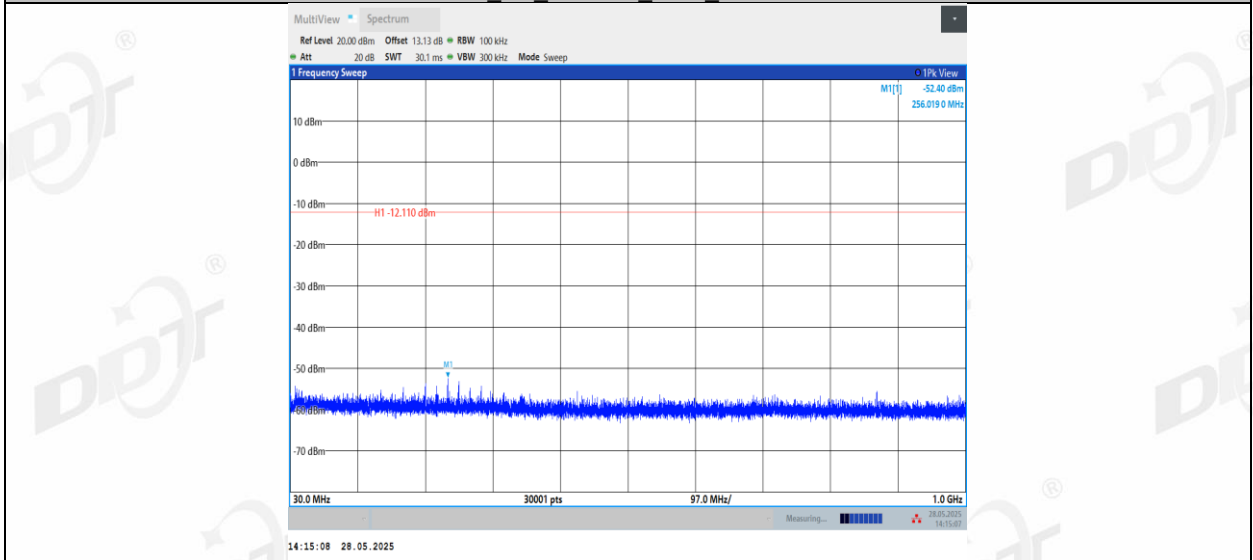


BLE\_1M\_Left side\_2480\_1000~26500

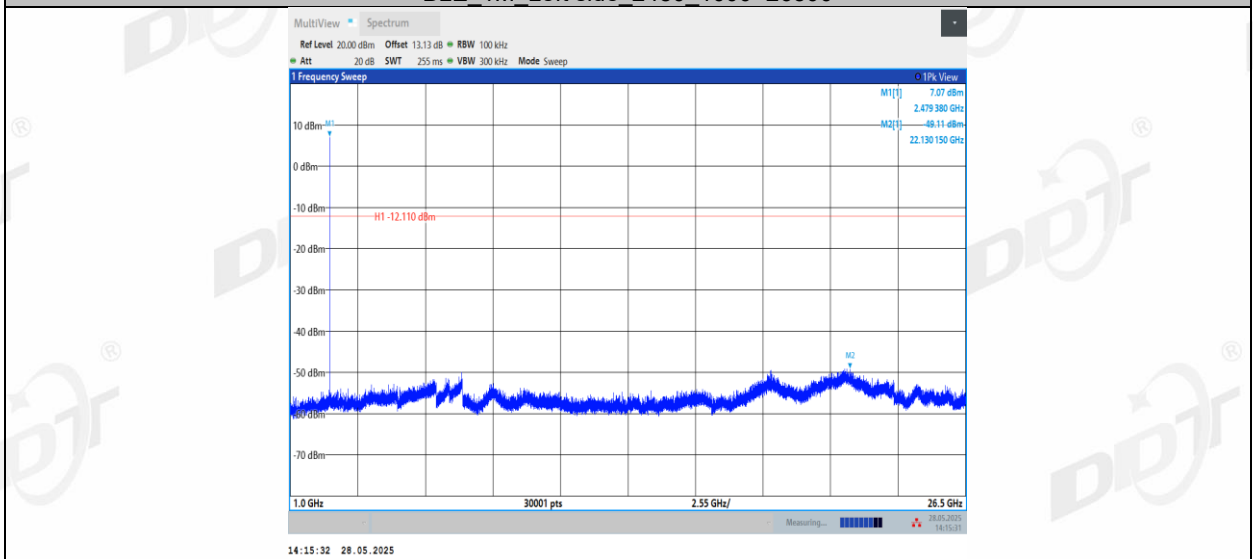


BLE\_1M\_Right side\_2480\_0~Reference

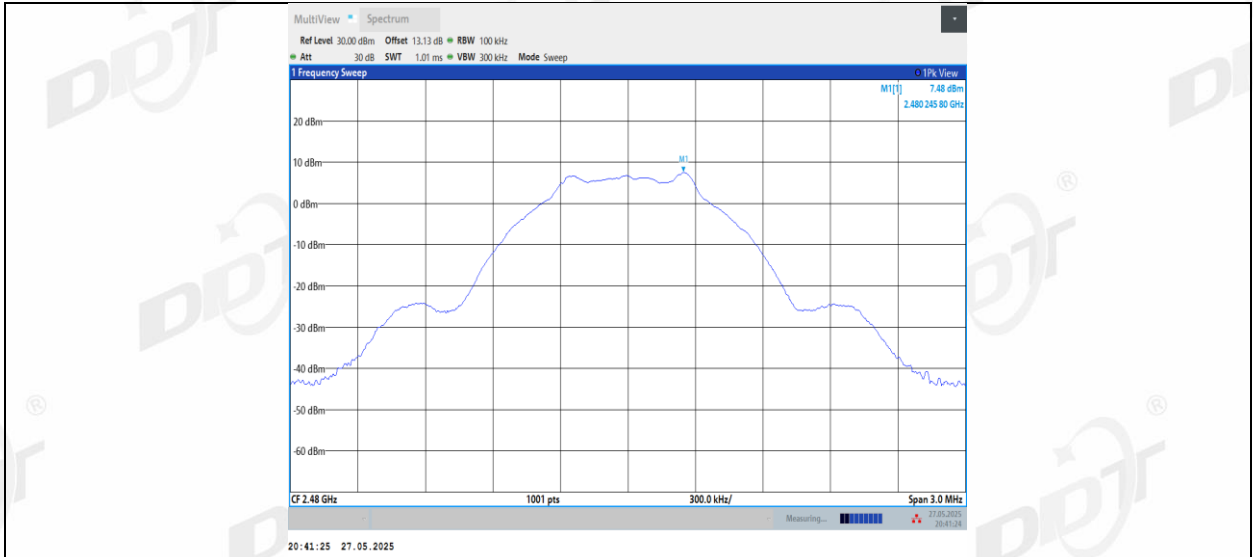


BLE\_1M\_Right side\_2480\_30~1000

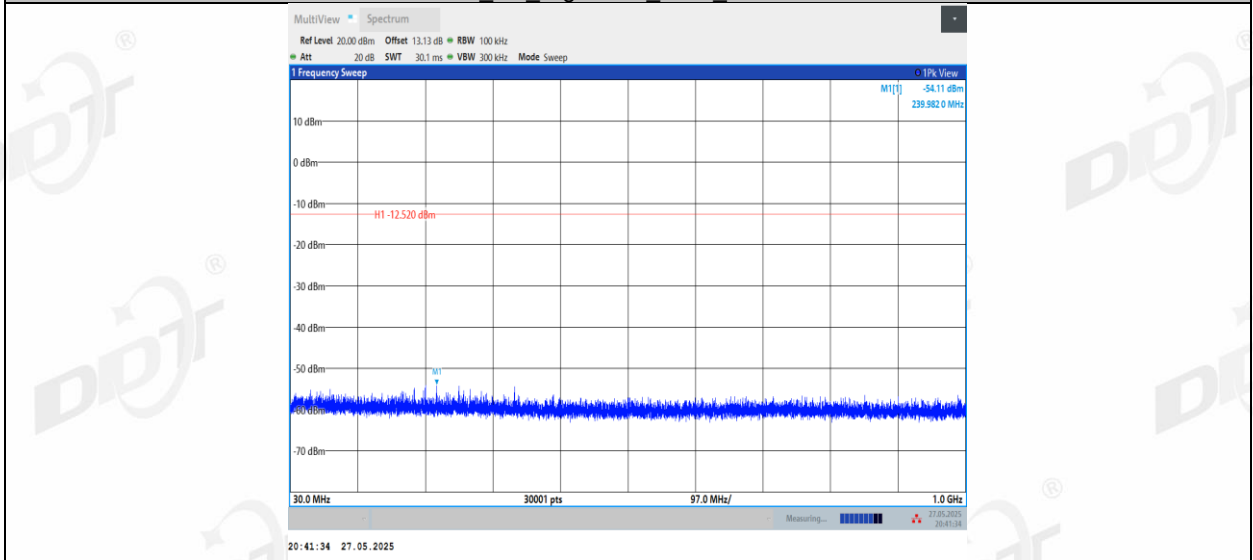


BLE\_1M\_Right side\_2480\_1000~26500

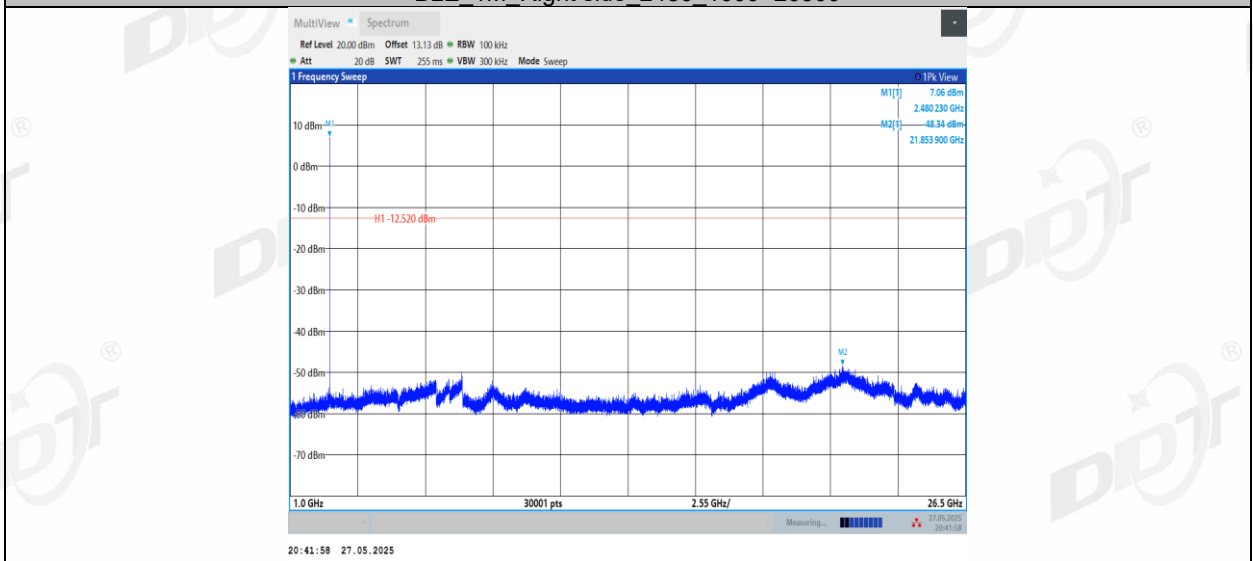


BLE\_2M\_Left side\_2404\_0~Reference

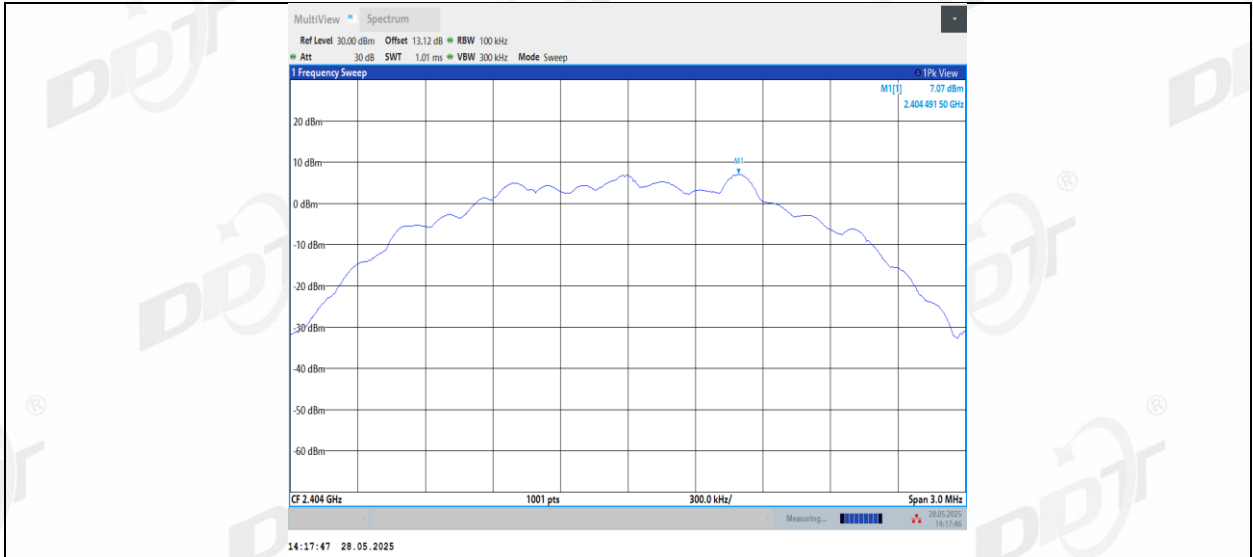

BLE\_2M\_Left side\_2404\_30~1000

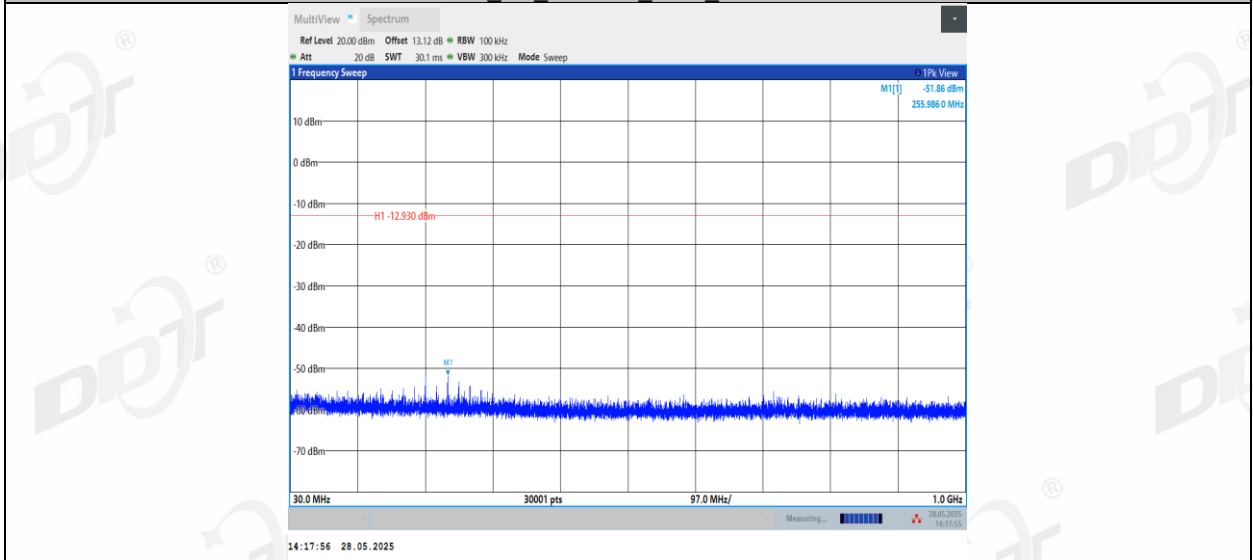

BLE\_2M\_Left side\_2404\_1000~26500

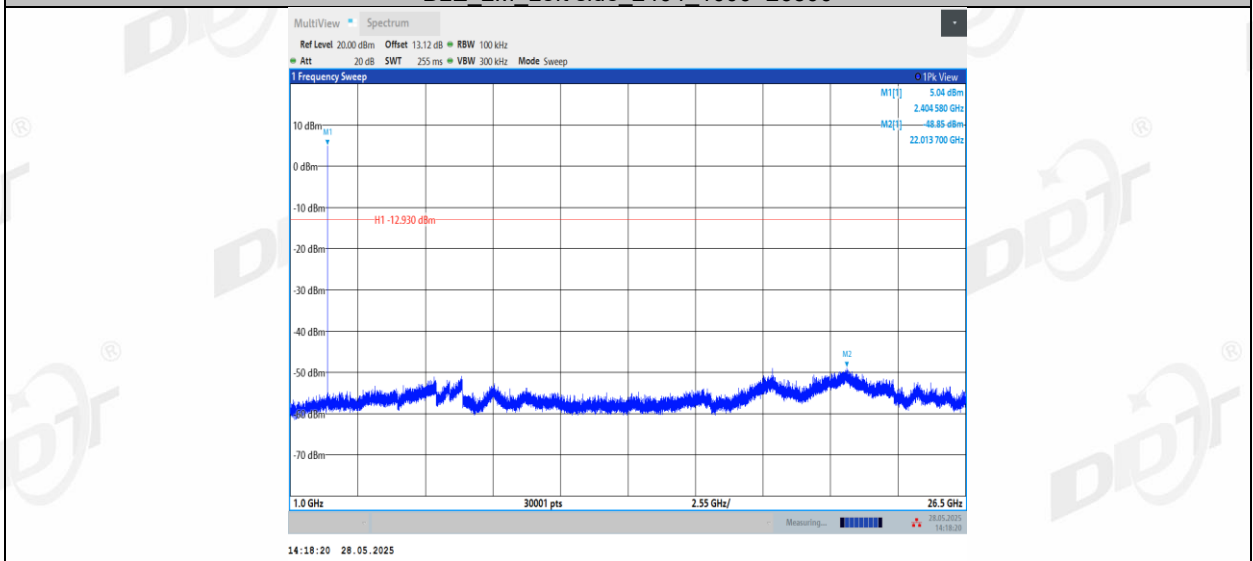

BLE\_2M\_Right side\_2404\_0~Reference