

OTA

R (2064DEBD40E9)							自由状态	L (2064DEBD3E5B)						
信道	TRP	Max	Min	TIS	Max	Min		信道	TRP	Max	Min	TIS	Max	Min
0	4.74	7.85	-6.14	-85.83	-74.97	-89.14		0	2.7	5.36	-3.69	-85.92	-79.54	-88.72
39	6.37	10.13	-5.18	-85.91	-74.37	-90.29		39	5.16	8.94	-2.3	-86.61	-79.2	-90.84
78	5.83	8.74	-4.19	-85.76	-75.79	-88.73		78	5.56	7.84	-3.41	-87.11	-78.18	-89.74

R (2064DEBD40E9)							头模状态	L (2064DEBD3E5B)						
信道	TRP	Max	Min	TIS	Max	Min		信道	TRP	Max	Min	TIS	Max	Min
0	-1.57	3.05	-19.69	-81.43	-67.99	-85.27		0	-2.63	1.74	-19.63	-81.66	-64.83	-86.05
39	-1.07	3.05	-13.97	-80.7	-67.01	-84		39	-1.33	3.23	-21.66	-81.2	-60.91	-85.66
78	-1.19	2.93	-13.68	-79.67	-66.28	-83.44		78	-0.67	4.2	-17.29	-81.02	-64.4	-85.93

安装方式(Installation method):

喇叭线装配示意图 (Left)



电池线装配示意图 (Left)




成品名称：JBL TUNE BEAM(CE-2155N) BT-L天线



版本：A

客户：佳禾


一：成品天线



二：用PE袋包装，每小PE装100PCS产品。
小PE袋封装好后装入大PE袋内。

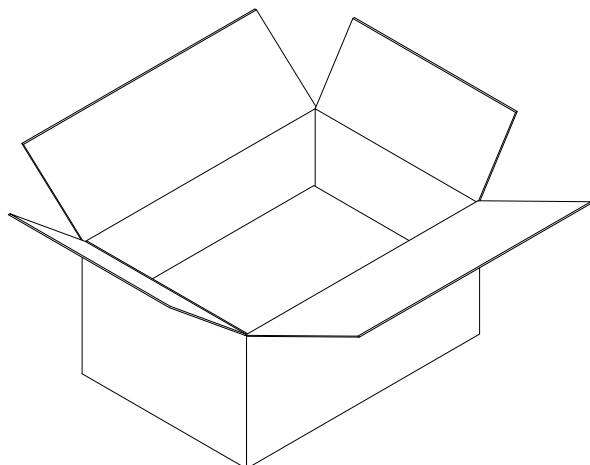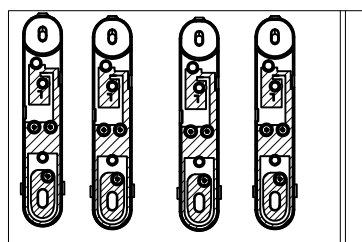

三：装箱，每箱放10大袋，数量以实际包装数为准。

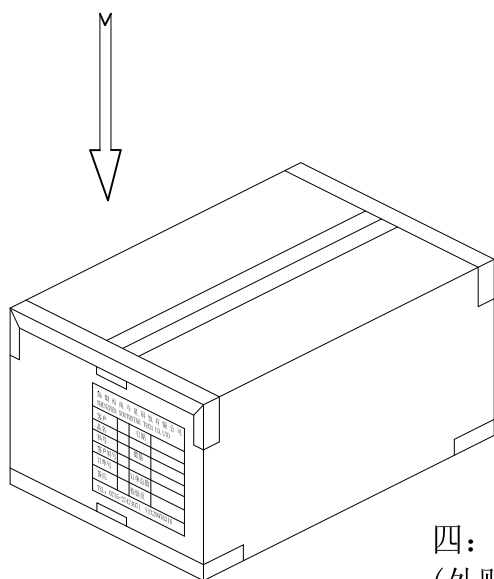

四：封箱，外箱贴我司生产标签
(外贴RoHS、无铅、Pb等标识)。