



■ **Report No.:** DDT-R18093008-1E4 Rev.01

■ **Issued Date:** Mar. 22, 2021

## FCC AND ISCED CERTIFICATION TEST REPORT

### FOR

|                             |   |                                                               |
|-----------------------------|---|---------------------------------------------------------------|
| <b>Applicant</b>            | : | Harman International Industries, Inc.                         |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329,<br>UNITED STATES |
| <b>Equipment under Test</b> | : | Portable Bluetooth Speaker                                    |
| <b>Model No.</b>            | : | XTREME 2Q                                                     |
| <b>Trade Mark</b>           | : | JBL                                                           |
| <b>FCC ID</b>               | : | APIJBLXTREME2Q                                                |
| <b>IC</b>                   | : | 6132A-JBLXTREME2Q                                             |
| <b>Manufacturer</b>         | : | Harman International Industries, Inc.                         |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329,<br>UNITED STATES |

**Issued By: Dongguan Dongdian Testing Service Co., Ltd.**

**Add.:** No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,  
Dongguan City, Guangdong Province, China, 523808

**Tel.:** +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

# REPORT

## Table of Contents

|      |                                                  |    |
|------|--------------------------------------------------|----|
|      | Test report declares.....                        | 3  |
| 1.   | Summary of Test Results.....                     | 5  |
| 2.   | General Test Information .....                   | 6  |
| 2.1. | Description of EUT .....                         | 6  |
| 2.2. | Accessories of EUT.....                          | 7  |
| 2.3. | Assistant equipment used for test.....           | 7  |
| 2.4. | Block diagram of EUT configuration for test..... | 7  |
| 2.5. | Deviations of test standard.....                 | 8  |
| 2.6. | Test environment conditions .....                | 8  |
| 2.7. | Test laboratory.....                             | 8  |
| 2.8. | Measurement uncertainty.....                     | 9  |
| 3.   | Equipment Used During Test.....                  | 10 |
| 4.   | Radiated Emission .....                          | 12 |
| 4.1. | Block diagram of test setup.....                 | 12 |
| 4.2. | Limit.....                                       | 13 |
| 4.3. | Test procedure .....                             | 14 |
| 4.4. | Test result.....                                 | 16 |
| 5.   | Power Line Conducted Emission .....              | 19 |
| 5.1. | Block diagram of test setup.....                 | 19 |
| 5.2. | Power line conducted emission limits .....       | 19 |
| 5.3. | Test procedure .....                             | 19 |
| 5.4. | Test result.....                                 | 20 |

## Test Report Declare

|                             |   |                                                            |
|-----------------------------|---|------------------------------------------------------------|
| <b>Applicant</b>            | : | Harman International Industries, Inc.                      |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |
| <b>Equipment under Test</b> | : | Portable Bluetooth Speaker                                 |
| <b>Model No.</b>            | : | XTREME 2Q                                                  |
| <b>Trade mark</b>           | : | JBL                                                        |
| <b>Manufacturer</b>         | : | Harman International Industries, Inc.                      |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

### Test procedure used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018.

### We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.**

|                         |                          |                      |                               |
|-------------------------|--------------------------|----------------------|-------------------------------|
| <b>Report No.:</b>      | DDT-R18093008-1E4 Rev.01 |                      |                               |
| <b>Date of Receipt:</b> | Mar. 04, 2021            | <b>Date of Test:</b> | Mar. 04, 2021 ~ Mar. 12, 2021 |

**Prepared By:**

*Sam Li*

**Sam Li/Engineer**

**Approved By:**



**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

## Revision History

| Rev.       | Revisions                                                                                                                                                                                                                                                  | Issue Date    | Revised By |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| ---        | Initial issue                                                                                                                                                                                                                                              | Oct. 24, 2018 | Ella Gong  |
| Rev.0<br>1 | This report added a factory and battery cell (IBA001GA) based on the original report, this change doesn't influence the RF performance, so only power line conducted emissions and radiated emission (below 1 GHz) were tested and updated in this report. | Mar. 22, 2021 | Sam Li     |

## 1. Summary of Test Results

| Description of Test Item       | Standard                                                                                                | Results |
|--------------------------------|---------------------------------------------------------------------------------------------------------|---------|
| Radiated Emission              | FCC Part 15: 15.209<br>FCC Part 15: 15.247(d)<br>ANSI C63.10:2013<br>RSS-247 Issue 2<br>RSS-Gen Issue 5 | Pass    |
| Power Line Conducted Emissions | FCC Part 15: 15.207<br>ANSI C63.10:2013<br>RSS-Gen Issue 5                                              | Pass    |

## 2. General Test Information

### 2.1. Description of EUT

|                          |                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------|
| EUT* Name                | : Portable Bluetooth Speaker                                                         |
| Model Number             | : XTREME 2Q                                                                          |
| EUT function description | : Please reference user manual of this device                                        |
| Power supply             | : DC 19V from external AC Adapter<br>DC 7.2V 5000mAh Polymer Li-ion built-in battery |
| Radio Specification      | : Bluetooth V4.2                                                                     |
| Operation frequency      | : 2402 MHz - 2480 MHz                                                                |
| Modulation               | : GFSK, $\pi/4$ -DQPSK, 8DPSK                                                        |
| Data rate                | : 1 Mbps, 2 Mbps, 3 Mbps                                                             |
| Antenna Type             | : Integrated antenna, maximum PK gain: 3.88 dBi                                      |
| Sample Type              | : Series production                                                                  |

Note: EUT is the abbreviation of equipment under test.

| Channel information |                 |         |                 |         |                 |
|---------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0                   | 2402            | 27      | 2429            | 54      | 2456            |
| 1                   | 2403            | 28      | 2430            | 55      | 2457            |
| 2                   | 2404            | 29      | 2431            | 56      | 2458            |
| 3                   | 2405            | 30      | 2432            | 57      | 2459            |
| 4                   | 2406            | 31      | 2433            | 58      | 2460            |
| 5                   | 2407            | 32      | 2434            | 59      | 2461            |
| 6                   | 2408            | 33      | 2435            | 60      | 2462            |
| 7                   | 2409            | 34      | 2436            | 61      | 2463            |
| 8                   | 2410            | 35      | 2437            | 62      | 2464            |
| 9                   | 2411            | 36      | 2438            | 63      | 2465            |
| 10                  | 2412            | 37      | 2439            | 64      | 2466            |
| 11                  | 2413            | 38      | 2440            | 65      | 2467            |
| 12                  | 2414            | 39      | 2441            | 66      | 2468            |
| 13                  | 2415            | 40      | 2442            | 67      | 2469            |
| 14                  | 2416            | 41      | 2443            | 68      | 2470            |
| 15                  | 2417            | 42      | 2444            | 69      | 2471            |
| 16                  | 2418            | 43      | 2445            | 70      | 2472            |
| 17                  | 2419            | 44      | 2446            | 71      | 2473            |
| 18                  | 2420            | 45      | 2447            | 72      | 2474            |
| 19                  | 2421            | 46      | 2448            | 73      | 2475            |
| 20                  | 2422            | 47      | 2449            | 74      | 2476            |
| 21                  | 2423            | 48      | 2450            | 75      | 2477            |
| 22                  | 2424            | 49      | 2451            | 76      | 2478            |
| 23                  | 2425            | 50      | 2452            | 77      | 2479            |
| 24                  | 2426            | 51      | 2453            | 78      | 2480            |
| 25                  | 2427            | 52      | 2454            |         |                 |
| 26                  | 2428            | 53      | 2455            |         |                 |

## 2.2. Accessories of EUT

| Assistant equipment | Manufacturer                               | Model number          | Parameter                                                | Remark               |
|---------------------|--------------------------------------------|-----------------------|----------------------------------------------------------|----------------------|
| AC cable            | Harman                                     | N/A                   | Length: 1.1m, unshielded                                 | Standard Accessories |
| AC Adapter          | Shenzhen Jingquanhua Electronics Co., Ltd. | NSA57ED-190300        | Input: AC 100-240V -50/60Hz, 1.5A;<br>Output: DC 19V, 3A | Alternative          |
| AC Adapter          | SHENZHEN HONOR ELECTRONIC CO., LTD.        | ADS-60JIA-19-2 19057E | Input: AC 100-240V -50/60Hz, 1.5A;<br>Output: DC 19V, 3A |                      |
| Built-in Battery    | Sunwoda Electronic Co., Ltd.               | SUN-INTE-103          | DC 7.2V, 5000mAh, 36Wh                                   | Alternative          |
| Built-in Battery    | ICON ENERGY SYSTEM (SHENZHEN) CO., LTD.    | ID1019                | DC 7.2V, 5000mAh, 36Wh                                   |                      |

Both AC Adapters and Built-in Batteries had been evaluated, the worst case was record in this report.

New battery information:

| Description of Accessories  | Manufacturer                           | Model number | Parameter     | Remark |
|-----------------------------|----------------------------------------|--------------|---------------|--------|
| Rechargeable Li-ion Battery | ICON ENERGY SYSTEM (SHENZHEN) CO., LTD | IBA001GA     | 7.26V/5000mAh | N/A    |

## 2.3. Assistant equipment used for test

| Assistant equipment | Manufacturer | Model number  | EMC Compliance | SN                |
|---------------------|--------------|---------------|----------------|-------------------|
| Notebook            | DELL         | Latitude D610 | FCC DOC        | 00045-534-136-300 |

## 2.4. Block diagram of EUT configuration for test



Test software: BlueTest3.EXE

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

| Tested mode, channel, information  |             |                 |
|------------------------------------|-------------|-----------------|
| Mode                               | Channel     | Frequency (MHz) |
| GFSK hopping on Tx mode            | CH0 to CH78 | 2402 to 2480    |
| $\pi/4$ -DQPSK hopping on Tx mode  | CH0 to CH78 | 2402 to 2480    |
| 8DPSK hopping on Tx mode           | CH0 to CH78 | 2402 to 2480    |
| GFSK hopping off Tx mode           | CH0         | 2402            |
|                                    | CH39        | 2441            |
|                                    | CH78        | 2480            |
| $\pi/4$ -DQPSK hopping off Tx mode | CH0         | 2402            |
|                                    | CH39        | 2441            |
|                                    | CH78        | 2480            |
| 8DPSK hopping off Tx mode          | CH0         | 2402            |
|                                    | CH39        | 2441            |
|                                    | CH78        | 2480            |

Note: For  $\pi/4$ -DQPSK its same modulation type with 8DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, except the RF output power, all the other items finally test were only performed with the worse case 8DPSK and GFSK.

## 2.5. Deviations of test standard

No deviation.

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |            |
|--------------------|------------|
| Temperature range: | 21-25 °C   |
| Humidity range:    | 40-75%     |
| Pressure range:    | 86-106 kPa |

## 2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com)

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

## 2.8. Measurement uncertainty

| Test Item                                                                                                                                     | Uncertainty                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Bandwidth                                                                                                                                     | 1.1%                                                   |
| Peak Output Power (Conducted) (Spectrum analyzer)                                                                                             | 0.86 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); |
|                                                                                                                                               | 1.38 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )   |
| Peak Output Power (Conducted) (Power Sensor)                                                                                                  | 0.74 dB                                                |
| Power Spectral Density                                                                                                                        | 0.74 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); |
|                                                                                                                                               | 1.38 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )   |
| Frequencies Stability                                                                                                                         | $6.7 \times 10^{-8}$ (Antenna couple method)           |
|                                                                                                                                               | $5.5 \times 10^{-8}$ (Conducted method)                |
| Conducted spurious emissions                                                                                                                  | 0.86 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); |
|                                                                                                                                               | 1.40 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )   |
|                                                                                                                                               | 1.66 dB ( $8 \text{ GHz} \leq f < 22 \text{ GHz}$ )    |
| Uncertainty for radio frequency (RBW < 20 kHz)                                                                                                | $3 \times 10^{-8}$                                     |
| Temperature                                                                                                                                   | 0.4°C                                                  |
| Humidity                                                                                                                                      | 2%                                                     |
| Uncertainty for Radiation Emission test (30 MHz - 1 GHz)                                                                                      | 4.70 dB (Antenna Polarize: V)                          |
|                                                                                                                                               | 4.84 dB (Antenna Polarize: H)                          |
| Uncertainty for Radiation Emission test (1 GHz - 40 GHz)                                                                                      | 4.10 dB (1-6 GHz)                                      |
|                                                                                                                                               | 4.40 dB (6 GHz - 18 GHz)                               |
|                                                                                                                                               | 3.54 dB (18 GHz - 26 GHz)                              |
|                                                                                                                                               | 4.30 dB (26 GHz - 40 GHz)                              |
| Uncertainty for Power line conduction emission test                                                                                           | 3.32 dB (150 kHz - 30 MHz)                             |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                                                        |

### 3. Equipment Used During Test


| Equipment                                                                      | Manufacturer | Model No.       | Serial No.        | Last Cal.     | Cal. Interval |
|--------------------------------------------------------------------------------|--------------|-----------------|-------------------|---------------|---------------|
| <input type="checkbox"/> RF Connected Test (Tonscend RF Measurement System 1#) |              |                 |                   |               |               |
| Spectrum analyzer                                                              | R&S          | FSU26           | 101272            | Jul. 01, 2020 | 1 Year        |
| Spectrum analyzer                                                              | Agilent      | N9020D          | MY49100362        | Sep. 28, 2020 | 1 Year        |
| Wideband Radio Communication tester                                            | R&S          | CMW500          | 117491            | Jul. 01, 2020 | 1 Year        |
| Vector Signal Generator                                                        | Agilent      | E8267D          | US49060192        | Sep. 24, 2020 | 1 Year        |
| Vector Signal Generator                                                        | Agilent      | N5182A          | MY48180737        | Jul. 01, 2020 | 1 Year        |
| Power Sensor                                                                   | Agilent      | U2021XA         | MY55150010        | Jul. 01, 2020 | 1 Year        |
| Power Sensor                                                                   | Agilent      | U2021XA         | MY55150011        | Jul. 01, 2020 | 1 Year        |
| DC Power Source                                                                | MATRIS       | MPS-3005L-3     | D813058W          | Apr. 25, 2020 | 1 Year        |
| RF Cable                                                                       | Micable      | C10-01-01-1     | 100309            | Sep. 28, 2020 | 1 Year        |
| Temp&Humi Programmable                                                         | ZHIXIANG     | ZXGDJS-150L     | ZX170110-A        | Jul. 01, 2020 | 1 Year        |
| Test Software                                                                  | JS Tonscend  | JS1120-3        | Ver.2.7           | N/A           | N/A           |
| <input type="checkbox"/> RF Connected Test (Tonscend RF Measurement System 2#) |              |                 |                   |               |               |
| Spectrum analyzer                                                              | R&S          | FSU26           | 200071            | Sep. 25, 2020 | 1 Year        |
| Spectrum analyzer                                                              | Agilent      | N9020D          | MY49100362        | Sep. 28, 2020 | 1 Year        |
| Wideband Radio Communication tester                                            | R&S          | CMW500          | 117491            | Jul. 01, 2020 | 1 Year        |
| Vector Signal Generator                                                        | Agilent      | N5182A          | MY19060405        | Jul. 01, 2020 | 1 Year        |
| Vector Signal Generator                                                        | Agilent      | N5182A          | MY48180912        | Jul. 01, 2020 | 1 Year        |
| RF Control Unit                                                                | Tonsend      | JS0806-2        | DDT-ZC01449       | Jul. 01, 2020 | 1 Year        |
| DC Power Source                                                                | MATRIS       | MPS-3005L-3     | D813058W          | Apr. 25, 2020 | 1 Year        |
| RF Cable                                                                       | Micable      | C10-01-01-1     | 100309            | Sep. 28, 2020 | 1 Year        |
| Temp&Humi Programmable                                                         | ZHIXIANG     | ZXGDJS-150L     | ZX170110-A        | Jul. 01, 2020 | 1 Year        |
| Test Software                                                                  | JS Tonscend  | JS1120-3        | Ver.2.7           | N/A           | N/A           |
| <input type="checkbox"/> Radiation 1#chamber                                   |              |                 |                   |               |               |
| EMI Test Receiver                                                              | R&S          | ESU8            | 100316            | Sep. 24, 2020 | 1 Year        |
| Spectrum analyzer                                                              | Agilent      | E4447A          | MY50180031        | Jul. 01, 2020 | 1 Year        |
| Trilog Broadband Antenna                                                       | Schwarzbeck  | VULB9163        | 9163-462          | Nov. 13, 2020 | 1 Year        |
| Active Loop antenna                                                            | Schwarzbeck  | FMZB-1519       | 1519-038          | Nov. 18, 2020 | 1 Year        |
| Double Ridged Horn Antenna                                                     | R&S          | HF907           | 100276            | Nov. 13, 2020 | 1 Year        |
| Broad Band Horn Antenna                                                        | Schwarzbeck  | BBHA 9170       | 790               | Apr. 11, 2020 | 1 Year        |
| Pre-amplifier                                                                  | A.H.         | PAM-0118        | 360               | Sep. 28, 2020 | 1 Year        |
| RF Cable                                                                       | HUBSER       | CP-X2+<br>CP-X1 | W11.03+<br>W12.02 | Sep. 24, 2020 | 1 Year        |

|                                                                                   |             |               |                   |               |        |
|-----------------------------------------------------------------------------------|-------------|---------------|-------------------|---------------|--------|
| RF Cable                                                                          | N/A         | 5m+6m+1m      | 06270619          | Sep. 30, 2020 | 1 Year |
| MI Cable                                                                          | HUBSER      | C10-01-01-1M  | 1091629           | Sep. 30, 2020 | 1 Year |
| Test software                                                                     | Audix       | E3            | V 6.11111b        | N/A           | N/A    |
| <input checked="" type="checkbox"/> <b>Radiation 2#chamber</b>                    |             |               |                   |               |        |
| EMI Test Receiver                                                                 | R&S         | ESCI          | 101364            | Sep. 28, 2020 | 1 Year |
| Spectrum analyzer                                                                 | Agilent     | E4447A        | MY50180031        | Jul. 01, 2020 | 1 Year |
| Trilog Broadband Antenna                                                          | Schwarzbeck | VULB 9163     | 9163-994          | Nov. 13, 2020 | 1 Year |
| Active Loop antenna                                                               | Schwarzbeck | FMZB-1519     | 1519-038          | Nov. 18, 2020 | 1 Year |
| Double Ridged Horn Antenna                                                        | Schwarzbeck | BBHA9120      | 02108             | Jul. 11, 2020 | 1 Year |
| Broad Band Horn Antenna                                                           | Schwarzbeck | BBHA 9170     | 790               | Apr. 11, 2020 | 1 Year |
| Pre-amplifier                                                                     | TERA-MW     | TRLA-0040 G35 | 1013 03           | Sep. 28, 2020 | 1 Year |
| RF Cable                                                                          | N/A         | 14+1.5m       | 06270619          | Sep. 28, 2020 | 1 Year |
| Test software                                                                     | Audix       | E3            | V 6.11111b        | N/A           | N/A    |
| <input checked="" type="checkbox"/> <b>Power Line Conducted Emissions Test 1#</b> |             |               |                   |               |        |
| EMI Test Receiver                                                                 | R&S         | ESU8          | 100316            | Sep. 24, 2020 | 1 Year |
| LISN 1                                                                            | R&S         | ENV216        | 101109            | Sep. 28, 2020 | 1 Year |
| LISN 2                                                                            | R&S         | ESH2-Z5       | 100309            | Sep. 28, 2020 | 1 Year |
| Pulse Limiter                                                                     | R&S         | ESH3-Z2       | 101242            | Sep. 24, 2020 | 1 Year |
| CE Cable 1                                                                        | HUBSER      | N/A           | W10.01            | Sep. 24, 2020 | 1 Year |
| Test software                                                                     | Audix       | E3            | V 6.11111b        | N/A           | N/A    |
| <input type="checkbox"/> <b>Power Line Conducted Emissions Test 2#</b>            |             |               |                   |               |        |
| Test Receiver                                                                     | R&S         | ESPI          | 101761            | Sep. 24, 2020 | 1 Year |
| LISN 1                                                                            | R&S         | ENV216        | 101170            | Sep. 28, 2020 | 1 Year |
| LISN 2                                                                            | R&S         | ESH2-Z5       | 100309            | Sep. 28, 2020 | 1 Year |
| Pulse Limiter                                                                     | R&S         | KH43101       | 43101180156 8-12# | Jul. 01, 2020 | 1 Year |
| CE Cable 2                                                                        | HUBSER      | N/A           | W11.02            | Sep. 24, 2020 | 1 Year |
| Test software                                                                     | Audix       | E3            | V 6.11111b        | N/A           | N/A    |


## 4. Radiated Emission

### 4.1. Block diagram of test setup


In 3 m Anechoic Chamber Test Setup Diagram for 9 kHz - 30 MHz

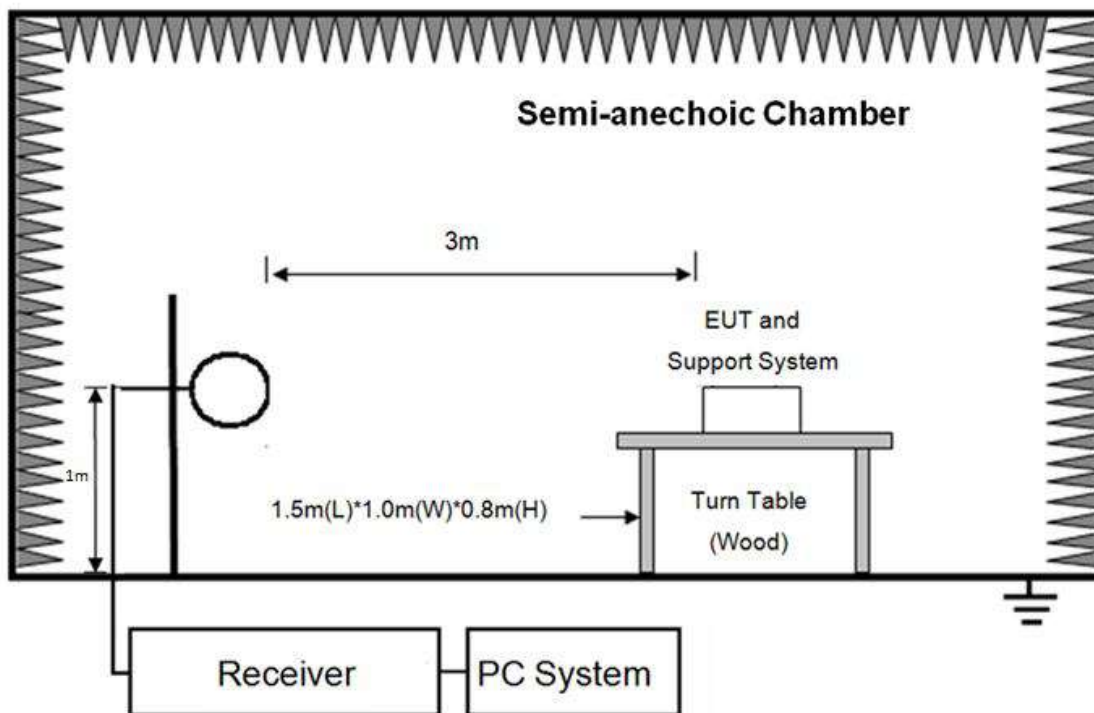

In 3 m Anechoic Chamber Test Setup Diagram for below 1 GHz

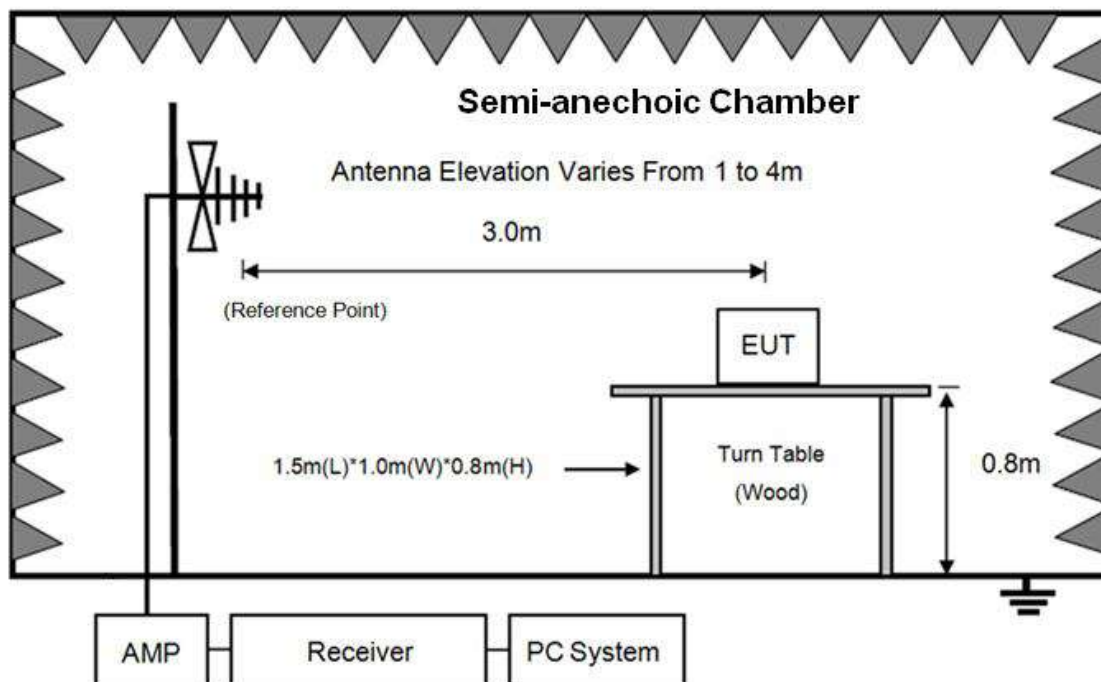

In 3 m Anechoic Chamber Test Setup Diagram for frequency above 1 GHz

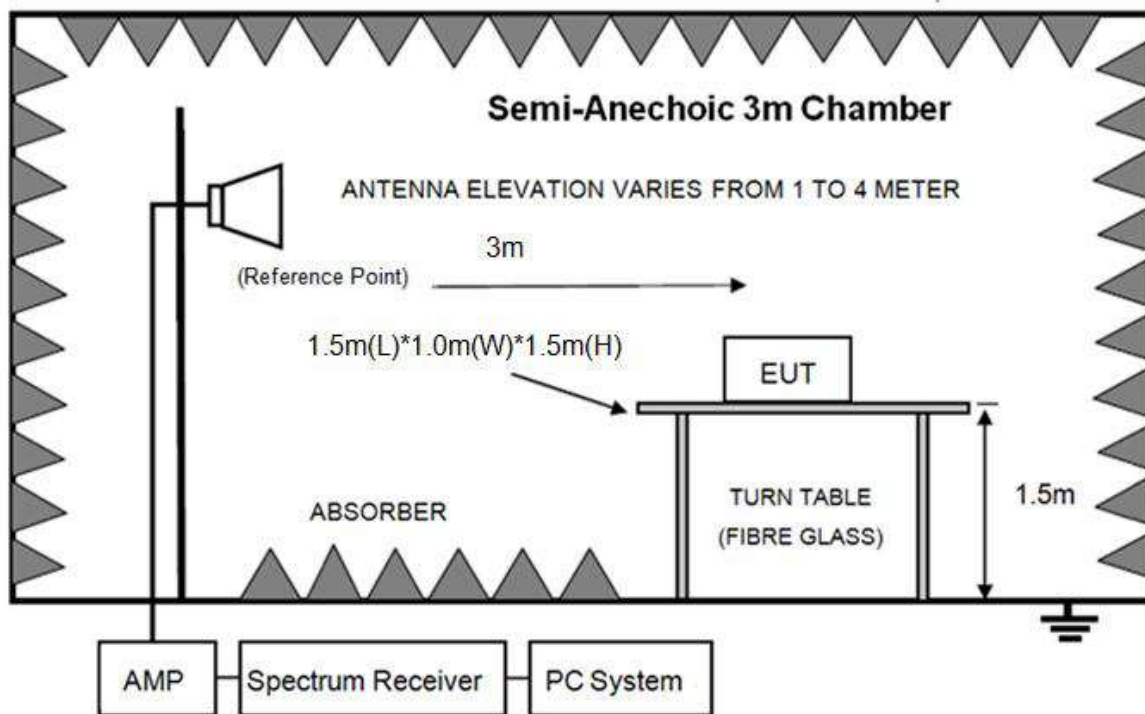

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

#### 4.2. Limit

(1) FCC 15.205 Restricted frequency band

| MHz               | MHz                 | MHz           | GHz              |
|-------------------|---------------------|---------------|------------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.1772&4.17775    | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.2072&4.20775    | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41       |                     |               |                  |

## (2) FCC 15.209 Limit.

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                                                     |                                   |
|------------------|--------------------|---------------------------------------------------------------------------|-----------------------------------|
|                  |                    | $\mu\text{V}/\text{m}$                                                    | $\text{dB}(\mu\text{V})/\text{m}$ |
| 0.009 ~ 0.490    | 300                | 2400/F(kHz)                                                               | 67.6-20log(F)                     |
| 0.490 ~ 1.705    | 30                 | 24000/F(kHz)                                                              | 87.6-20log(F)                     |
| 1.705 ~ 30.0     | 30                 | 30                                                                        | 29.54                             |
| 30 ~ 88          | 3                  | 100                                                                       | 40.0                              |
| 88 ~ 216         | 3                  | 150                                                                       | 43.5                              |
| 216 ~ 960        | 3                  | 200                                                                       | 46.0                              |
| 960 ~ 1000       | 3                  | 500                                                                       | 54.0                              |
| Above 1000       | 3                  | 74.0 dB( $\mu\text{V}$ )/m (Peak)<br>54.0 dB( $\mu\text{V}$ )/m (Average) |                                   |

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

## (3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions, or comply with 15.209 limits.

#### 4.3. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1G.

(2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

| Test frequency range | Test antenna used                              | Test antenna distance |
|----------------------|------------------------------------------------|-----------------------|
| 9 kHz - 30 MHz       | Active Loop antenna                            | 3 m                   |
| 30 MHz - 1 GHz       | Trilog Broadband Antenna                       | 3 m                   |
| 1 GHz - 18 GHz       | Double Ridged Horn Antenna<br>(1 GHz - 18 GHz) | 3 m                   |
| 18 GHz - 40 GHz      | Horn Antenna<br>(18 GHz - 40 GHz)              | 1 m                   |

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission.

Measurements in both horizontal and vertical polarities were made and the data was recorded.

In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz -

490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

| Frequency band   | RBW     |
|------------------|---------|
| 9 kHz - 150 kHz  | 200 Hz  |
| 150 kHz - 30 MHz | 9 kHz   |
| 30 MHz - 1 GHz   | 120 kHz |

(7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure).

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

#### 4.4. Test result

##### **Pass. (See below detailed test result)**

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 8DPSK, Tx 2402 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

## Radiated Emission test (below 1 GHz)

## TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21022009-4E XTREME 2Q\FCC  
BELOW 1G.EM6

Test Date : 2021-03-03

Tested By : Jacky

EUT : Portable Bluetooth Speaker

Model Number : XTREME 2Q

Power Supply : Battery

Test Mode : Tx mode


Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa

Antenna/Distance : 2020 VULB 9163 2#/3m/VERTICAL

Memo :

Data:

1

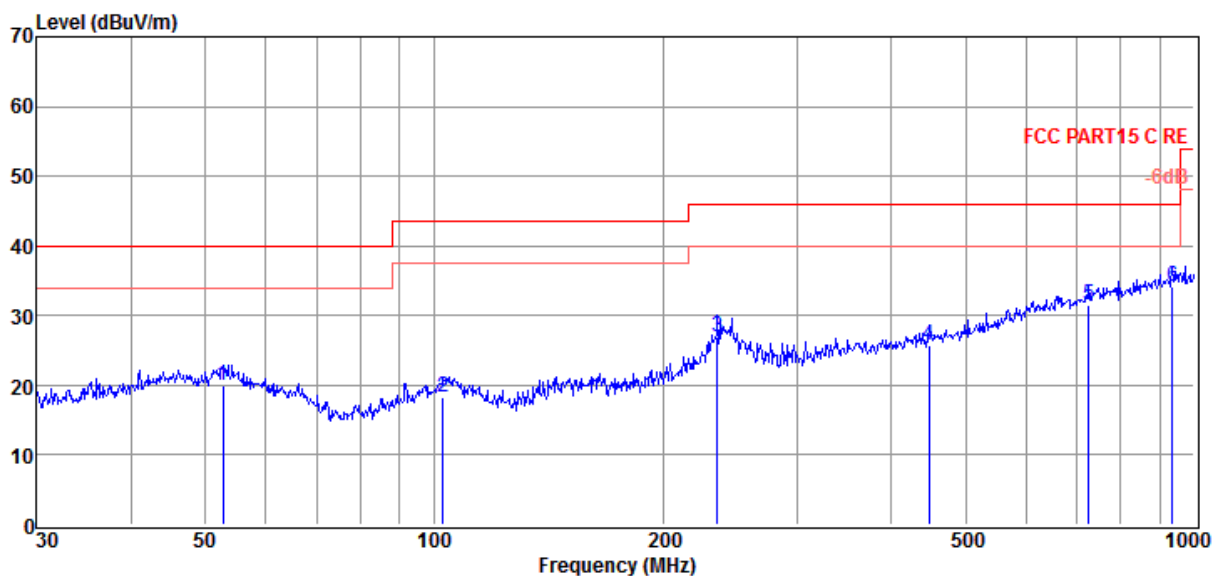

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 52.76          | 2.36                    | 13.68                       | 3.88                | 19.92                       | 40.00                     | -20.08                | QP       | VERTICAL     |
| 2              | 102.72         | 1.80                    | 11.98                       | 4.42                | 18.20                       | 43.50                     | -25.30                | QP       | VERTICAL     |
| 3              | 235.82         | 9.70                    | 12.08                       | 5.21                | 26.99                       | 46.00                     | -19.01                | QP       | VERTICAL     |
| 4              | 447.98         | 3.37                    | 16.19                       | 6.10                | 25.66                       | 46.00                     | -20.34                | QP       | VERTICAL     |
| 5              | 726.81         | 4.00                    | 20.30                       | 7.15                | 31.45                       | 46.00                     | -14.55                | QP       | VERTICAL     |
| 6              | 935.55         | 4.34                    | 21.97                       | 7.81                | 34.12                       | 46.00                     | -11.88                | QP       | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21022009-4E XTREME 2Q\FCC  
BELOW 1G.EM6

**Test Date** : 2021-03-03

**Tested By** : Jacky

**EUT** : Portable Bluetooth Speaker

**Model Number** : XTREME 2Q

**Power Supply** : Battery


**Test Mode** : Tx mode

**Condition** : Temp:24.5°C,Humi:55%,Press:101.4kPa

**Antenna/Distance** : 2020 VULB 9163 2#/3m/HORIZONTAL

**Memo** :

Data:  
2

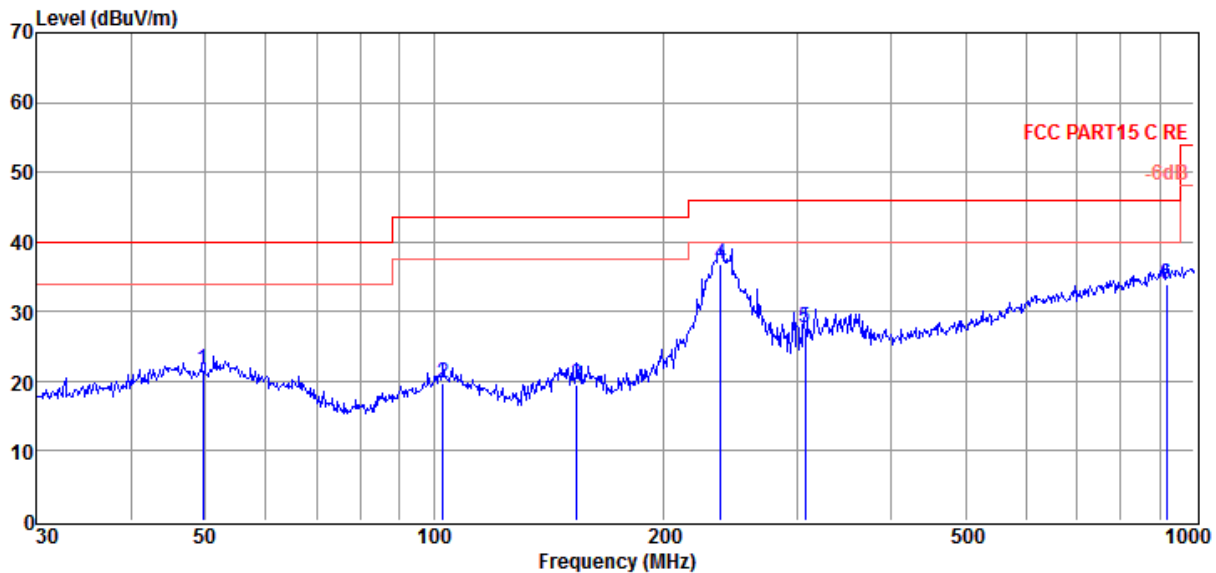

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBuV/m) | Limit<br>Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 49.71          | 5.32                    | 12.57                       | 3.85                | 21.74                       | 40.00                     | -18.26                | QP       | HORIZONTAL   |
| 2              | 102.72         | 3.22                    | 11.98                       | 4.42                | 19.62                       | 43.50                     | -23.88                | QP       | HORIZONTAL   |
| 3              | 154.28         | 6.79                    | 8.02                        | 4.78                | 19.59                       | 43.50                     | -23.91                | QP       | HORIZONTAL   |
| 4              | 238.31         | 19.48                   | 12.21                       | 5.22                | 36.91                       | 46.00                     | -9.09                 | QP       | HORIZONTAL   |
| 5              | 307.83         | 8.45                    | 13.58                       | 5.52                | 27.55                       | 46.00                     | -18.45                | QP       | HORIZONTAL   |
| 6              | 919.29         | 4.16                    | 21.94                       | 7.76                | 33.86                       | 46.00                     | -12.14                | QP       | HORIZONTAL   |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## 5. Power Line Conducted Emission

### 5.1. Block diagram of test setup

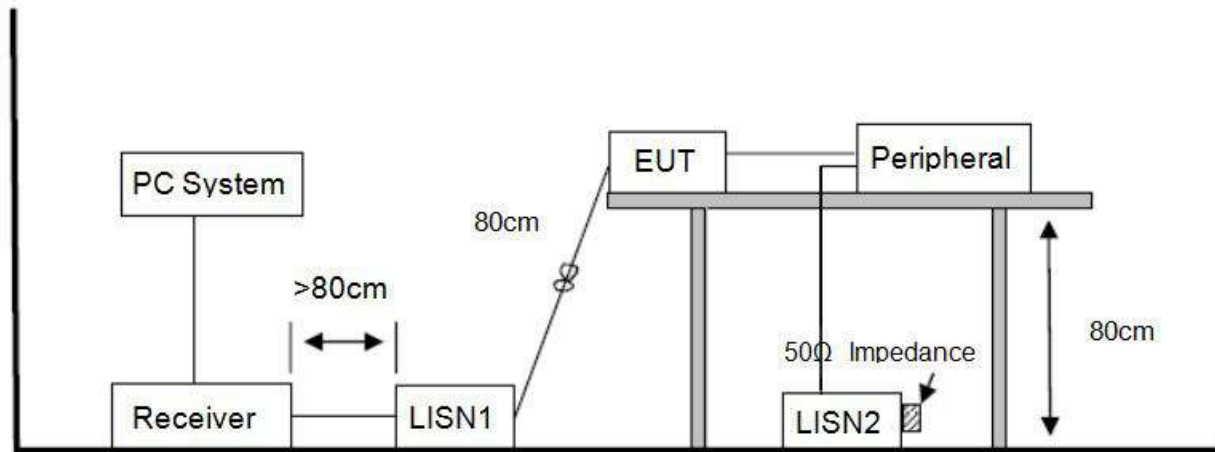

### 5.2. Power line conducted emission limits

| Frequency         | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
|-------------------|----------------------------------|-------------------------------|
| 150 kHz ~ 500 kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500 kHz ~ 5 MHz   | 56                               | 46                            |
| 5 MHz ~ 30 MHz    | 60                               | 50                            |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 5.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were

recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### 5.4. Test result

**Pass. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room

D:\2021 CE report date\Q21022009-4E\20210304 CE.EM6

**Test Date** : 2021-03-04

**Tested By** : Bote Huang

**EUT** : Portable Bluetooth Speaker

**Model Number** : XTREME 2Q

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx mode

**Condition** : TEMP:24.8°C, RH:53.8%, BP:101.4kPa **LISN**

: 2020 ENV 216 1#/LINE

**Memo** :

Data: 14

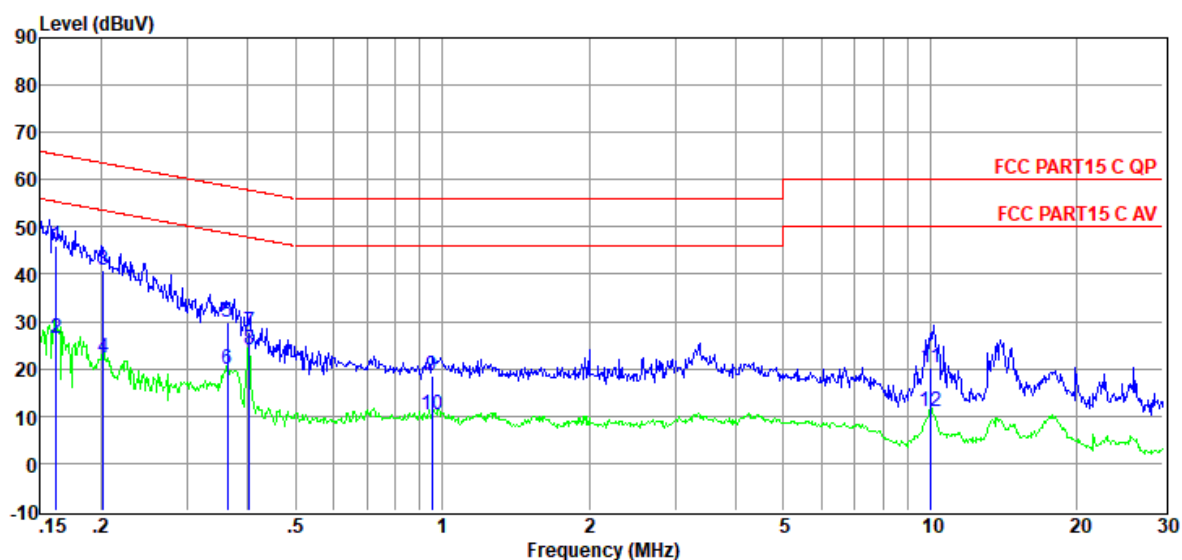

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|-------|
| (Mark) | (MHz) | (dBuV)     | (dB)        | (dB)       | (dB)                 | (dBuV)       | (dBuV)     | (dB)       |          |       |
| 1      | 0.16  | 26.76      | 9.39        | 0.02       | 9.86                 | 46.03        | 65.38      | -19.35     | QP       | LINE  |
| 2      | 0.16  | 7.31       | 9.39        | 0.02       | 9.86                 | 26.58        | 55.38      | -28.80     | Average  | LINE  |
| 3      | 0.20  | 21.51      | 9.40        | 0.02       | 9.86                 | 40.79        | 63.54      | -22.75     | QP       | LINE  |
| 4      | 0.20  | 3.03       | 9.40        | 0.02       | 9.86                 | 22.31        | 53.54      | -31.23     | Average  | LINE  |
| 5      | 0.36  | 10.72      | 9.41        | 0.02       | 9.86                 | 30.01        | 58.65      | -28.64     | QP       | LINE  |
| 6      | 0.36  | 0.76       | 9.41        | 0.02       | 9.86                 | 20.05        | 48.65      | -28.60     | Average  | LINE  |
| 7      | 0.40  | 8.52       | 9.41        | 0.02       | 9.86                 | 27.81        | 57.81      | -30.00     | QP       | LINE  |
| 8      | 0.40  | 4.62       | 9.41        | 0.02       | 9.86                 | 23.91        | 47.81      | -23.90     | Average  | LINE  |
| 9      | 0.95  | -0.67      | 9.42        | 0.03       | 9.86                 | 18.64        | 56.00      | -37.36     | QP       | LINE  |
| 10     | 0.95  | -9.00      | 9.42        | 0.03       | 9.86                 | 10.31        | 46.00      | -35.69     | Average  | LINE  |
| 11     | 10.02 | 0.76       | 9.59        | 0.11       | 9.89                 | 20.35        | 60.00      | -39.65     | QP       | LINE  |
| 12     | 10.02 | -8.68      | 9.59        | 0.11       | 9.89                 | 10.91        | 50.00      | -39.09     | Average  | LINE  |

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **D:\2021 CE report date\Q21022009-4E\20210304 CE.EM6**  
**Test Date** : 2021-03-04 **Tested By** : Bote Huang  
**EUT** : Portable Bluetooth Speaker **Model Number** : XTREME 2Q  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx mode  
**Condition** : TEMP:24.8°C, RH:53.8%, BP:101.4kPa **LISN** : 2020 ENV 216 1#/NEUTRAL

**Memo** :

Data: 16

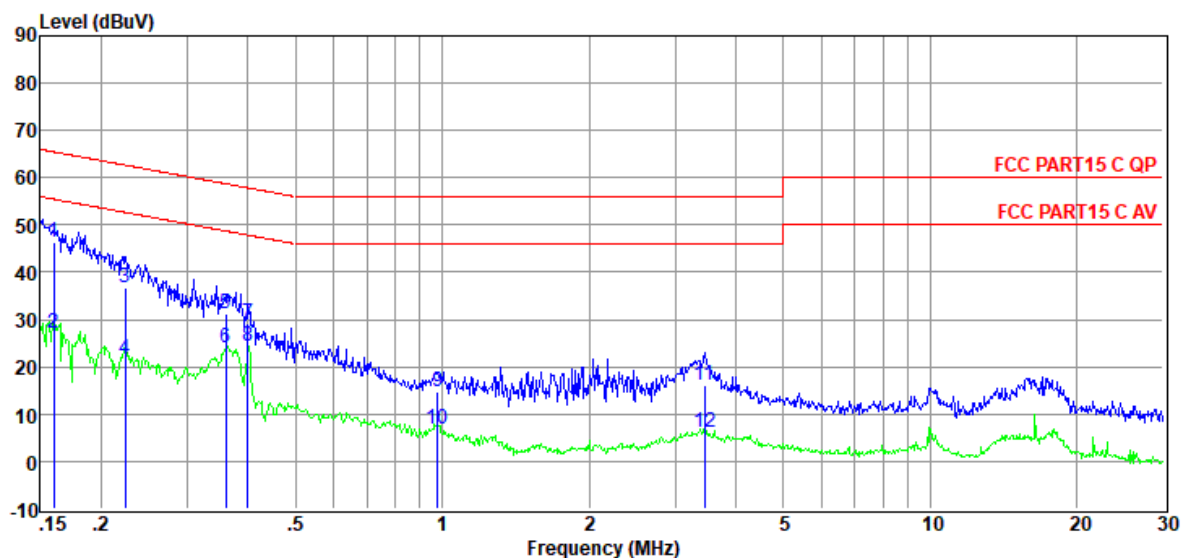

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase   |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|---------|
| (Mark) | (MHz) | (dBuV)     | (dB)        | (dB)       | (dB)                 | (dBuV)       | (dBuV)     | (dB)       |          |         |
| 1      | 0.16  | 27.20      | 9.38        | 0.02       | 9.86                 | 46.46        | 65.47      | -19.01     | QP       | NEUTRAL |
| 2      | 0.16  | 7.93       | 9.38        | 0.02       | 9.86                 | 27.19        | 55.47      | -28.28     | Average  | NEUTRAL |
| 3      | 0.22  | 17.59      | 9.37        | 0.02       | 9.86                 | 36.84        | 62.66      | -25.82     | QP       | NEUTRAL |
| 4      | 0.22  | 2.44       | 9.37        | 0.02       | 9.86                 | 21.69        | 52.66      | -30.97     | Average  | NEUTRAL |
| 5      | 0.36  | 12.06      | 9.38        | 0.02       | 9.86                 | 31.32        | 58.74      | -27.42     | QP       | NEUTRAL |
| 6      | 0.36  | 4.65       | 9.38        | 0.02       | 9.86                 | 23.91        | 48.74      | -24.83     | Average  | NEUTRAL |
| 7      | 0.40  | 10.00      | 9.39        | 0.02       | 9.86                 | 29.27        | 57.86      | -28.59     | QP       | NEUTRAL |
| 8      | 0.40  | 5.04       | 9.39        | 0.02       | 9.86                 | 24.31        | 47.86      | -23.55     | Average  | NEUTRAL |
| 9      | 0.98  | -4.65      | 9.39        | 0.03       | 9.86                 | 14.63        | 56.00      | -41.37     | QP       | NEUTRAL |
| 10     | 0.98  | -12.30     | 9.39        | 0.03       | 9.86                 | 6.98         | 46.00      | -39.02     | Average  | NEUTRAL |
| 11     | 3.45  | -3.34      | 9.42        | 0.07       | 9.87                 | 16.02        | 56.00      | -39.98     | QP       | NEUTRAL |
| 12     | 3.45  | -13.32     | 9.42        | 0.07       | 9.87                 | 6.04         | 46.00      | -39.96     | Average  | NEUTRAL |

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

END OF REPORT