
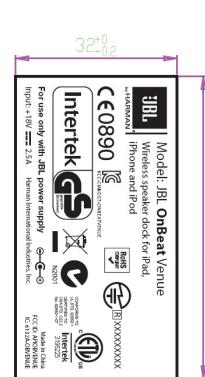


RevNo.	Symbol	Description	Checked/ Date	Approved/ Date
V0.1		First release		

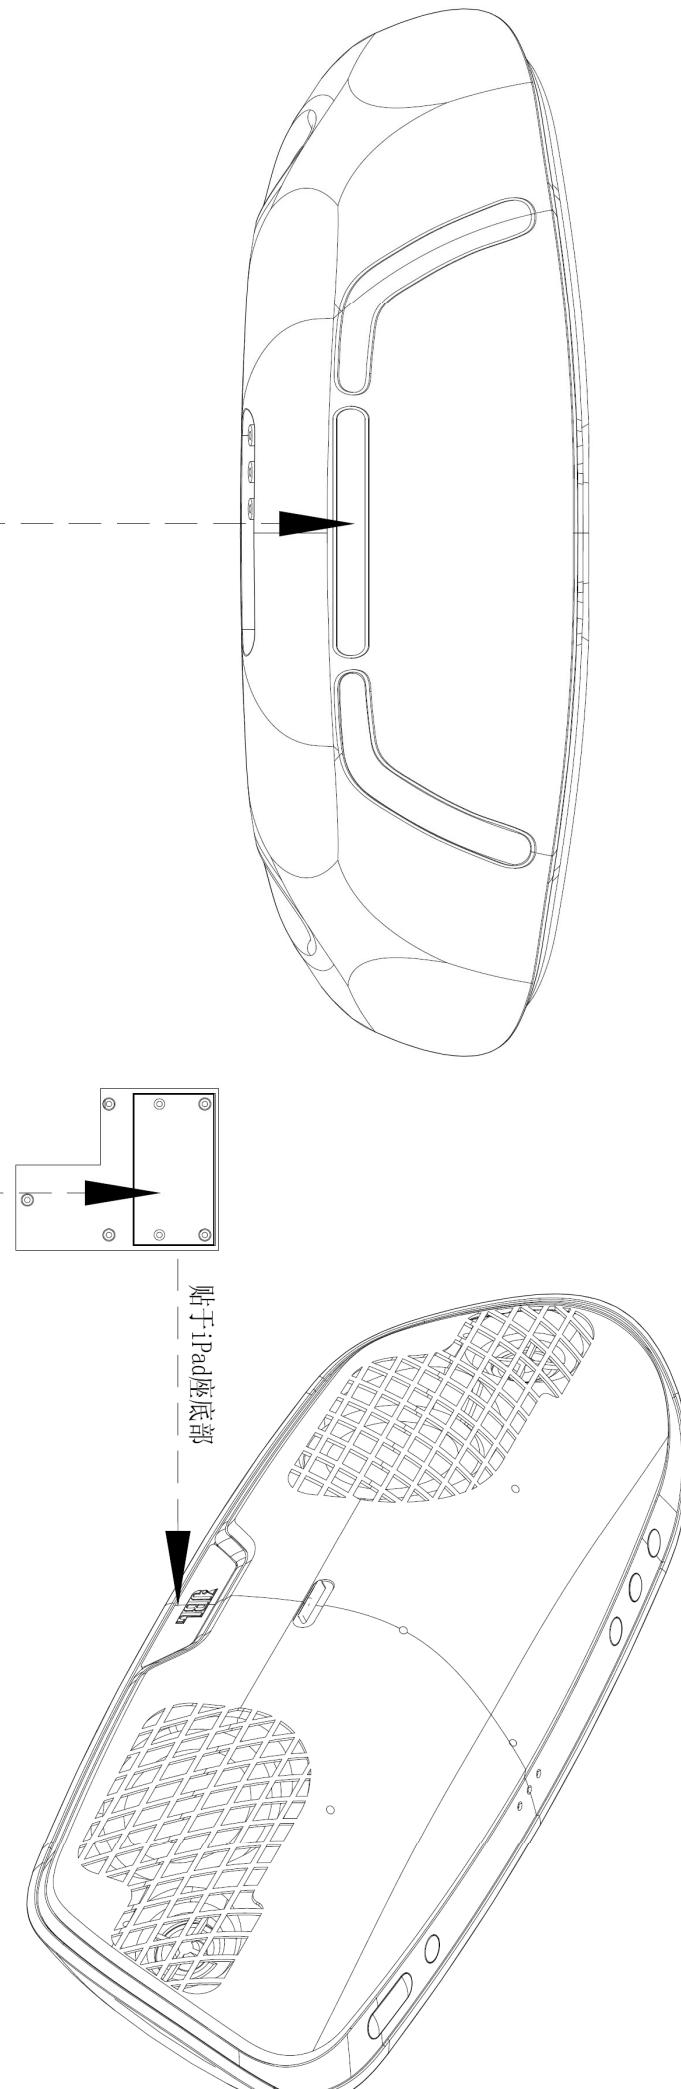

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
0.2, 99mm±0.05 3°9.8mm±0.07
10.29mm±0.1 30.99.9mm±0.15
100.29mm±0.2 30° ±0.3

SHINHINT GROUP

技术要求:
NOTE:
1. 熔融指数(塑胶件): g/10min (公差: ±*****) ;
MELTING INDEX(PLASTIC): g/10min (TOLERANCE: ±*****) ;
2. 出模角度(塑胶件):****;
DRAFT ANGLE(PLASTIC):****;
3. 表面缺陷(塑胶件):****;
TEXTURE(PLASTIC):****;
4. 不能接受的缺陷:刮花,缩水,变形,污点及类似的异常情形;
UNACCEPTABLE CONDITIONS: FLASH, SHRINKAGE, DEFORMATION, SPOTS, AND SIMILAR IMPERFECTION;
4. “*”标识表示重要尺寸,必须经QC检验;
“*”REPRESENT IMPORTANT DIMENSIONS, NEED TO BE CHECKED BY QC;
5. “□”口 相选尺寸或Statistical process control(SPC)过程控制尺寸,需要制造商通过统计来控制;
“□”REPRESENT SPC DIMENSIONS, NEED TO BE CONTROLLED BY PROVIDER;
6. 无害物质要求:禁用物质的含量必须符合《环保要求及标准》中的规定;
HAZARDOUS SUBSTANCE MANAGEMENT:CONTENT TO MEET REQUIREMENT OF "ENVIRONMENTAL REQUIREMENTS AND STANDARD";
7. 单位重量(kg):**** (公差: ±*****) 。
UNIT (KG):**** (TOLERANCE: ±*****) .

1. 熔融指数(塑胶件): g/10min (公差: ±*****) ;
MELTING INDEX(PLASTIC): g/10min (TOLERANCE: ±*****) ;
2. 出模角度(塑胶件):****;
DRAFT ANGLE(PLASTIC):****;
3. 表面缺陷(塑胶件):****;
TEXTURE(PLASTIC):****;
4. 不能接受的缺陷:刮花,缩水,变形,污点及类似的异常情形;
UNACCEPTABLE CONDITIONS: FLASH, SHRINKAGE, DEFORMATION, SPOTS, AND SIMILAR IMPERFECTION;
4. “*”标识表示重要尺寸,必须经QC检验;
“*”REPRESENT IMPORTANT DIMENSIONS, NEED TO BE CHECKED BY QC;
5. “□”口 相选尺寸或Statistical process control(SPC)过程控制尺寸,需要制造商通过统计来控制;
“□”REPRESENT SPC DIMENSIONS, NEED TO BE CONTROLLED BY PROVIDER;
6. 无害物质要求:禁用物质的含量必须符合《环保要求及标准》中的规定;
HAZARDOUS SUBSTANCE MANAGEMENT:CONTENT TO MEET REQUIREMENT OF "ENVIRONMENTAL REQUIREMENTS AND STANDARD";
7. 单位重量(kg):**** (公差: ±*****) 。
UNIT (KG):**** (TOLERANCE: ±*****) .