



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

**WIRELESS SPEAKER
Model: HARMAN KARDON ONYX**

Brand: Harman/Kardon

Test Report Number:

C130503Z01-RP1

Prepared for

**Harman International Industries, Inc
8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China**

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: June 3, 2013



TESTING CERT #2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C130503Z01-RP1	Initial Issue	ALL	Anna Liu



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION4

2. EUT DESCRIPTION.....5

3. TEST METHODOLOGY.....6

 3.1 DESCRIPTION OF TEST MODES.....6

4. FACILITIES AND ACCREDITATIONS7

 4.1 FACILITIES.....7

 4.2 ACCREDITATIONS7

 4.3 MEASUREMENT UNCERTAINTY7

5. SETUP OF EQUIPMENT UNDER TEST8

 5.1 SETUP CONFIGURATION OF EUT8

 5.2 SUPPORT EQUIPMENT8

6. FCC PART 15.247 REQUIREMENTS9

 6.1 20dB BANDWIDTH.....9

 6.2 PEAK POWER.....14

 6.3 PEAK POWER SPECTRAL DENSITY15

 6.4 BAND EDGES MEASUREMENT17

 6.5 FREQUENCY SEPARATION27

 6.6 NUMBER OF HOPPING FREQUENCY30

 6.7 TIME OF OCCUPANCY (DWELL TIME).....33

 6.8 SPURIOUS EMISSIONS.....40

 6.9 POWERLINE CONDUCTED EMISSIONS60



1. TEST RESULT CERTIFICATION

Product:	WIRELESS SPEAKER
Model:	HARMAN KARDON ONYX
Brand:	Harman/Kardon
Tested:	May 3~30, 2013
Applicant:	Harman International Industries, Inc 8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES
Manufacturer:	Harman International Industries, Inc 8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2. EUT DESCRIPTION

Product	WIRELESS SPEAKER
Model Number	HARMAN KARDON ONYX
Brand	Harman/Kardon
Model Discrepancy	N/A
Identify Number	C130503Z01-RP1
Power Supply	DC19V Supplied by the Adapter or DC11.1V Supplied by the Battery
Adapter Model No.	DT19V-3C-DC AC input: 100-240V, 50/60Hz, 1.5A Max. DC output: DC19V, 3.0A AC input cable: Unshielded, 1.0m DC output cable: Shielded, 1.5m
Received Date	March 3, 2013
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK : 5.80dBm 8DPSK : 4.33dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	Extern Antenna with 3.0dBi gain (Max)

Note: This submittal(s) (test report) is intended for FCC ID: APIONYXTC filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Wireless Link Play + Charging	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

Above 1G, Channel Low (2402MHz) · Mid (2441MHz) and High (2480MHz) were chosen for full testing for GFSK and 8DPSK.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
Band Edges	+/-0.182 dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	NOTEBOOK	992F2VG	6297043	N/A	IBM	N/A	Unshielded 2.50m
2.	Wireless Route	TL-WR740N	12714462932	N/A	Tp-Link	N/A	Unshielded 2.50m

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20dB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

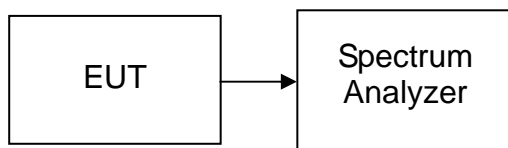

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS

No non-compliance noted




Test plot (GFSK)

20dB Bandwidth(CH Low)

Agilent

R T

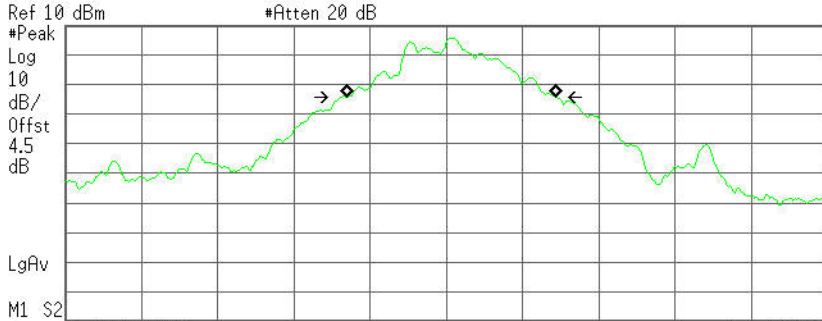

Center 2.402 000 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)

Occupied Bandwidth
 822.4582 kHz


Occ BW % Pwr 99.00 %
 x dB -20.00 dB

Transmit Freq Error 20.296 kHz
 x dB Bandwidth 845.034 kHz

20dB Bandwidth (CH Mid)

Agilent

R T

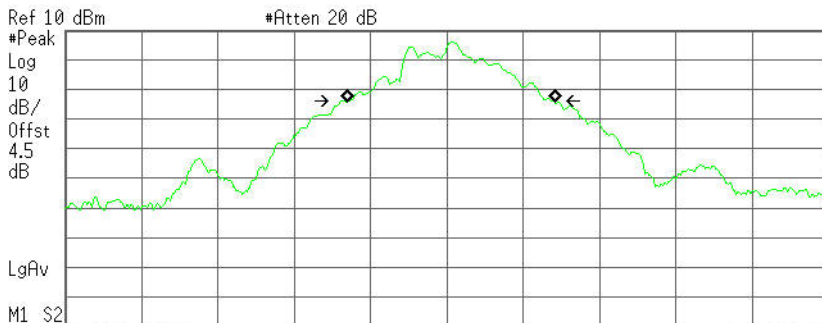

Center 2.441 000 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)

Occupied Bandwidth
 813.7934 kHz

Occ BW % Pwr 99.00 %
 x dB -20.00 dB


Transmit Freq Error 16.312 kHz
 x dB Bandwidth 835.913 kHz



20dB Bandwidth (CH High)

Agilent

R T

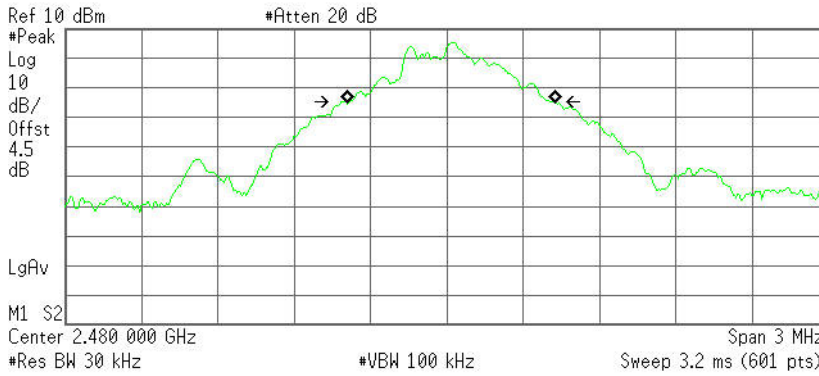

Occupied Bandwidth

816.9555 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error 16.734 kHz
x dB Bandwidth 831.701 kHz




Test plot (8DPSK)

20dB Bandwidth (CH Low)

Agilent

R T

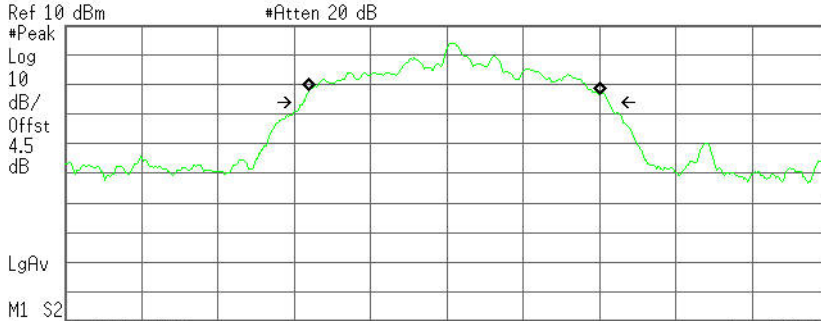

Ref 10 dBm #Atten 20 dB
 #Peak Log 10 dB/ Offst 4.5 dB
 M1 S2 Center 2.402 000 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)

Occupied Bandwidth
 1.1452 MHz


Occ BW % Pwr 99.00 %
 x dB -20.00 dB

Transmit Freq Error 34.002 kHz
 x dB Bandwidth 1.199 MHz

20dB Bandwidth (CH Mid)

Agilent

R T

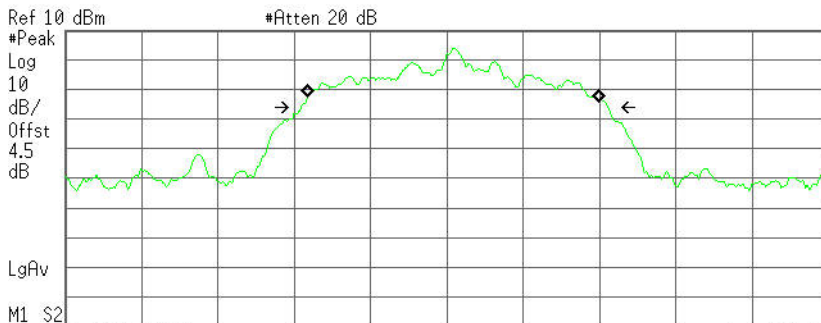

Ref 10 dBm #Atten 20 dB
 #Peak Log 10 dB/ Offst 4.5 dB
 M1 S2 Center 2.441 000 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)

Occupied Bandwidth
 1.1437 MHz

Occ BW % Pwr 99.00 %
 x dB -20.00 dB


Transmit Freq Error 27.644 kHz
 x dB Bandwidth 1.210 MHz



20dB Bandwidth (CH High)

Agilent

R T

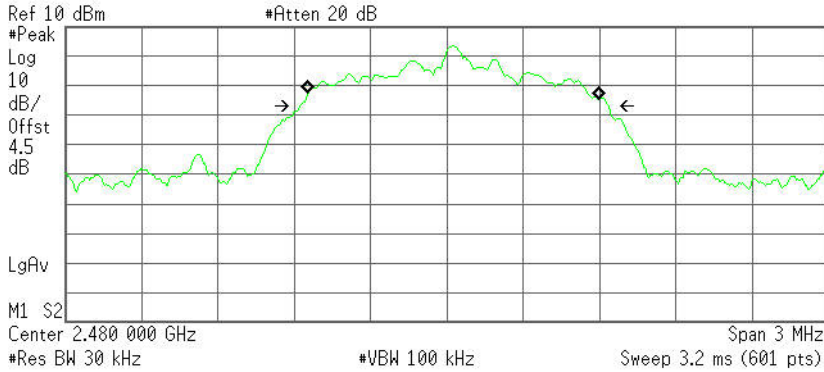

Occupied Bandwidth

1.1390 MHz

Occ BW % Pwr	99.00 %
x dB	-20.00 dB

Transmit Freq Error	26.789 kHz
x dB Bandwidth	1.208 MHz



6.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	03/09/2013	03/08/2014
Power Sensor	Anritsu	MA2411B	1126150	03/09/2013	03/08/2014
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

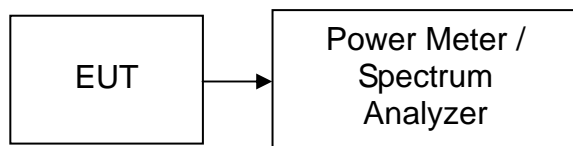

TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	2.13	3.50	5.63	0.00366	1	PASS
Mid	2441	2.30	3.50	5.80	0.00380		PASS
High	2480	1.54	3.50	5.04	0.00319		PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	0.80	3.50	4.30	0.00269	1	PASS
Mid	2441	0.83	3.50	4.33	0.00271		PASS
High	2480	0.05	3.50	3.55	0.00226		PASS



6.3 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

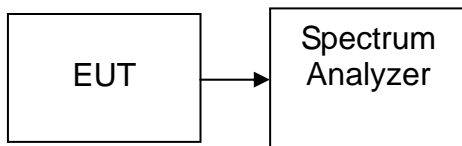

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014	
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014	
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014	
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014	
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2012	06/21/2013	
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014	
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014	
Loop Antenna	A, R, A	PLA-1030/B	1029	03/23/2013	03/23/2014	
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R	
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R	
Controller	CT	N/A	N/A	N.C.R	N.C.R	
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014	
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R	
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2				

Test Configuration

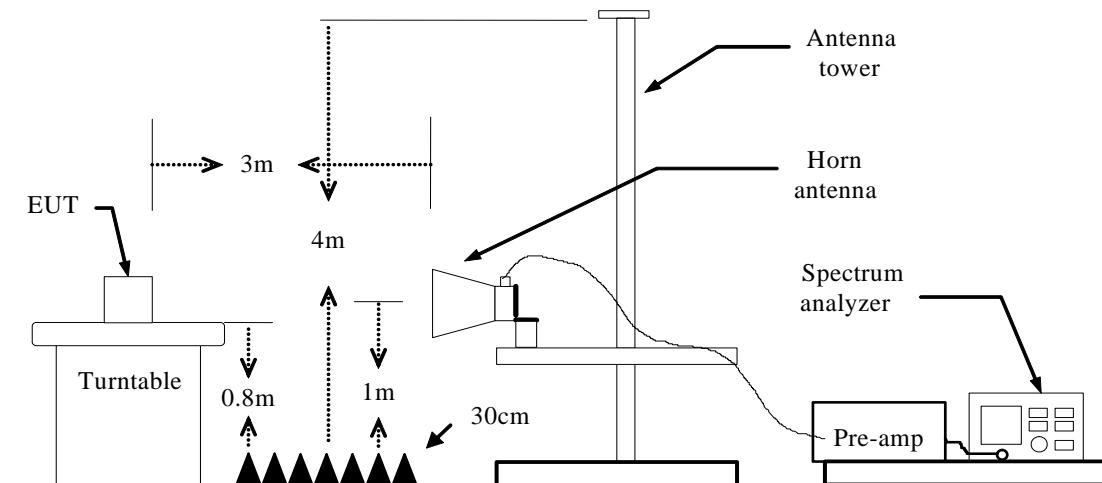



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=510Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Data (GFSK)


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

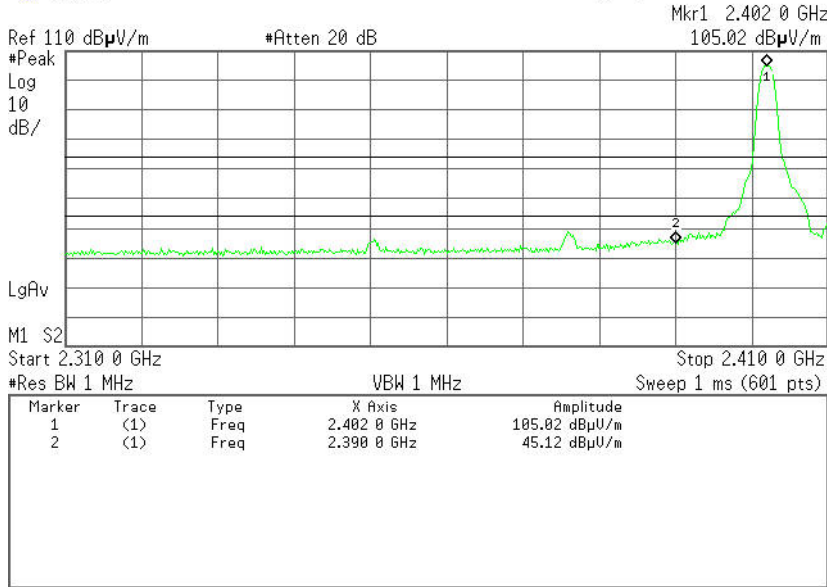


Detector mode: Average

Polarity: Vertical

Agilent

R T

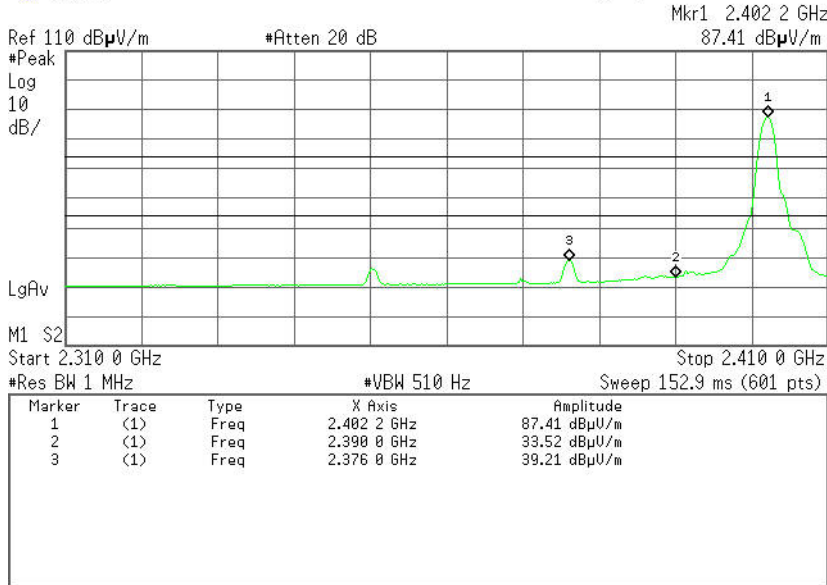




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

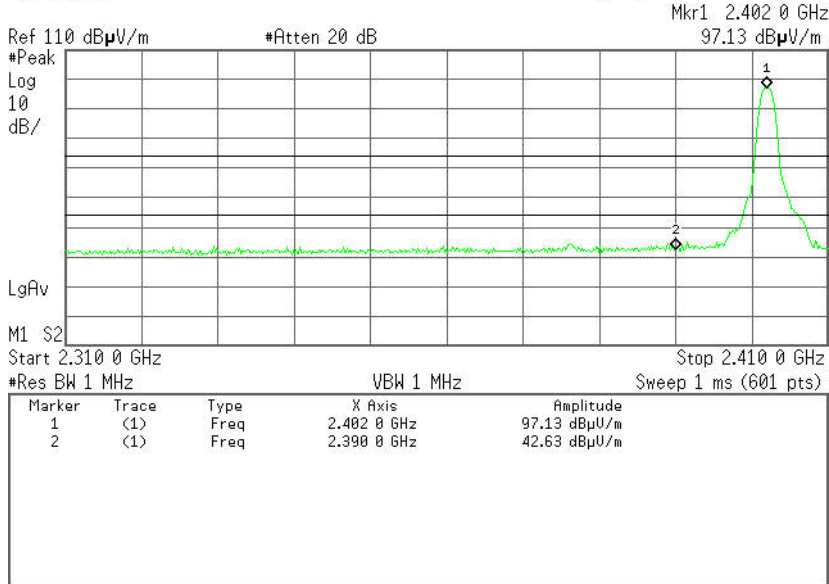


Detector mode: Average

Polarity: Horizontal

Agilent

R T

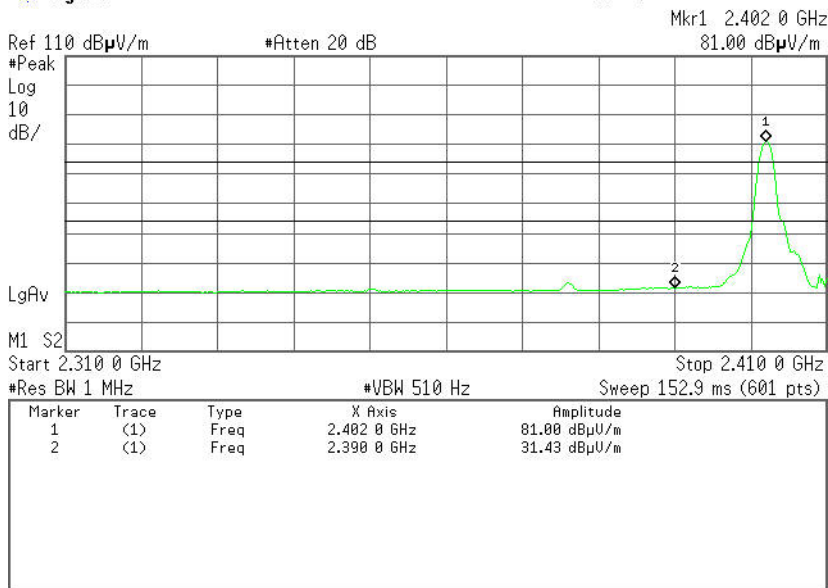



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 2.479 92 GHz
103.59 dBμV/m

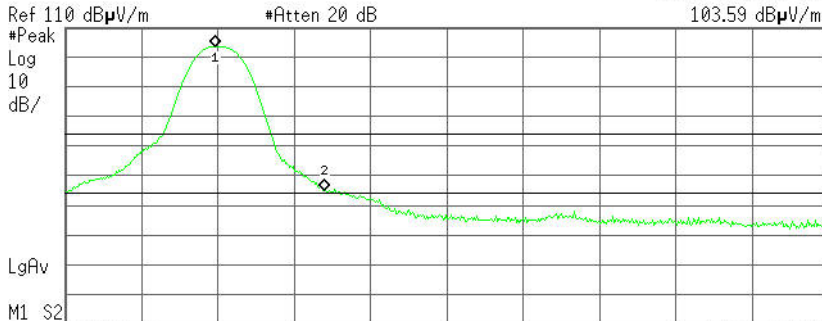

Start 2.475 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz VBW 1 MHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 92 GHz	103.59 dBμU/m
2	(1)	Freq	2.483 50 GHz	55.19 dBμU/m


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 2.479 83 GHz
87.76 dBμV/m

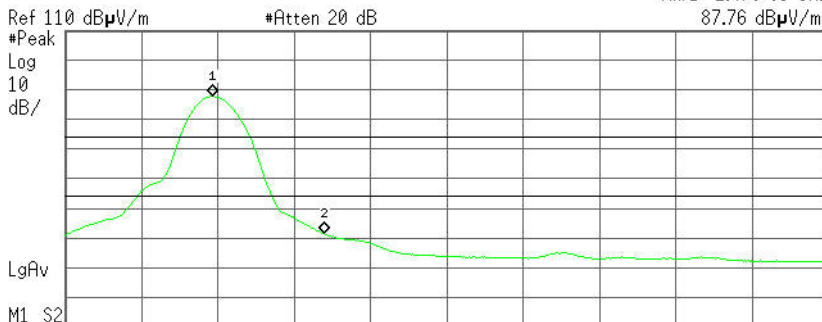

Start 2.475 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 510 Hz Sweep 38.24 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 83 GHz	87.76 dBμU/m
2	(1)	Freq	2.483 50 GHz	41.42 dBμU/m



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.480 04 GHz
95.67 dBµV/m



Start 2.475 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz VBW 1 MHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 04 GHz	95.67 dBµV/m
2	(1)	Freq	2.483 50 GHz	46.87 dBµV/m

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.479 88 GHz
80.63 dBµV/m



Start 2.475 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 510 Hz Sweep 38.24 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 88 GHz	80.63 dBµV/m
2	(1)	Freq	2.483 50 GHz	35.87 dBµV/m



Test Data (8DPSK)


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

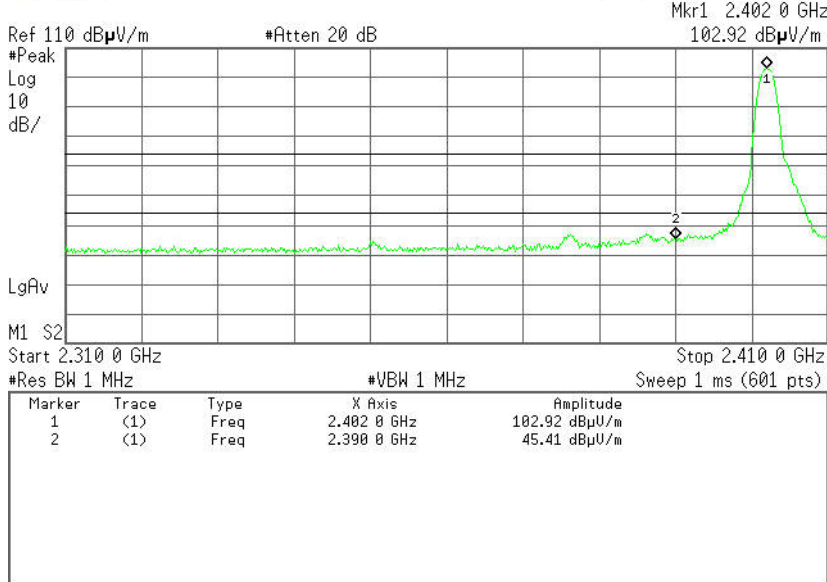


Detector mode: Average

Polarity: Vertical

Agilent

R T

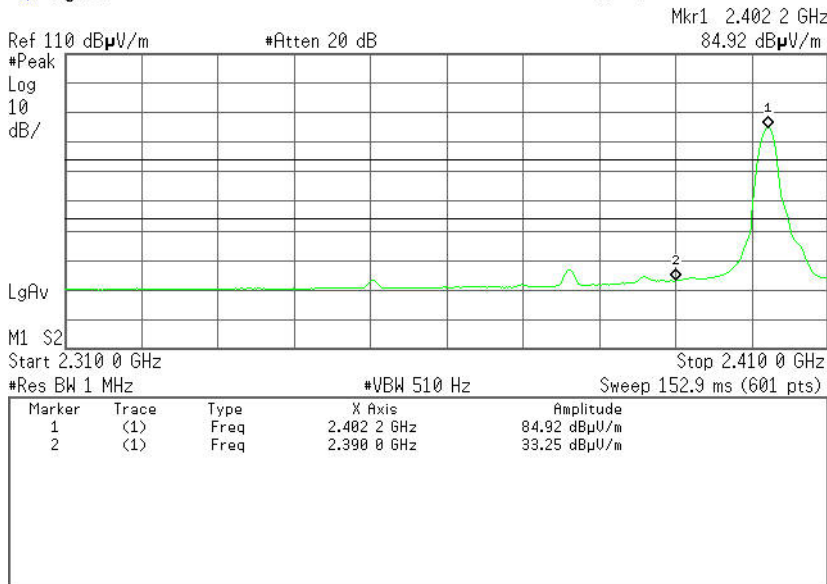




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

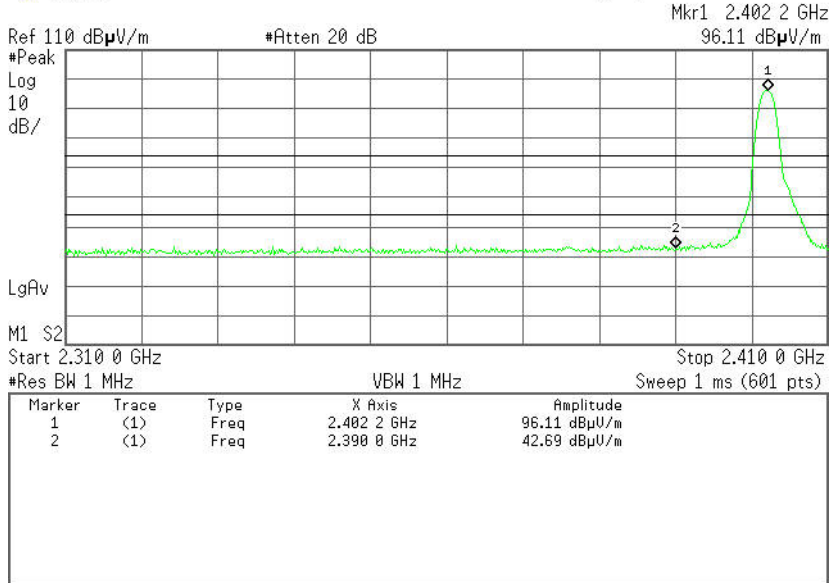


Detector mode: Average

Polarity: Horizontal

Agilent

R T

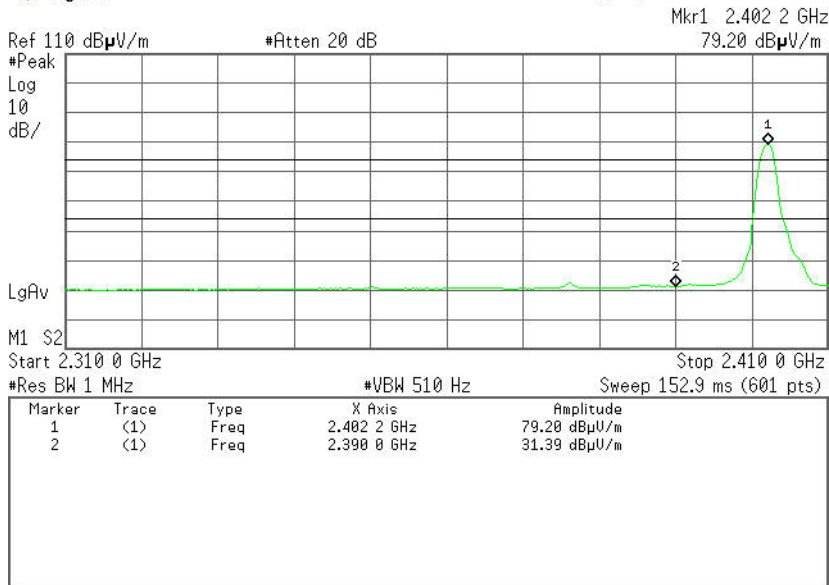




Band Edges (CH-High)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

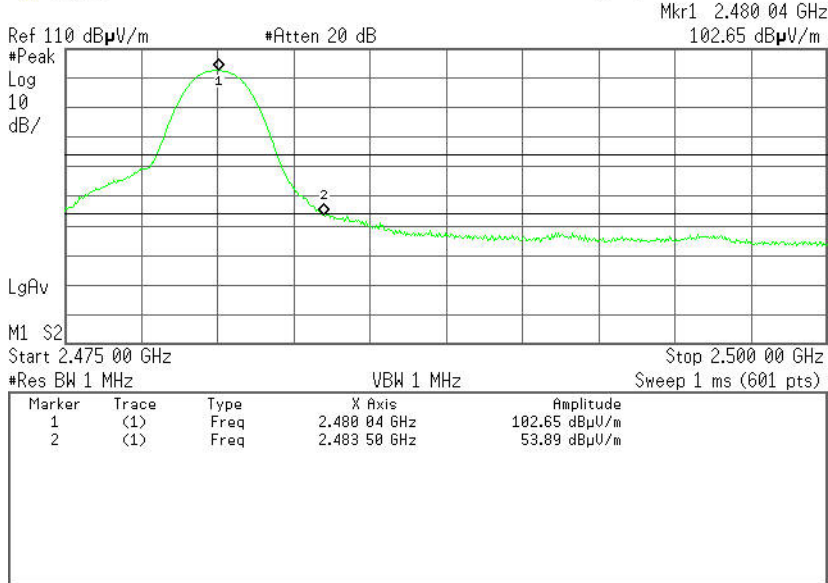


Detector mode: Average

Polarity: Vertical

Agilent

R T

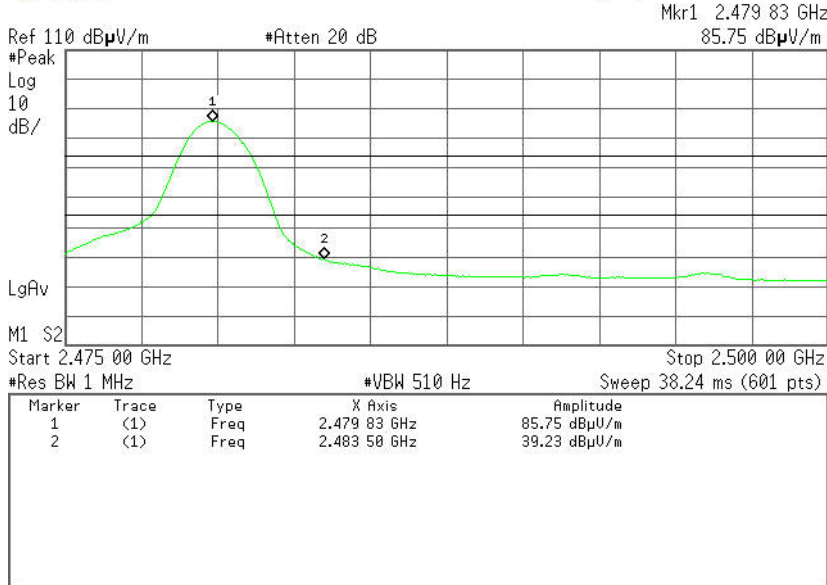




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.480 00 GHz
95.06 dBµV/m

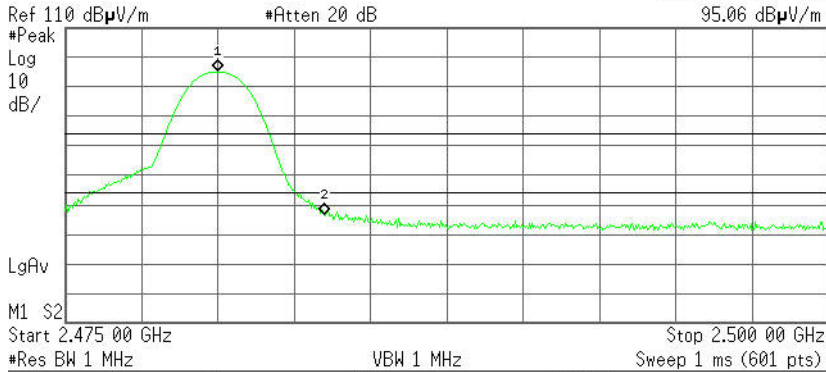

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	95.06 dBµV/m
2	(1)	Freq	2.483 50 GHz	46.71 dBµV/m

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.479 88 GHz
79.18 dBµV/m



Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 88 GHz	79.18 dBµV/m
2	(1)	Freq	2.483 50 GHz	34.67 dBµV/m



6.5 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

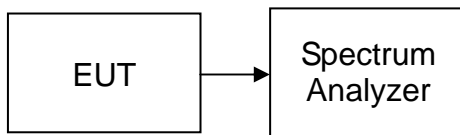

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	563.356	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	806.667	> Two-thirds of the 20 dB Bandwidth	Pass




GFSK

Test Plot

Measurement of Channel Separation

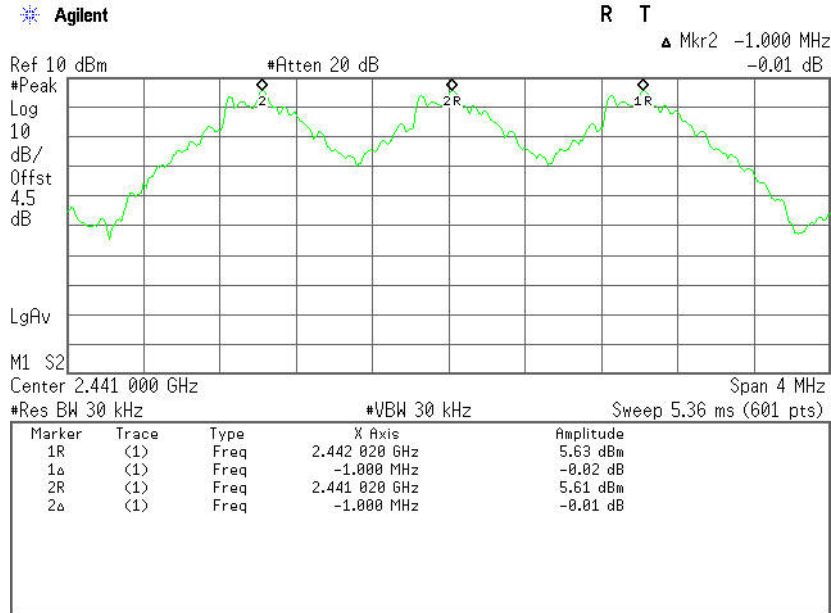

20 dB bandwidth(CH Low)

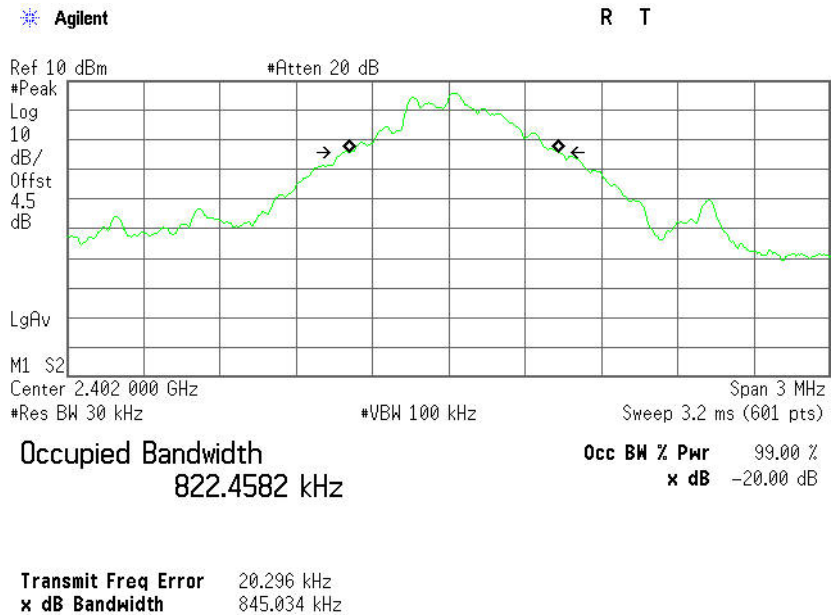





8DPSK

Test Plot

Measurement of Channel Separation

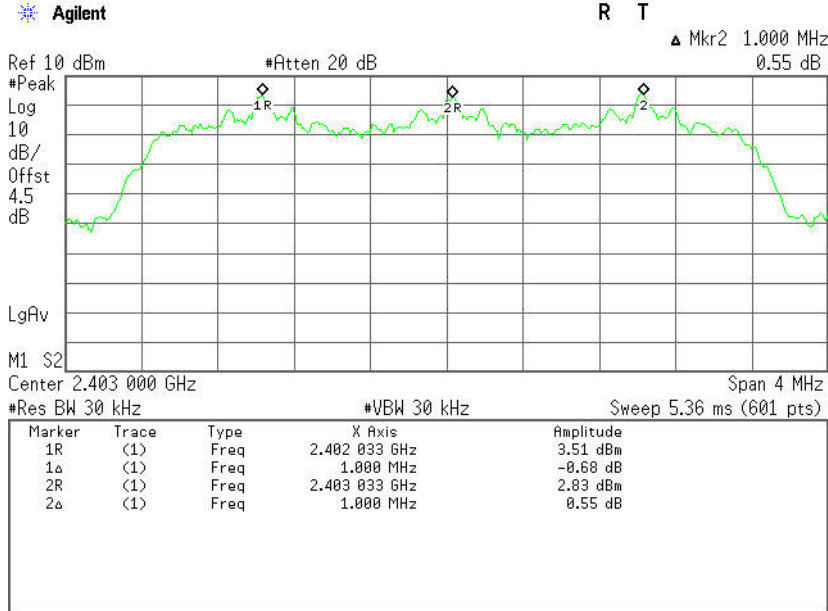

20 dB bandwidth(CH Mid)

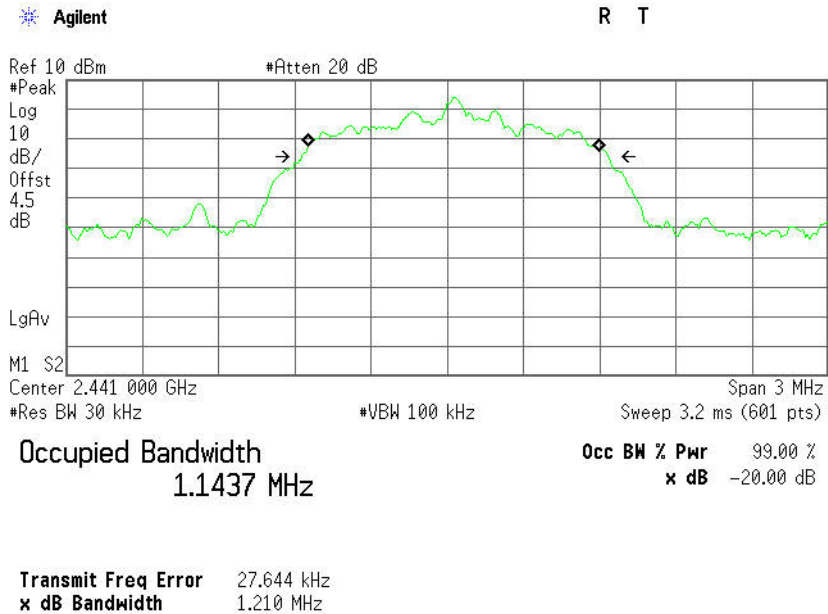



6.6 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

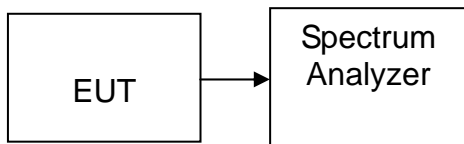

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data


Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot (GFSK)

Channel Number

2.400 GHz – 2.4415 GHz

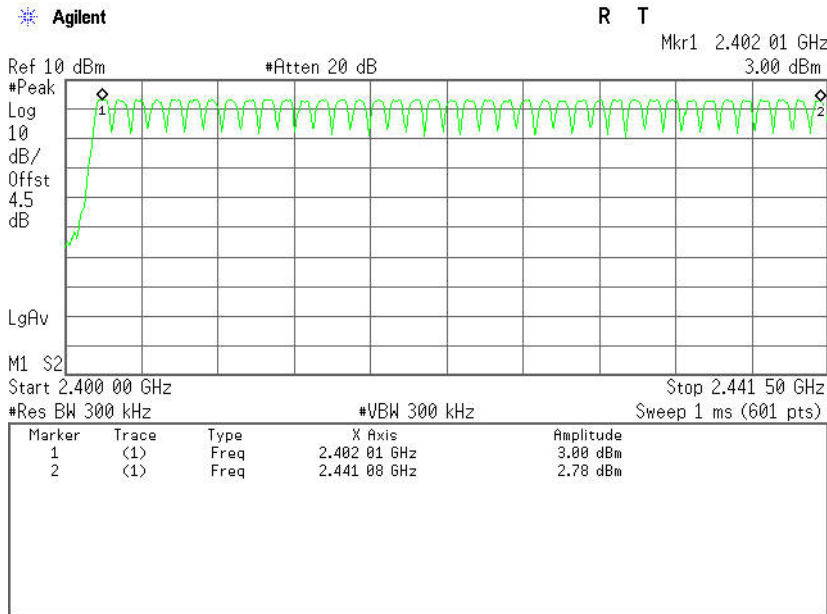

2.4415 GHz –2.4835 GHz

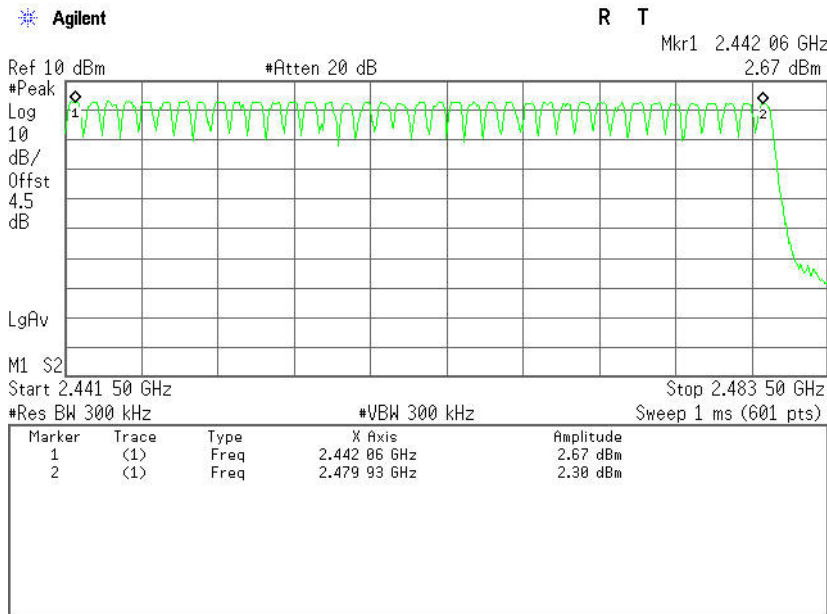





Test Plot (8DPSK)

Channel Number

2.400 GHz – 2.4415 GHz

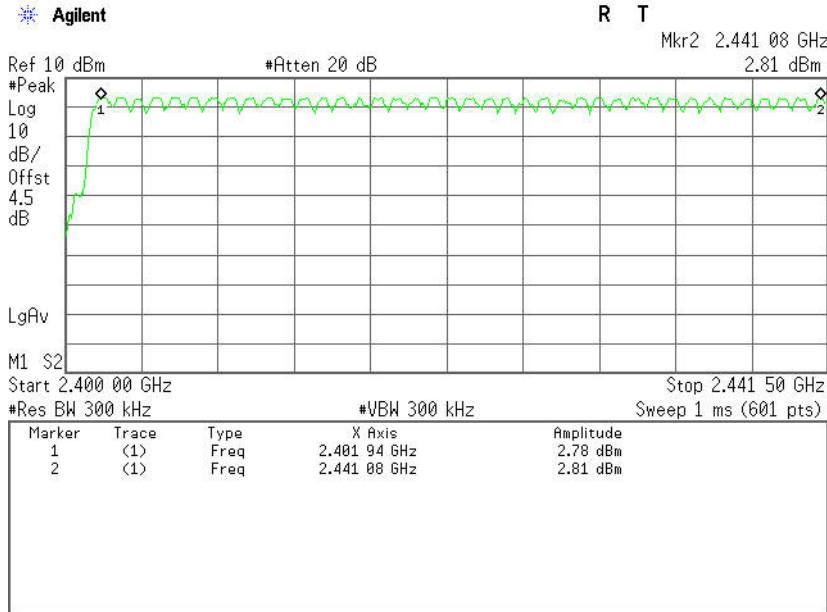

2.4415 GHz –2.4835 GHz

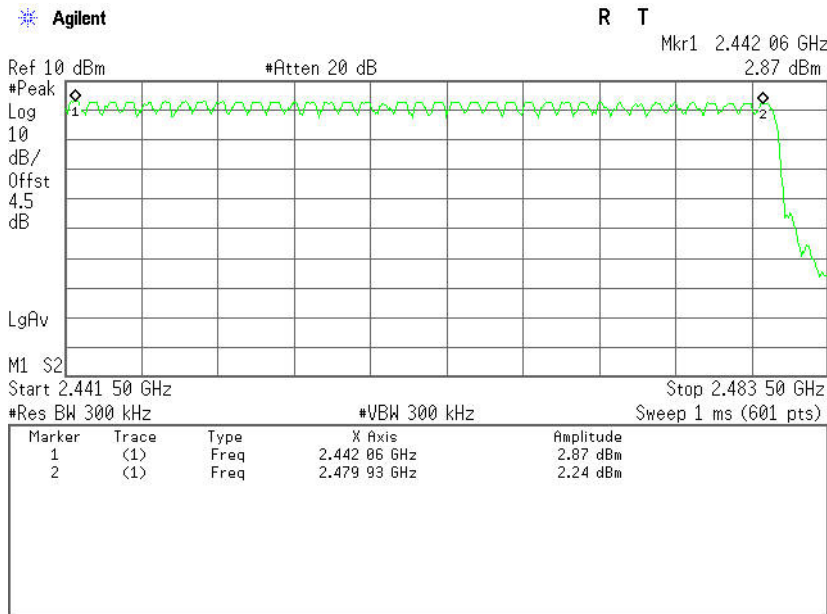



6.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

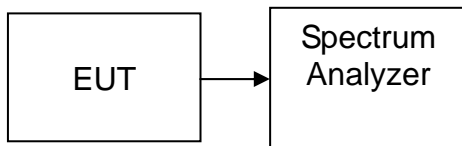

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Mid: $0.513 * (1600/2)/79 * 31.6 = 164.160(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.513	164.160	31.60	400.00	PASS

DH 3

CH Mid: $1.765 * (1600/4)/79 * 31.6 = 282.400 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.765	282.400	31.60	400.00	PASS

DH 5

CH Mid: $3.008 * (1600/6)/79 * 31.6 = 320.853(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.008	320.853	31.60	400.00	PASS



Test Data

8DPSK

DH 1

CH Mid: $0.525 * (1600/2)/79 * 31.6 = 168.000$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.525	168.000	31.60	400.00	PASS

DH 3

CH Mid: $1.775 * (1600/4)/79 * 31.6 = 284.000$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.775	284.000	31.60	400.00	PASS

DH 5

CH Mid: $3.025 * (1600/6)/79 * 31.6 = 322.667$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.025	322.667	31.60	400.00	PASS




Test Plot

GFSK


DH 1

(CH Mid)

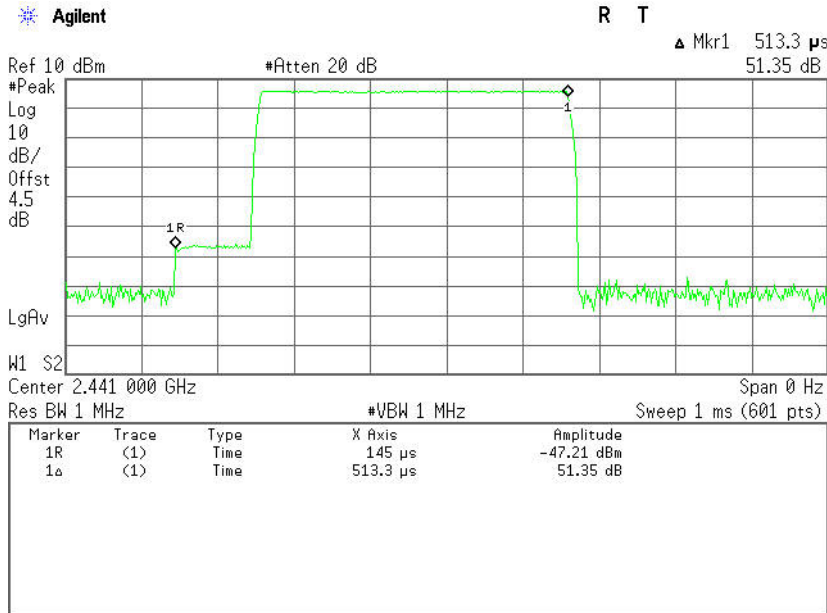

DH 3


(CH Mid)

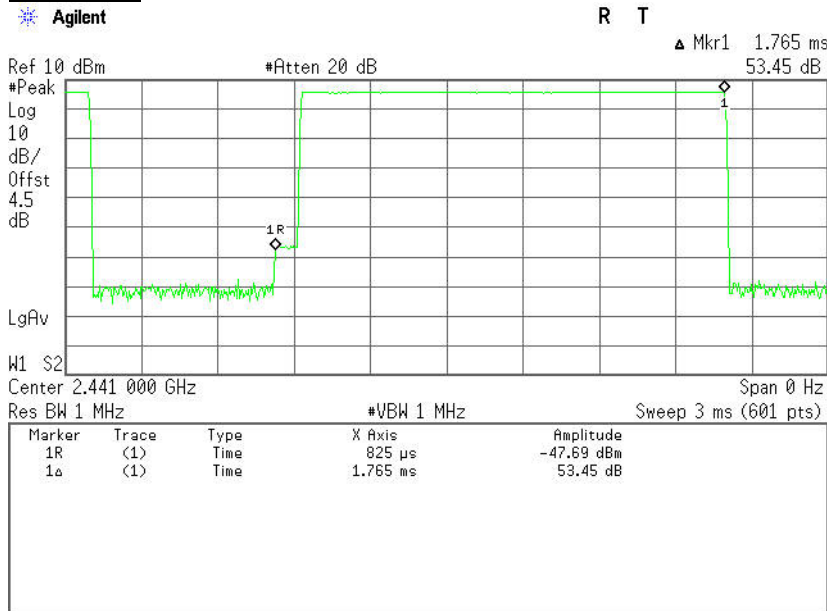



DH 5

(CH Mid)

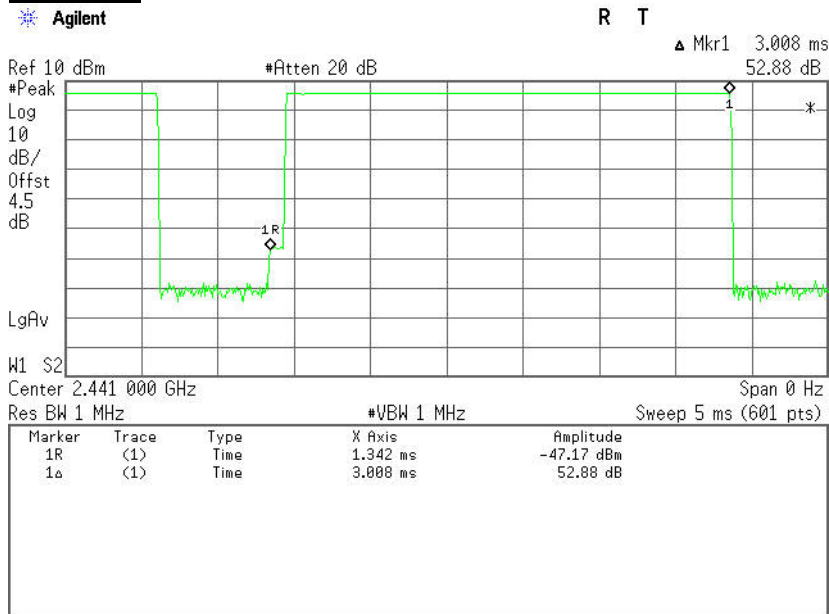




Test Plot
8DPSK

DH 1

(CH Mid)


Agilent

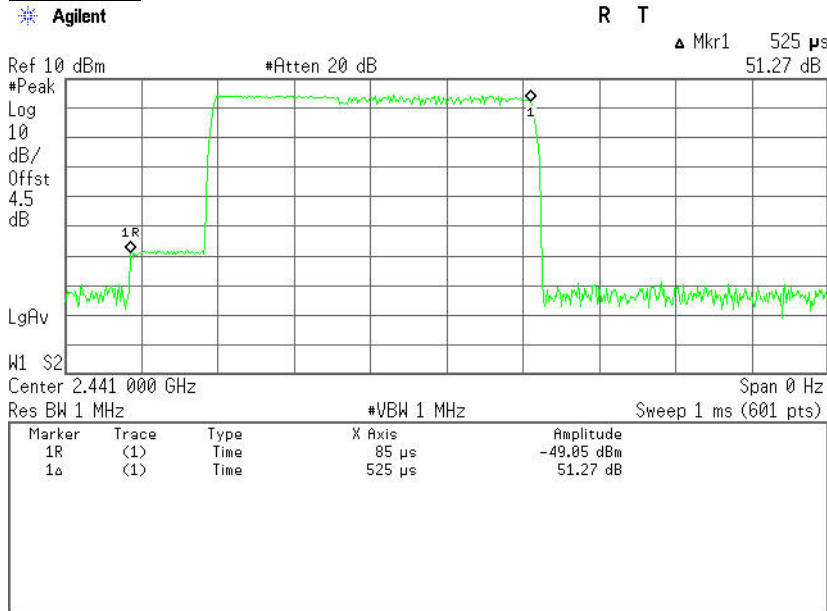

DH 3

(CH Mid)


Agilent

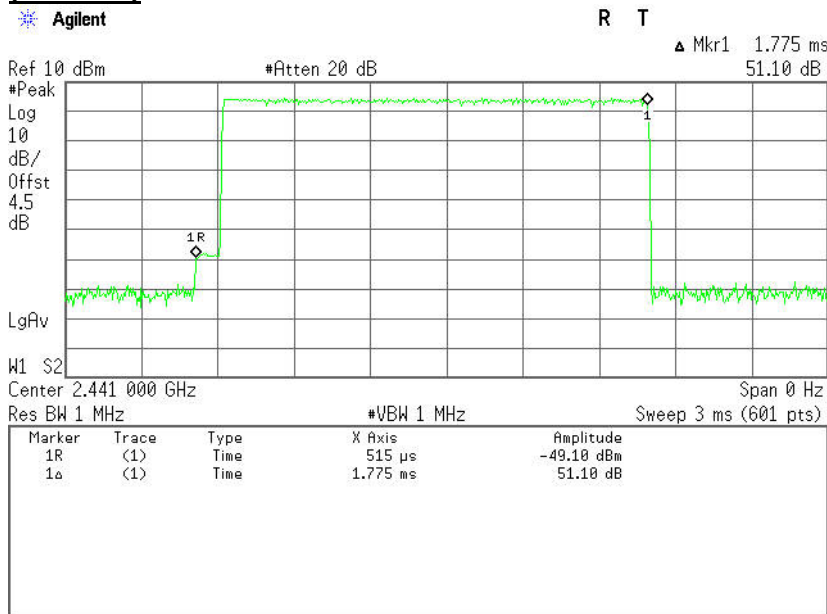



DH 5

(CH Mid)

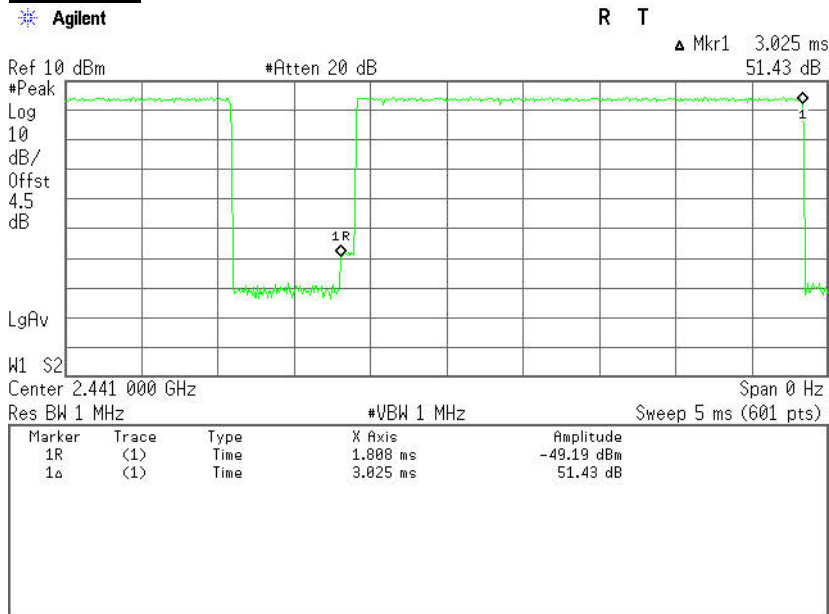



6.8 SPURIOUS EMISSIONS

6.8.1. Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

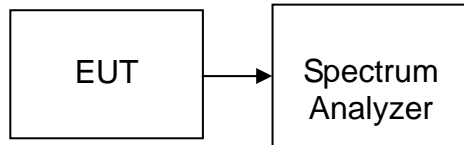

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted




Test Plot (GFSK)

CH Low (30MHz ~2.9GHz)

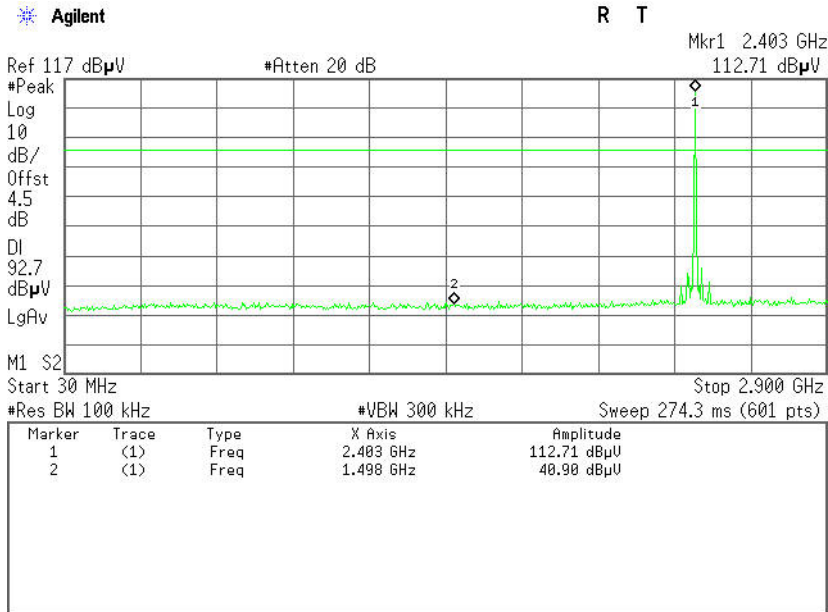


CH Low (2.31GHz ~2.41GHz)

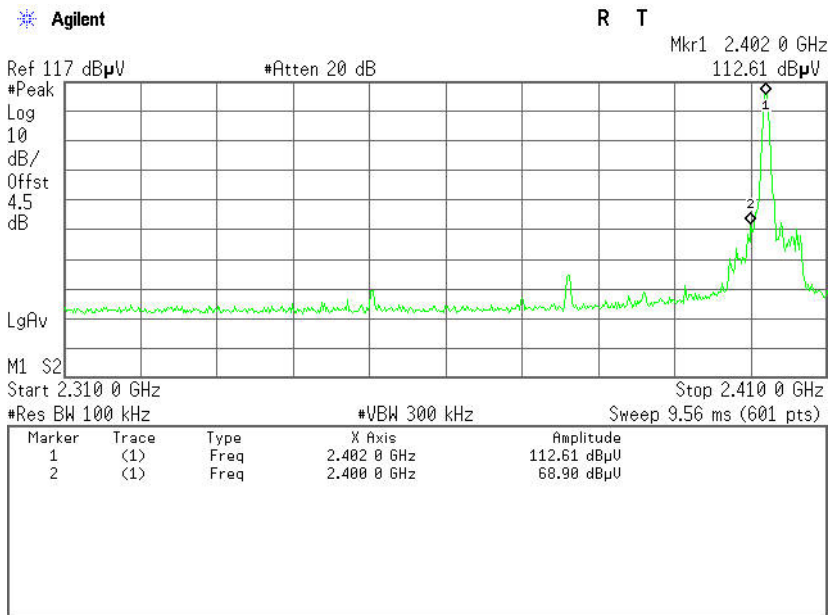




CH Low (2.9GHz ~26.5GHz)

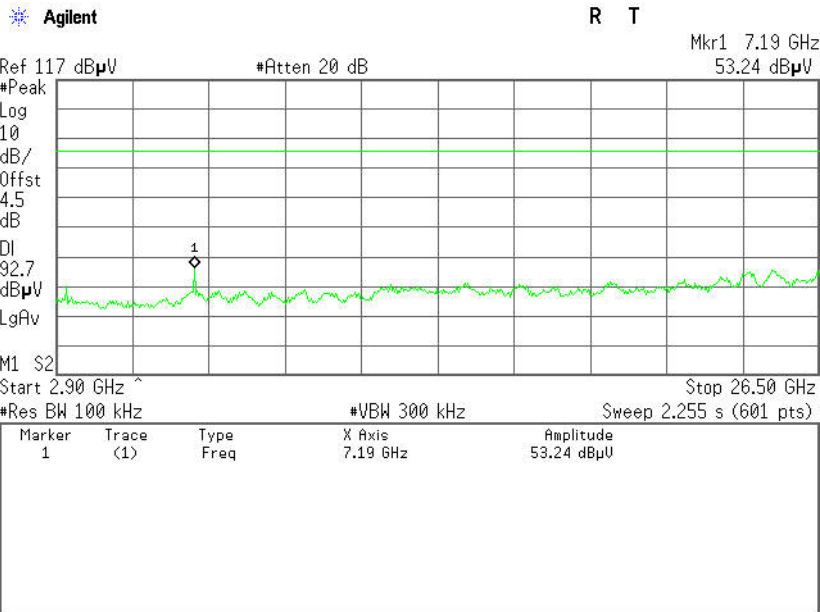

CH Mid (30MHz ~2.9GHz)

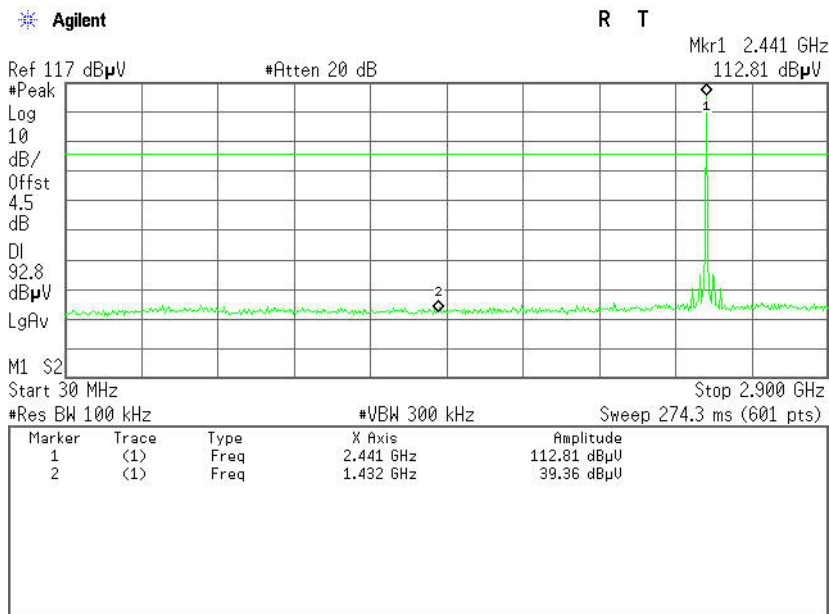




CH Mid (2.9GHz ~26.5GHz)

Agilent


R T

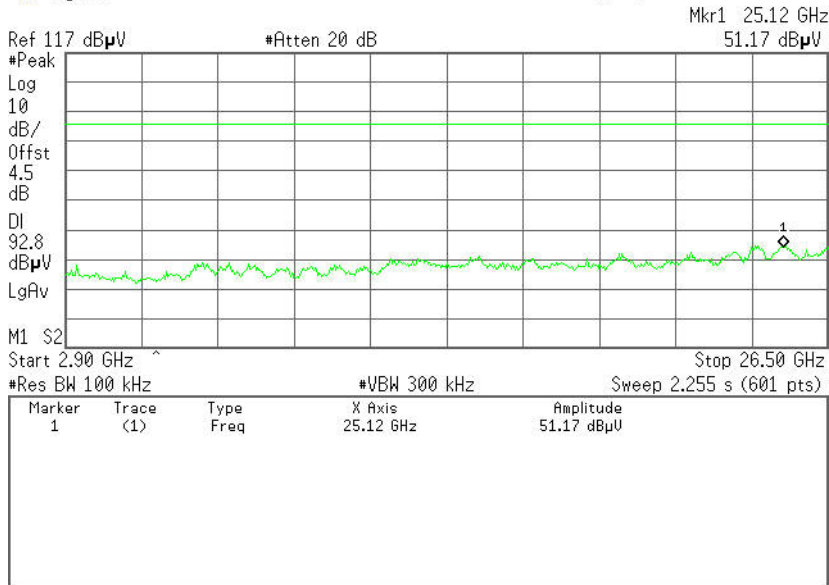

CH High (30MHz ~2.9GHz)

Agilent

R T

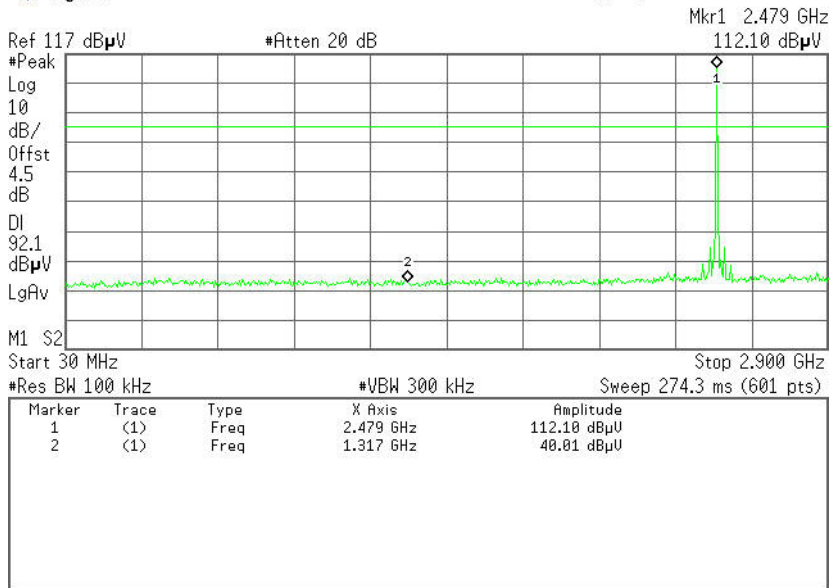




CH High (2.475GHz ~2.5GHz)

Agilent

R T

Mkr2 2.483 50 GHz
55.47 dBμV

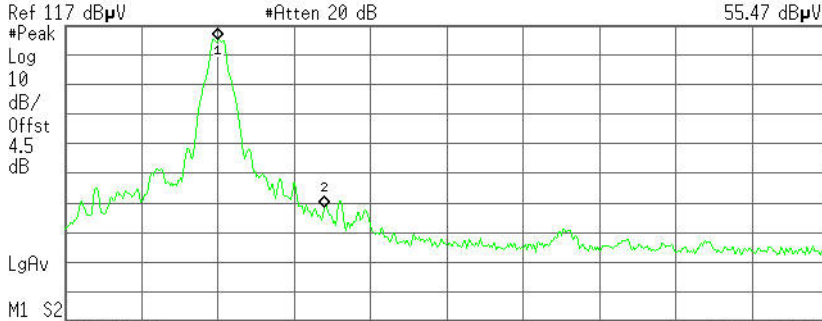

Start 2.475 00 GHz Stop 2.500 00 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.4 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	112.11 dBμU
2	(1)	Freq	2.483 50 GHz	55.47 dBμU

CH High(2.9GHz ~26.5GHz)

Agilent

R T

Mkr1 24.34 GHz
51.73 dBμV

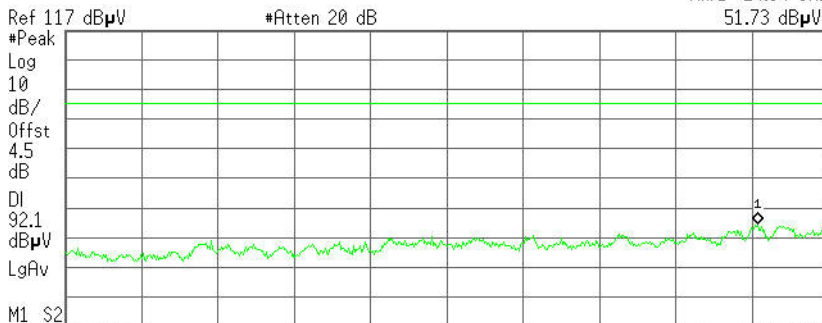


Start 2.90 GHz Stop 26.50 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.255 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.34 GHz	51.73 dBμU




Test Plot (8DPSK)

CH Low (30MHz ~2.9GHz)

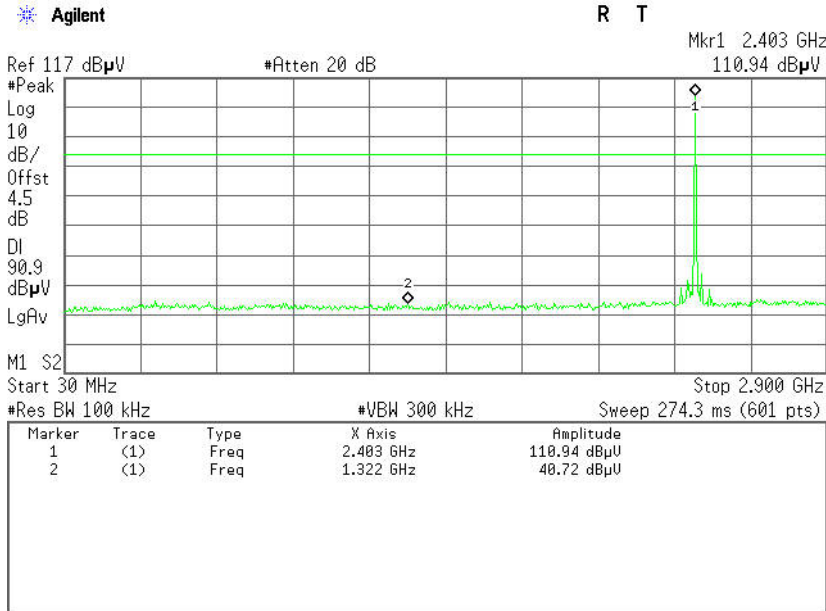

CH Low (2.31GHz ~2.41GHz)

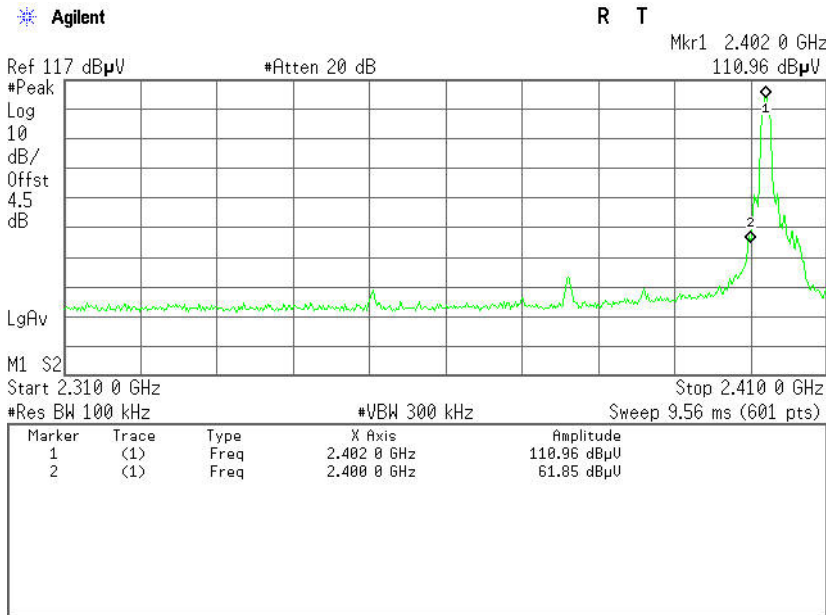




CH Low (2.9GHz ~26.5GHz)

Agilent


R T

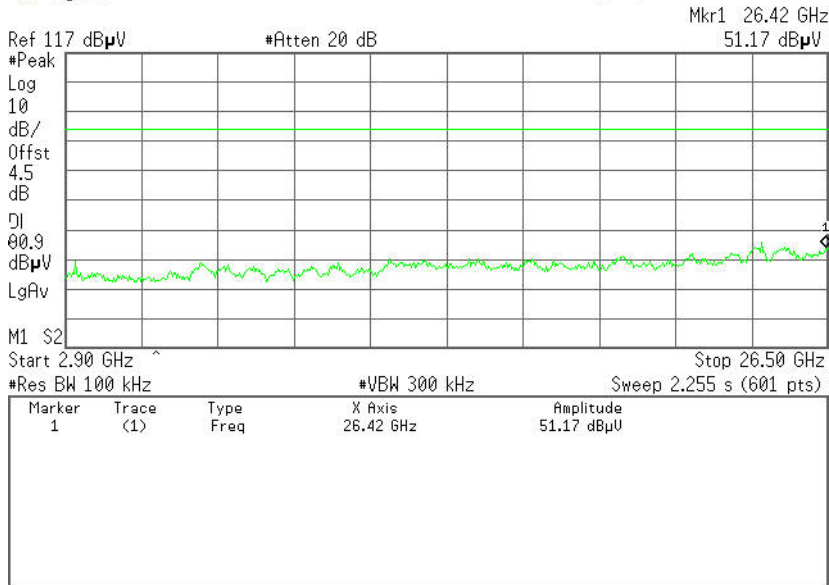

CH Mid (30MHz ~2.9GHz)

Agilent

R T

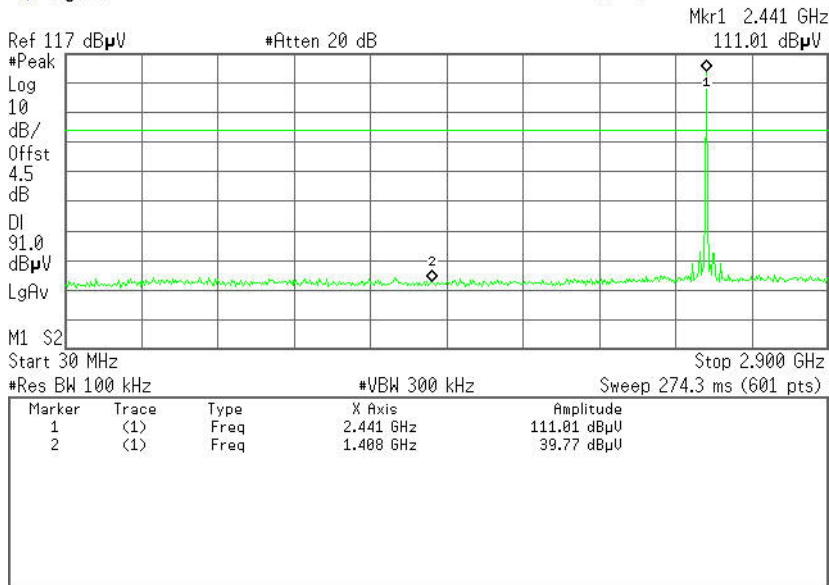




CH Mid (2.9GHz ~26.5GHz)

Agilent


R T

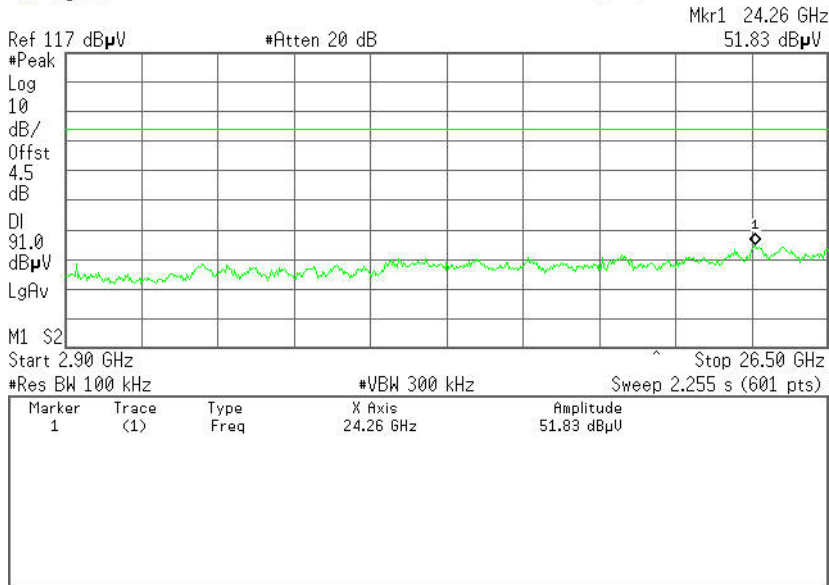

CH High (30MHz ~2.9GHz)

Agilent

R T

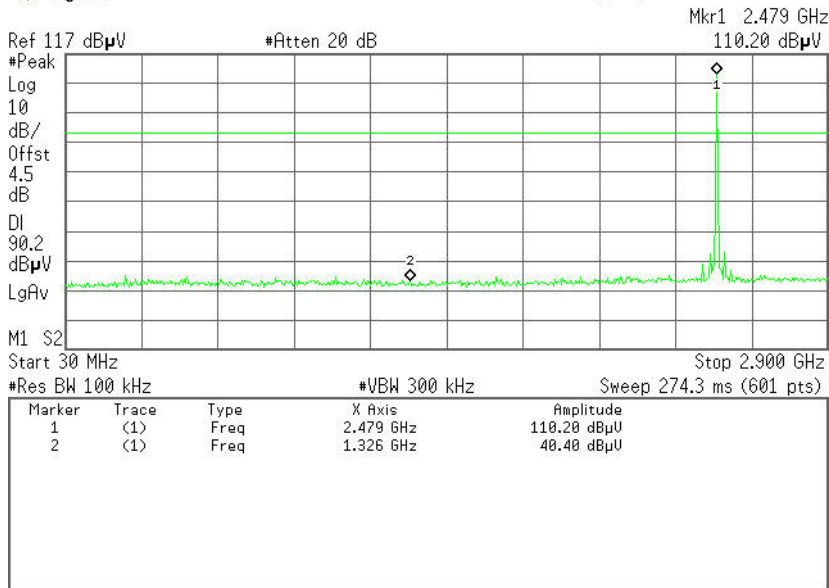




CH High (2.475GHz ~2.5GHz)

Agilent

R T

Mkr1 2.480 04 GHz
110.17 dBµV

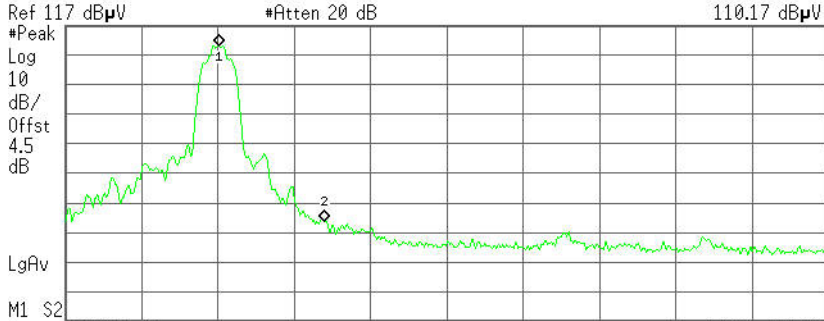

Start 2.475 00 GHz Stop 2.500 00 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.4 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 04 GHz	110.17 dBµV
2	(1)	Freq	2.483 50 GHz	50.92 dBµV

CH High(2.9GHz ~26.5GHz)

Agilent

R T

Mkr1 24.30 GHz
51.75 dBµV

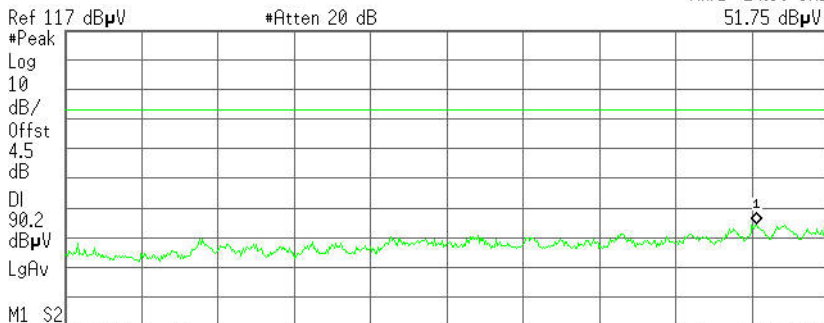

Start 2.90 GHz Stop 26.50 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.255 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.30 GHz	51.75 dBµV



6.8.2. Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54



MEASUREMENT EQUIPMENT USED


Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2012	06/21/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A、 R、 A	PLA-1030/B	1029	03/23/2013	03/23/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.




Test Configuration

Below 30MHz

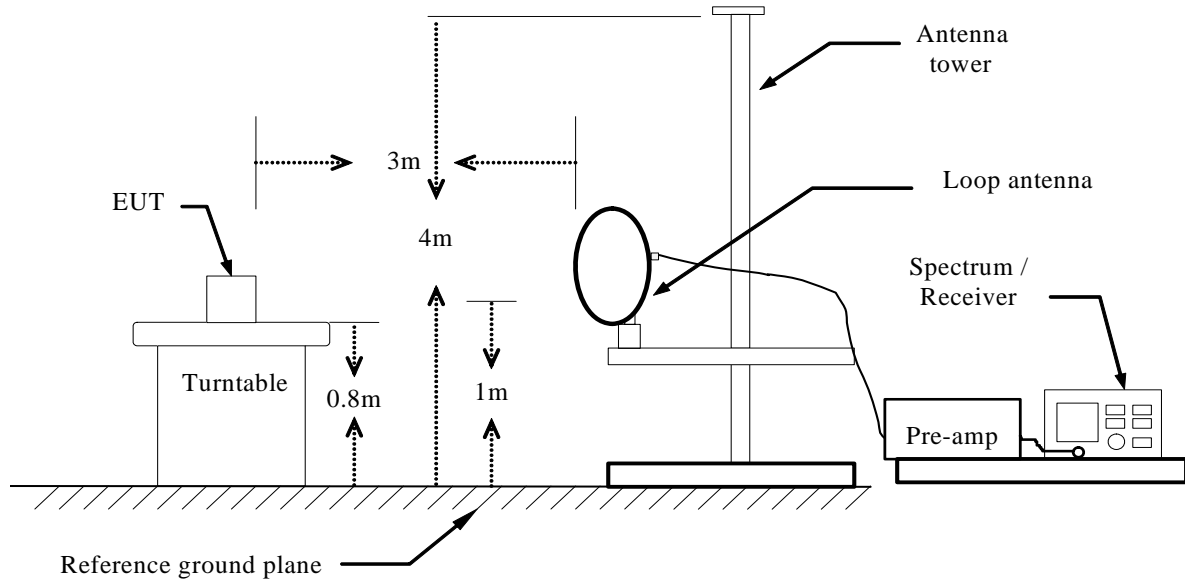


Below 1 GHz

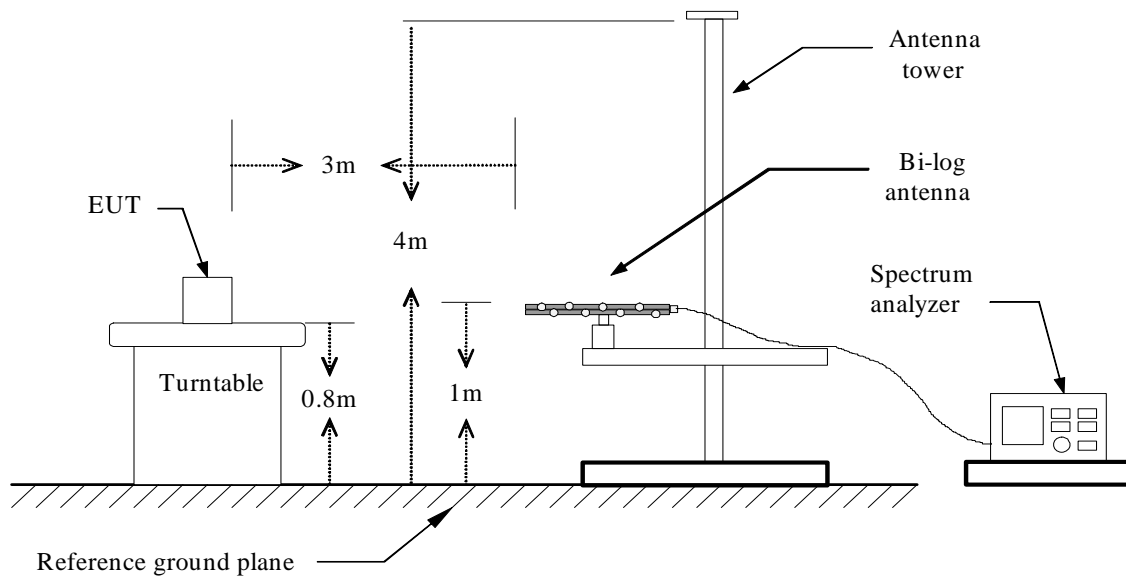



Above 1 GHz

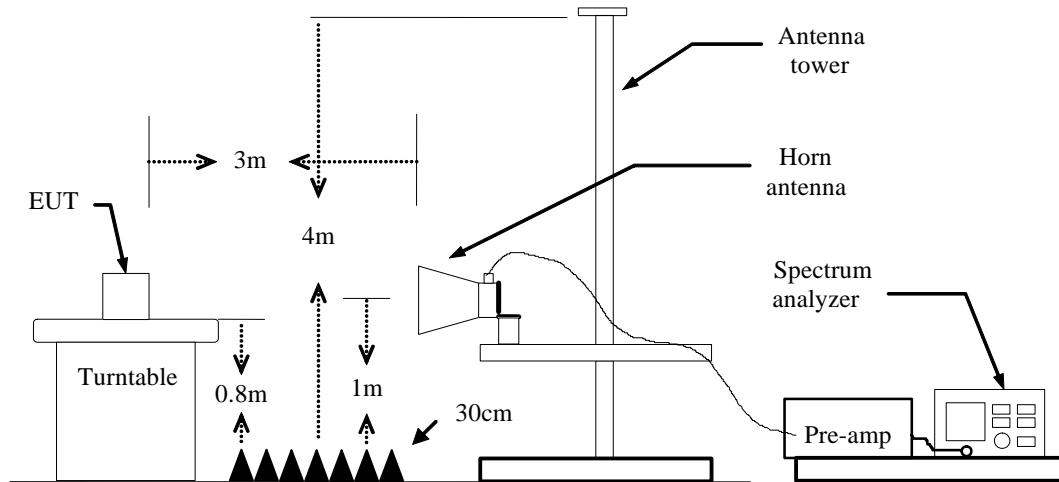

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: TX

Test Date: May 30, 2013

Temperature: 24°C

Tested by: Mark Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
228.8500	55.35	-18.23	37.12	46.00	-8.88	V	QP
367.8833	48.18	-16.69	31.49	46.00	-14.51	V	QP
451.9500	50.77	-15.30	35.47	46.00	-10.53	V	QP
720.3167	42.18	-10.81	31.37	46.00	-14.63	V	QP
880.3667	44.86	-9.97	34.89	46.00	-11.11	V	QP
959.5833	43.33	-8.22	35.11	46.00	-10.89	V	QP
143.1666	52.34	-19.07	33.27	43.50	-10.23	H	QP
217.5332	57.37	-17.95	39.42	46.00	-6.58	H	QP
319.3833	54.33	-17.59	36.74	46.00	-9.26	H	QP
472.9667	44.54	-14.65	29.89	46.00	-16.11	H	QP
720.3166	42.86	-10.81	32.05	46.00	-13.95	H	QP
880.3667	42.27	-9.97	32.30	46.00	-13.70	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV) = Receiver reading
Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain
Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m) = Limit stated in standard
Margin(dB) = Measured (dBuV/m) – Limits (dBuV/m)
Antenna Pole(V/H) = Current carrying line of reading



Above 1 GHz
GFSK

Operation Mode: TX(CH Low)
Temperature: 24°C
Humidity: 52% RH

Test Date: May 25, 2013
Tested by: Mack Li
Polarity: Ver. / Hor.

Table with 8 columns: Frequency (MHz), Reading (dBµV), Correction Factor (dB/m), Result (dBµV/m), Limit (dBµV/m), Margin (dB), Antenna Pole (V/H), Remark. It contains two sets of data rows for various frequencies.

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded...
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode...
4. Spectrum setting:
a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBµV/m) = Limit stated in standard
Margin (dB) = Result (dBµV/m) - Limit (dBµV/m)
Pk = Peak Reading
AV = Average Reading
Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid)

Test Date: May 25, 2013

Temperature: 24°C

Tested by: Mack Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1630.0000	60.12	-8.79	51.33	74.00	-22.67	V	peak
3715.0000	46.35	-2.71	43.64	74.00	-30.36	V	peak
4405.0000	44.88	-0.81	44.07	74.00	-29.93	V	peak
5005.0000	45.16	1.33	46.49	74.00	-27.51	V	peak
5755.0000	45.44	2.59	48.03	74.00	-25.97	V	peak
6325.0000	45.14	4.05	49.19	74.00	-24.81	V	peak
1630.0000	57.10	-8.79	48.31	74.00	-25.69	H	peak
3715.0000	46.50	-2.71	43.79	74.00	-30.21	H	peak
4180.0000	45.51	-1.67	43.84	74.00	-30.16	H	peak
4810.0000	45.60	0.46	46.06	74.00	-27.94	H	peak
5065.0000	45.06	1.39	46.45	74.00	-27.55	H	peak
5710.0000	44.19	2.40	46.59	74.00	-27.41	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBµV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBµV/m) = Limit stated in standard
 Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH High)

Test Date: May 25, 2013

Temperature: 24 °C

Tested by: Mack Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1660.0000	62.77	-8.91	53.86	74.00	-20.14	V	peak
1660.0000	60.05	-8.91	51.14	54.00	-2.86	V	AVG
3235.0000	46.49	-4.07	42.42	74.00	-31.58	V	peak
3940.0000	45.76	-2.52	43.24	74.00	-30.76	V	peak
4375.0000	45.02	-0.91	44.11	74.00	-29.89	V	peak
5290.0000	44.56	1.54	46.10	74.00	-27.90	V	peak
5995.0000	44.60	3.08	47.68	74.00	-26.32	V	peak
1660.0000	59.35	-8.91	50.44	74.00	-23.56	H	peak
3505.0000	46.09	-3.48	42.61	74.00	-31.39	H	peak
3730.0000	45.78	-2.67	43.11	74.00	-30.89	H	peak
4405.0000	44.99	-0.81	44.18	74.00	-29.82	H	peak
4975.0000	45.40	1.21	46.61	74.00	-27.39	H	peak
5590.0000	44.88	1.91	46.79	74.00	-27.21	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBµV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBµV/m) = Limit stated in standard
 Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



8DPSK

Operation Mode: TX(CH Low)

Test Date: May 25, 2013

Temperature: 24°C

Tested by: Mack Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1600.0000	62.11	-8.68	53.43	74.00	-20.57	V	peak
1600.0000	60.16	-8.68	51.48	54.00	-2.52	V	AVG
3310.0000	47.02	-4.04	42.98	74.00	-31.02	V	peak
3835.0000	46.09	-2.50	43.59	74.00	-30.41	V	peak
4345.0000	45.86	-1.03	44.83	74.00	-29.17	V	peak
5140.0000	44.89	1.48	46.37	74.00	-27.63	V	peak
5425.0000	45.94	1.57	47.51	74.00	-26.49	V	peak
1600.0000	56.45	-8.68	47.77	74.00	-26.23	H	peak
3655.0000	45.92	-2.87	43.05	74.00	-30.95	H	peak
4465.0000	45.75	-0.70	45.05	74.00	-28.95	H	peak
4990.0000	45.62	1.27	46.89	74.00	-27.11	H	peak
5395.0000	44.71	1.52	46.23	74.00	-27.77	H	peak
5845.0000	44.64	2.85	47.49	74.00	-26.51	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBµV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBµV/m) = Limit stated in standard
 Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid)

Test Date: May 25, 2013

Temperature: 24°C

Tested by: Mack Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1630.0000	59.94	-8.79	51.15	74.00	-22.85	V	peak
3265.0000	46.30	-4.06	42.24	74.00	-31.76	V	peak
4000.0000	45.67	-2.53	43.14	74.00	-30.86	V	peak
4720.0000	44.91	0.06	44.97	74.00	-29.03	V	peak
5155.0000	44.23	1.50	45.73	74.00	-28.27	V	peak
5575.0000	44.63	1.88	46.51	74.00	-27.49	V	peak
1630.0000	56.55	-8.79	47.76	74.00	-26.24	H	peak
3865.0000	45.49	-2.50	42.99	74.00	-31.01	H	peak
4540.0000	44.62	-0.57	44.05	74.00	-29.95	H	peak
4825.0000	45.60	0.52	46.12	74.00	-27.88	H	peak
5440.0000	46.92	1.60	48.52	74.00	-25.48	H	peak
6295.0000	44.30	3.97	48.27	74.00	-25.73	H	peak

Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum setting:
 - Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- Frequency (MHz) = Emission frequency in MHz

Reading (dBµV/m) =Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBµV/m) = Limit stated in standard

Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)

Pk = Peak Reading

AV = Average Reading

Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH High)

Test Date: May 25, 2013

Temperature: 24 °C

Tested by: Mack Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1660.0000	62.48	-8.91	53.57	74.00	-20.43	V	peak
1660.0000	59.92	-8.91	51.01	54.00	-2.99	V	AVG
3265.0000	46.49	-4.06	42.43	74.00	-31.57	V	peak
4180.0000	45.64	-1.67	43.97	74.00	-30.03	V	peak
4750.0000	44.91	0.19	45.10	74.00	-28.90	V	peak
5320.0000	45.32	1.53	46.85	74.00	-27.15	V	peak
1660.0000	58.82	-8.91	49.91	74.00	-24.09	H	peak
2815.0000	47.26	-4.98	42.28	74.00	-31.72	H	peak
3985.0000	45.68	-2.53	43.15	74.00	-30.85	H	peak
4825.0000	44.89	0.52	45.41	74.00	-28.59	H	peak
4975.0000	44.95	1.21	46.16	74.00	-27.84	H	peak
5635.0000	45.08	2.08	47.16	74.00	-26.84	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBµV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBµV/m) = Limit stated in standard
 Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



6.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	09/20/2012	09/20/2013
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

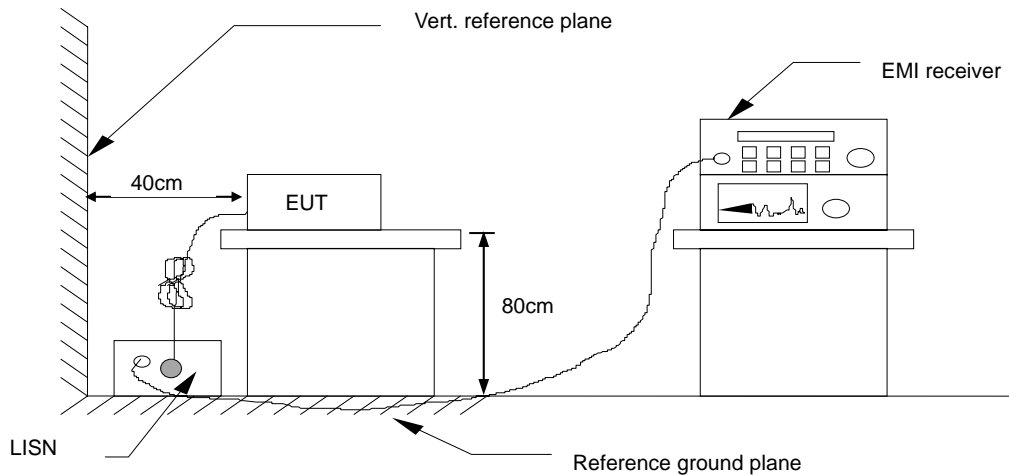

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Test Data

Operation Mode: HARMAN KARDON ONYX Test Date: May 9, 2013
Temperature: 22°C Humidity: 45% RH
Tested by: Paul Pan

Table with 11 columns: Frequency (MHz), QuasiPeak Reading (dBuV), Average Reading (dBuV), Correction Factor (dB), QuasiPeak Result (dBuV), Average Result (dBuV), QuasiPeak Limit (dBuV), Average Limit (dBuV), QuasiPeak Margin (dB), Average Margin (dB), Line (L1/L2). Rows include frequencies from 0.1500 to 15.7940 MHz and 0.1539 to 7.8180 MHz.

Note:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)