

# TEST REPORT

<b>Applicant:</b>	Harman International Industries, Incorporated
<b>Address of Applicant:</b>	8500 Balboa Blvd, Northridge, CA 91329, United States
<b>Manufacturer:</b>	Harman International Industries, Incorporated
<b>Address of Manufacturer:</b>	8500 Balboa Blvd, Northridge, CA 91329, United States
<b>Product name:</b>	Powered soundbar speaker
<b>Model:</b>	CINEMA SB400
<b>Rating(s):</b>	100-240V~, 50/60Hz, 100W
<b>Trademark:</b>	JBL
<b>Standards:</b>	FCC Part 15.247 :2010 RSS-210 issue 8
<b>FCC ID:</b>	APISB400CGG
<b>IC ID:</b>	6132A-SB400CGG
<b>Date of Receipt:</b>	2012-10-15
<b>Date of Test:</b>	2012-10-15~2012-10-25
<b>Date of Issue:</b>	2012-10-29
<b>Test Result</b>	<b>Pass*</b>

\* In the configuration tested, the test item complied with the standards specified above.

**Authorized for issue by:**

**Test by:**

*Jumy Qiu*

**Reviewed by:**

*Pauler Li*

Oct.29.2012 Jumy Qiu

Project Engineer

Oct.29.2012

Pauler Li

Project Engineer

Date

Name/Position

Signature

Date

Name/Position

Signature

**Possible test case verdicts:**

test case does not apply to the test object ..: N/A

test object does meet the requirement .....: P (Pass)

test object does not meet the requirement ..: F (Fail)

**Testing Laboratory information:**

Testing Laboratory Name .....: I-Test Laboratory

Address.....: 1-2 floor, South Block, Building A2 , No 3 Keyan Lu, Science City, Guangzhou, Guangdong Province, P.R. China

Testing location : Same as above

Tel : 0086-20-32209330

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

**This report would be invalid test report without all the signatures of testing technician and approver.**

**This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.**

**General product information:**

The EUT include two parts, One is centre part with Bluetooth and 2.4G FSK wireless module, the other part is subwoofer part with 2.4G FSK wireless module. The report is for Centre part of the system.

The EUT have two kinds of power board, One is power supply board of soundbar (JQH, type:NER-SPM00-217) and power supply board of subwoofer (JQH, type:NER-SPM00-216); The alternative power supply board of soundbar (Hanwei, type: Hanny13w70) and power supply board of subwoofer (Hanwei, type: Hanny23w150). Two kinds of power board have been tested. The worse-case is with power supply board of soundbar (Hanwei, type:Hanny13w70) and power supply board of subwoofer (Hanwei, type: Hanny23w150)

## 1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth (99% and -20dB)	FCC PART 15 C section 15.247 (a)(1); RSS 210 A8.1 (1)	ANSI C63.10: Clause 6.9 & DA 00-705	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1); RSS 210 A8.1 (1)	DA 00-705	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(iii) RSS 210 A8.1 (4)	DA 00-705	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(iii); RSS 210 A8.1 (4)	DA 00-705	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(1); RSS 210 A8.4 (2)	ANSI C63.10: Clause 6.10 & DA 00-705	PASS
Conducted Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d); RSS 210 A8.5	ANSI C63.10: Clause 6.7 & DA 00-705	PASS
Radiated Spurious Emission (9 kHz to 25 GHz)	FCC PART 15 C section 15.247(d); RSS 210 A8.5	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9 & DA 00-705	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207; RSS GEN Table 2	ANSI C63.10: Clause 6.2 & DA 00-705	PASS
<b>Remark:</b>			
N/A: not applicable. Refer to the relative section for the details.			
EUT: In this whole report EUT means Equipment Under Test.			
Tx: In this whole report Tx (or tx) means Transmitter.			
Rx: In this whole report Rx (or rx) means Receiver.			
RF: In this whole report RF means Radio Frequency.			
ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.			
DA 00-705: "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"			

## 2 Contents

	Page
<b>TEST REPORT.....</b>	<b>1</b>
<b>1 TEST SUMMARY .....</b>	<b>3</b>
<b>2 CONTENTS .....</b>	<b>4</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
<b>3.1 CLIENT INFORMATION .....</b>	<b>5</b>
<b>3.2 GENERAL DESCRIPTION OF E.U.T.....</b>	<b>5</b>
<b>3.3 DETAILS OF E.U.T.....</b>	<b>5</b>
<b>3.4 DESCRIPTION OF SUPPORT UNITS .....</b>	<b>5</b>
<b>3.5 TEST LOCATION.....</b>	<b>6</b>
<b>3.6 DEVIATION FROM STANDARDS .....</b>	<b>6</b>
<b>3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....</b>	<b>6</b>
<b>3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....</b>	<b>6</b>
<b>3.9 TEST FACILITY .....</b>	<b>6</b>
<b>3.10 MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>4 INSTRUMENTS USED DURING TEST.....</b>	<b>7</b>
<b>5 TEST RESULTS.....</b>	<b>8</b>
<b>5.1 E.U.T. TEST CONDITIONS .....</b>	<b>8</b>
<b>5.2 ANTENNA EQUIREMENT .....</b>	<b>11</b>
<b>5.3 OCCUPIED BANDWIDTH .....</b>	<b>12</b>
<b>5.4 CARRIER FREQUENCIES SEPARATED .....</b>	<b>22</b>
<b>5.5 HOPPING CHANNEL NUMBER.....</b>	<b>27</b>
<b>5.6 DWELL TIME.....</b>	<b>29</b>
<b>5.7 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>42</b>
<b>5.8 CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>49</b>
<b>5.9 RADIATED SPURIOUS EMISSIONS .....</b>	<b>53</b>
<b>5.9.1 Harmonic and other spurious emissions.....</b>	<b>56</b>
<b>5.10 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....</b>	<b>104</b>
<b>5.11 BAND EDGES REQUIREMENT .....</b>	<b>108</b>
<b>5.12 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 kHz TO 30 MHz.....</b>	<b>112</b>
<b>5.12.1 Measurement Data.....</b>	<b>114</b>

### 3 General Information

#### 3.1 Client Information

Applicant: Harman International Industries, Incorporated  
Address of Applicant: 8500 Balboa Blvd, Northridge, CA 91329, United States

#### 3.2 General Description of E.U.T.

Name: Powered soundbar speaker  
Model No.: CINEMA SB400  
Trade Mark: JBL  
Operating Frequency: 2402 MHz to 2480 MHz for Bluetooth;  
2403.5MHz to 2477.3MHz for 2.4G FSK wireless module.  
Channels: 79 channels with 1MHz step for Bluetooth  
49 channels with 1.53MHz step for 2.4G FSK wireless module  
Type of Modulation GFSK, ( $\pi/4$ ) DQPSK, 8DPSK for Bluetooth  
FSK for 2.4G FSK wireless module  
Dwell time Per channel is less than 0.4s.  
Antenna Type Cable antenna  
Antenna gain: 2dBi  
Speciality: Bluetooth 2.1 with EDR  
Function: Audio speaker system with Bluetooth function.

#### 3.3 Details of E.U.T.

EUT Power Supply: AC Power, Class II  
Rated power: 100-240V~, 50/60Hz 100W  
Test mode: The program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel lowest (2402MHz), middle (2441MHz) and highest (2480MHz) are chosen for bluetooth full testing.  
Channel lowest (2403.5MHz), middle (2440.4MHz) and highest (2477.3MHz) are chosen for 2.4G FSK wireless module full testing.  
Normal mode: the Bluetooth has been tested on the Modulation of GFSK;  
EDR mode: the Bluetooth has been tested on the Modulation of ( $\pi/4$ )DQPSK and 8DPSK, compliance test and record the worst case on 8DPSK.  
Power cord: 1.5m\*2 power cord

#### 3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

### 3.5 Test Location

All tests were performed at:

Guangzhou ITL Co., Ltd.

1-2 floor, South Block, Building A2 , No 3 Keyan Lu, Science City, Guangzhou, Guangdong Province, P.R. China

0086-20-32209330

itl@i-testlab.com

No tests were sub-contracted.

### 3.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

### 3.7 Abnormalities from Standard Conditions

None.

### 3.8 Other Information Requested by the Customer

None.

### 3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS( Lab code:L4957)**
- **FCC ( Registration No.:935596)**
- **IC (Registration NO.:8368A)**

### 3.10 Measurement Uncertainty

Parameter	Uncertainty
Radio frequency	$\pm 1.06 \times 10^{-7}$
total RF power, conducted	1.37 dB
RF power density , conducted	2.89 dB
All emissions, radiated	$\pm 3.35$ dB
Temperature	$\pm 0.23$ °C
Humidity	$\pm 0.3$ %
DC and low frequency voltages	$\pm 0.3$ %

## 4 Instruments Used during Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Due Date
1	Spectrum Analyzer	Agilent	N9010A	MY51250936	2013.02.29
2	Pre Amplifier	HP	8447F	3113A05905	2013.09.06
3	Pre Amplifier	Mini-circuits	MLA-0120-A02-34	2648A04738	2013.06.07
4	Biconilog Antenna	ETS•Lindgren	3142D	00108096	2013.01.28
5	Horn Antenna	A-INFOMW	JXTXLB-10180-N	J2031090612 133	2012.12.17
6	EMI Test Receiver	R&S	ESCI	100124	2013.06.07
7	LISN	R&S	ENV216	100120	2013.06.07
8	50Ω Coaxial Cable	Mini-circuits	CBL	ITL-115	2013.09.06
9	Semi-Anechoic chamber	ETS•Lindgren	FACT3 2.0	ITL-100	2013.04.10
10	Loop Antenna	ZHINAN	ZN30900A	002489	2013.01.22

## 5 Test Results

### 5.1 E.U.T. test conditions

<b>Test Voltage:</b>	Input: AC 120V, 60 Hz
<b>Temperature:</b>	20.0 -25.0 °C
<b>Humidity:</b>	38-50 % RH
<b>Atmospheric Pressure:</b>	1000 -1010 mbar
<b>Test frequencies and frequency range:</b>	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

**Number of fundamental frequencies to be tested in EUT transmit band**

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

**Frequency range of radiated emission measurements**

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list for bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434
33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	74	2476
43	2445	59	2461	75	2477
44	2446	60	2462	76	2478
45	2447	61	2463	77	2479
46	2448	62	2464	78	2480
47	2449	63	2465		
48	2450	64	2466		

Test frequencies are the lowest channel: 0 channel(2402 MHz), middle channel: 39 channel(2441 MHz) and highest channel: 78 channel(2480 MHz)

EUT channels and frequencies list for 2.4G wireless module:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2403.5	14	2423.5	27	2443.5	40	2463.5
2	2405.1	15	2425.1	28	2445.0	41	2465.0
3	2406.6	16	2426.6	29	2446.6	42	2466.6
4	2408.1	17	2428.1	30	2448.1	43	2468.1
5	2409.7	18	2429.7	31	2449.6	44	2469.6
6	2411.2	19	2431.2	32	2451.2	45	2471.2
7	2412.8	20	2432.7	33	2452.7	46	2472.7
8	2414.3	21	2434.3	34	2454.3	47	2474.2
9	2415.8	22	2435.8	35	2455.8	48	2475.8
10	2417.4	23	2437.4	36	2457.3	49	2477.3
11	2418.9	24	2438.9	37	2458.9		
12	2420.4	25	2440.4	38	2460.4		
13	2422.0	26	2442.0	39	2461.9		

Channel lowest (2403.5MHz), middle (2440.4MHz) and highest (2477.3MHz) are chosen for 2.4G FSK wireless module full testing.

## 5.2 Antenna requirement

### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna

The antenna is an internal Cable antenna and no consideration of replacement. The best case gain of the antenna is 2dBi.

**Test result: The unit does meet the FCC requirements.**

### 5.3 Occupied Bandwidth


**Test Requirement:** FCC Part 15 C section 15.247 and RSS-210

(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Method:** ANSI C63.10: Clause 6.9 & DA 00-705

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest, middle and highest channel with different data package. Compliance test in normal mode (DH5) EDR mode (3DH5) and FSK mode as the worst case was found.

**Test Configuration:**

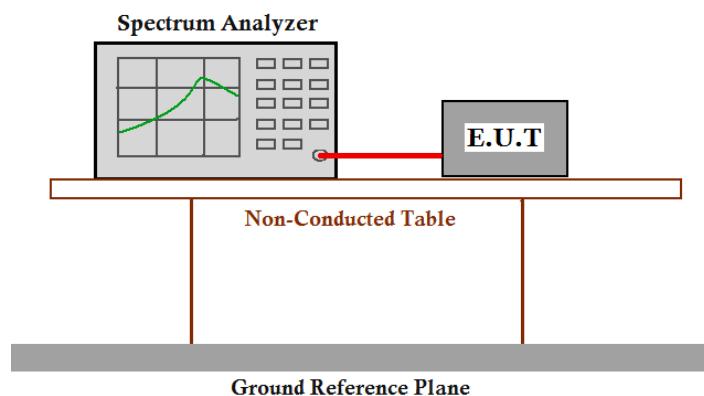

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centring on a hopping channel;
3. Set the spectrum analyzer: RBW  $\geq$  1% of the 20dB bandwidth VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20dB points bandwidth.

**Test result (-20dB bandwidth), For bluetooth****Normal mode:**

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.13	0.75
Middle	1.14	0.76
Highest	1.13	0.75

**EDR mode:**

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.39	0.93
Middle	1.39	0.93
Highest	1.39	0.93

**Test result (99% bandwidth)****EDR mode:**

Test Channel	Bandwidth(MHz)
Lowest	1.22
Middle	1.23
Highest	1.22

**Test result (-20dB bandwidth), For 2.4G FSK wireless module****FSK mode:**

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	2.19	1.46
Middle	2.20	1.47
Highest	2.22	1.48

**Test result (99% bandwidth)****FSK mode:**

Test Channel	Bandwidth(MHz)
Lowest	2.16
Middle	2.14
Highest	2.14

For bluetooth

Result plot as follows:

DH5:


Lowest Channel:



Middle Channel:



## Highest Channel:

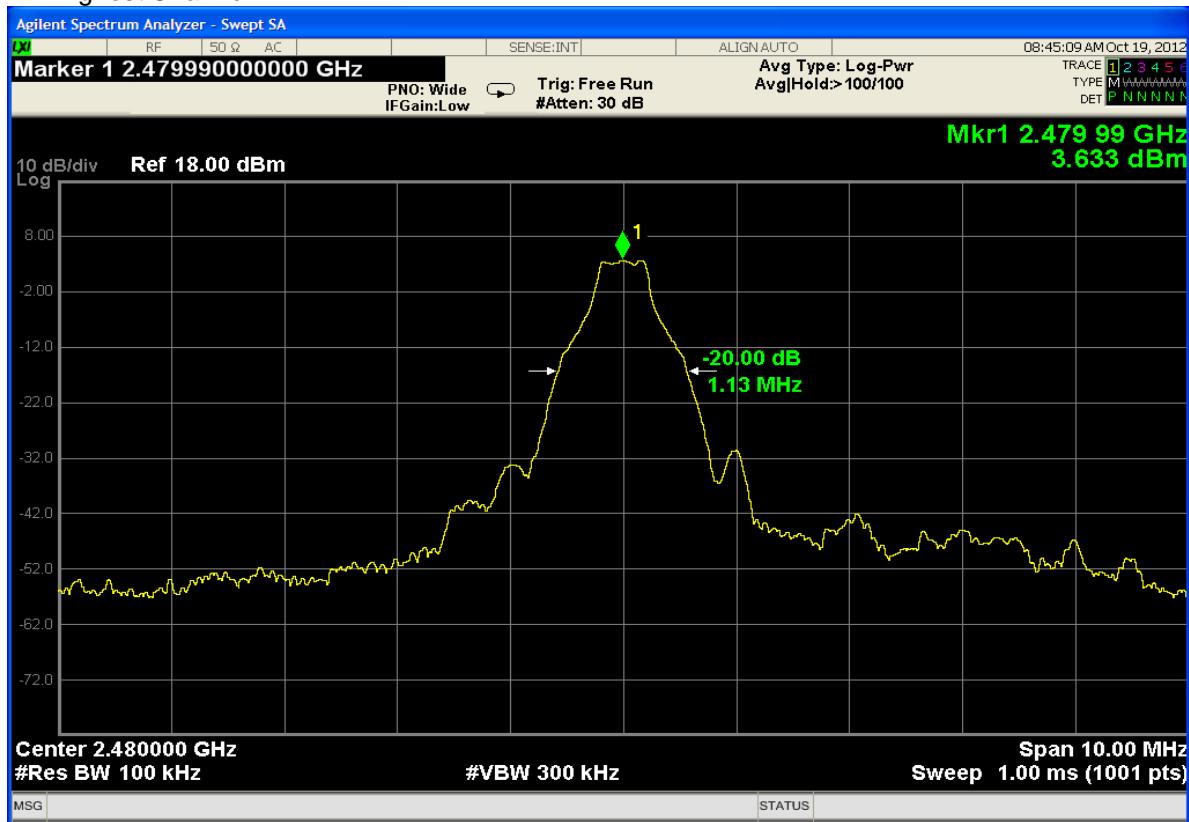

3DH5:


## Lowest channel:



Middle channel:




Highest channel:

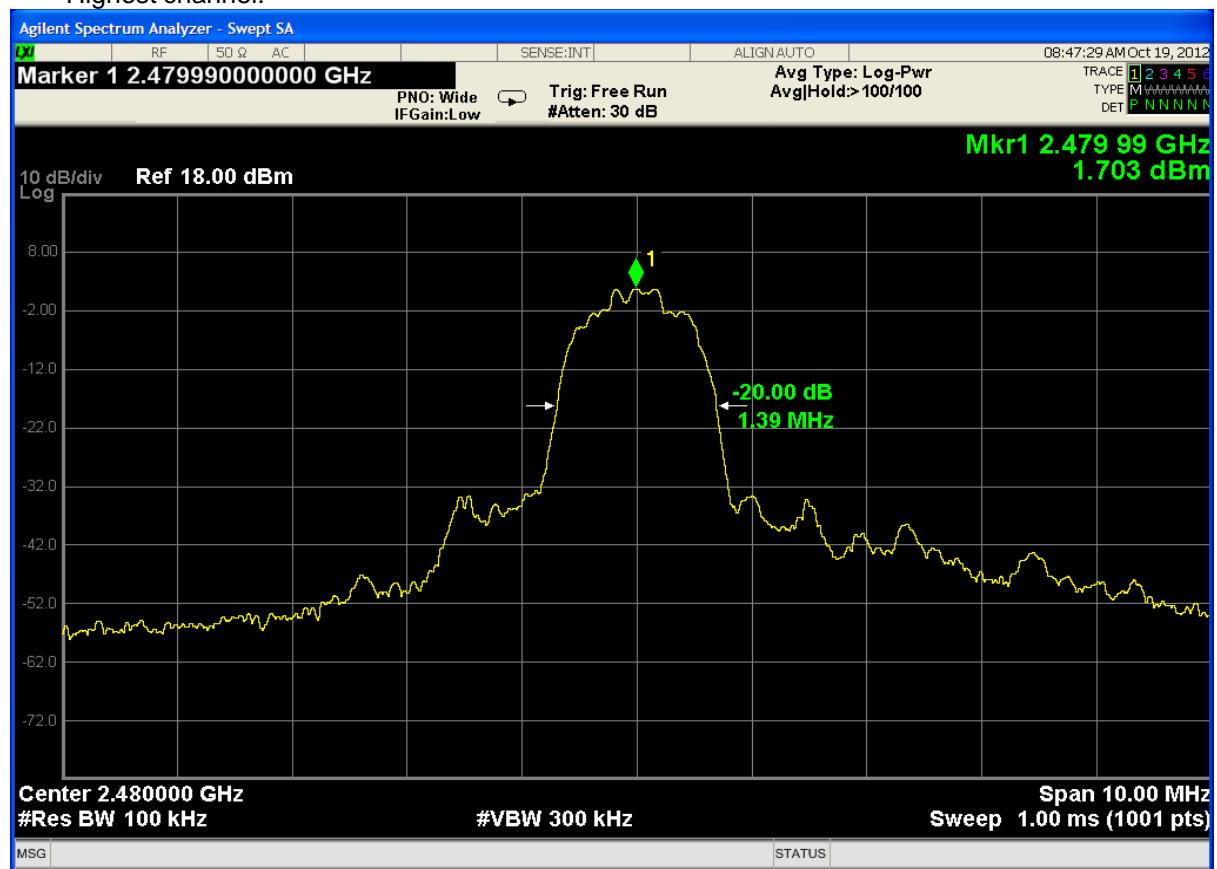

**3DH5:(99% bandwidth)**


Lowest channel:

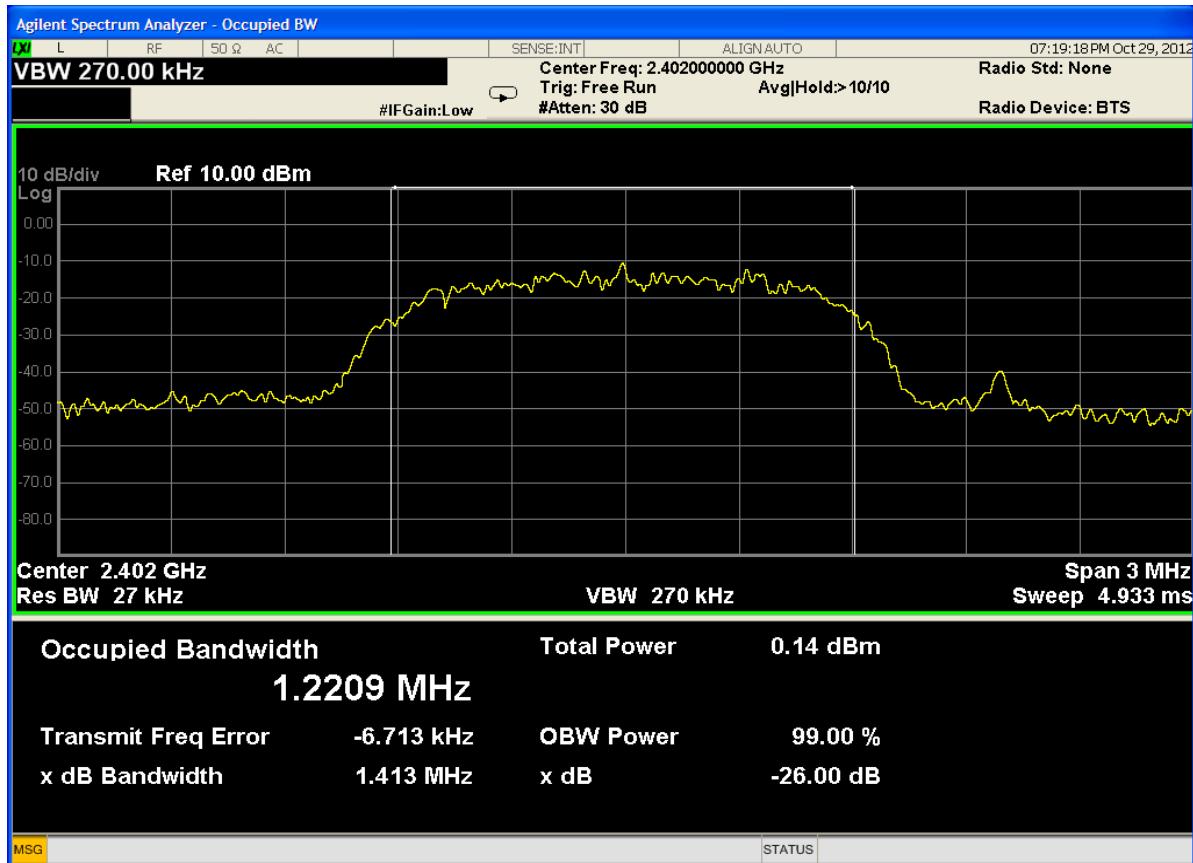

Middle channel:



Highest channel:

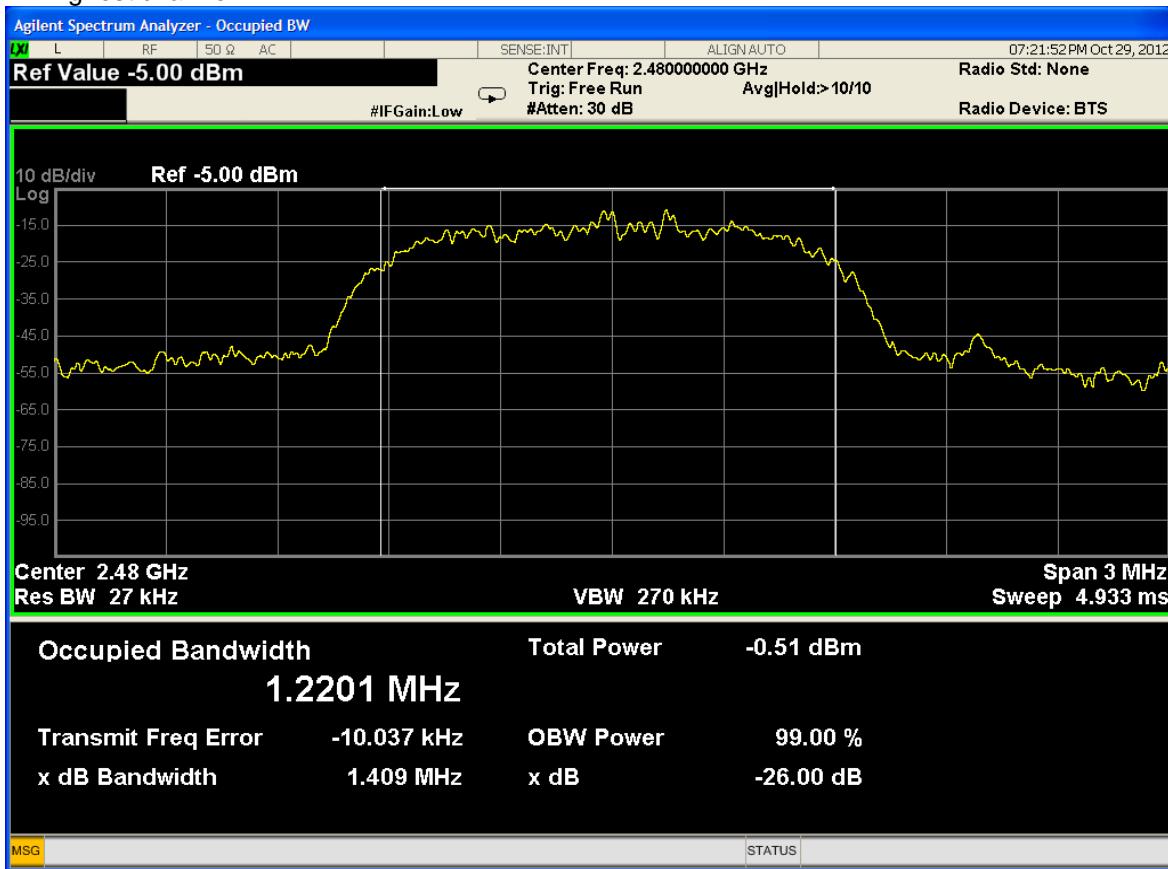


For 2.4G FSK


wireless module

Result plot as follows:


Lowest Channel:

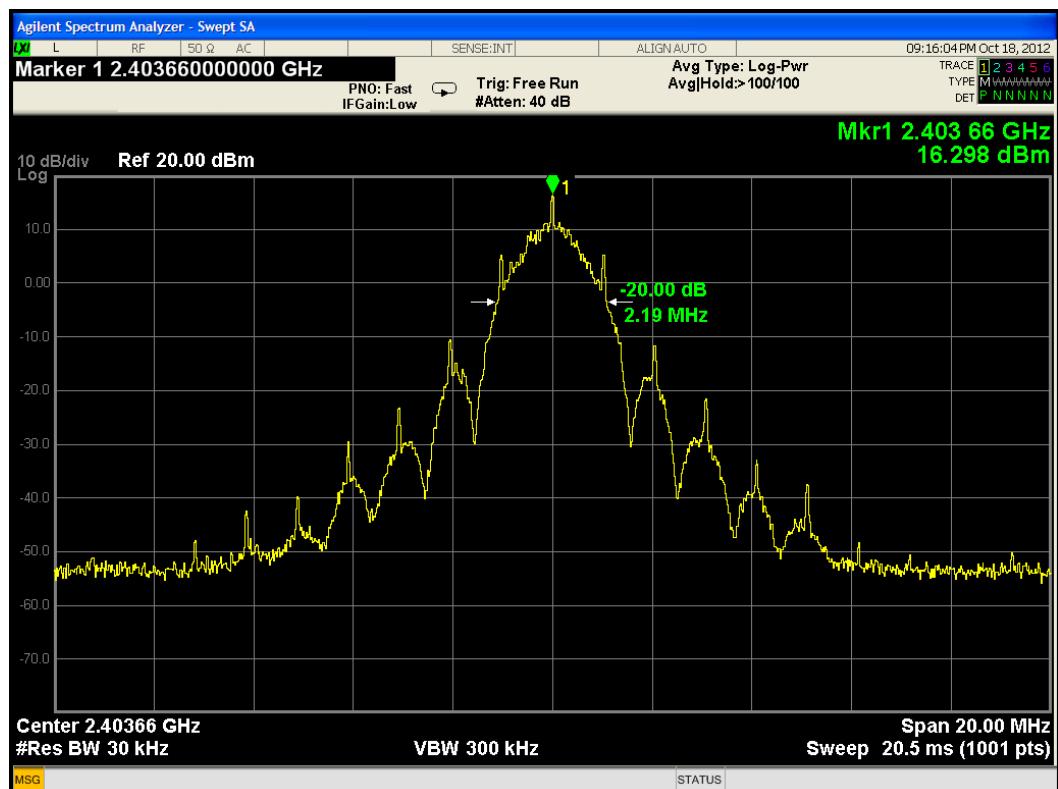

## Middle Channel:

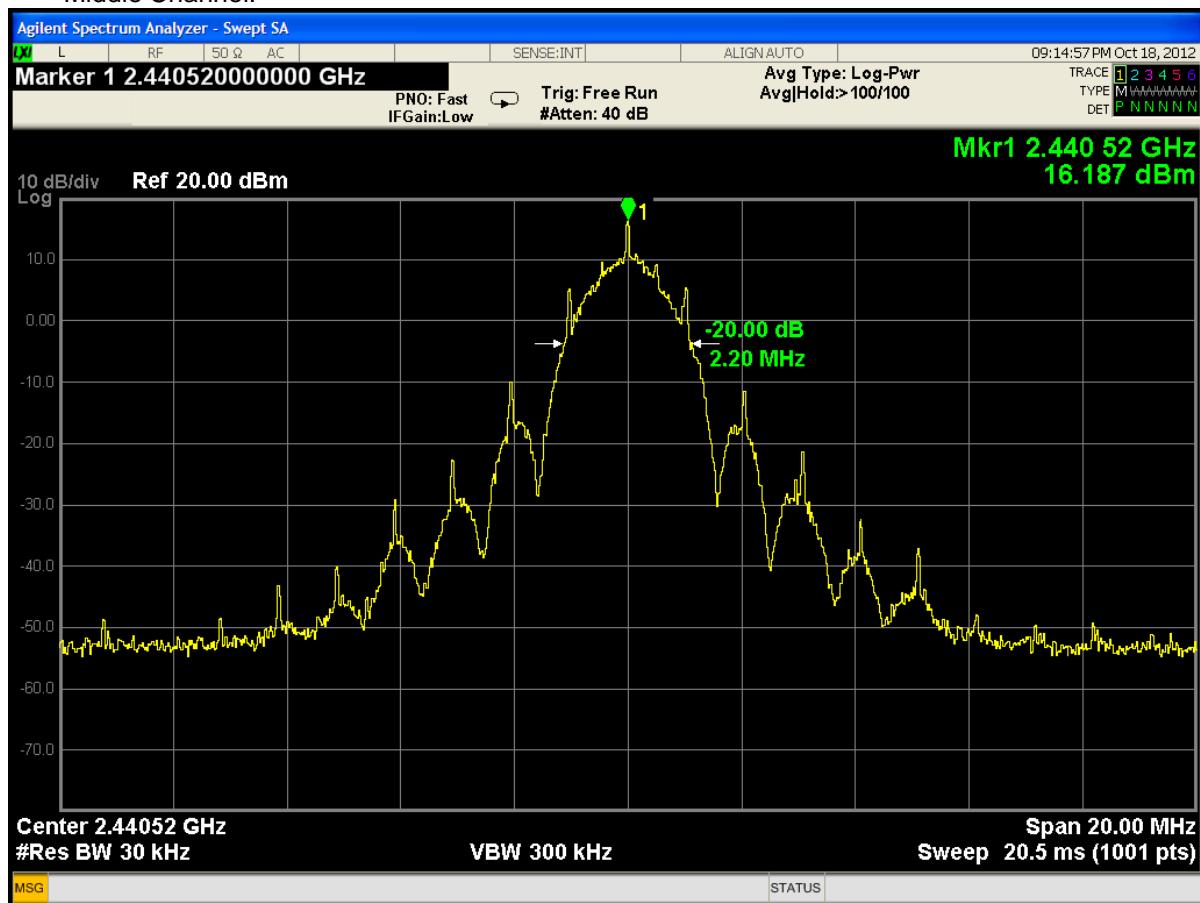


## Highest Channel:

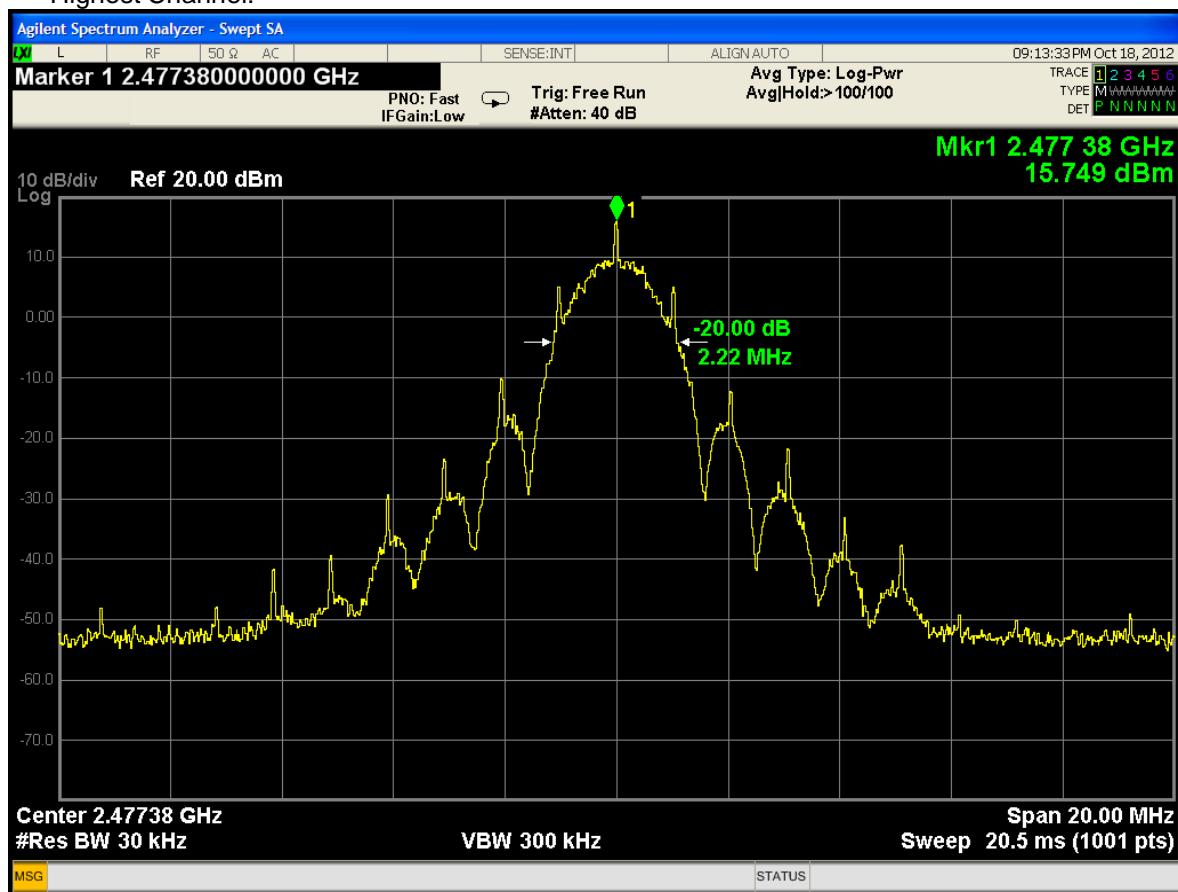


(99% bandwidth)


Lowest channel:

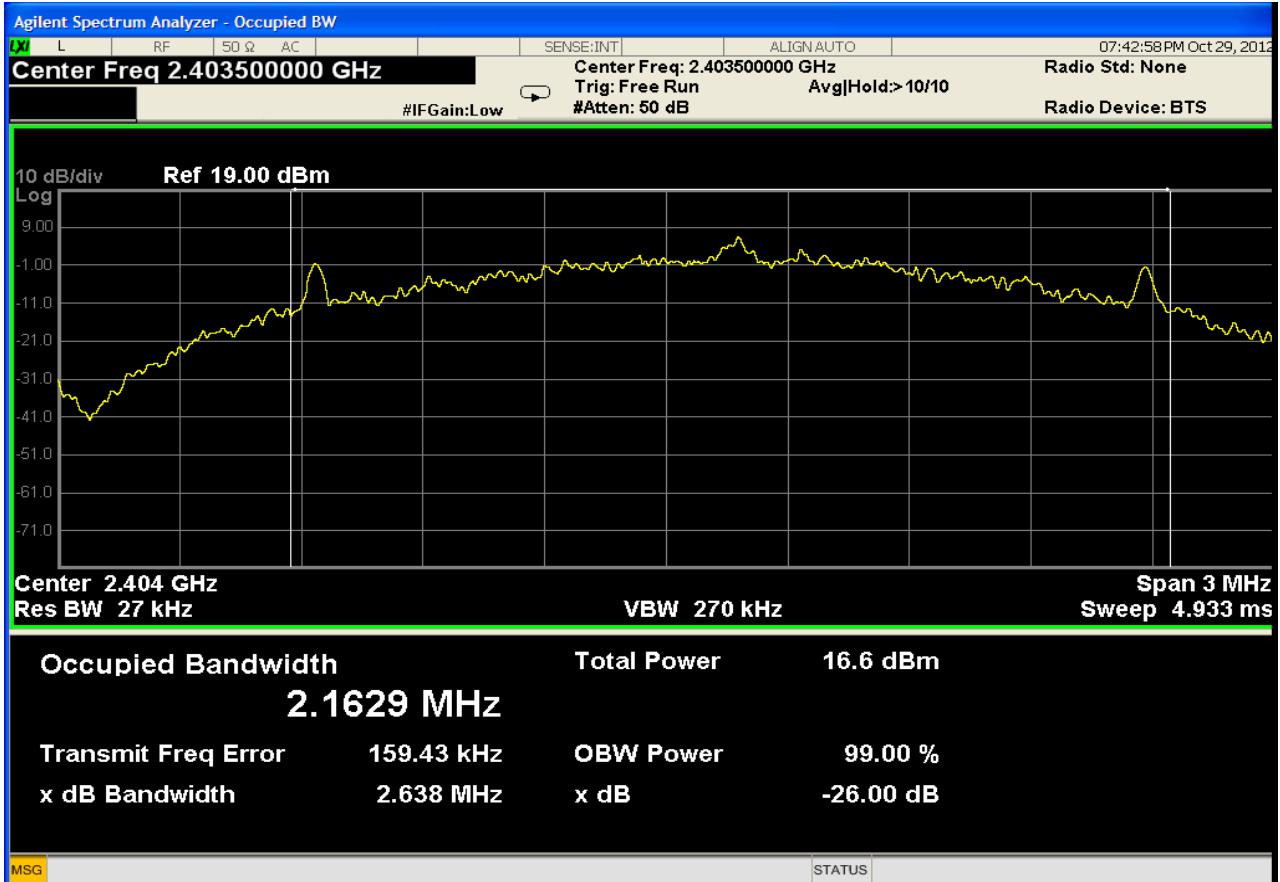

Middle channel:

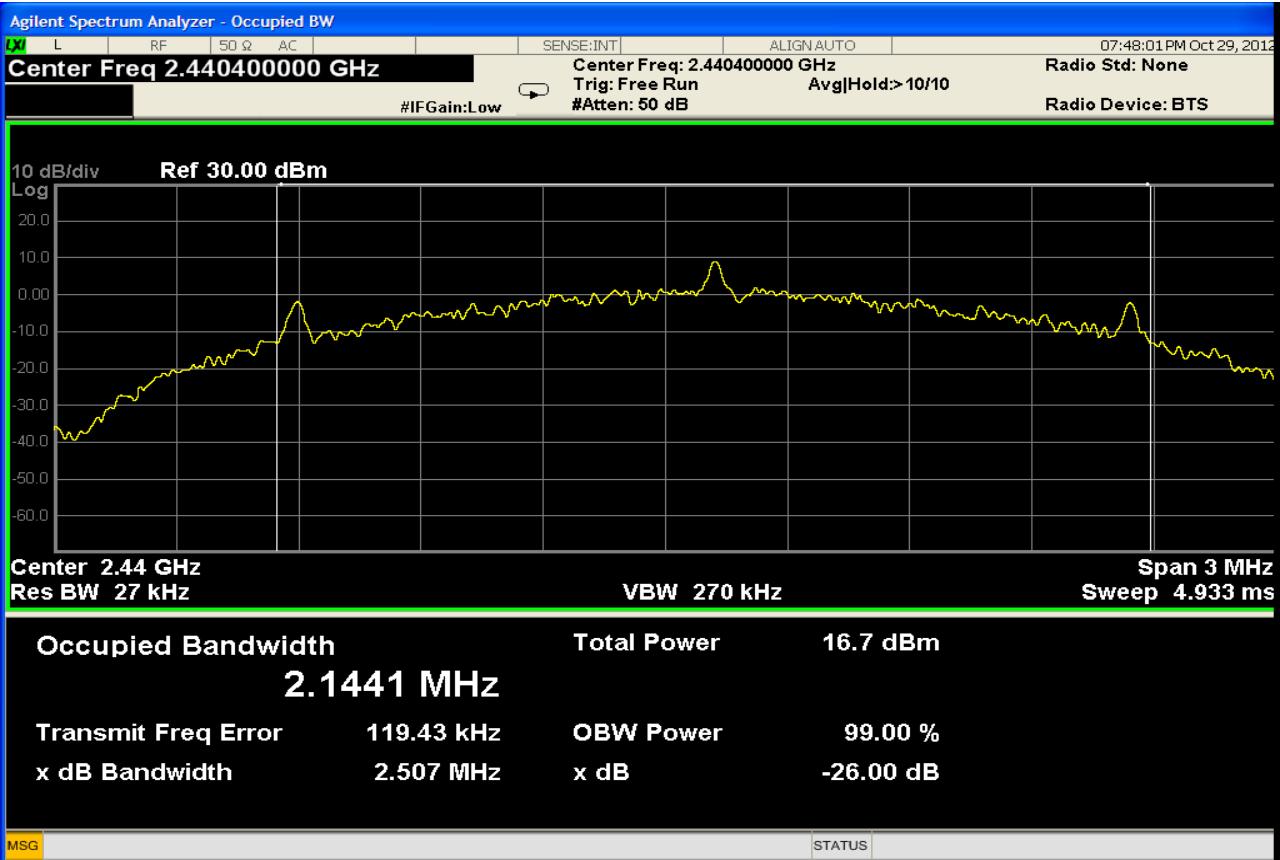

Highest channel:

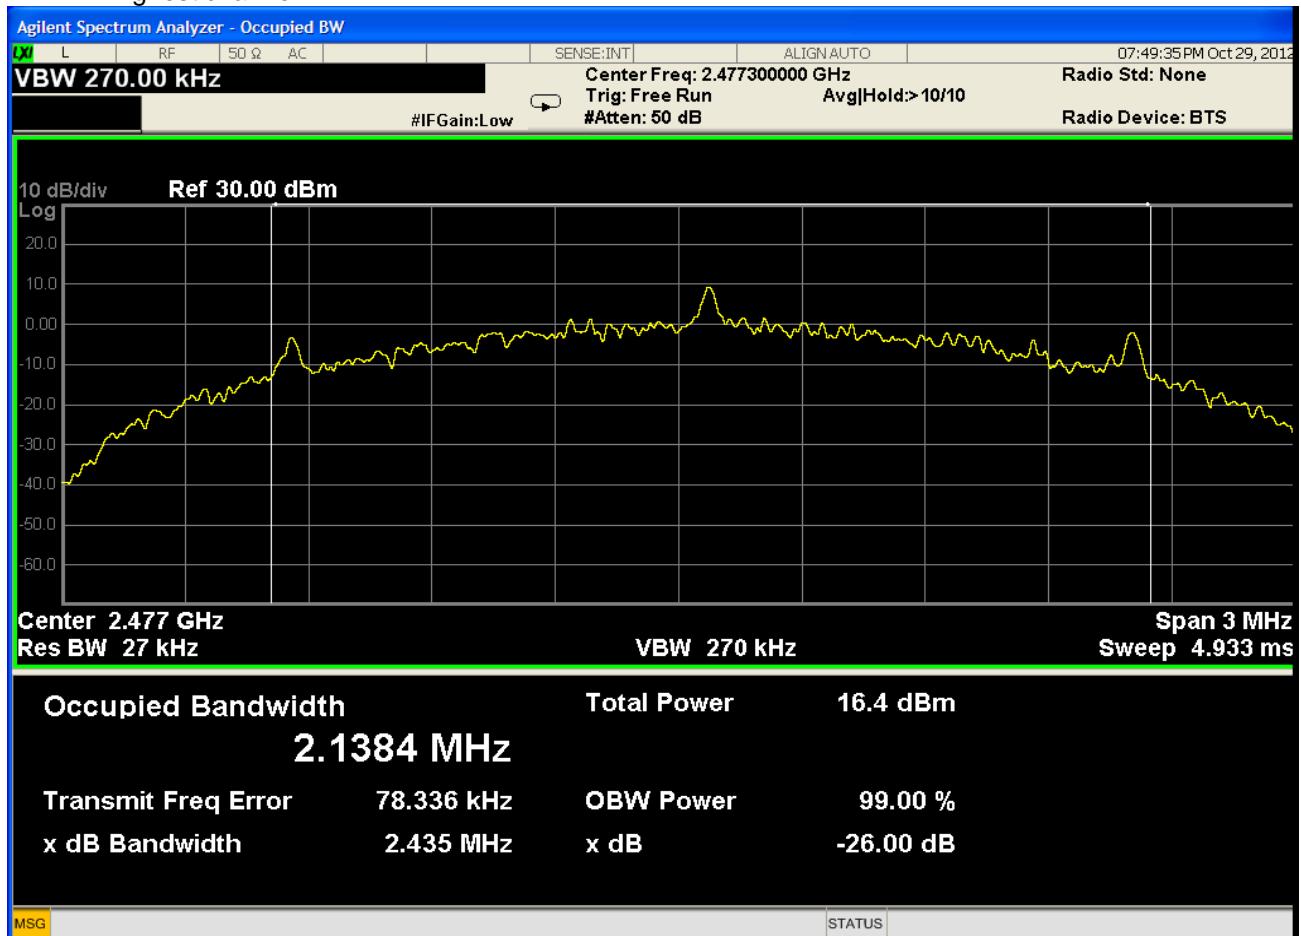

## 5.4 Carrier Frequencies Separated


**Test Requirement:** FCC Part 15 C section 15.247 and RSS-210

(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Method:** DA 00-705

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest, middle and highest channel and hopping mode with different data packet. Compliance test in hopping with normal mode (DH5) and FSK mode as the worst case was found.

**Test Configuration:**

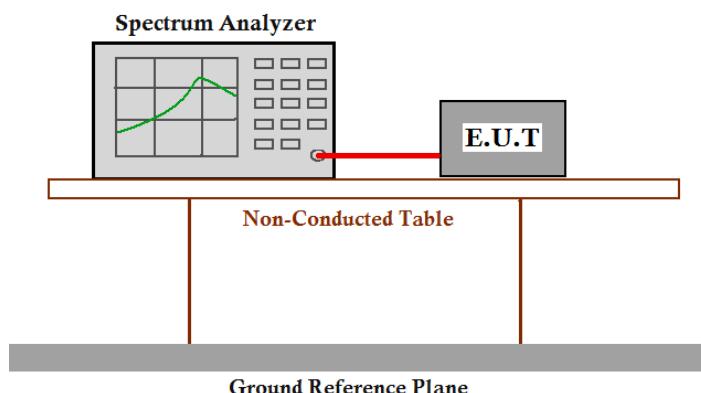

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1% of the span, VBW  $\geq$  RBW, Sweep = auto; Detector Function = Peak. Trace = Max, hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

**Test result:****For bluetooth**

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.01MHz	Pass
Middle Channels (channel 39 and channel 40)	1.01MHz	Pass
Upper Channels (channel 77 and channel 78)	1.01MHz	Pass
<b>Remark:</b>  The limit is maximum two-thirds of the 20 dB bandwidth: 0.921 MHz		

**For 2.4G FSK wireless module**

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 1 and channel 2)	1.54MHz	Pass
Middle Channels (channel 24 and channel 25)	1.54MHz	Pass
Upper Channels (channel 48 and channel 49)	1.54MHz	Pass
<b>Remark:</b>  The limit is maximum two-thirds of the 20 dB bandwidth: 1.48 MHz		


For buletooth

Carrier Frequencies Separated plot:

1. Lowest Channels:



2. Middle Channels:

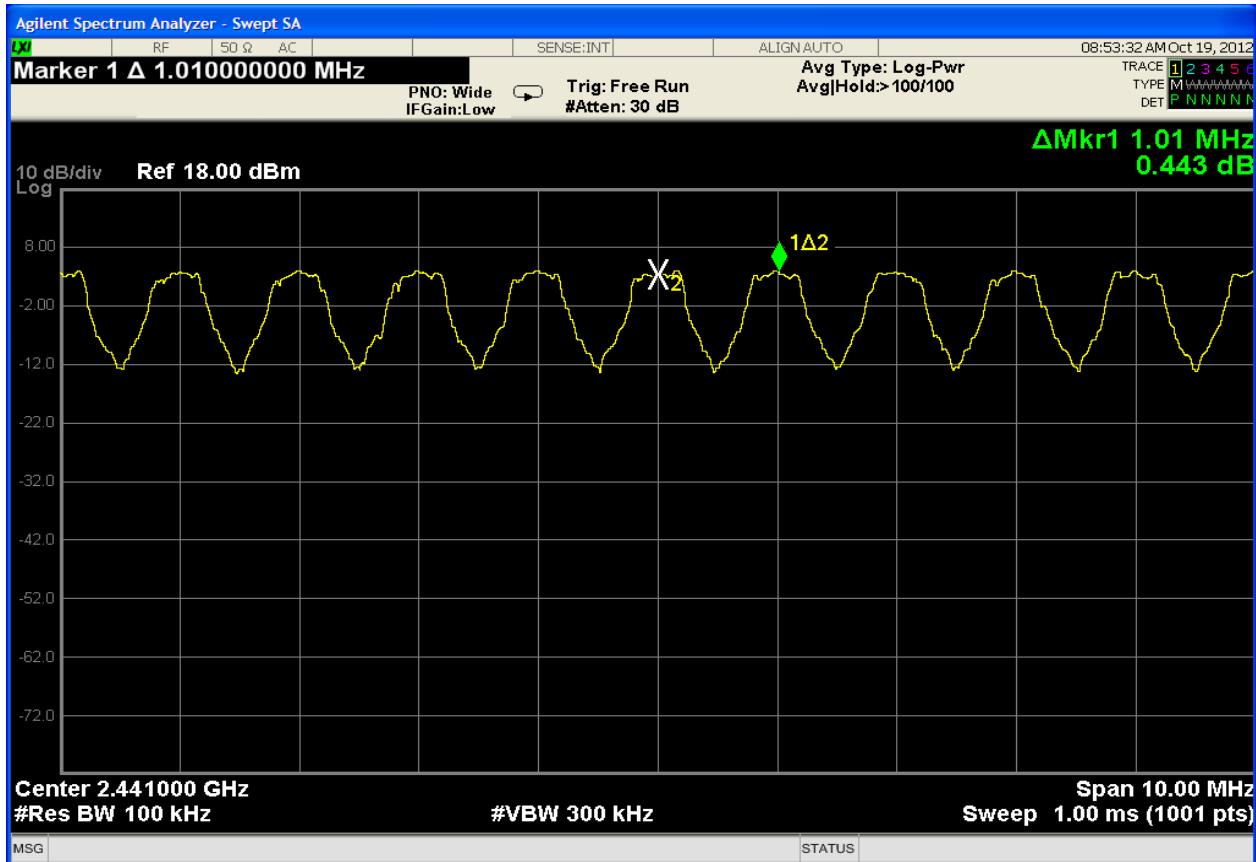

## 3. Highest Channels



For 2.4G FSK wireless module

Carrier Frequencies Separated plot:

## 1. Lowest Channels:



## 2. Middle Channels:



## 3. Highest Channels



## 5.5 Hopping Channel Number


**Test Requirement:** FCC Part15 C section 15.247 and RSS-210

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

**Test Method:** DA 00-705

**Test Status:** Pre-test the EUT in hopping mode with different data packet. Compliance test in hopping with normal mode (DH5) and FSK mode as the worst case was found.

**Test Configuration:**

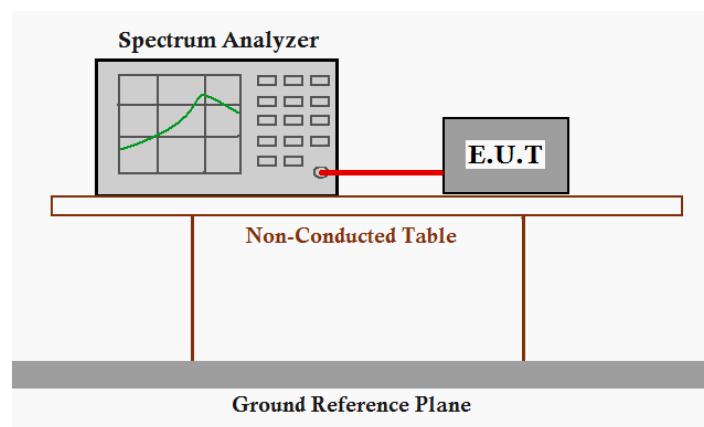


**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400 MHz. stop frequency = 2483.5 MHz. Submit the test result graph.


## For buletooth

**Test result:** Total channels are 79 channels.

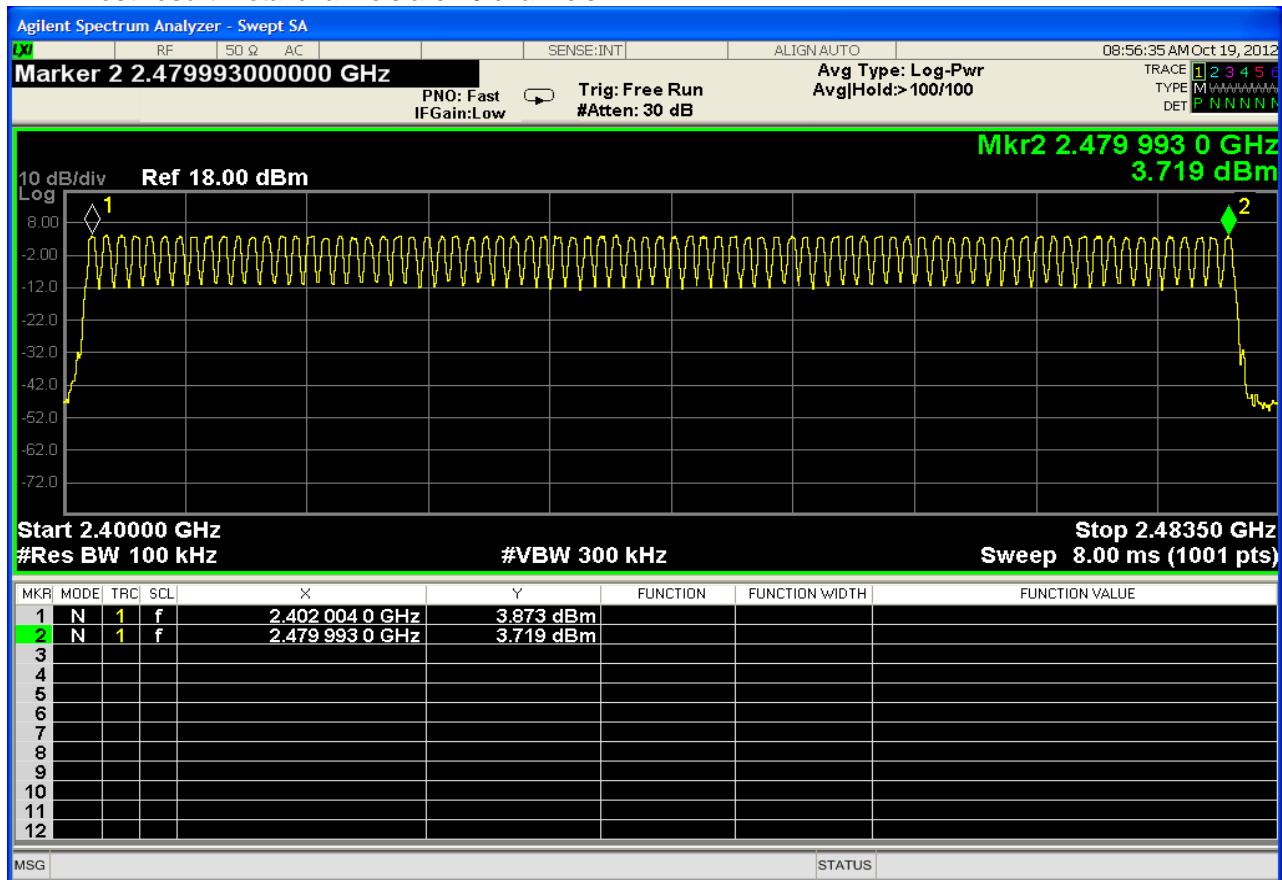

## For 2.4G FSK wireless module

**Test result:** Total channels are 20 channels.

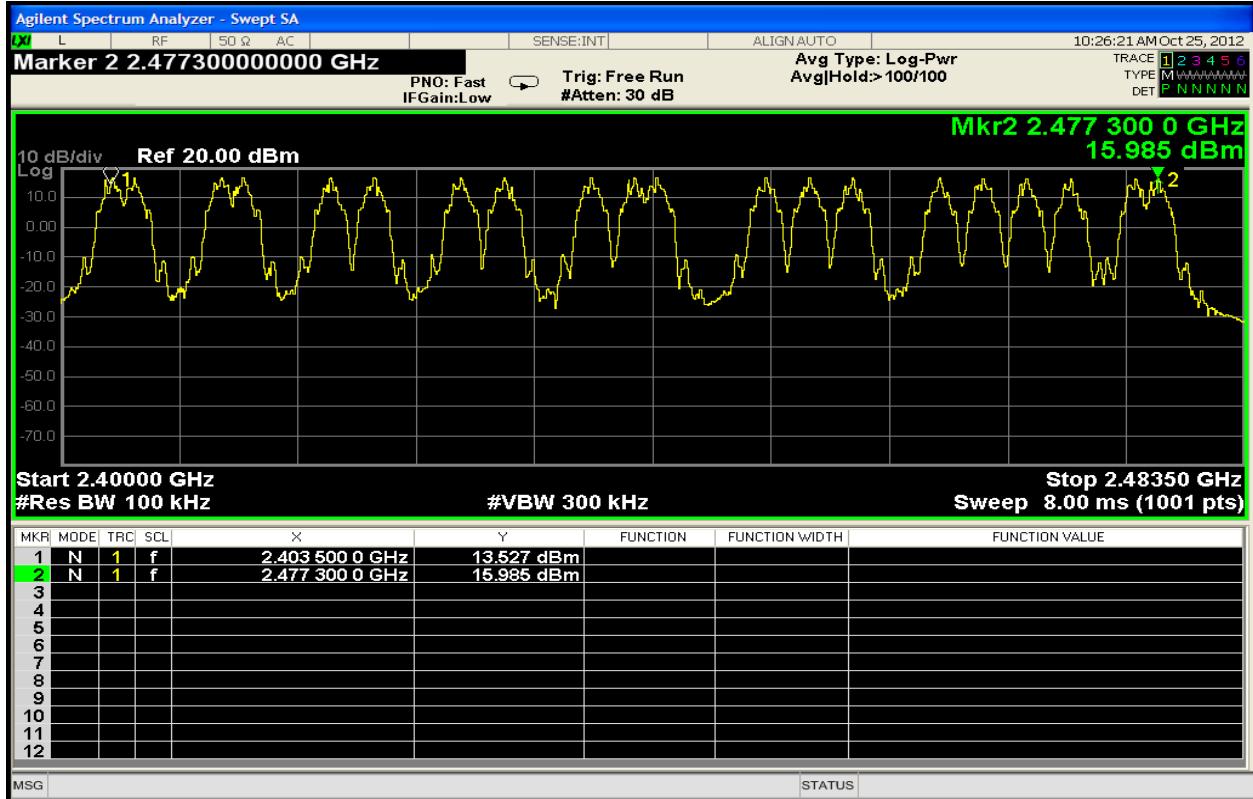

**Test result:** The unit does meet the FCC and RSS-210 requirements.

## 5.6 Dwell Time


**Test Requirement:** FCC Part 15 C section 15.247 and RSS-210

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Method:** DA 00-705

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest, middle and highest channel with different data packet. Compliance test in hopping with EDR mode (3DH1, 3DH3 and 3DH5) and FSK mode as the worst case was found.

**Test Configuration:**

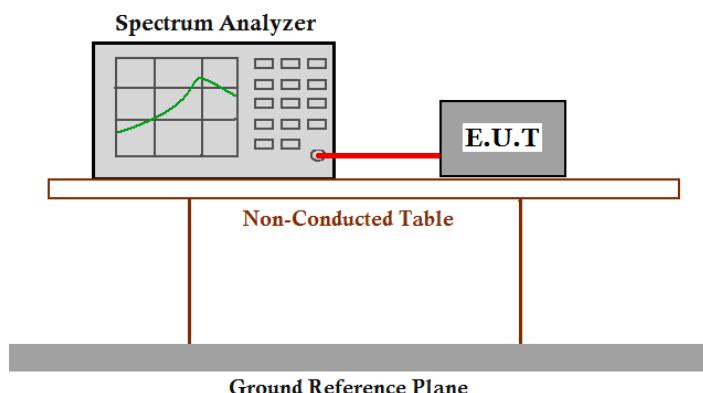

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. centered on a hopping channel;
3. Set RBW = 1 MHz and VBW = 1 MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = View;
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). Repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

**Test Result:****For bluetooth**

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

**1. Channel 0: 2.402GHz**

$$3DH1 \text{ time slot} = 0.41(\text{ms}) * (1600/(2*79)) * 31.6 = 131.2\text{ms}$$

$$3DH3 \text{ time slot} = 1.66 (\text{ms}) * (1600/(4*79)) * 31.6 = 265.6\text{ms}$$

$$3DH5 \text{ time slot} = 2.92 (\text{ms}) * (1600/(6*79)) * 31.6 = 311.5\text{ms}$$

**2. Channel 39: 2.441GHz**

$$3DH1 \text{ time slot} = 0.41 (\text{ms}) * (1600/(2*79)) * 31.6 = 131.2\text{ms}$$

$$3DH3 \text{ time slot} = 1.66 (\text{ms}) * (1600/(4*79)) * 31.6 = 265.6\text{ms}$$

$$3DH5 \text{ time slot} = 2.91 (\text{ms}) * (1600/(6*79)) * 31.6 = 309.3\text{ms}$$

**3. Channel 78: 2.480GHz**

$$3DH1 \text{ time slot} = 0.41 (\text{ms}) * (1600/(2*79)) * 31.6 = 131.2\text{ms}$$

$$3DH3 \text{ time slot} = 1.66 (\text{ms}) * (1600/(4*79)) * 31.6 = 265.6\text{ms}$$

$$3DH5 \text{ time slot} = 2.91 (\text{ms}) * (1600/(6*79)) * 31.6 = 309.3\text{ms}$$

The results are not greater than 0.4 seconds

**For 2.4G FSK wireless module:****Frequency:2403.5MHz**

Mode	Number of transmission in a 8s (20Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
1	20*8=160	0.156	24.96	400

**Frequency:2440.4MHz**

Mode	Number of transmission in a 8s (20Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
1	20*8=160	0.150	24	400

**Frequency:2477.3MHz**

Mode	Number of transmission in a 8s (20Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
1	20*8=160	0.150	24	400


The unit does meet the FCC and RSS-210 requirements.

**For buletooth**


Please refer the graph as below:

1. Lowest channel (2.402 GHz):

(1). 3DH1

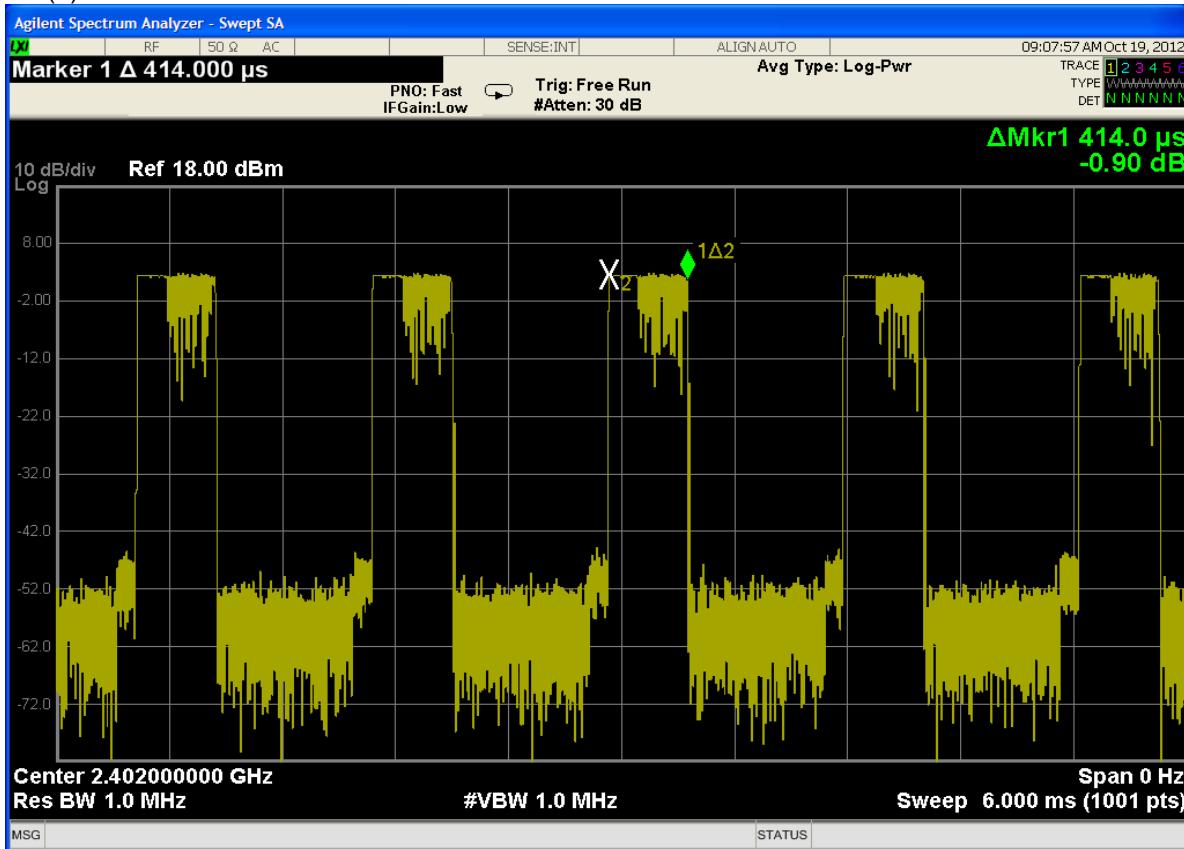

(2) 3DH3

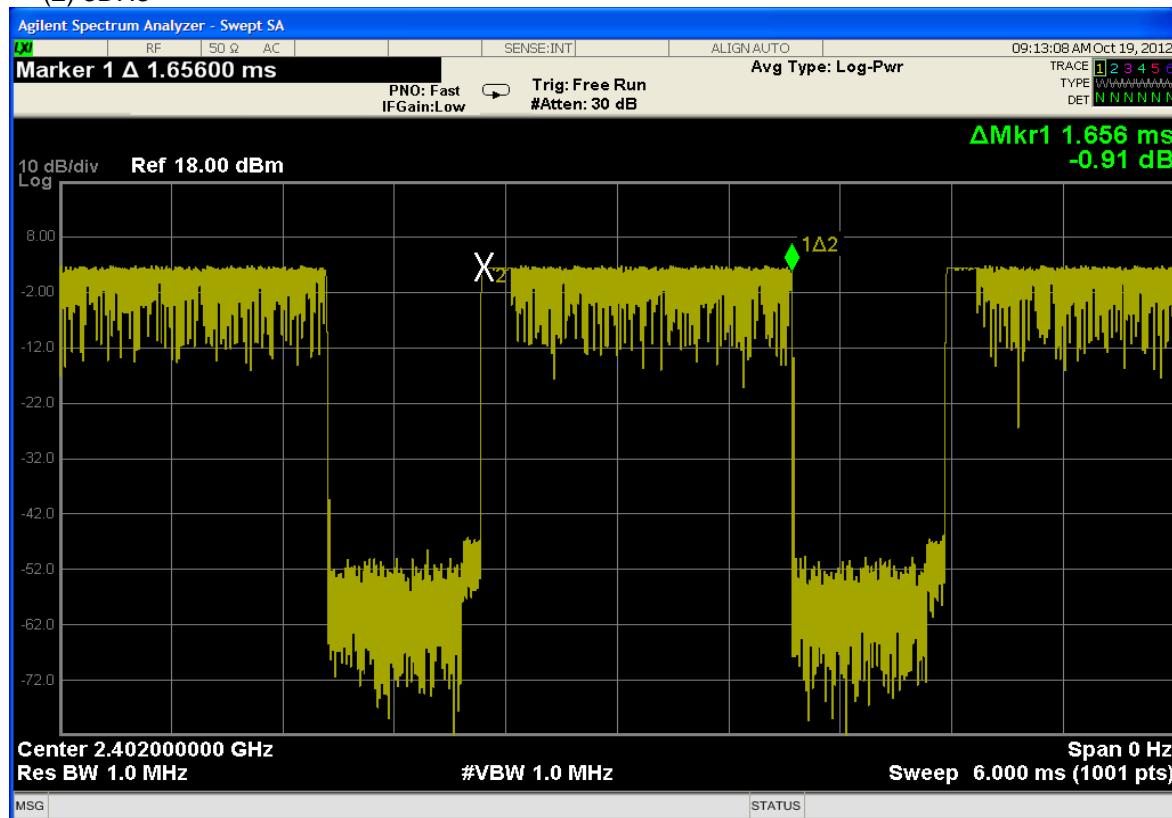

(3) 3DH5




2. Middle channel (2.441 GHz):


(1). 3DH1



(2) 3DH3

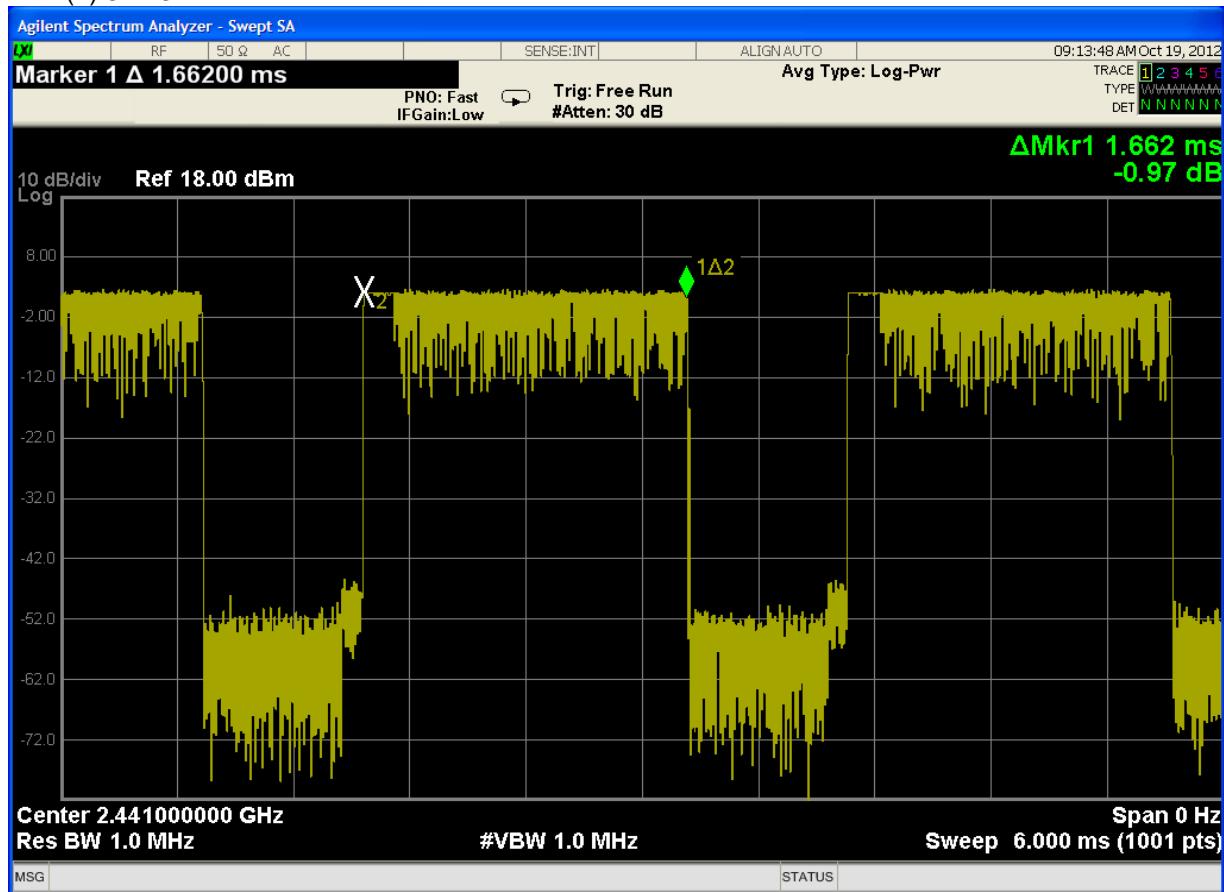


(3) 3DH5

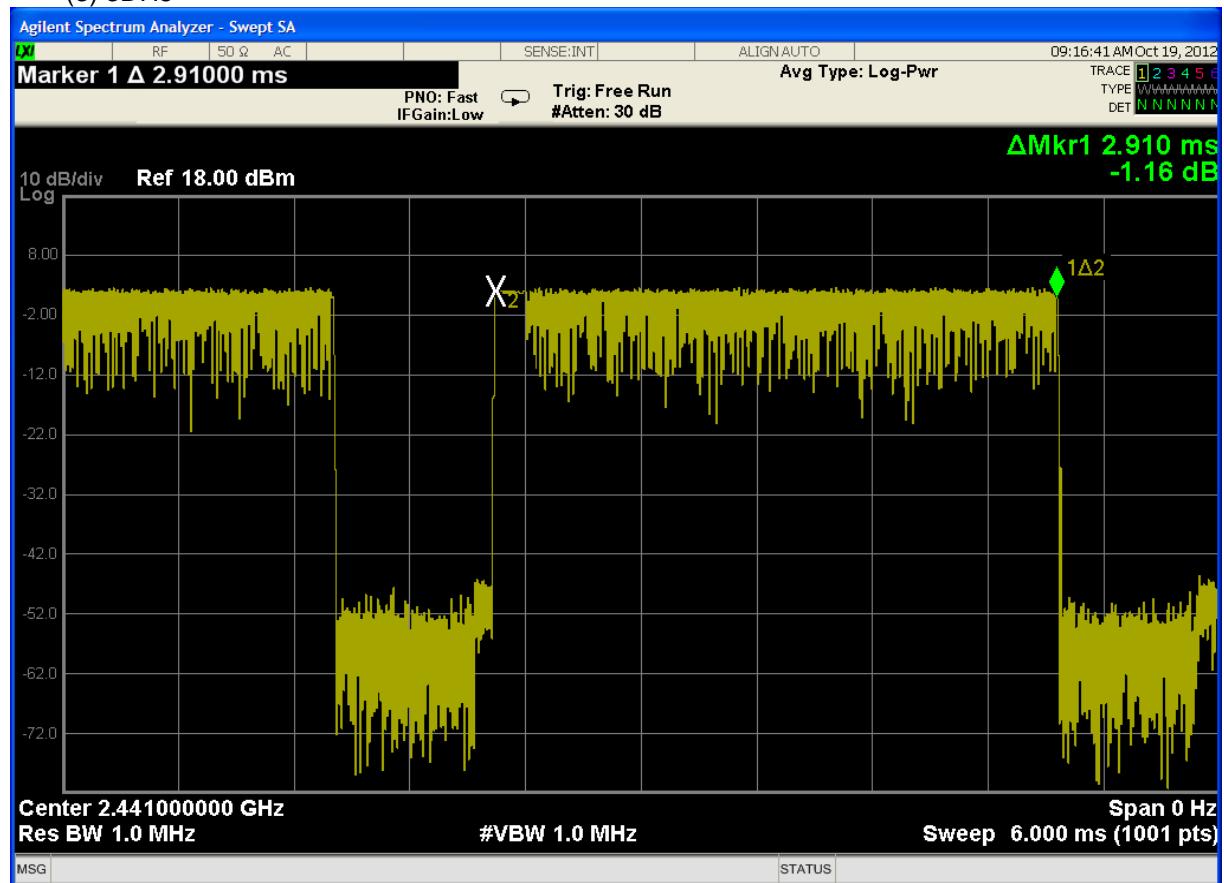


3. Highest channel (2.480 GHz):


(1). 3DH1

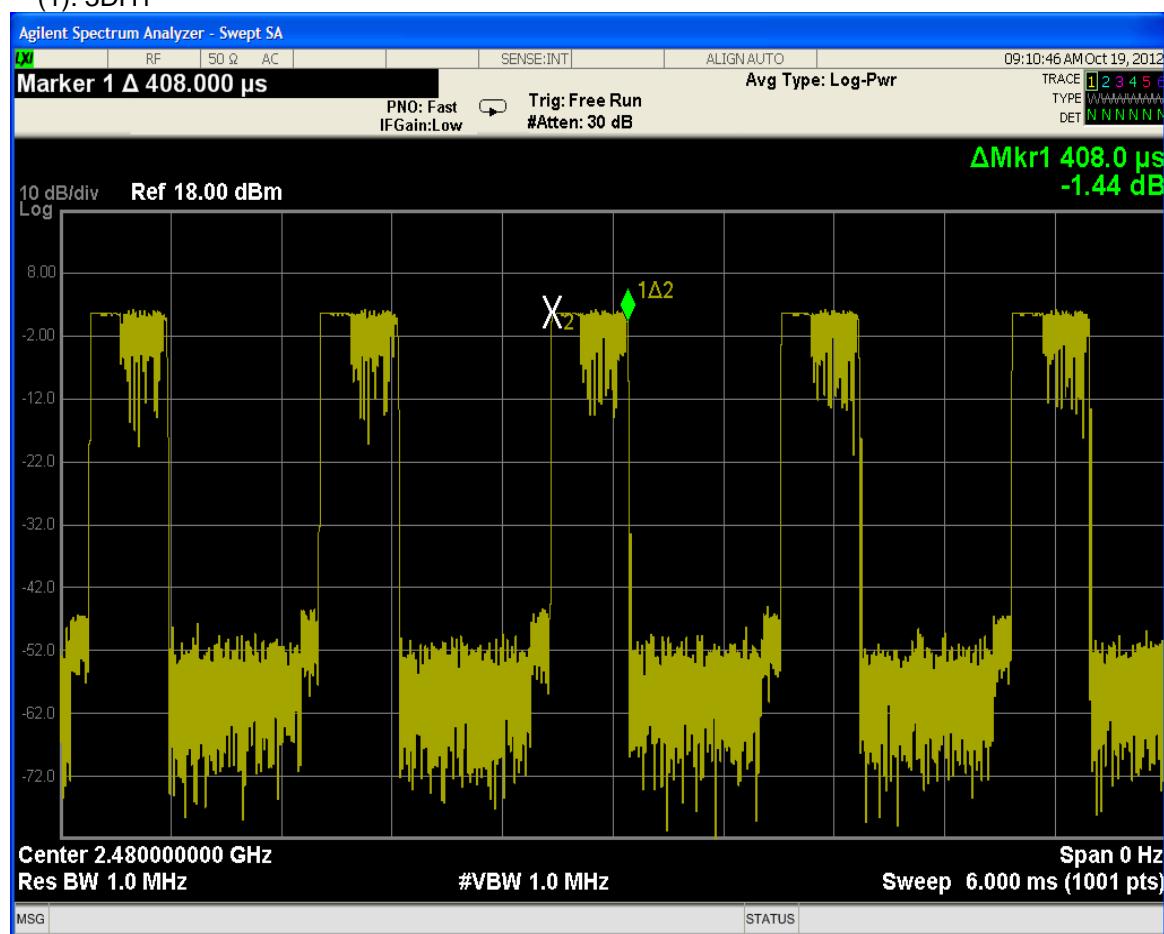

(2) 3DH3

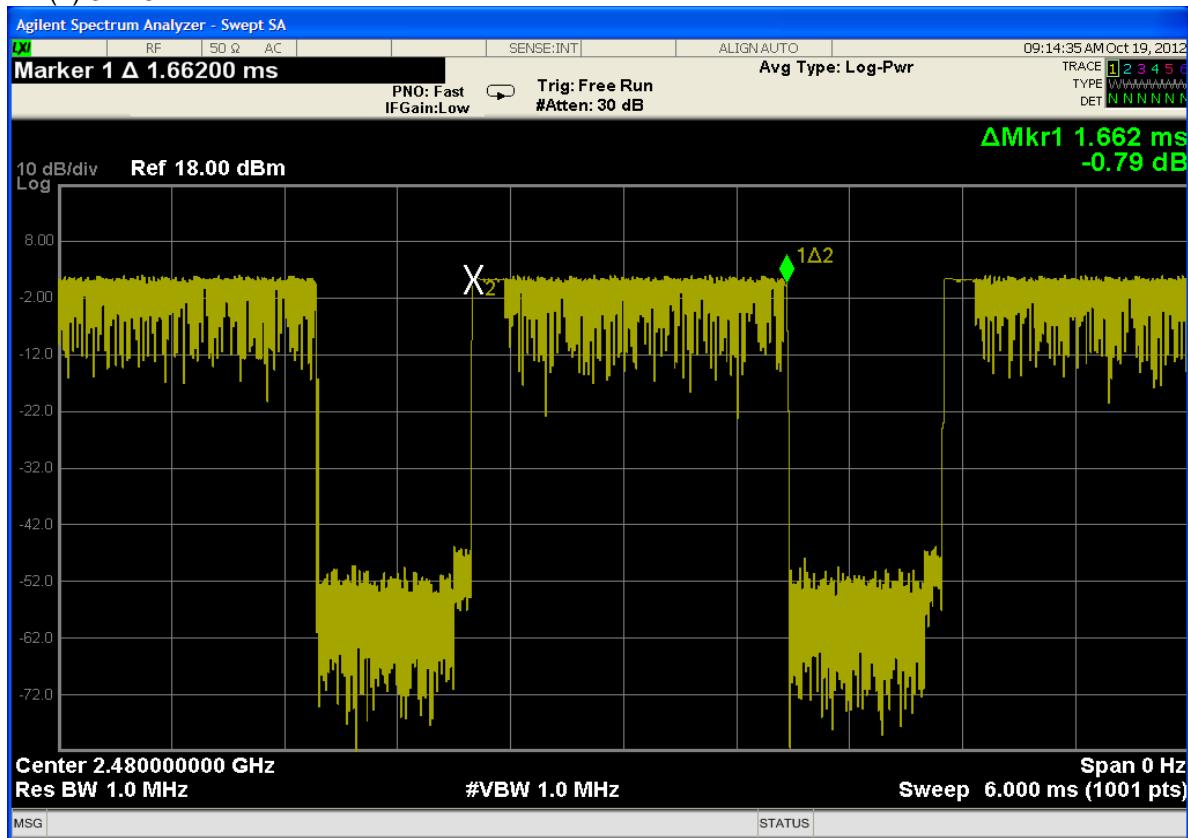



(3) 3DH5

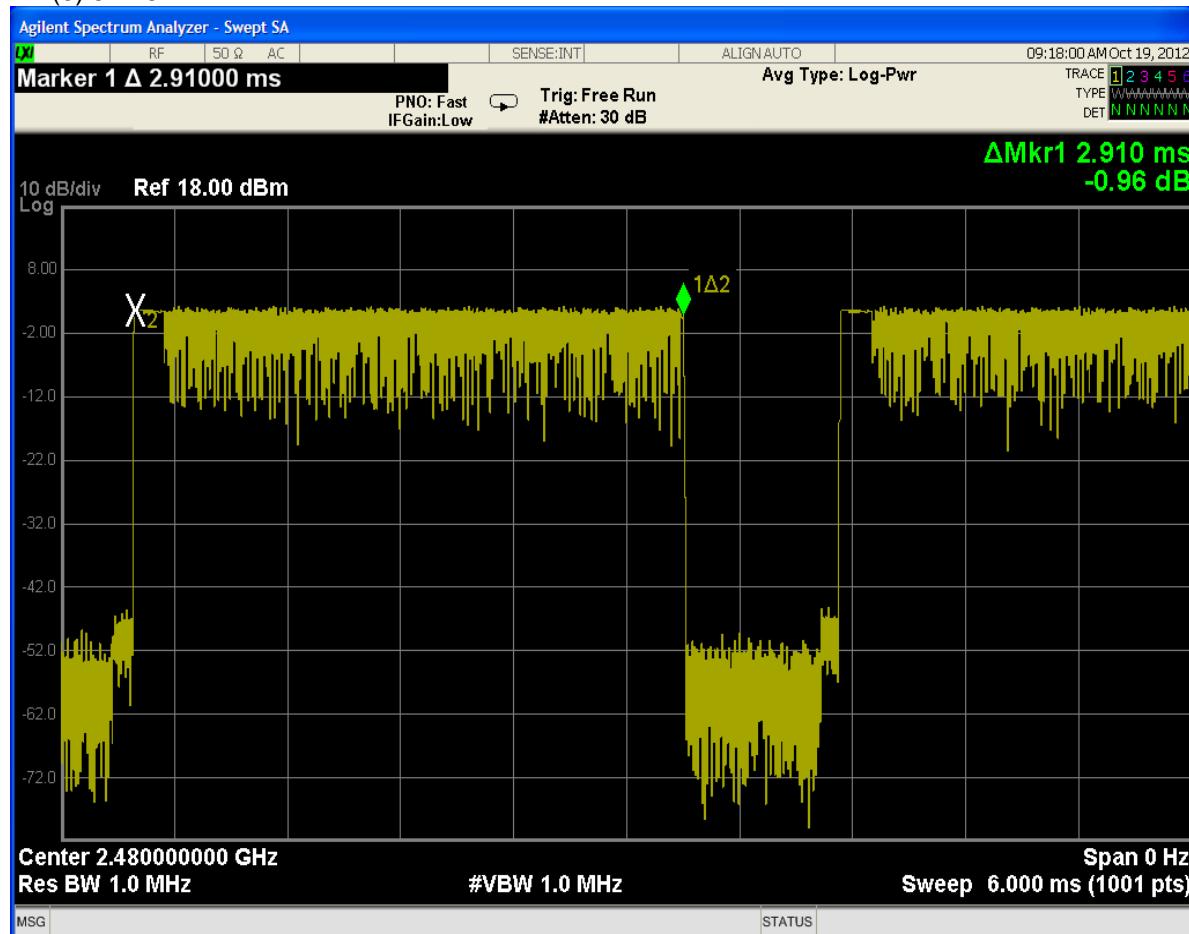


For 2.4G FSK wireless module


4. Lowest channel (2.4035 GHz):

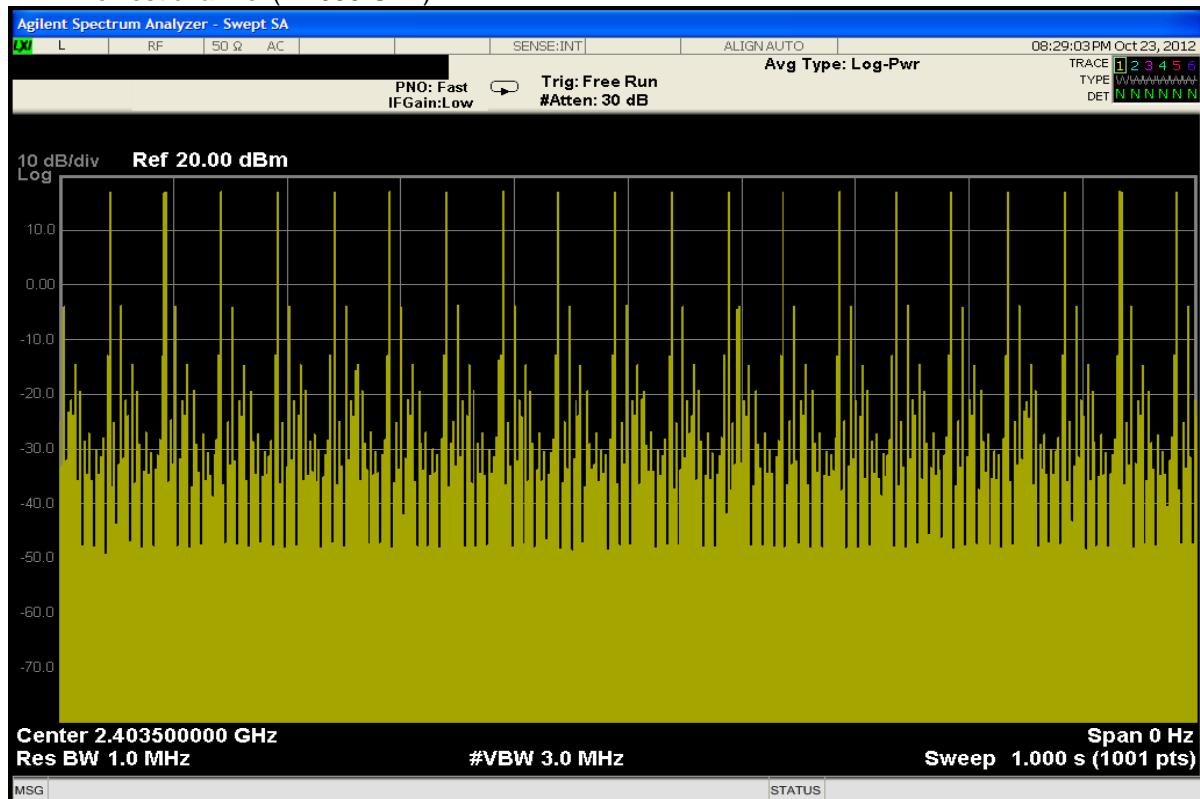

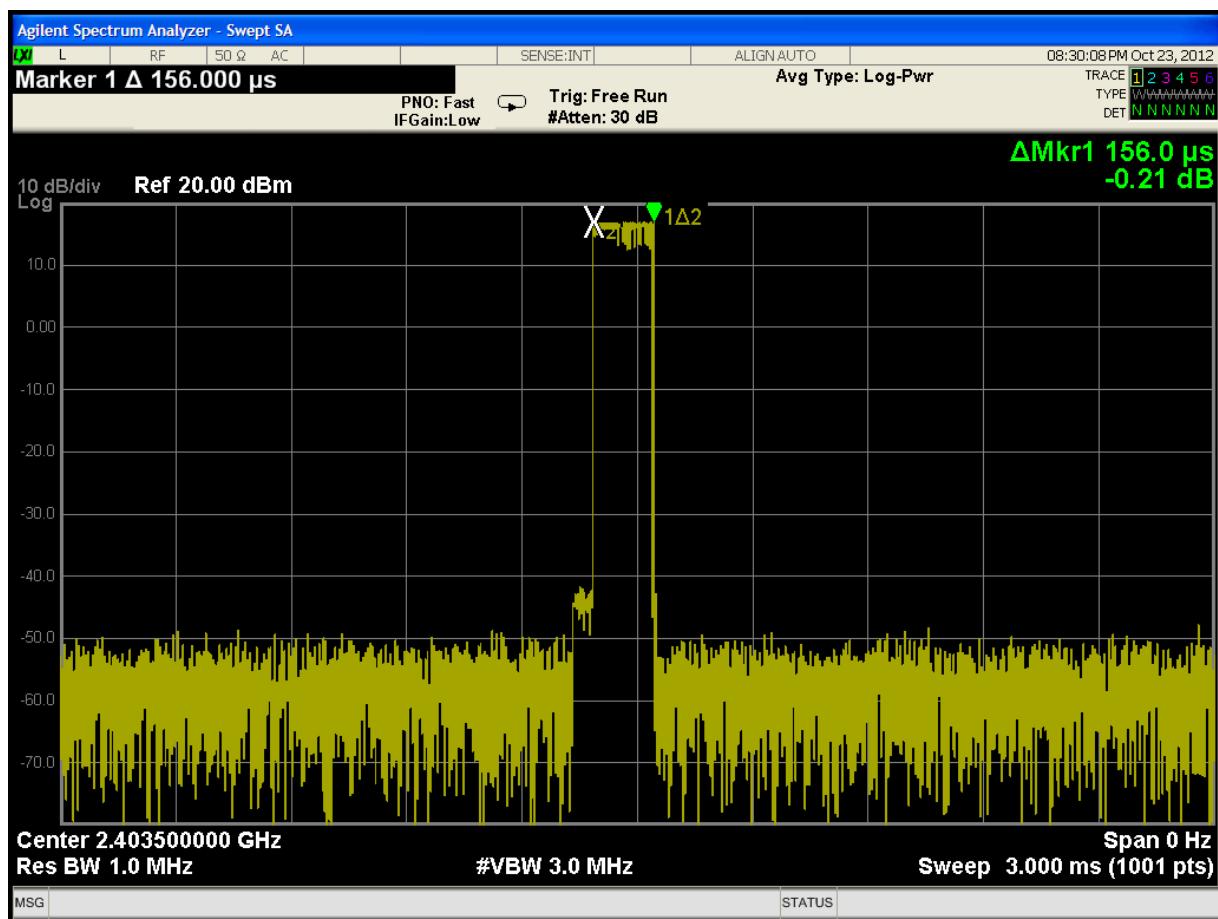



## 5. Middle channel (2.4404 GHz):

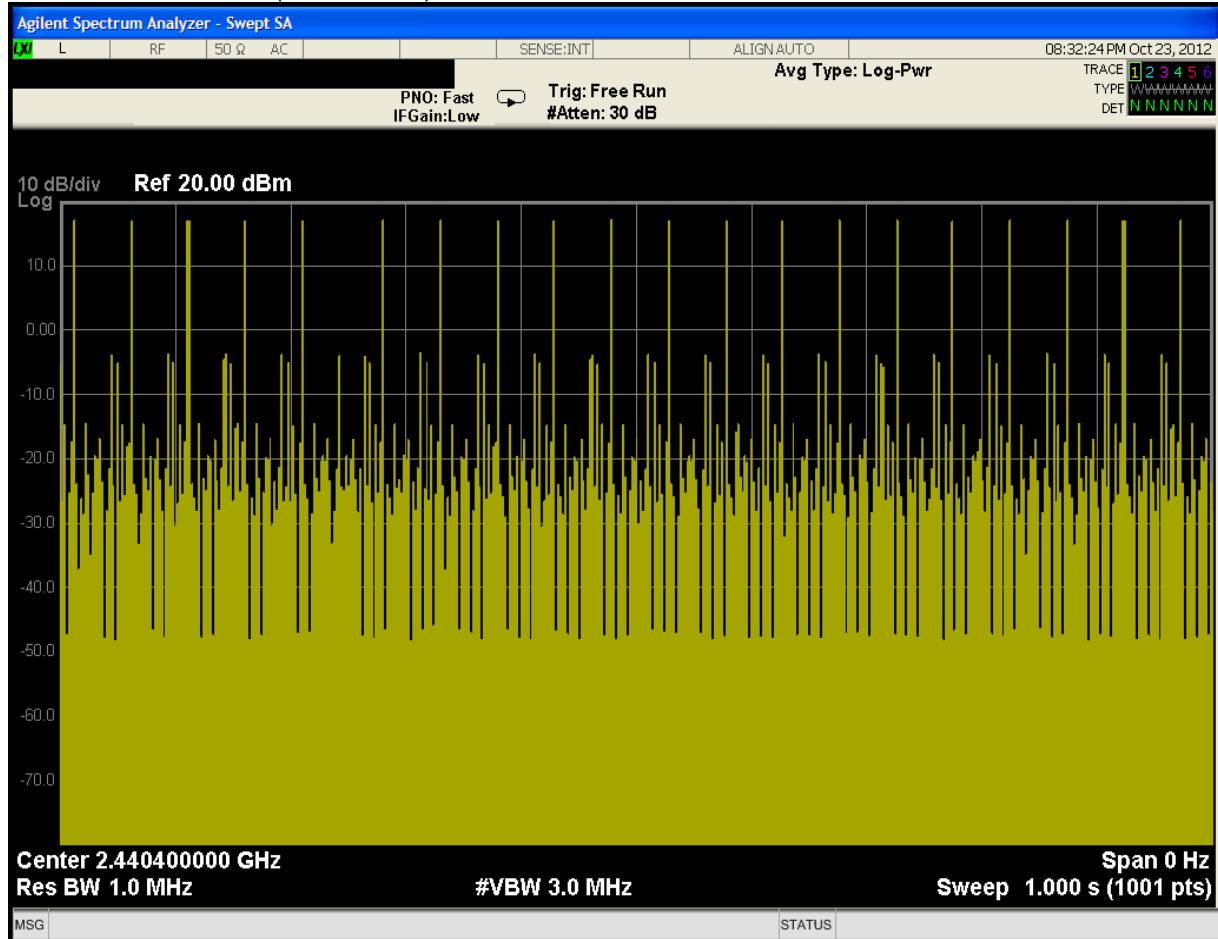

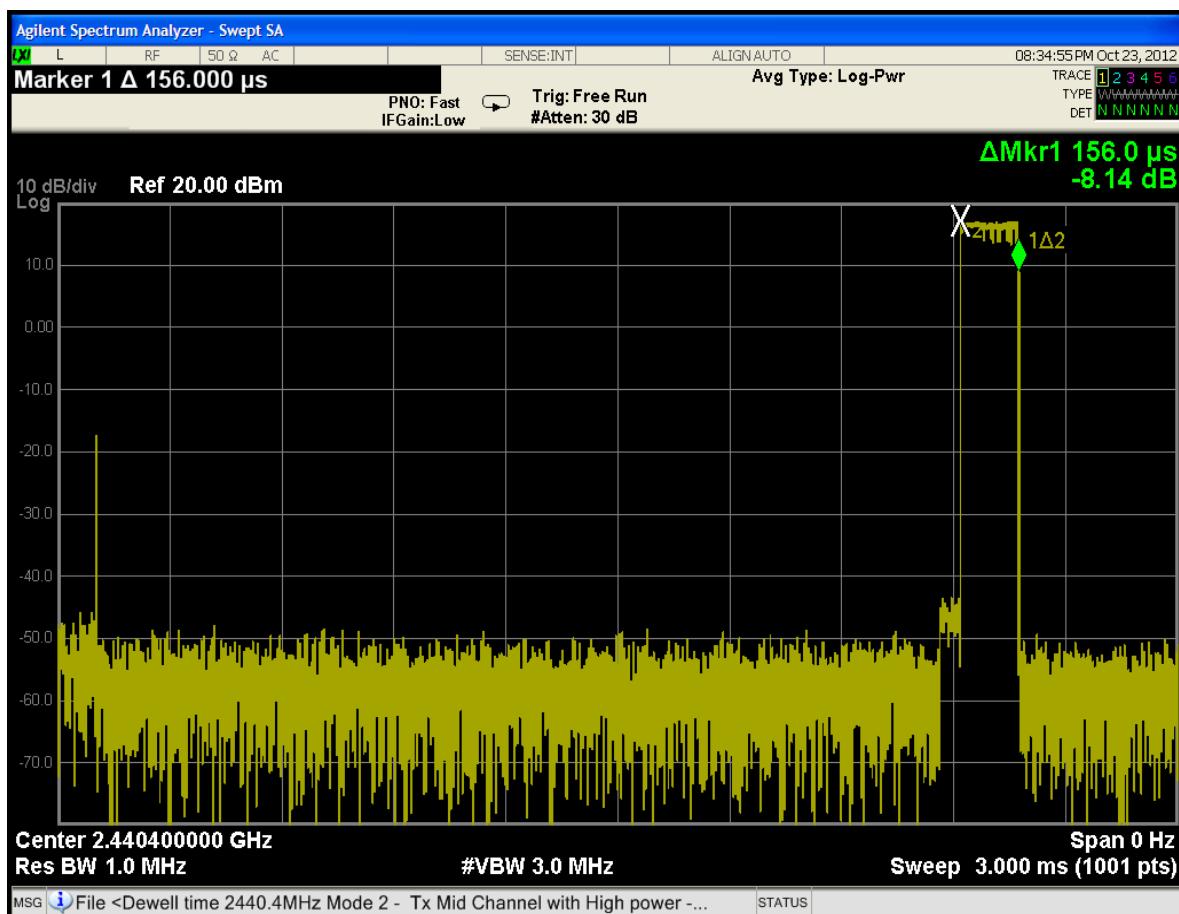

6. Highest channel (2.4773 GHz):

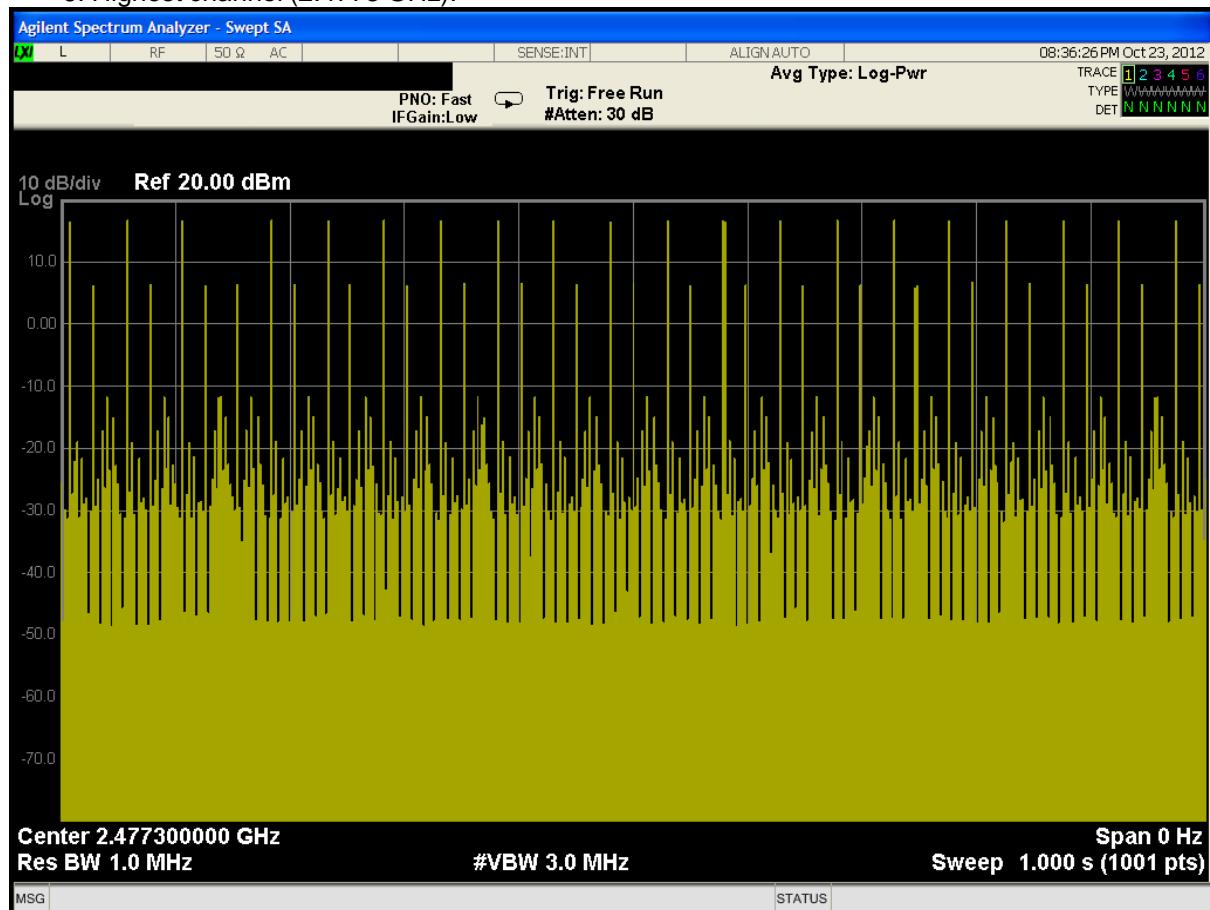

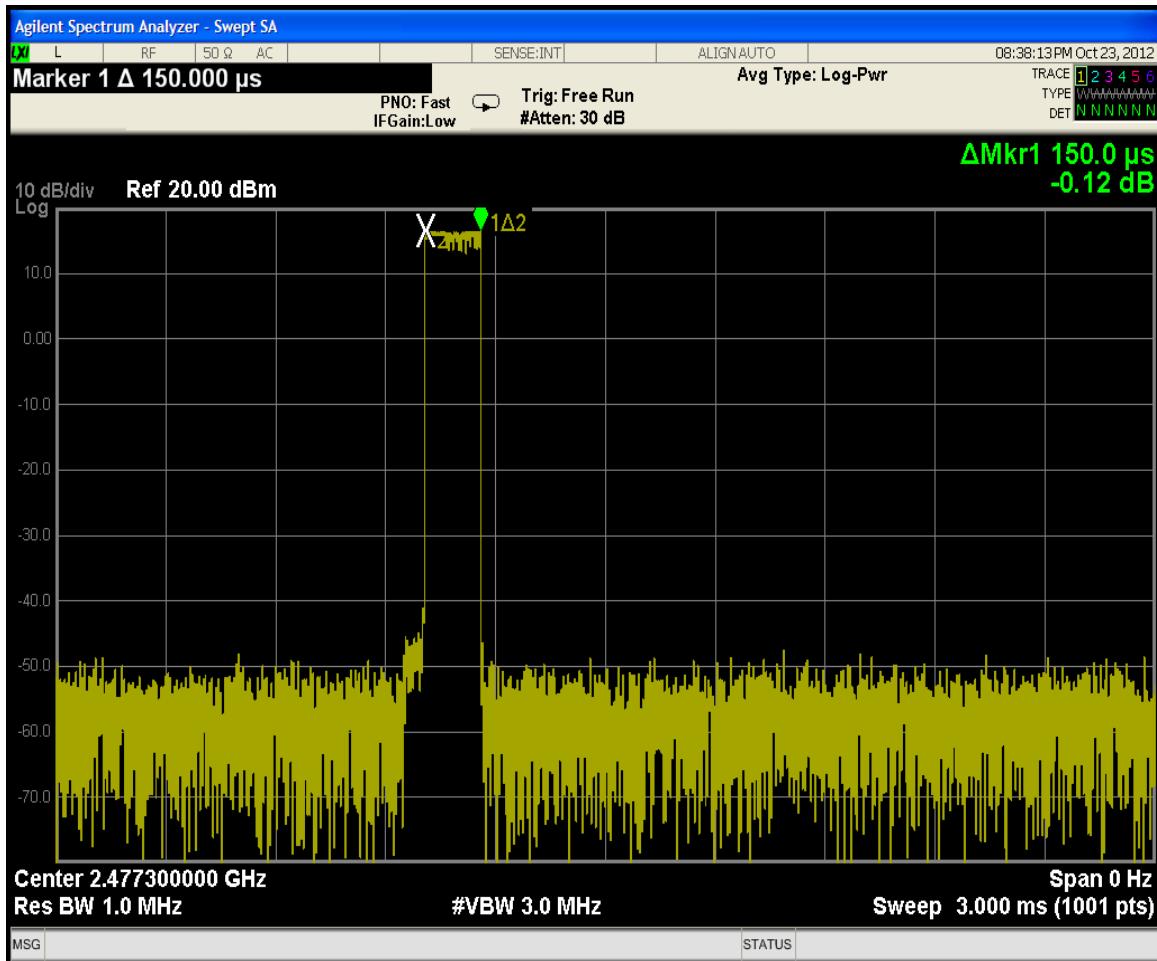

Remark:

In communication data link mode (expect inquiry or page mode) the hopping rate is 1600 per second, the 79 channels will be randomly selected for RF channel, and each channel have equal probability to be selected. The hop selection scheme is defined in Clause 2.6 of Part B of Volume 2 of core specification of Bluetooth.

The Dwell time must be calculated via following formula:

$$\text{Dwell time} = \text{Pulse wide} \times (\text{Hopping rate} / \text{Number of channels}) \times \text{Period}$$

$$\text{Period} = 0.4 \text{ (seconds/channel)} \times 79 \text{ (channel)} = 31.6 \text{ seconds}$$

So

$$\text{Dwell time DH1} = \text{slot time} \times (1600/2/79) \times 31.6$$

$$\text{Dwell time DH3} = \text{slot time} \times (1600/4/79) \times 31.6$$

$$\text{Dwell time DH5} = \text{slot time} \times (1600/6/79) \times 31.6$$

The RF channel will remain fixed for duration of a packet, that means for DH3 packet the RF frequency will remain unchanged during 3 slots (1slot=1/1600=625us), and for DH5 packet the RF frequency will remain unchanged during 5 slots, illustrated the principle as below:

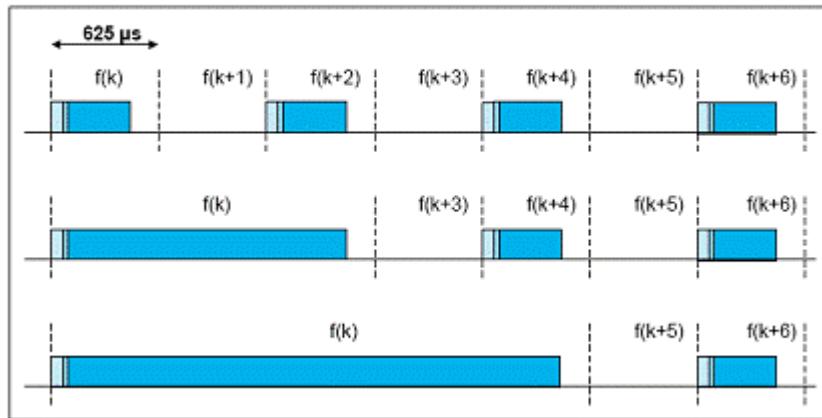


Figure 2.14: Single- and multi-slot packets.

Therefore, in a certain period for different packet types, the quantities of hops (not hopping rate 1600) are different, accurately, the quantity of hops for DH1 is double of DH3's and triple of DH5's. "for DH1 packet, 1 hop in 1 slot; for DH3 packet,  $\frac{1}{2}$  hop in 1 slot; for DH5 packet,  $\frac{1}{3}$  hop in 1 slot.", explained as below:

From the illustrated hopping scheme:

For DH1, in two slots, there are two hops, i.e.  $f(k)$  in Slot(k),  $f(k+1)$  in Slot(k+1), means DH1 1 hop in 1 slot;

For DH3, in four slots, there are two hops, i.e.  $f(k)$  in Slot(k) & Slot(k+1) & Slot(k+2),  $f(k+3)$  in

Slot(k+3), means DH3 2 hops in four slots  $\rightarrow \frac{1}{2}$  hop in 1 slot;

For DH5, in six slots, there are two hops, i.e.  $f(k)$  in Slot(k) & Slot(k+1) & Slot(k+2) & Slot(k+3) & Slot(k+4),  $f(k+5)$  in Slot(k+5), means DH3 2 hops in six slots  $\rightarrow \frac{1}{3}$  hop in 1 slot.

The Hopping rate in the formula should not be fixed value, for DH1, it is  $1600/2$ ; for DH3, it is  $1600/4$ ; for DH5, it is  $1600/6$ .

To calculate Dwell time of data transmission of Bluetooth system, the worst case is for Bluetooth PICONET that contains two devices only (although Bluetooth PICONET can support up to eight devices), and for Bluetooth data transmission, after device A sending a packet to device B, device A must get response packet from device B to continue data transmission;

For DH1 packet: assume device A is EUT, the worst case is after device A sending a DH1 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 1 time slot for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is half of 1600, i.e. 800 hops per second for EUT;

For DH3 packet: assume device A is EUT, the worst case is after device A sending a DH3 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 3 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is quarter of 1600, i.e. 400 hops per second for EUT;

For DH5 packet: assume device A is EUT, the worst case is after device A sending a DH5 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 5 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is sixth of 1600, i.e.  $1600/6=266.7$  hops per second for EUT;

## 5.7 Maximum Peak Output Power

**Test Requirement:** FCC Part 15 C section 15.247 and RSS-210  
(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


Refer to the result "Hopping channel number" of this document. The 1 watt (30.0 dBm) limit applies.

**Test Method:** ANSI C63.10: Clause 6.10 & DA 00-705

**Test Limit:**

**Test mode:** Pre-test the EUT in continuous transmitting mode at the lowest, middle and highest channel with different data packet. Compliance test in continuous transmitting mode with normal (DH5), EDR mode (3DH5) and FSK mode as the worst case was found.

**Test Configuration:**

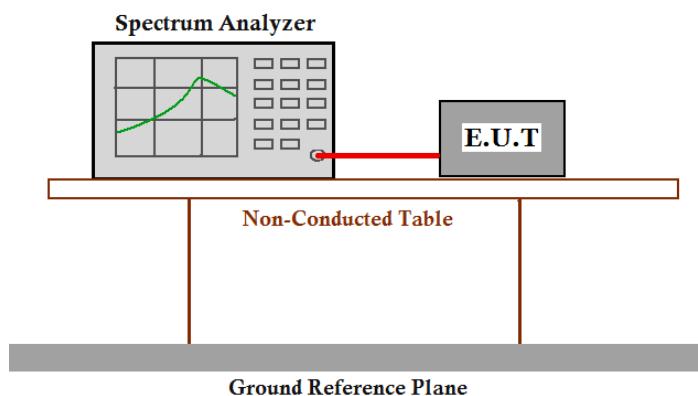

**Test Procedure:**


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2 MHz. VBW = 2 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

<b>Test Result: (For Bluetooth)</b>				
<b>Normal mode:</b>				
Test Channel	Fundamenta l Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	4.935	30.0	Pass
Middle	2441	4.791	30.0	Pass
Highest	2480	4.480	30.0	Pass
<b>EDR mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	4.935	30.0	Pass
Middle	2441	4.825	30.0	Pass
Highest	2480	4.509	30.0	Pass
<b>Remark:</b> cable lose=1.0dB				
<b>Test result:</b> The unit does meet the FCC and RSS-210 requirements.				
<b>Test result plot as follows:</b>				
<b>Test Result: (For 2.4G FSK wireless module)</b>				
<b>FSK mode:</b>				
Test Channel	Fundamenta l Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	18.114	20.96	Pass
Middle	2441	18.077	20.96	Pass
Highest	2480	17.795	20.96	Pass
<b>Remark:</b> cable lose=1.0dB				
<b>Test result:</b> The unit does meet the FCC and RSS-210 requirements.				
<b>Test result plot as follows:</b>				

For bluetooth



Normal mode:



Lowest Channel:


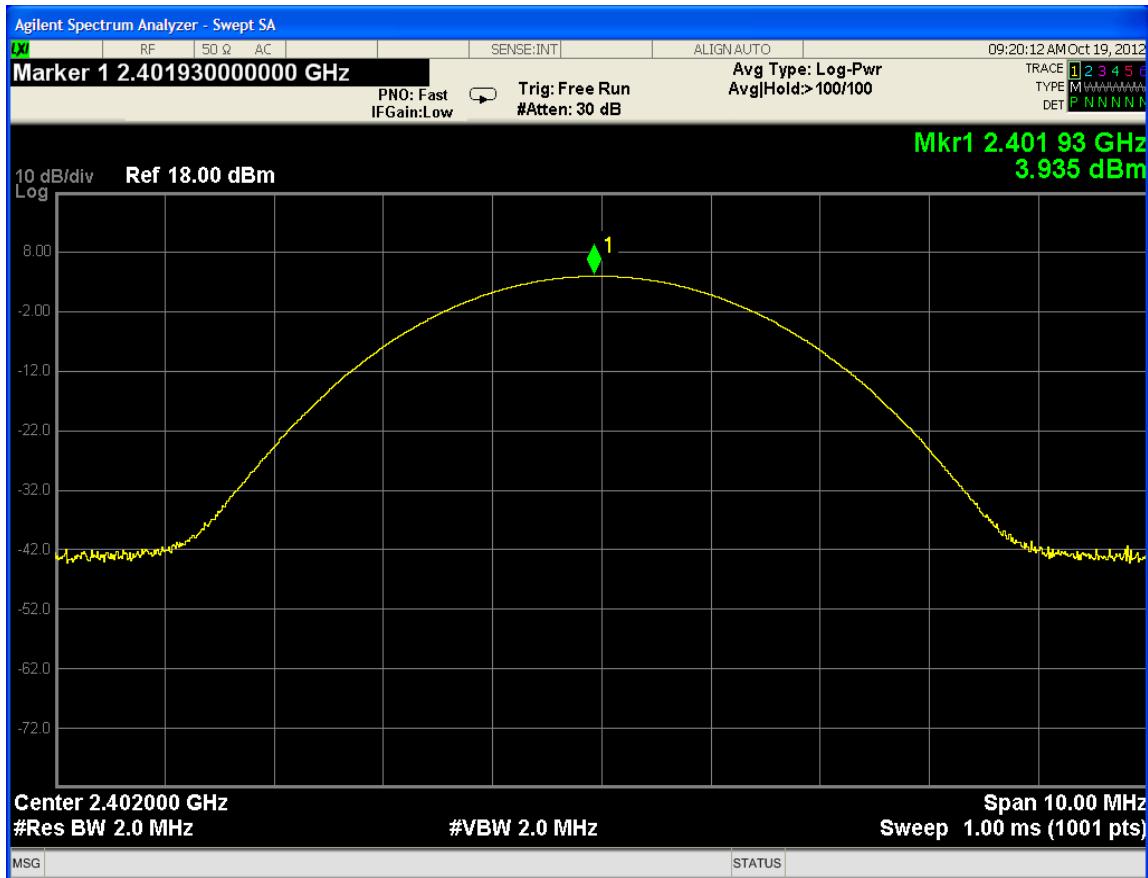



Middle Channel:

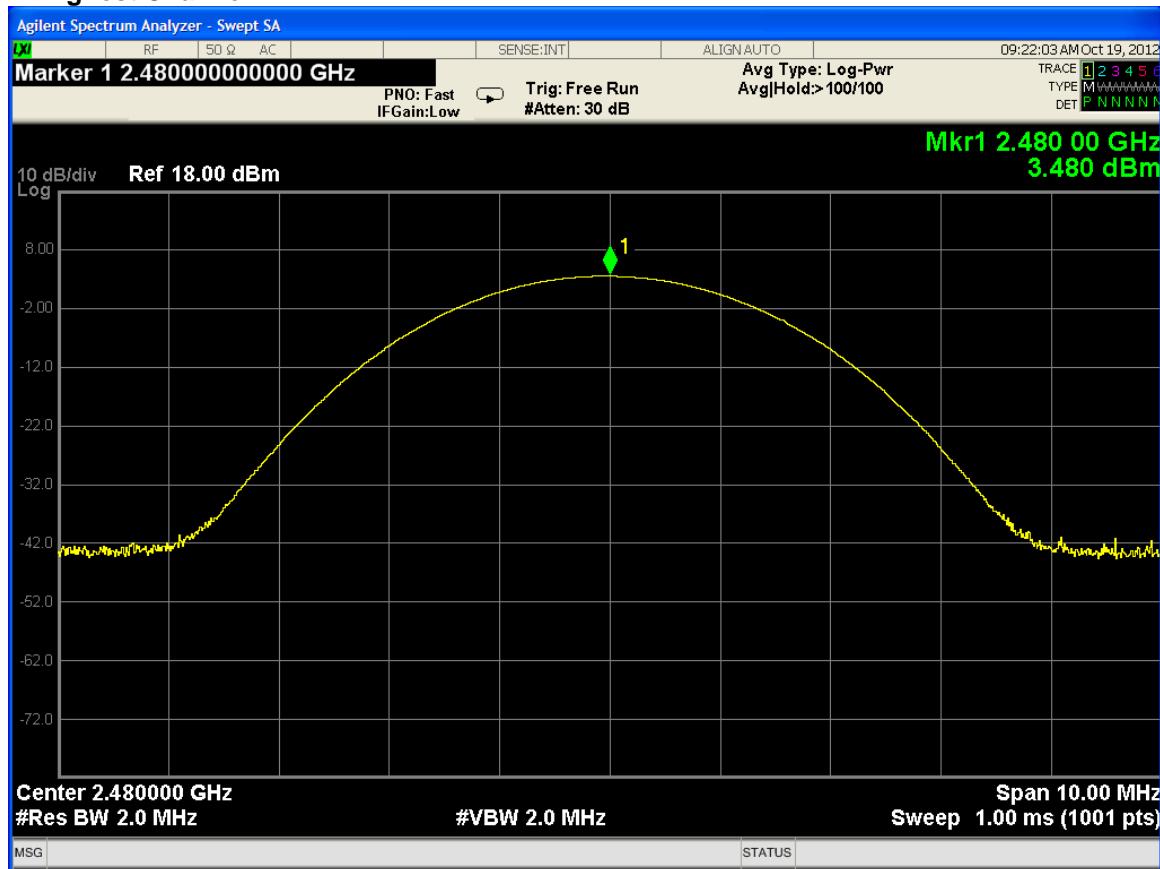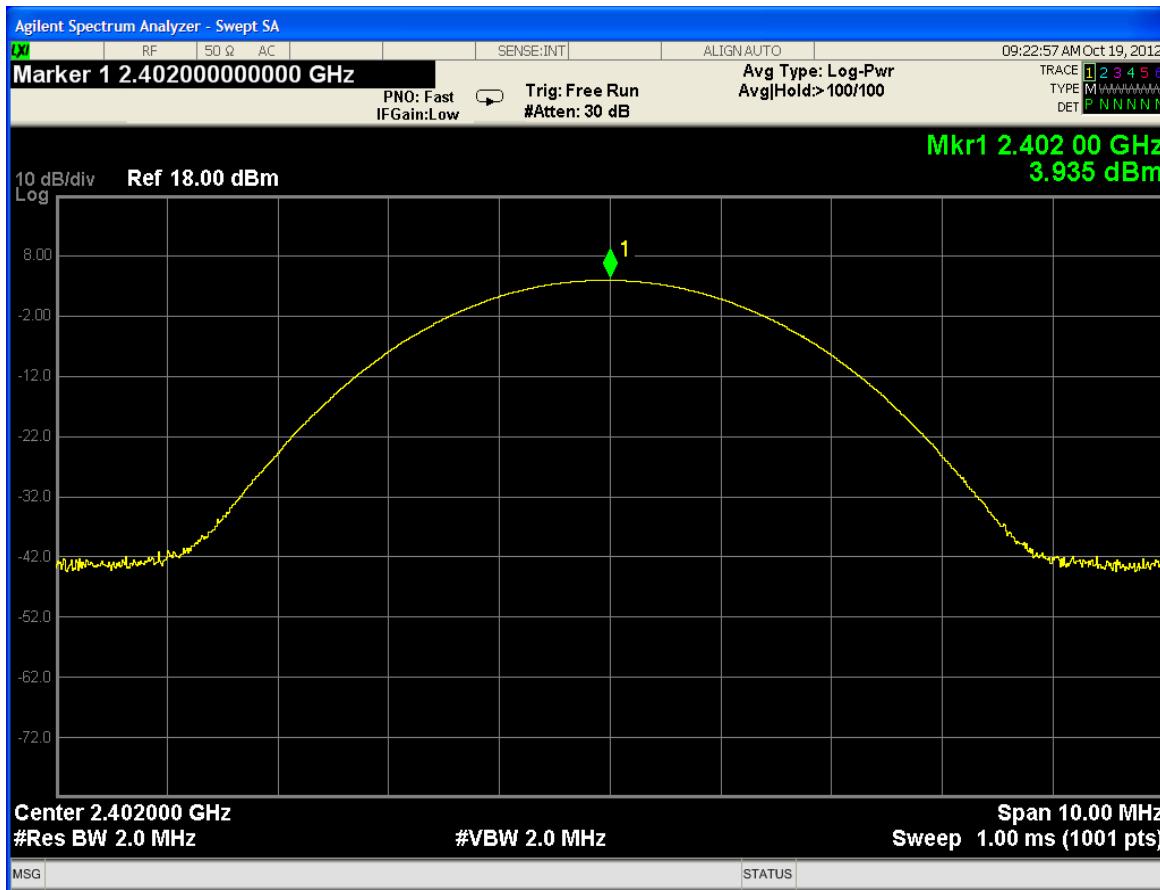

**Highest Channel:****EDR mode:****Lowest Channel:**

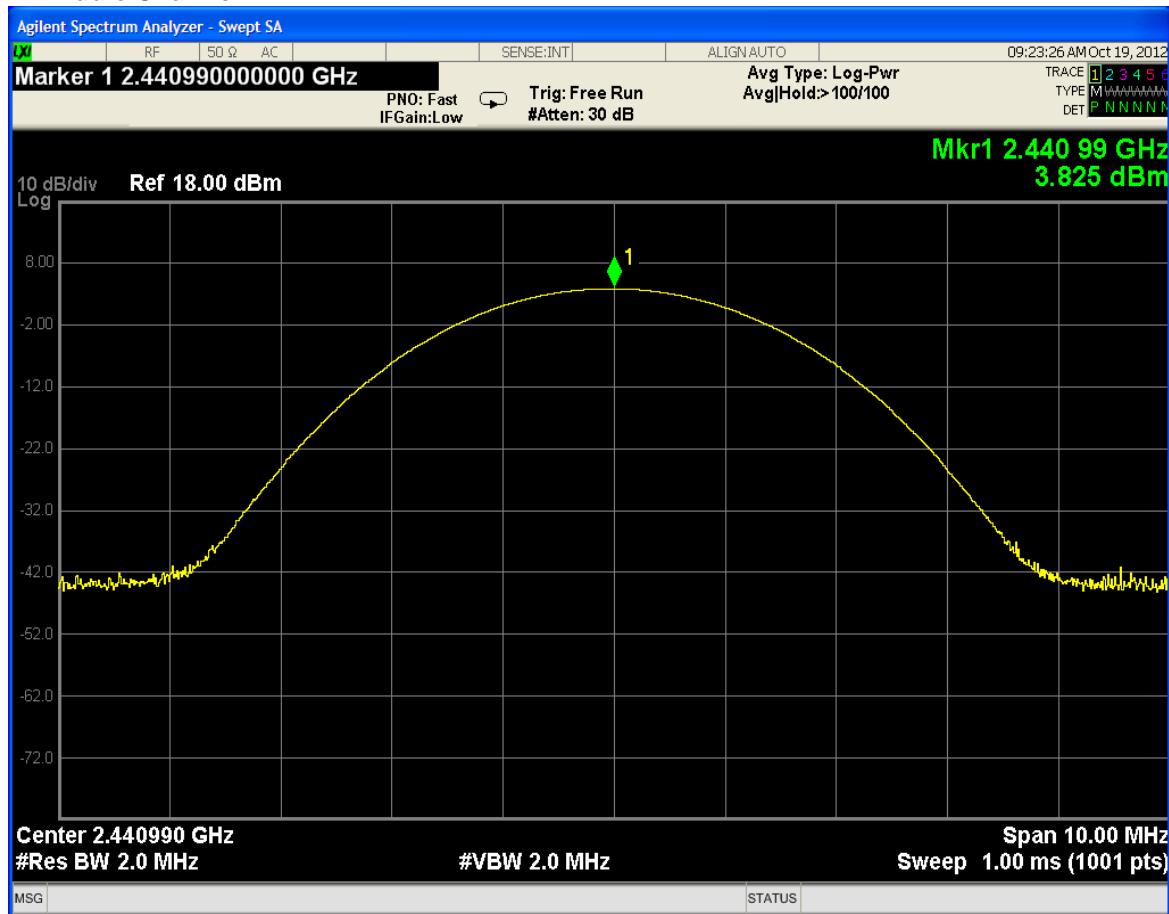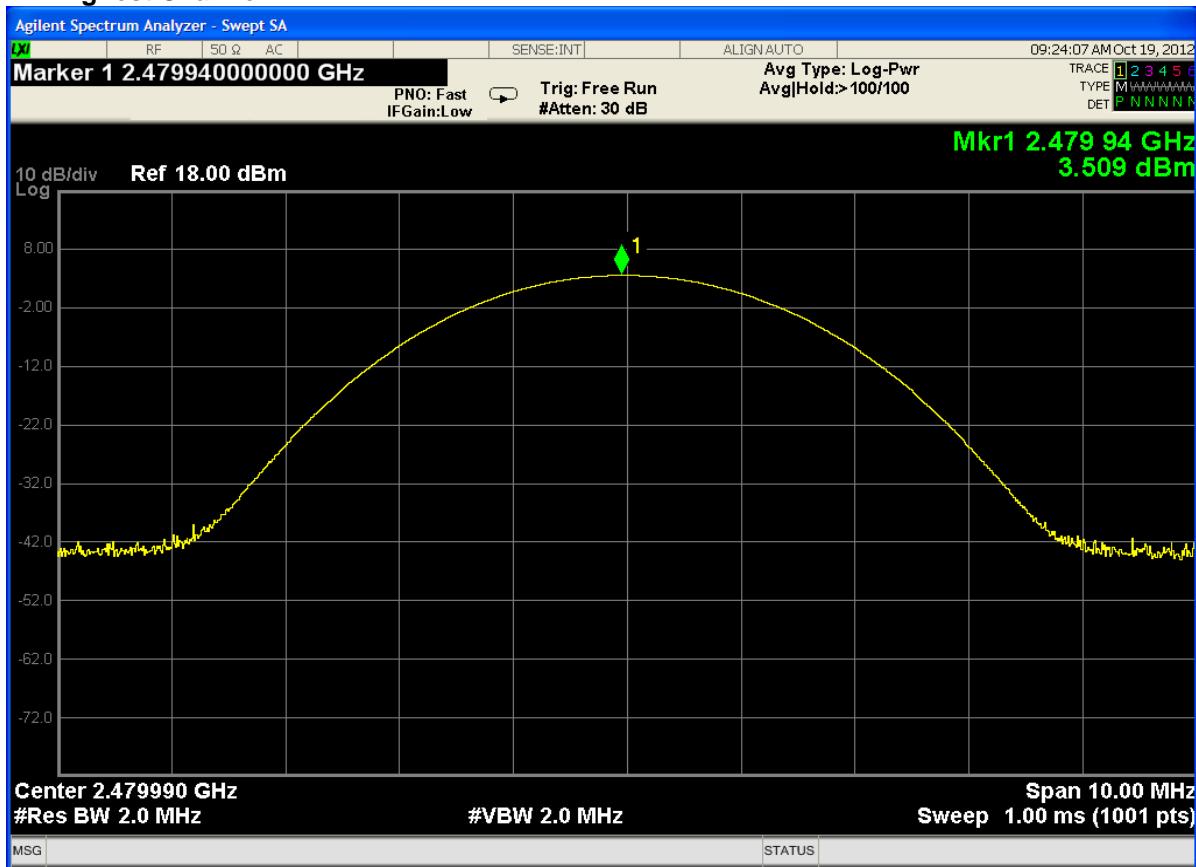**Middle Channel:****Highest Channel:**

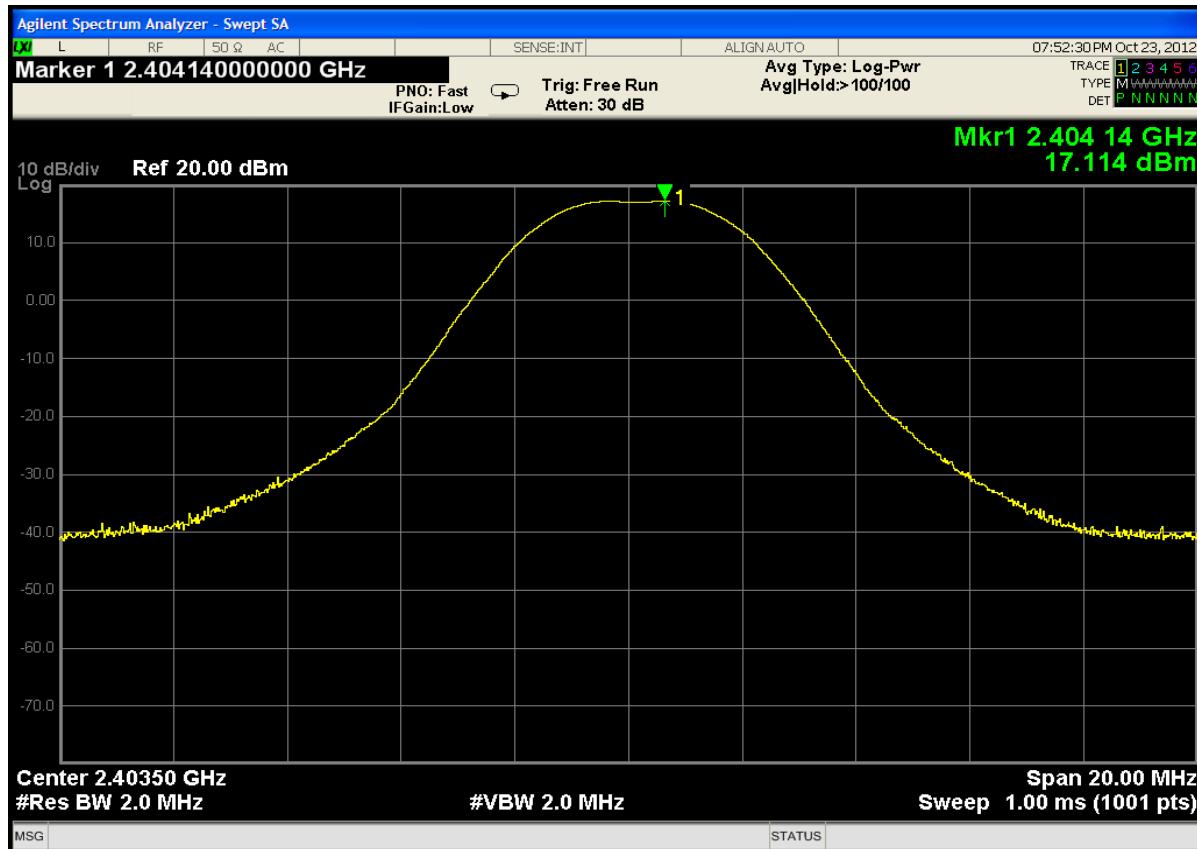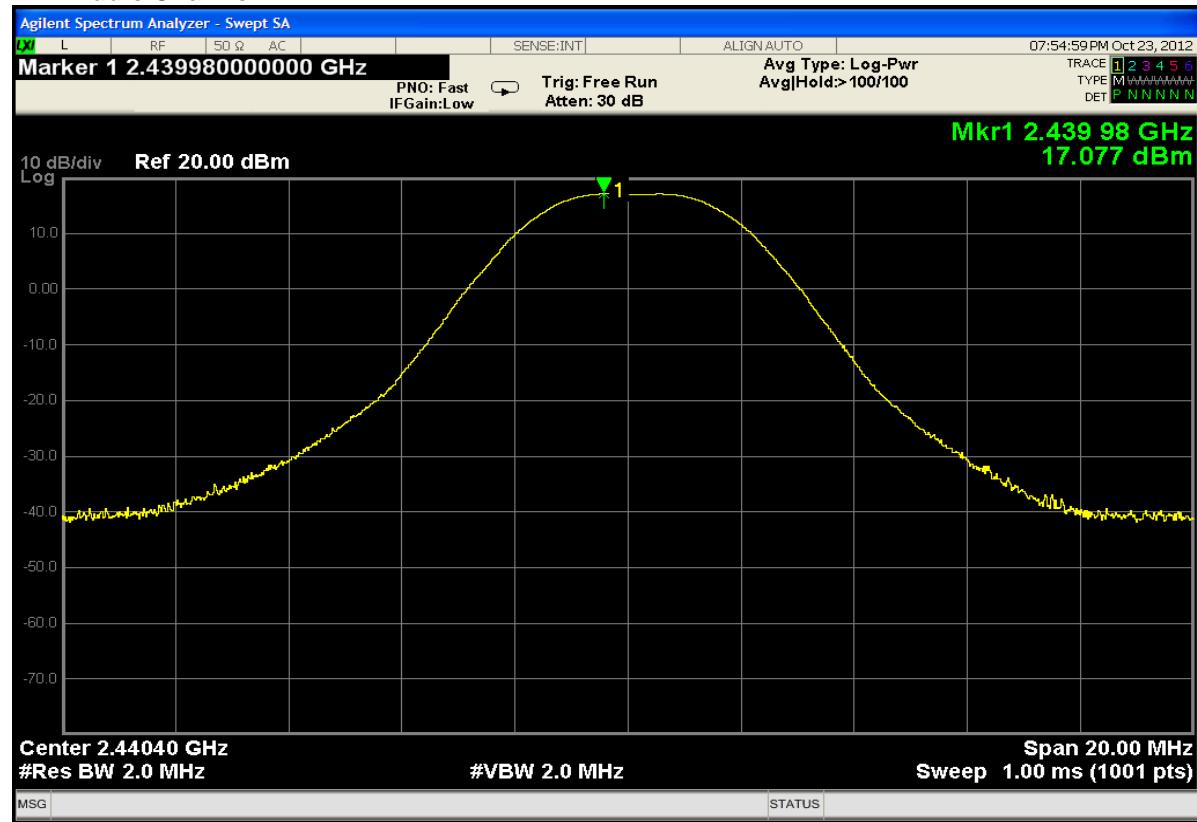**For 2.4G FSK wireless module****FSK mode:****Lowest Channel:****Middle Channel:**

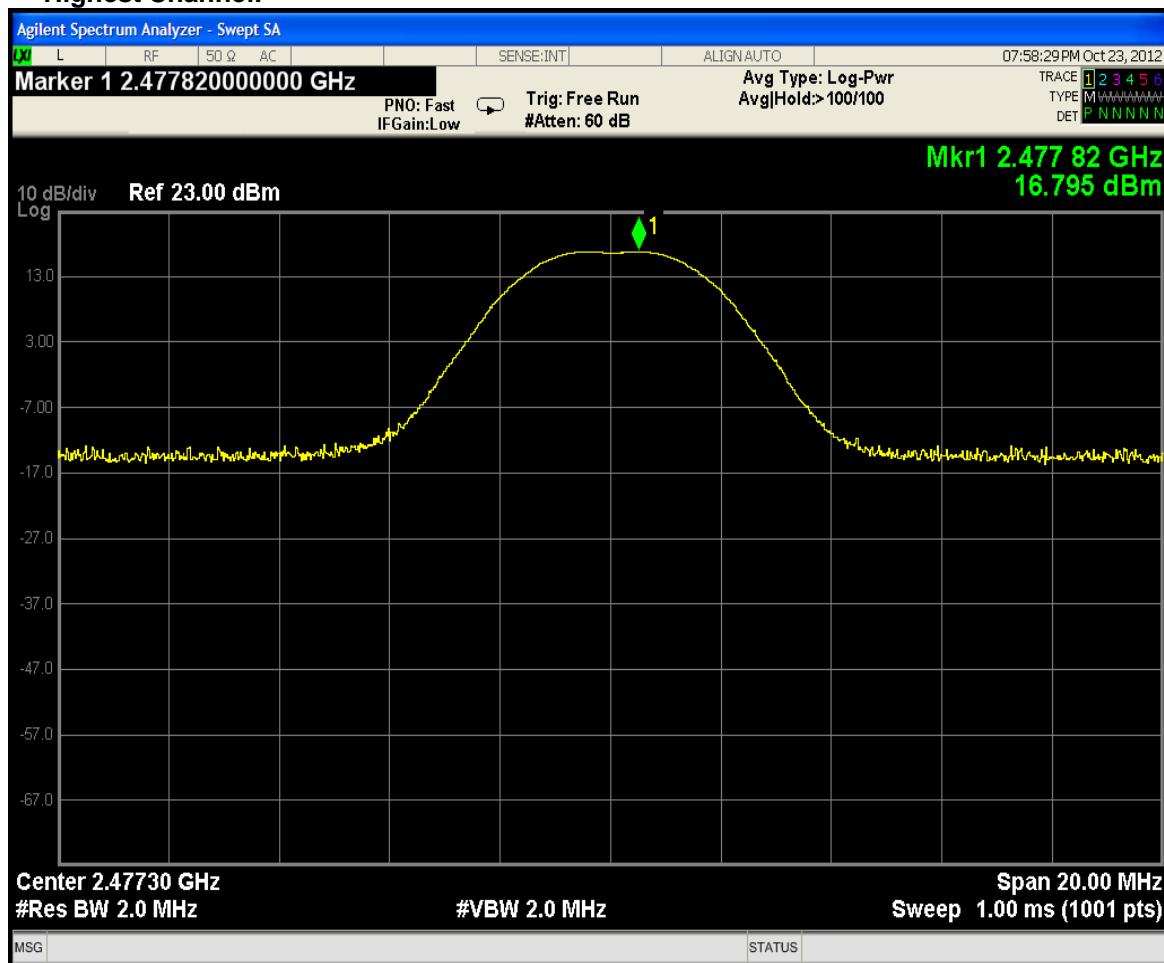**Highest Channel:**

## 5.8 Conducted Spurious Emissions


**Test Requirement:** FCC Part15 C section 15.247 and RSS-210

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

**Test Method:** ANSI C63.10: Clause 6.7 & DA 00-705

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest, middle and highest channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) and FSK mode as the worst case was found.

**Test Configuration:**

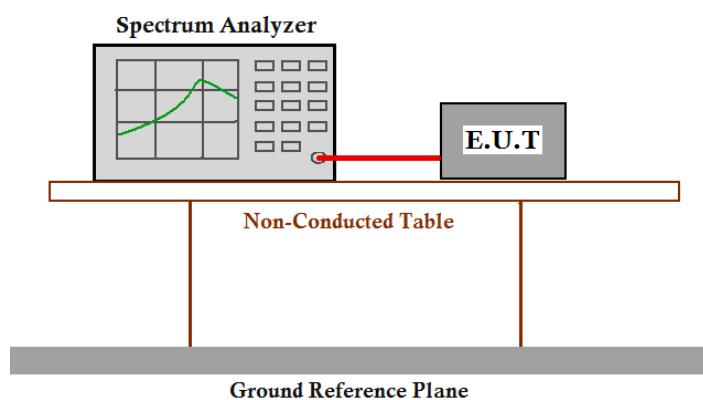

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak (Max. hold).

For bluetooth

Test result plot as follows:  
Lowest Channel:



Middle Channel



**Highest channel**

For 2.4G FSK wireless module

Test result plot as follows:

**Lowest Channel:**

## Middle Channel



## Highest channel




## 5.9 Radiated Spurious Emissions


<b>Test Requirement:</b>	FCC Part15 C section 15.247 and RSS-210  (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
<b>Test Method:</b>	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705
<b>Test Status:</b>	Pre-test the EUT in continuous transmitting mode at the lowest, middle and highest channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) and FSK mode as the worst case was found.
<b>Detector:</b>	<p>For PK value:</p> <p>RBW = 1 MHz for <math>f \geq 1</math> GHz, 100 kHz for <math>f &lt; 1</math> GHz, 9kHz for &lt;30MHz</p> <p>VBW <math>\geq</math> RBW</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p> <p>For AV value:</p> <p>RBW = 1 MHz for <math>f \geq 1</math> GHz, 100 kHz for <math>f &lt; 1</math> GHz, 9kHz for &lt;30MHz</p> <p>VBW = 10 Hz</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p>
15.209 Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz

**Test Configuration:**


- 1) 9kHz to 30MHz emissions:

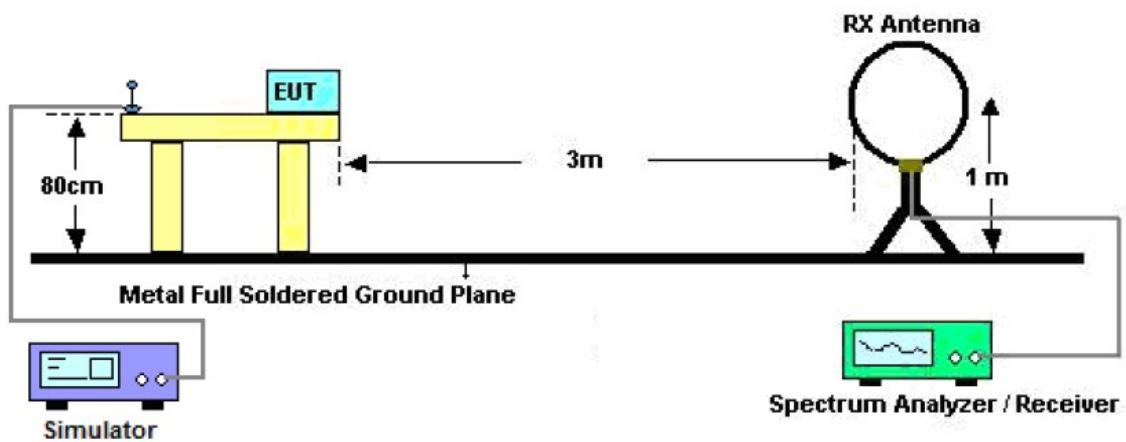

- 2) 30 MHz to 1 GHz emissions:

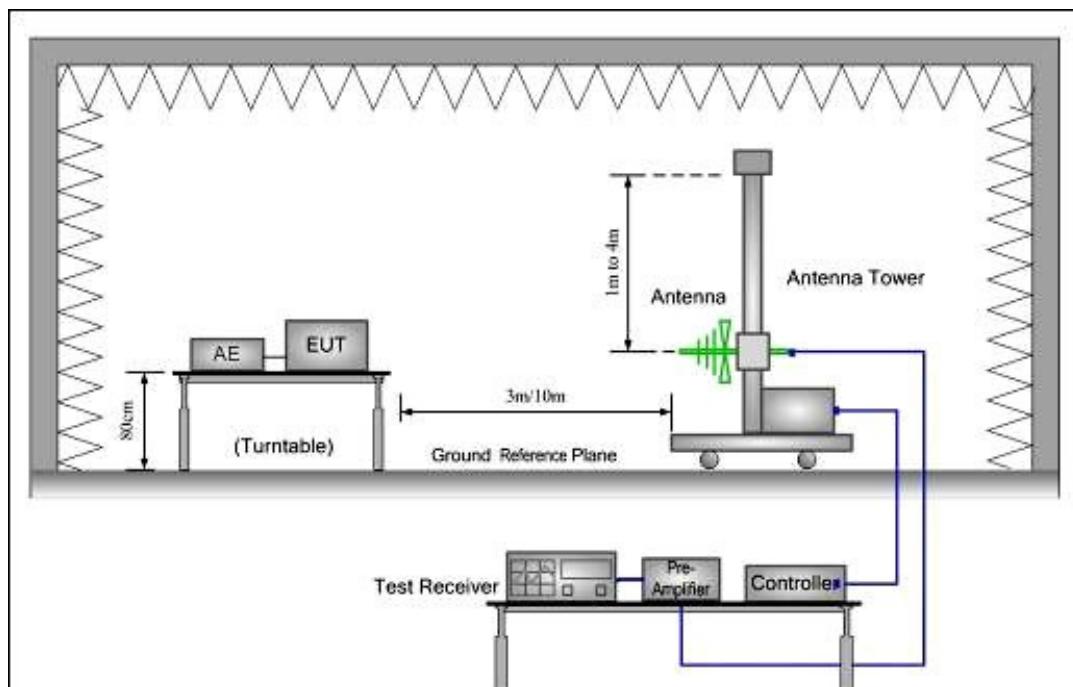

## 3) 1 GHz to 40 GHz emissions:

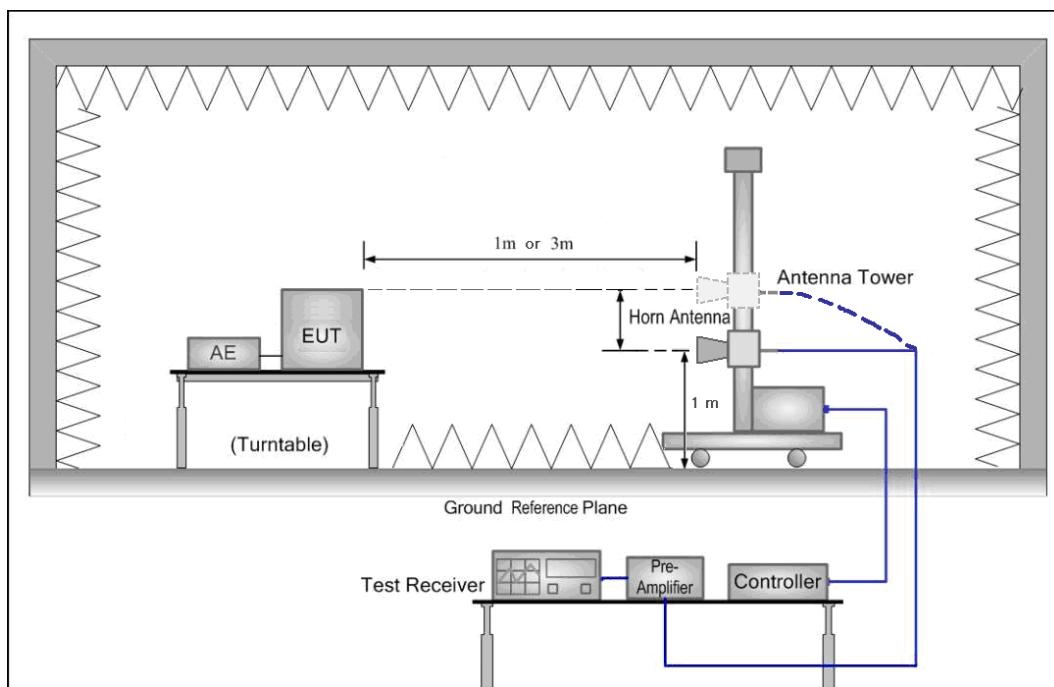

**Test Procedure:** The procedure used was ANSI Standard C63.4:2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.

Submit this data.

### 5.9.1 Harmonic and other spurious emissions

For Soundbar (Power supply: JQH, type: NER-SPM00-217) (Bluetooth mode)

#### Test at low Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

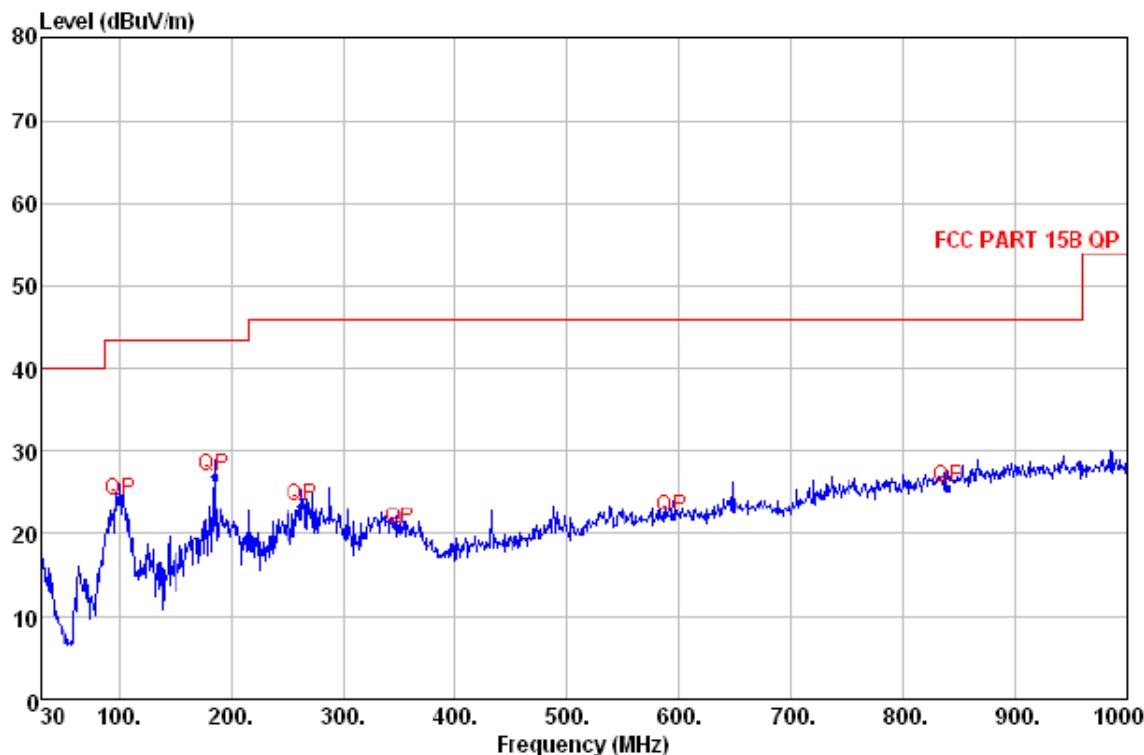

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna Factor	Cable Loss dB/m	Limit Line dBuV/m	Margin A/pos dB	T/pos cm deg
1	100.810	24.08	QP	8.67	1.18	43.50	-19.42	100 158
2	185.200	26.99	QP	8.32	1.64	43.50	-16.51	100 172
3	263.770	23.36	QP	12.42	1.98	46.00	-22.64	100 192
4	351.070	20.53	QP	13.95	2.28	46.00	-25.47	200 87
5	594.540	22.12	QP	20.02	3.04	46.00	-23.88	200 251
6	839.950	25.65	QP	22.90	3.66	46.00	-20.35	200 209


Level=Read Level + Antenna Factor + Cable Loss

## Test at low Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

## Vertical:

## Peak scan

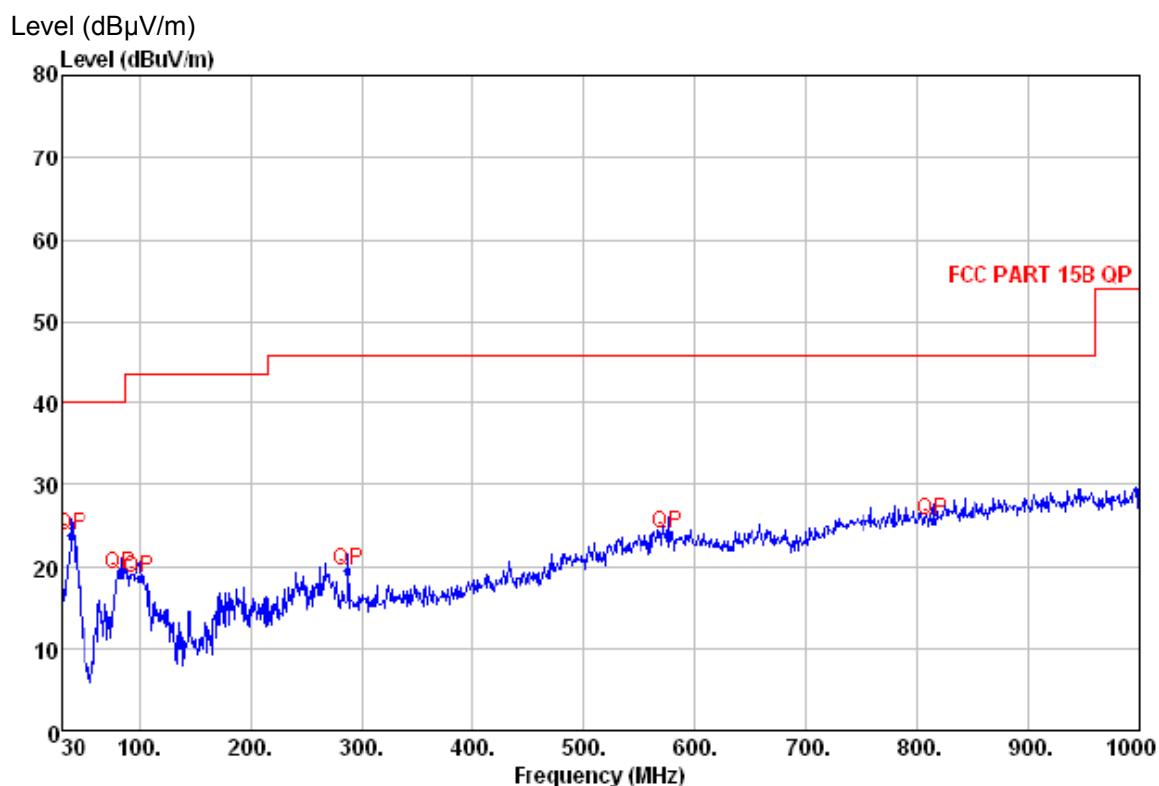

## Quasi-peak measurement

No.	Freq	Level	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor	Loss	Line			
	MHz	dBuV/m		dB/m	dB	dBuV/m	dB	cm	deg
1	38.730	23.92	QP	12.79	0.71	40.00	-16.08	100	342
2	83.350	19.25	QP	7.60	1.06	40.00	-20.75	100	172
3	99.840	18.67	QP	8.69	1.17	43.50	-24.83	100	289
4	288.020	19.68	QP	13.42	2.08	46.00	-26.32	200	246
5	576.110	24.12	QP	19.72	2.99	46.00	-21.88	200	121
6	813.760	25.58	QP	22.69	3.60	46.00	-20.42	200	147

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4804.000	34.32	9.59	27.62	35.61	51.9	74.00	V
7206.000	34.88	12.15	27.33	34.21	53.91	74.00	V
9608.000	37.72	14.41	27.14	38.22	63.21	74.00	V
4804.000	34.32	9.59	27.62	35.45	51.74	74.00	H
7206.000	34.88	12.15	27.33	35.28	54.98	74.00	H
9608.000	37.72	14.41	27.14	38.43	63.42	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4804.000	34.32	9.59	27.62	20.36	36.65	54.00	V
7206.000	34.88	12.15	27.33	19.68	39.38	54.00	V
9608.000	37.72	14.41	27.14	23.63	48.62	54.00	V
4804.000	34.32	9.59	27.62	20.65	36.94	54.00	H
7206.000	34.88	12.15	27.33	20.87	40.57	54.00	H
9608.000	37.72	14.41	27.14	23.50	48.49	54.00	H

### Test at Middle Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

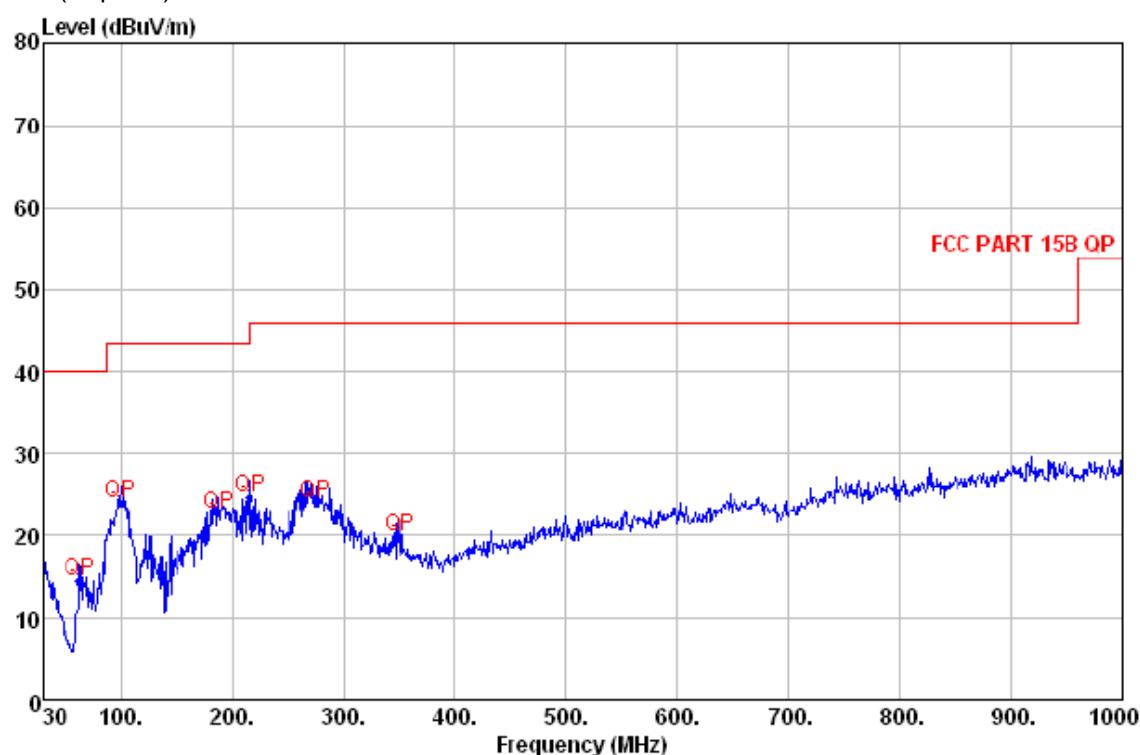

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss dB/m	Limit Line dB $\mu$ V/m	Margin A/pos dB	T/pos cm	Margin A/pos T/pos deg
1	62.980	14.39	QP	6.82	0.92	40.00	-25.61	100	304
2	99.840	24.11	QP	8.69	1.17	43.50	-19.39	100	81
3	188.110	22.71	QP	8.68	1.65	43.50	-20.79	100	284
4	216.240	24.64	QP	9.65	1.78	46.00	-21.36	200	215
5	275.410	24.01	QP	12.63	2.03	46.00	-21.99	200	147
6	351.070	19.89	QP	13.95	2.28	46.00	-26.11	200	177


Level=Read Level + Antenna Factor + Cable Loss

**Test at Middle Channel in transmitting status**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

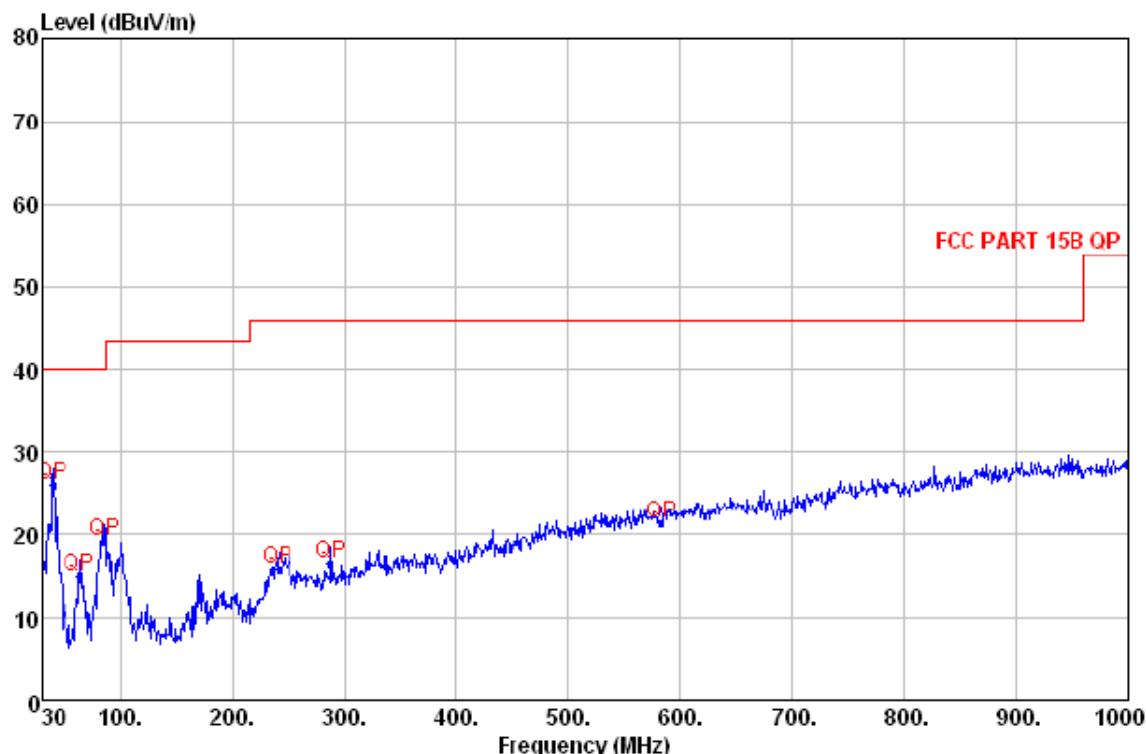Level (dB $\mu$ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss dB/m	Limit Line dB	Margin A/pos dB	T/pos cm	deg
1	39.700	25.99	QP	12.26	0.71	40.00	-14.01	100	289
2	63.950	14.88	QP	6.86	0.93	40.00	-25.12	100	257
3	86.260	19.22	QP	7.83	1.08	40.00	-20.78	100	52
4	241.460	15.77	QP	10.99	1.89	46.00	-30.23	200	199
5	288.020	16.57	QP	13.42	2.08	46.00	-29.43	200	115
6	583.870	21.36	QP	19.96	3.01	46.00	-24.64	200	124

Level=Read Level + Antenna Factor + Cable Loss

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4882.000	34.33	9.59	27.60	35.51	51.83	74.00	V
7323.000	34.92	12.17	27.31	34.63	54.41	74.00	V
9764.000	37.91	14.49	27.13	37.85	63.12	74.00	V
4882.000	34.33	9.59	27.60	35.15	51.47	74.00	H
7323.000	34.92	12.17	27.31	35.48	55.26	74.00	H
9764.000	37.91	14.49	27.13	38.21	63.48	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4882.000	34.33	9.59	27.60	22.63	38.95	54.00	V
7323.000	34.92	12.17	27.31	22.63	42.41	54.00	V
9764.000	37.91	14.49	27.13	23.65	48.92	54.00	V
4882.000	34.33	9.59	27.60	20.36	36.68	54.00	H
7323.000	34.92	12.17	27.31	21.83	41.61	54.00	H
9764.000	37.91	14.49	27.13	22.56	47.83	54.00	H

## Test at high Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

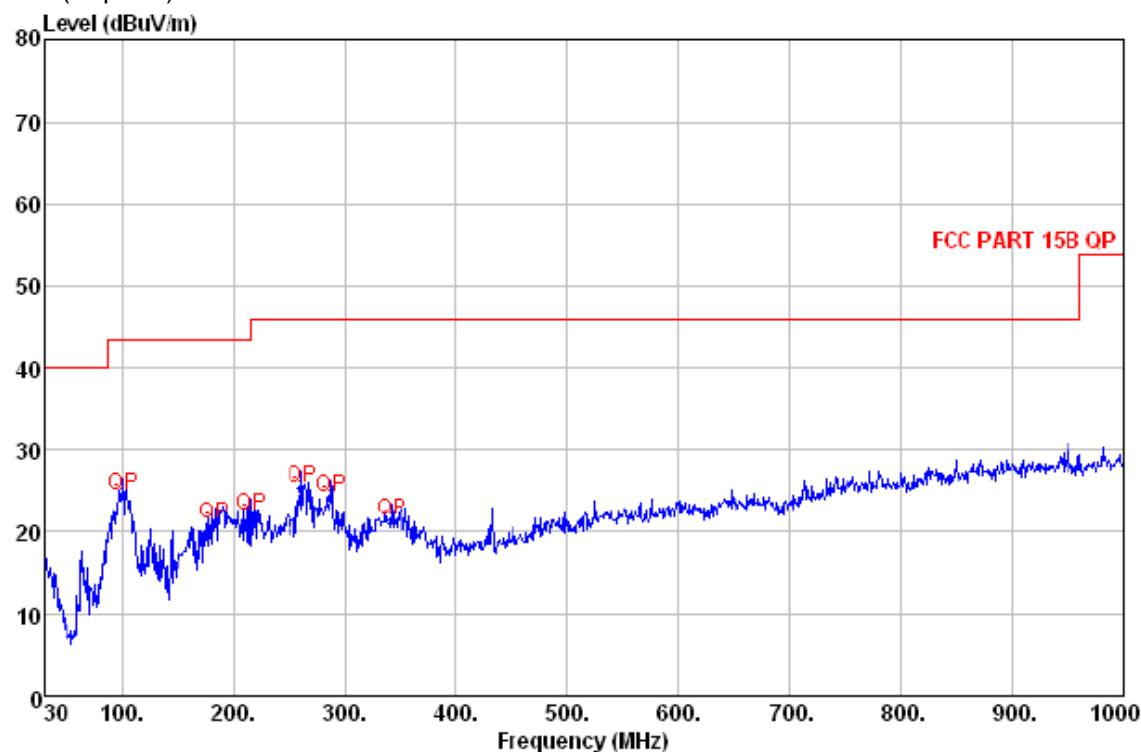

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna Factor	Cable Loss dB	Limit Line dBuV/m	Margin dB	A/pos cm	T/pos deg
1	100.810	24.53	QP	8.67	1.18	43.50	-18.97	100	221
2	184.230	21.04	QP	8.30	1.63	43.50	-22.46	100	257
3	216.240	21.99	QP	9.65	1.78	46.00	-24.01	100	194
4	261.830	25.37	QP	12.46	1.98	46.00	-20.63	200	61
5	288.020	24.31	QP	13.42	2.08	46.00	-21.69	200	112
6	342.340	21.47	QP	13.75	2.26	46.00	-24.53	200	169

Level=Read Level + Antenna Factor + Cable Loss


### Test at High Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB $\mu$ V/m)

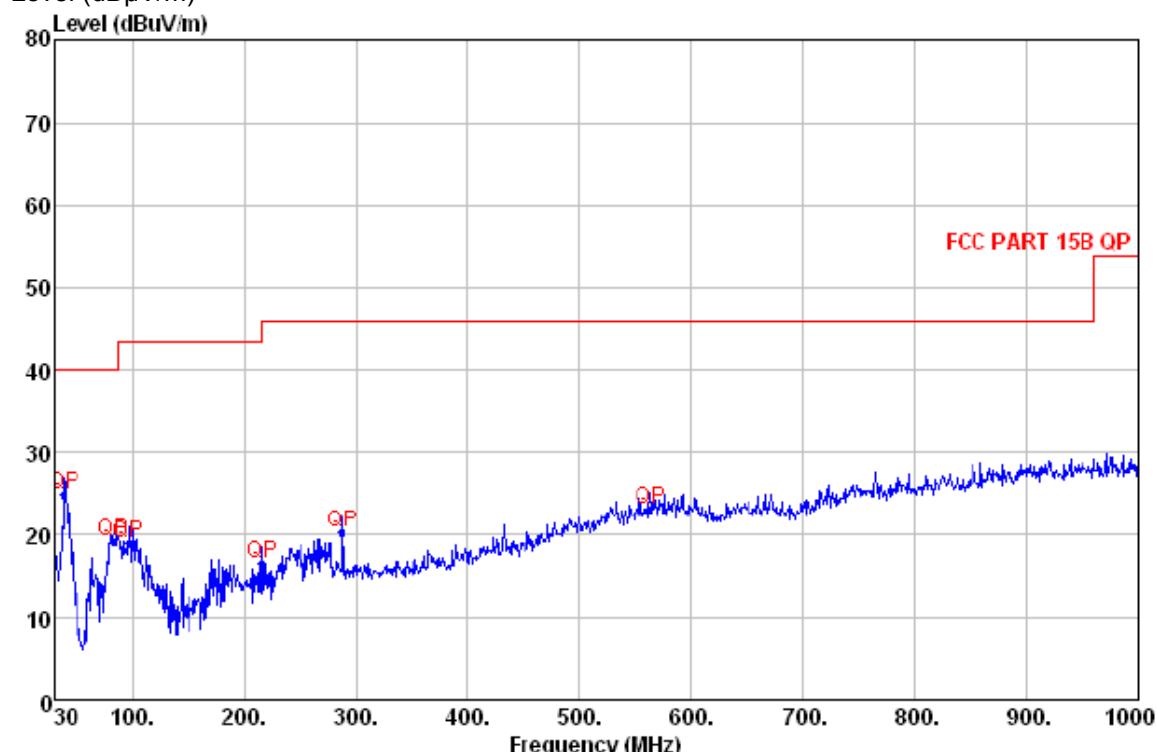

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor	Loss	Line	dB	cm	deg
1	38.730	25.04	QP	12.79	0.71	40.00	-14.96	100	286
2	83.350	19.10	QP	7.60	1.06	40.00	-20.90	100	258
3	96.930	18.87	QP	8.52	1.15	43.50	-24.63	100	87
4	216.240	16.50	QP	9.65	1.78	46.00	-29.50	200	302
5	288.020	20.39	QP	13.42	2.08	46.00	-25.61	200	214
6	563.500	23.26	QP	19.41	2.95	46.00	-22.74	200	124

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4960.000	34.36	9.60	27.61	35.81	52.16	74.00	V
7440.000	34.98	12.19	27.30	34.42	54.29	74.00	V
9920.000	37.96	14.52	27.11	37.63	63	74.00	V
4960.000	34.36	9.60	27.61	35.33	51.68	74.00	H
7440.000	34.98	12.19	27.30	35.61	55.48	74.00	H
9920.000	37.96	14.52	27.11	38.01	63.38	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4960.000	34.36	9.60	27.61	20.36	36.71	54.00	V
7440.000	34.98	12.19	27.30	19.68	39.55	54.00	V
9920.000	37.96	14.52	27.11	23.63	49	54.00	V
4960.000	34.36	9.60	27.61	20.65	37	54.00	H
7440.000	34.98	12.19	27.30	20.87	40.74	54.00	H
9920.000	37.96	14.52	27.11	23.50	48.87	54.00	H

## Test at Receiving status

9kHz~30MHz Test result

**The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dB $\mu$ V/m)



Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna Factor	Cable Loss dB/m	Limit Line dBuV/m	Margin dB	A/pos cm	I/pos deg
1	100.810	25.08	QP	8.67	1.18	43.50	-18.42	100	158
2	185.200	27.99	QP	8.32	1.64	43.50	-15.51	100	172
3	263.770	25.36	QP	12.42	1.98	46.00	-20.64	100	192
4	303.540	29.96	QP	13.73	2.14	46.00	-16.04	200	158
5	351.070	22.53	QP	13.95	2.28	46.00	-23.47	200	87
6	594.540	22.12	QP	20.02	3.04	46.00	-23.88	200	251


**Level=Read Level + Antenna Factor + Cable Loss**

**Test at Receiving status**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

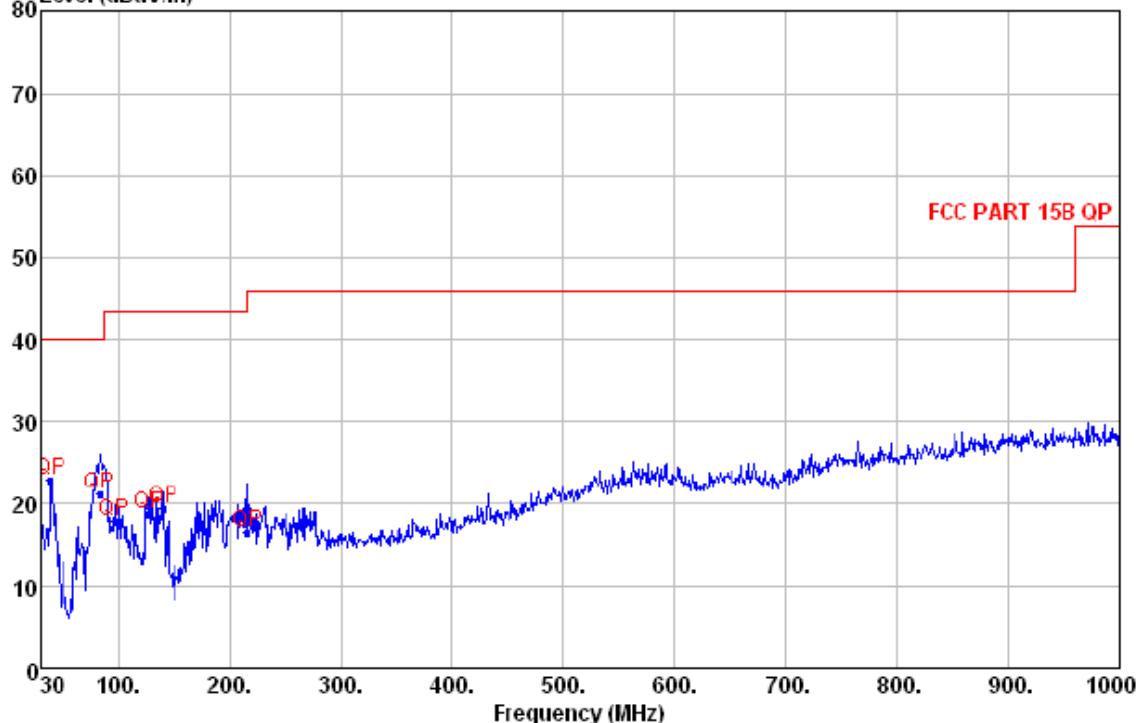Level (dB $\mu$ V/m)Level (dB $\mu$ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss dB	Limit Line dB $\mu$ V/m	Margin A/pos dB	T/pos cm	Margin A/pos T/pos deg
1	38.730	23.04	QP	12.79	0.71	40.00	-16.96	100	286
2	83.350	21.10	QP	7.60	1.06	40.00	-18.90	100	258
3	96.930	17.87	QP	8.52	1.15	43.50	-25.63	100	281
4	127.000	18.74	QP	7.58	1.34	43.50	-24.76	200	108
5	140.580	19.40	QP	7.40	1.41	43.50	-24.10	200	147
6	216.240	16.50	QP	9.65	1.78	46.00	-29.50	200	302

Level=Read Level + Antenna Factor + Cable Loss

**Test at Receiving status**

Above 1 GHz Spurious Emissions Measurement

**No emissions above 1GHz were found.**

For Soundbar (Power supply: Hanwei, type: Hanny13w70) (Bluetooth mode)

**Test at low Channel in transmitting status**

9kHz~30MHz Test result


**The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dB $\mu$ V/m)

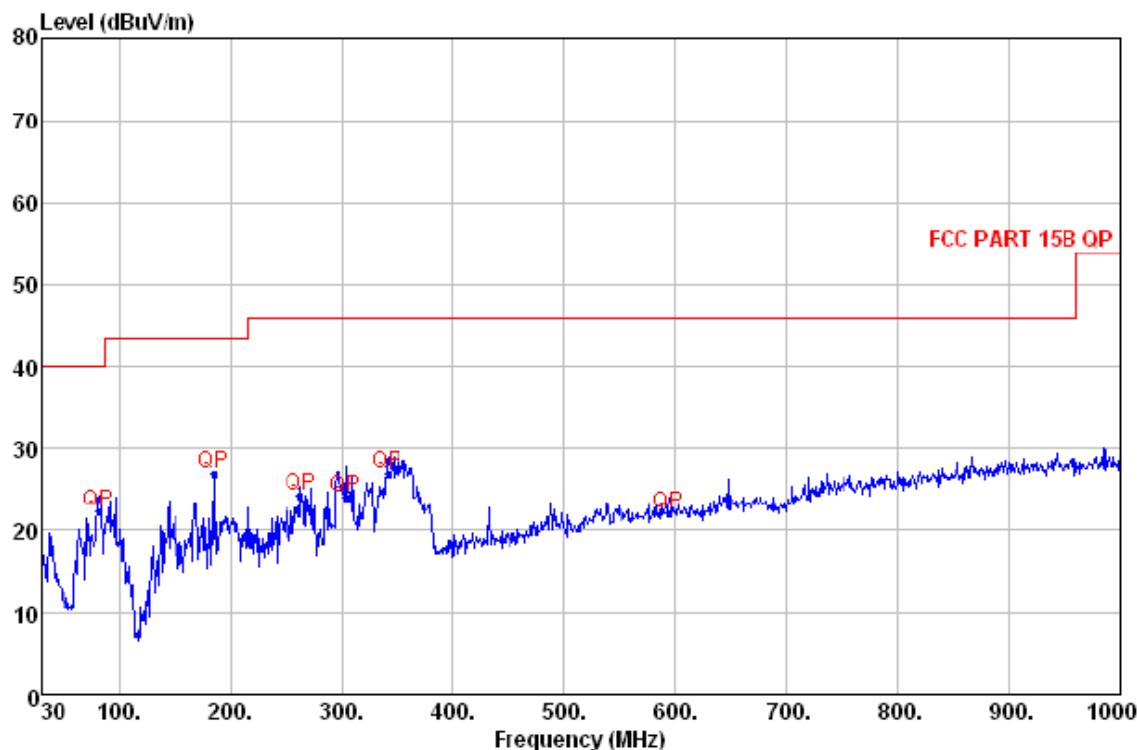

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor dB/m	Loss dB	Line dB $\mu$ V/m	dB	cm	deg
1	82.380	22.24	QP	7.55	1.06	40.00	-17.76	100	147
2	185.200	26.99	QP	8.32	1.64	43.50	-16.51	100	199
3	263.770	24.36	QP	12.42	1.98	46.00	-21.64	100	192
4	303.540	23.96	QP	13.73	2.14	46.00	-22.04	200	177
5	341.370	26.93	QP	13.73	2.25	46.00	-19.07	200	87
6	594.540	22.12	QP	20.02	3.04	46.00	-23.88	200	251


**Level=Read Level + Antenna Factor + Cable Loss**

**Test at low Channel in transmitting status**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

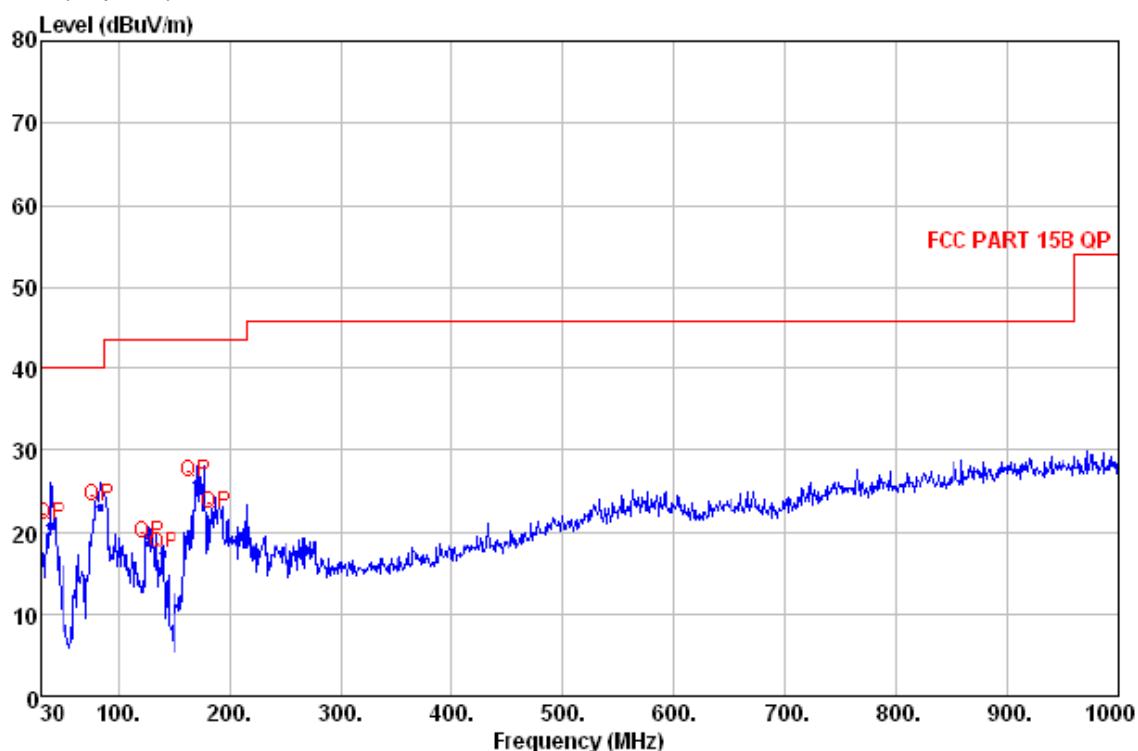Level (dB<sub>UV</sub>/m)

Quasi-peak measurement

No.	Freq MHz	Level dB <sub>UV</sub> /m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor	Loss dB	Line dB	dB	cm	deg
1	38.730	21.04	QP	12.79	0.71	40.00	-18.96	100	111
2	83.350	23.10	QP	7.60	1.06	40.00	-16.90	100	258
3	127.000	18.74	QP	7.58	1.34	43.50	-24.76	200	108
4	140.580	17.40	QP	7.40	1.41	43.50	-26.10	200	210
5	170.650	26.02	QP	8.37	1.56	43.50	-17.48	200	304
6	188.110	22.20	QP	8.68	1.65	43.50	-21.30	200	84

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4804.000	34.32	9.59	27.62	35.60	51.89	74.00	V
7206.000	34.88	12.15	27.33	34.26	53.96	74.00	V
9608.000	37.72	14.41	27.14	38.12	63.11	74.00	V
4804.000	34.32	9.59	27.62	35.65	51.94	74.00	H
7206.000	34.88	12.15	27.33	35.29	54.99	74.00	H
9608.000	37.72	14.41	27.14	38.46	63.45	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4804.000	34.32	9.59	27.62	20.32	36.61	54.00	V
7206.000	34.88	12.15	27.33	19.69	39.39	54.00	V
9608.000	37.72	14.41	27.14	23.13	48.12	54.00	V
4804.000	34.32	9.59	27.62	20.35	36.64	54.00	H
7206.000	34.88	12.15	27.33	20.68	40.38	54.00	H
9608.000	37.72	14.41	27.14	23.30	48.29	54.00	H

## Test at Middle Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

### Horizontal:

Peak scan

Level (dB $\mu$ V/m)

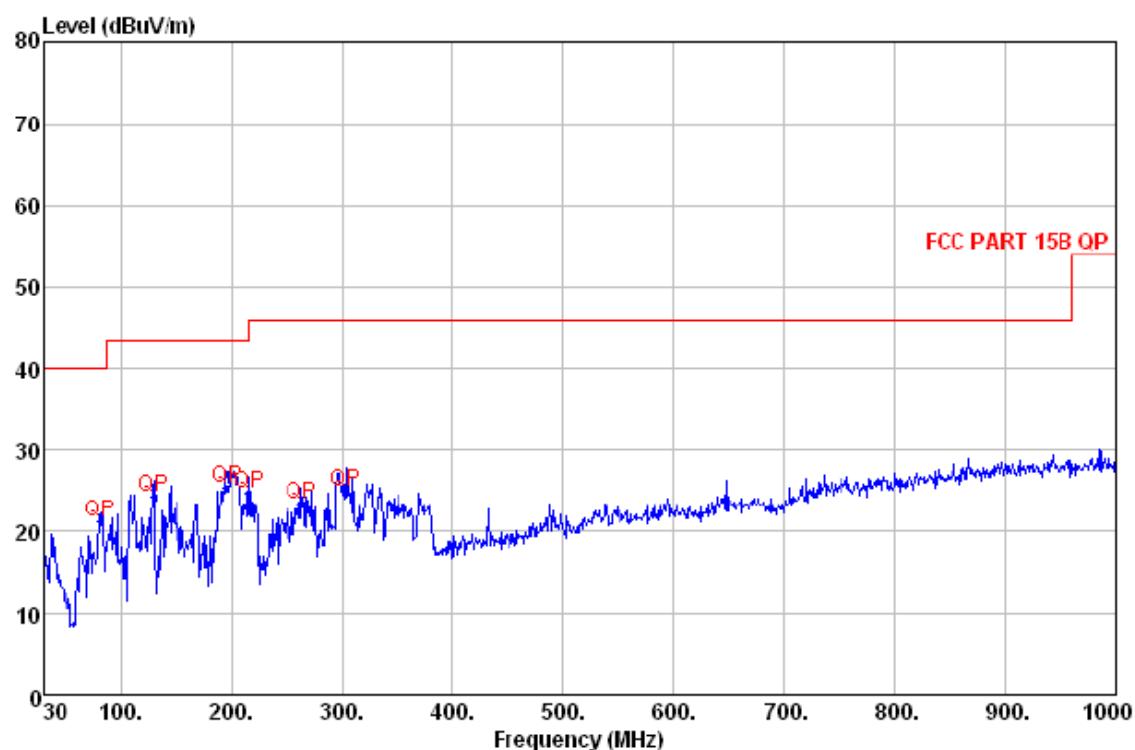

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor dB/m	Loss dB	Line dBuV/m	dB	cm	deg
1	82.380	21.24	QP	7.55	1.06	40.00	-18.76	100	105
2	129.910	24.32	QP	7.41	1.36	43.50	-19.18	100	310
3	195.870	25.51	QP	8.41	1.69	43.50	-17.99	100	205
4	216.240	24.77	QP	9.65	1.78	46.00	-21.23	200	159
5	263.770	23.36	QP	12.42	1.98	46.00	-22.64	100	192
6	303.540	24.96	QP	13.73	2.14	46.00	-21.04	200	177

Level=Read Level + Antenna Factor + Cable Loss


### Test at Middle Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB $\mu$ V/m)

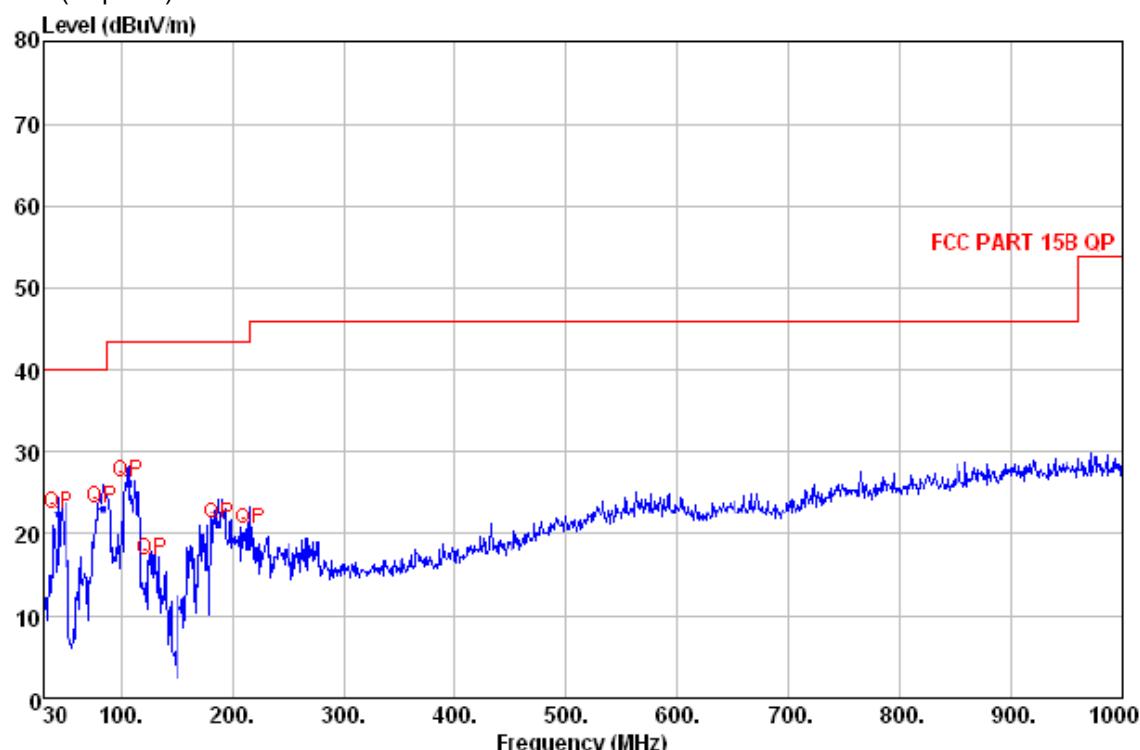

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss dB/m	Limit Line dB	Margin dB	A/pos cm	T/pos deg
1	43.580	22.51	QP	10.84	0.75	40.00	-17.49	100	147
2	83.350	23.10	QP	7.60	1.06	40.00	-16.90	100	258
3	106.630	26.21	QP	8.50	1.21	43.50	-17.29	100	261
4	127.000	16.74	QP	7.58	1.34	43.50	-26.76	200	108
5	188.110	21.20	QP	8.68	1.65	43.50	-22.30	200	84
6	216.240	20.50	QP	9.65	1.78	46.00	-25.50	200	299

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4882.000	34.33	9.59	27.60	35.16	51.48	74.00	V
7323.000	34.92	12.17	27.31	34.28	54.06	74.00	V
9764.000	37.91	14.49	27.13	37.52	62.79	74.00	V
4882.000	34.33	9.59	27.60	35.65	51.97	74.00	H
7323.000	34.92	12.17	27.31	35.83	55.61	74.00	H
9764.000	37.91	14.49	27.13	38.63	63.9	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4882.000	34.33	9.59	27.60	22.52	38.84	54.00	V
7323.000	34.92	12.17	27.31	22.36	42.14	54.00	V
9764.000	37.91	14.49	27.13	23.25	48.52	54.00	V
4882.000	34.33	9.59	27.60	20.39	36.71	54.00	H
7323.000	34.92	12.17	27.31	21.63	41.41	54.00	H
9764.000	37.91	14.49	27.13	22.46	47.73	54.00	H

## Test at high Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

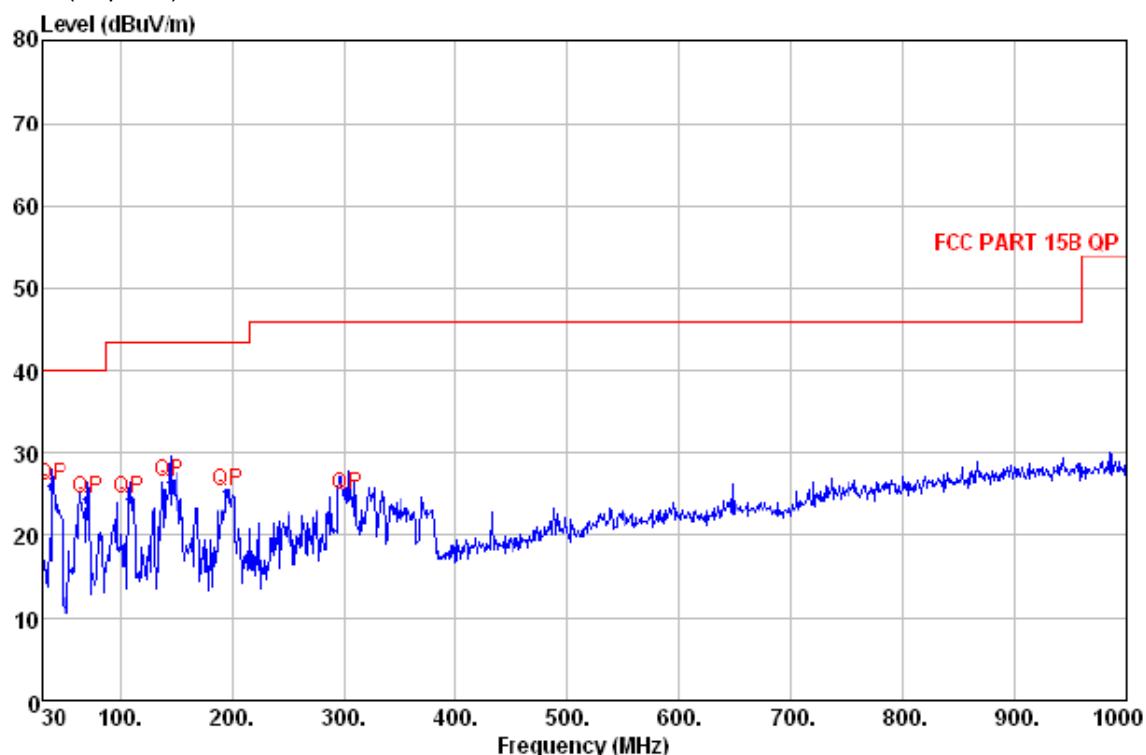

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dBuV/m	Margin A/pos dB	T/pos cm	deg
1	38.730	26.07	QP	12.79	0.71	40.00	-13.93	100	221
2	71.710	24.41	QP	7.14	0.99	40.00	-15.59	100	61
3	108.570	24.57	QP	8.50	1.22	43.50	-18.93	100	304
4	144.460	26.62	QP	7.40	1.43	43.50	-16.88	200	166
5	195.870	25.51	QP	8.41	1.69	43.50	-17.99	100	205
6	303.540	24.96	QP	13.73	2.14	46.00	-21.04	200	177

Level=Read Level + Antenna Factor + Cable Loss


## Test at High Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

### Vertical:

Peak scan

Level (dB $\mu$ V/m)

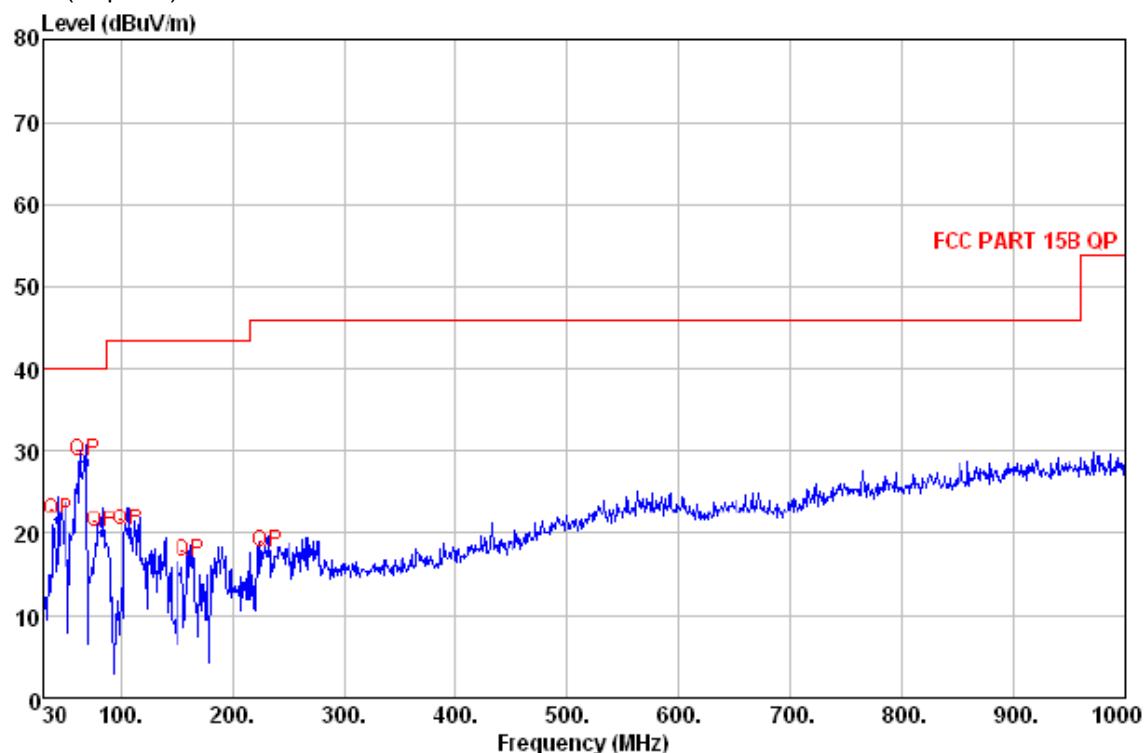

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss	Limit dB	Margin dB	Δ/pos cm	θ/pos deg
1	43.580	21.51	QP	10.84	0.75	40.00	-18.49	100	147
2	68.800	28.71	QP	6.98	0.97	40.00	-11.29	100	51
3	83.350	20.10	QP	7.60	1.06	40.00	-19.90	100	258
4	106.630	20.21	QP	8.50	1.21	43.50	-23.29	200	258
5	162.890	16.39	QP	7.63	1.52	43.50	-27.11	200	106
6	231.760	17.53	QP	11.09	1.85	46.00	-28.47	200	189

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4960.000	34.36	9.60	27.61	35.23	51.58	74.00	V
7440.000	34.98	12.19	27.30	34.26	54.13	74.00	V
9920.000	37.96	14.52	27.11	37.23	62.6	74.00	V
4960.000	34.36	9.60	27.61	35.39	51.74	74.00	H
7440.000	34.98	12.19	27.30	35.11	54.98	74.00	H
9920.000	37.96	14.52	27.11	38.38	63.75	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4960.000	34.36	9.60	27.61	20.31	36.66	54.00	V
7440.000	34.98	12.19	27.30	19.88	39.75	54.00	V
9920.000	37.96	14.52	27.11	23.14	48.51	54.00	V
4960.000	34.36	9.60	27.61	21.05	37.4	54.00	H
7440.000	34.98	12.19	27.30	21.67	41.54	54.00	H
9920.000	37.96	14.52	27.11	23.08	48.45	54.00	H

## Test at Receiving status

9kHz~30MHz Test result


**The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dB $\mu$ V/m)

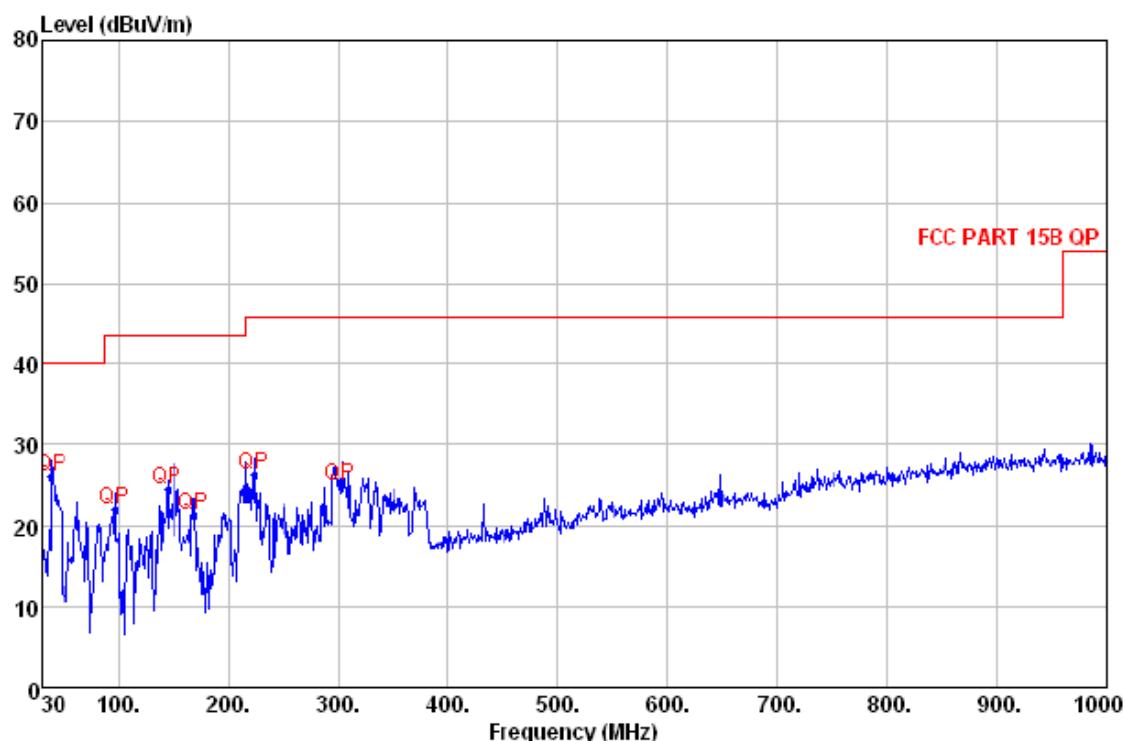

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dBuV/m	Margin A/pos dB	T/pos cm	Margin A/pos deg
1	38.730	26.07	QP	12.79	0.71	40.00	-13.93	100	221
2	96.930	22.06	QP	8.52	1.15	43.50	-21.44	100	198
3	144.460	24.62	QP	7.40	1.43	43.50	-18.88	100	24
4	168.710	21.33	QP	8.17	1.55	43.50	-22.17	200	147
5	223.030	26.38	QP	10.47	1.81	46.00	-19.62	200	188
6	302.100	24.96	QP	13.76	2.13	46.00	-21.04	200	177


Level=Read Level + Antenna Factor + Cable Loss

**Test at Receiving status**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

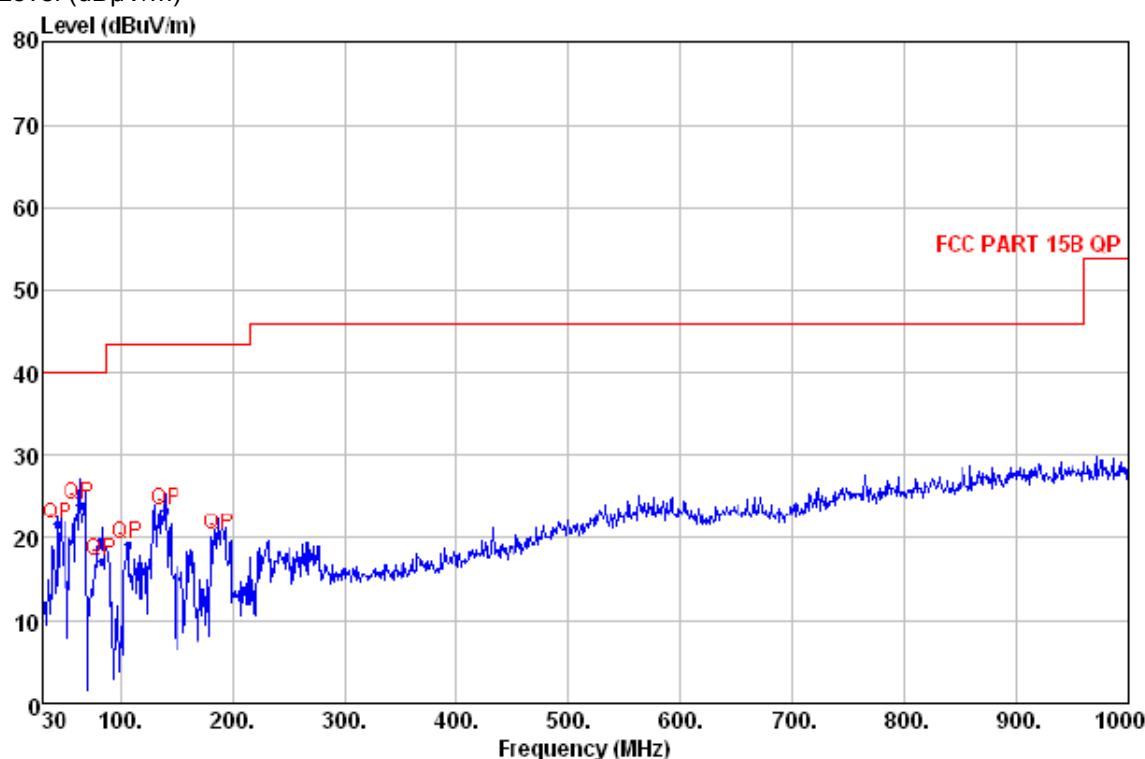Level (dB $\mu$ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss	Limit dB	Margin dB	A/pos cm	T/pos deg
1	43.580	21.51	QP	10.84	0.75	40.00	-18.49	100	147
2	63.950	24.08	QP	6.86	0.93	40.00	-15.92	100	308
3	83.350	17.10	QP	7.60	1.06	40.00	-22.90	100	105
4	106.630	19.21	QP	8.50	1.21	43.50	-24.29	200	258
5	140.580	23.40	QP	7.40	1.41	43.50	-20.10	200	198
6	188.110	20.20	QP	8.68	1.65	43.50	-23.30	200	207

Level=Read Level + Antenna Factor + Cable Loss

**Test at Receiving status**

Above 1 GHz Spurious Emissions Measurement

**No emissions above 1GHz were found.**

For Soundbar (Power supply: JQH, type: NER-SPM00-217) (2.4G wireless module FSK mode)

**Test at low Channel in transmitting status**

9kHz~30MHz Test result


**The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dB $\mu$ V/m)

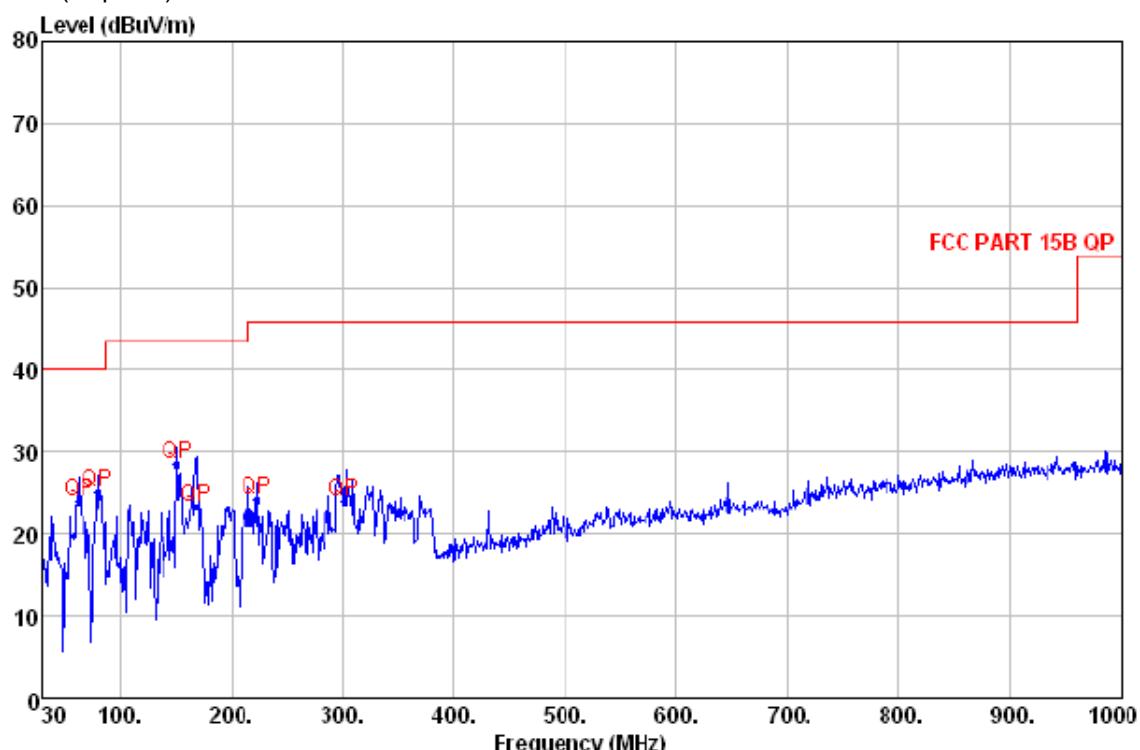

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dBuV/m	Margin dB	A/pos cm	T/pos deg
1	62.980	24.00	QP	6.82	0.92	40.00	-16.00	100	258
2	80.440	25.10	QP	7.43	1.05	40.00	-14.90	100	24
3	152.220	28.53	QP	7.32	1.47	43.50	-14.97	100	321
4	168.710	23.33	QP	8.17	1.55	43.50	-20.17	200	188
5	223.030	24.38	QP	10.47	1.81	46.00	-21.62	200	147
6	302.100	23.96	QP	13.76	2.13	46.00	-22.04	200	177

Level=Read Level + Antenna Factor + Cable Loss


## Test at low Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

Level (dB<sub>UV</sub>/m)

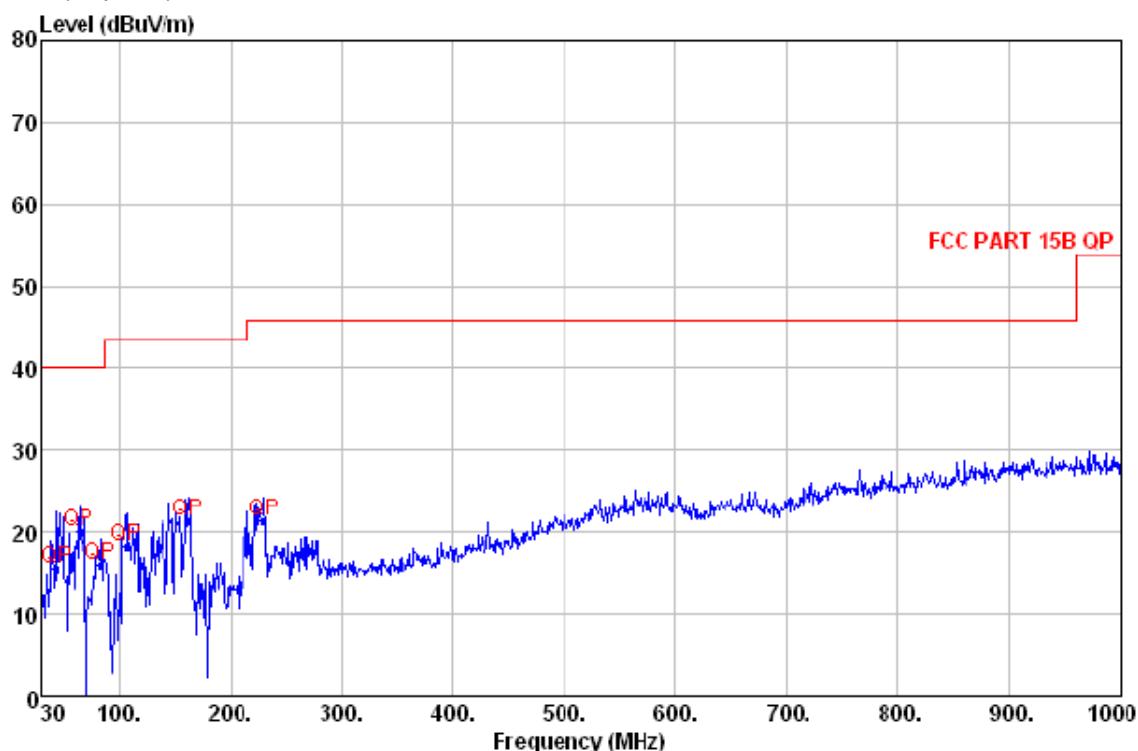

Quasi-peak measurement

No.	Freq MHz	Level dB <sub>UV</sub> /m	Remark	Antenna	Cable	Limit	Margin A/pos	T/pos
				Factor dB/m	Loss dB	Line dB	cm	deg
1	43.580	15.51	QP	10.84	0.75	40.00	-24.49	100 188
2	63.950	20.08	QP	6.86	0.93	40.00	-19.92	100 308
3	83.350	16.10	QP	7.60	1.06	40.00	-23.90	100 105
4	106.630	18.21	QP	8.50	1.21	43.50	-25.29	200 258
5	162.890	21.39	QP	7.63	1.52	43.50	-22.11	200 135
6	230.790	21.29	QP	11.15	1.84	46.00	-24.71	200 115

**Level=Read Level + Antenna Factor + Cable Loss**

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4807.000	34.32	9.59	27.62	38.60	54.89	74.00	V
7210.500	34.88	12.15	27.33	36.06	55.76	74.00	V
9614.000	37.72	14.41	27.14	36.12	61.11	74.00	V
4807.000	34.32	9.59	27.62	38.65	54.94	74.00	H
7210.500	34.88	12.15	27.33	36.09	55.79	74.00	H
9614.000	37.72	14.41	27.14	36.16	61.15	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4807.000	34.32	9.59	27.62	33.31	49.6	54.00	V
7210.500	34.88	12.15	27.33	20.81	40.51	54.00	V
9614.000	37.72	14.41	27.14	23.63	48.62	54.00	V
4807.000	34.32	9.59	27.62	31.05	47.34	54.00	H
7210.500	34.88	12.15	27.33	21.61	41.31	54.00	H
9614.000	37.72	14.41	27.14	23.23	48.22	54.00	H

### Test at Middle Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

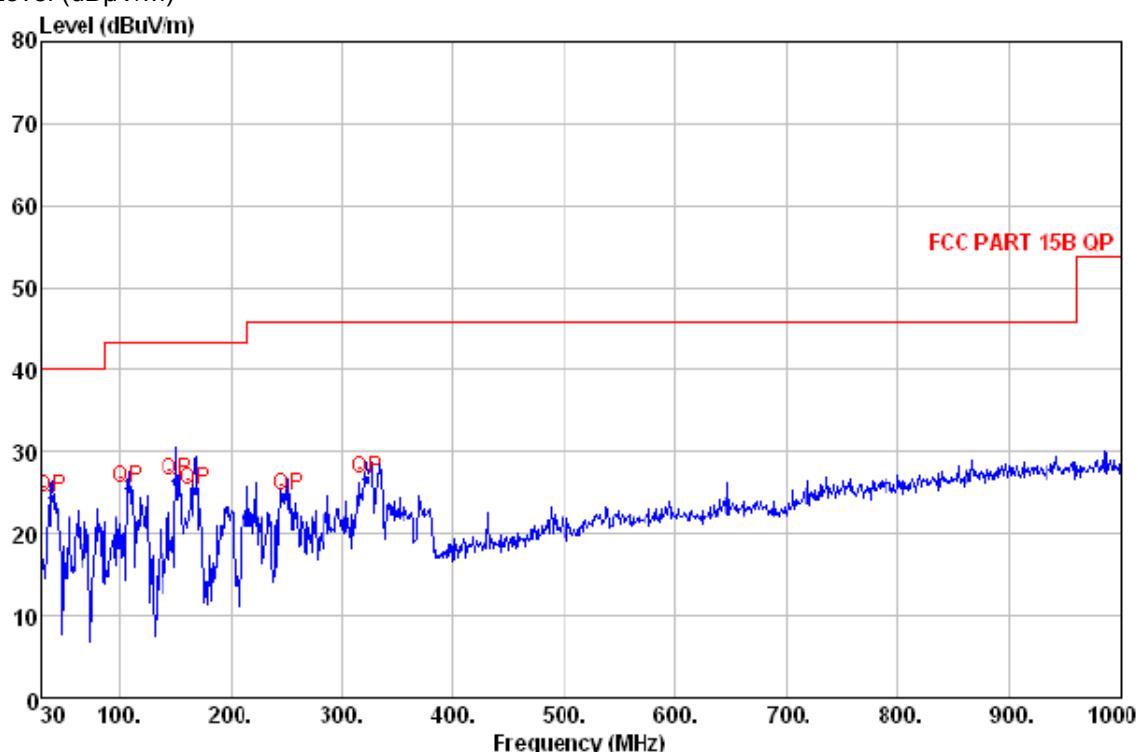

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin A/pos	T/pos	
				Factor dB/m	Loss dB	Line dB $\mu$ V/m	dB	cm	deg
1	39.700	24.42	QP	12.26	0.71	40.00	-15.58	100	94
2	108.570	25.57	QP	8.50	1.22	43.50	-17.93	100	220
3	152.220	26.53	QP	7.32	1.47	43.50	-16.97	100	321
4	168.710	25.33	QP	8.17	1.55	43.50	-18.17	200	188
5	252.130	24.63	QP	11.89	1.94	46.00	-21.37	200	274
6	322.940	26.85	QP	14.00	2.20	46.00	-19.15	200	198


Level=Read Level + Antenna Factor + Cable Loss

**Test at Middle Channel in transmitting status**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

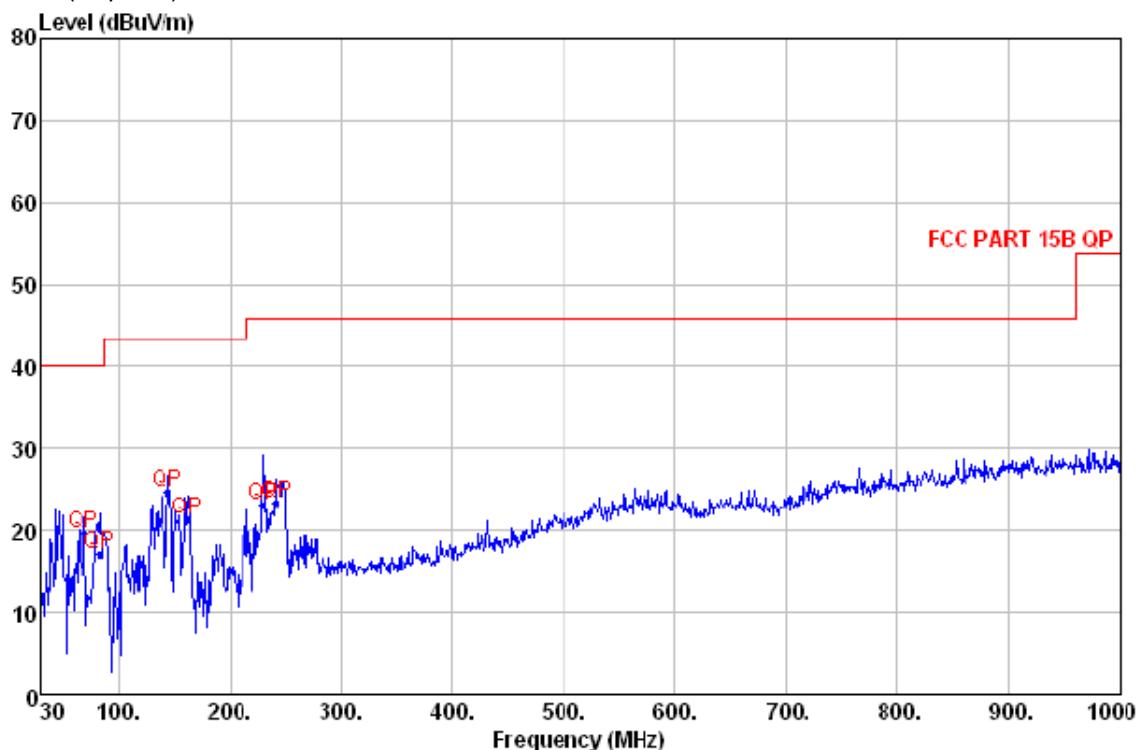Level (dB $\mu$ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss dB/m	Limit Line dB $\mu$ V/m	Margin A/pos dB	T/pos cm	deg
1	68.800	19.71	QP	6.98	0.97	40.00	-20.29	100	258
2	83.350	17.10	QP	7.60	1.06	40.00	-22.90	100	105
3	144.460	24.73	QP	7.40	1.43	43.50	-18.77	100	199
4	162.890	21.39	QP	7.63	1.52	43.50	-22.11	200	147
5	230.790	23.29	QP	11.15	1.84	46.00	-22.71	200	115
6	242.430	23.38	QP	11.05	1.90	46.00	-22.62	200	184

**Level=Read Level + Antenna Factor + Cable Loss**

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4880.800	34.33	9.59	27.60	39.50	55.82	74.00	V
7321.200	34.92	12.17	27.31	37.06	56.84	74.00	V
9761.600	37.91	14.49	27.13	36.19	61.46	74.00	V
4880.800	34.33	9.59	27.60	39.62	55.94	74.00	H
7321.200	34.92	12.17	27.31	36.08	55.86	74.00	H
9761.600	37.91	14.49	27.13	36.19	61.46	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4880.800	34.33	9.59	27.60	33.81	50.13	54.00	V
7321.200	34.92	12.17	27.31	21.61	41.39	54.00	V
9761.600	37.91	14.49	27.13	22.69	47.96	54.00	V
4880.800	34.33	9.59	27.60	32.75	49.07	54.00	H
7321.200	34.92	12.17	27.31	21.19	40.97	54.00	H
9761.600	37.91	14.49	27.13	22.38	47.65	54.00	H

## Test at high Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

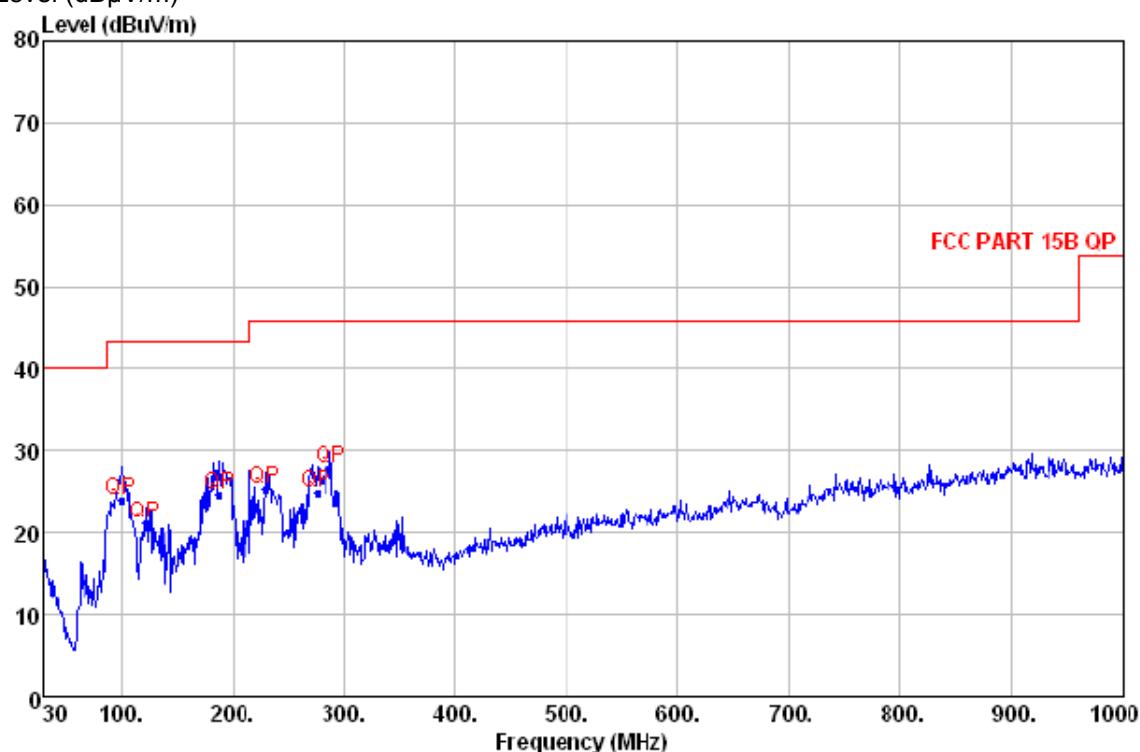

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dB $\mu$ V/m	Margin A/pos dB	T/pos cm	deg
1	99.840	24.11	QP	8.69	1.17	43.50	-19.39	100	81
2	121.180	21.07	QP	7.70	1.30	43.50	-22.43	100	227
3	188.110	24.71	QP	8.68	1.65	43.50	-18.79	100	284
4	229.820	25.31	QP	11.18	1.84	46.00	-20.69	200	147
5	275.410	25.01	QP	12.63	2.03	46.00	-20.99	200	147
6	288.020	27.95	QP	13.42	2.08	46.00	-18.05	200	304

Level=Read Level + Antenna Factor + Cable Loss


## Test at High Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB $\mu$ V/m)

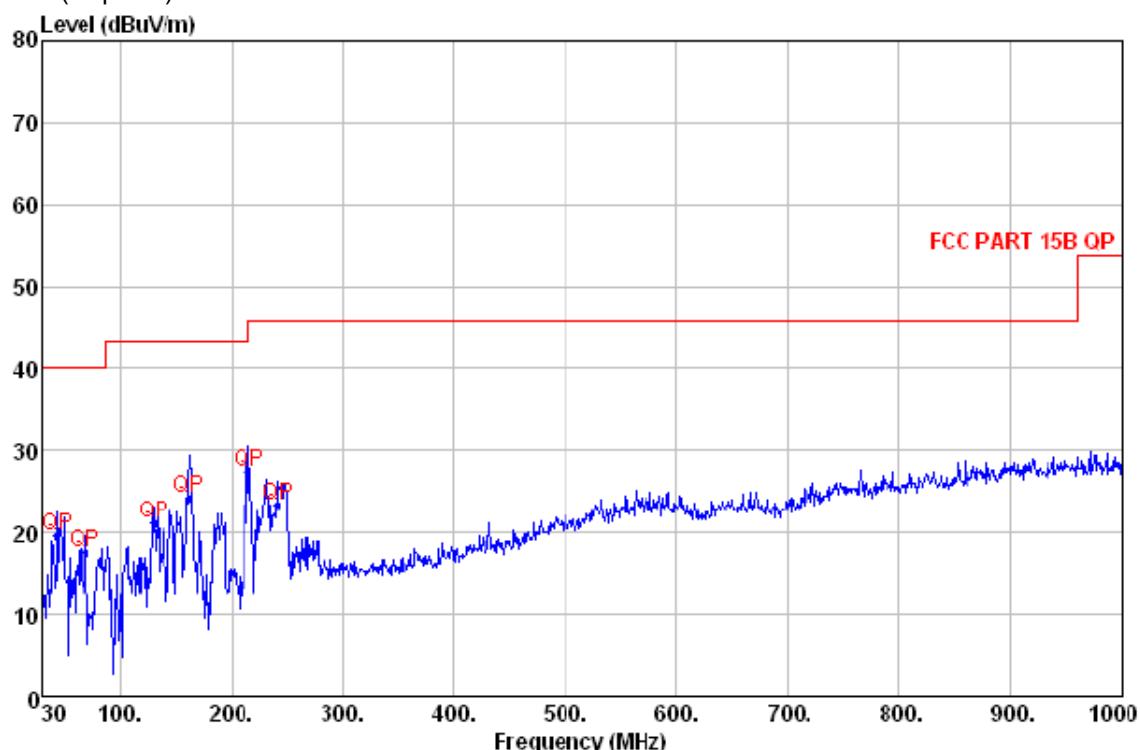

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin A/pos	T/pos
				Factor	Loss	Line dB $\mu$ V/m	dB	cm deg
1	43.580	19.51	QP	10.84	0.75	40.00	-20.49	100 315
2	68.800	17.71	QP	6.98	0.97	40.00	-22.29	100 258
3	130.880	21.13	QP	7.40	1.36	43.50	-22.37	100 229
4	162.890	24.39	QP	7.63	1.52	43.50	-19.11	200 147
5	216.240	27.50	QP	9.65	1.78	46.00	-18.50	200 176
6	242.430	23.38	QP	11.05	1.90	46.00	-22.62	200 184

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4954.600	34.36	9.60	27.61	39.38	55.73	74.00	V
7431.900	34.98	12.19	27.30	37.38	57.25	74.00	V
9909.200	37.96	14.52	27.11	36.28	61.65	74.00	V
4954.600	34.36	9.60	27.61	39.69	56.04	74.00	H
7431.900	34.98	12.19	27.30	37.08	56.95	74.00	H
9909.200	37.96	14.52	27.11	36.16	61.53	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4954.600	34.36	9.60	27.61	34.63	50.98	54.00	V
7431.900	34.98	12.19	27.30	22.67	42.54	54.00	V
9909.200	37.96	14.52	27.11	22.59	47.96	54.00	V
4954.600	34.36	9.60	27.61	32.78	49.13	54.00	H
7431.900	34.98	12.19	27.30	21.68	41.55	54.00	H
9909.200	37.96	14.52	27.11	22.38	47.75	54.00	H

## Test at Receiving status

9kHz~30MHz Test result


**The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dB $\mu$ V/m)

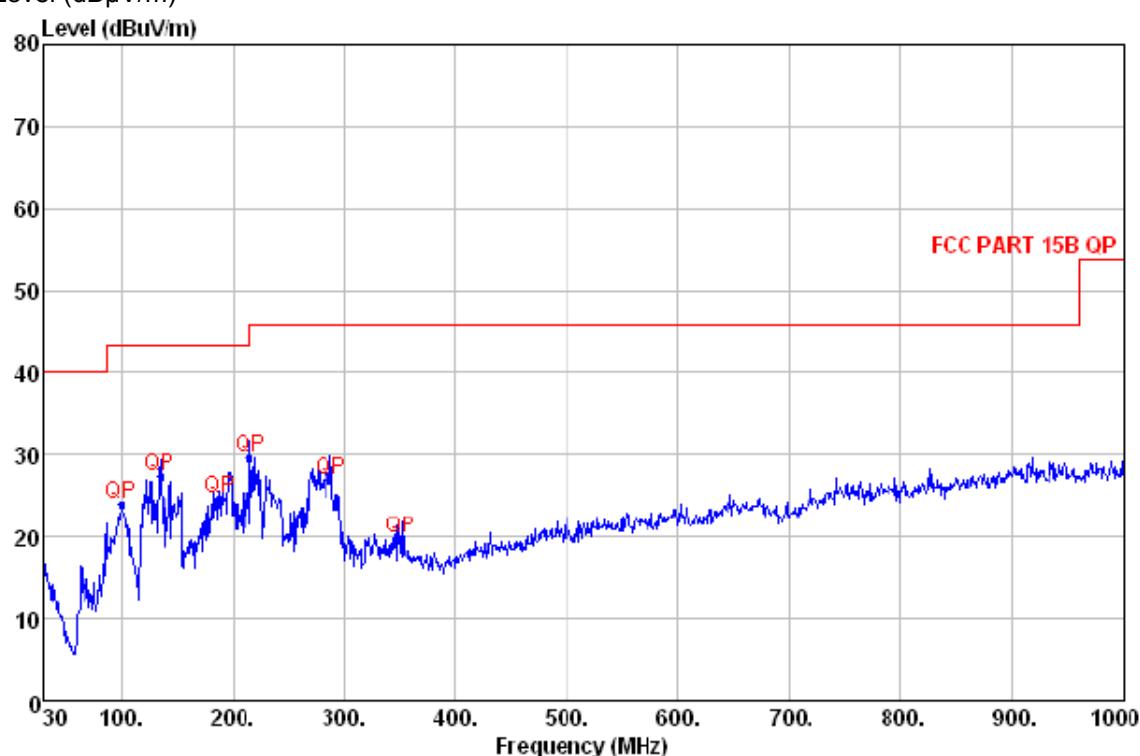

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor dB/m	Loss dB	Line dBuV/m	dB	cm	deg
1	99.840	24.11	QP	8.69	1.17	43.50	-19.39	100	81
2	134.760	27.46	QP	7.40	1.38	43.50	-16.04	100	154
3	188.110	24.71	QP	8.68	1.65	43.50	-18.79	100	284
4	216.240	29.64	QP	9.65	1.78	46.00	-16.36	100	314
5	288.020	26.95	QP	13.42	2.08	46.00	-19.05	200	304
6	351.070	19.89	QP	13.95	2.28	46.00	-26.11	200	224


Level=Read Level + Antenna Factor + Cable Loss

**Test at Receiving status**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

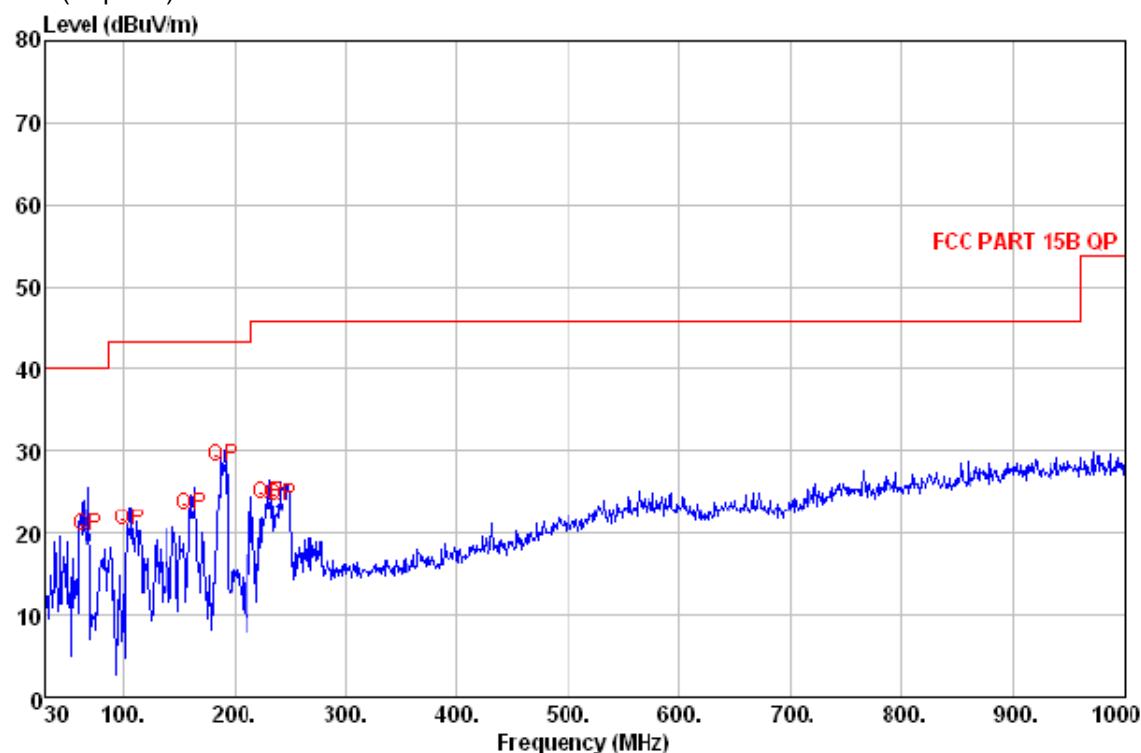Level (dB $\mu$ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna	Cable	Limit	Margin A/pos	T/pos
				Factor	Loss dB	Line dBuV/m	dB	cm deg
1	68.800	19.71	QP	6.98	0.97	40.00	-20.29	100 57
2	106.630	20.21	QP	8.50	1.21	43.50	-23.29	100 306
3	162.890	22.39	QP	7.63	1.52	43.50	-21.11	200 107
4	190.050	28.18	QP	8.89	1.66	43.50	-15.32	200 289
5	231.760	23.53	QP	11.09	1.85	46.00	-22.47	200 198
6	242.430	23.38	QP	11.05	1.90	46.00	-22.62	200 123

**Level=Read Level + Antenna Factor + Cable Loss**

**Test at Receiving status**

Above 1 GHz Spurious Emissions Measurement

**No emissions above 1GHz were found.**

For Soundbar (Power supply: Hanwei, type: Hanny13w70) (2.4G wireless module FSK mode)

**Test at low Channel in transmitting status**

9kHz~30MHz Test result


**The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dB $\mu$ V/m)

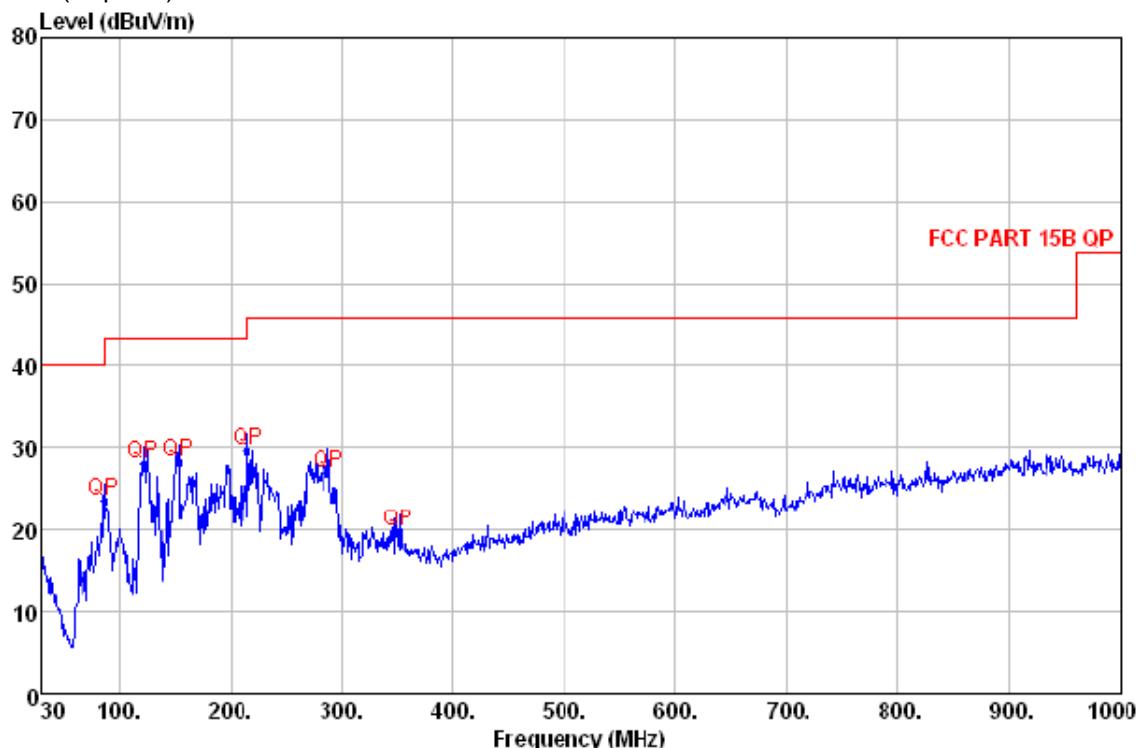

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna Factor	Cable Loss dB	Limit Line dB $\mu$ V/m	Margin dB	A/pos cm	T/pos deg
1	87.230	23.58	QP	7.93	1.09	40.00	-16.42	100	248
2	121.180	28.07	QP	7.70	1.30	43.50	-15.43	100	64
3	154.160	28.39	QP	7.52	1.48	43.50	-15.11	100	127
4	216.240	29.64	QP	9.65	1.78	46.00	-16.36	100	314
5	288.020	26.95	QP	13.42	2.08	46.00	-19.05	200	304
6	351.070	19.89	QP	13.95	2.28	46.00	-26.11	200	224

**Level=Read Level + Antenna Factor + Cable Loss**


### Test at low Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB $\mu$ V/m)

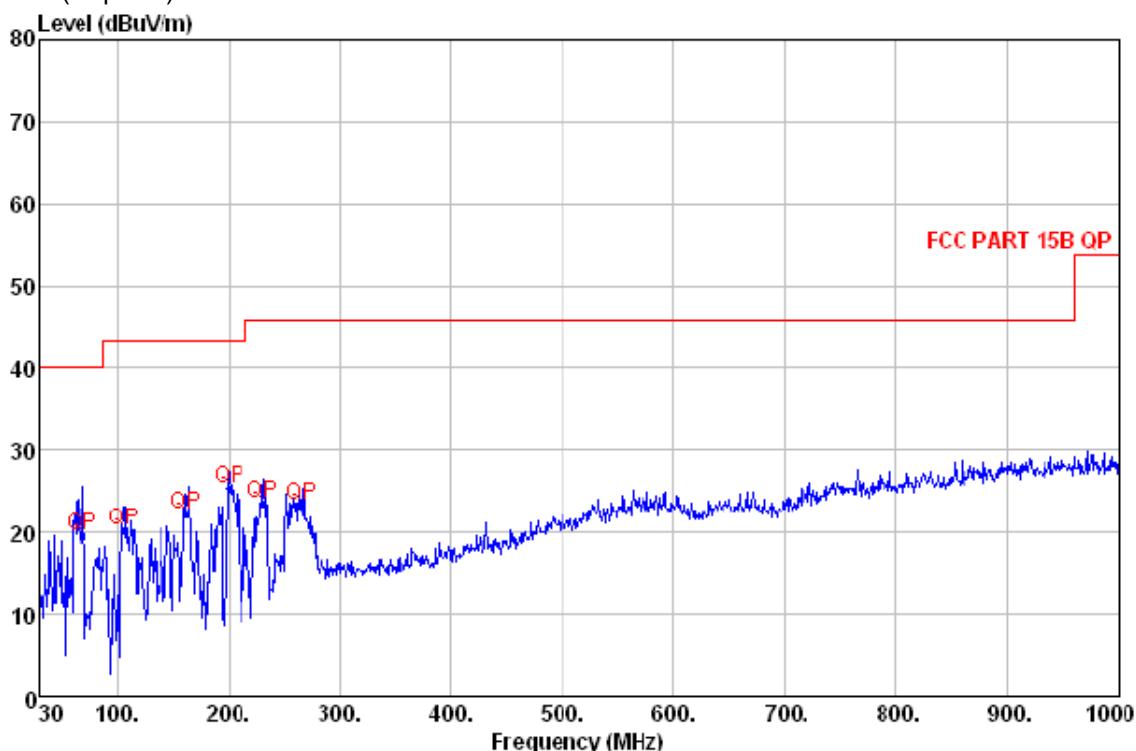

Quasi-peak measurement

No.	Freq MHz	Level dBuV/m	Remark	Antenna	Cable	Limit	Margin	A/pos	I/pos
				Factor	Loss	Line	dB	cm	deg
1	68.800	19.71	QP	6.98	0.97	40.00	-20.29	100	88
2	106.630	20.21	QP	8.50	1.21	43.50	-23.29	100	188
3	162.890	22.39	QP	7.63	1.52	43.50	-21.11	100	107
4	200.720	25.35	QP	8.93	1.71	43.50	-18.15	200	236
5	231.760	23.53	QP	11.09	1.85	46.00	-22.47	200	198
6	265.710	23.49	QP	12.49	1.99	46.00	-22.51	200	123

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4807.000	34.32	9.59	27.62	38.53	54.82	74.00	V
7210.500	34.88	12.15	27.33	36.61	56.31	74.00	V
9614.000	37.72	14.41	27.14	36.53	61.52	74.00	V
4807.000	34.32	9.59	27.62	38.69	54.98	74.00	H
7210.500	34.88	12.15	27.33	36.29	55.99	74.00	H
9614.000	37.72	14.41	27.14	36.61	61.6	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4807.000	34.32	9.59	27.62	33.51	49.8	54.00	V
7210.500	34.88	12.15	27.33	21.83	41.53	54.00	V
9614.000	37.72	14.41	27.14	22.86	47.85	54.00	V
4807.000	34.32	9.59	27.62	31.35	47.64	54.00	H
7210.500	34.88	12.15	27.33	22.53	42.23	54.00	H
9614.000	37.72	14.41	27.14	23.62	48.61	54.00	H

## Test at Middle Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

### Horizontal:

Peak scan

Level (dB $\mu$ V/m)

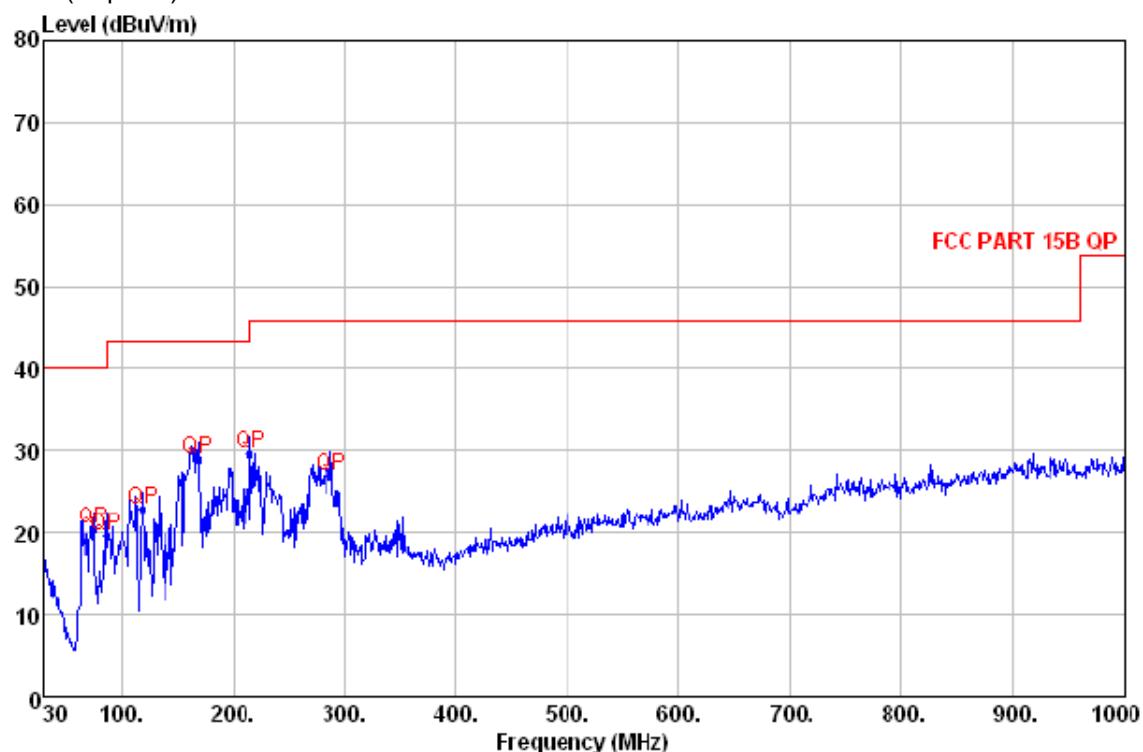

Quasi-peak measurement

No.	Freq	Level	Remark	Antenna	Cable	Limit	Margin A/pos T/pos		
				Factor	Loss	Line	dB	cm	deg
	MHz	dBuV/m		dB/m	dB	dBuV/m			
1	75.590	20.44	QP	7.40	1.02	40.00	-19.56	100	54
2	87.230	19.58	QP	7.93	1.09	40.00	-20.42	100	248
3	119.240	22.99	QP	7.77	1.29	43.50	-20.51	100	169
4	168.710	28.96	QP	8.17	1.55	43.50	-14.54	200	147
5	216.240	29.64	QP	9.65	1.78	46.00	-16.36	100	314
6	288.020	26.95	QP	13.42	2.08	46.00	-19.05	200	304

Level=Read Level + Antenna Factor + Cable Loss


### Test at Middle Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

#### Vertical:

Peak scan

Level (dB $\mu$ V/m)

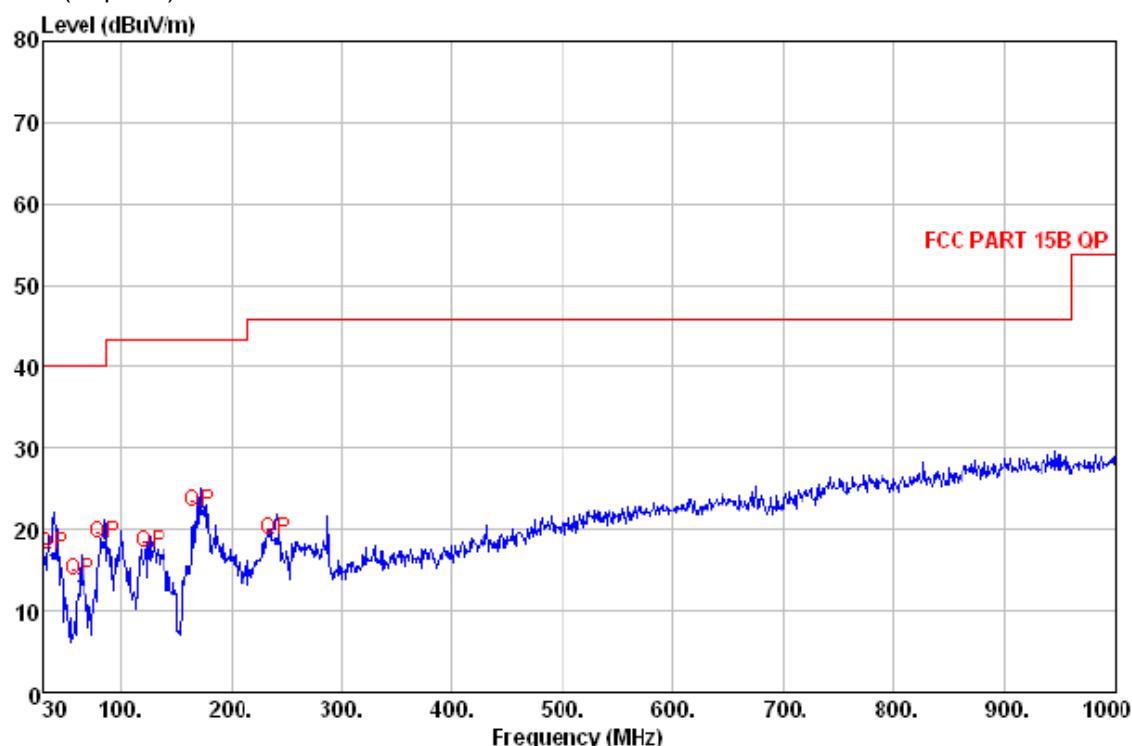

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin A/pos	T/pos	
				Factor	Loss	Line dB $\mu$ V/m	dB	cm	deg
1	39.700	16.99	QP	12.26	0.71	40.00	-23.01	100	289
2	63.950	13.88	QP	6.86	0.93	40.00	-26.12	100	157
3	86.260	18.22	QP	7.83	1.08	40.00	-21.78	100	88
4	127.000	17.18	QP	7.58	1.34	43.50	-26.32	200	309
5	172.590	22.19	QP	8.30	1.57	43.50	-21.31	200	226
6	241.460	18.77	QP	10.99	1.89	46.00	-27.23	200	147

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4880.800	34.33	9.59	27.60	39.31	55.63	74.00	V
7321.200	34.92	12.17	27.31	37.63	57.41	74.00	V
9761.600	37.91	14.49	27.13	36.36	61.63	74.00	V
4880.800	34.33	9.59	27.60	39.82	56.14	74.00	H
7321.200	34.92	12.17	27.31	36.11	55.89	74.00	H
9761.600	37.91	14.49	27.13	36.12	61.39	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4880.800	34.33	9.59	27.60	33.61	49.93	54.00	V
7321.200	34.92	12.17	27.31	20.68	40.46	54.00	V
9761.600	37.91	14.49	27.13	24.61	49.88	54.00	V
4880.800	34.33	9.59	27.60	32.85	49.17	54.00	H
7321.200	34.92	12.17	27.31	21.19	40.97	54.00	H
9761.600	37.91	14.49	27.13	25.48	50.75	54.00	H

## Test at high Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

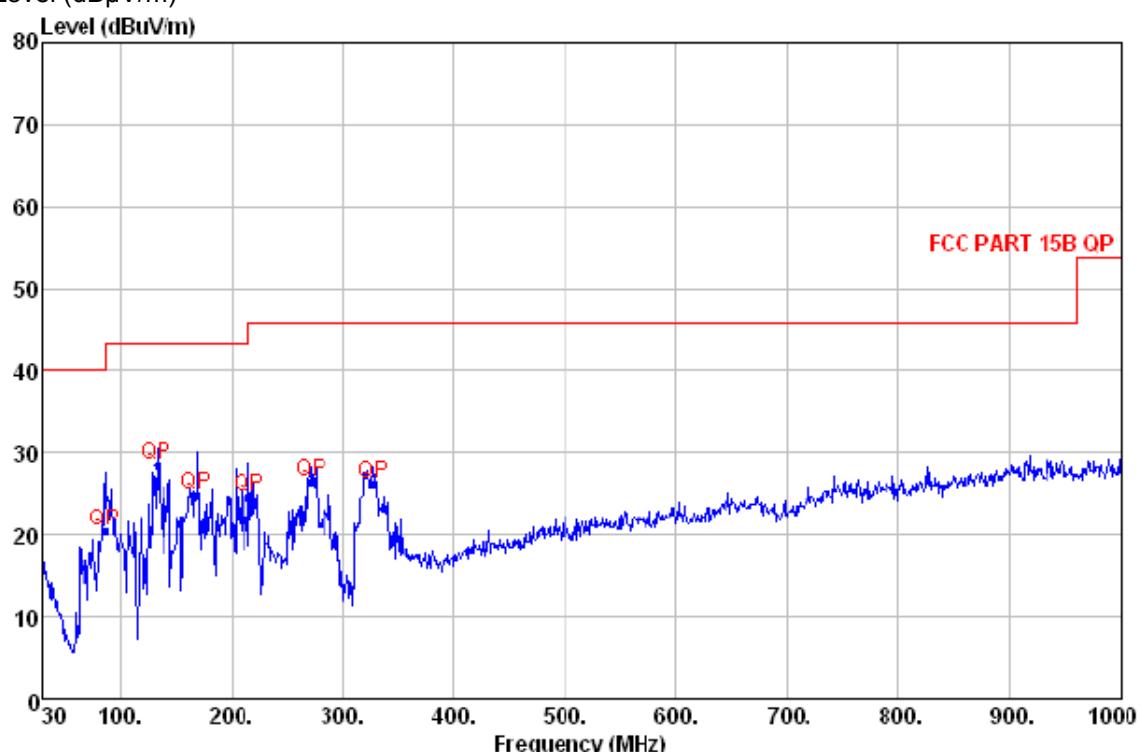

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor	Loss dB/m	Line dB $\mu$ V/m	dB	cm	deg
1	87.230	20.58	QP	7.93	1.09	40.00	-19.42	100	248
2	132.820	28.50	QP	7.40	1.37	43.50	-15.00	100	254
3	168.710	24.96	QP	8.17	1.55	43.50	-18.54	200	147
4	216.240	24.64	QP	9.65	1.78	46.00	-21.36	100	314
5	271.530	26.41	QP	12.88	2.01	46.00	-19.59	200	199
6	327.790	26.21	QP	14.00	2.21	46.00	-19.79	200	124

Level=Read Level + Antenna Factor + Cable Loss


## Test at High Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

### Vertical:

Peak scan

Level (dB $\mu$ V/m)

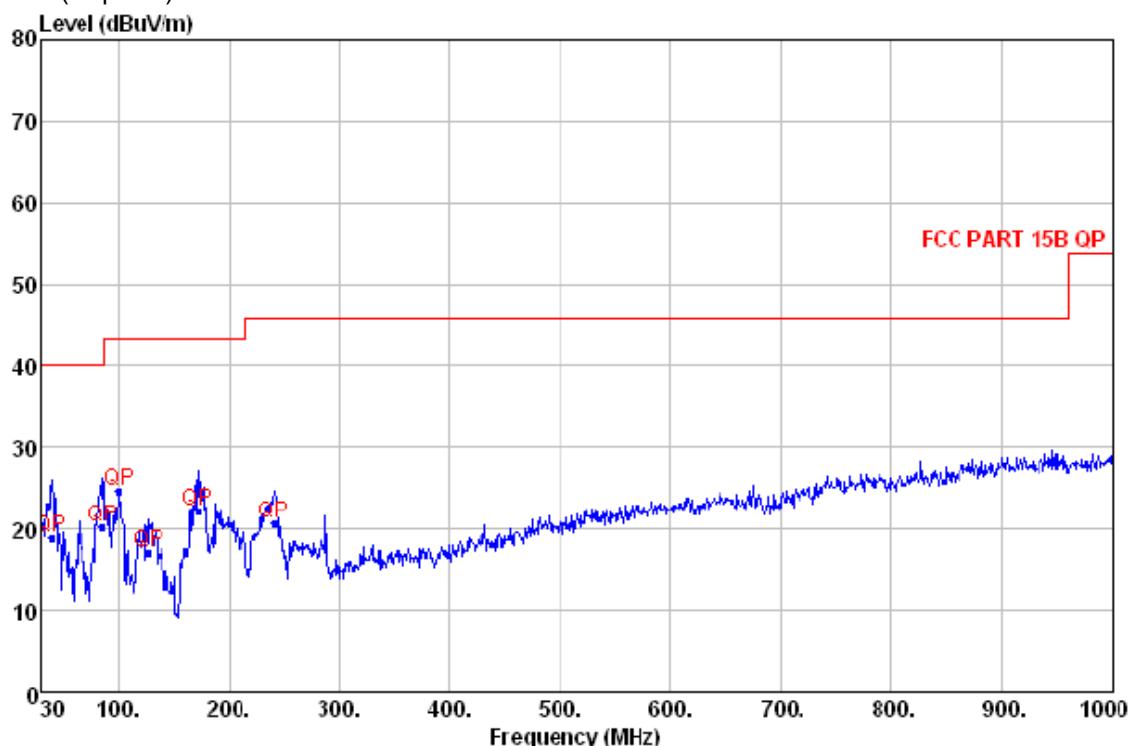

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin A/pos	T/pos	
				Factor dB/m	Loss dB	Line dB $\mu$ V/m	dB	cm	deg
1	39.700	18.99	QP	12.26	0.71	40.00	-21.01	100	200
2	86.260	20.22	QP	7.83	1.08	40.00	-19.78	100	88
3	100.810	24.83	QP	8.67	1.18	43.50	-18.67	100	210
4	127.000	17.18	QP	7.58	1.34	43.50	-26.32	200	314
5	172.590	22.19	QP	8.30	1.57	43.50	-21.31	200	245
6	241.460	20.77	QP	10.99	1.89	46.00	-25.23	200	188

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4954.600	34.36	9.60	27.61	38.98	55.33	74.00	V
7431.900	34.98	12.19	27.30	36.77	56.64	74.00	V
9909.200	37.96	14.52	27.11	36.72	62.09	74.00	V
4954.600	34.36	9.60	27.61	39.25	55.6	74.00	H
7431.900	34.98	12.19	27.30	37.22	57.09	74.00	H
9909.200	37.96	14.52	27.11	36.65	62.02	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4954.600	34.36	9.60	27.61	35.62	51.97	54.00	V
7431.900	34.98	12.19	27.30	22.89	42.76	54.00	V
9909.200	37.96	14.52	27.11	21.09	46.46	54.00	V
4954.600	34.36	9.60	27.61	33.69	50.04	54.00	H
7431.900	34.98	12.19	27.30	22.28	42.15	54.00	H
9909.200	37.96	14.52	27.11	22.63	48	54.00	H

## Test at Receiving status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

### Horizontal:

Peak scan

Level (dB $\mu$ V/m)

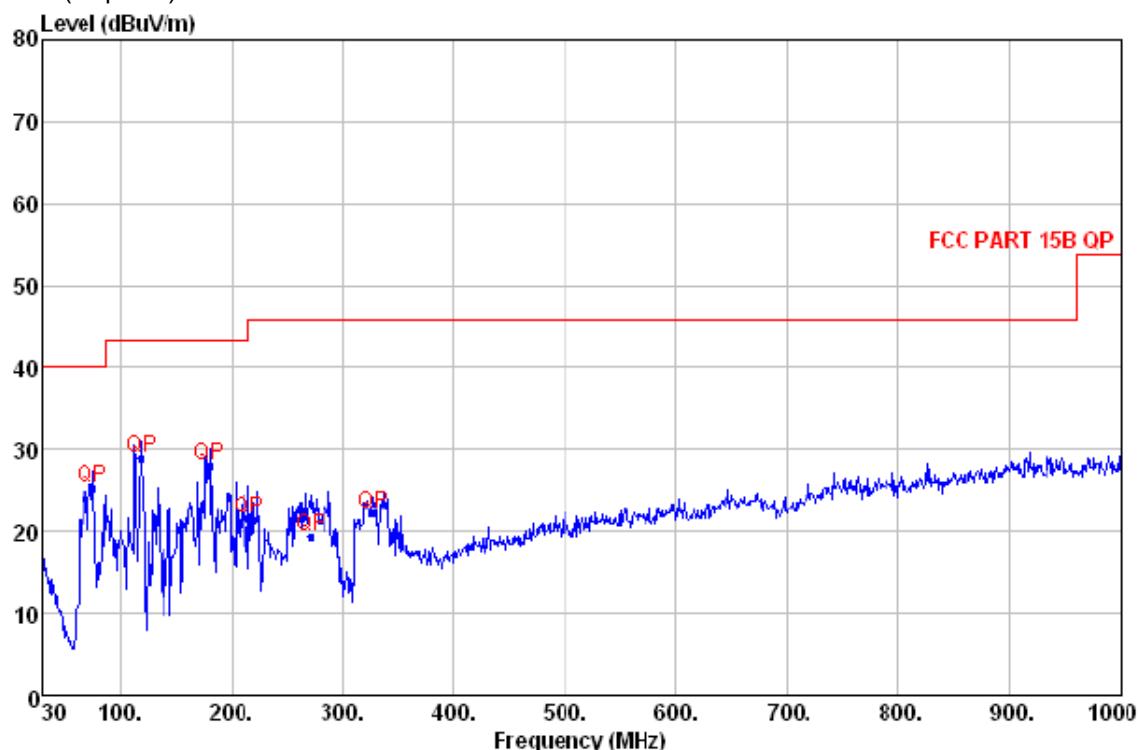

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor dB/m	Loss dB	Line dBuV/m	dB	cm	deg
1	75.590	25.44	QP	7.40	1.02	40.00	-14.56	100	164
2	119.240	28.99	QP	7.77	1.29	43.50	-14.51	100	75
3	180.350	28.07	QP	8.30	1.61	43.50	-15.43	100	247
4	216.240	21.64	QP	9.65	1.78	46.00	-24.36	200	314
5	271.530	19.41	QP	12.88	2.01	46.00	-26.59	200	199
6	327.790	22.21	QP	14.00	2.21	46.00	-23.79	200	147

Level=Read Level + Antenna Factor + Cable Loss


## Test at Receiving status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

### Vertical:

Peak scan

Level (dB $\mu$ V/m)

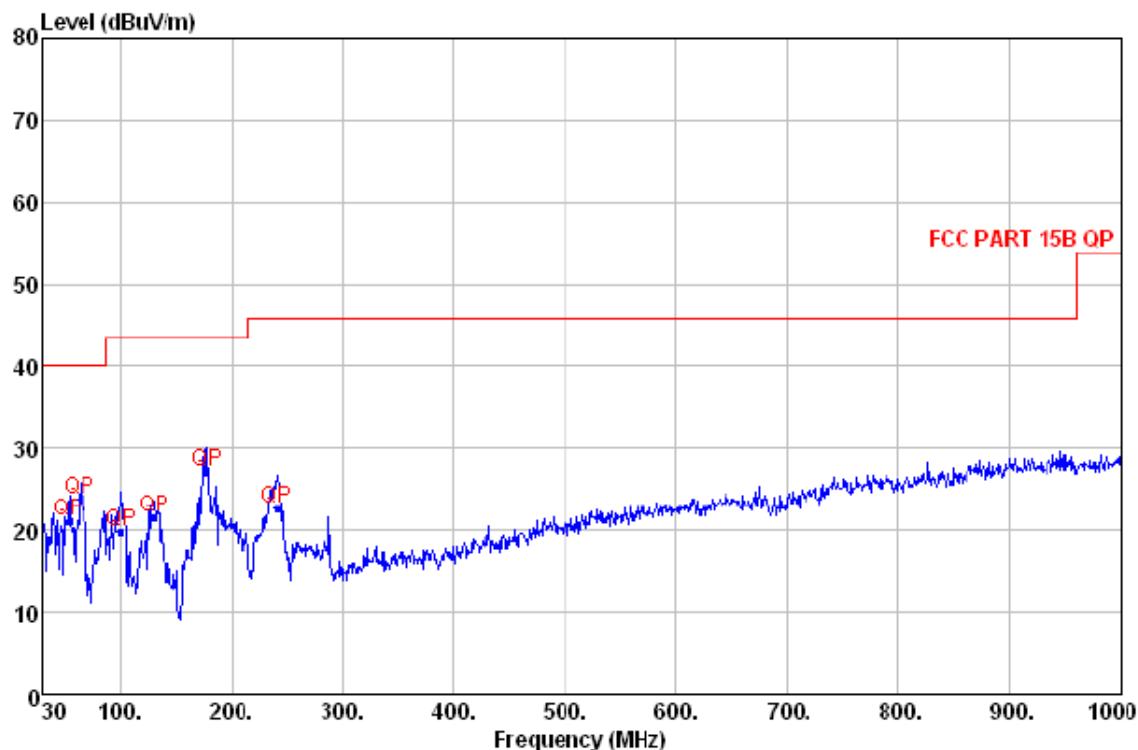

Quasi-peak measurement

No.	Freq MHz	Level dB $\mu$ V/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor	Loss	dB $\mu$ V/m	dB	cm	deg
1	54.250	21.19	QP	7.56	0.84	40.00	-18.81	100	86
2	63.950	23.88	QP	6.86	0.93	40.00	-16.12	100	347
3	100.810	19.83	QP	8.67	1.18	43.50	-23.67	100	106
4	130.880	21.71	QP	7.40	1.36	43.50	-21.79	200	265
5	178.410	27.11	QP	8.27	1.60	43.50	-16.39	200	198
6	241.460	22.77	QP	10.99	1.89	46.00	-23.23	200	147

Level=Read Level + Antenna Factor + Cable Loss

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

No emission is found in the 1-25GHz

Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

**Test result: The unit does meet the FCC and RSS-210 requirements.**

## 5.10 Radiated Emissions which fall in the restricted bands

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 and RSS-210  (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
<b>Test Method:</b>	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705
<b>Test Status:</b>	Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.  For 2.4G FSK module, Channel lowest (2403.5MHz), middle (2440.4MHz) and highest (2477.3MHz) are chosen for 2.4G FSK wireless module full testing.
<b>Measurement Distance:</b>	3m (Semi-Anechoic Chamber)
<b>Limit:</b>	Section 15.209(a)  40.0 dB $\mu$ V/m between 30MHz & 88MHz;  43.5 dB $\mu$ V/m between 88MHz & 216MHz;  46.0 dB $\mu$ V/m between 216MHz & 960MHz;  54.0 dB $\mu$ V/m above 960MHz.
<b>Detector:</b>	For PK value:  RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto  Detector function = peak  Trace = max hold  For AV value:  RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10 Hz Sweep = auto  Detector function = peak  Trace = max hold

**Test Result:****For bluetooth****1. Low Channel(2402MHz)**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.31	21.38	40.63	26.7
2390.000	26.56	6.46	27.79	35.16	21.52	40.39	26.75
2500.000	25.70	6.62	27.80	35.82	21.88	40.34	26.4
2483.500	25.79	6.61	27.80	35.19	21.67	39.79	26.27

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.74	21.58	41.06	26.9
2390.000	26.56	6.46	27.79	35.25	21.31	40.48	26.54
2500.000	25.70	6.62	27.80	35.66	21.26	40.18	25.78
2483.500	25.79	6.61	27.80	35.70	21.62	40.3	26.22

**2. Middle Channel(2441MHz)**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.26	21.21	40.58	26.53
2390.000	26.56	6.46	27.79	35.53	21.36	40.76	26.59
2500.000	25.70	6.62	27.80	35.27	21.82	39.79	26.34
2483.500	25.79	6.61	27.80	35.21	21.91	39.81	26.51

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.28	21.82	40.6	27.14
2390.000	26.56	6.46	27.79	35.51	21.28	40.74	26.51
2500.000	25.70	6.62	27.80	35.58	21.73	40.1	26.25
2483.500	25.79	6.61	27.80	35.33	21.91	39.93	26.51

**3. High Channel(2480MHz)**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.63	21.18	40.95	26.5
2390.000	26.56	6.46	27.79	35.28	21.30	40.51	26.53
2500.000	25.70	6.62	27.80	35.82	21.65	40.34	26.17
2483.500	25.79	6.61	27.80	35.60	21.72	40.2	26.32

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.46	21.33	40.78	26.65
2390.000	26.56	6.46	27.79	35.74	21.52	40.97	26.75
2500.000	25.70	6.62	27.80	35.58	21.61	40.1	26.13
2483.500	25.79	6.61	27.80	35.61	21.78	40.21	26.38

For 2.G FSK module

**1. Low Channel(2403.5MHz)**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.26	21.28	40.58	26.6
2390.000	26.56	6.46	27.79	35.42	21.51	40.65	26.74
2500.000	25.70	6.62	27.80	35.36	21.61	39.88	26.13
2483.500	25.79	6.61	27.80	35.52	21.72	40.12	26.32

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.63	21.28	40.95	26.6
2390.000	26.56	6.46	27.79	35.22	21.53	40.45	26.76
2500.000	25.70	6.62	27.80	35.75	21.61	40.27	26.13
2483.500	25.79	6.61	27.80	35.71	21.38	40.31	25.98

**2. Middle Channel(2440.4MHz)**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.35	21.18	40.67	26.5
2390.000	26.56	6.46	27.79	35.51	21.62	40.74	26.85
2500.000	25.70	6.62	27.80	35.55	21.28	40.07	25.8
2483.500	25.79	6.61	27.80	35.62	21.83	40.22	26.43

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.32	21.16	40.64	26.48
2390.000	26.56	6.46	27.79	35.28	21.26	40.51	26.49
2500.000	25.70	6.62	27.80	35.77	21.51	40.29	26.03
2483.500	25.79	6.61	27.80	35.36	21.28	39.96	25.88

**3. High Channel(2477.3MHz)**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.18	21.32	40.5	26.64
2390.000	26.56	6.46	27.79	35.27	21.26	40.5	26.49
2500.000	25.70	6.62	27.80	35.69	21.63	40.21	26.15
2483.500	25.79	6.61	27.80	35.52	21.75	40.12	26.35

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	26.65	6.45	27.78	35.36	21.38	40.68	26.7
2390.000	26.56	6.46	27.79	35.71	21.22	40.94	26.45
2500.000	25.70	6.62	27.80	35.43	21.28	39.95	25.8
2483.500	25.79	6.61	27.80	35.62	21.33	40.22	25.93

Remark: No any other emission which falls in restricted bands can be detected and be reported.

**Test result: The unit does meet the FCC and RSS-210 requirements.**

## 5.11 Band Edges Requirement

**Test Requirement:** FCC Part15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Frequency Band:** 2400 MHz to 2483.5 MHz

**Test Method:** ANSI C63.10: Clause 6.9 & DA 00-705

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in continuous transmitting mode with normal (DH5) and EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

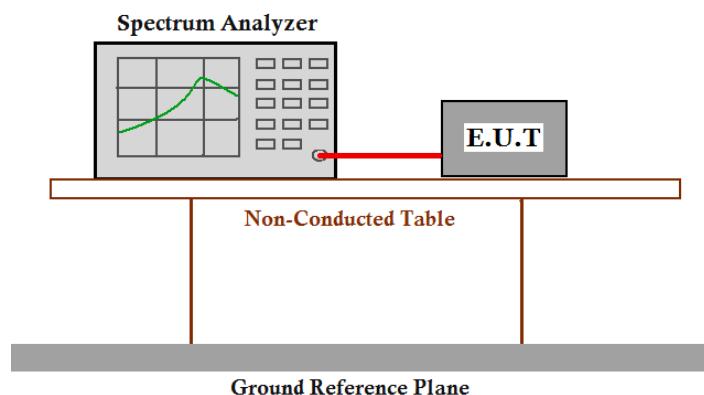

**Test Procedure:**

Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge.

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.

The graph as below. Represents the emissions take for this device.

## For Bluetooth


DH5:

### Low channel:



DH5:

### High channel:

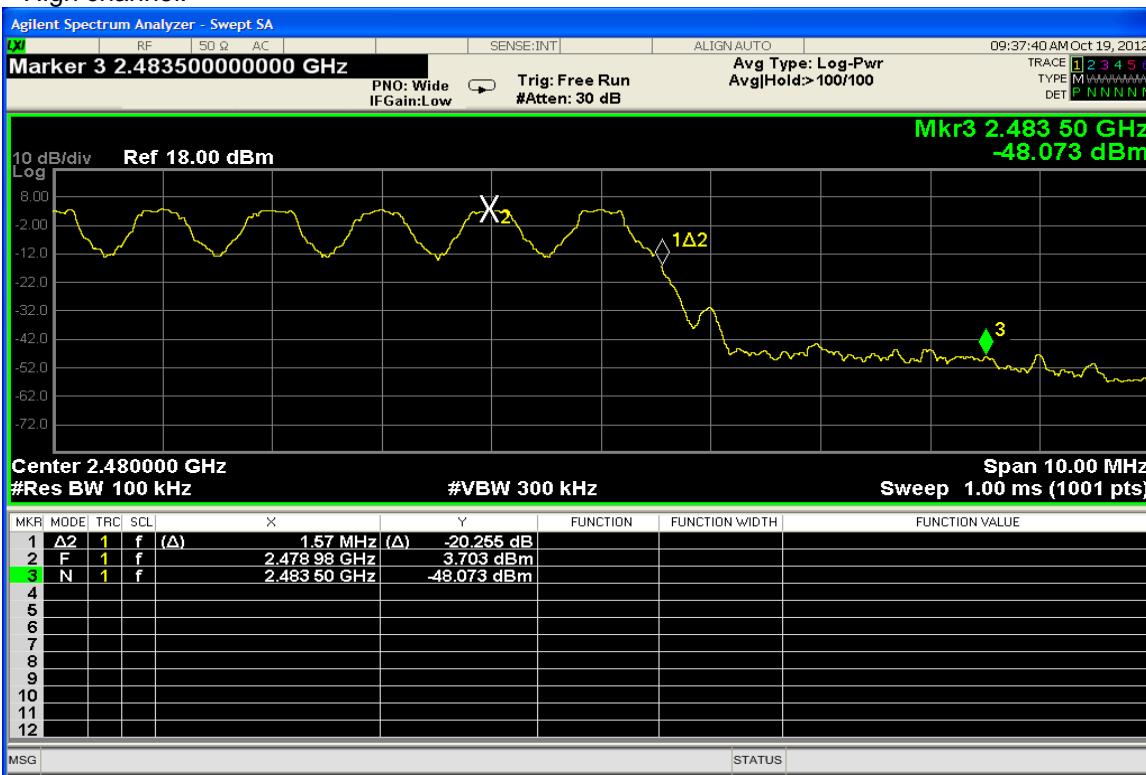

3DH5:  
Low channel:



High channel:



## For 2.4G FSK wireless module

Low channel:



High channel:



Test result: The unit does meet the FCC requirements.

## 5.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

**Test Requirement:** FCC Part 15 C section 15.207 and RSS-GEN

**Test Method:** ANSI C63.10: Clause 6.2 & DA 00-705

**Frequency Range:** 150 kHz to 30 MHz

**Detector:** Peak for pre-scan (9 kHz Resolution Bandwidth)

### Test Limit


**Limits for conducted disturbance at the mains ports of class B**

<b>Frequency Range</b>	<b>Class B Limit dB(µV)</b>	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**EUT Operation:** Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

## Test Configuration:

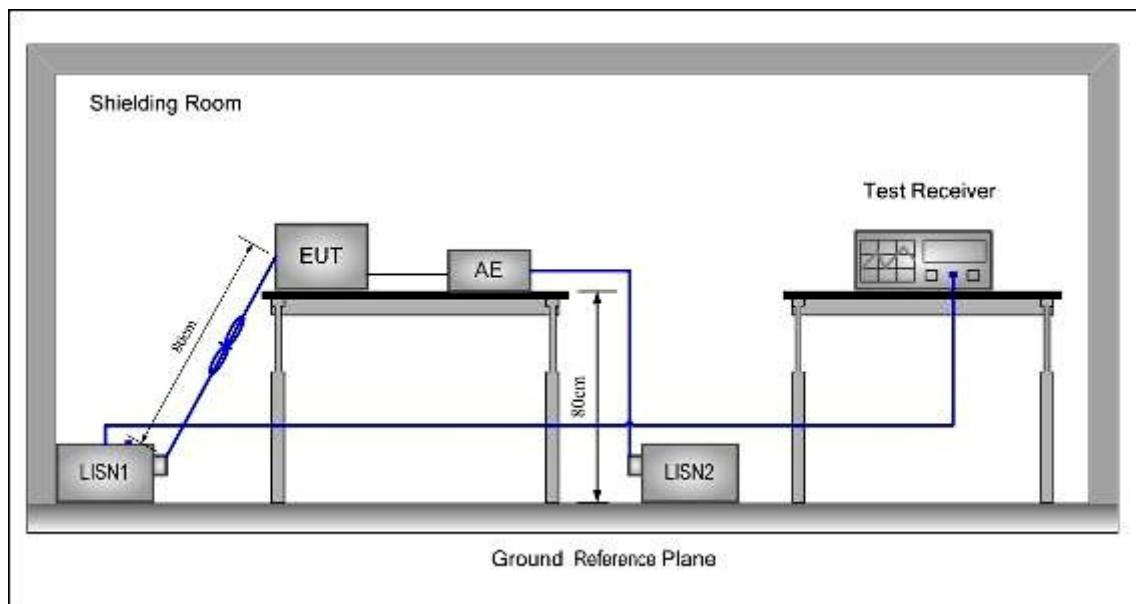

### **Test procedure:**

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

### 5.12.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.


**The following Quasi-Peak and Average measurements were performed on the EUT:**

**Model: Soundbar (Power supply: JQH, type: NER-SPM00-217)**

**Live line**

Peak Scan:

Level (dB $\mu$ V)

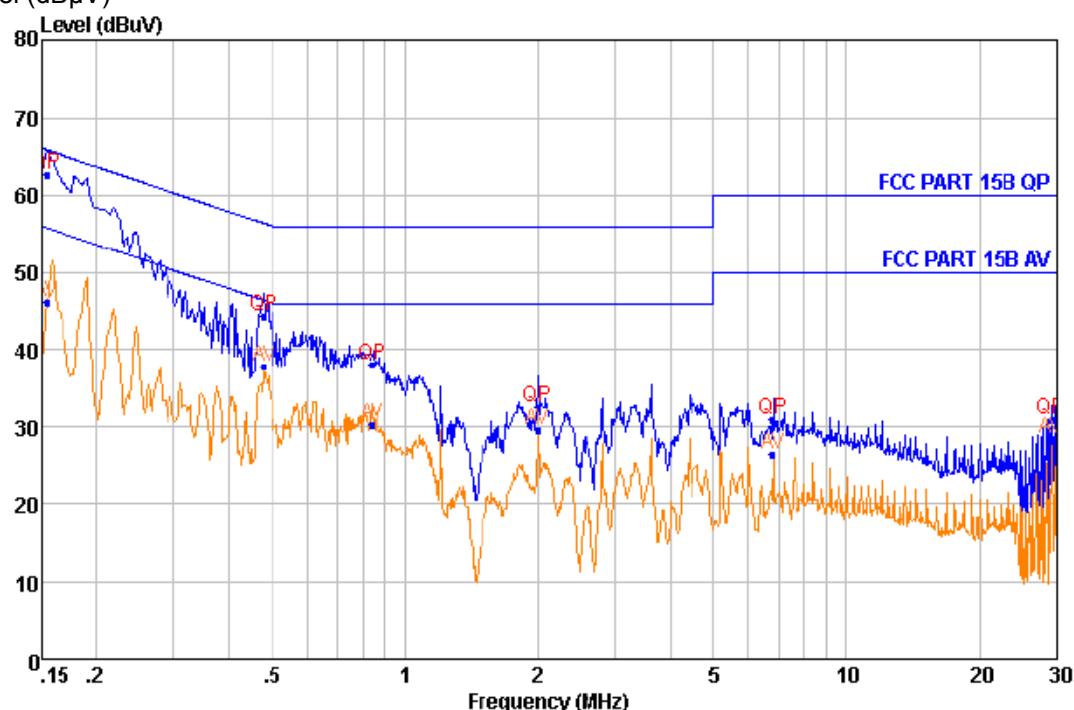

Quasi-peak and Average measurement


NO.	Freq MHz	Level dB $\mu$ V	Remark	LISN Factor dB	Cable Loss dB	Limit Line dB $\mu$ V	Margin dB
1	0.154	62.58	QP	9.70	0.20	65.80	-3.22
2	0.154	46.15	Average	9.70	0.20	55.80	-9.65
3	0.478	44.32	QP	9.65	0.27	56.38	-12.06
4	0.478	37.89	Average	9.65	0.27	46.38	-8.49
5	0.842	38.19	QP	9.69	0.30	56.00	-17.81
6	0.842	30.34	Average	9.69	0.30	46.00	-15.66
7	2.000	32.59	QP	9.65	0.35	56.00	-23.41
8	2.000	29.61	Average	9.65	0.35	46.00	-16.39
9	6.793	31.06	QP	9.69	0.42	60.00	-28.94
10	6.793	26.59	Average	9.69	0.42	50.00	-23.41
11	29.139	31.03	QP	9.65	0.50	60.00	-28.97
12	29.139	28.61	Average	9.65	0.50	50.00	-21.39

Level=Read Level + List Factor + Cable Loss

### Neutral Line

Peak Scan:

Level (dB $\mu$ V)

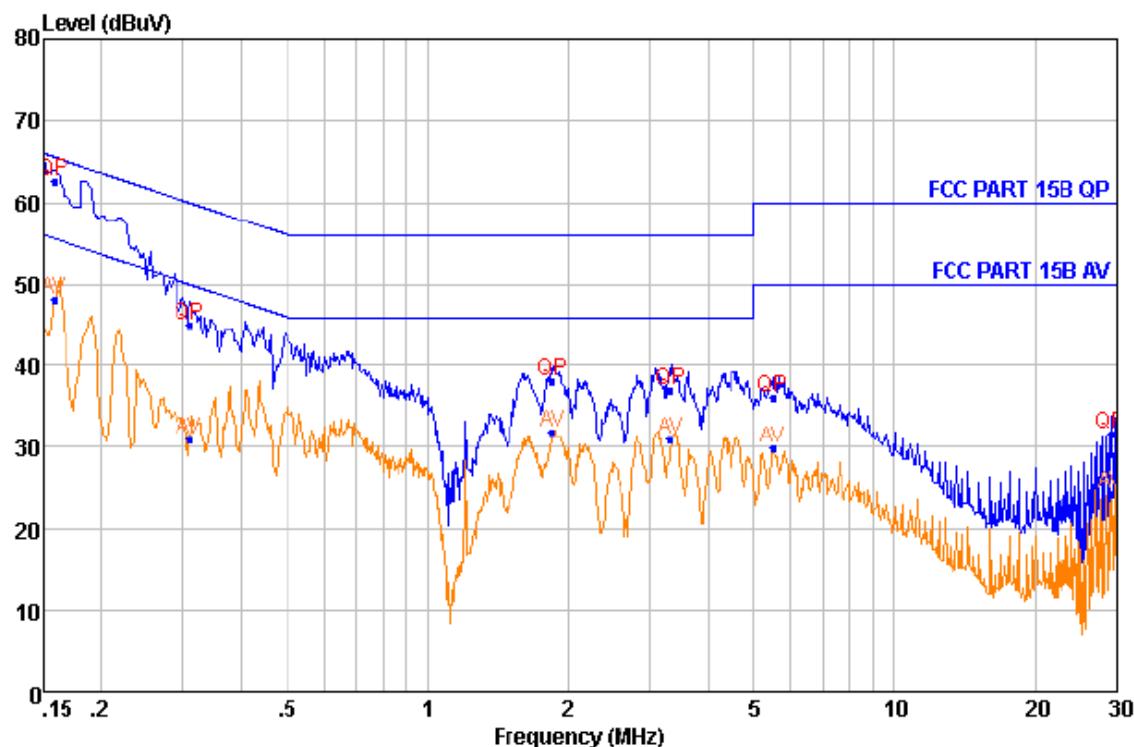

Quasi-peak and Average measurement

NO.	Freq MHz	Level dB $\mu$ V	Remark	LISM Factor dB	Cable Loss dB	Limit Line dB $\mu$ V	Margin dB
1	0.158	62.68	QP	9.70	0.20	65.58	-2.90
2	0.158	48.18	Average	9.70	0.20	55.58	-7.40
3	0.309	45.09	QP	9.65	0.24	59.99	-14.90
4	0.309	30.91	Average	9.65	0.24	49.99	-19.08
5	1.854	38.17	QP	9.62	0.34	56.00	-17.83
6	1.854	31.89	Average	9.62	0.34	46.00	-14.11
7	3.320	36.91	QP	9.62	0.38	56.00	-19.09
8	3.320	30.87	Average	9.62	0.38	46.00	-15.13
9	5.495	36.06	QP	9.62	0.40	60.00	-23.94
10	5.495	29.78	Average	9.62	0.40	50.00	-20.22
11	29.139	31.57	QP	9.62	0.50	60.00	-28.43
12	29.139	24.31	Average	9.62	0.50	50.00	-25.69


Level=Read Level + Lism Factor + Cable Loss

Model: Soundbar (Power supply: Hanwei, type: Hanny13w70)

Live line

Peak Scan:

Level (dB $\mu$ V)

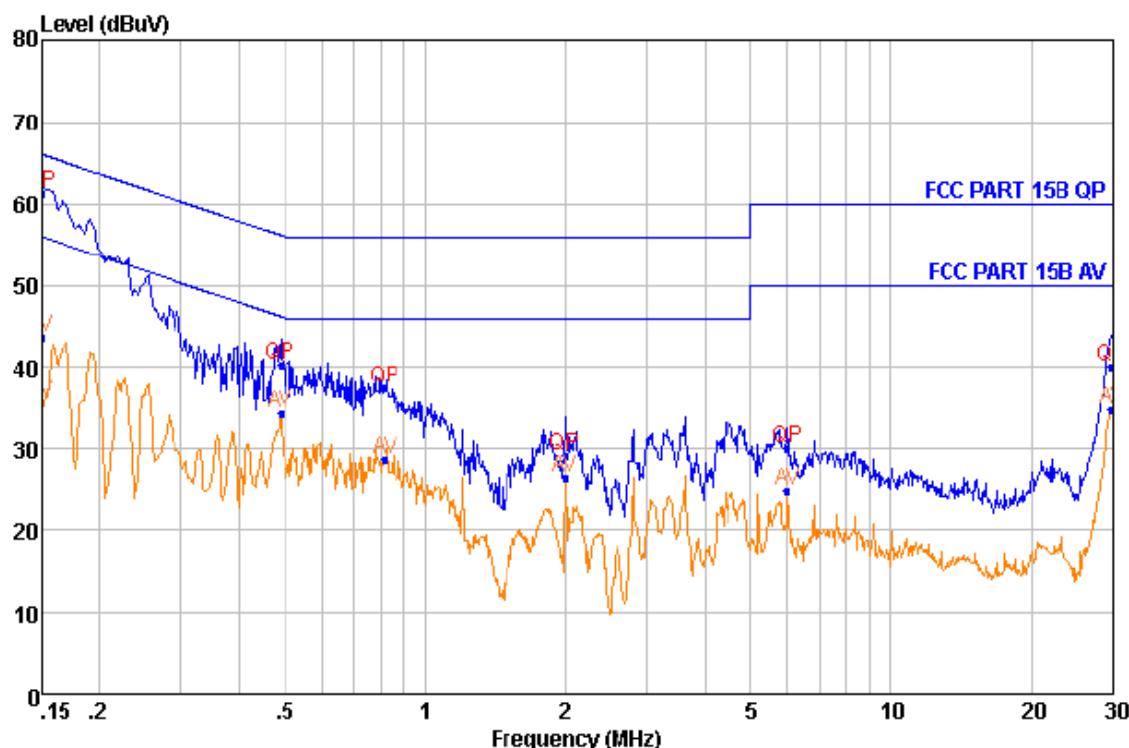

## Quasi-peak and Average measurement


NO.	Freq MHz	Level dBuV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBuV	Margin dB
1	0.150	61.24	QP	9.70	0.20	66.00	-4.76
2	0.150	43.64	Average	9.70	0.20	56.00	-12.36
3	0.488	40.30	QP	9.65	0.27	56.20	-15.90
4	0.488	34.29	Average	9.65	0.27	46.20	-11.91
5	0.820	37.49	QP	9.69	0.30	56.00	-18.51
6	0.820	28.82	Average	9.69	0.30	46.00	-17.18
7	2.000	29.24	QP	9.65	0.35	56.00	-26.76
8	2.000	26.56	Average	9.65	0.35	46.00	-19.44
9	5.981	30.10	QP	9.65	0.41	60.00	-29.90
10	5.981	25.05	Average	9.65	0.41	50.00	-24.95
11	29.772	40.13	QP	9.65	0.50	60.00	-19.87
12	29.772	34.85	Average	9.65	0.50	50.00	-15.15

Level=Read Level + Lism Factor + Cable Loss

## Neutral Line

Peak Scan:

Level (dB $\mu$ V)

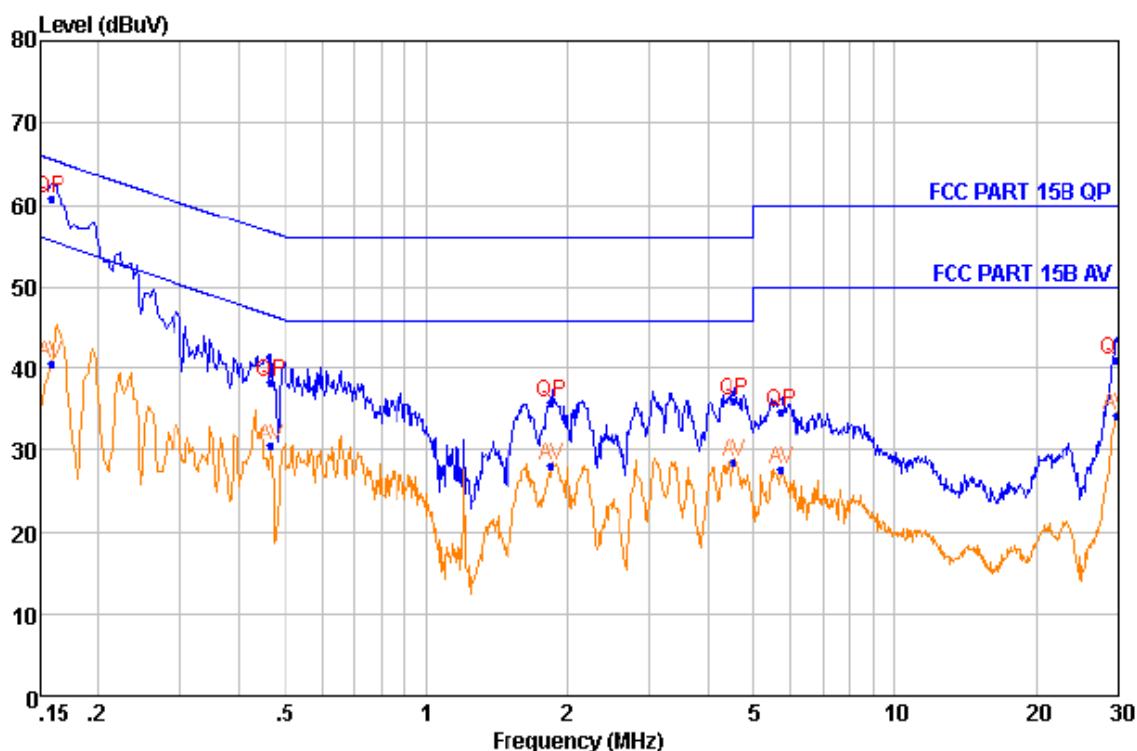

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBuV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBuV	Margin dB
1	0.158	60.84	QP	9.70	0.20	65.58	-4.74
2	0.158	40.61	Average	9.70	0.20	55.56	-14.95
3	0.465	38.30	QP	9.67	0.26	56.60	-18.30
4	0.465	30.53	Average	9.67	0.26	46.60	-16.07
5	1.854	35.91	QP	9.62	0.34	56.00	-20.09
6	1.854	28.07	Average	9.62	0.34	46.00	-17.93
7	4.541	36.08	QP	9.62	0.39	56.00	-19.92
8	4.541	28.52	Average	9.62	0.39	46.00	-17.48
9	5.730	34.85	QP	9.62	0.41	60.00	-25.15
10	5.730	27.52	Average	9.62	0.41	50.00	-22.48
11	29.608	41.04	QP	9.62	0.50	60.00	-18.96
12	29.608	34.31	Average	9.62	0.50	50.00	-15.69

Level=Read Level + Lison Factor + Cable Loss

--End of Report--