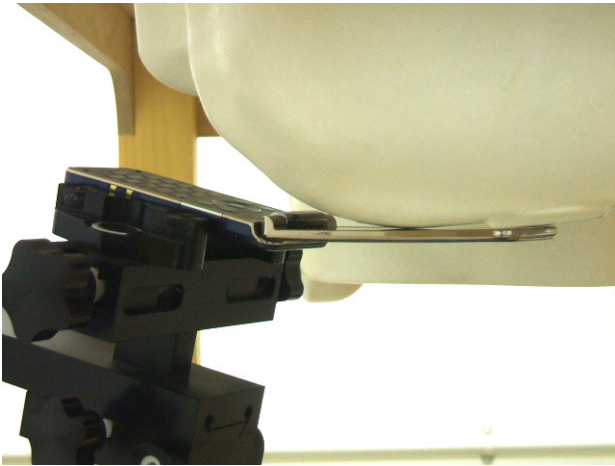
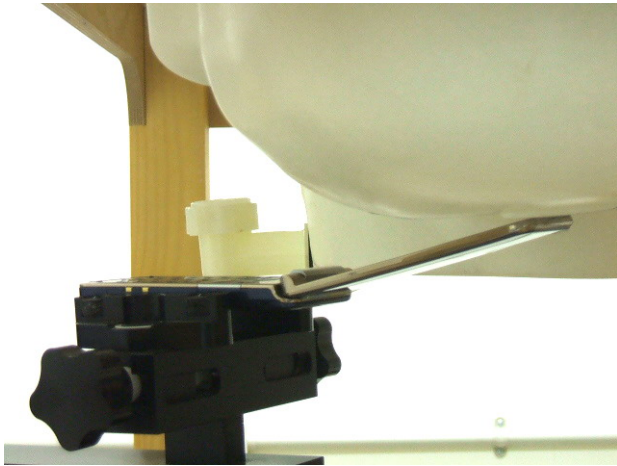
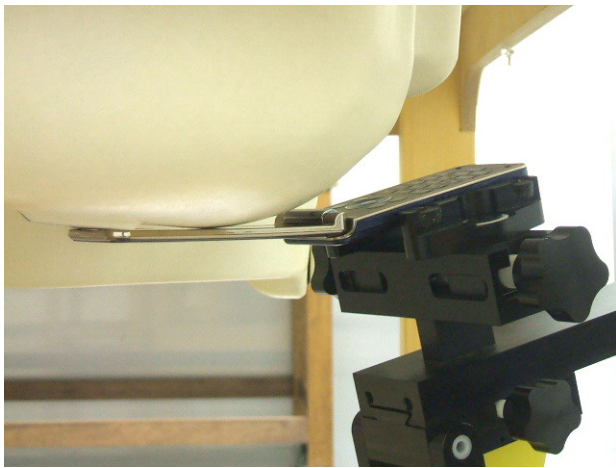
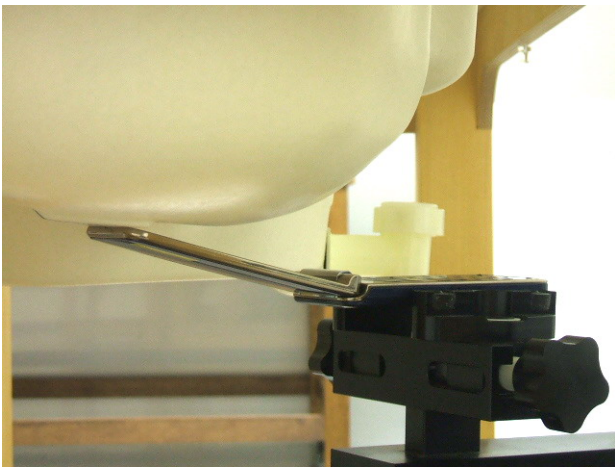


A.3 SAR Measurement Data


A.3.1 Left Head

							
Cheek/Touch Position	Ear/Tilt Position						
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : May 12, 2008		
Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.10	-0.012		0.448	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.10	-0.062		0.218	22.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. Please refer to attachment for the result presentation in plot format.							

A.3.2 Right Head

							
Cheek/Touch Position				Ear/Tilt Position			
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : May 12, 2008		
Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	29.09	-0.061	1.6	0.485	22.0
	0661	1880.00	29.10	-0.003		0.463	22.0
	0810	1909.80	29.02	-0.061		0.458	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.10	-0.089		0.176	22.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. Please refer to attachment for the result presentation in plot format.							

A.3.3 Body-worn Position

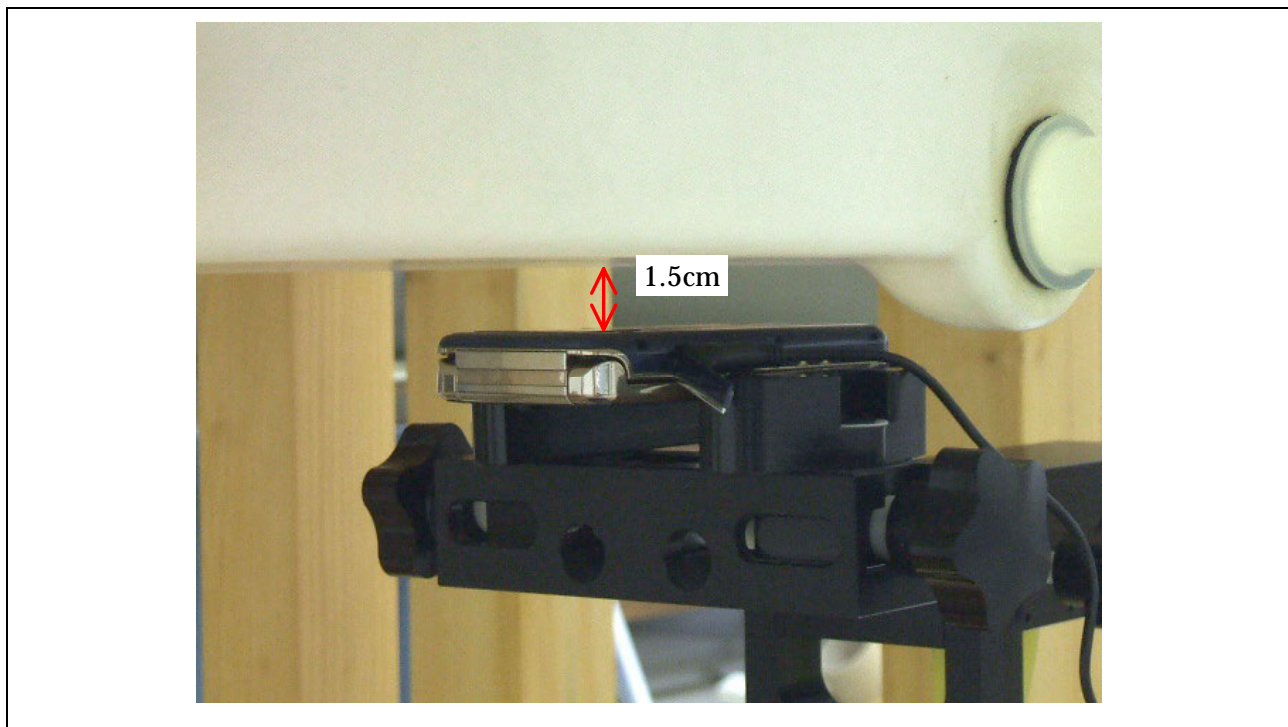

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)

Date : May 19, 2008

Separation Distance	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.10	-0.015		0.161	23.0
	0810	1909.80	--	--		**	--

GSM 1900 GSM+GPRS (Duty Cycle: 25.0 %, Crest Factor: 4)

1.5 cm	0512	1850.20	29.02	-0.101	1.6	0.308	23.0
	0661	1880.00	29.03	-0.089		0.293	23.0
	0810	1909.80	28.94	-0.008		0.281	23.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.