

Appendix 2 – Highest SAR Test Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

189ch / GSM 850 - GPRS 4slots

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 836.4 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.425$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.38, 6.38, 6.38); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Head/Left Touched/Area Scan (11x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0511 W/kg

Head/Left Touched/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.472 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.0600 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.038 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0513 W/kg

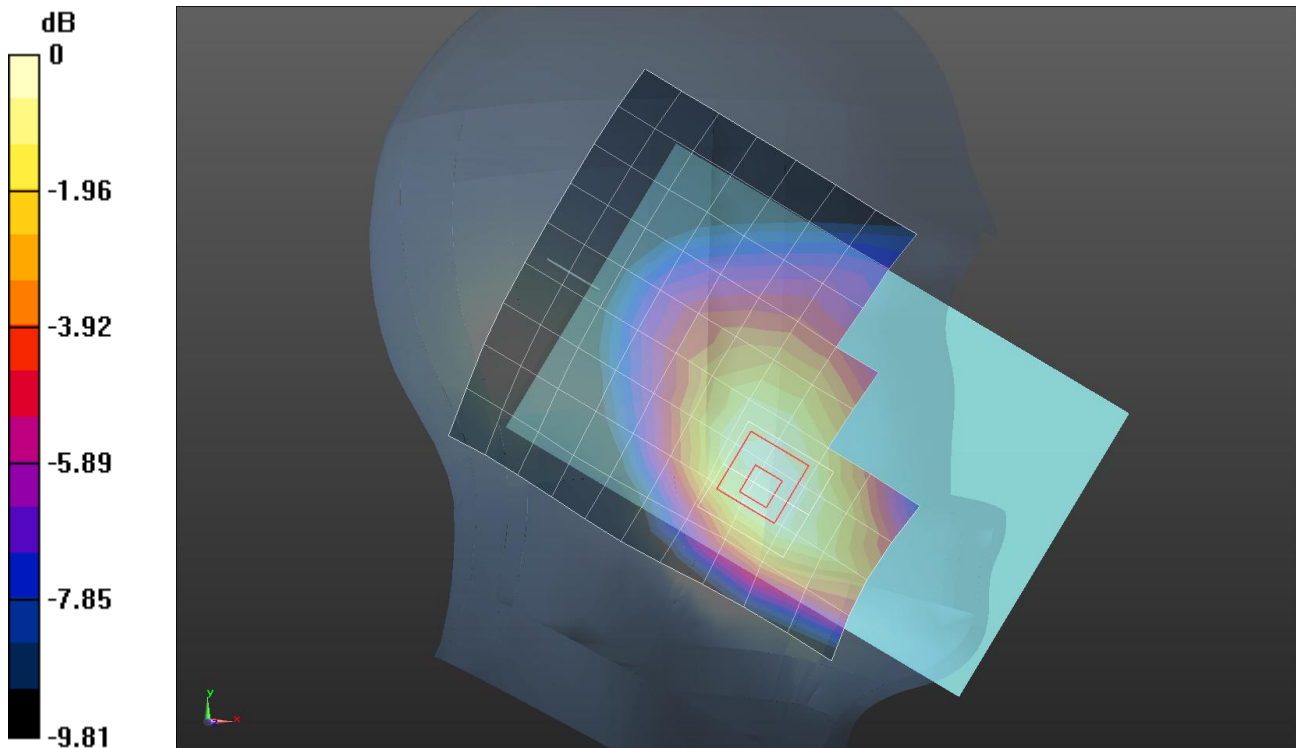

0 dB = 0.0513 W/kg = -12.90 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

189ch / GSM 850 - GPRS 4slots

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 004401115115202

Frequency: 836.4 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 54.883$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.04, 6.04, 6.04); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear/Area Scan (11x16x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 W/kg

Body/Rear/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.920 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.640 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 W/kg

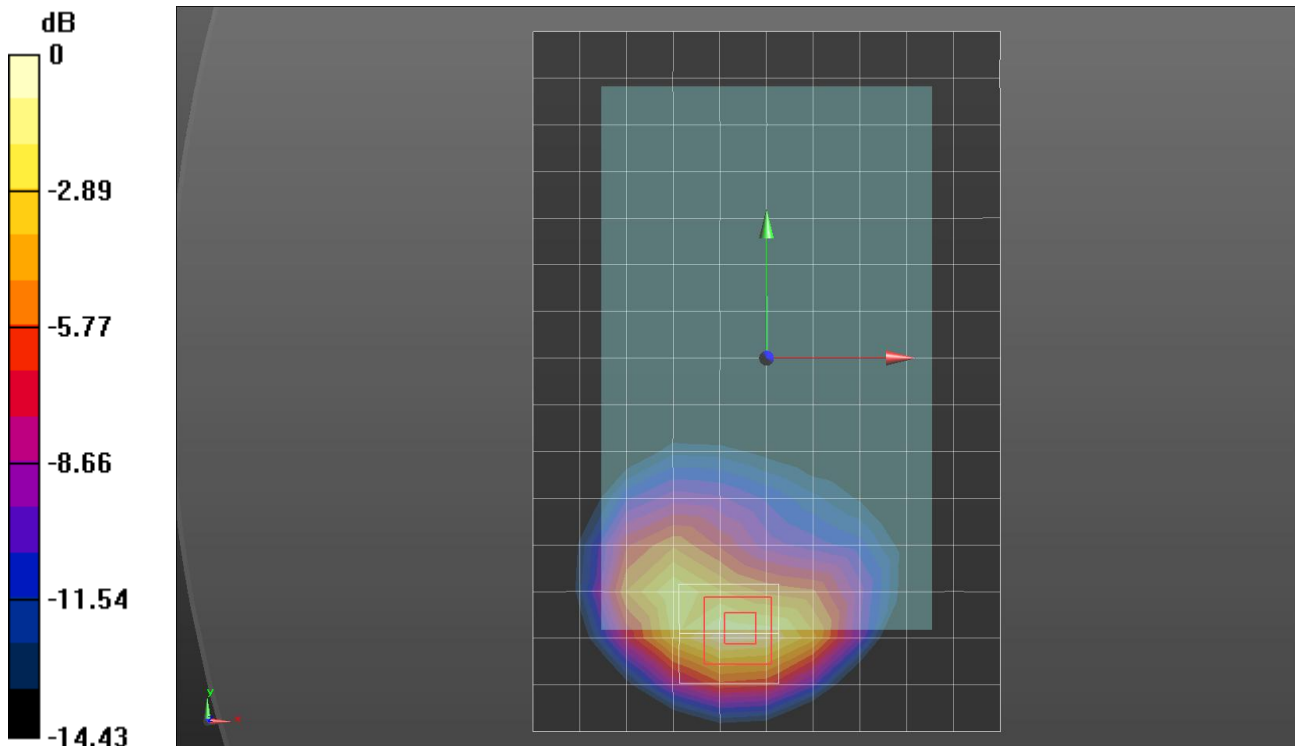

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

189ch / GSM 850 - GPRS 4slots

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 836.4 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.983$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.04, 6.04, 6.04); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear w/headset/Area Scan (11x16x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 W/kg

Body/Rear w/headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 35.306 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.655 W/kg

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.31 W/kg

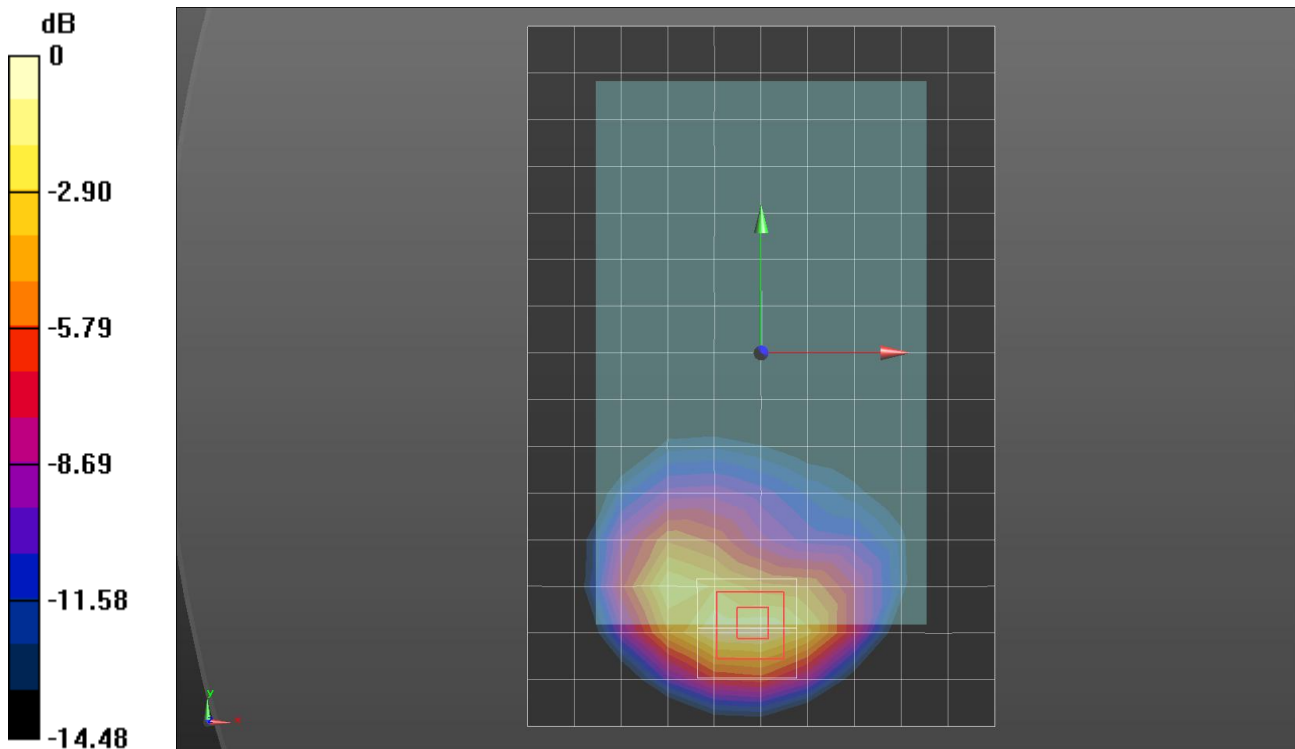

0 dB = 1.31 W/kg = 1.17 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 38.896$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.04, 5.04, 5.04); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Head/Left Touched/Area Scan (13x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00624 W/kg


Head/Left Touched/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.319 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.00596 W/kg; SAR(10 g) = 0.00381 W/kg

Maximum value of SAR (measured) = 0.00649 W/kg

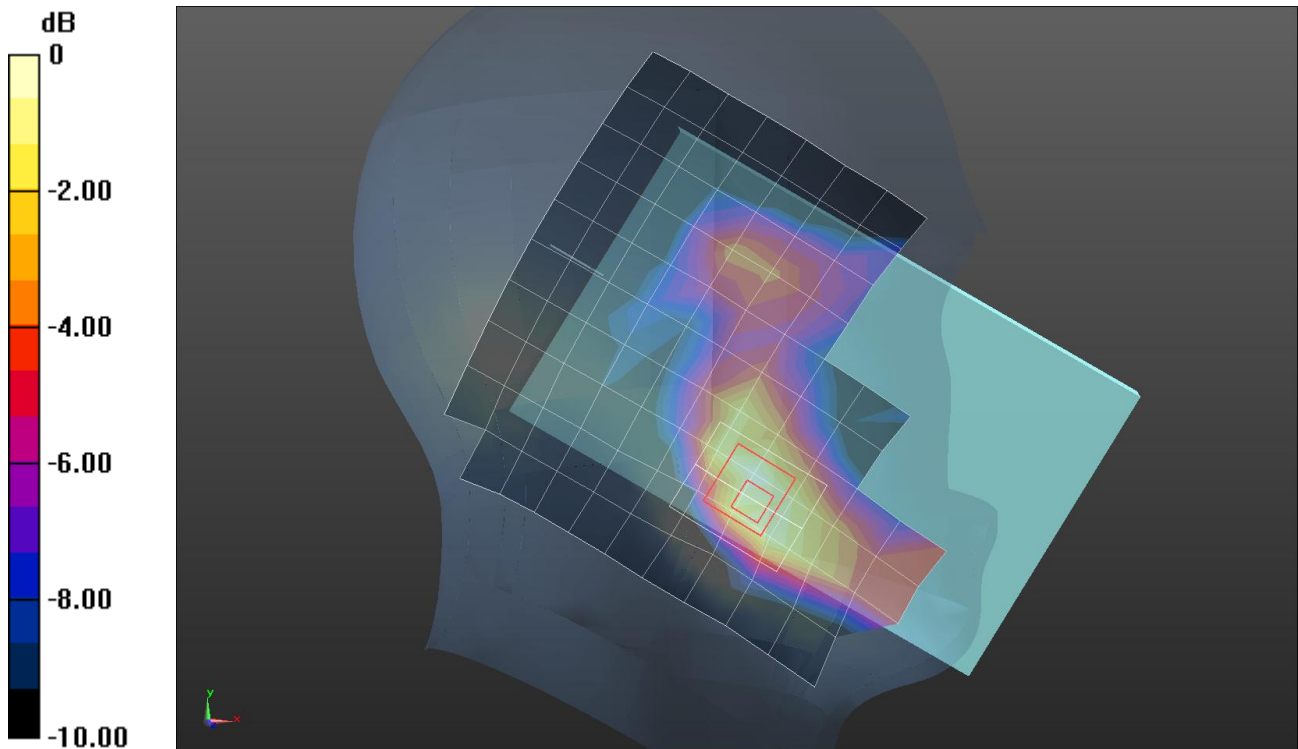

0 dB = 0.00649 W/kg = -21.88 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

512ch / PCS 1900 - GPRS 4slots

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 004401115115202

Frequency: 1850.2 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 52.275$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.48, 4.48, 4.48); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear/Area Scan (11x16x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.618 W/kg

Body/Rear/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.775 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.291 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.782 W/kg

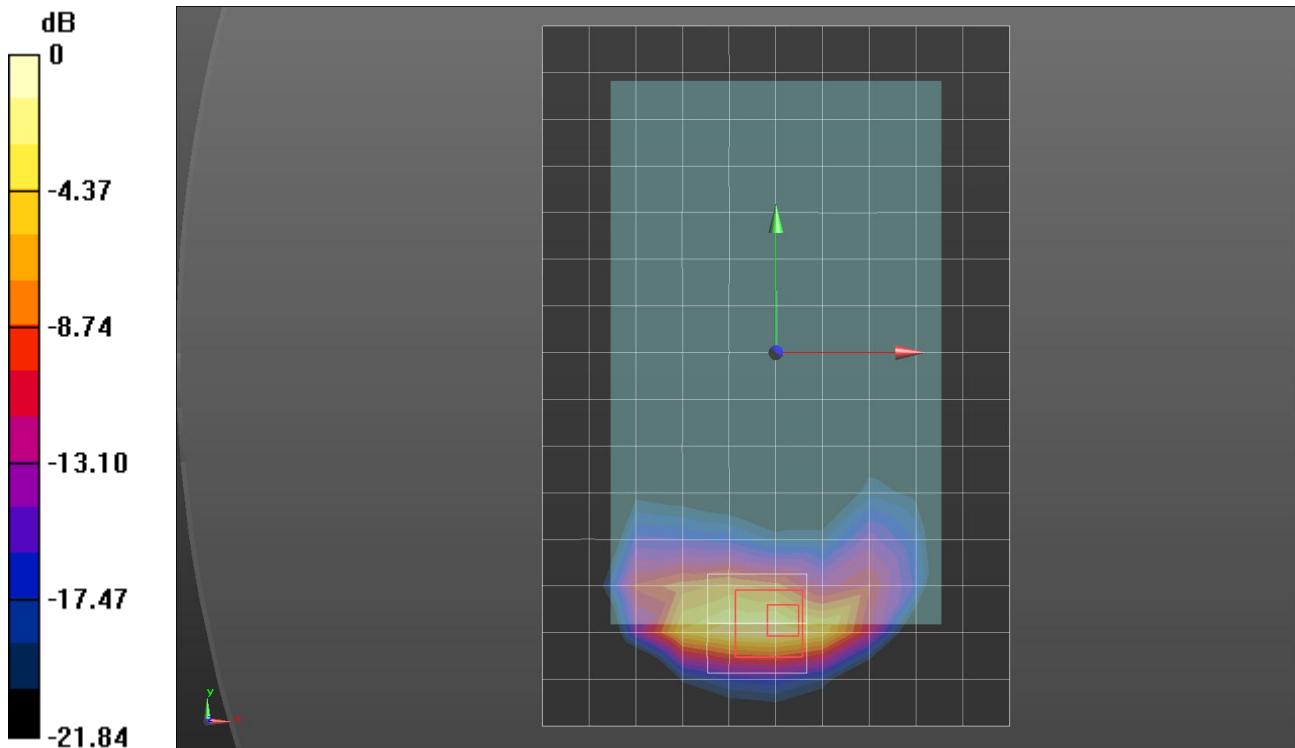

0 dB = 0.782 W/kg = -1.07 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

512ch / PCS 1900 - GPRS 4slots

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 1850.2 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.513 \text{ S/m}$; $\epsilon_r = 52.294$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.48, 4.48, 4.48); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Bottom/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.05 W/kg

Body/Bottom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.039 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.958 W/kg; SAR(10 g) = 0.440 W/kg

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 W/kg

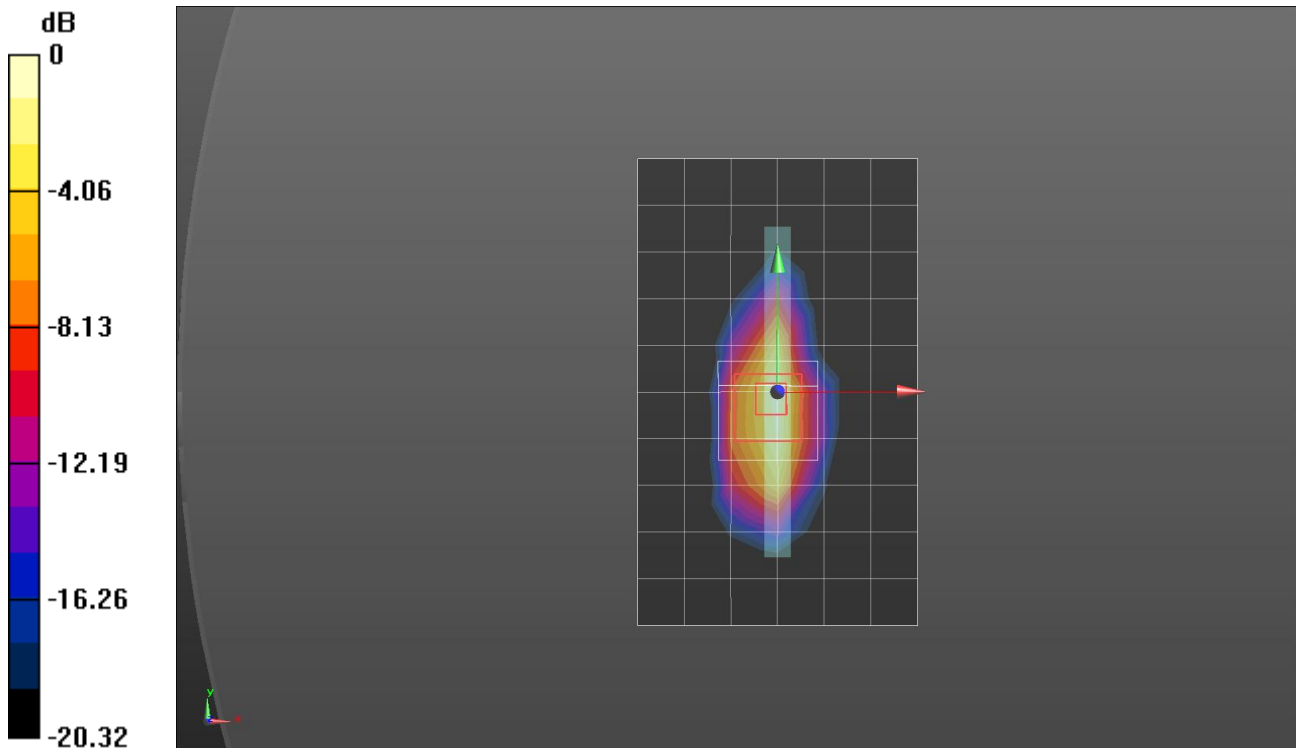

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

4182ch / WCDMA Band V

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 836.4 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.425$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.38, 6.38, 6.38); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Head/Left Touched/Area Scan (11x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0514 W/kg

Head/Left Touched/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.650 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0600 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.038 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0515 W/kg

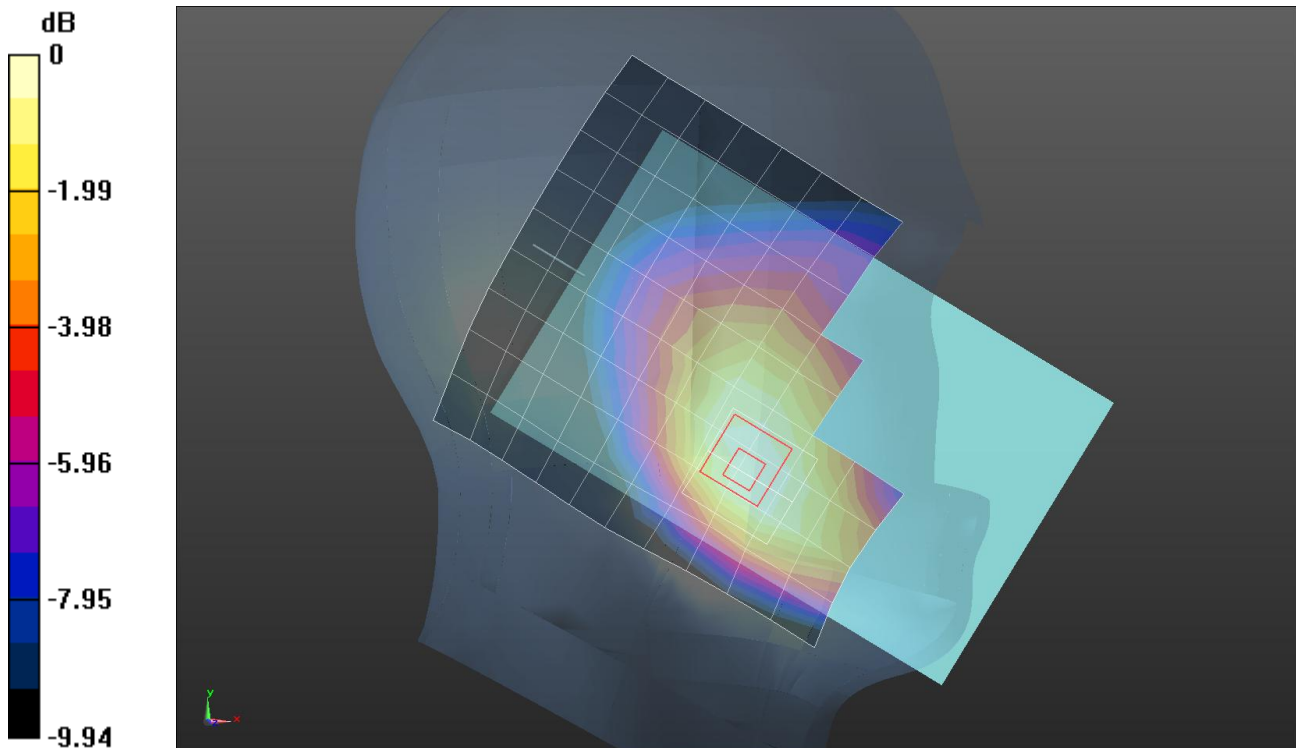

0 dB = 0.0515 W/kg = -12.88 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

4182ch / WCDMA Band V

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 836.4 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 54.883$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.04, 6.04, 6.04); Calibrated: 8/16/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear/Area Scan (11x16x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.954 W/kg

Body/Rear/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.243 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.512 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

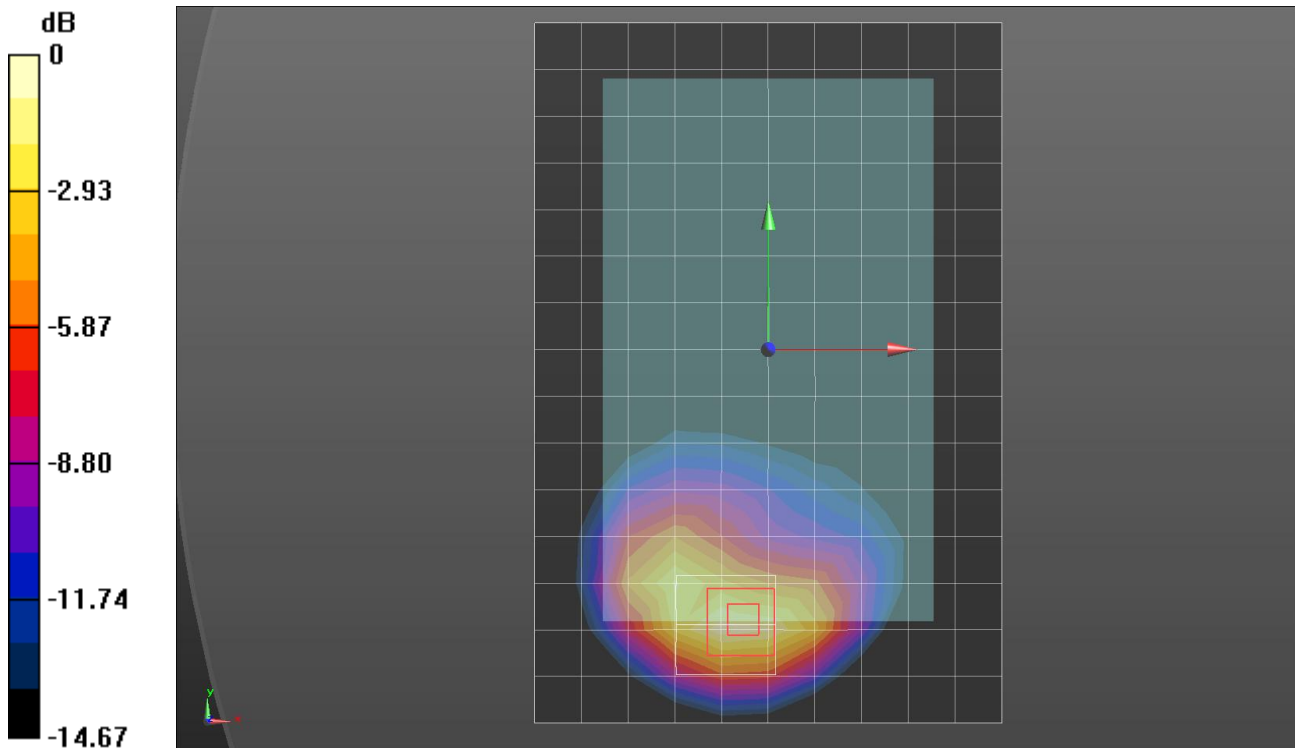

0 dB = 1.03 W/kg = 0.13 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.453$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(6.95, 6.95, 6.95); Calibrated: 9/12/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Head/Left Touched/Area Scan (13x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0506 W/kg


Head/Left Touched/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.182 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0514 W/kg

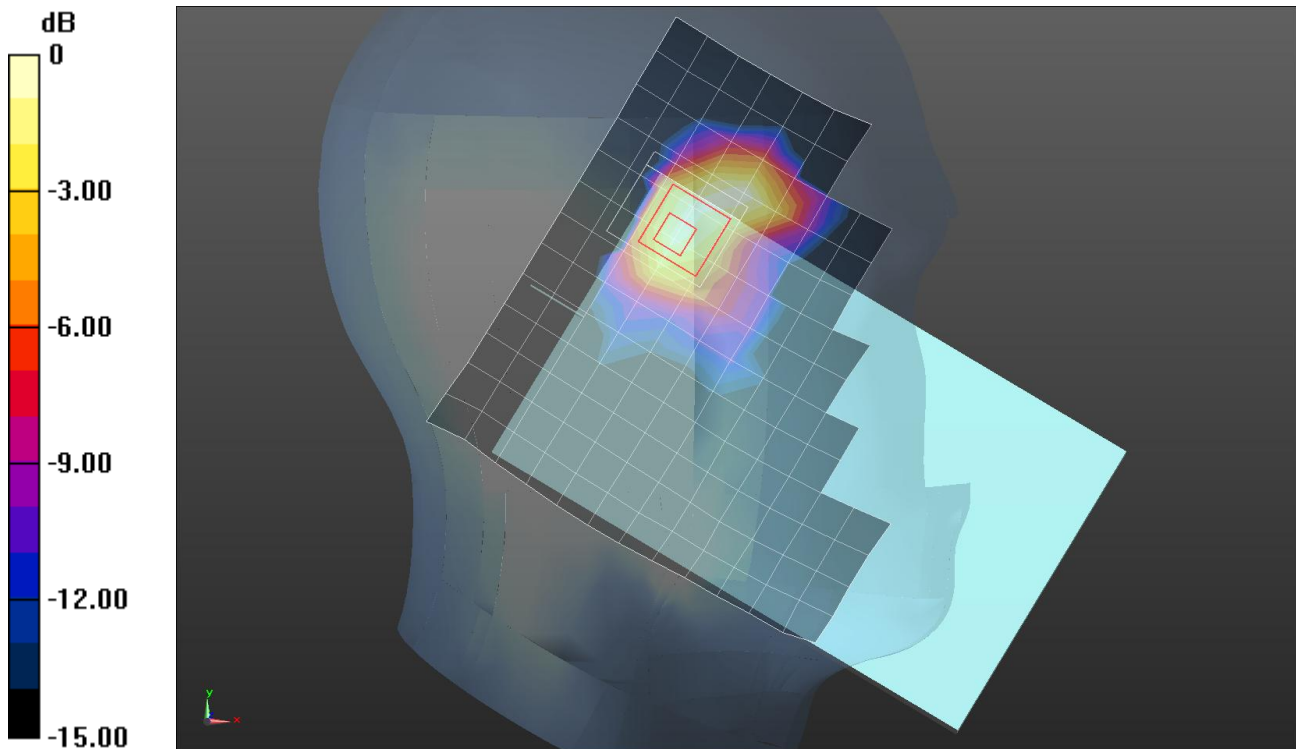

0 dB = 0.0514 W/kg = -12.89 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 004401115115202

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.478$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(7.14, 7.14, 7.14); Calibrated: 9/12/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear/Area Scan (14x21x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.48 W/kg


Body/Rear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.639 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 2.22 W/kg

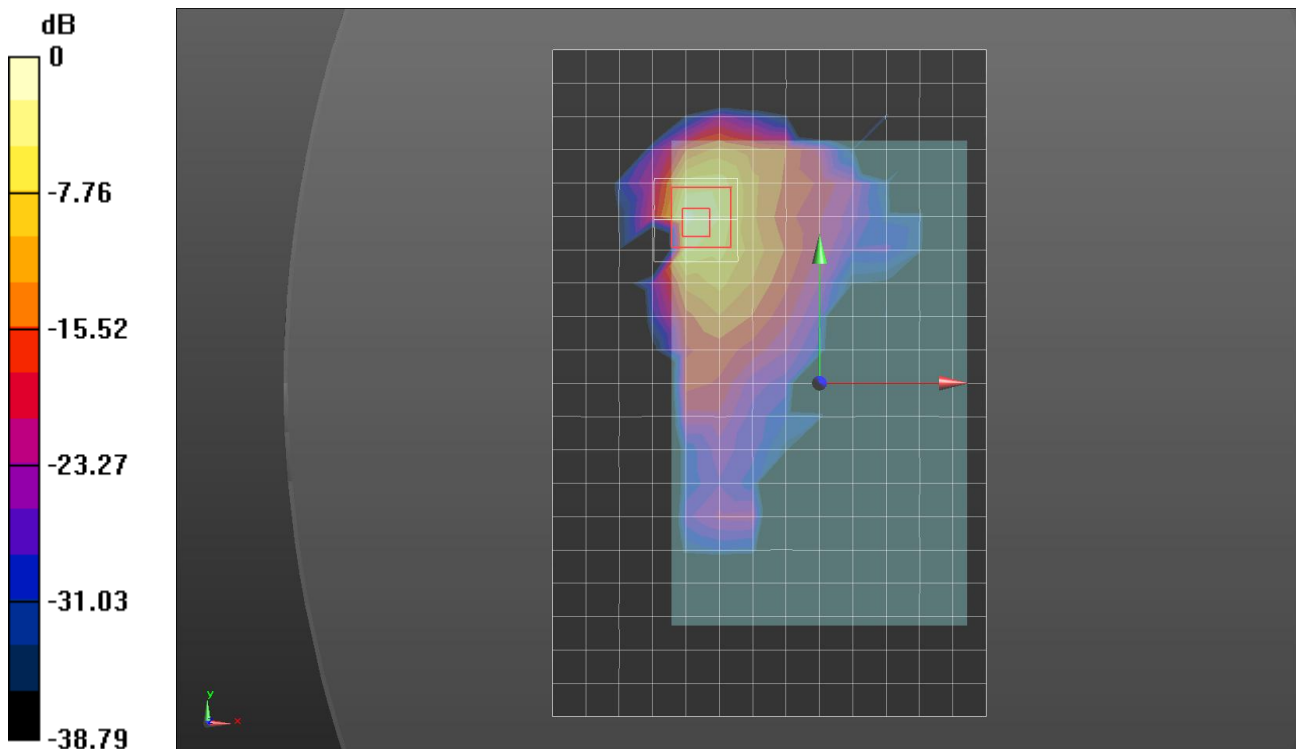

0 dB = 2.22 W/kg = 3.46 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 004401115115202

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.478$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(7.14, 7.14, 7.14); Calibrated: 9/12/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear w/headset/Area Scan (14x21x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.44 W/kg


Body/Rear w/headset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.915 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 2.25 W/kg

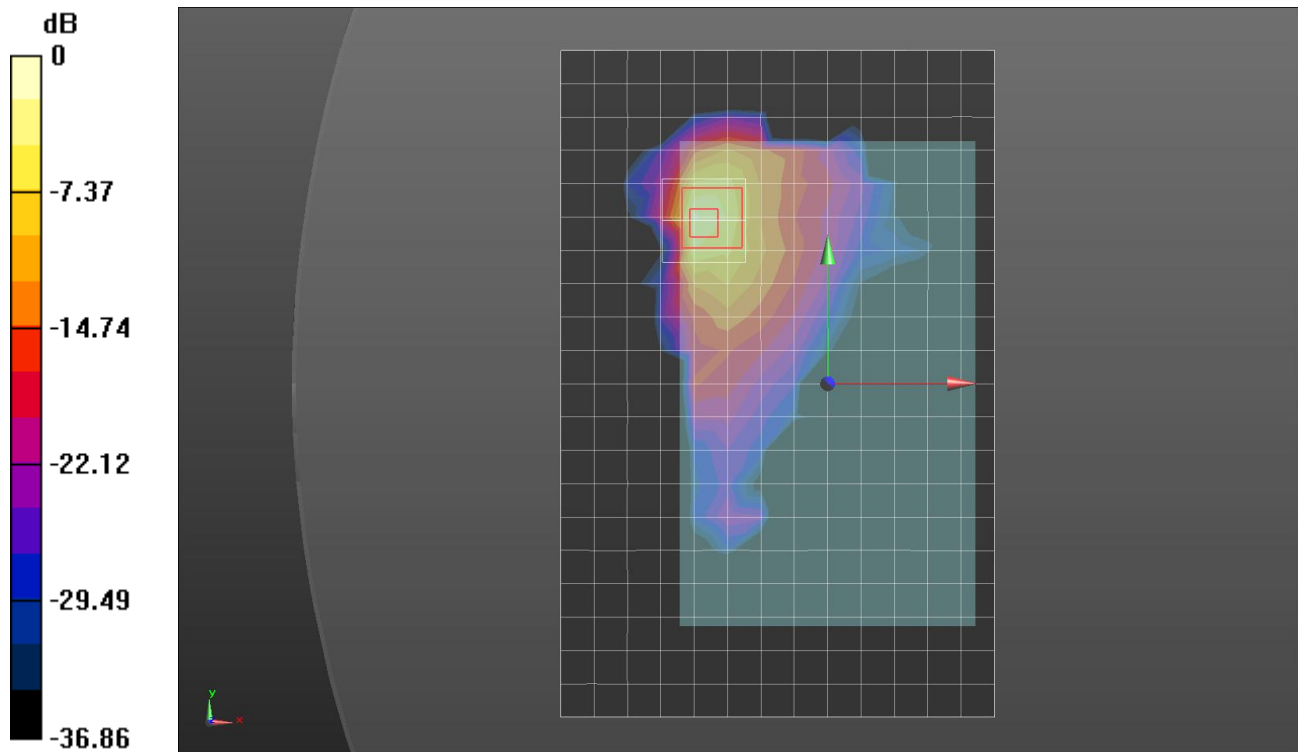

0 dB = 2.25 W/kg = 3.52 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

36ch / 802.11a 6Mbps

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 004401115115202

Frequency: 5180 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.401$ S/m; $\epsilon_r = 48.247$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.27, 4.27, 4.27); Calibrated: 9/12/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear/Area Scan (15x22x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.666 W/kg


Body/Rear/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.806 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 6.45 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 2.84 W/kg

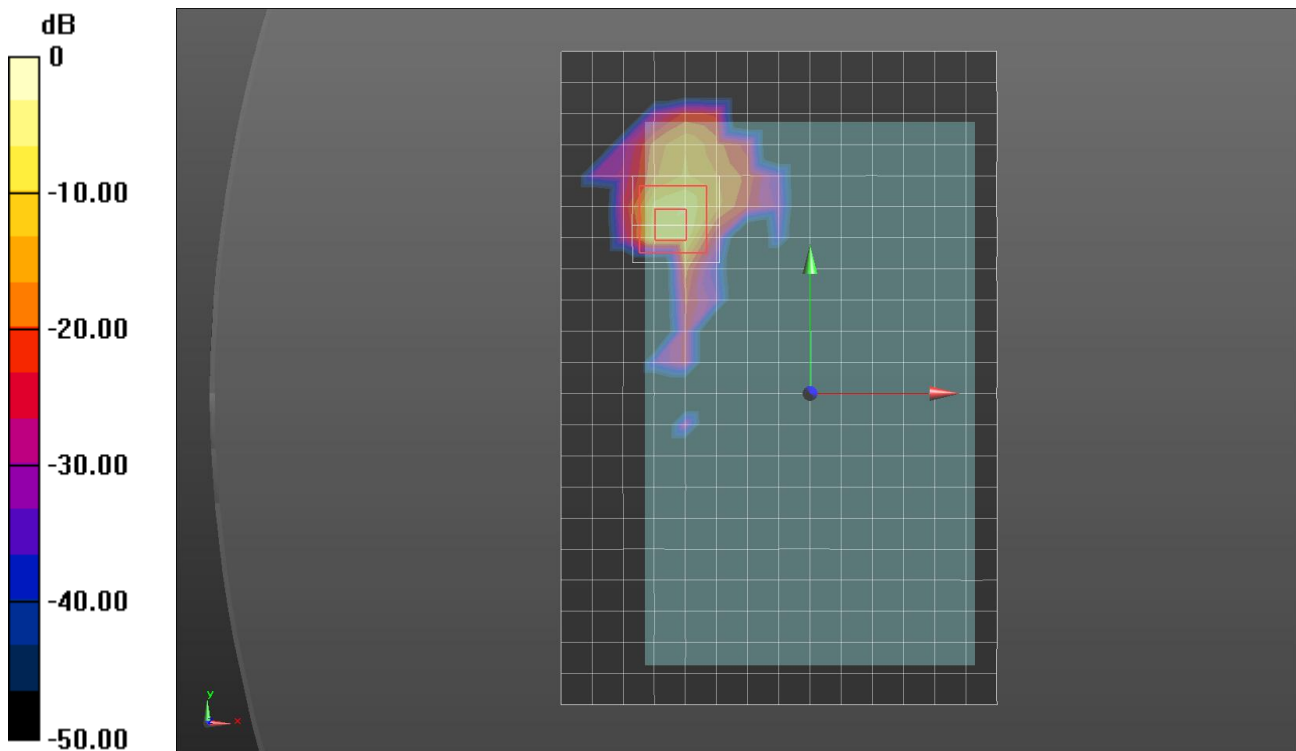

0 dB = 2.84 W/kg = 4.53 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

52ch / 802.11a 6Mbps

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 5260 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.488$ S/m; $\epsilon_r = 48.075$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.07, 4.07, 4.07); Calibrated: 9/12/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear/Area Scan (15x22x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.94 W/kg


Body/Rear/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.457 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 8.19 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 3.12 W/kg

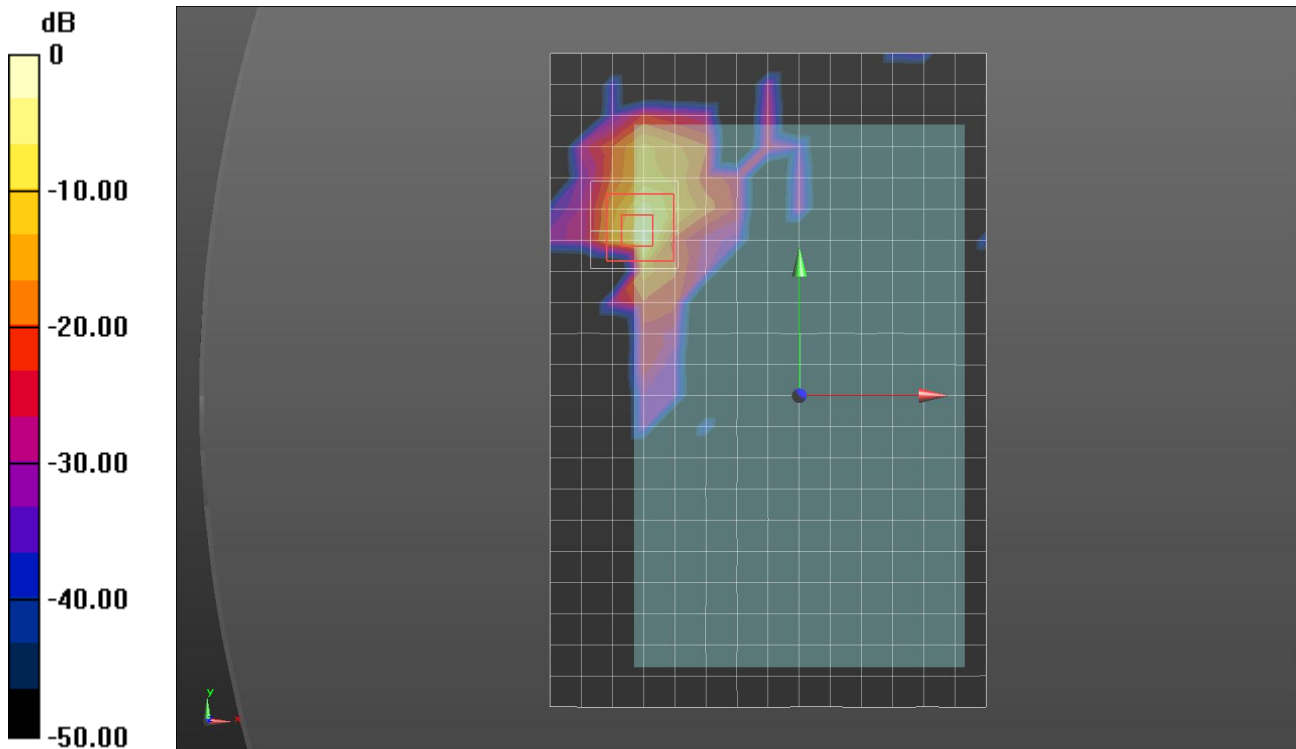

0 dB = 3.12 W/kg = 4.94 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

104ch / 802.11a 6Mbps

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 004401115115202

Frequency: 5520 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.847$ S/m; $\epsilon_r = 47.426$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.06, 4.06, 4.06); Calibrated: 9/12/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear/Area Scan (15x22x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.06 W/kg


Body/Rear/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.088 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 6.97 W/kg

SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 2.86 W/kg

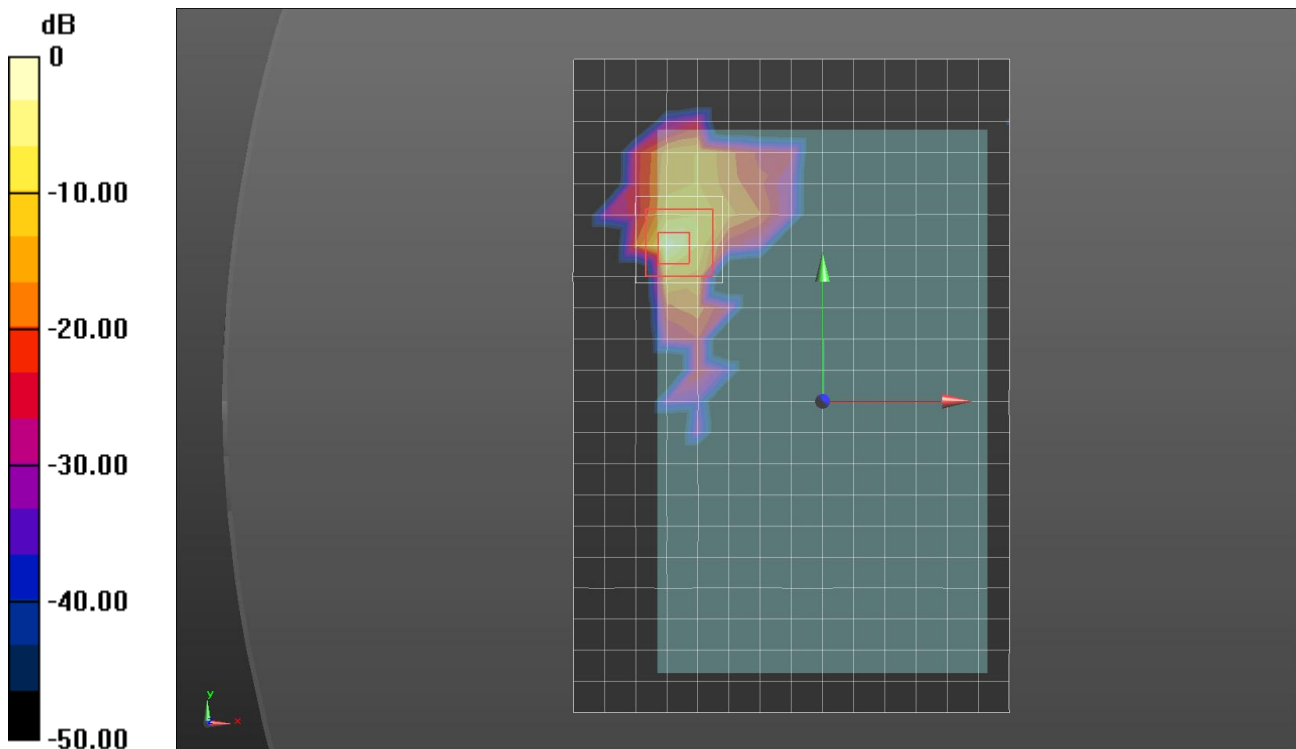

0 dB = 2.86 W/kg = 4.56 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

104ch / 802.11a 6Mbps

DUT: Hand Held Mini Phablet; Type: SH-06F; Serial: 00440115115202

Frequency: 5520 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.847$ S/m; $\epsilon_r = 47.426$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.06, 4.06, 4.06); Calibrated: 9/12/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: ELI v4.0 TP1063; Type: QDOVA001BB; Serial: TP1063
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Body/Rear w/headset/Area Scan (15x22x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.75 W/kg


Body/Rear w/headset/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.704 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 8.19 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 3.22 W/kg

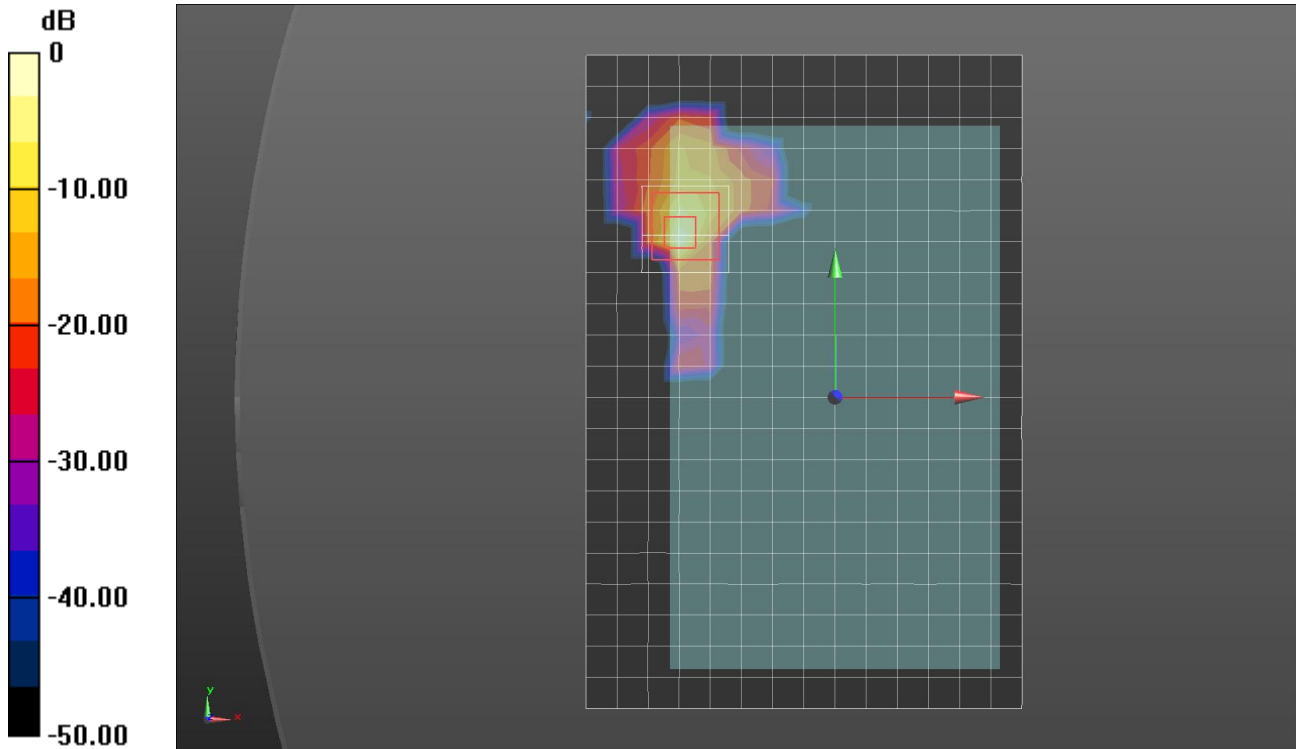

0 dB = 3.22 W/kg = 5.08 dBW/kg