

RF Exposure Report

Report No.: SA180613D06

FCC ID: ARS-WPCWATXMPA5

Model No: MX38VC

Series Model: MX38V****(The "*" can be any alphanumeric character including blank, for marketing differences)

Received Date: Jun. 13, 2018

Test Date: Jul. 13, 2018

Issued Date: Jul. 13, 2018

Applicant: TOP VICTORY ELECTRONICS (TAIWAN) CO., LTD.

Address: 10F., No 230, Liancheng Rd., Zhonghe Dist., New Taipei City 23553, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 General Information	5
2.1 General Description of EUT	5
3 RF Exposure	6
3.1 Test Setup	6
3.2 Test Instruments	6
3.3 Limits For Maximum Permissible Exposure (MPE).....	7
3.4 Test Point Description	7
4 Calculation Result Of Maximum Conducted Power	8
5 Photographs of the Test Configuration	10

Release Control Record

Issue No.	Description	Date Issued
SA180613D06	Original release.	Jul. 13, 2018

1 Certificate of Conformity

Product: LCD MONITOR (with Wireless Qi Charger 15W)

Brand: ASUS

Model No: MX38VC

Series Model: MX38V**** (The "*" can be any alphanumeric character including blank, for marketing differences)

Sample Status: Engineering sample


Applicant: TOP VICTORY ELECTRONICS (TAIWAN) CO., LTD.

Test Date: Jul. 13, 2018

Standards: FCC Part 1 (Section 1.1307(b), 1.1310)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date:

Jul. 13, 2018

Jessica Cheng / Senior Specialist

Approved by :



Date:

Jul. 13, 2018

Rex Lai / Associate Technical Manager

2 General Information

2.1 General Description of EUT

Product	LCD MONITOR (with Wireless Qi Charger 15W)
Brand	ASUS
Model No	MX38VC
Series Model	MX38V**** (The "*" can be any alphanumeric character including blank, for marketing differences)
Model Difference	For marketing purpose
Status of EUT	Engineering sample
Nominal Voltage	19.5Vdc from Adapter For Monitor 5Vdc from Monitor For Wireless Qi Charger
Modulation Type	Load Modulation
Operating Frequency	127-128kHz
Tested Frequency	127kHz, 128kHz
Antenna Type	Loop antenna
Antenna Connector	N/A
Accessory Device	Adapter
Data Cable Supplied	N/A
Maximum power output from the charging coil	Less than 15W

Note:

1. The EUT is a LCD MONITOR with Wireless Qi Charger.
2. The LCD MONITOR contains module as the following:

➤ BT V4.0 LE Dual Mode Bluetooth Stereo Audio Module			
Brand	Model No.	FCC ID	IC ID
Liteon	WB117C	PPQ-WB117C	4491A-WB117C


3. The EUT uses following adapter.

Brand	DELTA
Model	ADP-230EB T
Input Power	100-240V, 3.2A, 50-60Hz
Output Power	19.5V, 11.8A
Power Cord	Non-shielded AC 3-Pin cable (1.8m) Non-shielded DC cable with two ferrite cores (1.8m)

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 RF Exposure

3.1 Test Setup

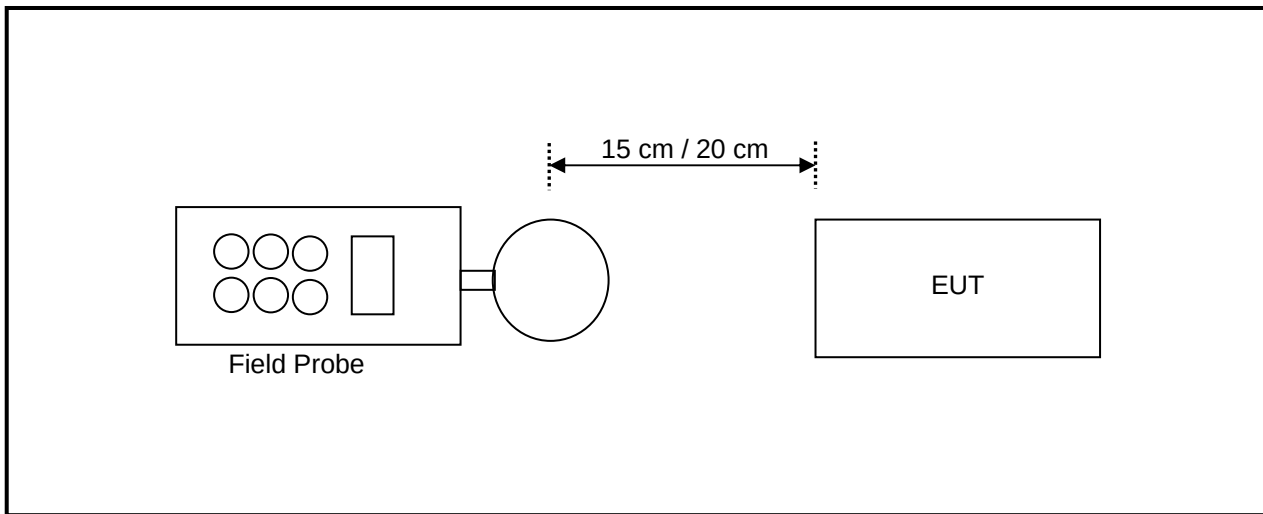

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device.

3.2 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Broadband Field Meter	NARDA	NBM-550	-	Mar. 28, 2018	Mar. 27, 2020
Magnetic Field Meter	NARDA	ELT-400	1 – 400kHz	Apr. 12, 2018	Apr. 11, 2020
Magnetic Probe	NARDA	HF-3061	300kHz – 30MHz	Apr. 16, 2018	Apr. 15, 2020
Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Apr. 17, 2018	Apr. 16, 2020
Broadband Field Meter	NARDA	NBM-550	-	Mar. 28, 2018	Mar. 27, 2020
Electric Field Meter	COMBINOVA	EFM 200	5Hz – 400kHz	Dec. 6, 2017	Dec. 5, 2019
E-Field Probe	NARDA	EF-0391	100kHz – 3GHz	Mar. 28, 2018	Mar. 27, 2020
E-Field Probe	NARDA	EF-6091	100MHz – 60GHz	Mar. 29, 2018	Mar. 28, 2020

NOTE: 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Chia Pau RF Chamber

3.3 Limits For Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density


NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

680106 D01 RF Exposure Wireless Charging App v03

The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

3.4 Test Point Description

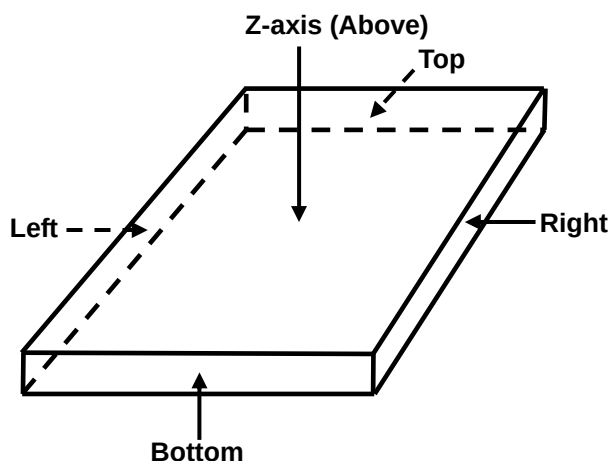

4 Calculation Result Of Maximum Conducted Power

127 kHz Charging Mode with Load Charge 10%

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.36	0.49	1.67	0.22	2.43
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.64	-613.51	-612.33	-613.78	-611.57
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.64	-306.51	-305.33	-306.78	-304.57

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.104	0.118	0.123	0.111	0.167
Max H-field (A/m)	0.0832	0.0944	0.0984	0.0888	0.1336
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5468	-1.5356	-1.5316	-1.5412	-1.4964
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7318	-0.7206	-0.7166	-0.7262	-0.6814

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

127 kHz Charging Mode with Load Charge 50%

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.42	0.54	1.74	0.27	2.61
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.58	-613.46	-612.26	-613.73	-611.39
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.58	-306.46	-305.26	-306.73	-304.39

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.112	0.129	0.119	0.121	0.141
Max H-field (A/m)	0.0896	0.1032	0.0952	0.0968	0.1128
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5404	-1.5268	-1.5348	-1.5332	-1.5172
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7254	-0.7118	-0.7198	-0.7182	-0.7022

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

127 kHz Charging Mode with Load Charge 90%

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.51	0.46	1.82	0.31	2.57
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.49	-613.54	-612.18	-613.69	-611.43
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.49	-306.54	-305.18	-306.69	-304.43

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.105	0.136	0.11	0.118	0.14
Max H-field (A/m)	0.084	0.1088	0.088	0.0944	0.112
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.546	-1.5212	-1.542	-1.5356	-1.518
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.731	-0.7062	-0.727	-0.7206	-0.703

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

128 kHz Standby Mode


E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.23	0.33	0.28	0.21	0.38
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.77	-613.67	-613.72	-613.79	-613.62
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.77	-306.67	-306.72	-306.79	-306.62

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.102	0.129	0.107	0.116	0.113
Max H-field (A/m)	0.0816	0.1032	0.0856	0.0928	0.0904
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5484	-1.5268	-1.5444	-1.5372	-1.5396
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7334	-0.7118	-0.7294	-0.7222	-0.7246

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

5 Photographs of the Test Configuration

E-Field Measurement - Charging Mode

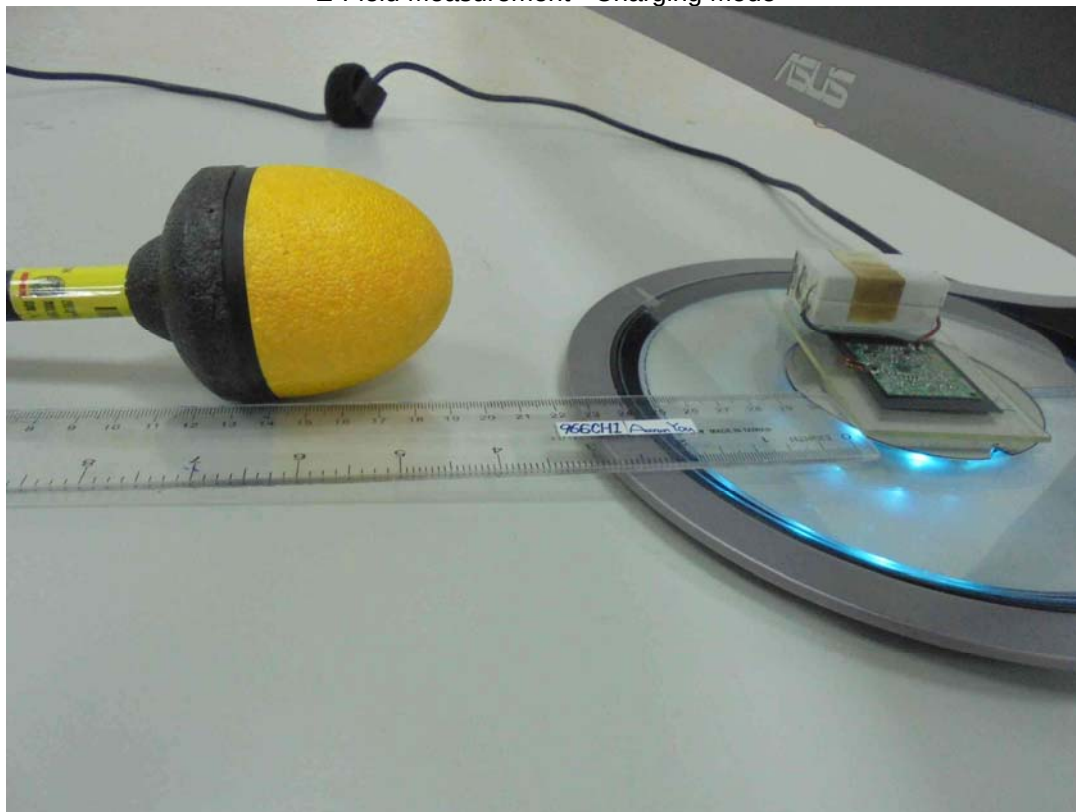

H-Field Measurement - Charging Mode



E-Field Measurement - Standby Mode



H-Field Measurement - Standby Mode



--- END ---