


5.2. Photos of Radiated Measurement at Open Field Test Site



FRONT VIEW OF RADIATED TEST

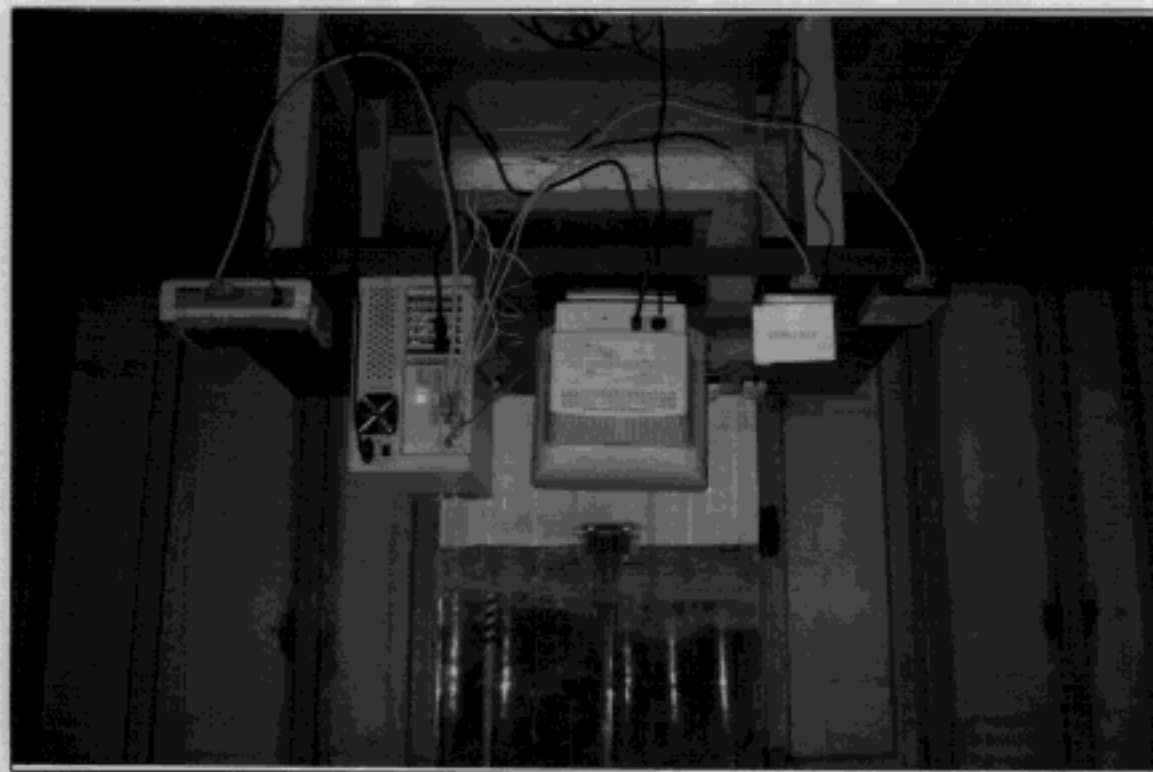

BACK VIEW OF RADIATED TEST

5. PHOTOGRAPHS

5.1. Photos of Powerline Conducted Measurement




FRONT VIEW OF CONDUCTED TEST



BACK VIEW OF CONDUCTED TEST



SETUP WITH MAXIMUM DETECTED EMISSION AT HORIZONTAL POLARIZATION

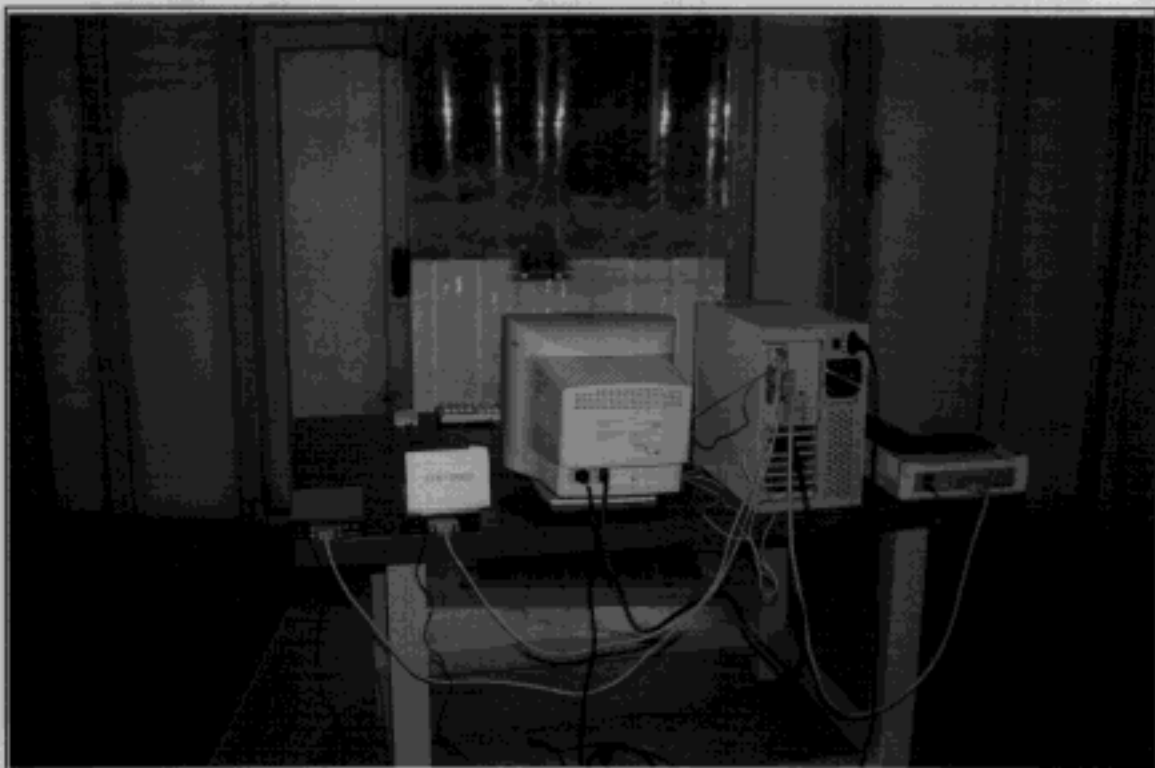

SETUP WITH MAXIMUM DETECTED EMISSION AT VERTICAL POLARIZATION

EUT and Simulators Configuration

EXHIBIT 2

Tok99-F005

EUT AND SIMULATORS CONFIGURATION

Description of EUT

Applicant : Top Victory Electronics (Taiwan) Co., Ltd.
6F, 168, Lien Chen Road, Chung-Ho, Taipei
Hsien, Taiwan, R.O.C.

Manufacturer : Top Victory Electronics (Fujian) Co.
Yuan Hong Rd., Sung-Zheng, Hong-Lu,
Fuding City, Fujian, China.

Product Name : 15" Color Monitor

Model Number : (1) 15E4220T (Non-MPR Safety Version)
(2) 15E4220W (MPR-2 Safety Version)
(3) 15E4220Z (TCO 95 Safety Version)

FCC ID : ARSCM5690

CRT #1 : Orion
(Last Granted) M/N M36KXU110XX51

CRT #2 : Chunghwa
(Add) M/N M36AES73X16

Horizontal Freq. : 30KHz to 54KHz

Vertical Freq. : 50Hz to 120Hz

Resolution (Max.) : 1024*768, Non-Interlaced

Data Cable #1 : Shielded, Undetachable, 1.2m
(Last Granted) Bonded a ferrite core

Data Cable #2 : Shielded, Undetachable, 1.5m
(Add) Bonded a ferrite core

Power Cord : Non-shielded, Detachable, 1.8m

TTEMC Report No. : TTEMC-F99054

Date of Test : Apr. 21 ~ 22, 19999

Remarks: This EUT is a modified version of original FCC ID.: ARSCM5690.

The details of difference are as follows:

- (1) to add a CRT (Chunghwa, M/N M36AES73X16) and a data cable (Shielded, 1.5m with a ferrite core).
- (2) to re-layout main board.
- (3) to change the max. resolution from 800*600 (53.67KHz/85Hz) into 1024*768 (48.3KHz/60Hz).

Description of Simulators

@ Personal Computer

Mother Board : ASUS, M/N P5A
FCC by DoC
CPU : AMD K6-2-266MHz
Case : Enlight, M/N EN7105C
F.D.D. : Mitsumi, M/N D353M3
H.D.D. : Seagate, M/N ST34321A
S.P.S. : SPI, M/N FSP250-61GT
FCC by DoC
VGA Card : Dataexpert Corp.
M/N CP765V2, S/N E700492317
FCC ID. LUT-CP765

@ Keyboard

Model Number : 5121
Serial Number : J83300811
FCC ID : E5XKBM104M10UC
Manufacturer : BTC

@ Printer

Model Number : 2225C+
Serial Number : 3121S97227
FCC ID : DSI6XU2225
Manufacturer : Hewlett Packard

@ Model #1

Model Number : DM-1414
Serial Number : 980034384
FCC ID : IFAXDM1414
Manufacturer : Aceex

@ Model #2

Model Number : DM-1414
Serial Number : 980034383
FCC ID : IFAXDM1414
Manufacturer : Aceex

@ PS2 Mouse

Model Number : M-S35
Serial Number : LZA82103197
FCC ID : DZL211029
Manufacturer : Logitech

@ USB Mouse #1

Model Number : M-UB48
Serial Number : LZB81900208
FCC ID : DZL211137
Manufacturer : Logitech

@ USB Mouse #2

Model Number : M-UB48
Serial Number : LZB81900219
FCC ID : DZL211137
Manufacturer : Logitech

EXHIBIT 3

Test Report

Test Report

TTEMC-F99054

TABLE OF CONTENTS

Description	Page
Test Report Certification.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	6
2. POWERLINE CONDUCTED TEST	7
2.1. Test Equipment	7
2.2. Block Diagram of Test Setup.....	7
2.3. Powerline Conducted Emission Limit (CLSPR 22 CLASS B)	7
2.4. EUT's Configuration during Compliance Measurement.....	8
2.5. Operating Condition of EUT.....	8
2.6. Test Procedure.....	9
2.7. Line Conducted RF Voltage Measurement Results.....	~
3. RADIATED EMISSIONS	~

Taiwan Tokin EMC Eng. Corp. Report No. TTEMCF-99054

File Number : ATM-G99005R(G984443/G98247)
 Report Number : TTEMCF-99054
 Date of Test : Apr. 21 ~ 22, 1999
 Date of Report : Apr. 23, 1999

Tel: (02) 2609-9301, 2609-2133

Prepared By : Taiwan Tokin EMC Eng. Corp.
 No. 53-11, Tin-Fu Tsun, Lin-Kou,
 Taipei Hsien, Taiwan, R.O.C.

Prepared for : Top Victory Electronics (Taiwan) Co., Ltd.
 6F, 168, Lien Chen Road, Chung-Ho,
 Taipei Hsien, Taiwan, R.O.C.

TOK99-F005

TEST REPORT CERTIFICATION

(Class II Permissive Change)

Applicant : Top Victory Electronics (Taiwan) Co., Ltd.
 Manufacturer : Top Victory Electronics (Fujian) Co., Ltd.
 FCC ID : ARSCM5690
 EUT Description : 15" Color Monitor
 (A) MODEL NO. : (1)15E4220T (2)15E4220W (3)15E4220Z
 (B) SERIAL NO. : N/A
 (C) BRAND : PHILIPS
 (D) POWER SUPPLY : 120V AC/60Hz

Measurement Procedure Used :

FCC RULES AND CISPR 22 (DOCKET NO. 92-152, SEP. 1993) AND
 FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the CISPR 22 Class B limits both radiated and conducted emissions.

The measurement results are contained in this test report and TAIWAN TOKIN EMC ENG. CORP. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Apr. 21 ~ 22, 1999

Prepared by : Julie Hsu Apr. 28, '99
 (JULIE HSU)

Test Engineer : Allen Wang 4/28, '99
 (ALLEN WANG)

Approve & Authorized Signer : Jackie Deng 4/28, '99
 (JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	15" Color Monitor
Model Number	:	(1)15E4220T (Non-MPR Safety Version) (2)15E4220W (MPR-2 Safety Version) (3)15E4220Z (TCO95 Safety Version)
FCC ID	:	ARSCM5690
Brand	:	PHILIPS
Applicant	:	Top Victory Electronics (Taiwan) Co., Ltd. 6F, 168, Lien Chen Road, Chung-Ho, Taipei Hsien, Taiwan, R.O.C.
Manufacturer	:	Top Victory Electronics (Fujian) Co., Ltd. Yuan Hong Rd., Sung-Zheng, Hong-Lu, Fuding City, Fujian, China.
CRT #1	:	Orion, M/N M36KXU110XX51
CRT #2	:	Chunghwa, M/N M36AES73X16 S/N 8AW-TPV-15AS39
Data Cable #1	:	Shielded, Undetachable, 1.2m Bonded a ferrite core
Data Cable #2	:	Shielded, Undetachable, 1.5m Bonded a ferrite core
Power Cord	:	Non-Shielded, Detachable, 1.8m
Data of Receipt of Sample	:	Apr. 13, 1999
Date of Test	:	Apr. 21 ~ 22, 1999

Remark :

This EUT is a modified version of original FCC ID ARSCM5690.

The details of difference list as follows:

1. to add a CRT (Chunghwa, M/N M36AES73X16) and a data cable (Shielded, Undetachable, 1.5m with a ferrite core).
2. to re-layout main board.
3. to change the max. resolution from 800*600 (53.67KHz/85Hz) into 1024*768 (48.3KHz/60Hz).

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Mother Board	:	ASUS, M/N P5A FCC ID. By DoC
CPU	:	AMD K6-2 266MHz
Case	:	Enlight, M/N EN7105C
S.P.S.	:	SPI, M/N FSP250-61GT S/N W13562650
Floppy Driver 3.5"	:	Mitsumi, M/N D353M3
Hard Disk Driver	:	Seagate, M/N ST34321A S/N VTH90436
VGA Card	:	Dataexpert, M/N CP765V2 S/N E700492317 FCC ID LUT-CP765
Power Cord	:	Nonshielded, Detachable, 1.8m

1.2.2. KEYBOARD

Model Number	:	5121
Serial Number	:	J83300811
FCC ID	:	E5XKBM104M10UC
Manufacturer	:	BTC
Data Cable	:	Shielded, Undetachable, 1m

1.2.3. PRINTER

Model Number	:	2225C+
Serial Number	:	3123S97227
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	KANI, Model AD-09
Power Cord	:	Non-Shielded, Detachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.4. MOUSE

Model Number	:	M-S35
Serial Number	:	LZA82103197
FCC ID	:	DZL211029
Manufacturer	:	Logitech
Data Cable	:	Non-Shielded, Undetachable, 1.8m

1.2.5. MODEM #1

Model Number	:	DM-1414
Serial Number	:	980034384
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, M/N AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.6. MODEM #2

Model Number	:	DM-1414
Serial Number	:	980034383
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, M/N AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.7. USB MOUSE #1

Model Number	:	M-UB48
Serial Number	:	LZB81900208
FCC ID	:	DZL211137
Manufacturer	:	Logitech
Data Cable	:	Shielded, Undetachable, 1.8m

1.2.8. USB MOUSE #2

Model Number	:	M-UB48
Serial Number	:	LZB81900219
FCC ID	:	DZL211137
Manufacturer	:	Logitech
Data Cable	:	Shielded, Undetachable, 1.8m

1.3. Description of Test Facility

Site Description (No. 5 Open Site)	:	Feb. 13, 1998 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C
NVLAP Lab Code	:	200077-0


2. POWERLINE CONDUCTED TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS 10	844591/015	Jan.30, 99'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-1370-9	Jun.03, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-1370-10	Jun.03, 98'	1 Year

2.2. Block Diagram of Test Setup

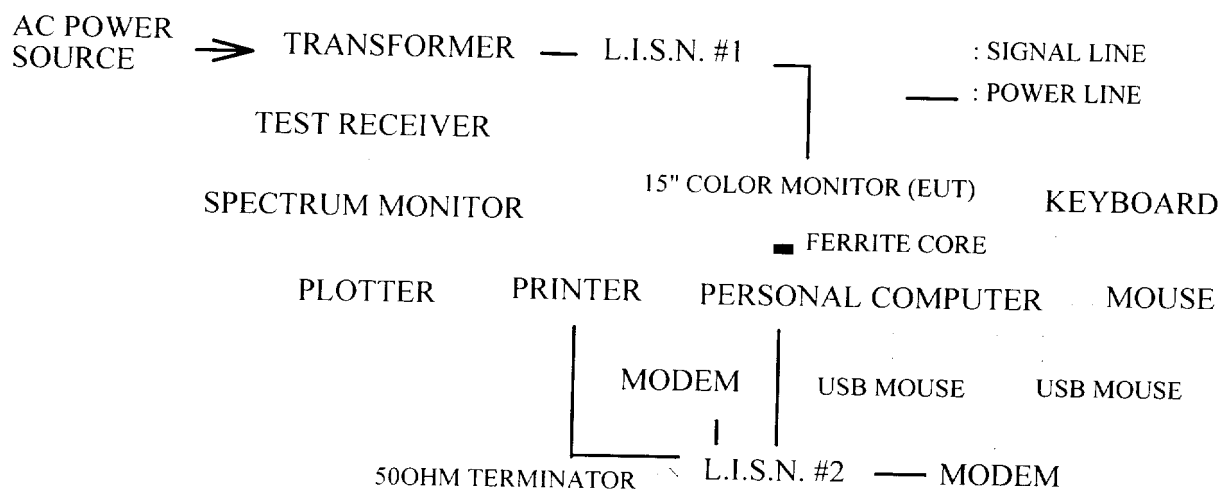

2.3. Powerline Conducted Emission Limit (CLSPR 22 CLASS B)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150KHz ~ 500KHz	66 ~ 56 dB	56 ~ 46 dB
500KHz ~ 5MHz	56 dB	46 dB
5MHz ~ 30MHz	60 dB	50 dB

REMARKS : RF LINE VOLTAGE (dBuV) = 20 log RF LINE VOLTAGE (uV)

2.4. EUT's Configuration during Compliance Measurement

The following equipments were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

2.4.1. 15" Color Monitor (EUT)

Model Number	:	15E4220T
FCC ID	:	ARSCM5690
Brand	:	PHILIPS
Manufacturer	:	Top Victory Electronics (Fujian) Co., Ltd.
CRT	:	Chunghwa M/N M36AES73X16 S/N 8AW-TPV-15AS39
Data Cable	:	Shielded, Undetachable, 1.5m Bonded a ferrite core
Power Cord	:	Non-Shielded, Detachable, 1.8m

2.4.2. Supporting System : As in section 1.2

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown on 2.2.
- 2.5.2. Turned on the power of all equipments.
- 2.5.3. Personal Computer read data from disk.
- 2.5.4. Personal Computer running the self-test program "Win-Test" by windows and sent "H" character to monitor (EUT) through VGA card and the screen displayed and filled with "H" pattern by EUT's resolution 1024*768.
- 2.5.5. Personal Computer read data from floppy disk 、 Modem and then wrote the data into floppy disk 、 Modem.
- 2.5.6. The other peripheral devices were driven and operated in turn during all testing.

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N. #1) and the other peripheral devices power cord were connected to the power mains through a line impedance stabilization network (L.I.S.N. #2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to FCC ANSI C63.4-1992 on conducted measurement.

The bandwidth of the R&S Test Receiver ESHS 10 was set at 10KHz.

The frequency range from 450KHz to 30MHz was checked.

All the test results are listed in section 2.7.

2.7. Line Conducted RF Voltage Measurement Results

PASSED. All the test results are listed in the following pages.

Test Date : Apr. 21, 1999 Temperature : 21 °C Humidity : 80 %

Test Mode : 48.3KHz / 1024*768, 60Hz

Reference Data # : # 410 (411, 412), # 407 (408, 409)

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Page 10 of 21

Data#: 410 File#: TOP-VICT.EMI

Date: 1999-04-21 Time: 19:09:45

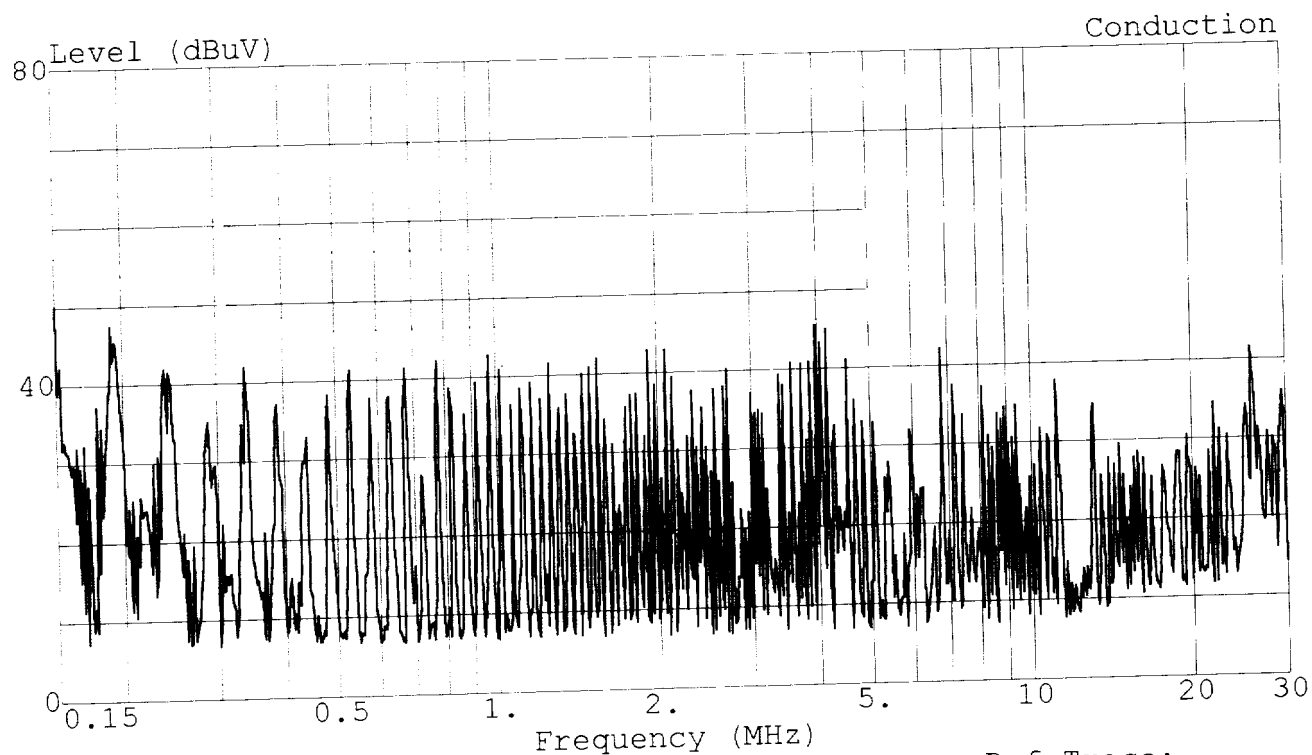

Ref Trace:

Trace:

Limit: CISPR CLASS-B Probe: KNW-244C NEUTRAL

EUT : MONITOR. M/N:15E4220T/15E4220W/15E4220Z

Power: 120Vac/60Hz

Memo : 48.3KHz(1024*768);60Hz



TAIWAN TOKIN EMC ENG. CORP.

Test Site: Page 11 of 21
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 411 File#: TOP-VICT.EMI Date: 1999-04-21 Time: 19:19:52
Conduction
Limit: CISPR CLASS-B Probe: KNW-244C NEUTRAL
EUT : MONITOR. M/N:15E4220T/15E4220W/15E4220Z
Power: 120Vac/60Hz
Memo : 48.3KHz(1024*768);60Hz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.193	47.07	-16.83	63.91	46.94	0.10	0.03	0.00	QP
2	0.484	38.31	-17.96	56.27	38.17	0.10	0.04	0.00	QP
3	2.080	41.80	-14.20	56.00	41.65	0.10	0.05	0.00	QP
4	4.399	43.50	-12.50	56.00	43.34	0.11	0.05	0.00	QP
5	13.008	36.57	-23.43	60.00	36.09	0.40	0.08	0.00	QP
6	26.000	38.36	-21.64	60.00	37.88	0.28	0.20	0.00	QP


Data#: 412 File#: TOP-VICT.EMI Date: 1999-04-21 Time: 19:20:53
Conduction
Limit: CISPR-B (AV) Probe: KNW-244C NEUTRAL
EUT : MONITOR. M/N:15E4220T/15E4220W/15E4220Z
Power: 120Vac/60Hz
Memo : 48.3KHz(1024*768);60Hz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.193	42.91	-10.99	53.91	42.78	0.10	0.03	0.00	Average
2	0.484	34.28	-11.99	46.27	34.14	0.10	0.04	0.00	Average
3 !	2.080	36.08	-9.92	46.00	35.93	0.10	0.05	0.00	Average
4 !	4.399	36.73	-9.27	46.00	36.57	0.11	0.05	0.00	Average
5	13.008	36.81	-13.19	50.00	36.33	0.40	0.08	0.00	Average
6	26.000	35.32	-14.68	50.00	34.84	0.28	0.20	0.00	Average

Data#: 407 File#: TOP-VICT.EMI

Date: 1999-04-21 Time: 19:03:31

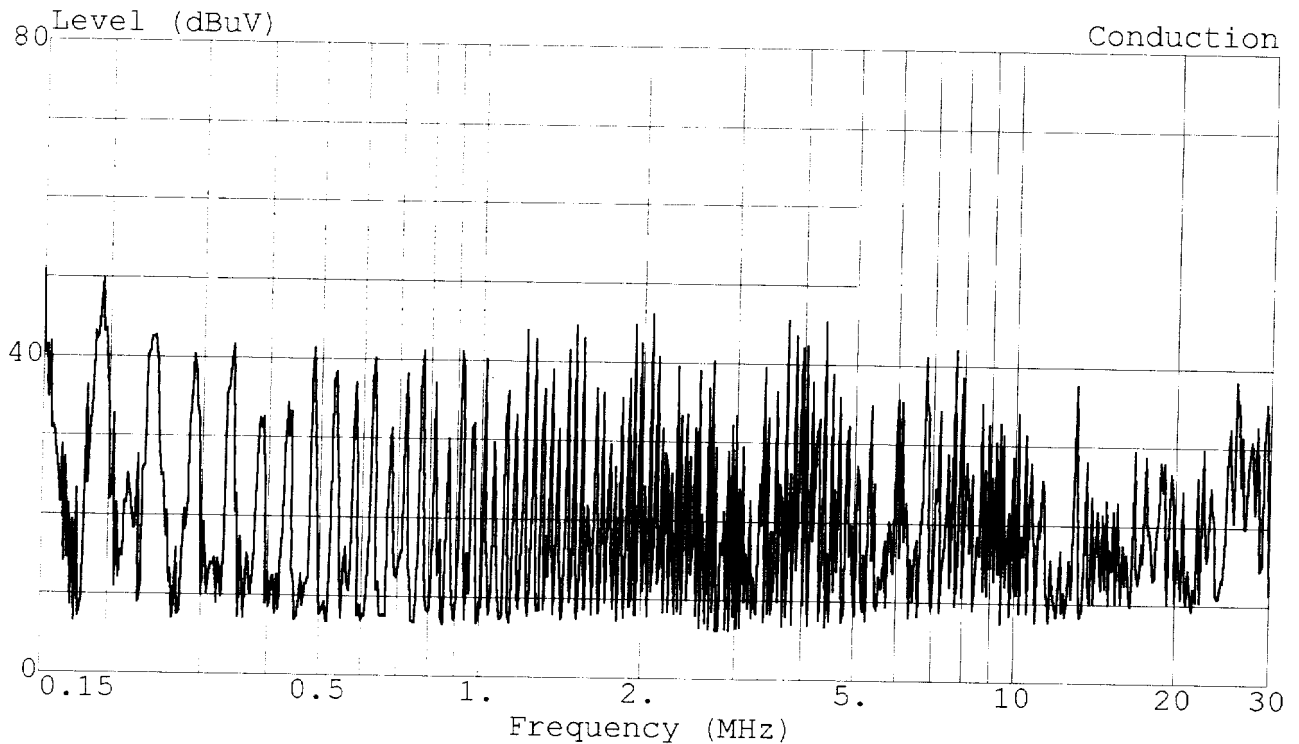

Trace:

Limit: CISPR CLASS-B Probe: KNW-244C LINE
EUT : MONITOR. M/N:15E4220T/15E4220W/15E4220Z
Power: 120Vac/60Hz
Memo : 48.3KHz(1024*768);60Hz

Ref Trace:

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 408 File#: TOP-VICT.EMI Date: 1999-04-21 Time: 19:07:41
Conduction
Limit: CISPR CLASS-B Probe: KNW-244C LINE
EUT : MONITOR. M/N:15E4220T/15E4220W/15E4220Z
Power: 120Vac/60Hz
Memo : 48.3KHz(1024*768);60Hz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.193	48.30	-15.60	63.91	48.17	0.10	0.03	0.00	QP
2	0.484	40.32	-15.95	56.27	40.18	0.10	0.04	0.00	QP
3	2.080	43.49	-12.51	56.00	43.34	0.10	0.05	0.00	QP
4	4.399	44.95	-11.05	56.00	44.79	0.11	0.05	0.00	QP
5	13.008	38.96	-21.04	60.00	38.48	0.40	0.08	0.00	QP
6	26.000	38.22	-21.78	60.00	37.74	0.28	0.20	0.00	QP

Data#: 409 File#: TOP-VICT.EMI Date: 1999-04-21 Time: 19:08:14
Conduction
Limit: CISPR-B (AV) Probe: KNW-244C LINE
EUT : MONITOR. M/N:15E4220T/15E4220W/15E4220Z
Power: 120Vac/60Hz
Memo : 48.3KHz(1024*768);60Hz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1 !	0.193	44.80	-9.10	53.91	44.67	0.10	0.03	0.00	Average
2 !	0.484	36.79	-9.48	46.27	36.65	0.10	0.04	0.00	Average
3 !	2.080	36.44	-9.56	46.00	36.29	0.10	0.05	0.00	Average
4 !	4.399	37.83	-8.17	46.00	37.67	0.11	0.05	0.00	Average
5	13.008	34.75	-15.25	50.00	34.27	0.40	0.08	0.00	Average
6	26.000	27.97	-22.03	50.00	27.49	0.28	0.20	0.00	Average

3. RADIATED EMISSION TEST


3.1. Test Equipment

The following test equipments were used during the radiated emission tests :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESVP	861190/011	Dec.21, 98'	1 Year
2.	Amplifier	HP	8447D	2944A07185	Jul.23, 98'	1 Year
3.	Broadband Antenna	Chase	VBA6106A	1245	Jul.23, 98'	1 Year
4.	Log Periodic Antenna	Chase	UPA6109	1035	Jul.23, 98'	1 Year

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

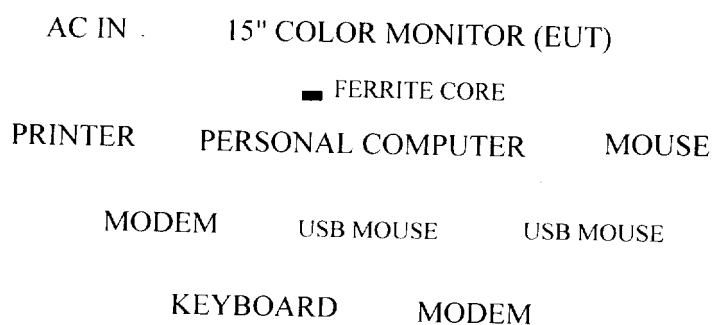

3.2.2. Open Field Test Site Setup Diagram

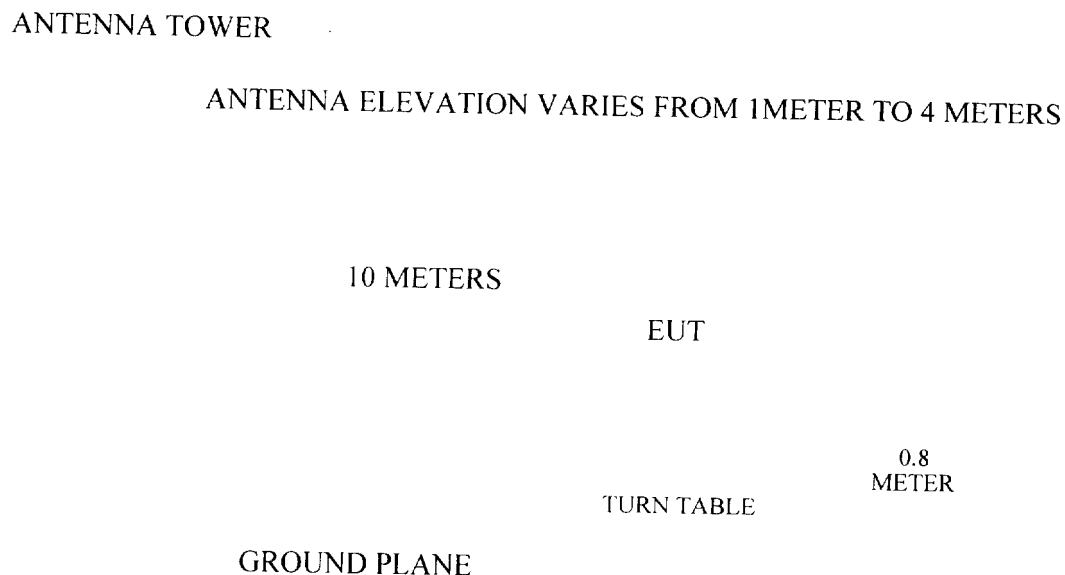

3.3. Radiation Limit (CLSPR 22 CLASS B)

All emanations from a class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dBuV/m)
30 ~ 230	10	30
230 ~ 1000	10	37

- Note :
- (1) The tighter limit shall apply at the edge between two frequency bands.
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the E.U.T..

3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which is 0.8 meter above ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT is set 10 meters away from the receiving antenna which was mounted on a antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The bandwidth of the R&S Test Receiver ESVP was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

One test mode (48.3KHz/1024*768, 60Hz) was done during radiated measured and all the test results were listed in section 3.8.

3.7. Test Results

PASSED. All the test results are listed in the following pages.

3.8. Radiated Emission Measurement Results

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All the emissions not reported below are too low against the FCC CLASS B limit..

Date of Test : Apr. 22, 1999 Temperature : 23.5 °C
 EUT : 15" Color Monitor Humidity : 44 %
 Test Mode : 48.3KHz / 1024*768, 60Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level	
			Horizontal dBuV	Horizontal dBuV/m	Limits dBuV/m	Margin dBuV/m
55.865	12.83	1.67	2.80	17.30	30.00	12.70
65.174	12.03	1.77	4.25	18.05	30.00	11.95
83.791	14.40	2.04	7.19	23.63	30.00	6.37
111.715	18.61	2.36	4.08	25.05	30.00	4.95
130.333	19.80	2.56	2.11	24.47	30.00	5.53
148.950	20.11	2.74	2.22	25.07	30.00	4.93
158.255	20.29	2.85	1.64	24.78	30.00	5.22
195.490	20.81	3.20	- 1.66	22.35	30.00	7.65
* 214.107	21.32	3.38	0.88	25.58	30.00	4.42
242.033	22.29	3.59	5.68	31.56	37.00	5.44
279.268	23.25	3.85	3.95	31.05	37.00	5.95
307.202	13.66	4.09	10.78	28.53	37.00	8.47
325.819	14.42	4.24	7.75	26.41	37.00	10.59
372.363	15.28	4.60	7.98	27.86	37.00	9.14
428.215	16.65	4.93	4.10	25.68	37.00	11.32
502.684	18.13	5.38	7.26	30.77	37.00	6.23
558.537	19.99	5.78	0.38	26.15	37.00	10.85
605.080	19.98	6.11	0.37	26.46	37.00	10.54

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 214.107MHz with corrected signal level of 25.58dBuV/m (limit is 30dBuV/m) when the antenna was at horizontal polarization and was at 4m high and the turn table was at 230 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Date of Test : Apr. 22, 1999 Temperature : 23.5 °C
 EUT : 15" Color Monitor Humidity : 44 %
 Test Mode : 48.3KHz / 1024*768, 60Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBuV	Emission Level Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
46.554	16.75	1.49	0.50	18.74	30.00	11.26
55.862	13.94	1.67	6.74	22.35	30.00	7.65
83.788	14.11	2.04	7.74	23.89	30.00	6.11
111.715	18.79	2.36	3.82	24.97	30.00	5.03
130.328	19.15	2.56	4.08	25.79	30.00	4.21
* 148.946	20.69	2.74	3.24	26.67	30.00	3.33
158.254	21.38	2.85	1.95	26.18	30.00	3.82
176.872	20.18	3.00	2.26	25.44	30.00	4.56
214.101	22.67	3.38	0.15	26.20	30.00	3.80
242.033	21.72	3.59	1.90	27.21	37.00	9.79
279.267	21.85	3.85	2.20	27.90	37.00	9.10
307.192	14.69	4.09	9.72	28.50	37.00	8.50
325.809	13.81	4.24	12.27	30.32	37.00	6.68
344.427	15.65	4.38	9.99	30.02	37.00	6.98
390.975	15.59	4.68	6.07	26.34	37.00	10.66
456.135	17.12	5.14	3.83	26.09	37.00	10.91
521.296	18.00	5.55	2.60	26.15	37.00	10.85
558.531	19.44	5.78	5.38	30.60	37.00	6.40
605.075	19.79	6.11	2.39	28.29	37.00	8.71

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 148.946MHz with corrected signal level of 26.67dBuV/m (limit is 30dBuV/m) when the antenna was at vertical polarization and was at 1.3m high and the turn table was at 350 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

4. DEVIATION TO TEST SPECIFICATIONS

【 NONE 】