



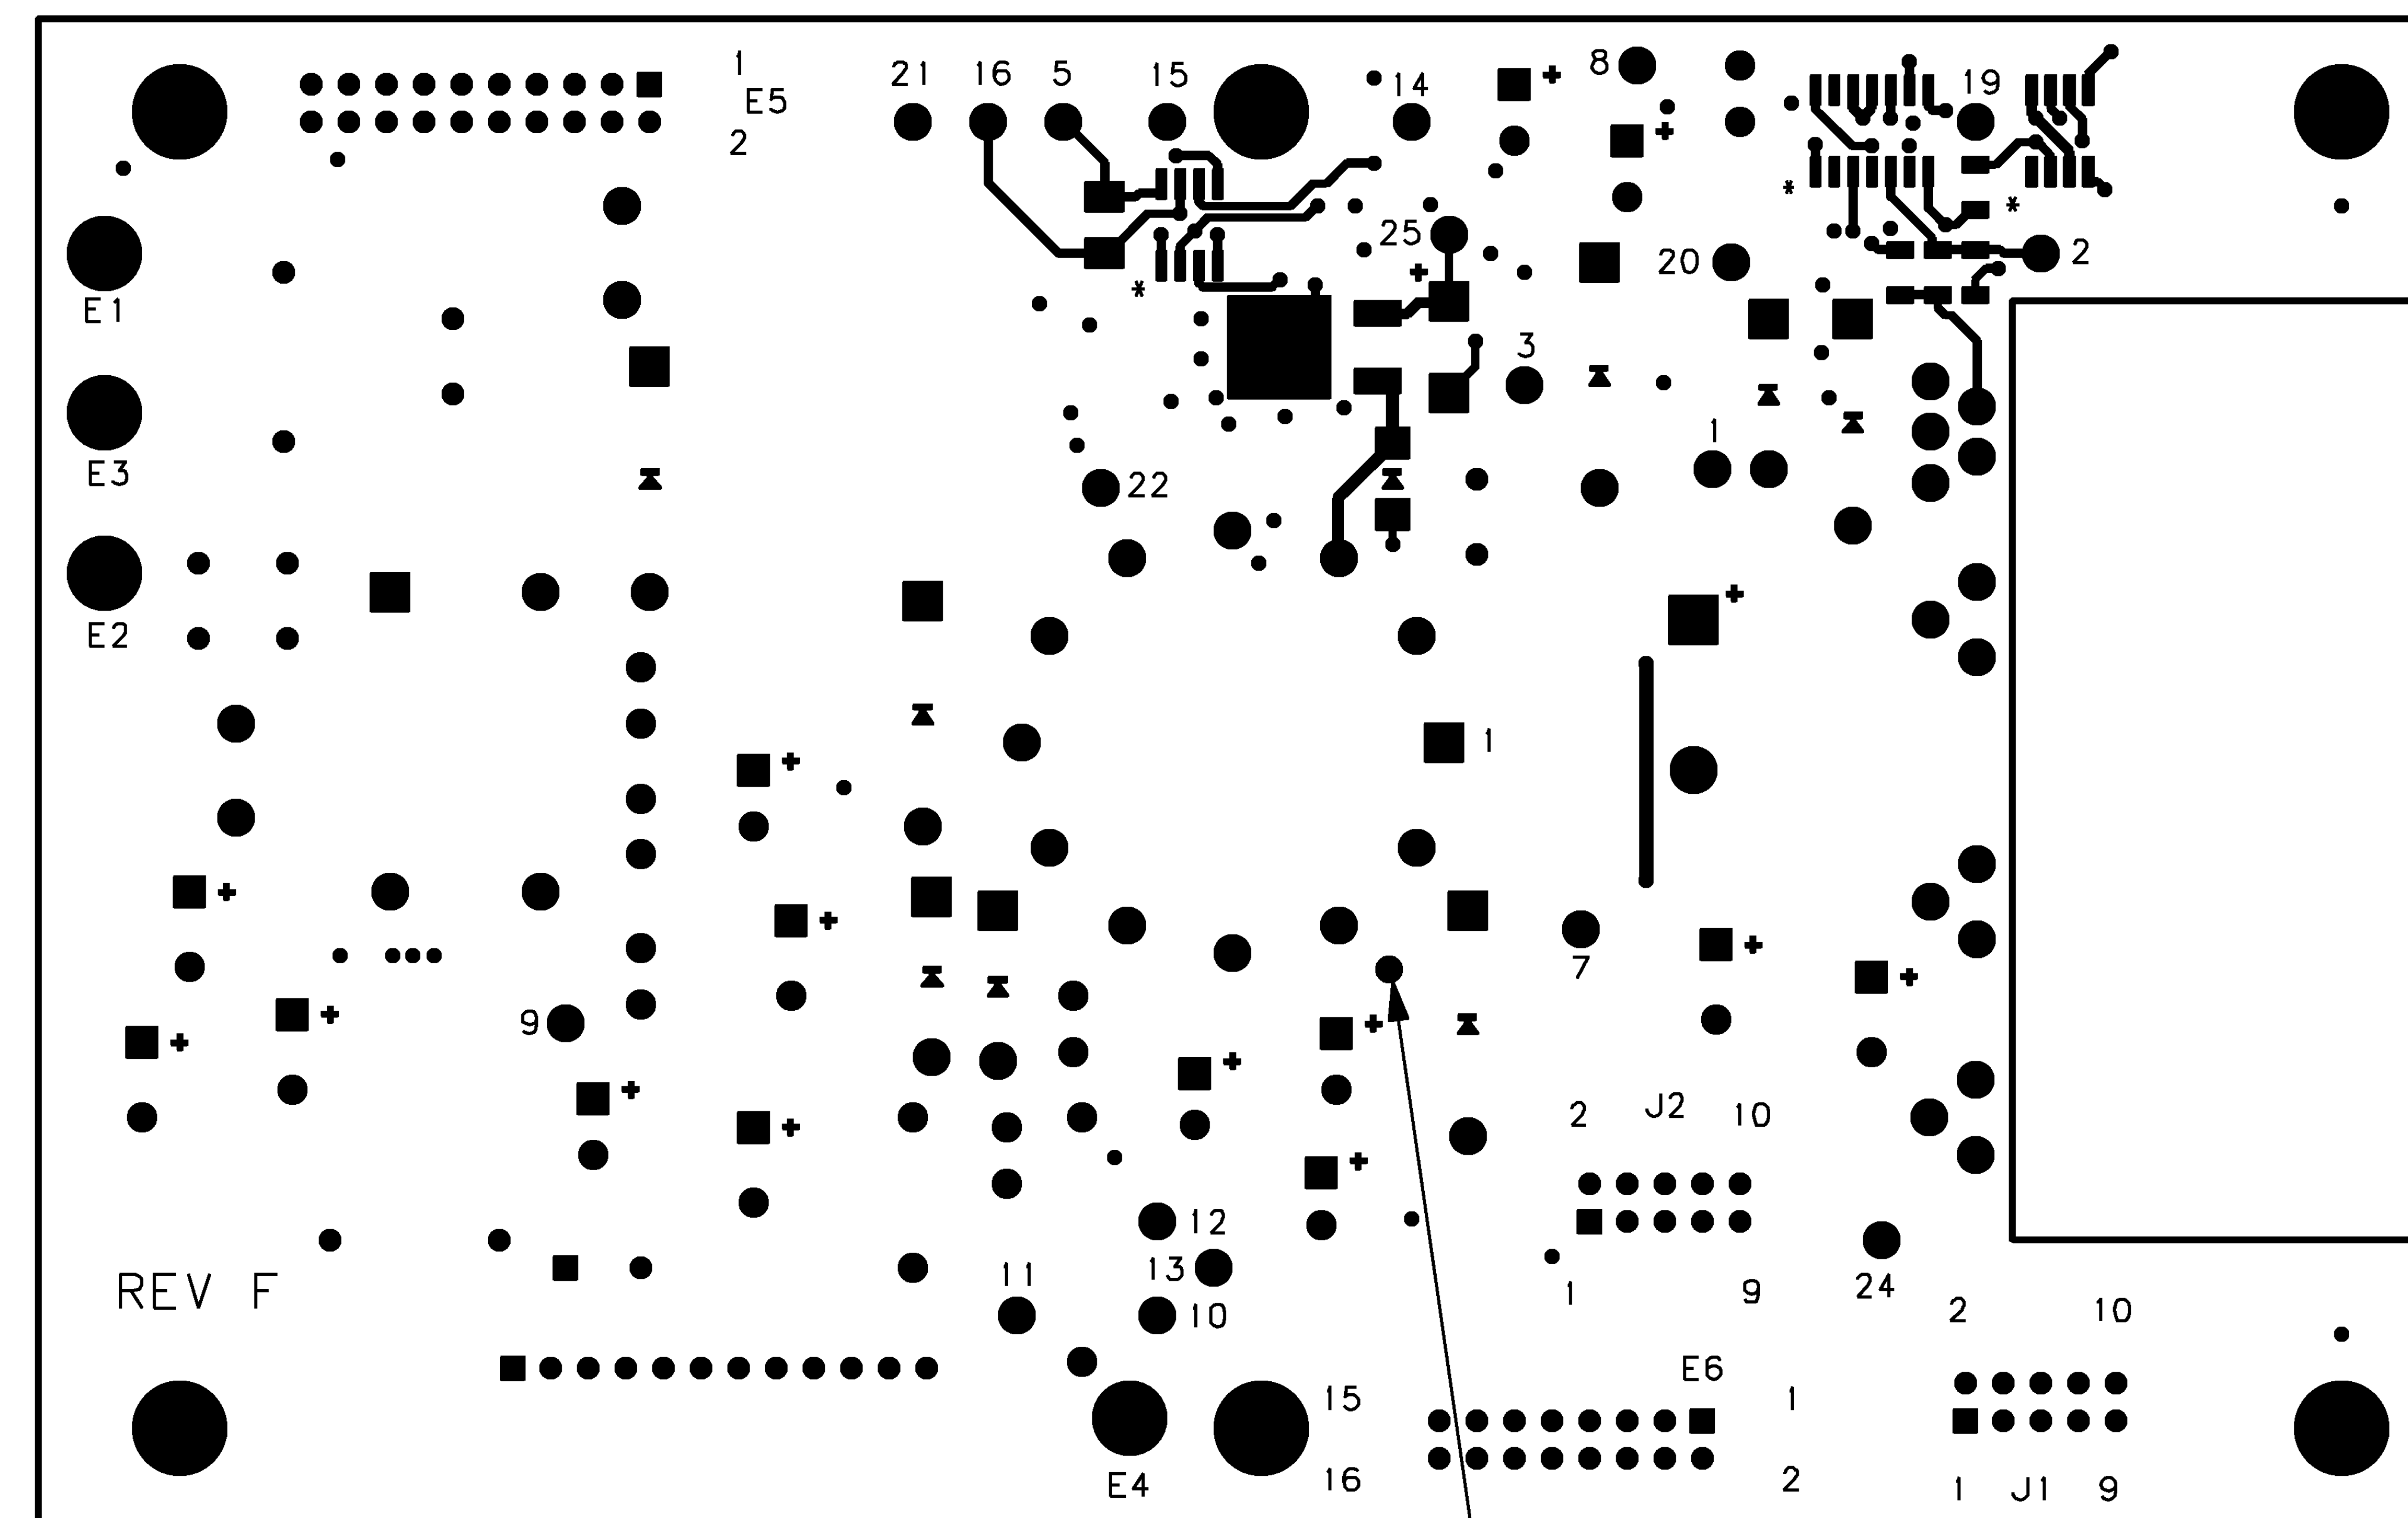

5 (REF.)



NOTES:

1. PRIOR TO POST COATING BOTH SIDES OF P.C. BOARD WITH PN 016-01040-0000, MASK OFF THE FOLLOWING: E1-E6, J1-J2, TP1-TP25, FAR SIDE OF ITEM 6, MTG1-MTG6.
2. PRINTED CIRCUIT ASSEMBLY IDENTIFICATION MUST BE IN ACCORDANCE WITH SPEC. 001-01101-0000.
3. UNLESS OTHERWISE SPECIFIED, SCREWS TO BE TIGHTENED TO TORQUE SPEC. 001-01100-0000. WHERE APPLICABLE, LIQUID STAKE ALL FASTENERS PER SPEC. 001-01080-0000.
4. APPLY RTV (P/N 016-01082-0000) BETWEEN COMPONENTS AS SHOWN BY DARK AREAS. RTV SHOULD EXTEND FROM P.C. BOARD TO AT LEAST 50% OF THE HEIGHT OF THE COMPONENT.
5. INSTALL T1 WITH UNUSED PIN (3) ADJACENT TO ORIENTATION DOT ON BOARD.
6. KEY J1 AND J2 BY REMOVING PIN 2 FROM J1 AND REMOVING PIN 9 FROM J2.




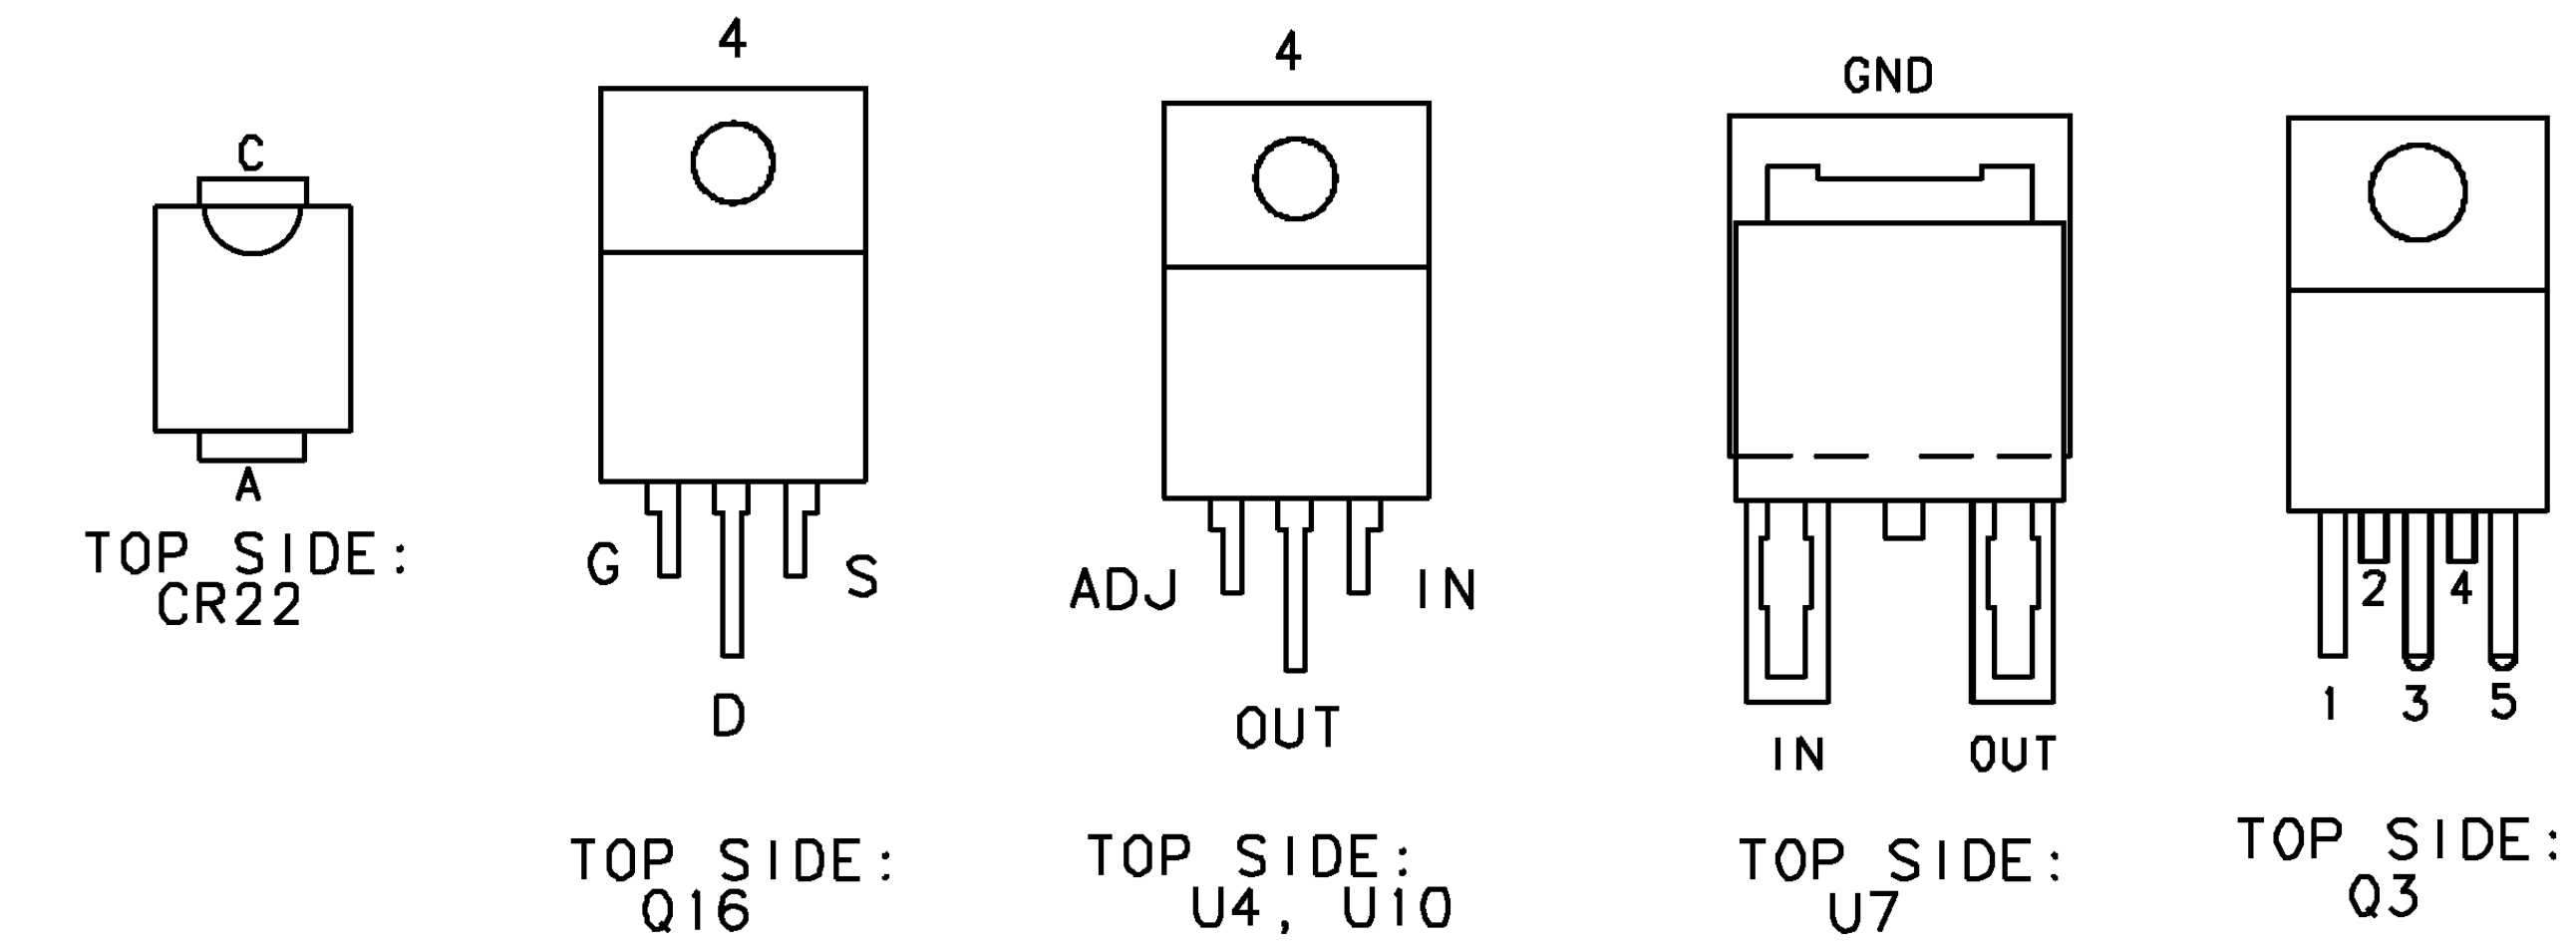


Proprietary Notice
This document and all information contained herein are the property of Honeywell International Inc, are provided in confidence, and may not be used, duplicated or disclosed to a third party, in whole or in part, without prior written permission from Honeywell International Inc.
Copyright 2000 Honeywell International Inc. All rights reserved.

MENTOR GRAPHICS DRAWING; TO BE MAINTAINED BY P.C. DESIGN

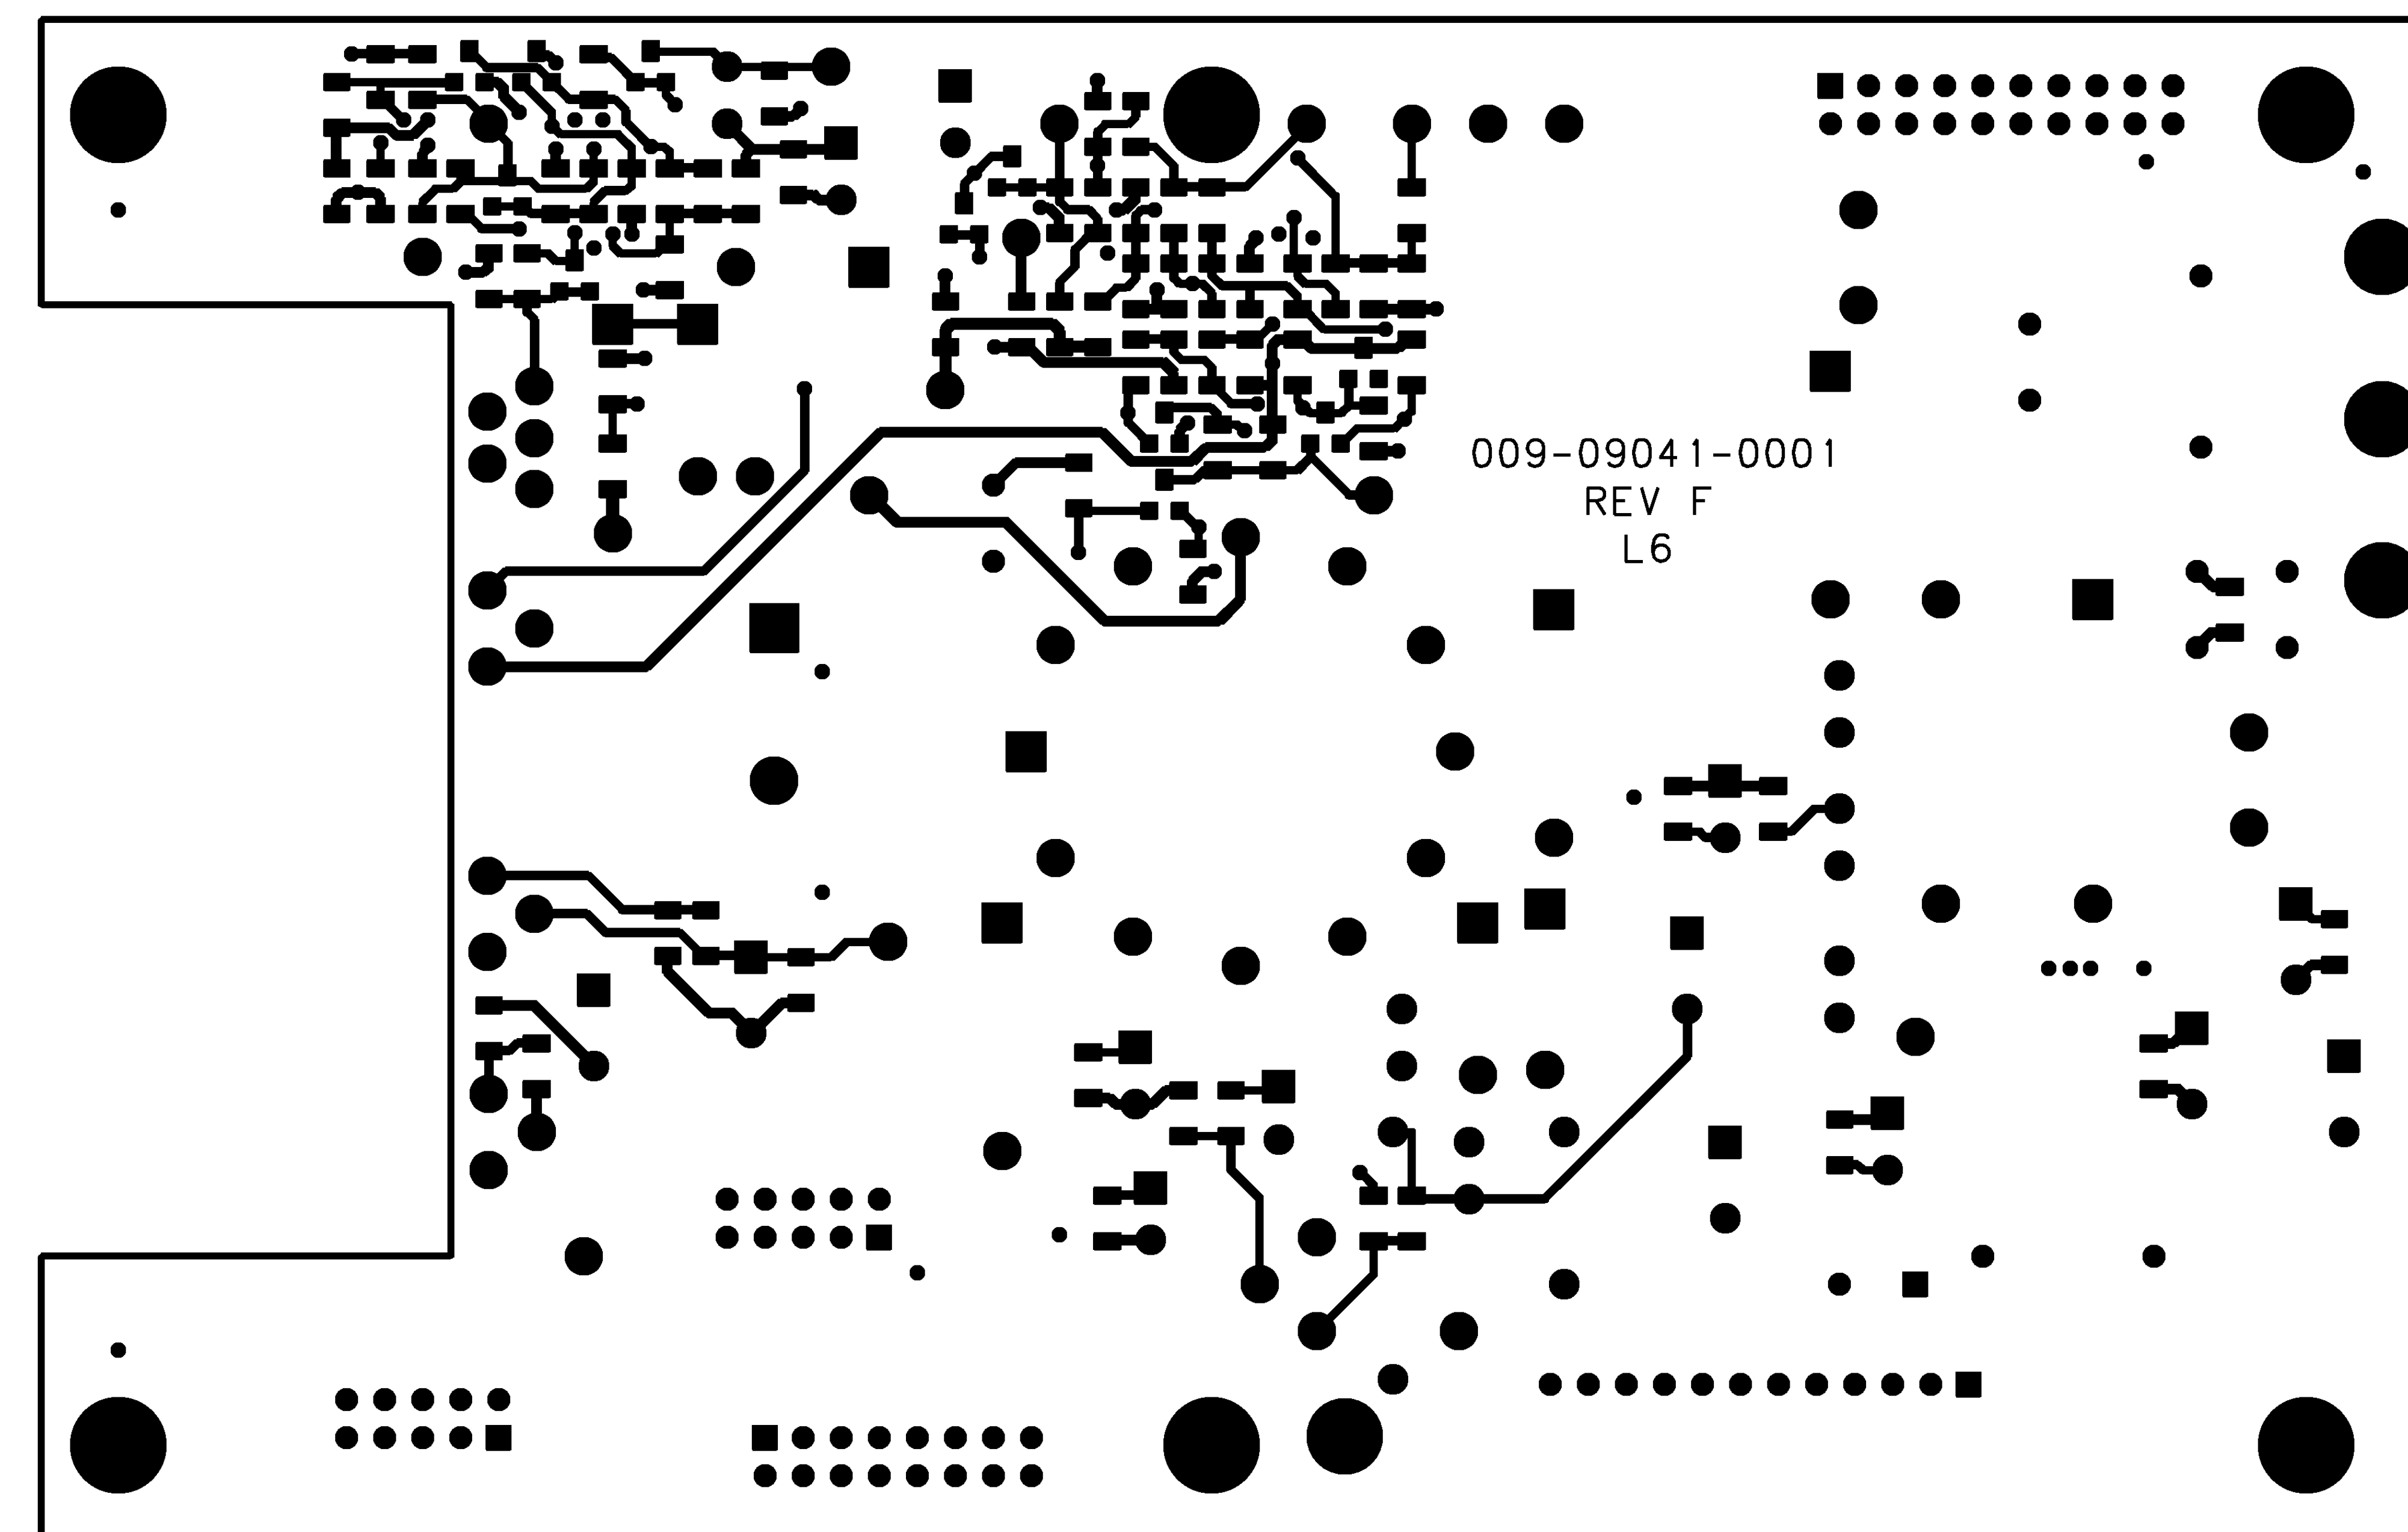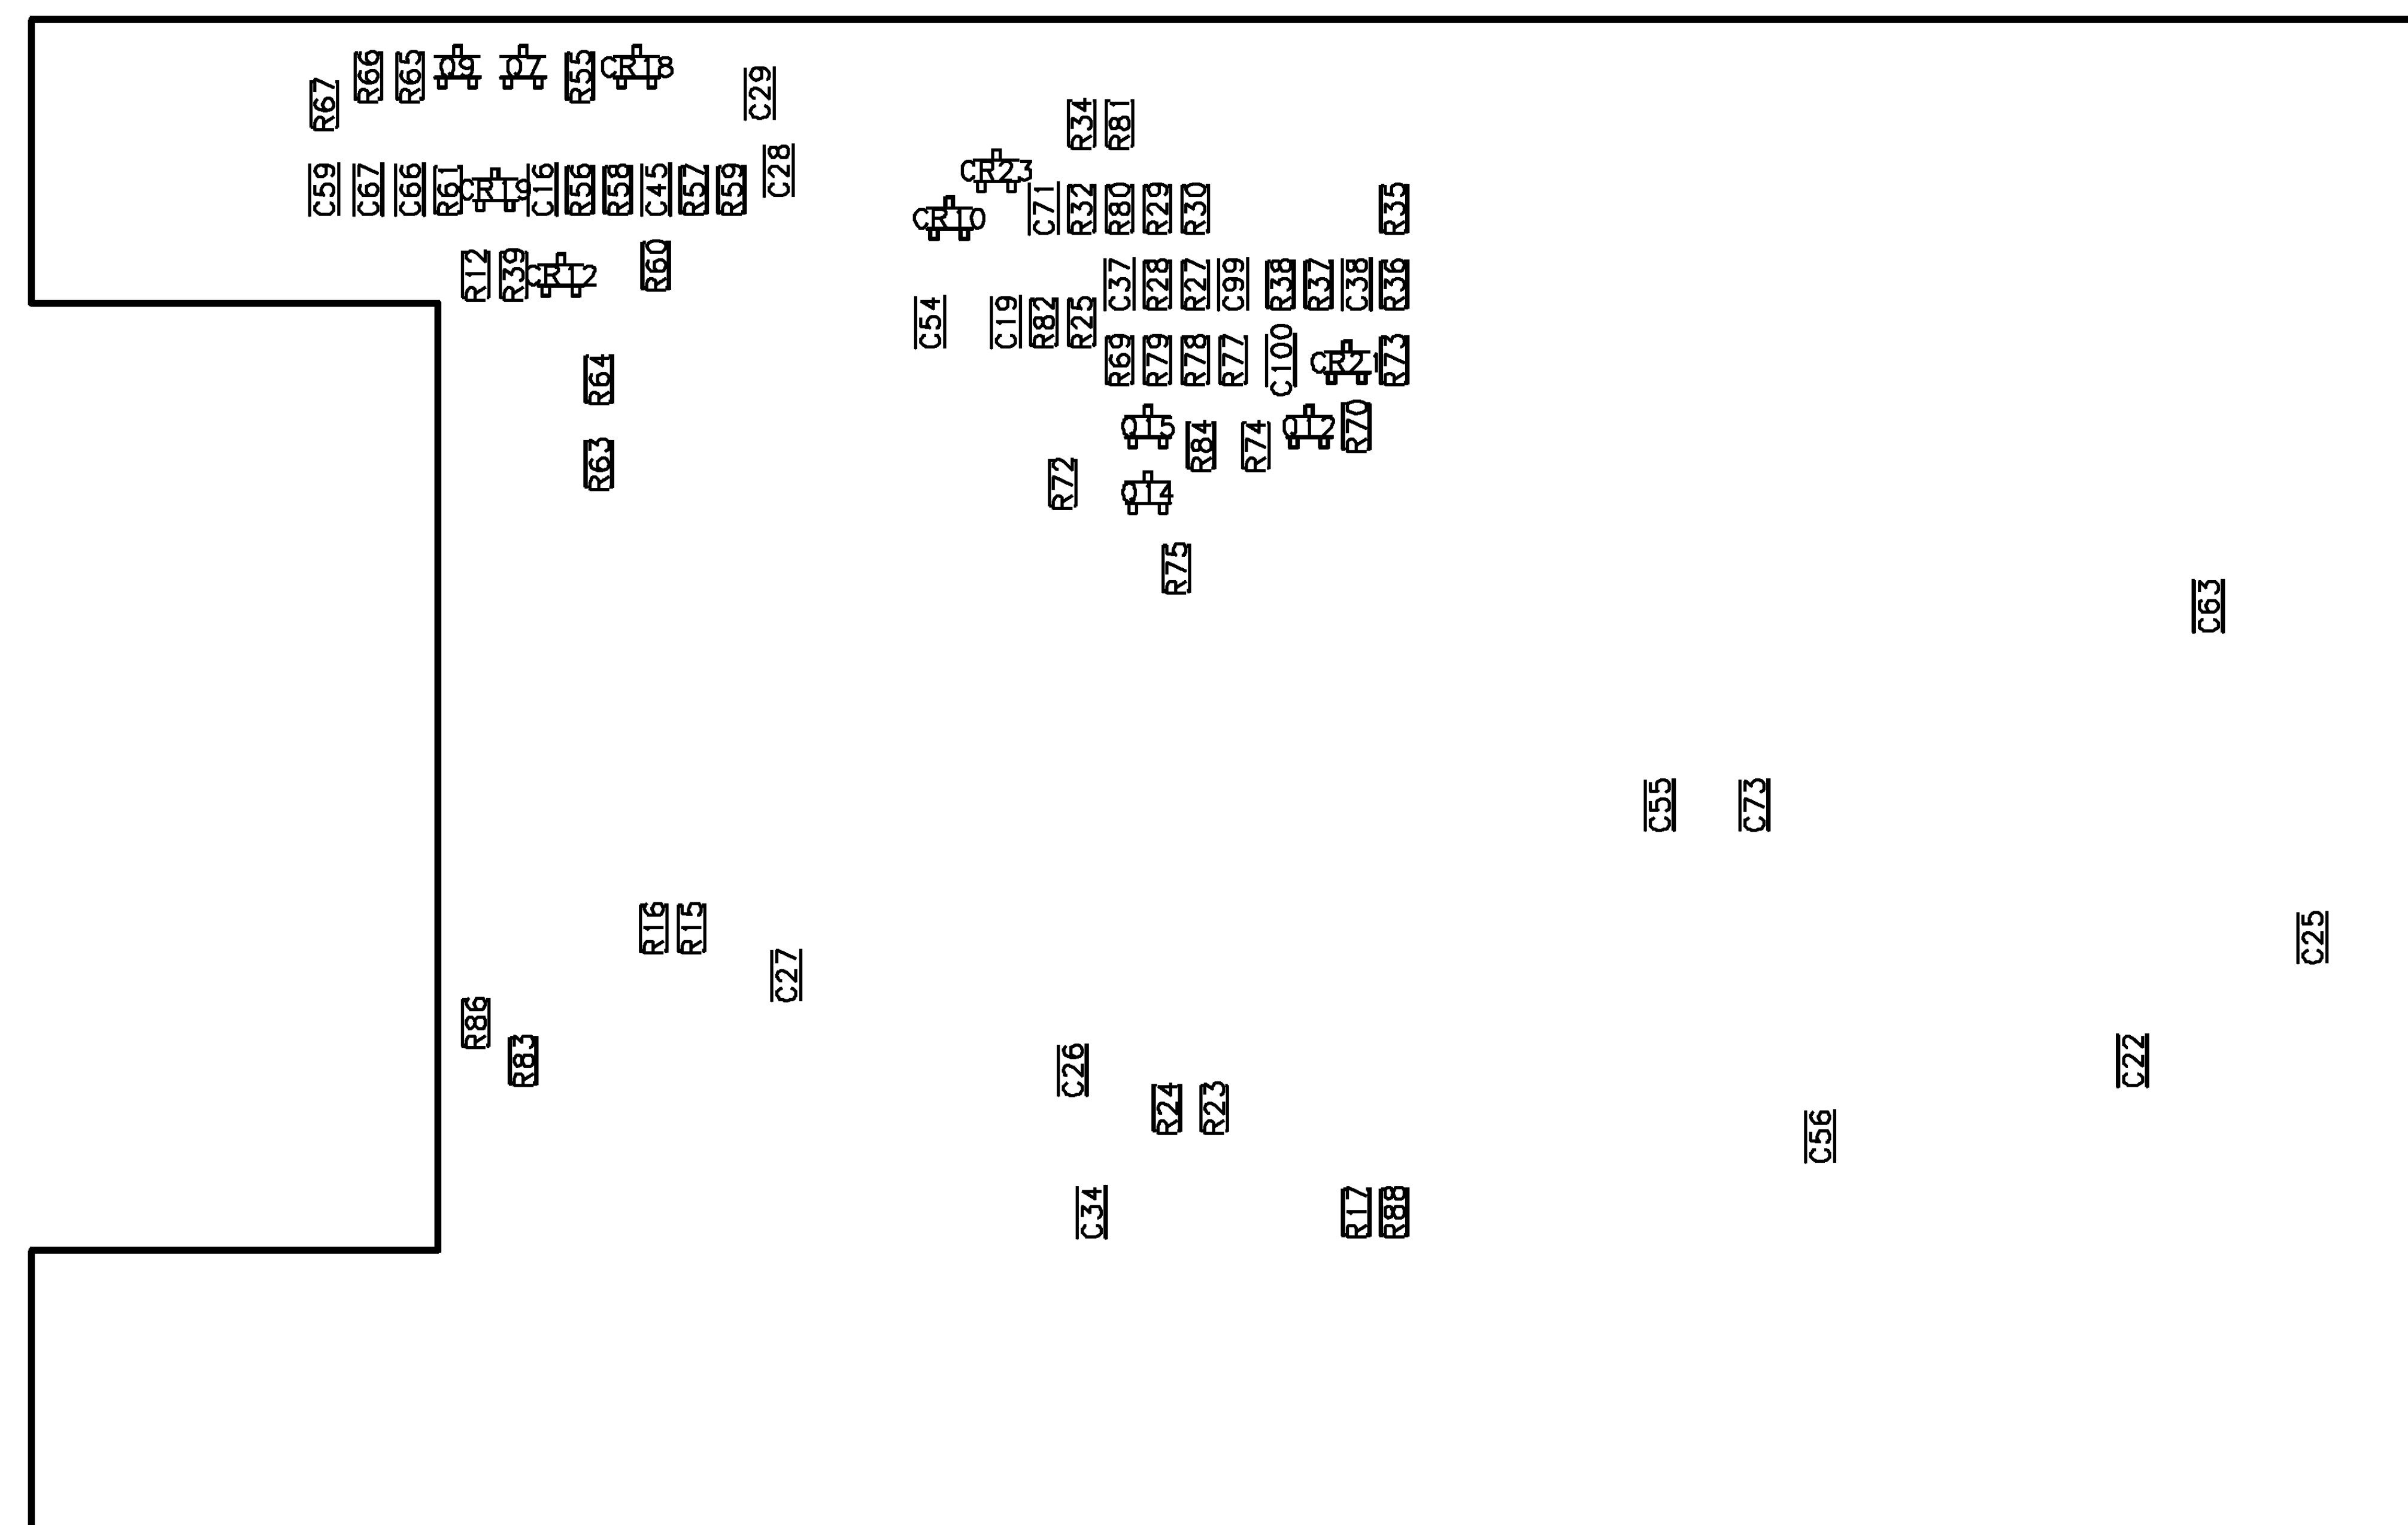

FAR SIDE VIEW OF PC BOARD

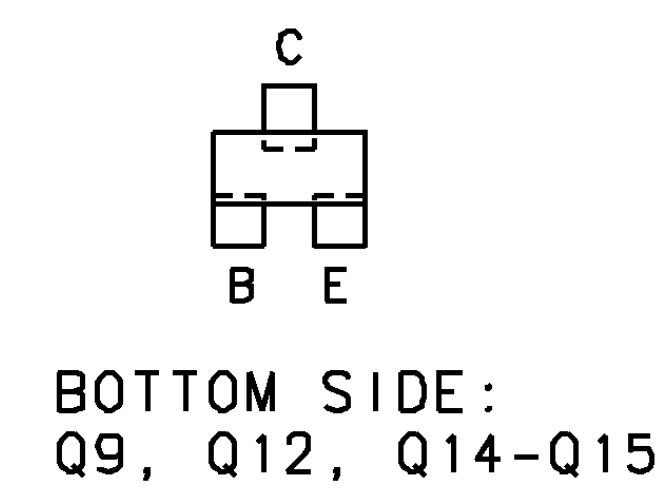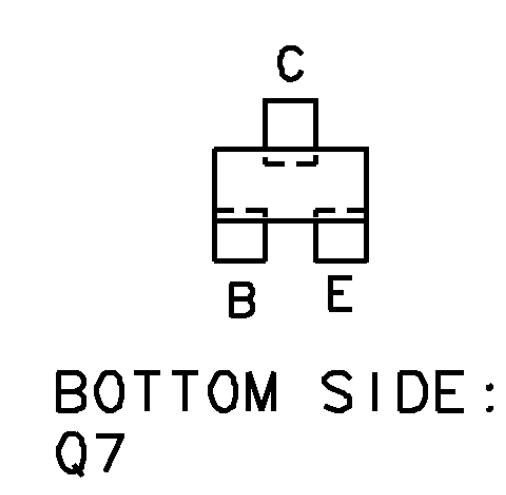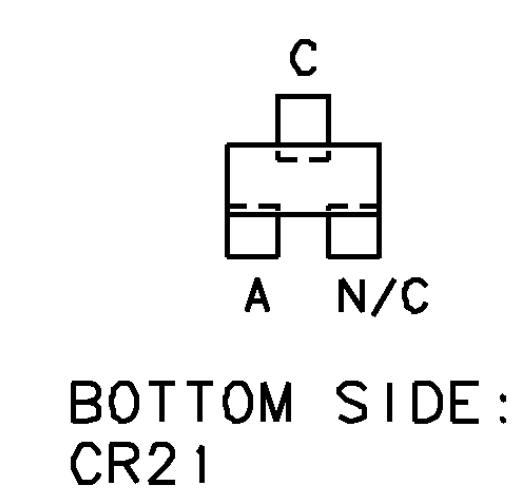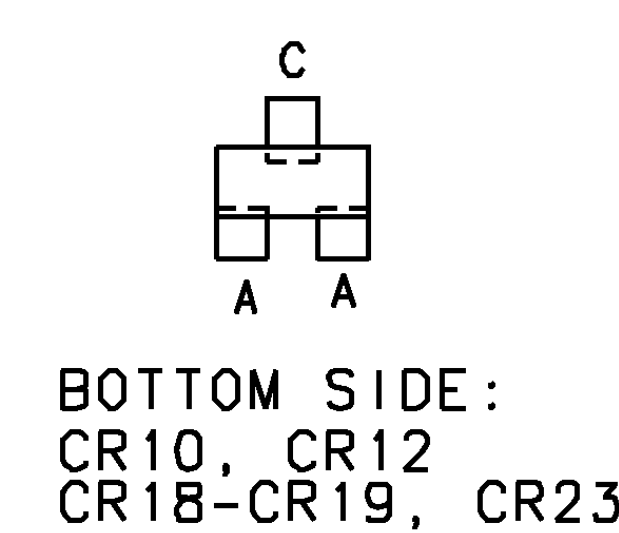

THIS DRAWING IS NOT COMPLETE WITHOUT
PARTS LIST 200-09041-0000

MENTOR GRAPHICS DRAWING; TO BE MAINTAINED BY P.C. DESIGN

[illegible]