

LIST OF EXHIBITS

| DESCRIPTION | EXHIBIT | FCC REFERENCE |
|--|----------|-------------------------------|
| I. Identification Label Information & General Information | 1A 1B | 2.925(a), 2.1033(c)11, 2.1065 |
| A. Production Plans | | |
| B. Application References | | 2.948, 2.1061 |
| C. Data Submittal Procedure | | |
| II. Certification of Data | 2 | 2.1517(g) |
| III. External Photographs | 3 | 2.1033(c)12 |
| IV. Circuit Description | 4 | 2.1033(c)10 |
| V. Schematic Diagrams | 5 | 2.1033(c)10 |
| A. RF PA | 5A | |
| B. Exciter | 5B | |
| VI. Test Report | 6 | |
| A. Data Index | 6 | 2.1033(c), 2.1041 |
| B. RF Output Data | 6A | 2.1033(c)8, 2.1046(a) |
| C. Modulation Characteristics | | 2.1047 |
| 1. Audio Response | 6B-1 | 2.1047(a) |
| 2. Low Pass Filter Response | 6B-2 | 2.1047(a) |
| 3. Modulation Limiting vs. Frequency | 6B-3 | 2.1047(b) |
| 4. Modulation Limiting vs. Audio Level | 6B-4 | 2.1047(b) |
| D. Occupied Bandwidth | 6C | 2.1049 |
| 1. 25 kHz Audio (Voice) | 6C-1 | 2.1049(c)1 |
| 2. 12.5 kHz Audio (Voice) | 6C-2 | 2.1049(c)1 |
| 3. 25/12.5 kHz 9600 bps Digital Voice | 6C-3 | 2.1049(h) |
| 4. 25/12.5 kHz 9600 bps Digital Data | 6C-4 | 2.1049(h) |
| 5. 25 kHz 12000 baud Digital Voice Encryption | 6C-5 | 2.1049(h) |
| E. Conducted Spurious Emissions | 6D | 2.1051 |
| F. Radiated Spurious Emissions | 6E | 2.1053 |
| G. Frequency Stability | | 2.1055, 90.213 |
| 1. Temperature | 6F-1 | 2.1055(a)1, 2.1055(b) |
| 2. Supply Voltage | 6F-2 | 2.1055(d)1 |
| H. Transient Frequency Behavior | 6G | 90.214 |
| I. Power Line Conducted Emissions | 6H | 15.107 |
| VII. Test Set-up Procedures | 7 | 2.1033(c)14 |
| VIII. Instruction Manual | 8 | 2.1033(c)3 |
| IX. Internal Photographs | 9 | 2.1033(c)12 |
| X. Parts List and Tune-Up Procedures | 10 | 2.1033(c)9,10 |
| XI. RF Exposure Information | 11 | 2.1091 |
| XII. Operational Description | 12 | 2.1033(c)10 |
| 1. Technical Characteristics and Application | | |
| XIII. Cover Letter | 13 | |

IDENTIFICATION LABEL

Pursuant to 47CFR 2.925(a), 2.1033(c), 2.1065

Location


Top right corner of unit operating panel. (See attached photograph in Exhibit 3A)


Type

The label is a paper polyester film laminate with a pressure sensitive adhesive backing. The adhesive is a permanent type acrylic with a minimum peel strength of 40 oz/inch.

Markings (TEXT)

Sketch of label showing FCC ID. Also shown in Exhibit 1A is an enlarged photograph of label.

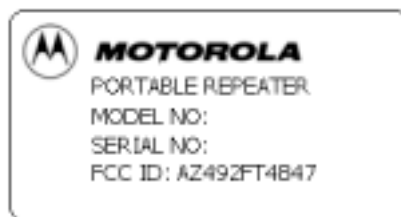

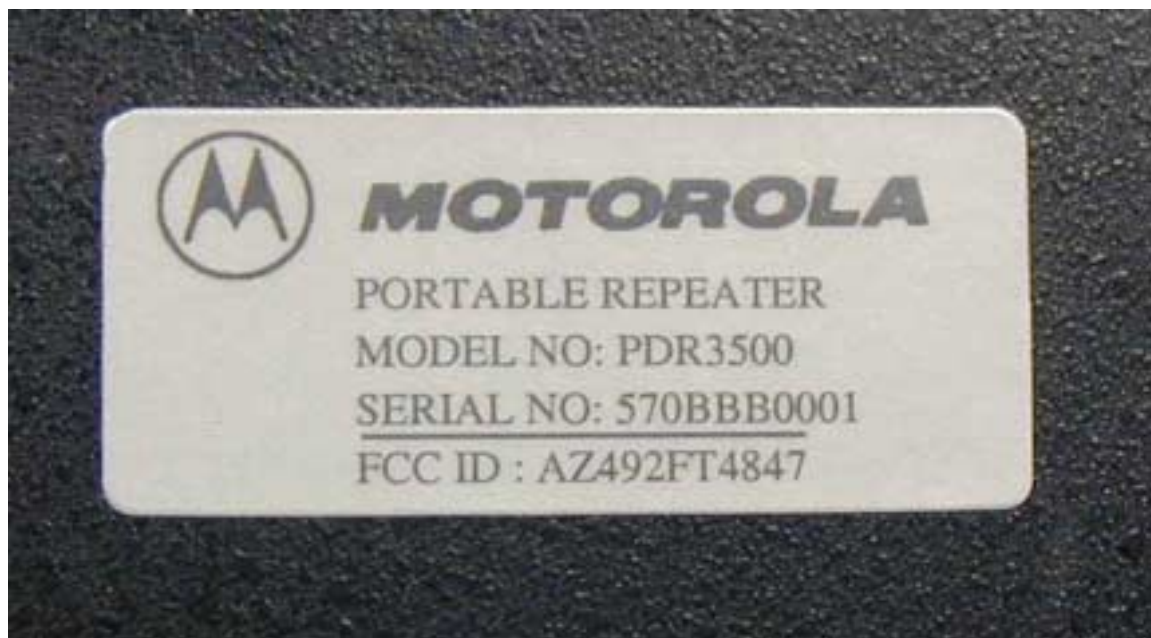

IDENTIFICATION LABEL

GENERAL INFORMATION

I. **Production Plans**

Quantity production is planned

II. **Application References -- Pursuant to 47CFR 2.948 and 2.1061**

Reference is made to the following Motorola "Application References"

1. Open Area Test Site "OATS" (FCC Registration 91932/ Industry of Canada IC3679).

III. **Data Submittal Procedure**

Data in Exhibit 6 is supplied in accordance with Part 2, Sub-part J and Part 90, Sub-part I and Sub-part S of the Commissions' rules.

IV. **Applicable References**

Similar Type Accepted Transmitter FCC ID: AZ492FT4843

TIA/EIA-603-1 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

TIA/EIA-102.CAAB and TIA/EIA-IS-102.CAAA

Code of Federal Regulations Title 47 Rule Parts 2, 15, and 90