


4.2 Configuration and peripherals

■: Ferrite core

AC input: AC100V/50Hz

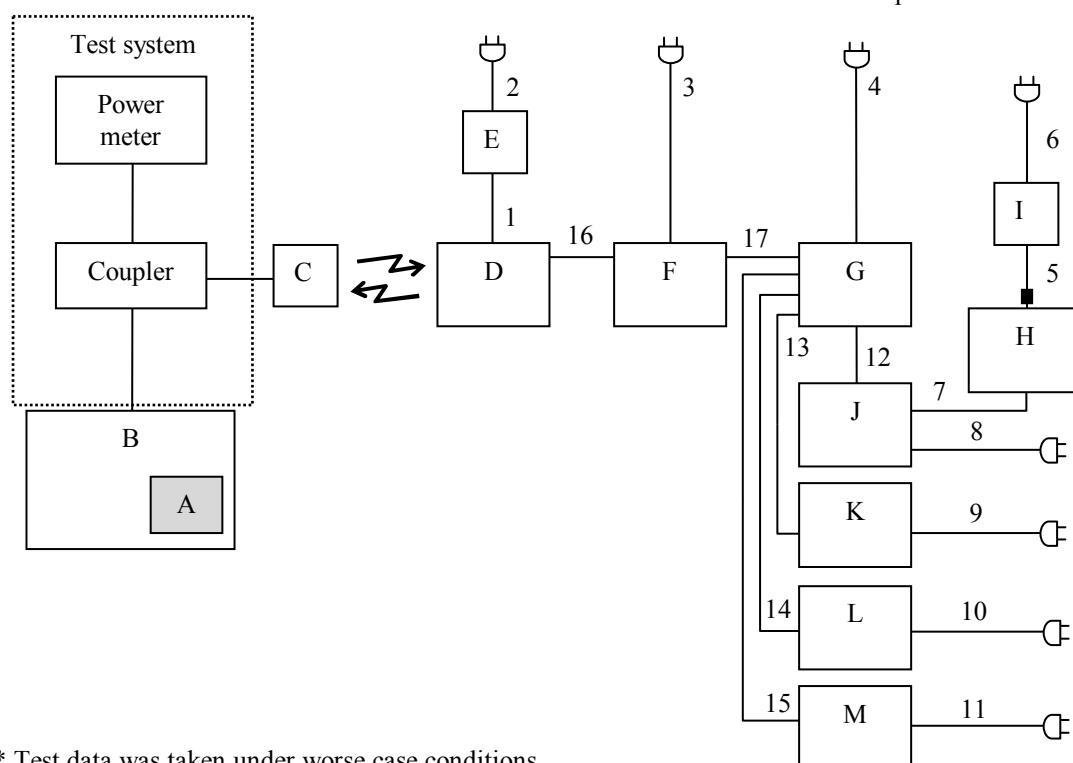

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	SDIO Wireless Module	SX-SDMAN	008092 620886	silex technology, Inc.	EUT
B	Vital sign telemeter	GZ-130P OPNo.30A	A00034	Nihon Kohden	-
C	Antenna	MAP24064	-	Laird	-
D	IEEE 802.11n/a/b/g Access point	YS-109P0	A003	Nihon Kohden	-
E	AC adaptor	KSW514WA	-	Nihon Kohden	-
F	Network TAP	SC910GS	-	SYSCOM	-
G	HUB	CO-BSW16TX	12129601403007 28 Rev.A3	Corega	-
H	LCD display unit	VL-611R	00871	Nihon Kohden	-
I	AC adaptor	HEMP100G-S120650 -7L	3316001803FO-H-126R-01CA	HiTRON	-
J	Central monitor	CNS-6201	01125	Nihon Kohden	-
K	Central monitor	CNS-6201	00941	Nihon Kohden	-
L	Central monitor	CNS-6201	00589	Nihon Kohden	-
M	Central monitor	CNS-6201	00590	Nihon Kohden	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

List of cables used

No.	Cable Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC	1.8	Unshielded	Unshielded	-
2	AC	0.8	Unshielded	Unshielded	-
3	AC	1.5	Unshielded	Unshielded	-
4	AC	1.5	Unshielded	Unshielded	-
5	DC	1.0	Unshielded	Unshielded	-
6	AC	2.0	Unshielded	Unshielded	-
7	DVI	1.5	Shielded	Shielded	-
8	AC	2.0	Unshielded	Unshielded	-
9	AC	2.0	Unshielded	Unshielded	-
10	AC	2.0	Unshielded	Unshielded	-
11	AC	2.0	Unshielded	Unshielded	-
12	LAN	2.0	Unshielded	Unshielded	-
13	LAN	2.0	Unshielded	Unshielded	-
14	LAN	2.0	Unshielded	Unshielded	-
15	LAN	2.0	Unshielded	Unshielded	-
16	LAN	2.0	Unshielded	Unshielded	-
17	LAN	1.0	Unshielded	Unshielded	-

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

APPENDIX 3: Photographs of test setup



END OF REPORT

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401