

Page: 1 of 347

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Phablet Equipment Under Test

HP **Brand Name**

HSTNH-F606 Model No.

HP Inc. **Company Name**

3390 East Harmony Road Fort Collins, Colorado 80528 **Company Address**

United States

IEEE /ANSI C95.1, C95.3, IEEE 1528, **Standards**

> KDB248227D01v02r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB941225D01v03r01, KDB941225D05v02r05, KDB941225D05A v01r02,

KDB941225D06v02r01,KDB447498D01v06.

KDB648474D01v01r03

Date of Receipt Apr. 21, 2016

Date of Test(s) Apr. 27, 2016 ~ May. 13, 2016

Date of Issue Jun. 24, 2016

In the configuration tested, the EUT complied with the standards specified above.

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed	on	behal	lf of	SGS
--------	----	-------	-------	-----

Asst. Supervisor Sr. Engineer

Afu Chen John Yeh

Chen

Date: Jun. 24, 2016 Date: Jun. 24, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 2 of 347

Revision History

Report Number	Revision	Description	Issue Date
EN/2016/40002	Rev.00	Initial creation of document	May. 25, 2016
EN/2016/40002	Rev.01	1 st modification	Jun. 17, 2016
EN/2016/40002	Rev.02	2 nd modification	Jun. 24, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 3 of 347

Contents

1. General Information	4
1.1 Testing Laboratory	
1.2 Details of Applicant	4
1.3 Description of EUT	5
1.4 Test Environment	61
1.5 Operation Description	61
1.6 Positioning Procedure	67
1.7 Evaluation Procedures	68
1.8 Probe Calibration Procedures	70
1.9 The SAR Measurement System	73
1.10 System Components	75
1.11 SAR System Verification	77
1.12 Tissue Simulant Fluid for the Frequency Band	79
1.13 Test Standards and Limits	83
2. Summary of Results	85
3. Simultaneous Transmission Analysis	104
3.1 Estimated SAR calculation	106
3.2 SPLSR evaluation and analysis	106
4. Instruments List	162
5. Measurements	164
6. SAR System Performance Verification	225
7. DAE & Probe Calibration Certificate	
8. Uncertainty Budget	
9. Phantom Description	
10. System Validation from Original Equipment Supplier	
IV. SVSICIII VAIIUALIUII IIVIII VIIVIIIAI LUUIDIIICIIL SUDDIICI	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 4 of 347

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory						
No.134, Wu Kung Ro	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipe					
City, Taiwan						
Tel	+886-2-2299-3279					
Fax	+886-2-2298-0488					
Internet	http://www.tw.sgs.com/					

1.2 Details of Applicant

Company Name	HP Inc.
ICOMPANY Addross	3390 East Harmony Road Fort Collins, Colorado 80528 United States

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 347

1.3 Description of EUT

EUT Name	Phablet					
Brand Name	HP					
Model No.	HSTNH-F606					
FCC ID	B94HHF606					
	⊠GSM ⊠GPRS ⊠EDGE					
	⊠WCDMA ⊠HSDPA ⊠HSUP.	A ⊠H	SPA+			
Mode of Operation	☑LTE FDD					
	⊠WLAN802.11 a/b/g/n(20M/40M)/ac(20M/40N	1/80M)			
	⊠Bluetooth					
	GSM		1/8.3			
			(1Dn4			
	GPRS	1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP)				
		1/4.1 (1DH20P) 1/8.3 (1Dn1UP)				
		1/2 (1Dn4UP)				
	EDGE	1/2.76 (1Dn3UP)				
Duty Cycle		1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)				
	LTE FDD	1/0.0	,	101)		
	(data only, not suppot VoLTE)	1				
	WCDMA	1				
	WLAN802.11 a/b/g/n(20M/40M)/ ac(20M/40M/80M)					
	Bluetooth		1			
	GSM850	824.2	_	848.8		
TV F	GSM1900	1850.2	_	1909.8		
TX Frequency Range (MHz)	WCDMA Band II	1852.4	_	1907.6		
(···· · -)	WCDMA Band IV	1712.4	_	1752.6		
	WCDMA Band V	826.4	_	846.6		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 6 of 347

	LTE FDD Band II	1850	_	1910
	LTE FDD Band IV	1710	_	1755
	LTE FDD Band V	824	_	849
	LTE FDD Band VII	2500	_	2570
	LTE FDD Band XII	699	_	716
	LTE FDD Band XVII	704	_	716
	LTE FDD Band XXX	2305	_	2315
	WLAN802.11 b/g/n(20M)	2412	_	2462
	WLAN802.11 n(40M)	2422	_	2452
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	5180	_	5240
TX Frequency Range	WLAN802.11 n(40M)/ac(40M) 5.2G	5190	_	5230
(MHz)	WLAN802.11 ac(80M) 5.2G		5210	
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	5260	_	5320
	WLAN802.11 n(40M)/ac(40M) 5.3G	5270	_	5310
	WLAN802.11 ac(80M) 5.3G		5290	
	WLAN802.11 a/n/ac(20M) 5.6G	5500	_	5720
	WLAN802.11 n/ac(40M) 5.6G	5510	_	5710
	WLAN802.11 ac(80M) 5.6G	5530	_	5690
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	5745	_	5825
	WLAN802.11 n(40M)/ac(40M) 5.8G	5710	_	5795
	WLAN802.11 ac(80M) 5.8G		5775	
	Bluetooth	2402	_	2480
	GSM850	128	_	251
Channel Number	GSM1900	512		810
(ARFCN)	WCDMA Band II	9262		9538
	WCDMA Band IV	1312	_	1513

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 7 of 347

	WCDMA Band V	4132	_	4233
	LTE FDD Band II	18607	_	19193
	LTE FDD Band IV	19957	_	20393
	LTE FDD Band V	20407	_	20643
	LTE FDD Band VII	20775	_	21425
	LTE FDD Band XII	23007	_	23173
	LTE FDD Band XVII	23755	_	23825
	LTE FDD Band XXX	27685	_	27735
	WLAN802.11 b/g/n(20M)	1	_	11
	WLAN802.11 n(40M)	3	_	9
Channel Number	WLAN802.11 a/n(20M)/ac(20M) 5.2G	36	_	48
(ARFCN)	WLAN802.11 n(40M)/ac(40M) 5.2G	38	_	46
	WLAN802.11 ac(80M) 5.2G		42	
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	52	_	64
	WLAN802.11 n(40M)/ac(40M) 5.3G	54	_	62
	WLAN802.11 ac(80M) 5.3G	58		
	WLAN802.11 a/n/ac(20M) 5.6G	100	_	144
	WLAN802.11 n/ac(40M) 5.6G	102	_	142
	WLAN802.11 ac(80M) 5.6G	106	_	138
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	149	_	165
	WLAN802.11 n(40M)/ac(40M) 5.8G	142	_	159
	WLAN802.11 ac(80M) 5.8G		155	
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 8 of 347

Max. SAR (1 g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel		
	GSM 850	0.237	0.360	□Left ⊠Right ⊠Cheek □Tilt 190 Channel		
	GSM 1900	0.336	0.397	☐Left ☐Right ☑Cheek ☐Tilt 810 Channel		
	WCDMA Band II	0.626	0.701	□Left ⊠Right ⊠Cheek □Tilt 9538 Channel		
	WCDMA Band IV	0.613	0.724	□Left ⊠Right ⊠Cheek □Tilt 1513 _Channel		
	WCDMA Band V	0.311	0.360	☐Left ⊠Right ⊠Cheek ☐Tilt 4183 Channel		
Head	WLAN802.11 b	0.802	0.975	□Left ⊠Right ⊠Cheek □Tilt <u>6</u> Channel		
	WLAN802.11 a 5.2G	1.290	1.332	□Left ⊠Right ⊠Cheek □Tilt <u>36</u> Channel		
	WLAN802.11 n(20M) 5.2G	0.970	0.997	□Left ⊠Right ⊠Cheek □Tilt44Channel		
	WLAN802.11 n(40M) 5.2G	1.200	1.271	□Left ⊠Right ⊠Cheek □Tilt <u>46</u> Channel		
	WLAN802.11 ac(40M) 5.2G	0.924	1.091	☐Left ☐Right ☐Cheek ☐Tilt ☐Channel		
	WLAN802.11 a 5.3G	1.300	1.340	□Left ⊠Right ⊠Cheek □Tilt56Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 9 of 347

	Max. SAR (1 g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel			
	WLAN802.11 n(20M) 5.3G	0.993	1.062	□Left ⊠Right ⊠Cheek □Tilt52Channel			
Hond	WLAN802.11 n(40M) 5.3G	1.030	1.261	□Left ⊠Right ⊠Cheek □Tilt <u>62</u> Channel			
Head	WLAN802.11 ac(40M) 5.3G	1.020	1.238	□Left ⊠Right ⊠Cheek □Tilt 62Channel			
	WLAN802.11 a 5.6G	1.180	1.241	□Left ⊠Right ☑Cheek □Tilt <u>120</u> Channel			
	WLAN802.11 n(20M) 5.6G	0.819	0.862	□Left ⊠Right ☑Cheek □Tilt <u>100</u> Channel			
Head	WLAN802.11 ac(80M) 5.6G	0.872	0.930	□Left ⊠Right ⊠Cheek □Tilt <u>122</u> Channel			
	WLAN802.11 a 5.8G	0.916	0.975	□Left ⊠Right ⊠Cheek □Tilt <u>165</u> Channel			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 347

Max. SAR (1 g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel		
	GSM 850	0.369	0.560	☐Front ☐Back Channel		
	GSM 1900	0.457	0.602	☐Front ☐Back 512 _Channel		
Body-worn	WLAN802.11 n(40M) 5.2G	0.279	0.290	☐Front ⊠Back 38 Channel		
	WLAN802.11 n(40M) 5.3G	0.539	0.541	☐Front ⊠Back 62 Channel		
	WLAN802.11 a 5.6G	0.740	0.782	☐Front ⊠Back 140 _Channel		
	WLAN802.11 ac(80M) 5.6G	0.769	0.783	☐Front ☐Back Channel		
	WLAN802.11 a 5.8G	0.543	0.578	☐Front ⊠Back 149Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 347

	Max. SAR (1 g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel			
	GPRS 850 (1Dn4UP)	0.505	0.614	<pre></pre>			
	GPRS 1900 (1Dn3UP)	0.582	0.693	☐Front ☐Back ☐Bottom ☐Right ☐Left810 Channel			
	WCDMA Band II	0.913	1.041	☐Front ☐Back ☐Bottom ☐Right ☐Left 9400 Channel			
Hotspot mode	WCDMA Band IV	0.770	0.917	☐Front ☐Back ☐Bottom ☐Right ☐Left			
	WCDMA Band V	0.583	0.638				
	LTE FDD Band II	0.848	0.928	<pre></pre>			
	LTE FDD Band IV	0.924	1.025	☐Front ☐Back ☐Bottom ☐Right ☐Left			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 12 of 347

	Max. SAR (1	g) (Unit: \	N/Kg)	
Mode	Band	Measured	Reported	Position / Channel
	LTE FDD Band V	0.500	0.650	<pre></pre>
	LTE FDD Band VII	0.969	1.045	<pre></pre>
	LTE FDD Band XII	0.242	0.272	☐Front ☐Back ☐Bottom ☐Right ☐Left 23130 Channel
Hotspot mode	LTE FDD Band VXII	0.235	0.264	☐Front ☐Back ☐Bottom ☐Right ☐Left
	LTE FDD Band XXX	0.637	0.789	<pre></pre>
	WLAN802.11 b	0.315	0.383	☐Front ☐Back ☐Bottom ☐Right ☐Left 6Channel
	Bluetooth	0.049	0.077	☐Front ☐Back ☐Bottom ☐Right ☑Left <u>39</u> Channel

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 347

	Max. SAR (10	0 g) (Unit:	W/Kg)	
Mode	Band	Measured	Reported	Position / Channel
	WLAN802.11 n(40M) 5.2G	1.100	1.214	<pre></pre>
	WLAN802.11 n(40M) 5.3G	1.080	1.310	<pre></pre>
Hand	WLAN802.11 a 5.6G	2.260	2.388	☐Front ☐Back ☐Top ☐Right ☐Left 140 Channel
	WLAN802.11 ac(80M) 5.6G	2.090	2.173	☐Front ☐Back ☐Top ☐Right ☐Left 138 Channel
	WLAN802.11 a 5.8G	1.590	1.692	☐Front ☐Back ☐Top ☐Right ☐Left

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 14 of 347

GSM/GPRS/EDGE conducted power table:

EUT mode	Frequency (MHz)	СН	Max. Rated Avg. Power + Max. Tolerance	Burst average power Avg. (dBm)	Source -based time average power Avg. (dBm)
	824.2	128	(dBm) 33.5	31.62	22.59
GSM850	836.6	190	33.5	31.69	22.66
(GMSK)	848.8	251	33.5	31.72	22.69
The di	vision facto	r compared	to the numb	per of TX tir	ne slot
	Division	n factor		1 TX ti	me slot
	וטוצוטוט	i iacioi		-9.	03

			Burst avera	age power		
	ted Avg. Power olerance (dBr		33.5	30.5	28.5	27.5
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP
EUT mode	Frequency (MHz)	CH	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
GPRS	824.2	128	31.62	29.01	27.38	26.59
850	836.6	190	31.69	29.04	27.40	26.66
850	848.8	251	31.72	29.12	27.41	26.65
		S	ource-based tim	e average powe	er	
GPRS	824.2	128	22.59	22.99	23.12	23.58
850	836.6	190	22.66	23.02	23.14	23.65
830	848.8	251	22.69	23.10	23.15	23.64
	The div	rision fa	actor compared	to the number of	of TX time slot	
Div	vision factor			2 TX time slot		4 TX time slot
			-9.03	-6.02	-4.26	-3.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 347

			Burst avera	age power		
	ted Avg. Pow olerance (dBr		27	27	27	27
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
EDGE	824.2	128	25.69	25.35	25.34	25.31
850	836.6	190	25.76	25.27	25.32	25.21
(MCS5)	848.8	251	25.66	25.43	25.40	25.28
		S	ource-based tim	ne average powe	er	
EDGE	824.2	128	16.66	19.33	21.08	22.30
850	836.6	190	16.73	19.25	21.06	22.20
(MCS5)	848.8	251	16.63	19.41	21.14	22.27
	The div	ision fa	actor compared	to the number of	of TX time slot	
Div	vision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot
	rision factor		-9.03	-6.02	-4.26	-3.01

EUT mode	Frequency (MHz)	СН	Max. Rated Avg. Power + Max.	Burst average power	Source -based time average power
			Tolerance (dBm)	Avg. (dBm)	Avg. (dBm)
00044000	1850.2	512	30.5	29.30	20.27
GSM1900 (GMSK)	1800	661	30.5	29.53	20.50
(Giviory)	1909.8	810	30.5	29.78	20.75
The di	ivision facto	r compared	to the numb	per of TX tir	ne slot
	Divisio	n factor		1 TX ti	me slot
	וטופועום	ii iacioi		-9.	.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 347

-											
	Burst average power										
	ted Avg. Pow olerance (dBı		30.5	27.5	26.5	25					
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP					
EUT mode	Frequency	СН	Avg.	Avg.	Avg.	Avg.					
LOT IIIOGE	(MHz)	GII	(dBm)	(dBm)	(dBm)	(dBm)					
GPRS	1850.2 512				25.73	24.03					
1900	1880	661	29.53	26.35	25.22	23.96					
1900	1909.8	810	29.78	26.52	25.74	24.07					
		S	ource-based tim	ne average power	er						
GPRS	1850.2	512	20.27	20.24	21.47	21.02					
1900	1880	661	20.50	20.33	20.96	20.95					
1900	1909.8	810	20.75	20.50	21.48	21.06					
	The div	ision fa	actor compared	to the number of	of TX time slot						
Div	vision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot					
	vision iacioi		-9.03	-6.02	-4.26	-3.01					

	Burst average power										
	ted Avg. Powe olerance (dBr		25	25	25	25					
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP					
EUT mode	Frequency (MHz)	CH	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)					
EDGE	1850.2	512	24.72	24.86	24.38	24.31					
1900	1880 661		24.75	24.77	24.32	24.09					
(MCS5)	1909.8	810	24.82	24.81	24.45	24.41					
		S	ource-based tim	e average powe	er						
EDGE	1850.2	512	15.69	18.84	20.12	21.30					
1900	1880	661	15.72	18.75	20.06	21.08					
(MCS5)	1909.8	810	15.79	18.79	20.19	21.40					
	The div	ision fa	actor compared	to the number of	of TX time slot						
Div	ision factor			2 TX time slot	3 TX time slot						
	rision factor		-9.03	-6.02	-4.26	-3.01					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 17 of 347

WCDMA Band II / Band IV / Band V - HSDPA / HSUPA conducted power table:

Band	Max. Rated Avg. Power + Rel9		Rel99	HSDPA mode AV(dBm)			HSUPA mode AV(dBm)				HSPA+ mode AV(dBm)						
Ballu	Tolerance (dBm)	AV(dBm)	SUB-1	SUB-2	SUB-3	SUB-4	SUB-1	SUB-2	SUB-3	SUB-4	SUB-5	SUB-1	SUB-2	SUB-3	SUB-4	SUB-5	
WCDMA	9262	24	23.45	22.35	22.33	21.87	21.94	21.41	21.47	21.95	21.52	22.31	21.72	21.28	21.26	21.33	21.33
Band II	9400	24	23.43	22.34	22.29	21.89	21.9	21.36	21.44	21.92	21.50	22.30	21.76	21.34	21.32	21.40	21.34
Dancin	9538	24	23.51	22.39	22.36	21.86	21.98	21.43	21.47	22.01	21.55	22.38	22.09	21.63	21.67	21.71	21.73
WCDMA	1312	24	23.49	22.32	22.29	21.84	21.91	21.45	21.51	21.99	21.56	22.29	21.76	21.32	21.30	21.37	21.37
Band IV	1412	24	23.24	22.21	22.10	21.76	21.77	21.98	21.25	21.73	21.31	22.21	21.57	21.15	21.13	21.21	21.15
Danaiv	1513	24	23.28	22.22	22.13	21.69	21.81	21.50	21.24	21.78	21.32	22.17	21.86	21.40	21.44	21.48	21.50
WCDMA	4132	24.5	24.05	22.98	22.84	22.52	22.57	22.70	22.07	22.55	22.12	22.86	22.32	21.88	21.86	21.93	21.93
WCDMA Band V	4183	24.5	23.87	22.82	22.76	22.34	22.38	22.64	21.88	22.36	21.94	22.81	22.20	21.78	21.76	21.84	21.78
Danu v	4233	24.5	24.11	23.06	22.98	22.57	22.63	22.86	22.07	22.61	22.15	23.01	22.69	22.23	22.27	22.31	22.33

HSDPA

SUB-TEST	βς	β_{d}	β _d (SF)	β_c/β_d	β _{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15	15/15	64	12/15	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

HSUPA

SUB-TEST	βς	β _d	β _d (SF)	β _o /β _d	β _{HS} (Note1)	β _{ec}	β _{ed} (Note 5) (Note 6)	β _{ed} (SF)	β _{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β _{ed} 1: 47/15 β _{ed} 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 18 of 347

LTE FDD Band II / Band IV / Band V / Band VII / Band XII / Band XVII / Band XXX power table:

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1860	18700	23.89	24	0
			0	1880	18900	23.69	24	0
				1900	19100	23.61	24	0
				1860	18700	22.82	24	0
		1 RB	50	1880	18900	22.77	24	0
				1900	19100	22.83	24	0
				1860	18700	23.30	24	0
			99	1880	18900	23.14	24	0
				1900	19100	23.26	24	0
				1860	18700	22.20	23	0-1
	QPSK		0	1880	18900	22.29	23	0-1
				1900	19100	22.28	23	0-1
				1860	18700	22.07	23	0-1
	50	50 RB	25	1880	18900	21.88	23	0-1
			50	1900	19100	21.99	23	0-1
				1860	18700	21.95	23	0-1
				1880	18900	22.13	23	0-1
				1900	19100	22.08	23	0-1
		400	NDD	1860	18700	22.24	23	0-1
		100)RB	1880	18900	22.21	23	0-1
20			1	1900	19100	22.20	23	0-1
			0	1860	18700	22.91 22.90	23	0-1 0-1
			0	1880	18900		23	
				1900	19100	22.93	23 23	0-1 0-1
		1 RB	50	1860	18700	22.16		0-1
		TKD	30	1880 1900	18900 19100	21.99 21.98	23 23	0-1
				1860	18700	22.56	23	0-1
			99	1880	18900	22.31	23	0-1
			33	1900	19100	22.03	23	0-1
				1860	18700	21.28	22	0-1
	16-QAM		0	1880	18900	21.34	22	0-2
	10 30 1111			1900	19100	21.23	22	0-2
				1860	18700	21.01	22	0-2
		50 RB	25	1880	18900	20.98	22	0-2
				1900	19100	21.06	22	0-2
				1860	18700	21.00	22	0-2
			50	1880	18900	21.11	22	0-2
				1900	19100	21.00	22	0-2
				1860	18700	21.17	22	0-2
		100)RB	1880	18900	21.24	22	0-2
				1900	19100	21.22	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 19 of 347

				FDD Band 2					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1857.5	18675	23.48	24	0	
			0	1880	18900	23.57	24	0	
				1902.5	19125	23.54	24	0	
				1857.5	18675	22.77	24	0	
		1 RB	36	1880	18900	22.67	24	0	
				1902.5	19125	22.43	24	0	
				1857.5	18675	22.92	24	0	
			74	1880	18900	23.03	24	0	
				1902.5	19125	22.97	24	0	
				1857.5	18675	21.99	23	0-1	
	QPSK		0	1880	18900	22.15	23	0-1	
				1902.5	19125	21.91	23	0-1	
				1857.5	18675	21.86	23	0-1	
		36 RB	18	1880	18900	22.07	23	0-1	
				1902.5	19125	21.86	23	0-1	
				1857.5	18675	21.79	23		
			37	1880	18900	21.94	23		
				1902.5	19125	21.86	23	0-1	
				1857.5	18675	22.04	23	0-1	
		75	RB	1880	18900	21.99	23	0-1	
15			_	1902.5	19125	21.95	23		
			_	1857.5	18675	22.58	23		
			0	1880	18900	22.69	23	•	
				1902.5	19125	22.96	23		
				1857.5	18675	21.76	23		
		1 RB	36	1880	18900	21.85	23		
				1902.5	19125	22.00	23		
			7.4	1857.5	18675	22.56	23		
			74	1880	18900	21.88	23		
				1902.5	19125	22.37	23		
	16-QAM		0	1857.5	18675	20.90	22		
	16-QAIVI		0	1880	18900	21.00	22		
				1902.5	19125	20.81	22		
		26 DD	10	1857.5	18675	20.97	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-1	
		36 RB	18	1880	18900	21.09	22		
				1902.5	19125	20.76	22		
			27	1857.5	18675	20.87	22		
			37	1880	18900	21.01	22		
				1902.5	19125	20.78	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-	
		75	DD	1857.5	18675	20.91	22		
	75R	מא	1880	18900	20.98	22			
					1902.5	19125	21.01	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

prosecuted to the fullest extent of the law.



Page: 20 of 347

	FDD Band 2												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)					
				1855	18650	22.69	24	0					
			0	1880	18900	23.09	24	0					
				1905	19150	23.03	24	0					
				1855	18650	22.68	24	0					
		1 RB	25	1880	18900	22.68	24	0					
				1905	19150	22.74	24	0					
				1855	18650	22.58	24	0					
			49	1880	18900	22.74	24	0					
				1905	19150	22.70	24	0					
				1855	18650	21.93	23	0-1					
	QPSK		0	1880	18900	21.89	23	0-1					
				1905	19150	21.94	23	0-1					
				1855	18650	21.76	23	0-1					
		25 RB	12	1880	18900	21.86	23	0-1					
				1905	19150	21.72	23	0-1					
				1855	18650	21.75	23	0-1					
			25	1880	18900	21.85	23	0-1					
				1905	19150	21.79	23	0-1					
				1855	18650	21.84	23	0-1					
		50	RB	1880	18900	21.79	23	0-1					
10				1905	19150	21.82	23	0-1					
				1855	18650	22.60	23						
			0	1880	18900	22.37	23	0-1					
				1905	19150	22.52	23	0-1					
				1855	18650	21.95	23	0-1					
		1 RB	25	1880	18900	21.86	23	0-1					
				1905	19150	22.01	23	0-1					
				1855	18650	21.93	23	0-1					
			49	1880	18900	21.92	23						
				1905	19150	21.83	23						
			_	1855	18650	20.97	22	0-2					
	16-QAM		0	1880	18900	20.96	22						
				1905	19150	21.14	22	0-2					
				1855	18650	20.84	22	0-2					
		25 RB	12	1880	18900	20.97	22						
				1905	19150	20.82	22						
				1855	18650	20.67	22						
			25	1880	18900	20.96	22	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1					
				1905	19150	20.87	22						
				1855	18650	20.80	22						
		50	RB	1880	18900	20.83	22						
			1905	19150	20.83	22	0-2						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 347

FDD Band 2											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1852.5	18625	22.59	24	0			
			0	1880	18900	22.83	24	0			
				1907.5	19175	22.62	24	0			
				1852.5	18625	22.47	24	0			
		1 RB	12	1880	18900	22.72	24	0			
				1907.5	19175	22.51	24	0			
				1852.5	18625	22.76	24	0			
			24	1880	18900	22.66	24	0			
				1907.5	19175	22.64	24	0			
				1852.5	18625	21.65	23	0-1			
	QPSK		0	1880	18900	21.86	23	0-1			
				1907.5	19175	21.72	23	0-1			
				1852.5	18625	21.72	23	0-1			
		12 RB	6	1880	18900	21.67	23	0-1			
				1907.5	19175	21.68	23	0-1			
				1852.5	18625	21.82	23	0-1			
			13	1880	18900	21.67	23	0-1			
				1907.5	19175	21.69	23	0-1			
				1852.5	18625	21.67	23	0-1			
		25	RB	1880	18900	21.63	23	0-1			
5				1907.5	19175	21.61	23	0-1			
Ü			_	1852.5	18625	21.61	23	0-1			
			0	1880	18900	22.01	23	0-1			
				1907.5	19175	22.03	23	0-1			
				1852.5	18625	22.06	23	0-1			
		1 RB	12	1880	18900	22.13	23	0-1			
				1907.5	19175	22.22	23	0-1			
				1852.5	18625	22.06	23	0-1			
			24	1880	18900	21.92	23	0-1			
				1907.5	19175	21.45	23	0-1			
				1852.5	18625	20.85	22	0-2			
	16-QAM		0	1880	18900	20.86	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1907.5	19175	20.76	22				
				1852.5	18625	20.78	22				
		12 RB	6	1880	18900	20.87	22				
				1907.5	19175	20.75	22				
				1852.5	18625	20.85	22				
			13	1880	18900	20.83	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1907.5	19175	20.73	22	0-2			
	25			1852.5	18625	20.58	22	0-2			
		25	RB	1880	18900	20.75	22				
			1907.5	19175	20.75	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 22 of 347

FDD Band 2												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1851.5	18615	22.45	24	0				
			0	1880	18900	22.54	24	0				
				1908.5	19185	22.63	24	0				
				1851.5	18615	22.53	24	0				
		1 RB	7	1880	18900	22.64	24	0				
				1908.5	19185	22.76	24	0				
				1851.5	18615	22.39	24	0				
			14	1880	18900	22.49	24	0				
				1908.5	19185	22.65	24	0				
				1851.5	18615	21.62	23	0-1				
	QPSK		0	1880	18900	21.71	23	0-1				
				1908.5	19185	21.74	23	0-1				
				1851.5	18615	21.72	23	0-1				
		8 RB	4	1880	18900	21.85	23	0-1				
				1908.5	19185	21.71	23	0-1				
				1851.5	18615	21.67	23	0-1				
			7	1880	18900	21.72	23	0-1				
				1908.5	19185	21.72	23	0-1				
				1851.5	18615	21.63	23	0-1				
		15	RB	1880	18900	21.77	23	0-1				
3				1908.5	19185	21.66	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1				
Ŭ				1851.5	18615	22.04	23	0-1				
			0	1880	18900	22.05	23	0-1				
				1908.5	19185	22.07	23	0-1				
				1851.5	18615	21.53	23	0-1				
		1 RB	7	1880	18900	22.10	23	0-1				
				1908.5	19185	21.82	23	0-1				
				1851.5	18615	21.64	23	0-1				
			14	1880	18900	21.83	23	0-1				
				1908.5	19185	21.88	23	0-1				
				1851.5	18615	20.82	22	0-2				
	16-QAM		0	1880	18900	20.82	22	0-2				
				1908.5	19185	20.82	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1851.5	18615	20.93	22					
		8 RB	4	1880	18900	20.72	22					
				1908.5	19185	20.94	22					
				1851.5	18615	20.80	22					
			7	1880	18900	20.91	22	0-2				
				1908.5	19185	20.77	22	0-2				
				1851.5	18615	20.71	22	0-2				
	15	RB	1880	18900	20.74	22						
		-	1908.5	19185	20.77	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 23 of 347

FDD Band 2											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1850.7	18607	22.47	24	0			
			0	1880	18900	22.54	24	0			
				1909.3	19193	22.61	24	0			
				1850.7	18607	22.57	24	0			
		1 RB	2	1880	18900	22.62	24	0			
				1909.3	19193	22.66	24	0			
				1850.7	18607	22.45	24	0			
			5	1880	18900	22.52	24	0			
				1909.3	19193	22.57	24	0			
				1850.7	18607	22.53	24	0			
	QPSK		0	1880	18900	22.60	24	0			
				1909.3	19193	22.67	24	0			
				1850.7	18607	22.63	24	0			
		3 RB	2	1880	18900	22.64	24	0			
				1909.3	19193	22.68	24	0			
				1850.7	18607	22.62	24	0			
			3	1880	18900	22.64	24	0			
				1909.3	19193	22.58	24	0			
				1850.7	18607	21.61	23	0-1			
		6	RB	1880	18900	21.74	23	0-1			
1.4				1909.3	19193	21.71	23	0-1			
				1850.7	18607	22.06	23	0-1			
			0	1880	18900	22.20	23	0-1			
				1909.3	19193	21.90	23	0-1			
				1850.7	18607	22.05	23	0-1			
		1 RB	2	1880	18900	21.65	23	0-1			
				1909.3	19193	22.15	23	0-1			
				1850.7	18607	22.07	23	0-1			
			5	1880	18900	21.72	23				
				1909.3	19193	21.51	23	0-1			
				1850.7	18607	21.68	23				
	16-QAM		0	1880	18900	21.75	23	0-1			
				1909.3	19193	21.71	23	0-1			
				1850.7	18607	21.74	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		3 RB	2	1880	18900	21.67	23				
				1909.3	19193	21.73	23				
				1850.7	18607	21.48	23				
			3	1880	18900	21.64	23				
				1909.3	19193	21.70	23	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1850.7	18607	20.76	22				
	61	RB	1880	18900	20.72	22					
						1909.3	19193	20.78	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 24 of 347

	FDD Band 4												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)					
				1720	20050	23.55	24	0					
			0	1732.5	20175	23.33	24	0					
				1745	20300	23.21	24	0					
				1720	20050	22.34	24	0					
		1 RB	50	1732.5	20175	22.14	24	0					
				1745	20300	22.00	24	0					
				1720	20050	22.75	24	0					
			99	1732.5	20175	22.41	24	0					
				1745	20300	22.28	24	0					
				1720	20050	21.90	23	0-1					
	QPSK		0	1732.5	20175	21.88	23	0-1					
				1745	20300	21.74	23	0-1					
				1720	20050	21.51	23	0-1					
		50 RB	25	1732.5	20175	21.37	23	0-1					
				1745	20300	21.32	23	0-1					
				1720	20050	21.65	23	0-1					
			50	1732.5	20175	21.52	23	0-1					
				1745	20300	21.26	23	0-1					
				1720	20050	21.76	23	0-1					
		100	ORB	1732.5	20175	21.61	23	0-1					
20				1745	20300	21.63	23	0-1					
				1720	20050	22.39	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1					
			0	1732.5	20175	22.42	23	0-1					
				1745	20300	22.33	23						
				1720	20050	21.28	23	0-1					
		1 RB	50	1732.5	20175	21.45	23	0-1					
				1745	20300	21.66	23	0-1					
				1720	20050	21.84	23	0-1					
			99	1732.5	20175	22.09	23						
				1745	20300	21.73	23						
			_	1720	20050	20.92	22	0-2					
	16-QAM		0	1732.5	20175	20.78	22						
				1745	20300	20.76	22	0-2					
			l <u>.</u>	1720	20050	20.60	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1					
		50 RB	25	1732.5	20175	20.43	22						
				1745	20300	20.36	22						
				1720	20050	20.58	22						
			50	1732.5	20175	20.63	22	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-					
				1745	20300	20.26	22						
				1720	20050	20.74	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1					
		100	ORB	1732.5	20175	20.64	22						
				1745	20300	20.73	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 347

	FDD Band 4												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)					
				1717.5	20025	22.82	24	0					
			0	1732.5	20175	22.99	24	0					
				1747.5	20325	22.83	24	0					
				1717.5	20025	22.31	24	0					
		1 RB	36	1732.5	20175	22.20	24	0					
				1747.5	20325	22.31	24	0					
				1717.5	20025	22.68	24	0					
			74	1732.5	20175	22.35	24	0					
				1747.5	20325	22.29	24	0					
				1717.5	20025	21.71	23	0-1					
	QPSK		0	1732.5	20175	21.76	23	0-1					
				1747.5	20325	21.55	23	0-1					
				1717.5	20025	21.44	23	0-1					
		36 RB	18	1732.5	20175	21.36	23	0-1					
				1747.5	20325	21.20	23	0-1					
				1717.5	20025	21.51	23	0-1					
			37	1732.5	20175	21.29	23	0-1					
				1747.5	20325	21.27	23	0-1					
				1717.5	20025	21.50	23	0-1					
		75	RB	1732.5	20175	21.56	23	0-1					
15				1747.5	20325	21.37	23	0-1					
				1717.5	20025	22.08	23	0-1					
			0	1732.5	20175	22.18	23	0-1					
				1747.5	20325	22.01	23	0-1					
				1717.5	20025	21.70	23	0-1					
		1 RB	36	1732.5	20175	21.39	23						
				1747.5	20325	21.24	23						
				1717.5	20025	22.13	23						
			74	1732.5	20175	22.07	23						
				1747.5	20325	21.20	23						
				1717.5	20025	20.72	22						
	16-QAM		0	1732.5	20175	20.82	22						
				1747.5	20325	20.54	22						
				1717.5	20025	20.51	22	0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1					
		36 RB	18	1732.5	20175	20.39	22						
				1747.5	20325	20.24	22						
			6-	1717.5	20025	20.45	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-					
			37	1732.5	20175	20.45	22						
				1747.5	20325	20.20	22						
		 -	DD	1717.5	20025	20.56	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-					
		/5	RB	1732.5	20175	20.40	22						
			1747.5	20325	20.34	22	0-2						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 26 of 347

				FDD Band 4							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1715	20000	22.43	24	0			
			0	1732.5	20175	22.50	24	0			
				1750	20350	22.58	24	0			
				1715	20000	22.30	24	0			
		1 RB	25	1732.5	20175	22.12	24	0			
				1750	20350	22.13	24	0			
				1715	20000	22.02	24	0			
			49	1732.5	20175	22.19	24	0			
				1750	20350	22.13	24	0			
				1715	20000	21.61	23	0-1			
	QPSK		0	1732.5	20175	21.38	23	0-1			
				1750	20350	21.28	23	0-1			
				1715	20000	21.55	23	0-1			
		25 RB	12	1732.5	20175	21.35	23	0-1			
				1750	20350	21.17	23	0-1			
				1715	20000	21.36	23	0-1			
			25	1732.5	20175	21.25	23	0-1			
				1750	20350	21.15	23	0-1			
				1715	20000	21.50	23	0-1			
		50	RB	1732.5	20175	21.30	23				
10			1	1750	20350	21.28	23	0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-			
			_	1715	20000	22.17	23				
			0	1732.5	20175	21.83	23				
				1750	20350	21.79	23				
		4 DD	0.5	1715	20000	21.51	23				
		1 RB	25	1732.5	20175	21.10	23				
				1750	20350	21.02	23				
			40	1715	20000	21.51	23				
			49	1732.5	20175	21.64	23				
				1750	20350	21.62	23				
	16-QAM		0	1715	20000	20.59	22 22				
	10-QAW			1732.5 1750	20175 20350	20.39	22				
				1750	20000	20.33	22				
		25 RB	12	1715	20175	20.03	22	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1			
		20110	14	1752.5	20175	20.28	22				
				1730	20000	20.10	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
			25	1732.5	20175	20.33	22				
				1752.5	20350	20.43	22				
			<u> </u>	1730	20000	20.17	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
		50	RB	1732.5	20175	20.26	22				
			-	1750	20350	20.17	22				
				1,00	20000	20.17		` <i>-</i>			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 27 of 347

				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1712.5	19975	22.19	24	0
			0	1732.5	20175	22.29	24	0
				1752.5	20375	22.15	24	0
				1712.5	19975	22.22	24	0
		1 RB	12	1732.5	20175	22.12	24	0
				1752.5	20375	22.17	24	0
				1712.5	19975	22.32	24	0
			24	1732.5	20175	22.04	24	0
				1752.5	20375	22.15	24	0
				1712.5	19975	21.53	23	0-1
	QPSK		0	1732.5	20175	21.28	23	0-1
				1752.5	20375	21.19	23	0-1
				1712.5	19975	21.46	23	0-1
		12 RB	6	1732.5	20175	21.27	23	0-1
				1752.5	20375	21.21	23	0-1
				1712.5	19975	21.41	23	0-1
			13	1732.5	20175	21.26	23	0-1
				1752.5	20375	21.13	23	0-1
				1712.5	19975	21.42	23	0-1
		25	RB	1732.5	20175	21.33	23	0-1
5			_	1752.5	20375	21.12	23	0-1
			_	1712.5	19975	21.74	23	0-1
			0	1732.5	20175	21.18	23	0-1
				1752.5	20375	21.28	23	0-1
				1712.5	19975	21.69	23	0-1
		1 RB	12	1732.5	20175	21.66	23	0-1
				1752.5	20375	21.78	23	0-1
			0.4	1712.5	19975	21.17	23	0-1
			24	1732.5	20175	21.34	23	0-1
				1752.5	20375	21.23	23	0-1
	16 0 14		_	1712.5	19975	20.56	22	0-2
	16-QAM		0	1732.5	20175	20.40	22	0-2
				1752.5	20375	20.31	22	0-2
		12 DD	6	1712.5	19975	20.50	22	0-2
		12 RB	6	1732.5	20175	20.21	22	0-2
				1752.5	20375	20.27	22 22	0-2
			13	1712.5	19975	20.49		0-2
			13	1732.5	20175	20.22	22 22	0-2 0-2
			<u> </u>	1752.5	20375	20.10		
		25	RR	1712.5 1732.5	19975 20175	20.42	22 22	0-2 0-2
		25R	ייי	1752.5	20175	20.21	22	0-2
				1732.5	203/3	20.31	22	U-Z

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 28 of 347

				FDD Band 4								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1711.5	19965	22.33	24	0				
			0	1732.5	20175	22.15	24	0				
				1753.5	20385	22.28	24	0				
				1711.5	19965	22.41	24	0				
		1 RB	7	1732.5	20175	22.29	24	0				
				1753.5	20385	22.21	24	0				
				1711.5	19965	22.23	24	0				
			14	1732.5	20175	22.02	24	0				
				1753.5	20385	22.01	24	0				
				1711.5	19965	21.43	23	0-1				
	QPSK		0	1732.5	20175	21.25	23	0-1				
				1753.5	20385	21.09	23	0-1				
				1711.5	19965	21.58	23	0-1				
		8 RB	4	1732.5	20175	21.24	23	0-1				
				1753.5	20385	21.12	23	0-1				
				1711.5	19965	21.43	23					
			7	1732.5	20175	21.29	23	0-1				
				1753.5	20385	21.07	23	0-1				
				1711.5	19965	21.47	23	0-1				
		15	RB	1732.5	20175	21.34	23	0-1				
3			_	1753.5	20385	21.10	23	0-1 0-1 0-1 0-1				
			_	1711.5	19965	21.95	23					
			0	1732.5	20175	21.18	23					
				1753.5	20385	21.35	23					
			_	1711.5	19965	21.33	23	0-1				
		1 RB	7	1732.5	20175	21.49	23	0-1				
				1753.5	20385	21.58	23	0-1				
			4.4	1711.5	19965	21.70	23	0-1				
			14	1732.5	20175	21.50	23	0-1				
				1753.5	20385	21.00	23	0-1				
	16 OAM		0	1711.5	19965	20.58	22	0-2				
	16-QAM		0	1732.5	20175	20.38	22	0-2				
				1753.5	20385	20.32	22	0-2				
		0 DD	A	1711.5	19965	20.77	22	0-2				
		8 RB	4	1732.5	20175	20.41	22	0-2				
				1753.5	20385	20.07	22 22	0-2				
			7	1711.5	19965	20.52		0-2				
			'	1732.5	20175	20.30	22 22	0-2 0-2				
			<u> </u>	1753.5 1711.5	20385 19965	20.23 20.53	22	0-2				
		15	RR	1711.5	20175	20.53	22	0-2				
		15R	ייי	1753.5	20175	20.31	22	0-2				
				1703.5	20300	20.12	22	U-Z				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 29 of 347

				FDD Band 4					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1710.7	19957	22.08	24	0	
			0	1732.5	20175	22.12	24	0	
				1754.3	20393	22.03	24	0	
				1710.7	19957	22.23	24	0	
		1 RB	2	1732.5	20175	22.26	24	0	
				1754.3	20393	22.02	24	0	
				1710.7	19957	22.15	24	0	
			5	1732.5	20175	22.04	24	0	
				1754.3	20393	22.00	24	0	
				1710.7	19957	22.22	24	0	
	QPSK		0	1732.5	20175	22.25	24	0	
				1754.3	20393	22.05	24	0	
				1710.7	19957	22.25	24	0	
		3 RB	2	1732.5	20175	22.32	24	0	
				1754.3	20393	22.16	24	0	
				1710.7	19957	22.30	24		
			3	1732.5	20175	22.06	24	0	
				1754.3	20393	22.10	24	0	
				1710.7	19957	21.47	23	0-1	
		6	₹В	1732.5	20175	21.24	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
1.4			_	1754.3	20393	21.12	23		
			_	1710.7	19957	21.71	23		
			0	1732.5	20175	21.06	23	•	
				1754.3	20393	21.13	23		
				1710.7	19957	21.45	23		
		1 RB	2	1732.5	20175	21.54	23		
				1754.3	20393	21.55	23		
			_	1710.7	19957	21.82	23		
			5	1732.5	20175	21.61	23		
				1754.3	20393	21.14	23		
	16 OAM		0	1710.7	19957	21.40	23	•	
	16-QAM		0	1732.5	20175	21.25	23		
				1754.3	20393	21.20	23		
		2 DD	2	1710.7	19957	21.34	23		
		3 RB	2	1732.5	20175	21.30	23		
				1754.3	20393 19957	21.16	23 23		
			3	1710.7		21.26		0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1	
			3	1732.5	20175	21.15	23		
			<u> </u>	1754.3 1710.7	20393 19957	21.02 20.50	23 22		
		e.	⊋R	1710.7	20175	20.50	22	0-2	
	6RI	,,,	1752.3	20173	20.02	22	0-2		
				1704.3	20393	20.02	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 30 of 347

FDD Band 5												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				829	20450	23.07	24.5	0				
			0	836.5	20525	23.18	24.5	0				
				844	20600	23.45	24.5	0				
				829	20450	23.26	24.5	0				
		1 RB	25	836.5	20525	23.36	24.5	0				
				844	20600	23.30	24.5	0				
				829	20450	23.19	24.5	0				
			49	836.5	20525	23.13	24.5	0				
				844	20600	23.28	24.5	0				
				829	20450	22.08	23.5	0-1				
	QPSK		0	836.5	20525	22.22	23.5	0-1				
				844	20600	22.31	23.5	0-1				
				829	20450	22.09	23.5	0-1				
		25 RB	12	836.5	20525	22.23	23.5	0-1				
				844	20600	22.38	23.5	0-1				
				829	20450	22.17	23.5	0-1				
			25	836.5	20525	22.20	23.5	0-1				
				844	20600	22.51	23.5	0-1				
				829	20450	22.06	23.5					
		50	RB	836.5	20525	22.25	23.5					
10			_	844	20600	22.31	23.5					
				829	20450	22.37	23.5	0-1				
			0	836.5	20525	22.21	23.5	0-1				
				844	20600	22.49	23.5					
				829	20450	22.13	23.5					
		1 RB	25	836.5	20525	22.49	23.5					
				844	20600	23.06	23.5	0-1				
				829	20450	22.20	23.5	0-1				
			49	836.5	20525	22.36	23.5					
				844	20600	22.79	23.5					
	40.0			829	20450	21.19	22.5					
	16-QAM		0	836.5	20525	21.15	22.5	1				
				844	20600	21.24	22.5					
				829	20450	21.21	22.5	0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-				
		25 RB	12	836.5	20525	21.22	22.5					
				844	20600	21.41	22.5	1				
				829	20450	21.05	22.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			25	836.5	20525	21.17	22.5					
				844	20600	21.40	22.5					
			DD	829	20450	21.12	22.5	0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-				
		50	RB	836.5	20525	21.25	22.5					
				844	20600	21.25	22.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 31 of 347

	FDD Band 5										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				826.5	20425	23.22	24.5	0			
			0	836.5	20525	23.22	24.5	0			
				846.5	20625	23.30	24.5	0			
				826.5	20425	23.35	24.5	0			
		1 RB	12	836.5	20525	23.15	24.5	0			
				846.5	20625	23.27	24.5	0			
				826.5	20425	23.22	24.5	0			
			24	836.5	20525	23.41	24.5	0			
				846.5	20625	23.26	24.5	0			
				826.5	20425	22.19	23.5	0-1			
	QPSK		0	836.5	20525	22.17	23.5	0-1			
		12 RB		846.5	20625	22.36	23.5	0-1			
			6	826.5	20425	22.24	23.5	0-1			
				836.5	20525	22.25	23.5	0-1			
				846.5	20625	22.42	23.5	0-1			
			13	826.5	20425	22.17	23.5	0-1			
				836.5	20525	22.32	23.5	0-1			
				846.5	20625	22.38	23.5	0-1			
				826.5	20425	22.11	23.5	0-1			
		25	RB	836.5	20525	22.33	23.5	0-1			
5				846.5	20625	22.49	23.5	0-1			
Ü		1 RB	0	826.5	20425	22.42	23.5	0-1			
				836.5	20525	21.77	23.5	0-1			
				846.5	20625	22.80	23.5	0-1			
			12	826.5	20425	22.37	23.5	0-1			
				836.5	20525	22.52	23.5	0-1			
				846.5	20625	22.92	23.5	0-1			
			24	826.5	20425	22.54	23.5	0-1			
				836.5	20525	22.74	23.5	0-1			
				846.5	20625	22.92	23.5	0-1			
				826.5	20425	21.14	22.5	0-2			
	16-QAM		0	836.5	20525	21.21	22.5	0-2			
				846.5	20625	21.41	22.5	0-2			
				826.5	20425	21.20	22.5	0-2			
		12 RB	6	836.5	20525	21.34	22.5	0-2			
				846.5	20625	21.31	22.5	0-2			
				826.5	20425	21.10	22.5	0-2			
			13	836.5	20525	21.21	22.5	0-2			
				846.5	20625	21.37	22.5	0-2			
				826.5	20425	21.18	22.5	0-2			
		25	RB	836.5	20525	21.36	22.5	0-2			
				846.5	20625	21.44	22.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

f (886-2) 2298-0488

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. No.134,Wu Kung Roa 支股份有限公司 t (886-2) 2299-3279



Page: 32 of 347

				FDD Band 5				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				825.5	20415	23.17	24.5	0
			0	836.5	20525	23.18	24.5	0
				847.5	20635	23.61	24.5	0
				825.5	20415	23.38	24.5	0
		1 RB	7	836.5	20525	23.36	24.5	0
				847.5	20635	23.40	24.5	0
				825.5	20415	23.20	24.5	0
			14	836.5	20525	23.39	24.5	0
				847.5	20635	23.39	24.5	0
				825.5	20415	22.14	23.5	0-1
	QPSK		0	836.5	20525	22.20	23.5	0-1
				847.5	20635	22.37	23.5	0-1
		8 RB	4	825.5	20415	22.03	23.5	0-1
				836.5	20525	22.29	23.5	0-1
				847.5	20635	22.36	23.5	0-1
				825.5	20415	22.11	23.5	0-1
			7	836.5	20525	22.37	23.5	0-1
				847.5	20635	22.39	23.5	0-1
				825.5	20415	22.17	23.5	0-1
		15	RB	836.5	20525	22.19	23.5	0-1
3				847.5	20635	22.39	23.5	0-1
		1 RB	0	825.5	20415	22.29	23.5	0-1
				836.5	20525	22.25	23.5	0-1
				847.5	20635	22.75	23.5	0-1
			7	825.5	20415	22.95	23.5	0-1
				836.5	20525	22.92	23.5	0-1
				847.5	20635	22.53	23.5	0-1
				825.5	20415	22.55	23.5	0-1
			14	836.5	20525	22.07	23.5	0-1
				847.5	20635	22.50	23.5	0-1
	40.0414			825.5	20415	21.20	22.5	0-2
	16-QAM		0	836.5	20525	21.28	22.5	0-2
				847.5	20635	21.25	22.5	0-2
		0.00		825.5	20415	21.09	22.5	0-2
		8 RB	4	836.5	20525	21.32	22.5	0-2
				847.5	20635	21.50	22.5	0-2
			_	825.5	20415	21.10	22.5	0-2
			7	836.5	20525	21.33	22.5	0-2
				847.5	20635	21.37	22.5	0-2
		4-	DD	825.5	20415	21.35	22.5	0-2
		15	RB	836.5	20525	21.36	22.5	0-2
				847.5	20635	21.47	22.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 33 of 347

	FDD Band 5									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				824.7	20407	23.23	24.5	0		
			0	836.5	20525	23.43	24.5	0		
				848.3	20643	23.46	24.5	0		
				824.7	20407	23.12	24.5	0		
		1 RB	2	836.5	20525	23.15	24.5	0		
				848.3	20643	23.39	24.5	0		
				824.7	20407	23.30	24.5	0		
			5	836.5	20525	23.27	24.5	0		
				848.3	20643	23.19	24.5	0		
				824.7	20407	23.12	24.5	0		
	QPSK		0	836.5	20525	23.37	24.5	0		
				848.3	20643	23.50	24.5	0		
			3	824.7	20407	23.28	24.5	0		
		3 RB		836.5	20525	23.42	24.5	0		
				848.3	20643	23.28	24.5	0		
				824.7	20407	23.20	24.5	0		
				836.5	20525	23.36	24.5	0		
				848.3	20643	23.45	24.5	0		
				824.7	20407	22.03	23.5	0-1		
		6	RB	836.5	20525	22.29	23.5	0-1		
1.4				848.3	20643	22.32	23.5	0-1		
		1 RB	0	824.7	20407	22.52	23.5	0-1		
				836.5	20525	22.78	23.5	0-1		
				848.3	20643	22.90	23.5	0-1		
			2	824.7	20407	22.75	23.5	0-1		
				836.5	20525	22.54	23.5	0-1		
				848.3	20643	22.98	23.5	0-1		
				824.7	20407	21.98	23.5	0-1		
			5	836.5	20525	22.38	23.5	0-1		
				848.3	20643	22.20	23.5	0-1		
			_	824.7	20407	22.25	23.5	0-1		
	16-QAM		0	836.5	20525	22.34	23.5	0-1		
				848.3	20643	22.42	23.5	0-1		
				824.7	20407	22.31	23.5	0-1		
		3 RB	2	836.5	20525	22.41	23.5	0-1		
				848.3	20643	22.40	23.5	0-1		
				824.7	20407	22.20	23.5	0-1		
			3	836.5	20525	22.28	23.5	0-1		
				848.3	20643	22.41	23.5	0-1		
			20	824.7	20407	20.96	22.5	0-2		
		6RB		836.5	20525	21.22	22.5	0-2		
				848.3	20643	21.27	22.5	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 34 of 347

	FDD Band 7									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				2510	20850	22.67	23	0		
			0	2535	21100	22.62	23	0		
				2560	21350	22.52	23	0		
				2510	20850	22.12	23	0		
		1 RB	50	2535	21100	21.77	23	0		
				2560	21350	21.77	23	0		
				2510	20850	22.61	23	0		
			99	2535	21100	22.42	23	0		
				2560	21350	22.24	23	0		
				2510	20850	21.56	22	0-1		
	QPSK		0	2535	21100	21.37	22	0-1		
				2560	21350	21.16	22	0-1		
			25	2510	20850	21.37	22	0-1		
		50 RB		2535	21100	21.16	22	0-1		
				2560	21350	20.83	22	0-1		
			50	2510	20850	21.43	22	0-1		
				2535	21100	21.24	22	0-1		
				2560	21350	20.84	22	0-1		
				2510	20850	21.52	22	0-1		
		100	ORB	2535	21100	21.39	22	0-1		
20				2560	21350	21.07	22	0-1		
		1 RB	0	2510	20850	21.92	22	0-1		
				2535	21100	21.75	22	0-1		
				2560	21350	21.66	22	0-1		
			50	2510	20850	21.24	22	0-1		
				2535	21100	21.08	22	0-1		
				2560	21350	20.53	22	0-1		
				2510	20850	22.00	22	0-1		
			99	2535	21100	21.57	22	0-1		
			<u> </u>	2560	21350	21.56	22	0-1		
	40.0			2510	20850	20.63	21	0-2		
	16-QAM		0	2535	21100	20.30	21	0-2		
				2560	21350	19.90	21	0-2		
				2510	20850	20.43	21	0-2		
		50 RB	25	2535	21100	20.25	21	0-2		
				2560	21350	19.87	21	0-2		
				2510	20850	20.39	21	0-2		
			50	2535	21100	20.14	21	0-2		
				2560	21350	19.85	21	0-2		
		4.00		2510	20850	20.33	21	0-2		
		100)RB	2535	21100	20.30	21	0-2		
					2560	21350	20.00	21	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 35 of 347

				FDD Band 7					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2507.5	20825	22.64	23	0	
			0	2535	21100	22.51	23	0	
				2562.5	21375	22.39	23	0	
				2507.5	20825	22.05	23	0	
		1 RB	36	2535	21100	21.96	23	0	
				2562.5	21375	21.76	23	0	
				2507.5	20825	22.56	23	0	
			74	2535	21100	22.37	23	0	
				2562.5	21375	21.88	23	0	
				2507.5	20825	21.56	22	0-1	
	QPSK		0	2535	21100	21.48	22	0-1	
				2562.5	21375	20.94	22	0-1	
		36 RB	18	2507.5	20825	21.33	22	0-1	
				2535	21100	21.19	22	0-1	
				2562.5	21375	20.84	22	0-1	
			37	2507.5	20825	21.25	22	0-1	
				2535	21100	21.24	22	0-1	
				2562.5	21375	20.91	22	0-1	
				2507.5	20825	21.48	22	0-1	
		751	RB	2535	21100	21.22	22	0-1	
15				2562.5	21375	20.88	22	0-1	
		1 RB	0	2507.5	20825	21.96	22	0-1	
				2535	21100	21.81	22	0-1	
				2562.5	21375	21.28	22	0-1	
			36	2507.5	20825	21.80	22	0-1	
				2535	21100	21.21	22	0-1	
				2562.5	21375	21.10	22	0-1	
				2507.5	20825	21.84	22	0-1	
			74	2535	21100	21.60	22	0-1	
				2562.5	21375	21.13	22	0-1	
	40.044			2507.5	20825	20.52	21	0-2	
	16-QAM		0	2535	21100	20.24	21	0-2	
				2562.5	21375	19.97	21	0-2	
		00.55	4.5	2507.5	20825	20.34	21	0-2	
		36 RB	18	2535	21100	20.15	21	0-2	
				2562.5	21375	19.85	21	0-2	
				2507.5	20825	20.18	21	0-2	
			37	2535	21100	20.16	21	0-2	
				2562.5	21375	19.87	21	0-2	
			DD	2507.5	20825	20.43	21	0-2	
		75	RB	2535	21100	20.30	21	0-2	
					2562.5	21375	19.88	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 36 of 347

				FDD Band 7					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2505	20800	22.32	23	0	
			0	2535	21100	22.26	23	0	
				2565	21400	21.88	23	0	
				2505	20800	22.06	23	0	
		1 RB	25	2535	21100	21.86	23	0	
				2565	21400	21.86	23	0	
				2505	20800	22.19	23	0	
			49	2535	21100	22.00	23	0	
				2565	21400	21.83	23	0	
				2505	20800	21.29	22	0-1	
	QPSK		0	2535	21100	21.13	22	0-1	
				2565	21400	20.85	22	0-1	
		25 RB	12	2505	20800	21.26	22	0-1	
				2535	21100	20.99	22	0-1	
				2565	21400	20.79	22	0-1	
			25	2505	20800	21.32	22	0-1	
				2535	21100	21.02	22	0-1	
				2565	21400	20.82	22	0-1	
				2505	20800	21.34	22	0-1	
		50	RB	2535	21100	21.12	22	0-1	
10				2565	21400	20.87	22	0-1	
. •		1 RB	0	2505	20800	21.95	22	0-1	
				2535	21100	21.46	22	0-1	
				2565	21400	21.29	22	0-1	
			25	2505	20800	21.38	22	0-1	
				2535	21100	20.89	22	0-1	
				2565	21400	20.99	22	0-1	
				2505	20800	21.53	22	0-1	
			49	2535	21100	20.96	22	0-1	
				2565	21400	20.97	22	0-1	
	40.0			2505	20800	20.35	21	0-2	
	16-QAM		0	2535	21100	20.22	21	0-2	
				2565	21400	20.05	21	0-2	
				2505	20800	20.19	21	0-2	
		25 RB	12	2535	21100	20.04	21	0-2	
				2565	21400	19.78	21	0-2	
				2505	20800	20.25	21	0-2	
			25	2535	21100	20.02	21	0-2	
				2565	21400	19.87	21	0-2	
			DD	2505	20800	20.33	21	0-2	
		50	RB	2535	21100	20.01	21	0-2	
					2565	21400	19.87	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 37 of 347

				FDD Band 7				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2502.5	20775	22.16	23	0
			0	2535	21100	21.96	23	0
				2567.5	21425	21.82	23	0
				2502.5	20775	22.12	23	0
		1 RB	12	2535	21100	21.99	23	0
				2567.5	21425	21.75	23	0
				2502.5	20775	22.17	23	0
			24	2535	21100	21.85	23	0
				2567.5	21425	21.70	23	0
				2502.5	20775	21.28	22	0-1
	QPSK		0	2535	21100	21.00	22	0-1
				2567.5	21425	20.83	22	0-1
				2502.5	20775	21.21	22	0-1
		12 RB	6	2535	21100	20.96	22	0-1
				2567.5	21425	20.85	22	0-1
				2502.5	20775	21.20	22	0-1
			13	2535	21100	20.95	22	0-1
				2567.5	21425	20.77	22	0-1
				2502.5	20775	21.22	22	0-1
		25	RB	2535	21100	20.89	22	0-1
5			_	2567.5	21425	20.80	22	0-1
				2502.5	20775	21.71	22	0-1
			0	2535	21100	20.81	22	0-1
				2567.5	21425	21.08	22	0-1
				2502.5	20775	21.33	22	0-1
		1 RB	12	2535	21100	21.03	22	0-1
				2567.5	21425	21.02	22	0-1
				2502.5	20775	21.33	22	0-1
			24	2535	21100	21.32	22	0-1
				2567.5	21425	21.07	22	0-1
	16 0 14			2502.5	20775	20.26	21	0-2
	16-QAM		0	2535	21100	20.04	21	0-2
				2567.5	21425	19.86	21	0-2
		40.00		2502.5	20775	20.32	21	0-2
		12 RB	6	2535	21100	19.89	21	0-2
				2567.5	21425	19.87	21	0-2
			10	2502.5	20775	20.31	21	0-2
			13	2535	21100	20.03	21	0-2
			<u> </u>	2567.5	21425	19.80	21	0-2
		0.5	DD	2502.5	20775	20.29	21	0-2
		25	RB	2535	21100	19.98	21	0-2
				2567.5	21425	19.96	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 347

				FDD Band 12				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				704	23060	23.61	24.5	0
			0	707.5	23095	23.47	24.5	0
				711	23130	23.61	24.5	0
				704	23060	23.70	24.5	0
		1 RB	25	707.5	23095	23.65	24.5	0
				711	23130	23.74	24.5	0
				704	23060	23.87	24.5	0
			49	707.5	23095	23.89	24.5	0
				711	23130	24.00	24.5	0
				704	23060	22.80	23.5	0-1
	QPSK		0	707.5	23095	22.91	23.5	0-1
				711	23130	22.87	23.5	0-1
				704	23060	22.89	23.5	0-1
		25 RB	12	707.5	23095	22.98	23.5	0-1
				711	23130	23.02	23.5	0-1
			25	704	23060	22.88	23.5	0-1
				707.5	23095	23.00	23.5	0-1
				711	23130	23.12	23.5	0-1
				704	23060	22.94	23.5	0-1
		50	RB	707.5	23095	22.91	23.5	0-1
10			T	711	23130	23.00	23.5	0-1
				704	23060	23.24	23.5	0-1
			0	707.5	23095	23.05	23.5	0-1
				711	23130	23.08	23.5	0-1
		4 DD	0.5	704	23060	23.52	23.5	0-1
		1 RB	25	707.5	23095	22.96	23.5	0-1
				711	23130	22.92	23.5	0-1
			49	704 707.5	23060 23095	23.31 23.47	23.5 23.5	0-1 0-1
			43	707.5	23130	23.47	23.5	0-1
				711	23060	21.79	23.5	0-1
	16-QAM		0	704	23095	•		0-2
	IO QAIVI			707.5	23130	21.75 21.83	22.5 22.5	0-2
				711	23060	21.85	22.5	0-2
		25 RB	12	707.5	23095	21.83	22.5	0-2
		20110	'-	707.3	23130	22.01	22.5	0-2
				711	23060	21.89	22.5	0-2
			25	707.5	23095	21.94	22.5	0-2
				711	23130	22.11	22.5	0-2
					23060	21.95	22.5	0-2
		50	50RB		23095	21.98	22.5	0-2
				707.5 711	23130	21.98	22.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 39 of 347

				FDD Band 12				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				701.5	23035	23.59	24.5	0
			0	707.5	23095	23.61	24.5	0
				713.5	23155	23.70	24.5	0
				701.5	23035	23.65	24.5	0
		1 RB	12	707.5	23095	23.69	24.5	0
				713.5	23155	23.94	24.5	0
				701.5	23035	23.78	24.5	0
			24	707.5	23095	23.83	24.5	0
				713.5	23155	24.00	24.5	0
				701.5	23035	22.95	23.5	0-1
	QPSK		0	707.5	23095	22.72	23.5	0-1
				713.5	23155	23.01	23.5	0-1
				701.5	23035	22.97	23.5	0-1
		12 RB	6	707.5	23095	22.87	23.5	0-1
				713.5	23155	23.12	23.5	0-1
				701.5	23035	22.77	23.5	0-1
			13	707.5	23095	22.95	23.5	0-1
				713.5	23155	23.11	23.5	0-1
				701.5	23035	22.72	23.5	0-1
		25	RB	707.5	23095	22.85	23.5	0-1
5			_	713.5	23155	23.09	23.5	0-1
				701.5	23035	23.15	23.5	0-1
			0	707.5	23095	22.74	23.5	0-1
				713.5	23155	22.87	23.5	0-1
				701.5	23035	23.32	23.5	0-1
		1 RB	12	707.5	23095	23.32	23.5	0-1
				713.5	23155	22.97	23.5	0-1
				701.5	23035	22.67	23.5	0-1
			24	707.5	23095	23.05	23.5	0-1
				713.5	23155	23.50	23.5	0-1
	16 0 4 4			701.5	23035	21.87	22.5	0-2
	16-QAM		0	707.5	23095	21.72	22.5	0-2
				713.5	23155	21.93	22.5	0-2
		40.00		701.5	23035	21.84	22.5	0-2
		12 RB	6	707.5	23095	21.73	22.5	0-2
				713.5	23155	22.15	22.5	0-2
			10	701.5	23035	21.79	22.5	0-2
			13	707.5	23095	21.94	22.5	0-2
			<u> </u>	713.5	23155	22.09	22.5	0-2
		0.5	DD	701.5	23035	21.84	22.5	0-2
		25	RB	707.5	23095	21.84	22.5	0-2
				713.5	23155	22.02	22.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 40 of 347

	FDD Band 12										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				700.5	23025	23.75	24.5	0			
			0	707.5	23095	23.78	24.5	0			
				714.5	23165	23.84	24.5	0			
				700.5	23025	23.93	24.5	0			
		1 RB	7	707.5	23095	23.97	24.5	0			
				714.5	23165	23.88	24.5	0			
				700.5	23025	23.80	24.5	0			
			14	707.5	23095	23.75	24.5	0			
				714.5	23165	23.81	24.5	0			
				700.5	23025	22.90	23.5	0-1			
	QPSK		0	707.5	23095	22.87	23.5	0-1			
				714.5	23165	23.00	23.5	0-1			
				700.5	23025	22.84	23.5	0-1			
		8 RB	4	707.5	23095	22.88	23.5	0-1			
				714.5	23165	23.10	23.5	0-1			
				700.5	23025	22.85	23.5	0-1			
			7	707.5	23095	22.86	23.5	0-1			
				714.5	23165	23.02	23.5	0-1			
				700.5	23025	22.88	23.5	0-1			
		15	RB	707.5	23095	22.91	23.5	0-1			
3				714.5	23165	23.14	23.5	0-1			
				700.5	23025	23.35	23.5	0-1			
			0	707.5	23095	22.89	23.5	0-1			
				714.5	23165	23.07	23.5	0-1			
				700.5	23025	23.47	23.5	0-1			
		1 RB	7	707.5	23095	23.11	23.5	0-1			
				714.5	23165	23.17	23.5	0-1			
				700.5	23025	22.96	23.5	0-1			
			14	707.5	23095	23.25	23.5	0-1			
				714.5	23165	23.44	23.5	0-1			
				700.5	23025	22.00	22.5	0-2			
	16-QAM		0	707.5	23095	21.93	22.5	0-2			
				714.5	23165	22.10	22.5	0-2			
				700.5	23025	21.82	22.5	0-2			
		8 RB	4	707.5	23095	21.98	22.5	0-2			
				714.5	23165	22.08	22.5	0-2			
				700.5	23025	21.66	22.5	0-2			
			7	707.5	23095	21.77	22.5	0-2			
				714.5	23165	21.94	22.5	0-2			
					23025	21.83	22.5	0-2			
		15	RB	707.5	23095	21.80	22.5	0-2			
			10112		23165	22.36	22.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 41 of 347

				FDD Band 12				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				699.7	23017	23.68	24.5	0
			0	707.5	23095	23.66	24.5	0
				715.3	23173	23.74	24.5	0
				699.7	23017	23.77	24.5	0
		1 RB	2	707.5	23095	23.80	24.5	0
				715.3	23173	23.99	24.5	0
				699.7	23017	23.75	24.5	0
			5	707.5	23095	23.74	24.5	0
				715.3	23173	23.83	24.5	0
				699.7	23017	23.91	24.5	0
	QPSK		0	707.5	23095	23.84	24.5	0
				715.3	23173	24.03	24.5	0
				699.7	23017	23.42	24.5	0
		3 RB	2	707.5	23095	23.47	24.5	0
				715.3	23173	23.46	24.5	0
				699.7	23017	23.48	24.5	0
			3	707.5	23095	23.47	24.5	0
				715.3	23173	23.41	24.5	0
				699.7	23017	22.89	23.5	0-1
		6	RB	707.5	23095	22.57	23.5	0-1
1.4			_	715.3	23173	22.99	23.5	0-1
				699.7	23017	23.10	23.5	0-1
			0	707.5	23095	22.81	23.5	0-1
				715.3	23173	22.96	23.5	0-1
				699.7	23017	23.31	23.5	0-1
		1 RB	2	707.5	23095	23.19	23.5	0-1
				715.3	23173	23.35	23.5	0-1
			_	699.7	23017	22.77	23.5	0-1
			5	707.5	23095	23.31	23.5	0-1
				715.3	23173	23.37	23.5	0-1
	16.044			699.7	23017	22.38	23.5	0-1
	16-QAM		0	707.5	23095	22.16	23.5	0-1
				715.3	23173	22.46	23.5	0-1
		0.00		699.7	23017	22.47	23.5	0-1
		3 RB	2	707.5	23095	22.45	23.5	0-1
				715.3	23173	22.43	23.5	0-1
				699.7	23017	22.47	23.5	0-1
			3	707.5	23095	22.42	23.5	0-1
			<u> </u>	715.3	23173	22.45	23.5	0-1
		0.5	סס	699.7	23017	21.93	22.5	0-2
		61	RB	707.5	23095	21.96	22.5	0-2
				715.3	23173	22.04	22.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 347

	FDD Band 17										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				709	23780	23.70	24.5	0			
			0	710	23790	23.58	24.5	0			
				711	23800	23.68	24.5	0			
				709	23780	23.87	24.5	0			
		1 RB	25	710	23790	23.93	24.5	0			
				711	23800	23.95	24.5	0			
				709	23780	23.81	24.5	0			
			49	710	23790	24.00	24.5	0			
				711	23800	24.04	24.5	0			
				709	23780	22.79	23.5	0-1			
	QPSK		0	710	23790	22.98	23.5	0-1			
				711	23800	22.97	23.5	0-1			
				709	23780	22.91	23.5	0-1			
		25 RB	12	710	23790	23.01	23.5	0-1			
				711	23800	23.01	23.5	0-1			
				709	23780	22.89	23.5	0-1			
			25	710	23790	23.05	23.5	0-1			
				711	23800	23.10	23.5	0-1			
				709	23780	23.04	23.5	0-1			
		50	RB	710	23790	23.04	23.5	0-1			
10			_	711	23800	23.05	23.5	0-1			
				709	23780	23.17	23.5	0-1			
			0	710	23790	23.03	23.5	0-1			
				711	23800	22.67	23.5	0-1			
				709	23780	23.28	23.5	0-1			
		1 RB	25	710	23790	23.22	23.5	0-1			
				711	23800	23.43	23.5	0-1			
				709	23780	23.04	23.5	0-1			
			49	710	23790	23.13	23.5	0-1			
				711	23800	23.50	23.5	0-1			
	40.0444			709	23780	21.73	22.5	0-2			
	16-QAM		0	710	23790	21.99	22.5	0-2			
				711	23800	21.66	22.5	0-2			
		05.55	4.0	709	23780	21.95	22.5	0-2			
		25 RB	12	710	23790	22.11	22.5	0-2			
				711	23800	21.89	22.5	0-2			
			مر ا	709	23780	21.87	22.5	0-2			
			25	710	23790	22.11	22.5	0-2			
				711	23800	22.09	22.5	0-2			
			DD	709	23780	22.02	22.5	0-2			
		50	RB	710	23790	22.08	22.5	0-2			
				711	23800	21.88	22.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 347

				FDD Band 17				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				706.5	23755	23.61	24.5	0
			0	710	23790	23.74	24.5	0
				713.5	23825	23.87	24.5	0
				706.5	23755	23.73	24.5	0
		1 RB	12	710	23790	23.66	24.5	0
				713.5	23825	23.79	24.5	0
				706.5	23755	23.85	24.5	0
			24	710	23790	24.11	24.5	0
				713.5	23825	24.09	24.5	0
				706.5	23755	22.73	23.5	0-1
	QPSK		0	710	23790	22.97	23.5	0-1
				713.5	23825	22.95	23.5	0-1
				706.5	23755	22.73	23.5	0-1
		12 RB	6	710	23790	23.05	23.5	0-1
				713.5	23825	23.20	23.5	0-1
				706.5	23755	22.78	23.5	0-1
			13	710	23790	22.97	23.5	0-1
				713.5	23825	23.09	23.5	0-1
				706.5	23755	22.64	23.5	0-1
		25	RB	710	23790	23.00	23.5	0-1
5			_	713.5	23825	22.97	23.5	0-1
				706.5	23755	22.88	23.5	0-1
			0	710	23790	23.04	23.5	0-1
				713.5	23825	22.95	23.5	0-1
				706.5	23755	23.34	23.5	0-1
		1 RB	12	710	23790	23.49	23.5	0-1
				713.5	23825	23.47	23.5	0-1
				706.5	23755	22.84	23.5	0-1
			24	710	23790	23.33	23.5	0-1
				713.5	23825	23.50	23.5	0-1
	16 0 14			706.5	23755	21.77	22.5	0-2
	16-QAM		0	710	23790	22.07	22.5	0-2
				713.5	23825	22.06	22.5	0-2
		40.00		706.5	23755	21.76	22.5	0-2
		12 RB	6	710	23790	21.99	22.5	0-2
				713.5	23825	22.00	22.5	0-2
			10	706.5	23755	21.79	22.5	0-2
			13	710	23790	21.94	22.5	0-2
			<u> </u>	713.5	23825	22.06	22.5	0-2
		0.5	DD	706.5	23755	21.81	22.5	0-2
		25	RB	710	23790	22.09	22.5	0-2
				713.5	23825	21.99	22.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 44 of 347

				FDD Band 30				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	2310	27710	22.57	23.5	0
		1 RB QPSK	25	2310	27710	22.41	23.5	0
			49	2310	27710	22.37	23.5	0
	QPSK		0	2310	27710	21.59	22.5	0-1
		25 RB	12	2310	27710	21.60	22.5	0-1
			25	2310	27710	21.91	22.5	0-1
10		50	RB	2310	27710	21.53	22.5	0-1
10			0	2310	27710	21.76	22.5	0-1
		1 RB	25	2310	27710	21.63	22.5	0-1
			49	2310	27710	21.82	22.5	0-1
	16-QAM		0	2310	27710	20.36	21.5	0-2
		25 RB	12	2310	27710	20.39	21.5	0-2
			25	2310	27710	20.73	21.5	0-2
		50	RB	2310	27710	20.62	21.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 347

				FDD Band 30				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2307.5	27685	22.57	23.5	0
			0	2310	27710	22.45	23.5	0
				2312.5	27735	22.29	23.5	0
				2307.5	27685	22.48	23.5	0
		1 RB	12	2310	27710	22.28	23.5	0
				2312.5	27735	21.94	23.5	0
				2307.5	27685	22.35	23.5	0
			24	2310	27710	21.96	23.5	0
				2312.5	27735	21.57	23.5	0
				2307.5	27685	21.35	22.5	0-1
	QPSK		0	2310	27710	21.61	22.5	0-1
				2312.5	27735	21.49	22.5	0-1
				2307.5	27685	21.85	22.5	0-1
		12 RB	6	2310	27710	21.56	22.5	0-1
				2312.5	27735	21.78	22.5	0-1
				2307.5	27685	21.69	22.5	0-1
			13	2310	27710	21.50	22.5	0-1
				2312.5	27735	21.52	22.5	0-1
				2307.5	27685	21.74	22.5	0-1
		25	RB	2310	27710	21.45	22.5	0-1
5				2312.5	27735	21.24	22.5	0-1
				2307.5	27685	21.86	22.5	0-1
			0	2310	27710	21.15	22.5	0-1
				2312.5	27735	21.86	22.5	0-1
				2307.5	27685	21.63	22.5	0-1
		1 RB	12	2310	27710	22.11	22.5	0-1
				2312.5	27735	21.27	22.5	0-1
				2307.5	27685	21.73	22.5	0-1
			24	2310	27710	21.40	22.5	0-1
				2312.5	27735	21.28	22.5	0-1
				2307.5	27685	20.57	21.5	0-2
	16-QAM		0	2310	27710	20.43	21.5	0-2
				2312.5	27735	20.57	21.5	0-2
			_	2307.5	27685	20.46	21.5	0-2
		12 RB	6	2310	27710	20.79	21.5	0-2
				2312.5	27735	20.50	21.5	0-2
			40	2307.5	27685	20.41	21.5	0-2
			13	2310	27710	20.70	21.5	0-2
				2312.5	27735	20.46	21.5	0-2
			DD	2307.5	27685	20.42	21.5	0-2
		25	RB	2310	27710	20.26	21.5	0-2
				2312.5	27735	20.65	21.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 46 of 347

LTE FDD Band II / Band IV / Band VII / Band XII / Band XVII CA power table:

				Tv	wo Compon	ent Carr	ier Maxin	num Cond	ucted Pow	/er				
				PCC	<u> </u>				SCC				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	Tx.Power (DL CA active)	Tx.Power (DL CA inactive)
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	23.75	23.89
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B17	10	5790	740	23.85	23.89
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B29	10	9715	722.5	23.61	23.89
LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B7	20	3100	2655	22.51	23.55
LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B12	10	5095	737.5	22.42	23.55
LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B17	10	5790	740	22.51	23.55
LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B29	10	9715	722.5	22.39	23.55
LTE B7	20	20850	2510	QPSK	1	0	3100	2655	LTE B4	20	2050	2120	22.39	22.67
LTE B12	10	23130	711	QPSK	1	49	5095	737.5	LTE B2	20	700	1940	23.31	24.00
LTE B12	10	23130	711	QPSK	1	49	5095	737.5	LTE B4	20	2050	2120	23.29	24.00
LTE B17	10	23800	711	QPSK	1	49	5790	740	LTE B2	20	700	1940	23.38	24.04
LTE B17	10	23800	711	QPSK	1	49	5790	740	LTE B4	20	2050	2120	23.23	24.04

Note.

- 1. 2DL CA combination (inter-band): B2+B29, B4+B29, B2+B17, B4+B17, B2+B12, B4+B12, B4+B7
- 2. Uplink maximum output power is measured with downlink carrier aggregation active, only for the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 47 of 347

WLAN802.11 a/b/g/n(20M/40M)/ac(20M/40M/80M) conducted power table:

Antenna	SI	SO	MIMO
Band	Chain 0	Chain 1	Chain0+1
WLAN802.11b	V	V	-
WLAN802.11g	V	V	_
WLAN802.11n(20M)	V	V	V
WLAN802.11n(40M)	V	V	V
WLAN802.11a	V	V	_
WLAN802.11n(20M) 5G	V	V	V
WLAN802.11n(40M) 5G	V	V	V
WLAN802.11ac(20M) 5G	V	V	V
WLAN802.11ac(40M) 5G	V	V	V
WLAN802.11ac(80M) 5G	V	V	V

Main (CH0)

	802.11 b	Max. Rated Avg.	Average conducted output power (dBm)
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
CIT	(MHz)	Tolerance (dbin)	1
1	2412	17	16.09
6	2437	17	16.15
11	2462	17	16.04

802.11 g		Max. Rated Avg.	Average conducted output power (dBm)
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
CIT	(MHz)		6
1	2412	17	16.63
6	2437	17	16.60
11	2462	17	16.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 48 of 347

Main (CH0)

111001111	mani (Grio)			
80	2.11 n(20M)	Max. Rated Avg.	Average conducted output power (dBm)	
СП	Frequency	Power + Max.	Data Rate (Mbps)	
СП	CH (MHz) Tolerance (dBm)	6.5		
1	2412	14	13.31	
6	2437	14	13.25	
11	2462	14	13.33	

802.11 n(40M)		Max. Rated Avg.	Average conducted output power (dBm)
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
СП	(MHz)		13.5
3	2422	14	13.44
6	2437	14	13.12
9	2452	14	13.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 49 of 347

Main (CH0)

Walli (C			
802.11 a 5.2/5.3/5.6/5.8G		Max. Rated Avg.	Average conducted output power(dBm)
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
OIT	(MHz)		6
36	5180	14	13.86
40	5200	14	13.75
44	5220	14	13.35
48	5240	14	13.24
52	5260	14	13.92
56	5280	14	13.87
60	5300	14	13.83
64	5320	14	13.80
100	5500	13	12.98
120	5600	13	12.78
140	5700	13	12.56
149	5745	13	12.71
157	5785	13	12.72
165	5825	13	12.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 347

Main (CH0)

waiii (Ciio)			
802.11 n(20M) 5.2/5.3/5.6/5.8G		Max. Rated Avg.	Average conducted output power(dBm)
5.2/3	0.3/5.6/5.8G	Power + Max.	power (dBin)
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)
OIT	(MHz)		6.5
36	5180	14	13.24
40	5200	14	13.04
44	5220	14	13.88
48	5240	14	13.76
52	5260	14	13.71
56	5280	14	13.68
60	5300	14	13.67
64	5320	14	13.60
100	5500	13	12.78
120	5600	13	12.52
140	5700	13	12.21
149	5745	13	12.43
157	5785	13	12.42
165	5825	13	12.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 51 of 347

Main (CH0)

<u> </u>					
802.11 n(40M)			Average conducted output		
5.2/5	5.3/5.6/5.8G	Max. Rated Avg. Power + Max. Tolerance (dBm)	power(dBm)		
СН	Frequency		Data Rate (Mbps)		
СП	(MHz)		13.5		
38	5190	14	13.87		
46	5230	14	13.75		
54	5270	14	13.16		
62	5310	14	13.12		
102	5510	12	11.72		
110	5550	12	11.63		
118	5590	12	11.56		
126	5630	12	11.48		
134	5670	12	11.43		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 52 of 347

Main (CH0)

802.	11 ac(20M)	Max. Rated Avg. Power + Max.	Average conducted output
5.2/5	5.3/5.6/5.8G		power(dBm)
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)
OH	(MHz)		6.5
36	5180	14	13.25
40	5200	14	13.04
44	5220	14	13.83
48	5240	14	13.76
52	5260	14	13.68
56	5280	14	13.66
60	5300	14	13.67
64	5320	14	13.57
100	5500	13	12.45
120	5600	13	12.31
140	5700	13	12.34
144	5720	13	12.85
149	5745	13	12.78
157	5785	13	12.81
165	5825	13	12.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 53 of 347

Main (CH0)

11 ac(40M)	Max. Rated Avg.	Average conducted output		
5.3/5.6/5.8G		power(dBm)		
Frequency	Tolerance (dBm)	Data Rate (Mbps)		
(MHz)		13.5		
5190	14	13.60		
5230	14	13.28		
5270	14	13.15		
5310	14	13.16		
5510	12	11.82		
5550	12	11.77		
5590	12	11.75		
5630	12	11.76		
5670	12	11.63		
5710	12	11.52		
5755	12	11.44		
5795	12	11.41		
	11 ac(40M) 5.3/5.6/5.8G Frequency (MHz) 5190 5230 5270 5310 5510 5550 5590 5630 5670 5710 5755	11 ac(40M) 5.3/5.6/5.8G Frequency (MHz) 5190 14 5230 14 5270 14 5310 14 5510 12 5550 12 5630 12 5670 12 5710 12 5755 12		

802.11 ac(80M)			Average conducted output
5.2/5	5.3/5.6/5.8G	Max. Rated Avg.	power(dBm)
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
СП	(MHz)		29.3
42	5210	13	12.15
58	5290	13	12.35
106	5530	11	10.88
122	5610	13	12.72
138	5690	13	12.39
155	5775	10	9.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 347

Aux (CH1)

Man 10	tax (OTT)		
	802.11 b	Max. Rated Avg.	Average conducted output power (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)		1
1	2412	17	16.47
6	2437	17	16.51
11	2462	17	16.60

802.11 g		Max. Rated Avg.	Average conducted output power (dBm)
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
СП	(MHz)		6
1	2412	17	16.88
6	2437	17	16.99
11	2462	17	16.97

802.11 n(20M)		Max. Rated Avg.	Average conducted output power (dBm)
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
СП	(MHz)		6.5
1	2412	14	13.72
6	2437	14	13.88
11	2462	14	13.93

802.11 n(40M)		Max. Rated Avg.	Average conducted output power (dBm)	
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)	
СП	(MHz)	Tolerance (dbin)	13.5	
3	2422	14	13.58	
6	2437	14	13.66	
9	2452	14	13.82	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 347

Auv (CH1)

Aux (Ci	71)		
	302.11 a 5.3/5.6/5.8G	Max. Rated Avg.	Average conducted output power(dBm)
СН	Frequency (MHz)	Power + Max. Tolerance (dBm)	Data Rate (Mbps)
36	5180	14	13.91
40	5200	14	13.58
44	5220	14	13.26
48	5240	14	13.90
52	5260	14	13.58
56	5280	14	13.23
60	5300	14	13.97
64	5320	14	13.79
100	5500	13	12.62
120	5600 13 12.43	12.43	
140	5700	13	12.76
149	5745	13	12.73
157	5785	13	12.37
165	5825	13	12.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 56 of 347

Aux (CH1)

802	.11 n(20M)		Average conducted output	
5.2/5	5.3/5.6/5.8G	Max. Rated Avg. Power + Max. Tolerance (dBm)	power(dBm)	
СН	Frequency (MHz)		Data Rate (Mbps)	
011			6.5	
36	5180	14	13.68	
40	5200	14	13.32	
44	5220	14	13.91	
48	5240	14 14 14 14 14	13.55	
52	5260		13.23	
56	5280		13.93	
60	5300		13.68	
64	5320		13.41	
100	5500 13 12.33	12.33		
120	5600	13	12.65	
140	5700	13 13 13	12.26	
149	5745		12.54	
157	5785		12.30	
165	5825	13	12.64	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 57 of 347

Auv (CH1)

Aux (CH1)				
802.11 n(40M) 5.2/5.3/5.6/5.8G		Max. Rated Avg.	Average conducted output power(dBm)	
		Power + Max.	powor(dBiii)	
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)	
011	(MHz)		13.5	
38	5190	14	13.83	
46	5230	14	13.13	
54	5270	14	13.46	
62	5310	14	13.98	
102	5510	12	11.28	
110	5550	12	11.21	
118	5590	12	11.15	
126	5630	12	11.52	
134	5670	12	11.34	
151	5755	12	11.88	
159	5795	12	11.92	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 58 of 347

Aux (CH1)

Aux (Ci	AUX (CH1)				
802.	11 ac(20M)		Average conducted output power(dBm)		
5.2/5	5.3/5.6/5.8G	Max. Rated Avg. Power + Max. Tolerance (dBm)			
СН	Frequency		Data Rate (Mbps)		
OII	(MHz)		6.5		
36	5180	14	13.55		
40	5200	14	13.21		
44	5220	14	13.78		
48	5240	5240 14 13.43			
52	5260	14 14	13.12		
56	5280		14 13.84	13.84	
60	5300	14	13.60		
64	5320	14	13.33		
100	5500	5500 13 12.42			
120	5600 13 12.33		12.33		
140	5700 13	13 13 13 13	12.31		
144	5720		5720 13 12.35	12.35	
149	5745		12.89		
157	5785		12.84		
165	5825	13	12.67		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 59 of 347

Auv (CH1)

Aux (Ci	Aux (CH1)				
	11 ac(40M)	M. D.O. I.A.	Average conducted output		
5.2/5.3/5.6/5.8G		Max. Rated Avg. Power + Max.	power(dBm)		
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)		
011	(MHz)		13.5		
38	5190	14	13.80		
46	5230	14	13.09		
54	5270	14	13.42		
62	5310	14	13.97		
102	5510	12	11.35		
110	5550	12	11.32		
118	5590	90 12 11.37	11.37		
126	5630	12	11.84		
134	5670	12	11.87		
142	5710	12	11.81		
151	5755	12	11.74		
159 5795 12		12	11.68		

802.11 ac(80M)			Average conducted output	
5.2/5	5.3/5.6/5.8G	Max. Rated Avg. Power + Max.	power(dBm)	
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)	
СП	(MHz)	, i	29.3	
42	5210	13	12.76	
58	5290	13	12.67	
106	5530	11	10.94	
122	5610	13	12.92	
138	5690	13	12.83	
155	5775	10	9.82	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 60 of 347

Bluetooth conducted power table:

Frequency	Data Rate Max. tune-up	Average		
(MHz)	Dala Kale	power	dBm	mW
2402	1	4	0.41	1.099
2441	1	4	2.05	1.603
2480	1	4	0.88	1.225
2402	2	4	-3.12	0.488
2441	2	4	-1.63	0.687
2480	2	4	-3.08	0.492
2402	3	4	-3.15	0.484
2441	3	4	-1.82	0.658
2480	3	4	-2.83	0.521

Frequency	BT4.0 Average	
(MHz)	dBm	mW
2402	-3.22	0.476
2442	-2.57	0.553
2480	-3.31	0.467

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 61 of 347

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

- The EUT is controlled by using a Radio Communication Tester (Antrisu MT8820C), and the communication between the EUT and the tester is established by air link.
- 2. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- Testing head SAR at lowest, middle and highest channel for all bands with Left Tilt /Left Cheek/Right Tilt/Right Cheek conditions.
- Testing body-worn SAR for GSM850/1900 by separating the EUT and the phantom 10mm. Body-worn SAR for WCDMA/LTE/WLAN is covered by hotspot SAR since the position of body-worn overlap the hotspot position and the test separation distance of hotspot is the same with that of body-worn.
- 6. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.
- 7. Testing hotspot mode SAR by separating the EUT and the phantom **10mm** distance.
 - #. The SAR testing for portable devices with wireless router capability is refered as test guidance of KDB 941225D06v02r01 (SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 62 of 347

#. The following procedures are applicable when the overall device length and width are ≥9 cm x 5 cm respectively. A test separation of 10 mm is required. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25 mm from that surface or edge, for the data modes, wireless technologies and frequency bands supporting hotspot mode.

Test configurations of WWAN (except LTE B7/30):

- (1) Front side
- (2) Back side
- (3) Bottom side.
- (4) Right side.

Test configurations of WWAN (LTE B7/30):

- (1) Front side
- (2) Back side
- (3) Bottom side.
- (4) left side.

Test configurations of WLAN 2.4GHz Main:

- (1) Front side
- (2) Back side
- (3) Top side.
- (4) Left side

Test configurations of WLAN 2.4GHz Aux:

- (1) Front side
- (2) Back side
- (3) Top side.
- (4) Right side
- 8. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. Since the highest reported hotspot SAR for WWAN/WLAN 2.4GHz is less than 1.2, 10-g extremity SAR is not required for them.
- The SAR test of GPRS was performed on the maximum sourced-based time-averaged power.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 63 of 347

 The SAR measurement is not required for HSDPA/HSPA/HSPA+ since its maximum output power is less than ¼ dB higher than RMC without HSDPA/HSPA/HSPA+.

- 11. LTE modes test according to KDB 941225D05v02r05.
 - a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
 - Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
 - When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
 b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
 - The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
 - c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
 - For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.
 - Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. Per Section 5.2.4, Higher order modulations
 - For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
 - e. Per Section 5.3, other channel bandwidth standalone SAR test requirements

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 64 of 347

• For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

802.11b DSSS SAR Test Requirements:

- 12. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 13. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 802.11g/n OFDM SAR Test Exclusion Requirements:
- 14. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

- 15. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- 16. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

www.tw.sas.com



Page: 65 of 347

- 17. For WLAN Main/Aux antennas, 5.2n(40M)/5.3n(40M)/5.6a/ac(80)/5.8a are chosen to be the initial test configurations.
- 18. For the right head of WLAN Main, since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is > 1.2 W/kg, SAR is required for subsequent test configurations.
- 19. For the right head of WLAN Main, 5.2ac(40)/a/n(20) & 5.3ac(40)/a/n(20) & 5.6n(20) are chosen to be the subsequent test configurations.
- 20. The device supports a maximum of 2 carriers in the downlink. All uplink communications are identical to the Release 8 specifications. Uplink maximum output power is measured with downlink carrier aggregation active, only for the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive. The downlink PCC channel should be paired with the uplink channel according to normal configurations, as if there is no carrier aggregation. For inter-band CA, the SCC should be near the middle of its transmission band. SAR measurement for LTE with DL CA active is not required since LTE uplink power with DL CA active is not more than 1/4 dB higher than the maximum power measured when DL CA inactive.
- 21. BT and WLAN Main use the same antenna path and Bluetooth may transmit simultaneously with WLAN Aux.
- 22. According to KDB447498D01v05r02, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is \leq 100 MHz.
- 23. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (\sim 10% from the 1-g SAR limit)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 66 of 347

24. According to KDB447498D01v06 – The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by: [(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-q SAR. SAR evaluation is not required.

11111/1 [11(0:12/1] = 0.010	, r g 0,, 0,	front/back sides			
Mode	Maximum power (dBm)	Maximum power(mW)	test separation distance (mm)	Exclusion threshold	Require SAR testing?
вт	4	2.512	10	0.396	NO

- 25. Based on KDB248227D01, 1-g SAR thresholds are specified in the procedures for SAR test reduction and exclusion, should be multiplied by 2.5 when 10-g extremity SAR is considered (WLAN 5GHz).
- 26. The device doesn't support VoLTE, so the head SAR measurement is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 67 of 347

1.6 Positioning Procedure

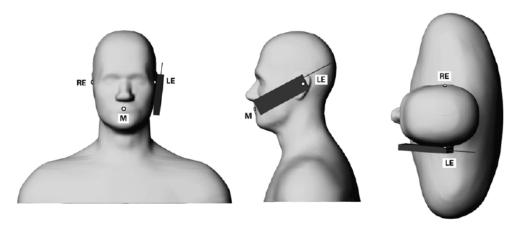

Phone position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

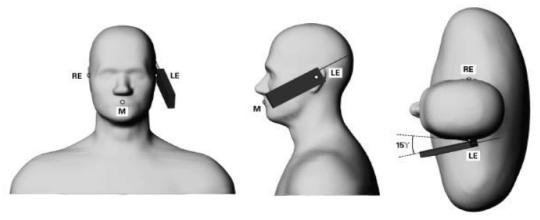

Phone position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

Cheek/Touch Position:

The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 68 of 347

1.7 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- 3. The generation of a high-resolution mesh within the measured volume.
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid.
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 69 of 347

placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 70 of 347

1.8 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.8.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

Whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.

www.tw.sas.com



Page: 71 of 347

thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- 2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- 3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 72 of 347

1.8.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- 1. The setup must enable accurate determination of the incident power.
- 2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- 3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- (1) N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- (2) K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- (3) K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 73 of 347

1.9 The SAR Measurement System

A block diagram of the SAR measurement system is given in Fig. a. This SAR measurement system uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). Model EX3DV4 field probes are used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

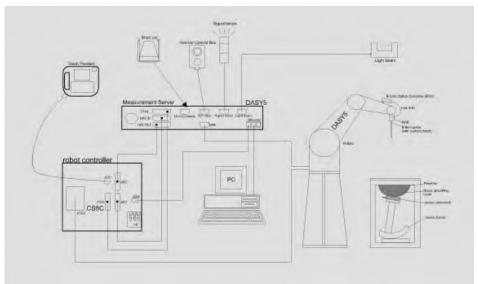


Fig. a A block diagram of the SAR measurement system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 74 of 347

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows7
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes. 12.
- Validation dipole kits allowing to validate the proper functioning of the system. 13.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 75 of 347

1.10 System Components

EX3DV4 E-Field Probe

Symmetrical design with triangular core	
Built-in shielding against static charges	
PEEK enclosure material (resistant to	
organic solvents, e.g., DGBE)	
Basic Broad Band Calibration in air	1
Conversion Factors (CF) for	
HSL750/835/1750/1900/2300/2450/2600/	
5200/5300/5600/5800 MHz Additional CF	
for other liquids and frequencies upon	
request	
10 MHz to > 6 GHz, Linearity: ± 0.6 dB	
± 0.3 dB in HSL (rotation around probe axis))
± 0.5 dB in tissue material (rotation normal t	o probe axis)
10 μW/g to > 100 mW/g	
Linearity: \pm 0.2 dB (noise: typically < 1 μ W/g	1)
Tip diameter: 2.5 mm	
High precision dosimetric measurements in	any exposure scenario
(e.g., very strong gradient fields). Only prob	e which enables
compliance testing for frequencies up to 6 G	GHz with precision of
better 30%.	
	Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) Basic Broad Band Calibration in air Conversion Factors (CF) for HSL750/835/1750/1900/2300/2450/2600/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request 10 MHz to > 6 GHz, Linearity: ± 0.6 dB ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g Tip diameter: 2.5 mm High precision dosimetric measurements in (e.g., very strong gradient fields). Only probe compliance testing for frequencies up to 6 G

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 76 of 347

SAM PHANTOM V4.0C

SAMI I HANT	7111 4 4.00							
Construction:	The shell corresponds to the spec	ifications of the Specific						
	Anthropomorphic Mannequin (SAI	M) phantom defined in IEEE 1528						
	and IEC 62209.							
	It enables the dosimetric evaluation of left and right hand phone							
	usage as well as body mounted us	sage at the flat phantom region. A						
	cover prevents evaporation of the	liquid. Reference markings on the						
	phantom allow the complete setup	o of all predefined phantom						
	positions and measurement grids	by manually teaching three points						
	with the robot.							
Shell	2 ± 0.2 mm							
Thickness:		The state of						
Filling	Approx. 25 liters							
Volume:								
Dimensions:	Height: 850 mm;							
	Length: 1000 mm;							
	Width: 500 mm							
1								

DEVICE HOLDER

Construction	In combination with the Twin SAM Phantom
	V4.0/V4.0C or Twin SAM, the Mounting
	Device (made from POM) enables the
	rotation of the mounted transmitter in
	spherical coordinates, whereby the rotation
	point is the ear opening. The devices can
	be easily and accurately positioned
	according to IEC, IEEE, CENELEC, FCC or
	other specifications. The device holder can
	be locked at different phantom locations
	(left head, right head, flat phantom).



Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 77 of 347

1.11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% (according to KDB865664D01v01r03) from the target SAR values.

These tests were done at 750/835/1750/1900/2300/2450/2600/5200/5300

/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the ambient temperature of the laboratory was 21.7°C, the relative humidity was 62% and the liquid depth above the ear reference points was above 15 cm (≤3G) or 10 cm (>3G) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

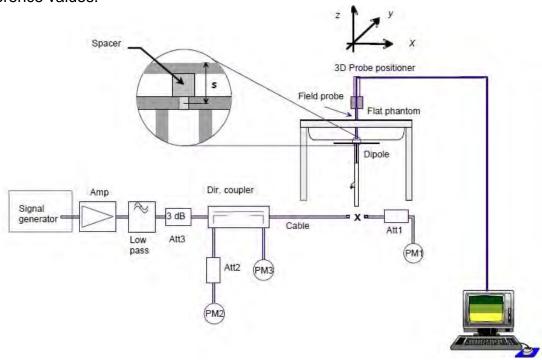


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 78 of 347

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date	
D750V3	1015	750	Body	8.52	2.09	8.36	-1.88%	May. 04, 2016	
D835V2	4d063	835	Head	9.11	2.35	9.4	3.18%	May. 08, 2016	
D035V2	40003	000	Body	9.26	2.4	9.6	3.67%	May. 03, 2016	
D1750V2	1008	1750	Head	36.6	9.34	37.36	2.08%	May. 07, 2016	
D1730V2	1008	1750	Body	37.4	9.30	37.2	-0.53%	Apr. 28, 2016	
D1900V2	5d027	1900	Head	38.7	10	40	3.36%	May. 02, 2016	
D1900V2			1900	Body	39.7	9.53	38.12	-3.98%	Apr. 27, 2016
D2300V2	1023	2300	Body	48.3	11.70	46.8	-3.11%	Apr. 30, 2016	
D2450V2	727	2450	Head	51	13.2	52.8	3.53%	May. 09, 2016	
D2430 V Z	121	2430	Body	49.6	13.2	52.8	6.45%	May. 09, 2016	
D2600V2	1005	2600	Body	53.9	13.8	55.2	2.41%	Apr. 29, 2016	
		5200	Head	77	7.59	75.9	-1.43%	May. 10, 2016	
		3200	Body	71.9	7.59	75.9	5.56%	May. 05, 2016	
		5300	Head	79.9	7.9	79	-1.13%	May. 11, 2016	
D5GHzV2	1023	5500	Body	75.1	7.8	78	3.86%	May. 05, 2016	
D3G112V2	1023	5600	Head	82.6	8.43	84.3	2.06%	May. 12, 2016	
		3000	Body	78.3	8.25	82.5	5.36%	May. 06, 2016	
		5900	Head	77.3	7.51	75.1	-2.85%	May. 13, 2016	
	58	5800		Body	75.3	7.87	78.7	4.52%	May. 06, 2016

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 79 of 347

1.12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was at least 15 cm (≤3G) or 10 cm (>3G) during all tests. (Appendix Fig. 2)

Tissue Type	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Measurement Date
	824.2	41.556	0.899	40.938	0.898	1.49%	0.13%	
	826.6	41.545	0.899	40.912	0.917	1.52%	-2.01%	
	835.0	41.500	0.900	40.894	0.919	1.46%	-2.11%	May. 08, 2016
	836.6	41.500	0.902	40.865	0.923	1.53%	-2.36%	Way. 00, 2010
	846.6	41.500	0.912	40.859	0.930	1.54%	-1.97%	
	848.8	41.500	0.915	40.857	0.933	1.55%	-1.96%	
	1712.4	40.138	1.349	39.332	1.356	2.01%	-0.51%	
	1732.4	40.107	1.361	39.321	1.368	1.96%	-0.49%	May. 07, 2016
	1750.0	40.100	1.370	39.277	1.377	2.05%	-0.51%	Iviay. 07, 2016
	1752.6	40.075	1.373	39.265	1.379	2.02%	-0.50%	
	1850.2	40.000	1.400	39.124	1.414	2.19%	-1.03%	
	1852.4	40.000	1.400	39.088	1.415	2.28%	-1.05%	
Head	1880.0	40.000	1.400	39.020	1.418	2.45%	-1.28%	May. 02, 2016
	1907.6	40.000	1.400	38.900	1.422	2.75%	-1.55%	
	1909.8	40.000	1.400	38.896	1.423	2.76%	-1.63%	
	2412.0	39.268	1.766	38.232	1.843	2.64%	-4.35%	
	2437.0	39.223	1.788	38.142	1.871	2.76%	-4.62%	May. 09, 2016
	2450.0	39.200	1.800	38.097	1.884	2.81%	-4.67%	Iviay. 09, 2010
	2462.0	39.185	1.813	38.041	1.898	2.92%	-4.68%	
	5180.0	36.009	4.635	36.486	4.622	-1.33%	0.27%	
	5190.0	35.997	4.645	36.433	4.635	-1.21%	0.21%	
	5200.0	35.986	4.655	36.445	4.645	-1.28%	0.21%	May. 10, 2016
	5220.0	35.963	4.676	36.361	4.669	-1.11%	0.14%	iviay. 10, 2016
	5230.0	35.951	4.686	36.342	4.689	-1.09%	-0.07%	
	5240.0	35.940	4.696	36.325	4.702	-1.07%	-0.13%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 80 of 347

Tissue Type	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Measurement Date	
	5260.0	35.917	4.717	36.264	4.717	-0.97%	-0.01%		
	5270.0	35.906	4.727	36.200	4.733	-0.82%	-0.13%		
	5280.0	35.894	4.737	36.137	4.749	-0.68%	-0.25%	May. 11, 2016	
	5300.0	35.871	4.758	36.145	4.768	-0.76%	-0.22%		
	5310.0	35.860	4.768	36.106	4.788	-0.69%	-0.42%		
	5500.0	35.643	4.963	35.592	5.025	0.14%	-1.26%		
Head	5600.0	35.529	5.065	35.276	5.154	0.71%	-1.76%		
Heau	5610.0	35.517	5.075	35.257	5.159	0.73%	-1.65%	May. 12, 2016	
	5690.0	35.426	5.157	35.018	5.262	1.15%	-2.03%		
	5700.0	35.414	5.168	34.961	5.279	1.28%	-2.16%		
	5745.0	35.363	5.214	34.855	5.333	1.44%	-2.29%		
	5785.0	35.317	5.255	34.731	5.377	1.66%	-2.33%	May 13 2016	
	5800.0	35.300	5.270	34.700	5.398	1.70%	-2.43%	May. 13, 2016	
	5825.0	35.271	5.296	34.633	5.424	1.81%	-2.42%		

Tissue Type	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Measurement Date
	704.0	55.710	0.960	56.95	0.925	-2.23%	3.62%	
	707.5	55.697	0.960	56.999	0.929	-2.34%	3.24%	
	709.0	55.691	0.960	56.94	0.934	-2.24%	2.73%	May. 04, 2016
	710.0	55.687	0.960	56.926	0.932	-2.22%	2.94%	Iviay. 04, 2016
	711.0	55.683	0.960	56.929	0.934	-2.24%	2.74%	
	750.0	55.531	0.963	56.475	0.976	-1.70%	-1.31%	
	824.2	55.242	0.969	55.856	1.006	-1.11%	-3.80%	
Body	826.6	55.233	0.969	55.817	1.008	-1.06%	-3.99%	
	829.0	55.223	0.970	55.779	1.013	-1.01%	-4.48%	
	835.0	55.200	0.970	55.704	1.017	-0.91%	-4.85%	
	836.5	55.195	0.972	55.735	1.018	-0.98%	-4.75%	May. 03, 2016
	836.6	55.195	0.972	55.733	1.018	-0.97%	-4.74%	
	844.0	55.172	0.981	55.712	1.027	-0.98%	-4.68%	
	846.6	55.164	0.984	55.653	1.03	-0.89%	-4.65%	
	848.8	55.158	0.987	55.633	1.032	-0.86%	-4.56%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 81 of 347

Tissue Type	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Measurement Date
	1712.4	53.531	1.465	54.263	1.404	-1.37%	4.14%	
	1720.0	53.511	1.469	54.257	1.413	-1.40%	3.84%	
	1732.4	53.478	1.477	54.206	1.425	-1.36%	3.54%	
	1732.5	53.478	1.477	54.204	1.425	-1.36%	3.54%	Apr. 28, 2016
	1745.0	53.445	1.485	54.192	1.432	-1.40%	3.59%	
	1750.0	53.432	1.488	54.169	1.438	-1.38%	3.39%	
	1752.6	53.425	1.490	54.131	1.44	-1.32%	3.36%	
	1850.2	53.300	1.520	53.858	1.526	-1.05%	-0.39%	
	1852.4	53.300	1.520	53.862	1.528	-1.05%	-0.53%	
	1860.0	53.300	1.520	53.813	1.532	-0.96%	-0.79%	
	1880.0	53.300	1.520	53.783	1.551	-0.91%	-2.04%	Apr. 27, 2016
	1900.0	53.300	1.520	53.728	1.559	-0.80%	-2.57%	
	1907.6	53.300	1.520	53.633	1.572	-0.62%	-3.42%	
	1909.8	53.300	1.520	53.683	1.577	-0.72%	-3.75%	
	2300.0	52.900	1.807	52.505	1.848	0.75%	-2.29%	Apr. 30, 2016
	2310.0	52.887	1.816	52.476	1.861	0.78%	-2.47%	Apr. 30, 2010
	2437.0	52.717	1.938	52.859	1.984	-0.27%	-2.40%	
	2441.0	52.712	1.941	52.823	1.989	-0.21%	-2.45%	May. 09, 2016
Body	2450.0	52.700	1.950	52.82	2.003	-0.23%	-2.72%	Iviay. 09, 2016
	2462.0	52.685	1.967	52.777	2.021	-0.18%	-2.74%	
	2510.0	52.624	2.035	52.002	2.123	1.18%	-4.32%	
	2535.0	52.592	2.071	51.92	2.156	1.28%	-4.13%	Apr. 29, 2016
	2560.0	52.560	2.106	51.839	2.189	1.37%	-3.94%	Apr. 29, 2016
	2600.0	52.509	2.163	51.705	2.24	1.53%	-3.57%	
	5190.0	49.028	5.288	47.987	5.447	2.12%	-3.01%	May. 05, 2016
	5200.0	49.014	5.299	47.922	5.459	2.23%	-3.01%	Iviay. 05, 2016
	5270.0	48.919	5.381	47.698	5.564	2.50%	-3.40%	
	5300.0	48.879	5.416	47.578	5.609	2.66%	-3.56%	May. 05, 2016
	5310.0	48.865	5.428	47.554	5.623	2.68%	-3.60%	
	5500.0	48.607	5.650	46.91	5.864	3.49%	-3.79%	
	5600.0	48.471	5.766	46.572	6.008	3.92%	-4.19%	
	5610.0	48.458	5.778	46.519	6.029	4.00%	-4.34%	May. 06, 2016
	5690.0	48.349	5.872	46.33	6.029	4.18%	-2.68%	
	5700.0	48.336	5.883	46.301	6.058	4.21%	-2.97%	
	5745.0	48.275	5.936	46.141	6.209	4.42%	-4.60%	
	5800.0	48.200	6.000	46.155	6.145	4.24%	-2.42%	May. 06, 2016
	5825.0	48.166	6.029	45.885	6.233	4.74%	-3.38%	

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 82 of 347

The composition of the tissue simulating liquid:

The composition of the tissue simulating liquid.									
				Ingre	dient			Tatal	
Frequency (MHz)		DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount	
750	Body	1	631.68 g	11.72 g	1.2 g		600 g	1.0L(Kg)	
050	Head	-	532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)	
850	Body	_	631.68 g	11.72 g	1.2 g	_	600 g	1.0L(Kg)	
4==0	Head	444.52 g	552.42 g	3.06 g	-	_	_	1.0L(Kg)	
1750	Body	300.67 g	716.56 g	4.0 g	_	_	_	1.0L(Kg)	
1000	Head	444.52 g	552.42 g	3.06 g	ı	_	_	1.0L(Kg)	
1900	Body	300.67 g	716.56 g	4.0 g	ı	_	_	1.0L(Kg)	
2300	Body	301.7ml	698.3ml	_	-	_	_	1.0L(Kg)	
0450	Head	550ml	450ml	_				1.0L(Kg)	
2450	Body	301.7ml	698.3ml	_	_	_	_	1.0L(Kg)	
2600	Body	301.7ml	698.3ml	_	_	_	_	1.0L(Kg)	

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for tissue simulating liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 83 of 347

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

www.tw.sas.com



Page: 84 of 347

Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .6)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 85 of 347

2. Summary of Results

GSM 850 MHz

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	1	SAR over g /kg) Reported	Plot page
	Re Cheek	-	128	824.2	33.50	31.62	154.17%	0.203	0.313	-
	Re Cheek	-	190	836.6	33.50	31.69	151.71%	0.237	0.360	164
GSM850	Re Cheek	-	251	848.8	33.50	31.72	150.66%	0.201	0.303	-
(Head)	Re Tilt	-	251	848.8	33.50	31.72	150.66%	0.126	0.190	-
	Le Cheek	-	251	848.8	33.50	31.72	150.66%	0.161	0.243	-
	Le Tilt	-	251	848.8	33.50	31.72	150.66%	0.099	0.149	-
	Front side	10	128	824.2	33.50	31.62	154.17%	0.313	0.483	-
GSM850	Back side	10	190	836.6	33.50	31.69	151.71%	0.369	0.560	165
(Body-Worn)	Back side	10	251	848.8	33.50	31.72	150.66%	0.322	0.485	-
	Back side	10	251	848.8	33.50	31.72	150.66%	0.280	0.422	-
	Front side	10	128	824.2	27.50	26.59	123.31%	0.340	0.419	-
	Front side	10	190	836.6	27.50	26.66	121.34%	0.416	0.505	-
GPRS850	Front side	10	251	848.8	27.50	26.65	121.62%	0.505	0.614	166
(Hotspot) (1Dn4UP)	Back side	10	190	836.6	27.50	26.66	121.34%	0.371	0.450	-
	Bottom side	10	190	836.6	27.50	26.66	121.34%	0.152	0.184	-
	Right side	10	190	836.6	27.50	26.66	121.34%	0.256	0.311	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 86 of 347

GSM 1900 MHz

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	1	SAR over g /kg) Reported	Plot page
	Re Cheek	-	512	1850.2	30.50	29.30	131.83%	0.284	0.374	-
	Re Cheek	-	661	1880	30.50	29.53	125.03%	0.297	0.371	-
GSM1900	Re Cheek	-	810	1909.8	30.50	29.78	118.03%	0.336	0.397	167
(Head)	Re Tilt	-	810	1909.8	30.50	29.78	118.03%	0.074	0.087	-
	Le Cheek	-	810	1909.8	30.50	29.78	118.03%	0.169	0.199	-
	Le Tilt	-	810	1909.8	30.50	29.78	118.03%	0.088	0.104	-
	Front side	10	810	1909.8	30.50	29.78	118.03%	0.442	0.522	-
GSM1900	Back side	10	512	1850.2	30.50	29.30	131.83%	0.457	0.602	-
(Body-Worn)	Back side	10	661	1880	30.50	29.53	125.03%	0.469	0.586	-
	Back side	10	810	1909.8	30.50	29.78	118.03%	0.482	0.569	168
	Front side	10	810	1909.8	26.50	25.74	119.12%	0.482	0.574	-
GPRS1900	Back side	10	512	1850.2	26.50	25.73	119.40%	0.414	0.494	-
(Hotspot)	Back side	10	661	1880	26.50	25.22	134.28%	0.419	0.563	-
(1Dn3UP)	Back side	10	810	1909.8	26.50	25.74	119.12%	0.582	0.693	169
	Bottom side	10	810	1909.8	26.50	25.74	119.12%	0.257	0.306	-
	Right side	10	810	1909.8	26.50	25.74	119.12%	0.201	0.239	-

WCDMA Band II

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling		g ˈkg)	Plot page
	DE Charle		0000	4050.4	24	(dBm)	440 500/	Measured		
	RE Cheek	-	9262	1852.4	24	23.45	113.50%	0.600	0.681	-
	RE Cheek	-	9400	1880	24	23.43	114.02%	0.590	0.673	-
R99	RE Cheek	-	9538	1907.6	24	23.51	111.94%	0.626	0.701	170
(Head)	RE Tilt	-	9538	1907.6	24	23.51	111.94%	0.147	0.165	-
	LE Cheek	-	9538	1907.6	24	23.51	111.94%	0.304	0.340	-
	LE Tilt	-	9538	1907.6	24	23.51	111.94%	0.167	0.187	-
	Front side	10	9262	1852.4	24	23.45	113.50%	0.792	0.899	-
	Front side	10	9400	1880	24	23.43	114.02%	0.779	0.888	-
	Front side	10	9538	1907.6	24	23.51	111.94%	0.799	0.894	-
	Back side	10	9262	1852.4	24	23.45	113.50%	0.836	0.949	-
Hotspot	Back side	10	9400	1880	24	23.43	114.02%	0.913	1.041	-
	Back side	10	9538	1907.6	24	23.51	111.94%	0.925	1.035	171
	Back side*	10	9538	1907.6	24	23.51	111.94%	0.875	0.980	-
	Bottom side	10	9538	1907.6	24	23.51	111.94%	0.428	0.479	-
	Right side	10	9538	1907.6	24	23.51	111.94%	0.362	0.405	-

^{* -} repeated at the highest SAR measurement according to the KDB865664D01v01r04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 87 of 347

WCDMA Band IV

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	1 (W/	SAR over g (kg)	Plot page
		` ′			` '	(dBm)		Measured		
	RE Cheek	-	1312	1712.4	24	23.49	112.46%	0.576	0.648	-
	RE Cheek	-	1412	1732.4	24	23.24	119.12%	0.566	0.674	-
R99	RE Cheek	-	1513	1752.6	24	23.28	118.03%	0.613	0.724	172
(Head)	RE Tilt	-	1312	1712.4	24	23.49	112.46%	0.140	0.157	-
	LE Cheek	-	1312	1712.4	24	23.49	112.46%	0.284	0.319	-
	LE Tilt	-	1312	1712.4	24	23.49	112.46%	0.167	0.188	-
	Front side	10	1312	1712.4	24	23.49	112.46%	0.770	0.866	-
	Front side	10	1412	1732.4	24	23.24	119.12%	0.704	0.839	-
	Front side	10	1513	1752.6	24	23.28	118.03%	0.708	0.836	-
	Back side	10	1312	1712.4	24	23.49	112.46%	0.811	0.912	173
Hotspot	Back side*	10	1312	1712.4	24	23.49	112.46%	0.810	0.911	-
	Back side	10	1412	1732.4	24	23.24	119.12%	0.770	0.917	-
	Back side	10	1513	1752.6	24	23.28	118.03%	0.771	0.910	-
	Bottom side	10	1312	1712.4	24	23.49	112.46%	0.438	0.493	-
	Right side	10	1312	1712.4	24	23.49	112.46%	0.296	0.333	-

^{* -} repeated at the highest SAR measurement according to the KDB865664D01v01r04

WCDMA Band V

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	1 (W)	-	Plot page
		, ,			` ′	(dBm)		Measured		
	RE Cheek	-	4132	826.4	24.5	24.05	110.92%	0.313	0.347	174
	RE Cheek	-	4183	836.6	24.5	23.87	115.61%	0.311	0.360	-
R99	RE Cheek	-	4233	846.6	24.5	24.11	109.40%	0.243	0.266	-
(Head)	RE Tilt	-	4233	846.6	24.5	24.11	109.40%	0.165	0.181	-
	LE Cheek	-	4233	846.6	24.5	24.11	109.40%	0.211	0.231	-
	LE Tilt	-	4233	846.6	24.5	24.11	109.40%	0.121	0.132	-
	Front side	10	4132	826.4	24.5	24.05	110.92%	0.544	0.603	-
	Front side	10	4183	836.6	24.5	23.87	115.61%	0.550	0.636	-
Hotspot	Front side	10	4233	846.6	24.5	24.11	109.40%	0.583	0.638	175
Поізроі	Back side	10	4233	846.6	24.5	24.11	109.40%	0.467	0.511	-
	Bottom side	10	4233	846.6	24.5	24.11	109.40%	0.276	0.302	-
	Right side	10	4233	846.6	24.5	24.11	109.40%	0.381	0.417	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 88 of 347

LTE FDD Band II

Mode	Bandwidth (MHz)	Madulation	DD Ciro	DR atast	Position	Distance	СН	Freq.	Max. Rated Avg.	Measure d	Cooling		SAR over V/kg)	Plot
Mode	(MHz)	viodulation	KB Size	RD Start	Position	(mm)	Сп	(MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	page
					Front side	10	18700	1860	24	23.89	102.57%	0.801	0.822	-
					Front side	10	18900	1880	24	23.69	107.40%	0.798	0.857	-
				Front side	10	19100	1900	24	23.61	109.40%	0.848	0.928	176	
				Front side*	10	19100	1900	24	23.61	109.40%	0.845	0.924	-	
		1 RB	0	Back side	10	18700	1860	24	23.89	102.57%	0.784	0.804	-	
					Back side	10	18900	1880	24	23.69	107.40%	0.778	0.836	-
					Back side	10	19100	1900	24	23.61	109.40%	0.812	0.888	-
LTE Band					Bottom side	10	18700	1860	24	23.89	102.57%	0.424	0.435	-
2	20MHz	QPSK			Right side	10	18700	1860	24	23.89	102.57%	0.333	0.342	-
(Hotspot)					Front side	10	18900	1880	23	22.29	117.76%	0.580	0.683	-
			50 RB	0	Back side	10	18900	1880	23	22.29	117.76%	0.617	0.727	-
			30 KB	U	Bottom side	10	18900	1880	23	22.29	117.76%	0.313	0.369	-
					Right side	10	18900	1880	23	22.29	117.76%	0.223	0.263	-
					Front side	10	18700	1860	23	22.24	119.12%	0.554	0.660	-
			100	RB	Back side	10	18700	1860	23	22.24	119.12%	0.513	0.611	-
			100	, IVD	Bottom side	10	18700	1860	23	22.24	119.12%	0.302	0.360	-
					Right side	10	18700	1860	23	22.24	119.12%	0.204	0.243	-

^{* -} repeated at the highest SAR measurement according to the FCC KDB865664D01v01r04

LTE FDD Band IV

Mode	Bandwidth	Modulation	DD Sizo	DP start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling		SAR over V/kg)	Plot
Mode	(MHz)	viodulatioi	NB Size	ND Start	FUSITION	(mm)	GH	(MHz)	Max. Toleranc e (dBm)	Power (dBm)	ŭ	Measured	Reported	page
					Front side	10	20050	1720	24	23.55	110.92%	0.727	0.806	-
					Front side	10	20175	1732.5	24	23.33	116.68%	0.639	0.746	-
					Front side	10	20300	1745	24	23.21	119.95%	0.644	0.772	-
					Back side	10	20050	1720	24	23.55	110.92%	0.924	1.025	177
		1 RB	0	Back side*	10	20050	1720	24	23.55	110.92%	0.904	1.003	-	
					Back side	10	20175	1732.5	24	23.33	116.68%	0.741	0.865	-
				Back side	10	20300	1745	24	23.21	119.95%	0.745	0.894	-	
					Bottom side	10	20050	1720	24	23.55	110.92%	0.412	0.457	-
LTE Band					Right side	10	20050	1720	24	23.55	110.92%	0.275	0.305	-
4	20MHz	QPSK			Front side	10	20050	1720	23	21.90	128.82%	0.517	0.666	-
(Hotspot)					Back side	10	20050	1720	23	21.90	128.82%	0.676	0.871	-
			50 RB	0	Back side	10	20175	1732.5	23	21.88	129.42%	0.621	0.804	-
			00.112		Back side	10	20300	1745	23	21.74	133.66%	0.624	0.834	-
					Bottom side	10	20050	1720	23	21.90	128.82%	0.293	0.377	-
					Right side	10	20050	1720	23	21.90	128.82%	0.196	0.252	-
					Front side	10	20050	1720	23	21.76	133.05%	0.490	0.652	-
			100	RB	Back side	10	20050	1720	23	21.76	133.05%	0.513	0.683	-
			100		Bottom side	10	20050	1720	23	21.76	133.05%	0.275	0.366	-
<u></u>					Right side	10	20050	1720	23	21.76	133.05%	0.184	0.245	-

^{* -} repeated at the highest SAR measurement according to the FCC KDB865664D01v01r04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 89 of 347

LTE FDD Band V

Mode	Bandwidth	Modulation	DD Circ	DP atast	Position	Distance	СН	Freq.	Max. Rated Avg.	Measure d	Saalina		SAR over V/kg)	Plot
Mode	(MHz)	viodulatioi	RD Size	RD Start	Position	(mm)	Сп	(MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	page
					Front side	10	20600	844	24.5	23.45	127.35%	0.504	0.642	178
				0	Back side	10	20600	844	24.5	23.45	127.35%	0.406	0.517	-
			1 RB	0	Bottom side	10	20600	844	24.5	23.45	127.35%	0.316	0.402	
			IND		Right side	10	20600	844	24.5	23.45	127.35%	0.302	0.385	-
				25	Front side	10	20450	829	24.5	23.26	133.05%	0.447	0.595	-
LTE Dand				23	Front side	10	20525	836.5	24.5	23.36	130.02%	0.500	0.650	-
LTE Band 5	10MHz	QPSK			Front side	10	20600	844	23.5	22.51	125.60%	0.408	0.512	-
(Hotspot)	TOWNIZ	QI SIX	25 RB	25	Back side	10	20600	844	23.5	22.51	125.60%	0.330	0.414	-
(i iotopot)			23 ND	23	Bottom side	10	20600	844	23.5	22.51	125.60%	0.280	0.352	-
					Right side	10	20600	844	23.5	22.51	125.60%	0.245	0.308	-
					Front side	10	20600	844	23.5	22.31	131.52%	0.403	0.530	-
			50	RB	Back side	10	20600	844	23.5	22.31	131.52%	0.325	0.427	-
			30	מאו	Bottom side	10	20600	844	23.5	22.31	131.52%	0.264	0.347	-
					Right side	10	20600	844	23.5	22.31	131.52%	0.241	0.317	-

LTE FDD Band VII

Mode	Bandwidth (MHz)	Madulation	DD Circ	DR atast	Position	Distance	СН	Freq.	Max. Rated Avg.	Measure d	Capling		SAR over V/kg)	Plot
Mode	(MHz)	viodulation	KB Size	KD Start	Position	(mm)	СП	(MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	page
					Front side	10	20850	2510	23	22.67	107.89%	0.969	1.045	179
					Front side*	10	20850	2510	23	22.67	107.89%	0.966	1.042	-
		1 R			Front side	10	21100	2535	23	22.62	109.14%	0.878	0.958	-
					Front side	10	21350	2560	23	22.52	111.69%	0.852	0.952	-
		1 RB	0	Back side	10	20850	2510	23	22.67	107.89%	0.760	0.820	-	
				Back side	10	21100	2535	23	22.62	109.14%	0.702	0.766	-	
					Back side	10	21350	2560	23	22.52	111.69%	0.630	0.704	-
LTE Band					Bottom side	10	20850	2510	23	22.67	107.89%	0.394	0.425	-
7	20MHz	QPSK			Left side	10	20850	2510	23	22.67	107.89%	0.601	0.648	-
(Hotspot)					Front side	10	20850	2510	22	21.56	110.66%	0.692	0.766	-
			50 RB	0	Back side	10	20850	2510	22	21.56	110.66%	0.630	0.697	-
			30 KB	U	Bottom side	10	20850	2510	22	21.56	110.66%	0.297	0.329	-
				Left side	10	20850	2510	22	21.56	110.66%	0.426	0.471	-	
				Front side	10	20850	2510	22	21.52	111.69%	0.683	0.763		
			100	DD	Back side	10	20850	2510	22	21.52	111.69%	0.628	0.701	-
			100	' KD	Bottom side	10	20850	2510	22	21.52	111.69%	0.302	0.337	-
					Left side	10	20850	2510	22	21.52	111.69%	0.425	0.475	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 90 of 347

LTE FDD Band XII

Mode	Bandwidth (MHz)	Madulation	DD Size	DD start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling		SAR over N/kg)	Plot
Mode	(MHz)	viodulation	KB SIZE	KD Start	Position	(mm)	Сп	(MHz)	Max. Toleranc e (dBm)	Power (dBm)	Scaling	Measured	Reported	page
					Front side	10	23130	711	24.5	24.00	112.20%	0.167	0.187	-
					Back side	10	23130	711	24.5	24.00	112.20%	0.122	0.137	-
					Bottom side	10	23060	704	24.5	23.87	115.61%	0.219	0.253	-
			1 RB	49	Bottom side	10	23095	707.5	24.5	23.89	115.08%	0.229	0.264	ı
					Bottom side	10	23130	711	24.5	24.00	112.20%	0.242	0.272	180
					Right side	10	23130	711	24.5	24.00	112.20%	0.214	0.240	-
					Left side	10	23130	711	24.5	24.00	112.20%	0.058	0.065	-
LTE Band					Front side	10	23130	711	23.5	23.12	109.14%	0.145	0.158	-
12	10MHz	QPSK			Back side	10	23130	711	23.5	23.12	109.14%	0.091	0.099	-
(Hotspot)			25 RB	25	Bottom side	10	23130	711	23.5	23.12	109.14%	0.193	0.211	-
					Right side	10	23130	711	23.5	23.12	109.14%	0.176	0.192	-
					Left side	10	23130	711	23.5	23.12	109.14%	0.047	0.051	
					Front side	10	23130	711	23.5	23.00	112.20%	0.143	0.160	·
					Back side	10	23130	711	23.5	23.00	112.20%	0.088	0.099	ı
			50	RB	Bottom side	10	23130	711	23.5	23.00	112.20%	0.185	0.208	•
					Right side	10	23130	711	23.5	23.00	112.20%	0.172	0.193	-
					Left side	10	23130	711	23.5	23.00	112.20%	0.047	0.053	-

LTE FDD Band XVII

Mode	Bandwidth	Modulation	DD Sizo	DP start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling		SAR over V/kg)	Plot
wode	(MHz)	viodulatioi	NB Size	ND Start	FUSITION	(mm)	On	(MHz)	Max. Toleranc e (dBm)	Power (dBm)	ŭ	Measured	Reported	page
				25	Bottom side	10	23780	709	24.5	23.87	115.61%	0.233	0.269	-
		1 RB			Front side	10	23800	711	24.5	24.04	111.17%	0.170	0.189	-
			1 DR		Back side	10	23800	711	24.5	24.04	111.17%	0.092	0.102	-
			TIND	49	Bottom side	10	23790	710	24.5	24.00	112.20%	0.235	0.264	181
					Bottom side	10	23800	711	24.5	24.04	111.17%	0.231	0.257	-
LTE Bond					Right side	10	23800	711	24.5	24.04	111.17%	0.207	0.230	-
LTE Band	10MHz	QPSK			Front side	10	23800	711	23.5	23.10	109.65%	0.147	0.161	-
(Hotspot)	TOWNIZ	QI SIX	25 RB	25	Back side	10	23800	711	23.5	23.10	109.65%	0.079	0.087	-
(1.1010)			23 110	2.5	Bottom side	10	23800	711	23.5	23.10	109.65%	0.194	0.213	-
					Right side	10	23800	711	23.5	23.10	109.65%	0.172	0.189	-
				Front side	10	23800	711	23.5	23.05	110.92%	0.146	0.162	-	
		50	RB	Back side	10	23800	711	23.5	23.05	110.92%	0.077	0.085	-	
			30	עטו	Bottom side	10	23800	711	23.5	23.05	110.92%	0.190	0.211	-
					Right side	10	23800	711	23.5	23.05	110.92%	0.169	0.187	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 91 of 347

LTE FDD Band XXX

Mode	Bandwidth (MHz)	Modulation	DD Sizo	DP stort	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V		Plot
iviode	(MHz)	viodulatioi	KB Size	ND Start	FOSITION	(mm)	СП	(MHz)	Max. Toleranc e (dBm)	Power (dBm)	ŭ	Measured	Reported	page
					Front side	10	27710	2310	23.5	22.57	123.88%	0.637	0.789	182
				0	Back side	10	27710	2310	23.5	22.57	123.88%	0.624	0.773	-
			1 RB	" [Bottom side	10	27710	2310	23.5	22.57	123.88%	0.575	0.712	-
			IND		Left side	10	27710	2310	23.5	22.57	123.88%	0.451	0.559	-
				25	Front side	10	27710	2310	23.5	22.41	128.53%	0.604	0.776	-
LTE David				49	Front side	10	27710	2310	23.5	22.37	129.72%	0.597	0.774	-
LTE Band 30	10MHz	QPSK			Front side	10	27710	2310	22.5	21.91	114.55%	0.555	0.636	-
(Hotspot)	TOWNIZ	QI SIN	25 RB	25	Back side	10	27710	2310	22.5	21.91	114.55%	0.519	0.595	-
(1.1010)			23 ND	23	Bottom side	10	27710	2310	22.5	21.91	114.55%	0.466	0.534	-
					Left side	10	27710	2310	22.5	21.91	114.55%	0.335	0.384	-
					Front side	10	27710	2310	22.5	21.53	125.03%	0.551	0.689	-
			50	RB	Back side	10	27710	2310	22.5	21.53	125.03%	0.514	0.643	-
			30	1,0	Bottom side	10	27710	2310	22.5	21.53	125.03%	0.468	0.585	-
					Left side	10	27710	2310	22.5	21.53	125.03%	0.339	0.424	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 92 of 347

WLAN802.11 b

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	_	Plot page
			,		,	Tolerance (dBm)	(dBm)		Measured	Reported	1 0
		RE Cheek	-	1	2412	17	16.09	123.31%	0.771	0.951	-
		RE Cheek	-	6	2437	17	16.15	121.62%	0.802	0.975	183
	WLAN 802.11 b	RE Cheek*	-	6	2437	17	16.15	121.62%	0.788	0.958	-
		RE Tilt	-	6	2437	17	16.15	121.62%	0.564	0.686	-
Main	(Head)	LE Cheek	-	6	2437	17	16.15	121.62%	0.284	0.345	-
IVIAIII		LE Tilt	-	6	2437	17	16.15	121.62%	0.268	0.326	-
		Front side	10	6	2437	17	16.15	121.62%	0.218	0.265	-
		Back side	10	6	2437	17	16.15	121.62%	0.315	0.383	184
		Top side	10	6	2437	17	16.15	121.62%	0.180	0.219	-
		Left side	10	6	2437	17	16.15	121.62%	0.188	0.229	-

^{* -} repeated at the highest SAR measurement according to the KDB865664D01v01r04

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			, ,			Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	11	2462	17	16.6	109.65%	0.123	0.135	-
WLAN 802.11 b	RE Tilt	-	11	2462	17	16.6	109.65%	0.072	0.079	-	
		LE Cheek	-	11	2462	17	16.6	109.65%	0.426	0.467	185
(Head)	LE Tilt	-	11	2462	17	16.6	109.65%	0.197	0.216	-	
Aux		Front side	10	11	2462	17	16.6	109.65%	0.148	0.162	-
	Hotspot	Back side	10	11	2462	17	16.6	109.65%	0.247	0.271	186
	ποιδροι	Top side	10	11	2462	17	16.6	109.65%	0.027	0.030	-
	Left side	10	11	2462	17	16.6	109.65%	0.219	0.240	-	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

documents, subject to Terms and Conditions for Electronic Documents at www.sigs.com/rerms_e-accument.nim. Attention is drawn to the limitation of liability, indemnitication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 93 of 347

WLAN802.11 a 5.2G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	-	Plot page
			,		,	Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	36	5180	14	13.86	103.28%	1.290	1.332	187
		RE Cheek*	-	36	5180	14	13.86	103.28%	1.270	1.312	-
	WLAN	RE Cheek	-	40	5200	14	13.75	105.93%	0.890	0.943	-
Main	802.11 a 5.2G	RE Tilt	-	36	5180	14	13.86	103.28%	1.110	1.146	-
	(Head)	RE Tilt	-	40	5200	14	13.75	105.93%	0.845	0.895	-
	, ,	LE Cheek	-	36	5180	14	13.86	103.28%	0.402	0.415	-
		LE Tilt	-	36	5180	14	13.86	103.28%	0.446	0.461	-

^{* -} repeated at the highest SAR measurement according to the KDB865664D01v01r04

WLAN802.11 n(20M) 5.2G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	RE Cheek	-	44	5220	14	13.88	102.80%	0.970	0.997	188
	802.11	RE Cheek	-	48	5240	14	13.76	105.68%	0.742	0.784	-
Main	n(20M)	RE Tilt	-	44	5220	14	13.88	102.80%	0.865	0.889	-
	5.2G	LE Cheek	-	44	5220	14	13.88	102.80%	0.389	0.400	-
	(Head)	LE Tilt	-	44	5220	14	13.88	102.80%	0.402	0.413	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 94 of 347

WLAN802.11 n(40M) 5.2G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	_	Plot page
			,		,	Tolerance (dBm)	(dBm)		Measured	Reported	. 0
		RE Cheek	-	38	5190	14	13.87	103.04%	0.989	1.019	-
	WLAN	RE Cheek	-	46	5230	14	13.75	105.93%	1.200	1.271	189
	802.11 n (40M)	RE Tilt	-	38	5190	14	13.87	103.04%	0.913	0.941	-
Main	5.2G	RE Tilt	-	46	5230	14	13.75	105.93%	1.120	1.186	-
IVIAIII	(Head)	LE Cheek	-	38	5190	14	13.87	103.04%	0.305	0.314	-
		LE Tilt	-	38	5190	14	13.87	103.04%	0.328	0.338	-
	Body-	Front side	10	38	5190	14	13.87	103.04%	0.258	0.266	190
	worn	Back side	10	38	5190	14	13.87	103.04%	0.243	0.250	-

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
					, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	Front side	0	38	5190	14	13.57	110.41%	1.100	1.214	191
Main	802.11 n (40M)	Back side	0	38	5190	14	13.57	110.41%	0.997	1.101	-
IVIAIII	5.2G	Top side	0	38	5190	14	13.57	110.41%	0.390	0.431	-
	(Hand)	Left side	0	38	5190	14	13.57	110.41%	0.460	0.508	-

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	kg)	Plot page
			, ,			Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	RE Cheek	-	38	5190	14	13.83	103.99%	0.161	0.167	-
	802.11 n (40M)	RE Tilt	-	38	5190	14	13.83	103.99%	0.150	0.156	-
Aux	5.2G	LE Cheek	-	38	5190	14	13.83	103.99%	0.461	0.479	192
Aux	(Head)	LE Tilt	-	38	5190	14	13.83	103.99%	0.294	0.306	-
	Body-	Front side	10	38	5190	14	13.83	103.99%	0.145	0.151	-
	worn	Back side	10	38	5190	14	13.83	103.99%	0.279	0.290	193

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	Front side	0	38	5190	14	13.83	103.99%	0.649	0.675	-
Aux	802.11 n	Back side	0	38	5190	14	13.83	103.99%	0.664	0.691	-
Aux	(40M) 5.2G	Top side	0	38	5190	14	13.83	103.99%	0.171	0.178	-
	(Hand)	Right side	0	38	5190	14	13.83	103.99%	0.807	0.839	194

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 95 of 347

WLAN802.11 ac(40M) 5.2G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	J	Plot page
			,		,	Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	38	5190	14	13.60	109.65%	0.954	1.046	195
	WLAN	RE Cheek	-	46	5230	14	13.28	118.03%	0.924	1.091	-
Main	802.11 ac(40M)	RE Tilt	-	38	5190	14	13.60	109.65%	0.922	1.011	-
IVIAIII	5.2G	RE Tilt	-	46	5230	14	13.28	118.03%	0.854	1.008	-
	(Head)	LE Cheek	-	38	5190	14	13.60	109.65%	0.300	0.329	-
		LE Tilt	-	38	5190	14	13.60	109.65%	0.315	0.345	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 96 of 347

WLAN802.11 a 5.3G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	•	Plot page
			,		,	Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	52	5260	14	13.92	101.86%	1.310	1.334	196
		RE Cheek*	-	52	5260	14	13.92	101.86%	1.220	1.243	-
		RE Cheek	-	56	5280	14	13.87	103.04%	1.300	1.340	-
	WLAN	RE Cheek	-	60	5300	14	13.83	103.99%	1.280	1.331	-
Main	802.11 a	RE Cheek	-	64	5320	14	13.80	104.71%	1.260	1.319	-
IVIAIII	5.3G	RE Tilt	-	52	5260	14	13.92	101.86%	1.210	1.232	-
	(Head)	RE Tilt	-	56	5280	14	13.87	103.04%	1.190	1.226	-
		RE Tilt	-	60	5300	14	13.83	103.99%	1.150	1.196	-
		LE Cheek	-	52	5260	14	13.92	101.86%	0.427	0.435	-
		LE Tilt	-	52	5260	14	13.92	101.86%	0.375	0.382	-

^{* -} repeated at the highest SAR measurement according to the KDB865664D01v01r04

WLAN802.11 n(20M) 5.3G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	kg)	Plot page
			,		,	Tolerance (dBm)	(dBm)		Measured	Reported	. 3
	WI AN	RE Cheek	-	52	5260	14	13.71	106.91%	0.993	1.062	197
	WLAN 802.11	RE Cheek	-	56	5280	14	13.68	107.65%	0.720	0.775	-
Main		RE Tilt	-	52	5260	14	13.71	106.91%	0.742	0.793	-
	5.3G	LE Cheek	-	52	5260	14	13.71	106.91%	0.312	0.334	-
	(Head)	LE Tilt	-	52	5260	14	13.71	106.91%	0.289	0.309	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 97 of 347

WLAN802.11 n(40M) 5.3G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	-	Plot page
			,		,	Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	54	5270	14	13.16	121.34%	0.973	1.181	-
	WLAN 802 11 p	RE Cheek	-	62	5310	14	13.12	122.46%	1.030	1.261	198
	802.11 n (40M)	RE Tilt	-	54	5270	14	13.16	121.34%	0.955	1.159	-
Main	5.3G	RE Tilt	-	62	5310	14	13.12	122.46%	0.954	1.168	-
IVIAIII	(Head)	LE Cheek	-	54	5270	14	13.16	121.34%	0.318	0.386	-
	(11044)	LE Tilt	-	54	5270	14	13.16	121.34%	0.341	0.414	-
	Body-	Front side	10	54	5270	14	13.16	121.34%	0.282	0.342	199
	worn	Back side	10	54	5270	14	13.16	121.34%	0.241	0.292	-

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
			, ,			Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	Front side	0	54	5270	14	13.16	121.34%	1.080	1.310	200
Main	802.11 n (40M)	Back side	0	54	5270	14	13.16	121.34%	1.030	1.250	-
ivialii	5.3G	Top side	0	54	5270	14	13.16	121.34%	0.404	0.490	-
	(Hand)	Left side	0	54	5270	14	13.16	121.34%	0.393	0.477	-

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	RE Cheek	-	62	5310	14	13.98	100.46%	0.191	0.192	-
	802.11 n	RE Tilt	-	62	5310	14	13.98	100.46%	0.187	0.188	-
Aux	(40M) 5.3G	LE Cheek	-	62	5310	14	13.98	100.46%	0.607	0.610	201
Aux	(Head)	LE Tilt	-	62	5310	14	13.98	100.46%	0.316	0.317	-
	Body-	Front side	10	62	5310	14	13.98	100.46%	0.195	0.196	-
	worn	Back side	10	62	5310	14	13.98	100.46%	0.539	0.541	202

Antenna	Mode	de Position Distance (mm)		Distance (mm) CH		Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	Front side	0	62	5310	14	13.98	100.46%	0.696	0.699	-
Aux	802.11 n (40M)	Back side	0	62	5310	14	13.98	100.46%	1.000	1.005	-
Aux	5.3G	Top side	0	62	5310	14	13.98	100.46%	0.181	0.182	-
	(Hand)	Right side	0	62	5310	14	13.98	100.46%	1.070	1.075	203

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 98 of 347

WLAN802.11 ac(40M) 5.3G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	•	Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	. 0
		RE Cheek	-	54	5270	14	13.15	121.62%	0.898	1.092	-
	WLAN 802.11 Main ac (40M)	RE Cheek	-	62	5310	14	13.16	121.34%	1.020	1.238	204
Main		RE Tilt	-	54	5270	14	13.15	121.62%	0.845	1.028	-
IVIAIII	5.3G	RE Tilt	-	62	5310	14	13.16	121.34%	0.974	1.182	-
	(Head)	LE Cheek	-	62	5310	14	13.16	121.34%	0.331	0.402	-
	(1.000)	LE Tilt	-	62	5310	14	13.16	121.34%	0.342	0.415	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 99 of 347

WLAN802.11 a 5.6G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	_	Plot page
			, ,			Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	100	5500	13	12.98	100.46%	0.976	0.981	-
		RE Cheek	-	120	5600	13	12.78	105.20%	1.180	1.241	205
	WLAN	RE Cheek*	-	120	5600	13	12.78	105.20%	1.130	1.189	-
	802.11 a 5.6G	RE Tilt	-	100	5500	13	12.98	100.46%	0.985	0.990	-
Main	(Head)	RE Tilt	-	120	5600	13	12.78	105.20%	0.950	0.999	-
		LE Cheek	-	100	5500	13	12.98	100.46%	0.380	0.382	-
		LE Tilt	-	100	5500	13	12.98	100.46%	0.453	0.455	-
	Body-	Front side	10	100	5500	13	12.98	100.46%	0.290	0.291	206
	worn	Back side	10	100	5500	13	12.98	100.46%	0.188	0.189	-

^{* -} repeated at the highest SAR measurement according to the KDB865664D01v01r04

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g 'kg)	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	Front side	0	100	5500	13	12.98	100.46%	1.030	1.035	207
Main	802.11 a	Back side	0	100	5500	13	12.98	100.46%	0.652	0.655	-
IVIAIII	5.6G	Top side	0	100	5500	13	12.98	100.46%	0.456	0.458	-
	(Hand)	Left side	0	100	5500	13	12.98	100.46%	0.331	0.333	-

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	U	Plot page
			,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	1 0
		RE Cheek	-	140	5700	13	12.76	105.68%	0.203	0.215	-
	WLAN	RE Tilt	-	140	5700	13	12.76	105.68%	0.106	0.112	-
	802.11 a 5.6G	LE Cheek	-	100	5500	13	12.62	109.14%	0.707	0.772	-
Aux	(Head)	LE Cheek	-	140	5700	13	12.76	105.68%	0.793	0.838	208
	, ,	LE Tilt	-	140	5700	13	12.76	105.68%	0.388	0.410	-
	Body-	Front side	10	140	5700	13	12.76	105.68%	0.283	0.299	-
	worn	Back side	10	140	5700	13	12.76	105.68%	0.740	0.782	209

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
			, ,			Tolerance (dBm)	(dBm)		Measured	Reported	
		Front side	0	140	5700	13	12.76	105.68%	0.869	0.918	-
	WLAN	Back side	0	140	5700	13	12.76	105.68%	1.410	1.490	-
Aux	802.11 a 5.6G	Top side	0	140	5700	13	12.76	105.68%	0.077	0.081	-
	5.6G (Hand)	Right side	0	100	5500	13	12.62	109.14%	2.050	2.237	-
	, ,	Right side	0	140	5700	13	12.76	105.68%	2.260	2.388	210

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 100 of 347

WLAN802.11 n(20M) 5.6G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	RE Cheek	-	100	5500	13	12.78	105.20%	0.819	0.862	211
	802.11	RE Cheek	-	120	5600	13	12.52	111.69%	0.712	0.795	-
Main	n(20M)	RE Tilt	-	100	5500	13	12.78	105.20%	0.745	0.784	-
	5.6G	LE Cheek	-	100	5500	13	12.78	105.20%	0.289	0.304	-
	(Head)	LE Tilt	-	100	5500	13	12.78	105.20%	0.328	0.345	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 101 of 347

WLAN802.11 ac(80M) 5.6G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			, ,		,	Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	122	5610	13	12.72	106.66%	0.872	0.930	212
	WLAN 802 11	RE Cheek	-	138	5690	13	12.39	115.08%	0.738	0.849	-
	802.11	RE Tilt	-	122	5610	13	12.72	106.66%	0.757	0.807	-
Main	ac (80M)	RE Tilt	-	138	5690	13	12.39	115.08%	0.724	0.833	-
IVIAIII	(Head)	LE Cheek	-	122	5610	13	12.72	106.66%	0.401	0.428	-
		LE Tilt	-	122	5610	13	12.72	106.66%	0.479	0.511	-
	Body-	Front side	10	122	5610	13	12.72	106.66%	0.226	0.241	213
	worn	Back side	10	122	5610	13	12.72	106.66%	0.134	0.143	-

Antenna	Mode	Position	Distance (mm)	CH I		Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	Front side	0	122	5610	13	12.72	106.66%	0.993	1.059	214
Main	802.11 ac (80M)	Back side	0	122	5610	13	12.72	106.66%	0.427	0.455	-
IVIAIII	5.6G	Top side	0	122	5610	13	12.72	106.66%	0.281	0.300	-
	(Hand)	Left side	0	122	5610	13	12.72	106.66%	0.252	0.269	-

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	_	Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	. 0
	WLAN	RE Cheek	-	122	5610	13	12.92	101.86%	0.181	0.184	-
	802.11a c (80M)	RE Tilt	-	122	5610	13	12.92	101.86%	0.094	0.096	-
Aux	5.6G	LE Cheek	-	122	5610	13	12.92	101.86%	0.737	0.751	215
Aux	(Head)	LE Tilt	-	122	5610	13	12.92	101.86%	0.368	0.375	-
	Body-	Front side	10	122	5610	13	12.92	101.86%	0.286	0.291	-
	worn	Back side	10	122	5610	13	12.92	101.86%	0.769	0.783	216

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	. 0
	WLAN	Front side	0	122	5610	13	12.92	101.86%	0.949	0.967	-
	802.11	Back side	0	122	5610	13	12.92	101.86%	1.320	1.345	-
Aux	ac (80M)	Top side	0	122	5610	13	12.92	101.86%	0.091	0.093	-
	5.6G (Hand)	Right side	0	122	5610	13	12.92	101.86%	2.050	2.088	-
	(Hand)	Right side	0	138	5690	13	12.83	103.99%	2.090	2.173	217

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 102 of 347

WLAN802.11 a 5.8G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot page
			, ,		` ,	Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	157	5785	13 12.72		106.66%	0.752	0.802	-
		RE Cheek	-	165	5825	13	12.73	106.41%	0.916	0.975	218
	WLAN	RE Cheek*	-	165	5825	13	12.73	106.41%	0.902	0.960	-
	802.11 a 5.8G	RE Tilt	-	157	5785	13	12.72	106.66%	0.807	0.861	-
Main	(Head)	RE Tilt	-	165	5825	13	12.73	106.41%	0.805	0.857	-
		LE Cheek	-	165	5825	13	12.73	106.41%	0.358	0.381	-
		LE Tilt	-	165	5825	13	12.73	106.41%	0.499	0.531	-
	Body-	Front side	10	165	5825	13	12.73	106.41%	0.210	0.223	219
	worn	Back side	10	165	5825	13	12.73	106.41%	0.140	0.149	-

^{* -} repeated at the highest SAR measurement according to the KDB865664D01v01r04

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 10g (W/kg)		Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
WLAN		Front side	0	165	5825	13	12.73	106.41%	0.906	0.964	220
Main	802 11 a	Back side	0	165	5825	13	12.73	106.41%	0.457	0.486	-
IVIAIII	5.8G	Top side	0	165	5825	13	12.73	106.41%	0.512	0.545	-
	(Hand)	Left side	0	165	5825	13	12.73	106.41%	0.260	0.277	-

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	Plot page	
			, ,		` ,	Tolerance (dBm)	(dBm)		Measured	Reported	
WLAN	WLAN	RE Cheek	-	149	5745	13	12.73	106.41%	0.144	0.153	-
	802.11a	RE Tilt	-	149	5745	13	12.73	106.41%	0.084	0.089	-
Aux	5.8G	LE Cheek	-	149	5745	13	12.73	106.41%	0.599	0.637	221
Aux	(Head)	LE Tilt	-	149	5745	13	12.73	106.41%	0.154	0.164	-
	Body-	Front side	10	149	5745	13	12.73	106.41%	0.206	0.219	-
worn		Back side	10	149	5745	13	12.73	106.41%	0.543	0.578	222

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 10g (W/kg)		Plot page
					, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
	WLAN	Front side	0	149	5745	13	12.73	106.41%	0.782	0.832	-
Aux	802.11 a	Back side	0	149	5745	13	12.73	106.41%	1.300	1.383	-
Aux	5.8G	Top side	0	149	5745	13	12.73	106.41%	0.045	0.048	-
	(Hand)	Right side	0	149	5745	13	12.73	106.41%	1.590	1.692	223

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 103 of 347

Bluetooth

Antenna	Mode	Position	Distance	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot
			(mm)			Tolerance (dBm)	(dBm)		Measured	Reported	page
		Front	0	39	2441	4.00	2.05	156.68%	0.005	0.008	-
Main	Bluetooth(GFSK)	Back	0	39	2441	4.00	2.05	156.68%	0.012	0.019	224
IVIAIII Biuelootii(GF3N	Bidetootii(GF3K)	Top side	0	39	2441	4.00	2.05	156.68%	0.007	0.011	-
		Left side	0	39	2441	4.00	2.05	156.68%	0.049	0.077	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 104 of 347

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Head	Body-Worn	Hotspot	Hand
GSM850/1900 + 2.4GHz Wi-Fi Main	Yes	Yes	No	No
GSM850/1900 + 2.4GHz Wi-Fi Aux	Yes	Yes	No	No
GSM850/1900 + 2.4GHz Wi-Fi MIMO	Yes	Yes	No	No
GPRS850/1900 + 2.4GHz Wi-Fi Main	No	Yes	Yes	No
GPRS850/1900 + 2.4GHz Wi-Fi Aux	No	Yes	Yes	No
GPRS850/1900 + 2.4GHz Wi-Fi MIMO	No	Yes	Yes	No
UMTS B2/4/5 + 2.4GHz Wi-Fi Main	Yes	Yes	Yes	No
UMTS B2/4/5 + 2.4GHz Wi-Fi Aux	Yes	Yes	Yes	No
UMTS B2/4/5 + 2.4GHz Wi-Fi MIMO	Yes	Yes	Yes	No
LTE B2/4/5/7/12/17/30 + 2.4GHz Wi-Fi Main	No	Yes	Yes	No
LTE B2/4/5/7/12/17/30 + 2.4GHz Wi-Fi Aux	No	Yes	Yes	No
LTE B2/4/5/7/12/17/30 + 2.4GHz Wi-Fi MIMO	No	Yes	Yes	No
GSM850/1900 + 5GHz Wi-Fi Main	Yes	Yes	No	No
GSM850/1900 + 5GHz Wi-Fi Aux	Yes	Yes	No	No
GSM850/1900 + 5GHz Wi-Fi MIMO	Yes	Yes	No	No
GPRS850/1900 + 5GHz Wi-Fi Main	No	Yes	No	No
GPRS850/1900 + 5GHz Wi-Fi Aux	No	Yes	No	No
GPRS850/1900 + 5GHz Wi-Fi MIMO	No	Yes	No	No
UMTS B2/4/5 + 5GHz Wi-Fi Main	Yes	Yes	No	No
UMTS B2/4/5 + 5GHz Wi-Fi Aux	Yes	Yes	No	No
UMTS B2/4/5 + 5GHz Wi-Fi MIMO	Yes	Yes	No	No
LTE B2/4/5/7/12/17/30 + 5GHz Wi-Fi Main	No	Yes	No	No
LTE B2/4/5/7/12/17/30 + 5GHz Wi-Fi Aux	No	Yes	No	No
LTE B2/4/5/7/12/17/30 + 5GHz Wi-Fi MIMO	No	Yes	No	No

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 105 of 347

Simultaneous Transmit Configurations	Head	Body-Worn	Hotspot	Hand
GSM850/1900 + Bluetooth + 2.4GHz Wi-Fi Aux	No	Yes	No	No
GPRS850/1900 + Bluetooth + 2.4GHz Wi-Fi Aux	No	Yes	Yes	No
UMTS B2/4/5 + Bluetooth + 2.4GHz Wi-Fi Aux	No	Yes	Yes	No
LTE B2/4/5/7/12/17/30 + Bluetooth + 2.4GHz Wi-Fi Aux	No	Yes	Yes	No
GSM850/1900 + Bluetooth + 5GHz Wi-Fi Aux	No	Yes	No	No
GPRS850/1900 + Bluetooth + 5GHz Wi-Fi Aux	No	Yes	No	No
UMTS B2/4/5 + Bluetooth + 5GHz Wi-Fi Aux	No	Yes	No	No
LTE B2/4/5/7/12/17/30 + Bluetooth + 5GHz Wi-Fi Aux	No	Yes	No	No

Notes:

- 1. Bluetooth and WLAN Main share the same antenna path, and BT may transmit simultaneously with
- 2. Based on KDB447498D01 note 36, when SAR test exclusion is allowed by other published RF exposure KDB procedures, such as the 2.5 cm hotspot mode SAR test exclusion for an edge or surface, then estimated SAR is not required to determine simultaneous SAR test exclusion. Also, based on KDB648474D04 note 6, simultaneous transmission SAR for 10-g extremity SAR requires consideration only when standalone 10-g SAR is required.
- 3. Since the extremity SAR is not required for WWAN/WLAN 2.4GHz based on hotspot SAR < 1.2 addressed in KDB 648474D04, and the extremity SAR is only required for WLAN 5GHz, hence the simultaneous transmission analysis for extremity is not required.
- 4. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission (for 802.11n/ac) is the same with that used in standalone transmission (for 802.11a/b/g/n/ac), and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the SAR measurement for 802.11n/ac MIMO.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 106 of 347

3.1 Estimated SAR calculation

According to KDB447498 D01v05 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power(mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(GHz)}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 107 of 347

Simultaneous Transmission Combination

ı	reported \$	SAR WWAN a	nd WLAN 2	.4GHz, ΣSAR	evaluation	
Frequency	D	osition	rep	orted SAR / W	//kg	ΣSAR
band	P	OSILION	WWAN	WLAN Main	WLAN Aux	<1.6W/kg
		Right cheek	0.360	0.975	0.135	1.470
GSM 850	Head	Right tilt	0.190	0.686	0.079	0.955
GSIVI 650	Head	Left cheek	0.243	0.345	0.467	1.055
		Left tilt	0.149	0.326	0.216	0.691
		Front	0.614	0.265	0.162	1.041
		Back	0.450	0.383	0.271	1.104
GPRS 850	Hotspot	Тор	•	0.219	0.030	-
(1Dn4UP)		Bottom	0.184	-	1	-
		Right	0.311	-	•	-
		Left	•	0.229	0.240	-
		Right cheek	0.397	0.975	0.135	1.507
GSM 1900	Head	Right tilt	0.087	0.686	0.079	0.852
GSW 1900	Head	Left cheek	0.199	0.345	0.467	1.011
		Left tilt	0.104	0.326	0.216	0.646
		Front	0.574	0.265	0.162	1.001
		Back	0.693	0.383	0.271	1.347
GPRS 1900 (1Dn3UP)	Hotspot	Тор	-	0.219	0.030	-
	Ποισμοί	Bottom	0.306	-	-	-
		Right	0.239	-	-	-
		Left	-	0.229	0.240	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 108 of 347

	reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation												
Frequency	D/	osition	re	ported SAR / W	//kg	ΣSAR							
band	Position		WWAN WLAN Main		WLAN Aux	<1.6W/kg							
		Right cheek	0.701	0.975	0.135	1.811							
	Head	Right tilt	0.165	0.686	0.079	0.930							
	пеац	Left cheek	0.340	0.345	0.467	1.152							
		Left tilt	0.187	0.326	0.216	0.729							
WCDMA		Front	0.899	0.265	0.162	1.326							
Band II		Back	1.041	0.383	0.271	1.695							
	Hotopot	Тор	-	0.219	0.030	-							
	Hotspot	Bottom	0.479	1	1	-							
		Right	0.405	-	-	-							
		Left	-	0.229	0.240	=							

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			х	у	z	(vv/kg)	(mm)		SAR Test
WCDMA Band	Right cheek	0.701	4.77	6.24	-0.03	1.676	101.7	0.021	SPLSR≤ 0.04.
WLAN Main	Trigiti cheek	0.975	1.71	-3.45	-0.11	1.070	101.7	0.021	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 109 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(W/Kg)	(mm)		SAR Test
WCDMA Band	Right cheek	0.701 4.77 6.24 -0.03		0.836	69.6	0.011	SPLSR≤		
WLAN Aux	Night Cheek	0.135	-1.05	2.47	0.53	0.830	09.0	0.011	0.04, Not required



Conditions Position		SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	у	z	(W/Kg)	(mm)		SAR Test
WLAN Main	Right cheek	0.975	1.71	-3.45	-0.11	1.11	65.7	0.018	SPLSR≤
WLAN Aux	Right cheek	0.135	-1.05	2.47	0.53	1.11	03.7	0.018	0.04, Not required

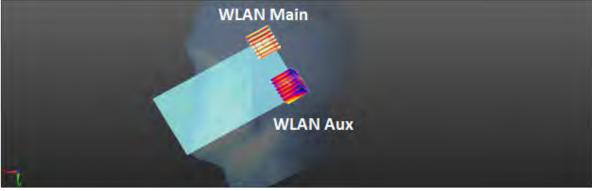

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 110 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z (W/kg) Distance (mm)			SAR Test	
WCDMA Band II	Back side	1.041	2.40	7.09	-0.08	1.424	151.7	0.011	SPLSR≤ 0.04.
WLAN Main	Dack Side	0.383	-2.92	-7.12	-0.09	1.424	131.7	0.011	Not required

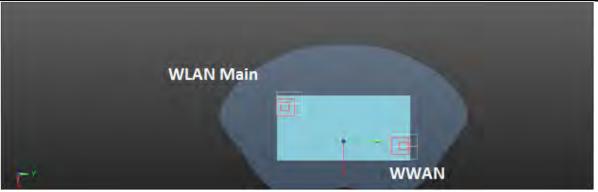

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance		Simultaneous Transmission
		(W/kg)	x	У	z	(W/Kg)	(mm)		SAR Test
WCDMA Band II	11		2.40	7.09	-0.08	1.312	132.1	0.011	SPLSR≤ 0.04,
WLAN Aux	Dack Side	0.271	4.30	-5.98	-0.10	1.312	132.1	0.011	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 111 of 347

Conditions Position		SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(W/Kg)	(mm)		SAR Test
WLAN Main	Back side	0.383	-2.92	-7.12	-0.09	0.654	73.1	0.007	SPLSR≤
WLAN Aux	Dack Side	0.271	4.30	-5.98	-0.10	0.054	73.1	0.007	0.04, Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 112 of 347

	reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation										
Frequency	De	sition	re	ported SAR / W	//kg	ΣSAR					
band	۲	JSIIIOH	WWAN	WLAN Main	WLAN Aux	<1.6W/kg					
		Right cheek	0.724	0.975	0.135	1.834					
Head	Hoad	Right tilt	0.157	0.686	0.079	0.922					
	Head	Left cheek	0.319	0.345	0.467	1.131					
		Left tilt	0.188	0.326	0.216	0.730					
WCDMA		Front	0.866	0.265	0.162	1.293					
Band IV		Back	0.917	0.383	0.271	1.571					
	Hotspot	Тор	-	0.219	0.030	-					
	Ποιδροί	Bottom	0.493	1	ı	-					
		Right	0.333	-		-					
		Left	-	0.229	0.240	-					

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	/kg) x y z (w/kg) Distance (mm)			SAR Test			
WCDMA Band IV	Right cheek	0.724	4.85	6.12	-0.04	1.699	100.7	0.022	SPLSR≤
WLAN Main	Night Cheek	0.975	1.71	-3.45	-0.11	1.099	100.7	0.022	0.04, Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 113 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	z	(W/kg) Distance (mm)			SAR Test
WCDMA Band IV	Right cheek	0.724	4.85	6.12	-0.04	0.859	859 69.6		SPLSR≤ 0.04.
WLAN Aux	Trigiti cheek	0.135	-1.05	2.47	0.53	0.009	09.0	0.011	Not required

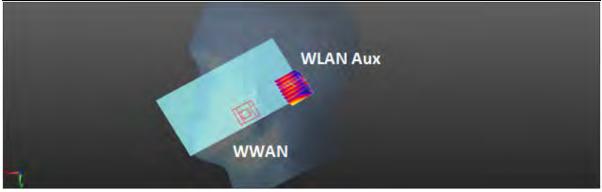

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	z	(VV/Kg)	/kg) Distance (mm)		SAR Test
WLAN Main	Right cheek	0.975	975 1.71 -3.45 -0.11		0.018	SPLSR≤ 0.04,			
WLAN Aux	Night Cheek	0.135	-1.05	2.47	0.53	1.11	03.7	0.016	Not required

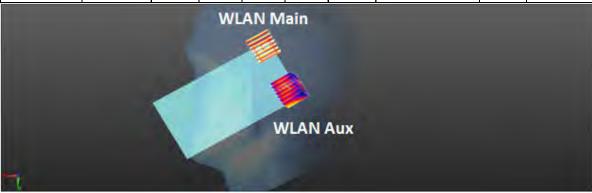

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 114 of 347

	reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation										
Frequency	D _c	osition	re	ported SAR / W	//kg	ΣSAR					
band	۲۷	JSIIIOH	WWAN	WLAN Main	WLAN Aux	<1.6W/kg					
Head	Right cheek	0.360	0.975	0.135	1.470						
	Hoad	Right tilt	0.181	0.686	0.079	0.946					
	Heau	Left cheek	0.231	0.345	0.467	1.043					
		Left tilt	0.132	0.326	0.216	0.674					
WCDMA		Front	0.638	0.265	0.162	1.065					
Band V		Back	0.511	0.383	0.271	1.165					
	Hotopot	Тор	-	0.219	0.030	1					
	Hotspot	Bottom	0.302		-	-					
		Right	0.417		-	-					
	•	Left	-	0.229	0.240	-					

	reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation																					
Frequency	Do	sition	rep	orted SAR / W	//kg	ΣSAR																
band	FC	osition	WWAN	WLAN Main	WLAN Aux	<1.6W/kg																
			Front	0.928	0.265	0.162	1.355															
		Back	0.888	0.383	0.271	1.542																
LTE FDD	Hotopot	Тор	ı	0.219	0.030	-																
Band II	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot	Hotspot -	Hotspot -	Hotspot	Hotspot	Hotspot	Bottom	0.435	-	-	-
		Right	0.342	-	-	-																
		Left	-	0.229	0.240	-																

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 115 of 347

reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation										
Frequency	Do	scition	rep	orted SAR / W	//kg	ΣSAR				
band	FC	Position		WLAN Main	WLAN Aux	<1.6W/kg				
		Front	0.806	0.265	0.162	1.233				
		Back	1.025	0.383	0.271	1.679				
LTE FDD	Hotspot	Тор	-	0.219	0.030	-				
Band IV	Ποιδροί	Bottom	0.457	-	-	-				
		Right	0.305	-	0.383 0.271 1.67 0.219 0.030 - - - - - - -	=				
		Left	-	0.229	0.240	-				

	Conditions	Position	SAR Value (W/kg)	Coo	rdinates y	S (cm) ΣSAR (W/kg)		Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
L	.TE FDD Band IV	Back side	1.025	3.16	6.69	-0.07	1.408	150.9	0.011	SPLSR≤
	WLAN Main	back side	0.383	-2.92	-7.12	-0.09	1.400	150.9	0.011	0.04, Not required

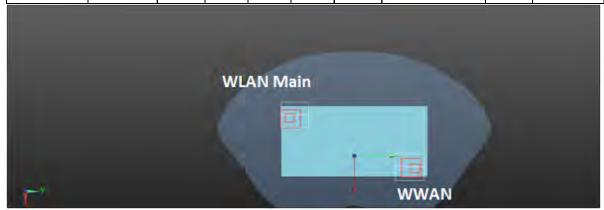

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 116 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(vv/kg)	(mm)		SAR Test
LTE FDD Band IV	Back side	1.025	3.16	6.69	-0.07	1.296	127.2	0.012	SPLSR≤
WLAN Aux		0.271	4.30	-5.98	-0.10	1.290	127.2	0.012	0.04, Not required

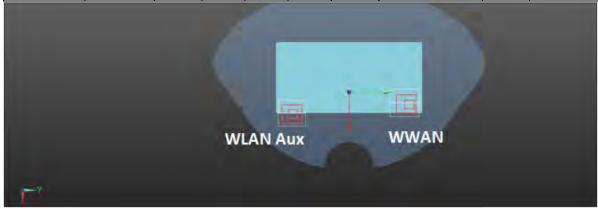

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(W/Ng)	(mm)		SAR Test
WLAN Main	Back side	0.383	-2.92	-7.12	-0.09	0.654	73.1	0.007	SPLSR≤ 0.04.
WLAN Aux	Dack Side	0.271	4.30	-5.98	-0.10	0.034	73.1	0.007	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 117 of 347

	reported S	SAR WWAN a	nd WLAN 2	.4GHz, ΣSAR	evaluation				
Frequency		. 10	rep	orted SAR / W	//kg	ΣSAR			
band	Po	sition	WWAN	WLAN Main	WLAN Aux	<1.6W/kg			
		Front	0.650	0.265	0.162	1.077			
		Back	0.517	0.383	0.271	1.171			
LTE FDD	Hotopot	Тор	-	0.219	0.030	-			
Band V	Hotspot	Bottom	0.402	-	-	_			
		Right	0.385	-	-	-			
		Left	-	0.229	0.240	-			
		Front	1.045	0.265	0.162	1.472			
	I Hatenat	Back	0.820	0.383	0.271	1.474			
LTE FDD		Тор	-	0.219	0.030	-			
Band VII	Поізроі	Bottom	0.425	-	-	-			
		Right	-	-	-	-			
		Left	0.648	0.229	0.240	1.117			
		Front	0.187	0.265	0.162	0.614			
		Back	0.137	0.383	0.271	0.791			
LTE FDD	Hotopot	Hotspot	Hotspot	Hotspot -	Тор	-	0.219	0.030	-
Band XII	Поізроі	Bottom	0.272	-	-	-			
		Right	0.240	-	-	-			
		Left	0.065	0.229	0.240	0.534			
		Front	0.189	0.265	0.162	0.616			
		Back	0.102	0.383	0.271	0.756			
LTE FDD	Hotspot	Тор	-	0.219	0.030	-			
Band XVII	Ποιδροί	Bottom	0.269	-	-	-			
		Right	0.230	-	-	-			
		Left	-	0.229	0.240	-			
		Front	0.789	0.265	0.162	1.216			
		Back	0.773	0.383	0.271	1.427			
LTE FDD Hotspot	Hotenot	Тор	-	0.219	0.030	-			
	Ποιδροί	Bottom	0.712	-	-	-			
	-	Right	-	-	-	-			
		ŀ	Left	0.559	0.229	0.240	1.028		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 118 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation													
Frequency	D	noition	rep	orted SAR / W	//kg	ΣSAR								
band	P	osition	WWAN	WLAN Main	WLAN Aux	<1.6W/kg								
		Right cheek	0.360	1.334	0.215	1.909								
	Head	Right tilt	0.190	1.232	0.188	1.610								
GSM 850		Left cheek	0.243	0.435	0.838	1.516								
G3W 630		Left tilt	0.149	0.531	0.410	1.090								
	Body-	Front	0.483	0.342	0.299	1.124								
	Worn	Back	0.560	0.292	0.783	1.635								

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(VV/Kg)			SAR Test
GSM 850	Right cheek	0.360	4.76	5.34	-0.16	1.694	93.7	0.024	SPLSR≤ 0.04.
WLAN Main	Night Cheek	1.334	1.84	-3.56	-0.08	1.094	93.1	0.024	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 119 of 347

Conditions	Position	SAR Value	e ΣSAR Lo		Peak Location Separation Distance	SPLSR	Simultaneous Transmission		
		(W/kg)	х	у	Z	(vv/kg)	(mm)		SAR Test
GSM 850	Pight cheek	0.360	4.76	5.34	-0.16	0.575	77 5	0.006	SPLSR≤ 0.04,
WLAN Aux	Right cheek -	0.215	-1.28	0.56	0.63	0.575	77.5	0.006	Not required



Conditions	Position	SAR Value	Coo	Coordinates (cm)			Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	z	(W/kg)	(mm)		SAR Test
WLAN Main	Right cheek	1.334	1.84	-3.56	-0.08	1.549	52.2	0.037	SPLSR≤ 0.04.
WLAN Aux	Night Cheek	0.215	-1.28	0.56	0.63	1.549	32.2	0.037	Not required

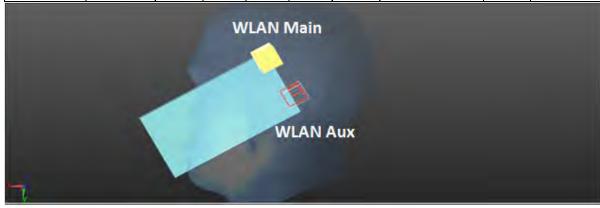

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 120 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(VV/Kg)	(mm)		SAR Test
GSM 850	Right tilt	0.190	2.96	1.54	-0.30	1.422	42.4	0.040	SPLSR≤ 0.04.
WLAN Main	ixigiit tiit	1.232	1.94	-2.58	-0.18	1.422	42.4	0.040	Not required



Conditions	Position	SAR Value (W/kg)	/alue		ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission SAR Test	
			Х	У	Z		(mm)		
GSM 850	- Right tilt	0.190	2.96	1.54	-0.30	0.378	54.8	0.004	SPLSR≤ 0.04,
WLAN Aux	Night the	0.188	-1.50	-0.43	2.21	0.376	34.0	0.004	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 121 of 347

Conditions	Position	SAR Value	Coo	Coordinates (cm)		ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(W/Kg)	(mm)		SAR Test
WLAN Main	Right tilt	1.232	1.94	-2.58	-0.18	1.42	47	0.036	SPLSR≤ 0.04.
WLAN Aux	ixigiit tiit	0.188	-1.50	-0.43	2.21	1.42	47	0.030	Not required



Conditions	Conditions Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	z	·	(mm)		SAR Test
GSM 850	Back side	0.560	3.50	6.35	3.11	0.952	159.0	0.005	SPLSR≤ 0.04,
WLAN Main		0.292	-3.60	-7.50	-0.10	0.032	0.852 158.9		Not required

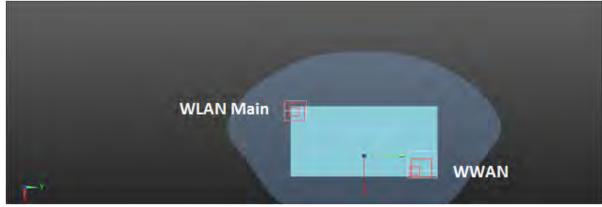

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 122 of 347

Conditions	Position	SAR Value	Coo	Coordinates (cm)			Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)		x	У	z	(W/kg)	(mm)		SAR Test
GSM 850	Dook aida	0.560	3.50	6.35	3.11	1.343	128.9	0.012	SPLSR≤
WLAN Aux	Dack Side	Back side 0.783		-6.14	-0.06	1.343	120.9	0.012	0.04, Not required

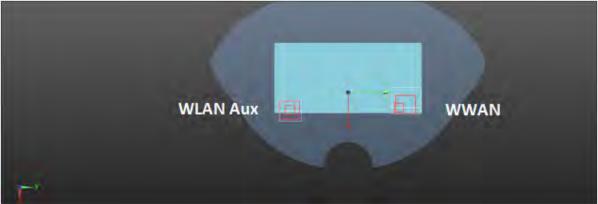

Conditions Position	SAR Value	Coo	Coordinates (cm)			Peak Location Separation Distance	SPLSR	Simultaneous Transmission	
	(W/kg)		х	у	z	(W/kg)	(mm)		SAR Test
WLAN Main	Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤ 0.04,
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	1.075	74.7	0.015	Not required

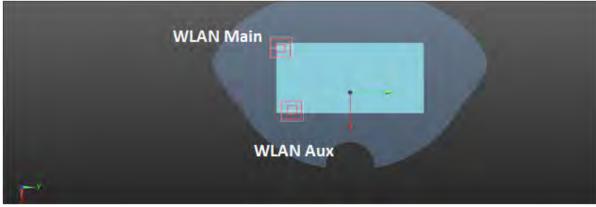

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 123 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation												
Frequency	D	osition	rep	orted SAR / W	//kg	ΣSAR							
band	P	OSILION	WWAN	WLAN Main	WLAN Aux	<1.6W/kg							
	Head	Right cheek	0.397	1.334	0.215	1.946							
		Right tilt	0.087	1.232	0.188	1.507							
GSM 1900	Heau	Left cheek	0.199	0.435	0.838	1.472							
GSW 1900		Left tilt	0.104	0.531	0.410	1.045							
	Hotspot	Front	0.522	0.342	0.299	1.163							
		Back	0.602	0.292	0.783	1.677							

Conditions Position		SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)		х	у	z	(vv/kg)	(mm)		SAR Test
GSM 1900	Right cheek	0.397	4.83	6.46	0.01	1.731	104.6	0.022	SPLSR≤ 0.04.
WLAN Main	Trigin cheek	1.334	1.84	-3.56	-0.08	1.731	104.0	0.022	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 124 of 347

Conditions Position	SAR Value	lue		nates (cm) ΣSAR (W/kg)		· · · · · · · · · · · · · · · · · · ·		Simultaneous Transmission			
	(W/kg		x	у	z	(VV/Kg)	(mm)		SAR Test		
GSM 1900	Diabt about	0.397	4.83	6.46	0.01	0.612	95.2	0.006	SPLSR≤		
WLAN Aux	Right cheek	0.215	-1.28	0.56	0.63	0.612	85.2	0.006	0.04, Not required		

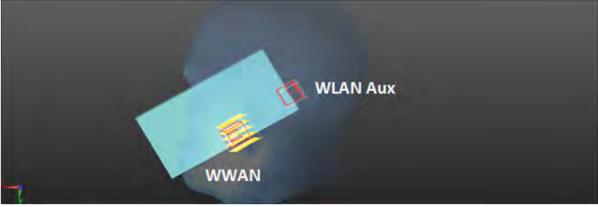

Conditions Position		SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)		х	у	z	(vv/kg)	(mm)		SAR Test
WLAN Main	Dight shock	1.334	1.84	-3.56	-0.08	1.549	52.2	0.037	SPLSR≤
WLAN Aux	Right cheek 0.215		-1.28	0.56	0.63	1.549	52.2	0.037	0.04, Not required

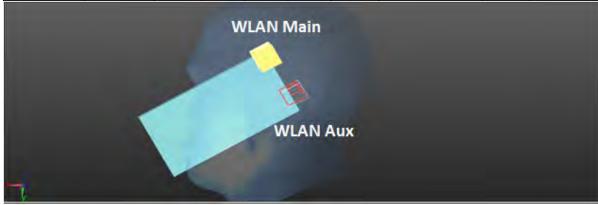

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 125 of 347

Conditions Posit	Position		Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)		х	У	z	(W/Kg)	(mm)		SAR Test
GSM 1900	Pack side	0.602	2.56	6.94	-0.08	0.894	157	0.005	SPLSR≤
WLAN Main	Back side 0.292		-3.60	-7.50	-0.10	0.094	137	0.005	0.04, Not required

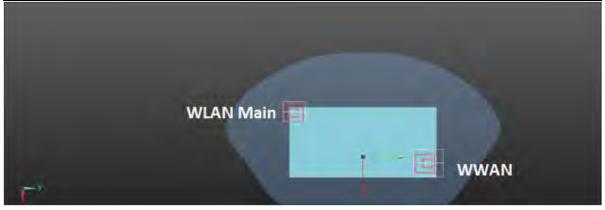

Conditions Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission	
	(W/kg		x	у	z		(VV/Ng)		SAR Test
GSM 1900	Pook oido	0.602	2.56	6.94	-0.08	1.385	131.3	0.012	SPLSR≤
WLAN Aux	Back side 0.783		3.74	-6.14	-0.06	1.363	131.3	0.012	0.04, Not required

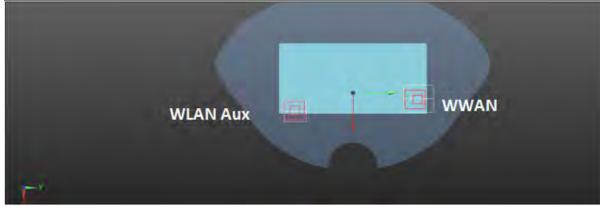

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents at www.sgs.com/terms_and_conditions for Electronic Pocuments at www.sgs.com/terms_and_conditions.htm and for electronic pocuments at www.sgs.com/terms_and_conditions.htm and for electronic pocuments at www.sgs.com/terms_and_conditions.htm and for electronic pocuments at www.sgs.com/terms_and_conditions.htm

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 126 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg		Х	У	z	(vv/kg)	(mm)		SAR Test
WLAN Main	Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤ 0.04,
WLAN Aux	Dack side	0.783	3.74	-6.14	-0.06	1.073	74.7	0.013	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 127 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation												
Frequency	Frequency Position reported SAR / W/kg ΣSAI												
band	P	osition	WWAN	WLAN Main	WLAN Aux	<1.6W/kg							
	Right cheek	0.701	1.334	0.215	2.250								
	Llaad	Right tilt	0.165	1.232	0.188	1.585							
WCDMA	Head	Left cheek	0.340	0.435	0.838	1.613							
Band II		Left tilt	0.187	0.531	0.410	1.128							
	Body- Worn	Front	0.899	0.342	0.299	1.540							
		Back	1.041	0.292	0.783	2.116							

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)		x	У	z	(vv/kg)	(mm)		SAR Test
WCDMA Band II	Right cheek	0.701	4.77	6.24	-0.03	2.035	102.4	0.028	SPLSR≤
WLAN Main	Right cheek	1.334	1.84	-3.56	-0.05	2.033	102.4	0.026	0.04, Not required

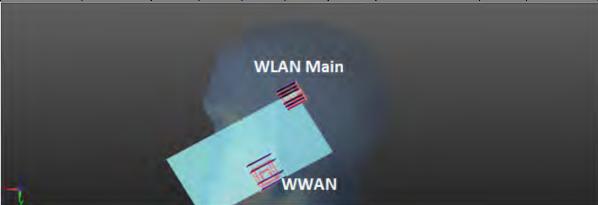

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.




Page: 128 of 347

Conditions Position	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)		х	у	z	(vv/kg)	(mm)		SAR Test
WCDMA Band II	Right cheek	0.701	4.77	6.24	-0.03	0.916	92.4	0.011	SPLSR≤
WLAN Aux	Trigiti Cheek	0.215	-1.28	0.56	0.63	0.910	83.4	0.011	0.04, Not required

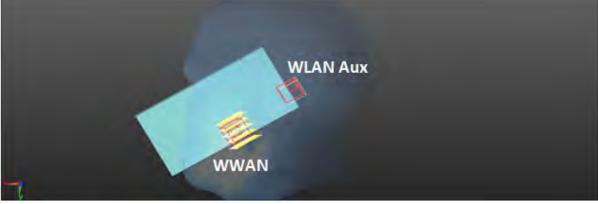

Conditions		Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
		(W/kg)	x	у	z	(W/Kg)			
WLAN Main	Right cheek	1.334	1.84	-3.56	-0.08	1.549	52.2	0.037	SPLSR≤
WLAN Aux	Right Cheek	0.215	-1.28	0.56	0.63	1.549	32.2	0.037	0.04, Not required

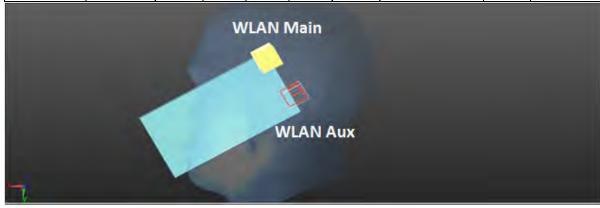

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 129 of 347

(Conditions		SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			(W/kg)	х	У	z	(W/Kg)	(mm)		SAR Test
	WCDMA Band II	Left cheek	0.340	5.94	-0.65	-0.08	0.775	75.4	0.009	SPLSR≤
V	VLAN Main	Len cheek	0.435	-1.49	-1.90	0.41	0.775	73.4	0.009	0.04, Not required

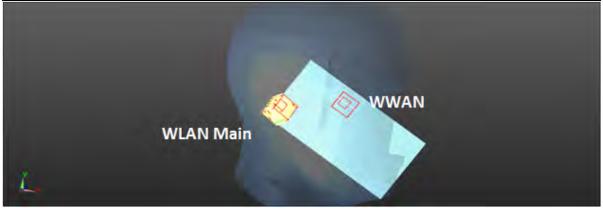

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	z	(vv/kg)	(mm)		SAR Test
WCDMA Band II	Left cheek	0.340	5.94	-0.65	-0.08	1.178	38.2	0.033	SPLSR≤ 0.04,
WLAN Aux	Left Grieek	0.838	3.61	2.38	-0.18	1.170	30.2	0.033	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 130 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(W/Kg)			SAR Test
WLAN Main	Left cheek	0.435	-1.49	-1.90	0.41	1.273	66.8	0.022	SPLSR≤
WLAN Aux	Len cheek	0.838	3.61	2.38	-0.18	1.273	00.0	0.022	0.04, Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Page: 131 of 347

Conditions		SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	z	(vv/kg)	(mm)		SAR Test
WCDMA Band II	Back side	1.041	2.40	7.09	-0.08	1.333	157.8	0.010	SPLSR≤ 0.04.
WLAN Main	Dack Side	0.292	-3.60	-7.50	-0.10	1.333	137.0	0.010	Not required



Conditions			Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(vv/kg)	(mm)		SAR Test
WCDMA Band II	Back side	1.041	2.40	7.09	-0.08	1.824	133	0.019	SPLSR≤
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	1.024	133	0.019	0.04, Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 132 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(W/Kg)			SAR Test
WLAN Main	- Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤
WLAN Aux	Back side	0.783	3.74	-6.14	-0.06	1.075	74.7	0.015	0.04, Not required

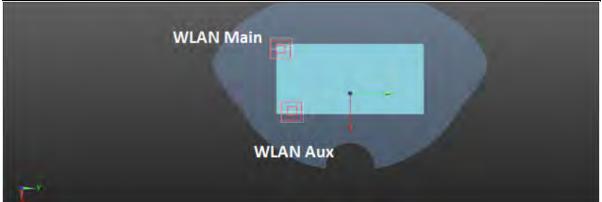

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 133 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation													
Frequency	D/	osition	re	ΣSAR										
band	Р	DSILIOIT	WWAN	WLAN Main	WLAN Aux	<1.6W/kg								
		Right cheek	0.724	1.334	0.215	2.273								
	Head	Right tilt	0.157	1.232	0.188	1.577								
WCDMA	Heau	Left cheek	0.319	0.435	0.838	1.592								
Band IV		Left tilt	0.188	0.531	0.410	1.129								
	Body-	Front	0.866	0.342	0.299	1.507								
	Worn	Back	0.917	0.292	0.783	1.992								

Conditions			Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(vv/kg)	(mm)		SAR Test
WCDMA Band IV	Right cheek	0.724	4.85	6.12	-0.04	2.058	101.4	0.029	SPLSR≤ 0.04.
WLAN Main	Trigin Cheek	1.334	1.84	-3.56	-0.08	2.030	101.4	0.029	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 134 of 347

Conditions	Conditions Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	z	(vv/kg)	(mm)		SAR Test
WCDMA Band IV	Right cheek	0.724	4.85	6.12	-0.04	0.939	83.1	0.011	SPLSR≤
WLAN Aux	Right cheek	0.215	-1.28	0.56	0.63	0.939	65.1	0.011	0.04, Not required

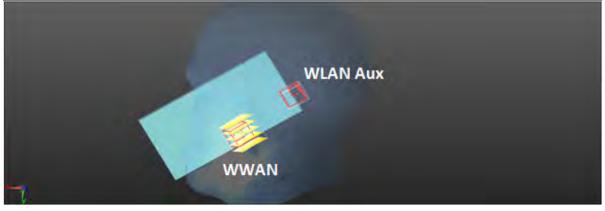

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	у	Z	(Tring)	(mm)		SAR Test
WLAN Main	Right cheek	1.334	1.84	-3.56	-0.08	1.549	52.2	0.037	SPLSR≤
WLAN Aux	Trigin Cheek	0.215	-1.28	0.56	0.63	1.549	J2.2	0.037	0.04, Not required

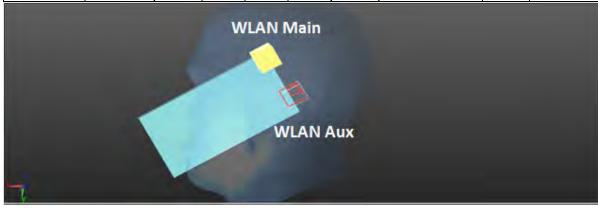

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 135 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	Z	(vv/kg)	(mm)		SAR Test
WCDMA Band IV	Back side	0.917	2.70	6.84	-0.09	1.209	156.6	0.008	SPLSR≤ 0.04,
WLAN Main	Dack Side	0.292	-3.60	-7.50	-0.10	1.209	130.0	0.000	Not required
			4						

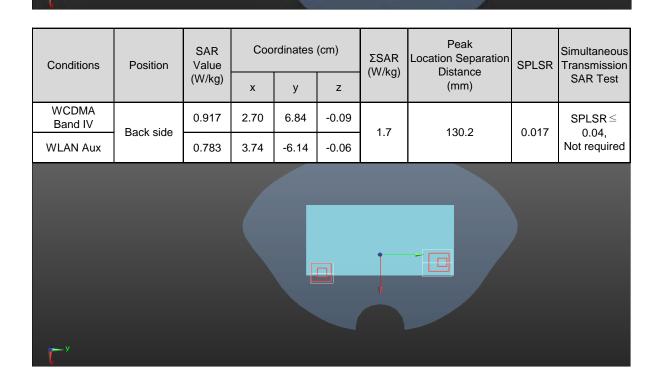

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 136 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	Х	у	Z	(vv/kg)	(mm)		SAR Test
WLAN Main	Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤ 0.04,
WLAN Aux	Dack side	0.783	3.74	-6.14	-0.06	1.073	74.7	0.013	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 137 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation													
Frequency	D/	osition	re	reported SAR / W/kg										
band	۲	DSILIOIT	WWAN	WLAN Main	WLAN Aux	<1.6W/kg								
	Head - Body- Worn	Right cheek	0.360	1.334	0.215	1.909								
		Right tilt	0.181	1.232	0.188	1.601								
WCDMA		Left cheek	0.231	0.435	0.838	1.504								
Band V		Left tilt	0.132	0.531	0.410	1.073								
		Front	0.638	0.342	0.299	1.279								
		Back	0.511	0.292	0.783	1.586								

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	z	(W/Kg)	(mm)		SAR Test
WCDMA Band V	Right cheek	0.360	4.90	5.42	-0.14	1.694	94.9	0.023	SPLSR≤ 0.04,
WLAN Main	Night Cheek	1.334	1.84	-3.56	-0.08	1.094	94.9	0.023	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 138 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	у	z	(W/Ng)	(mm)		SAR Test
WCDMA Band V	Right cheek	0.360	4.90	5.42	-0.14	0.575	79	0.006	SPLSR≤ 0.04,
WLAN Aux	Night Cheek	0.215	-1.28	0.56	0.63	0.575	79	0.000	Not required

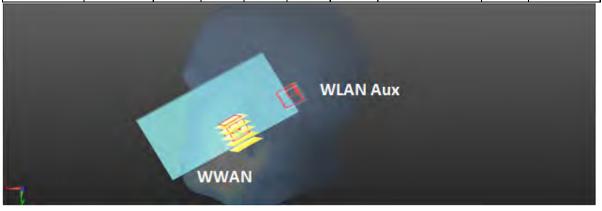

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission
		(W/kg)	x	у	Z				SAR Test
WLAN Main	Right cheek	1.334	1.84	-3.56	-0.08	1.549	52.2	0.037	SPLSR≤
WLAN Aux	Night cheek	0.215	-1.28	0.56	0.63	1.549	J2.2	0.037	0.04, Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 139 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			х	У	z	(VV/Kg)	(mm)		SAR Test
WCDMA Band V	- Right tilt	0.181	2.96	1.54	-0.29	1.413	42.4	0.040	SPLSR≤ 0.04.
WLAN Main	1 Night tilt	1.232	1.94	-2.58	-0.18	1.413	42.4	0.040	Not required

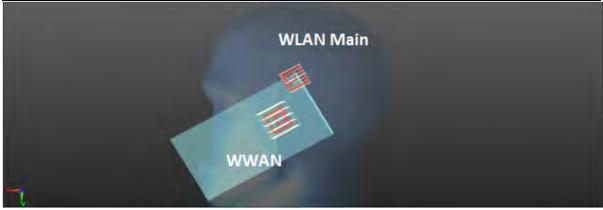

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	z	(vv/kg)	(mm)		SAR Test
WCDMA Band V	Dight tilt	0.181	2.96	1.54	-0.29	0.369	54.8	0.004	SPLSR≤ 0.04,
WLAN Aux	WLAN Aux Right tilt		-1.50	-0.43	2.21	0.309	54.8	0.004	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 140 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	z		(mm)		SAR Test
WLAN Main	Right tilt	1.232	1.94	-2.58	-0.18	1.42	47	0.036	SPLSR≤ 0.04,
WLAN Aux	ixigiit tiit	0.188	-1.50	-0.43	2.21	1.42	47	0.030	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 141 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation												
Frequency	Do	sition	rep	orted SAR / W	//kg	ΣSAR							
band	-	Silion	WWAN	WLAN Main	WLAN Aux	<1.6W/kg							
LTE FDD	Body-	Front	0.928	0.342	0.299	1.569							
Band II	Worn	Back	0.888	0.292	0.783	1.963							

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)	x	у	z	(W/Kg)	(mm)		SAR Test	
LTE FDD Band II	Back side	0.888	2.25	6.94	-0.06	1.180	155.8	0.008	SPLSR≤ 0.04,
WLAN Main	Dack Side	0.292	-3.60	-7.50	-0.10	1.100	133.0	0.008	Not required

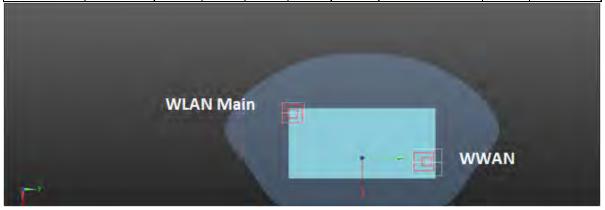

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 142 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
	(W/kg)	x	У	z	(W/Kg)	(mm)		SAR Test	
LTE FDD Bar	nd Back side	0.888	2.25	6.94	-0.06	1.671	131.5	0.016	SPLSR≤
WLAN Aux		0.783	3.74	-6.14	-0.06	1.071	131.3	0.010	0.04, Not required

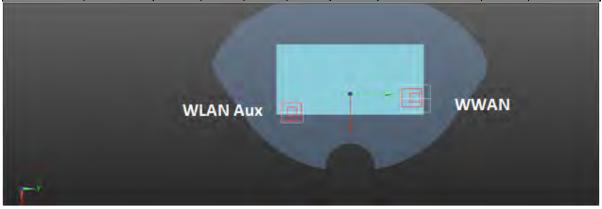

Conditions	Position	SAR Value			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission	
		(W/kg)	х	У	z	(vv/kg)	(mm)		SAR Test
WLAN Main	Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤ 0.04,
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	1.073	14.7	0.013	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 143 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation									
Frequency band	Do	sition	rep	ΣSAR						
		Sition	WWAN	WLAN Main	WLAN Aux	<1.6W/kg				
LTE FDD	LTE FDD Body-		0.806	0.342	0.299	1.447				
Band IV	Worn	Back	1.025	0.292	0.783	2.100				

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			х	у	z		(mm)		SAR Test
LTE FDD Band IV	Back side	1.025	3.16	6.69	-0.07	1.317	157.2	0.010	SPLSR≤ 0.04,
WLAN Main		0.292	-3.60	-7.50	-0.10				Not required

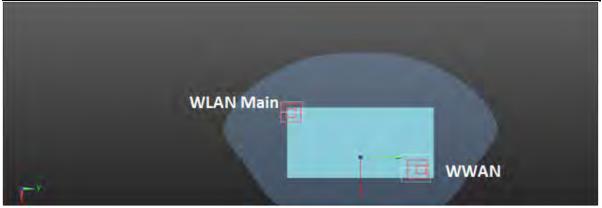

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 144 of 347

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			x	У	z	(VV/Kg)	(mm)		SAR Test
LTE FDD Band IV	Back side	1.025	3.16	6.69	-0.07	1.808	128.4	0.019	SPLSR ≤ 0.04, Not required
WLAN Aux		0.783	3.74	-6.14	-0.06				

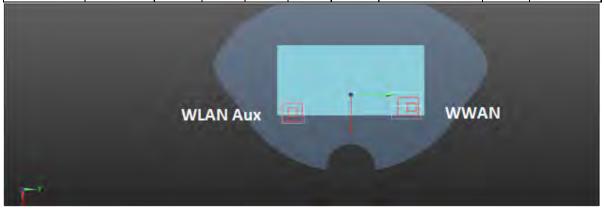

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			х	У	z	(W/kg)	(mm)		SAR Test
WLAN Main	Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤ 0.04.
WLAN Aux		0.783	3.74	-6.14	-0.06				Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 145 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation																			
Frequency	Do	scition	rep	orted SAR / W	//kg	ΣSAR														
band	Position		WWAN	WLAN Main	WLAN Aux	<1.6W/kg														
LTE FDD	Body-	Front	0.650	0.342	0.299	1.291														
Band V	Worn	Worn	Worn	Worn						Worn		Worn	-	-	•	Back	0.517	0.292	0.783	1.592
LTE FDD	Body-	Front	1.045	0.342	0.299	1.686														
Band VII	Worn	Worn	Back	0.820	0.292	0.783	1.895													

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	z	(vv/kg)	(mm)		SAR Test
LTE FDD Band VII	Front side	1.045	3.02	6.60	-0.08	1.387	139.8	0.012	SPLSR≤ 0.04,
WLAN Main	i ioni side	0.342	4.02	-7.34	-0.06	1.307	139.0	0.012	Not required

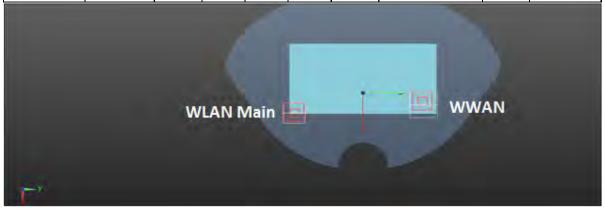

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 146 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	z	(vv/kg)	(mm)		SAR Test
LTE FDD Band VII	Front side	1.045	3.02	6.60	-0.08	1.344	139.4	0.011	SPLSR≤ 0.04,
WLAN Aux	1 TOTIL SIGE	0.299	-3.50	-5.72	-0.08	1.544	139.4	0.011	Not required

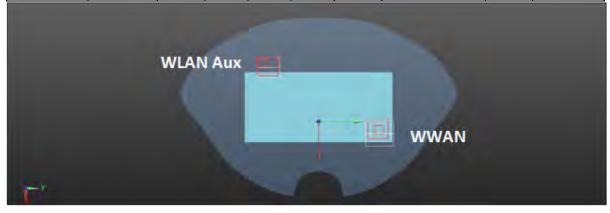

Conditions	Position	SAR Value (W/kg)	Coo	rdinates	inates (cm) ΣSA (W/H		Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
			^		. , -		(******)		
WLAN Main	Front side	0.342	4.02	-7.34	-0.06	0.641	76.9	0.007	SPLSR≤ 0.04,
WLAN Aux			-3.50	-5.72	-0.08	0.041	70.9	0.007	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 147 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(vv/kg)	(mm)		SAR Test
LTE FDD Band VII	Back side	0.820	-2.98	6.24	-0.07	1.112	137.5	0.009	SPLSR≤ 0.04,
WLAN Main	Dack side	0.292	-3.60	-7.50	-0.10	1.112	137.3	0.009	Not required

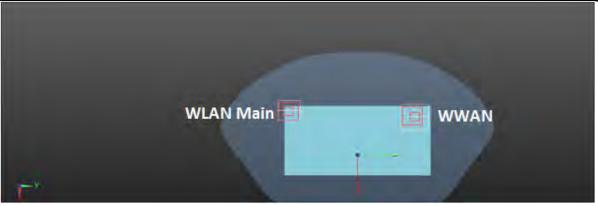

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(vv/kg)	(mm)		SAR Test
LTE FDD Band VII	Back side	0.820	-2.98	6.24	-0.07	1.603	140.9	0.014	SPLSR≤ 0.04,
WLAN Aux	Dack side	0.783	3.74	-6.14	-0.06	1.003	140.9	0.014	Not required

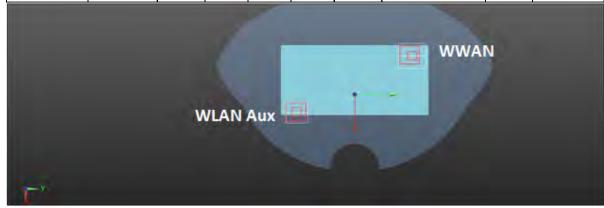

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and/conditions for Electronic Documents at www.sgs.com/terms_and/conditions for Electronic Documents at www.sgs.com/terms_and/conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined.


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 148 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission SAR Test
		(W/kg)	Х	У	z		(mm)		
WLAN Main	Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤ 0.04,
WLAN Aux	Dack side	0.783	3.74	-6.14	-0.06	1.073	74.7	0.013	Not required

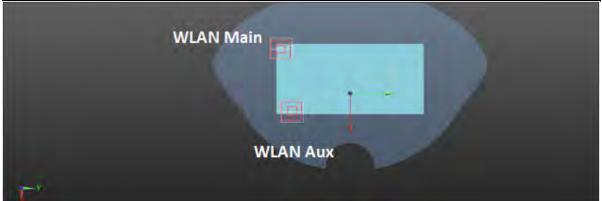

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 149 of 347

	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation												
Frequency	De	sition	rep	orted SAR / W	//kg	ΣSAR							
band	P	Sition	WWAN	WLAN Main	WLAN Aux	<1.6W/kg							
LTE FDD	Body-	Front	0.187	0.342	0.299	0.828							
Band XII	Worn	Back	0.137	0.292	0.783	1.212							
LTE FDD	Body-	Front	0.189	0.342	0.299	0.830							
Band XVII	Worn	Back	0.102	0.292	0.783	1.177							
LTE FDD	Body-	Front	0.789	0.342	0.299	1.430							
Band XXX	Worn	Back	0.773	0.292	0.783	1.848							

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission SAR Test
		(W/kg)	x	У	z		(mm)		
_TE FDD Band XXX	Back side	0.773	-3.56	6.34	-0.11	1.065	138.4	0.008	SPLSR<0.04,
WLAN Main	Dack Side	0.292	-3.60	-7.50	-0.10	1.003	130.4	0.000	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 150 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	у	z	(W/Kg)	(mm)		SAR Test
LTE FDD Band XXX	Back side	0.773	-3.56	6.34	-0.11	1.556	144.6	0.013	SPLSR<0.04,
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	1.550	144.0	0.013	Not required

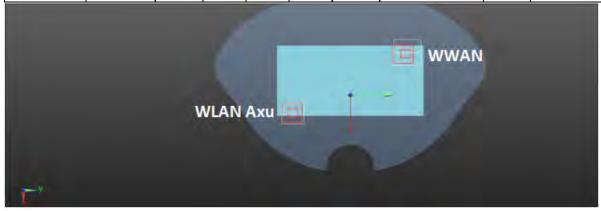

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	Z	(*****9)	(mm)		SAR Test
WLAN Main	Back side	0.292	-3.60	-7.50	-0.10	1.075	74.7	0.015	SPLSR≤ 0.04.
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	1.073	74.7	0.013	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 151 of 347

reported S	AR WWAN	and Blueto	ooth and 2.	4G WLAN	Aux, ΣSAR	evaluation
Frequency			repo	rted SAR / \	W/kg	ΣSAR
band	Pos	ition	WWAN	Bluetooth	WLAN Aux	<1.6W/kg
GSM 850	Body-	Front	0.483	0.008	0.162	0.653
GSIVI 650	Worn	Back	0.560	0.019	0.271	0.850
GSM	Body-	Front	0.522	0.008	0.162	0.692
1900	Worn	Back	0.602	0.019	0.271	0.892
WCDMA	Body-	Front	0.899	0.008	0.162	1.069
Band II	Worn	Back	1.041	0.019	0.271	1.331
WCDMA	Body-	Front	0.866	0.008	0.162	1.036
Band IV	Worn	Back	0.917	0.019	0.271	1.207
WCDMA	Doay	Front	0.638	0.008	0.162	0.808
Band V	Worn	Back	0.511	0.019	0.271	0.801
LTE FDD	DD Body-	Front	0.928	0.008	0.162	1.098
Band II	Worn	Back	0.888	0.019	0.271	1.178
LTE FDD	Body-	Front	0.806	0.008	0.162	0.976
Band IV	Worn	Back	1.025	0.019	0.271	1.315
LTE FDD	Body-	Front	0.650	0.008	0.162	0.82
Band V	Worn	Back	0.517	0.019	0.271	0.807
LTE FDD	Body-	Front	1.045	0.008	0.162	1.215
Band VII	Worn	Back	0.820	0.019	0.271	1.110
LTE FDD	Body-	Front	0.187	0.008	0.162	0.357
Band XII	Worn	Back	0.137	0.019	0.271	0.427
LTE FDD	Body-	Front	0.189	0.008	0.162	0.359
Band XVII	Worn	Back	0.102	0.019	0.271	0.392
LTE FDD	Body-	Front	0.789	0.008	0.162	0.959
Band XXX	Worn	Back	0.773	0.019	0.271	1.063

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 152 of 347

reported	reported SAR WWAN and Bluetooth and 5G WLAN Aux, ΣSAR evaluation											
Frequency			repo	rted SAR / \	W/kg	ΣSAR						
band	Pos	ition	WWAN	Bluetooth	WLAN Aux	<1.6W/kg						
GSM 850	Body- Worn Body-	Front	0.483	0.005	0.299	0.787						
G3W 650		Back	0.560	0.012	0.783	1.355						
GSM		Front	0.522	0.005	0.299	0.826						
1900	Worn	Back	0.602	0.012	0.783	1.397						
WCDMA	Body- Worn	Front	0.899	0.005	0.299	1.203						
Band II		Back	1.041	0.012	0.783	1.836						

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(vv/kg)	(mm)		SAR Test
WCDMA Band	Back side	1.041	2.40	7.09	-0.08	1.052	150.0	0.007	SPLSR≤
Bluetooth		0.012	-3.30	-6.88	-0.08	1.053	150.9	0.007	0.04, Not required

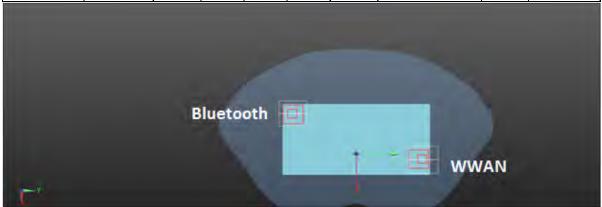

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 153 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	Z	(vv/kg)	(mm)		SAR Test
WCDMA Band II	Back side	1.041	2.40	7.09	-0.08	1.824	133	0.019	SPLSR≤ 0.04,
WLAN Aux		0.783	3.74	-6.14	-0.06	1.024	133	0.019	Not required

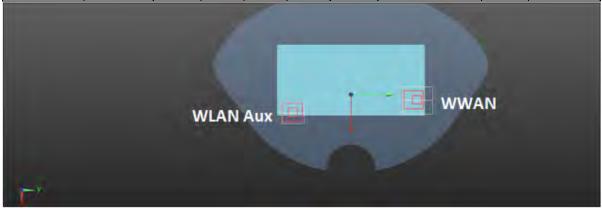

	Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			(W/kg)	x	У	z	(vv/kg)	(mm)		SAR Test
	Bluetooth	Back side	0.012	-3.30	-6.88	-0.08	0.795	70.8	0.010	SPLSR≤ 0.04.
	WLAN Aux		0.783	3.74	-6.14	-0.06	0.793	70.8	0.010	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 154 of 347

reported	reported SAR WWAN and Bluetooth and 5G WLAN Aux, ΣSAR evaluation											
Frequency			reported SAR / W/kg ΣSAR									
band	Pos	ition	WWAN	Bluetooth	WLAN Aux	<1.6W/kg						
WCDMA	Body-	Front	0.866	0.005	0.299	1.17						
Band IV	Worn	Back	0.917	0.012	0.783	1.712						
	Body-	Front	0.638	0.005	0.299	0.942						
	Worn	Back	0.511	0.012	0.783	1.306						

Conditions	Position	SAR Value (W/kg)	Coo	rdinates v	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
WCDMA Band		0.047		,			, ,		
IV	Back side	0.917	2.70	6.84	-0.09	0.929	149.7	0.006	SPLSR≤ 0.04,
Bluetooth		0.012	-3.30	-6.88	-0.08	3.320		3.300	Not required

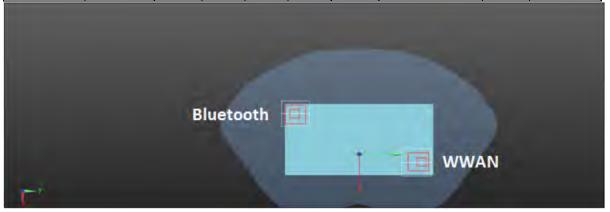

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 155 of 347

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission	
		(W/kg)	х	у	z	(vv/kg)	(mm)		SAR Test	
WCDMA Band IV	Back side	0.917	2.70	6.84	-0.09	1.7	130.2	0.017	SPLSR≤ 0.04,	
WLAN Aux	Dack side	0.783	3.74	-6.14	-0.06	1.7	130.2	0.017	Not required	
WLAN Aux 0.783 3.74 -6.14 -0.06 Not required										
Ţ,										

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			х	У	z	(W/Kg)	(mm)		SAR Test
Bluetooth	- Back side -	0.012	-3.30	-6.88	-0.08	0.795	70.8	0.010	SPLSR≤
WLAN Aux		0.783	3.74	-6.14	-0.06	0.795	70.0	0.010	0.04, Not required

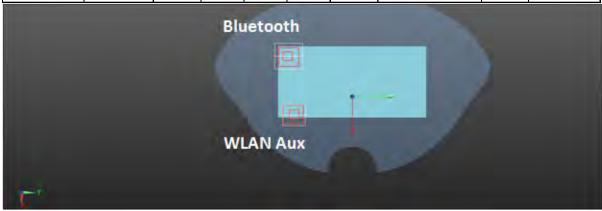

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 156 of 347

reported	reported SAR WWAN and Bluetooth and 5G WLAN Aux, ΣSAR evaluation										
Frequency	_		reported SAR / W/kg ΣSAR								
band	Pos	ition	WWAN	Bluetooth	WLAN Aux	<1.6W/kg					
LTE FDD	LTE FDD Body-		0.928	0.005	0.299	1.232					
Band II	Worn	Back	0.888	0.012	0.783	1.683					

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			x	У	z	(vv/kg)	(mm)		SAR Test
LTE FDD Band II	· Back side	0.888	2.25	6.94	-0.06	0.900	149.0	0.006	SPLSR≤
Bluetooth		0.012	-3.30	-6.88	-0.08	0.900	148.9	0.000	0.04, Not required

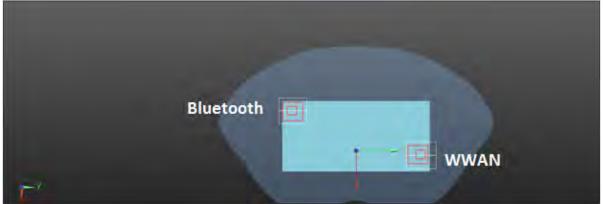

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488

SGS Taiwan Ltd.




Page: 157 of 347

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
			x	У	z	(vv/kg)	(mm)		SAR Test
LTE FDD Band II	- Back side -	0.888	2.25	6.94	-0.06	1.671	121 5	0.016	SPLSR≤
WLAN Aux		0.783	3.74	-6.14	-0.06	1.071	131.5	0.016	0.04, Not required

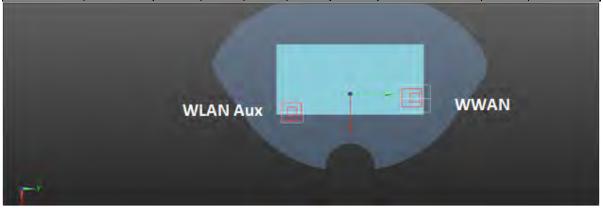

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	z	(W/kg)	(mm)		SAR Test
Bluetooth	Back side	0.012	-3.30	-6.88	-0.08	0.795	70.8	0.010	SPLSR≤ 0.04,
WLAN Aux		0.783	3.74	-6.14	-0.06	0.793	70.0	0.010	Not required

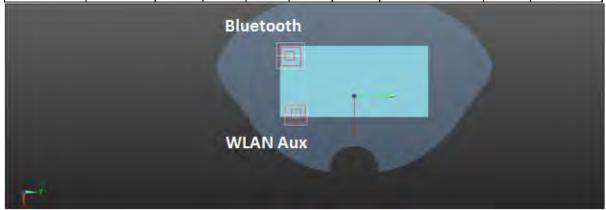

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 158 of 347

reported SAR WWAN and Bluetooth and 5G WLAN Aux, ΣSAR evaluation									
Frequency			repo	reported SAR / W/kg ΣSAR					
band			WWAN	Bluetooth	WLAN Aux	<1.6W/kg			
LTE FDD	Body-	Front	0.806	0.005	0.299	1.11			
Band IV	Worn	Back	1.025	0.012	0.783	1.82			

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission SAR Test
		(W/kg)	х	У	z	(vv/kg)	(mm)		
LTE FDD Band IV	Back side	1.025	3.16	6.69	-0.07	1.037	150.3	0.007	SPLSR≤ 0.04,
Bluetooth	Dack side	0.012	-3.30	-6.88	-0.08	1.037	150.5	0.007	Not required

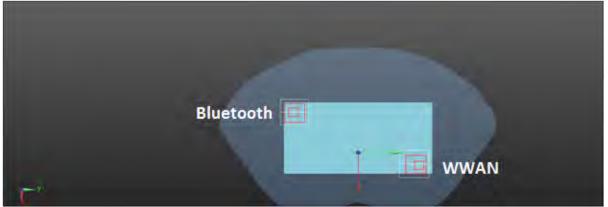

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 159 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission SAR Test
		(W/kg)	x	У	z	(W/Kg)	(mm)		
LTE FDD Band IV	Back side	1.025	3.16	6.69	-0.07	1.808	128.4	0.019	SPLSR≤ 0.04,
WLAN Aux	Dack side	0.783	3.74	-6.14	-0.06	1.000	120.4	0.019	Not required

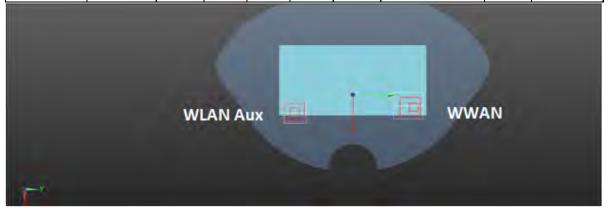

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission	
		(W/kg) x y		У	z	(VV/Kg)	(mm)		SAR Test	
Bluetooth	Back side	0.012	-3.30	-6.88	-0.08	0.795	70.8	0.010	SPLSR≤ 0.04.	
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	0.793	70.0	0.010	Not required	

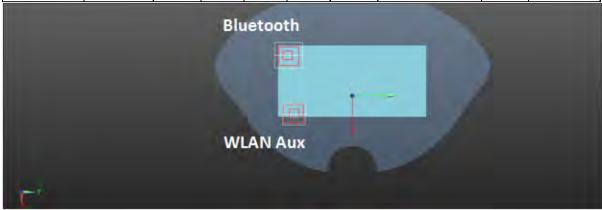

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 160 of 347

reported \$	reported SAR WWAN and Bluetooth and 5G WLAN Aux, ΣSAR evaluation										
Frequency	_		repo	rted SAR / \	W/kg	ΣSAR					
band	Pos	ition	WWAN	Bluetooth	WLAN Aux	<1.6W/kg					
LTE FDD	Body-	Front	0.650	0.005	0.299	0.954					
Band V V	Worn	Back	0.517	0.012	0.783	1.312					
LTE FDD	Body-	Front	1.045	0.005	0.299	1.349					
Band VII	Worn	Back	0.820	0.012	0.783	1.615					
LTE FDD	Body-	Front	0.187	0.005	0.299	0.491					
Band XII	Worn	Back	0.137	0.012	0.783	0.932					
LTE FDD	Body-	Front	0.189	0.005	0.299	0.493					
Band XVII	Worn	Back	0.102	0.012	0.783	0.897					
LTE FDD	Body-	Front	0.789	0.005	0.299	1.093					
Band XXX	Worn	Back	0.773	0.012	0.783	1.568					

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission SAR Test
		(W/kg)	x	У	z	(vv/kg)	(mm)		
LTE FDD Band VII	Back side	0.820	-2.98	6.24	-0.07	0.832	131.2	0.006	SPLSR≤ 0.04.
Bluetooth	Dack side	0.012	-3.30	-6.88	-0.08	0.832	131.2	0.000	Not required

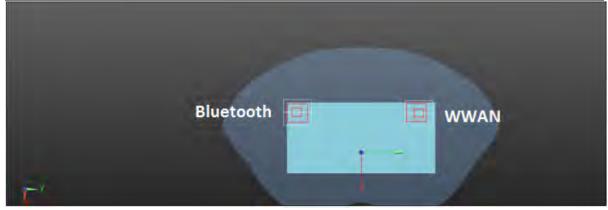

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 161 of 347

Conditions	Position	SAR Value	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission
		(W/kg)		У	z	(VV/Kg)	(mm)		SAR Test
LTE FDD Band VII	Back side	0.820	-2.98	6.24	-0.07	1.603	140.9	0.014	SPLSR≤
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	1.003	140.9	0.014	0.04, Not required

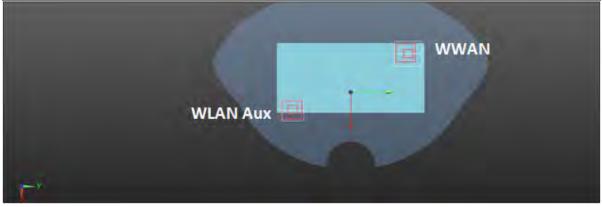

Conditions	Position	SAR Value (W/kg)	Coo	rdinates	(cm)	ΣSAR (W/kg)	Peak Location Separation Distance	SPLSR	Simultaneous Transmission SAR Test
		(w/kg)	Х	У	Z		(mm)		OAR TOST
Bluetooth	Back side	0.012	-3.30	-6.88	-0.08	0.795	70.8	0.010	SPLSR≤
WLAN Aux	Dack Side	0.783	3.74	-6.14	-0.06	0.795	70.0	0.010	0.04, Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 162 of 347

4. Instruments List

. IIISti dilicii	to List			I _	_
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner	Dosimetric E-Field	EX3DV4	7346	Sep.02,2015	Sep.01,2016
Engineering AG	Probe		3770	Apr.27,2016	Apr.26,2017
		D750V3	1015	Aug.24,2015	Aug.23,2016
	System Validation	D835V2	4d063	Aug.24,2015	Aug.23,2016
Schmid &		D1750V2	1008	Aug.20,2015	Aug.19,2016
Partner		D1900V2	5d027	Apr.25,2016	Apr.24,2017
Engineering	Dipole	D2300V2	1023	Aug.19,2015	Aug.18,2016
AG		D2450V2	727	Apr.19,2016	Apr.18,2017
		D2600V2	1005	Jan.21,2016	Jan.20,2017
		D5GHzV2	1023	Jan.26,2016	Jan.25,2017
Schmid & Partner	Data acquisition	DAE4	916	Dec.16,2015	Dec.15,2016
Engineering AG	Electronics	D/ (L 1	856	Apr.21,2016	Apr.20,2017
Schmid & Partner Engineering AG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration not required	Calibration not required
Network Analyzer	Agilent	E5071C	MY46107530	Jan.07,2016	Jan.06,2017
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilont	Dual-directional	772D	MY46151242	Jul.15,2015	Jul.14,2016
Agilent	coupler	778D	MY48220468	Jul.16,2015	Jul.15,2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 163 of 347

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Agilent	RF Signal Generator	N5181A	MY50145142	Feb.19,2016	Feb.18,2017
Agilent	Power Meter	E4417A	MY52240003	Jul.15,2015	Jul.14,2016
Agilent	Power Sensor	E9301H	MY52200004	Jul.15,2015	Jul.14,2016
TECPEL	Digital thermometer	DTM-303A	TP130073	Feb.26,2016	Feb.25,2017
Anritsu	Radio Communication Test	MT8820C	6201061014	Oct.07,2015	Oct.06,2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 164 of 347

5. Measurements

Date: 2016/5/8

GSM 850_Head_Re Cheek_CH 190

Communication System: GSM; Frequency: 836.6 MHz

Medium parameters used: f = 837 MHz; $\sigma = 0.923$ S/m; $\varepsilon_r = 40.865$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/09/02;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn916; Calibrated: 2015/12/16

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR = 0.288 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 6.238 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.175 W/kg

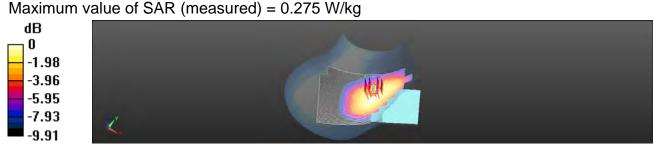

0 dB = 0.275 W/kg = -5.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 165 of 347

Date: 2016/5/3

GSM 850 Speech mode Front side CH 190 10mm

Communication System: GSM; Frequency: 836.6 MHz

Medium parameters used: f = 837 MHz; $\sigma = 1.018 \text{ S/m}$; $\epsilon_r = 55.733$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.477 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 13.79 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.450 W/kg

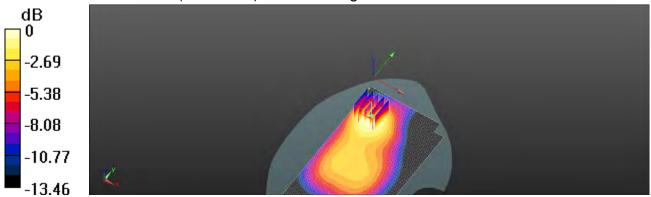

0 dB = 0.450 W/kg = -3.47 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 166 of 347

Date: 2016/5/3

GPRS 850 Hotspot Front side CH 251 10mm

Communication System: GPRS (1Dn4Up); Frequency: 848.8 MHz

Medium parameters used: f = 849 MHz; $\sigma = 1.032$ S/m; $\varepsilon_r = 55.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.646 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 16.67 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

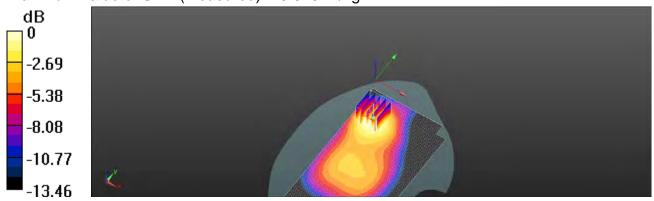

0 dB = 0.619 W/kg = -2.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 167 of 347

Date: 2016/5/2

GSM 1900 Head Re Cheek CH 810

Communication System: GSM; Frequency: 1909.8 MHz

Medium parameters used: f = 1910 MHz; $\sigma = 1.423 \text{ S/m}$; $\varepsilon_r = 38.896$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/09/02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR = 0.464 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 5.029 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.213 W/kg Maximum value of SAR (measured) = 0.412 W/kg



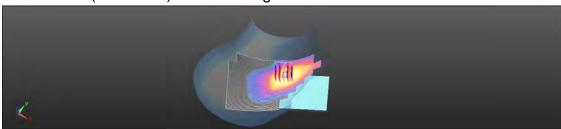

0 dB = 0.412 W/kg = -3.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 168 of 347

Date: 2016/4/27

GSM 1900_Speech mode_Back side_CH 810_10mm

Communication System: GSM; Frequency: 1909.8 MHz

Medium parameters used: f = 1910 MHz; $\sigma = 1.577 \text{ S/m}$; $\epsilon_r = 53.683$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.697 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 9.932 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.651 W/kg

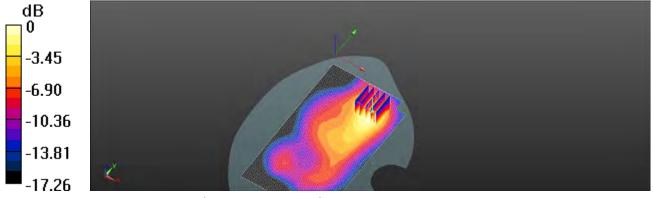

0 dB = 0.651 W/kg = -1.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 169 of 347

Date: 2016/4/27

GPRS 1900 Hotspot Back side CH 810 10mm

Communication System: GPRS (1Dn3Up); Frequency: 1909.8 MHz

Medium parameters used: f = 1910 MHz; $\sigma = 1.577 \text{ S/m}$; $\epsilon_r = 53.683$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.812 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm, dz=5mm

Reference Value = 11.35 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.791 W/kg

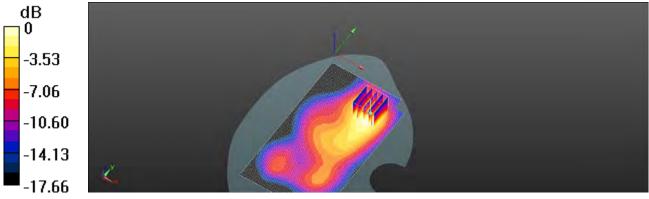

0 dB = 0.791 W/kg = -1.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 170 of 347

Date: 2016/5/2

WCDMA Band 2_Head_Re Cheek_CH 9538

Communication System: WCDMA; Frequency: 1907.6 MHz

Medium parameters used: f = 1908 MHz; $\sigma = 1.422$ S/m; $\varepsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/09/02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR = 0.862 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 6.358 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.389 W/kg Maximum value of SAR (measured) = 0.786 W/kg



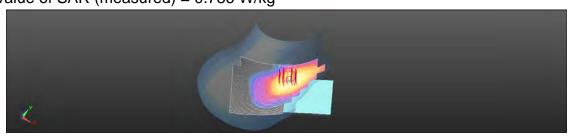

0 dB = 0.786 W/kg = -1.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 171 of 347

Date: 2016/4/27

WCDMA Band 2 Hotspot Back side CH 9538 10mm

Communication System: WCDMA; Frequency: 1907.6 MHz

Medium parameters used: f = 1908 MHz; $\sigma = 1.572$ S/m; $\varepsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 1.33 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 15.39 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.533 W/ka

Maximum value of SAR (measured) = 1.26 W/kg

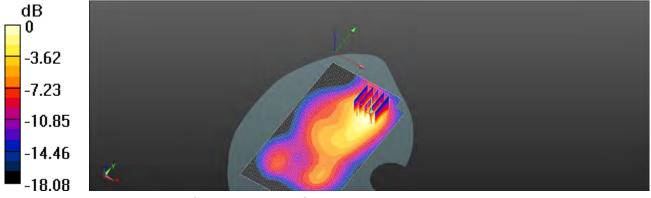

0 dB = 1.26 W/kg = 1.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 172 of 347

Date: 2016/5/7

WCDMA Band 4 Head Re Cheek CH 1513

Communication System: WCDMA; Frequency: 1752.6 MHz

Medium parameters used: f = 1753 MHz; $\sigma = 1.379$ S/m; $\varepsilon_r = 39.265$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.6, 8.6, 8.6); Calibrated: 2015/09/02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR = 0.863 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 5.719 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.909 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.391 W/kgMaximum value of SAR (measured) = 0.759 W/kg



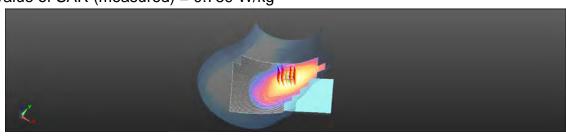

0 dB = 0.759 W/kg = -1.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 173 of 347

Date: 2016/4/28

WCDMA Band 4_Hotspot_Back side_CH 1312_10mm

Communication System: WCDMA; Frequency: 1712.4 MHz

Medium parameters used: f = 1712.4 MHz; $\sigma = 1.404 \text{ S/m}$; $\varepsilon_r = 54.263$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 14.27 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.488 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

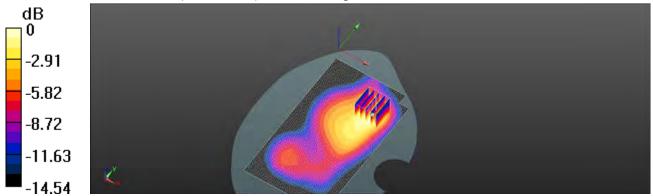

0 dB = 1.06 W/kg = 0.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 174 of 347

Date: 2016/5/8

WCDMA Band 5 Head Re Cheek CH 4132

Communication System: WCDMA; Frequency: 826.4 MHz

Medium parameters used: f = 826 MHz; $\sigma = 0.917 \text{ S/m}$; $\varepsilon_r = 40.912$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/09/02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR = 0.382 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 6.809 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.228 W/kgMaximum value of SAR (measured) = 0.364 W/kg



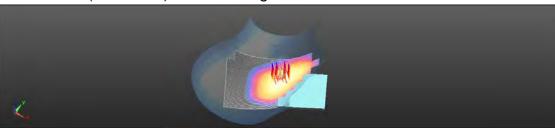

0 dB = 0.364 W/kg = -4.39 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 175 of 347

Date: 2016/5/3

WCDMA Band 5 Hotspot Front side CH 4233 10mm

Communication System: WCDMA; Frequency: 846.6 MHz

Medium parameters used: f = 847 MHz; $\sigma = 1.03 \text{ S/m}$; $\epsilon_r = 55.653$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.739 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 17.16 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 0.708 W/kg

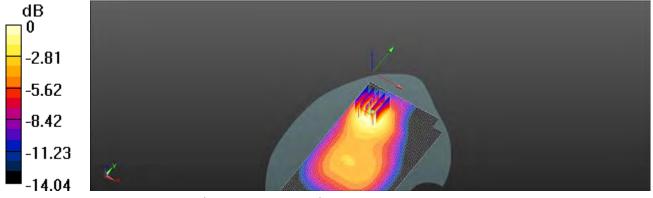

0 dB = 0.708 W/kg = -1.50 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 176 of 347

Date: 2016/4/27

LTE Band 2 (20MHz)_Hotspot_Front side_CH 19100 QPSK 1-0 10mm 10mm

Communication System: LTE; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.559 \text{ S/m}$; $\varepsilon_r = 53.728$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn916; Calibrated: 2015/12/16

· Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.23 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 13.41 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.488 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

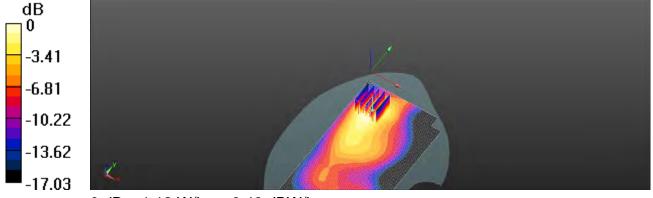

0 dB = 1.12 W/kg = 0.49 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 177 of 347

Date: 2016/4/28

LTE Band 4 (20MHz) Hotspot Back side CH 20050 QPSK 1-0 10mm

Communication System: LTE; Frequency: 1720 MHz

Medium parameters used: f = 1720 MHz; $\sigma = 1.413 \text{ S/m}$; $\varepsilon_r = 54.257$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 1.27 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.542 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

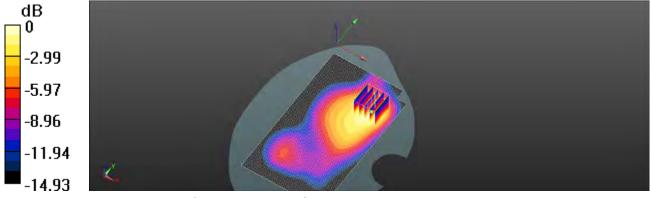

0 dB = 1.23 W/kg = 0.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 178 of 347

Date: 2016/5/3

LTE Band 5 (10MHz) Hotspot Front side CH 20600 QPSK 1-0 10mm

Communication System: LTE; Frequency: 844 MHz

Medium parameters used: f = 844 MHz; $\sigma = 1.027$ S/m; $\varepsilon_r = 55.712$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (81x141x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.630 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 16.04 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.612 W/kg

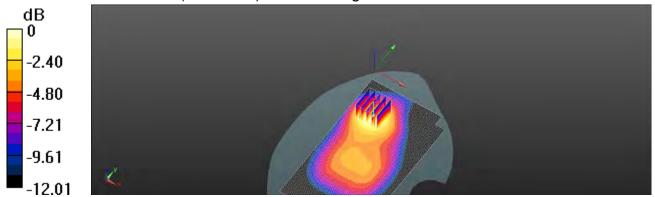

0 dB = 0.612 W/kg = -2.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 179 of 347

Date: 2016/4/29

LTE Band 7 (20MHz) Hotspot Front side CH 20850 QPSK 1-0 10mm

Communication System: LTE; Frequency: 2510 MHz

Medium parameters used: f = 2510 MHz; $\sigma = 2.123 \text{ S/m}$; $\varepsilon_r = 52.002$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x161x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 1.48 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 11.43 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.521 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

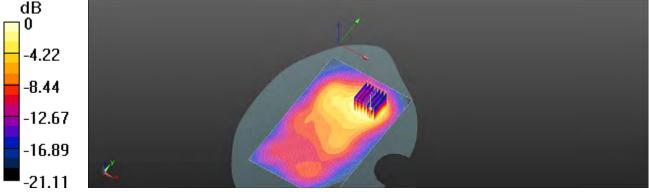

0 dB = 1.37 W/kg = 1.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 180 of 347

Date: 2016/5/4

LTE Band 12 (10MHz)_Hotspot_Bottom side_CH 23130_QPSK_1-49_10mm

Communication System: LTE; Frequency: 711 MHz

Medium parameters used: f = 711 MHz; $\sigma = 0.934$ S/m; $\varepsilon_r = 56.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (41x81x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.318 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.335 W/kg

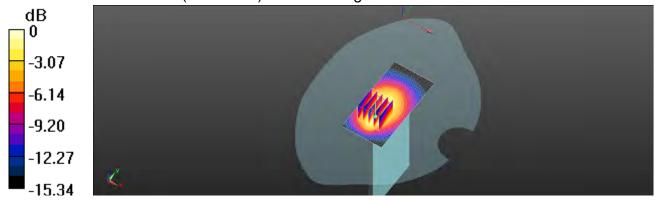

0 dB = 0.335 W/kg = -4.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 181 of 347

Date: 2016/5/4

LTE Band 17 (10MHz)_Hotspot_Bottom side_CH 23790_QPSK_1-49_10mm

Communication System: LTE; Frequency: 710 MHz

Medium parameters used: f = 710 MHz; $\sigma = 0.932 \text{ S/m}$; $\varepsilon_r = 56.926$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (41x81x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.314 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 15.38 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

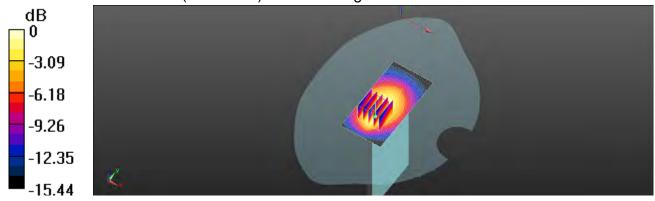

0 dB = 0.316 W/kg = -5.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 182 of 347

Date: 2016/4/30

LTE Band 30 (10MHz)_Hotspot_Front side_CH 27710_QPSK_1-0_10mm

Communication System: LTE; Frequency: 2310 MHz

Medium parameters used: f = 2310 MHz; $\sigma = 1.861 \text{ S/m}$; $\varepsilon_r = 52.476$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(7.57, 7.57, 7.57); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.980 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 9.677 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.333 W/kg Maximum value of SAR (measured) = 0.939 W/kg

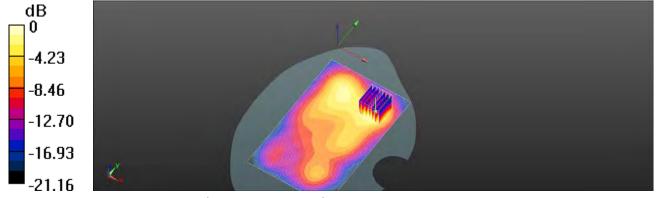

0 dB = 0.939 W/kg = -0.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 183 of 347

Date: 2016/5/9

WLAN 802.11b Head Re Cheek CH 6 Main

Communication System: WLAN 2.45G; Frequency: 2437 MHz

Medium parameters used: f = 2437 MHz; $\sigma = 1.871$ S/m; $\varepsilon_r = 38.142$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.12, 7.12, 7.12); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 1.34 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 8.824 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.411 W/ka

Maximum value of SAR (measured) = 1.21 W/kg

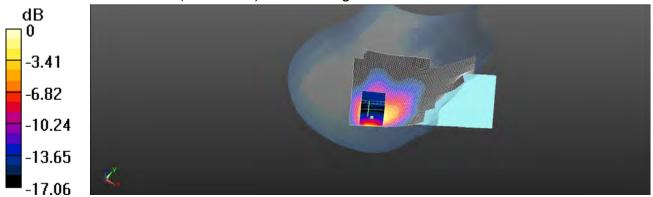

0 dB = 1.21 W/kg = 0.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 184 of 347

Date: 2016/5/9

WLAN 802.11b_Hotspot_Back side_CH 6_Main_10mm

Communication System: WLAN 2.45G; Frequency: 2437 MHz

Medium parameters used: f = 2437 MHz; $\sigma = 1.984 \text{ S/m}$; $\varepsilon_r = 52.859$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.37, 7.37, 7.37); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.497 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 5.064 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.466 W/kg

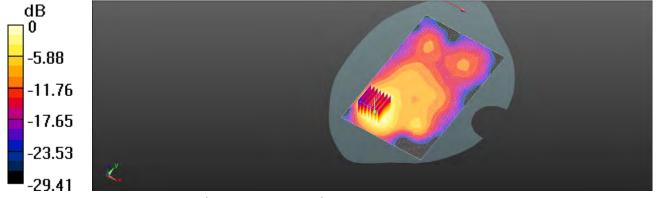

0 dB = 0.466 W/kg = -3.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 185 of 347

Date: 2016/5/9

WLAN 802.11b Head Le Cheek CH 11 Aux

Communication System: WLAN 2.45G; Frequency: 2462 MHz

Medium parameters used: f = 2462 MHz; $\sigma = 1.898 \text{ S/m}$; $\varepsilon_r = 38.041$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.12, 7.12, 7.12); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.627 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 4.358 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

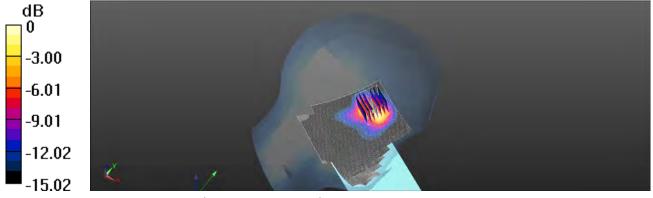

0 dB = 0.658 W/kg = -1.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 186 of 347

Date: 2016/5/9

WLAN 802.11b_Hotspot_Back side_CH 11_Aux_10mm

Communication System: WLAN 2.45G; Frequency: 2462 MHz

Medium parameters used: f = 2462 MHz; $\sigma = 2.021 \text{ S/m}$; $\varepsilon_r = 52.777$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.37, 7.37, 7.37); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.420 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 2.957 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

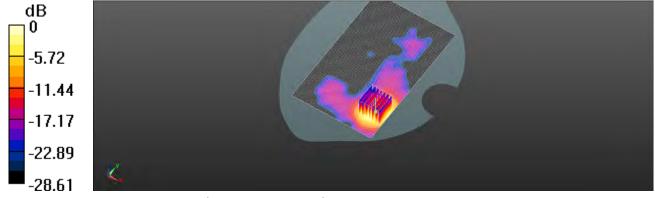

0 dB = 0.377 W/kg = -4.24 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 187 of 347

Date: 2016/5/10

WLAN 802.11a 5.2G Head Re Cheek CH 36 Main

Communication System: WLAN 5G; Frequency: 5180 MHz

Medium parameters used: f = 5180 MHz; $\sigma = 4.622 \text{ S/m}$; $\varepsilon_r = 36.486$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.61 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 9.672 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.94 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.482 W/kgMaximum value of SAR (measured) = 2.41 W/kg

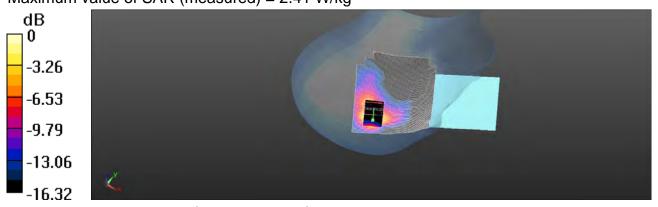

0 dB = 2.41 W/kg = 3.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 188 of 347

Date: 2016/5/10

WLAN802.11 n(20M) 5.2G_Head_Re Cheek_CH 44_Main

Communication System: WLAN 5G; Frequency: 5220 MHz

Medium parameters used: f = 5220 MHz; $\sigma = 4.669 \text{ S/m}$; $\varepsilon_r = 36.361$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.81 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 8.685 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.25 W/kg

SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 1.97 W/kg

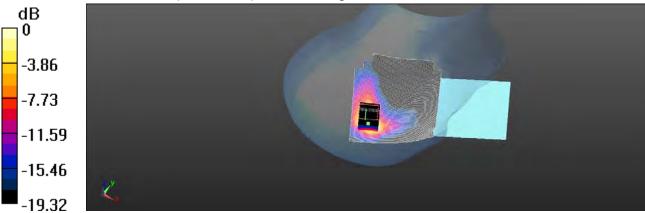

0 dB = 1.97 W/kg = 2.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 189 of 347

Date: 2016/5/10

WLAN 802.11n(40M) 5.2G_Head_Re Cheek_CH 46_Main

Communication System: WLAN 5G; Frequency: 5230 MHz

Medium parameters used: f = 5230 MHz; $\sigma = 4.689 \text{ S/m}$; $\varepsilon_r = 36.342$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.50 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 9.108 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.71 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.440 W/kg Maximum value of SAR (measured) = 2.28 W/kg

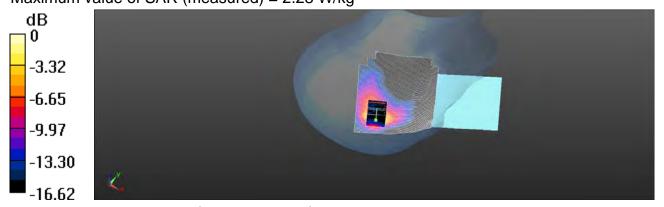

0 dB = 2.28 W/kg = 3.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 190 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.2G_Body-worn_Front side_CH 38_Main_10mm

Communication System: WLAN 5G; Frequency: 5190 MHz

Medium parameters used: f = 5190 MHz; $\sigma = 5.447 \text{ S/m}$; $\varepsilon_r = 47.987$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.466 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 1.970 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.470 W/kg

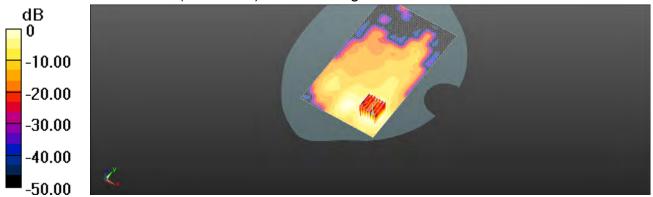

0 dB = 0.470 W/kg = -3.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com



Page: 191 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.2G Hand Front side CH 38 Main 0mm

Communication System: WLAN 5G; Frequency: 5190 MHz

Medium parameters used: f = 5190 MHz; $\sigma = 5.447 \text{ S/m}$; $\varepsilon_r = 47.987$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 6.14 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 6.205 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 2.89 W/kg; SAR(10 g) = 1.1 W/kgMaximum value of SAR (measured) = 5.40 W/kg



0 dB = 5.40 W/kg = 7.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 192 of 347

Date: 2016/5/10

WLAN 802.11n(40M) 5.2G_Head_Le Cheek_CH 38_Aux

Communication System: WLAN 5G; Frequency: 5190 MHz

Medium parameters used: f = 5190 MHz; $\sigma = 4.635 \text{ S/m}$; $\varepsilon_r = 36.433$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.703 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 3.288 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.824 W/kg

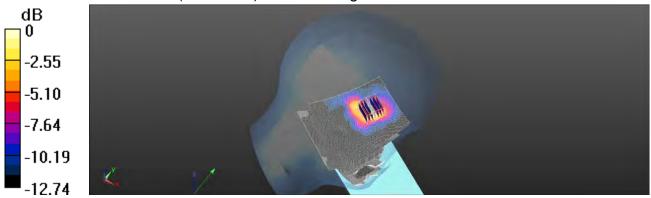

0 dB = 0.824 W/kg = -0.84 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 193 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.2G_Body-worn_Back side_CH 38_Aux_10mm

Communication System: WLAN 5G; Frequency: 5190 MHz

Medium parameters used: f = 5190 MHz; $\sigma = 5.447 \text{ S/m}$; $\varepsilon_r = 47.987$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.556 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 1.417 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.536 W/kg

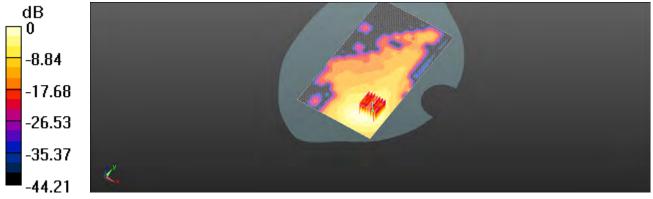

0 dB = 0.536 W/kg = -2.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 194 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.2G Hand Right side CH 38 Aux 0mm

Communication System: WLAN 5G; Frequency: 5190 MHz

Medium parameters used: f = 5190 MHz; $\sigma = 5.447 \text{ S/m}$; $\varepsilon_r = 47.987$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (61x191x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 6.91 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 9.604 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 23.8 W/kg

SAR(1 g) = 3.8 W/kg; SAR(10 g) = 0.807 W/kgMaximum value of SAR (measured) = 8.99 W/kg

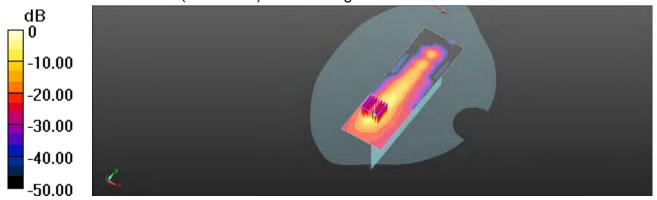

0 dB = 8.99 W/kg = 9.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 195 of 347

Date: 2016/5/10

WLAN802.11 ac(40M) 5.2G_Head_Re Cheek_CH 38_Main

Communication System: WLAN 5G; Frequency: 5190 MHz

Medium parameters used: f = 5190 MHz; $\sigma = 4.635 \text{ S/m}$; $\epsilon_r = 36.433$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.78 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 6.642 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 4.18 W/kg

SAR(1 g) = 0.954 W/kg; SAR(10 g) = 0.308 W/kgMaximum value of SAR (measured) = 1.94 W/kg

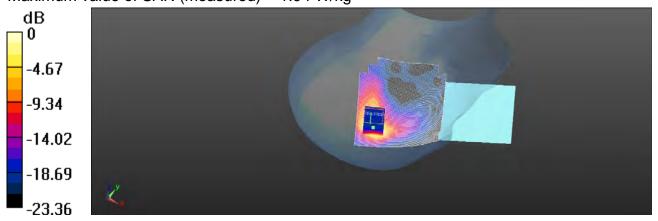

0 dB = 1.94 W/kg = 2.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 196 of 347

Date: 2016/5/11

WLAN 802.11a 5.3G Head Re Cheek CH 52 Main

Communication System: WLAN 5G; Frequency: 5260 MHz

Medium parameters used: f = 5260 MHz; $\sigma = 4.717 \text{ S/m}$; $\varepsilon_r = 36.264$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.43 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 10.17 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 5.07 W/kg

SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.480 W/kg

Maximum value of SAR (measured) = 2.45 W/kg

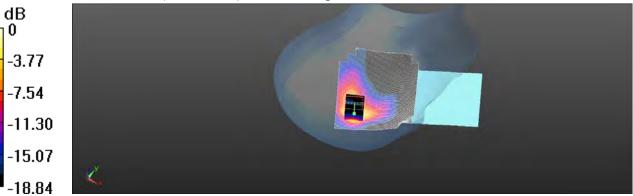

0 dB = 2.45 W/kg = 3.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 197 of 347

Date: 2016/5/11

WLAN802.11 n(20M) 5.3G_Head_Re Cheek_CH 52_Main

Communication System: WLAN 5G; Frequency: 5260 MHz

Medium parameters used: f = 5260 MHz; $\sigma = 4.717 \text{ S/m}$; $\varepsilon_r = 36.264$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.85 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.742 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.35 W/kg

SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 2.02 W/kg

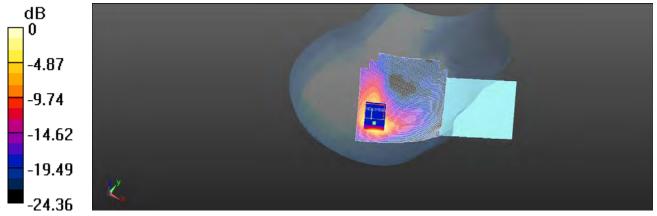

0 dB = 2.02 W/kg = 3.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 198 of 347

Date: 2016/5/11

WLAN 802.11n(40M) 5.3G Head Re Cheek CH 62 Main

Communication System: WLAN 5G; Frequency: 5310 MHz

Medium parameters used: f = 5310 MHz; $\sigma = 4.788 \text{ S/m}$; $\varepsilon_r = 36.106$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x91x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.11 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 10.28 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.21 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.354 W/kgMaximum value of SAR (measured) = 2.04 W/kg



0 dB = 2.04 W/kg = 3.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 199 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.3G_Body-worn_Front side_CH 54_Main_10mm

Communication System: WLAN 5G; Frequency: 5270 MHz

Medium parameters used: f = 5270 MHz; $\sigma = 5.564 \text{ S/m}$; $\epsilon_r = 47.695$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.501 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.825 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.500 W/kg

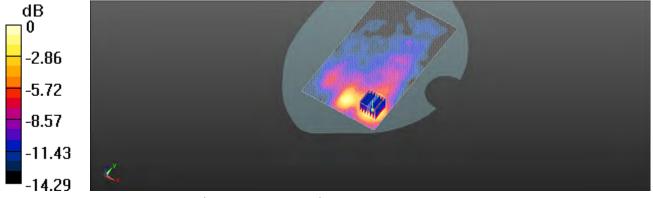

0 dB = 0.500 W/kg = -3.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 200 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.3G_Hand_Front side_CH 54_Main_0mm

Communication System: WLAN 5G; Frequency: 5270 MHz

Medium parameters used: f = 5270 MHz; $\sigma = 5.564 \text{ S/m}$; $\varepsilon_r = 47.698$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 5.89 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 6.841 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 2.8 W/kg; SAR(10 g) = 1.08 W/kg

Maximum value of SAR (measured) = 5.19 W/kg

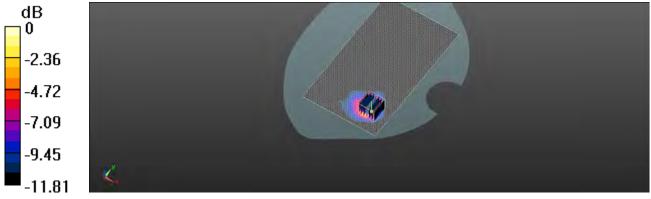

0 dB = 5.19 W/kg = 7.15 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 201 of 347

Date: 2016/5/11

WLAN 802.11n(40M) 5.3G_Head_Le Cheek_CH 62_Aux

Communication System: WLAN 5G; Frequency: 5310 MHz

Medium parameters used: f = 5310 MHz; $\sigma = 4.788 \text{ S/m}$; $\varepsilon_r = 36.106$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.463 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

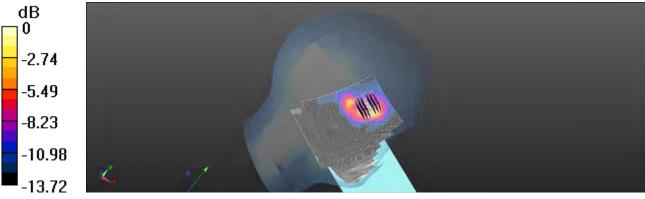

0 dB = 1.22 W/kg = 0.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 202 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.3G_Body-worn_Back side_CH 62_Aux_10mm

Communication System: WLAN 5G; Frequency: 5310 MHz

Medium parameters used: f = 5310 MHz; $\sigma = 5.623 \text{ S/m}$; $\varepsilon_r = 47.554$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 1.697 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

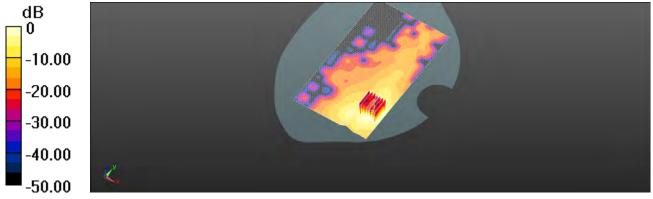

0 dB = 1.02 W/kg = 0.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 203 of 347

Date: 2016/5/5

WLAN 802.11n(40M) 5.3G_Hand_Right side_CH 62_Aux_0mm

Communication System: WLAN 5G; Frequency: 5310 MHz

Medium parameters used: f = 5310 MHz; $\sigma = 5.623 \text{ S/m}$; $\varepsilon_r = 47.554$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (61x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 9.00 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 10.54 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 36.9 W/kg

SAR(1 g) = 5.42 W/kg; SAR(10 g) = 1.07 W/kg

Maximum value of SAR (measured) = 13.1 W/kg

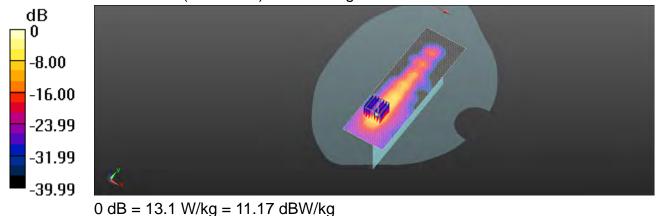

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.ntm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Rc 技股份有限公司 t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 204 of 347

Date: 2016/5/11

WLAN802.11 ac(40M) 5.3G_Head_Re Cheek_CH 62_Main

Communication System: WLAN 5G; Frequency: 5310 MHz

Medium parameters used: f = 5310 MHz; $\sigma = 4.788 \text{ S/m}$; $\epsilon_r = 36.106$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.91 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 8.815 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.49 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.331 W/kgMaximum value of SAR (measured) = 2.08 W/kg

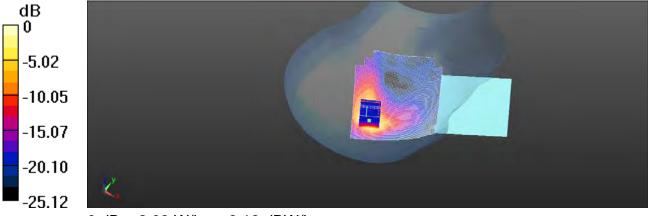

0 dB = 2.08 W/kg = 3.18 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 205 of 347

Date: 2016/5/12

WLAN 802.11a 5.6G_Head_Re Cheek_CH 120_Main

Communication System: WLAN 5G; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz; $\sigma = 5.154 \text{ S/m}$; $\varepsilon_r = 35.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.42, 4.42, 4.42); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.21 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 9.310 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.89 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.382 W/kg Maximum value of SAR (measured) = 2.40 W/kg

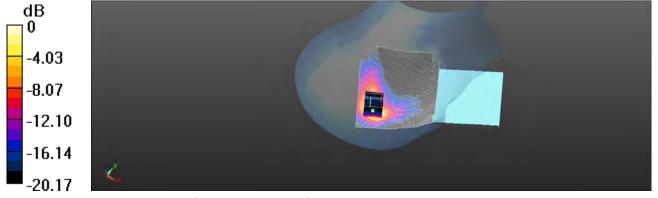

0 dB = 2.40 W/kg = 3.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 206 of 347

Date: 2016/5/6

WLAN 802.11a 5.6G_Body-worn_Front side_CH 100_Main_10mm

Communication System: WLAN 5G; Frequency: 5500 MHz

Medium parameters used: f = 5500 MHz; $\sigma = 5.864 \text{ S/m}$; $\varepsilon_r = 46.91$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.555 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.993 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

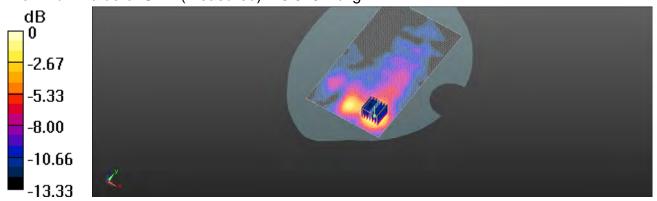

0 dB = 0.515 W/kg = -2.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 207 of 347

Date: 2016/5/6

WLAN 802.11a 5.6G Hand Front side CH 100 Main 0mm

Communication System: WLAN 5G; Frequency: 5500 MHz

Medium parameters used: f = 5500 MHz; $\sigma = 5.864 \text{ S/m}$; $\varepsilon_r = 46.91$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 4.29 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 7.887 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 9.98 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 3.95 W/kg

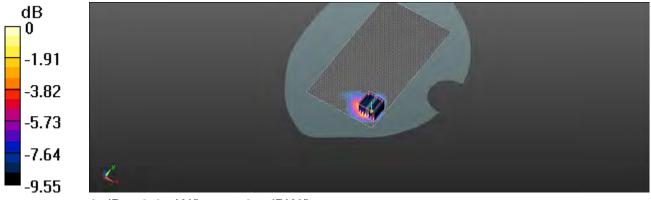

0 dB = 3.95 W/kg = 5.97 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 208 of 347

Date: 2016/5/12

WLAN 802.11a 5.6G_Head_Le Cheek_CH 140_Aux

Communication System: WLAN 5G; Frequency: 5700 MHz

Medium parameters used: f = 5700 MHz; $\sigma = 5.279 \text{ S/m}$; $\varepsilon_r = 34.961$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.42, 4.42, 4.42); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.963 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 4.13 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 1.62 W/kg

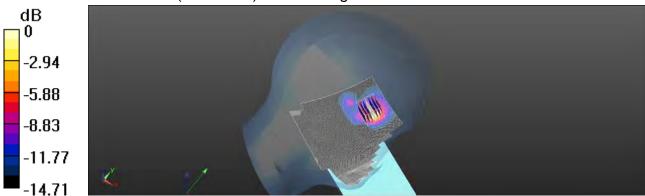

0 dB = 1.62 W/kg = 2.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 209 of 347

Date: 2016/5/6

WLAN 802.11a 5.6G_Body-worn_Back side_CH 140_Aux_10mm

Communication System: WLAN 5G; Frequency: 5700 MHz

Medium parameters used: f = 5700 MHz; $\sigma = 6.058 \text{ S/m}$; $\epsilon_r = 46.301$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.52 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.9680 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

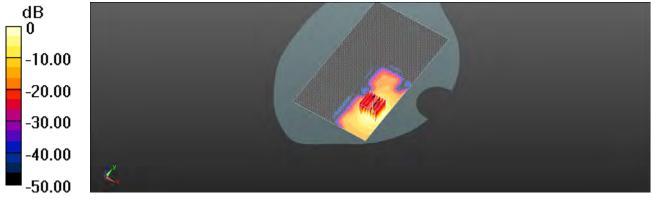

0 dB = 1.44 W/kg = 1.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 210 of 347

Date: 2016/5/6

WLAN 802.11a 5.6G_Hand_Right side_CH 140_Aux_0mm

Communication System: WLAN 5G; Frequency: 5700 MHz

Medium parameters used: f = 5700 MHz; $\sigma = 6.058 \text{ S/m}$; $\varepsilon_r = 46.301$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (61x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 24.0 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 6.196 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 101 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 33.2 W/kg

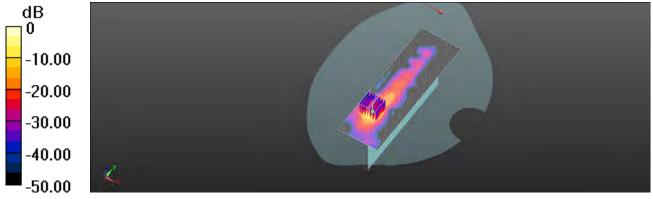

0 dB = 33.2 W/kg = 15.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 211 of 347

Date: 2016/5/12

WLAN802.11 n(20M) 5.6G_Head_Re Cheek CH 100 Main

Communication System: WLAN 5G; Frequency: 5500 MHz

Medium parameters used: f = 5500 MHz; $\sigma = 5.025 \text{ S/m}$; $\varepsilon_r = 35.592$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.42, 4.42, 4.42); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.54 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 7.830 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.269 W/ka

Maximum value of SAR (measured) = 1.68 W/kg

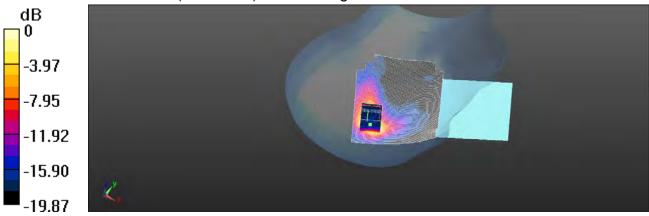

0 dB = 1.68 W/kg = 2.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 212 of 347

Date: 2016/5/12

WLAN 802.11ac(80M) 5.6G_Head_Re Cheek_CH 122_Main

Communication System: WLAN 5G; Frequency: 5610 MHz

Medium parameters used: f = 5610 MHz; $\sigma = 5.159 \text{ S/m}$; $\varepsilon_r = 35.257$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.42, 4.42, 4.42); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.64 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 7.971 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.286 W/ka

Maximum value of SAR (measured) = 1.79 W/kg

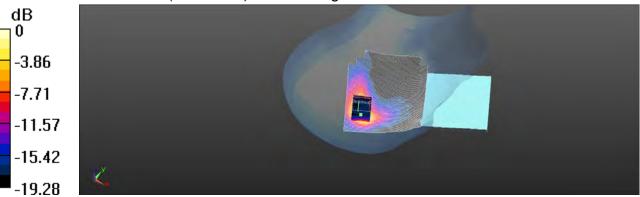

0 dB = 1.79 W/kg = 2.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 213 of 347

Date: 2016/5/6

WLAN 802.11ac(80M) 5.6G_Body-worn_Front side_CH 122_Main_10mm

Communication System: WLAN 5G; Frequency: 5610 MHz

Medium parameters used: f = 5610 MHz; $\sigma = 6.029 \text{ S/m}$; $\varepsilon_r = 46.519$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.406 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.927 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

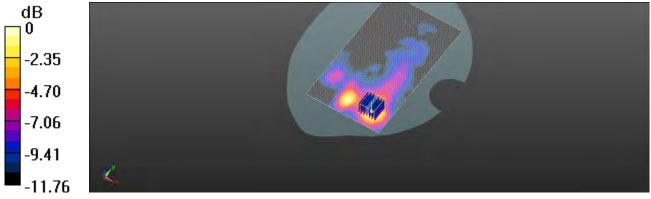

0 dB = 0.393 W/kg = -4.06 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 214 of 347

Date: 2016/5/6

WLAN 802.11ac(80M) 5.6G_Hand_Front side_CH 122_Main_0mm

Communication System: WLAN 5G; Frequency: 5610 MHz

Medium parameters used: f = 5610 MHz; $\sigma = 6.029 \text{ S/m}$; $\varepsilon_r = 46.519$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 3.65 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 8.659 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 1.97 W/kg; SAR(10 g) = 0.993 W/kg Maximum value of SAR (measured) = 3.33 W/kg

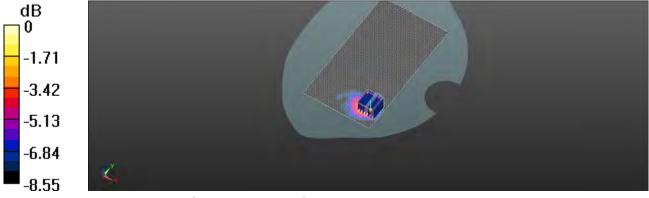

0 dB = 3.33 W/kg = 5.22 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 215 of 347

Date: 2016/5/12

WLAN 802.11ac(80M) 5.6G_Head_Le Cheek_CH 122_Aux

Communication System: WLAN 5G; Frequency: 5610 MHz

Medium parameters used: f = 5610 MHz; $\sigma = 5.159 \text{ S/m}$; $\varepsilon_r = 35.257$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.42, 4.42, 4.42); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.993 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

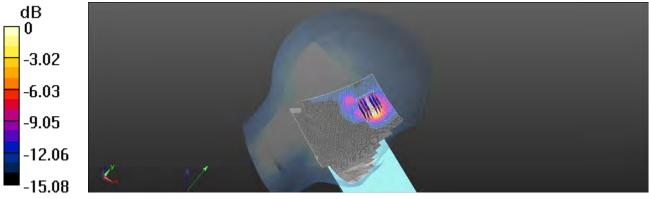

0 dB = 1.49 W/kg = 1.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 216 of 347

Date: 2016/5/6

WLAN 802.11ac(80M) 5.6G_Body-worn_Back side_CH 122_Aux_10mm

Communication System: WLAN 5G; Frequency: 5610 MHz

Medium parameters used: f = 5610 MHz; $\sigma = 6.029 \text{ S/m}$; $\varepsilon_r = 46.519$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.56 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.5370 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

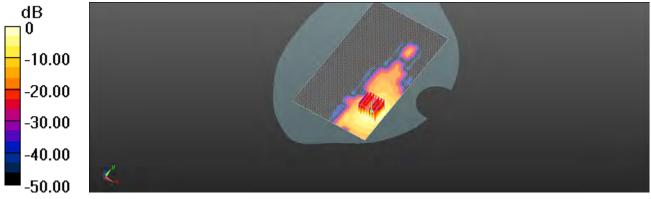

0 dB = 1.49 W/kg = 1.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 217 of 347

Date: 2016/5/6

WLAN 802.11ac(80M) 5.6G_Hand_Right side_CH 138_Aux_0mm

Communication System: WLAN 5G; Frequency: 5690 MHz

Medium parameters used: f = 5690 MHz; $\sigma = 6.029 \text{ S/m}$; $\varepsilon_r = 46.33$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (61x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 22.5 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.891 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 96.8 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 30.7 W/kg

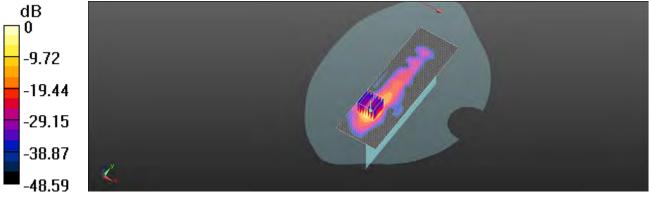

0 dB = 30.7 W/kg = 14.87 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 218 of 347

Date: 2016/5/13

WLAN 802.11a 5.8G_Head_Re Cheek_CH 165_Main

Communication System: WLAN 5G; Frequency: 5825 MHz

Medium parameters used: f = 5825 MHz; $\sigma = 5.424 \text{ S/m}$; $\varepsilon_r = 34.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.83, 4.83, 4.83); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.62 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 7.312 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 4.08 W/kg

SAR(1 g) = 0.916 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

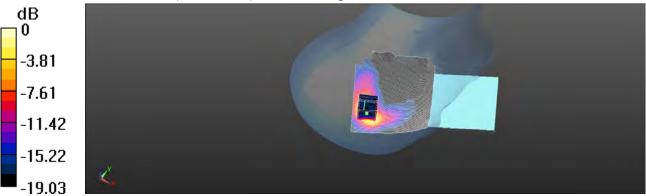

0 dB = 1.83 W/kg = 2.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 219 of 347

Date: 2016/5/6

WLAN 802.11a 5.8G_Body-worn_Front side_CH 165_Main_10mm

Communication System: WLAN 5G; Frequency: 5825 MHz

Medium parameters used: f = 5825 MHz; $\sigma = 6.233 \text{ S/m}$; $\varepsilon_r = 45.885$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.07, 4.07, 4.07); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.383 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.367 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

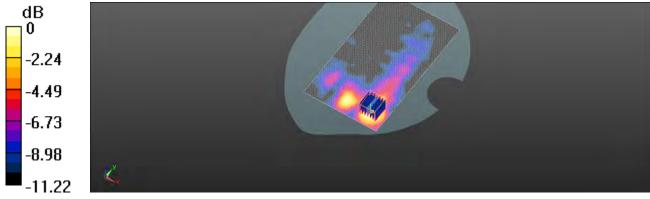

0 dB = 0.363 W/kg = -4.40 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 220 of 347

Date: 2016/5/6

WLAN 802.11a 5.8G_Hand_Front side_CH 165_Main_0mm

Communication System: WLAN 5G; Frequency: 5825 MHz

Medium parameters used: f = 5825 MHz; $\sigma = 6.233 \text{ S/m}$; $\varepsilon_r = 45.885$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.07, 4.07, 4.07); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 4.40 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 6.682 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 2.24 W/kg; SAR(10 g) = 0.906 W/kg

Maximum value of SAR (measured) = 4.16 W/kg

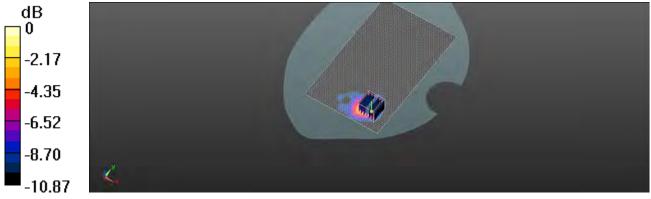

0 dB = 4.16 W/kg = 6.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 221 of 347

Date: 2016/5/13

WLAN 802.11a 5.8G_Head_Le Cheek_CH 149_Aux

Communication System: WLAN 5G; Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz; $\sigma = 5.333 \text{ S/m}$; $\varepsilon_r = 34.855$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.83, 4.83, 4.83); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (121x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.916 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.769 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

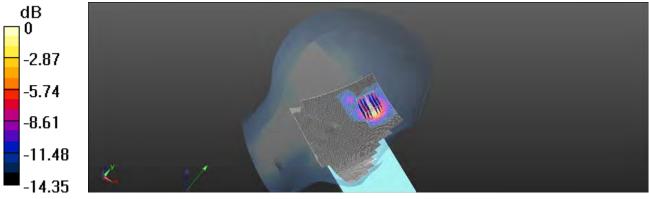

0 dB = 1.20 W/kg = 0.79 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 222 of 347

Date: 2016/5/6

WLAN 802.11a 5.8G_Body-worn_Back side_CH 149_Aux_10mm

Communication System: WLAN 5G; Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz; $\sigma = 6.209 \text{ S/m}$; $\varepsilon_r = 46.141$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.07, 4.07, 4.07); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 0.6170 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.176 W/kg Maximum value of SAR (measured) = 1.08 W/kg

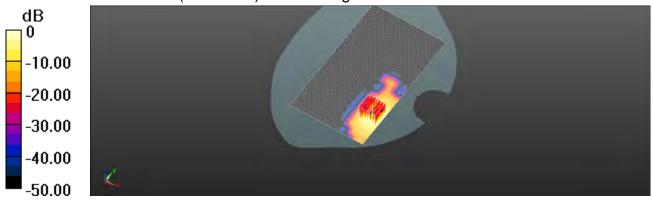

0 dB = 1.08 W/kg = 0.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 223 of 347

Date: 2016/5/6

WLAN 802.11a 5.8G Hand Right side CH 149 Aux 0mm

Communication System: WLAN 5G; Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz; $\sigma = 6.209$ S/m; $\varepsilon_r = 46.141$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.07, 4.07, 4.07); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (61x191x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 15.4 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 5.949 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 72.9 W/kg

SAR(1 g) = 9.47 W/kg; SAR(10 g) = 1.59 W/kgMaximum value of SAR (measured) = 27.3 W/kg

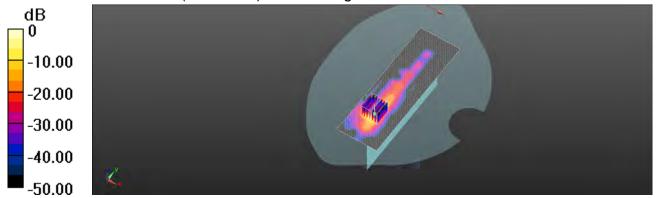

0 dB = 27.3 W/kg = 14.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 224 of 347

Date: 2016/5/9

Bluetooth_Hotspot_Back_CH 39

Communication System: Bluetooth; Frequency: 2441 MHz

Medium parameters used: f = 2441 MHz; $\sigma = 1.989$ S/m; $\varepsilon_r = 52.823$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.37, 7.37, 7.37); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (101x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0359 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 5.688 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00691 W/kg Maximum value of SAR (measured) = 0.0158 W/kg

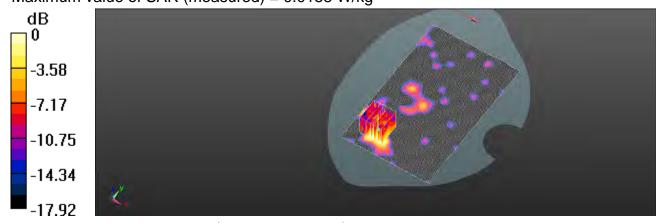

0 dB = 0.0158 W/kg = -18.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 225 of 347

6. SAR System Performance Verification

Date: 2016/5/4

Dipole 750 MHz_SN:1015_Body

Communication System: CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz; $\sigma = 0.976 \text{ S/m}$; $\varepsilon_r = 56.475$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn916; Calibrated: 2015/12/16

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.60 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.23 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg Maximum value of SAR (measured) = 2.66 W/kg

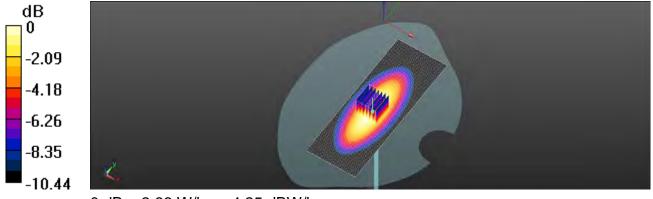

0 dB = 2.66 W/kg = 4.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 226 of 347

Date: 2016/5/8

Dipole 835 MHz_SN:4d063_Head

Communication System: CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz; $\sigma = 0.919 \text{ S/m}$; $\varepsilon_r = 40.894$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/09/02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x121x1): Interpolated grid: dx=15 mm,

Maximum value of SAR (interpolated) = 3.09 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.13 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.56 W/kgMaximum value of SAR (measured) = 3.09 W/kg

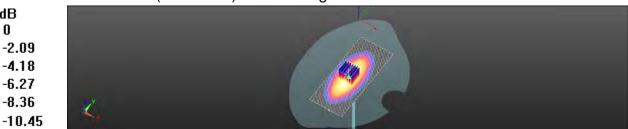

0 dB = 3.09 W/kg = 4.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 227 of 347

Date: 2016/5/3

Dipole 835 MHz_SN:4d063_Body

Communication System: CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz; $\sigma = 1.018$ S/m; $\varepsilon_r = 55.704$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (41x121x1): Interpolated grid: dx=15 mm,

Maximum value of SAR (interpolated) = 3.18 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.03 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.63 W/kgMaximum value of SAR (measured) = 3.17 W/kg

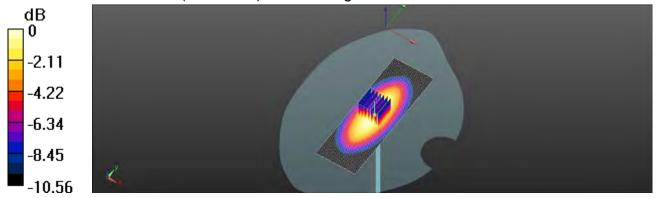

0 dB = 3.17 W/kg = 5.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 228 of 347

Date: 2016/5/7

Dipole 1750 MHz SN:1008 Head

Communication System: CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 39.277$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.6, 8.6, 8.6); Calibrated: 2015/09/02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x101x1): Interpolated grid: dx=15 mm,

Maximum value of SAR (interpolated) = 12.9 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.20 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.34 W/kg; SAR(10 g) = 4.86 W/kgMaximum value of SAR (measured) = 12.5 W/kg

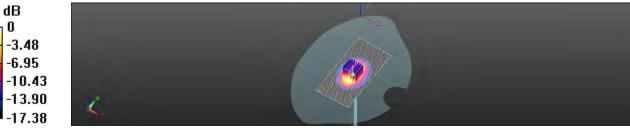

0 dB = 12.5 W/kg = 10.97 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 229 of 347

Date: 2016/4/28

Dipole 1750 MHz SN:1008 Body

Communication System: CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.438 \text{ S/m}$; $\varepsilon_r = 54.169$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (41x41x1): Interpolated grid: dx=15 mm,

Maximum value of SAR (interpolated) = 13.3 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.69 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.3 W/kg; SAR(10 g) = 4.93 W/kgMaximum value of SAR (measured) = 13.3 W/kg

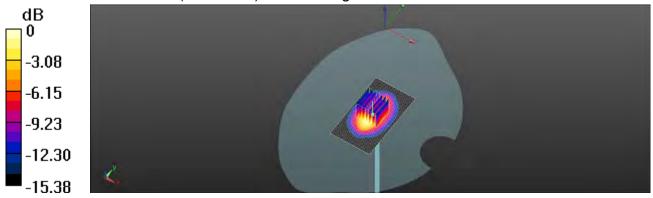

0 dB = 9.66 W/kg = 9.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 230 of 347

Date: 2016/5/2

Dipole 1900 MHz SN:5d027 Head

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.419 \text{ S/m}$; $\varepsilon_r = 38.968$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/09/02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (41x81x1): Interpolated grid: dx=15 mm,

Maximum value of SAR (interpolated) = 14.9 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.11 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 19.2 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.23 W/kgMaximum value of SAR (measured) = 14.6 W/kg

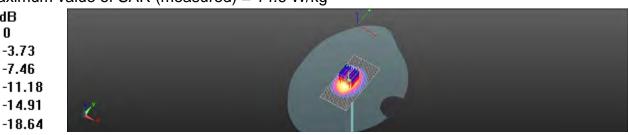

0 dB = 14.6 W/kg = 11.65 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 231 of 347

Date: 2016/4/27

Dipole 1900 MHz SN:5d027 Body

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.559 \text{ S/m}$; $\varepsilon_r = 53.728$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (41x41x1): Interpolated grid: dx=15 mm,

Maximum value of SAR (interpolated) = 14.0 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.61 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.53 W/kg; SAR(10 g) = 4.96 W/kgMaximum value of SAR (measured) = 13.7 W/kg

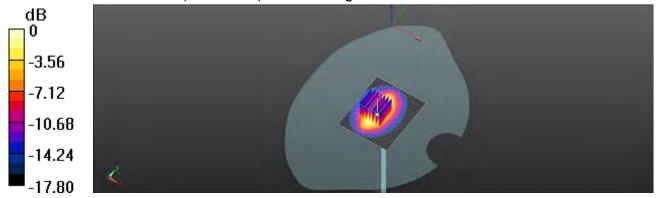

0 dB = 13.7 W/kg = 11.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 232 of 347

Date: 2016/4/30

Dipole 2300 MHz_SN:1023_Body

Communication System: CW; Frequency: 2300 MHz

Medium parameters used: f = 2300 MHz; $\sigma = 1.848 \text{ S/m}$; $\epsilon_r = 52.505$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7346; ConvF(7.57, 7.57, 7.57); Calibrated: 2015/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn916; Calibrated: 2015/12/16

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x101x1): Interpolated grid: dx=12 mm, dv=12 mm

Maximum value of SAR (interpolated) = 17.8 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.11 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 23.2 W/kg

SAR(1 g) = 11.7 W/kg; SAR(10 g) = 5.59 W/kg Maximum value of SAR (measured) = 17.4 W/kg

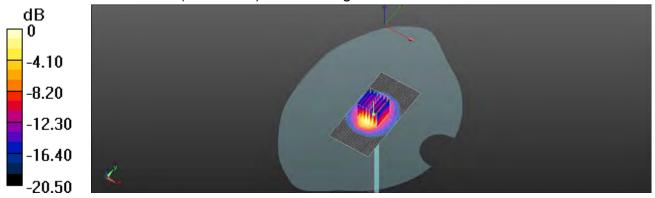

0 dB = 17.4 W/kg = 12.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 233 of 347

ate: 2016/5/9

Dipole 2450 MHz_SN:727_Head

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 1.884 \text{ S/m}$; $\varepsilon_r = 38.097$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.12, 7.12, 7.12); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.5 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.50 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.09 W/kg Maximum value of SAR (measured) = 20.4 W/kg

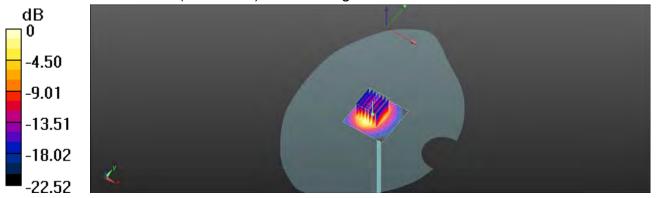

0 dB = 20.4 W/kg = 13.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 234 of 347

Date: 2016/5/9

Dipole 2450 MHz_SN:727_Body

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 2.003 \text{ S/m}$; $\varepsilon_r = 52.82$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.37, 7.37, 7.37); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.8 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.20 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 5.95 W/kg Maximum value of SAR (measured) = 20.6 W/kg

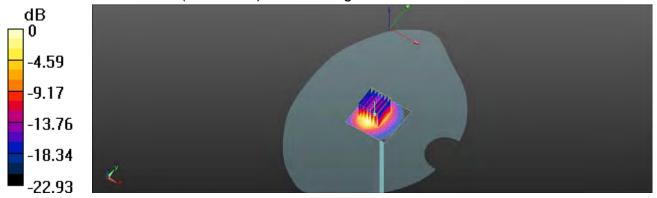

0 dB = 20.6 W/kg = 13.14 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 235 of 347

Date: 2016/4/29

Dipole 2600 MHz_SN:1058_Body

Communication System: CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.24 \text{ S/m}$; $\varepsilon_r = 51.705$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7346; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn916; Calibrated: 2015/12/16

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12 mm,

Maximum value of SAR (interpolated) = 23.3 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.52 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

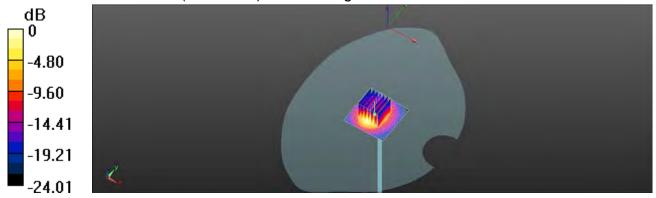

0 dB = 22.0 W/kg = 13.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 236 of 347

Date: 2016/5/10

Dipole 5200 MHz_SN:1023_Head

Communication System: CW; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 4.645 \text{ S/m}$; $\varepsilon_r = 36.445$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.0 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 62.00 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.13 W/kg Maximum value of SAR (measured) = 16.2 W/kg

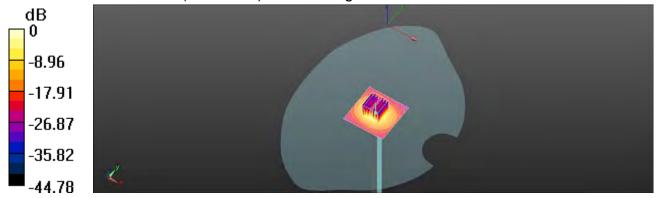

0 dB = 16.2 W/kg = 12.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 237 of 347

Date: 2016/5/5

Dipole 5200 MHz_SN:1023_Body

Communication System: CW; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 5.459 \text{ S/m}$; $\varepsilon_r = 47.922$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.3 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.71 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 25.6 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.24 W/kg Maximum value of SAR (measured) = 14.8 W/kg

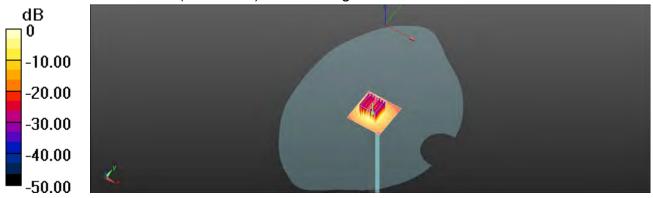

0 dB = 14.8 W/kg = 11.70 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 238 of 347

Date: 2016/5/11

Dipole 5300 MHz_SN:1023_Head

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: f = 5300 MHz; $\sigma = 4.768 \text{ S/m}$; $\varepsilon_r = 36.145$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.03, 5.03, 5.03); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.8 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 62.56 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 37.4 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.19 W/kgMaximum value of SAR (measured) = 16.8 W/kg

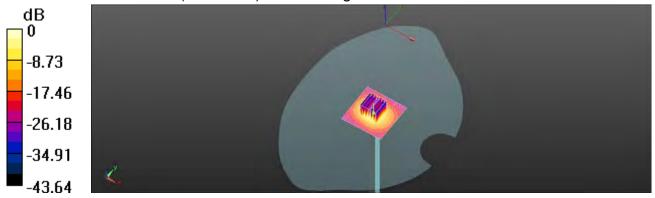

0 dB = 16.8 W/kg = 12.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 239 of 347

Date: 2016/5/5

Dipole 5300 MHz_SN:1023_Body

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: f = 5300 MHz; $\sigma = 5.609 \text{ S/m}$; $\varepsilon_r = 47.578$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3770; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/4/27;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2016/4/21

· Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.36 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 36.7 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 16.6 W/kg

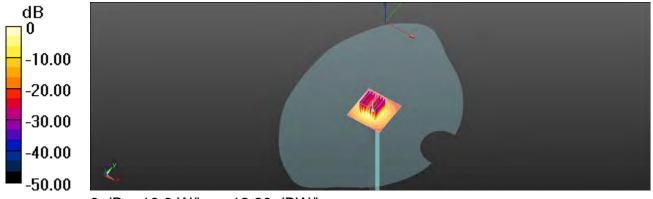

0 dB = 16.6 W/kg = 12.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 240 of 347

Date: 2016/5/12

Dipole 5600 MHz SN:1023 Head

Communication System: CW; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz; $\sigma = 5.154 \text{ S/m}$; $\varepsilon_r = 35.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.42, 4.42, 4.42); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=10 mm,

Maximum value of SAR (interpolated) = 18.6 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 64.41 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 42.1 W/kg

SAR(1 g) = 8.43 W/kg; SAR(10 g) = 2.34 W/kgMaximum value of SAR (measured) = 18.2 W/kg

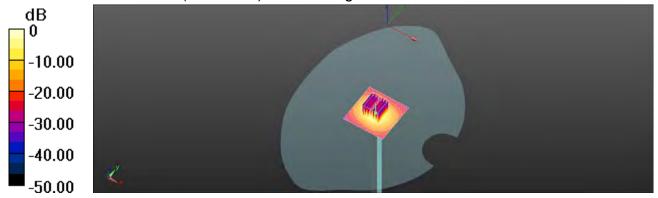

0 dB = 18.2 W/kg = 12.60 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 241 of 347

Date: 2016/5/6

Dipole 5600 MHz_SN:1023_Body

Communication System: CW; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz; $\sigma = 6.008 \text{ S/m}$; $\varepsilon_r = 46.572$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(3.7, 3.7, 3.7); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.0 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.18 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.38 W/kg Maximum value of SAR (measured) = 16.5 W/kg

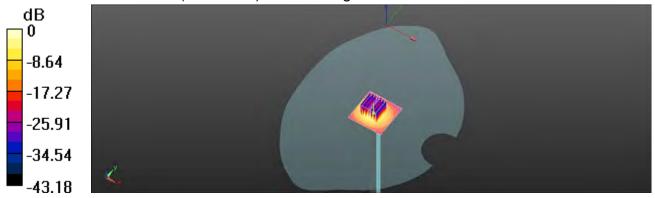

0 dB = 16.5 W/kg = 12.17 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 242 of 347

Date: 2016/5/13

Dipole 5800 MHz_SN:1023_Head

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: f = 5800 MHz; $\sigma = 5.398 \text{ S/m}$; $\varepsilon_r = 34.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.83, 4.83, 4.83); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.1 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.83 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 38.2 W/kg

SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.08 W/kg Maximum value of SAR (measured) = 16.1 W/kg

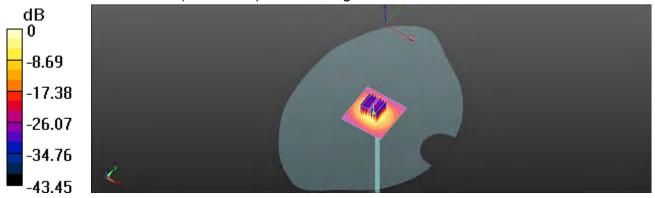

0 dB = 16.1 W/kg = 12.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 243 of 347

Date: 2016/5/6

Dipole 5800 MHz_SN:1023_Body

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: f = 5800 MHz; $\sigma = 6.145 \text{ S/m}$; $\epsilon_r = 46.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.07, 4.07, 4.07); Calibrated: 2016/4/27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2016/4/21
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm,

Maximum value of SAR (interpolated) = 16.9 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.43 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.15 W/kgMaximum value of SAR (measured) = 17.1 W/kg

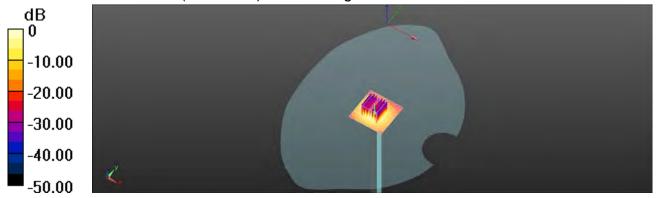

0 dB = 17.1 W/kg = 12.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 244 of 347

7. DAE & Probe Calibration Certificate

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizertscher Kalibrandianst Bervice suisse d'étalonnaus Servizio svizzero di taratura Swiss Calibration Service

Appreciated by the Swas Appreciation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 0108

Auden

Certificate No: DAE4-91B Dec15

CALIBRATION CERTIFICATE DAE4 - SD 000 D04 BK - SN: 916 QA CAL-06 v29 Caronido repositurais: Calibration procedure for the data acquisition electronics (DAE) December 16, 2015 The cultivation certificate documents tha traceability to national standards, which regize the preparation is of measurements (SI): The measurements and the uncertainties with confidence probability we given on the following pages and are part of the certificant All colimature have been conducted in the closed siboratory backly, environment temperature (22 ± 37 C and humidity = 70% Caldresson Equipment used (M&TE chical for calibration) Dal Dare (Certrisare No.) Scheduled Calibration Primary Standards SN: 0810278 09-Sep-15 (NO:17153) Sep-15 Kerthley Multimater Type 2001 Scheduled Check Check Date (In Irosse) Secondary Standards in house check. Jan 16 SE UWS 053 AA 1001 | 06-Jun-18 (in house check) Auto DAE Calibration Unit. In house check Jun-18 SE LIME DOS AA 1002 (RE-Jay-16 RY human check). Calibrator Blox VII.1 Findign Cattersted by Dominique Steffer Technician Deputy Technical Manager Firs Bornfield This collection circlicate shall not be reproduced except in full without written approxital of the lateratory

Certificate No. DAE4-916_Dec15

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 245 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizetischer Külmierdienil S Service su one d'étalennage Servizio avizzoro di tarature **Swiss Calibration Service**

Aggregitation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Mulliateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics

Connector angle Information used in DASY system to align probe sensor X to the robot

coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement. Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range
- Connector angle. The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - Common made sensitivity: Influence of a positive or negative common made voltage on the differential measurement
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage:
 - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
 - Imput Offset Measurement. Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information: Maximum channel input offset current, not considering the input resistance:
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Baltery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated,
 - Power consumption: Typical value for information. Supply currents in various operating modes

Certificats No DAE4-916_Dec15

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 246 of 347

DC Voltage Measurement

A/D - Converter Resolution nominal

1LSB = full range = -100...+300 mV full range = -1......+3mV High Range: 6.1µV. Low Range: 1LSB = 61nV, DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	x	Υ	Z
High Range	403.872 ± 0.02% (k=2)	403.658 ± 0.02% (k=2)	403.787 ± 0.02% (k=2)
Low Range	3.97309 ± 1.50% (k=2)	3.98670 ± 1.50% (k=2)	3.98020 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	237.5°±1°
	20,10 2 1

Certificate No: DAE4-916_Dec15

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 247 of 347

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200030.55	-1.38	-0.00
Channel X + Input	20007.80	3.85	0.02
Channel X - Input	-20002.99	2.15	-0.01
Channel Y + Input	200030.39	-1.74	-0.00
Channel Y + Input	20005.85	1.87	0.01
Channel Y - Input	-20004.60	0.77	-0.00
Channel Z + Input	200030.93	-1.37	-0.00
Channel Z + Input	20003.67	-0.26	-0.00
Channel Z - Input	-20007.07	-1.73	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2000.63	0.02	0.00
Channel X + Input	200.53	-0.21	-0.10
Channel X - Input	-199.49	-0.20	0.10
Channel Y + Input	2000.95	0.45	0.02
Channel Y + Input	199.89	-0.68	-0.34
Channel Y - Input	-200.17	-0.73	0.37
Channel Z + Input	2000.41	-0.10	-0.01
Channel Z + Input	199.38	-1.20	-0.60
Channel Z - Input	-200.57	-1.09	0.55

2. Common mode sensitivity

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	3.88	2.49
	- 200	-1.75	-3.33
Channel Y	200	-16.49	-16.75
	- 200	15.84	15.21
Channel Z	200	-23.05	-22.82
	- 200	21.32	21.11

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200		-1.09	-3.01
Channel Y	200	4.79	-	0.67
Channel Z	200	8.06	3.10	

Certificate No: DAE4-916_Dec15

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 248 of 347

4. AD-Converter Values with inputs shorted

sec: Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15879	14636
Channel Y	16103	16253
Channel Z	15949	14328

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

OMOL tuni

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	0.23	-0.60	0.95	0.33
Channel Y	0.00	-1.64	1.23	0.38
Channel Z	-0.98	-2.30	0.94	0.49

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25tA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9	
Supply (- Vcc)	-7.6	

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-916 Dec15

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 249 of 347

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multifateral Agreement for the recognition of calibration pertificates

SGS-TW (Auden)

coreditation No.: SCS 0108

Certificate No: DAE4-856_Apr16

CALIBRATION CERTIFICATE Object DAE4 - SD 000 D04 BM - SN: 856 Calibration procedure(s) QA CAL-06.v29 Calibration procedure for the data acquisition electronics (DAE) April 21, 2016 Calibration date: This calibration certificate documents the fraceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards ID # Cal Date (Certificate No.) Scheduled Calibration Keithiay Multimoter Type 2001 SN: 0810278 89-Sep-15 (No:17153) Sep-16 Scheduled Check Secondary Standards. Check Date (in house). Auto DAE Calibration Unit SE UWS 053 AA 1001 05 Jan-15 (in house check) In house check: Jan-17 Calibrator Box V2.1 SE UMS 006 AA 1002 D5-Jan-16 (in house check) In house phace: Jan-17 Name Function Signature Calibrated by R Mayoraz Technician Deputy Technical Manager Fin Bombat Approved by: Issued April 21, 2016

Certificate No: DAE4-856_Apr16

Page 1 of 5

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 250 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdinnit Service suisse d'étalennage Servizio svizzero di taratura Swiss Calibration Sorvice

Accreditation No.: SCS 0108

Acquillien by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Meditatoral Agreement for the recognition of calibration corillicates

Glossary

DAE

data acquisition electronics

Connector angle

information used in DASY system to align probe sensor X to the robot

coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range:
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and regulre no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement
 - Common mode sensitivity: influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No. DAE4-856 April 6

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 251 of 347

DC Voltage Measurement

A/D - Converter Resolution nominal

full range = -100...+300 mV full range = -1......+3mV High Range: 1LSB = 6.1µV, Low Range: 1LSB = 61nV , DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	х	Υ	Z
High Range	403.450 ± 0.02% (k=2)	404.571 ± 0.02% (k=2)	403.888 ± 0.02% (k=2)
Low Range	3.97641 ± 1.50% (k=2)	3.97912 ± 1.50% (k=2)	3.97796 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	52.0 ° ± 1 °
To a line of the land of the l	 32.0 ± 1

Certificate No: DAE4-856_Apr16

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 252 of 347

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (μV)	Error (%)
Channel X + Input	199996.11	0.91	0.00
Channel X + Input	19999.18	-2.34	-0.01
Channel X - Input	-19999.41	1.06	-0.01
Channel Y + Input	199997.66	2.51	0.00
Channel Y + Input	19998.64	-2.84	-0.01
Channel Y - Input	-20002.21	-1.65	0.01
Channel Z + Input	199995.99	0.62	0.00
Channel Z + Input	19999.35	-2.13	-0.01
Channel Z - Input	-20002.57	-1.88	0.01

Low Range	Reading (μV)	Difference (µV)	Error (%)
Channel X + Input	2001.58	0.10	0.01
Channel X + Input	202.26	0.40	0.20
Channel X - Input	-197.29	0.76	-0.38
Channel Y + Input	2001.59	0.10	0.00
Channel Y + Input	200.88	-1.08	-0.52
Channel Y - Input	-199.46	-1.39	0.70
Channel Z + Input	2001.75	0.28	0.01
Channel Z + Input	201.40	-0.39	-0.19
Channel Z - Input	-198.94	-0.69	0.35

2. Common mode sensitivity

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-14.19	-16.06
	- 200	18.03	16.49
Channel Y	200	-2.43	-2.73
	- 200	0.85	0.06
Channel Z	200	10.84	10.76
	- 200	-12.44	-12.80

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (μV)	Channel Z (µV)
Channel X	200		1.98	-2.81
Channel Y	200	7.60	-	4.11
Channel Z	200	9.54	4.60	-

Certificate No: DAE4-856_Apr16

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 253 of 347

4. AD-Converter Values with inputs shorted

	High Range (LSB)	Low Range (LSB)	
Channel X	16223	16358	
Channel Y	16947	17393	
Channel Z	15877	17066	

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time; 3 sec; Measuring time; 3 sec Input $10M\Omega$

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	0.86	0.04	1.50	0.29
Channel Y	-0.51	-2.36	0.33	0.41
Channel Z	-0.75	-2.04	0.01	0.30

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Voc)	+0.01	+6	+14
Supply (- Vec)	-0.01	-8	-9

Certificate No: DAE4-856_Apr16 Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 254 of 347

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizenscher Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accorditation Service is one of the signatories to the EA. Multilateral Agreement for the recognition of calibration certificates

Auden

Cartificate No: EX3-7346_Sep15

CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:7346

Calbinium propertures

QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date

September 2, 2015

This calibration certificate occurrents the tracescinty to national standards, which readow the physical units of measurements (Sti., The measurements and the uncertainties with confidence probability are given on the following pages and are part of the ceroficals:

All call brakers have been conducted in the closed laboratory facility, environment temperature (22 ± 37°C and humidity < 78%)

Calibration Equipment used (MATE critical for calibration)

103	Cai Date (Certificate No.)	Scheduled Calibration
GB41293874	01-Apr-15 (No. 217-02128)	Mar: 16
MY41498087	61-Apr-15 (No. 217-02128)	Mar-16.
SN: 95054 (3c)	01-Apr-15 (No. 217-02129)	Mar: 16
SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-46
SN. S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
SN 3013	30-Dec 14 (No ESS-3013 Dec14)	Dec-15
SN: 860	14-Jan-15 (No DAE4-980_Jan15)	Jan-16
iū.	Check Date (in mase)	Scheduled Check
U\$3642U01100	4-Aug-99 (in house check Apr-1%)	In house check: Apr. 15
US37390585	13-Oct-01 (in house theck Oct-14)	In house sheds. Oct-15
	MY41459087 SN: S8064 (3c) SN: S5277 (20x) SN: S5129 (30b) SN: 3013 SN: 880	GBid1293874 01-Apr-15 (No. 217-02128) MY41436087 91-Apr-15 (No. 217-02128) SN. S5064 (3c) 01-Apr-15 (No. 217-02128) SN. S5077 (20x) 01-Apr-15 (No. 217-02132) SN. S5077 (20x) 01-Apr-15 (No. 217-02132) SN. S5129 (30b) 01-Apr-16 (No. 217-02133) SN. 3013 30-Epc 14 (No. ES3-3013, Dec14) SN. 860 14-Jan-15 (No. DAE4-660, Jan-15) US3642/U01760 4-App-99 (in house-check Apr-15)

Name Function Calibrated by Israe Elineoue Laboratory Technician Year EN Cerry Approved by Каца Рокомо Technical Manager This calibration cardificate afrom not be reproduced except in full without written approval of the laborate

Certificate No: EX3-7346 Sep 15

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd



Page: 255 of 347

Calibration Laboratory of

Schmid & Partner Engineering AG oghamstrasse 41, 8004 Zurion Switzeria





Schweimrischer Kalibrerdienei S Service eurose d'étalomage C Sérvició ávizzero di faratura Switzs Chimpiton Service

Accorditation No.: SCS 0108

According by the Simon According to Service (SAS)

The Swiss Accreditation Service is one of the signments to the EA Multitateral Agreement for the recognition of calibration certification

Glossary:

TSL fissue simulating liquid NORMx, y, z sensitivity in free space ConvF DCP sensitivity in TSL / NORMy, y, z diode compression point

oreși facțor (1/duty_cycle) of the RF signal modulation dependent linearization parameters A. B. C. D.

Polarization (ii rotation around probe axis

Polarization 9 A rotation around an axis that is in the plane normal to probe axis (at measurement center).

i.e., 8 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system.

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spacial Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Directs. Measurement
- Techniques June 2013
 b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in closeproximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005.

 (i) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices."
- used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)*, March 2010 b) KDB 865664, 'SAR Measurement Requirements for 100 MHz to 6 GHz.'

Methods Applied and Interpretation of Parameters:

- WDRMx, y, z: Assessed for E-field polarization is = 0 (f < 900 MHz in TEM-cell, f > 1800 MHz; R22 waveguide) NORMx,y,z are only informediate values, i.e., the uncertainties of NORMx,y,z does not effect the E²-field uncertainty inside TSL (see below ConvF).
- MORIMITY, y, z = NORMX, y, z * frequency response lises Frequency Response Chart. This incentiation is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency majorise is included. in the stated uncertainty of CovyF
- DCPx.y.z. DCP are numerical meanization parameters assessed based on the data of power sweep with CW signal (no uncortainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined baseli on the signal characteristics
- As y. z. Bx, y. z. Cx, y. z. Ds, y. z. VRx, y. z. A. B. C., D are numerical innertration parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the cliede.
- CovivF and Boundary Effect Parameters. Assessed in flat phantom using E-field (or Temperatum Transfer Standard for f = 800 MHz) and inside waveguide using analytical field distributions based on power measurements for $f \ge 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (stphs, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the poundary. The sensitivity in TSL corresponds to NORMx,y.z.* Correl whereby the uncertainty corresponds to NORMx,y.z.* Correl A fraguency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100. MHz
- Spherical isotropy (30 deviation from isotropy): in a field of low gradients realized using a flat phantom. exposed by a patch antenna.
- Sensor Offset. The sensor offset corresponds to the offset of virtual measurement penter from the property. (on probe axis). No tolerance required
- Connector Angle. The angle is assessed using the information garned by determining the NORM/ (no. aricertainty required).

Certificate No. EX3-7346 Sep15

Page 2 bf 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

www.tw.sas.com



Page: 256 of 347

EX3DV4 = \$N:7346 September 2, 2015

Probe EX3DV4

SN:7346

Manufactured: October 13, 2014 Repaired: August 21, 2015 Calibrated: September 2, 2015

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: EX3-7346_Sep15

Page 3 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 257 of 347

EX3DV4-SN:7346

September 2, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) ²) ^A	0.53	0.52	0.49	± 10.1 %
DCP (mV) ⁸	98.0	101.9	98.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dBõV	С	D dB	VR mV	Unc ^b (k=2)
0	CW	X	0.0	0.0	1.0	0.00	158.9	±2.7 %
		Y	0.0	0.0	1.0		166.0	
		Z	0.0	0.0	1.0		163.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-7346 Sep15

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.

The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

Numerical linearization perameter: uncertainty not required.

Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the



Page: 258 of 347

EX3DV4-SN:7346 September 2, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^G	Relative Permittivity ^r	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ⁶ (mm)	Unc (k=2)
750	41.9	0.89	10.22	10.22	10.22	0.22	1.49	± 12.0 %
835	41.5	0.90	9.80	9.80	9.80	0.20	1.81	± 12.0 %
1750	40.1	1.37	8.60	8.60	8.60	0.42	0.80	± 12.0 %
1900	40.0	1.40	8.33	8.33	8.33	0.41	0.80	± 12.0 %
2000	40.0	1.40	8.13	8.13	8.13	0.38	0.80	± 12.0 %
2300	39.5	1.67	7.82	7.82	7.82	0.36	0.80	± 12.0 %
2450	39.2	1.80	7.27	7.27	7.27	0.42	0.80	± 12.0 %
2600	39.0	1.96	7.15	7.15	7.15	0.35	0.91	± 12.0 %
5200	36.0	4.66	5.29	5.29	5.29	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.09	5.09	5.09	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.66	4.66	4.66	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.48	4.48	4.48	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.59	4.59	4.59	0.40	1.80	± 13.1 %

⁶ Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), also it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

Certificate No: EX3-7346 Sep15

Page 5 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

validity can be extended to ± 110 MHz.

*At frequencies below 3 GHz, the validity of tissue parameters (c and d) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (c and d) is restricted to ± 5%. The uncertainty is the RSS of the ConvE uncertainty for indicated target tissue parameters.

*Alpha/Depth are determined during calibration. SPEAG userants that the remaining deviation due to the boundary effect after compensation is always likes than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Page: 259 of 347

EX3DV4- SN:7346

September 2, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ⁶	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.11	10.11	10.11	0.29	1.18	± 12.0 %
835	55.2	0.97	10.05	10.05	10.05	0.45	0.88	± 12.0 %
1750	53.4	1.49	8.06	8.06	8.06	0.29	1.03	± 12.0 %
1900	53.3	1.52	7.77	7.77	7.77	0.41	0.80	± 12.0 %
2000	53.3	1.52	7.99	7.99	7.99	0.41	0.83	± 12.0 %
2300	52.9	1.81	7.57	7.57	7.57	0.32	0.80	± 12.0 %
2450	52.7	1.95	7.43	7.43	7.43	0.44	0.80	± 12.0 %
2600	52.5	2.16	7.29	7.29	7.29	0.32	0.80	± 12.0 %
5200	49.0	5.30	4.64	4.64	4.64	0.45	1.90	± 13.1 %
5300	48.9	5.42	4.42	4.42	4.42	0.45	1.90	± 13.1 %
5500	48.6	5.65	3.95	3.95	3.95	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.90	3.90	3.90	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.08	4.08	4.08	0.50	1.90	± 13.1 %

⁶ Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 84, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

⁷ At frequencies below 3 GHz, the validity of tissue parameters (c and e) can be released to ± 10% if liquid compensation formula is applied to

Certificate No: EX3-7346_Sep15

Page 6 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

An inquentized setting 3 Carb, the validity of issue parameters (a and d) can be reliated to ± 10% if fliguid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of issue parameters (a and d) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ApharDepth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




Page: 260 of 347

EX3DV4- SN 7346

September 2, 2015.

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

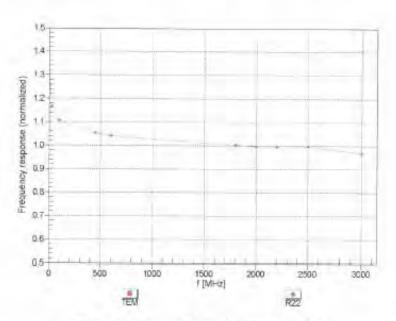

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No. EX3-7346_Sep15

Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 261 of 347

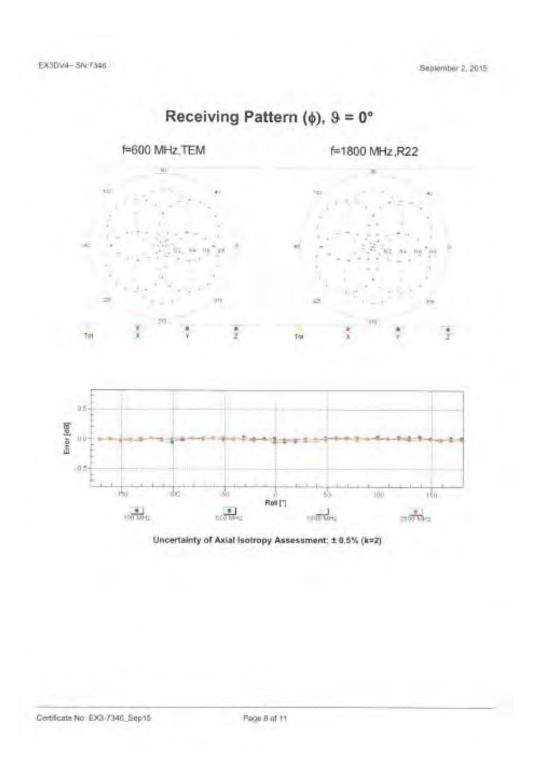


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 262 of 347

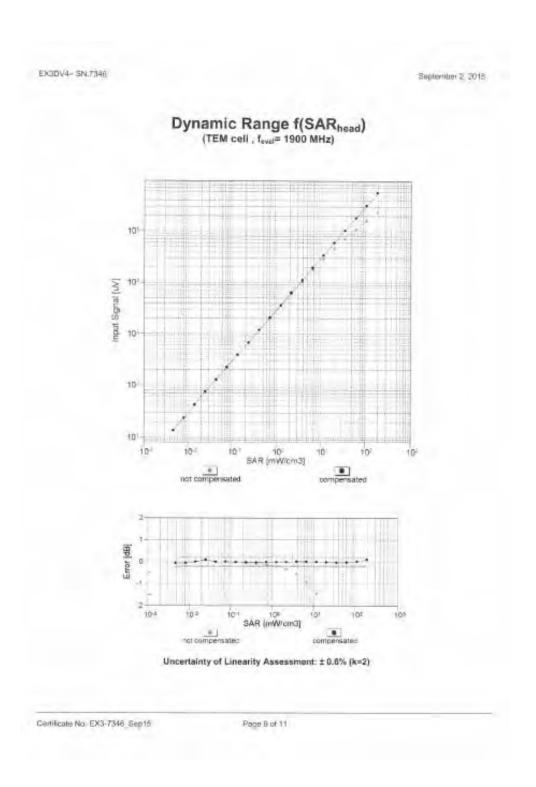


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 263 of 347

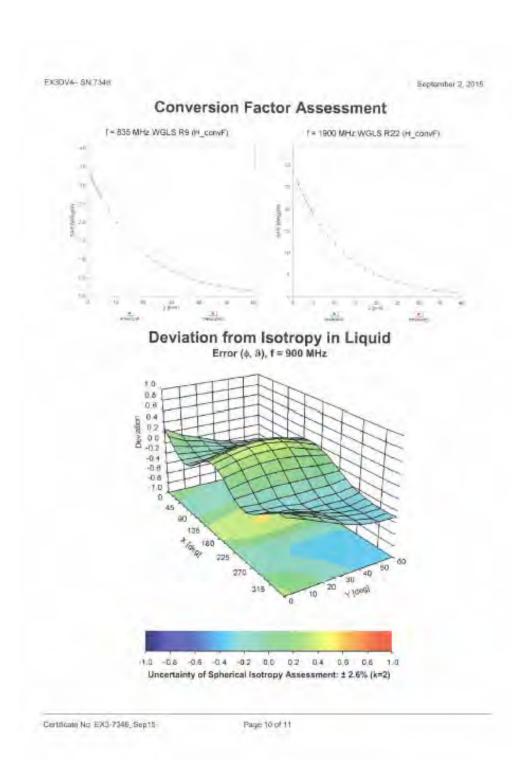

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 264 of 347

EX3DV4-SN:7346

September 2, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (")	-1.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Certificate No: EX3-7346_Sep15

Page 11 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 265 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughsusstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kattbrierdienst. Service suisse d'étalonnage Servicio sviczero di tenstura Swiss Califoration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Gerifficate No: EX3-3770_Apr16

CALIBRATION CERTIFICATE

EX3DV4 - SN 3770

(2stembon procession(s)

DA CAL-01/98, QA CAL-12/9, QA CAL-14/VI. QA CAL-23/V5.

DA CAL-25.V6

Calibration procedure for dosimetric E-field probes

Calculation data

April 27, 2016

This calibration cartificate documents the inscendibility to national standards, which review the physical units of measurements (31) The measurements and the uncertainnes with confidence probability are given an the following pages and are part of the continues

All cultionshare been conducted in the closed laboratory facility: environment femperature (22 ± 3)°C and framidity = 75%

Calibration Equipment used (M&TE collect for calibration)

Printary Standards	(0)	Cat Date (Certificate No.)	Scientified Calibrature
Power Weter NRP	3N: 104778	06-Apr-18 (No. 217-0288/0289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-18 (No. 217-02266)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17:
Relevence 20 dB Attenuator	BN: S5277 (20x)	65-Apr-16 (No. 217-02293)	Apr-17
Reference Prote ESSOV2	3N:3013	31-Dec-15 (No. EES-3013_Dec15)	Dep-18
DAS4	SN:060	23-Dec-15 (No. DAE4-660_Dec15)	Dec-16
Secondary Standards	1D	Check Date (in house)	Scheduled Check
Priver mater E44108	5N: G841293874	06-Apt-10 (No. 217-02285-02284)	In house check: Jun-16
Power sensor E4412A	EN: NY41498067	06-Apr-19 (No. 217-02285)	In house check: Jun-16
Power sensor EA412A	8N: 000110210	06-Apr-16 (No. 217-02284)	In house check: Jun-16
RP generator HP 65480	SN: US3842U91700	Q4-Aug-59 (in house check Apr-13)	In house check: Jun-15
Notwork Analyzer HP 8753E	SN: L/S17390585	18-DH-41 (In House check Oct-15)	In house check: Oct-16

Nairie	Function	Supplie
Cincilia i neción	Luciosatiny Feefmician	UEL
Kana Prisovi	Testineal Manage	RR.M.
		Innue April 27, 2018
	Cardio buche	Claudin Lacoutiny Rechtistan

Certificate No. EX3-3770_Apr16

Page 1 of 21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 266 of 347

Calibration Laboratory of Schmid & Partner Engineering AG





Schweizerlscher Kallbrierdienst S Service sunse d'économine C Servicio sviczeru di taratnesi S Swiss Calibration Sayvicu

Accreditation No.: SCS 0108

Accredited by the Swes Appreditation Service (SAS)

The Swiss Accreditation Service is one of the signato orien to the EA Multilatural Agreement for the recognition of calibration certificates

Glossary:

lissue simulating liquid TSL NORMX, y, z sensitivity in free space sensitivity in TSL / NORWx,y,z diode compression point Convi DCP

crest factor (1/duty_cycle) of the RF signal CF A.B.C.D modulation dependent linearization parameters

Palarization o is rotalion around probe sols

Polarization a a rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 ± 0 is from all to probe exist information used in DASY system to align probe sensor X to the robot coordinate system. Connector Angle:

Calibration is Performed According to the Following Standards:

a) IEEE 5td 1528-2013, "IEEE Recommanded Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Continuations Devices; Measurement

Techniques", June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

EC 62209-2, 'Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)". Merch 2010 d) KDB 866864, SAR Measurement Requirements for 100 MHz to 6 GHz

Methods Applied and Interpretation of Parameters:

- NORMx,y,z. Assessed for E-field polarization $\theta = 0$ ($f \le 900$ MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z obes not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF
- DCPx,v,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the skinst characteristics.
- Ax,y,z, Bx,y,z; Ox,y,z; Ox,y,z; VRx,y,z, A, B, C, D are rumerical Inearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters. Assessed in flat phantom using E-field (or Temperature Transfer Standard for I = 800 MHz) and inside waveguide using analytical field distributions based on power measurements for t > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alphs, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds: to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz
- Spherical isotropy (20 deviation from isotropy): in a field of low gradients realized using a flat alternions exposed by a patch antenna.
- Sensor Offset: The sensor affset corresponds to the offset of virtual measurement center from the probe tip. (on probe axis). No inferance required.
- Connector Angle: The angle is assessed using the information galited by determining the MORMX (no uncertainty required).

Certificate No. EX3-3770_Apr16

Page 2 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.



Page: 267 of 347

EX3DV4 -- SN:3770

April 27, 2016

Probe EX3DV4

SN:3770

Manufactured: Calibrated: July 6, 2010 April 27, 2016

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: EX3-3770_Apr16

Page 3 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 268 of 347

EX3DV4-SN:3770

April 27, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) ²) ^A	0.31	0.61	0.40	± 10.1 %
DCP (mV) ^a	100.4	97.4	102.0	

Modulation Calibration Parameters

UID	Communication System Name		A	В	С	D	VR	Unc
			dB	dB√μV		dB	mV	(k=2)
0	CW	X	0.0	0.0	1.0	0.00	145.0	±2.2 %
		Y	0.0	0.0	1.0		148.7	
		Z	0.0	0.0	1.0		135.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-3770_Apr16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 4 of 11

SGS Taiwan Ltd.

A The uncertainties of Norm X,Y,Z do not affect the E¹-field uncertainty inside TSL (see Pages 5 and 6).

Numerical linearization parameter: uncertainty not required.

Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Page: 269 of 347

EX3DV4-SN:3770

April 27, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity F	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha ⁶	Depth ^G (mm)	Unc (k=2)
450	43.5	0.87	11.36	11.36	11.36	0.18	1.20	± 13.3 %
750	41.9	0.89	9.83	9.83	9,83	0.41	0.88	± 12.0 %
835	41.5	0.90	9.47	9.47	9.47	0.14	1.48	± 12.0 %
900	41.5	0.97	9.17	9.17	9.17	0.15	1.78	± 12.0 %
1750	40.1	1.37	8.19	8.19	8.19	0.12	1.68	± 12.0 %
1900	40.0	1.40	7.88	7.88	7.88	0.12	1.77	± 12.0 %
2000	40.0	1.40	7.91	7.91	7.91	0.14	1.61	± 12.0 %
2300	39.5	1.67	7.47	7.47	7.47	0.13	2.08	± 12.0 %
2450	39.2	1.80	7.12	7.12	7.12	0.14	2.00	± 12.0 %
2600	39.0	1.96	6.95	6.95	6.95	0.21	1.26	± 12.0 %
5250	35.9	4.71	5.03	5.03	5.03	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.42	4.42	4.42	0.50	1.80	± 13.1 %
5750	35.4	5.22	4.83	4.83	4.83	0.50	1.80	± 13.1 %

⁰ Frequency validity above 309 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), also it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 123, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

*A frequencies below 3 GHz, the validity of tissue parameters (a and a) can be released to ± 10% if liquid comparation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (a and a) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

*Alpha/Depth are detarmined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies belowen 3-6 GHz at any distance larger than half the probe tip dismeter from the boundary.

Certificate No: EX3-3770_Apr16 Page 5 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 270 of 347

EX3DV4-- SN:3770

April 27, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity*	Conductivity (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ⁶ (mm)	Unc (k=2)
450	56.7	0.94	10.49	10.49	10.49	0.09	1.20	± 13.3 %
750	55.5	0.96	9.43	9.43	9.43	0.19	1.26	± 12.0 %
835	55.2	0.97	9.30	9.30	9.30	0.17	1.43	± 12.0 %
900	55.0	1.05	9.15	9.15	9.15	0.28	1.06	± 12.0 %
1750	53.4	1.49	7.88	7.88	7.88	0.10	2.60	± 12.0 %
1900	53.3	1.52	7.71	7.71	7.71	0.11	2.44	± 12.0 %
2000	53.3	1.52	7.82	7.82	7.82	0.18	1.42	± 12.0 %
2300	52.9	1.81	7.53	7.53	7.53	0.54	0.69	± 12.0 %
2450	52.7	1.95	7.37	7.37	7.37	0.80	0.56	± 12.0 %
2600	52.5	2.16	7.12	7.12	7.12	0.80	0.56	± 12.0 %
5250	48.9	5.36	4.34	4.34	4.34	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.70	3.70	3.70	0.60	1.90	± 13.1 %
5750	48.3	5.94	4.07	4.07	4.07	0.60	1.90	± 13.1 %

Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), olse it is restricted to ± 50 MHz. The uncertainty is the RSS of the Corn/F uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 30 MHz is ± 10, 25, 40, 50 and 70 MHz for Corn/F assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

*At frequencies below 3 GHz, the validity of itssue parameters (s and o) can be released to ± 10% if liquid componention formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (s and o) is restricted to ± 5%. The uncertainty is the RSS of the Corn/F uncertainty for indicated target tissue parameters.

*Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-3770_Apr16

Page 6 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 271 of 347

EX3DV4-SN:3770

April 27, 2016

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

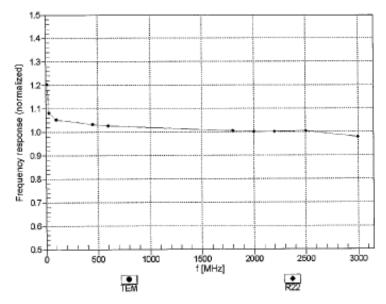

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3770_Apr16 Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.




Page: 272 of 347

EX3DV4-SN:3770 April 27, 2016

Receiving Pattern (6), 9 = 0°

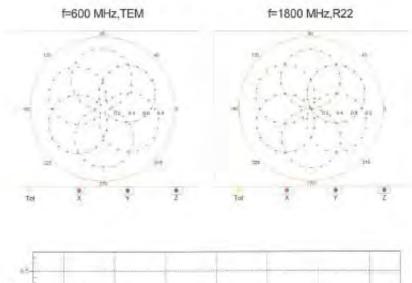

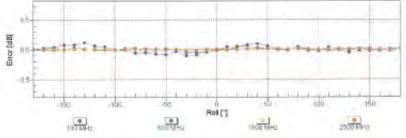

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3770_Apr16

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.




Page: 273 of 347

EX3DV4- SN:3770 April 27, 2016

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

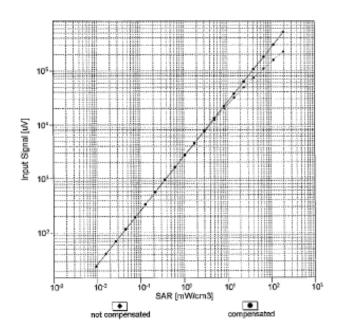

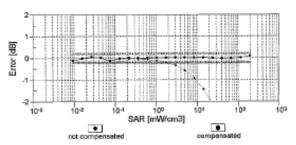

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3770_Apr16 Page 9 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 274 of 347

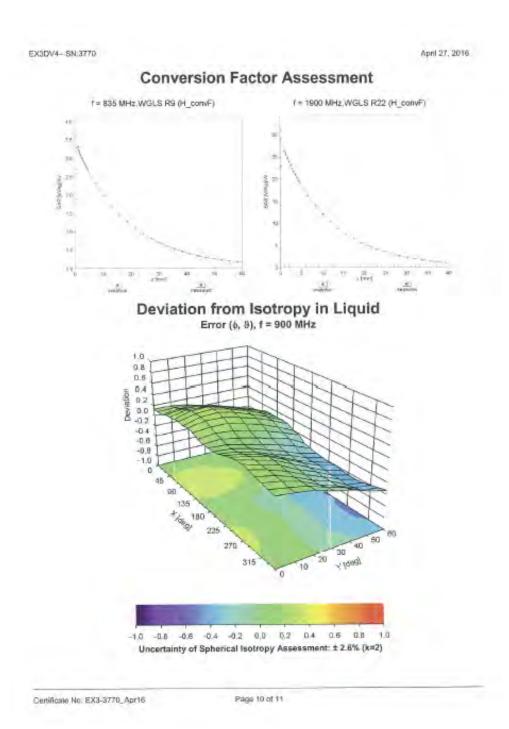

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 275 of 347

EX3DV4-SN:3770 April 27, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3770

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-29.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Page 11 of 11 Certificate No: EX3-3770_Apr16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 276 of 347

8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	4.74%	N	1	1	0.64	0.43	3.03%	2.04%	М
Liquid Conductivity (mea.)	4.60%	N	1	1	0.6	0.49	2.76%	2.25%	М
Combined standard uncertainty		RSS					12.41%	12.09%	
Expant uncertainty (95% confidence							24.83%	24.19%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 277 of 347

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.92%	N	1	1	0.64	0.43	1.87%	1.26%	М
Liquid Conductivity (mea.)	4.85%	N	1	1	0.6	0.49	2.91%	2.38%	М
Combined standard uncertainty		RSS					11.93%	11.72%	
Expant uncertainty (95% confidence							23.86%	23.44%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 278 of 347

9. Phantom Description



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com

Phon

TITLE



Page: 279 of 347

10. System Validation from Original Equipment Supplier

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: D750V3-1015 Aug15

ALIDITATION	CERTIFICATE		
Object	D750V3 - SN: 10	15	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	edure for dipole validation kits abo	ove 700 MHz
Calibration date:	August 24, 2015		
The measurements and the unce	irfainties with confidence p	ional standards, which realize the physical un liobability are given on the following pages ar	d are part of the certificate.
All calibrations have been condu- Calibration Equipment used (M&		ry facility: environment temperature (22 ± 3)°	C and humidity < 70%.
Primary Standards	ID#	Married Marriage (CV)	Part of who will
	U #	Cal Date (Certificate No.)	
	CB37495704		Scheduled Calibration
Power meter EPM-#42A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power meter EPM-n42A Power sensor HP B481A	US37292783	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020)	Oct-15 Oct-15
Power meter EPM-442A Power sensor HP B481A Power sensor HP B481A	US37292783 MY41092317	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021)	Oct-15 Oct-15 Oct-15
Power mater EPM-n42A Power sensor HP 8481A Power sensor HP 8481A Reletence 20 dB Attenuator	US37292783 MY41092317 SN: 5058 (20k)	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131)	Oct-15 Oct-15 Oct-15 Mar-16
Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Atternator Type-N mismatch combination	US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16
Power meter EPM-n42A Power sensor HP 8481A Power sensor HP 9481A Power sensor HP 9481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES30V3	US37292783 MY41092317 SN: 5058 (20k)	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131)	Oct-15 Oct-15 Oct-15 Mar-16
Power meter EPM-n42A Power sensor HP B481A Power sensor HP B481A Power sensor HP B481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3/DV3 DAE4	US37292785 MY41092317 SN: 5058 (20k) SN: 5047,2 / 06327 SN: 3205 SN: 601	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 30-Dec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16
Power meter EPM-n42A Power sensor HP B481A Power sensor HP B481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards	US37292785 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601	07-Ccl-14 (No. 217-02020) 07-Ccl-14 (No. 217-02020) 07-Ccl-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 30-Dec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16
Power meter EPM-n42A Power sensor HP P4611A Power sensor HP P4611A Reletence 20 dB Attenuator Type-N instantach combination Reference Probe ES3DV3 DAE4 Secondary Standards OF generator R&C CMT 06	US37292785 MY41092317 SN: 5058 (20k) SN: 5047,2 / 06327 SN: 3205 SN: 601	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 30-Dec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-18 Scheduled Check
Power meter EPM-n42A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards DF generator RSC EMT-05 Network Analyzer HP 8753E	US37292783 MY41092317 SN: 5058 (20k) SN: 5047,2 / 06327 SN: 3205 SN: 601	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 30-Occ-14 (No. ES9-3206_Doc14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16
Power meter EPM-n42A Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N reismatch combination Reference Probe ES3DV3 DAE4 Sacondary Standards OF generator R&D DMT-05 Network Analyzer HP 8753E	US37292785 MY41092317 SN: 5059 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 1000000 US37590585 S4206	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 30-Dec-14 (No. ES3-3206_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house) 04-Aug-88 (in house check Oct-13) 18-Oct-01 (in house check Oct-14)	Oct-15 Oct-15 Oct-15 Mer-16 Mar-16 Dec-15 Aug-16 Scheduled Check Influese check: Oct-16
Power meter EPM-n42A Power sensor HP 9481A Power sensor HP 9481A Reference 20 dB Atternator Type-N inismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards DF generator DSC EMT 06	US37292785 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 1000000 US37390585 S4206	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02031) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in nouse) 04-Aug-98 (in house check Oct-13) 18-Oct-01 (in house check Oct-14)	Oct-15 Oct-15 Oct-15 Mer-16 Mar-16 Dec-15 Aug-16 Scheduled Check Influese check: Oct-16

Certificate No: D750V3-1015_Aug15

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 280 of 347

Calibration Laboratory of

Schmid & Partner Engineering AG Zoughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suissa d'étalonnage Sarvizio svizzero di taratura Swiss Calibration Service

Accorditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of colibration certificates

Glossary:

TSL

tissue simulating liquid

ConvF N/A

sensitivity in TSL / NORM x,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)". February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipple positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Certificate No: D750V3-1015_Aug15

Page 2 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 281 of 347

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

Head TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.15 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.33 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	56.3 ± 6 %	1.00 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.19 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.52 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.63 W/kg ± 16.5 % (k=2)

Certificate No: D750V3-1015_Aug15

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 282 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.2 Ω - 1.1]Ω
Return Loss	- 32.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.5 Ω - 2.4 jΩ
Return Loss	- 30.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.036 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 22, 2010

Certificate No: D750V3-1015_Aug15 Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 283 of 347

DASY5 Validation Report for Head TSL

Date: 21.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz; $\sigma = 0.91 \text{ S/m}$; $\varepsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard; DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: ES3DV3 SN3205; ConvF(6.44, 6.44, 6.44); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 53.39 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.35 W/kg

Maximum value of SAR (measured) = 2.43 W/kg

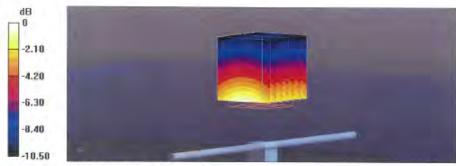

0 dB = 2.43 W/kg = 3.86 dBW/kg

Certificate No: D750V3-1015_Aug15

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 284 of 347

Impedance Measurement Plot for Head TSL

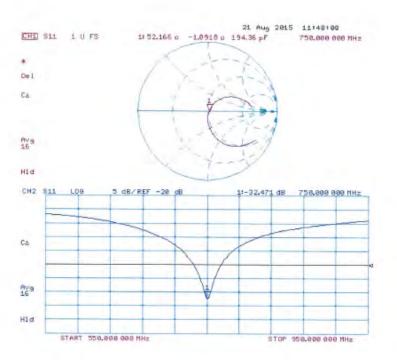

Certificate No: D750V3-1015_Aug15

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 285 of 347

DASY5 Validation Report for Body TSL

Date: 24.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz; $\sigma = 1 \text{ S/m}$; $\varepsilon_r = 56.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard; DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConvF(6.21, 6.21, 6.21); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 52.22 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.19 W/kg; SAR(10 g) = 1.44 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

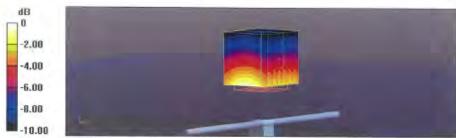

0 dB = 2.56 W/kg = 4.08 dBW/kg

Certificate No: D750V3-1015_Aug15

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 286 of 347

Impedance Measurement Plot for Body TSL

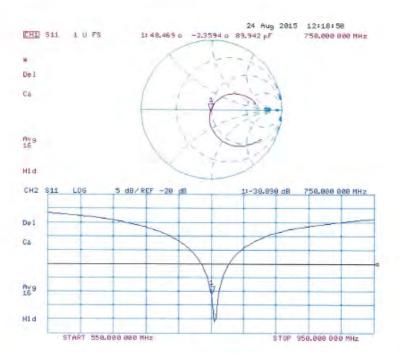

Certificate No: D750V3-1015_Aug15 Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 287 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swits Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

PALIBRATION	ERTIFICATE		
Object	D835V2 - SN: 4d	063	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
Calibration date:	August 24, 2015		
The measurements and the unce	ertainties with confidence p	enal standards, which realize the physical un robatality are given on the following pages as ny facility: environment temperature (22 ± 3)*1	ici are part of the certificate.
		,,	a manage (man
Calibration Equipment used (M&	TE critical for collibration)		
Selibration Equipment used (MS)		Cal Date (Certificate No.) 07-Oct-14 (No. 217-00320)	Scheduled Calibration Oct-15
Sittrision Equipment used (M& vimary Standards Power mater EPM-442A	TE critical for cellbration)	Cal Date (Certificate No.)	Scheduled Calibration
Calibration Equipment used (M&) Himary Standards Power meter EPM-442A Nower sensor HP 8481A	TE critical for cellbration) 10 n 0837480704	Cal Date (Certificate No.) 07-Oct-14 (No. 217-00020)	Scheduled Calibration Dct-15
Calibration Equipment used (M&) Inmary Standards Power mater EPM-442A Tower sensor HP 8481A	ID # 0897480704 US37292783	Cal Date (Certificate No.) 07-Oct-14 (No. 217-00020) 07-Oct-14 (No. 217-02020)	Scheduled Celibration Oct-15 Oct-15
Celibration Equipment used (M&) Primary Standards Power mater EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attanuator	TE critical for childrenent ID # 0897480704 US37292783 MY41092317	Cal Date (Certificate No.) 07-Oct-14 (No. 217-03920) 07-Oct-14 (No. 217-03920) 07-Oct-14 (No. 217-02921)	Scheduled Celibration Dct-15 Opt-15 Opt-16
Celibration Equipment used (M&) Primary Standards Power mater EPM-442A Power sensor HP 8481A Reference 20 dB Attanuator Type-N mismatch combination	TE critical for childrenons ID # 0897480704 US37292783 MY41082317 SN: 5058 (20%)	Cal Date (Certificate No.) 07-Oct-14 (No. 217-08920) 07-Oct-14 (No. 217-08920) 07-Oct-14 (No. 217-08921) 01-Apn15 (No. 217-08131)	Scheduled Calibration Oct-15 Oct-15 Mar-16
Calibration Equipment used (MS) Primary Standards Power mater EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3	TE critical for critications ID # 0897480704 US37292783 MY41092317 SN: 5058 (20x) SN: 9047.2 / 06327	Cal Date (Certificate No.) 07-Oct-14 (No. 217-08020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-April 5 (No. 217-02131) 01-April 5 (No. 217-02134)	Scheduled Calibration Oct-15 Oct-15 Oct-15 Man-16 Man-16
Celibration Equipment used (M&) Primary Standards Power maler EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards	ID # 0B37480704 US37292783 MY41092317 SN: 5068 (20%) SN: 5047.2 / 06327 SN: 3005	Cal Date (Certificate No.) 07-Oct-14 (No. 217-08320) 07-Oct-14 (No. 217-08320) 07-Oct-14 (No. 217-02021) 01-April 5 (No. 217-02131) 01-April 5 (No. 217-02134) 30-Dec-14 (No. E53-3305 Dec14)	Scheduled Calibration Dct-15 Oct-15 Oct-16 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check
Celibration Equipment used (M&) Primary Standards Power mater EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards	TE critical for civilibration) ID # 0897480704 US37292783 MY41092317 SN: 5058 (20%) SN: 5047.2 / 06327 SN: 3205 SN: 901	Cal Date (Certificate No.) 07-Oct-14 [No. 217-03920) 07-Oct-14 [No. 217-03920) 07-Oct-14 [No. 217-02920) 07-Oct-14 [No. 217-02021) 01-Apr-15 [No. 217-02131) 01-Apr-15 [No. 217-02134) 30-Osc-14 (No. ES2-3205 Osc-14) 17-Aug-15 (No. OAE4-601 Aug13)	Scheduled Calibration Dct-15 Oct-15 Oct-16 Man-16 Man-16 Dec-15 Aug-16
Calibration Equipment used (Mail Primary Standards Power mater EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4	ID # 0897480704 US37292783 MY41092317 SN: 5058 (20x) SN: 5051 SN: 601	Cal Date (Certificate No.) 07-Oct-14 [No. 217-08920) 07-Oct-14 [No. 217-08920) 07-Oct-14 [No. 217-08920) 07-Oct-14 [No. 217-08921) 01-Apr-15 [No. 217-02131) 01-Apr-15 [No. 217-02131) 30-Dec-14 (No. ES3-3205 Dec14) 17-Aug-15 (No. DAE4-601 Aug15) Check Date (in house)	Scheduled Calibration Dct-15 Oct-15 Oct-16 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check
Calibration Equipment used (Mail Primary Standards Power mater EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4	TE critical for civilibration) ID # 0897480704 US37292783 MY41092317 SN: 5058 [20%) SN: 50572 / 06327 SN: 3205 SN: 601 ID # 100005 US37390585 S4206	Cal Date (Certificate No.) 07-Oct-14 [No. 217-03920) 07-Oct-14 [No. 217-03920) 07-Oct-14 [No. 217-03920) 07-Apr-15 [No. 217-02131) 01-Apr-15 [No. 217-02131) 30-Dec-14 (No. E52-3205 Oac14) 17-Aug-15 (No. DAE4-601 Aug-13)	Scheduled Galibration Dct-15 Oct-15 Oct-15 Man-16 Man-16 Date-15 Aug-16 Scheduled Gheck In house check: Oct-16 In house check: Oct-15
Calibration Equipment used (M&) Inimary Standards Power meter EPM-442A Power sensor HP 8481A Reference 20 dB Attenuator Typer 9 mismatch contabultor Reference Probe ES3DV3 DAE4 Secondary Standards RE generator R&S SMT-06 Network Analyzer HP 8753E	ID # 0897480704 US37292783 MY41092317 SN: 5058 (20%) SN: 5058 (20%) SN: 5057 SN: 505	Cal Date (Certificate No.) 07-Oct-14 [No. 217-03020) 07-Oct-14 [No. 217-03020) 07-Oct-14 [No. 217-02021) 01-Apr-15 [No. 217-02131) 01-Apr-15 [No. 217-02131) 01-Apr-15 [No. ES2-3205 Osc14) 17-Aug-15 (No. DAE4-601 Aug15) Check Date (in house) 04-Aug-99 (in house check Oct-13) 18-Oct-01 [in house check Oct-14)	Scheduled Calibration Dct-15 Oct-15 Oct-15 Man-16 Man-16 Dac-15 Aug-16 Scheduled Check In house check, Oct-16
Celizyson Equipment used (M&) Primary Standards Power mater EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dE Attenuator Typer Ninkmatch combination Reference Probe ES3DV3 DAE4 Secondary Standards RE generative R&S SMT-06 Network Analyzer HP 8753E	TE critical for civilibration) ID # 0897480704 US37292783 MY41092317 SN: 5058 [20%) SN: 50572 / 06327 SN: 3205 SN: 601 ID # 100005 US37390585 S4206	Cal Date (Certificate No.) 07-Oct-14 [No. 217-03920) 07-Oct-14 [No. 217-03920) 07-Oct-14 [No. 217-03920) 07-Apr-15 [No. 217-02131) 01-Apr-15 [No. 217-02131) 30-Dec-14 (No. E52-3205 Oac14) 17-Aug-15 (No. DAE4-601 Aug-13)	Scheduled Gelibration Dct-15 Oct-15 Oct-15 Aug-16 Man-16 Man-16 Disc-15 Aug-18 Scheduled Check In house check: Oct-16 In house check: Oct-15
Calibration Equipment used (M&) Primary Standards Prower netter EPM-442A Prower sensor HP 8481A Prower sensor HP 8481A Prower sensor HP 8481A Prower sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards RF generator R&S SMT-06 Network Analyzer HP 8753E Calibrated by:	ID # 0897480704 US37292783 MY41092317 SN: 5058 (20%) SN: 5058 (20%) SN: 5057 SN: 505	Cal Date (Certificate No.) 07-Oct-14 [No. 217-03020) 07-Oct-14 [No. 217-03020) 07-Oct-14 [No. 217-02021) 01-Apr-15 [No. 217-02131) 01-Apr-15 [No. 217-02131) 01-Apr-15 [No. ES2-3205 Osc14) 17-Aug-15 (No. DAE4-601 Aug15) Check Date (in house) 04-Aug-99 (in house check Oct-13) 18-Oct-01 [in house check Oct-14)	Scheduled Galibration Dct-15 Oct-15 Oct-15 Man-16 Man-16 Date-15 Aug-16 Scheduled Gheck In house check: Oct-16 In house check: Oct-15

Certificate No: D835V2-4d063_Aug15

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 288 of 347

Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausetrasse 13, 3004 Zurich, Switzerland





S Schweizertscher Kalibrierdiem C Service suisse d'étalomage Servicie svizzere di terniura S Swiss Calibration Service

According by the Swim Accordinates Service (SAS)

According by the Swim Accordinates Service (SAS)

The Swiss Accreditation Service is one of the signatures to the EA. Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tlesue simulating liquid
ConvF sensitivity in TSL / NORM x.y.z.
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- ib) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", Merch 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Contribate No. DB35V2-4d863 Aug 15

Page 2 of I

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 289 of 347

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.9 ± 6 %	0.93 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.11 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.52 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.97 W/kg ± 16.5 % (k=2)

Body TSL parameters

nd calculations were andied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	56.1 ± 6 %	1.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.28 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.11 W/kg ± 16.5 % (k=2)

Certificate No: D835V2-4d063_Aug15

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 290 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.3 Ω - 1.7 jΩ
Return Loss	- 33.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.9 Ω - 2.7 jΩ	
Return Loss	- 29.1 dB	

General Antenna Parameters and Design

Electrical Delay (one direction)	1.394 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the clipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	November 27, 2006	

Certificate No: D835V2-4d063_Aug15

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 291 of 347

DASY5 Validation Report for Head TSL

Date: 21.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d063

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz; $\sigma = 0.93$ S/m; $\varepsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: ES3DV3 SN3205; ConvF(6.2, 6.2, 6.2); Calibrated: 30.12.2014;
- · Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17,08,2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 55.92 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3,44 W/kg

SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.52 W/kgMaximum value of SAR (measured) = 2.73 W/kg

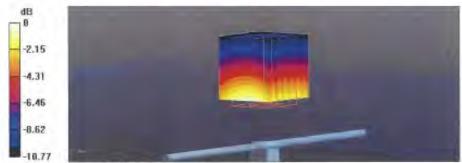

0 dB = 2.73 W/kg = 4.36 dBW/kg

Certificate No: D635V2-4d063_Aug15

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 292 of 347

Impedance Measurement Plot for Head TSL

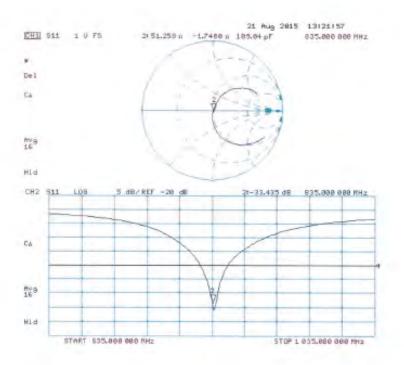

Certificate No: D835V2-4d063_Aug15

Page 6 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 293 of 347

DASY5 Validation Report for Body TSL

Date: 24.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d063

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConvF(6.17, 6.17, 6.17); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 54.07 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.57 W/kg Maximum value of SAR (measured) = 2.81 W/kg

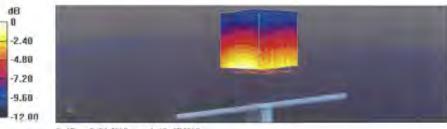

0 dB = 2.81 W/kg = 4.49 dBW/kg

Certificate No: D835V2-4d063_Aug15

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 294 of 347

Impedance Measurement Plot for Body TSL

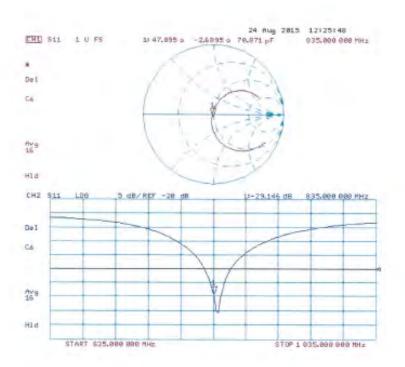

Certificate No: D835V2-4d063_Aug15

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 295 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura

Swiss Calibration Service Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: D1750V2-1008_Aug15 CALIBRATION CERTIFICATE D1750V2 - SN: 1008 Calibration procedura(s) QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz Calibration date. August 20, 2015 This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards ID # Cal Date (Certificate No.) Scheduled Calibration Power meter EPM-442A GB37480704 07-Oct-14 (No. 217-02020) Power sensor HP 8481A US37292783 07-Oct-14 (No. 217-02020) Oct-15 Power sensor HP 8481A MY41092317 07-Oct-14 (No. 217-02021) Oct-15 Reference 20 dB Attenuator SN: 5058 (20k) 01-Apr-15 (No. 217-02131) Mar-16 Type-N mismatch combination SN: 5047.2 / 06327 01-Apr-15 (No. 217-02134) Mar-16 Reference Probe ES3DV3 SN: 3205 30-Dec-14 (No. ES3-3205 Dec14) Dec-15 DAF4 SN: 601 17-Aug-15 (No. DAE4-601 Aug15) Aug-18 Secondary Standards Check Date (in house) Scheduled Check RF generator R&S SMT-06 100006 04 Aug 99 (in house check Oct-13) In house church: Oct-18 Network Analyzer HP 8753E US37390585 S4206 18-Oct-01 (in house check Oct-14) In house check: Oct-15 Name Function Callbratud by: Michael Weber Laboratory Technician Approved by: Katja Pokovic Technical Manager Issued: August 21, 2015 This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: D1750V2-1008_Aug15

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 296 of 347

Calibration Laboratory of Schmid & Partner

Engineering AG Zoughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSI tissue simulating liquid ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D1750V2-1008_Aug15

Page 2 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 297 of 347

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 6 %	1.36 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.85 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.4 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.1 ± 6 %	1.48 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.36 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.2 W/kg ± 16.5 % (k=2)

Certificate No: D1750V2-1008_Aug15

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 298 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.5 Ω + 1.1 jΩ
Return Loss	- 38.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.9 Ω + 1.0 jΩ
Return Loss	- 29.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 11, 2009

Certificate No: D1750V2-1008_Aug15

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 299 of 347

DASY5 Validation Report for Head TSL

Date: 20.08,2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type; D1750V2; Serial: D1750V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.36 \text{ S/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(5.2, 5.2, 5.2); Calibrated: 30.12.2014;

· Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 17.08.2015

Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001


DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 95.15 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.12 W/kg; SAR(10 g) = 4.85 W/kgMaximum value of SAR (measured) = 11.5 W/kg

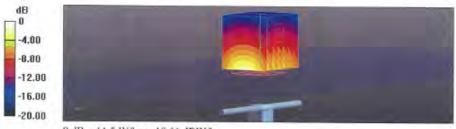

0 dB = 11.5 W/kg = 10.61 dBW/kg

Certificate No: D1750V2-1008_Aug15

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 300 of 347

Impedance Measurement Plot for Head TSL

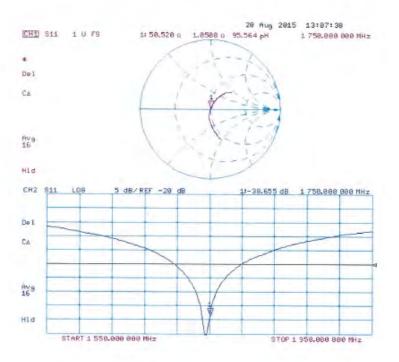

Certificate No: D1750V2-1008_Aug15

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 301 of 347

DASY5 Validation Report for Body TSL

Date: 20.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.48$ S/m; $\varepsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConvF(4.88, 4.88, 4.88); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 93.12 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.36 W/kg; SAR(10 g) = 5.05 W/kg

Maximum value of SAR (measured) = 11.8 W/kg



0 dB = 11.8 W/kg = 10.72 dBW/kg

Certificate No: D1750V2-1008_Aug15

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 302 of 347

Impedance Measurement Plot for Body TSL

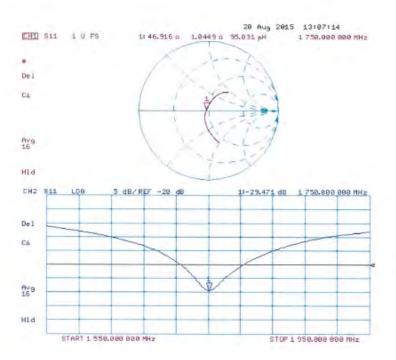

Certificate No: D1750V2-1008_Aug15

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 303 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzenland





Schweizerischer Kelltrierdienst Service auisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swise Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: D1900V2-5d027 Apr 16

CALIBRATION CERTIFICATE D1900V2 - SN: 5d027 OA CAL-05.V9 Calibration procedure(s) Calibration procedure for dipole validation kits above 700 MHz Calibration date: April 25, 2016 This contention curtificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with comidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) ID# Cal Date (Certificate No.) Scheduled Calibration Primary Standards 5N: 104778 06-Apr-16 (No. 217-02288/02289) Power meter NRP April 7 Power sensor NRP-Z91 SN: 103244 06-Apr-16 (No. 217-02288) Power sensor NRP-Z91 SN: 103245 05-Apr-16 (No. 217-02289) Apr-17 Reference 20 dB Attenuator 5N: 5058 (20k) 85-Apr-16 (No. 217-02292) Apr-17 Type-N mismaich combination SN: 5047.2 / 06327 05-Apr-16 (No. 217-02295) Apr-17 31-Dec-15 (No. EX3-7349, Dec15) Dec-16 Reference Probe EX3DV4 SN: 7349 Dec-16 DAE4 SN: 601 30-Dec-15 (No. DAE4-601, Dec15). Scheduled Check De Check Date (In house) Secondary Standards Power meter EPM-442A SN: GB37480704 07-Oct-15 (No. 217-02222) in house check: Oct-16 Power sensor HP 8481A SN: US37292783 07-Oct-15 (No. 2)7-02222 in house check: Oct-16 Power sensor HP 8481A SN: MY41092317 07-Oct-15 (No. 217-02223) In house check: Oct-18. RF generalor R&S SMT-06 SN: 100972 15-Jun-15 (in house check Jun-15) In nouse check Oct-16 Network Analyzer HP 8753E SN: US37390685 16-Oct-01 (in house check Oct-15) in house check: Did-16 Name Eurotion Calibrated by: Michael Weber Laboratory Technician Kalja Povovic Tachnical Manager Approved by: Issued: April 26, 2016 This cationation certificate shall not be reproduced except in full without writtin approval of the laboratory

Certificate No: D1900V2-5d027 Apr16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 304 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizenscher Kallbrierdieset Service suisse d'étaloonage Servicie svizzere di tératura Swiss Gallbrellon Service

Accreditation No.: SCS 0108

Accepted by the Sweet Acceptation Service (SAS)

The Swiss Accreditation Service is one of the signalories to the EA Multilatoral Agreement for the recognition of calibration certificates

Glossary:

TSL

tissue simulating liquid

ConvF N/A sensitivity in TSL / NORM x,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

 a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

 b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010

d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D1900V2-5d027_Aprilia

Page 2 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 305 of 347

Measurement Conditions

MST system configuration, as lar as not	given on page 1.	
DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.0 ± 6 %	1.37 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	38.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.3 W/kg ± 16.5 % (k=2)

Body TSL parameters

s and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.9 ± 6 %	1.49 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.83 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 16.5 % (k=2)

Certificate No: D1900V2-5d027_Apr16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 306 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.8 Ω + 4.4 jΩ
Return Loss	- 27.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.5 Ω + 5.6 jΩ
Return Loss	- 23.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2002

Certificate No: D1900V2-5d027_Apr16

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 307 of 347

DASY5 Validation Report for Head TSL

Date: 25.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.37 \text{ S/m}$; $\varepsilon_c = 40$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard; DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.2, 8.2, 8.2); Calibrated: 31.12,2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type; QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.9 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.03 W/kg

Maximum value of SAR (measured) = 14.3 W/kg



0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1900V2-5d027_Apr16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 308 of 347

Impedance Measurement Plot for Head TSL

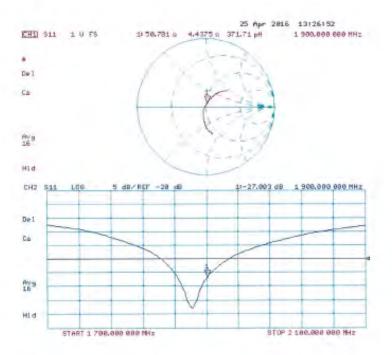

Certificate No: D1900V2-5d027_Apr16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 309 of 347

DASY5 Validation Report for Body TSL

Date: 25.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.49$ S/m; $\varepsilon_c = 52.9$; $\rho = 1000$ kg/m⁵

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.03, 8.03, 8.03); Calibrated; 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372).

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.2 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.83 W/kg; SAR(10 g) = 5.21 W/kg

Maximum value of SAR (measured) = 14.7 W/kg

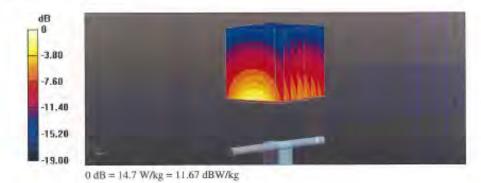

Certificate No: D1900V2-5d027_Apr16

Page 7 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 310 of 347

Impedance Measurement Plot for Body TSL

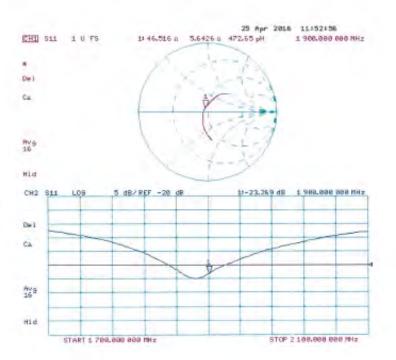

Certificate No: D1900V2-5d027_Apr16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 311 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: D2300V2-1023_Aug15

	CERTIFICATE		
Object	D2300V2 - SN:1	023	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
Calibration date:	August 19, 2015		
This calibration certificate docum	ents the traceability to nat	ional standards, which realize the physical un	its of measurements (SI).
		robability are given on the following pages array facility: environment temperature $(22 \pm 3)^{\circ}$	
	TE critical for calloration)	y racing, coveraging to report the (22 ± 3)	o and holology < 70%.
Community Edublies name (was	and the second second		
	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Primary Standards	,	Cal Date (Certificate No.) 97-Oct-14 (No. 217-02020)	Scheduled Calibration Oct-15
Printary Standards Power meter EPM-442A	ID #		
Primary Standards Power meter EPM-442A Power sensor HP 8481A	ID # GB37480704	97-Oct-14 (No. 217-02020)	Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A	ID # GB37490704 US37292789	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020)	Oct-15 Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator	ID # GB37480704 US37292783 MY41092317	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021)	Oct-15 Oct-15 Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismalch combination	(D III GB37480704 US37292783 MY41092317 SN: 5058 (20k)	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131)	Oct-15 Oct-15 Oct-15 Mar-16
Primary Standards Power meter EPM-442A Power sensor HP 9481A Power sensor HP 9481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ESSDV3 DAE4	ID # GB37480704 US37292783 MY41092317 SN: 5088 (20k) SN: 5047.2 / 06327	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16
Primary Standards Power meter EPM-442A Power sensor HP 9481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ESSDV3	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Oec-14 (No. ES3-3205_Dec14)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A Reference 20 GB Attenuator Type-N mismalch combination Reference Probe ESSDV3 DAE4 Secondary Standards	(D # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5057:2 / 06327 SN: 3205 SN: 601	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house)	Oct-15 Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-18 Scheduled Check
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismalch combination Reference Probe ESSDV3 DAE4 Secondary Standards RF generator R&S SMT 06	(D # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Oec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15)	Oct-15 Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check In livuse check; Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 GB Attenuator Type-N mismalch combination Reference Probe ESSDV3 DAE4	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID #	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 30-Dec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check In house check: Oct-15 In house check: Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ESSDV3 DAE4 Secondary Standards RF generator R&S SMT 08 Network Analyzer HP 8753E	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 100005 US37390585 S4206	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Oec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house) 04-Aug-38 (in house check Oct-14) Function	Oct-15 Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check In livuse check; Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismalch combination Reference Probe ESSDV3 DAE4 Secondary Standards RF generator R&S SMT 06	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 100005 US37390585 S4206	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house) D4-Aug-39 (in house check Oct-13) 18-Oct-01 (in house check Oct-14)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check In house check: Oct-15 In house check: Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 9481A Power sensor HP 9481A Power sensor HP 9481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ESSDV3 DAE4 Secondary Standards RF generator R8.8 SMT 08 Network Analyzer HP 8753E	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 100005 US37390585 S4206	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Oec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date (in house) 04-Aug-38 (in house check Oct-14) Function	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check In house check: Oct-15 In house check: Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481 A Power sensor HP 8481 A Reference 20 dB Attenuator Type-N mismalch combination Reference Probe ESSDV3 DAE4 Secondary Standards RF generator R88 6MT 08 Network Analyzer HP 8753E Calibrated by:	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 100005 US37390585 S4206 Name Jelon Kastrati	97-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14) 17-Aug-15 (No. DAE4-601_Aug15) Check Date [in house) 04-Aug-39 (in house check Oct-14) Function Laboratory Technican	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-16 Scheduled Check In house check: Oct-15 In house check: Oct-15

Certificate No: D2300V2-1023_Aug15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 312 of 347

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques*, June 2013
- EC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions; Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Gertificate No. D2300V9-1023_Aug15

Rage 2 of fl

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holed of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Page: 313 of 347

Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2300 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.7 ± 6 %	1.71 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	49.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.9	1.81 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.6 ± 6 %	1.83 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	48.3 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.87 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.5 W/kg ± 16.5 % (k=2)

Certificate No: D2300V2-1023_Aug15

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 314 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	47.9 Ω - 1.3 jΩ
Return Loss	- 31.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.0 Ω - 0.6 jΩ
Return Loss	- 25.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.171 ns	

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 30, 2009

Certificate No: D2300V2-1023_Aug15 Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 315 of 347

DASY5 Validation Report for Head TSL

Date: 19.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1023

Communication System: UID 0 - CW; Frequency: 2300 MHz.

Medium parameters used: f = 2300 MHz; $\sigma = 1.71 \text{ S/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard; DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: ES3DV3 SN3205; ConvF(4.75, 4.75, 4.75); Calibrated: 30.12,2014;
- · Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 101.5 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 23.5 W/kg

SAR(1 g) = 12.4 W/kg; SAR(10 g) = 6.03 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

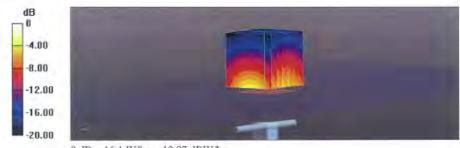

0 dB = 16.1 W/kg = 12.07 dBW/kg

Certificate No: D2300V2-1023_Aug15

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 316 of 347

Impedance Measurement Plot for Head TSL

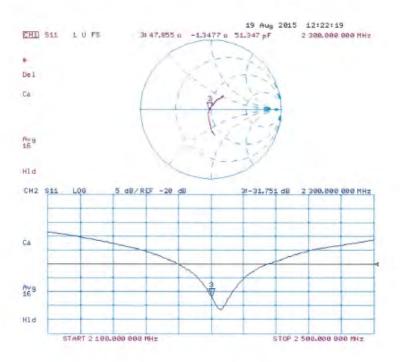

Certificate No: D2300V2-1023_Aug15

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 317 of 347

DASY5 Validation Report for Body TSL

Date: 19.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1023

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used: f = 2300 MHz; $\sigma = 1.83 \text{ S/m}$; $\varepsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.44, 4.44, 4.44); Calibrated: 30.12.2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 17.08.2015

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 96.46 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 23.2 W/kg

SAR(1 g) = 12.1 W/kg; SAR(10 g) = 5.87 W/kgMaximum value of SAR (measured) = 15.8 W/kg



0 dB = 15.8 W/kg = 11.99 dBW/kg

Certificate No: D2300V2-1023_Aug15

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 318 of 347

Impedance Measurement Plot for Body TSL

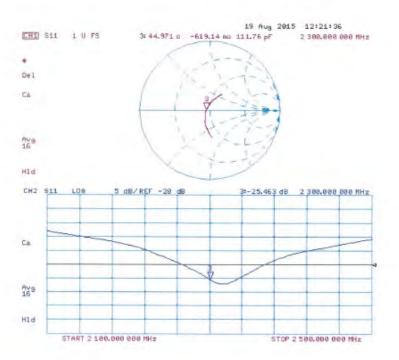

Certificate No: D2300V2-1023_Aug15 Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 319 of 347

Calibration Laboratory of Schmid & Partner Engineering AG usstrasse 43, 9004 Zurich, Switzerland





Schweizerlischer Kallignerdienst S Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Certificate No: D2450V2-727_Apr16

SGS-TW (Auden) CALIBRATION CERTIFICATE D2450V2 - SN:727 Obtect QA CAL-05.v9 Calibration procedure(s) Calibration procedure for dipole validation kits above 700 MHz Calibration date: April 19, 2016 This calibration certificate documents the tracephility to national standards, which walled the physical units of intessurer The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate: All calibrations have been conducted in the closed subtrainty lacility, surviousness temperature (22 ± 3)°C and humidity = 70%. Calibration Equipment used (M&TE critical for calibration) DA Cal Date (Certificate No.) Scheduled Calibration Primary Standards 06-Apr-16 (No. 217-02288/02289) SN: 104778 Apr-17 Power mater NRP Power sensor NRP-Z91 SN: 103244 06-Apr-16 (No. 217-02288) Apr-17 Power sensor NRP-Z91 SN: 103245 06-Apr-16 (No. 217-02289) Apr-17 Reference 20 dB Attenuator SN: 5058 (20k) 05-Apr-16 (No. 217-02292) Apr-17 Type-N mismatch combination SN: 5047.2 / 06327 05-Apr-16 (No. 217-02295) Apr-17 Reference Probe EX3DV4 SN: 7349 31-Dec-15 (No. EX3-7349 Dec16) Dec-16 DAE4 SN: 601 30-Dec-15 (No. DAE4-601_Dec15) Dec-15 Secondary Standards Scheduled Check Check Bale (in house) ID 4 Power meter EPM-442A SN 0837480704 07-Oct-15 (No. 217-02222) In house check: Oct-16: SN US37292769 07-Oct-15 (No. 217-02222) In house check: Opt-16. Power sensor HP 8481A SN: MY41092317 07-Oct-15 (No. 217-02223) in house check; Oct-16. Power sensor HP 8481A **Fif generator Fig.S SMT-06** SN. 100972 (5-Jun-15 (in house check Jun-15) in nouse check: Oct-16 SN: US37390585 18-Oct-01 (in house check Oct-15) in house check: Oct-16 Network Analyzer HP 6753E Function Michael Weber Laboratory Technician Calibrated by: Kalja Poković Technical Manager Approved by: Issuell: April 20, 2016 This calibration conflictate shall not be reproduced except in full without written approval of the laboratory

Certificate No: D2450V2-727_Apr16 Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 320 of 347

Calibration Laboratory of Schmid & Partner Engineering AG trasse 43, 8004 Zuricht, Switzerland





Schweizerlscher Kalibrierdienst Service suisse d'étatonnage Servizio evizzero di taratura

Assertitution No.: SCS 0108

According by the Swiss According on Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilinieral Agreement for the recognition of calcuration certificates

Glossary:

TSL tissue simulating liquid sensitivity in TSL / NORM x,y,z ConvF not applicable or not measured N/A

Calibration is Performed According to the Following Standards:

- EEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)11. February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)*, March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms criented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement. multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Centificate Not D2455V2-727 April 6

Page 2 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 321 of 347

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

re and calculations were anniied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.0 ± 6 %	1.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.7 ± 6 %	1.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.5 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.86 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.3 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-727_Apr16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 322 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.3 Ω + 2.0 jΩ
Return Loss	- 25.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	52.1 Ω + 4.8 jΩ
Return Loss	- 25.9 dB

General Antenna Parameters and Design

٠		
ı	Electrical Delay (one direction)	1.148 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Certificate No: D2450V2-727_Apr16

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 323 of 347

DASY5 Validation Report for Head TSL

Date: 19.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz.

Medium parameters used: f = 2450 MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.76, 7.76, 7.76); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015.
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.1 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 25.7 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.93 W/kg

Maximum value of SAR (measured) = 20.8 W/kg



0 dB = 20.8 W/kg = 13.18 dBW/kg

Certificate No. D2450V2-727_Apr16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 324 of 347

Impedance Measurement Plot for Head TSL

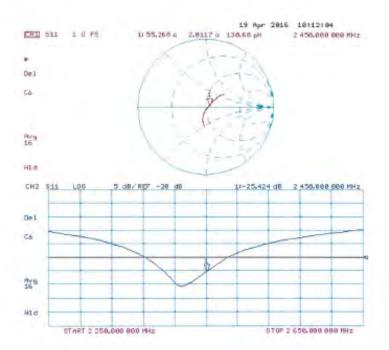

Certificate No: D2450V2-727_Apr16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 325 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kellbrierdlenst Service suisse d'étalonnage C Servizio svizzero di teratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

PALIBRATION	CERTIFICATI		
Otyace	D2600V2 - SN: 1	005	
Cathulan (mosdinejs)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits ab	oove 700 MHz
Continue date.	January 21, 2018	3	
This calibration perificate docum The measurements and the unce	ents the traceability to nat daubles with confidence ρ	onal standards, which metre the physical or notability are given on the following pages a	ints of measurements (SI); and are part of the certificans:
All colibrations have been conduc	cted in the closed taborato	ry facility: environment temperature (22 ± 3)	°C and humidity < 70%.
Calibration Equipment used (MS)	TE critical for calibration)		
Calibration Equipment used (MS: Primary Standards	TE critical for calibration)	Cal Date (Certificate No.)	Scheduled Calibration
Primary Standards		Cal Date (Certificate No.) 07-Oct-15 (No. 217-02222)	Scheduled Calibration Oct-16
Primary Standards Power meter EPM-442A	IDA .		Control of the Contro
Primary Standards Power meter EPM-442A Power sensor HP 8481A	ID # GB37480704	07-Oct-15 (No. 217-02222)	Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 9481 A Power sensor HP 9481 A	ID # GB37480704 US37292783	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Oct-16 Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481 A Reference 20 dB Attenuator Type N mismatch combination	ID # GB37480704 US37292783 MY41082317	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	Oct-16 Oct-16 Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 9481A Peterence 20 dB Attenuator Type N mematich combination Releience Probe EX3DV4	ID.A GB37480704 US37292763 MY41082817 SN: 5068 (204) SN: 5047.2 / 06327 SN: 7349	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 31-Dec-15 (No. EX3-7349_Occ15)	Oct-16 Oct-15 Oct-16 Mar-16
Primary Standards Power meter EPM-442A Power sensor HP 9481A Peterence 20 dB Attenuator Type-N mesmatch combination Relatance Probe EX3DV4	ID # GB37480704 US37392783 MY41082317 SN: 5058 (204) SN: 5047.2 / 06327	07-0ct-15 (No. 217-02222) 07-0ct-15 (No. 217-02222) 07-0ct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-16
	ID.A GB37480704 US37292763 MY41082817 SN: 5068 (204) SN: 5047.2 / 06327 SN: 7349	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Oct-15 (No. 217-02134) 31-Dec-15 (No. 217-02134) 30-Dec-15 (No. DAE4-601, Dec15)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-18 Dec-16
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power HP	ID.A ISB37480704 US37292760 MY41082317 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7549 SN: 901	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 31-Dec-15 (No. EX3-7349_Occ15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house)	Oct-16 Oct-16 Oct-16 Oct-16 Mar-16 Mar-16 Dec-16 Dec-16 Scheduled Creck
Primary Standards Power meter EPM-442A Power sensor HP 9481A Power sensor HP 8481A Power sensor HP 8481A Peterence 20 dB Attenuator Type-N mismatch combination Relationace Probe EX3DV4 DAE4	ID.4 GB37480704 US37292763 MY41092317 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7348 SN: 601	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Oct-15 (No. 217-02134) 31-Dec-15 (No. 217-02134) 30-Dec-15 (No. DAE4-601, Dec15)	Oct-16 Oct-15 Oct-15 Mai-16 Mai-18 Dec-16 Dec-16
Primary Standards Power sensor HP 8481 A Power sensor HP 8481 A Power sensor HP 8481 A Peterence 20 dB Attenuator Type N mismatch combination Releience Probe EX3DV4 DAE4 Secondary Standards RF generator RAS SMT-06	ID # GB37490704 US37292763 MY41082317 SN: 5069 (204) SN: 5047-2 / 06327 SN: 7349 SN: 801	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02231) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601 Dec15) Check Date (in house)	Oct-16 Oct-15 Oct-15 Mar-16 Mar-16 Dec-16 Dec-16 Scheduled Crede In house check: Jun-18 In house check: Oct-16
Primary Standards: Power meter EPM-442A Power sensor HP 9481A Power sensor HP 8481A Peterence 20 dB Attenuator Type-N mismatch combination Released Probe EX3DV4 DAE4 Becondary Standards IF generator R&S SMT-06 Network Analyses HP 8753E	ID.4 GB37480704 US37292783 MY41092317 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID.# 109872 US37390585 54206	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Oct-15 (No. 217-02131) 01-Oct-15 (No. EX3-7349_Dec15) 30-Dec-15 (No. DAE4-001_Dec15) Check Date in house 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Cct-16)	Oct-16 Oct-16 Oct-16 Mari-18 Mari-18 Dec-16 Dec-16 Scheduled Creek
Primary Standards Power sensor HP 8481 A Power sensor HP 8481 A Power sensor HP 8481 A Peterence 20 dB Attenuator Type N mismatch combination Releience Probe EX3DV4 DAE4 Secondary Standards RF generator RAS SMT-06	ID A GB37480704 US37292783 MY41082317 SN: 5050 (204) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID # 100972 US37390585 54208	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02233) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 31-Dec-15 (No. 217-02134) 31-Dec-15 (No. EX3-7349_Dec15) 30-Dec-15 (No. DAE4-801_Dec15) Check Date (in house) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Cct-16)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-16 Dec-16 Dec-16 Scheduled Creck In house check: Jun-18 In house check: Oct-16
Primary Standards: Power meter EPM-442A Power sensor HP 9481A Power sensor HP 8481A Peterence 20 dB Attenuator Type-N mismatch combination Released Probe EX3DV4 DAE4 Becondary Standards IF generator R&S SMT-06 Network Analyses HP 8753E	ID.4 GB37480704 US37292783 MY41092317 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID.# 109872 US37390585 54206	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Oct-15 (No. 217-02131) 01-Oct-15 (No. EX3-7349_Dec15) 30-Dec-15 (No. DAE4-001_Dec15) Check Date in house 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Cct-16)	Oct-16 Oct-16 Oct-15 Mar-16 Mar-16 Dec-16 Dec-16 Schedulad Creck In house check: Jun-18 In house check: Oct-16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Certificate No: D2600V2-1005_Jan16

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 1 of 8

SGS Taiwan Ltd.



Page: 326 of 347

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallhrierdienst Service suisse d'Williannage C Servizio svizzero di tersione Swies Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accordination Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration cartificates.

Glossary:

TSI tissue simulating liquid ConvF sensitivity in TSL / NORM x,y,z N/A. not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques*, June 2013.
- IEC 62209-1, 'Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)*, March 2010.
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end. of the certificate. All figures stated in the certificate are valid at the frequency indicated,
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Certifique No: D2600V2-1005 Jan 16

Page 2 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 327 of 347

Measurement Conditions

DASY system configuration, as far as not given on nane 1

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mha/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.3 ± 6 %	2.04 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	884	

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 16.5 % (k=2)

Body TSL parameters

s and calculations were applied.

The following parameters and edicatations were applied.			
	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.6 ± 6 %	2.22 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.7 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	53.9 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.2 W/kg ± 16.5 % (k=2)

Certificate No: D2600V2-1005_Jan16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 328 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.2 Ω - 4.2 jΩ
Return Loss	- 27.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.6 Ω - 3.3 <u>j</u> Ω
Return Loss	- 24.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.154 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 23, 2006

Certificate No: D2600V2-1005_Jan16 Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 329 of 347

DASY5 Validation Report for Head TSL

Date: 21.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1005

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.04 \text{ S/m}$; $s_r = 37.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

Probe: EX3DV4 - SN7349; ConvF(7.49, 7.49, 7.49); Calibrated: 31.12.2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 30.12,2015


Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 114.8 V/m; Power Drift = 0.01 dB. Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.29 W/kgMaximum value of SAR (measured) = 24.0 W/kg

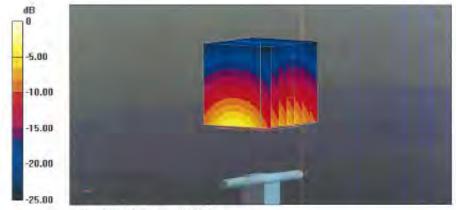

0 dB = 24.0 W/kg = 13.80 dBW/kg

Certificate No: D2600V2-1005_Jan16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be


prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 330 of 347

Impedance Measurement Plot for Head TSL

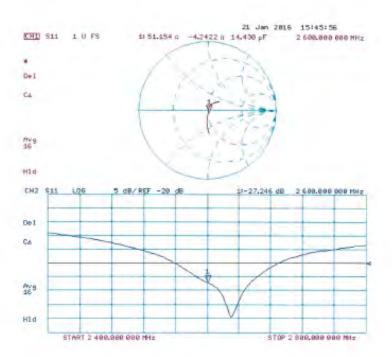

Certificate No: D2600V2-1005 Jan16 Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 331 of 347

DASY5 Validation Report for Body TSL

Date: 21.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1005

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.22 \text{ S/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

Probe: EX3DV4 - SN7349; ConvF(7.6, 7.6, 7.6); Calibrated: 31.12.2015;

Sensor-Surface; 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 30.12.2015

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 106.7 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 28.4 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.1 W/kgMaximum value of SAR (measured) = 22.8 W/kg



0 dB = 22.8 W/kg = 13.58 dBW/kg

Certificate No: D2600V2-1005_Jan16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 332 of 347

Impedance Measurement Plot for Body TSL

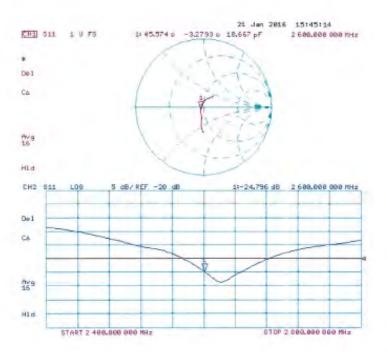

Certificate No: D2600V2-1005_Jan16 Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 333 of 347

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schwetzertscher Kallenerdiens
C Service susse d'étalonnege
Servizie evizzere di terature
S Swiss Calibration Service

Accledited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No. D5GHzV2-1023 Jan16

CALIBRATION CERTIFICATE D5GHzV2 - SN: 1023 Calibration procedure(s) QA CAL-22.V2 Calibration procedure for dipole validation kits between 3-6 GHz January 26, 2016 Calibration date: This carioration certificate documents the traceability to national stendards, which realize the physical units of measurements (Si) The measurements and the uncontainties with confidence probability are given on the following pages and are cart of the certificate, All collorations have been conducted in the closed laboratory facility: environment temperature (22 s. 91°C and frumidity < 70%). Calibration Equipment used (M&TE critical for calibration) Scheduled Calibration Cai Date (Certificate No.) Primary Standards GB37480704 Power meter EPM-442A 07-Oct-15 (No. 217-02222) Power sensor HP 8461A US37292783 07-Oct-15 (No. 217-02222) Oct-16 Power sensor HP 8481A MY41092317 07-Oct-15 (No. 217-02223) Oct-16 Reference 20 dB Attenuator SN: 5055 (20k) 01-Apr-15 (No. 217-02131) Mar-16 Type-N mismatch combination SN: 5047.2 / 06327 01-Apr-15 (No. 217-02134) May-16 Reference Probe EX3DV4 SM 3503 31 Dec-15 (No. EX3-3503_Dec (5) Dec-16 DAE4 SN. 601 30-Dec-15 (No. DAE4-601_Dec-15) Dec-16 Scheduled Check Secondary Standards Check Date (in house) 15-Jun-15 (in house shack Jun-15) In house check, Jun-18 RF generator R&S SMT-06 100972 In house check: Oct-16 HS37390585-\$4206 18-Oct-01 (in house check Oct-15) Nelwork Analyzar HP 8753E Function Name Laboratory Technician Calibrated by Michael Weber Kata Poković Technical Manager Approved by issued: January 28, 2018 This calibration cartificate shall not be reproduced except in full without written approval of the incoratory

Centicale No: 05GHzV2-1023_Jan16

Page 1 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 334 of 347

Calibration Laboratory of

Schmid & Partner Engineering AG serann til nood Zurich, Switzerland





Service suisse d'étalonnage Servizio evizzero di teretura Swee Callington Service

Accreditation No.: SCS 0108

Accurated by the Switte Accuration on Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilatoral Agreement for the recognition of colloration certificates

Glossary:

TSL

tissue simulating liquid

ConvF N/A

sunsitivity in TSL / NORM x,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-2, *Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30. MHz to 6 GHz)", March 2010
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the cartificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Fixed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The Impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. D5GHzV2-1023_Jan16

Page 2 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 335 of 347

Measurement Conditions

DASY system configuration, as far as not given on page 1

mo i systemi comiguration, as iai as ik	at Street on bade 1:	
DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5600 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 m/no/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.51 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.74 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan16

Page 3 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 336 of 347

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.1 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	4.90 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan16

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 337 of 347

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.10 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ⁵ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan16

Page 5 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 338 of 347

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.1 ± 6 %	5.37 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	71.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.50 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.1 W/kg ± 19.9 % (k=2)

SA	AR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SA	AR measured	100 mW input power	2.14 W/kg
SA	AR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 19.5 % (k=2)

Certificate No: D6GHzV2-1023_Jan16

Page 6 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 339 of 347

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.91 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.89 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm² (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.19 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023 Jan16

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 340 of 347

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	49.1 Ω - 8.4 jΩ
Return Loss	- 21.4 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	49.6 Ω · 4.2 jΩ
Return Loss	- 27.4 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	54.9 Ω - 1.4 jΩ
Return Loss	- 26.3 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.9 Ω + 2.2 jΩ
Return Loss	- 24.5 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to	feed point	49.4 Ω - 6.8 jΩ
Return Loss		- 23.3 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	50.9 Ω - 2.4 jΩ
Return Loss	- 31.8 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	56.0 Ω - 0.1 jΩ
Return Loss	- 25.0 dB

Certificate No: D5GHzV2-1023_Jan16

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 341 of 347

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.4 Ω + 2.4 jΩ
Return Loss	- 23.8 dB

General Antenna Parameters and Design

ı	Electrical Delay (one direction)	1.199 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004

Certificate No: D5GHzV2-1023_Jan16 Page 9 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 342 of 347

DASY5 Validation Report for Head TSL

Date: 26.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1023

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 4.51 \text{ S/m}$; $\varepsilon_r = 35.2$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: f = 5300 MHz; $\sigma = 4.6$ S/m; $\epsilon_r = 35.1$; $\rho = 1000$ kg/m³, Medium parameters used: f = 5600 MHz; $\sigma = 1000$ kg/m³, Medium parameters used: $\sigma = 1000$ kg/m³, $\sigma = 1000$ kg/m³, Medium parameters used: $\sigma = 1000$ kg/m³, $\sigma = 1000$ kg/m³, Medium parameters used: $\sigma = 1000$ kg/m³, $\sigma = 1000$ kg/m³, $\sigma = 1000$ kg/m³, Medium parameters used: $\sigma = 1000$ kg/m³, $\sigma =$ 4.9 S/m; $\varepsilon_r = 34.7$; $\rho = 1000$ kg/m³, Medium parameters used: f = 5800 MHz; $\sigma = 5.1$ S/m; $\varepsilon_r = 34.4$; $\rho = 5.1$ S/m; $\varepsilon_r = 5.1$ S/m; $\varepsilon_r = 34.4$; $\rho = 5.1$ S/m; $\varepsilon_r = 5.1$ 1000 kg/m3

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.59, 5.59, 5.59); Calibrated: 31.12.2015, ConvF(5.25, 5.25, 5.25); Calibrated: 31.12.2015, ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.95, 4.95, 4.95); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Scrial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.68 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.14 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.32 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.38 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

Certificate No: D5GHzV2-1023 Jan16

Page 10 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 343 of 347

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.15 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

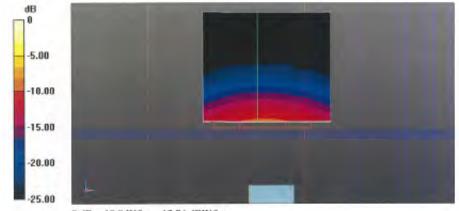

0 dB = 18.8 W/kg = 12.74 dBW/kg

Certificate No: D5GHzV2-1023_Jan16

Page 11 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 344 of 347

Impedance Measurement Plot for Head TSL

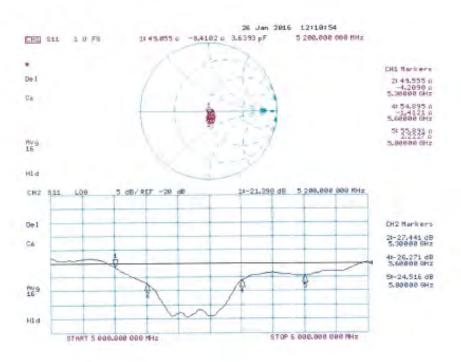

Certificate No: D6GHzV2-1023_Jan16

Page 12 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 345 of 347

DASY5 Validation Report for Body TSL

Date: 25.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1023

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600

MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 5.37 \text{ S/m}$; $\varepsilon = 47.1$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: f = 5300 MHz; $\sigma = 5.5 \text{ S/m}$; $\epsilon_f = 46.9$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: f = 5600 MHz; $\sigma =$ 5.91 S/m; ϵ_c = 46.4; ρ = 1000 kg/m³, Medium parameters used: f = 5800 MHz; σ = 6.19 S/m; ϵ_c = 46; ρ = 1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.75, 4.75, 4.75); Calibrated: 31.12.2015, ConvF(4.35, 4.35, 4.35); Calibrated: 31.12.2015, ConvF(4.27, 4.27, 4.27); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.72 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 7.25 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 16.8 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.43 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.67 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

Certificate No: D6GHzV2-1023_Jan16

Page 13 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 346 of 347

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

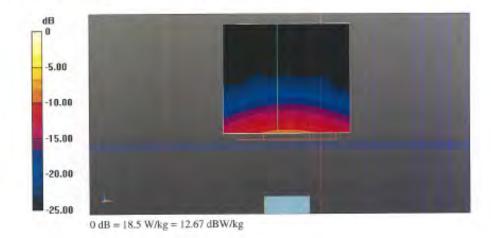

Certificate No: D5GHzV2-1023_Jan16

Page 14 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 347 of 347

Impedance Measurement Plot for Body TSL

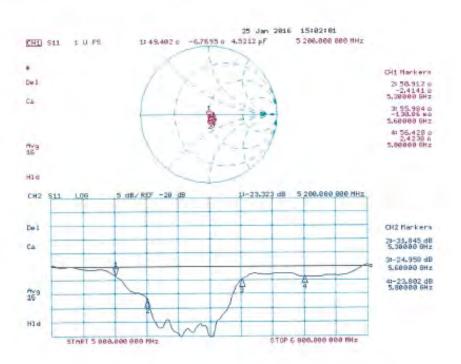

Certificate No: D5GHzV2-1023_Jan16

Page 15 of 15

- End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有説明,此報告結果僅對測試乙樣品負責,同時此樣品僅保留90大。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.