



RADIO TEST REPORT

Test Report No. : 13665469H-B


Applicant : DENSO TEN Limited
Type of EUT : Car Navigation
Model Number of EUT : FT0091A
FCC ID : BABFT0091A
Test regulation : **FCC Part 15 Subpart C: 2021**
*Bluetooth parts
(20dB Bandwidth, 99%Occupied Bandwidth and Carrier
Frequency Separation, Duty cycle correction factor, Radiated
Spurious Emission and Conducted Spurious Emission)
*For permissive change

Test Result : **Complied (Refer to SECTION 3)**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in Section 1.

Date of test: January 18 and February 7, 2021

Representative test engineer:


Yuichiro Yamazaki
Engineer
Consumer Technology Division

Approved by:


Tsubasa Takayama
Leader
Consumer Technology Division



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

REVISION HISTORY

Original Test Report No.: 13665469H-B

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13665469H-B	March 22, 2021	-	-

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of EUT during testing.....	11
SECTION 5: Radiated Spurious Emission	14
SECTION 6: Antenna Terminal Conducted Tests.....	16
APPENDIX 1: Test data	17
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation	17
Burst Rate Confirmation	20
Duty cycle correction factor.....	21
Radiated Spurious Emission	22
Conducted Spurious Emission	33
Conducted Emission Band Edge compliance	39
APPENDIX 2: Test instruments	41
APPENDIX 3: Photographs of test setup	43
Radiated Spurious Emission	43
Antenna Terminal Conducted Tests.....	44

SECTION 1: Customer information

Company Name	:	DENSO TEN Limited
Address	:	2-28, Gosho-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 JAPAN
Telephone Number	:	+81-78-682-2159
Facsimile Number	:	+81-78-671-7160
Contact Person	:	Daisuke Fukii

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type	:	Car Navigation
Model Number	:	FT0091A
Serial Number	:	Refer to SECTION 4.2
Rating	:	DC 12 V
Receipt Date	:	January 15, 2021
Country of Mass-production	:	Mexico
Condition	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	:	No Modification by the test lab.

2.2 Product Description

Model: FT0091A (referred to as the EUT in this report) is a Car Navigation.

Radio Specification

Radio Type : Transceiver

Clock frequency(ies) : 26 MHz

	IEEE802.11b *1)	IEEE802.11g/n (20 M band) *1)	IEEE802.11a/n (20 M band)	IEEE802.11n (40 M band)
Frequency of operation	2412 MHz - 2462 MHz	2412 MHz - 2462 MHz	5180 MHz - 5240 MHz 5260 MHz - 5320 MHz 5500 MHz - 5700 MHz 5745 MHz - 5825 MHz	5190 MHz - 5230 MHz 5270 MHz - 5310 MHz 5510 MHz - 5670 MHz 5755 MHz - 5795 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK, 256QAM)	
Channel spacing	5MHz		20MHz	40MHz
Antenna type	Surface Mountable Dielectric Chip Antenna			
Antenna Connector type	-			
Antenna Gain	1.6 dBi (2.4 GHz Band), 0 dBi (5 GHz Band)			

	Bluetooth Ver.3.0 with EDR function
Frequency of operation	2402 MHz - 2480 MHz
Type of modulation	BT: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Channel spacing	1 MHz
Antenna type	Surface Mountable Dielectric Chip Antenna
Antenna Connector type	-
Antenna Gain	1.6 dBi

*1) This test report applies to Bluetooth part.

*Wireless LAN and Bluetooth do not transmit simultaneously.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on January 12, 2021 and effective February 11, 2021
* The revision does not affect the test result conducted before its effective date.

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

* This test report is due to change of the crystal in the EUT.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ----- ISED: RSS-Gen 8.8	FCC: Section 15.207 ----- ISED: RSS-Gen 8.8	-	N/A	*1)
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ----- ISED: RSS-247 5.1 (b)	See data.	Complied a)	Conducted
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ----- ISED: RSS-247 5.1 (a)		Complied a)	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ----- ISED: RSS-247 5.1 (d)		N/A	*2)
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ----- ISED: RSS-247 5.1 (d)		N/A	*2)
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(a)(b)(1) ----- ISED: RSS-247 5.4 (b)		N/A	*2)
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ----- ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	7.3 dB 156.002 MHz, QP, Vert.	Complied b) / c)	Conducted/ Radiated (above 30 MHz) *3)
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422. *1) The test was not performed since the EUT was DC device. *2) The purpose of this test is to verify that the degradation and performance meets the minimum adaptable requirements, therefore, only items related to the x'tal were tested. This test item is controlled by software there is no "degradation" *3) Radiated test was selected over 30 MHz based on section 15.247(d). a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation) b) Refer to APPENDIX 1 (data of Conducted Spurious Emission) c) Refer to APPENDIX 1 (data of Radiated Spurious Emission) Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.					

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF Part regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) a)Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.4 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.6 dB

Conducted emission

using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.4 dB
	0.15 MHz to 30 MHz	2.9 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	5.0 dB
	200 MHz to 1000 MHz (Horizontal)	5.2 dB
	(Vertical)	6.3 dB
10 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	4.8 dB
	200 MHz to 1000 MHz (Horizontal)	5.0 dB
	(Vertical)	5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 199967

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Spurious Emission (Conducted/Radiated)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping Off	2402 MHz 2441 MHz 2480 MHz

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length
 *2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.
 * It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.

*EUT has the power settings by the software as follows;

Power settings: BDR: OX=07

EDR: OX=07

Software: Version 00.01F

(Date: January 6, 2021, Storage location: EUT memory)


*This setting of software is the worst case.

Any conditions under the normal use do not exceed the condition of setting.

In addition, end users cannot change the settings of the output power of the product.

4.2 Configuration and peripherals

Radiated Spurious Emission test

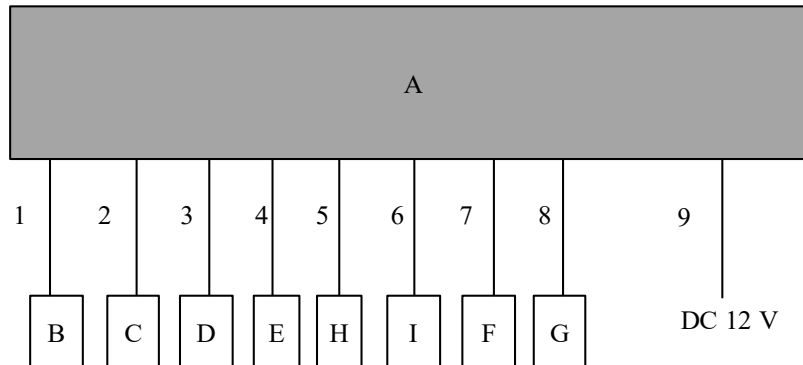

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Navigation	FT0091A	MSC00010	DENSO TEN Limited	EUT
B	Antenna	16ADA	No.1	HONDA Genuine product	-
C	Radio dummy	39835-T5A-E010-M1	24D50094	-	-
D	Camera	8983980530	0000015	HONDA Genuine product	-
E	MIC ASSY	W01B-5012-D240	03U1520000026	TRANSTRON INC.	-
F	Dummy load	-	-	DENSO TEN Limited	-
G	Switch	-	-	DENSO TEN Limited	-
H	USB memory	USM4GR B	-	Sony	-
I	USB memory	USM4GR B	-	Sony	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna Cable	0.6	Shielded	Shielded	-
2	Antenna Cable	0.5	Shielded	Shielded	-
3	Signal Cable	0.6	Unshielded	Unshielded	-
4	Signal Cable	0.5	Unshielded	Unshielded	-
5	USB Cable	1.0	Shielded	Shielded	-
6	USB Cable	1.0	Shielded	Shielded	-
7	Signal Cable	0.5	Unshielded	Unshielded	-
8	Signal Cable	1.0	Unshielded	Unshielded	-
9	DC Cable	1.5	Unshielded	Unshielded	-

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Antenna Terminal Conducted tests

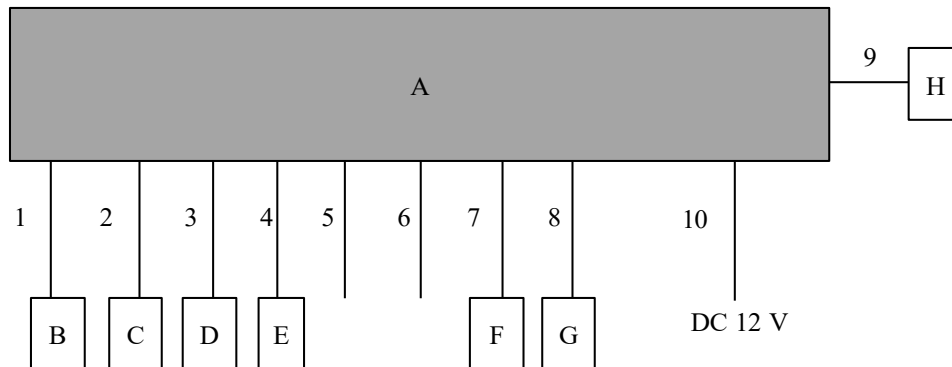

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Navigation	FT0091A	MSC00011	DENSO TEN Limited	EUT
B	Antenna	16ADA	No.1	HONDA Genuine product	-
C	Radio dummy	39835-T5A-E010-M1	24D50094	-	-
D	Camera	8983980530	0000015	HONDA Genuine product	-
E	MIC ASSY	W01B-5012-D240	03U1520000026	TRANSTRON INC.	-
F	Dummy load	-	-	DENSO TEN Limited	-
G	Switch	-	-	DENSO TEN Limited	-
H	Jig board	-	-	DENSO TEN Limited	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna Cable	0.6	Shielded	Shielded	-
2	Antenna Cable	0.5	Shielded	Shielded	-
3	Signal Cable	0.6	Unshielded	Unshielded	-
4	Signal Cable	0.5	Unshielded	Unshielded	-
5	USB Cable	1.0	Shielded	Shielded	-
6	USB Cable	1.0	Shielded	Shielded	-
7	Signal Cable	0.5	Unshielded	Unshielded	-
8	Signal Cable	1.0	Unshielded	Unshielded	-
9	Signal Cable	0.1	Unshielded	Unshielded	-
10	DC Cable	0.5	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

Figure 2: Test Setup


Below 1 GHz

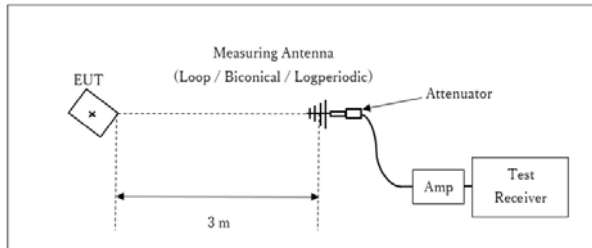

x : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

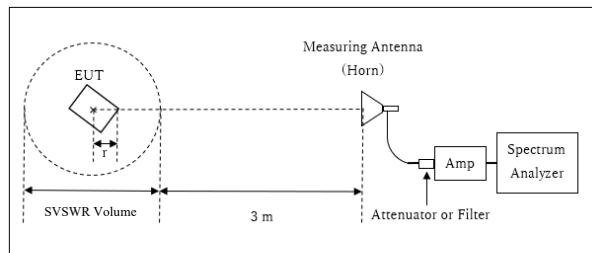

r : Radius of an outer periphery of EUT

x : Center of turn table

Distance Factor: $20 \times \log (3.9 \text{ m} / 3.0 \text{ m}) = 2.28 \text{ dB}$


* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.9 \text{ m}$

SVSWR Volume : 2.0 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.1 \text{ m}$

10 GHz - 26.5 GHz

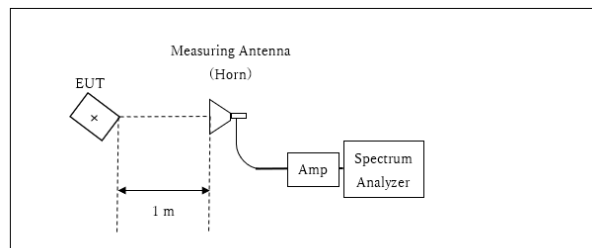

x : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

*Test Distance: 1 m

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz

Test data : APPENDIX

Test result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold *1)	Spectrum Analyzer
Carrier Frequency Separation	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Conducted Spurious Emission *2) *3)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) The measurement was performed with Max Hold since the duty cycle was not 100 %.

*2) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.
Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).

*3) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

20dB Bandwidth, 99% Occupied Bandwidth and Carrier Frequency Separation


Report No. 13665469H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 18, 2021
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx, Hopping Off,

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	99% Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.922	842.281	1.000	≥ 0.615
DH5	2441.0	0.840	834.373	1.000	≥ 0.560
DH5	2480.0	0.844	833.446	1.000	≥ 0.563
3DH5	2402.0	1.282	1174.4	1.000	≥ 0.855
3DH5	2441.0	1.281	1174.8	1.000	≥ 0.854
3DH5	2480.0	1.281	1175.1	1.000	≥ 0.854

Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).

No limit applies to 20dB Bandwidth.

20dB Bandwidth and 99% Occupied Bandwidth

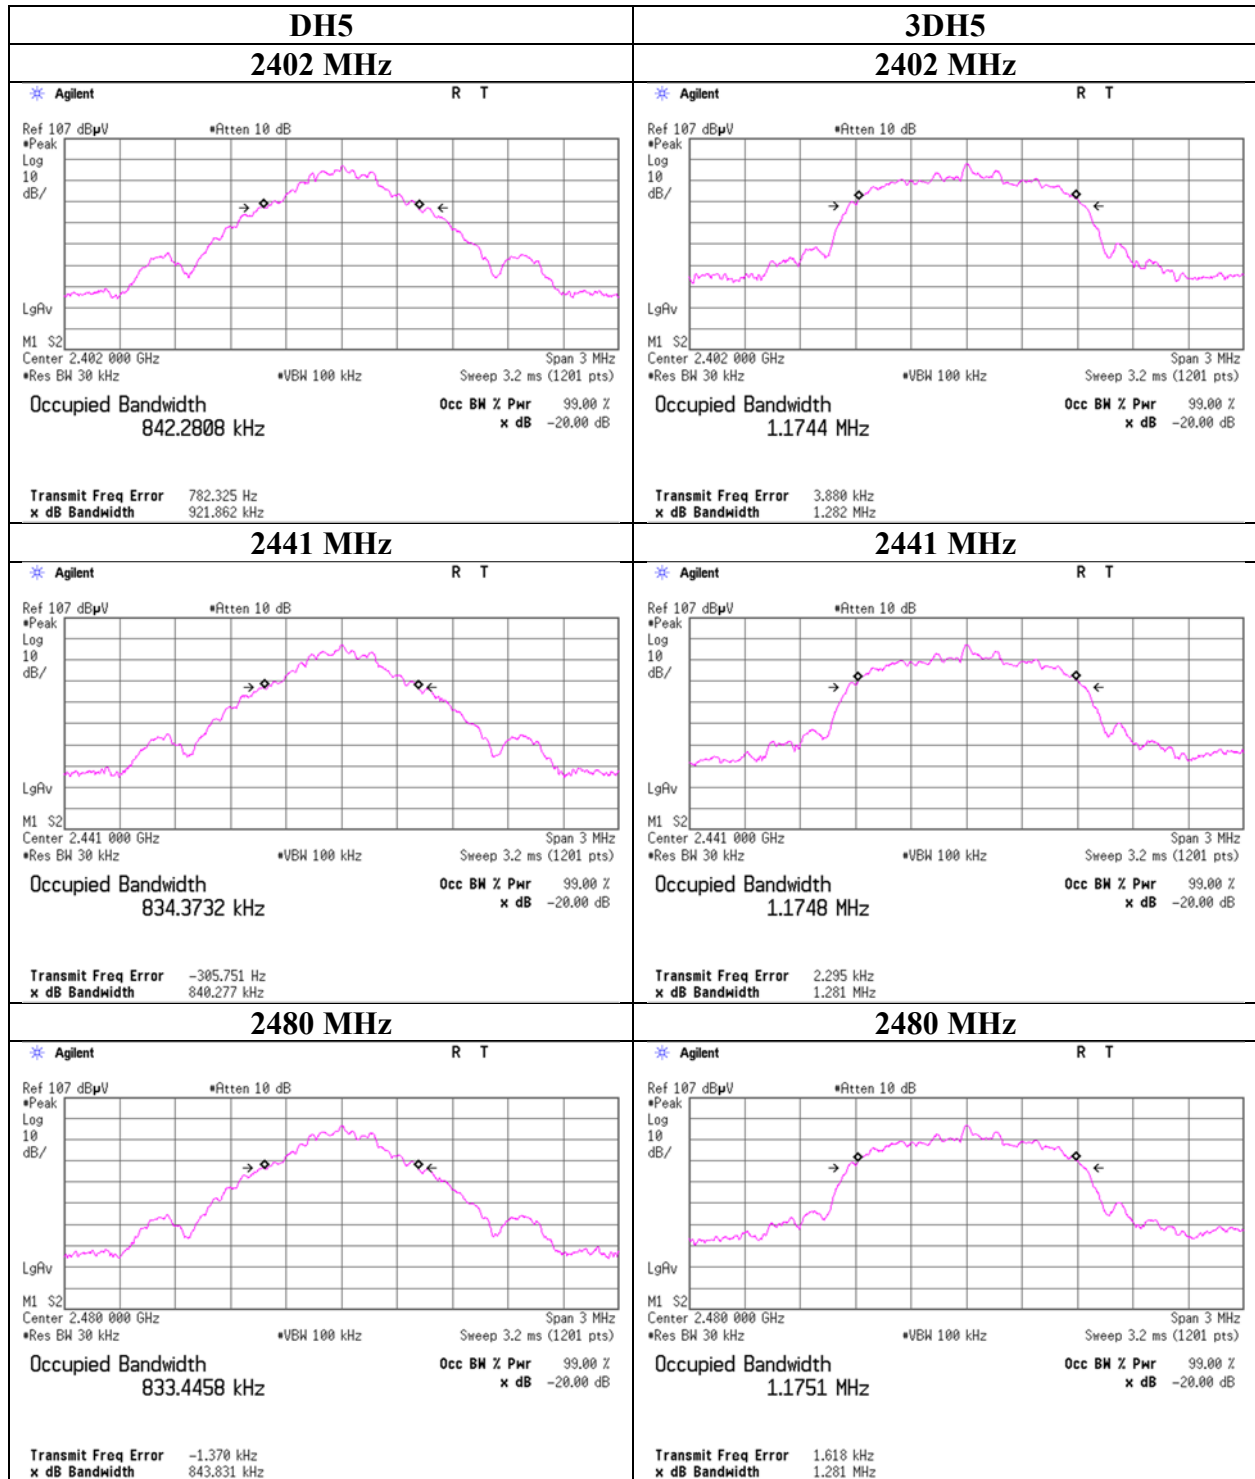

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Carrier Frequency Separation

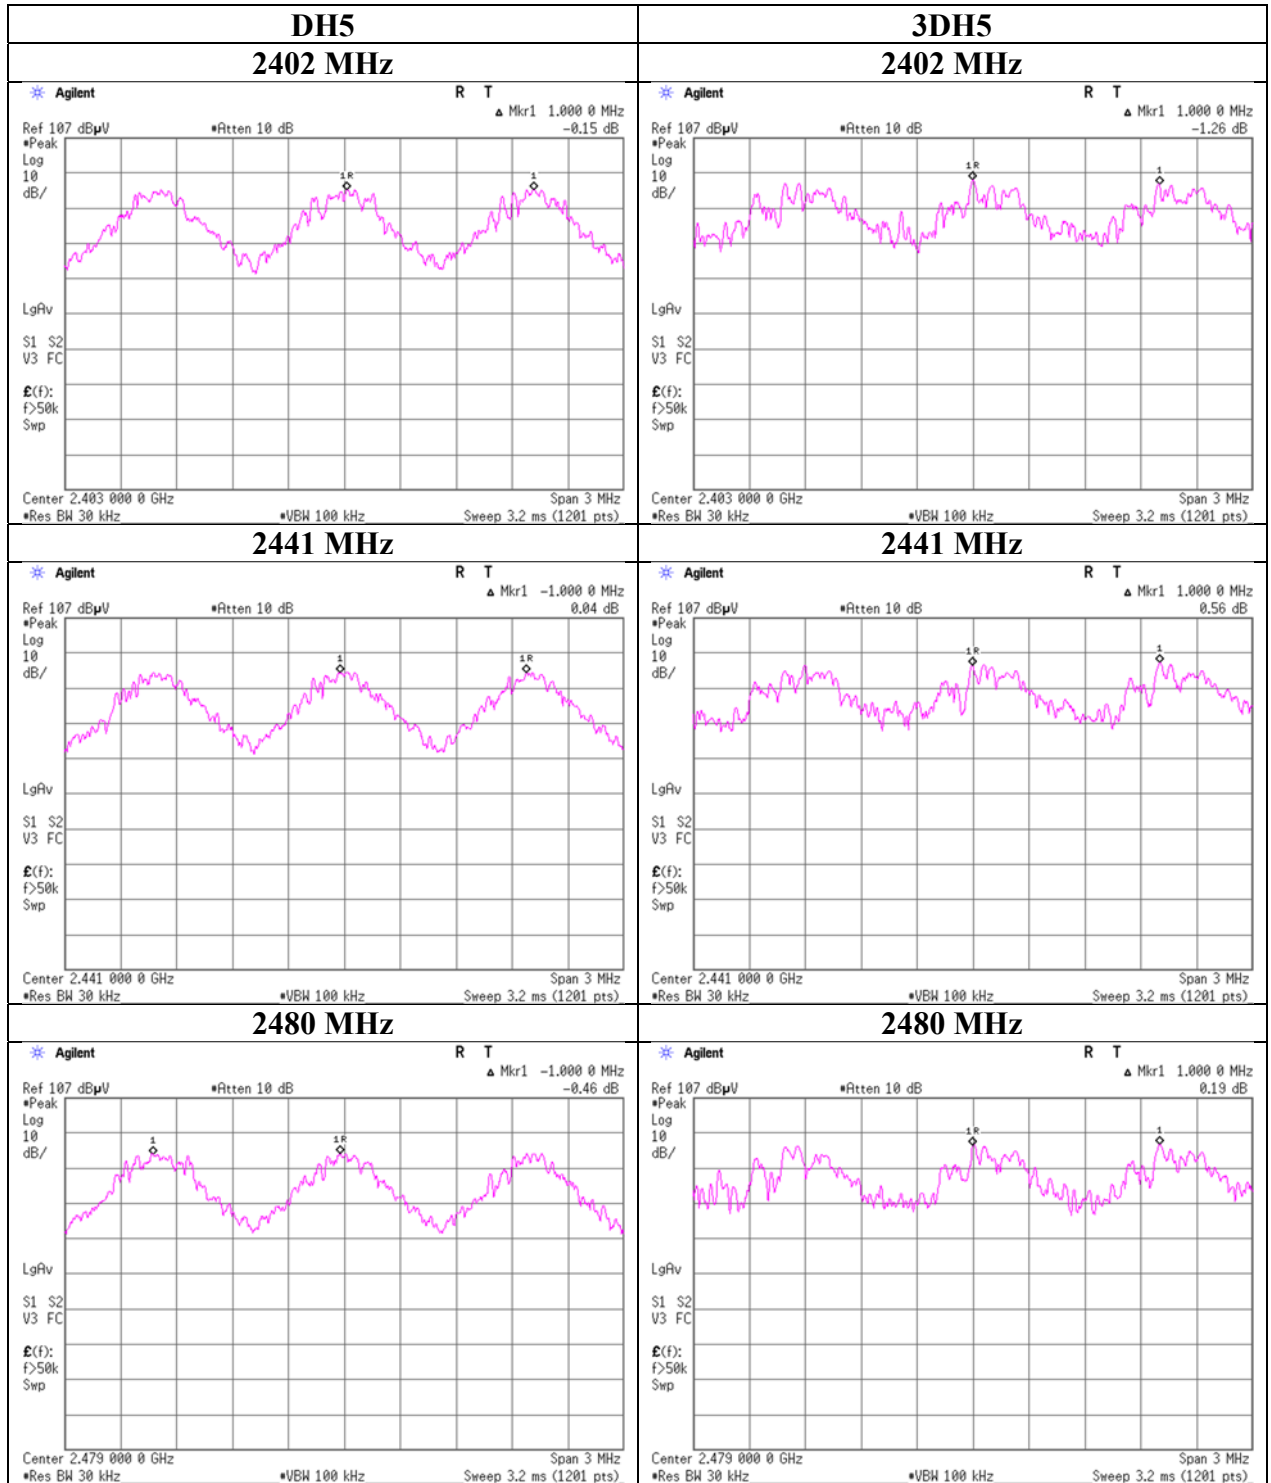

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Burst Rate Confirmation

Report No. 13665469H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 18, 2021
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx, Hopping Off


DH5

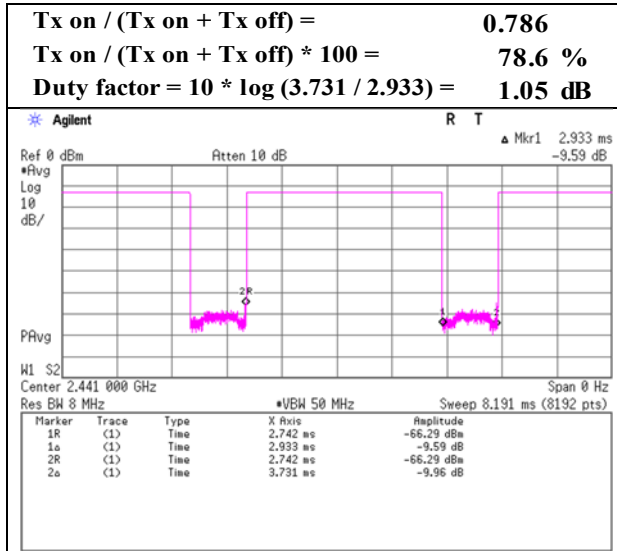

2DH5

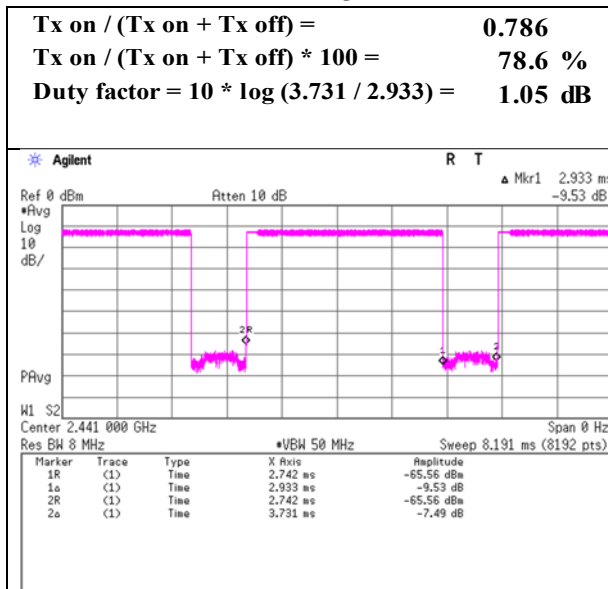


3DH5

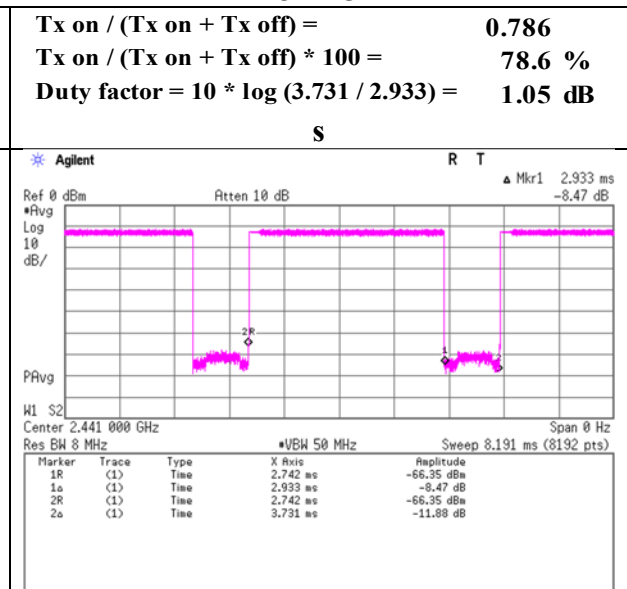

Duty cycle correction factor

Report No.	13665469H
Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Date	February 7, 2021
Temperature / Humidity	20 deg. C / 34 % RH
Engineer	Tomohisa Nakagawa
Mode	Tx, Hopping On

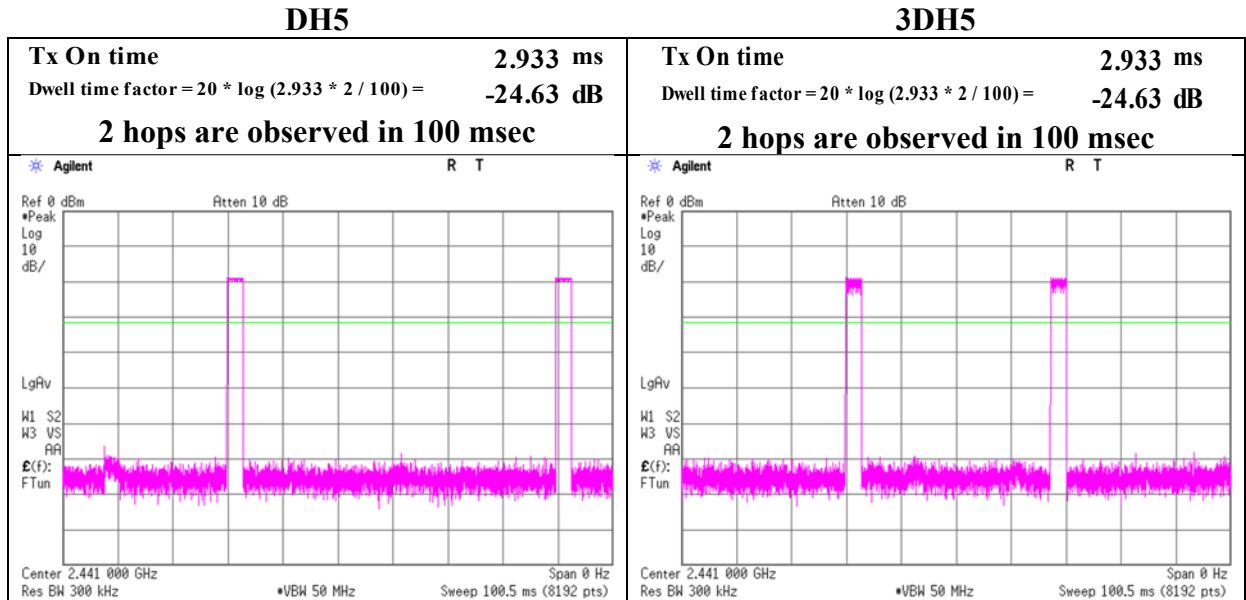

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date February 7, 2021 February 7, 2021
(Day) (Night)
Temperature / Humidity 20 deg. C / 34 % RH 22 deg. C / 28 % RH
Engineer Tomohisa Nakagawa Yuichiro Yamazaki
(1 GHz -10 GHz) (Above 10 GHz)
(Below 1 GHz)
Mode Tx, Hopping Off, DH5 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	156.002	QP	43.0	15.2	8.5	32.0	-	34.7	43.5	8.8	
Hori.	188.003	QP	41.9	16.2	8.7	31.9	-	34.9	43.5	8.6	
Hori.	577.998	QP	33.6	18.6	11.1	32.1	-	31.2	46.0	14.8	
Hori.	650.248	QP	34.6	19.2	11.4	32.1	-	33.1	46.0	12.9	
Hori.	791.349	QP	32.0	20.6	11.9	31.7	-	32.9	46.0	13.2	
Hori.	873.616	QP	30.9	21.8	12.3	31.3	-	33.7	46.0	12.3	
Hori.	2390.000	PK	42.6	27.8	5.3	31.8	-	43.8	73.9	30.1	
Hori.	4804.000	PK	40.2	31.6	7.5	31.2	-	48.1	73.9	25.9	Floor noise
Hori.	7206.000	PK	48.2	36.5	8.7	32.4	-	61.0	73.9	12.9	
Hori.	9608.000	PK	41.0	38.0	9.4	32.6	-	55.9	73.9	18.1	Floor noise
Hori.	2390.000	AV	33.8	27.8	5.3	31.8	1.1	36.1	53.9	17.8	*1)
Hori.	4804.000	AV	32.9	31.6	7.5	31.2	-	40.7	53.9	13.2	Floor noise
Hori.	9608.000	AV	33.3	38.0	9.4	32.6	-	48.1	53.9	5.8	Floor noise
Vert.	156.002	QP	44.4	15.2	8.5	32.0	-	36.1	43.5	7.4	
Vert.	171.996	QP	33.2	15.7	8.6	31.9	-	25.6	43.5	17.9	
Vert.	577.998	QP	36.5	18.6	11.1	32.1	-	34.1	46.0	11.9	
Vert.	650.248	QP	36.6	19.2	11.4	32.1	-	35.1	46.0	10.9	
Vert.	722.498	QP	36.0	20.0	11.7	32.1	-	35.7	46.0	10.3	
Vert.	873.616	QP	31.7	21.8	12.3	31.3	-	34.5	46.0	11.5	
Vert.	2390.000	PK	41.9	27.8	5.3	31.8	-	43.1	73.9	30.8	
Vert.	4804.000	PK	41.2	31.6	7.5	31.2	-	49.1	73.9	24.8	Floor noise
Vert.	7206.000	PK	48.4	36.5	8.7	32.4	-	61.2	73.9	12.7	
Vert.	9608.000	PK	41.4	38.0	9.4	32.6	-	56.2	73.9	17.7	Floor noise
Vert.	2390.000	AV	33.7	27.8	5.3	31.8	1.1	36.0	53.9	17.9	*1)
Vert.	4804.000	AV	31.4	31.6	7.5	31.2	-	39.3	53.9	14.6	Floor noise
Vert.	9608.000	AV	31.9	38.0	9.4	32.6	-	46.7	53.9	7.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

***Above results have sufficient margin without taking account Duty cycle correction factor.**

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402	PK	88.2	27.83	5.29	31.84	89.5	-	-	Carrier
Hori.	2400	PK	35.2	27.83	5.29	31.84	36.5	69.5	33.0	
Vert.	2402	PK	84.8	27.83	5.29	31.84	86.1	-	-	Carrier
Vert.	2400	PK	34.9	27.83	5.29	31.84	36.2	66.1	29.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	7206.000	AV	42.7	36.5	8.7	32.4	-24.6	30.9	53.9	23.0	*
Vert.	7206.000	AV	40.6	36.5	8.7	32.4	-24.6	28.8	53.9	25.1	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	13665469H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	February 7, 2021 (Day)
Temperature / Humidity	20 deg. C / 34 % RH
Engineer	Tomohisa Nakagawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

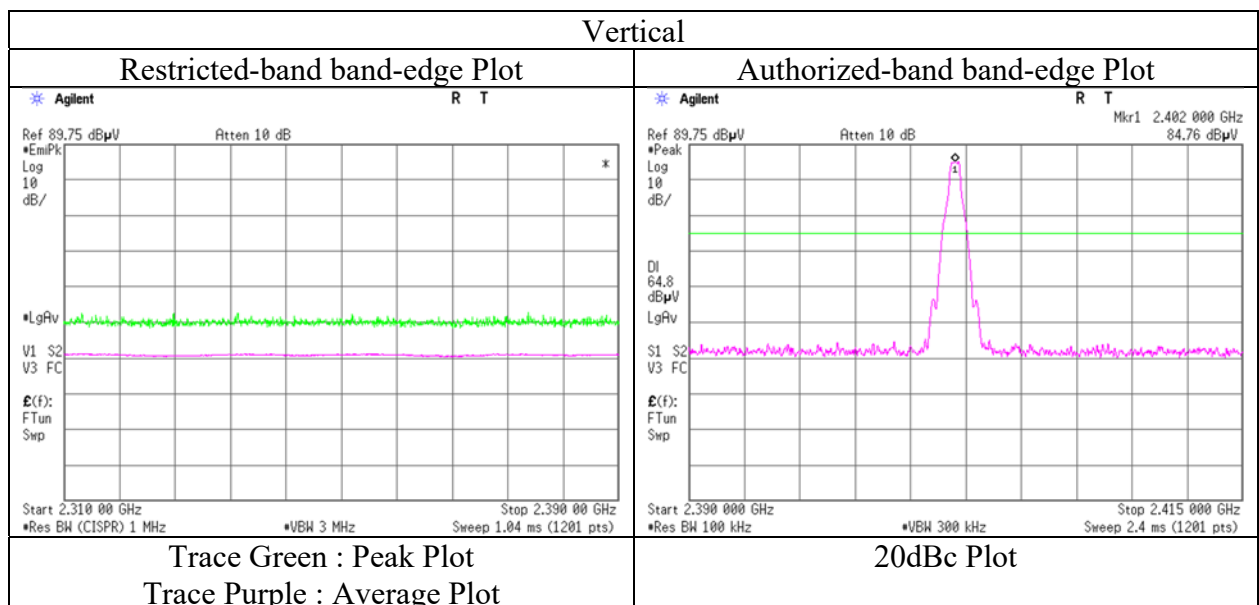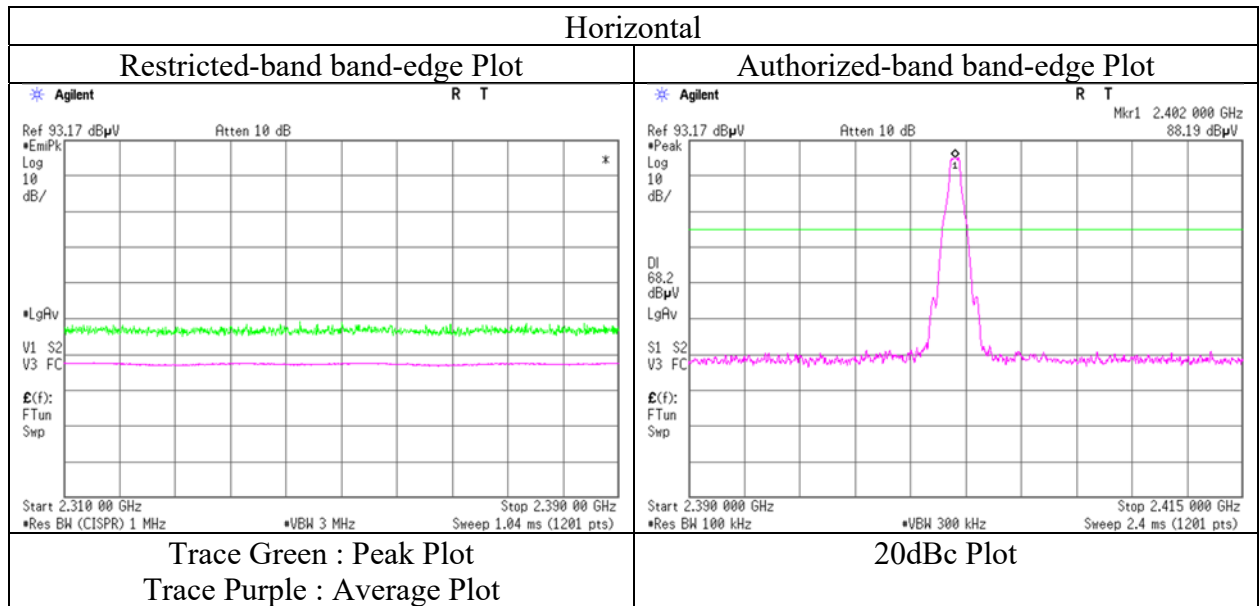

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date February 7, 2021 (Day) February 7, 2021 (Night)
Temperature / Humidity 20 deg. C / 34 % RH 22 deg. C / 28 % RH
Engineer Tomohisa Nakagawa Yuichiro Yamazaki
(1 GHz -10 GHz) (Above 10 GHz)
(Below 1 GHz)
Mode Tx, Hopping Off, DH5 2441 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	156.002	QP	42.5	15.2	8.5	32.0	-	34.2	43.5	9.3	
Hori.	188.003	QP	42.0	16.2	8.7	31.9	-	35.0	43.5	8.5	
Hori.	577.998	QP	35.3	18.6	11.1	32.1	-	32.9	46.0	13.1	
Hori.	650.248	QP	34.4	19.2	11.4	32.1	-	32.9	46.0	13.1	
Hori.	791.349	QP	32.1	20.6	11.9	31.7	-	33.0	46.0	13.1	
Hori.	873.616	QP	30.7	21.8	12.3	31.3	-	33.5	46.0	12.5	
Hori.	4882.000	PK	41.7	31.6	7.5	31.2	-	49.6	73.9	24.3	Floor noise
Hori.	7323.000	PK	45.0	36.6	8.7	32.4	-	57.8	73.9	16.1	
Hori.	9764.000	PK	40.6	38.4	9.4	32.7	-	55.7	73.9	18.2	Floor noise
Hori.	4882.000	AV	40.0	31.6	7.5	31.2	-	47.8	53.9	6.1	Floor noise
Hori.	9764.000	AV	32.9	38.4	9.4	32.7	-	48.0	53.9	5.9	Floor noise
Vert.	156.002	QP	44.2	15.2	8.5	32.0	-	35.9	43.5	7.6	
Vert.	171.996	QP	33.5	15.7	8.6	31.9	-	25.9	43.5	17.6	
Vert.	577.998	QP	36.5	18.6	11.1	32.1	-	34.1	46.0	11.9	
Vert.	650.248	QP	36.5	19.2	11.4	32.1	-	35.0	46.0	11.0	
Vert.	722.498	QP	36.0	20.0	11.7	32.1	-	35.7	46.0	10.3	
Vert.	873.616	QP	31.7	21.8	12.3	31.3	-	34.5	46.0	11.5	
Vert.	4882.000	PK	41.2	31.6	7.5	31.2	-	49.1	73.9	24.9	Floor noise
Vert.	7323.000	PK	47.1	36.6	8.7	32.4	-	59.9	73.9	14.0	
Vert.	9764.000	PK	41.0	38.4	9.4	32.7	-	56.2	73.9	17.7	Floor noise
Vert.	4882.000	AV	32.4	31.6	7.5	31.2	-	40.3	53.9	13.6	Floor noise
Vert.	9764.000	AV	33.7	38.4	9.4	32.7	-	48.9	53.9	5.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(3.9 m / 3.0 m) = 2.28 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

***Above results have sufficient margin without taking account Duty cycle correction factor.**

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	7323.000	AV	39.0	36.6	8.7	32.4	-24.6	27.3	53.9	26.6	*
Vert.	7323.000	AV	41.6	36.6	8.7	32.4	-24.6	29.8	53.9	24.1	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz 20log(3.9 m / 3.0 m) = 2.28 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date February 7, 2021 (Day) February 7, 2021 (Night)
Temperature / Humidity 20 deg. C / 34 % RH 22 deg. C / 28 % RH
Engineer Tomohisa Nakagawa (1 GHz -10 GHz) Yuichiro Yamazaki (Above 10 GHz)
Mode Tx, Hopping Off, DH5 2480 MHz (Below 1 GHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	156.002	QP	42.5	15.2	8.5	32.0	-	34.2	43.5	9.3	
Hori.	188.003	QP	41.9	16.2	8.7	31.9	-	34.9	43.5	8.6	
Hori.	577.998	QP	35.4	18.6	11.1	32.1	-	33.0	46.0	13.0	
Hori.	650.248	QP	34.6	19.2	11.4	32.1	-	33.1	46.0	12.9	
Hori.	791.349	QP	32.2	20.6	11.9	31.7	-	33.1	46.0	13.0	
Hori.	873.616	QP	30.8	21.8	12.3	31.3	-	33.6	46.0	12.4	
Hori.	2483.500	PK	42.9	27.7	5.4	31.8	-	44.1	73.9	29.8	
Hori.	4960.000	PK	40.1	31.6	7.5	31.2	-	48.0	73.9	25.9	Floor noise
Hori.	7440.000	PK	44.5	36.7	8.7	32.5	-	57.5	73.9	16.4	
Hori.	9920.000	PK	40.9	38.6	9.5	32.7	-	56.2	73.9	17.7	Floor noise
Hori.	2483.500	AV	31.4	27.7	5.4	31.8	1.1	33.7	53.9	20.2	*1)
Hori.	4960.000	AV	29.7	31.6	7.5	31.2	-	37.6	53.9	16.3	Floor noise
Hori.	9920.000	AV	31.5	38.6	9.5	32.7	-	46.8	53.9	7.1	Floor noise
Vert.	156.002	QP	44.5	15.2	8.5	32.0	-	36.2	43.5	7.3	
Vert.	171.996	QP	33.6	15.7	8.6	31.9	-	26.0	43.5	17.5	
Vert.	577.998	QP	36.8	18.6	11.1	32.1	-	34.4	46.0	11.6	
Vert.	650.248	QP	36.6	19.2	11.4	32.1	-	35.1	46.0	10.9	
Vert.	722.498	QP	36.3	20.0	11.7	32.1	-	36.0	46.0	10.0	
Vert.	873.616	QP	31.5	21.8	12.3	31.3	-	34.3	46.0	11.7	
Vert.	2483.500	PK	42.7	27.7	5.4	31.8	-	43.9	73.9	30.0	
Vert.	4960.000	PK	39.9	31.6	7.5	31.2	-	47.8	73.9	26.1	Floor noise
Vert.	7440.000	PK	45.0	36.7	8.7	32.5	-	57.9	73.9	16.0	
Vert.	9920.000	PK	41.0	38.6	9.5	32.7	-	56.3	73.9	17.6	Floor noise
Vert.	2483.500	AV	32.2	27.7	5.4	31.8	1.1	34.5	53.9	19.4	*1)
Vert.	4960.000	AV	29.9	31.6	7.5	31.2	-	37.9	53.9	16.1	Floor noise
Vert.	9920.000	AV	31.1	38.6	9.5	32.7	-	46.5	53.9	7.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

***Above results have sufficient margin without taking account Duty cycle correction factor.**

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	7440.000	AV	35.5	36.7	8.7	32.5	-24.6	23.8	53.9	30.1	*
Vert.	7440.000	AV	37.0	36.7	8.7	32.5	-24.6	25.3	53.9	28.6	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	13665469H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	February 7, 2021 (Day)
Temperature / Humidity	20 deg. C / 34 % RH
Engineer	Tomohisa Nakagawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz

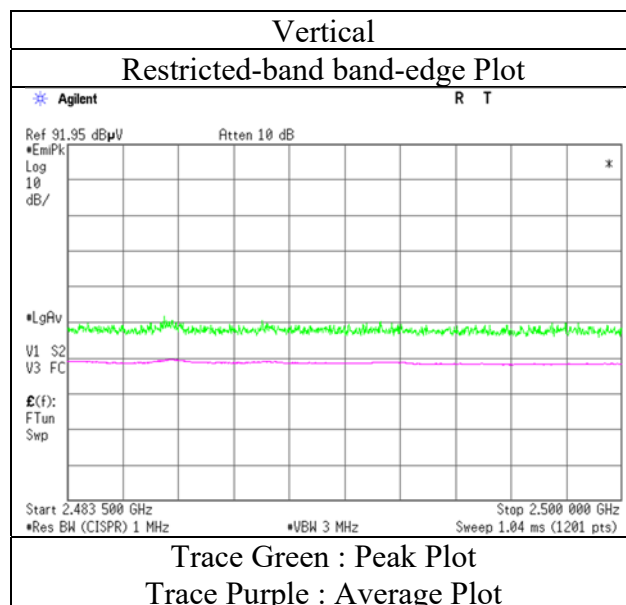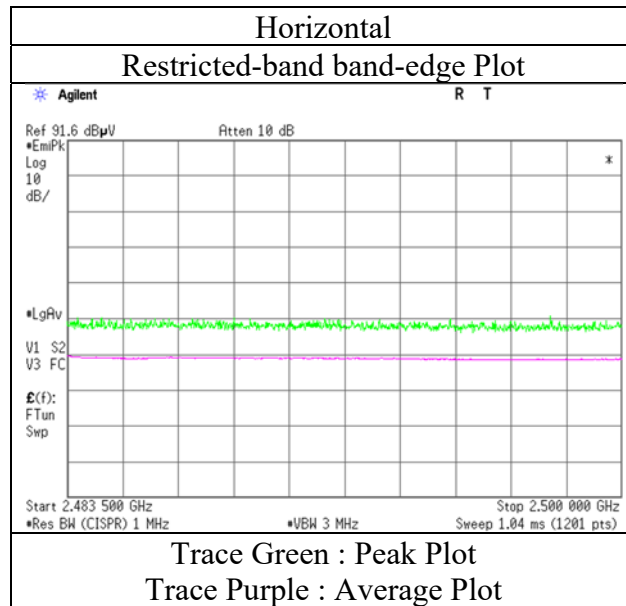

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date February 7, 2021 (Day) February 7, 2021 (Night)
Temperature / Humidity 20 deg. C / 34 % RH 22 deg. C / 28 % RH
Engineer Tomohisa Nakagawa (1 GHz -10 GHz) Yuichiro Yamazaki (Above 10 GHz)
Mode Tx, Hopping Off, 3DH5 2402 MHz (Below 1 GHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	156.002	QP	40.9	15.2	8.5	32.0	-	32.6	43.5	10.9	
Hori.	188.003	QP	41.5	16.2	8.7	31.9	-	34.5	43.5	9.0	
Hori.	577.998	QP	35.4	18.6	11.1	32.1	-	33.0	46.0	13.0	
Hori.	650.248	QP	34.7	19.2	11.4	32.1	-	33.2	46.0	12.8	
Hori.	791.349	QP	32.0	20.6	11.9	31.7	-	32.9	46.0	13.2	
Hori.	873.616	QP	30.6	21.8	12.3	31.3	-	33.4	46.0	12.6	
Hori.	2390.000	PK	42.8	27.8	5.3	31.8	-	44.1	73.9	29.8	
Hori.	4804.000	PK	40.8	31.6	7.5	31.2	-	48.7	73.9	25.2	Floor noise
Hori.	7206.000	PK	47.5	36.5	8.7	32.4	-	60.3	73.9	13.6	
Hori.	9608.000	PK	41.9	38.0	9.4	32.6	-	56.8	73.9	17.2	Floor noise
Hori.	2390.000	AV	31.3	27.8	5.3	31.8	1.1	33.7	53.9	20.3	*1)
Hori.	4804.000	AV	30.2	31.6	7.5	31.2	-	38.1	53.9	15.9	Floor noise
Hori.	9608.000	AV	31.2	38.0	9.4	32.6	-	46.0	53.9	7.9	Floor noise
Vert.	156.002	QP	44.0	15.2	8.5	32.0	-	35.7	43.5	7.8	
Vert.	171.996	QP	33.4	15.7	8.6	31.9	-	25.8	43.5	17.7	
Vert.	577.998	QP	36.8	18.6	11.1	32.1	-	34.4	46.0	11.6	
Vert.	650.248	QP	36.5	19.2	11.4	32.1	-	35.0	46.0	11.0	
Vert.	722.498	QP	36.2	20.0	11.7	32.1	-	35.9	46.0	10.1	
Vert.	873.616	QP	31.7	21.8	12.3	31.3	-	34.5	46.0	11.5	
Vert.	2390.000	PK	46.3	27.8	5.3	31.8	-	47.5	73.9	26.4	
Vert.	4804.000	PK	40.4	31.6	7.5	31.2	-	48.2	73.9	25.7	Floor noise
Vert.	7206.000	PK	47.4	36.5	8.7	32.4	-	60.2	73.9	13.8	
Vert.	9608.000	PK	41.6	38.0	9.4	32.6	-	56.4	73.9	17.5	Floor noise
Vert.	2390.000	AV	43.7	27.8	5.3	31.8	1.1	46.0	53.9	7.9	*1)
Vert.	4804.000	AV	30.0	31.6	7.5	31.2	-	37.8	53.9	16.1	Floor noise
Vert.	9608.000	AV	31.7	38.0	9.4	32.6	-	46.5	53.9	7.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

***Above results have sufficient margin without taking account Duty cycle correction factor.**

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402	PK	87.4	27.83	5.29	31.84	88.7	-	-	Carrier
Hori.	2400	PK	36.8	27.83	5.29	31.84	38.1	68.7	30.6	
Vert.	2402	PK	84.8	27.83	5.29	31.84	86.1	-	-	Carrier
Vert.	2400	PK	35.2	27.83	5.29	31.84	36.5	66.1	29.6	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	7206.000	AV	37.9	36.5	8.7	32.4	-24.6	26.1	53.9	27.8	*
Vert.	7206.000	AV	38.1	36.5	8.7	32.4	-24.6	26.3	53.9	27.6	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	13665469H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	February 7, 2021 (Day)
Temperature / Humidity	20 deg. C / 34 % RH
Engineer	Tomohisa Nakagawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

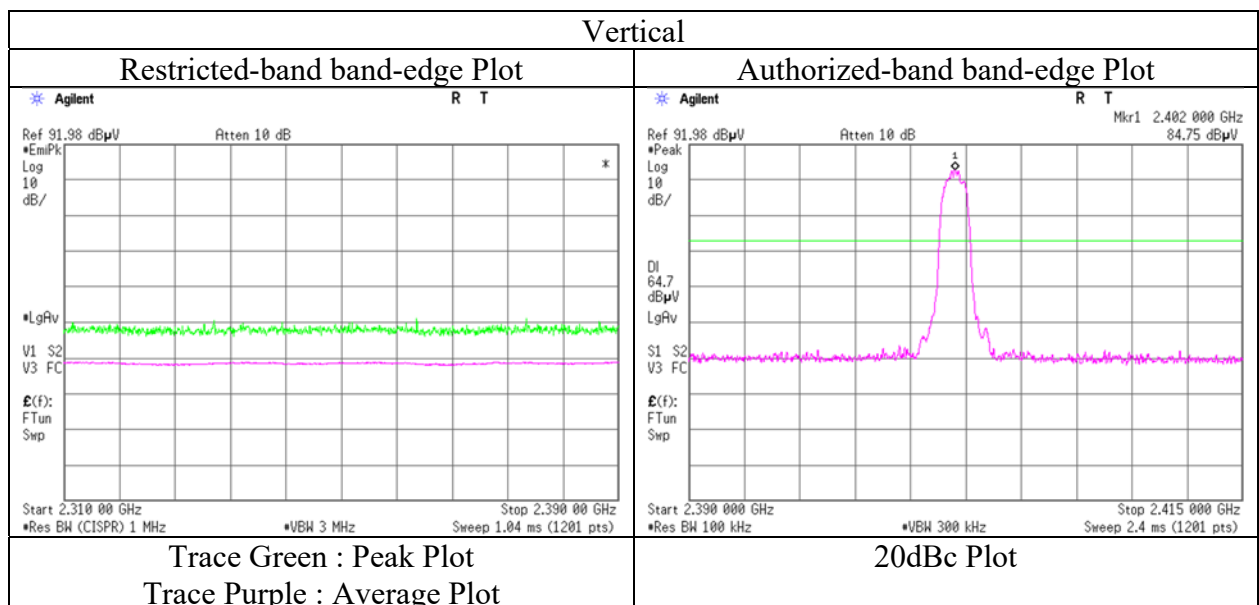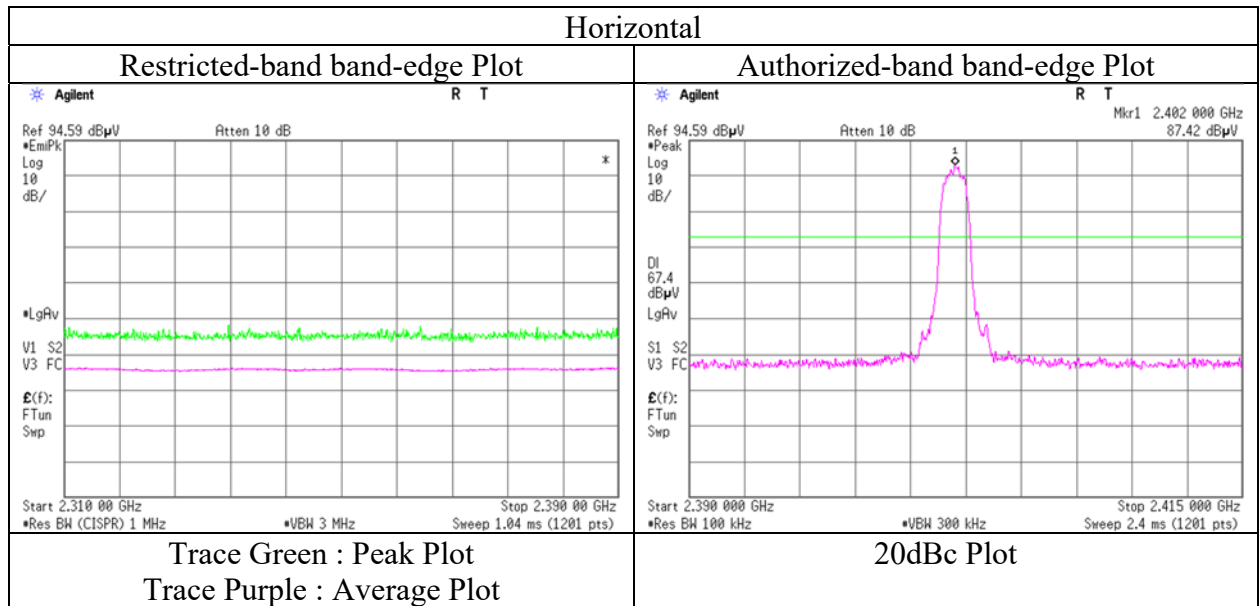

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date February 7, 2021 (Day) February 7, 2021 (Night)
Temperature / Humidity 20 deg. C / 34 % RH 22 deg. C / 28 % RH
Engineer Tomohisa Nakagawa (1 GHz -10 GHz) Yuichiro Yamazaki (Above 10 GHz)
Mode Tx, Hopping Off, 3DH5 2441 MHz (Below 1 GHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	156.002	QP	41.1	15.2	8.5	32.0	-	32.8	43.5	10.7	
Hori.	188.003	QP	41.6	16.2	8.7	31.9	-	34.6	43.5	8.9	
Hori.	577.998	QP	35.4	18.6	11.1	32.1	-	33.0	46.0	13.0	
Hori.	650.248	QP	34.8	19.2	11.4	32.1	-	33.3	46.0	12.7	
Hori.	791.349	QP	32.2	20.6	11.9	31.7	-	33.1	46.0	13.0	
Hori.	873.616	QP	30.9	21.8	12.3	31.3	-	33.7	46.0	12.3	
Hori.	4882.000	PK	40.4	31.6	7.5	31.2	-	48.2	73.9	25.7	Floor noise
Hori.	7323.000	PK	45.5	36.6	8.7	32.4	-	58.4	73.9	15.5	
Hori.	9764.000	PK	41.0	38.4	9.4	32.7	-	56.2	73.9	17.7	Floor noise
Hori.	4882.000	AV	32.4	31.6	7.5	31.2	-	40.3	53.9	13.6	Floor noise
Hori.	9764.000	AV	32.9	38.4	9.4	32.7	-	48.1	53.9	5.8	Floor noise
Vert.	156.002	QP	44.0	15.2	8.5	32.0	-	35.7	43.5	7.8	
Vert.	171.996	QP	33.3	15.7	8.6	31.9	-	25.7	43.5	17.8	
Vert.	577.998	QP	36.8	18.6	11.1	32.1	-	34.4	46.0	11.6	
Vert.	650.248	QP	36.5	19.2	11.4	32.1	-	35.0	46.0	11.0	
Vert.	722.498	QP	36.3	20.0	11.7	32.1	-	36.0	46.0	10.0	
Vert.	873.616	QP	31.0	21.8	12.3	31.3	-	33.8	46.0	12.2	
Vert.	4882.000	PK	40.5	31.6	7.5	31.2	-	48.4	73.9	25.5	Floor noise
Vert.	7323.000	PK	45.8	36.6	8.7	32.4	-	58.7	73.9	15.2	
Vert.	9764.000	PK	40.5	38.4	9.4	32.7	-	55.7	73.9	18.2	Floor noise
Vert.	4882.000	AV	32.0	31.6	7.5	31.2	-	39.8	53.9	14.1	Floor noise
Vert.	9764.000	AV	33.1	38.4	9.4	32.7	-	48.3	53.9	5.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

***Above results have sufficient margin without taking account Duty cycle correction factor.**

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	7323.000	AV	38.8	36.6	8.7	32.4	-24.6	27.1	53.9	26.8	*
Vert.	7323.000	AV	38.6	36.6	8.7	32.4	-24.6	26.9	53.9	27.0	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date February 7, 2021 (Day) February 7, 2021 (Night)
Temperature / Humidity 20 deg. C / 34 % RH 22 deg. C / 28 % RH
Engineer Tomohisa Nakagawa Yuichiro Yamazaki
(1 GHz -10 GHz) (Above 10 GHz)
(Below 1 GHz)
Mode Tx, Hopping Off, 3DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	156.002	QP	40.3	15.2	8.5	32.0	-	32.0	43.5	11.5	
Hori.	188.003	QP	41.3	16.2	8.7	31.9	-	34.3	43.5	9.2	
Hori.	577.998	QP	35.5	18.6	11.1	32.1	-	33.1	46.0	12.9	
Hori.	650.248	QP	34.2	19.2	11.4	32.1	-	32.7	46.0	13.3	
Hori.	791.349	QP	32.5	20.6	11.9	31.7	-	33.4	46.0	12.7	
Hori.	873.616	QP	30.5	21.8	12.3	31.3	-	33.3	46.0	12.7	
Hori.	2483.500	PK	44.6	27.7	5.4	31.8	-	45.8	73.9	28.1	
Hori.	4960.000	PK	40.1	31.6	7.5	31.2	-	48.0	73.9	25.9	Floor noise
Hori.	7440.000	PK	44.7	36.7	8.7	32.5	-	57.6	73.9	16.3	
Hori.	9920.000	PK	40.9	38.6	9.5	32.7	-	56.3	73.9	17.7	Floor noise
Hori.	2483.500	AV	31.9	27.7	5.4	31.8	1.1	34.1	53.9	19.8	*1)
Hori.	4960.000	AV	29.8	31.6	7.5	31.2	-	37.7	53.9	16.2	Floor noise
Hori.	9920.000	AV	30.9	38.6	9.5	32.7	-	46.2	53.9	7.7	Floor noise
Vert.	156.002	QP	43.4	15.2	8.5	32.0	-	35.1	43.5	8.4	
Vert.	171.996	QP	33.2	15.7	8.6	31.9	-	25.6	43.5	17.9	
Vert.	577.998	QP	36.9	18.6	11.1	32.1	-	34.5	46.0	11.5	
Vert.	650.248	QP	36.5	19.2	11.4	32.1	-	35.0	46.0	11.0	
Vert.	722.498	QP	36.1	20.0	11.7	32.1	-	35.8	46.0	10.2	
Vert.	873.616	QP	31.8	21.8	12.3	31.3	-	34.6	46.0	11.4	
Vert.	2483.500	PK	43.9	27.7	5.4	31.8	-	45.1	73.9	28.8	
Vert.	4960.000	PK	40.2	31.6	7.5	31.2	-	48.1	73.9	25.8	Floor noise
Vert.	7440.000	PK	45.4	36.7	8.7	32.5	-	58.4	73.9	15.6	
Vert.	9920.000	PK	41.5	38.6	9.5	32.7	-	56.9	73.9	17.1	Floor noise
Vert.	2483.500	AV	34.7	27.7	5.4	31.8	1.1	36.9	53.9	17.0	*1)
Vert.	4960.000	AV	30.3	31.6	7.5	31.2	-	38.2	53.9	15.7	Floor noise
Vert.	9920.000	AV	31.2	38.6	9.5	32.7	-	46.5	53.9	7.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	7440.000	AV	34.6	36.7	8.7	32.5	-24.6	22.9	53.9	31.0	*
Vert.	7440.000	AV	36.5	36.7	8.7	32.5	-24.6	24.8	53.9	29.1	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))



- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	13665469H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	February 7, 2021 (Day)
Temperature / Humidity	20 deg. C / 34 % RH
Engineer	Tomohisa Nakagawa (1 GHz - 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

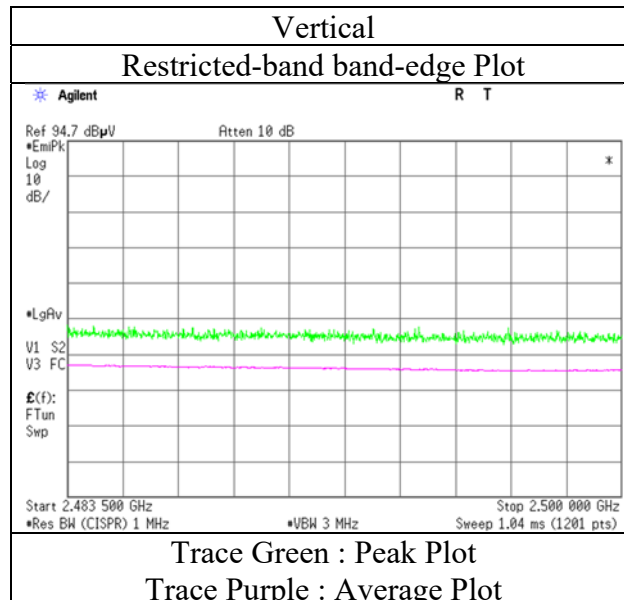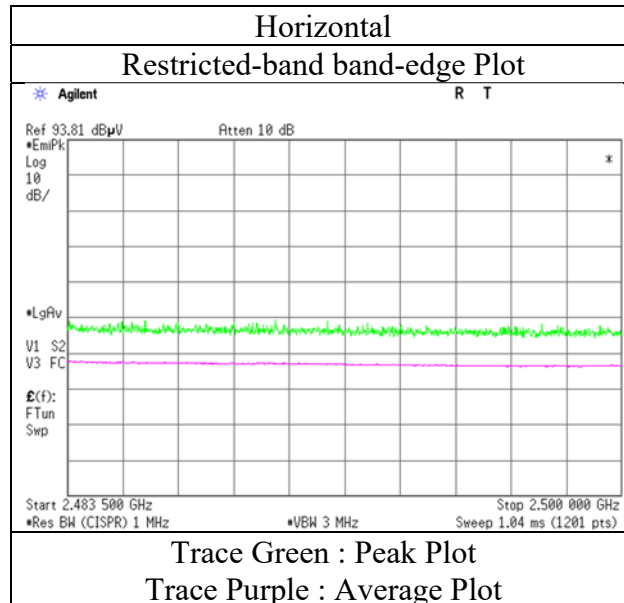

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Plot data, Worst case)

Report No.	13665469H	
Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.4	No.4
Date	February 7, 2021 (Day)	February 7, 2021 (Night)
Temperature / Humidity	20 deg. C / 34 % RH	22 deg. C / 28 % RH
Engineer	Tomohisa Nakagawa (1 GHz -10 GHz)	Yuichiro Yamazaki (Above 10 GHz) (Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz	

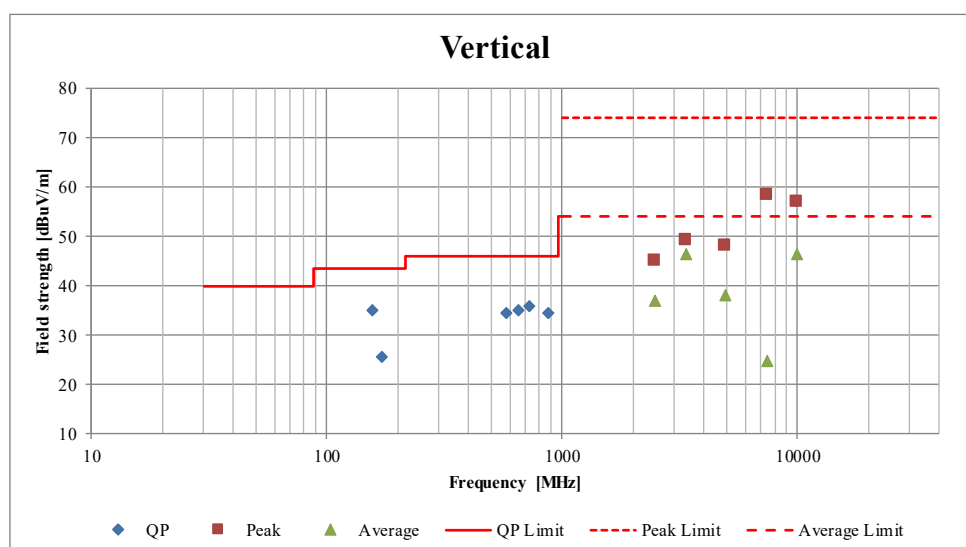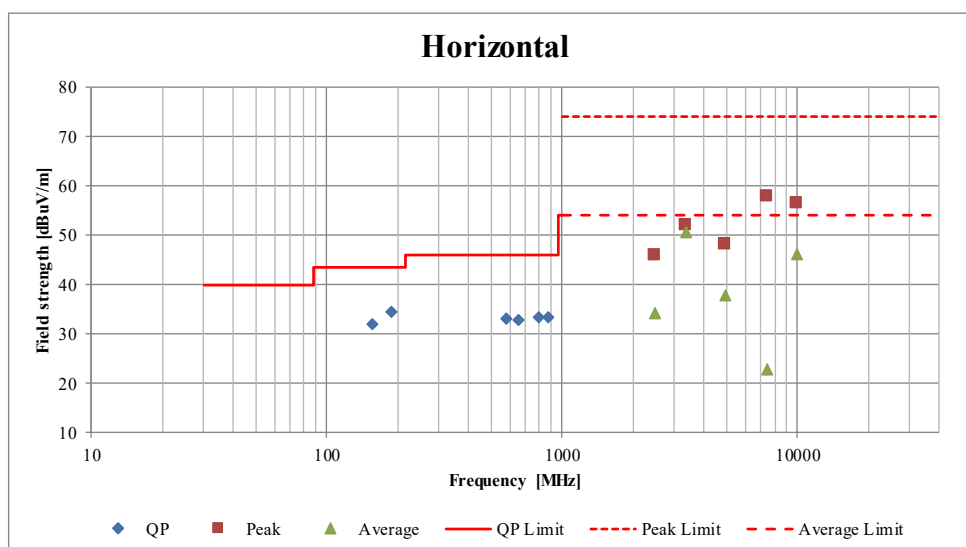

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	13665469H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	January 18, 2021
Temperature / Humidity	23 deg. C / 32 % RH
Engineer	Tomohisa Nakagawa
Mode	Tx, Hopping Off, DH5

2402 MHz

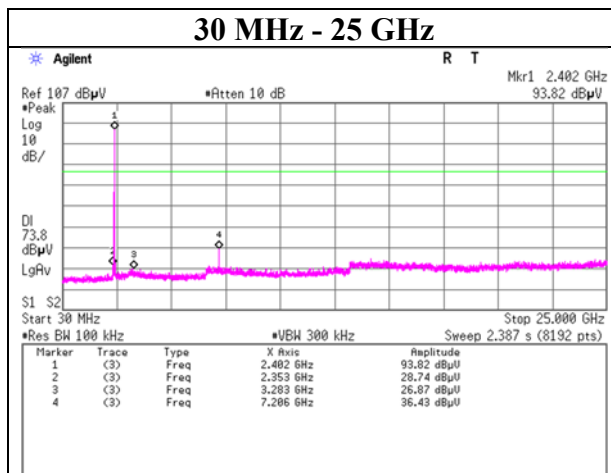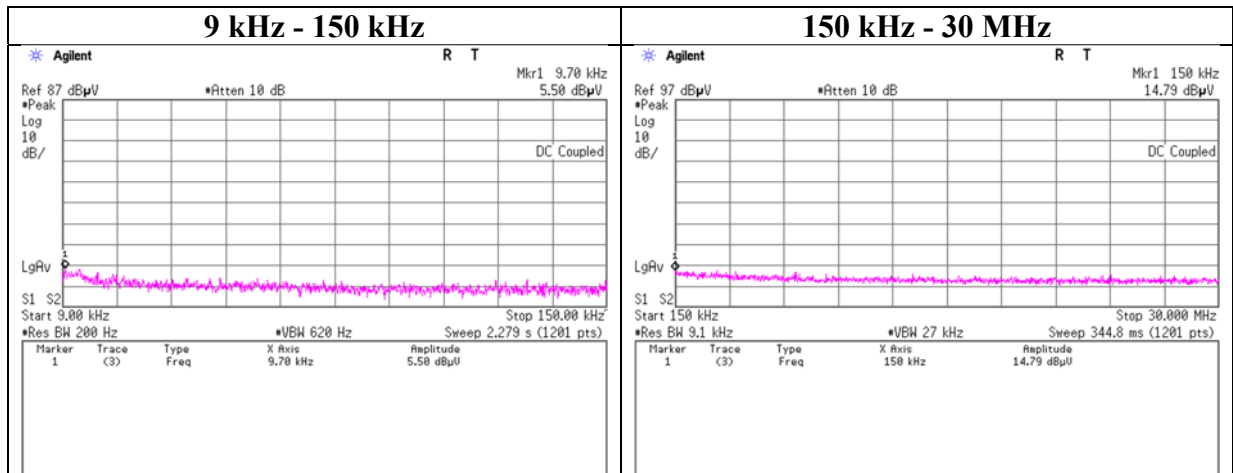

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	13665469H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	January 18, 2021
Temperature / Humidity	23 deg. C / 32 % RH
Engineer	Tomohisa Nakagawa
Mode	Tx, Hopping Off, DH5

2441 MHz

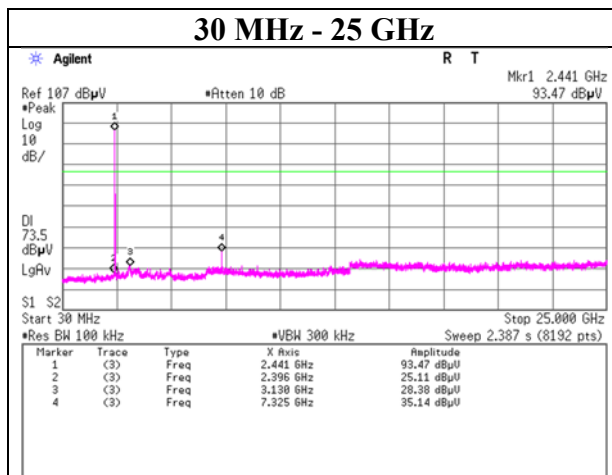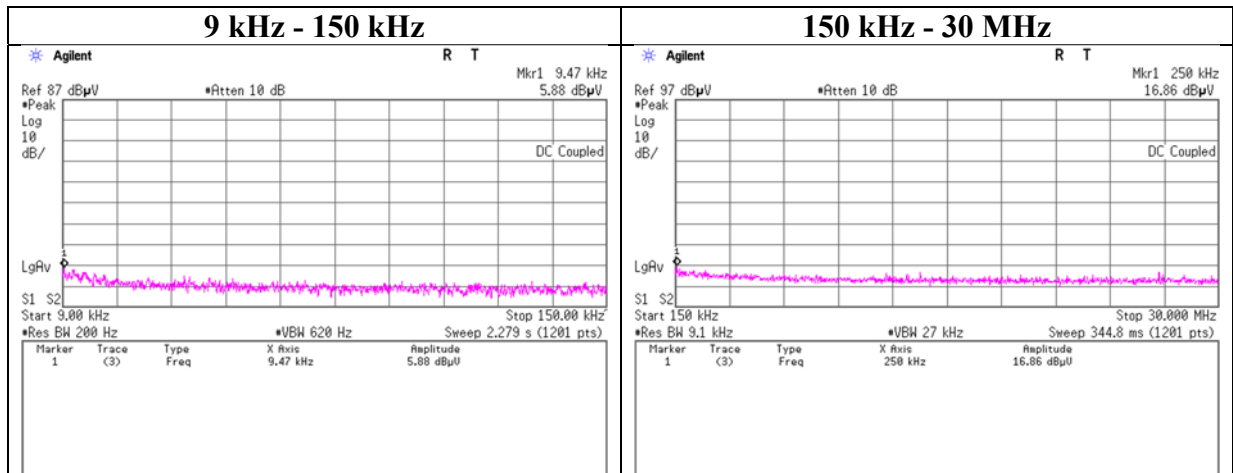

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 18, 2021
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx, Hopping Off, DH5



2480 MHz

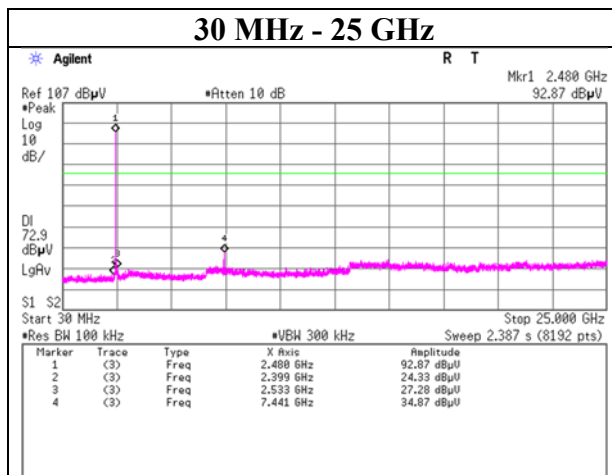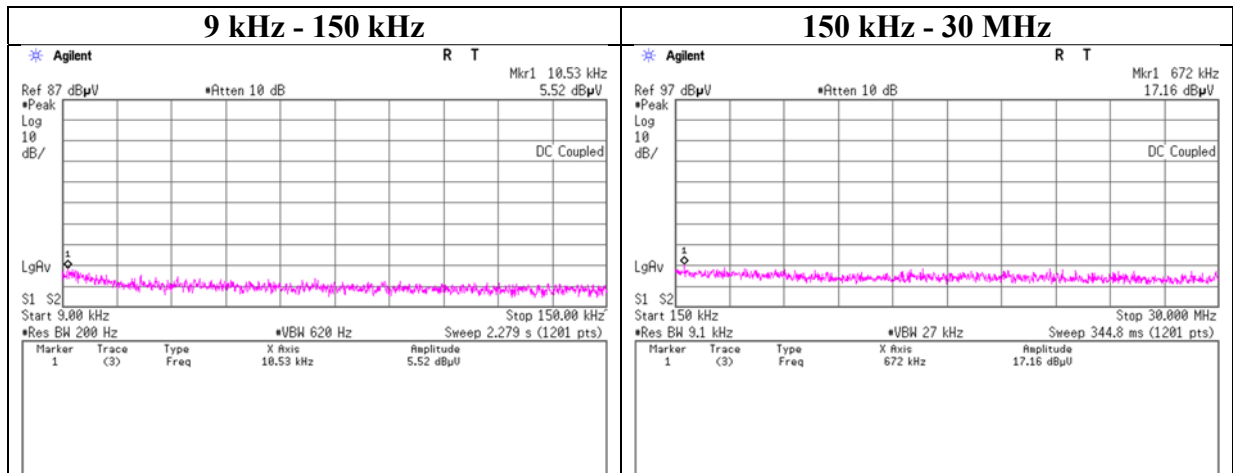

Conducted Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 18, 2021
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx, Hopping Off, 3DH5



2402 MHz

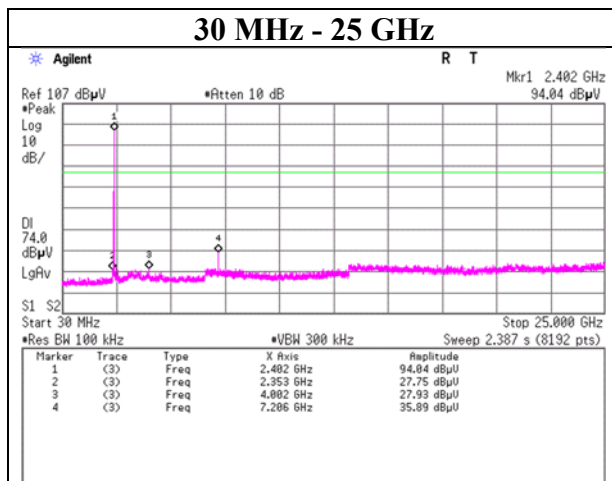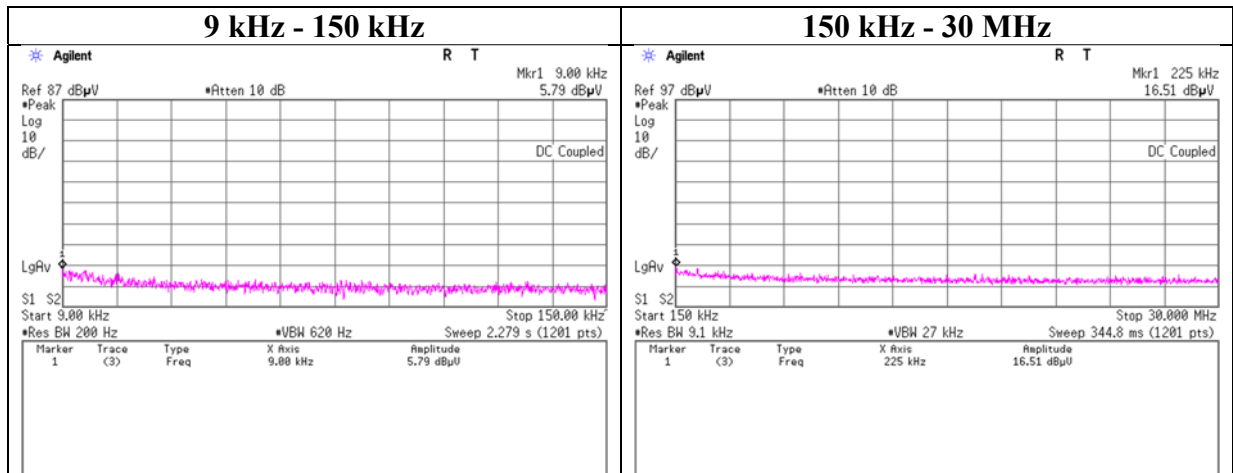

Conducted Spurious Emission

Report No. 13665469H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 18, 2021
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx, Hopping Off, 3DH5



2441 MHz

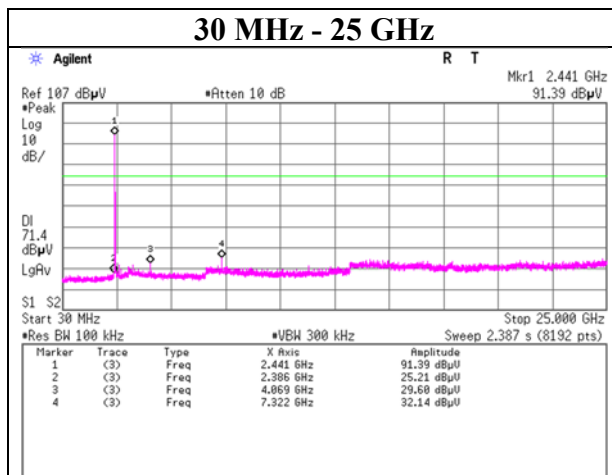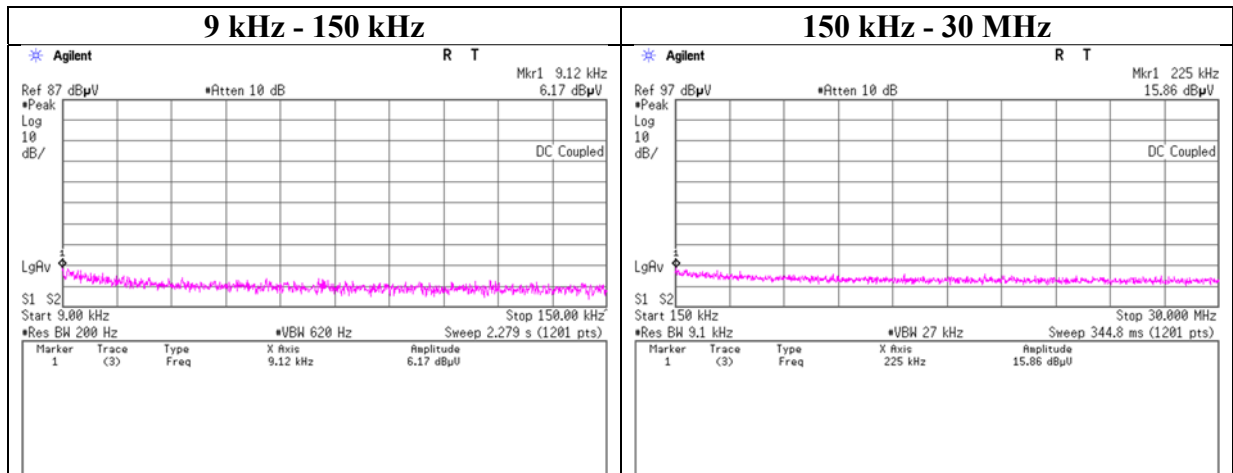

Conducted Spurious Emission

Report No.	13665469H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	January 18, 2021
Temperature / Humidity	23 deg. C / 32 % RH
Engineer	Tomohisa Nakagawa
Mode	Tx, Hopping Off, 3DH5

2480 MHz

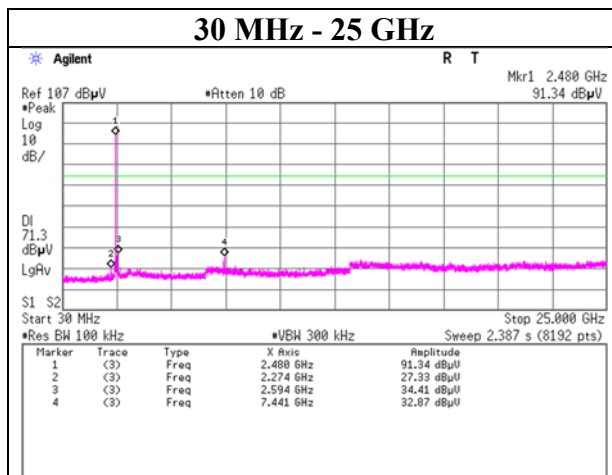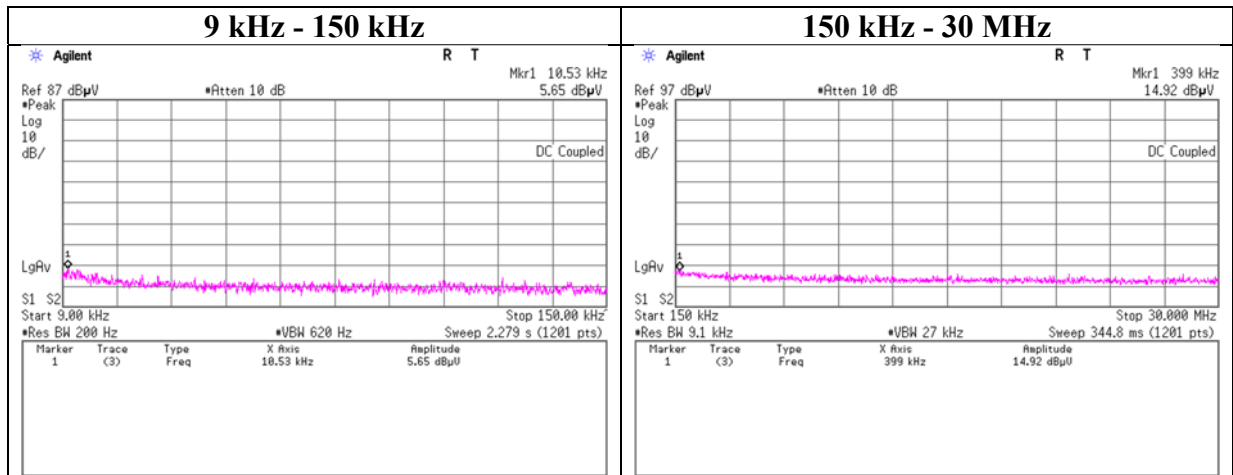

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Conducted Emission Band Edge compliance

Report No. 13665469H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 18, 2021
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx, Hopping Off, DH5 Tx, Hopping On, DH5

Hopping On

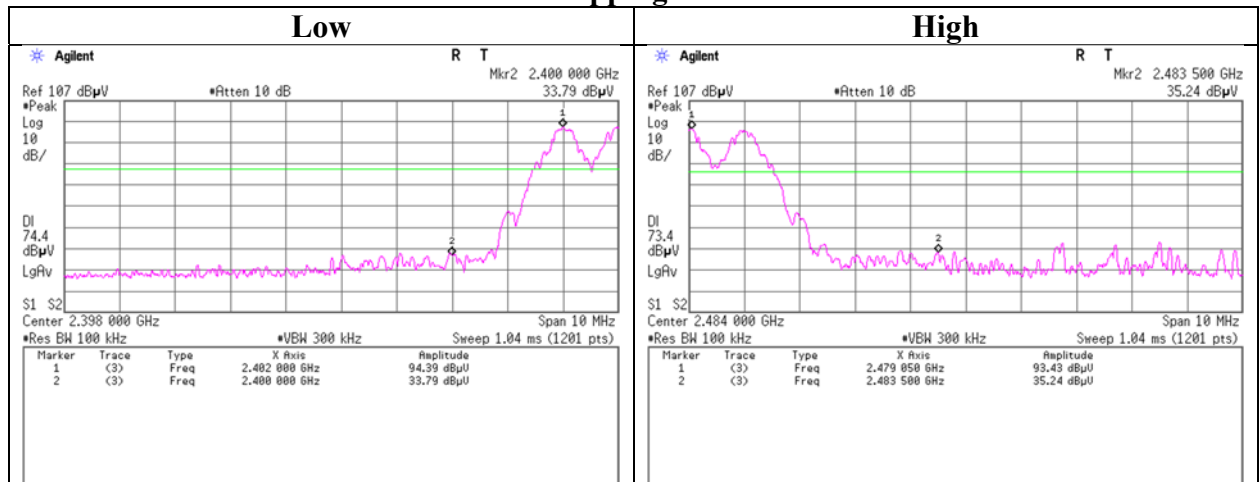

Hopping Off

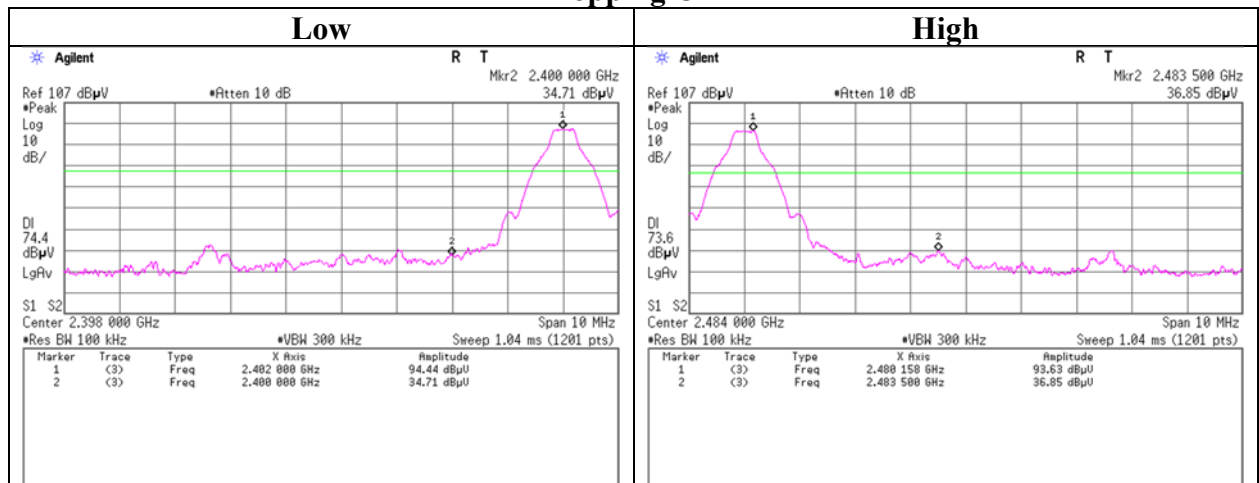

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Conducted Emission Band Edge compliance

Report No. 13665469H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 18, 2021
Temperature / Humidity 23 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx, Hopping Off, 3DH5 Tx, Hopping On, 3DH5

Hopping On

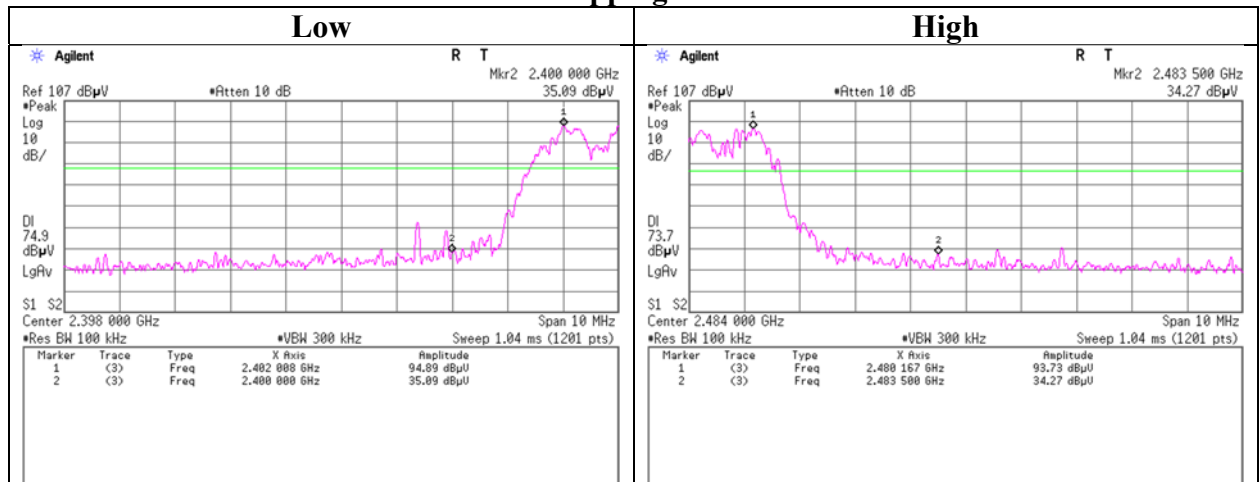

Hopping Off

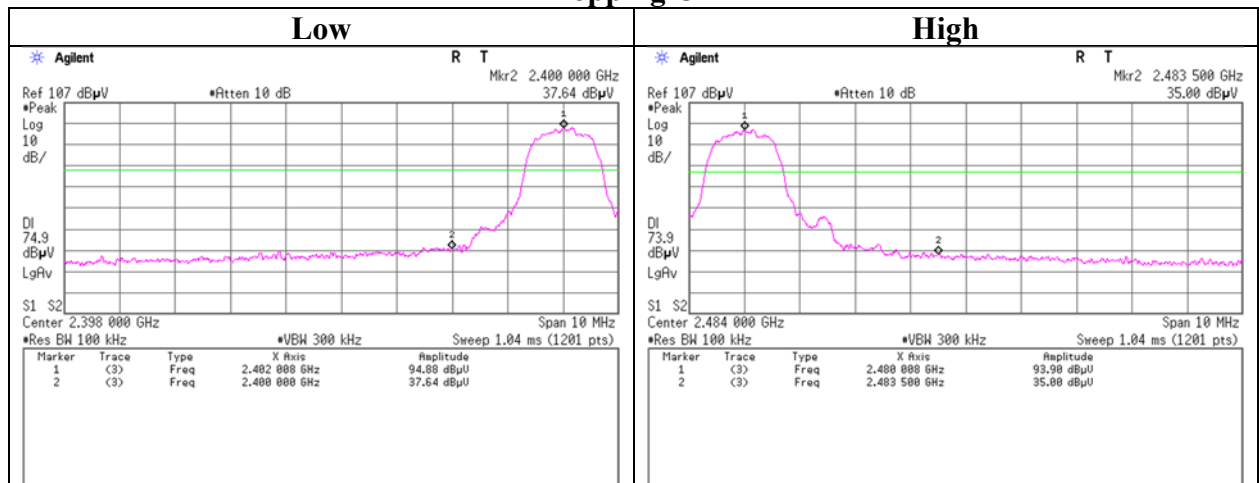

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MOS-14	141561	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1401	01/15/2021	12
AT	MMM-12	141547	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	60500120	02/03/2020	12
AT	MJM-24	142225	Measure	ASKUL	-	-	-	-
AT	MCC-64	141327	Coaxial Cable	UL Japan	-	-	02/03/2021	12
AT	MAT-10	141156	Attenuator(10dB)	Weinschel Corp	2	BL1173	11/13/2020	12
AT	MSA-14	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	12/18/2020	12
AT	MPM-12	141809	Power Meter	ANRITSU	ML2495A	825002	05/07/2020	12
AT	MPSE-17	141830	Power sensor	ANRITSU	MA2411B	738285	05/07/2020	12
AT	MCC-245	197220	Microwave cable	Huber+Suhner	SF126E/11PC35/11PC35/2000MM	537003/126E	03/23/2020	12
AT	MAT-23	141361	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	04/21/2020	12
RE	MAEC-04	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/25/2020	24
RE	MOS-15	141562	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0010	01/15/2021	12
RE	MMM-10	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	01/07/2021	12
RE	MJM-29	142230	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-ME MI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-04-SVSWR	142017	AC4_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/04/2019	24
RE	MHA-21	141508	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	557	05/22/2020	12
RE	MPA-12	141581	MicroWave System Amplifier	Keysight Technologies Inc	83017A	00650	10/19/2020	12
RE	MCC-141	141412	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	-	-
RE	MHF-26	141296	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	09/23/2020	12
RE	MHA-17	141506	Horn Antenna 15-40GHz	Schwarzbeck Mess - Elektronik	BBHA9170	BBHA9170307	07/16/2020	12
RE	MCC-246	199563	Microwave Cable	Huber+Suhner	SF126E/11PC35/11PC35/1000M, 5000M	537061/126E / 537072/126E	06/11/2020	12
RE	MSA-03	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	03/04/2020	12
RE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	06/03/2020	12
RE	MAT-34	141331	Attenuator(6dB)	TME	UFA-01	-	02/02/2021	12
RE	MBA-05	141425	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	VHA 91031302	08/31/2020	12
RE	MCC-50	141397	Coaxial Cable	UL Japan	-	-	11/06/2020	12
RE	MLA-23	141267	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-192	09/02/2020	12
RE	MPA-14	141583	Pre Amplifier	SONOMA INSTRUMENT	310	260833	02/03/2021	12

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission test

AT: Antenna Terminal Conducted test