




SAR TEST REPORT


Test Report No. : 12475916H-E-R1

Applicant : RICOH COMPANY, LTD.
Type of Equipment : Digital Camera
Model No. : R02070
FCC ID : BBP-R02070
Test regulation : FCC47CFR 2.1093
Test Result : Complied (Refer to SECTION 4)
Reported SAR(1g) Value : **The highest reported SAR(1g)**
Body : 0.85 W/kg

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report covers SAR technical requirements. It does not cover administrative issues such as Manual or non-SAR test related Requirements. (if applicable)
6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
8. The information provided from the customer for this report is identified in SECTION 1.
9. This report is a revised version of 12475916H-E. 12475916H-E is replaced with this report.

Date of test: April 2 to 3, June 16 2019
Representative test engineer: 
Hisayoshi Sato
Engineer
Consumer Technology Division

Approved by : 
Satofumi Matsuyama
Engineer
Consumer Technology Division

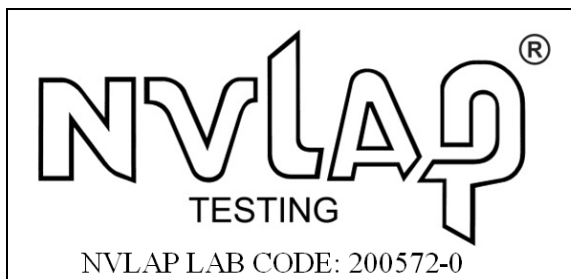

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, http://japan.ul.com/resources/emc_accredited/

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

REVISION HISTORY

Original Test Report No.: 12475916H-E

[illegible]

CONTENTS	PAGE
SECTION1: Customer information.....	4
SECTION2: Equipment under test (E.U.T.).....	4
2.1 Identification of E.U.T.....	4
2.2 Product description	4
SECTION3: Test standard information.....	6
3.1 Test Specification	6
3.2 Procedure	6
3.3 Additions or deviations to standard	6
3.4 Exposure limit.....	7
3.5 SAR	7
3.6 Test Location	7
SECTION4: Test result.....	8
4.1 Result.....	8
4.2 Stand-alone SAR result.....	8
4.3 Simultaneous transmission SAR result.....	8
SECTION5: Tune-up tolerance information and software information.....	9
SECTION6: RF Exposure Conditions (Test Configurations).....	11
6.1 Summary of the distance between antenna and surface of EUT	11
6.2 SAR test exclusion considerations according to KDB447498 D01	11
6.3 SAR test exclusion considerations according to KDB UMPC	15
SECTION7: Description of the Body setup	16
7.1 Procedure for SAR test position determination	16
7.2 Test position for Body setup.....	16
SECTION8: Description of the operating mode.....	17
8.1 Output Power and SAR test required.....	17
SECTION9: Test surrounding	19
9.1 Measurement uncertainty.....	19
SECTION10: Parameter Check.....	20
10.1 For SAR system check.....	21
10.2 For SAR measurement.....	23
SECTION11: System Check confirmation.....	24
SECTION12: Measured and Reported (Scaled) SAR Results	25
12.1 WLAN 2.4GHz Band	27
12.2 WLAN 5.2GHz Band	28
12.3 Repeated measurement	28
SECTION13: Test instruments	29
APPENDIX 1 : System Check.....	30
APPENDIX 2 : SAR Measurement data.....	38
APPENDIX 3 : System specifications.....	55
APPENDIX 4 : Photographs of test setup.....	126

SECTION1: Customer information

Company Name	:	RICOH COMPANY, LTD.
Address	:	1-3-6, Nakamagome, Ohta-ku, Tokyo, 143-8555, Japan
Telephone Number	:	+81-50-3814-2095
Facsimile Number	:	+81-3-3775-8531
Contact Person	:	Kiyoshi Yamamoto

The information provided from the customer is as follows;

- Applicant, Type of Equipment, Model No. on the cover and other relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (E.U.T.)

* The laboratory is exempted from liability of any test results affected from the information in SECTION 2.

SECTION2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

<Information of the EUT>

Type of Equipment	:	Digital Camera
Model No.	:	R02070
Serial No.	:	1007
Rating	:	Li-ion battery M/N: DB-110 DC 3.6 V 4.9 Wh/1350 mAh
Receipt Date of Sample (Information from test lab.)	:	October 2, 2018
Country of Mass-production	:	Indonesia
Condition of EUT	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product description

Model: R02070 (referred to as the EUT in this report) is a Digital Camera.

Operating Temperature: -10 deg. C to +40 deg. C

Radio Specification

WLAN (2.4 GHz band)

Type of radio	IEEE802.11b	IEEE802.11g	IEEE802.11n (20 M band)	IEEE802.11n (40 M band)
Radio type	Transceiver			
Frequency of operation	2412 MHz - 2462 MHz			2422 MHz - 2452 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK)	
Channel spacing	5 MHz			
Antenna type	Chip Antenna			
Antenna Gain	+0.6 dBi			

WLAN (5 GHz band)

Type of radio	IEEE802.11a	IEEE802.11n (20 M band)	IEEE802.11ac (20 M band)	IEEE802.11n (40 M band)	IEEE802.11ac (40 M band)	IEEE802.11ac (80 M band)
Radio type	Transceiver					
Frequency of operation	5180 MHz - 5240 MHz			5190 MHz - 5230 MHz		5210 MHz
Type of modulation	OFDM (64QAM, 16QAM, QPSK)		OFDM (256QAM, 64QAM, 16QAM, QPSK)	OFDM (64QAM, 16QAM, QPSK)	OFDM (256QAM, 64QAM, 16QAM, QPSK)	
Channel spacing	20 MHz			40 MHz		80 MHz
Antenna type	Chip Antenna					
Antenna Gain	+1.8 dBi					

Bluetooth

Type of radio	Bluetooth Ver.4.2
Radio type	Transceiver
Frequency of operation	2402 MHz - 2480 MHz
Type of modulation	FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK): BDR/EDR GFSK: BLE
Channel spacing	1 MHz: BDR/EDR 2 MHz: BLE
Antenna type	Chip Antenna
Antenna Gain	+0.6 dBi

NFC

Type of radio	NFC
Radio type	Transceiver
Frequency of operation	13.56 MHz
Type of modulation	ASK
Channel spacing	-
Antenna type	Pattern Antenna
Antenna Gain	-

- * The EUT do not use the special transmitting technique such as “beam-forming” and “time-space code diversity.”
 * Wi-Fi and Bluetooth do not transmit simultaneously. Wi-Fi(2.4GHz) and Wi-Fi(5GHz) do not transmit simultaneously.

SECTION3: Test standard information

3.1 Test Specification

Title : **FCC47CFR 2.1093**

Radiofrequency radiation exposure evaluation: portable devices.

: **IEEE Std 1528-2013:**

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

: **Published RF exposure KDB procedures**

- ☒ **KDB447498D01(v06)** RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
- ☐ **KDB447498D02(v02r01)** SAR Measurement Procedures for USB Dongle Transmitters
- ☐ **KDB648474D04(v01r03)** SAR Evaluation Considerations for Wireless Handsets
- ☐ **KDB941225D01(v03r01)** 3G SAR Measurement Procedures
- ☐ **KDB941225D05(v02r05)** SAR Evaluation Considerations for LTE Devices
- ☐ **KDB941225D06(v02r01)** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities (Hot Spot SAR)
- ☒ **KDB941225D07(v01r02)** SAR Evaluation Procedures for UMPC Mini-Tablet Devices
- ☐ **KDB616217D04(v01r02)** SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
- ☒ **KDB865664D01(v01r04)** SAR Measurement Requirements for 100MHz to 6 GHz
- ☒ **KDB248227D01(v02r02)** SAR Guidance for 802.11(Wi-Fi) Transmitters

Reference

[1]SPEAG uncertainty document (AN 15-7/AN19-17) for DASY 5 System from SPEAG (Schmid & Partner Engineering AG).

3.2 Procedure

Transmitter	WLAN and Bluetooth
Test Procedure	Published RF exposure KDB procedures
Category	FCC47CFR 2.1093
Note: UL Japan, Inc. 's SAR Work Procedures 13-EM-W0429 and 13-EM-W0430	

3.3 Additions or deviations to standard

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg
--

3.5 SAR

Specific Absorption Rate (SAR): The time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ), as shown in the following equation:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg) or equivalently milliwatts per gram (mW/g).

SAR is related to the E-field at a point by the following equation:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms E-field strength (V/m)

3.6 Test Location

UL Japan, Inc. Ise EMC Lab.

Shielded room for SAR testings

NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967 / ISED SAR Lab Company Number: 2973C

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

SECTION4: Test result

4.1 Result

Complied

Highest values at each band are listed next section.

4.2 Stand-alone SAR result

Reported SAR

Measured SAR is scaled to the maximum tune-up tolerance limit and the maximum duty by the following formulas.

Reported SAR= Measured SAR [W/kg] * Power Scaled factor * Duty Scaled factor

Maximum tune-up tolerance limit is by the specification from a customer.

* Power Scaled factor = Maximum tune-up tolerance limit [mW] / Measured power [mW]

* Duty Scaled factor = 100 / Duty(%)

Body SAR

Mode	Freq. (MHz)	Power (dBm)		Power Scaled factor	Duty(%)	Duty Scaled factor	1-g SAR (W/kg)	
		Tune-up upper Power	Measured average (Burst Power)				Meas.	Reported
WLAN11n40	5190	17.00	15.15	1.53	87.6	1.141	0.486	0.848

Note(s):

The sample used by the SAR test is not more than 2 dB lower than the maximum tune-up tolerance limit. That is measured power is included the tune-up tolerance range.

For WLAN Maximum tune-up tolerance limit is defined by a customer as duty100%.

*Details are shown at section 12.

4.3 Simultaneous transmission SAR result

WLAN and Bluetooth do not transmit simultaneously.

SECTION5: Tune-up tolerance information and software information

Maximum tune-up tolerance limit(Burst average)


Mode	Band	Maximum tune-up tolerance limit [dBm]	Maximum tune-up tolerance limit [mW]	Power setting
WLAN 11b	2.4GHz	17.00	50.12	60
WLAN 11g	2.4GHz	17.00	50.12	60
WLAN 11n20	2.4GHz	17.00	50.12	60
WLAN 11n40	2.4GHz	17.00	50.12	60
WLAN 11a	5.2GHz	17.00	50.12	60
WLAN 11n20	5.2GHz	17.00	50.12	60
WLAN 11n40	5.2GHz	17.00	50.12	60
WLAN 11ac20	5.2GHz	16.00	39.81	56
WLAN 11ac40	5.2GHz	15.00	31.62	52
WLAN 11ac80	5.2GHz	14.00	25.12	48
Bluetooth DH5 BDR	2.4GHz	8.00	6.31	-
Bluetooth 3DH5 EDR	2.4GHz	2.00	1.58	-
Bluetooth LE	2.4GHz	7.00	5.01	-

Maximum tune-up tolerance limit is defined by a customer as duty100%.


Software setting
*The power value of the EUT was set for testing as follows (setting value might be different from product specification value); WLAN Power settings: See above table. Software: Certification FW 001 Bluetooth Power settings: See above table. Software: Certification FW 001 *This setting of software is the worst case. The test was performed with condition that obtained the maximum average power (Burst) in pre-check. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.

Duty Confirmation

11b 1 Mbps

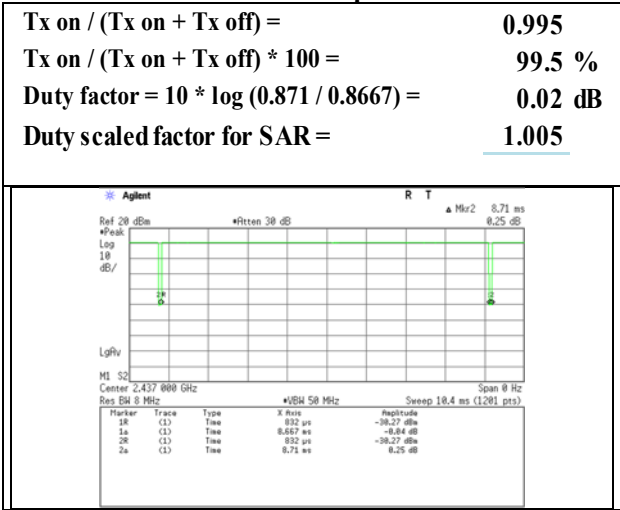

11n-40 MCS 0 (13.5 Mbps)

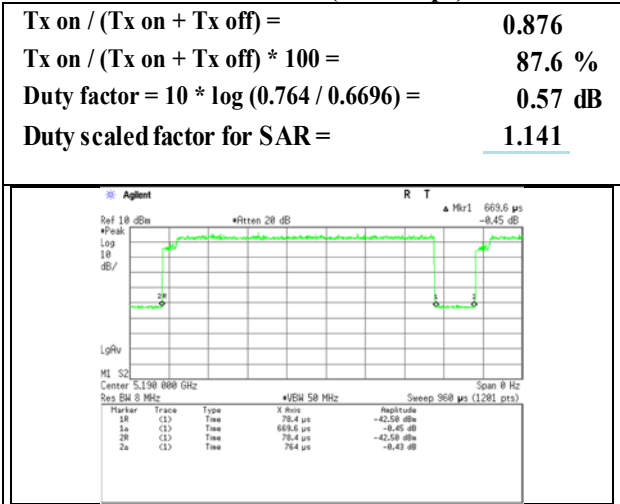

SECTION6: RF Exposure Conditions (Test Configurations)

6.1 Summary of the distance between antenna and surface of EUT

Test position	Distance
Front	2.79 mm
Front tilt	3.97 mm
Rear	25.47 mm
Left	10.86 mm
Left tilt	8.48 mm
Right	95.34 mm
Top	21.63 mm
Bottom	34.17 mm
Left tilt2	4.90 mm

*Details are shown in appendix 4

6.2 SAR test exclusion considerations according to KDB447498 D01

The following is based on KDB447498D01.

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0$$

for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

1. The upper frequency of the frequency band was used in order to calculate standalone SAR test exclusion considerations.
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison
4. The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. When the separation of antenna to EUT's surfaces and edges are ≤ 50 mm, the separation distance used for the SAR exclusion calculations is 5 mm.
5. "N/A" displayed on below exclusion calculation means not applicable this formula since distance between antenna and surface is > 50 mm.

When the calculated threshold value by a numerical formula above-mentioned in the following table is 3.0 or less, Body SAR test is excluded.

SAR exclusion calculations for antenna <50mm from the user

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
			dBm	mW	Front	Front tilt	Rear	Left	Left tilt	Front	Front tilt	Rear	Left	Left tilt
Main	11b	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	11g	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	11n20	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	11n40	2452	17.00	50	2.79	3.97	25.47	10.86	8.48	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	BDR	2480	8.00	6	2.79	3.97	25.47	10.86	8.48	1.9 -EXEMPT-	1.9 -EXEMPT-	1.9 -EXEMPT-	1.9 -EXEMPT-	1.9 -EXEMPT-
Main	EDR	2480	2.00	2	2.79	3.97	25.47	10.86	8.48	0.6 -EXEMPT-	0.6 -EXEMPT-	0.6 -EXEMPT-	0.6 -EXEMPT-	0.6 -EXEMPT-
Main	LE	2480	7.00	5	2.79	3.97	25.47	10.86	8.48	1.6 -EXEMPT-	1.6 -EXEMPT-	1.6 -EXEMPT-	1.6 -EXEMPT-	1.6 -EXEMPT-

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)				Calculated Threshold Value			
			dBm	mW	Right	Top	Bottom	Left tilt2	Right	Top	Bottom	Left tilt2
Main	11b	2462	17.00	50	95.34	21.63	34.17	4.90	N/A	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	11g	2462	17.00	50	95.34	21.63	34.17	4.90	N/A	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	11n20	2462	17.00	50	95.34	21.63	34.17	4.90	N/A	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	11n40	2452	17.00	50	95.34	21.63	34.17	4.90	N/A	15.7 -MEASURE-	15.7 -MEASURE-	15.7 -MEASURE-
Main	BDR	2480	8.00	6	95.34	21.63	34.17	4.90	N/A	1.9 -EXEMPT-	1.9 -EXEMPT-	1.9 -EXEMPT-
Main	EDR	2480	2.00	2	95.34	21.63	34.17	4.90	N/A	0.6 -EXEMPT-	0.6 -EXEMPT-	0.6 -EXEMPT-
Main	LE	2480	7.00	5	95.34	21.63	34.17	4.90	N/A	1.6 -EXEMPT-	1.6 -EXEMPT-	1.6 -EXEMPT-

SAR exclusion calculations for antenna <50mm from the user

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
			dBm	mW	Front	Front tilt	Rear	Left	Left tilt	Front	Front tilt	Rear	Left	Left tilt
Main	11a	5240	17.00	50	2.79	3.97	25.47	10.86	8.48	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-
Main	11n20	5240	17.00	50	2.79	3.97	25.47	10.86	8.48	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-
Main	11n40	5230	17.00	50	2.79	3.97	25.47	10.86	8.48	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-
Main	11ac20	5240	16.00	40	2.79	3.97	25.47	10.86	8.48	18.3 -MEASURE-	18.3 -MEASURE-	18.3 -MEASURE-	18.3 -MEASURE-	18.3 -MEASURE-
Main	11ac40	5230	15.00	32	2.79	3.97	25.47	10.86	8.48	14.6 -MEASURE-	14.6 -MEASURE-	14.6 -MEASURE-	14.6 -MEASURE-	14.6 -MEASURE-
Main	11ac80	5210	14.00	25	2.79	3.97	25.47	10.86	8.48	11.4 -MEASURE-	11.4 -MEASURE-	11.4 -MEASURE-	11.4 -MEASURE-	11.4 -MEASURE-

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)				Calculated Threshold Value			
			dBm	mW	Right	Top	Bottom	Left tilt2	Right	Top	Bottom	Left tilt2
Main	11a	5240	17.00	50	95.34	21.63	34.17	4.90	N/A	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-
Main	11n20	5240	17.00	50	95.34	21.63	34.17	4.90	N/A	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-
Main	11n40	5230	17.00	50	95.34	21.63	34.17	4.90	N/A	22.9 -MEASURE-	22.9 -MEASURE-	22.9 -MEASURE-
Main	11ac20	5240	16.00	40	95.34	21.63	34.17	4.90	N/A	18.3 -MEASURE-	18.3 -MEASURE-	18.3 -MEASURE-
Main	11ac40	5230	15.00	32	95.34	21.63	34.17	4.90	N/A	14.6 -MEASURE-	14.6 -MEASURE-	14.6 -MEASURE-
Main	11ac80	5210	14.00	25	95.34	21.63	34.17	4.90	N/A	11.4 -MEASURE-	11.4 -MEASURE-	11.4 -MEASURE-

2) At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following.

- a) $[(3 \cdot 50) / (\sqrt{f(\text{GHz})})] + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz}) / 150) \text{ mW}$ at > 100 MHz and ≤ 1500 MHz
b) $[(3 \cdot 50) / (\sqrt{f(\text{GHz})})] + (\text{test separation distance} - 50 \text{ mm}) \cdot 10 \text{ mW}$ at > 1500 MHz and ≤ 6 GHz

1. The upper frequency of the frequency band was used in order to calculate standalone SAR test exclusion considerations.
2. Power and distance are rounded to the nearest mW and mm before calculation
3. “N/A” displayed on below exclusion calculation means not applicable this formula since distance between antenna and surface is < 50 mm.

When output power is less than the calculated threshold value by a numerical formula above-mentioned in the following table, SAR test is excluded.

SAR exclusion calculations for antenna >50mm from the user

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
			dBm	mW	Front	Front tilt	Rear	Left	Left tilt	Front	Front tilt	Rear	Left	Left tilt
Main	11b	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11g	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11n20	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11n40	2452	17.00	50	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	BDR	2480	8.00	6	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	EDR	2480	2.00	2	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	LE	2480	7.00	5	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)				Calculated Threshold Value			
			dBm	mW	Right	Top	Bottom	Left tilt2	Right	Top	Bottom	Left tilt2
Main	11b	2462	17.00	50	95.34	21.63	34.17	4.90	549 mW -EXEMPT-	N/A	N/A	N/A
Main	11g	2462	17.00	50	95.34	21.63	34.17	4.90	549 mW -EXEMPT-	N/A	N/A	N/A
Main	11n20	2462	17.00	50	95.34	21.63	34.17	4.90	549 mW -EXEMPT-	N/A	N/A	N/A
Main	11n40	2452	17.00	50	95.34	21.63	34.17	4.90	549.2 mW -EXEMPT-	N/A	N/A	N/A
Main	BDR	2480	8.00	6	95.34	21.63	34.17	4.90	548.7 mW -EXEMPT-	N/A	N/A	N/A
Main	EDR	2480	2.00	2	95.34	21.63	34.17	4.90	548.7 mW -EXEMPT-	N/A	N/A	N/A
Main	LE	2480	7.00	5	95.34	21.63	34.17	4.90	548.7 mW -EXEMPT-	N/A	N/A	N/A

SAR exclusion calculations for antenna >50mm from the user

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
			dBm	mW	Front	Front tilt	Rear	Left	Left tilt	Front	Front tilt	Rear	Left	Left tilt
Main	11a	5240	17.00	50	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11n20	5240	17.00	50	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11n40	5230	17.00	50	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11ac20	5240	16.00	40	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11ac40	5230	15.00	32	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A
Main	11ac80	5210	14.00	25	2.79	3.97	25.47	10.86	8.48	N/A	N/A	N/A	N/A	N/A

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)				Calculated Threshold Value			
			dBm	mW	Right	Top	Bottom	Left tilt2	Right	Top	Bottom	Left tilt2
Main	11a	5240	17.00	50	95.34	21.63	34.17	4.90	518.9 mW -EXEMPT-	N/A	N/A	N/A
Main	11n20	5240	17.00	50	95.34	21.63	34.17	4.90	518.9 mW -EXEMPT-	N/A	N/A	N/A
Main	11n40	5230	17.00	50	95.34	21.63	34.17	4.90	519 mW -EXEMPT-	N/A	N/A	N/A
Main	11ac20	5240	16.00	40	95.34	21.63	34.17	4.90	518.9 mW -EXEMPT-	N/A	N/A	N/A
Main	11ac40	5230	15.00	32	95.34	21.63	34.17	4.90	519 mW -EXEMPT-	N/A	N/A	N/A
Main	11ac80	5210	14.00	25	95.34	21.63	34.17	4.90	519.1 mW -EXEMPT-	N/A	N/A	N/A

6.3 SAR test exclusion considerations according to KDB UMPC

Based on KDB941225D07, UMPC mini-tablet devices must be tested for 1-g SAR on all surfaces and side edges with a transmitting antenna location at ≤ 25 mm from that surface or edges, at 5 mm separation from a flat phantom, for the data modes, wireless technologies and frequency bands by the devices to determine SAR compliance.

KDB 941225 UMPC

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					SAR test required				
			dBm	mW	Front	Front tilt	Rear	Left	Left tilt	Front	Front tilt	Rear	Left	Left tilt
Main	11b	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11g	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11n20	2462	17.00	50	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11n40	2452	17.00	50	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	BDR	2480	8.00	6	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	EDR	2480	2.00	2	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	LE	2480	7.00	5	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)				SAR test required			
			dBm	mW	Right	Top	Bottom	Left tilt2	Right	Top	Bottom	Left tilt2
Main	11b	2462	17.00	50	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11g	2462	17.00	50	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11n20	2462	17.00	50	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11n40	2452	17.00	50	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	BDR	2480	8.00	6	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	EDR	2480	2.00	2	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	LE	2480	7.00	5	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE

KDB 941225 UMPC

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					SAR test required				
			dBm	mW	Front	Front tilt	Rear	Left	Left tilt	Front	Front tilt	Rear	Left	Left tilt
Main	11a	5240	17.00	50	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11n20	5240	17.00	50	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11n40	5230	17.00	50	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11ac20	5240	16.00	40	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11ac40	5230	15.00	32	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE
Main	11ac80	5210	14.00	25	2.79	3.97	25.47	10.86	8.48	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)				SAR test required			
			dBm	mW	Right	Top	Bottom	Left tilt2	Right	Top	Bottom	Left tilt2
Main	11a	5240	17.00	50	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11n20	5240	17.00	50	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11n40	5230	17.00	50	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11ac20	5240	16.00	40	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11ac40	5230	15.00	32	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE
Main	11ac80	5210	14.00	25	95.34	21.63	34.17	4.90	EXEMPT	MEASURE	EXEMPT	MEASURE

SECTION7: Description of the Body setup

7.1 Procedure for SAR test position determination

-The tested procedure was performed according to the KDB 941225 D07 (SAR Evaluation Procedures for UMPC Mini-Tablet Devices)

7.2 Test position for Body setup

WLAN 2.4GHz

No.	Position	Test distance	WLAN2.4GHz
			Tested
1	Front	0mm	☒
2	Front tilt	0mm	☒
3	Rear	0mm	☐
4	Left	0mm	☒
5	Left tilt	0mm	☒
6	Right	0mm	☐
7	Top	0mm	☒
8	Bottom	0mm	☐
9	Left tilt2	0mm	☒

*The test was conservatively performed with test distance 0mm.

WLAN 5.2GHz

No.	Position	Test distance	WLAN5.2GHz
			Tested
1	Front	5mm	☒
2	Front tilt	5mm	☒
3	Rear	0mm	☐
4	Left	0mm	☒
5	Left tilt	0mm	☒
6	Right	0mm	☐
7	Top	0mm	☒
8	Bottom	0mm	☐
9	Left tilt2	0mm	☒

*Front and Front tilt: The test was performed with test distance 5mm according to the KDB 941225 D07.

*Left, Left tilt and Top position: The test was conservatively performed with test distance 0mm.

SECTION8: Description of the operating mode

8.1 Output Power and SAR test required

According to KDB248227D01, The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

1. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
2. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
3. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

Wi-Fi 2.4GHz (DTS Band)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Tune-up upper Power (dBm)	Measured average Power (dBm)	Initial SAR Test Configuration	Note(s)
2.4	11b	1 Mbps	1	2412	17.0	15.18	Yes	2
			6	2437	17.0	15.04		
			11	2462	17.0	15.16		
	11g	6 Mbps	1	2412	17.0	-	-	1
			6	2437	17.0	-		
			11	2462	17.0	-		
	11n	6.5 Mbps	1	2412	17.0	-	-	1
			6	2437	17.0	-		
			11	2462	17.0	-		
	11n40	13.5 Mbps	3	2422	17.0	-	-	1
			6	2437	17.0	-		
			9	2452	17.0	-		

*1 According to KDB248227D01, SAR is not required for 802.11g/n HT20/HT40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. Refer to section 8.

*2 Initial SAR test channel was chosen. (shaded blue frame)

WLAN 5GHz (U-NII-1 Band)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Tune-up upper Power (dBm)	Measured average Power (dBm)	Initial SAR Test Configuration	Note(s)
5.2	11a	6 Mbps	36	5180	17.0	-	-	1
			40	5200	17.0	-		
			44	5220	17.0	-		
			48	5240	17.0	-		
	11n20	6.5 Mbps	36	5180	17.0	-	-	1
			40	5200	17.0	-		
			44	5220	17.0	-		
			48	5240	17.0	-		
	11n40	13.5 Mbps	38	5190	17.0	15.15	Yes	2
			46	5230	17.0	15.14		
	11ac20	6.5 Mbps	36	5180	16.0	-	-	
			40	5200	16.0	-		
			44	5220	16.0	-		
			48	5240	16.0	-		
	11ac40	13.5 Mbps	38	5190	15.0	-	-	
			46	5230	15.0	-		
	11ac80	29.3 Mbps	42	5210	14.0	-	-	

*1 When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel with the largest bandwidth and lowest data rate is selected.

*2 Initial SAR test channel was chosen. (shaded blue frame)

SECTION9: Test surrounding

9.1 Measurement uncertainty

This measurement uncertainty budget is suggested by IEEE Std 1528(2013) and IEC62209-2:2010, and determined by Schmid & Partner Engineering AG (DASY5 Uncertainty Budget). Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz Section 2.8.1., when the highest measured SAR(1g) within a frequency band is < 1.5W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std.1528 (2013) is not required in SAR reports submitted for equipment approval.

<Body>

Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std.Unc. (10g)
Measurement System							
Probe Calibration	± 6.55 %	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	± 4.7 %	R	√3	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	± 9.6 %	R	√3	0.7	0.7	±3.9%	±3.9%
Linearity	± 4.7 %	R	√3	1	1	±2.7%	±2.7%
Modulation Response	± 2.4 %	R	√3	1	1	±1.4%	±1.4%
System Detection Limits	± 1.0 %	R	√3	1	1	±0.6%	±0.6%
Boundary Effects	± 2.0 %	R	√3	1	1	±1.2%	±1.2%
Readout Electronics	± 0.3 %	N	1	1	1	±0.3%	±0.3%
Response Time	± 0.8 %	R	√3	1	1	±0.5%	±0.5%
Integration Time	± 2.6 %	R	√3	1	1	±1.5%	±1.5%
RF Ambient Noise	± 3.0 %	R	√3	1	1	±1.7%	±1.7%
RF Ambient Reflections	± 3.0 %	R	√3	1	1	±1.7%	±1.7%
Probe Positioner	± 0.04 %	R	√3	1	1	±0.0%	±0.0%
Probe Positioning	± 0.8 %	R	√3	1	1	±0.5%	±0.5%
Post-processing	± 4.0 %	R	√3	1	1	±2.3%	±2.3%
Test Sample Related							
Device Holder	± 3.6 %	N	1	1	1	±3.6%	±3.6%
Test sample Positioning	± 2.9 %	N	1	1	1	±2.9%	±2.9%
Power Scaling	± 0.0 %	R	√3	1	1	±0.0%	±0.0%
Power Drift	± 5.0 %	R	√3	1	1	±2.9%	±2.9%
Phantom and Setup							
Phantom Uncertainty	± 7.6 %	R	√3	1	1	±4.4%	±4.4%
SAR correction	± 1.9 %	N	1	1	0.84	±1.9%	±1.6%
Liquid Conductivity (mea.)	+ 4.4 %	N	1	0.78	0.71	±3.4%	±3.1%
Liquid Permittivity (mea.)	- 4.2 %	N	1	0.23	0.26	±1.0%	±1.1%
Temp. unc. - Conductivity	± 3.4 %	R	√3	0.78	0.71	±1.5%	±1.4%
Temp. unc. - Permittivity	± 0.4 %	R	√3	0.23	0.26	±0.1%	±0.1%
Combined Std. Uncertainty						±12.4%	±12.3%
Expanded STD Uncertainty (κ =2)						±24.9%	±24.6%

Note: This uncertainty budget for validation is worst-case.
Table of uncertainties are listed for ISO/IEC 17025.

SECTION10: Parameter Check

The dielectric parameters were checked prior to assessment using the DAK dielectric probe kit.
The dielectric parameters measurement is reported in each correspondent section.

According to KDB865664 D01, +/- 5% tolerances are required for ϵ_r and σ and then below table which is the target value of the simulated tissue liquid is quoted from KDB865664 D01.

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

10.1 For SAR system check

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
2019/4/2	24.0	44	MBBL 600-6000	23.5	2450	σ [mho/m]	1.95	2.03	4.2	+/-5	*1
						ϵ_r	52.7	52.2	-0.9	+/-5	
2019/6/16	24.0	40	MBBL 600-6000	23.5	2450	σ [mho/m]	1.95	2.01	2.9	+/-5	*1
						ϵ_r	52.7	51.4	-2.5	+/-5	

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
2019/4/3	24.0	42	MBBL 600-6000	23.5	5250	σ [mho/m]	5.36	5.38	0.5	+/-5	*2
						ϵ_r	48.9	47.2	-3.6	+/-5	
2019/6/16	24.0	40	MBBL 600-6000	23.5	5250	σ [mho/m]	5.36	5.36	0.1	+/-5	*2
						ϵ_r	48.9	46.9	-4.1	+/-5	

σ : Conductivity / ϵ_r : Relative Permittivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

Correlation confirmation with measured TSL parameters of the calibration certificate of system check dipoles (Refer to Appendix 3)

+/- 6% limit for deviation provided by manufacture tolerances are required for ϵ_r and σ and then below table which is the target value of the simulated tissue liquid is quoted from data measured TSL parameters of dipole calibration.

Freq [MHz]	Model,S/N	Head		Body	
		ϵ	σ	ϵ	σ
2450	D2450,713	37.9	1.88	51.6	2.04
5250	D5GHV2,1020	35.7	4.58	47.5	5.46

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value*1	Measured	Deviation [%]	Limit [%]	Remark
2019/4/2	24.0	44	MBBL 600-6000	23.5	2450	σ [mho/m]	2.04	2.03	-0.4	+/-6	*1
						ϵ_r	51.6	52.2	1.2	+/-6	
2019/6/16	24.0	40	MBBL 600-6000	23.5	2450	σ [mho/m]	2.04	2.03	-0.4	+/-6	*1
						ϵ_r	51.6	52.2	1.2	+/-6	

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value*1	Measured	Deviation [%]	Limit [%]	Remark
2019/4/3	24.0	42	MBBL 600-6000	23.5	5250	σ [mho/m]	5.46	5.38	-1.4	+/-6	*1
						ϵ_r	47.5	47.2	-0.7	+/-6	
2019/6/16	24.0	40	MBBL 600-6000	23.5	5250	σ [mho/m]	5.46	5.36	-1.8	+/-6	*1
						ϵ_r	47.5	46.9	-1.2	+/-6	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in each Dipole.

10.2 For SAR measurement

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
2019/4/2	24.0	44	MBBL 600-6000	23.5	2412	σ [mho/m]	1.91	2.00	4.4	+/-5	*2
						ϵ_r	52.8	52.3	-0.9	+/-5	
2019/4/2	24.0	44	MBBL 600-6000	23.5	2437	σ [mho/m]	1.94	2.02	4.3	+/-5	*2
						ϵ_r	52.7	52.2	-0.9	+/-5	
2019/4/2	24.0	44	MBBL 600-6000	23.5	2462	σ [mho/m]	1.97	2.04	3.9	+/-5	*2
						ϵ_r	52.7	52.2	-0.9	+/-5	
2019/6/16	24.0	40	MBBL 600-6000	23.5	2412	σ [mho/m]	1.91	1.97	2.9	+/-5	*2
						ϵ_r	52.8	51.3	-2.7	+/-5	

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
2019/4/3	24.0	42	MBBL 600-6000	23.5	5190	σ [mho/m]	5.29	5.27	-0.4	+/-5	*2
						ϵ_r	49.0	47.3	-3.5	+/-5	
2019/4/3	24.0	42	MBBL 600-6000	23.5	5230	σ [mho/m]	5.33	5.34	0.0	+/-5	*2
						ϵ_r	49.0	47.2	-3.6	+/-5	
2019/6/16	24.0	40	MBBL 600-6000	23.5	5190	σ [mho/m]	5.29	5.22	-1.3	+/-5	*2
						ϵ_r	49.0	47.0	-4.2	+/-5	

σ : Conductivity / ϵ_r : Relative Permittivity

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

SECTION11: System Check confirmation

The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.

The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.

The DASY system with an E-Field Probe was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom).

The standard measuring distance was 10 mm (above 1GHz to 6GHz) and 15 mm (below 1GHz) from dipole center to the simulating liquid surface.

The coarse grid with a grid spacing of 12 mm (1GHz to 3GHz) and 15 mm (below 1GHz) was aligned with the dipole.

For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.

Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.

Distance between probe sensors and phantom surface was set to 3 mm.

For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm

The dipole input power (forward power) was 100 mW (For 5GHz band) or 250 mW (For other band).

The results are normalized to 1 W input power.

Target Value

Freq [MHz]	Model,S/N	Head		Body	
		(SPEAG) 1g [W/kg]	(SPEAG) 10g[W/kg]	(SPEAG) 1g [W/kg]	(SPEAG) 10g[W/kg]
2450	D2450,713	53.60	24.92	52.00	24.44
5250	D5GHV2,1020	82.20	23.70	76.80	21.50

The target(reference) SAR values can be obtained from the calibration certificate of system validation dipoles(Refer to Appendix 2). The target SAR values are SAR measured value in the calibration certificate scaled to 1W.

Date Tested	Test Freq	Model,S/N	T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ± 10 %
				Zoom Scan	Normalize to 1 W		
2019/4/2	2450	D2450,713	Body	1g	12.50	50.0	-3.8
				10g	5.74	23.0	-6.1
2019/4/3	5250	D5GHV2,1020	Body	1g	7.92	79.2	3.1
				10g	2.20	22.00	2.3
2019/6/16	2450	D2450,713	Body	1g	12.30	49.2	-5.4
				10g	5.70	22.80	-6.7
2019/6/16	5250	D5GHV2,1020	Body	1g	7.66	76.60	-0.3
				10g	2.14	21.40	-0.5

SECTION12: Measured and Reported (Scaled) SAR Results

WLAN SAR Test Reduction criteria are as follows

● **KDB 248227 D01 (SAR Guidance for 802.11(Wi-Fi) Transmitters):**

SAR test reduction for 802.11 WLAN transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ✧ ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- ✧ > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- ✧ For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- ✧ When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- ✧ When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

SAR Test Reduction criteria are as follows

KDB 447498 D01 (General RF Exposure Guidance):

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ◇ ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ◇ ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ◇ ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

- According to Notice 2016-DRS001 based on the IEEE1528 and IEC 62209 requirements, the low, mid and high frequency channels for the configuration with the highest SAR value must be tested regardless of the SAR value measured.
- When reported SAR value is exceed 1.2W/kg(if any), device holder perturbation verification is required; however, since distance between device holder and antenna of EUT is enough, it was not conducted.
- Reported SAR= Measured SAR [W/kg] · Scaled factor
 - * Power scaled factor = Maximum tune-up tolerance limit [mW] / Measured power [mW]
 - * Duty scaled factor = 100 / Duty[%]
- Maximum tune-up tolerance limit is by the specification from a customer.

Note: Measured value is rounded round off to three decimal places

12.1 WLAN 2.4GHz Band

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		Power Scaled factor	Duty Scaled factor	1-g SAR (W/kg)		Note
					Tune-up upper Power	Measured average Power			Meas.	Reported	
Front	11b	0	1	2412	17.00	15.18	1.521	1.005	0.138	0.211	
			6	2437	17.00	15.04	1.570	1.005			
			11	2462	17.00	15.16	1.528	1.005			
Front tilt	11b	0	1	2412	17.00	15.18	1.521	1.005	0.297	0.454	
			6	2437	17.00	15.04	1.570	1.005	0.203	0.320	*1
			11	2462	17.00	15.16	1.528	1.005	0.123	0.189	*1
Left	11b	0	1	2412	17.00	15.18	1.521	1.005	0.041	0.063	
			6	2437	17.00	15.04	1.570	1.005			
			11	2462	17.00	15.16	1.528	1.005			
Left tilt	11b	0	1	2412	17.00	15.18	1.521	1.005	0.050	0.076	
			6	2437	17.00	15.04	1.570	1.005			
			11	2462	17.00	15.16	1.528	1.005			
Top	11b	0	1	2412	17.00	15.18	1.521	1.005	0.013	0.020	
			6	2437	17.00	15.04	1.570	1.005			
			11	2462	17.00	15.16	1.528	1.005			
Left tilt2	11b	0	1	2412	17.00	15.18	1.521	1.005	0.046	0.070	
			6	2437	17.00	15.04	1.570	1.005			
			11	2462	17.00	15.16	1.528	1.005			

Note(s):

*1 Other channel of worst position.

OFDM was excluded from the following table according to KDB248227D01.

SAR is not required for the following 2.4 GHz OFDM conditions according to KDB248227D01.

- 1) When KDB447498D01 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Maximum tune-up tolerance limit		Maximum tune-up tolerance limit		OFDM scaled factor	Position	DSSS Reported SAR value [W/kg]	OFDM Estimated SAR value [W/kg]	Exclusion limit [W/kg]	Standalone SAR request
DSSS		OFDM							
[dBm]	[mW]	[dBm]	[mW]						
17.00	50.12	17.00	50.12	1.000	Front tilt	0.454	0.454	< 1.2	No

Note(s):

- OFDM scaled factor = Maximum tune-up tolerance limit of OFDM [mW] / Maximum tune-up tolerance limit of DSSS [mW]
- Estimated SAR of OFDM = Reported SAR of DSSS [W/kg] · OFDM scaled factor

12.2 WLAN 5.2GHz Band

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		Power Scaled factor	Duty Scaled factor	1-g SAR (W/kg)		Note
					Tune-up upper Power	Measured average Power			Meas.	Reported	
Front	11n40	5	38	5190	17.00	15.15	1.530	1.141	0.395	0.690	
			46	5230	17.00	15.14	1.534	1.141	0.472	0.826	
Front tilt	11n40	5	38	5190	17.00	15.15	1.530	1.141	0.308	0.538	
			46	5230	17.00	15.14	1.534	1.141			
Left	11n40	0	38	5190	17.00	15.15	1.530	1.141	0.094	0.164	
			46	5230	17.00	15.14	1.534	1.141			
Left tilt	11n40	0	38	5190	17.00	15.15	1.530	1.141	0.190	0.332	
			46	5230	17.00	15.14	1.534	1.141			
Top	11n40	0	38	5190	17.00	15.15	1.530	1.141	0.152	0.265	
			46	5230	17.00	15.14	1.534	1.141			
Left tilt2	11n40	0	38	5190	17.00	15.15	1.530	1.141	0.486	0.848	
			46	5230	17.00	15.14	1.534	1.141	0.409	0.716	*1

Note(s):

*1 Other channel of worst position.

12.3 Repeated measurement

According to KDB865664 D1.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Wireless Technologies	Test Configuration			Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Plot No.
	Transmit Antenna	Exposure	Position					Original	Repeated		
WLAN 2.4 GHz	Main	Body	Front tilt	11b	0	1	2412	0.297	N/A	N/A	-
WLAN 5.2 GHz	Main	Body	Left tilt2	11n40	0	38	5190	0.486	N/A	N/A	-

Note(s):

N/A: Repeated Measurement is not required since the original highest measured SAR for all band is < 0.80 W/kg.

SECTION13: Test instruments

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MDA-07	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	713	SAR(D2450)	2016/09/13 * 36
MDA-08	Dipole Antenna	Schmid&Partner Engineering AG	D5GHzV2	1020	SAR(D5G)	2018/11/09 * 12
COTS-MSAR-03	Dasy5	Schmid&Partner Engineering AG	DASY5	-	SAR	-
MMBBL600-6000	Body Simulating Liquid	Schmid&Partner Engineering AG	SL AAB U16 BC	-	SAR	Pre Check
MNA-03	Vector Reflectometer	Copper Mountain Technologies	PLANAR R140	0030913	SAR	2018/04/11 * 12 *1)
MNA-03	Vector Reflectometer	Copper Mountain Technologies	PLANAR R140	0030913	SAR	2019/04/01 * 12
MDPK-03	Dielectric assessment kit	Schmid&Partner Engineering AG	DAK-3.5	0008	SAR	2018/04/10 * 12 *1)
MDPK-03	Dielectric assessment kit	Schmid&Partner Engineering AG	DAK-3.5	0008	SAR	2019/04/09 * 12
MOS-37	Digital thermometer	LKM electronic	DTM3000	-	SAR	2018/07/30 * 12
COTS-MSAR-04	Dielectric assessment software	Schmid&Partner Engineering AG	DAK	-	SAR	-
MDAE-01	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	509	SAR	2018/07/11 * 12
MPB-07	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3825	SAR	2018/12/10 * 12
MPF-02	2mm Oval Flat Phantom	Schmid&Partner Engineering AG	QDOVA001BB	1045	SAR	2018/05/08 * 12 *1)
MPF-03	2mm Oval Flat Phantom	Schmid&Partner Engineering AG	QDOVA001BB	1203	SAR	2019/05/14 * 12
MDH-01	Device holder	Schmid&Partner Engineering AG	Mounting device for transmitter	-	SAR	Pre Check
MDH-04	Device holder	Schmid&Partner Engineering AG	Mounting device for transmitter	-	SAR	Pre Check
MOS-33	Thermo-Hygrometer	CUSTOM	CTH-201	3301	SAR	2018/07/30 * 12
MOS-35	Digital thermometer	HANNA	Checktemp 4	-	SAR	2018/07/30 * 12
MRBT-02	SAR robot	Schmid&Partner Engineering AG	TX60 Lspeag	F10/5E3LA1/A/01	SAR	2018/09/04 * 12
MRBT-03	SAR robot	Schmid&Partner Engineering AG	TX60 Lspeag	F13/5PPLD1/A/01	SAR	2019/04/26 * 12
MPM-11	Dual Power Meter	Agilent	E4419B	MY45102060	SAR	2018/08/07 * 12
MPSE-15	Power sensor	Agilent	E9301A	MY41498311	SAR	2018/08/07 * 12
MPSE-16	Power sensor	Agilent	E9301A	MY41498313	SAR	2018/08/07 * 12
MRFA-24	Pre Amplifier	R&K	R&K CGA020M602-2633R	B30550	SAR	2018/06/20 * 12
MSG-10	Signal Generator	Agilent	N5181A	MY47421098	SAR	2018/11/14 * 12
MAT-78	Attenuator	Telegraftrner	J01156A0011	0042294119	SAR	Pre Check
MAT-81	Attenuator	Weinschel Associates	WA1-20-33	100131	SAR	2019/04/02 * 12
MPSE-24	Power sensor	Anritsu Limited	MA24106A	1026164	SAR	2018/08/07 * 12
COTS-MPSE-02	Software for MA24106A	Anritsu Limited	Anritsu PowerXpert	-	SAR	-
MHDC-12	Dual Directional Coupler	Hewlett Packard	772D	2839A0016	SAR(2-18GHz)	Pre Check

*1) This test equipment was used for the tests before the expiration date of the calibration.

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

SAR room is checked before every testing and ambient noise is <0.012W/kg

APPENDIX 1 : System Check

20190402 Body 2450MHz System Check Power 250mW

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.032$ S/m; $\epsilon_r = 52.219$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2450 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Area Scan (81x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 21.3 W/kg

Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.7 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 25.3 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.74 W/kg


Maximum value of SAR (measured) = 20.5 W/kg

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 10.4 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

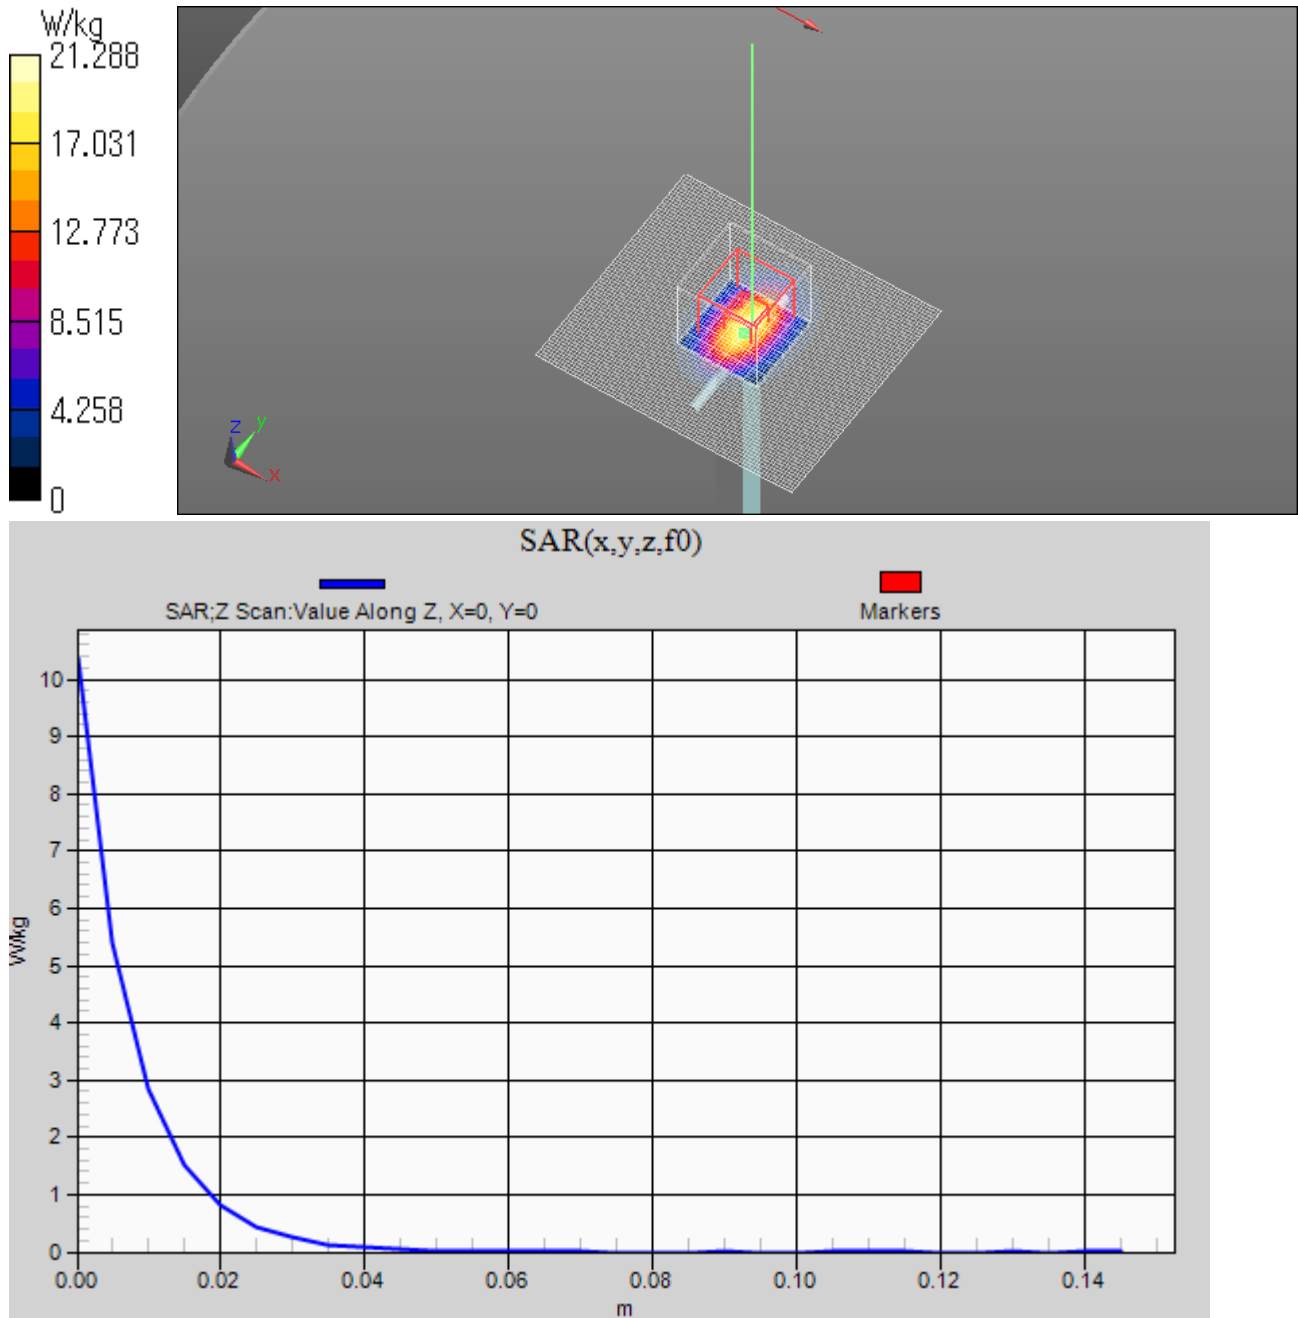

20190403 Body 5250MHz System Check Power 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.382$ S/m; $\epsilon_r = 47.161$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5250 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.6 W/kg

Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.32 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.2 W/kg


Maximum value of SAR (measured) = 18.6 W/kg

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 4.55 W/kg

Date: 2019/04/03

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

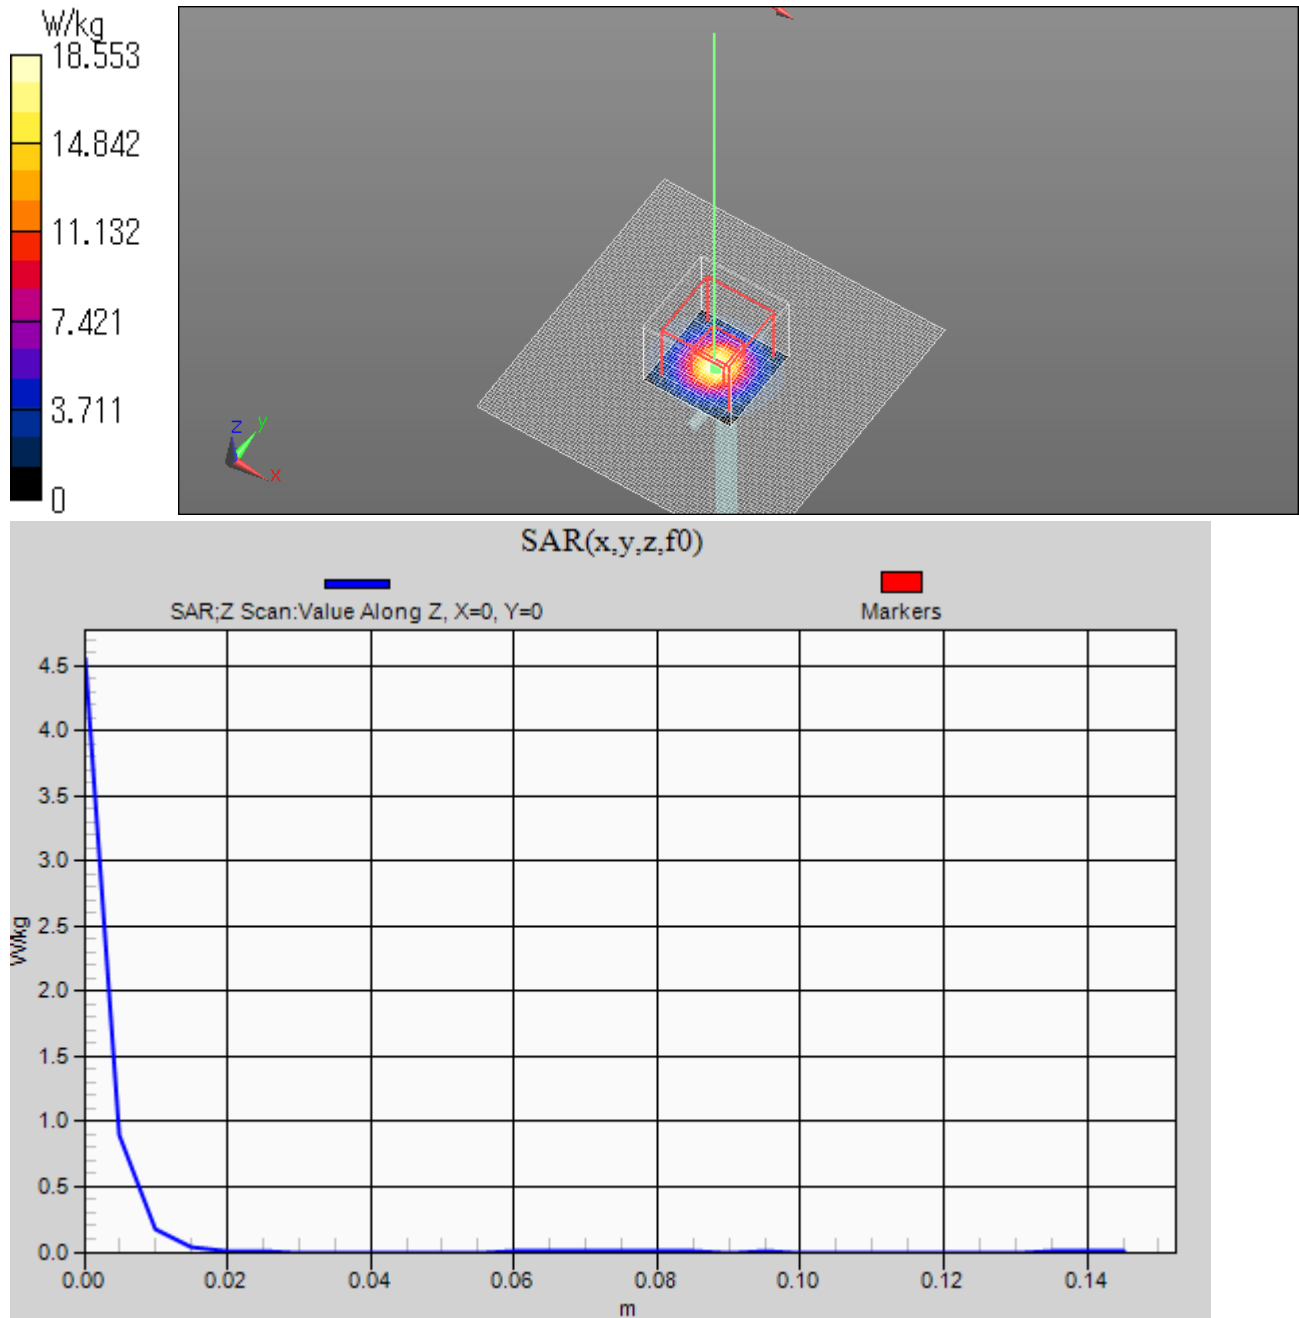

20190613 Body 2450MHz System Check Power 250mW

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.006$ S/m; $\epsilon_r = 51.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2450 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Area Scan (81x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.8 W/kg

Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.8 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 24.9 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.7 W/kg


Maximum value of SAR (measured) = 20.2 W/kg

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 10.2 W/kg

Date: 2019/06/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

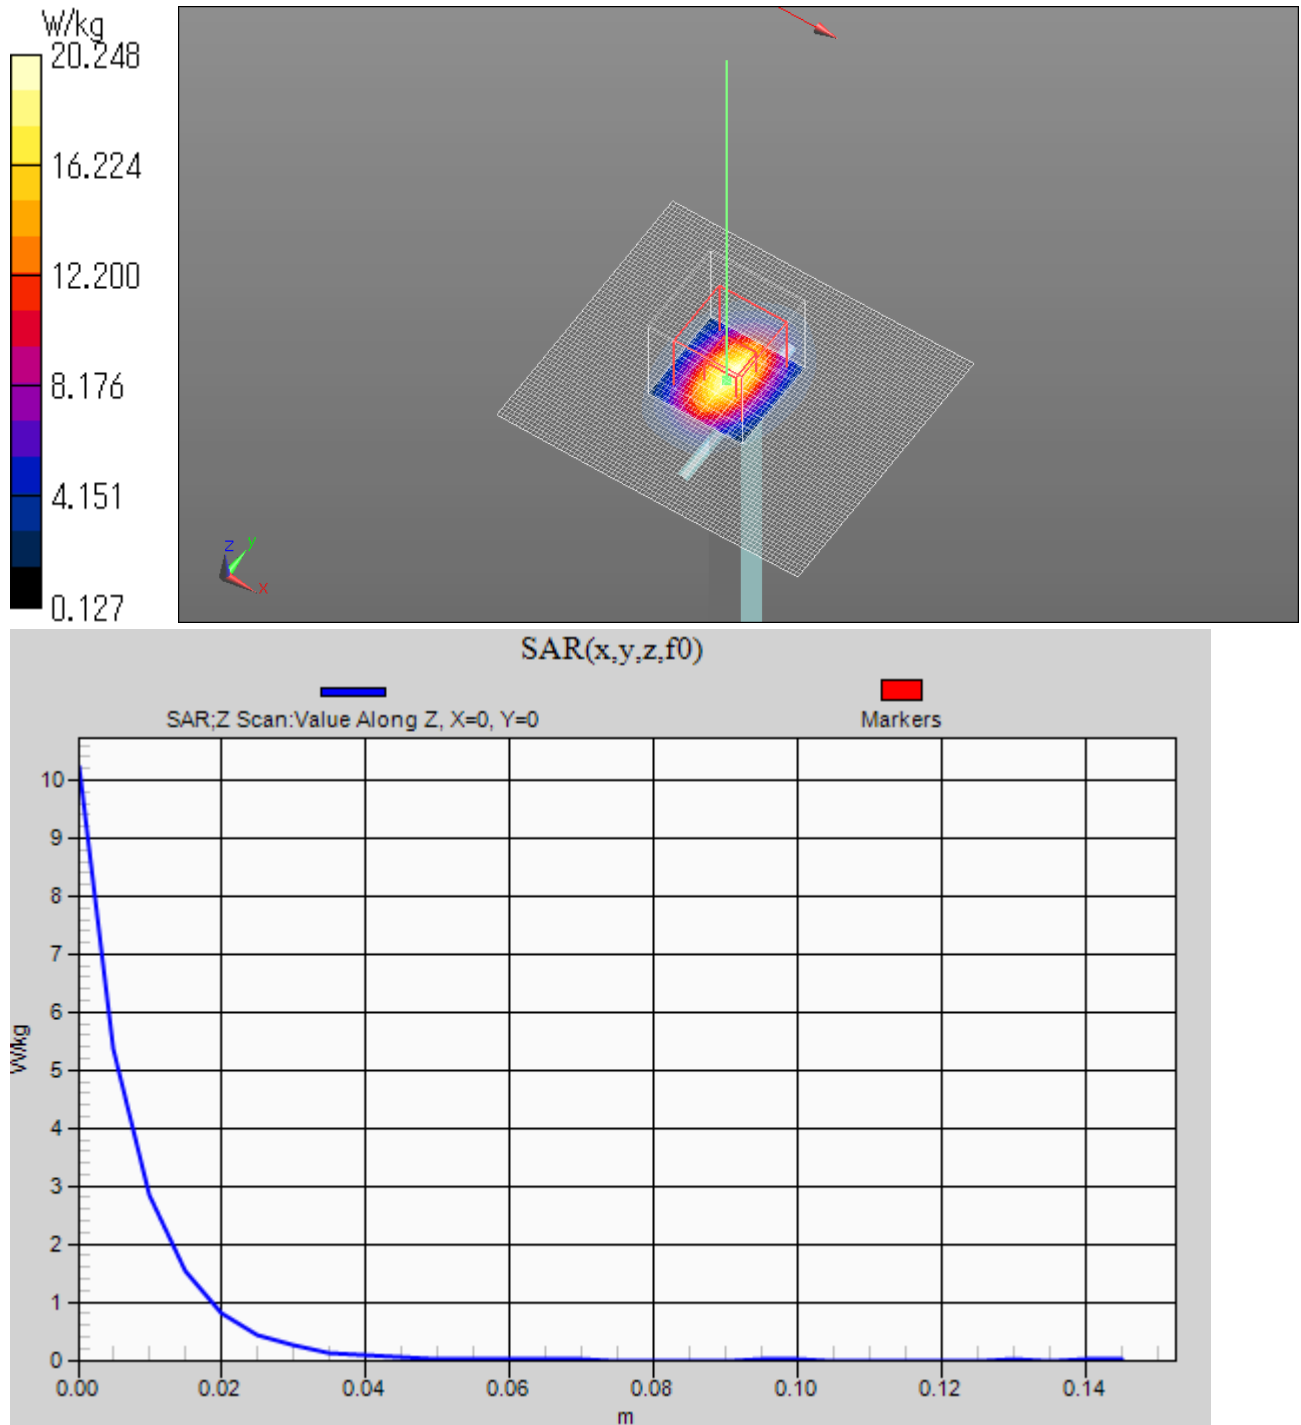

20190613 Body 5250MHz System Check Power 100mW

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.363$ S/m; $\epsilon_r = 46.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5250 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 17.2 W/kg

Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 68.55 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.14 W/kg


Maximum value of SAR (measured) = 17.7 W/kg

Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Maximum value of SAR (measured) = 4.51 W/kg

Date: 2019/06/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

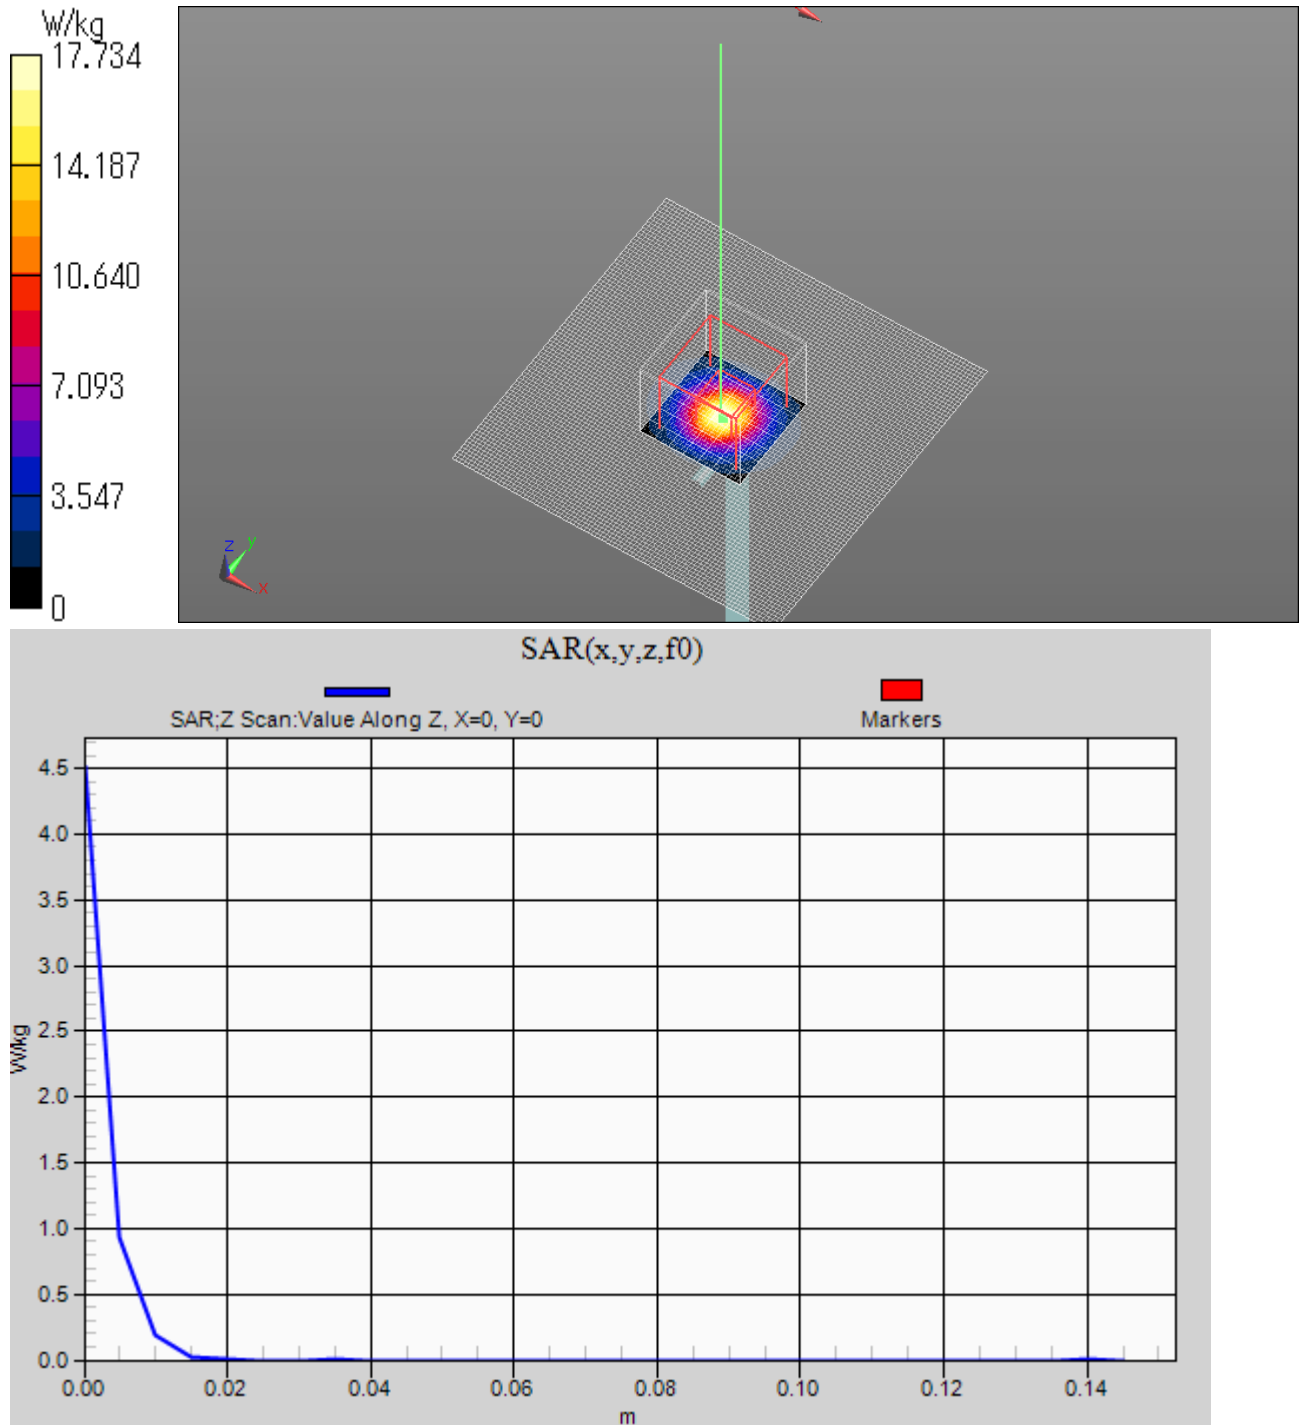

APPENDIX 2 : SAR Measurement data

Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 15 mm x 15 mm, 12 mm x 12 mm or 10mm x 10mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan), a volume of 30mm x 30mm x 30mm or more was assessed by measuring 7 x 7 x 7 points at least for below 3GHz and a volume of 28 mm x 28mm x 22.5mm or more was assessed by measuring 8 x 8 x 6(ratio step method (*1)) points at least for 5GHz band.

And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

(1). The data at the surface were extrapolated, since the center of the dipoles is 1mm(EX3DV4) away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

(2). The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

(3). All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

***1. Ratio step method parameters used;**

The first measurement point: 2mm from the phantom surface, the initial grid separation: 2mm, subsequent graded grid ratio: 1.5

These parameters comply with the requirement of the KDB 865664D01.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

Confirmation after SAR testing

It was checked that the power drift [W] is within +/-5%.The verification of power drift during the SAR test is that DASY5 system calculates the power drift by measuring the e-field at the same location at beginning and the end of the scan measurement for each test position.

DASY5 system calculation Power drift value[dB] = $20\log(E_a)/(E_b)$

Before SAR testing : $E_b[V/m]$

After SAR testing : $E_a[V/m]$

Limit of power drift[W] = +/-5%

$X[dB]=10\log[P]=10\log(1.05/1)=10\log(1.05)-10\log(1)=0.212dB$

from E-field relations with power.

$p=E^2/\eta=E^2/$

Therefore, The correlation of power and the E-field

$XdB=10\log(P)=10\log(E)^2=20\log(E)$

Therefore,

The calculated power drift of DASY5 System must be the less than +/-0.212dB.

Measurement data WLAN 2.4GHz

WLAN 2.4G 11b 1Mbps 2412MHz Front 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 52.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2412 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Front/Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.243 W/kg

WLAN 2.4GHz/11b Front/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.30 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.363 W/kg


SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.052 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.275 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

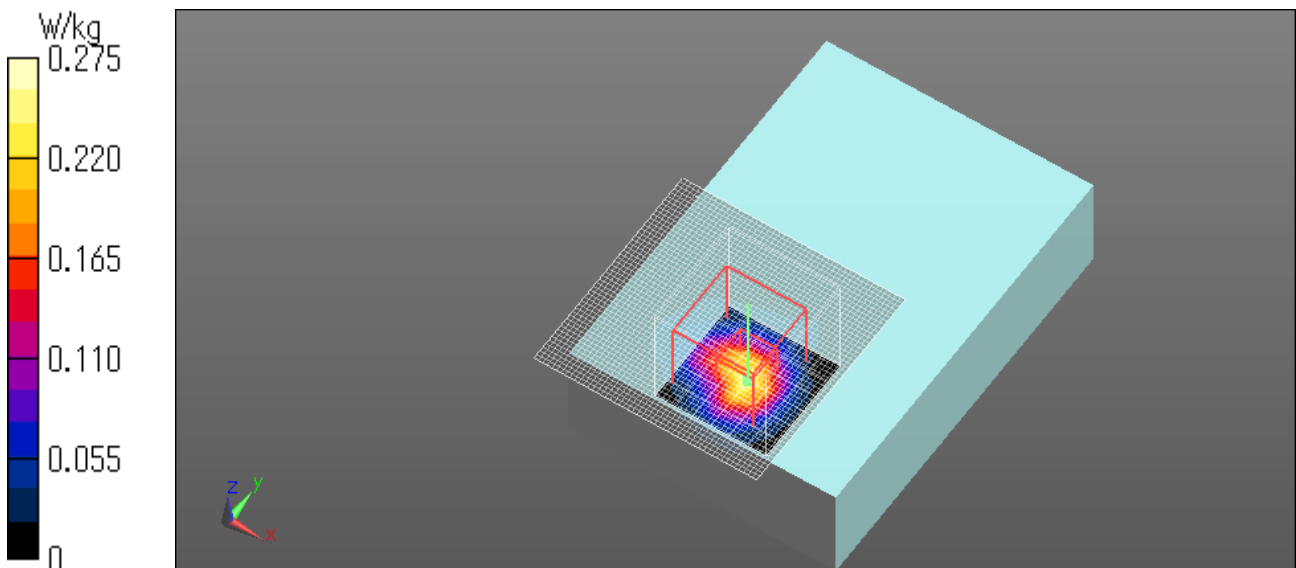

WLAN 2.4G 11b 1Mbps 2412MHz Front tilt 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 52.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2412 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Front tilt/Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.766 W/kg

WLAN 2.4GHz/11b Front tilt/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.59 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.973 W/kg


SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.104 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.626 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

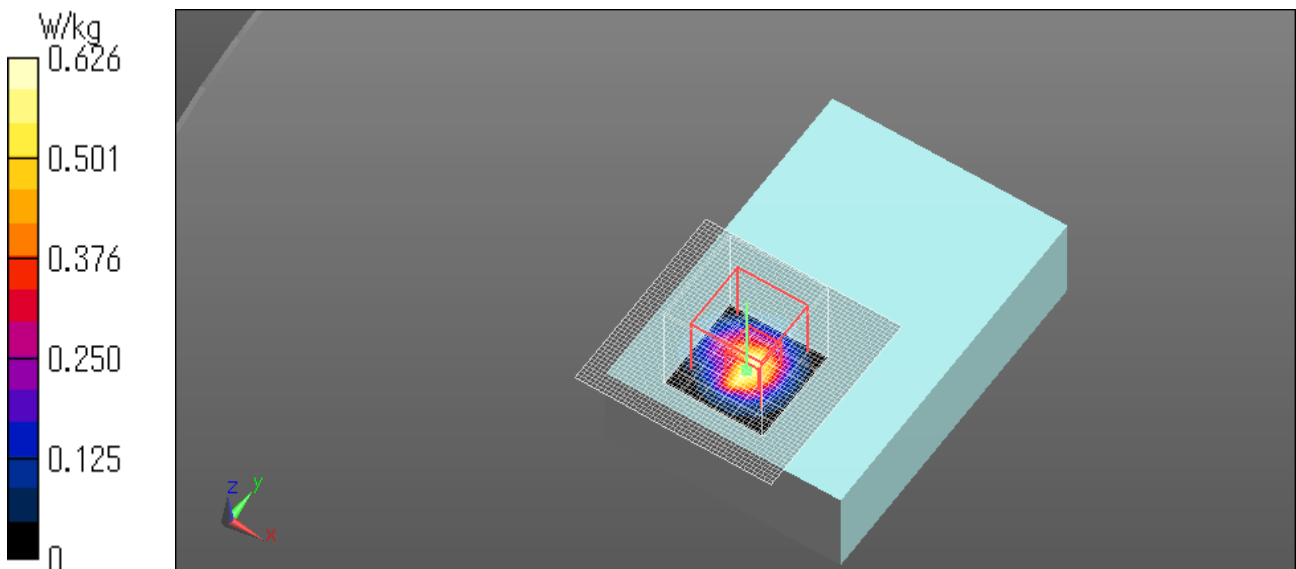

WLAN 2.4G 11b 1Mbps 2437MHz Front tilt 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11b/g/n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 52.23$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2437 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Front tilt other channel1/Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.487 W/kg

WLAN 2.4GHz/11b Front tilt other channel1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.20 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.703 W/kg


SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.070 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.473 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

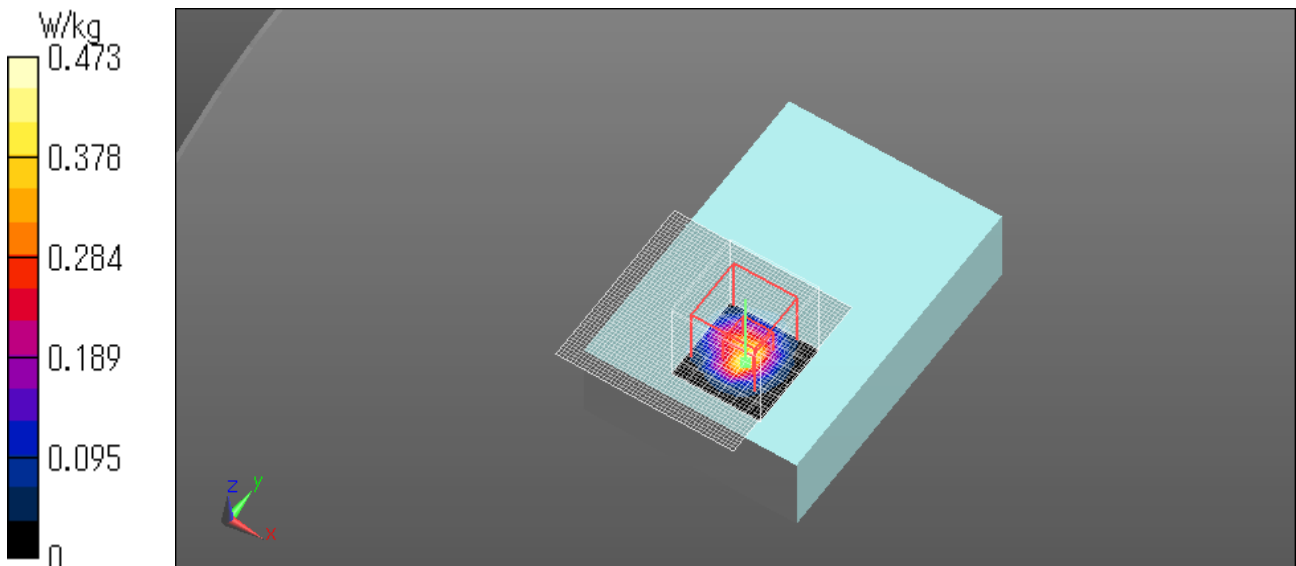

WLAN 2.4G 11b 1Mbps 2462MHz Front tilt 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11b/g/n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 2.043 \text{ S/m}$; $\epsilon_r = 52.203$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2462 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Front tilt other channel 2/Area Scan (51x51x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.308 W/kg

WLAN 2.4GHz/11b Front tilt other channel 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.51 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.414 W/kg


SAR(1 g) = 0.123 W/kg ; SAR(10 g) = 0.041 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.253 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

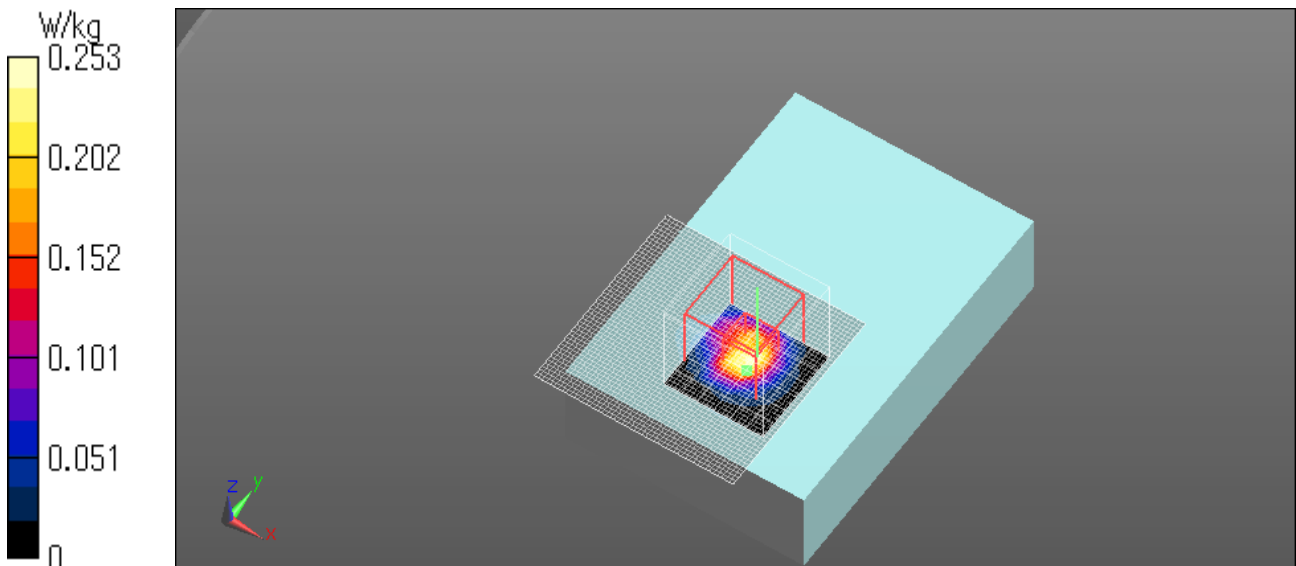

WLAN 2.4G 11b 1Mbps 2412MHz Left 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 52.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2412 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Left/Area Scan (51x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.0749 W/kg

WLAN 2.4GHz/11b Left/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.454 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0980 W/kg


SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.016 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0738 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

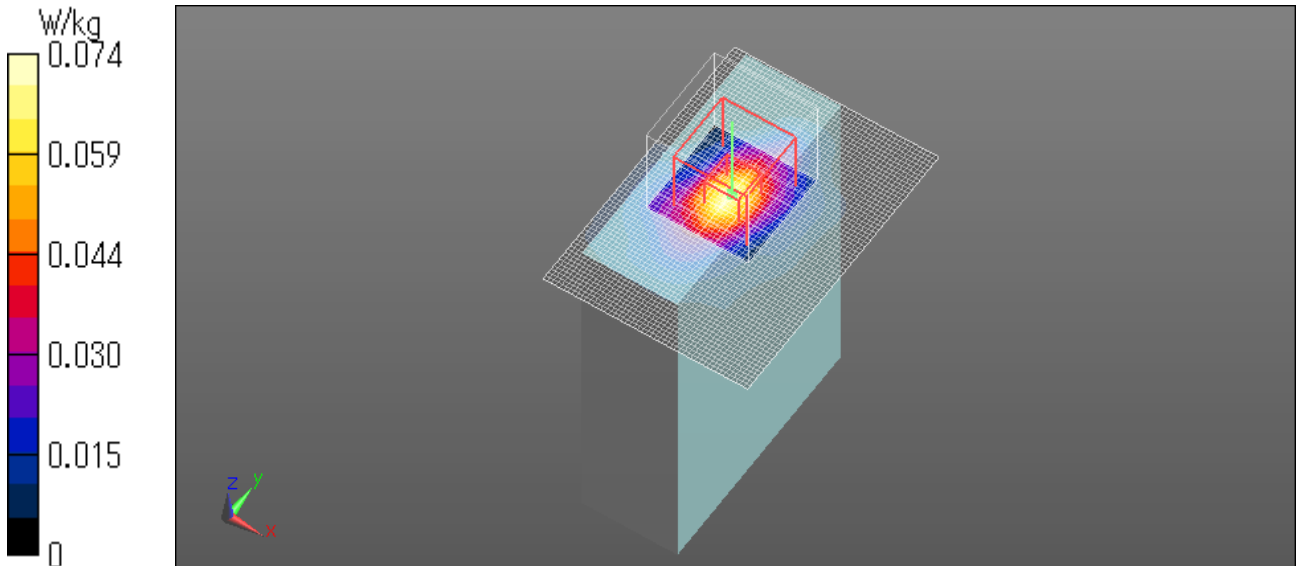

WLAN 2.4G 11b 1Mbps 2412MHz Left tilt 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 52.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2412 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Left tilt/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.101 W/kg

WLAN 2.4GHz/11b Left tilt/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.828 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.123 W/kg


SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.024 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0839 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

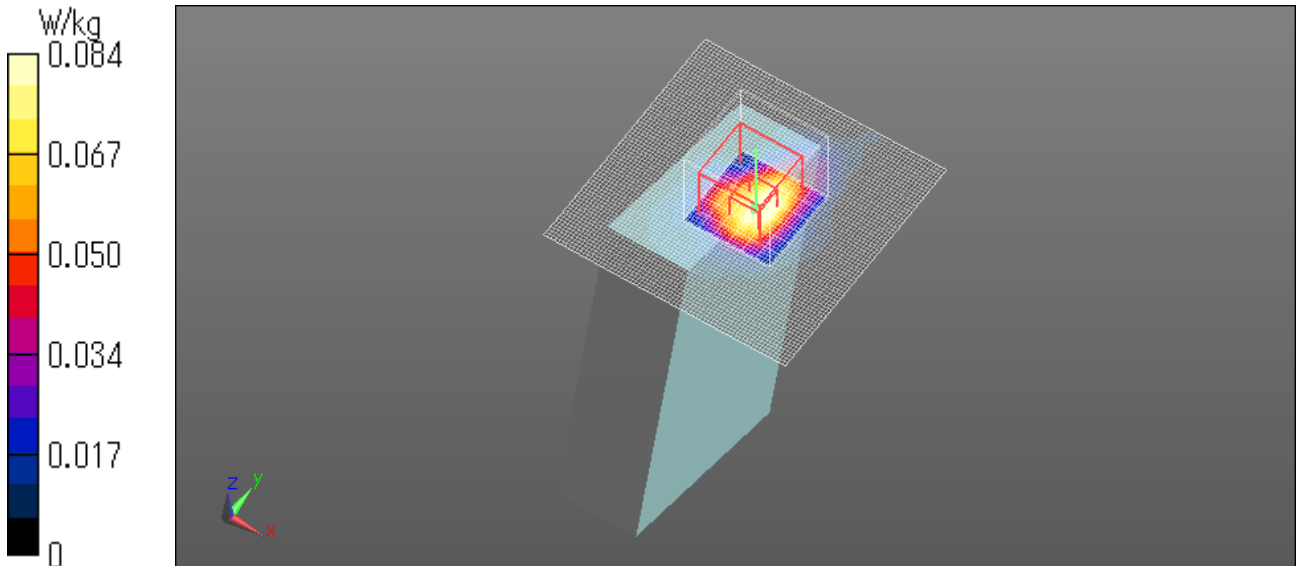

WLAN 2.4G 11b 1Mbps 2412MHz Top 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 52.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2412 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Top/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.0238 W/kg

WLAN 2.4GHz/11b Top/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.469 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0290 W/kg


SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00599 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0231 W/kg

Date: 2019/04/02

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

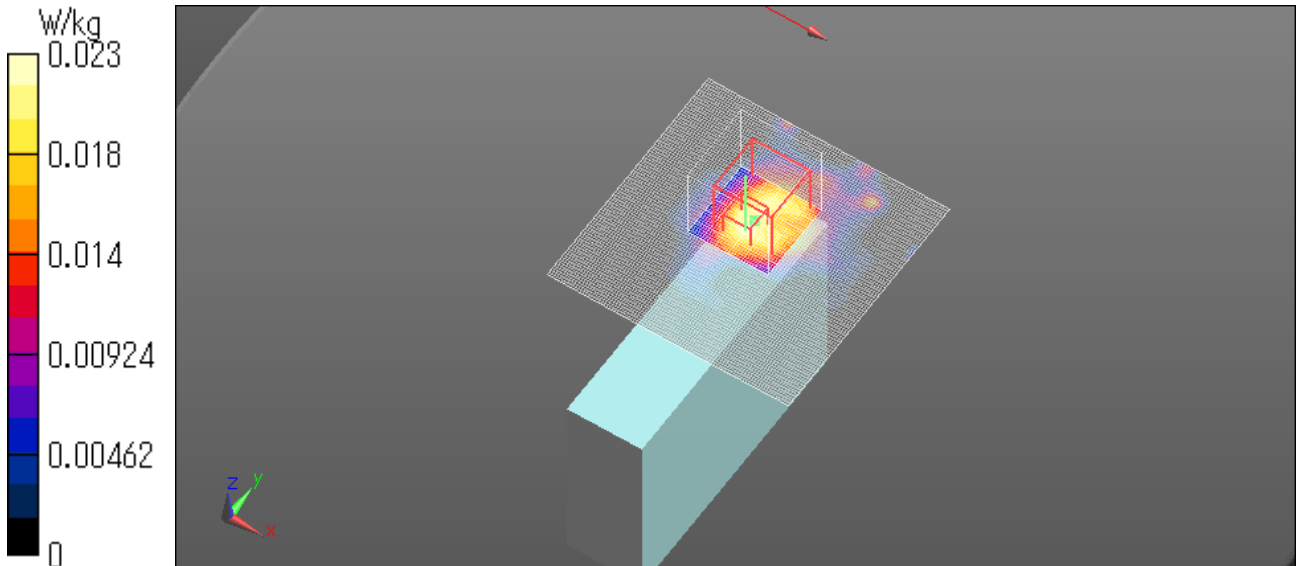

WLAN 2.4G 11b 1Mbps 2412MHz Left tilt2 0mm

Communication System: UID 0, #WLAN 11a/b/g/n (0); Communication System Band: 11b/g/n (2.4G); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.338$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(7.58, 7.58, 7.58) @ 2412 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 2.4GHz/11b Left tilt2/Area Scan (61x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.0983 W/kg

WLAN 2.4GHz/11b Left tilt2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.512 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.141 W/kg


SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.017 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.100 W/kg

Date: 2019/06/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

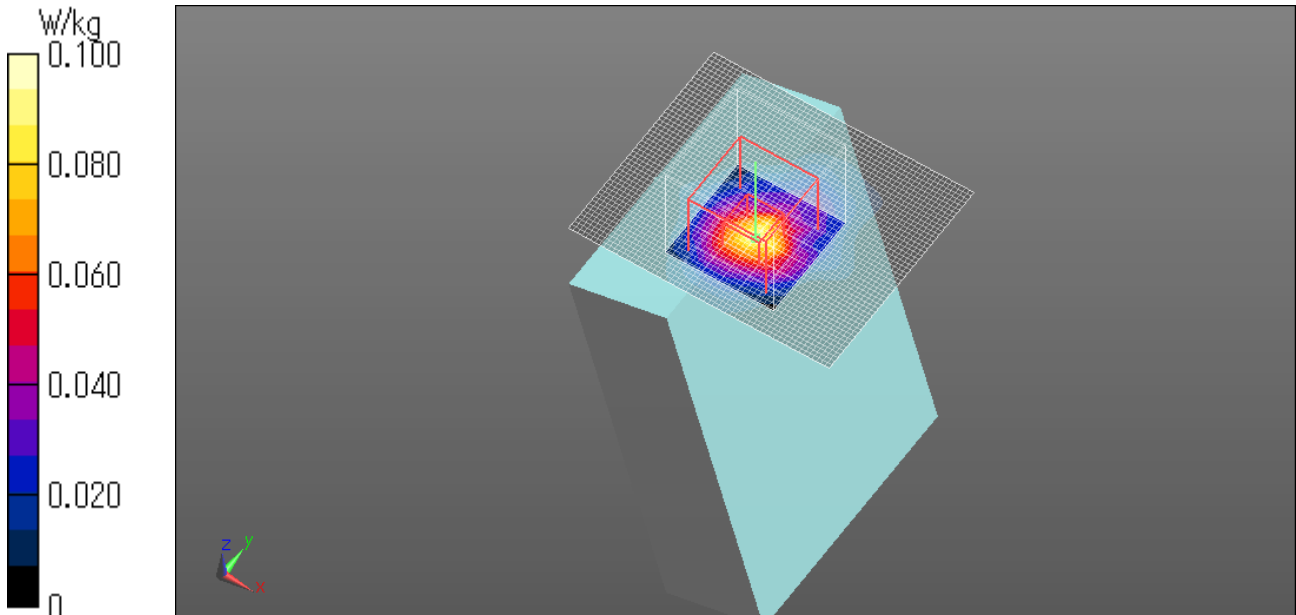

Measurement data WLAN 5.2GHz

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5190MHz Front 5mm

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.265$ S/m; $\epsilon_r = 47.32$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5190 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11n40 Front 5mm from antenna face/Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.957 W/kg

WLAN 5.2GHz/11n40 Front 5mm from antenna face/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.31 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.927 W/kg

Date: 2019/04/03

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

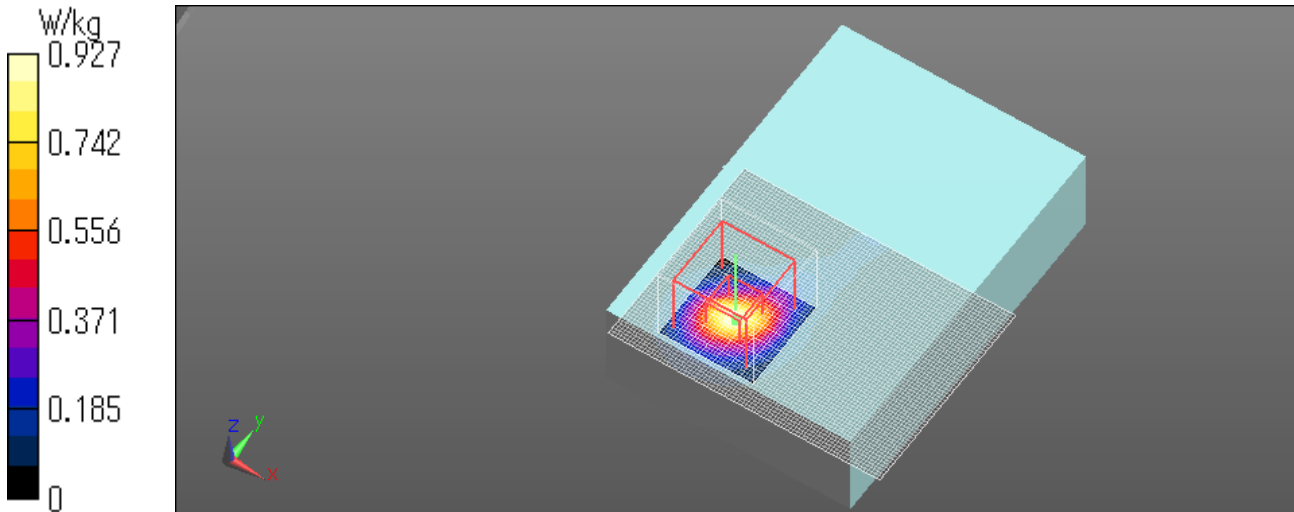

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5230MHz Front 5mm

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 5.336 \text{ S/m}$; $\epsilon_r = 47.224$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5230 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11n40 Front 5mm from antenna face other channel/Area Scan (81x61x1): Interpolated grid:
 $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.12 W/kg

WLAN 5.2GHz/11n40 Front 5mm from antenna face other channel/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 16.98 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

Date: 2019/04/03

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

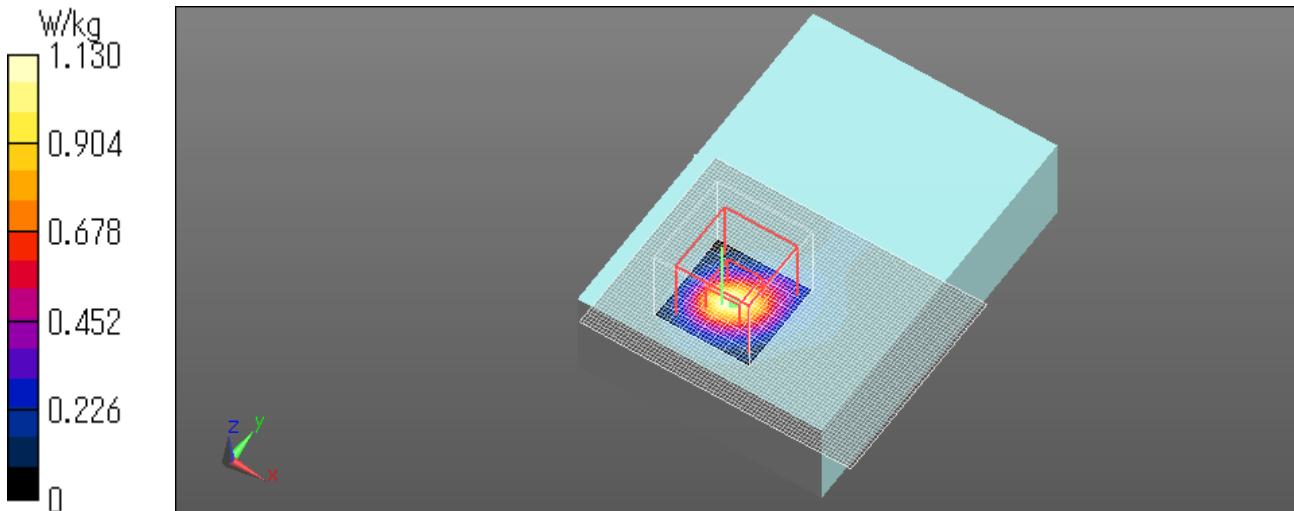

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5190MHz Front tilt 5mm

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.265 \text{ S/m}$; $\epsilon_r = 47.32$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5190 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11n40 Front tilt 5mm/Area Scan (81x61x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.788 W/kg

WLAN 5.2GHz/11n40 Front tilt 5mm/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 13.32 V/m ; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.308 W/kg ; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.720 W/kg

Date: 2019/04/03

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

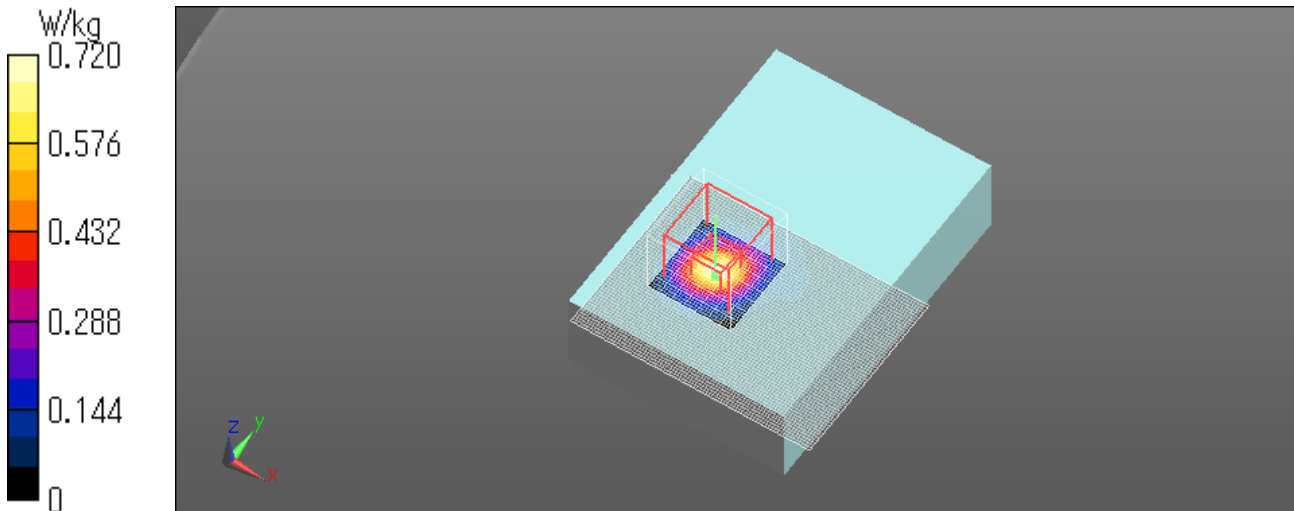

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5190MHz Left 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11a/n/ac; Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.265 \text{ S/m}$; $\epsilon_r = 47.32$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5190 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11a Left/Area Scan (101x61x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.302 W/kg

WLAN 5.2GHz/11a Left/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid:

$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 7.627 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

Date: 2019/04/03

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

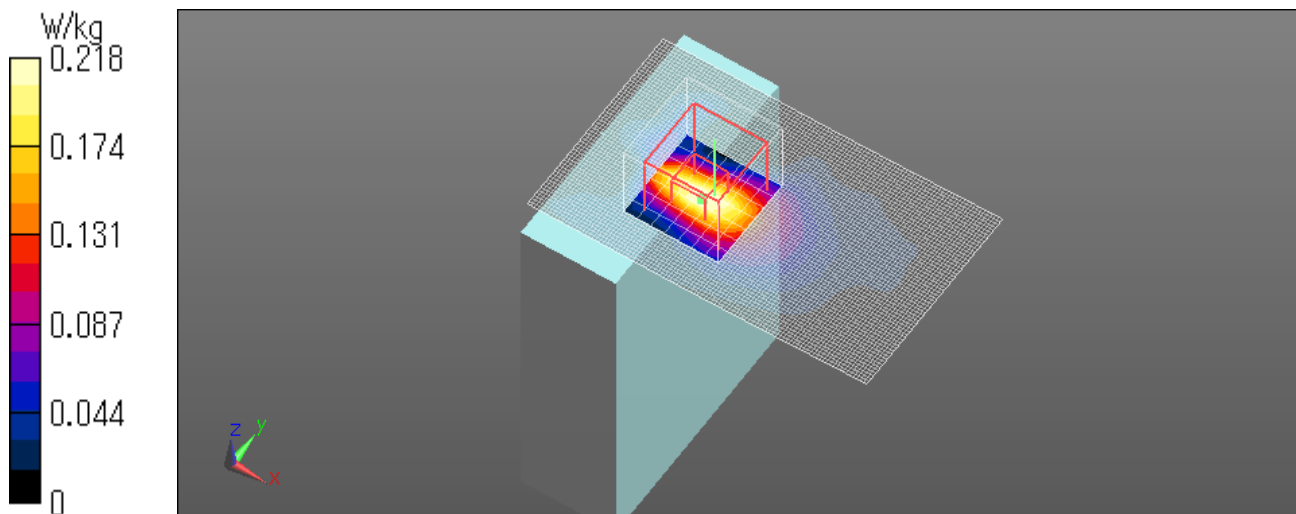

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5190MHz Left tilt 0mm

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.265 \text{ S/m}$; $\epsilon_r = 47.32$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5190 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11n40 Left tilt/Area Scan (61x61x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.685 W/kg

WLAN 5.2GHz/11n40 Left tilt/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 10.29 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.444 W/kg

Date: 2019/04/03

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

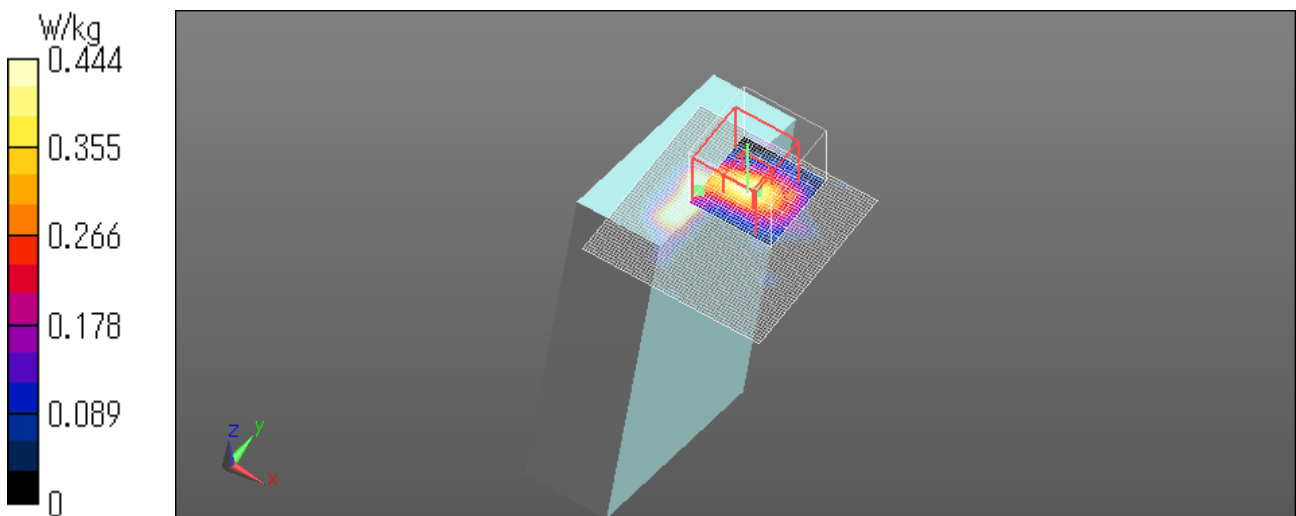

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5190MHz Top 0mm

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.265 \text{ S/m}$; $\epsilon_r = 47.32$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5190 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11n40 Top/Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.324 W/kg

WLAN 5.2GHz/11n40 Top/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid:

$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 9.204 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.369 W/kg

Date: 2019/04/03

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

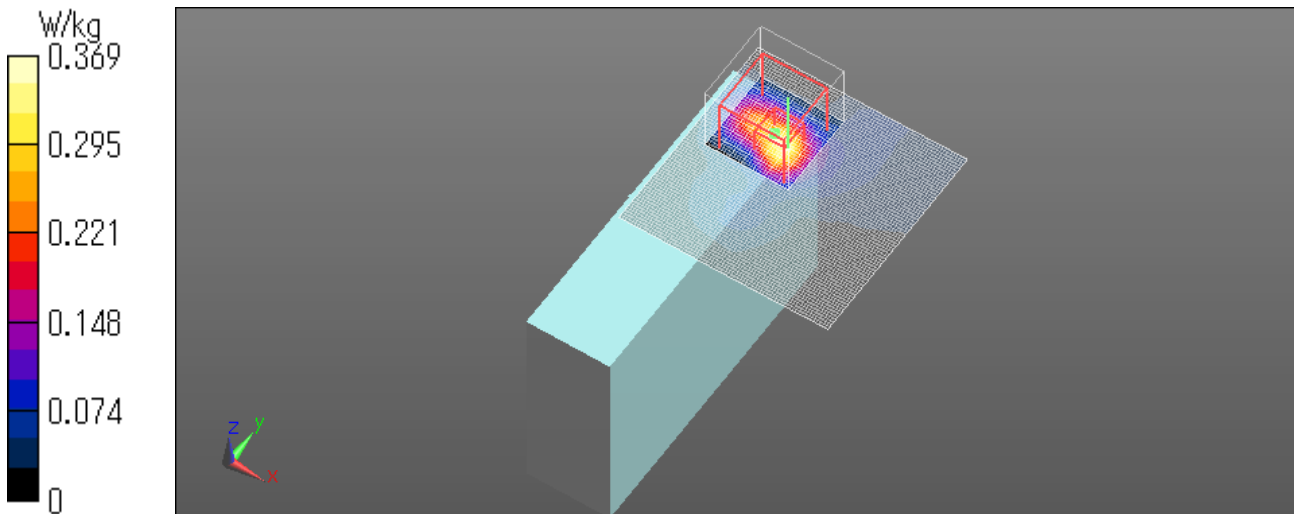

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5190MHz Left tilt2 0mm

Communication System: UID 0, WLAN (0); Communication System Band: 11a/n/ac; Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 46.991$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5190 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11n40 Left tilt2/Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

WLAN 5.2GHz/11n40 Left tilt2/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.04 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

Date: 2019/06/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

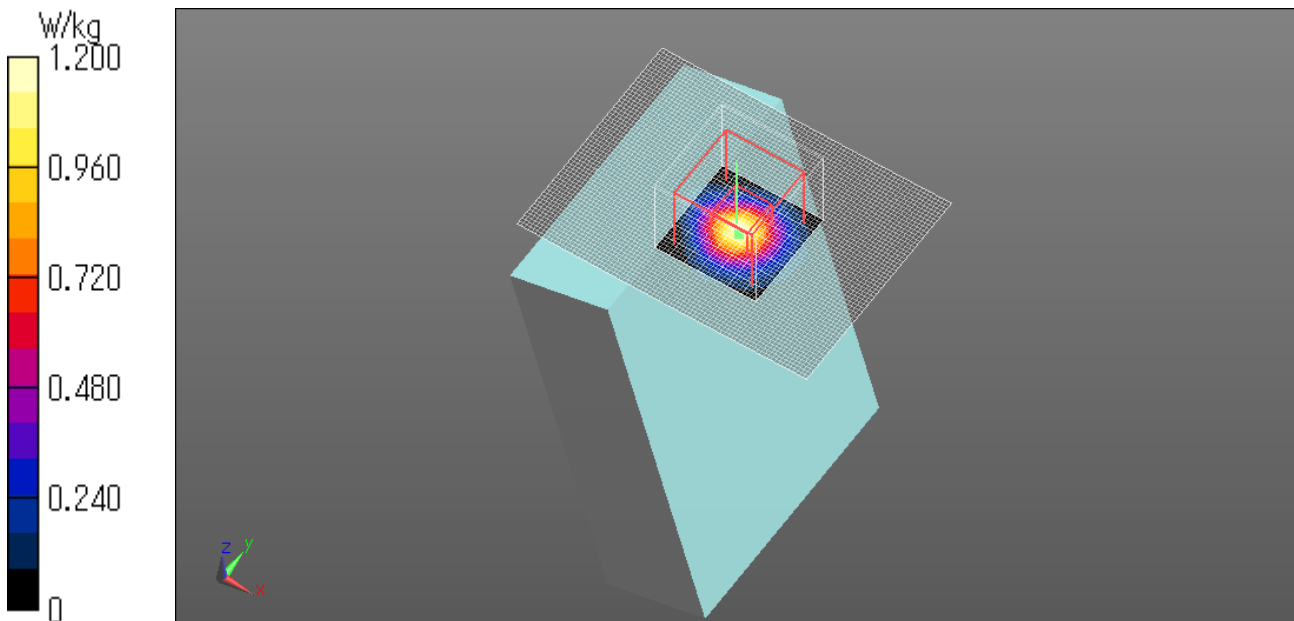

WLAN 5.2G 11n40 MCS0(13.5Mbps) 5230MHz Left tilt2 0mm

Communication System: UID 0, #WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.313$ S/m; $\epsilon_r = 46.827$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825 20181210; ConvF(4.37, 4.37, 4.37) @ 5230 MHz; Calibrated: 2018/12/10

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509_20180711; Calibrated: 2018/07/11

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

WLAN 5.2GHz/11n40 Left tilt2 other channel/Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

WLAN 5.2GHz/11n40 Left tilt2 other channel/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.90 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.966 W/kg


Date: 2019/06/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

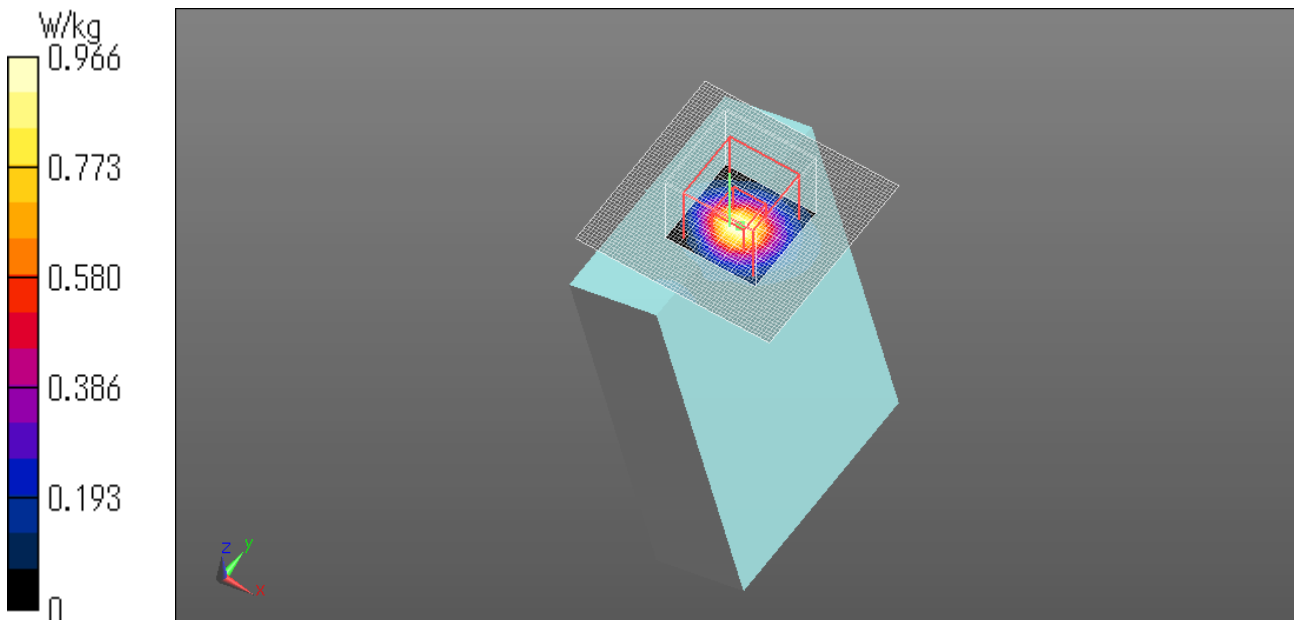

APPENDIX 3 : System specifications

Configuration and peripherals

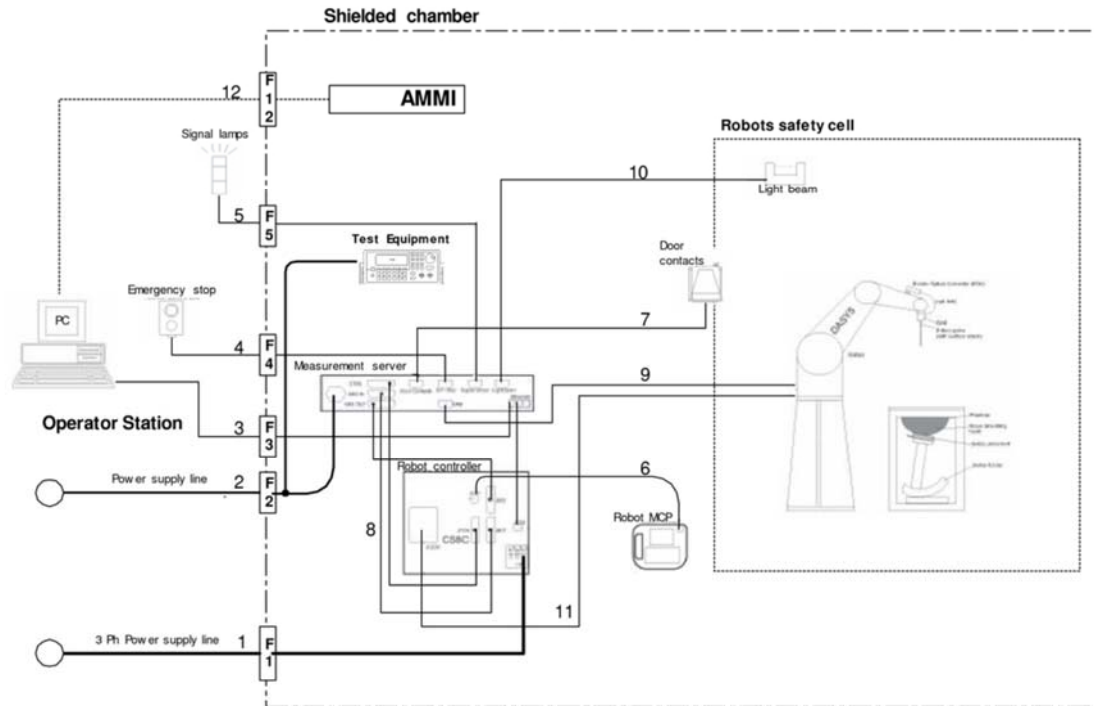

The DASYS5 system for performing compliance tests consist of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASYS5 software.
- Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Specifications

a)Robot TX60L

Number of Axes	:	6
Nominal Load	:	2 kg
Maximum Load	:	5kg
Reach	:	920mm
Repeatability	:	+/-0.03mm
Control Unit	:	CS8c
Programming Language	:	VAL3
Weight	:	52.2kg
Manufacture	:	Stäubli Robotics

b)E-Field Probe

Model	:	EX3DV4
Construction	:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)
Frequency	:	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	:	+/-0.3 dB in HSL (rotation around probe axis) +/-0.5 dB in tissue material (rotation normal probe axis)
Dynamic Range	:	10uW/g to > 100 mW/g;Linearity +/-0.2 dB(noise: typically < 1uW/g)
Dimensions	:	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	:	Highprecision dosimetric measurement in any exposure scenario (e.g., very strong gradient fields).Only probe which enables compliance testing for frequencies up to 6GHz with precision of better 30%.
Manufacture	:	Schmid & Partner Engineering AG



EX3DV4 E-field Probe

c)Data Acquisition Electronic (DAE4)

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY5 embedded system (fully remote controlled)
Measurement Range	:	Two step probe touch detector for mechanical surface detection and emergency robot stop
Input Offset voltage	:	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Resistance	:	< 5 μ V (with auto zero)
Input Bias Current	:	200 M Ω
Battery Power	:	< 50 fA
Dimension	:	> 10 h of operation (with two 9.6 V NiMH accus)
Manufacture	:	60 x 60 x 68 mm
	:	Schmid & Partner Engineering AG

d)Electro-Optic Converter (EOC)

Version	:	EOC 61
Description	:	for TX60 robot arm, including proximity sensor
Manufacture	:	Schmid & Partner Engineering AG

e)DASY5 Measurement server

Features	:	Intel ULV Celeron 400MHz 128MB chip disk and 128MB RAM 16 Bit A/D converter for surface detection system Vacuum Fluorescent Display Robot Interface Serial link to DAE (with watchdog supervision) Door contact port (Possibility to connect a light curtain) Emergency stop port (to connect the remote control) Signal lamps port Light beam port Three Ethernet connection ports Two USB 2.0 Ports Two serial links Expansion port for future applications
Dimensions (L x W x H)	:	440 x 241 x 89 mm
Manufacture	:	Schmid & Partner Engineering AG

f) Light Beam Switches

Version	:	LB5
Dimensions (L x H)	:	110 x 80 mm
Thickness	:	12 mm
Beam-length	:	80 mm
Manufacture	:	Schmid & Partner Engineering AG

g)Software

Item	:	Dosimetric Assessment System DASY5
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	DASY52, Version 52.6 (1)
Manufacture / Origin	:	Schmid & Partner Engineering AG

h)Robot Control Unit

Weight	:	70 Kg
AC Input Voltage	:	selectable
Manufacturer	:	Stäubli Robotics

i)Phantom and Device Holder

Phantom

Type	:	SAM Twin Phantom V4.0
Description	:	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
Material	:	Vinylester, glass fiber reinforced (VE-GF)
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Dimensions	:	Length: 1000 mm Width: 500 mm Height: adjustable feet
Volume	:	Approx. 25 liters
Manufacture	:	Schmid & Partner Engineering AG

Type	:	2mm Flat phantom ERI4.0
Description	:	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4.5 and higher and is compatible with all SPEAG dosimetric probes and dipoles.
Material	:	Vinylester, glass fiber reinforced (VE-GF)
Shell Thickness	:	2.0 ± 0.2 mm (sagging: <1%)
Filling Volume	:	approx. 30 liters
Dimensions	:	Major ellipse axis: 600 mm Minor axis: 400 mm
Manufacture	:	Schmid & Partner Engineering AG

Device Holder

In combination with the Twin SAM Phantom V4.0/V4.0c or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Material	:	POM
----------	---	-----

Laptio Extensions kit

Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM, ELI4 Phantoms.

Material	:	POM, Acrylic glass, Foam
----------	---	--------------------------

Urethane

For this measurement, the urethane foam was used as device holder.

j) Simulated Tissues (Liquid)

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Mixture (%)	Frequency (MHz)									
	450		900		1800		1950		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.91	46.21	40.29	50.75	55.24	70.17	55.41	69.79	55.0	68.64
Sugar	56.93	51.17	57.90	48.21	-	-	-	-	-	-
Cellulose	0.25	0.18	0.24	0.00	-	-	-	-	-	-
Salt (NaCl)	3.79	2.34	1.38	0.94	0.31	0.39	0.08	0.2	-	-
Preventol	0.12	0.08	0.18	0.10	-	-	-	-	-	-
DGMBE	-	-	-	-	44.45	29.44	44.51	30.0	45.0	31.37
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Note: DGMBE(Diethylenglycol-monobutyl ether)

The simulated tissue (liquid) of 1800MHz was used for the test frequency of 1700MHz to 1800MHz.

Mixture (%)	Frequency(MHz)	
	650&750	1450
Tissue Type	Head and Body	Head and Body
Water	35-58%	52-75%
Sugar	40-60%	-
Cellulose	<0.3%	-
Salt (NaCl)	0-6%	<1%
Preventol	0.1-0.7%	-
DGMBE	-	25-48%

Mixture (%)	Frequency(MHz)	
	5800	
Tissue Type	Head	Body
Water	64.0	78.0
Mineral Oil	18.0	11.0
Emulsifiers	15.0	9.0
Additives and salt	3.0	2.0

Product identifier

Trade name	Broad Band Tissue Simulation Liquid HBBL600-10000V6, MBBL600-6000V6, HU16B, MU16B
Manufacturer/Supplier	Schmid & Partner Engineering AG

Declarable components:

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	Ethandiol STOT RE 2, H373; Acute Tox. 4, H302	< 5.2%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	Sodium petroleum sulfonate Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	Alkoxylated alcohol, > C ₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

System Check Dipole SAR Calibration Certificate -Dipole 2450MHz(D2450V2,S/N:713)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **UL Japan (Vitec)**

Certificate No: **D2450V2-713_Sep16**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:713**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 13, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8461A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (In house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (In house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-713_Sep16

Page 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.88 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.6 $\pm$ 6 %	2.04 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.11 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.1 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.0 Ω + 2.3 j Ω
Return Loss	- 28.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.6 Ω + 3.7 j Ω
Return Loss	- 28.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.158 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 05, 2002

DASY5 Validation Report for Head TSL

Date: 13.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:713

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.5 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.23 W/kg

Maximum value of SAR (measured) = 21.9 W/kg

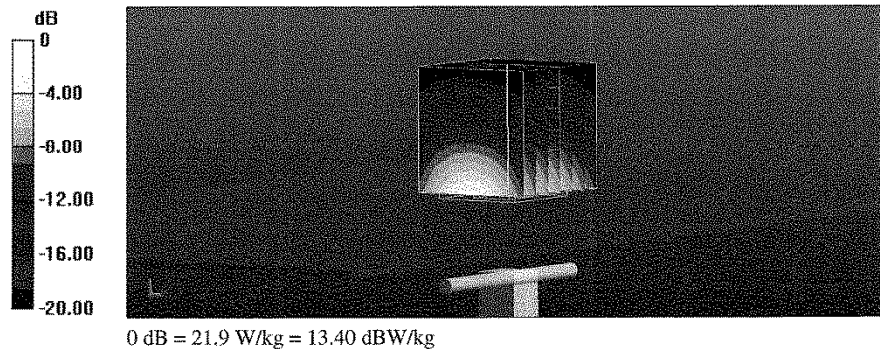

Impedance Measurement Plot for Head TSL

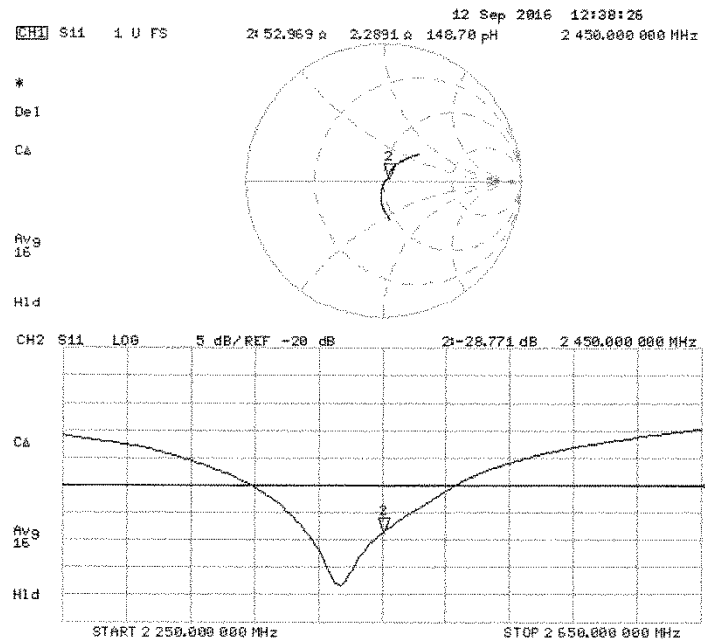

DASY5 Validation Report for Body TSL

Date: 13.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:713

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.4 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 25.5 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 21.2 W/kg

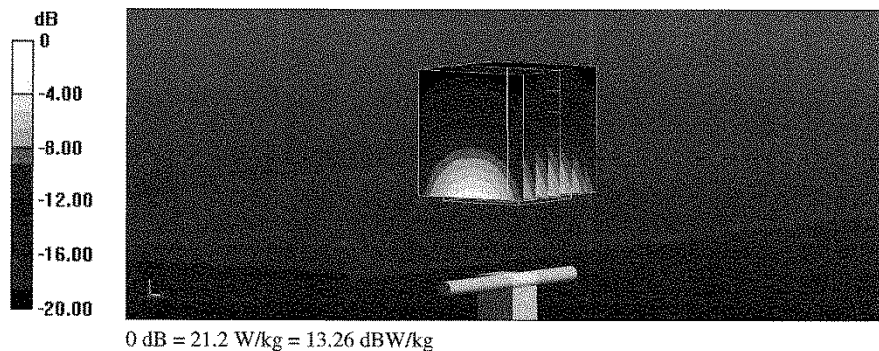

Impedance Measurement Plot for Body TSL

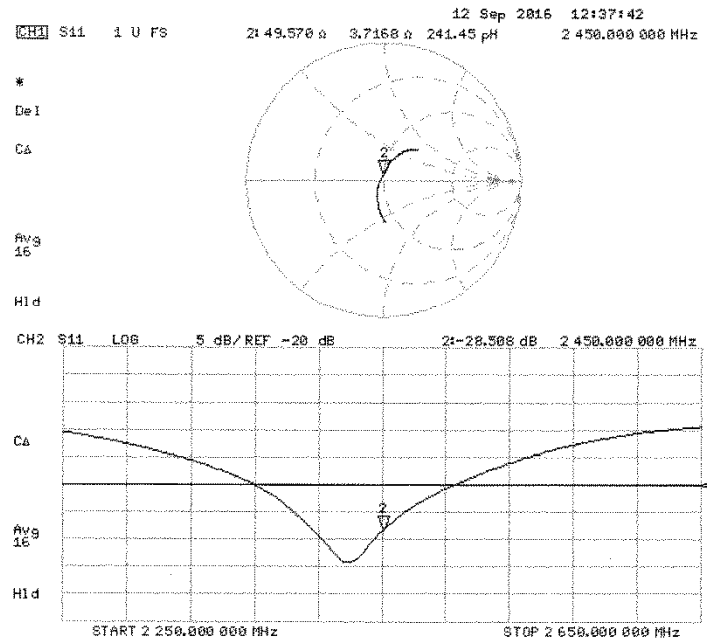

D2450V2 Calibration for Impedance and Return-loss

Equipment	Dipole Antenna	Model	D2450V2
Manufacture	Schmid&Partner Engineering AG	Serial	713
Tested by	Tomohisa Nakagawa		

1. Test environment

Date	September 12, 2017		
Ambient Temperature	23.0 deg.C	Relative humidity	64%RH
Date	September 20, 2018		
Ambient Temperature	24.0 deg.C	Relative humidity	57%RH

2. Equipment used

Calibration at September, 2017

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MOS-37	Digital thermometer	LKM electronic	DTM3000	-	SAR	2017/07/26 * 12
MPF-03	2mm Oval Flat Phantom	Schmid&Partner Engineering AG	QDOVA001BB	1203	SAR	2017/05/29 * 12
MMSL2450	Tissue simulation liquid (Body)	Schmid&Partner Engineering AG	MSL2450V2	SL AA 245 BA	SAR*Daily Check Target Value $\pm 5\%$	Pre Check
MHSL2450	Tissue simulation liquid (Head)	Schmid&Partner Engineering AG	HSL2450V2	SL AAH 245 BA	SAR*Daily Check Target Value $\pm 5\%$	Pre Check
EST-63	Network Analyzer	KEYSIGHT	E5071C	MY46523746	SAR	2017/02/03 * 12
EST-64	Calibration Kit	KEYSIGHT	85032F	MY53200995	SAR	2017/02/02 * 12
MDA-07	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	713	SAR	2016/09/13 * 12

Calibration at September, 2018

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MOS-37	Digital thermometer	LKM electronic	DTM3000	-	SAR	2018/07/30 * 12
MPF-03	2mm Oval Flat Phantom	Schmid&Partner Engineering AG	QDOVA001BB	1203	SAR	2018/05/08 * 12
MMSL2450	Tissue simulation liquid (Body)	Schmid&Partner Engineering AG	MSL2450V2	SL AA 245 BA	SAR*Daily Check Target Value $\pm 5\%$	Pre Check
MHSL2450	Tissue simulation liquid (Head)	Schmid&Partner Engineering AG	HSL2450V2	SL AAH 245 BA	SAR*Daily Check Target Value $\pm 5\%$	Pre Check
EST-30	Network Analyzer	Agilent	N5230A	MY46400314	SAR	2018/08/16 * 12
EST-57	2.4mm Calibration Kit	Agilent	85056A	MY44300225	SAR	2018/08/17 * 12
MDA-07	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	713	SAR	2016/09/13 * 24

3. Test Result

Impeadance,Transformed to feed point	cal day	Head (real part) [Ω]	Head (img part) [jΩ]	Deviation (real part) [Ω]	Deviation (img part) [jΩ]	Tolerance	Result
Calibration (SPEAG)	2016/9/13	53.00	2.30	-	-	-	-
Calibration(ULJ)	2017/9/12	52.38	3.79	-0.62	1.49	$\pm 5\Omega \pm 5j\Omega$	Complied
Calibration(ULJ)	2018/9/20	50.04	4.78	-2.34	0.99	$\pm 5\Omega \pm 5j\Omega$	Complied

Return loss	cal day	Head [dB]	Deviation [dB]	Tolerance [+/-dB]	Result
Calibration (SPEAG)	2016/9/13	-28.80	-	-	-
Calibration(ULJ)	2017/9/12	-25.08	3.72	5.76	Complied
Calibration(ULJ)	2018/9/20	-26.43	-1.35	5.02	Complied


Impeadance,Transformed to feed point	cal day	Body (real part) [Ω]	Body (img part) [jΩ]	Deviation (real part) [Ω]	Deviation (img part) [jΩ]	Tolerance	Result
Calibration (SPEAG)	2016/9/13	49.60	3.70	-	-	-	-
Calibration(ULJ)	2017/9/12	46.48	7.69	-3.12	3.99	$\pm 5\Omega \pm 5j\Omega$	Complied
Calibration(ULJ)	2018/9/20	48.69	5.98	2.21	-1.71	$\pm 5\Omega \pm 5j\Omega$	Complied

Return loss	cal day	Body [dB]	Deviation [dB]	Tolerance [+/-dB]	Result
Calibration (SPEAG)	2016/9/13	-28.50	-	-	-
Calibration(ULJ)	2017/9/12	-23.31	5.19	5.70	Complied
Calibration(ULJ)	2018/9/20	-24.16	-0.85	4.66	Complied


*Tolerance : According to the KDB865664D01

Measurement Plots


<Head Liquid> 2017

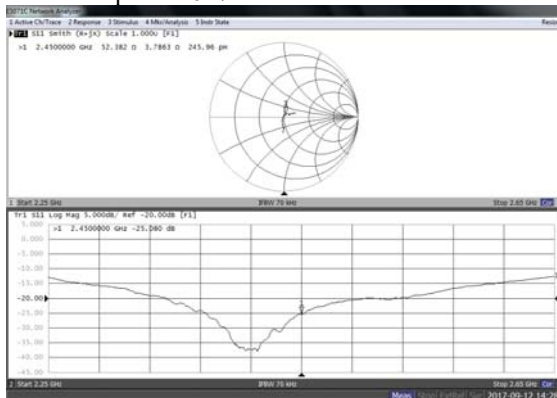


<Head Liquid> 2018

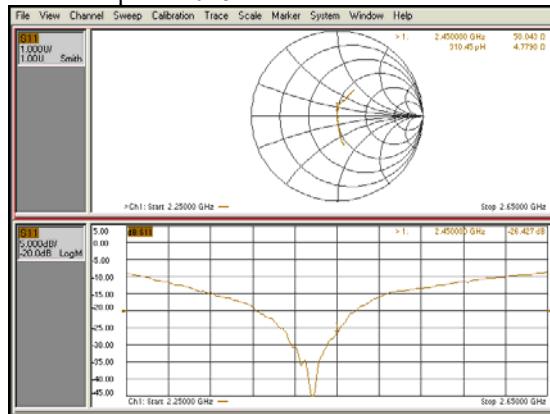

<Body Liquid> 2017

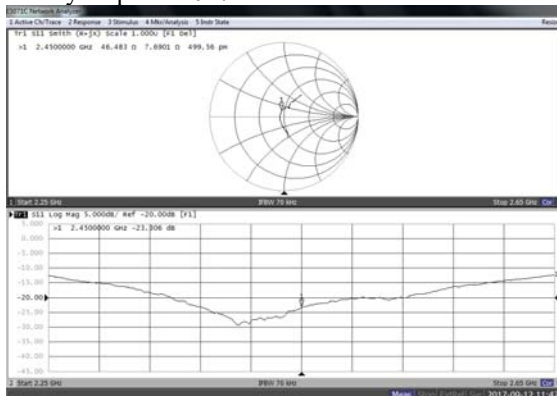

<Body Liquid> 2018

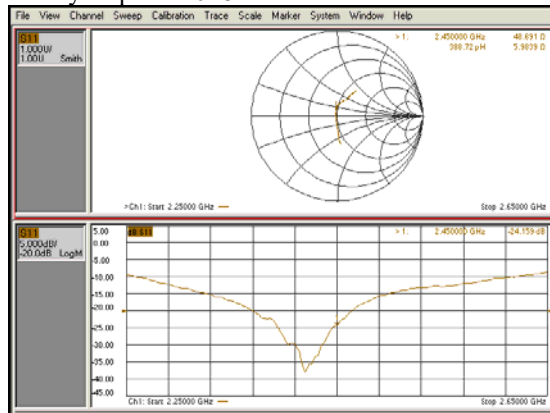

System Check Dipole SAR Calibration Certificate -DipoleD5GHz (D5GHzV2 S/N: 1020)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **UL (Vitec)**

Certificate No: **D5GHzV2-1020_Nov18**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1020**

Calibration procedure(s) **QA CAL-22.v3**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **November 09, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 3503	30-Dec-17 (No. EX3-3503_Dec17)	Dec-18
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: November 12, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D5GHzV2-1020_Nov18

Page 1 of 15

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.7 $\pm$ 6 %	4.58 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.0 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.7 ± 6 %	4.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.2 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.5 ± 6 %	5.01 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.9 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	5.07 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.08 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.5 ± 6 %	5.46 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	6.15 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.84 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.18 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	51.3 Ω - 6.3 j Ω
Return Loss	- 23.9 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	55.6 Ω - 0.1 j Ω
Return Loss	- 25.5 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	58.2 Ω + 2.0 j Ω
Return Loss	- 22.2 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.2 Ω + 1.9 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	51.4 Ω - 4.9 j Ω
Return Loss	- 26.0 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.8 Ω - 0.9 j Ω
Return Loss	- 25.1 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	59.0 Ω + 2.5 j Ω
Return Loss	- 21.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.201 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004

DASY5 Validation Report for Head TSL

Date: 08.11.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1020

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz,
Frequency: 5750 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.07$ S/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.51, 5.51, 5.51) @ 5250 MHz,
ConvF(5.05, 5.05, 5.05) @ 5600 MHz, ConvF(4.98, 4.98, 4.98) @ 5750 MHz,
ConvF(4.96, 4.96, 4.96) @ 5800 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 78.08 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 26.8 W/kg
SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.37 W/kg
Maximum value of SAR (measured) = 18.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 77.66 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 30.8 W/kg
SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.45 W/kg
Maximum value of SAR (measured) = 19.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 74.60 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 29.5 W/kg
SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.29 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.01 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 30.5 W/kg


SAR(1 g) = 8.08 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

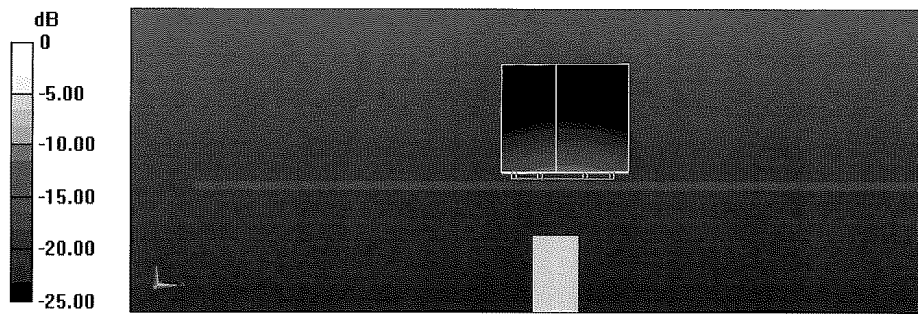

0 dB = 18.4 W/kg = 12.65 dBW/kg

Impedance Measurement Plot for Head TSL

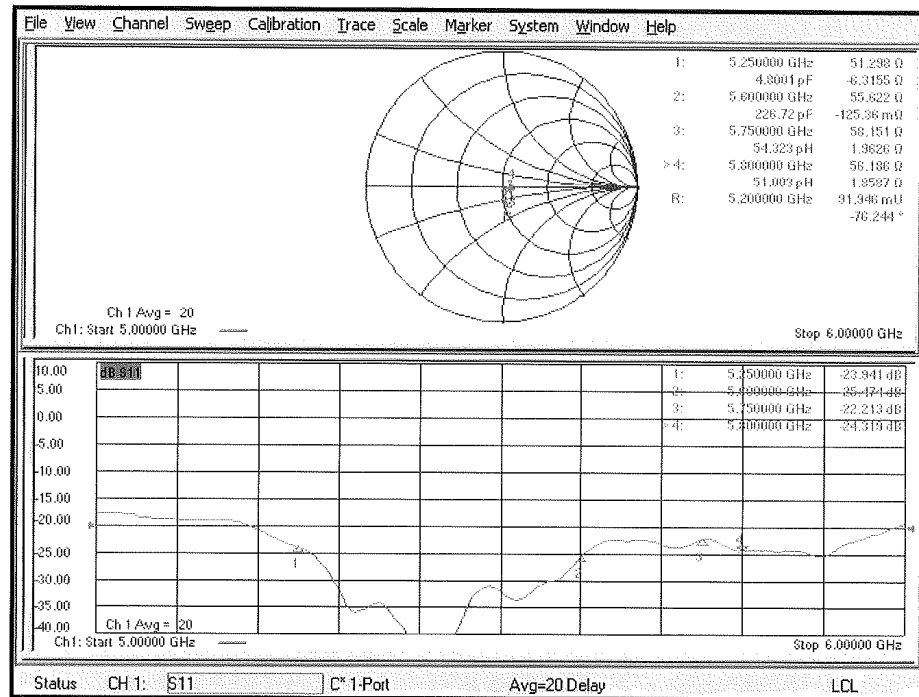

DASY5 Validation Report for Body TSL

Date: 09.11.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1020

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.46$ S/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.94$ S/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³,

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.26, 5.26, 5.26) @ 5250 MHz, ConvF(4.65, 4.65, 4.65) @ 5600 MHz, ConvF(4.57, 4.57, 4.57) @ 5750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.05 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.17 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 19.0 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.73 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

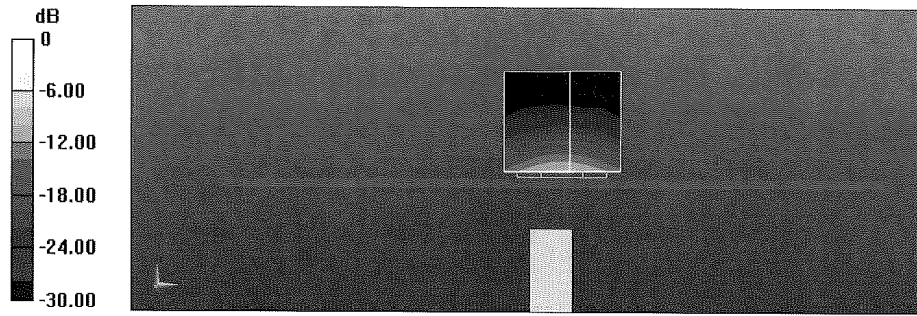

Impedance Measurement Plot for Body TSL

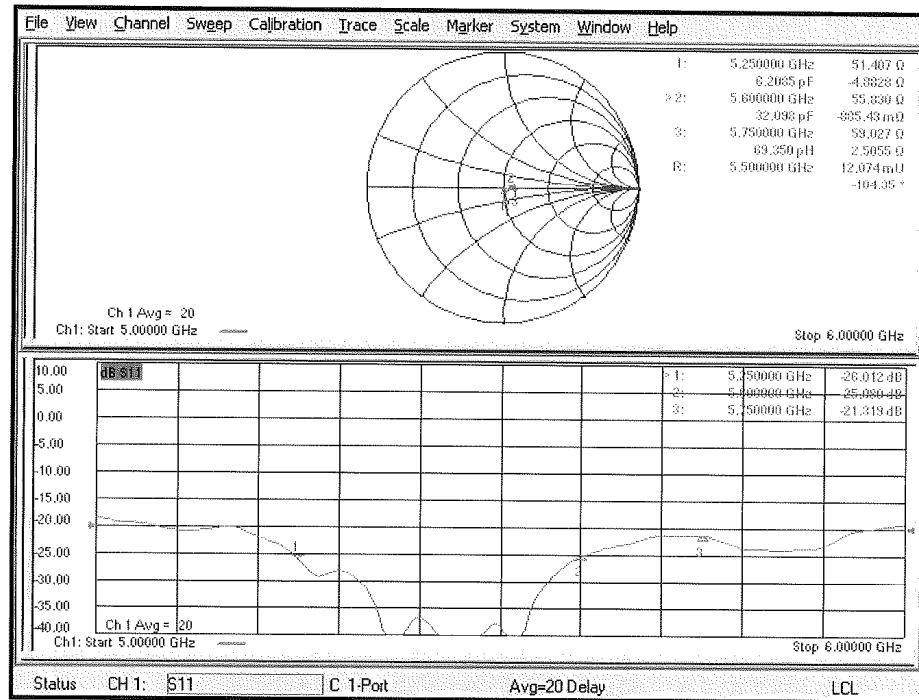

Dosimetric E-Field Probe Calibration Certificate (EX3DV4, S/N: 3825)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **UL Japan (Vitec)**

Certificate No: **EX3-3825_Dec18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3825**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **December 10, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

	Name	Function	Signature
Calibrated by:	Manu Seltz	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: December 10, 2018			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3825

December 10, 2018

Probe EX3DV4

SN:3825

Manufactured: September 6, 2011
Calibrated: December 10, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3825

December 10, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3825

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.43	0.38	0.42	$\pm 10.1 \%$
DCP (mV) ^B	103.5	102.3	100.9	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	144.2	$\pm 2.7 \%$
		Y	0.0	0.0	1.0		142.8	
		Z	0.0	0.0	1.0		147.7	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $\text{ms}\cdot\text{V}^{-2}$	T2 $\text{ms}\cdot\text{V}^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	40.52	310.6	37.16	10.20	0.842	5.046	0.000	0.525	1.009
Y	35.08	252.8	33.51	9.918	0.706	4.989	1.708	0.115	1.004
Z	46.05	353.7	37.28	13.65	0.858	5.079	0.000	0.541	1.012

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4-- SN:3825

December 10, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3825

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.09	10.09	10.09	0.42	0.94	± 12.0 %
835	41.5	0.90	9.69	9.69	9.69	0.44	0.87	± 12.0 %
1450	40.5	1.20	8.58	8.58	8.58	0.37	0.85	± 12.0 %
1750	40.1	1.37	8.43	8.43	8.43	0.34	0.87	± 12.0 %
1900	40.0	1.40	8.14	8.14	8.14	0.34	0.84	± 12.0 %
1950	40.0	1.40	7.81	7.81	7.81	0.34	0.85	± 12.0 %
2450	39.2	1.80	7.33	7.33	7.33	0.37	0.95	± 12.0 %
3500	37.9	2.91	6.98	6.98	6.98	0.25	1.20	± 13.1 %
5250	35.9	4.71	5.02	5.02	5.02	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.56	4.56	4.56	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.85	4.85	4.85	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 60 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4-- SN:3825

December 10, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3825

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	9.91	9.91	9.91	0.47	0.80	± 12.0 %
835	55.2	0.97	9.62	9.62	9.62	0.47	0.80	± 12.0 %
1450	54.0	1.30	8.33	8.33	8.33	0.33	0.86	± 12.0 %
1750	53.4	1.49	8.19	8.19	8.19	0.31	0.80	± 12.0 %
1900	53.3	1.52	7.90	7.90	7.90	0.34	0.90	± 12.0 %
2450	52.7	1.95	7.58	7.58	7.58	0.34	0.96	± 12.0 %
3500	51.3	3.31	6.57	6.57	6.57	0.25	1.20	± 13.1 %
5250	48.9	5.36	4.37	4.37	4.37	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.84	3.84	3.84	0.50	1.90	± 13.1 %
5750	48.3	5.94	4.11	4.11	4.11	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3825

December 10, 2018

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

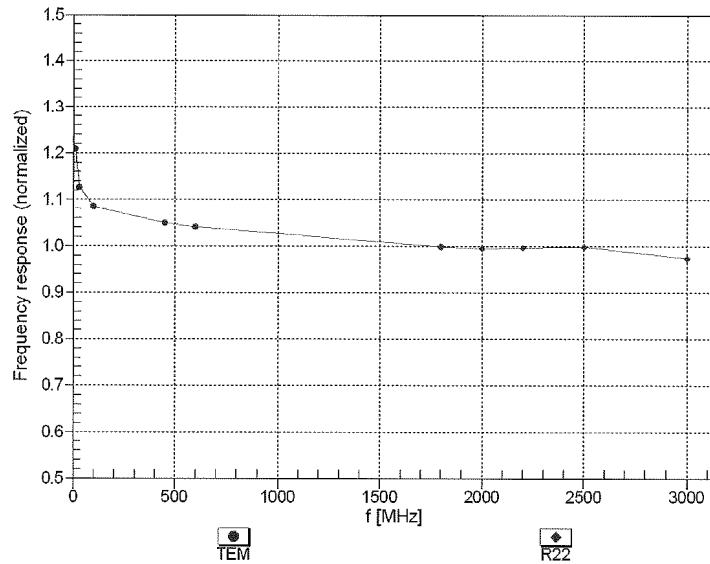


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:3825

December 10, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

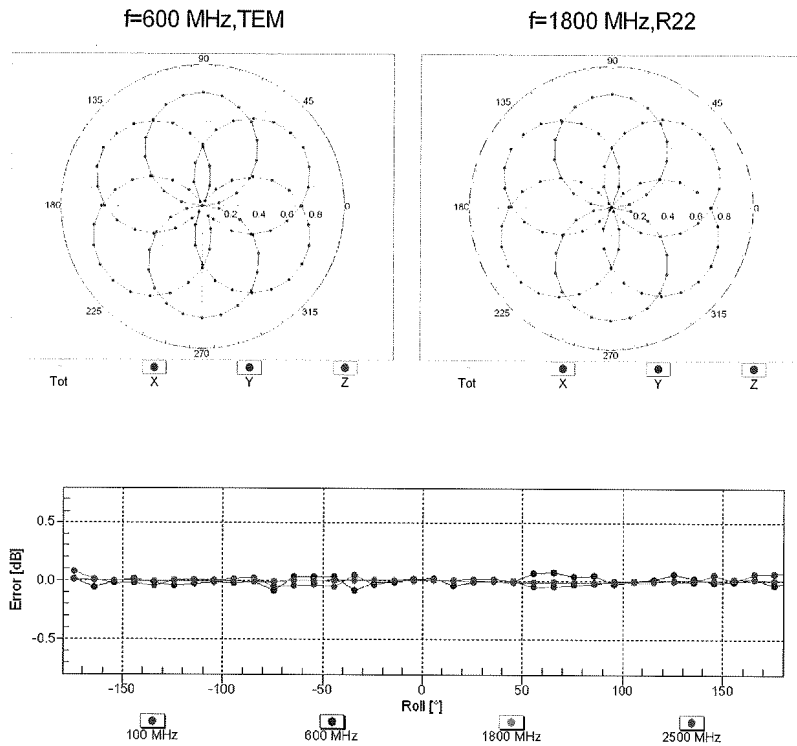


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:3825

December 10, 2018

Dynamic Range f(SAR_{head})
(TEM cell , f_{eval}= 1900 MHz)

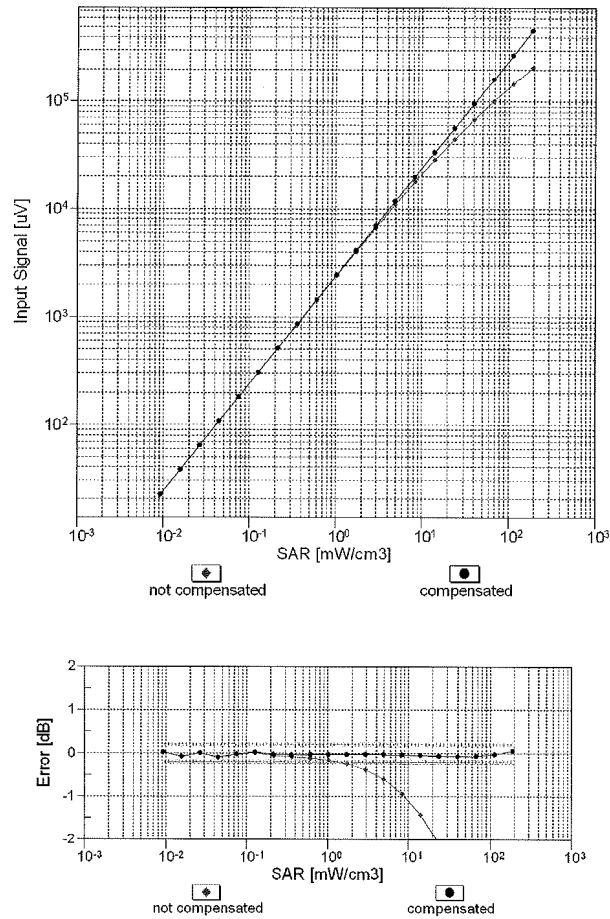


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)


EX3DV4- SN:3825

December 10, 2018

Conversion Factor Assessment

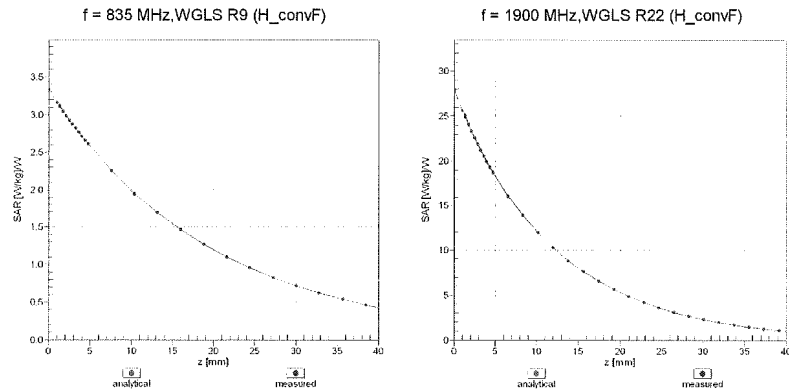

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

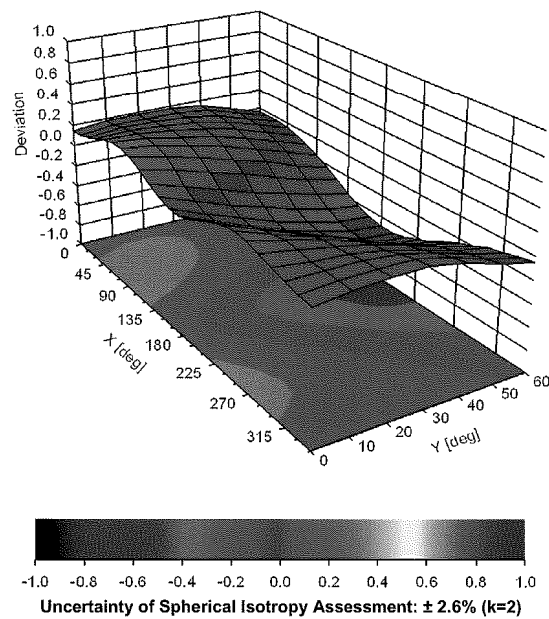

EX3DV4- SN:3825

December 10, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3825

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-24.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:3825

December 10, 2018

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dBμV	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	144.2	± 2.7 %
		Y	0.00	0.00	1.00		142.8	
		Z	0.00	0.00	1.00		147.7	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.04	63.75	9.06	10.00	20.0	± 9.6 %
		Y	2.37	65.53	10.14		20.0	
		Z	2.63	66.86	11.10		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	0.79	64.73	12.92	0.00	150.0	± 9.6 %
		Y	1.01	68.14	15.56		150.0	
		Z	0.83	64.58	13.04		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.02	62.68	14.09	0.41	150.0	± 9.6 %
		Y	1.15	64.07	15.17		150.0	
		Z	1.07	62.77	14.22		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.67	66.41	16.80	1.46	150.0	± 9.6 %
		Y	4.65	66.78	16.83		150.0	
		Z	4.79	66.45	16.92		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	31.71	96.38	22.12	9.39	50.0	± 9.6 %
		Y	39.90	99.13	22.82		50.0	
		Z	100.00	114.68	27.90		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	15.35	87.58	19.67	9.57	50.0	± 9.6 %
		Y	17.78	89.34	20.16		50.0	
		Z	100.00	114.38	27.82		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	106.44	22.71	6.56	60.0	± 9.6 %
		Y	100.00	107.89	23.40		60.0	
		Z	100.00	112.29	25.70		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	3.71	65.99	23.07	12.57	50.0	± 9.6 %
		Y	4.85	73.97	27.29		50.0	
		Z	3.88	66.81	23.83		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	7.73	87.44	30.45	9.56	60.0	± 9.6 %
		Y	7.57	87.12	30.26		60.0	
		Z	9.04	90.79	31.98		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	104.01	20.85	4.80	80.0	± 9.6 %
		Y	100.00	107.99	22.69		80.0	
		Z	100.00	111.10	24.36		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	101.26	19.00	3.55	100.0	± 9.6 %
		Y	100.00	109.48	22.68		100.0	
		Z	100.00	110.03	23.18		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	5.08	78.58	25.84	7.80	80.0	± 9.6 %
		Y	4.96	78.04	25.50		80.0	
		Z	5.92	81.39	27.18		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	30.75	92.94	18.53	5.30	70.0	± 9.6 %
		Y	100.00	105.84	22.00		70.0	
		Z	100.00	109.97	24.16		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	0.30	60.00	4.62	1.88	100.0	± 9.6 %
		Y	100.00	107.49	20.62		100.0	
		Z	100.00	100.02	17.68		100.0	

EX3DV4- SN:3825

December 10, 2018

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	0.22	60.00	3.09	1.17	100.0	± 9.6 %
		Y	100.00	115.57	23.01		100.0	
		Z	0.32	62.16	5.85		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	6.13	82.56	20.19	5.30	70.0	± 9.6 %
		Y	5.41	80.34	19.10		70.0	
		Z	14.54	96.81	25.81		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	1.73	69.20	13.41	1.88	100.0	± 9.6 %
		Y	2.25	72.54	14.86		100.0	
		Z	2.59	74.41	16.52		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.23	66.48	11.87	1.17	100.0	± 9.6 %
		Y	1.71	70.60	13.92		100.0	
		Z	1.64	69.62	14.19		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	7.88	86.31	21.51	5.30	70.0	± 9.6 %
		Y	6.56	83.22	20.16		70.0	
		Z	23.19	104.23	27.97		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	1.63	68.63	13.14	1.88	100.0	± 9.6 %
		Y	2.04	71.48	14.43		100.0	
		Z	2.42	73.63	16.18		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.24	66.75	12.11	1.17	100.0	± 9.6 %
		Y	1.72	70.92	14.18		100.0	
		Z	1.65	69.96	14.45		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	0.96	64.73	10.60	0.00	150.0	± 9.6 %
		Y	1.68	72.23	14.55		150.0	
		Z	1.18	66.33	12.16		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	5.50	75.74	14.41	7.78	50.0	± 9.6 %
		Y	23.31	91.22	19.31		50.0	
		Z	100.00	109.59	24.73		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.26	124.74	10.73	0.00	150.0	± 9.6 %
		Y	0.00	100.77	3.15		150.0	
		Z	0.10	121.57	8.31		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	7.08	74.87	16.86	13.80	25.0	± 9.6 %
		Y	7.23	75.09	16.79		25.0	
		Z	45.65	102.68	26.31		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	7.29	77.55	16.65	10.79	40.0	± 9.6 %
		Y	7.98	78.66	16.98		40.0	
		Z	98.53	113.74	27.94		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	10.65	85.72	21.67	9.03	50.0	± 9.6 %
		Y	9.99	84.48	20.95		50.0	
		Z	22.20	99.03	26.87		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	4.01	74.30	23.28	6.55	100.0	± 9.6 %
		Y	3.95	73.91	23.01		100.0	
		Z	4.59	76.56	24.40		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.05	63.61	14.59	0.61	110.0	± 9.6 %
		Y	1.17	64.95	15.61		110.0	
		Z	1.11	63.86	14.84		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	3.79	87.09	21.04	1.30	110.0	± 9.6 %
		Y	6.03	95.93	25.06		110.0	
		Z	6.46	94.37	23.81		110.0	

EX3DV4- SN:3825

December 10, 2018

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	2.20	76.12	19.76	2.04	110.0	± 9.6 %
		Y	2.26	76.40	20.11		110.0	
		Z	2.82	79.52	21.44		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.45	66.33	16.19	0.49	100.0	± 9.6 %
		Y	4.46	66.82	16.35		100.0	
		Z	4.57	66.34	16.27		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.47	66.43	16.29	0.72	100.0	± 9.6 %
		Y	4.47	66.89	16.42		100.0	
		Z	4.59	66.45	16.38		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.73	66.67	16.52	0.86	100.0	± 9.6 %
		Y	4.71	67.06	16.59		100.0	
		Z	4.88	66.74	16.64		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.61	66.56	16.60	1.21	100.0	± 9.6 %
		Y	4.58	66.90	16.65		100.0	
		Z	4.75	66.65	16.75		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.63	66.58	16.77	1.46	100.0	± 9.6 %
		Y	4.59	66.88	16.77		100.0	
		Z	4.78	66.70	16.93		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.93	66.85	17.26	2.04	100.0	± 9.6 %
		Y	4.87	67.11	17.21		100.0	
		Z	5.08	66.93	17.42		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	4.97	66.83	17.45	2.55	100.0	± 9.6 %
		Y	4.90	67.01	17.34		100.0	
		Z	5.14	67.00	17.66		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.05	66.87	17.65	2.67	100.0	± 9.6 %
		Y	4.97	67.04	17.53		100.0	
		Z	5.22	67.01	17.86		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.77	66.51	17.10	1.99	100.0	± 9.6 %
		Y	4.74	66.81	17.09		100.0	
		Z	4.90	66.57	17.25		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.74	66.79	17.30	2.30	100.0	± 9.6 %
		Y	4.70	67.05	17.25		100.0	
		Z	4.88	66.91	17.48		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.81	66.98	17.63	2.83	100.0	± 9.6 %
		Y	4.76	67.21	17.55		100.0	
		Z	4.96	67.11	17.83		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.81	66.92	17.79	3.30	100.0	± 9.6 %
		Y	4.77	67.17	17.70		100.0	
		Z	4.95	67.04	18.00		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.84	66.99	18.07	3.82	90.0	± 9.6 %
		Y	4.80	67.19	17.94		90.0	
		Z	5.00	67.19	18.34		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.88	66.86	18.23	4.15	90.0	± 9.6 %
		Y	4.84	67.08	18.10		90.0	
		Z	5.02	66.99	18.46		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.91	66.95	18.33	4.30	90.0	± 9.6 %
		Y	4.88	67.18	18.21		90.0	
		Z	5.05	67.07	18.56		90.0	

Certificate No: EX3-3825_Dec18

Page 14 of 39

EX3DV4- SN:3825

December 10, 2018

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.48	61.16	7.92	0.00	150.0	± 9.6 %
		Y	0.71	65.60	11.20		150.0	
		Z	0.60	62.37	9.48		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	1.28	62.35	4.87	4.77	80.0	± 9.6 %
		Y	0.70	60.00	4.36		80.0	
		Z	0.78	60.00	4.63		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	106.55	22.78	6.56	60.0	± 9.6 %
		Y	100.00	107.90	23.42		60.0	
		Z	100.00	112.39	25.76		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.57	66.15	14.21	0.00	150.0	± 9.6 %
		Y	1.85	69.06	15.98		150.0	
		Z	1.61	65.89	14.30		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.53	66.08	14.16	0.00	150.0	± 9.6 %
		Y	1.81	69.00	15.95		150.0	
		Z	1.57	65.82	14.25		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	7.78	87.55	30.49	9.56	60.0	± 9.6 %
		Y	7.61	87.22	30.29		60.0	
		Z	9.10	90.91	32.02		60.0	
10100-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	2.74	68.66	15.64	0.00	150.0	± 9.6 %
		Y	3.01	70.63	16.89		150.0	
		Z	2.82	68.62	15.62		150.0	
10101-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	2.98	66.59	15.25	0.00	150.0	± 9.6 %
		Y	3.10	67.67	15.94		150.0	
		Z	3.06	66.60	15.28		150.0	
10102-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.09	66.64	15.40	0.00	150.0	± 9.6 %
		Y	3.21	67.68	16.05		150.0	
		Z	3.17	66.63	15.41		150.0	
10103-CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	5.58	74.08	19.62	3.98	65.0	± 9.6 %
		Y	5.64	74.43	19.63		65.0	
		Z	6.30	75.68	20.44		65.0	
10104-CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	5.63	72.20	19.59	3.98	65.0	± 9.6 %
		Y	5.66	72.45	19.50		65.0	
		Z	6.15	73.35	20.25		65.0	
10105-CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.37	71.14	19.43	3.98	65.0	± 9.6 %
		Y	5.41	71.43	19.35		65.0	
		Z	5.90	72.41	20.14		65.0	
10108-CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.37	67.96	15.44	0.00	150.0	± 9.6 %
		Y	2.59	69.93	16.72		150.0	
		Z	2.45	67.89	15.42		150.0	
10109-CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.62	66.39	15.04	0.00	150.0	± 9.6 %
		Y	2.76	67.69	15.85		150.0	
		Z	2.71	66.36	15.09		150.0	
10110-CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	1.87	66.97	14.80	0.00	150.0	± 9.6 %
		Y	2.08	69.19	16.25		150.0	
		Z	1.96	66.90	14.88		150.0	
10111-CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.30	67.07	15.05	0.00	150.0	± 9.6 %
		Y	2.54	69.22	16.27		150.0	
		Z	2.39	66.91	15.15		150.0	

EX3DV4-- SN:3825

December 10, 2018

10112-CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.75	66.48	15.15	0.00	150.0	± 9.6 %
		Y	2.88	67.76	15.93		150.0	
		Z	2.84	66.43	15.20		150.0	
10113-CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.46	67.32	15.25	0.00	150.0	± 9.6 %
		Y	2.69	69.40	16.41		150.0	
		Z	2.54	67.14	15.35		150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	4.91	66.80	16.16	0.00	150.0	± 9.6 %
		Y	4.92	67.25	16.37		150.0	
		Z	5.02	66.84	16.19		150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.17	66.89	16.22	0.00	150.0	± 9.6 %
		Y	5.16	67.30	16.39		150.0	
		Z	5.30	66.96	16.27		150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.00	66.99	16.19	0.00	150.0	± 9.6 %
		Y	5.00	67.44	16.39		150.0	
		Z	5.11	67.01	16.20		150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.89	66.70	16.13	0.00	150.0	± 9.6 %
		Y	4.92	67.21	16.37		150.0	
		Z	4.98	66.67	16.12		150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.25	67.10	16.34	0.00	150.0	± 9.6 %
		Y	5.22	67.45	16.47		150.0	
		Z	5.39	67.19	16.39		150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	4.99	66.96	16.18	0.00	150.0	± 9.6 %
		Y	5.00	67.43	16.39		150.0	
		Z	5.09	66.97	16.20		150.0	
10140-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.11	66.64	15.30	0.00	150.0	± 9.6 %
		Y	3.23	67.69	15.96		150.0	
		Z	3.20	66.63	15.33		150.0	
10141-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.24	66.81	15.52	0.00	150.0	± 9.6 %
		Y	3.36	67.87	16.16		150.0	
		Z	3.33	66.78	15.54		150.0	
10142-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.61	66.53	13.98	0.00	150.0	± 9.6 %
		Y	1.87	69.38	15.73		150.0	
		Z	1.71	66.56	14.26		150.0	
10143-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.05	67.01	14.06	0.00	150.0	± 9.6 %
		Y	2.41	70.10	15.69		150.0	
		Z	2.17	67.09	14.48		150.0	
10144-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.85	64.81	12.43	0.00	150.0	± 9.6 %
		Y	2.00	66.52	13.39		150.0	
		Z	2.00	65.13	13.00		150.0	
10145-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.75	60.79	7.70	0.00	150.0	± 9.6 %
		Y	0.83	62.31	8.79		150.0	
		Z	0.94	62.25	9.41		150.0	
10146-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.19	61.63	8.01	0.00	150.0	± 9.6 %
		Y	1.07	61.15	7.07		150.0	
		Z	1.67	64.74	10.69		150.0	
10147-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.26	62.19	8.43	0.00	150.0	± 9.6 %
		Y	1.14	61.63	7.42		150.0	
		Z	1.91	66.34	11.62		150.0	

Certificate No: EX3-3825_Dec18

Page 16 of 39

EX3DV4- SN:3825

December 10, 2018

10149-CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.63	66.45	15.09	0.00	150.0	± 9.6 %
		Y	2.77	67.76	15.90		150.0	
		Z	2.72	66.42	15.14		150.0	
10150-CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.75	66.54	15.20	0.00	150.0	± 9.6 %
		Y	2.89	67.83	15.98		150.0	
		Z	2.84	66.48	15.24		150.0	
10151-CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	5.80	76.40	20.59	3.98	65.0	± 9.6 %
		Y	5.90	76.83	20.60		65.0	
		Z	6.57	78.01	21.44		65.0	
10152-CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	5.14	72.01	19.11	3.98	65.0	± 9.6 %
		Y	5.16	72.24	18.97		65.0	
		Z	5.68	73.27	19.89		65.0	
10153-CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	5.53	73.17	20.02	3.98	65.0	± 9.6 %
		Y	5.57	73.44	19.88		65.0	
		Z	6.08	74.36	20.75		65.0	
10154-CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	1.91	67.33	15.04	0.00	150.0	± 9.6 %
		Y	2.13	69.65	16.52		150.0	
		Z	2.00	67.25	15.11		150.0	
10155-CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.31	67.09	15.07	0.00	150.0	± 9.6 %
		Y	2.55	69.26	16.30		150.0	
		Z	2.39	66.92	15.17		150.0	
10156-CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.41	66.06	13.31	0.00	150.0	± 9.6 %
		Y	1.70	69.34	15.29		150.0	
		Z	1.54	66.29	13.80		150.0	
10157-CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.63	64.74	11.97	0.00	150.0	± 9.6 %
		Y	1.83	66.93	13.21		150.0	
		Z	1.79	65.26	12.74		150.0	
10158-CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.46	67.39	15.30	0.00	150.0	± 9.6 %
		Y	2.70	69.50	16.48		150.0	
		Z	2.55	67.20	15.39		150.0	
10159-CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.70	65.05	12.19	0.00	150.0	± 9.6 %
		Y	1.93	67.39	13.48		150.0	
		Z	1.88	65.63	12.99		150.0	
10160-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.45	67.54	15.41	0.00	150.0	± 9.6 %
		Y	2.60	69.08	16.43		150.0	
		Z	2.52	67.39	15.40		150.0	
10161-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.64	66.46	15.06	0.00	150.0	± 9.6 %
		Y	2.79	67.83	15.88		150.0	
		Z	2.74	66.39	15.13		150.0	
10162-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.75	66.68	15.22	0.00	150.0	± 9.6 %
		Y	2.90	68.06	16.02		150.0	
		Z	2.85	66.58	15.27		150.0	
10166-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.28	68.95	18.78	3.01	150.0	± 9.6 %
		Y	3.31	69.87	19.15		150.0	
		Z	3.47	69.23	19.04		150.0	
10167-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	3.90	71.38	18.99	3.01	150.0	± 9.6 %
		Y	4.22	73.89	19.98		150.0	
		Z	4.17	71.78	19.34		150.0	

EX3DV4- SN:3825

December 10, 2018

10168-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.43	74.18	20.63	3.01	150.0	± 9.6 %
		Y	5.01	77.52	21.92		150.0	
		Z	4.70	74.40	20.88		150.0	
10169-CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.66	67.54	18.12	3.01	150.0	± 9.6 %
		Y	2.79	69.24	18.86		150.0	
		Z	2.83	68.22	18.60		150.0	
10170-CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.49	72.80	20.29	3.01	150.0	± 9.6 %
		Y	4.37	78.16	22.40		150.0	
		Z	3.78	73.78	20.89		150.0	
10171-AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	2.85	68.60	17.34	3.01	150.0	± 9.6 %
		Y	3.25	71.99	18.71		150.0	
		Z	3.09	69.49	17.94		150.0	
10172-CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.56	83.91	25.76	6.02	65.0	± 9.6 %
		Y	4.99	82.67	24.89		65.0	
		Z	8.42	91.59	28.95		65.0	
10173-CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	9.11	89.68	25.88	6.02	65.0	± 9.6 %
		Y	10.79	92.89	26.16		65.0	
		Z	16.58	100.48	29.89		65.0	
10174-CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	5.90	81.56	22.56	6.02	65.0	± 9.6 %
		Y	7.04	85.07	23.06		65.0	
		Z	10.62	91.39	26.51		65.0	
10175-CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.63	67.23	17.86	3.01	150.0	± 9.6 %
		Y	2.75	68.88	18.58		150.0	
		Z	2.80	67.89	18.34		150.0	
10176-CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.50	72.83	20.31	3.01	150.0	± 9.6 %
		Y	4.38	78.19	22.41		150.0	
		Z	3.79	73.81	20.90		150.0	
10177-CAI	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.65	67.37	17.95	3.01	150.0	± 9.6 %
		Y	2.78	69.03	18.67		150.0	
		Z	2.82	68.05	18.44		150.0	
10178-CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.47	72.63	20.20	3.01	150.0	± 9.6 %
		Y	4.33	77.94	22.29		150.0	
		Z	3.75	73.58	20.77		150.0	
10179-CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.13	70.51	18.65	3.01	150.0	± 9.6 %
		Y	3.73	74.80	20.36		150.0	
		Z	3.39	71.47	19.26		150.0	
10180-CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	2.85	68.55	17.30	3.01	150.0	± 9.6 %
		Y	3.24	71.92	18.66		150.0	
		Z	3.08	69.42	17.89		150.0	
10181-CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.64	67.35	17.94	3.01	150.0	± 9.6 %
		Y	2.77	69.01	18.67		150.0	
		Z	2.82	68.03	18.43		150.0	
10182-CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.46	72.61	20.18	3.01	150.0	± 9.6 %
		Y	4.32	77.90	22.27		150.0	
		Z	3.74	73.55	20.76		150.0	
10183-AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	2.84	68.53	17.29	3.01	150.0	± 9.6 %
		Y	3.23	71.89	18.65		150.0	
		Z	3.08	69.40	17.88		150.0	

Certificate No: EX3-3825_Dec18

Page 18 of 39

EX3DV4- SN:3825

December 10, 2018

10184-CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.65	67.39	17.97	3.01	150.0	± 9.6 %
		Y	2.78	69.05	18.69		150.0	
		Z	2.83	68.07	18.45		150.0	
10185-CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.48	72.68	20.22	3.01	150.0	± 9.6 %
		Y	4.35	78.01	22.32		150.0	
		Z	3.76	73.63	20.80		150.0	
10186-AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	2.86	68.59	17.32	3.01	150.0	± 9.6 %
		Y	3.25	71.97	18.69		150.0	
		Z	3.09	69.46	17.92		150.0	
10187-CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.66	67.46	18.04	3.01	150.0	± 9.6 %
		Y	2.79	69.15	18.78		150.0	
		Z	2.83	68.13	18.52		150.0	
10188-CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	3.59	73.34	20.62	3.01	150.0	± 9.6 %
		Y	4.55	78.96	22.81		150.0	
		Z	3.89	74.33	21.21		150.0	
10189-AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	2.92	68.98	17.60	3.01	150.0	± 9.6 %
		Y	3.34	72.52	19.02		150.0	
		Z	3.16	69.88	18.20		150.0	
10193-CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.30	66.26	15.80	0.00	150.0	± 9.6 %
		Y	4.35	66.97	16.12		150.0	
		Z	4.40	66.20	15.82		150.0	
10194-CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.45	66.54	15.94	0.00	150.0	± 9.6 %
		Y	4.49	67.20	16.24		150.0	
		Z	4.56	66.50	15.96		150.0	
10195-CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.49	66.57	15.96	0.00	150.0	± 9.6 %
		Y	4.52	67.21	16.26		150.0	
		Z	4.60	66.53	15.98		150.0	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.29	66.29	15.80	0.00	150.0	± 9.6 %
		Y	4.34	66.96	16.11		150.0	
		Z	4.40	66.24	15.84		150.0	
10197-CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.46	66.55	15.95	0.00	150.0	± 9.6 %
		Y	4.50	67.20	16.25		150.0	
		Z	4.57	66.52	15.97		150.0	
10198-CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.49	66.58	15.97	0.00	150.0	± 9.6 %
		Y	4.52	67.21	16.26		150.0	
		Z	4.60	66.55	15.99		150.0	
10219-CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.24	66.30	15.76	0.00	150.0	± 9.6 %
		Y	4.29	67.01	16.08		150.0	
		Z	4.34	66.25	15.79		150.0	
10220-CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.45	66.52	15.94	0.00	150.0	± 9.6 %
		Y	4.49	67.16	16.23		150.0	
		Z	4.57	66.49	15.96		150.0	
10221-CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.50	66.52	15.96	0.00	150.0	± 9.6 %
		Y	4.53	67.15	16.24		150.0	
		Z	4.61	66.49	15.98		150.0	
10222-CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.86	66.69	16.12	0.00	150.0	± 9.6 %
		Y	4.89	67.19	16.35		150.0	
		Z	4.95	66.68	16.12		150.0	

EX3DV4- SN:3825

December 10, 2018

10223-CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.15	66.94	16.27	0.00	150.0	± 9.6 %
		Y	5.14	67.34	16.43		150.0	
		Z	5.27	66.97	16.29		150.0	
10224-CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.90	66.79	16.09	0.00	150.0	± 9.6 %
		Y	4.93	67.32	16.34		150.0	
		Z	5.00	66.78	16.10		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.54	65.36	14.42	0.00	150.0	± 9.6 %
		Y	2.66	66.60	15.07		150.0	
		Z	2.64	65.32	14.62		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	9.79	91.08	26.44	6.02	65.0	± 9.6 %
		Y	11.90	94.67	26.82		65.0	
		Z	18.21	102.36	30.66		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	9.48	89.26	25.19	6.02	65.0	± 9.6 %
		Y	10.80	91.58	25.14		65.0	
		Z	17.67	100.18	29.25		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	6.59	87.62	27.20	6.02	65.0	± 9.6 %
		Y	6.01	86.28	26.24		65.0	
		Z	10.04	95.61	30.42		65.0	
10229-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	9.18	89.80	25.92	6.02	65.0	± 9.6 %
		Y	10.89	93.03	26.21		65.0	
		Z	16.73	100.61	29.94		65.0	
10230-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	8.84	88.00	24.70	6.02	65.0	± 9.6 %
		Y	9.86	90.03	24.58		65.0	
		Z	16.16	98.50	28.67		65.0	
10231-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	6.28	86.61	26.75	6.02	65.0	± 9.6 %
		Y	5.74	85.32	25.81		65.0	
		Z	9.49	94.36	29.92		65.0	
10232-CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	9.16	89.78	25.91	6.02	65.0	± 9.6 %
		Y	10.87	93.01	26.21		65.0	
		Z	16.69	100.59	29.93		65.0	
10233-CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	8.82	87.97	24.69	6.02	65.0	± 9.6 %
		Y	9.83	90.00	24.57		65.0	
		Z	16.11	98.46	28.66		65.0	
10234-CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	6.05	85.73	26.32	6.02	65.0	± 9.6 %
		Y	5.53	84.48	25.39		65.0	
		Z	9.06	93.28	29.43		65.0	
10235-CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	9.17	89.81	25.93	6.02	65.0	± 9.6 %
		Y	10.89	93.05	26.22		65.0	
		Z	16.72	100.64	29.95		65.0	
10236-CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	8.91	88.11	24.73	6.02	65.0	± 9.6 %
		Y	9.95	90.15	24.61		65.0	
		Z	16.33	98.66	28.71		65.0	
10237-CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	6.28	86.65	26.77	6.02	65.0	± 9.6 %
		Y	5.74	85.35	25.82		65.0	
		Z	9.50	94.44	29.94		65.0	
10238-CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	9.14	89.75	25.90	6.02	65.0	± 9.6 %
		Y	10.84	92.98	26.20		65.0	
		Z	16.66	100.56	29.93		65.0	

Certificate No: EX3-3825_Dec18

Page 20 of 39

EX3DV4- SN:3825

December 10, 2018

10239-CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	8.79	87.94	24.68	6.02	65.0	± 9.6 %
		Y	9.79	89.95	24.55		65.0	
		Z	16.06	98.42	28.65		65.0	
10240-CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	6.27	86.62	26.76	6.02	65.0	± 9.6 %
		Y	5.73	85.32	25.82		65.0	
		Z	9.47	94.38	29.93		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	7.27	79.77	24.62	6.98	65.0	± 9.6 %
		Y	7.59	81.70	25.05		65.0	
		Z	8.03	81.09	25.51		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.68	78.02	23.81	6.98	65.0	± 9.6 %
		Y	6.72	79.33	24.04		65.0	
		Z	7.50	79.65	24.83		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	5.49	74.87	23.36	6.98	65.0	± 9.6 %
		Y	5.41	75.47	23.34		65.0	
		Z	6.08	76.26	24.27		65.0	
10244-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	4.33	71.15	15.62	3.98	65.0	± 9.6 %
		Y	3.70	68.81	13.68		65.0	
		Z	6.30	76.91	19.01		65.0	
10245-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	4.22	70.53	15.29	3.98	65.0	± 9.6 %
		Y	3.63	68.31	13.39		65.0	
		Z	6.06	76.03	18.59		65.0	
10246-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	3.75	72.46	16.32	3.98	65.0	± 9.6 %
		Y	3.54	71.59	15.58		65.0	
		Z	5.32	77.48	19.15		65.0	
10247-CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	4.03	70.62	16.32	3.98	65.0	± 9.6 %
		Y	3.93	70.25	15.71		65.0	
		Z	4.87	73.24	18.13		65.0	
10248-CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	4.02	70.13	16.09	3.98	65.0	± 9.6 %
		Y	3.89	69.68	15.44		65.0	
		Z	4.83	72.62	17.83		65.0	
10249-CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	5.14	77.47	19.56	3.98	65.0	± 9.6 %
		Y	5.02	77.02	19.06		65.0	
		Z	6.67	81.38	21.64		65.0	
10250-CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	5.15	74.34	19.98	3.98	65.0	± 9.6 %
		Y	5.18	74.46	19.70		65.0	
		Z	5.82	75.97	21.02		65.0	
10251-CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	4.87	72.11	18.60	3.98	65.0	± 9.6 %
		Y	4.85	72.15	18.30		65.0	
		Z	5.49	73.63	19.63		65.0	
10252-CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	5.81	78.74	21.35	3.98	65.0	± 9.6 %
		Y	5.85	78.91	21.19		65.0	
		Z	6.84	81.00	22.55		65.0	
10253-CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	5.06	71.60	18.87	3.98	65.0	± 9.6 %
		Y	5.09	71.88	18.72		65.0	
		Z	5.57	72.77	19.65		65.0	
10254-CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	5.40	72.62	19.66	3.98	65.0	± 9.6 %
		Y	5.44	72.91	19.49		65.0	
		Z	5.93	73.76	20.41		65.0	

EX3DV4- SN:3825

December 10, 2018

10255-CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	5.55	75.82	20.54	3.98	65.0	± 9.6 %
		Y	5.65	76.23	20.51		65.0	
		Z	6.25	77.30	21.37		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	3.10	66.50	12.26	3.98	65.0	± 9.6 %
		Y	2.64	64.59	10.42		65.0	
		Z	4.63	71.96	15.83		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	3.04	65.94	11.88	3.98	65.0	± 9.6 %
		Y	2.60	64.17	10.11		65.0	
		Z	4.42	70.94	15.27		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	2.62	67.20	12.90	3.98	65.0	± 9.6 %
		Y	2.45	66.32	12.04		65.0	
		Z	3.80	72.05	16.00		65.0	
10259-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	4.48	72.10	17.69	3.98	65.0	± 9.6 %
		Y	4.42	71.93	17.21		65.0	
		Z	5.25	74.31	19.19		65.0	
10260-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	4.51	71.85	17.59	3.98	65.0	± 9.6 %
		Y	4.44	71.67	17.09		65.0	
		Z	5.27	74.01	19.07		65.0	
10261-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	5.18	77.28	20.02	3.98	65.0	± 9.6 %
		Y	5.16	77.16	19.67		65.0	
		Z	6.35	80.26	21.67		65.0	
10262-CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	5.14	74.26	19.92	3.98	65.0	± 9.6 %
		Y	5.16	74.37	19.64		65.0	
		Z	5.81	75.90	20.97		65.0	
10263-CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	4.86	72.08	18.60	3.98	65.0	± 9.6 %
		Y	4.84	72.13	18.29		65.0	
		Z	5.48	73.60	19.63		65.0	
10264-CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	5.74	78.51	21.24	3.98	65.0	± 9.6 %
		Y	5.79	78.69	21.08		65.0	
		Z	6.76	80.78	22.44		65.0	
10265-CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	5.13	72.01	19.12	3.98	65.0	± 9.6 %
		Y	5.16	72.24	18.98		65.0	
		Z	5.68	73.27	19.90		65.0	
10266-CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	5.52	73.15	20.01	3.98	65.0	± 9.6 %
		Y	5.56	73.42	19.87		65.0	
		Z	6.08	74.34	20.74		65.0	
10267-CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	5.79	76.35	20.57	3.98	65.0	± 9.6 %
		Y	5.89	76.78	20.58		65.0	
		Z	6.56	77.96	21.42		65.0	
10268-CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	5.80	72.18	19.69	3.98	65.0	± 9.6 %
		Y	5.84	72.48	19.61		65.0	
		Z	6.31	73.22	20.31		65.0	
10269-CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	5.80	71.83	19.58	3.98	65.0	± 9.6 %
		Y	5.85	72.16	19.50		65.0	
		Z	6.29	72.82	20.18		65.0	
10270-CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	5.80	74.06	19.83	3.98	65.0	± 9.6 %
		Y	5.90	74.55	19.87		65.0	
		Z	6.39	75.25	20.48		65.0	

EX3DV4- SN:3825

December 10, 2018

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.34	65.67	14.29	0.00	150.0	± 9.6 %
		Y	2.50	67.24	15.16		150.0	
		Z	2.41	65.53	14.42		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.32	65.85	13.80	0.00	150.0	± 9.6 %
		Y	1.57	68.74	15.74		150.0	
		Z	1.38	65.72	13.91		150.0	
10277-CAA	PHS (QPSK)	X	2.04	60.78	6.41	9.03	50.0	± 9.6 %
		Y	1.96	60.65	6.14		50.0	
		Z	2.32	61.89	7.59		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	3.40	66.93	12.16	9.03	50.0	± 9.6 %
		Y	3.15	65.88	11.27		50.0	
		Z	4.80	72.27	15.53		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	3.49	67.18	12.34	9.03	50.0	± 9.6 %
		Y	3.21	66.07	11.42		50.0	
		Z	4.93	72.56	15.70		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	0.83	63.07	9.45	0.00	150.0	± 9.6 %
		Y	1.12	67.27	12.08		150.0	
		Z	1.02	64.51	10.99		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	0.47	61.06	7.84	0.00	150.0	± 9.6 %
		Y	0.69	65.35	11.05		150.0	
		Z	0.59	62.25	9.39		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	0.53	62.64	9.03	0.00	150.0	± 9.6 %
		Y	1.25	73.12	14.92		150.0	
		Z	0.66	64.12	10.73		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	0.70	65.55	11.00	0.00	150.0	± 9.6 %
		Y	9.85	99.27	23.72		150.0	
		Z	0.85	67.12	12.69		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	9.56	83.31	21.84	9.03	50.0	± 9.6 %
		Y	8.81	81.66	20.80		50.0	
		Z	10.16	85.95	23.89		50.0	
10297-AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.38	68.06	15.50	0.00	150.0	± 9.6 %
		Y	2.61	70.06	16.80		150.0	
		Z	2.46	67.98	15.49		150.0	
10298-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.05	63.59	10.62	0.00	150.0	± 9.6 %
		Y	1.26	66.47	12.43		150.0	
		Z	1.22	64.62	11.81		150.0	
10299-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	1.74	65.14	11.10	0.00	150.0	± 9.6 %
		Y	1.73	65.31	10.54		150.0	
		Z	2.37	68.58	13.64		150.0	
10300-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	1.40	62.21	8.85	0.00	150.0	± 9.6 %
		Y	1.31	62.00	8.13		150.0	
		Z	1.77	64.18	10.74		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.59	65.56	17.19	4.17	50.0	± 9.6 %
		Y	4.50	65.92	17.36		50.0	
		Z	4.71	65.39	17.22		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	4.99	65.81	17.71	4.96	50.0	± 9.6 %
		Y	4.89	66.09	17.83		50.0	
		Z	5.19	65.93	17.88		50.0	

EX3DV4- SN:3825

December 10, 2018

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.75	65.47	17.52	4.96	50.0	± 9.6 %
		Y	4.66	65.76	17.65		50.0	
		Z	4.95	65.61	17.72		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.55	65.31	17.01	4.17	50.0	± 9.6 %
		Y	4.48	65.71	17.20		50.0	
		Z	4.74	65.40	17.18		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.46	68.47	19.35	6.02	35.0	± 9.6 %
		Y	4.24	68.00	19.03		35.0	
		Z	4.67	68.73	19.81		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.66	67.05	18.92	6.02	35.0	± 9.6 %
		Y	4.49	66.82	18.71		35.0	
		Z	4.86	67.24	19.26		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.57	67.22	18.87	6.02	35.0	± 9.6 %
		Y	4.38	66.92	18.63		35.0	
		Z	4.78	67.48	19.25		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.56	67.48	19.04	6.02	35.0	± 9.6 %
		Y	4.37	67.15	18.80		35.0	
		Z	4.77	67.73	19.40		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.70	67.20	19.04	6.02	35.0	± 9.6 %
		Y	4.50	66.88	18.79		35.0	
		Z	4.91	67.44	19.39		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.62	67.16	18.92	6.02	35.0	± 9.6 %
		Y	4.45	66.91	18.71		35.0	
		Z	4.82	67.34	19.25		35.0	
10311-AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	2.72	67.39	15.26	0.00	150.0	± 9.6 %
		Y	2.98	69.30	16.44		150.0	
		Z	2.80	67.34	15.23		150.0	
10313-AAA	iDEN 1:3	X	2.53	68.60	13.65	6.99	70.0	± 9.6 %
		Y	2.91	70.68	14.85		70.0	
		Z	3.49	72.40	15.69		70.0	
10314-AAA	iDEN 1:6	X	3.78	74.98	18.97	10.00	30.0	± 9.6 %
		Y	4.47	78.04	20.50		30.0	
		Z	5.58	81.34	21.91		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	0.93	62.52	13.93	0.17	150.0	± 9.6 %
		Y	1.07	64.13	15.22		150.0	
		Z	0.97	62.52	14.01		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.35	66.28	15.93	0.17	150.0	± 9.6 %
		Y	4.37	66.83	16.14		150.0	
		Z	4.46	66.29	16.00		150.0	
10317-AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.35	66.28	15.93	0.17	150.0	± 9.6 %
		Y	4.37	66.83	16.14		150.0	
		Z	4.46	66.29	16.00		150.0	
10400-AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.42	66.56	15.92	0.00	150.0	± 9.6 %
		Y	4.45	67.17	16.21		150.0	
		Z	4.55	66.54	15.94		150.0	
10401-AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.17	66.80	16.16	0.00	150.0	± 9.6 %
		Y	5.09	66.93	16.18		150.0	
		Z	5.30	66.88	16.22		150.0	

Certificate No: EX3-3825_Dec18

Page 24 of 39

EX3DV4- SN:3825

December 10, 2018

10402-AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.42	67.05	16.17	0.00	150.0	± 9.6 %
		Y	5.44	67.53	16.38		150.0	
		Z	5.52	67.08	16.18		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	0.83	63.07	9.45	0.00	115.0	± 9.6 %
		Y	1.12	67.27	12.08		115.0	
		Z	1.02	64.51	10.99		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	0.83	63.07	9.45	0.00	115.0	± 9.6 %
		Y	1.12	67.27	12.08		115.0	
		Z	1.02	64.51	10.99		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	35.12	107.13	26.32	0.00	100.0	± 9.6 %
		Y	100.00	111.67	25.04		100.0	
		Z	75.76	120.37	30.56		100.0	
10410-AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	X	23.66	103.17	25.36	3.23	80.0	± 9.6 %
		Y	12.76	93.13	21.62		80.0	
		Z	100.00	125.58	31.92		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	0.87	61.83	13.42	0.00	150.0	± 9.6 %
		Y	1.01	63.52	14.83		150.0	
		Z	0.90	61.73	13.41		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.30	66.29	15.88	0.00	150.0	± 9.6 %
		Y	4.34	66.94	16.18		150.0	
		Z	4.40	66.23	15.90		150.0	
10417-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.30	66.29	15.88	0.00	150.0	± 9.6 %
		Y	4.34	66.94	16.18		150.0	
		Z	4.40	66.23	15.90		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.29	66.46	15.91	0.00	150.0	± 9.6 %
		Y	4.34	67.15	16.24		150.0	
		Z	4.39	66.38	15.91		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.31	66.40	15.91	0.00	150.0	± 9.6 %
		Y	4.35	67.08	16.22		150.0	
		Z	4.41	66.34	15.92		150.0	
10422-AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.42	66.40	15.93	0.00	150.0	± 9.6 %
		Y	4.46	67.05	16.23		150.0	
		Z	4.53	66.35	15.94		150.0	
10423-AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.56	66.68	16.03	0.00	150.0	± 9.6 %
		Y	4.58	67.31	16.32		150.0	
		Z	4.68	66.65	16.05		150.0	
10424-AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.49	66.63	16.00	0.00	150.0	± 9.6 %
		Y	4.52	67.26	16.29		150.0	
		Z	4.60	66.60	16.02		150.0	
10425-AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.12	66.95	16.25	0.00	150.0	± 9.6 %
		Y	5.11	67.37	16.43		150.0	
		Z	5.22	66.96	16.26		150.0	
10426-AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.14	67.04	16.29	0.00	150.0	± 9.6 %
		Y	5.12	67.42	16.45		150.0	
		Z	5.25	67.04	16.30		150.0	

EX3DV4-- SN:3825

December 10, 2018

10427-AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.12	66.90	16.22	0.00	150.0	± 9.6 %
		Y	5.10	67.26	16.36		150.0	
		Z	5.25	66.98	16.27		150.0	
10430-AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.04	71.00	17.80	0.00	150.0	± 9.6 %
		Y	4.42	73.30	18.81		150.0	
		Z	4.08	70.39	17.74		150.0	
10431-AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	3.92	66.75	15.71	0.00	150.0	± 9.6 %
		Y	3.97	67.58	16.10		150.0	
		Z	4.04	66.68	15.78		150.0	
10432-AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.24	66.66	15.90	0.00	150.0	± 9.6 %
		Y	4.28	67.38	16.23		150.0	
		Z	4.36	66.61	15.93		150.0	
10433-AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.50	66.66	16.02	0.00	150.0	± 9.6 %
		Y	4.53	67.30	16.32		150.0	
		Z	4.62	66.63	16.04		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.09	71.63	17.53	0.00	150.0	± 9.6 %
		Y	4.64	74.52	18.75		150.0	
		Z	4.14	71.07	17.57		150.0	
10435-AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	20.75	101.29	24.82	3.23	80.0	± 9.6 %
		Y	11.39	91.62	21.14		80.0	
		Z	100.00	125.34	31.81		80.0	
10447-AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.14	66.37	14.55	0.00	150.0	± 9.6 %
		Y	3.23	67.51	15.07		150.0	
		Z	3.29	66.41	14.83		150.0	
10448-AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.77	66.52	15.57	0.00	150.0	± 9.6 %
		Y	3.84	67.38	15.98		150.0	
		Z	3.89	66.45	15.63		150.0	
10449-AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.07	66.48	15.78	0.00	150.0	± 9.6 %
		Y	4.13	67.22	16.15		150.0	
		Z	4.18	66.42	15.81		150.0	
10450-AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.28	66.42	15.86	0.00	150.0	± 9.6 %
		Y	4.33	67.09	16.18		150.0	
		Z	4.38	66.38	15.88		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	2.96	66.18	13.85	0.00	150.0	± 9.6 %
		Y	3.03	67.30	14.35		150.0	
		Z	3.14	66.39	14.30		150.0	
10456-AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.07	67.66	16.52	0.00	150.0	± 9.6 %
		Y	6.01	67.84	16.55		150.0	
		Z	6.11	67.57	16.46		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.62	64.98	15.58	0.00	150.0	± 9.6 %
		Y	3.70	65.70	15.91		150.0	
		Z	3.68	64.88	15.59		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.59	70.13	16.35	0.00	150.0	± 9.6 %
		Y	3.95	72.43	17.28		150.0	
		Z	3.73	70.02	16.73		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.89	68.83	17.96	0.00	150.0	± 9.6 %
		Y	5.01	69.96	18.25		150.0	
		Z	4.98	68.40	18.00		150.0	

Certificate No: EX3-3825_Dec18

Page 26 of 39

EX3DV4- SN:3825

December 10, 2018

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	0.66	65.10	13.39	0.00	150.0	± 9.6 %
		Y	0.91	69.49	16.70		150.0	
		Z	0.69	64.76	13.43		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	36.20	111.27	28.18	3.29	80.0	± 9.6 %
		Y	4.38	82.97	19.80		80.0	
		Z	100.00	129.98	34.02		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.97	61.03	8.63	3.23	80.0	± 9.6 %
		Y	0.77	60.00	6.96		80.0	
		Z	14.84	88.58	19.25		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.88	60.00	7.55	3.23	80.0	± 9.6 %
		Y	0.80	60.00	6.38		80.0	
		Z	2.02	67.30	11.83		80.0	
10464-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	15.56	98.22	24.12	3.23	80.0	± 9.6 %
		Y	2.77	76.61	16.99		80.0	
		Z	100.00	127.20	32.56		80.0	
10465-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.52	8.30	3.23	80.0	± 9.6 %
		Y	0.78	60.00	6.90		80.0	
		Z	5.56	78.36	16.24		80.0	
10466-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.88	60.00	7.51	3.23	80.0	± 9.6 %
		Y	0.81	60.00	6.33		80.0	
		Z	1.68	65.49	11.02		80.0	
10467-AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	20.49	101.84	25.08	3.23	80.0	± 9.6 %
		Y	3.04	77.79	17.44		80.0	
		Z	100.00	127.54	32.71		80.0	
10468-AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.93	60.67	8.40	3.23	80.0	± 9.6 %
		Y	0.77	60.00	6.92		80.0	
		Z	6.84	80.53	16.93		80.0	
10469-AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.88	60.00	7.51	3.23	80.0	± 9.6 %
		Y	0.80	60.00	6.33		80.0	
		Z	1.69	65.54	11.05		80.0	
10470-AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	20.78	102.04	25.12	3.23	80.0	± 9.6 %
		Y	3.04	77.81	17.44		80.0	
		Z	100.00	127.57	32.71		80.0	
10471-AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.92	60.63	8.37	3.23	80.0	± 9.6 %
		Y	0.77	60.00	6.91		80.0	
		Z	6.69	80.28	16.84		80.0	
10472-AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.87	60.00	7.49	3.23	80.0	± 9.6 %
		Y	0.80	60.00	6.32		80.0	
		Z	1.67	65.46	11.00		80.0	
10473-AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	20.48	101.82	25.06	3.23	80.0	± 9.6 %
		Y	3.02	77.74	17.41		80.0	
		Z	100.00	127.53	32.69		80.0	
10474-AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.92	60.61	8.35	3.23	80.0	± 9.6 %
		Y	0.77	60.00	6.90		80.0	
		Z	6.56	80.10	16.78		80.0	
10475-AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.87	60.00	7.49	3.23	80.0	± 9.6 %
		Y	0.80	60.00	6.32		80.0	
		Z	1.67	65.42	10.98		80.0	

EX3DV4-- SN:3825

December 10, 2018

10477-AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.48	8.26	3.23	80.0	± 9.6 %
		Y	0.77	60.00	6.88		80.0	
		Z	5.60	78.42	16.24		80.0	
10478-AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.87	60.00	7.48	3.23	80.0	± 9.6 %
		Y	0.80	60.00	6.31		80.0	
		Z	1.65	65.33	10.93		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	8.75	88.54	23.04	3.23	80.0	± 9.6 %
		Y	5.71	82.47	20.49		80.0	
		Z	17.61	99.91	27.38		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.38	74.20	16.18	3.23	80.0	± 9.6 %
		Y	2.88	69.55	13.55		80.0	
		Z	14.94	90.58	22.52		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.13	69.70	14.05	3.23	80.0	± 9.6 %
		Y	2.09	65.73	11.57		80.0	
		Z	9.69	83.94	20.08		80.0	
10482-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.67	64.88	12.46	2.23	80.0	± 9.6 %
		Y	1.69	65.40	12.54		80.0	
		Z	2.39	68.90	15.04		80.0	
10483-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.46	66.30	12.79	2.23	80.0	± 9.6 %
		Y	1.78	62.93	10.44		80.0	
		Z	5.50	76.66	17.99		80.0	
10484-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.36	65.55	12.45	2.23	80.0	± 9.6 %
		Y	1.75	62.50	10.22		80.0	
		Z	4.84	74.75	17.28		80.0	
10485-AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.29	68.66	15.47	2.23	80.0	± 9.6 %
		Y	2.40	69.63	15.79		80.0	
		Z	2.89	71.37	17.16		80.0	
10486-AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.28	65.34	13.35	2.23	80.0	± 9.6 %
		Y	2.29	65.80	13.31		80.0	
		Z	2.82	67.70	15.05		80.0	
10487-AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.29	65.07	13.20	2.23	80.0	± 9.6 %
		Y	2.29	65.45	13.12		80.0	
		Z	2.83	67.36	14.89		80.0	
10488-AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.81	69.57	16.98	2.23	80.0	± 9.6 %
		Y	2.88	70.27	17.25		80.0	
		Z	3.27	71.19	17.93		80.0	
10489-AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.93	67.11	15.87	2.23	80.0	± 9.6 %
		Y	3.00	67.81	16.04		80.0	
		Z	3.26	68.16	16.66		80.0	
10490-AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.02	67.04	15.86	2.23	80.0	± 9.6 %
		Y	3.08	67.69	15.99		80.0	
		Z	3.36	68.05	16.63		80.0	
10491-AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.15	68.77	16.91	2.23	80.0	± 9.6 %
		Y	3.20	69.34	17.12		80.0	
		Z	3.55	69.98	17.61		80.0	
10492-AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.34	66.83	16.22	2.23	80.0	± 9.6 %
		Y	3.38	67.37	16.34		80.0	
		Z	3.64	67.62	16.79		80.0	

Certificate No: EX3-3825_Dec18

Page 28 of 39

EX3DV4- SN:3825

December 10, 2018

10493-AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.40	66.75	16.20	2.23	80.0	± 9.6 %
		Y	3.44	67.27	16.29		80.0	
		Z	3.70	67.52	16.76		80.0	
10494-AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.34	69.88	17.25	2.23	80.0	± 9.6 %
		Y	3.40	70.48	17.51		80.0	
		Z	3.81	71.30	18.01		80.0	
10495-AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.36	67.11	16.42	2.23	80.0	± 9.6 %
		Y	3.40	67.62	16.54		80.0	
		Z	3.66	67.95	16.98		80.0	
10496-AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.45	66.96	16.39	2.23	80.0	± 9.6 %
		Y	3.49	67.46	16.51		80.0	
		Z	3.75	67.74	16.93		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.08	60.27	8.87	2.23	80.0	± 9.6 %
		Y	1.05	60.35	8.68		80.0	
		Z	1.60	64.03	11.74		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.24	60.00	7.67	2.23	80.0	± 9.6 %
		Y	1.18	60.00	7.30		80.0	
		Z	1.35	60.00	8.61		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.25	60.00	7.53	2.23	80.0	± 9.6 %
		Y	1.20	60.00	7.14		80.0	
		Z	1.37	60.00	8.47		80.0	
10500-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.50	69.02	16.09	2.23	80.0	± 9.6 %
		Y	2.60	69.91	16.39		80.0	
		Z	3.01	71.09	17.41		80.0	
10501-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.59	66.33	14.45	2.23	80.0	± 9.6 %
		Y	2.64	66.97	14.53		80.0	
		Z	3.04	68.04	15.74		80.0	
10502-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.63	66.20	14.33	2.23	80.0	± 9.6 %
		Y	2.67	66.79	14.37		80.0	
		Z	3.09	67.91	15.62		80.0	
10503-AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.78	69.38	16.88	2.23	80.0	± 9.6 %
		Y	2.85	70.07	17.15		80.0	
		Z	3.23	70.99	17.83		80.0	
10504-AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.91	67.01	15.81	2.23	80.0	± 9.6 %
		Y	2.98	67.70	15.97		80.0	
		Z	3.25	68.07	16.60		80.0	
10505-AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.00	66.95	15.80	2.23	80.0	± 9.6 %
		Y	3.06	67.59	15.93		80.0	
		Z	3.34	67.95	16.57		80.0	
10506-AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.32	69.74	17.17	2.23	80.0	± 9.6 %
		Y	3.38	70.34	17.43		80.0	
		Z	3.77	71.16	17.93		80.0	
10507-AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.34	67.05	16.38	2.23	80.0	± 9.6 %
		Y	3.38	67.56	16.50		80.0	
		Z	3.65	67.89	16.94		80.0	

EX3DV4- SN:3825

December 10, 2018

10508-AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.44	66.89	16.35	2.23	80.0	± 9.6 %
		Y	3.47	67.39	16.46		80.0	
		Z	3.73	67.67	16.88		80.0	
10509-AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.75	69.05	16.96	2.23	80.0	± 9.6 %
		Y	3.82	69.65	17.21		80.0	
		Z	4.15	70.15	17.56		80.0	
10510-AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.85	66.99	16.54	2.23	80.0	± 9.6 %
		Y	3.87	67.42	16.64		80.0	
		Z	4.14	67.72	17.00		80.0	
10511-AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.92	66.83	16.52	2.23	80.0	± 9.6 %
		Y	3.94	67.27	16.61		80.0	
		Z	4.20	67.51	16.96		80.0	
10512-AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.80	70.08	17.23	2.23	80.0	± 9.6 %
		Y	3.88	70.70	17.51		80.0	
		Z	4.28	71.46	17.94		80.0	
10513-AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.72	67.11	16.59	2.23	80.0	± 9.6 %
		Y	3.75	67.53	16.69		80.0	
		Z	4.02	67.93	17.08		80.0	
10514-AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.77	66.82	16.52	2.23	80.0	± 9.6 %
		Y	3.81	67.24	16.61		80.0	
		Z	4.06	67.57	16.98		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	0.83	61.94	13.40	0.00	150.0	± 9.6 %
		Y	0.97	63.72	14.91		150.0	
		Z	0.86	61.82	13.39		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.39	66.03	13.14	0.00	150.0	± 9.6 %
		Y	0.62	71.86	18.23		150.0	
		Z	0.40	65.16	13.02		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.65	63.10	13.39	0.00	150.0	± 9.6 %
		Y	0.81	65.69	15.64		150.0	
		Z	0.68	62.92	13.37		150.0	
10518-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.29	66.37	15.86	0.00	150.0	± 9.6 %
		Y	4.33	67.05	16.18		150.0	
		Z	4.39	66.30	15.87		150.0	
10519-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.45	66.56	15.96	0.00	150.0	± 9.6 %
		Y	4.48	67.21	16.26		150.0	
		Z	4.56	66.53	15.99		150.0	
10520-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.30	66.49	15.87	0.00	150.0	± 9.6 %
		Y	4.34	67.15	16.18		150.0	
		Z	4.41	66.46	15.90		150.0	
10521-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.23	66.46	15.84	0.00	150.0	± 9.6 %
		Y	4.27	67.12	16.16		150.0	
		Z	4.35	66.44	15.87		150.0	
10522-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.29	66.60	15.95	0.00	150.0	± 9.6 %
		Y	4.32	67.22	16.25		150.0	
		Z	4.41	66.56	15.97		150.0	

Certificate No: EX3-3825_Dec18

Page 30 of 39

EX3DV4-- SN:3825

December 10, 2018

10523-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.19	66.51	15.82	0.00	150.0	± 9.6 %
		Y	4.25	67.26	16.19		150.0	
		Z	4.29	66.42	15.81		150.0	
10524-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.23	66.52	15.92	0.00	150.0	± 9.6 %
		Y	4.27	67.20	16.25		150.0	
		Z	4.35	66.47	15.94		150.0	
10525-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.25	65.60	15.53	0.00	150.0	± 9.6 %
		Y	4.31	66.34	15.89		150.0	
		Z	4.35	65.52	15.54		150.0	
10526-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.39	65.90	15.66	0.00	150.0	± 9.6 %
		Y	4.43	66.60	15.99		150.0	
		Z	4.50	65.87	15.67		150.0	
10527-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.31	65.86	15.59	0.00	150.0	± 9.6 %
		Y	4.36	66.58	15.94		150.0	
		Z	4.42	65.82	15.60		150.0	
10528-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.33	65.87	15.62	0.00	150.0	± 9.6 %
		Y	4.38	66.60	15.97		150.0	
		Z	4.44	65.83	15.64		150.0	
10529-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.33	65.87	15.62	0.00	150.0	± 9.6 %
		Y	4.38	66.60	15.97		150.0	
		Z	4.44	65.83	15.64		150.0	
10531-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.30	65.92	15.61	0.00	150.0	± 9.6 %
		Y	4.34	66.61	15.95		150.0	
		Z	4.42	65.91	15.64		150.0	
10532-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.17	65.77	15.53	0.00	150.0	± 9.6 %
		Y	4.22	66.49	15.89		150.0	
		Z	4.29	65.75	15.56		150.0	
10533-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.33	65.94	15.62	0.00	150.0	± 9.6 %
		Y	4.38	66.68	15.98		150.0	
		Z	4.45	65.89	15.63		150.0	
10534-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	4.89	66.00	15.75	0.00	150.0	± 9.6 %
		Y	4.92	66.54	16.00		150.0	
		Z	4.99	65.99	15.76		150.0	
10535-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	4.95	66.16	15.83	0.00	150.0	± 9.6 %
		Y	4.96	66.66	16.06		150.0	
		Z	5.06	66.18	15.85		150.0	
10536-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.83	66.12	15.78	0.00	150.0	± 9.6 %
		Y	4.86	66.68	16.05		150.0	
		Z	4.93	66.11	15.79		150.0	
10537-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.88	66.09	15.78	0.00	150.0	± 9.6 %
		Y	4.92	66.66	16.04		150.0	
		Z	4.98	66.08	15.78		150.0	
10538-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	4.96	66.09	15.82	0.00	150.0	± 9.6 %
		Y	4.98	66.61	16.05		150.0	
		Z	5.07	66.10	15.83		150.0	
10540-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	4.89	66.07	15.82	0.00	150.0	± 9.6 %
		Y	4.91	66.58	16.06		150.0	
		Z	5.01	66.12	15.85		150.0	

Certificate No: EX3-3825_Dec18

Page 31 of 39

EX3DV4- SN:3825

December 10, 2018

10541-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	4.87	65.95	15.75	0.00	150.0	± 9.6 %
		Y	4.90	66.52	16.01		150.0	
		Z	4.98	65.99	15.78		150.0	
10542-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.03	66.07	15.83	0.00	150.0	± 9.6 %
		Y	5.05	66.60	16.06		150.0	
		Z	5.14	66.08	15.84		150.0	
10543-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.09	66.10	15.87	0.00	150.0	± 9.6 %
		Y	5.12	66.65	16.11		150.0	
		Z	5.21	66.11	15.88		150.0	
10544-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.23	66.10	15.76	0.00	150.0	± 9.6 %
		Y	5.27	66.62	15.99		150.0	
		Z	5.32	66.12	15.77		150.0	
10545-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.42	66.56	15.95	0.00	150.0	± 9.6 %
		Y	5.41	66.97	16.12		150.0	
		Z	5.51	66.56	15.95		150.0	
10546-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.27	66.24	15.80	0.00	150.0	± 9.6 %
		Y	5.29	66.73	16.02		150.0	
		Z	5.37	66.30	15.83		150.0	
10547-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.35	66.33	15.84	0.00	150.0	± 9.6 %
		Y	5.37	66.81	16.05		150.0	
		Z	5.44	66.36	15.85		150.0	
10548-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.54	67.12	16.20	0.00	150.0	± 9.6 %
		Y	5.48	67.34	16.29		150.0	
		Z	5.68	67.27	16.28		150.0	
10550-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.33	66.40	15.89	0.00	150.0	± 9.6 %
		Y	5.34	66.86	16.09		150.0	
		Z	5.41	66.37	15.87		150.0	
10551-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.29	66.27	15.79	0.00	150.0	± 9.6 %
		Y	5.29	66.70	15.98		150.0	
		Z	5.40	66.37	15.84		150.0	
10552-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.24	66.18	15.74	0.00	150.0	± 9.6 %
		Y	5.28	66.75	16.00		150.0	
		Z	5.32	66.18	15.75		150.0	
10553-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.30	66.17	15.77	0.00	150.0	± 9.6 %
		Y	5.33	66.69	16.00		150.0	
		Z	5.40	66.21	15.79		150.0	
10554-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.65	66.47	15.86	0.00	150.0	± 9.6 %
		Y	5.68	66.93	16.05		150.0	
		Z	5.73	66.50	15.88		150.0	
10555-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.76	66.74	15.98	0.00	150.0	± 9.6 %
		Y	5.76	67.13	16.14		150.0	
		Z	5.86	66.80	16.01		150.0	
10556-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.79	66.82	16.01	0.00	150.0	± 9.6 %
		Y	5.79	67.21	16.17		150.0	
		Z	5.88	66.85	16.03		150.0	
10557-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.74	66.68	15.96	0.00	150.0	± 9.6 %
		Y	5.76	67.13	16.15		150.0	
		Z	5.83	66.73	15.99		150.0	

EX3DV4- SN:3825

December 10, 2018

10558-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.78	66.81	16.04	0.00	150.0	± 9.6 %
		Y	5.77	67.19	16.19		150.0	
		Z	5.88	66.89	16.08		150.0	
10560-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.78	66.69	16.02	0.00	150.0	± 9.6 %
		Y	5.79	67.12	16.20		150.0	
		Z	5.87	66.74	16.05		150.0	
10561-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.72	66.68	16.05	0.00	150.0	± 9.6 %
		Y	5.72	67.08	16.21		150.0	
		Z	5.80	66.73	16.07		150.0	
10562-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.78	66.90	16.16	0.00	150.0	± 9.6 %
		Y	5.77	67.26	16.30		150.0	
		Z	5.91	67.05	16.23		150.0	
10563-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	5.88	66.84	16.10	0.00	150.0	± 9.6 %
		Y	5.87	67.21	16.24		150.0	
		Z	6.04	67.09	16.22		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.61	66.43	16.01	0.46	150.0	± 9.6 %
		Y	4.64	67.02	16.27		150.0	
		Z	4.72	66.41	16.05		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	4.82	66.87	16.35	0.46	150.0	± 9.6 %
		Y	4.83	67.44	16.59		150.0	
		Z	4.94	66.86	16.38		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.65	66.68	16.14	0.46	150.0	± 9.6 %
		Y	4.67	67.25	16.39		150.0	
		Z	4.77	66.68	16.18		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.69	67.10	16.53	0.46	150.0	± 9.6 %
		Y	4.71	67.70	16.80		150.0	
		Z	4.80	67.08	16.55		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.55	66.42	15.88	0.46	150.0	± 9.6 %
		Y	4.55	66.92	16.09		150.0	
		Z	4.68	66.44	15.94		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.66	67.28	16.64	0.46	150.0	± 9.6 %
		Y	4.71	67.94	16.94		150.0	
		Z	4.77	67.20	16.63		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.67	67.07	16.53	0.46	150.0	± 9.6 %
		Y	4.70	67.70	16.82		150.0	
		Z	4.79	67.04	16.55		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.00	62.99	14.21	0.46	130.0	± 9.6 %
		Y	1.13	64.38	15.29		130.0	
		Z	1.05	63.15	14.40		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.00	63.46	14.51	0.46	130.0	± 9.6 %
		Y	1.14	64.95	15.66		130.0	
		Z	1.06	63.62	14.70		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	0.94	73.85	17.03	0.46	130.0	± 9.6 %
		Y	1.54	82.08	22.00		130.0	
		Z	1.00	73.81	17.37		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.01	67.86	16.72	0.46	130.0	± 9.6 %
		Y	1.23	70.58	18.63		130.0	
		Z	1.08	67.91	16.84		130.0	

EX3DV4- SN:3825

December 10, 2018

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.40	66.21	16.04	0.46	130.0	± 9.6 %
		Y	4.41	66.73	16.23		130.0	
		Z	4.51	66.22	16.11		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.42	66.40	16.12	0.46	130.0	± 9.6 %
		Y	4.44	66.95	16.33		130.0	
		Z	4.54	66.39	16.18		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.60	66.67	16.29	0.46	130.0	± 9.6 %
		Y	4.60	67.17	16.47		130.0	
		Z	4.73	66.68	16.36		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.50	66.81	16.39	0.46	130.0	± 9.6 %
		Y	4.51	67.35	16.60		130.0	
		Z	4.63	66.82	16.45		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.25	65.98	15.61	0.46	130.0	± 9.6 %
		Y	4.25	66.45	15.79		130.0	
		Z	4.39	66.05	15.72		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.30	66.05	15.65	0.46	130.0	± 9.6 %
		Y	4.28	66.47	15.79		130.0	
		Z	4.44	66.11	15.75		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.40	66.85	16.33	0.46	130.0	± 9.6 %
		Y	4.43	67.44	16.57		130.0	
		Z	4.52	66.84	16.39		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.19	65.74	15.38	0.46	130.0	± 9.6 %
		Y	4.18	66.18	15.54		130.0	
		Z	4.33	65.81	15.50		130.0	
10583-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.40	66.21	16.04	0.46	130.0	± 9.6 %
		Y	4.41	66.73	16.23		130.0	
		Z	4.51	66.22	16.11		130.0	
10584-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.42	66.40	16.12	0.46	130.0	± 9.6 %
		Y	4.44	66.95	16.33		130.0	
		Z	4.54	66.39	16.18		130.0	
10585-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.60	66.67	16.29	0.46	130.0	± 9.6 %
		Y	4.60	67.17	16.47		130.0	
		Z	4.73	66.68	16.36		130.0	
10586-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.50	66.81	16.39	0.46	130.0	± 9.6 %
		Y	4.51	67.35	16.60		130.0	
		Z	4.63	66.82	16.45		130.0	
10587-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.25	65.98	15.61	0.46	130.0	± 9.6 %
		Y	4.25	66.45	15.79		130.0	
		Z	4.39	66.05	15.72		130.0	
10588-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.30	66.05	15.65	0.46	130.0	± 9.6 %
		Y	4.28	66.47	15.79		130.0	
		Z	4.44	66.11	15.75		130.0	
10589-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.40	66.85	16.33	0.46	130.0	± 9.6 %
		Y	4.43	67.44	16.57		130.0	
		Z	4.52	66.84	16.39		130.0	
10590-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.19	65.74	15.38	0.46	130.0	± 9.6 %
		Y	4.18	66.18	15.54		130.0	
		Z	4.33	65.81	15.50		130.0	

EX3DV4-SN:3825

December 10, 2018

10591-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.55	66.31	16.18	0.46	130.0	± 9.6 %
		Y	4.57	66.83	16.36		130.0	
		Z	4.67	66.30	16.24		130.0	
10592-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.68	66.62	16.30	0.46	130.0	± 9.6 %
		Y	4.68	67.11	16.48		130.0	
		Z	4.81	66.63	16.37		130.0	
10593-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.60	66.49	16.16	0.46	130.0	± 9.6 %
		Y	4.60	66.98	16.33		130.0	
		Z	4.73	66.52	16.23		130.0	
10594-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.66	66.67	16.33	0.46	130.0	± 9.6 %
		Y	4.66	67.17	16.51		130.0	
		Z	4.78	66.69	16.40		130.0	
10595-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.62	66.63	16.22	0.46	130.0	± 9.6 %
		Y	4.62	67.14	16.41		130.0	
		Z	4.75	66.64	16.29		130.0	
10596-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.55	66.60	16.21	0.46	130.0	± 9.6 %
		Y	4.55	67.09	16.39		130.0	
		Z	4.68	66.62	16.28		130.0	
10597-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.50	66.47	16.06	0.46	130.0	± 9.6 %
		Y	4.50	66.96	16.24		130.0	
		Z	4.63	66.51	16.15		130.0	
10598-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.49	66.71	16.34	0.46	130.0	± 9.6 %
		Y	4.50	67.24	16.54		130.0	
		Z	4.62	66.75	16.42		130.0	
10599-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.24	66.85	16.46	0.46	130.0	± 9.6 %
		Y	5.22	67.20	16.56		130.0	
		Z	5.35	66.88	16.50		130.0	
10600-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.36	67.27	16.64	0.46	130.0	± 9.6 %
		Y	5.29	67.43	16.64		130.0	
		Z	5.49	67.33	16.69		130.0	
10601-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.25	67.01	16.52	0.46	130.0	± 9.6 %
		Y	5.22	67.32	16.61		130.0	
		Z	5.37	67.05	16.57		130.0	
10602-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.38	67.17	16.52	0.46	130.0	± 9.6 %
		Y	5.29	67.29	16.50		130.0	
		Z	5.48	67.14	16.53		130.0	
10603-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.46	67.50	16.82	0.46	130.0	± 9.6 %
		Y	5.37	67.61	16.81		130.0	
		Z	5.55	67.41	16.80		130.0	
10604-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.34	67.15	16.63	0.46	130.0	± 9.6 %
		Y	5.25	67.25	16.60		130.0	
		Z	5.39	66.98	16.57		130.0	
10605-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.36	67.17	16.64	0.46	130.0	± 9.6 %
		Y	5.29	67.36	16.65		130.0	
		Z	5.48	67.23	16.70		130.0	
10606-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.10	66.47	16.13	0.46	130.0	± 9.6 %
		Y	5.09	66.83	16.24		130.0	
		Z	5.20	66.46	16.16		130.0	

Certificate No: EX3-3825_Dec18

Page 35 of 39

EX3DV4- SN:3825

December 10, 2018

10607-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.39	65.60	15.79	0.46	130.0	± 9.6 %
		Y	4.42	66.20	16.02		130.0	
		Z	4.50	65.59	15.84		130.0	
10608-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.54	65.96	15.94	0.46	130.0	± 9.6 %
		Y	4.55	66.51	16.16		130.0	
		Z	4.67	65.97	16.00		130.0	
10609-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.43	65.78	15.75	0.46	130.0	± 9.6 %
		Y	4.45	66.33	15.97		130.0	
		Z	4.56	65.80	15.82		130.0	
10610-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.49	65.95	15.93	0.46	130.0	± 9.6 %
		Y	4.50	66.52	16.15		130.0	
		Z	4.61	65.97	16.00		130.0	
10611-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.40	65.74	15.77	0.46	130.0	± 9.6 %
		Y	4.41	66.30	15.99		130.0	
		Z	4.53	65.76	15.84		130.0	
10612-AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.39	65.87	15.80	0.46	130.0	± 9.6 %
		Y	4.40	66.40	16.01		130.0	
		Z	4.53	65.90	15.87		130.0	
10613-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.39	65.70	15.65	0.46	130.0	± 9.6 %
		Y	4.39	66.21	15.85		130.0	
		Z	4.53	65.77	15.74		130.0	
10614-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.35	65.93	15.91	0.46	130.0	± 9.6 %
		Y	4.37	66.50	16.14		130.0	
		Z	4.48	65.97	15.98		130.0	
10615-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.39	65.56	15.52	0.46	130.0	± 9.6 %
		Y	4.40	66.10	15.73		130.0	
		Z	4.52	65.59	15.60		130.0	
10616-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.04	66.03	16.03	0.46	130.0	± 9.6 %
		Y	5.04	66.45	16.17		130.0	
		Z	5.16	66.08	16.08		130.0	
10617-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.11	66.23	16.10	0.46	130.0	± 9.6 %
		Y	5.07	66.54	16.19		130.0	
		Z	5.23	66.29	16.16		130.0	
10618-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.01	66.25	16.12	0.46	130.0	± 9.6 %
		Y	4.99	66.64	16.26		130.0	
		Z	5.11	66.27	16.16		130.0	
10619-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.01	66.03	15.94	0.46	130.0	± 9.6 %
		Y	5.00	66.43	16.09		130.0	
		Z	5.12	66.07	15.99		130.0	
10620-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.09	66.06	16.01	0.46	130.0	± 9.6 %
		Y	5.07	66.42	16.13		130.0	
		Z	5.21	66.11	16.07		130.0	
10621-AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.11	66.21	16.22	0.46	130.0	± 9.6 %
		Y	5.10	66.60	16.35		130.0	
		Z	5.22	66.27	16.27		130.0	
10622-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.10	66.31	16.26	0.46	130.0	± 9.6 %
		Y	5.08	66.67	16.38		130.0	
		Z	5.23	66.42	16.34		130.0	

Certificate No: EX3-3825_Dec18

Page 36 of 39

EX3DV4- SN:3825

December 10, 2018

10623-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	4.98	65.82	15.87	0.46	130.0	± 9.6 %
		Y	4.97	66.23	16.01		130.0	
		Z	5.11	65.93	15.96		130.0	
10624-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.18	66.09	16.08	0.46	130.0	± 9.6 %
		Y	5.16	66.47	16.20		130.0	
		Z	5.30	66.15	16.14		130.0	
10625-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.36	66.53	16.36	0.46	130.0	± 9.6 %
		Y	5.25	66.59	16.32		130.0	
		Z	5.62	67.00	16.62		130.0	
10626-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.37	66.10	16.00	0.46	130.0	± 9.6 %
		Y	5.37	66.48	16.13		130.0	
		Z	5.47	66.16	16.06		130.0	
10627-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.61	66.74	16.29	0.46	130.0	± 9.6 %
		Y	5.57	66.99	16.35		130.0	
		Z	5.71	66.77	16.33		130.0	
10628-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.37	66.09	15.90	0.46	130.0	± 9.6 %
		Y	5.36	66.43	16.00		130.0	
		Z	5.49	66.21	15.98		130.0	
10629-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.46	66.23	15.96	0.46	130.0	± 9.6 %
		Y	5.44	66.56	16.06		130.0	
		Z	5.56	66.28	16.01		130.0	
10630-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.79	67.44	16.57	0.46	130.0	± 9.6 %
		Y	5.62	67.31	16.44		130.0	
		Z	5.99	67.76	16.74		130.0	
10631-AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.72	67.34	16.72	0.46	130.0	± 9.6 %
		Y	5.66	67.55	16.76		130.0	
		Z	5.88	67.54	16.83		130.0	
10632-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.60	66.87	16.50	0.46	130.0	± 9.6 %
		Y	5.57	67.18	16.59		130.0	
		Z	5.68	66.85	16.51		130.0	
10633-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.44	66.31	16.04	0.46	130.0	± 9.6 %
		Y	5.39	66.55	16.10		130.0	
		Z	5.55	66.38	16.09		130.0	
10634-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.42	66.34	16.11	0.46	130.0	± 9.6 %
		Y	5.43	66.76	16.26		130.0	
		Z	5.53	66.41	16.17		130.0	
10635-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.29	65.60	15.46	0.46	130.0	± 9.6 %
		Y	5.27	65.93	15.56		130.0	
		Z	5.41	65.72	15.55		130.0	
10636-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.80	66.48	16.11	0.46	130.0	± 9.6 %
		Y	5.79	66.81	16.20		130.0	
		Z	5.89	66.54	16.15		130.0	
10637-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	5.94	66.84	16.28	0.46	130.0	± 9.6 %
		Y	5.89	67.06	16.31		130.0	
		Z	6.05	66.94	16.34		130.0	
10638-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	5.94	66.83	16.24	0.46	130.0	± 9.6 %
		Y	5.92	67.14	16.33		130.0	
		Z	6.04	66.90	16.29		130.0	

EX3DV4- SN:3825

December 10, 2018

10639-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	5.91	66.74	16.24	0.46	130.0	± 9.6 %
		Y	5.89	67.05	16.33		130.0	
		Z	6.01	66.83	16.31		130.0	
10640-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	5.90	66.70	16.17	0.46	130.0	± 9.6 %
		Y	5.84	66.92	16.20		130.0	
		Z	6.01	66.82	16.24		130.0	
10641-AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	5.98	66.73	16.20	0.46	130.0	± 9.6 %
		Y	5.93	66.95	16.24		130.0	
		Z	6.07	66.79	16.25		130.0	
10642-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.00	66.93	16.48	0.46	130.0	± 9.6 %
		Y	5.97	67.23	16.55		130.0	
		Z	6.10	67.01	16.53		130.0	
10643-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.85	66.82	16.21	0.46	130.0	± 9.6 %
		Y	5.81	66.87	16.26		130.0	
		Z	5.95	66.70	16.27		130.0	
10644-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	5.93	66.88	16.36	0.46	130.0	± 9.6 %
		Y	5.87	67.08	16.38		130.0	
		Z	6.07	67.10	16.49		130.0	
10645-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.09	67.02	16.40	0.46	130.0	± 9.6 %
		Y	5.97	67.05	16.33		130.0	
		Z	6.27	67.33	16.57		130.0	
10646-AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	10.88	97.79	33.16	9.30	60.0	± 9.6 %
		Y	9.31	94.81	31.81		60.0	
		Z	15.57	105.64	36.23		60.0	
10647-AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	9.68	95.83	32.64	9.30	60.0	± 9.6 %
		Y	8.12	92.42	31.12		60.0	
		Z	13.83	103.60	35.73		60.0	
10648-AAA	CDMA2000 (1x Advanced)	X	0.41	60.00	6.67	0.00	150.0	± 9.6 %
		Y	0.53	62.39	8.91		150.0	
		Z	0.51	60.93	8.11		150.0	
10652-AAD	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.23	65.73	15.57	2.23	80.0	± 9.6 %
		Y	3.32	66.58	15.83		80.0	
		Z	3.44	66.17	16.03		80.0	
10653-AAD	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.81	65.37	16.02	2.23	80.0	± 9.6 %
		Y	3.87	65.99	16.19		80.0	
		Z	4.00	65.71	16.33		80.0	
10654-AAD	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	3.83	65.06	16.08	2.23	80.0	± 9.6 %
		Y	3.89	65.63	16.24		80.0	
		Z	3.99	65.39	16.36		80.0	
10655-AAE	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	3.90	65.02	16.13	2.23	80.0	± 9.6 %
		Y	3.96	65.56	16.28		80.0	
		Z	4.06	65.37	16.41		80.0	
10658-AAA	Pulse Waveform (200Hz, 10%)	X	5.23	73.33	14.72	10.00	50.0	± 9.6 %
		Y	5.58	74.11	14.95		50.0	
		Z	27.28	95.76	22.90		50.0	
10659-AAA	Pulse Waveform (200Hz, 20%)	X	5.22	75.14	14.08	6.99	60.0	± 9.6 %
		Y	8.58	80.47	15.95		60.0	
		Z	100.00	109.17	24.51		60.0	

Certificate No: EX3-3825_Dec18

Page 38 of 39

EX3DV4- SN:3825

December 10, 2018

10660-AAA	Pulse Waveform (200Hz, 40%)	X	2.72	71.08	10.98	3.98	80.0	± 9.6 %
		Y	100.00	103.08	20.19		80.0	
		Z	100.00	105.60	21.56		80.0	
10661-AAA	Pulse Waveform (200Hz, 60%)	X	0.38	60.00	4.92	2.22	100.0	± 9.6 %
		Y	100.00	104.15	19.59		100.0	
		Z	100.00	100.30	18.15		100.0	
10662-AAA	Pulse Waveform (200Hz, 80%)	X	10.49	60.31	1.44	0.97	120.0	± 9.6 %
		Y	100.00	109.71	20.44		120.0	
		Z	0.20	60.00	4.00		120.0	
10670-AAA	Bluetooth Low Energy	X	1.67	69.50	9.56	2.19	100.0	± 9.6 %
		Y	100.00	109.61	22.12		100.0	
		Z	100.00	105.41	20.56		100.0	

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

System check uncertainty

The uncertainty budget has been determined for the DASY5 measurement system according to the SPEAG documents and is given in the following Table.

Repeatability Budget for System Check

<0.3 – 3GHz range Body>

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) lg	Standard (lg)	vi or v _{eff}
Measurement System						
Probe calibration	± 1.8	Normal	1	1	± 1.8	∞
Axial isotropy of the probe	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Spherical isotropy of the probe	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Boundary effects	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Probe linearity	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Detection limit	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Readout electronics	± 0.0	Normal	1	1	± 0.0	∞
Response time	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Integration time	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
RF ambient Noise	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
RF ambient Reflections	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Max.SAR Eval.	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Test Sample Related						
Deviation of wxp.dipole	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Dipole Axis to Liquid Distance	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Input power and SAR drift meas.	± 3.4	Rectangular	$\sqrt{3}$	1	± 2.0	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Algorithm for correcting SAR for deviations in permittivity and conductivity	± 1.9	Rectangular	$\sqrt{3}$	1	± 1.1	∞
Liquid conductivity (meas.)	± 5.0	Normal	1	0.78	+ 3.9	∞
Liquid permittivity (meas.)	± 5.0	Normal	1	0.26	- 1.3	∞
Liquid conductivity - temp.unc (below 2deg.C.)	± 1.7	Rectangular	$\sqrt{3}$	0.78	± 0.8	∞
Liquid permittivity - temp.unc (below 2deg.C.)	± 0.3	Rectangular	$\sqrt{3}$	0.23	± 0.0	∞
Combined Standard Uncertainty						
					± 5.945	
Expanded Uncertainty (k=2)						
					± 11.9	

<3 – 6GHz range Body>

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) lg	Standard (1g)	vi or veff
Measurement System						
Probe calibration	± 1.8	Normal	1	1	± 1.8	∞
Axial isotropy of the probe	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Spherical isotropy of the probe	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Boundary effects	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Probe linearity	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Detection limit	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Readout electronics	± 0.0	Normal	1	1	± 0.0	∞
Response time	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Integration time	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
RF ambient Noise	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
RF ambient Reflections	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 6.7	Rectangular	$\sqrt{3}$	1	± 3.9	∞
Max.SAR Eval.	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Test Sample Related						
Deviation of wxp.dipole	± 0.0	Rectangular	$\sqrt{3}$	1	± 0.0	∞
Dipole Axis to Liquid Distance	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Input power and SAR drift meas.	± 3.4	Rectangular	$\sqrt{3}$	1	± 2.0	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Algorithm for correcting SAR for deviations in permittivity and conductivity	± 1.9	Rectangular	$\sqrt{3}$	1	± 1.1	∞
Liquid conductivity (meas.)	± 5.0	Normal	1	0.78	+ 3.9	∞
Liquid permittivity (meas.)	± 5.0	Normal	1	0.26	- 1.3	∞
Liquid conductivity - temp.unc (below 2deg.C.)	± 1.7	Rectangular	$\sqrt{3}$	0.78	± 0.8	∞
Liquid permittivity - temp.unc (below 2deg.C.)	± 0.3	Rectangular	$\sqrt{3}$	0.23	± 0.0	∞
Combined Standard Uncertainty						
					± 6.906	
Expanded Uncertainty (k=2)						
					± 13.8	