




## HIGH CHANNEL 10

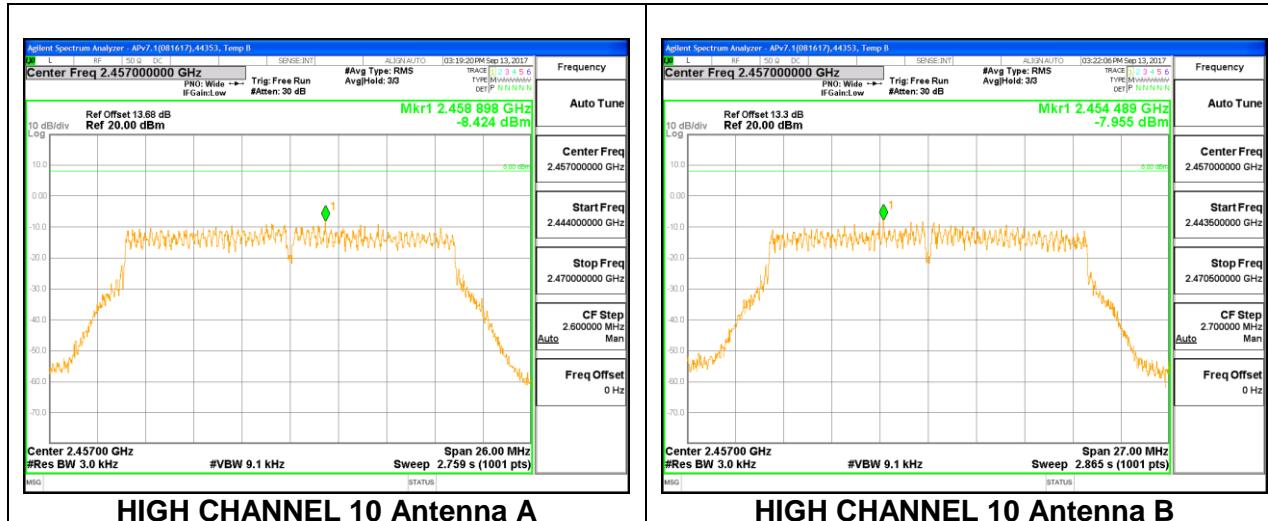


## HIGH CHANNEL 11

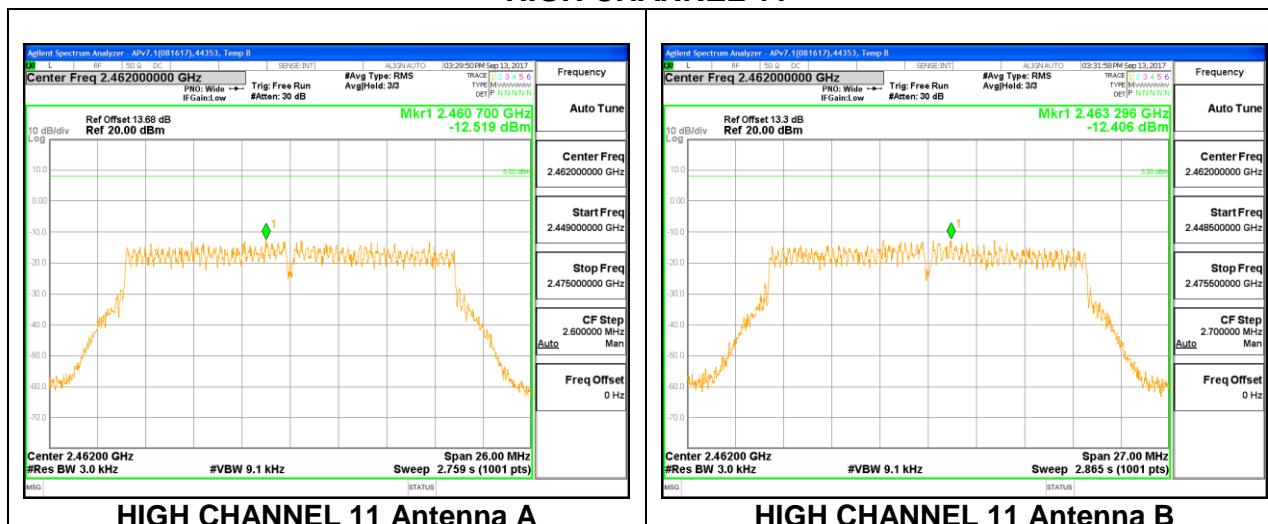

## HIGH CHANNEL 12

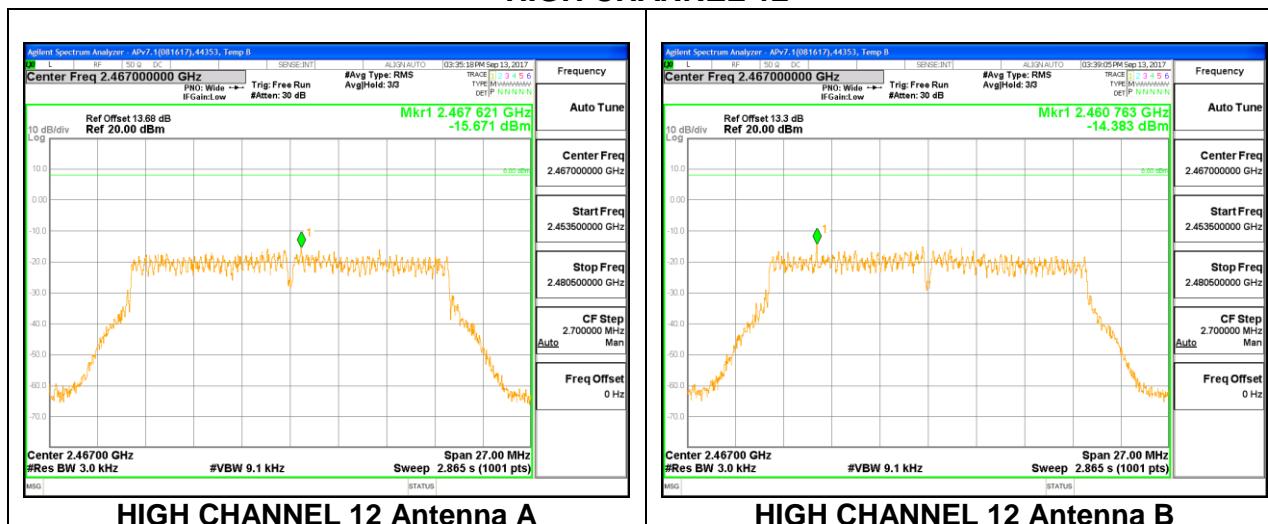

## HIGH CHANNEL 13

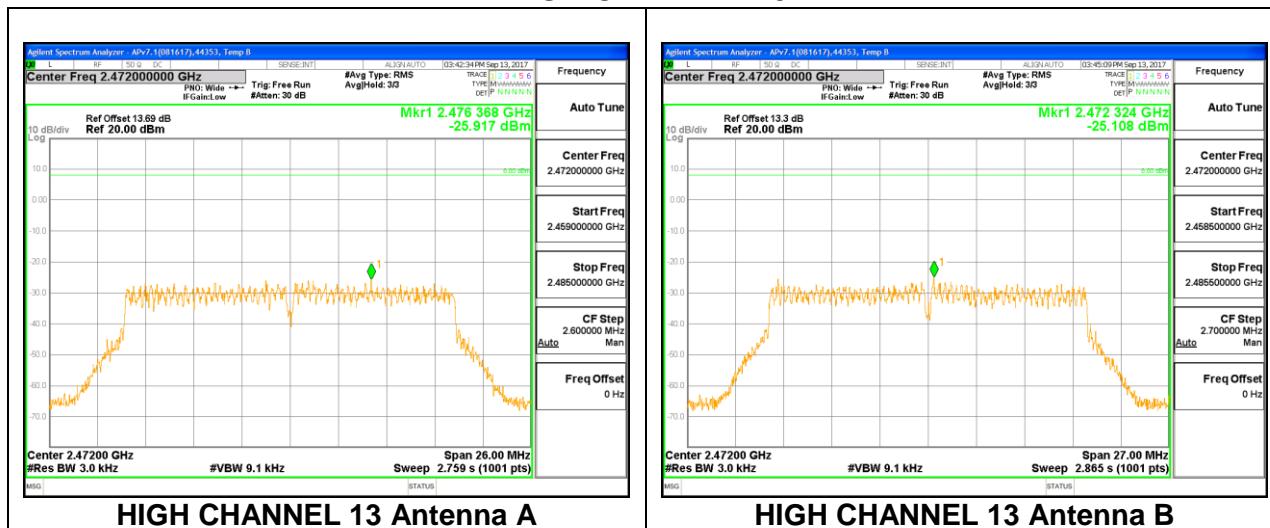

## 9.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)


IC RSS-247 (5.5)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### RESULTS

### 9.7.1. 802.11b MODE


#### 1TX Antenna A

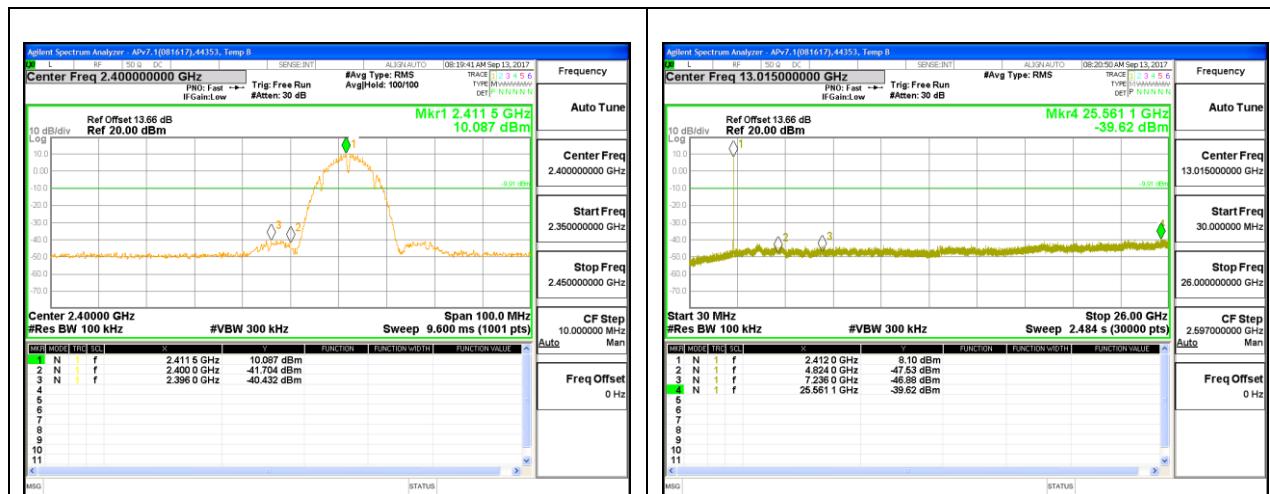


#### LOW CHANNEL 1 BANDEDGE

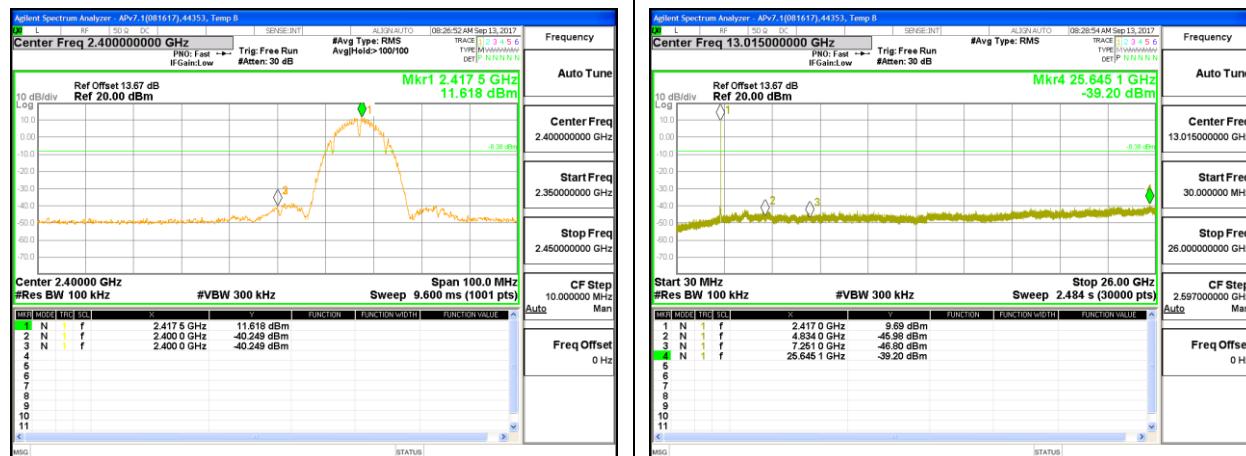


#### LOW CHANNEL 2 BANDEDGE

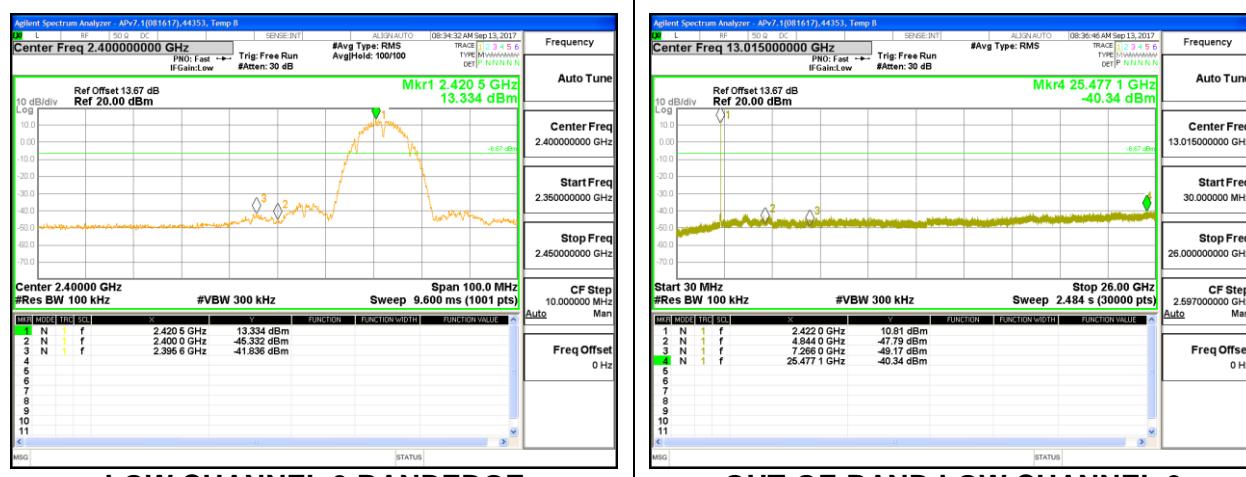



#### LOW CHANNEL 3 BANDEDGE

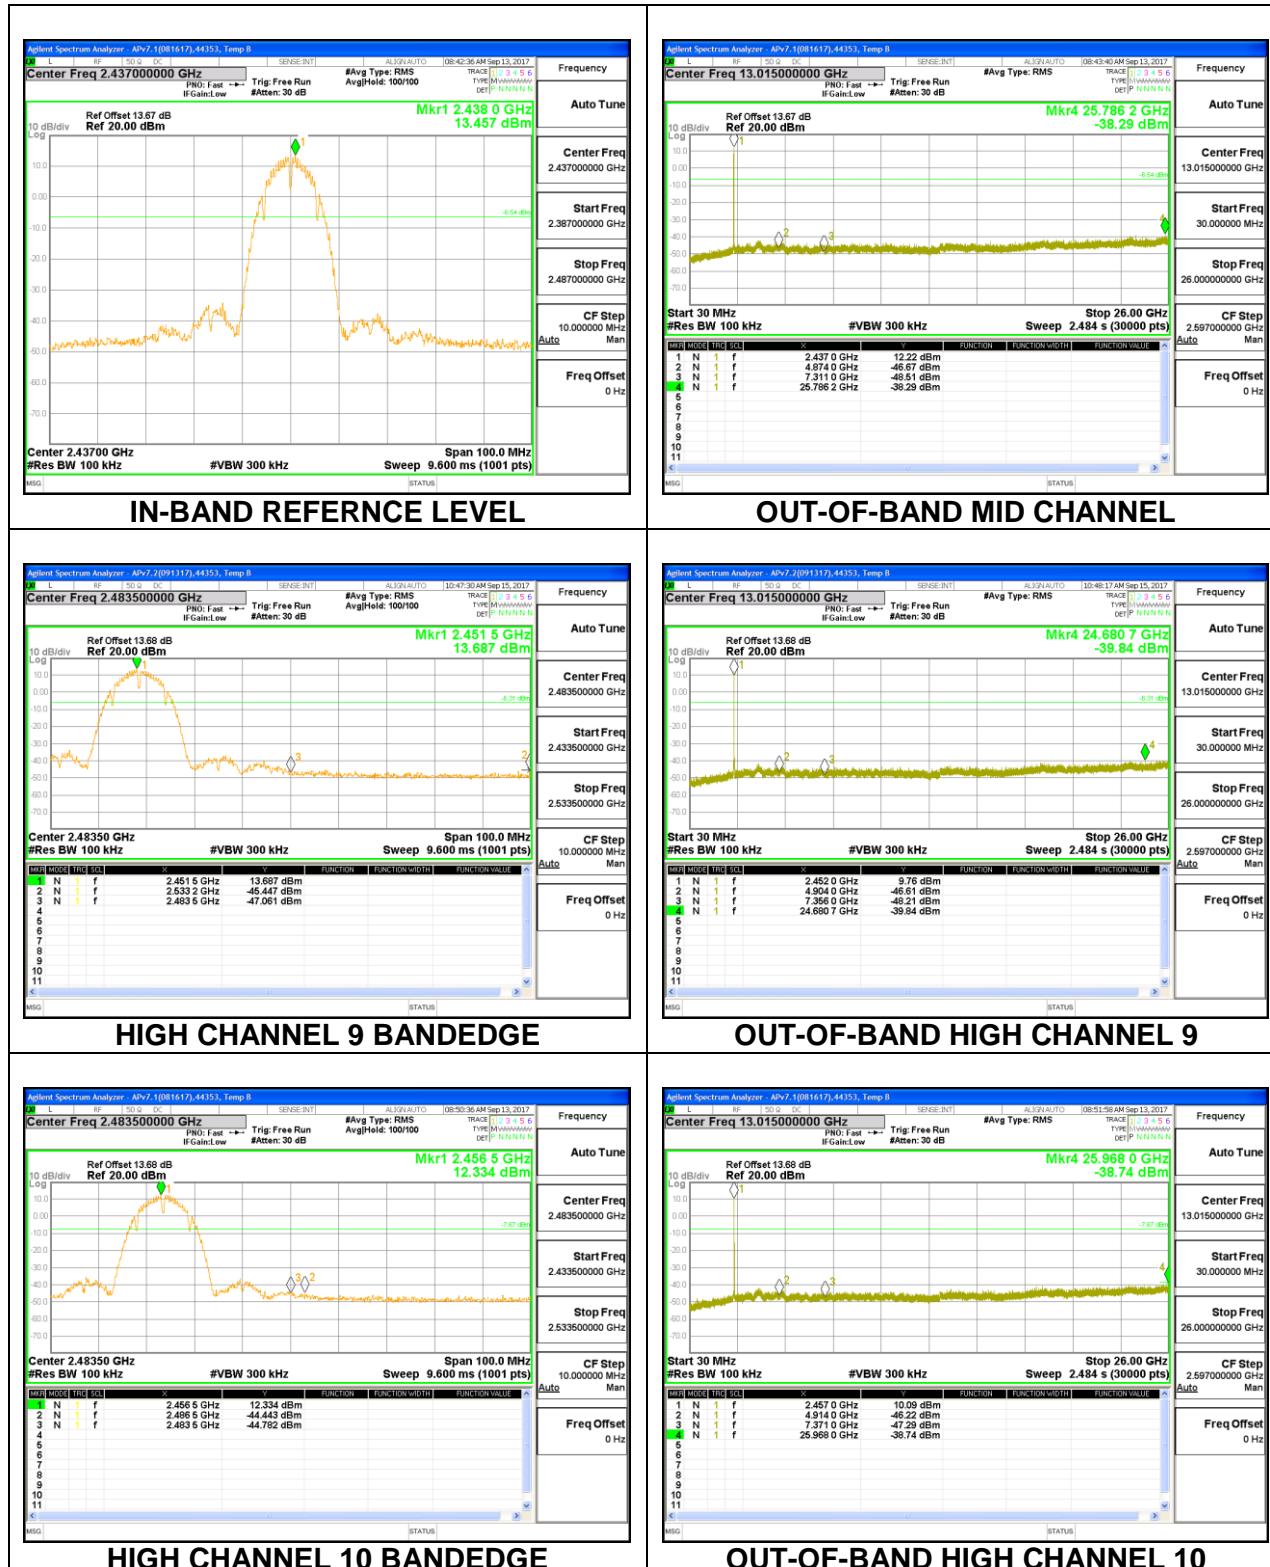


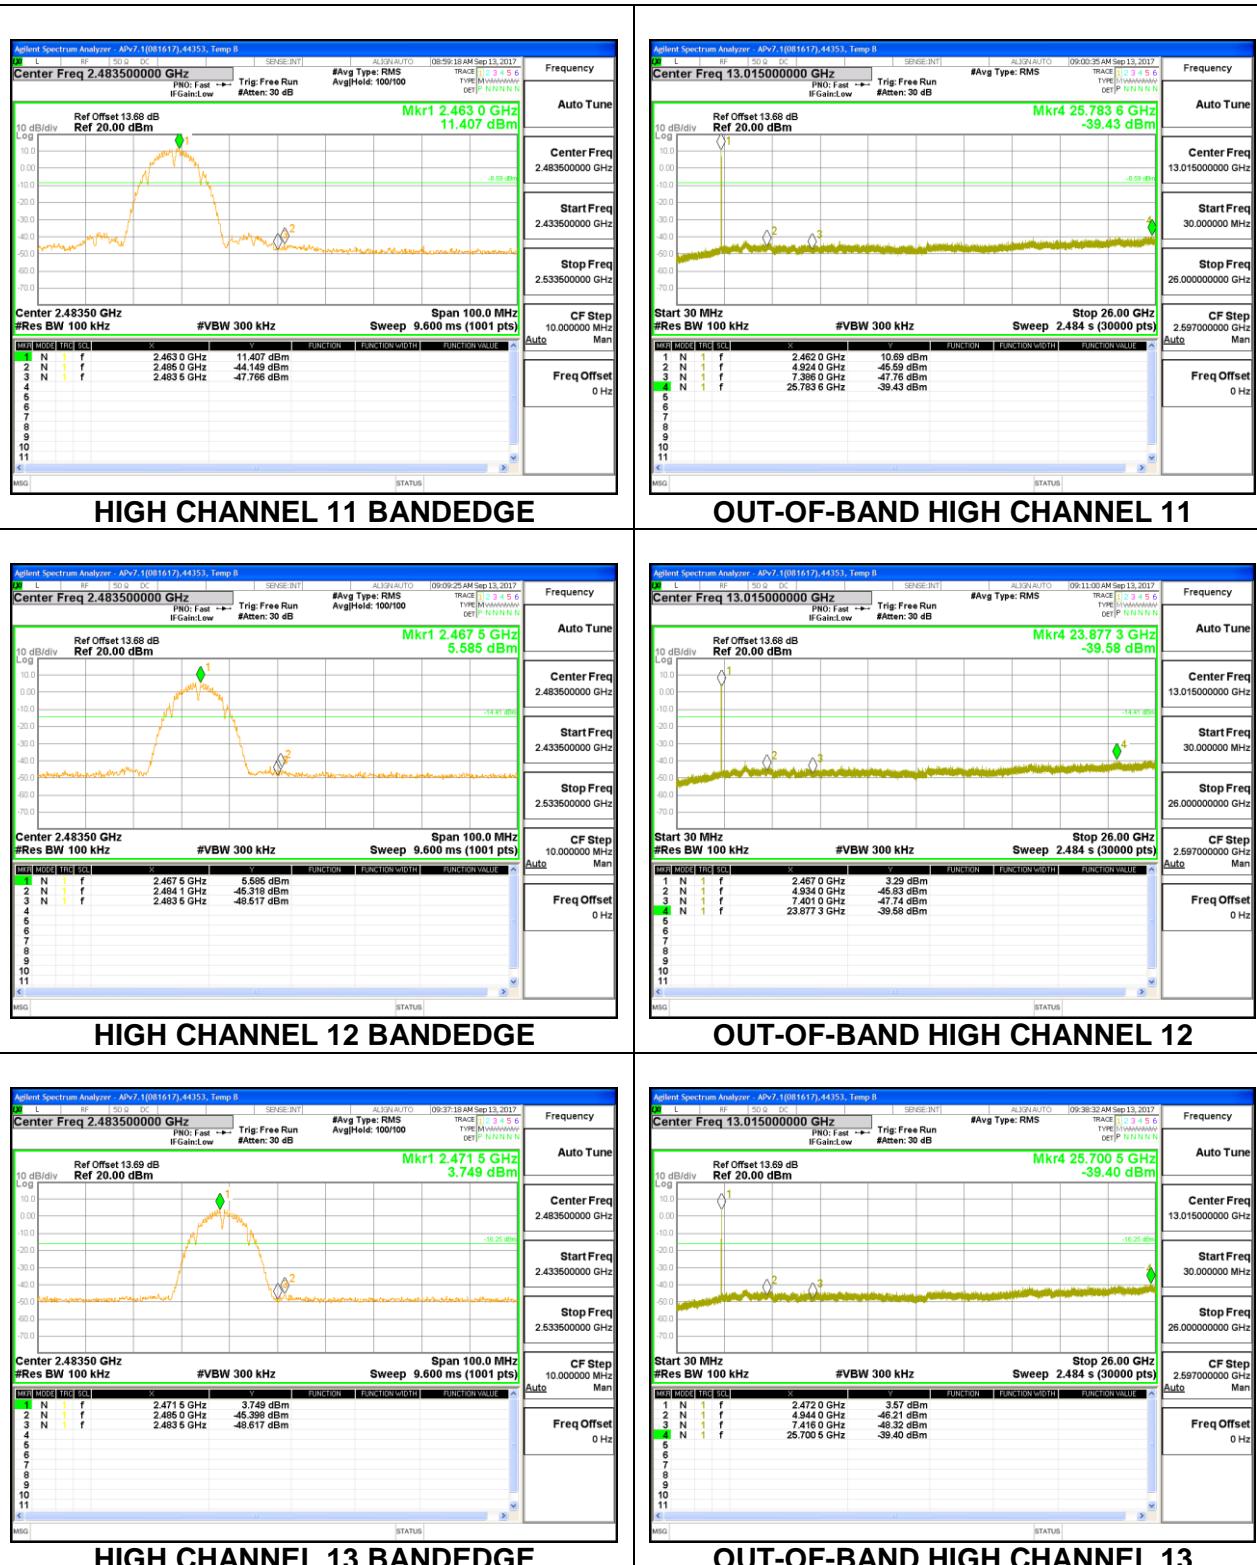

**1TX Antenna B**

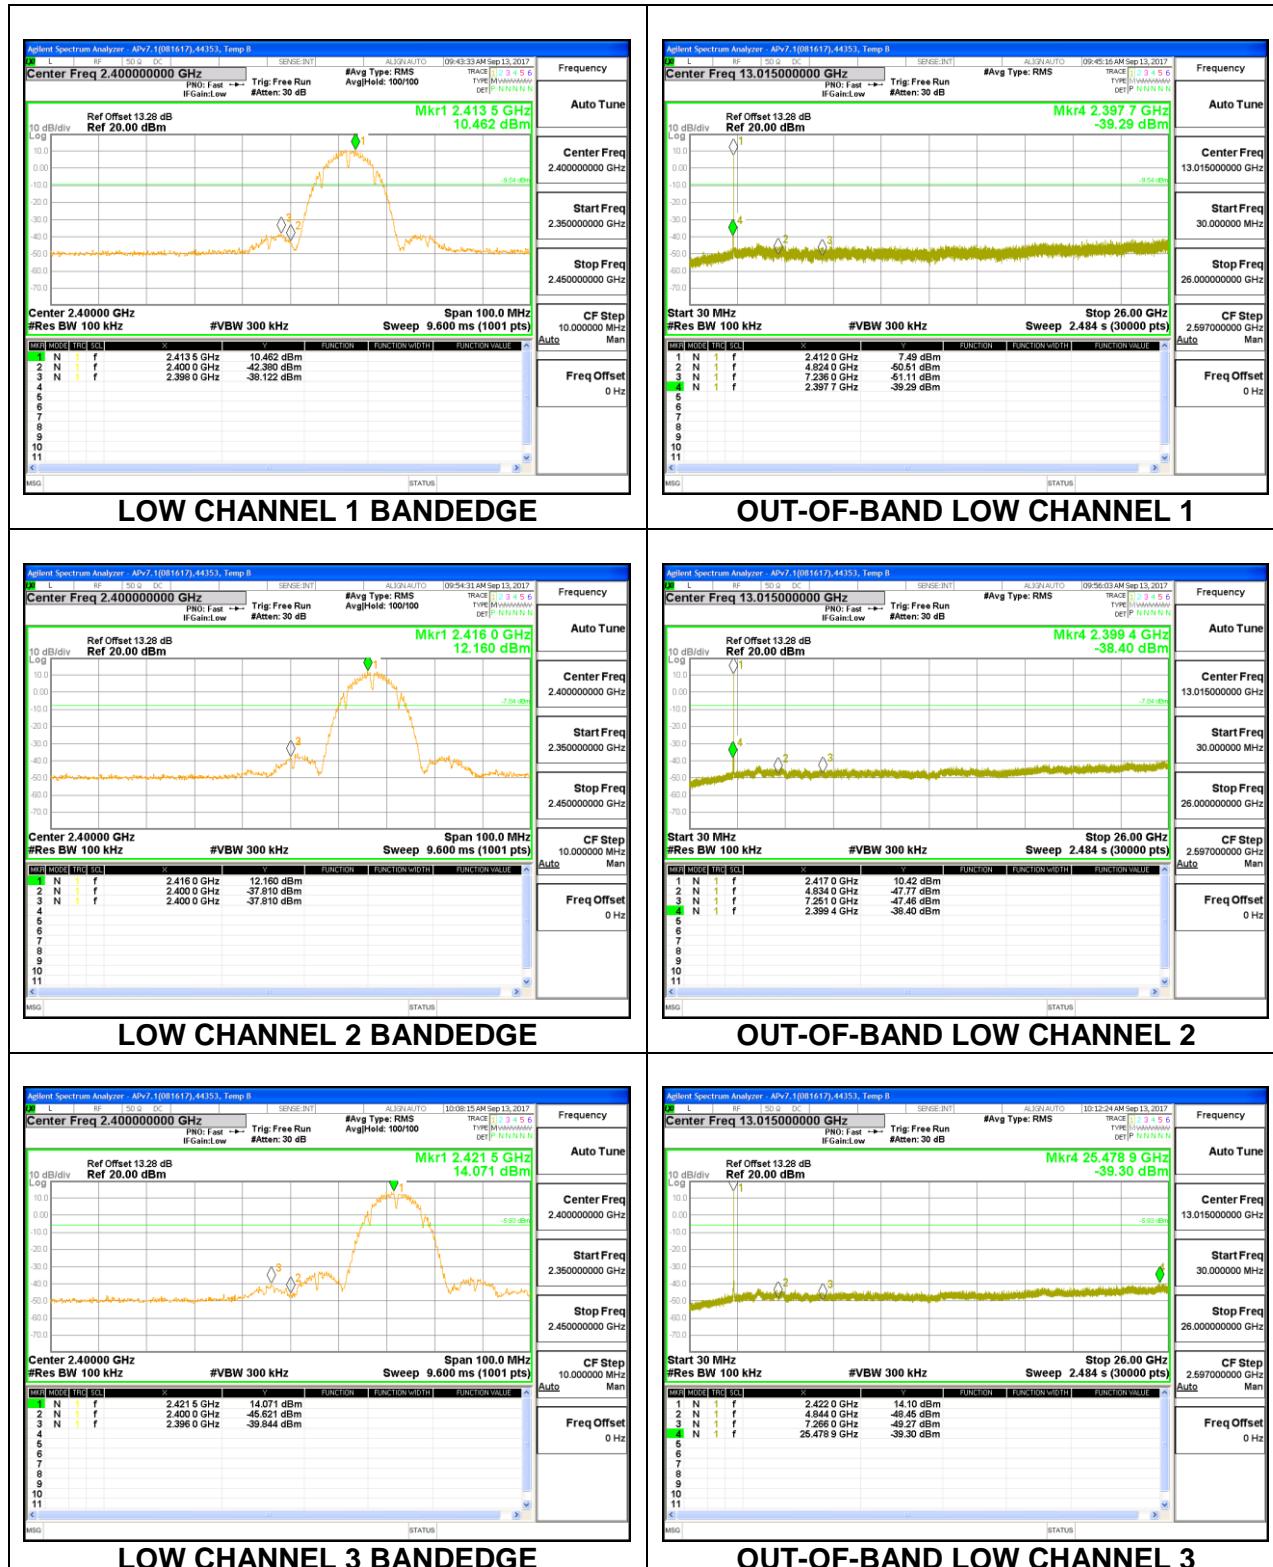

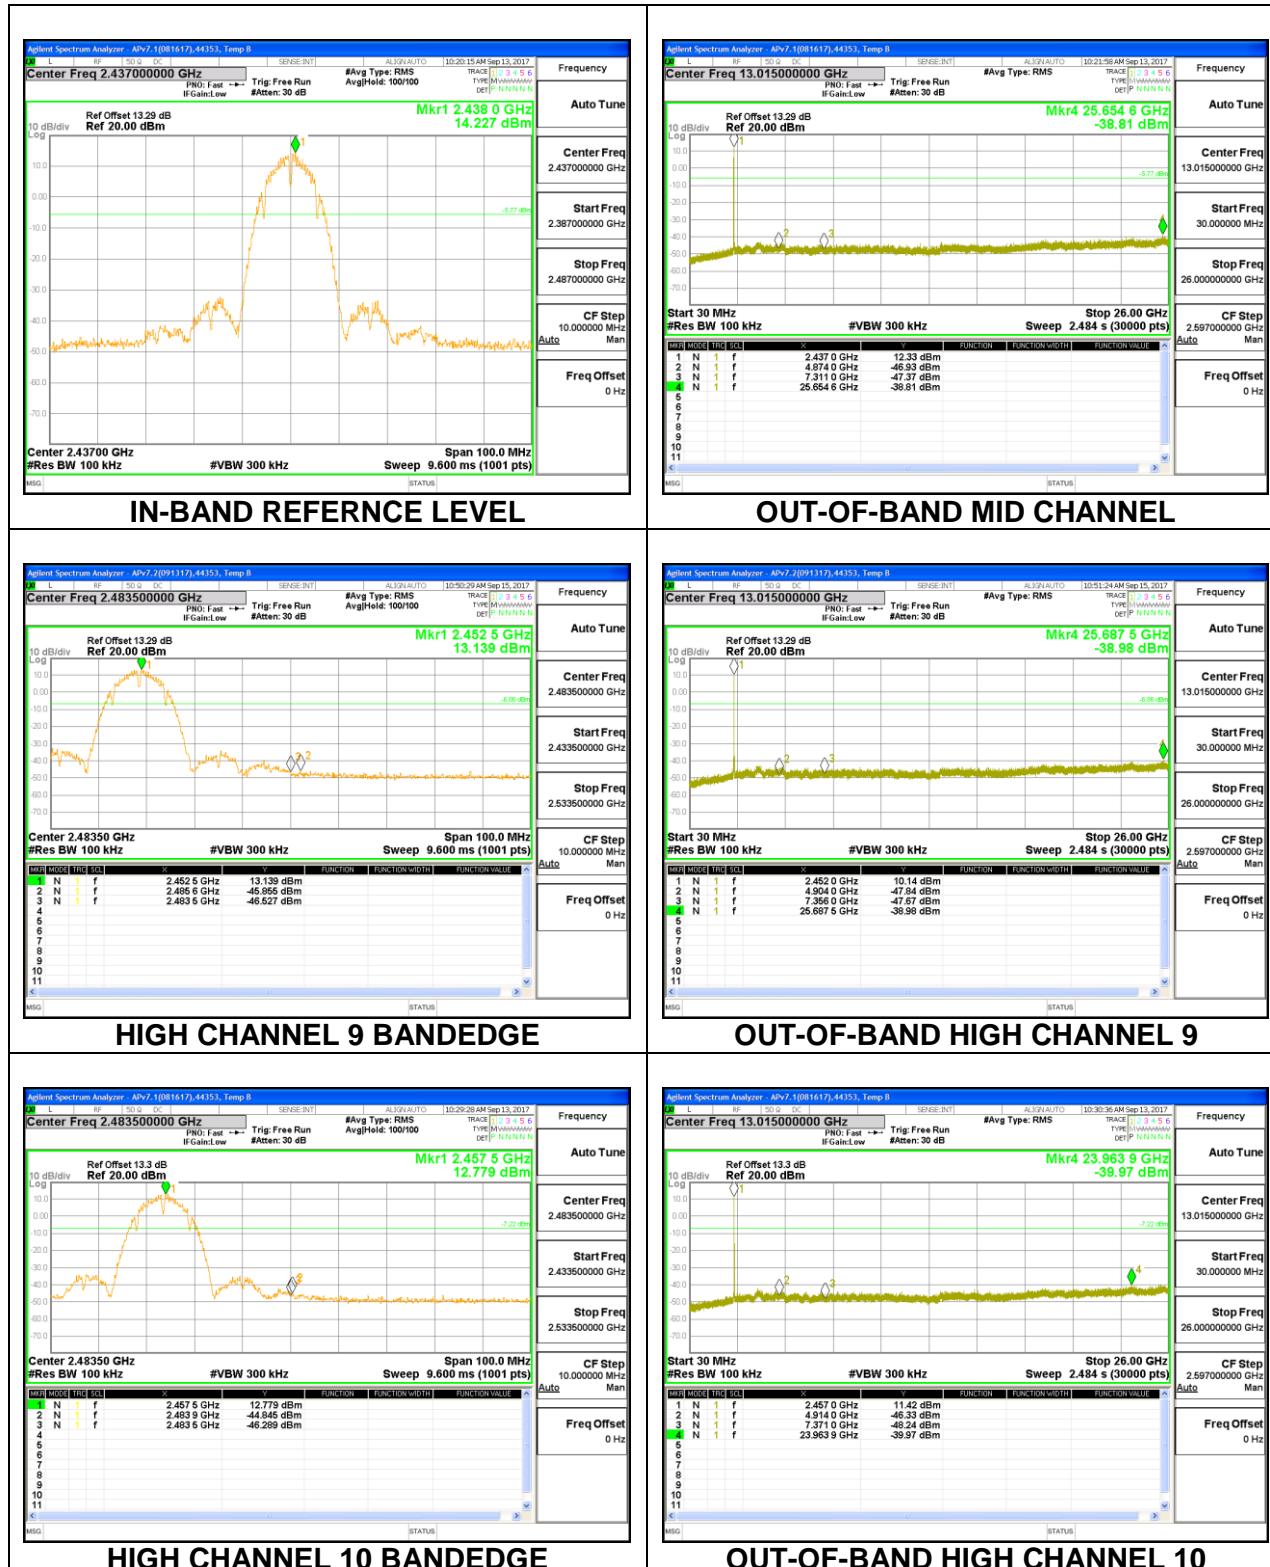

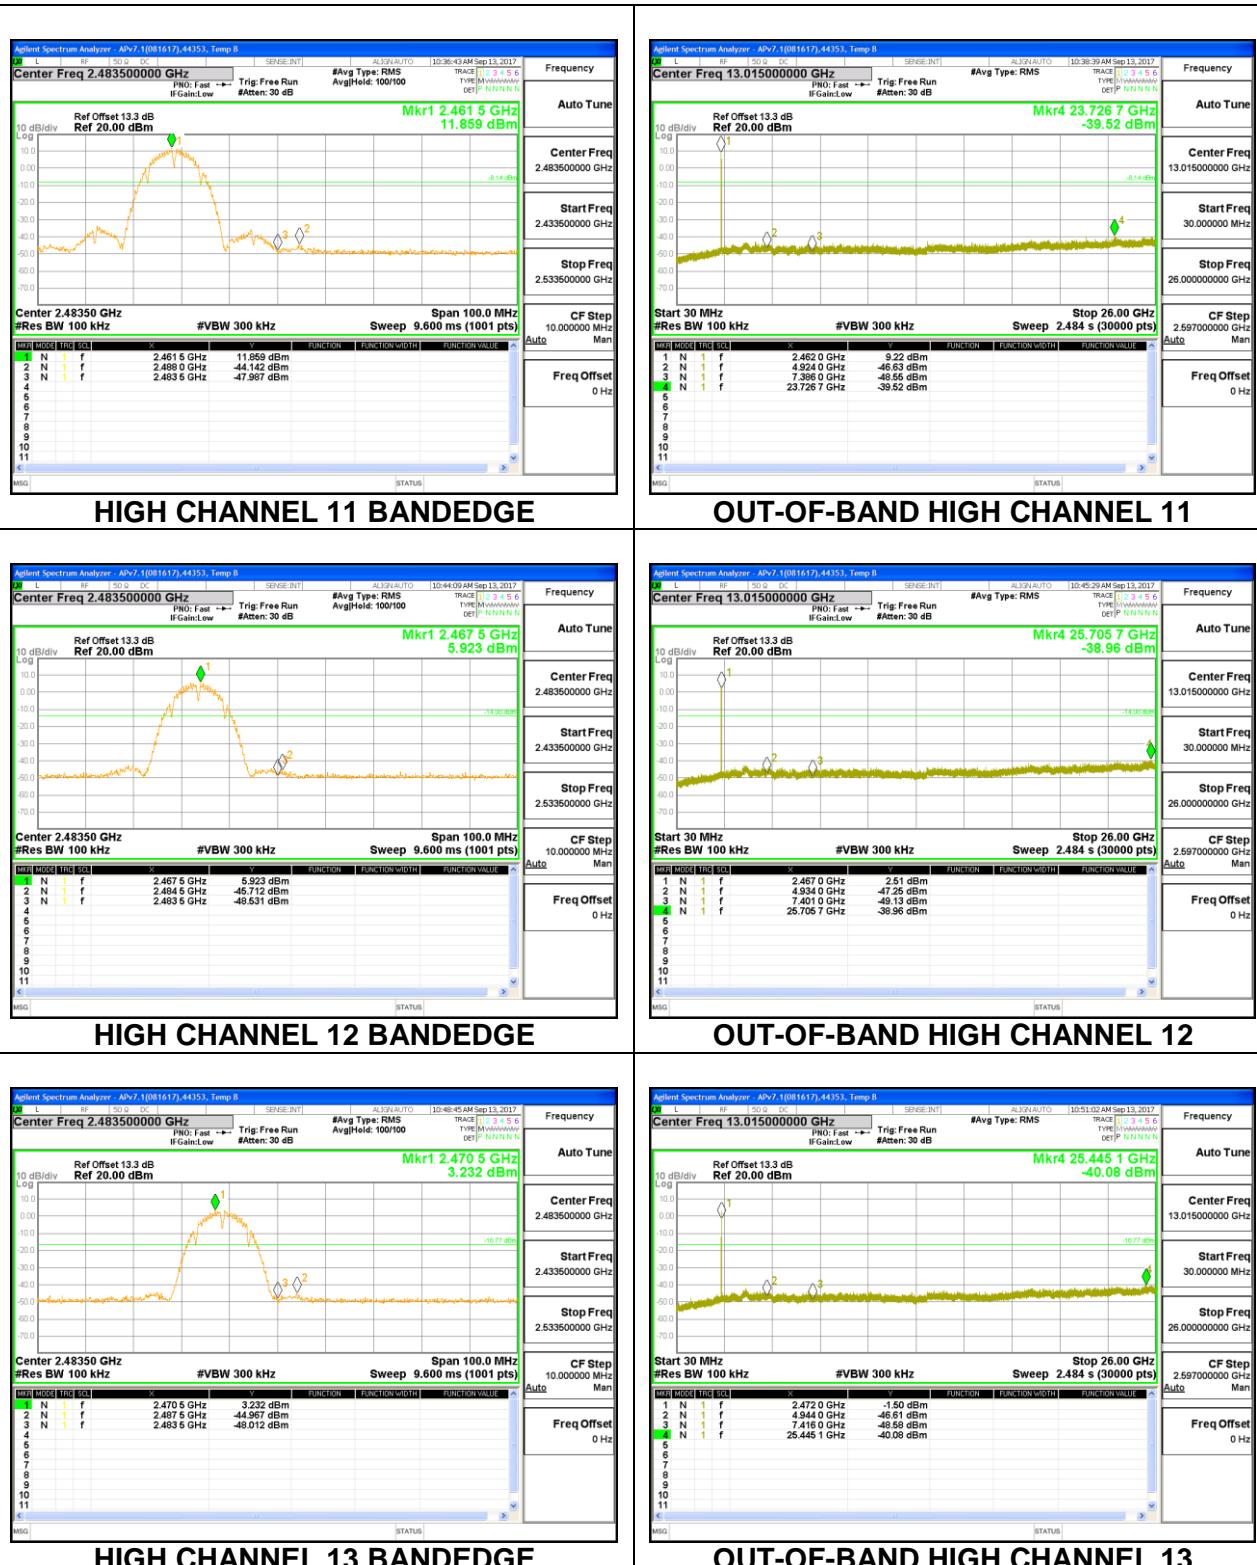


## 9.7.2. 802.11n HT20 SISO MODE

### 1TX Antenna A




LOW CHANNEL 1 BANDEDGE

OUT-OF-BAND LOW CHANNEL 1

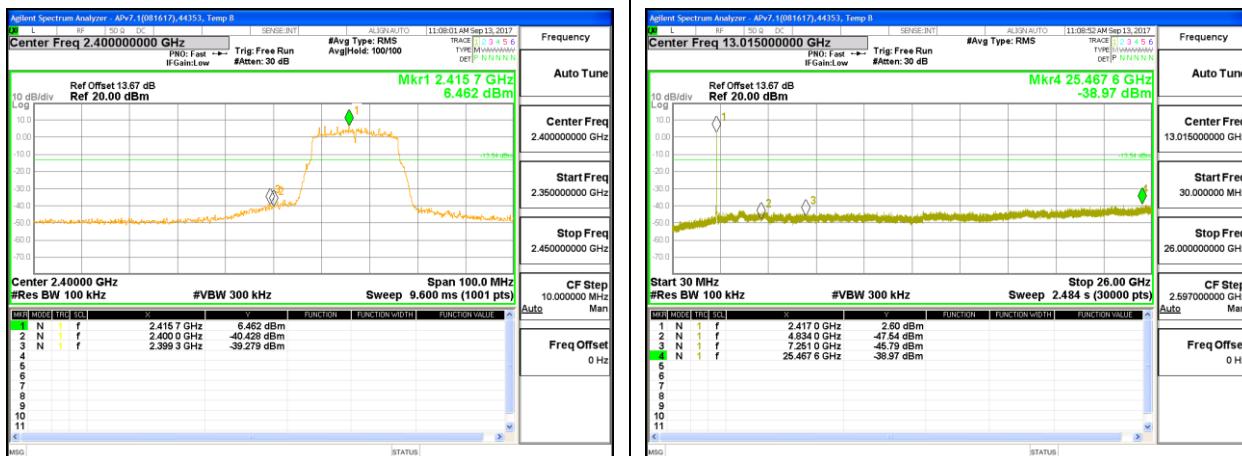


LOW CHANNEL 2 BANDEDGE


OUT-OF-BAND LOW CHANNEL 2

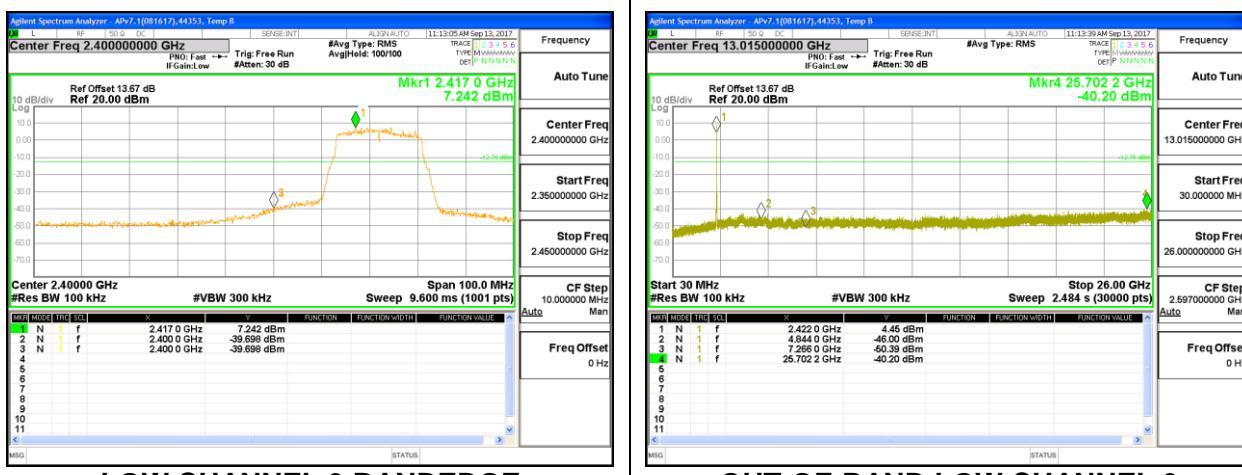


LOW CHANNEL 3 BANDEDGE

OUT-OF-BAND LOW CHANNEL 3

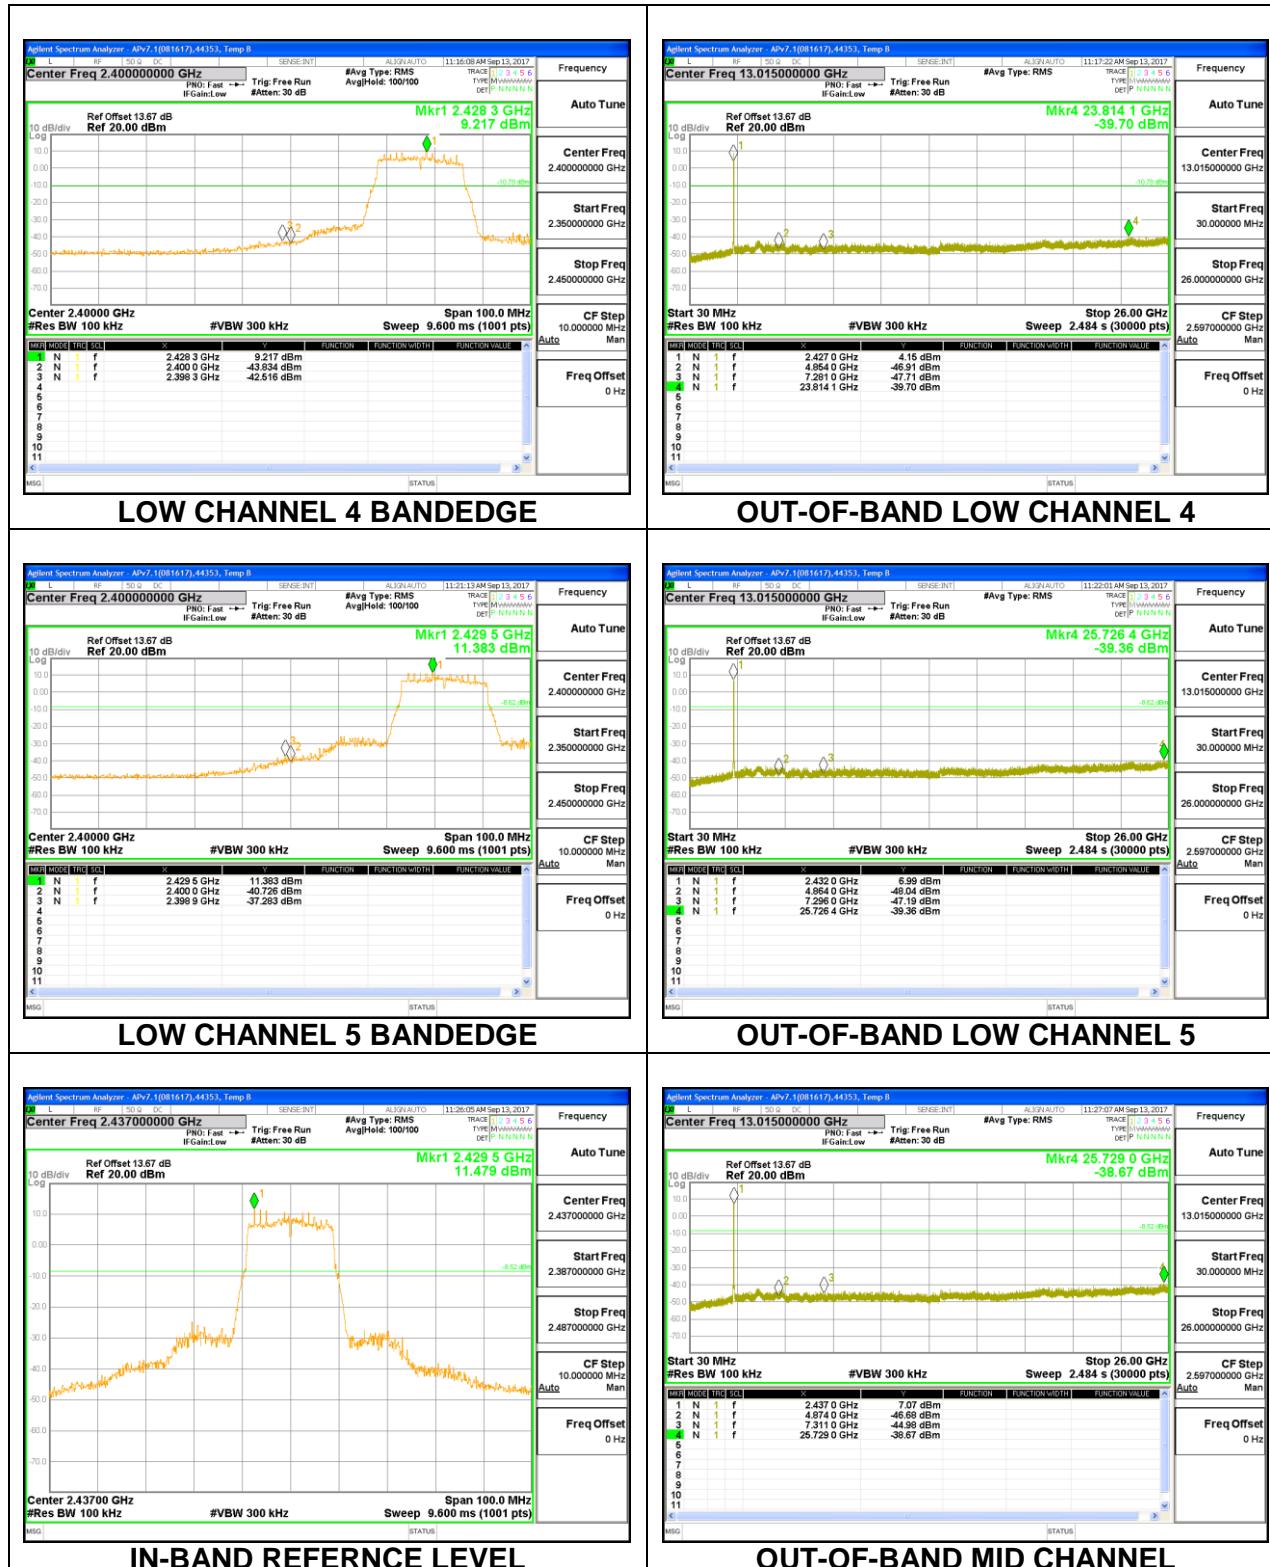


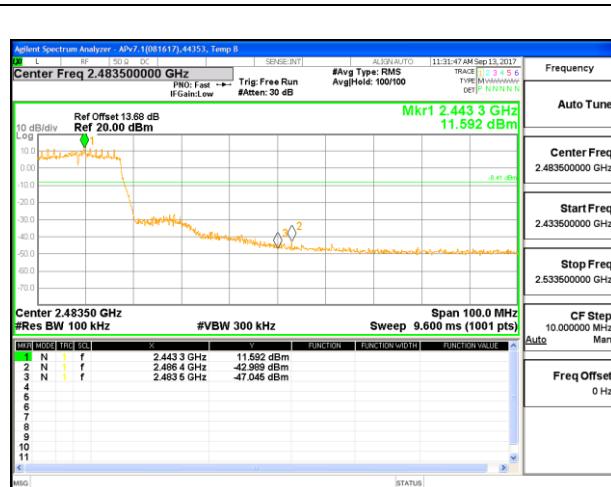


## HIGH CHANNEL 7 BANDEDGE

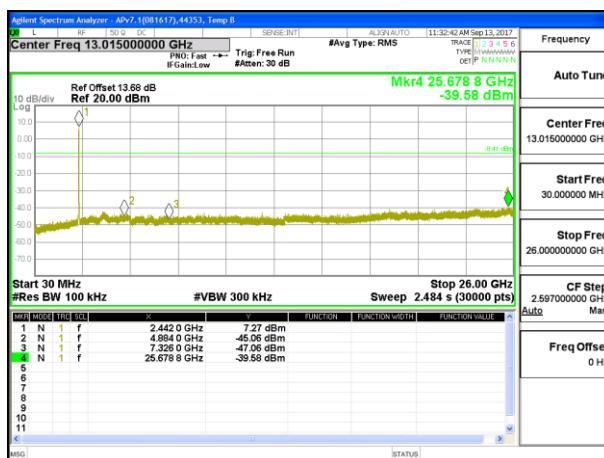


OUT-OF-BAND HIGH CHANNEL 7

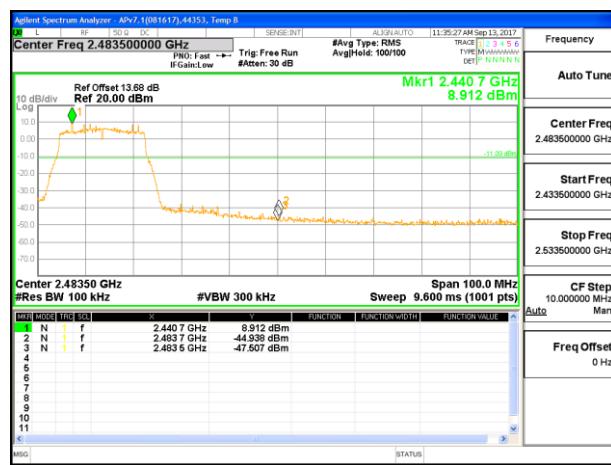


## HIGH CHANNEL 8 BANDEDGE

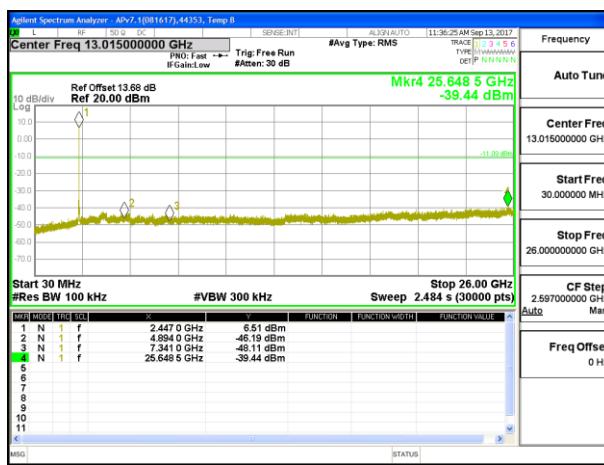

## OUT-OF-BAND HIGH CHANNEL 8

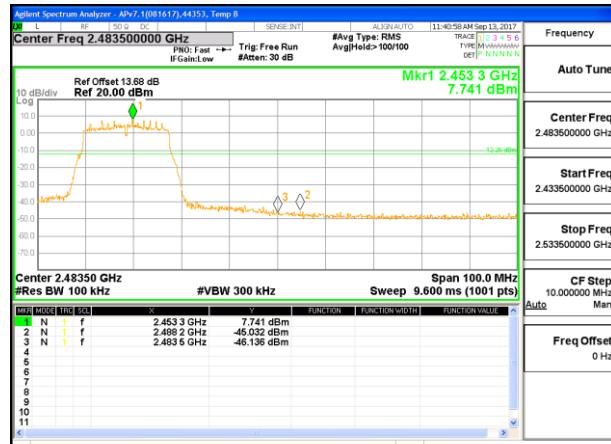

## HIGH CHANNEL 8 BANDEDGE

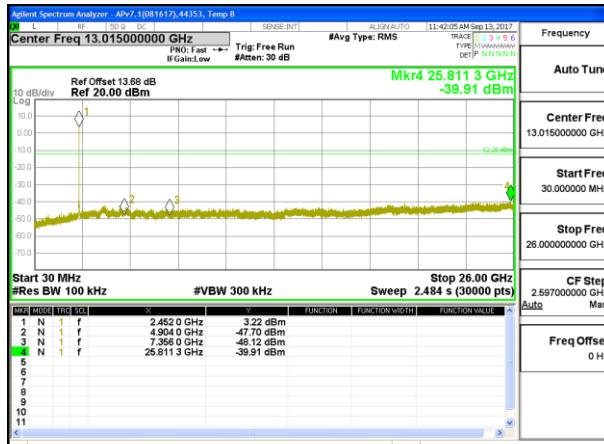

## OUT-OF-BAND HIGH CHANNEL 9

