


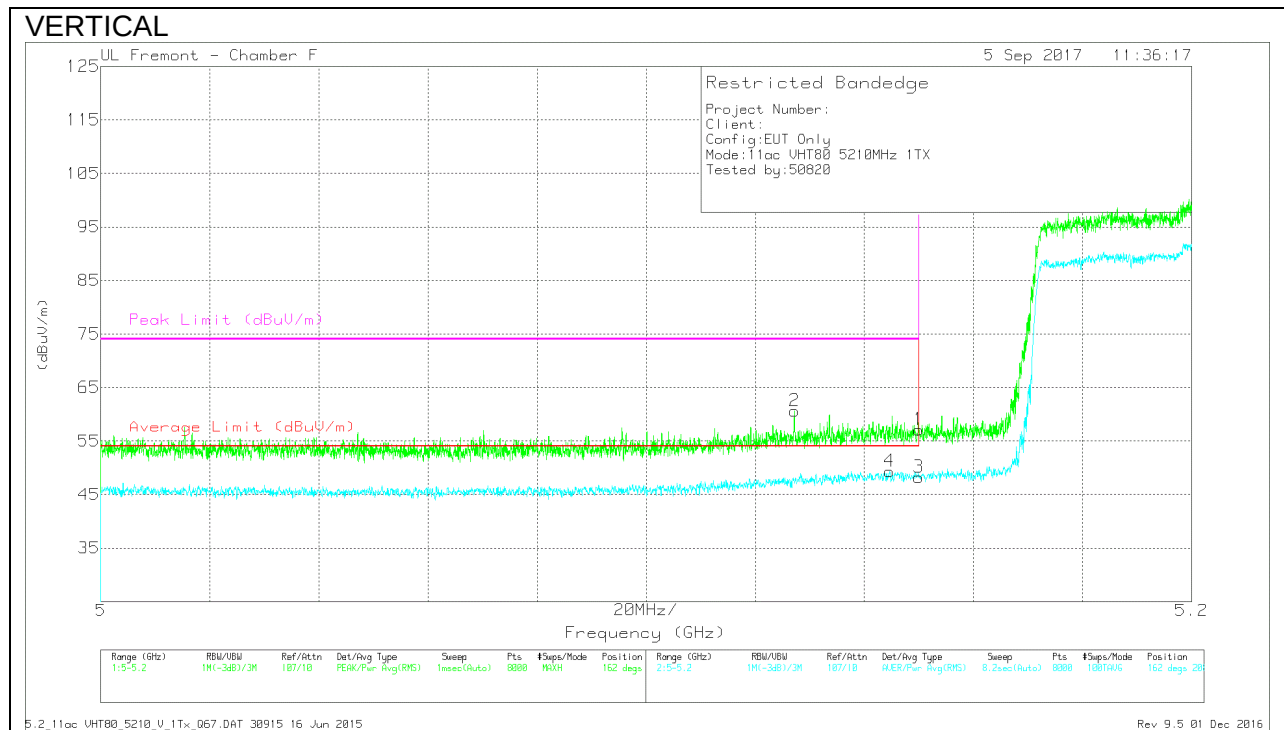


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	41.31	Pk	34.5	-18.7	57.11	-	-	74	-16.89	162	208	V
2	* 5.127	44.82	Pk	34.4	-18.6	60.62	-	-	74	-13.38	162	208	V
3	* 5.15	32.44	RMS	34.5	-18.7	48.24	54	-5.76	-	-	162	208	V
4	* 5.145	33.55	RMS	34.4	-18.6	49.35	54	-4.65	-	-	162	208	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

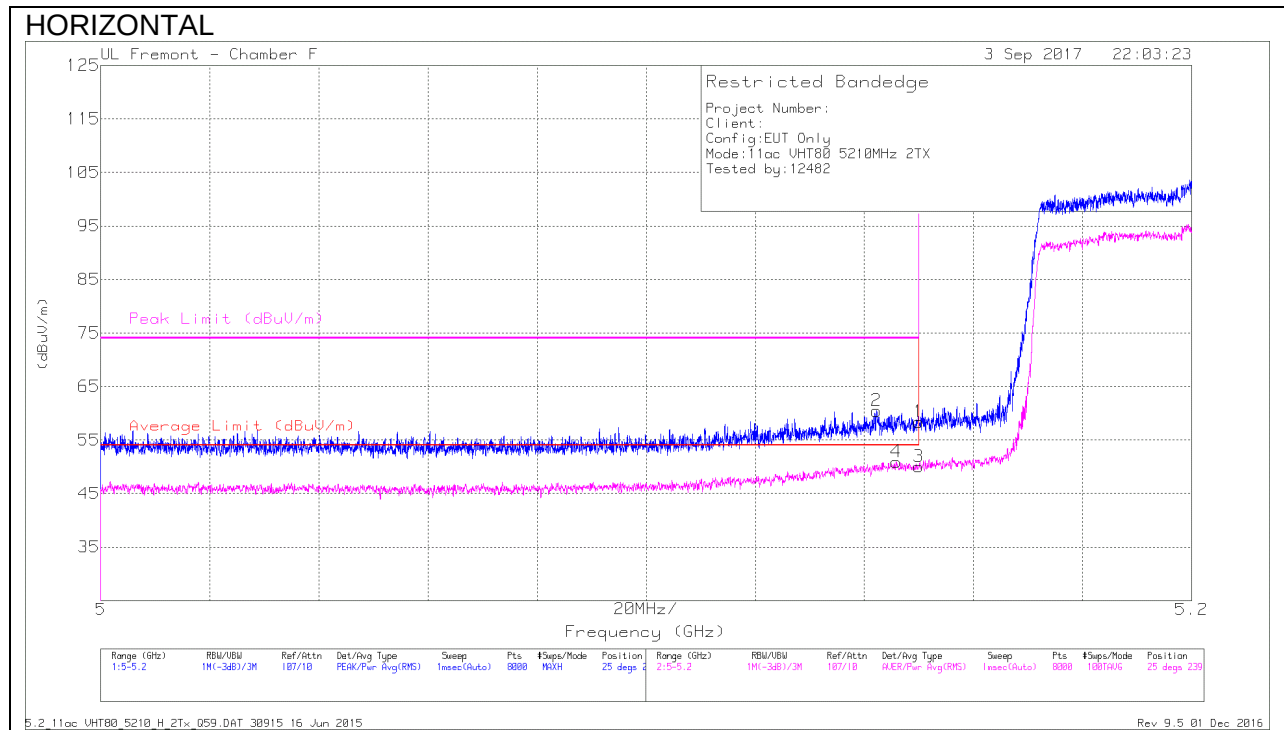
2TX Antenna A + Antenna B CDD MODE**BANDEDGE (MID CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	42.58	Pk	34.5	-18.7	0	58.38	-	-	74	-15.62	25	239	H
2	* 5.142	44.65	Pk	34.4	-18.6	0	60.45	-	-	74	-13.55	25	239	H
3	* 5.15	34.04	RMS	34.5	-18.7	.19	50.03	54	-3.97	-	-	25	239	H
4	* 5.146	35	RMS	34.4	-18.7	.19	50.89	54	-3.11	-	-	25	239	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

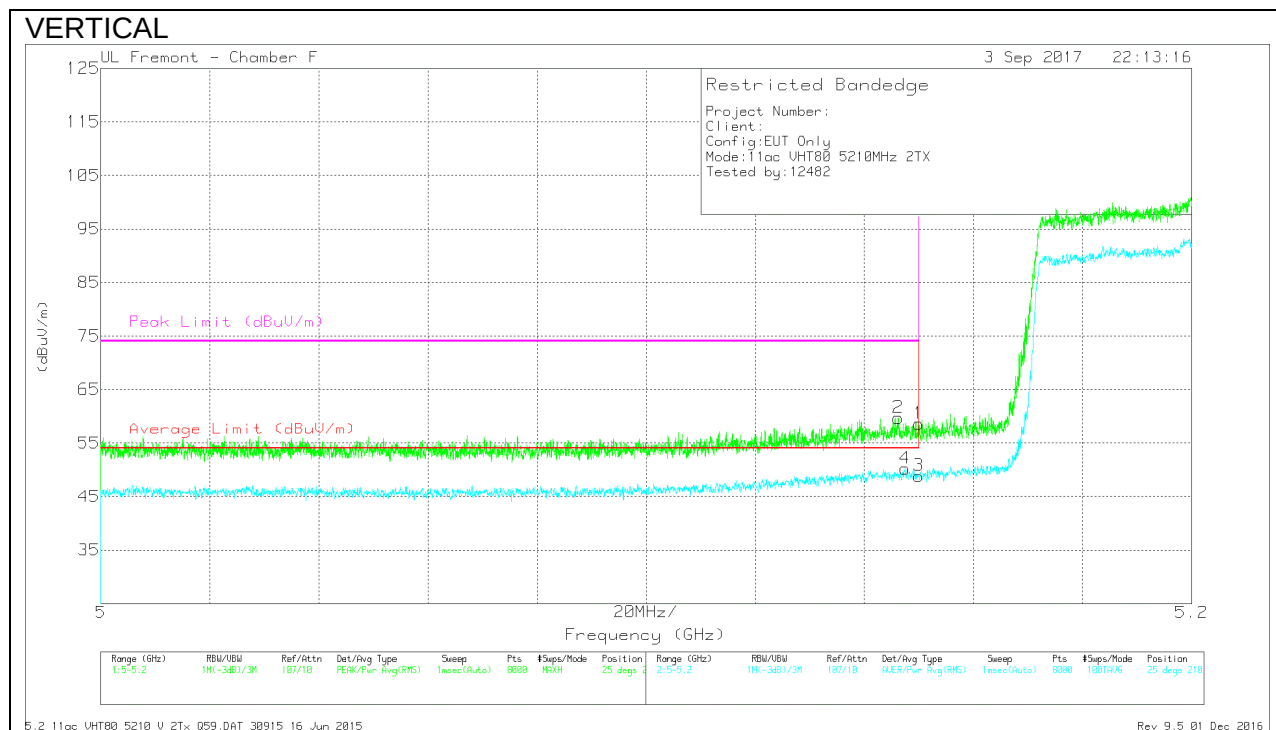

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	42.82	Pk	34.5	-18.7	0	58.62	-	-	74	-15.38	25	210	V
2	* 5.146	44.01	Pk	34.4	-18.7	0	59.71	-	-	74	-14.29	25	210	V
3	* 5.15	32.88	RMS	34.5	-18.7	.19	48.87	54	-5.13	-	-	25	210	V
4	* 5.147	34.35	RMS	34.4	-18.7	.19	50.24	54	-3.76	-	-	25	210	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

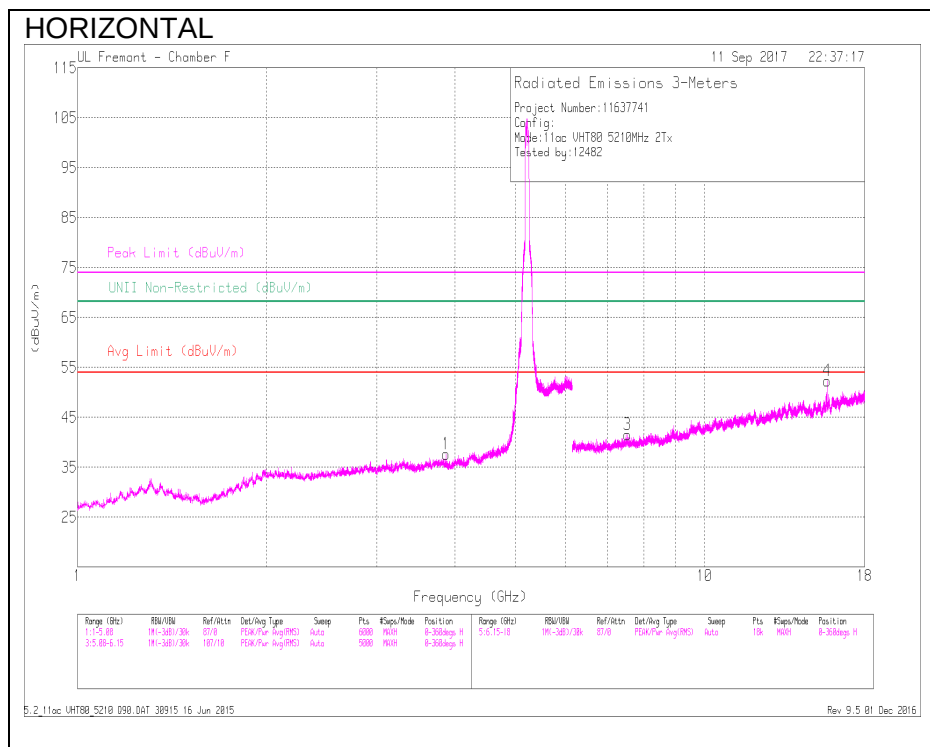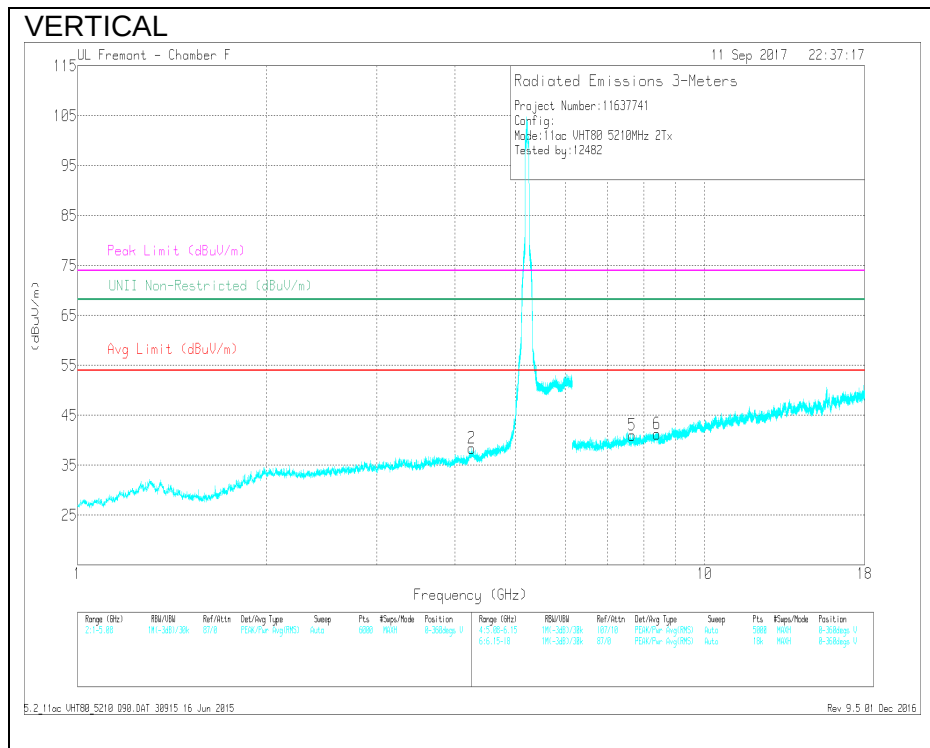

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meas. Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.865	39.03	PK-U	33.3	-28.7	0	43.63	-	-	74	-30.37	-	-	213	196	H
	* 3.868	27.65	ADR	33.3	-28.8	.19	32.34	54	-21.66	-	-	-	-	213	196	H
2	* 4.251	37.72	PK-U	33.6	-26.7	0	44.62	-	-	74	-29.38	-	-	331	101	V
	* 4.253	26.52	ADR	33.6	-26.7	.19	33.61	54	-20.39	-	-	-	-	331	101	V
3	* 7.539	36.83	PK-U	36.1	-24.5	0	48.43	-	-	74	-25.57	-	-	69	275	H
	* 7.54	25.3	ADR	36.1	-24.5	.19	37.09	54	-16.91	-	-	-	-	69	275	H
4	* 15.683	36.71	PK-U	40.7	-22.5	0	54.91	-	-	74	-19.09	-	-	182	305	H
	* 15.682	25.28	ADR	40.6	-22.5	.19	43.57	54	-10.43	-	-	-	-	182	305	H
5	* 7.666	36.8	PK-U	36.1	-24.8	0	48.1	-	-	74	-25.9	-	-	188	244	V
	* 7.664	25.44	ADR	36.1	-24.8	.19	36.93	54	-17.07	-	-	-	-	188	244	V
6	* 8.401	36.04	PK-U	35.9	-23.6	0	48.34	-	-	74	-25.66	-	-	246	202	V
	* 8.401	24.92	ADR	35.9	-23.6	.19	37.41	54	-16.59	-	-	-	-	246	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.1.4. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX Antenna A

BANDEDGE (HIGH CHANNEL)

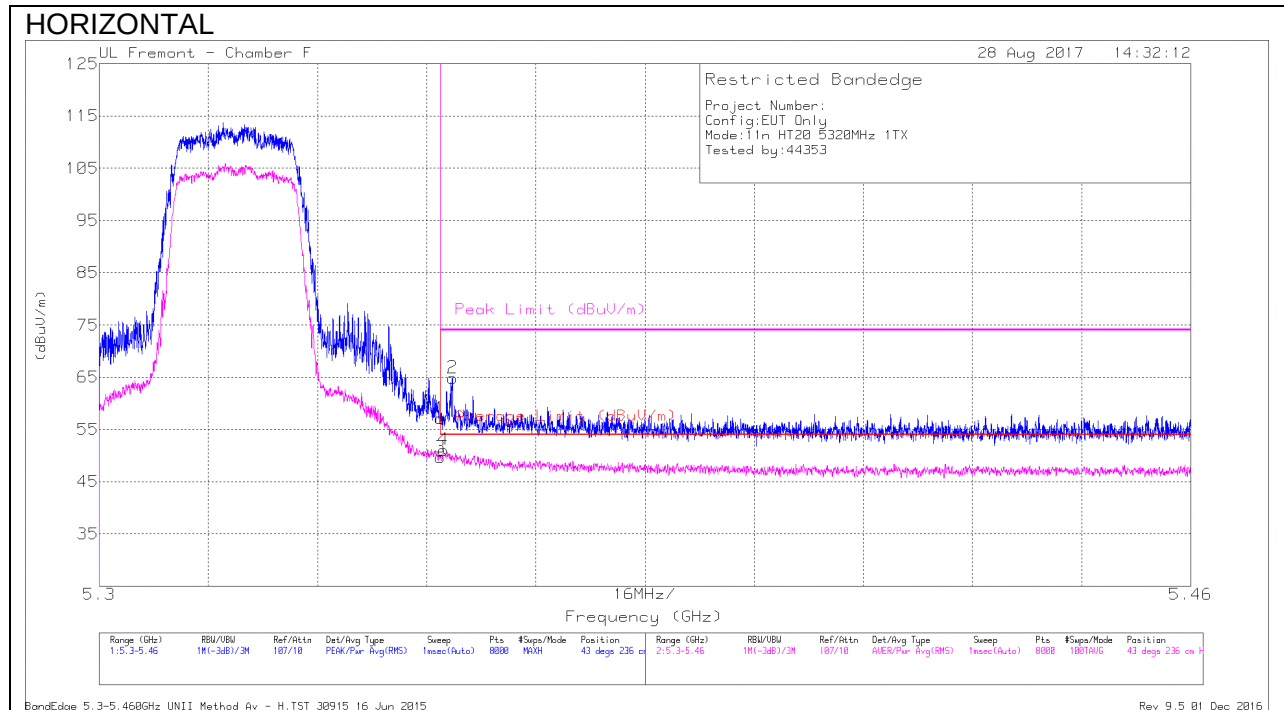


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.35	41.15	Pk	34.7	-18.7	57.15	-	-	74	-16.85	43	236	H
2	* 5.352	48.88	Pk	34.7	-18.7	64.88	-	-	74	-9.12	43	236	H
3	* 5.35	33.69	RMS	34.7	-18.7	49.69	54	-4.31	-	-	43	236	H
4	* 5.35	35.1	RMS	34.7	-18.7	51.1	54	-2.9	-	-	43	236	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

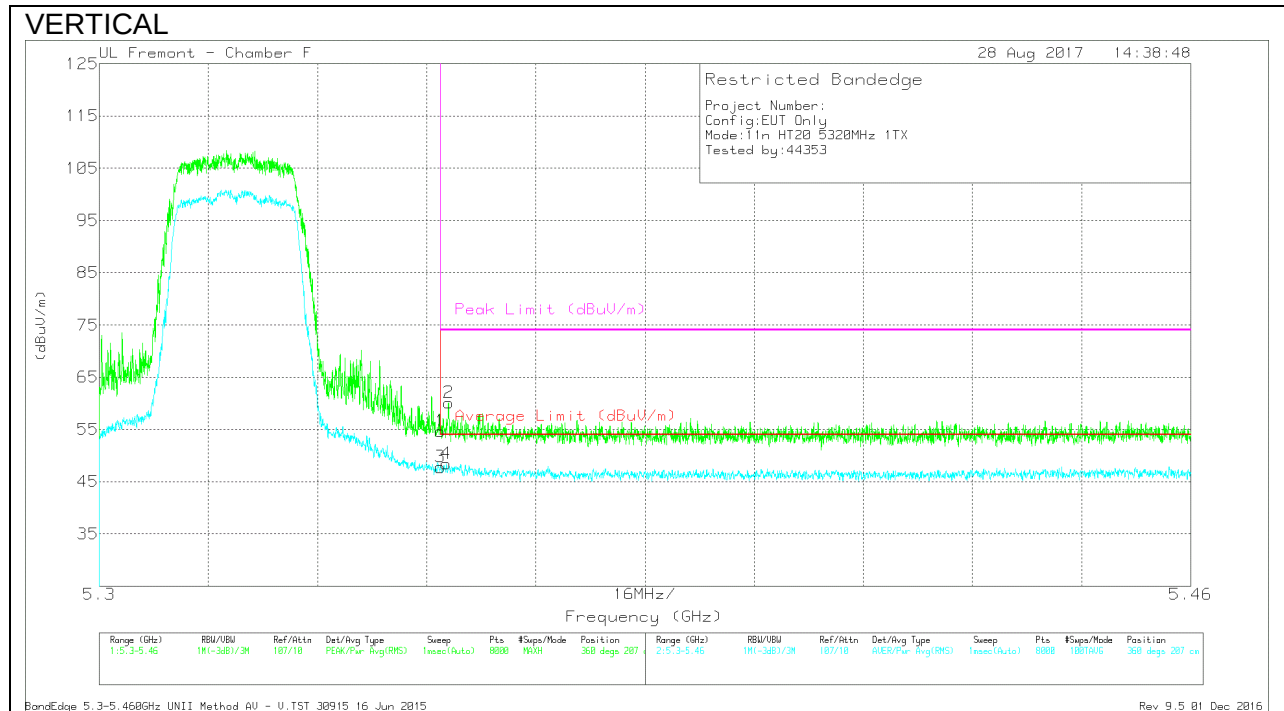


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.35	38.64	Pk	34.7	-18.7	54.64	-	-	74	-19.36	360	207	V
2	* 5.351	44.07	Pk	34.7	-18.7	60.07	-	-	74	-13.93	360	207	V
3	* 5.35	31.75	RMS	34.7	-18.7	47.75	54	-6.25	-	-	360	207	V
4	* 5.351	32.41	RMS	34.7	-18.7	48.41	54	-5.59	-	-	360	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

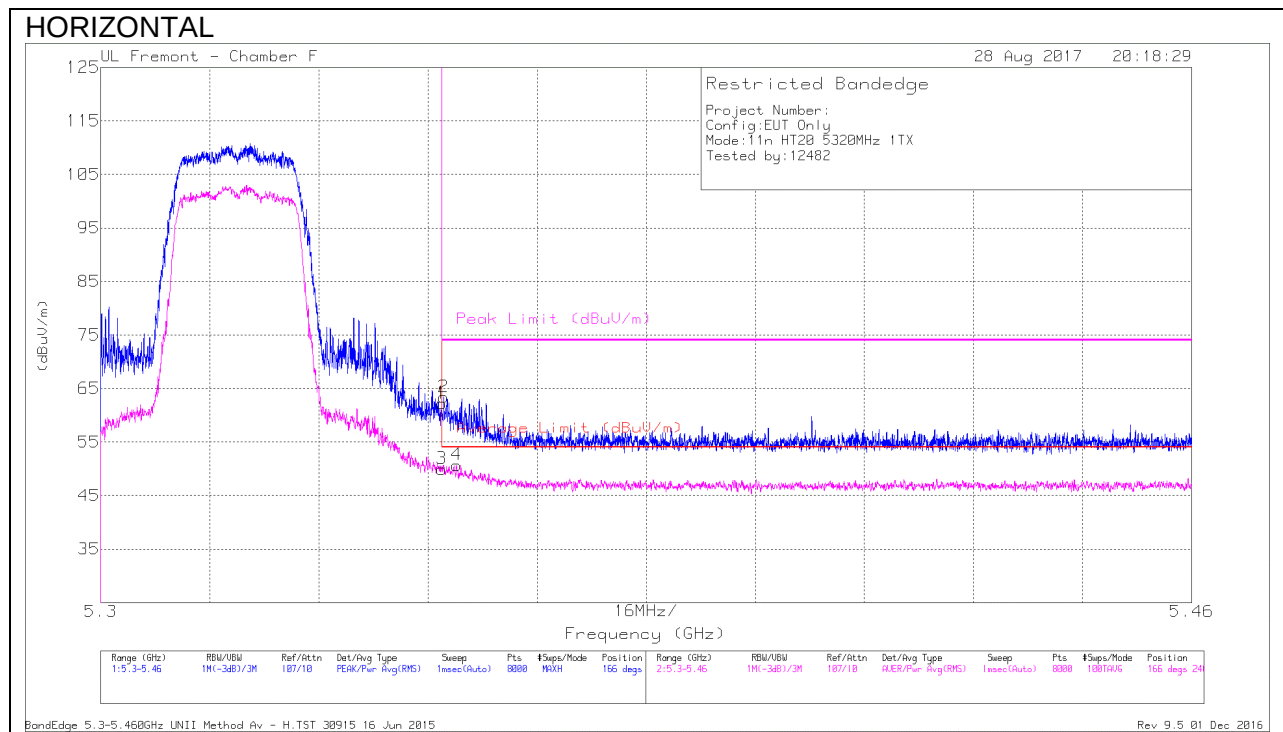
1TX Antenna B**BANDEDGE (HIGH CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.35	46.24	Pk	34.7	-18.7	62.24	-	-	74	-11.76	166	240	H
2	* 5.35	47.4	Pk	34.7	-18.7	63.4	-	-	74	-10.6	166	240	H
3	* 5.35	33.97	RMS	34.7	-18.7	49.97	54	-4.03	-	-	166	240	H
4	* 5.352	34.7	RMS	34.7	-18.7	50.7	54	-3.3	-	-	166	240	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

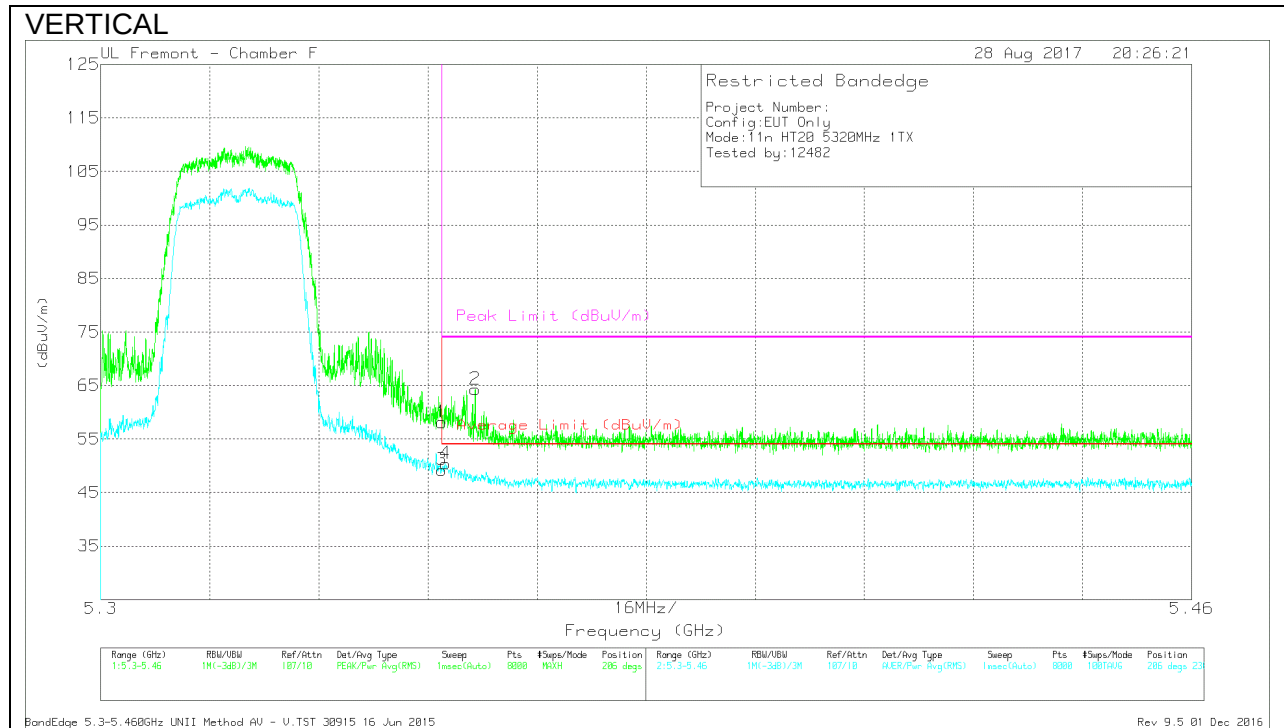


Marker	Frequ ncy (GHz)	Meter Readin g (dBuV)	Det	AF T119 (dB/m)	Amp/C bl/Filtr/ Pad (dB)	Correct ed Readin g (dBuV/ m)	Averag e Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth h (Degs)	Height (cm)	Polarit y
1	* 5.35	42.14	Pk	34.7	-18.7	58.14	-	-	74	-15.86	206	236	V
2	* 5.355	48.2	Pk	34.7	-18.6	64.3	-	-	74	-9.7	206	236	V
3	* 5.35	33.24	RMS	34.7	-18.7	49.24	54	-4.76	-	-	206	236	V
4	* 5.351	34.41	RMS	34.7	-18.7	50.41	54	-3.59	-	-	206	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

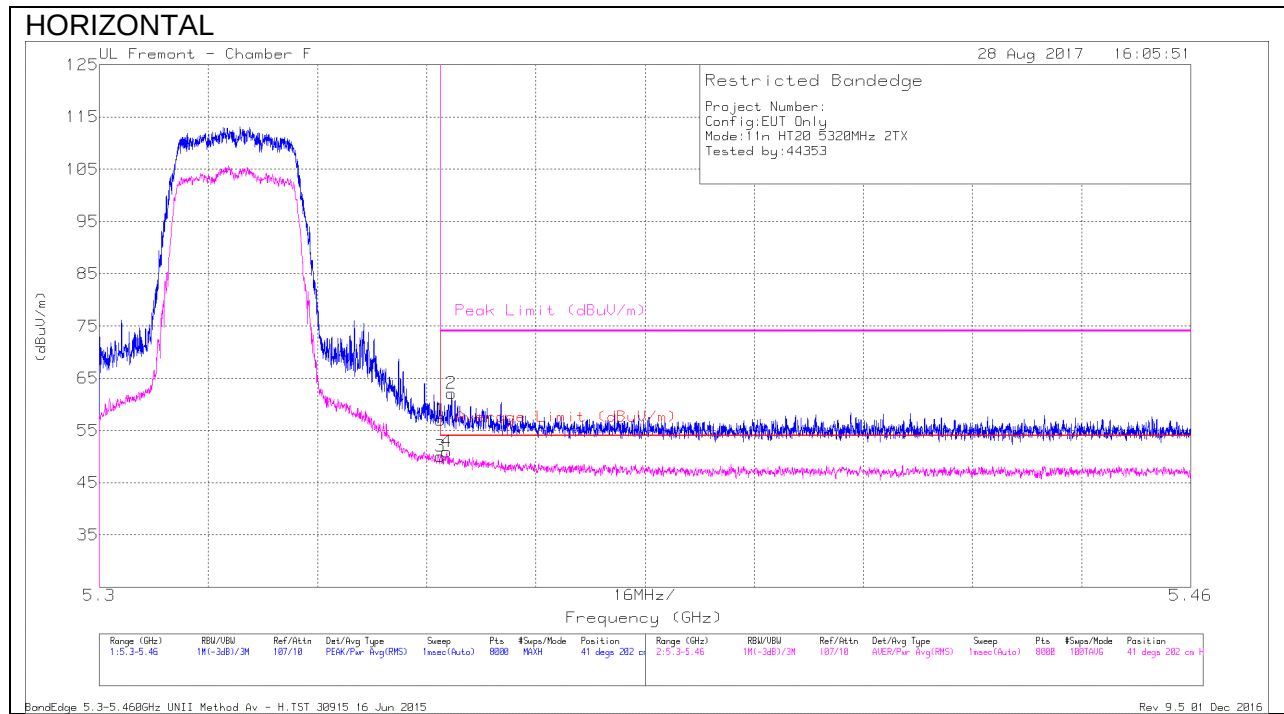
2TX Antenna A + Antenna B CDD MODE**BANDEDGE (HIGH CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.35	41.01	Pk	34.7	-18.7	57.01	-	-	74	-16.99	41	202	H
2	* 5.352	46.08	Pk	34.7	-18.7	62.08	-	-	74	-11.92	41	202	H
3	* 5.35	34.05	RMS	34.7	-18.7	50.05	54	-3.95	-	-	41	202	H
4	* 5.351	34.91	RMS	34.7	-18.7	50.91	54	-3.09	-	-	41	202	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

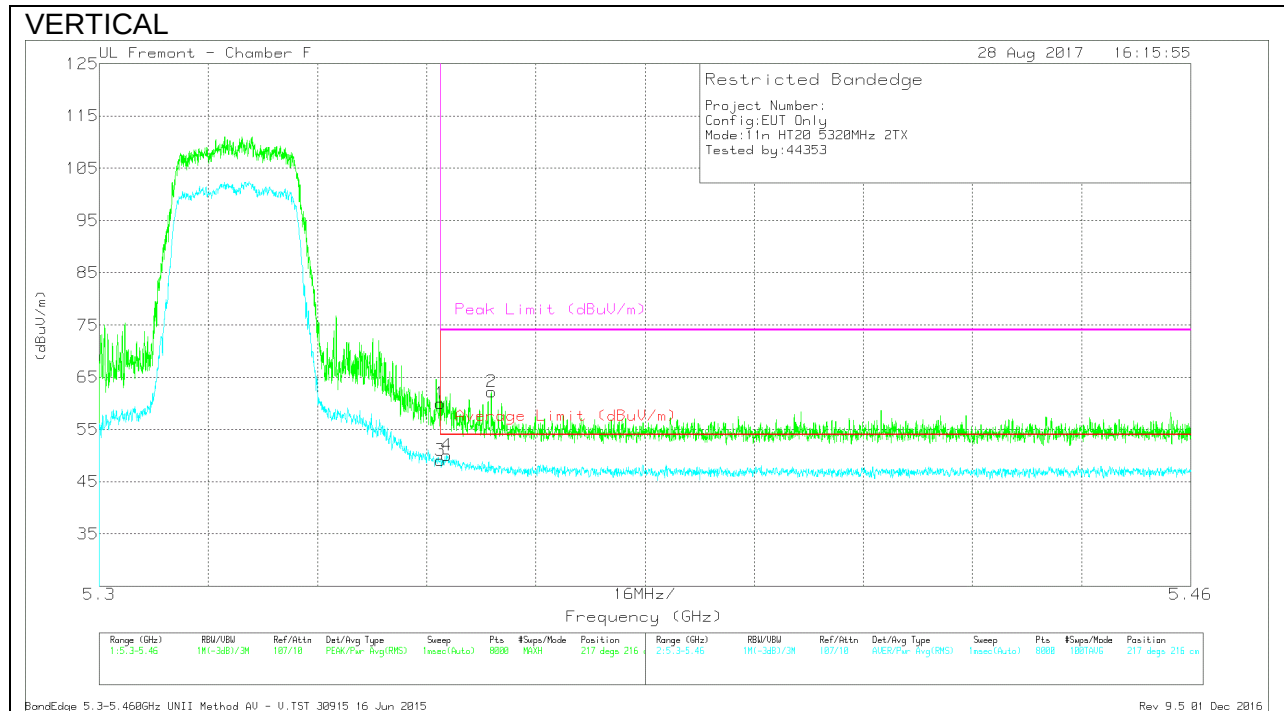

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.35	43.95	Pk	34.7	-18.7	59.95	-	-	74	-14.05	217	216	V
2	* 5.357	46.16	Pk	34.7	-18.6	62.26	-	-	74	-11.74	217	216	V
3	* 5.35	33.01	RMS	34.7	-18.7	49.01	54	-4.99	-	-	217	216	V
4	* 5.351	34.01	RMS	34.7	-18.7	50.01	54	-3.99	-	-	217	216	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

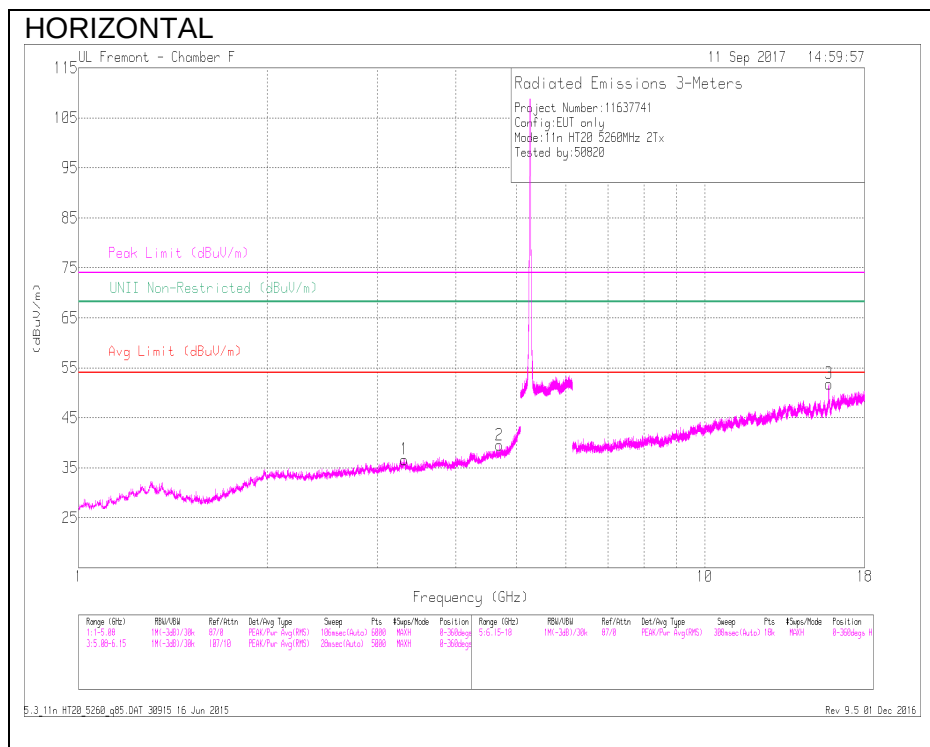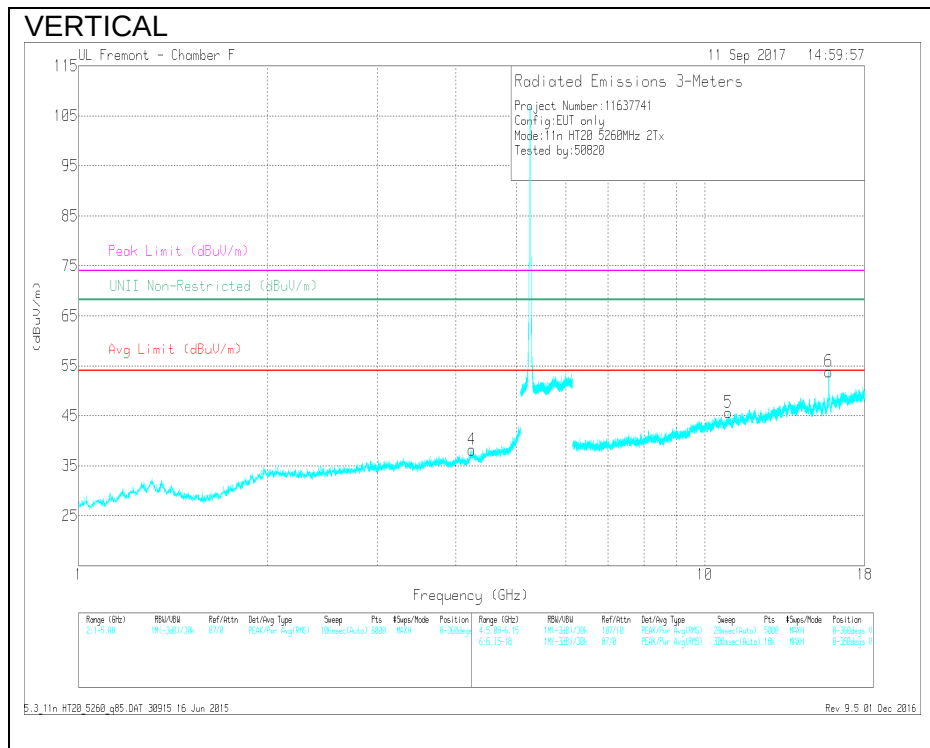

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	3.314	41.18	PK-U	33.6	-29.7	45.08	-	-	-	-	68.2	-23.12	119	245	H
2	* 4.696	39.14	PK-U	34.1	-27.3	45.94	-	-	74	-28.06	-	-	227	132	H
	* 4.697	27.61	ADR	34.1	-27.3	34.41	54	-19.59	-	-	-	-	227	132	H
4	* 4.245	37.85	PK-U	33.6	-26.8	44.65	-	-	74	-29.35	-	-	46	310	V
	* 4.244	26.6	ADR	33.6	-26.8	33.4	54	-20.6	-	-	-	-	46	310	V
3	* 15.78	41.34	PK-U	42	-22.6	60.74	-	-	74	-13.26	-	-	324	187	H
	* 15.781	28.49	ADR	42	-22.5	47.99	54	-6.01	-	-	-	-	324	187	H
5	* 10.9	35.03	PK-U	37.8	-21.6	51.23	-	-	74	-22.77	-	-	306	201	V
	* 10.9	24.33	ADR	37.8	-21.6	40.53	54	-13.47	-	-	-	-	306	201	V
6	* 15.774	43.67	PK-U	41.9	-22.5	63.07	-	-	74	-10.93	-	-	37	184	V
	* 15.777	30.72	ADR	41.9	-22.5	50.12	54	-3.88	-	-	-	-	37	184	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

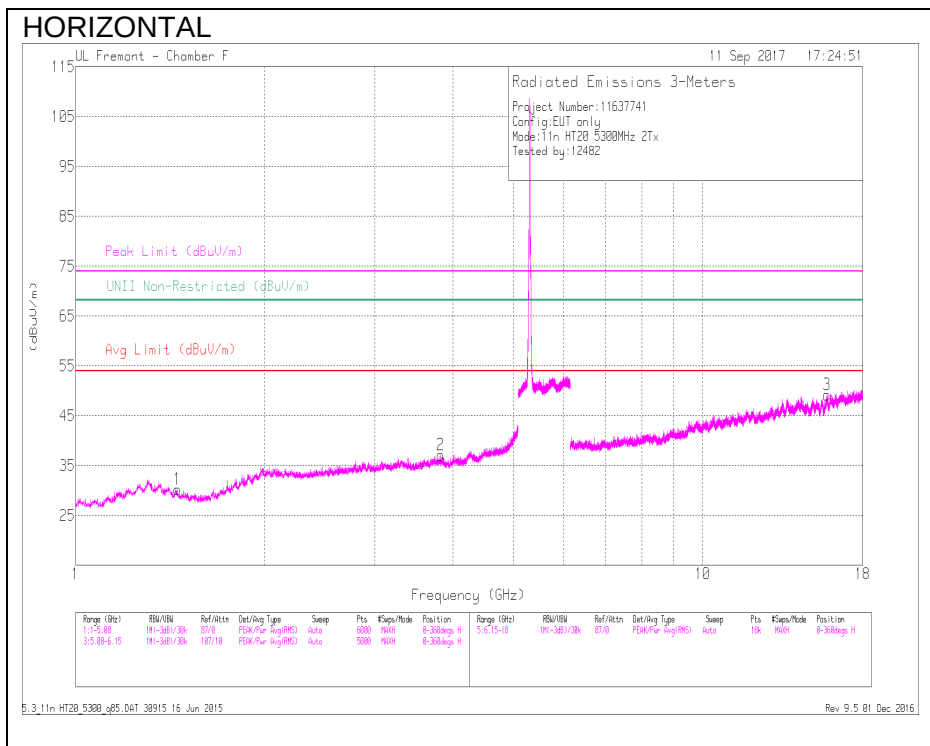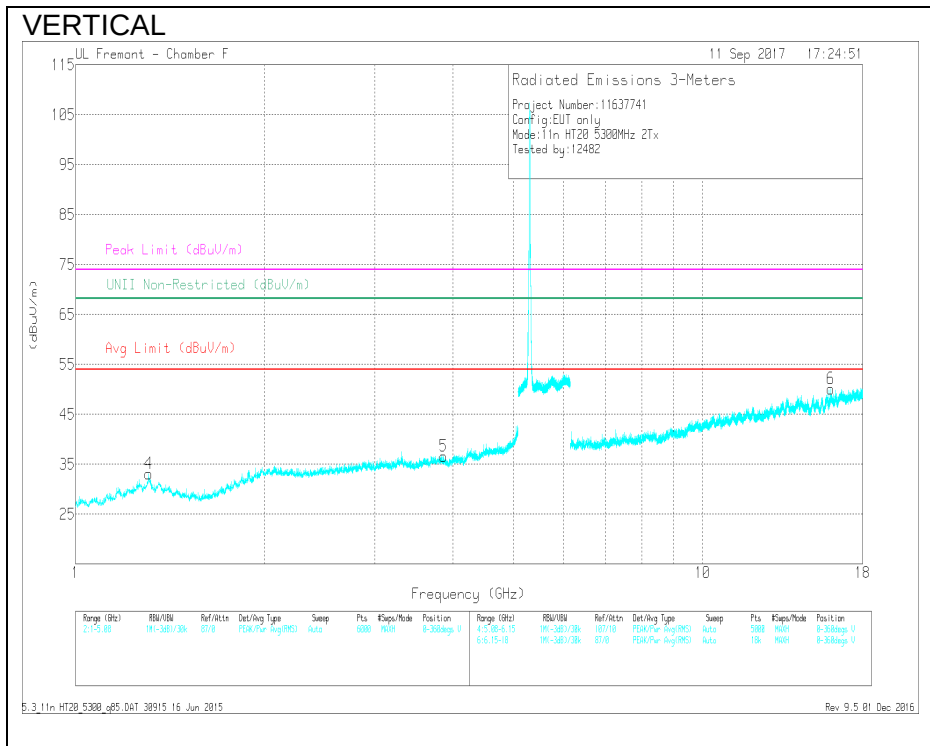

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	Corrected Reading (dBUV/m)	Avg Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	UNII Non-Restricted (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.453	41.34	PK-U	28.4	-31.9	37.84	-	-	74	-36.16	-	-	357	101	H
	* 1.453	29.68	ADR	28.4	-31.9	26.18	54	-27.82	-	-	-	-	357	101	H
2	* 3.823	39.37	PK-U	33.3	-28.8	43.87	-	-	74	-30.13	-	-	156	176	H
	* 3.823	28.09	ADR	33.3	-28.8	32.59	54	-21.41	-	-	-	-	156	176	H
4	* 1.31	40.96	PK-U	30	-31.4	39.56	-	-	74	-34.44	-	-	249	202	V
	* 1.308	29.62	ADR	30	-31.5	28.12	54	-25.88	-	-	-	-	249	202	V
5	* 3.864	38.93	PK-U	33.3	-28.6	43.63	-	-	74	-30.37	-	-	191	186	V
	* 3.864	27.9	ADR	33.3	-28.6	32.6	54	-21.4	-	-	-	-	191	186	V
3	* 15.796	36.73	PK-U	42.2	-22.5	56.43	-	-	74	-17.57	-	-	301	253	H
	* 15.793	25.22	ADR	42.2	-22.5	44.92	54	-9.08	-	-	-	-	301	253	H
6	* 16.005	36.89	PK-U	41.9	-22	56.79	-	-	74	-17.21	-	-	81	337	V
	* 16.005	25.16	ADR	41.9	-22	45.06	54	-8.94	-	-	-	-	81	337	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

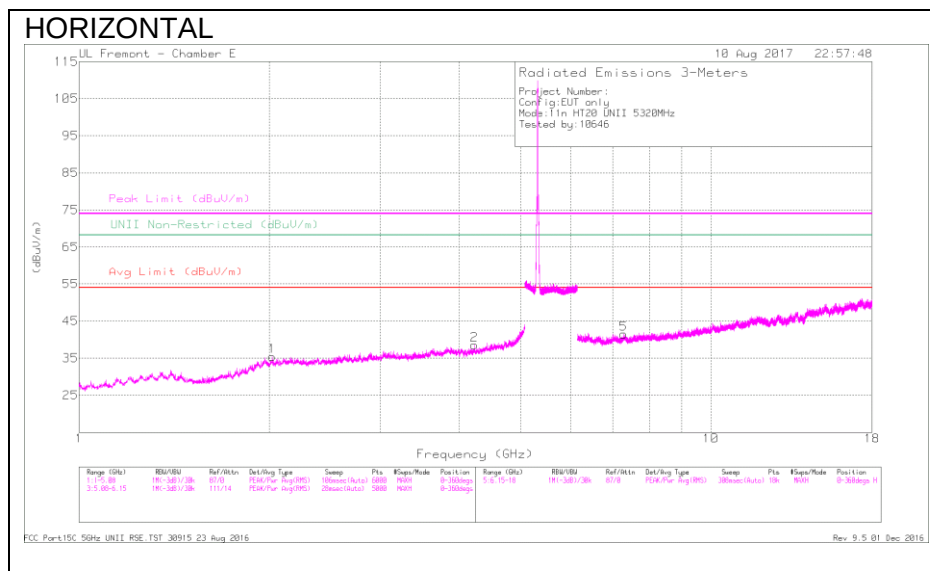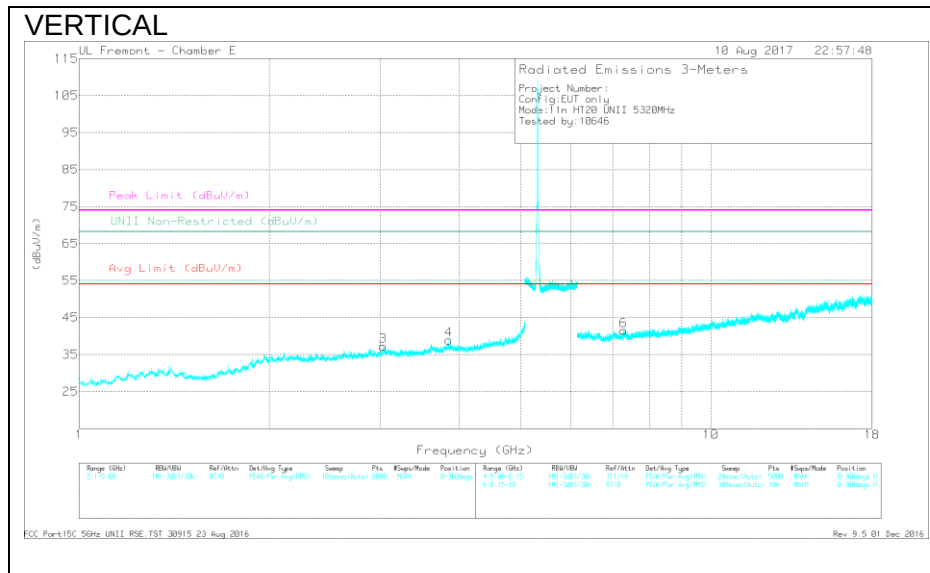

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.224	41.89	PK-U	33.7	-29.5	46.09	-	-	74	-27.91	-	-	127	200	H
	* 4.224	29.69	ADR	33.7	-29.5	33.89	54	-20.11	-	-	-	-	127	200	H
4	* 3.849	40.84	PK-U	33.7	-29.4	45.14	-	-	74	-28.86	-	-	274	191	V
	* 3.852	29.92	ADR	33.7	-29.4	34.22	54	-19.78	-	-	-	-	274	191	V
5	* 7.272	38.56	PK-U	36	-26	48.56	-	-	74	-25.44	-	-	163	342	H
	* 7.271	27.26	ADR	36	-26	37.26	54	-16.74	-	-	-	-	163	342	H
6	* 7.274	38.37	PK-U	36	-25.9	48.47	-	-	74	-25.53	-	-	326	211	V
	* 7.273	27.15	ADR	36	-25.9	37.25	54	-16.75	-	-	-	-	326	211	V
1	2.023	44.2	PK-U	32.1	-33.4	42.9	-	-	-	-	68.2	-25.3	305	129	H
3	3.028	41.48	PK-U	32.9	-30.6	43.78	-	-	-	-	68.2	-24.42	77	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.1.5. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX Antenna A

BANDEDGE (HIGH CHANNEL)

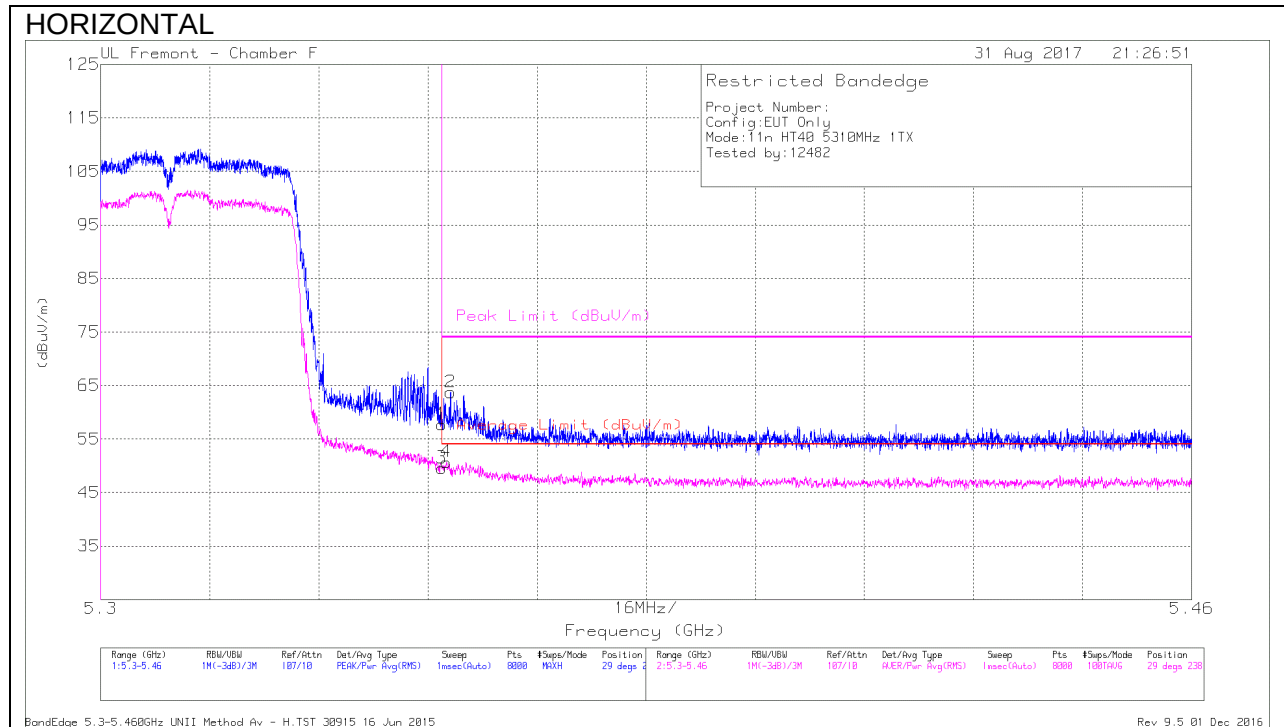


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.71	Pk	34.7	-18.7	0	57.71	-	-	74	-16.29	29	238	H
2	* 5.351	47.75	Pk	34.7	-18.7	0	63.75	-	-	74	-10.25	29	238	H
3	* 5.35	33.47	RMS	34.7	-18.7	.1	49.57	54	-4.43	-	-	29	238	H
4	* 5.351	34.6	RMS	34.7	-18.7	.1	50.7	54	-3.3	-	-	29	238	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

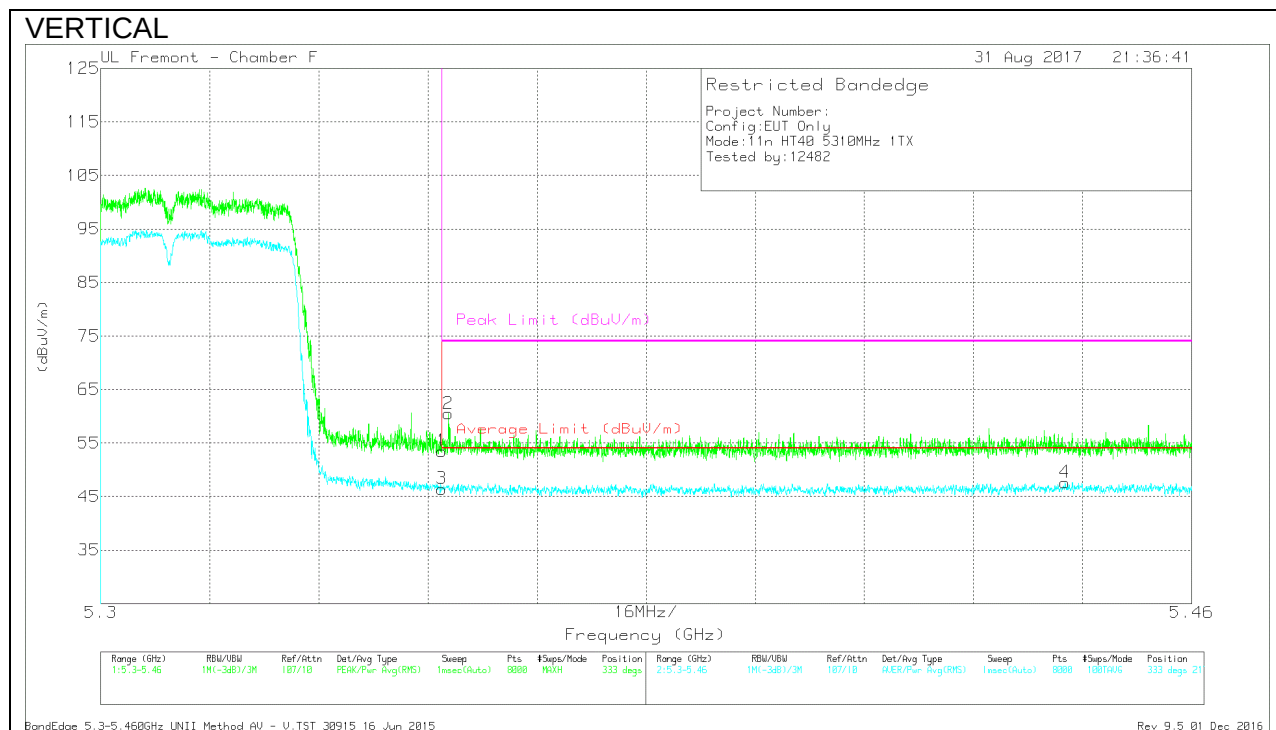


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.35	37.49	Pk	34.7	-18.7	0	53.49	-	-	74	-20.51	333	217	V
2	* 5.351	44.48	Pk	34.7	-18.7	0	60.48	-	-	74	-13.52	333	217	V
3	* 5.35	30.34	RMS	34.7	-18.7	.1	46.44	54	-7.56	-	-	333	217	V
4	* 5.441	31.41	RMS	34.8	-18.7	.1	47.61	54	-6.39	-	-	333	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

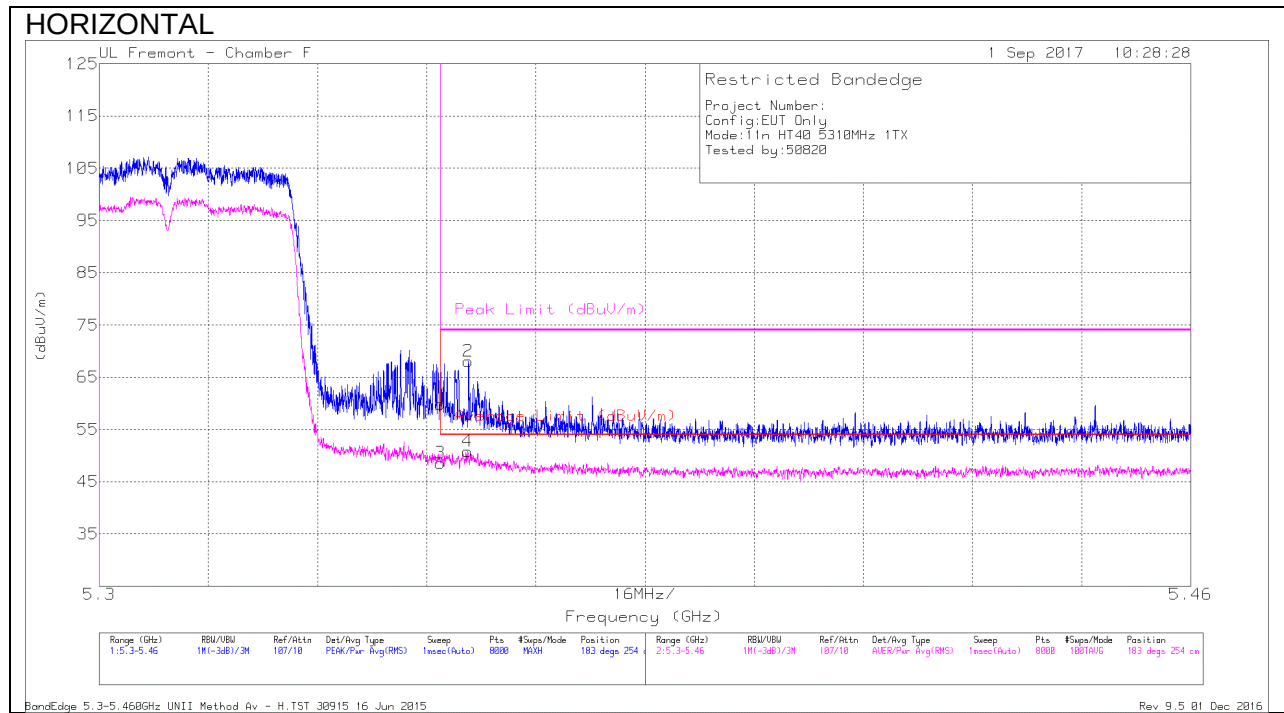
1TX Antenna B**BANDEDGE (HIGH CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.8	Pk	34.7	-18.7	59.8	-	-	74	-14.2	183	254	H
2	* 5.354	51.89	Pk	34.7	-18.6	67.99	-	-	74	-6.01	183	254	H
3	* 5.35	32.57	RMS	34.7	-18.7	48.57	54	-5.43	-	-	183	254	H
4	* 5.354	34.68	RMS	34.7	-18.6	50.78	54	-3.22	-	-	183	254	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

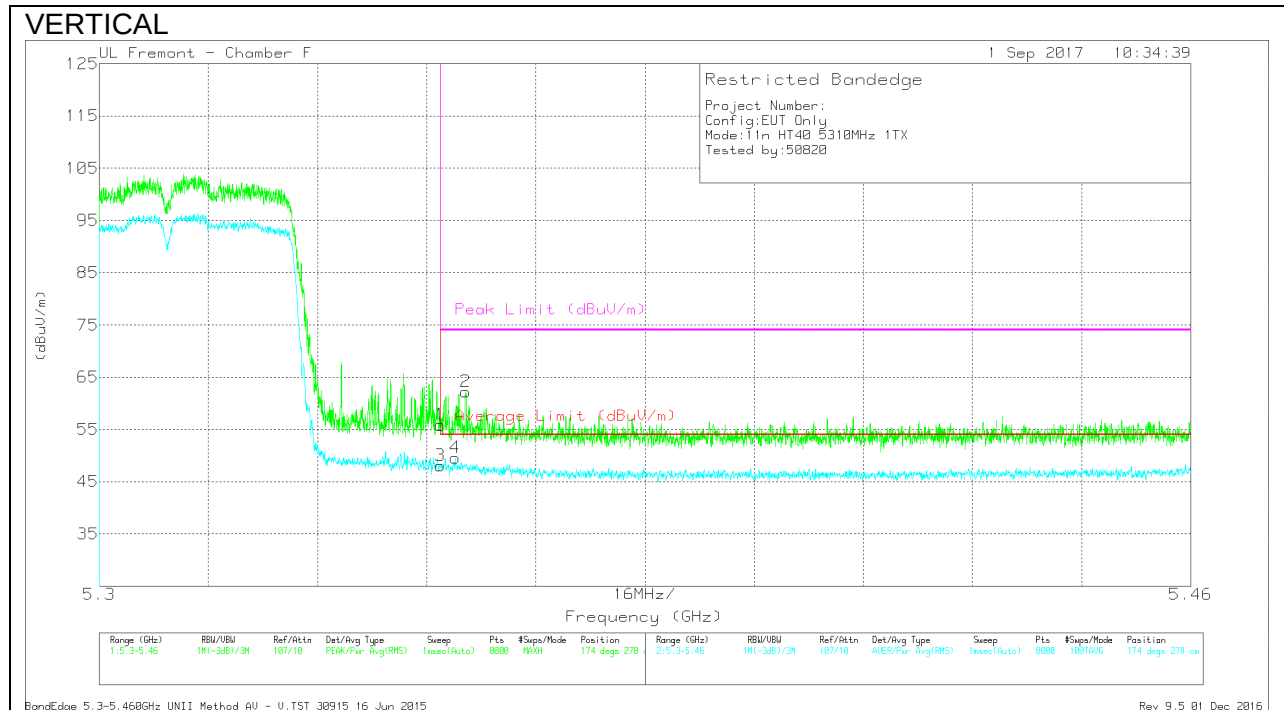

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.82	Pk	34.7	-18.7	55.82	-	-	74	-18.18	174	278	V
2	* 5.354	46.13	Pk	34.7	-18.6	62.23	-	-	74	-11.77	174	278	V
3	* 5.35	32.01	RMS	34.7	-18.7	48.01	54	-5.99	-	-	174	278	V
4	* 5.352	33.54	RMS	34.7	-18.7	49.54	54	-4.46	-	-	174	278	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

11.1.6. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX Antenna A

BANDEDGE (MID CHANNEL)

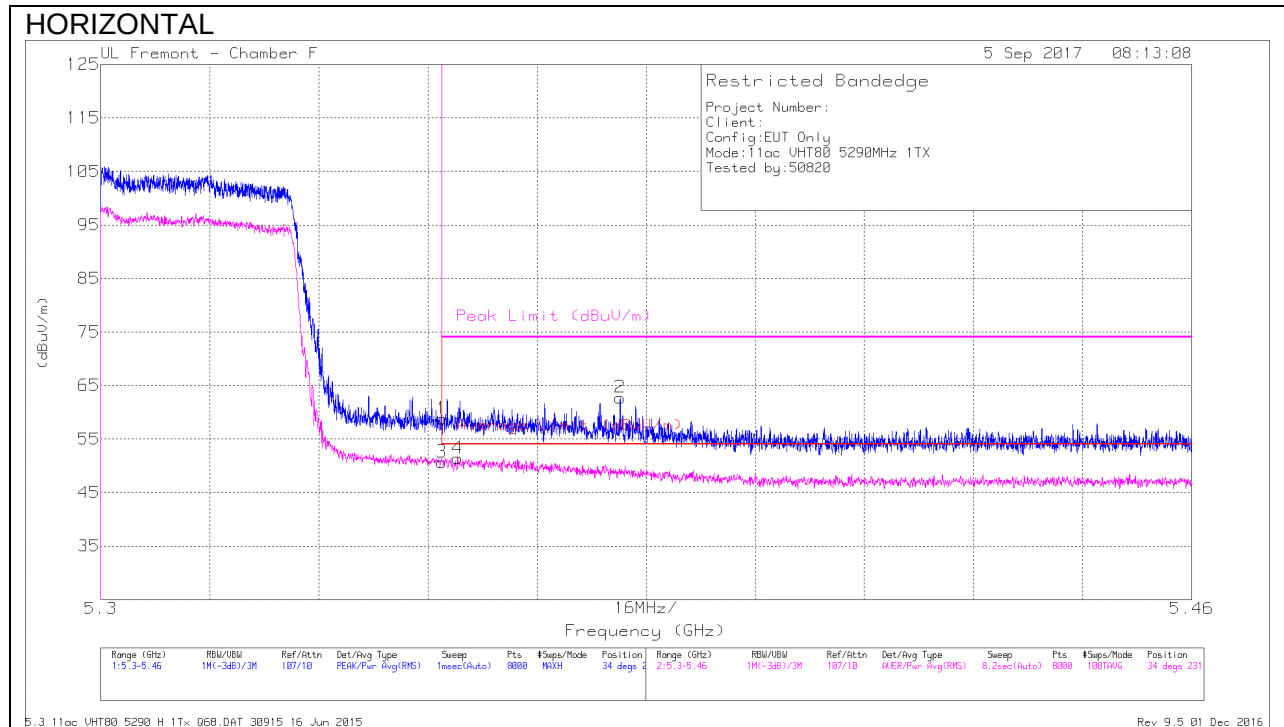


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.8	Pk	34.7	-18.7	0	58.8	-	-	74	-15.2	34	231	H
2	* 5.376	46.64	Pk	34.7	-18.6	0	62.74	-	-	74	-11.26	34	231	H
3	* 5.35	34.66	RMS	34.7	-18.7	.19	50.85	54	-3.15	-	-	34	231	H
4	* 5.352	35.39	RMS	34.7	-18.7	.19	51.58	54	-2.42	-	-	34	231	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

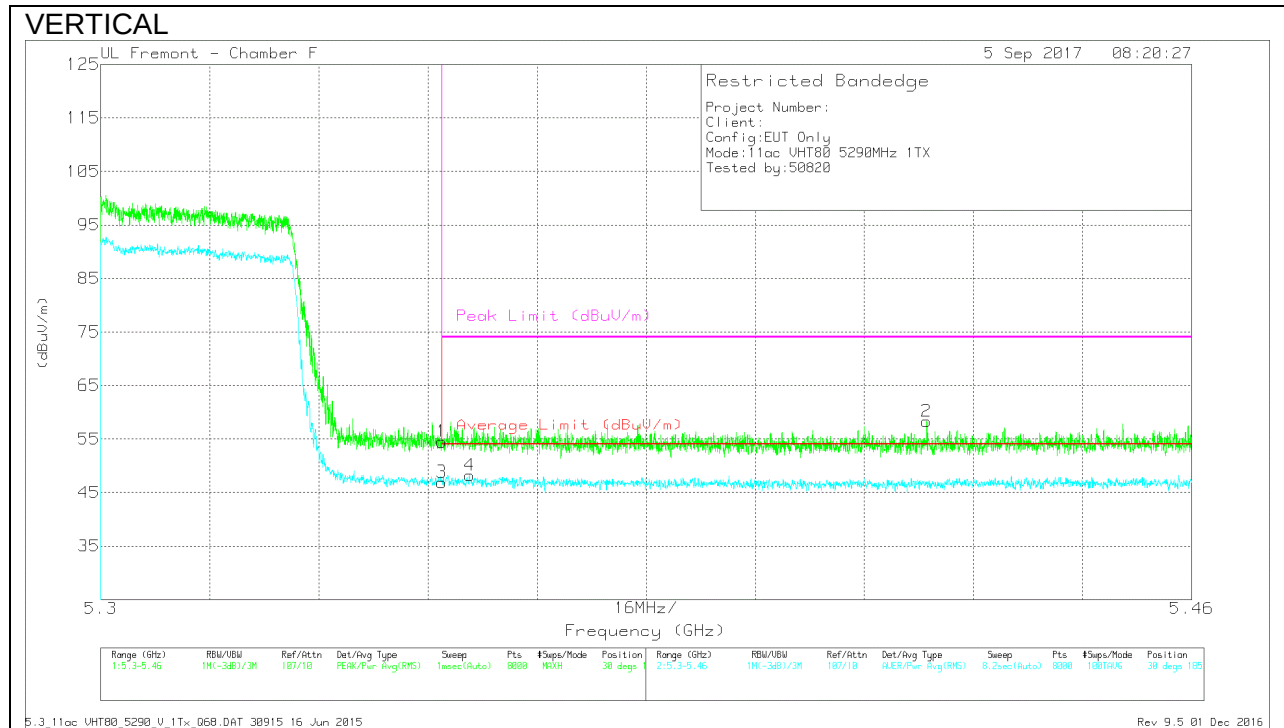

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.5	Pk	34.7	-18.7	0	54.5	-	-	74	-19.5	30	185	V
2	* 5.421	42.29	Pk	34.7	-18.7	0	58.29	-	-	74	-15.71	30	185	V
3	* 5.35	30.87	RMS	34.7	-18.7	.19	47.06	54	-6.94	-	-	30	185	V
4	* 5.354	32.09	RMS	34.7	-18.6	.19	48.38	54	-5.62	-	-	30	185	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1TX Antenna B

BANDEDGE (MID CHANNEL)

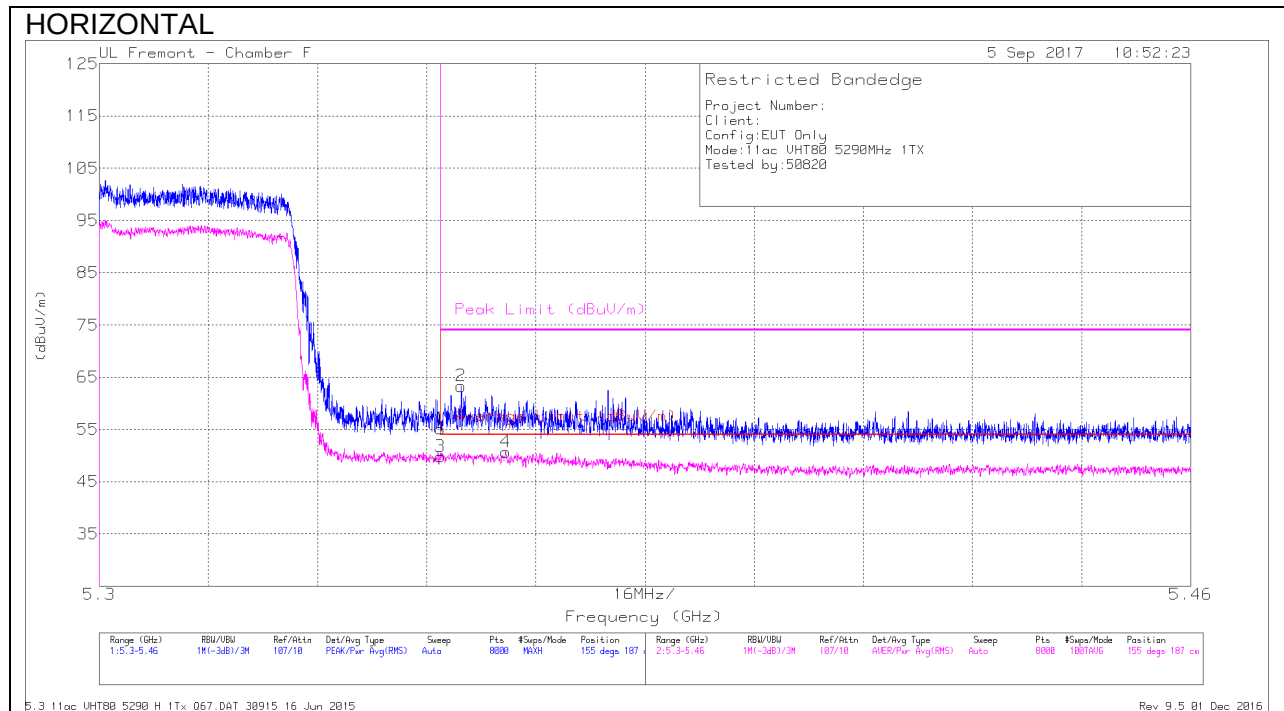


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.17	Pk	34.7	-18.7	0	55.17	-	-	74	-18.83	155	187	H
2	* 5.353	47.27	Pk	34.7	-18.7	0	63.27	-	-	74	-10.73	155	187	H
3	* 5.35	33.83	RMS	34.7	-18.7	.19	50.02	54	-3.98	-	-	155	187	H
4	* 5.36	34.63	RMS	34.7	-18.7	.19	50.82	54	-3.18	-	-	155	187	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

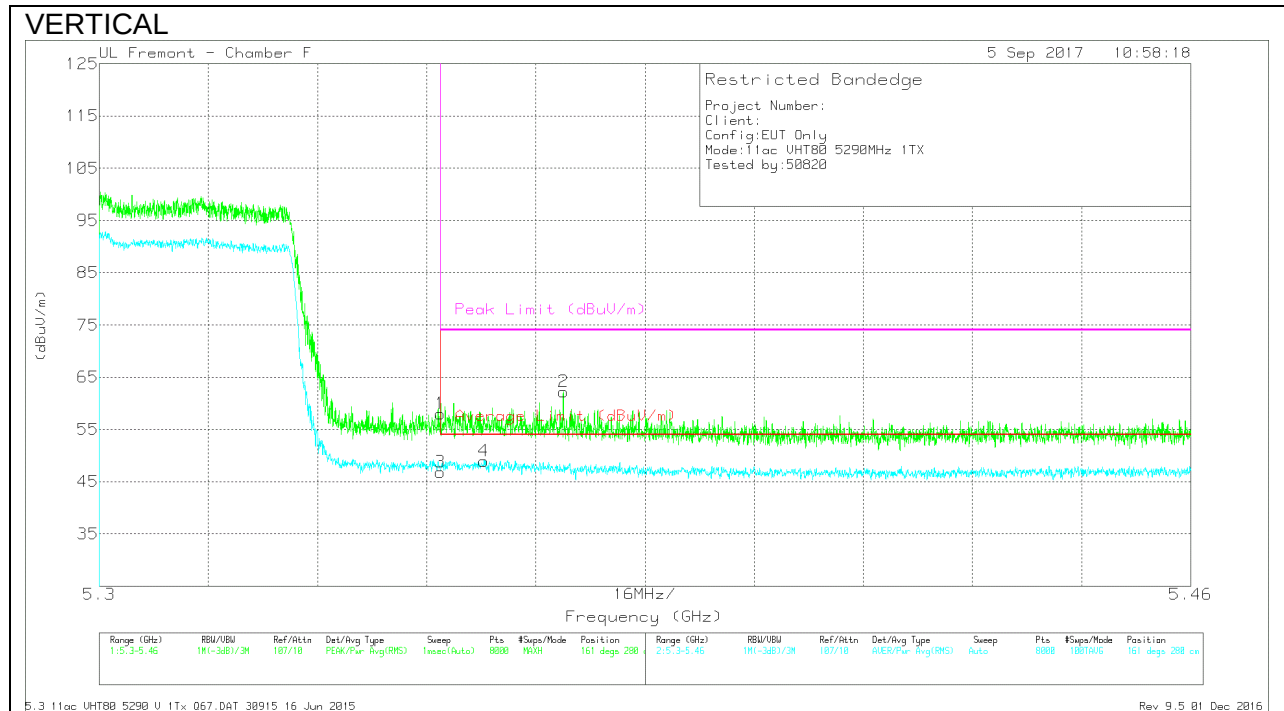


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.04	Pk	34.7	-18.7	0	58.04	-	-	74	-15.96	161	280	V
2	* 5.368	46.14	Pk	34.7	-18.6	0	62.24	-	-	74	-11.76	161	280	V
3	* 5.35	30.86	RMS	34.7	-18.7	.19	47.05	54	-6.95	-	-	161	280	V
4	* 5.356	32.83	RMS	34.7	-18.6	.19	49.12	54	-4.88	-	-	161	280	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

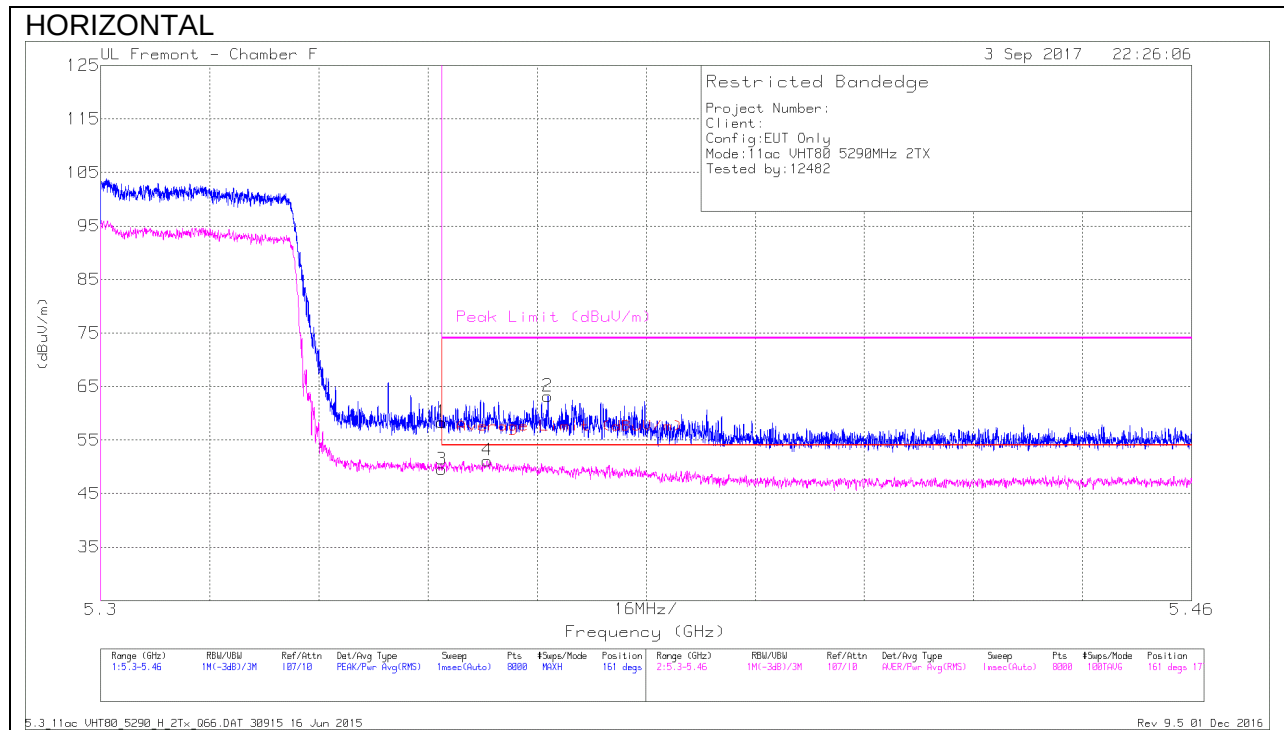
2TX Antenna A + Antenna B CDD MODE**BANDEDGE (MID CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.32	Pk	34.7	-18.7	0	58.32	-	-	74	-15.68	161	177	H
2	* 5.366	47.12	Pk	34.7	-18.6	0	63.22	-	-	74	-10.78	161	177	H
3	* 5.35	33.35	RMS	34.7	-18.7	.19	49.54	54	-4.46	-	-	161	177	H
4	* 5.357	34.89	RMS	34.7	-18.6	.19	51.18	54	-2.82	-	-	161	177	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

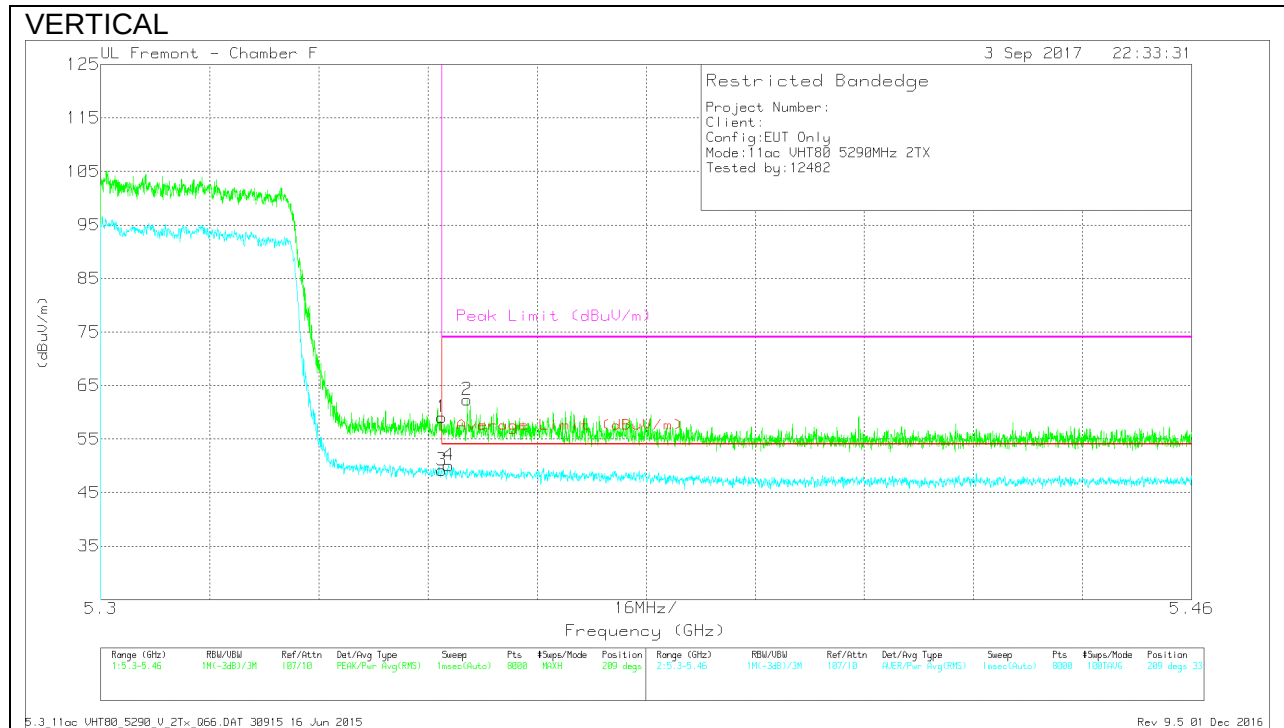

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.1	Pk	34.7	-18.7	0	59.1	-	-	74	-14.9	209	331	V
2	* 5.354	46.24	Pk	34.7	-18.6	0	62.34	-	-	74	-11.66	209	331	V
3	* 5.35	33	RMS	34.7	-18.7	.19	49.19	54	-4.81	-	-	209	331	V
4	* 5.351	33.9	RMS	34.7	-18.7	.19	50.09	54	-3.91	-	-	209	331	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

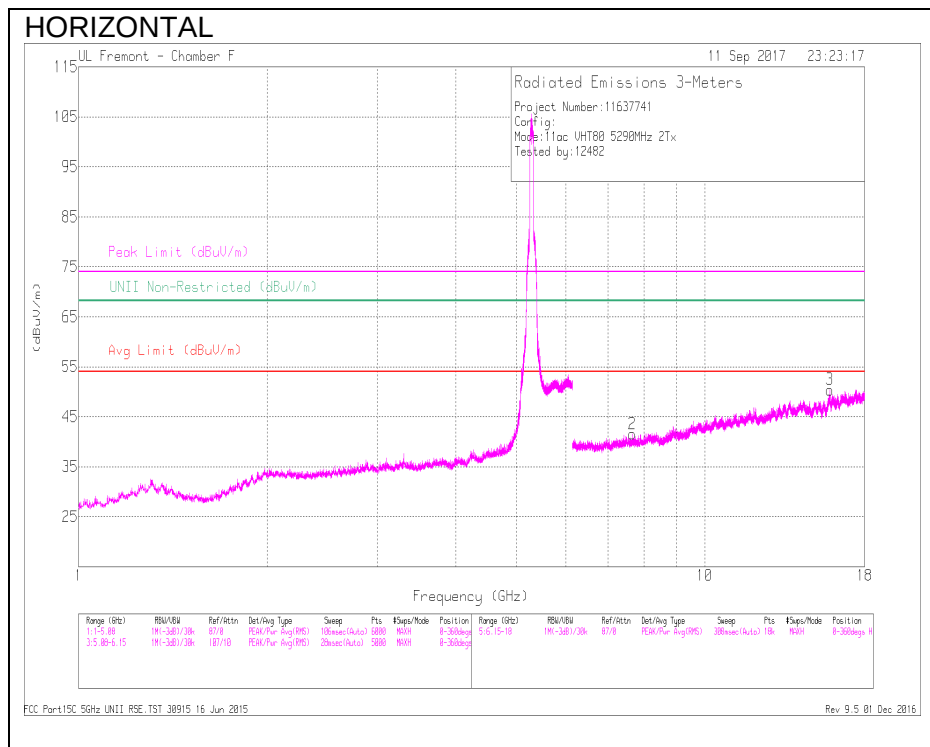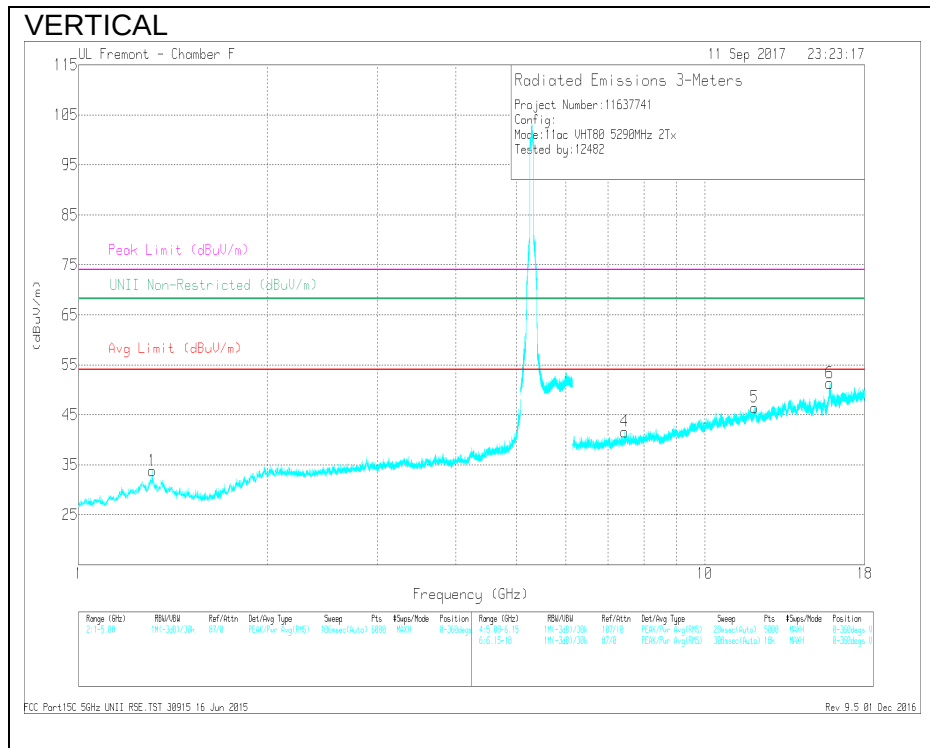

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.311	41.83	PK-U	30	-31.4	0	40.43	-	-	74	-33.57	-	-	272	184	V
	* 1.311	29.58	ADR	30	-31.4	.19	28.37	54	-25.63	-	-	-	-	272	184	V
2	* 7.662	36.24	PK-U	36.1	-24.8	0	47.54	-	-	74	-26.46	-	-	126	231	H
	* 7.662	25.43	ADR	36.1	-24.8	.19	36.92	54	-17.08	-	-	-	-	126	231	H
3	* 15.842	36.93	PK-U	41.4	-22.4	0	55.93	-	-	74	-18.07	-	-	99	124	H
	* 15.844	25.6	ADR	41.3	-22.4	.19	44.69	54	-9.31	-	-	-	-	99	124	H
4	* 7.447	37.49	PK-U	36	-25.7	0	47.79	-	-	74	-26.21	-	-	142	286	V
	* 7.445	26.32	ADR	36	-25.7	.19	36.81	54	-17.19	-	-	-	-	142	286	V
5	* 12.014	35.29	PK-U	39.2	-21.7	0	52.79	-	-	74	-21.21	-	-	85	283	V
	* 12.012	24.07	ADR	39.2	-21.7	.19	41.76	54	-12.24	-	-	-	-	85	283	V
6	* 15.831	40.64	PK-U	41.6	-22.5	0	59.74	-	-	74	-14.26	-	-	252	211	V
	* 15.831	28.07	ADR	41.6	-22.5	.19	47.36	54	-6.64	-	-	-	-	252	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.1.7. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX Antenna A

BANDEDGE (LOW CHANNEL)

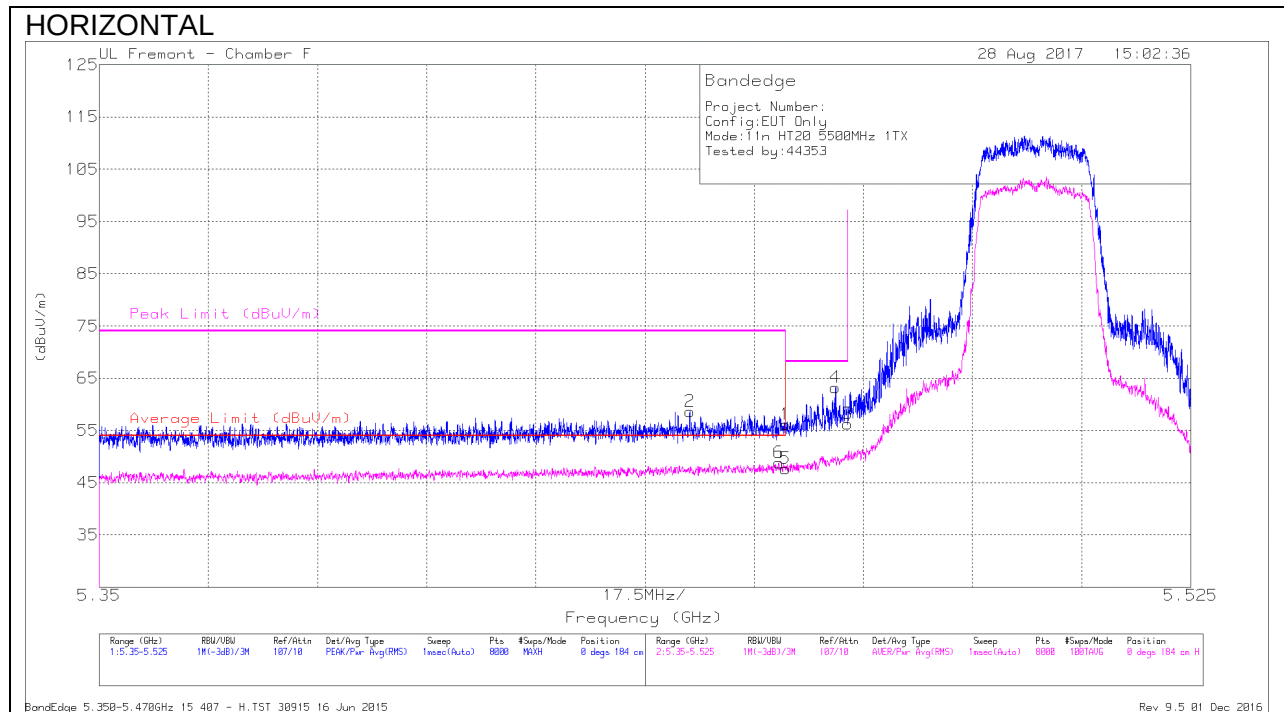


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.06	Pk	34.8	-18.7	56.16	-	-	74	-17.84	0	184	H
2	* 5.445	42.5	Pk	34.8	-18.7	58.6	-	-	74	-15.4	0	184	H
3	5.47	40.11	Pk	34.8	-18.7	56.21	-	-	68.2	-11.99	0	184	H
4	5.468	47.26	Pk	34.8	-18.8	63.26	-	-	68.2	-4.94	0	184	H
5	* 5.46	31.59	RMS	34.8	-18.7	47.69	54	-6.31	-	-	0	184	H
6	* 5.459	32.73	RMS	34.8	-18.7	48.83	54	-5.17	-	-	0	184	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

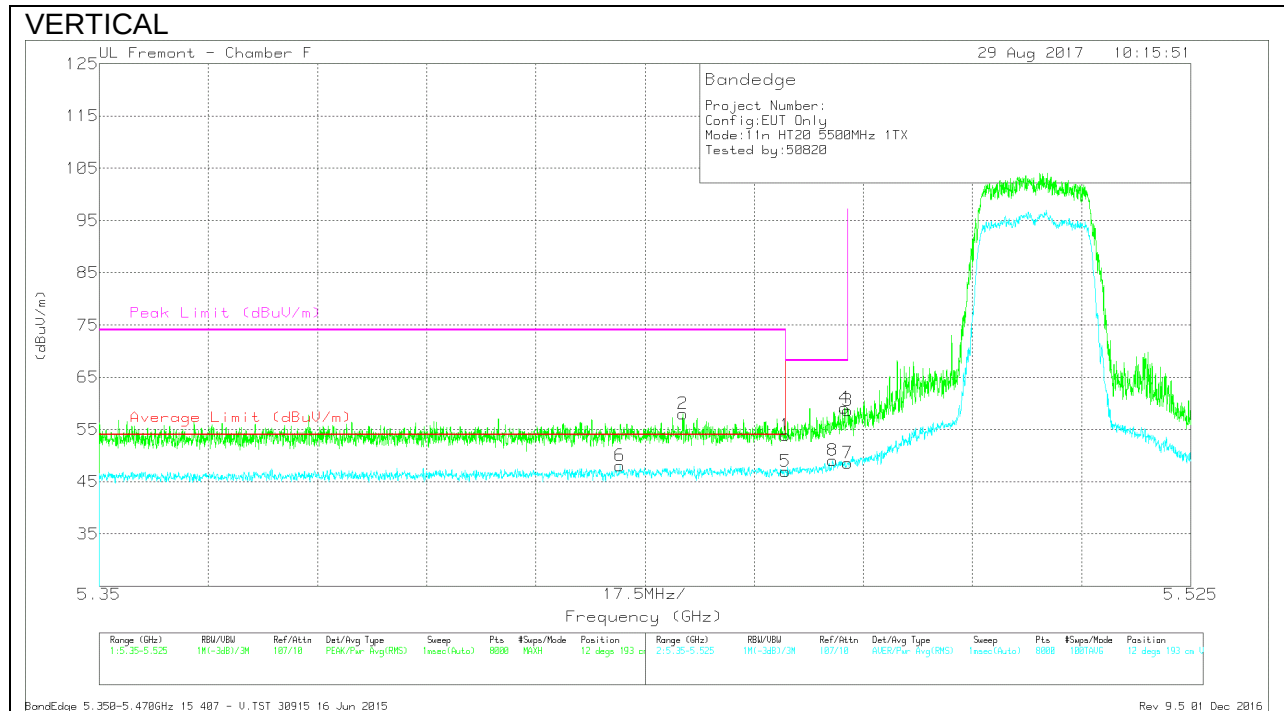


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.74	Pk	34.8	-18.7	53.84	-	-	74	-20.16	12	193	V
2	* 5.444	41.88	Pk	34.8	-18.7	57.98	-	-	74	-16.02	12	193	V
3	5.47	42.47	Pk	34.8	-18.7	58.57	-	-	68.2	-9.63	12	193	V
4	5.469	42.97	Pk	34.8	-18.7	59.07	-	-	68.2	-9.13	12	193	V
5	* 5.46	30.89	RMS	34.8	-18.7	46.99	54	-7.01	-	-	12	193	V
6	* 5.433	31.9	RMS	34.8	-18.7	48	54	-6	-	-	12	193	V
7	5.47	32.4	RMS	34.8	-18.7	48.5	-	-	-	-	12	193	V
8	5.468	33.02	RMS	34.8	-18.8	49.02	-	-	-	-	12	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

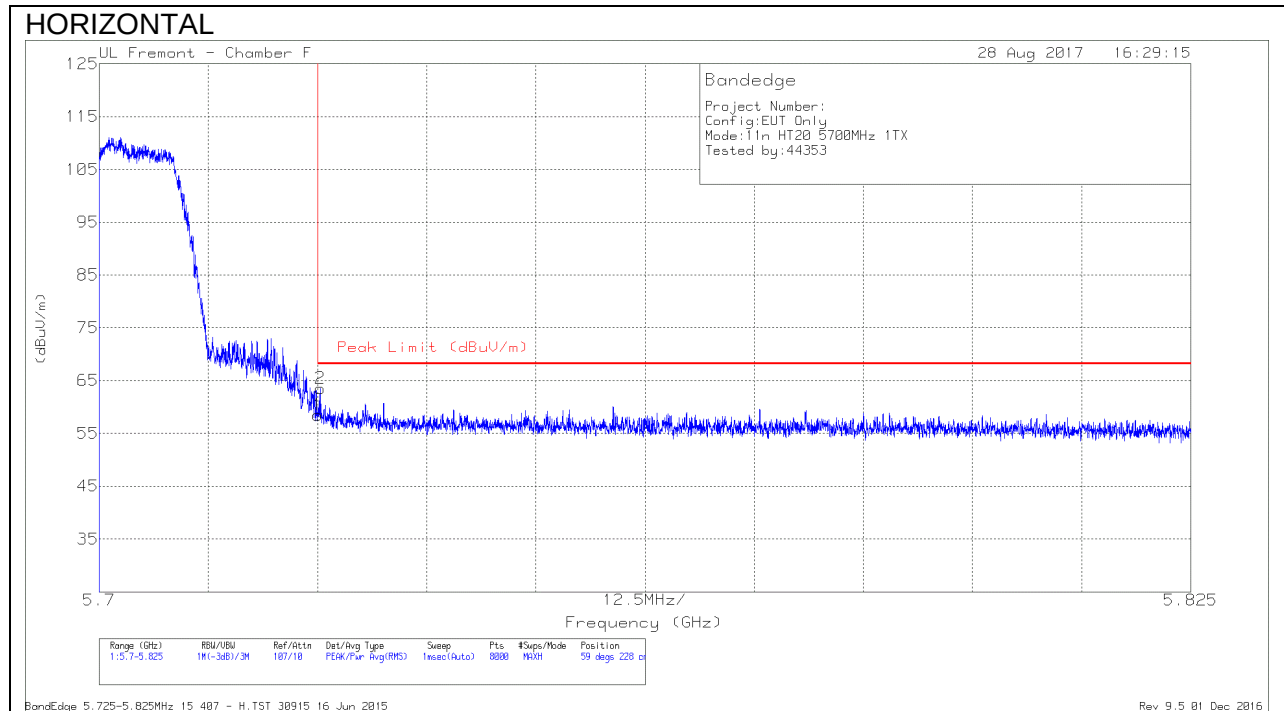


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.42	Pk	35	-18	58.42	68.2	-9.78	59	228	H
2	5.725	46.5	Pk	35	-18	63.5	68.2	-4.7	59	228	H

Pk - Peak detector

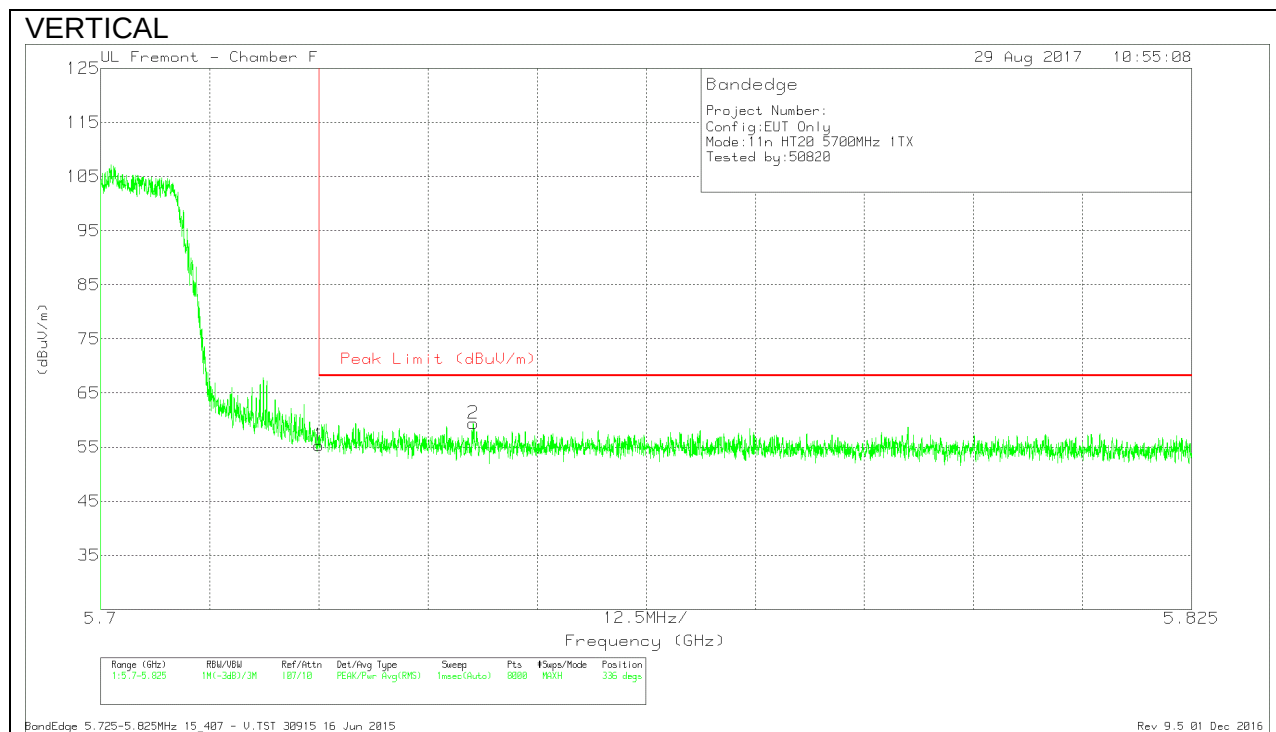

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.34	Pk	35	-18	55.34	68.2	-12.86	336	183	V
2	5.743	42.3	Pk	35	-17.9	59.4	68.2	-8.8	336	183	V

Pk - Peak detector

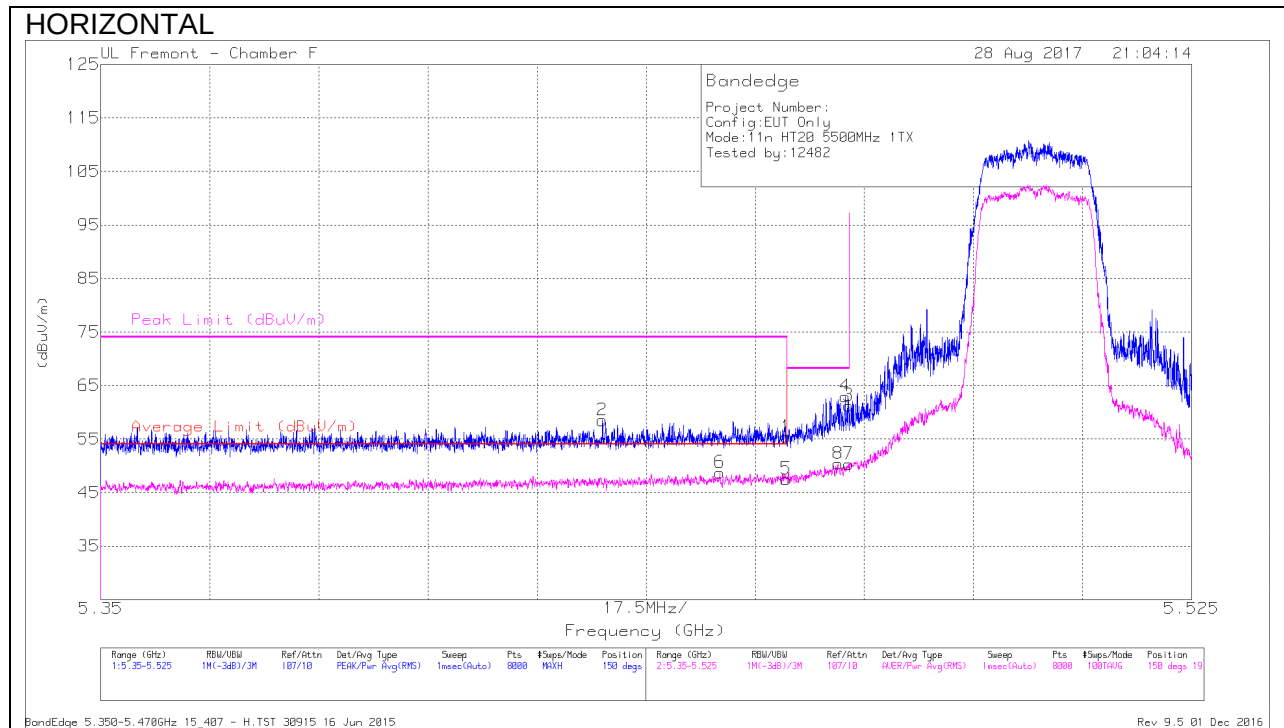
1TX Antenna B**BANDEDGE (LOW CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.29	Pk	34.8	-18.7	55.39	-	-	74	-18.61	150	191	H
2	* 5.43	42.61	Pk	34.7	-18.8	58.51	-	-	74	-15.49	150	191	H
3	5.47	45.15	Pk	34.8	-18.7	61.25	-	-	68.2	-6.95	150	191	H
4	5.469	46.88	Pk	34.8	-18.7	62.98	-	-	68.2	-5.22	150	191	H
5	* 5.46	31.42	RMS	34.8	-18.7	47.52	54	-6.48	-	-	150	191	H
6	* 5.449	32.64	RMS	34.8	-18.7	48.74	54	-5.26	-	-	150	191	H
7	5.47	34.21	RMS	34.8	-18.7	50.31	-	-	-	-	150	191	H
8	5.468	34.29	RMS	34.8	-18.7	50.39	-	-	-	-	150	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

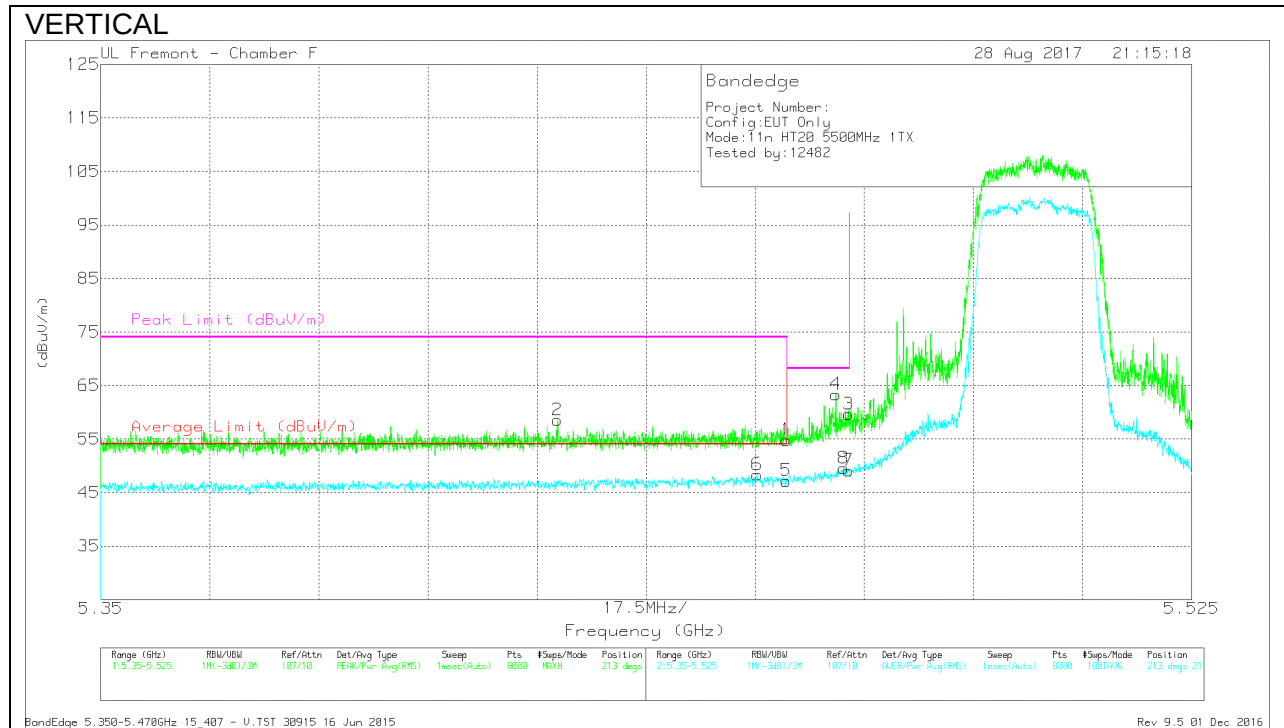


Marker	Frequ ncy (GHz)	Meter Readin g (dBuV)	Det	AF T119 (dB/m)	Amp/C bl/Filtr/ Pad (dB)	Correct ed Readin g (dBuV/ m)	Averag e Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.73	Pk	34.8	-18.7	54.83	-	-	74	-19.17	213	217	V
2	* 5.423	42.55	Pk	34.7	-18.7	58.55	-	-	74	-15.45	213	217	V
3	5.47	43.54	Pk	34.8	-18.7	59.64	-	-	68.2	-8.56	213	217	V
4	5.468	47.33	Pk	34.8	-18.8	63.33	-	-	68.2	-4.87	213	217	V
5	* 5.46	31.1	RMS	34.8	-18.7	47.2	54	-6.8	-	-	213	217	V
6	* 5.455	32.25	RMS	34.8	-18.7	48.35	54	-5.65	-	-	213	217	V
7	5.47	32.96	RMS	34.8	-18.7	49.06	-	-	-	-	213	217	V
8	5.469	33.44	RMS	34.8	-18.7	49.54	-	-	-	-	213	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

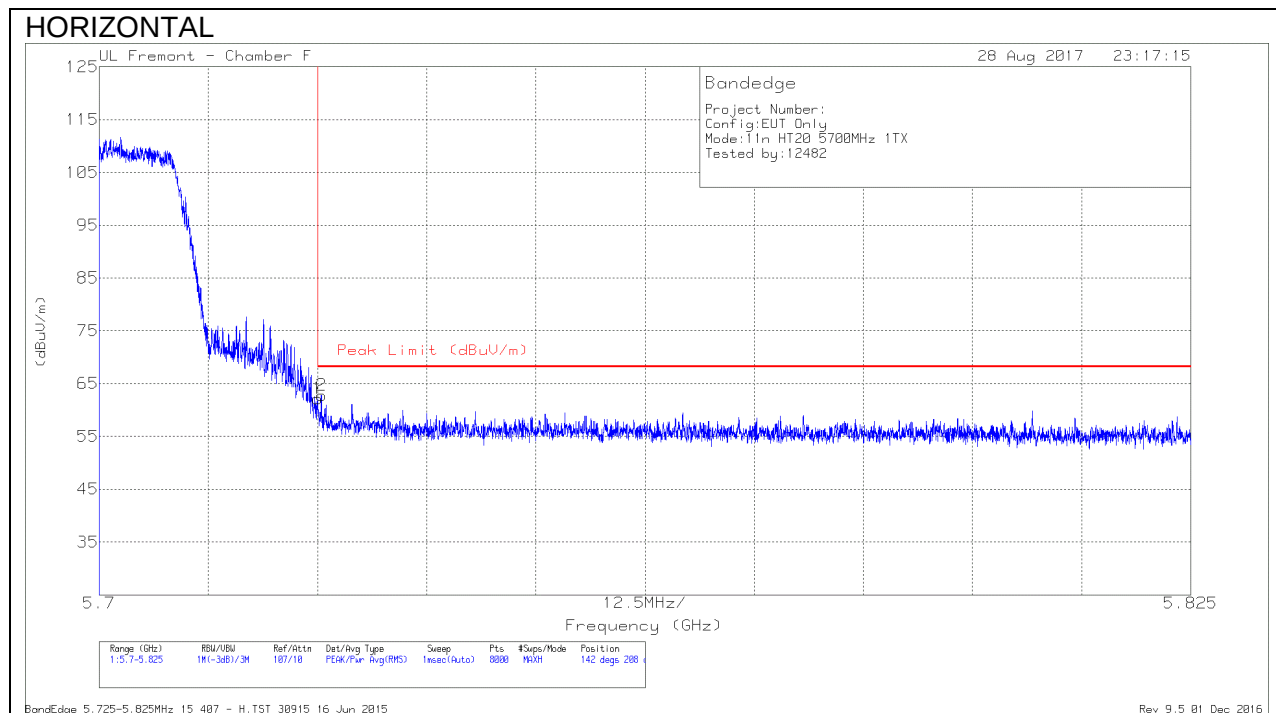


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.2	Pk	35	-18	62.2	68.2	-6	142	208	H
2	5.725	45.76	Pk	35	-18	62.76	68.2	-5.44	142	208	H

Pk - Peak detector

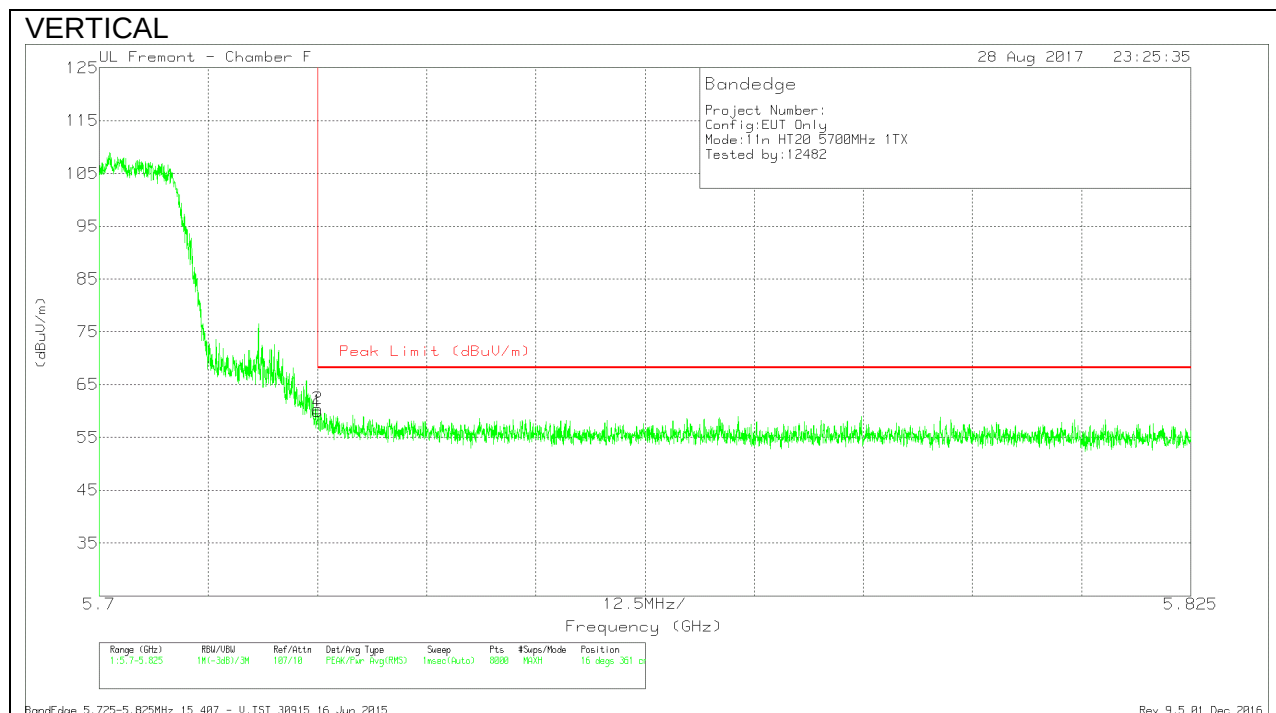

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.99	Pk	35	-18	59.99	68.2	-8.21	16	361	V
2	5.725	43.38	Pk	35	-18	60.38	68.2	-7.82	16	361	V

Pk - Peak detector

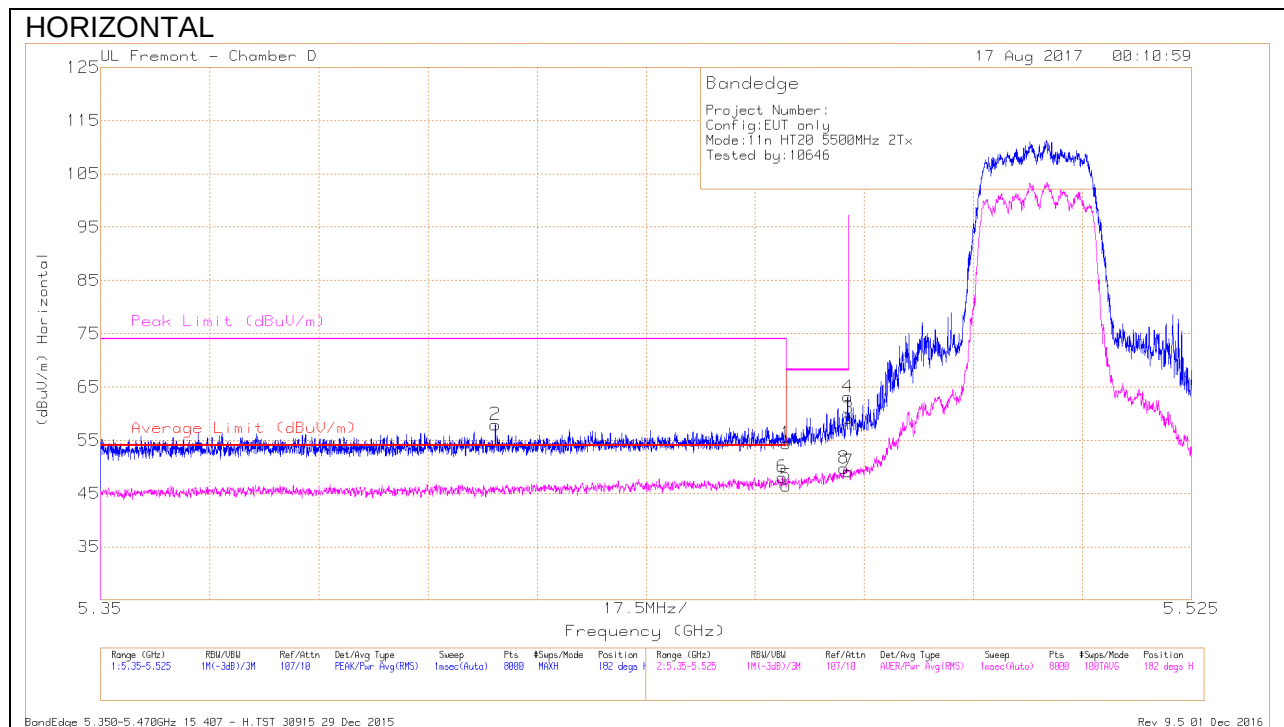
2TX Antenna A + Antenna B CDD MODE**BANDEDGE (LOW CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.92	Pk	34.4	-17.9	54.42	-	-	74	-19.58	182	160	H
2	* 5.413	41.82	Pk	34.3	-18.2	57.92	-	-	74	-16.08	182	160	H
5	* 5.46	30	RMS	34.4	-17.9	46.5	54	-7.5	-	-	182	160	H
6	* 5.459	31.67	RMS	34.4	-18	48.07	54	-5.93	-	-	182	160	H
8	5.469	33.25	RMS	34.4	-17.9	49.75	-	-	-	-	182	160	H
3	5.47	42.64	Pk	34.4	-17.9	59.14	-	-	68.2	-9.06	182	160	H
4	5.47	46.64	Pk	34.4	-17.9	63.14	-	-	68.2	-5.06	182	160	H
7	5.47	32.63	RMS	34.4	-17.9	49.13	-	-	-	-	182	160	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

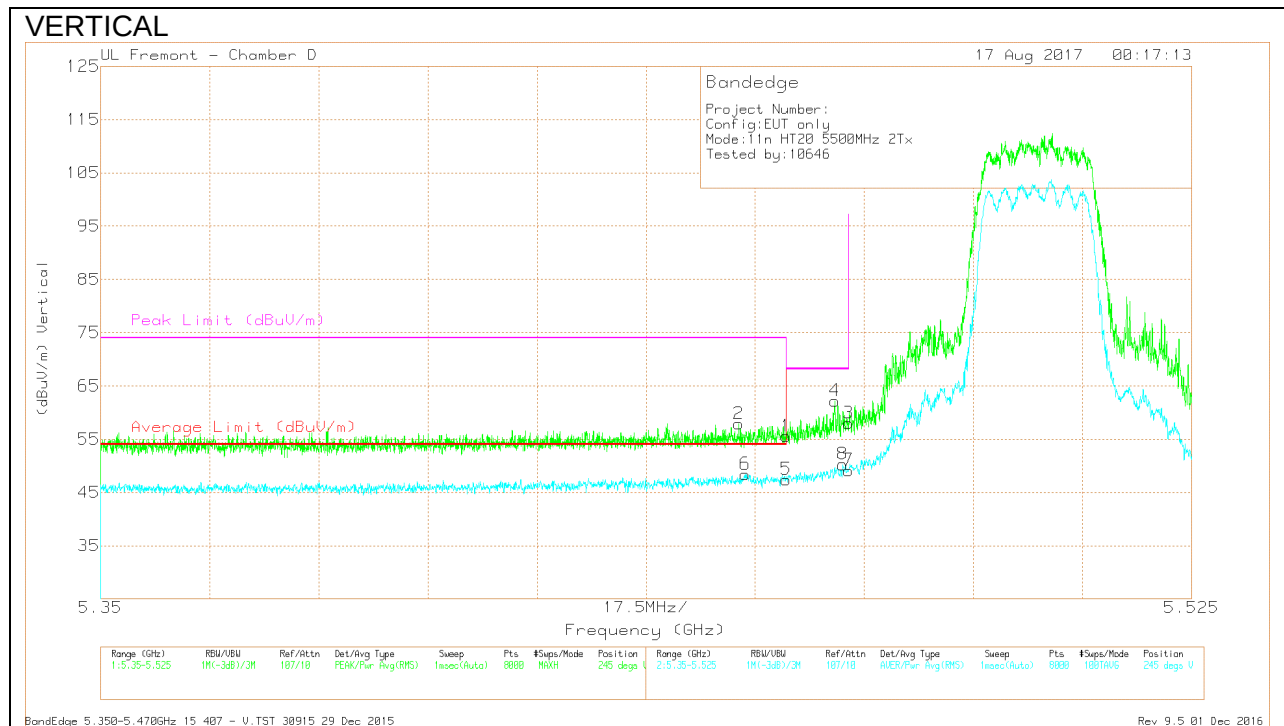


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl /Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.08	Pk	34.4	-17.9	55.58	-	-	74	-18.42	245	338	V
2	* 5.452	41.48	Pk	34.4	-18	57.88	-	-	74	-16.12	245	338	V
5	* 5.46	30.94	RMS	34.4	-17.9	47.44	54	-6.56	-	-	245	338	V
6	* 5.453	32.01	RMS	34.4	-18	48.41	54	-5.59	-	-	245	338	V
4	5.468	45.71	Pk	34.4	-17.9	62.21	-	-	68.2	-5.99	245	338	V
8	5.469	33.77	RMS	34.4	-17.9	50.27	-	-	-	-	245	338	V
3	5.47	41.49	Pk	34.4	-17.9	57.99	-	-	68.2	-10.21	245	338	V
7	5.47	32.62	RMS	34.4	-17.9	49.12	-	-	-	-	245	338	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

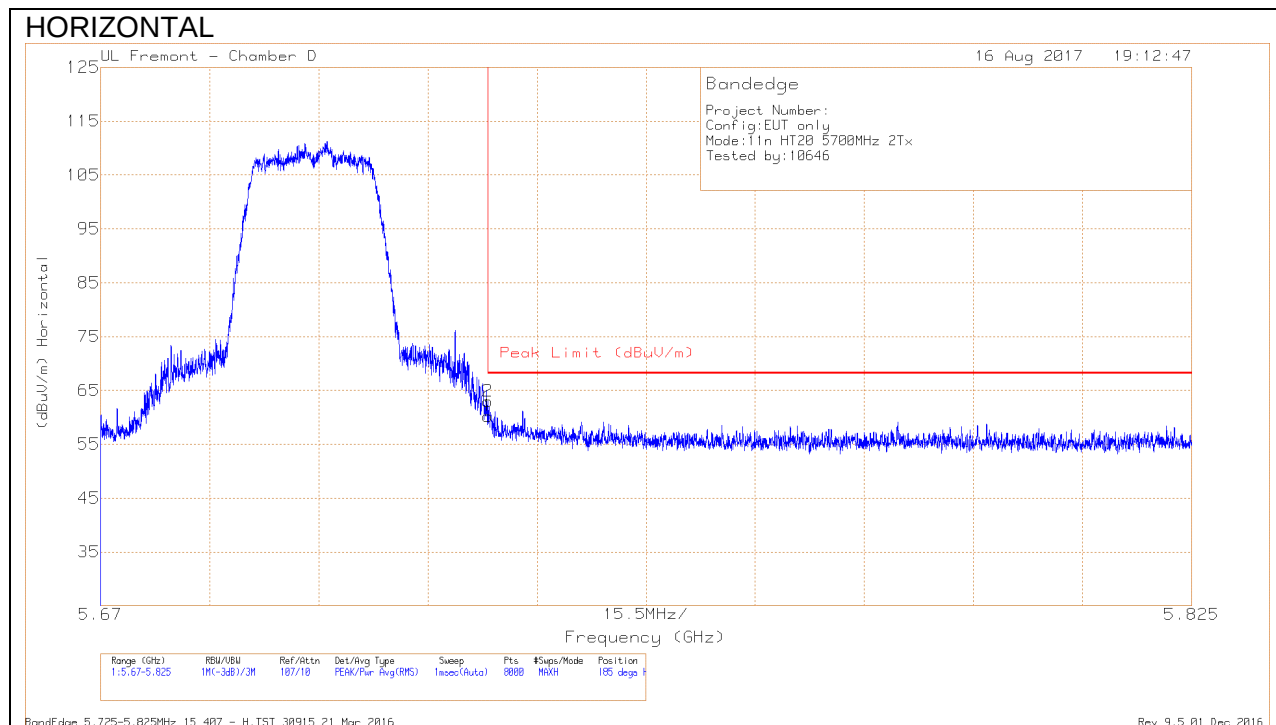



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.96	Pk	34.8	-17.5	60.26	68.2	-7.94	185	214	H
2	5.725	45.68	Pk	34.8	-17.5	62.98	68.2	-5.22	185	214	H

Pk - Peak detector

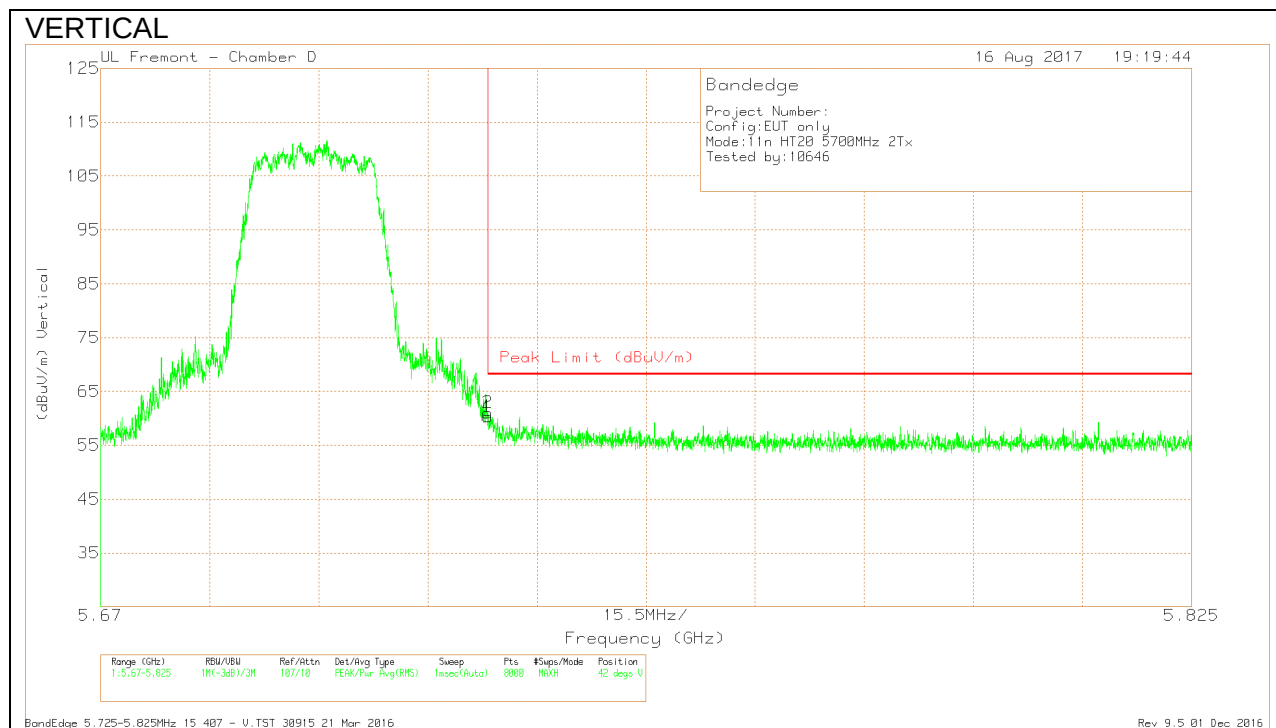

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43	Pk	34.8	-17.5	60.3	68.2	-7.9	42	334	V
2	5.725	43.73	Pk	34.8	-17.5	61.03	68.2	-7.17	42	334	V

Pk - Peak detector

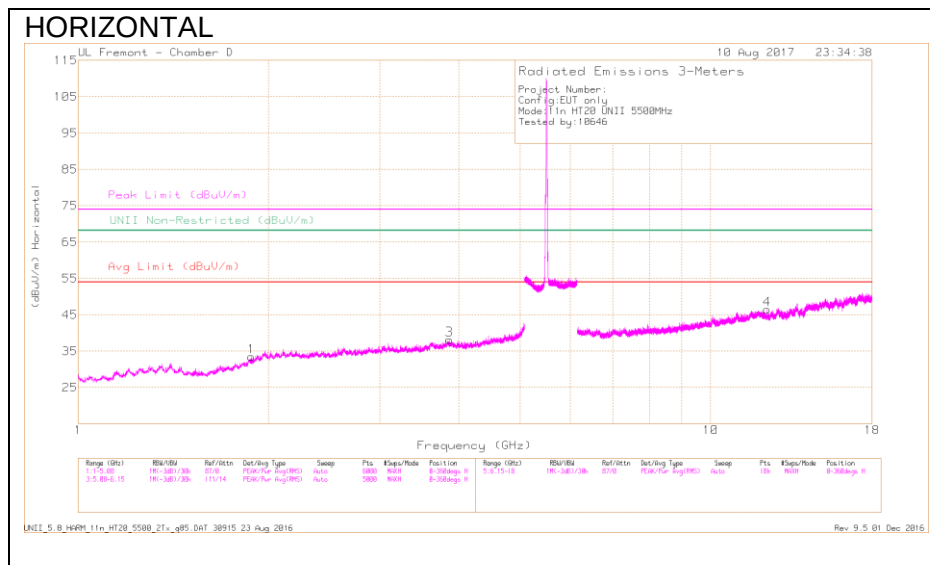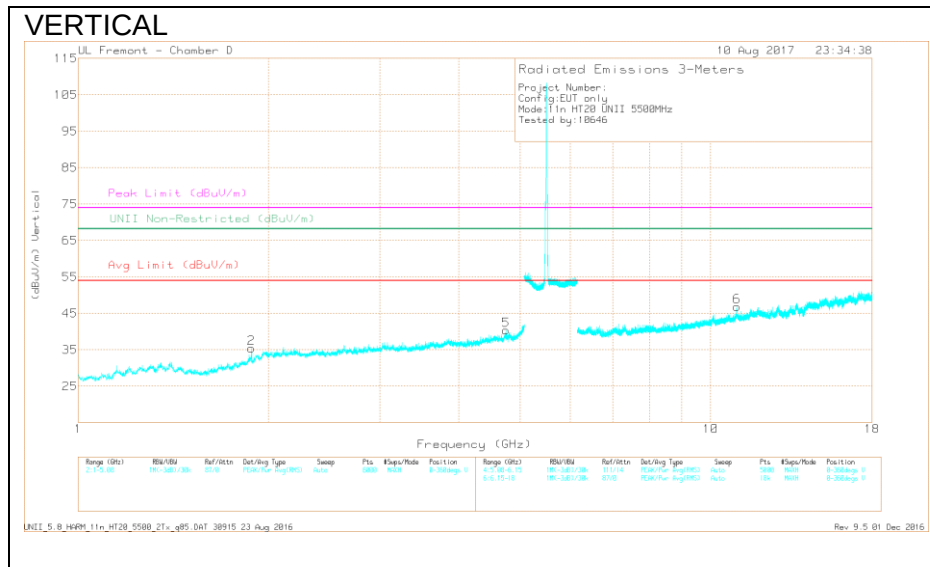HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb l/Filtr/P ad (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 3.861	38.45	PK-U	33.7	-29.5	42.65	-	-	74	-31.35	-	-	131	223	H
	* 3.862	27.66	ADR	33.7	-29.5	31.86	54	-22.14	-	-	-	-	131	223	H
5	* 4.749	39.25	PK-U	34.4	-28.8	44.85	-	-	74	-29.15	-	-	258	142	V
	* 4.751	27.52	ADR	34.4	-28.8	33.12	54	-20.88	-	-	-	-	258	142	V
4	* 12.284	34.28	PK-U	38.9	-23.9	49.28	-	-	74	-24.72	-	-	27	296	H
	* 12.285	23.48	ADR	38.9	-23.9	38.48	54	-15.52	-	-	-	-	27	296	H
6	* 11.001	34.44	PK-U	38.5	-22.3	50.64	-	-	74	-23.36	-	-	144	179	V
	* 10.999	23.13	ADR	38.5	-22.2	39.43	54	-14.57	-	-	-	-	144	179	V
1	1.88	44.62	PK-U	30.6	-33.3	41.92	-	-	-	-	68.2	-26.28	191	273	H
2	1.88	46.9	PK-U	30.6	-33.3	44.2	-	-	-	-	68.2	-24	80	337	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

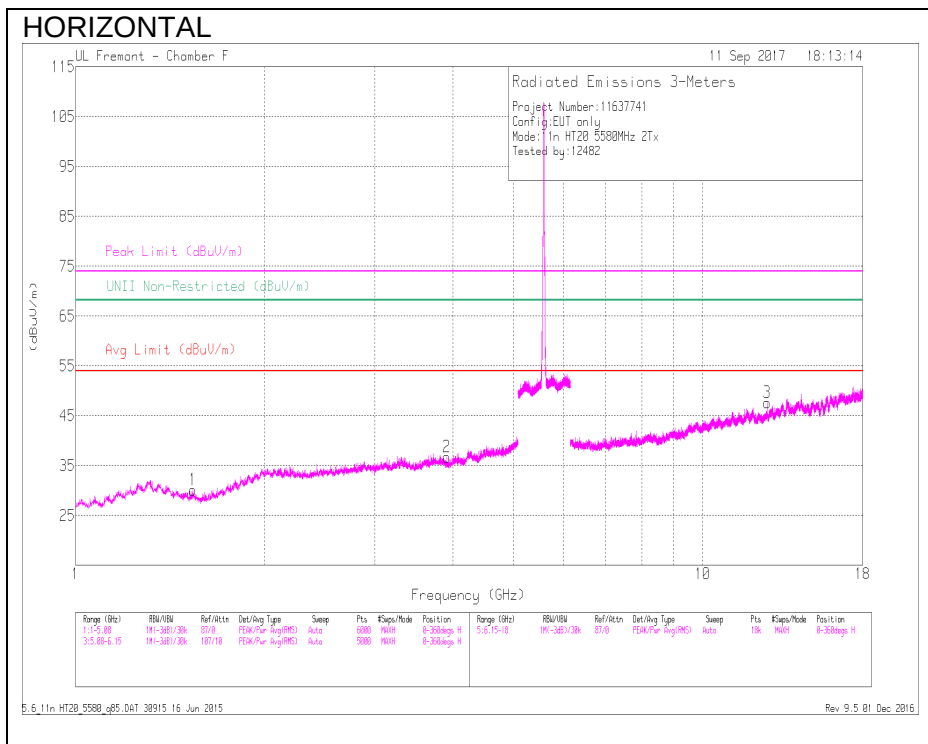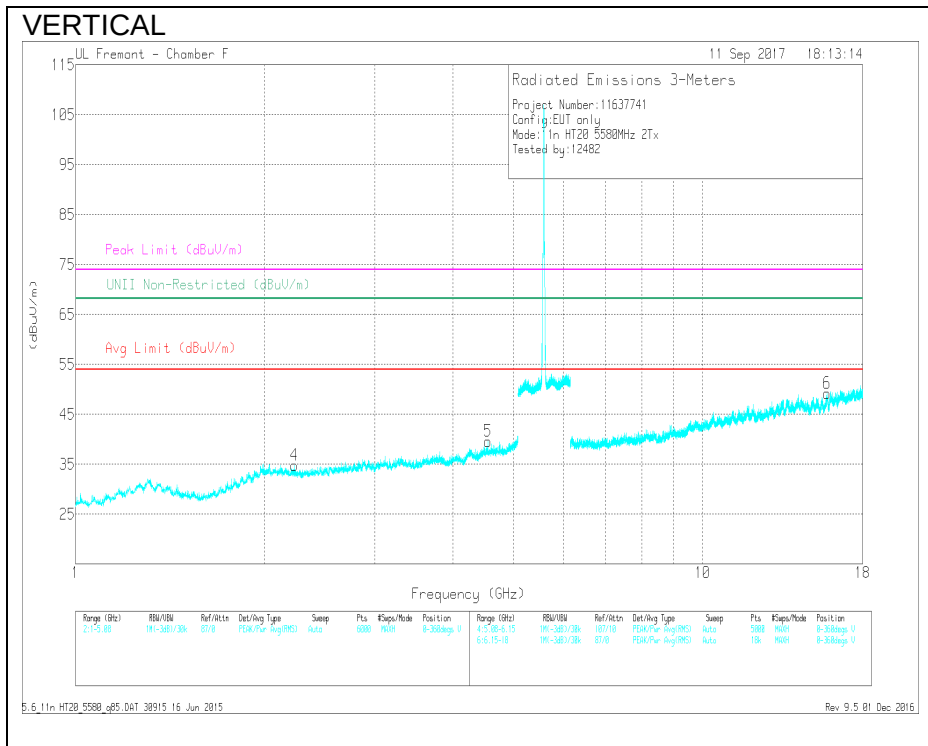

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Readin g (dBuV)	Det	AF T119 (dB/m)	Amp/C bl/Fitr/ Pad (dB)	Correct ed Readin g (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.537	41.18	PK-U	27.5	-31.4	37.28	-	-	74	-36.72	-	-	330	168	H
	* 1.538	29.33	ADR	27.5	-31.4	25.43	54	-28.57	-	-	-	-	330	168	H
2	* 3.911	39.49	PK-U	33.2	-29.3	43.39	-	-	74	-30.61	-	-	156	118	H
	* 3.913	28.2	ADR	33.2	-29.3	32.1	54	-21.9	-	-	-	-	156	118	H
4	* 2.234	39.73	PK-U	31.9	-30.5	41.13	-	-	74	-32.87	-	-	290	305	V
	* 2.235	28.27	ADR	31.9	-30.5	29.67	54	-24.33	-	-	-	-	290	305	V
5	* 4.545	39.81	PK-U	34.1	-28.1	45.81	-	-	74	-28.19	-	-	87	266	V
	* 4.546	28.12	ADR	34.1	-28.1	34.12	54	-19.88	-	-	-	-	87	266	V
3	* 12.676	36.34	PK-U	38.9	-22.2	53.04	-	-	74	-20.96	-	-	179	155	H
	* 12.675	25.08	ADR	38.9	-22.2	41.78	54	-12.22	-	-	-	-	179	155	H
6	* 15.796	36.77	PK-U	42.2	-22.5	56.47	-	-	74	-17.53	-	-	264	249	V
	* 15.796	25.41	ADR	42.2	-22.5	45.11	54	-8.89	-	-	-	-	264	249	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

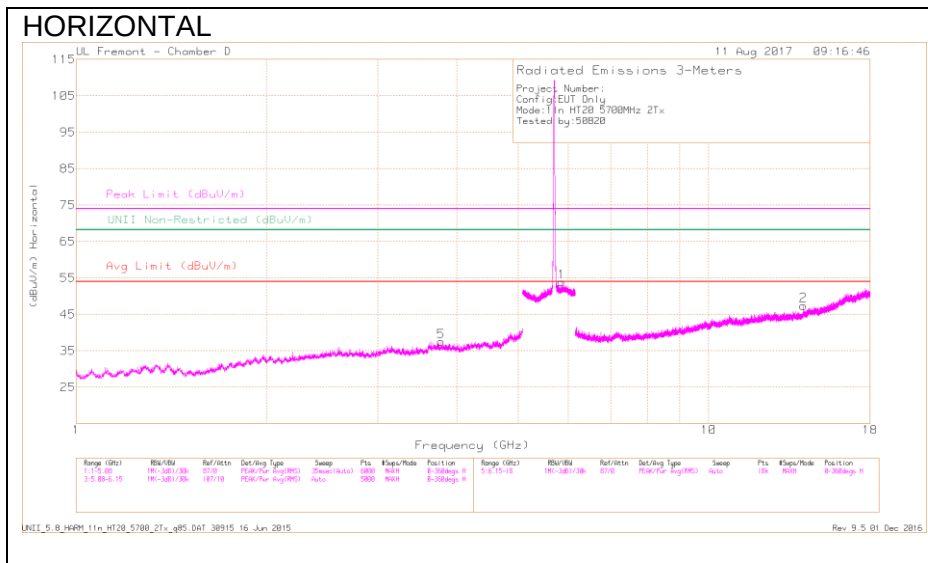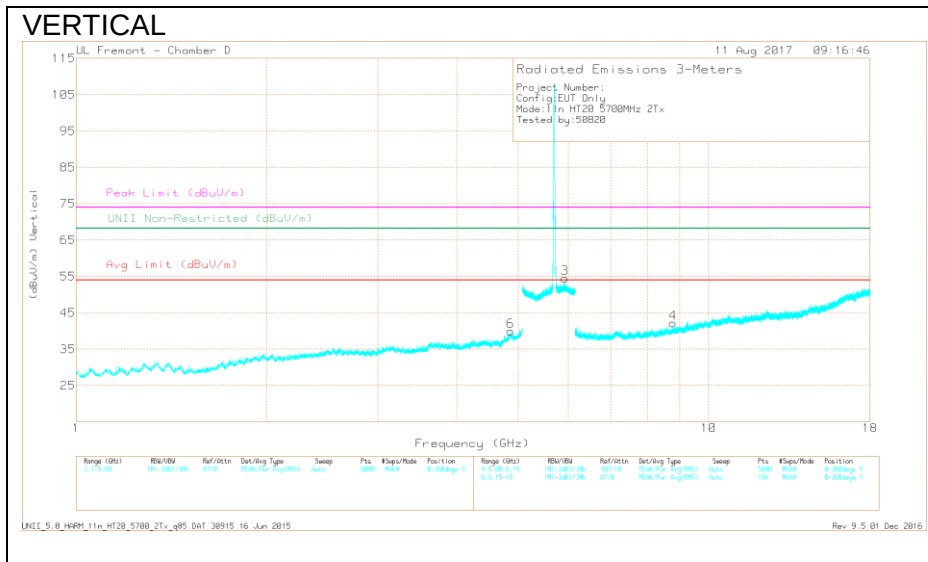

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 3.776	38.44	PK-U	33.1	-28.7	42.84	-	-	74	-31.16	-	-	265	309	H
	* 3.778	27.13	ADR	33.1	-28.6	31.63	54	-22.37	-	-	-	-	265	309	H
6	* 4.86	37.3	PK-U	34	-25.5	45.8	-	-	74	-28.2	-	-	360	230	V
	* 4.862	25.93	ADR	34	-25.4	34.53	54	-19.47	-	-	-	-	360	230	V
1	5.859	42.8	PK-U	34.8	-17.6	60	-	-	-	-	68.2	-8.2	207	200	H
3	5.925	42.32	PK-U	35	-17.4	59.92	-	-	-	-	68.2	-8.28	87	144	V
4	8.781	35.09	PK-U	35.9	-22.6	48.39	-	-	-	-	68.2	-19.81	183	158	V
2	14.111	36.29	PK-U	38.9	-22.1	53.09	-	-	-	-	68.2	-15.11	110	254	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

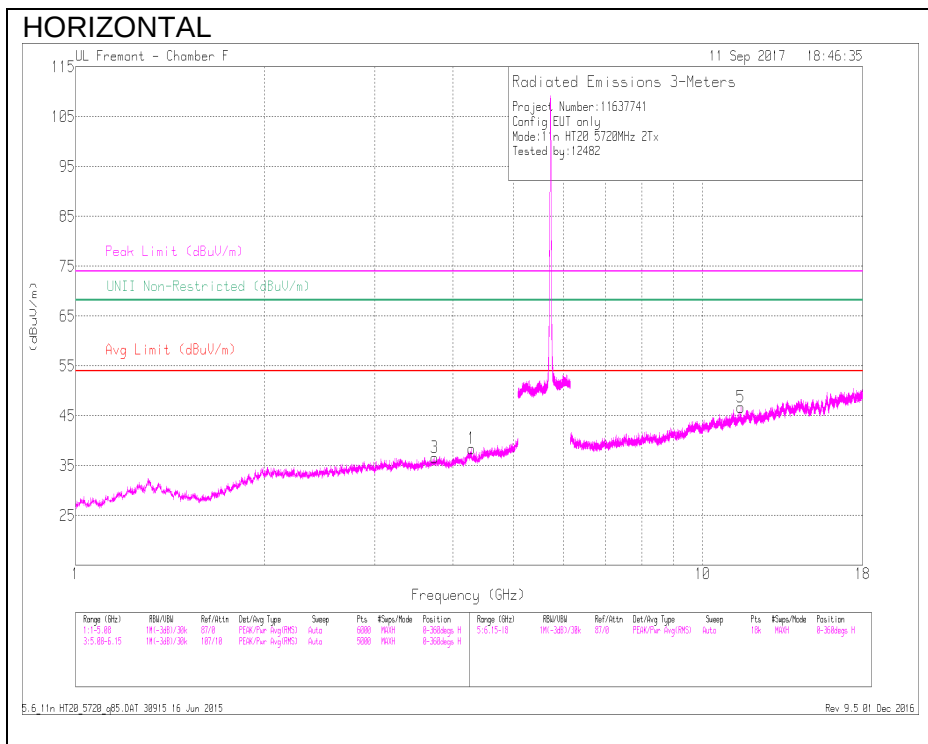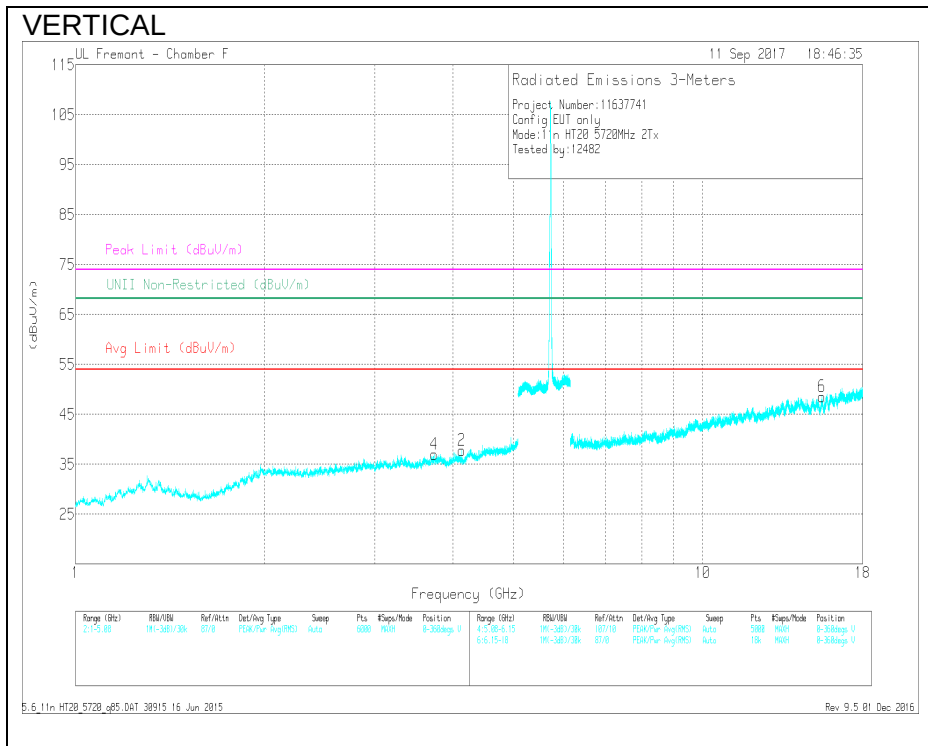

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.281	38.63	PK-U	33.7	-27.1	45.23	-	-	74	-28.77	262	188	H
	* 4.281	26.87	ADR	33.7	-27.1	33.47	54	-20.53	-	-	262	188	H
3	* 3.742	39.31	PK-U	33.3	-29.2	43.41	-	-	74	-30.59	177	139	H
	* 3.743	27.83	ADR	33.3	-29.2	31.93	54	-22.07	-	-	177	139	H
2	* 4.133	39.63	PK-U	33.4	-28.7	44.33	-	-	74	-29.67	24	296	V
	* 4.133	27.87	ADR	33.4	-28.7	32.57	54	-21.43	-	-	24	296	V
4	* 3.731	39.69	PK-U	33.3	-29.1	43.89	-	-	74	-30.11	322	218	V
	* 3.732	27.75	ADR	33.3	-29.1	31.95	54	-22.05	-	-	322	218	V
5	* 11.505	35.1	PK-U	38.5	-21.6	52	-	-	74	-22	69	293	H
	* 11.506	24.17	ADR	38.5	-21.6	41.07	54	-12.93	-	-	69	293	H
6	* 15.501	36.93	PK-U	41.6	-22.7	55.83	-	-	74	-18.17	248	164	V
	* 15.499	25.54	ADR	41.6	-22.7	44.44	54	-9.56	-	-	248	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.1.8. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX Antenna A

BANDEDGE (LOW CHANNEL)

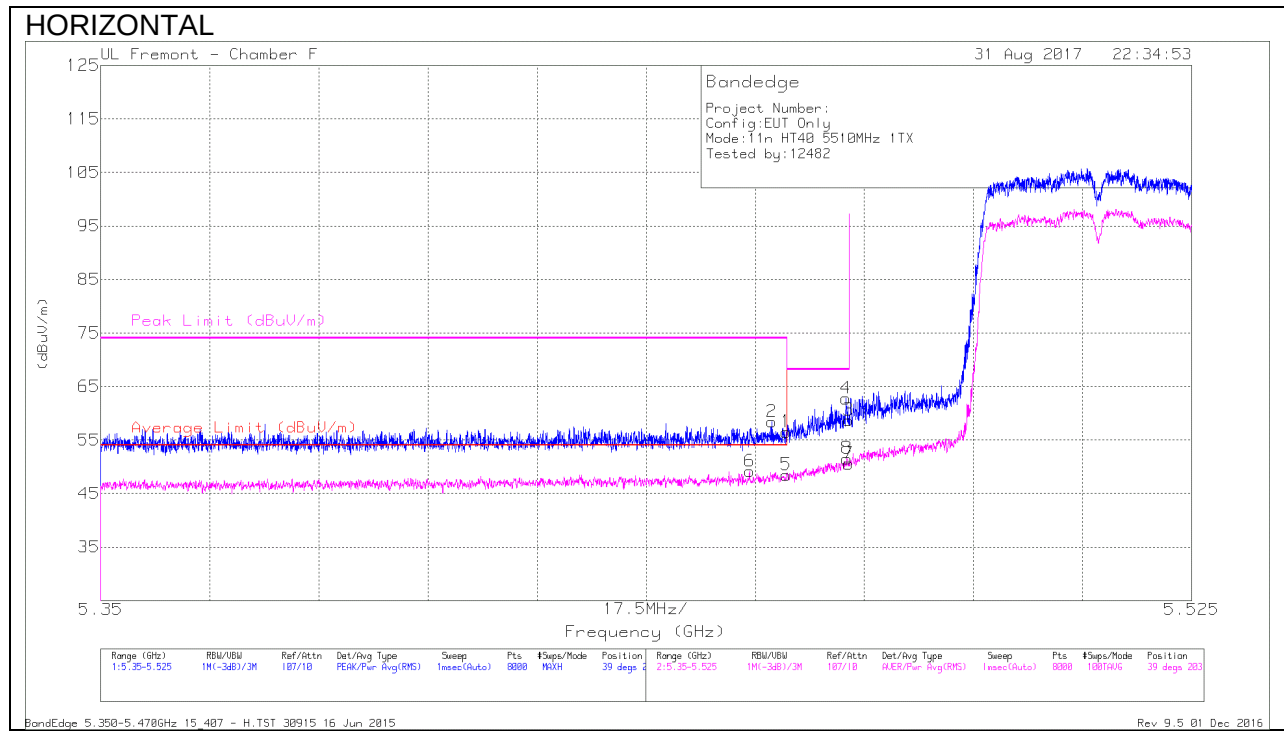


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.41	Pk	34.8	-18.7	0	56.51	-	-	74	-17.49	39	203	H
2	* 5.458	42.32	Pk	34.8	-18.7	0	58.42	-	-	74	-15.58	39	203	H
3	5.47	42.6	Pk	34.8	-18.7	0	58.7	-	-	68.2	-9.5	39	203	H
4	5.47	46.67	Pk	34.8	-18.7	0	62.77	-	-	68.2	-5.43	39	203	H
5	* 5.46	32.29	RMS	34.8	-18.7	.1	48.49	54	-5.51	-	-	39	203	H
6	* 5.454	32.97	RMS	34.8	-18.7	.1	49.17	54	-4.83	-	-	39	203	H
7	5.47	34.39	RMS	34.8	-18.7	.1	50.59	-	-	-	-	39	203	H
8	5.47	35.34	RMS	34.8	-18.7	.1	51.54	-	-	-	-	39	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

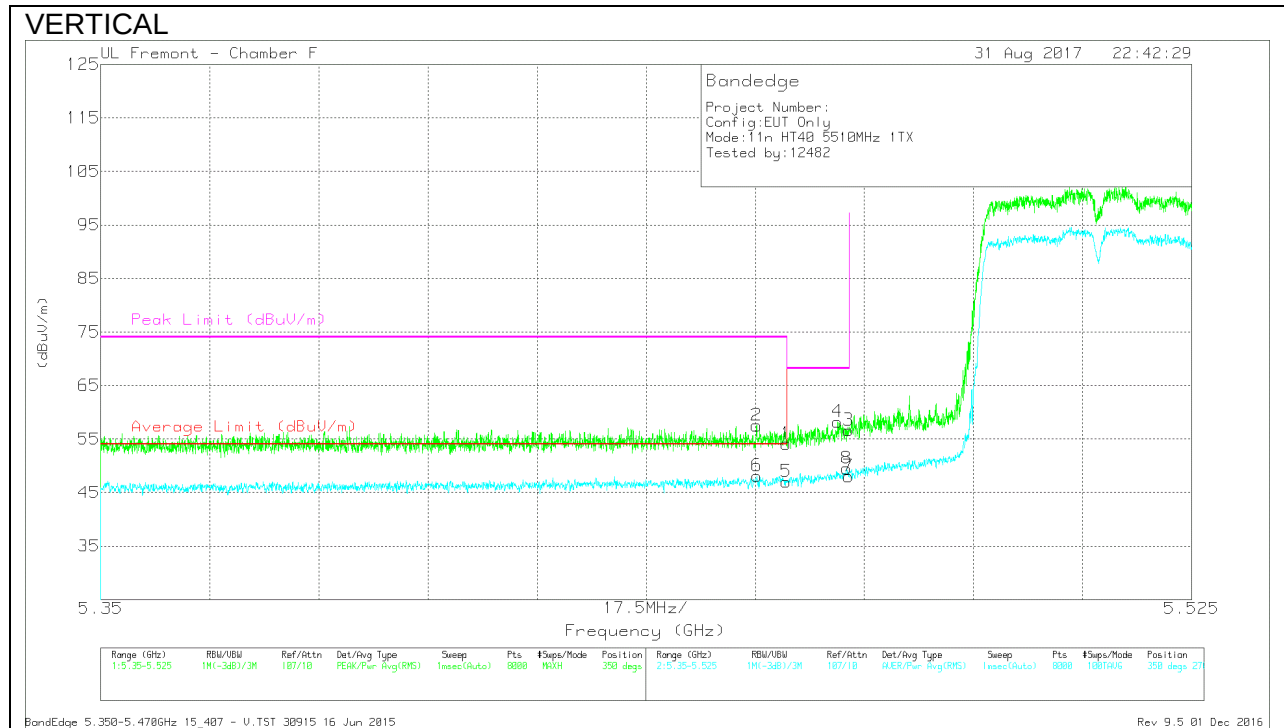


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.46	38.02	Pk	34.8	-18.7	0	54.12	-	-	74	-19.88	350	270	V
2	* 5.455	41.43	Pk	34.8	-18.7	0	57.53	-	-	74	-16.47	350	270	V
3	5.47	40.51	Pk	34.8	-18.7	0	56.61	-	-	68.2	-11.59	350	270	V
4	5.468	42.13	Pk	34.8	-18.7	0	58.23	-	-	68.2	-9.97	350	270	V
5	* 5.46	30.82	RMS	34.8	-18.7	.1	47.02	54	-6.98	-	-	350	270	V
6	* 5.455	31.92	RMS	34.8	-18.7	.1	48.12	54	-5.88	-	-	350	270	V
7	5.47	31.83	RMS	34.8	-18.7	.1	48.03	-	-	-	-	350	270	V
8	5.47	33.31	RMS	34.8	-18.7	.1	49.51	-	-	-	-	350	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

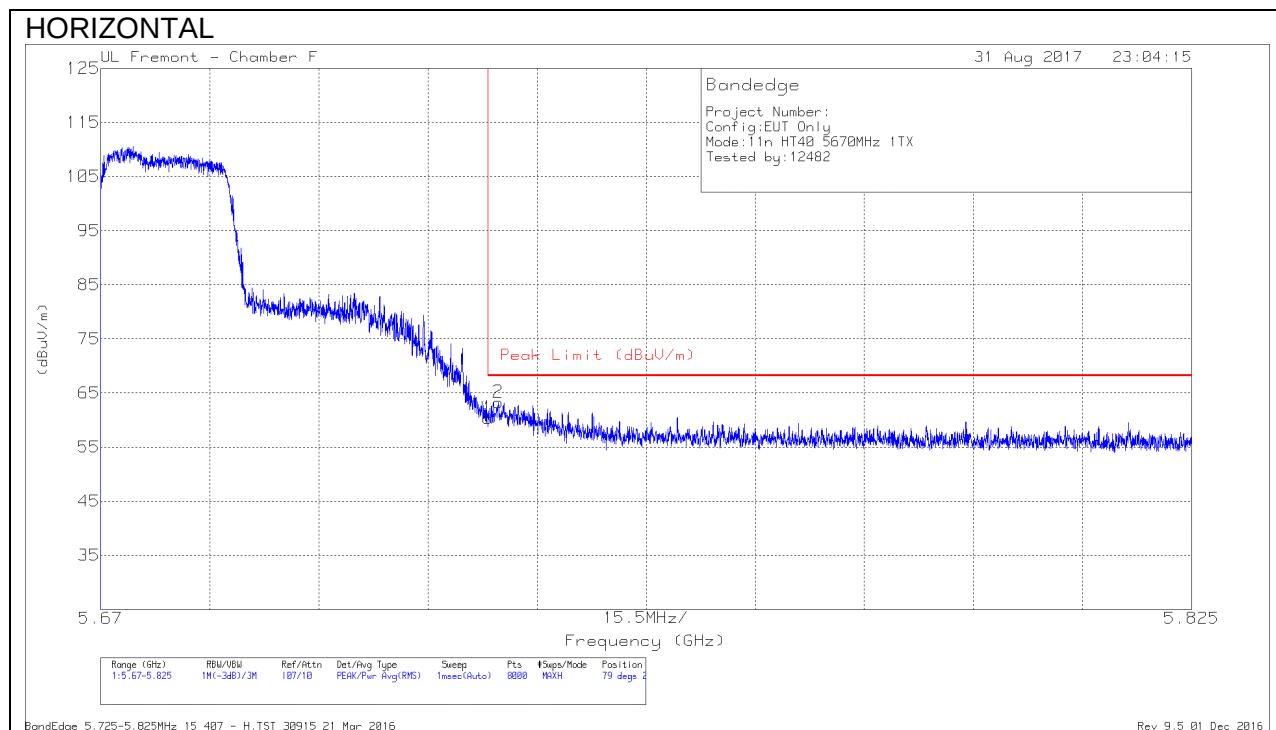


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb l/Filtr/P ad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.36	Pk	35	-18	0	60.36	68.2	-7.84	79	272	H
2	5.726	46.28	Pk	35	-18	0	63.28	68.2	-4.92	79	272	H

Pk - Peak detector

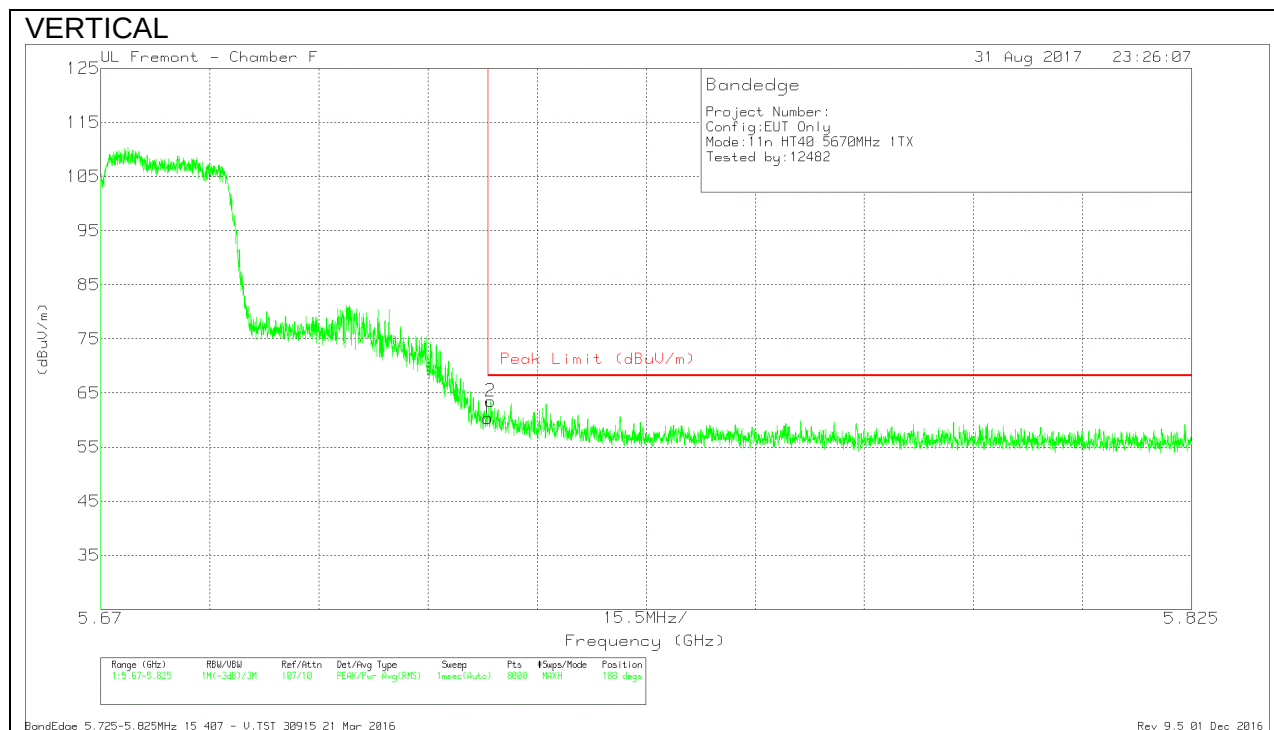

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb l/Filtr/P ad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.34	Pk	35	-18	0	60.34	68.2	-7.86	188	368	V
2	5.725	46.49	Pk	35	-18	0	63.49	68.2	-4.71	188	368	V

Pk - Peak detector

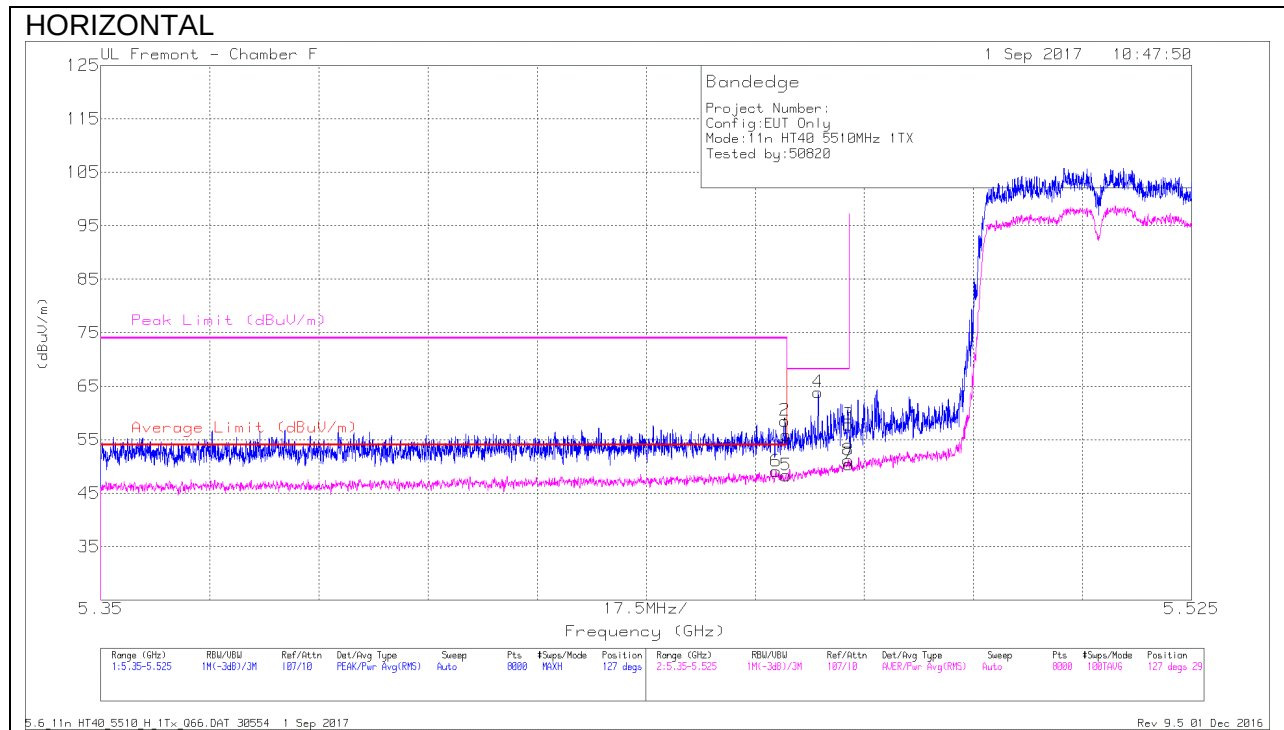
1TX Antenna B**BANDEDGE (LOW CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.79	Pk	34.8	-18.7	0	55.89	-	-	74	-18.11	127	291	H
2	* 5.46	42.44	Pk	34.8	-18.7	0	58.54	-	-	74	-15.46	127	291	H
3	5.47	41.74	Pk	34.8	-18.7	0	57.84	-	-	68.2	-10.36	127	291	H
4	5.465	47.77	Pk	34.8	-18.7	0	63.87	-	-	68.2	-4.33	127	291	H
5	* 5.46	32.23	RMS	34.8	-18.7	.1	48.43	54	-5.57	-	-	127	291	H
6	* 5.458	32.98	RMS	34.8	-18.7	.1	49.18	54	-4.82	-	-	127	291	H
7	5.47	34.29	RMS	34.8	-18.7	.1	50.49	-	-	-	-	127	291	H
8	5.47	35.04	RMS	34.8	-18.7	.1	51.24	-	-	-	-	127	291	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

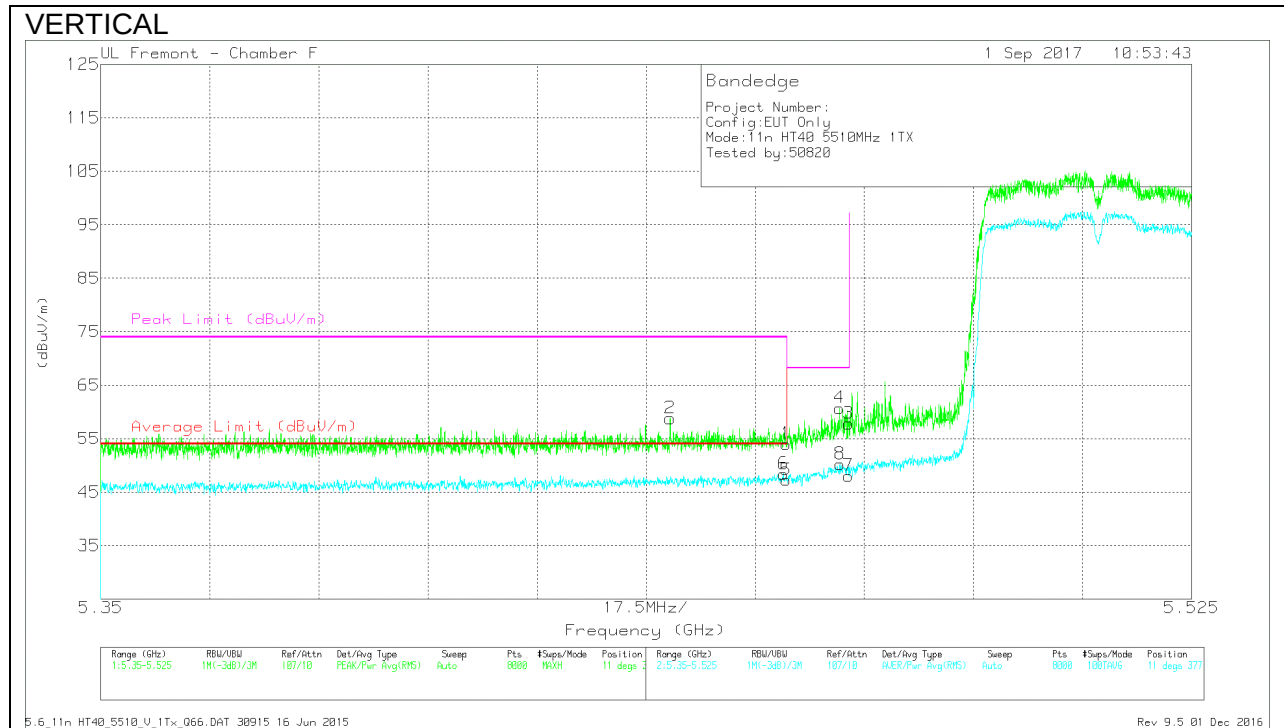


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.92	Pk	34.8	-18.7	0	54.02	-	-	74	-19.98	11	377	V
2	* 5.441	42.7	Pk	34.8	-18.7	0	58.8	-	-	74	-15.2	11	377	V
3	5.47	41.73	Pk	34.8	-18.7	0	57.83	-	-	68.2	-10.37	11	377	V
4	5.468	44.63	Pk	34.8	-18.7	0	60.73	-	-	68.2	-7.47	11	377	V
5	* 5.46	31.17	RMS	34.8	-18.7	.1	47.37	54	-6.63	-	-	11	377	V
6	* 5.459	32.28	RMS	34.8	-18.7	.1	48.48	54	-5.52	-	-	11	377	V
7	5.47	31.95	RMS	34.8	-18.7	.1	48.15	-	-	-	-	11	377	V
8	5.469	34.13	RMS	34.8	-18.7	.1	50.33	-	-	-	-	11	377	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

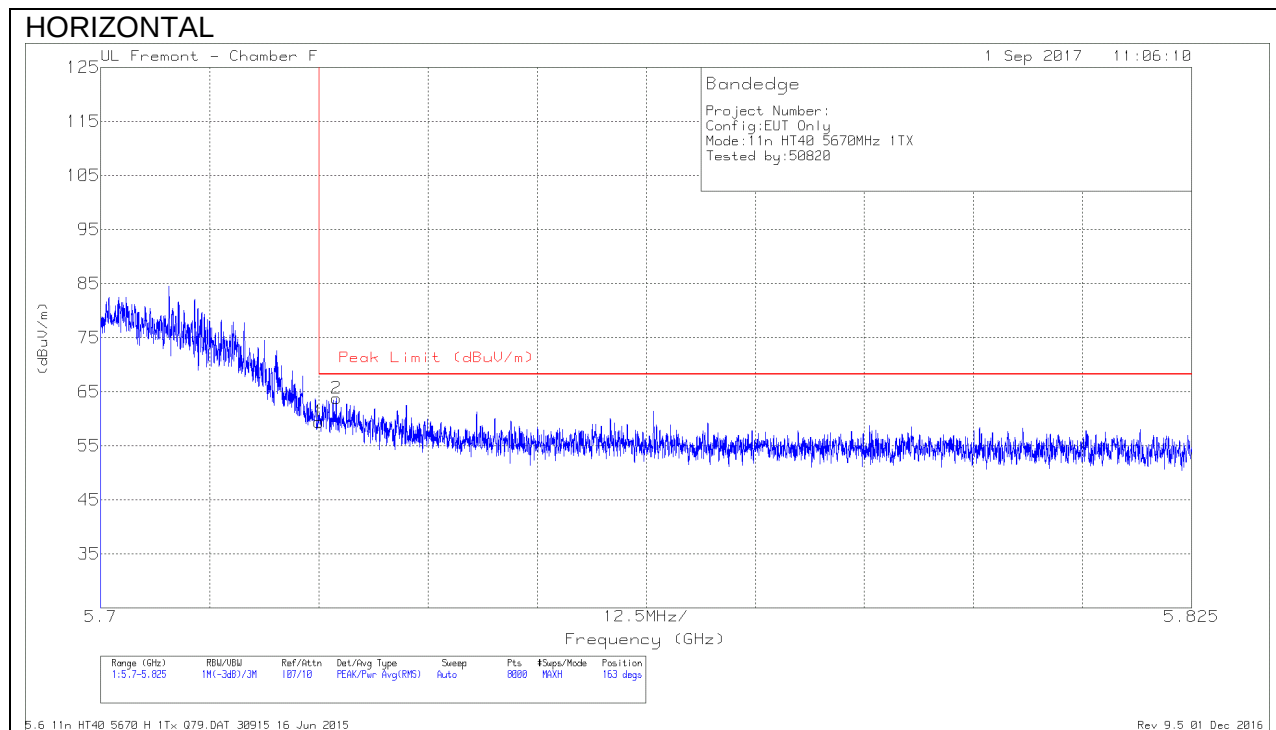


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.4	Pk	35	-18	0	59.4	68.2	-8.8	163	254	H
2	5.727	46.76	Pk	35	-18	0	63.76	68.2	-4.44	163	254	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

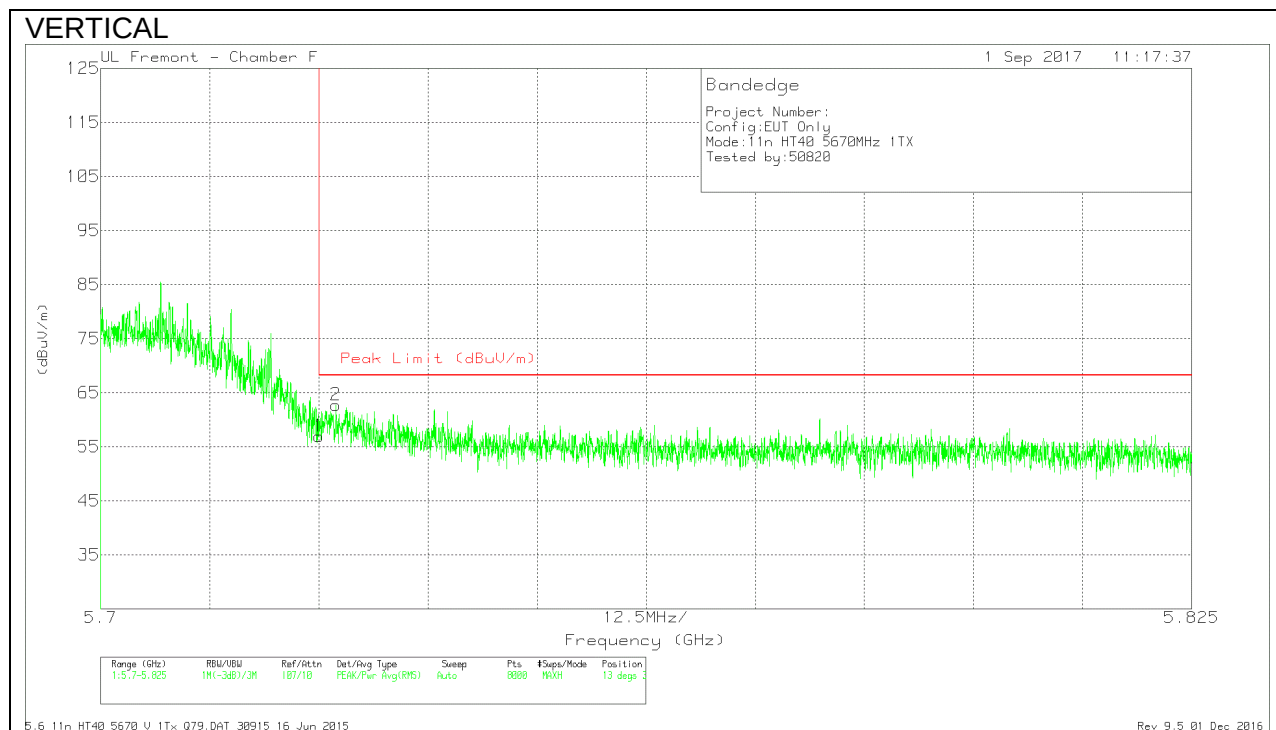

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	DC Corr (dB)	Correcte d Reading (dBuV/ m)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.93	Pk	35	-18	0	56.93	68.2	-11.27	13	355	V
2	5.727	45.73	Pk	35	-18	0	62.73	68.2	-5.47	13	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

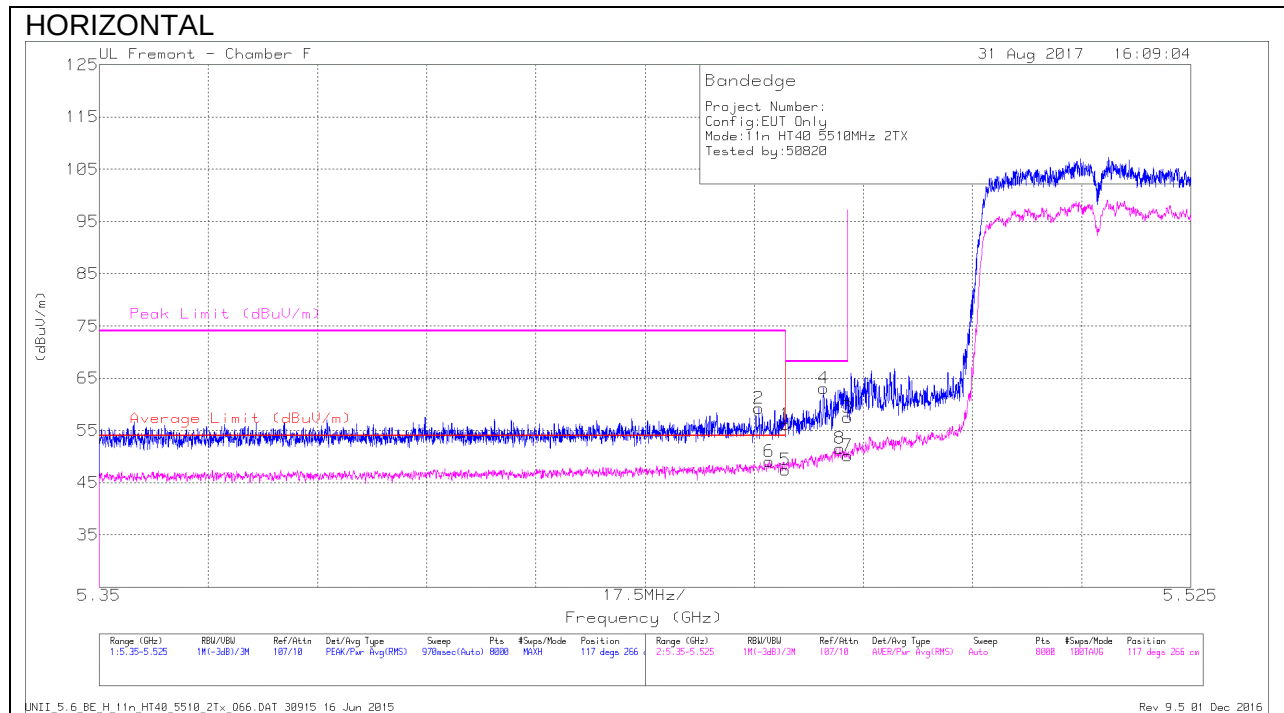
2TX Antenna A + Antenna B CDD MODE**BANDEDGE (LOW CHANNEL)**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.06	Pk	34.8	-18.7	0	56.16	-	-	74	-17.84	117	266	H
2	* 5.456	43.16	Pk	34.8	-18.7	0	59.26	-	-	74	-14.74	117	266	H
3	5.47	41.35	Pk	34.8	-18.7	0	57.45	-	-	68.2	-10.75	117	266	H
4	5.466	47.02	Pk	34.8	-18.7	0	63.12	-	-	68.2	-5.08	117	266	H
5	* 5.46	31.33	RMS	34.8	-18.7	.1	47.53	54	-6.47	-	-	117	266	H
6	* 5.457	33.09	RMS	34.8	-18.8	.1	49.19	54	-4.81	-	-	117	266	H
7	5.47	34.1	RMS	34.8	-18.7	.1	50.3	-	-	-	-	117	266	H
8	5.469	35.48	RMS	34.8	-18.7	.1	51.68	-	-	-	-	117	266	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

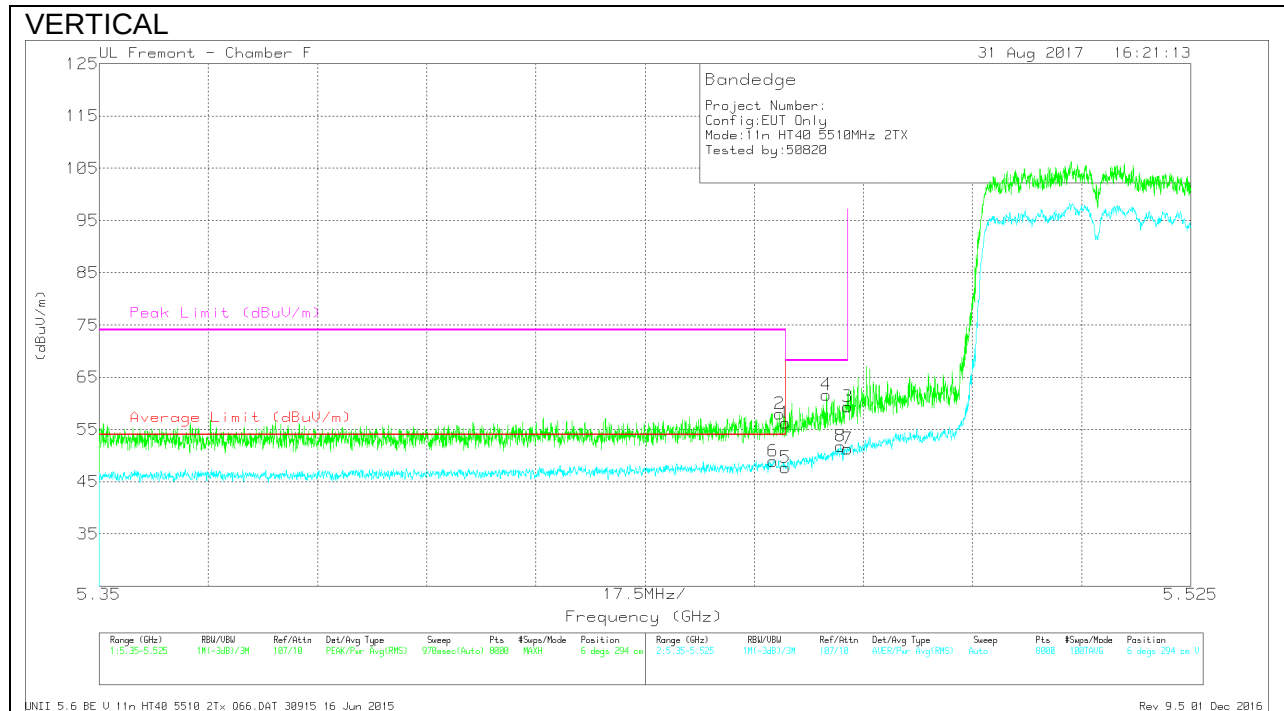


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.12	Pk	34.8	-18.7	0	56.22	-	-	74	-17.78	6	294	V
2	* 5.459	41.94	Pk	34.8	-18.7	0	58.04	-	-	74	-15.96	6	294	V
3	5.47	43.2	Pk	34.8	-18.7	0	59.3	-	-	68.2	-8.9	6	294	V
4	5.467	45.52	Pk	34.8	-18.7	0	61.62	-	-	68.2	-6.58	6	294	V
5	* 5.46	31.53	RMS	34.8	-18.7	.1	47.73	54	-6.27	-	-	6	294	V
6	* 5.458	32.86	RMS	34.8	-18.7	.1	49.06	54	-4.94	-	-	6	294	V
7	5.47	35.16	RMS	34.8	-18.7	.1	51.36	-	-	-	-	6	294	V
8	5.469	35.66	RMS	34.8	-18.7	.1	51.86	-	-	-	-	6	294	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

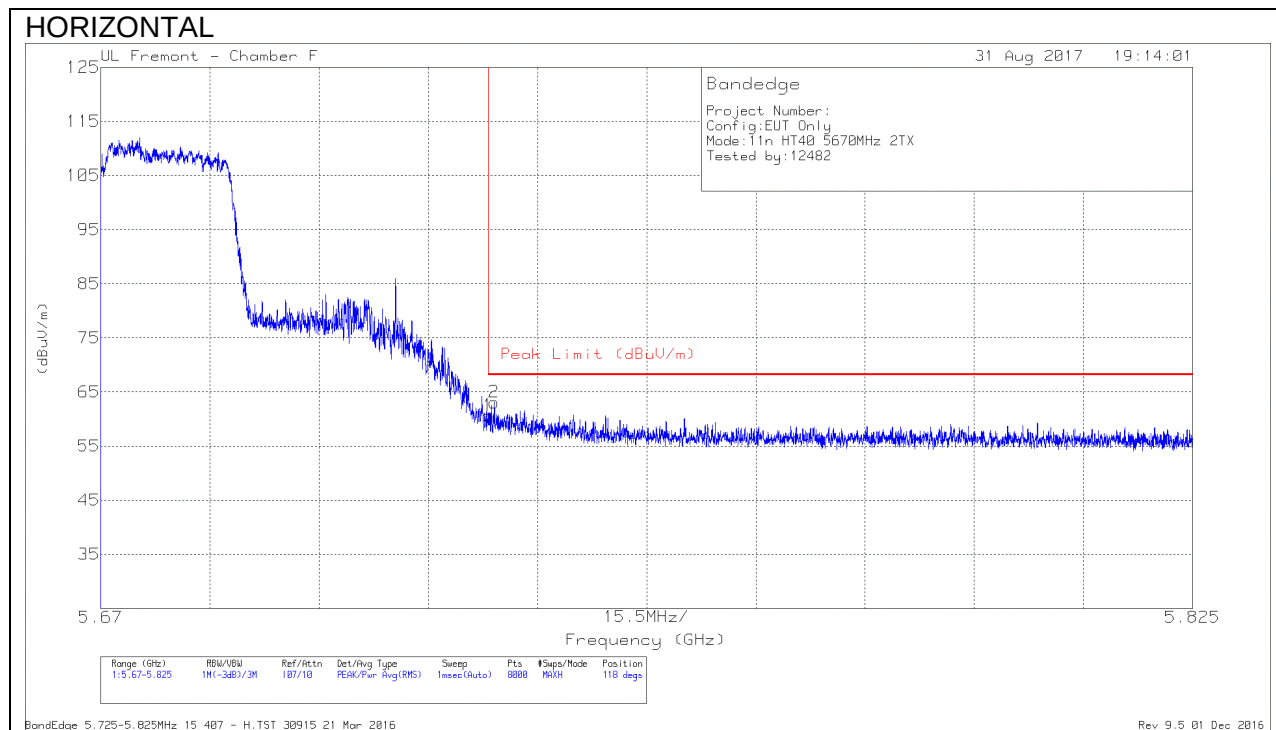

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb l/Filtr/P ad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.6	Pk	35	-18	0	60.6	68.2	-7.6	118	287	H
2	5.726	46.09	Pk	35	-18	0	63.09	68.2	-5.11	118	287	H

Pk - Peak detector


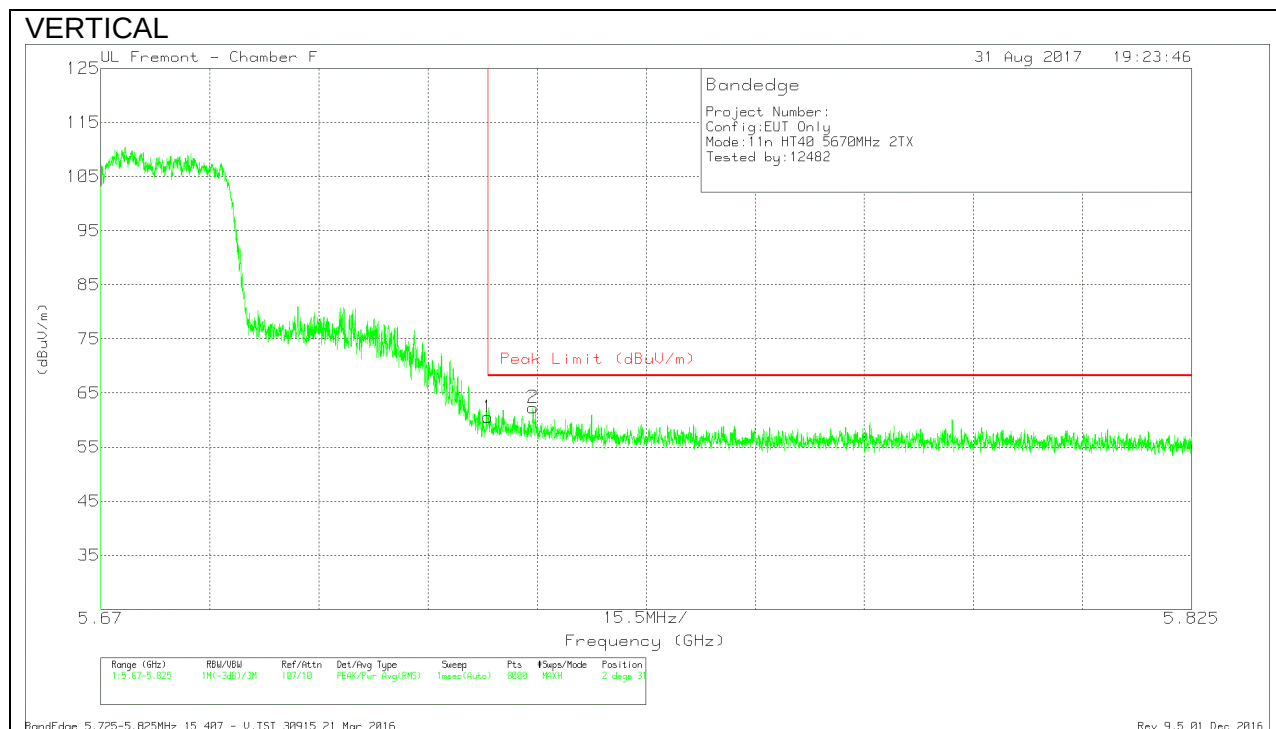


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb l/Filtr/P ad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.56	Pk	35	-18	0	60.56	68.2	-7.64	2	319	V
2	5.731	45.3	Pk	35	-18	0	62.3	68.2	-5.9	2	319	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

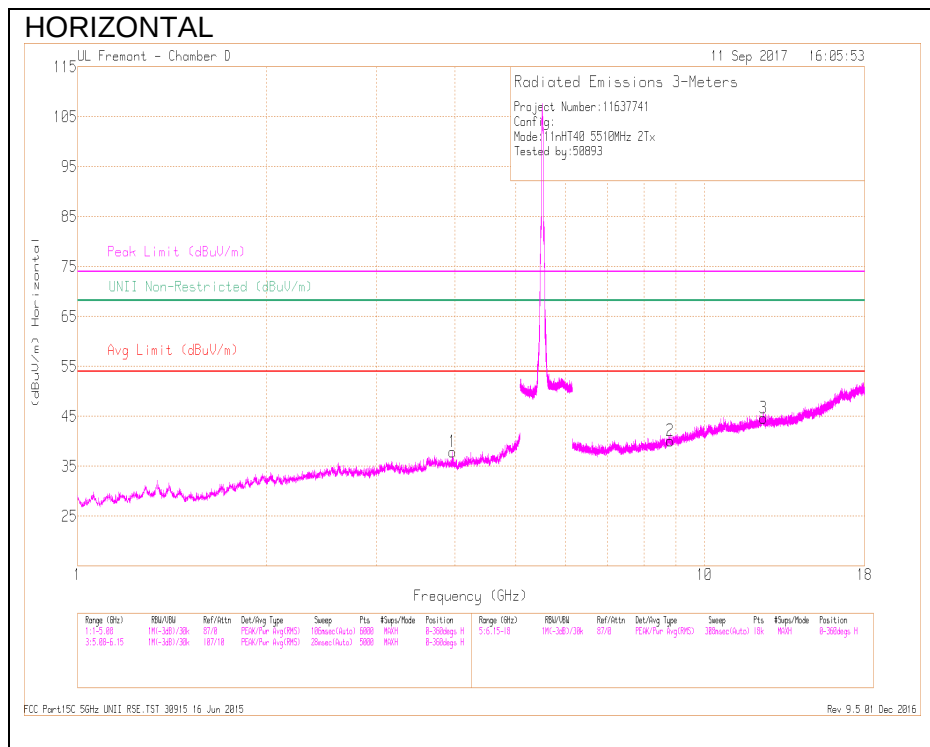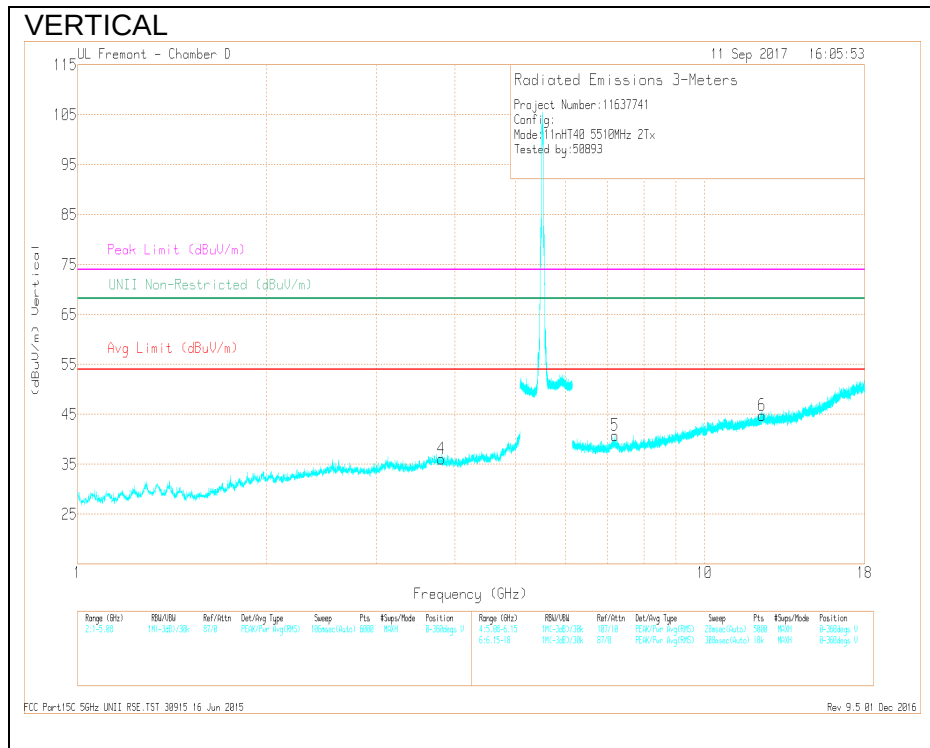

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 3.961	37.98	PK-U	33.4	-28.1	0	43.28	-	-	74	-30.72	-	-	181	249	H
	* 3.961	26.44	ADR	33.4	-28.1	.1	31.84	54	-22.16	-	-	-	-	181	249	H
4	* 3.8	38.31	PK-U	33.1	-28.6	0	42.81	-	-	74	-31.19	-	-	0	176	V
	* 3.802	26.7	ADR	33.1	-28.6	.1	31.3	54	-22.7	-	-	-	-	0	176	V
3	* 12.406	34.19	PK-U	38.9	-21	0	52.09	-	-	74	-21.91	-	-	349	348	H
	* 12.426	22.65	ADR	38.9	-21.5	.1	40.15	54	-13.85	-	-	-	-	349	348	H
6	* 12.354	34.71	PK-U	38.9	-20.9	0	52.71	-	-	74	-21.29	-	-	61	142	V
	* 12.326	22.91	ADR	38.8	-21.7	.1	40.11	54	-13.89	-	-	-	-	61	142	V
5	7.213	35.35	PK-U	35.5	-24	0	46.85	-	-	-	-	68.2	-21.35	73	270	V
2	8.802	34.93	PK-U	35.9	-22.8	0	48.03	-	-	-	-	68.2	-20.17	167	301	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

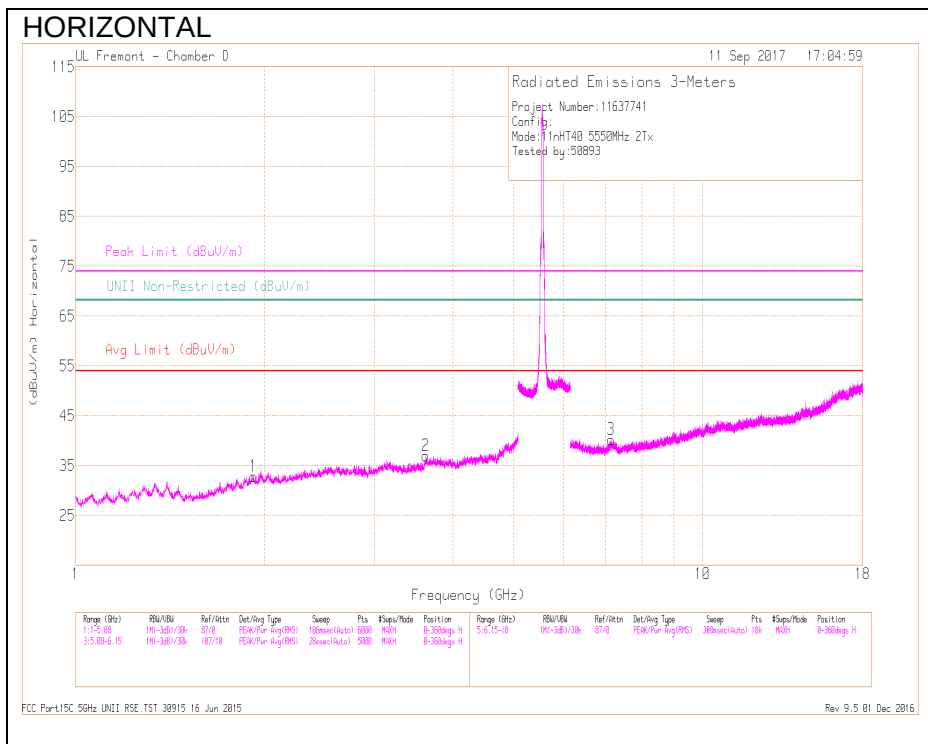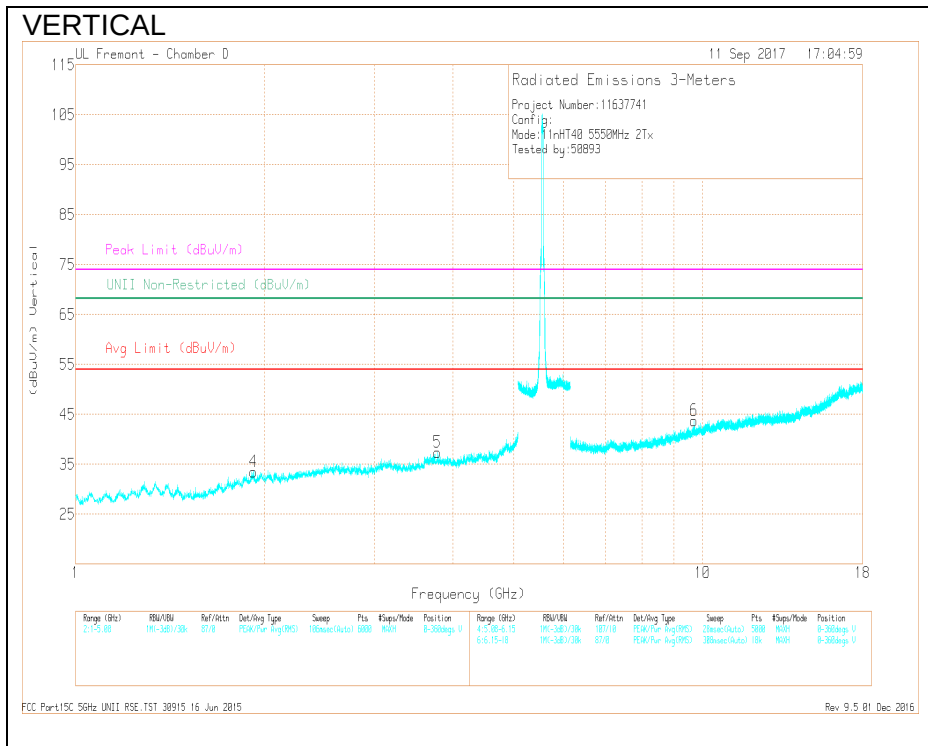

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.617	38.69	PK-U	33.1	-29	0	42.79	-	-	74	-31.21	-	-	151	343	H
	* 3.62	26.9	ADR	33.1	-29	.1	31.1	54	-22.9	-	-	-	-	151	343	H
5	* 3.781	38.26	PK-U	33.1	-28.6	0	42.76	-	-	74	-31.24	-	-	339	198	V
	* 3.781	26.91	ADR	33.1	-28.6	.1	31.51	54	-22.49	-	-	-	-	339	198	V
1	1.922	40.55	PK-U	31.3	-31.3	0	40.55	-	-	-	-	68.2	-27.65	195	239	H
4	1.922	41.06	PK-U	31.3	-31.3	0	41.06	-	-	-	-	68.2	-27.14	195	368	V
3	7.158	35.82	PK-U	35.5	-23.9	0	47.42	-	-	-	-	68.2	-20.78	224	119	H
6	9.685	34.3	PK-U	36.7	-21.7	0	49.3	-	-	-	-	68.2	-18.9	72	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

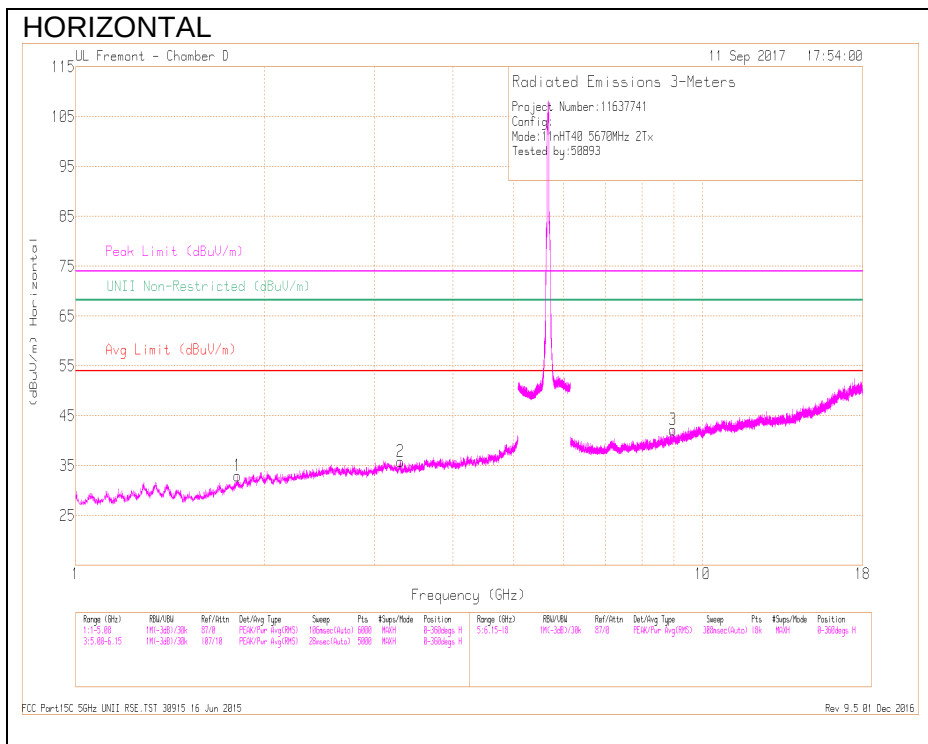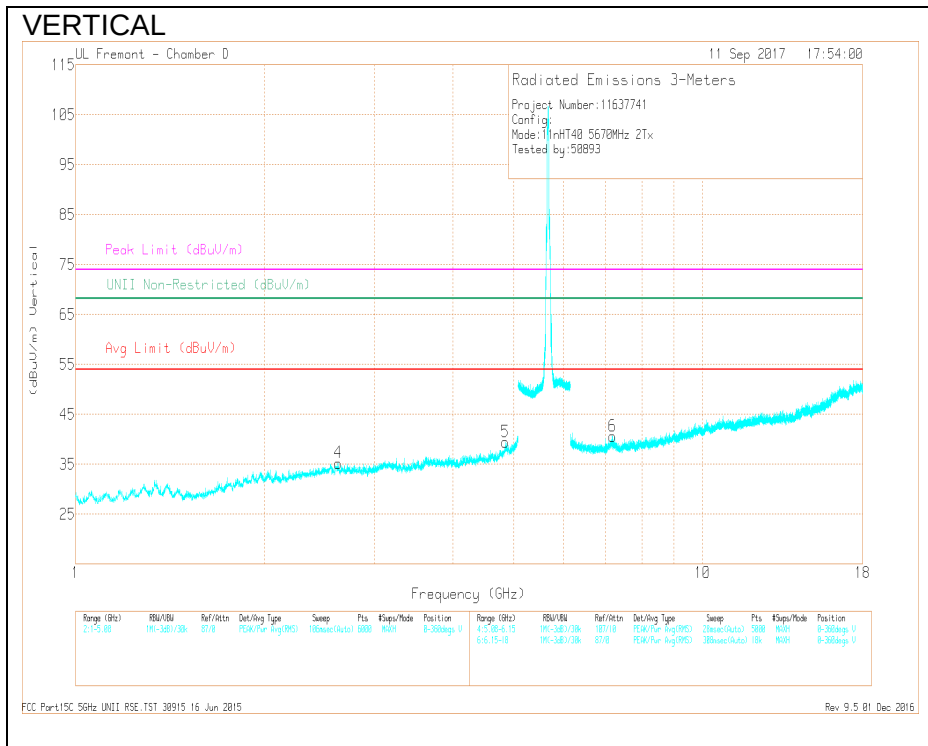

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 4.85	37.55	PK-U	34	-25.8	0	45.75	-	-	74	-28.25	-	-	244	147	V
	* 4.85	25.48	ADR	34	-25.8	.1	33.78	54	-20.22	-	-	-	-	244	147	V
1	1.816	41.07	PK-U	30.5	-31.3	0	40.27	-	-	-	-	68.2	-27.93	78	151	H
	1.812	28.57	ADR	30.4	-31.2	.1	27.87	-	-	-	-	-	-	78	151	H
	1.816	41.07	PK-U	30.5	-31.3	0	40.27	-	-	-	-	68.2	-27.93	78	151	H
4	2.622	39.53	PK-U	32.7	-29.9	0	42.33	-	-	-	-	68.2	-25.87	339	166	V
2	3.298	39.47	PK-U	32.8	-29.3	0	42.97	-	-	-	-	68.2	-25.23	223	274	H
6	7.173	35.45	PK-U	35.5	-24.2	0	46.75	-	-	-	-	68.2	-21.45	3	212	V
3	8.953	35.17	PK-U	36	-22.8	0	48.37	-	-	-	-	68.2	-19.83	85	239	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

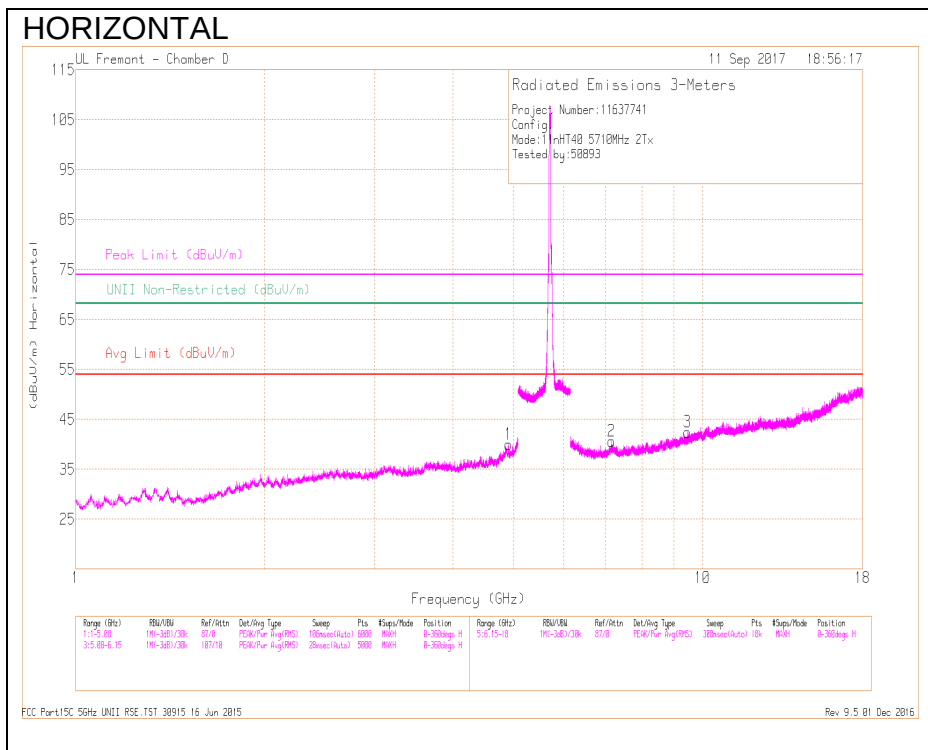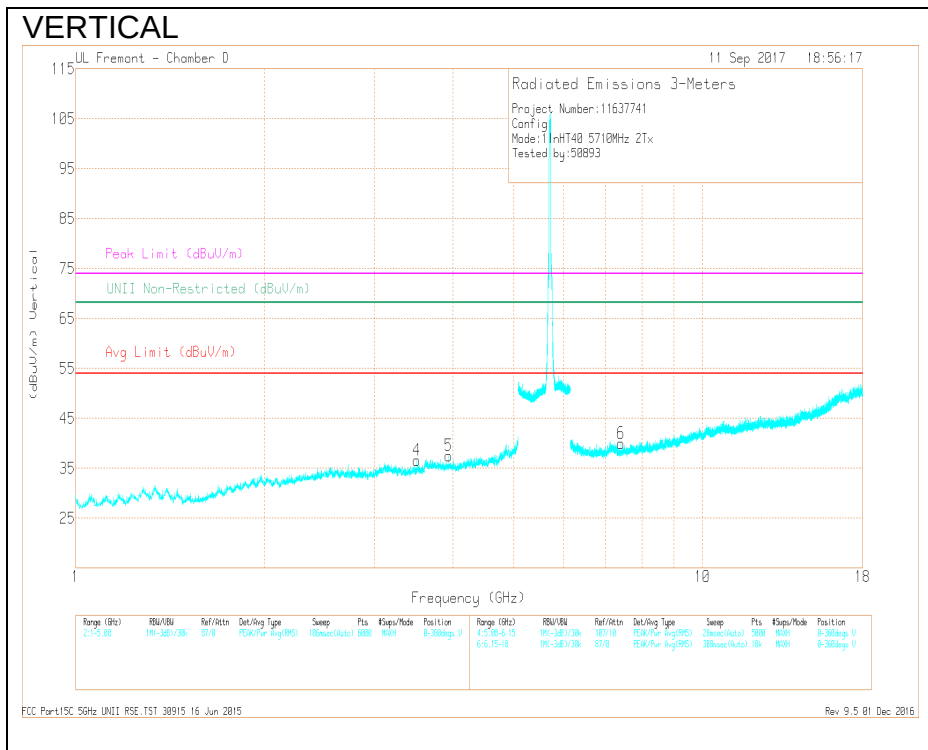

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fld (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 4.911	37.67	PK-U	34	-26.4	0	45.27	-	-	74	-28.73	-	-	205	103	H
	* 4.921	25.89	ADR	34.1	-26.4	.1	33.69	54	-20.31	-	-	-	-	205	103	H
4	* 3.503	38.93	PK-U	33	-28.7	0	43.23	-	-	74	-30.77	-	-	260	126	V
	* 3.506	26.81	ADR	33	-28.6	.1	31.31	54	-22.69	-	-	-	-	260	126	V
5	* 3.953	38.15	PK-U	33.4	-27.9	0	43.65	-	-	74	-30.35	-	-	244	265	V
	* 3.949	26.58	ADR	33.4	-28.1	.1	31.98	54	-22.02	-	-	-	-	244	265	V
2	* 9.46	34.57	PK-U	36.4	-21.6	0	49.37	-	-	74	-24.63	-	-	3	196	H
	* 9.444	22.22	ADR	36.4	-21.6	.1	37.12	54	-16.88	-	-	-	-	3	196	H
6	* 7.396	35.82	PK-U	35.5	-25.3	0	46.02	-	-	74	-27.98	-	-	182	351	V
	* 7.404	24.17	ADR	35.5	-25.2	.1	34.57	54	-19.43	-	-	-	-	182	351	V
3	7.146	35.51	PK-U	35.5	-24	0	47.01	-	-	-	-	68.2	-21.19	121	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

11.1.9. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX Antenna A

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

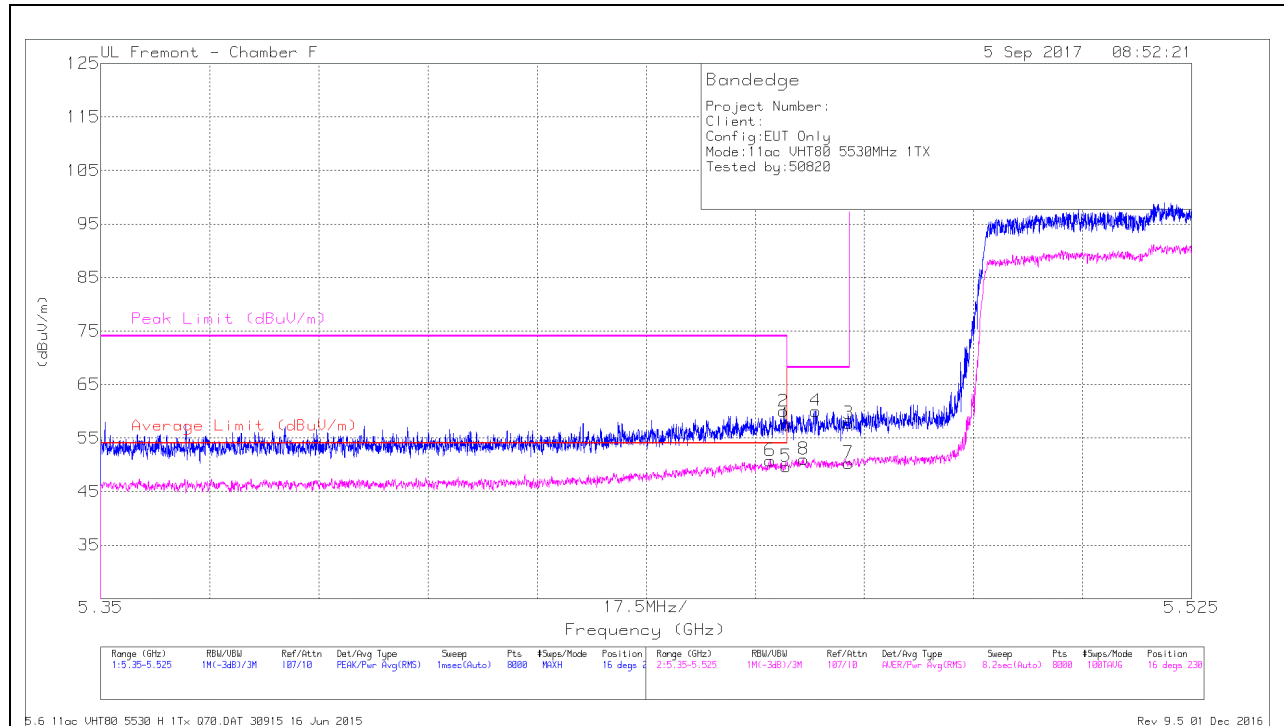


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.43	Pk	34.8	-18.7	0	57.53	-	-	74	-16.47	16	230	H
2	* 5.46	43.9	Pk	34.8	-18.7	0	60	-	-	74	-14	16	230	H
3	5.47	41.63	Pk	34.8	-18.7	0	57.73	-	-	68.2	-10.47	16	230	H
4	5.465	43.97	Pk	34.8	-18.7	0	60.07	-	-	68.2	-8.13	16	230	H
5	* 5.46	33.59	RMS	34.8	-18.7	.19	49.88	54	-4.12	-	-	16	230	H
6	* 5.457	34.77	RMS	34.8	-18.8	.19	50.96	54	-3.04	-	-	16	230	H
7	5.47	34.21	RMS	34.8	-18.7	.19	50.50	-	-	-	-	16	230	H
8	5.463	34.92	RMS	34.8	-18.7	.19	51.21	-	-	-	-	16	230	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


VERTICAL RESULT

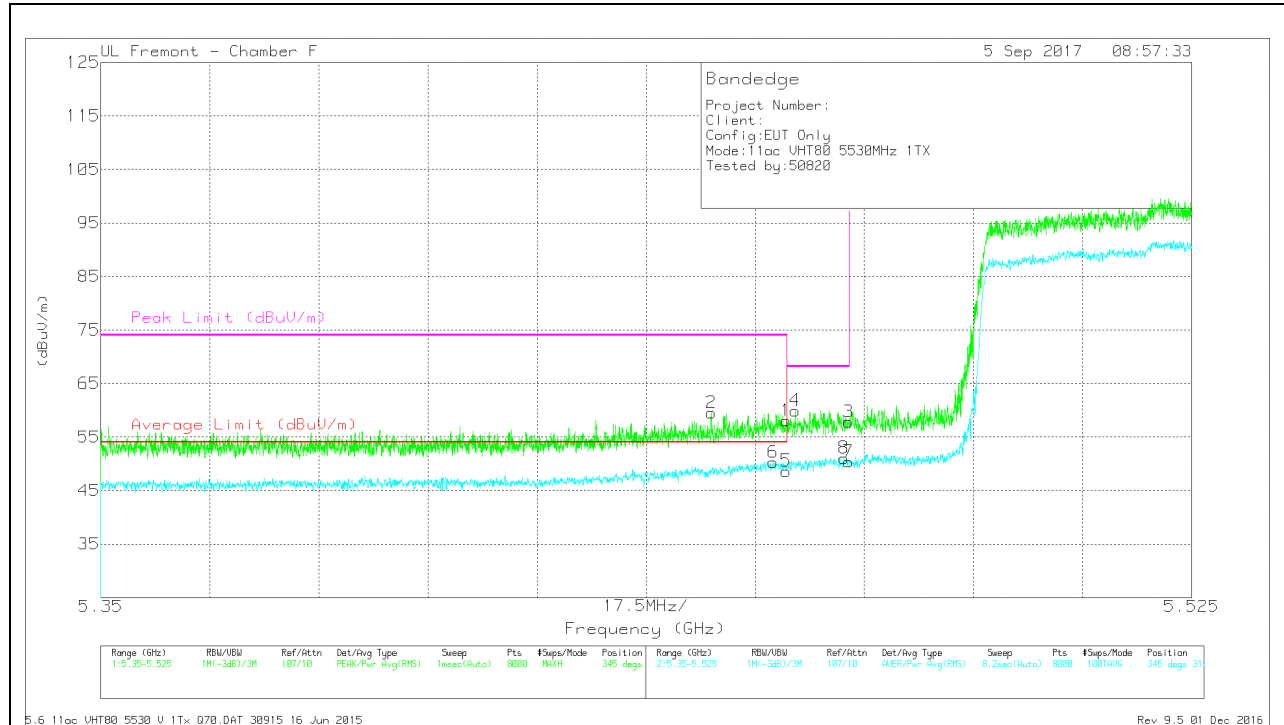

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb I/Ftr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.94	Pk	34.8	-18.7	0	58.04	-	-	74	-15.96	345	312	V
2	* 5.448	43.41	Pk	34.8	-18.7	0	59.51	-	-	74	-14.49	345	312	V
3	5.47	41.71	Pk	34.8	-18.7	0	57.81	-	-	68.2	-10.39	345	312	V
4	5.461	43.82	Pk	34.8	-18.7	0	59.92	-	-	68.2	-8.28	345	312	V
5	* 5.46	32.51	RMS	34.8	-18.7	.19	48.80	54	-5.20	-	-	345	312	V
6	* 5.458	34.15	RMS	34.8	-18.7	.19	50.44	54	-3.56	-	-	345	312	V
7	5.47	34.27	RMS	34.8	-18.7	.19	50.56	-	-	-	-	345	312	V
8	5.469	34.92	RMS	34.8	-18.7	.19	51.21	-	-	-	-	345	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection


HORIZONTAL RESULT

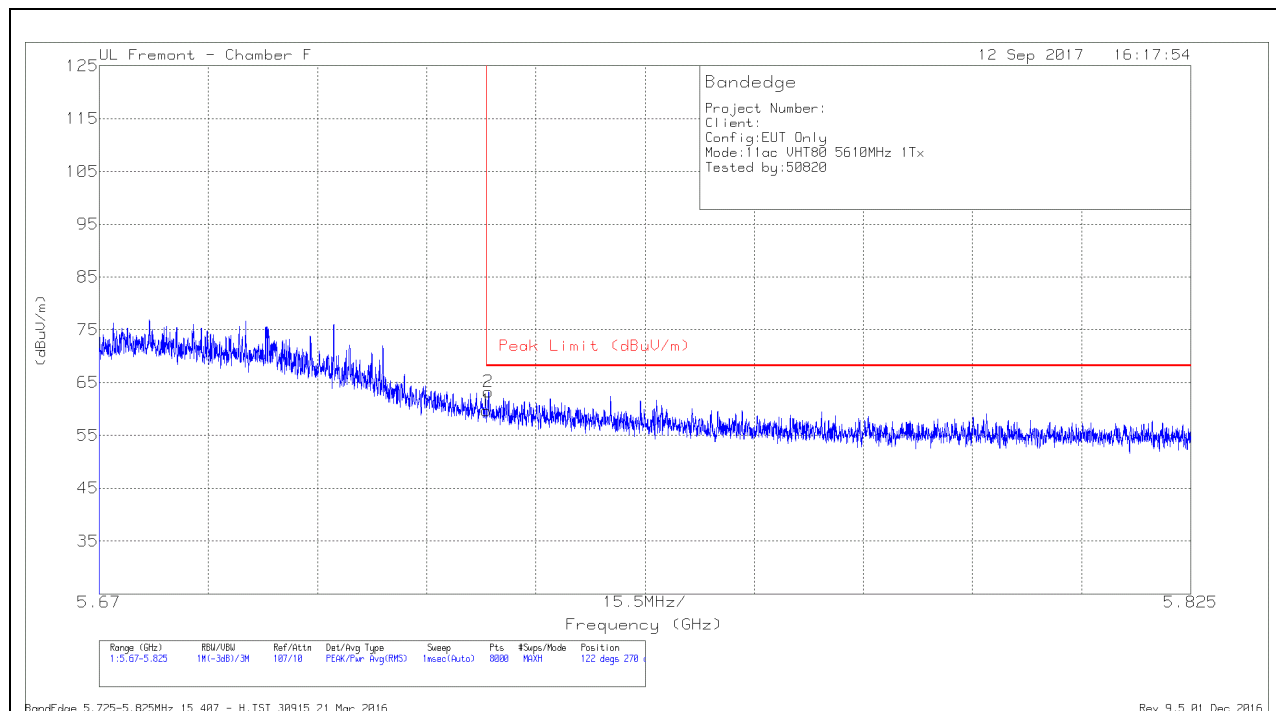

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.7	Pk	35	-18	59.7	68.2	-8.5	122	270	H
2	5.725	46.26	Pk	35	-18	63.26	68.2	-4.94	122	270	H

Pk - Peak detector

VERTICAL RESULT

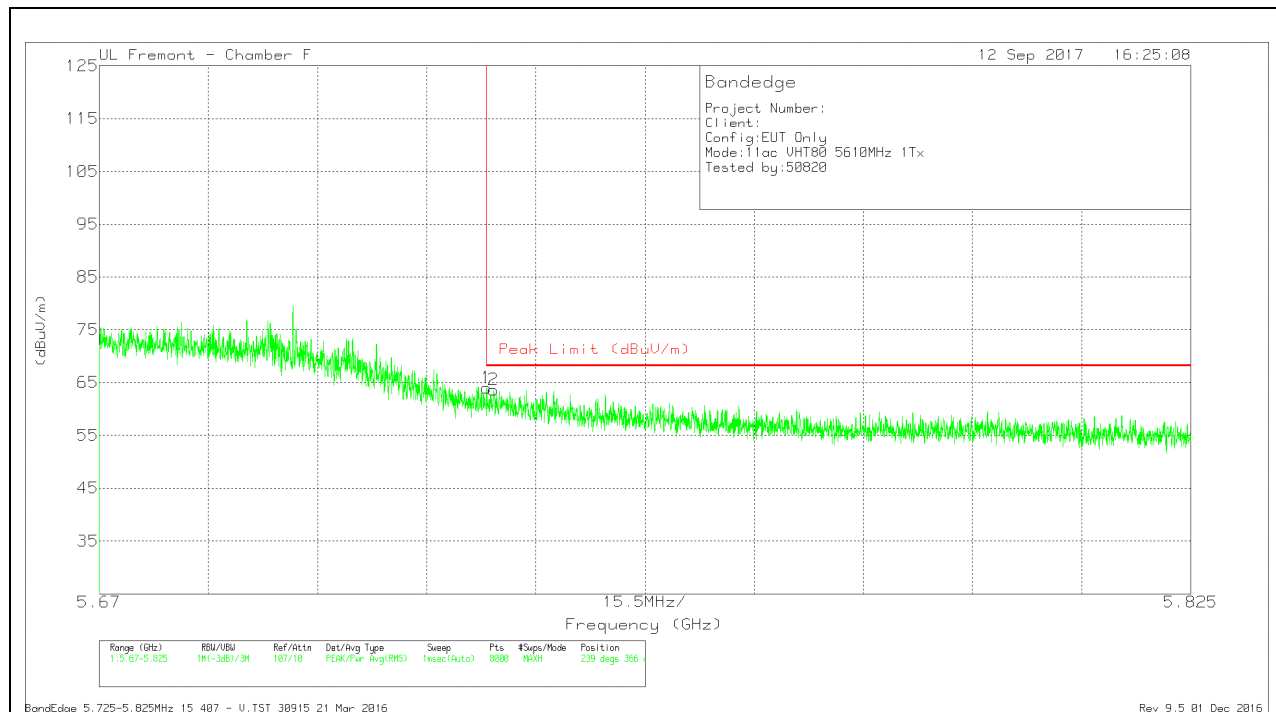


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.97	Pk	35	-18	63.97	68.2	-4.23	239	366	V
2	5.726	46.66	Pk	35	-18	63.66	68.2	-4.54	239	366	V

Pk - Peak detector

1TX Antenna B

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

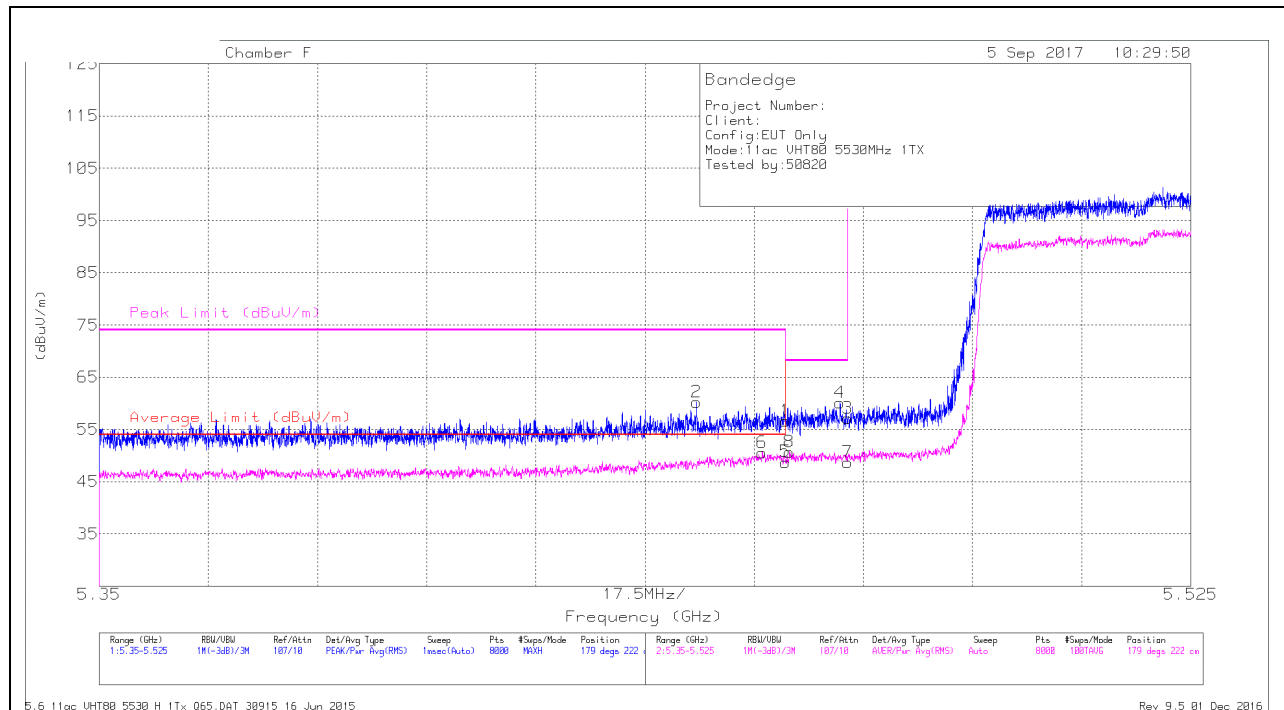


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.56	Pk	34.8	-18.7	0	56.66	-	-	74	-17.34	179	222	H
2	* 5.446	44.17	Pk	34.8	-18.8	0	60.17	-	-	74	-13.83	179	222	H
3	5.47	41	Pk	34.8	-18.7	0	57.1	-	-	68.2	-11.1	179	222	H
4	5.469	44.04	Pk	34.8	-18.7	0	60.14	-	-	68.2	-8.06	179	222	H
5	* 5.46	32.64	RMS	34.8	-18.7	0.19	48.93	54	-5.07	-	-	179	222	H
6	* 5.456	34.46	RMS	34.8	-18.7	0.19	50.75	54	-3.25	-	-	179	222	H
7	5.47	32.62	RMS	34.8	-18.7	0.19	48.91	-	-	-	-	179	222	H
8	5.461	34.55	RMS	34.8	-18.7	0.19	50.84	-	-	-	-	179	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

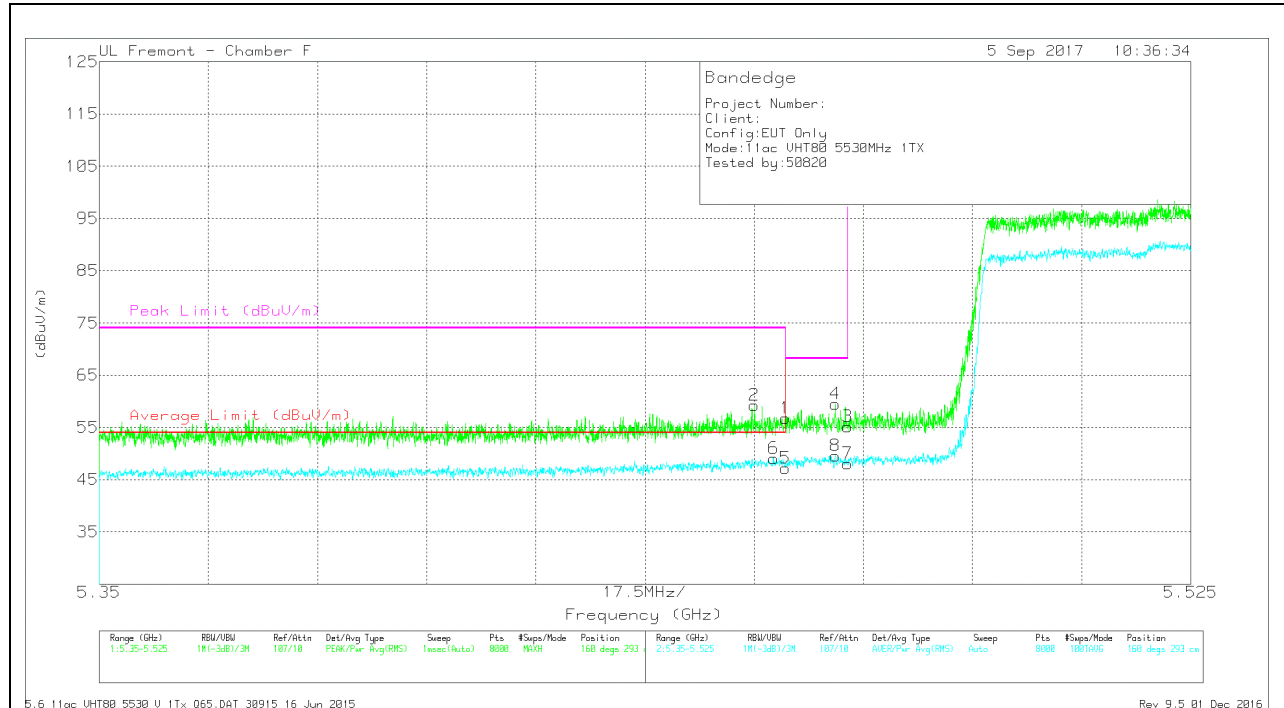


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.66	Pk	34.8	-18.7	0	56.76	-	-	74	-17.24	160	293	V
2	* 5.455	43.12	Pk	34.8	-18.7	0	59.22	-	-	74	-14.78	160	293	V
3	5.47	39.08	Pk	34.8	-18.7	0	55.18	-	-	68.2	-13.02	160	293	V
4	5.468	43.45	Pk	34.8	-18.8	0	59.45	-	-	68.2	-8.75	160	293	V
5	* 5.46	31.11	RMS	34.8	-18.7	0.19	47.40	54	-6.60	-	-	160	293	V
6	* 5.458	32.95	RMS	34.8	-18.7	0.19	49.24	54	-4.76	-	-	160	293	V
7	5.47	31.97	RMS	34.8	-18.7	0.19	48.26	-	-	-	-	160	293	V
8	5.468	33.6	RMS	34.8	-18.8	0.19	49.79	-	-	-	-	160	293	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


HORIZONTAL RESULT

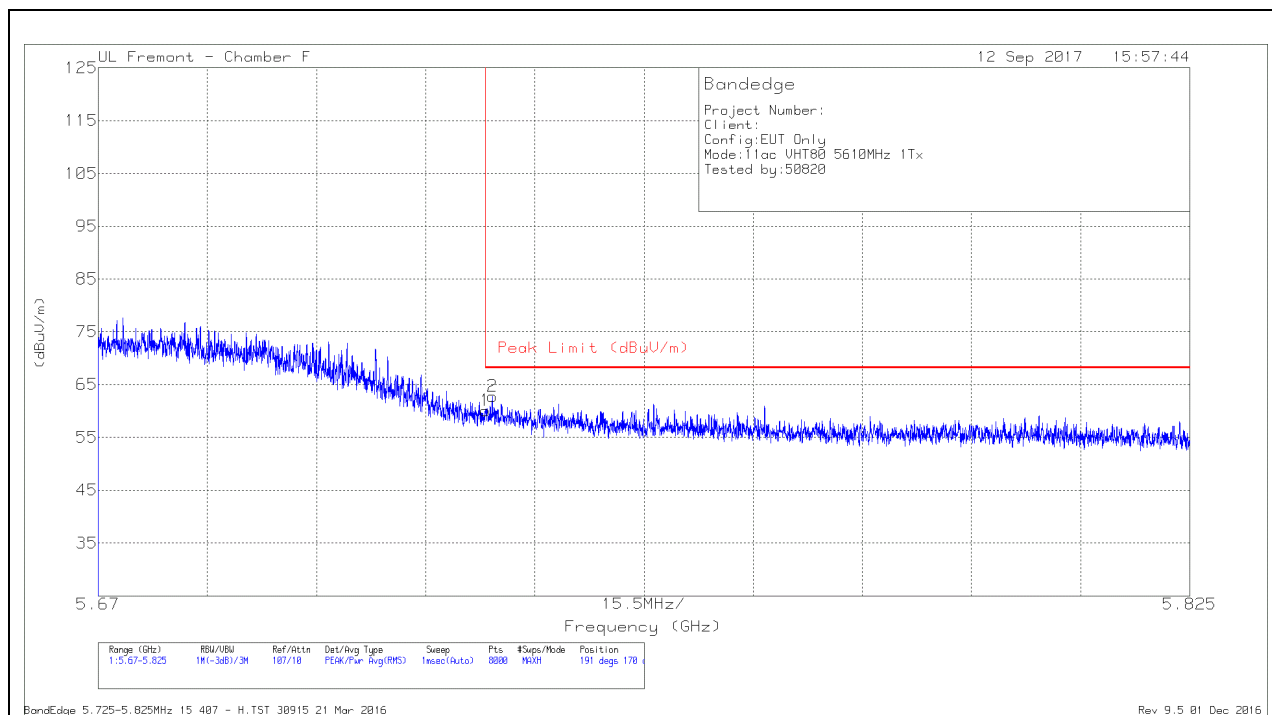

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.03	Pk	35	-18	60.03	68.2	-8.17	191	170	H
2	5.726	45.79	Pk	35	-18	62.79	68.2	-5.41	191	170	H


Pk - Peak detector

VERTICAL RESULT

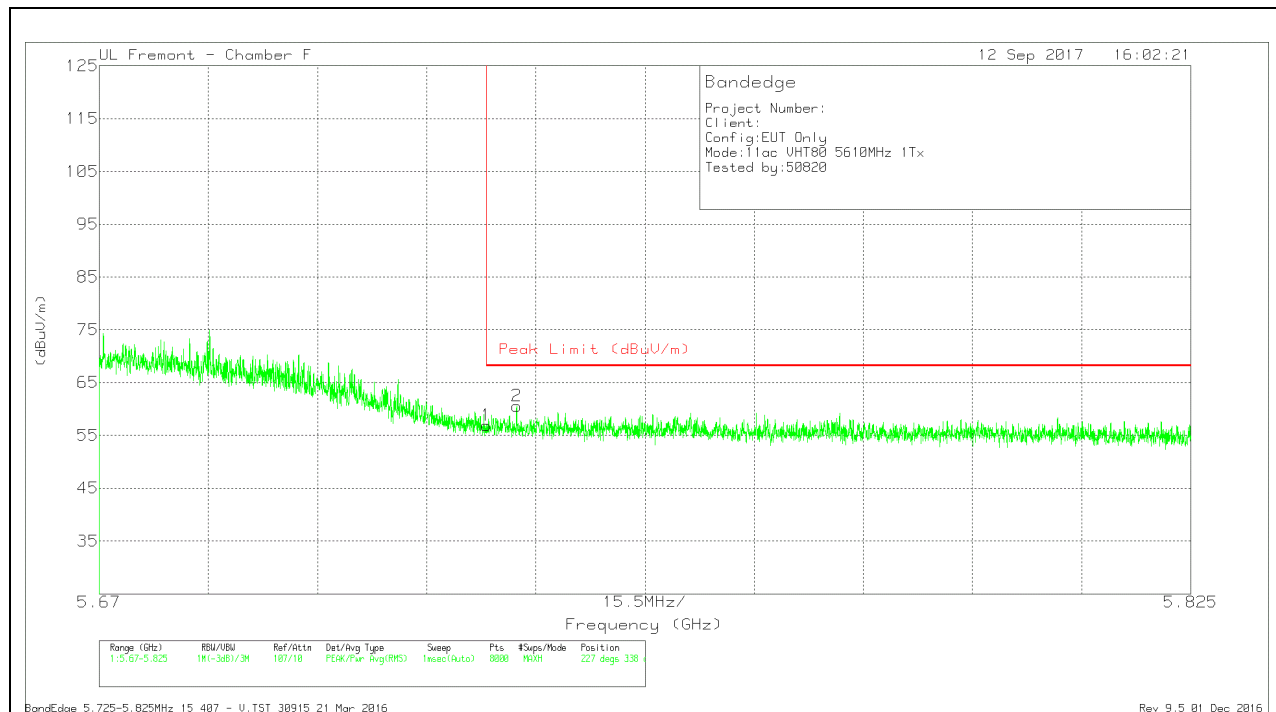

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.92	Pk	35	-18	56.92	68.2	-11.28	227	338	V
2	5.729	43.55	Pk	35	-18	60.55	68.2	-7.65	227	338	V

Pk - Peak detector

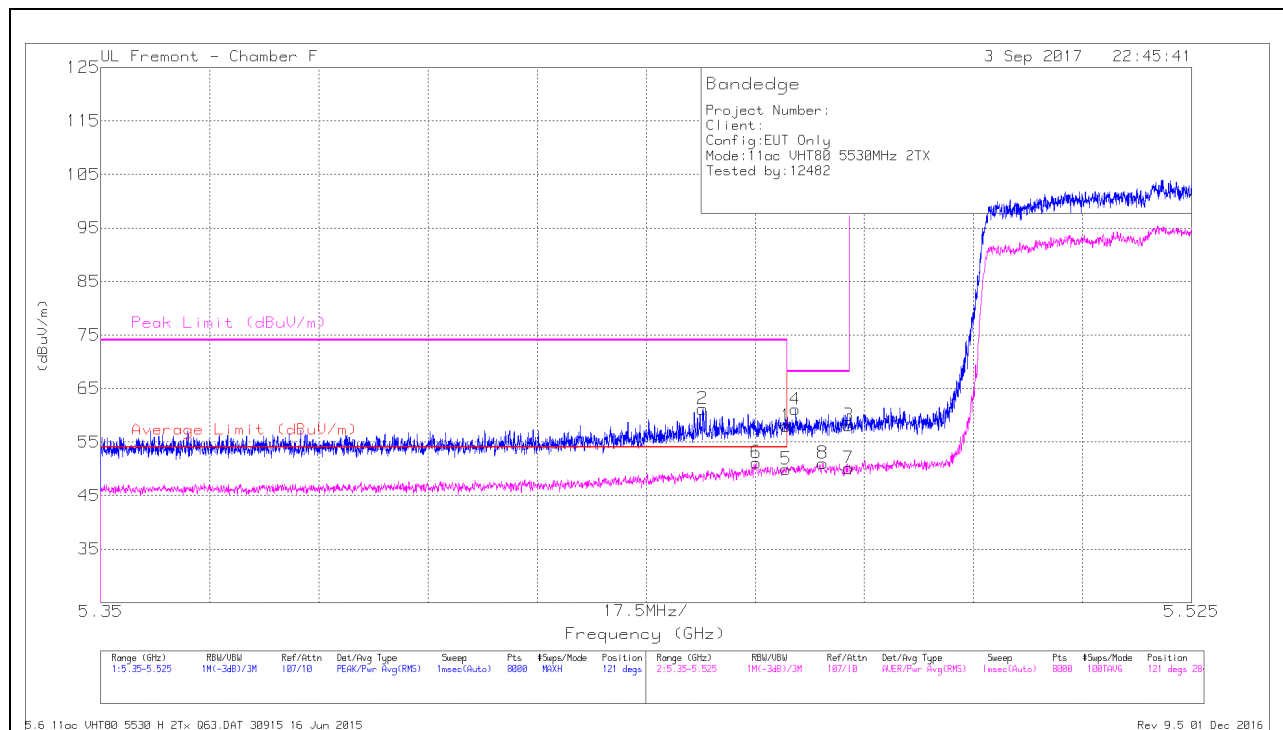2TX Antenna A + Antenna B CDD MODE**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.46	41.87	Pk	34.8	-18.7	0	57.97	-	-	74	-16.03	121	284	H
2	* 5.447	45.18	Pk	34.8	-18.8	0	61.18	-	-	74	-12.82	121	284	H
3	5.47	41.98	Pk	34.8	-18.7	0	58.08	-	-	68.2	-10.12	121	284	H
4	5.461	44.99	Pk	34.8	-18.7	0	61.09	-	-	68.2	-7.11	121	284	H
5	* 5.46	33.63	RMS	34.8	-18.7	.19	49.92	54	-4.08	-	-	121	284	H
6	* 5.455	34.85	RMS	34.8	-18.7	.19	51.14	54	-2.86	-	-	121	284	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

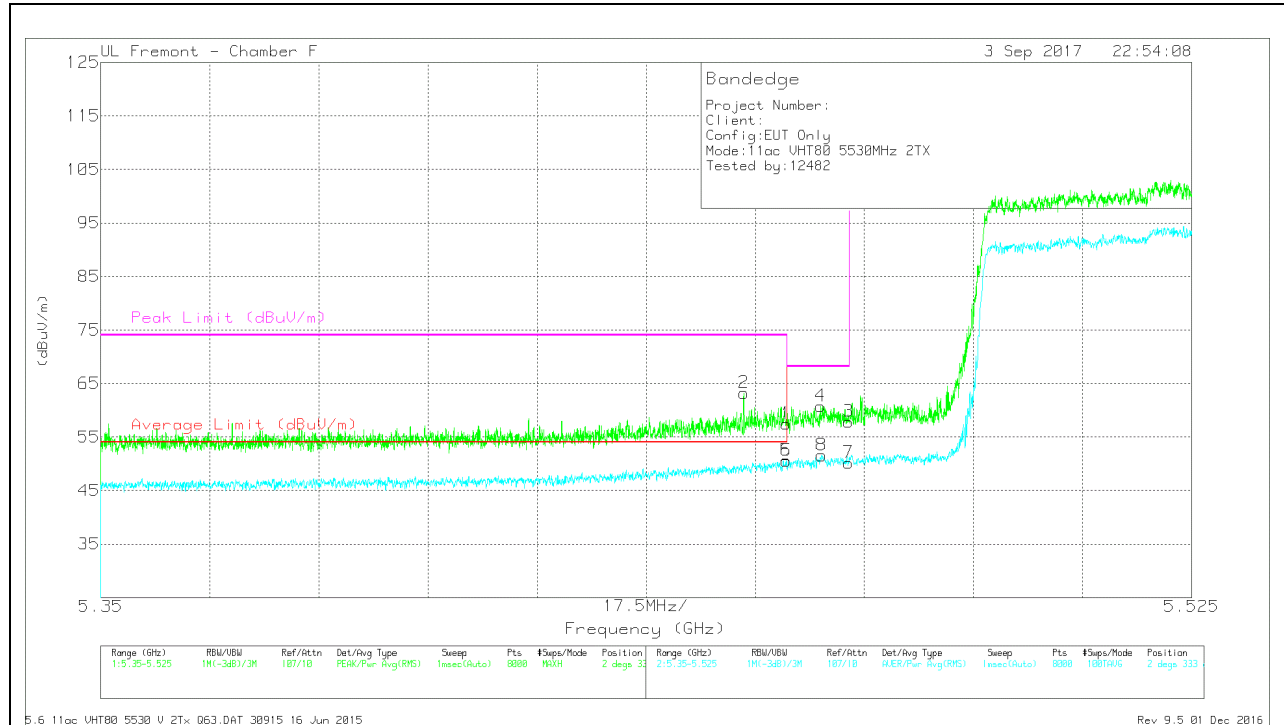


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 5.46	41.36	Pk	34.8	-18.7	0	57.46	-	-	74	-16.54	2	333	V
2	* 5.453	47.14	Pk	34.8	-18.7	0	63.24	-	-	74	-10.76	2	333	V
3	5.47	41.77	Pk	34.8	-18.7	0	57.87	-	-	68.2	-10.33	2	333	V
4	5.465	44.68	Pk	34.8	-18.7	0	60.78	-	-	68.2	-7.42	2	333	V
5	* 5.46	34.29	RMS	34.8	-18.7	.19	50.58	54	-3.42	-	-	2	333	V
6	* 5.46	34.31	RMS	34.8	-18.7	.19	50.6	54	-3.4	-	-	2	333	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


HORIZONTAL RESULT

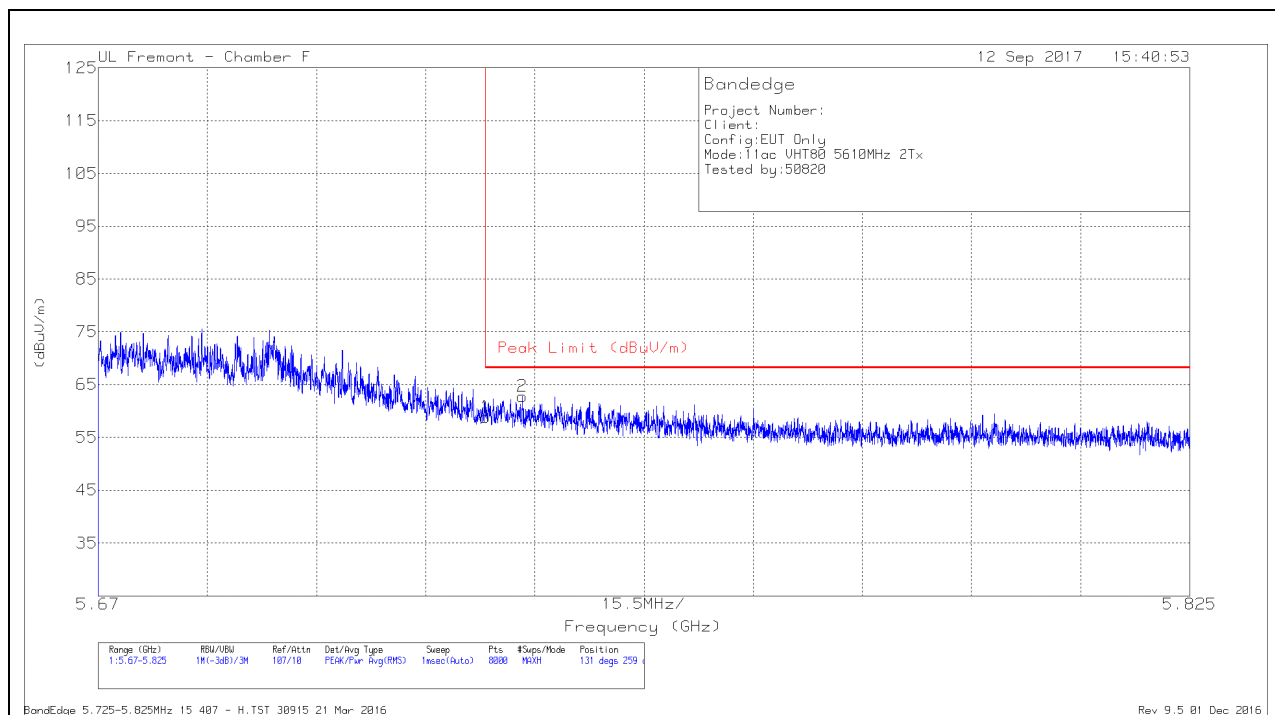

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Fltr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.79	Pk	35	-18	58.79	68.2	-9.41	131	259	H
2	5.73	45.72	Pk	35	-18	62.72	68.2	-5.48	131	259	H

Pk - Peak detector

VERTICAL RESULT


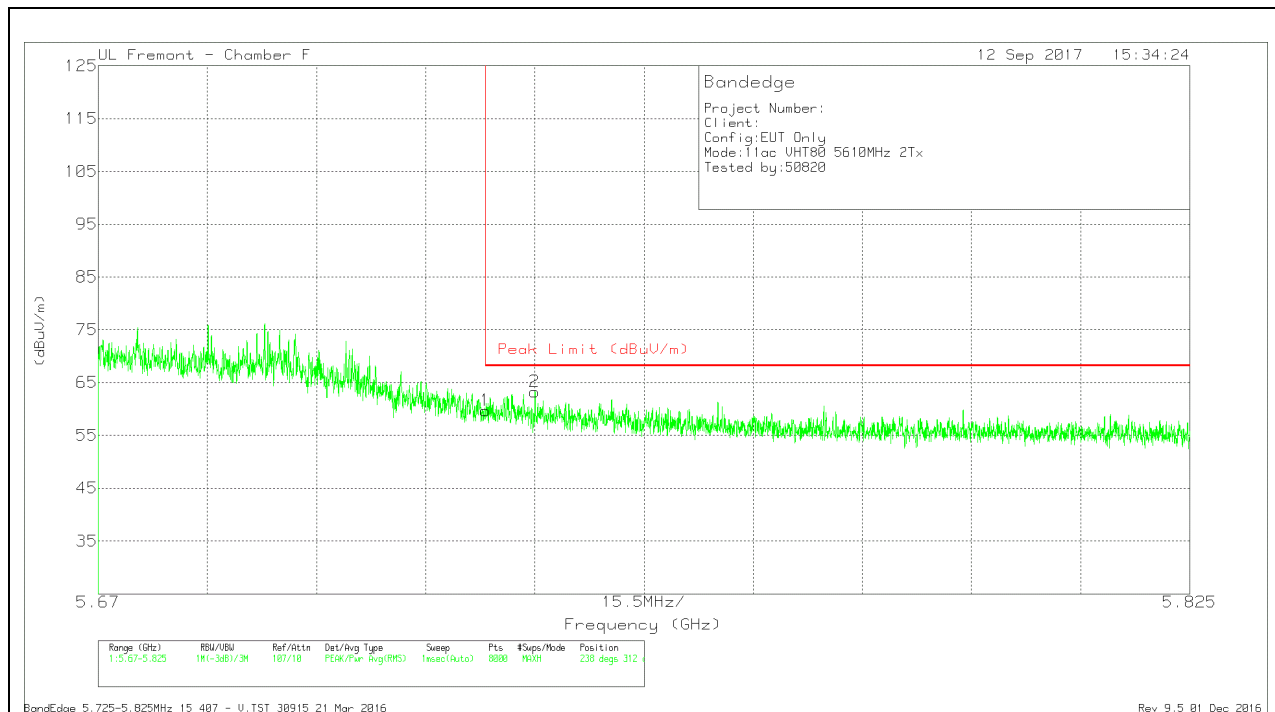


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.66	Pk	35	-18	59.66	68.2	-8.54	238	312	V
2	5.732	46.29	Pk	35	-18	63.29	68.2	-4.91	238	312	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

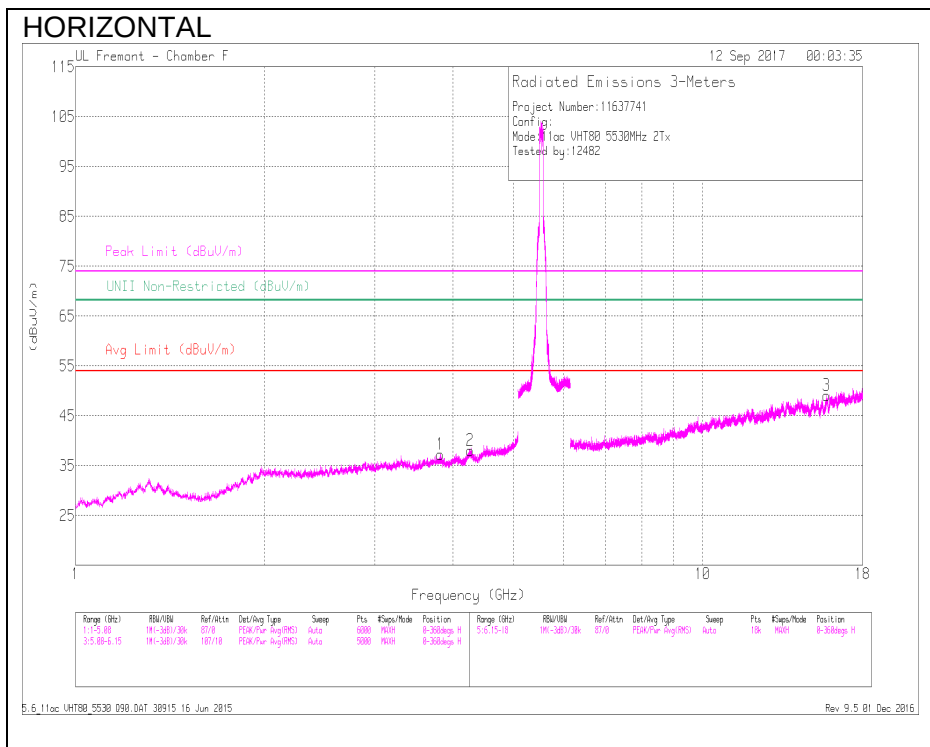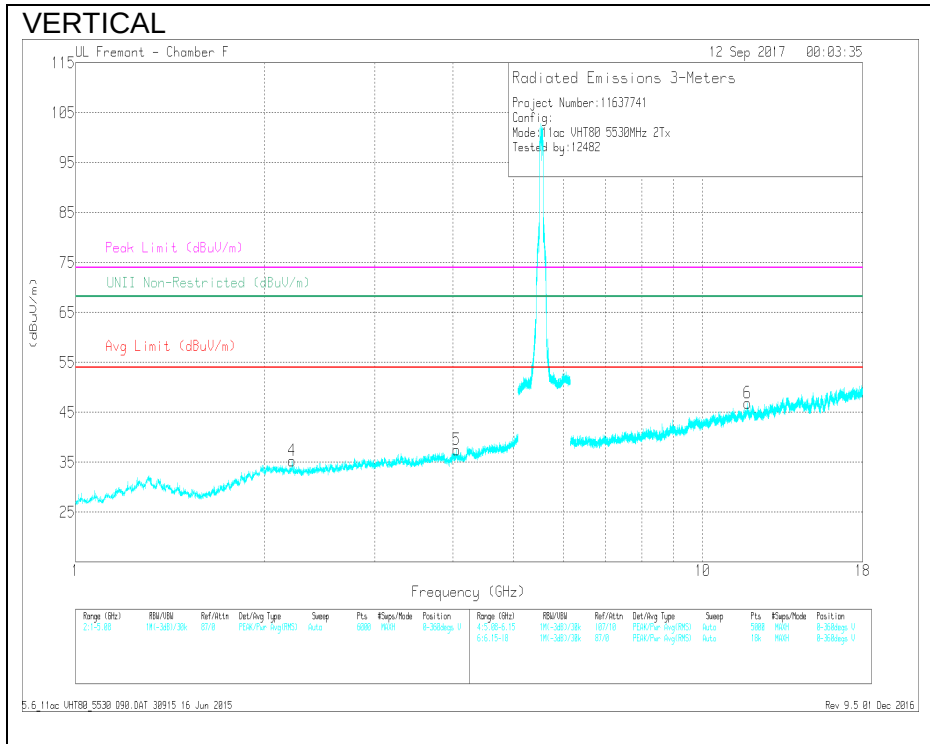

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.814	39.14	PK-U	33.3	-28.9	0	43.54	-	-	74	-30.46	233	178	H
	* 3.814	28.02	ADR	33.3	-28.9	.19	32.61	54	-21.39	-	-	233	178	H
2	* 4.263	38	PK-U	33.6	-26.8	0	44.8	-	-	74	-29.2	73	311	H
	* 4.263	26.67	ADR	33.6	-26.8	.19	33.66	54	-20.34	-	-	73	311	H
4	* 2.217	40.44	PK-U	31.9	-30.5	0	41.84	-	-	74	-32.16	194	266	V
	* 2.214	28.54	ADR	32	-30.5	.19	30.23	54	-23.77	-	-	194	266	V
5	* 4.057	39.41	PK-U	33.4	-28.4	0	44.41	-	-	74	-29.59	44	170	V
	* 4.057	27.64	ADR	33.4	-28.4	.19	32.83	54	-21.17	-	-	44	170	V
3	* 15.77	36.41	PK-U	41.8	-22.4	0	55.81	-	-	74	-18.19	293	262	H
	* 15.772	25.16	ADR	41.9	-22.5	.19	44.75	54	-9.25	-	-	293	262	H
6	* 11.794	35.22	PK-U	39	-21.4	0	52.82	-	-	74	-21.18	314	133	V
	* 11.795	24.32	ADR	39	-21.4	.19	42.11	54	-11.89	-	-	314	133	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

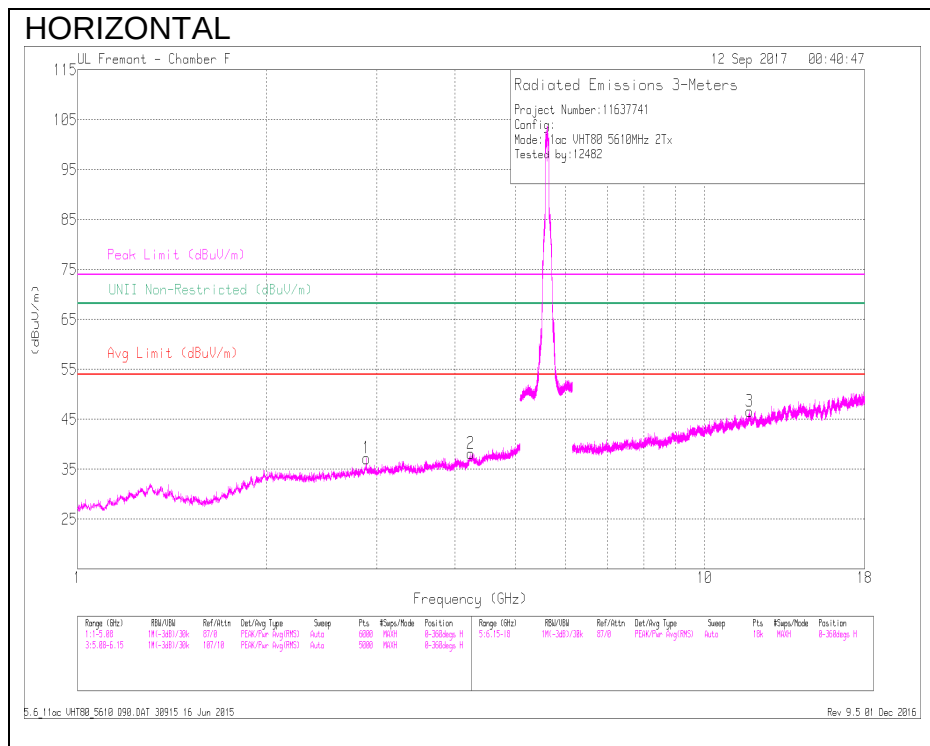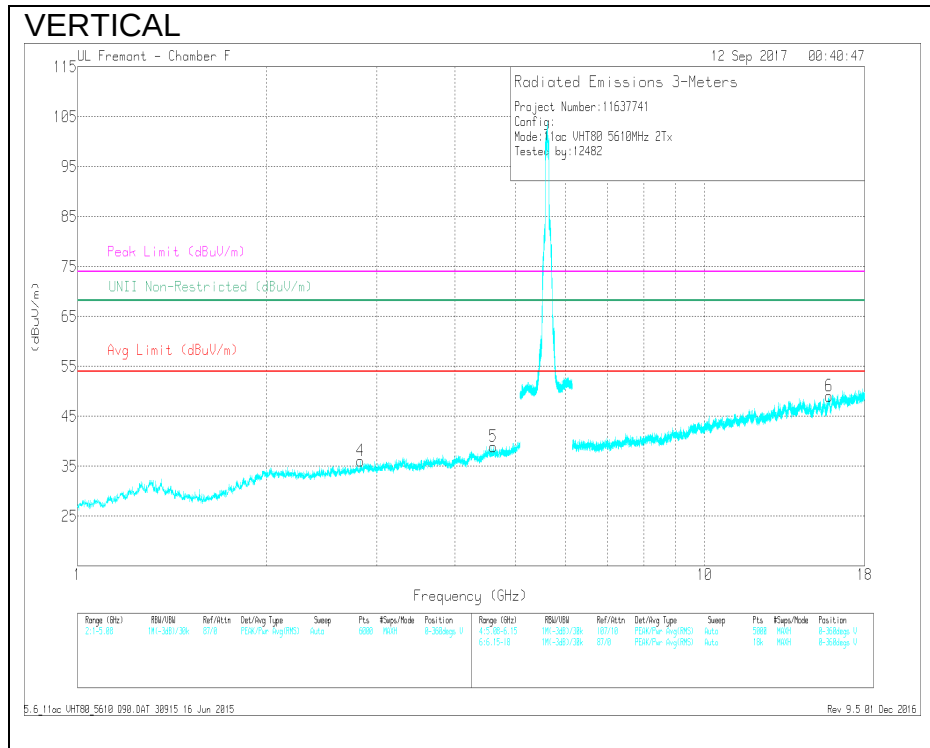

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/C bl/Filtr/ Pad (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV /m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarit y
1	* 2.888	39.64	PK-U	32.8	-29.3	0	43.14	-	-	74	-30.86	38	202	H
	* 2.889	27.95	ADR	32.8	-29.3	.19	31.64	54	-22.36	-	-	38	202	H
2	* 4.238	37.68	PK-U	33.6	-26.9	0	44.38	-	-	74	-29.62	217	265	H
	* 4.238	26.55	ADR	33.6	-26.9	.19	33.44	54	-20.56	-	-	217	265	H
4	* 2.829	39.42	PK-U	32.8	-29.9	0	42.32	-	-	74	-31.68	192	326	V
	* 2.83	28.03	ADR	32.8	-29.9	.19	31.12	54	-22.88	-	-	192	326	V
5	* 4.601	39.03	PK-U	34.1	-27.7	0	45.43	-	-	74	-28.57	330	187	V
	* 4.602	27.72	ADR	34.1	-27.7	.19	34.31	54	-19.69	-	-	330	187	V
3	* 11.798	35.34	PK-U	39	-21.4	0	52.94	-	-	74	-21.06	230	144	H
	* 11.798	24.22	ADR	39	-21.4	.19	42.01	54	-11.99	-	-	230	144	H
6	* 15.789	36.78	PK-U	42.1	-22.5	0	56.38	-	-	74	-17.62	51	195	V
	* 15.788	25.43	ADR	42.1	-22.5	.19	45.22	54	-8.78	-	-	51	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

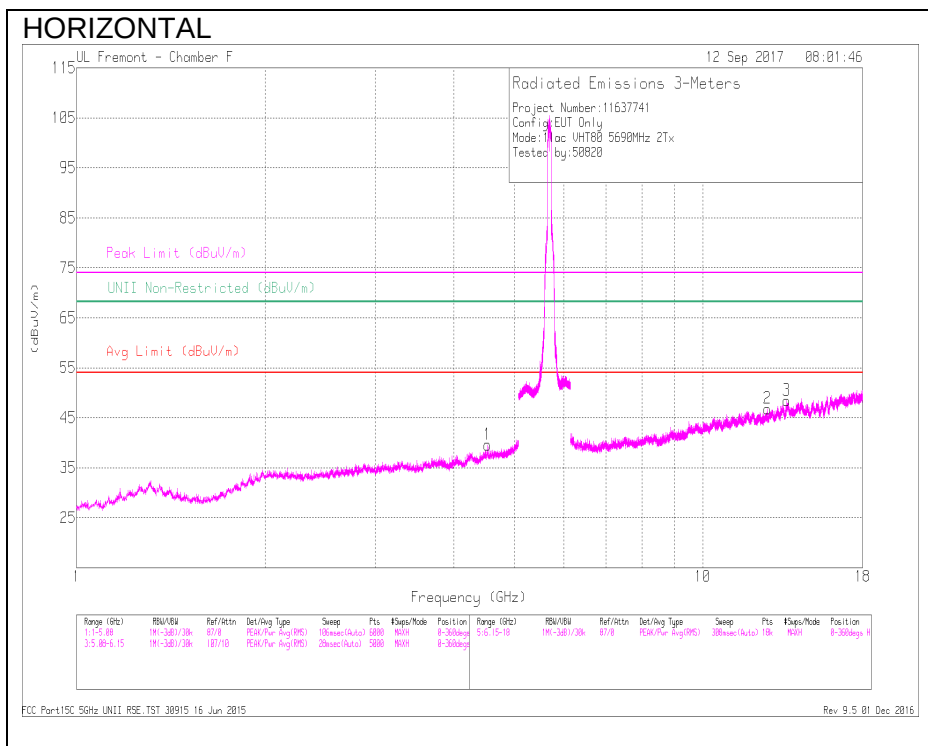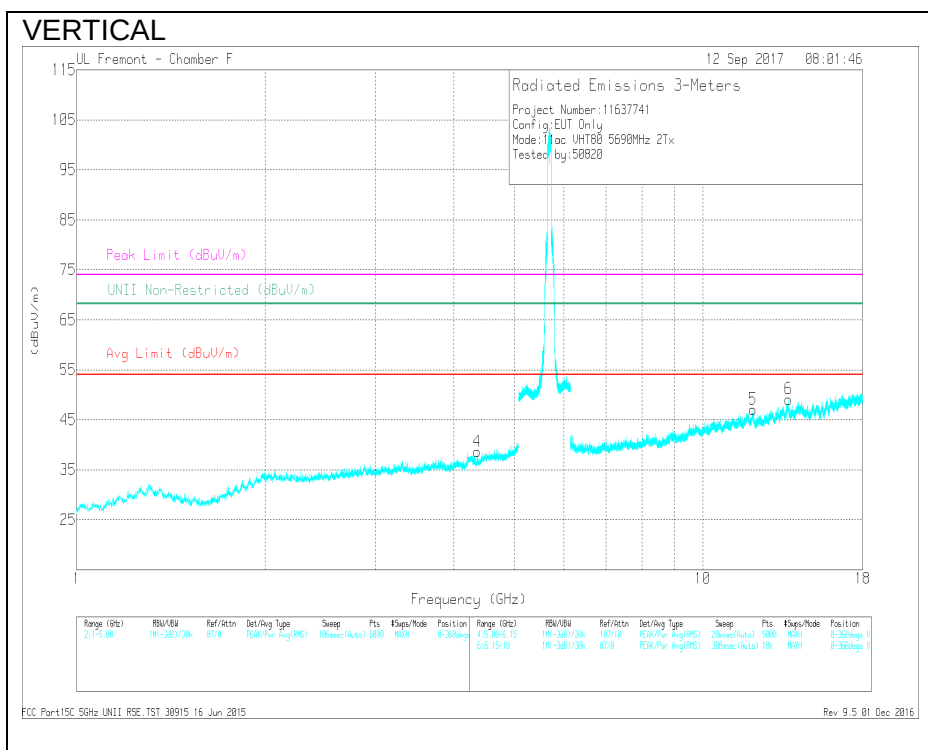

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.534	39.19	PK-U	34.1	-27.7	0	45.59	-	-	74	-28.41	-	-	155	220	H
	* 4.535	27.84	ADR	34.1	-27.8	.19	34.33	54	-19.67	-	-	-	-	155	220	H
4	* 4.363	39.21	PK-U	33.8	-28.9	0	44.11	-	-	74	-29.89	-	-	300	123	V
	* 4.362	28.11	ADR	33.8	-28.9	.19	33.20	54	-20.80	-	-	-	-	300	123	V
2	* 12.683	36.17	PK-U	38.9	-22.3	0	52.77	-	-	74	-21.23	-	-	211	302	H
	* 12.684	25.1	ADR	38.9	-22.3	.19	41.89	54	-12.11	-	-	-	-	211	302	H
3	13.615	37.31	PK-U	39.4	-22	0	54.71	-	-	-	-	68.2	-13.49	350	103	H
5	* 12.021	36.14	PK-U	39.2	-21.6	0	53.74	-	-	74	-20.26	-	-	264	388	V
	* 12.024	24.84	ADR	39.1	-21.6	.19	42.53	54	-11.47	-	-	-	-	264	388	V
6	13.705	37.42	PK-U	39.2	-21.6	0	55.02	-	-	-	-	68.2	-13.18	193	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

11.1.10. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX Antenna A

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

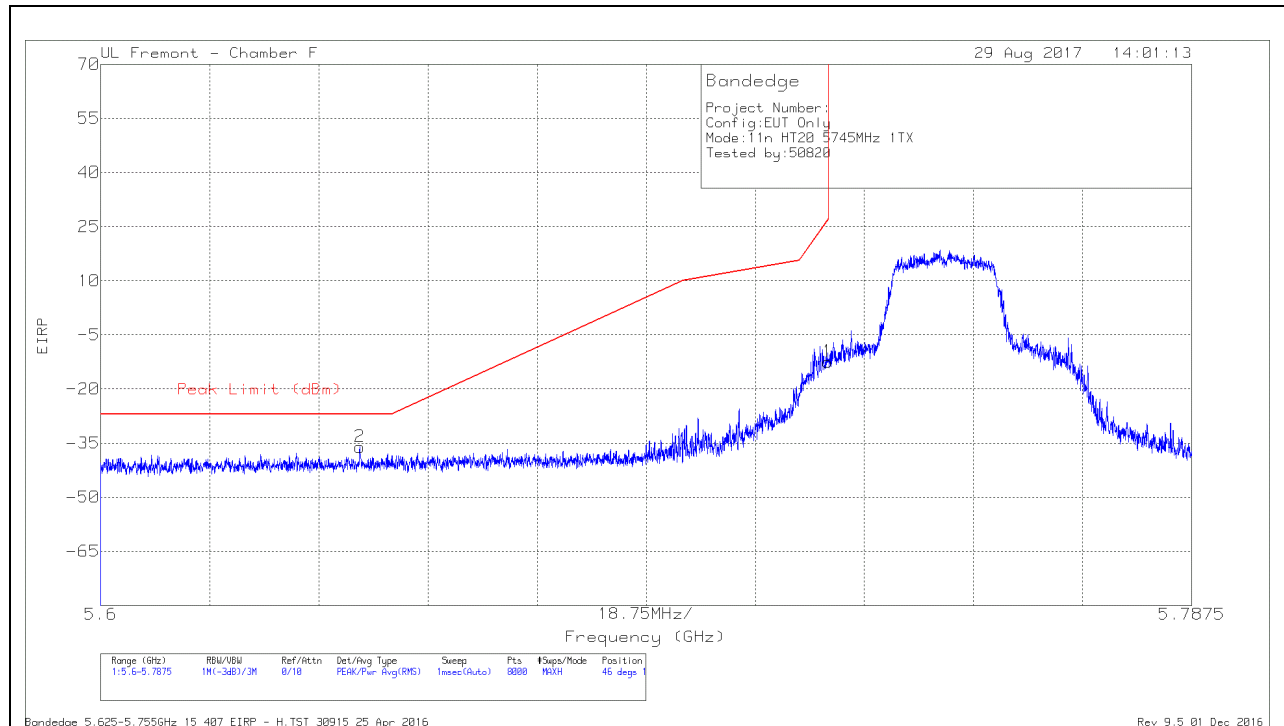

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AFT119 (dB/m)	Amp/Cbl /Fltr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-41.26	Pk	35	-18	11.8	-12.46	26.96	-39.42	46	189	H
2	5.645	-64.56	Pk	34.9	-18.2	11.8	-36.06	-27	-9.06	46	189	H

Pk - Peak detector


VERTICAL RESULT

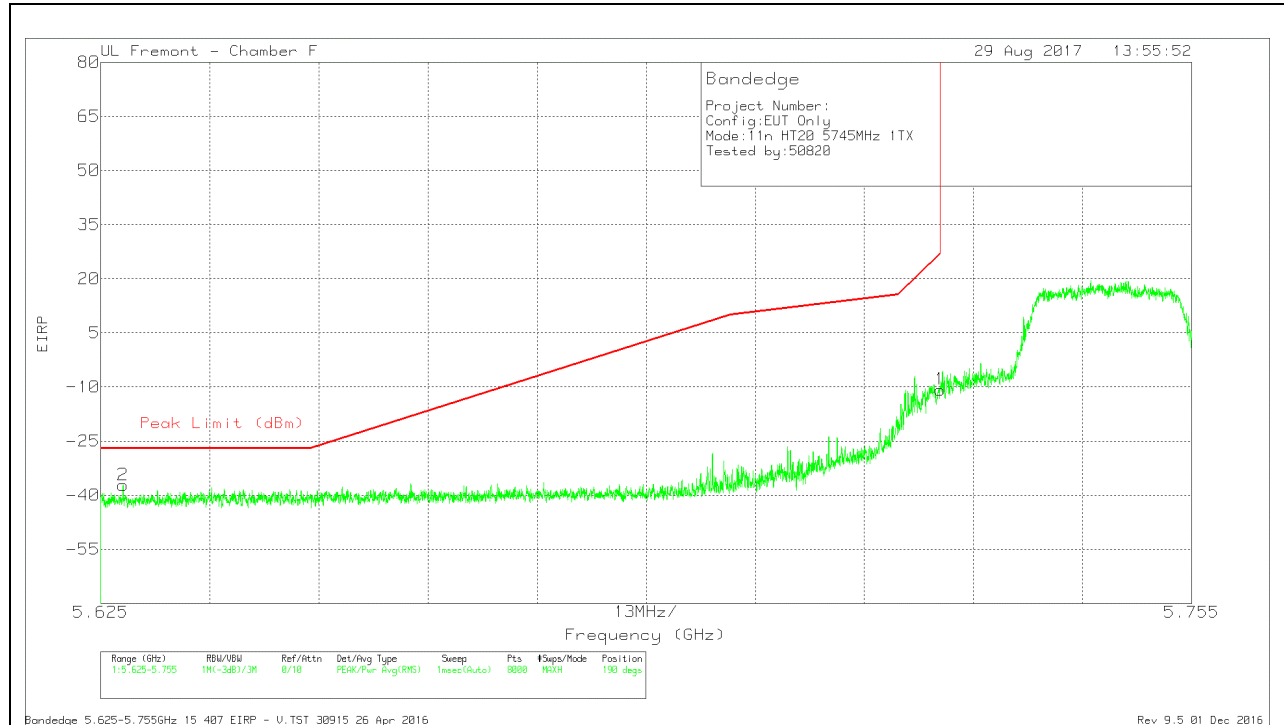

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-39.54	Pk	35	-18	11.8	-10.74	27	-37.74	190	303	V
2	5.628	-65.62	Pk	34.9	-18.3	11.8	-37.22	-27	-10.22	190	303	V

Pk - Peak detector


HORIZONTAL RESULT

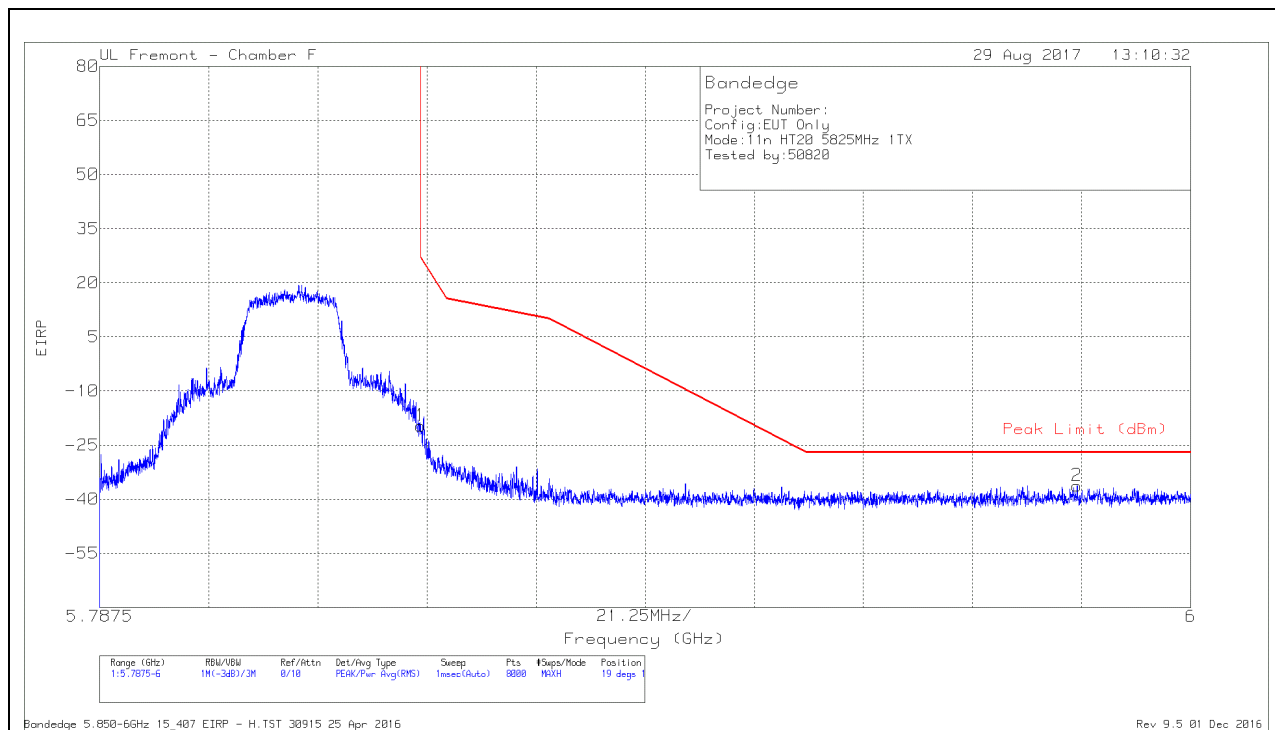

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.44	Pk	35.1	-18.1	11.8	-19.64	26.98	-46.62	19	150	H
2	5.978	-65.18	Pk	35.2	-18.1	11.8	-36.28	-27	-9.28	19	150	H

Pk - Peak detector

VERTICAL RESULT

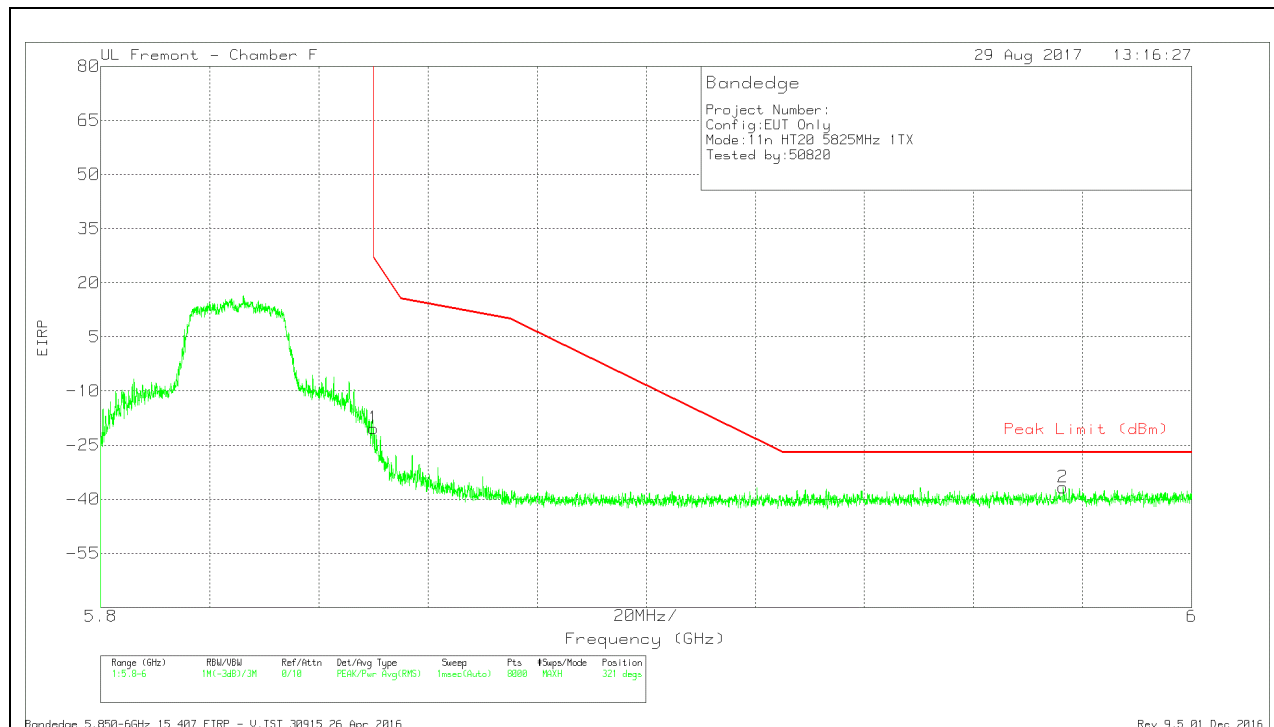


Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AFT119 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-49.17	Pk	35.1	-18.1	11.8	-20.37	26.99	-47.36	321	159	V
2	5.976	-65.5	Pk	35.2	-18.2	11.8	-36.7	-27	-9.7	321	159	V

Pk - Peak detector

1TX Antenna B

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

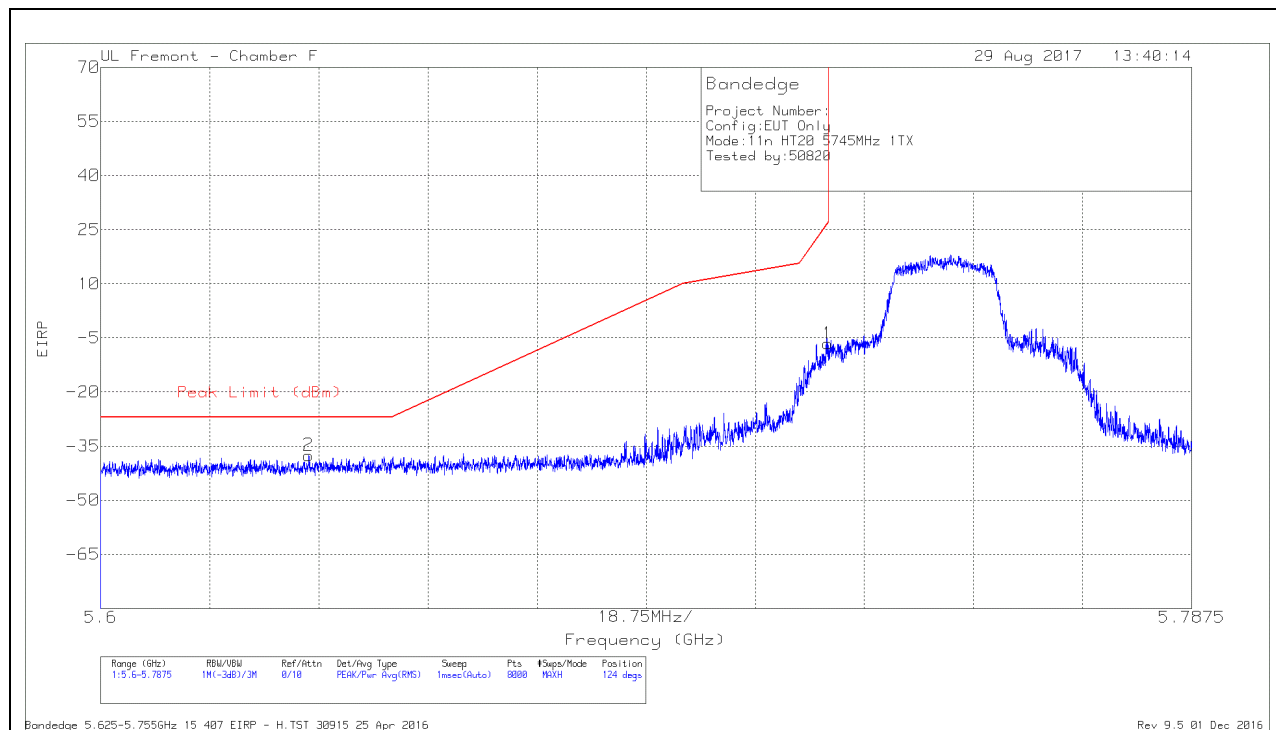

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AFT119 (dB/m)	Amp/Cbl /Fitr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-35.37	Pk	35	-18	11.8	-6.57	26.96	-33.53	124	340	H
2	5.636	-66.06	Pk	34.9	-18.2	11.8	-37.56	-27	-10.56	124	340	H

Pk - Peak detector


VERTICAL RESULT

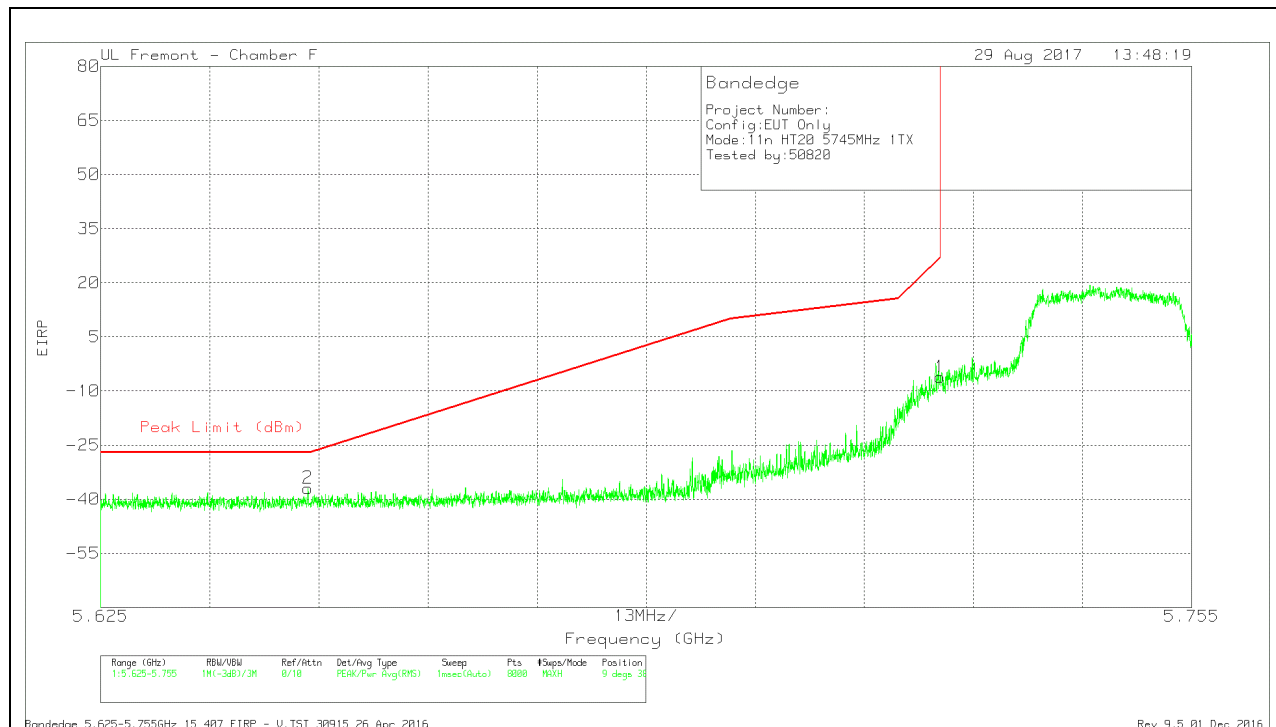

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cb l/Filtr/P ad (dB)	Convers ion Factor (dB)	Correct ed Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-34.97	Pk	35	-18	11.8	-6.17	27	-33.17	9	382	V
2	5.65	-65.57	Pk	34.9	-18.1	11.8	-36.97	-27	-9.97	9	382	V

Pk - Peak detector


HORIZONTAL RESULT

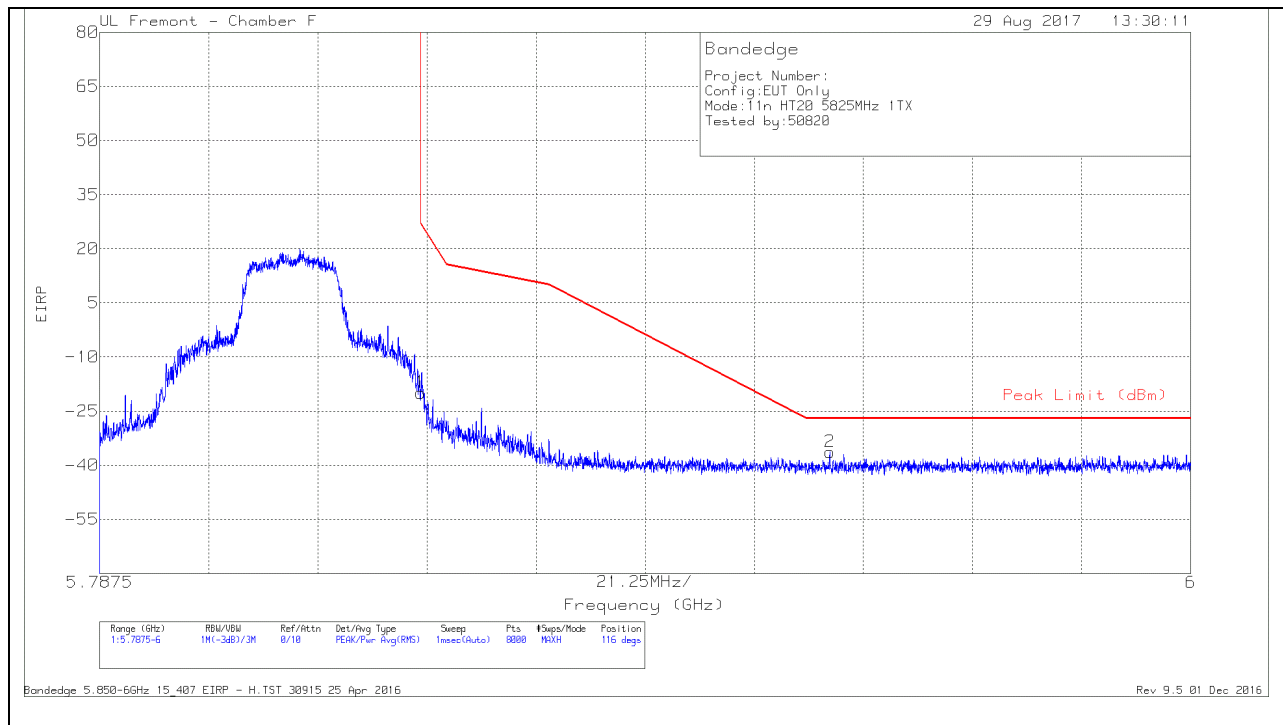

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.71	Pk	35.1	-18.1	11.8	-19.91	26.98	-46.89	116	280	H
2	5.93	-65.04	Pk	35.2	-18.3	11.8	-36.34	-27	-9.34	116	280	H


Pk - Peak detector

VERTICAL RESULT

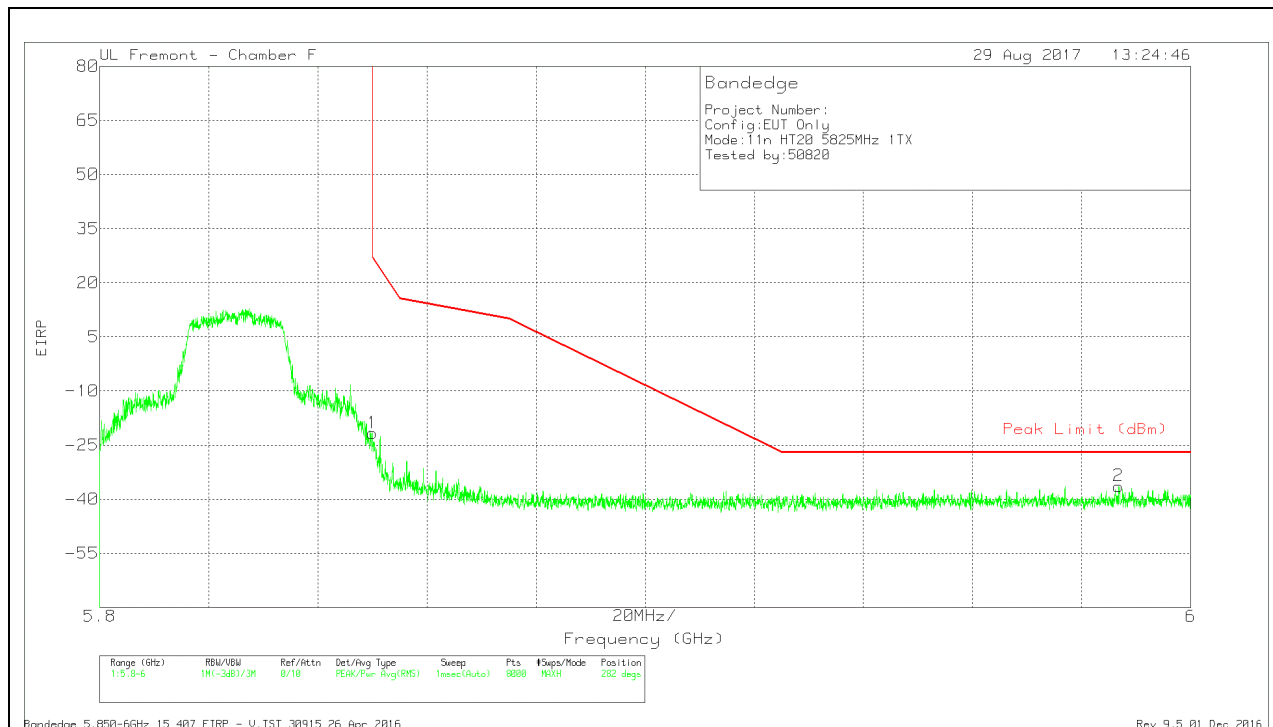

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-50.48	Pk	35.1	-18.1	11.8	-21.68	26.99	-48.67	282	303	V
2	5.987	-65.39	Pk	35.2	-18	11.8	-36.39	-27	-9.39	282	303	V


Pk - Peak detector

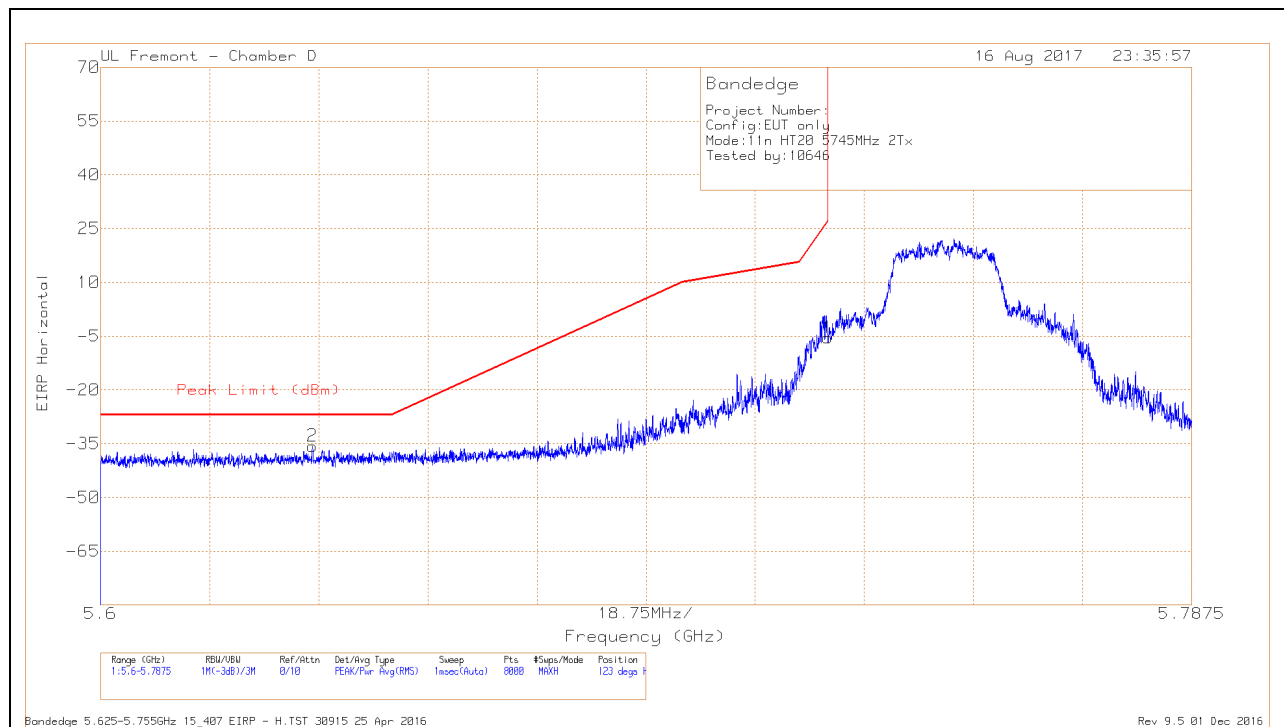2TX Antenna A + Antenna B CDD MODE**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl /Ftr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.636	-64.69	Pk	34.7	-17.5	11.8	-35.69	-27	-8.69	123	254	H
1	5.725	-34.57	Pk	34.8	-17.5	11.8	-5.47	26.96	-32.43	123	254	H

Pk - Peak detector


VERTICAL RESULT

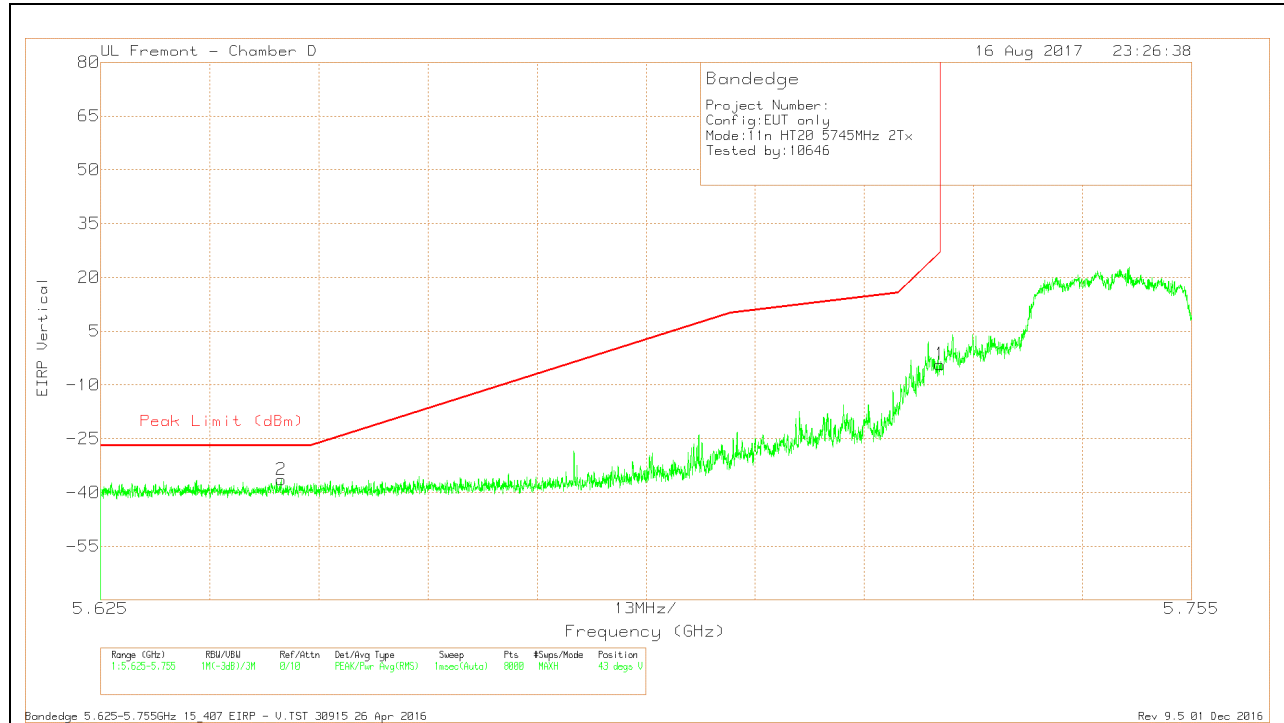

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/P ad (dB)	Convers ion Factor (dB)	Correct ed Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647	-65.44	Pk	34.7	-17.5	11.8	-36.44	-27	-9.44	43	286	V
1	5.725	-33.4	Pk	34.8	-17.5	11.8	-4.3	27	-31.3	43	286	V

Pk - Peak detector


HORIZONTAL RESULT

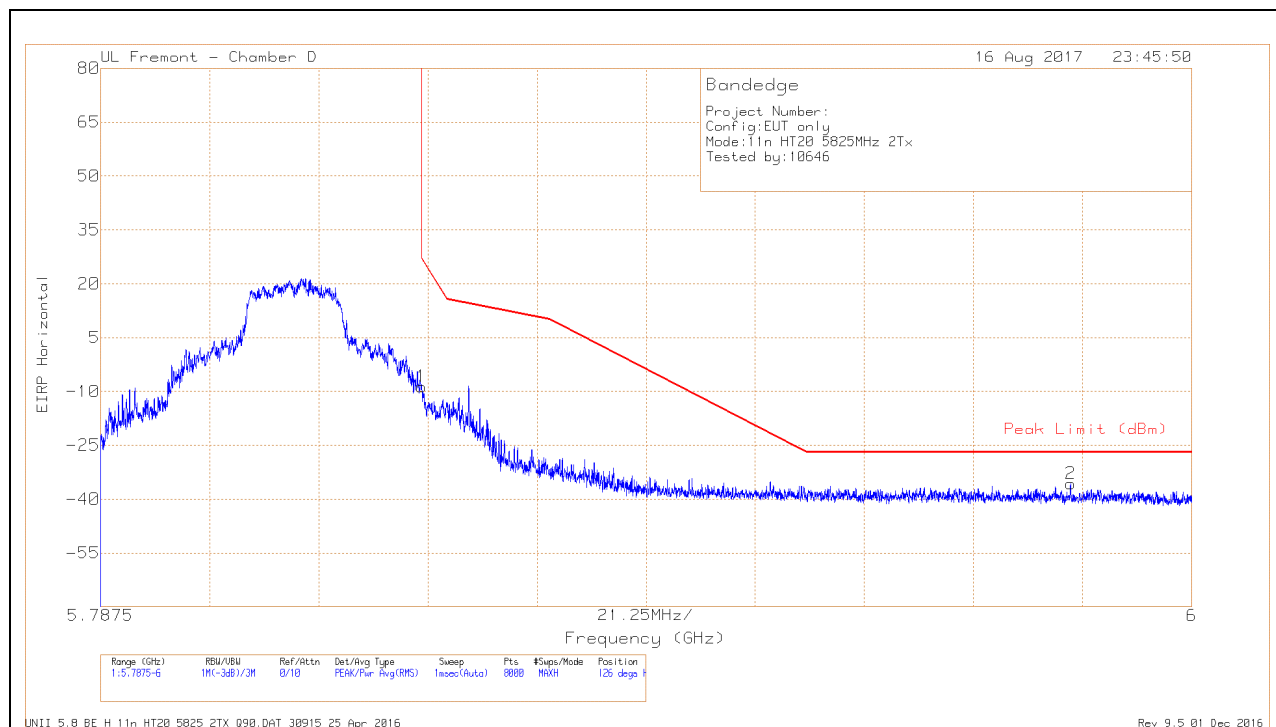

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-37.78	Pk	34.8	-17.5	11.8	-8.68	26.98	-35.66	126	256	H
2	5.976	-65.29	Pk	35.2	-17.4	11.8	-35.69	-27	-8.69	126	256	H

Pk - Peak detector

VERTICAL RESULT


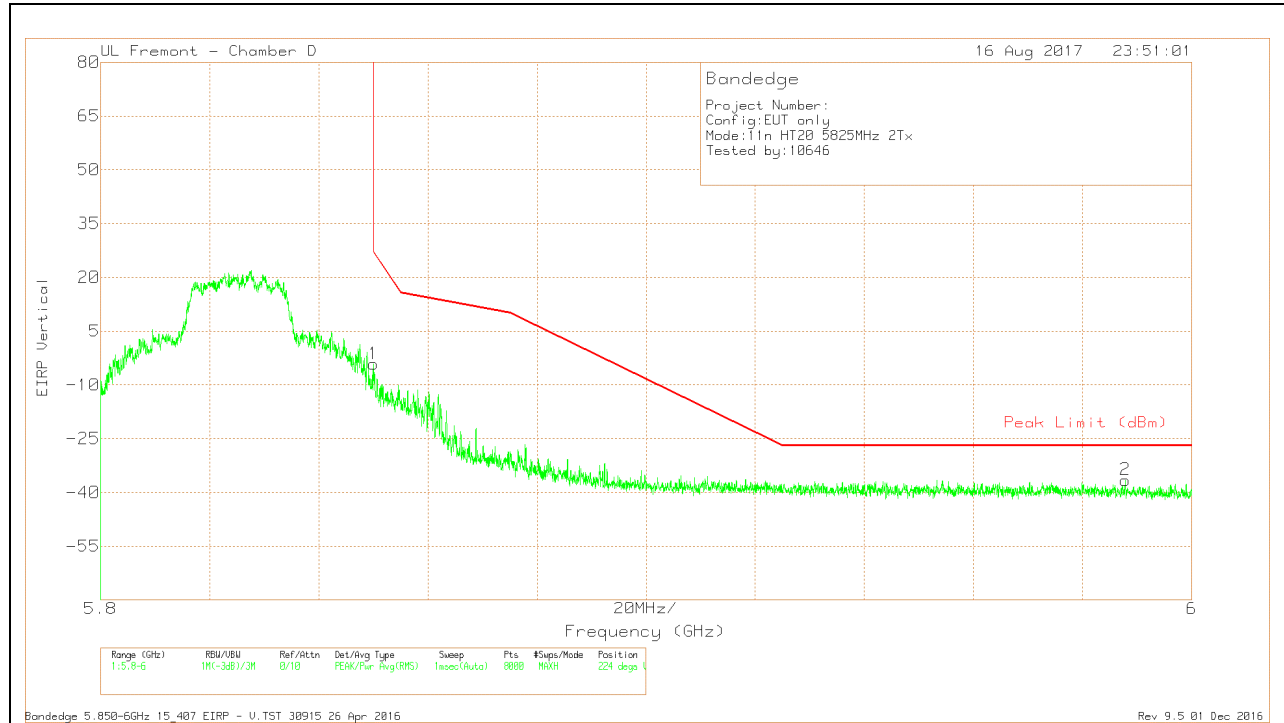


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-33.25	Pk	34.8	-17.5	11.8	-4.15	26.99	-31.14	224	320	V
2	5.988	-66.11	Pk	35.2	-17.4	11.8	-36.51	-27	-9.51	224	320	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

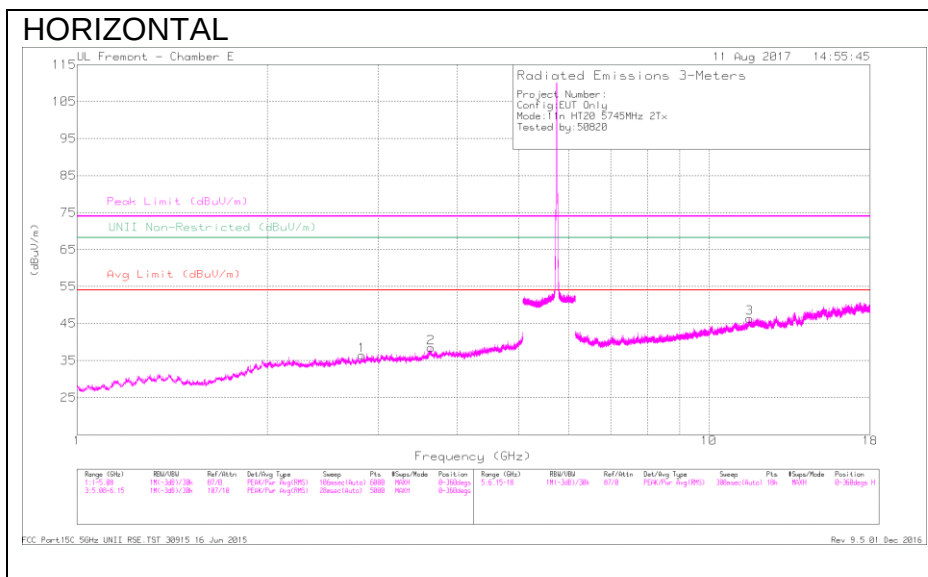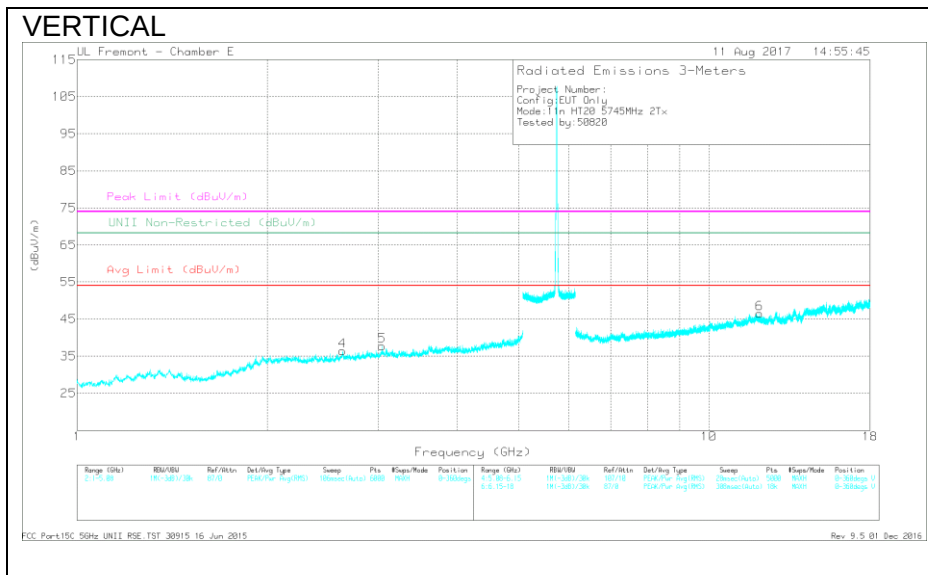

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Mete r Readi ng (dBu V)	Det	AF T346 (dB/m)	Amp/C bl/Filtr /Pad (dB)	Correc ted Readin g (dBuV/ m)	Avg Limit (dBuV/ m)	Margi n (dB)	Peak Limit (dBuV/ m)	PK Margi n (dB)	UNII Non- Restric ted (dBuV/ m)	PK Margi n (dB)	Azimu th (Degs)	Height (cm)	Polarit y
1	* 2.824	42.29	PK-U	32.7	-31.6	43.39	-	-	74	-30.61	-	-	132	268	H
	* 2.824	30.26	ADR	32.7	-31.6	31.36	54	-22.64	-	-	-	-	132	268	H
2	* 3.632	40.92	PK-U	33.4	-30.3	44.02	-	-	74	-29.98	-	-	297	309	H
	* 3.633	29.82	ADR	33.4	-30.3	32.92	54	-21.08	-	-	-	-	297	309	H
3	* 11.61	36.53	PK-U	38.8	-22.1	53.23	-	-	74	-20.77	-	-	61	159	H
	* 11.609	25.12	ADR	38.8	-22.1	41.82	54	-12.18	-	-	-	-	61	159	H
4	2.63	41.69	PK-U	32.2	-30.4	43.49	-	-	-	-	68.2	-24.71	153	244	V
5	3.039	41.34	PK-U	33	-30.4	43.94	-	-	-	-	68.2	-24.26	340	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

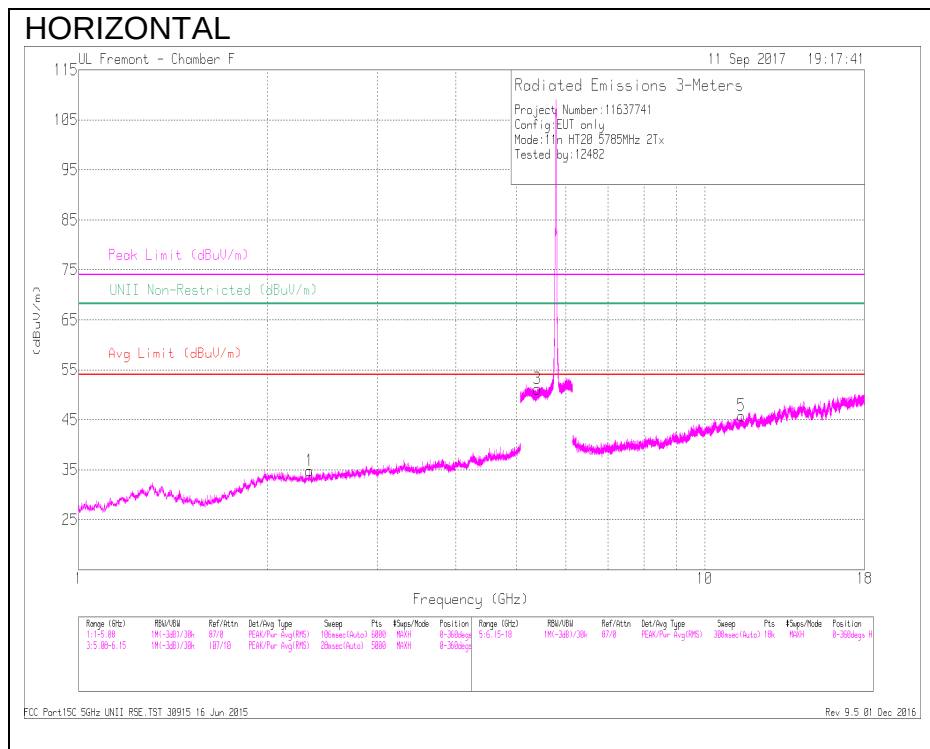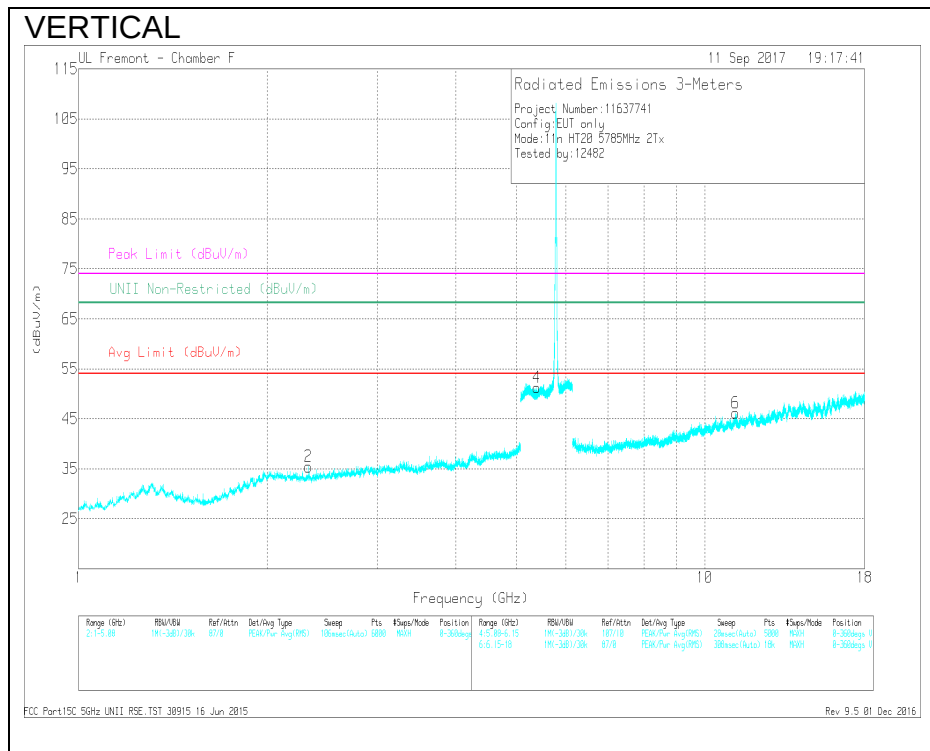

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 2.339	40.22	PK-U	31.7	-30.4	41.52	-	-	74	-32.48	-	-	310	155	H
	* 2.336	28.43	ADR	31.7	-30.4	29.73	54	-24.27	-	-	-	-	310	155	H
2	* 2.329	41	PK-U	31.7	-30.3	42.4	-	-	74	-31.6	-	-	76	297	V
	* 2.327	28.51	ADR	31.7	-30.3	29.91	54	-24.09	-	-	-	-	76	297	V
3	* 5.4	41.77	PK-U	34.7	-18.7	57.77	-	-	74	-16.23	-	-	182	127	H
	* 5.399	30.62	ADR	34.7	-18.7	46.62	54	-7.38	-	-	-	-	182	127	H
4	* 5.391	41.29	PK-U	34.7	-18.6	57.39	-	-	74	-16.61	-	-	222	327	V
	* 5.391	30.32	ADR	34.7	-18.6	46.42	54	-7.58	-	-	-	-	222	327	V
5	* 11.441	35.69	PK-U	38.3	-21.3	52.69	-	-	74	-21.31	-	-	273	178	H
	* 11.441	24.21	ADR	38.3	-21.3	41.21	54	-12.79	-	-	-	-	273	178	H
6	* 11.197	36.16	PK-U	38.1	-21.3	52.96	-	-	74	-21.04	-	-	96	119	V
	* 11.199	24.41	ADR	38.1	-21.3	41.21	54	-12.79	-	-	-	-	96	119	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

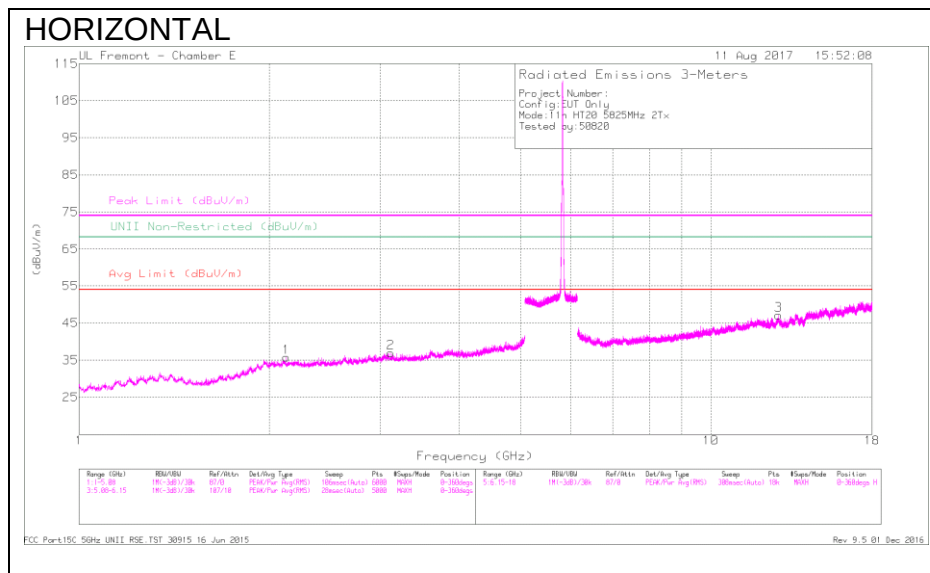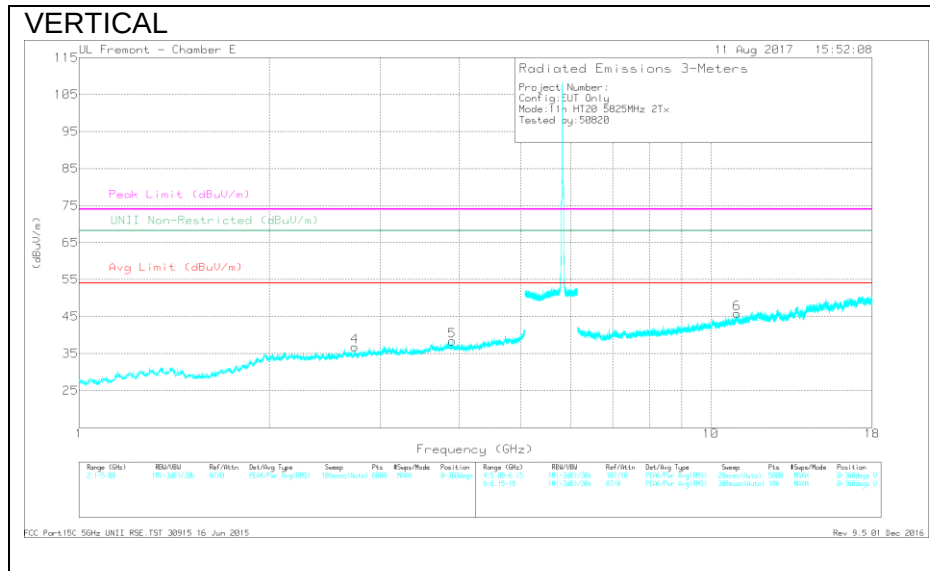

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.731	42.91	PK-U	32.5	-32	43.41	-	-	74	-30.59	-	-	231	101	V
	* 2.733	30.81	ADR	32.5	-32	31.31	54	-22.69	-	-	-	-	231	101	V
5	* 3.896	42.26	PK-U	33.7	-30	45.96	-	-	74	-28.04	-	-	186	311	V
	* 3.894	30.71	ADR	33.7	-29.9	34.51	54	-19.49	-	-	-	-	186	311	V
6	* 11.009	36.12	PK-U	38.5	-22.4	52.22	-	-	74	-21.78	-	-	133	269	V
	* 11.006	25.26	ADR	38.5	-22.4	41.36	54	-12.64	-	-	-	-	133	269	V
1	2.13	42.05	PK-U	32.1	-32.8	41.35	-	-	-	-	68.2	-26.85	319	171	H
2	3.114	40.95	PK-U	33.1	-30.6	43.45	-	-	-	-	68.2	-24.75	263	350	H
3	12.795	36.78	PK-U	39.9	-23.1	53.58	-	-	-	-	68.2	-14.62	42	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

11.1.11. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX Antenna A


BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

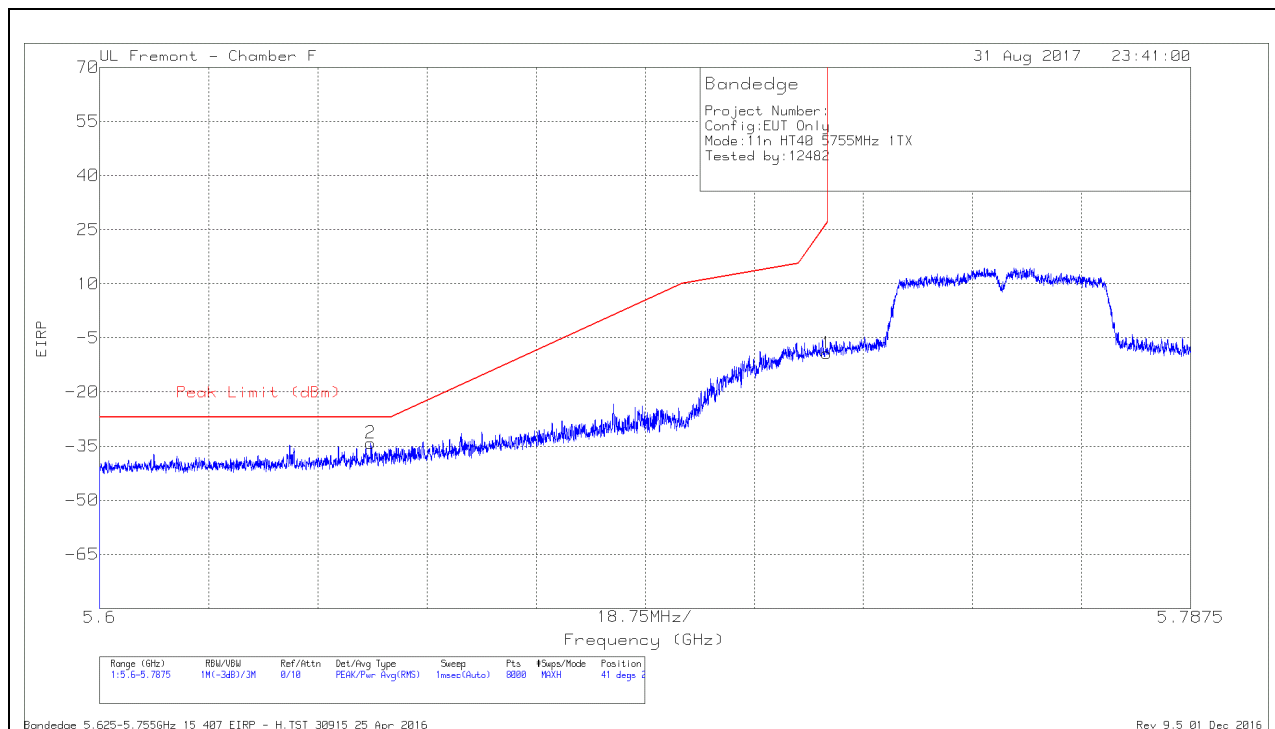

Pk - Peak detector


VERTICAL RESULT

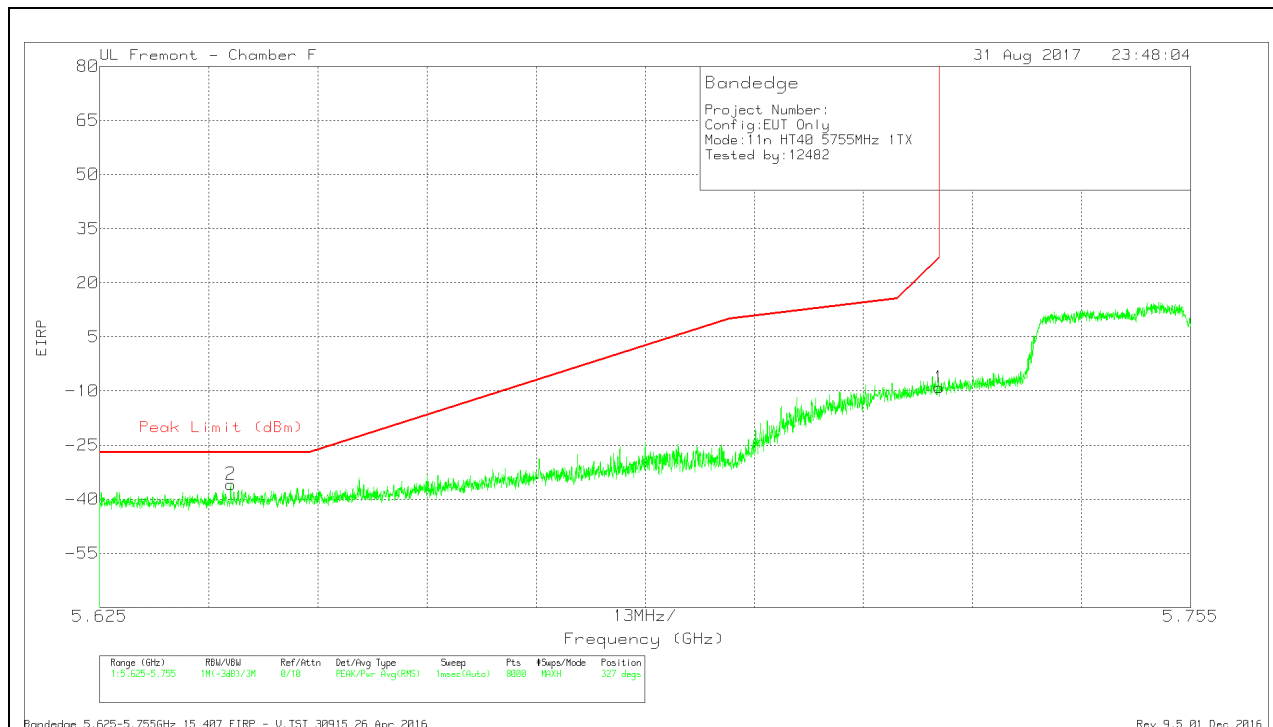

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	5.725	-37.84	Pk	35	-18	11.8	0	-9.04	27	-36.04	327	238	V
2	5.641	-64.4	Pk	34.9	-18.2	11.8	0	-35.9	-27	-8.9	327	238	V

Pk - Peak detector


HORIZONTAL RESULT

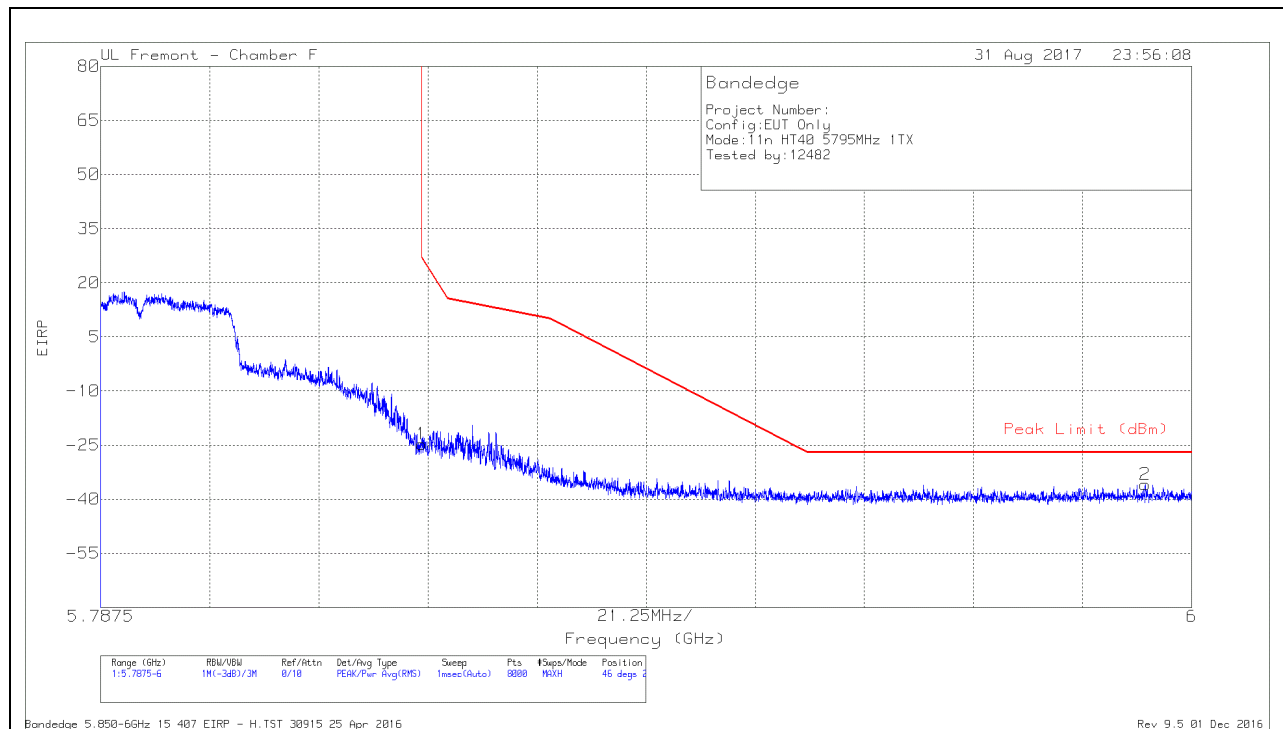

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-53.56	Pk	35.1	-18.1	11.8	0	-24.76	26.98	-51.74	46	225	H
2	5.991	-64.97	Pk	35.2	-18	11.8	0	-35.97	-27	-8.97	46	225	H

Pk - Peak detector

VERTICAL RESULT

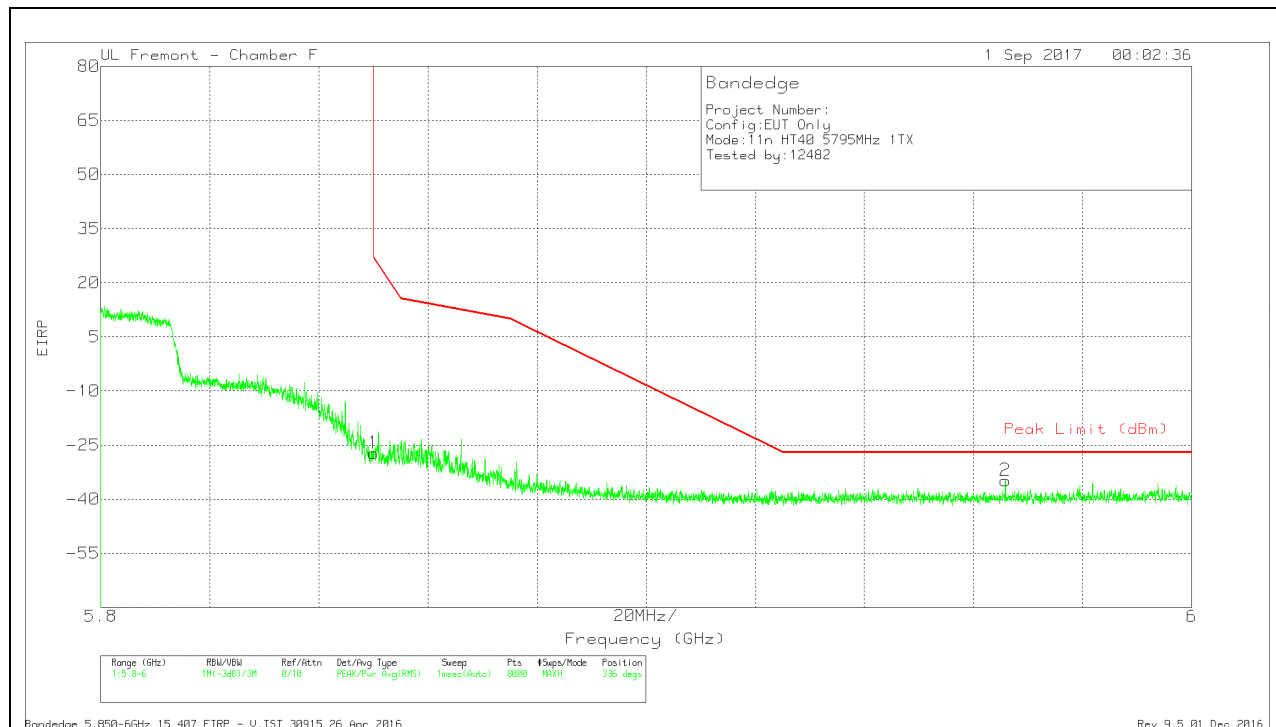


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	5.85	-56.03	Pk	35.1	-18.1	11.8	0	-27.23	26.99	-54.22	336	208	V
2	5.966	-63.64	Pk	35.2	-18.2	11.8	0	-34.84	-27	-7.84	336	208	V

Pk - Peak detector

1TX Antenna B

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

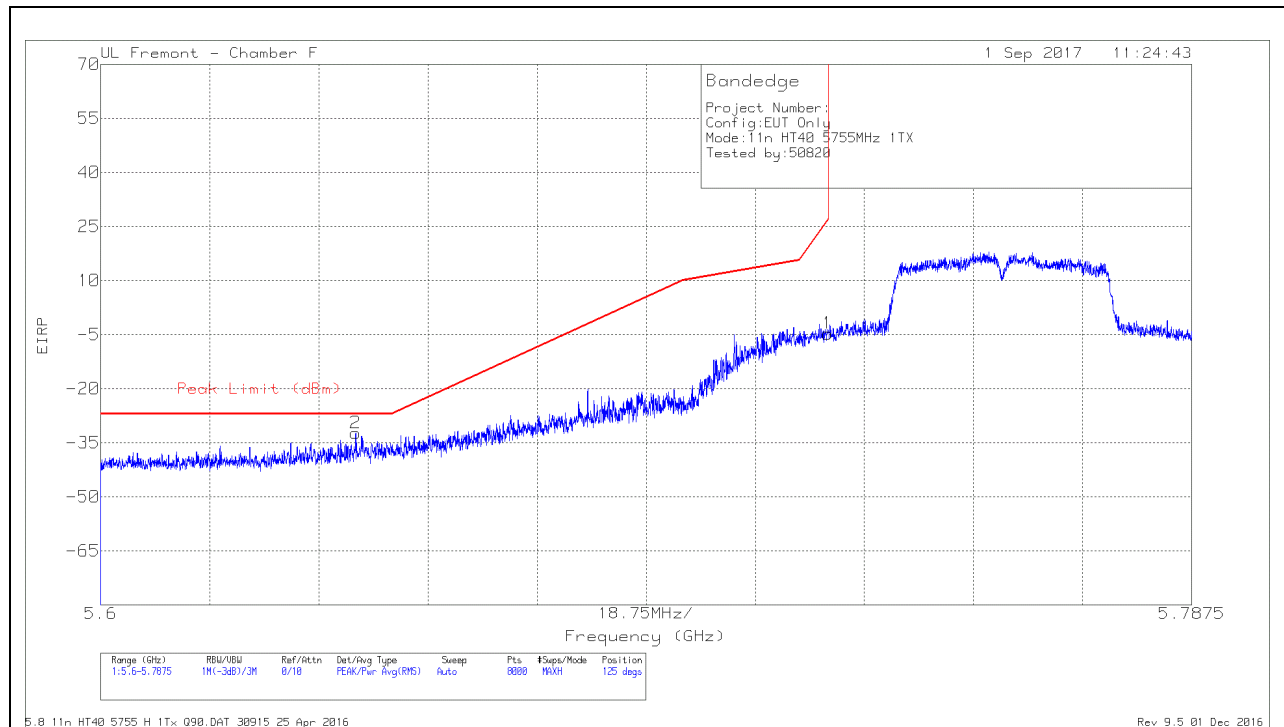

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-33.52	Pk	35	-18	11.8	0	-4.72	26.96	-31.68	125	272	H
2	5.644	-60.84	Pk	34.9	-18.2	11.8	0	-32.34	-27	-5.34	125	272	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector


VERTICAL RESULT

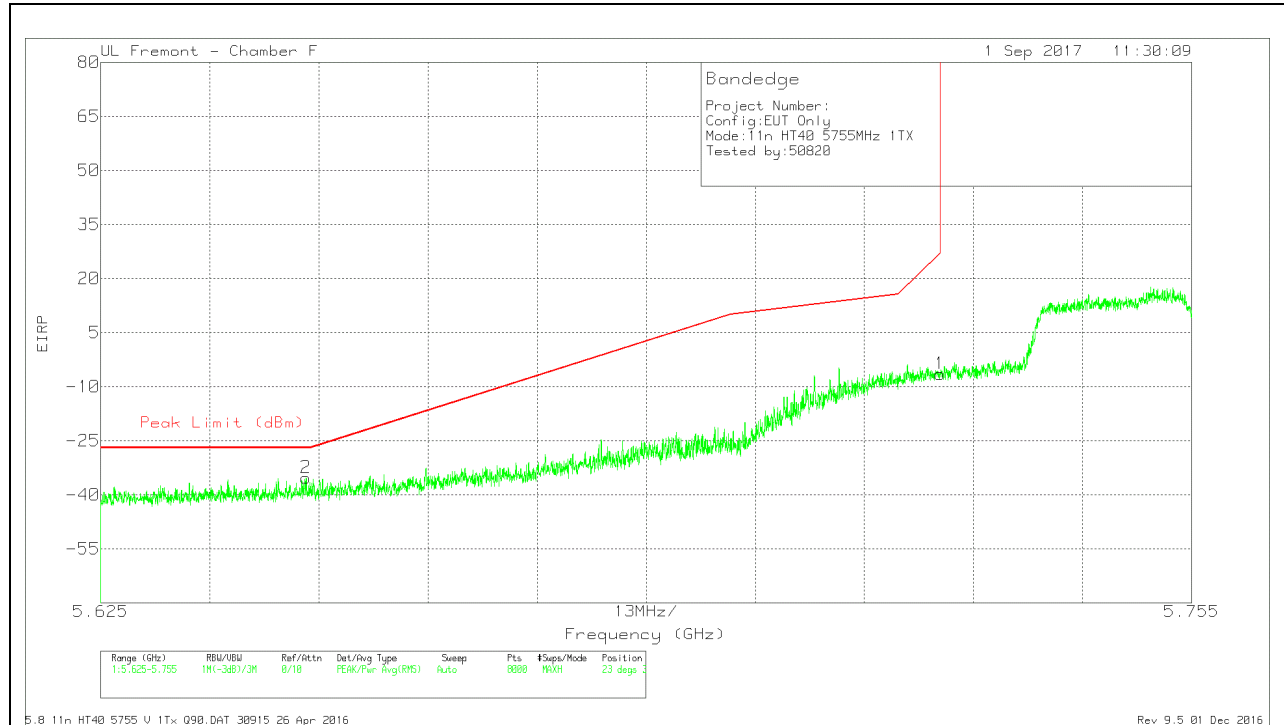

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-35.26	Pk	35	-18	11.8	0	-6.46	27	-33.46	23	359	V
2	5.649	-63.9	Pk	34.9	-18.1	11.8	0	-35.3	-27	-8.3	23	359	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

HORIZONTAL RESULT

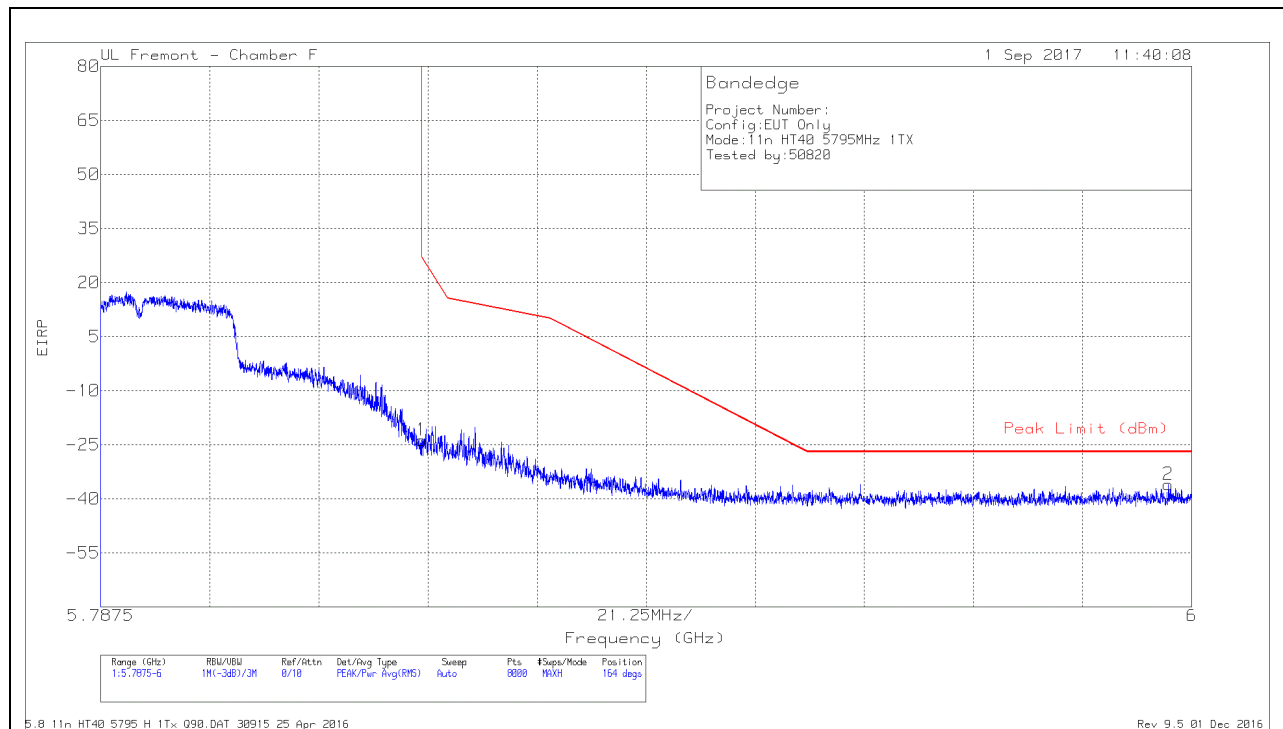


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.49	Pk	35.1	-18.1	11.8	0	-23.69	26.98	-50.67	164	262	H
2	5.995	-64.93	Pk	35.2	-18.1	11.8	0	-36.03	-27	-9.03	164	262	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

VERTICAL RESULT

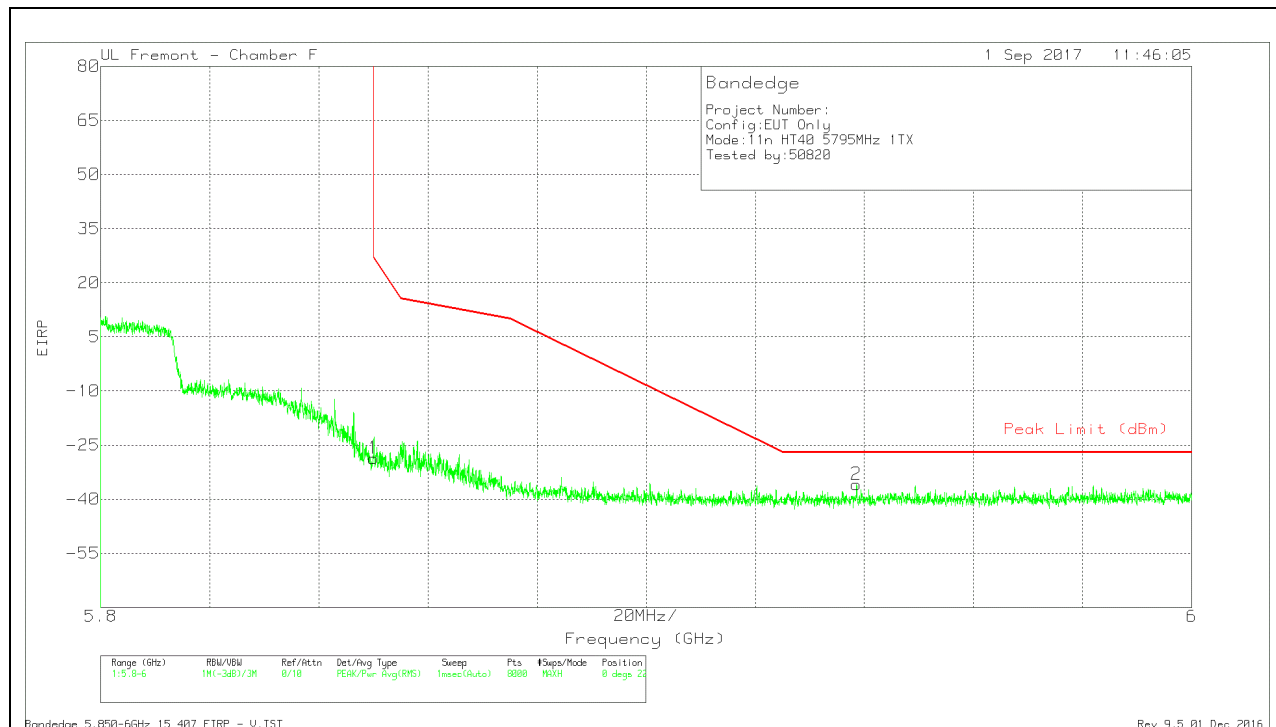

Marker	Frequen cy (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-57.45	Pk	35.1	-18.1	11.8	-28.65	26.99	-55.64	0	221	V
2	5.939	-64.62	Pk	35.2	-18.3	11.8	-35.92	-27	-8.92	0	221	V


Pk - Peak detector

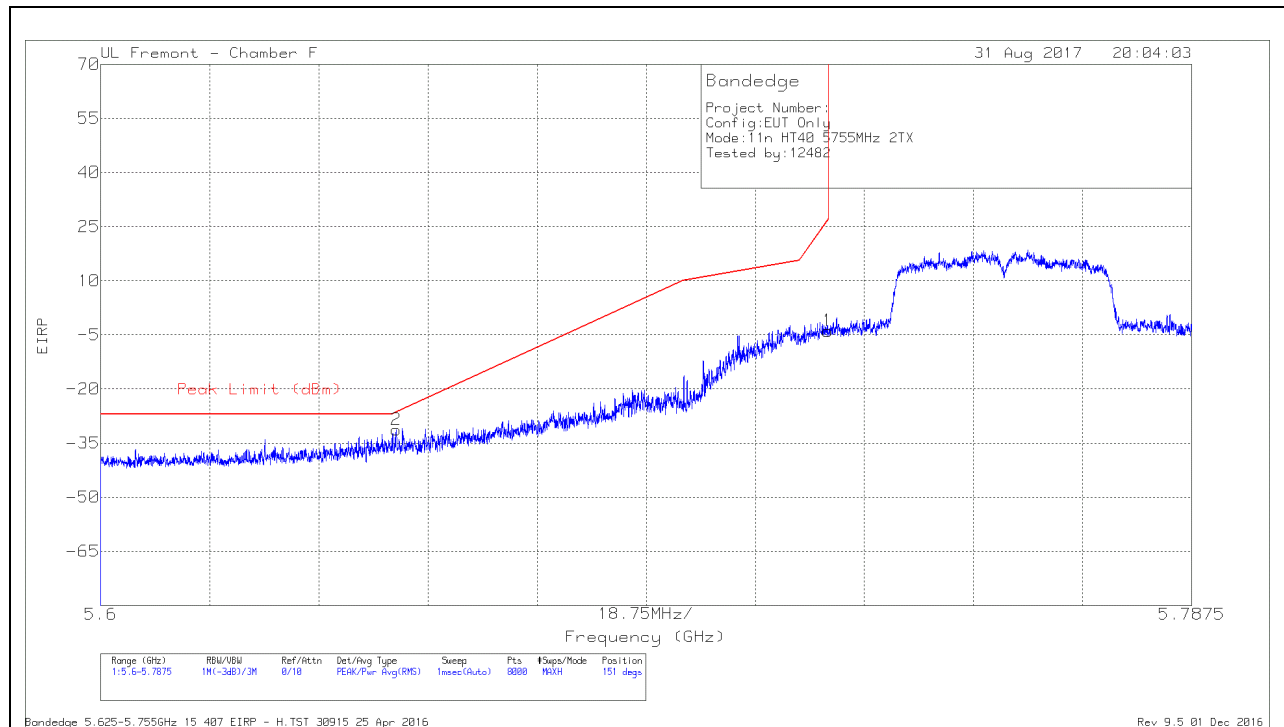2TX Antenna A + Antenna B CDD MODE**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	5.725	-32.72	Pk	35	-18	11.8	0	-3.92	26.96	-30.88	151	266	H
2	5.651	-59.91	Pk	34.9	-18.1	11.8	0	-31.31	-26.43	-4.88	151	266	H

Pk - Peak detector


VERTICAL RESULT

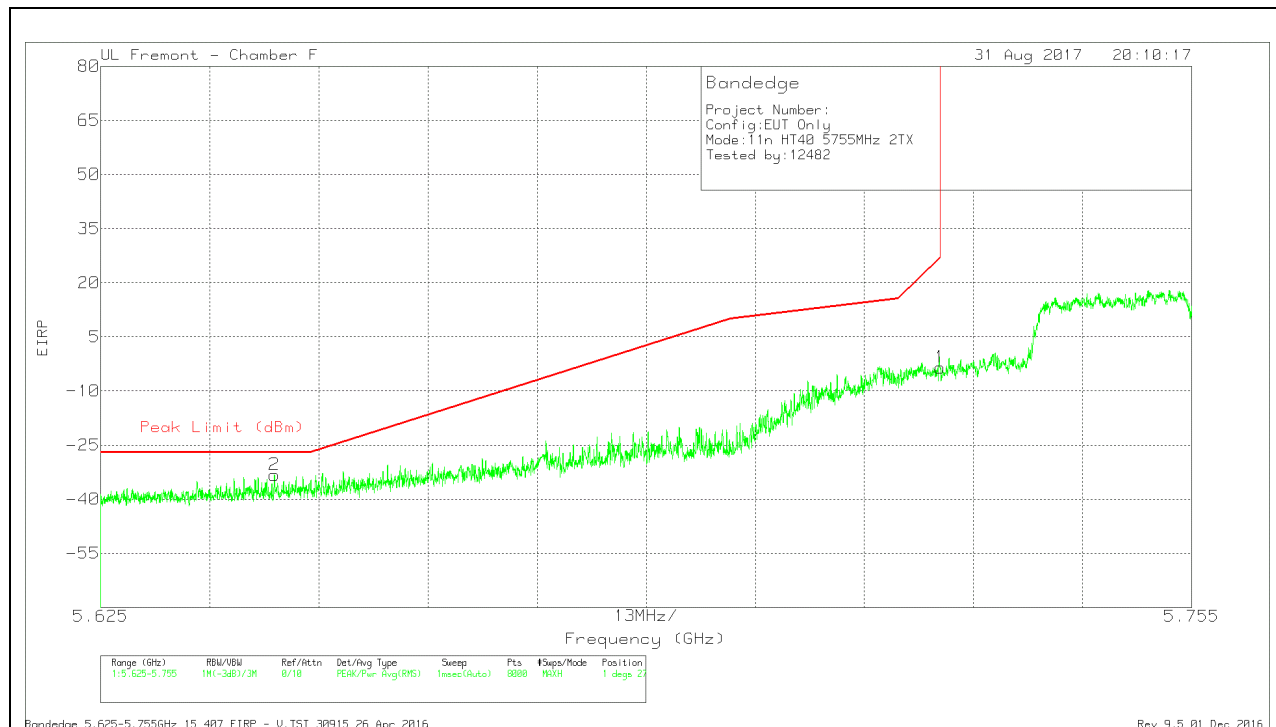

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	5.725	-32.3	Pk	35	-18	11.8	0	-3.5	27	-30.5	1	276	V
2	5.646	-61.77	Pk	34.9	-18.2	11.8	0	-33.27	-27	-6.27	1	276	V

Pk - Peak detector


HORIZONTAL RESULT

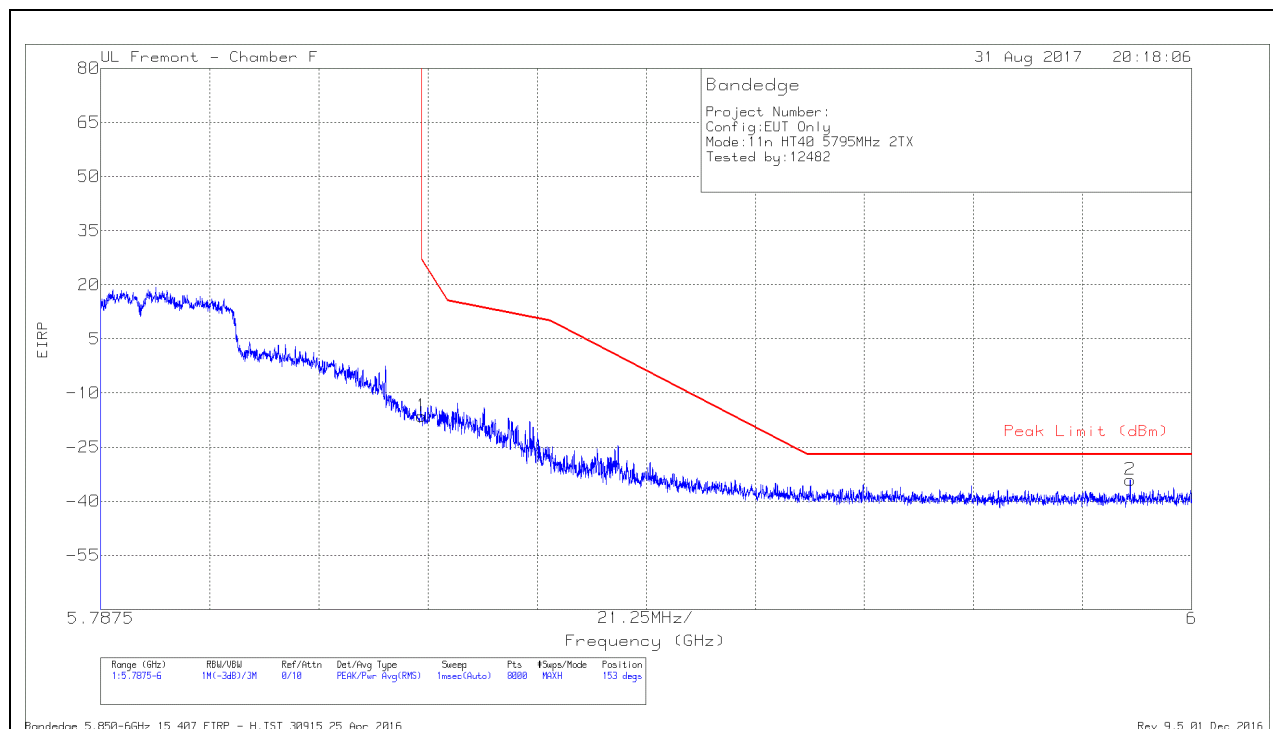

Marker	Frequ ncy (GHz)	Meter Readin g (dBm)	Det	AF T119 (dB/m)	Amp/C bl/Fitr/ Pad (dB)	Conver sion Factor (dB)	DC Corr (dB)	Correct ed Readin g EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimet h (Degs)	Height (cm)	Polarit y
1	5.85	-45.16	Pk	35.1	-18.1	11.8	0	-16.36	26.98	-43.34	153	238	H
2	5.988	-63.03	Pk	35.2	-18	11.8	0	-34.03	-27	-7.03	153	238	H

Pk - Peak detector

VERTICAL RESULT

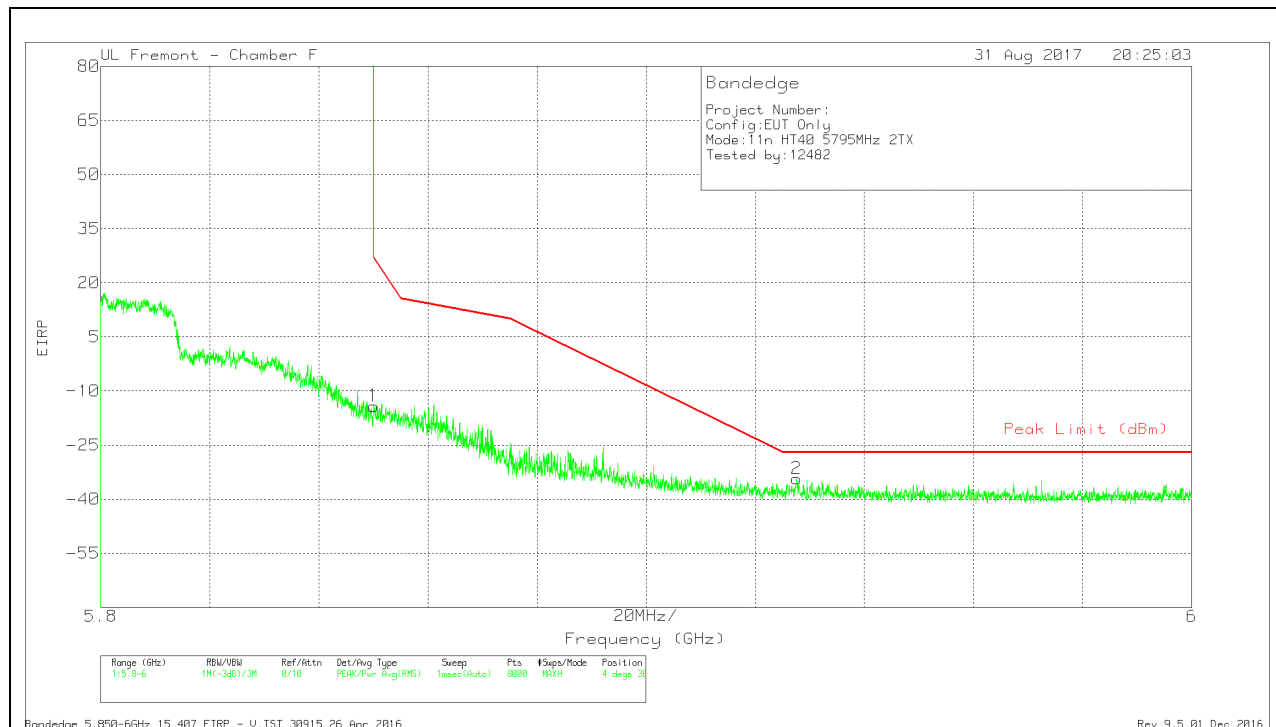

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	5.85	-43.02	Pk	35.1	-18.1	11.8	0	-14.22	26.99	-41.21	4	362	V
2	5.928	-63.02	Pk	35.2	-18.3	11.8	0	-34.32	-27	-7.32	4	362	V

Pk - Peak detector