



SAR EVALUATION REPORT

Applicant Name:

Apple, Inc.
1 Infinite Loop
Cupertino, CA 95014

Date of Testing:

06/19/17 – 08/21/17

Test Site/Location:

PCTEST Lab, San Jose, CA, USA

Document Serial No.:

1C1706160002-60-01-R3.BCG

FCC ID:
BCG-A1860
APPLICANT:
APPLE, INC.
DUT Type:

Watch

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:

A1860

Additional Model:

A1957

Equipment Class	Band & Mode	Tx Frequency	SAR	
			1 gm Head W/kg	10 gm Extremity (W/kg)
PCT	UMTS 850	826.40 - 846.60 MHz	0.11	< 0.1
PCT	UMTS 1750	1712.4 - 1752.6 MHz	0.53	0.18
PCT	UMTS 1900	1852.4 - 1907.6 MHz	0.51	0.17
PCT	LTE Band 12	699.7 - 715.3 MHz	< 0.1	< 0.1
PCT	LTE Band 12	706.5 - 713.5 MHz	N/A	
PCT	LTE Band 13	779.5 - 784.5 MHz	0.12	< 0.1
PCT	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.11	< 0.1
PCT	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.10	< 0.1
PCT	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.37	0.13
PCT	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.36	0.13
PCT	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	
PCT	LTE Band 41	2498.5 - 2687.5 MHz	0.13	< 0.1
DTS	2.4 GHz WLAN	2412 - 2472 MHz	< 0.1	< 0.1
DSS/DTS	Bluetooth	2402 - 2480 MHz	< 0.1	< 0.1
Simultaneous SAR per KDB 690783 D01v01r03:			0.62	0.21

Note: This revised Test Report (S/N: 1C1706160002-60-01-R3.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This watch has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President


The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmpfai.info.

FCC ID: BCG-A1860	SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 1 of 61

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	7
3	INTRODUCTION	8
4	DOSIMETRIC ASSESSMENT	9
5	TEST CONFIGURATION POSITIONS FOR WRIST-WORN DEVICES	10
6	RF EXPOSURE LIMITS	11
7	FCC MEASUREMENT PROCEDURES	12
8	RF CONDUCTED POWERS	16
9	SYSTEM VERIFICATION	34
10	SAR DATA SUMMARY	38
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	52
12	SAR MEASUREMENT VARIABILITY	56
13	EQUIPMENT LIST	57
14	MEASUREMENT UNCERTAINTIES	58
15	CONCLUSION	59
16	REFERENCES	60
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 2 of 61

1 DEVICE UNDER TEST

1.1 Device Overview

Table 1-1
Summary EUT Bands/Modes

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

1.2 Power Reduction for SAR

There is no power reduction used for any band mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

Table 1-2
Summary Max Conducted Powers – UMTS Mode

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	24.5	23.5	23.5
	Nominal	23.5	22.5	22.5
UMTS Band 4 (1750 MHz)	Maximum	24.5	23.5	23.5
	Nominal	23.5	22.5	22.5
UMTS Band 2 (1900 MHz)	Maximum	24.5	23.5	23.5
	Nominal	23.5	22.5	22.5

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 3 of 61

Table 1-3
Summary Max Conducted Powers – LTE Mode

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	24.0
	Nominal	23.0
LTE Band 17	Maximum	24.0
	Nominal	23.0
LTE Band 13	Maximum	24.0
	Nominal	23.0
LTE Band 26 (Cell)	Maximum	24.0
	Nominal	23.0
LTE Band 5 (Cell)	Maximum	24.0
	Nominal	23.0
LTE Band 4 (AWS)	Maximum	24.0
	Nominal	23.0
LTE Band 25 (PCS)	Maximum	24.0
	Nominal	23.0
LTE Band 2 (PCS)	Maximum	24.0
	Nominal	23.0
LTE Band 41	Maximum	24.0
	Nominal	23.0

Table 1-4
Summary Max Conducted Powers – WIFI Mode

Mode / Band	Modulated Average (dBm)				
	Ch. 1-10	Ch. 11	Ch. 12	Ch. 13	
IEEE 802.11b (2.4 GHz)	Maximum	19.5	19.5	19.5	18.0
IEEE 802.11g (2.4 GHz)	Maximum	19.5	17.5	15.5	8.0
IEEE 802.11n (2.4 GHz)	Maximum	19.5	17.5	15.5	8.0

Table 1-5
Summary Max Conducted Powers – Bluetooth Mode

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE (ePA)	Maximum	19.0
Bluetooth BDR/LE (iPA)	Maximum	13.0
Bluetooth EDR (ePA)	Maximum	13.5
Bluetooth EDR (iPA)	Maximum	9.0

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 4 of 61

1.4 DUT Antenna Locations

A diagram showing the location of the device antennas can be found in Appendix F.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-1
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-6
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Extremity
1	UMTS + 2.4 GHz WI-FI	Yes	Yes
2	UMTS + 2.4 GHz Bluetooth	Yes	Yes
3	LTE + 2.4 GHz WI-FI	Yes	Yes
4	LTE + 2.4 GHz Bluetooth	Yes	Yes

1. 2.4 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. All licensed modes share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN scenario.
4. This device supports VoLTE and VoWIFI.

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Approved by: Quality Manager Page 5 of 61

1.7 Miscellaneous SAR Test Considerations

(A) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports both LTE Band 12 and LTE Band 17. Since the supported frequency span for LTE Band 17 falls completely within the supported frequency span for LTE Band 12, both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE Band 12.

This device supports both LTE Band 2 and LTE Band 25. Since the supported frequency span for LTE Band 2 falls completely within the supported frequency span for LTE Band 25, both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE Band 25.

1.8 Guidance Applied

- FCC KDB Publication 941225 D01v03r01, D05v02r05 (3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance, Wrist-worn Device Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

1.10 Device Housing Types and Wrist Band Types

This device has three housing types that were all evaluated for SAR. The device can also be used with different wrist band accessories. All metallic wrist bands were tested, and the sport band non-metallic wrist band was tested fully for all required exposure conditions. Other non-metallic wrist bands were checked to be similar or lower in SAR.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 6 of 61

2 LTE INFORMATION

LTE Information					
FCC ID	BCG-A1860				
Form Factor	Portable Wrist-worn Device				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz) LTE Band 17 (706.5 - 713.5 MHz) LTE Band 13 (779.5 - 784.5 MHz) LTE Band 26 (Cell) (814.7 - 848.3 MHz) LTE Band 5 (Cell) (824.7 - 848.3 MHz) LTE Band 4 (AWS) (1710.7 - 1754.3 MHz) LTE Band 25 (PCS) (1850.7 - 1914.3 MHz) LTE Band 2 (PCS) (1850.7 - 1909.3 MHz) LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17: 5 MHz, 10 MHz LTE Band 13: 5 MHz, 10 MHz LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)		715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)		714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)		713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)		711 (23130)	
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)		713.5 (23825)	
LTE Band 17: 10 MHz	709 (23780)	710 (23790)		711 (23800)	
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)		784.5 (23255)	
LTE Band 13: 10 MHz	N/A	782 (23230)		N/A	
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)		848.3 (27033)	
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)		847.5 (27025)	
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)		846.5 (27015)	
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)		844 (26990)	
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)		848.3 (20643)	
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)		847.5 (20635)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)		846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)		844 (20600)	
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)		1754.3 (20393)	
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)		1753.5 (20385)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)		1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)		1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20225)	1732.5 (20175)		1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)		1745 (20300)	
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	1882.5 (26365)		1914.3 (26683)	
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	1882.5 (26365)		1913.5 (26675)	
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	1882.5 (26365)		1912.5 (26665)	
LTE Band 25 (PCS): 10 MHz	1855 (26090)	1882.5 (26365)		1910 (26640)	
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	1882.5 (26365)		1907.5 (26615)	
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)		1905 (26590)	
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)		1909.3 (19193)	
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)		1908.5 (19185)	
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)		1907.5 (19175)	
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)		1905 (19150)	
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)		1902.5 (19125)	
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)		1900 (19100)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	1				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3–6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Release 10 Additional Information	This device does not support full CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eICIC, WiFi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: BCG-A1860	 PCTEST [®] ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 7 of 61	

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1
SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

σ = conductivity of the tissue-simulating material (S/m)

ρ = mass density of the tissue-simulating material (kg/m³)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 8 of 61

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points ($10 \times 10 \times 10$) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid		Graded Grid	
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)*$	$\Delta z_{zoom}(n>1)*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

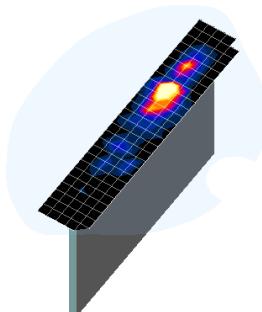


Figure 4-1
Sample SAR Area Scan

FCC ID: BCG-A1860	PCTEST® ENGINEERING LABORATORY, INC.			SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch			

5 TEST CONFIGURATION POSITIONS FOR WRIST-WORN DEVICES

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. Additionally, a manufacturer provided low-loss foam was used to position the device for head SAR evaluations.

5.2 Positioning for Head

Devices that are designed to be worn on the wrist may operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. When next-to-mouth SAR evaluation is required, the device is positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The device is evaluated with wrist bands strapped together to represent normal use conditions.

5.3 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. When extremity SAR evaluation is required, the device is evaluated with the back of the device touching the flat phantom, which is filled with body tissue-equivalent medium. The device was evaluated with Sport wrist band unstrapped and touching the phantom. For Metal Loop and Metal Links wrist bands, the device was evaluated with wrist bands strapped and the distance between wrist bands and the phantom was minimized to represent the spacing created by actual use conditions.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 10 of 61

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population (W/kg) or (mW/g)</i>	CONTROLLED ENVIRONMENT <i>Occupational (W/kg) or (mW/g)</i>
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Approved by: Quality Manager Page 11 of 61

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCCh and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 12 of 61

7.4.2 Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

7.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 13 of 61

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg for 1g SAR and > 3.625 W/kg for 10g SAR, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg for 1g SAR and < 2.0 W/kg for 10g SAR.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg for 1g SAR and < 3.625 W/kg for 10g SAR.

7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 14 of 61

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is $> 0.8 \text{ W/kg}$, SAR is required for that position using the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is $> 1.2 \text{ W/kg}$. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 15 of 61

8 RF CONDUCTED POWERS

8.1 UMTS Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.99	22.89	23.08	23.41	23.43	23.57	23.15	23.16	23.15	-
99		12.2 kbps AMR	23.00	23.01	23.00	23.08	23.12	23.04	23.10	22.89	22.99	-
6	HSDPA	Subtest 1	22.28	22.27	22.28	22.01	22.08	22.12	22.05	22.04	22.01	0
6		Subtest 2	22.17	22.15	22.17	22.02	22.09	22.21	22.07	22.06	22.03	0
6		Subtest 3	21.51	21.55	21.61	21.57	21.64	21.79	21.52	21.50	21.58	0.5
6		Subtest 4	21.62	21.58	21.59	21.52	21.66	21.72	21.64	21.53	21.51	0.5
6	HSUPA	Subtest 1	21.60	21.53	21.52	21.65	21.63	21.50	21.53	21.62	21.50	0
6		Subtest 2	21.17	20.98	21.00	20.64	20.56	20.51	20.67	20.38	20.97	2
6		Subtest 3	21.20	21.22	21.28	21.01	21.08	21.02	20.92	20.89	21.03	1
6		Subtest 4	21.14	21.15	21.22	21.24	21.21	21.09	21.15	21.22	21.05	2
6		Subtest 5	22.12	22.10	22.01	22.13	22.11	22.07	22.07	21.98	21.96	0

This device does not support DC-HSDPA.

The manufacturer has confirmed the HSPA Powers are operating within expected tolerances for the implementation in this model.

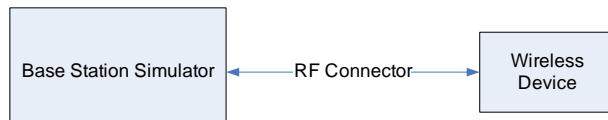


Figure 8-1
Power Measurement Setup

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch			

8.2 LTE Conducted Powers

8.2.1 LTE Band 12

Table 8-1
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.15	0	0
	1	25	22.39		0
	1	49	22.26		0
	25	0	21.30		1
	25	12	21.49	0-1	1
	25	25	21.56		1
	50	0	21.45		1
	1	0	21.61	0-1	1
16QAM	1	25	21.72		1
	1	49	21.61		1
	25	0	20.33	0-2	2
	25	12	20.40		2
	25	25	20.46		2
	50	0	20.33		2

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-2
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.50	22.40	22.57	0	0
	1	12	22.57	22.56	22.59		0
	1	24	22.59	22.60	22.61		0
	12	0	21.51	21.52	21.51	0-1	1
	12	6	21.52	21.61	21.56		1
	12	13	21.57	21.56	21.54		1
	25	0	21.51	21.53	21.52		1
16QAM	1	0	21.72	21.78	22.07	0-1	1
	1	12	21.85	21.98	22.13		1
	1	24	21.81	21.97	22.04		1
	12	0	20.50	20.58	20.53	0-2	2
	12	6	20.54	20.63	20.59		2
	12	13	20.56	20.65	20.57		2
	25	0	20.52	20.62	20.52		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 17 of 61

Table 8-3
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 12 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.45	22.52	22.51	0	0
	1	7	22.51	22.60	22.68		0
	1	14	22.48	22.53	22.54		0
	8	0	21.44	21.48	21.49	0-1	1
	8	4	21.52	21.47	21.48		1
	8	7	21.48	21.46	21.50		1
	15	0	21.46	21.46	21.48		1
16QAM	1	0	21.39	21.60	21.55	0-1	1
	1	7	21.50	21.74	21.70		1
	1	14	21.48	21.66	21.59		1
	8	0	20.42	20.49	20.32	0-2	2
	8	4	20.52	20.54	20.39		2
	8	7	20.47	20.47	20.37		2
	15	0	20.45	20.44	20.47		2

Table 8-4
LTE Band 12 Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 12 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.60	22.44	22.50	0	0
	1	2	22.67	22.50	22.57		0
	1	5	22.66	22.41	22.51		0
	3	0	22.64	22.47	22.55		0
	3	2	22.72	22.52	22.60	0-1	0
	3	3	22.64	22.45	22.54		0
	6	0	21.53	21.42	21.47		1
16QAM	1	0	21.75	21.37	21.39	0-1	1
	1	2	21.84	21.35	21.43		1
	1	5	21.73	21.33	21.44		1
	3	0	21.46	21.42	21.45		1
	3	2	21.60	21.50	21.49	0-2	1
	3	3	21.52	21.43	21.47		1
	6	0	20.51	20.50	20.54		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 18 of 61

8.2.2

LTE Band 13

Table 8-5
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHzBandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.07	0	0
	1	25	22.37		0
	1	49	22.26		0
	25	0	21.24		1
	25	12	21.33		1
	25	25	21.32		1
	50	0	21.32		1
	1	0	21.31		1
16QAM	1	25	21.74	0-1	1
	1	49	21.51		1
	25	0	20.46		2
	25	12	20.53	0-2	2
	25	25	20.52		2
	50	0	20.51		2

Table 8-6
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHzBandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.45	0	0
	1	12	22.56		0
	1	24	22.53		0
	12	0	21.52		1
	12	6	21.49		1
	12	13	21.56		1
	25	0	21.47		1
	1	0	22.00		1
16QAM	1	12	22.08	0-1	1
	1	24	21.88		1
	12	0	20.55		2
	12	6	20.53	0-2	2
	12	13	20.59		2
	25	0	20.52		2

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 19 of 61

8.2.3

LTE Band 26 (Cell)

Table 8-7
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) 10 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26740 (819.0 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.51	22.61	22.58	0	0
	1	25	22.65	22.70	22.79		0
	1	49	22.63	22.49	22.80		0
	25	0	21.72	21.55	21.67	0-1	1
	25	12	21.77	21.61	21.76		1
	25	25	21.80	21.47	21.81		1
	50	0	21.78	21.75	21.80		1
16QAM	1	0	21.96	21.84	21.77	0-1	1
	1	25	22.08	21.92	21.97		1
	1	49	22.07	21.78	21.88		1
	25	0	20.66	20.77	20.68	0-2	2
	25	12	20.75	20.78	20.69		2
	25	25	20.77	20.68	20.75		2
	50	0	20.74	20.72	20.76		2

Table 8-8
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) 5 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26715 (816.5 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.65	22.59	22.65	0	0
	1	12	22.69	22.68	22.77		0
	1	24	22.73	22.37	22.76		0
	12	0	21.81	21.62	21.72	0-1	1
	12	6	21.84	21.61	21.81		1
	12	13	21.85	21.58	21.82		1
	25	0	21.82	21.78	21.76		1
16QAM	1	0	21.88	21.59	21.42	0-1	1
	1	12	21.89	21.69	21.67		1
	1	24	21.96	21.53	21.66		1
	12	0	20.78	20.82	20.75	0-2	2
	12	6	20.80	20.84	20.81		2
	12	13	20.81	20.79	20.79		2
	25	0	20.79	20.84	20.78		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 20 of 61

Table 8-9
LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26705 (815.5 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.60	22.66	22.73	0	0
	1	7	22.66	22.58	22.88		0
	1	14	22.67	22.61	22.82		0
	8	0	21.68	21.75	21.79	0-1	1
	8	4	21.75	21.79	21.84		1
	8	7	21.71	21.76	21.86		1
	15	0	21.69	21.67	21.77		1
16QAM	1	0	21.81	21.84	21.83	0-1	1
	1	7	21.89	21.67	21.92		1
	1	14	22.03	21.88	21.86		1
	8	0	20.60	20.77	20.62	0-2	2
	8	4	20.62	20.83	20.67		2
	8	7	20.66	20.81	20.66		2
	15	0	20.73	20.73	20.73		2

Table 8-10
LTE Band 26 (Cell) Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26697 (814.7 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.59	22.58	22.72	0	0
	1	2	22.67	22.60	22.84		0
	1	5	22.64	22.67	22.78		0
	3	0	22.65	22.70	22.83	0-1	0
	3	2	22.72	22.58	22.84		0
	3	3	22.67	22.46	22.77		0
	6	0	21.64	21.68	21.79		1
16QAM	1	0	21.56	21.67	21.80	0-1	1
	1	2	21.58	21.71	21.89		1
	1	5	21.57	21.76	21.87		1
	3	0	21.59	21.64	21.95	0-2	1
	3	2	21.66	21.76	21.96		1
	3	3	21.61	21.67	21.89		1
	6	0	20.70	20.63	20.75		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 21 of 61

8.2.4

LTE Band 5 (Cell)

Table 8-11
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.50	0	0
	1	25	22.58		0
	1	49	22.43		0
	25	0	21.45		1
	25	12	21.55		1
	25	25	21.54		1
	50	0	21.48		1
	1	0	21.60		1
16QAM	1	25	21.58	0-1	1
	1	49	21.35		1
	25	0	20.83		2
	25	12	20.75		2
	25	25	20.36		2
	50	0	20.38		2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-12
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.51	22.64	22.68	0	0
	1	12	22.67	22.71	22.80		0
	1	24	22.46	22.64	22.79		0
	12	0	21.48	21.81	21.75		1
	12	6	21.55	21.64	21.54		1
	12	13	21.51	21.78	21.85		1
	25	0	21.51	21.49	21.50		1
	1	0	21.63	22.06	22.08		1
16QAM	1	12	21.66	21.98	22.03	0-1	1
	1	24	21.89	22.00	22.21		1
	12	0	20.86	20.85	20.78	0-2	2
	12	6	20.78	20.87	20.84		2
	12	13	20.39	20.82	20.82		2
	25	0	20.45	20.87	20.81		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 22 of 61

Table 8-13
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 5 (Cell) 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 20415 (825.5 MHz)	Mid Channel 20525 (836.5 MHz)	High Channel 20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.54	22.74	22.70	0	0
	1	7	22.68	22.85	22.82		0
	1	14	22.66	22.70	22.83		0
	8	0	21.75	21.80	21.72	0-1	1
	8	4	21.80	21.82	21.79		1
	8	7	21.83	21.76	21.84		1
	15	0	21.81	21.78	21.83		1
16QAM	1	0	21.99	21.87	21.80	0-1	1
	1	7	22.11	21.95	21.98		1
	1	14	22.10	21.81	21.91		1
	8	0	20.69	20.80	20.81	0-2	2
	8	4	20.78	20.82	20.72		2
	8	7	20.80	20.71	20.78		2
	15	0	20.77	20.75	20.79		2

Table 8-14
LTE Band 5 (Cell) Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 5 (Cell) 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 20407 (824.7 MHz)	Mid Channel 20525 (836.5 MHz)	High Channel 20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.62	22.79	22.80	0	0
	1	2	22.70	22.82	22.87		0
	1	5	22.67	22.80	22.81		0
	3	0	22.68	22.73	22.86		0
	3	2	22.75	22.81	22.87	0-1	0
	3	3	22.70	22.77	22.82		0
	6	0	21.67	21.71	21.82		1
16QAM	1	0	21.59	21.96	21.83	0-1	1
	1	2	21.61	22.03	21.92		1
	1	5	21.66	21.95	21.90		1
	3	0	21.62	21.67	21.98		1
	3	2	21.65	21.79	21.99	0-2	1
	3	3	21.64	21.70	21.92		1
	6	0	20.73	20.69	20.87		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 23 of 61

8.2.5

LTE Band 4 (AWS)

Table 8-15
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHzBandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.18	0	0
	1	50	22.93		0
	1	99	23.36		0
	50	0	21.86	0-1	1
	50	25	21.79		1
	50	50	21.87		1
	100	0	21.83		1
16QAM	1	0	22.03	0-1	1
	1	50	21.84		1
	1	99	21.87		1
	50	0	20.84	0-2	2
	50	25	20.81		2
	50	50	20.93		2
	100	0	20.91		2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-16
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.11	23.00	23.03	0	0
	1	36	22.90	22.76	22.63		0
	1	74	23.33	22.94	22.78		0
	36	0	21.84	21.75	21.84	0-1	1
	36	18	21.81	21.64	21.69		1
	36	37	21.84	21.70	21.71		1
	75	0	21.80	21.74	21.78		1
16QAM	1	0	22.00	22.03	22.06	0-1	1
	1	36	21.81	21.89	21.89		1
	1	74	21.85	22.04	22.08		1
	36	0	20.81	20.74	20.70	0-2	2
	36	18	20.80	20.68	20.64		2
	36	37	20.92	20.71	20.69		2
	75	0	20.88	20.69	20.77		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 24 of 61

Table 8-17
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 10 MHz Bandwidth				
			Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.93	22.98	22.78	0	0
	1	25	22.92	22.75	22.59		0
	1	49	22.98	22.93	22.72		0
	25	0	21.84	21.74	21.78	0-1	1
	25	12	21.76	21.60	21.63		1
	25	25	21.79	21.69	21.65		1
	50	0	21.78	21.73	21.72		1
16QAM	1	0	22.11	22.10	21.97	0-1	1
	1	25	21.93	21.88	21.83		1
	1	49	22.03	22.02	22.03		1
	25	0	20.84	20.73	20.64		2
	25	12	20.72	20.67	20.58	0-2	2
	25	25	20.76	20.70	20.59		2
	50	0	20.76	20.67	20.67		2

Table 8-18
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 5 MHz Bandwidth				
			Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.02	23.06	23.00	0	0
	1	12	22.61	22.76	22.51		0
	1	24	22.62	22.67	22.37		0
	12	0	21.66	21.64	21.57		1
	12	6	21.65	21.64	21.61	0-1	1
	12	13	21.63	21.57	21.66		1
	25	0	21.54	21.66	21.64		1
	1	0	22.17	21.94	21.81		1
16QAM	1	12	22.10	21.79	21.70	0-1	1
	1	24	22.06	21.81	21.71		1
	12	0	20.70	20.64	20.49	0-2	2
	12	6	20.65	20.60	20.50		2
	12	13	20.64	20.55	20.47		2
	25	0	20.57	20.65	20.48		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 25 of 61

Table 8-19
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 3 MHz Bandwidth				
			Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.86	22.99	22.98	0	0
	1	7	22.80	22.71	22.59		0
	1	14	22.83	23.02	22.65		0
	8	0	21.80	21.67	21.54	0-1	1
	8	4	21.74	21.66	21.58		1
	8	7	21.71	21.73	21.64		1
	15	0	21.72	21.74	21.60		1
16QAM	1	0	22.03	22.02	22.00	0-1	1
	1	7	22.04	22.24	21.76		1
	1	14	21.96	21.97	22.03		1
	8	0	20.69	20.71	20.57	0-2	2
	8	4	20.62	20.68	20.53		2
	8	7	20.60	20.73	20.59		2
	15	0	20.63	20.71	20.60		2

Table 8-20
LTE Band 4 (AWS) Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 1.4 MHz Bandwidth				
			Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.81	22.98	23.00	0	0
	1	2	22.89	22.82	22.62		0
	1	5	22.63	22.64	22.59		0
	3	0	22.71	22.68	22.64		0
	3	2	22.68	22.70	22.62		0
	3	3	22.59	22.61	22.58		0
	6	0	21.66	21.69	21.59	0-1	1
	1	0	21.51	21.78	21.68		1
16QAM	1	2	21.72	21.85	21.72	0-1	1
	1	5	21.66	21.77	21.68		1
	3	0	21.39	21.81	21.64		1
	3	2	21.48	21.88	21.62		1
	3	3	21.45	21.77	21.61	0-2	1
	6	0	20.47	20.60	20.51		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 26 of 61

8.2.6

LTE Band 25 (PCS)

Table 8-21
LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 20 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26140 (1860.0 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.99	22.97	22.75	0	0
	1	50	22.98	22.81	22.65		0
	1	99	23.04	22.99	22.78		0
	50	0	21.90	21.80	21.84	0-1	1
	50	25	21.82	21.66	21.69		1
	50	50	21.85	21.75	21.71		1
	100	0	21.84	21.79	21.78		1
16QAM	1	0	22.54	22.16	22.03	0-1	1
	1	50	22.31	21.94	21.89		1
	1	99	22.55	22.08	22.09		1
	50	0	20.90	20.79	20.70	0-2	2
	50	25	20.78	20.73	20.64		2
	50	50	20.82	20.76	20.65		2
	100	0	20.82	20.73	20.73		2

Table 8-22
LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 15 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26115 (1857.5 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.89	22.82	22.47	0	0
	1	36	22.83	22.74	22.30		0
	1	74	22.86	23.05	22.68		0
	36	0	21.83	21.70	21.57	0-1	1
	36	18	21.77	21.69	21.52		1
	36	37	21.74	21.76	21.67		1
	75	0	21.75	21.77	21.63		1
16QAM	1	0	22.13	22.18	21.88	0-1	1
	1	36	22.07	22.27	21.79		1
	1	74	21.99	22.00	22.06		1
	36	0	20.72	20.74	20.60	0-2	2
	36	18	20.65	20.71	20.56		2
	36	37	20.63	20.76	20.62		2
	75	0	20.66	20.74	20.63		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 27 of 61

Table 8-23
LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 10 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.83	22.78	22.64	0	0
	1	25	22.64	22.57	22.45		0
	1	49	22.65	22.70	22.40		0
	25	0	21.69	21.67	21.60	0-1	1
	25	12	21.68	21.67	21.59		1
	25	25	21.66	21.60	21.58		1
	50	0	21.67	21.63	21.55		1
16QAM	1	0	22.20	21.97	21.84	0-1	1
	1	25	22.13	21.82	21.73		1
	1	49	22.09	21.84	21.74		1
	25	0	20.73	20.67	20.52	0-2	2
	25	12	20.68	20.63	20.53		2
	25	25	20.67	20.58	20.50		2
	50	0	20.66	20.57	20.54		2

Table 8-24
LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 5 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.61	22.94	22.72	0	0
	1	12	22.64	22.78	22.60		0
	1	24	22.63	22.96	22.75		0
	12	0	21.69	21.77	21.81	0-1	1
	12	6	21.63	21.66	21.66		1
	12	13	21.65	21.72	21.68		1
	25	0	21.63	21.76	21.75		1
16QAM	1	0	22.13	22.13	22.03	0-1	1
	1	12	22.22	21.91	21.86		1
	1	24	22.12	22.06	22.05		1
	12	0	20.64	20.76	20.67	0-2	2
	12	6	20.66	20.70	20.61		2
	12	13	20.70	20.73	20.66		2
	25	0	20.65	20.71	20.74		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 28 of 61

Table 8-25
LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 3 MHz Bandwidth				
			Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.88	22.81	22.66	0	0
	1	7	22.69	22.63	22.47		0
	1	14	22.70	22.73	22.45		0
	8	0	21.74	21.77	21.62	0-1	1
	8	4	21.73	21.70	21.61		1
	8	7	21.71	21.63	21.60		1
	15	0	21.72	21.66	21.57		1
16QAM	1	0	22.25	22.00	21.86	0-1	1
	1	7	22.18	21.85	21.75		1
	1	14	22.14	21.87	21.76		1
	8	0	20.75	20.70	20.54	0-2	2
	8	4	20.73	20.66	20.55		2
	8	7	20.72	20.61	20.51		2
	15	0	20.73	20.66	20.56		2

Table 8-26
LTE Band 25 (PCS) Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 1.4 MHz Bandwidth				
			Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.76	22.75	22.54	0	0
	1	2	22.84	22.77	22.57		0
	1	5	22.58	22.59	22.54		0
	3	0	22.66	22.63	22.50		0
	3	2	22.63	22.65	22.57		0
	3	3	22.54	22.56	22.53		0
	6	0	21.61	21.64	21.36	0-1	1
16QAM	1	0	21.46	21.73	21.63	0-1	1
	1	2	21.67	21.80	21.67		1
	1	5	21.61	21.72	21.63		1
	3	0	21.34	21.76	21.59		1
	3	2	21.43	21.83	21.57		1
	3	3	21.40	21.72	21.56		1
	6	0	20.42	20.55	20.46	0-2	2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 29 of 61

8.2.7

LTE Band 41

Table 8-27
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 20 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel		
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power [dBm]									
QPSK	1	0	23.00	22.84	23.00	22.94	23.13	0	0
	1	50	22.87	22.74	22.81	22.90	22.89		0
	1	99	23.41	23.09	23.12	23.30	23.24		0
	50	0	21.92	21.70	21.72	21.95	21.82	0-1	1
	50	25	21.88	21.71	21.69	21.92	21.74		1
	50	50	22.07	21.76	21.85	21.91	21.78		1
	100	0	21.91	21.75	21.81	21.90	21.80		1
16QAM	1	0	21.86	22.18	22.32	21.97	22.05	0-1	1
	1	50	21.83	22.00	22.20	21.87	21.80		1
	1	99	22.31	22.30	22.50	22.18	22.20		1
	50	0	20.80	20.90	20.80	20.87	20.82	0-2	2
	50	25	20.78	20.83	20.75	20.88	20.74		2
	50	50	20.93	20.89	20.84	20.87	20.78		2
	100	0	20.96	20.93	20.81	20.88	20.80		2

Table 8-28
LTE Band 41 Conducted Powers - 15 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 15 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel		
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power [dBm]									
QPSK	1	0	22.67	22.69	22.72	22.74	22.76	0	0
	1	36	22.72	22.76	22.87	22.72	22.78		0
	1	74	22.99	22.82	22.99	22.87	22.84		0
	36	0	21.79	21.64	21.78	21.81	21.71	0-1	1
	36	18	21.81	21.70	21.80	21.78	21.69		1
	36	37	21.94	21.71	21.75	21.81	21.68		1
	75	0	21.83	21.67	21.71	21.73	21.69		1
16QAM	1	0	21.75	21.74	21.41	21.86	21.73	0-1	1
	1	36	21.77	21.82	21.40	21.88	21.75		1
	1	74	21.95	21.97	21.52	21.99	21.78		1
	36	0	20.69	20.68	20.72	20.77	20.63	0-2	2
	36	18	20.73	20.69	20.79	20.82	20.61		2
	36	37	20.84	20.70	20.84	20.81	20.65		2
	75	0	20.78	20.64	20.77	20.69	20.68		2

FCC ID: BCG-A1860	 PCTEST [®] ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 30 of 61

Table 8-29
LTE Band 41 Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 10 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.69	22.75	22.59	22.56	22.55	0	0
	1	25	22.81	22.92	22.81	22.66	22.58		0
	1	49	22.85	22.88	22.86	22.85	22.62		0
	25	0	21.86	21.77	21.75	21.67	21.70	0-1	1
	25	12	21.83	21.79	21.74	21.79	21.77		1
	25	25	21.91	21.84	21.81	21.80	21.68		1
	50	0	21.83	21.80	21.74	21.78	21.70		1
	1	0	21.82	21.51	21.55	21.60	21.61		1
16QAM	1	25	21.97	21.71	21.67	21.82	21.63	0-1	1
	1	49	21.94	21.67	21.72	21.88	21.81		1
	25	0	20.81	20.72	20.78	20.64	20.71		2
	25	12	20.83	20.79	20.76	20.75	20.78	0-2	2
	25	25	20.84	20.80	20.84	20.71	20.70		2
	50	0	20.75	20.72	20.74	20.71	20.67		2

Table 8-30
LTE Band 41 Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 5 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.71	22.84	22.76	22.65	22.62	0	0
	1	12	22.75	22.82	22.78	22.63	22.59		0
	1	24	22.86	22.86	22.87	22.75	22.66		0
	12	0	21.78	21.75	21.72	21.69	21.75	0-1	1
	12	6	21.81	21.74	21.69	21.66	21.77		1
	12	13	21.85	21.79	21.74	21.76	21.65		1
	25	0	21.78	21.76	21.69	21.73	21.75		1
	1	0	21.93	21.68	21.64	21.79	21.69	0-1	1
16QAM	1	12	21.97	21.98	21.86	21.85	21.82		1
	1	24	22.00	21.69	21.73	21.87	21.72		1
	12	0	20.73	20.76	20.77	20.58	20.68	0-2	2
	12	6	20.79	20.81	20.75	20.62	20.73		2
	12	13	20.77	20.79	20.80	20.68	20.66		2
	25	0	20.69	20.72	20.69	20.65	20.72		2

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 31 of 61

8.3 WLAN Conducted Powers

Table 8-31
2.4 GHz WLAN Average RF Power

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	
2412	1	19.42	19.01	19.35	
2437	6	19.47	19.30	19.47	
2457	10	19.21	19.25	19.45	
2462	11	19.03	17.46	17.45	

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

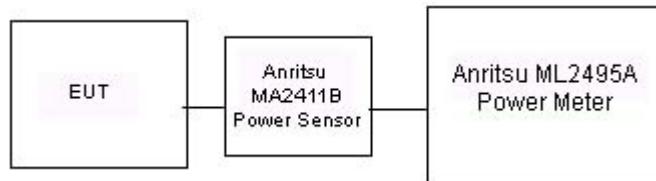


Figure 8-2
Power Measurement Setup

FCC ID: BCG-A1860	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 32 of 61	

8.4 Bluetooth Conducted Powers

Table 8-32
Bluetooth Average RF Power

Frequency [MHz]	Modulation	Power Scheme	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	16.78	47.643
2441	GFSK	ePA	39	18.95	78.524
2480	GFSK	ePA	78	16.95	49.545
2402	GFSK	iPA	0	12.81	19.099
2441	GFSK	iPA	39	12.98	19.861
2480	GFSK	iPA	78	12.30	16.982
2402	8PSK	ePA	0	13.36	21.677
2441	8PSK	ePA	39	13.46	22.182
2480	8PSK	ePA	78	13.45	22.131
2402	8PSK	iPA	0	8.60	7.244
2441	8PSK	iPA	39	8.81	7.603
2480	8PSK	iPA	78	8.78	7.551

Note: The bolded data rate and channel above were tested for SAR. Bluetooth was evaluated with a test mode with 100% transmission duty factor.

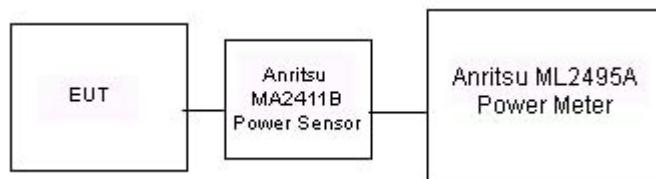


Figure 8-3
Power Measurement Setup

FCC ID: BCG-A1860		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 33 of 61

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
6/26/2017	750H	19.6	700	0.849	41.648	0.889	42.201	-4.50%	-1.31%
			710	0.855	41.471	0.890	42.149	-3.93%	-1.61%
			740	0.882	40.996	0.893	41.994	-1.23%	-2.38%
			755	0.897	40.806	0.894	41.916	0.34%	-2.65%
			770	0.909	40.535	0.895	41.838	1.56%	-3.11%
			785	0.926	40.388	0.896	41.760	3.35%	-3.29%
6/26/2017	850H	19.3	820	0.899	41.269	0.899	41.578	0.00%	-0.74%
			835	0.911	41.056	0.900	41.500	1.22%	-1.07%
			850	0.925	40.766	0.916	41.500	0.98%	-1.77%
7/7/2017	850H	21.0	820	0.909	42.013	0.899	41.578	1.11%	1.05%
			835	0.922	41.825	0.900	41.500	2.44%	0.78%
			850	0.937	41.644	0.916	41.500	2.29%	0.35%
8/18/2017	850H	18.8	820	0.925	43.097	0.899	41.578	2.89%	3.65%
			835	0.933	42.866	0.900	41.500	3.67%	3.29%
			850	0.949	42.739	0.916	41.500	3.60%	2.99%
6/26/2017	1750H	21.8	1710	1.322	40.147	1.348	40.142	-1.93%	0.01%
			1750	1.357	39.986	1.371	40.079	-1.02%	-0.23%
			1790	1.394	39.726	1.394	40.016	0.00%	-0.72%
7/10/2017	1750H	20.5	1710	1.365	39.321	1.348	40.142	1.26%	-2.05%
			1750	1.407	39.149	1.371	40.079	2.63%	-2.32%
			1790	1.450	38.939	1.394	40.016	4.02%	-2.69%
6/20/2017	1900H	21.5	1850	1.391	40.144	1.400	40.000	-0.64%	0.36%
			1880	1.419	40.006	1.400	40.000	1.36%	0.02%
			1910	1.450	39.746	1.400	40.000	3.57%	-0.63%
6/22/2017	1900H	20.9	1850	1.389	39.160	1.400	40.000	-0.79%	-2.10%
			1880	1.398	38.822	1.400	40.000	-0.14%	-2.94%
			1910	1.459	38.610	1.400	40.000	4.21%	-3.48%
6/28/2017	2450H	23.4	2400	1.783	39.617	1.756	39.289	1.54%	0.83%
			2450	1.838	39.444	1.800	39.200	2.11%	0.62%
			2500	1.900	39.292	1.855	39.136	2.43%	0.40%
7/3/2017	2450H	23.5	2400	1.821	39.751	1.756	39.289	3.70%	1.18%
			2450	1.877	39.507	1.800	39.200	4.28%	0.78%
			2500	1.938	39.329	1.855	39.136	4.47%	0.49%
			2550	1.997	39.118	1.909	39.073	4.61%	0.12%
7/13/2017	2450H	23.7	2400	1.769	39.688	1.756	39.289	0.74%	1.02%
			2450	1.828	39.519	1.800	39.200	1.56%	0.81%
			2500	1.889	39.384	1.855	39.136	1.83%	0.63%

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 34 of 61

Table 9-2
Measured Body Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	%dev σ	%dev ϵ
6/22/2017	750B	22.2	700	0.928	54.987	0.959	55.726	-3.23%	-1.33%
			710	0.939	55.068	0.960	55.687	-2.19%	-1.11%
			740	0.966	54.467	0.963	55.570	0.31%	-1.98%
			755	0.983	54.500	0.964	55.512	1.97%	-1.82%
			770	1.007	54.233	0.965	55.453	4.35%	-2.20%
			785	1.014	53.923	0.966	55.395	4.97%	-2.66%
6/21/2017	850B	21.5	820	0.992	55.096	0.969	55.258	2.37%	-0.29%
			835	1.008	54.941	0.970	55.200	3.92%	-0.47%
			850	1.023	54.779	0.988	55.154	3.54%	-0.68%
7/4/2017	850B	21.1	820	0.990	54.633	0.969	55.258	2.17%	-1.13%
			835	1.005	54.476	0.970	55.200	3.61%	-1.31%
			850	1.020	54.315	0.988	55.154	3.24%	-1.52%
8/21/2017	850B	21.1	820	0.975	55.568	0.969	55.258	0.62%	0.56%
			835	0.998	55.281	0.970	55.200	2.89%	0.15%
			850	1.014	55.089	0.988	55.154	2.63%	-0.12%
7/3/2017	1750B	19.8	1710	1.483	52.768	1.463	53.537	1.37%	-1.44%
			1750	1.532	52.612	1.488	53.432	2.96%	-1.53%
			1790	1.578	52.438	1.514	53.326	4.23%	-1.67%
6/19/2017	1900B	21.5	1850	1.502	51.519	1.520	53.300	-1.18%	-3.34%
			1880	1.532	51.399	1.520	53.300	0.79%	-3.57%
			1910	1.564	51.306	1.520	53.300	2.89%	-3.74%
6/19/2017	2450B	22.8	2400	1.886	51.786	1.902	52.767	-0.84%	-1.86%
			2450	1.952	51.593	1.950	52.700	0.10%	-2.10%
			2500	2.025	51.439	2.021	52.636	0.20%	-2.27%
			2550	2.091	51.266	2.092	52.573	-0.05%	-2.49%
6/29/2017	2450B	21.9	2400	1.955	52.397	1.902	52.767	2.79%	-0.70%
			2450	2.023	52.166	1.950	52.700	3.74%	-1.01%
			2500	2.094	51.957	2.021	52.636	3.61%	-1.29%
7/6/2017	2450B	20.8	2400	1.971	50.978	1.902	52.767	3.63%	-3.39%
			2450	2.039	50.749	1.950	52.700	4.56%	-3.70%
			2500	2.101	50.611	2.021	52.636	3.96%	-3.85%
7/14/2017	2450B	22.8	2400	1.945	52.858	1.902	52.767	2.26%	0.17%
			2450	2.002	52.628	1.950	52.700	2.67%	-0.14%
			2500	2.082	52.428	2.021	52.636	3.02%	-0.40%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch			Page 35 of 61

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-3
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
CAL2	750	HEAD	06/26/2017	19.1	19.6	0.200	1097	3347	1.690	8.220	8.450	2.80%
CAL1	850	HEAD	06/26/2017	19.5	19.3	0.200	1009	7420	2.120	10.100	10.600	4.95%
CAL3	850	HEAD	07/07/2017	19.8	21.0	0.200	1010	3118	2.020	9.680	10.100	4.34%
CAL3	850	HEAD	08/18/2017	20.7	19.5	0.200	1010	3118	2.040	9.680	10.200	5.37%
CAL3	1750	HEAD	06/26/2017	22.2	21.8	0.100	1104	3118	3.570	36.000	35.700	-0.83%
CAL1	1750	HEAD	07/10/2017	20.5	20.5	0.100	1104	7420	3.630	36.000	36.300	0.83%
CAL3	1900	HEAD	06/20/2017	20.3	21.5	0.100	5d180	3118	4.070	40.500	40.700	0.49%
CAL3	1900	HEAD	06/22/2017	20.7	20.9	0.100	5d181	3118	4.170	39.700	41.700	5.04%
CAL3	2450	HEAD	06/28/2017	21.5	22.5	0.100	921	3118	5.180	52.100	51.800	-0.58%
CAL3	2450	HEAD	07/03/2017	21.7	23.5	0.100	921	3118	5.270	52.100	52.700	1.15%
CAL2	2450	HEAD	07/13/2017	23.1	22.4	0.100	921	3347	5.090	52.100	50.900	-2.30%

FCC ID: BCG-A1860	 PCTEST [®] ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 36 of 61

Table 9-4
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
CAL2	750	BODY	06/22/2017	19.3	20.2	0.200	1097	3347	1.140	5.690	5.700	0.18%
CAL1	850	BODY	06/21/2017	20.0	21.5	0.200	1009	7420	1.370	6.430	6.850	6.53%
CAL1	850	BODY	07/04/2017	21.8	21.5	0.200	1009	7420	1.370	6.430	6.850	6.53%
CAL4	850	BODY	08/21/2017	19.9	19.4	0.200	1010	3329	1.380	6.570	6.900	5.02%
CAL1	1750	BODY	07/03/2017	20.2	20.0	0.100	1104	7420	1.950	19.300	19.500	1.04%
CAL1	1900	BODY	06/19/2017	19.1	21.5	0.100	5d181	7420	2.040	20.900	20.400	-2.39%
CAL4	2450	BODY	06/19/2017	21.7	22.0	0.100	921	3329	2.310	24.000	23.100	-3.75%
CAL2	2450	BODY	06/29/2017	19.7	20.4	0.100	921	3347	2.260	24.000	22.600	-5.83%
CAL2	2450	BODY	07/06/2017	20.8	20.8	0.100	921	3347	2.390	24.000	23.900	-0.42%
CAL1	2450	BODY	07/14/2017	20.0	22.5	0.100	921	7420	2.440	24.000	24.400	1.67%

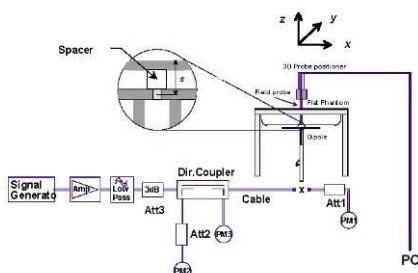


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCG-A1860	 PCTEST [®] ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch			Page 37 of 61

10 SAR DATA SUMMARY

10.1 Standalone Head SAR Data

Table 10-1
UMTS Head SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	Aluminum	Metal Loop	24.5	22.89	0.07	10 mm	FH7TT00DJ768	1:1	front	0.075	1.449	0.109	
836.60	4183	UMTS 850	RMC	Aluminum	Metal Links	24.5	22.89	0.04	10 mm	FH7TT00DJ768	1:1	front	0.073	1.449	0.106	
836.60	4183	UMTS 850	RMC	Aluminum	Sport	24.5	22.89	0.18	10 mm	FH7TT007J768	1:1	front	0.076	1.449	0.110	
836.60	4183	UMTS 850	RMC	Stainless Steel	Metal Loop	24.5	22.89	0.09	10 mm	FH7TT00GJ776	1:1	front	0.075	1.449	0.109	
836.60	4183	UMTS 850	RMC	Stainless Steel	Metal Links	24.5	22.89	0.01	10 mm	FH7TT00GJ776	1:1	front	0.074	1.449	0.107	
836.60	4183	UMTS 850	RMC	Stainless Steel	Sport	24.5	22.89	0.10	10 mm	FH7TT008J77H	1:1	front	0.077	1.449	0.112	A1
836.60	4183	UMTS 850	RMC	Ceramic	Metal Loop	24.5	22.89	0.08	10 mm	FH7TT008J77R	1:1	front	0.059	1.449	0.085	
836.60	4183	UMTS 850	RMC	Ceramic	Metal Links	24.5	22.89	0.07	10 mm	FH7TT008J77R	1:1	front	0.061	1.449	0.088	
836.60	4183	UMTS 850	RMC	Ceramic	Sport	24.5	22.89	0.05	10 mm	FH7TT00AJ77R	1:1	front	0.057	1.449	0.083	
1732.40	1412	UMTS 1750	RMC	Aluminum	Metal Loop	24.5	23.43	0.08	10 mm	FH7TT007J768	1:1	front	0.379	1.279	0.485	
1732.40	1412	UMTS 1750	RMC	Aluminum	Metal Links	24.5	23.43	-0.01	10 mm	FH7TT007J768	1:1	front	0.371	1.279	0.475	
1732.40	1412	UMTS 1750	RMC	Aluminum	Sport	24.5	23.43	-0.01	10 mm	FH7TT007J768	1:1	front	0.186	1.279	0.238	
1712.40	1312	UMTS 1750	RMC	Stainless Steel	Metal Loop	24.5	23.41	0.21	10 mm	FH7TT00GJ776	1:1	front	0.376	1.285	0.483	
1732.40	1412	UMTS 1750	RMC	Stainless Steel	Metal Loop	24.5	23.43	0.00	10 mm	FH7TT00GJ776	1:1	front	0.411	1.279	0.526	A2
1752.60	1513	UMTS 1750	RMC	Stainless Steel	Metal Loop	24.5	23.57	0.09	10 mm	FH7TT00GJ776	1:1	front	0.294	1.239	0.364	
1732.40	1412	UMTS 1750	RMC	Stainless Steel	Metal Links	24.5	23.43	0.05	10 mm	FH7TT00GJ776	1:1	front	0.405	1.279	0.518	
1732.40	1412	UMTS 1750	RMC	Stainless Steel	Sport	24.5	23.43	-0.03	10 mm	FH7TT00GJ776	1:1	front	0.184	1.279	0.235	
1732.40	1412	UMTS 1750	RMC	Ceramic	Metal Loop	24.5	23.43	-0.02	10 mm	FH7TT00AJ77R	1:1	front	0.330	1.279	0.422	
1732.40	1412	UMTS 1750	RMC	Ceramic	Metal Links	24.5	23.43	0.03	10 mm	FH7TT00AJ77R	1:1	front	0.329	1.279	0.421	
1732.40	1412	UMTS 1750	RMC	Ceramic	Sport	24.5	23.43	0.00	10 mm	FH7TT00AJ77R	1:1	front	0.159	1.279	0.203	
1880.00	9400	UMTS 1900	RMC	Aluminum	Metal Loop	24.5	23.16	0.05	10 mm	FH7TT00GJ768	1:1	front	0.372	1.361	0.506	
1880.00	9400	UMTS 1900	RMC	Aluminum	Metal Links	24.5	23.16	0.08	10 mm	FH7TT00GJ768	1:1	front	0.334	1.361	0.455	
1880.00	9400	UMTS 1900	RMC	Aluminum	Sport	24.5	23.16	-0.18	10 mm	FH7TT00GJ768	1:1	front	0.181	1.361	0.246	
1880.00	9400	UMTS 1900	RMC	Stainless Steel	Metal Loop	24.5	23.16	-0.09	10 mm	FH7TT008J77H	1:1	front	0.263	1.361	0.358	
1880.00	9400	UMTS 1900	RMC	Stainless Steel	Metal Links	24.5	23.16	0.03	10 mm	FH7TT008J77H	1:1	front	0.246	1.361	0.335	
1880.00	9400	UMTS 1900	RMC	Stainless Steel	Sport	24.5	23.16	-0.10	10 mm	FH7TT008J77H	1:1	front	0.136	1.361	0.185	
1880.00	9400	UMTS 1900	RMC	Ceramic	Metal Loop	24.5	23.16	-0.01	10 mm	FH7TT00AJ77R	1:1	front	0.375	1.361	0.510	A3
1880.00	9400	UMTS 1900	RMC	Ceramic	Metal Links	24.5	23.16	0.02	10 mm	FH7TT00HJ77R	1:1	front	0.290	1.361	0.395	
1880.00	9400	UMTS 1900	RMC	Ceramic	Sport	24.5	23.16	0.08	10 mm	FH7TT00AJ77R	1:1	front	0.207	1.361	0.282	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram				

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT				Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch				Page 38 of 61

Table 10-2
LTE Band 12 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)			
707.50	23095	Md	LTE Band 12	10	Aluminum	Metal Loop	24.0	22.39	0.04	0	FH7TT007J768	QPSK	1	25	10 mm	front	1:1	0.048	1.449	0.070
707.50	23095	Md	LTE Band 12	10	Aluminum	Metal Loop	23.0	21.56	0.10	1	FH7TT007J768	QPSK	25	25	10 mm	front	1:1	0.039	1.393	0.054
707.50	23095	Md	LTE Band 12	10	Aluminum	Metal Links	24.0	22.39	0.10	0	FH7TT007J768	QPSK	1	25	10 mm	front	1:1	0.047	1.449	0.068
707.50	23095	Md	LTE Band 12	10	Aluminum	Metal Links	23.0	21.56	0.01	1	FH7TT007J768	QPSK	25	25	10 mm	front	1:1	0.039	1.393	0.054
707.50	23095	Md	LTE Band 12	10	Aluminum	Sport	24.0	22.39	0.10	0	FH7TT00CJ768	QPSK	1	25	10 mm	front	1:1	0.041	1.449	0.059
707.50	23095	Md	LTE Band 12	10	Aluminum	Sport	23.0	21.56	0.10	1	FH7TT00CJ768	QPSK	25	25	10 mm	front	1:1	0.034	1.393	0.047
707.50	23095	Md	LTE Band 12	10	Stainless Steel	Metal Loop	24.0	22.39	0.03	0	FH7TT00GJ776	QPSK	1	25	10 mm	front	1:1	0.043	1.449	0.062
707.50	23095	Md	LTE Band 12	10	Stainless Steel	Metal Loop	23.0	21.56	0.08	1	FH7TT00GJ776	QPSK	25	25	10 mm	front	1:1	0.036	1.393	0.050
707.50	23095	Md	LTE Band 12	10	Stainless Steel	Metal Links	24.0	22.39	0.01	0	FH7TT005J77H	QPSK	1	25	10 mm	front	1:1	0.057	1.449	0.083
707.50	23095	Md	LTE Band 12	10	Stainless Steel	Metal Links	23.0	21.56	0.12	1	FH7TT005J77H	QPSK	25	25	10 mm	front	1:1	0.045	1.393	0.063
707.50	23095	Md	LTE Band 12	10	Stainless Steel	Sport	24.0	22.39	0.03	0	FH7TT008J77H	QPSK	1	25	10 mm	front	1:1	0.048	1.449	0.070
707.50	23095	Md	LTE Band 12	10	Stainless Steel	Sport	23.0	21.56	0.07	1	FH7TT008J77H	QPSK	25	25	10 mm	front	1:1	0.038	1.393	0.053
707.50	23095	Md	LTE Band 12	10	Ceramic	Metal Loop	24.0	22.39	0.04	0	FH7TT00GJ77R	QPSK	1	25	10 mm	front	1:1	0.042	1.449	0.061
707.50	23095	Md	LTE Band 12	10	Ceramic	Metal Loop	23.0	21.56	0.08	1	FH7TT00GJ77R	QPSK	25	25	10 mm	front	1:1	0.034	1.393	0.047
707.50	23095	Md	LTE Band 12	10	Ceramic	Metal Links	24.0	22.39	0.09	0	FH7TT008J77R	QPSK	1	25	10 mm	front	1:1	0.048	1.449	0.070
707.50	23095	Md	LTE Band 12	10	Ceramic	Metal Links	23.0	21.56	0.06	1	FH7TT008J77R	QPSK	25	25	10 mm	front	1:1	0.040	1.393	0.056
707.50	23095	Md	LTE Band 12	10	Ceramic	Sport	24.0	22.39	0.08	0	FH7TT00GJ77R	QPSK	1	25	10 mm	front	1:1	0.039	1.449	0.057
707.50	23095	Md	LTE Band 12	10	Ceramic	Sport	23.0	21.56	0.14	1	FH7TT00GJ77R	QPSK	25	25	10 mm	front	1:1	0.032	1.393	0.045
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-3
LTE Band 13 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)			
782.00	23230	Md	LTE Band 13	10	Aluminum	Metal Loop	24.0	22.37	0.02	0	FH7TT00DJ768	QPSK	1	25	10 mm	front	1:1	0.062	1.455	0.090
782.00	23230	Md	LTE Band 13	10	Aluminum	Metal Loop	23.0	21.33	0.08	1	FH7TT00DJ768	QPSK	25	12	10 mm	front	1:1	0.051	1.469	0.075
782.00	23230	Md	LTE Band 13	10	Aluminum	Metal Links	24.0	22.37	0.16	0	FH7TT00CJ768	QPSK	1	25	10 mm	front	1:1	0.072	1.455	0.105
782.00	23230	Md	LTE Band 13	10	Aluminum	Metal Links	23.0	21.33	0.11	1	FH7TT00CJ768	QPSK	25	12	10 mm	front	1:1	0.057	1.469	0.084
782.00	23230	Md	LTE Band 13	10	Aluminum	Sport	24.0	22.37	0.05	0	FH7TT00GJ768	QPSK	1	25	10 mm	front	1:1	0.058	1.455	0.084
782.00	23230	Md	LTE Band 13	10	Aluminum	Sport	23.0	21.33	-0.04	1	FH7TT00GJ768	QPSK	25	12	10 mm	front	1:1	0.049	1.469	0.072
782.00	23230	Md	LTE Band 13	10	Stainless Steel	Metal Loop	24.0	22.37	-0.02	0	FH7TT008J77H	QPSK	1	25	10 mm	front	1:1	0.062	1.455	0.090
782.00	23230	Md	LTE Band 13	10	Stainless Steel	Metal Loop	23.0	21.33	0.06	1	FH7TT008J77H	QPSK	25	12	10 mm	front	1:1	0.049	1.469	0.072
782.00	23230	Md	LTE Band 13	10	Stainless Steel	Metal Links	24.0	22.37	0.06	0	FH7TT005J77H	QPSK	1	25	10 mm	front	1:1	0.080	1.455	0.116
782.00	23230	Md	LTE Band 13	10	Stainless Steel	Metal Links	23.0	21.33	0.01	1	FH7TT005J77H	QPSK	25	12	10 mm	front	1:1	0.051	1.469	0.075
782.00	23230	Md	LTE Band 13	10	Stainless Steel	Sport	24.0	22.37	0.01	0	FH7TT00AJ77H	QPSK	1	25	10 mm	front	1:1	0.056	1.455	0.081
782.00	23230	Md	LTE Band 13	10	Stainless Steel	Sport	23.0	21.33	0.09	1	FH7TT00AJ77H	QPSK	25	12	10 mm	front	1:1	0.044	1.469	0.065
782.00	23230	Md	LTE Band 13	10	Ceramic	Metal Loop	24.0	22.37	0.02	0	FH7TT00HJ77R	QPSK	1	25	10 mm	front	1:1	0.047	1.455	0.068
782.00	23230	Md	LTE Band 13	10	Ceramic	Metal Loop	23.0	21.33	-0.14	1	FH7TT00HJ77R	QPSK	25	12	10 mm	front	1:1	0.038	1.469	0.056
782.00	23230	Md	LTE Band 13	10	Ceramic	Metal Links	24.0	22.37	0.01	0	FH7TT00GJ77R	QPSK	1	25	10 mm	front	1:1	0.053	1.455	0.077
782.00	23230	Md	LTE Band 13	10	Ceramic	Metal Links	23.0	21.33	0.03	1	FH7TT00GJ77R	QPSK	25	12	10 mm	front	1:1	0.042	1.469	0.062
782.00	23230	Md	LTE Band 13	10	Ceramic	Sport	24.0	22.37	0.03	0	FH7TT00AJ77R	QPSK	1	25	10 mm	front	1:1	0.045	1.455	0.065
782.00	23230	Md	LTE Band 13	10	Ceramic	Sport	23.0	21.33	0.09	1	FH7TT00AJ77R	QPSK	25	12	10 mm	front	1:1	0.037	1.469	0.054
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-4
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)	(W/kg)	(W/kg)	
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Loop	24.0	22.80	0.10	0	FH7TT00CJ768	QPSK	1	49	10 mm	front	1:1	0.069	1.318	0.091
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Loop	23.0	21.81	0.11	1	FH7TT00CJ768	QPSK	25	25	10 mm	front	1:1	0.056	1.315	0.074
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Links	24.0	22.80	0.07	0	FH7TT00GJ768	QPSK	1	49	10 mm	front	1:1	0.076	1.318	0.100
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Links	23.0	21.81	0.09	1	FH7TT00GJ768	QPSK	25	25	10 mm	front	1:1	0.061	1.315	0.080
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Sport	24.0	22.80	0.11	0	FH7TT00TJ768	QPSK	1	49	10 mm	front	1:1	0.066	1.318	0.087
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Sport	23.0	21.81	-0.05	1	FH7TT00TJ768	QPSK	25	25	10 mm	front	1:1	0.054	1.315	0.071
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Loop	24.0	22.80	0.03	0	FH7TT005J77H	QPSK	1	49	10 mm	front	1:1	0.070	1.318	0.092
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Loop	23.0	21.81	0.09	1	FH7TT005J77H	QPSK	25	25	10 mm	front	1:1	0.056	1.315	0.074
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Links	24.0	22.80	0.04	0	FH7TT00AJ77H	QPSK	1	49	10 mm	front	1:1	0.083	1.318	0.109
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Links	23.0	21.81	0.06	1	FH7TT00AJ77H	QPSK	25	25	10 mm	front	1:1	0.059	1.315	0.078
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Sport	24.0	22.80	0.01	0	FH7TT008J77H	QPSK	1	49	10 mm	front	1:1	0.072	1.318	0.095
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Sport	23.0	21.81	0.15	1	FH7TT008J77H	QPSK	25	25	10 mm	front	1:1	0.058	1.315	0.076
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Loop	24.0	22.80	0.03	0	FH7TT008J77R	QPSK	1	49	10 mm	front	1:1	0.053	1.318	0.070
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Loop	23.0	21.81	-0.10	1	FH7TT008J77R	QPSK	25	25	10 mm	front	1:1	0.042	1.315	0.055
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Links	24.0	22.80	0.13	0	FH7TT00HJ77R	QPSK	1	49	10 mm	front	1:1	0.049	1.318	0.065
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Links	23.0	21.81	0.11	1	FH7TT00HJ77R	QPSK	25	25	10 mm	front	1:1	0.039	1.315	0.051
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Sport	24.0	22.80	0.00	0	FH7TT00AJ77R	QPSK	1	49	10 mm	front	1:1	0.050	1.318	0.066
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Sport	23.0	21.81	-0.08	1	FH7TT00AJ77R	QPSK	25	25	10 mm	front	1:1	0.040	1.315	0.053
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head 1.6 W/kg (mW/g) averaged over 1 gram										
Spatial Peak																				
Uncontrolled Exposure/General Population																				

Table 10-5
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)	(W/kg)	(W/kg)	
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Loop	24.0	22.58	-0.04	0	FH7TT00DJ768	QPSK	1	25	10 mm	front	1:1	0.068	1.387	0.094
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Loop	23.0	21.55	-0.02	1	FH7TT00DJ768	QPSK	25	12	10 mm	front	1:1	0.055	1.396	0.077
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Links	24.0	22.58	-0.02	0	FH7TT00CJ768	QPSK	1	25	10 mm	front	1:1	0.075	1.387	0.104
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Links	23.0	21.55	-0.03	1	FH7TT00CJ768	QPSK	25	12	10 mm	front	1:1	0.060	1.396	0.084
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Sport	24.0	22.58	-0.05	0	FH7TT00GJ768	QPSK	1	25	10 mm	front	1:1	0.066	1.387	0.092
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Sport	23.0	21.55	-0.03	1	FH7TT00GJ768	QPSK	25	12	10 mm	front	1:1	0.053	1.396	0.074
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Loop	24.0	22.58	-0.06	0	FH7TT008J77H	QPSK	1	25	10 mm	front	1:1	0.069	1.387	0.096
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Loop	23.0	21.55	0.01	1	FH7TT008J77H	QPSK	25	12	10 mm	front	1:1	0.055	1.396	0.077
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Links	24.0	22.58	-0.03	0	FH7TT00AJ77H	QPSK	1	25	10 mm	front	1:1	0.073	1.387	0.101
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Links	23.0	21.55	-0.03	1	FH7TT00AJ77H	QPSK	25	12	10 mm	front	1:1	0.058	1.396	0.081
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Sport	24.0	22.58	-0.14	0	FH7TT00GJ776	QPSK	1	25	10 mm	front	1:1	0.071	1.387	0.098
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Sport	23.0	21.55	-0.04	1	FH7TT00GJ776	QPSK	25	12	10 mm	front	1:1	0.057	1.396	0.080
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Loop	24.0	22.58	-0.10	0	FH7TT00AJ77R	QPSK	1	25	10 mm	front	1:1	0.052	1.387	0.072
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Loop	23.0	21.55	-0.02	1	FH7TT00AJ77R	QPSK	25	12	10 mm	front	1:1	0.041	1.396	0.057
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Links	24.0	22.58	-0.01	0	FH7TT00HJ77R	QPSK	1	25	10 mm	front	1:1	0.048	1.387	0.067
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Links	23.0	21.55	0.02	1	FH7TT00HJ77R	QPSK	25	12	10 mm	front	1:1	0.039	1.396	0.054
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Sport	24.0	22.58	-0.04	0	FH7TT00GJ77R	QPSK	1	25	10 mm	front	1:1	0.049	1.387	0.068
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Sport	23.0	21.55	0.00	1	FH7TT00GJ77R	QPSK	25	12	10 mm	front	1:1	0.039	1.396	0.054
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head 1.6 W/kg (mW/g) averaged over 1 gram										
Spatial Peak																				
Uncontrolled Exposure/General Population																				

Table 10-6
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor (1g)	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)				
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Loop	24.0	23.36	0.02	0	FH7TT00CJ768	QPSK	1	99	10 mm	front	1:1	0.307	1.159	0.356	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Loop	23.0	21.87	0.01	1	FH7TT00CJ768	QPSK	50	50	10 mm	front	1:1	0.234	1.297	0.303	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Links	24.0	23.36	-0.09	0	FH7TT00GJ768	QPSK	1	99	10 mm	front	1:1	0.321	1.159	0.372	A8
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Links	23.0	21.87	0.01	1	FH7TT00GJ768	QPSK	50	50	10 mm	front	1:1	0.236	1.297	0.306	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Sport	24.0	23.36	0.00	0	FH7TT00CJ768	QPSK	1	99	10 mm	front	1:1	0.154	1.159	0.178	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Sport	23.0	21.87	-0.01	1	FH7TT00CJ768	QPSK	50	50	10 mm	front	1:1	0.117	1.297	0.152	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Loop	24.0	23.36	0.07	0	FH7TT008J77H	QPSK	1	99	10 mm	front	1:1	0.226	1.159	0.262	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Loop	23.0	21.87	0.04	1	FH7TT008J77H	QPSK	50	50	10 mm	front	1:1	0.166	1.297	0.215	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Links	24.0	23.36	0.00	0	FH7TT00AJ77H	QPSK	1	99	10 mm	front	1:1	0.236	1.159	0.274	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Links	23.0	21.87	0.00	1	FH7TT00AJ77H	QPSK	50	50	10 mm	front	1:1	0.179	1.297	0.232	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Sport	24.0	23.36	-0.19	0	FH7TT00GJ776	QPSK	1	99	10 mm	front	1:1	0.141	1.159	0.163	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Sport	23.0	21.87	0.00	1	FH7TT00GJ776	QPSK	50	50	10 mm	front	1:1	0.107	1.297	0.139	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Loop	24.0	23.36	-0.02	0	FH7TT008J77R	QPSK	1	99	10 mm	front	1:1	0.298	1.159	0.345	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Loop	23.0	21.87	0.02	1	FH7TT008J77R	QPSK	50	50	10 mm	front	1:1	0.221	1.297	0.287	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Links	24.0	23.36	0.04	0	FH7TT008J77R	QPSK	1	99	10 mm	front	1:1	0.285	1.159	0.330	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Links	23.0	21.87	-0.02	1	FH7TT008J77R	QPSK	50	50	10 mm	front	1:1	0.210	1.297	0.272	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Sport	24.0	23.36	0.01	0	FH7TT00GJ77R	QPSK	1	99	10 mm	front	1:1	0.125	1.159	0.145	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Sport	23.0	21.87	-0.03	1	FH7TT00GJ77R	QPSK	50	50	10 mm	front	1:1	0.092	1.297	0.119	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-7
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor (1g)	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)				
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Loop	24.0	23.04	-0.06	0	FH7TT00DJ768	QPSK	1	99	10 mm	front	1:1	0.242	1.247	0.302	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Loop	23.0	21.90	0.01	1	FH7TT00DJ768	QPSK	50	0	10 mm	front	1:1	0.171	1.288	0.220	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Links	24.0	23.04	-0.07	0	FH7TT00GJ768	QPSK	1	99	10 mm	front	1:1	0.265	1.247	0.330	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Links	23.0	21.90	-0.01	1	FH7TT00GJ768	QPSK	50	0	10 mm	front	1:1	0.196	1.288	0.252	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Sport	24.0	23.04	0.14	0	FH7TT00CJ768	QPSK	1	99	10 mm	front	1:1	0.137	1.247	0.171	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Sport	23.0	21.90	-0.04	1	FH7TT00CJ768	QPSK	50	0	10 mm	front	1:1	0.097	1.288	0.125	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Loop	24.0	23.04	-0.03	0	FH7TT005J77H	QPSK	1	99	10 mm	front	1:1	0.206	1.247	0.257	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Loop	23.0	21.90	-0.04	1	FH7TT005J77H	QPSK	50	0	10 mm	front	1:1	0.164	1.288	0.211	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Links	24.0	23.04	0.01	0	FH7TT00AJ77H	QPSK	1	99	10 mm	front	1:1	0.165	1.247	0.206	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Links	23.0	21.90	-0.04	1	FH7TT00AJ77H	QPSK	50	0	10 mm	front	1:1	0.131	1.288	0.169	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Sport	24.0	23.04	-0.08	0	FH7TT005J77H	QPSK	1	99	10 mm	front	1:1	0.095	1.247	0.118	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Sport	23.0	21.90	0.00	1	FH7TT005J77H	QPSK	50	0	10 mm	front	1:1	0.070	1.288	0.090	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Loop	24.0	23.04	-0.02	0	FH7TT00GJ77R	QPSK	1	99	10 mm	front	1:1	0.292	1.247	0.364	A8
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Loop	23.0	21.90	0.03	1	FH7TT00GJ77R	QPSK	50	0	10 mm	front	1:1	0.215	1.288	0.277	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Links	24.0	23.04	0.03	0	FH7TT008J77R	QPSK	1	99	10 mm	front	1:1	0.255	1.247	0.318	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Links	23.0	21.90	-0.01	1	FH7TT008J77R	QPSK	50	0	10 mm	front	1:1	0.192	1.288	0.247	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Sport	24.0	23.04	0.04	0	FH7TT00HJ77R	QPSK	1	99	10 mm	front	1:1	0.138	1.247	0.172	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Sport	23.0	21.90	0.00	1	FH7TT00HJ77R	QPSK	50	0	10 mm	front	1:1	0.099	1.288	0.128	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-8
LTE Band 41 Head SAR

MEASUREMENT RESULTS																			Plot #		
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor (1g)	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)	(W/kg)			
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Loop	24.0	23.41	-0.03	0	FH7TT00CJ768	QPSK	1	99	10 mm	front	1:1.58	0.103	1.146	0.118	
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Loop	23.0	22.07	0.06	1	FH7TT00CJ768	QPSK	50	50	10 mm	front	1:1.58	0.077	1.239	0.095	
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Links	24.0	23.41	-0.02	0	FH7TT007J768	QPSK	1	99	10 mm	front	1:1.58	0.099	1.146	0.113	
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Links	23.0	22.07	0.14	1	FH7TT007J768	QPSK	50	50	10 mm	front	1:1.58	0.073	1.239	0.090	
2506.00	39750	Low	LTE Band 41	20	Aluminum	Sport	24.0	23.41	-0.10	0	FH7TT00CJ768	QPSK	1	99	10 mm	front	1:1.58	0.110	1.146	0.126	A10
2506.00	39750	Low	LTE Band 41	20	Aluminum	Sport	23.0	22.07	-0.09	1	FH7TT00CJ768	QPSK	50	50	10 mm	front	1:1.58	0.083	1.239	0.103	
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Loop	24.0	23.41	0.06	0	FH7TT00AJ77H	QPSK	1	99	10 mm	front	1:1.58	0.083	1.146	0.095	
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Loop	23.0	22.07	-0.01	1	FH7TT00AJ77H	QPSK	50	50	10 mm	front	1:1.58	0.062	1.239	0.077	
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Links	24.0	23.41	0.02	0	FH7TT00AJ77H	QPSK	1	99	10 mm	front	1:1.58	0.080	1.146	0.092	
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Links	23.0	22.07	0.10	1	FH7TT00AJ77H	QPSK	50	50	10 mm	front	1:1.58	0.061	1.239	0.076	
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Sport	24.0	23.41	-0.02	0	FH7TT00AJ77H	QPSK	1	99	10 mm	front	1:1.58	0.101	1.146	0.116	
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Sport	23.0	22.07	0.02	1	FH7TT00AJ77H	QPSK	50	50	10 mm	front	1:1.58	0.077	1.239	0.095	
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Loop	24.0	23.41	0.12	0	FH7TT008J77R	QPSK	1	99	10 mm	front	1:1.58	0.077	1.146	0.088	
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Loop	23.0	22.07	-0.01	1	FH7TT008J77R	QPSK	50	50	10 mm	front	1:1.58	0.056	1.239	0.069	
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Links	24.0	23.41	-0.09	0	FH7TT008J77R	QPSK	1	99	10 mm	front	1:1.58	0.083	1.146	0.095	
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Links	23.0	22.07	0.13	1	FH7TT008J77R	QPSK	50	50	10 mm	front	1:1.58	0.060	1.239	0.074	
2506.00	39750	Low	LTE Band 41	20	Ceramic	Sport	24.0	23.41	-0.02	0	FH7TT008J77R	QPSK	1	99	10 mm	front	1:1.58	0.104	1.146	0.119	
2506.00	39750	Low	LTE Band 41	20	Ceramic	Sport	23.0	22.07	0.03	1	FH7TT008J77R	QPSK	50	50	10 mm	front	1:1.58	0.080	1.239	0.099	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-9
WLAN Head SAR

MEASUREMENT RESULTS																			Plot #	
FREQUENCY		Mode	Service	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	(W/kg)	
MHz	Ch.																			
2437	6	802.11b	DSSS	22	Aluminum	Metal Loop	19.5	19.47	-0.12	10 mm	FH7TT007J768	1	front	98.2	0.062	1.007	1.018	0.064		
2437	6	802.11b	DSSS	22	Aluminum	Metal Links	19.5	19.47	-0.16	10 mm	FH7TT007J768	1	front	98.2	0.060	1.007	1.018	0.062		
2437	6	802.11b	DSSS	22	Aluminum	Sport	19.5	19.47	-0.08	10 mm	FH7TT007J768	1	front	98.2	0.087	1.007	1.018	0.089	A11	
2437	6	802.11b	DSSS	22	Stainless Steel	Metal Loop	19.5	19.47	0.01	10 mm	FH7TT005J77H	1	front	98.2	0.048	1.007	1.018	0.049		
2437	6	802.11b	DSSS	22	Stainless Steel	Metal Links	19.5	19.47	-0.08	10 mm	FH7TT005J77H	1	front	98.2	0.049	1.007	1.018	0.050		
2437	6	802.11b	DSSS	22	Stainless Steel	Sport	19.5	19.47	-0.17	10 mm	FH7TT005J77H	1	front	98.2	0.074	1.007	1.018	0.076		
2437	6	802.11b	DSSS	22	Ceramic	Metal Loop	19.5	19.47	0.00	10 mm	FH7TT00HJ77R	1	front	98.2	0.043	1.007	1.018	0.044		
2437	6	802.11b	DSSS	22	Ceramic	Metal Links	19.5	19.47	-0.14	10 mm	FH7TT00HJ77R	1	front	98.2	0.045	1.007	1.018	0.046		
2437	6	802.11b	DSSS	22	Ceramic	Sport	19.5	19.47	0.20	10 mm	FH7TT00HJ77R	1	front	98.2	0.068	1.007	1.018	0.070		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 42 of 61

Table 10-10
Bluetooth (ePA) Head SAR

MEASUREMENT RESULTS																	Plot #
FREQUENCY		Mode	Service	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	
MHz	Ch.													(W/kg)			
2441	39	Bluetooth	FHSS	Aluminum	Metal Loop	19.0	18.95	-0.04	10 mm	FH7TT007J768	1	front	1:1	0.071	1.012	0.072	
2441	39	Bluetooth	FHSS	Aluminum	Metal Links	19.0	18.95	-0.03	10 mm	FH7TT007J768	1	front	1:1	0.066	1.012	0.067	
2441	39	Bluetooth	FHSS	Aluminum	Sport	19.0	18.95	-0.18	10 mm	FH7TT007J768	1	front	1:1	0.093	1.012	0.094	A12
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Loop	19.0	18.95	-0.13	10 mm	FH7TT008J77H	1	front	1:1	0.051	1.012	0.052	
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Links	19.0	18.95	-0.09	10 mm	FH7TT008J77H	1	front	1:1	0.052	1.012	0.053	
2441	39	Bluetooth	FHSS	Stainless Steel	Sport	19.0	18.95	-0.03	10 mm	FH7TT008J77H	1	front	1:1	0.075	1.012	0.076	
2441	39	Bluetooth	FHSS	Ceramic	Metal Loop	19.0	18.95	0.01	10 mm	FH7TT00GJ77R	1	front	1:1	0.036	1.012	0.036	
2441	39	Bluetooth	FHSS	Ceramic	Metal Links	19.0	18.95	-0.14	10 mm	FH7TT00GJ77R	1	front	1:1	0.041	1.012	0.041	
2441	39	Bluetooth	FHSS	Ceramic	Sport	19.0	18.95	-0.03	10 mm	FH7TT00GJ77R	1	front	1:1	0.062	1.012	0.063	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-11
Bluetooth (iPA) Head SAR

MEASUREMENT RESULTS																	Plot #
FREQUENCY		Mode	Service	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	
MHz	Ch.													(W/kg)			
2441	39	Bluetooth	FHSS	Aluminum	Metal Loop	13.0	12.98	0.10	10 mm	FH7TT00DJ768	1	front	1:1	0.017	1.005	0.017	
2441	39	Bluetooth	FHSS	Aluminum	Metal Links	13.0	12.98	0.12	10 mm	FH7TT00DJ768	1	front	1:1	0.013	1.005	0.013	
2441	39	Bluetooth	FHSS	Aluminum	Sport	13.0	12.98	-0.21	10 mm	FH7TT00DJ768	1	front	1:1	0.021	1.005	0.021	
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Loop	13.0	12.98	-0.16	10 mm	FH7TT00AJ77H	1	front	1:1	0.017	1.005	0.017	
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Links	13.0	12.98	0.16	10 mm	FH7TT00AJ77H	1	front	1:1	0.015	1.005	0.015	
2441	39	Bluetooth	FHSS	Stainless Steel	Sport	13.0	12.98	0.03	10 mm	FH7TT00AJ77H	1	front	1:1	0.021	1.005	0.021	
2441	39	Bluetooth	FHSS	Ceramic	Metal Loop	13.0	12.98	0.14	10 mm	FH7TT00HJ77R	1	front	1:1	0.014	1.005	0.014	
2441	39	Bluetooth	FHSS	Ceramic	Metal Links	13.0	12.98	0.13	10 mm	FH7TT00HJ77R	1	front	1:1	0.014	1.005	0.014	
2441	39	Bluetooth	FHSS	Ceramic	Sport	13.0	12.98	-0.07	10 mm	FH7TT00HJ77R	1	front	1:1	0.022	1.005	0.022	A13
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 43 of 61

10.2 Standalone Extremity SAR Data

Table 10-12
UMTS Extremity SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	Aluminum	Metal Loop	24.5	22.89	0.18	0 mm	FH7TT007J768	1:1	back	0.013	1.449	0.019	
836.60	4183	UMTS 850	RMC	Aluminum	Metal Links	24.5	22.89	0.13	0 mm	FH7TT007J768	1:1	back	0.003	1.449	0.004	
836.60	4183	UMTS 850	RMC	Aluminum	Sport	24.5	22.89	0.19	0 mm	FH7TT00GJ768	1:1	back	0.014	1.449	0.020	
836.60	4183	UMTS 850	RMC	Stainless Steel	Metal Loop	24.5	22.89	0.19	0 mm	FH7TT008J77H	1:1	back	0.011	1.449	0.016	
836.60	4183	UMTS 850	RMC	Stainless Steel	Metal Links	24.5	22.89	0.15	0 mm	FH7TT008J77H	1:1	back	0.004	1.449	0.006	
836.60	4183	UMTS 850	RMC	Stainless Steel	Sport	24.5	22.89	0.19	0 mm	FH7TT00AJ77H	1:1	back	0.011	1.449	0.016	
836.60	4183	UMTS 850	RMC	Ceramic	Metal Loop	24.5	22.89	-0.04	0 mm	FH7TT00HJ77R	1:1	back	0.017	1.449	0.025	
836.60	4183	UMTS 850	RMC	Ceramic	Metal Links	24.5	22.89	0.19	0 mm	FH7TT00HJ77R	1:1	back	0.010	1.449	0.014	
836.60	4183	UMTS 850	RMC	Ceramic	Sport	24.5	22.89	0.09	0 mm	FH7TT00HJ77R	1:1	back	0.018	1.449	0.026	A14
1732.40	1412	UMTS 1750	RMC	Aluminum	Metal Loop	24.5	23.43	0.01	0 mm	FH7TT00DJ768	1:1	back	0.080	1.279	0.102	
1732.40	1412	UMTS 1750	RMC	Aluminum	Metal Links	24.5	23.43	-0.05	0 mm	FH7TT00DJ768	1:1	back	0.052	1.279	0.067	
1732.40	1412	UMTS 1750	RMC	Aluminum	Sport	24.5	23.43	0.16	0 mm	FH7TT00GJ768	1:1	back	0.061	1.279	0.078	
1732.40	1412	UMTS 1750	RMC	Stainless Steel	Metal Loop	24.5	23.43	0.15	0 mm	FH7TT00GJ776	1:1	back	0.124	1.279	0.159	
1732.40	1412	UMTS 1750	RMC	Stainless Steel	Metal Links	24.5	23.43	0.06	0 mm	FH7TT00AJ77H	1:1	back	0.052	1.279	0.067	
1732.40	1412	UMTS 1750	RMC	Stainless Steel	Sport	24.5	23.43	-0.01	0 mm	FH7TT00GJ776	1:1	back	0.074	1.279	0.095	
1712.40	1312	UMTS 1750	RMC	Ceramic	Metal Loop	24.5	23.41	-0.05	0 mm	FH7TT00GJ77R	1:1	back	0.124	1.285	0.159	
1732.40	1412	UMTS 1750	RMC	Ceramic	Metal Loop	24.5	23.43	-0.12	0 mm	FH7TT00GJ77R	1:1	back	0.140	1.279	0.179	A15
1752.60	1513	UMTS 1750	RMC	Ceramic	Metal Loop	24.5	23.57	0.04	0 mm	FH7TT00GJ77R	1:1	back	0.112	1.239	0.139	
1732.40	1412	UMTS 1750	RMC	Ceramic	Metal Links	24.5	23.43	-0.04	0 mm	FH7TT00GJ77R	1:1	back	0.076	1.279	0.097	
1732.40	1412	UMTS 1750	RMC	Ceramic	Sport	24.5	23.43	0.02	0 mm	FH7TT00GJ77R	1:1	back	0.089	1.279	0.114	
1880.00	9400	UMTS 1900	RMC	Aluminum	Metal Loop	24.5	23.16	-0.03	0 mm	FH7TT00GJ768	1:1	back	0.051	1.361	0.069	
1880.00	9400	UMTS 1900	RMC	Aluminum	Metal Links	24.5	23.16	0.00	0 mm	FH7TT007J768	1:1	back	0.061	1.361	0.083	
1880.00	9400	UMTS 1900	RMC	Aluminum	Sport	24.5	23.16	0.10	0 mm	FH7TT00GJ768	1:1	back	0.088	1.361	0.120	
1880.00	9400	UMTS 1900	RMC	Stainless Steel	Metal Loop	24.5	23.16	0.03	0 mm	FH7TT005J77H	1:1	back	0.046	1.361	0.063	
1880.00	9400	UMTS 1900	RMC	Stainless Steel	Metal Links	24.5	23.16	-0.19	0 mm	FH7TT005J77H	1:1	back	0.037	1.361	0.050	
1880.00	9400	UMTS 1900	RMC	Stainless Steel	Sport	24.5	23.16	-0.11	0 mm	FH7TT005J77H	1:1	back	0.061	1.361	0.083	
1880.00	9400	UMTS 1900	RMC	Ceramic	Metal Loop	24.5	23.16	-0.06	0 mm	FH7TT008J77R	1:1	back	0.124	1.361	0.169	A16
1880.00	9400	UMTS 1900	RMC	Ceramic	Metal Links	24.5	23.16	-0.04	0 mm	FH7TT00AJ77R	1:1	back	0.078	1.361	0.106	
1880.00	9400	UMTS 1900	RMC	Ceramic	Sport	24.5	23.16	0.09	0 mm	FH7TT008J77R	1:1	back	0.100	1.361	0.136	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Extremity 4.0 W/kg (mW/g) averaged over 10 grams				

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT				Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch				Page 44 of 61

Table 10-13
LTE Band 12 Extremity SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.																(W/kg)	(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Aluminum	Metal Loop	24.0	22.39	0.03	0	FH7TT00DJ768	QPSK	1	25	0 mm	back	1:1	0.006	1.449	0.009
707.50	23095	Mid	LTE Band 12	10	Aluminum	Metal Loop	23.0	21.56	0.10	1	FH7TT00DJ768	QPSK	25	25	0 mm	back	1:1	0.005	1.393	0.007
707.50	23095	Mid	LTE Band 12	10	Aluminum	Metal Links	24.0	22.39	0.18	0	FH7TT00CJ768	QPSK	1	25	0 mm	back	1:1	0.003	1.449	0.004
707.50	23095	Mid	LTE Band 12	10	Aluminum	Metal Links	23.0	21.56	0.14	1	FH7TT00CJ768	QPSK	25	25	0 mm	back	1:1	0.001	1.393	0.001
707.50	23095	Mid	LTE Band 12	10	Aluminum	Sport	24.0	22.39	0.04	0	FH7TT00CJ768	QPSK	1	25	0 mm	back	1:1	0.008	1.449	0.012
707.50	23095	Mid	LTE Band 12	10	Aluminum	Sport	23.0	21.56	0.10	1	FH7TT00CJ768	QPSK	25	25	0 mm	back	1:1	0.006	1.393	0.008
707.50	23095	Mid	LTE Band 12	10	Stainless Steel	Metal Loop	24.0	22.39	-0.13	0	FH7TT005J77H	QPSK	1	25	0 mm	back	1:1	0.007	1.449	0.010
707.50	23095	Mid	LTE Band 12	10	Stainless Steel	Metal Loop	23.0	21.56	0.20	1	FH7TT005J77H	QPSK	25	25	0 mm	back	1:1	0.005	1.393	0.007
707.50	23095	Mid	LTE Band 12	10	Stainless Steel	Metal Links	24.0	22.39	0.12	0	FH7TT00GJ776	QPSK	1	25	0 mm	back	1:1	0.002	1.449	0.003
707.50	23095	Mid	LTE Band 12	10	Stainless Steel	Metal Links	23.0	21.56	0.10	1	FH7TT00GJ776	QPSK	25	25	0 mm	back	1:1	0.001	1.393	0.001
707.50	23095	Mid	LTE Band 12	10	Stainless Steel	Sport	24.0	22.39	0.14	0	FH7TT005J77H	QPSK	1	25	0 mm	back	1:1	0.006	1.449	0.009
707.50	23095	Mid	LTE Band 12	10	Stainless Steel	Sport	23.0	21.56	0.11	1	FH7TT005J77H	QPSK	25	25	0 mm	back	1:1	0.005	1.393	0.007
707.50	23095	Mid	LTE Band 12	10	Ceramic	Metal Loop	24.0	22.39	0.19	0	FH7TT00AJ77R	QPSK	1	25	0 mm	back	1:1	0.013	1.449	0.019
707.50	23095	Mid	LTE Band 12	10	Ceramic	Metal Loop	23.0	21.56	0.19	1	FH7TT00AJ77R	QPSK	25	25	0 mm	back	1:1	0.010	1.393	0.014
707.50	23095	Mid	LTE Band 12	10	Ceramic	Metal Links	24.0	22.39	-0.08	0	FH7TT00HJ77R	QPSK	1	25	0 mm	back	1:1	0.006	1.449	0.009
707.50	23095	Mid	LTE Band 12	10	Ceramic	Metal Links	23.0	21.56	0.13	1	FH7TT00HJ77R	QPSK	25	25	0 mm	back	1:1	0.003	1.393	0.004
707.50	23095	Mid	LTE Band 12	10	Ceramic	Sport	24.0	22.39	-0.19	0	FH7TT00HJ77R	QPSK	1	25	0 mm	back	1:1	0.010	1.449	0.014
707.50	23095	Mid	LTE Band 12	10	Ceramic	Sport	23.0	21.56	-0.14	1	FH7TT00HJ77R	QPSK	25	25	0 mm	back	1:1	0.008	1.393	0.011
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-14
LTE Band 13 Extremity SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.																(W/kg)	(W/kg)		
782.00	23230	Mid	LTE Band 13	10	Aluminum	Metal Loop	24.0	22.37	0.19	0	FH7TT00GJ768	QPSK	1	25	0 mm	back	1:1	0.007	1.455	0.010
782.00	23230	Mid	LTE Band 13	10	Aluminum	Metal Loop	23.0	21.33	0.13	1	FH7TT00GJ768	QPSK	25	12	0 mm	back	1:1	0.005	1.469	0.007
782.00	23230	Mid	LTE Band 13	10	Aluminum	Metal Links	24.0	22.37	0.14	0	FH7TT00CJ768	QPSK	1	25	0 mm	back	1:1	0.004	1.455	0.006
782.00	23230	Mid	LTE Band 13	10	Aluminum	Metal Links	23.0	21.33	0.18	1	FH7TT00CJ768	QPSK	25	12	0 mm	back	1:1	0.003	1.469	0.004
782.00	23230	Mid	LTE Band 13	10	Aluminum	Sport	24.0	22.37	0.17	0	FH7TT00CJ768	QPSK	1	25	0 mm	back	1:1	0.012	1.455	0.017
782.00	23230	Mid	LTE Band 13	10	Aluminum	Sport	23.0	21.33	-0.10	1	FH7TT00CJ768	QPSK	25	12	0 mm	back	1:1	0.008	1.469	0.012
782.00	23230	Mid	LTE Band 13	10	Stainless Steel	Metal Loop	24.0	22.37	-0.17	0	FH7TT005J77H	QPSK	1	25	0 mm	back	1:1	0.011	1.455	0.016
782.00	23230	Mid	LTE Band 13	10	Stainless Steel	Metal Loop	23.0	21.33	0.12	1	FH7TT005J77H	QPSK	25	12	0 mm	back	1:1	0.007	1.469	0.010
782.00	23230	Mid	LTE Band 13	10	Stainless Steel	Metal Links	24.0	22.37	0.19	0	FH7TT005J77H	QPSK	1	25	0 mm	back	1:1	0.002	1.455	0.003
782.00	23230	Mid	LTE Band 13	10	Stainless Steel	Metal Links	23.0	21.33	0.11	1	FH7TT005J77H	QPSK	25	12	0 mm	back	1:1	0.002	1.469	0.003
782.00	23230	Mid	LTE Band 13	10	Stainless Steel	Sport	24.0	22.37	-0.10	0	FH7TT008J77H	QPSK	1	25	0 mm	back	1:1	0.011	1.455	0.016
782.00	23230	Mid	LTE Band 13	10	Stainless Steel	Sport	23.0	21.33	0.17	1	FH7TT008J77H	QPSK	25	12	0 mm	back	1:1	0.007	1.469	0.010
782.00	23230	Mid	LTE Band 13	10	Ceramic	Metal Loop	24.0	22.37	-0.03	0	FH7TT00AJ77R	QPSK	1	25	0 mm	back	1:1	0.015	1.455	0.022
782.00	23230	Mid	LTE Band 13	10	Ceramic	Metal Loop	23.0	21.33	0.13	1	FH7TT00AJ77R	QPSK	25	12	0 mm	back	1:1	0.012	1.469	0.018
782.00	23230	Mid	LTE Band 13	10	Ceramic	Metal Links	24.0	22.37	0.15	0	FH7TT00AJ77R	QPSK	1	25	0 mm	back	1:1	0.005	1.455	0.007
782.00	23230	Mid	LTE Band 13	10	Ceramic	Metal Links	23.0	21.33	0.15	1	FH7TT00AJ77R	QPSK	25	12	0 mm	back	1:1	0.004	1.469	0.006
782.00	23230	Mid	LTE Band 13	10	Ceramic	Sport	24.0	22.37	0.13	0	FH7TT00GJ77R	QPSK	1	25	0 mm	back	1:1	0.015	1.455	0.022
782.00	23230	Mid	LTE Band 13	10	Ceramic	Sport	23.0	21.33	0.00	1	FH7TT00GJ77R	QPSK	25	12	0 mm	back	1:1	0.013	1.469	0.019
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-15
LTE Band 26 (Cell) Extremity SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor (10g)	Reported SAR (10g)	Plot #
MHz	Ch.																(W/kg)			
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Loop	24.0	22.80	0.18	0	FH7TT00CJ768	QPSK	1	49	0 mm	back	1:1	0.007	1.318	0.009
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Loop	23.0	21.81	0.10	1	FH7TT00CJ768	QPSK	25	25	0 mm	back	1:1	0.006	1.315	0.008
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Links	24.0	22.80	0.19	0	FH7TT00CJ768	QPSK	1	49	0 mm	back	1:1	0.004	1.318	0.005
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Metal Links	23.0	21.81	0.17	1	FH7TT00CJ768	QPSK	25	25	0 mm	back	1:1	0.003	1.315	0.004
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Sport	24.0	22.80	0.18	0	FH7TT007J768	QPSK	1	49	0 mm	back	1:1	0.013	1.318	0.017
844.00	26990	High	LTE Band 26 (Cell)	10	Aluminum	Sport	23.0	21.81	0.15	1	FH7TT007J768	QPSK	25	25	0 mm	back	1:1	0.010	1.315	0.013
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Loop	24.0	22.80	0.17	0	FH7TT00AJ77H	QPSK	1	49	0 mm	back	1:1	0.009	1.318	0.012
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Loop	23.0	21.81	0.17	1	FH7TT00AJ77H	QPSK	25	25	0 mm	back	1:1	0.007	1.315	0.009
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Links	24.0	22.80	0.12	0	FH7TT00AJ77H	QPSK	1	49	0 mm	back	1:1	0.002	1.318	0.003
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Metal Links	23.0	21.81	0.13	1	FH7TT00AJ77H	QPSK	25	25	0 mm	back	1:1	0.001	1.315	0.001
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Sport	24.0	22.80	0.17	0	FH7TT008J77H	QPSK	1	49	0 mm	back	1:1	0.013	1.318	0.017
844.00	26990	High	LTE Band 26 (Cell)	10	Stainless Steel	Sport	23.0	21.81	0.19	1	FH7TT008J77H	QPSK	25	25	0 mm	back	1:1	0.010	1.315	0.013
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Loop	24.0	22.80	-0.06	0	FH7TT008J77R	QPSK	1	49	0 mm	back	1:1	0.018	1.318	0.024
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Loop	23.0	21.81	-0.15	1	FH7TT008J77R	QPSK	25	25	0 mm	back	1:1	0.015	1.315	0.020
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Links	24.0	22.80	0.04	0	FH7TT00GJ77R	QPSK	1	49	0 mm	back	1:1	0.008	1.318	0.011
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Metal Links	23.0	21.81	0.03	1	FH7TT00GJ77R	QPSK	25	25	0 mm	back	1:1	0.006	1.315	0.008
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Sport	24.0	22.80	0.18	0	FH7TT00HJ77R	QPSK	1	49	0 mm	back	1:1	0.015	1.318	0.020
844.00	26990	High	LTE Band 26 (Cell)	10	Ceramic	Sport	23.0	21.81	0.13	1	FH7TT00HJ77R	QPSK	25	25	0 mm	back	1:1	0.011	1.315	0.014
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-16
LTE Band 5 (Cell) Extremity SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor (10g)	Reported SAR (10g)	Plot #
MHz	Ch.																(W/kg)			
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Loop	24.0	22.58	0.10	0	FH7TT007J768	QPSK	1	25	0 mm	back	1:1	0.007	1.387	0.010
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Loop	23.0	21.55	0.19	1	FH7TT007J768	QPSK	25	12	0 mm	back	1:1	0.006	1.396	0.008
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Links	24.0	22.58	0.13	0	FH7TT00CJ768	QPSK	1	25	0 mm	back	1:1	0.004	1.387	0.006
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Metal Links	23.0	21.55	0.15	1	FH7TT00CJ768	QPSK	25	12	0 mm	back	1:1	0.003	1.396	0.004
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Sport	24.0	22.58	0.12	0	FH7TT00DJ768	QPSK	1	25	0 mm	back	1:1	0.013	1.387	0.018
836.50	20525	Md	LTE Band 5 (Cell)	10	Aluminum	Sport	23.0	21.55	0.18	1	FH7TT00DJ768	QPSK	25	12	0 mm	back	1:1	0.010	1.396	0.014
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Loop	24.0	22.58	0.15	0	FH7TT008J77H	QPSK	1	25	0 mm	back	1:1	0.009	1.387	0.012
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Loop	23.0	21.55	0.19	1	FH7TT008J77H	QPSK	25	12	0 mm	back	1:1	0.007	1.396	0.010
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Links	24.0	22.58	0.19	0	FH7TT005J77H	QPSK	1	25	0 mm	back	1:1	0.002	1.387	0.003
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Metal Links	23.0	21.55	0.13	1	FH7TT005J77H	QPSK	25	12	0 mm	back	1:1	0.001	1.396	0.001
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Sport	24.0	22.58	0.18	0	FH7TT00GJ776	QPSK	1	25	0 mm	back	1:1	0.013	1.387	0.018
836.50	20525	Md	LTE Band 5 (Cell)	10	Stainless Steel	Sport	23.0	21.55	0.19	1	FH7TT00GJ776	QPSK	25	12	0 mm	back	1:1	0.010	1.396	0.014
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Loop	24.0	22.58	0.16	0	FH7TT008J77R	QPSK	1	25	0 mm	back	1:1	0.013	1.387	0.018
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Loop	23.0	21.55	0.05	1	FH7TT008J77R	QPSK	25	12	0 mm	back	1:1	0.010	1.396	0.014
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Links	24.0	22.58	0.18	0	FH7TT00GJ77R	QPSK	1	25	0 mm	back	1:1	0.007	1.387	0.010
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Metal Links	23.0	21.55	0.21	1	FH7TT00GJ77R	QPSK	25	12	0 mm	back	1:1	0.006	1.396	0.008
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Sport	24.0	22.58	0.18	0	FH7TT00HJ77R	QPSK	1	25	0 mm	back	1:1	0.015	1.387	0.021
836.50	20525	Md	LTE Band 5 (Cell)	10	Ceramic	Sport	23.0	21.55	0.11	1	FH7TT00HJ77R	QPSK	25	12	0 mm	back	1:1	0.011	1.396	0.015
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-17
LTE Band 4 (AWS) Extremity SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.																(W/kg)			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Loop	24.0	23.36	-0.09	0	FH7TT00CJ768	QPSK	1	99	0 mm	back	1:1	0.061	1.159	0.071
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Loop	23.0	21.87	0.17	1	FH7TT00CJ768	QPSK	50	50	0 mm	back	1:1	0.046	1.297	0.060
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Links	24.0	23.36	0.06	0	FH7TT007J768	QPSK	1	99	0 mm	back	1:1	0.052	1.159	0.060
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Metal Links	23.0	21.87	0.09	1	FH7TT007J768	QPSK	50	50	0 mm	back	1:1	0.037	1.297	0.048
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Sport	24.0	23.36	0.04	0	FH7TT00DJ768	QPSK	1	99	0 mm	back	1:1	0.057	1.159	0.066
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Aluminum	Sport	23.0	21.87	0.08	1	FH7TT00DJ768	QPSK	50	50	0 mm	back	1:1	0.041	1.297	0.053
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Loop	24.0	23.36	-0.03	0	FH7TT005J77H	QPSK	1	99	0 mm	back	1:1	0.061	1.159	0.071
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Loop	23.0	21.87	0.06	1	FH7TT005J77H	QPSK	50	50	0 mm	back	1:1	0.043	1.297	0.056
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Links	24.0	23.36	0.04	0	FH7TT00GJ776	QPSK	1	99	0 mm	back	1:1	0.069	1.159	0.080
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Metal Links	23.0	21.87	0.17	1	FH7TT00GJ776	QPSK	50	50	0 mm	back	1:1	0.052	1.297	0.067
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Sport	24.0	23.36	0.16	0	FH7TT005J77H	QPSK	1	99	0 mm	back	1:1	0.042	1.159	0.049
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Stainless Steel	Sport	23.0	21.87	-0.12	1	FH7TT005J77H	QPSK	50	50	0 mm	back	1:1	0.032	1.297	0.042
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Loop	24.0	23.36	0.13	0	FH7TT008J77R	QPSK	1	99	0 mm	back	1:1	0.112	1.159	0.130
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Loop	23.0	21.87	-0.04	1	FH7TT008J77R	QPSK	50	50	0 mm	back	1:1	0.082	1.297	0.106
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Links	24.0	23.36	-0.17	0	FH7TT00GJ77R	QPSK	1	99	0 mm	back	1:1	0.054	1.159	0.063
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Metal Links	23.0	21.87	0.10	1	FH7TT00GJ77R	QPSK	50	50	0 mm	back	1:1	0.042	1.297	0.054
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Sport	24.0	23.36	0.06	0	FH7TT00HJ77R	QPSK	1	99	0 mm	back	1:1	0.060	1.159	0.070
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Ceramic	Sport	23.0	21.87	0.19	1	FH7TT00HJ77R	QPSK	50	50	0 mm	back	1:1	0.045	1.297	0.058
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-18
LTE Band 25 (PCS) Extremity SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.																(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Loop	24.0	23.04	0.03	0	FH7TT007J768	QPSK	1	99	0 mm	back	1:1	0.042	1.247	0.052
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Loop	23.0	21.90	0.06	1	FH7TT007J768	QPSK	50	0	0 mm	back	1:1	0.028	1.288	0.036
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Links	24.0	23.04	-0.08	0	FH7TT007J768	QPSK	1	99	0 mm	back	1:1	0.045	1.247	0.056
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Metal Links	23.0	21.90	0.10	1	FH7TT007J768	QPSK	50	0	0 mm	back	1:1	0.032	1.288	0.041
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Sport	24.0	23.04	0.02	0	FH7TT00GJ768	QPSK	1	99	0 mm	back	1:1	0.063	1.247	0.079
1860.00	26140	Low	LTE Band 25 (PCS)	20	Aluminum	Sport	23.0	21.90	0.13	1	FH7TT00GJ768	QPSK	50	0	0 mm	back	1:1	0.041	1.288	0.053
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Loop	24.0	23.04	0.20	0	FH7TT008J77H	QPSK	1	99	0 mm	back	1:1	0.023	1.247	0.029
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Loop	23.0	21.90	0.04	1	FH7TT008J77H	QPSK	50	0	0 mm	back	1:1	0.018	1.288	0.023
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Links	24.0	23.04	-0.05	0	FH7TT00AJ77H	QPSK	1	99	0 mm	back	1:1	0.027	1.247	0.034
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Metal Links	23.0	21.90	0.09	1	FH7TT00AJ77H	QPSK	50	0	0 mm	back	1:1	0.019	1.288	0.024
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Sport	24.0	23.04	0.19	0	FH7TT00AJ77H	QPSK	1	99	0 mm	back	1:1	0.035	1.247	0.044
1860.00	26140	Low	LTE Band 25 (PCS)	20	Stainless Steel	Sport	23.0	21.90	0.17	1	FH7TT00AJ77H	QPSK	50	0	0 mm	back	1:1	0.025	1.288	0.032
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Loop	24.0	23.04	0.11	0	FH7TT008J77R	QPSK	1	99	0 mm	back	1:1	0.104	1.247	0.130
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Loop	23.0	21.90	-0.05	1	FH7TT008J77R	QPSK	50	0	0 mm	back	1:1	0.078	1.288	0.100
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Links	24.0	23.04	0.13	0	FH7TT00AJ77R	QPSK	1	99	0 mm	back	1:1	0.051	1.247	0.064
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Metal Links	23.0	21.90	0.12	1	FH7TT00AJ77R	QPSK	50	0	0 mm	back	1:1	0.039	1.288	0.050
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Sport	24.0	23.04	0.06	0	FH7TT008J77R	QPSK	1	99	0 mm	back	1:1	0.085	1.247	0.106
1860.00	26140	Low	LTE Band 25 (PCS)	20	Ceramic	Sport	23.0	21.90	0.20	1	FH7TT008J77R	QPSK	50	0	0 mm	back	1:1	0.061	1.288	0.079
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-19
LTE Band 41 Extremity SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor (10g)	Reported SAR (10g)	Plot #
MHz	Ch.																(W/kg)			
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Loop	24.0	23.41	0.15	0	FH7TT00GJ768	QPSK	1	99	0 mm	back	1:1.58	0.026	1.146	0.030
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Loop	23.0	22.07	0.12	1	FH7TT00GJ768	QPSK	50	50	0 mm	back	1:1.58	0.015	1.239	0.019
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Links	24.0	23.41	0.10	0	FH7TT007J768	QPSK	1	99	0 mm	back	1:1.58	0.021	1.146	0.024
2506.00	39750	Low	LTE Band 41	20	Aluminum	Metal Links	23.0	22.07	0.15	1	FH7TT007J768	QPSK	50	50	0 mm	back	1:1.58	0.011	1.239	0.014
2506.00	39750	Low	LTE Band 41	20	Aluminum	Sport	24.0	23.41	0.18	0	FH7TT00CJ768	QPSK	1	99	0 mm	back	1:1.58	0.030	1.146	0.034
2506.00	39750	Low	LTE Band 41	20	Aluminum	Sport	23.0	22.07	0.17	1	FH7TT00CJ768	QPSK	50	50	0 mm	back	1:1.58	0.018	1.239	0.022
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Loop	24.0	23.41	0.17	0	FH7TT008J77H	QPSK	1	99	0 mm	back	1:1.58	0.010	1.146	0.011
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Loop	23.0	22.07	0.05	1	FH7TT008J77H	QPSK	50	50	0 mm	back	1:1.58	0.006	1.239	0.007
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Links	24.0	23.41	0.15	0	FH7TT008J77H	QPSK	1	99	0 mm	back	1:1.58	0.008	1.146	0.009
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Metal Links	23.0	22.07	0.19	1	FH7TT008J77H	QPSK	50	50	0 mm	back	1:1.58	0.004	1.239	0.005
2506.00	39750	Low	LTE Band 41	20	Stainless Steel	Sport	24.0	23.41	0.00	0	FH7TT00GJ776	QPSK	1	99	0 mm	back	1:1.58	0.018	1.146	0.021
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Loop	24.0	22.07	0.12	1	FH7TT00GJ776	QPSK	50	50	0 mm	back	1:1.58	0.010	1.239	0.012
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Links	24.0	23.41	0.12	0	FH7TT00HJ77R	QPSK	1	99	0 mm	back	1:1.58	0.012	1.146	0.014
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Loop	23.0	22.07	0.14	1	FH7TT00HJ77R	QPSK	50	50	0 mm	back	1:1.58	0.006	1.239	0.007
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Links	24.0	23.41	-0.13	0	FH7TT00AJ77R	QPSK	1	99	0 mm	back	1:1.58	0.007	1.146	0.008
2506.00	39750	Low	LTE Band 41	20	Ceramic	Metal Links	23.0	22.07	0.18	1	FH7TT00AJ77R	QPSK	50	50	0 mm	back	1:1.58	0.002	1.239	0.002
2506.00	39750	Low	LTE Band 41	20	Ceramic	Sport	24.0	23.41	-0.13	0	FH7TT00AJ77R	QPSK	1	99	0 mm	back	1:1.58	0.022	1.146	0.025
2506.00	39750	Low	LTE Band 41	20	Ceramic	Sport	23.0	22.07	0.13	1	FH7TT00AJ77R	QPSK	50	50	0 mm	back	1:1.58	0.017	1.239	0.021
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

Table 10-20
WLAN Extremity SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)				
2437	6	802.11b	DSSS	22	Aluminum	Metal Loop	19.5	19.47	-0.06	0 mm	FH7TT00GJ768	1	back	98.2	0.014	1.007	1.018	0.014	
2437	6	802.11b	DSSS	22	Aluminum	Metal Links	19.5	19.47	0.10	0 mm	FH7TT00GJ768	1	back	98.2	0.016	1.007	1.018	0.016	
2437	6	802.11b	DSSS	22	Aluminum	Sport	19.5	19.47	0.09	0 mm	FH7TT00GJ768	1	back	98.2	0.028	1.007	1.018	0.029	
2437	6	802.11b	DSSS	22	Stainless Steel	Metal Loop	19.5	19.47	0.05	0 mm	FH7TT008J77H	1	back	98.2	0.009	1.007	1.018	0.009	
2437	6	802.11b	DSSS	22	Stainless Steel	Metal Links	19.5	19.47	0.18	0 mm	FH7TT005J77H	1	back	98.2	0.009	1.007	1.018	0.009	
2437	6	802.11b	DSSS	22	Stainless Steel	Sport	19.5	19.47	0.12	0 mm	FH7TT005J77H	1	back	98.2	0.021	1.007	1.018	0.022	
2437	6	802.11b	DSSS	22	Ceramic	Metal Loop	19.5	19.47	0.14	0 mm	FH7TT004AJ77R	1	back	98.2	0.011	1.007	1.018	0.011	
2437	6	802.11b	DSSS	22	Ceramic	Metal Links	19.5	19.47	0.11	0 mm	FH7TT004AJ77R	1	back	98.2	0.009	1.007	1.018	0.009	
2437	6	802.11b	DSSS	22	Ceramic	Sport	19.5	19.47	-0.19	0 mm	FH7TT004AJ77R	1	back	98.2	0.014	1.007	1.018	0.014	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Extremity 4.0 W/kg (mW/g) averaged over 10 grams									

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 48 of 61

Table 10-21
Bluetooth (ePA) Extremity SAR

MEASUREMENT RESULTS																	Plot #	
FREQUENCY		Mode	Service	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (10g)		Scaling Factor	Reported SAR (10g) (W/kg)	
MHz	Ch.																	
2441	39	Bluetooth	FHSS	Aluminum	Metal Loop	19.0	18.95	0.13	0 mm	FH7TT007J768	1	back	1:1	0.013	1.012	0.013		
2441	39	Bluetooth	FHSS	Aluminum	Metal Links	19.0	18.95	-0.13	0 mm	FH7TT007J768	1	back	1:1	0.013	1.012	0.013		
2441	39	Bluetooth	FHSS	Aluminum	Sport	19.0	18.95	0.06	0 mm	FH7TT007J768	1	back	1:1	0.034	1.012	0.034	A25	
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Loop	19.0	18.95	0.14	0 mm	FH7TT005J77H	1	back	1:1	0.006	1.012	0.006		
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Links	19.0	18.95	0.18	0 mm	FH7TT005J77H	1	back	1:1	0.010	1.012	0.010		
2441	39	Bluetooth	FHSS	Stainless Steel	Sport	19.0	18.95	0.12	0 mm	FH7TT005J77H	1	back	1:1	0.018	1.012	0.018		
2441	39	Bluetooth	FHSS	Ceramic	Metal Loop	19.0	18.95	0.19	0 mm	FH7TT008J77R	1	back	1:1	0.007	1.012	0.007		
2441	39	Bluetooth	FHSS	Ceramic	Metal Links	19.0	18.95	0.19	0 mm	FH7TT008J77R	1	back	1:1	0.008	1.012	0.008		
2441	39	Bluetooth	FHSS	Ceramic	Sport	19.0	18.95	0.00	0 mm	FH7TT008J77R	1	back	1:1	0.016	1.012	0.016		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Extremity 4.0 W/kg (mW/g) averaged over 10 grams									

Table 10-22
Bluetooth (iPA) Extremity SAR

MEASUREMENT RESULTS																	Plot #	
FREQUENCY		Mode	Service	Housing Type	Wrist Band Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (10g)		Scaling Factor	Reported SAR (10g) (W/kg)	
MHz	Ch.																	
2441	39	Bluetooth	FHSS	Aluminum	Metal Loop	13.0	12.98	0.16	0 mm	FH7TT007J768	1	back	1:1	0.004	1.005	0.004		
2441	39	Bluetooth	FHSS	Aluminum	Metal Links	13.0	12.98	0.01	0 mm	FH7TT007J768	1	back	1:1	0.005	1.005	0.005		
2441	39	Bluetooth	FHSS	Aluminum	Sport	13.0	12.98	0.00	0 mm	FH7TT007J768	1	back	1:1	0.008	1.005	0.008	A26	
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Loop	13.0	12.98	0.02	0 mm	FH7TT00GJ776	1	back	1:1	0.001	1.005	0.001		
2441	39	Bluetooth	FHSS	Stainless Steel	Metal Links	13.0	12.98	0.14	0 mm	FH7TT00GJ776	1	back	1:1	0.003	1.005	0.003		
2441	39	Bluetooth	FHSS	Stainless Steel	Sport	13.0	12.98	-0.16	0 mm	FH7TT00GJ776	1	back	1:1	0.004	1.005	0.004		
2441	39	Bluetooth	FHSS	Ceramic	Metal Loop	13.0	12.98	0.07	0 mm	FH7TT008J77R	1	back	1:1	0.003	1.005	0.003		
2441	39	Bluetooth	FHSS	Ceramic	Metal Links	13.0	12.98	0.13	0 mm	FH7TT008J77R	1	back	1:1	0.003	1.005	0.003		
2441	39	Bluetooth	FHSS	Ceramic	Sport	13.0	12.98	0.14	0 mm	FH7TT008J77R	1	back	1:1	0.005	1.005	0.005		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Extremity 4.0 W/kg (mW/g) averaged over 10 grams									

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 49 of 61

10.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg for 1g SAR and 2.0 W/kg for 10g SAR.
7. This device has three housing types: Aluminum, Stainless Steel and Ceramic. The non-metallic wrist accessory, sport band, was evaluated for all exposure conditions. The available metallic wrist accessories, metal links band and metal loop band, were additionally evaluated.
8. This device is a portable wrist-worn device and does not support any other use conditions. Therefore the procedures in FCC KDB Publication 447498 D01v06 Section 6.2 have been applied for extremity and next to mouth (head) conditions.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g SAR and > 1.5 W/kg for 10g SAR, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

FCC ID: BCG-A1860	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 50 of 61

WLAN/BT Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.2 for more information. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
2. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.
3. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
4. To determine compliance, Bluetooth SAR was measured with internal power amplifier and external power amplifier. Bluetooth was evaluated with a test mode with 100% transmission duty factor.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 51 of 61

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR or 10-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg or ≤ 4.0 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

11.3 Head SAR Simultaneous Transmission Analysis

For SAR summation, the highest reported SAR across all housing and wrist band types was used as a conservative evaluation for simultaneous transmission analysis.

Table 11-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Head at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	UMTS 850	0.112	0.089	0.201
	UMTS 1750	0.526	0.089	0.615
	UMTS 1900	0.510	0.089	0.599
	LTE Band 12	0.083	0.089	0.172
	LTE Band 13	0.116	0.089	0.205
	LTE Band 26 (Cell)	0.109	0.089	0.198
	LTE Band 5 (Cell)	0.104	0.089	0.193
	LTE Band 4 (AWS)	0.372	0.089	0.461
	LTE Band 25 (PCS)	0.364	0.089	0.453
	LTE Band 41	0.126	0.089	0.215

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 52 of 61

Table 11-2
Simultaneous Transmission Scenario with Bluetooth (ePA) (Head at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth (ePA) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	UMTS 850	0.112	0.094	0.206
	UMTS 1750	0.526	0.094	0.620
	UMTS 1900	0.510	0.094	0.604
	LTE Band 12	0.083	0.094	0.177
	LTE Band 13	0.116	0.094	0.210
	LTE Band 26 (Cell)	0.109	0.094	0.203
	LTE Band 5 (Cell)	0.104	0.094	0.198
	LTE Band 4 (AWS)	0.372	0.094	0.466
	LTE Band 25 (PCS)	0.364	0.094	0.458
	LTE Band 41	0.126	0.094	0.220

Table 11-3
Simultaneous Transmission Scenario with Bluetooth (iPA) (Head at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth (iPA) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	UMTS 850	0.112	0.022	0.134
	UMTS 1750	0.526	0.022	0.548
	UMTS 1900	0.510	0.022	0.532
	LTE Band 12	0.083	0.022	0.105
	LTE Band 13	0.116	0.022	0.138
	LTE Band 26 (Cell)	0.109	0.022	0.131
	LTE Band 5 (Cell)	0.104	0.022	0.126
	LTE Band 4 (AWS)	0.372	0.022	0.394
	LTE Band 25 (PCS)	0.364	0.022	0.386
	LTE Band 41	0.126	0.022	0.148

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 53 of 61

11.4 Extremity SAR Simultaneous Transmission Analysis

Table 11-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Extremity at 0.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Extremity SAR	UMTS 850	0.026	0.029	0.055
	UMTS 1750	0.179	0.029	0.208
	UMTS 1900	0.169	0.029	0.198
	LTE Band 12	0.019	0.029	0.048
	LTE Band 13	0.022	0.029	0.051
	LTE Band 26 (Cell)	0.024	0.029	0.053
	LTE Band 5 (Cell)	0.021	0.029	0.050
	LTE Band 4 (AWS)	0.130	0.029	0.159
	LTE Band 25 (PCS)	0.130	0.029	0.159
	LTE Band 41	0.034	0.029	0.063

Table 11-5
Simultaneous Transmission Scenario with Bluetooth (ePA) (Extremity at 0.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth (ePA) SAR (W/kg)	Σ SAR (W/kg)
Extremity SAR	UMTS 850	0.026	0.034	0.060
	UMTS 1750	0.179	0.034	0.213
	UMTS 1900	0.169	0.034	0.203
	LTE Band 12	0.019	0.034	0.053
	LTE Band 13	0.022	0.034	0.056
	LTE Band 26 (Cell)	0.024	0.034	0.058
	LTE Band 5 (Cell)	0.021	0.034	0.055
	LTE Band 4 (AWS)	0.130	0.034	0.164
	LTE Band 25 (PCS)	0.130	0.034	0.164
	LTE Band 41	0.034	0.034	0.068

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch		Page 54 of 61

Table 11-6
Simultaneous Transmission Scenario with Bluetooth (iPA) (Extremity at 0.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth (iPA) SAR (W/kg)	Σ SAR (W/kg)
Extremity SAR	UMTS 850	0.026	0.008	0.034
	UMTS 1750	0.179	0.008	0.187
	UMTS 1900	0.169	0.008	0.177
	LTE Band 12	0.019	0.008	0.027
	LTE Band 13	0.022	0.008	0.030
	LTE Band 26 (Cell)	0.024	0.008	0.032
	LTE Band 5 (Cell)	0.021	0.008	0.029
	LTE Band 4 (AWS)	0.130	0.008	0.138
	LTE Band 25 (PCS)	0.130	0.008	0.138
	LTE Band 41	0.034	0.008	0.042

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 55 of 61	

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg for 1g SAR and 2.0 W/kg for 10g SAR.

12.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g SAR and <3.75 W/kg for 10g SAR for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis was not required.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 56 of 61

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/22/2017	Annual	3/22/2018	MY45470194
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
SPEAG	D750V3	750 MHz SAR Dipole	9/19/2016	Annual	9/19/2017	1097
SPEAG	D850V2	850 MHz SAR Dipole	8/16/2016	Annual	8/16/2017	1009
SPEAG	D850V2	850 MHz SAR Dipole	9/19/2016	Annual	9/19/2017	1010
SPEAG	D1750V2	1750 MHz SAR Dipole	9/14/2016	Annual	9/14/2017	1104
SPEAG	D1900V2	1900 MHz SAR Dipole	8/18/2016	Annual	8/18/2017	5d180
SPEAG	D1900V2	1900 MHz SAR Dipole	9/19/2016	Annual	9/19/2017	5d181
SPEAG	D2450V2	2450 MHz SAR Dipole	9/13/2016	Annual	9/13/2017	921
SPEAG	ES3DV3	SAR Probe	11/11/2016	Annual	11/11/2017	3347
SPEAG	EX3DV4	SAR Probe	11/15/2016	Annual	11/15/2017	7420
SPEAG	ES3DV3	SAR Probe	3/16/2017	Annual	3/16/2018	3118
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3329
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/15/2016	Annual	11/15/2017	1450
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/21/2016	Annual	9/21/2017	1449
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2017	Annual	3/8/2018	1213
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/10/2017	Annual	3/10/2018	1403
Rohde & Schwarz	CMU200	Base Station Simulator	4/11/2017	Annual	4/11/2018	836371/0079
Mitutoyo	CD-6"CSX	Digital Caliper	3/2/2016	Biennial	3/2/2018	13264162
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	E4438C	ESG Vector Signal Generator	3/23/2017	Annual	3/23/2018	MY47270002
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Agilent	N5182A	MXG Vector Signal Generator	10/27/2016	Annual	10/27/2017	MY47420603
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/25/2016	Annual	8/25/2017	1041
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	1039008
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1126066
Rohde & Schwarz	CMW500	Radio Communication Tester	10/20/2016	Annual	10/20/2017	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	5/4/2017	Annual	5/4/2018	112347
Rohde & Schwarz	CMW500	Radio Communication Tester	5/4/2017	Annual	5/4/2018	101699
Rohde & Schwarz	CMW500	Radio Communication Tester	10/13/2016	Annual	10/13/2017	102060
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/19/2016	Annual	8/19/2017	MY40003841
Agilent	8753ES	S-Parameter Vector Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Seekonk	NC-100	Torque Wrench (8"lb)	9/1/2016	Biennial	9/1/2018	21053
Seekonk	NC-100	Torque Wrench (8"lb)	8/30/2016	Biennial	8/30/2018	N/A
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Control Company	4352	Ultra Long Stem Thermometer	3/3/2017	Biennial	3/3/2019	170155534
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231538
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231535
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/10/2017	Annual	2/10/2018	162125
Agilent	E5515C	Wireless Communications Test Set	1/29/2016	Biennial	1/29/2018	GB46310798
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M1SSA00-009
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A

Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment item was used solely within its respective calibration period.

FCC ID: BCG-A1860	PCTEST® ENGINEERING LABORATORY, INC.			SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N:	Test Dates:	DUT Type:			
1C1706160002-60-01-R3.BCG	06/19/17 – 08/21/17	Watch			

14 MEASUREMENT UNCERTAINTIES

a	c	d	e = f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: BCG-A1860	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 59 of 61

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 60 of 61

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D06
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCG-A1860	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1706160002-60-01-R3.BCG	Test Dates: 06/19/17 – 08/21/17	DUT Type: Watch	Page 61 of 61

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT008J77H


Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 850 Head Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.025$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2017; Ambient Temp: 19.5°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7420; ConvF(10.1, 10.1, 10.1); Calibrated: 11/15/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/21/2016
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Head SAR, Front side
Mid.ch, Stainless Steel, Sport wrist band**

Area Scan (5x5x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.164 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.169 W/kg
SAR(1 g) = 0.077 W/kg

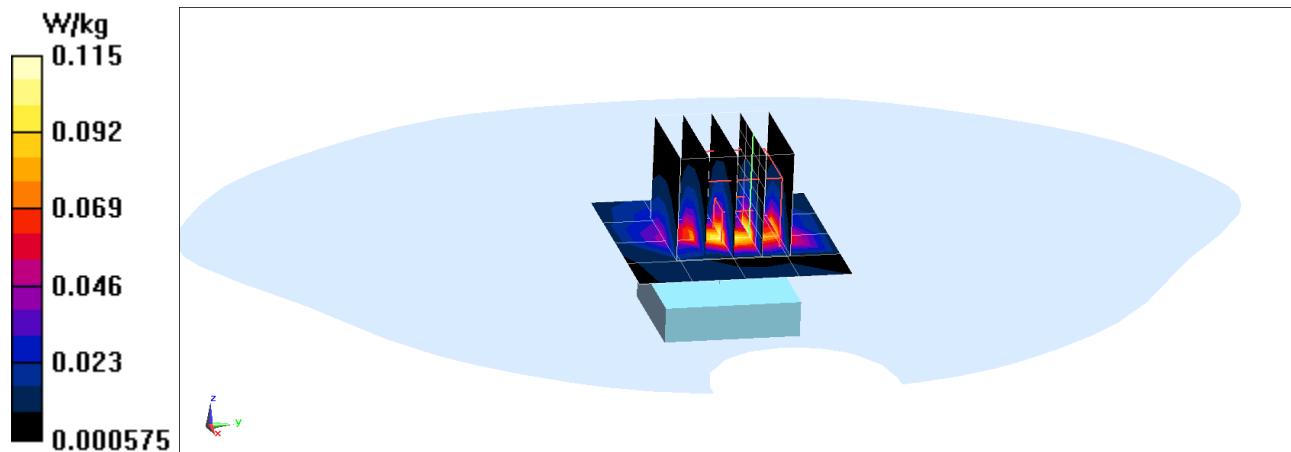

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00GJ776

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 39.225$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2017; Ambient Temp: 20.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7420; ConvF(8.5, 8.5, 8.5); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1750, Head SAR, Front side
Mid.ch, Stainless Steel, Metal Loop wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.08 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.411 W/kg

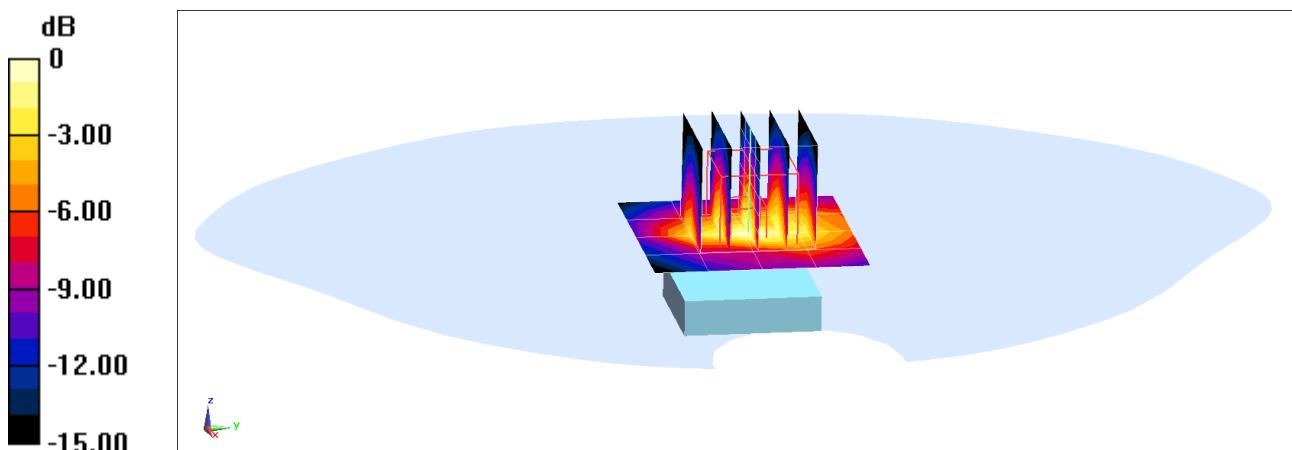

0 dB = 0.609 W/kg = -2.15 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00AJ77R

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.398$ S/m; $\epsilon_r = 38.822$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-22-2017; Ambient Temp: 20.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3118; ConvF(5.05, 5.05, 5.05); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Head SAR, Front side
Mid.ch, Ceramic, Metal Loop wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.375 W/kg

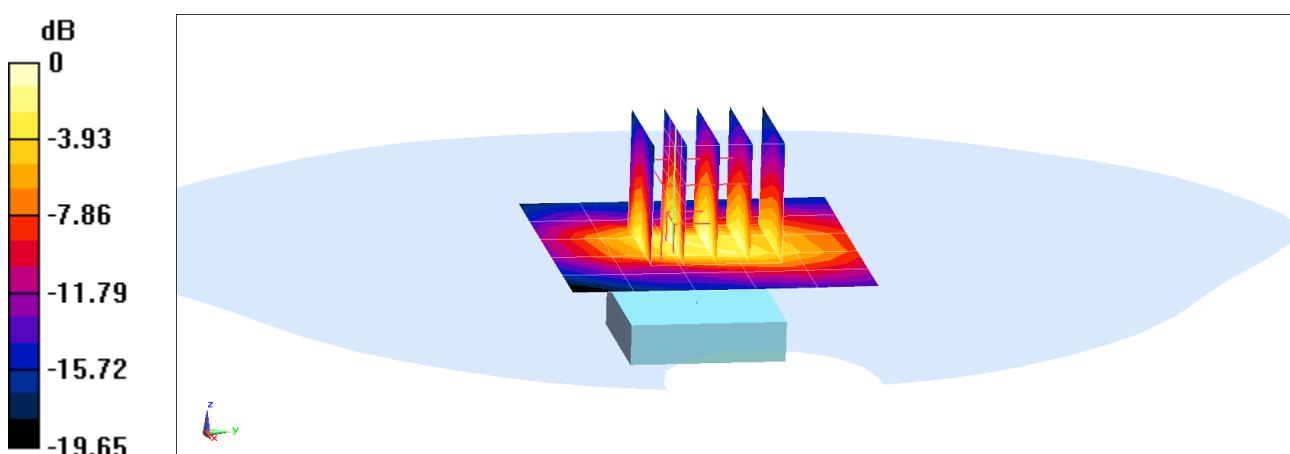

0 dB = 0.451 W/kg = -3.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT005J77H

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 41.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2017; Ambient Temp: 19.1°C; Tissue Temp: 19.6°C

Probe: ES3DV3 - SN3347; ConvF(6.75, 6.75, 6.75); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Head SAR, Front side, Mid.ch, 10 MHz Bandwidth
QPSK, 1 RB, 25 RB Offset, Stainless Steel, Metal Links wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.415 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.057 W/kg

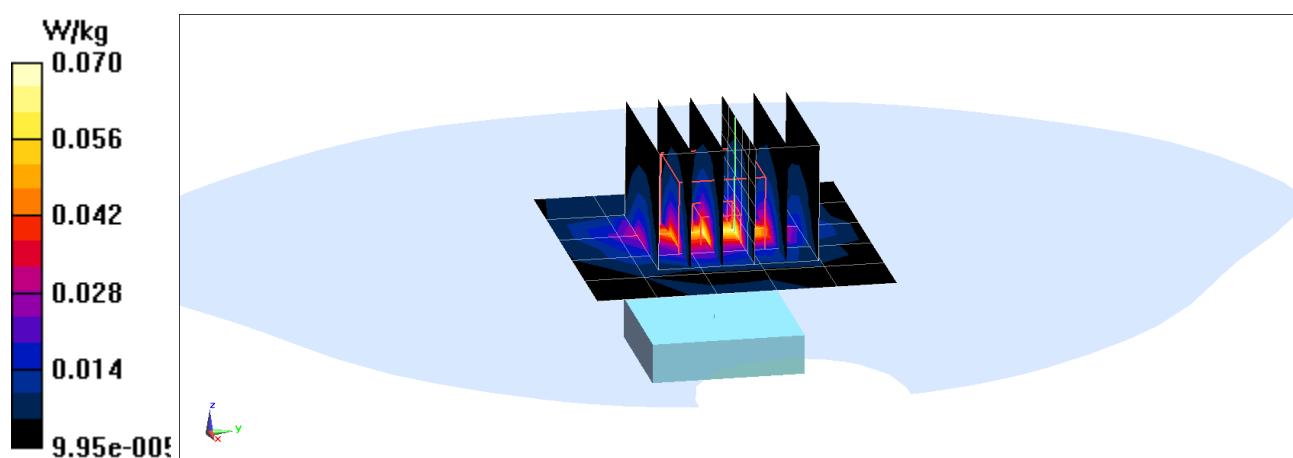

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT005J77H

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 782$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 40.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2017; Ambient Temp: 19.1°C; Tissue Temp: 19.6°C

Probe: ES3DV3 - SN3347; ConvF(6.75, 6.75, 6.75); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Head SAR, Front side, Mid.ch, 10 MHz Bandwidth
QPSK, 1 RB, 25 RB Offset, Stainless Steel, Metal Links wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.913 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.080 W/kg

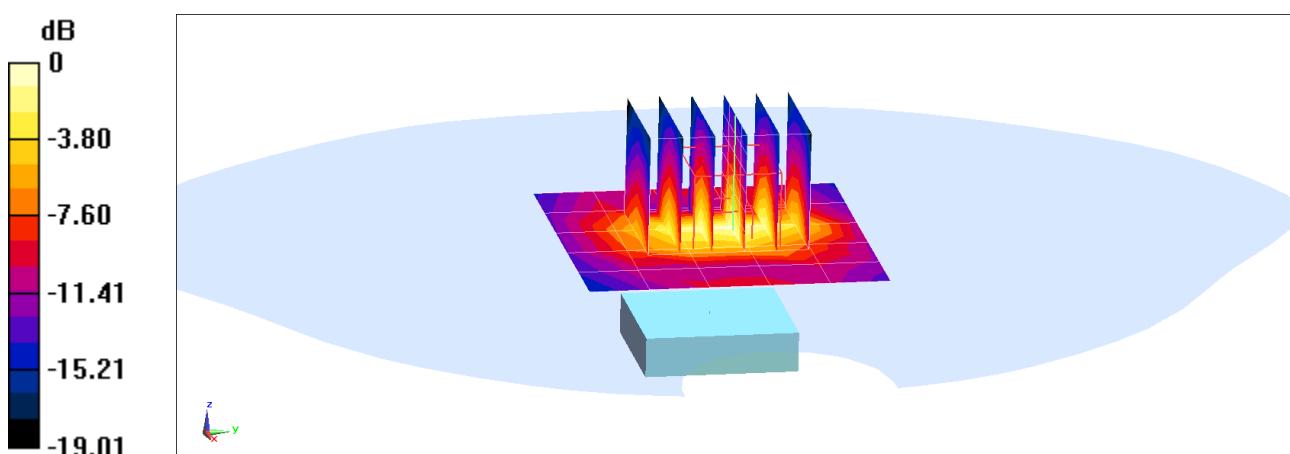

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00AJ77H

Communication System: UID 0, LTE Band 26; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 850 Head Medium parameters used (interpolated):

$f = 844$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-18-2017; Ambient Temp: 20.7°C; Tissue Temp: 19.5°C

Probe: ES3DV3 - SN3118; ConvF(6.32, 6.32, 6.32); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Head SAR, Front side, High.ch, 10 MHz Bandwidth
QPSK, 1 RB, 49 RB Offset, Stainless Steel, Metal Links wrist band**


Area Scan (5x5x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.012 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.083 W/kg

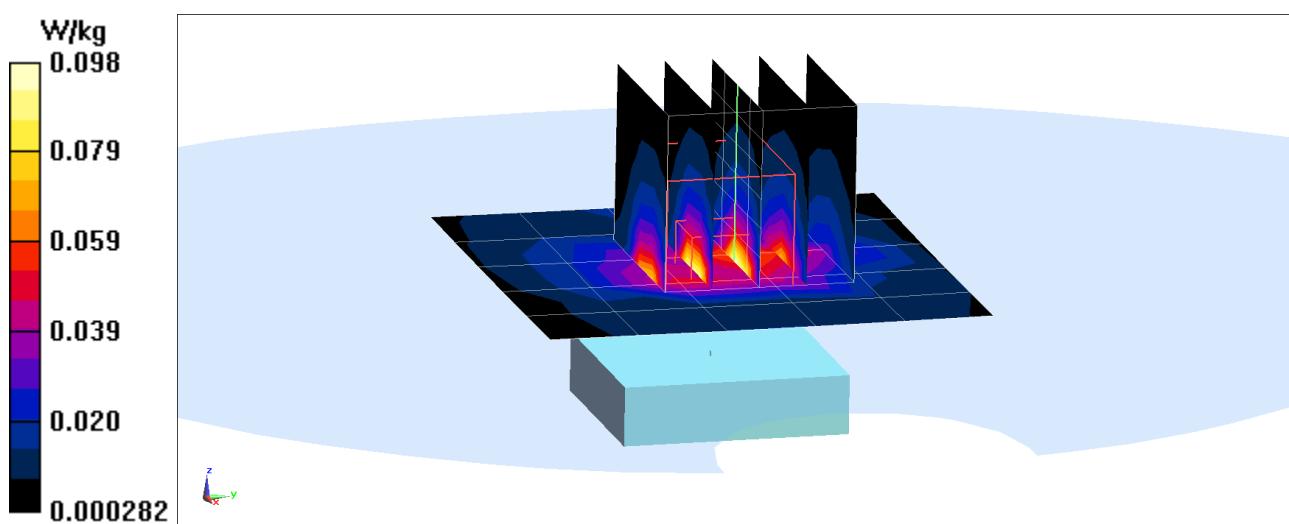

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00CJ768

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 850 Head Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-07-2017; Ambient Temp: 19.8°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3118; ConvF(6.32, 6.32, 6.32); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Head SAR, Front side, Mid.ch, 10 MHz Bandwidth
QPSK, 1 RB, 25 RB Offset, Aluminum, Metal Links wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.312 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.075 W/kg

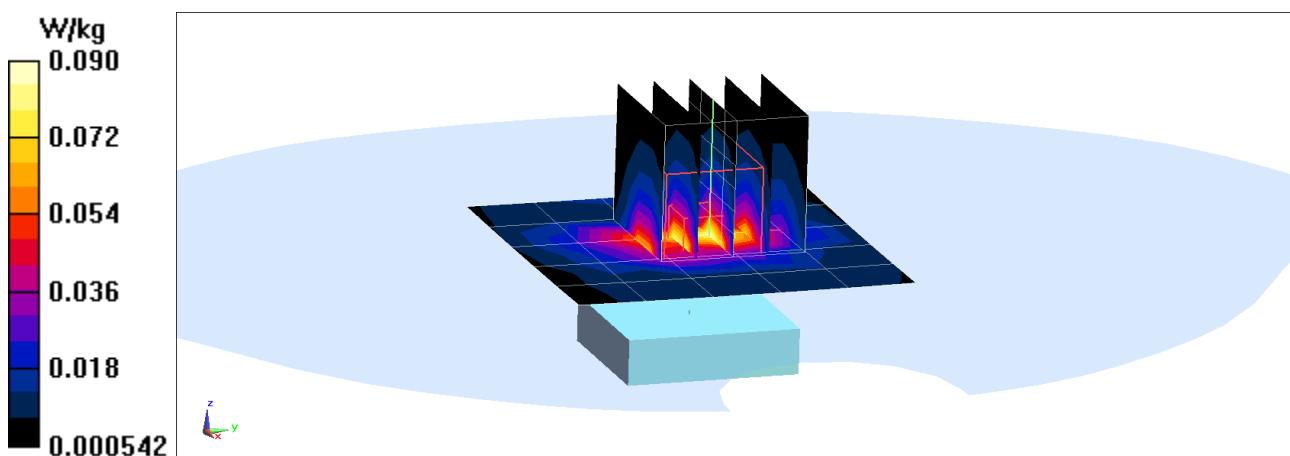

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00GJ768


Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used (interpolated):
 $f = 1732.5$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0. cm

Test Date: 06-26-2017; Ambient Temp: 22.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3118; ConvF(5.21, 5.21, 5.21); Calibrated: 03/16/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1213; Calibrated: 03/08/2017
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Head SAR, Front side, Mid.ch, 20 MHz Bandwidth
QPSK, 1 RB, 99 RB Offset, Aluminum, Metal Links wrist band**

Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.76 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.568 W/kg
SAR(1 g) = 0.321 W/kg

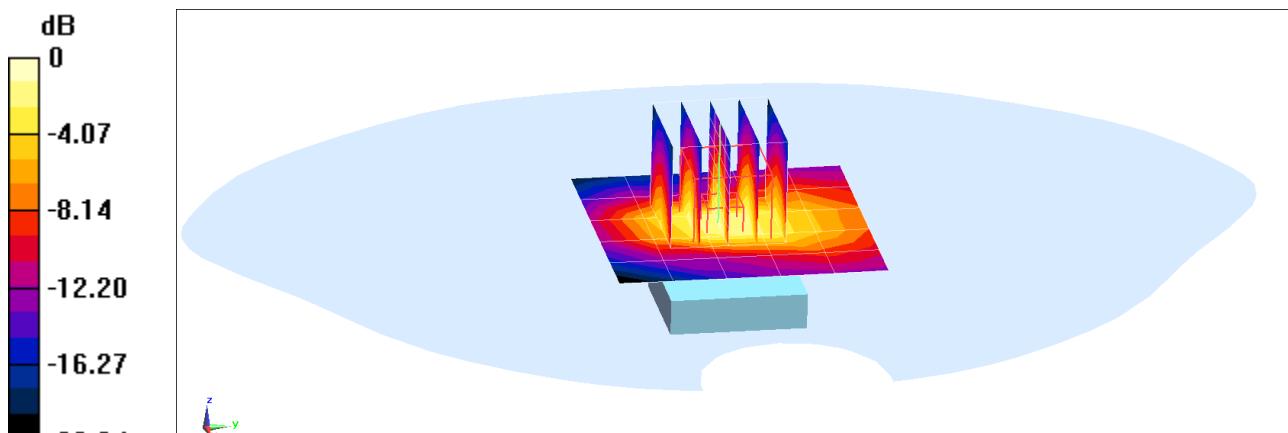

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00GJ77R

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1860$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.098$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-20-2017; Ambient Temp: 20.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3118; ConvF(5.05, 5.05, 5.05); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Head SAR, Front side, Low.ch, 20 MHz Bandwidth
QPSK, 1 RB, 99 RB Offset, Ceramic, Metal Loop wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.292 W/kg

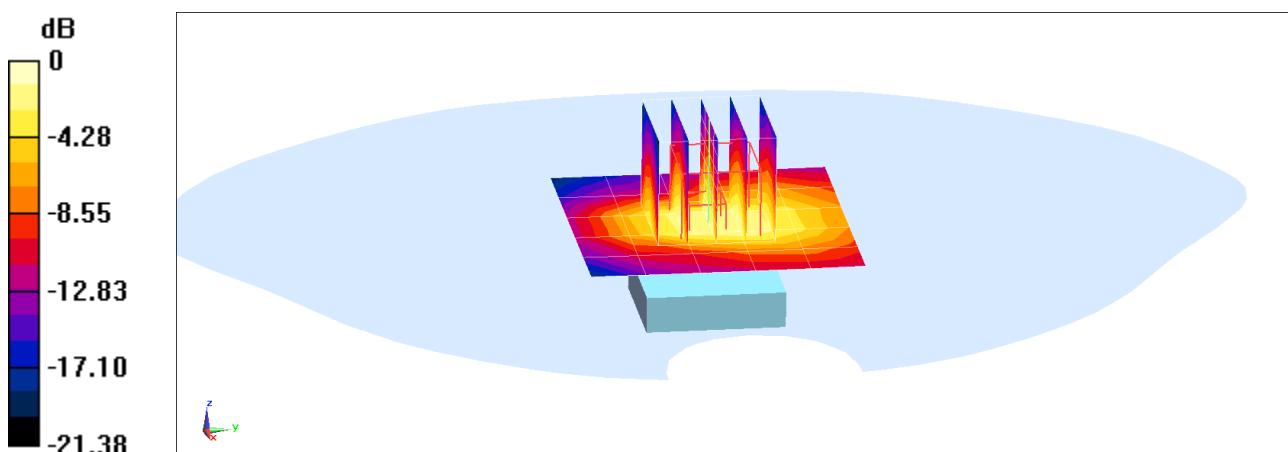

0 dB = 0.363 W/kg = -4.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00CJ768

Communication System: UID 0, LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2506$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 39.304$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-03-2017; Ambient Temp: 21.7°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3118; ConvF(4.37, 4.37, 4.37); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Head SAR, Front side, Low.ch, 20 MHz Bandwidth
QPSK, 1 RB, 99 RB Offset, Aluminum, Sport wrist band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.869 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.110 W/kg

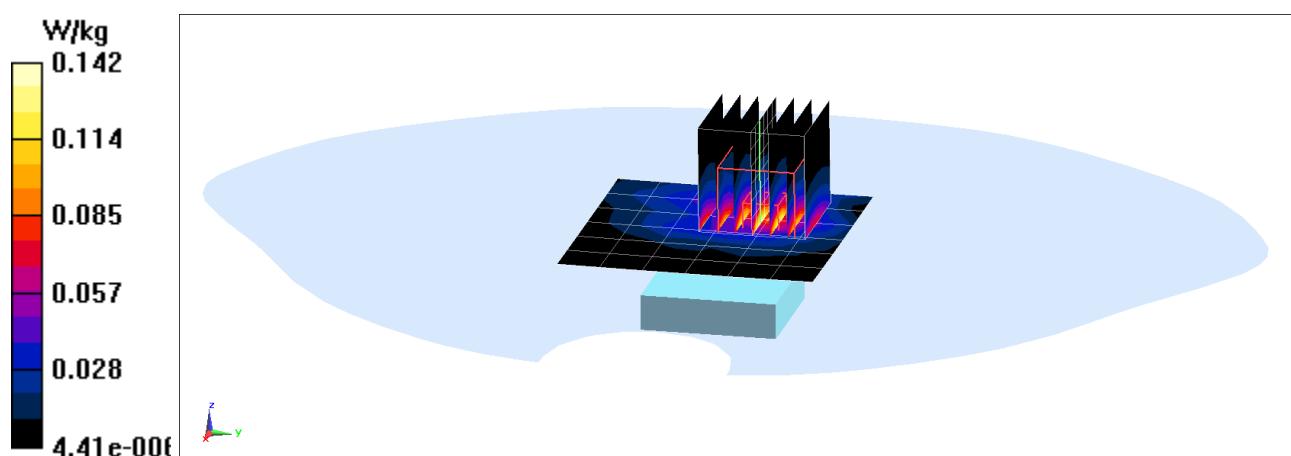

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT007J768

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 39.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-28-2017; Ambient Temp: 21.5°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3118; ConvF(4.37, 4.37, 4.37); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Head SAR
Ch 6, 1 Mbps, Front Side, Aluminum, Sport wrist band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.434 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.087 W/kg

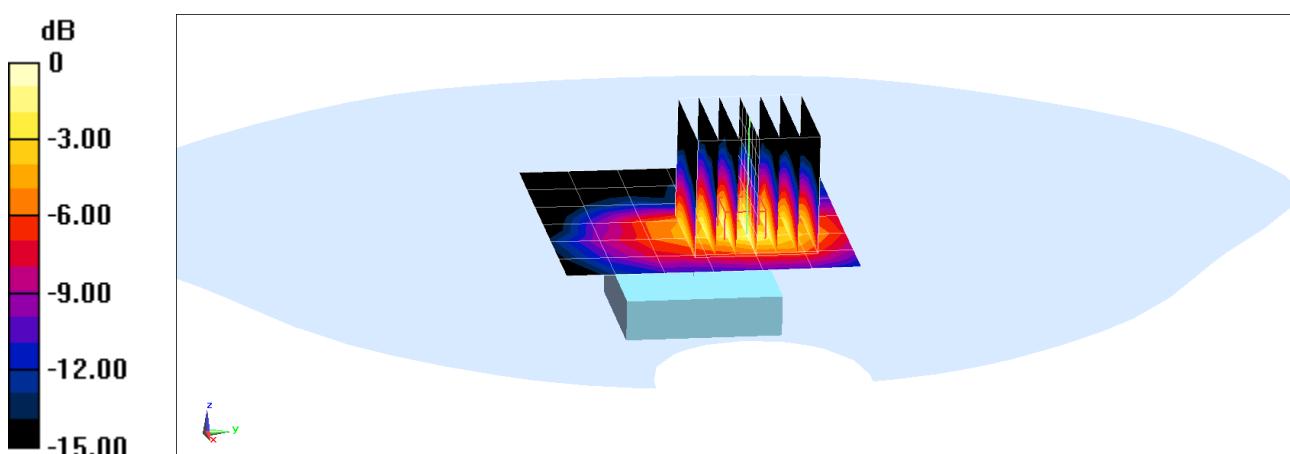

0 dB = 0.114 W/kg = -9.43 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT007J768

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2441$ MHz; $\sigma = 1.867$ S/m; $\epsilon_r = 39.551$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-03-2017; Ambient Temp: 21.7°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3118; ConvF(4.37, 4.37, 4.37); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth (ePA), Head SAR, Ch 39, 1 Mbps
Front Side, Aluminum, Sport wrist band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.610 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.093 W/kg

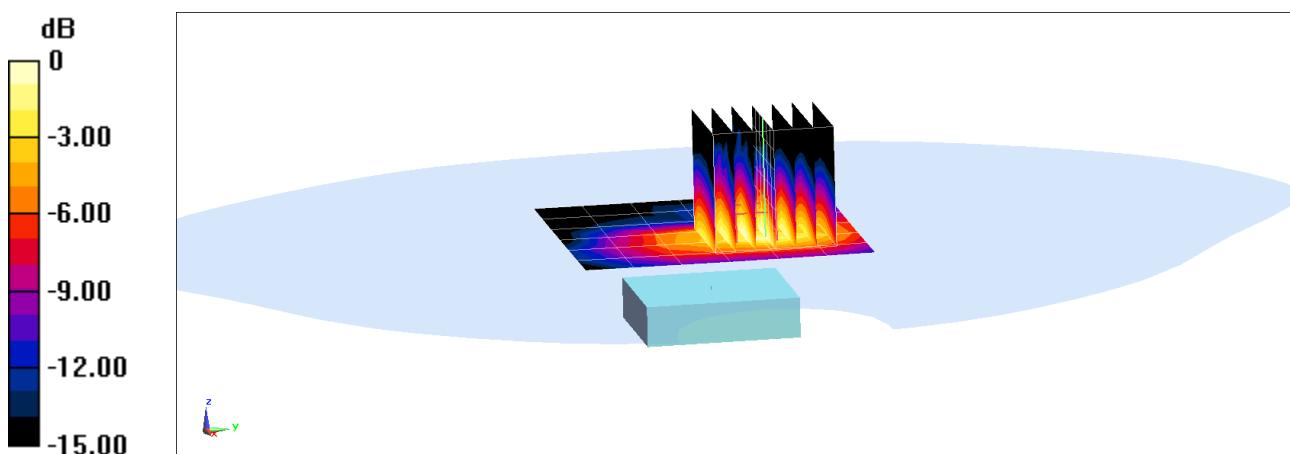

0 dB = 0.116 W/kg = -9.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00HJ77R

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2441$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 39.549$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-13-2017; Ambient Temp: 23.1°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3347; ConvF(4.67, 4.67, 4.67); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth (iPA), Head SAR, Ch 39, 1 Mbps
Front Side, Ceramic, Sport wrist band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.787 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.022 W/kg

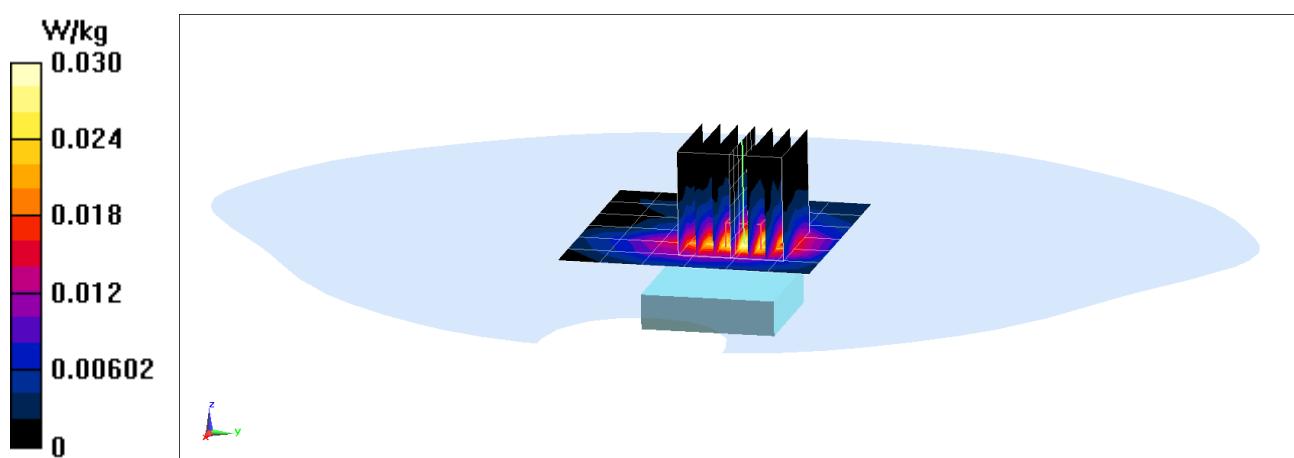

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00HJ77R


Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 850 Body Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 54.924$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-21-2017; Ambient Temp: 20.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7420; ConvF(9.73, 9.73, 9.73); Calibrated: 11/15/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/21/2016
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Extremity SAR, Back side
Mid.ch, Ceramic, Sport wrist band**

Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.295 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.0780 W/kg
SAR(10 g) = 0.018 W/kg

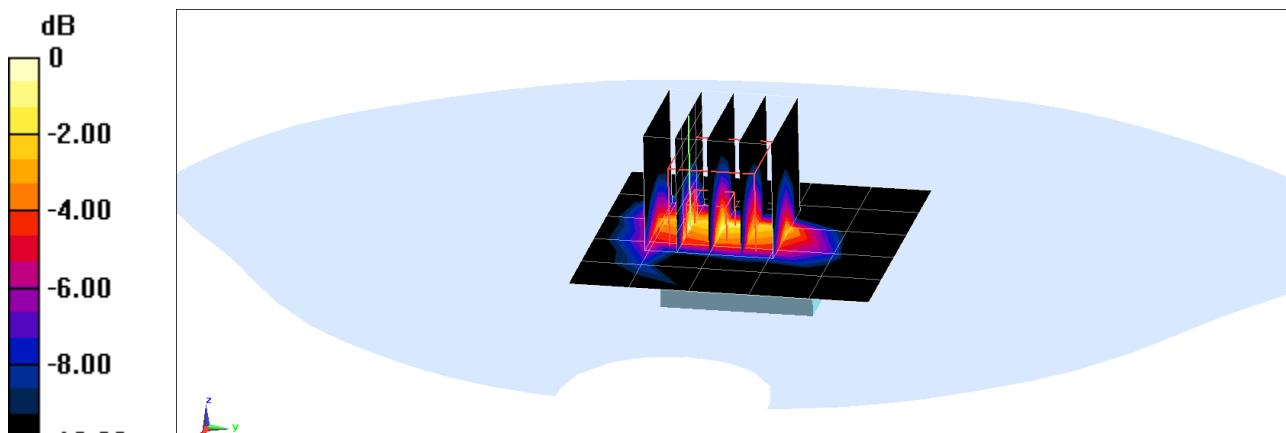

0 dB = 0.0607 W/kg = -12.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00GJ77R

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.681$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-03-2017; Ambient Temp: 20.2°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7420; ConvF(8.05, 8.05, 8.05); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1750, Extremity SAR, Back side
Mid.ch, Ceramic, Metal Loop wrist band**


Area Scan (5x5x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.29 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(10 g) = 0.140 W/kg

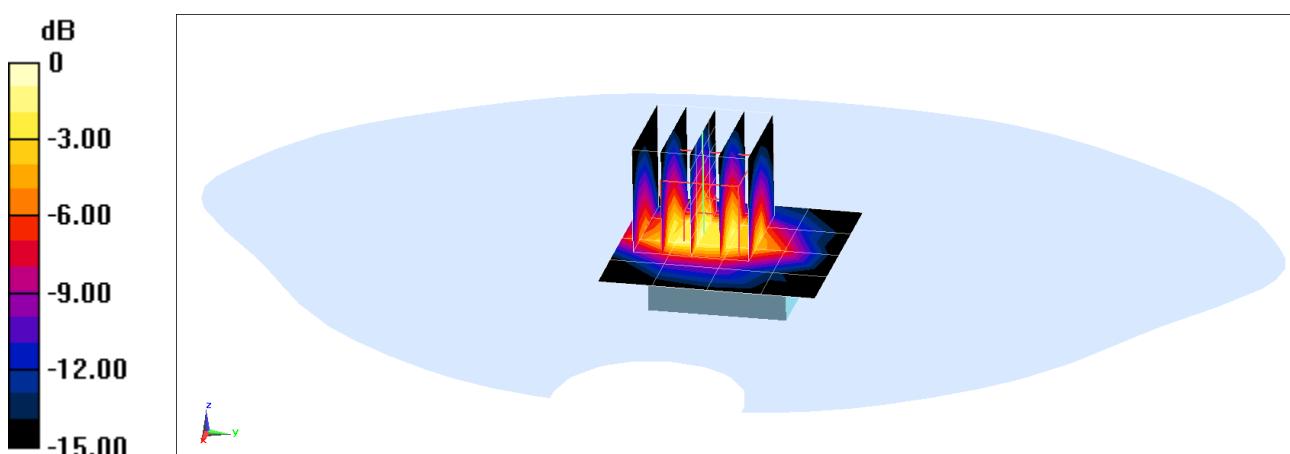

0 dB = 0.420 W/kg = -3.77 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT008J77R

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 51.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-19-2017; Ambient Temp: 19.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7420; ConvF(7.79, 7.79, 7.79); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Extremity SAR, Back side
Mid.ch, Ceramic, Metal Loop wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.39 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(10 g) = 0.124 W/kg

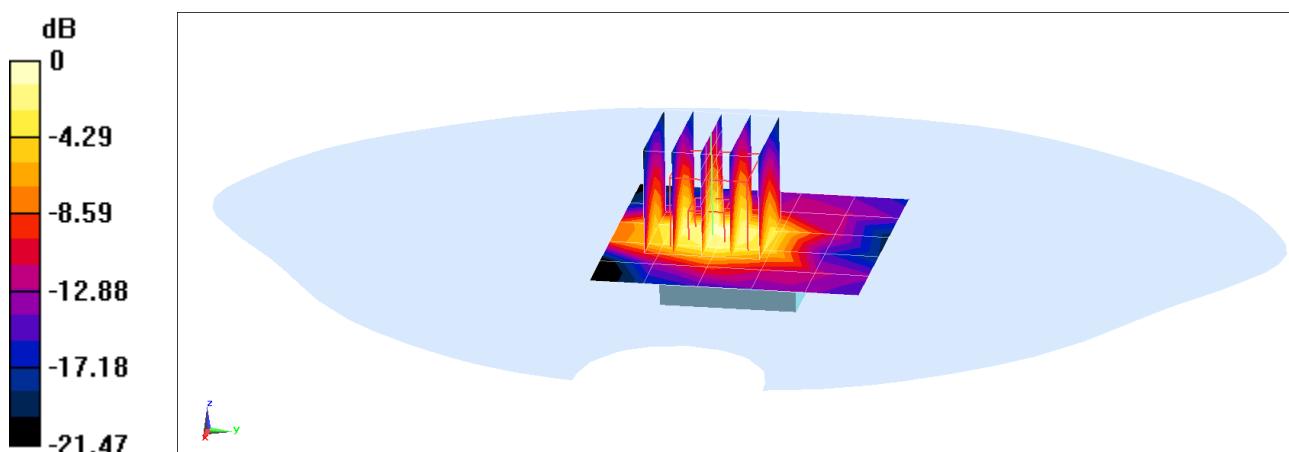

0 dB = 0.361 W/kg = -4.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00AJ77R

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 55.048$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-22-2017; Ambient Temp: 19.3°C; Tissue Temp: 20.2°C

Probe: ES3DV3 - SN3347; ConvF(6.47, 6.47, 6.47); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 12, Extremity SAR, Back side, Mid.ch, 10 MHz Bandwidth QPSK, 1 RB, 25 RB Offset, Ceramic, Metal Loop wrist band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.539 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(10 g) = 0.013 W/kg

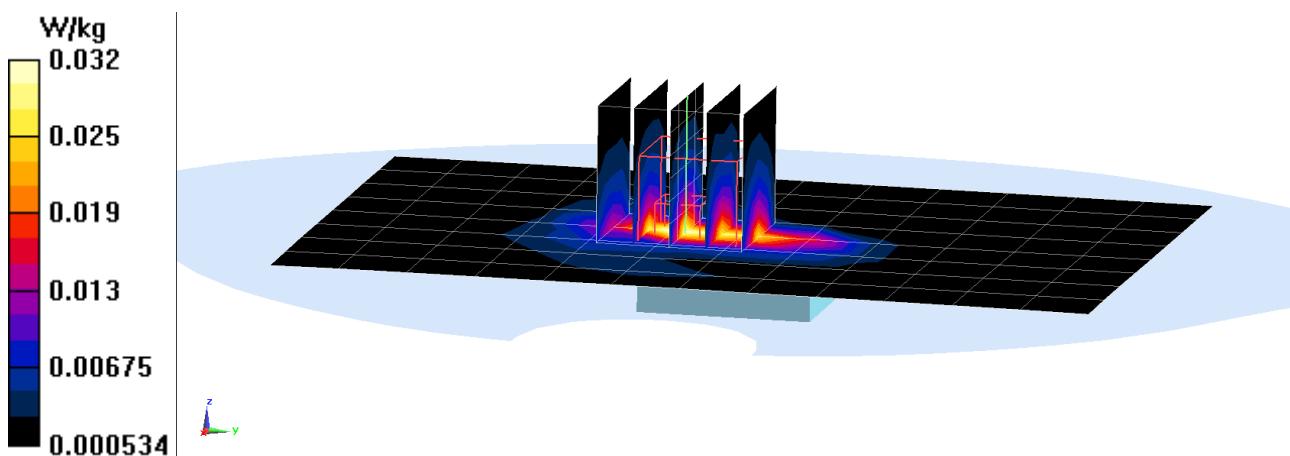

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00AJ77R


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 750 Body Medium parameters used (interpolated):
 $f = 782$ MHz; $\sigma = 1.013$ S/m; $\epsilon_r = 53.985$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-22-2017; Ambient Temp: 19.3°C; Tissue Temp: 20.2°C

Probe: ES3DV3 - SN3347; ConvF(6.47, 6.47, 6.47); Calibrated: 11/11/2016;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1450; Calibrated: 11/15/2016
Phantom: SAM with CRP; Type: SAM; Serial: TP:1792
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Extremity SAR, Back side, Mid.ch, 10 MHz Bandwidth
QPSK, 1 RB, 25 RB Offset, Ceramic, Metal Loop wrist band**

Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.134 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.0650 W/kg
SAR(10 g) = 0.015 W/kg

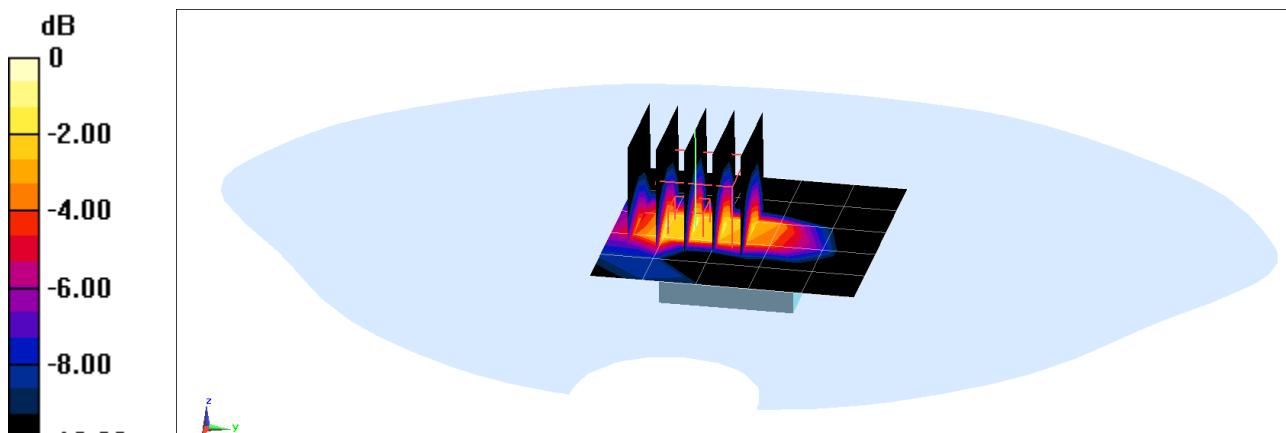

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT008J77R


Communication System: UID 0, LTE Band 26; Frequency: 844 MHz; Duty Cycle: 1:1
Medium: 850 Body Medium parameters used (interpolated):
 $f = 844$ MHz; $\sigma = 1.008$ S/m; $\epsilon_r = 55.166$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-21-2017; Ambient Temp: 19.9°C; Tissue Temp: 19.4°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 03/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1403; Calibrated: 03/10/2017
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1873
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Extremity SAR, Back side, High.ch, 10 MHz Bandwidth
QPSK, 1 RB, 49 RB Offset, Ceramic, Metal Loop wrist band**

Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.455 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.0820 W/kg
SAR(10 g) = 0.018W/kg

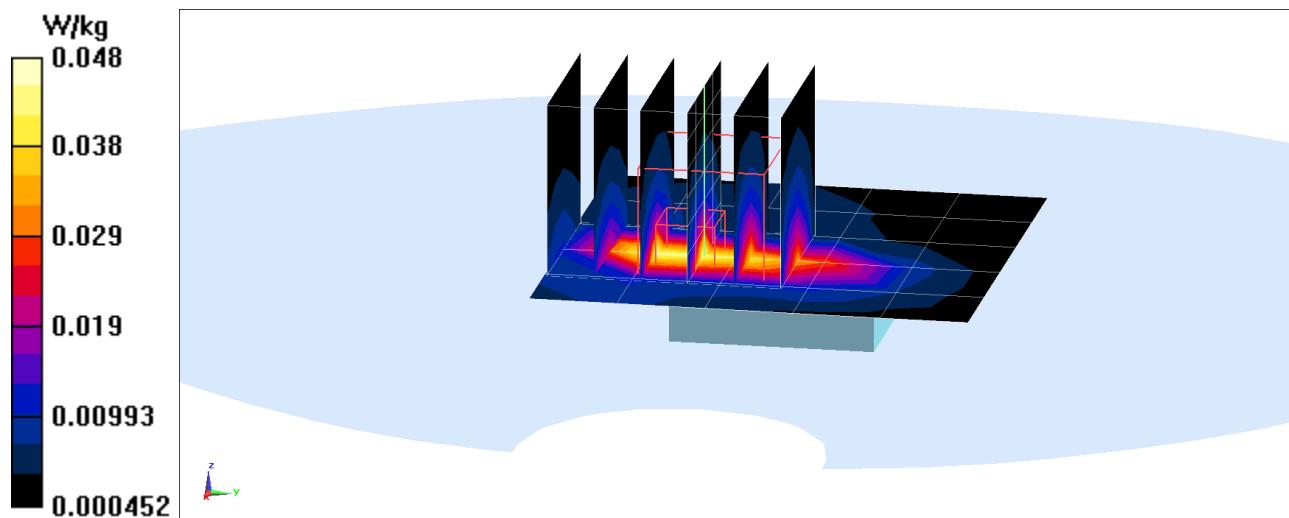

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00HJ77R

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 850 Body Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 1.007$ S/m; $\epsilon_r = 54.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-04-2017; Ambient Temp: 21.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7420; ConvF(9.73, 9.73, 9.73); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Extremity SAR, Back side, Mid.ch, 10 MHz Bandwidth
QPSK, 1 RB, 25 RB Offset, Ceramic, Sport wrist band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.797 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(10 g) = 0.015 W/kg

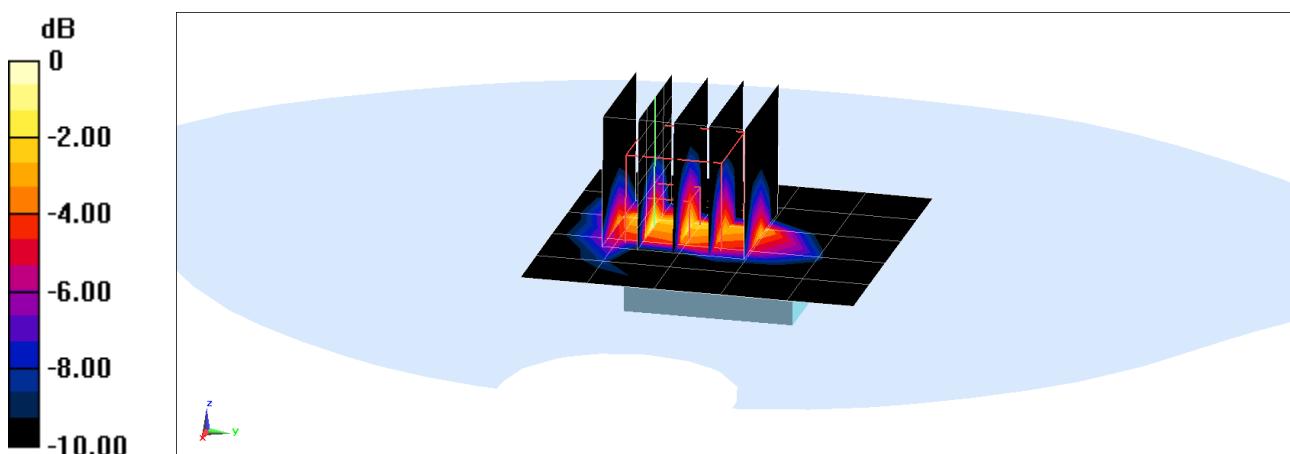

0 dB = 0.0524 W/kg = -12.81 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT008J77R


Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1732.5$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-03-2017; Ambient Temp: 20.2°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7420; ConvF(8.05, 8.05, 8.05); Calibrated: 11/15/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/21/2016
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Extremity SAR, Back side, Mid.ch, 20 MHz Bandwidth
QPSK, 1 RB, 99 RB Offset, Ceramic, Metal Loop wrist band**

Area Scan (5x5x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.74 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.400 W/kg
SAR(10 g) = 0.112 W/kg

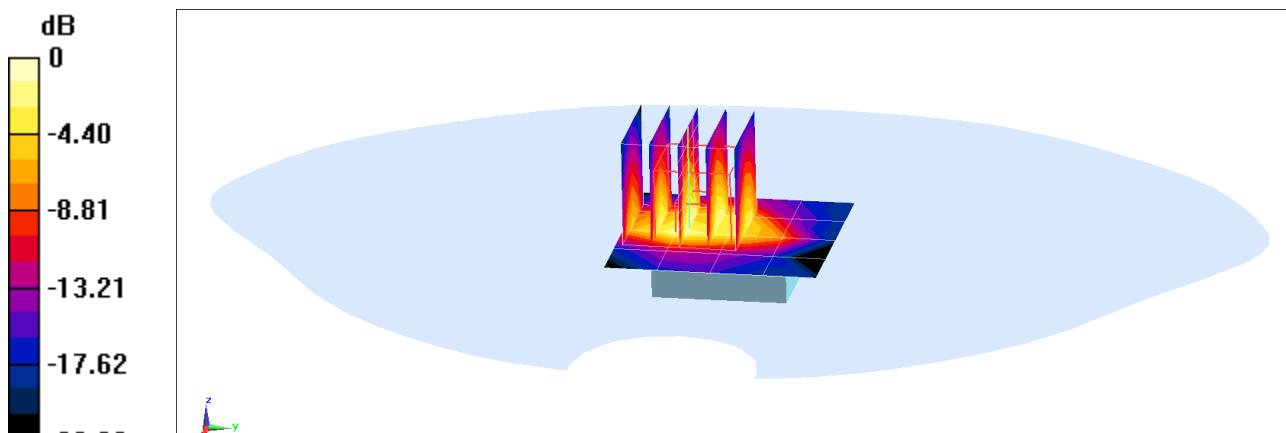

0 dB = 0.337 W/kg = -4.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT008J77R

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 51.479$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-19-2017; Ambient Temp: 19.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7420; ConvF(7.79, 7.79, 7.79); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 25 (PCS), Extremity SAR, Back side, Low.ch, 20 MHz Bandwidth QPSK, 1 RB, 99 RB Offset, Ceramic, Metal Loop wrist band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.78 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(10 g) = 0.104 W/kg

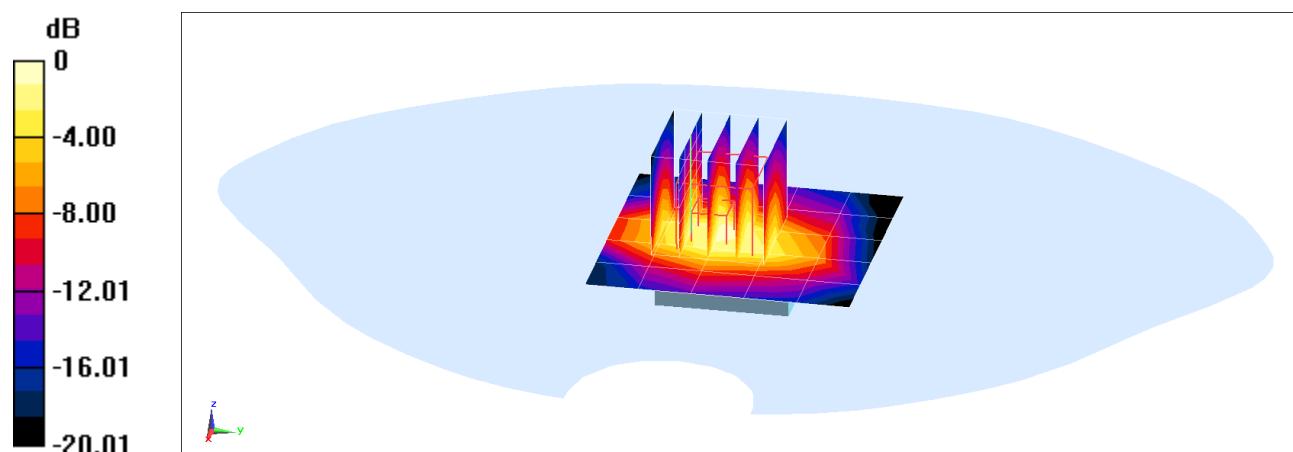

0 dB = 0.286 W/kg = -5.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00CJ768

Communication System: UID 0, LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2506$ MHz; $\sigma = 2.033$ S/m; $\epsilon_r = 51.418$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-19-2017; Ambient Temp: 21.7°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3329; ConvF(4.57, 4.57, 4.57); Calibrated: 03/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 03/10/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1873

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 41, Extremity SAR, Back side, Low.ch, 20 MHz Bandwidth QPSK, 1 RB, 99 RB Offset, Aluminum, Sport wrist band


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.731 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(10 g) = 0.030 W/kg

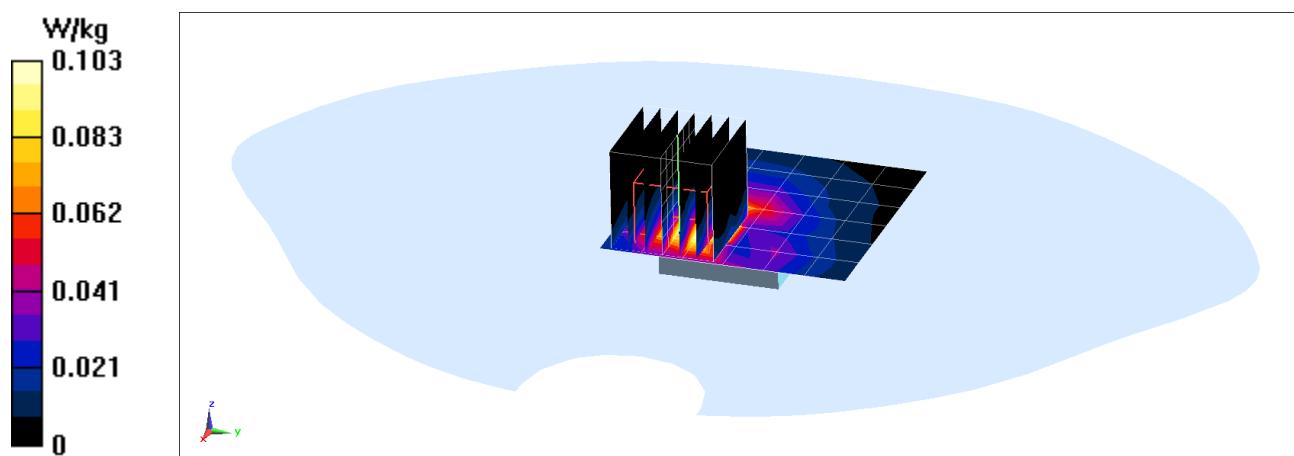

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT00GJ768

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437$ MHz; $\sigma = 2.005$ S/m; $\epsilon_r = 52.226$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-29-2017; Ambient Temp: 19.7°C; Tissue Temp: 20.4°C

Probe: ES3DV3 - SN3347; ConvF(4.53, 4.53, 4.53); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Extremity SAR
Ch 6, 1 Mbps, Back Side, Aluminum, Sport wrist band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.438 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(10 g) = 0.028 W/kg

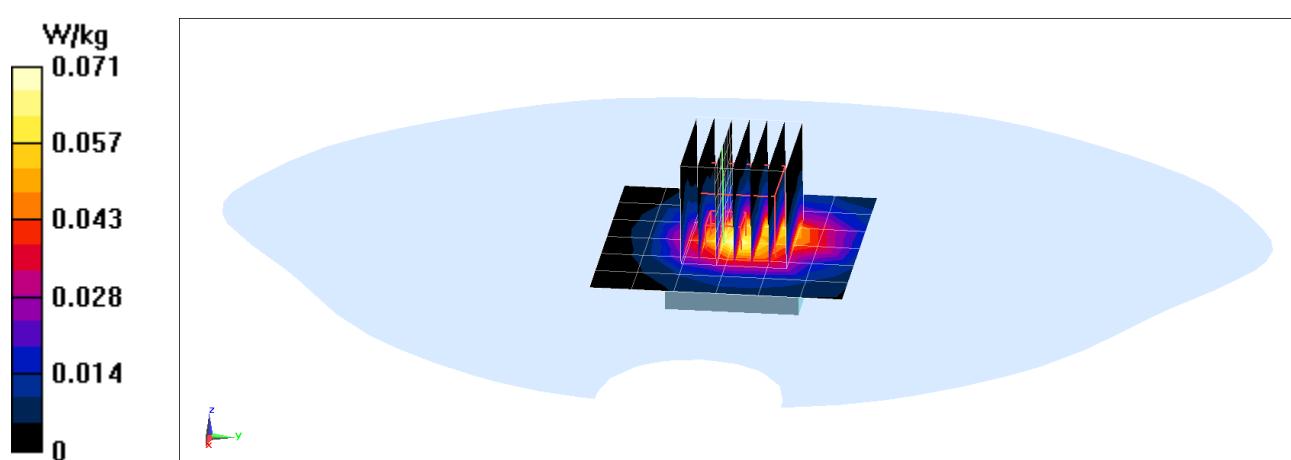

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT007J768

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 50.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-06-2017; Ambient Temp: 20.8°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3347; ConvF(4.53, 4.53, 4.53); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth (ePA), Extremity SAR, Ch 39, 1 Mbps
Back Side, Aluminum, Sport wrist band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.620 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(10 g) = 0.034 W/kg

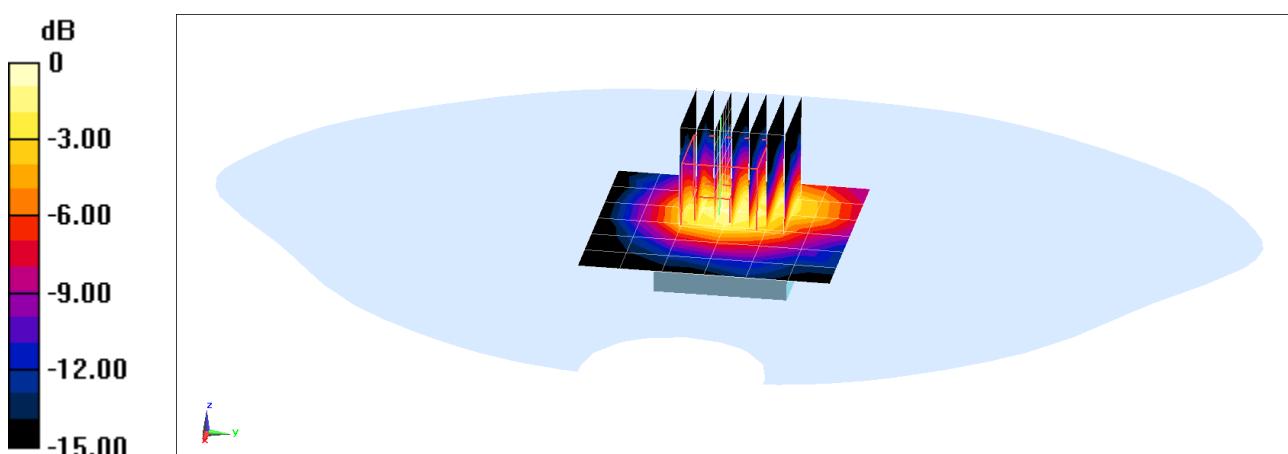

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A1860; Type: Watch; Serial: FH7TT007J768

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 52.669$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-14-2017; Ambient Temp: 20.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7420; ConvF(7.45, 7.45, 7.45); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth (iPA), Extremity SAR, Ch 39, 1 Mbps
Back Side, Aluminum, Sport wrist band**


Area Scan (6x6x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.135 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(10 g) = 0.00792 W/kg

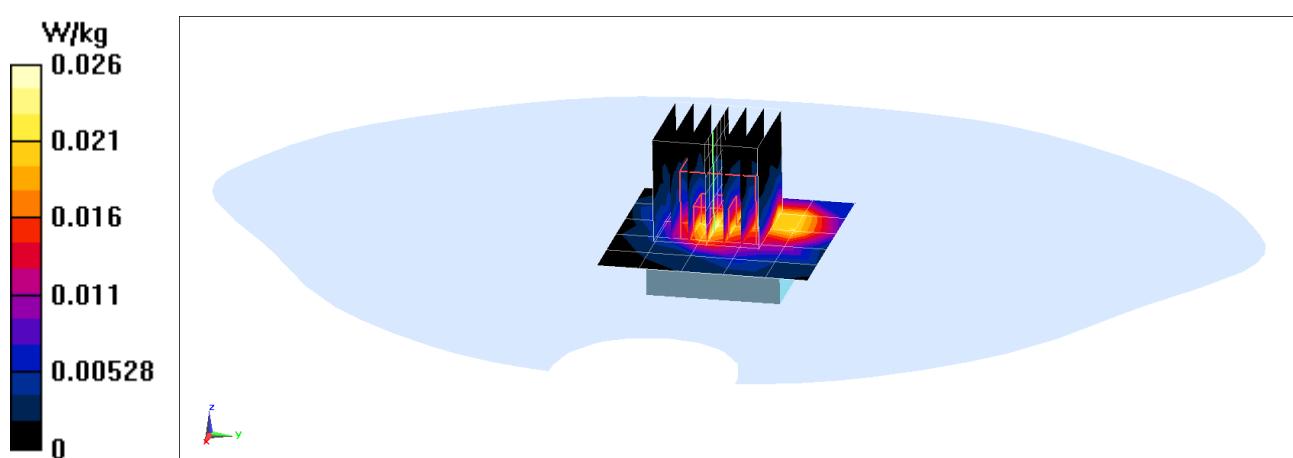

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1097


Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 750 \text{ MHz}$; $\sigma = 0.892 \text{ S/m}$; $\epsilon_r = 40.869$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-26-2017; Ambient Temp: 19.1°C; Tissue Temp: 19.6°C

Probe: ES3DV3 - SN3347; ConvF(6.75, 6.75, 6.75); Calibrated: 11/11/2016;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1450; Calibrated: 11/15/2016
Phantom: SAM with CRP; Type: SAM; Serial: TP:1792
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Peak SAR (extrapolated) = 2.48 W/kg
SAR(1 g) = 1.69 W/kg
Deviation(1 g) = 2.80%

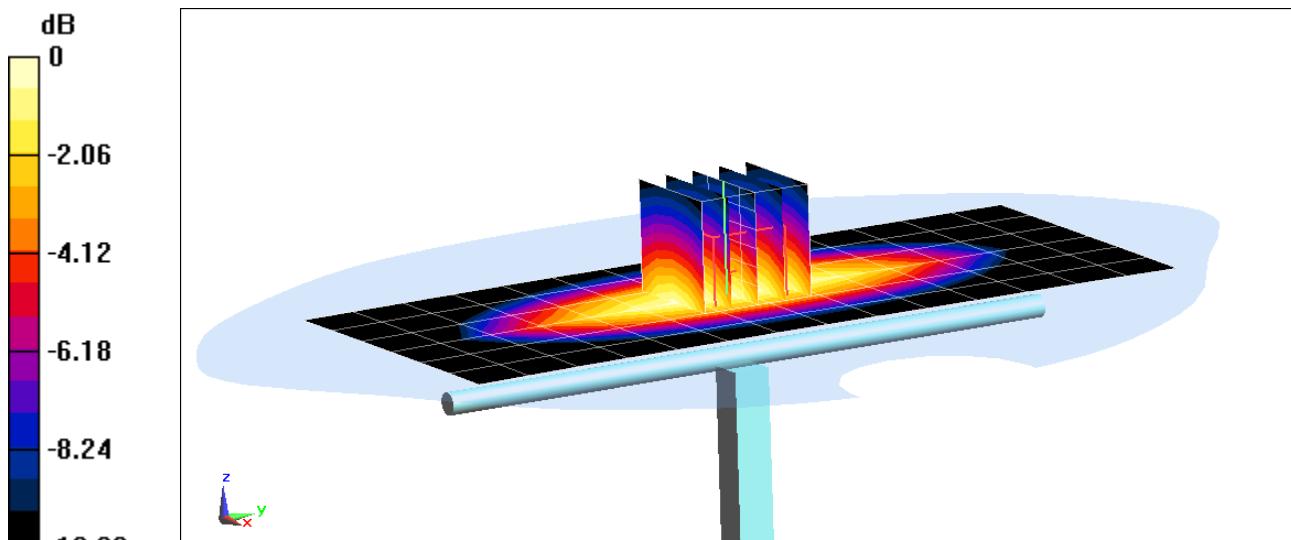

$0 \text{ dB} = 1.98 \text{ W/kg} = 2.97 \text{ dBW/kg}$

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1009

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 850 Head Medium parameters used:

$f = 850$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 40.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-26-2017; Ambient Temp: 19.5°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7420; ConvF(10.1, 10.1, 10.1); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.12 W/kg

Deviation(1 g) = 4.95%

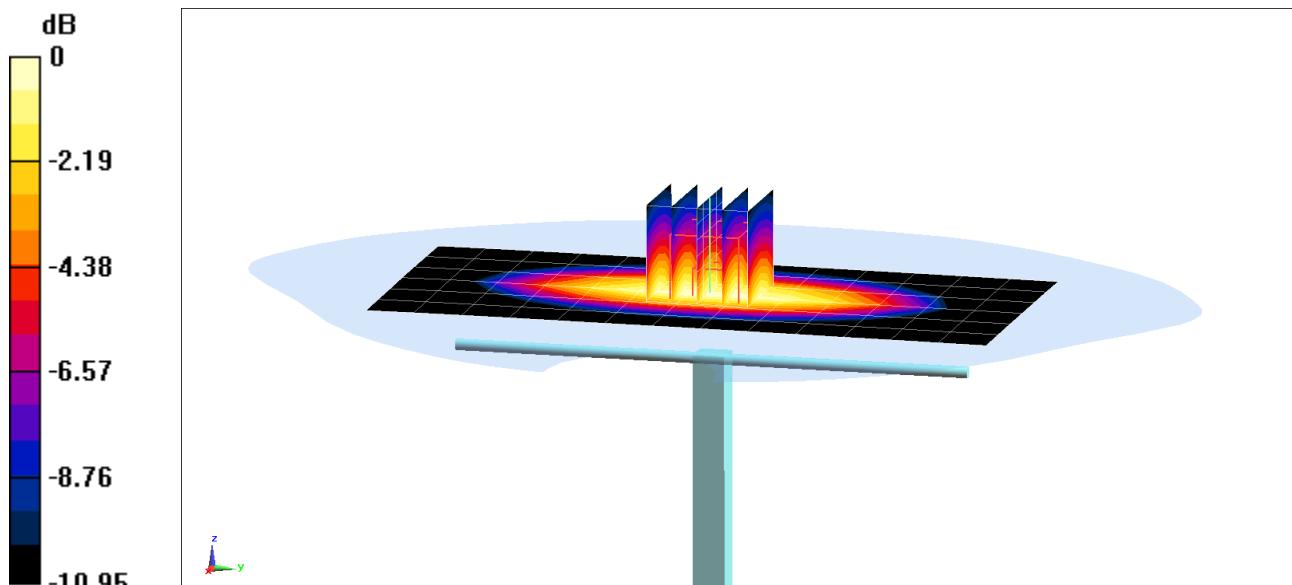

0 dB = 2.80 W/kg = 4.47 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1010

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 850 Head Medium parameters used:

$f = 850$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 42.739$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-18-2017; Ambient Temp: 20.7°C; Tissue Temp: 19.5°C

Probe: ES3DV3 - SN3118; ConvF(6.32, 6.32, 6.32); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.04 W/kg

Deviation(1 g) = 5.37%

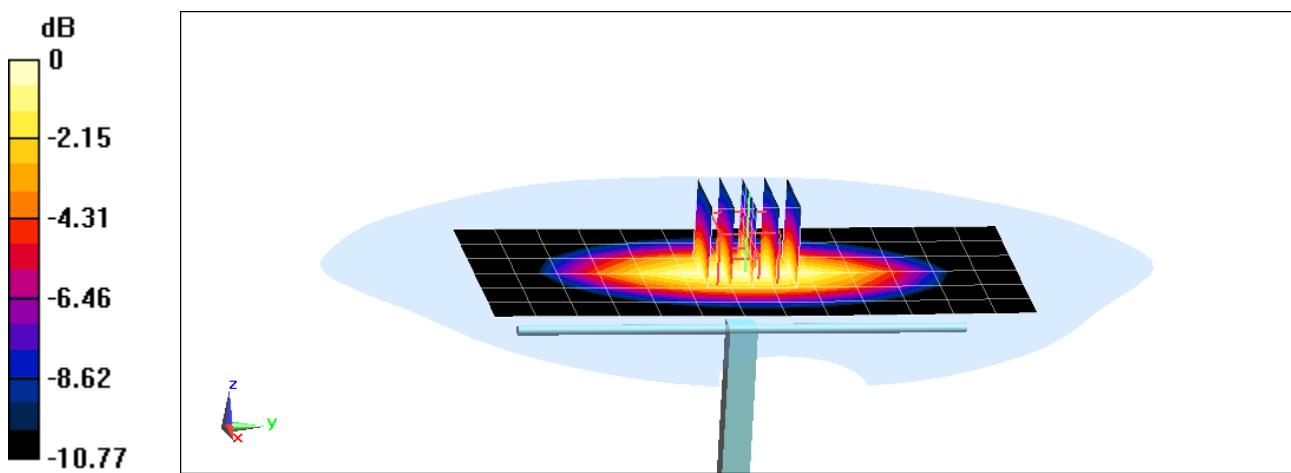

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1104

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used:
 $f = 1750$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2017; Ambient Temp: 22.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3118; ConvF(5.21, 5.21, 5.21); Calibrated: 03/16/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1213; Calibrated: 03/08/2017
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.52 W/kg

SAR(1 g) = 3.57 W/kg

Deviation(1 g) = -0.83%

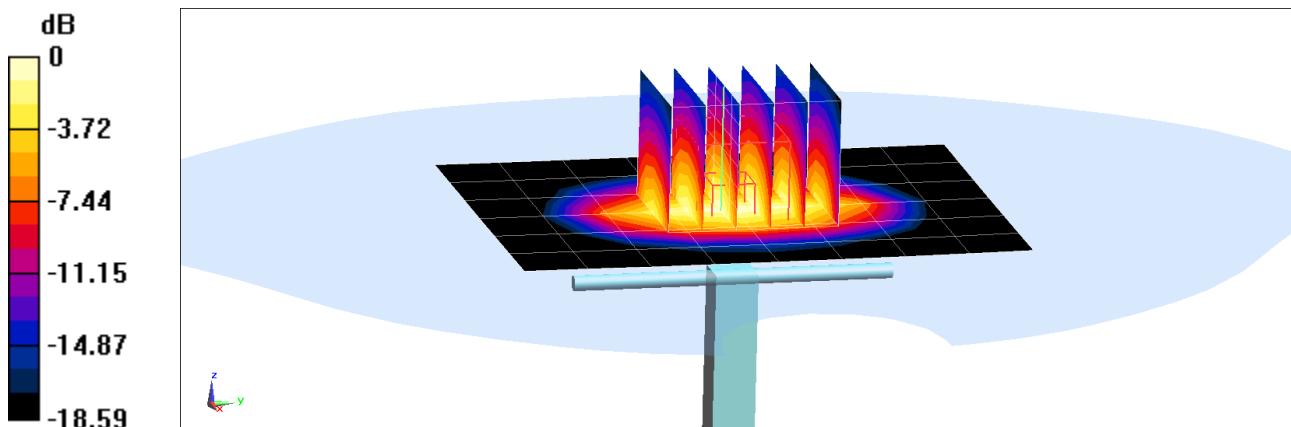

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1104

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used:
 $f = 1750$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 39.149$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2017; Ambient Temp: 20.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7420; ConvF(8.5, 8.5, 8.5); Calibrated: 11/15/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.03 W/kg

SAR(1 g) = 3.63 W/kg

Deviation(1 g) = 0.83%

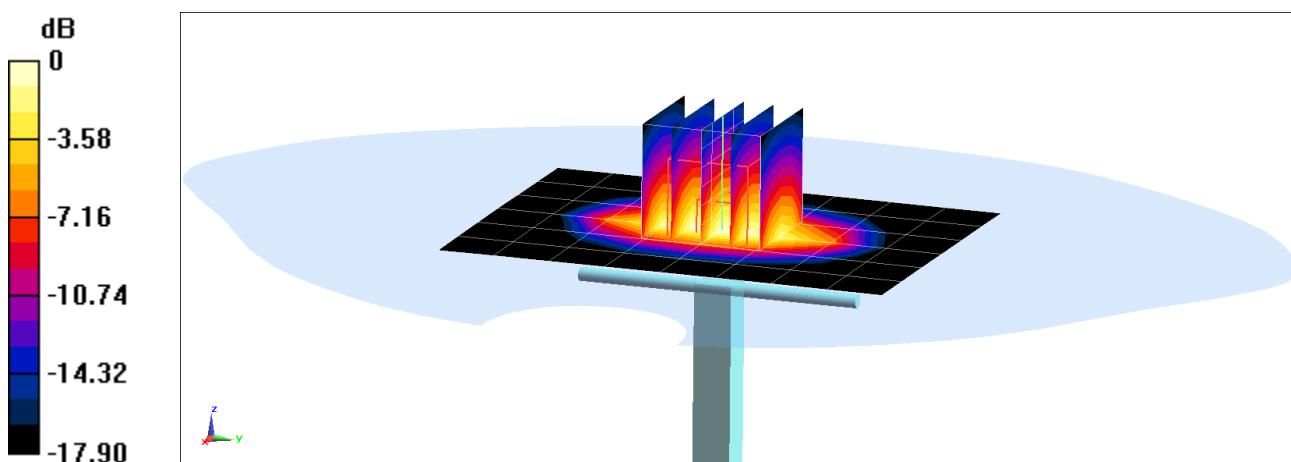

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d180

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 39.833$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-20-2017; Ambient Temp: 20.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3118; ConvF(5.05, 5.05, 5.05); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.73 W/kg

SAR(1 g) = 4.07 W/kg

Deviation(1 g) = 0.49%

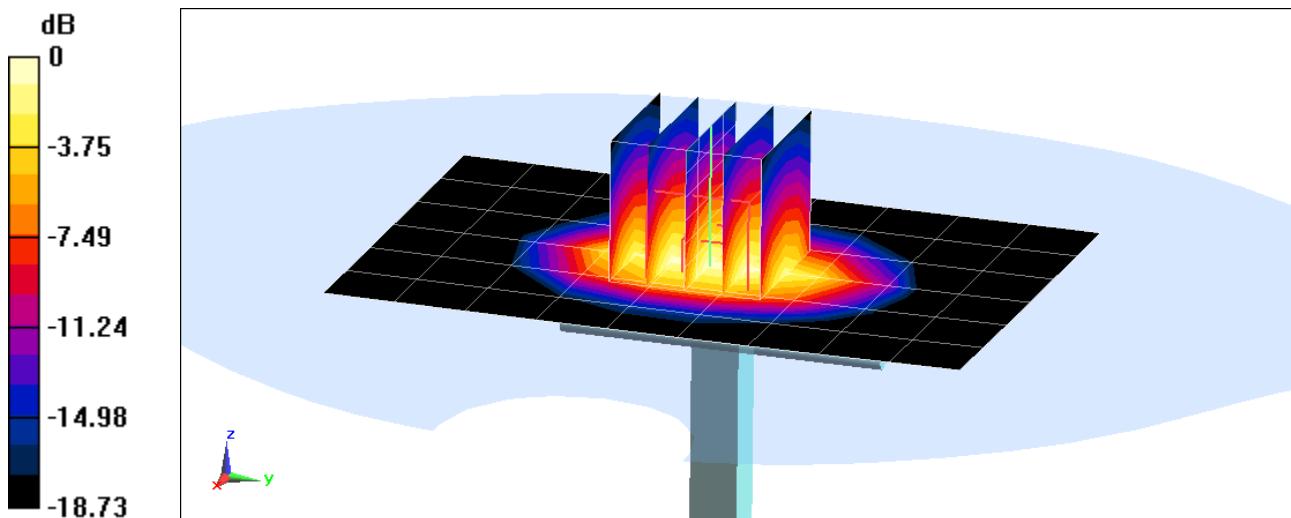

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d181

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 38.681$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-22-2017; Ambient Temp: 20.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3118; ConvF(5.05, 5.05, 5.05); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.93 W/kg

SAR(1 g) = 4.17 W/kg

Deviation(1 g) = 5.04%

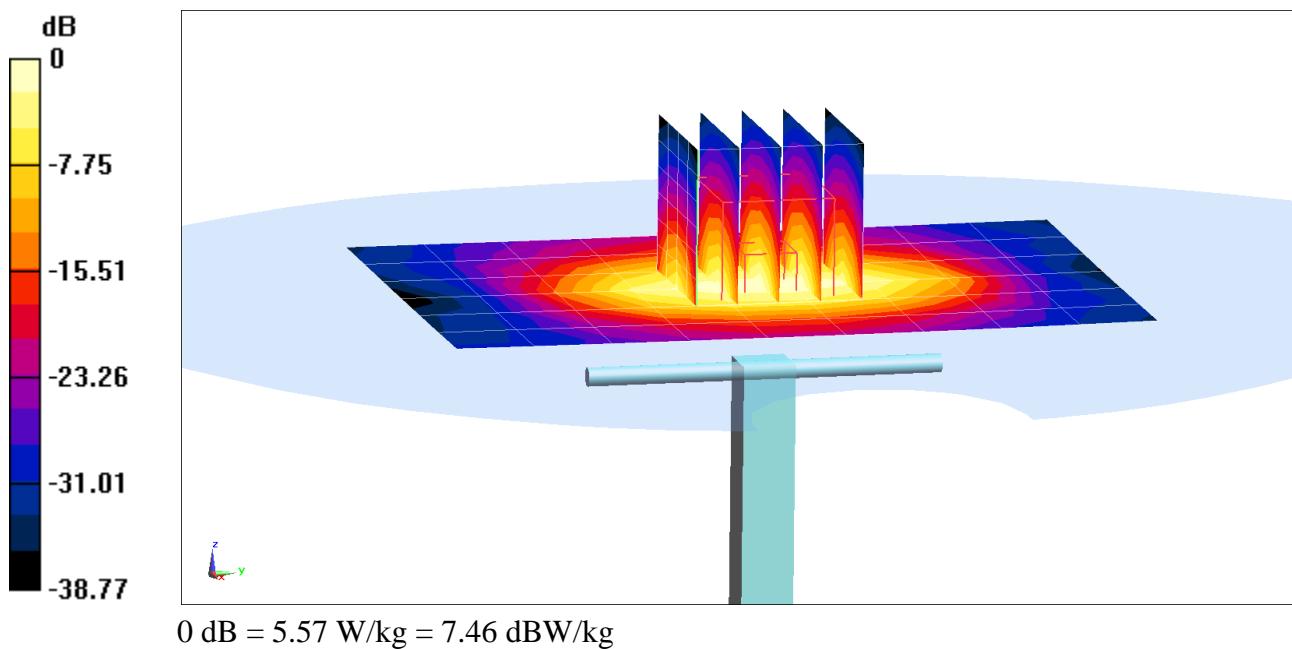

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 39.507$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-03-2017; Ambient Temp: 21.7°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3118; ConvF(4.37, 4.37, 4.37); Calibrated: 03/16/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1213; Calibrated: 03/08/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1868

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.27 W/kg

Deviation(1 g) = 1.15%

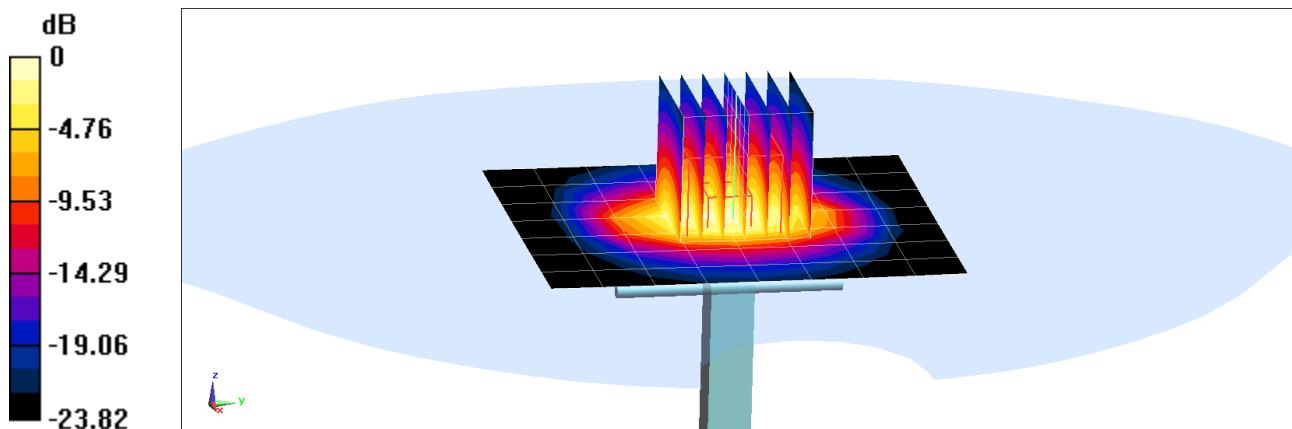

0 dB = 6.99 W/kg = 8.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 39.519$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-13-2017; Ambient Temp: 23.1°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3347; ConvF(4.67, 4.67, 4.67); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.09 W/kg

Deviation (1 g) = -2.30%

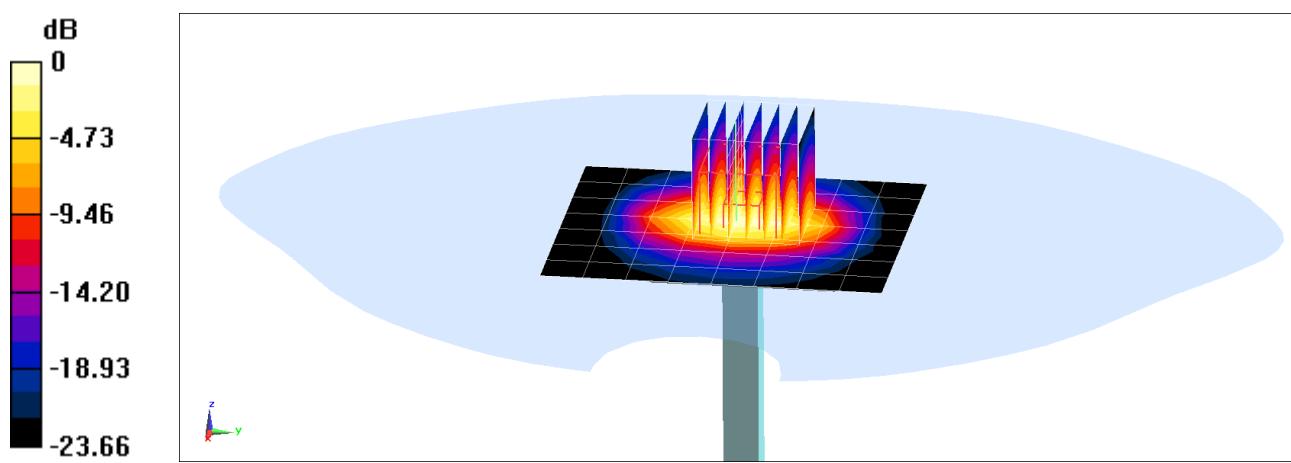

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1097

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.489$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-22-2017; Ambient Temp: 19.3°C; Tissue Temp: 20.2°C

Probe: ES3DV3 - SN3347; ConvF(6.47, 6.47, 6.47); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.51 W/kg

SAR(10 g) = 1.14 W/kg

Deviation(10 g) = 0.18%

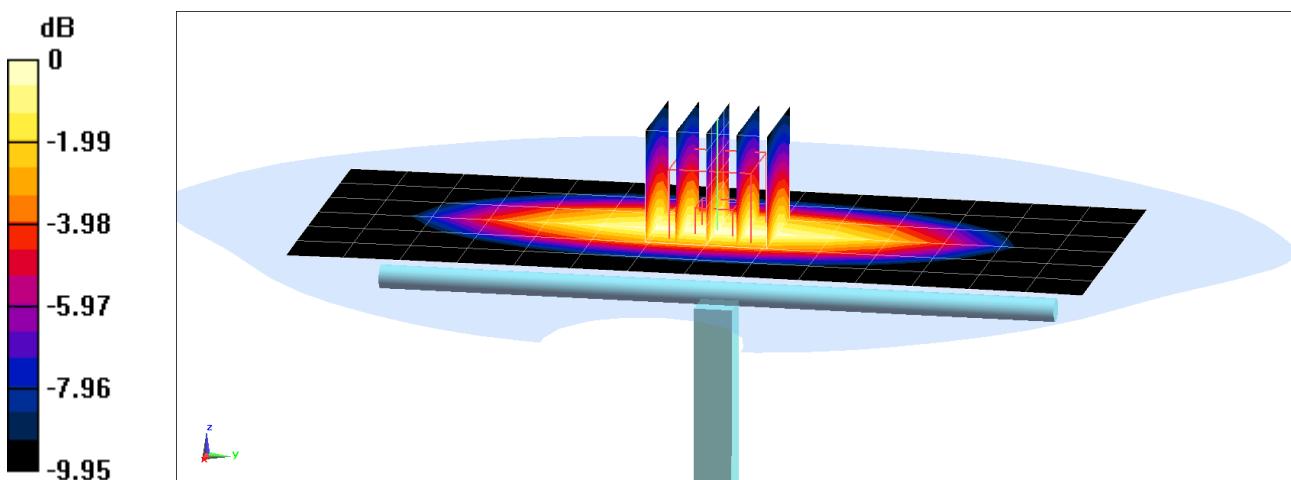

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1009

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 850 Body Medium parameters used:

$f = 850$ MHz; $\sigma = 1.023$ S/m; $\epsilon_r = 54.779$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-21-2017; Ambient Temp: 20.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7420; ConvF(9.73, 9.73, 9.73); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.20 W/kg

SAR(10 g) = 1.37 W/kg

Deviation(10 g) = 6.53%

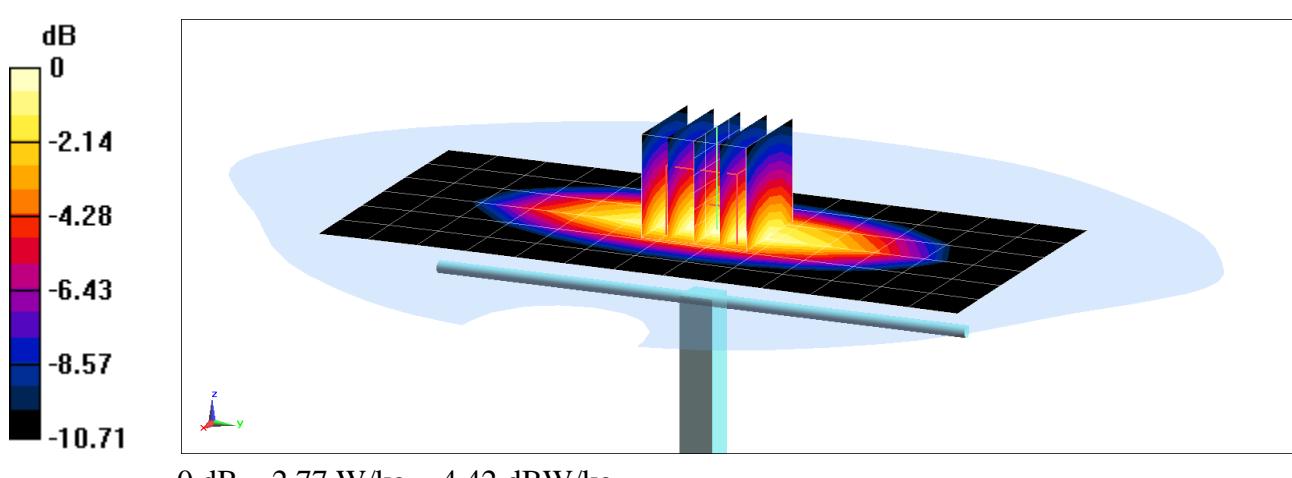

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1010

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 850 Body Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 1.014 \text{ S/m}$; $\epsilon_r = 55.089$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-21-2017; Ambient Temp: 19.9°C; Tissue Temp: 19.4°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 03/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 03/10/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1873

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.08 W/kg

SAR(10 g) = 1.38 W/kg

Deviation(10 g) = 5.02%

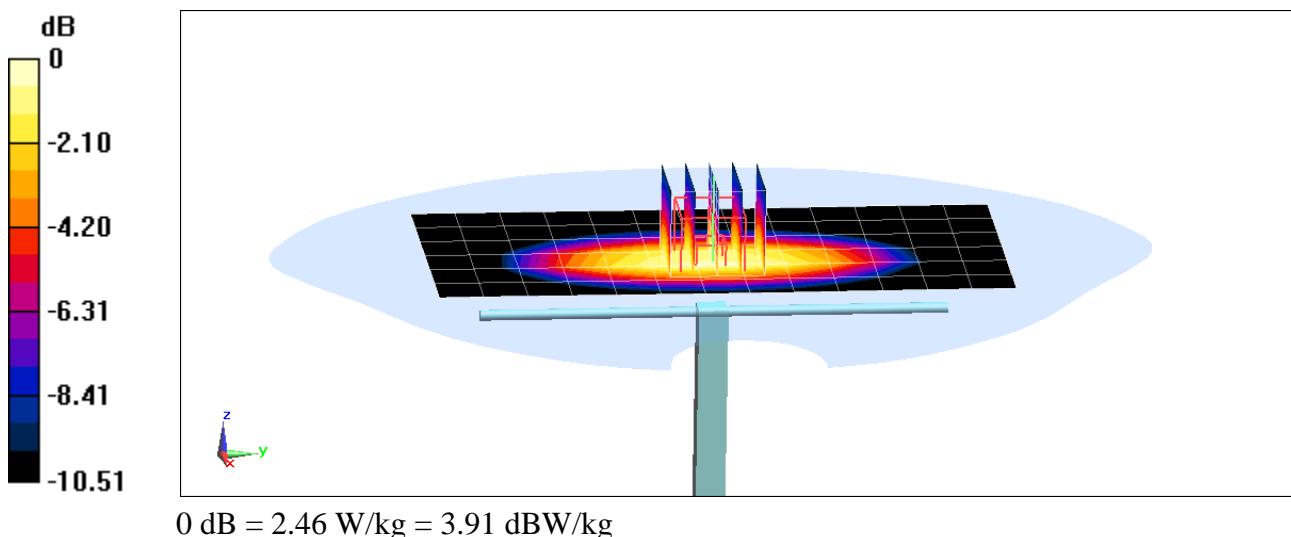

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1104


Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used:
 $f = 1750 \text{ MHz}$; $\sigma = 1.532 \text{ S/m}$; $\epsilon_r = 52.612$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-03-2017; Ambient Temp: 20.2°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7420; ConvF(8.05, 8.05, 8.05); Calibrated: 11/15/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/21/2016
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Peak SAR (extrapolated) = 6.81 W/kg
SAR(10 g) = 1.95 W/kg
Deviation(10 g) = 1.04%

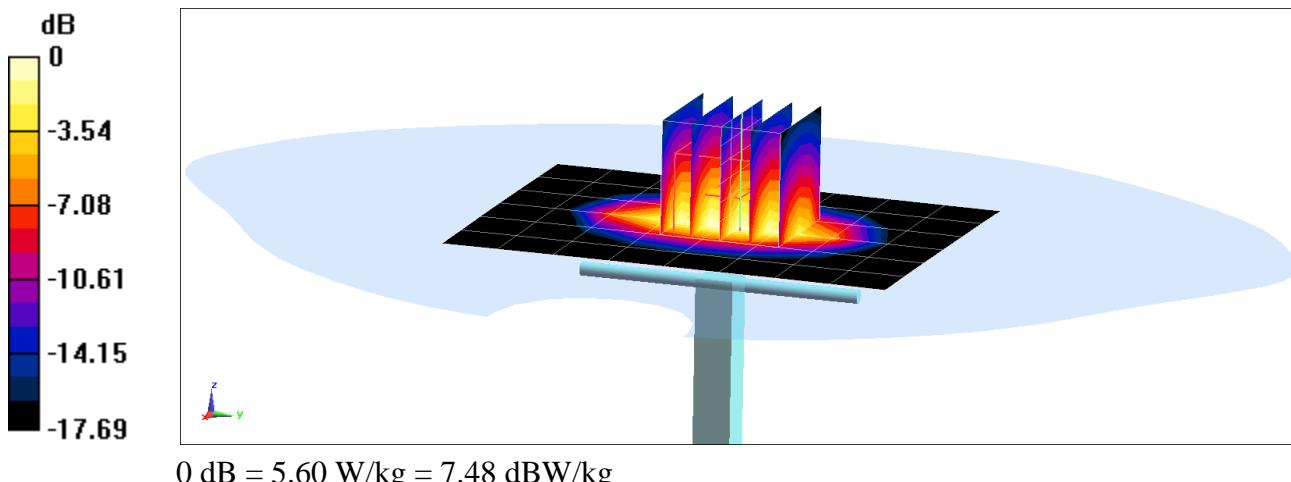

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d181

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.553$ S/m; $\epsilon_r = 51.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-19-2017; Ambient Temp: 19.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7420; ConvF(7.79, 7.79, 7.79); Calibrated: 11/15/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/21/2016

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.48 W/kg

SAR(10 g) = 2.04 W/kg

Deviation(10 g) = -2.39%

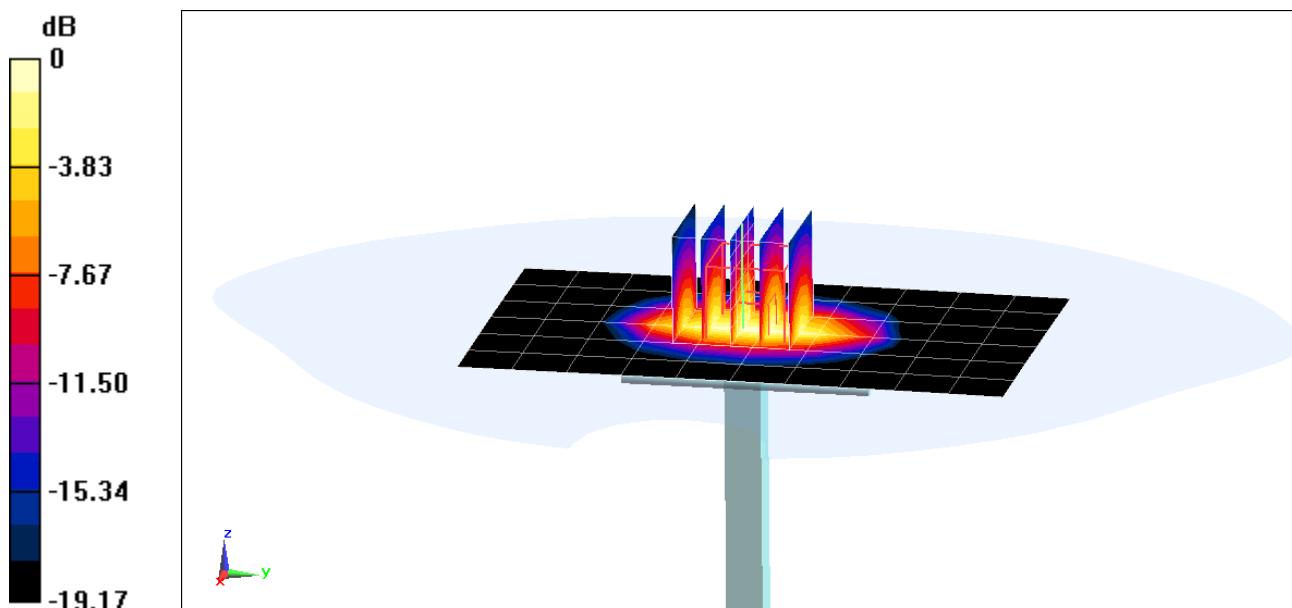

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 51.593$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-19-2017; Ambient Temp: 21.7°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3329; ConvF(4.57, 4.57, 4.57); Calibrated: 03/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 03/10/2017

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1873

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.9 W/kg

SAR(10 g) = 2.31 W/kg

Deviation(10 g) = -3.75%

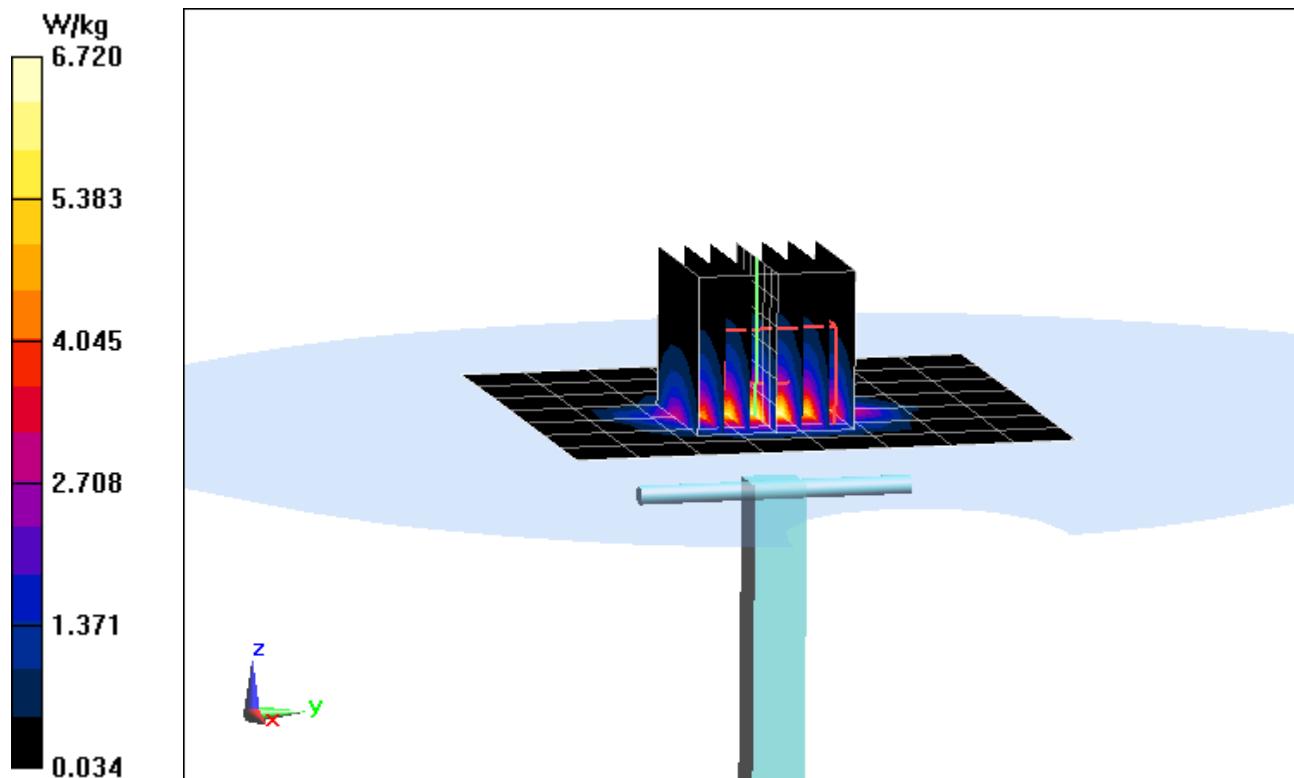

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.023 \text{ S/m}$; $\epsilon_r = 52.166$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-29-2017; Ambient Temp: 19.7°C; Tissue Temp: 20.4°C

Probe: ES3DV3 - SN3347; ConvF(4.53, 4.53, 4.53); Calibrated: 11/11/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/15/2016

Phantom: SAM with CRP; Type: SAM; Serial: TP:1792

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.8 W/kg

SAR(10 g) = 2.26 W/kg

Deviation(10 g) = -5.83%

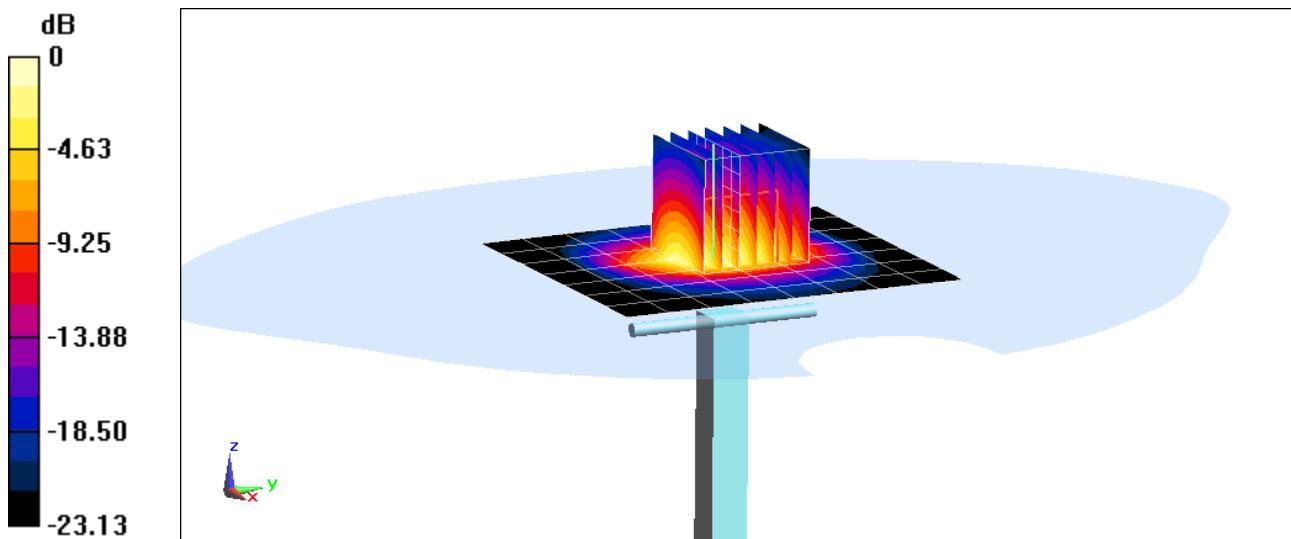

0 dB = 6.60 W/kg = 8.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used:
 $f = 2450$ MHz; $\sigma = 2.002$ S/m; $\epsilon_r = 52.628$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-14-2017; Ambient Temp: 20.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7420; ConvF(7.45, 7.45, 7.45); Calibrated: 11/15/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/21/2016
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1793
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 11.2 W/kg
SAR(10 g) = 2.44 W/kg
Deviation(10 g) = 1.67%

