



CERTIFICATION TEST REPORT

Report Number. : 12458150-E1V4

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2031

FCC ID : BCG-A2031

IC : 579C-A2031

EUT Description : BLUETOOTH EARBUD

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:
March 21, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	12/11/2018	Initial Issue	Joe Vang
V2	02/07/2019	Updated EUT name and phone #	Chin Pang
V3	02/11/2019	Updated Client's Request Section 8.4 & 8.5	Tony Li
V4	03/21/2019	Corrected model number for Support Equipment Charger case	Chin Pang

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE	8
5.5. WORST-CASE CONFIGURATION AND MODE	8
5.6. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	14
7. MEASUREMENT METHOD	15
8. ANTENNA PORT TEST RESULTS	16
8.1. ON TIME AND DUTY CYCLE	16
8.2. 99% BANDWIDTH	18
8.2.1. BLE (1Mbps)	19
8.2.2. BLE (2Mbps)	20
8.3. 6 dB BANDWIDTH	21
8.3.1. BLE (1Mbps)	22
8.3.2. BLE (2Mbps)	23
8.4. OUTPUT POWER	24
8.4.1. BLE (1Mbps)	25
8.4.2. BLE (2Mbps)	25
8.5. AVERAGE POWER	26
8.5.1. BLE (1Mbps)	27
8.5.2. BLE (2Mbps)	27
8.6. POWER SPECTRAL DENSITY	28
8.6.1. BLE (1Mbps)	29

8.6.2.	BLE (2Mbps).....	30
8.7.	CONDUCTED SPURIOUS EMISSIONS.....	31
8.7.1.	BLE (1Mbps).....	32
8.7.2.	BLE (2Mbps).....	33
9.	RADIATED TEST RESULTS.....	34
9.1.	LIMITS AND PROCEDURE.....	34
9.2.	TRANSMITTER ABOVE 1 GHz.....	35
9.2.1.	BLE (1Mbps).....	35
9.2.2.	BLE (2Mbps).....	45
9.3.	Worst Case Below 1 GHz.....	55
9.4.	Worst Case 18-26 GHz.....	57
10.	AC POWER LINE CONDUCTED EMISSIONS.....	59
10.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE.....	60
10.2.	EUT POWERED BY HOST PC VIA USB CABLE.....	62
11.	SETUP PHOTOS.....	64

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: BLUETOOTH EARBUD

MODEL: A2031

SERIAL NUMBER: GFHX60LFJJNV

DATE TESTED: AUGUST 15, 2018 – DECEMBER 10, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
CONSUMER TECHNOLOGY DIVISION
Senior Engineer
UL Verification Services Inc.

Prepared By:



Francisco Guarnero
CONSUMER TECHNOLOGY DIVISION
PROJECT ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v05, ANSI C63.10-2013, RSS-GEN Issue 5, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
☐ Chamber A (ISED:2324B-1)	☒ Chamber D (ISED:22541-1)	☐ Chamber K (ISED:2324A-1)
☐ Chamber B (ISED:2324B-2)	☒ Chamber E (ISED:22541-2)	☐ Chamber L (ISED:2324A-3)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	
	☐ Chamber G (ISED:22541-4)	
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED company address code 22541 with site numbers 22541 -1 through 22541-5, respectively. Chambers K and L are covered under ISED company address code 2324A with site numbers 2324A-1 and 2324A-3, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a Bluetooth earbud for the left ear. It has an integral battery, microphone and antenna. It can charge via bottom contacts with charging case. It is designed to work in conjunction with right earbud.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	9.88	9.73

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	Ant 1 (dBi)
2.4	-6.6

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 1A610.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y (landscape) orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y (landscape) orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	Macbook Pro	C02P41RZG086	FCC DoC
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
EUT AC Adapter	Apple	A1385	D292365CDYADHLHC3	NA
Charger Case	Apple	A1602	DLCWV47HJMMT	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
NA						


I/O CABLES (BELOW 1GHz AND AC POWER LINE TEST WITH ADAPTER AND LAPTOP)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

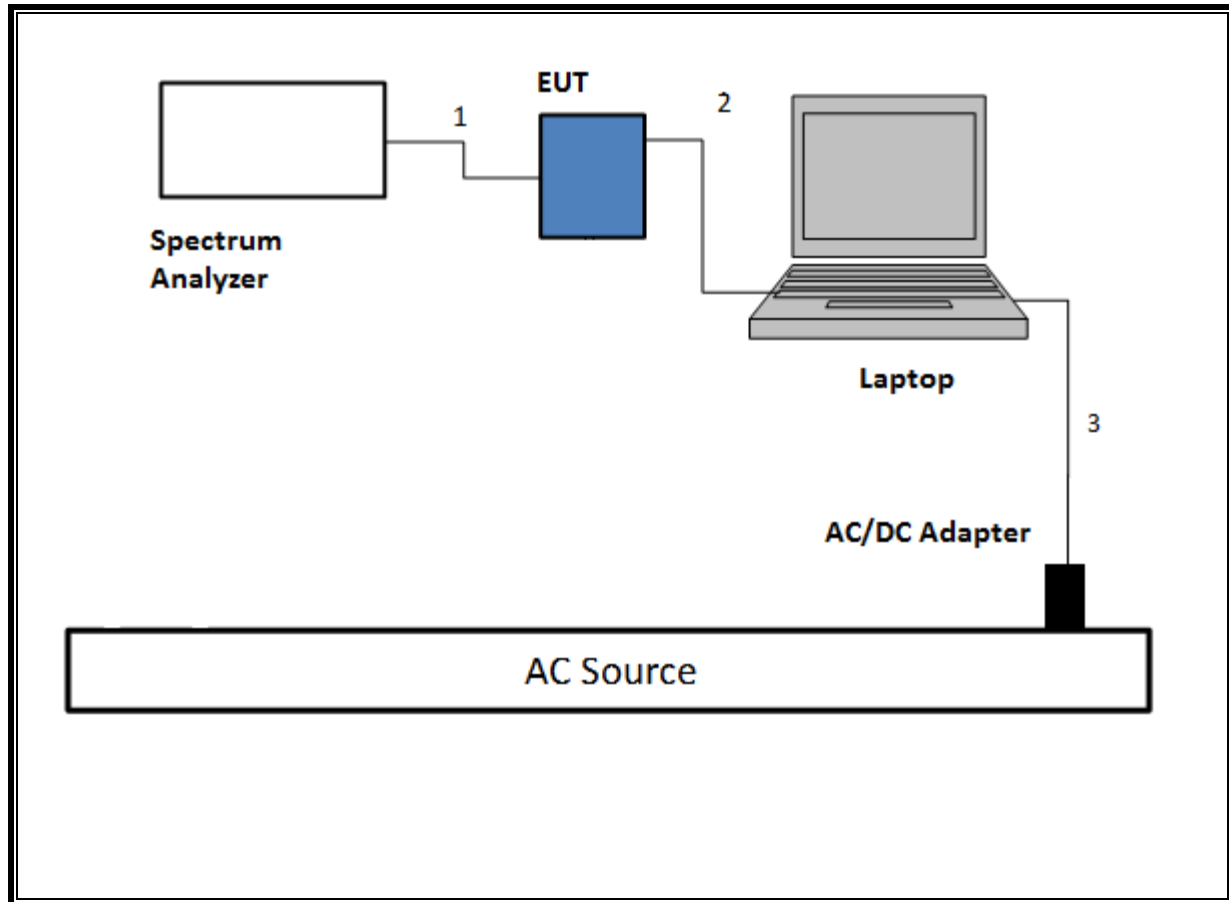


SETUP DIAGRAM FOR RADIATED TESTS ABOVE 1GHz

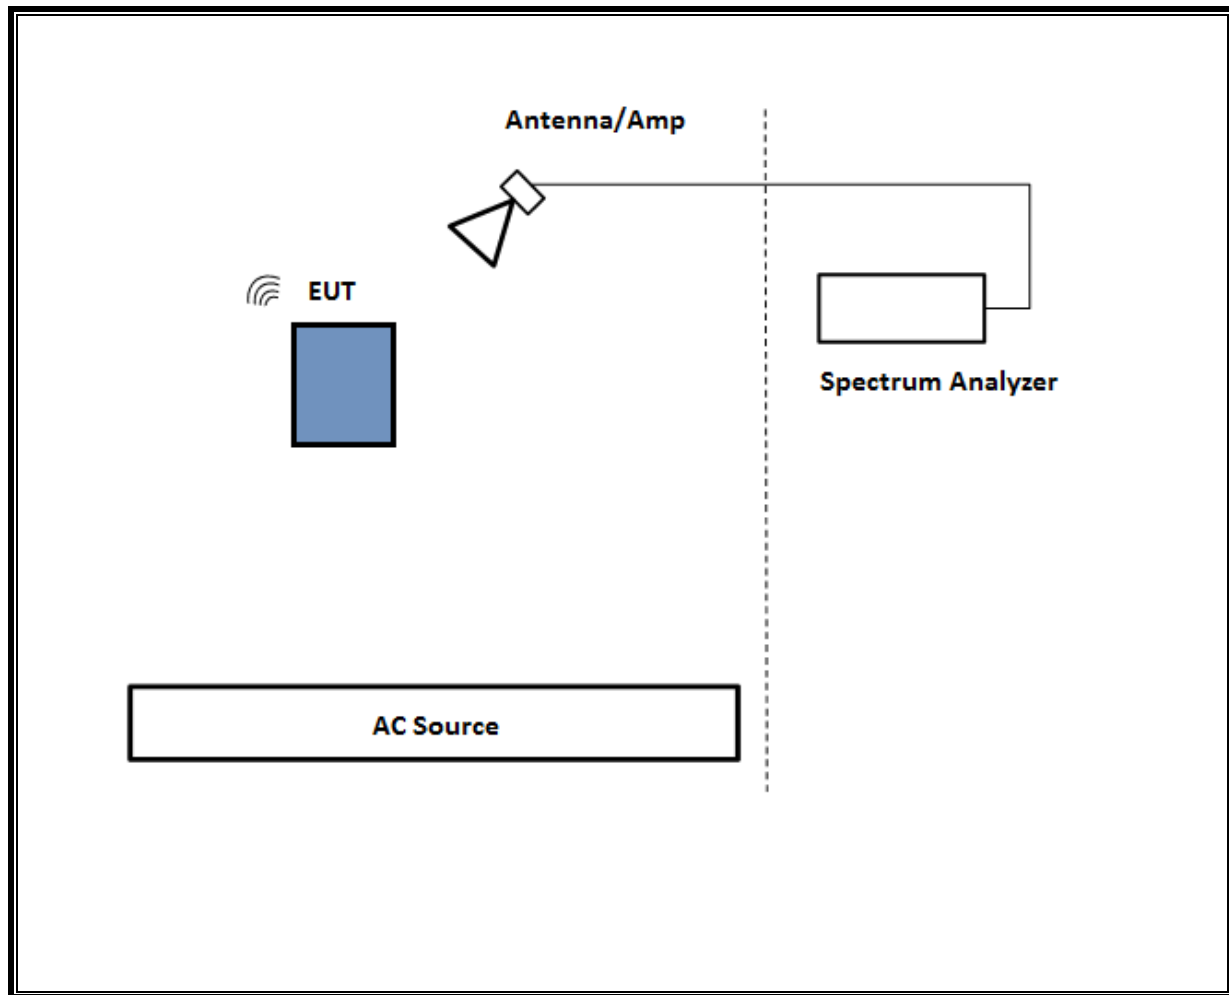

SETUP DIAGRAM FOR BELOW 1GHz and AC LINE CONDUCTED TEST

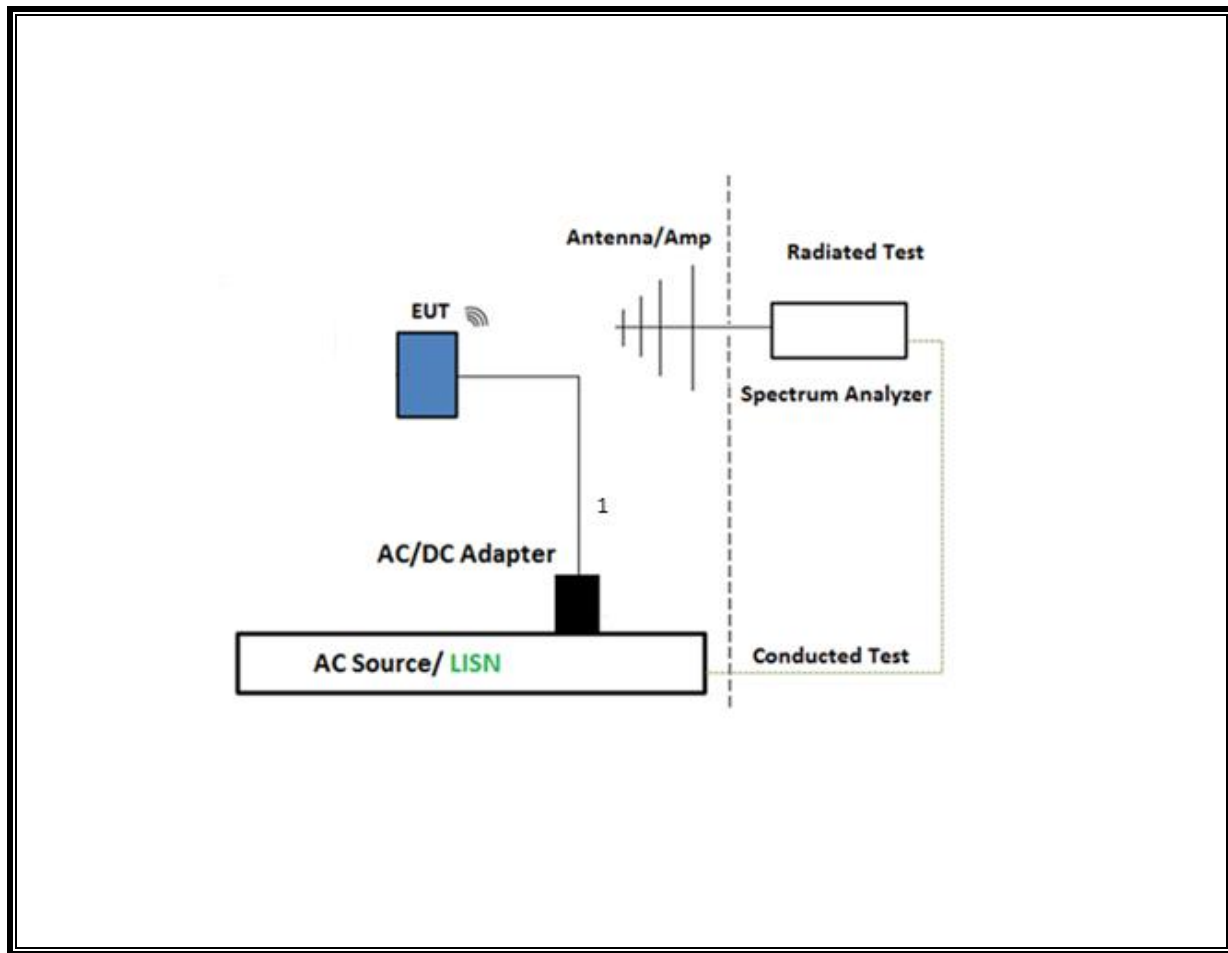

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

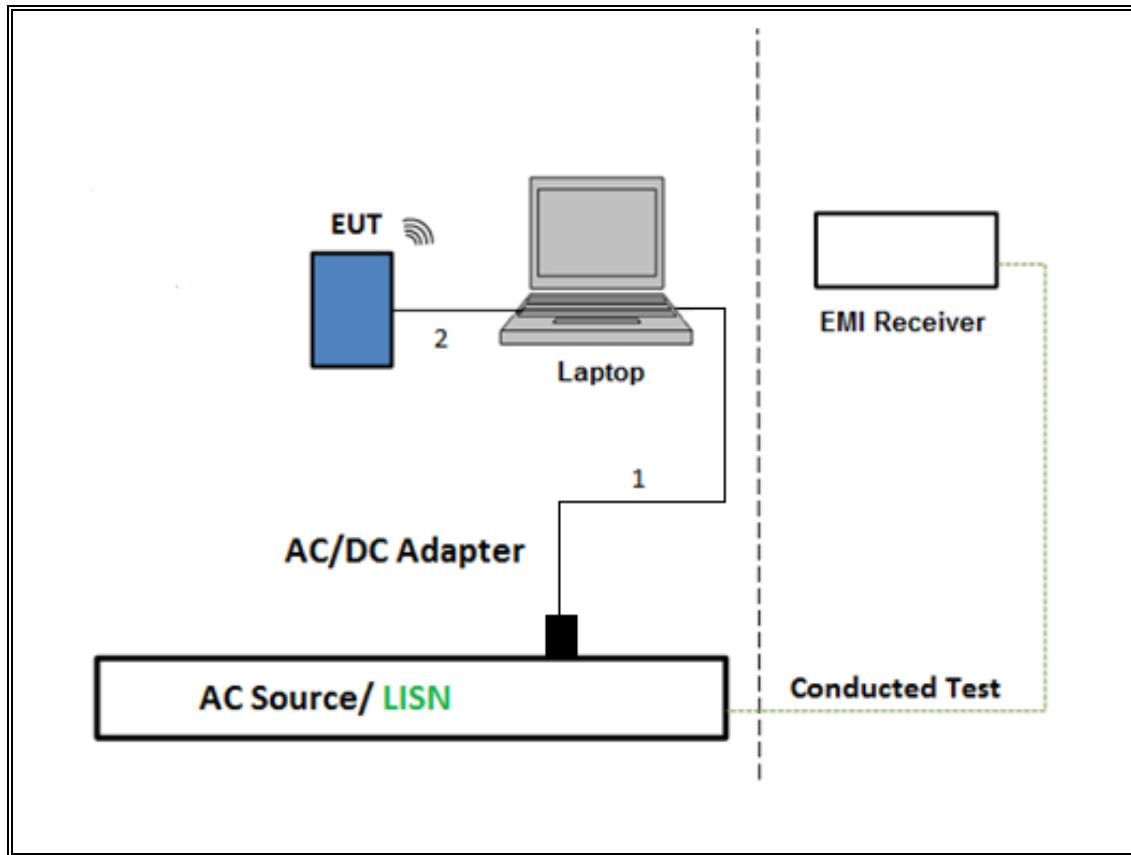

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID Num	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	04/03/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T477	07/24/2019
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T286	06/04/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T742	08/29/2019
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T341	09/26/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T712	02/08/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	07/24/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	138301	12/30/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T907	02/07/2019
Thermometer	Control Company	14-650-118, 15557603	T1816	01/11/2019
Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T89	01/18/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/2019
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	03/09/2019
True RMS Multi Meter	Fluke Corporation	87V	T360	04/30/2019
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	01/25/2019
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2019
**LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/19/2019
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v05, Section 6.

6 dB BW: KDB 558074 D01 v05, Section 8.1.

Output Power: KDB 558074 D01 v05, Section 9.1.3.

Power Spectral Density: KDB 558074 D01 v05, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v05, Section 12.1.

Band-edge: KDB 558074 D01 v05, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
BLE	100.000	100.000	1.000	100.00%	0.00	0.010

DUTY CYCLE PLOTS

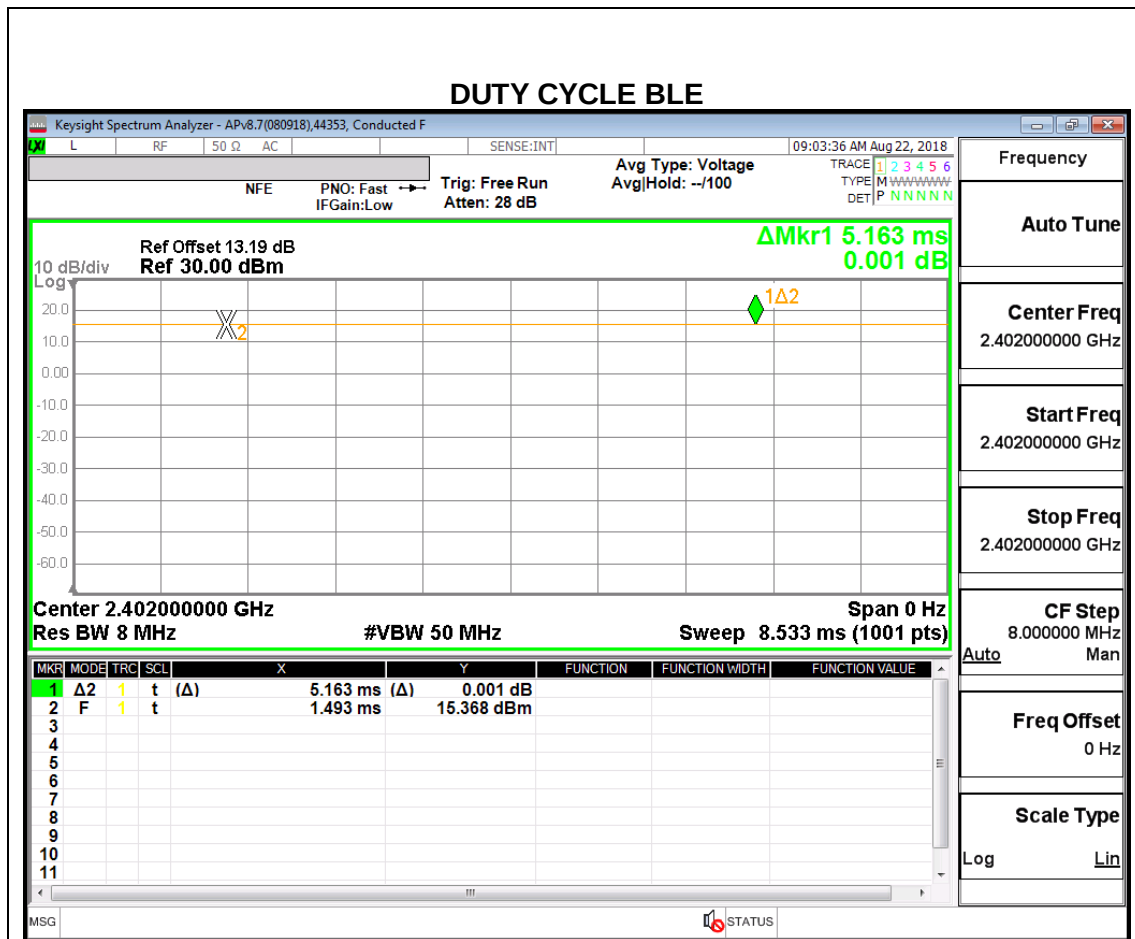

8.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS


8.2.1. BLE (1Mbps)

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0215
Middle	2440	1.0222
High	2480	1.0342

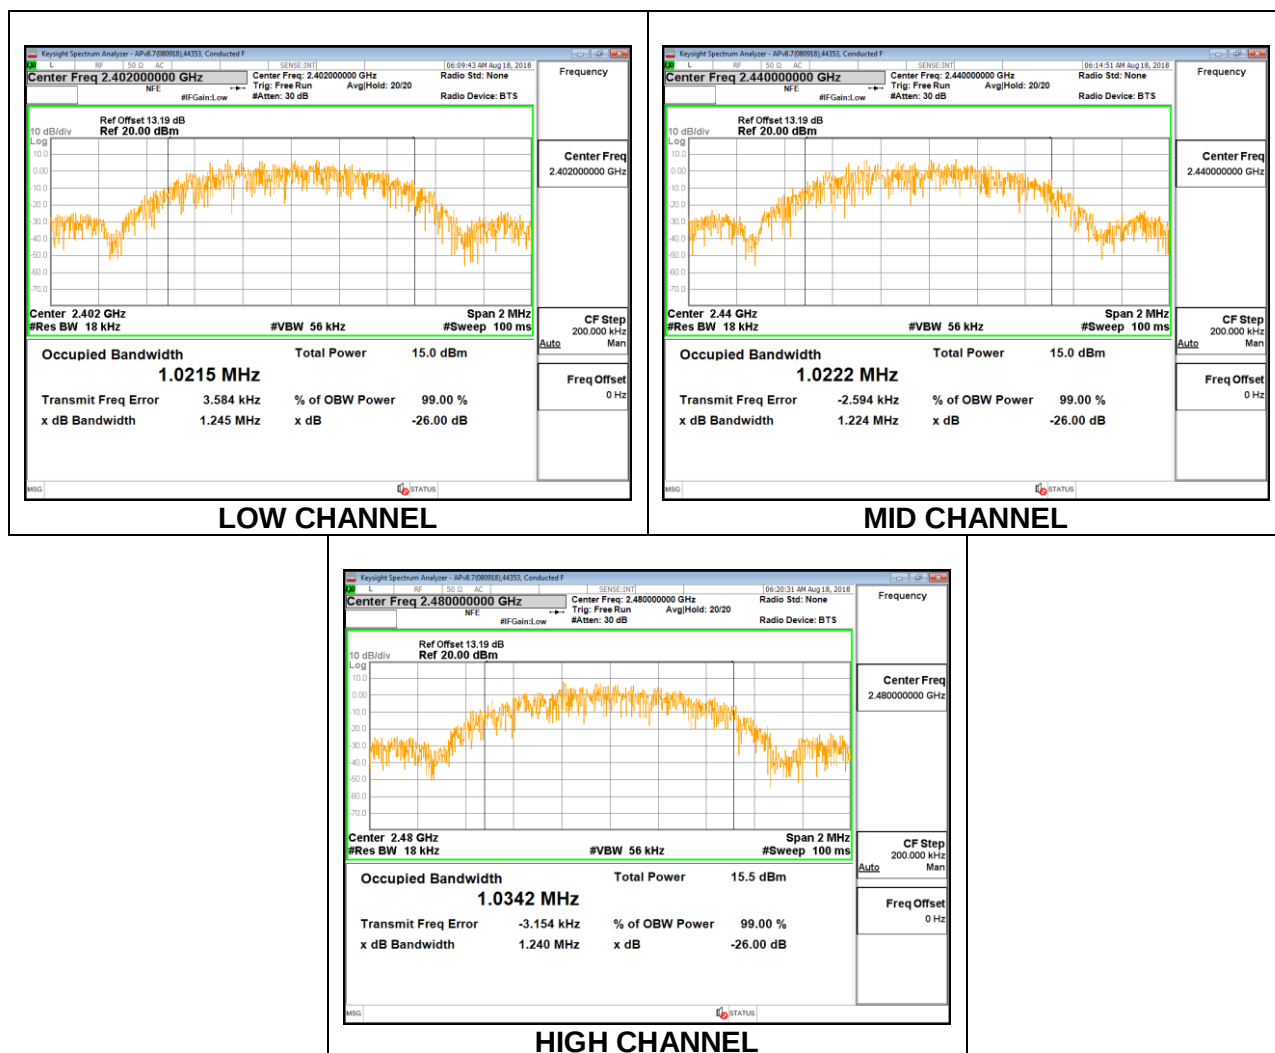

8.2.2. BLE (2Mbps)

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.0983
Middle	2440	2.0819
High	2478	2.0372

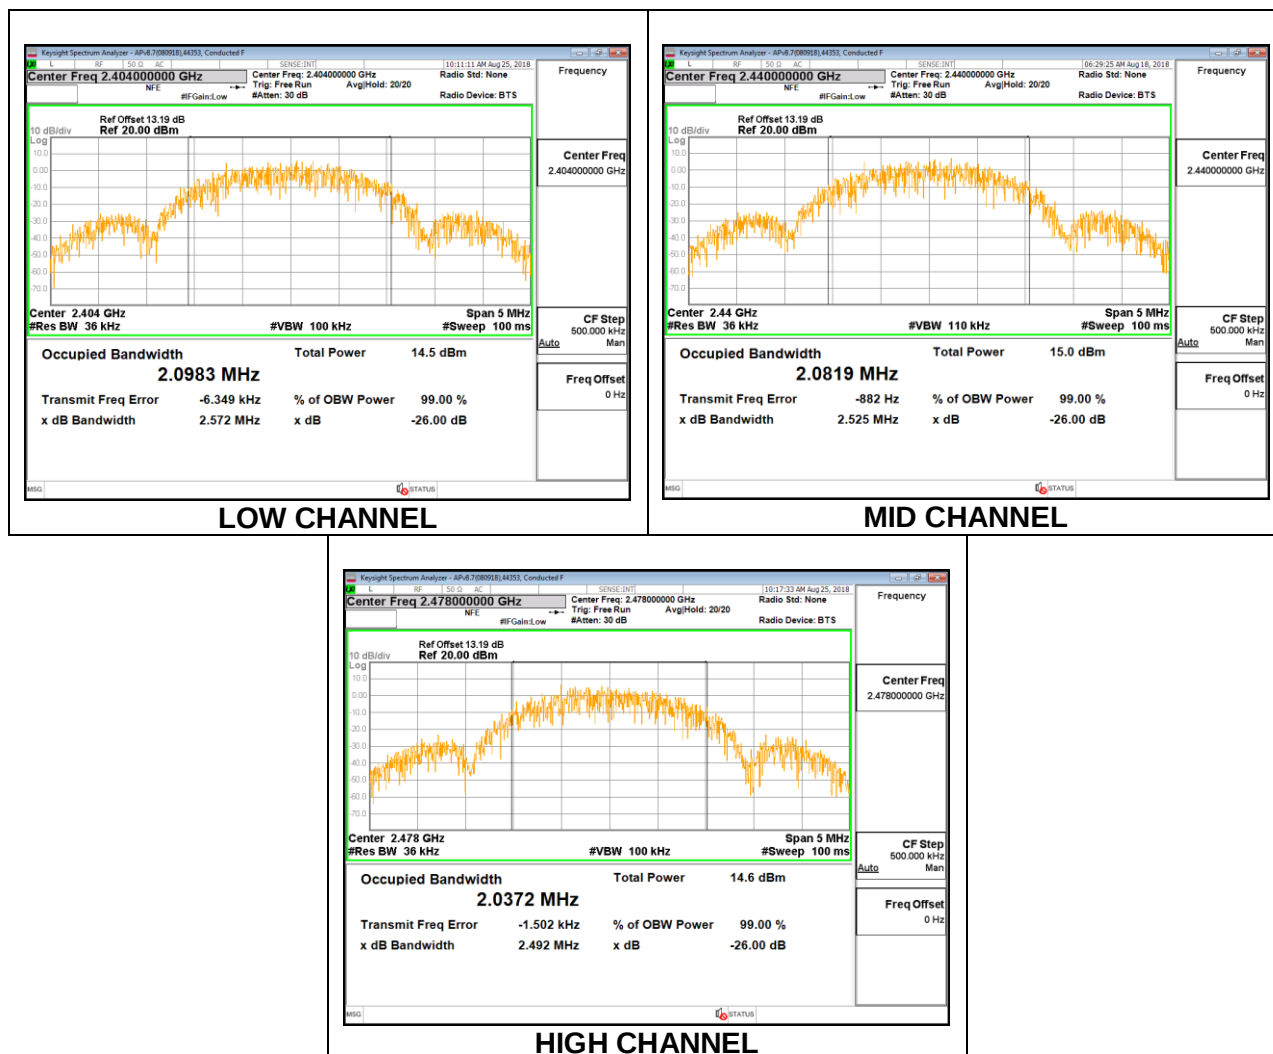

8.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)


RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


8.3.1. BLE (1Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.771	0.5
Middle	2440	0.738	0.5
High	2480	0.723	0.5

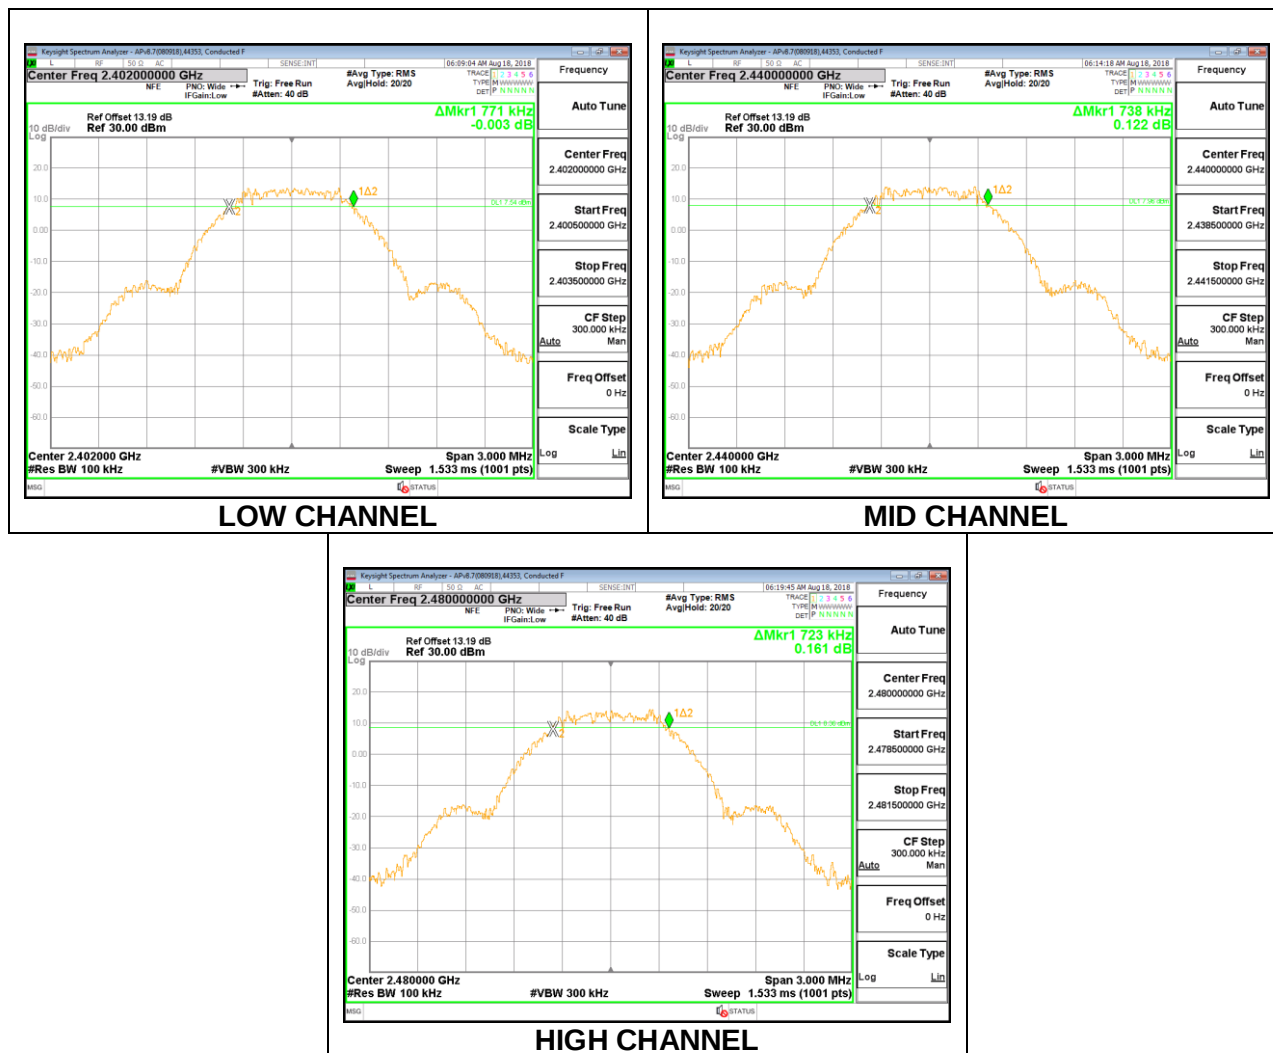

8.3.2. BLE (2Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	1.434	0.5
Middle	2440	1.416	0.5
High	2478	1.380	0.5

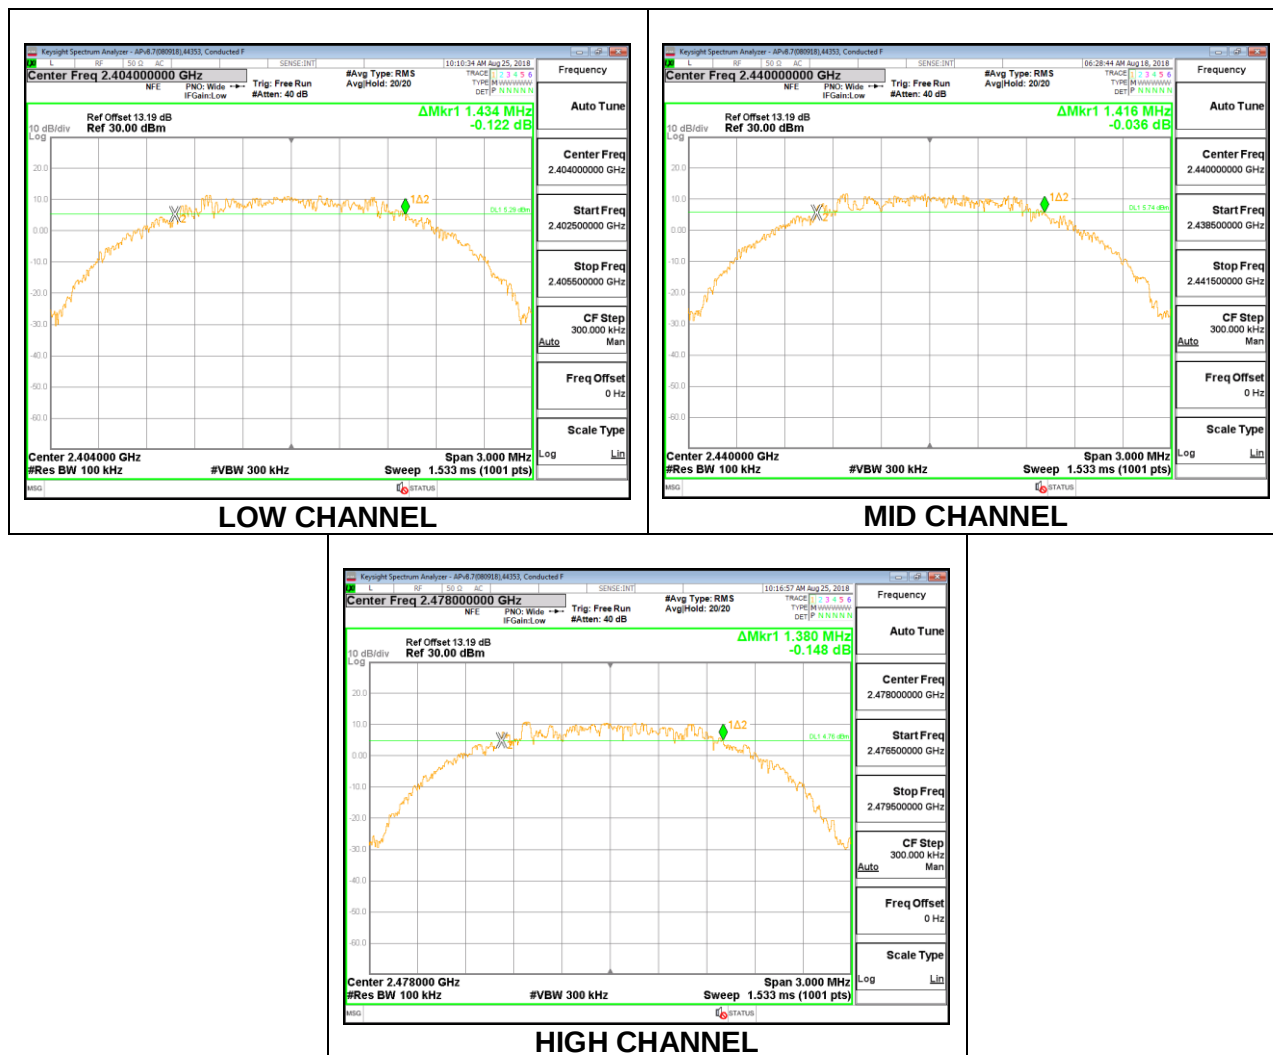

8.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated peak reading of power.

RESULTS

8.4.1. BLE (1Mbps)

Tested By:	31300
Date:	12/10/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.59	30	-20.41
Middle	2440	9.78	30	-20.22
High	2480	9.86	30	-20.14

8.4.2. BLE (2Mbps)

Tested By:	31300
Date:	12/10/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.63	30	-20.37
Middle	2440	9.57	30	-20.43
High	2478	9.88	30	-20.12

8.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated average reading of power.

RESULTS

8.5.1. BLE (1Mbps)

Tested By:	31300
Date:	12/10/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	9.28
Middle	2440	9.53
High	2480	9.55

8.5.2. BLE (2Mbps)

Tested By:	31300
Date:	12/10/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	9.35
Middle	2440	9.48
High	2478	9.56

8.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)


RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS


8.6.1. BLE (1Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-0.26	8	-8.26
Middle	2440	-0.21	8	-8.21
High	2480	-0.44	8	-8.44

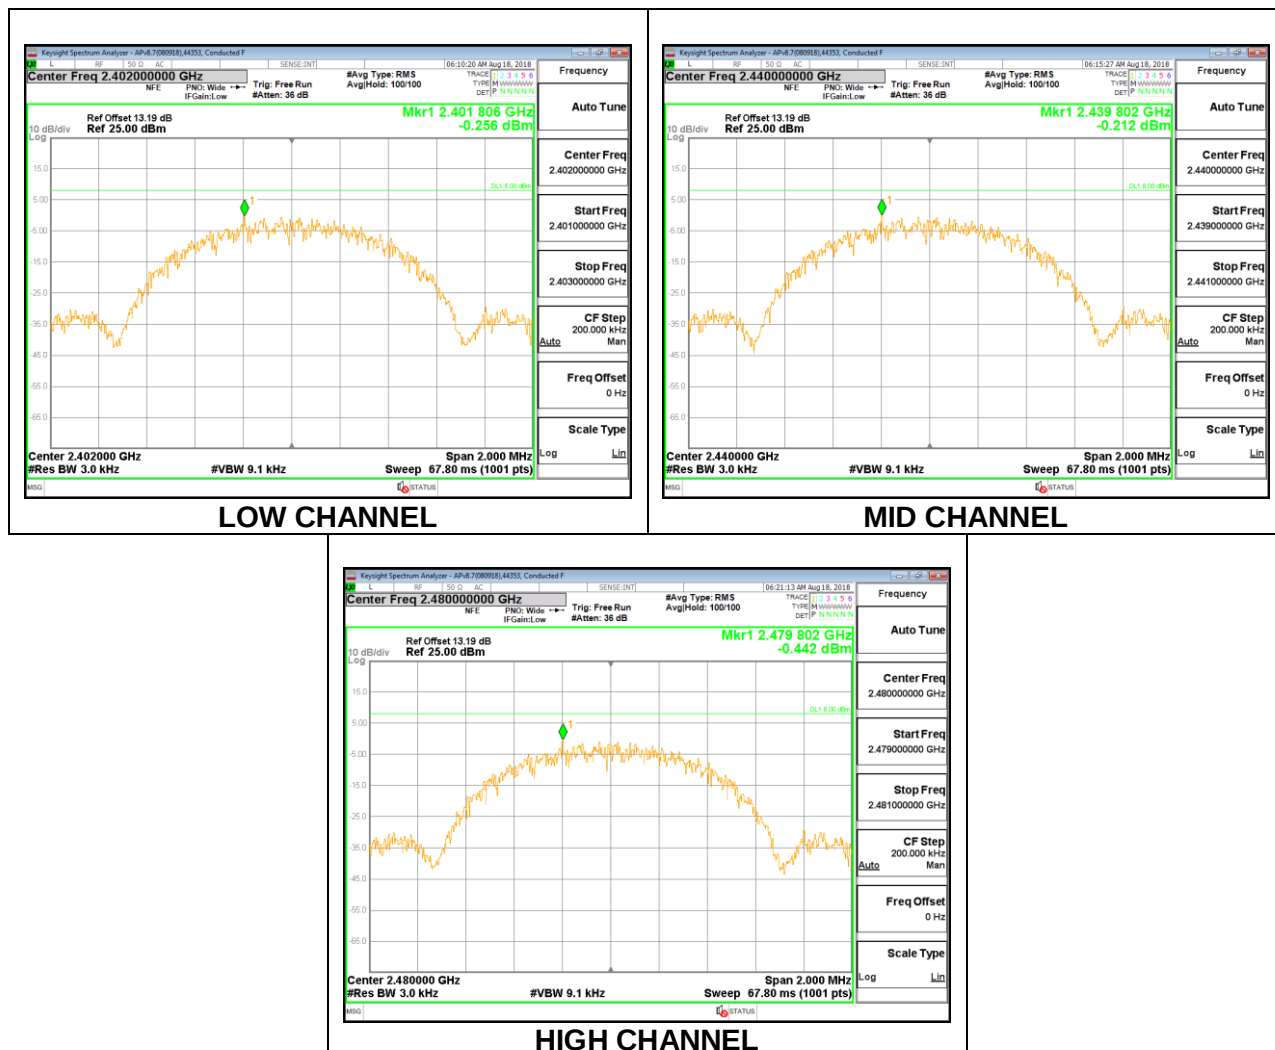

8.6.2. BLE (2Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.07	8	-12.07
Middle	2440	-3.54	8	-11.54
High	2478	-4.53	8	-12.53

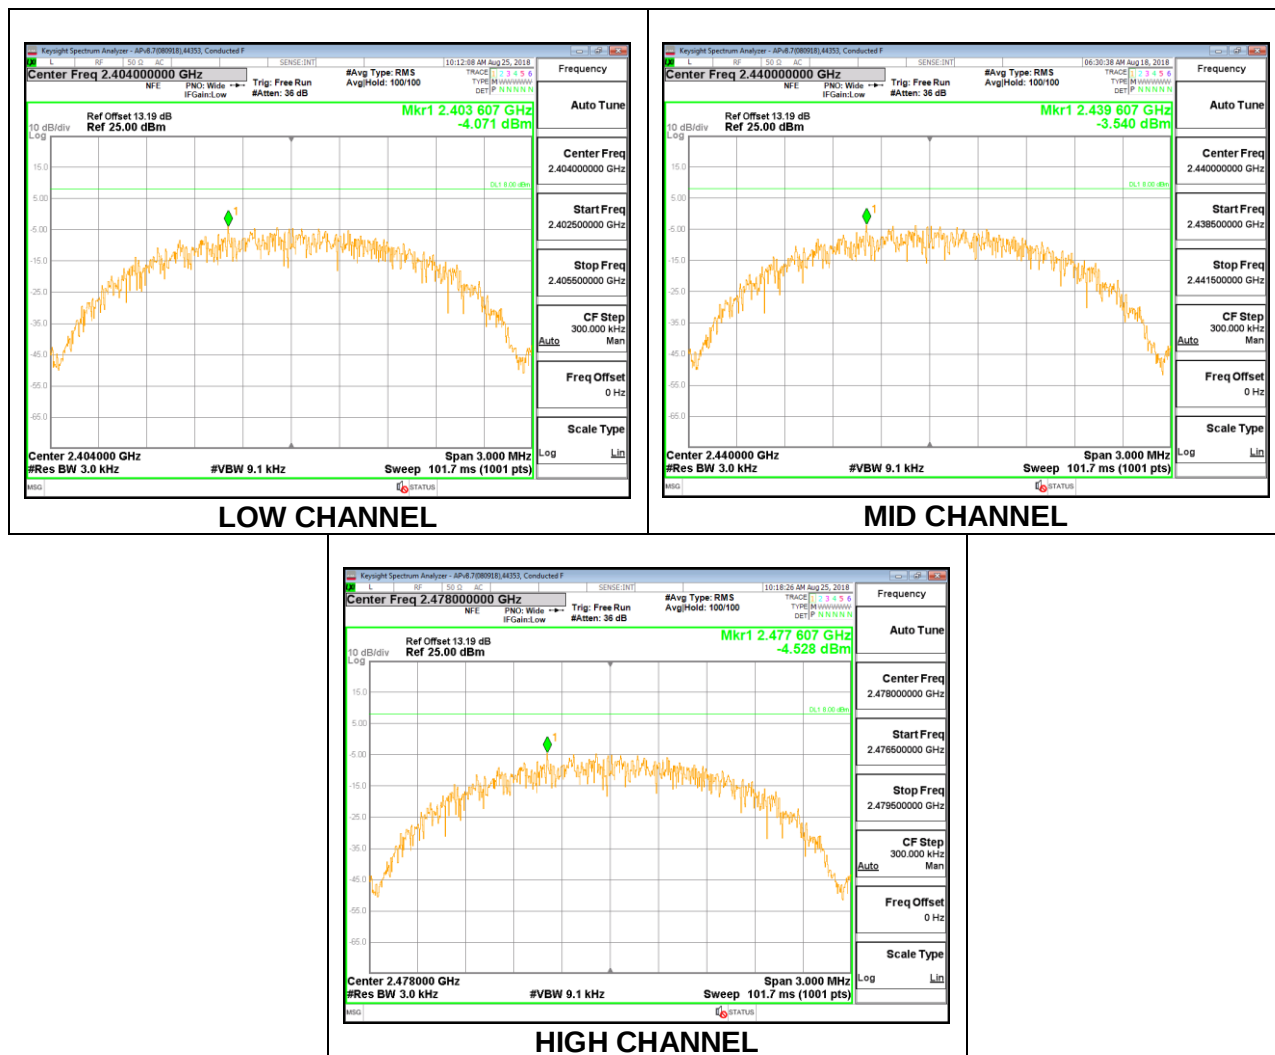

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS


FCC §15.247 (d)

RSS-247 5.5


Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

RESULTS

8.7.1. BLE (1Mbps)

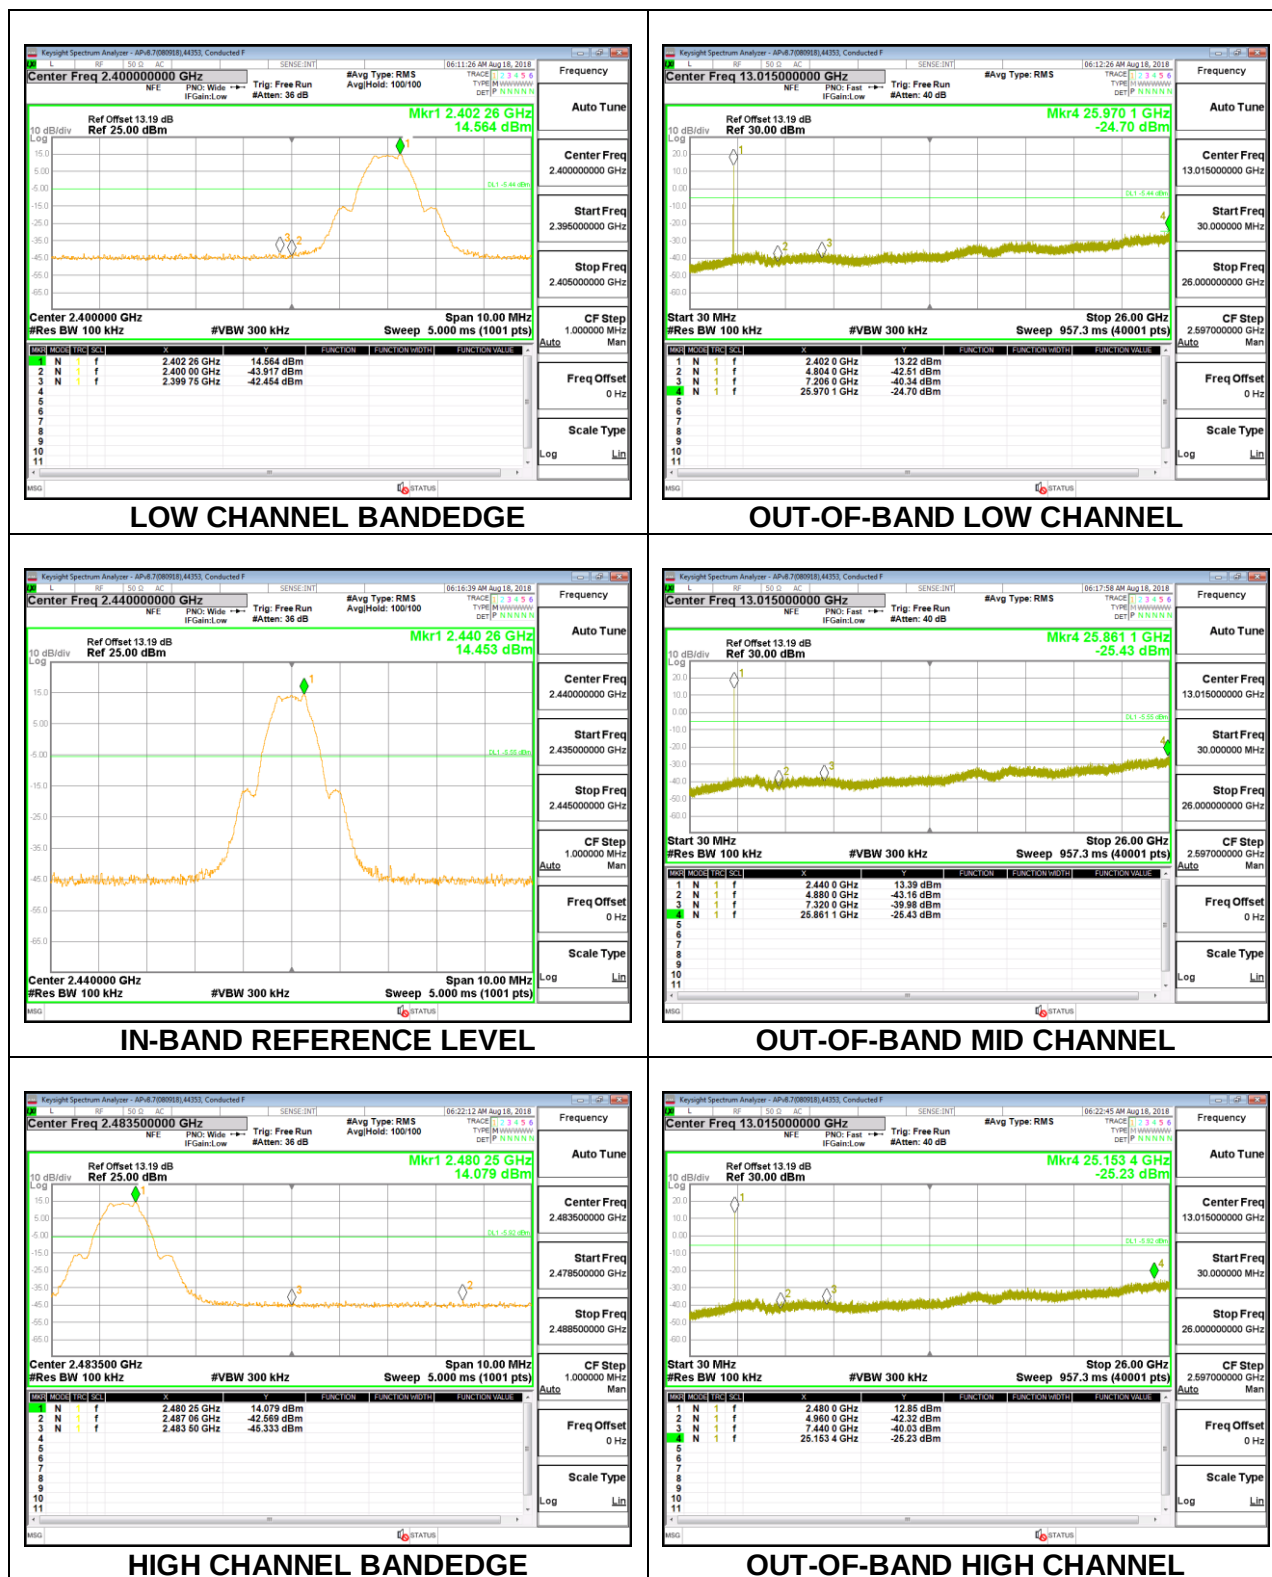

8.7.2. BLE (2Mbps)

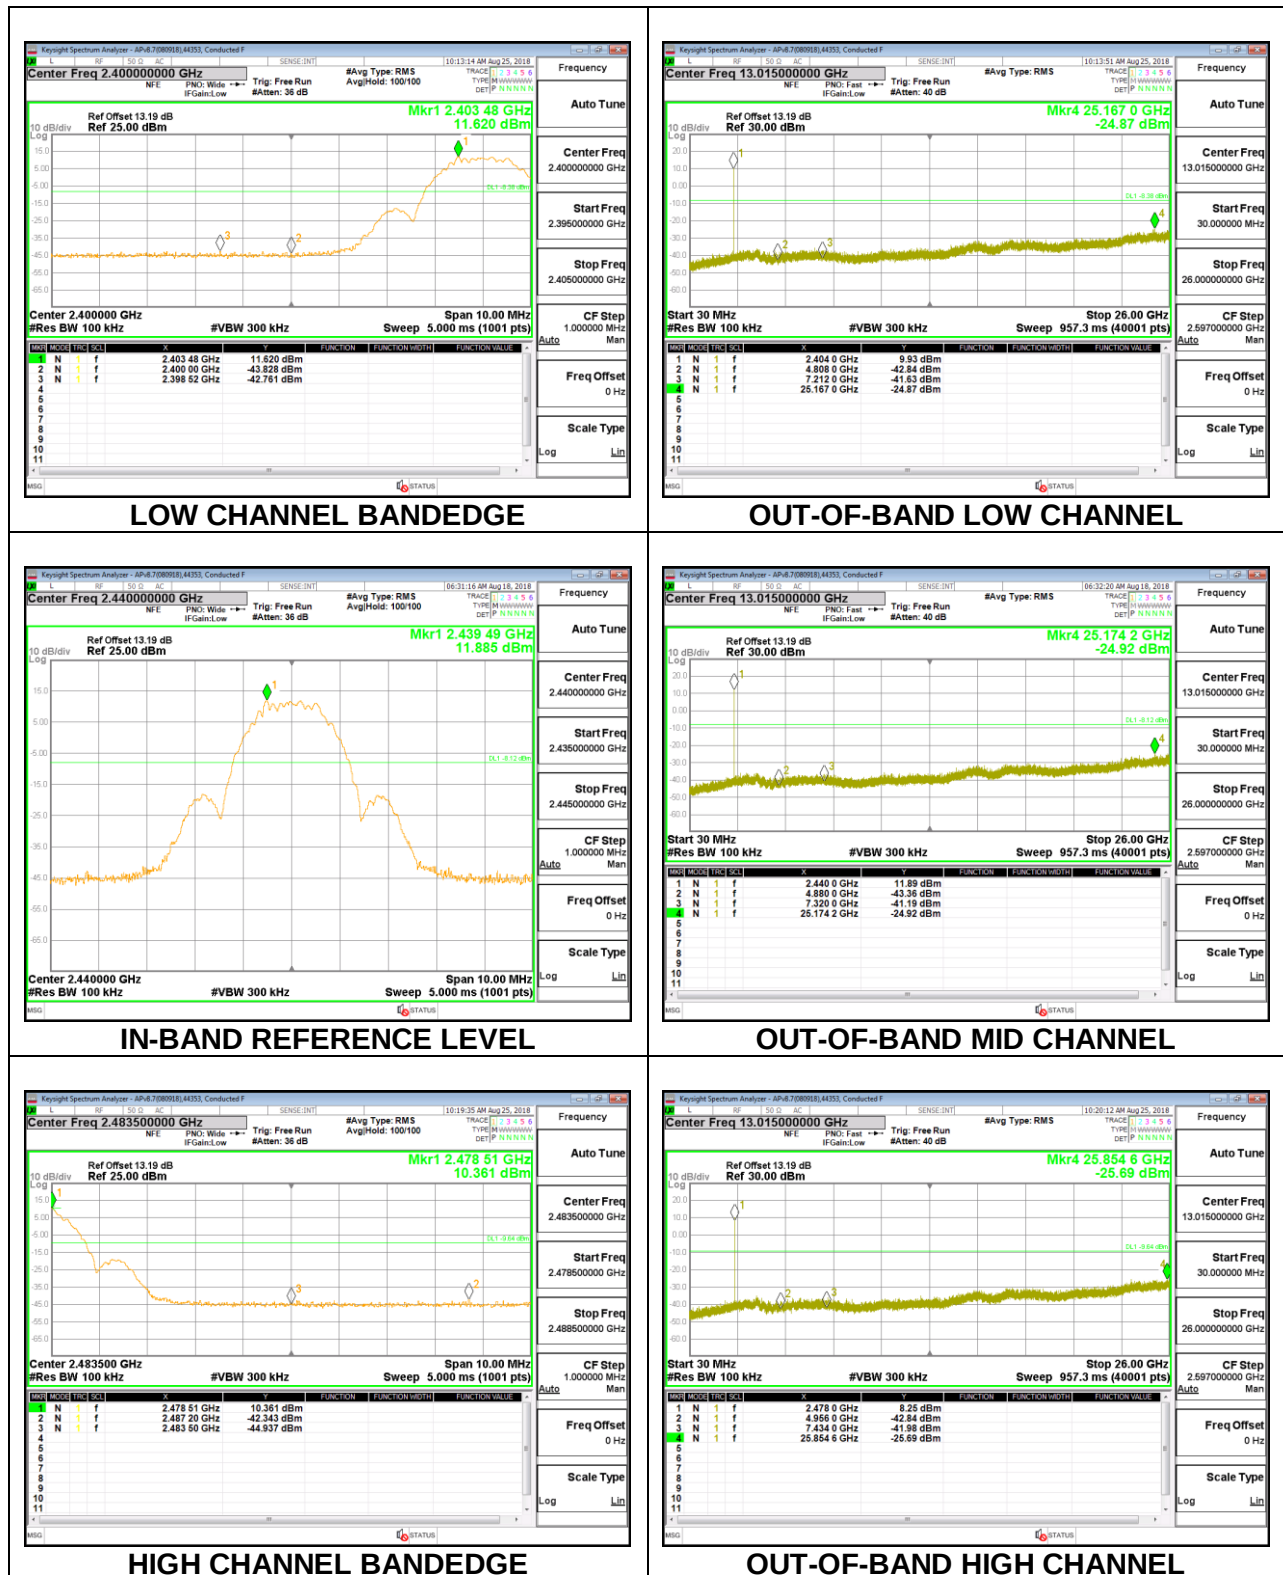

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BLE (1Mbps)

Antenna 1

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

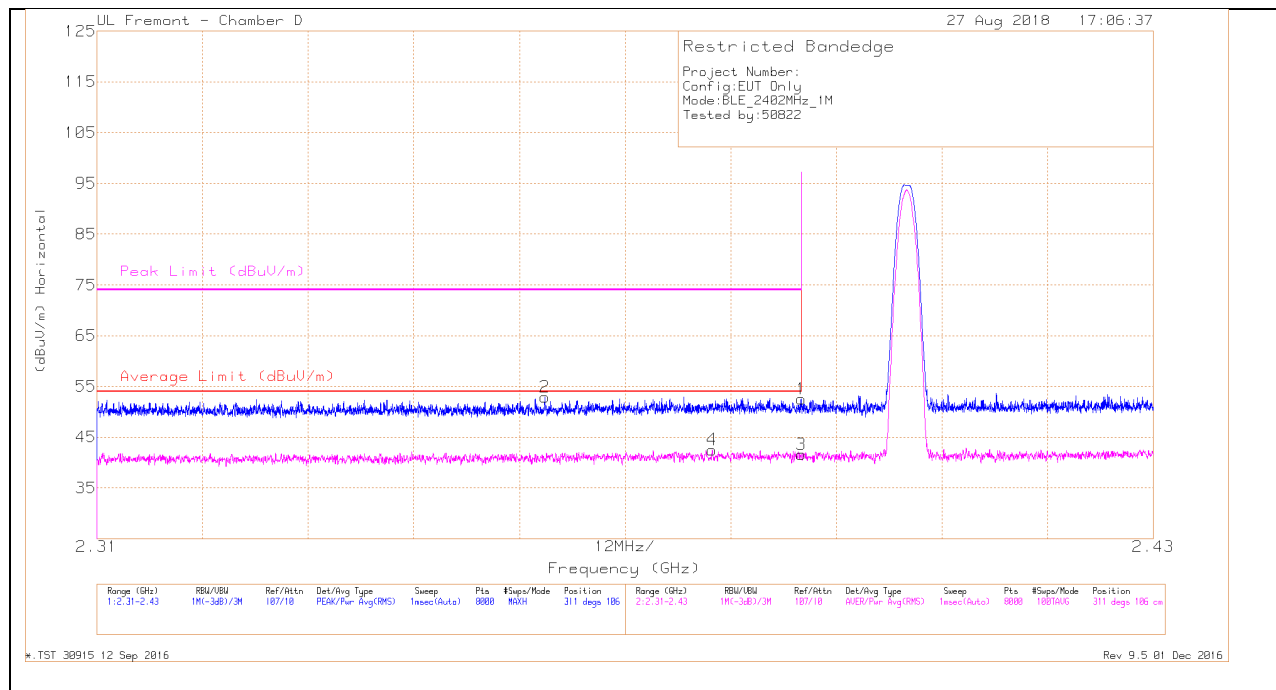


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.97	Pk	32.1	-20.5	52.57	-	-	74	-21.43	311	106	H
2	* 2.361	41.65	Pk	31.9	-20.6	52.95	-	-	74	-21.05	311	106	H
3	* 2.39	29.98	RMS	32.1	-20.5	41.58	54	-12.42	-	-	311	106	H
4	* 2.38	30.83	RMS	32.1	-20.4	42.53	54	-11.47	-	-	311	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

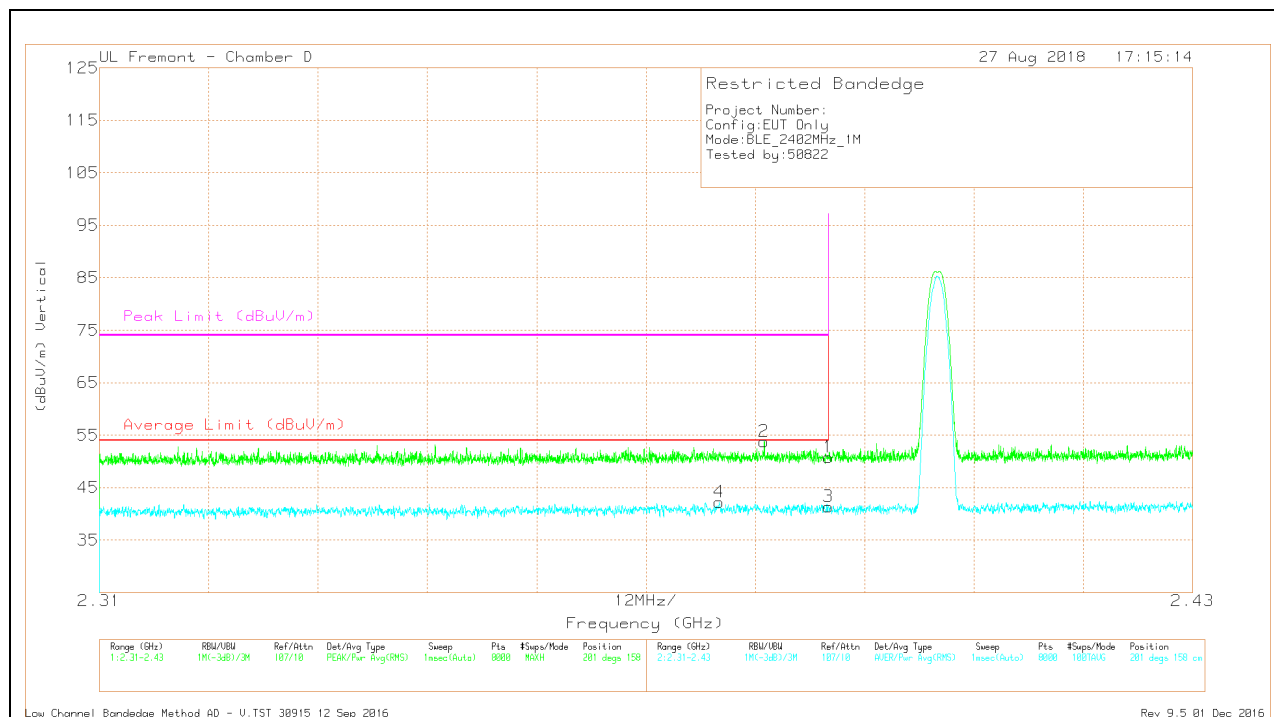


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.378	30.47	RMS	32.1	-20.4	42.17	54	-11.83	-	-	201	158	V
2	* 2.383	42.09	Pk	32.2	-20.5	53.79	-	-	74	-20.21	201	158	V
1	* 2.39	39.23	Pk	32.1	-20.5	50.83	-	-	74	-23.17	201	158	V
3	* 2.39	29.75	RMS	32.1	-20.5	41.35	54	-12.65	-	-	201	158	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

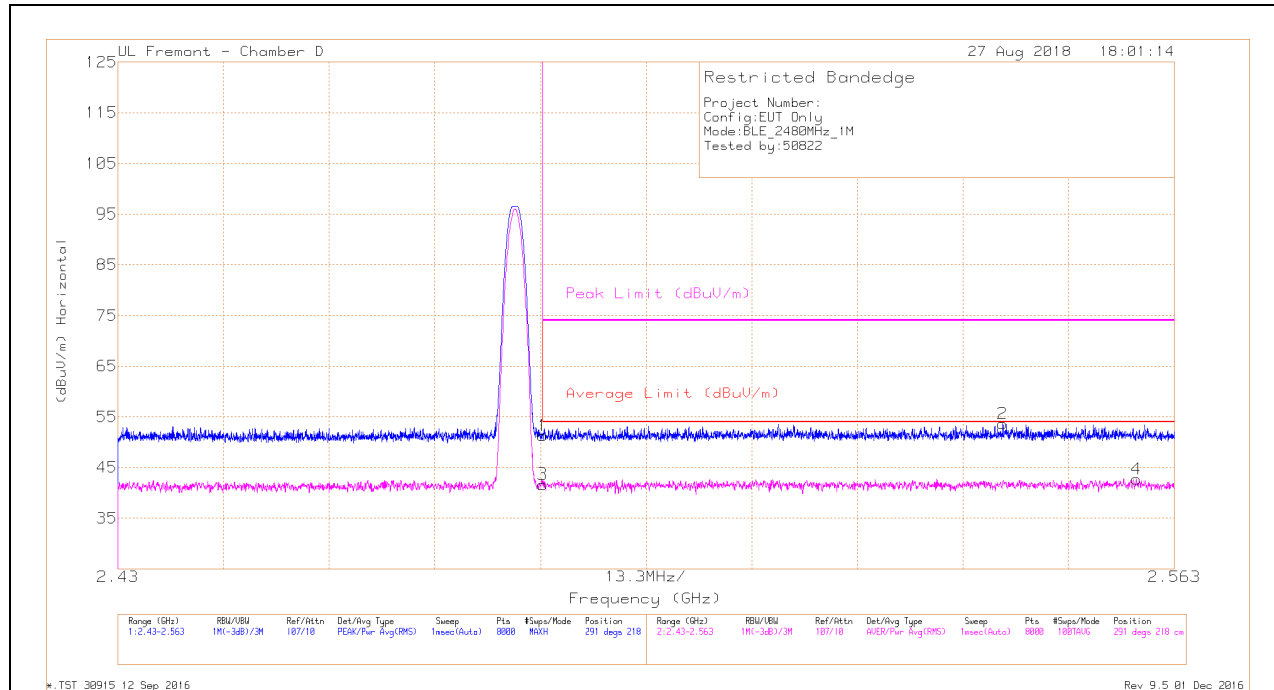BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.18	Pk	32.5	-20.4	51.28	-	-	74	-22.72	291	218	H
3	* 2.484	29.56	RMS	32.5	-20.4	41.66	54	-12.34	-	-	291	218	H
2	2.541	41.27	Pk	32.7	-20.3	53.67	-	-	74	-20.33	291	218	H
4	2.558	30.44	RMS	32.6	-20.3	42.74	54	-11.26	-	-	291	218	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

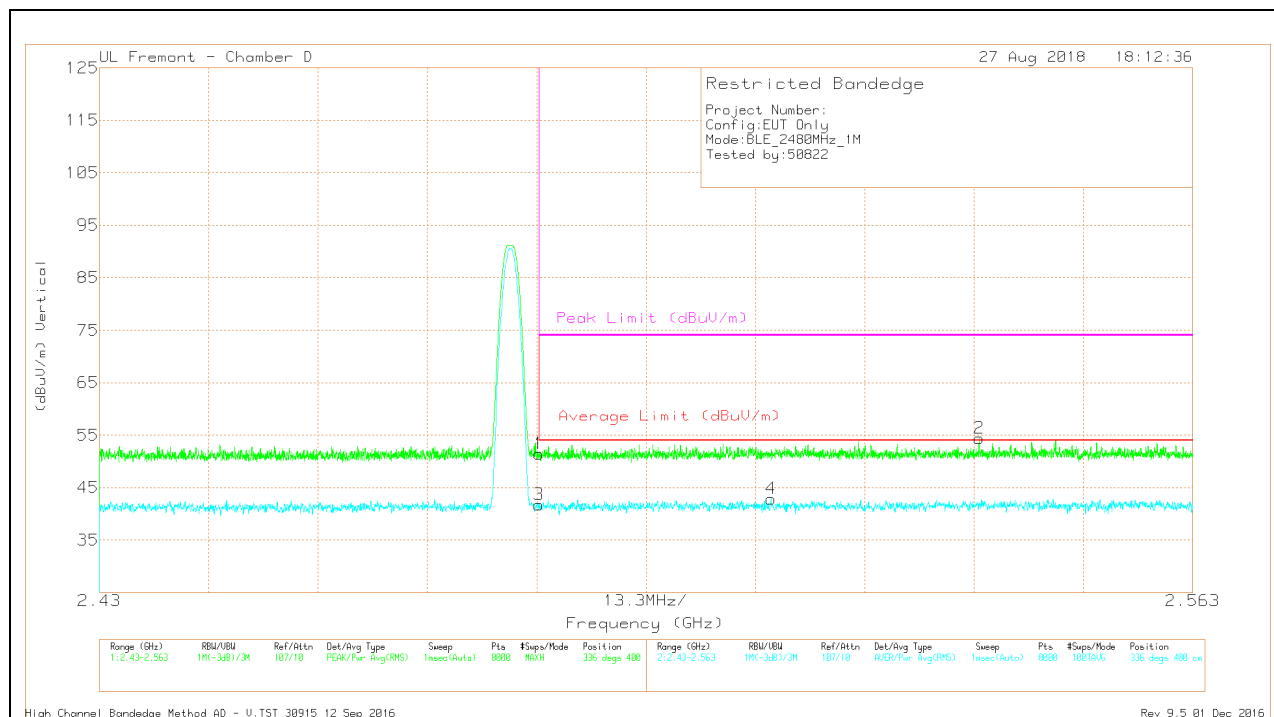

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.33	Pk	32.5	-20.4	51.43	-	-	74	-22.57	336	400	V
3	* 2.484	29.68	RMS	32.5	-20.4	41.78	54	-12.22	-	-	336	400	V
4	2.512	30.58	RMS	32.6	-20.3	42.88	54	-11.12	-	-	336	400	V
2	2.537	42.2	Pk	32.6	-20.4	54.4	-	-	74	-19.6	336	400	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

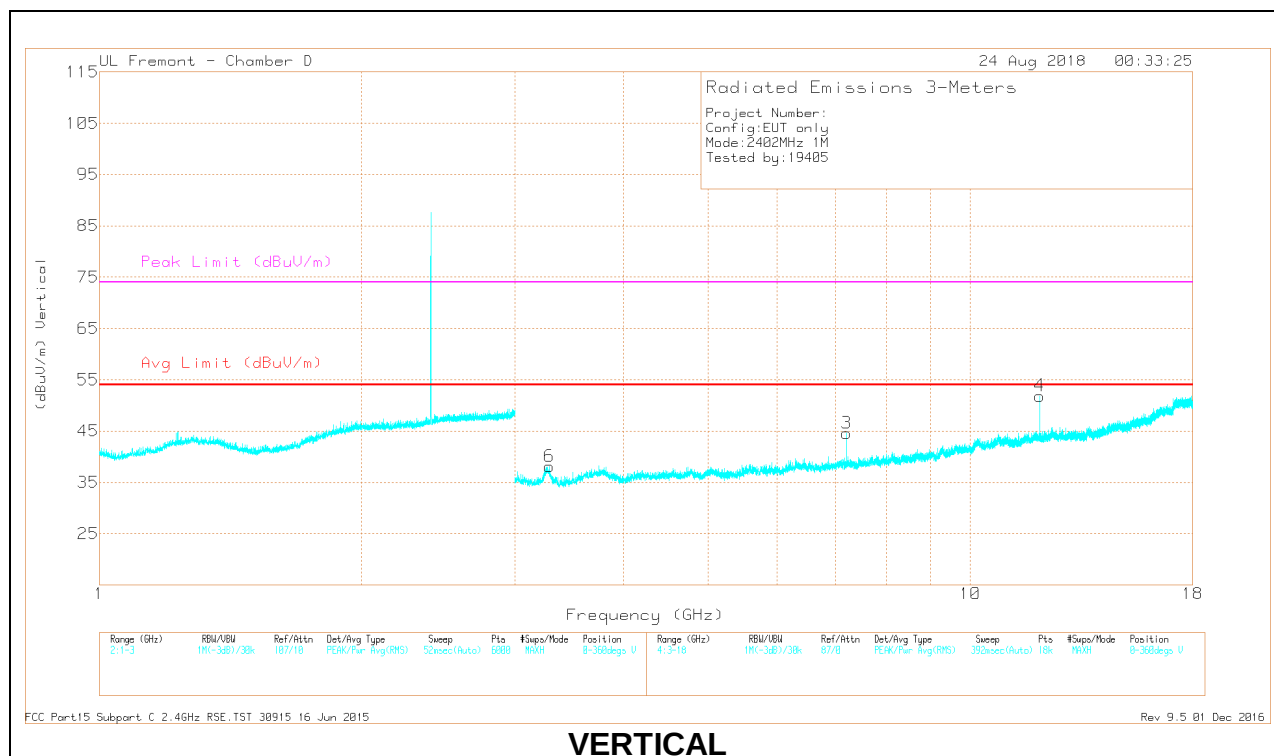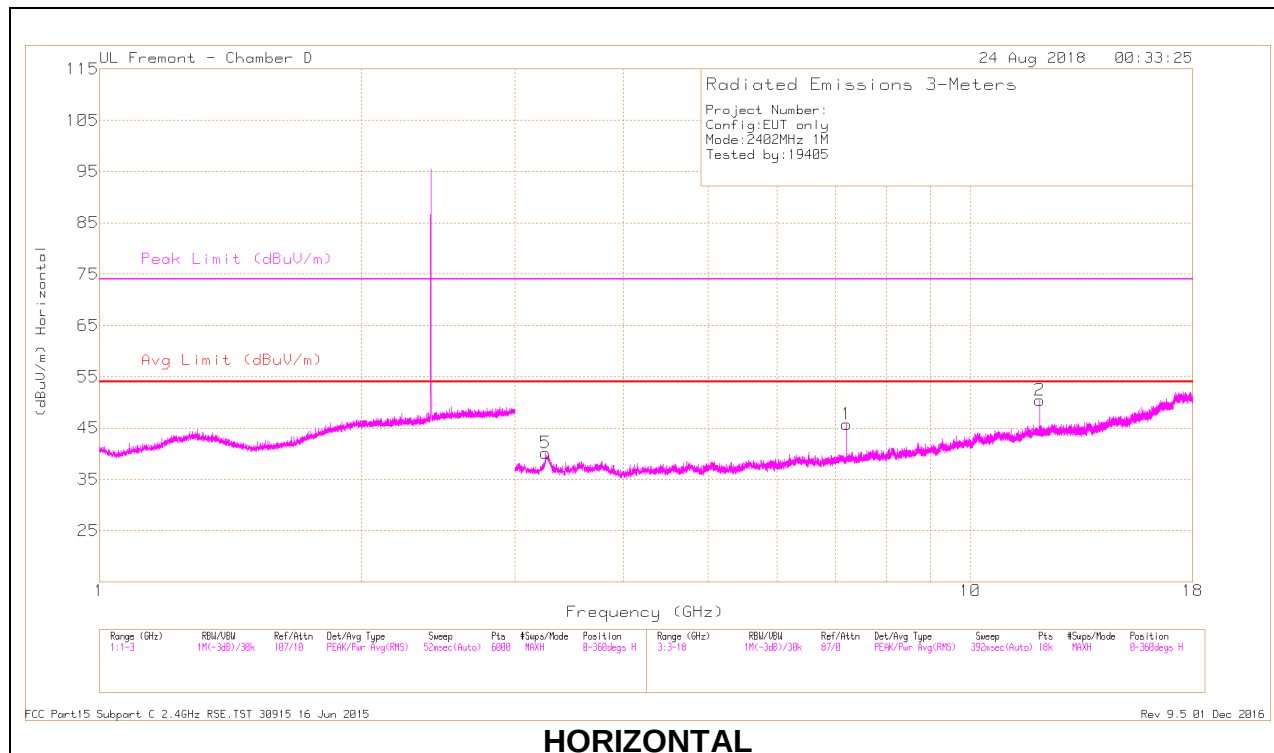

RADIATED EMISSIONS



Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 12.011	37.43	PK2	39.1	-20.5	56.03	-	-	74	-17.97	356	108	H
	* 12.011	28.22	MAv1	39.1	-20.5	46.82	54	-7.18	-	-	356	108	H
4	* 12.011	38.76	PK2	39.1	-20.5	57.36	-	-	74	-16.64	250	102	V
	* 12.011	30.69	MAv1	39.1	-20.5	49.29	54	-4.71	-	-	250	102	V
5	3.253	27.59	MAv1	34.6	-28	34.19	-	-	-	-	280	135	H
	3.254	39.47	PK2	34.7	-28	46.17	-	-	-	-	280	135	H
6	3.284	39.08	PK2	34.2	-27.4	45.88	-	-	-	-	272	168	V
	3.284	27.59	MAv1	34.2	-27.4	34.39	-	-	-	-	272	168	V
3	7.205	31.23	MAv1	35.6	-24.6	42.23	-	-	-	-	156	112	H
	7.207	39.4	PK2	35.6	-24.6	50.4	-	-	-	-	156	112	H
1	7.207	40.96	PK2	35.6	-24.6	51.96	-	-	-	-	204	348	V
	7.207	33.03	MAv1	35.6	-24.6	44.03	-	-	-	-	204	348	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

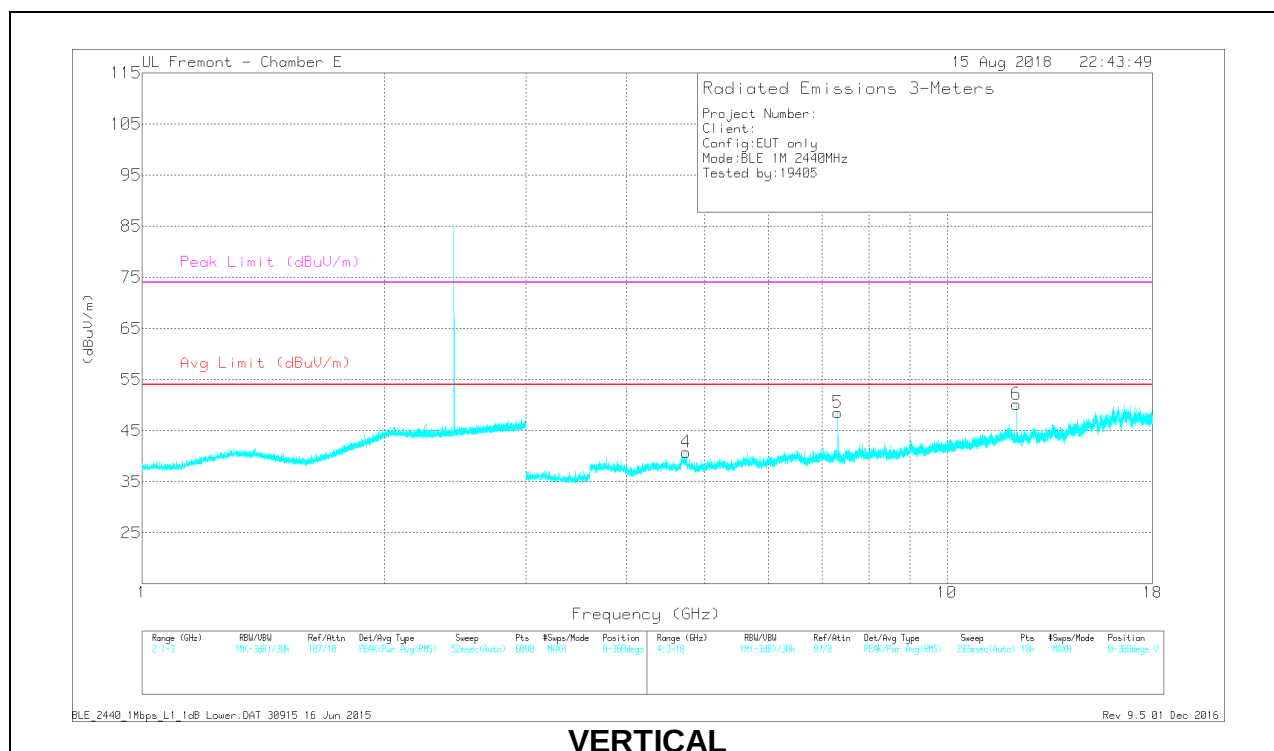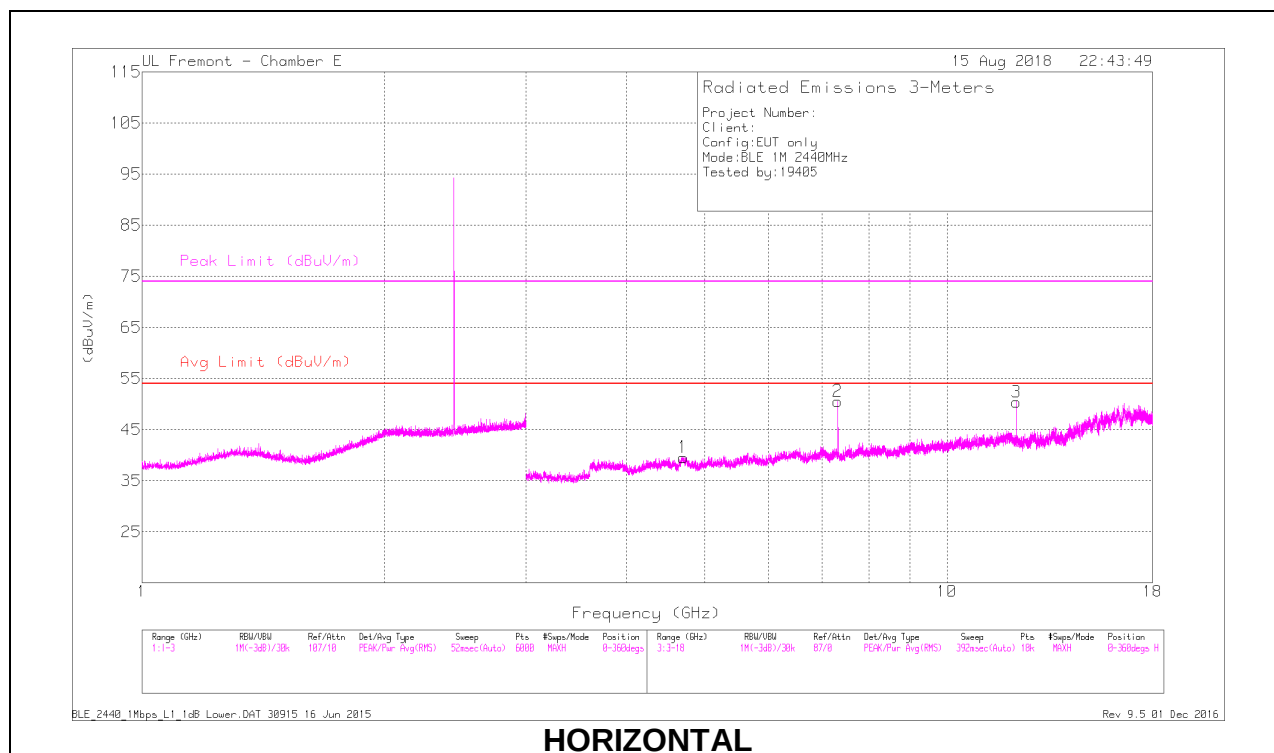

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.703	41.41	PK2	34.4	-28.7	47.11	-	-	74	-26.89	46	200	H
* 4.704	29.89	MAv1	34.4	-28.7	35.59	54	-18.41	-	-	46	200	H
* 7.319	45.8	PK2	36	-26.2	55.6	-	-	74	-18.4	42	114	H
* 7.321	38.77	MAv1	36	-26.2	48.57	54	-5.43	-	-	42	114	H
* 12.199	41.27	PK2	39	-22.7	57.57	-	-	74	-16.43	254	110	H
* 12.199	33.05	MAv1	39	-22.7	49.35	54	-4.65	-	-	254	110	H
* 4.743	41.91	PK2	34.4	-28.5	47.81	-	-	74	-26.19	221	101	V
* 4.742	30.13	MAv1	34.4	-28.5	36.03	54	-17.97	-	-	221	101	V
* 7.321	45.4	PK2	36	-26.2	55.2	-	-	74	-18.8	100	256	V
* 7.321	38.36	MAv1	36	-26.2	48.16	54	-5.84	-	-	100	256	V
* 12.199	39.8	PK2	39	-22.7	56.1	-	-	74	-17.9	149	128	V
* 12.199	30.79	MAv1	39	-22.7	47.09	54	-6.91	-	-	149	128	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

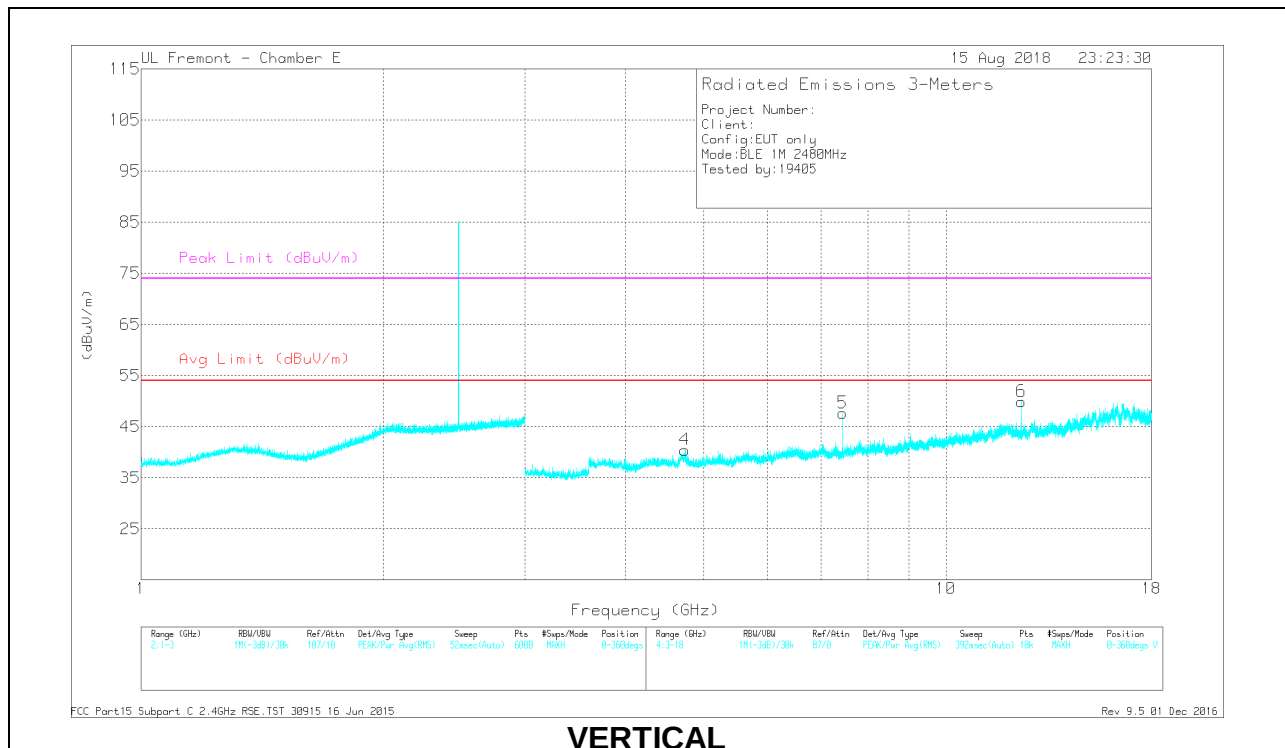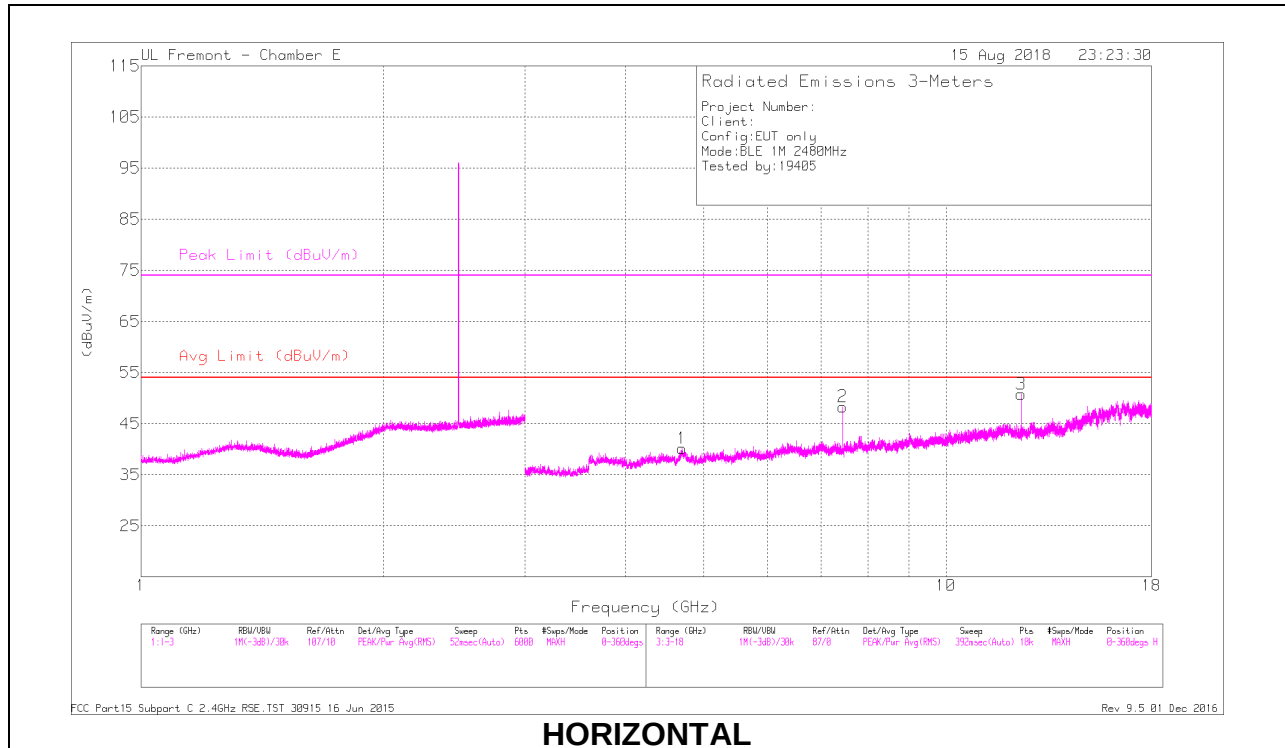

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.703	41.45	PK2	34.4	-28.7	47.15	-	-	74	-26.85	98	115	H
* 4.702	29.95	MAv1	34.4	-28.8	35.55	54	-18.45	-	-	98	115	H
* 7.439	44.77	PK2	36.1	-26.8	54.07	-	-	74	-19.93	23	103	H
* 7.439	37.32	MAv1	36.1	-26.8	46.62	54	-7.38	-	-	23	103	H
* 12.399	41.62	PK2	38.6	-23.4	56.82	-	-	74	-17.18	52	104	H
* 12.399	33.7	MAv1	38.6	-23.4	48.9	54	-5.1	-	-	52	104	H
* 4.738	41	PK2	34.4	-28.4	47	-	-	74	-27	70	140	V
* 4.738	29.97	MAv1	34.4	-28.4	35.97	54	-18.03	-	-	70	140	V
* 7.441	43.54	PK2	36.1	-26.8	52.84	-	-	74	-21.16	125	263	V
* 7.439	35.72	MAv1	36.1	-26.8	45.02	54	-8.98	-	-	125	263	V
* 12.401	41.07	PK2	38.6	-23.4	56.27	-	-	74	-17.73	114	101	V
* 12.401	32.38	MAv1	38.6	-23.4	47.58	54	-6.42	-	-	114	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.2. BLE (2Mbps)

Antenna 1

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

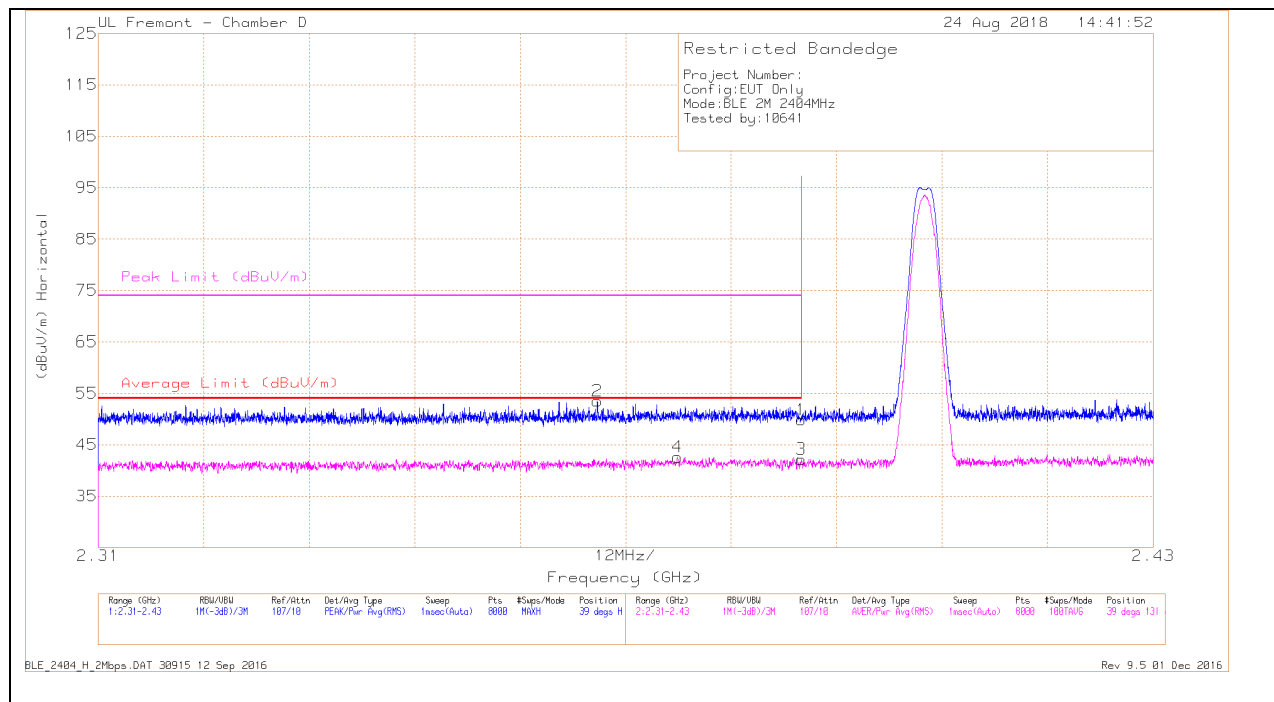


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.22	Pk	32.1	-20.5	49.82	-	-	74	-24.18	39	131	H
2	* 2.367	42.07	Pk	31.9	-20.5	53.47	-	-	74	-20.53	39	131	H
3	* 2.39	30.56	RMS	32.1	-20.5	42.16	54	-11.84	-	-	39	131	H
4	* 2.376	30.98	RMS	32.1	-20.5	42.58	54	-11.42	-	-	39	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

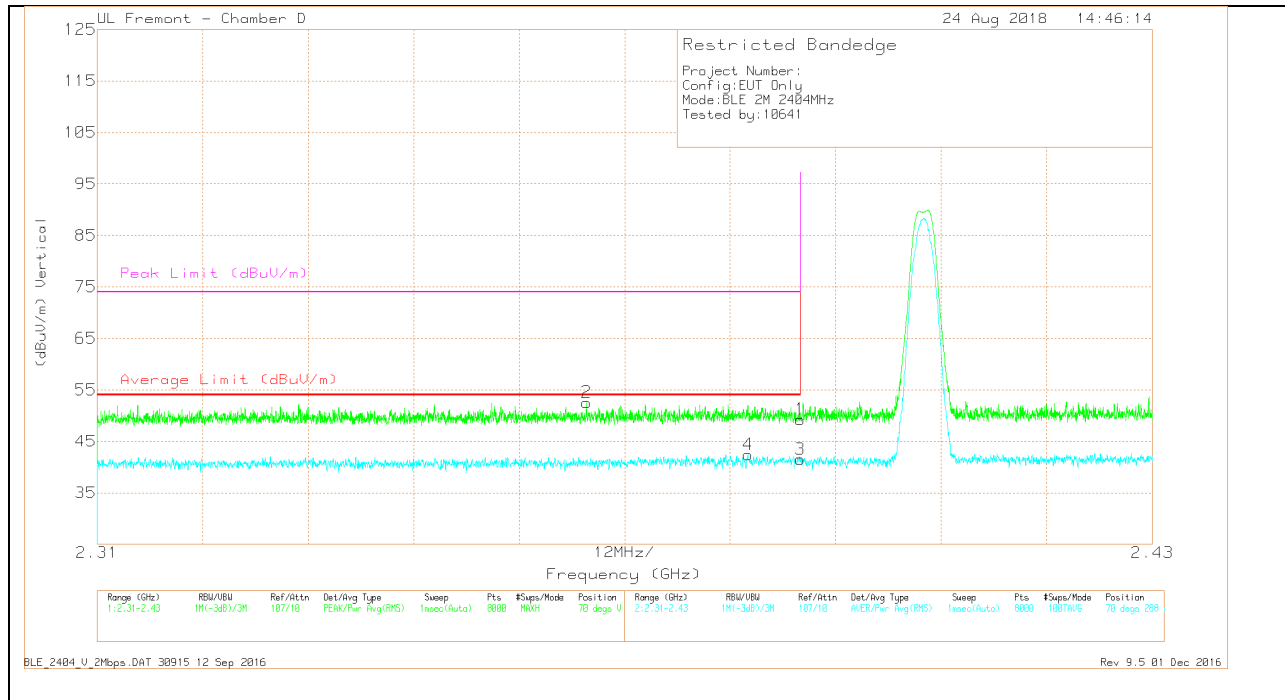


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.67	Pk	32.1	-20.5	49.27	-	-	74	-24.73	70	288	V
2	* 2.366	41.17	Pk	31.9	-20.5	52.57	-	-	74	-21.43	70	288	V
3	* 2.39	29.91	RMS	32.1	-20.5	41.51	54	-12.49	-	-	70	288	V
4	* 2.384	30.71	RMS	32.2	-20.5	42.41	54	-11.59	-	-	70	288	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

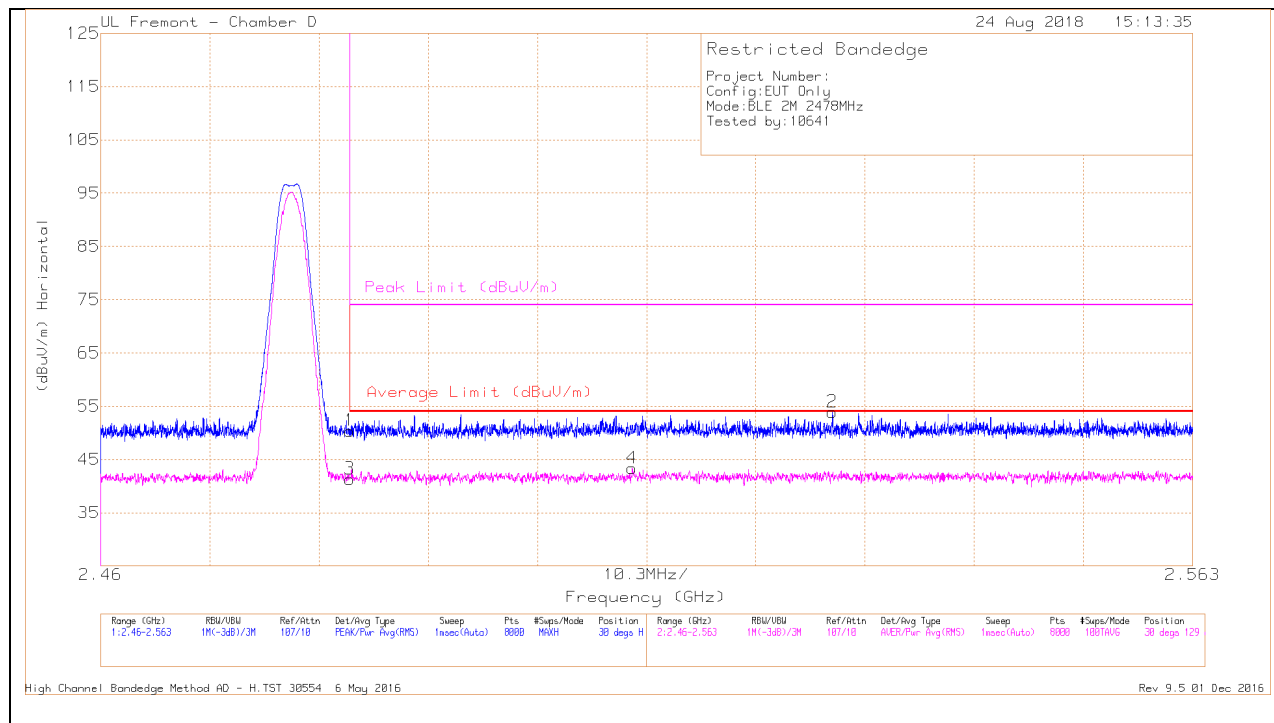BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.28	Pk	32.5	-20.4	50.38	-	-	74	-23.62	30	129	H
3	* 2.484	29.22	RMS	32.5	-20.4	41.32	54	-12.68	-	-	30	129	H
4	2.51	31.03	RMS	32.6	-20.3	43.33	54	-10.67	-	-	30	129	H
2	2.529	41.59	Pk	32.6	-20.3	53.89	-	-	74	-20.11	30	129	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

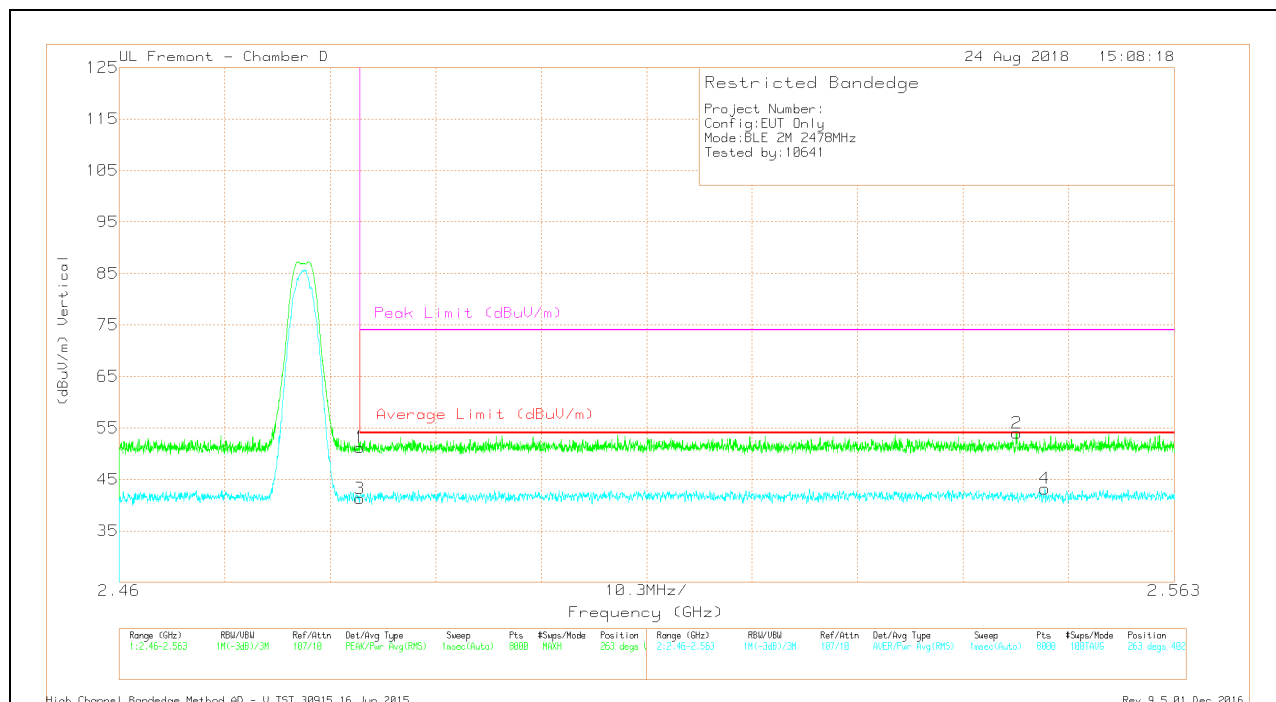

Marker	Frequenc y (GHz)	Meter Readin g (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.1	Pk	32.5	-20.4	51.2	-	-	74	-22.8	263	402	V
3	* 2.484	29.19	RMS	32.5	-20.4	41.29	54	-12.71	-	-	263	402	V
2	2.548	41.66	Pk	32.6	-20.3	53.96	-	-	74	-20.04	263	402	V
4	2.55	31.1	RMS	32.5	-20.4	43.2	54	-10.8	-	-	263	402	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

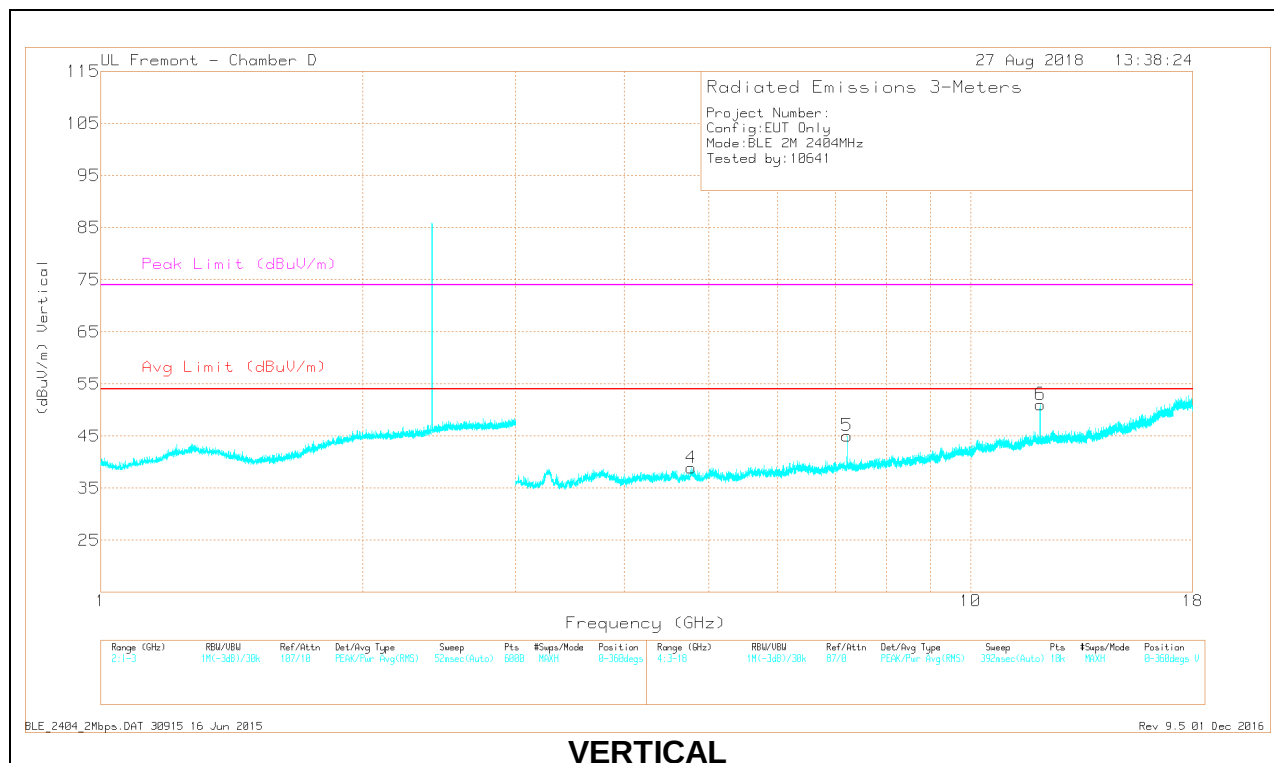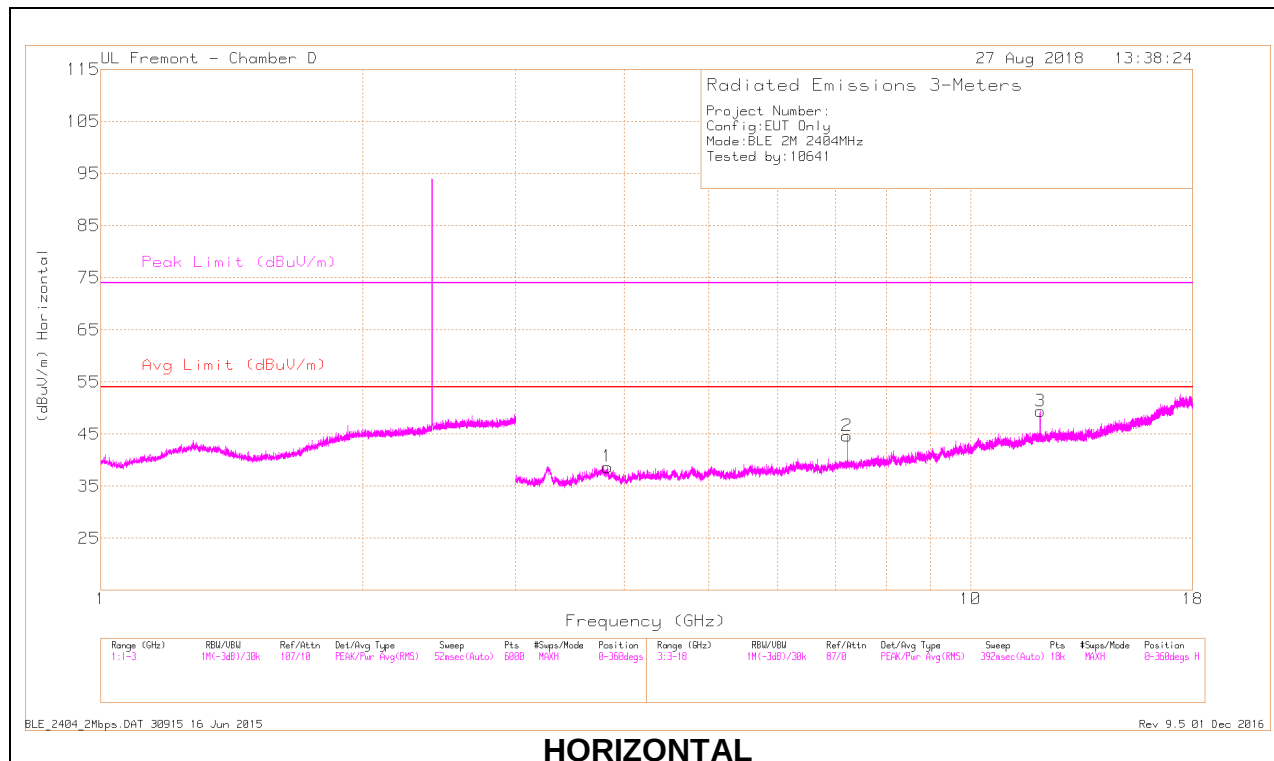

RADIATED EMISSIONS



Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.828	38.33	PK2	34	-28.2	44.13	-	-	74	-29.87	8	120	H
	* 3.827	26.72	MAv1	34	-28.2	32.52	54	-21.48	-	-	8	120	H
3	* 12.022	37.32	PK2	39	-20.5	55.82	-	-	74	-18.18	255	110	H
	* 12.022	27.83	MAv1	39	-20.5	46.33	54	-7.67	-	-	255	110	H
4	* 4.777	37.36	PK2	34.3	-26.2	45.46	-	-	74	-28.54	273	341	V
	* 4.775	25.66	MAv1	34.3	-26.2	33.76	54	-20.24	-	-	273	341	V
6	* 12.023	38.73	PK2	39	-20.5	57.23	-	-	74	-16.77	330	101	V
	* 12.022	29.65	MAv1	39	-20.5	48.15	54	-5.85	-	-	330	101	V
2	7.21	39.81	PK2	35.6	-24.6	50.81	-	-	-	-	263	113	H
	7.211	30.78	MAv1	35.6	-24.6	41.78	-	-	-	-	263	113	H
	7.211	29.12	MAv1	35.6	-24.6	40.12	-	-	-	-	101	146	V
5	7.213	39	PK2	35.7	-24.5	50.2	-	-	-	-	101	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

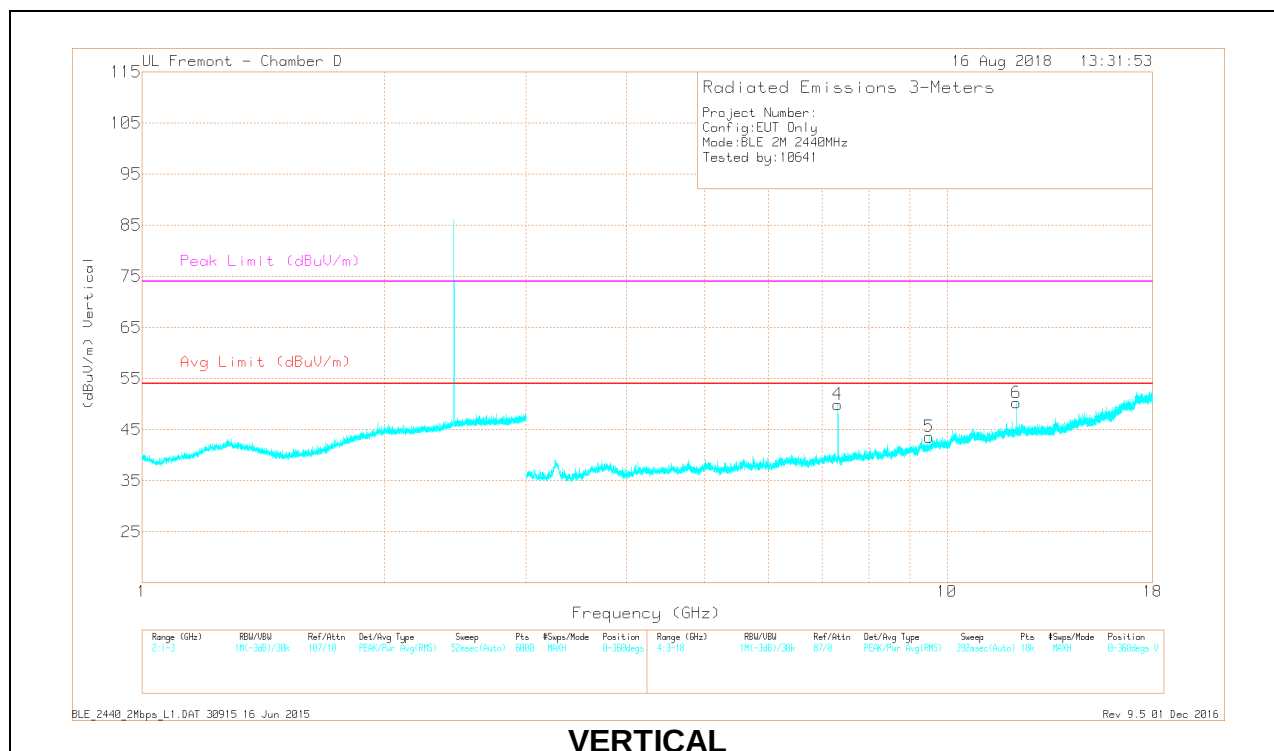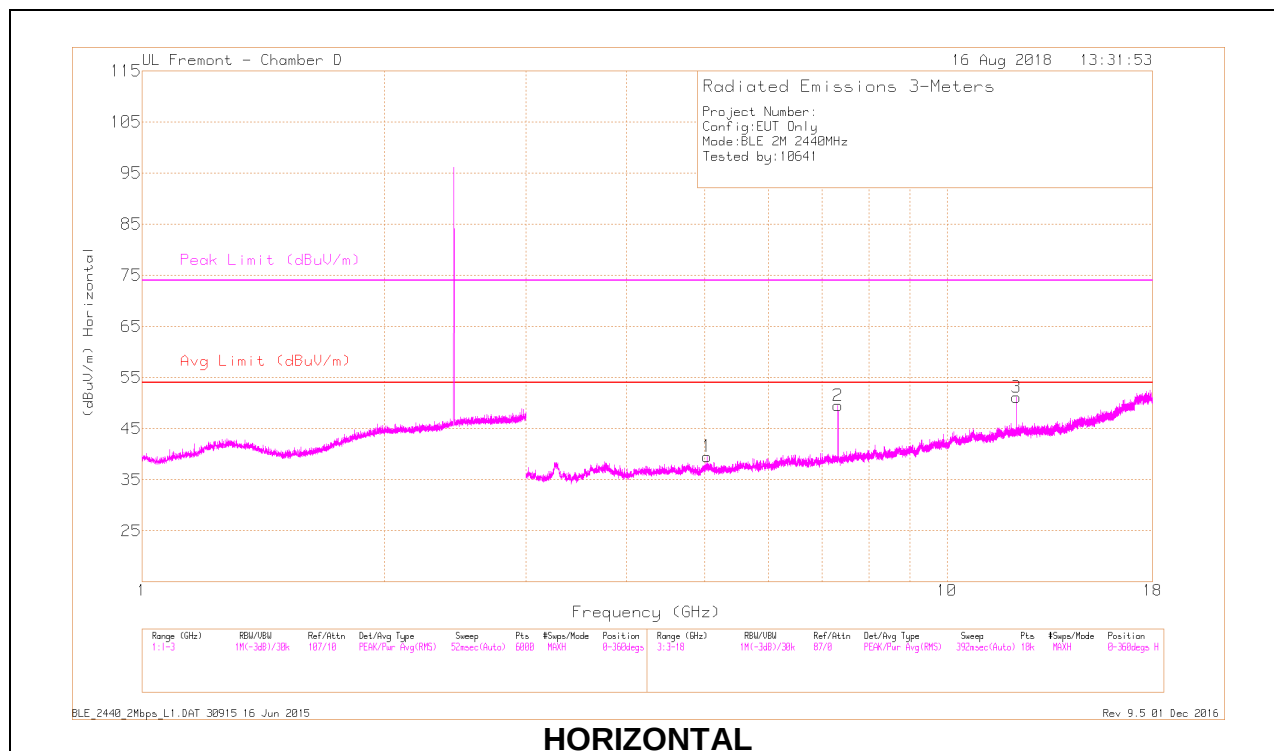

RADIATED EMISSIONS



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.318	43.64	PK2	35.7	-24.7	54.64	-	-	74	-19.36	245	101	H
	* 7.319	36.13	MAv1	35.7	-24.7	47.13	54	-6.87	-	-	245	101	H
3	* 12.203	38.99	PK2	39	-20.1	57.89	-	-	74	-16.11	81	102	H
	* 12.202	30.67	MAv1	39	-20.1	49.57	54	-4.43	-	-	81	102	H
1	* 5.042	37.35	PK2	34.3	-26.2	45.45	-	-	74	-28.55	125	145	H
	* 5.042	25.57	MAv1	34.3	-26.2	33.67	54	-20.33	-	-	125	145	H
4	* 7.321	43.33	PK2	35.8	-24.6	54.53	-	-	74	-19.47	314	308	V
	* 7.319	35.98	MAv1	35.7	-24.7	46.98	54	-7.02	-	-	314	308	V
6	* 12.203	37.81	PK2	39	-20.1	56.71	-	-	74	-17.29	315	106	V
	* 12.198	28.4	MAv1	39	-20.1	47.3	54	-6.7	-	-	315	106	V
5	* 9.402	22.36	MAv1	36.5	-21.3	37.56	54	-16.44	-	-	133	178	V
	9.545	33.8	PK2	36.8	-20.9	49.7	-	-	-	-	133	178	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

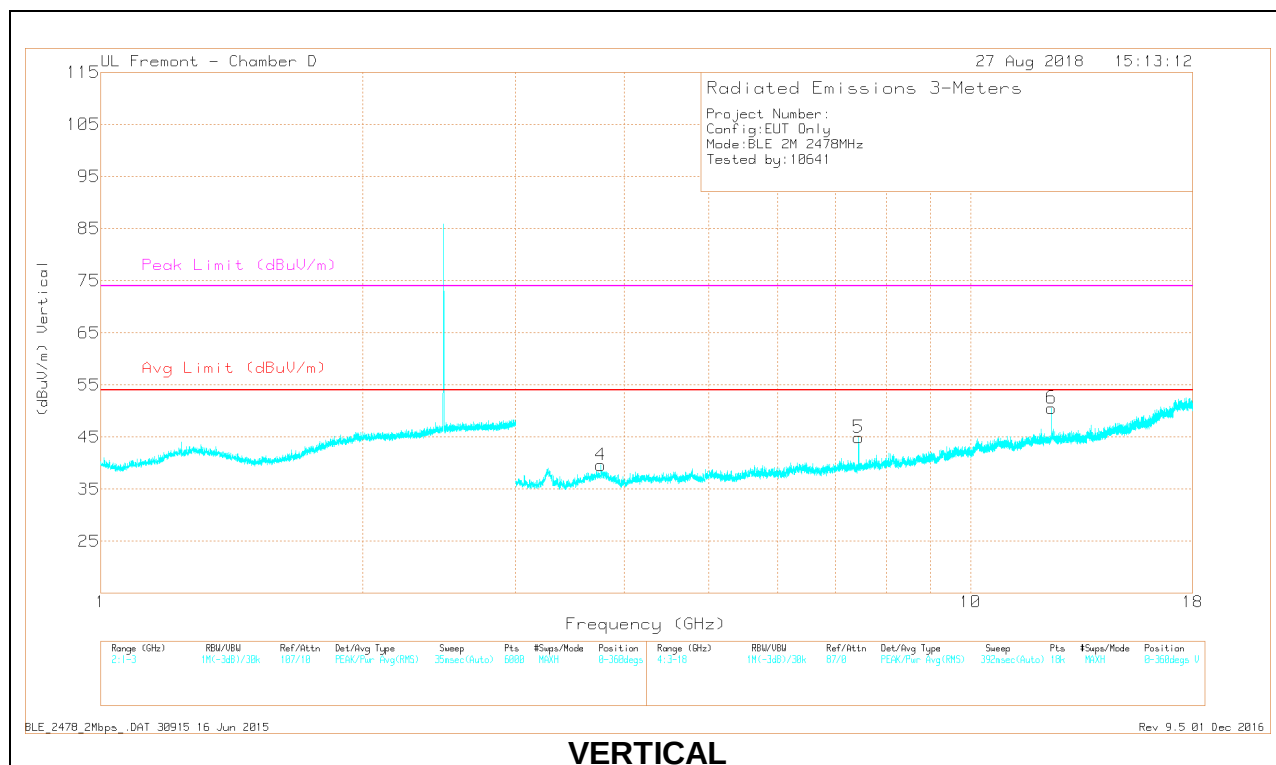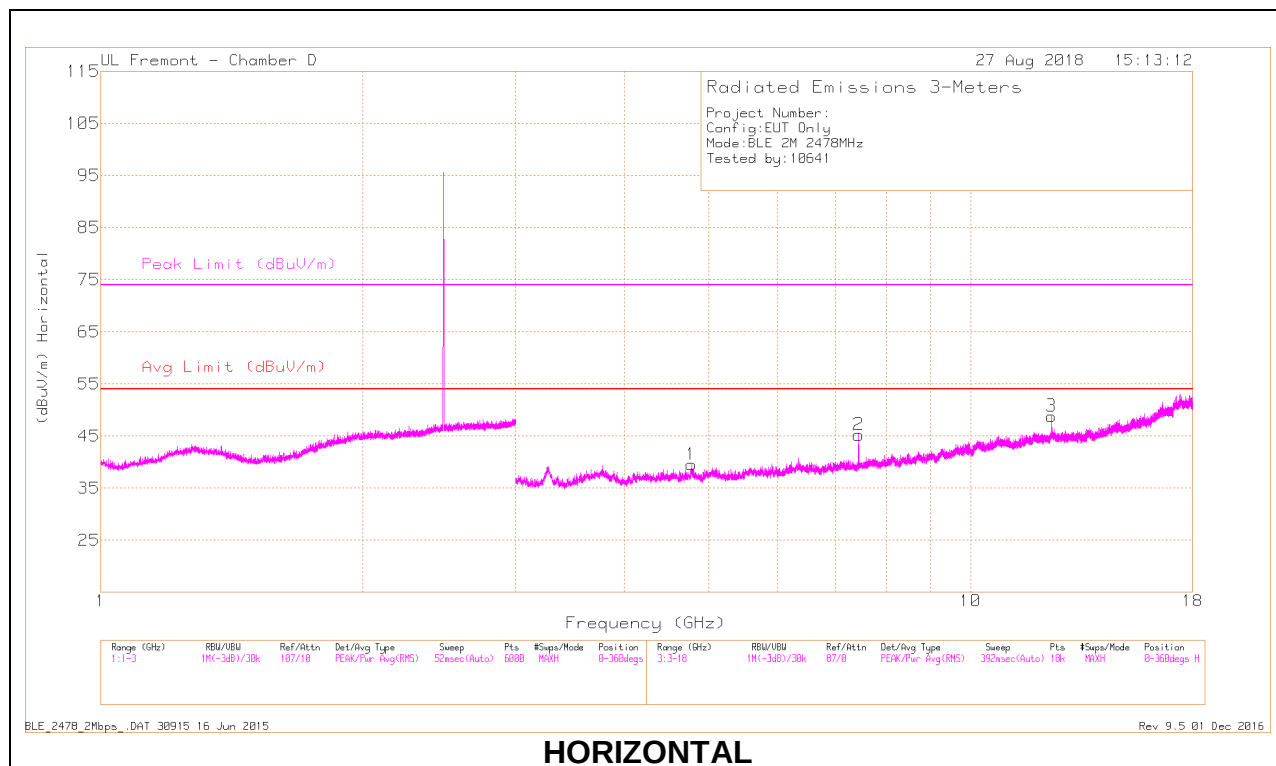

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.779	37	PK2	34.3	-26.2	45.1	-	-	74	-28.9	175	155	H
	* 4.776	25.59	MAv1	34.3	-26.2	33.69	54	-20.31	-	-	175	155	H
2	* 7.435	40.66	PK2	35.9	-24.1	52.46	-	-	74	-21.54	63	107	H
	* 7.435	31.3	MAv1	35.9	-24.2	43	54	-11	-	-	63	107	H
3	* 12.392	37.42	PK2	39	-19.7	56.72	-	-	74	-17.28	268	101	H
	* 12.392	27.41	MAv1	39	-19.7	46.71	54	-7.29	-	-	268	101	H
4	* 3.757	38.24	PK2	33.9	-27.9	44.24	-	-	74	-29.76	312	229	V
	* 3.759	26.13	MAv1	33.9	-27.9	32.13	54	-21.87	-	-	312	229	V
5	* 7.435	40.48	PK2	35.9	-24.2	52.18	-	-	74	-21.82	114	273	V
	* 7.435	32.36	MAv1	35.9	-24.2	44.06	54	-9.94	-	-	114	273	V
6	* 12.392	37.48	PK2	39	-19.7	56.78	-	-	74	-17.22	151	116	V
	* 12.392	28.06	MAv1	39	-19.7	47.36	54	-6.64	-	-	151	116	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

9.3. Worst Case Below 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

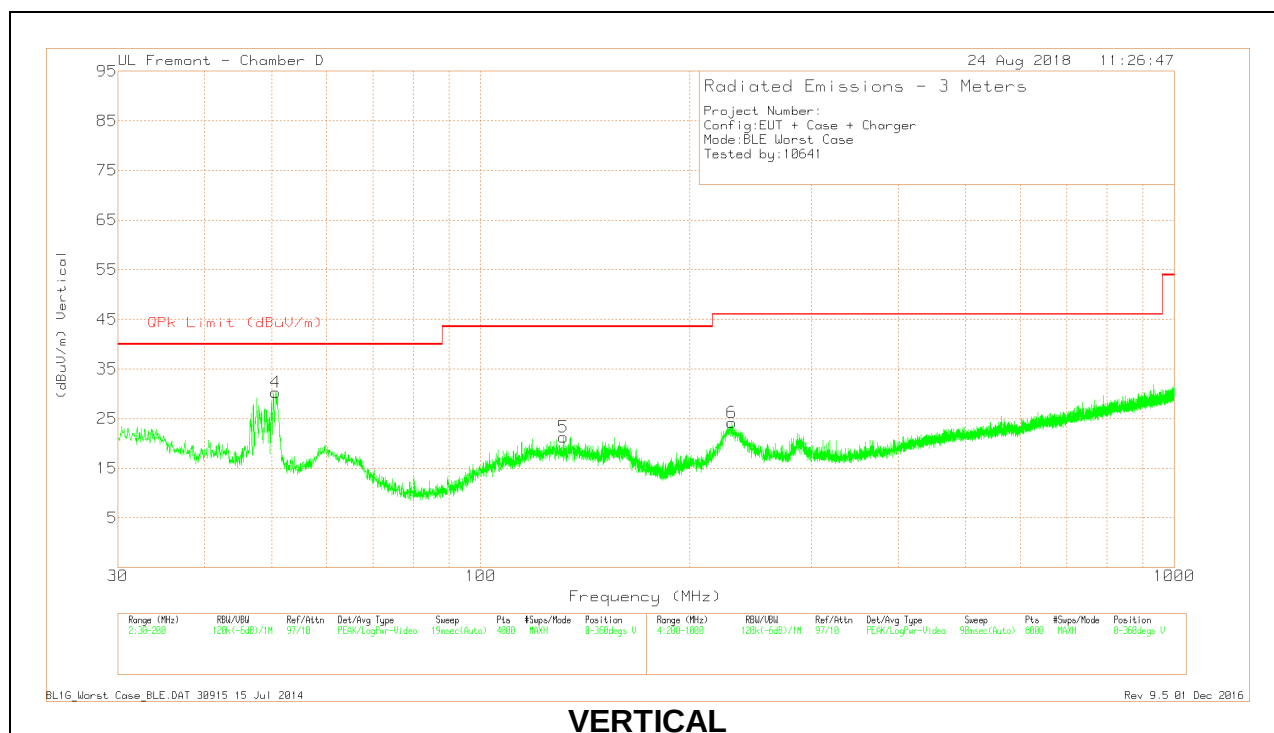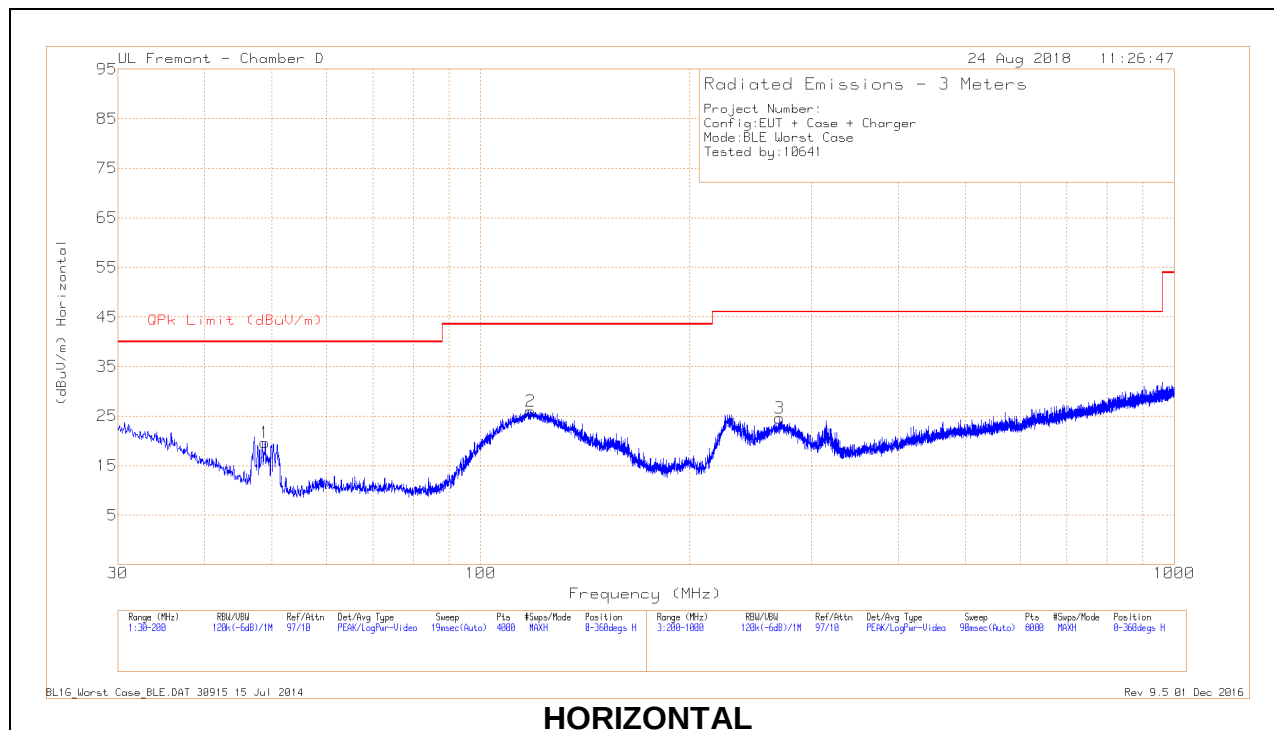

Below 1GHz Data



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 118.0828	37.39	Pk	19.5	-30.9	25.99	43.52	-17.53	0-360	199	H
5	* 131.7076	32.6	Pk	19.4	-30.7	21.3	43.52	-22.22	0-360	100	V
3	* 269.7091	35.26	Pk	19.1	-29.8	24.56	46.02	-21.46	0-360	101	H
1	48.8749	36.83	Pk	14.3	-31.5	19.63	40	-20.37	0-360	399	H
4	50.6603	48.23	Pk	13.6	-31.5	30.33	40	-9.67	0-360	100	V
6	230.2039	37.33	Pk	16.9	-30	24.23	46.02	-21.79	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

9.4. Worst Case 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

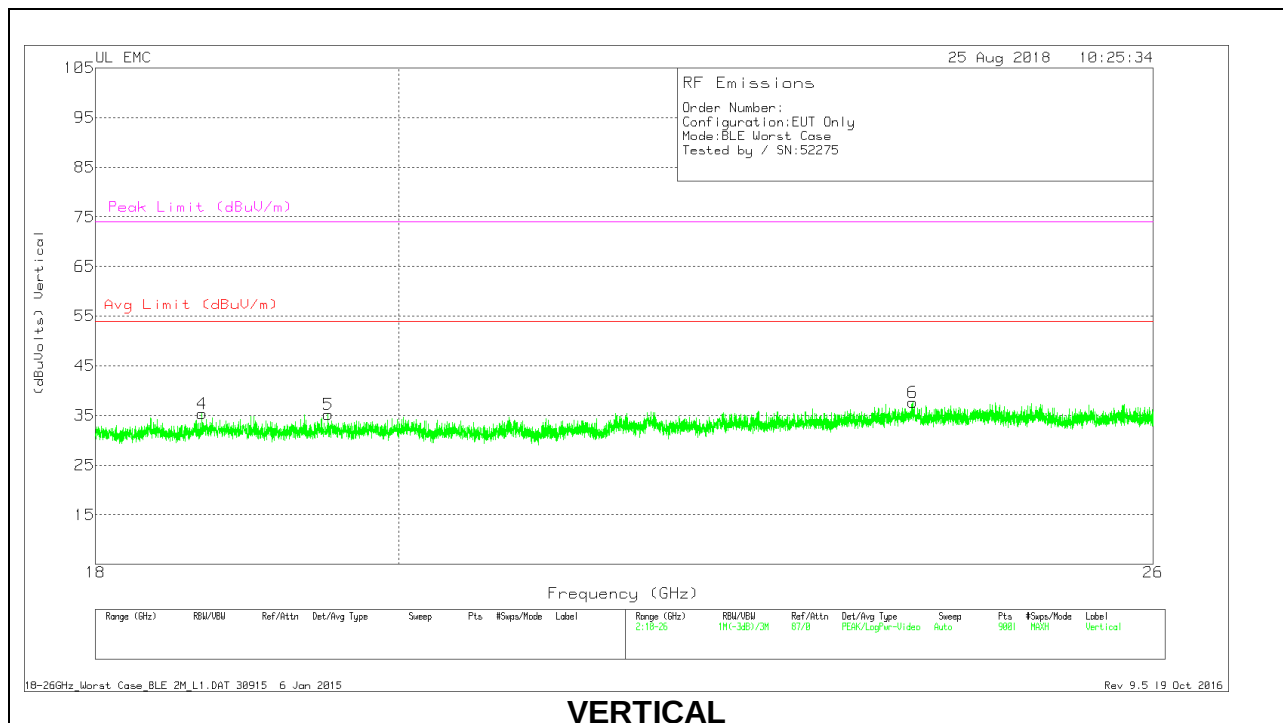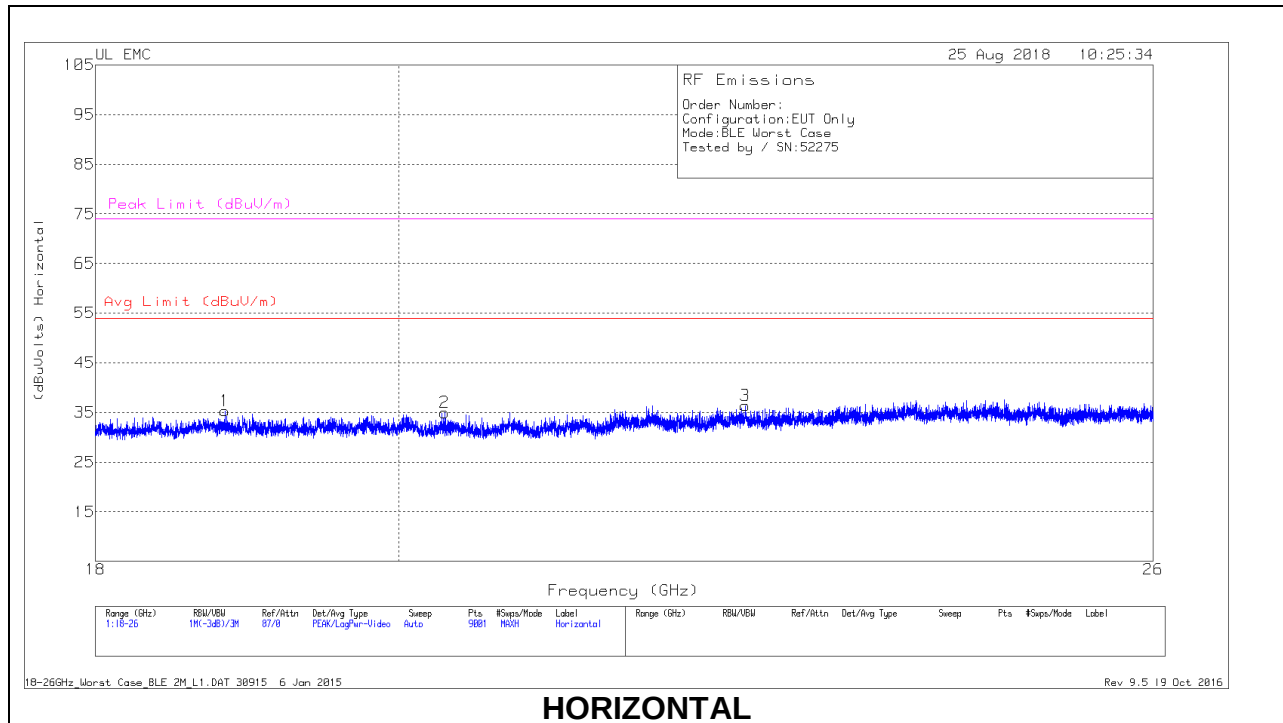

18 – 26GHz DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	T89 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.828	37.42	Pk	32.4	-25	-9.5	35.32	54	-18.68	74	-38.68
2	20.323	37.27	Pk	32.6	-25.4	-9.5	34.97	54	-19.03	74	-39.03
3	22.563	37.37	Pk	33.3	-24.8	-9.5	36.37	54	-17.63	74	-37.63
4	18.679	36.99	Pk	32.5	-24.6	-9.5	35.39	54	-18.61	74	-38.61
5	19.516	37.32	Pk	32.5	-25.1	-9.5	35.22	54	-18.78	74	-38.78
6	23.916	37.63	Pk	33.4	-23.9	-9.5	37.63	54	-16.37	74	-36.37

Pk - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

10.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE

LINE 1 RESULTS

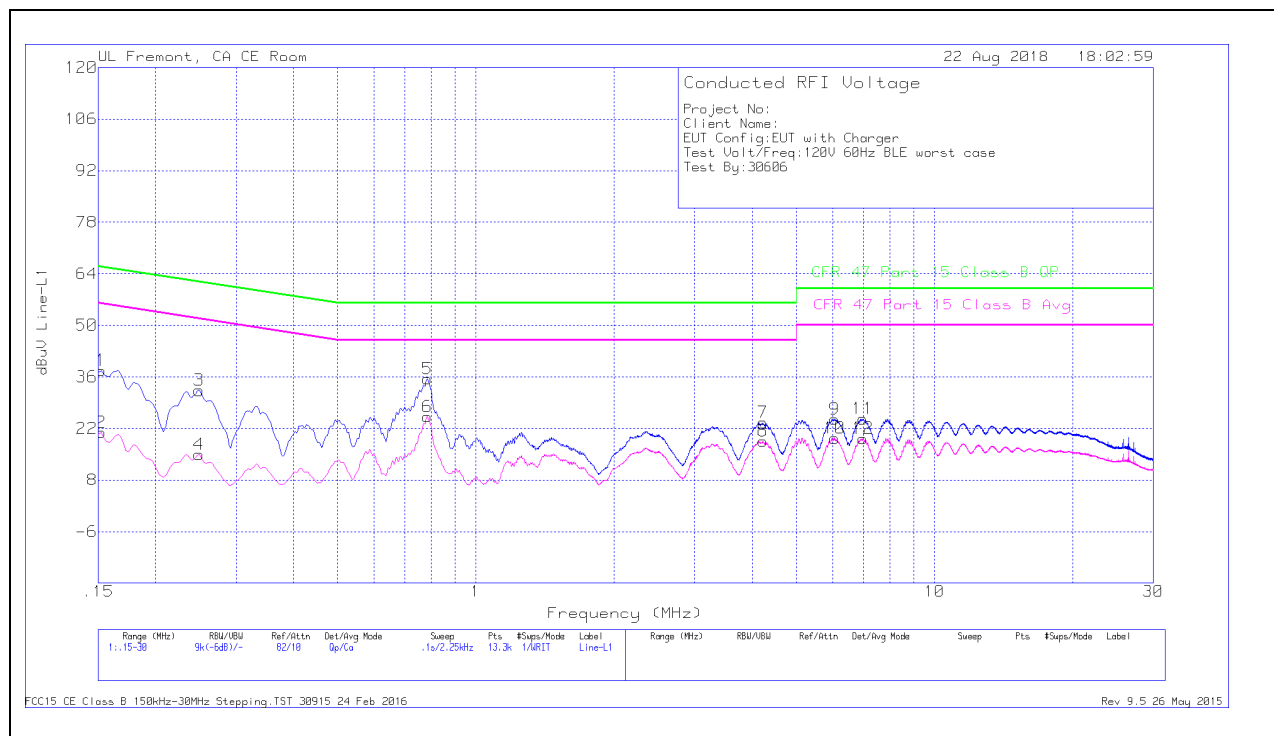


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.15225	27.55	Qp	.1	0	10.1	37.75	65.88	-28.13	-	-
2	.15225	10.7	Ca	.1	0	10.1	20.9	-	-	55.88	-34.98
3	.249	22.24	Qp	0	0	10.1	32.34	61.79	-29.45	-	-
4	.249	4.82	Ca	0	0	10.1	14.92	-	-	51.79	-36.87
5	.7845	25.35	Qp	0	0	10.1	35.45	56	-20.55	-	-
6	.7845	15.1	Ca	0	0	10.1	25.2	-	-	46	-20.8
7	4.2225	13.39	Qp	0	.1	10.1	23.59	56	-32.41	-	-
8	4.2225	8.4	Ca	0	.1	10.1	18.6	-	-	46	-27.4
9	6.05625	14.12	Qp	0	.2	10.2	24.52	60	-35.48	-	-
10	6.05625	8.93	Ca	0	.2	10.2	19.33	-	-	50	-30.67
11	6.97875	14.22	Qp	0	.2	10.2	24.62	60	-35.38	-	-
12	6.9765	8.88	Ca	0	.2	10.2	19.28	-	-	50	-30.72

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

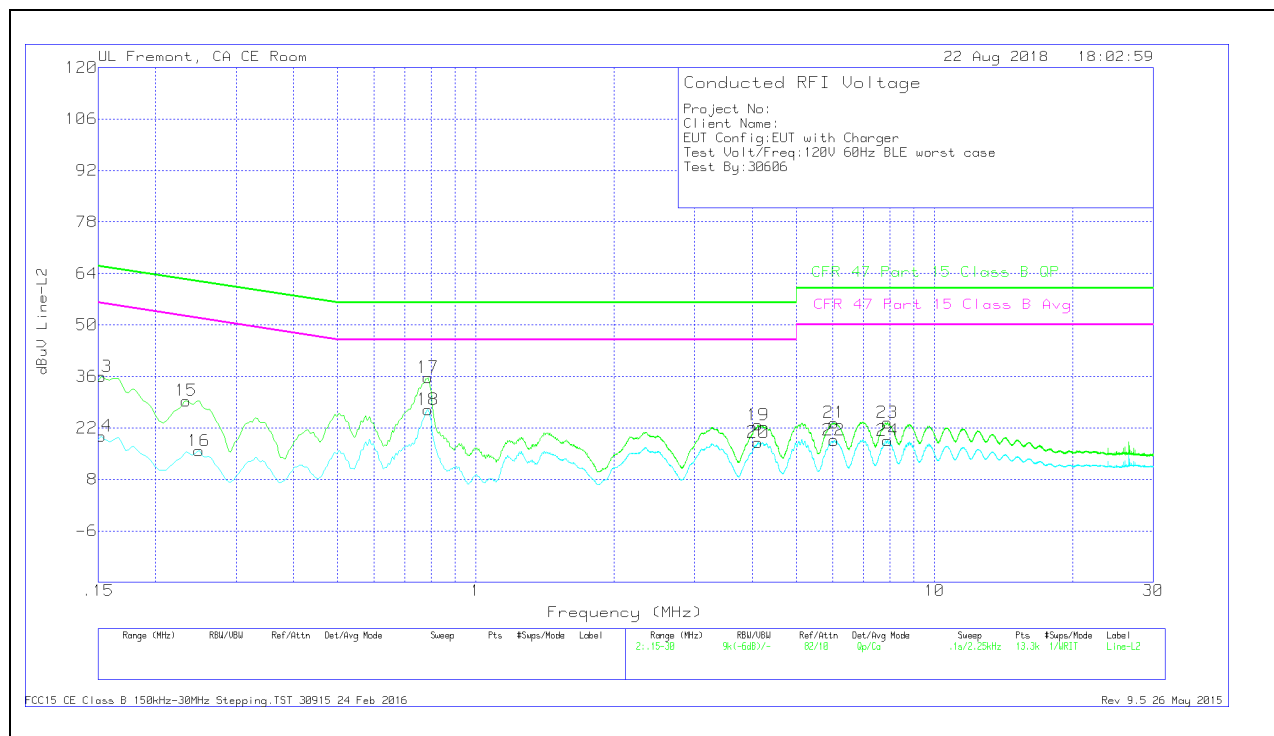


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.15225	25.77	Qp	.1	0	10.1	35.97	65.88	-29.91	-	-
14	.15225	9.59	Ca	.1	0	10.1	19.79	-	-	55.88	-36.09
15	.23325	19.3	Qp	0	0	10.1	29.4	62.33	-32.93	-	-
16	.249	5.71	Ca	0	0	10.1	15.81	-	-	51.79	-35.98
17	.78675	25.58	Qp	0	0	10.1	35.68	56	-20.32	-	-
18	.78675	16.85	Ca	0	0	10.1	26.95	-	-	46	-19.05
19	4.12575	12.6	Qp	0	.1	10.1	22.8	56	-33.2	-	-
20	4.12575	7.87	Ca	0	.1	10.1	18.07	-	-	46	-27.93
21	6.0405	13	Qp	0	.2	10.2	23.4	60	-36.6	-	-
22	6.0315	8.23	Ca	0	.2	10.2	18.63	-	-	50	-31.37
23	7.8945	13.03	Qp	0	.2	10.2	23.43	60	-36.57	-	-
24	7.908	8.16	Ca	0	.2	10.2	18.56	-	-	50	-31.44

Qp - Quasi-Peak detector

Ca - CISPR average detection

10.2. EUT POWERED BY HOST PC VIA USB CABLE

LINE 1 RESULTS

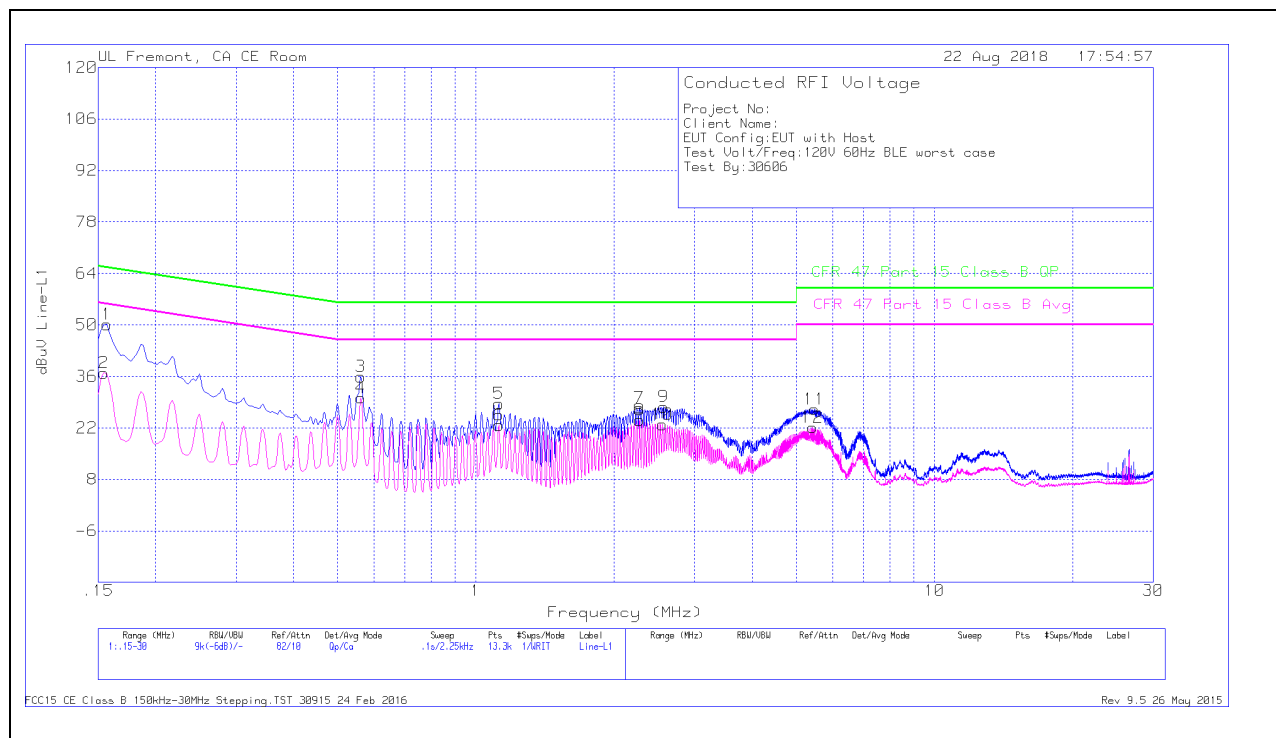


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.15675	39.92	Qp	.1	0	10.1	50.12	65.63	-15.51	-	-
2	.1545	26.75	Ca	.1	0	10.1	36.95	-	-	55.75	-18.8
3	.56175	25.82	Qp	0	0	10.1	35.92	56	-20.08	-	-
4	.56175	20.06	Ca	0	0	10.1	30.16	-	-	46	-15.84
5	1.122	18.37	Qp	0	.1	10.1	28.57	56	-27.43	-	-
6	1.122	12.54	Ca	0	.1	10.1	22.74	-	-	46	-23.26
7	2.274	17.23	Qp	0	.1	10.1	27.43	56	-28.57	-	-
8	2.274	13.93	Ca	0	.1	10.1	24.13	-	-	46	-21.87
9	2.5665	17.52	Qp	0	.1	10.1	27.72	56	-28.28	-	-
10	2.553	12.72	Ca	0	.1	10.1	22.92	-	-	46	-23.08
11	5.47125	16.86	Qp	0	.1	10.1	27.06	60	-32.94	-	-
12	5.41725	11.88	Ca	0	.1	10.1	22.08	-	-	50	-27.92

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

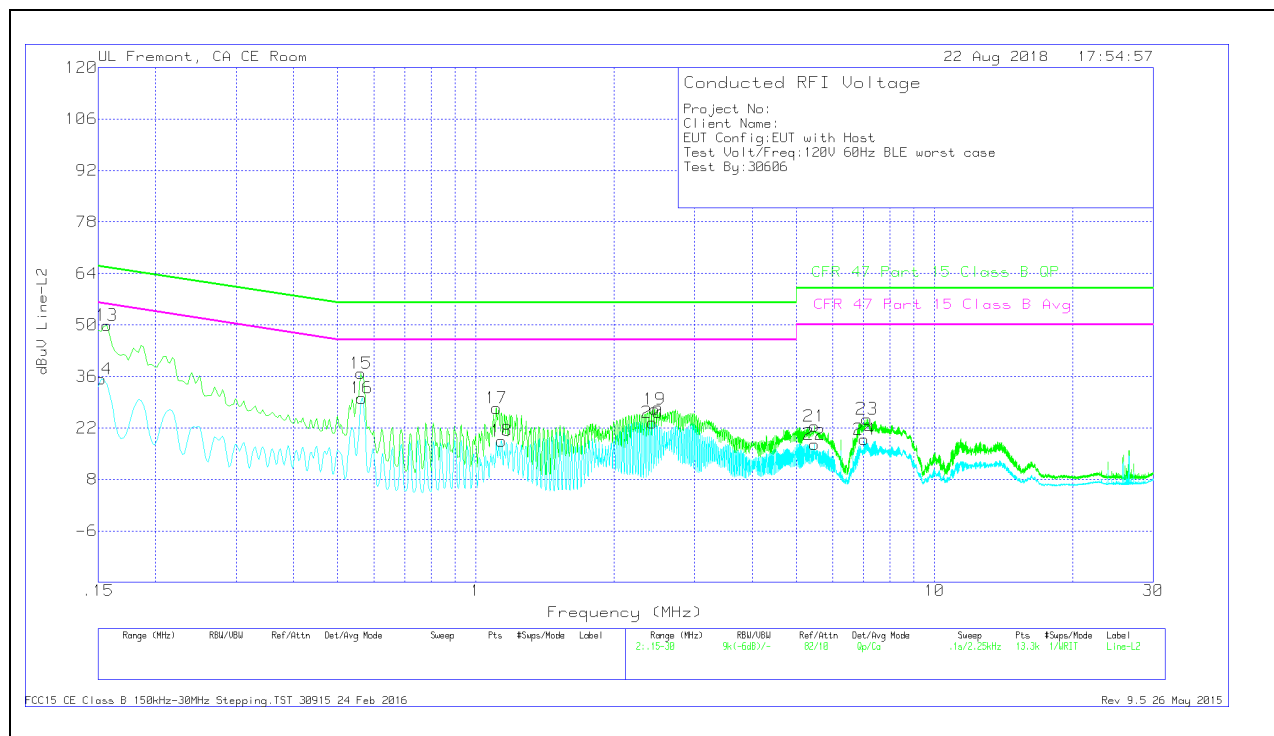

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.15675	39.66	Qp	.1	0	10.1	49.86	65.63	-15.77	-	-
14	.15225	25.07	Ca	.1	0	10.1	35.27	-	-	55.88	-20.61
15	.56175	26.73	Qp	0	0	10.1	36.83	56	-19.17	-	-
16	.564	20	Ca	0	0	10.1	30.1	-	-	46	-15.9
17	1.1085	17.16	Qp	0	.1	10.1	27.36	56	-28.64	-	-
18	1.13775	8.27	Ca	0	.1	10.1	18.47	-	-	46	-27.53
19	2.454	16.9	Qp	0	.1	10.1	27.1	56	-28.9	-	-
20	2.42475	13.23	Ca	0	.1	10.1	23.43	-	-	46	-22.57
21	5.47125	12.25	Qp	0	.1	10.1	22.45	60	-37.55	-	-
22	5.47125	7.38	Ca	0	.1	10.1	17.58	-	-	50	-32.42
23	7.12725	13.99	Qp	0	.2	10.2	24.39	60	-35.61	-	-
24	7.03275	8.46	Ca	0	.2	10.2	18.86	-	-	50	-31.14

Qp - Quasi-Peak detector

Ca - CISPR average detection

END OF REPORT

11. SETUP PHOTOS

Please refer to 12458150-EP1V1 for setup photos