



SAR EVALUATION REPORT

Applicant Name:
Apple, Inc.
One Apple Park Way
Cupertino, CA 95014
USA

Date of Testing:
06/24/19 - 07/15/19
Test Site/Location:
PCTEST Lab, Morgan Hill, CA, USA
Document Serial No.:
1C1905130010-01-R2.BCG

FCC ID: BCG-A2095

APPLICANT: APPLE, INC.


DUT Type: Watch
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: A2095

Equipment Class	Band & Mode	Tx Frequency	SAR	
			1g Head (W/kg)	10g Extremity (W/kg)
PCT	UMTS 850	826.40 - 846.60 MHz	< 0.1	0.18
PCT	UMTS 1750	1712.4 - 1752.6 MHz	0.28	0.12
PCT	UMTS 1900	1852.4 - 1907.6 MHz	0.43	< 0.1
PCT	LTE Band 12	699.7 - 715.3 MHz	< 0.1	0.20
PCT	LTE Band 17	706.5 - 713.5 MHz	N/A	N/A
PCT	LTE Band 13	779.5 - 784.5 MHz	< 0.1	0.27
PCT	LTE Band 26 (Cell)	814.7 - 848.3 MHz	< 0.1	0.21
PCT	LTE Band 5 (Cell)	824.7 - 848.3 MHz	< 0.1	0.19
PCT	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.27	< 0.1
PCT	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A
PCT	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.34	0.11
PCT	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A
PCT	LTE Band 7	2502.5 - 2567.5 MHz	0.59	0.24
PCT	LTE Band 41	2498.5 - 2687.5 MHz	0.35	0.12
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.21	0.10
DSS/DTSS	Bluetooth	2402 - 2480 MHz	0.14	< 0.1
Simultaneous SAR per KDB 690783 D01v01r03:			0.80	0.37

Note: This revised Test Report (S/N: 1C1905130010-01-R2.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This watch has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 1 of 72

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	7
3	INTRODUCTION	8
4	DOSIMETRIC ASSESSMENT	9
5	TEST CONFIGURATION POSITIONS	10
6	RF EXPOSURE LIMITS	11
7	FCC MEASUREMENT PROCEDURES.....	12
8	RF CONDUCTED POWERS.....	16
9	SYSTEM VERIFICATION.....	39
10	SAR DATA SUMMARY	43
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	64
12	SAR MEASUREMENT VARIABILITY	67
13	EQUIPMENT LIST.....	68
14	MEASUREMENT UNCERTAINTIES.....	69
15	CONCLUSION.....	70
16	REFERENCES	71
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 2 of 72

1 DEVICE UNDER TEST

1.1 Device Overview

Table 1.1 Summary EUT Bands/Modes

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 3 of 72

Table 1.3.1 Summary Max Conducted Powers – UMTS Mode

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	25.0	25.0	25.0
	Nominal	24.0	24.0	24.0
UMTS Band 4 (1750 MHz)	Maximum	24.0	24.0	24.0
	Nominal	23.0	23.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	24.0	24.0	24.0
	Nominal	23.0	23.0	23.0

Table 1.3.2 Summary Max Conducted Powers – LTE Mode

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	25.0
	Nominal	24.0
LTE Band 17	Maximum	25.0
	Nominal	24.0
LTE Band 13	Maximum	25.0
	Nominal	24.0
LTE Band 26 (Cell)	Maximum	25.0
	Nominal	24.0
LTE Band 5 (Cell)	Maximum	25.0
	Nominal	24.0
LTE Band 66 (AWS)	Maximum	24.0
	Nominal	23.0
LTE Band 4 (AWS)	Maximum	24.0
	Nominal	23.0
LTE Band 25 (PCS)	Maximum	24.0
	Nominal	23.0
LTE Band 2 (PCS)	Maximum	24.0
	Nominal	23.0
LTE Band 7	Maximum	23.5
	Nominal	22.5
LTE Band 41	Maximum	23.5
	Nominal	22.5

Table 1.3.3 Summary Max Conducted Powers – WiFi Mode

Mode / Band		Modulated Average (dBm)				
		Ch. 1	Ch. 2-10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	19.0				18.0
IEEE 802.11g (2.4 GHz)	Maximum	17.5	18.5	17.0	15.0	7.0
IEEE 802.11n (2.4 GHz)	Maximum	17.5	18.5	17.0	15.0	7.0

FCC ID: BCG-A2095	 SAR EVALUATION REPORT				Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch			Page 4 of 72

Table 1.3.4 Summary Max Conducted Powers – Bluetooth Mode

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE	Maximum	17.5
Bluetooth EDR	Maximum	13.0
Bluetooth HDR4	Maximum	12.5
Bluetooth HDR8	Maximum	10.0

1.4 DUT Antenna Locations

The diagram showing the location of the device antennas can be found in Appendix F.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-1
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Extremity
1	UMTS + 2.4 GHz Wi-Fi	Yes	Yes
2	UMTS + 2.4 GHz Bluetooth	Yes	Yes
3	LTE + 2.4 GHz Wi-Fi	Yes	Yes
4	LTE + 2.4 GHz Bluetooth	Yes	Yes

1. 2.4 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. All licensed modes share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN scenario.
4. This device supports VoLTE and VoWiFi.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 5 of 72

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

This device supports channel 1-13 for 2.4 GHz WLAN. However, since channels 12 and 13 have equal or less maximum output power, channels 1, 6, and 11 were considered for SAR testing per KDB 248227 D01v02r02.

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04. This device is limited to 27 RB on the uplink for 16QAM modulation. Additional measurements were evaluated to support SAR test exclusion for 16 QAM as described in Section 7.5.4.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.8 Guidance Applied

- FCC KDB Publication 941225 D01v03r01, D05v02r04 (3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance, Wrist-worn Device Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

1.10 Device Housing Types and Wristband Types

This device has four housing types that were evaluated independently for SAR: Aluminum, Stainless Steel, Titanium, and Ceramic. The device can also be used with different wristband accessories. The non-metallic wrist accessory, sport band, was evaluated for all exposure conditions. The available metallic wrist accessories, metal links band and metal loop band, were additionally evaluated.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 6 of 72

2

LTE INFORMATION

LTE Information					
Form Factor	Watch				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 7 (2502.5 - 2567.5 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
Channel Bandwidths	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)		Low	Low-Mid	Mid	Mid-High
LTE Band 12: 1.4 MHz		699.7 (23017)		707.5 (23095)	715.3 (23173)
LTE Band 12: 3 MHz		700.5 (23025)		707.5 (23095)	714.5 (23165)
LTE Band 12: 5 MHz		701.5 (23035)		707.5 (23095)	713.5 (23155)
LTE Band 12: 10 MHz		704 (23060)		707.5 (23095)	711 (23130)
LTE Band 17: 5 MHz		706.5 (23755)		710 (23790)	713.5 (23825)
LTE Band 17: 10 MHz		709 (23780)		710 (23790)	711 (23800)
LTE Band 13: 5 MHz		779.5 (23205)		782 (23230)	784.5 (23255)
LTE Band 13: 10 MHz		N/A		782 (23230)	N/A
LTE Band 26 (Cell): 1.4 MHz		814.7 (26697)		831.5 (26865)	848.3 (27033)
LTE Band 26 (Cell): 3 MHz		815.5 (26705)		831.5 (26865)	847.5 (27025)
LTE Band 26 (Cell): 5 MHz		816.5 (26715)		831.5 (26865)	846.5 (27015)
LTE Band 26 (Cell): 10 MHz		819 (26740)		831.5 (26865)	844 (26990)
LTE Band 5 (Cell): 1.4 MHz		824.7 (20407)		836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz		825.5 (20415)		836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz		826.5 (20425)		836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz		829 (20450)		836.5 (20525)	844 (20600)
LTE Band 66 (AWS): 1.4 MHz		1710.7 (131979)		1745 (132322)	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz		1711.5 (131987)		1745 (132322)	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz		1712.5 (131997)		1745 (132322)	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz		1715 (132022)		1745 (132322)	1775 (132622)
LTE Band 66 (AWS): 15 MHz		1717.5 (132047)		1745 (132322)	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz		1720 (132072)		1745 (132322)	1770 (132572)
LTE Band 4 (AWS): 1.4 MHz		1710.7 (19957)		1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz		1711.5 (19965)		1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz		1712.5 (19975)		1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz		1715 (20000)		1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz		1717.5 (20025)		1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz		1720 (20050)		1732.5 (20175)	1745 (20300)
LTE Band 25 (PCS): 1.4 MHz		1850.7 (26047)		1882.5 (26365)	1914.3 (26683)
LTE Band 25 (PCS): 3 MHz		1851.5 (26055)		1882.5 (26365)	1913.5 (26675)
LTE Band 25 (PCS): 5 MHz		1852.5 (26065)		1882.5 (26365)	1912.5 (26665)
LTE Band 25 (PCS): 10 MHz		1855 (26090)		1882.5 (26365)	1910 (26640)
LTE Band 25 (PCS): 15 MHz		1857.5 (26115)		1882.5 (26365)	1907.5 (26615)
LTE Band 25 (PCS): 20 MHz		1860 (26140)		1882.5 (26365)	1905 (26590)
LTE Band 2 (PCS): 1.4 MHz		1850.7 (18607)		1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz		1851.5 (18615)		1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz		1852.5 (18625)		1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz		1855 (18650)		1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz		1857.5 (18675)		1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz		1860 (18700)		1880 (18900)	1900 (19100)
LTE Band 7: 5 MHz		2502.5 (20775)		2535 (21100)	2567.5 (21425)
LTE Band 7: 10 MHz		2505 (20800)		2535 (21100)	2565 (21400)
LTE Band 7: 15 MHz		2507.5 (20825)		2535 (21100)	2562.5 (21375)
LTE Band 7: 20 MHz		2510 (20850)		2535 (21100)	2560 (21350)
LTE Band 41: 5 MHz		2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 10 MHz		2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 15 MHz		2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 20 MHz		2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
UE Category		1			
Modulations Supported in UL		QPSK, 16QAM			
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)		YES			
A-MPR (Additional MPR) disabled for SAR Testing?		YES			
LTE Additional Information		This device does not support full CA features on 3GPP Release 12. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 12 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eCIC, WiFi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.			

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 7 of 72

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 8 of 72

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(n-1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 9 of 72

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. Additionally, a manufacturer provided low-loss foam was used to position the device for head SAR evaluations.

5.2 Positioning for Head

Devices that are designed to be worn on the wrist may operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. When next-to-mouth SAR evaluation is required, the device is positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The device is evaluated with wrist bands strapped together to represent normal use conditions.

5.3 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. When extremity SAR evaluation is required, the device is evaluated with the back of the device touching the flat phantom, which is filled with body tissue-equivalent medium. The device was evaluated with Sport wristband unstrapped and touching the phantom. For Metal Loop and Metal Links wristbands, the device was evaluated with wristbands strapped and the distance between wristbands and the phantom was minimized to represent the spacing created by actual use conditions.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 10 of 72

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 11 of 72

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 12 of 72

7.4.2 Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

7.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 13 of 72

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg for 1g SAR and > 3.625 W/kg for 10g SAR, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg for 1g SAR and < 2.0 W/kg for 10g SAR.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg for 1g SAR and < 3.625 W/kg for 10g SAR.
- e. This device can only operate with 16 QAM on the uplink with less than or equal to 27 RB. For 16 QAM configurations with 10 MHz, 15 MHz, and 20 MHz bandwidths, LTE powers for RB size of 15 ("50% RB") and 27 ("100% RB") with offsets to upper edge, middle, and lower edge of the channel are additionally measured for both QPSK and 16 QAM modulations to support comparison and SAR test exclusion per section 5.2.4 and 5.3.

7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 14 of 72

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 15 of 72

8 RF CONDUCTED POWERS

8.1 UMTS Conducted Powers

Table 8-1
Maximum Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.38	24.47	24.45	23.36	23.35	23.41	23.40	23.25	23.08	-
99		12.2 kbps AMR	24.43	24.34	24.33	23.40	23.34	23.50	23.50	23.25	23.29	-
6	HSDPA	Subtest 1	24.50	24.25	24.33	23.27	23.31	23.50	23.46	23.31	23.16	0
6		Subtest 2	23.69	23.50	23.56	22.38	22.28	22.48	22.50	22.23	22.17	0
6		Subtest 3	23.21	23.01	23.00	21.73	21.74	21.95	22.01	21.77	21.60	0.5
6		Subtest 4	22.96	22.75	22.78	21.58	21.59	21.79	21.78	21.55	21.51	0.5
6	HSUPA	Subtest 1	23.24	23.02	23.04	22.69	22.73	22.82	22.91	22.68	22.56	0
6		Subtest 2	21.38	21.12	21.14	20.50	20.53	20.61	20.25	20.01	20.03	2
6		Subtest 3	22.40	22.17	22.25	21.14	21.19	21.41	21.38	21.10	21.02	1
6		Subtest 4	21.66	21.52	21.51	20.55	20.52	20.75	20.80	20.62	20.51	2
6		Subtest 5	23.54	23.51	23.56	22.61	22.56	22.78	22.84	22.64	22.52	0

This device does not support DC-HSDPA.




Figure 8-1
Power Measurement Setup

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 16 of 72

8.2 LTE Conducted Powers

8.2.1

LTE Band 12

Table 8-2
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Design MPR [dB]
			23095 (707.5 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.18	0
	1	25	24.24	0
	1	49	24.11	0
	25	0	23.43	1
	25	12	23.41	1
	25	25	23.37	1
	50	0	23.42	1
	15	0	23.32	1
	15	17	23.23	1
	15	35	23.40	1
	27	0	23.22	1
	27	12	23.15	1
	27	23	23.32	1
16QAM	1	0	23.13	1
	1	25	23.02	1
	1	49	23.10	1
	25	0	21.95	2
	25	12	21.79	2
	25	25	21.97	2
	50	0	21.97	2
	15	0	21.95	2
	15	17	21.81	2
	15	35	22.05	2
	27	0	21.83	2
	27	12	21.78	2
	27	23	21.92	2

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 17 of 72

Table 8-3
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.23	23.95	24.08	0
	1	12	24.27	23.84	24.09	0
	1	24	24.24	23.81	23.94	0
	12	0	23.39	23.11	23.45	1
	12	6	23.37	23.14	23.45	1
	12	13	23.25	23.22	23.36	1
	25	0	23.38	23.18	23.35	1
16QAM	1	0	23.15	23.26	23.08	1
	1	12	23.45	23.07	23.08	1
	1	24	23.46	22.79	23.03	1
	12	0	22.26	21.81	22.05	2
	12	6	22.19	21.76	22.02	2
	12	13	22.06	21.90	22.09	2
	25	0	22.09	21.79	22.10	2

Table 8-4
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

LTE Band 12 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.00	23.82	24.11	0
	1	7	24.00	23.77	24.06	0
	1	14	24.06	23.79	23.98	0
	8	0	23.39	23.10	23.37	1
	8	4	23.40	23.13	23.36	1
	8	7	23.40	23.19	23.32	1
	15	0	23.43	23.15	23.31	1
16QAM	1	0	23.07	23.04	23.18	1
	1	7	23.18	23.01	23.14	1
	1	14	23.23	22.84	23.28	1
	8	0	22.07	21.69	22.07	2
	8	4	22.06	21.66	22.02	2
	8	7	21.99	21.74	21.96	2
	15	0	22.00	21.77	22.01	2

FCC ID: BCG-A2095		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 18 of 72

Table 8-5
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

LTE Band 12 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.01	23.82	24.11	0
	1	2	24.01	23.80	24.08	0
	1	5	24.05	23.79	24.08	0
	3	0	24.26	24.03	24.17	0
	3	2	24.24	24.00	24.15	0
	3	3	24.26	24.03	24.16	0
	6	0	23.40	23.12	23.26	1
16QAM	1	0	23.18	22.96	22.95	1
	1	2	23.16	23.06	22.78	1
	1	5	23.20	22.83	23.12	1
	3	0	23.06	22.87	23.08	1
	3	2	23.09	22.76	22.90	1
	3	3	23.18	22.78	22.89	1
	6	0	22.14	21.83	22.10	2

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 19 of 72

8.2.2

LTE Band 13

Table 8-6
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Design MPR [dB]
			23230 (782.0 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.28	0
	1	25	24.15	0
	1	49	24.16	0
	25	0	23.45	1
	25	12	23.37	1
	25	25	23.41	1
	50	0	23.44	1
	15	0	23.40	1
	15	17	23.37	1
	15	35	23.27	1
	27	0	23.35	1
	27	12	23.28	1
	27	23	23.21	1
16QAM	1	0	23.50	1
	1	25	23.43	1
	1	49	23.17	1
	25	0	22.35	2
	25	12	22.21	2
	25	25	22.19	2
	50	0	22.49	2
	15	0	22.48	2
	15	17	22.50	2
	15	35	22.29	2
	27	0	22.28	2
	27	12	22.29	2
	27	23	22.14	2

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 20 of 72

Table 8-7
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Design MPR [dB]
			23230 (782.0 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.23	0
	1	12	24.07	0
	1	24	23.99	0
	12	0	23.41	1
	12	6	23.42	1
	12	13	23.38	1
	25	0	23.33	1
16QAM	1	0	23.44	1
	1	12	23.46	1
	1	24	23.33	1
	12	0	22.46	2
	12	6	22.41	2
	12	13	22.50	2
	25	0	22.35	2

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 21 of 72

8.2.3

LTE Band 26 (Cell)

Table 8-8
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.07	24.04	24.17	0
	1	25	24.06	24.03	24.10	0
	1	49	23.97	24.08	24.13	0
	25	0	23.36	23.32	23.38	1
	25	12	23.35	23.34	23.36	1
	25	25	23.33	23.33	23.37	1
	50	0	23.35	23.35	23.36	1
	15	0	23.36	23.38	23.31	1
	15	17	23.21	23.30	23.36	1
	15	35	23.31	23.19	23.30	1
	27	0	23.23	23.30	23.30	1
	27	12	23.22	23.23	23.31	1
27	23	23.20	23.18	23.30	1	
16QAM	1	0	23.06	23.23	22.84	1
	1	25	22.91	23.16	22.98	1
	1	49	22.64	22.92	23.12	1
	25	0	21.87	21.85	21.91	2
	25	12	21.78	21.83	21.88	2
	25	25	21.78	21.70	21.88	2
	50	0	21.89	21.94	21.92	2
	15	0	21.90	21.97	21.87	2
	15	17	21.76	21.92	21.91	2
	15	35	21.89	21.79	21.85	2
	27	0	21.88	21.77	21.90	2
	27	12	21.86	21.70	21.91	2
27	23	21.79	21.71	21.90	2	

Table 8-9
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 26 (Cell) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.29	24.10	24.00	0
	1	12	24.15	24.09	23.98	0
	1	24	23.97	24.04	23.90	0
	12	0	23.29	23.25	23.29	1
	12	6	23.25	23.23	23.24	1
	12	13	23.17	23.17	23.18	1
	25	0	23.26	23.21	23.24	1
16QAM	1	0	23.09	23.16	22.99	1
	1	12	23.18	23.21	22.96	1
	1	24	22.93	23.16	22.91	1
	12	0	21.91	21.85	21.85	2
	12	6	21.83	21.72	21.93	2
	12	13	21.89	21.77	21.86	2
	25	0	21.83	21.74	21.90	2

FCC ID: BCG-A2095	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 22 of 72

Table 8-10
LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 26 (Cell) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.99	23.90	23.96	0
	1	7	24.04	23.90	23.92	0
	1	14	23.86	23.83	23.79	0
	8	0	23.19	23.15	23.18	1
	8	4	23.17	23.14	23.15	1
	8	7	23.16	23.13	23.12	1
	15	0	23.20	23.17	23.17	1
16QAM	1	0	22.71	23.18	23.13	1
	1	7	22.81	22.96	23.02	1
	1	14	22.83	23.06	22.98	1
	8	0	21.77	21.74	21.81	2
	8	4	21.80	21.83	21.74	2
	8	7	21.80	21.77	21.86	2
	15	0	21.85	21.78	21.81	2

Table 8-11
LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 26 (Cell) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.01	23.90	24.05	0
	1	2	23.95	23.88	24.02	0
	1	5	23.99	23.89	23.94	0
	3	0	24.10	24.01	23.95	0
	3	2	24.03	23.95	23.88	0
	3	3	24.04	23.99	23.90	0
	6	0	23.23	23.17	23.11	1
16QAM	1	0	22.82	23.03	22.77	1
	1	2	22.76	22.98	22.69	1
	1	5	23.07	23.23	22.58	1
	3	0	22.87	22.94	22.83	1
	3	2	22.78	22.82	22.75	1
	3	3	22.81	22.85	22.69	1
	6	0	21.97	21.90	21.82	2

FCC ID: BCG-A2095	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 23 of 72

8.2.4

LTE Band 5 (Cell)

Table 8-12
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Design MPR [dB]
			20525 (836.5 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.18	0
	1	25	24.14	0
	1	49	24.10	0
	25	0	23.36	1
	25	12	23.33	1
	25	25	23.37	1
	50	0	23.32	1
	15	0	23.14	1
	15	17	23.04	1
	15	35	23.17	1
	27	0	23.05	1
	27	12	22.96	1
16QAM	27	23	23.10	1
	1	0	23.34	1
	1	25	23.11	1
	1	49	23.24	1
	25	0	22.01	2
	25	12	21.92	2
	25	25	22.04	2
	50	0	22.14	2
	15	0	22.18	2
	15	17	22.00	2
	15	35	22.14	2
	27	0	22.02	2
	27	12	21.96	2
	27	23	21.97	2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 24 of 72

Table 8-13
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.02	23.99	24.01	0
	1	12	24.07	23.79	23.86	0
	1	24	24.02	23.80	23.76	0
	12	0	23.28	23.04	23.27	1
	12	6	23.25	23.01	23.24	1
	12	13	23.27	23.03	23.17	1
	25	0	23.29	23.01	23.18	1
16QAM	1	0	23.39	23.22	23.21	1
	1	12	23.41	23.05	23.23	1
	1	24	23.31	23.02	23.06	1
	12	0	22.28	21.98	22.20	2
	12	6	22.26	21.92	22.23	2
	12	13	22.31	21.94	22.17	2
	25	0	22.19	21.98	22.20	2

Table 8-14
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 5 (Cell) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.86	23.75	23.96	0
	1	7	23.90	23.63	23.86	0
	1	14	23.91	23.58	23.71	0
	8	0	23.16	22.98	23.19	1
	8	4	23.20	22.98	23.15	1
	8	7	23.21	23.02	23.11	1
	15	0	23.25	22.99	23.17	1
16QAM	1	0	22.93	23.06	23.15	1
	1	7	23.08	23.16	23.33	1
	1	14	23.25	23.26	23.22	1
	8	0	22.04	21.99	22.11	2
	8	4	22.16	21.92	22.09	2
	8	7	22.23	21.95	22.10	2
	15	0	22.16	21.92	22.02	2

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 25 of 72

Table 8-15
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 5 (Cell) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.87	23.73	24.03	0
	1	2	23.86	23.69	23.86	0
	1	5	23.97	23.58	23.84	0
	3	0	23.95	23.75	23.82	0
	3	2	23.93	23.73	23.83	0
	3	3	23.92	23.75	23.82	0
	6	0	23.18	23.00	23.08	1
16QAM	1	0	23.23	23.31	23.14	1
	1	2	23.13	23.22	22.75	1
	1	5	23.29	23.13	22.95	1
	3	0	23.03	22.96	23.01	1
	3	2	22.95	22.83	22.86	1
	3	3	22.99	22.86	22.88	1
	6	0	22.25	21.93	22.10	2

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 26 of 72

8.2.5

LTE Band 66 (AWS)

Table 8-16
LTE Band 66 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.97	23.03	23.13	0
	1	50	22.79	23.12	23.18	0
	1	99	22.86	23.20	23.21	0
	50	0	22.15	22.17	22.34	1
	50	25	22.14	22.16	22.30	1
	50	50	22.19	22.22	22.28	1
	100	0	22.25	22.18	22.33	1
	15	0	23.10	23.05	23.16	0
	15	42	23.15	23.25	23.20	0
	15	85	23.01	23.20	23.11	0
	27	0	22.23	22.20	22.22	1
	27	37	22.27	22.32	22.37	1
27	73	22.15	22.30	22.28	1	
16QAM	1	0	22.41	22.38	22.48	1
	1	50	22.42	22.46	22.45	1
	1	99	22.43	22.50	22.49	1
	15	0	21.91	21.96	22.01	1
	15	42	22.00	22.13	22.03	1
	15	85	21.92	22.17	22.08	1
	27	0	21.04	21.00	21.02	2
	27	37	21.12	21.10	21.08	2
	27	73	21.03	21.13	21.11	2

Table 8-17
LTE Band 66 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.00	22.80	22.89	0
	1	36	23.02	22.96	23.07	0
	1	74	22.98	23.05	22.92	0
	36	0	22.24	22.23	22.27	1
	36	18	22.19	22.37	22.31	1
	36	37	22.23	22.26	22.32	1
	75	0	22.28	22.35	22.42	1
	15	0	23.01	23.06	23.08	0
	15	30	23.03	23.18	23.16	0
	15	60	22.96	23.13	23.06	0
	27	0	22.19	22.16	22.21	1
	27	24	22.18	22.31	22.32	1
27	48	22.19	22.24	22.25	1	
16QAM	1	0	22.07	22.03	22.37	1
	1	36	22.15	22.26	22.46	1
	1	74	22.16	22.47	22.44	1
	15	0	21.77	21.89	21.91	1
	15	30	21.86	22.12	22.05	1
	15	60	21.88	22.06	21.92	1
	27	0	20.91	20.99	21.07	2
	27	24	20.95	21.13	21.18	2
	27	48	21.03	21.06	21.14	2

FCC ID: BCG-A2095	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 27 of 72

Table 8-18
LTE Band 66 (AWS) Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.77	22.84	22.98	0
	1	25	22.71	22.94	23.06	0
	1	49	22.76	23.05	22.99	0
	25	0	22.28	22.27	22.35	1
	25	12	22.23	22.36	22.33	1
	25	25	22.18	22.27	22.30	1
	50	0	22.16	22.25	22.31	1
	15	0	22.22	22.29	22.36	1
	15	17	22.29	22.40	22.37	1
	15	35	22.29	22.32	22.32	1
	27	0	22.25	22.25	22.34	1
	27	12	22.17	22.27	22.35	1
27	23	22.18	22.24	22.32	1	
16QAM	1	0	22.18	22.25	22.39	1
	1	25	22.22	22.37	22.46	1
	1	49	22.28	22.41	22.48	1
	25	0	20.96	21.04	21.14	2
	25	12	20.94	21.14	21.15	2
	25	25	20.91	21.07	21.12	2
	50	0	21.34	21.48	21.39	2
	15	0	20.93	21.09	21.13	2
	15	17	20.97	21.18	21.12	2
	15	35	21.01	21.19	21.11	2
	27	0	20.94	21.04	21.12	2
	27	12	20.89	21.08	21.12	2
27	23	20.89	21.10	21.12	2	

Table 8-19
LTE Band 66 (AWS) Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.91	23.00	23.05	0
	1	12	22.87	23.08	23.06	0
	1	24	22.87	23.22	22.87	0
	12	0	22.13	22.37	22.31	1
	12	6	22.19	22.38	22.28	1
	12	13	22.22	22.33	22.25	1
	25	0	22.25	22.31	22.28	1
16QAM	1	0	22.38	22.42	22.46	1
	1	12	22.31	22.47	22.48	1
	1	24	22.23	22.50	22.49	1
	12	0	20.92	21.13	21.16	2
	12	6	20.96	21.17	21.15	2
	12	13	21.03	21.15	21.13	2
	25	0	21.01	21.09	21.16	2

FCC ID: BCG-A2095	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 28 of 72

Table 8-20
LTE Band 66 (AWS) Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.75	22.97	23.02	0
	1	7	22.75	23.00	23.00	0
	1	14	22.74	23.04	22.92	0
	8	0	22.14	22.33	22.29	1
	8	4	22.12	22.23	22.31	1
	8	7	22.18	22.26	22.29	1
	15	0	22.16	22.28	22.33	1
16QAM	1	0	22.37	22.29	22.48	1
	1	7	22.40	22.43	22.47	1
	1	14	22.27	22.48	22.48	1
	8	0	20.93	21.16	21.13	2
	8	4	20.93	21.11	21.22	2
	8	7	20.98	21.12	21.15	2
	15	0	20.95	21.05	21.11	2

Table 8-21
LTE Band 66 (AWS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.77	22.99	23.07	0
	1	2	22.76	22.99	23.07	0
	1	5	22.78	22.97	23.08	0
	3	0	22.96	23.14	23.04	0
	3	2	22.93	23.09	23.02	0
	3	3	22.89	23.11	23.04	0
	6	0	22.08	22.26	22.24	1
16QAM	1	0	22.33	22.41	22.29	1
	1	2	22.26	22.30	22.36	1
	1	5	22.41	22.34	22.33	1
	3	0	21.98	22.13	22.16	1
	3	2	21.92	22.09	22.06	1
	3	3	21.93	22.03	22.13	1
	6	0	20.94	21.14	21.15	2

FCC ID: BCG-A2095		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 29 of 72

8.2.6

LTE Band 25 (PCS)

Table 8-22
LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.06	23.13	22.85	0
	1	50	23.03	23.02	22.72	0
	1	99	23.11	23.04	22.78	0
	50	0	22.17	22.14	22.08	1
	50	25	22.21	22.10	22.02	1
	50	50	22.28	22.09	22.11	1
	100	0	22.27	22.18	22.26	1
	15	0	23.20	23.11	22.97	0
	15	42	23.19	23.20	23.06	0
	15	85	23.01	23.12	22.94	0
	27	0	22.27	22.17	22.00	1
	27	37	22.26	22.21	22.18	1
27	73	22.10	22.14	22.10	1	
16QAM	1	0	22.44	22.34	22.25	1
	1	50	22.50	22.36	22.24	1
	1	99	22.50	22.40	22.05	1
	15	0	22.01	21.88	21.78	1
	15	42	21.93	21.96	21.83	1
	15	85	21.81	21.89	21.80	1
	27	0	21.06	20.98	20.79	2
	27	37	21.08	20.98	20.90	2
27	73	20.93	20.95	20.90	2	

Table 8-23
LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.91	22.89	22.89	0
	1	36	22.99	23.05	23.02	0
	1	74	22.76	23.09	22.74	0
	36	0	22.23	22.18	22.13	1
	36	18	22.25	22.20	22.17	1
	36	37	22.17	22.08	22.08	1
	75	0	22.31	22.16	22.36	1
	15	0	23.17	23.08	23.03	0
	15	30	23.23	23.11	23.12	0
	15	60	23.05	23.04	22.97	0
	27	0	22.28	22.19	22.10	1
	27	24	22.33	22.19	22.19	1
27	48	22.19	22.14	22.04	1	
16QAM	1	0	22.41	22.32	22.31	1
	1	36	22.50	22.33	22.41	1
	1	74	22.42	22.38	22.20	1
	15	0	21.98	21.88	21.77	1
	15	30	22.01	21.91	21.84	1
	15	60	21.86	21.82	21.72	1
	27	0	21.01	20.97	20.87	2
	27	24	21.09	20.99	20.92	2
	27	48	20.96	20.90	20.84	2

FCC ID: BCG-A2095		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch			Page 30 of 72

Table 8-24
LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.18	23.01	22.98	0
	1	25	23.22	23.08	22.94	0
	1	49	23.22	23.17	22.86	0
	25	0	22.32	22.31	22.15	1
	25	12	22.32	22.34	22.10	1
	25	25	22.32	22.30	22.12	1
	50	0	22.27	22.22	22.13	1
	15	0	22.34	22.39	22.20	1
	15	17	22.36	22.38	22.17	1
	15	35	22.39	22.29	22.19	1
	27	0	22.32	22.29	22.13	1
	27	12	22.28	22.27	22.06	1
27	23	22.31	22.31	22.10	1	
16QAM	1	0	22.39	22.42	22.35	1
	1	25	22.35	22.46	22.36	1
	1	49	22.50	22.49	22.32	1
	25	0	21.10	20.97	20.91	2
	25	12	21.06	21.00	20.84	2
	25	25	21.08	20.97	20.86	2
	15	0	21.14	21.10	20.93	2
	15	17	21.11	21.08	20.89	2
	15	35	21.13	21.02	20.97	2
	27	0	21.07	20.97	20.88	2
	27	12	21.07	20.95	20.82	2
	27	23	21.07	21.03	20.84	2

Table 8-25
LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.08	22.97	22.85	0
	1	12	23.05	22.95	22.73	0
	1	24	23.07	22.99	22.82	0
	12	0	22.37	22.29	22.13	1
	12	6	22.37	22.30	22.10	1
	12	13	22.37	22.25	22.16	1
	25	0	22.39	22.24	22.13	1
16QAM	1	0	22.50	22.45	22.23	1
	1	12	22.48	22.49	22.13	1
	1	24	22.44	22.44	22.02	1
	12	0	21.15	21.03	20.86	2
	12	6	21.13	21.05	20.83	2
	12	13	21.14	20.95	20.86	2
	25	0	21.14	20.95	20.84	2

FCC ID: BCG-A2095		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 31 of 72

Table 8-26
LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.19	23.02	22.94	0
	1	7	23.24	22.99	22.88	0
	1	14	23.17	23.00	22.99	0
	8	0	22.35	22.24	22.05	1
	8	4	22.32	22.17	22.12	1
	8	7	22.34	22.16	22.11	1
	15	0	22.33	22.19	22.13	1
16QAM	1	0	22.50	22.10	22.19	1
	1	7	22.43	22.22	22.27	1
	1	14	22.45	22.30	22.23	1
	8	0	21.07	20.97	20.87	2
	8	4	21.04	20.91	20.81	2
	8	7	21.07	20.95	20.85	2
	15	0	21.07	20.90	20.81	2

Table 8-27
LTE Band 25 (PCS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.21	22.96	23.04	0
	1	2	23.15	22.95	23.04	0
	1	5	23.18	22.91	23.02	0
	3	0	23.21	23.11	22.92	0
	3	2	23.19	23.06	22.85	0
	3	3	23.19	23.05	22.87	0
	6	0	22.35	22.19	22.04	1
16QAM	1	0	22.50	22.21	22.07	1
	1	2	22.43	22.29	21.83	1
	1	5	22.45	22.20	22.11	1
	3	0	21.96	21.96	21.93	1
	3	2	21.98	21.96	21.88	1
	3	3	22.07	21.92	21.79	1
	6	0	21.10	21.00	20.87	2

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 32 of 72

8.2.7

LTE Band 7

Table 8-28
LTE Band 7 Conducted Powers - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.86	22.49	22.58	0
	1	50	22.95	22.48	22.67	0
	1	99	22.88	22.46	22.90	0
	50	0	21.83	21.73	21.78	1
	50	25	21.73	21.77	21.77	1
	50	50	21.71	21.69	21.84	1
	100	0	21.80	21.76	21.83	1
	15	0	22.85	22.72	22.79	0
	15	42	22.76	22.69	22.77	0
	15	85	22.76	22.71	22.70	0
	27	0	21.92	21.79	21.88	1
	27	37	21.91	21.82	21.97	1
27	73	21.88	21.79	21.90	1	
16QAM	1	0	21.80	21.89	21.99	1
	1	50	21.89	21.69	22.00	1
	1	99	21.88	21.47	22.00	1
	15	0	21.29	21.25	21.42	1
	15	42	21.26	21.13	21.49	1
	15	85	21.26	21.20	21.36	1
	27	0	20.33	20.36	20.52	2
	27	37	20.32	20.40	20.66	2
27	73	20.42	20.33	20.50	2	

Table 8-29
LTE Band 7 Conducted Powers - 15 MHz Bandwidth

LTE Band 7 15 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.39	22.30	22.82	0
	1	36	22.41	22.21	22.83	0
	1	74	22.36	22.07	22.78	0
	36	0	21.76	21.63	21.90	1
	36	18	21.73	21.67	21.95	1
	36	37	21.71	21.71	21.86	1
	75	0	21.81	21.75	22.00	1
	15	0	22.64	22.47	22.73	0
	15	30	22.58	22.56	22.80	0
	15	60	22.49	22.47	22.67	0
	27	0	21.72	21.69	21.83	1
	27	24	21.71	21.77	21.97	1
27	48	21.72	21.69	21.85	1	
16QAM	1	0	21.70	21.64	21.91	1
	1	36	21.92	21.55	21.99	1
	1	74	21.70	21.26	21.98	1
	15	0	21.24	21.19	21.34	1
	15	30	21.21	21.27	21.50	1
	15	60	21.17	21.15	21.41	1
	27	0	20.36	20.27	20.60	2
	27	24	20.42	20.35	20.62	2
27	48	20.39	20.28	20.55	2	

FCC ID: BCG-A2095	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 33 of 72

Table 8-30
LTE Band 7 Conducted Powers - 10 MHz Bandwidth

LTE Band 7 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.66	22.39	22.86	0
	1	25	22.67	22.23	22.82	0
	1	49	22.65	22.21	22.86	0
	25	0	21.90	21.68	21.97	1
	25	12	21.82	21.65	21.93	1
	25	25	21.74	21.74	21.94	1
	50	0	21.74	21.73	21.92	1
	15	0	21.82	21.74	22.00	1
	15	17	21.79	21.73	21.98	1
	15	35	21.72	21.78	22.00	1
	27	0	21.83	21.75	21.97	1
	27	12	21.78	21.75	21.91	1
27	23	21.73	21.73	21.94	1	
16QAM	1	0	21.86	21.81	22.00	1
	1	25	21.90	21.66	21.92	1
	1	49	22.00	21.54	21.82	1
	25	0	20.50	20.27	20.59	2
	25	12	20.46	20.30	20.56	2
	25	25	20.40	20.30	20.57	2
	15	0	20.55	20.41	20.59	2
	15	17	20.50	20.41	20.54	2
	15	35	20.45	20.48	20.56	2
	27	0	20.48	20.39	20.60	2
	27	12	20.42	20.38	20.52	2
	27	23	20.38	20.37	20.55	2

Table 8-31
LTE Band 7 Conducted Powers - 5 MHz Bandwidth

LTE Band 7 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Design MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	22.63	22.38	22.68	0
	1	12	22.59	22.34	22.66	0
	1	24	22.60	22.31	22.65	0
	12	0	21.80	21.71	21.92	1
	12	6	21.82	21.67	21.92	1
	12	13	21.77	21.74	21.94	1
	25	0	21.86	21.81	21.95	1
16QAM	1	0	21.84	21.82	21.76	1
	1	12	21.85	21.64	21.75	1
	1	24	22.00	21.63	21.89	1
	12	0	20.46	20.33	20.56	2
	12	6	20.47	20.29	20.55	2
	12	13	20.46	20.43	20.58	2
	25	0	20.44	20.39	20.53	2

FCC ID: BCG-A2095	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 34 of 72

8.2.8

LTE Band 41

Table 8-32
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	Design MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)	
			Conducted Power [dBm]					
QPSK	1	0	22.41	22.27	22.16	22.40	22.32	0
	1	50	22.84	22.24	22.09	22.38	22.30	0
	1	99	23.00	22.22	22.02	22.42	22.28	0
	50	0	21.36	21.14	21.17	21.23	21.18	1
	50	25	21.37	21.18	21.19	21.28	21.16	1
	50	50	21.30	21.17	21.15	21.27	21.09	1
	100	0	21.36	21.22	21.23	21.31	21.21	1
	15	0	22.57	22.40	22.53	22.50	22.59	0
	15	42	22.67	22.46	22.62	22.62	22.63	0
	15	85	22.53	22.39	22.42	22.61	22.51	0
	27	0	21.54	21.28	21.37	21.44	21.50	1
	27	37	21.57	21.36	21.47	21.50	21.53	1
27	73	21.41	21.28	21.36	21.47	21.38	1	
16QAM	1	0	21.62	21.74	21.88	21.73	21.68	1
	1	50	21.84	21.69	21.90	21.83	21.70	1
	1	99	21.78	21.65	21.82	21.78	21.59	1
	15	0	21.47	21.47	21.58	21.60	21.55	1
	15	42	21.45	21.40	21.53	21.56	21.49	1
	15	85	21.51	21.43	21.55	21.63	21.54	1
	27	0	20.50	20.52	20.56	20.52	20.59	2
	27	37	20.45	20.46	20.51	20.62	20.53	2
	27	73	20.47	20.44	20.50	20.63	20.52	2

Table 8-33
LTE Band 41 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	Design MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)	
			Conducted Power [dBm]					
QPSK	1	0	22.51	22.31	22.32	22.42	22.49	0
	1	36	22.78	22.35	22.34	22.51	22.56	0
	1	74	22.75	22.25	22.23	22.46	22.46	0
	36	0	21.46	21.24	21.32	21.40	21.51	1
	36	18	21.52	21.31	21.39	21.50	21.54	1
	36	37	21.47	21.27	21.33	21.48	21.43	1
	75	0	21.54	21.27	21.37	21.47	21.53	1
	15	0	22.60	22.34	22.43	22.48	22.61	0
	15	30	22.68	22.44	22.54	22.64	22.69	0
	15	60	22.54	22.35	22.42	22.57	22.53	0
	27	0	21.54	21.26	21.36	21.41	21.54	1
	27	24	21.60	21.35	21.44	21.52	21.58	1
16QAM	27	48	21.46	21.26	21.35	21.47	21.45	1
	1	0	21.65	21.56	21.62	21.80	21.85	1
	1	36	21.81	21.47	21.60	21.92	21.79	1
	1	74	21.85	21.41	21.55	21.81	21.83	1
	15	0	21.40	21.43	21.45	21.60	21.54	1
	15	30	21.39	21.37	21.46	21.67	21.51	1
	15	60	21.37	21.38	21.43	21.71	21.56	1
	27	0	20.44	20.40	20.52	20.52	20.52	2
	27	24	20.46	20.37	20.47	20.63	20.50	2
27	48	20.44	20.38	20.45	20.62	20.47	2	

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 35 of 72

Table 8-34
LTE Band 41 Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	Design MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)	
			Conducted Power [dBm]					
QPSK	1	0	22.66	22.39	22.49	22.52	22.68	0
	1	25	22.72	22.37	22.44	22.47	22.68	0
	1	49	22.84	22.30	22.39	22.48	22.60	0
	25	0	21.55	21.26	21.35	21.45	21.55	1
	25	12	21.53	21.32	21.38	21.51	21.53	1
	25	25	21.50	21.33	21.38	21.51	21.45	1
	50	0	21.51	21.27	21.36	21.46	21.50	1
	15	0	21.59	21.30	21.42	21.52	21.59	1
	15	17	21.63	21.38	21.48	21.57	21.59	1
	15	35	21.55	21.36	21.43	21.57	21.53	1
	27	0	21.57	21.25	21.35	21.42	21.55	1
	27	12	21.54	21.30	21.38	21.47	21.53	1
16QAM	27	23	21.50	21.29	21.39	21.49	21.47	1
	1	0	21.81	21.92	21.94	21.90	21.80	1
	1	25	21.84	21.87	21.91	21.82	21.82	1
	1	49	21.87	21.84	21.96	21.91	21.88	1
	25	0	20.56	20.51	20.62	20.57	20.50	2
	25	12	20.54	20.47	20.61	20.66	20.48	2
	25	25	20.56	20.44	20.61	20.68	20.57	2
	15	0	20.54	20.59	20.67	20.65	20.67	2
	15	17	20.58	20.60	20.63	20.73	20.66	2
	15	35	20.56	20.58	20.63	20.75	20.64	2
	27	0	20.52	20.48	20.56	20.64	20.51	2
	27	12	20.53	20.47	20.55	20.71	20.53	2
27	23	20.54	20.44	20.55	20.73	20.52	2	

Table 8-35
LTE Band 41 Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	Design MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)	
			Conducted Power [dBm]					
QPSK	1	0	22.60	22.38	22.47	22.37	22.58	0
	1	12	22.69	22.35	22.47	22.39	22.62	0
	1	24	22.67	22.34	22.45	22.38	22.62	0
	12	0	21.50	21.38	21.49	21.57	21.61	1
	12	6	21.53	21.42	21.51	21.64	21.61	1
	12	13	21.52	21.42	21.51	21.64	21.53	1
	25	0	21.53	21.40	21.51	21.62	21.58	1
16QAM	1	0	21.83	21.87	21.94	21.87	21.81	1
	1	12	21.87	21.77	21.92	21.94	21.80	1
	1	24	21.88	21.81	21.99	22.00	21.88	1
	12	0	20.57	20.43	20.73	20.71	20.56	2
	12	6	20.50	20.42	20.66	20.73	20.57	2
	12	13	20.55	20.41	20.63	20.78	20.58	2
	25	0	20.53	20.40	20.61	20.76	20.61	2

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 36 of 72

8.3 WLAN Conducted Powers

Table 8-36
2.4 GHz WLAN Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	18.98	17.49	17.45
2417	2	N/A	18.49	18.50
2437	6	19.00	18.47	18.49
2457	10	N/A	18.49	18.50
2462	11	18.97	17.00	16.95

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

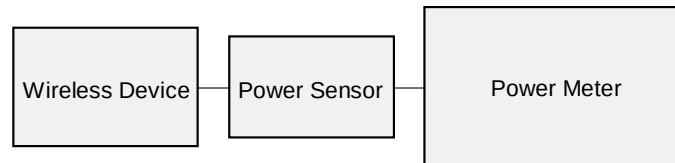


Figure 8-2
Power Measurement Setup

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 37 of 72

8.4 Bluetooth Conducted Powers

Table 8-37
Bluetooth Average RF Power

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	16.00	39.811
2441	GFSK	1.0	39	15.67	36.898
2480	GFSK	1.0	78	15.93	39.174

Note1: The bolded data rates and channel above were tested for SAR.

Note2: Bluetooth was evaluated with a test mode with 100% transmission duty factor.

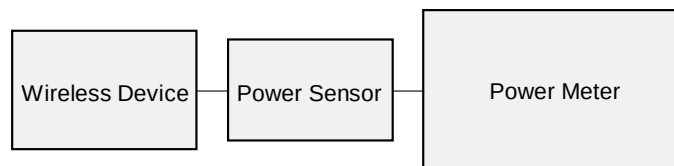


Figure 8-3
Power Measurement Setup

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 38 of 72

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
7/15/2019	750H	21.3	695	0.893	41.516	0.889	42.227	0.45%	-1.68%
			700	0.895	41.505	0.889	42.201	0.67%	-1.65%
			710	0.898	41.482	0.890	42.149	0.90%	-1.58%
			720	0.902	41.456	0.891	42.097	1.23%	-1.52%
			725	0.903	41.443	0.891	42.071	1.35%	-1.49%
			740	0.909	41.399	0.893	41.994	1.79%	-1.42%
			755	0.914	41.351	0.894	41.916	2.24%	-1.35%
			770	0.920	41.311	0.895	41.838	2.79%	-1.26%
			785	0.926	41.270	0.896	41.760	3.35%	-1.17%
7/8/2019	835H	21.4	800	0.932	41.228	0.897	41.682	3.90%	-1.09%
			820	0.894	42.659	0.899	41.578	-0.56%	2.60%
			835	0.899	42.603	0.900	41.500	-0.11%	2.66%
7/15/2019	835H	21.9	850	0.905	42.545	0.916	41.500	-1.20%	2.52%
			820	0.892	41.704	0.899	41.578	-0.78%	0.30%
			835	0.906	41.499	0.900	41.500	0.67%	0.00%
7/12/2019	1750H	21.4	850	0.921	41.309	0.916	41.500	0.55%	-0.46%
			1710	1.333	40.335	1.348	40.142	-1.11%	0.48%
			1750	1.357	40.292	1.371	40.079	-1.02%	0.53%
7/15/2019	1750H	21.7	1790	1.381	40.246	1.394	40.016	-0.93%	0.57%
			1710	1.328	38.591	1.348	40.142	-1.48%	-3.86%
			1750	1.369	38.395	1.371	40.079	-0.15%	-4.20%
7/9/2019	1900H	22.2	1790	1.408	38.196	1.394	40.016	1.00%	-4.55%
			1850	1.390	39.769	1.400	40.000	-0.71%	-0.58%
			1880	1.423	39.615	1.400	40.000	1.64%	-0.96%
7/12/2019	1900H	22.2	1910	1.456	39.481	1.400	40.000	4.00%	-1.30%
			1850	1.391	39.567	1.400	40.000	-0.64%	-1.08%
			1880	1.421	39.434	1.400	40.000	1.50%	-1.42%
7/10/2019	2450H	20.1	1910	1.453	39.288	1.400	40.000	3.79%	-1.78%
			2400	1.831	37.529	1.756	39.289	4.27%	-4.48%
			2450	1.869	37.439	1.800	39.200	3.83%	-4.49%
7/10/2019	2450H	21.4	2500	1.908	37.333	1.855	39.136	2.86%	-4.61%
			2400	1.800	38.881	1.756	39.289	2.51%	-1.04%
			2450	1.837	38.796	1.800	39.200	2.06%	-1.03%
			2500	1.877	38.696	1.855	39.136	1.19%	-1.12%
			2550	1.916	38.630	1.909	39.073	0.37%	-1.13%
			2600	1.958	38.532	1.964	39.009	-0.31%	-1.22%
			2650	1.999	38.452	2.018	38.945	-0.94%	-1.27%
			2700	2.039	38.346	2.073	38.882	-1.64%	-1.38%

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 39 of 72

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
6/27/2019	750B	21.8	695	0.962	53.788	0.959	55.745	0.31%	-3.51%
			700	0.963	53.776	0.959	55.726	0.42%	-3.50%
			710	0.967	53.756	0.960	55.687	0.73%	-3.47%
			720	0.970	53.736	0.961	55.648	0.94%	-3.44%
			725	0.972	53.725	0.961	55.629	1.14%	-3.42%
			740	0.978	53.688	0.963	55.570	1.56%	-3.39%
			755	0.983	53.657	0.964	55.512	1.97%	-3.34%
			770	0.989	53.627	0.965	55.453	2.49%	-3.29%
			785	0.993	53.606	0.966	55.395	2.80%	-3.23%
6/27/2019	835B	21.8	800	0.999	53.591	0.967	55.336	3.31%	-3.15%
			820	1.006	53.555	0.969	55.258	3.82%	-3.08%
			835	1.012	53.508	0.970	55.200	4.33%	-3.07%
7/8/2019	1750B	20.6	850	1.019	53.462	0.988	55.154	3.14%	-3.07%
			1710	1.404	51.913	1.463	53.537	-4.03%	-3.03%
			1750	1.432	51.872	1.488	53.432	-3.76%	-2.92%
7/8/2019	1900B	21.9	1790	1.460	51.810	1.514	53.326	-3.57%	-2.84%
			1850	1.552	53.233	1.520	53.300	2.11%	-0.13%
			1880	1.573	53.191	1.520	53.300	3.49%	-0.20%
6/24/2019	2450B	20.1	1910	1.594	53.173	1.520	53.300	4.87%	-0.24%
			2400	1.982	52.322	1.902	52.767	4.21%	-0.84%
			2450	2.028	52.260	1.950	52.700	4.00%	-0.83%
7/2/2019	2450B	21.6	2500	2.075	52.179	2.021	52.636	2.67%	-0.87%
			2400	1.991	50.564	1.902	52.767	4.68%	-4.17%
			2450	2.038	50.496	1.950	52.700	4.51%	-4.18%
7/11/2019	2450B	21.5	2500	2.081	50.413	2.021	52.636	2.97%	-4.22%
			2400	1.995	52.077	1.902	52.767	4.89%	-1.31%
			2450	2.042	52.001	1.950	52.700	4.72%	-1.33%
			2500	2.090	51.913	2.021	52.636	3.41%	-1.37%
			2550	2.137	51.850	2.092	52.573	2.15%	-1.38%
7/13/2019	2450B	21.1	2600	2.188	51.754	2.163	52.509	1.16%	-1.44%
			2400	1.959	51.632	1.902	52.767	3.00%	-2.15%
			2450	2.005	51.564	1.950	52.700	2.82%	-2.16%
			2500	2.054	51.477	2.021	52.636	1.63%	-2.20%
			2550	2.102	51.404	2.092	52.573	0.48%	-2.22%
			2600	2.150	51.310	2.163	52.509	-0.60%	-2.28%
			2650	2.199	51.223	2.234	52.445	-1.57%	-2.33%
			2700	2.246	51.119	2.305	52.382	-2.56%	-2.41%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 40 of 72

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
AM5	750	HEAD	07/15/2019	21.2	20.3	0.200	1097	3318	1.680	8.220	8.400	2.19%
AM3	850	HEAD	07/08/2019	21.3	21.7	0.200	1010	7420	2.060	9.930	10.300	3.73%
AM4	835	HEAD	07/15/2019	23.1	21.9	0.200	4d180	7532	1.870	9.600	9.350	-2.60%
AM7	1750	HEAD	07/12/2019	20.9	21.7	0.100	1092	3837	3.780	36.100	37.800	4.71%
AM7	1750	HEAD	07/15/2019	22.3	22.3	0.100	1092	3837	3.860	36.100	38.600	6.93%
AM5	1900	HEAD	07/09/2019	19.7	20.7	0.100	5d026	3318	4.110	40.200	41.100	2.24%
AM2	1900	HEAD	07/12/2019	22.3	20.8	0.100	5d026	7490	3.860	40.200	38.600	-3.98%
AM8	2450	HEAD	07/10/2019	20.7	20.1	0.100	921	7416	4.930	53.100	49.300	-7.16%
AM3	2450	HEAD	07/10/2019	22.9	22.3	0.100	750	7420	5.190	53.100	51.900	-2.26%
AM3	2600	HEAD	07/10/2019	22.9	22.3	0.100	1042	7420	6.100	57.700	61.000	5.72%

Table 9-3
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
AM3	750	BODY	06/27/2019	23.9	21.8	0.200	1097	7420	1.190	5.680	5.950	4.75%
AM3	850	BODY	06/27/2019	23.9	21.8	0.200	1010	7420	1.400	6.680	7.000	4.79%
AM7	1750	BODY	07/08/2019	21.9	20.7	0.100	1092	3837	1.990	19.400	19.900	2.58%
AM4	1900	BODY	07/08/2019	23.3	21.3	0.100	5d026	7532	2.130	21.200	21.300	0.47%
AM3	2450	BODY	06/24/2019	23.4	20.1	0.100	921	7420	2.540	23.800	25.400	6.72%
AM3	2450	BODY	07/02/2019	23.1	21.6	0.100	921	7420	2.510	23.800	25.100	5.46%
AM4	2450	BODY	07/11/2019	23.0	21.6	0.100	750	7532	2.500	24.100	25.000	3.73%
AM4	2450	BODY	07/13/2019	22.3	20.1	0.100	750	7532	2.450	24.100	24.500	1.66%
AM4	2600	BODY	07/13/2019	22.3	20.1	0.100	1042	7532	2.460	24.900	24.600	-1.20%

FCC ID: BCG-A2095	 SAR EVALUATION REPORT							Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch						Page 41 of 72

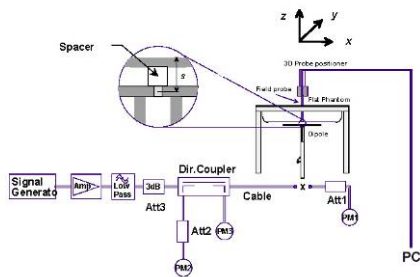


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 42 of 72

10 SAR DATA SUMMARY

10.1 Standalone Head SAR Data

Table 10-1
UMTS Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.10	10 mm	Aluminum	Sport	D92YT011MW8L	1:1	Front	0.001	1.130	0.001	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.16	10 mm	Aluminum	Metal Links	D92YT010MW8L	1:1	Front	0.000	1.130	0.000	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.13	10 mm	Aluminum	Metal Loop	D92YT00VMW8L	1:1	Front	0.001	1.130	0.001	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.13	10 mm	Stainless Steel	Sport	D92YT00XMW95	1:1	Front	0.000	1.130	0.000	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.19	10 mm	Stainless Steel	Metal Links	D92YT005MW95	1:1	Front	0.000	1.130	0.000	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.14	10 mm	Stainless Steel	Metal Loop	D92YT00NMW95	1:1	Front	0.001	1.130	0.001	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.11	10 mm	Titanium	Sport	D92YV01WMWC4	1:1	Front	0.001	1.130	0.001	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.12	10 mm	Titanium	Metal Links	D92YV01UMWC4	1:1	Front	0.001	1.130	0.001	A1
836.60	4183	UMTS 850	RMC	25.0	24.47	0.20	10 mm	Titanium	Metal Loop	D92YV01VMWC4	1:1	Front	0.001	1.130	0.001	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.12	10 mm	Ceramic	Sport	D92YV003MWCD	1:1	Front	0.001	1.130	0.001	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.18	10 mm	Ceramic	Metal Links	D92YV001MWCD	1:1	Front	0.000	1.130	0.000	
836.60	4183	UMTS 850	RMC	25.0	24.47	-0.19	10 mm	Ceramic	Metal Loop	D92YV001MWCD	1:1	Front	0.001	1.130	0.001	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.09	10 mm	Aluminum	Sport	D92YT011MW8L	1:1	Front	0.120	1.161	0.139	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.03	10 mm	Aluminum	Metal Links	D92YT011MW8L	1:1	Front	0.166	1.161	0.193	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.01	10 mm	Aluminum	Metal Loop	D92YT010MW8L	1:1	Front	0.176	1.161	0.204	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.03	10 mm	Stainless Steel	Sport	D92YT005MW95	1:1	Front	0.125	1.161	0.145	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.01	10 mm	Stainless Steel	Metal Links	D92YT005MW95	1:1	Front	0.157	1.161	0.182	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.01	10 mm	Stainless Steel	Metal Loop	D92YT005MW95	1:1	Front	0.162	1.161	0.188	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.08	10 mm	Titanium	Sport	D92YV01UMWC4	1:1	Front	0.124	1.161	0.144	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.07	10 mm	Titanium	Metal Links	D92YV01UMWC4	1:1	Front	0.169	1.161	0.196	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.04	10 mm	Titanium	Metal Loop	D92YV01UMWC4	1:1	Front	0.237	1.161	0.275	A2
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.07	10 mm	Ceramic	Sport	D92YV003MWCD	1:1	Front	0.156	1.161	0.181	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.14	10 mm	Ceramic	Metal Links	D92YV004MWCD	1:1	Front	0.173	1.161	0.201	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.08	10 mm	Ceramic	Metal Loop	D92YV003MWCD	1:1	Front	0.225	1.161	0.261	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.03	10 mm	Aluminum	Sport	D92YT00VMW8L	1:1	Front	0.219	1.189	0.260	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.02	10 mm	Aluminum	Metal Links	D92YT013MW8L	1:1	Front	0.263	1.189	0.313	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.01	10 mm	Aluminum	Metal Loop	D92YT00VMW8L	1:1	Front	0.307	1.189	0.365	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.04	10 mm	Stainless Steel	Sport	D92YT00XMW95	1:1	Front	0.207	1.189	0.246	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.03	10 mm	Stainless Steel	Metal Links	D92YT005MW95	1:1	Front	0.222	1.189	0.264	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.06	10 mm	Stainless Steel	Metal Loop	D92YT00NMW95	1:1	Front	0.271	1.189	0.322	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.02	10 mm	Titanium	Sport	D92YV01VMWC4	1:1	Front	0.257	1.189	0.306	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.01	10 mm	Titanium	Metal Links	D92YV01WMWC4	1:1	Front	0.220	1.189	0.262	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.07	10 mm	Titanium	Metal Loop	D92YV01UMWC4	1:1	Front	0.280	1.189	0.333	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.07	10 mm	Ceramic	Sport	D92YV001MWCD	1:1	Front	0.358	1.189	0.426	A3
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.01	10 mm	Ceramic	Metal Links	D92YV004MWCD	1:1	Front	0.225	1.189	0.268	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.05	10 mm	Ceramic	Metal Loop	D92YV003MWCD	1:1	Front	0.242	1.189	0.288	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 43 of 72

Table 10-2
LTE Band 12 Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	0.16	0	Aluminum	D92YT011MW8L	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	0.14	0	Aluminum	D92YT00VMW8L	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	0.14	0	Aluminum	D92YT00YMW8L	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	0.12	1	Aluminum	D92YT011MW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.140	0.000	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	-0.15	1	Aluminum	D92YT00VMW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.140	0.000	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	0.11	1	Aluminum	D92YT00YMW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.140	0.000	
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	-0.10	0	Stainless Steel	D92YT007MW95	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	-0.16	0	Stainless Steel	D92YT005MW95	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	0.19	0	Stainless Steel	D92YT00WMW95	QPSK	1	25	10 mm	Front	1:1	0.000	1.191	0.000	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	0.04	1	Stainless Steel	D92YT007MW95	QPSK	25	0	10 mm	Front	1:1	0.001	1.140	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	-0.18	1	Stainless Steel	D92YT005MW95	QPSK	25	0	10 mm	Front	1:1	0.001	1.140	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	-0.12	1	Stainless Steel	D92YT00WMW95	QPSK	25	0	10 mm	Front	1:1	0.000	1.140	0.000	
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	-0.14	0	Titanium	D92YV011VMWC4	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	-0.16	0	Titanium	D92YV011VMWC4	QPSK	1	25	10 mm	Front	1:1	0.003	1.191	0.004	A4
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	0.18	0	Titanium	D92YV011VMWC4	QPSK	1	25	10 mm	Front	1:1	0.000	1.191	0.000	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	-0.13	1	Titanium	D92YV011VMWC4	QPSK	25	0	10 mm	Front	1:1	0.001	1.140	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	-0.10	1	Titanium	D92YV011VMWC4	QPSK	25	0	10 mm	Front	1:1	0.002	1.140	0.002	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	0.12	1	Titanium	D92YV011VMWC4	QPSK	25	0	10 mm	Front	1:1	0.000	1.140	0.000	
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	-0.14	0	Ceramic	D92YV004MWCD	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	-0.12	0	Ceramic	D92YV001MWCD	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	0.16	0	Ceramic	D92YV003MWCD	QPSK	1	25	10 mm	Front	1:1	0.001	1.191	0.001	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	-0.17	1	Ceramic	D92YV004MWCD	QPSK	25	0	10 mm	Front	1:1	0.001	1.140	0.001	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	0.11	1	Ceramic	D92YV001MWCD	QPSK	25	0	10 mm	Front	1:1	0.000	1.140	0.000	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	0.17	1	Ceramic	D92YV003MWCD	QPSK	25	0	10 mm	Front	1:1	0.001	1.140	0.001	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 44 of 72

Table 10-3
LTE Band 13 Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	0.13	0	Aluminum	D92YT00VMW8L	QPSK	1	0	10 mm	Front	1:1	0.001	1.180	0.001	
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	0.13	0	Aluminum	D92YT011MW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.180	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	0.13	0	Aluminum	D92YT00YMW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.180	0.000	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	-0.04	1	Aluminum	D92YT00VMW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	0.19	1	Aluminum	D92YT011MW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	0.17	1	Aluminum	D92YT00YMW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	0.13	0	Stainless Steel	D92YT005MW95	QPSK	1	0	10 mm	Front	1:1	0.001	1.180	0.001	
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	0.18	0	Stainless Steel	D92YT00XMW95	QPSK	1	0	10 mm	Front	1:1	0.000	1.180	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	0.18	0	Stainless Steel	D92YT00WMW95	QPSK	1	0	10 mm	Front	1:1	0.001	1.180	0.001	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	0.18	1	Stainless Steel	D92YT005MW95	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	0.18	1	Stainless Steel	D92YT00XMW95	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	-0.14	1	Stainless Steel	D92YT00WMW95	QPSK	25	0	10 mm	Front	1:1	0.001	1.135	0.001	
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	0.13	0	Titanium	D92YV01VMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.180	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	0.14	0	Titanium	D92YV01WMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.180	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	0.19	0	Titanium	D92YV01UMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.180	0.000	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	-0.16	1	Titanium	D92YV01VMWC4	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	0.17	1	Titanium	D92YV01WMWC4	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	0.16	1	Titanium	D92YV01UMWC4	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	0.10	0	Ceramic	D92YV004MWCD	QPSK	1	0	10 mm	Front	1:1	0.002	1.180	0.002	A5
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	0.19	0	Ceramic	D92YV001MWCD	QPSK	1	0	10 mm	Front	1:1	0.001	1.180	0.001	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	0.19	0	Ceramic	D92YV003MWCD	QPSK	1	0	10 mm	Front	1:1	0.002	1.180	0.002	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	0.16	1	Ceramic	D92YV004MWCD	QPSK	25	0	10 mm	Front	1:1	0.002	1.135	0.002	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	0.12	1	Ceramic	D92YV001MWCD	QPSK	25	0	10 mm	Front	1:1	0.000	1.135	0.000	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	0.12	1	Ceramic	D92YV003MWCD	QPSK	25	0	10 mm	Front	1:1	0.001	1.135	0.001	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 45 of 72

Table 10-4
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	0.19	0	Aluminum	D92YT00YMW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	0.16	0	Aluminum	D92YT013MW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	-0.10	0	Aluminum	D92YT011MW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	0.10	1	Aluminum	D92YT00YMW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	0.18	1	Aluminum	D92YT013MW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	0.19	1	Aluminum	D92YT011MW8L	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	0.14	0	Stainless Steel	D92YT00NMW95	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	0.00	0	Stainless Steel	D92YT005MW95	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	0.13	0	Stainless Steel	D92YT00XMW95	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	0.17	1	Stainless Steel	D92YT00NMW95	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	0.19	1	Stainless Steel	D92YT005MW95	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	0.15	1	Stainless Steel	D92YT00XMW95	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	0.14	0	Titanium	D92YV01UMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	-0.17	0	Titanium	D92YV01WMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	-0.16	0	Titanium	D92YV01VMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	0.10	1	Titanium	D92YV01UMWC4	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	0.18	1	Titanium	D92YV01WMWC4	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	0.10	1	Titanium	D92YV01VMWC4	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	-0.11	0	Ceramic	D92YV003MWCD	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	0.14	0	Ceramic	D92YV001MWCD	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	0.15	0	Ceramic	D92YV004MWCD	QPSK	1	0	10 mm	Front	1:1	0.000	1.211	0.000	A6
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	0.15	1	Ceramic	D92YV003MWCD	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	-0.18	1	Ceramic	D92YV001MWCD	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	-0.17	1	Ceramic	D92YV004MWCD	QPSK	25	0	10 mm	Front	1:1	0.000	1.153	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch
Page 46 of 72		

Table 10-5
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	-0.16	0	Aluminum	D92YT00VMW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	0.13	0	Aluminum	D92YT011MW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	-0.17	0	Aluminum	D92YT013MW8L	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	0.19	1	Aluminum	D92YT00VMW8L	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	0.11	1	Aluminum	D92YT011MW8L	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	-0.15	1	Aluminum	D92YT013MW8L	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	0.14	0	Stainless Steel	D92YT00NMW95	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	0.19	0	Stainless Steel	D92YT005MW95	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	0.17	0	Stainless Steel	D92YT00XMW95	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	0.12	1	Stainless Steel	D92YT00NMW95	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	0.00	1	Stainless Steel	D92YT005MW95	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	0.15	1	Stainless Steel	D92YT00NMW95	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	-0.18	0	Titanium	D92YV01UMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	0.19	0	Titanium	D92YV01VMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	0.11	0	Titanium	D92YV01WMWC4	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	0.15	1	Titanium	D92YV01UMWC4	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	-0.15	1	Titanium	D92YV01VMWC4	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	0.14	1	Titanium	D92YV01WMWC4	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	0.11	0	Ceramic	D92YV001MWCD	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	-0.17	0	Ceramic	D92YV004MWCD	QPSK	1	0	10 mm	Front	1:1	0.001	1.208	0.001	A7
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	0.11	0	Ceramic	D92YV003MWCD	QPSK	1	0	10 mm	Front	1:1	0.000	1.208	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	-0.14	1	Ceramic	D92YV001MWCD	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	0.15	1	Ceramic	D92YV004MWCD	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	0.16	1	Ceramic	D92YV003MWCD	QPSK	25	25	10 mm	Front	1:1	0.000	1.156	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 47 of 72

Table 10-6
LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	0.04	0	Aluminum	D92YT010MW8L	QPSK	1	99	10 mm	Front	1:1	0.115	1.199	0.138	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	0.06	0	Aluminum	D92YT00YMW8L	QPSK	1	99	10 mm	Front	1:1	0.209	1.199	0.251	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	0.12	0	Aluminum	D92YT013MW8L	QPSK	1	99	10 mm	Front	1:1	0.207	1.199	0.248	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	0.02	1	Aluminum	D92YT010MW8L	QPSK	50	0	10 mm	Front	1:1	0.099	1.164	0.115	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.04	1	Aluminum	D92YT00YMW8L	QPSK	50	0	10 mm	Front	1:1	0.153	1.164	0.178	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	0.06	1	Aluminum	D92YT013MW8L	QPSK	50	0	10 mm	Front	1:1	0.170	1.164	0.198	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	-0.09	0	Stainless Steel	D92YT007MW95	QPSK	1	99	10 mm	Front	1:1	0.131	1.199	0.157	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	0.01	0	Stainless Steel	D92YT00XMW95	QPSK	1	99	10 mm	Front	1:1	0.171	1.199	0.205	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	-0.01	0	Stainless Steel	D92YT005MW95	QPSK	1	99	10 mm	Front	1:1	0.178	1.199	0.213	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	-0.10	1	Stainless Steel	D92YT007MW95	QPSK	50	0	10 mm	Front	1:1	0.105	1.164	0.122	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.08	1	Stainless Steel	D92YT00XMW95	QPSK	50	0	10 mm	Front	1:1	0.135	1.164	0.157	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	0.18	1	Stainless Steel	D92YT005MW95	QPSK	50	0	10 mm	Front	1:1	0.150	1.164	0.175	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	0.18	0	Titanium	D92YV01UMWC4	QPSK	1	99	10 mm	Front	1:1	0.121	1.199	0.145	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	-0.12	0	Titanium	D92YV01VMWC4	QPSK	1	99	10 mm	Front	1:1	0.157	1.199	0.188	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	-0.01	0	Titanium	D92YV01WMWC4	QPSK	1	99	10 mm	Front	1:1	0.214	1.199	0.257	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	0.05	1	Titanium	D92YV01UMWC4	QPSK	50	0	10 mm	Front	1:1	0.100	1.164	0.116	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.01	1	Titanium	D92YV01VMWC4	QPSK	50	0	10 mm	Front	1:1	0.125	1.164	0.146	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	-0.03	1	Titanium	D92YV01WMWC4	QPSK	50	0	10 mm	Front	1:1	0.171	1.164	0.199	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	0.17	0	Ceramic	D92YV003MWCD	QPSK	1	99	10 mm	Front	1:1	0.180	1.199	0.216	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	0.03	0	Ceramic	D92YV001MWCD	QPSK	1	99	10 mm	Front	1:1	0.162	1.199	0.194	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	0.17	0	Ceramic	D92YV004MWCD	QPSK	1	99	10 mm	Front	1:1	0.224	1.199	0.269	A8
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	0.10	1	Ceramic	D92YV003MWCD	QPSK	50	0	10 mm	Front	1:1	0.149	1.164	0.173	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.03	1	Ceramic	D92YV001MWCD	QPSK	50	0	10 mm	Front	1:1	0.131	1.164	0.152	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	-0.02	1	Ceramic	D92YV004MWCD	QPSK	50	0	10 mm	Front	1:1	0.184	1.164	0.214	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 48 of 72

Table 10-7
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	0.02	0	Aluminum	D92YT013MW8L	QPSK	1	0	10 mm	Front	1:1	0.234	1.222	0.286	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	0.01	0	Aluminum	D92YT00VMW8L	QPSK	1	0	10 mm	Front	1:1	0.235	1.222	0.287	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	-0.05	0	Aluminum	D92YT00YMW8L	QPSK	1	0	10 mm	Front	1:1	0.276	1.222	0.337	A9
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	0.00	1	Aluminum	D92YT013MW8L	QPSK	50	50	10 mm	Front	1:1	0.190	1.180	0.224	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	0.00	1	Aluminum	D92YT00VMW8L	QPSK	50	50	10 mm	Front	1:1	0.200	1.180	0.236	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	-0.19	1	Aluminum	D92YT00YMW8L	QPSK	50	50	10 mm	Front	1:1	0.220	1.180	0.260	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	-0.15	0	Stainless Steel	D92YT007MW95	QPSK	1	0	10 mm	Front	1:1	0.168	1.222	0.205	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	-0.02	0	Stainless Steel	D92YT00XMW95	QPSK	1	0	10 mm	Front	1:1	0.179	1.222	0.219	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	-0.02	0	Stainless Steel	D92YT005MW95	QPSK	1	0	10 mm	Front	1:1	0.204	1.222	0.249	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	-0.12	1	Stainless Steel	D92YT007MW95	QPSK	50	50	10 mm	Front	1:1	0.160	1.180	0.189	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	-0.14	1	Stainless Steel	D92YT00XMW95	QPSK	50	50	10 mm	Front	1:1	0.138	1.180	0.163	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	0.13	1	Stainless Steel	D92YT005MW95	QPSK	50	50	10 mm	Front	1:1	0.166	1.180	0.196	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	-0.05	0	Titanium	D92YV01UMWC4	QPSK	1	0	10 mm	Front	1:1	0.202	1.222	0.247	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	0.04	0	Titanium	D92YV01VMWC4	QPSK	1	0	10 mm	Front	1:1	0.222	1.222	0.271	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	0.00	0	Titanium	D92YV01WMWC4	QPSK	1	0	10 mm	Front	1:1	0.230	1.222	0.281	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	-0.04	1	Titanium	D92YV01UMWC4	QPSK	50	50	10 mm	Front	1:1	0.156	1.180	0.184	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	0.02	1	Titanium	D92YV01VMWC4	QPSK	50	50	10 mm	Front	1:1	0.179	1.180	0.211	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	0.04	1	Titanium	D92YV01WMWC4	QPSK	50	50	10 mm	Front	1:1	0.187	1.180	0.221	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	-0.03	0	Ceramic	D92YV001MWCD	QPSK	1	0	10 mm	Front	1:1	0.243	1.222	0.297	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	0.06	0	Ceramic	D92YV003MWCD	QPSK	1	0	10 mm	Front	1:1	0.204	1.222	0.249	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	-0.02	0	Ceramic	D92YV004MWCD	QPSK	1	0	10 mm	Front	1:1	0.213	1.222	0.260	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	-0.01	1	Ceramic	D92YV001MWCD	QPSK	50	50	10 mm	Front	1:1	0.190	1.180	0.224	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	-0.06	1	Ceramic	D92YV003MWCD	QPSK	50	50	10 mm	Front	1:1	0.155	1.180	0.183	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	0.02	1	Ceramic	D92YV004MWCD	QPSK	50	50	10 mm	Front	1:1	0.168	1.180	0.198	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 49 of 72

Table 10-8
LTE Band 7 Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	-0.12	0	Aluminum	D92YT010MW8L	QPSK	1	50	10 mm	Front	1:1	0.259	1.135	0.294	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	0.03	0	Aluminum	D92YT00YMW8L	QPSK	1	50	10 mm	Front	1:1	0.234	1.135	0.266	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	-0.06	0	Aluminum	D92YT011MW8L	QPSK	1	50	10 mm	Front	1:1	0.306	1.135	0.347	
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.01	1	Aluminum	D92YT010MW8L	QPSK	50	50	10 mm	Front	1:1	0.206	1.164	0.240	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	-0.04	1	Aluminum	D92YT00VMW8L	QPSK	50	50	10 mm	Front	1:1	0.217	1.164	0.253	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	-0.15	1	Aluminum	D92YT013MW8L	QPSK	50	50	10 mm	Front	1:1	0.225	1.164	0.262	
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	0.12	0	Stainless Steel	D92YT00WMW95	QPSK	1	50	10 mm	Front	1:1	0.516	1.135	0.586	A10
2535.00	21100	Mid	LTE Band 7	20	Sport	23.5	22.49	-0.19	0	Stainless Steel	D92YT00WMW95	QPSK	1	0	10 mm	Front	1:1	0.375	1.262	0.473	
2560.00	21350	High	LTE Band 7	20	Sport	23.5	22.90	-0.14	0	Stainless Steel	D92YT005MW95	QPSK	1	99	10 mm	Front	1:1	0.330	1.148	0.379	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	-0.02	0	Stainless Steel	D92YT005MW95	QPSK	1	50	10 mm	Front	1:1	0.338	1.135	0.384	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	-0.07	0	Stainless Steel	D92YT007MW95	QPSK	1	50	10 mm	Front	1:1	0.392	1.135	0.445	
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.12	1	Stainless Steel	D92YT00WMW95	QPSK	50	50	10 mm	Front	1:1	0.294	1.164	0.342	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	-0.06	1	Stainless Steel	D92YT005MW95	QPSK	50	50	10 mm	Front	1:1	0.225	1.164	0.262	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	-0.19	1	Stainless Steel	D92YT007MW95	QPSK	50	50	10 mm	Front	1:1	0.250	1.164	0.291	
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	-0.08	0	Titanium	D92YV01UMWC4	QPSK	1	50	10 mm	Front	1:1	0.452	1.135	0.513	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	-0.12	0	Titanium	D92YV01VMWC4	QPSK	1	50	10 mm	Front	1:1	0.273	1.135	0.310	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	-0.11	0	Titanium	D92YV01WMWC4	QPSK	1	50	10 mm	Front	1:1	0.386	1.135	0.438	
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.10	1	Titanium	D92YV01UMWC4	QPSK	50	50	10 mm	Front	1:1	0.252	1.164	0.293	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	0.14	1	Titanium	D92YV01VMWC4	QPSK	50	50	10 mm	Front	1:1	0.246	1.164	0.286	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	-0.03	1	Titanium	D92YV01WMWC4	QPSK	50	50	10 mm	Front	1:1	0.309	1.164	0.360	
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	-0.14	0	Ceramic	D92YV001MWCD	QPSK	1	50	10 mm	Front	1:1	0.337	1.135	0.382	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	-0.11	0	Ceramic	D92YV003MWCD	QPSK	1	50	10 mm	Front	1:1	0.341	1.135	0.387	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	-0.04	0	Ceramic	D92YV004MWCD	QPSK	1	50	10 mm	Front	1:1	0.301	1.135	0.342	
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.07	1	Ceramic	D92YV001MWCD	QPSK	50	50	10 mm	Front	1:1	0.282	1.164	0.328	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	-0.13	1	Ceramic	D92YV003MWCD	QPSK	50	50	10 mm	Front	1:1	0.255	1.164	0.297	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	-0.12	1	Ceramic	D92YV004MWCD	QPSK	50	50	10 mm	Front	1:1	0.241	1.164	0.281	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch
Page 50 of 72		

Table 10-9
LTE Band 41 Head SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	-0.01	0	Alumium	D92YT013MW8L	QPSK	1	99	10 mm	Front	1:1.58	0.251	1.122	0.282	
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	-0.01	0	Alumium	D92YT011MW8L	QPSK	1	99	10 mm	Front	1:1.58	0.131	1.122	0.147	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	0.02	0	Alumium	D92YT010MW8L	QPSK	1	99	10 mm	Front	1:1.58	0.200	1.122	0.224	
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	-0.02	1	Alumium	D92YT013MW8L	QPSK	50	25	10 mm	Front	1:1.58	0.194	1.297	0.252	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	0.07	1	Alumium	D92YT011MW8L	QPSK	50	25	10 mm	Front	1:1.58	0.103	1.297	0.134	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	0.04	1	Alumium	D92YT010MW8L	QPSK	50	25	10 mm	Front	1:1.58	0.139	1.297	0.180	
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	-0.04	0	Stainless Steel	D92YT007MW95	QPSK	1	99	10 mm	Front	1:1.58	0.311	1.122	0.349	A11
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	-0.05	0	Stainless Steel	D92YT003MW95	QPSK	1	99	10 mm	Front	1:1.58	0.170	1.122	0.191	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	0.07	0	Stainless Steel	D92YT005MW95	QPSK	1	99	10 mm	Front	1:1.58	0.213	1.122	0.239	
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	0.03	1	Stainless Steel	D92YT007MW95	QPSK	50	25	10 mm	Front	1:1.58	0.209	1.297	0.271	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	-0.05	1	Stainless Steel	D92YT003MW95	QPSK	50	25	10 mm	Front	1:1.58	0.130	1.297	0.169	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	0.04	1	Stainless Steel	D92YT005MW95	QPSK	50	25	10 mm	Front	1:1.58	0.181	1.297	0.235	
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	-0.02	0	Titanium	D92YV01VMWC4	QPSK	1	99	10 mm	Front	1:1.58	0.165	1.122	0.185	
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	0.05	0	Titanium	D92YV01UMWC4	QPSK	1	99	10 mm	Front	1:1.58	0.114	1.122	0.128	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	0.01	0	Titanium	D92YV01WMWC4	QPSK	1	99	10 mm	Front	1:1.58	0.146	1.122	0.164	
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	-0.02	1	Titanium	D92YV01VMWC4	QPSK	50	25	10 mm	Front	1:1.58	0.112	1.297	0.145	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	-0.04	1	Titanium	D92YV01UMWC4	QPSK	50	25	10 mm	Front	1:1.58	0.083	1.297	0.108	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	0.06	1	Titanium	D92YV01WMWC4	QPSK	50	25	10 mm	Front	1:1.58	0.107	1.297	0.139	
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	-0.03	0	Ceramic	D92YV003MWCD	QPSK	1	99	10 mm	Front	1:1.58	0.251	1.122	0.282	
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	-0.02	0	Ceramic	D92YV004MWCD	QPSK	1	99	10 mm	Front	1:1.58	0.181	1.122	0.203	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	0.02	0	Ceramic	D92YV001MWCD	QPSK	1	99	10 mm	Front	1:1.58	0.157	1.122	0.176	
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	0.09	1	Ceramic	D92YV003MWCD	QPSK	50	25	10 mm	Front	1:1.58	0.177	1.297	0.230	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	-0.02	1	Ceramic	D92YV004MWCD	QPSK	50	25	10 mm	Front	1:1.58	0.127	1.297	0.165	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	0.01	1	Ceramic	D92YV001MWCD	QPSK	50	25	10 mm	Front	1:1.58	0.115	1.297	0.149	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-10
2.4 GHz WLAN Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	19.0	19.00	-0.13	10mm	Aluminum	Sport	D92YT011MW8L	1	Front	100.0	0.171	1.000	1.000	0.171	
2437	6	802.11b	DSSS	22	19.0	19.00	0.12	10mm	Aluminum	Metal Links	D92YT011MW8L	1	Front	100.0	0.138	1.000	1.000	0.138	
2437	6	802.11b	DSSS	22	19.0	19.00	-0.02	10mm	Aluminum	Metal Loop	D92YT003MW8L	1	Front	100.0	0.128	1.000	1.000	0.128	
2437	6	802.11b	DSSS	22	19.0	19.00	0.17	10mm	Stainless Steel	Sport	D92YT003MW95	1	Front	100.0	0.202	1.000	1.000	0.202	
2437	6	802.11b	DSSS	22	19.0	19.00	-0.18	10mm	Stainless Steel	Metal Links	D92YT003MW95	1	Front	100.0	0.150	1.000	1.000	0.150	
2437	6	802.11b	DSSS	22	19.0	19.00	-0.16	10mm	Stainless Steel	Metal Loop	D92YT003MW95	1	Front	100.0	0.186	1.000	1.000	0.186	
2437	6	802.11b	DSSS	22	19.0	19.00	0.15	10mm	Titanium	Sport	D92YV01UMW/C4	1	Front	100.0	0.214	1.000	1.000	0.214	A12
2437	6	802.11b	DSSS	22	19.0	19.00	-0.14	10mm	Titanium	Metal Links	D92YV01UMW/C4	1	Front	100.0	0.184	1.000	1.000	0.184	
2437	6	802.11b	DSSS	22	19.0	19.00	-0.03	10mm	Titanium	Metal Loop	D92YV01UMW/C4	1	Front	100.0	0.175	1.000	1.000	0.175	
2437	6	802.11b	DSSS	22	19.0	19.00	0.03	10mm	Ceramic	Sport	D92YV001MWCD	1	Front	100.0	0.209	1.000	1.000	0.209	
2437	6	802.11b	DSSS	22	19.0	19.00	0.16	10mm	Ceramic	Metal Links	D92YV001MWCD	1	Front	100.0	0.143	1.000	1.000	0.143	
2437	6	802.11b	DSSS	22	19.0	19.00	0.19	10mm	Ceramic	Metal Loop	D92YV004MWCD	1	Front	100.0	0.119	1.000	1.000	0.119	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 51 of 72

Table 10-11
Bluetooth Head SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.04	10 mm	Aluminum	Sport	D92YT013MW8L	1	Front	100	0.100	1.413	1.000	0.141	A13
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.01	10 mm	Aluminum	Metal Links	D92YT013MW8L	1	Front	100	0.065	1.413	1.000	0.092	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.05	10 mm	Aluminum	Metal Loop	D92YT013MW8L	1	Front	100	0.074	1.413	1.000	0.105	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.16	10 mm	Stainless Steel	Sport	D92YT00NMW95	1	Front	100	0.057	1.413	1.000	0.081	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.02	10 mm	Stainless Steel	Metal Links	D92YT00NMW95	1	Front	100	0.056	1.413	1.000	0.079	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.03	10 mm	Stainless Steel	Metal Loop	D92YT00NMW95	1	Front	100	0.054	1.413	1.000	0.076	
2402.00	0	Bluetooth	FHSS	17.5	16.00	-0.11	10 mm	Titanium	Sport	D92YV01UMWC4	1	Front	100	0.079	1.413	1.000	0.112	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.11	10 mm	Titanium	Metal Links	D92YV01UMWC4	1	Front	100	0.055	1.413	1.000	0.078	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.04	10 mm	Titanium	Metal Loop	D92YV01UMWC4	1	Front	100	0.058	1.413	1.000	0.082	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.10	10 mm	Ceramic	Sport	D92YV003MWC4	1	Front	100	0.085	1.413	1.000	0.120	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.12	10 mm	Ceramic	Metal Links	D92YV003MWC4	1	Front	100	0.060	1.413	1.000	0.085	
2402.00	0	Bluetooth	FHSS	17.5	16.00	0.05	10 mm	Ceramic	Metal Loop	D92YV003MWC4	1	Front	100	0.065	1.413	1.000	0.092	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 52 of 72

10.2 Standalone Extremity SAR Data

Table 10-12
UMTS Extremity SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Housing Type	Wristband Type	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.19	0 mm	Aluminum	Sport	D92YT00VMW8L	1:1	back	0.092	1.130	0.104	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.14	0 mm	Aluminum	Metal Links	D92YT00VMW8L	1:1	back	0.160	1.130	0.181	A14
836.60	4183	UMTS 850	RMC	25.0	24.47	0.06	0 mm	Aluminum	Metal Loop	D92YT00VMW8L	1:1	back	0.118	1.130	0.133	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.04	0 mm	Stainless Steel	Sport	D92YT00NMW95	1:1	back	0.090	1.130	0.102	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.07	0 mm	Stainless Steel	Metal Links	D92YT00XMW95	1:1	back	0.155	1.130	0.175	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.03	0 mm	Stainless Steel	Metal Loop	D92YT007MW95	1:1	back	0.126	1.130	0.142	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.07	0 mm	Titanium	Sport	D92YV01VMWC4	1:1	back	0.094	1.130	0.106	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.16	0 mm	Titanium	Metal Links	D92YV01VMWC4	1:1	back	0.153	1.130	0.173	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.08	0 mm	Titanium	Metal Loop	D92YV01VMWC4	1:1	back	0.135	1.130	0.153	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.10	0 mm	Ceramic	Sport	D92YV001MWCD	1:1	back	0.090	1.130	0.102	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.03	0 mm	Ceramic	Metal Links	D92YV004MWCD	1:1	back	0.122	1.130	0.138	
836.60	4183	UMTS 850	RMC	25.0	24.47	0.06	0 mm	Ceramic	Metal Loop	D92YV003MWCD	1:1	back	0.113	1.130	0.128	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.19	0 mm	Aluminum	Sport	D92YT013MW8L	1:1	back	0.037	1.161	0.043	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.12	0 mm	Aluminum	Metal Links	1D92YT010MW8L	1:1	back	0.027	1.161	0.031	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.13	0 mm	Aluminum	Metal Loop	1D92YT010MW8L	1:1	back	0.014	1.161	0.016	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.03	0 mm	Stainless Steel	Sport	D92YT005MW95	1:1	back	0.044	1.161	0.051	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.12	0 mm	Stainless Steel	Metal Links	D92YT007MW95	1:1	back	0.036	1.161	0.042	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.13	0 mm	Stainless Steel	Metal Loop	D92YT007MW95	1:1	back	0.017	1.161	0.020	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.20	0 mm	Titanium	Sport	D92YV01UMWC4	1:1	back	0.063	1.161	0.073	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.04	0 mm	Titanium	Metal Links	D92YV01UMWC4	1:1	back	0.048	1.161	0.056	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.13	0 mm	Titanium	Metal Loop	D92YV01UMWC4	1:1	back	0.037	1.161	0.043	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.07	0 mm	Ceramic	Sport	D92YV001MWCD	1:1	back	0.045	1.161	0.052	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	-0.03	0 mm	Ceramic	Metal Links	D92YV004MWCD	1:1	back	0.061	1.161	0.071	
1732.40	1412	UMTS 1750	RMC	24.0	23.35	0.12	0 mm	Ceramic	Metal Loop	D92YV001MWCD	1:1	back	0.103	1.161	0.120	A15
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.05	0 mm	Aluminum	Sport	D92YT010MW8L	1:1	back	0.053	1.189	0.063	A16
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.09	0 mm	Aluminum	Metal Links	D92YT013MW8L	1:1	back	0.049	1.189	0.058	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.04	0 mm	Aluminum	Metal Loop	D92YT00YMW8L	1:1	back	0.018	1.189	0.021	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.08	0 mm	Stainless Steel	Sport	D92YT005MW95	1:1	back	0.032	1.189	0.038	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.08	0 mm	Stainless Steel	Metal Links	D92YT00NMW95	1:1	back	0.037	1.189	0.044	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.12	0 mm	Stainless Steel	Metal Loop	D92YT00XMW95	1:1	back	0.006	1.189	0.007	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.13	0 mm	Titanium	Sport	D92YV01VMWC4	1:1	back	0.045	1.189	0.054	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.12	0 mm	Titanium	Metal Links	D92YV01VMWC4	1:1	back	0.048	1.189	0.057	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.04	0 mm	Titanium	Metal Loop	D92YV01UMWC4	1:1	back	0.014	1.189	0.017	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.11	0 mm	Ceramic	Sport	D92YV003MWCD	1:1	back	0.029	1.189	0.034	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	0.12	0 mm	Ceramic	Metal Links	D92YV001MWCD	1:1	back	0.048	1.189	0.057	
1880.00	9400	UMTS 1900	RMC	24.0	23.25	-0.07	0 mm	Ceramic	Metal Loop	D92YV004MWCD	1:1	back	0.045	1.189	0.054	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak							Extremity 4.0 W/kg (mW/g) averaged over 10 grams									
Uncontrolled Exposure/General Population																

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 53 of 72

Table 10-13
LTE Band 12 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	-0.01	0	Aluminum	D92YT00YMW8L	QPSK	1	25	0 mm	back	1:1	0.116	1.191	0.138	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	-0.07	0	Aluminum	D92YT011MW8L	QPSK	1	25	0 mm	back	1:1	0.168	1.191	0.200	A17
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	-0.02	0	Aluminum	D92YT010MW8L	QPSK	1	25	0 mm	back	1:1	0.156	1.191	0.186	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	-0.04	1	Aluminum	D92YT00YMW8L	QPSK	25	0	0 mm	back	1:1	0.095	1.140	0.108	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	-0.03	1	Aluminum	D92YT011MW8L	QPSK	25	0	0 mm	back	1:1	0.136	1.140	0.155	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	0.00	1	Aluminum	D92YT010MW8L	QPSK	25	0	0 mm	back	1:1	0.122	1.140	0.139	
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	-0.13	0	Stainless Steel	D92YT00WMW95	QPSK	1	25	0 mm	back	1:1	0.124	1.191	0.148	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	-0.04	0	Stainless Steel	D92YT00NMW95	QPSK	1	25	0 mm	back	1:1	0.158	1.191	0.188	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	0.00	0	Stainless Steel	D92YT005MW95	QPSK	1	25	0 mm	back	1:1	0.130	1.191	0.155	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	-0.13	1	Stainless Steel	D92YT00WMW95	QPSK	25	0	0 mm	back	1:1	0.123	1.140	0.140	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	0.00	1	Stainless Steel	D92YT00NMW95	QPSK	25	0	0 mm	back	1:1	0.126	1.140	0.144	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	-0.15	1	Stainless Steel	D92YT005MW95	QPSK	25	0	0 mm	back	1:1	0.098	1.140	0.112	
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	0.00	0	Titanium	D92YV01VMWC4	QPSK	1	25	0 mm	back	1:1	0.114	1.191	0.136	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	0.03	0	Titanium	D92YV01VMWC4	QPSK	1	25	0 mm	back	1:1	0.158	1.191	0.188	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	-0.21	0	Titanium	D92YV01UMWC4	QPSK	1	25	0 mm	back	1:1	0.140	1.191	0.167	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	-0.03	1	Titanium	D92YV01VMWC4	QPSK	25	0	0 mm	back	1:1	0.096	1.140	0.109	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	0.11	1	Titanium	D92YV01VMWC4	QPSK	25	0	0 mm	back	1:1	0.126	1.140	0.144	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	-0.05	1	Titanium	D92YV01UMWC4	QPSK	25	0	0 mm	back	1:1	0.114	1.140	0.130	
707.50	23095	Mid	LTE Band 12	10	Sport	25.0	24.24	-0.01	0	Ceramic	D92YV003MWCD	QPSK	1	25	0 mm	back	1:1	0.121	1.191	0.144	
707.50	23095	Mid	LTE Band 12	10	Metal Links	25.0	24.24	-0.06	0	Ceramic	D92YV004MWCD	QPSK	1	25	0 mm	back	1:1	0.158	1.191	0.188	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	25.0	24.24	0.02	0	Ceramic	D92YV003MWCD	QPSK	1	25	0 mm	back	1:1	0.148	1.191	0.176	
707.50	23095	Mid	LTE Band 12	10	Sport	24.0	23.43	-0.02	1	Ceramic	D92YV003MWCD	QPSK	25	0	0 mm	back	1:1	0.099	1.140	0.113	
707.50	23095	Mid	LTE Band 12	10	Metal Links	24.0	23.43	-0.06	1	Ceramic	D92YV004MWCD	QPSK	25	0	0 mm	back	1:1	0.128	1.140	0.146	
707.50	23095	Mid	LTE Band 12	10	Metal Loop	24.0	23.43	0.07	1	Ceramic	D92YV003MWCD	QPSK	25	0	0 mm	back	1:1	0.123	1.140	0.140	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak									Extremity 4.0 W/kg (mW/g)												
Uncontrolled Exposure/General Population									averaged over 10 grams												

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 54 of 72

Table 10-14
LTE Band 13 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	-0.04	0	Aluminum	D92YT00YMW8L	QPSK	1	0	0 mm	back	1:1	0.154	1.180	0.182	
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	-0.07	0	Aluminum	D92YT010MW8L	QPSK	1	0	0 mm	back	1:1	0.229	1.180	0.270	A18
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	0.00	0	Aluminum	D92YT00VMW8L	QPSK	1	0	0 mm	back	1:1	0.174	1.180	0.205	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	0.10	1	Aluminum	D92YT00YMW8L	QPSK	25	0	0 mm	back	1:1	0.128	1.135	0.145	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	0.06	1	Aluminum	D92YT010MW8L	QPSK	25	0	0 mm	back	1:1	0.187	1.135	0.212	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	0.12	1	Aluminum	D92YT00VMW8L	QPSK	25	0	0 mm	back	1:1	0.145	1.135	0.165	
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	0.13	0	Stainless Steel	D92YT007MW95	QPSK	1	0	0 mm	back	1:1	0.143	1.180	0.169	
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	-0.06	0	Stainless Steel	D92YT00XMW95	QPSK	1	0	0 mm	back	1:1	0.201	1.180	0.237	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	-0.03	0	Stainless Steel	D92YT00NMW95	QPSK	1	0	0 mm	back	1:1	0.149	1.180	0.176	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	0.12	1	Stainless Steel	D92YT007MW95	QPSK	25	0	0 mm	back	1:1	0.128	1.135	0.145	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	-0.01	1	Stainless Steel	D92YT00XMW95	QPSK	25	0	0 mm	back	1:1	0.169	1.135	0.192	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	-0.07	1	Stainless Steel	D92YT00NMW95	QPSK	25	0	0 mm	back	1:1	0.123	1.135	0.140	
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	0.13	0	Titanium	D92YV01VMWC4	QPSK	1	0	0 mm	back	1:1	0.131	1.180	0.155	
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	0.17	0	Titanium	D92YV01UMWC4	QPSK	1	0	0 mm	back	1:1	0.149	1.180	0.176	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	-0.04	0	Titanium	D92YV01WMWC4	QPSK	1	0	0 mm	back	1:1	0.154	1.180	0.182	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	-0.20	1	Titanium	D92YV01VMWC4	QPSK	25	0	0 mm	back	1:1	0.113	1.135	0.128	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	0.10	1	Titanium	D92YV01UMWC4	QPSK	25	0	0 mm	back	1:1	0.129	1.135	0.146	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	0.10	1	Titanium	D92YV01WMWC4	QPSK	25	0	0 mm	back	1:1	0.130	1.135	0.148	
782.00	23230	Mid	LTE Band 13	10	Sport	25.0	24.28	0.05	0	Ceramic	D92YV003MWC4	QPSK	1	0	0 mm	back	1:1	0.133	1.180	0.157	
782.00	23230	Mid	LTE Band 13	10	Metal Links	25.0	24.28	0.08	0	Ceramic	D92YV004MWC4	QPSK	1	0	0 mm	back	1:1	0.175	1.180	0.207	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	25.0	24.28	-0.05	0	Ceramic	D92YV001MWC4	QPSK	1	0	0 mm	back	1:1	0.165	1.180	0.195	
782.00	23230	Mid	LTE Band 13	10	Sport	24.0	23.45	-0.10	1	Ceramic	D92YV003MWC4	QPSK	25	0	0 mm	back	1:1	0.111	1.135	0.126	
782.00	23230	Mid	LTE Band 13	10	Metal Links	24.0	23.45	0.04	1	Ceramic	D92YV004MWC4	QPSK	25	0	0 mm	back	1:1	0.153	1.135	0.174	
782.00	23230	Mid	LTE Band 13	10	Metal Loop	24.0	23.45	-0.03	1	Ceramic	D92YV001MWC4	QPSK	25	0	0 mm	back	1:1	0.140	1.135	0.159	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Extremity												
Spatial Peak									4.0 W/kg (mW/g)												
Uncontrolled Exposure/General Population									averaged over 10 grams												

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 55 of 72

Table 10-15
LTE Band 26 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	-0.14	0	Aluminum	D92YT013MW8L	QPSK	1	0	0 mm	back	1:1	0.089	1.211	0.108	A19
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	0.02	0	Aluminum	D92YT010MW8L	QPSK	1	0	0 mm	back	1:1	0.175	1.211	0.212	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	0.07	0	Aluminum	D92YT013MW8L	QPSK	1	0	0 mm	back	1:1	0.117	1.211	0.142	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	-0.04	1	Aluminum	D92YT013MW8L	QPSK	25	0	0 mm	back	1:1	0.083	1.153	0.096	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	0.21	1	Aluminum	D92YT010MW8L	QPSK	25	0	0 mm	back	1:1	0.147	1.153	0.169	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	0.06	1	Aluminum	D92YT011MW8L	QPSK	25	0	0 mm	back	1:1	0.107	1.153	0.123	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	-0.04	0	Stainless Steel	D92YT007MW95	QPSK	1	0	0 mm	back	1:1	0.098	1.211	0.119	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	0.07	0	Stainless Steel	D92YT000MW95	QPSK	1	0	0 mm	back	1:1	0.138	1.211	0.167	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	0.07	0	Stainless Steel	D92YT005MW95	QPSK	1	0	0 mm	back	1:1	0.130	1.211	0.157	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	-0.09	1	Stainless Steel	D92YT007MW95	QPSK	25	0	0 mm	back	1:1	0.085	1.153	0.098	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	0.18	1	Stainless Steel	D92YT000WMW95	QPSK	25	0	0 mm	back	1:1	0.124	1.153	0.143	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	0.14	1	Stainless Steel	D92YT005MW95	QPSK	25	0	0 mm	back	1:1	0.115	1.153	0.133	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	-0.13	0	Titanium	D92YV011VMW/C4	QPSK	1	0	0 mm	back	1:1	0.092	1.211	0.111	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	0.21	0	Titanium	D92YV011WMW/C4	QPSK	1	0	0 mm	back	1:1	0.144	1.211	0.174	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	0.08	0	Titanium	D92YV010UMW/C4	QPSK	1	0	0 mm	back	1:1	0.129	1.211	0.156	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	-0.12	1	Titanium	D92YV011VMW/C4	QPSK	25	0	0 mm	back	1:1	0.080	1.153	0.092	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	0.15	1	Titanium	D92YV011WMW/C4	QPSK	25	0	0 mm	back	1:1	0.132	1.153	0.152	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	0.11	1	Titanium	D92YV010UMW/C4	QPSK	25	0	0 mm	back	1:1	0.116	1.153	0.134	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	25.0	24.17	-0.01	0	Ceramic	D92YV003MW/CD	QPSK	1	0	0 mm	back	1:1	0.085	1.211	0.103	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	25.0	24.17	-0.12	0	Ceramic	D92YV004MW/CD	QPSK	1	0	0 mm	back	1:1	0.106	1.211	0.128	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	25.0	24.17	-0.05	0	Ceramic	D92YV001MW/CD	QPSK	1	0	0 mm	back	1:1	0.105	1.211	0.127	
844.00	26990	High	LTE Band 26 (Cell)	10	Sport	24.0	23.38	0.11	1	Ceramic	D92YV003MW/CD	QPSK	25	0	0 mm	back	1:1	0.075	1.153	0.086	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Links	24.0	23.38	-0.04	1	Ceramic	D92YV004MW/CD	QPSK	25	0	0 mm	back	1:1	0.096	1.153	0.111	
844.00	26990	High	LTE Band 26 (Cell)	10	Metal Loop	24.0	23.38	0.04	1	Ceramic	D92YV001MW/CD	QPSK	25	0	0 mm	back	1:1	0.092	1.153	0.106	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Extremity 4.0 W/kg (mW/g) averaged over 10 grams												

FCC ID: BCG-A2095	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch
Page 56 of 72		

Table 10-16
LTE Band 5 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	-0.10	0	Aluminum	D92YT011MW8L	QPSK	1	0	0 mm	back	1:1	0.099	1.208	0.120	A20
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	-0.16	0	Aluminum	D92YT011MW8L	QPSK	1	0	0 mm	back	1:1	0.160	1.208	0.193	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	-0.08	0	Aluminum	D92YT00YMW8L	QPSK	1	0	0 mm	back	1:1	0.112	1.208	0.135	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	0.02	1	Aluminum	D92YT011MW8L	QPSK	25	25	0 mm	back	1:1	0.086	1.156	0.099	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	0.05	1	Aluminum	D92YT011MW8L	QPSK	25	25	0 mm	back	1:1	0.143	1.156	0.165	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	0.01	1	Aluminum	D92YT00YMW8L	QPSK	25	25	0 mm	back	1:1	0.093	1.156	0.108	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	-0.13	0	Stainless Steel	D92YT00WMW95	QPSK	1	0	0 mm	back	1:1	0.075	1.208	0.091	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	0.20	0	Stainless Steel	D92YT005MW95	QPSK	1	0	0 mm	back	1:1	0.156	1.208	0.188	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	-0.01	0	Stainless Steel	D92YT00XMW95	QPSK	1	0	0 mm	back	1:1	0.113	1.208	0.137	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	0.07	1	Stainless Steel	D92YT00WMW95	QPSK	25	25	0 mm	back	1:1	0.063	1.156	0.073	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	0.13	1	Stainless Steel	D92YT005MW95	QPSK	25	25	0 mm	back	1:1	0.139	1.156	0.161	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	0.16	1	Stainless Steel	D92YT00XMW95	QPSK	25	25	0 mm	back	1:1	0.095	1.156	0.110	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	0.09	0	Titanium	D92YV01UMWC4	QPSK	1	0	0 mm	back	1:1	0.102	1.208	0.123	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	0.17	0	Titanium	D92YV01WMWC4	QPSK	1	0	0 mm	back	1:1	0.139	1.208	0.168	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	0.03	0	Titanium	D92YV01VMWC4	QPSK	1	0	0 mm	back	1:1	0.105	1.208	0.127	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	0.12	1	Titanium	D92YV01UMWC4	QPSK	25	25	0 mm	back	1:1	0.090	1.156	0.104	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	0.06	1	Titanium	D92YV01WMWC4	QPSK	25	25	0 mm	back	1:1	0.122	1.156	0.141	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	0.21	1	Titanium	D92YV01VMWC4	QPSK	25	25	0 mm	back	1:1	0.090	1.156	0.104	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	25.0	24.18	-0.05	0	Ceramic	D92YV001MWCD	QPSK	1	0	0 mm	back	1:1	0.089	1.208	0.108	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	25.0	24.18	-0.03	0	Ceramic	D92YV003MWCD	QPSK	1	0	0 mm	back	1:1	0.107	1.208	0.129	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	25.0	24.18	0.18	0	Ceramic	D92YV003MWCD	QPSK	1	0	0 mm	back	1:1	0.088	1.208	0.106	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Sport	24.0	23.37	0.00	1	Ceramic	D92YV001MWCD	QPSK	25	25	0 mm	back	1:1	0.079	1.156	0.091	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Links	24.0	23.37	0.13	1	Ceramic	D92YV003MWCD	QPSK	25	25	0 mm	back	1:1	0.094	1.156	0.109	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Metal Loop	24.0	23.37	0.12	1	Ceramic	D92YV003MWCD	QPSK	25	25	0 mm	back	1:1	0.075	1.156	0.087	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Extremity 4.0 W/kg (mW/g) averaged over 10 grams												

FCC ID: BCG-A2095	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch
Page 57 of 72		

Table 10-17
LTE Band 66 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	0.04	0	Aluminum	D92YT00VMW8L	QPSK	1	99	0 mm	back	1:1	0.036	1.199	0.043	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	-0.03	0	Aluminum	D92YT00VMW8L	QPSK	1	99	0 mm	back	1:1	0.053	1.199	0.064	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	0.17	0	Aluminum	D92YT011MW8L	QPSK	1	99	0 mm	back	1:1	0.012	1.199	0.014	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	0.05	1	Aluminum	D92YT00VMW8L	QPSK	50	0	0 mm	back	1:1	0.031	1.164	0.036	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.18	1	Aluminum	D92YT013MW8L	QPSK	50	0	0 mm	back	1:1	0.023	1.164	0.027	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	0.15	1	Aluminum	D92YT011MW8L	QPSK	50	0	0 mm	back	1:1	0.003	1.164	0.003	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	0.01	0	Stainless Steel	D92YT005MW95	QPSK	1	99	0 mm	back	1:1	0.034	1.199	0.041	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	0.08	0	Stainless Steel	D92YT00XMW95	QPSK	1	99	0 mm	back	1:1	0.025	1.199	0.030	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	0.02	0	Stainless Steel	D92YT00NMW95	QPSK	1	99	0 mm	back	1:1	0.022	1.199	0.026	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	0.04	1	Stainless Steel	D92YT005MW95	QPSK	50	0	0 mm	back	1:1	0.033	1.164	0.038	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.08	1	Stainless Steel	D92YT00XMW95	QPSK	50	0	0 mm	back	1:1	0.022	1.164	0.026	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	-0.12	1	Stainless Steel	D92YT005MW95	QPSK	50	0	0 mm	back	1:1	0.019	1.164	0.022	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	0.03	0	Titanium	D92YV01VMWC4	QPSK	1	99	0 mm	back	1:1	0.046	1.199	0.055	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	-0.21	0	Titanium	D92YV01VMWC4	QPSK	1	99	0 mm	back	1:1	0.039	1.199	0.047	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	0.14	0	Titanium	D92YV01UMWC4	QPSK	1	99	0 mm	back	1:1	0.032	1.199	0.038	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	0.12	1	Titanium	D92YV01VMWC4	QPSK	50	0	0 mm	back	1:1	0.043	1.164	0.050	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.13	1	Titanium	D92YV01VMWC4	QPSK	50	0	0 mm	back	1:1	0.034	1.164	0.040	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	0.13	1	Titanium	D92YV01UMWC4	QPSK	50	0	0 mm	back	1:1	0.027	1.164	0.031	
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	24.0	23.21	-0.07	0	Ceramic	D92YV001MWCD	QPSK	1	99	0 mm	back	1:1	0.039	1.199	0.047	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	24.0	23.21	0.14	0	Ceramic	D92YV004MWCD	QPSK	1	99	0 mm	back	1:1	0.058	1.199	0.070	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	24.0	23.21	-0.04	0	Ceramic	D92YV003MWCD	QPSK	1	99	0 mm	back	1:1	0.044	1.199	0.053	A21
1770.00	132572	High	LTE Band 66 (AWS)	20	Sport	23.0	22.34	0.13	1	Ceramic	D92YV001MWCD	QPSK	50	0	0 mm	back	1:1	0.035	1.164	0.041	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Links	23.0	22.34	0.12	1	Ceramic	D92YV004MWCD	QPSK	50	0	0 mm	back	1:1	0.048	1.164	0.056	
1770.00	132572	High	LTE Band 66 (AWS)	20	Metal Loop	23.0	22.34	0.11	1	Ceramic	D92YV003MWCD	QPSK	50	0	0 mm	back	1:1	0.039	1.164	0.045	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Extremity												
Spatial Peak									4.0 W/kg (mW/g)												
Uncontrolled Exposure/General Population									averaged over 10 grams												

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 58 of 72

Table 10-18
LTE Band 25 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	0.11	0	Aluminum	D92YT011MW8L	QPSK	1	0	0 mm	back	1:1	0.033	1.222	0.040	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	0.12	0	Aluminum	D92YT00YMW8L	QPSK	1	0	0 mm	back	1:1	0.016	1.222	0.020	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	-0.12	0	Aluminum	D92YT00VMW8L	QPSK	1	0	0 mm	back	1:1	0.006	1.222	0.007	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	-0.05	1	Aluminum	D92YT011MW8L	QPSK	50	50	0 mm	back	1:1	0.028	1.180	0.033	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	0.21	1	Aluminum	D92YT00YMW8L	QPSK	50	50	0 mm	back	1:1	0.011	1.180	0.013	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	-0.15	1	Aluminum	D92YT00VMW8L	QPSK	50	50	0 mm	back	1:1	0.005	1.180	0.006	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	-0.08	0	Stainless Steel	D92YT007MW95	QPSK	1	0	0 mm	back	1:1	0.028	1.222	0.034	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	0.13	0	Stainless Steel	D92YT00XMW95	QPSK	1	0	0 mm	back	1:1	0.033	1.222	0.040	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	0.13	0	Stainless Steel	D92YT007MW95	QPSK	1	0	0 mm	back	1:1	0.012	1.222	0.015	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	-0.19	1	Stainless Steel	D92YT007MW95	QPSK	50	50	0 mm	back	1:1	0.023	1.180	0.027	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	0.20	1	Stainless Steel	D92YT00XMW95	QPSK	50	50	0 mm	back	1:1	0.025	1.180	0.030	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	-0.12	1	Stainless Steel	D92YT007MW95	QPSK	50	50	0 mm	back	1:1	0.009	1.180	0.011	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	-0.09	0	Titanium	D92YV01VMWC4	QPSK	1	0	0 mm	back	1:1	0.034	1.222	0.042	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	-0.19	0	Titanium	D92YV01VMWC4	QPSK	1	0	0 mm	back	1:1	0.026	1.222	0.032	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	0.21	0	Titanium	D92YV01UMWC4	QPSK	1	0	0 mm	back	1:1	0.016	1.222	0.020	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	-0.11	1	Titanium	D92YV01VMWC4	QPSK	50	50	0 mm	back	1:1	0.031	1.180	0.037	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	-0.12	1	Titanium	D92YV01VMWC4	QPSK	50	50	0 mm	back	1:1	0.022	1.180	0.026	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	0.14	1	Titanium	D92YV01UMWC4	QPSK	50	50	0 mm	back	1:1	0.007	1.180	0.008	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Sport	24.0	23.13	0.01	0	Ceramic	D92YV004MWCD	QPSK	1	0	0 mm	back	1:1	0.093	1.222	0.114	A22
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Links	24.0	23.13	0.00	0	Ceramic	D92YV004MWCD	QPSK	1	0	0 mm	back	1:1	0.038	1.222	0.046	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	Metal Loop	24.0	23.13	0.13	0	Ceramic	D92YV001MWCD	QPSK	1	0	0 mm	back	1:1	0.020	1.222	0.024	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Sport	23.0	22.28	0.13	1	Ceramic	D92YV004MWCD	QPSK	50	50	0 mm	back	1:1	0.074	1.180	0.087	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Links	23.0	22.28	-0.20	1	Ceramic	D92YV004MWCD	QPSK	50	50	0 mm	back	1:1	0.018	1.180	0.021	
1860.00	26140	Low	LTE Band 25 (PCS)	20	Metal Loop	23.0	22.28	0.12	1	Ceramic	D92YV001MWCD	QPSK	50	50	0 mm	back	1:1	0.015	1.180	0.018	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak										Extremity 4.0 W/kg (mW/g) averaged over 10 grams											
Uncontrolled Exposure/General Population																					

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 59 of 72

Table 10-19
LTE Band 7 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	-0.12	0	Aluminum	D92YT013MW8L	QPSK	1	50	0 mm	back	1:1	0.133	1.135	0.151	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	0.05	0	Aluminum	D92YT010MW8L	QPSK	1	50	0 mm	back	1:1	0.097	1.135	0.110	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	0.00	0	Aluminum	D92YT011MW8L	QPSK	1	50	0 mm	back	1:1	0.107	1.135	0.121	
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.12	1	Aluminum	D92YT013MW8L	QPSK	50	50	0 mm	back	1:1	0.106	1.164	0.123	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	0.11	1	Aluminum	D92YT010MW8L	QPSK	50	50	0 mm	back	1:1	0.063	1.164	0.073	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	-0.18	1	Aluminum	D92YT011MW8L	QPSK	50	50	0 mm	back	1:1	0.062	1.164	0.072	
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	-0.02	0	Stainless Steel	D92YT00NMW95	QPSK	1	50	0 mm	back	1:1	0.198	1.135	0.225	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	0.11	0	Stainless Steel	D92YT005MW95	QPSK	1	50	0 mm	back	1:1	0.098	1.135	0.111	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	-0.10	0	Stainless Steel	D92YT00NMW95	QPSK	1	50	0 mm	back	1:1	0.207	1.135	0.235	A23
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.04	1	Stainless Steel	D92YT00NMW95	QPSK	50	50	0 mm	back	1:1	0.152	1.164	0.177	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	0.14	1	Stainless Steel	D92YT005MW95	QPSK	50	50	0 mm	back	1:1	0.071	1.164	0.083	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	0.10	1	Stainless Steel	D92YT00NMW95	QPSK	50	50	0 mm	back	1:1	0.150	1.164	0.175	
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	0.01	0	Titanium	D92YV01VMWC4	QPSK	1	50	0 mm	back	1:1	0.129	1.135	0.146	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	0.15	0	Titanium	D92YV01VMWC4	QPSK	1	50	0 mm	back	1:1	0.158	1.135	0.179	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	-0.12	0	Titanium	D92YV01UMWC4	QPSK	1	50	0 mm	back	1:1	0.062	1.135	0.070	
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.20	1	Titanium	D92YV01VMWC4	QPSK	50	50	0 mm	back	1:1	0.102	1.164	0.119	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	0.08	1	Titanium	D92YV01VMWC4	QPSK	50	50	0 mm	back	1:1	0.104	1.164	0.121	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	-0.06	1	Titanium	D92YV01UMWC4	QPSK	50	50	0 mm	back	1:1	0.048	1.164	0.056	
2510.00	20850	Low	LTE Band 7	20	Sport	23.5	22.95	-0.05	0	Ceramic	D92YV003MWCD	QPSK	1	50	0 mm	back	1:1	0.128	1.135	0.145	
2510.00	20850	Low	LTE Band 7	20	Metal Links	23.5	22.95	0.11	0	Ceramic	D92YV004MWCD	QPSK	1	50	0 mm	back	1:1	0.047	1.135	0.053	
2510.00	20850	Low	LTE Band 7	20	Metal Loop	23.5	22.95	-0.18	0	Ceramic	D92YV001MWCD	QPSK	1	50	0 mm	back	1:1	0.157	1.135	0.178	
2560.00	21350	High	LTE Band 7	20	Sport	22.5	21.84	-0.16	1	Ceramic	D92YV003MWCD	QPSK	50	50	0 mm	back	1:1	0.097	1.164	0.113	
2560.00	21350	High	LTE Band 7	20	Metal Links	22.5	21.84	-0.01	1	Ceramic	D92YV004MWCD	QPSK	50	50	0 mm	back	1:1	0.039	1.164	0.045	
2560.00	21350	High	LTE Band 7	20	Metal Loop	22.5	21.84	-0.12	1	Ceramic	D92YV001MWCD	QPSK	50	50	0 mm	back	1:1	0.091	1.164	0.106	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak									Extremity 4.0 W/kg (mW/g) averaged over 10 grams												
Uncontrolled Exposure/General Population																					

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 60 of 72

Table 10-20
LTE Band 41 Extremity SAR

MEASUREMENT RESULTS																					
FREQUENCY			Mode	Bandwidth [MHz]	Wristband Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Housing Type	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.																			(W/kg)	
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	0.15	0	Aluminum	D92YT00YMV8L	QPSK	1	99	0 mm	back	1:1.58	0.094	1.122	0.105	
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	0.13	0	Aluminum	D92YT010MW8L	QPSK	1	99	0 mm	back	1:1.58	0.061	1.122	0.068	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	0.00	0	Aluminum	D92YT011MW8L	QPSK	1	99	0 mm	back	1:1.58	0.068	1.122	0.076	
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	0.12	1	Aluminum	D92YT00YMV8L	QPSK	50	25	0 mm	back	1:1.58	0.066	1.297	0.086	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	0.13	1	Aluminum	D92YT010MW8L	QPSK	50	25	0 mm	back	1:1.58	0.043	1.297	0.056	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	-0.02	1	Aluminum	D92YT011MW8L	QPSK	50	25	0 mm	back	1:1.58	0.053	1.297	0.069	
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	0.01	0	Stainless Steel	D92YT00WMW95	QPSK	1	99	0 mm	back	1:1.58	0.077	1.122	0.086	
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	0.14	0	Stainless Steel	D92YT00XMW95	QPSK	1	99	0 mm	back	1:1.58	0.073	1.122	0.082	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	-0.13	0	Stainless Steel	D92YT005MW95	QPSK	1	99	0 mm	back	1:1.58	0.050	1.122	0.056	
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	-0.16	1	Stainless Steel	D92YT00WMW95	QPSK	50	25	0 mm	back	1:1.58	0.066	1.297	0.086	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	-0.13	1	Stainless Steel	D92YT00XMW95	QPSK	50	25	0 mm	back	1:1.58	0.053	1.297	0.069	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	0.13	1	Stainless Steel	D92YT005MW95	QPSK	50	25	0 mm	back	1:1.58	0.036	1.297	0.047	
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	0.01	0	Titanium	D92YV01VMWC4	QPSK	1	99	0 mm	back	1:1.58	0.074	1.122	0.083	
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	0.04	0	Titanium	D92YV01WMWC4	QPSK	1	99	0 mm	back	1:1.58	0.084	1.122	0.094	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	0.14	0	Titanium	D92YV01UMWC4	QPSK	1	99	0 mm	back	1:1.58	0.057	1.122	0.064	
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	-0.15	1	Titanium	D92YV01VMWC4	QPSK	50	25	0 mm	back	1:1.58	0.053	1.297	0.069	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	-0.12	1	Titanium	D92YV01WMWC4	QPSK	50	25	0 mm	back	1:1.58	0.061	1.297	0.079	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	-0.14	1	Titanium	D92YV01UMWC4	QPSK	50	25	0 mm	back	1:1.58	0.045	1.297	0.058	
2506.00	39750	Low	LTE Band 41	20	Sport	23.5	23.00	-0.06	0	Ceramic	D92YV003MWCD	QPSK	1	99	0 mm	back	1:1.58	0.088	1.122	0.099	
2506.00	39750	Low	LTE Band 41	20	Metal Links	23.5	23.00	0.13	0	Ceramic	D92YV004MWCD	QPSK	1	99	0 mm	back	1:1.58	0.030	1.122	0.034	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	23.5	23.00	-0.03	0	Ceramic	D92YV001MWCD	QPSK	1	99	0 mm	back	1:1.58	0.103	1.122	0.116	A24
2506.00	39750	Low	LTE Band 41	20	Sport	22.5	21.37	-0.04	1	Ceramic	D92YV003MWCD	QPSK	50	25	0 mm	back	1:1.58	0.062	1.297	0.080	
2506.00	39750	Low	LTE Band 41	20	Metal Links	22.5	21.37	0.12	1	Ceramic	D92YV004MWCD	QPSK	50	25	0 mm	back	1:1.58	0.023	1.297	0.030	
2506.00	39750	Low	LTE Band 41	20	Metal Loop	22.5	21.37	0.06	1	Ceramic	D92YV001MWCD	QPSK	50	25	0 mm	back	1:1.58	0.077	1.297	0.100	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Extremity											
Spatial Peak										4.0 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 10 grams											

Table 10-21
2.4 GHz WLAN Extremity SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	19.0	19.00	0.11	0 mm	Aluminum	Sport	D92YT010MW8L	1	back	100.0	0.047	1.000	1.000	0.047	
2437	6	802.11b	DSSS	22	19.0	19.00	0.12	0 mm	Aluminum	Metal Links	D92YT00VMW8L	1	back	100.0	0.061	1.000	1.000	0.061	
2437	6	802.11b	DSSS	22	19.0	19.00	0.01	0 mm	Aluminum	Metal Loop	D92YT00VMW8L	1	back	100.0	0.059	1.000	1.000	0.059	
2437	6	802.11b	DSSS	22	19.0	19.00	0.14	0 mm	Stainless Steel	Sport	D92YT00NMW95	1	back	100.0	0.076	1.000	1.000	0.076	
2437	6	802.11b	DSSS	22	19.0	19.00	0.14	0 mm	Stainless Steel	Metal Links	D92YT00NMW95	1	back	100.0	0.101	1.000	1.000	0.101	A25
2437	6	802.11b	DSSS	22	19.0	19.00	0.18	0 mm	Stainless Steel	Metal Loop	D92YT00NMW95	1	back	100.0	0.069	1.000	1.000	0.069	
2437	6	802.11b	DSSS	22	19.0	19.00	0.12	0 mm	Titanium	Sport	D92YV01VMW/C4	1	back	100.0	0.062	1.000	1.000	0.062	
2437	6	802.11b	DSSS	22	19.0	19.00	-0.12	0 mm	Titanium	Metal Links	D92YV01VMW/C4	1	back	100.0	0.056	1.000	1.000	0.056	
2437	6	802.11b	DSSS	22	19.0	19.00	0.16	0 mm	Titanium	Metal Loop	D92YV01VMW/C4	1	back	100.0	0.052	1.000	1.000	0.052	
2437	6	802.11b	DSSS	22	19.0	19.00	-0.15	0 mm	Ceramic	Sport	D92YV004MW/CD	1	back	100.0	0.023	1.000	1.000	0.023	
2437	6	802.11b	DSSS	22	19.0	19.00	0.17	0 mm	Ceramic	Metal Links	D92YV004MW/CD	1	back	100.0	0.023	1.000	1.000	0.023	
2437	6	802.11b	DSSS	22	19.0	19.00	0.11	0 mm	Ceramic	Metal Loop	D92YV004MW/CD	1	back	100.0	0.032	1.000	1.000	0.032	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Extremity 4.0 W/kg (mW/g) averaged over 10 grams											
Spatial Peak																			
Uncontrolled Exposure/General Population																			

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 61 of 72

Table 10-22
Bluetooth Extremity SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Housing Type	Wristband Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (10g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g) (W/kg)	Plot #
MHz	Ch.													(W/kg)				
2402	0	Bluetooth	FHSS	17.5	16.00	0.12	0 mm	Aluminum	Sport	D92YT010MW8L	1	back	100	0.015	1.413	1.000	0.021	
2402	0	Bluetooth	FHSS	17.5	16.00	0.13	0 mm	Aluminum	Metal Links	D92YT010MW8L	1	back	100	0.017	1.413	1.000	0.024	
2402	0	Bluetooth	FHSS	17.5	16.00	0.10	0 mm	Aluminum	Metal Loop	D92YT010MW8L	1	back	100	0.016	1.413	1.000	0.023	
2402	0	Bluetooth	FHSS	17.5	16.00	0.13	0 mm	Stainless Steel	Sport	D92YT005MW95	1	back	100	0.010	1.413	1.000	0.014	
2402	0	Bluetooth	FHSS	17.5	16.00	0.06	0 mm	Stainless Steel	Metal Links	D92YT005MW95	1	back	100	0.014	1.413	1.000	0.020	
2402	0	Bluetooth	FHSS	17.5	16.00	-0.01	0 mm	Stainless Steel	Metal Loop	D92YT005MW95	1	back	100	0.014	1.413	1.000	0.020	
2402	0	Bluetooth	FHSS	17.5	16.00	0.12	0 mm	Titanium	Sport	D92YV01VMWC4	1	back	100	0.019	1.413	1.000	0.027	
2402	0	Bluetooth	FHSS	17.5	16.00	0.11	0 mm	Titanium	Metal Links	D92YV01VMWC4	1	back	100	0.020	1.413	1.000	0.028	
2402	0	Bluetooth	FHSS	17.5	16.00	0.18	0 mm	Titanium	Metal Loop	D92YV01VMWC4	1	back	100	0.023	1.413	1.000	0.032	A26
2402	0	Bluetooth	FHSS	17.5	16.00	-0.19	0 mm	Ceramic	Sport	D92YV001MWCD	1	back	100	0.021	1.413	1.000	0.030	
2402	0	Bluetooth	FHSS	17.5	16.00	-0.15	0 mm	Ceramic	Metal Links	D92YV001MWCD	1	back	100	0.019	1.413	1.000	0.027	
2402	0	Bluetooth	FHSS	17.5	16.00	-0.05	0 mm	Ceramic	Metal Loop	D92YV001MWCD	1	back	100	0.020	1.413	1.000	0.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Extremity 4.0 W/kg (mW/g) averaged over 10 grams											

10.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg for 1g SAR and 2.0 W/Kg for 10g SAR.
7. This device has four housing types: Aluminum, Stainless Steel, Titanium, and Ceramic. The non-metallic wrist accessory, sport band, was evaluated for all exposure conditions. The available metallic wrist accessories, metal links band and metal loop band, were additionally evaluated.
8. This device is a portable wrist-worn device and does not support any other use conditions. Therefore, the procedures in FCC KDB Publication 447498 D01v06 Section 6.2 have been applied for extremity and next to mouth (head) conditions.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power

FCC ID: BCG-A2095		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 62 of 72

variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g and > 1.5 W/kg for 10g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. This device can only operate with 16 QAM on the uplink with less than or equal to 27 RB. QPSK and 16QAM LTE powers for RB size of 15 ("50% RB") and 27 ("100% RB") were additionally measured to support comparison and SAR test exclusion per KDB 941225 D05v02r04 Section 5.2.4 and 5.3.

WLAN/Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.2 for more information. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
2. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.
3. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8 MHz, VBW = 50 MHz, and detector = peak per guidance of Section 6.0 b) of ANSI C63. 10-2013 and KDB 558074 D01 v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100."
4. To determine compliance, Bluetooth SAR was measured with external power amplifier. Bluetooth was evaluated with a test mode with 100% transmission duty factor.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 63 of 72

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

11.3 Head SAR Simultaneous Transmission Analysis

For SAR summation, the highest reported SAR across all housing and wristband types was used as a conservative evaluation for the simultaneous transmission analysis.

Table 11-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Head at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	UMTS 850	0.001	0.214	0.215
	UMTS 1750	0.275	0.214	0.489
	UMTS 1900	0.426	0.214	0.640
	LTE Band 12	0.004	0.214	0.218
	LTE Band 13	0.002	0.214	0.216
	LTE Band 26 (Cell)	0.000	0.214	0.214
	LTE Band 5 (Cell)	0.001	0.214	0.215
	LTE Band 66 (AWS)	0.269	0.214	0.483
	LTE Band 25 (PCS)	0.337	0.214	0.551
	LTE Band 7	0.586	0.214	0.800
	LTE Band 41	0.349	0.214	0.563

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 64 of 72

Table 11-2
Simultaneous Transmission Scenario with Bluetooth (Head at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	UMTS 850	0.001	0.141	0.142
	UMTS 1750	0.275	0.141	0.416
	UMTS 1900	0.426	0.141	0.567
	LTE Band 12	0.004	0.141	0.145
	LTE Band 13	0.002	0.141	0.143
	LTE Band 26 (Cell)	0.000	0.141	0.141
	LTE Band 5 (Cell)	0.001	0.141	0.142
	LTE Band 66 (AWS)	0.269	0.141	0.410
	LTE Band 25 (PCS)	0.337	0.141	0.478
	LTE Band 7	0.586	0.141	0.727
	LTE Band 41	0.349	0.141	0.490

11.4 Extremity Simultaneous Transmission Analysis

Table 11-3
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Extremity at 0.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Extremity SAR	UMTS 850	0.181	0.101	0.282
	UMTS 1750	0.120	0.101	0.221
	UMTS 1900	0.063	0.101	0.164
	LTE Band 12	0.200	0.101	0.301
	LTE Band 13	0.270	0.101	0.371
	LTE Band 26 (Cell)	0.212	0.101	0.313
	LTE Band 5 (Cell)	0.193	0.101	0.294
	LTE Band 66 (AWS)	0.070	0.101	0.171
	LTE Band 25 (PCS)	0.114	0.101	0.215
	LTE Band 7	0.235	0.101	0.336
	LTE Band 41	0.116	0.101	0.217

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 65 of 72

Table 11-4
Simultaneous Transmission Scenario with Bluetooth (Extremity at 0.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Extremity SAR	UMTS 850	0.181	0.032	0.213
	UMTS 1750	0.120	0.032	0.152
	UMTS 1900	0.063	0.032	0.095
	LTE Band 12	0.200	0.032	0.232
	LTE Band 13	0.270	0.032	0.302
	LTE Band 26 (Cell)	0.212	0.032	0.244
	LTE Band 5 (Cell)	0.193	0.032	0.225
	LTE Band 66 (AWS)	0.070	0.032	0.102
	LTE Band 25 (PCS)	0.114	0.032	0.146
	LTE Band 7	0.235	0.032	0.267
	LTE Band 41	0.116	0.032	0.148

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch		Page 66 of 72

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was not assessed for each frequency band since all measured SAR values are < 0.80 W/kg for 1g SAR and < 2.0 W/kg for 10g SAR.

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis was not required.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 67 of 72

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E5515C	Wireless Communications Test Set	2/28/2018	Biennial	2/28/2020	GB41450275
Agilent	N5182A	MXG Vector Signal Generator	6/27/2019	Annual	6/27/2020	US46240505
Agilent	E4440A	PSA Series Spectrum Analyzer	11/14/2018	Annual	11/14/2019	MY46186272
Agilent	N5182A	MXG Vector Signal Generator	11/28/2018	Annual	11/28/2019	MY47420603
Agilent	E4438C	ESG Vector Signal Generator	3/8/2019	Biennial	3/8/2021	MY42082385
Agilent	8753ES	Network Analyzer	3/19/2019	Annual	3/19/2020	MY40001472
Agilent	E4438C	ESG Vector Signal Generator	6/27/2019	Annual	6/27/2020	MY45093852
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343971
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Anritsu	ML2495A	Power Meter	11/20/2018	Annual	11/20/2019	1039008
Anritsu	MA24106A	USB Power Sensor	5/6/2019	Annual	5/6/2020	1231538
Anritsu	MA24106A	USB Power Sensor	6/21/2019	Annual	6/21/2020	1244515
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	1207470
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339007
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/28/2018	Biennial	2/28/2020	170330160
Control Company	4352	Ultra Long Stem Thermometer	2/28/2018	Biennial	2/28/2020	170330158
Keysight Technologies	AT/N6705B	DC Power Supply	CBT	N/A	CBT	MY53001315
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini Circuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini Circuits	LP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mitutoyo	CD-6"CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	Bw-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	6/26/2019	Annual	6/26/2020	108843
Rohde & Schwarz	CMW500	Radio Communication Tester	4/15/2019	Annual	4/15/2020	167284
Rohde & Schwarz	CMW500	Radio Communication Tester	4/17/2019	Annual	4/17/2020	167285
SPEAG	D750V3	750 MHz SAR Dipole	9/8/2017	Biennial	9/8/2019	1097
SPEAG	D850V2	850 MHz SAR Dipole	9/8/2017	Biennial	9/8/2019	1010
SPEAG	D835V2	835 MHz SAR Dipole	5/18/2018	Biennial	5/18/2020	4d180
SPEAG	D1750V2	1750 MHz SAR Dipole	5/15/2018	Biennial	5/15/2020	1092
SPEAG	D1900V2	1900 MHz SAR Dipole	5/14/2018	Biennial	5/14/2020	5d026
SPEAG	D2450V2	2450 MHz SAR Dipole	11/12/2018	Annual	11/12/2019	921
SPEAG	D2450V2	2450 MHz SAR Dipole	6/14/2019	Biennial	6/14/2020	750
SPEAG	D2600V2	2600 MHz SAR Dipole	6/14/2019	Biennial	6/14/2020	1042
SPEAG	ES3DV3	SAR Probe	11/19/2018	Annual	11/19/2019	3318
SPEAG	EX3DV4	SAR Probe	9/18/2018	Annual	9/18/2019	7420
SPEAG	EX3DV4	E-field Probe	4/12/2019	Annual	4/12/2020	7532
SPEAG	EX3DV4	SAR Probe	1/28/2019	Annual	1/28/2020	3837
SPEAG	EX3DV4	SAR Probe	1/24/2019	Annual	1/24/2020	7490
SPEAG	EX3DV4	SAR Probe	6/19/2019	Annual	6/20/2020	7416
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/14/2018	Annual	8/14/2019	1408
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/12/2018	Annual	11/12/2019	1449
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/17/2019	Annual	4/17/2020	501
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/15/2019	Annual	1/15/2020	793
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/15/2019	Annual	1/15/2020	1532
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2019	Annual	6/14/2020	701
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/7/2019	Annual	5/7/2020	1070

Note: Each Equipment item was used solely within its respective calibration period.

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 68 of 72

14 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 69 of 72

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 70 of 72

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 71 of 72

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCG-A2095	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1905130010-01-R2.BCG	Test Dates: 06/24/19 - 07/15/19	DUT Type: Watch	Page 72 of 72

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV01UMWC4

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 MHz Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 41.479$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2019; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7532; ConvF(10.45, 10.45, 10.45) @ 836.6 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Head SAR, Front side, Mid.ch
Titanium, Metal Links Wrist Band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.8070 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.00216 W/kg

SAR(1 g) = 0.00113 W/kg

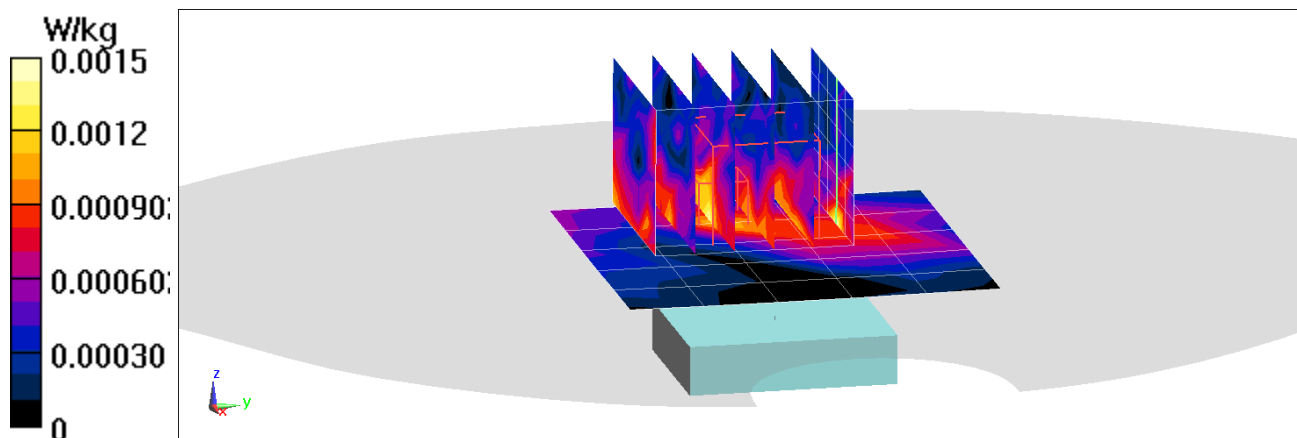

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV01UMWC4

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 MHz Head Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-12-2019; Ambient Temp: 20.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3837; ConvF(8.03, 8.03, 8.03) @ 1732.4 MHz; Calibrated: 1/28/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/15/2019

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Head SAR, Front side, Mid.ch
Titanium, Metal Loop Wrist Band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.26 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.237 W/kg

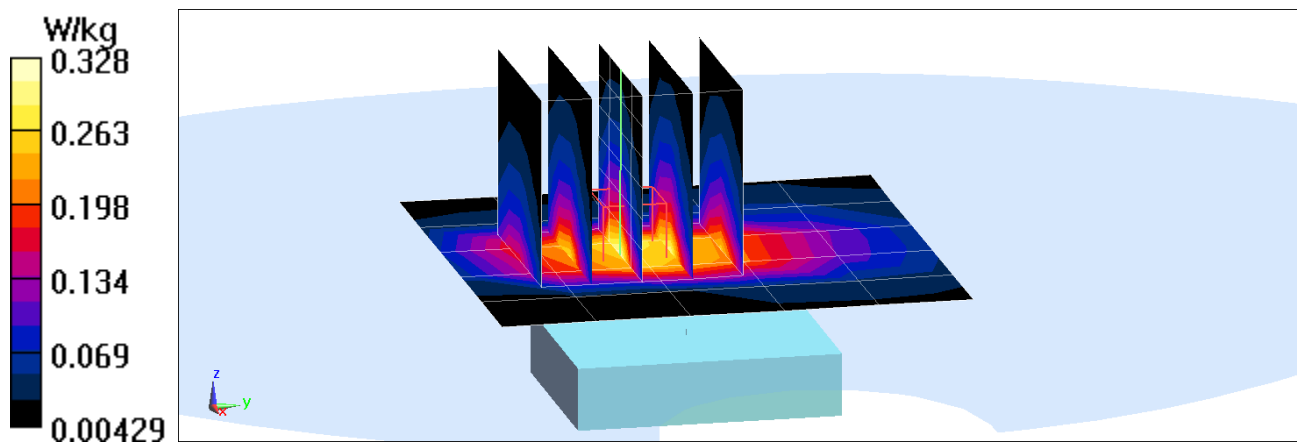

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV001MWCD

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.423 \text{ S/m}$; $\epsilon_r = 39.615$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-09-2019; Ambient Temp: 19.7°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3318; ConvF(5.19, 5.19, 5.19) @ 1880 MHz; Calibrated: 11/19/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 8/14/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Head SAR, Front side, Mid.ch
Ceramic, Sport Wrist Band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.95 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.358 W/kg

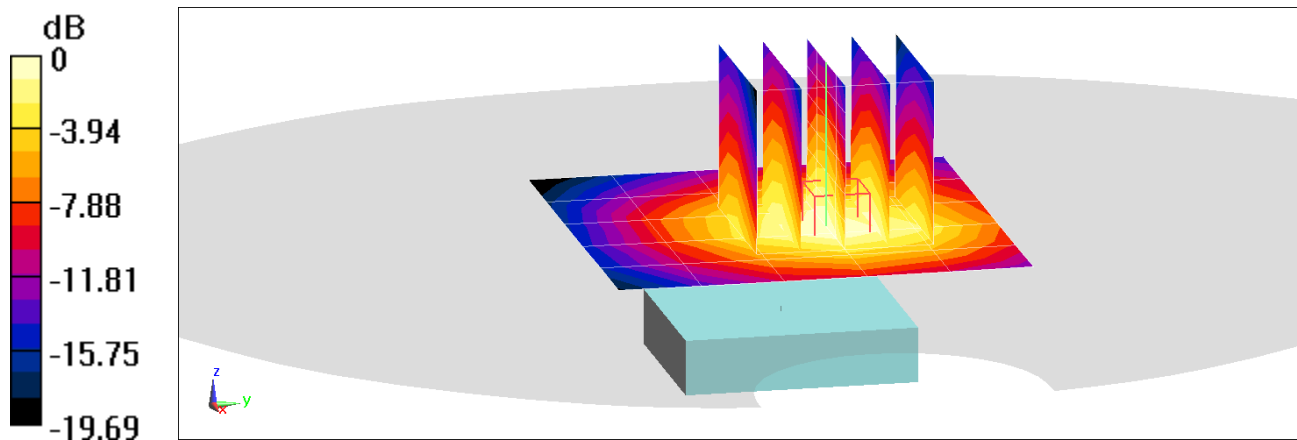

0 dB = 0.428 W/kg = -3.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV01UMWC4

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 MHz Head Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 41.488$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2019; Ambient Temp: 21.2°C; Tissue Temp: 20.3°C

Probe: ES3DV3 - SN3318; ConvF(6.6, 6.6, 6.6) @ 707.5 MHz; Calibrated: 11/19/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 8/14/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Head SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset,
Titanium, Metal Links Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.783 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.00387 W/kg

SAR(1 g) = 0.0026 W/kg

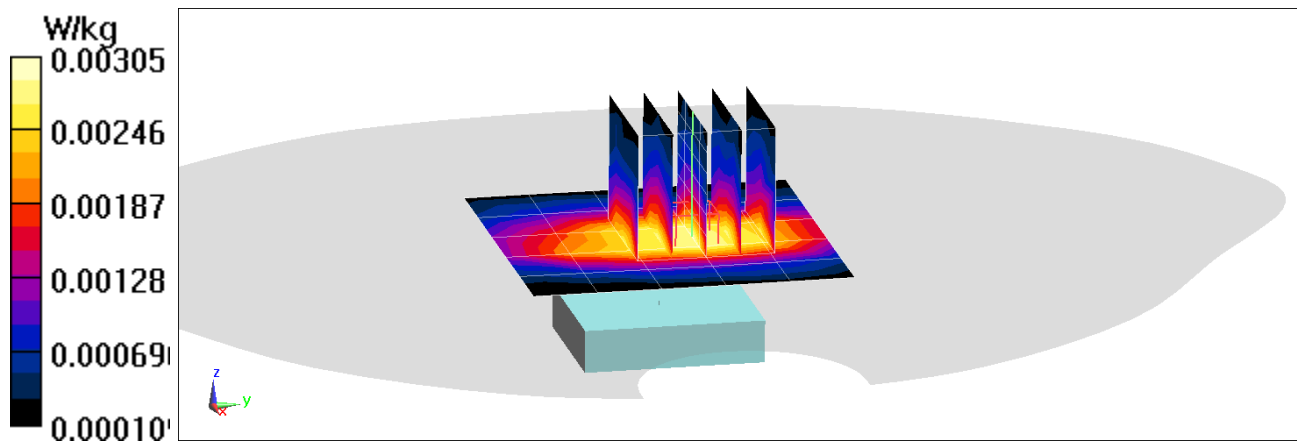

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV004MWCD

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 MHz Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 41.278$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2019; Ambient Temp: 21.2°C; Tissue Temp: 20.3°C

Probe: ES3DV3 - SN3318; ConvF(6.6, 6.6, 6.6) @ 782 MHz; Calibrated: 11/19/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 8/14/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Head SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Ceramic, Sport Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.474 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.00364 W/kg

SAR(1 g) = 0.00201 W/kg

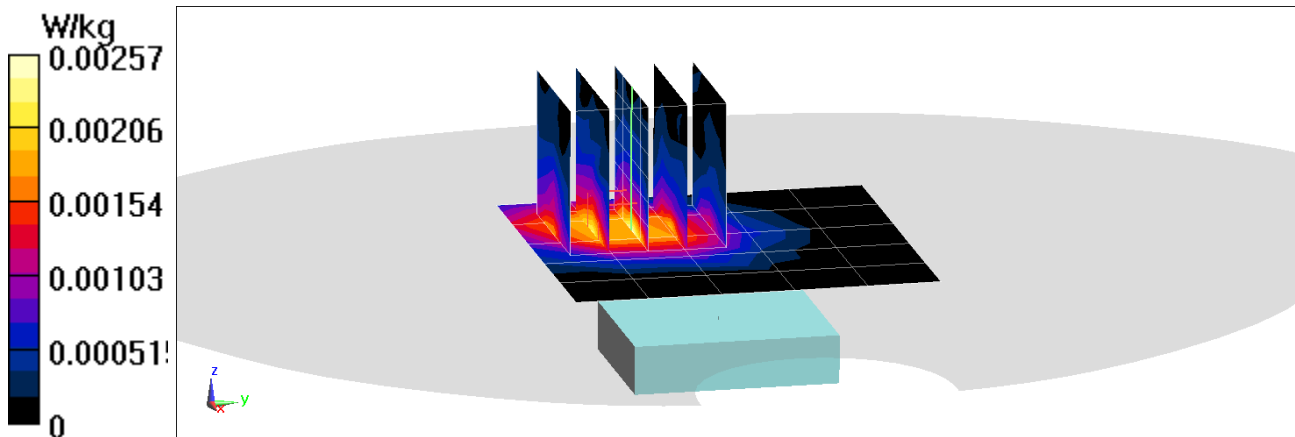

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV004MWCD

Communication System: UID 0, _LTE Band 26; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 835 MHz Head Medium parameters used (interpolated):

$f = 844 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 42.568$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2019; Ambient Temp: 21.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7420; ConvF(9.68, 9.68, 9.68) @ 844 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Head SAR, Front side, High.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Ceramic, Metal Loop Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.099 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.00301 W/kg

SAR(1 g) = 0.000479 W/kg

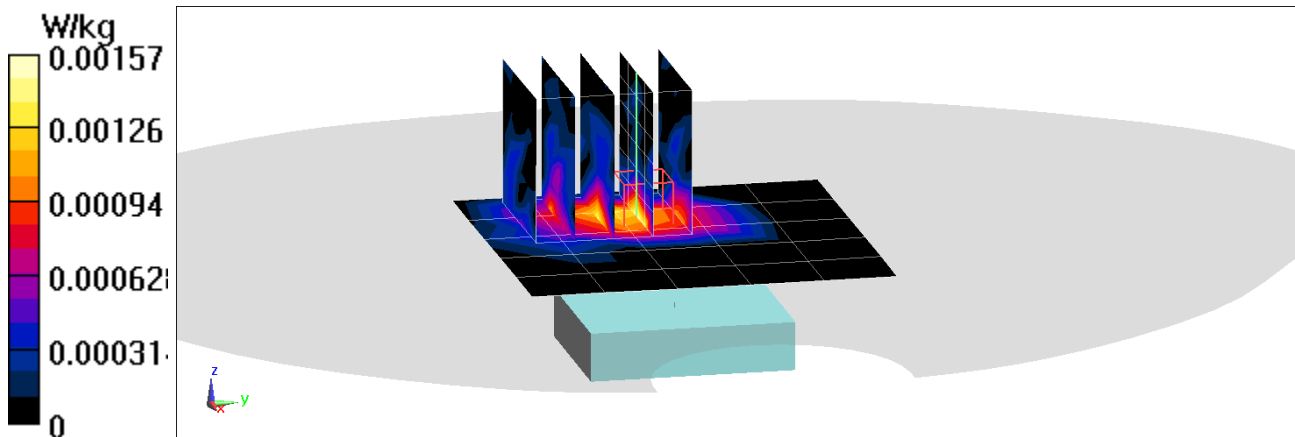

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV004MWCD

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 MHz Head Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 42.597$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2019; Ambient Temp: 21.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7420; ConvF(9.68, 9.68, 9.68) @ 836.5 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Head SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Ceramic, Metal Links Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.189 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.000893 W/kg

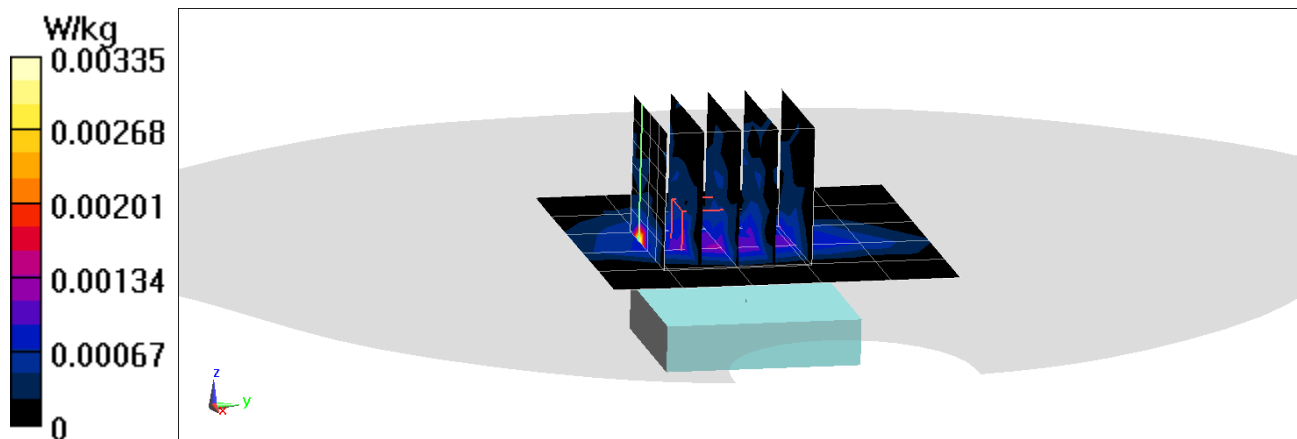

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV004MWCD

Communication System: UID 0, _LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 MHz Head Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.388 \text{ S/m}$; $\epsilon_r = 38.296$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2019; Ambient Temp: 22.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3837; ConvF(8.03, 8.03, 8.03) @ 1770 MHz; Calibrated: 1/28/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/15/2019

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Head SAR, Front side, High ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset
Ceramic, Metal Loop Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.01 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.367 W/kg

SAR(1 g) = 0.224 W/kg

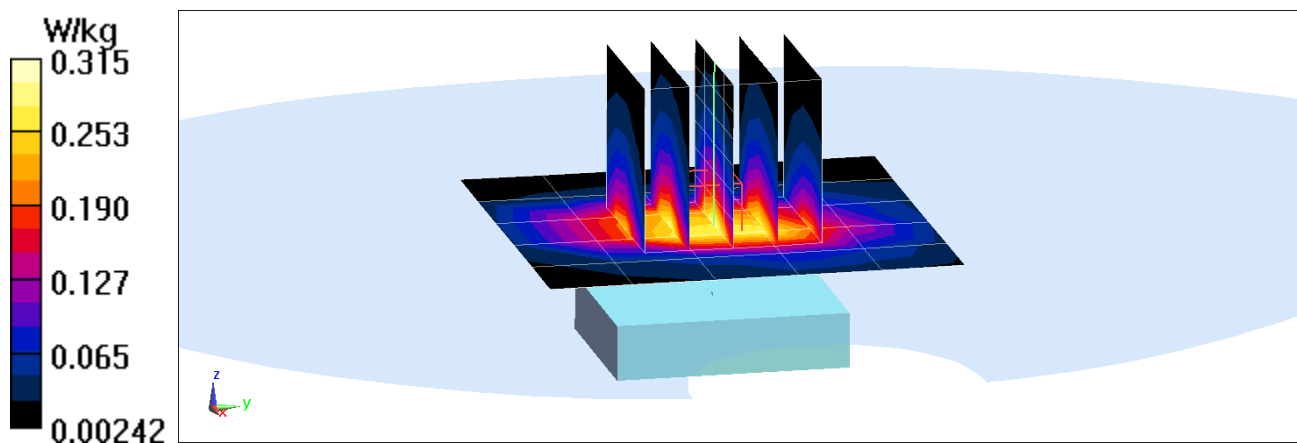

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT00YMW8L

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.424 \text{ S/m}$; $\epsilon_r = 39.422$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-12-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7490; ConvF(8.27, 8.27, 8.27) @ 1882.5 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/15/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Head SAR, Front side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Aluminum, Metal Loop Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.56 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.276 W/kg

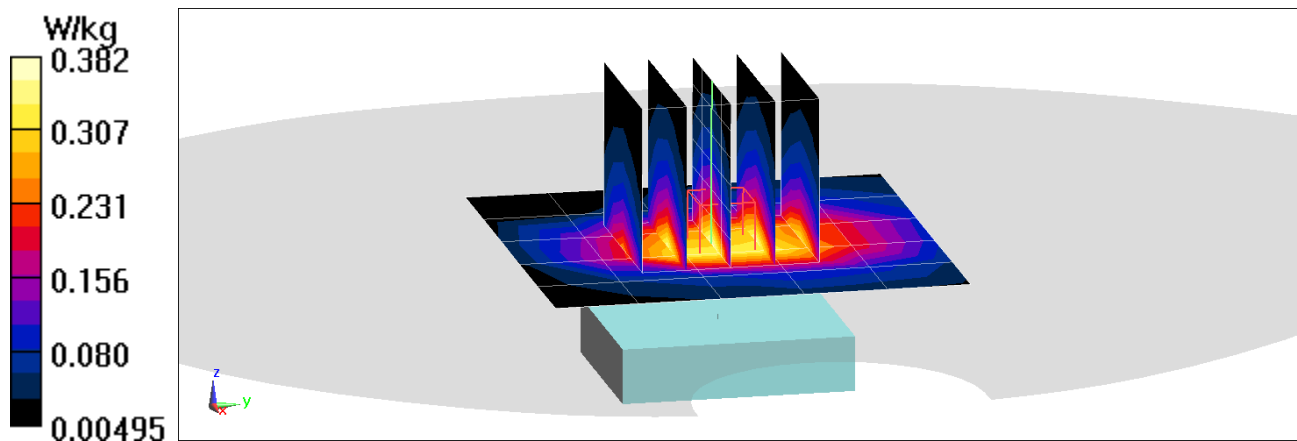

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT00WMW95

Communication System: UID 0, _LTE Band 7; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Head Medium parameters used (interpolated):

$f = 2510 \text{ MHz}$; $\sigma = 1.885 \text{ S/m}$; $\epsilon_r = 38.683$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2019; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7420; ConvF(7.19, 7.19, 7.19) @ 2510 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 7, Head SAR, Front side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Stainless Steel, Sport Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.18 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.516 W/kg

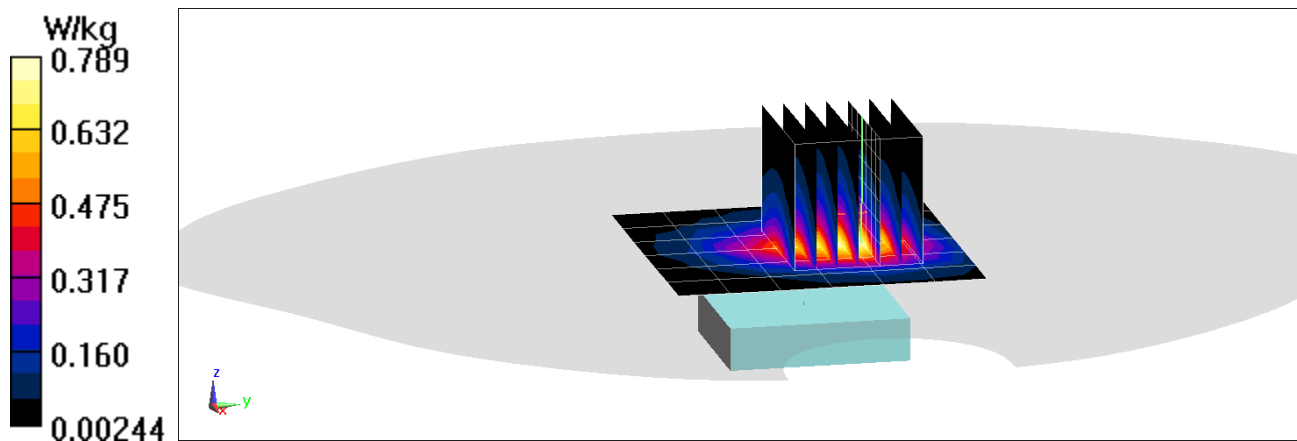

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT007MW95

Communication System: UID 0, _LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 MHz Head Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.688$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2019; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7420; ConvF(7.19, 7.19, 7.19) @ 2506 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41, Head SAR, Front side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset
Stainless Steel, Sport Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.19 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.311 W/kg

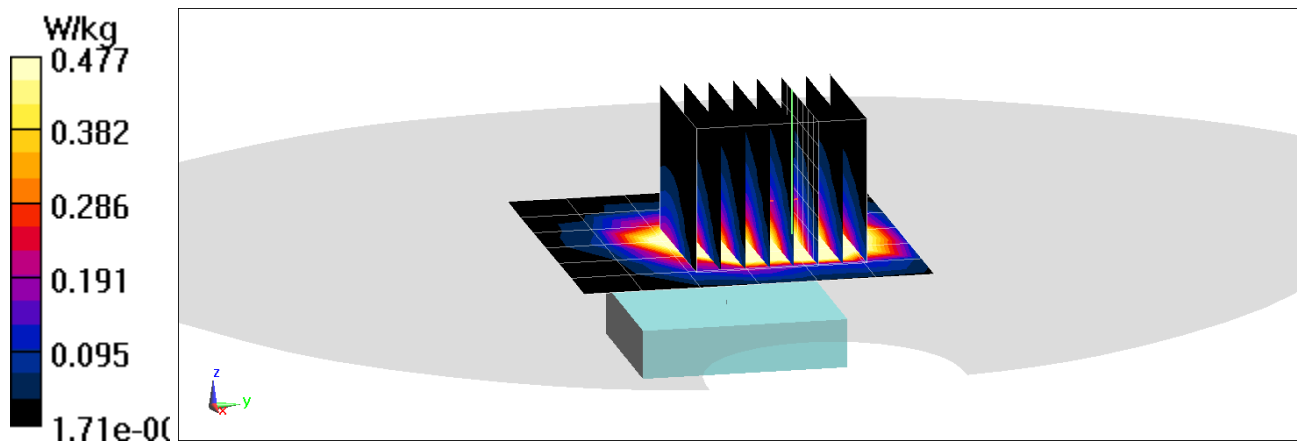

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV01UMWC4

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Head Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.859 \text{ S/m}$; $\epsilon_r = 37.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2019; Ambient Temp: 20.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7416; ConvF(7.4, 7.4, 7.4) @ 2437 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/14/2019

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Head SAR, Ch 6, 1 Mbps, Front Side
Titanium, Sport Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.506 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.214 W/kg

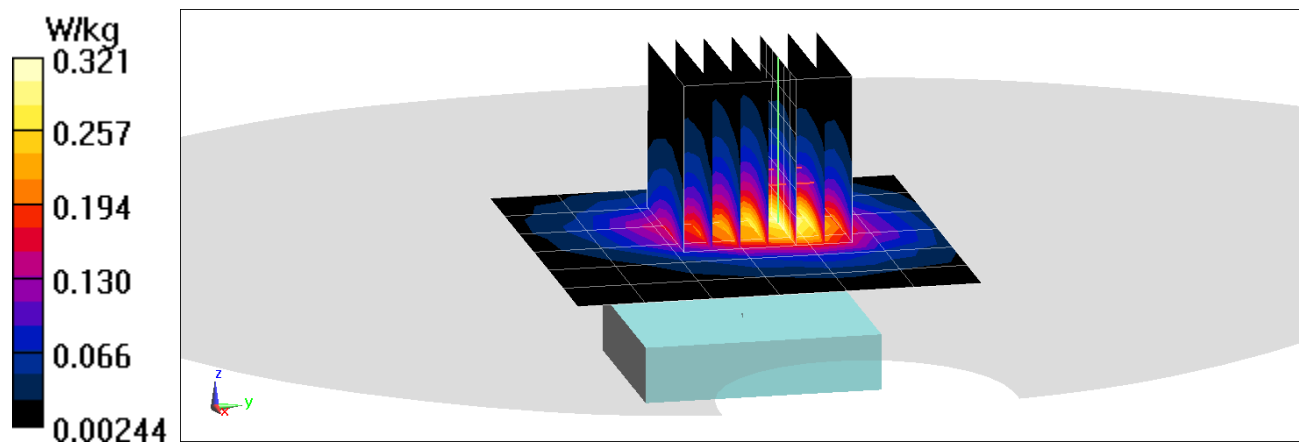

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT013MW8L

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Head Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$; $\sigma = 1.833 \text{ S/m}$; $\epsilon_r = 37.525$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2019; Ambient Temp: 20.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7416; ConvF(7.4, 7.4, 7.4) @ 2402 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/14/2019

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: Bluetooth, Head SAR, Ch 0, 1 Mbps, Front Side
Aluminum, Sport Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.800 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.100 W/kg

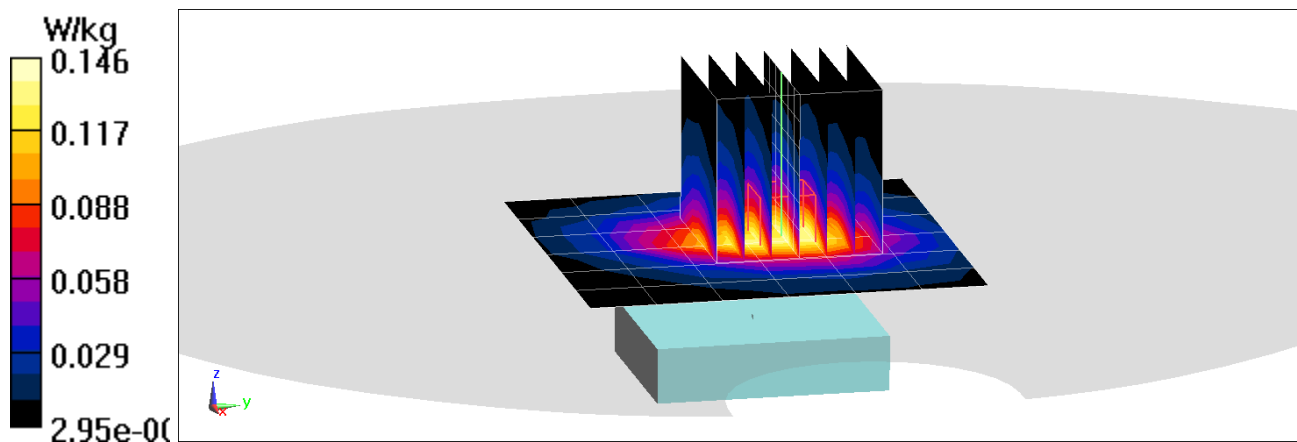

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT00VMW8L

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 MHz Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.013 \text{ S/m}$; $\epsilon_r = 53.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-27-2019; Ambient Temp: 23.9°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7420; ConvF(9.61, 9.61, 9.61) @ 836.6 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Extremity SAR, Back side, Mid.ch
Aluminum, Metal Links Wrist Band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.76 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(10 g) = 0.160 W/kg

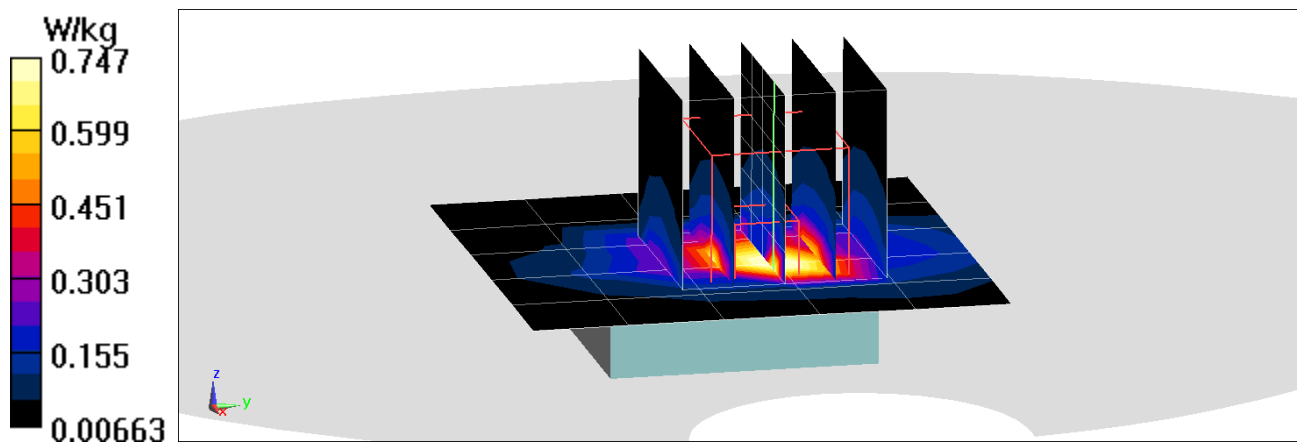

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV001MWCD

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 MHz Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.42 \text{ S/m}$; $\epsilon_r = 51.89$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-08-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3837; ConvF(7.72, 7.72, 7.72) @ 1732.4 MHz; Calibrated: 1/28/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/15/2019

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Extremity SAR, Back side, Mid.ch
Ceramic, Metal Loop Wrist Band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.45 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(10 g) = 0.103 W/kg

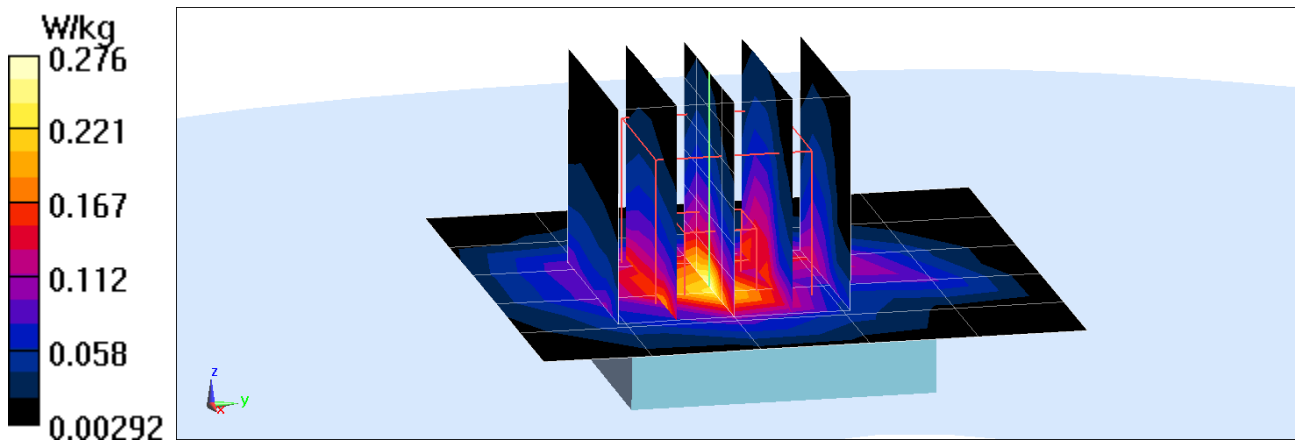

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT010MW8L

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.573 \text{ S/m}$; $\epsilon_r = 53.191$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-08-2019; Ambient Temp: 23.3°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7532; ConvF(8.03, 8.03, 8.03) @ 1880 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Extremity SAR, Back side, Mid.ch
Aluminum, Sport Wrist Band


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.063 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(10 g) = 0.053 W/kg

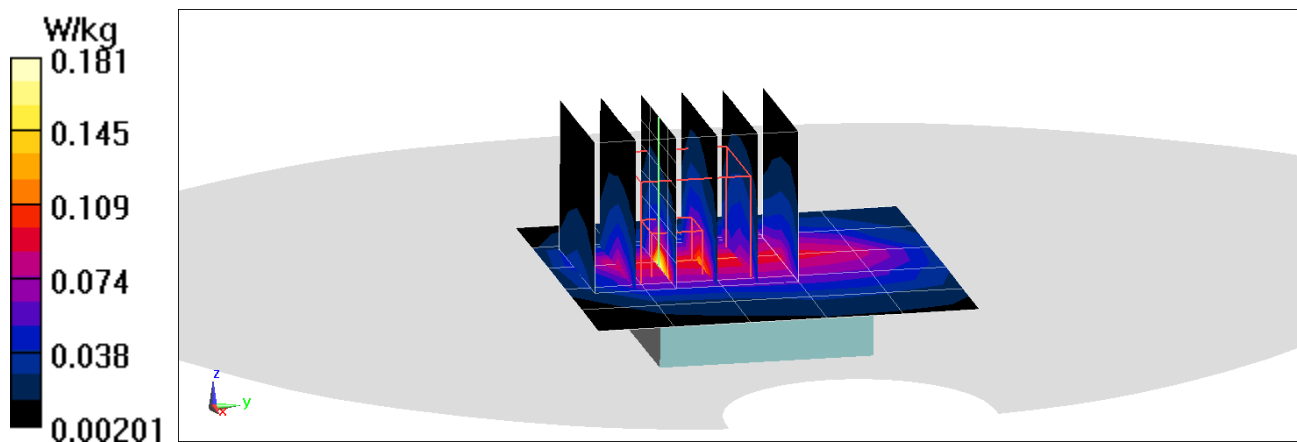

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT011MW8L

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 MHz Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.966 \text{ S/m}$; $\epsilon_r = 53.761$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-27-2019; Ambient Temp: 23.9°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7420; ConvF(9.71, 9.71, 9.71) @ 707.5 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Extremity SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset
Aluminum, Metal Links Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.08 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(10 g) = 0.168 W/kg

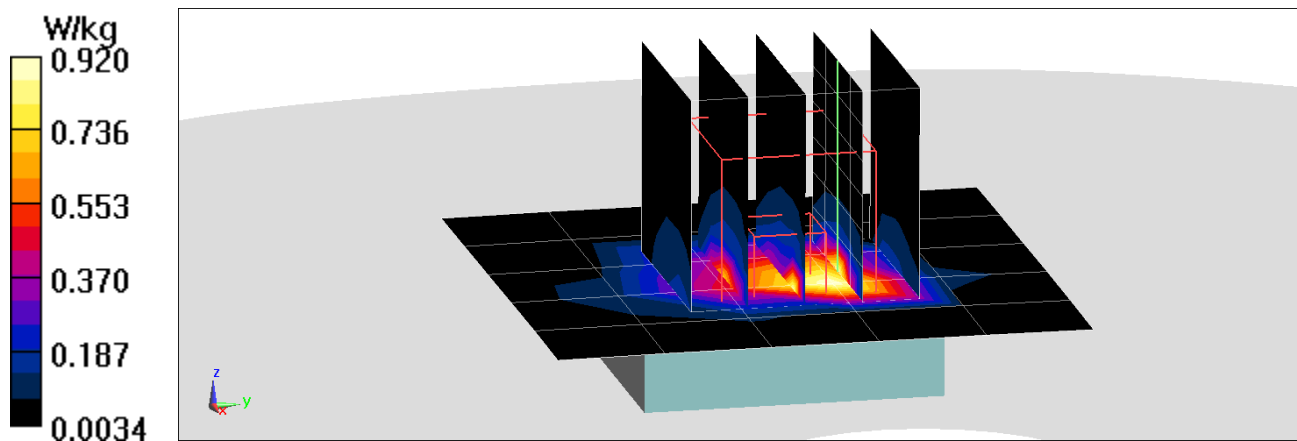

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT010MW8L

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 MHz Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.992 \text{ S/m}$; $\epsilon_r = 53.61$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-27-2019; Ambient Temp: 23.9°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7420; ConvF(9.71, 9.71, 9.71) @ 782 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Extremity SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset,
Aluminum, Metal Links Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.28 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(10 g) = 0.229 W/kg

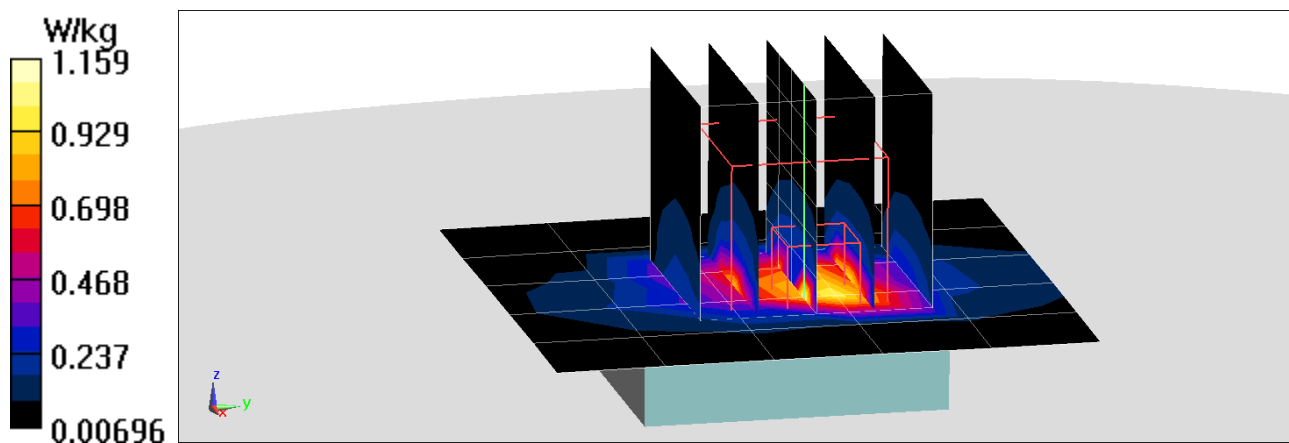

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT010MW8L

Communication System: UID 0, _LTE Band 26; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 835 MHz Body Medium parameters used (interpolated):

$f = 844 \text{ MHz}$; $\sigma = 1.016 \text{ S/m}$; $\epsilon_r = 53.48$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-27-2019; Ambient Temp: 23.9°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7420; ConvF(9.61, 9.61, 9.61) @ 844 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Extremity SAR, Back side, High.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Aluminum, Metal Links Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.00 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(10 g) = 0.175 W/kg

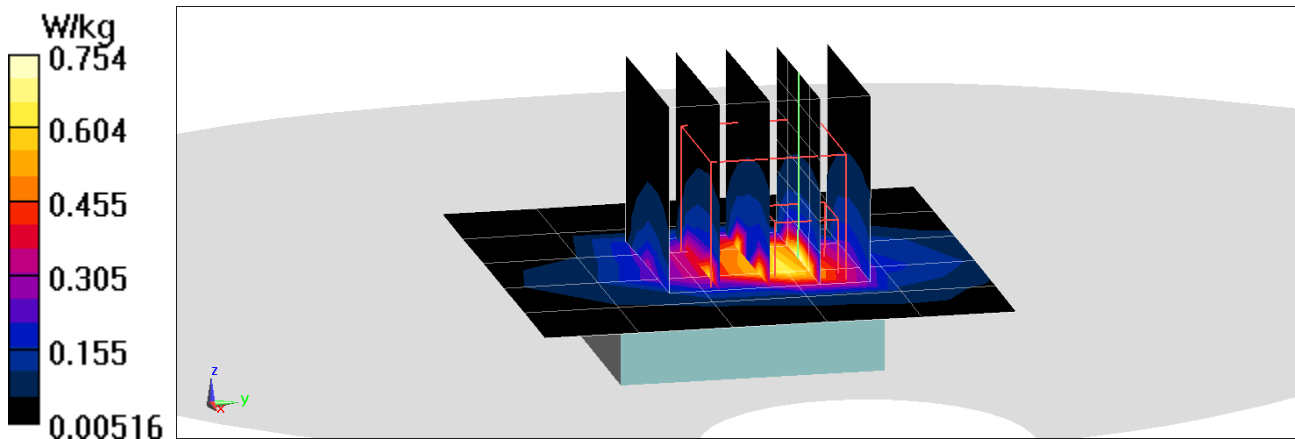

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT011MW8L

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 MHz Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 1.013 \text{ S/m}$; $\epsilon_r = 53.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-27-2019; Ambient Temp: 23.9°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7420; ConvF(9.61, 9.61, 9.61) @ 836.5 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Extremity SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Aluminum, Metal Links Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.18 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(10 g) = 0.160 W/kg

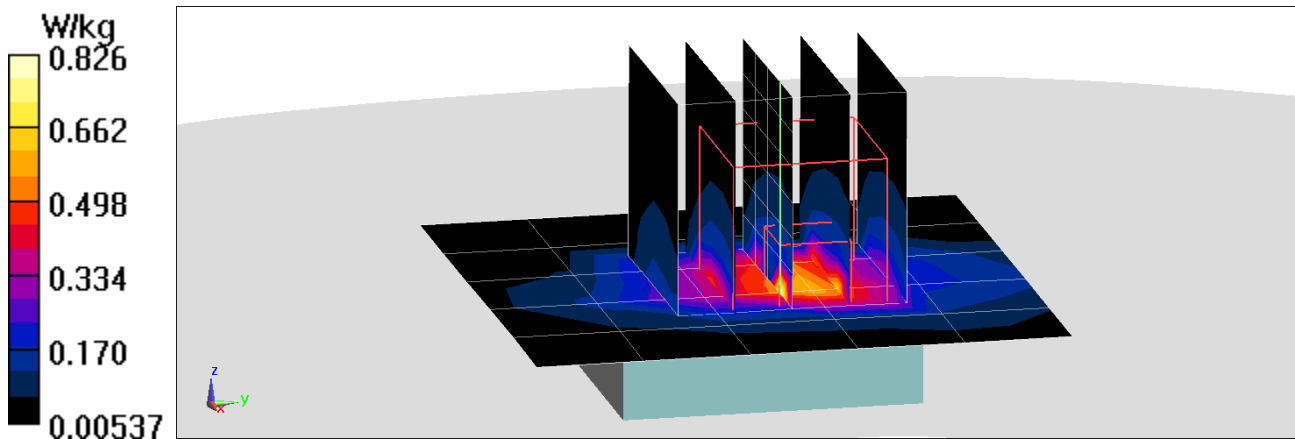

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV004MWCD

Communication System: UID 0, _LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 MHz Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.446 \text{ S/m}$; $\epsilon_r = 51.841$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-08-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3837; ConvF(7.72, 7.72, 7.72) @ 1770 MHz; Calibrated: 1/28/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/15/2019

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Extremity SAR, Back side, High. ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset
Ceramic, Metal Links Wrist Band**


Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.624 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(10 g) = 0.058 W/kg

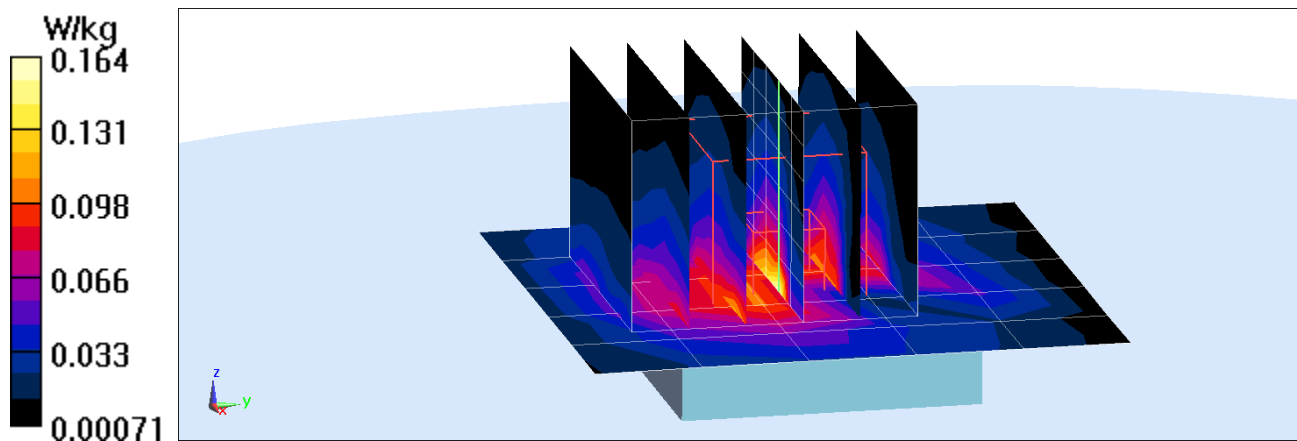

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV004MWCD

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Body Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.575 \text{ S/m}$; $\epsilon_r = 53.189$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-08-2019; Ambient Temp: 23.3°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7532; ConvF(8.03, 8.03, 8.03) @ 1882.5 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Extremity SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Ceramic, Sport Wrist Band**


Area Scan (6x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.88 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(10 g) = 0.093 W/kg

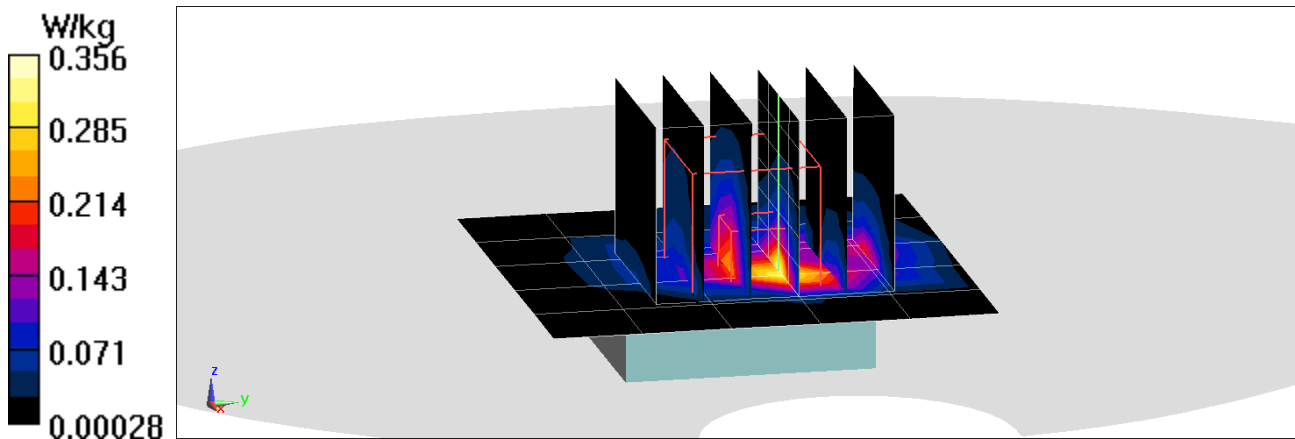

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT00NMW95

Communication System: UID 0, _LTE Band 7; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used (interpolated):

$f = 2510 \text{ MHz}$; $\sigma = 2.064 \text{ S/m}$; $\epsilon_r = 51.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-13-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2510 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 7, Extremity SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Stainless Steel, Metal Loop Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (9x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.95 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(10 g) = 0.207 W/kg

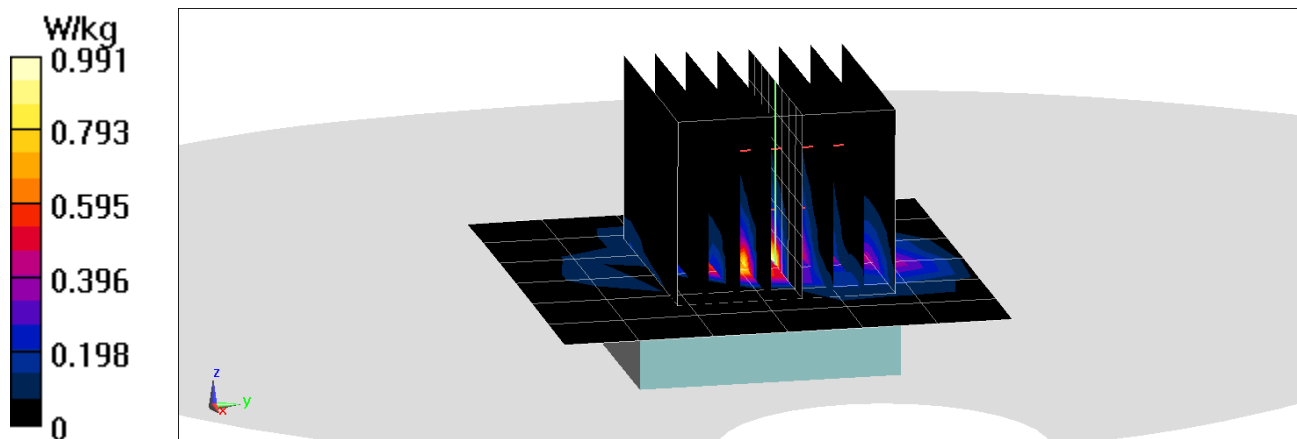

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV001MWCD

Communication System: UID 0, _LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 MHz Body Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 2.096 \text{ S/m}$; $\epsilon_r = 51.905$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-11-2019; Ambient Temp: 23.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2506 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41, Extremity SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset
Ceramic, Metal Loop Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (9x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.18 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(10 g) = 0.103 W/kg

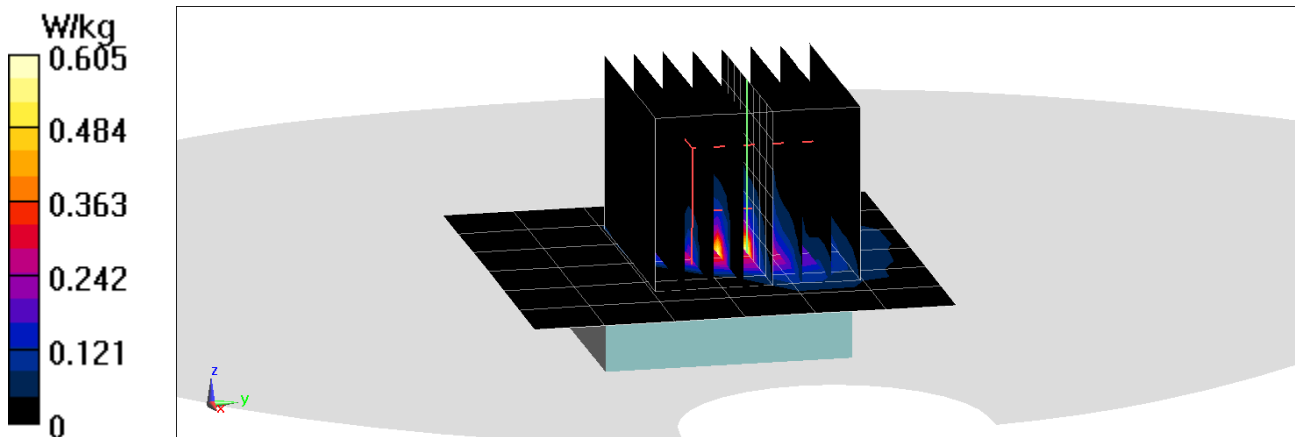

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YT00NMW95

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.016 \text{ S/m}$; $\epsilon_r = 52.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-24-2019; Ambient Temp: 23.4°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7420; ConvF(7.34, 7.34, 7.34) @ 2437 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Extremity SAR, Ch 6, 1 Mbps, Back Side
Stainless Steel, Metal Links Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4000 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(10 g) = 0.101 W/kg

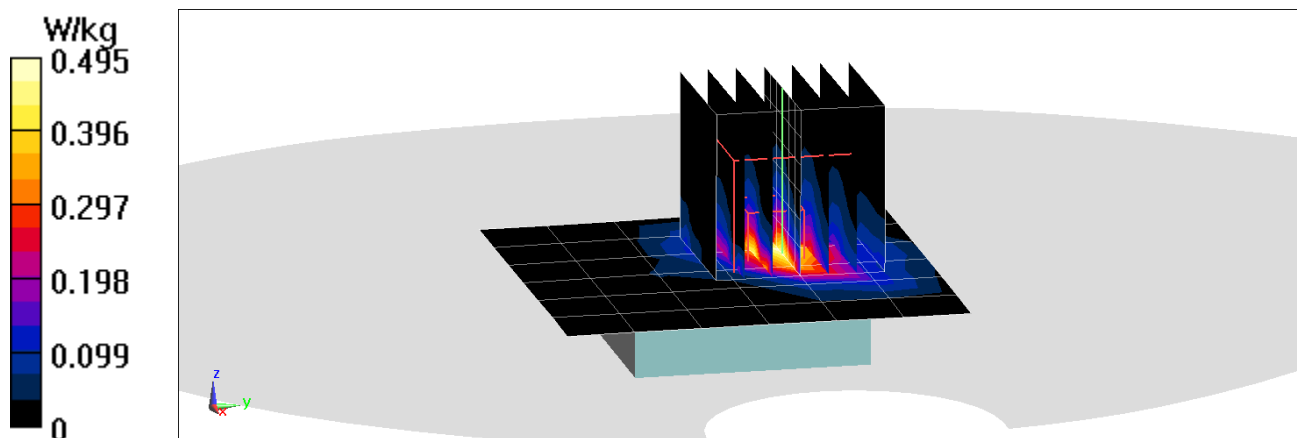

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCG-A2095; Type: Watch; Serial: D92YV01VMWC4

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$; $\sigma = 1.993 \text{ S/m}$; $\epsilon_r = 50.561$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-02-2019; Ambient Temp: 23.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7420; ConvF(7.34, 7.34, 7.34) @ 2402 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: Bluetooth, Extremity SAR, Ch 0, 1 Mbps, Back Side
Titanium, Metal Loop Wrist Band**


Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.515 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(10 g) = 0.023 W/kg

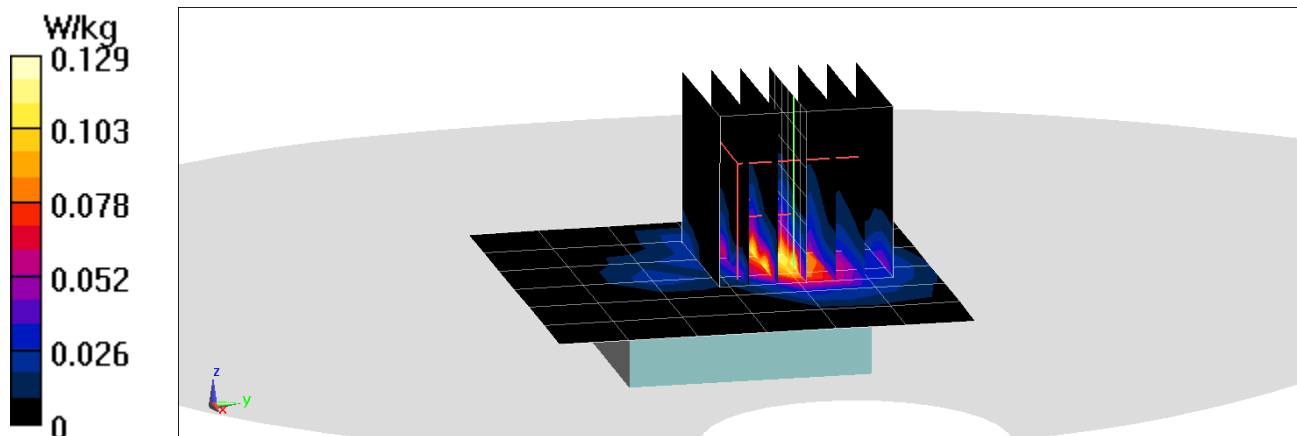

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1097

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 41.367$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-15-2019; Ambient Temp: 21.2°C; Tissue Temp: 20.3°C

Probe: ES3DV3 - SN3318; ConvF(6.6, 6.6, 6.6) @ 750 MHz; Calibrated: 11/19/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 8/14/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 1.68 W/kg

Deviation(1 g) = 2.19%

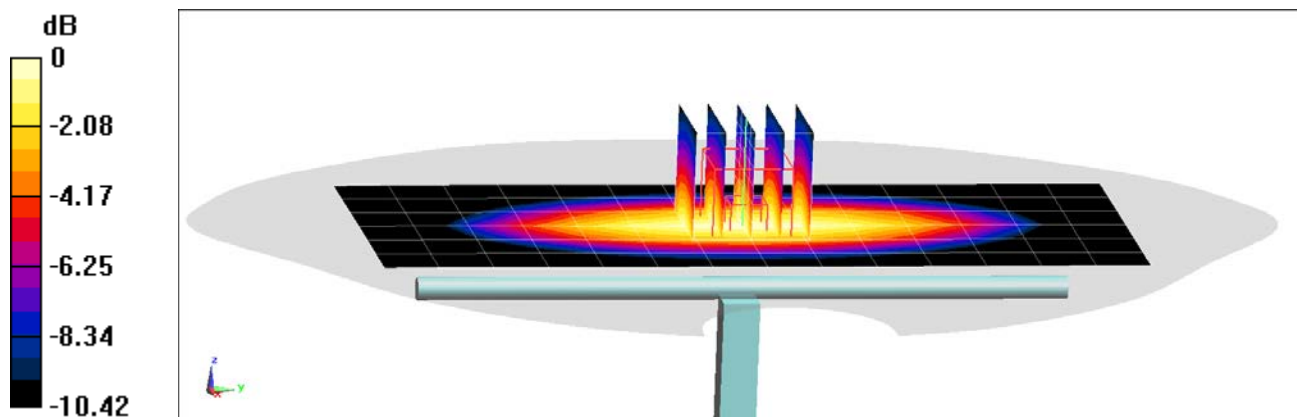

0 dB = 1.97 W/kg = 2.94 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1010

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 835 MHz Head Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 42.545$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-08-2019; Ambient Temp: 21.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7420; ConvF(9.68, 9.68, 9.68) @ 850 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 2.06 W/kg

Deviation(1 g) = 3.73%

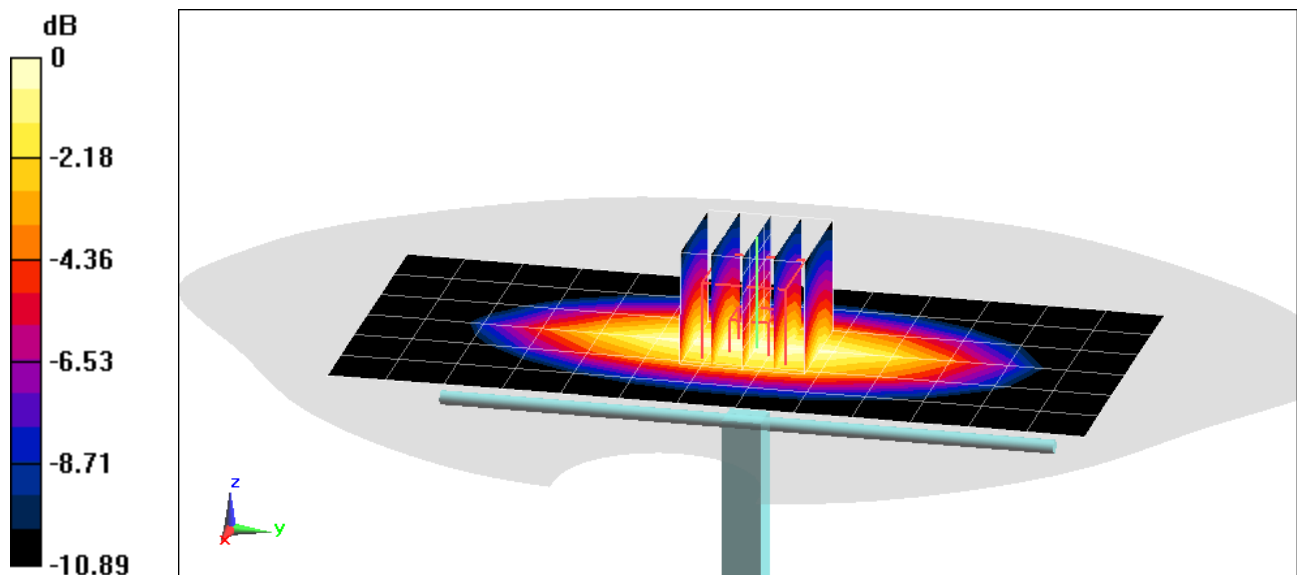

0 dB = 2.85 W/kg = 4.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 MHz Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 41.499$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-15-2019; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7532; ConvF(10.45, 10.45, 10.45) @ 835 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.87 W/kg

Deviation(1 g) = -2.60%

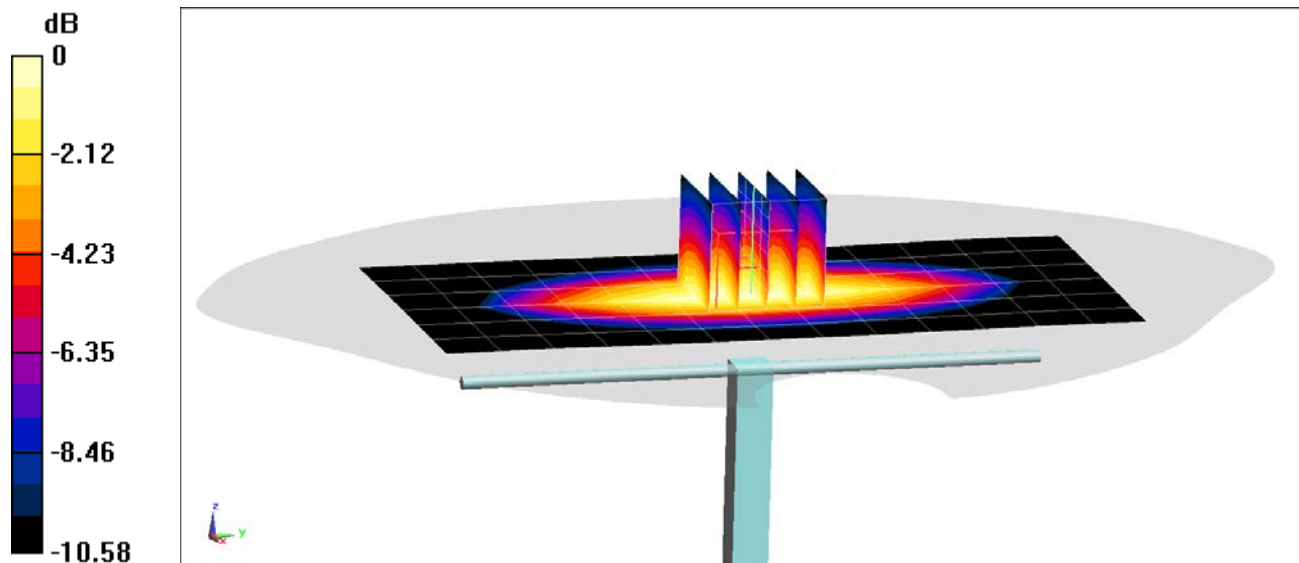

0 dB = 2.46 W/kg = 3.91 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1092

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 MHz Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.357 \text{ S/m}$; $\epsilon_r = 40.292$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-12-2019; Ambient Temp: 20.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3837; ConvF(8.03, 8.03, 8.03) @ 1750 MHz; Calibrated: 1/28/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/15/2019

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.25 W/kg

SAR(1 g) = 3.78 W/kgg

Deviation(1 g) = 4.71%

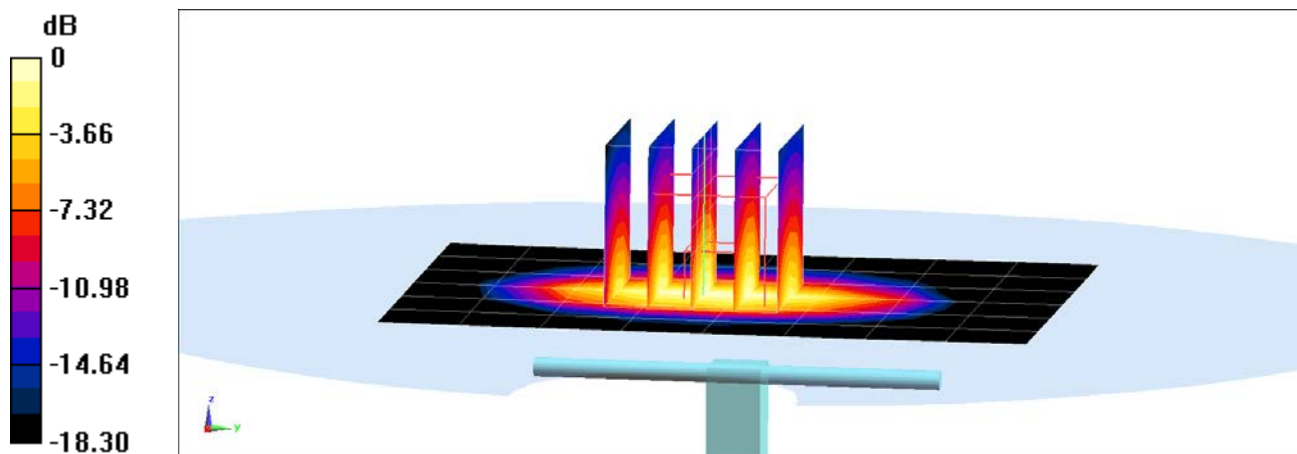

0 dB = 5.67 W/kg = 7.54 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1092

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 MHz Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.369 \text{ S/m}$; $\epsilon_r = 38.395$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2019; Ambient Temp: 22.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3837; ConvF(8.03, 8.03, 8.03) @ 1750 MHz; Calibrated: 1/28/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/15/2019

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.35 W/kg

SAR(1 g) = 3.86 W/kg

Deviation(1 g) = 6.93%

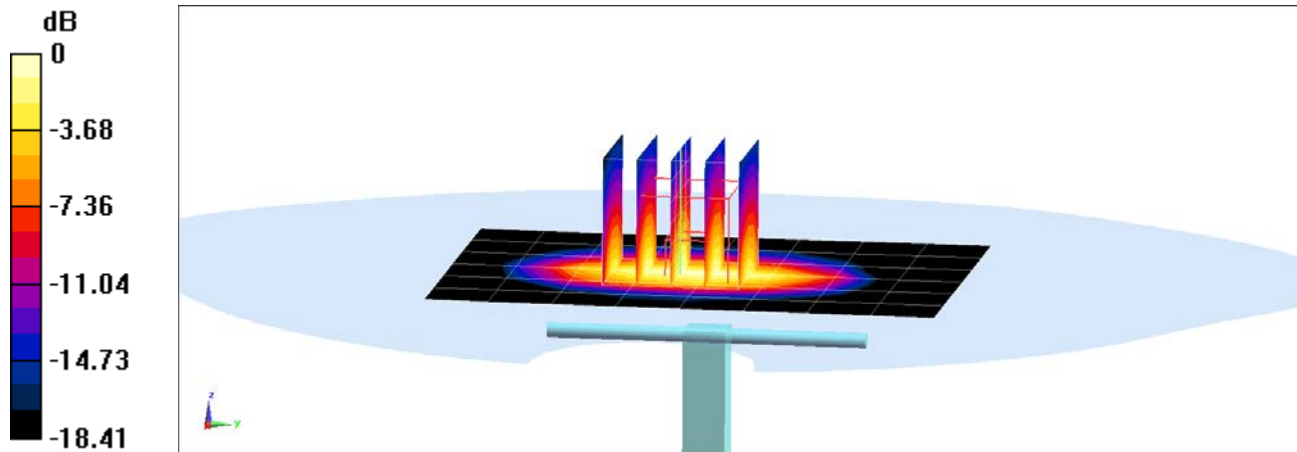

0 dB = 5.75 W/kg = 7.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d026

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.445 \text{ S/m}$; $\epsilon_r = 39.526$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-09-2019; Ambient Temp: 19.7°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3318; ConvF(5.19, 5.19, 5.19) @ 1900 MHz; Calibrated: 11/19/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 8/14/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.59 W/kg

SAR(1 g) = 4.11 W/kg

Deviation(1 g) = 2.24%

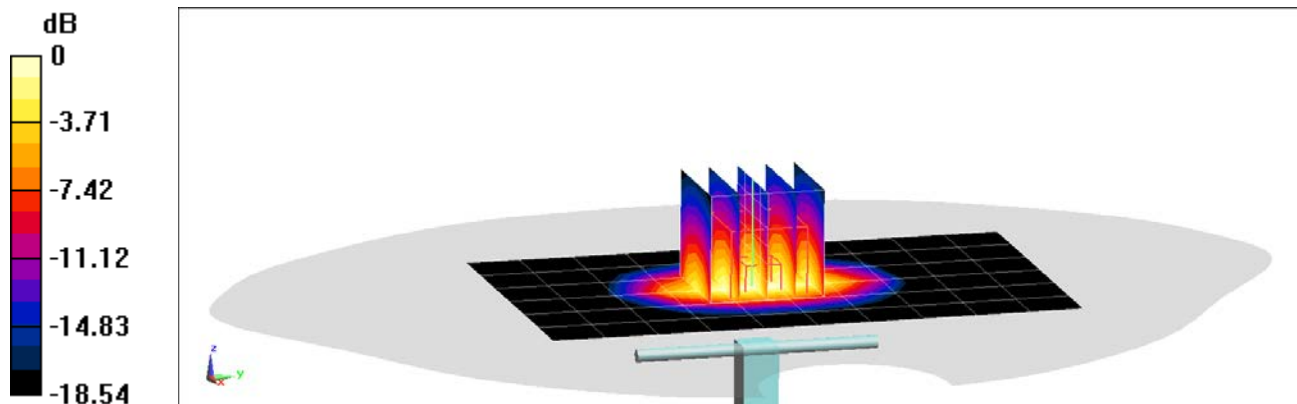

0 dB = 5.23 W/kg = 7.19 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d026

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.442 \text{ S/m}$; $\epsilon_r = 39.337$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-12-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7490; ConvF(8.27, 8.27, 8.27) @ 1900 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/15/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.31 W/kg

SAR(1 g) = 3.86 W/kg

Deviation(1 g) = -3.98%

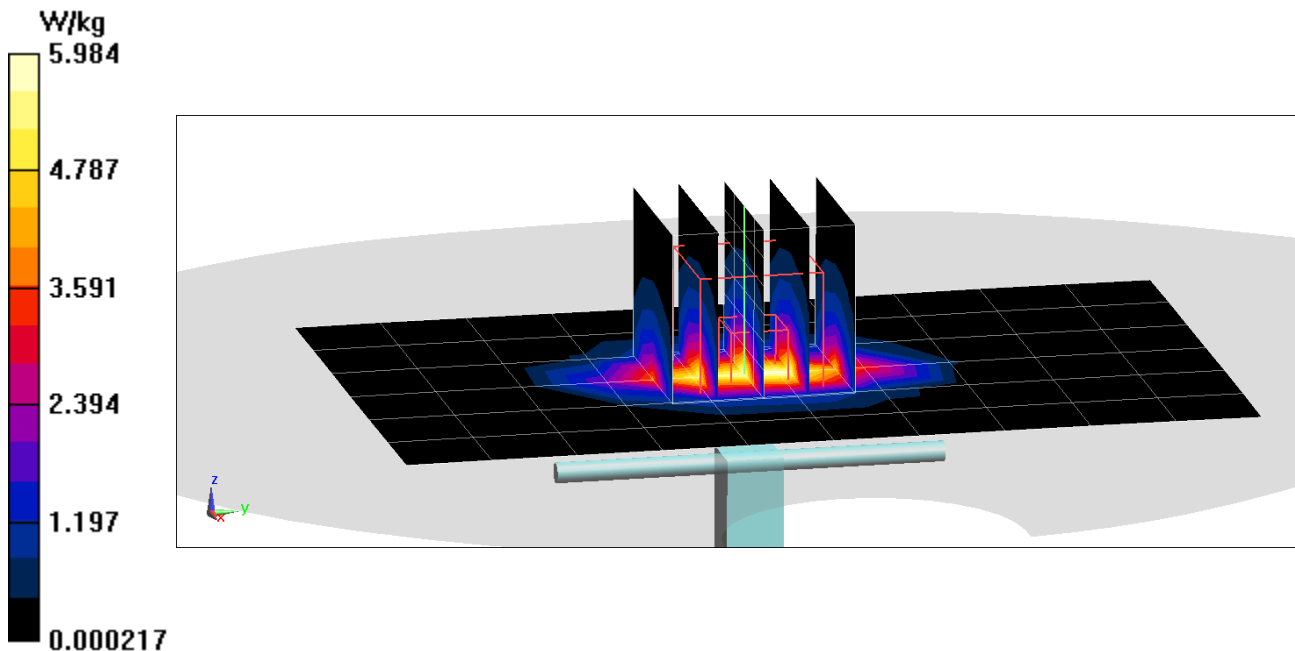

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.869 \text{ S/m}$; $\epsilon_r = 37.439$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2019; Ambient Temp: 20.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7416; ConvF(7.4, 7.4, 7.4) @ 2450 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/14/2019

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 4.93 W/kgg

Deviation(1 g) = -7.16%

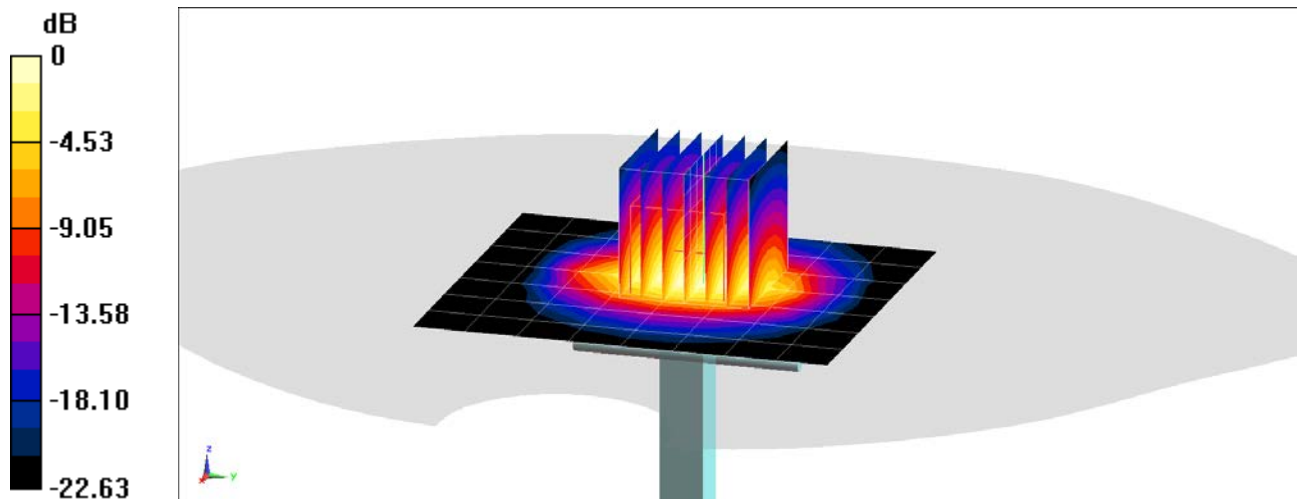

0 dB = 8.15 W/kg = 9.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.837 \text{ S/m}$; $\epsilon_r = 38.796$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2019; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7420; ConvF(7.19, 7.19, 7.19) @ 2450 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.19 W/kg

Deviation(1 g) = -2.26%

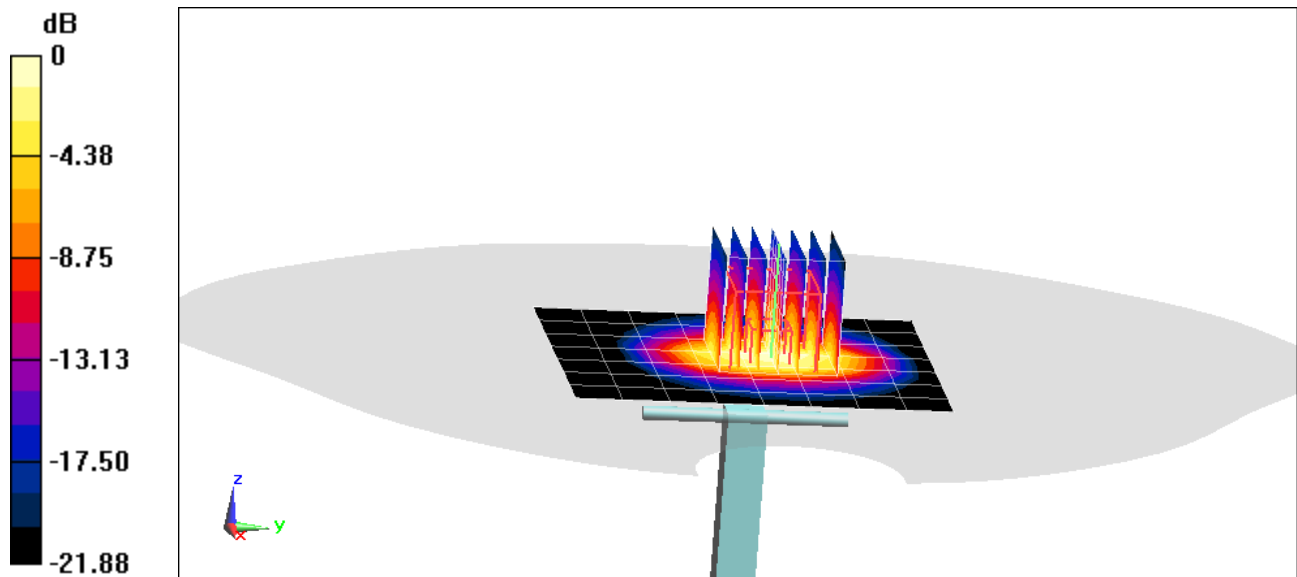

0 dB = 8.74 W/kg = 9.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1042

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Head Medium parameters used:

$f = 2600$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 38.532$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-10-2019; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7420; ConvF(7.11, 7.11, 7.11) @ 2600 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 13.7 W/kg

SAR(1 g) = 6.1 W/kg

Deviation(1 g) = 5.72%

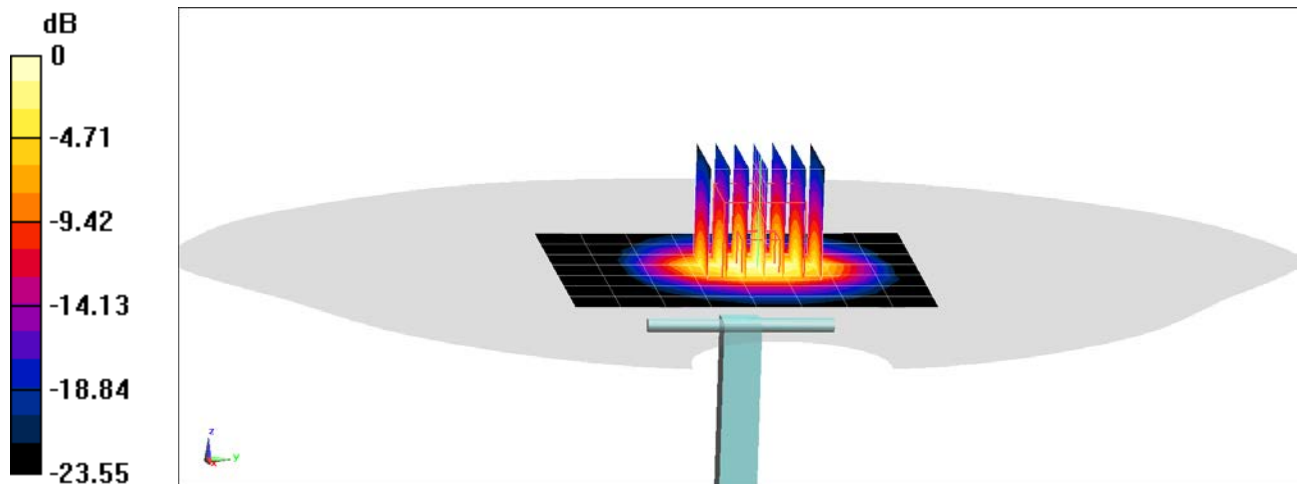

0 dB = 10.7 W/kg = 10.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1097

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 53.667$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-27-2019; Ambient Temp: 23.9°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7420; ConvF(9.71, 9.71, 9.71) @ 750 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.82 W/kg

SAR(10 g) = 1.19 W/kg

Deviation(10 g) = 4.75%

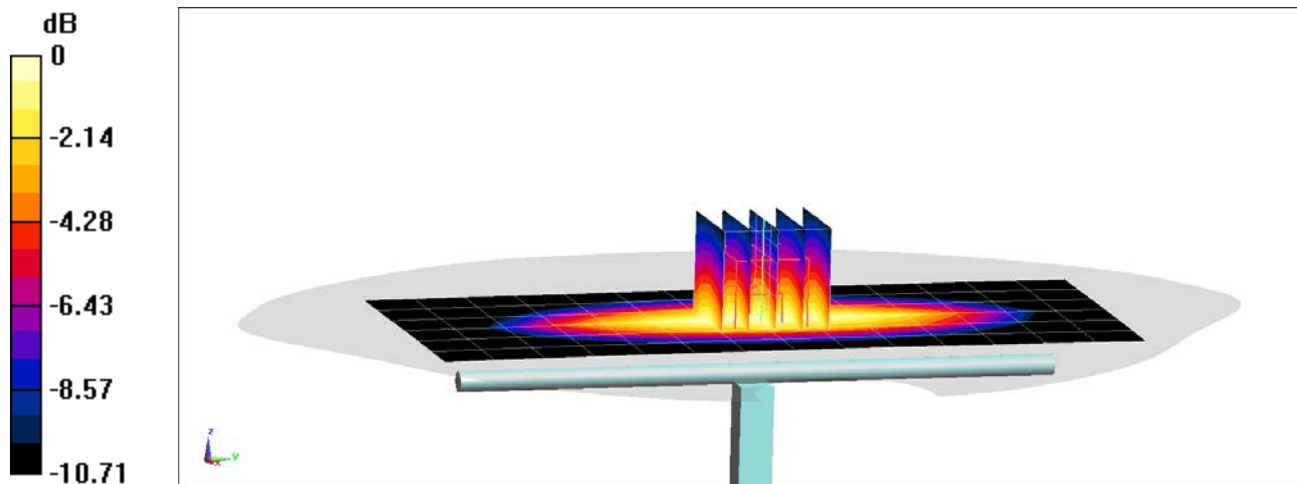

0 dB = 2.47 W/kg = 3.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1010

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 835 MHz Body Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 1.019 \text{ S/m}$; $\epsilon_r = 53.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-27-2019; Ambient Temp: 23.9°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7420; ConvF(9.61, 9.61, 9.61) @ 850 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.27 W/kg

SAR(10 g) = 1.4 W/kg

Deviation(10 g) = 4.79%

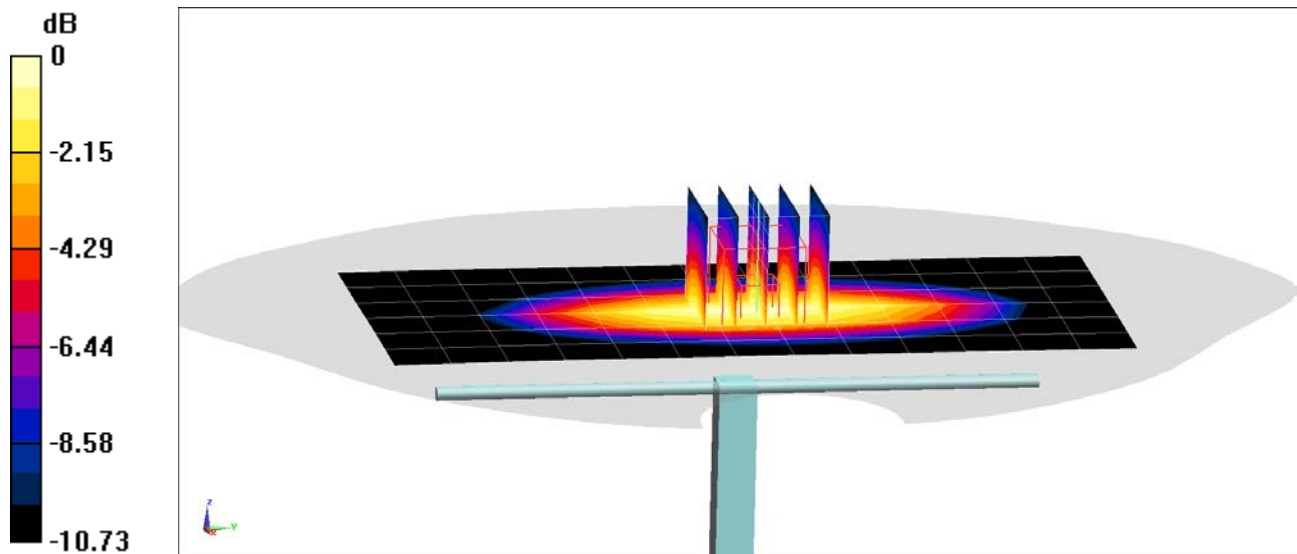

0 dB = 2.89 W/kg = 4.61 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1092

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 MHz Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.432 \text{ S/m}$; $\epsilon_r = 51.872$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2019; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3837; ConvF(7.72, 7.72, 7.72) @ 1750 MHz; Calibrated: 1/28/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/15/2019

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.03 W/kg

SAR(10 g) = 1.99 W/kg

Deviation(10 g) = 2.58%

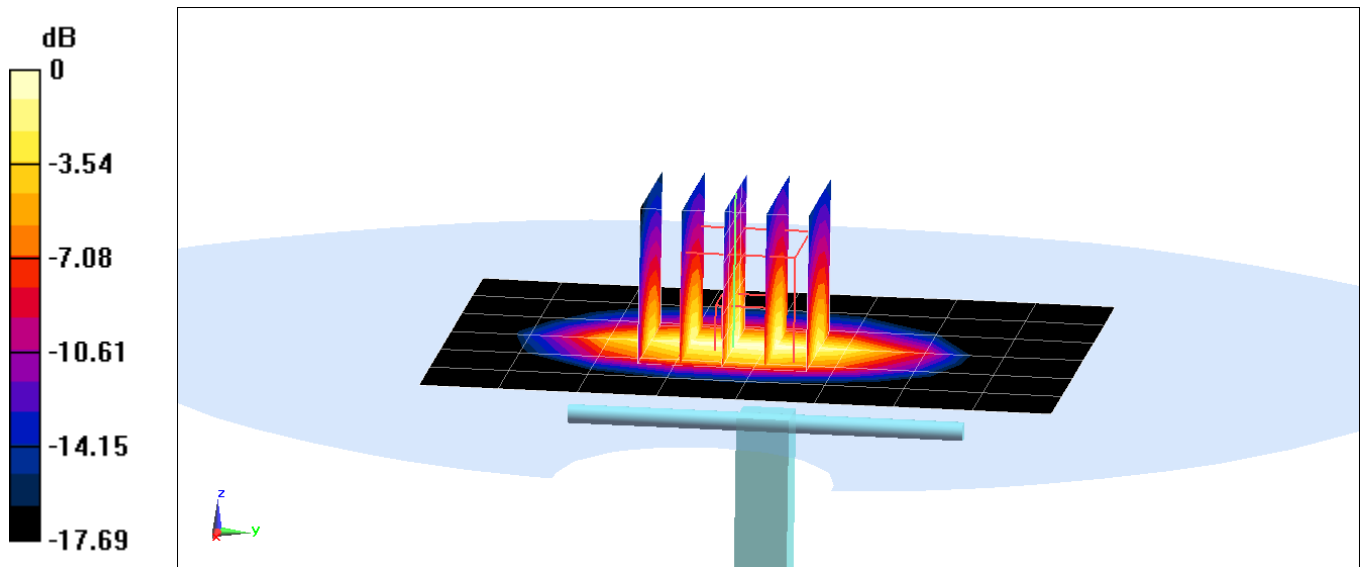

0 dB = 5.55 W/kg = 7.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d026

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.587 \text{ S/m}$; $\epsilon_r = 53.179$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2019; Ambient Temp: 23.3°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7532; ConvF(8.03, 8.03, 8.03) @ 1900 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.48 W/kg

SAR(10 g) = 2.13 W/kg

Deviation(10 g) = 0.47%

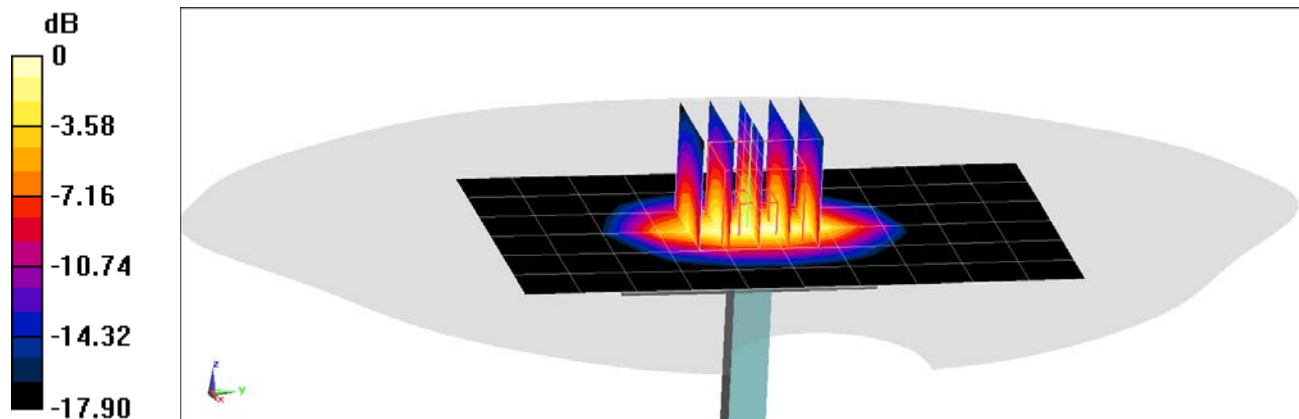

0 dB = 6.35 W/kg = 8.03 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.028 \text{ S/m}$; $\epsilon_r = 52.26$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-24-2019; Ambient Temp: 23.4°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7420; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.5 W/kg

SAR(10 g) = 2.54 W/kg

Deviation(10 g) = 6.72%

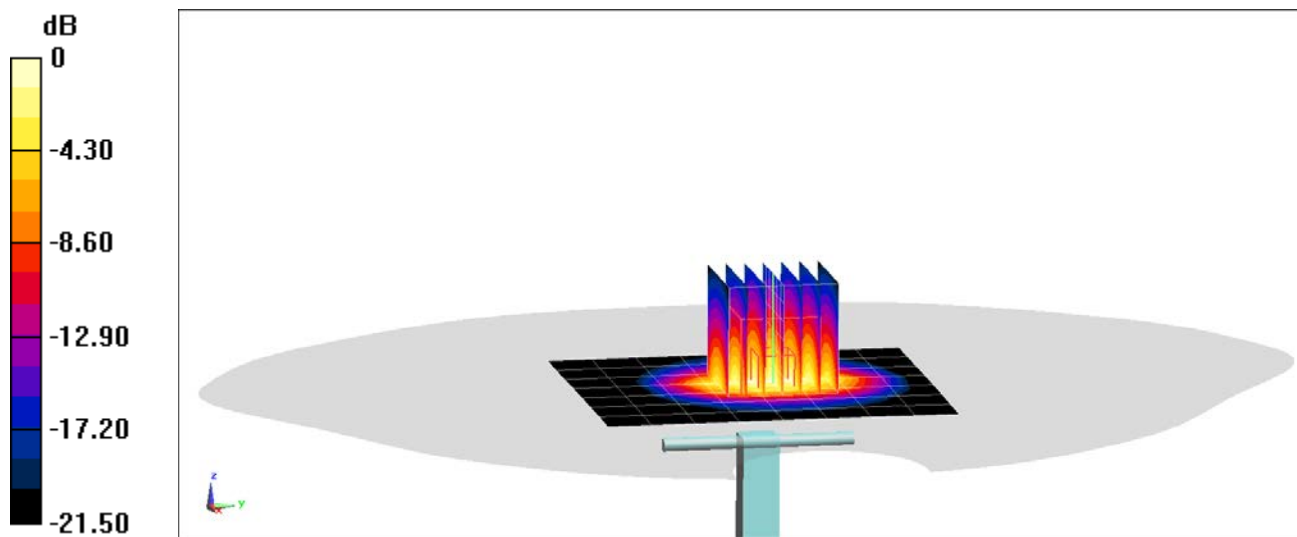

0 dB = 9.30 W/kg = 9.68 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.038 \text{ S/m}$; $\epsilon_r = 50.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-02-2019; Ambient Temp: 23.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7420; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 9/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 11/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.5 W/kg

SAR(10 g) = 2.51 W/kg

Deviation(10 g) = 5.46%

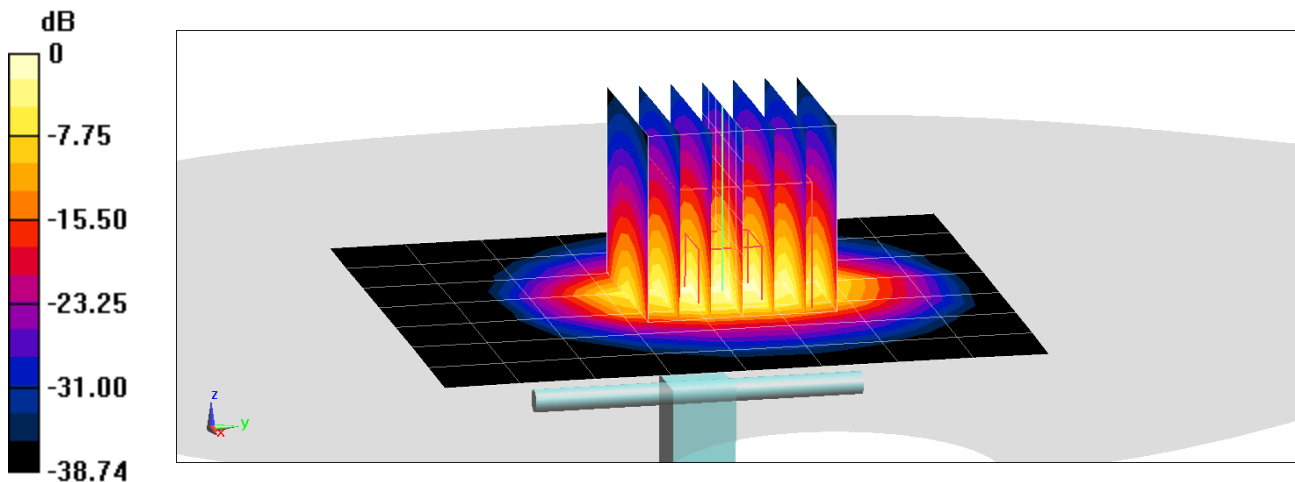

0 dB = 7.69 W/kg = 8.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.042 \text{ S/m}$; $\epsilon_r = 52.001$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-11-2019; Ambient Temp: 23.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2450 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.8 W/kg

SAR(10 g) = 2.5 W/kg

Deviation(10 g) = 3.73%

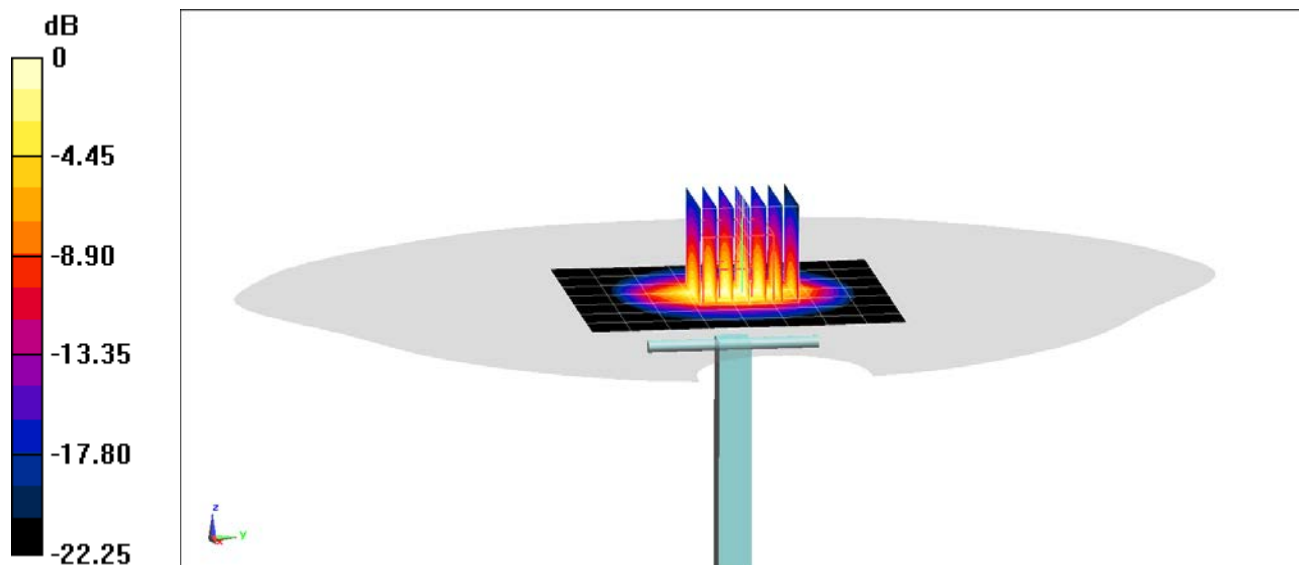

0 dB = 8.77 W/kg = 9.43 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.005 \text{ S/m}$; $\epsilon_r = 51.564$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-13-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2450 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.6 W/kg

SAR(10 g) = 2.45 W/kg

Deviation(10 g) = 1.66%

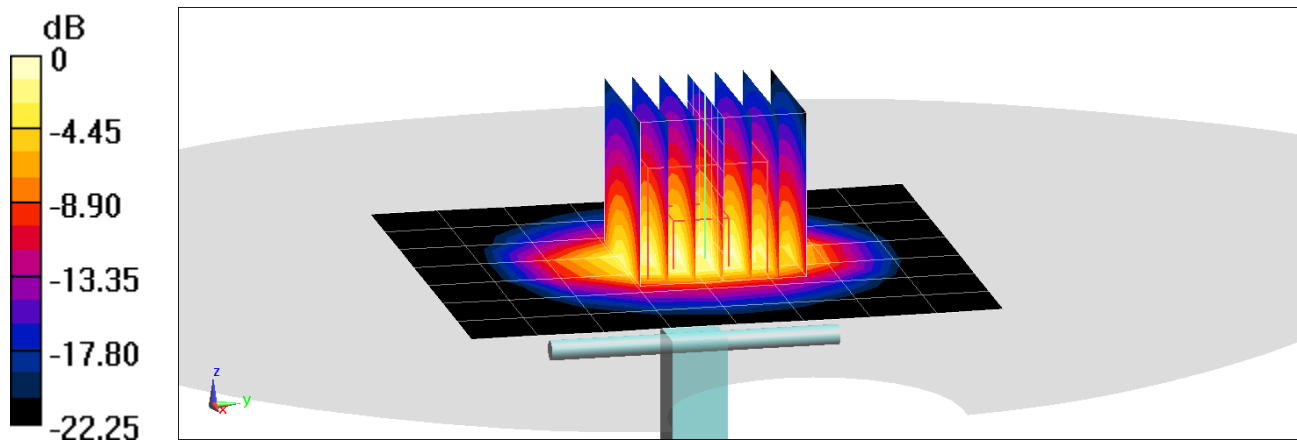

0 dB = 8.63 W/kg = 9.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1042

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.15 \text{ S/m}$; $\epsilon_r = 51.31$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-13-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7532; ConvF(7.47, 7.47, 7.47) @ 2600 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.3 W/kg

SAR(10 g) = 2.46 W/kg

Deviation(10 g) = -1.20%

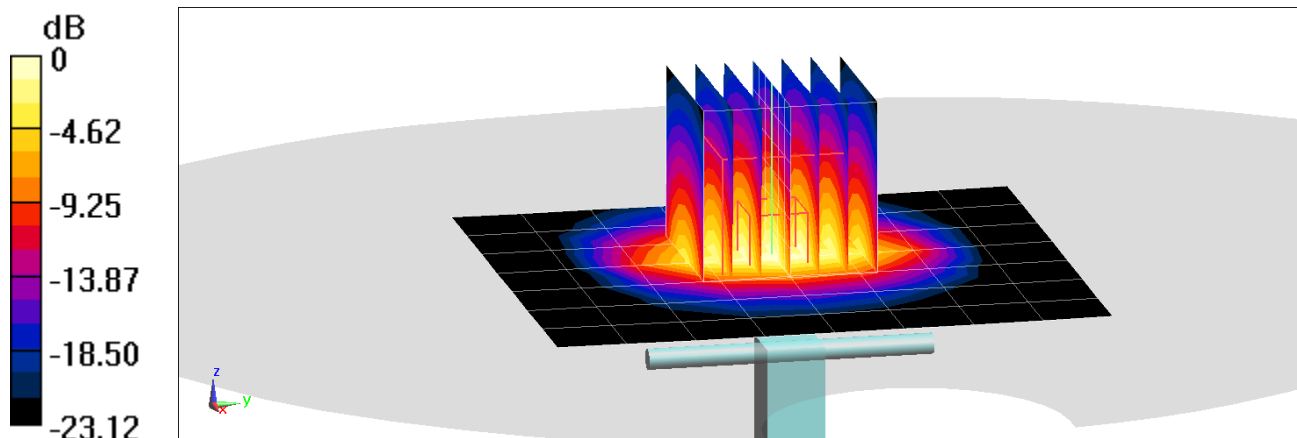

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PG Test**

Certificate No: **D750V3-1097_Sep17**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1097**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

SC ✓
 10/03/2017

Calibration date: **September 08, 2017**

SC ✓
 9/8/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** Name
Laboratory Technician Function

Signature

Approved by: **Katja Pokojic** Name
Technical Manager Function

Issued: September 8, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.08 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.5 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.56 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.68 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.4 Ω - 0.6 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.0 Ω - 3.6 j Ω
Return Loss	- 28.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.034 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 05, 2013

DASY5 Validation Report for Head TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1097

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.59 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

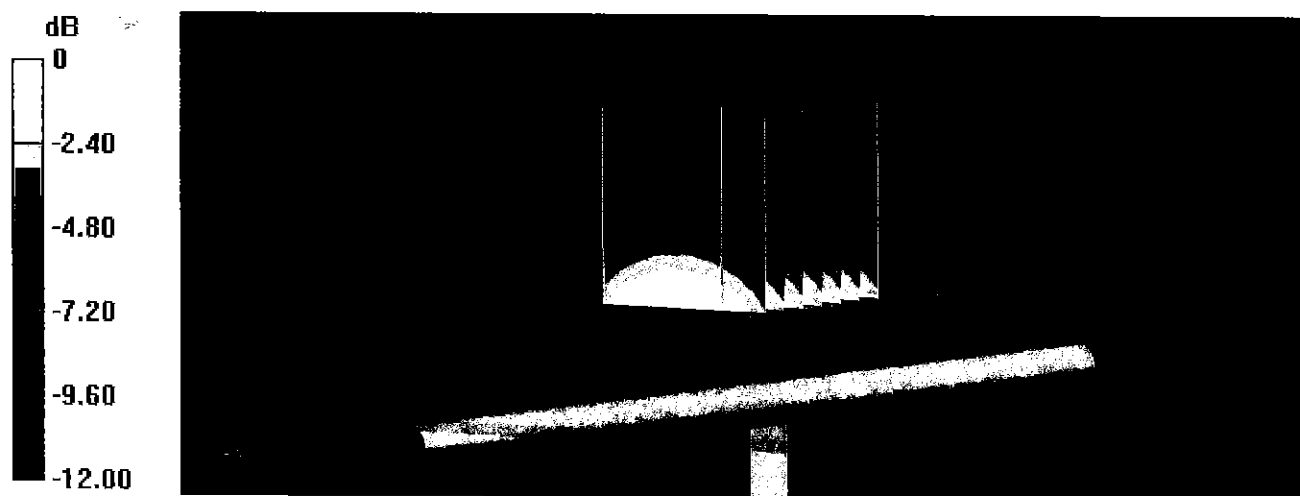

0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

8 Sep 2017 13:09:24
 CH1 S11 1 U FS 1: 54.383 Ω -552.73 m Ω 383.92 pF 750.000 000 MHz

*

De1

CA

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.463 dB 750.000 000 MHz

CA

Avg
16

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1097

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.96 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

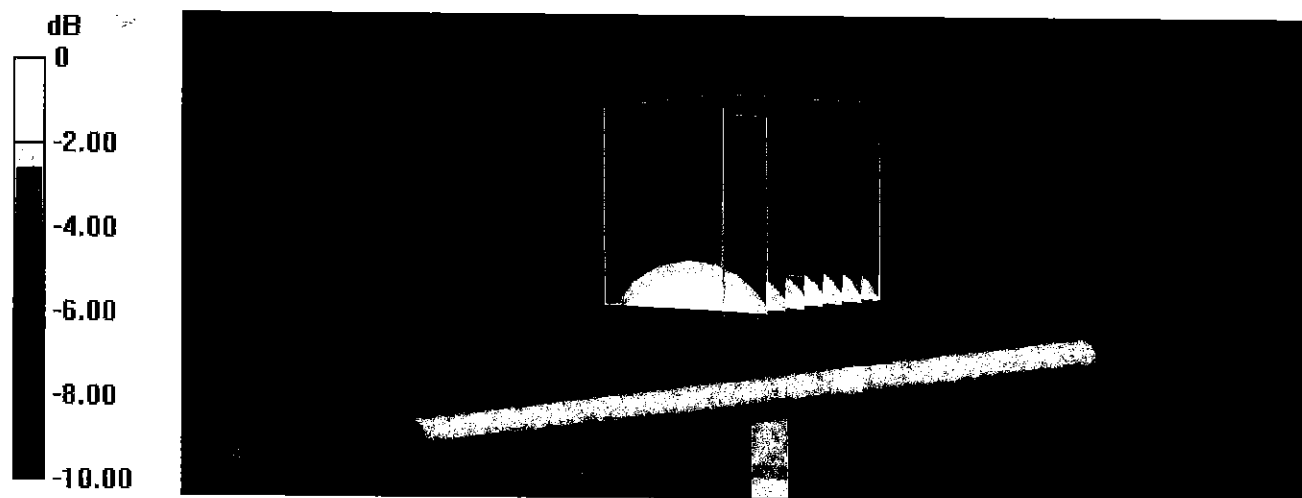

0 dB = 2.81 W/kg = 4.49 dBW/kg

Impedance Measurement Plot for Body TSL

8 Sep 2017 13:08:43
CH1 S11 1 U FS 1: 49.951 Ω -3.6172 Ω 58.666 pF 750.000 000 MHz

*

De1

CA

Avg
15

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -28.833 dB 750.000 000 MHz

CA

Avg
15

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

Certification of Calibration

Object D750V3 – SN: 1097

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.



Extended Calibration date: September 08, 2018

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/18/2018	Annual	1/18/2019	793

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Team Lead Engineer	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2018	1.034	1.644	1.7	3.41%	1.078	1.12	3.90%	54.4	54.1	0.3	-0.6	-0.6	0	-27.5	-25.5	7.30%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2018	1.034	1.712	1.78	3.97%	1.136	1.17	2.99%	50	49.6	0.4	-3.6	-3.1	0.5	-28.8	-30.3	-5.20%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

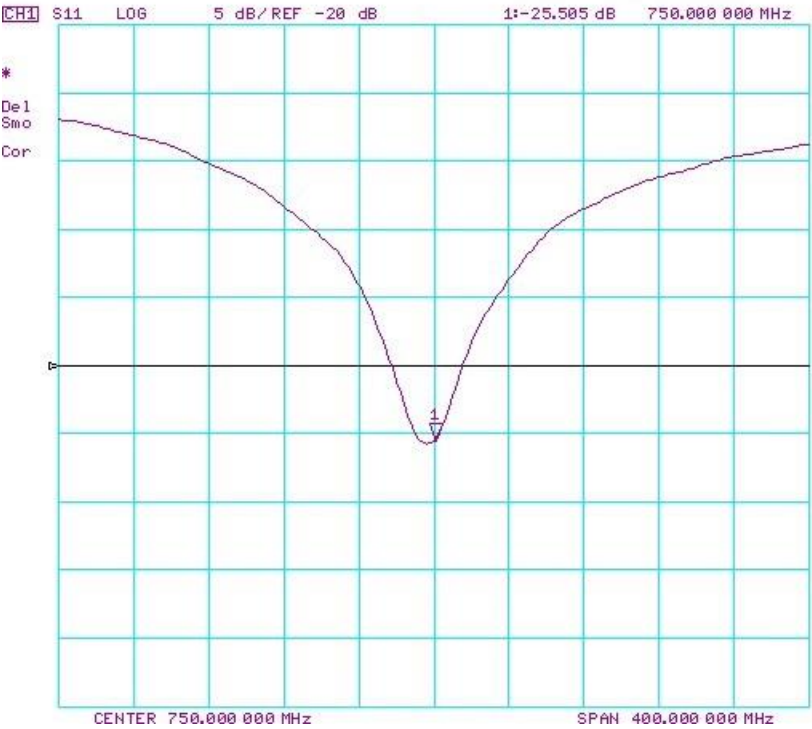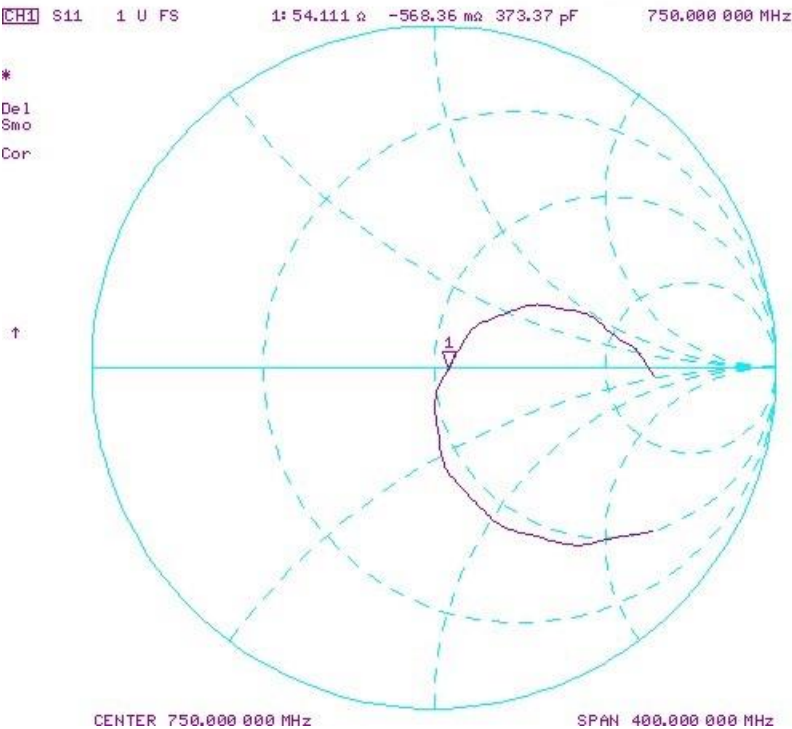

Impedance & Return-Loss Measurement Plot for Body TSL

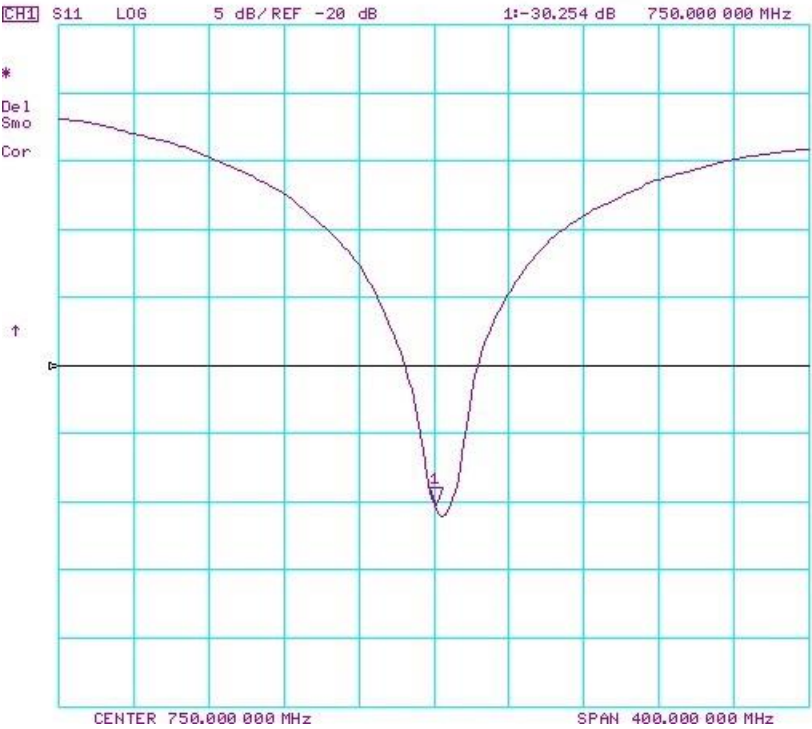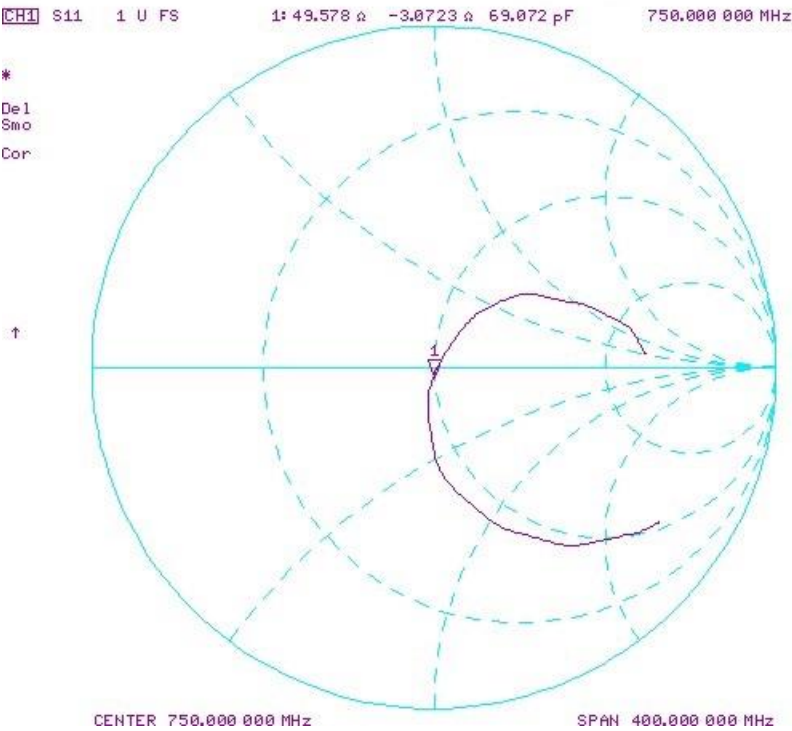



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D850V2-1010_Sep17**

CALIBRATION CERTIFICATE

Object **D850V2 - SN:1010**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **September 08, 2017**

SCV
10/03/2017

SCV
9/9/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** Name **Laboratory Technician** Function

Approved by: **Katja Pakovic** Technical Manager

Signature

Issued: September 8, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	850 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.92 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	0.94 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.93 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.63 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.42 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.99 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.3 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.55 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	10.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.68 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.2 Ω - 3.1 j Ω
Return Loss	- 30.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.6 Ω - 5.8 j Ω
Return Loss	- 23.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.432 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 04, 2012

DASY5 Validation Report for Head TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 850 MHz; Type: D850V2; Serial: D850V2 - SN:1010

Communication System: UID 0 - CW; Frequency: 850 MHz

Medium parameters used: $f = 850 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.93, 9.93, 9.93); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 63.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 2.53 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 3.41 W/kg

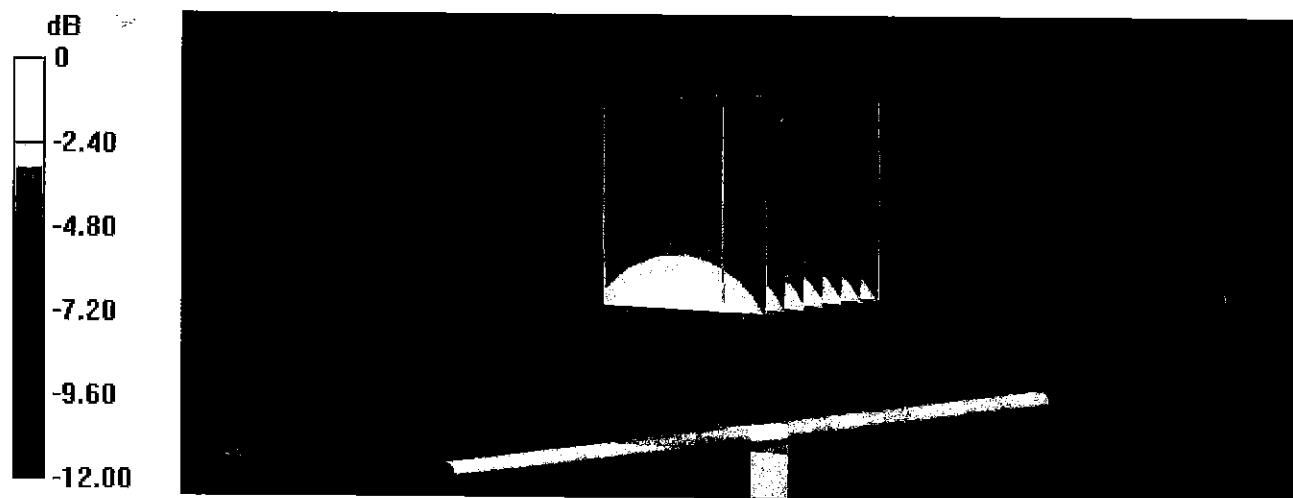

Impedance Measurement Plot for Head TSL

8 Sep 2017 13:24:25
CH1 S11 1 U FS 1:50.227 Ω -3.0996 Ω 60.408 pF 850.000 000 MHz

*

De1

CA

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-30.173 dB 850.000 000 MHz

CA

Avg
16

H1d

START 650.000 000 MHz

STOP 1 050.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 850 MHz; Type: D850V2; Serial: D850V2 - SN:1010

Communication System: UID 0 - CW; Frequency: 850 MHz

Medium parameters used: $f = 850 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 55.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.11, 10.11, 10.11); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 61.09 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.79 W/kg

SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.67 W/kg


Maximum value of SAR (measured) = 3.36 W/kg

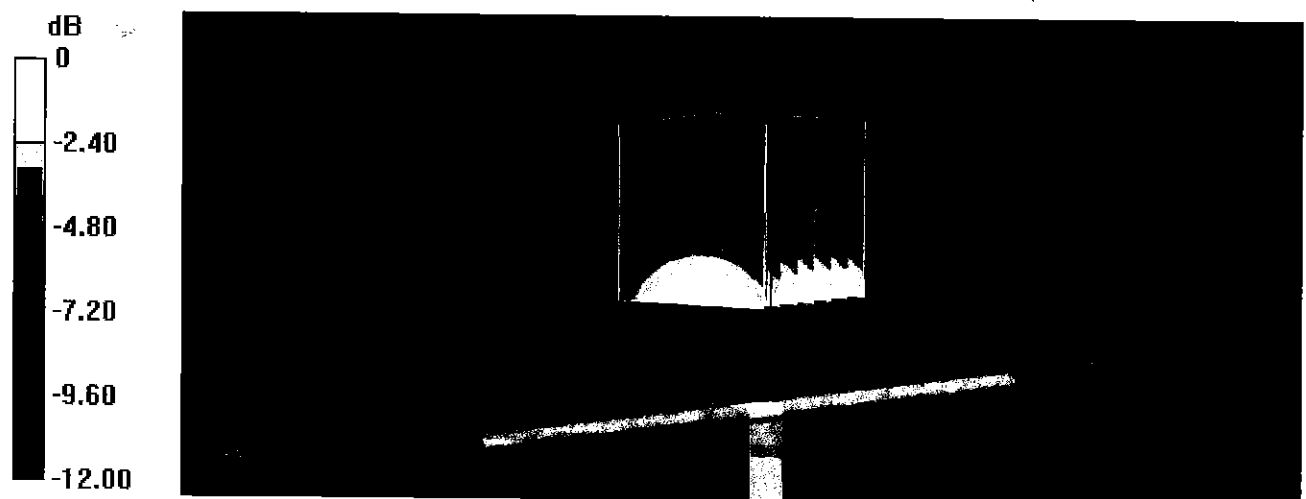

Impedance Measurement Plot for Body TSL


8 Sep 2017 13:23:43
[CH1] S11 1 U FS 1: 46.627 Ω -5.7715 Ω 32.442 pF 850.000 000 MHz

*
Del
CA
Avg
16
H1d

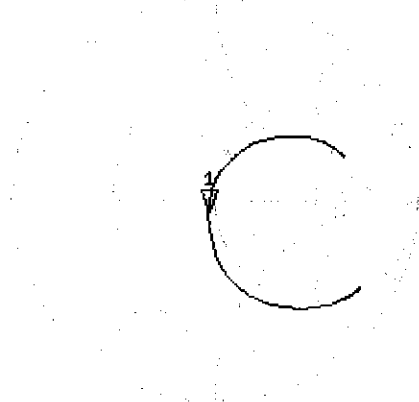

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.213 dB 850.000 000 MHz

CA
Avg
16
H1d

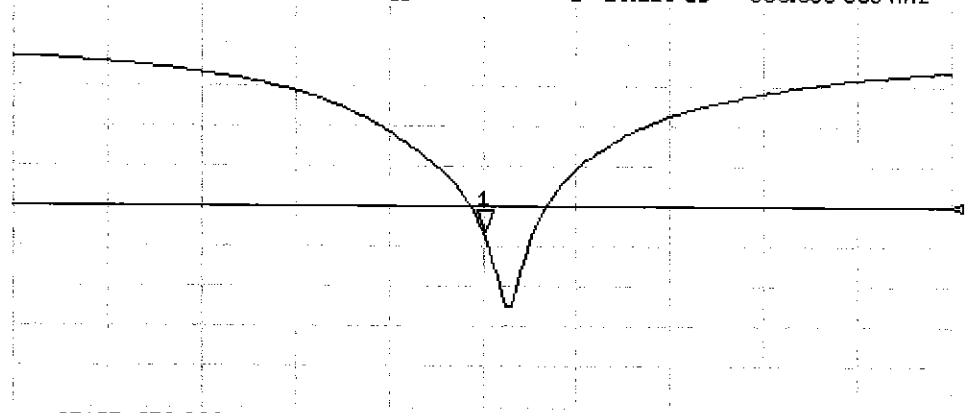

START 650.000 000 MHz STOP 1 850.000 000 MHz

Certification of Calibration

Object D850V2 – SN: 1010

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.



Extended Calibration date: September 08, 2018

Description: SAR Validation Dipole at 850 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Team Lead Engineer	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2018	1.432	1.986	2.01	1.21%	1.284	1.31	2.02%	50.2	48.9	1.3	-3.1	-2.3	0.8	-30.2	-30.1	0.30%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2017	1.432	2.04	2.01	-1.47%	1.336	1.32	-1.20%	46.6	46.7	0.1	-5.8	-3.4	2.4	-23.2	-25.8	-11.20%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

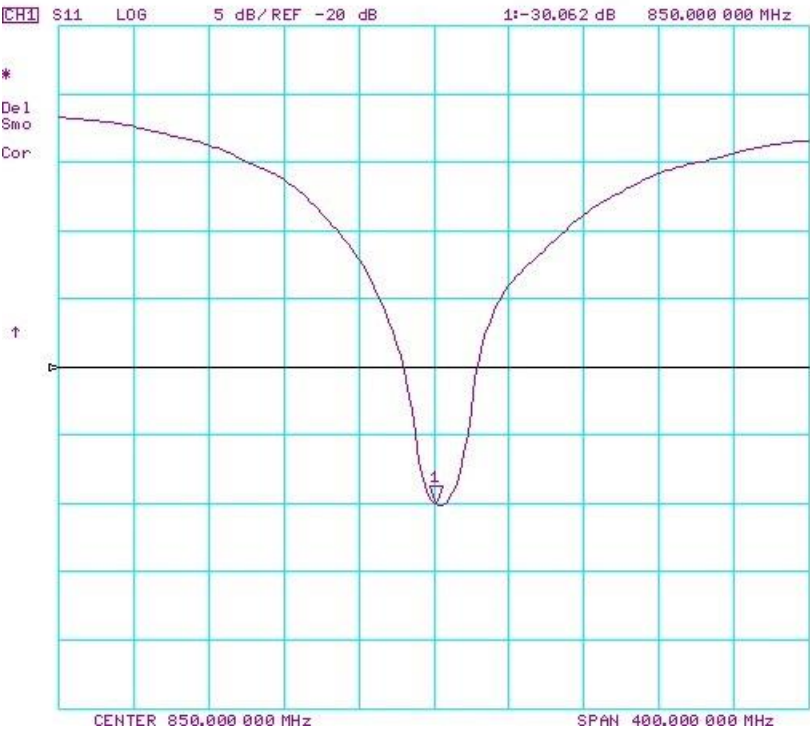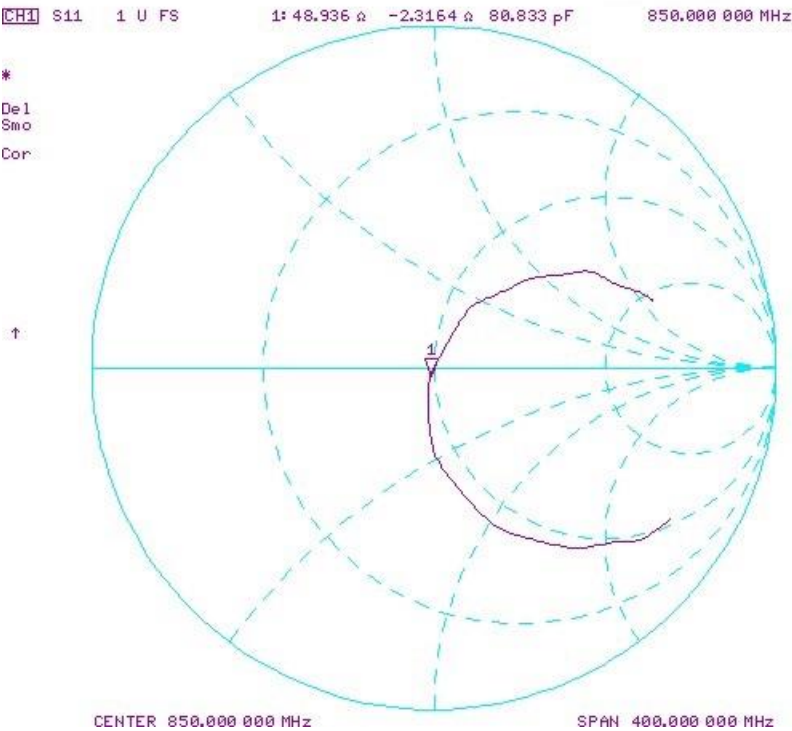

Impedance & Return-Loss Measurement Plot for Body TSL

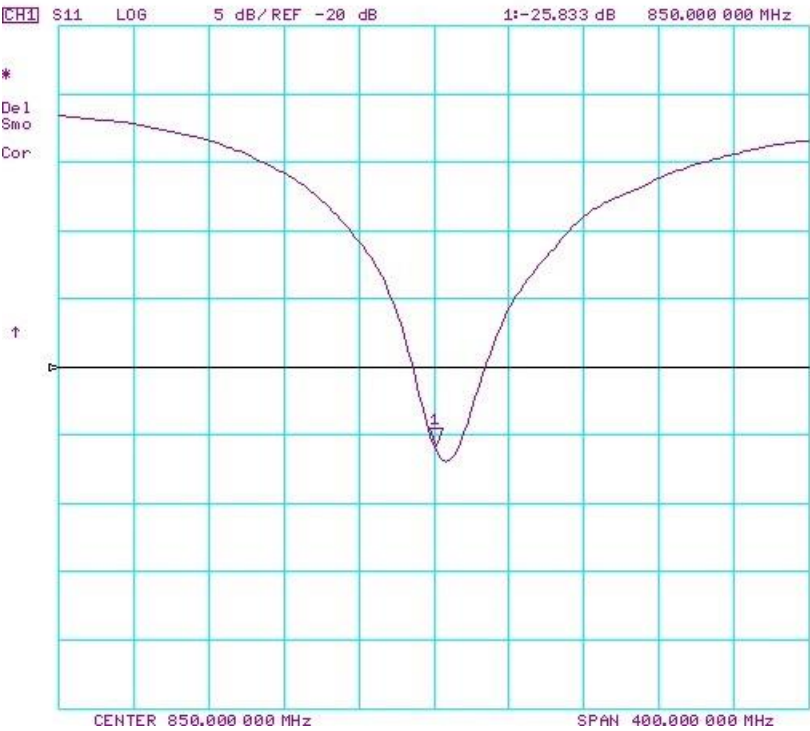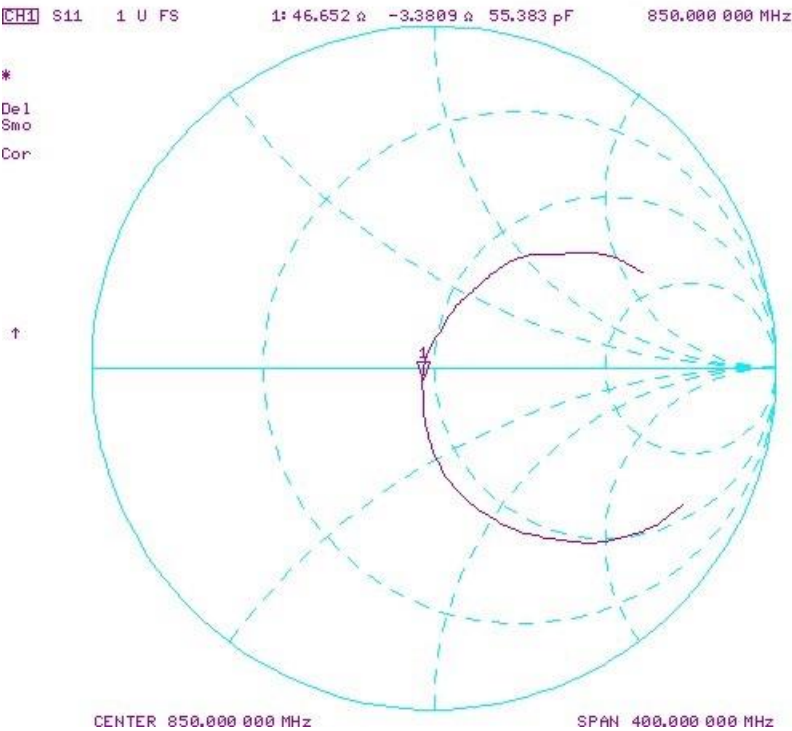



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d180_May18**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d180**

Calibration procedure(s) **QA CAL-05.v10**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 18, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Manu Seitz	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: May 22, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.8 $\pm$ 6 %	0.92 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.60 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.22 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.6 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.59 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.60 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.31 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.7 Ω - 5.1 j Ω
Return Loss	- 25.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.2 Ω - 8.2 j Ω
Return Loss	- 21.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.396 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 24, 2014

DASY5 Validation Report for Head TSL

Date: 17.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d180

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9) @ 835 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 65.39 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.78 W/kg


SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.32 W/kg

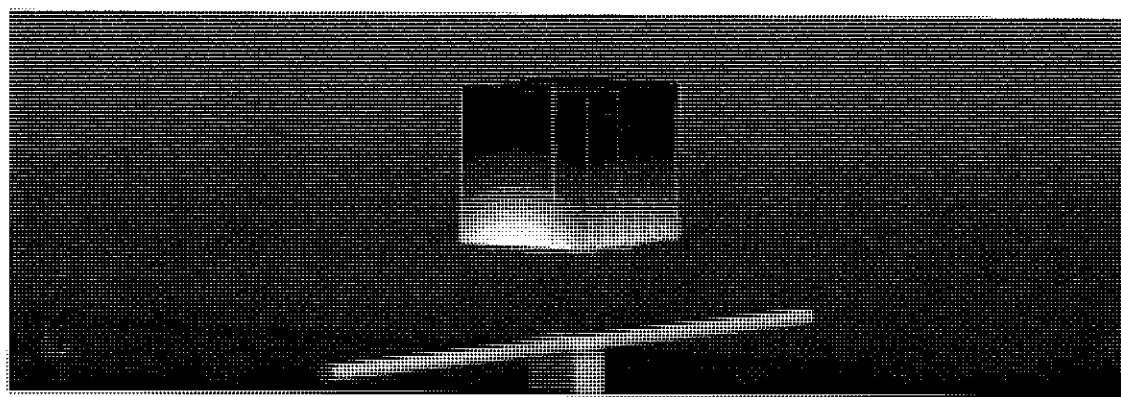

0 dB = 3.32 W/kg = 5.21 dBW/kg

Impedance Measurement Plot for Head TSL

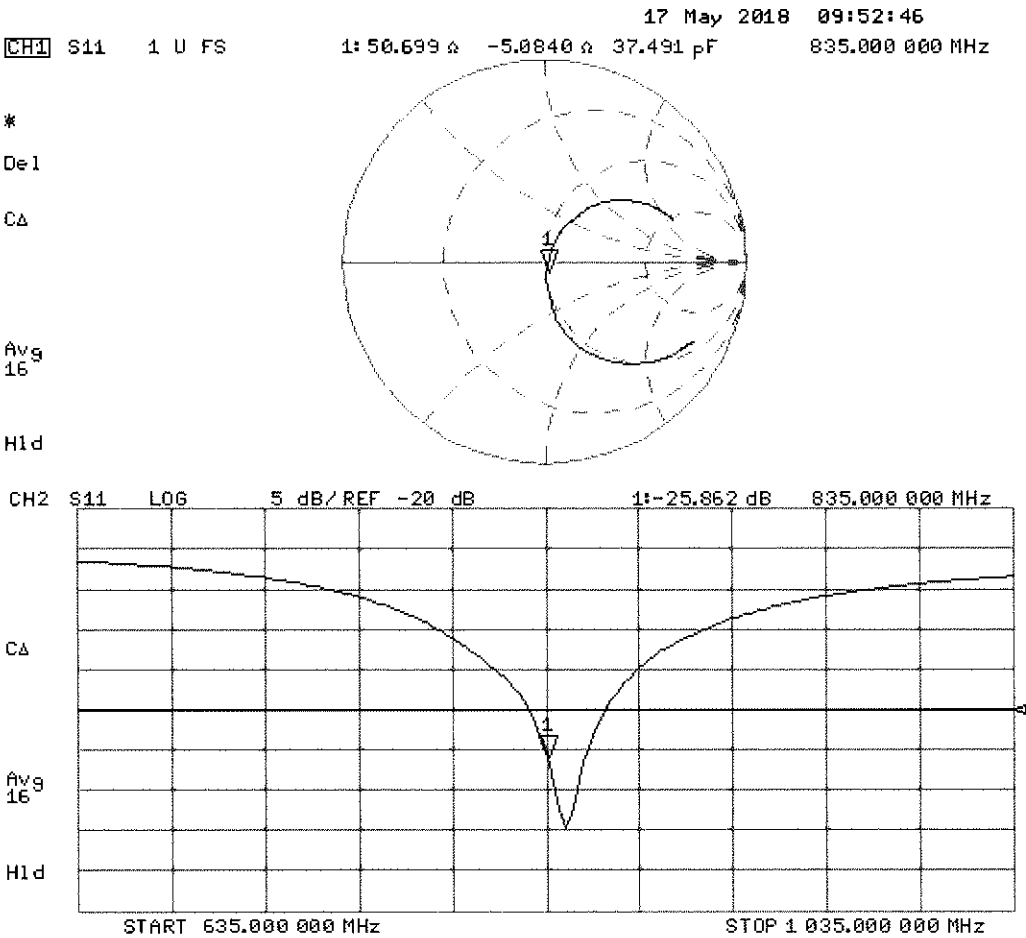

DASY5 Validation Report for Body TSL

Date: 18.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d180

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.80 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 3.23 W/kg

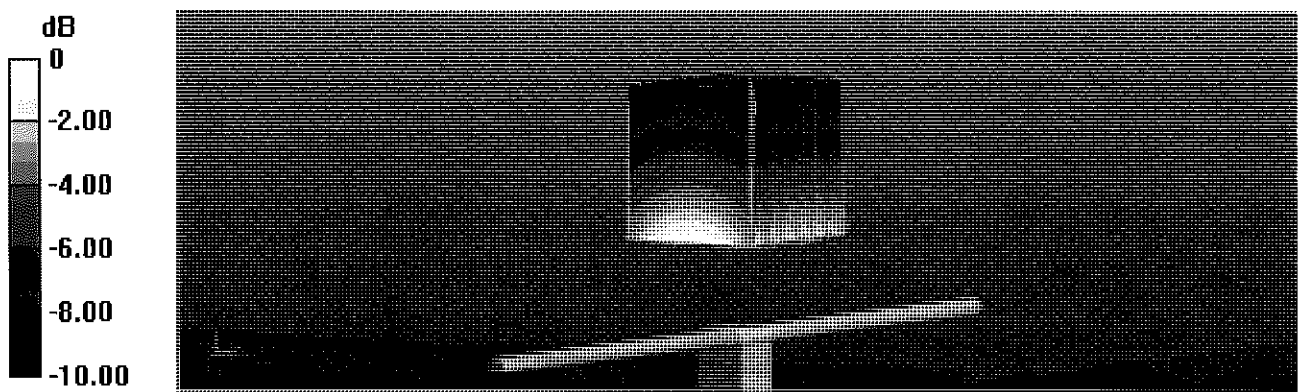


0 dB = 3.23 W/kg = 5.09 dBW/kg


Impedance Measurement Plot for Body TSL

CH1 S11 1 U FS 18 May 2018 10:19:30
1: 47.234 Ω -8.1504 Ω 23.386 pF 835.000 000 MHz

*
Del
Cor

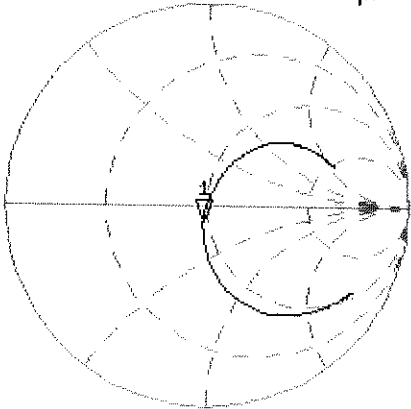

Avg
16
H1d

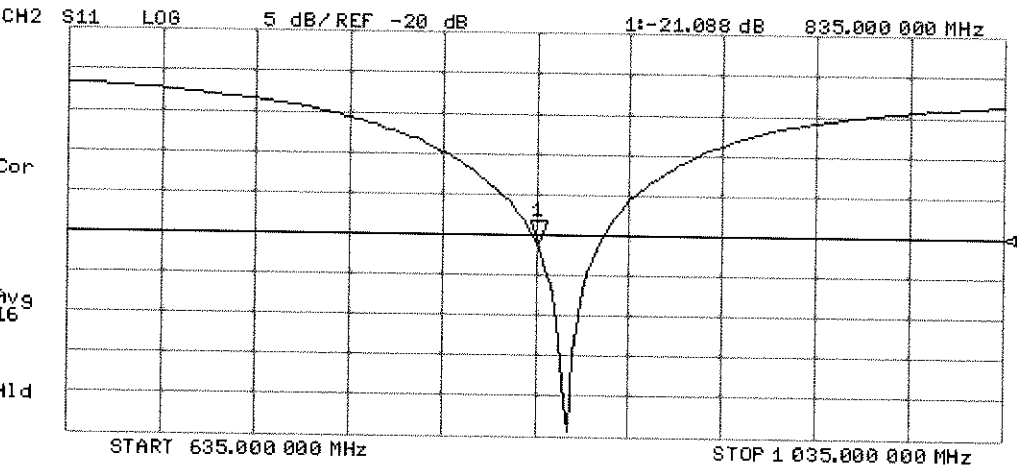

Certification of Calibration

Object D835V2 – SN: 4d180

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: May 16, 2019

Description: SAR Validation Dipole at 835 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	10/2/2018	Annual	10/2/2019	US39170118
Agilent	N5182A	MXG Vector Signal Generator	6/15/2018	Annual	6/15/2019	MY47420837
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	1207470
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339007
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/28/2018	Biennial	2/28/2020	170330160
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/11/2018	Annual	9/11/2019	1045
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/10/2018	Annual	7/10/2019	1402

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Parker Jones	Team Lead Engineer	<i>Parker Jones</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5/18/2018	5/16/2019	1.396	1.92	1.89	3.65%	1.244	1.3	4.50%	50.7	49.8	0.9	-5.1	-6.5	1.4	-25.9	-25.2	2.60%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5/18/2018	5/16/2019	1.396	1.918	2.05	6.88%	1.262	1.34	6.18%	47.2	47.3	0.1	-8.2	-6.3	1.9	-21.1	-23.1	-9.20%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

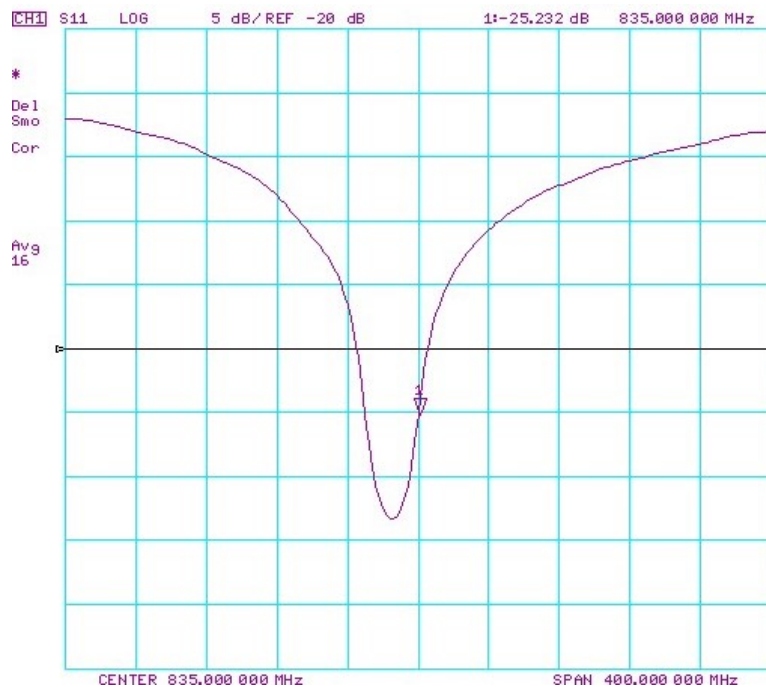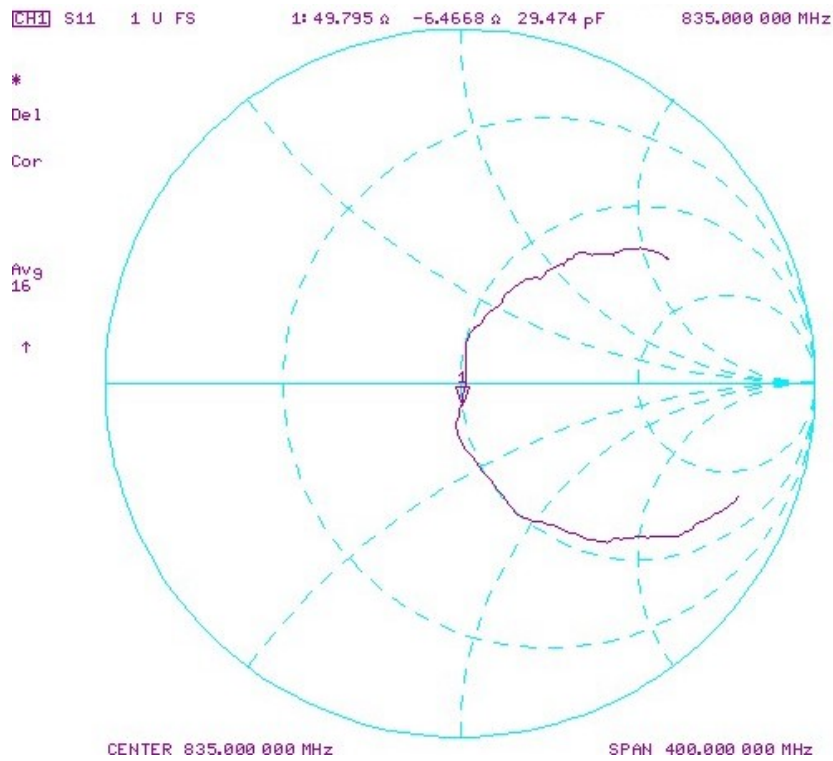

Impedance & Return-Loss Measurement Plot for Body TSL

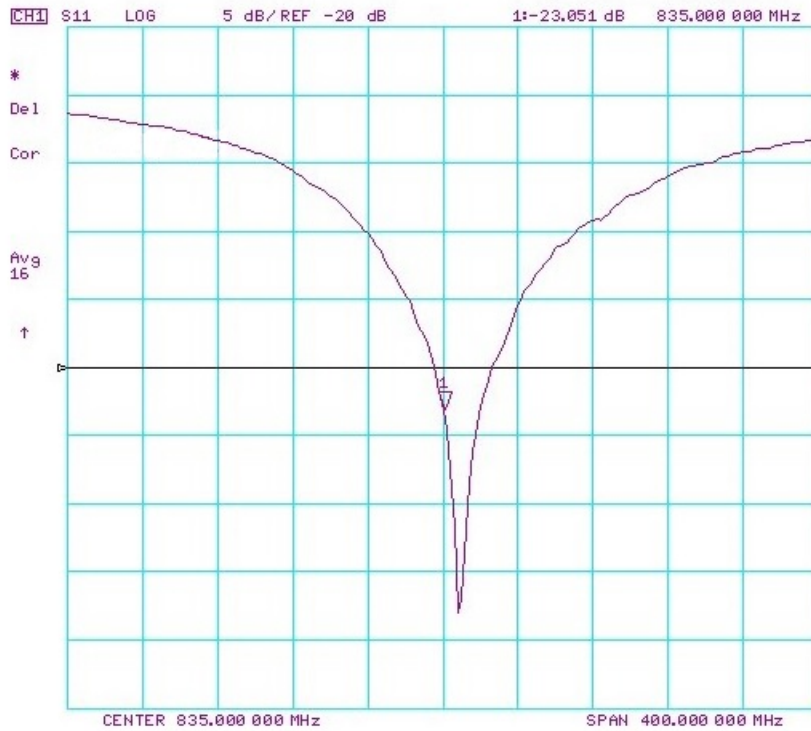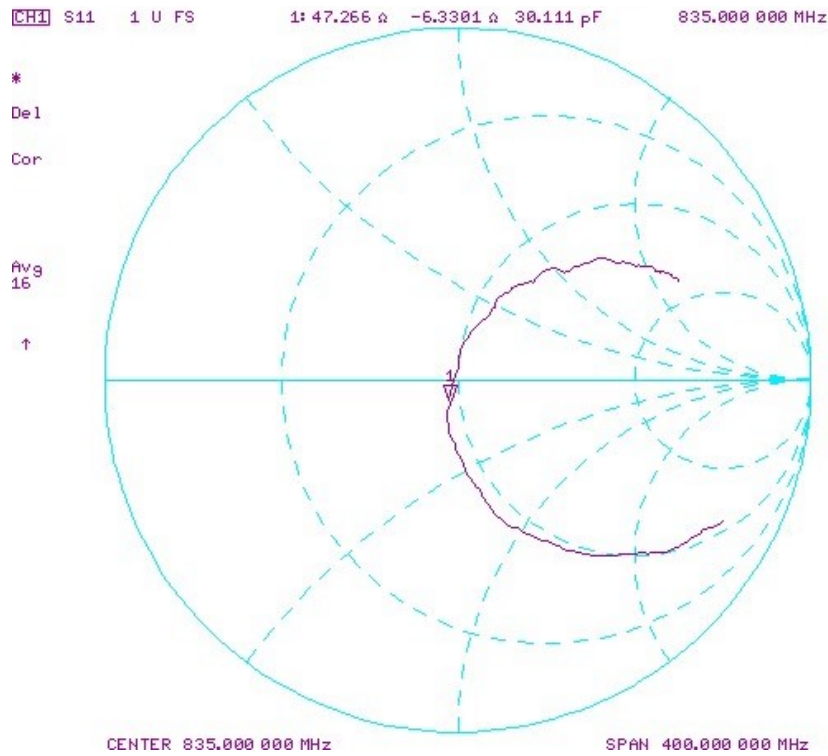



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1092_May18**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1092**

Calibration procedure(s) **QA CAL-05 v10**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 15, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

	Name	Function	Signature
Calibrated by:	Manu Seitz	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 17, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.0 $\pm$ 6 %	1.34 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	8.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.73 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.0 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.2 $\pm$ 6 %	1.46 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	8.99 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	36.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.81 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.4 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.2 Ω - 1.0 j Ω
Return Loss	- 37.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.8 Ω - 0.6 j Ω
Return Loss	- 25.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.217 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 07, 2012

DASY5 Validation Report for Head TSL

Date: 15.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1092

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.5, 8.5, 8.5) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.8 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 8.95 W/kg; SAR(10 g) = 4.73 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

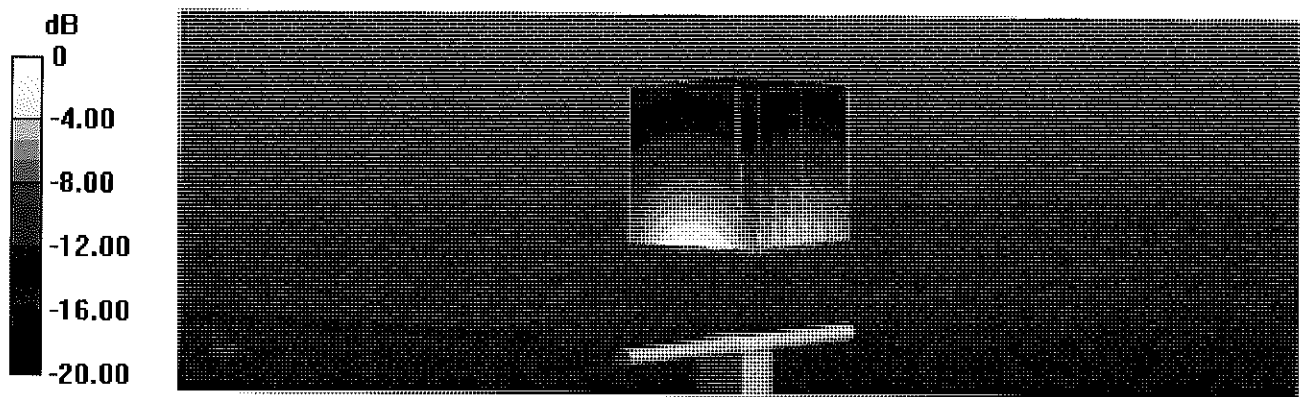


0 dB = 13.8 W/kg = 11.40 dBW/kg

Impedance Measurement Plot for Head TSL

15 May 2018 11:09:26
 [CH1] S11 1 U FS 1: 49.203 Ω -1.0117 Ω 89.892 pF 1 750.000 000 MHz

*
 Del
 CA

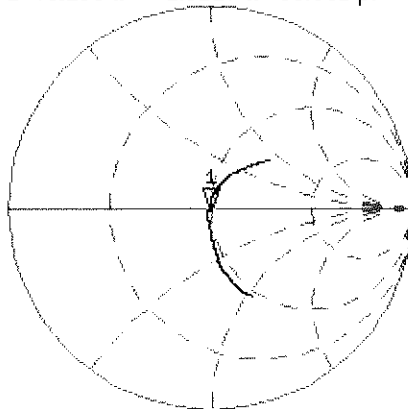

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-37.762 dB 1 750.000 000 MHz

CA

Avg
 16

H1d

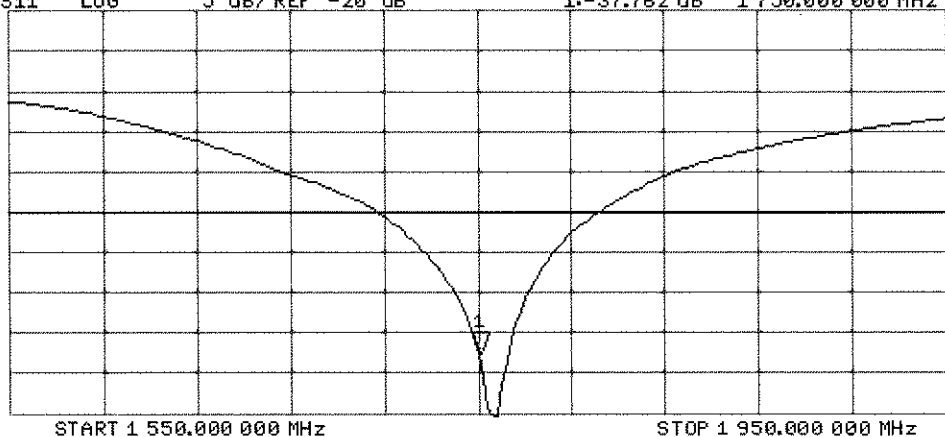

DASY5 Validation Report for Body TSL

Date: 15.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1092

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.35, 8.35, 8.35) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.4 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 15.8 W/kg


SAR(1 g) = 8.99 W/kg; SAR(10 g) = 4.81 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

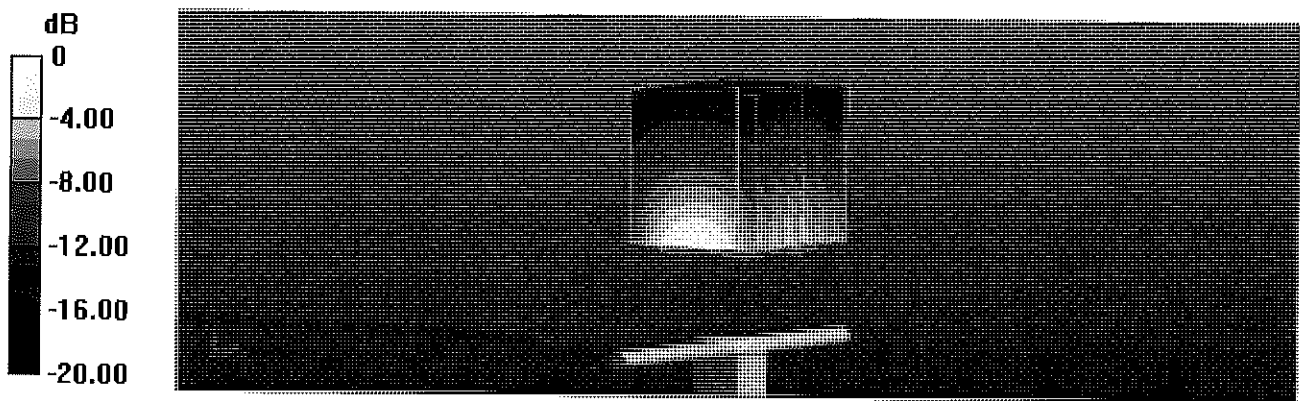

0 dB = 13.4 W/kg = 11.27 dBW/kg

Impedance Measurement Plot for Body TSL

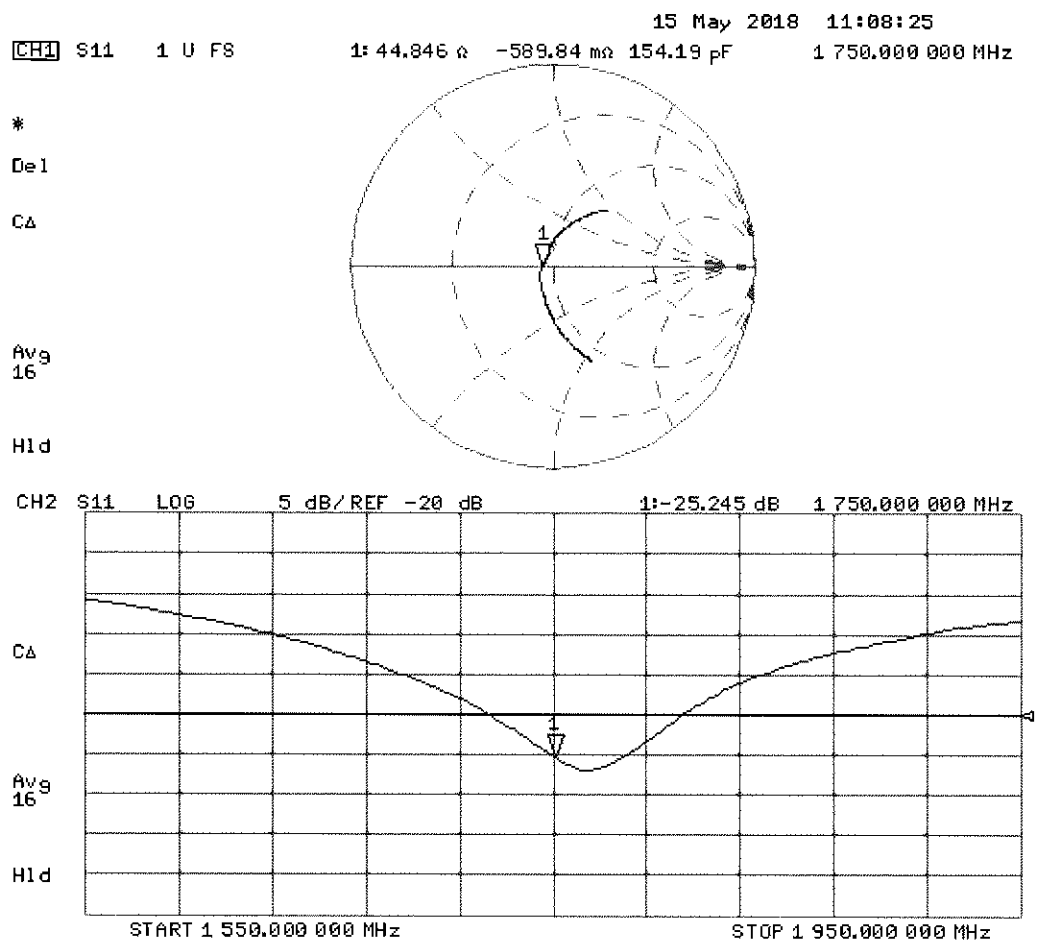

Certification of Calibration

Object D1750V2 – SN: 1092

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: May 15, 2019

Description: SAR Validation Dipole at 1750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	10/2/2018	Annual	10/2/2019	US39170118
Agilent	N5182A	MXG Vector Signal Generator	6/15/2018	Annual	6/15/2019	MY47420837
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	1207470
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339007
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/28/2018	Biennial	2/28/2020	170330160
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/11/2018	Annual	9/11/2019	1045
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/10/2018	Annual	7/10/2019	1402

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Parker Jones	Team Lead Engineer	<i>Parker Jones</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION


Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.


The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5/15/2018	5/15/2019	1.217	3.61	3.59	-0.55%	1.9	1.89	-0.53%	49.2	48.4	0.8	-1	-0.1	0.9	-37.8	-38.2	-1.00%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5/15/2018	5/15/2019	1.217	3.64	3.62	-0.55%	1.94	1.91	-1.59%	44.8	44.2	0.6	-0.6	1.1	1.7	-25.2	-24.2	3.90%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

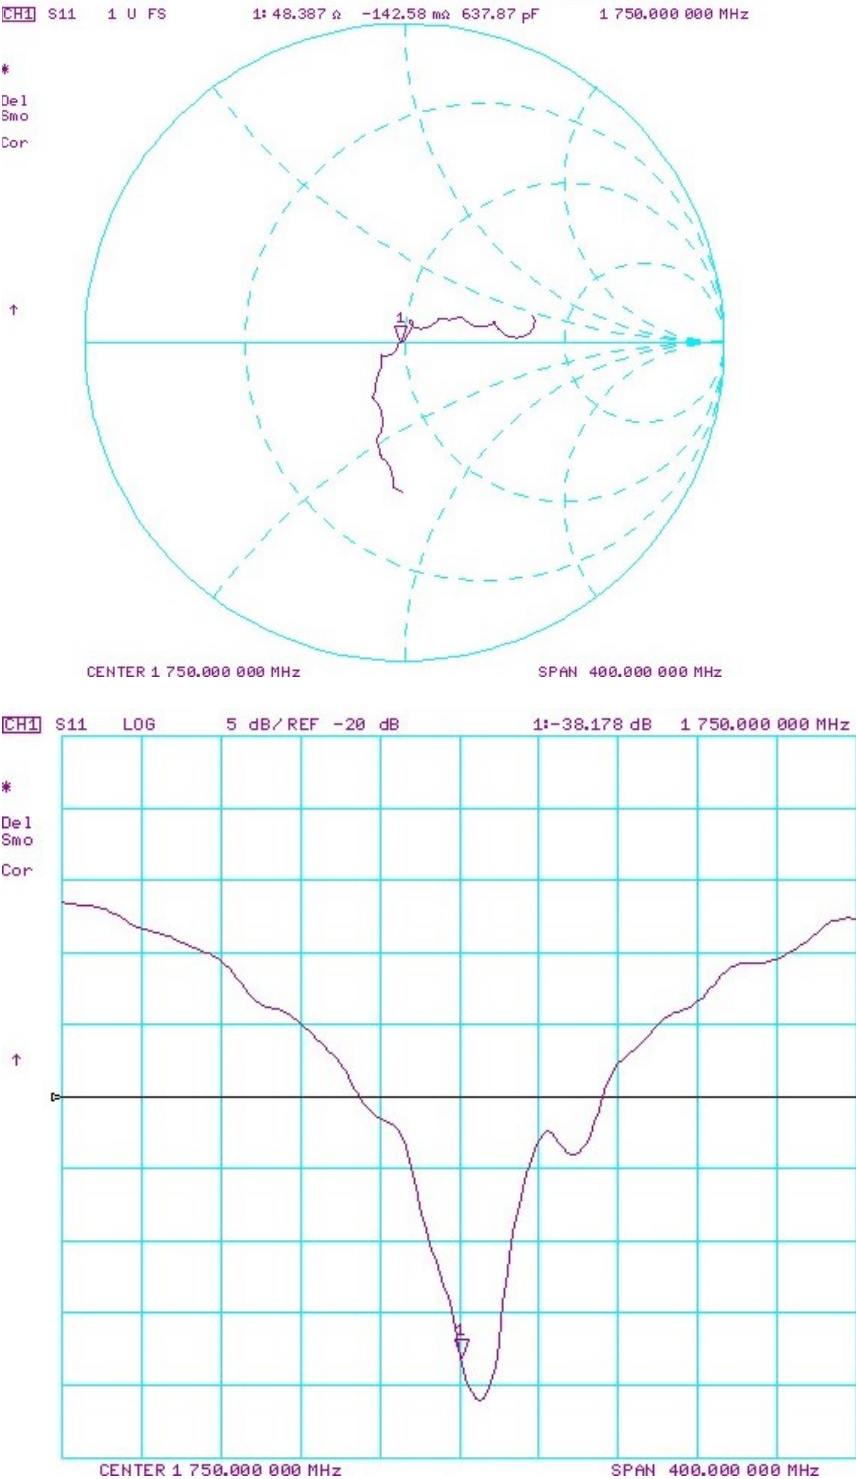

Impedance & Return-Loss Measurement Plot for Body TSL

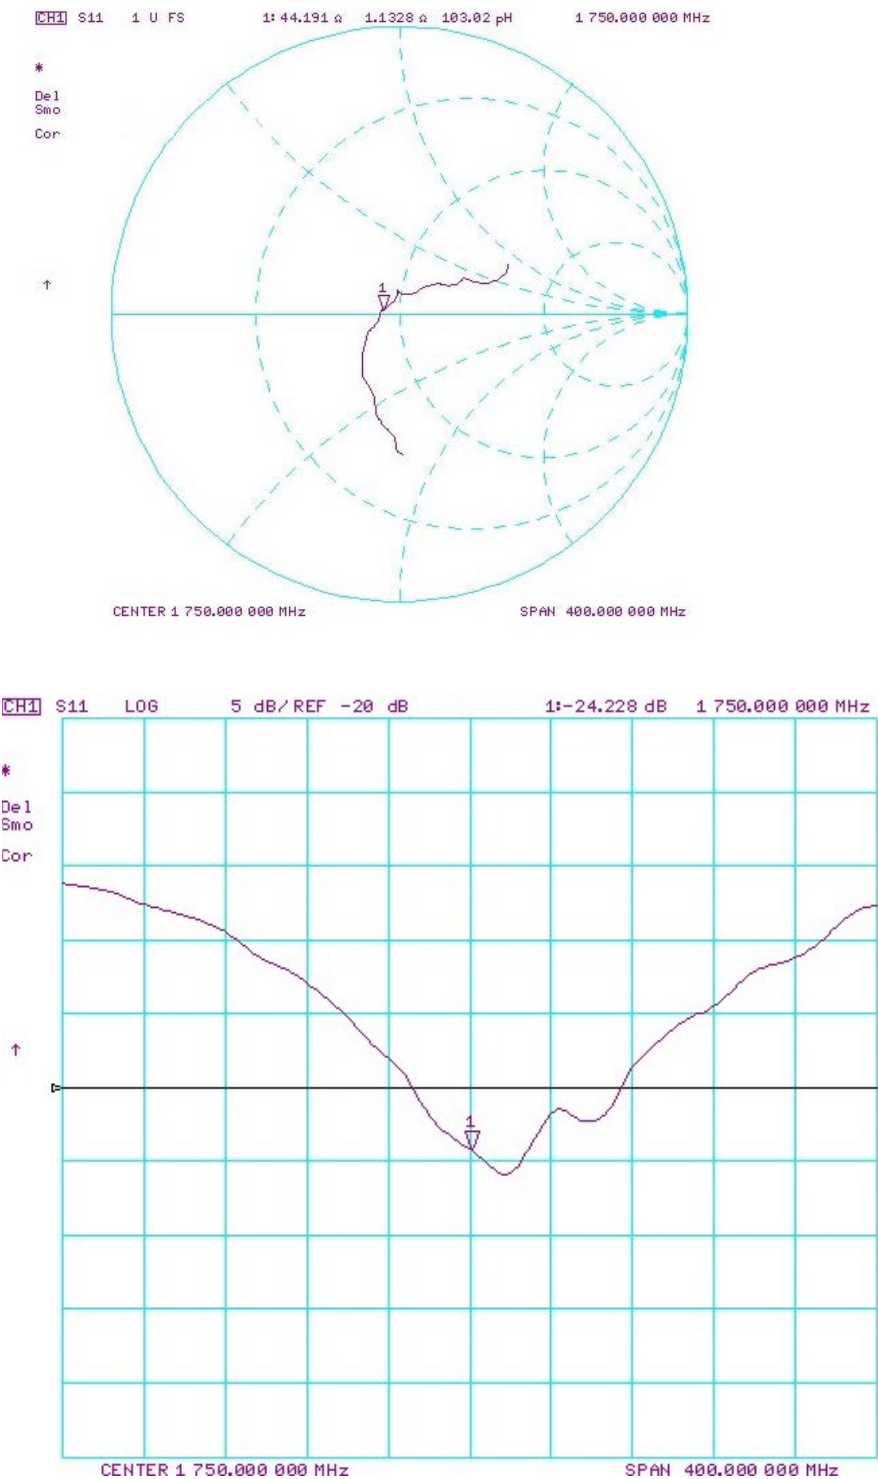



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d026_May18**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d026**

Calibration procedure(s) **QA CAL-05.v10**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 14, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Jeton Kastrati** Name **Laboratory Technician** Function *[Signature]* Signature

Approved by: **Katja Pokovic** Name **Technical Manager** Function *[Signature]* Signature

Issued: May 14, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	1.35 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.19 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.1 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.3 $\pm$ 6 %	1.46 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.65 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.9 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.19 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.0 \Omega + 8.0 j\Omega$
Return Loss	- 21.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.1 \Omega + 7.4 j\Omega$
Return Loss	- 21.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2002

DASY5 Validation Report for Head TSL

Date: 14.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.18, 8.18, 8.18) @ 1900 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.9 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.78 W/kg; SAR(10 g) = 5.19 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

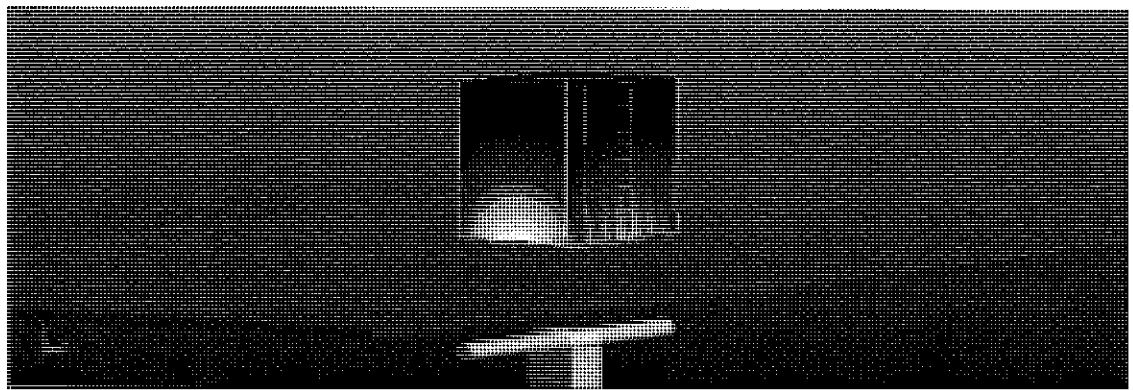

0 dB = 15.0 W/kg = 11.76 dBW/kg


Impedance Measurement Plot for Head TSL

14 May 2018 09:14:41
 [CH1] S11 1 U FS 1: 52.955 Ω 8.0391 Ω 673.40 μ H 1 900.000 000 MHz

*
 Del
 CA

Avg
 16

H1d

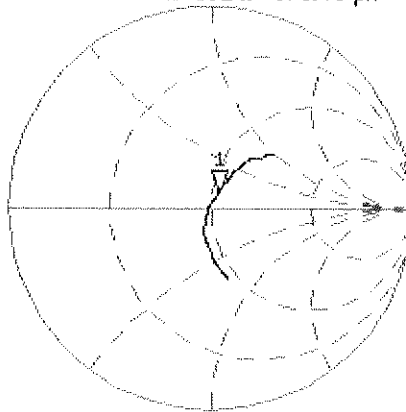


CH2 S11 LOG 5 dB/REF -20 dB 1:-21.619 dB 1 900.000 000 MHz

CA

Avg
 16

H1d

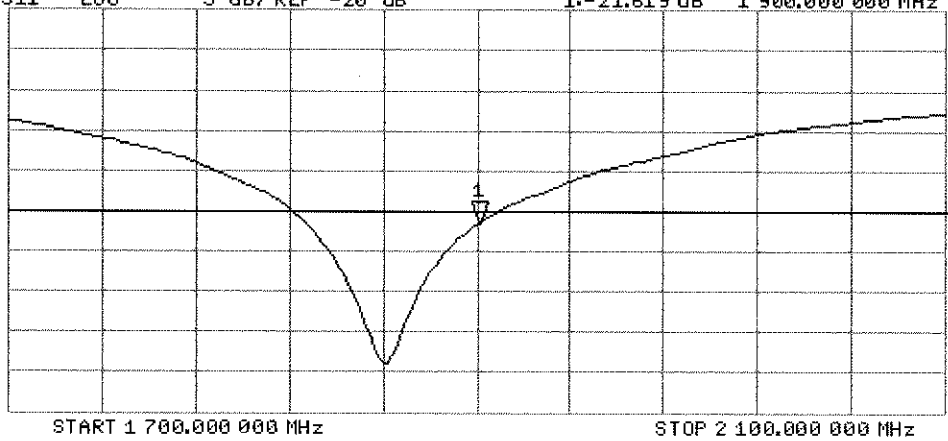

DASY5 Validation Report for Body TSL

Date: 14.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.15, 8.15, 8.15) @ 1900 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.5 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 16.7 W/kg


SAR(1 g) = 9.65 W/kg; SAR(10 g) = 5.19 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

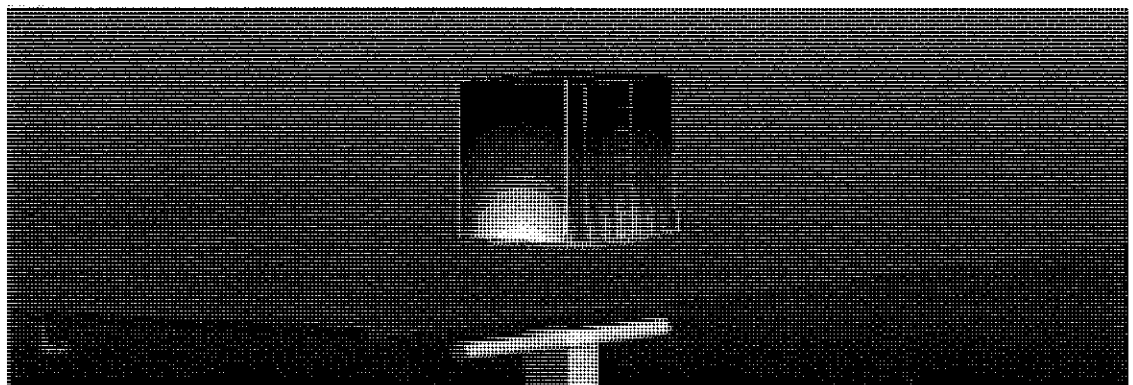

0 dB = 14.4 W/kg = 11.58 dBW/kg

Impedance Measurement Plot for Body TSL

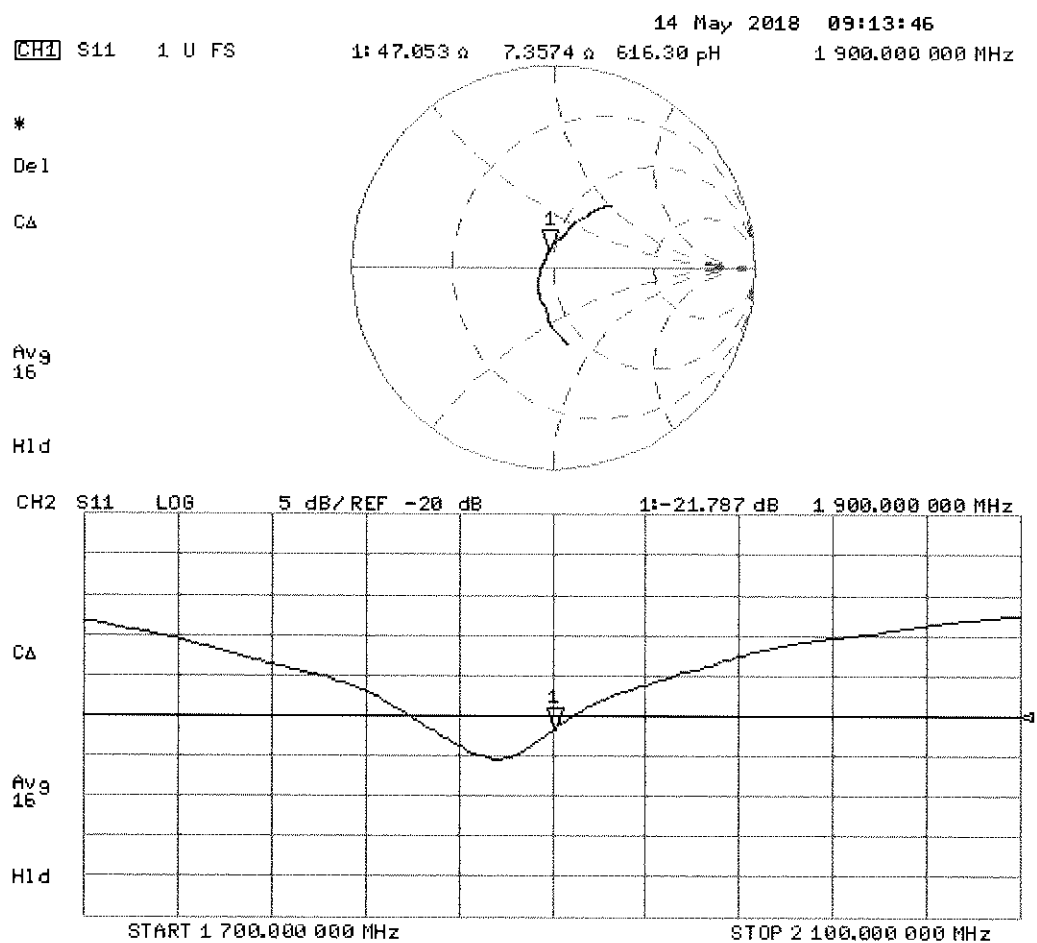

Certification of Calibration

Object D1900V2 – SN: 5d026

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: May 14, 2019

Description: SAR Validation Dipole at 1900 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	10/2/2018	Annual	10/2/2019	US39170118
Agilent	N5182A	MXG Vector Signal Generator	6/15/2018	Annual	6/15/2019	MY47420837
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	1207470
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339007
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/28/2018	Biennial	2/28/2020	170330160
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/11/2018	Annual	9/11/2019	1045
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/10/2018	Annual	7/10/2019	1402

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Parker Jones	Team Lead Engineer	<i>Parker Jones</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5/14/2018	5/14/2019	1.199	4.02	3.98	-1.00%	2.11	2.05	-2.84%	53	54.2	1.2	8	4.1	3.9	-21.6	-25.8	-19.30%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5/14/2018	5/14/2019	1.199	3.99	3.97	-0.50%	2.12	2.04	-3.77%	47.1	46.4	1.3	7.4	3.5	3.9	-21.8	-25.1	-15.10%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

