


Plot 7-60. Lower Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)




Plot 7-61. Extended Lower Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 49 of 88

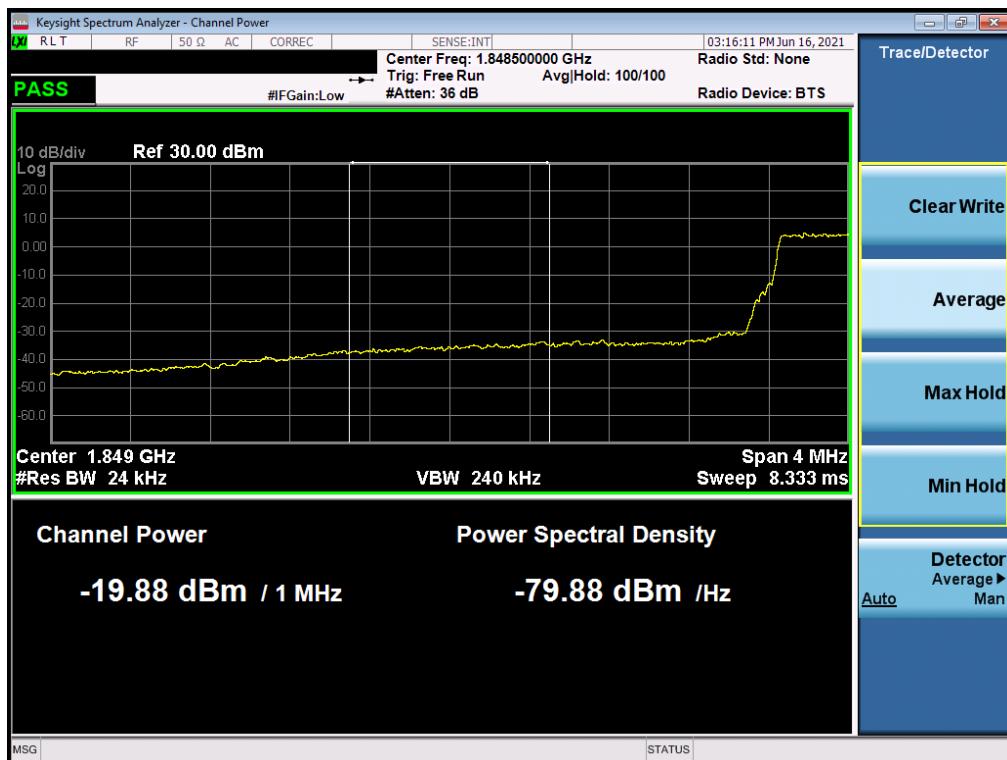


Plot 7-62. Upper Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)

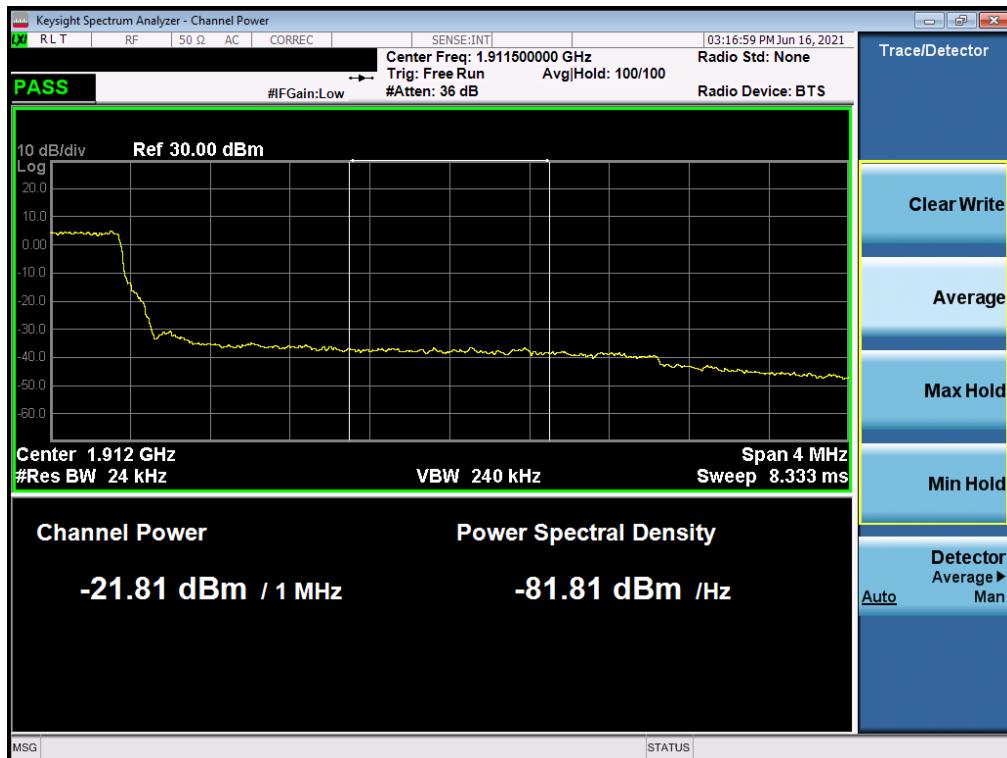


Plot 7-63. Extended Upper Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 50 of 88

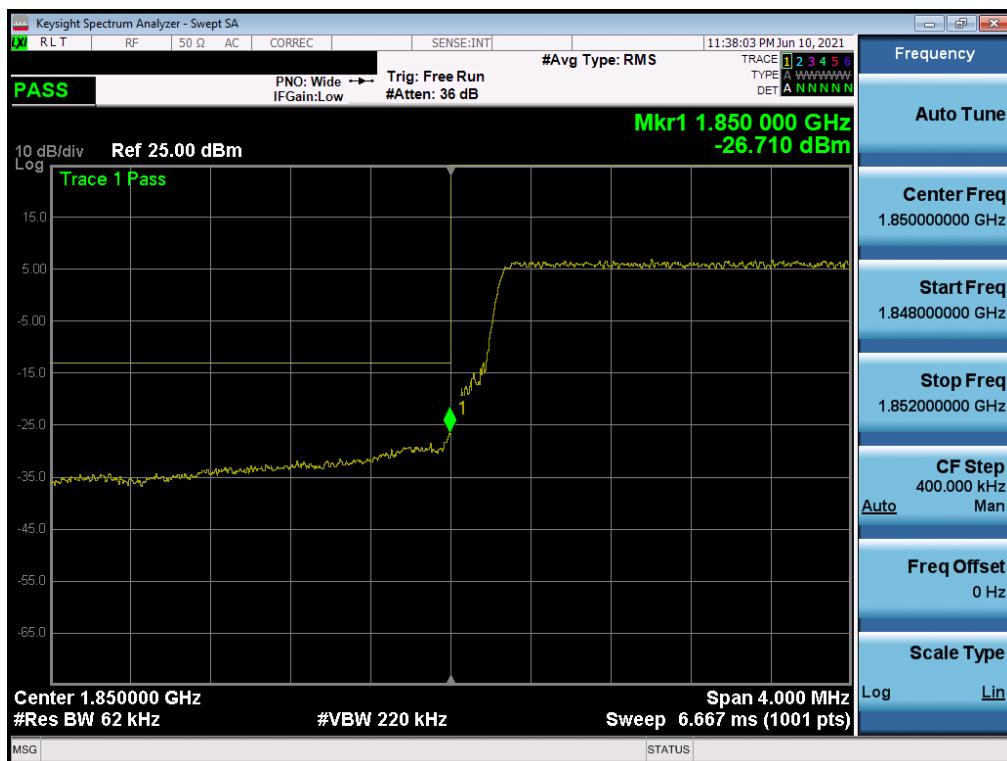

Plot 7-64. Lower Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

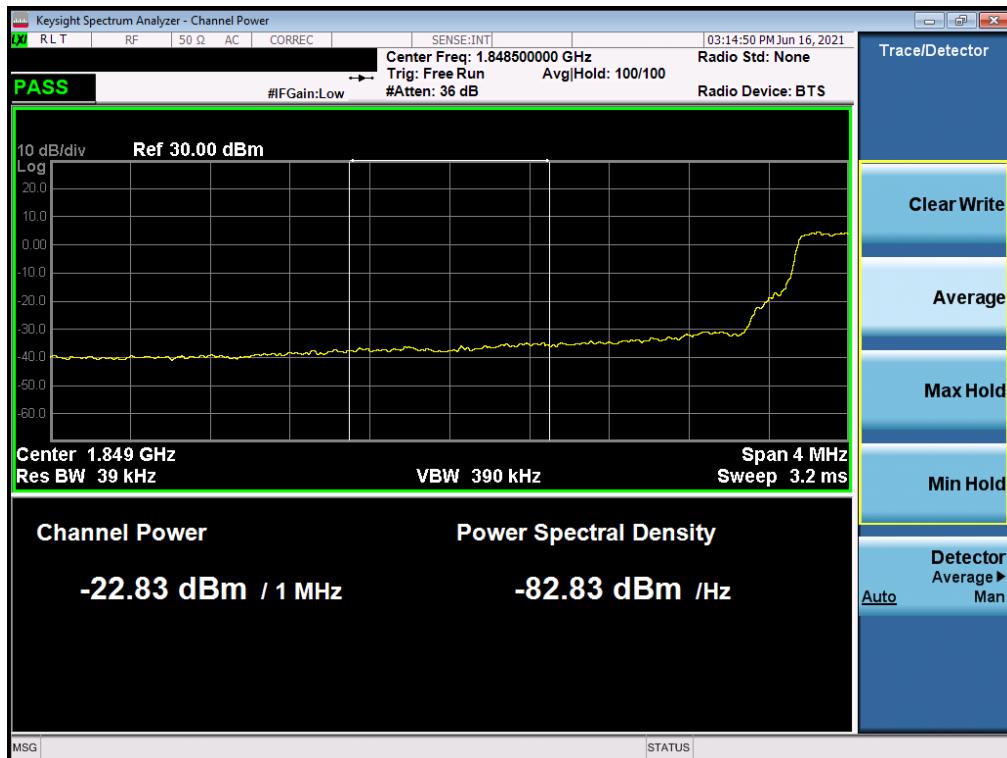

Plot 7-65. Extended Lower Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 51 of 88




Plot 7-66. Upper Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)




Plot 7-67. Extended Upper Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 52 of 88

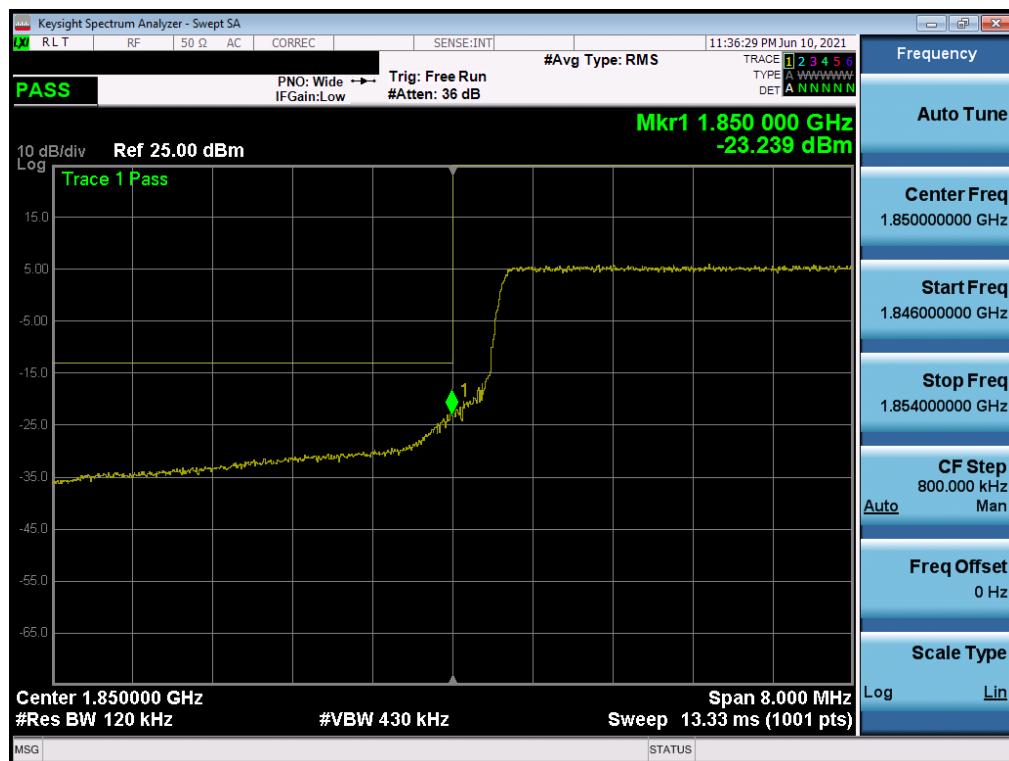

Plot 7-68. Lower Band Edge Plot (LTE Band 2 – 10MHz QPSK – Full RB Configuration)

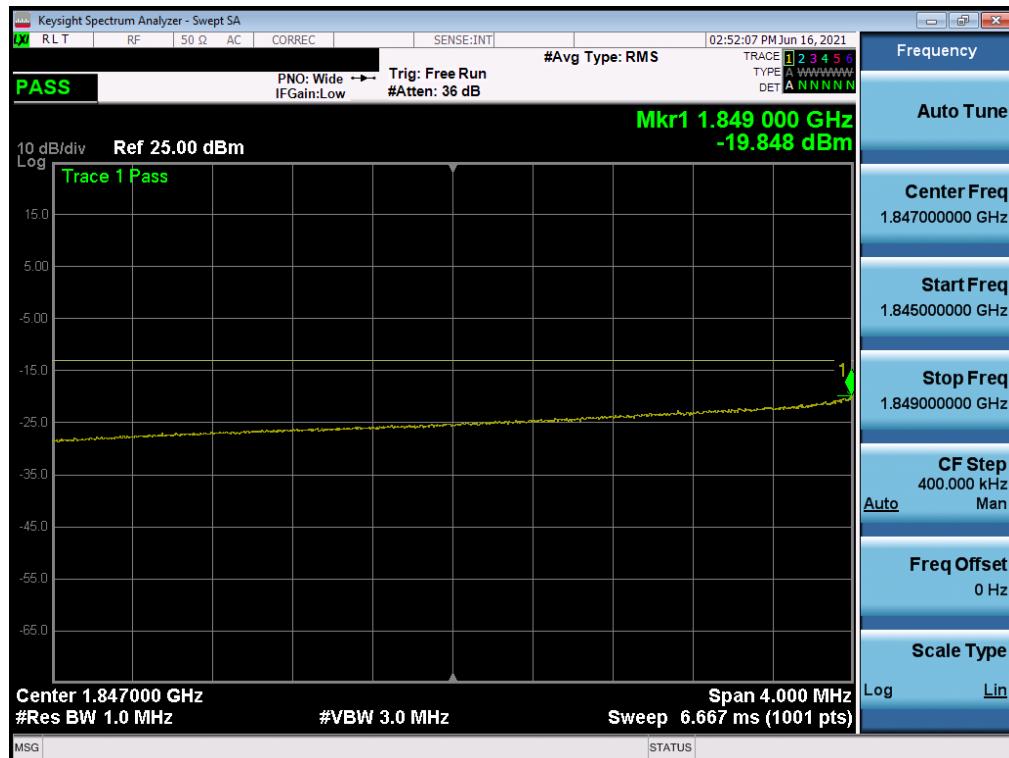

Plot 7-69. Extended Lower Band Edge Plot (LTE Band 2 – 10MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 53 of 88




Plot 7-70. Upper Band Edge Plot (LTE Band 2 – 10MHz QPSK – Full RB Configuration)



Plot 7-71. Extended Upper Band Edge Plot (LTE Band 2 – 10MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 54 of 88

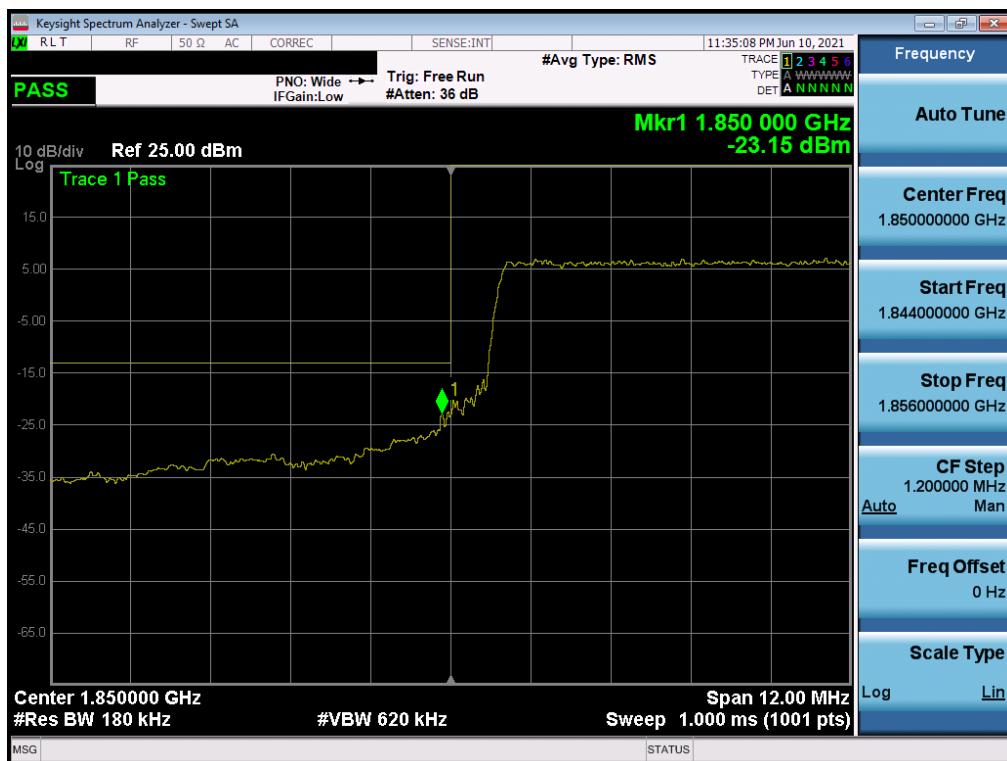

Plot 7-72. Lower Band Edge Plot (LTE Band 2 – 15MHz QPSK – Full RB Configuration)




Plot 7-73. Extended Lower Band Edge Plot (LTE Band 2 – 15MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 55 of 88	




Plot 7-74. Upper Band Edge Plot (LTE Band 2 – 15MHz QPSK – Full RB Configuration)

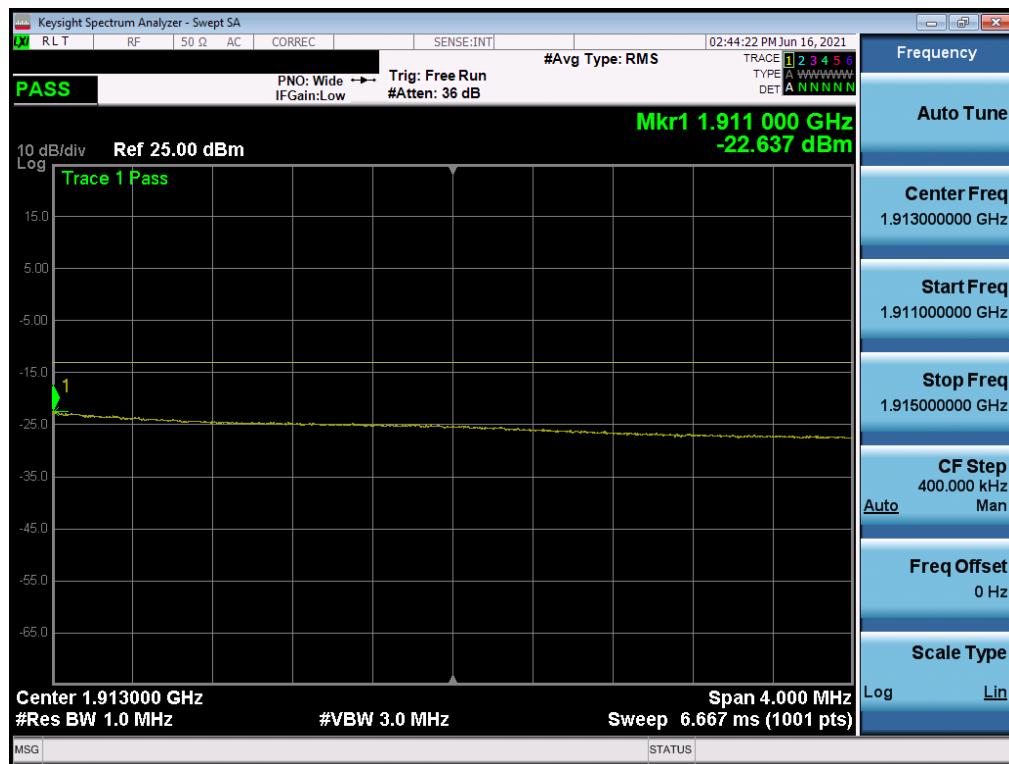

Plot 7-75. Extended Upper Band Edge Plot (LTE Band 2 – 15MHz QPSK – Full RB Configuration)


FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 56 of 88	

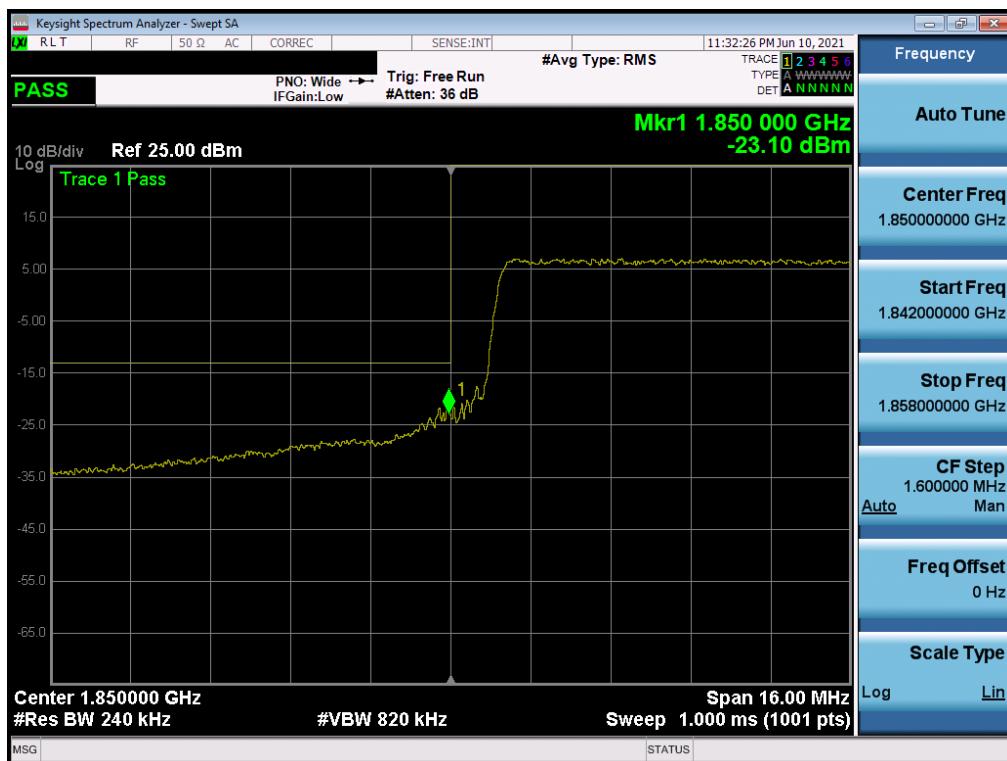

Plot 7-76. Lower Band Edge Plot (LTE Band 2 – 20MHz QPSK – Full RB Configuration)



Plot 7-77. Extended Lower Band Edge Plot (LTE Band 2 – 20MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	 PCTEST Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch			Page 57 of 88



Plot 7-78. Upper Band Edge Plot (LTE Band 2 – 20MHz QPSK – Full RB Configuration)




Plot 7-79. Extended Upper Band Edge Plot (LTE Band 2 – 20MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 58 of 88	

WCDMA PCS



Plot 7-80. Lower Band Edge Plot (WCDMA PCS – Ch. 9262)

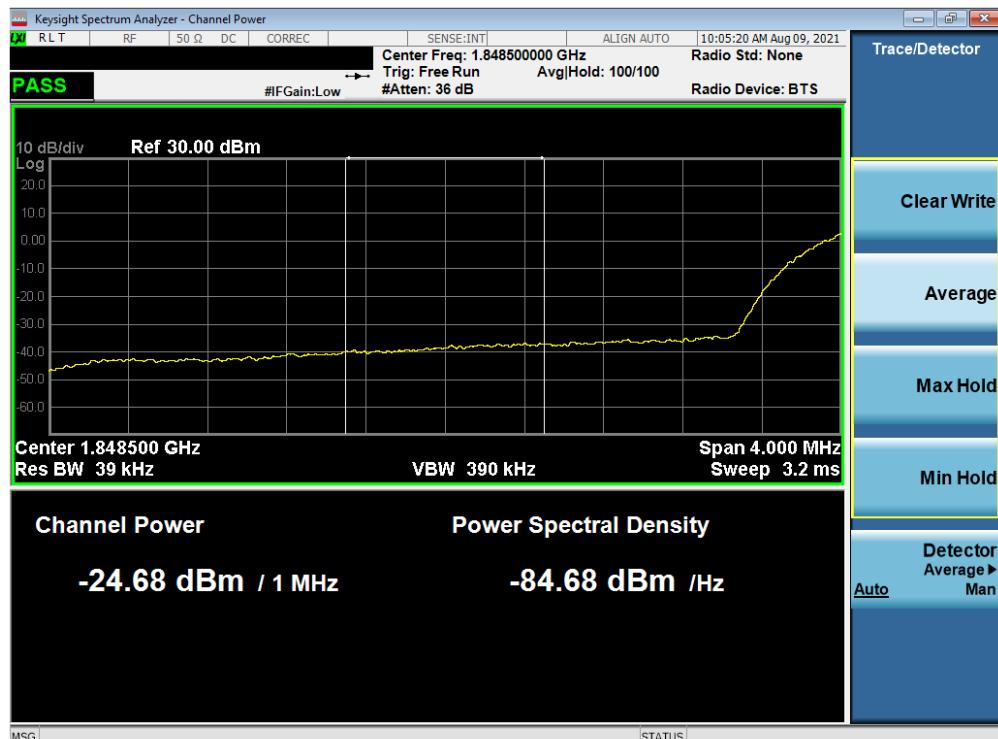


Plot 7-81. Extended Lower Band Edge Plot (WCDMA PCS – Ch. 9262)

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 59 of 88



Plot 7-82. Upper Band Edge Plot (WCDMA PCS – Ch. 9538)

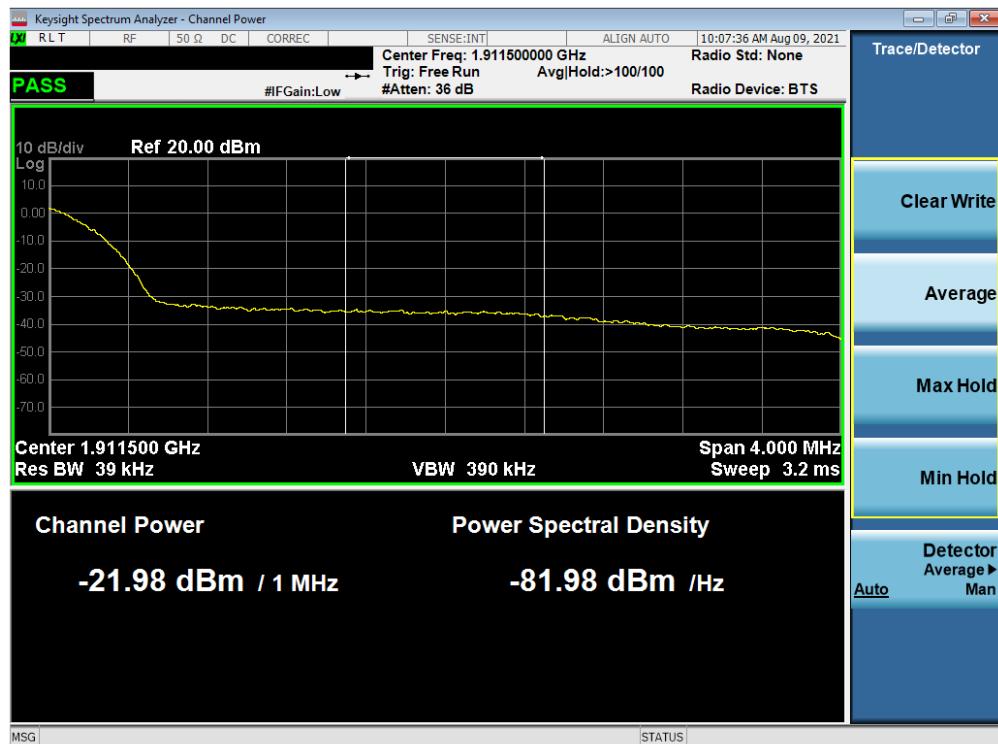

Plot 7-83. Extended Upper Band Edge Plot (WCDMA PCS – Ch. 9538)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 60 of 88

7.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

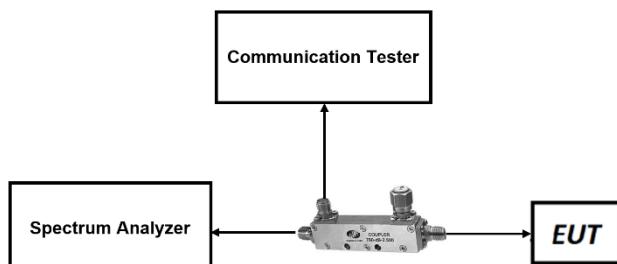



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCG-A2475		 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch			Page 61 of 88

LTE Band 25

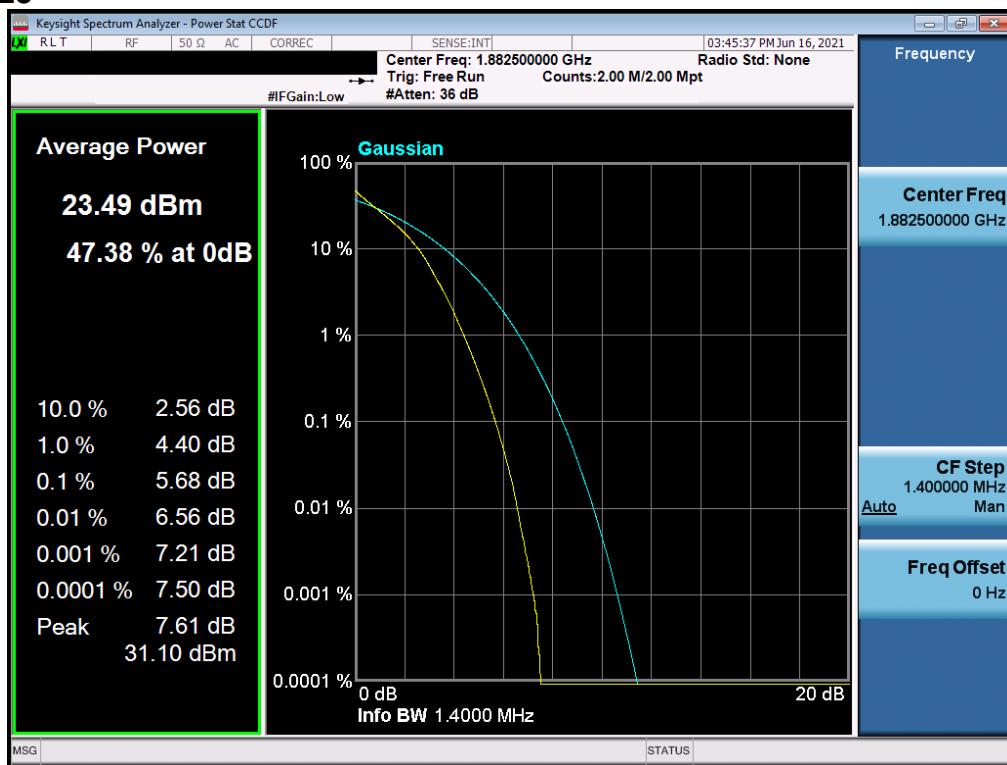


Plot 7-84. PAR Plot (LTE Band 25 - 1.4MHz QPSK - Full RB Configuration)

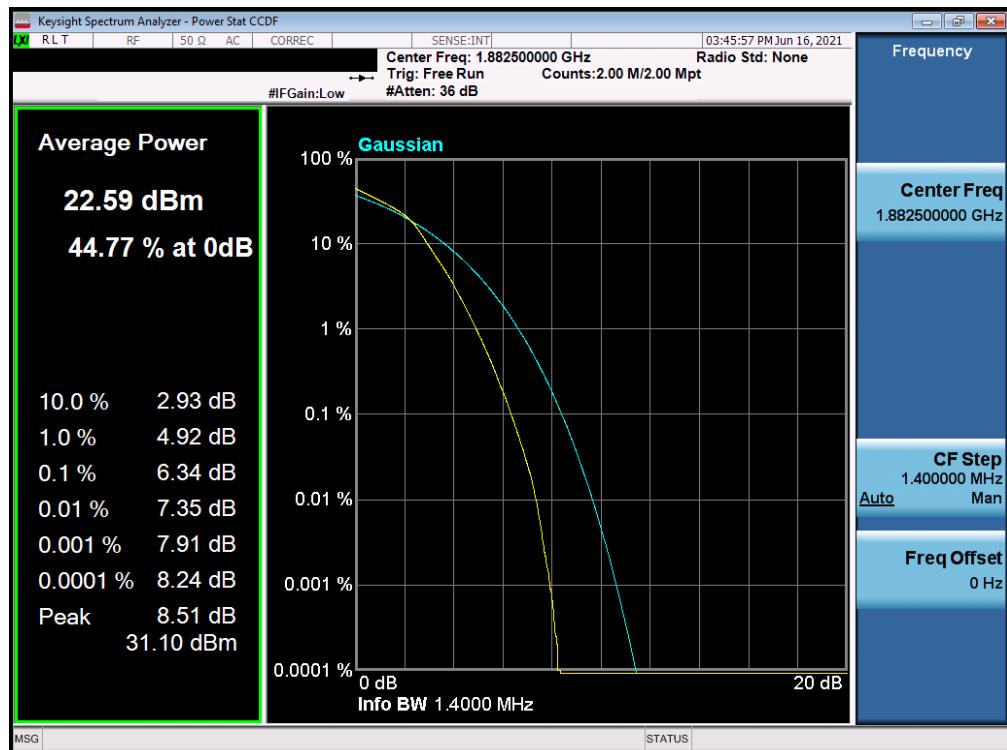


Plot 7-85. PAR Plot (LTE Band 25 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 62 of 88

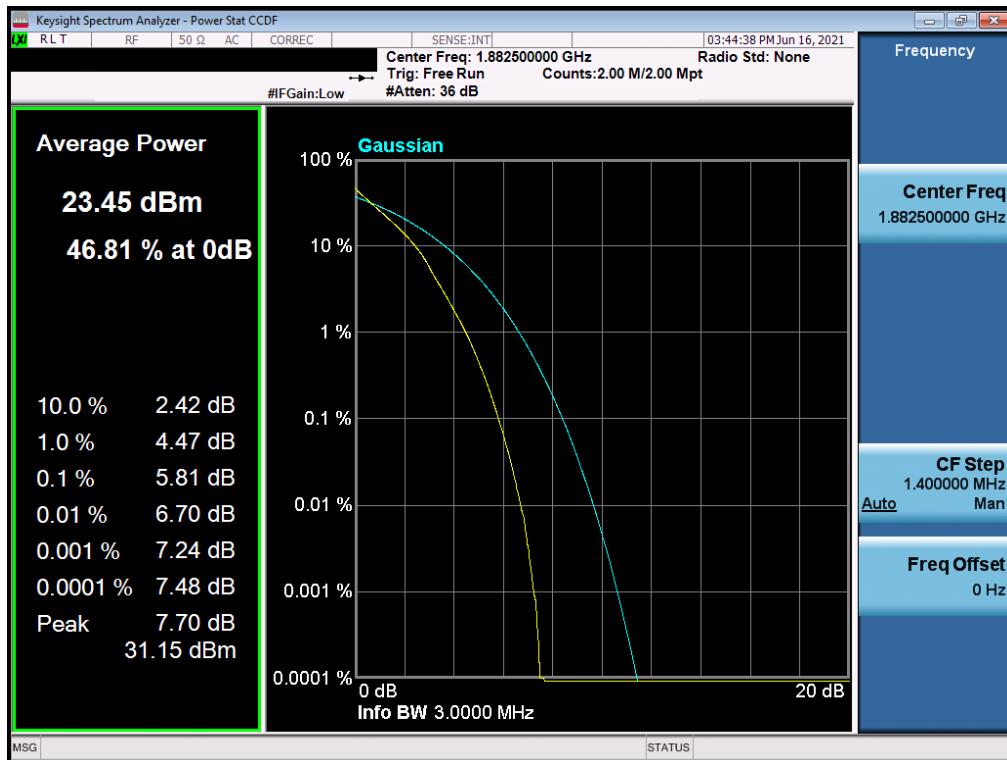


Plot 7-86. PAR Plot (LTE Band 25 - 3MHz QPSK - Full RB Configuration)

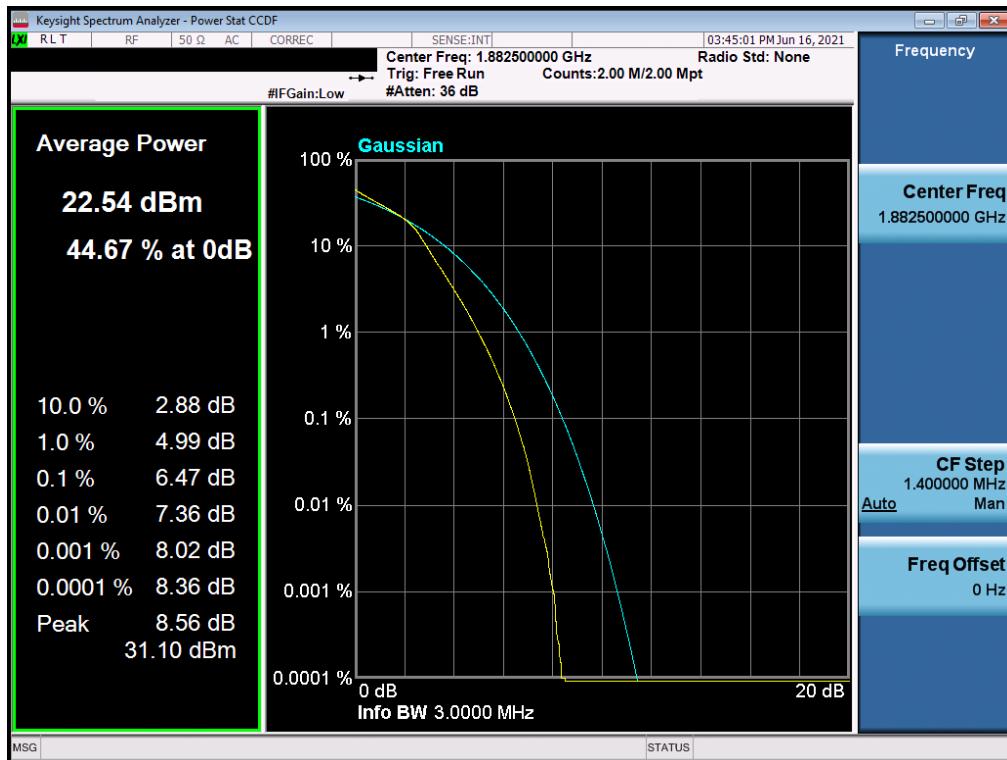


Plot 7-87. PAR Plot (LTE Band 25 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 63 of 88

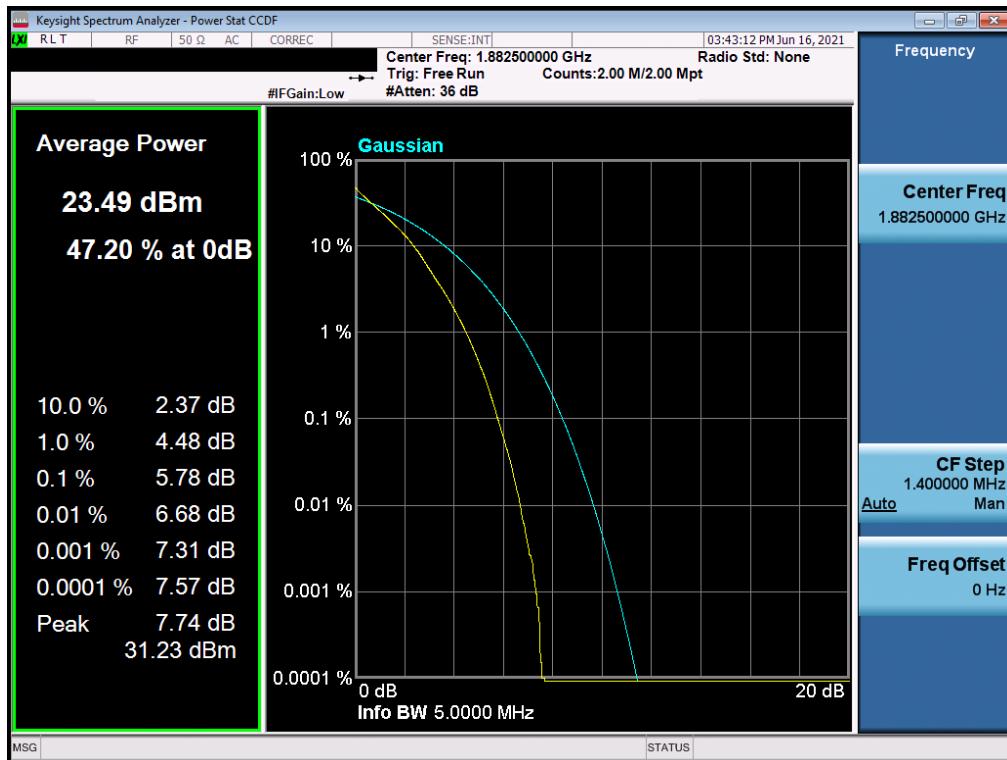


Plot 7-88. PAR Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

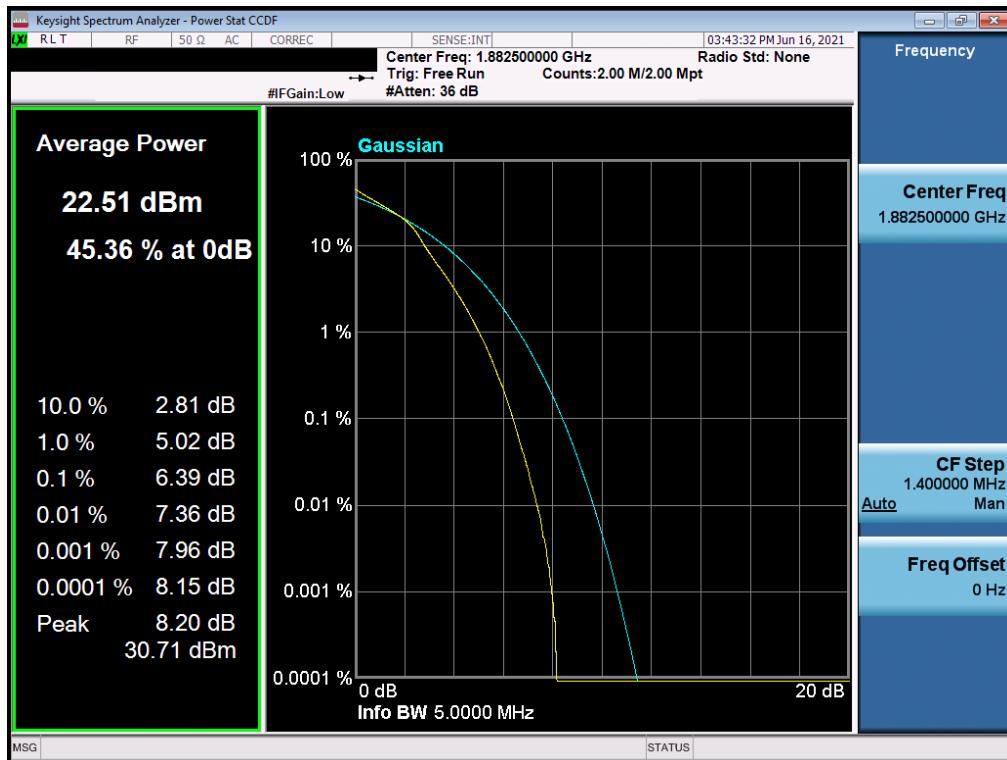


Plot 7-89. PAR Plot (LTE Band 25 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 64 of 88

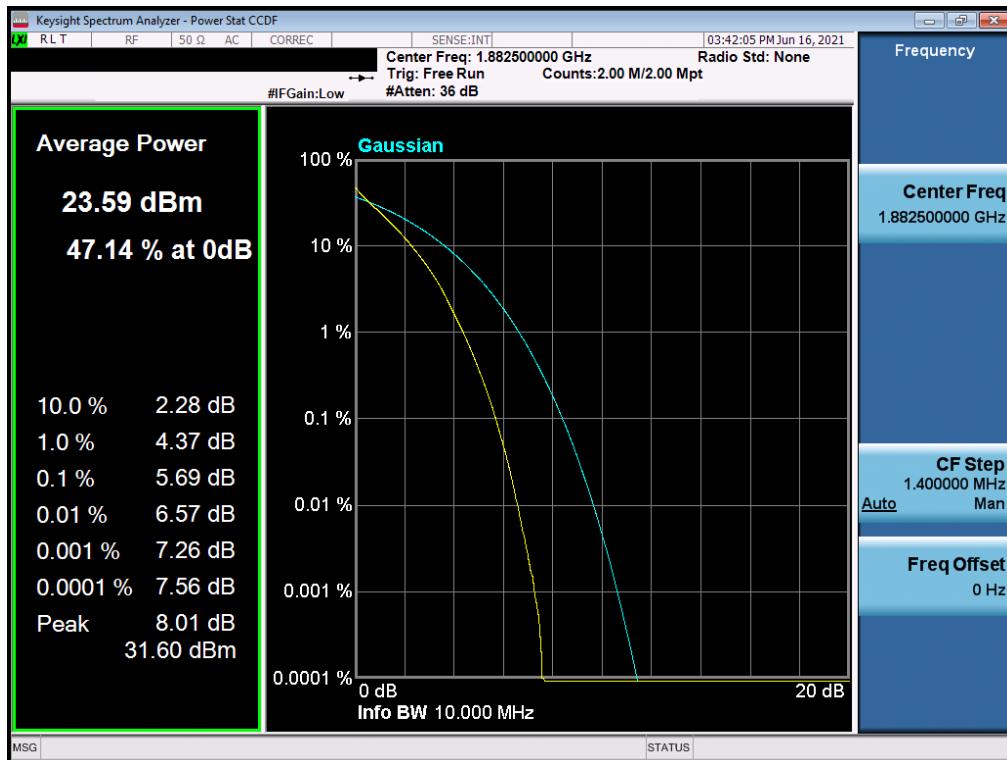


Plot 7-90. PAR Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

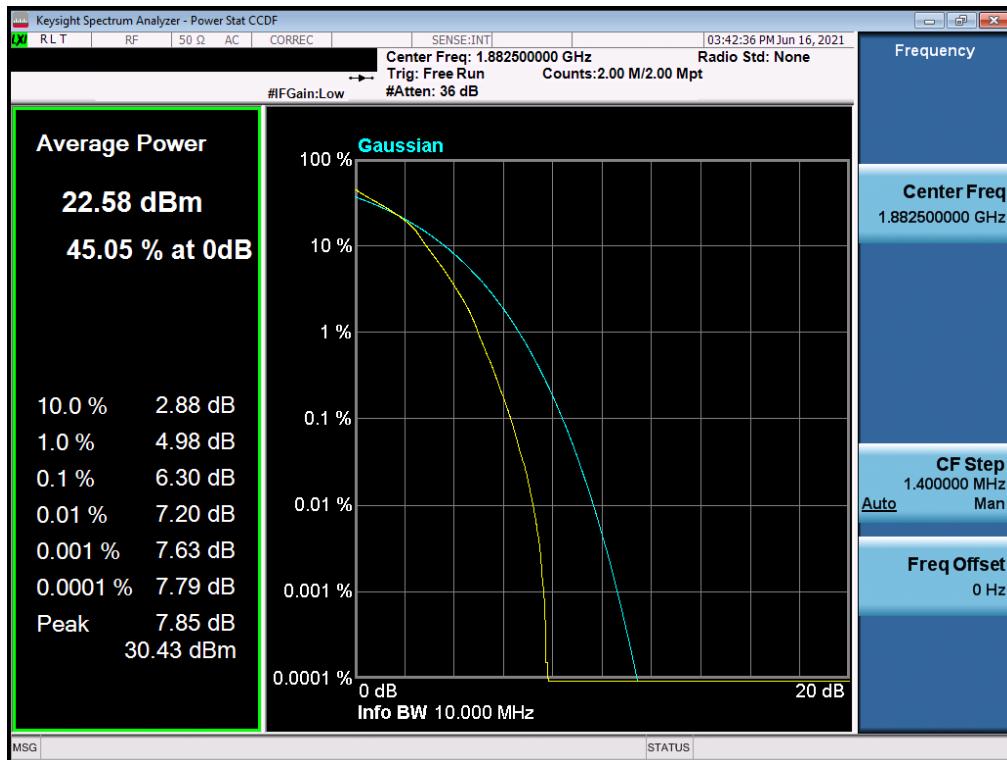


Plot 7-91. PAR Plot (LTE Band 25 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 65 of 88

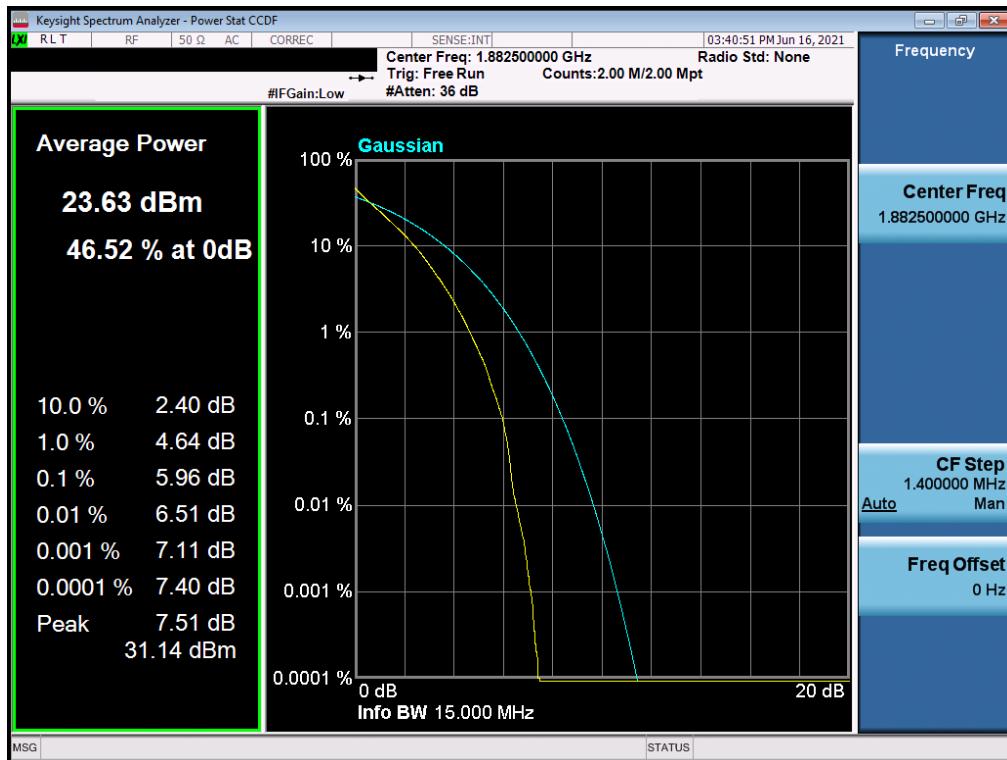


Plot 7-92. PAR Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

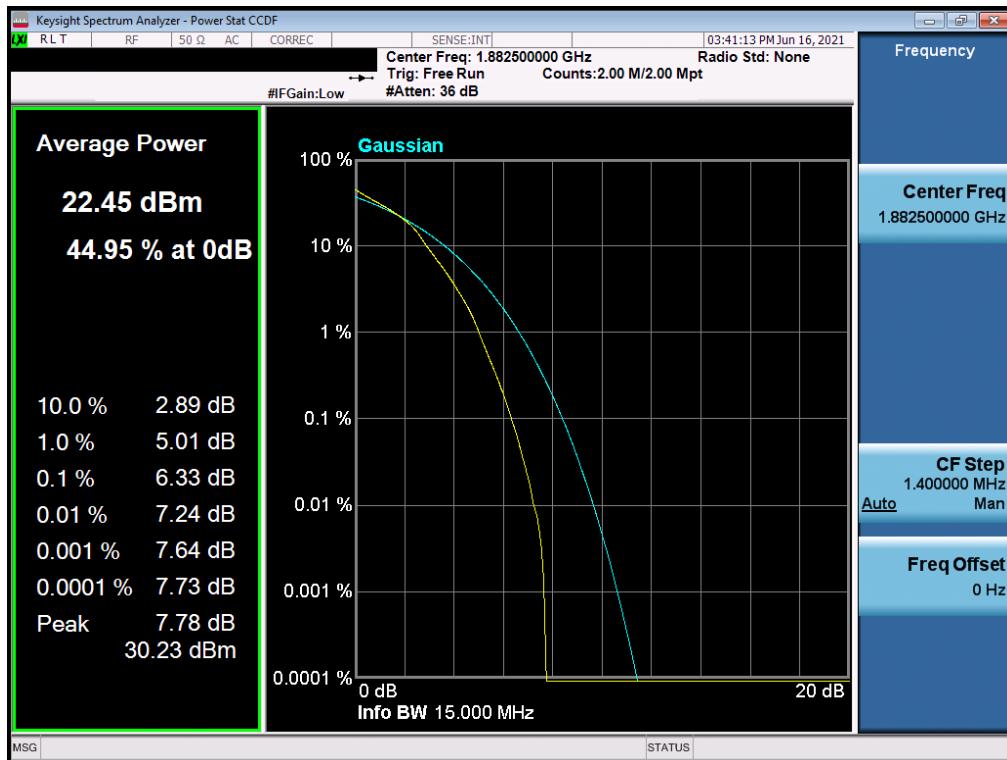


Plot 7-93. PAR Plot (LTE Band 25 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 66 of 88

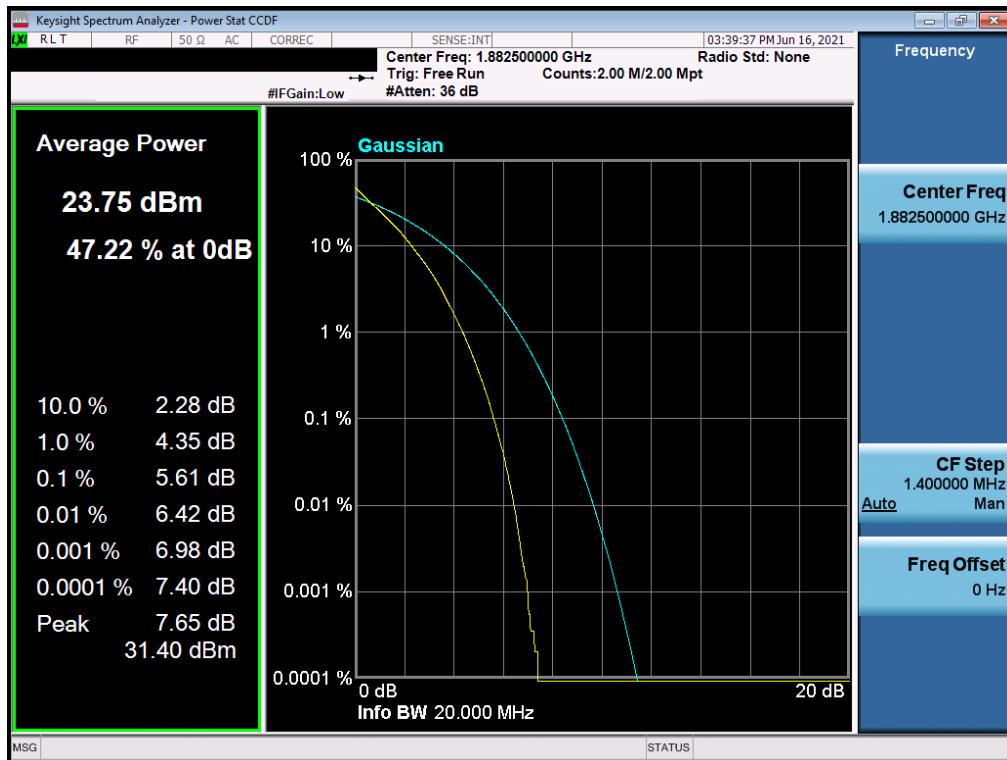


Plot 7-94. PAR Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)

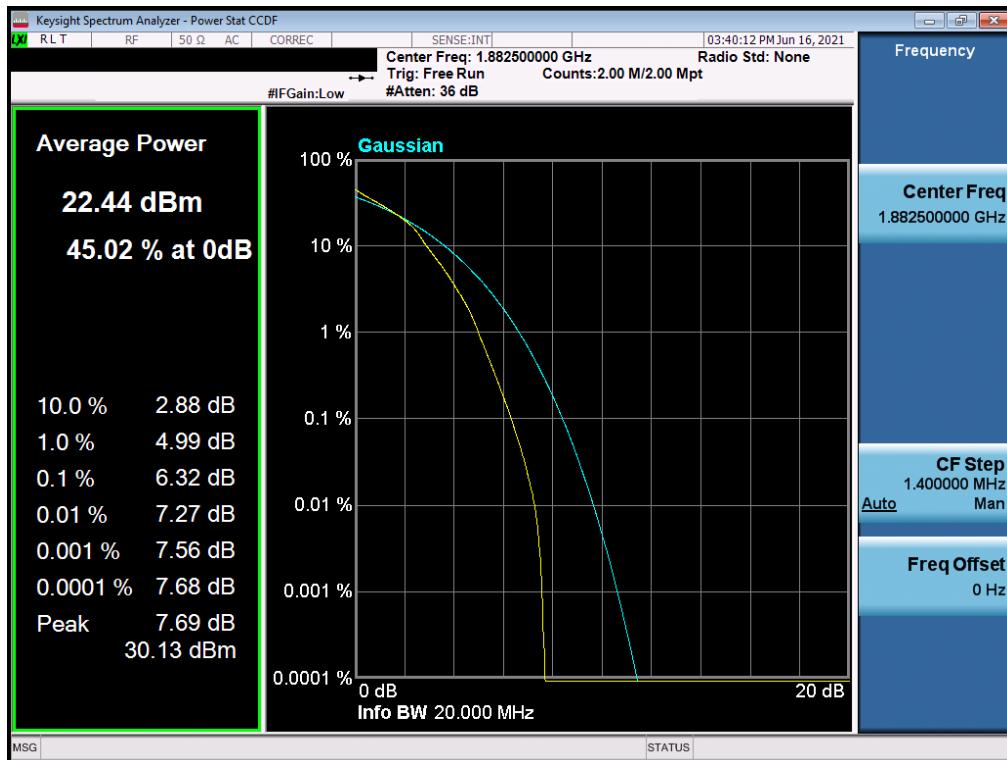


Plot 7-95. PAR Plot (LTE Band 25 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 67 of 88

LTE Band 2

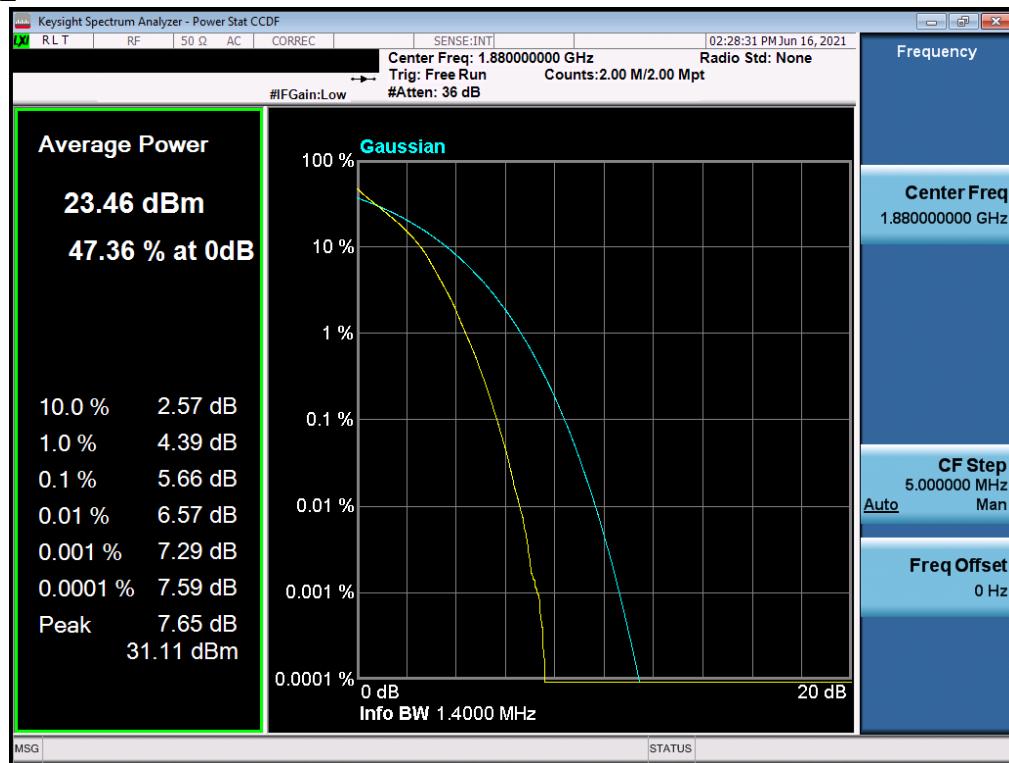


Plot 7-96. PAR Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

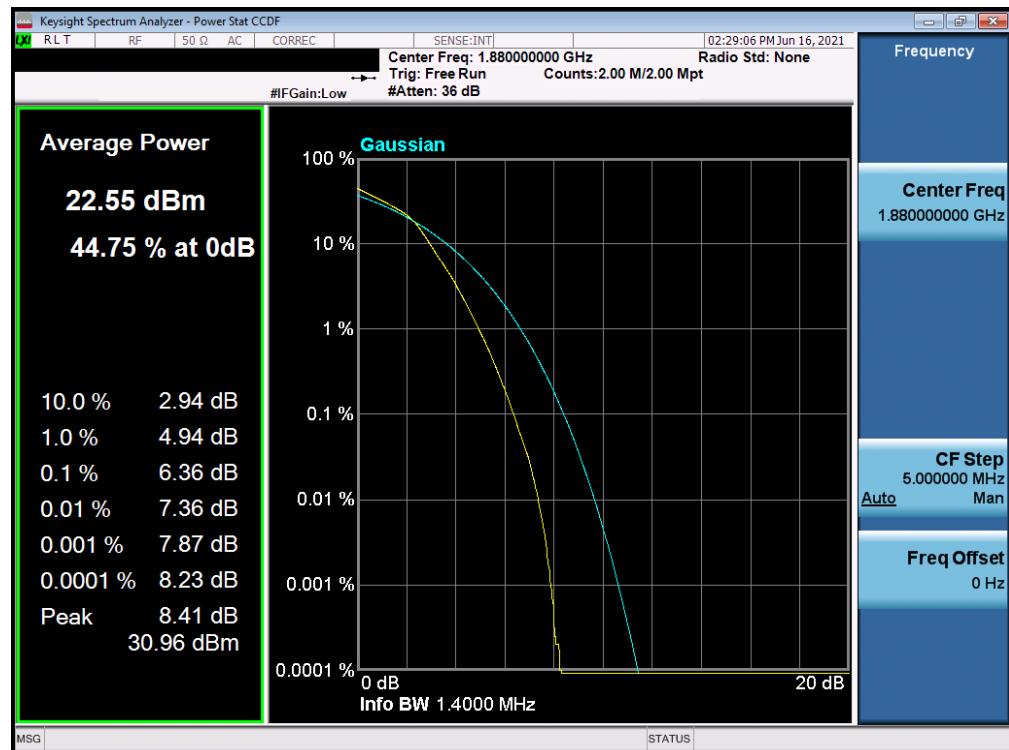


Plot 7-97. PAR Plot (LTE Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 68 of 88	

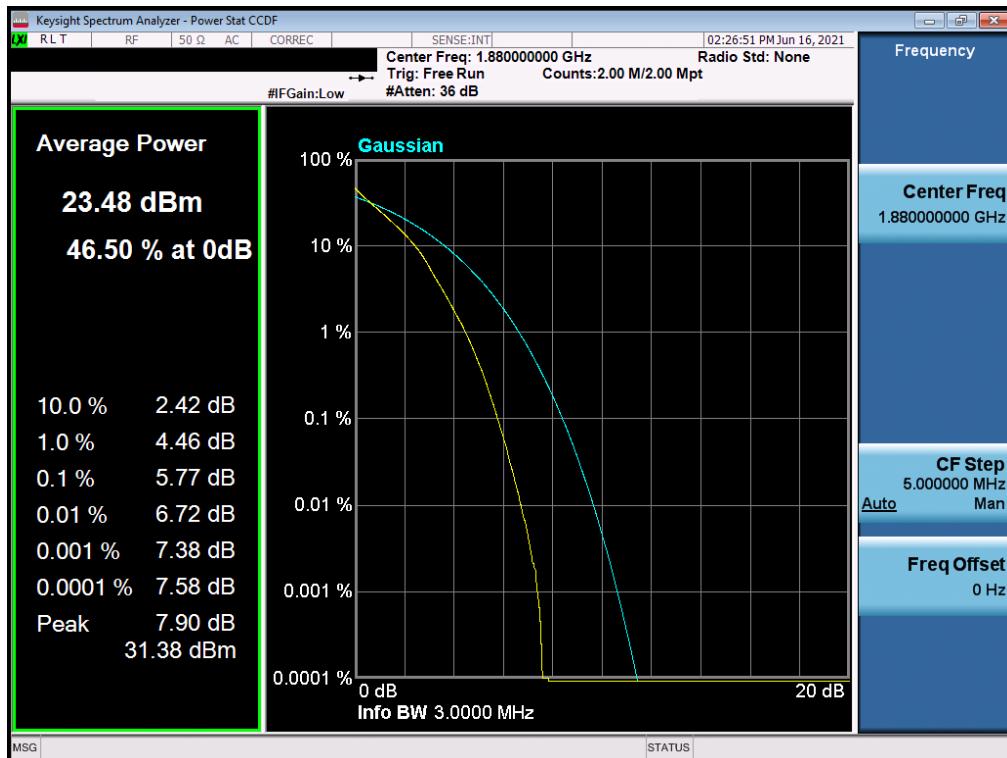


Plot 7-98. PAR Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

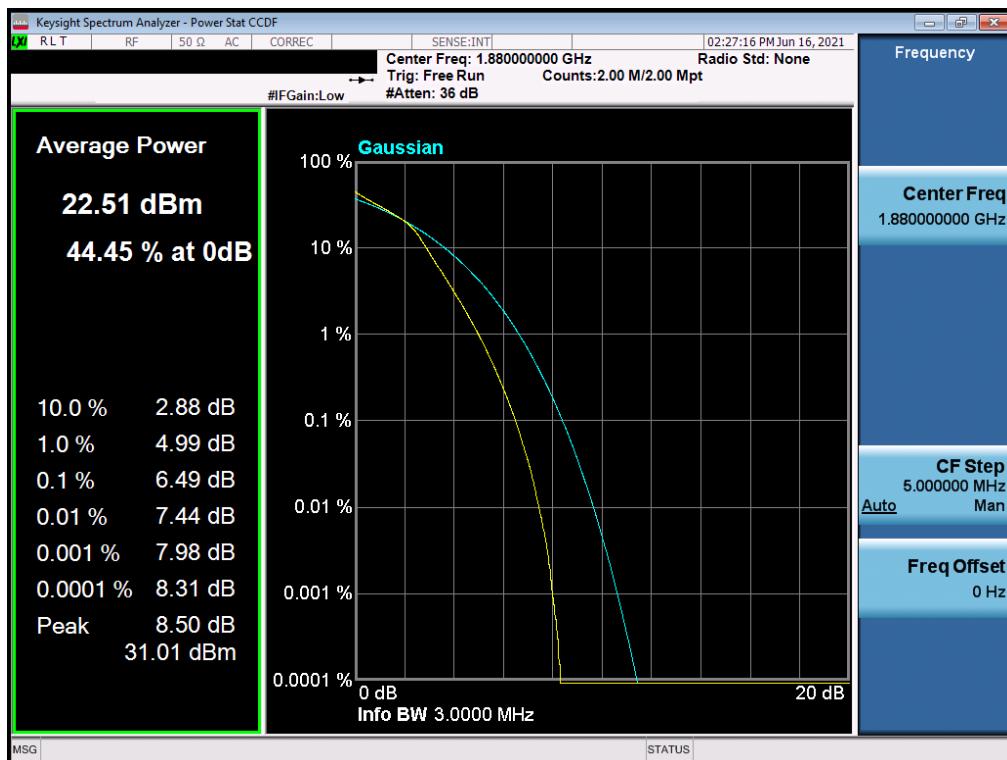


Plot 7-99. PAR Plot (LTE Band 2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 69 of 88

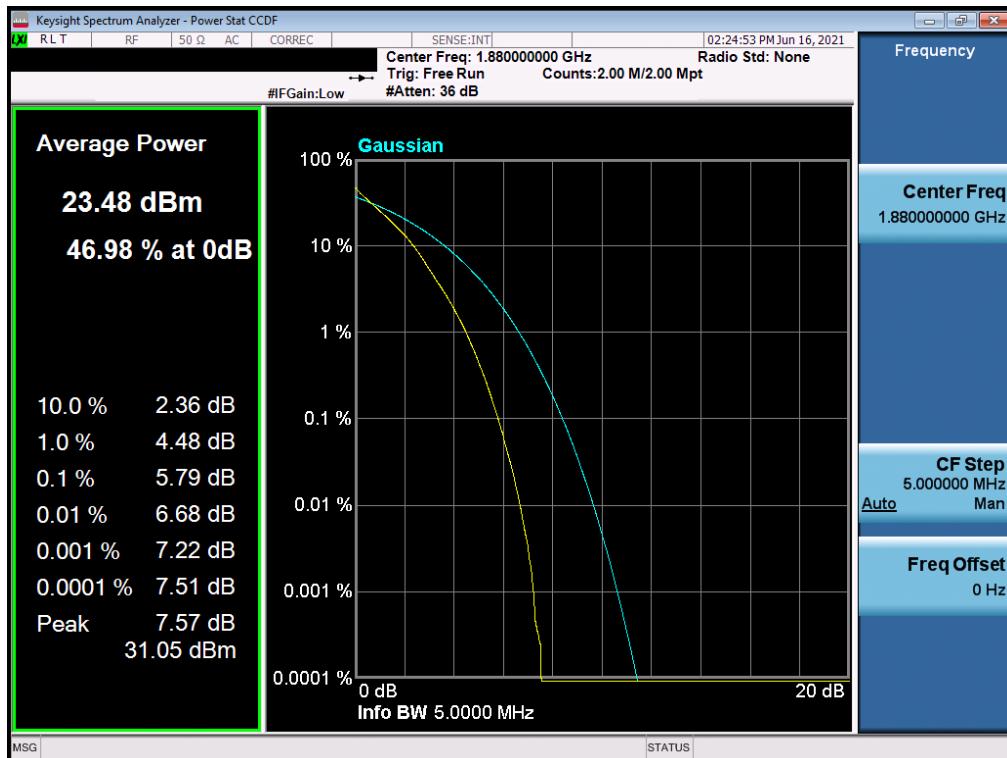


Plot 7-100. PAR Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

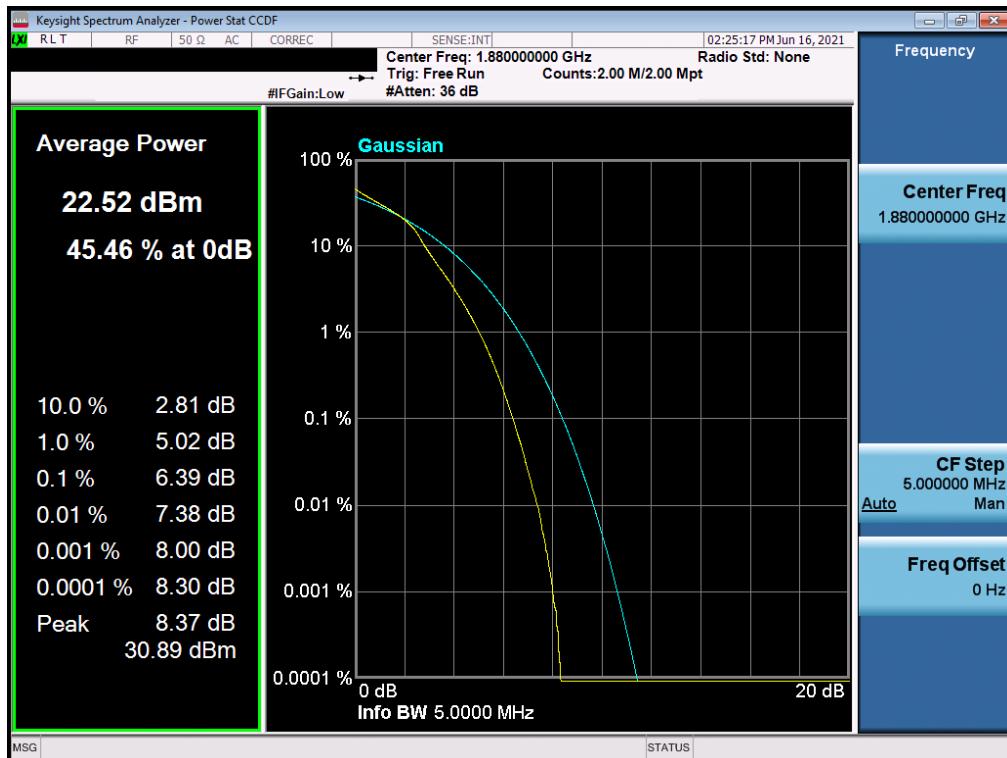


Plot 7-101. PAR Plot (LTE Band 2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 70 of 88

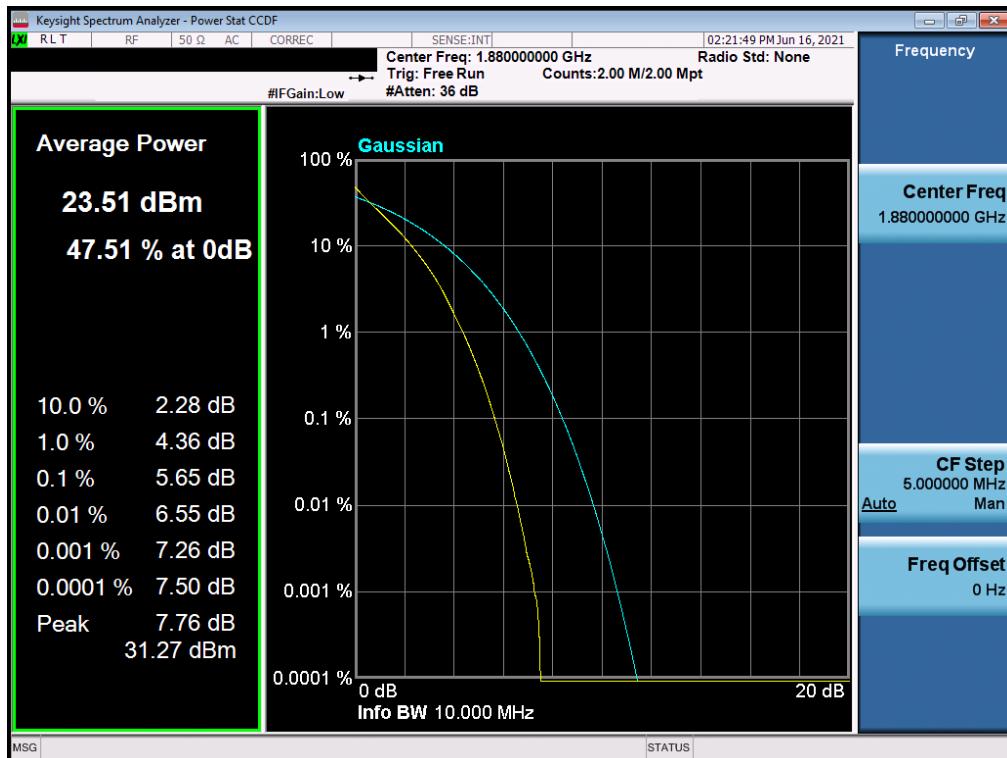


Plot 7-102. PAR Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

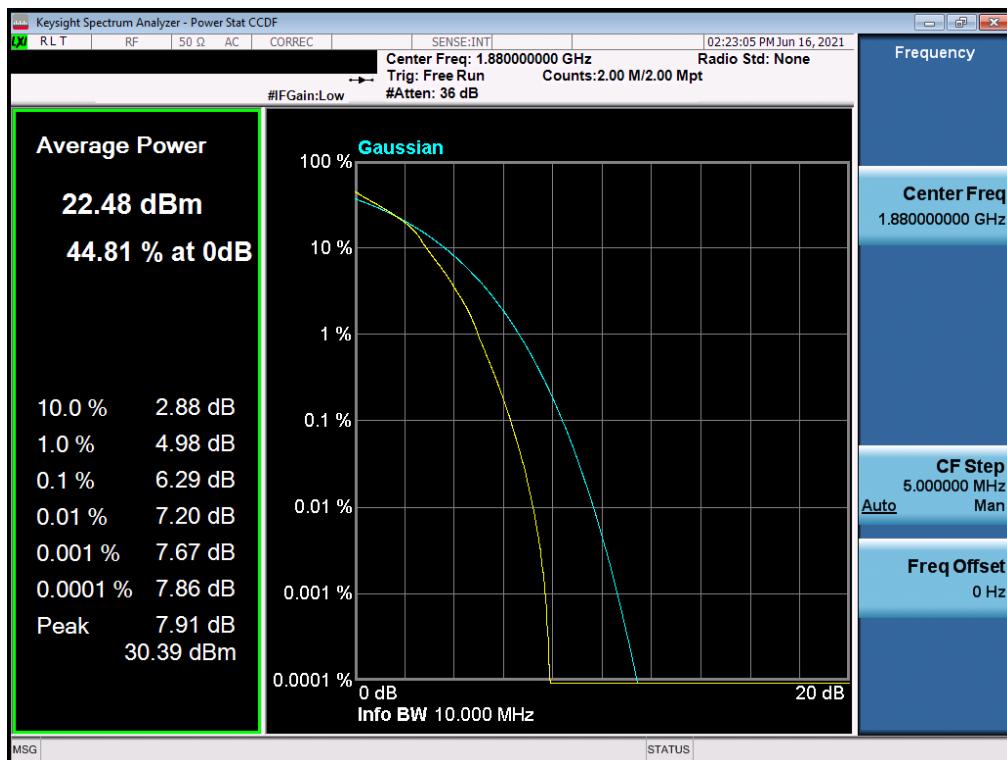


Plot 7-103. PAR Plot (LTE Band 2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 71 of 88

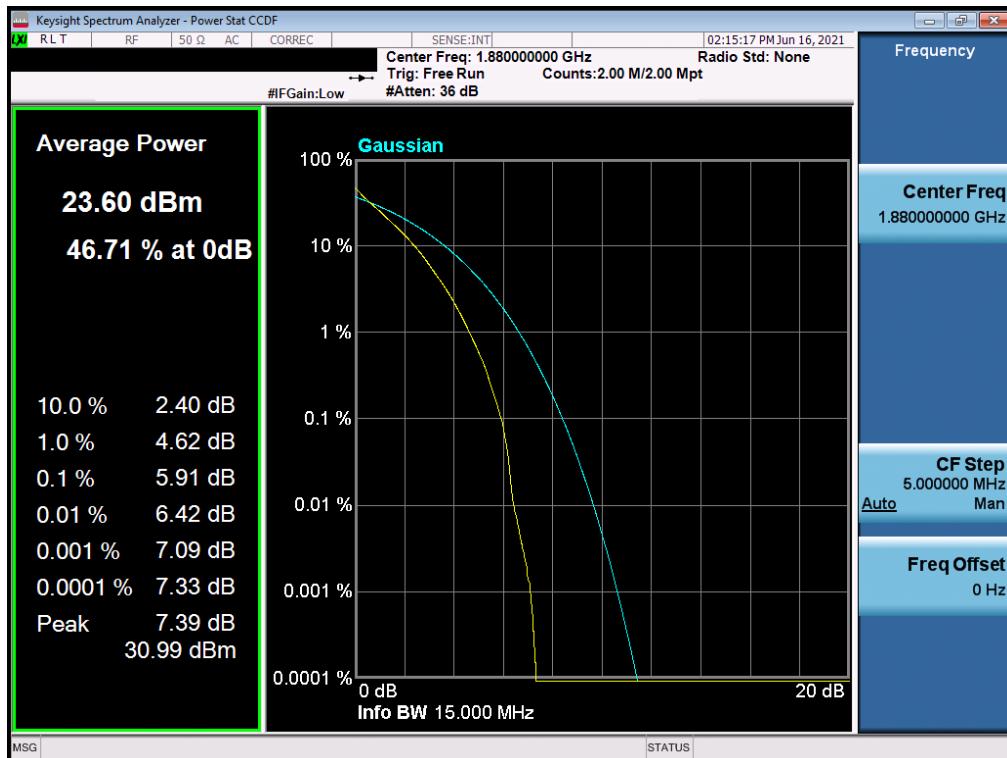


Plot 7-104. PAR Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

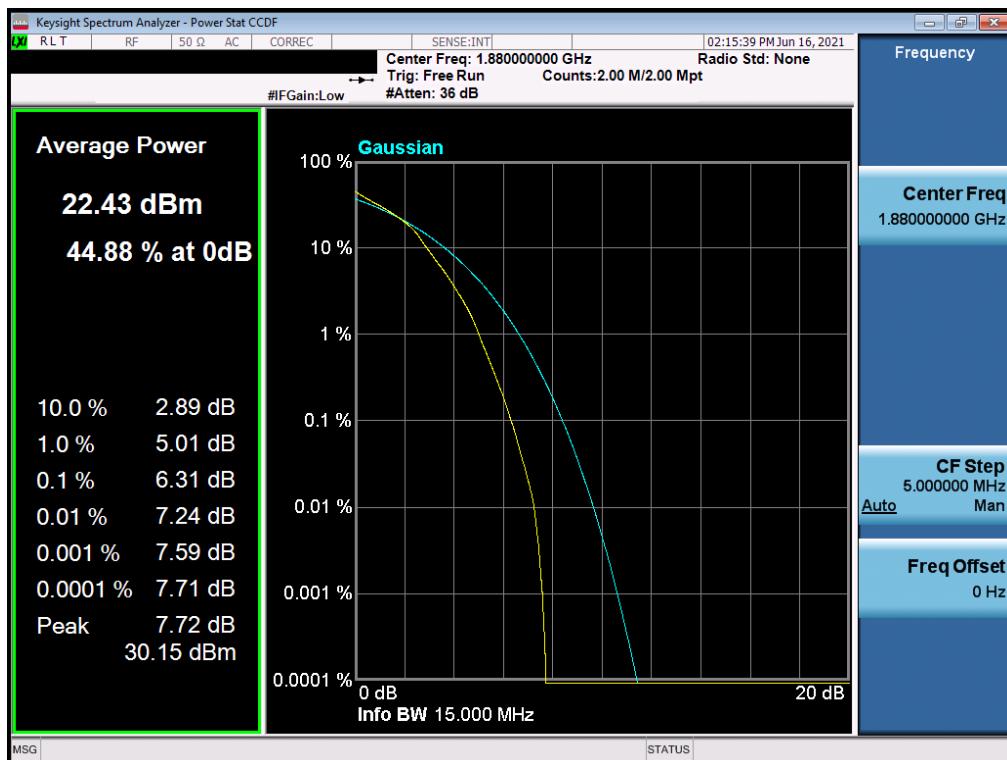


Plot 7-105. PAR Plot (LTE Band 2 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 72 of 88

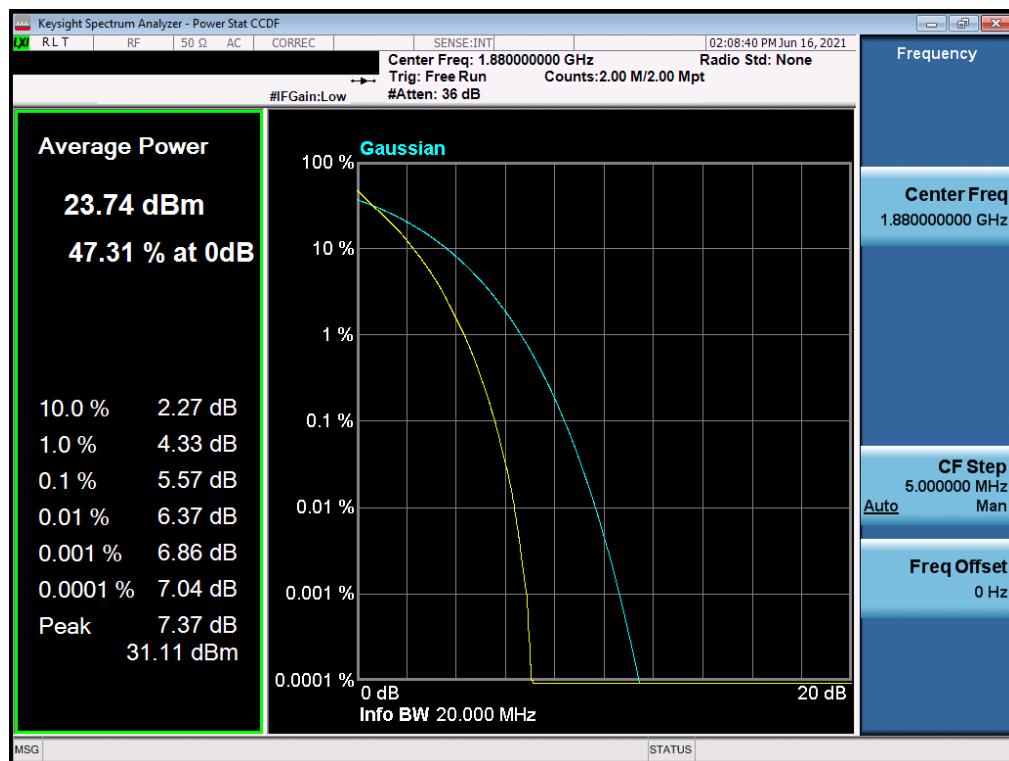


Plot 7-106. PAR Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)

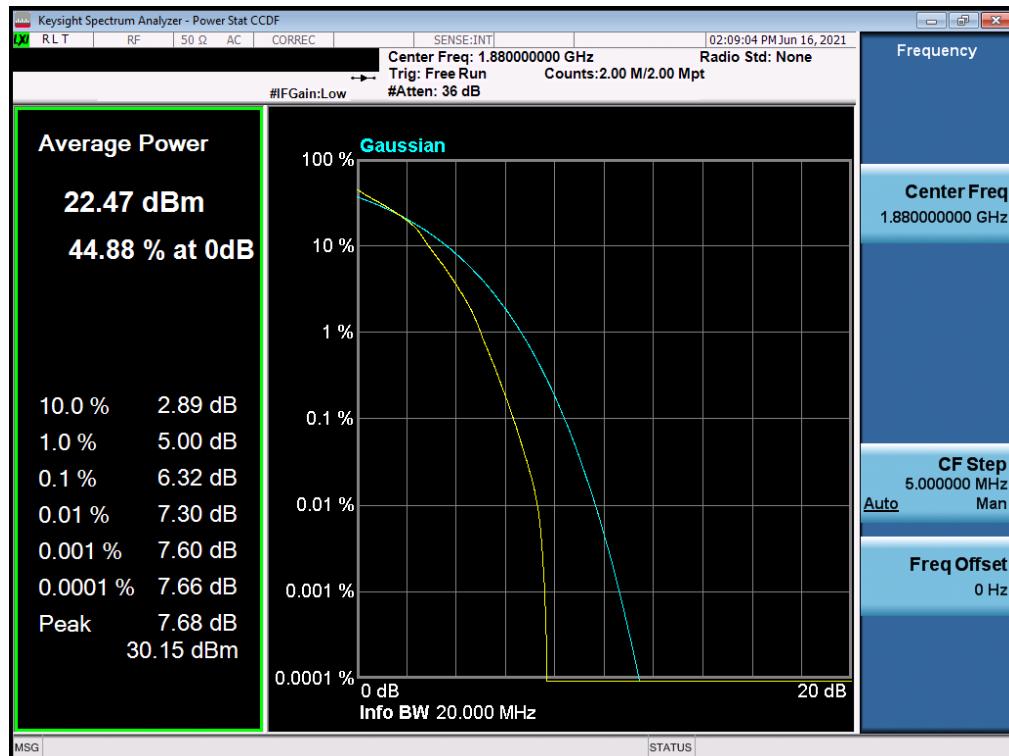

Plot 7-107. PAR Plot (LTE Band 2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 73 of 88

WCDMA PCS

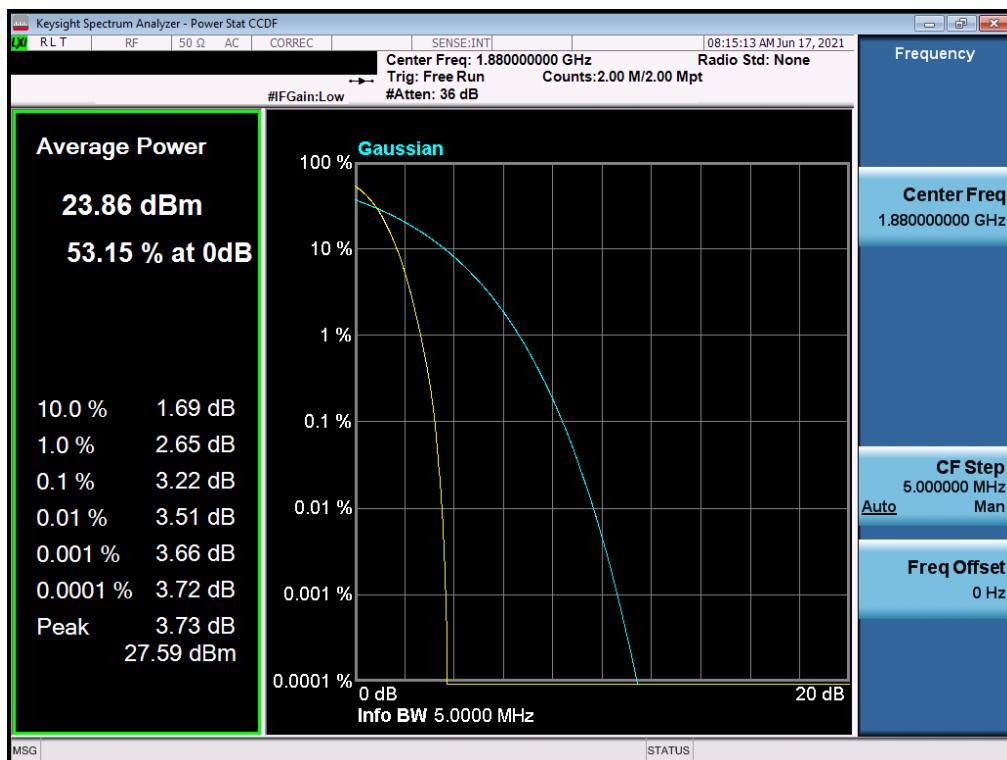

Plot 7-108. PAR Plot (WCDMA, Ch. 9400)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 74 of 88	

7.6 Radiated Power (EIRP)

§24.232(c)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015 – Section 5.2.5.5

Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

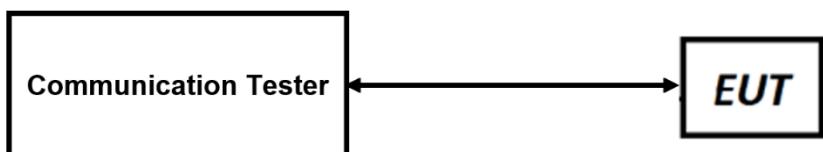



Figure 7-5. EIRP Measurement Setup

Test Notes

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.
3. The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
4. The Ant. Gains (GT) are listed in dBi.


FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 75 of 88

7.6.1 Antenna FCM – EIRP

LTE Band 25

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1850.7	-12.30	1 / 3	24.22	11.92	15.560	33.01	-21.09
		1882.5	-12.30	1 / 5	24.39	12.09	16.181	33.01	-20.92
		1914.3	-12.30	1 / 3	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1914.3	-12.30	1 / 5	23.76	11.46	13.996	33.01	-21.55
3 MHz	QPSK	1851.5	-12.30	1 / 0	24.22	11.92	15.560	33.01	-21.09
		1882.5	-12.30	1 / 0	24.38	12.08	16.144	33.01	-20.93
		1913.5	-12.30	1 / 0	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1913.5	-12.30	1 / 7	23.78	11.48	14.060	33.01	-21.53
5 MHz	QPSK	1852.5	-12.30	1 / 0	24.38	12.08	16.144	33.01	-20.93
		1882.5	-12.30	1 / 12	24.37	12.07	16.106	33.01	-20.94
		1912.5	-12.30	1 / 12	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1882.5	-12.30	1 / 12	23.85	11.55	14.289	33.01	-21.46
10 MHz	QPSK	1855.0	-12.30	1 / 49	24.29	11.99	15.812	33.01	-21.02
		1882.5	-12.30	1 / 25	24.49	12.19	16.558	33.01	-20.82
		1910.0	-12.30	1 / 49	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1882.5	-12.30	1 / 25	23.77	11.47	14.028	33.01	-21.54
20 MHz	QPSK	1857.5	-12.30	1 / 74	24.41	12.11	16.255	33.01	-20.90
		1882.5	-12.30	1 / 37	24.41	12.11	16.255	33.01	-20.90
		1907.5	-12.30	1 / 74	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1857.5	-12.30	1 / 74	23.83	11.53	14.223	33.01	-21.48
	QPSK	1860.0	-12.30	1 / 99	24.48	12.18	16.520	33.01	-20.83
		1882.5	-12.30	1 / 50	24.42	12.12	16.293	33.01	-20.89
		1905.0	-12.30	1 / 99	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1882.5	-12.30	1 / 50	23.90	11.60	14.454	33.01	-21.41

Table 7-2. Antenna FCM EIRP Data (LTE Band 2)

FCC ID: BCG-A2475	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 76 of 88


LTE Band 2

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1850.7	-12.30	1 / 5	24.31	12.01	15.885	33.01	-21.00
		1880.0	-12.30	1 / 0	24.35	12.05	16.032	33.01	-20.96
		1909.3	-12.30	1 / 5	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1880.0	-12.30	1 / 0	23.76	11.46	13.996	33.01	-21.55
3 MHz	QPSK	1851.5	-12.30	1 / 0	24.28	11.98	15.776	33.01	-21.03
		1880.0	-12.30	1 / 7	24.48	12.18	16.520	33.01	-20.83
		1908.5	-12.30	1 / 14	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1880.0	-12.30	1 / 7	23.85	11.55	14.289	33.01	-21.46
5 MHz	QPSK	1852.5	-12.30	1 / 24	24.40	12.10	16.218	33.01	-20.91
		1880.0	-12.30	1 / 12	24.45	12.15	16.406	33.01	-20.86
		1907.5	-12.30	1 / 24	24.50	12.20	16.596	33.01	-20.81
	16-QAM	1880.0	-12.30	1 / 12	24.03	11.73	14.894	33.01	-21.28
10 MHz	QPSK	1855.0	-12.30	1 / 49	24.33	12.03	15.959	33.01	-20.98
		1880.0	-12.30	1 / 25	24.50	12.20	16.596	33.01	-20.81
		1905.0	-12.30	1 / 25	24.43	12.13	16.331	33.01	-20.88
	16-QAM	1880.0	-12.30	1 / 25	23.80	11.50	14.125	33.01	-21.51
15 MHz	QPSK	1857.5	-12.30	1 / 74	24.40	12.10	16.218	33.01	-20.91
		1880.0	-12.30	1 / 0	24.50	12.20	16.596	33.01	-20.81
		1902.5	-12.30	1 / 0	24.43	12.13	16.331	33.01	-20.88
	16-QAM	1857.5	-12.30	1 / 0	23.91	11.61	14.488	33.01	-21.40
20 MHz	QPSK	1860.0	-12.30	1 / 99	24.50	12.20	16.596	33.01	-20.81
		1880.0	-12.30	1 / 50	24.46	12.16	16.444	33.01	-20.85
		1900.0	-12.30	1 / 0	24.45	12.15	16.406	33.01	-20.86
	16-QAM	1900.0	-12.30	1 / 0	23.92	11.62	14.521	33.01	-21.39

Table 7-3. Antenna FCM EIRP Data (LTE Band 2)
WCDMA PCS

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	23.96	-12.30	11.66	14.655	33.01	-21.35
1880.00	WCDMA1900	24.00	-12.30	11.70	14.791	33.01	-21.31
1907.60	WCDMA1900	23.92	-12.30	11.62	14.521	33.01	-21.39

Table 7-4. Antenna FCM EIRP Data (WCDMA PCS)

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch				

7.7 Radiated Spurious Emissions

§2.1053, 24.238(a)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A2475	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 78 of 88

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

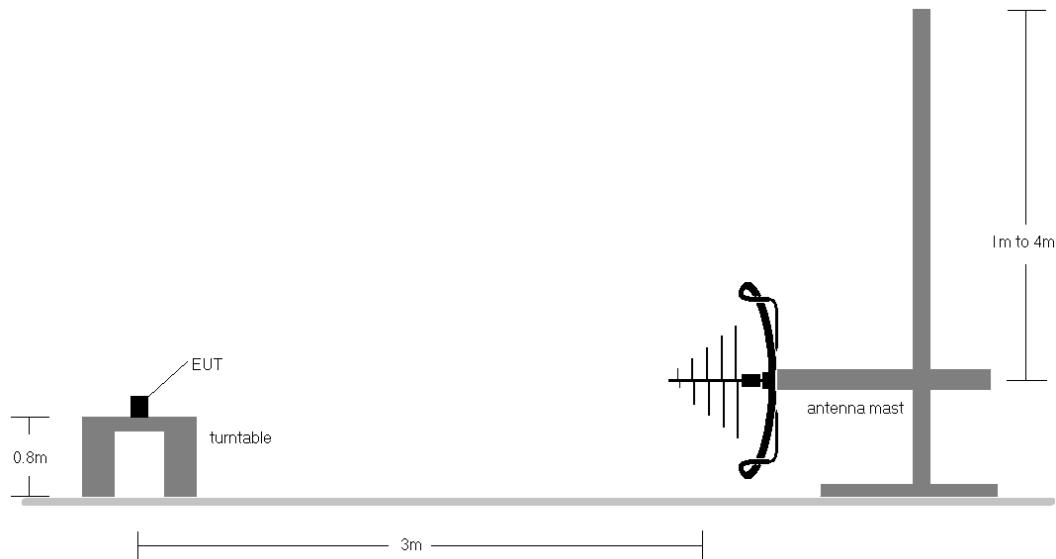


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

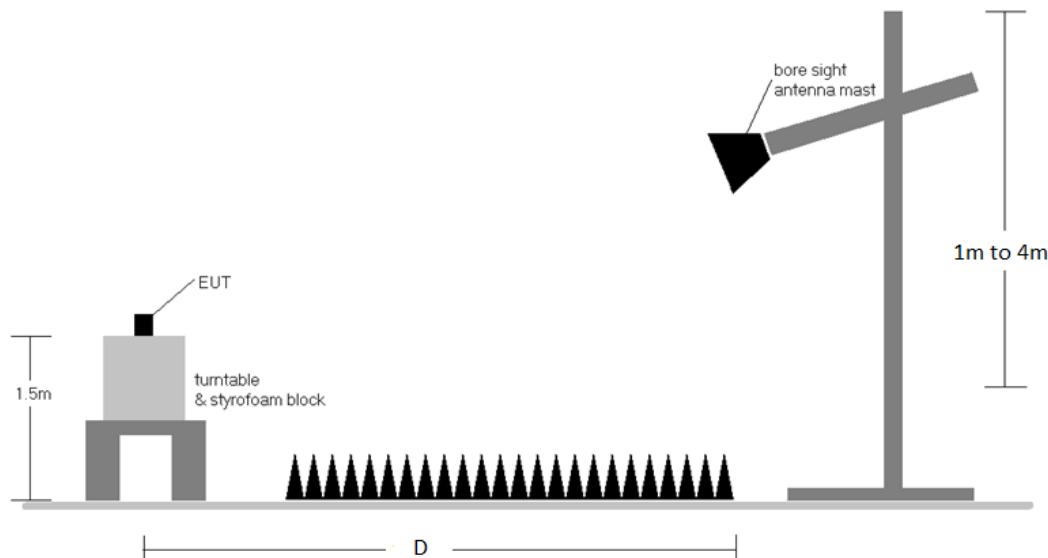



Figure 7-7. Test Instrument & Measurement Setup > 1 GHz


FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 79 of 88

Test Notes

1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a. $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b. $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
2. This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. No significant emissions were found for below 1GHz and Above 18GHz measurement.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 80 of 88	

7.7.1 Antenna FCM– Radiated Spurious Emission Measurement LTE Band 25/2

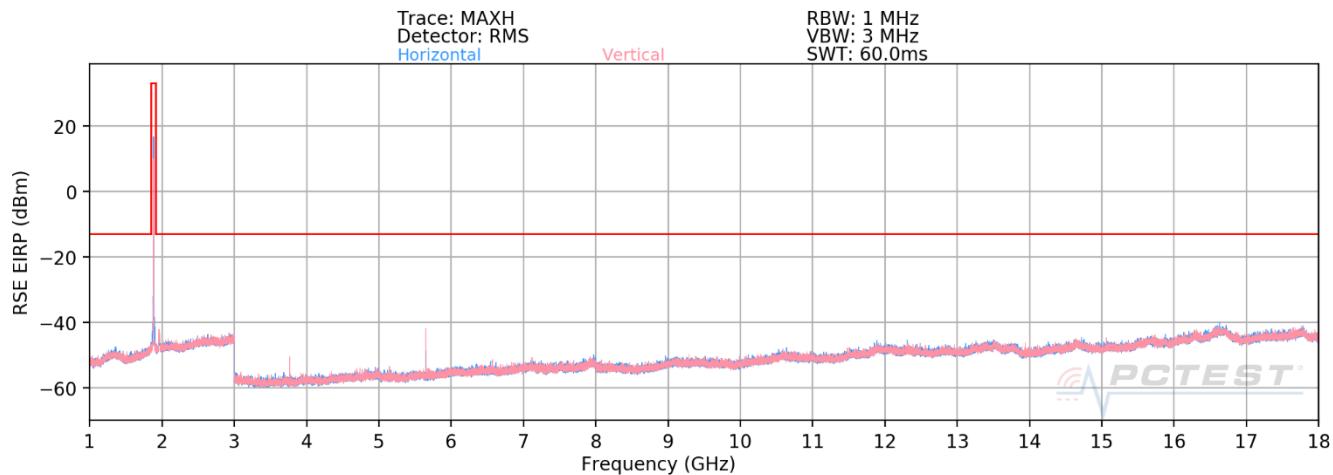

Plot 7-109. Antenna FCM Radiated Spurious Plot (LTE Band 25/2)

FCC ID: BCG-A2475	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 81 of 88	

Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	V	330	150	-75.45	6.83	38.38	-56.88	-13.00	-43.88
5580.0	V	311	168	-76.63	9.89	40.26	-55.00	-13.00	-42.00
7440.0	V	-	-	-84.96	12.39	34.43	-60.82	-13.00	-47.82
9300.0	V	-	-	-83.87	13.55	36.68	-58.57	-13.00	-45.57
11160.0	V	-	-	-85.14	16.46	38.32	-56.93	-13.00	-43.93

Table 7-5. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.0	V	101	159	-75.85	6.27	37.42	-57.84	-13.00	-44.84
5647.5	V	109	180	-65.59	9.36	50.77	-44.49	-13.00	-31.49
7530.0	V	-	-	-84.81	12.97	35.16	-60.10	-13.00	-47.10
9412.5	V	-	-	-84.49	14.52	37.03	-58.23	-13.00	-45.23
11295.0	V	-	-	-85.62	16.68	38.06	-57.19	-13.00	-44.19

Table 7-6. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – Mid Channel)


Bandwidth (MHz):	20
Frequency (MHz):	1905.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	V	379	132	-78.89	6.14	34.25	-61.01	-13.00	-48.01
5715.00	V	109	147	-68.89	9.41	47.52	-47.73	-13.00	-34.73
7620.00	V	-	-	-84.50	12.35	34.85	-60.41	-13.00	-47.41
9525.00	V	-	-	-84.96	14.70	36.74	-58.52	-13.00	-45.52
11430.00	V	-	-	-85.93	16.98	38.05	-57.21	-13.00	-44.21

Table 7-7. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – High Channel)

FCC ID: BCG-A2475	PCTEST Proud to be part of 						MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch						

WCDMA PCS

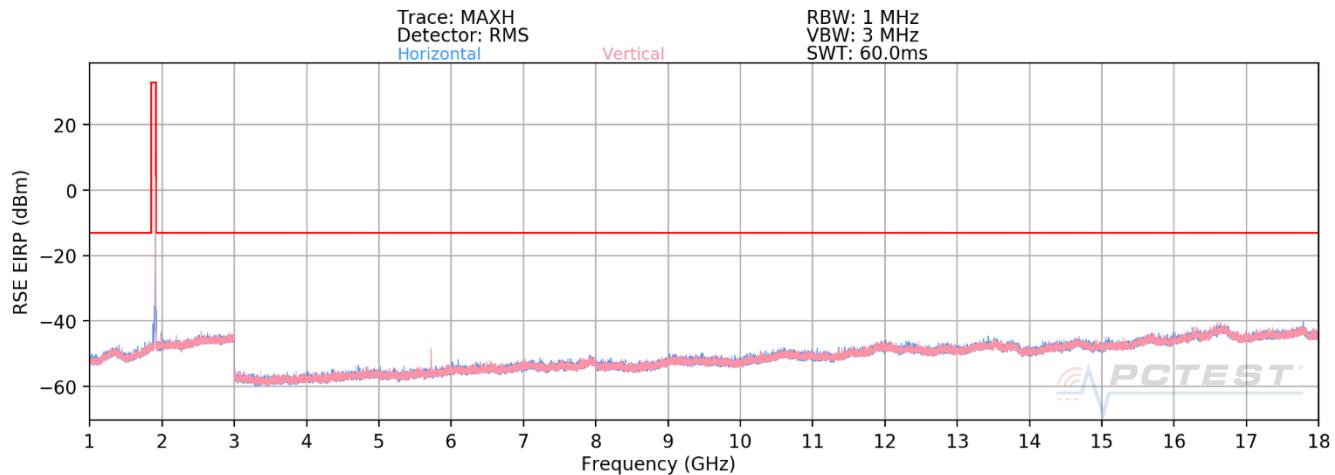

Plot 7-110. Antenna FCM Radiated Spurious Plot (WCDMA PCS)

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
FCC ID: BCG-A2475	 PCTEST Proud to be part of 	Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021

Mode:	WCDMA RMC
Channel:	9262
Frequency (MHz):	1852.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3704.8	V	123	165	-80.53	6.80	33.27	-61.99	-13.00	-48.99
5557.2	V	330	159	-74.10	9.99	42.89	-52.37	-13.00	-39.37
7409.6	V	-	-	-84.32	12.23	34.91	-60.35	-13.00	-47.35
9262.0	V	-	-	-83.65	13.43	36.78	-58.48	-13.00	-45.48
11114.4	V	-	-	-84.90	16.49	38.59	-56.67	-13.00	-43.67

Table 7-8. Antenna FCM Radiated Spurious Data (WCDMA PCS – Low Channel)

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	V	117	178	-80.74	6.28	32.54	-62.72	-13.00	-49.72
5640.0	V	298	178	-72.53	9.47	43.94	-51.31	-13.00	-38.31
7520.0	V	-	-	-84.46	12.91	35.45	-59.81	-13.00	-46.81
9400.0	V	-	-	-84.12	14.59	37.47	-57.79	-13.00	-44.79
11280.0	V	-	-	-84.95	16.63	38.68	-56.58	-13.00	-43.58

Table 7-9. Antenna FCM Radiated Spurious Data (WCDMA PCS – Mid Channel)

Mode:	WCDMA RMC
Channel:	9538
Frequency (MHz):	1907.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3815.2	V	316	164	-79.67	6.13	33.46	-61.79	-13.00	-48.79
5722.8	V	330	171	-71.34	9.43	45.09	-50.16	-13.00	-37.16
7630.4	V	-	-	-84.01	12.28	35.27	-59.99	-13.00	-46.99
9538.0	V	-	-	-84.66	14.65	36.99	-58.27	-13.00	-45.27
11445.6	V	-	-	-85.58	17.03	38.45	-56.81	-13.00	-43.81

Table 7-10. Antenna FCM Radiated Spurious Data (WCDMA PCS – High Channel)

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch	Page 84 of 88

7.8 Frequency Stability / Temperature Variation

[\\$2.1055](#), [\\$24.235](#)

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

Test Settings

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

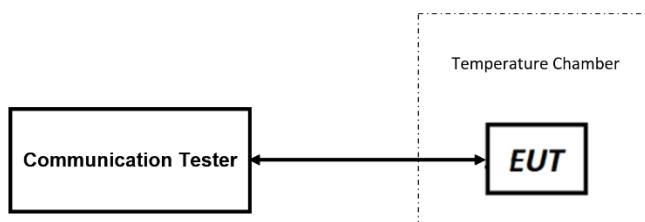


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 85 of 88

Frequency Stability / Temperature Variation

LTE Band 25/2							
		Low Channel Frequency (Hz):		1,852,400,000			
		High Channel Frequency (Hz):		1,907,600,000			
		Ref. Voltage (VDC):		3.80			
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,852,400,067	1,907,600,068	39.61	32.57	0.0000021
		- 20	1,852,400,052	1,907,600,074	24.91	37.87	0.0000020
		- 10	1,852,400,060	1,907,600,070	32.33	33.99	0.0000018
		0	1,852,400,060	1,907,600,072	32.52	36.03	0.0000019
		+ 10	1,852,400,050	1,907,600,055	23.29	19.51	0.0000013
		+ 20 (Ref)	1,852,400,027	1,907,600,036	0.00	0.00	0.0000000
		+ 30	1,852,400,044	1,907,600,055	17.27	19.71	0.0000010
		+ 40	1,852,400,058	1,907,600,071	30.63	35.36	0.0000019
		+ 50	1,852,400,067	1,907,600,071	39.42	35.09	0.0000021
		Battery Endpoint	3.40	+ 20	1,852,400,055	1,907,600,067	27.59

Table 7-11. LTE Band 25/2 Frequency Stability Data

Note: The lowest and highest channel of this band have been tested and is determined to remain operating in-band over the temperature and voltage range as tested

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch			

Frequency Stability / Temperature Variation

WCDMA PCS							
		Low Channel Frequency (Hz):		1,852,400,000			
		High Channel Frequency (Hz):		1,907,600,000			
		Ref. Voltage (VDC):		3.80			
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,852,399,999	1,907,599,999	-1.00	-1.00	-0.0000001
		- 20	1,852,399,999	1,907,599,999	-1.00	-1.00	-0.0000001
		- 10	1,852,399,998	1,907,599,999	-2.00	-1.00	-0.0000001
		0	1,852,399,999	1,907,599,999	-1.00	-1.00	-0.0000001
		+ 10	1,852,399,998	1,907,599,998	-2.00	-2.00	-0.0000001
		+ 20 (Ref)	1,852,400,000	1,907,600,000	0.00	0.00	0.0000000
		+ 30	1,852,399,999	1,907,599,999	-1.00	-1.00	-0.0000001
		+ 40	1,852,399,999	1,907,599,999	-1.00	-1.00	-0.0000001
		+ 50	1,852,400,000	1,907,600,001	0.00	1.00	0.0000001
		Battery Endpoint	3.40	+ 20	1,852,400,001	1,907,600,000	1.00

Table 7-12. WCDMA PCS Frequency Stability Data

Note: The lowest and highest channel of this band have been tested and is determined to remain operating in-band over the temperature and voltage range as tested

FCC ID: BCG-A2475	 PCTEST [®] Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch			

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Watch FCC ID: BCG-A2476** complies with all the requirements of Part 24 of the FCC rules.

FCC ID: BCG-A2475	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070044-02.BCG	Test Dates: 06-08-2021 - 08-11-2021	EUT Type: Watch		Page 88 of 88