

APPENDIX B: SYSTEM VERIFICATION

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.84 S/m; perm = 38.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 08/12/2022; Ambient Temp: 22.4°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3837; ConvF:(7.21,7.21,7.21); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2022-01-13

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.0.2.136

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.2 W/kg

SAR (1 g) = 5.26 W/kg

Deviation (1 g) = -2.95%

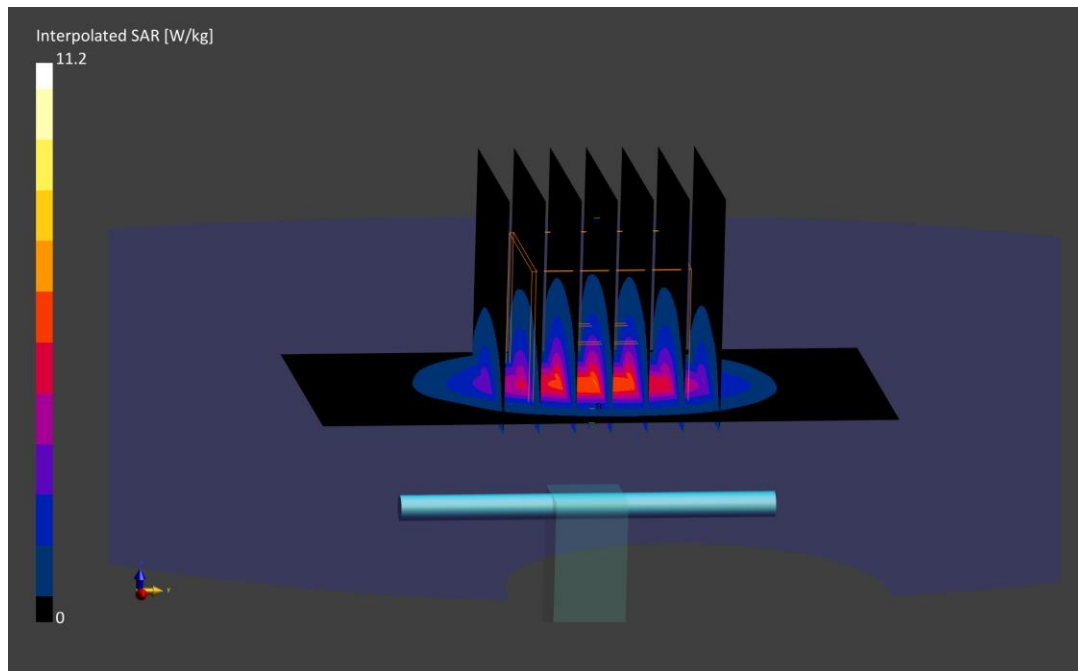

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.86$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 08/14/2022; Ambient Temp: 21.9°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3837; ConvF:(7.21,7.21,7.21); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2022-01-13

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.0.2.136

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.43 W/kg

Deviation (1 g) = 0.18%

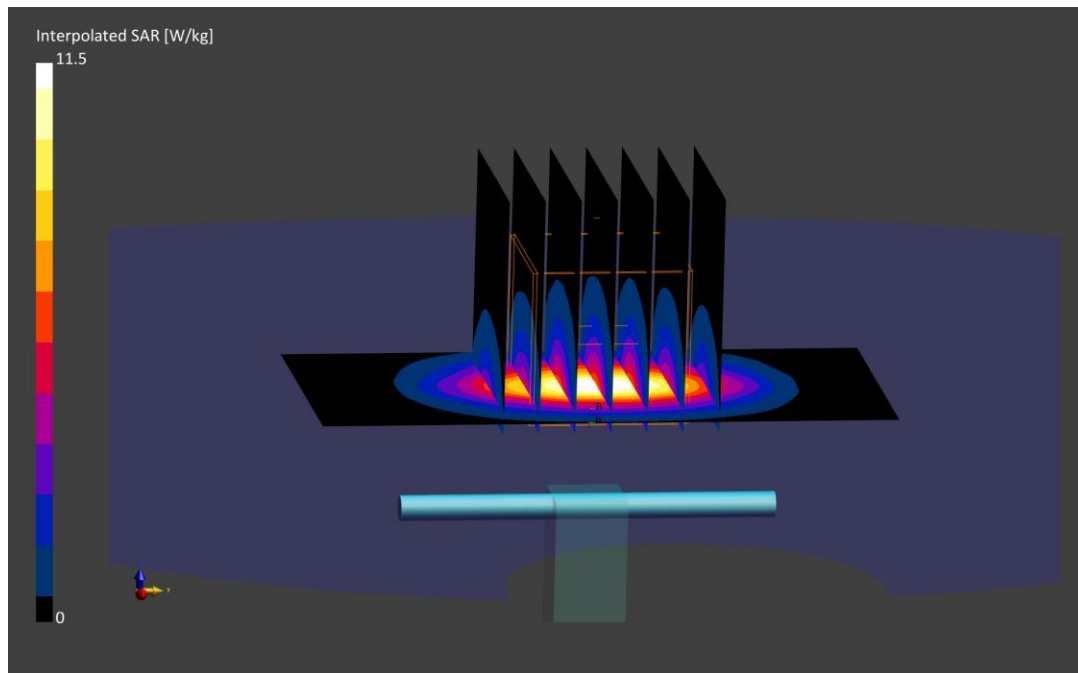

ELEMENT

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5250.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5250.0$ MHz; $\text{cond} = 4.53$ S/m; $\text{perm} = 35.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 08/26/2022; Ambient Temp: 20.9°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7638; ConvF:(5.59,5.59,5.59); Calibrated: 2022-03-22

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2022-03-21

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.0.2.136

5250 MHz System Verification at 17 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.2 W/kg

SAR (1 g) = 4.02 W/kg

Deviation (1 g) = -0.12%

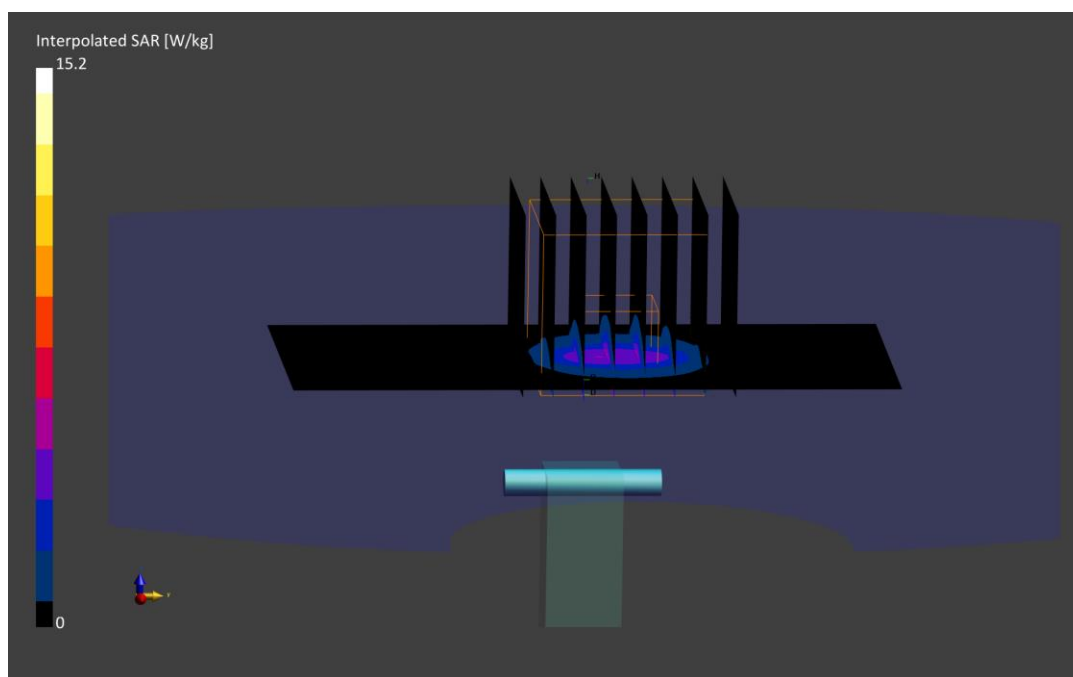

ELEMENT

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5600.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5600.0$ MHz; $\text{cond} = 4.94$ S/m; $\text{perm} = 35.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 08/26/2022; Ambient Temp: 20.9°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7638; ConvF:(4.96,4.96,4.96); Calibrated: 2022-03-22

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2022-03-21

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.0.2.136

5600 MHz System Verification at 17 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.7 W/kg

SAR (1 g) = 4.38 W/kg

Deviation (1 g) = 4.66%

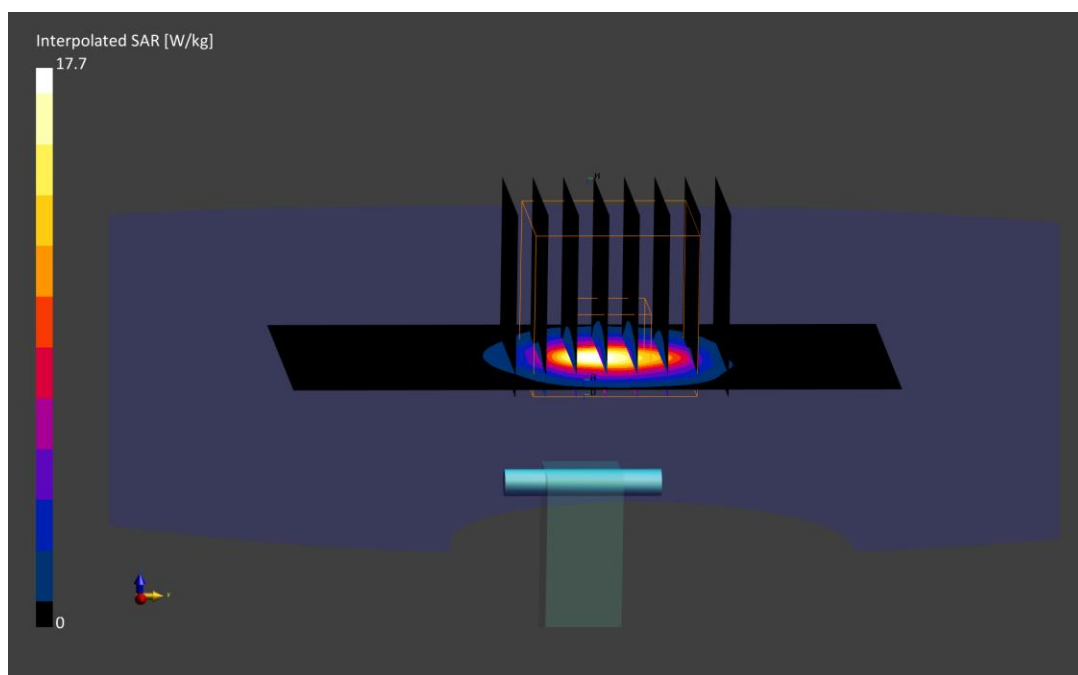

ELEMENT

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5750.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5750.0$ MHz; $\text{cond} = 5.09$ S/m; $\text{perm} = 34.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 08/26/2022; Ambient Temp: 20.9°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7638; ConvF:(5.18,5.18,5.18); Calibrated: 2022-03-22

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2022-03-21

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.0.2.136

5750 MHz System Verification at 17 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.5 W/kg

SAR (1 g) = 4.21 W/kg

Deviation (1 g) = 4.60%

