



MEASUREMENT REPORT

FCC PART 15.407 Narrowband UNII LE

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

6/7/2022 - 8/23/2022

Test Site/Location:

Element Washington DC LLC Morgan Hill, CA, USA

Test Report Serial No.:

1C2204080014-05.BCG

| | |
|-------------------|-------------------|
| FCC ID: | BCG-A2699 |
| APPLICANT: | Apple Inc. |

Application Type:

Certification

Model/HVIN:

A2699

EUT Type:

Wireless Earbud

Frequency Range:

5157 – 5245MHz, 5731 – 5844MHz

Modulation Type:

GFSK

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01,

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortiz
Executive Vice President




CERT #2041.02

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 1 of 50 |


T A B L E O F C O N T E N T S

| | | |
|-----|--|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope..... | 4 |
| 1.2 | Element Washington DC LLC Test Location..... | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Antenna Description..... | 6 |
| 2.4 | Test Support Equipment..... | 6 |
| 2.5 | Test Configuration..... | 7 |
| 2.6 | Software and Firmware | 7 |
| 2.7 | EMI Suppression Device(s)/Modifications..... | 7 |
| 3.0 | DESCRIPTION OF TESTS | 8 |
| 3.1 | Evaluation Procedure..... | 8 |
| 3.2 | AC Line Conducted Emissions | 8 |
| 3.3 | Radiated Emissions..... | 9 |
| 3.4 | Environmental Conditions..... | 9 |
| 4.0 | ANTENNA REQUIREMENTS | 10 |
| 5.0 | MEASUREMENT UNCERTAINTY | 11 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA..... | 12 |
| 7.0 | TEST RESULTS | 13 |
| 7.1 | Summary..... | 13 |
| 7.2 | 26dB & 99% Bandwidth Measurement – LE | 14 |
| 7.3 | 6dB & 99% Bandwidth Measurement – LE | 17 |
| 7.4 | Conducted Output Power – LE..... | 20 |
| 7.5 | Maximum Power Spectral Density – LE..... | 22 |
| 7.6 | Radiated Spurious Emission – Above 1GHz..... | 29 |
| | 7.6.1 Radiated Spurious Emission..... | 32 |
| | 7.6.2 Radiated Band Edge Measurements | 39 |
| 7.7 | Radiated Spurious Emissions – Below 1GHz | 41 |
| 7.8 | AC Line Conducted Emissions Measurement..... | 45 |
| 8.0 | CONCLUSION | 49 |
| 9.0 | APPENDIX A | 50 |

| | | | | |
|---|--|------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 2 of 50 |



MEASUREMENT REPORT



| UNII Band | Mode | Tx Frequency (MHz) | Max. Power (mW) | Max. Power (dBm) |
|-----------|------|--------------------|-----------------|------------------|
| 1 | LE2M | 5157 - 5245 | 10.000 | 10.00 |
| 3 | LE2M | 5731 - 5844 | 21.827 | 13.39 |

FCC EUT Overview

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 3 of 50 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 4 of 50 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Wireless Left Earbud FCC ID: BCG-A2699**. The test data contained in this report pertains only to the emissions due to the EUT's Narrowband UNII transmitter.

- This Narrowband UNII module has been tested by manufacturer and the following were confirmed:
 - A) The hopping sequence is pseudorandom
 - B) 79 channels can be used at a time for hopping
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
 - E) Narrowband UNII can only hop within the same UNII band and cannot hop between bands

Test Device Serial No.: HM6HR0P518JQ, HM6HQ1QH18JQ, HM6HV17018JQ

2.2 Device Capabilities

This device contains the following capabilities:

Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8, HDRp4, HDRp8), NB UNII (1x, LE2M, HDR4, HDR8, HDRp4, HDRp8).

| Band 1 | Band 3 |
|-----------------|-----------------|
| Frequency (MHz) | Frequency (MHz) |
| 5157 | 5731 |
| : | : |
| 5201 | 5788 |
| : | : |
| 5245 | 5844 |

Table 2-1. NB UNII LE Frequency of Operations

Notes:

This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the U-NII Band 1 & U-NII Band 3. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B2(b) of KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Measured Duty Cycles | | |
|----------------------|-----------------|----------------|
| Mode | Frequency (MHz) | Duty Cycle [%] |
| NB UNII LE2M | 5157 - 5245 | 80.1 |
| | 5731 - 5844 | 80.1 |

Table 2-2. Measured Duty Cycles

1. Additionally, this device is sold together in the same package as a system with FCC ID: BCG-A2698 and FCC ID: BCG-A2700. Co-Tx configurations were tested, and the worst case has been included in the RF BTLE report.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 5 of 50 |



2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

| Frequency [GHz] | Antenna Gain (dBi) |
|-----------------|--------------------|
| 5.157 – 5.245 | -3.4 |
| 5.731 – 5.844 | -6.0 |

Table 2-3. Highest Antenna Gain

See Appendix A for full antenna specs sheet.

2.4 Test Support Equipment

| 1 | Apple Macbook w/ AD/DC Adapter | Model: | A2141 | S/N: | C02DV7VGMD6T |
|---|--|--------|-------|------|-------------------|
| | | Model: | A2164 | S/N: | N/A |
| 2 | Apple Airpod Charging Case Apple Airpod (Right) | Model: | A2700 | S/N: | GHQ7JH6VWH |
| | | Model: | A2698 | S/N: | HM6HQ1KT18JP |
| 3 | Apple Lightning Cable W/ AD/DC Adapter | Model: | N/A | S/N: | N/A |
| | | Model: | A2305 | S/N: | C4H0106004QPF4FAD |
| 4 | HAM UART Cable | Model: | N/A | S/N: | F7514HMN0031983 |

Table 2-4. Test Support Equipment List

| | | | | |
|---|---|---------------------------------------|--------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 6 of 50 | |

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, and 7.5 for antenna port conducted emissions test setups.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated.

- EUT charged by charging case and powered by AC/DC adaptor with lightning cable.
- EUT charged by charging case and powered by host PC with lightning cable.

2.6 Software and Firmware

The test was conducted with firmware version 5A335 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 7 of 50 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....**None**

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

| | | | | |
|---|---|------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 8 of 50 |

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | | |
|---|---|------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 9 of 50 |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

| FCC ID: BCG-A2699 | e element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
|---|-------------------------------------|------------------------------|---------------------------------------|-----------------------------------|
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 10 of 50 |

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|-------------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.77 |
| Line Conducted Disturbance | 2.70 |
| Radiated Disturbance (<30MHz) | 4.38 |
| Radiated Disturbance (30MHz - 1GHz) | 4.75 |
| Radiated Disturbance (1 - 18GHz) | 5.20 |
| Radiated Disturbance (>18GHz) | 4.72 |

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 11 of 50 |

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial # |
|-----------------|-------------|---|------------|--------------|------------|------------|
| Agilent | N9020A | MXA Signal Analyzer | 4/26/2022 | Annual | 4/26/2023 | MY56470202 |
| Anritsu | MA2411B | Pulse Power Sensor | 11/30/2021 | Annual | 11/30/2022 | 1726261 |
| Anritsu | MA2411B | Pulse Power Sensor | 5/19/2022 | Annual | 5/19/2023 | 1911106 |
| Anritsu | ML2495A | Power Meter | 12/6/2021 | Annual | 12/6/2022 | 1039008 |
| Anritsu | ML2496A | Power Meter | 11/29/2021 | Annual | 11/29/2022 | 1840005 |
| ETS-Lindgren | 3117 | Double Ridged Guide Horn Antenna (1-18 GHz) | 5/24/2022 | Annual | 5/24/2023 | 240049 |
| ETS-Lindgren | 3142E | Biconilog Antenna - (30MHz-6GHz) | 10/21/2021 | Annual | 10/21/2022 | 208204 |
| Rohde & Schwarz | ENV216 | Two-Line V-Network | 1/14/2022 | Annual | 1/14/2023 | 101364 |
| Rohde & Schwarz | FVA3044 | Signal Analyzer 44GHz | 5/12/2022 | Annual | 5/12/2023 | 101098 |
| Rohde & Schwarz | FSW43 | Signal and Spectrum Analyzer 2Hz to 43GHz | 5/19/2022 | Annual | 5/19/2023 | 104093 |
| Rohde & Schwarz | FSW67 | Signal and Spectrum Analyzer (2Hz-67GHz) | 4/21/2022 | Annual | 4/21/2023 | 101366 |
| Rohde & Schwarz | TS-PR18 | Pre Amplifier 1-18GHz | 1/6/2022 | Annual | 1/6/2023 | 101639 |
| Rohde & Schwarz | TS-PR1 | Preamplifier - Antenna System; 30MHz - 1GHz | 4/18/2022 | Annual | 4/18/2023 | 102081 |
| Rohde & Schwarz | 180-442A-KF | Horn (Small) | 1/19/2022 | Annual | 1/19/2023 | T058701-2 |
| Rohde & Schwarz | TS-PR1840 | Pre Amplifier 18-40GHz | 4/18/2022 | Annual | 4/18/2023 | 100050 |
| Rohde & Schwarz | HFH2-Z2 | Loop Antenna | 4/3/2022 | Annual | 4/3/2023 | 100546 |

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 12 of 50 |

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A2699
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|--------------------------|---|--|-------------------|-------------|------------------|
| 15.407 | 26dB Bandwidth | N/A | CONDUCTED | N/A | Section 7.2 |
| 15.407(e) | 6dB Bandwidth | >500kHz(5725-5850MHz) | | PASS | Section 7.3 |
| 2.1049 | Occupied Bandwidth | N/A | | N/A | Section 7.2, 7.3 |
| 15.407 (a.1.iv), (a.3) | Maximum Conducted Output Power | Maximum conducted powers must meet the limits detailed in 15.407 (a) | | PASS | Section 7.4 |
| 15.407 (a.1.iv), (a.3) | Maximum Power Spectral Density | Maximum power spectral density must meet the limits detailed in 15.407 (a) | RADIATED | PASS | Section 7.5 |
| 15.407(b.1), (4) | Undesirable Emissions | Undesirable emissions must meet the limits detailed in 15.407(b) | | PASS | Section 7.6 |
| 15.205, 15.407(b.1), (4) | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | | PASS | Section 7.6 |
| 15.207 | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 limits | AC LINE CONDUCTED | PASS | Section 7.8 |

Table 7-1. Summary of Test Results

Notes:

1. All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 7.0.
5. For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.2.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 13 of 50 |

7.2 26dB & 99% Bandwidth Measurement – LE

[\\$2.1049; \\$15.407](#)

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Subclause 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 14 of 50 |

26dB & 99% Bandwidth Measurements


| | Frequency [MHz] | Mode | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] | Measured 26dB Bandwidth [MHz] |
|--------|--------------------|------|---------------------|--|-------------------------------------|
| Band 1 | 5157 | LE2M | 2 | 2.1088 | 2.6070 |
| | 5201 | LE2M | 2 | 2.1082 | 2.6140 |
| | 5245 | LE2M | 2 | 2.1120 | 2.6070 |

Table 7-2. Conducted BW Measurements

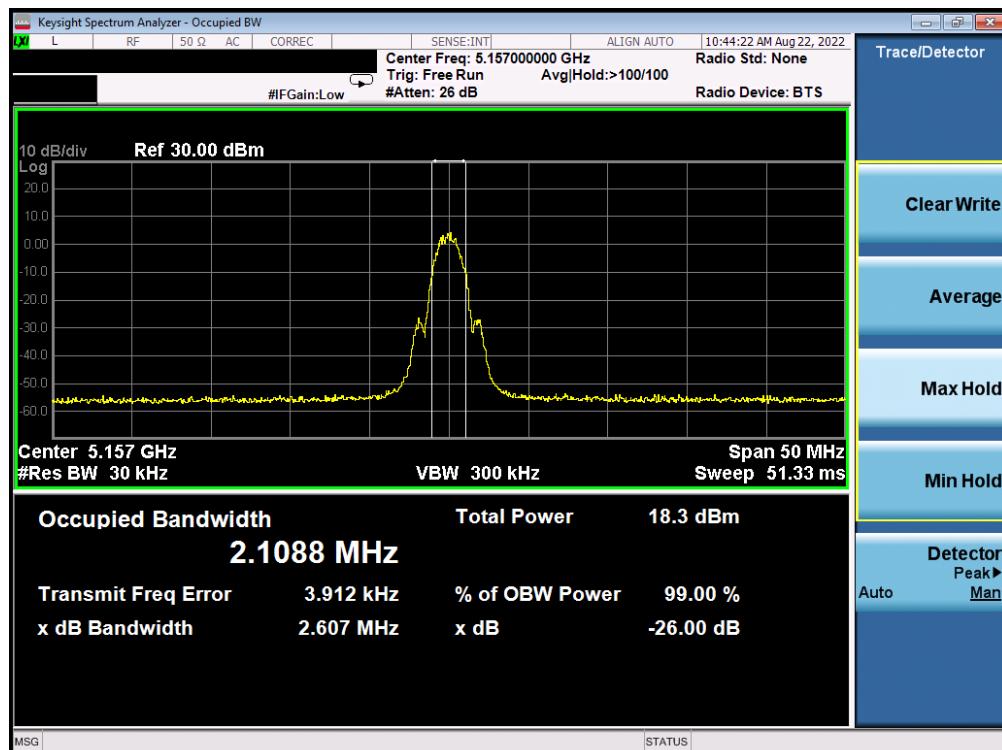


Plot 7-1. 26dB BW & 99% OBW (LE2M, 5157MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 15 of 50 |

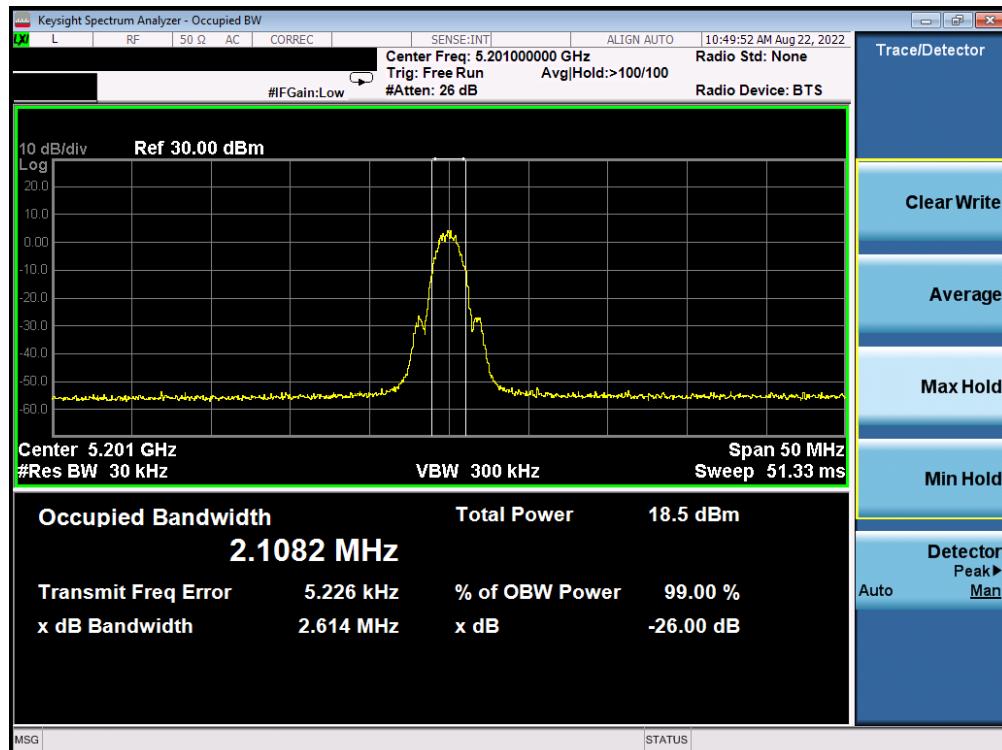

Plot 7-2. 26dB BW & 99% OBW (LE2M, 5201MHz)

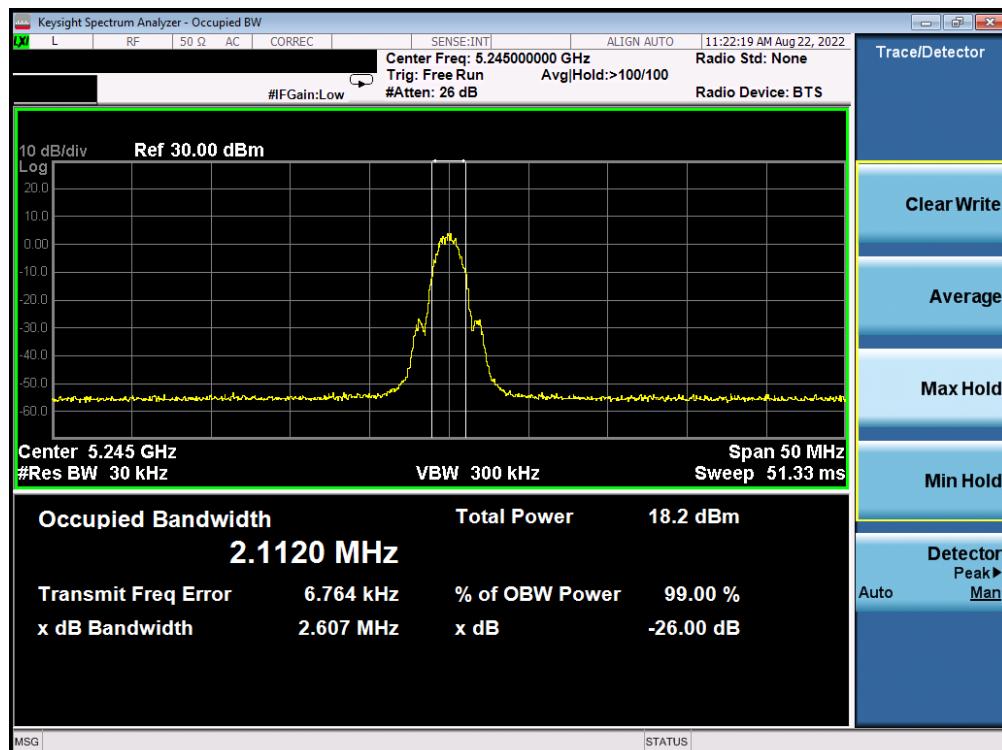

Plot 7-3. 26dB BW & 99% OBW (LE2M, 5245MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 16 of 50 |

7.3 6dB & 99% Bandwidth Measurement – LE

§2.1049; §15.407 (e)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Subclause 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 17 of 50 |

6dB & 99% Bandwidth Measurements


| | Frequency [MHz] | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass / Fail |
|--------|--------------------|---------------------|--|------------------------------------|-----------------------------------|-------------|
| Band 3 | 5731 | 2 | 2.0850 | 1.1970 | 0.50 | Pass |
| | 5788 | 2 | 2.0869 | 1.2200 | 0.50 | Pass |
| | 5844 | 2 | 2.0858 | 1.1930 | 0.50 | Pass |

Table 7-3. Conducted BW Measurements

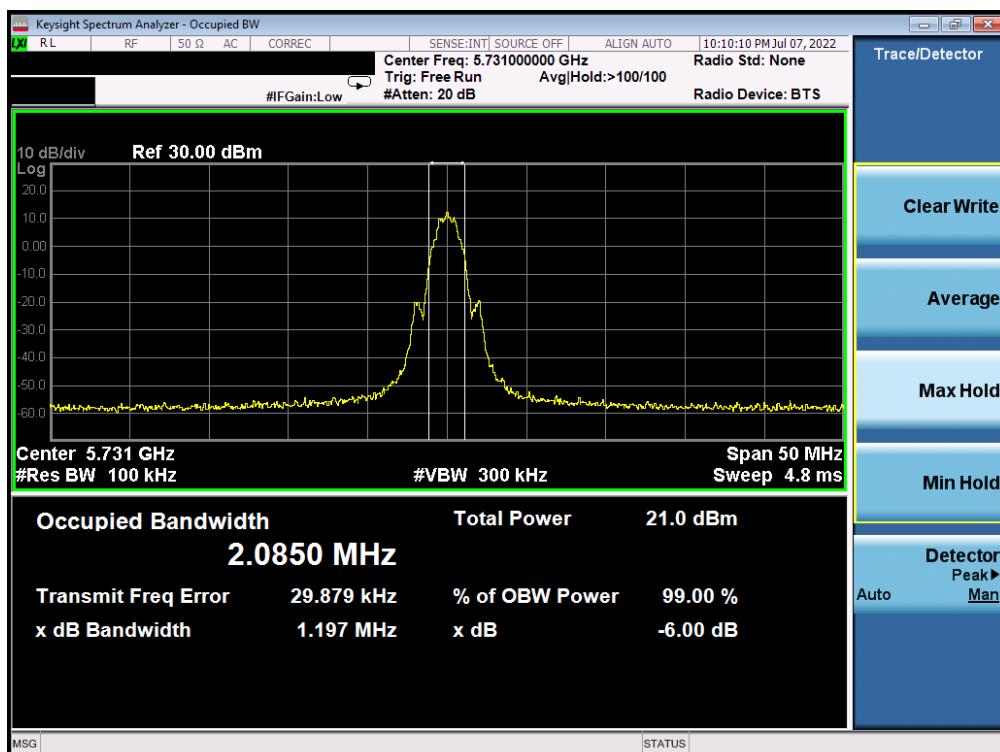


Plot 7-4. 6dB BW & 99% OBW (LE2M, 5731MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 18 of 50 |

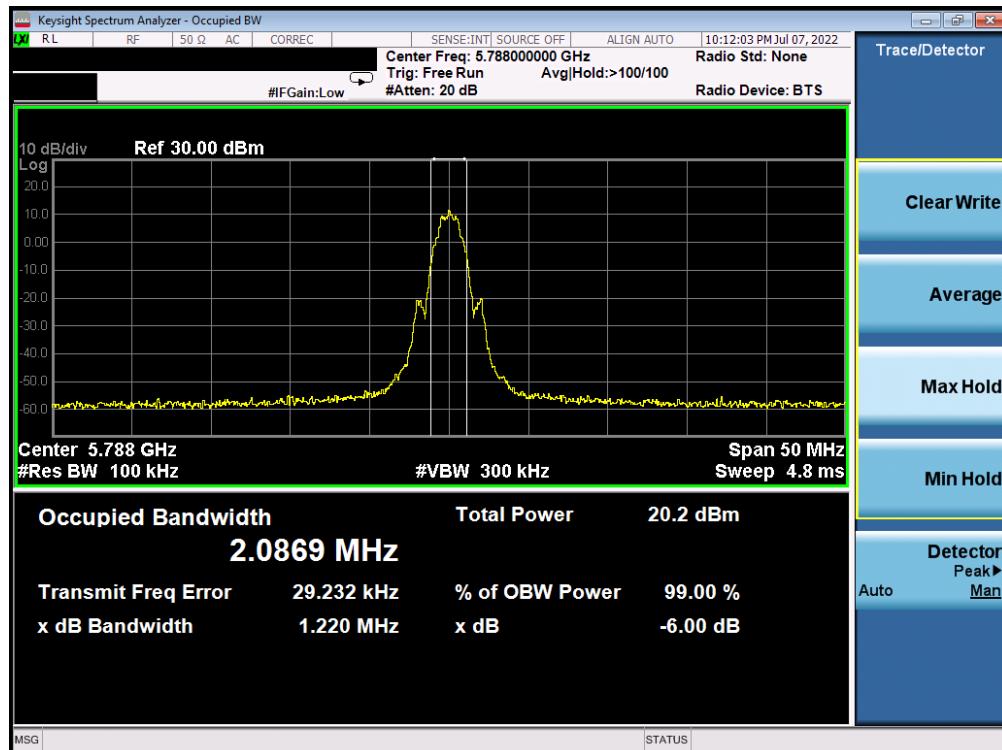

Plot 7-5. 6dB BW & 99% OBW (LE2M, 5788MHz)

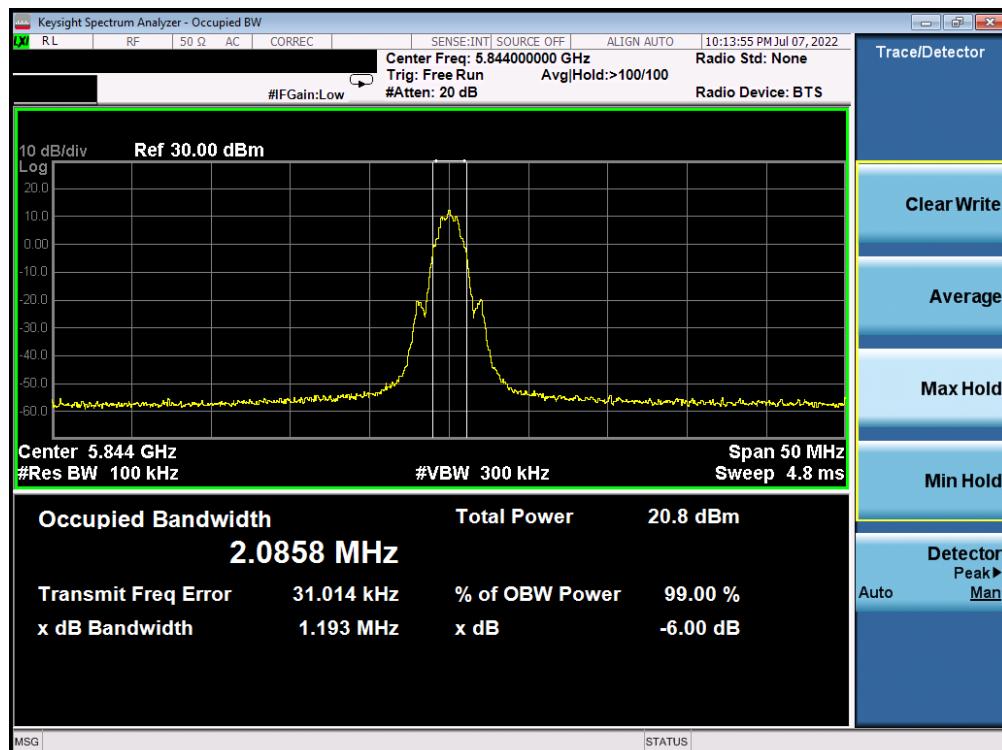

Plot 7-6. 6dB BW & 99% OBW (LE2M, 5844MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 19 of 50 |

7.4 Conducted Output Power – LE

§15.407(a.1.iv) §15.407(a.3)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 99% OBW per 26dB BW is per FCC 15.407.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.3.2 Method PM-G
 KDB 789033 D02 v02r01 – Section E)3(b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

| | | | | |
|---|--|------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 20 of 50 |



Conducted Output Power Measurements

| Freq [MHz] | Detector | Mode | Conducted Power [dBm] | Conducted Power Limit [dBm] | Conducted Power Margin [dB] |
|------------|----------|------|-----------------------|-----------------------------|-----------------------------|
| 5157 | AVG | LE2M | 9.94 | 23.98 | -14.04 |
| 5201 | AVG | LE2M | 9.99 | 23.98 | -13.99 |
| 5245 | AVG | LE2M | 10.00 | 23.98 | -13.98 |
| 5731 | AVG | LE2M | 13.39 | 30.00 | -16.61 |
| 5788 | AVG | LE2M | 13.30 | 30.00 | -16.70 |
| 5844 | AVG | LE2M | 13.22 | 30.00 | -16.78 |

Table 7-4. FCC Maximum Conducted Output Power

| | | | | |
|---|---------------------------------------|------------------------------|--|-----------------------------------|
| FCC ID: BCG-A2699 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | |

7.5 Maximum Power Spectral Density – LE

§15.407(a.1.iv) §15.407(a.3)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz band, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.2.2

KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None

| | | | | |
|---|--|------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 22 of 50 |



Power Spectral Density Measurements


| | Frequency [MHz] | Mode | Data Rate [Mbps] | Measured Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|------|------------------|----------------------------------|-----------------------------|-------------|
| Band 1 | 5157 | LE2M | 2 | 6.72 | 11.0 | -4.28 |
| | 5201 | LE2M | 2 | 7.72 | 11.0 | -3.28 |
| | 5245 | LE2M | 2 | 7.50 | 11.0 | -3.50 |

Table 7-5. Power Spectral Density Measurements


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 23 of 50 |

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

V 10.5 12/15/2021

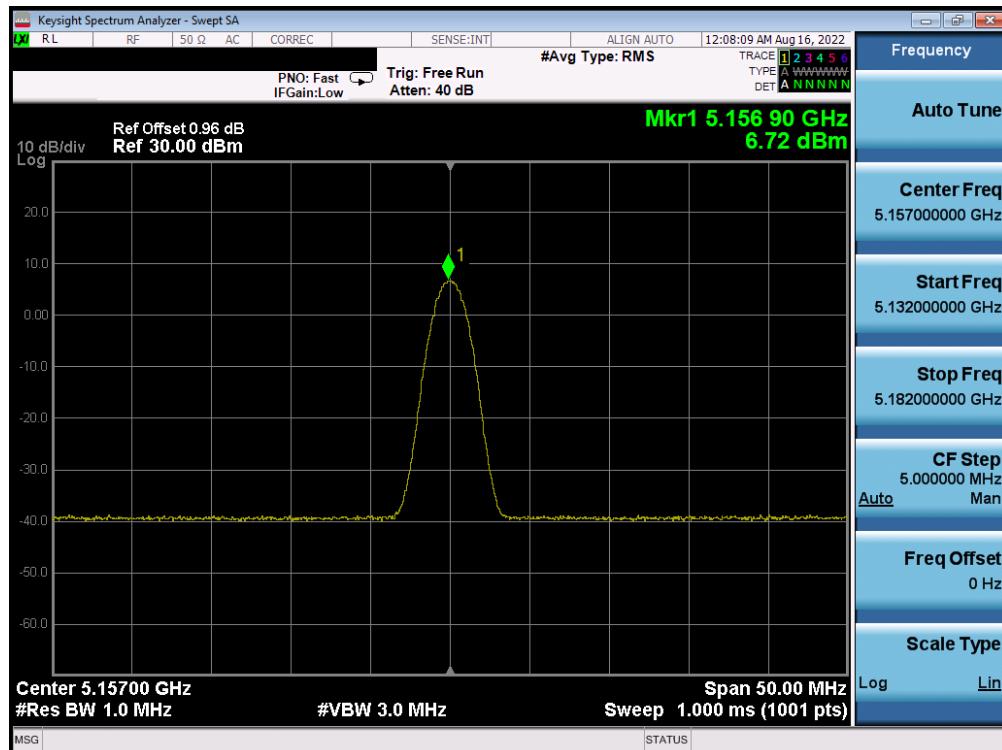


Plot 7-7. PSD (LE2M, 5157MHz)

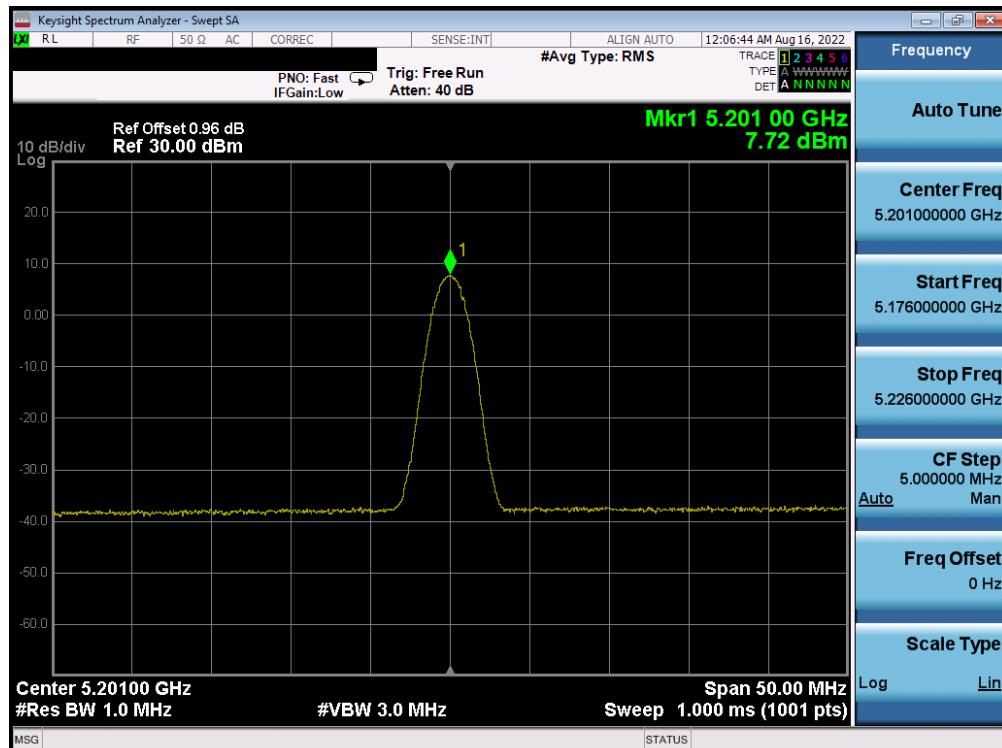

Plot 7-8. PSD (LE2M, 5201MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 24 of 50 |

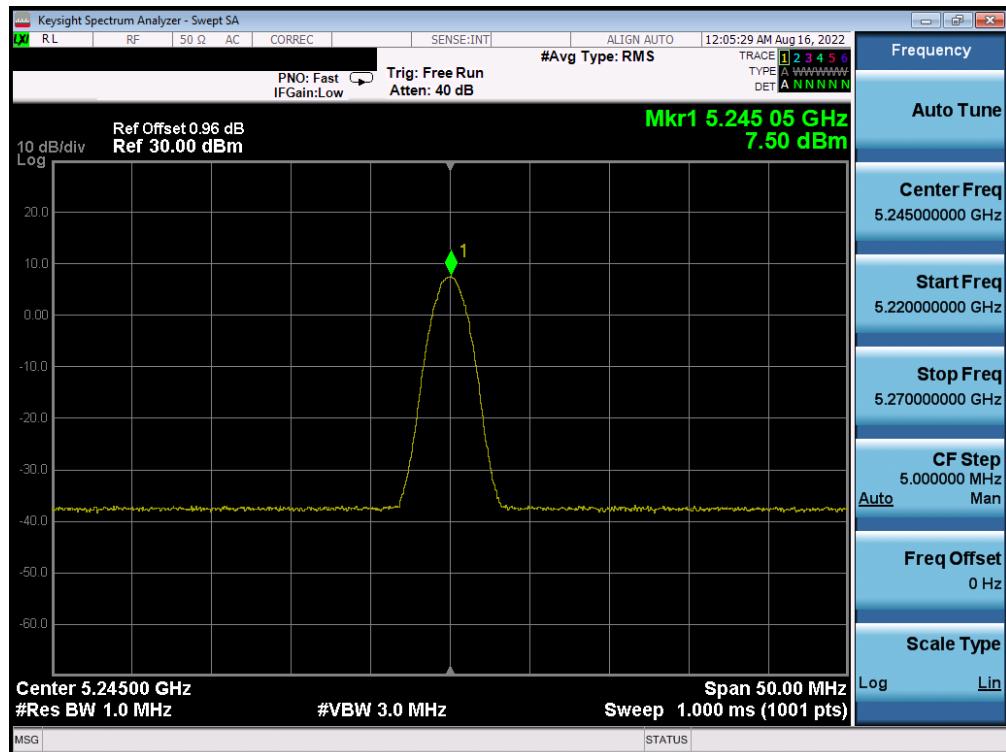


Plot 7-9. PSD (LE2M, 5245MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 25 of 50 |


| | Frequency [MHz] | Mode | Data Rate [Mbps] | Measured Power Density [dBm/500kHz] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] |
|--------|-----------------|------|------------------|-------------------------------------|--|-------------|
| Band 3 | 5731 | LE2M | 2 | 9.32 | 30.0 | -20.68 |
| | 5788 | LE2M | 2 | 9.11 | 30.0 | -20.89 |
| | 5844 | LE2M | 2 | 9.26 | 30.0 | -20.74 |

Table 7-6. Power Spectral Density Measurements

| | | | | |
|---|---|------------------------------|--|-----------------------------------|
| FCC ID: BCG-A2699 |  element MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 26 of 50 |

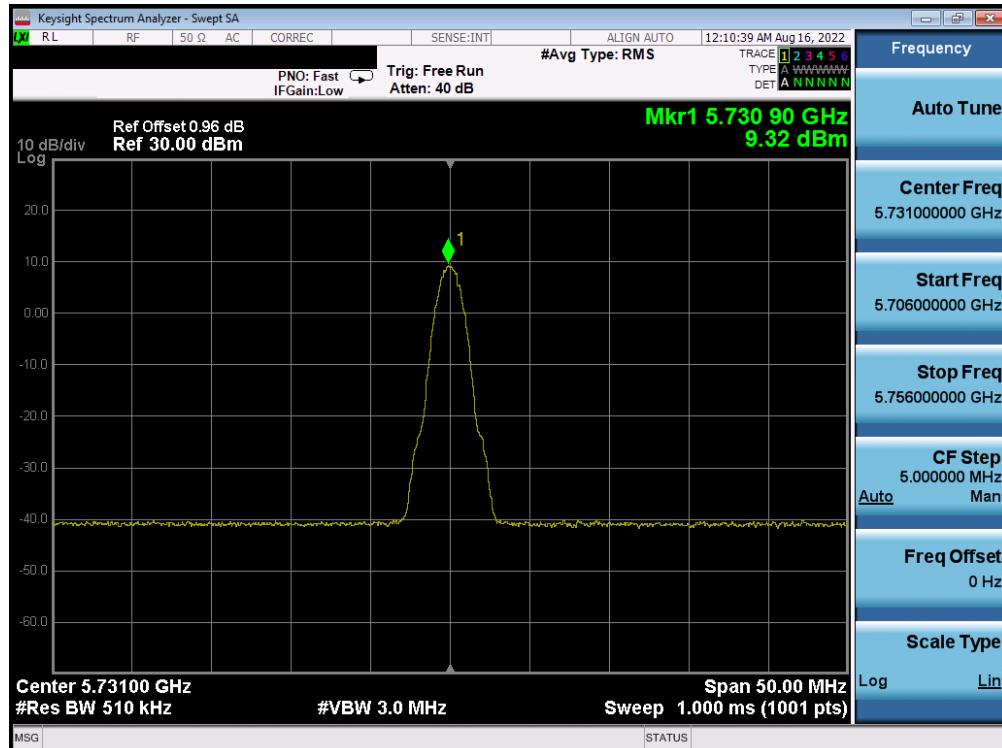


Plot 7-10. PSD (LE2M, 5731MHz)

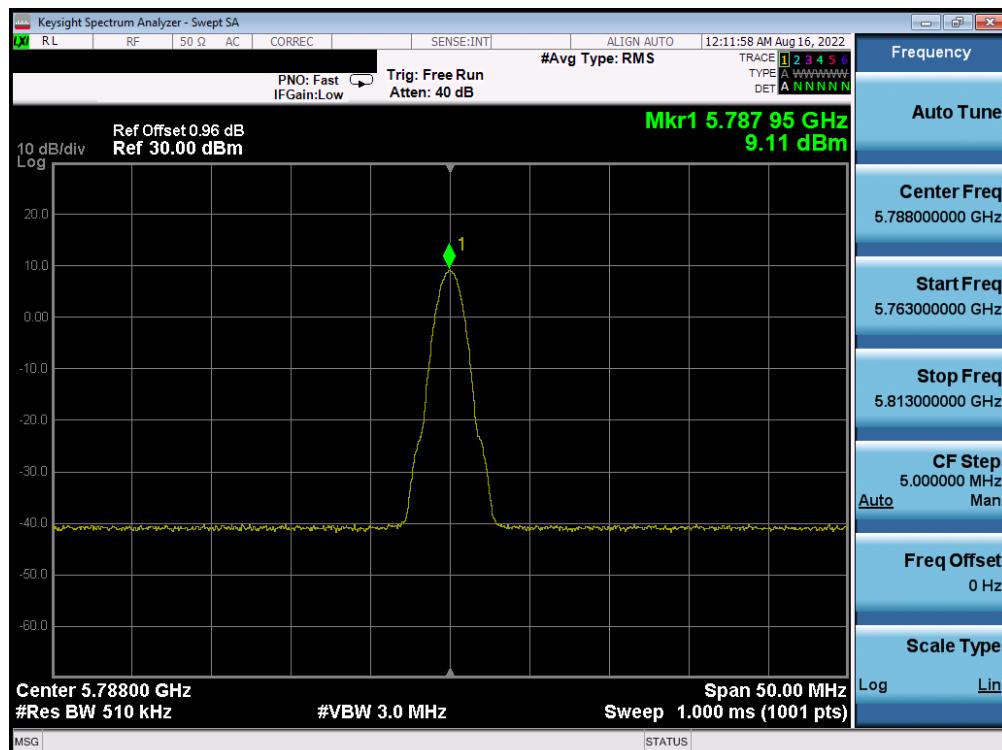

Plot 7-11. PSD (LE2M, 5788MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 27 of 50 |

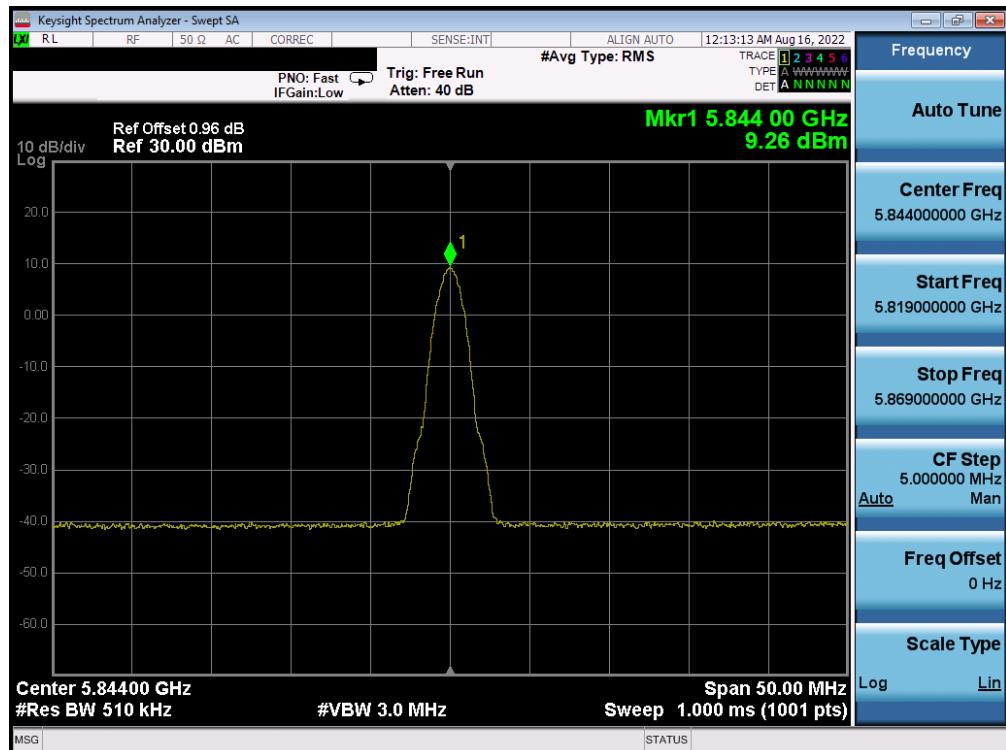

Plot 7-12. PSD (LE2M, 5844MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 28 of 50 |

7.6 Radiated Spurious Emission – Above 1GHz

§15.407(b) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels and data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725 – 5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-7 per Section 15.209.

| Frequency | Field Strength [μ V/m] | Measured Distance [Meters] |
|-----------------|--------------------------------|-------------------------------|
| Above 960.0 MHz | 500 | 3 |

Table 7-7. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Subclauses 12.7.7.2, 12.7.6, 12.7.5

KDB 789033 D02 v02r01 – Section G

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 29 of 50 |

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span}/\text{RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

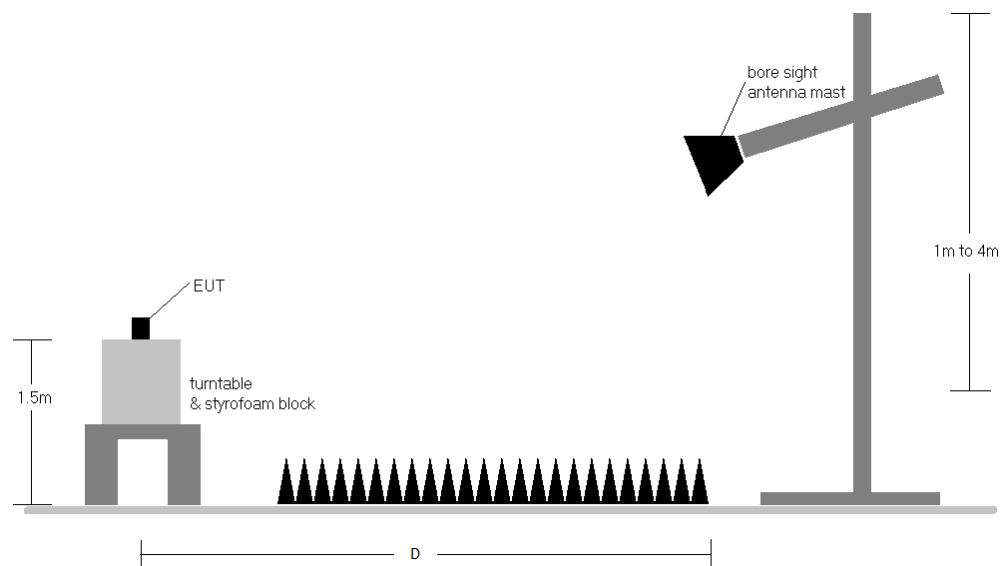


Figure 7-5. Test Instrument & Measurement Setup

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 30 of 50 |

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-7.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-7. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation have been tested on the unit and only worst case configuration is reported.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.2 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 31 of 50 |

7.6.1 Radiated Spurious Emission

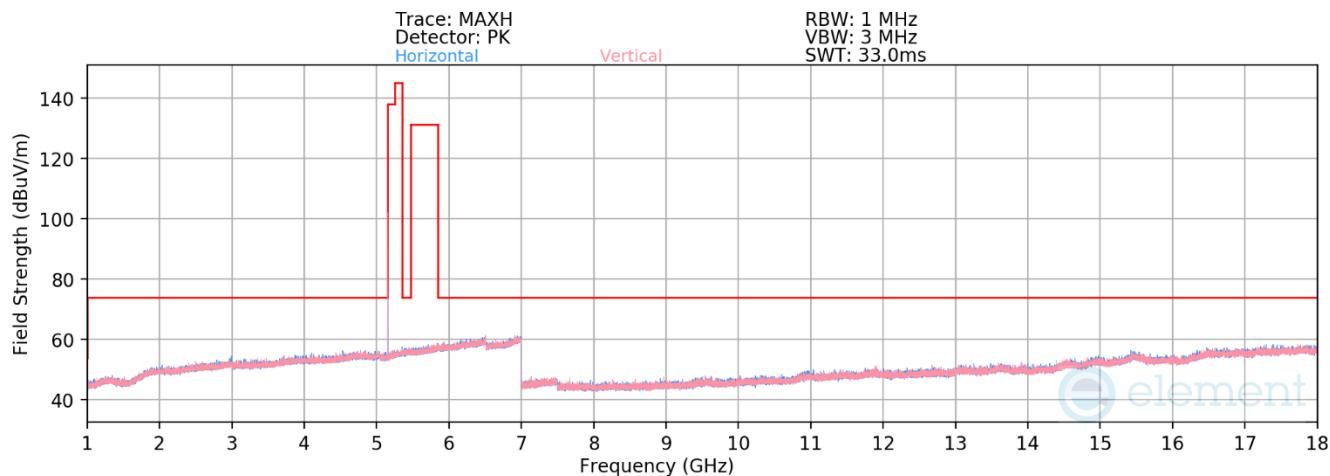


Plot 7-13. Radiated Spurious Emissions 1-18GHz (LE2M – 5157MHz)

Mode: LE2M
 Data Rate: 2Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5157MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Duty Cycle Correction [dB] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|----------------------------|-------------------------------|----------------------|-------------|
| 10314.00 | Peak | H | 278 | 242 | -65.87 | 10.34 | 0.00 | 51.47 | 68.23 | -16.76 |
| * 15471.00 | Avg | H | 257 | 328 | -82.58 | 18.64 | 0.96 | 44.02 | 53.98 | -9.96 |
| * 15471.00 | Peak | H | 257 | 328 | -71.37 | 18.64 | 0.00 | 54.27 | 73.98 | -19.71 |

Table 7-8. Radiated Measurements

| | | | | |
|---|-------------------------------------|------------------------------|---------------|-----------------------------------|
| FCC ID: BCG-A2699 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 32 of 50 | |

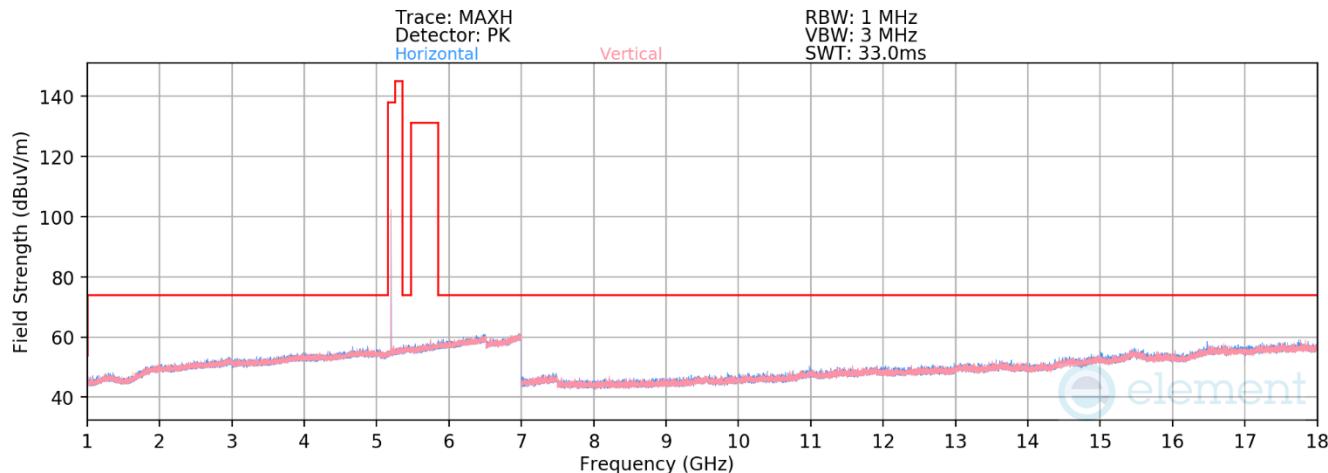


Plot 7-14. Radiated Spurious Emissions 1-18GHz (LE2M – 5201MHz)

Mode: LE2M
 Data Rate: 2Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5201MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Duty Cycle Correction [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|----------------------------|-------------------------|----------------|-------------|
| 10402.00 | Peak | H | 271 | 242 | -67.41 | 10.82 | 0.00 | 50.41 | 68.23 | -17.82 |
| * 15603.00 | Avg | H | 257 | 304 | -81.94 | 18.04 | 0.96 | 44.06 | 53.98 | -9.92 |
| * 15603.00 | Peak | H | 257 | 304 | -71.00 | 18.04 | 0.00 | 53.75 | 73.98 | -20.23 |

Table 7-9. Radiated Measurements

| | | | | |
|---|-------------------------------------|------------------------------|--|-----------------------------------|
| FCC ID: BCG-A2699 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | |

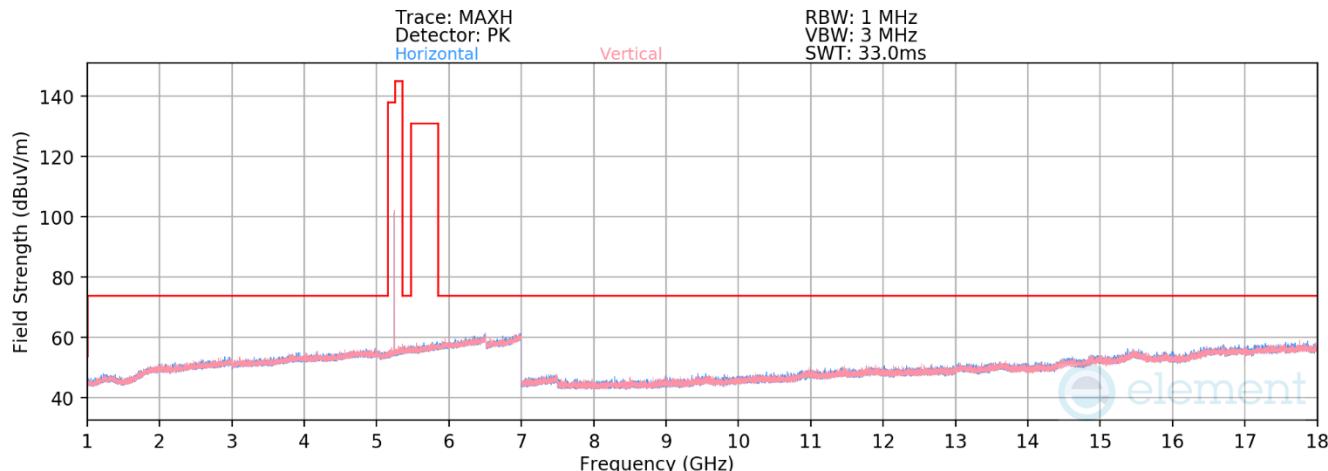

Plot 7-15. Radiated Spurious Emissions 1-18GHz (LE2M – 5245MHz)


Mode: LE2M
 Data Rate: 2Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5245MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Duty Cycle Correction [dB] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|----------------------------|-------------------------------|----------------------|-------------|
| 10490.00 | Peak | H | 271 | 256 | -67.91 | 11.03 | 0.00 | 50.12 | 68.23 | -18.11 |
| * 15735.00 | Avg | H | 312 | 319 | -81.23 | 17.33 | 0.96 | 44.06 | 53.98 | -9.92 |
| * 15735.00 | Peak | H | 312 | 319 | -70.38 | 17.33 | 0.00 | 53.95 | 73.98 | -20.03 |


Table 7-10. Radiated Measurements

| | | | | |
|---|-------------------------------------|------------------------------|--|-----------------------------------|
| FCC ID: BCG-A2699 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | |

Radiated Spurious Emission (Above 18GHz)

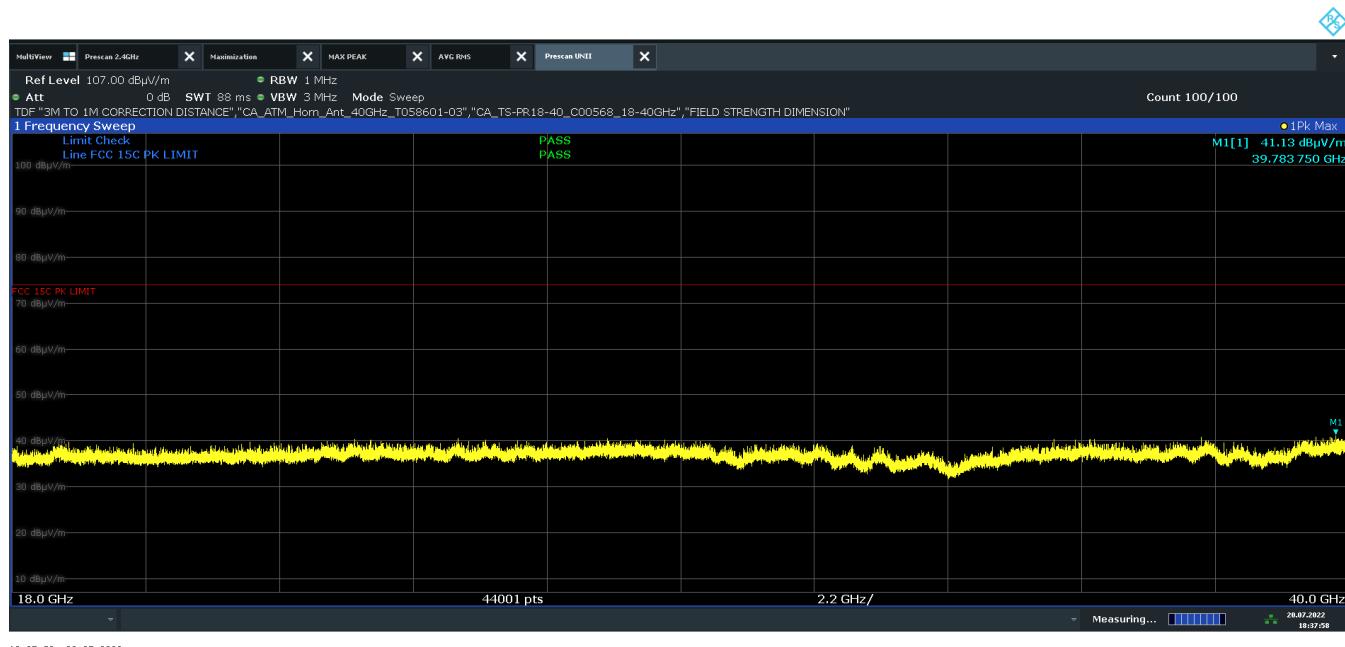


Plot 7-16. Radiated Spurious Emissions Above 18GHz (LE2M – 5245MHz Pol. H)

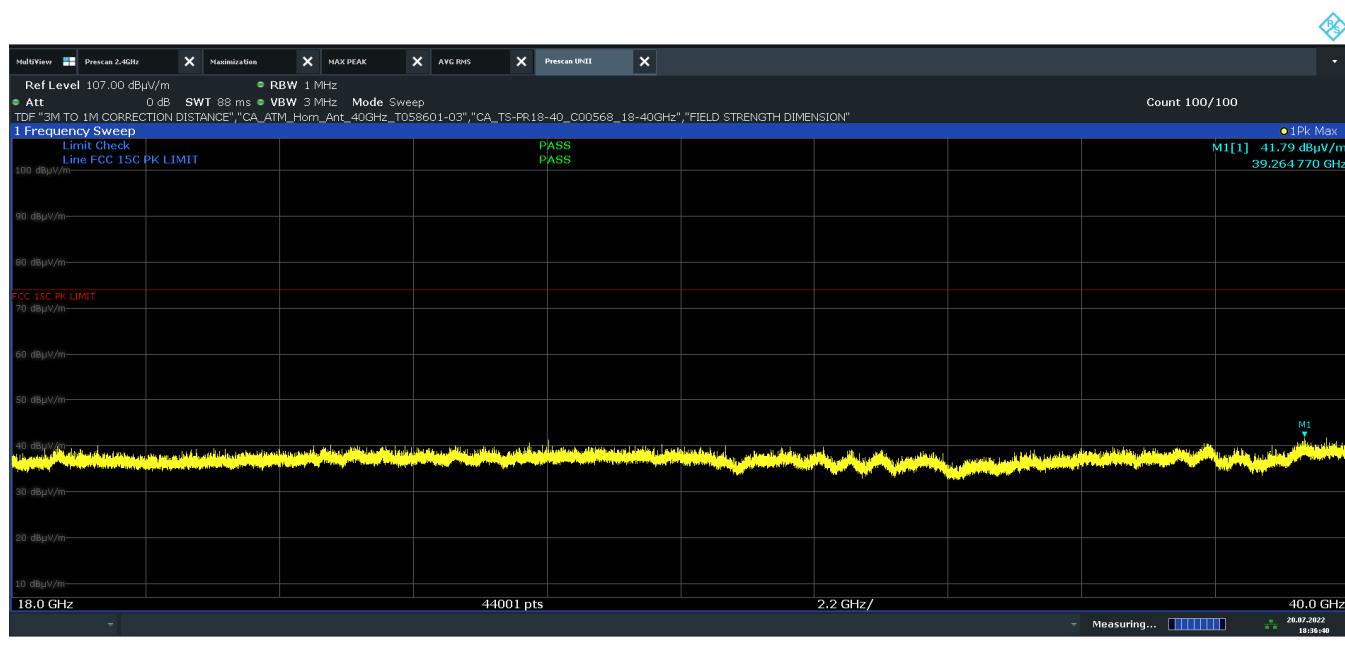

Plot 7-17. Radiated Spurious Emissions Above 18GHz (LE2M – 5245MHz Pol. V)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 35 of 50 |

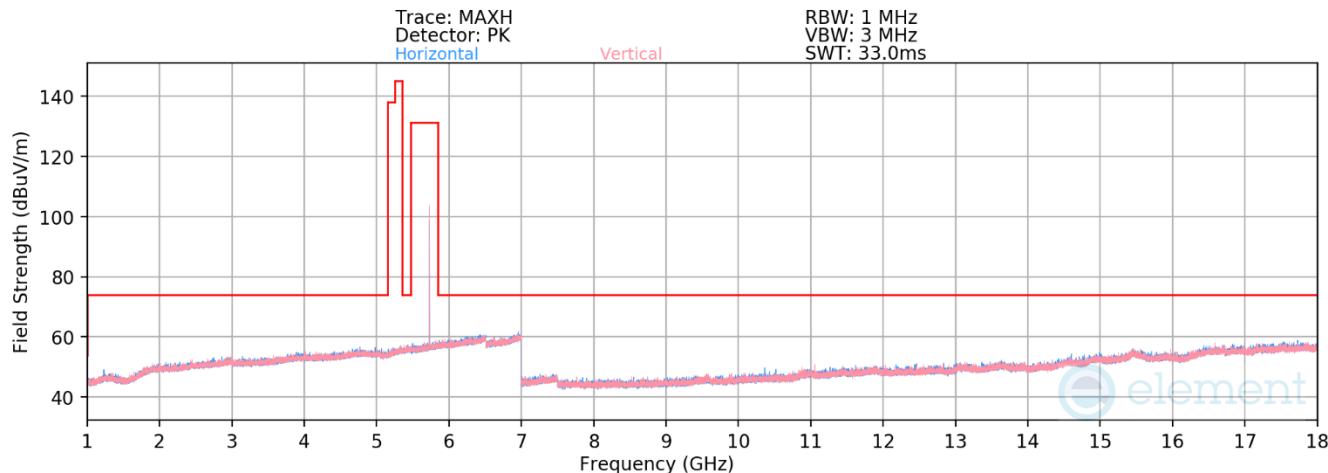


Plot 7-18. Radiated Spurious Emissions 1-18GHz (LE2M – 5731MHz)

Mode: LE2M
 Data Rate: 2Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5731MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| * 11462.00 | Avg | H | - | - | -81.68 | 12.45 | 37.77 | 53.98 | -16.21 |
| * 11462.00 | Peak | H | - | - | -70.34 | 12.45 | 49.11 | 73.98 | -24.87 |
| 17193.00 | Peak | H | 208 | 206 | -71.70 | 21.74 | 57.04 | 68.23 | -11.19 |

Table 7-11. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 36 of 50 |

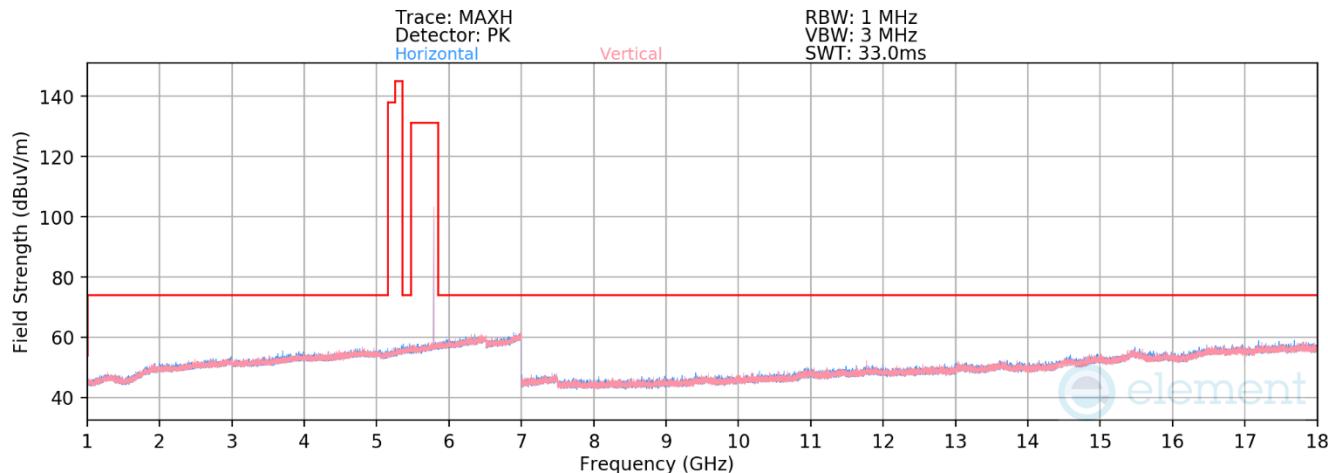


Plot 7-19. Radiated Spurious Emissions 1-18GHz (LE2M – 5788MHz)

Mode: LE2M
 Data Rate: 2Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5788MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| * 11576.00 | Avg | H | - | - | -81.72 | 12.45 | 37.73 | 53.98 | -16.25 |
| * 11576.00 | Peak | H | - | - | -70.27 | 12.45 | 49.18 | 73.98 | -24.80 |
| 17364.00 | Peak | H | - | - | -71.94 | 21.74 | 56.80 | 68.23 | -11.43 |

Table 7-12. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 37 of 50 |

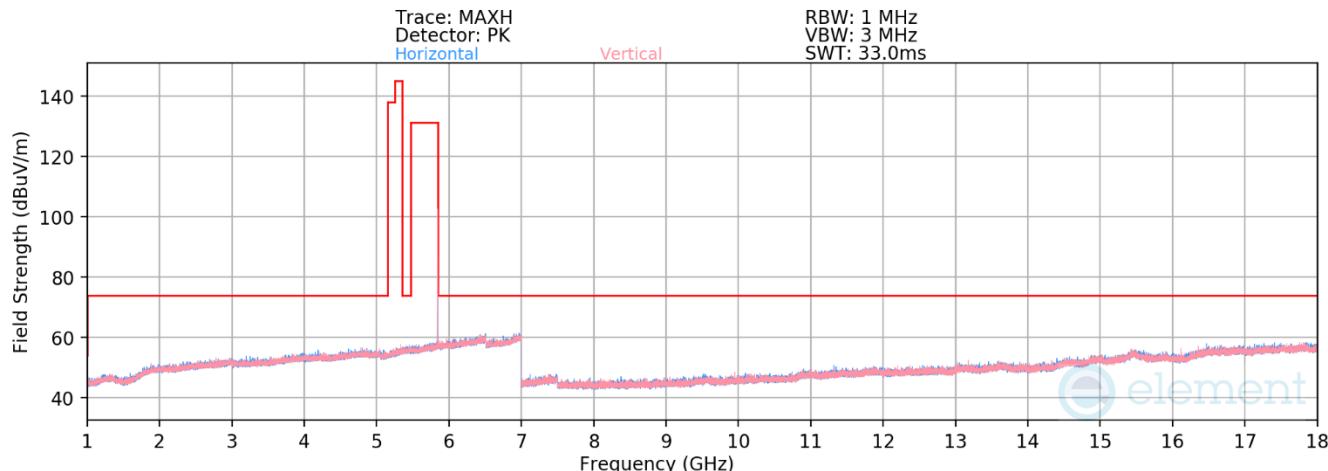

Plot 7-20. Radiated Spurious Emissions 1-18GHz (LE2M – 5844MHz)

Mode: LE2M
 Data Rate: 2Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5844MHz

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Duty Cycle Correction [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|----------------------------|-------------------------|----------------|-------------|
| * 11688.00 | Avg | H | 250 | 316 | -81.11 | 13.43 | 0.96 | 40.28 | 53.98 | -13.70 |
| * 11688.00 | Peak | H | 250 | 316 | -69.81 | 12.45 | 0.00 | 49.64 | 73.98 | -24.34 |
| * 17532.00 | Peak | V | 201 | 57 | -72.12 | 22.69 | 0.00 | 57.57 | 68.23 | -10.66 |

Table 7-13. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 38 of 50 |


7.6.2 Radiated Band Edge Measurements

§15.407(b.1) §15.205 §15.209

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


Mode: LE2M
 Measurement Distance: 3 Meters
 Operating Frequency: 5157MHz

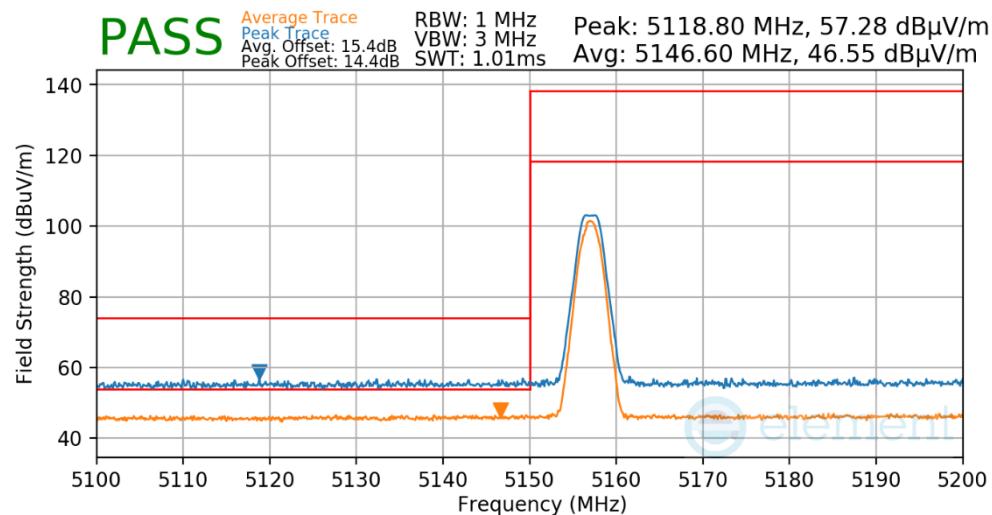

Plot 7-21. Radiated Lower Band Edge Measurement


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 39 of 50 |

Mode: LE2M
 Measurement Distance: 3 Meters
 Operating Frequency: 5731MHz

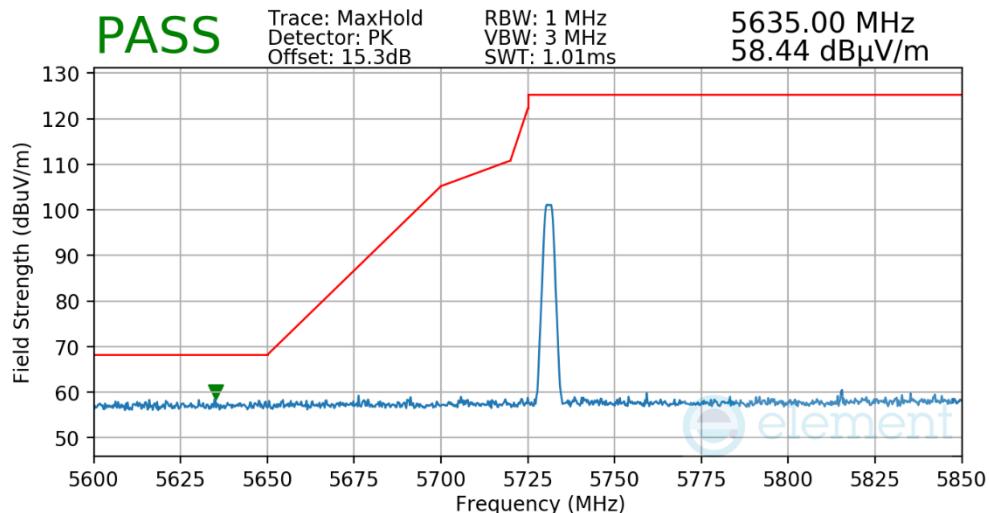

Plot 7-22. Radiated Lower Band Edge Measurement

Mode: LE2M
 Measurement Distance: 3 Meters
 Operating Frequency: 5844MHz

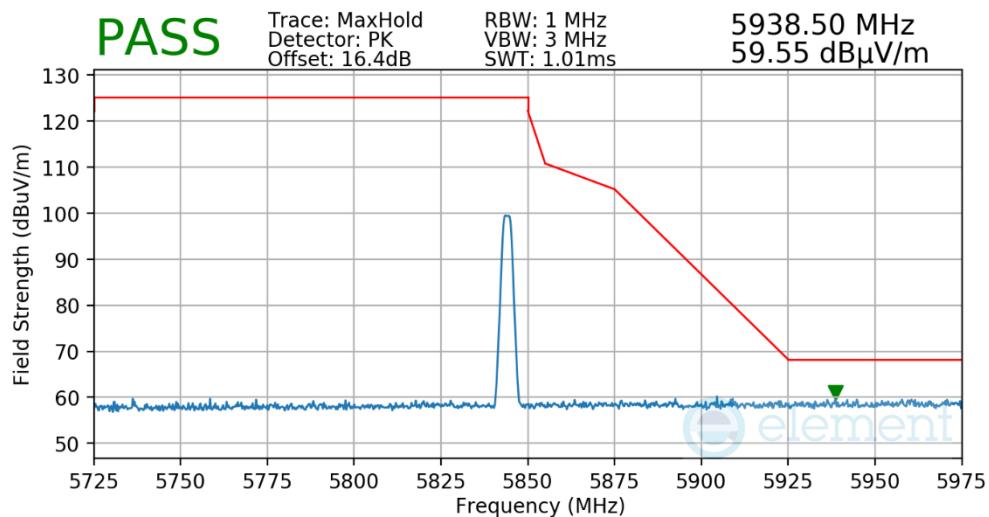

Plot 7-23. Radiated Upper Band Edge Measurement

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 40 of 50 |

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-14 per Section 15.209.

| Frequency | Field Strength [μ V/m] | Measured Distance [Meters] |
|-------------------|--------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 7-14. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 41 of 50 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

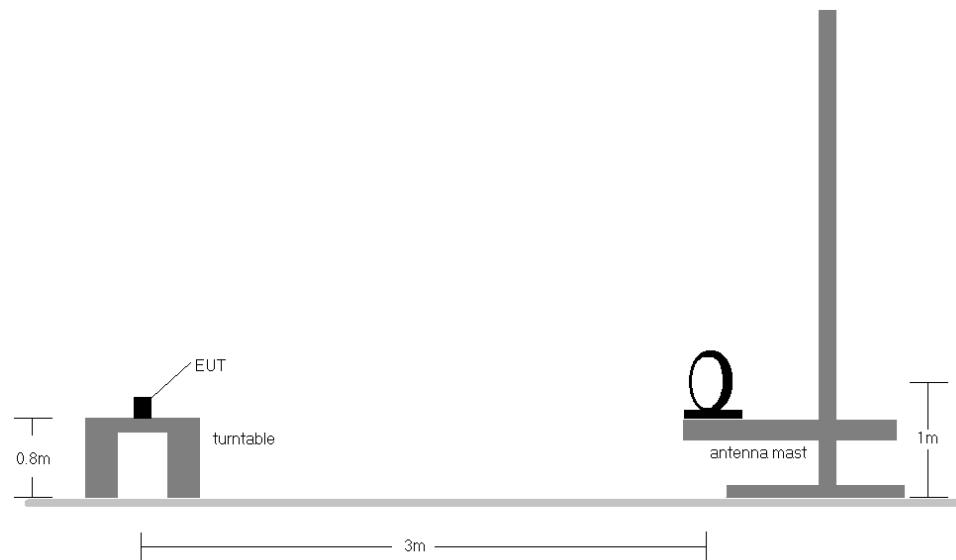


Figure 7-6. Radiated Test Setup < 30MHz

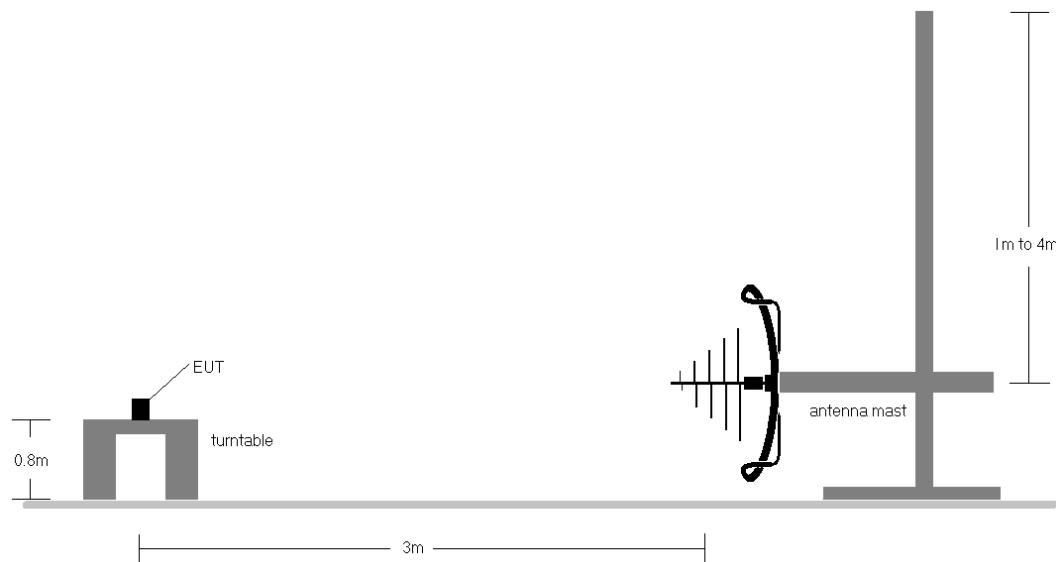


Figure 7-7. Radiated Test Setup < 1GHz

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 42 of 50 |

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-14.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulations have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with lightning cable.
 - b. EUT charged by charging case and powered by host PC with lightning cable.

Sample Calculations


Determining Spurious Emissions Levels

- o Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- o AFCL $[\text{dB/m}]$ = Antenna Factor $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- o Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 43 of 50 |

Radiated Spurious Emissions (Below 1GHz)

§15.209

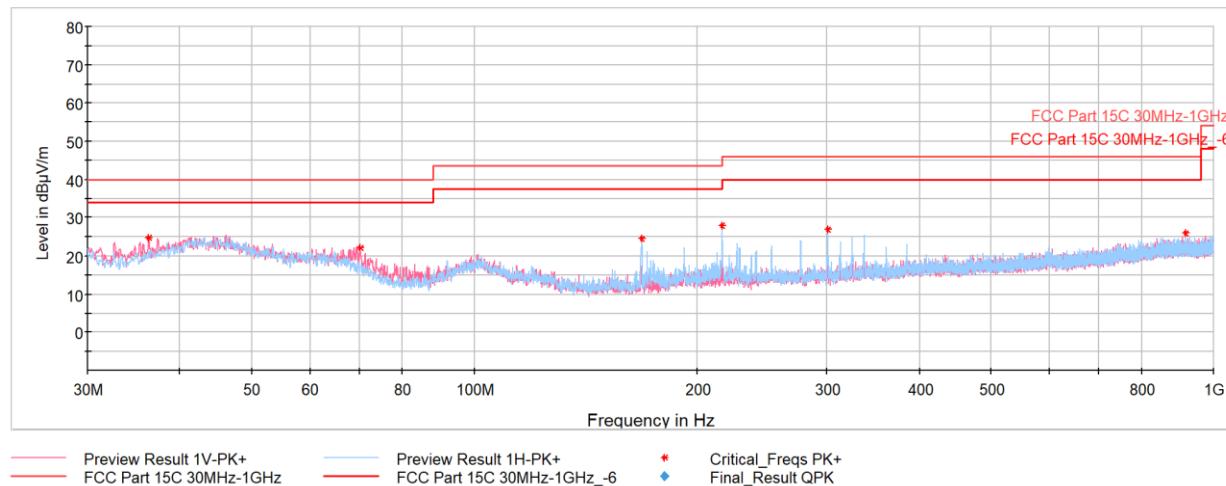

Plot 7-24. RSE 30MHz - 1GHz (LE2M – 5245MHz), with AC/DC Adapter and lightning cable

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 36.31 | Max Peak | V | 100 | 308 | -63.79 | -18.38 | 24.83 | 40.00 | -15.17 |
| 70.21 | Max Peak | V | 200 | 195 | -64.54 | -20.34 | 22.12 | 40.00 | -17.88 |
| 168.27 | Max Peak | H | 100 | 194 | -62.20 | -20.33 | 24.47 | 43.52 | -19.05 |
| 216.34 | Max Peak | H | 100 | 194 | -61.35 | -17.72 | 27.93 | 46.02 | -18.09 |
| 300.58 | Max Peak | H | 100 | 240 | -64.80 | -15.36 | 26.84 | 46.02 | -19.18 |
| 915.76 | Max Peak | H | 300 | 321 | -76.95 | -4.01 | 26.04 | 46.02 | -19.98 |

Table 7-15. RSE 30MHz - 1GHz (LE2M – 5245MHz), with AC/DC Adapter and lightning cable

| | | | | | |
|---|---|------------------------------------|--|--|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | | |

7.8 AC Line Conducted Emissions Measurement

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

| Frequency of emission (MHz) | Conducted Limit (dB μ V) | |
|--------------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

Table 7-16. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 45 of 50 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


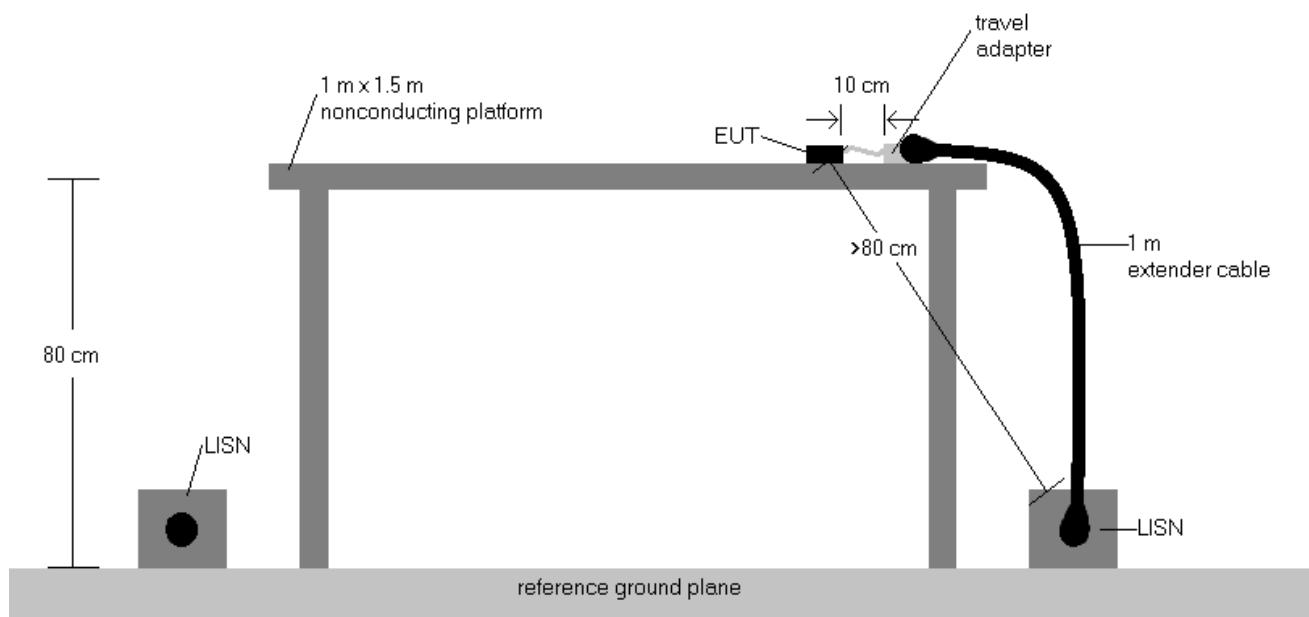


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with lightning cable.
 - b. EUT charged by charging case and powered by host PC with lightning cable.
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 46 of 50 |

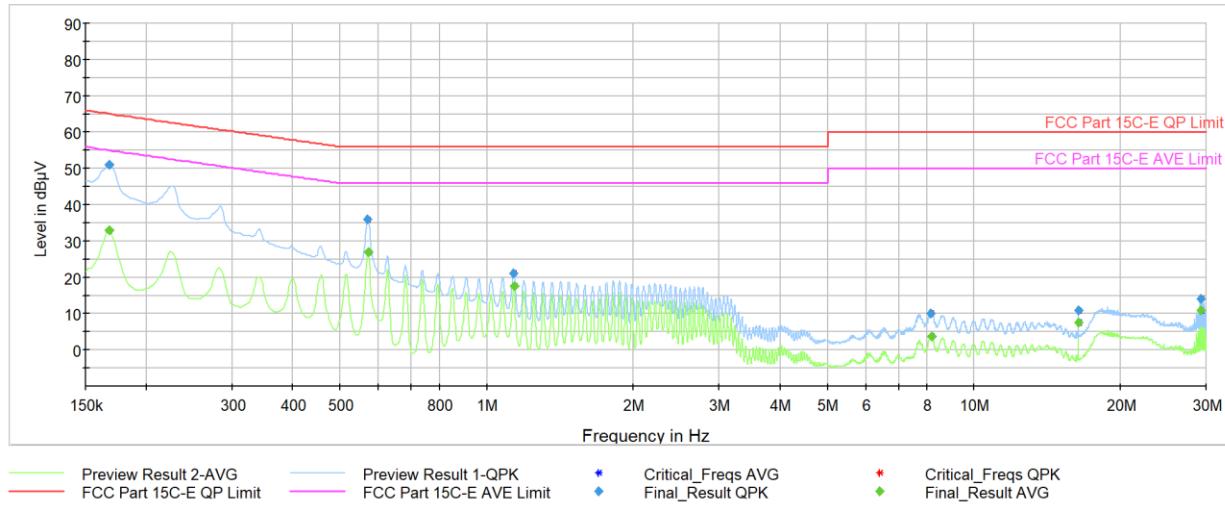


Plot 7-25. AC Line Conducted Plot (LE2M – 5245MHz) (L1) with host PC and lightning charger

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.168 | FINAL | — | 32.87 | 55.06 | -22.18 | L1 | GND |
| 0.168 | FINAL | 51.0 | — | 65.06 | -14.02 | L1 | GND |
| 0.569 | FINAL | 35.9 | — | 56.00 | -20.09 | L1 | GND |
| 0.571 | FINAL | — | 26.96 | 46.00 | -19.04 | L1 | GND |
| 1.136 | FINAL | 21.0 | — | 56.00 | -34.97 | L1 | GND |
| 1.138 | FINAL | — | 17.76 | 46.00 | -28.24 | L1 | GND |
| 8.169 | FINAL | 10.2 | — | 60.00 | -49.82 | L1 | GND |
| 8.171 | FINAL | — | 3.88 | 50.00 | -46.12 | L1 | GND |
| 16.370 | FINAL | 10.9 | — | 60.00 | -49.06 | L1 | GND |
| 16.370 | FINAL | — | 7.50 | 50.00 | -42.50 | L1 | GND |
| 29.171 | FINAL | — | 10.97 | 50.00 | -39.03 | L1 | GND |
| 29.171 | FINAL | 14.2 | — | 60.00 | -45.79 | L1 | GND |

Table 7-17. AC Line Conducted (LE2M – 5245MHz) (L1) with host PC and lightning charger

| | | | | |
|---|---|------------------------------------|--|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 47 of 50 |

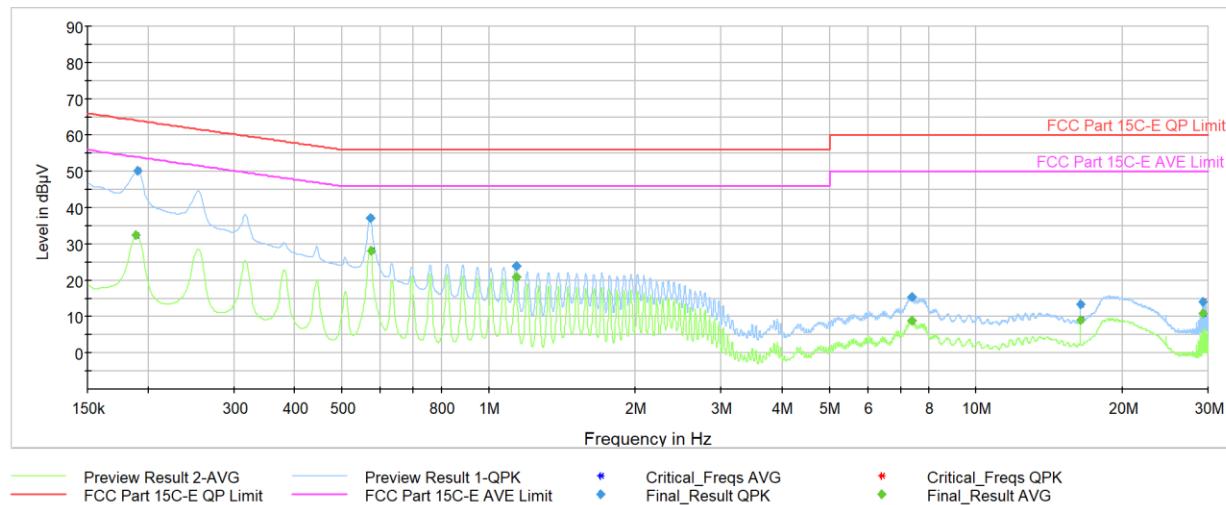

Plot 7-26. AC Line Conducted Plot (LE2M – 5245MHz) (N) with host PC and lightning charger

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.188 | FINAL | — | 32.56 | 54.11 | -21.55 | N | GND |
| 0.191 | FINAL | 50.4 | — | 64.02 | -13.67 | N | GND |
| 0.571 | FINAL | 37.1 | — | 56.00 | -18.86 | N | GND |
| 0.573 | FINAL | — | 28.22 | 46.00 | -17.78 | N | GND |
| 1.138 | FINAL | 24.0 | — | 56.00 | -31.99 | N | GND |
| 1.138 | FINAL | — | 20.94 | 46.00 | -25.06 | N | GND |
| 7.386 | FINAL | — | 8.92 | 50.00 | -41.08 | N | GND |
| 7.391 | FINAL | 15.3 | — | 60.00 | -44.70 | N | GND |
| 16.397 | FINAL | 13.3 | — | 60.00 | -46.67 | N | GND |
| 16.397 | FINAL | — | 9.08 | 50.00 | -40.92 | N | GND |
| 29.173 | FINAL | — | 10.76 | 50.00 | -39.24 | N | GND |
| 29.173 | FINAL | 14.2 | — | 60.00 | -45.76 | N | GND |

Table 7-18. AC Line Conducted (LE2M – 5245MHz) (N) with host PC and lightning charger

| | | | | |
|---|---|------------------------------------|--|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 48 of 50 |

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Wireless Left Earbud** **FCC ID: BCG-A2699** is in compliance with is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | Page 49 of 50 |

9.0 APPENDIX A

Antenna gains provided by manufacturer.

| Frequency (MHz) | H (dBi) | V (dBi) |
|-----------------|---------|---------|
| 2402 | -12.1 | -4.1 |
| 2441 | -10.8 | -3.6 |
| 2480 | -10.3 | -3.4 |
| 5150 | -8.2 | -4.2 |
| 5250 | -7.6 | -3.4 |
| 5725 | -6.1 | -6.0 |
| 5850 | -7.4 | -7.4 |
| 5925 | -7.1 | -6.8 |
| 5987 | -5.5 | -5.2 |
| 6113 | -4.4 | -3.5 |
| 6176 | -4.8 | -1.9 |
| 6238 | -3.0 | -2.7 |
| 6301 | -3.7 | -2.1 |
| 6425 | -5.1 | -2.7 |

Table 9-1. Antenna Gains

| | | | | |
|---|--|------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2699 |  element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2204080014-05.BCG | Test Dates: 6/7/2022 - 8/23/2022 | EUT Type: Wireless Earbud | | Page 50 of 50 |