




Element Washington DC LLC
18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>



DATA REFERENCE REPORT

FCC PART 15.407 / ISSED RSS-247 UNII 802.11a/n

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

6/7/2022 – 8/5/2022

Test Site/Location:

Element Washington DC LLC, Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090039-11.BCG

FCC ID:

BCG-A2773

IC:

579C-A2773

APPLICANT:

Apple Inc.

Reference Model/HVIN:

A2772

Variant Model/HVIN:

A2773 (A2857)

EUT Type:

Watch

Frequency Range:

5180 – 5825MHz

Modulation Type:

OFDM

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v05r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: BCG-A2773 IC: 579C-A2773		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090039-11.BCG	Test Dates: 6/7/2022 – 9/1/2022	EUT Type: Watch	Page 1 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Washington DC LLC Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	5
3.0	CONCLUSION	6
4.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	7

FCC ID: BCG-A2773 IC: 579C-A2773		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090039-11.BCG	Test Dates: 6/7/2022 – 9/1/2022	EUT Type: Watch	Page 2 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Per manufacturer declaration, there are two watch models, A2772 and A2773 (A2857), with high degree of similarity, reference model FCC ID: BCG-A2772 / IC: 579C-A2772 and variant model **FCC ID: BCG-A2773 / IC: 579C-A2773**. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC/ISED approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCG-A2772 / IC: 579C-A2772, while radiated and conducted spot-check verification has been performed on variant model **FCC ID: BCG-A2773 / IC: 579C-A2773**. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID & IC	Reference Report	Report Title
NII	BCG-A2772 579C-A2772	1C2205090038-11.BCG	RF UNII Test Report

Table 1-1. Reference Model Details

Spot-check verification are not applicable to this test report; therefore, all data for variant model **FCC ID: BCG-A2773 / IC: 579C-A2773** can be fully referenced from the reference model.

Reference model FCC ID: BCG-A2772 / IC: 579C-A2772 test report has been included in Appendix A.

1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washinton DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2773 IC: 579C-A2773		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 – 9/1/2022	EUT Type: Watch	Page 3 of 7

V 10.5 12/15/2021

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2773** and **IC: 579C-A2773**. The test data contained in this report pertains only to the emissions due to the EUT's UNII 802.11a/n transmitter.

Test Device Serial No.: PY600DFR66, D3FRX404K1, H177GN7WJ7

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n (20MHz) Frequency / Channel Operations

Notes:

- 5GHz NII operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		FCM
5GHz	a	98.4
	n (HT20) (MCS0)	99.4
	n (HT20) (MCS7)	97.7

Table 2-2. Measured Duty Cycles

Data Rate(s) Tested: 6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54Mbps (802.11a)
6.5/7.2 Mbps, 13/14.4 Mbps, 19.5/21.7 Mbps, 26/28.9 Mbps, 39/43.3 Mbps, 52/57.8 Mbps, 58.5/65 Mbps,
65/72.2 Mbps (n – 20MHz)

FCC ID: BCG-A2773 IC: 579C-A2773	 DATA REFERENCE REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090039-11.BCG	Test Dates: 6/7/2022 – 9/1/2022	EUT Type: Watch	Page 4 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2. This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE1/2M	Mid/High Band	802.11 a/n	Ch.5/Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✓	✗	✓	✗
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✗	✓	✗	✓
Config 8	✗	✓	✓	✗	✓
Config 9	✓	✗	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

Table 2-2. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)
	FCM
5.150 – 5.250	-10.1
5.250 – 5.350	-8.4
5.470 – 5.725	-5.3
5.725 – 5.850	-4.7

Table 2-3. Highest Antenna Gain

FCC ID: BCG-A2773 IC: 579C-A2773	 DATA REFERENCE REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090039-11.BCG	Test Dates: 6/7/2022 – 9/1/2022	EUT Type: Watch	Page 5 of 7

V 10.5 12/15/2021

3.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCG-A2773 / IC: 579C-A2773** is in tolerance with reference model FCC ID: BCG-A2772 / IC: 579C-A2772 per FCC/ISED Approved Data Referencing Test Plan.

FCC ID: BCG-A2773 IC: 579C-A2773		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090039-11.BCG	Test Dates: 6/7/2022 – 9/1/2022	EUT Type: Watch	Page 6 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


4.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2205090038-11.BCG) from reference model FCC ID: BCG-A2772 / IC: 579C-A2772, which includes referenced data results.

FCC ID: BCG-A2773 IC: 579C-A2773		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090039-11.BCG	Test Dates: 6/7/2022 – 9/1/2022	EUT Type: Watch	Page 7 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT

FCC PART 15.407 / ISSED RSS-247 UNII 802.11a/n

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

6/7/2022 - 8/5/2022

Test Site/Location:

Element Washington DC LLC Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090038-11.BCG

FCC ID:

BCG-A2772

IC:

579C-A2772

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2772

EUT Type:

Watch

Frequency Range:

5180 – 5825MHz

Modulation Type:

OFDM

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President



FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 1 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	6
2.4	Test Support Equipment.....	7
2.5	Test Configuration	7
2.6	Software and Firmware	8
2.7	EMI Suppression Device(s)/Modifications.....	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	AC Line Conducted Emissions	9
3.3	Radiated Emissions.....	10
3.4	Environmental Conditions.....	10
4.0	ANTENNA REQUIREMENTS	11
5.0	MEASUREMENT UNCERTAINTY	12
6.0	TEST EQUIPMENT CALIBRATION DATA.....	13
7.0	TEST RESULTS	14
7.1	Summary.....	14
7.2	26dB & 99% Bandwidth Measurement – 802.11a/n.....	16
7.3	6dB & 99% Bandwidth Measurement – 802.11a/n.....	20
7.4	Conducted Output Power and Max EIRP Measurement – 802.11a/n.....	23
7.5	Maximum Power Spectral Density – 802.11a/n	25
7.6	Radiated Spurious Emissions – Above 1GHz.....	31
7.7	Radiated Spurious Emissions – Below 1GHz	52
7.8	AC Line-Conducted Emissions Measurement.....	57
8.0	CONCLUSION.....	61
9.0	APPENDIX A	62


FCC ID: BCG-A2772 IC: 579C-A2772		 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch		Page 2 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	FCM	
				Max. Power (mW)	Max. Power (dBm)
1	20	802.11a	5180 - 5240	50.119	17.00
		802.11n (MCS0)		49.545	16.95
		802.11n (MCS7)		31.623	15.00
2A		802.11a	5260 - 5320	50.119	17.00
		802.11n (MCS0)		49.888	16.98
		802.11n (MCS7)		31.405	14.97
2C		802.11a	5500 - 5720	50.119	17.00
		802.11n (MCS0)		50.119	17.00
		802.11n (MCS7)		31.623	15.00
3		802.11a	5745 - 5825	50.119	17.00
		802.11n (MCS0)		48.865	16.89
		802.11n (MCS7)		31.623	15.00

FCC/ISED EUT Overview

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 3 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 4 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2772** and **IC: 579C-A2772**. The test data contained in this report pertains only to the emissions due to the EUT's UNII 802.11a/n transmitter.

Test Device Serial No.: GFYCXRNVNQ, G72WC2W7XJ, DLC2153009H1T0J3T

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n (20MHz) Frequency / Channel Operations

Notes:

- 5GHz NII operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		FCM
5GHz	a	98.4
	n (HT20) (MCS0)	99.4
	n (HT20) (MCS7)	97.7

Table 2-2. Measured Duty Cycles

Data Rate(s) Tested: 6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54Mbps (802.11a)
6.5/7.2 Mbps, 13/14.4 Mbps, 19.5/21.7 Mbps, 26/28.9 Mbps, 39/43.3 Mbps, 52/57.8 Mbps, 58.5/65 Mbps,
65/72.2 Mbps (n – 20MHz)

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 5 of 62

V 10.5 12/15/2021

- This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE1/2M	Mid/High Band	802.11 a/n	Ch.5/Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✓	✗	✓	✗
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✗	✓	✗	✓
Config 8	✗	✓	✓	✗	✓
Config 9	✓	✗	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

Table 2-3. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)
	FCM
5.150 – 5.250	-10.1
5.250 – 5.350	-8.4
5.470 – 5.725	-5.3
5.725 – 5.850	-4.7

Table 2-4. Highest Antenna Gain

Notes:

- Antenna specification has been attached at Appendix A.

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 6 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.4 Test Support Equipment

1	Apple Macbook	Model:	A1398	S/N:	C2QKP008F6F3
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
2	Apple USB-C cable	Model:	N/A	S/N:	N/A
	w/ Charging Dock	Model:	N/A	S/N:	DQ8137601MH08V22W
	w/ Cradle	Model:	LA2-AC-SM-P1	S/N:	FV40423073CMW6M3J
3	Apple Magnetic Charger	Model:	A2515	S/N:	DLC035200UJMFROAJ
	Apple Magnetic Charger	Model:	A2515	S/N:	DLC035202KRMFROA2
4	Pathfinder Falcon	Model:	920-098626-01	S/N:	DLC03770065Q6PM1W
	SiP Socket	Model:	N/A	S/N:	P1 X2538S PF097
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Store Sample Wristband	Model:	N/A	S/N:	DLC219400361YDQ2W

Table 2-5. Test Support Equipment List

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

The worst case configuration was investigated for all combinations of materials (aluminum and stainless steel) and wristbands (metal and non-metal). The EUT was also investigated with and without magnetic charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configurations were investigated:

- EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
- EUT powered by host PC via USB-C cable with magnetic charger

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

Description	Bluetooth	LTE	UNII
Antenna	FCM	FCM	FCM
Channel	78	40620	36
Operating Frequency (MHz)	2480	2593	5180
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz	11n

Table 2-6. Worst Case Simultaneous Transmission Configuration

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 7 of 62

V 10.5 12/15/2021

2.6 Software and Firmware

The test was conducted with firmware version watchOS 9.0 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 8 of 62

V 10.5 12/15/2021

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 9 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCG-A2772 IC: 579C-A2772		 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch		Page 10 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 11 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.77
Line Conducted Disturbance	2.70
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz - 1GHz)	4.75
Radiated Disturbance (1 - 18GHz)	5.2
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 12 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/13/2021	Annual	8/13/2022	T058701-01
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/11/2022	Annual	5/11/2023	205956
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/6/2022	Annual	1/6/2023	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	ENV216	Two-Line V-Network	1/14/2022	Annual	1/14/2023	101364
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/18/2022	Annual	4/18/2023	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 13 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A2772
 IC: 579C-A2772
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		PASS	Section 7.2, Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report	RADIATED	PASS	See DFS Test Report (1C22050900 38-10.BCG)
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])		PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 14 of 62

V 10.5 12/15/2021

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 7.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.2.
- 6) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 15 of 62

V 10.5 12/15/2021

7.2 26dB & 99% Bandwidth Measurement – 802.11a/n

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All modes were investigated and only the worst case are reported.

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 16 of 62

V 10.5 12/15/2021


26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	19.31	24.08
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	19.32	24.98
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	19.36	24.83
Band 2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	19.32	24.81
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.36	25.39
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	19.36	24.62
Band 2C	5500	100	n (20MHz)	6.5/7.2 (MCS0)	19.06	23.50
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	19.27	24.73
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	19.39	25.82


Table 7-2. Conducted Bandwidth Measurements

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 17 of 62


V 10.5 12/15/2021

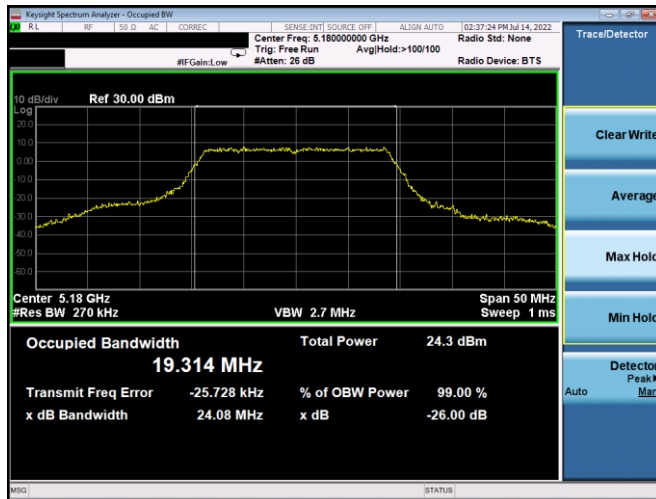


Plot 7-1. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 36, MCS0)

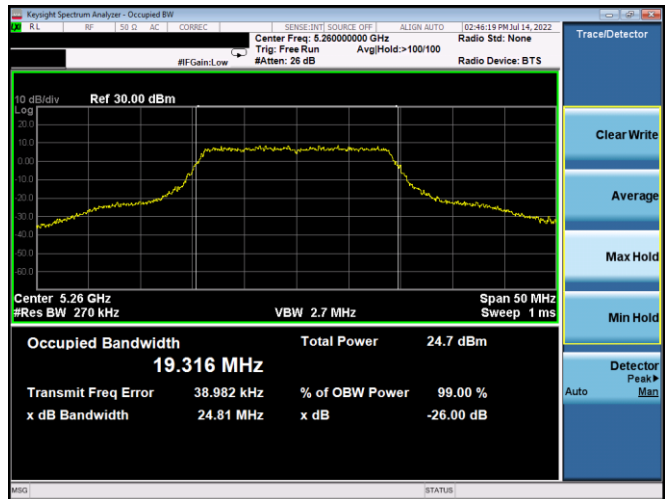


Plot 7-4. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 52, MCS0)

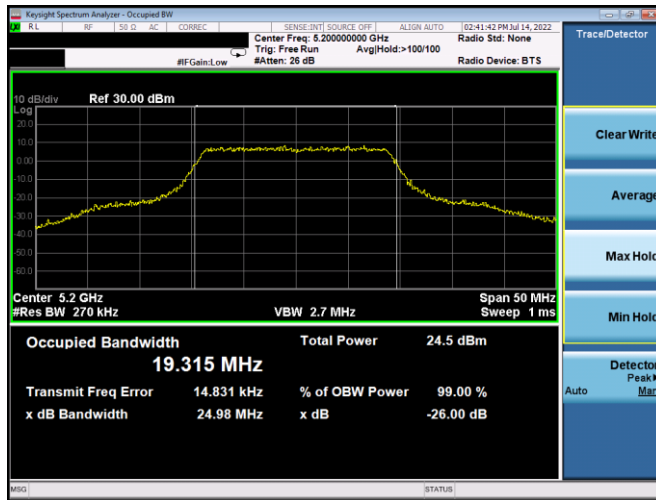


Plot 7-2. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 40, MCS0)

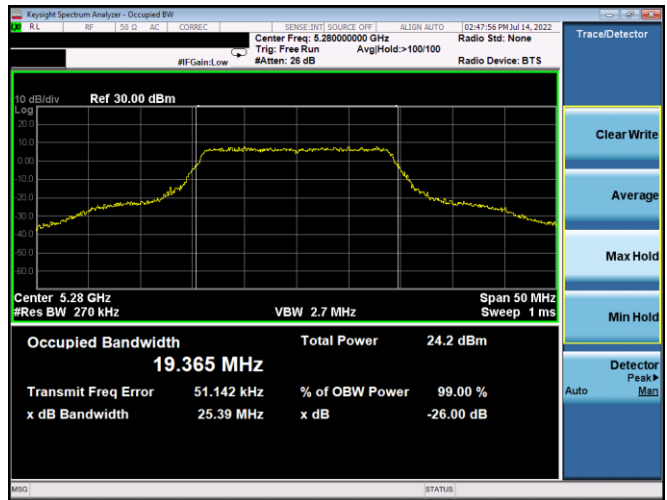

Plot 7-5. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 56, MCS0)

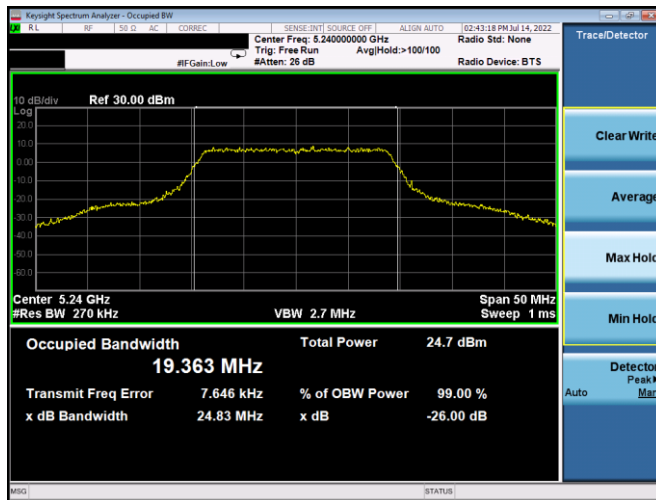

Plot 7-3. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 48, MCS0)

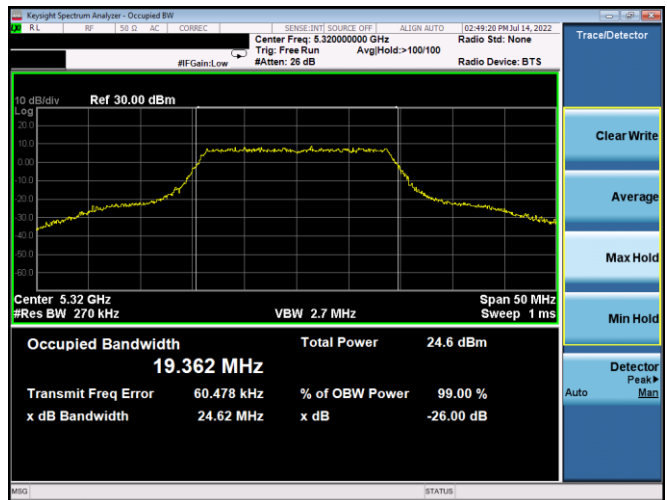


Plot 7-6. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 64, MCS0)

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 18 of 62



Plot 7-7. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 100, MCS0)

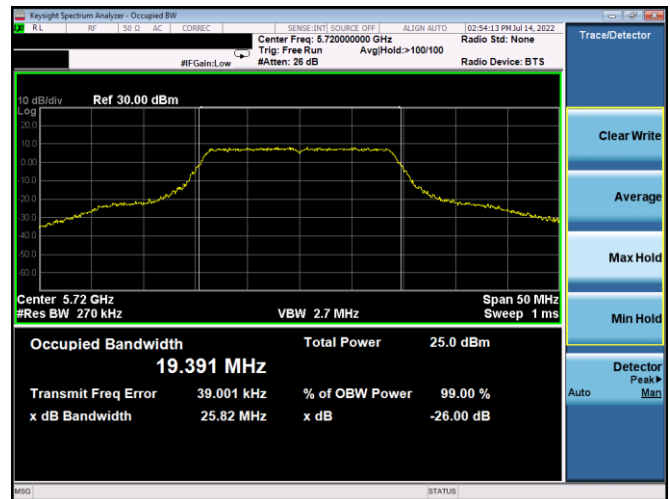

Plot 7-9. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 144, MCS0)



Plot 7-8. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 116, MCS0)

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 19 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3 6dB & 99% Bandwidth Measurement – 802.11a/n §2.1049; §15.407 (e); RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. All modes were investigated and only the worst case are reported.

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 20 of 62

V 10.5 12/15/2021


6dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	n (20MHz)	6.5/7.2 (MCS0)	19.05	17.64	0.50	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	19.18	17.68	0.50	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	19.02	17.66	0.50	Pass


Table 7-3. Conducted Bandwidth Measurements

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 21 of 62


V 10.5 12/15/2021

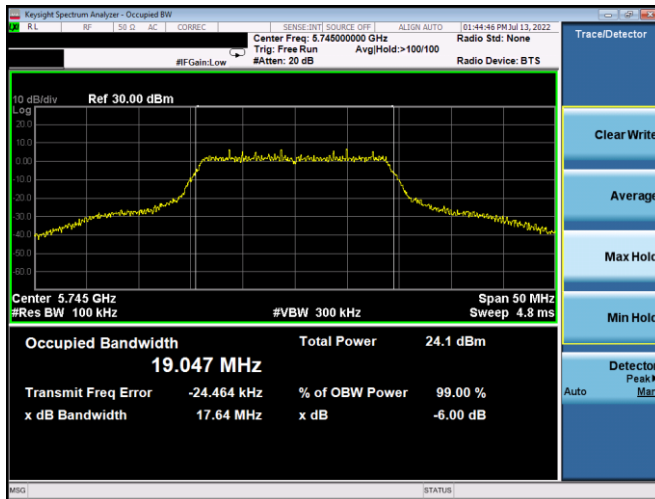

Plot 7-10. 6dB BW & 99% OBW (20MHz BW 802.11n – Ch. 149, MCS0)

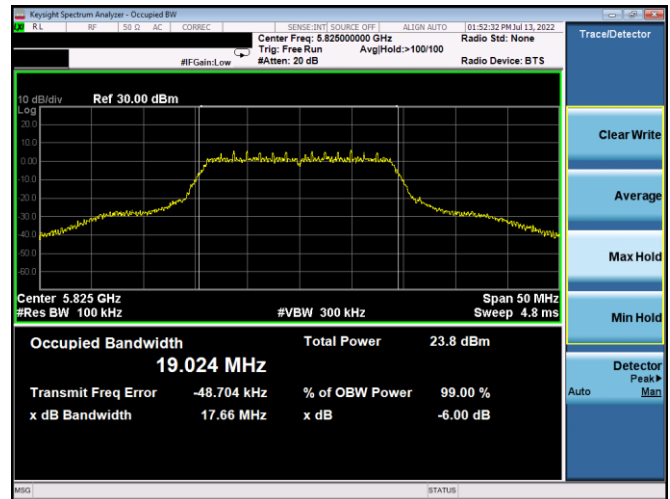

Plot 7-12. 6dB BW & 99% OBW (20MHz BW 802.11n – Ch. 165, MCS0)

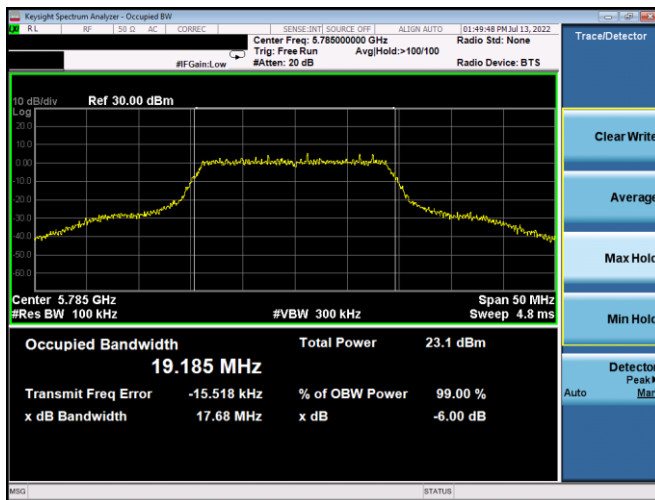

Plot 7-11. 6dB BW & 99% OBW (20MHz BW 802.11n – Ch. 157, MCS0)

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 22 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4 Conducted Output Power and Max EIRP Measurement – 802.11a/n §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 99% OBW per ISSED RSS-247 and 26dB BW is per FCC 15.407.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(24.62) = 24.91\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(23.5) = 24.71\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

- Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 23 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	Detector	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
			802.11a	802.11n (MCS0)	802.11n (MCS7)		
5180	36	AVG	16.98	16.95	15.00	23.98	-7.00
5200	40	AVG	17.00	16.89	15.00	23.98	-6.98
5240	48	AVG	16.84	16.90	14.81	23.98	-7.08
5260	52	AVG	16.96	16.98	14.94	23.98	-7.00
5300	60	AVG	16.93	16.96	14.97	23.98	-7.02
5320	64	AVG	17.00	16.90	14.94	23.98	-6.98
5500	100	AVG	17.00	17.00	15.00	23.98	-6.98
5580	116	AVG	17.00	16.97	14.84	23.98	-6.98
5660	132	AVG	17.00	17.00	15.00	23.98	-6.98
5680	136	AVG	16.90	16.95	14.97	23.98	-7.03
5700	140	AVG	14.00	14.00	14.00	23.98	-9.98
5720	144	AVG	17.00	16.83	15.00	23.98	-6.98
5745	149	AVG	17.00	16.75	14.87	30.00	-13.00
5785	157	AVG	17.00	16.89	15.00	30.00	-13.00
5825	165	AVG	17.00	16.80	14.79	30.00	-13.00

Table 7-4. FCC 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11a	802.11n (MCS0)	802.11n (MCS7)						
5180	36	AVG	16.98	16.95	15.00	-	-	-10.10	6.88	23.01	-16.13
5200	40	AVG	17.00	16.89	15.00	-	-	-10.10	6.90	23.01	-16.11
5240	48	AVG	16.84	16.90	14.81	-	-	-10.10	6.80	23.01	-16.21
5260	52	AVG	16.96	16.98	14.94	23.98	-7.00	-8.40	8.58	30.00	-21.42
5300	60	AVG	16.93	16.96	14.97	23.98	-7.02	-8.40	8.56	30.00	-21.44
5320	64	AVG	17.00	16.90	14.94	23.98	-6.98	-8.40	8.60	30.00	-21.40
5500	100	AVG	17.00	17.00	15.00	23.98	-6.98	-5.30	11.70	30.00	-18.30
5580	116	AVG	17.00	16.97	14.84	23.98	-6.98	-5.30	11.70	30.00	-18.30
5660	132	AVG	17.00	17.00	15.00	23.98	-6.98	-5.30	11.70	30.00	-18.30
5680	136	AVG	16.90	16.95	14.97	23.98	-7.03	-5.30	11.65	30.00	-18.35
5700	140	AVG	14.00	14.00	14.00	23.98	-9.98	-5.30	8.70	30.00	-21.30
5720	144	AVG	17.00	16.83	15.00	23.98	-6.98	-5.30	11.70	30.00	-18.30
5745	149	AVG	17.00	16.75	14.87	30.00	-13.00	-4.70	12.30	-	-
5785	157	AVG	17.00	16.89	15.00	30.00	-13.00	-4.70	12.30	-	-
5825	165	AVG	17.00	16.80	14.79	30.00	-13.00	-4.70	12.30	-	-

Table 7-5. ISSED 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11a (20MHz BW) mode, the average conducted power was calculated to be 16.98 dBm with directional gain of -10.10 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$16.98 \text{ dBm} + -10.10 \text{ dBi} = 6.88 \text{ dBm}$$

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 24 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Maximum Power Spectral Density – 802.11a/n §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.15 – 5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1 MHz band.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. All modes have been investigated and only the worst case data is reported.

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 25 of 62

V 10.5 12/15/2021

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.75	11.0	-5.25
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	5.18	11.0	-5.82
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.55	11.0	-5.45
Band 2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	5.35	11.0	-5.65
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	5.24	11.0	-5.76
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	5.46	11.0	-5.54
Band 2C	5500	100	n (20MHz)	6.5/7.2 (MCS0)	5.41	11.0	-5.59
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	4.25	11.0	-6.75
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	5.06	11.0	-5.94


Table 7-6. Bands 1, 2A, 2C Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.75	-10.10	-4.35	10.0	-14.35
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	5.18	-10.10	-4.92	10.0	-14.92
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.55	-10.10	-4.55	10.0	-14.55


Table 7-7. ISED Band 1 e.i.r.p. Power Spectral Density Measurements

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 26 of 62


V 10.5 12/15/2021

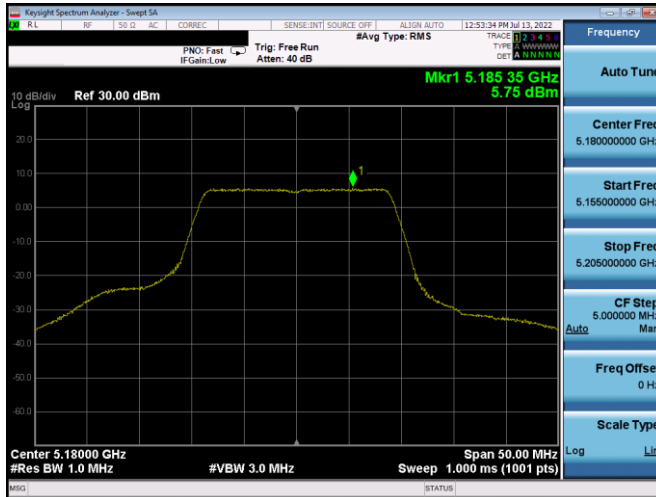


Plot 7-13. PSD (20MHz BW 802.11n - Ch. 36, MCS0)

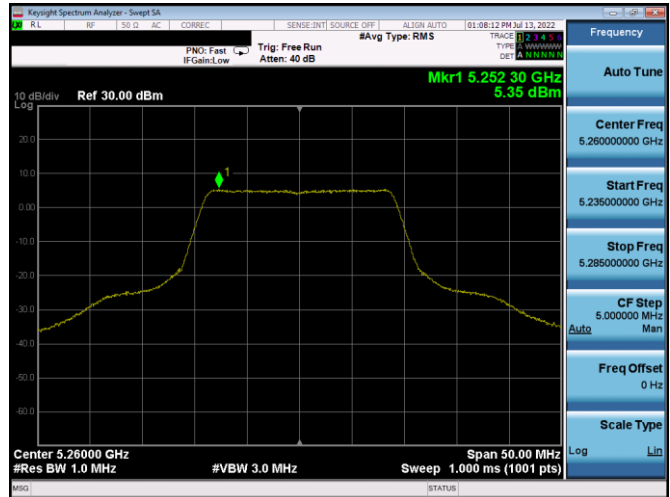


Plot 7-16. PSD (20MHz BW 802.11n - Ch. 52, MCS0)

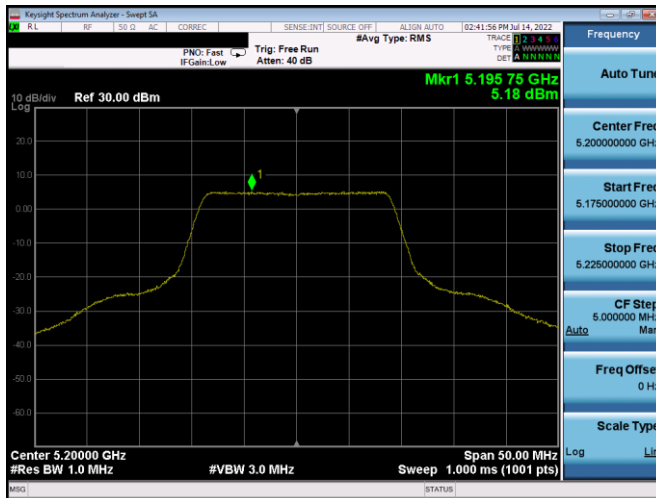


Plot 7-14. PSD (20MHz BW 802.11n - Ch. 40, MCS0)

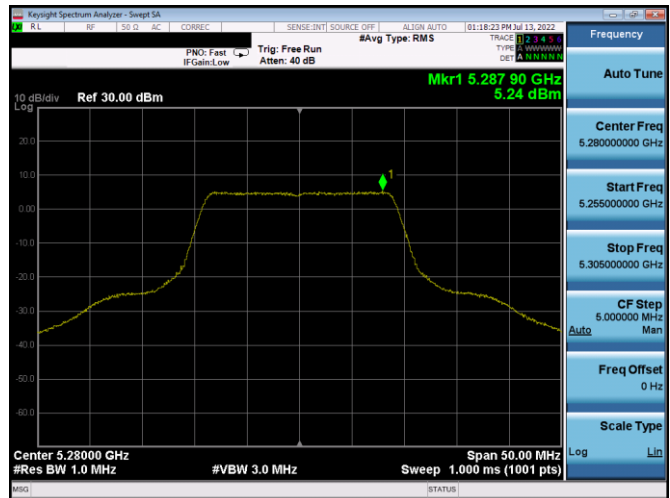

Plot 7-17. PSD (20MHz BW 802.11n - Ch. 56, MCS0)

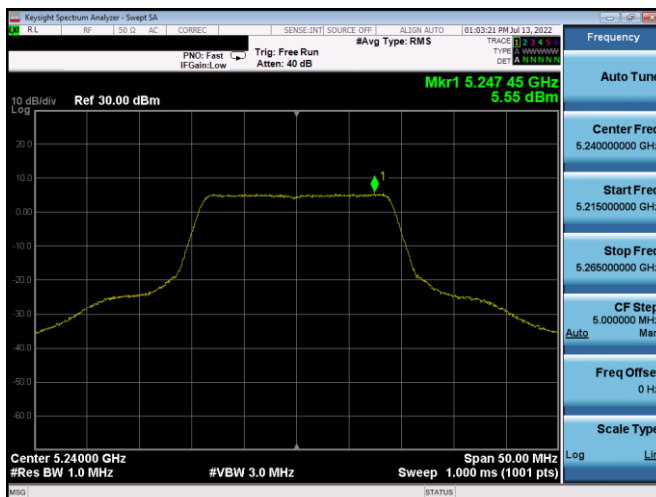


Plot 7-15. PSD (20MHz BW 802.11n - Ch. 48, MCS0)

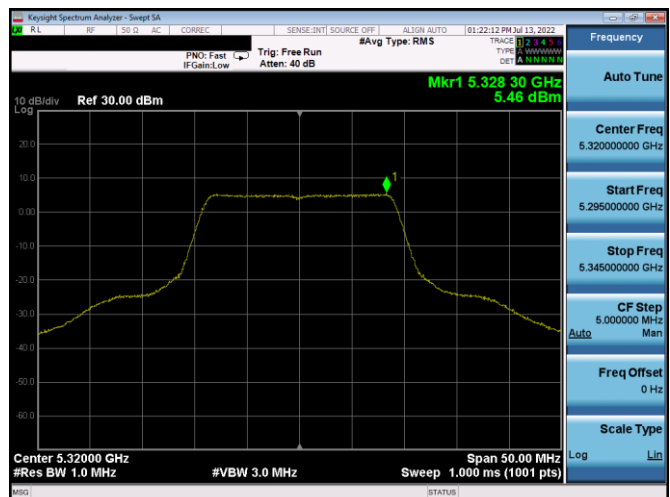


Plot 7-18. PSD (20MHz BW 802.11n - Ch. 64, MCS0)


FCC ID: BCG-A2772 IC: 579C-A2772	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 27 of 62

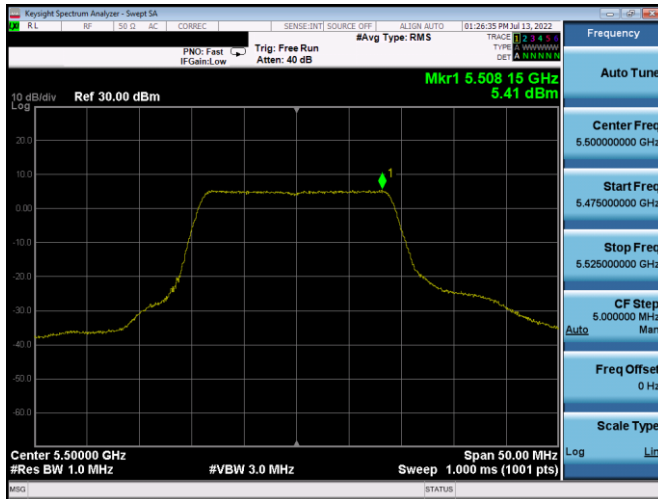

Plot 7-19. PSD (20MHz BW 802.11n - Ch. 100, MCS0)

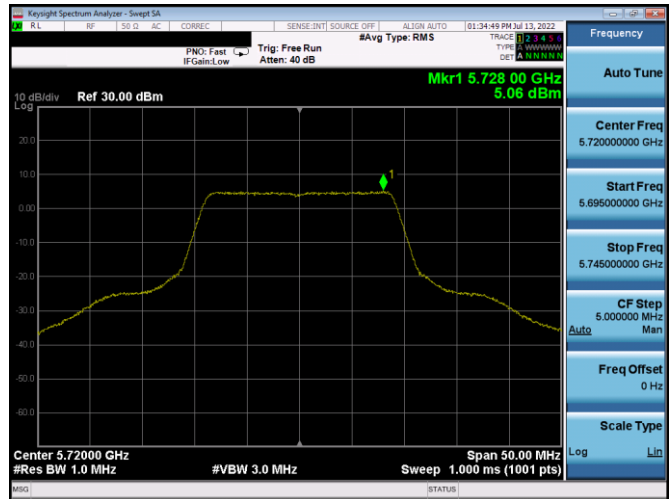

Plot 7-21. PSD (20MHz BW 802.11n - Ch. 144, MCS0)

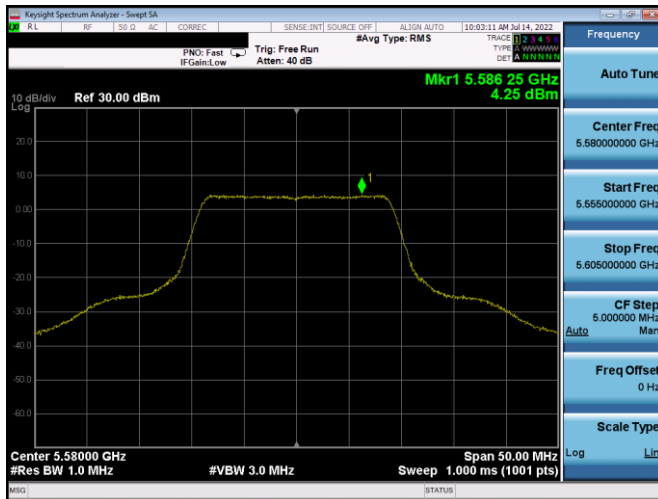

Plot 7-20. PSD (20MHz BW 802.11n - Ch. 116, MCS0)


FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 28 of 62

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	n (20MHz)	6.5/7.2 (MCS0)	2.24	30.0	-27.76
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	1.21	30.0	-28.79
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	1.42	30.0	-28.58


Table 7-8. Band 3 Power Spectral Density Measurements

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 29 of 62


V 10.5 12/15/2021

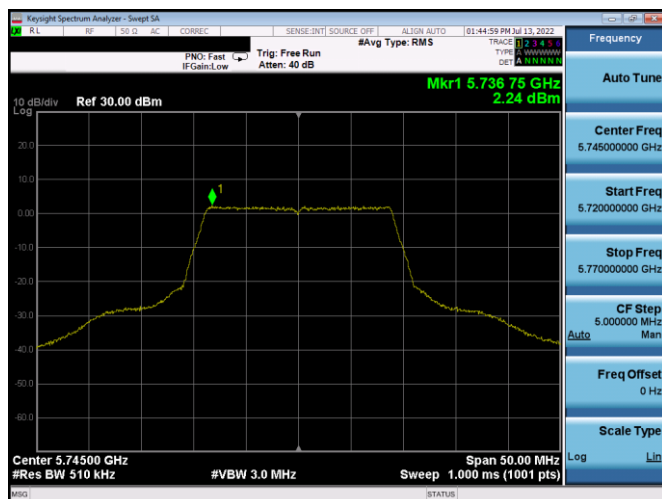

Plot 7-22. PSD (20MHz BW 802.11n – Ch. 149, MCS0)

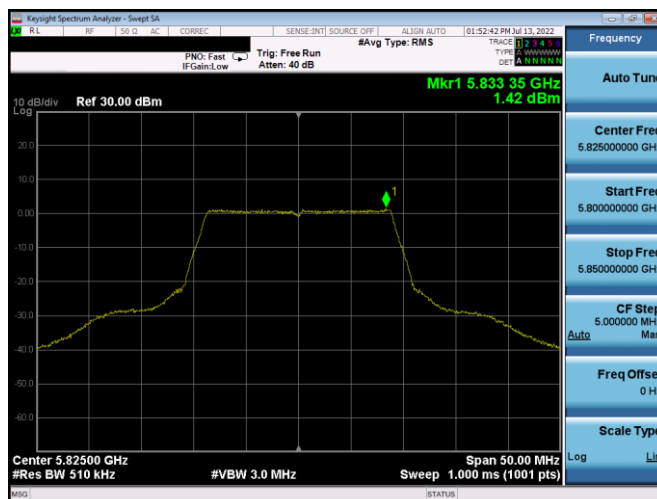

Plot 7-24. PSD (20MHz BW 802.11n – Ch. 165, MCS0)

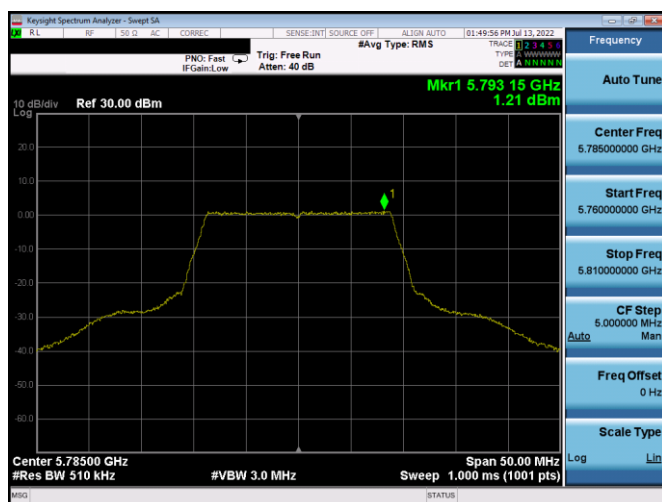

Plot 7-23. PSD (20MHz BW 802.11n – Ch. 157, MCS0)

Note:

Sample e.i.r.p Power Spectral Density Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average power density was calculated to be 5.75 dBm with directional gain of -10.10 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$5.75 \text{ dBm} + -10.10 \text{ dBi} = -4.35\text{dBm}$$

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 30 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n) and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-9 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-9. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 31 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

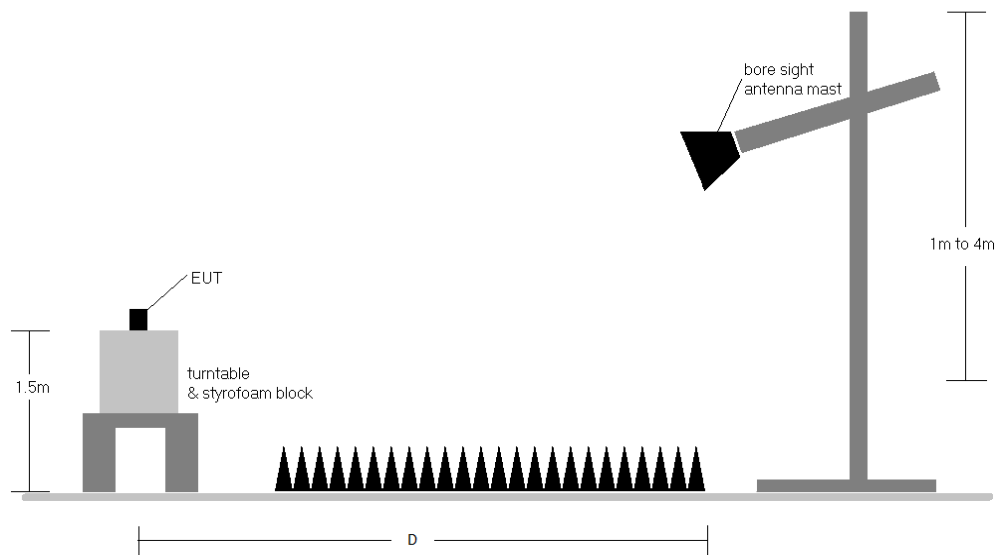


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 32 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates were investigated and only the worse case is reported
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
11. Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.3 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 33 of 62

V 10.5 12/15/2021

7.6.1 Radiated Spurious Emission

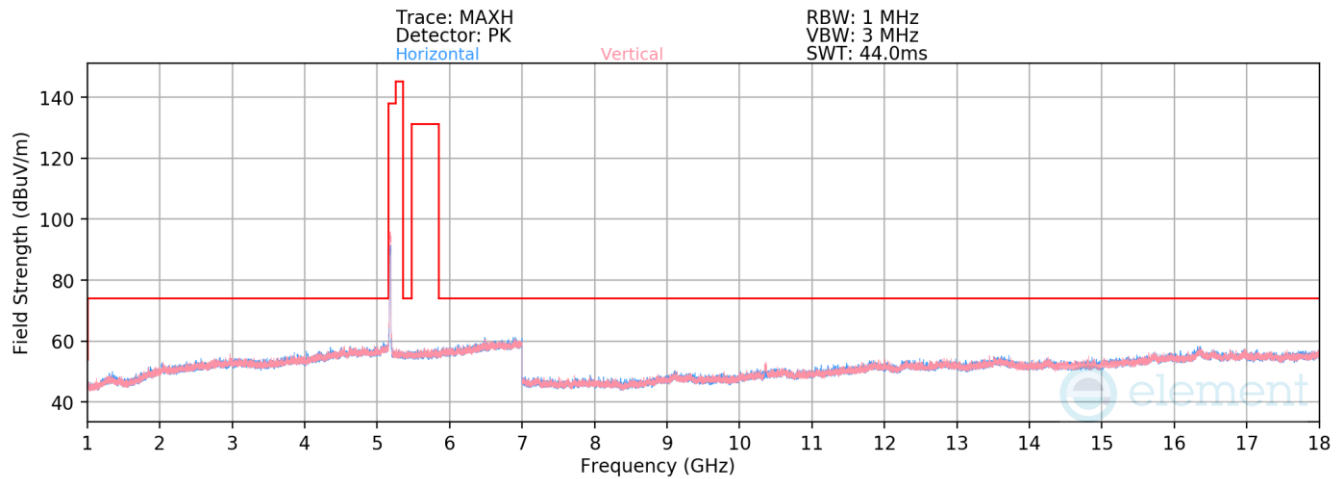

Plot 7-25. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 36)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	241	127	-67.10	15.48	55.38	68.20	-12.82
* 15540.00	Average	V	-	-	-84.43	19.97	42.54	53.98	-11.44
* 15540.00	Peak	V	-	-	-72.92	19.97	54.05	73.98	-19.93

Table 7-10. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 34 of 62

V 10.5 12/15/2021

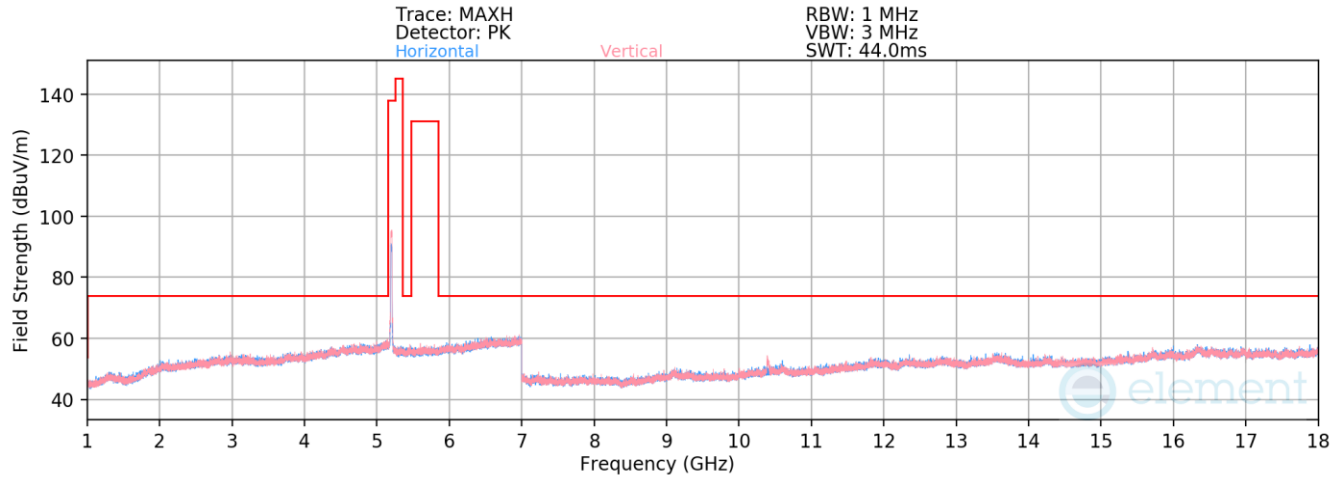

Plot 7-26. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 40)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	237	124	-65.27	15.45	57.18	68.20	-11.02
* 15600.00	Average	V	-	-	-83.39	20.22	43.83	53.98	-10.15
* 15600.00	Peak	V	-	-	-72.18	20.22	55.04	73.98	-18.94

Table 7-11. Radiated Measurements


FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 35 of 62

V 10.5 12/15/2021

Radiated Spurious Emissions (Above 18GHz)

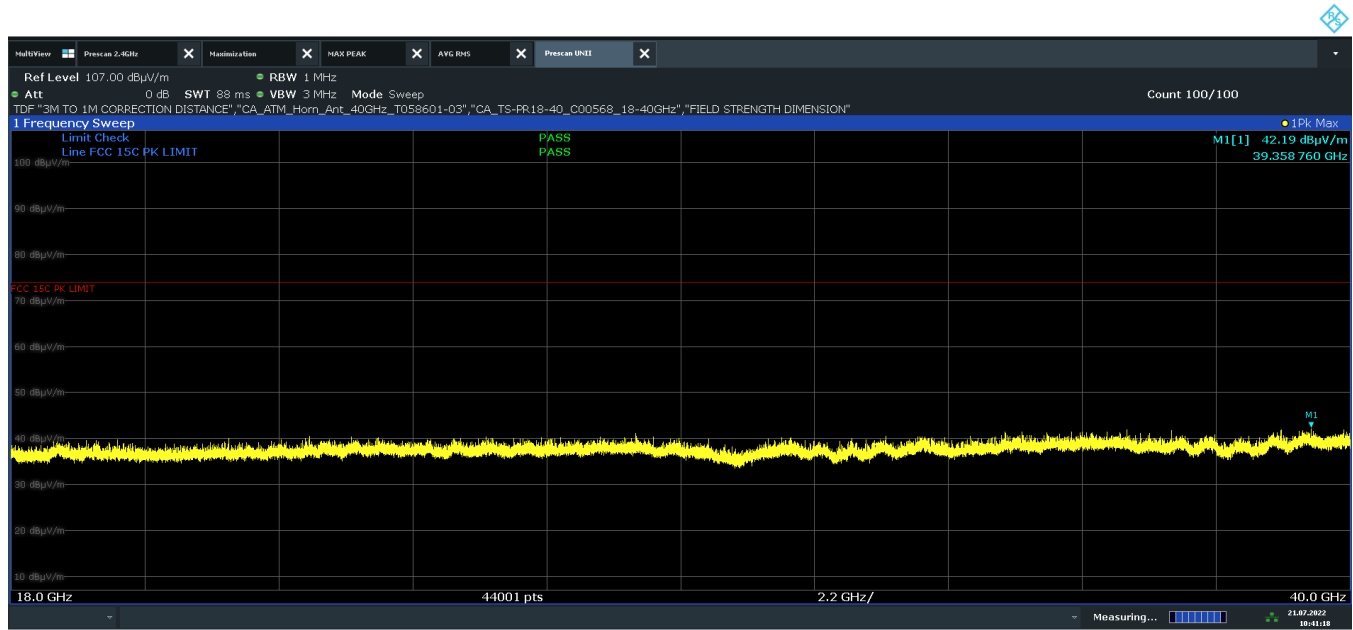

Plot 7-27. Radiated Spurious Emissions 18GHz-40GHz H Polarity (802.11n – Ch. 40)

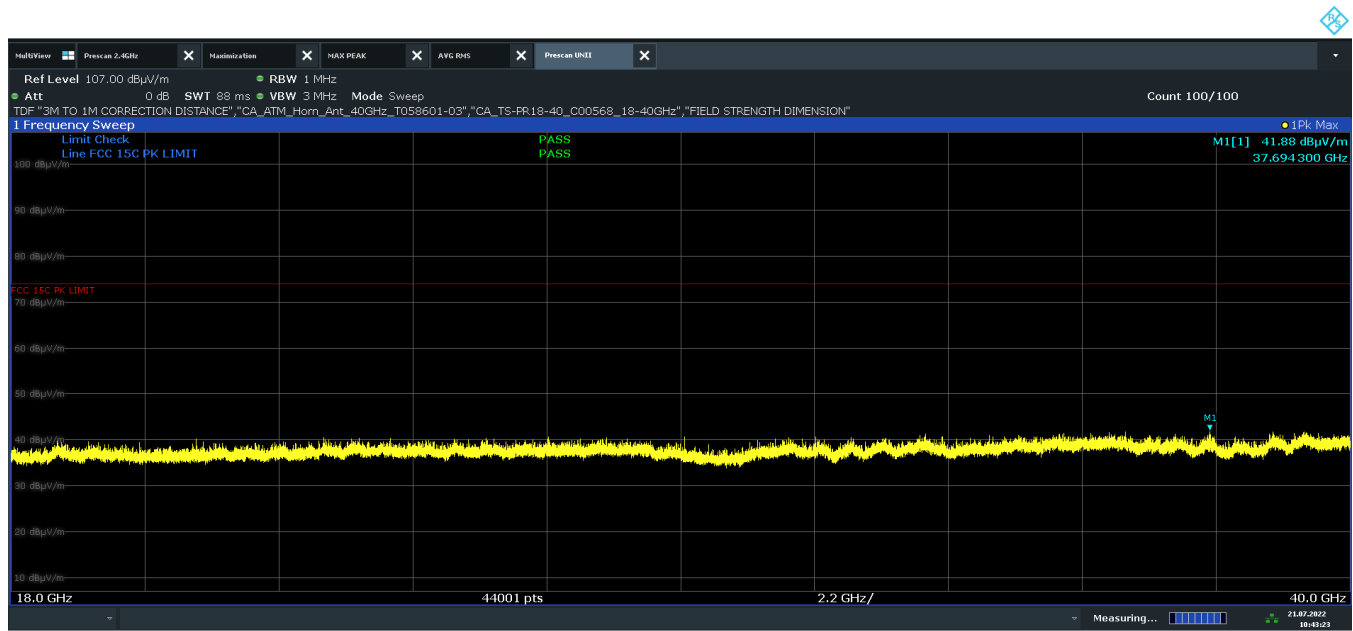


Plot 7-28. Radiated Spurious Emissions 18GHz-40GHz V Polarity (802.11n – Ch. 40)

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 36 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

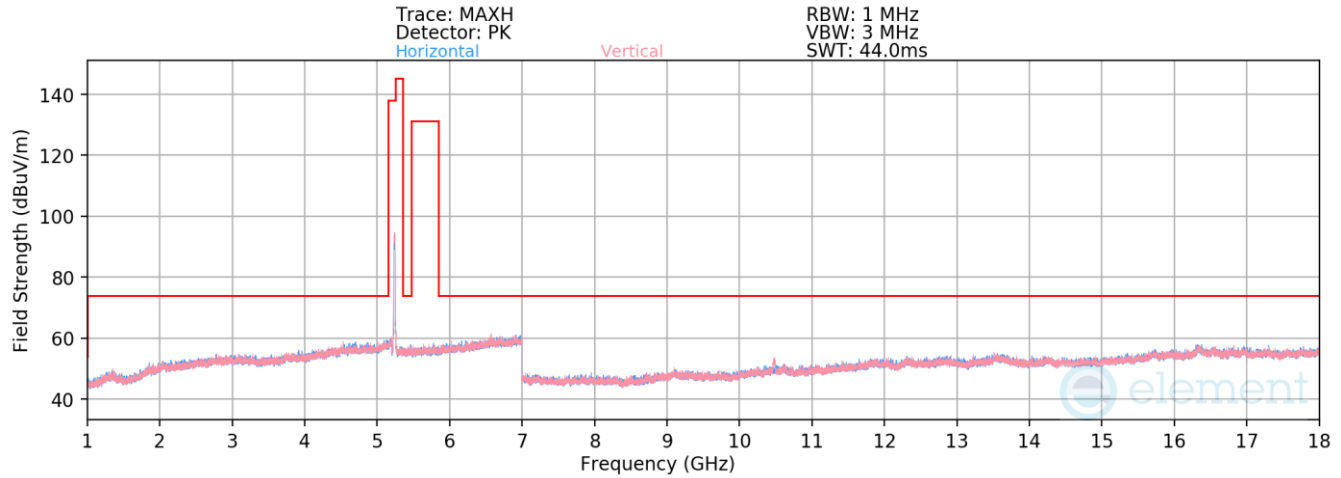

Plot 7-29. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 48)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	233	136	-66.01	15.09	56.08	68.20	-12.12
* 15720.00	Average	V	-	-	-81.51	21.50	46.99	53.98	-6.99
* 15720.00	Peak	V	-	-	-70.00	21.50	58.50	73.98	-15.48

Table 7-12. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 37 of 62

V 10.5 12/15/2021

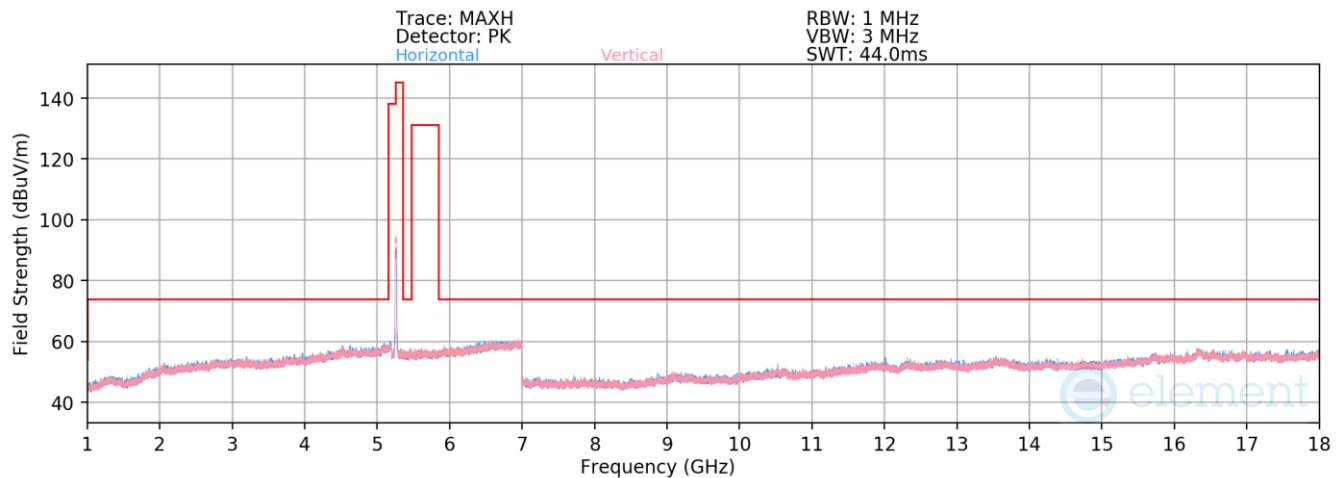

Plot 7-30. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 52)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	233	130	-68.61	14.85	53.24	68.20	-14.96
* 15780.00	Average	V	-	-	-81.35	20.56	46.21	53.98	-7.77
* 15780.00	Peak	V	-	-	-69.74	20.56	57.82	73.98	-16.16

Table 7-13. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 38 of 62

V 10.5 12/15/2021

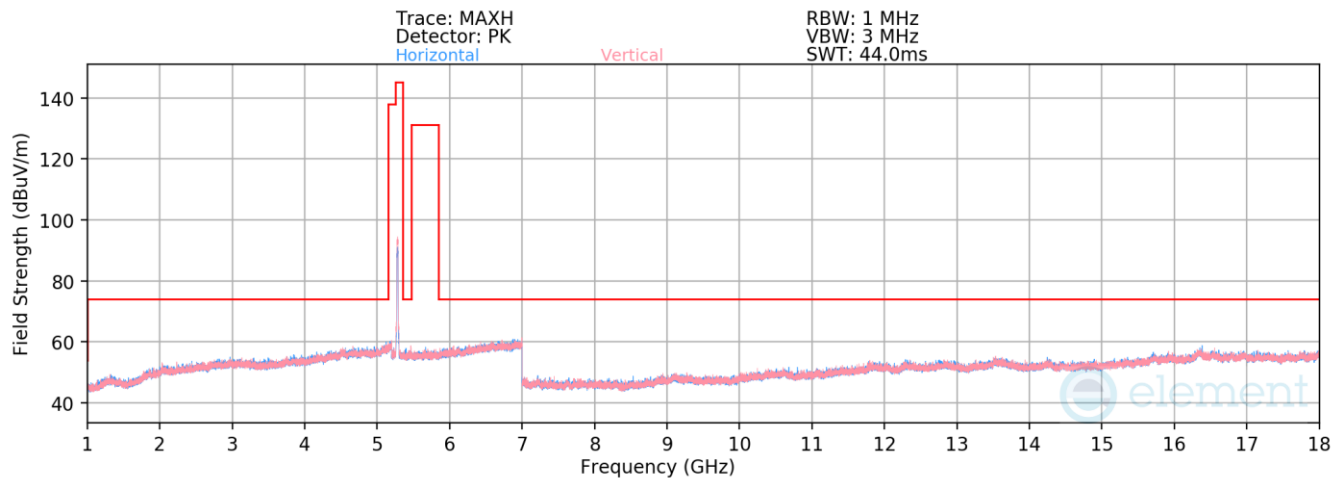

Plot 7-31. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 56)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	233	130	-71.21	15.23	51.02	68.20	-17.18
* 15840.00	Average	V	-	-	-81.39	20.87	46.48	53.98	-7.50
* 15840.00	Peak	V	-	-	-70.17	20.87	57.70	73.98	-16.28

Table 7-14. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 39 of 62

V 10.5 12/15/2021

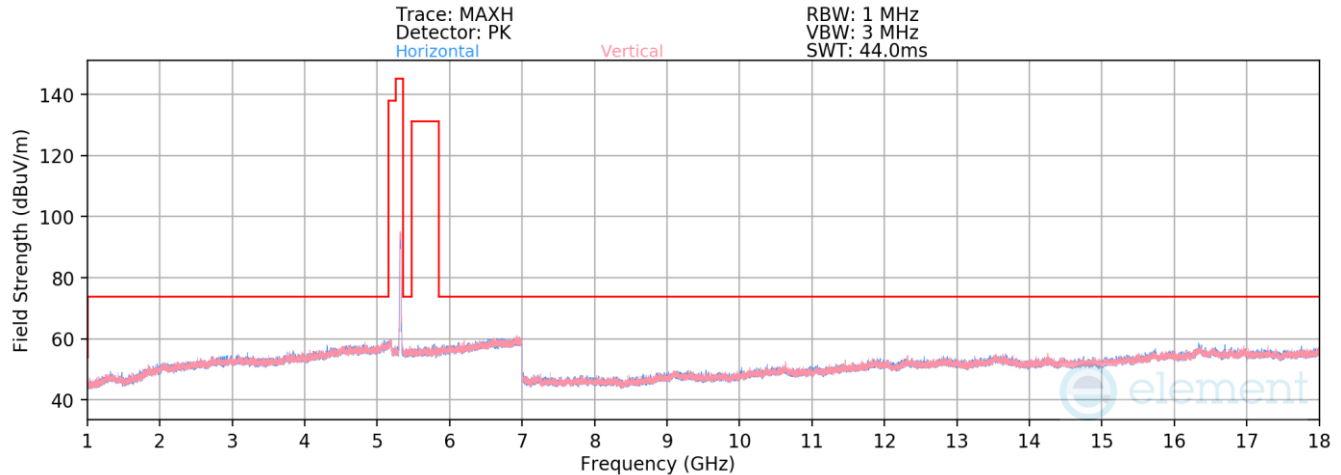

Plot 7-32. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 64)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	245	130	-81.13	15.77	41.64	53.98	-12.34
* 10640.00	Peak	V	245	130	-69.44	15.77	53.33	73.98	-20.65
* 15960.00	Average	V	-	-	-82.58	21.66	46.08	53.98	-7.90
* 15960.00	Peak	V	-	-	-71.12	21.66	57.54	73.98	-16.44

Table 7-15. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 40 of 62

V 10.5 12/15/2021

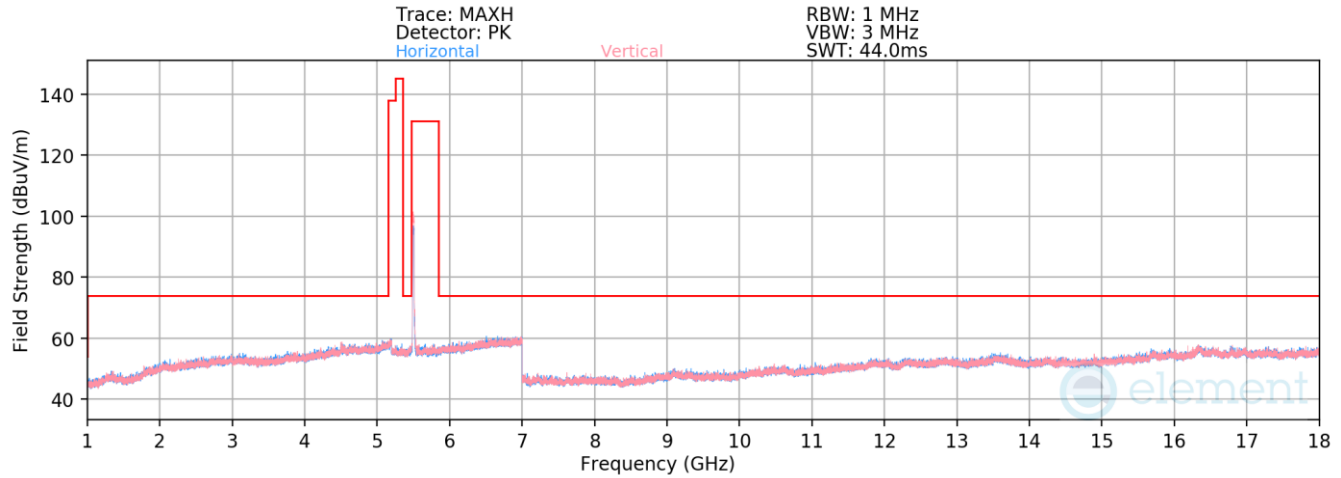

Plot 7-33. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 100)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	V	229	133	-81.75	15.99	41.24	53.98	-12.74
* 11000.00	Peak	V	229	133	-70.21	15.99	52.78	73.98	-21.20
16500.00	Peak	V	-	-	-69.98	21.14	58.16	68.20	-10.04

Table 7-16. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 41 of 62

V 10.5 12/15/2021

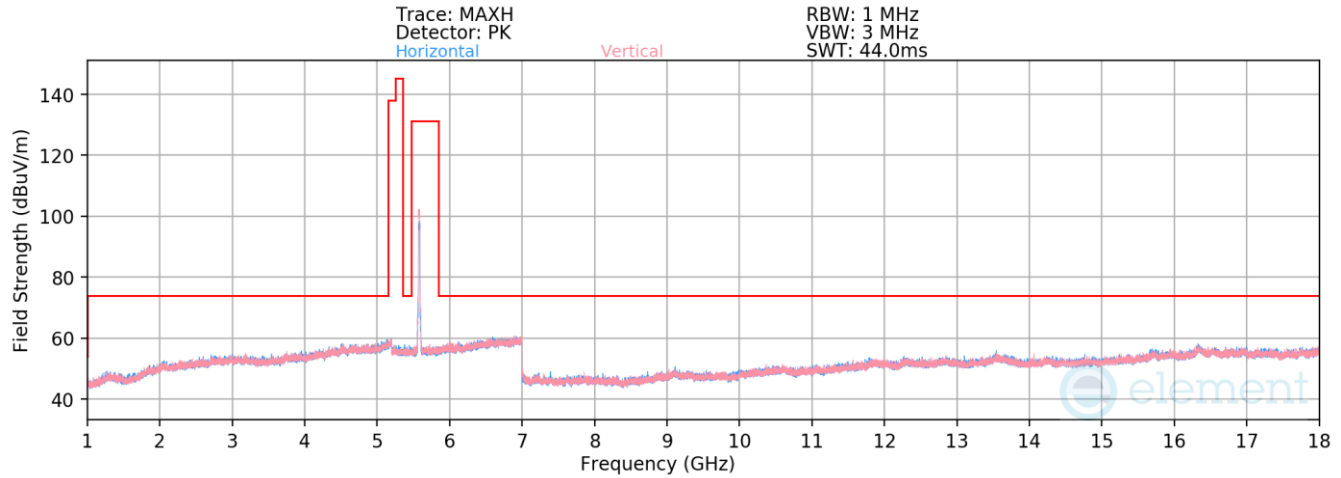

Plot 7-34. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 116)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	V	221	133	-81.38	15.72	41.34	53.98	-12.64
* 11160.00	Peak	V	221	133	-70.14	15.72	52.58	73.98	-21.40
16740.00	Peak	V	-	-	-73.37	21.49	55.12	68.20	-13.08

Table 7-17. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 42 of 62

V 10.5 12/15/2021

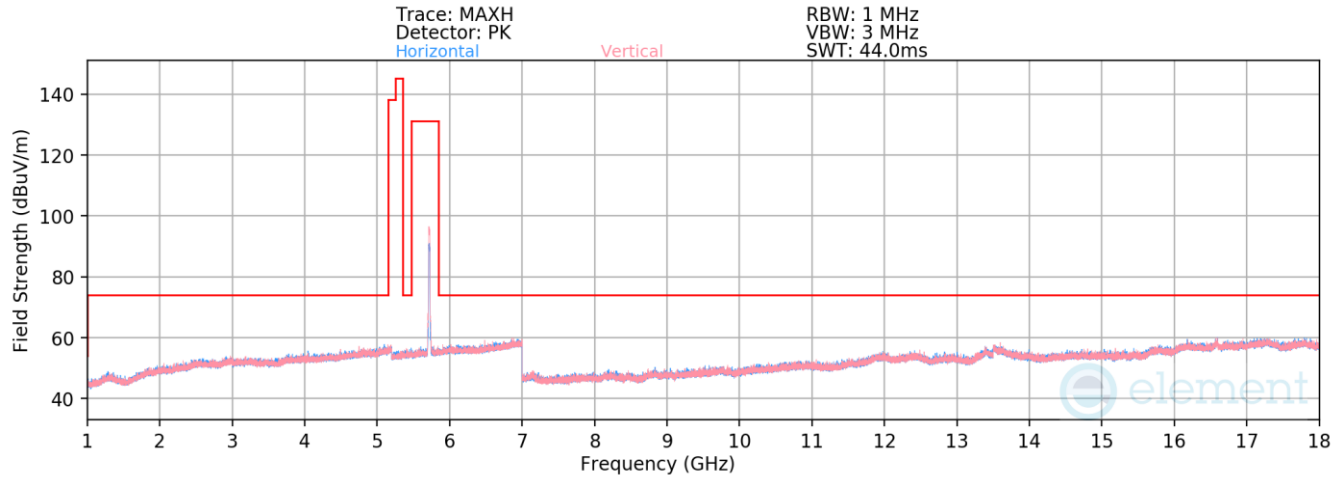

Plot 7-35. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 144)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
7158.00	Peak	V	253	220	-70.91	14.52	50.61	68.20	-17.59
* 11440.00	Average	V	-	-	-86.00	19.10	40.10	53.98	-13.88
* 11440.00	Peak	V	-	-	-74.55	19.10	51.55	73.98	-22.43
17160.00	Peak	V	-	-	-73.40	24.93	58.53	68.20	-9.67

Table 7-18. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 43 of 62

V 10.5 12/15/2021

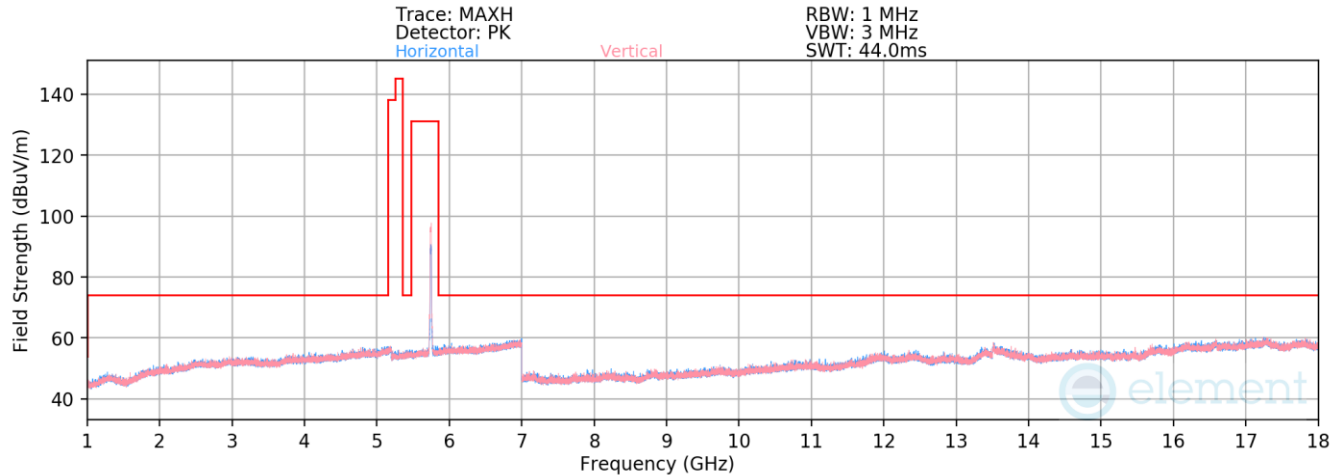

Plot 7-36. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 149)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
7183.00	Peak	V	355	68	-72.37	14.15	48.78	68.20	-19.42
* 11490.00	Average	V	-	-	-86.48	19.25	39.77	53.98	-14.21
* 11490.00	Peak	V	-	-	-75.22	19.25	51.03	73.98	-22.95
17235.00	Peak	V	-	-	-74.53	25.55	58.02	68.20	-10.18

Table 7-19. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 44 of 62

V 10.5 12/15/2021

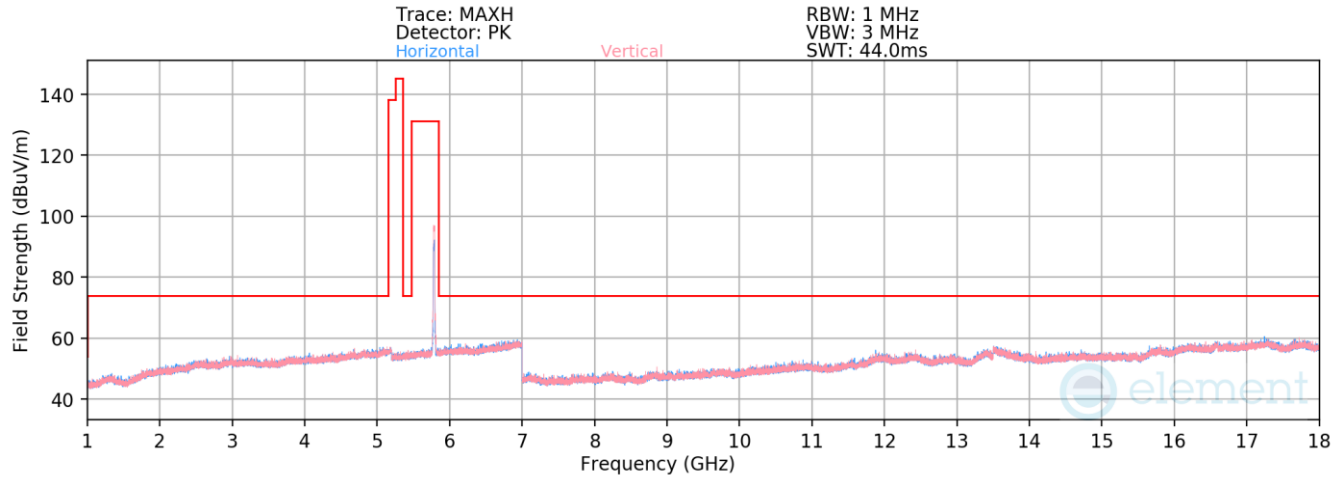

Plot 7-37. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 157)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
7239.00	Peak	V	253	201	-73.35	13.70	47.35	68.20	-20.85
* 11570.00	Average	V	-	-	-86.70	19.47	39.77	53.98	-14.21
* 11570.00	Peak	V	-	-	-75.58	19.47	50.89	73.98	-23.09
17355.00	Peak	V	-	-	-74.54	25.65	58.11	68.20	-10.09

Table 7-20. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 45 of 62

V 10.5 12/15/2021

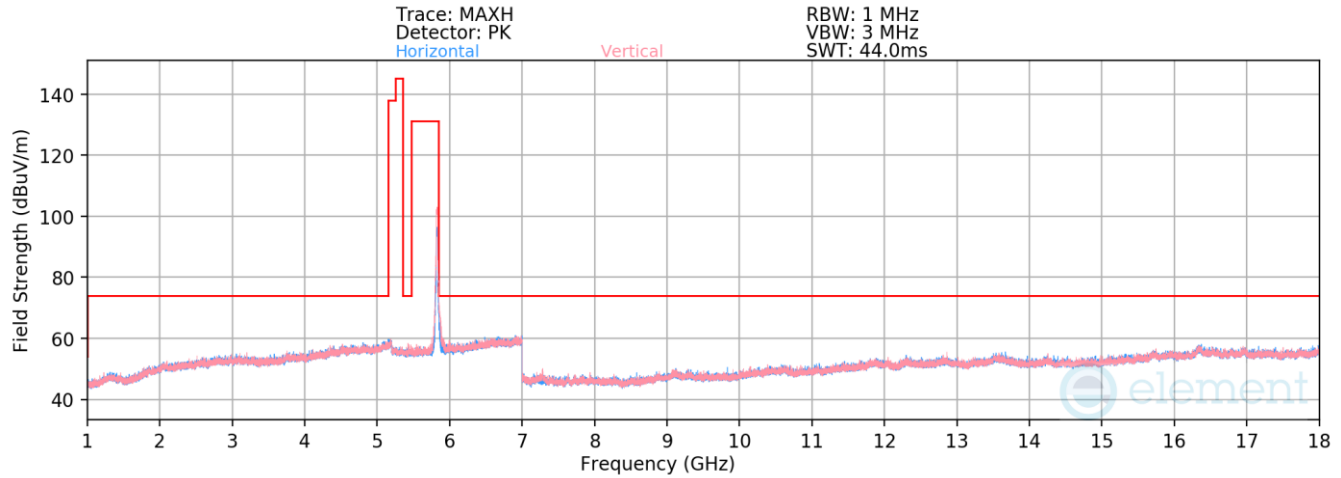

Plot 7-38. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 165)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
7289.00	Average	V	368	91	-78.30	13.66	42.36	53.98	-11.61
7289.00	Peak	V	368	91	-67.54	13.66	53.12	73.98	-20.85
* 11650.00	Average	V	-	-	-83.10	16.90	40.80	53.98	-13.18
* 11650.00	Peak	V	-	-	-71.80	16.90	52.10	73.98	-21.88
17475.00	Peak	V	-	-	-72.51	20.80	55.29	68.20	-12.91


Table 7-21. Radiated Measurements

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 46 of 62

7.6.2 Simultaneous Tx Radiated Spurious Emission

Description	Bluetooth	LTE	UNII
Antenna	FCM	FCM	FCM
Channel	78	40620	36
Operating Frequency (MHz)	2480	2593	5180
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz	11n

Table 7-22. Worst Case Simultaneous Transmission Configuration

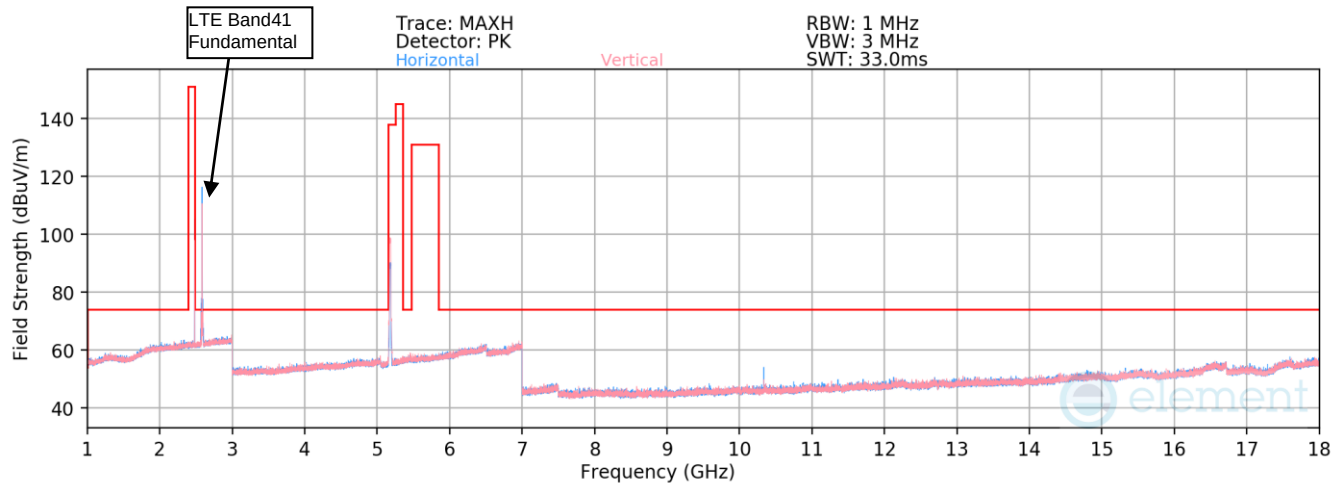

Plot 7-39. Radiated Spurious Emissions -Simultaneous Transmission 1GHz – 18GHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-68.37	16.14	54.77	73.98	-19.21
7440.00	Peak	H	109	170	-64.41	10.08	52.67	73.98	-21.31
12400.00	Peak	H	-	-	-72.72	16.30	50.58	73.98	-23.40
10360.00	Peak	H	261	106	-65.31	13.87	55.56	68.20	-12.64
15540.00	Avg	H	-	-	-84.73	19.14	41.41	53.98	-12.57
15540.00	Peak	H	-	-	-73.26	19.14	52.88	73.98	-21.10


Table 7-23. Bluetooth and UNII Harmonics Emissions Measurements in Simultaneous Transmission Mode

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Field Strength [dBμV/m]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7752.00	H	-	-	-81.09	10.17	36.1	-59.15	-25.00	-34.2
10336.00	H	319	252	-79.88	13.52	40.6	-54.59	-25.00	-29.6
12920.00	H	-	-	-83.85	17.42	40.6	-54.66	-25.00	-29.7
15504.00	H	-	-	-83.92	19.12	42.2	-53.03	-25.00	-28.0
2376.00	-	-	-	-77.23	17.50	47.3	-47.95	-25.00	-23.0
2688.00	H	221	299	-77.38	18.22	47.8	-47.39	-25.00	-22.4


Table 7-24. LTE Harmonics and Intermodulation Emissions Measurement in Simultaneous Transmission

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 47 of 62

V 10.5 12/15/2021

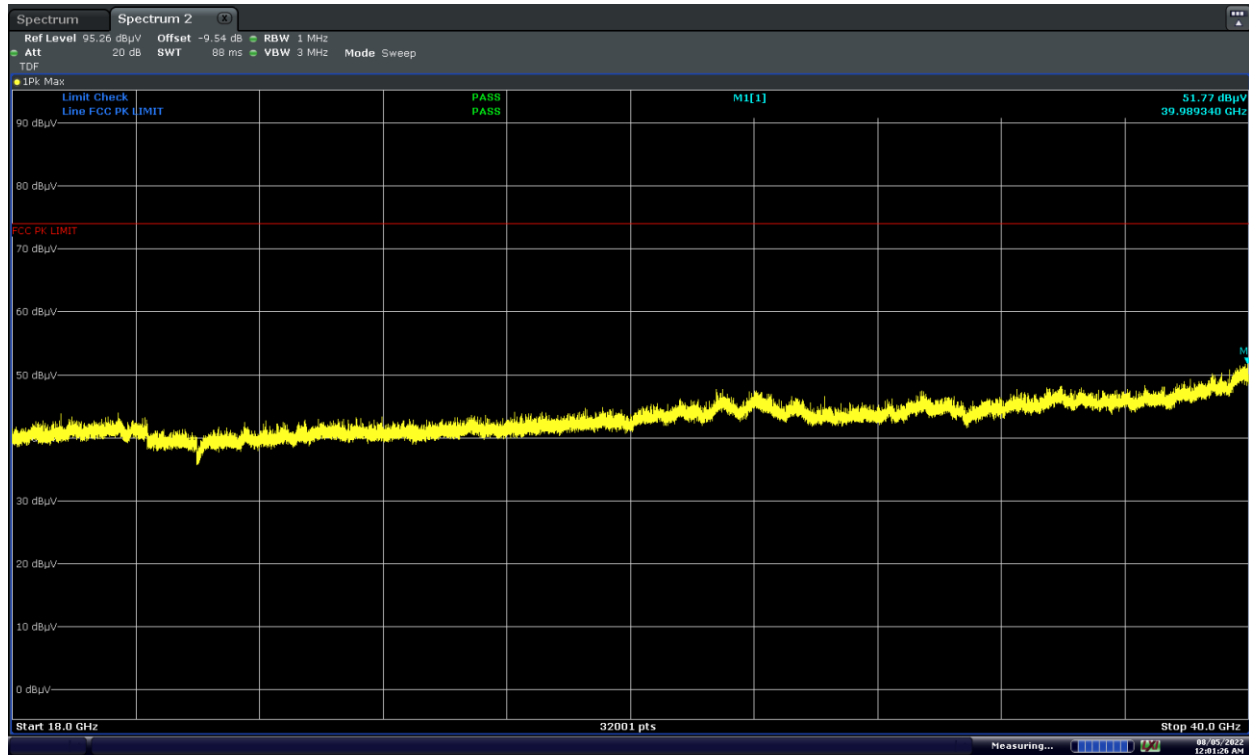

Plot 7-40. Radiated Spurious Emissions – Simultaneous Transmission 18GHz-40GHz Pol H

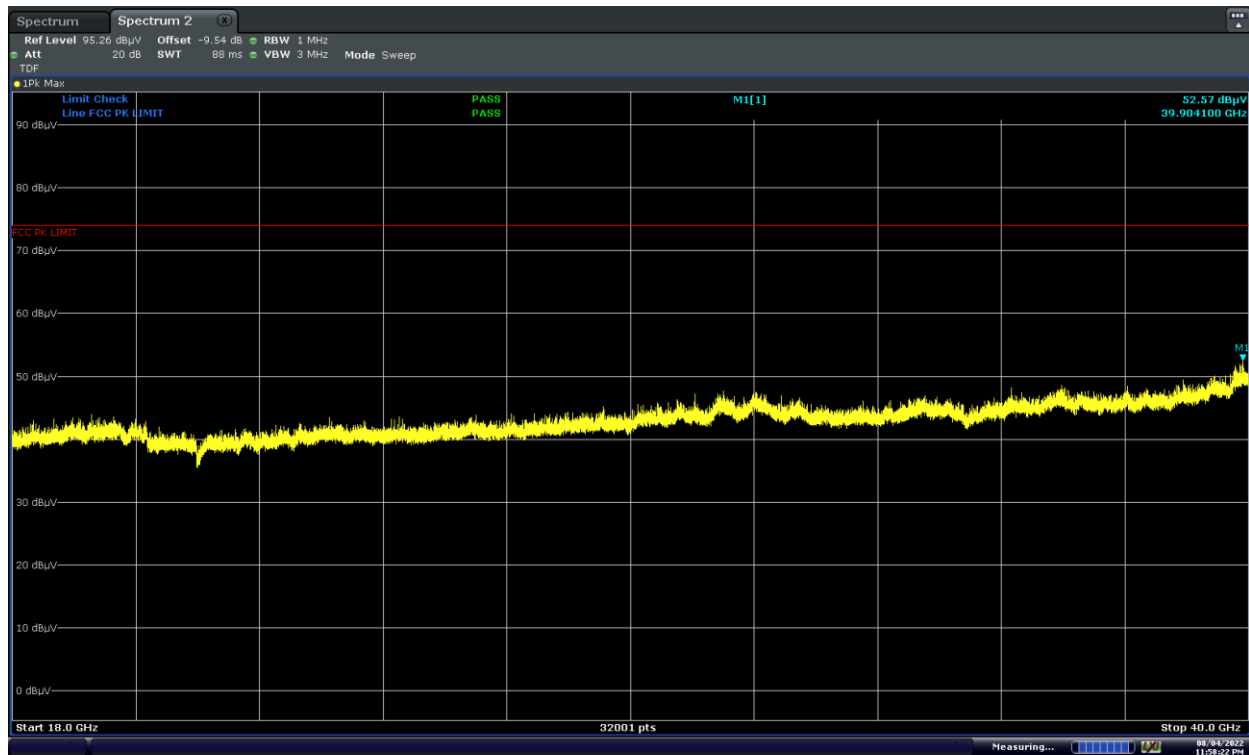

Plot 7-41. Radiated Spurious Emissions – Simultaneous Transmission 18GHz-40GHz Pol V


FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 48 of 62

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.3 Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-247 [3.2]; RSS-Gen [8.9]

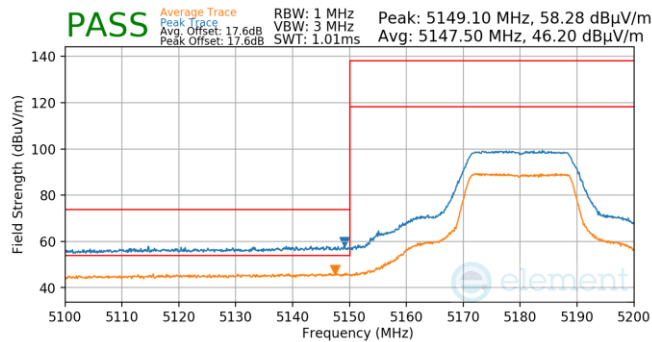


Plot 7-42. FCM (Pk & Avg, Ch.36, 802.11n, MCS0)

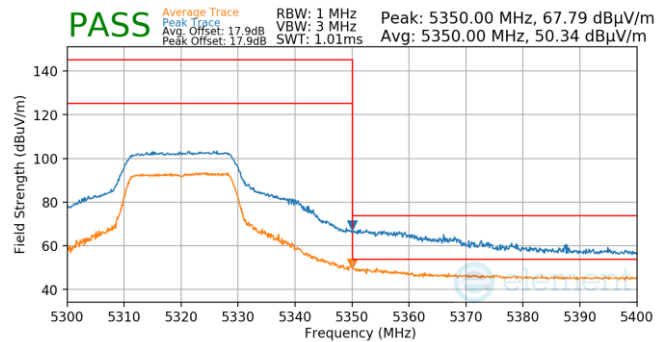


Plot 7-45. FCM (Pk & Avg, Ch.64, 802.11n, MCS7)

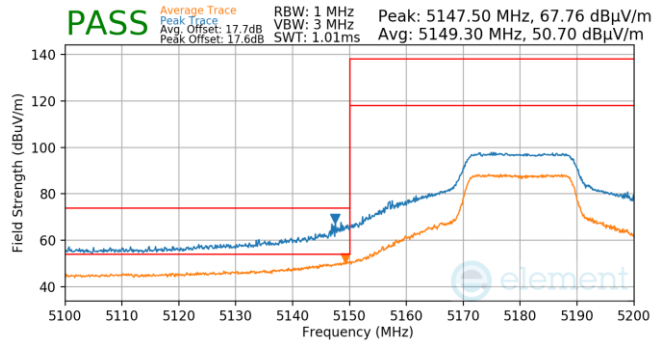


Plot 7-43. FCM (Pk & Avg, Ch.36, 802.11n, MCS7)

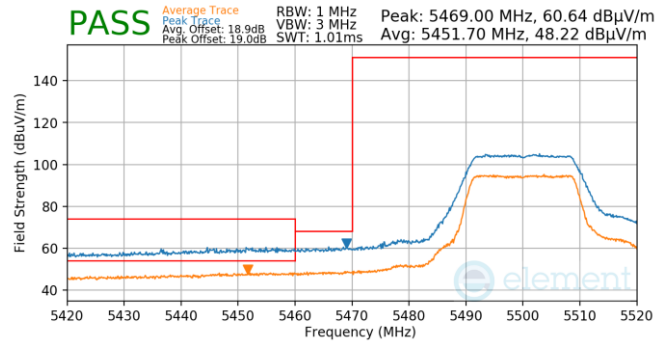

Plot 7-46. FCM (Pk & Avg, Ch.100, 802.11n, MCS0)

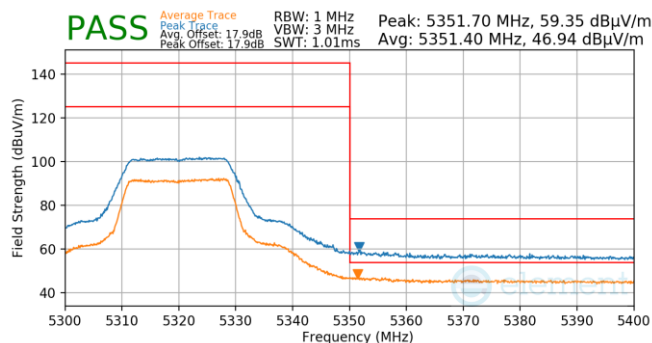

Plot 7-44. FCM (Pk & Avg, Ch.64, 802.11n, MCS0)

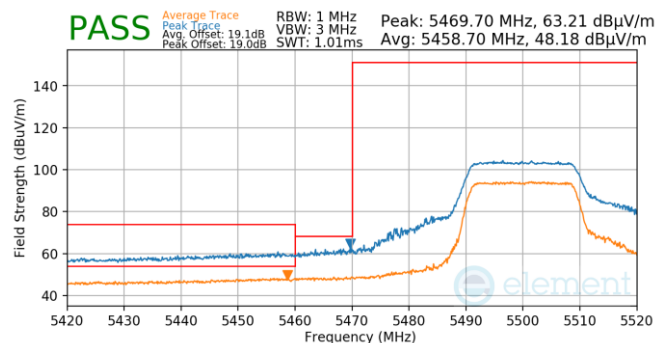


Plot 7-47. FCM (Pk & Avg, Ch.100, 802.11n, MCS7)


FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 49 of 62

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

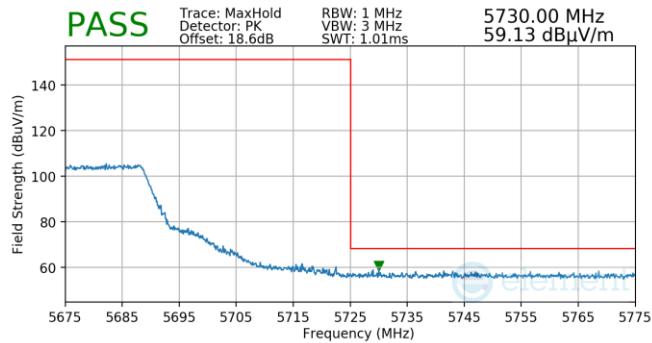


Plot 7-48. FCM (Pk, Ch.136, 802.11n, MCS0)

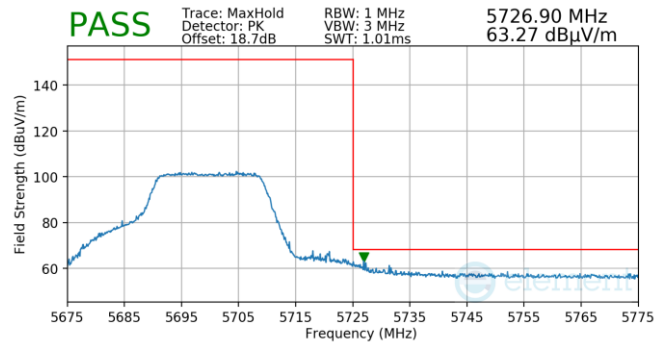


Plot 7-51. FCM (Pk, Ch.140, 802.11n, MCS7)

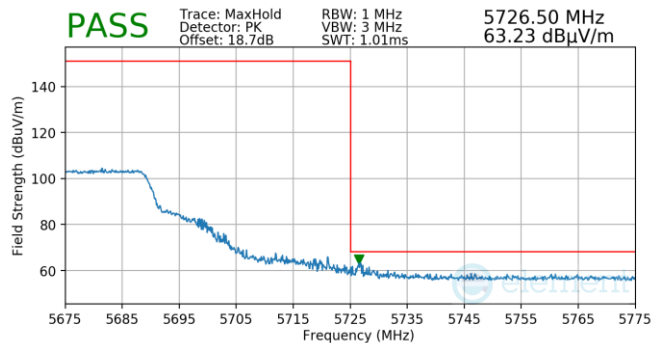


Plot 7-49. FCM (Pk, Ch.136, 802.11n, MCS7)

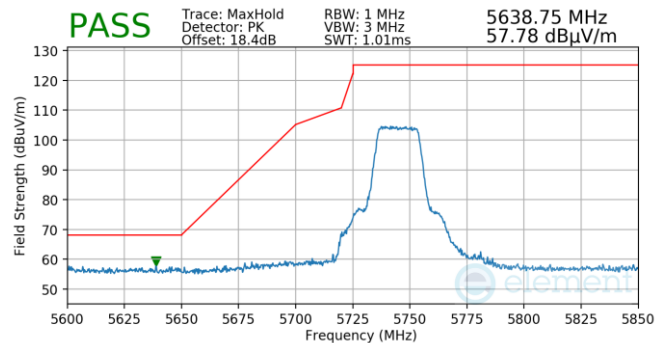

Plot 7-52. FCM (Pk, Ch.149, 802.11n, MCS0)

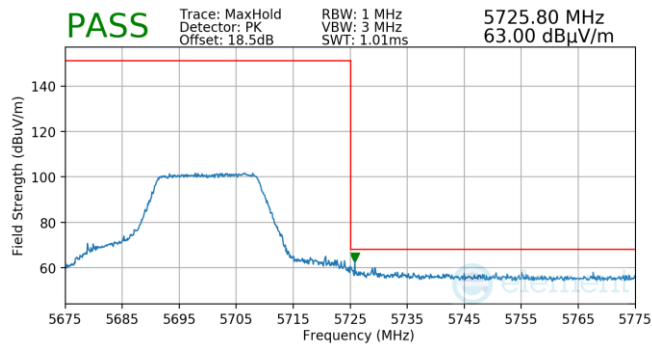


Plot 7-50. FCM (Pk, Ch.140, 802.11n, MCS0)

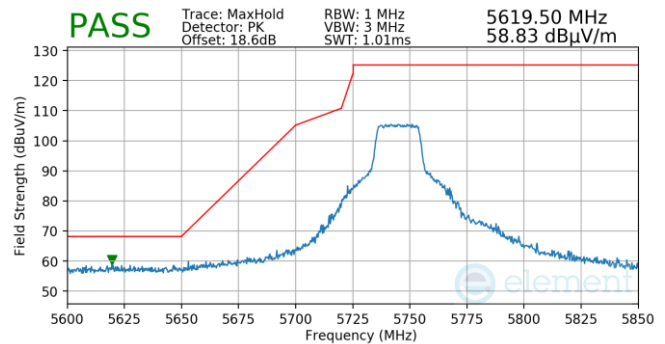


Plot 7-53. FCM (Pk, Ch.149, 802.11n, MCS7)

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 50 of 62

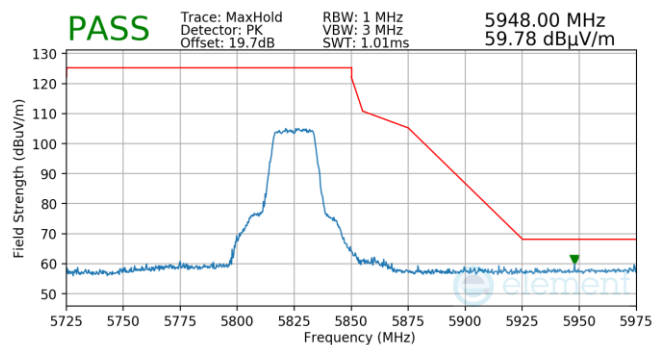

Plot 7-54. FCM (Pk, Ch.165, 802.11n, MCS0)

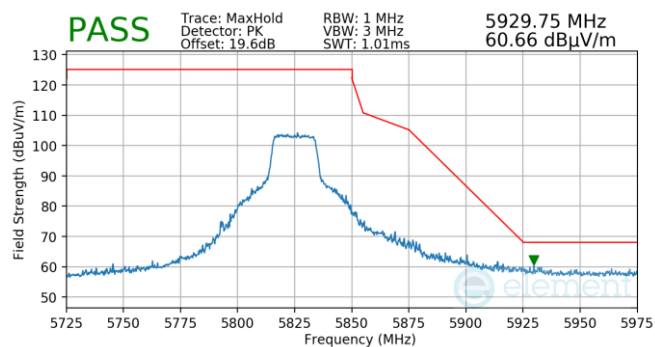

Plot 7-55. FCM (Pk, Ch.165, 802.11n, MCS7)

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 51 of 62

V 10.5 12/15/2021

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 52 of 62

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

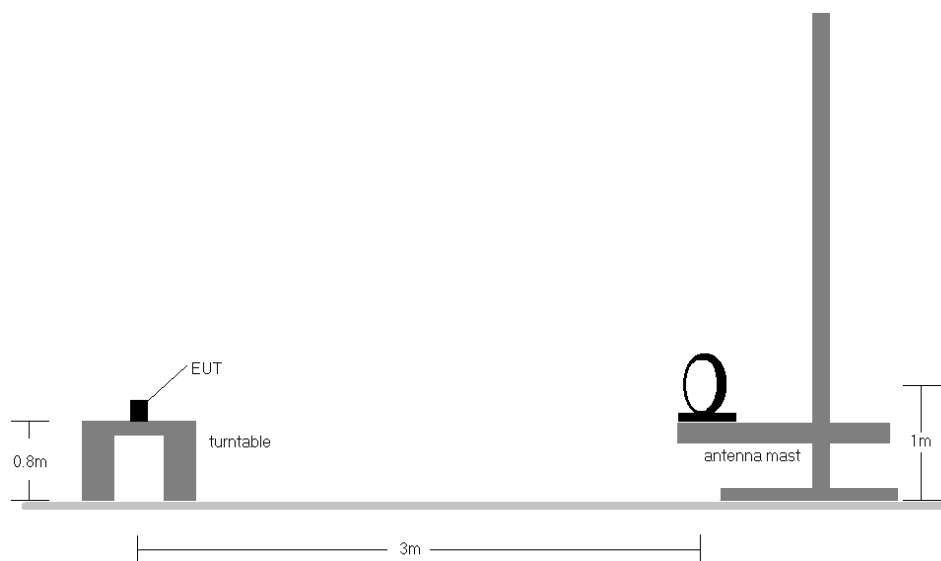


Figure 7-6. Radiated Test Setup < 30MHz

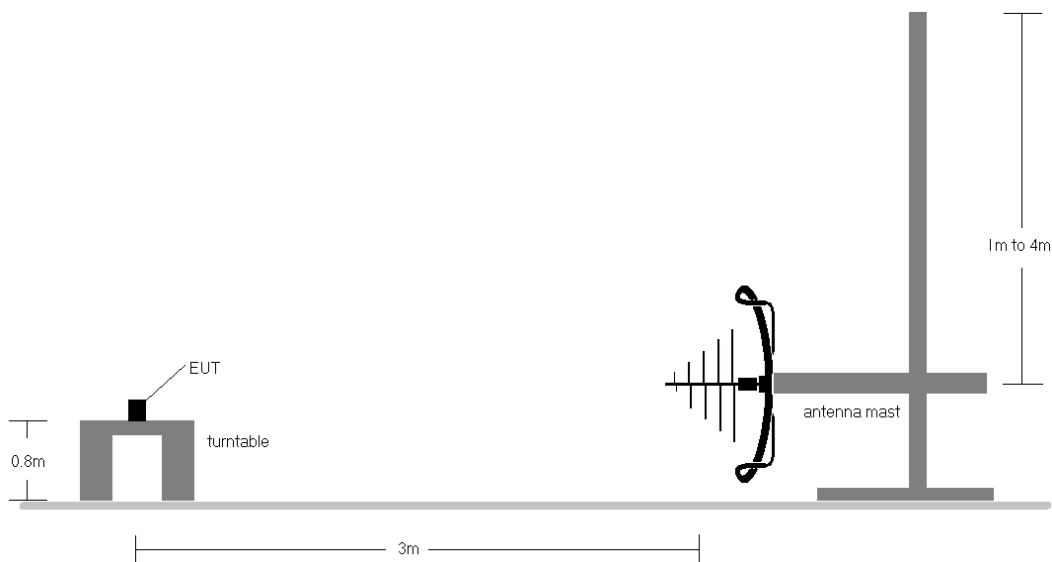


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 53 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
 - b. EUT powered by host PC via USB-C cable with magnetic charger
10. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 54 of 62

V 10.5 12/15/2021

7.7.1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

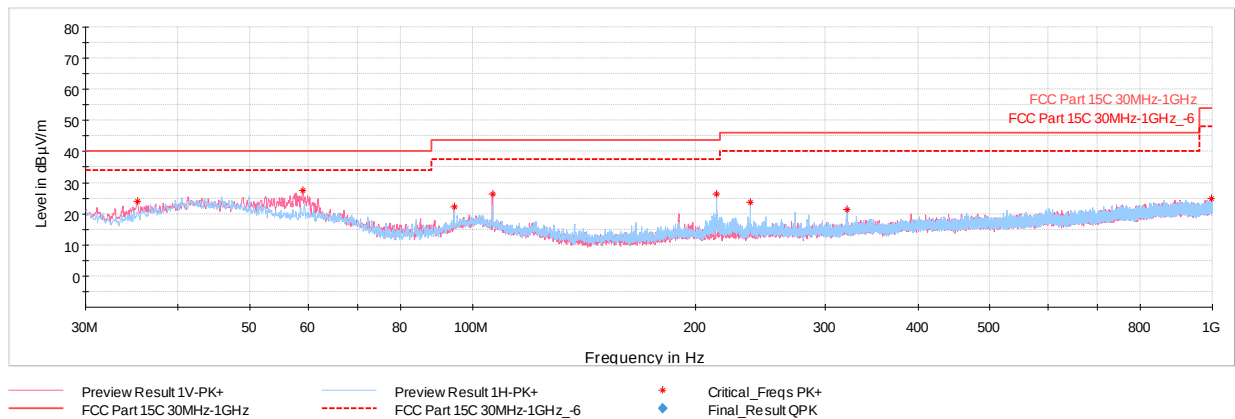

Plot 7-56. Radiated Spurious Emissions below 1GHz 802.11n, Ch.40 with AC/DC Adapter & Magnetic Charger

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
35.24	Max Peak	V	100	51	-64.33	-18.65	24.02	40.00	-15.98
59.00	Max Peak	V	100	30	-62.76	-16.74	27.50	40.00	-12.50
94.46	Max Peak	V	100	239	-65.69	-19.06	22.25	43.52	-21.27
106.44	Max Peak	V	100	175	-62.19	-18.58	26.23	43.52	-17.29
213.77	Max Peak	H	100	231	-62.82	-17.93	26.25	43.52	-17.27
237.34	Max Peak	H	100	265	-66.54	-16.64	23.82	46.02	-22.20

Table 7-26. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.40 with AC/DC Adapter & Magnetic Charger

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 55 of 62


V 10.5 12/15/2021

7.7.2 Simultaneous TX Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

Description	Bluetooth	UNII
Antenna	FCM	FCM
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	11n

Table 7-27. Worst Case Simultaneous Transmission Configuration

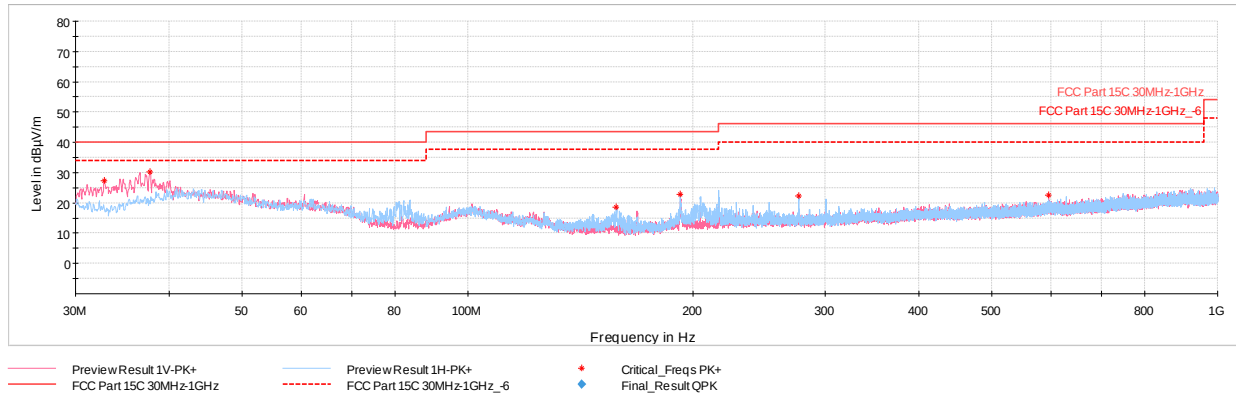

Plot 7-57. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter) & Magnetic Charger

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
32.81	Max Peak	V	100	28	-74.78	-19.67	12.55	40.00	-27.45
37.66	Max Peak	V	100	271	-79.12	-18.07	9.81	40.00	-30.19
157.70	Max Peak	H	200	199	-61.41	-20.65	24.94	43.52	-18.58
192.18	Max Peak	H	100	251	-68.09	-18.11	20.80	43.52	-22.72
276.38	Max Peak	H	100	251	-67.48	-15.76	23.76	46.02	-22.26
595.36	Max Peak	V	300	254	-74.96	-8.45	23.59	46.02	-22.43

Table 7-28. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter) & Magnetic Charger

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 56 of 62

V 10.5 12/15/2021

7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-29. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 57 of 62

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

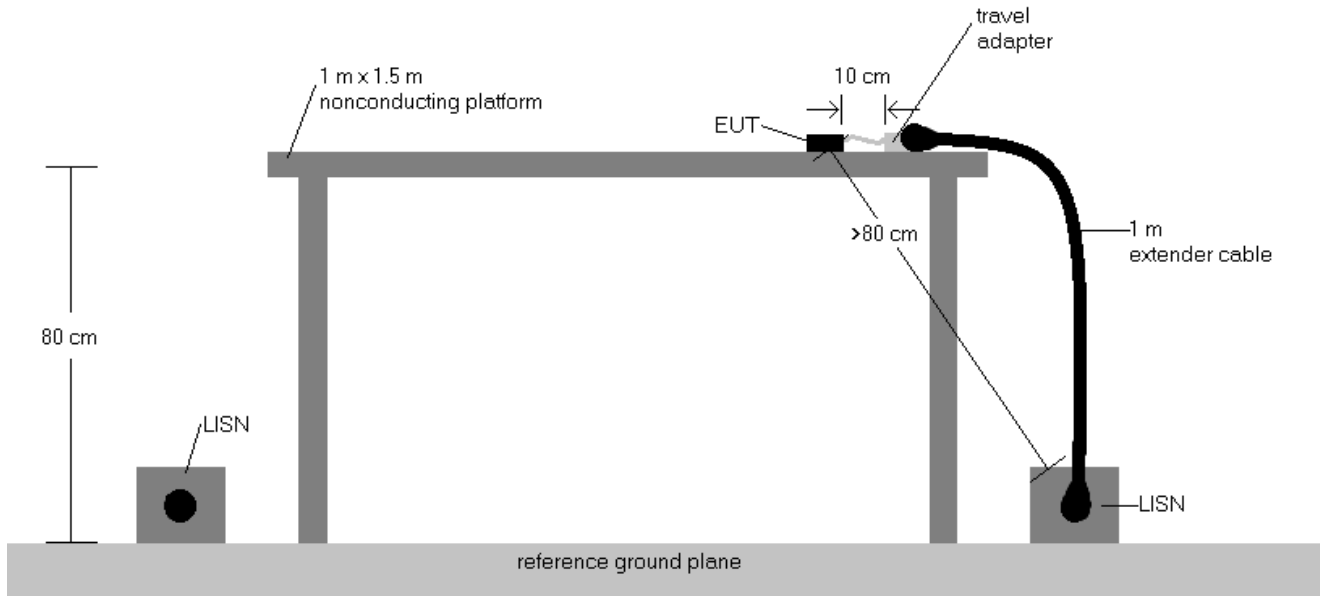



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
 - b. EUT powered by host PC via USB-C cable with magnetic charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 58 of 62

V 10.5 12/15/2021

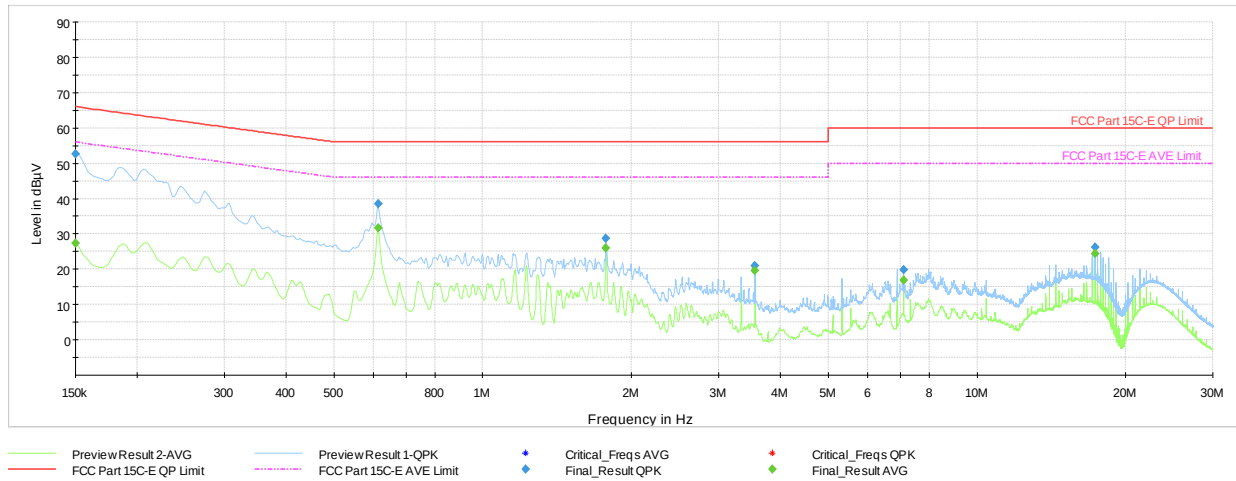

Plot 7-58. AC Line Conducted Plot with 802.11n- Ch.40 (L1), with Laptop & Magnetic Charger


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.150	FINAL	—	27.32	56.00	-28.68	L1	GND
0.150	FINAL	52.6	—	66.00	-13.37	L1	GND
0.614	FINAL	—	31.64	46.00	-14.36	L1	GND
0.614	FINAL	38.4	—	56.00	-17.57	L1	GND
1.777	FINAL	—	25.93	46.00	-20.07	L1	GND
1.777	FINAL	28.8	—	56.00	-27.20	L1	GND
3.557	FINAL	20.9	—	56.00	-35.09	L1	GND
3.557	FINAL	—	19.50	46.00	-26.50	L1	GND
7.112	FINAL	19.9	—	60.00	-40.08	L1	GND
7.112	FINAL	—	16.86	50.00	-33.14	L1	GND
17.333	FINAL	—	24.33	50.00	-25.67	L1	GND
17.333	FINAL	26.2	—	60.00	-33.76	L1	GND

Table 7-30. AC Line Conducted Data with 802.11n- Ch.40 (L1) with Laptop & Magnetic Charger

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 59 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

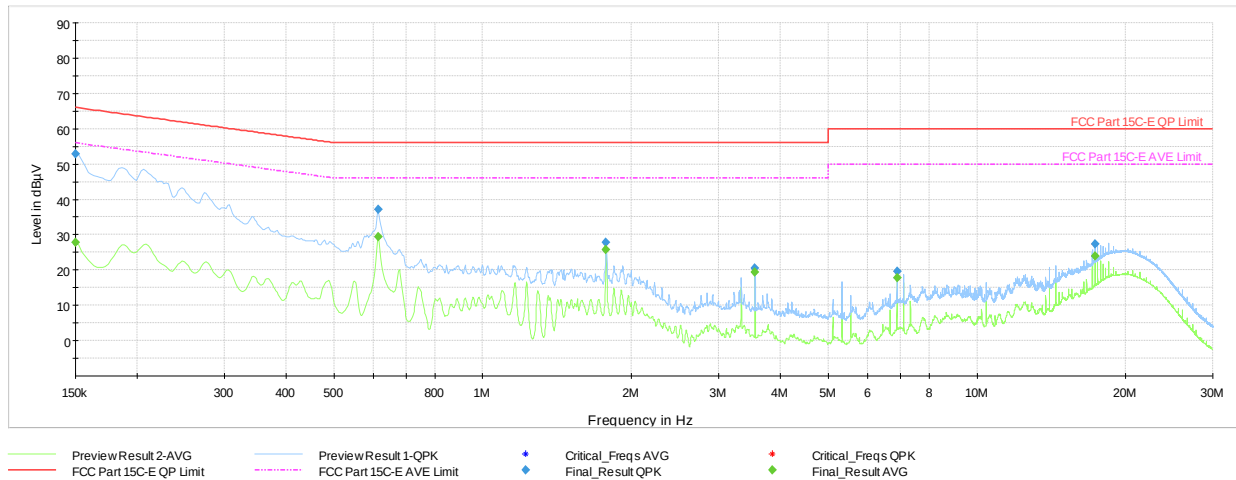

Plot 7-59. AC Line Conducted Plot with 802.11n– Ch.40 (N), with Laptop & Magnetic Charger

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.150	FINAL	—	27.88	56.00	-28.12	N	GND
0.150	FINAL	52.8	—	66.00	-13.22	N	GND
0.614	FINAL	37.1	—	56.00	-18.92	N	GND
0.616	FINAL	—	29.32	46.00	-16.68	N	GND
1.777	FINAL	—	25.78	46.00	-20.22	N	GND
1.777	FINAL	27.8	—	56.00	-28.18	N	GND
3.557	FINAL	20.5	—	56.00	-35.51	N	GND
3.557	FINAL	—	19.45	46.00	-26.55	N	GND
6.889	FINAL	19.6	—	60.00	-40.40	N	GND
6.889	FINAL	—	17.73	50.00	-32.27	N	GND
17.333	FINAL	—	23.86	50.00	-26.14	N	GND
17.333	FINAL	27.4	—	60.00	-32.57	N	GND

Table 7-31. AC Line Conducted Data with 802.11n– Ch.40 (N), with Laptop & Magnetic Charger

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 60 of 62

V 10.5 12/15/2021

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Watch** **FCC ID: BCG-A2772** and **IC: 579C-A2772** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCG-A2772 IC: 579C-A2772		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 61 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

9.0 APPENDIX A

Antenna gains provided by manufacturer:

WiFi/BT 2.4GHz, WiFi 5GHz, UWB Antenna Gain (FCM), Type: IFA		
Frequency (MHz)	Horizontal (dBi)	Vertical (dBi)
2412	-8.3	-8.0
2442	-8.0	-7.6
2472	-7.6	-7.4
5180	-11.1	-10.1
5260	-10.9	-9.6
5320	-9.8	-8.4
5500	-8.1	-6.4
5600	-8.5	-6.2
5700	-8.1	-5.3
5745	-7.6	-4.8
5785	-7.7	-4.7
5825	-7.9	-4.7
6250	-10.1	-7.1
6375	-10.4	-6.8
6500	-10.6	-6.9
6625	-11.1	-7.0
6750	-11.3	-6.7
7750	-11.3	-6.2
7875	-12.7	-7.4
8000	-13.3	-7.6
8125	-12.8	-7.7
8250	-12.8	-7.4

Table 9-1. Antenna Gains

FCC ID: BCG-A2772 IC: 579C-A2772	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090038-11.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 62 of 62

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.