



Element Materials Technology

(formerly PCTEST)

18855 Adams Court, Morgan Hill, CA 95037 USA

Tel. 408.538.5600

<http://www.element.com>



MEASUREMENT REPORT

FCC PART 15.407 / ISED RSS-247 UNII 802.11a/n

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

6/7/2023 - 8/11/2023

Test Report Issue Date:

8/11/2023

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2305110022-09.BCG

| | |
|-------------------|-------------------|
| FCC ID: | BCG-A2980 |
| IC: | 579C-A2980 |
| APPLICANT: | Apple Inc. |

Application Type: Certification

Model/HVIN: A2980

EUT Type: Watch

Frequency Range: 5180 – 5825MHz

Modulation Type: OFDM

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15 Subpart E (15.407)

ISED Specification: RSS-247 Issue 3

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President



| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 1 of 61 |


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


T A B L E O F C O N T E N T S

| | | |
|-----|--|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope..... | 4 |
| 1.2 | Element Materials Technology Test Location | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Antenna Description..... | 6 |
| 2.4 | Test Support Equipment..... | 7 |
| 2.5 | Test Configuration..... | 8 |
| 2.6 | Software and Firmware | 8 |
| 2.7 | EMI Suppression Device(s)/Modifications..... | 8 |
| 3.0 | DESCRIPTION OF TESTS | 9 |
| 3.1 | Evaluation Procedure..... | 9 |
| 3.2 | AC Line Conducted Emissions | 9 |
| 3.3 | Radiated Emissions..... | 10 |
| 3.4 | Environmental Conditions..... | 10 |
| 4.0 | ANTENNA REQUIREMENTS | 11 |
| 5.0 | MEASUREMENT UNCERTAINTY | 12 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA..... | 13 |
| 7.0 | TEST RESULTS | 14 |
| 7.1 | Summary..... | 14 |
| 7.2 | 26dB & 99% Bandwidth Measurement – 802.11a/n..... | 16 |
| 7.3 | 6dB & 99% Bandwidth Measurement – 802.11a/n..... | 20 |
| 7.4 | Conducted Output Power and Max EIRP Measurement – 802.11a/n..... | 23 |
| 7.5 | Maximum Power Spectral Density – 802.11a/n | 25 |
| 7.6 | Radiated Spurious Emissions – Above 1GHz | 31 |
| 7.7 | Radiated Spurious Emissions – Below 1GHz | 52 |
| 7.8 | AC Line-Conducted Emissions Measurement..... | 57 |
| 8.0 | CONCLUSION..... | 61 |

| | | | |
|---|--|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 2 of 61 |



MEASUREMENT REPORT



| UNII Band | Channel Bandwidth (MHz) | Mode | Tx Frequency (MHz) | FCM | |
|-----------|-------------------------|----------------|--------------------|-----------------|------------------|
| | | | | Max. Power (mW) | Max. Power (dBm) |
| 1 | 20 | 802.11a | 5180 - 5240 | 48.195 | 16.83 |
| | | 802.11n (MCS0) | | 48.865 | 16.89 |
| | | 802.11n (MCS7) | | 31.117 | 14.93 |
| 2A | 20 | 802.11a | 5260 - 5320 | 49.888 | 16.98 |
| | | 802.11n (MCS0) | | 49.431 | 16.94 |
| | | 802.11n (MCS7) | | 31.189 | 14.94 |
| 2C | 20 | 802.11a | 5500 - 5720 | 49.204 | 16.92 |
| | | 802.11n (MCS0) | | 49.774 | 16.97 |
| | | 802.11n (MCS7) | | 31.261 | 14.95 |
| 3 | 20 | 802.11a | 5745 - 5825 | 48.529 | 16.86 |
| | | 802.11n (MCS0) | | 49.204 | 16.92 |
| | | 802.11n (MCS7) | | 30.974 | 14.91 |

FCC EUT Overview

| UNII Band | Channel Bandwidth (MHz) | Mode | Tx Frequency (MHz) | FCM | |
|-----------|-------------------------|----------------|--------------------|-----------------|------------------|
| | | | | Max. Power (mW) | Max. Power (dBm) |
| 1 | 20 | 802.11a | 5180 - 5240 | 38.994 | 15.91 |
| | | 802.11n (MCS0) | | 38.994 | 15.91 |
| | | 802.11n (MCS7) | | 31.117 | 14.93 |
| 2A | 20 | 802.11a | 5260 - 5320 | 49.888 | 16.98 |
| | | 802.11n (MCS0) | | 49.431 | 16.94 |
| | | 802.11n (MCS7) | | 31.189 | 14.94 |
| 2C | 20 | 802.11a | 5500 - 5720 | 49.204 | 16.92 |
| | | 802.11n (MCS0) | | 49.774 | 16.97 |
| | | 802.11n (MCS7) | | 31.261 | 14.95 |
| 3 | 20 | 802.11a | 5745 - 5825 | 48.529 | 16.86 |
| | | 802.11n (MCS0) | | 49.204 | 16.92 |
| | | 802.11n (MCS7) | | 30.974 | 14.91 |

ISED EUT Overview

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 3 of 61 V 10.5 12/15/2021 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology Morgan Hill is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology Morgan Hill facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 4 of 61 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2980** and **IC: 579C-A2980**. The test data contained in this report pertains only to the emissions due to the EUT's UNII 802.11a/n transmitter.

Test Device Serial No.: QTJ4C3QK7L, NGX00RX2QX, M40C4L6W77, FN6GTJ000DV00000MT

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n WLAN, 802.11a/n UNII, 802.15.4 ab-NB, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter

| Band 1 | | Band 2A | | Band 2C | | Band 3 | |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 36 | 5180 | 52 | 5260 | 100 | 5500 | 149 | 5745 |
| : | : | : | : | : | : | : | : |
| 42 | 5210 | 56 | 5280 | 116 | 5580 | 157 | 5785 |
| : | : | : | : | : | : | : | : |
| 48 | 5240 | 64 | 5320 | 144 | 5720 | 165 | 5825 |

Table 2-1. 802.11a / 802.11n (20MHz) Frequency / Channel Operations

Notes:

1. 5GHz NII operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Measured Duty Cycles | | |
|----------------------|-----------------|----------------|
| 802.11 Mode/Band | | Duty Cycle [%] |
| | | FCM |
| 5GHz | a (Low Rate) | 86.6 |
| | n (HT20) (MCS0) | 98.6 |
| | n (HT20) (MCS7) | 75.6 |

Table 2-2. Measured Duty Cycles

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 5 of 61 |

2. This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

| Simultaneous Tx Config | Antenna FCM | | | | |
|------------------------|--------------|--------------------------|-----------------|------------|-----------|
| | WLAN | Bluetooth | 802.15.4ab - NB | UNII | UWB |
| | 802.11 b/g/n | BDR, EDR, HDR4/8, LE1/2M | O-QPSK | 802.11 a/n | Ch.5/Ch.9 |
| Config 1 | ✓ | ✗ | ✗ | ✗ | ✓ |
| Config 2 | ✗ | ✓ | ✗ | ✗ | ✓ |
| Config 3 | ✗ | ✓ | ✓ | ✗ | ✗ |
| Config 4 | ✓ | ✗ | ✓ | ✗ | ✗ |
| Config 5 | ✗ | ✓ | ✗ | ✓ | ✗ |

Table 2-3. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

| Frequency [GHz] | Antenna Gain (dBi) |
|-----------------|--------------------|
| | FCM |
| 5.150 – 5.250 | -5.7 |
| 5.250 – 5.350 | -5.0 |
| 5.470 – 5.725 | -3.9 |
| 5.725 – 5.850 | -3.8 |

Table 2-4. Highest Antenna Gain

| | | | |
|---|---|------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 6 of 61 |



2.4 Test Support Equipment

| Item | Equipment Description | Model: | Serial: | Notes: |
|------|--|--|--|--------|
| 1 | Apple Macbook w/AC/DC Adapter | Model: A1398 Model: A1435 | S/N: FVFDHG8TP3XY S/N: N/A | |
| 2 | Apple USB-C cable w/ Charging Dock w/ Cradle | Model: N/A Model: A2921 Model: N/A | S/N: N/A S/N: DQ812910CU008V22F S/N: CYV10420060A2LE03MP2C | |
| 3 | Apple Magnetic Charger | Model: A2515 | S/N: DLC217301Z91NR11B | |
| 4 | Pathfinder Mocha X3100 SIP Socket | Model: 920-13353-01 Model: P1 N20X B PF 307 | S/N: DLCGMW0007D00000N7 S/N: FN6GUA000JD00000M7 | |
| 5 | DC Power Supply | Model: KPS3010D | S/N: N/A | |
| 6 | Store Sample Wristband | Model: N/A | S/N: DLC316300CU1QGKA2 | |

Table 2-5. Test Support Equipment List

| | | | |
|---|-------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 7 of 61 |

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

The worst case configuration was investigated for various types of non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
- EUT powered by host PC via USB-C cable with magnetic charger

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

| Description | Bluetooth | UNII |
|---------------------------|-----------|---------|
| Antenna | FCM | FCM |
| Channel | 78 | 36 |
| Operating Frequency (MHz) | 2480 | 5180 |
| Mode/Modulation | GFSK ePA | 802.11n |

Table 2-6. Worst Case Simultaneous Transmission Configuration

2.6 Software and Firmware

The test was conducted with firmware version watchOS 10.0 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 8 of 61 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....**None**

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 9 of 61 |

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | | |
|---|---|--------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | | Page 10 of 61 |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 11 of 61 |

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|------------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.77 |
| Line Conducted Disturbance | 2.70 |
| Radiated Disturbance (<30MHz) | 4.38 |
| Radiated Disturbance (30MHz -1GHz) | 4.75 |
| Radiated Disturbance (1-18GHz) | 5.20 |
| Radiated Disturbance (>18GHz) | 4.72 |

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 12 of 61 |

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|----------------------|-------------|--|-----------|--------------|-----------|---------------|
| Agilent Technologies | N9030A | 3Hz-44GHz PXA Signal Analyzer | 6/21/2023 | Annual | 6/21/2024 | MY49430244 |
| Anritsu | ML2495A | Power Meter | 6/13/2023 | Annual | 6/13/2024 | 1039008 |
| Anritsu | MA2411B | Pulse Power Sensor | 6/14/2023 | Annual | 6/14/2024 | 1911105 |
| Anritsu | MA2411B | Pulse Power Sensor | 8/31/2022 | Annual | 8/31/2023 | 1911106 |
| ATM | 180-442A-KF | 20dB Nominal Gain Horn Antenna | 11/1/2022 | Annual | 11/1/2023 | T058701-01 |
| ETS-Lindgren | 3117 | Double Ridged Guide Antenna (1-18 GHz) | 3/30/2023 | Annual | 3/30/2024 | 00218555 |
| Keysight Technology | N9040B | UXA Signal Analyzer | 3/10/2023 | Annual | 3/10/2024 | MY57212015 |
| Rohde & Schwarz | TS-PR18 | Pre-Amplifier (1GHz - 18GHz) | 6/2/2023 | Annual | 6/2/2024 | 100050 |
| Rohde & Schwarz | FSV40 | Signal Analyzer (10Hz-40GHz) | 5/11/2023 | Annual | 5/11/2024 | 101619 |
| Rohde & Schwarz | ESW44 | EMI Test Receiver | 6/6/2023 | Annual | 6/6/2024 | 101668 |
| Rohde & Schwarz | TS-PR8 | Pre-Amplifier (30MHz - 8GHz) | 6/22/2023 | Annual | 6/22/2024 | 102356 |
| Rohde & Schwarz | TS-PR1840 | Pre-Amplifier (18GHz - 40GHz) | 6/2/2023 | Annual | 6/2/2024 | 100050 |
| Rohde & Schwarz | HFH2-Z2 | Loop Antenna | 5/1/2023 | Annual | 5/1/2024 | 100519 |
| Rohde & Schwarz | ENV216 | Two-Line V-Network | 6/8/2023 | Annual | 6/8/2024 | 192052 |
| Schwarzbeck | VULB 9162 | Bilog Antenna (30MHz - 6GHz) | 4/17/2023 | Annual | 4/17/2024 | 00304 |

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 13 of 61 |

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A2980
 IC: 579C-A2980
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

| FCC Part Section(s) | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|------------------------------------|----------------|---|--|----------------|-------------|--|
| 15.407 | RSS-Gen [6.7] | 26dB Bandwidth | N/A | CONDUCTED | N/A | Section 7.2 |
| 15.407(e) | RSS-Gen [6.7] | 6dB Bandwidth | >500kHz(5725-5850MHz) | | PASS | Section 7.3 |
| 2.1049 | RSS-Gen [6.7] | Occupied Bandwidth | N/A | | PASS | Section 7.2, Section 7.3 |
| 15.407 (a.1.iv), (a.2), (a.3) | RSS-247 [6.2] | Maximum Conducted Output Power | Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2]) | | PASS | Section 7.4 |
| 15.407 (a.1.iv), (a.2), (a.3) | RSS-247 [6.2] | Maximum Power Spectral Density | Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2]) | | PASS | Section 7.5 |
| 15.407(h) | RSS-247 [6.3] | Dynamic Frequency Selection | See DFS Test Report | | PASS | See DFS Test Report (1C23051100 22-07.BCG) |
| 15.407(b.1), (2), (3), (4) | RSS-247 [6.2] | Undesirable Emissions | Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2]) | RADIATED | PASS | Section 7.6 |
| 15.205, 15.407(b.1), (4), (5), (6) | RSS-Gen [8.9] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | | PASS | Section 7.6, 7.7 |
| 15.207 | RSS-Gen [8.8] | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 (RSS-Gen [8.8]) limits | LINE CONDUCTED | PASS | Section 7.8 |

Table 7-1. Summary of Test Results

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 14 of 61 |

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 7.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 2.0.0.
- 6) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 15 of 61 |

7.2 26dB & 99% Bandwidth Measurement – 802.11a/n

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All modes were investigated and only the worst case are reported.





| | | | |
|---|---|---------------------------------------|------------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 16 of 61 V 10.5 12/15/2021 |

26dB & 99% Bandwidth Measurements

| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] | Measured 26dB Bandwidth [MHz] |
|---------|-----------------|-------------|-------------|------------------|---------------------------------------|-------------------------------|
| Band 1 | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | 19.41 | 24.73 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | 19.30 | 24.91 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | 19.31 | 24.75 |
| Band 2A | 5260 | 52 | n (20MHz) | 6.5/7.2 (MCS0) | 19.34 | 25.21 |
| | 5280 | 56 | n (20MHz) | 6.5/7.2 (MCS0) | 19.29 | 24.61 |
| | 5320 | 64 | n (20MHz) | 6.5/7.2 (MCS0) | 19.26 | 24.27 |
| Band 2C | 5500 | 100 | n (20MHz) | 6.5/7.2 (MCS0) | 19.32 | 24.38 |
| | 5580 | 116 | n (20MHz) | 6.5/7.2 (MCS0) | 19.34 | 25.10 |
| | 5720 | 144 | n (20MHz) | 6.5/7.2 (MCS0) | 19.33 | 25.29 |

Table 7-2. Conducted Bandwidth Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 17 of 61 |

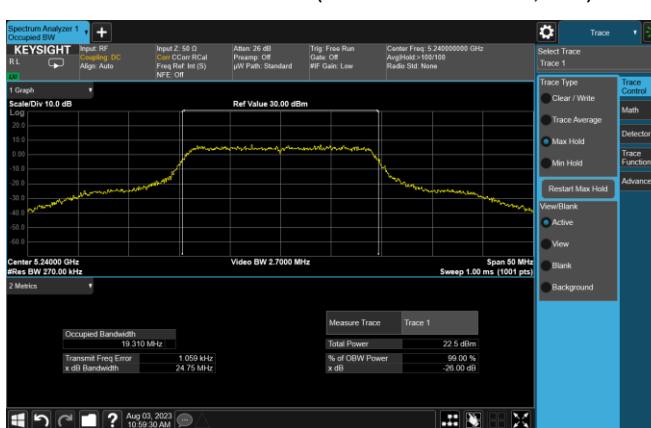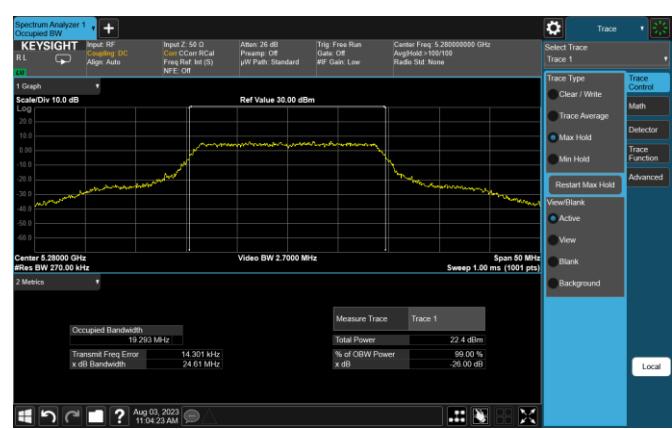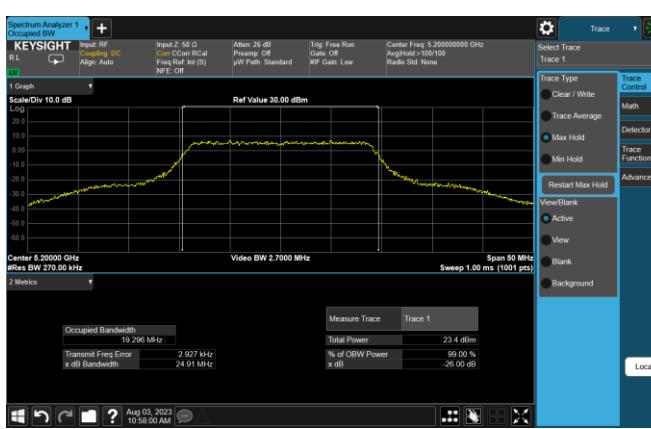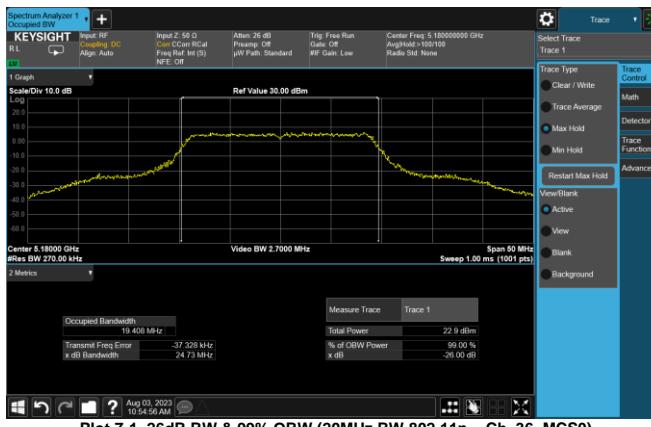

| | |
|--|---|
| FCC ID: BCG-A2980 |  element |
| IC: 579C-A2980 | |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 |


**MEASUREMENT REPORT
(CERTIFICATION)**

Approved by:
Technical Manager


Page 18 of 61

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

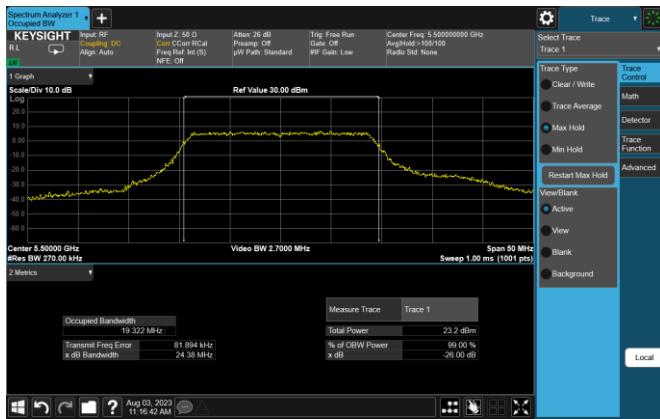

Plot 7-7. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 100, MCS0)

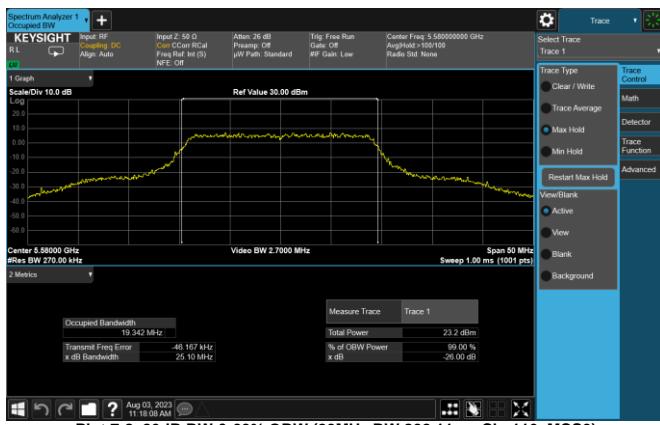

Plot 7-8. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 116, MCS0)

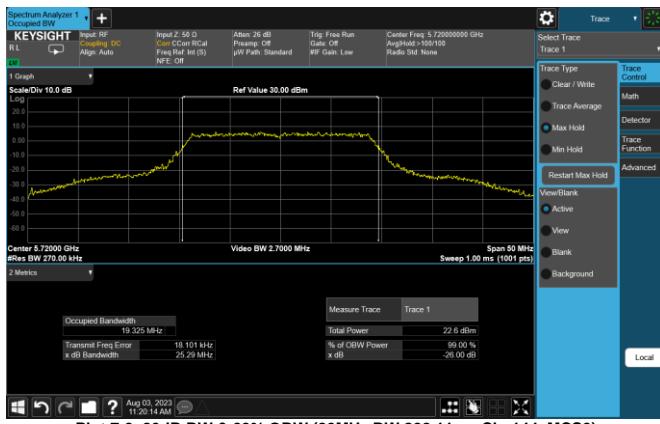

Plot 7-9. 26dB BW & 99% OBW (20MHz BW 802.11n – Ch. 144, MCS0)

| | | | |
|--|--|---|--|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 19 of 61 |

7.3 6dB & 99% Bandwidth Measurement – 802.11a/n

§2.1049; §15.407 (e); RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be \geq 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. All modes were investigated and only the worst case are reported.



| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 20 of 61 |

6dB & 99% Bandwidth Measurements

| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass / Fail |
|--------|-----------------|-------------|-------------|------------------|---------------------------------------|------------------------------|-----------------------------|-------------|
| Band 3 | 5745 | 149 | n (20MHz) | 6.5/7.2 (MCS0) | 19.13 | 17.64 | 0.50 | Pass |
| | 5785 | 157 | n (20MHz) | 6.5/7.2 (MCS0) | 19.13 | 17.68 | 0.50 | Pass |
| | 5825 | 165 | n (20MHz) | 6.5/7.2 (MCS0) | 19.02 | 17.63 | 0.50 | Pass |

Table 7-3. Conducted Bandwidth Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 21 of 61 |

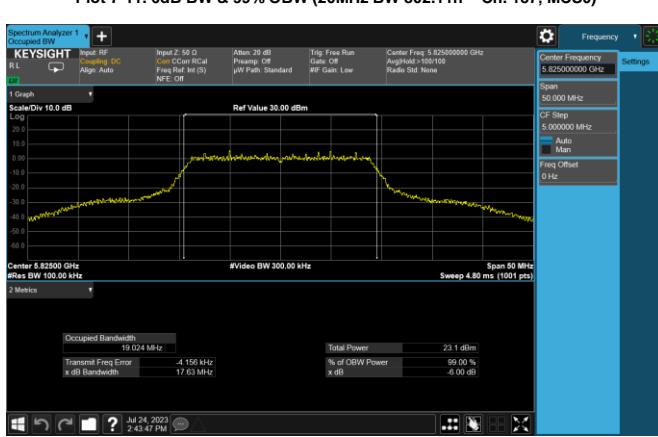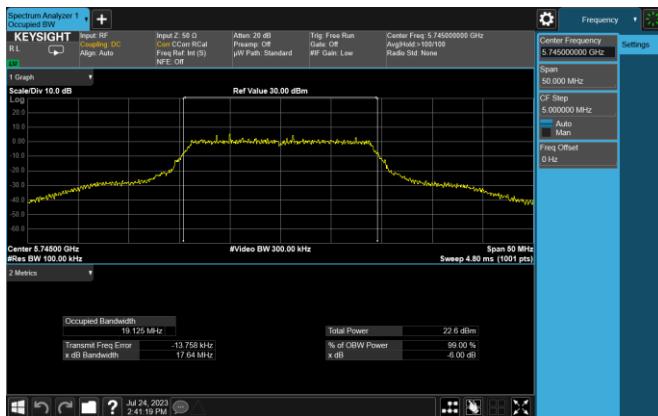

| | | | |
|--|--|---|--|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 22 of 61 |

7.4 Conducted Output Power and Max EIRP Measurement – 802.11a/n

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 99% OBW per ISED RSS-247 and 26dB BW is per FCC 15.407.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(24.27) = 24.85\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(24.38) = 24.87\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

| | | | |
|---|---|---------------------------------------|------------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 23 of 61 V 10.5 12/15/2021 |

7.4.1 Conducted Output Power Measurements

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] |
|------------|---------|----------|-----------------------|----------------|----------------|-----------------------------|-----------------------------|
| | | | 802.11a | 802.11n (MCS0) | 802.11n (MCS7) | | |
| 5180 | 36 | AVG | 16.78 | 16.89 | 14.88 | 23.98 | -7.09 |
| 5200 | 40 | AVG | 16.72 | 16.77 | 14.91 | 23.98 | -7.21 |
| 5240 | 48 | AVG | 16.83 | 16.84 | 14.93 | 23.98 | -7.14 |
| 5260 | 52 | AVG | 16.74 | 16.77 | 14.89 | 23.98 | -7.21 |
| 5300 | 60 | AVG | 16.98 | 16.94 | 14.77 | 23.98 | -7.00 |
| 5320 | 64 | AVG | 16.83 | 16.82 | 14.94 | 23.98 | -7.15 |
| 5500 | 100 | AVG | 16.72 | 16.88 | 14.76 | 23.98 | -7.10 |
| 5580 | 116 | AVG | 16.82 | 16.97 | 14.89 | 23.98 | -7.01 |
| 5660 | 132 | AVG | 16.92 | 16.72 | 14.76 | 23.98 | -7.06 |
| 5680 | 136 | AVG | 14.87 | 14.81 | 14.84 | 23.98 | -9.11 |
| 5700 | 140 | AVG | 12.29 | 12.25 | 12.23 | 23.98 | -11.69 |
| 5720 | 144 | AVG | 16.82 | 16.83 | 14.95 | 23.98 | -7.15 |
| 5745 | 149 | AVG | 16.78 | 16.90 | 14.78 | 30.00 | -13.10 |
| 5785 | 157 | AVG | 16.86 | 16.73 | 14.91 | 30.00 | -13.14 |
| 5825 | 165 | AVG | 16.77 | 16.92 | 14.76 | 30.00 | -13.08 |

Table 7-4. FCC 20MHz BW (UNII) Maximum Conducted Output Power

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|----------------|----------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | | | 802.11a | 802.11n (MCS0) | 802.11n (MCS7) | | | | | | |
| 5180 | 36 | AVG | 15.88 | 15.85 | 14.88 | - | - | -5.70 | 10.18 | 23.01 | -12.83 |
| 5200 | 40 | AVG | 15.78 | 15.91 | 14.91 | - | - | -5.70 | 10.21 | 23.01 | -12.80 |
| 5240 | 48 | AVG | 15.91 | 15.77 | 14.93 | - | - | -5.70 | 10.21 | 23.01 | -12.80 |
| 5260 | 52 | AVG | 16.74 | 16.77 | 14.89 | 23.98 | -7.21 | -5.00 | 11.77 | 30.00 | -18.23 |
| 5300 | 60 | AVG | 16.98 | 16.94 | 14.77 | 23.98 | -7.00 | -5.00 | 11.98 | 30.00 | -18.02 |
| 5320 | 64 | AVG | 16.83 | 16.82 | 14.94 | 23.98 | -7.15 | -5.00 | 11.83 | 30.00 | -18.17 |
| 5500 | 100 | AVG | 16.72 | 16.88 | 14.76 | 23.98 | -7.10 | -3.90 | 12.98 | 30.00 | -17.02 |
| 5580 | 116 | AVG | 16.82 | 16.97 | 14.89 | 23.98 | -7.01 | -3.90 | 13.07 | 30.00 | -16.93 |
| 5660 | 132 | AVG | 16.92 | 16.72 | 14.76 | 23.98 | -7.06 | -3.90 | 13.02 | 30.00 | -16.98 |
| 5680 | 136 | AVG | 14.87 | 14.81 | 14.84 | 23.98 | -9.11 | -3.90 | 10.97 | 30.00 | -19.03 |
| 5700 | 140 | AVG | 12.29 | 12.25 | 12.23 | 23.98 | -11.69 | -3.90 | 8.39 | 30.00 | -21.61 |
| 5720 | 144 | AVG | 16.82 | 16.83 | 14.95 | 23.98 | -7.15 | -3.90 | 12.93 | 30.00 | -17.07 |
| 5745 | 149 | AVG | 16.78 | 16.90 | 14.78 | 30.00 | -13.10 | -3.80 | 13.10 | - | - |
| 5785 | 157 | AVG | 16.86 | 16.73 | 14.91 | 30.00 | -13.14 | -3.80 | 13.06 | - | - |
| 5825 | 165 | AVG | 16.77 | 16.92 | 14.76 | 30.00 | -13.08 | -3.80 | 13.12 | - | - |

Table 7-5. ISED 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted power was calculated to be 15.88 dBm with antenna gain of -5.7 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$16.89 \text{ dBm} + -5.7 \text{ dBi} = 10.18 \text{ dBm}$$

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 24 of 61 |

7.5 Maximum Power Spectral Density – 802.11a/n

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.15 – 5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1 MHz band.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. All modes have been investigated and only the worst case data rate is reported.

| | | | |
|---|---|---------------------------------------|------------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 25 of 61 V 10.5 12/15/2021 |

7.5.1 Power Spectral Density Measurements





| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|-------------|-------------|------------------|----------------------------------|-----------------------------|-------------|
| Band 1 | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | 6.41 | 11.0 | -4.59 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | 6.43 | 11.0 | -4.57 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | 5.39 | 11.0 | -5.61 |
| | 5260 | 52 | n (20MHz) | 6.5/7.2 (MCS0) | 4.93 | 11.0 | -6.07 |
| | 5280 | 56 | n (20MHz) | 6.5/7.2 (MCS0) | 4.58 | 11.0 | -6.42 |
| | 5320 | 64 | n (20MHz) | 6.5/7.2 (MCS0) | 4.70 | 11.0 | -6.30 |
| | 5500 | 100 | n (20MHz) | 6.5/7.2 (MCS0) | 5.01 | 11.0 | -5.99 |
| | 5580 | 116 | n (20MHz) | 6.5/7.2 (MCS0) | 5.86 | 11.0 | -5.15 |
| | 5720 | 144 | n (20MHz) | 6.5/7.2 (MCS0) | 4.25 | 11.0 | -6.75 |

Table 7-6. Bands 1, 2A, 2C Power Spectral Density Measurements







| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm/MHz] | Antenna Gain [dBi] | e.i.r.p. Power Density [dBm/MHz] | ISED Max e.i.r.p. Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|-------------|-------------|------------------|----------------------------------|--------------------|----------------------------------|---|-------------|
| Band 1 | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | 5.54 | -5.70 | -0.16 | 10.0 | -10.16 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | 5.45 | -5.70 | -0.25 | 10.0 | -10.25 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | 5.00 | -5.70 | -0.70 | 10.0 | -10.70 |

Table 7-7. ISED Band 1 e.i.r.p. Power Spectral Density Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 26 of 61 |

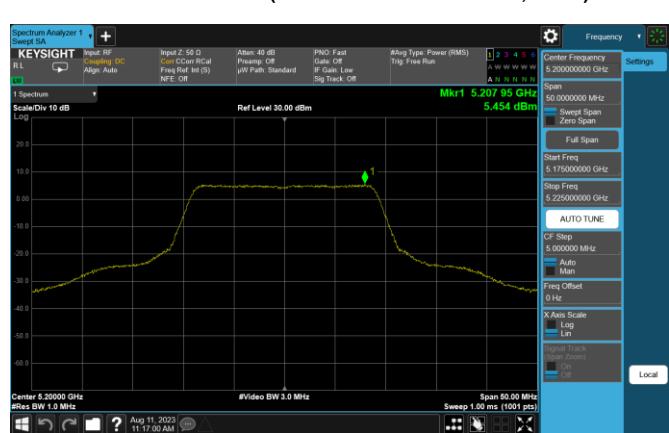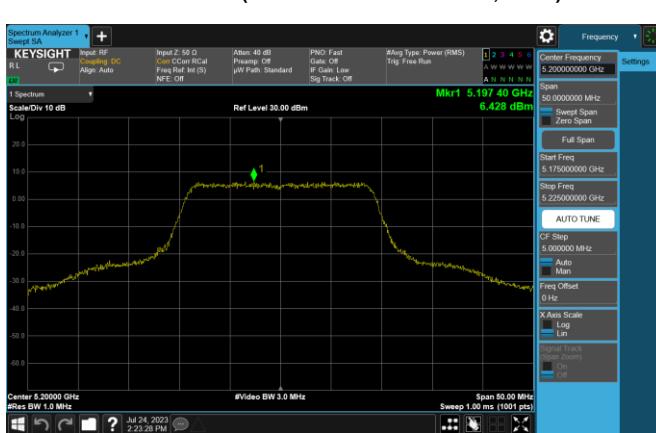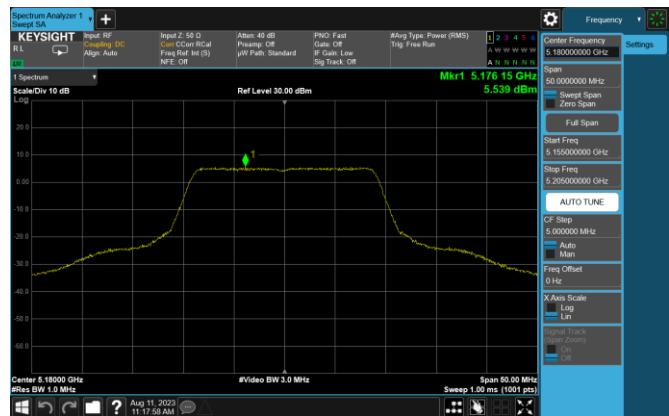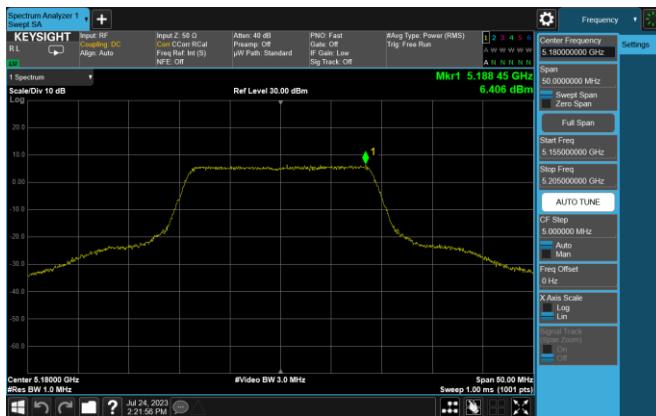

| | | | |
|--|--|---|--|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 27 of 61 |

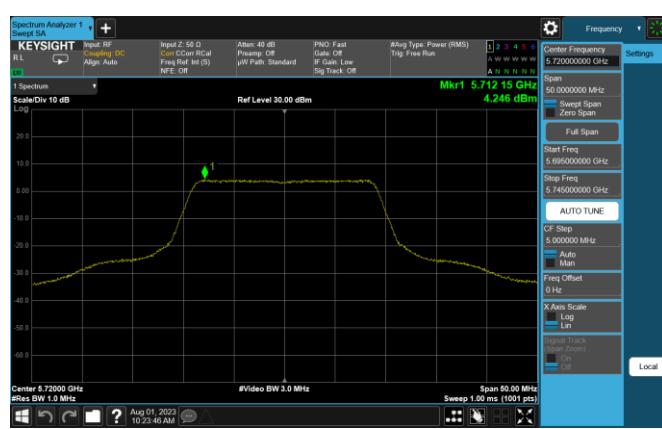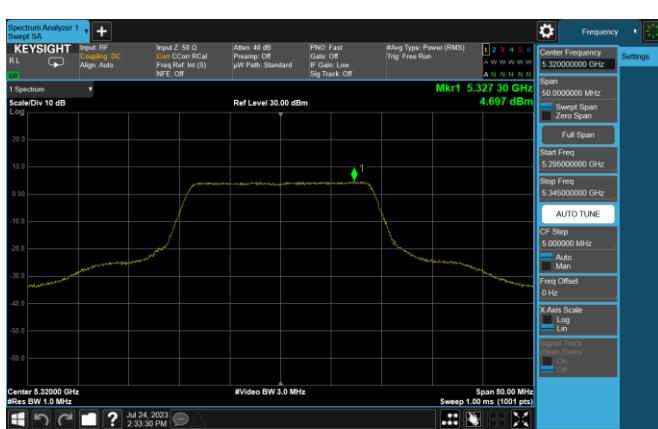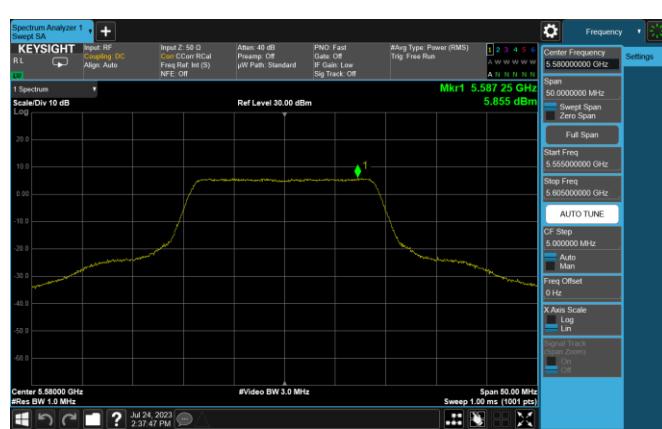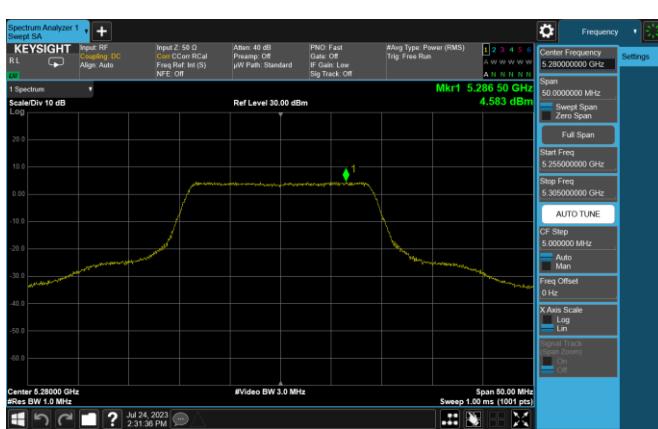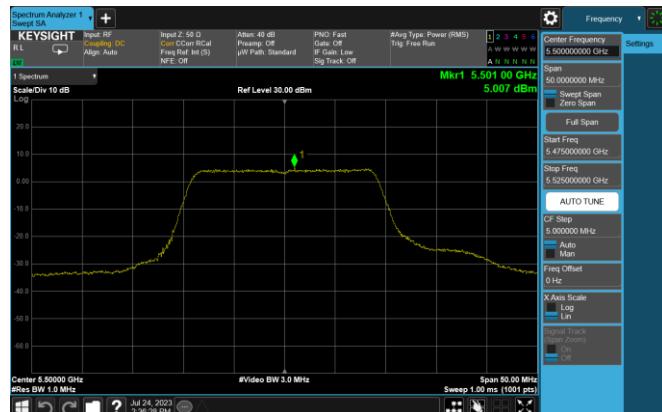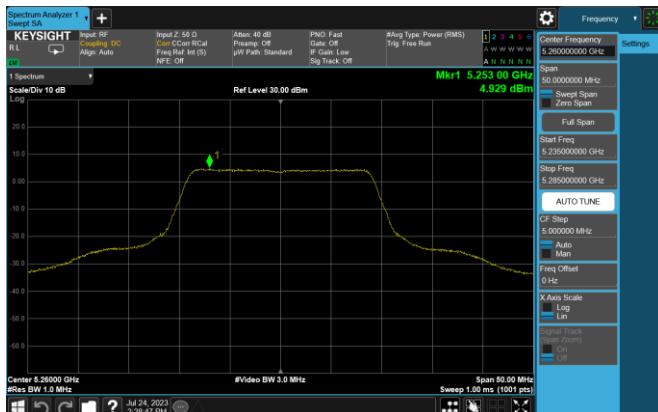


| | | | |
|--|--|---|--|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 28 of 61 |


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm/500kHz] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] |
|--------|-----------------|-------------|-------------|------------------|-------------------------------------|--|-------------|
| Band 3 | 5745 | 149 | n (20MHz) | 6.5/7.2 (MCS0) | 1.90 | 30.0 | -28.10 |
| | 5785 | 157 | n (20MHz) | 6.5/7.2 (MCS0) | 2.92 | 30.0 | -27.08 |
| | 5825 | 165 | n (20MHz) | 6.5/7.2 (MCS0) | 3.09 | 30.0 | -26.91 |

Table 7-8. Band 3 Power Spectral Density Measurements


| | | | |
|---|--|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 29 of 61 |

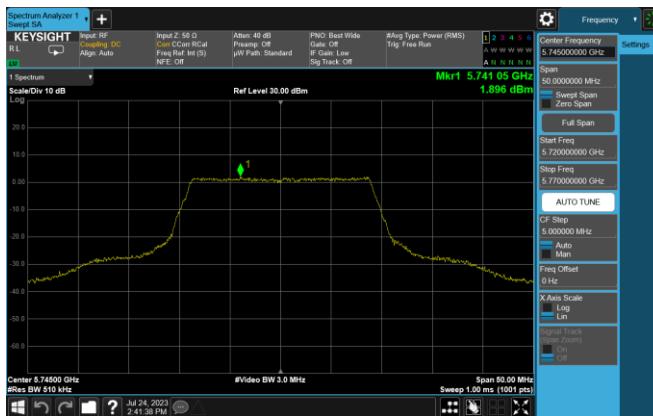

Plot 7-25. PSD (20MHz BW 802.11n – Ch. 149, MCS0)

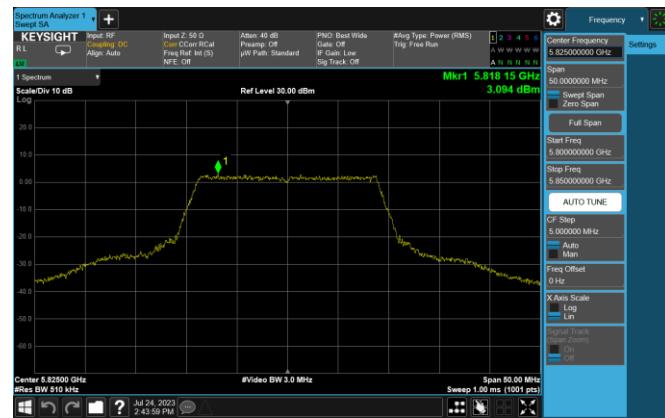

Plot 7-27. PSD (20MHz BW 802.11n – Ch. 165, MCS0)

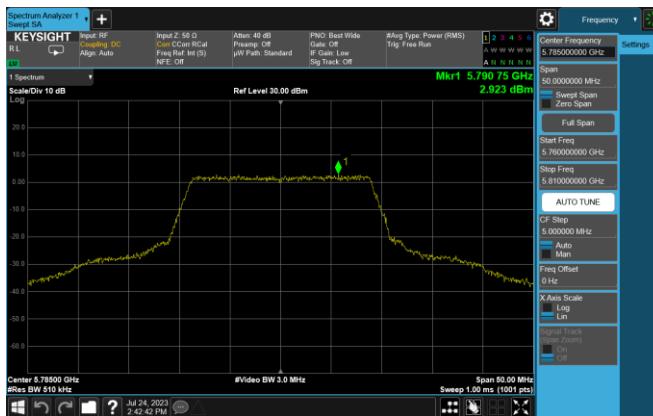

Plot 7-26. PSD (20MHz BW 802.11n – Ch. 157, MCS0)

Note:

Sample e.i.r.p Power Spectral Density Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average power density was calculated to be 6.41 dBm with antenna gain of -5.70 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$5.54 \text{ dBm} + -5.70 \text{ dBi} = -0.16 \text{ dBm}$$

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 30 of 61 |

7.6 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-9 per Section 15.209 and RSS-Gen (8.9).

| Frequency | Field Strength [μ V/m] | Measured Distance [Meters] |
|-----------------|--------------------------------|-------------------------------|
| Above 960.0 MHz | 500 | 3 |

Table 7-9. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

| | | | |
|---|---|---------------------------------------|------------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 31 of 61 V 10.5 12/15/2021 |

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

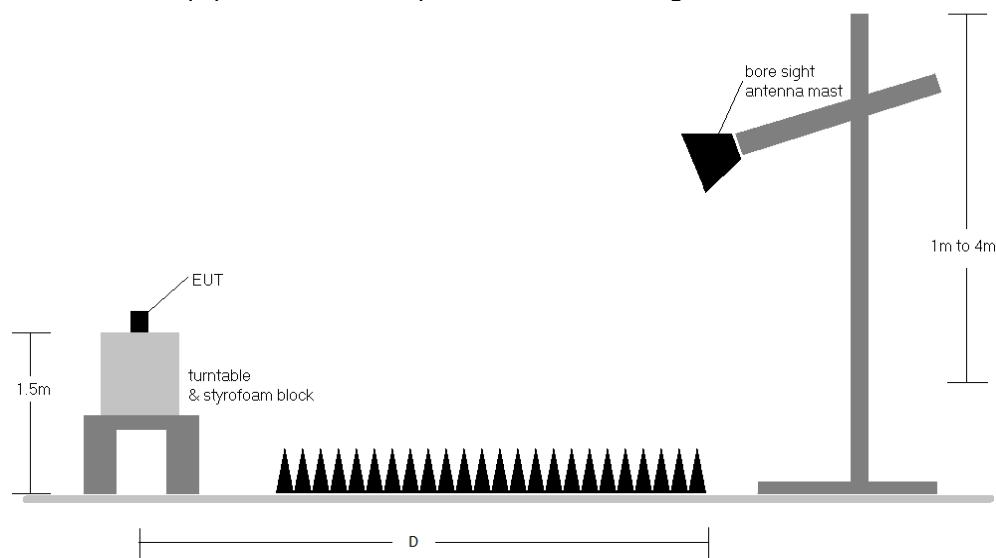


Figure 7-5. Test Instrument & Measurement Setup

| | | | |
|---|--|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 32 of 61 |

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-9. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates were investigated and only the worse case is reported
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
11. Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.2 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

| | | | |
|---|--|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 33 of 61 |

7.6.1 Radiated Spurious Emission

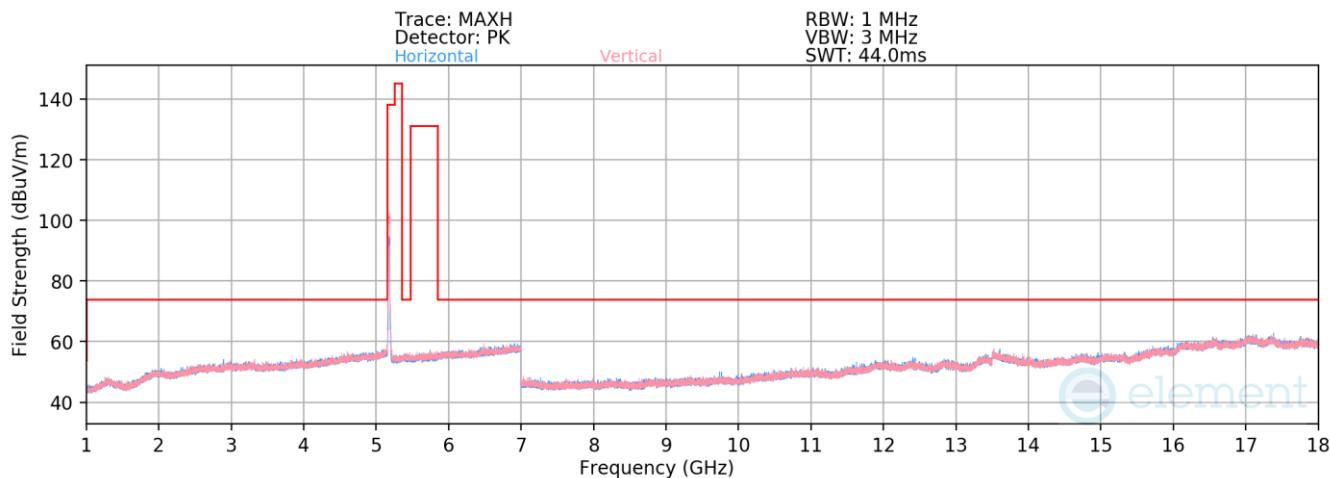


Plot 7-28. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 36)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 10360.00 | Peak | V | - | - | -74.34 | 16.32 | 48.98 | 68.20 | -19.22 |
| * 15540.00 | Average | V | - | - | -87.58 | 24.86 | 44.28 | 53.98 | -9.70 |
| * 15540.00 | Peak | V | - | - | -76.14 | 24.86 | 55.72 | 73.98 | -18.26 |

Table 7-10. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 34 of 61 |

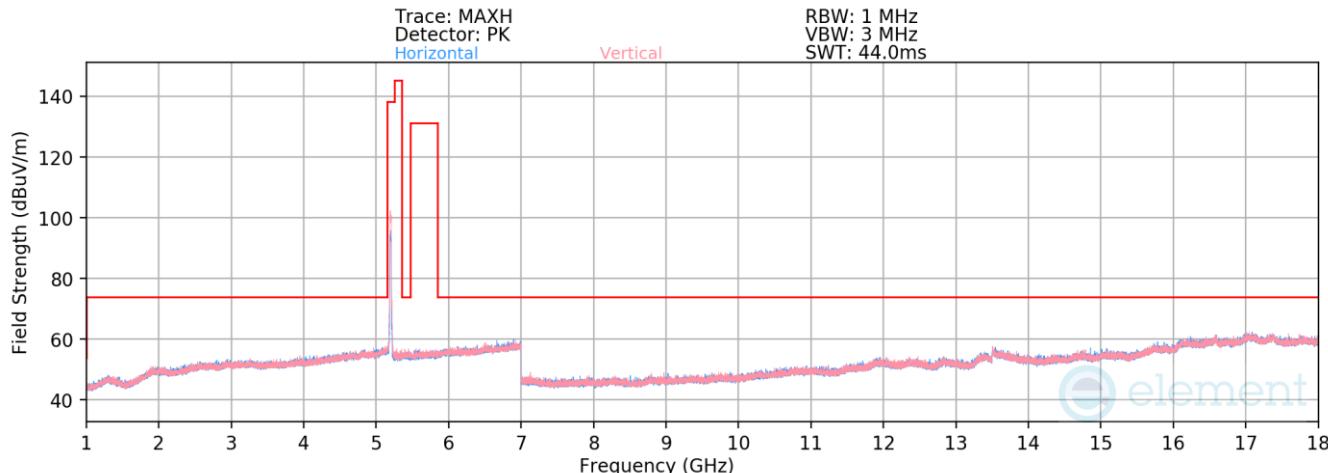


Plot 7-29. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 40)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 10400.00 | Peak | V | - | - | -74.41 | 16.30 | 48.89 | 68.20 | -19.31 |
| * 15600.00 | Average | V | - | - | -86.99 | 24.68 | 44.69 | 53.98 | -9.29 |
| * 15600.00 | Peak | V | - | - | -75.76 | 24.68 | 55.92 | 73.98 | -18.06 |

Table 7-11. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 35 of 61 |

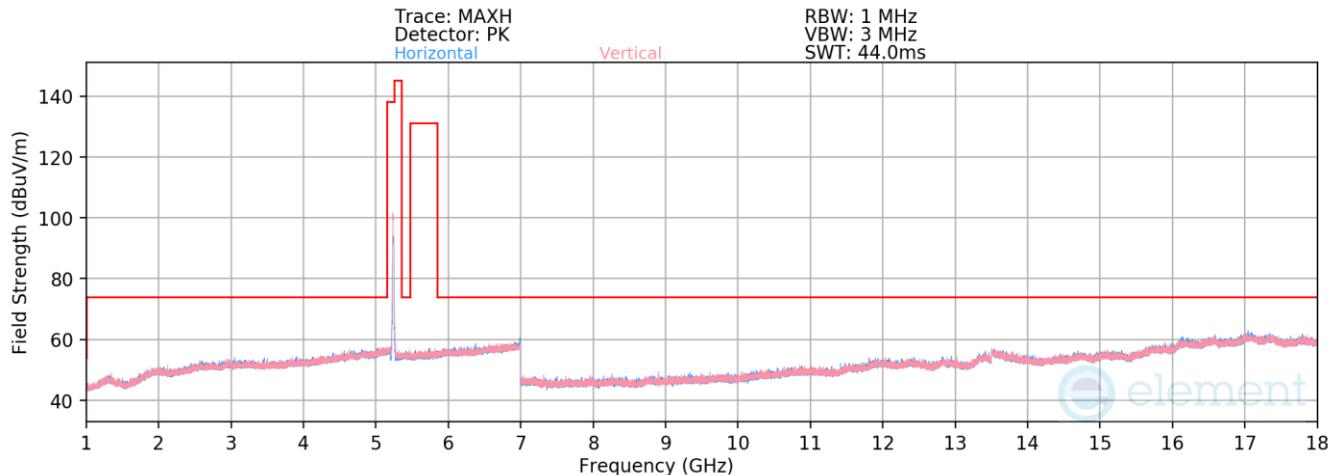


Plot 7-30. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 48)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 10480.00 | Peak | V | - | - | -74.19 | 16.64 | 49.45 | 68.20 | -18.75 |
| * 15720.00 | Average | V | - | - | -87.54 | 26.11 | 45.57 | 53.98 | -8.41 |
| * 15720.00 | Peak | V | - | - | -75.92 | 26.11 | 57.19 | 73.98 | -16.79 |

Table 7-12. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 36 of 61 |

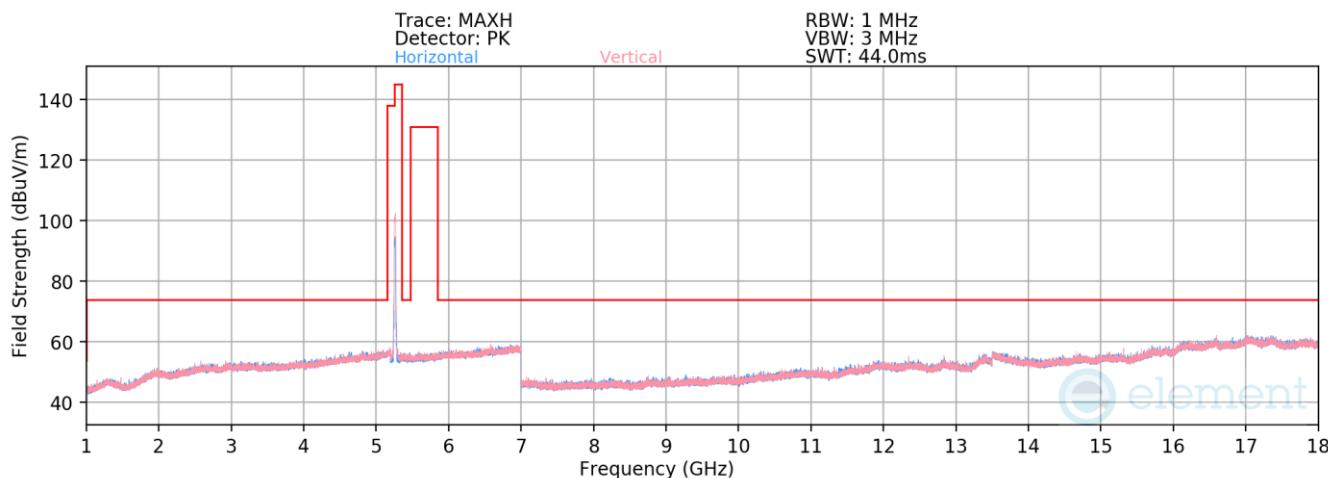


Plot 7-31. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 52)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 10520.00 | Peak | V | - | - | -73.77 | 16.62 | 49.85 | 68.20 | -18.35 |
| * 15780.00 | Average | V | - | - | -87.76 | 26.16 | 45.40 | 53.98 | -8.58 |
| * 15780.00 | Peak | V | - | - | -76.32 | 26.16 | 56.84 | 73.98 | -17.14 |

Table 7-13. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 37 of 61 |

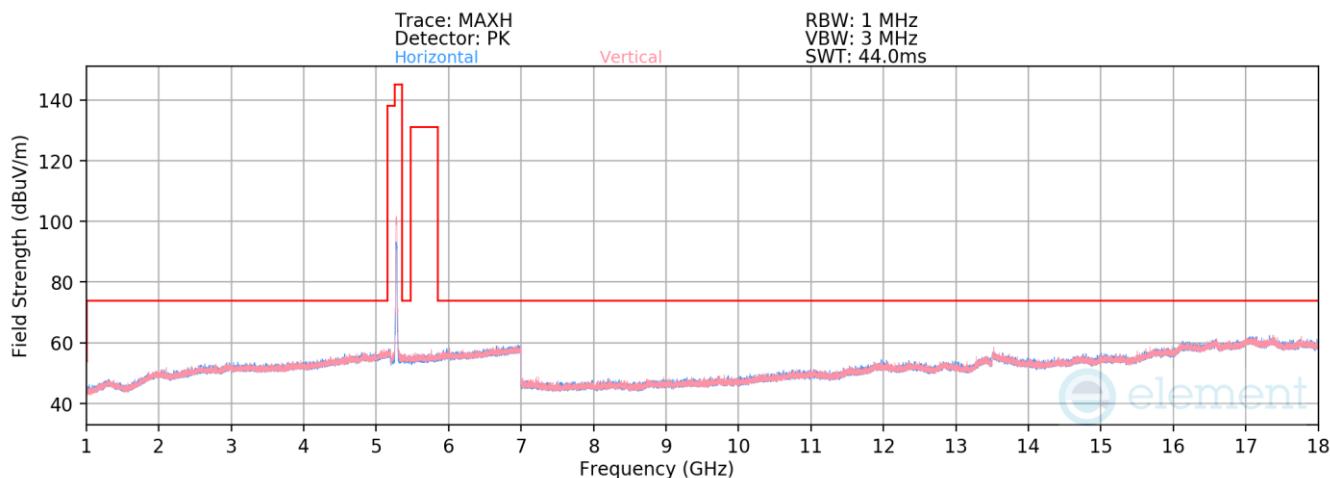


Plot 7-32. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 56)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 10560.00 | Peak | V | - | - | -74.94 | 16.78 | 48.84 | 68.20 | -19.36 |
| * 15840.00 | Average | V | - | - | -88.06 | 26.02 | 44.96 | 53.98 | -9.02 |
| * 15840.00 | Peak | V | - | - | -76.64 | 26.02 | 56.38 | 73.98 | -17.60 |

Table 7-14. Radiated Measurements

| | | | |
|---|--|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 38 of 61 |

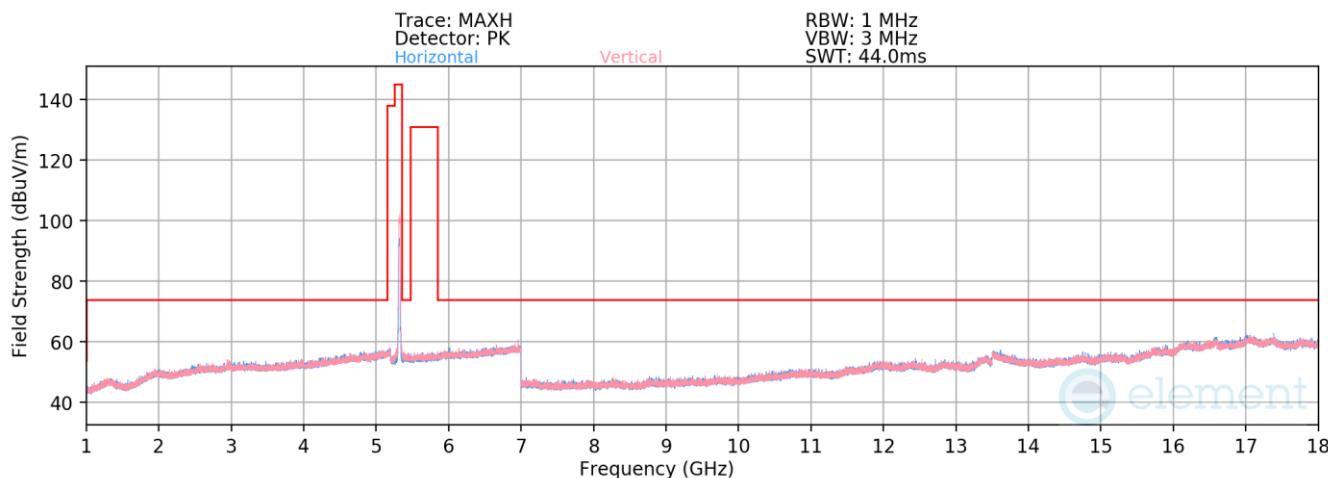


Plot 7-33. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 64)

| | |
|---------------------------|----------|
| Mode: | 802.11n |
| Data Rate: | MCS0 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5320MHz |
| Channel: | 64 |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| * 10640.00 | Average | V | - | - | -85.59 | 16.80 | 38.21 | 53.98 | -15.77 |
| * 10640.00 | Peak | V | - | - | -74.45 | 16.80 | 49.35 | 73.98 | -24.63 |
| * 15960.00 | Average | V | - | - | -87.46 | 25.81 | 45.35 | 53.98 | -8.63 |
| * 15960.00 | Peak | V | - | - | -75.96 | 25.81 | 56.85 | 73.98 | -17.13 |

Table 7-15. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 39 of 61 |

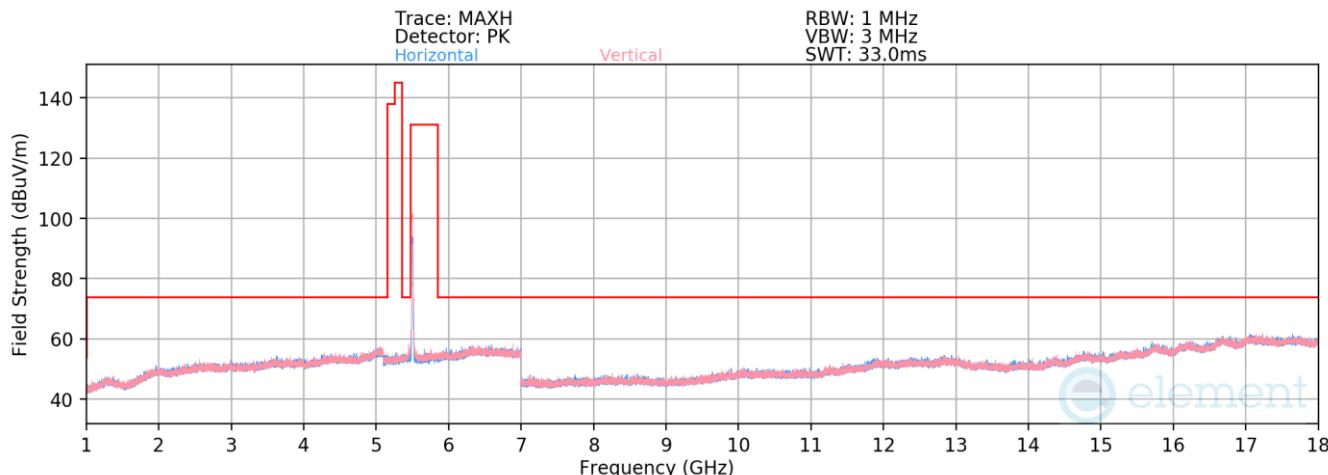


Plot 7-34. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 100)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11000.00 | Average | V | - | - | -86.87 | 17.41 | 37.54 | 53.98 | -16.44 |
| * 11000.00 | Peak | V | - | - | -75.82 | 17.41 | 48.59 | 73.98 | -25.39 |
| 16500.00 | Peak | V | - | - | -77.31 | 27.62 | 57.31 | 68.20 | -10.89 |

Table 7-16. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 40 of 61 |

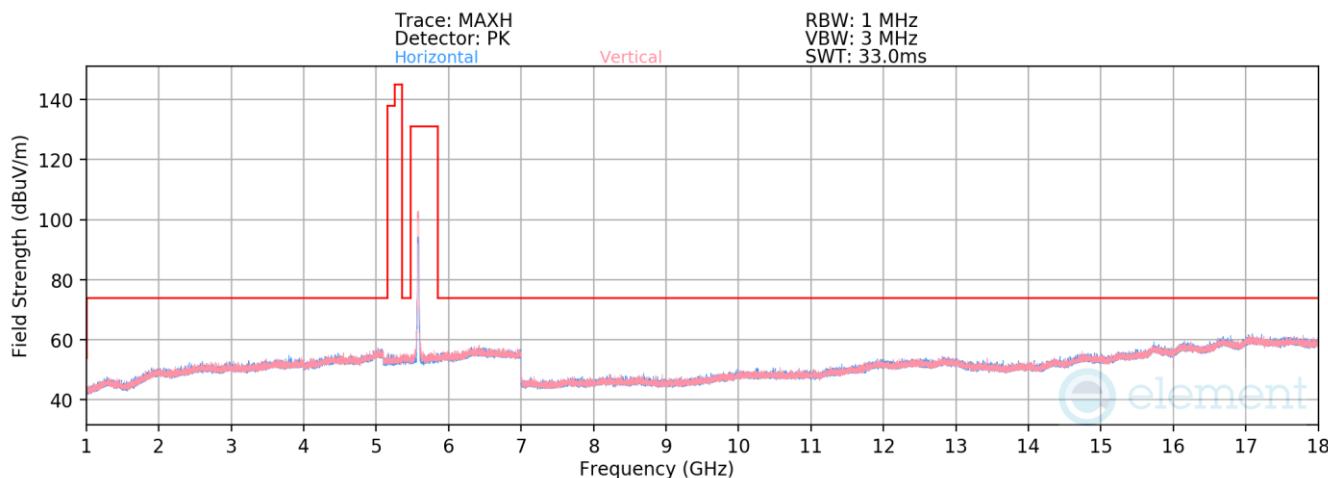


Plot 7-35. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 116)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580Hz
 Channel: 116

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|--------|
| 6983.30 | Peak | V | 312 | 124 | -68.11 | 18.70 | 57.59 | 68.20 | -10.61 | |
| * | 11160.00 | Average | V | - | - | -86.48 | 17.75 | 38.27 | 53.98 | -15.71 |
| * | 11160.00 | Peak | V | - | - | -75.33 | 17.75 | 49.42 | 73.98 | -24.56 |
| 16740.00 | Peak | V | - | - | -75.62 | 28.51 | 59.89 | 68.20 | -8.31 | |

Table 7-17. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 41 of 61 |

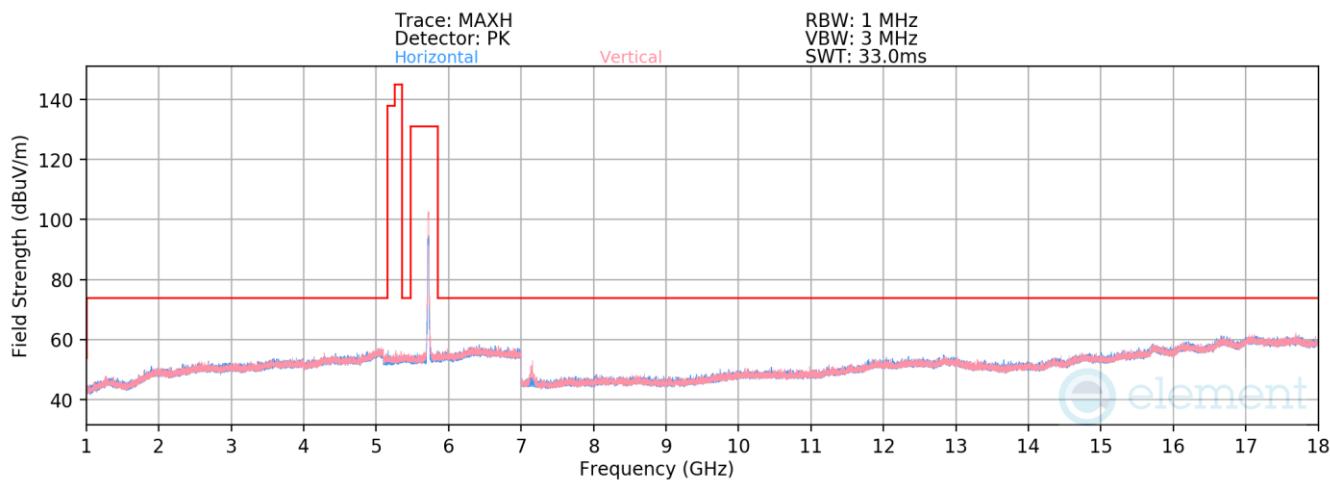

Plot 7-36. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 144)



Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5720
 Channel: 144

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 7158.00 | Peak | V | 394 | 94 | -63.04 | 13.41 | 57.37 | 68.20 | -10.83 |
| * 11440.00 | Average | V | - | - | -86.70 | 18.14 | 38.44 | 53.98 | -15.54 |
| * 11440.00 | Peak | V | - | - | -75.42 | 18.14 | 49.72 | 73.98 | -24.26 |
| 17160.00 | Peak | V | - | - | -75.77 | 28.28 | 59.51 | 68.20 | -8.69 |


Table 7-18. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 42 of 61 |

Radiated Spurious Emissions (Above 18GHz)

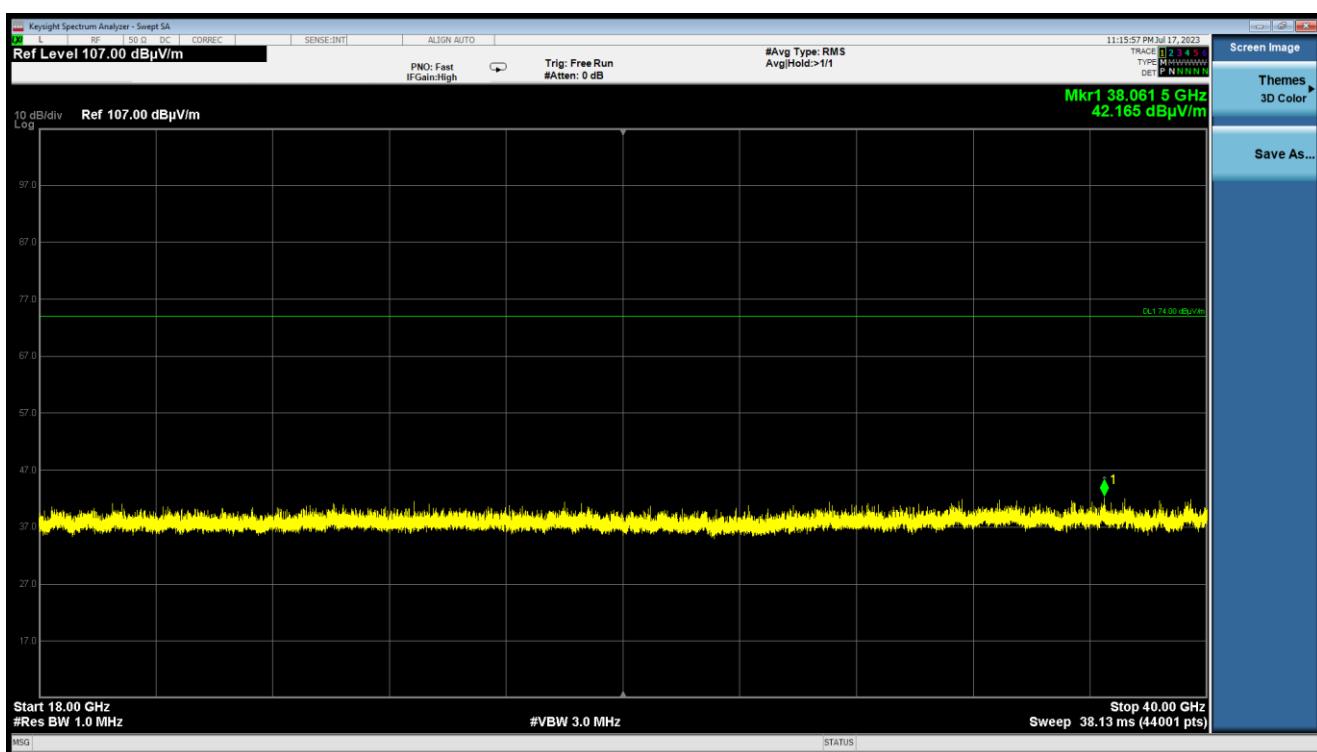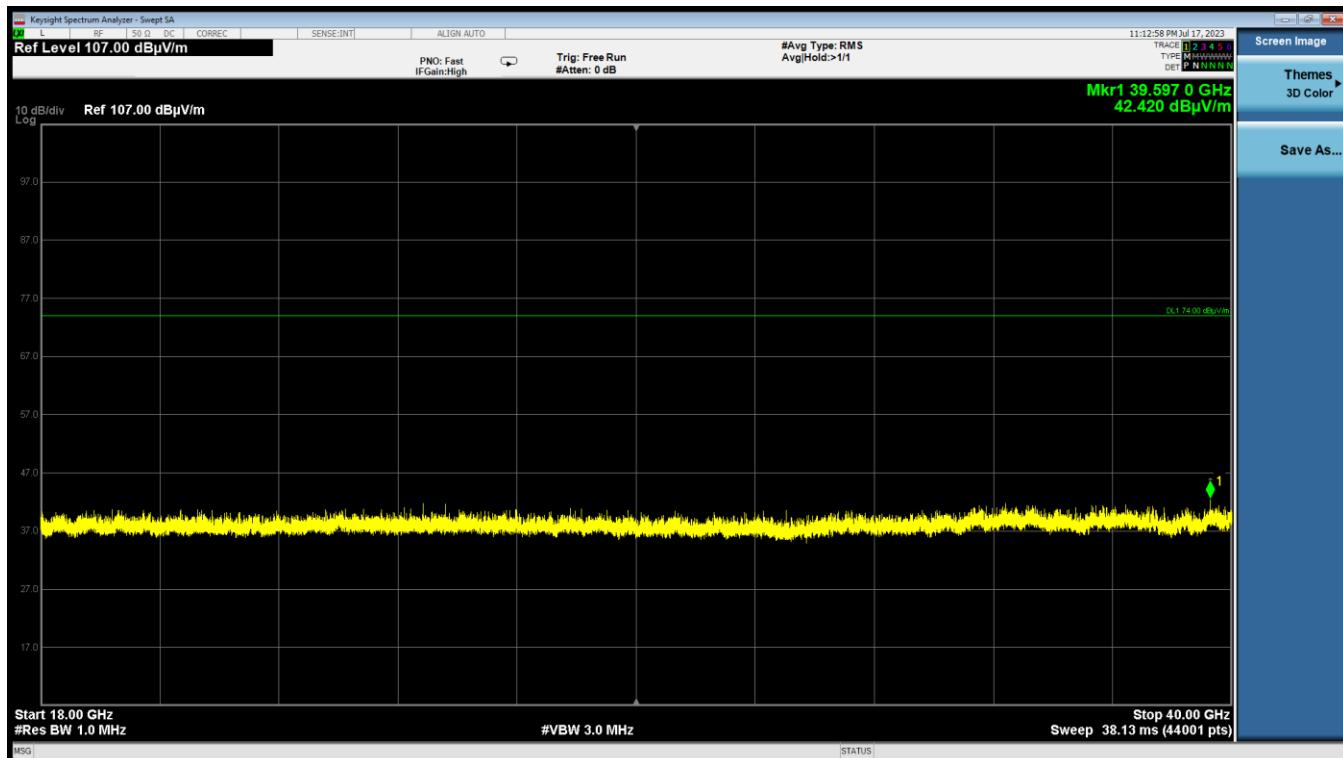

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 43 of 61 |

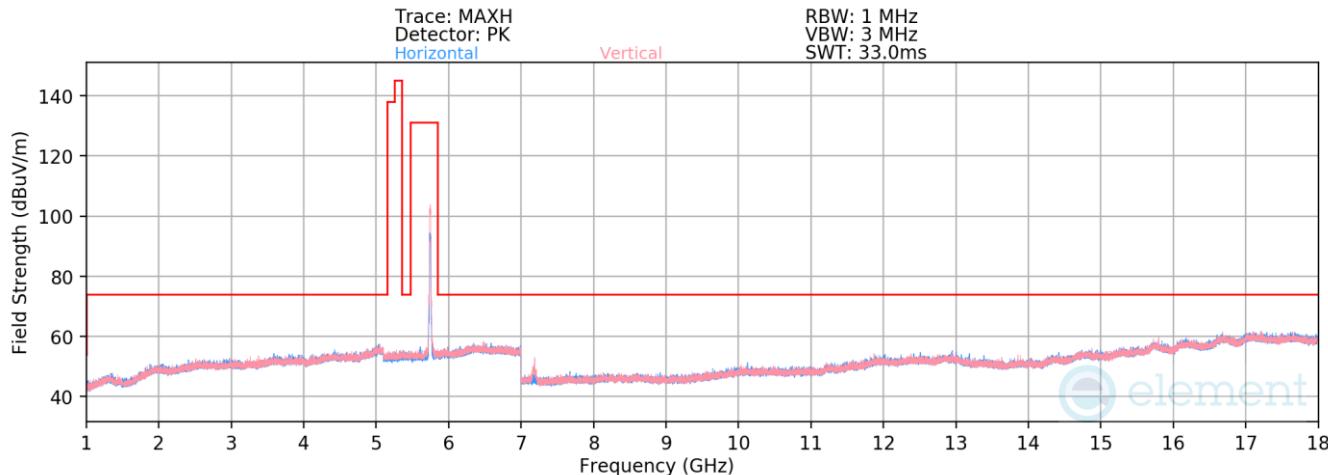


Plot 7-39. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 149)

| | |
|---------------------------|----------|
| Mode: | 802.11n |
| Data Rate: | MCS0 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5745MHz |
| Channel: | 149 |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 7190.00 | Peak | V | 102 | 216 | -63.95 | 13.51 | 56.56 | 68.20 | -11.64 |
| * 11490.00 | Average | V | - | - | -86.56 | 18.33 | 38.77 | 53.98 | -15.21 |
| * 11490.00 | Peak | V | - | - | -75.72 | 18.33 | 49.61 | 73.98 | -24.37 |
| 17235.00 | Peak | V | - | - | -76.51 | 28.55 | 59.04 | 68.20 | -9.16 |

Table 7-19. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 44 of 61 |

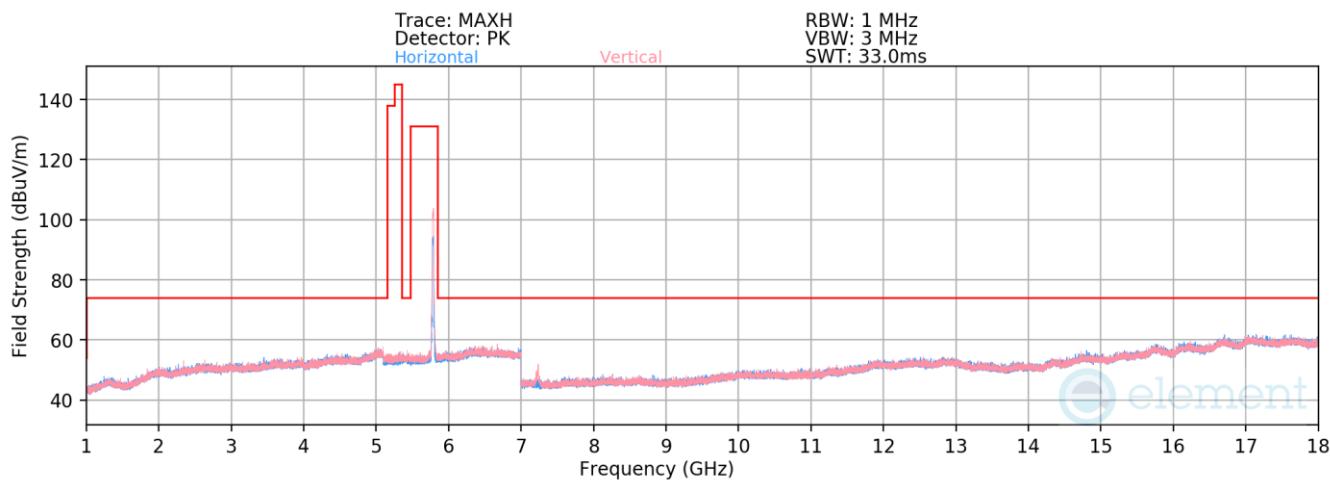


Plot 7-40. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 157)

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 7239.00 | Peak | V | 106 | 216 | -65.45 | 13.40 | 54.95 | 68.20 | -13.25 |
| * 11570.00 | Average | V | - | - | -86.59 | 18.62 | 39.03 | 53.98 | -14.95 |
| * 11570.00 | Peak | V | - | - | -75.78 | 18.62 | 49.84 | 73.98 | -24.14 |
| 17355.00 | Peak | V | - | - | -77.13 | 29.03 | 58.90 | 68.20 | -9.30 |

Table 7-20. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 45 of 61 |

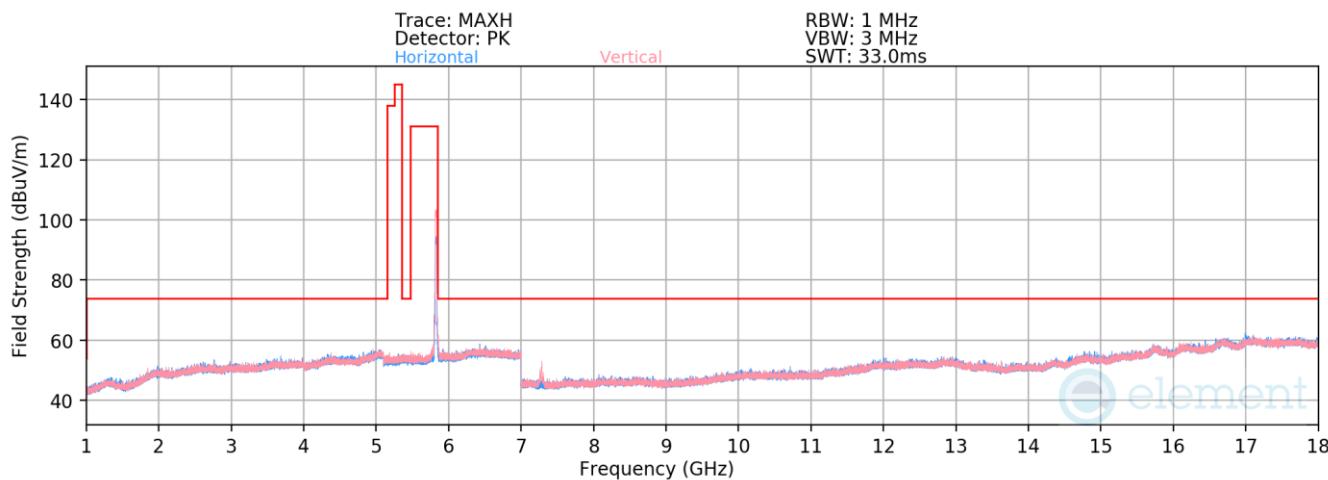

Plot 7-41. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 165)


| | |
|---------------------------|----------|
| Mode: | 802.11n |
| Data Rate: | MCS0 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5825MHz |
| Channel: | 165 |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 7289.00 | Average | V | 110 | 214 | -75.05 | 13.04 | 44.99 | 53.98 | -8.99 |
| * 7289.00 | Peak | V | 110 | 214 | -64.87 | 13.04 | 55.17 | 73.98 | -18.81 |
| * 11650.00 | Average | V | - | - | -86.77 | 18.72 | 38.95 | 53.98 | -15.03 |
| * 11650.00 | Peak | V | - | - | -75.91 | 18.72 | 49.81 | 73.98 | -24.17 |
| 17475.00 | Peak | V | - | - | -77.12 | 28.43 | 58.31 | 68.20 | -9.89 |

Table 7-21. Radiated Measurements

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 46 of 61 |


| Description | Bluetooth | UNII |
|---------------------------|-----------|---------|
| Antenna | FCM | FCM |
| Channel | 78 | 36 |
| Operating Frequency (MHz) | 2480 | 5180 |
| Mode/Modulation | GFSK ePA | 802.11n |

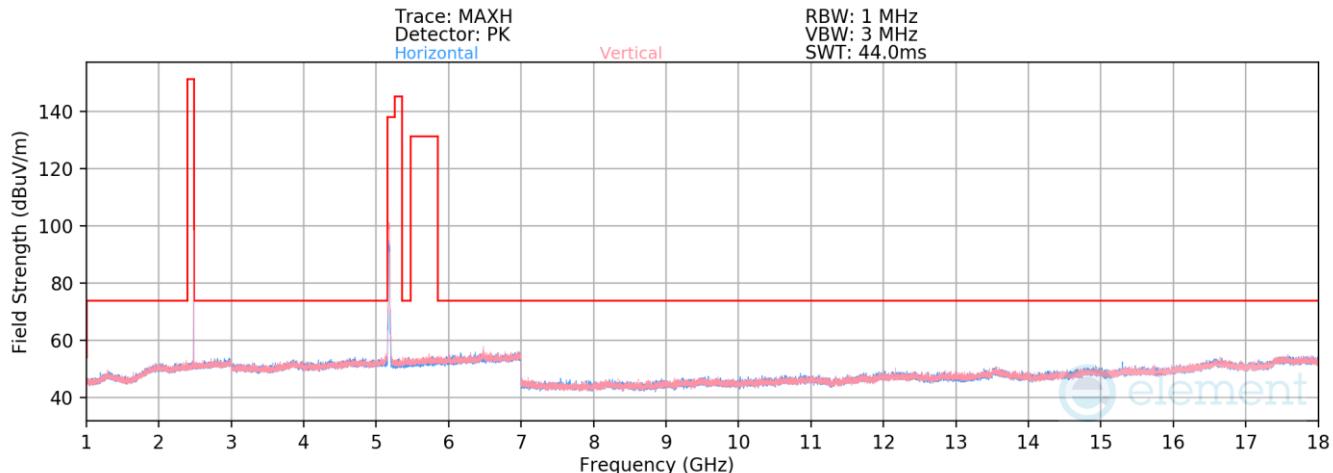Table 7-22. Worst Case Simultaneous Transmission Configuration

Plot 7-42. Radiated Spurious Emissions Simultaneous Transmission 1GHz – 18GHz


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|--------|
| * | 4960.00 | Peak | V | - | - | -66.78 | 13.93 | 54.15 | 73.98 | -19.83 |
| * | 7440.00 | Peak | V | 174 | 194 | -67.33 | 9.08 | 48.75 | 73.98 | -25.23 |
| * | 12400.00 | Peak | V | - | - | -70.85 | 12.33 | 48.48 | 73.98 | -25.50 |
| * | 10360.00 | Peak | V | - | - | -69.35 | 10.20 | 47.85 | 68.20 | -20.35 |
| * | 15540.00 | Avg | V | - | - | -84.87 | 16.09 | 38.22 | 53.98 | -15.76 |
| * | 15540.00 | Peak | V | - | - | -72.13 | 16.09 | 50.96 | 73.98 | -23.02 |

Table 7-23. Bluetooth and UNII Harmonic Measurements in Simultaneous Transmission Mode
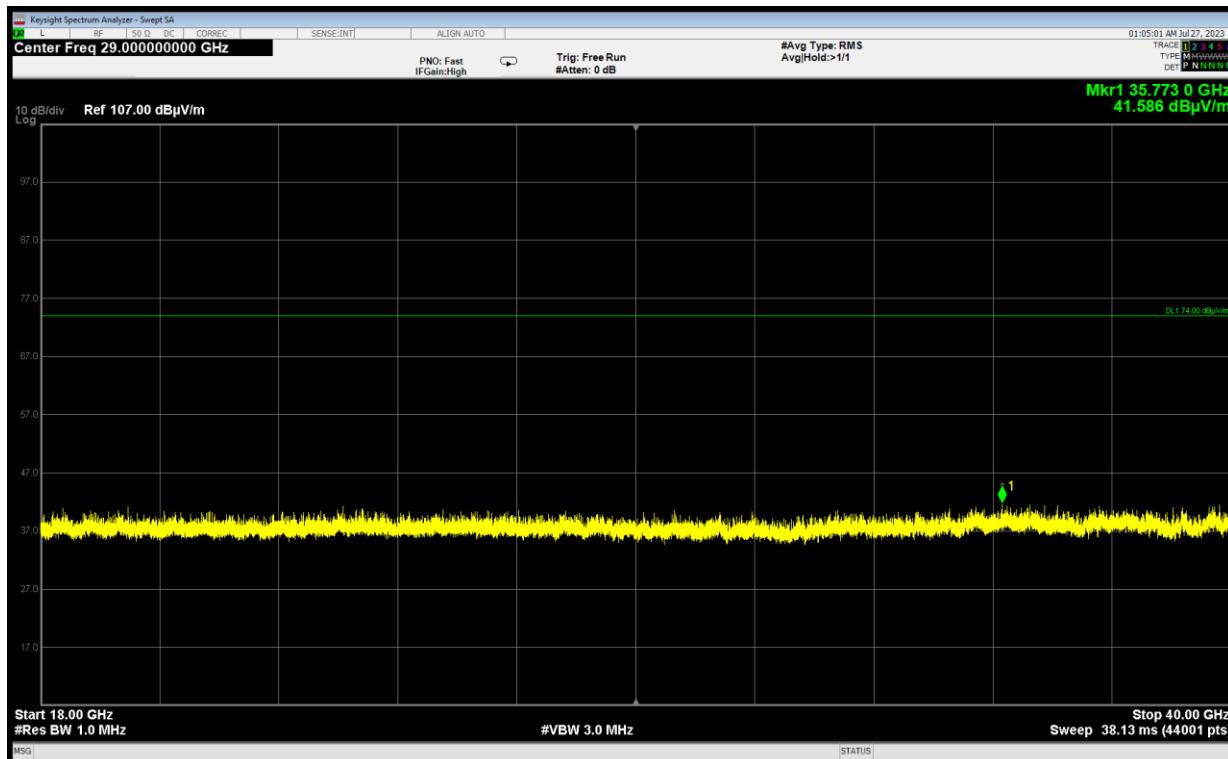
| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 47 of 61 |



Plot 7-43. Radiated Spurious Emissions Simultaneous Transmission 18GHz – 40GHz Pol H

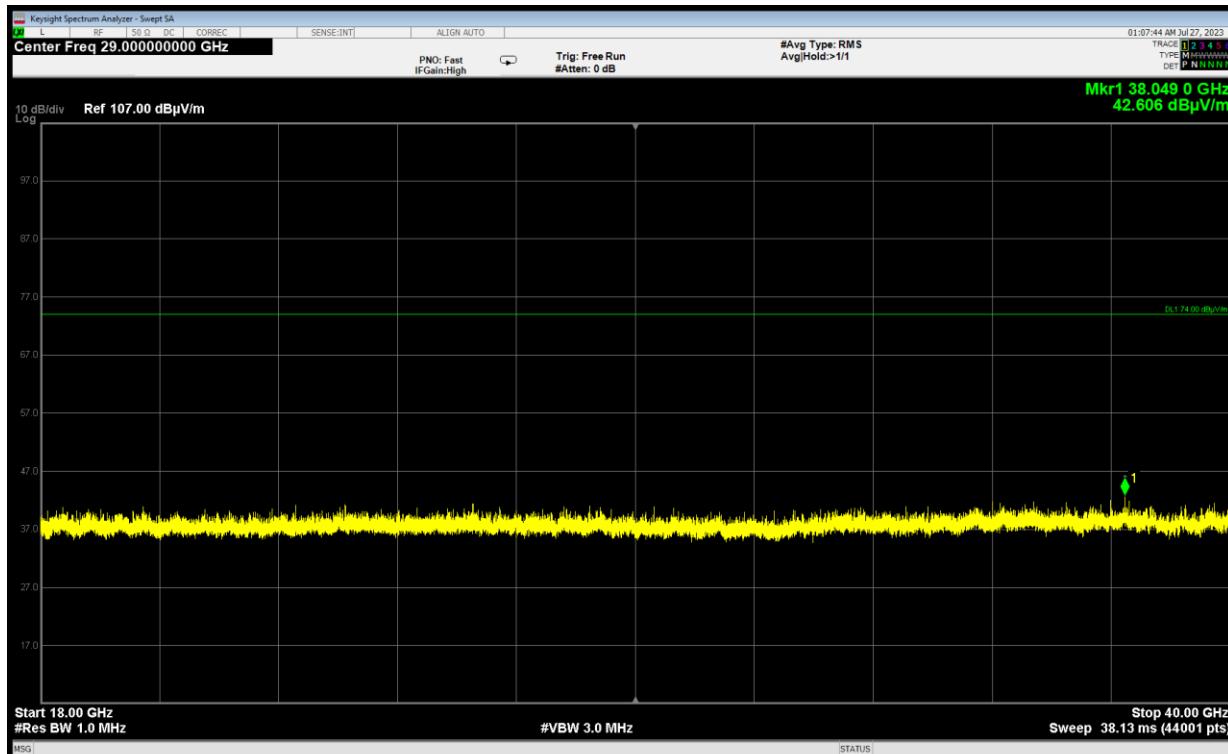


Plot 7-44. Radiated Spurious Emissions Simultaneous Transmission 18GHz – 40GHz Pol V


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 48 of 61 |

7.6.2 Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

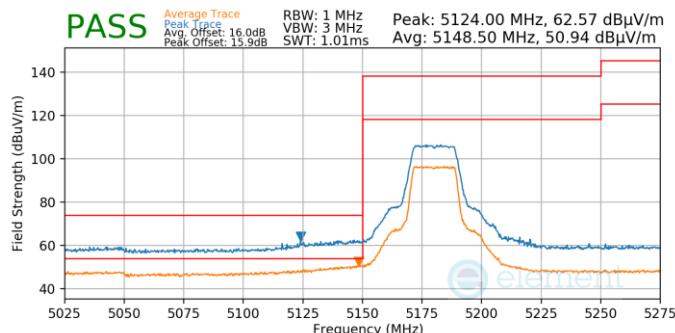


Plot 7-45. (Pk & Avg, Ch.36, 802.11n, MCS0)

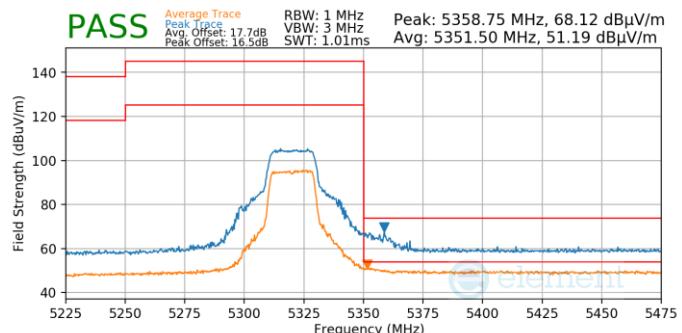


Plot 7-48. (Pk & Avg, Ch.64, 802.11n, MCS7)

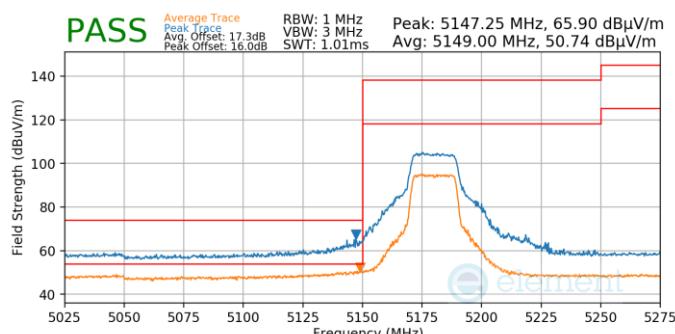


Plot 7-46. (Pk & Avg, Ch.36, 802.11n, MCS7)

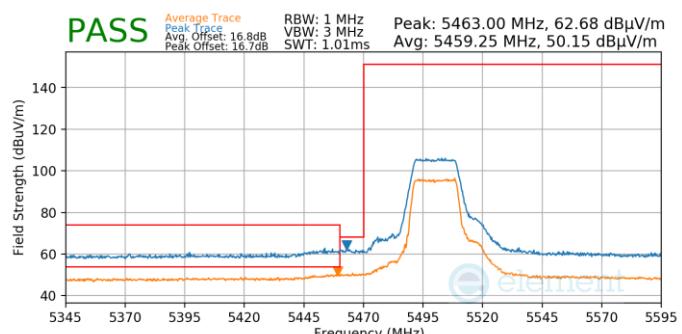

Plot 7-49. (Pk & Avg, Ch.100, 802.11n, MCS0)

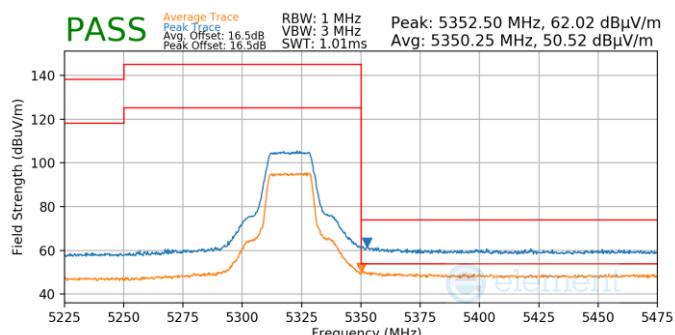

Plot 7-47. (Pk & Avg, Ch.64, 802.11n, MCS0)

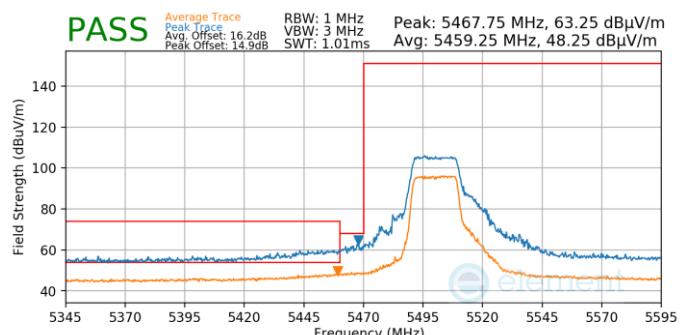


Plot 7-50. (Pk & Avg, Ch.100, 802.11n, MCS7)


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 49 of 61 |

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

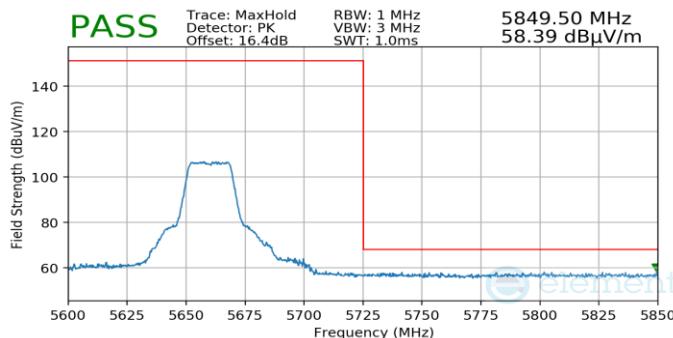


Plot 7-51. (Pk, Ch.132, 802.11n, MCS0)

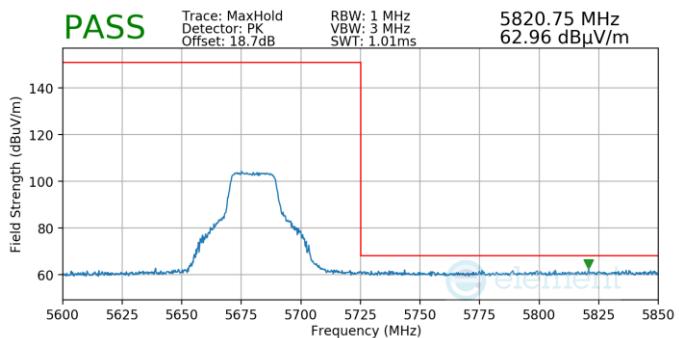


Plot 7-54. (Pk, Ch.136, 802.11n, MCS7)

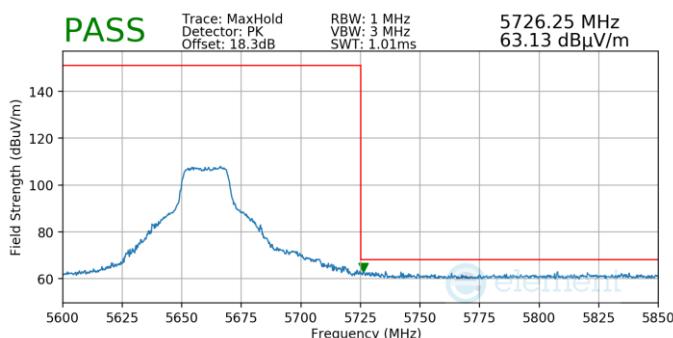


Plot 7-52. (Pk, Ch.132, 802.11n, MCS7)

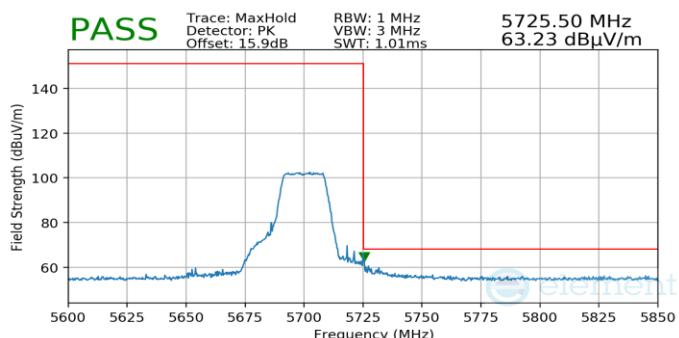

Plot 7-55. (Pk, Ch.140, 802.11n, MCS0)

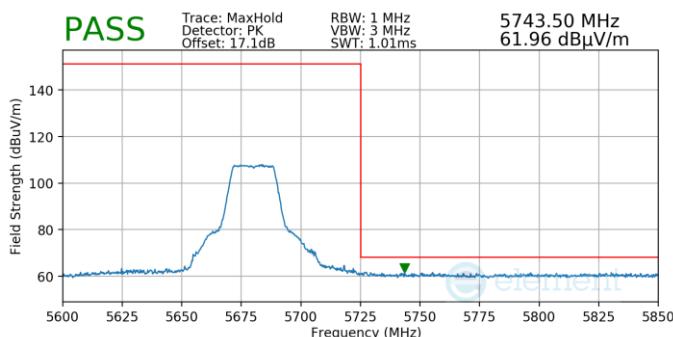


Plot 7-53. (Pk, Ch.136, 802.11n, MCS0)

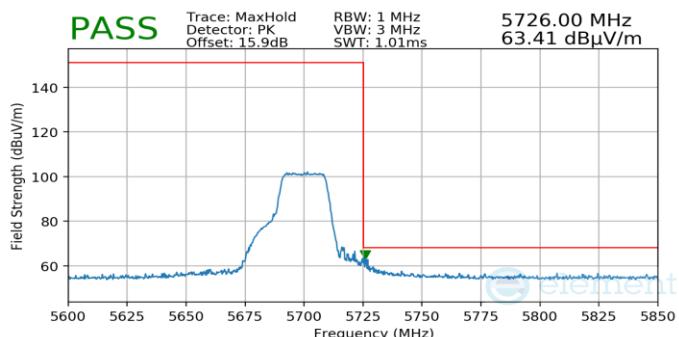


Plot 7-56. (Pk, Ch.140, 802.11n, MCS7)


| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 50 of 61 |

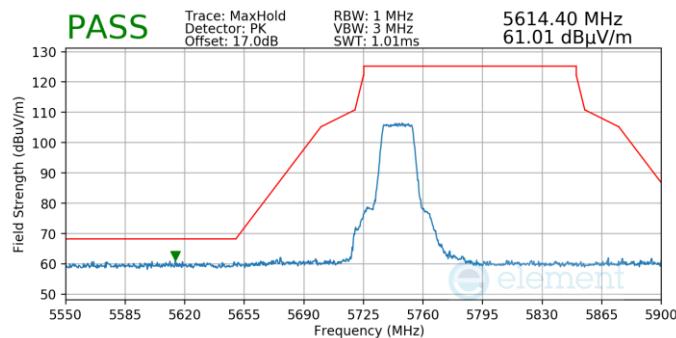


Plot 7-57. (Pk, Ch.149, 802.11n, MCS0)

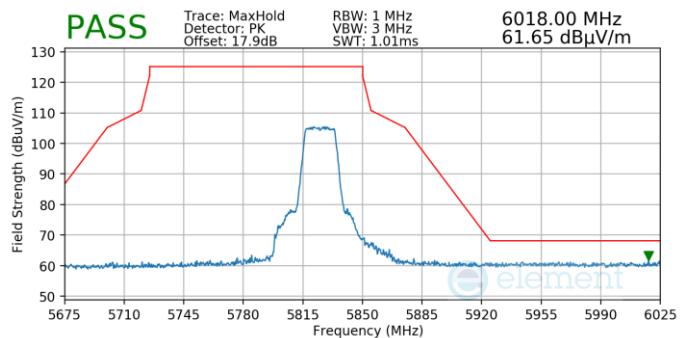

Plot 7-59. (Pk, Ch.165, 802.11n, MCS0)

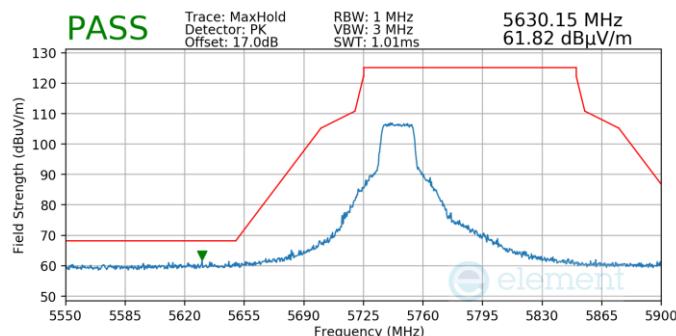

Plot 7-58. (Pk, Ch.149, 802.11n, MCS7)

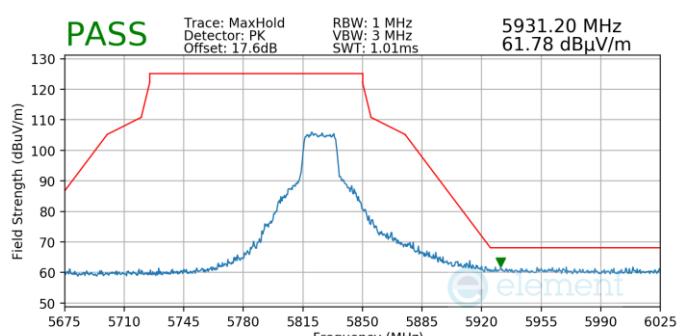

Plot 7-60. (Pk, Ch.165, 802.11n, MCS7)

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 51 of 61 |

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-24 per Section 15.209 and RSS-Gen (8.9).

| Frequency | Field Strength [μ V/m] | Measured Distance [Meters] |
|-------------------|--------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 7-24. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 52 of 61 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

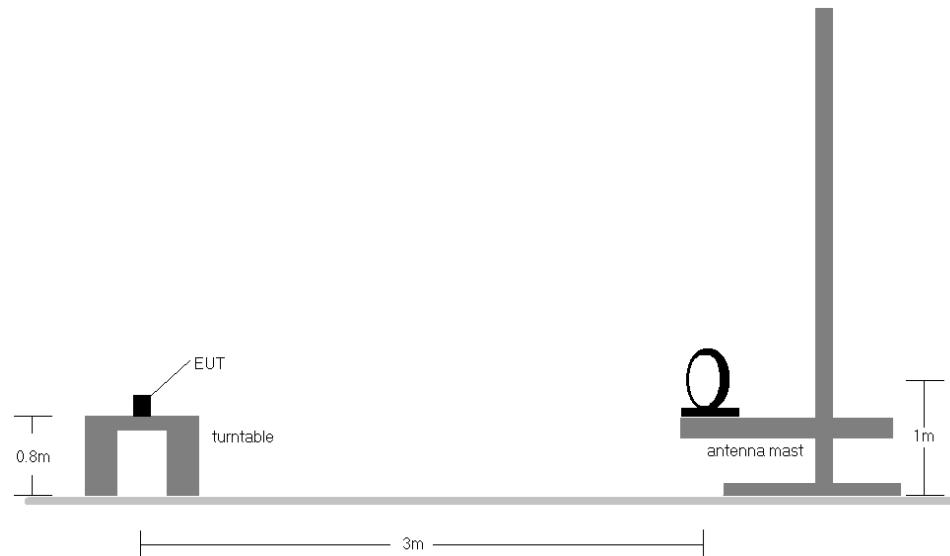


Figure 7-6. Radiated Test Setup < 30MHz

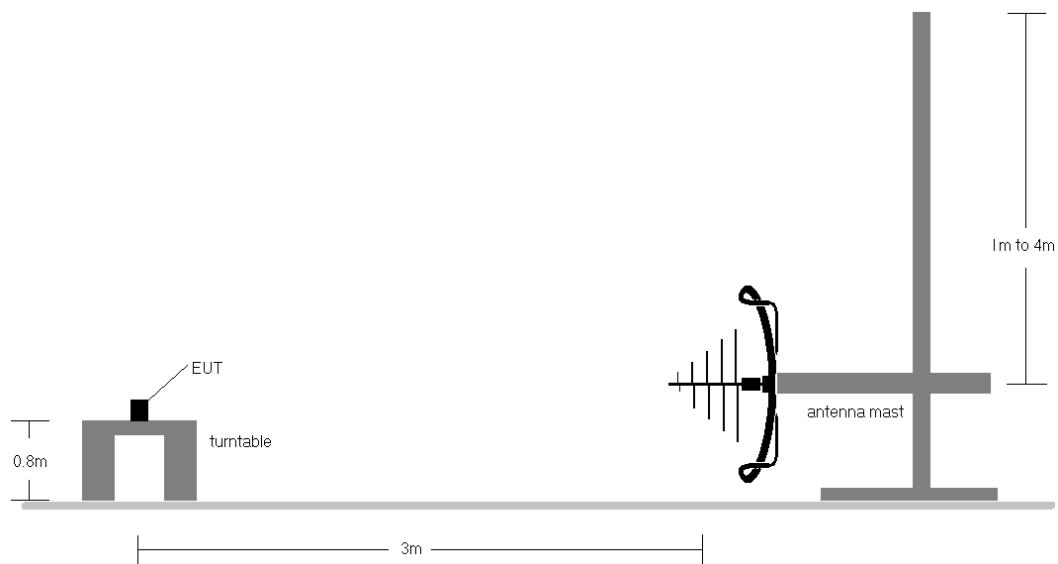


Figure 7-7. Radiated Test Setup < 1GHz

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 53 of 61 |

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-24.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
 - b. EUT powered by host PC via USB-C cable with magnetic charger
10. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}]$ = Antenna Factor $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamp Gain} [\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

| | | | |
|---|---|---------------------------------------|------------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 54 of 61 V 10.5 12/15/2021 |

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

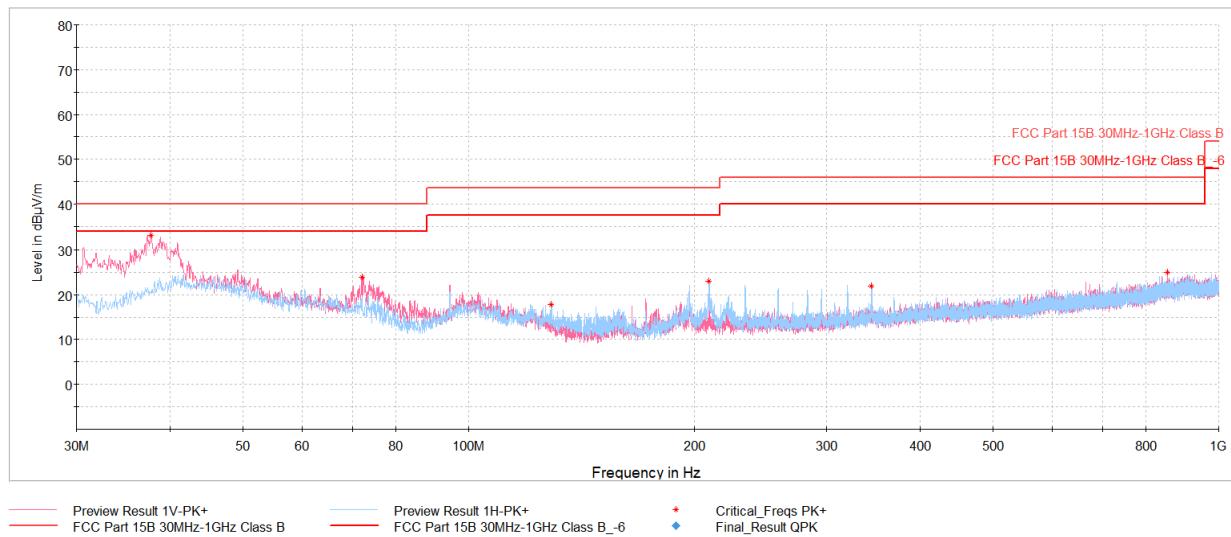

Plot 7-61. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.144 with AC/DC Adapter & magnetic charger

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 37.71 | Max-Peak | V | 100 | 250 | -56.12 | -17.89 | 32.99 | 40.00 | -7.01 |
| 72.10 | Max-Peak | V | 100 | 20 | -62.09 | -21.09 | 23.82 | 40.00 | -16.18 |
| 129.09 | Max-Peak | H | 300 | 322 | -68.20 | -20.93 | 17.87 | 43.52 | -25.65 |
| 208.92 | Max-Peak | H | 100 | 188 | -65.81 | -18.19 | 23.00 | 43.52 | -20.52 |
| 344.38 | Max-Peak | H | 100 | 112 | -71.34 | -13.76 | 21.90 | 46.02 | -24.12 |
| 855.08 | Max-Peak | V | 100 | 325 | -77.18 | -4.91 | 24.91 | 46.02 | -21.11 |


Table 7-25. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.144 with AC/DC Adapter & magnetic charger

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 55 of 61 |

7.7.1 Simultaneous TX Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

| Description | Bluetooth | UNII |
|---------------------------|-----------|---------|
| Antenna | FCM | FCM |
| Channel | 78 | 36 |
| Operating Frequency (MHz) | 2480 | 5180 |
| Mode/Modulation | GFSK ePA | 802.11n |

Table 7-26. Worst Case Simultaneous Transmission Configuration

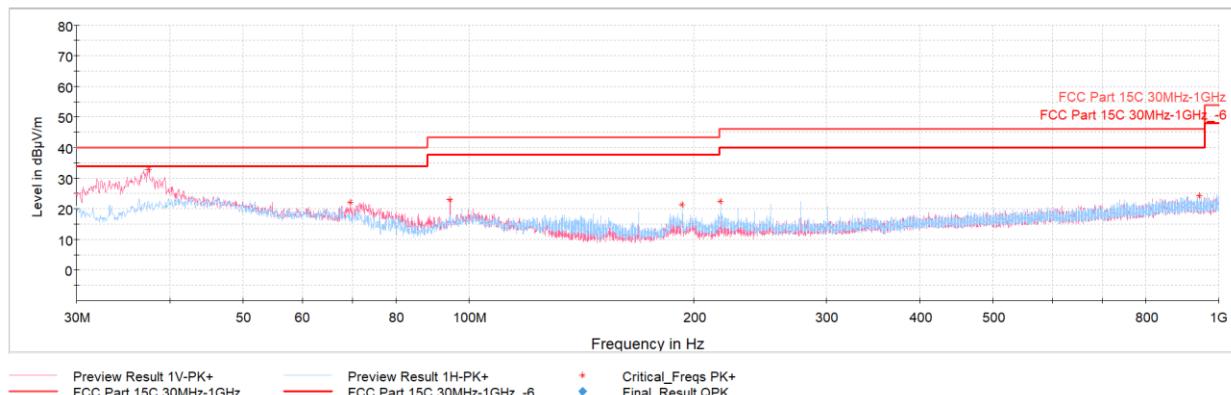

Plot 7-62. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter & magnetic charger

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 37.47 | Max-Peak | V | 100 | 299 | -56.03 | -17.97 | 33.00 | 40.00 | -7.00 |
| 69.53 | Max-Peak | V | 100 | 19 | -64.51 | -20.27 | 22.22 | 40.00 | -17.78 |
| 94.46 | Max-Peak | V | 100 | 354 | -65.12 | -18.86 | 23.02 | 43.52 | -20.50 |
| 192.57 | Max-Peak | H | 200 | 177 | -67.73 | -18.01 | 21.26 | 43.52 | -22.26 |
| 216.63 | Max-Peak | H | 100 | 125 | -66.99 | -17.72 | 22.29 | 46.02 | -23.73 |
| 942.67 | Max-Peak | H | 100 | 220 | -78.60 | -4.30 | 24.10 | 46.02 | -21.92 |

Table 7-27. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter & magnetic charger

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 56 of 61 |

7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

| Frequency of emission (MHz) | Conducted Limit (dB μ V) | |
|--------------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

Table 7-28. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | |
|---|---|---------------------------------------|------------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 57 of 61 V 10.5 12/15/2021 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


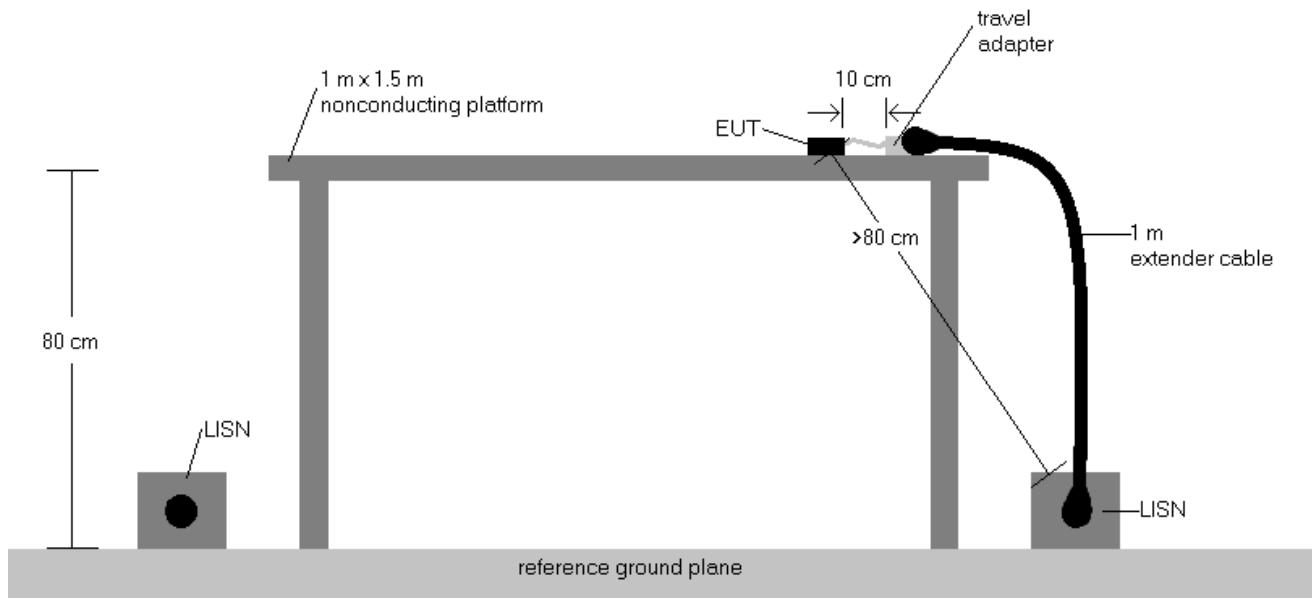


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
 - b. EUT powered by host PC via USB-C cable with magnetic charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 58 of 61 |

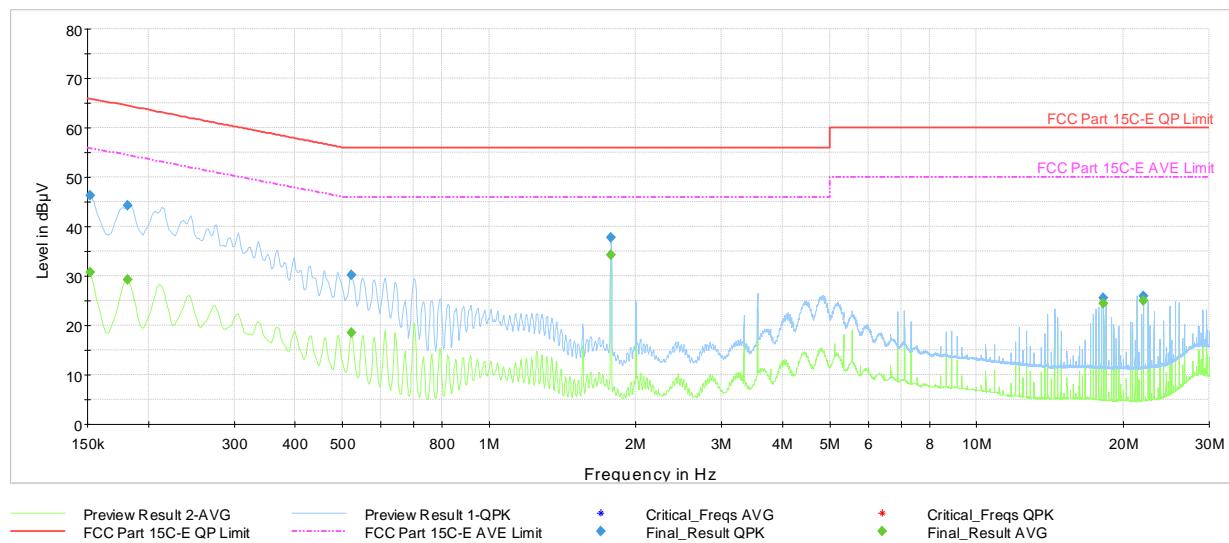


Plot 7-63. AC Line Conducted Plot with 802.11n – Ch.144 (L1), with AC/DC Adapter & magnetic charger

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.152 | FINAL | — | 30.66 | 55.88 | -25.22 | L1 | GND |
| 0.152 | FINAL | 46.3 | — | 65.88 | -19.61 | L1 | GND |
| 0.182 | FINAL | — | 29.20 | 54.42 | -25.21 | L1 | GND |
| 0.182 | FINAL | 44.2 | — | 64.42 | -20.23 | L1 | GND |
| 0.521 | FINAL | — | 18.53 | 46.00 | -27.47 | L1 | GND |
| 0.521 | FINAL | 30.3 | — | 56.00 | -25.75 | L1 | GND |
| 1.777 | FINAL | 37.7 | — | 56.00 | -18.28 | L1 | GND |
| 1.777 | FINAL | — | 34.18 | 46.00 | -11.82 | L1 | GND |
| 18.222 | FINAL | 25.6 | — | 60.00 | -34.40 | L1 | GND |
| 18.222 | FINAL | — | 24.53 | 50.00 | -25.47 | L1 | GND |
| 22.000 | FINAL | — | 25.08 | 50.00 | -24.92 | L1 | GND |
| 22.000 | FINAL | 26.0 | — | 60.00 | -33.99 | L1 | GND |

Table 7-29. AC Line Conducted Data with 802.11n – Ch.144 (L1) with AC/DC Adapter & magnetic charger

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 59 of 61 |

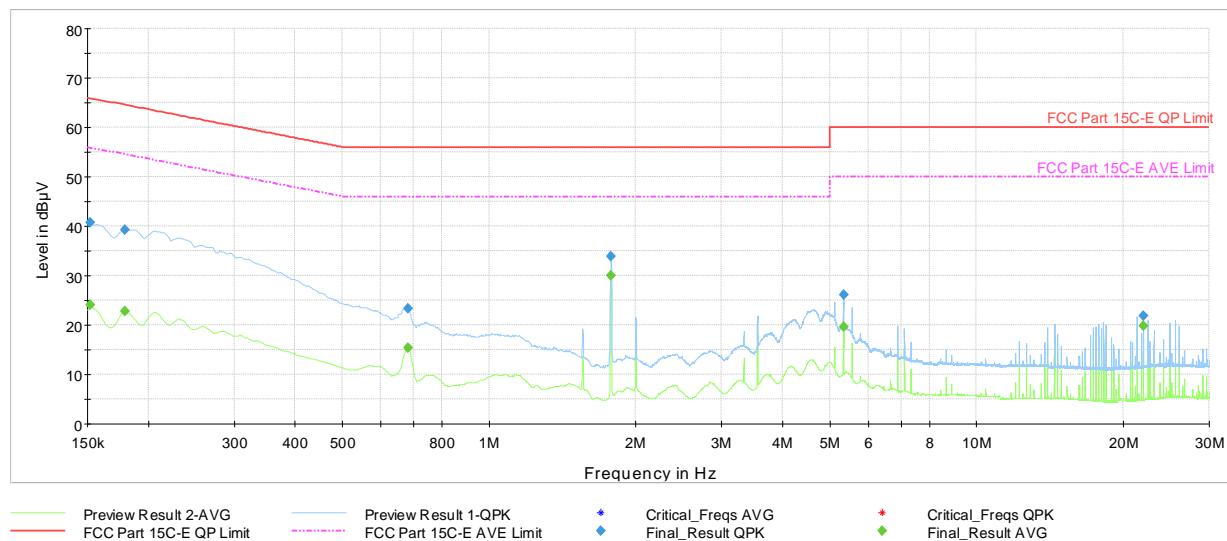

Plot 7-64. AC Line Conducted Plot with 802.11n- Ch.144 (N), with AC/DC Adapter & magnetic charger

| Frequency [MHz] | Process State | QuasiPeak [dB μ V] | Average [dB μ V] | Limit [dB μ V] | Margin [dB] | Line | PE |
|-----------------|---------------|------------------------|----------------------|--------------------|-------------|------|-----|
| 0.152 | FINAL | — | 24.01 | 55.88 | -31.86 | N | GND |
| 0.152 | FINAL | 40.7 | — | 65.88 | -25.14 | N | GND |
| 0.179 | FINAL | — | 22.74 | 54.52 | -31.78 | N | GND |
| 0.179 | FINAL | 39.3 | — | 64.52 | -25.23 | N | GND |
| 0.681 | FINAL | — | 15.45 | 46.00 | -30.55 | N | GND |
| 0.681 | FINAL | 23.4 | — | 56.00 | -32.62 | N | GND |
| 1.777 | FINAL | 34.0 | — | 56.00 | -22.02 | N | GND |
| 1.777 | FINAL | — | 29.92 | 46.00 | -16.08 | N | GND |
| 5.334 | FINAL | 26.2 | — | 60.00 | -33.85 | N | GND |
| 5.334 | FINAL | — | 19.61 | 50.00 | -30.39 | N | GND |
| 22.000 | FINAL | — | 19.83 | 50.00 | -30.17 | N | GND |
| 22.000 | FINAL | 21.9 | — | 60.00 | -38.06 | N | GND |

Table 7-30. AC Line Conducted Data with 802.11n- Ch.144 (N), with AC/DC Adapter & magnetic charger

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 60 of 61 |

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Watch**

FCC ID: BCG-A2980 and **IC: 579C-A2980** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

| | | | |
|---|---|---------------------------------------|-----------------------------------|
| FCC ID: BCG-A2980 IC: 579C-A2980 |  element | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2305110022-09.BCG | Test Dates: 6/7/2023 - 8/11/2023 | EUT Type: Watch | Page 61 of 61 |

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

V 10.5 12/15/2021