





Plot 7-108. Lower Band Edge Plot (LTE Band 12 - 5MHz QPSK – Full RB)

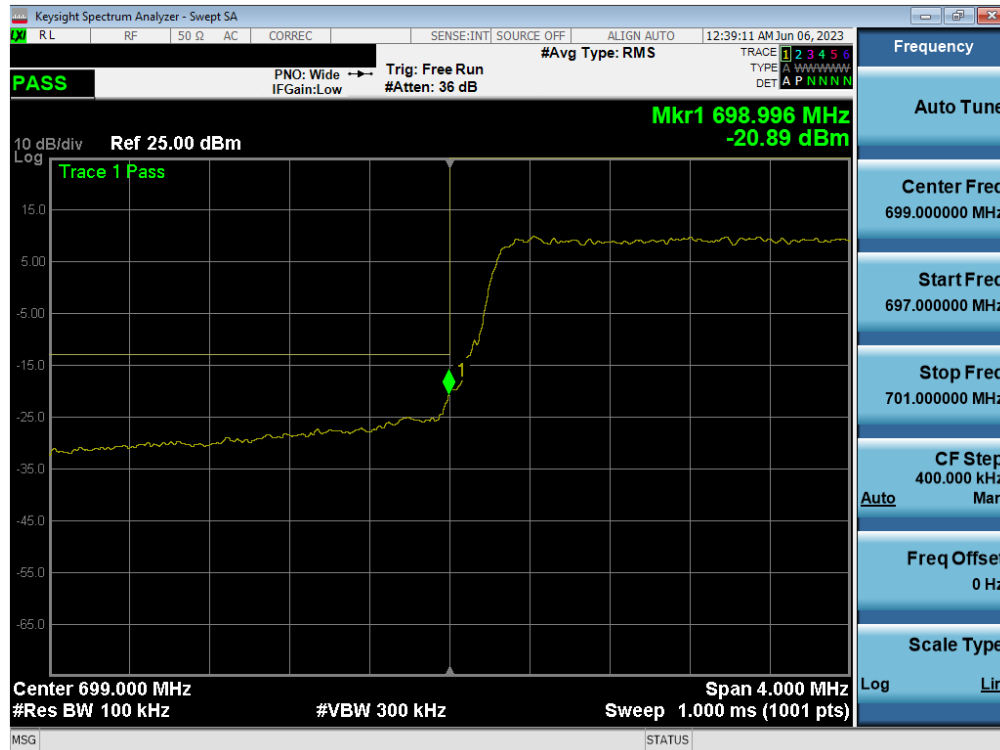

Plot 7-109. Upper Band Edge Plot (LTE Band 12 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2984	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 75 of 120

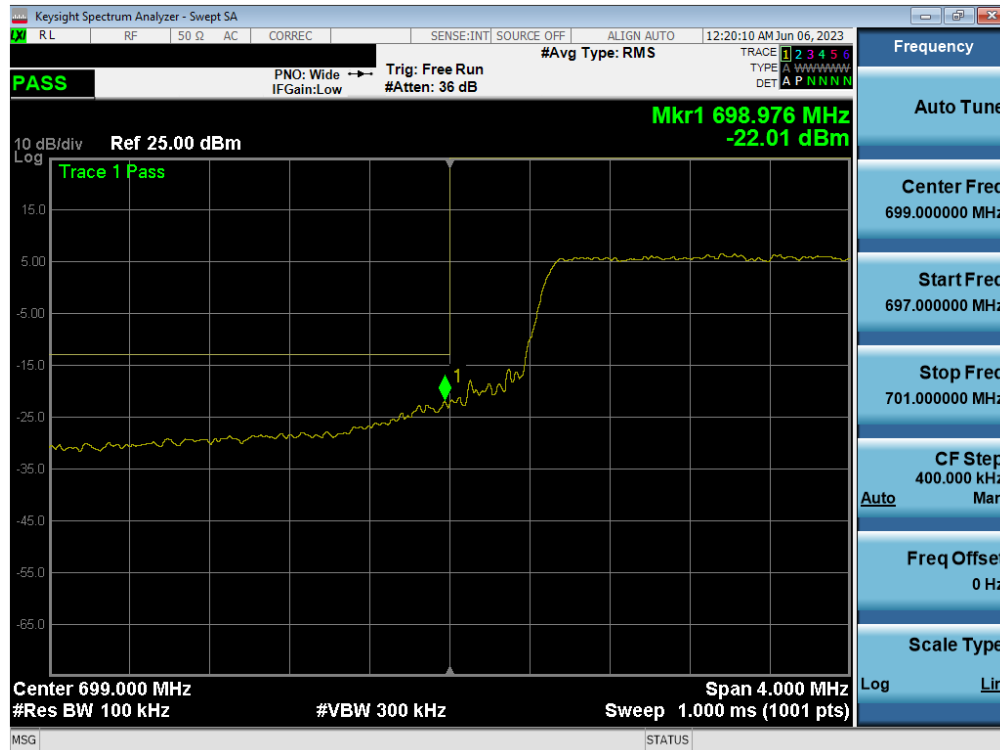

Plot 7-110. Lower Band Edge Plot (LTE Band 12 - 10MHz QPSK – Full RB)




Plot 7-111. Upper Band Edge Plot (LTE Band 12 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2984	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 76 of 120

V2.1 11/9/2021

LTE Band 17

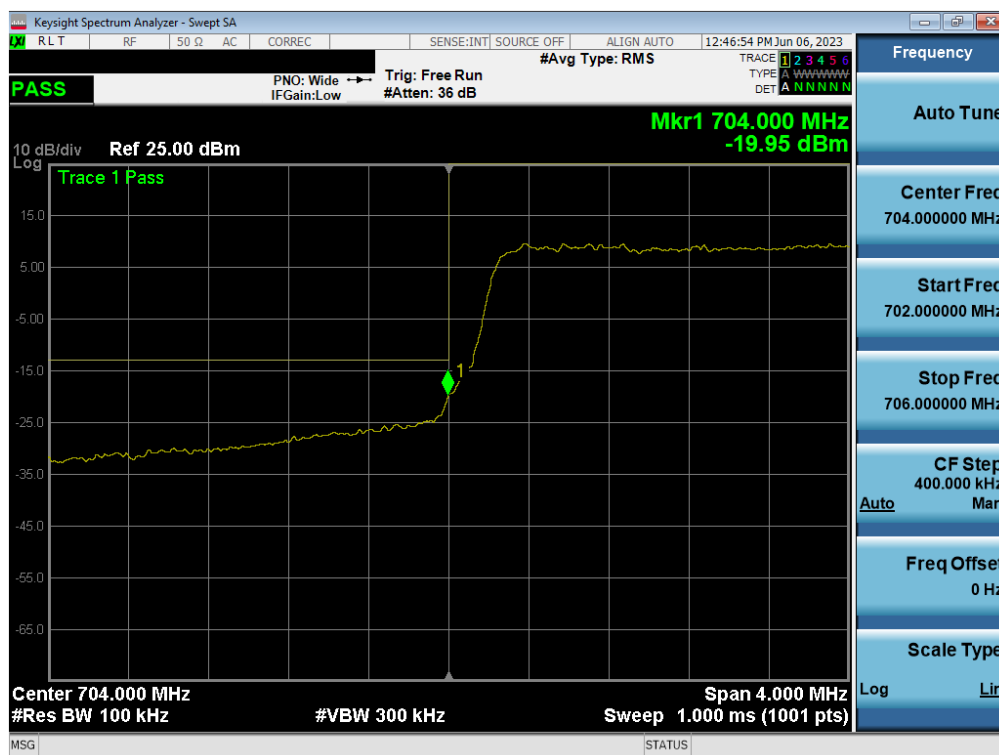


Plot 7-112. Lower Band Edge Plot (LTE Band 17 - 5MHz QPSK – Full RB)



Plot 7-113. Upper Band Edge Plot (LTE Band 17 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 77 of 120

V2.1 11/9/2021

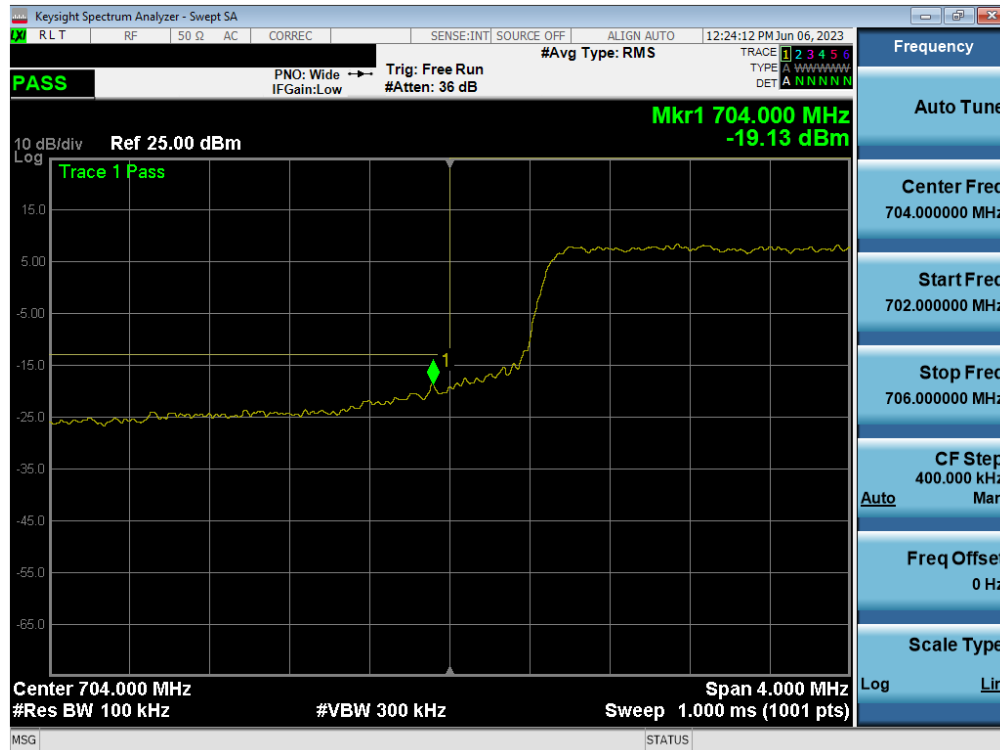

Plot 7-114. Lower Band Edge Plot (LTE Band 17 - 10MHz QPSK – Full RB)




Plot 7-115. Upper Band Edge Plot (LTE Band 17 - 10MHz QPSK – Full RB)


FCC ID: BCG-A2984	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 78 of 120

V2.1 11/9/2021

LTE Band 13

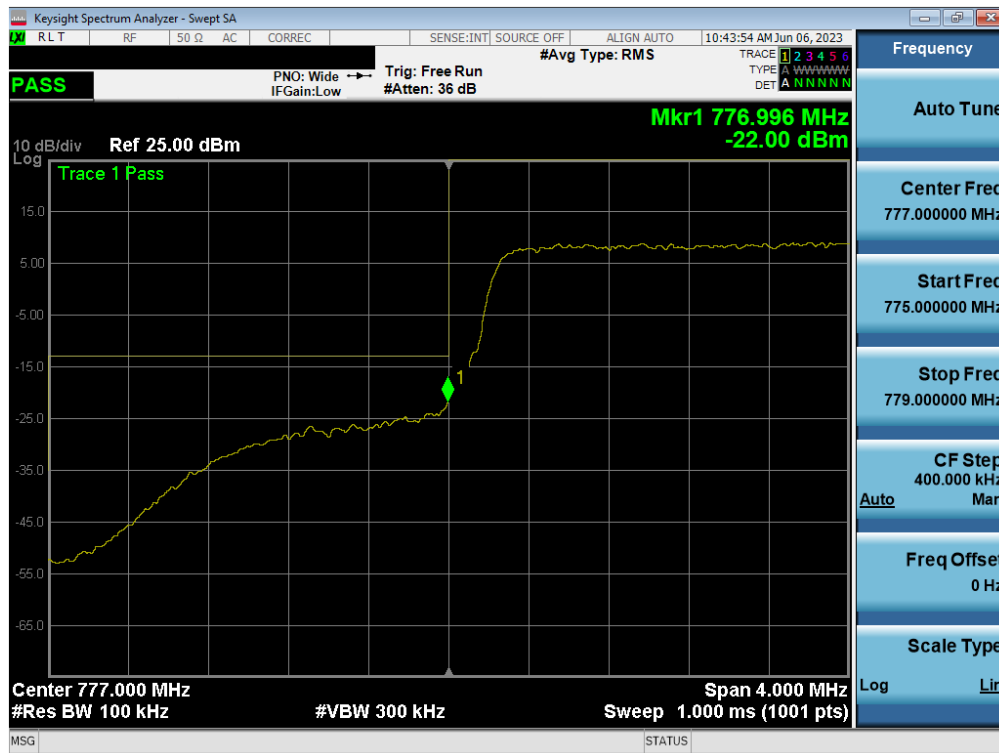

Plot 7-116. Lower Band Edge Plot (LTE Band 13 - 5MHz QPSK – Full RB)

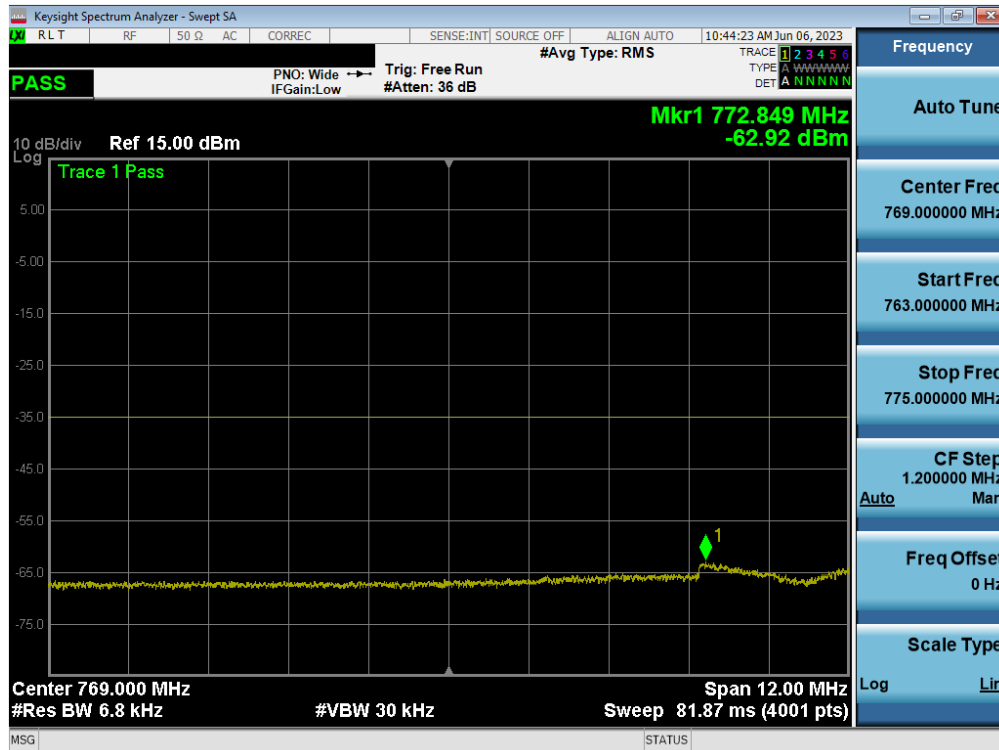

Plot 7-117. Lower Emission Mask Plot (LTE Band 13 - 5MHz QPSK – Full RB)


FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 79 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.




Plot 7-118. Upper Band Edge Plot (LTE Band 13 - 5MHz QPSK – Full RB)

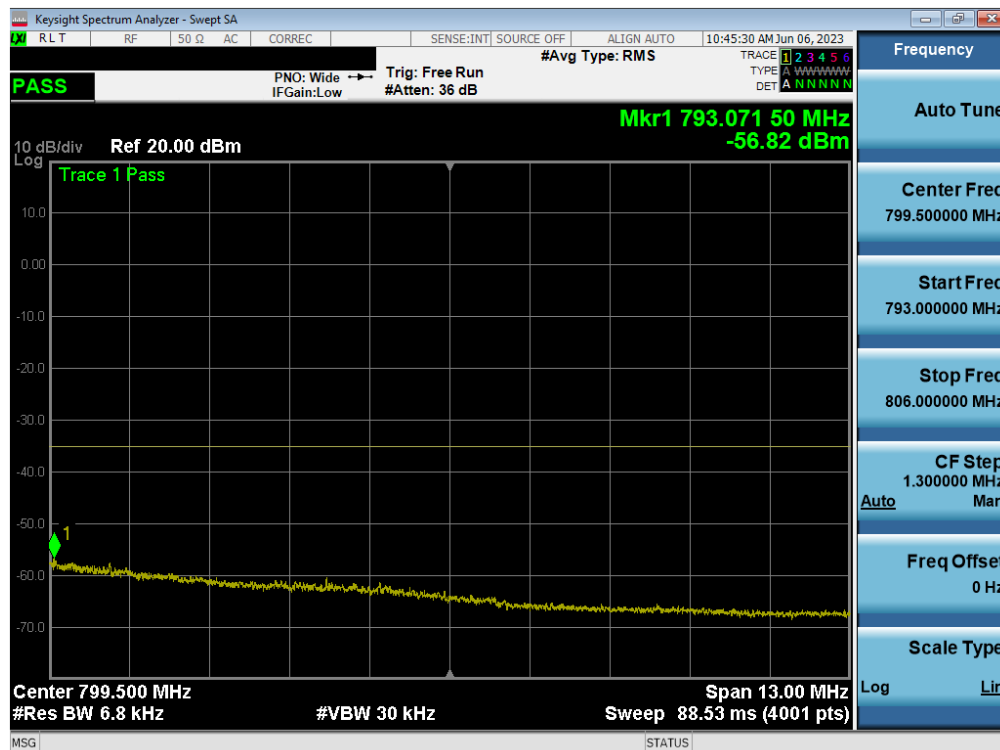


Plot 7-119. Upper Emission Mask Plot (LTE Band 13 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2984	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 80 of 120

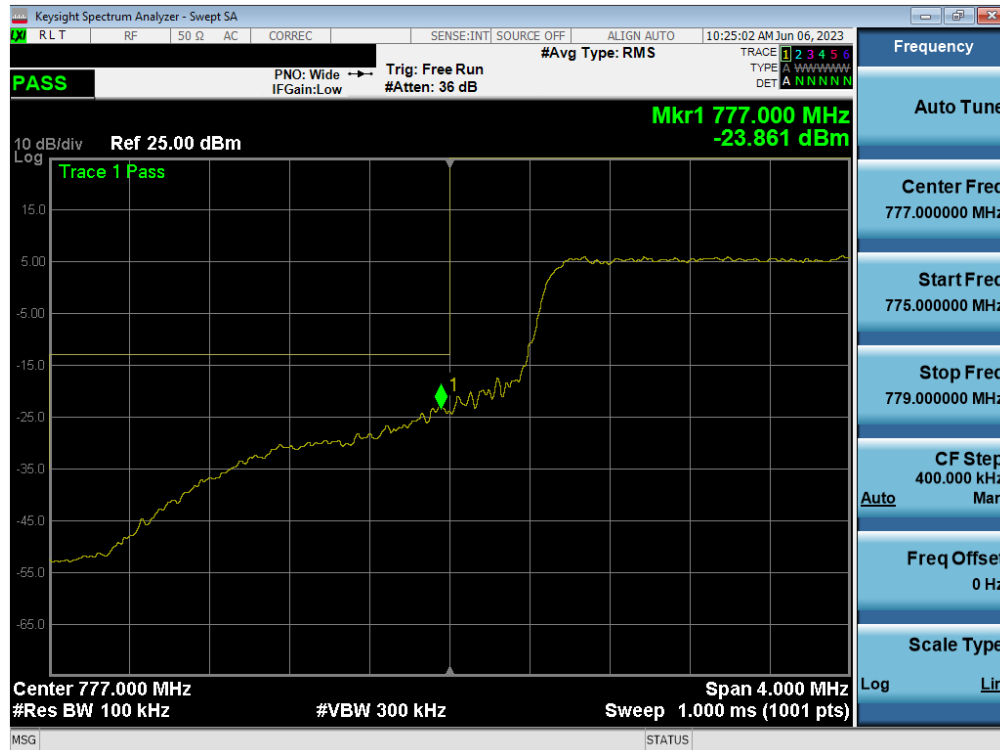

Plot 7-120. Lower Band Edge Plot (LTE Band 13 - 10MHz QPSK – Full RB)

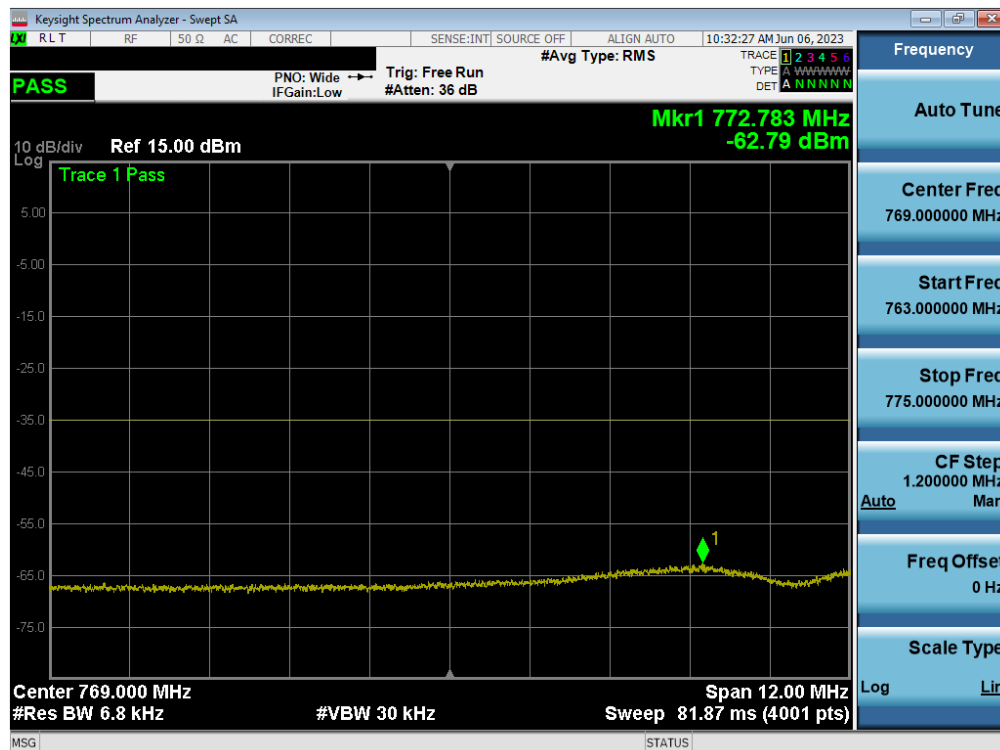

Plot 7-121. Lower Emission Mask Plot (LTE Band 13 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2984	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 81 of 120

V2.1 11/9/2021




Plot 7-122. Upper Band Edge Plot (LTE Band 13 - 10MHz QPSK – Full RB)




Plot 7-123. Upper Emission Mask Plot (LTE Band 13 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2984	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 82 of 120

V2.1 11/9/2021

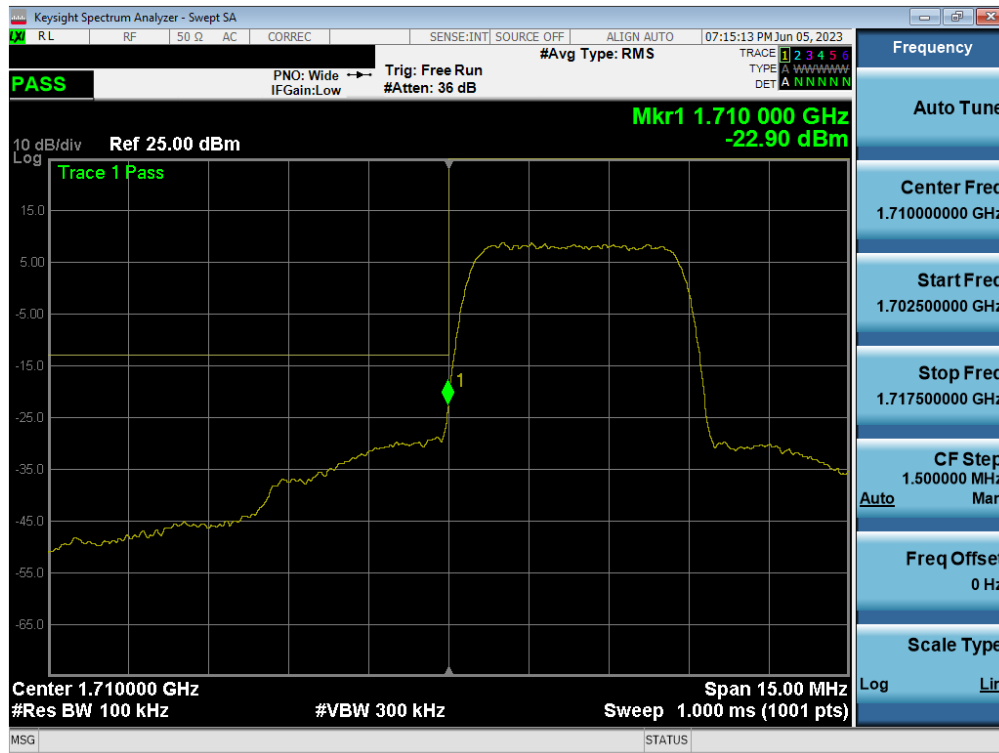

Plot 7-124. Lower Band Edge Plot (WCDMA AWS – Ch. 1312)

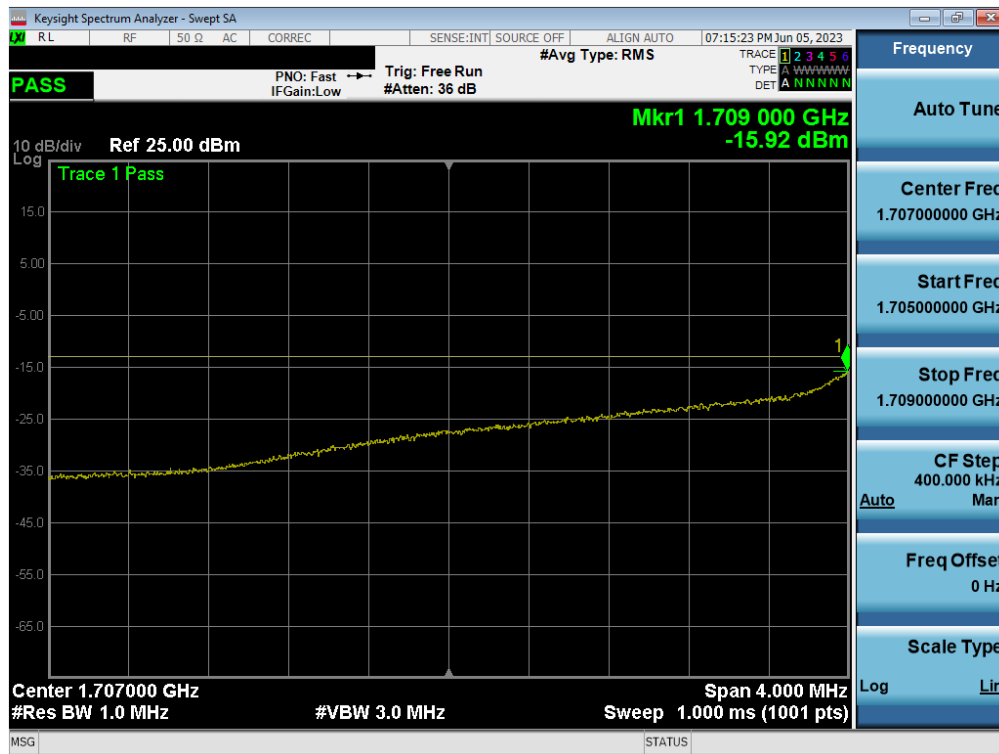

Plot 7-125. Lower Extended Band Edge Plot (WCDMA AWS – Ch. 1312)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 83 of 120



Plot 7-126. Upper Band Edge Plot (WCDMA AWS – Ch. 1513)



Plot 7-127. Upper Extended Band Edge Plot (WCDMA AWS – Ch. 1513)

FCC ID: BCG-A2984	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 84 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Peak-Average Ratio

§27.50(d)(5)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW $\geq$ OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

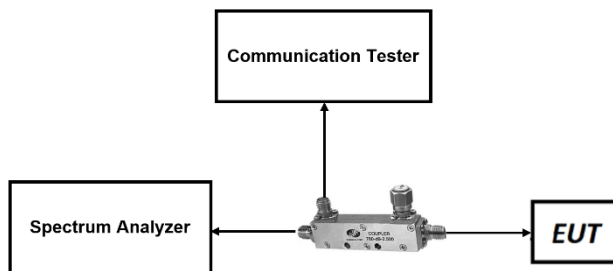


Figure 7-4. Test Instrument & Measurement Setup



Test Notes

None.

FCC ID: BCG-A2984		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 85 of 120

V2.1 11/9/2021



LTE Band 66

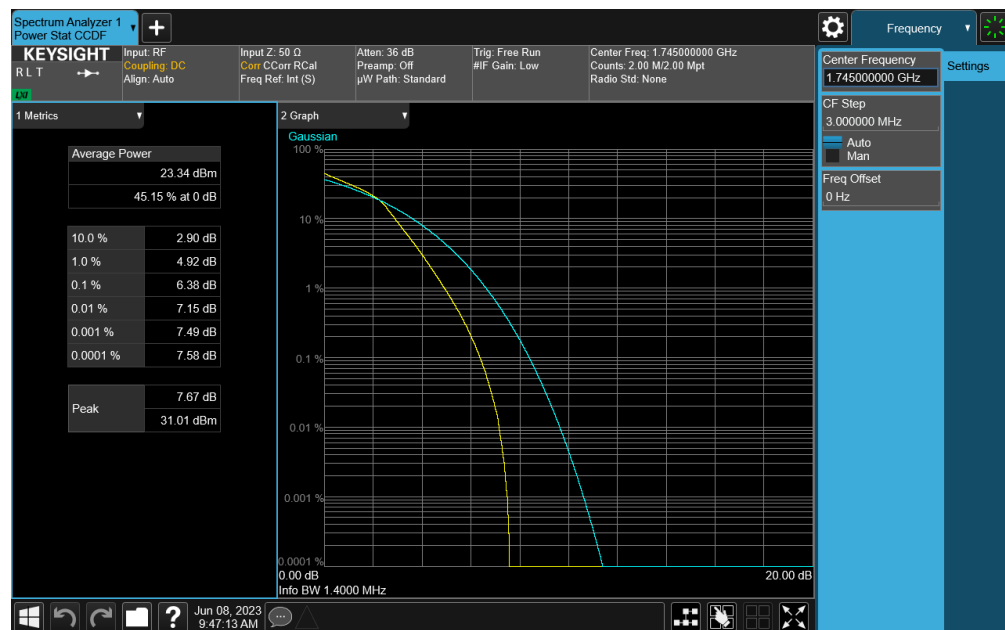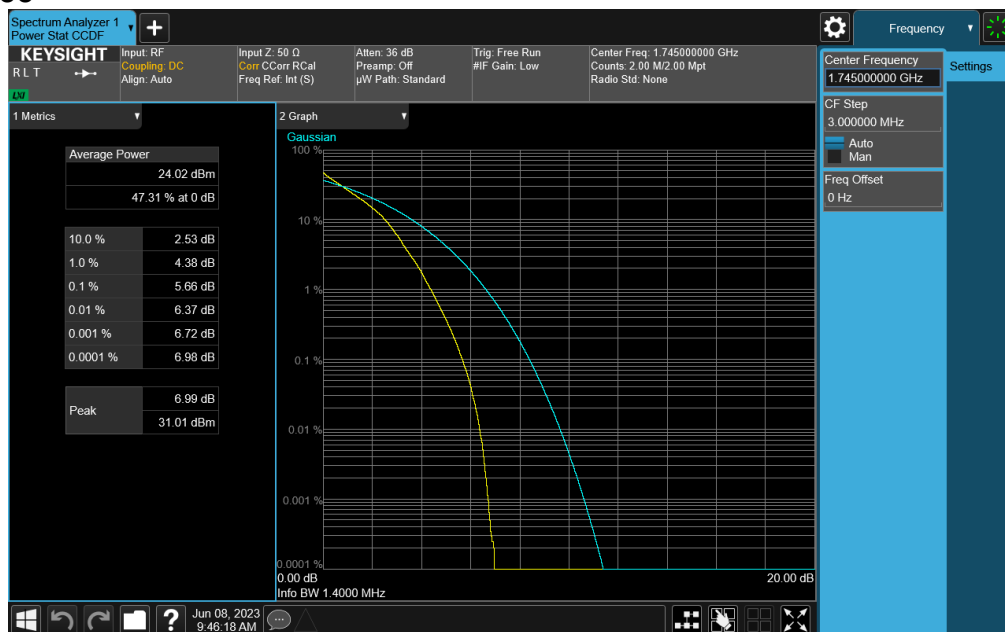

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 86 of 120

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

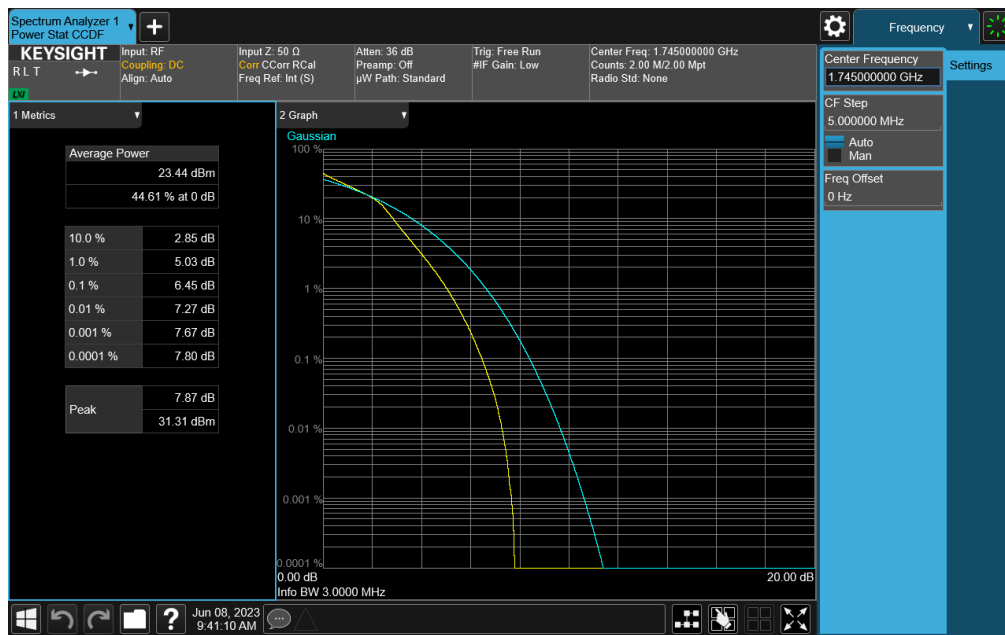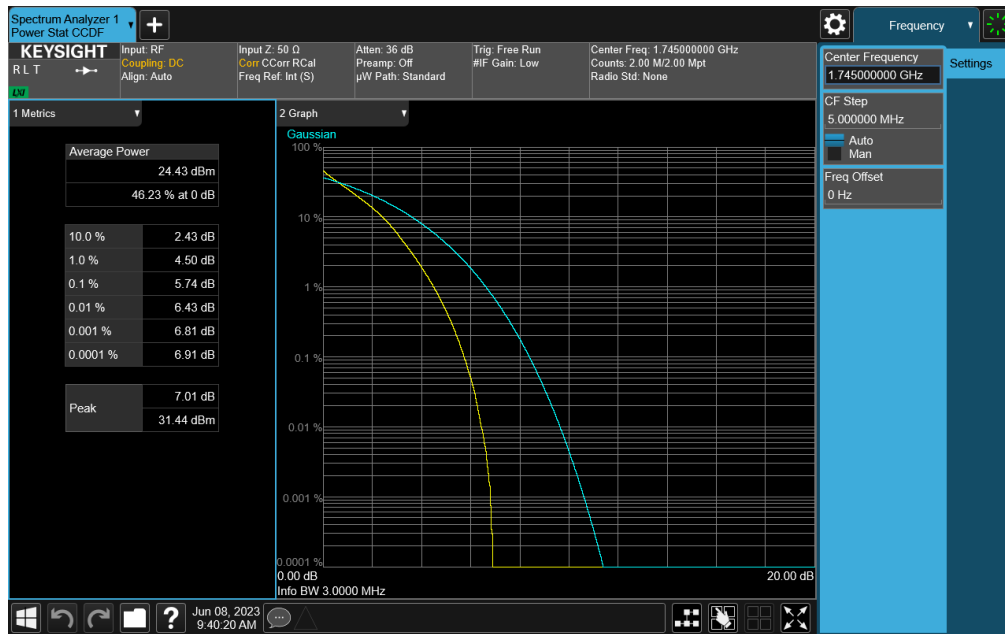


FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 87 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

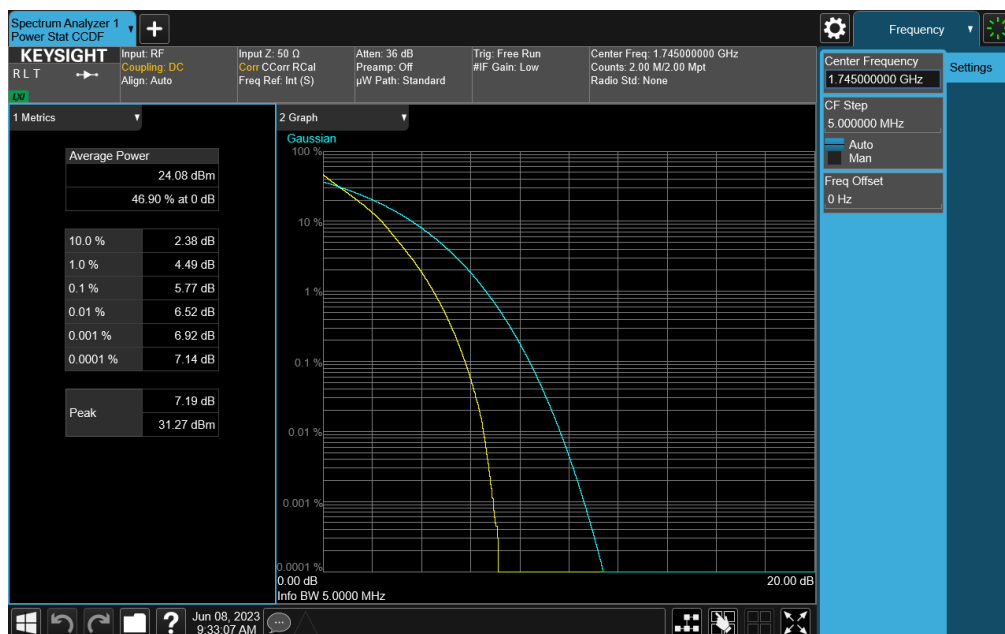

Plot 7-132. PAR Plot (LTE Band 66 - 5MHz QPSK - Full RB)

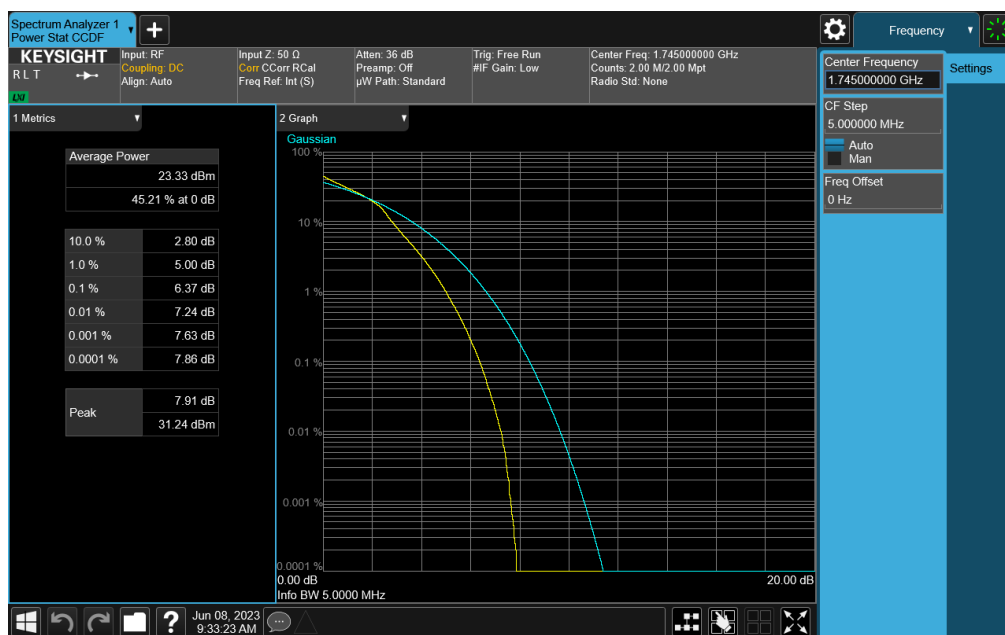


Plot 7-133. PAR Plot (LTE Band 66 - 5MHz 16-QAM - Full RB)


FCC ID: BCG-A2984	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 88 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

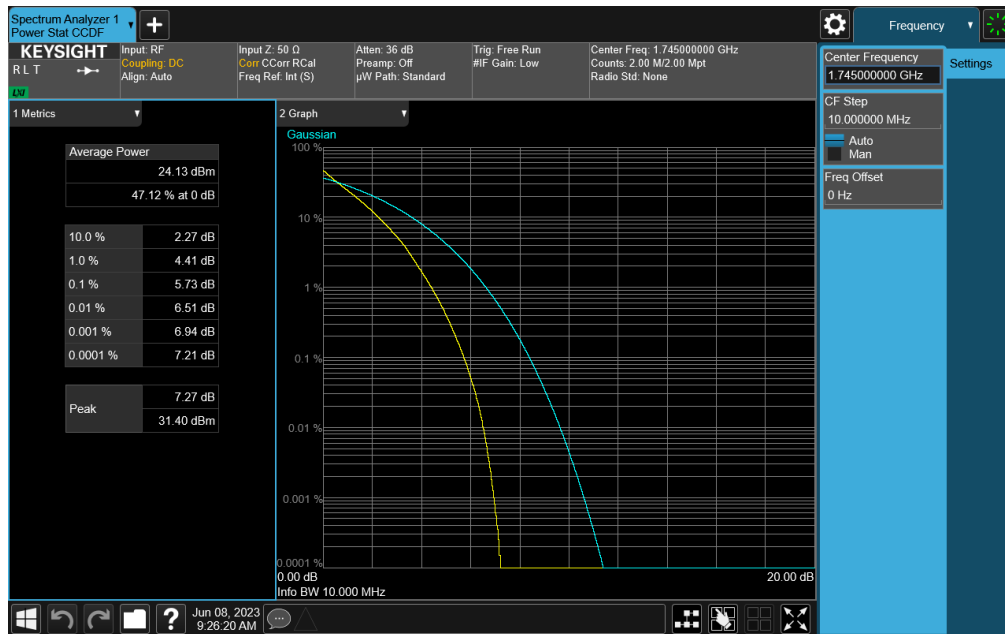

Plot 7-134. PAR Plot (LTE Band 66 - 10MHz QPSK - Full RB)


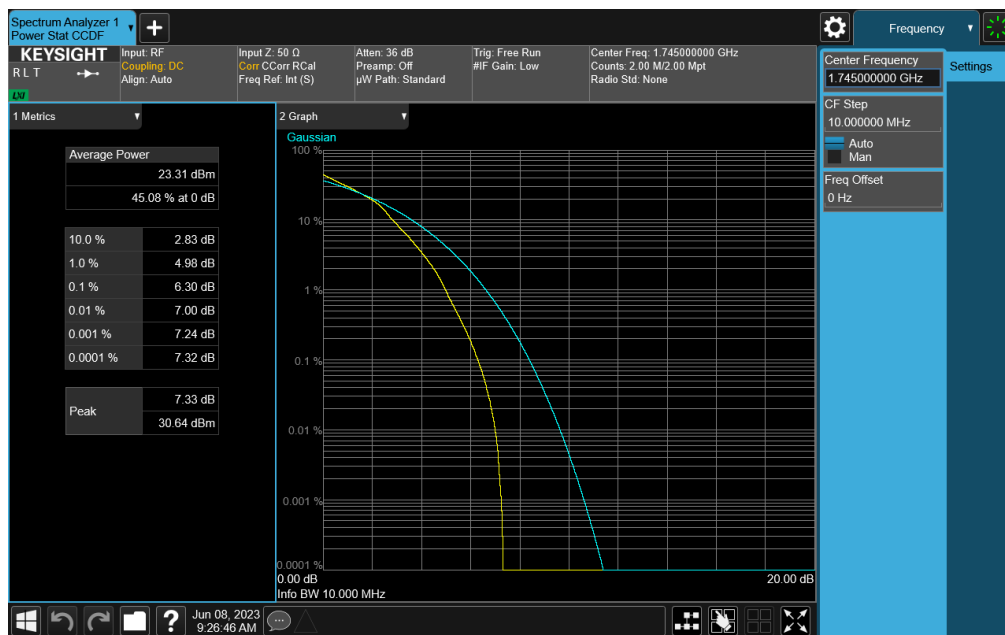


Plot 7-135. PAR Plot (LTE Band 66 - 10MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 89 of 120

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

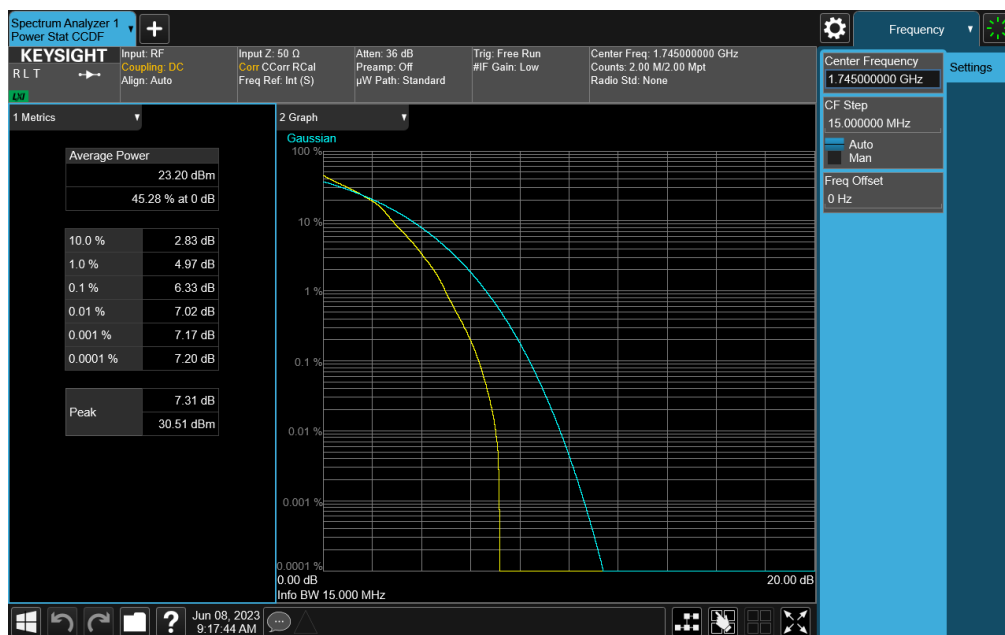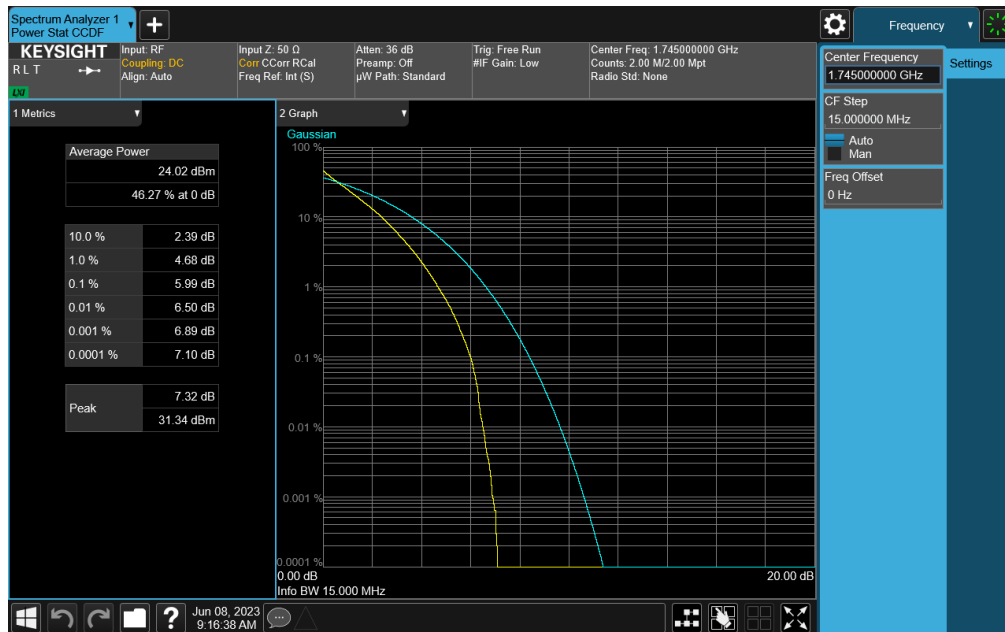


FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 90 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

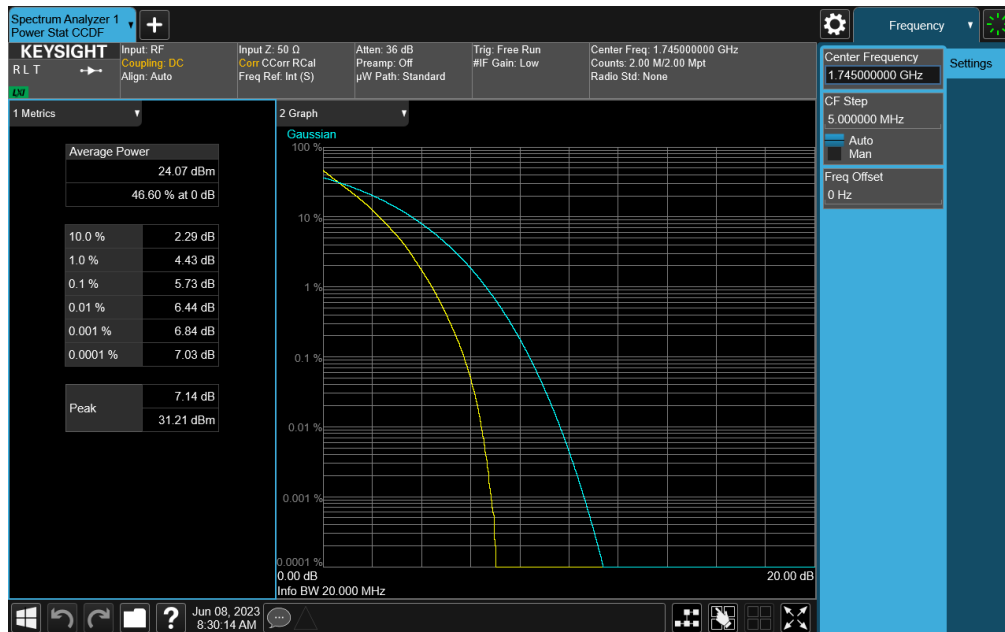

Plot 7-138. PAR Plot (LTE Band 66 - 20MHz QPSK - Full RB)

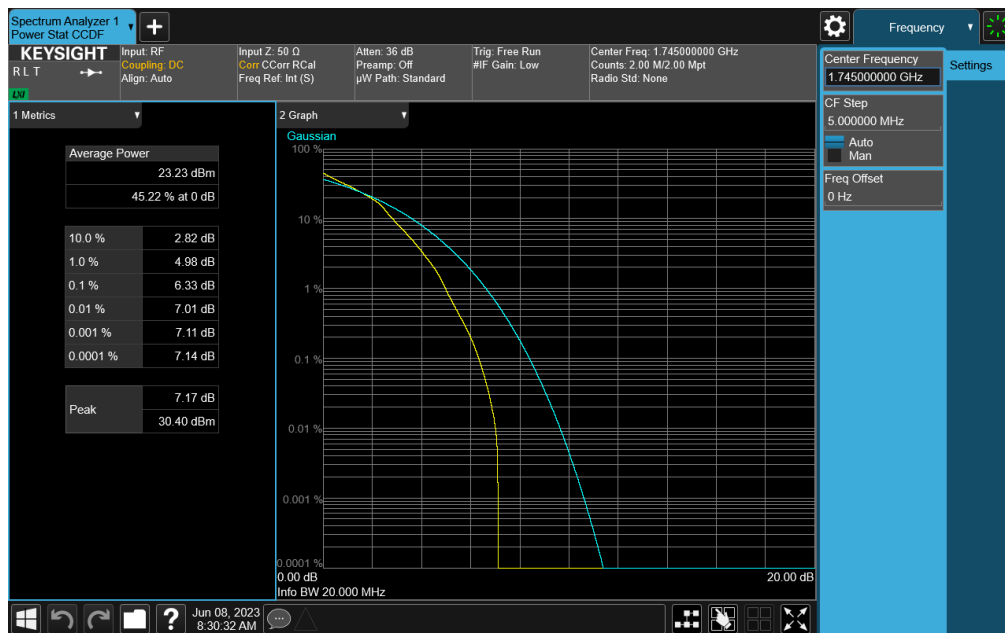


Plot 7-139. PAR Plot (LTE Band 66 - 20MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 91 of 120


V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

LTE Band 4

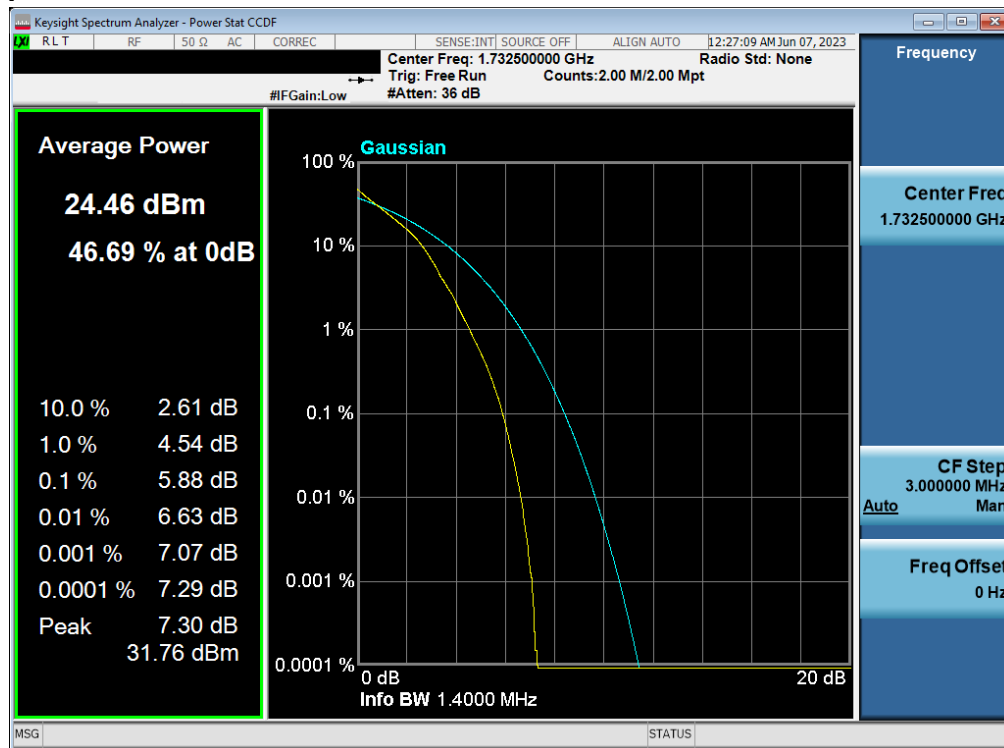


Plot 7-140. PAR Plot (LTE Band 4 - 1.4MHz QPSK - Full RB)

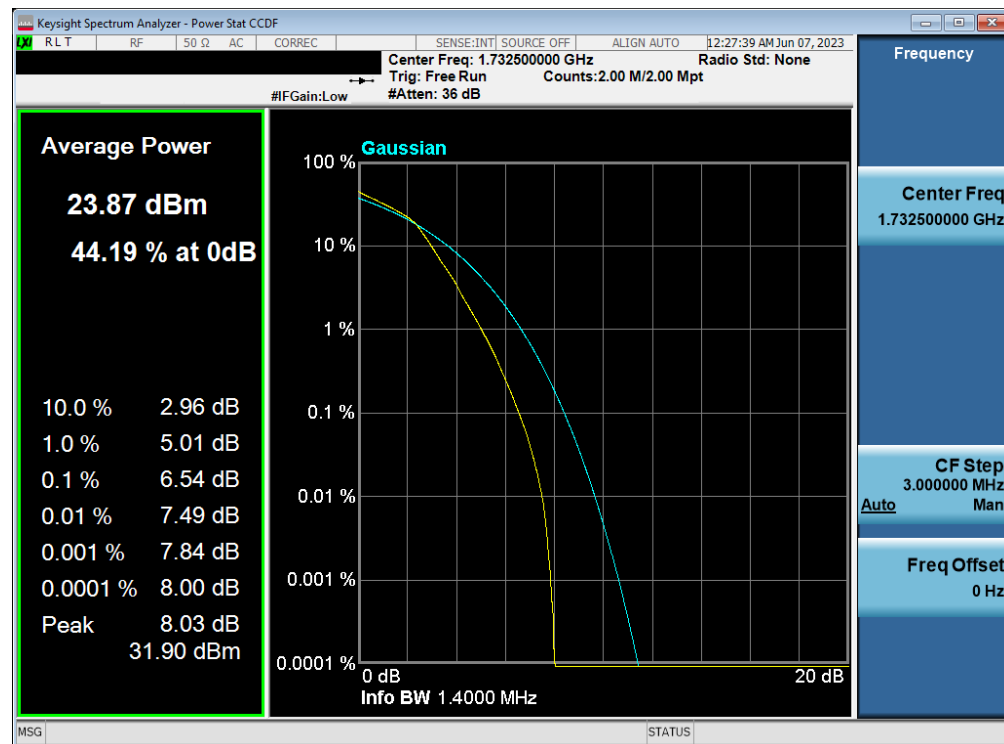


Plot 7-141. PAR Plot (LTE Band 4 - 1.4MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 92 of 120

V2.1 11/9/2021

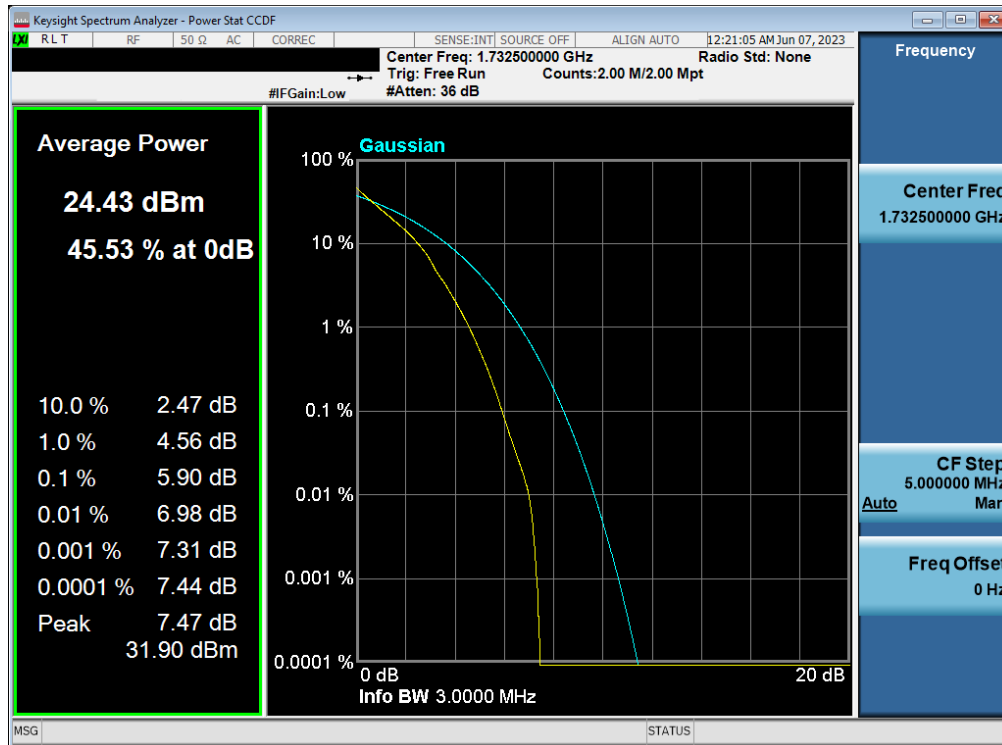


Plot 7-142. PAR Plot (LTE Band 4 - 3MHz QPSK - Full RB)

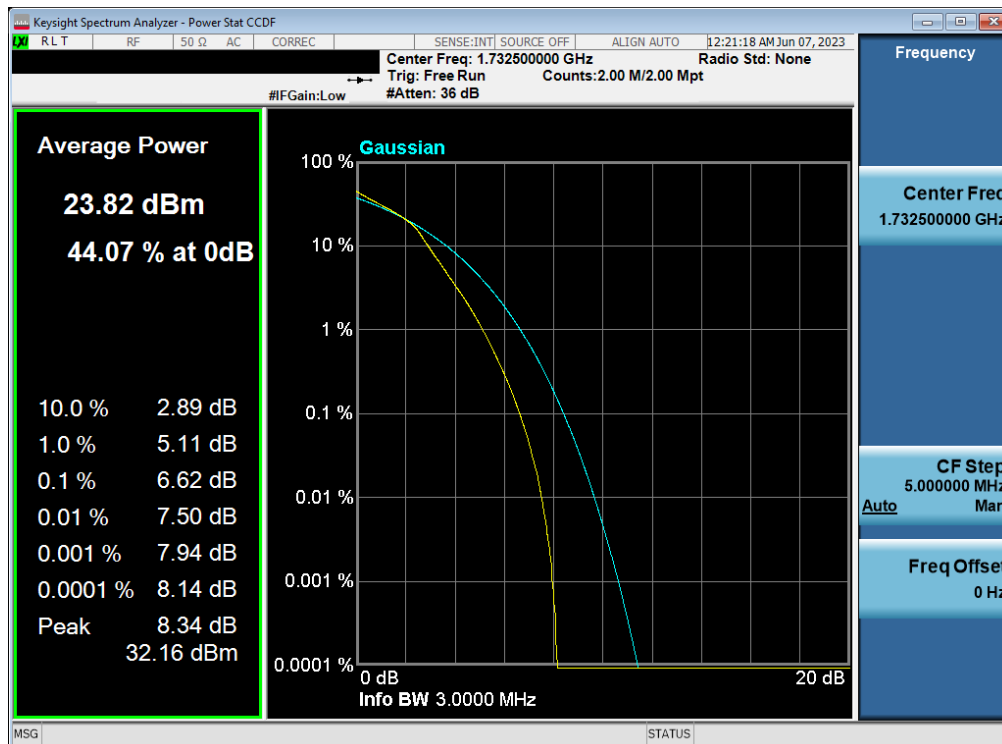


Plot 7-143. PAR Plot (LTE Band 4 - 3MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	element PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 93 of 120

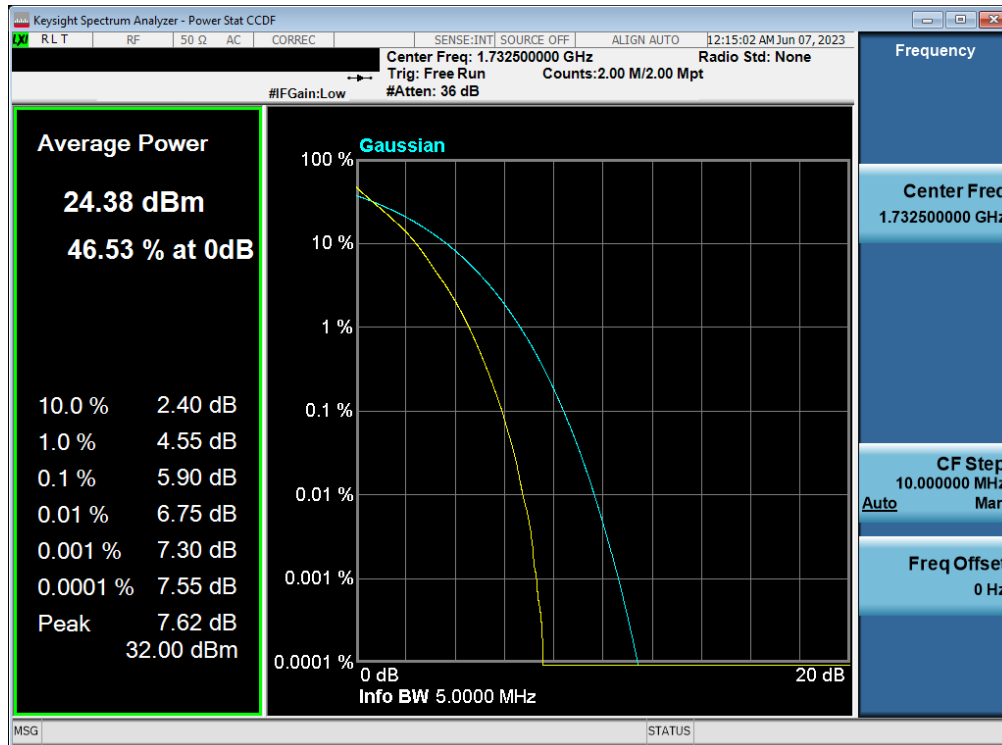


Plot 7-144. PAR Plot (LTE Band 4 - 5MHz QPSK - Full RB)

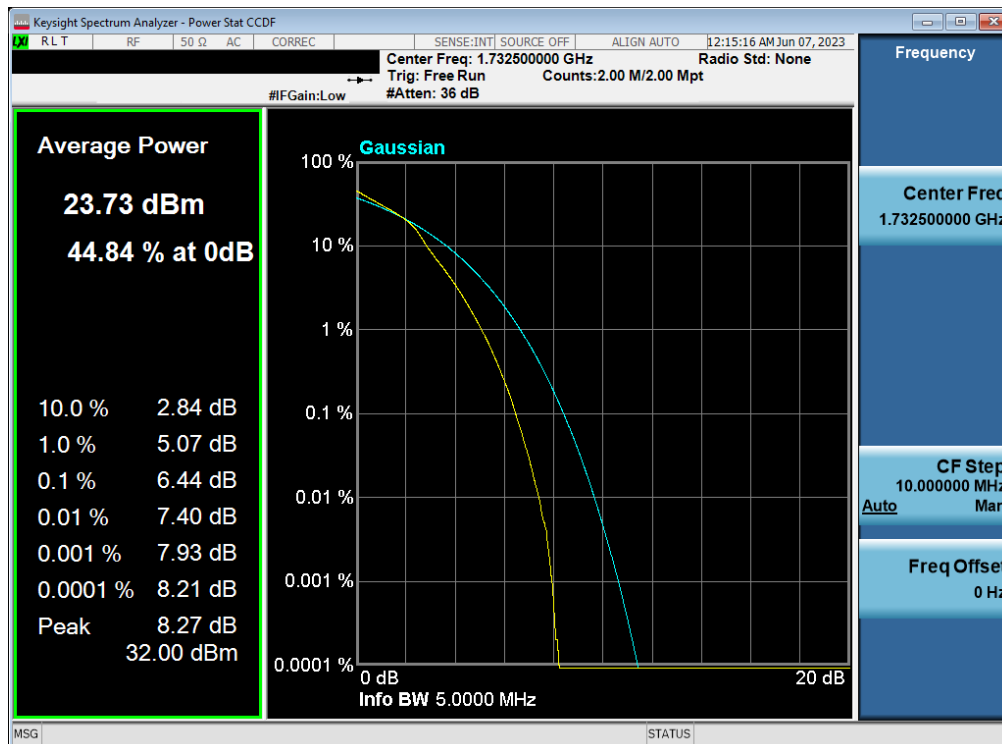


Plot 7-145. PAR Plot (LTE Band 4 - 5MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	element PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 94 of 120

V2.1 11/9/2021

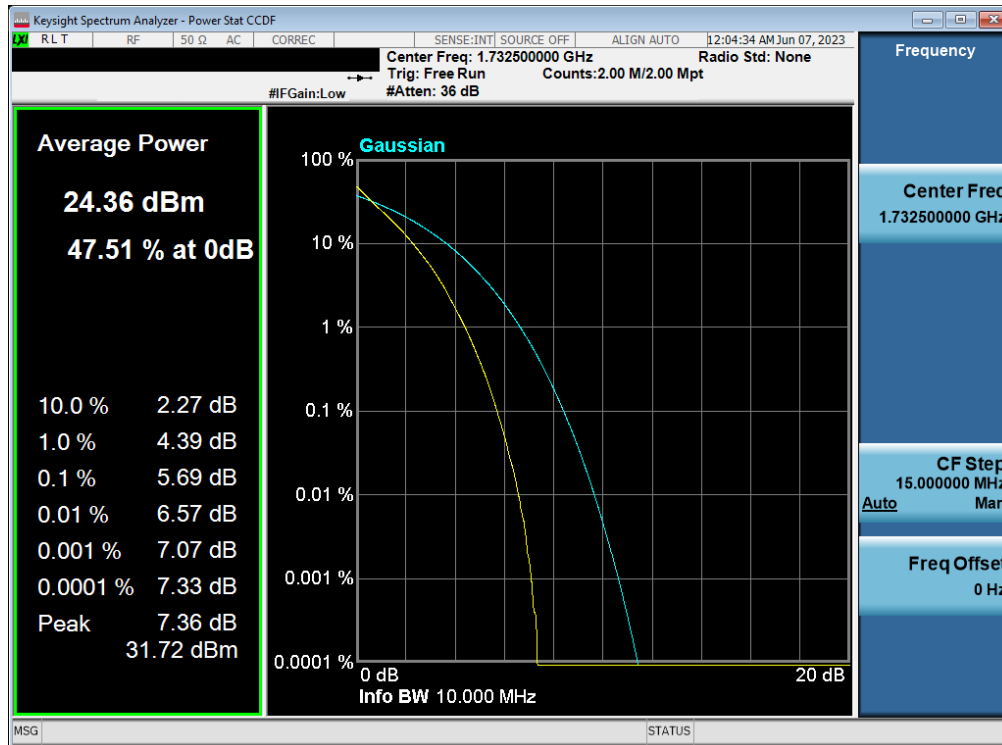


Plot 7-146. PAR Plot (LTE Band 4 - 10MHz QPSK - Full RB)

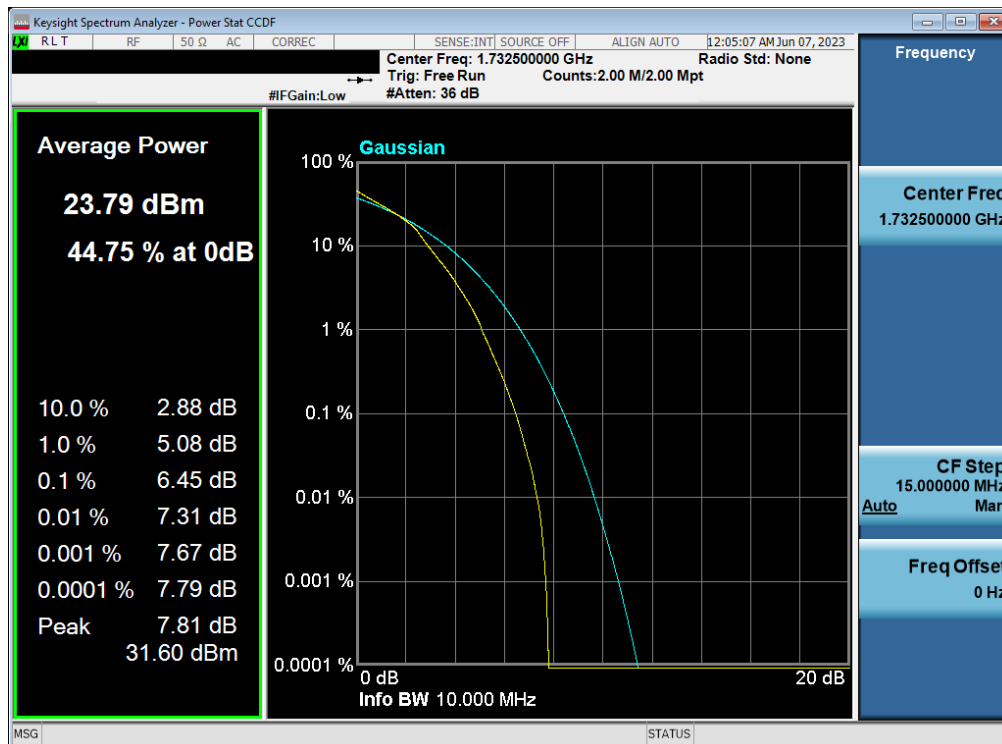


Plot 7-147. PAR Plot (LTE Band 4 - 10MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	element PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 95 of 120

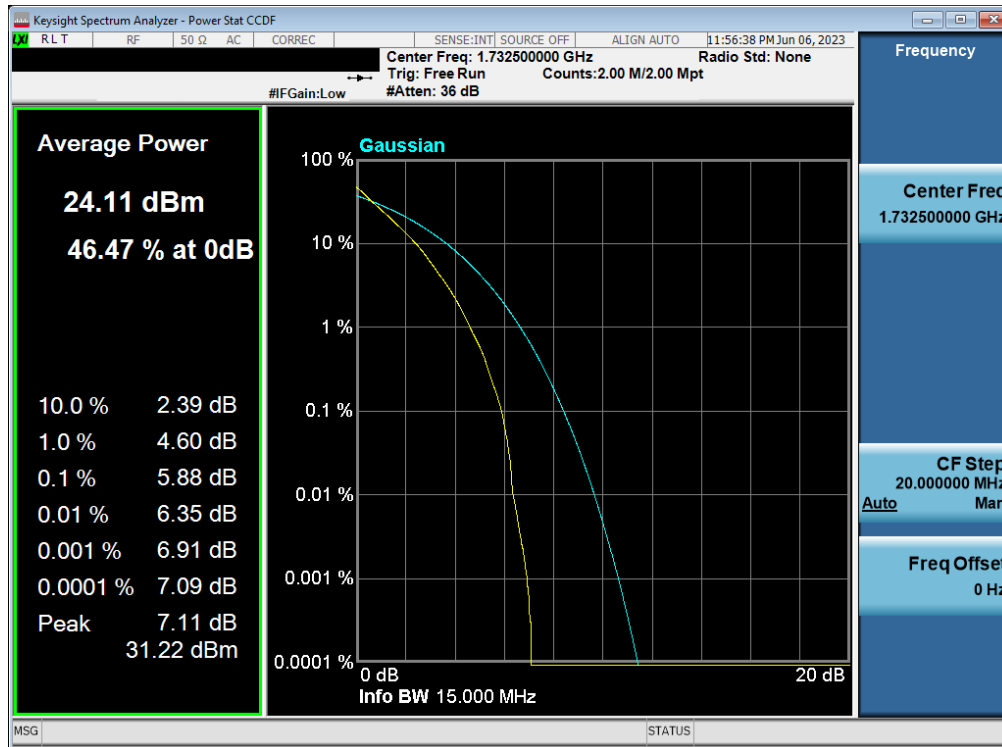


Plot 7-148. PAR Plot (LTE Band 4 - 15MHz QPSK - Full RB)

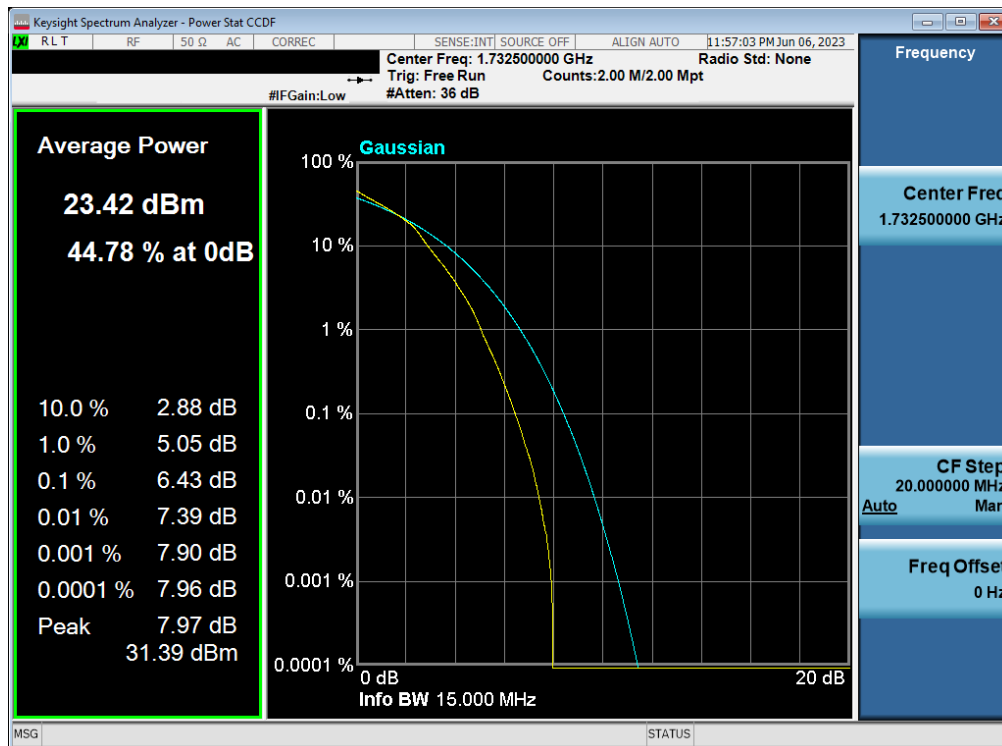


Plot 7-149. PAR Plot (LTE Band 4 - 15MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	element PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 96 of 120

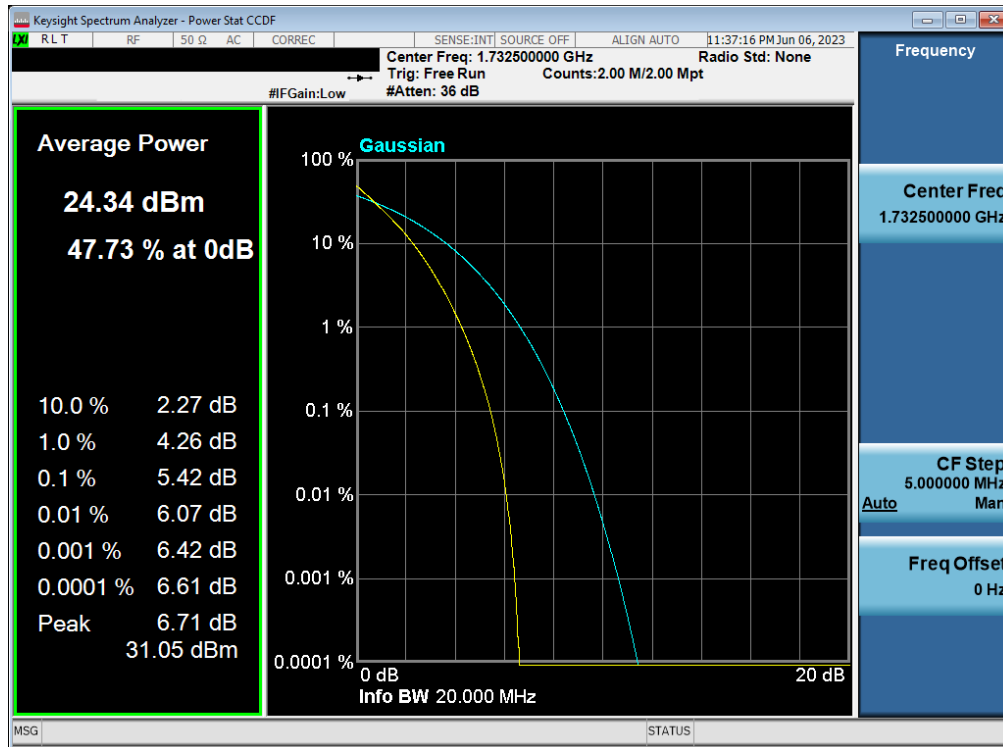

Plot 7-150. PAR Plot (LTE Band 4 - 20MHz QPSK - Full RB)

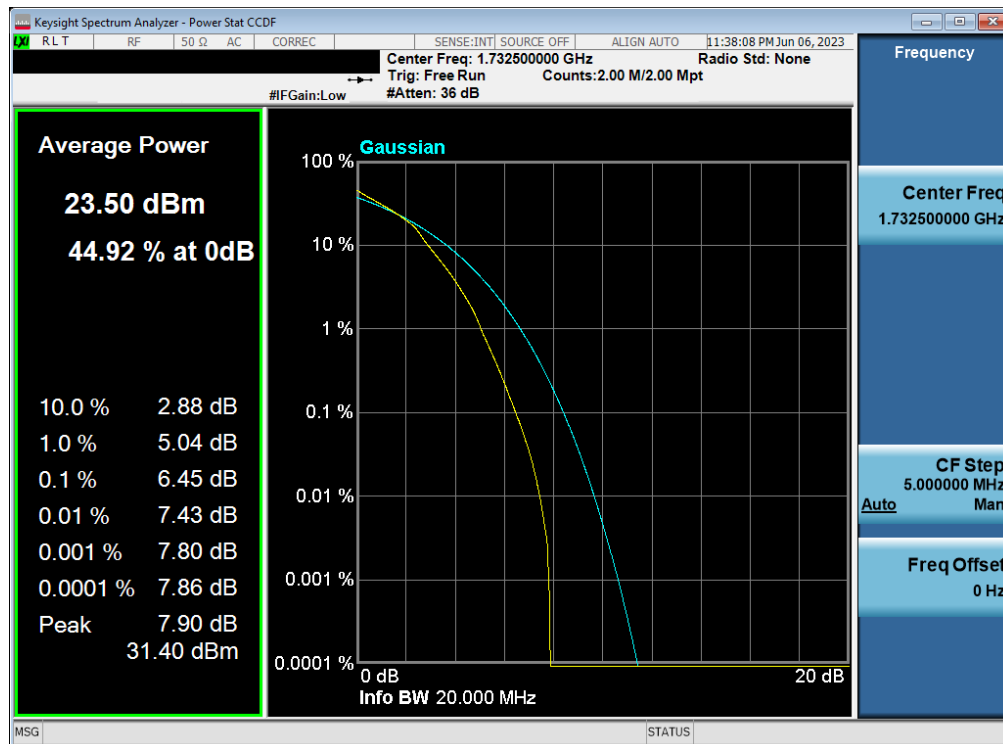


Plot 7-151. PAR Plot (LTE Band 4 - 20MHz 16-QAM - Full RB)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 97 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

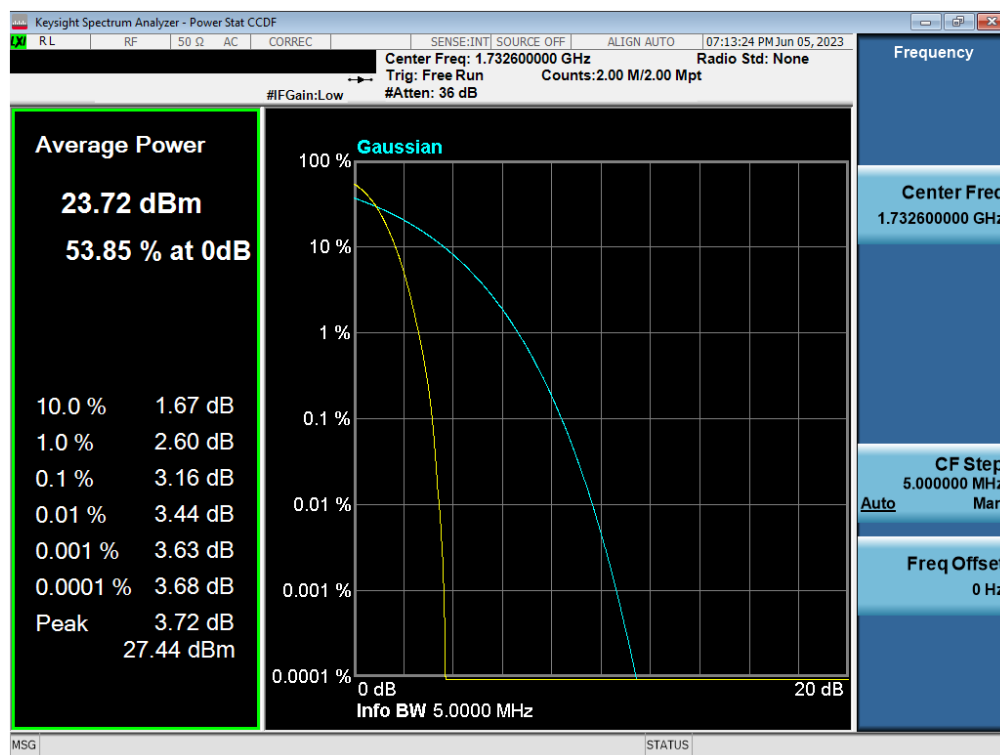

Plot 7-152. PAR Plot (WCDMA, Ch. 1413)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 98 of 120

7.6 Radiated Power (ERP/EIRP)

§27.50(b)(10), §27.50(c)(10), §27.50(d)(4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015 – Section 5.2.5.5

Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = Effective or Equivalent Isotropic Radiated Power, respectively (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. ERP/EIRP Measurement Setup

FCC ID: BCG-A2984		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 99 of 120

V2.1 11/9/2021

Test Notes

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.
3. The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
4. This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
5. The Ant. Gains (GT) are listed in dBi.

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 100 of 120

V2.1 11/9/2021

7.6.1 Antenna FCM - EIRP

Antenna FCM LTE Band 66

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1710.7	-13.20	1 / 3	24.50	11.30	13.490	30.00	-18.70
		1745.0	-13.20	1 / 3	24.26	11.06	12.764	30.00	-18.94
		1779.3	-13.20	1 / 3	24.47	11.27	13.397	30.00	-18.73
	16-QAM	1779.3	-13.20	1 / 5	23.86	10.66	11.641	30.00	-19.34
3 MHz	QPSK	1711.5	-13.20	1 / 7	24.50	11.30	13.490	30.00	-18.70
		1745.0	-13.20	1 / 0	24.40	11.20	13.183	30.00	-18.80
		1778.5	-13.20	1 / 0	24.20	11.00	12.589	30.00	-19.00
	16-QAM	1778.5	-13.20	1 / 0	24.01	10.81	12.050	30.00	-19.19
5 MHz	QPSK	1712.5	-13.20	1 / 12	24.50	11.30	13.490	30.00	-18.70
		1745.0	-13.20	1 / 12	24.50	11.30	13.490	30.00	-18.70
		1777.5	-13.20	1 / 0	24.49	11.29	13.459	30.00	-18.71
	16-QAM	1712.5	-13.20	1 / 0	23.97	10.77	11.940	30.00	-19.23
10 MHz	QPSK	1715.0	-13.20	1 / 25	24.50	11.30	13.490	30.00	-18.70
		1745.0	-13.20	1 / 25	24.45	11.25	13.335	30.00	-18.75
		1775.0	-13.20	1 / 49	24.30	11.10	12.882	30.00	-18.90
	16-QAM	1715.0	-13.20	1 / 25	23.92	10.72	11.803	30.00	-19.28
15 MHz	QPSK	1717.5	-13.20	1 / 37	24.50	11.30	13.490	30.00	-18.70
		1745.0	-13.20	1 / 74	24.50	11.30	13.490	30.00	-18.70
		1772.5	-13.20	1 / 0	24.32	11.12	12.942	30.00	-18.88
	16-QAM	1772.5	-13.20	1 / 74	24.00	10.80	12.023	30.00	-19.20
20 MHz	QPSK	1720.0	-13.20	1 / 50	24.50	11.30	13.490	30.00	-18.70
		1745.0	-13.20	1 / 0	24.33	11.13	12.972	30.00	-18.87
		1770.0	-13.20	1 / 0	24.50	11.30	13.490	30.00	-18.70
	16-QAM	1770.0	-13.20	1 / 0	23.86	10.66	11.641	30.00	-19.34

Table 7-2. Antenna FCM EIRP Data (LTE Band 66)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 101 of 120

V2.1 11/9/2021

Antenna FCM LTE Band 4

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1710.7	-13.20	1 / 3	24.50	11.30	13.490	30.00	-18.70
		1732.5	-13.20	1 / 3	24.25	11.05	12.735	30.00	-18.95
		1754.3	-13.20	1 / 5	24.48	11.28	13.428	30.00	-18.72
	16-QAM	1732.5	-13.20	1 / 0	23.93	10.73	11.830	30.00	-19.27
3 MHz	QPSK	1711.5	-13.20	1 / 7	24.50	11.30	13.490	30.00	-18.70
		1732.5	-13.20	1 / 7	24.28	11.08	12.823	30.00	-18.92
		1753.5	-13.20	1 / 7	24.45	11.25	13.335	30.00	-18.75
	16-QAM	1732.5	-13.20	1 / 0	23.99	10.79	11.995	30.00	-19.21
5 MHz	QPSK	1712.5	-13.20	1 / 12	24.50	11.30	13.490	30.00	-18.70
		1732.5	-13.20	1 / 12	24.34	11.14	13.002	30.00	-18.86
		1752.5	-13.20	1 / 0	24.49	11.29	13.459	30.00	-18.71
	16-QAM	1732.5	-13.20	1 / 12	24.08	10.88	12.246	30.00	-19.12
10 MHz	QPSK	1715.0	-13.20	1 / 25	24.50	11.30	13.490	30.00	-18.70
		1732.5	-13.20	1 / 25	24.25	11.05	12.735	30.00	-18.95
		1750.0	-13.20	1 / 0	24.50	11.30	13.490	30.00	-18.70
	16-QAM	1732.5	-13.20	1 / 0	24.07	10.87	12.218	30.00	-19.13
15 MHz	QPSK	1717.5	-13.20	1 / 37	24.50	11.30	13.490	30.00	-18.70
		1732.5	-13.20	1 / 0	24.29	11.09	12.853	30.00	-18.91
		1747.5	-13.20	1 / 37	24.16	10.96	12.474	30.00	-19.04
	16-QAM	1732.5	-13.20	1 / 37	24.03	10.83	12.106	30.00	-19.17
20 MHz	QPSK	1720.0	-13.20	1 / 50	24.50	11.30	13.490	30.00	-18.70
		1732.5	-13.20	1 / 99	24.36	11.16	13.062	30.00	-18.84
		1745.0	-13.20	1 / 0	24.25	11.05	12.735	30.00	-18.95
	16-QAM	1720.0	-13.20	1 / 0	24.03	10.83	12.106	30.00	-19.17

Table 7-3. Antenna FCM EIRP Data (LTE Band 4)

Antenna FCM WCDMA AWS

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	23.67	-13.20	10.47	11.143	30.00	-19.53
1732.60	WCDMA1700	23.87	-13.20	10.67	11.668	30.00	-19.33
1752.60	WCDMA1700	23.65	-13.20	10.45	11.092	30.00	-19.55

Table 7-4. Antenna FCM EIRP Data (WCDMA AWS)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 102 of 120

V2.1 11/9/2021

7.6.2 Antenna BCM – ERP/EIRP

Antenna BCM LTE Band 12

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	699.7	-32.10	1 / 3	25.46	-8.79	0.132	34.77	-43.56	-6.64	0.217	36.99	-43.63
		707.5	-32.10	1 / 5	25.40	-8.85	0.130	34.77	-43.62	-6.70	0.214	36.99	-43.69
		715.3	-32.10	1 / 3	25.50	-8.75	0.133	34.77	-43.52	-6.60	0.219	36.99	-43.59
	16-QAM	699.7	-32.10	1 / 0	24.77	-9.48	0.113	34.77	-44.25	-7.33	0.185	36.99	-44.32
3 MHz	QPSK	700.5	-32.10	1 / 0	25.49	-8.76	0.133	34.77	-43.53	-6.61	0.218	36.99	-43.60
		707.5	-32.10	1 / 14	25.50	-8.75	0.133	34.77	-43.52	-6.60	0.219	36.99	-43.59
		714.5	-32.10	1 / 0	25.44	-8.81	0.132	34.77	-43.58	-6.66	0.216	36.99	-43.65
	16-QAM	700.5	-32.10	1 / 0	24.81	-9.44	0.114	34.77	-44.21	-7.29	0.187	36.99	-44.28
5 MHz	QPSK	701.5	-32.10	1 / 12	25.50	-8.75	0.133	34.77	-43.52	-6.60	0.219	36.99	-43.59
		707.5	-32.10	1 / 24	25.31	-8.94	0.128	34.77	-43.71	-6.79	0.209	36.99	-43.78
		713.5	-32.10	1 / 0	25.16	-9.09	0.123	34.77	-43.86	-6.94	0.202	36.99	-43.93
	16-QAM	701.5	-32.10	1 / 0	24.90	-9.35	0.116	34.77	-44.12	-7.20	0.191	36.99	-44.19
10 MHz	QPSK	704.0	-32.10	1 / 25	25.45	-8.80	0.132	34.77	-43.57	-6.65	0.216	36.99	-43.64
		707.5	-32.10	1 / 49	25.50	-8.75	0.133	34.77	-43.52	-6.60	0.219	36.99	-43.59
		711.0	-32.10	1 / 0	25.25	-9.00	0.126	34.77	-43.77	-6.85	0.207	36.99	-43.84
	16-QAM	704.0	-32.10	1 / 49	24.89	-9.36	0.116	34.77	-44.13	-7.21	0.190	36.99	-44.20

Table 7-5. Antenna BCM ERP/EIRP Data (LTE Band 12)

Antenna BCM LTE Band 17

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [mW]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
5 MHz	QPSK	706.5	-32.10	1 / 24	25.49	-8.76	0.133	34.77	-43.53	-6.61	0.218	36.99	-43.60
		710.0	-32.10	1 / 24	25.50	-8.75	0.133	34.77	-43.52	-6.60	0.219	36.99	-43.59
		713.5	-32.10	1 / 24	25.50	-8.75	0.133	34.77	-43.52	-6.60	0.219	36.99	-43.59
	16-QAM	710.0	-32.10	1 / 24	24.80	-9.45	0.114	34.77	-44.22	-7.30	0.186	36.99	-44.29
10 MHz	QPSK	709.0	-32.10	1 / 49	25.47	-8.78	0.132	34.77	-43.55	-6.63	0.217	36.99	-43.62
		710.0	-32.10	1 / 49	25.50	-8.75	0.133	34.77	-43.52	-6.60	0.219	36.99	-43.59
		711.0	-32.10	1 / 0	25.31	-8.94	0.128	34.77	-43.71	-6.79	0.209	36.99	-43.78
	16-QAM	709.0	-32.10	1 / 49	24.87	-9.38	0.115	34.77	-44.15	-7.23	0.189	36.99	-44.22

Table 7-6. Antenna BCM ERP/EIRP Data (LTE Band 17)

Antenna BCM LTE Band 13

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [mW]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
5 MHz	QPSK	779.5	-28.50	1 / 12	25.50	-5.15	0.305	34.77	-39.92	-3.00	0.501	36.99	-39.99
		782.0	-28.50	1 / 0	25.50	-5.15	0.305	34.77	-39.92	-3.00	0.501	36.99	-39.99
		784.5	-28.50	1 / 12	25.26	-5.39	0.289	34.77	-40.16	-3.24	0.474	36.99	-40.23
	16-QAM	782.0	-28.50	1 / 0	24.95	-5.70	0.269	34.77	-40.47	-3.55	0.442	36.99	-40.54
10 MHz	QPSK	782.0	-28.50	1 / 49	25.35	-5.30	0.000	34.77	-40.07	-3.15	0.484	36.99	-40.14
	16-QAM	782.0	-28.50	1 / 0	24.96	-5.69	0.000	34.77	-40.46	-3.54	0.443	36.99	-40.53

Table 7-7. Antenna BCM ERP/EIRP Data (LTE Band 13)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 103 of 120

V2.1 11/9/2021

7.7 Radiated Spurious Emissions

§2.1053, §27.53(f)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26 2015, TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch
		Page 104 of 120

V2.1 11/9/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

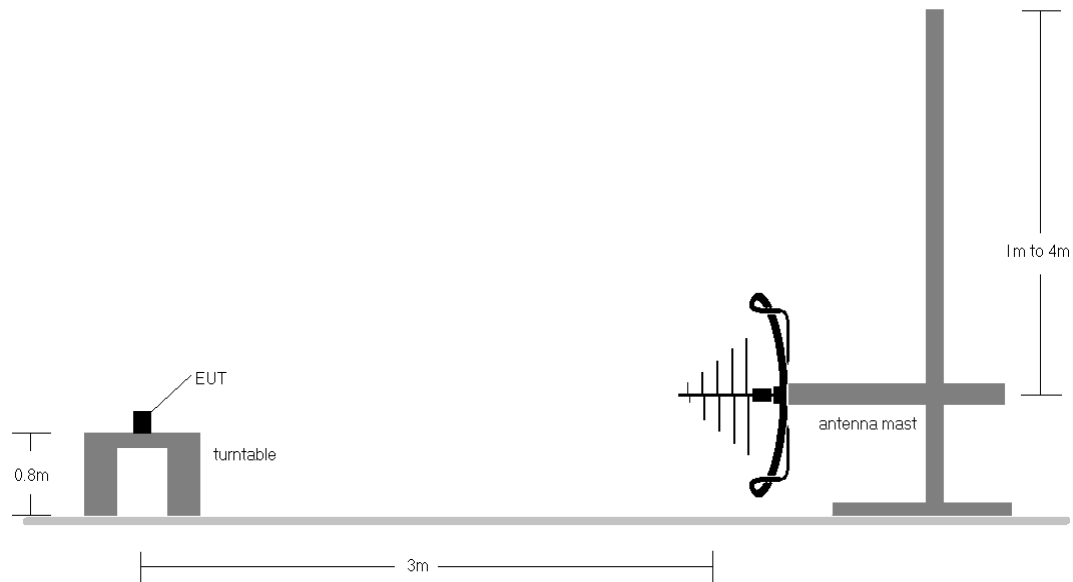


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

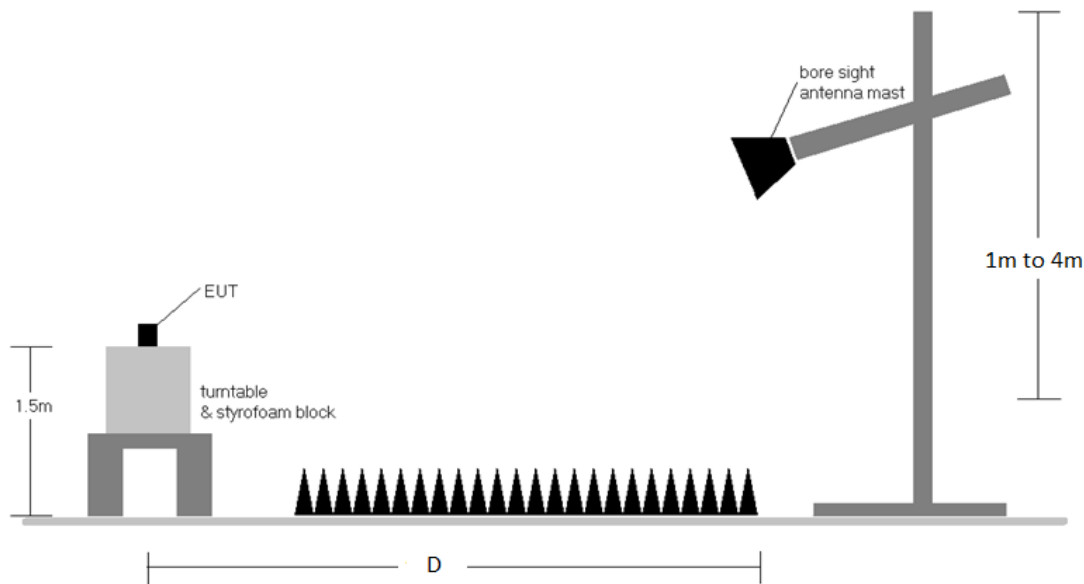


Figure 7-7. Test Instrument & Measurement Setup > 1GHz

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 105 of 120

V2.1 11/9/2021

Test Notes


1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a. $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b. $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
5. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
7. This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 106 of 120

V2.1 11/9/2021

7.7.1 Radiated Spurious Emission Measurement

Antenna FCM LTE Band 66/4

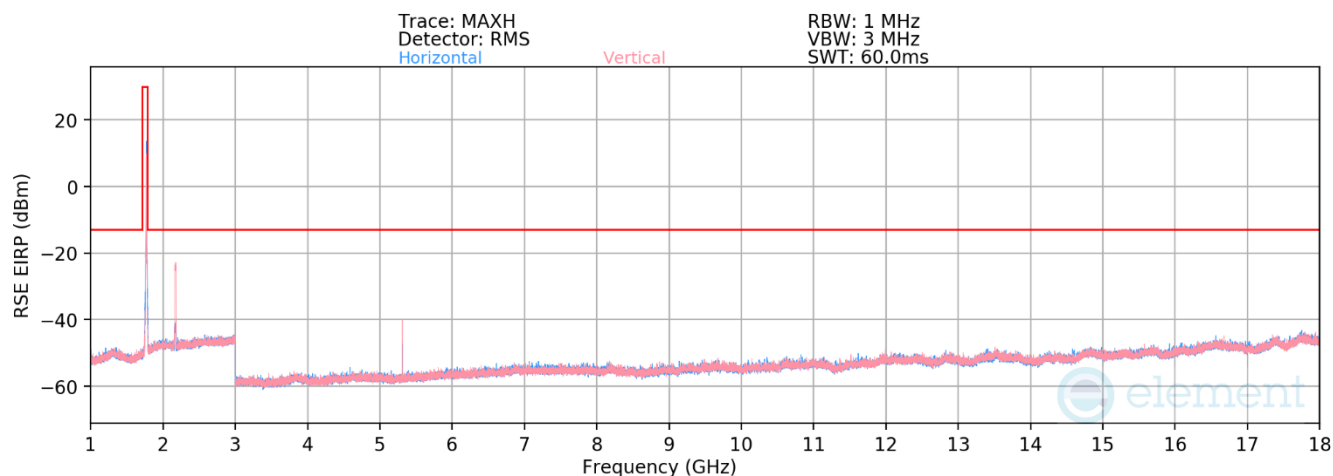

Plot 7-153. Antenna FCM Radiated Spurious Emission above 1GHz (LTE Band 66/4)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch
		Page 107 of 120

V2.1 11/9/2021

Bandwidth (MHz):	20
Frequency (MHz):	1720.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3440.0	V	-	-	-78.99	2.54	30.55	-64.70	-13.00	-51.70
5160.0	V	347	159	-73.95	5.38	38.43	-56.83	-13.00	-43.83
6880.0	V	-	-	-81.95	8.58	33.63	-61.63	-13.00	-48.63
8600.0	V	-	-	-80.52	8.81	35.29	-59.97	-13.00	-46.97

Table 7-8. Antenna FCM Radiated Spurious Data (LTE Band 66/4 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1745.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3490.0	V	102	187	-79.22	3.19	30.97	-64.29	-13.00	-51.29
5235.0	V	347	163	-69.34	6.70	44.36	-50.90	-13.00	-37.90
6980.0	V	-	-	-84.47	9.85	32.38	-62.88	-13.00	-49.88
8725.0	V	-	-	-84.02	11.03	34.01	-61.24	-13.00	-48.24

Table 7-9. Antenna FCM Radiated Spurious Data (LTE Band 66/4 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1770.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3540.0	H	-	-	-68.17	2.85	41.68	-53.58	-13.00	-40.58
5310.0	V	312	161	-51.93	5.96	61.03	-34.23	-13.00	-21.23
7080.0	V	-	-	-71.71	8.40	43.69	-51.57	-13.00	-38.57
8850.0	V	-	-	-72.48	9.24	43.76	-51.49	-13.00	-38.49



Table 7-10. Antenna FCM Radiated Spurious Data (LTE Band 66/4 – High Channel)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 108 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Antenna BCM LTE Band 12/17

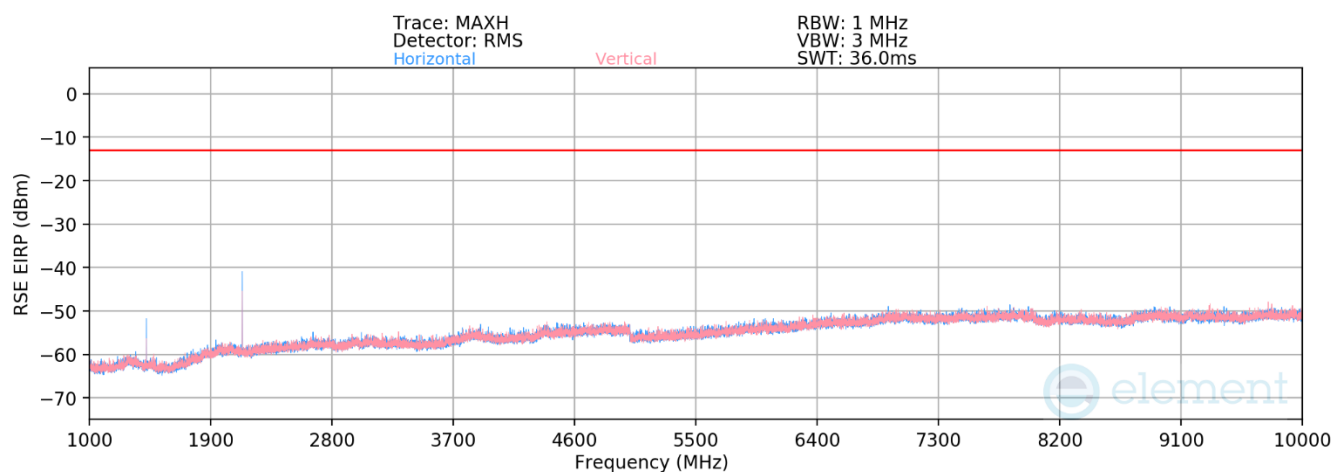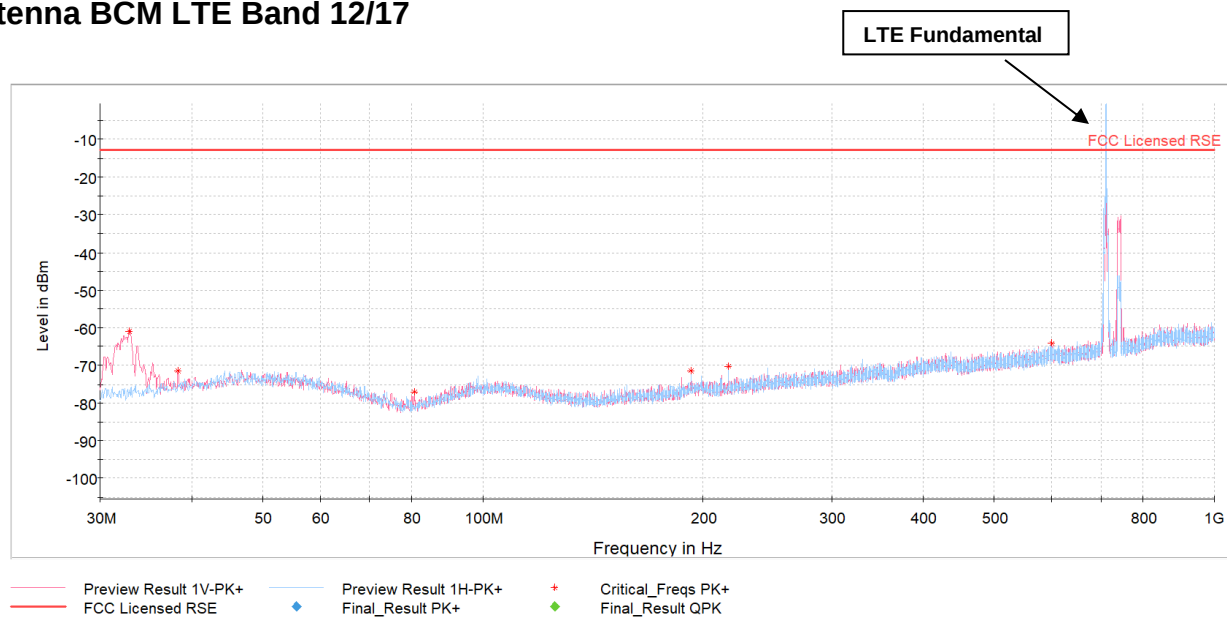

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 109 of 120

V2.1 11/9/2021

Bandwidth (MHz):	10
Frequency (MHz):	704.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1408.0	H	250	155	-69.46	-4.85	32.69	-62.57	-13.00	-49.57
2112.0	H	222	153	-63.84	-1.28	41.88	-53.38	-13.00	-40.38
2816.0	H	-	-	-77.61	0.19	29.58	-65.68	-13.00	-52.68
3520.0	H	-	-	-78.43	1.78	30.35	-64.91	-13.00	-51.91

Table 7-11. Antenna BCM Radiated Spurious Data (LTE Band 12/17 – Low Channel)

Bandwidth (MHz):	10
Frequency (MHz):	707.5
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1415.0	H	292	161	-69.14	-4.86	33.00	-62.25	-13.00	-49.25
2122.5	H	146	228	-62.96	-1.37	42.67	-52.58	-13.00	-39.58
2830.0	H	-	-	-77.61	0.17	29.56	-65.70	-13.00	-52.70
3537.5	H	-	-	-78.50	1.77	30.27	-64.99	-13.00	-51.99

Table 7-12. Antenna BCM Radiated Spurious Data (LTE Band 12/17 – Mid Channel)

Bandwidth (MHz):	10
Frequency (MHz):	711.0
RB / Offset:	1 / 25


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1422.0	H	144	109	-67.27	-4.87	34.86	-60.39	-13.00	-47.39
2133.0	H	172	102	-60.92	-1.42	44.66	-50.60	-13.00	-37.60
2844.0	H	-	-	-77.69	0.19	29.50	-65.76	-13.00	-52.76
3555.0	H	-	-	-78.35	1.74	30.39	-64.87	-13.00	-51.87

Table 7-13. Antenna BCM Radiated Spurious Data (LTE Band 12/17 – High Channel)


FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 110 of 120

V2.1 11/9/2021

Antenna BCM LTE Band 13

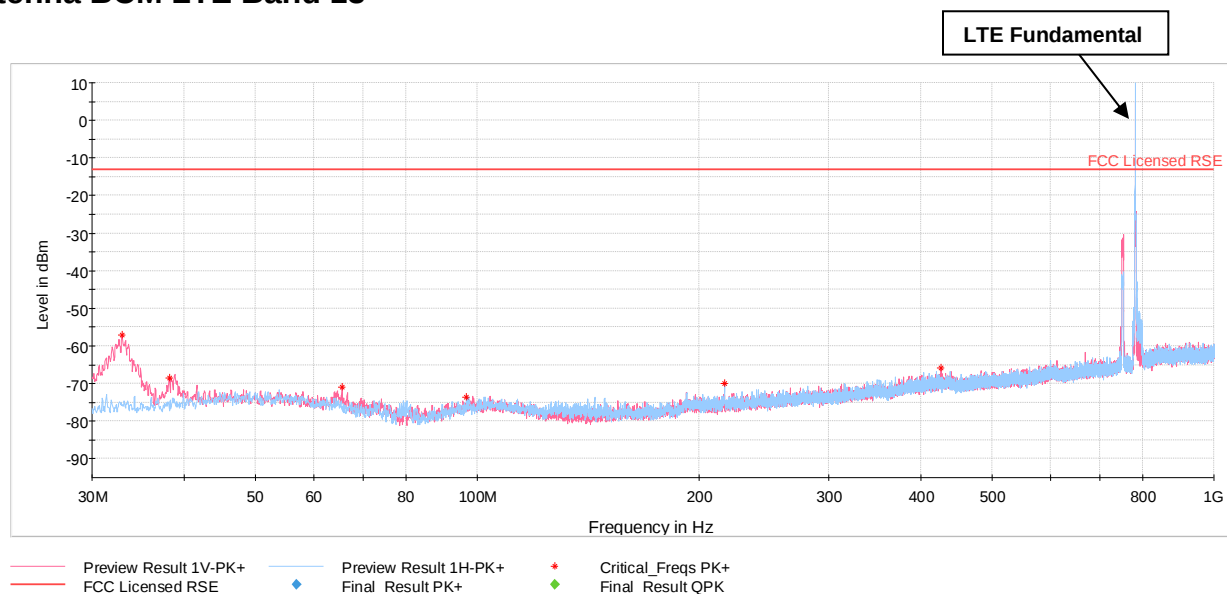

Plot 7-156. Antenna BCM Radiated Spurious Emission below 1GHz (LTE Band 13)

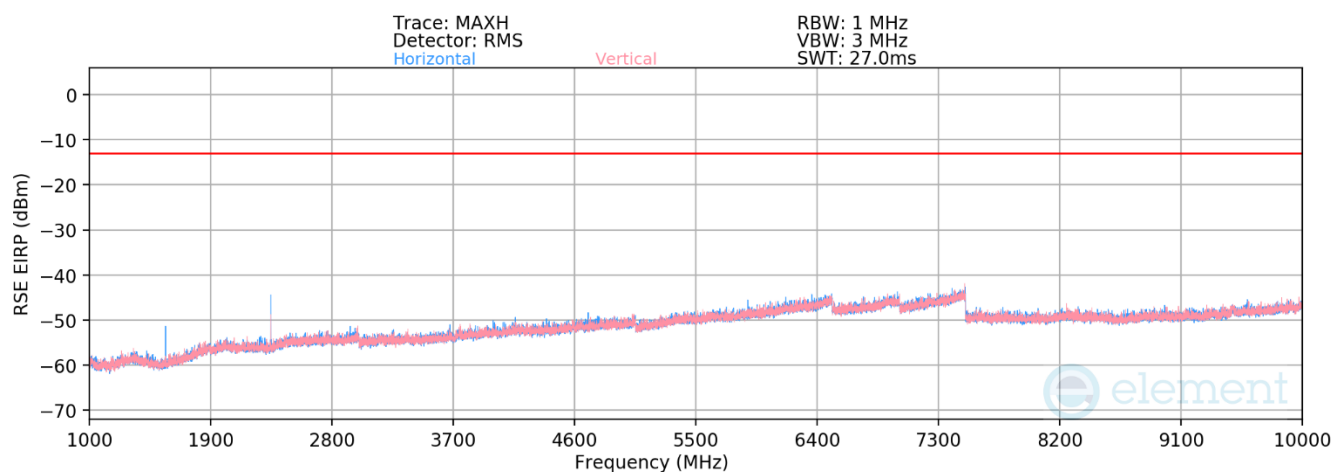

Plot 7-157. Antenna BCM Radiated Spurious Emission above 1GHz (LTE Band 13)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch
		Page 111 of 120

V2.1 11/9/2021

Bandwidth (MHz):	5
Frequency (MHz):	779.5
RB / Offset:	1/12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1559.0	H	211	330	-72.99	-1.63	32.38	-62.87	-40.00	-22.87
2338.5	H	187	185	-74.19	1.66	34.47	-60.79	-13.00	-47.79
3118.0	H	-	-	-79.23	3.69	31.46	-63.80	-13.00	-50.80
3897.5	H	-	-	-79.80	5.03	32.23	-63.03	-13.00	-50.03

Table 7-14. Antenna BCM Radiated Spurious Data (LTE Band 13 – Low Channel)

Bandwidth (MHz):	5
Frequency (MHz):	782.0
RB / Offset:	1/12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1564.0	H	133	231	-72.78	-1.63	32.59	-62.66	-40.00	-22.66
2346.0	H	300	15	-71.76	1.66	36.90	-58.36	-13.00	-45.36
3128.0	H	-	-	-79.81	3.69	30.88	-64.38	-13.00	-51.38
3910.0	H	-	-	-80.38	5.03	31.65	-63.61	-13.00	-50.61

Table 7-15. Antenna BCM Radiated Spurious Data (LTE Band 13 – Mid Channel)

Bandwidth (MHz):	5
Frequency (MHz):	784.5
RB / Offset:	1/12


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1569.0	H	252	306	-73.52	-1.63	31.85	-63.40	-40.00	-23.40
2353.5	H	295	20	-70.50	1.66	38.16	-57.10	-13.00	-44.10
3138.0	H	-	-	-79.93	3.69	30.76	-64.50	-13.00	-51.50
3922.5	H	-	-	-80.62	5.03	31.41	-63.85	-13.00	-50.85

Table 7-16. Antenna BCM Radiated Spurious Data (LTE Band 13 – High Channel)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 112 of 120

V2.1 11/9/2021

Antenna FCM WCDMA AWS

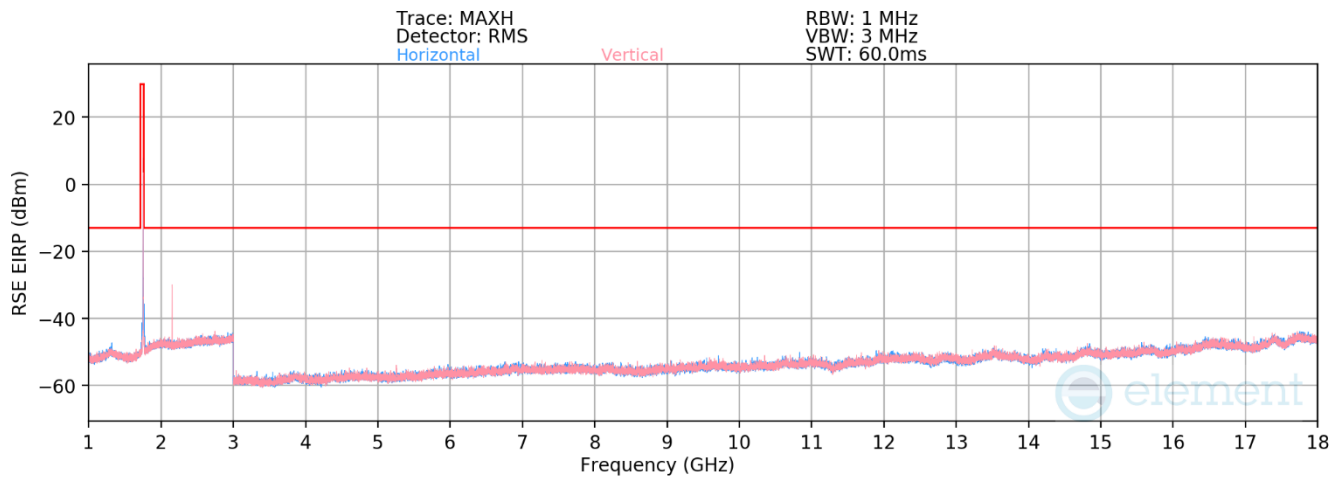

Plot 7-158. Antenna FCM Radiated Spurious Emission above 1GHz (WCDMA AWS)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 113 of 120

V2.1 11/9/2021

Mode:	WCDMA RMC
Channel:	1312
Frequency (MHz):	1712.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3424.8	-	-	-	-77.19	1.64	31.45	-63.81	-13.00	-50.81
5137.2	-	-	-	-79.66	4.87	32.21	-63.05	-13.00	-50.05

7-17. Antenna FCM Radiated Spurious Data (WCDMA AWS – Low Channel)

Mode:	WCDMA RMC
Channel:	1413
Frequency (MHz):	1732.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3465.2	V	102	181	-75.41	1.59	33.18	-62.08	-13.00	-49.08
5197.8	V	326	172	-70.36	4.71	41.35	-53.91	-13.00	-40.91
6930.4	V	-	-	-81.52	8.76	34.24	-61.02	-13.00	-48.02
8663.0	V	-	-	-82.00	8.97	33.97	-61.28	-13.00	-48.28

Table 7-18. Antenna FCM Radiated Spurious Data (WCDMA AWS – Mid Channel)

Mode:	WCDMA RMC
Channel:	1513
Frequency (MHz):	1752.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3505.2	-	-	-	-77.65	1.74	31.09	-64.16	-13.00	-51.16
5257.8	-	312	162	-75.30	4.88	36.58	-58.68	-13.00	-45.68
7010.4	-	-	-	-81.21	8.28	34.07	-61.19	-13.00	-48.19
8763.0	-	-	-	-82.07	9.63	34.56	-60.70	-13.00	-47.70

Table 7-19. Antenna FCM Radiated Spurious Data (WCDMA AWS – High Channel)

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch
		Page 114 of 120

V2.1 11/9/2021

7.8 Frequency Stability / Temperature Variation

§2.1053, §27.53

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26 2015

TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

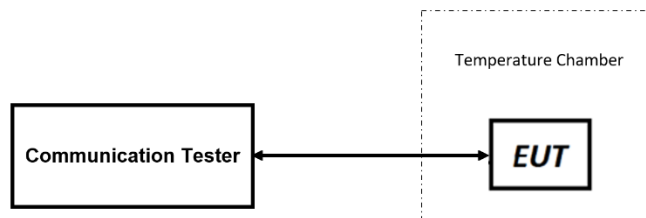


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCG-A2984		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 115 of 120

V2.1 11/9/2021

Frequency Stability / Temperature Variation

LTE Band 66/4				
Operating Band Lower Boundary (GHz)			1.710	
Ref. Voltage (VDC)			3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.711096679	-0.0010967
		- 20	1.711090315	-0.0010903
		- 10	1.710999452	-0.0009995
		0	1.711004229	-0.0010042
		+ 10	1.711022675	-0.0010227
		+ 20 (Ref)	1.711020600	-0.0010206
		+ 30	1.711054978	-0.0010550
		+ 40	1.711041852	-0.0010419
		+ 50	1.711041861	-0.0010419
Battery Endpoint	3.40	+ 20	1.711042385	-0.0010424

Table 7-20. LTE Band 66/4 Lower Boundary Frequency Stability Data

LTE Band 66/4				
Operating Band Upper Boundary (GHz)			1.780	
Ref. Voltage (VDC)			3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.778902618	-0.0010974
		- 20	1.778899315	-0.0011007
		- 10	1.778996440	-0.0010036
		0	1.779004275	-0.0009957
		+ 10	1.779050776	-0.0009492
		+ 20 (Ref)	1.779063859	-0.0009361
		+ 30	1.779069776	-0.0009302
		+ 40	1.779062001	-0.0009380
		+ 50	1.779072404	-0.0009276
Battery Endpoint	3.40	+ 20	1.779081235	-0.0009188

Table 7-21. LTE Band 66/4 Upper Boundary Frequency Stability Data

FCC ID: BCG-A2984			PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch		Page 116 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Frequency Stability / Temperature Variation

LTE Band 12/17

Operating Band Lower Boundary (GHz)		0.699		
Ref. Voltage (VDC):		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.69952	-0.6995200
		- 20	0.69952	-0.6995243
		- 10	0.69949	-0.6994860
		0	0.69950	-0.6994953
		+ 10	0.69951	-0.6995129
		+ 20 (Ref)	0.69951	-0.6995079
		+ 30	0.69949	-0.6994949
		+ 40	0.69949	-0.6994860
		+ 50	0.69949	-0.6994872
Battery Endpoint	3.40	+ 20	0.69950	-0.6994989

Table 7-22. LTE Band 12/17 Lower Boundary Frequency Stability Data

LTE Band 12/17

Operating Band Upper Boundary (GHz)		0.716		
Ref. Voltage (VDC):		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.71547	-0.7154734
		- 20	0.71547	-0.7154711
		- 10	0.71555	-0.7155531
		0	0.71555	-0.7155526
		+ 10	0.71555	-0.7155487
		+ 20 (Ref)	0.71555	-0.7155501
		+ 30	0.71555	-0.7155516
		+ 40	0.71556	-0.7155639
		+ 50	0.71556	-0.7155551
Battery Endpoint	3.40	+ 20	0.71555	-0.7155498

Table 7-23. LTE Band 12/17 Upper Boundary Frequency Stability Data

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 117 of 120

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Frequency Stability / Temperature Variation

LTE Band 13				
Operating Band Lower Boundary (GHz)			0.777	
Ref. Voltage (VDC):			3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.77727	-0.7772706
		- 20	0.77727	-0.7772717
		- 10	0.77725	-0.7772529
		0	0.77725	-0.7772536
		+ 10	0.77725	-0.7772465
		+ 20 (Ref)	0.77725	-0.7772484
		+ 30	0.77725	-0.7772508
		+ 40	0.77725	-0.7772531
		+ 50	0.77726	-0.7772556
Battery Endpoint	3.40	+ 20	0.77726	-0.7772639

Table 7-24. LTE Band 13 Lower Boundary Frequency Stability Data

LTE Band 13				
Operating Band Upper Boundary (GHz)			0.787	
Ref. Voltage (VDC):			3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.78674	-0.7867361
		- 20	0.78674	-0.7867387
		- 10	0.78676	-0.7867639
		0	0.78677	-0.7867727
		+ 10	0.78678	-0.7867785
		+ 20 (Ref)	0.78677	-0.7867666
		+ 30	0.78677	-0.7867741
		+ 40	0.78678	-0.7867783
		+ 50	0.78578	-0.7857758
Battery Endpoint	3.40	+ 20	0.78577	-0.7857725

Table 7-25. LTE Band 13 Upper Boundary Frequency Stability Data

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 118 of 120

V2.1 11/9/2021

Frequency Stability / Temperature Variation

WCDMA AWS				
Operating Band Lower Boundary (GHz)		1.710		
Ref. Voltage (VDC)		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.710376420	-0.0003764
		- 20	1.710374965	-0.0003750
		- 10	1.710381122	-0.0003811
		0	1.710374041	-0.0003740
		+ 10	1.710374154	-0.0003742
		+ 20 (Ref)	1.710374935	-0.0003749
		+ 30	1.710337395	-0.0003374
		+ 40	1.710374140	-0.0003741
		+ 50	1.710373265	-0.0003733
Battery Endpoint	3.40	+ 20	1.710385941	-0.0003859

Table 7-26. WCDMA AWS Lower Boundary Frequency Stability Data

WCDMA AWS				
Operating Band Upper Boundary (GHz)		1.755		
Ref. Voltage (VDC)		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.754633571	-0.0003664
		- 20	1.754633162	-0.0003668
		- 10	1.754637267	-0.0003627
		0	1.754639280	-0.0003607
		+ 10	1.754635310	-0.0003647
		+ 20 (Ref)	1.754638043	-0.0003620
		+ 30	1.754641152	-0.0003588
		+ 40	1.754638936	-0.0003611
		+ 50	1.754637502	-0.0003625
Battery Endpoint	3.40	+ 20	1.754639258	-0.0003607

Table 7-27. WCDMA AWS Upper Boundary Frequency Stability Data

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 119 of 120

V2.1 11/9/2021

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Watch** **FCC ID: BCG-A2984** complies with all the requirements of Part 27 of the FCC rules.

FCC ID: BCG-A2984	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2305020013-05.BCG	Test Dates: 06/07/2023 - 07/31/2023	EUT Type: Watch	Page 120 of 120

V2.1 11/9/2021