



MEASUREMENT REPORT

FCC PART 15.407 Narrowband UNII HDR

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

5/2/2023 - 8/10/2023

Test Report Issue Date:

8/25/2023

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1C2305020011-08.BCG

FCC ID:

BCG-A3048

APPLICANT:

Apple Inc.

Application Type:

Certification

Model:

A3048

EUT Type:

Wireless Earbud

Frequency Range:

5157 – 5245MHz and 5731 – 5844MHz

Modulation Type:

$\pi/4$ DQPSK

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President



FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 1 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	Element Materials Technology Test Location	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications.....	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS	13
7.1	Summary.....	13
7.2	26dB & 99% Bandwidth Measurement – HDR.....	14
7.3	6dB & 99% Bandwidth Measurement – HDR.....	22
7.4	Conducted Output Power - HDR	30
7.5	Maximum Power Spectral Density – HDR	32
7.6	Radiated Spurious Emissions – Above 1GHz	47
7.7	Radiated Spurious Emissions – Below 1GHz	64
7.8	AC Line-Conducted Emissions Measurement.....	68
8.0	CONCLUSION.....	72


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 2 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Tx Frequency (MHz)	Mode	Max. Power (mW)	Max. Power (dBm)
1	5157-5245	HDR4	7.870	8.96
		HDR8	7.925	8.99
		HDRp4	7.745	8.89
		HDRp8	7.834	8.94
3	5731-5844	HDR4	9.817	9.92
		HDR8	9.727	9.88
		HDRp4	9.750	9.89
		HDRp8	9.683	9.86

EUT Overview

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 3 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs)

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 4 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Wireless Left Earbud FCC ID: BCG-A3048**. The test data contained in this report pertains only to the emissions due to the EUT's Narrowband UNII HDR transmitter.

- This Narrowband UNII module has been tested by manufacturer and the following were confirmed:
 - A) The hopping sequence is pseudorandom
 - B) 79 channels can be used at a time for hopping
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
 - E) Narrowband UNII can only hop within the same UNII band and cannot hop between bands

Test Device Serial No.: GX1KJ4EG26JY, GX1KJ41026JY, GX1KJ3WN26JY, GX1KJ5AT26JY

2.2 Device Capabilities

This device contains the following capabilities:

Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8, HDRp4, HDRp8), NB UNII (1x, LE2M, HDR4, HDR8, HDRp4, HDRp8)

Band 1	Band 3
Frequency (MHz)	Frequency (MHz)
5157	5731
:	:
5201	5788
:	:
5245	5844

Table 2-1. Narrowband UNII HDR Frequency of Operations

Notes:

This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the U-NII Band 1 & U-NII Band 3. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 V02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 5 of 72

V 10.5 12/15/2021

Measured Duty Cycles		
Mode	Frequency (MHz)	Duty Cycle [%]
HDR4	5157-5245	77.9
	5731-5844	77.9
HDR8	5157-5245	78.3
	5731-5844	78.3
HDRp4	5157-5245	87.1
	5731-5844	87.1
HDRp8	5157-5245	88.1
	5731-5844	88.1

Table 2-2. Measured Duty Cycles

1. Additionally, this device is sold together in the same package as a system with FCC ID: BCG-A3047 & FCC ID: BCG-A2968. Co-Tx configurations were tested and the worst case has been included in the RF BTLE Report.

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)
5.157 – 5.245	-2.12
5.731 – 5.844	-2.55

Table 2-3. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: C02DV7VKMD6T S/N: N/A
2	Apple Airpod Charging Case Apple Airpod (Right)	Model: A2968 Model: A3047	S/N: W1G9FWQMLX S/N: GFJKJ17326K0
3	Apple USB-C Cable	Model: Spartan	S/N: 000MKTR02U
4	USB-C Cable w/ AC Adapter	Model: A146 Model: A2305	S/N: N/A S/N: N/A

Table 2-4. Test Support Equipment List

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 6 of 72

V 10.5 12/15/2021

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

The EUT was also investigated with and without charging case.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated,

- EUT charged by charging case and powered by AC/DC adaptor with USB-C cable.
- EUT charged by charging case and powered by host PC with USB-C cable.

2.6 Software and Firmware

The test was conducted with firmware version 5A92420m installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 7 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 8 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 9 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 10 of 72

V 10.5 12/15/2021

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.77
Line Conducted Disturbance	2.70
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz - 1GHz)	4.75
Radiated Disturbance (1 - 18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 11 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial #
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
Anritsu	ML2496A	Power Meter	10/17/2022	Annual	10/17/2023	2002005
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18 GHz)	3/7/2023	Annual	3/7/2024	00227949
Keysight Technologies	N9030A	PXA Signal Analyzer	12/9/2022	Annual	12/9/2023	MY55330128
Keysight Technologies	N9040B	UXA Spectrum Analyzer	7/10/2023	Annual	7/10/2024	US57212289
Rohde & Schwarz	180-442A-KF	Horn (Small)	3/6/2023	Annual	3/6/2024	T058701-2
Rohde & Schwarz	ENV216	Two-Line V-Network	3/30/2023	Annual	3/30/2024	101364
Rohde & Schwarz	FSVA3030	Signal Analyzer 30GHz	11/30/2022	Annual	11/30/2023	100832
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	4/21/2022	Annual	4/21/2023	101366
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TS-PR1	Preamplifier - Antenna System; 30MHz - 1GHz	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR18	Pre Amplifier 1-18GHz	3/3/2023	Annual	3/3/2024	102130
Rohde & Schwarz	TS-PR1840	Pre Amplifier 18-40GHz	6/2/2023	Annual	6/2/2024	100050
Schwarzbeck	VULB9162	Broadband Trilog Antenna	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 12 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A3048
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407	26dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
2.1049	Occupied Bandwidth	N/A		PASS	Section 7.2, Section 7.3
15.407 (a.1.iv), (a.3)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a)		PASS	Section 7.4
15.407 (a.1.iv), (a.3)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a)		PASS	Section 7.5
15.407(b.1), (b.4)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b)	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (b.4)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.6, 7.7
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 7.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 2.0.0.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 13 of 72

V 10.5 12/15/2021

7.2 26dB & 99% Bandwidth Measurement – HDR

§2.1049; §15.407

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 14 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Mode	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5157	HDR4	2.2678	2.6360
	5201	HDR4	2.2457	2.5510
	5245	HDR4	2.2765	2.5610
	5157	HDR8	4.4590	5.0290
	5201	HDR8	4.4800	5.0330
	5245	HDR8	4.5634	5.0650
	5157	HDRp4	2.4306	2.7360
	5201	HDRp4	2.4112	2.7210
	5245	HDRp4	2.4336	2.7270
	5157	HDRp8	4.8510	5.4190
	5201	HDRp8	4.8347	5.4160
	5245	HDRp8	4.8474	5.4260


Table 7-2. Conducted BW Measurements

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 15 of 72

V 10.5 12/15/2021

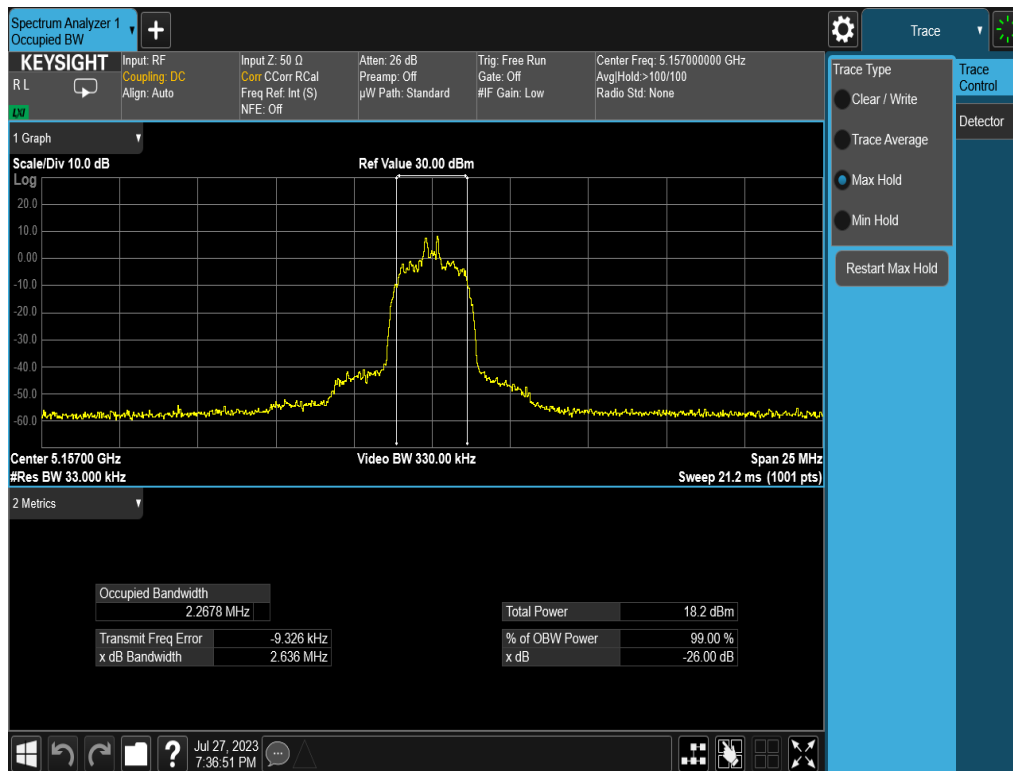

Plot 7-1. 26dB BW & 99% OBW (HDR4, 5157MHz)


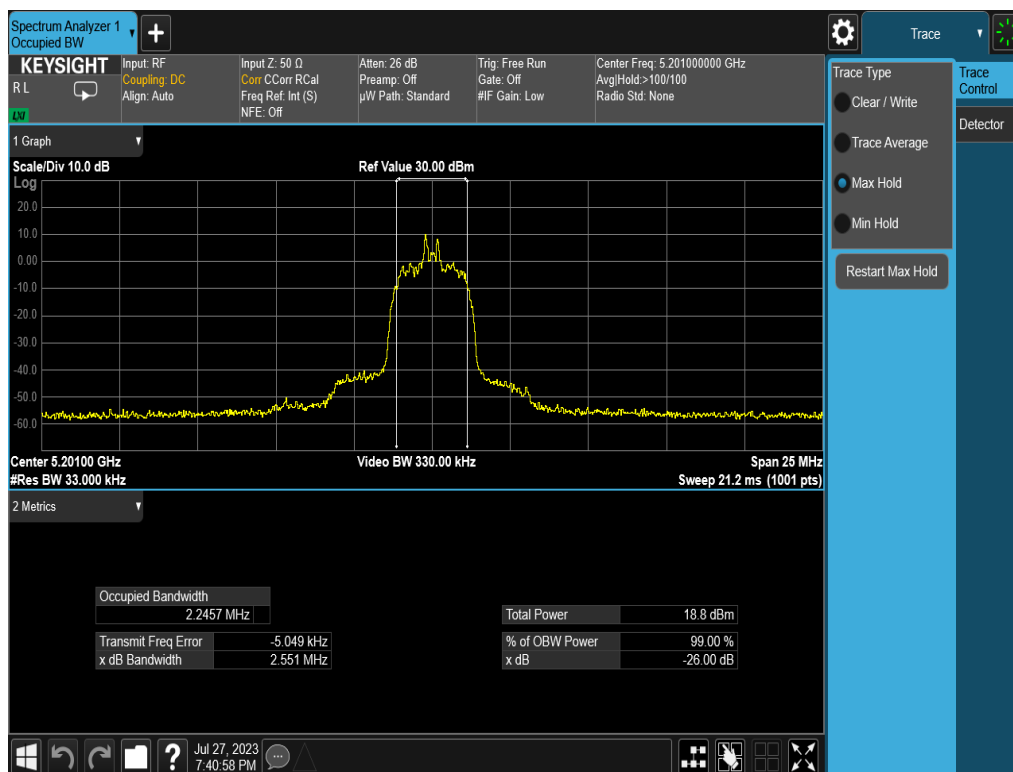


Plot 7-2. 26dB BW & 99% OBW (HDR4, 5201MHz)

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 16 of 72

V 10.5 12/15/2021



Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

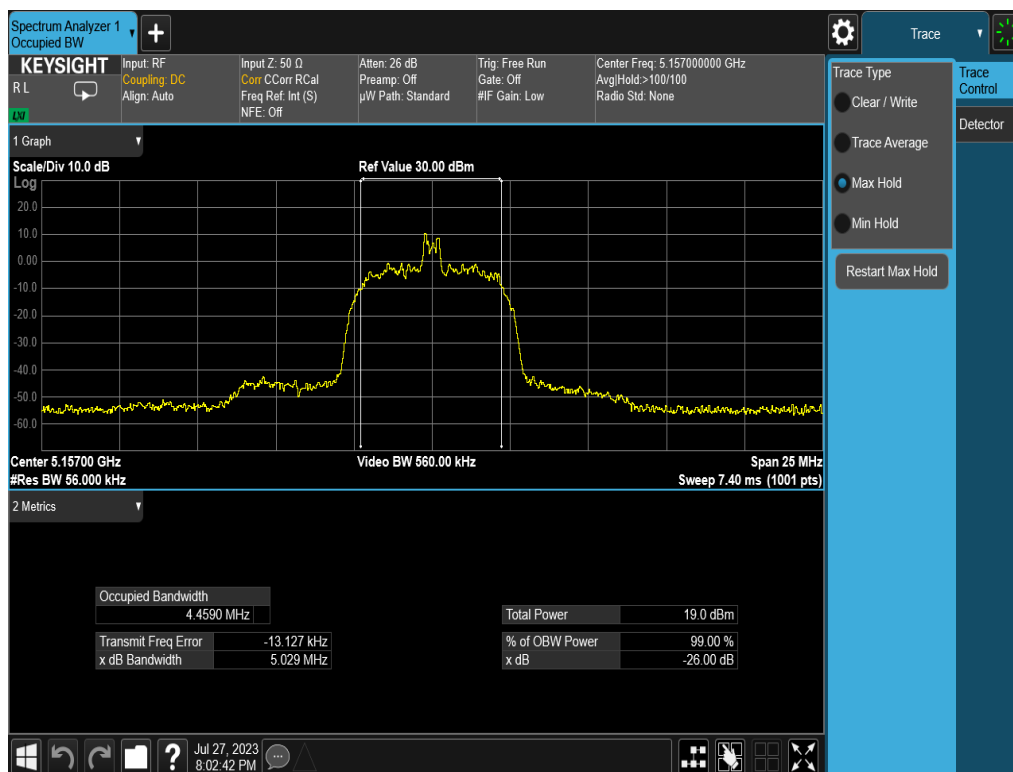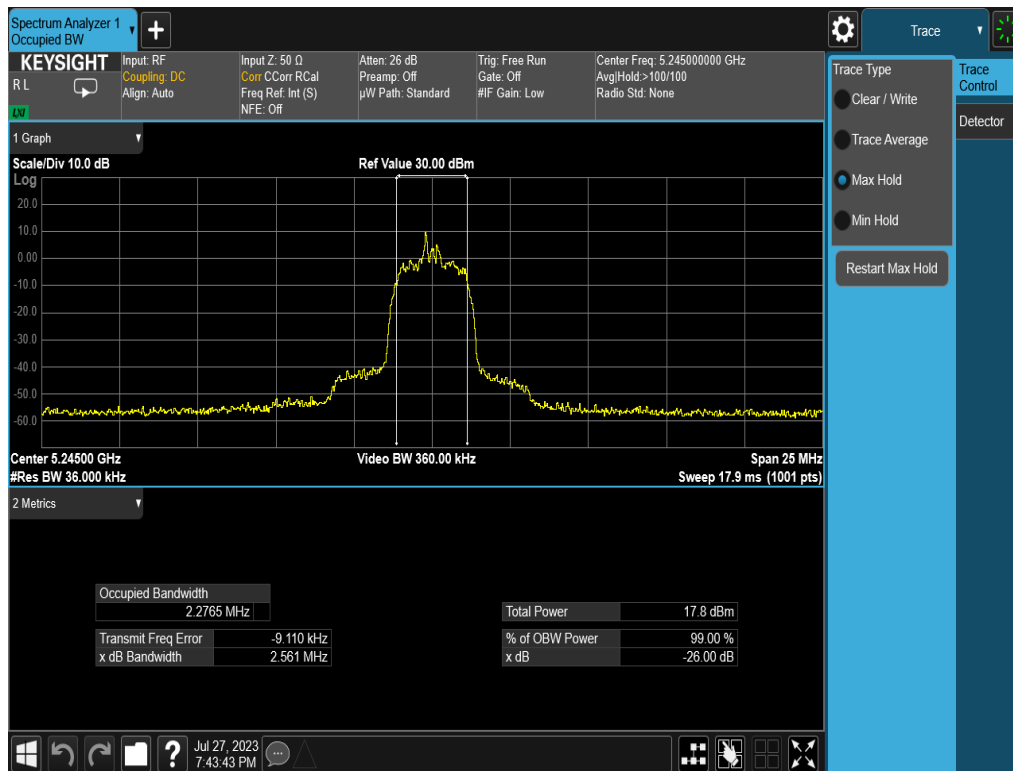

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 17 of 72

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

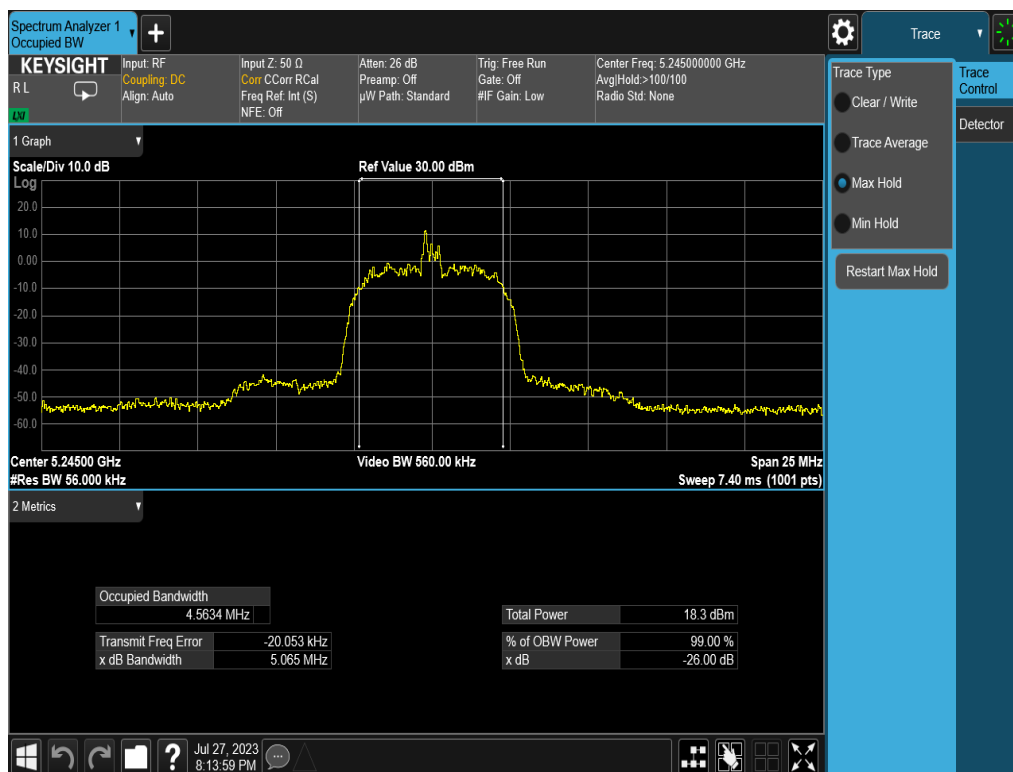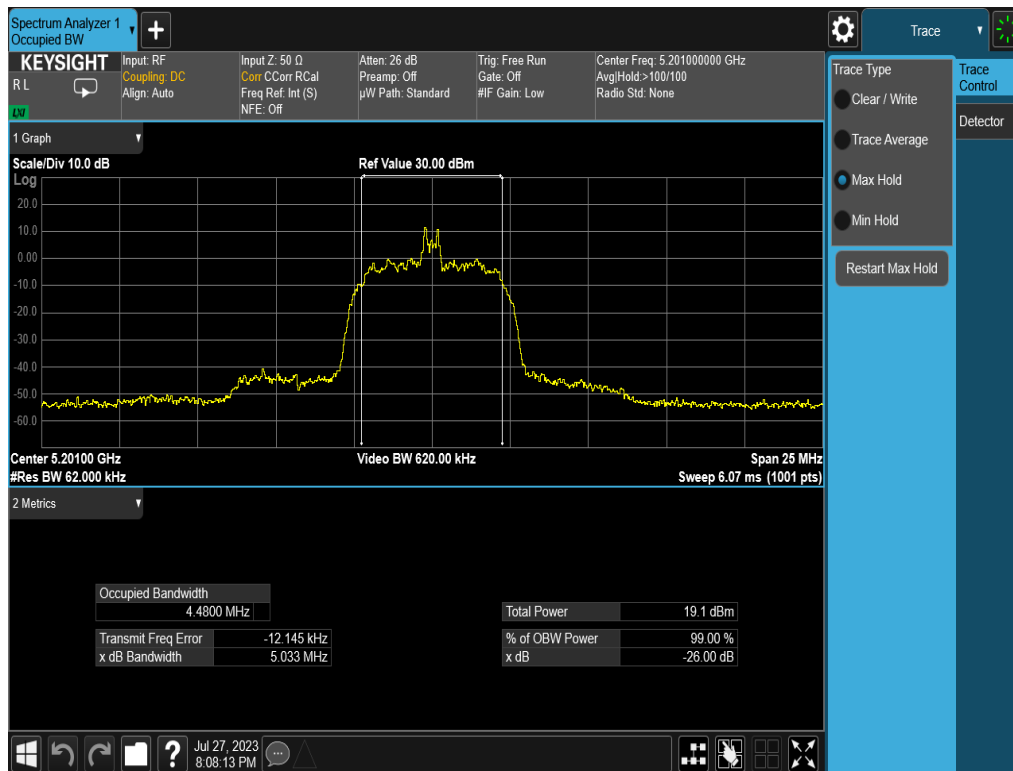


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 18 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

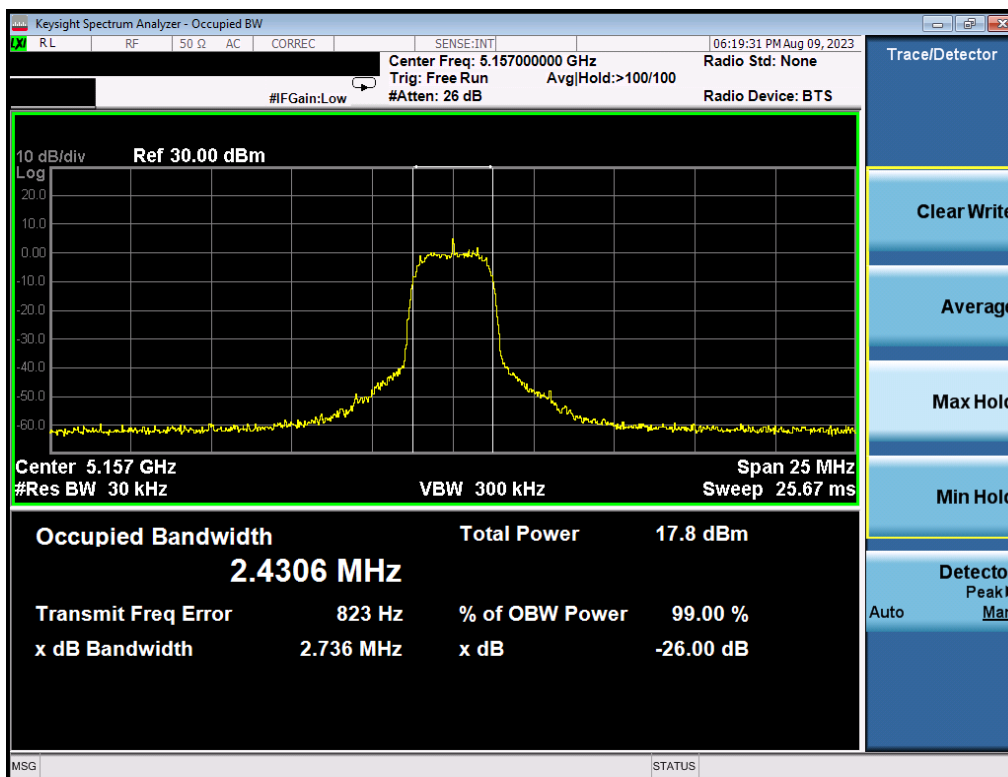


Plot 7-7. 26dB BW & 99% OBW (HDRp4, 5157MHz)

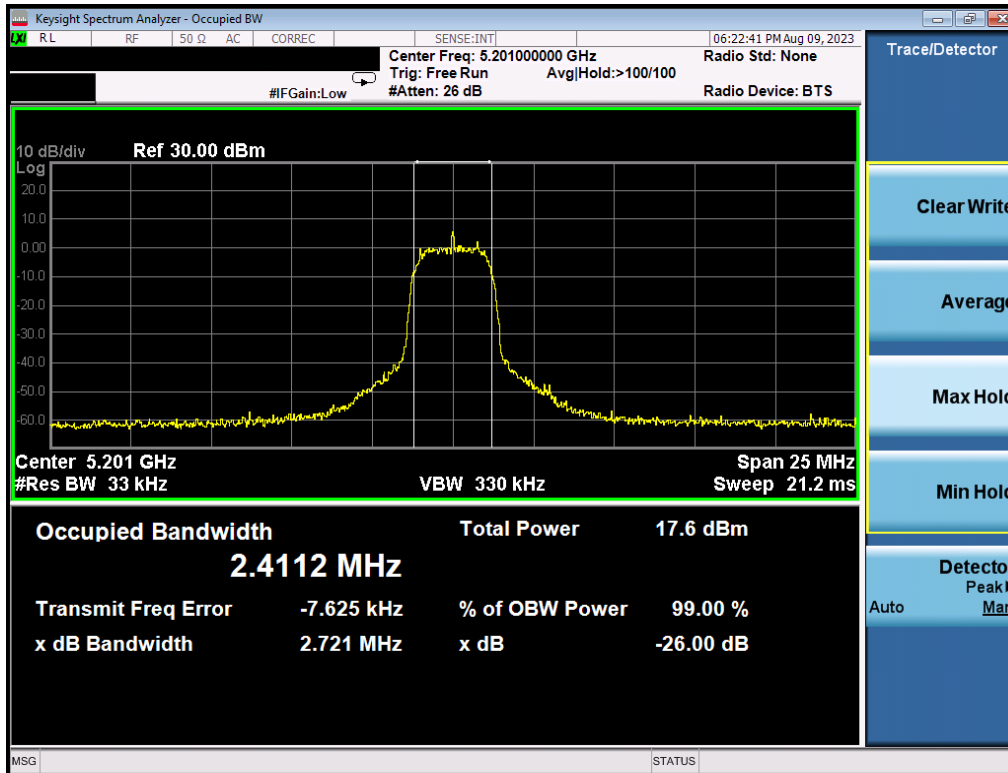


Plot 7-8. 26dB BW & 99% OBW (HDRp4, 5201MHz)

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 19 of 72

V 10.5 12/15/2021

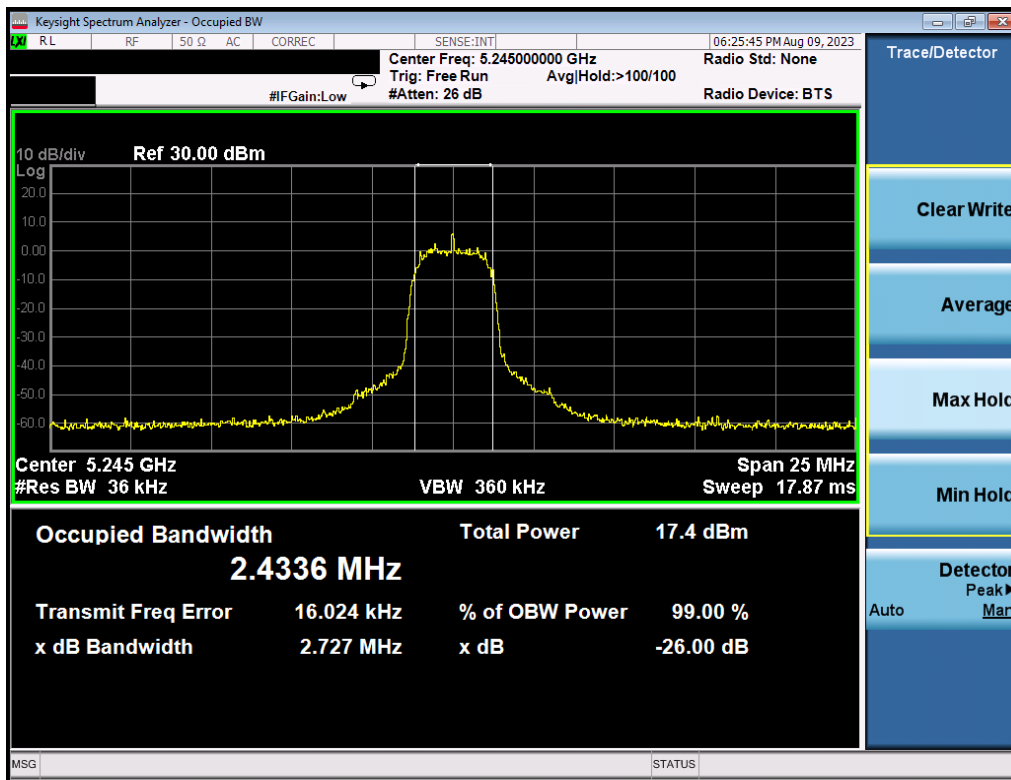


Plot 7-9. 26dB BW & 99% OBW (HDRp4, 5245MHz)

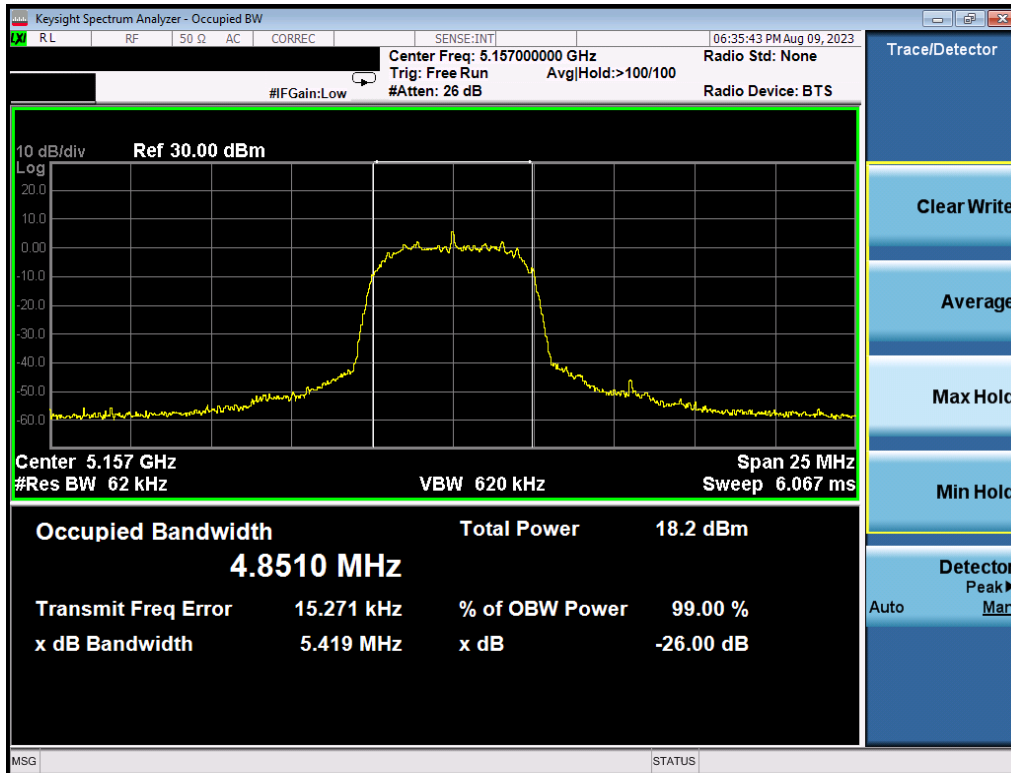


Plot 7-10. 26dB BW & 99% OBW (HDRp8, 5157MHz)

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 20 of 72

V 10.5 12/15/2021

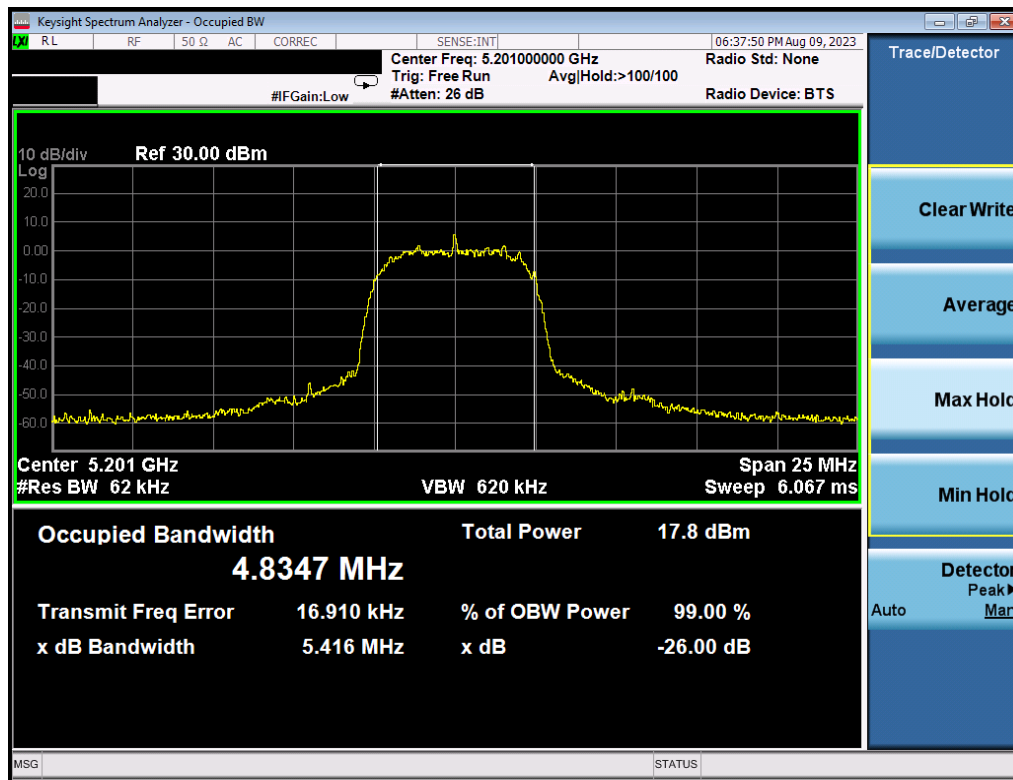

Plot 7-11. 26dB BW & 99% OBW (HDRp8, 5201MHz)

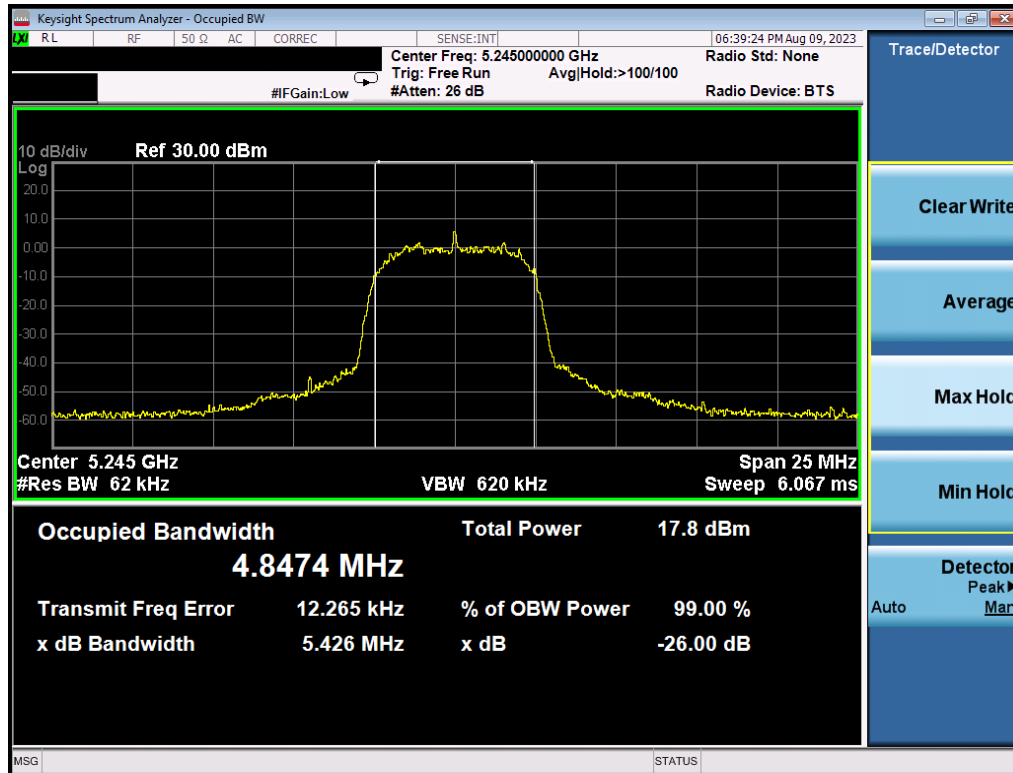

Plot 7-12. 26dB BW & 99% OBW (HDRp8, 5245MHz)

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 21 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3 6dB & 99% Bandwidth Measurement – HDR

§2.1049; §15.407 (e);

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 22 of 72

V 10.5 12/15/2021



6dB & 99% Bandwidth Measurements

	Frequency [MHz]	Mode	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5731	HDR4	2.3051	0.5751	0.5000	Pass
	5788	HDR4	2.3329	0.5462	0.5000	Pass
	5844	HDR4	2.3052	0.5670	0.5000	Pass
	5731	HDR8	4.5073	0.5937	0.5000	Pass
	5788	HDR8	4.5064	0.6066	0.5000	Pass
	5844	HDR8	4.5094	0.5851	0.5000	Pass
	5731	HDRp4	2.4475	2.2290	0.5000	Pass
	5788	HDRp4	2.4334	2.1340	0.5000	Pass
	5844	HDRp4	2.4146	2.1490	0.5000	Pass
	5731	HDRp8	4.8375	3.6440	0.5000	Pass
	5788	HDRp8	4.7915	3.7990	0.5000	Pass
	5844	HDRp8	4.8777	4.2740	0.5000	Pass


Table 7-3. Conducted BW Measurements

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 23 of 72


V 10.5 12/15/2021

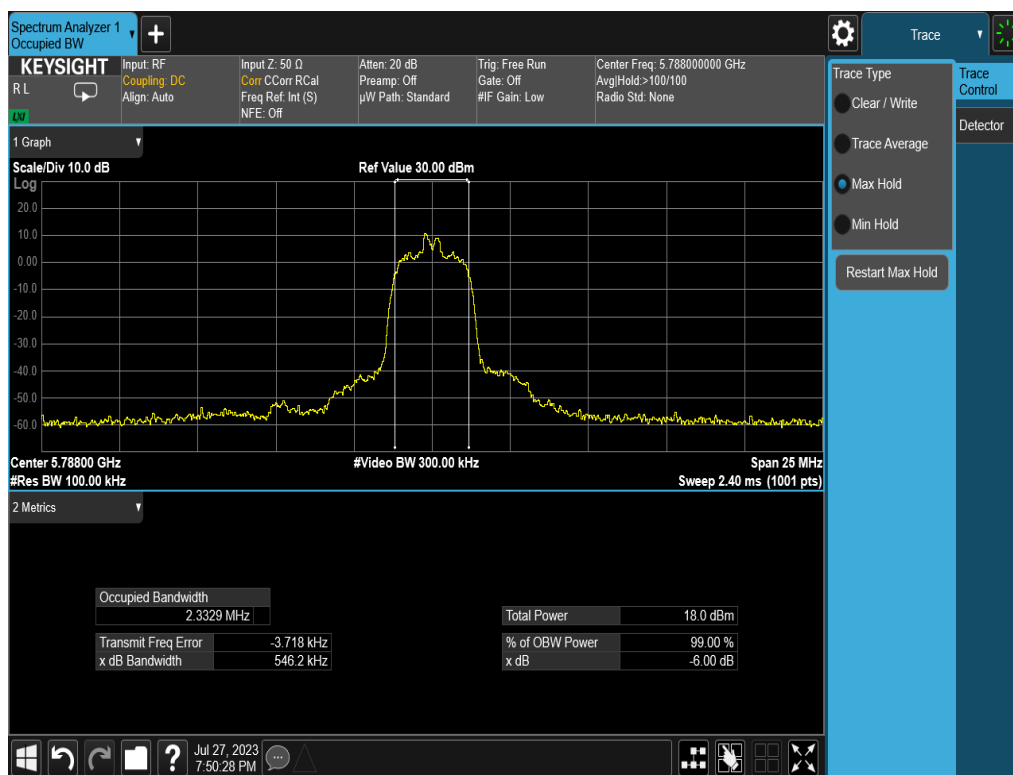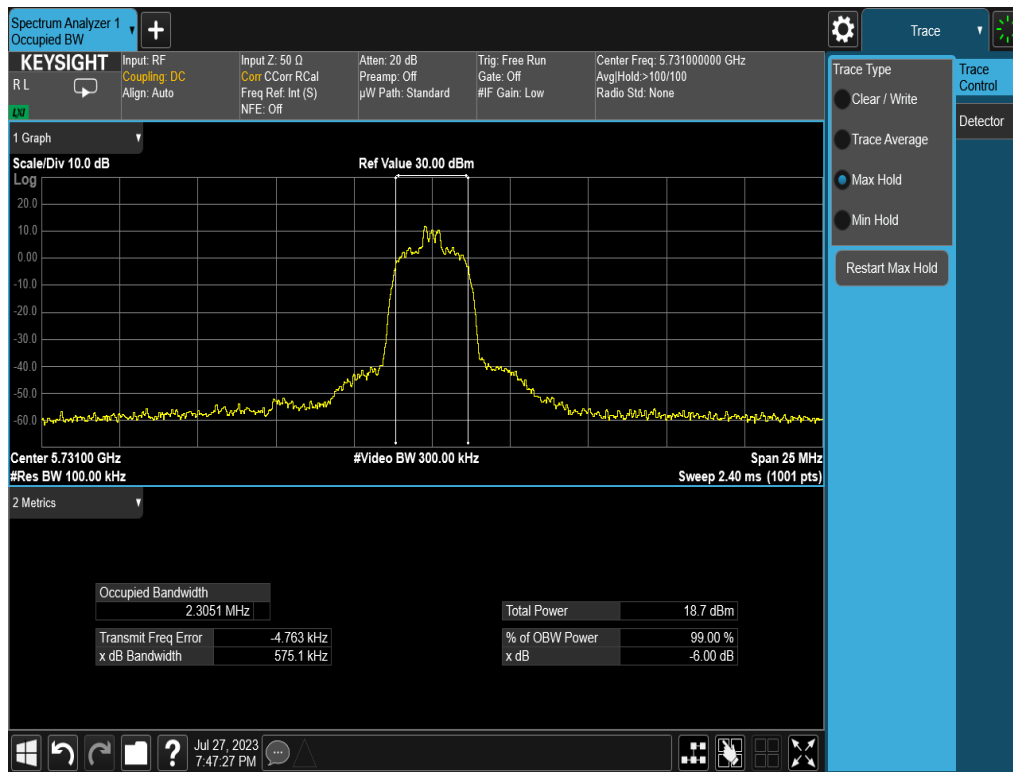

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 24 of 72

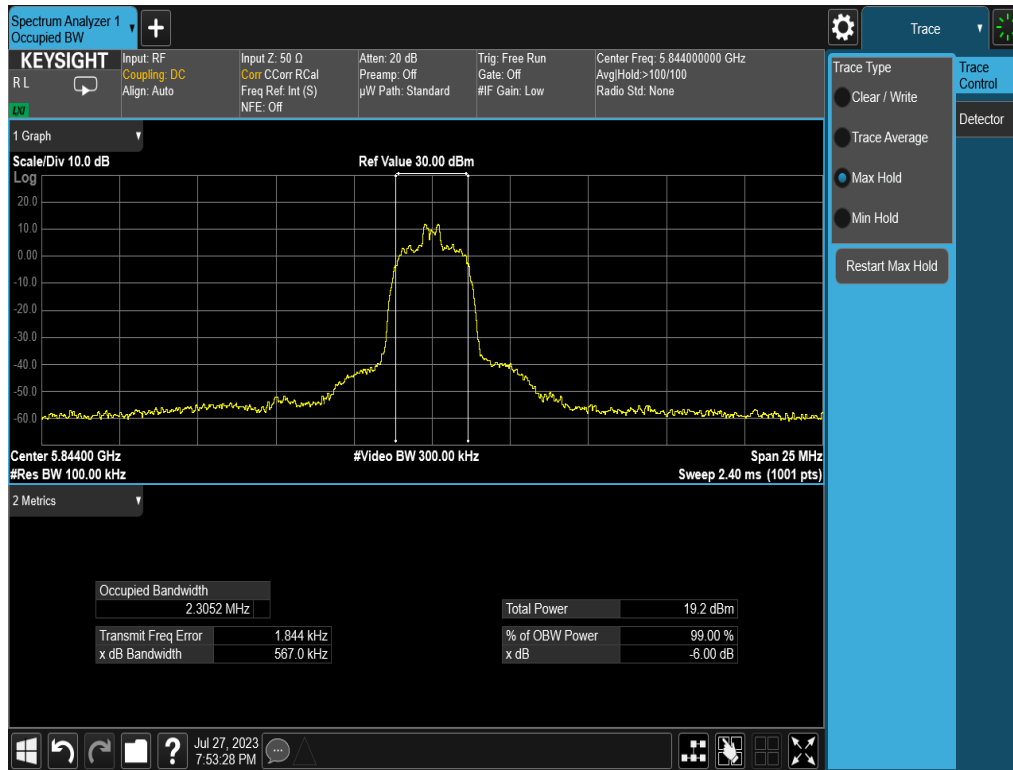

Plot 7-15. 6dB BW & 99% OBW (HDR4, 5844MHz)

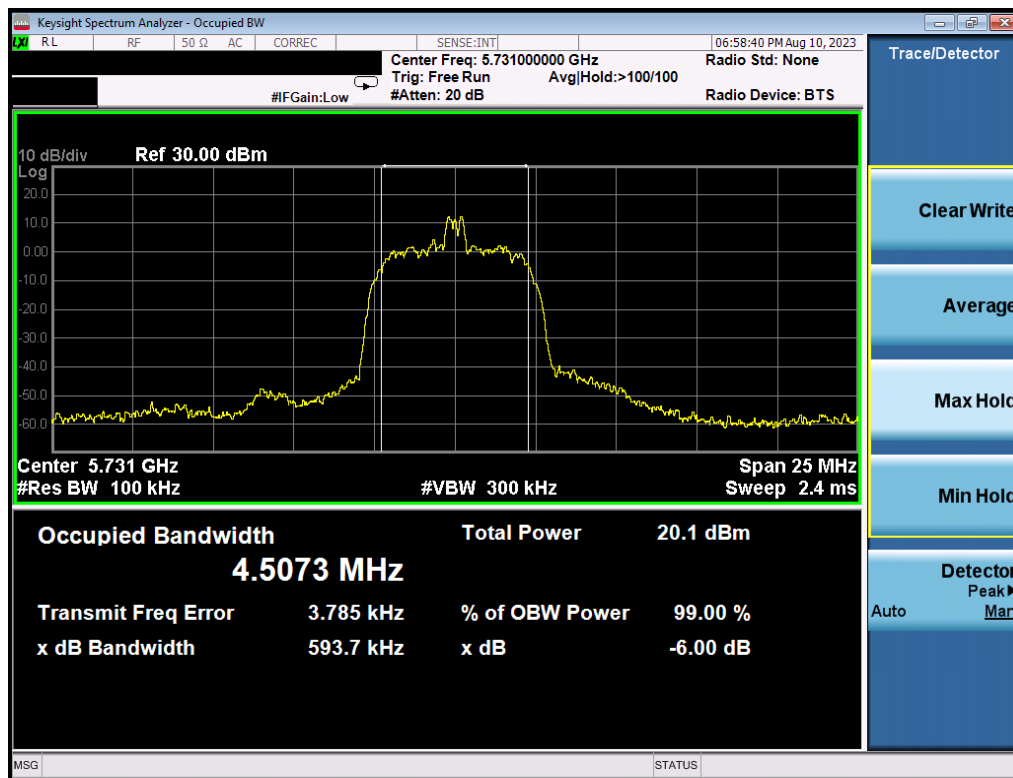


Plot 7-16. 6dB BW & 99% OBW (HDR8, 5731MHz)


FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 25 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

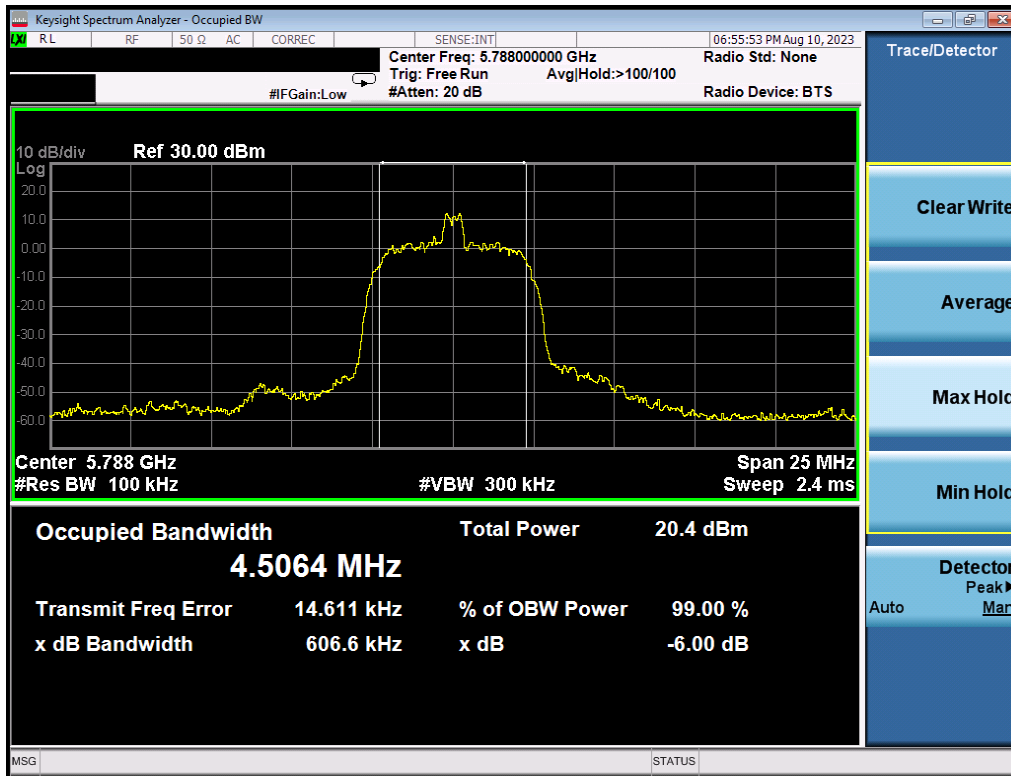

Plot 7-17. 6dB BW & 99% OBW (HDR8, 5788MHz)

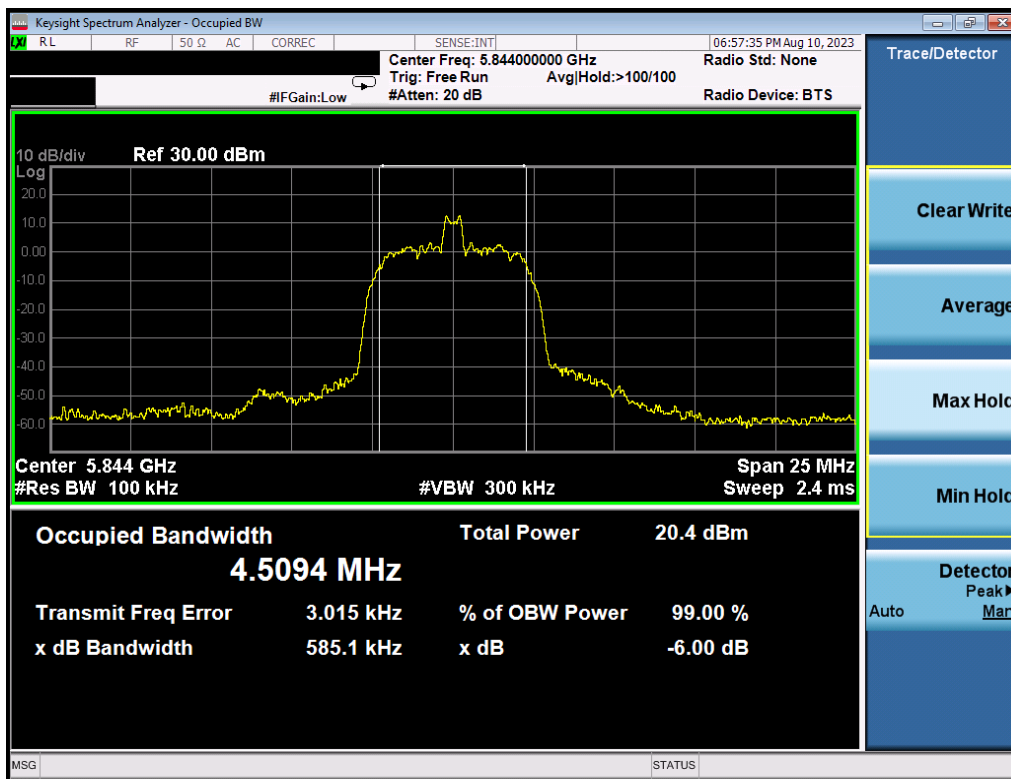


Plot 7-18. 6dB BW & 99% OBW (HDR8, 5844MHz)


FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 26 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

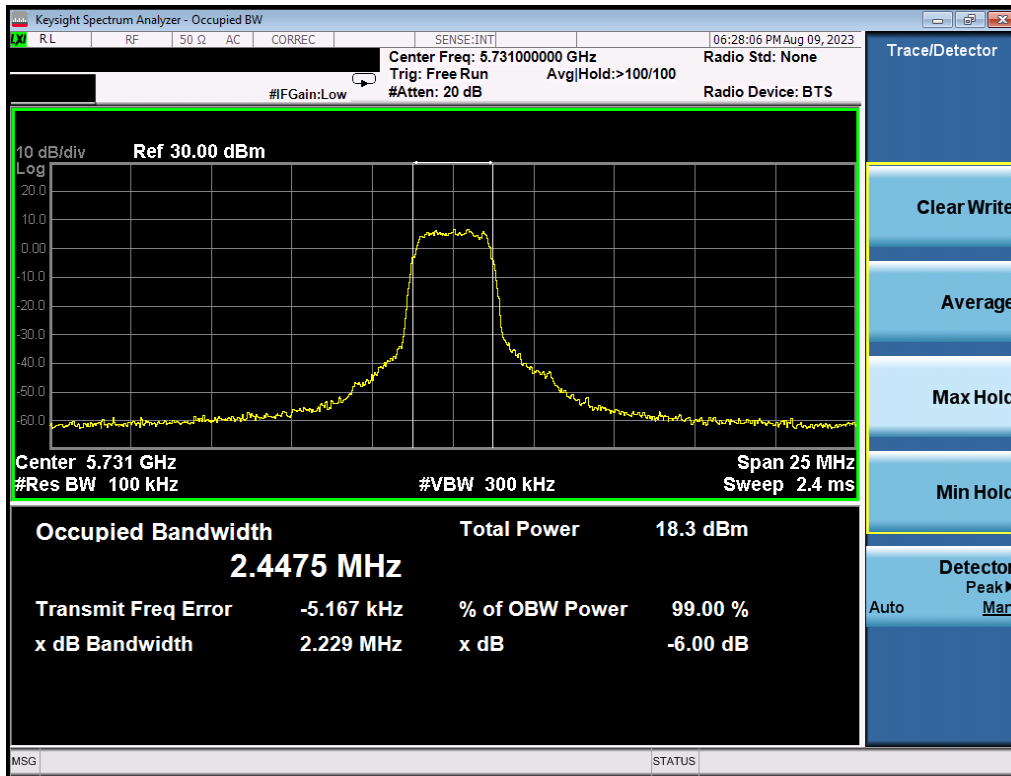


Plot 7-19. 6dB BW & 99% OBW (HDRp4, 5731MHz)

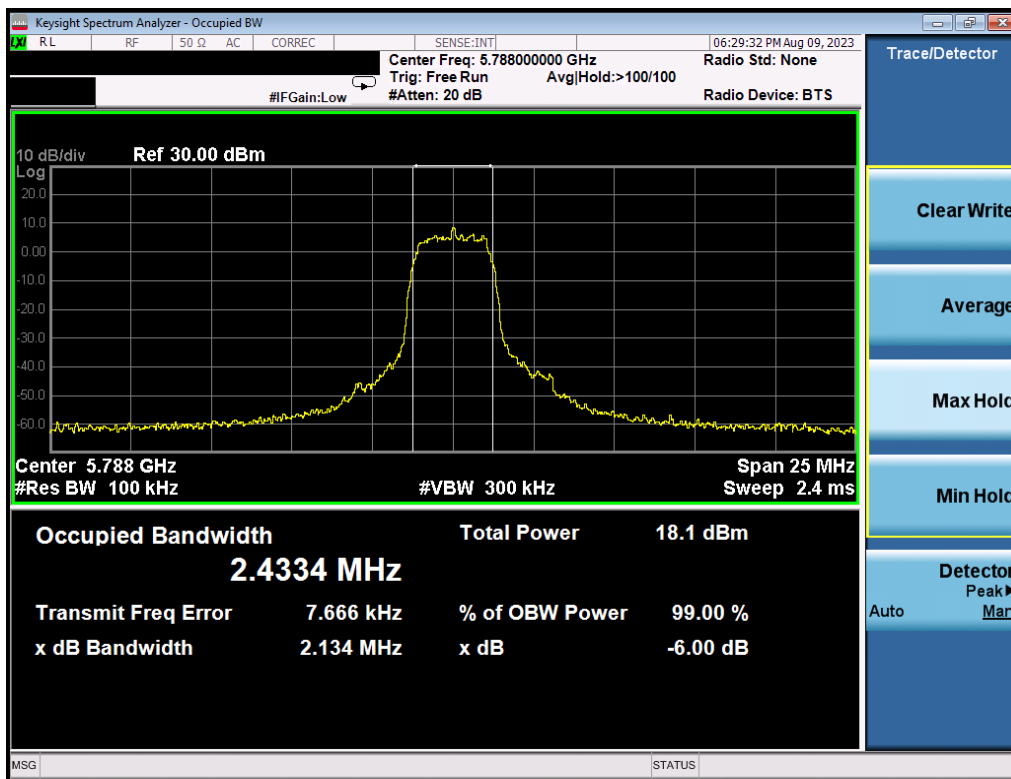


Plot 7-20. 6dB BW & 99% OBW (HDRp4, 5788MHz)

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 27 of 72

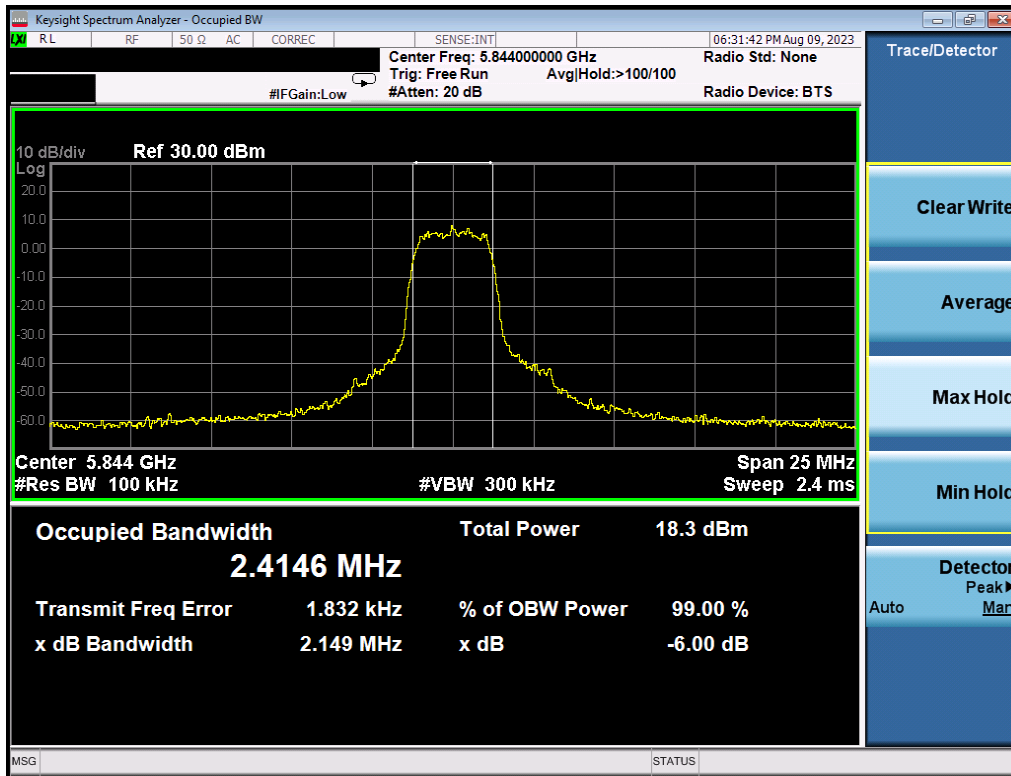


Plot 7-21. 6dB BW & 99% OBW (HDRp4, 5844MHz)

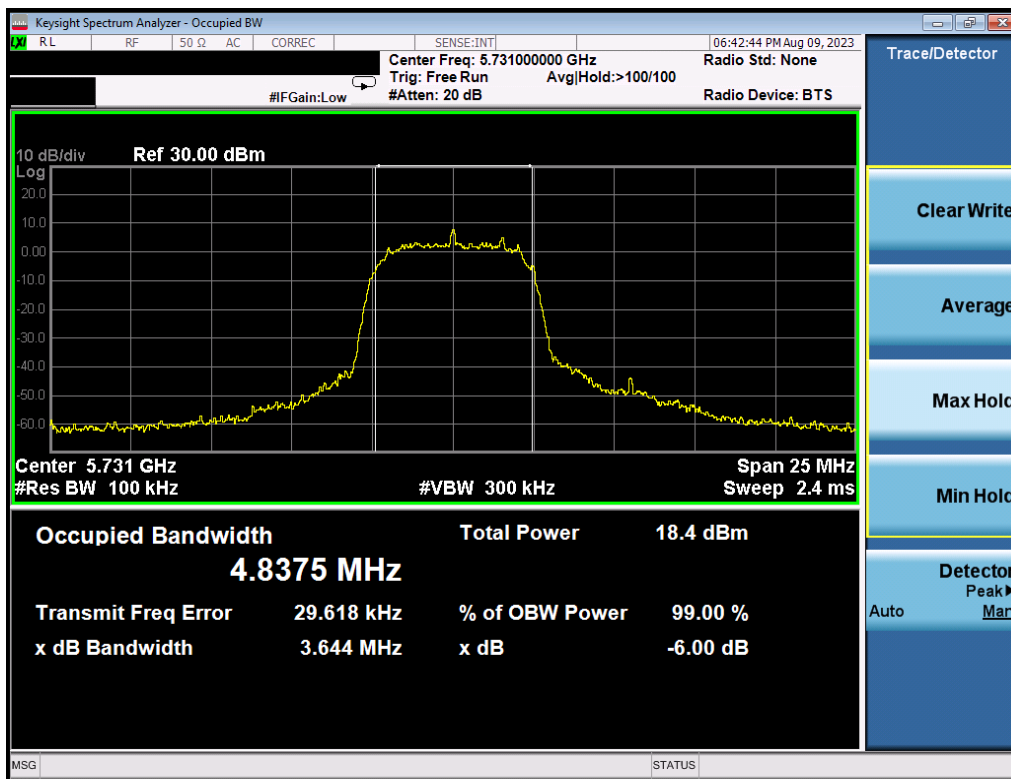


Plot 7-22. 6dB BW & 99% OBW (HDRp8, 5731MHz)

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 28 of 72

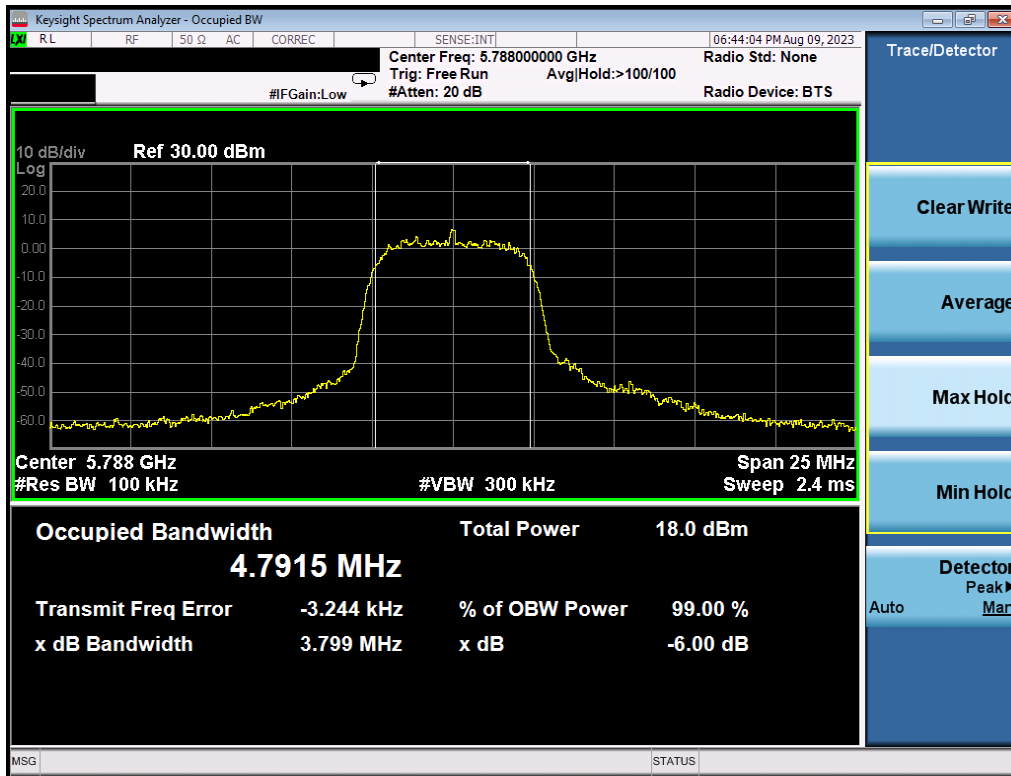

Plot 7-23. 6dB BW & 99% OBW (HDRp8, 5788MHz)

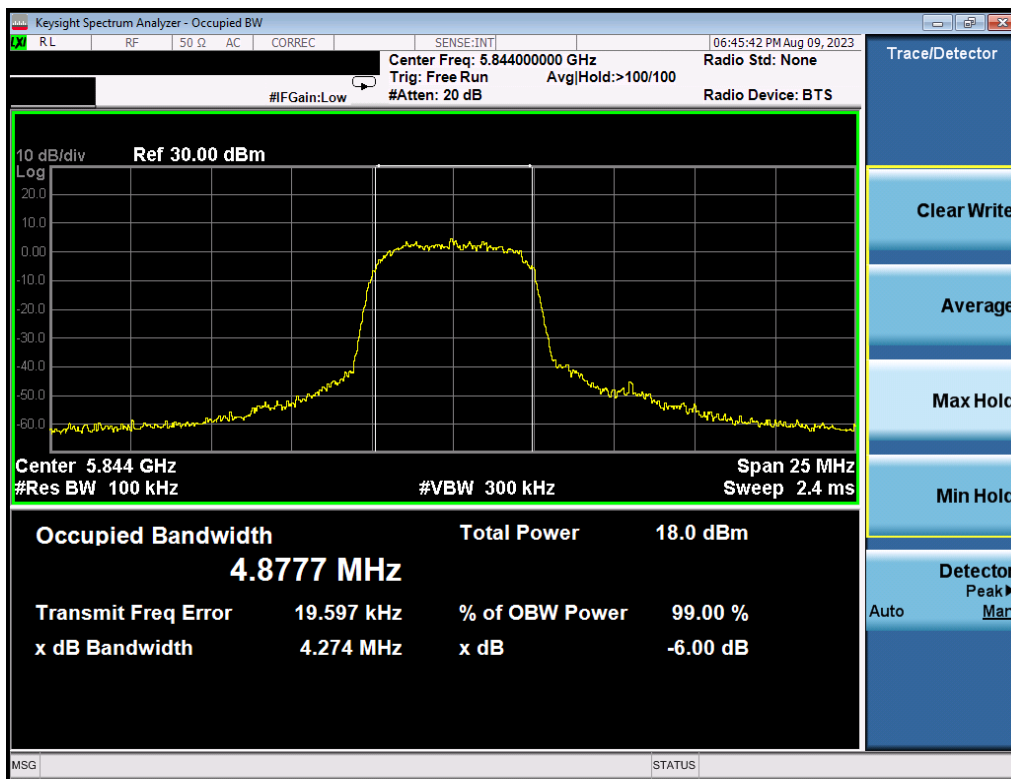

Plot 7-24. 6dB BW & 99% OBW (HDRp8, 5844MHz)

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 29 of 72

7.4 Conducted Output Power - HDR

§15.407(a.1.iv), §15.407(a.3)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 30 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.1 Conducted Output Power Measurements

Freq [MHz]	Detector	Conducted Powers [dBm]				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
		HDR4	HDR8	HDRp4	HDRp8		
5157	AVG	8.90	8.88	8.89	8.94	23.98	-15.04
5201	AVG	8.96	8.95	8.78	8.76	23.98	-15.02
5245	AVG	8.75	8.99	8.83	8.81	23.98	-14.99
5731	AVG	9.92	9.88	9.89	9.86	30.00	-20.08
5788	AVG	9.88	9.86	9.83	9.82	30.00	-20.12
5844	AVG	9.86	9.83	9.83	9.79	30.00	-20.14

Table 7-4. Maximum Conducted Output Power

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 31 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Maximum Power Spectral Density – HDR

§15.407(a.1.iv), §15.407(a.3)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz band, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz for U-NII 1, 500kHz for U-NII 3
4. VBW $\geq$ 3MHz for U-NII 1, $\geq 3 \times$ RBW for U-NII 3
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 32 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.5.1 Power Spectral Density Measurements

	Frequency [MHz]	Mode	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5157	HDR4	6.21	11.0	-4.79
	5201	HDR4	6.46	11.0	-4.55
	5245	HDR4	5.90	11.0	-5.10
	5157	HDR8	4.91	11.0	-6.09
	5201	HDR8	4.95	11.0	-6.05
	5245	HDR8	4.36	11.0	-6.64
	5157	HDRp4	5.87	11.0	-5.13
	5201	HDRp4	5.50	11.0	-5.50
	5245	HDRp4	5.68	11.0	-5.32
	5157	HDRp8	3.09	11.0	-7.91
	5201	HDRp8	2.90	11.0	-8.10
	5245	HDRp8	3.35	11.0	-7.65


Table 7-5. Power Spectral Density Measurements

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 33 of 72

V 10.5 12/15/2021

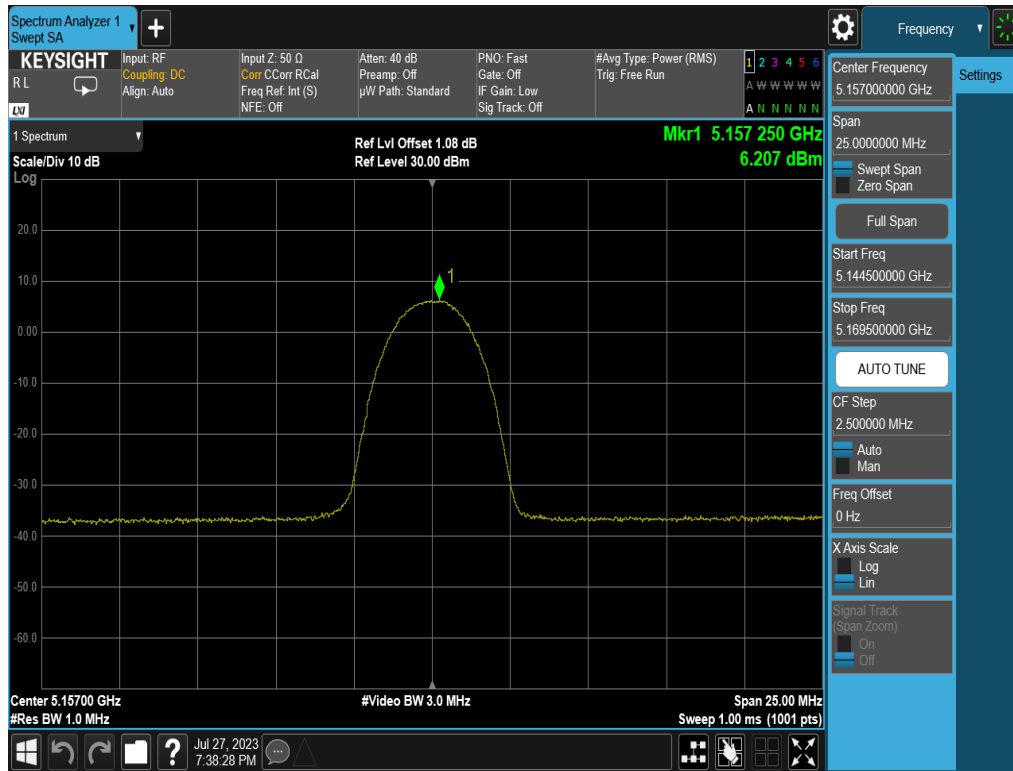

Plot 7-25. PSD (HDR4, 5157MHz)

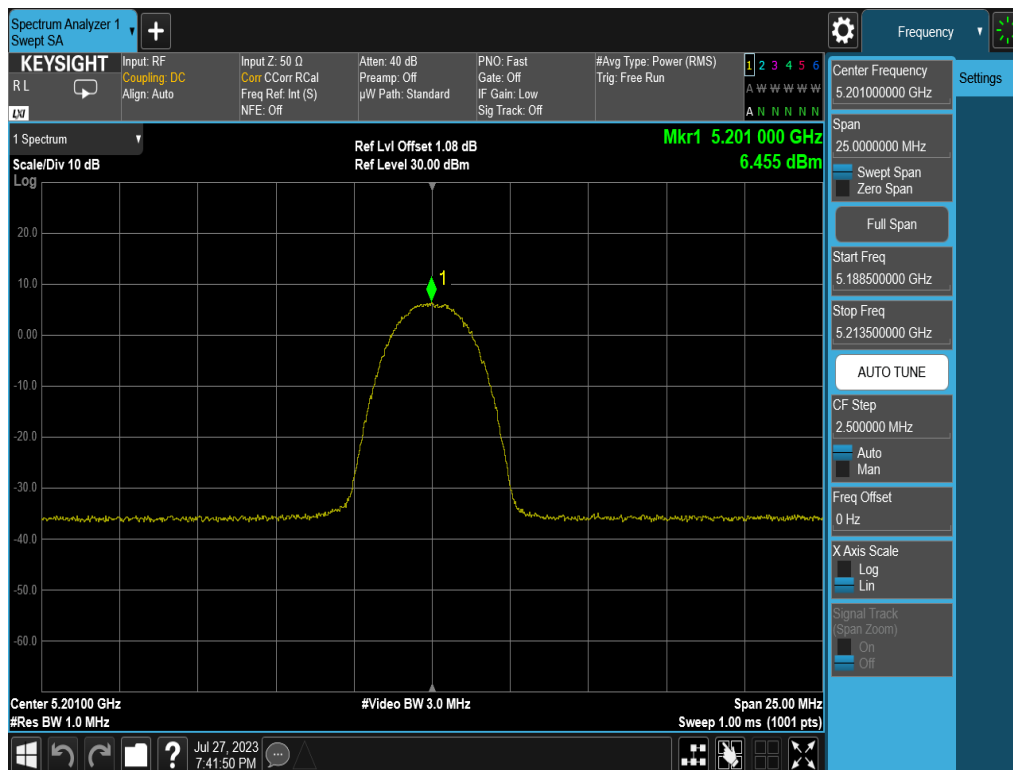


Plot 7-26. PSD (HDR4, 5201MHz)


FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 34 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

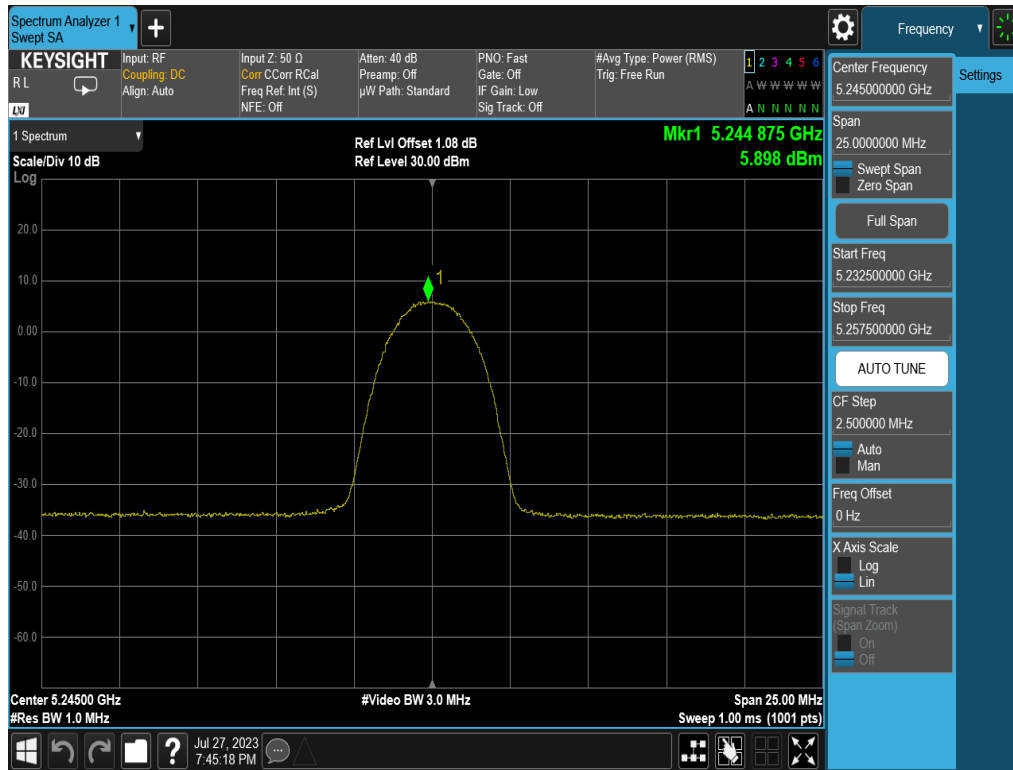

Plot 7-27. PSD (HDR4, 5245MHz)

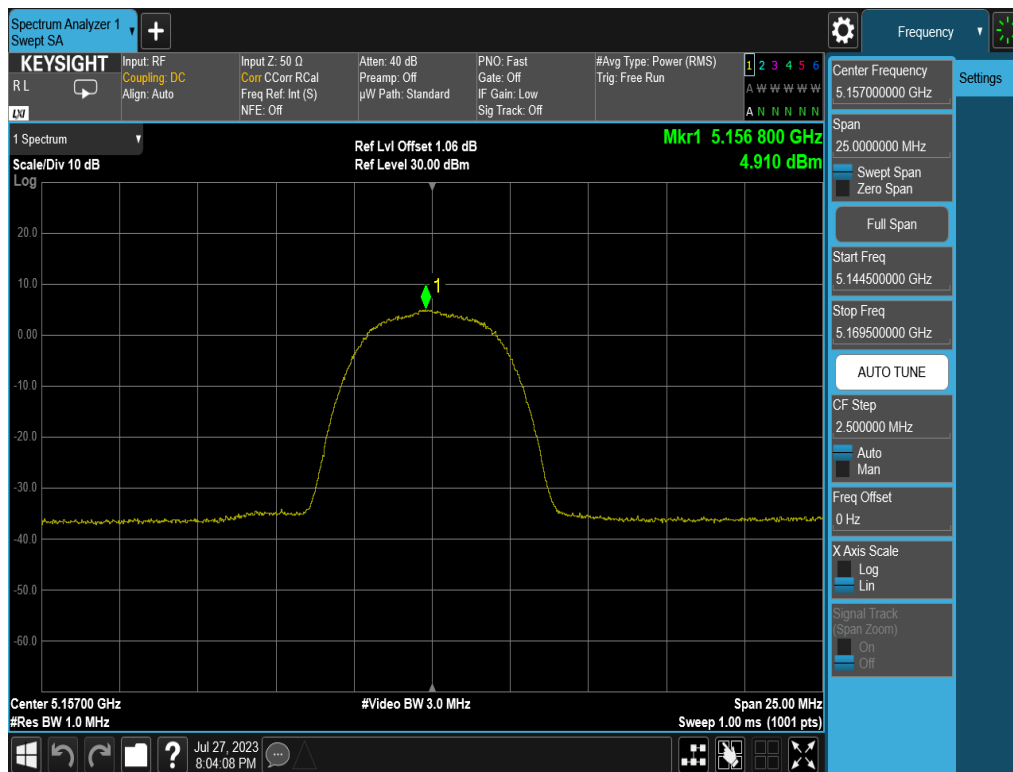


Plot 7-28. PSD (HDR8, 5157MHz)


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 35 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

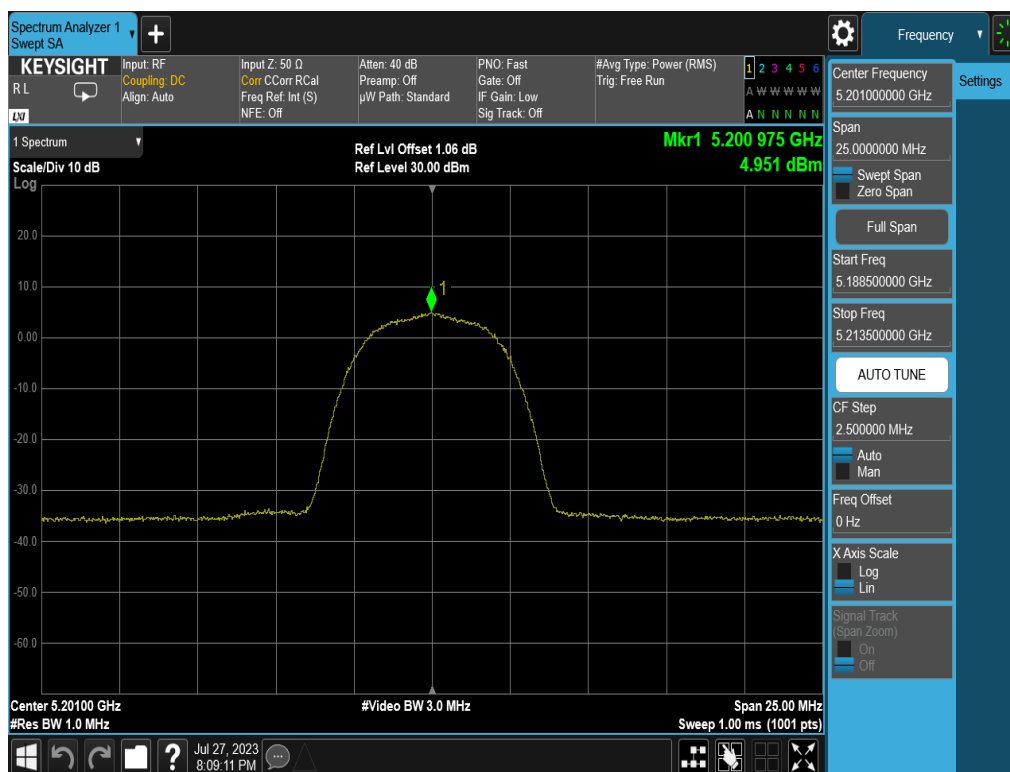


Plot 7-29. PSD (HDR8, 5201MHz)

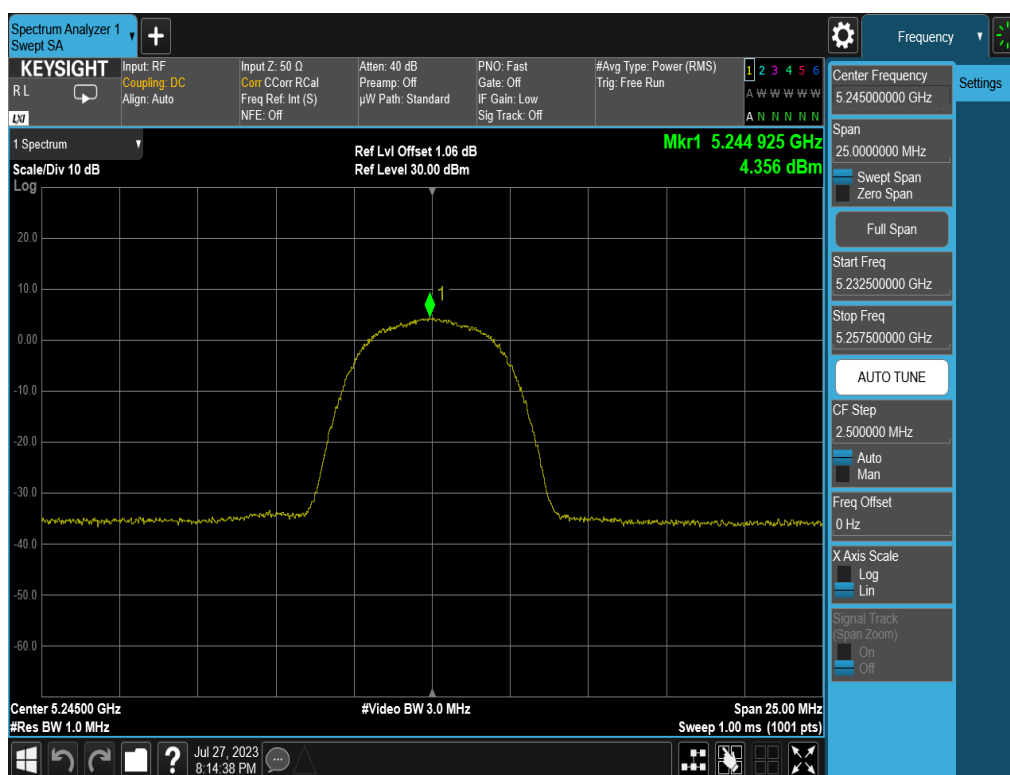


Plot 7-30. PSD (HDR8, 5245MHz)

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 36 of 72

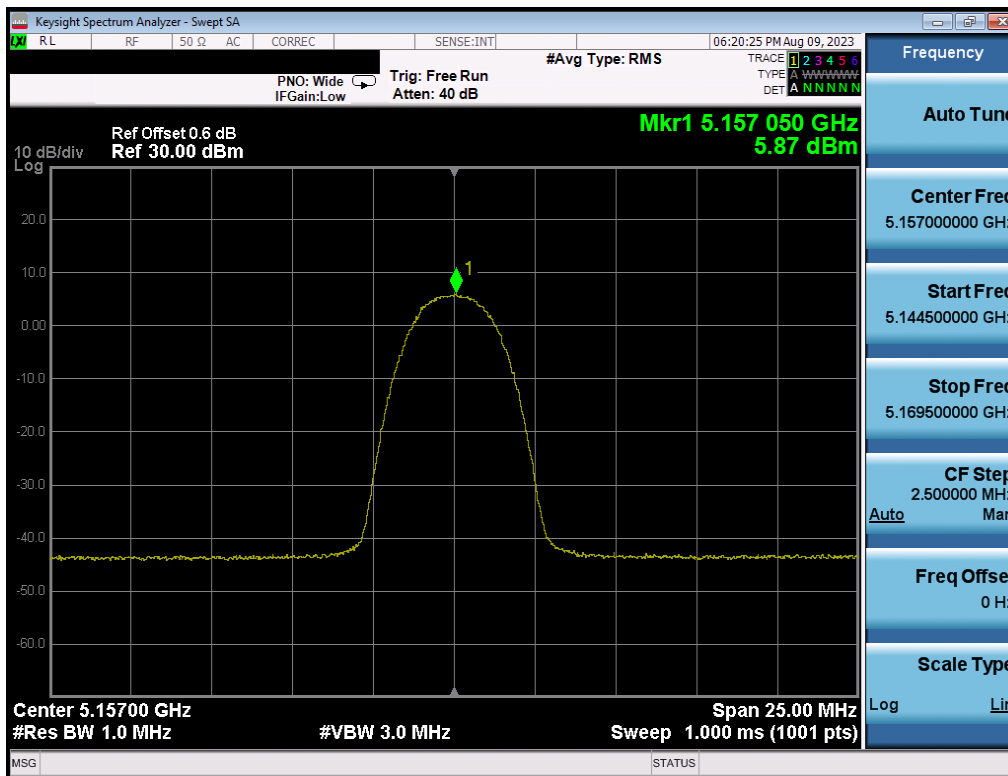


Plot 7-31. PSD (HDRp4, 5157MHz)

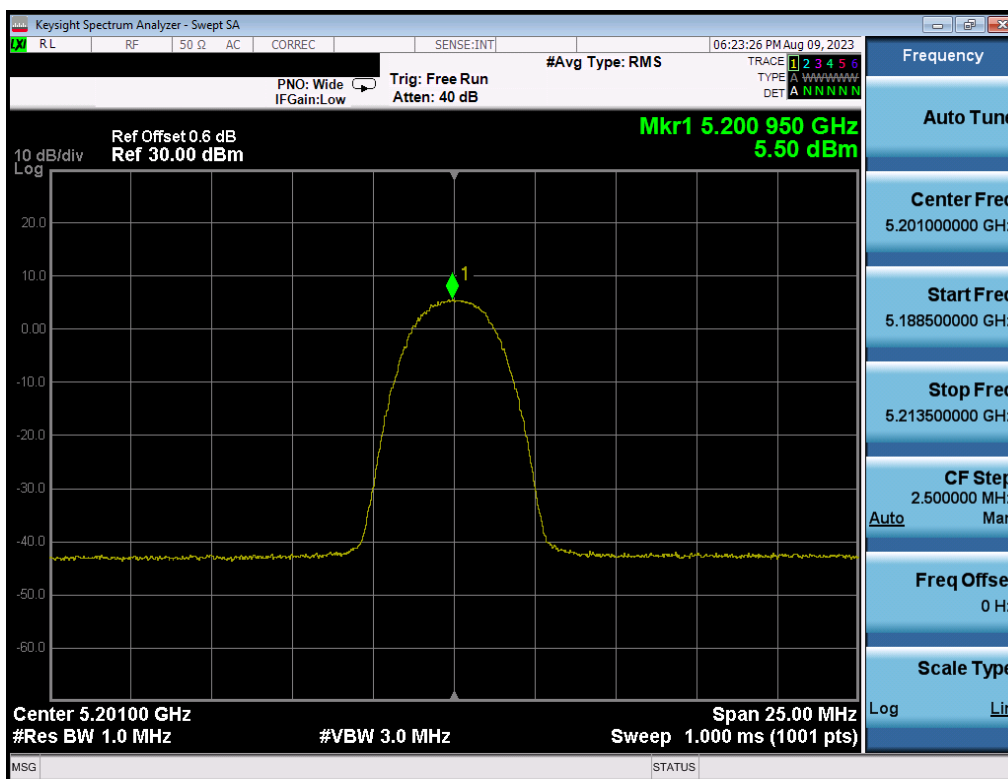


Plot 7-32. PSD (HDRp4, 5201MHz)

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 37 of 72

V 10.5 12/15/2021

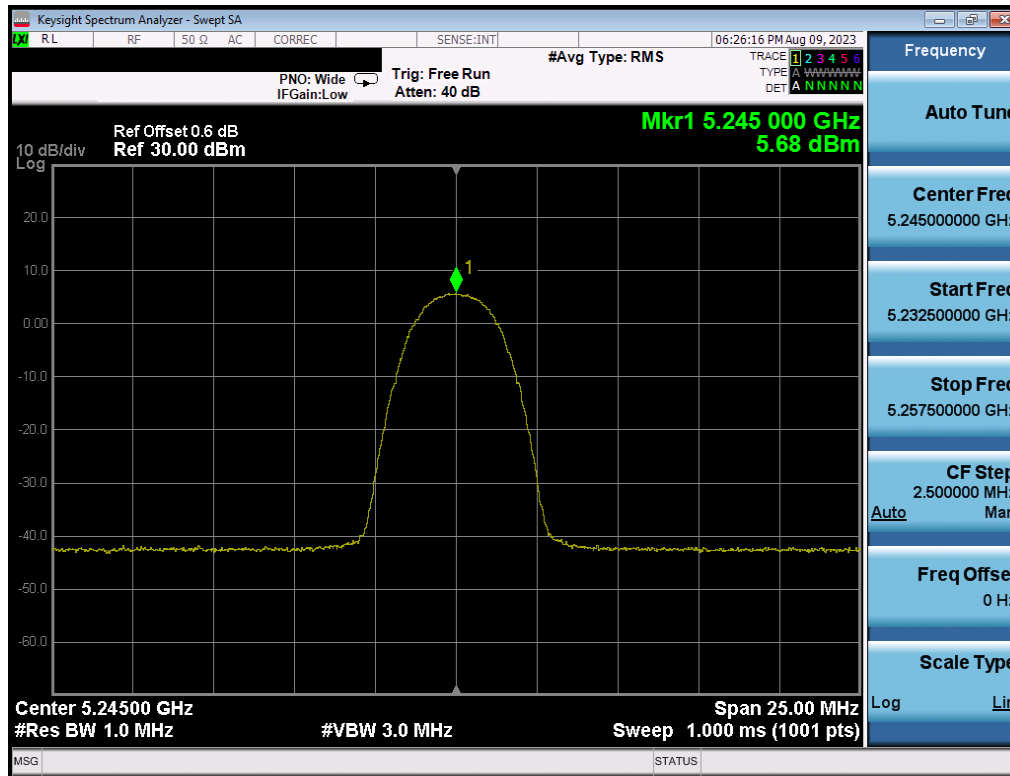


Plot 7-33. PSD (HDRp4, 5245MHz)

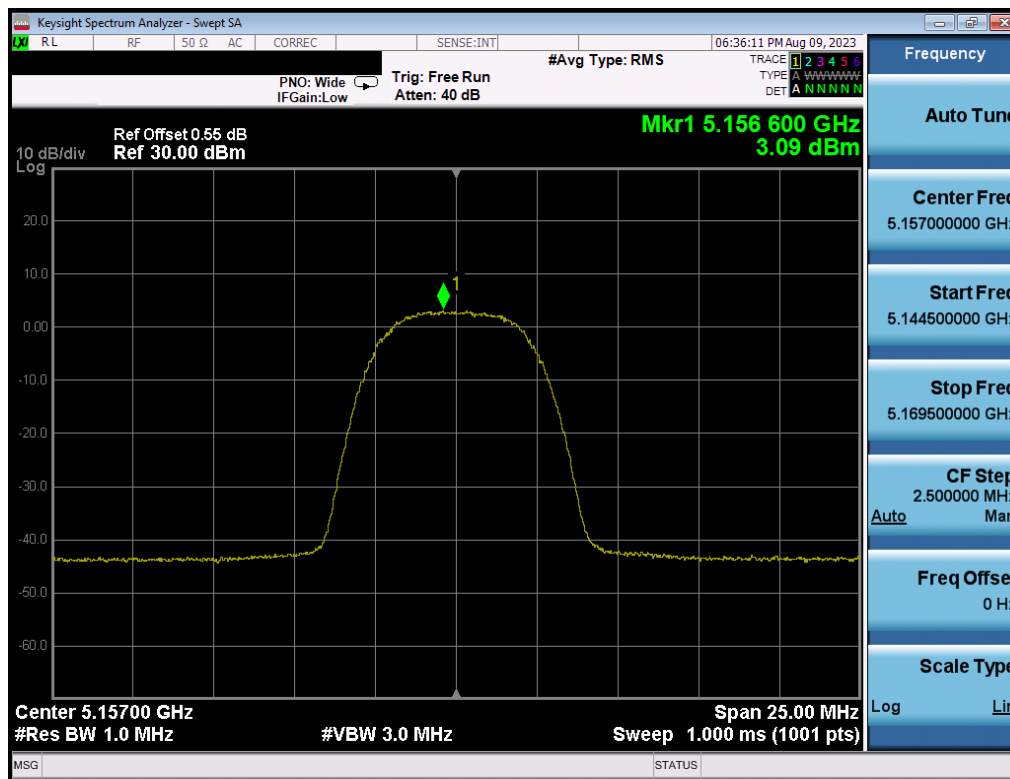


Plot 7-34. PSD (HDRp8, 5157MHz)

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 38 of 72

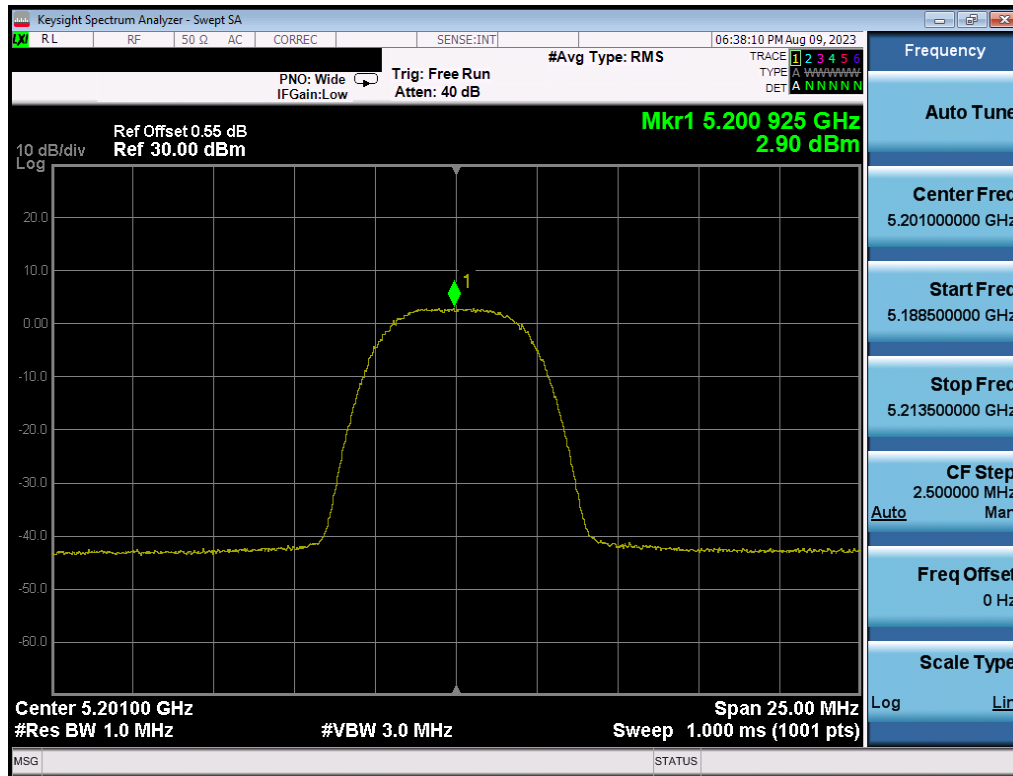

Plot 7-35. PSD (HDRp8, 5201MHz)

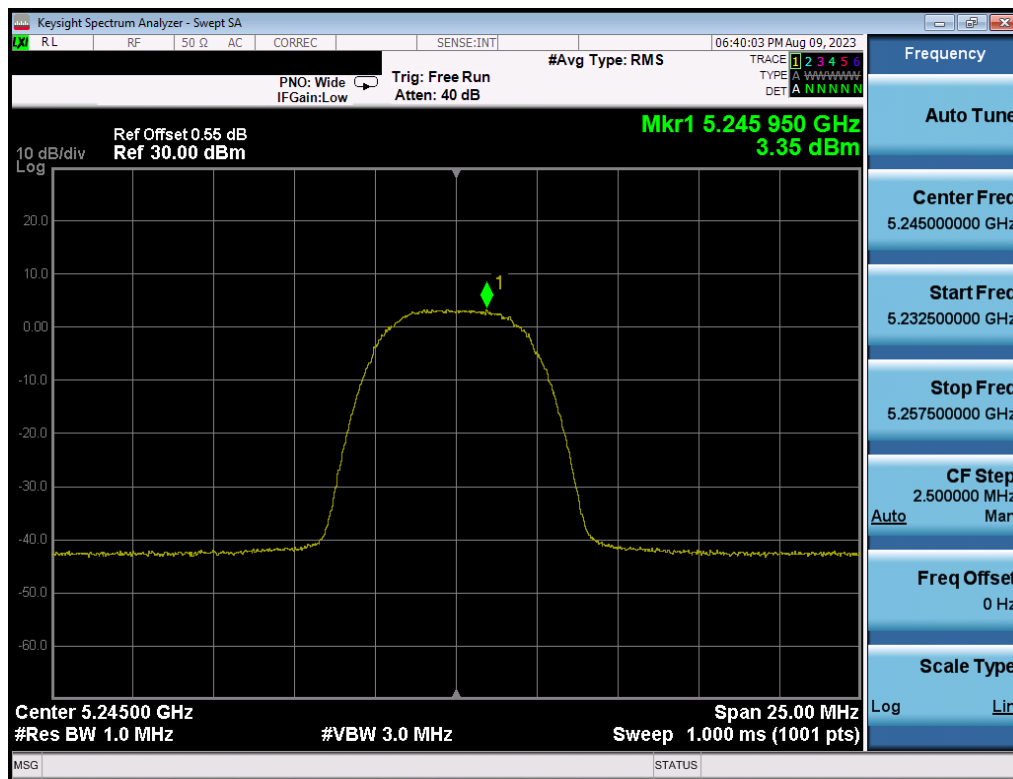

Plot 7-36. PSD (HDRp8, 5245MHz)


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 39 of 72

	Frequency [MHz]	Mode	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5731	HDR4	4.78	30.0	-25.22
	5788	HDR4	5.12	30.0	-24.89
	5844	HDR4	4.72	30.0	-25.28
	5731	HDR8	2.26	30.0	-27.74
	5788	HDR8	2.37	30.0	-27.63
	5844	HDR8	2.49	30.0	-27.51
	5731	HDRp4	4.32	30.0	-25.68
	5788	HDRp4	4.03	30.0	-25.97
	5844	HDRp4	4.15	30.0	-25.85
	5731	HDRp8	1.70	30.0	-28.30
	5788	HDRp8	1.56	30.0	-28.44
	5844	HDRp8	1.27	30.0	-28.73


Table 7-6. Power Spectral Density Measurements

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 40 of 72

V 10.5 12/15/2021

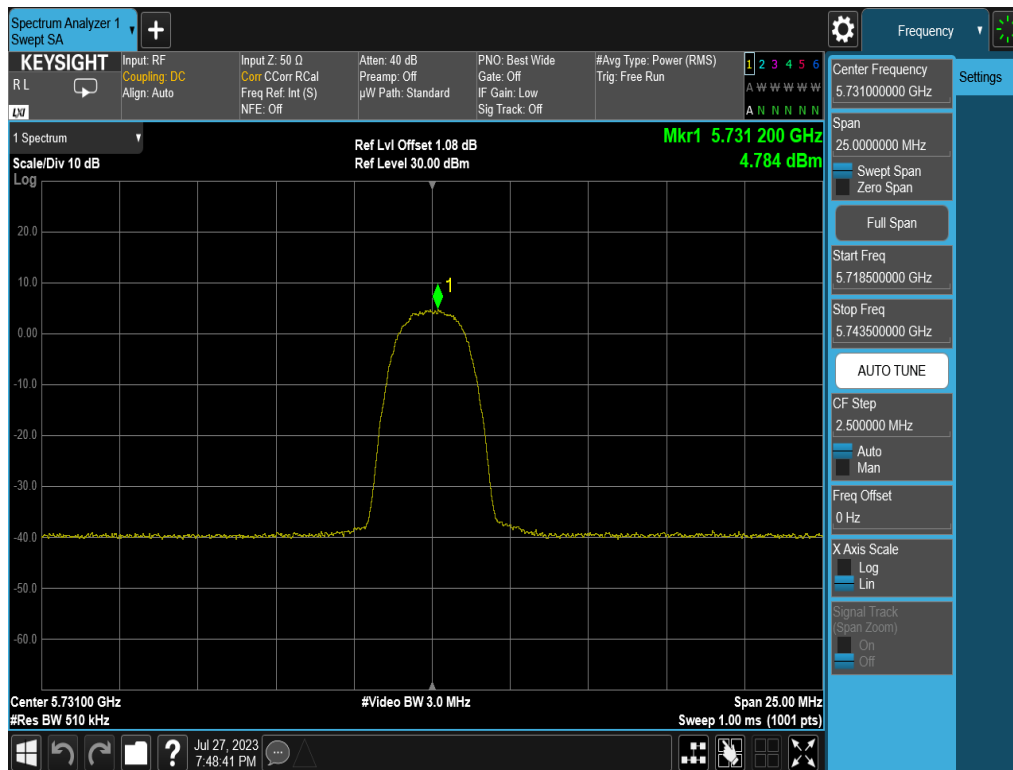


Plot 7-37. PSD (HDR4, 5731MHz)

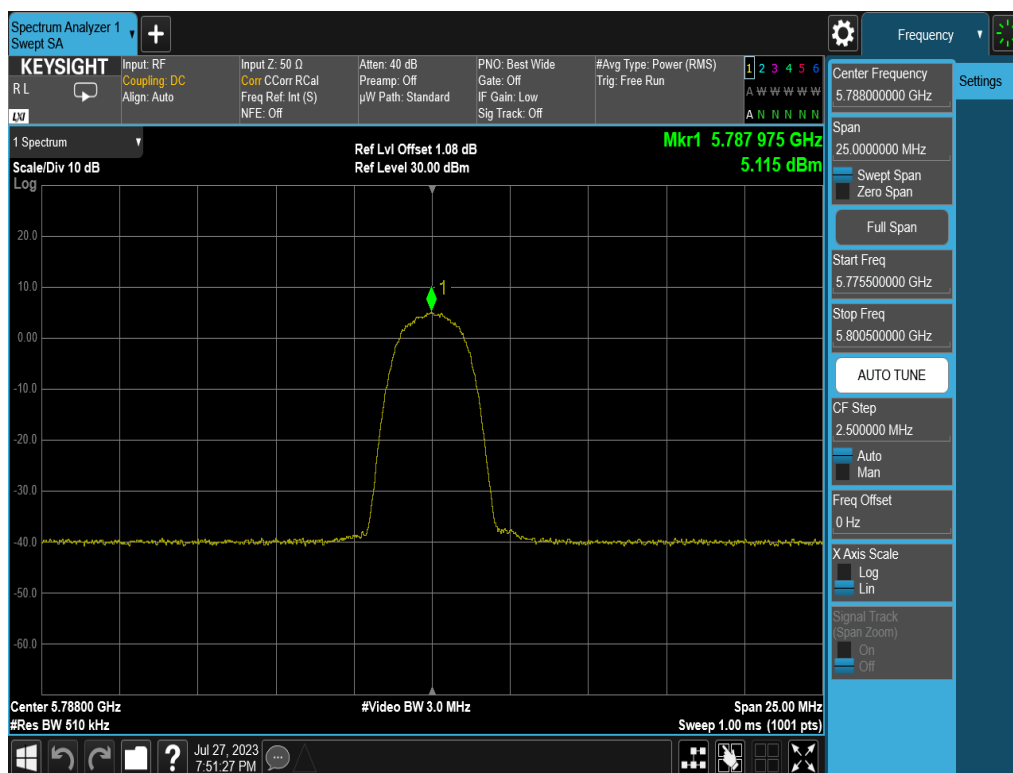


Plot 7-38. PSD (HDR4, 5788MHz)

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 41 of 72

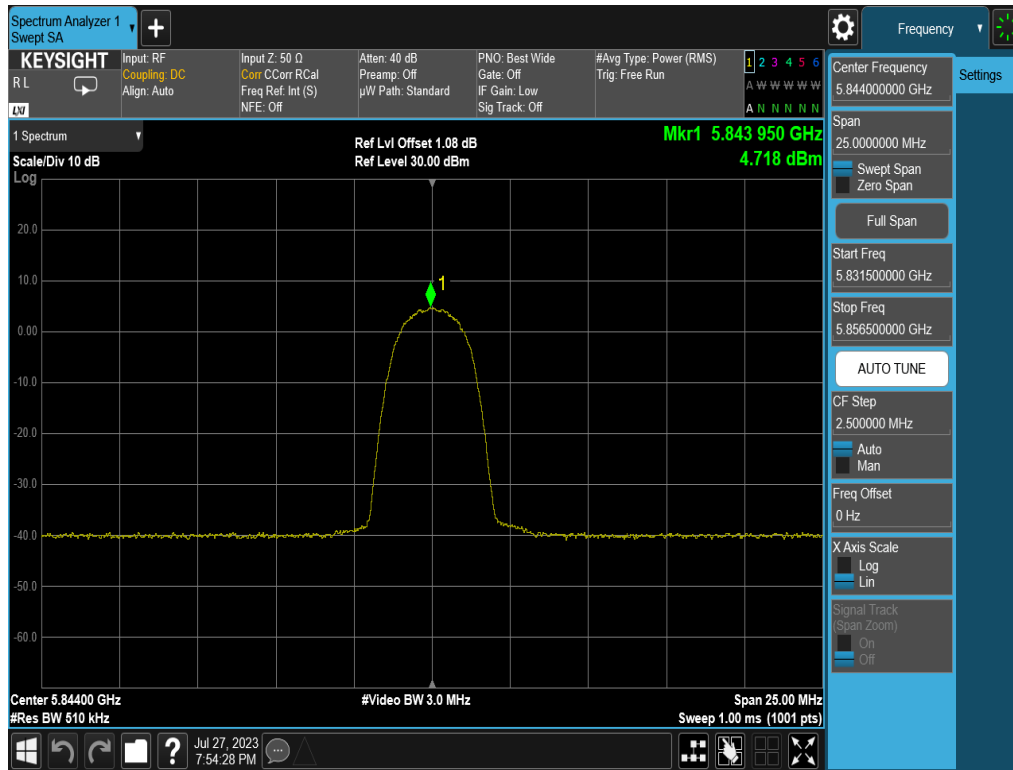


Plot 7-39. PSD (HDR4, 5844MHz)

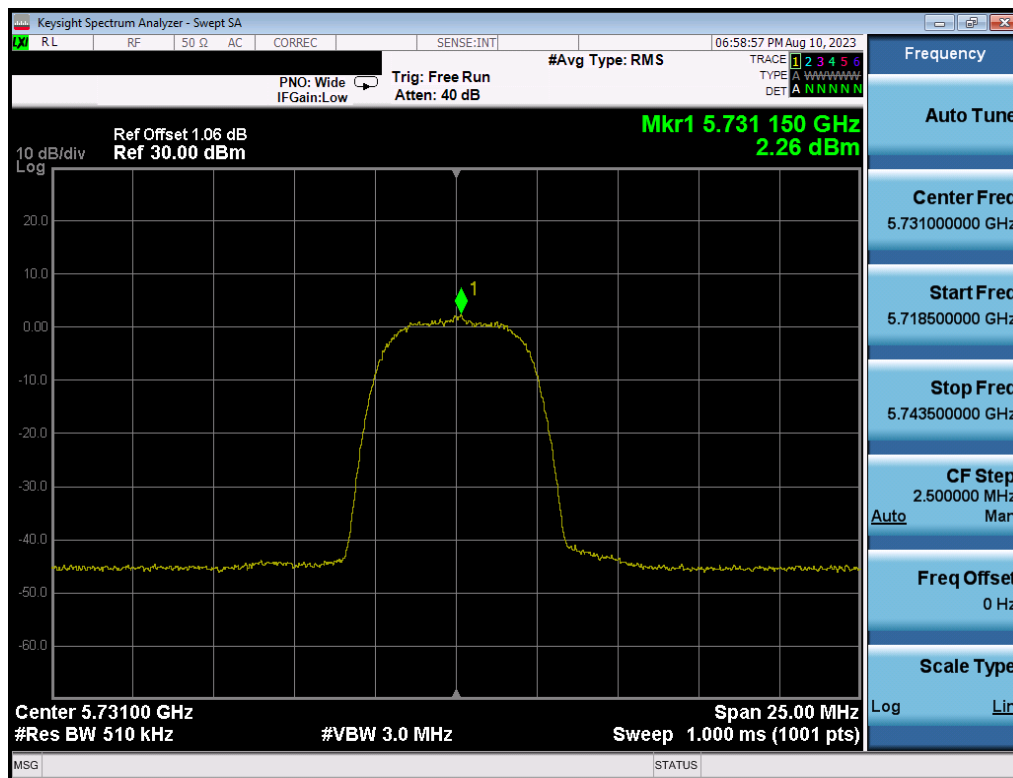


Plot 7-40. PSD (HDR8, 5731MHz)

FCC ID: BCG-A3048	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 42 of 72

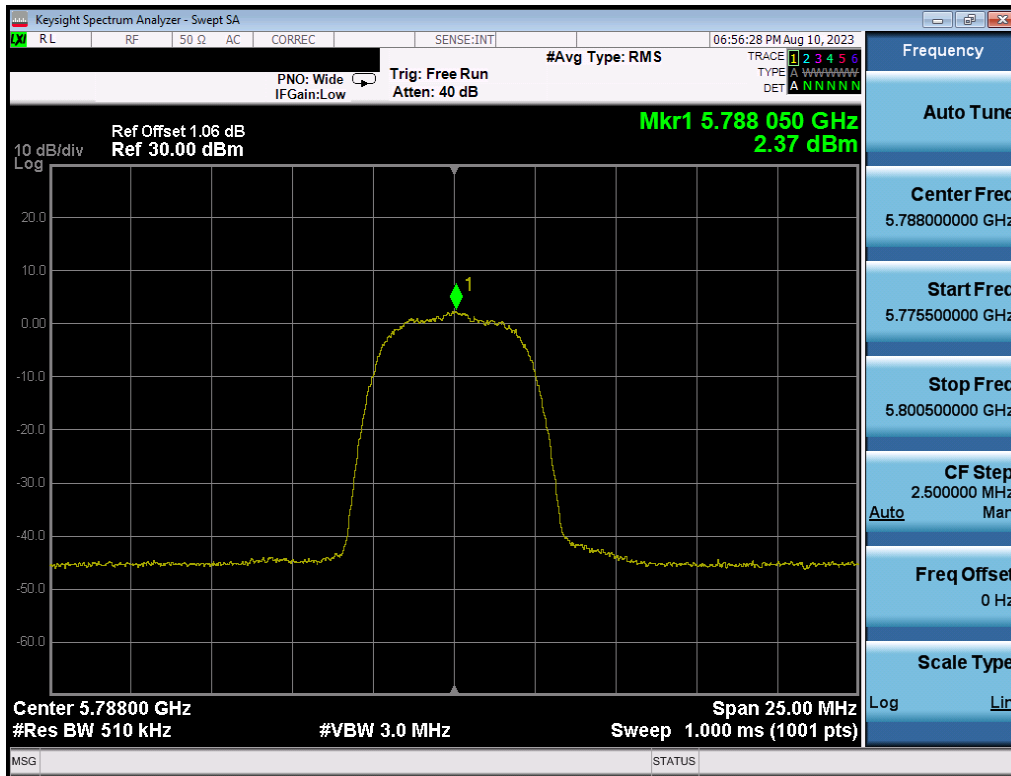


Plot 7-41. PSD (HDR8, 5788MHz)

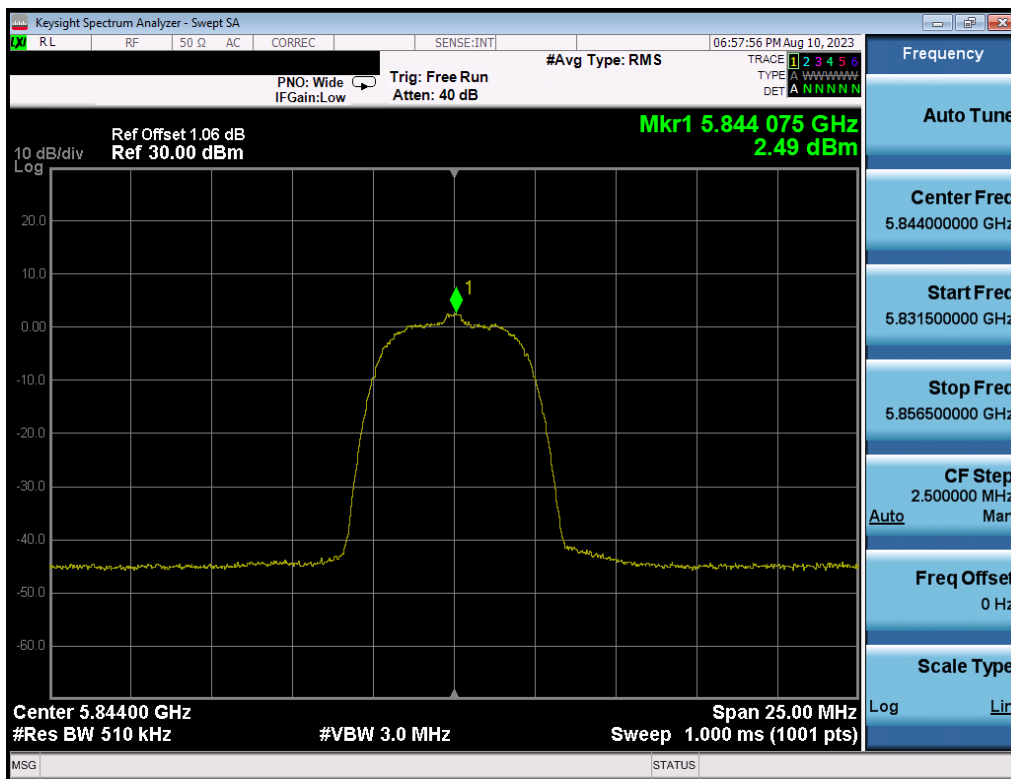


Plot 7-42. PSD (HDR8, 5844MHz)

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 43 of 72

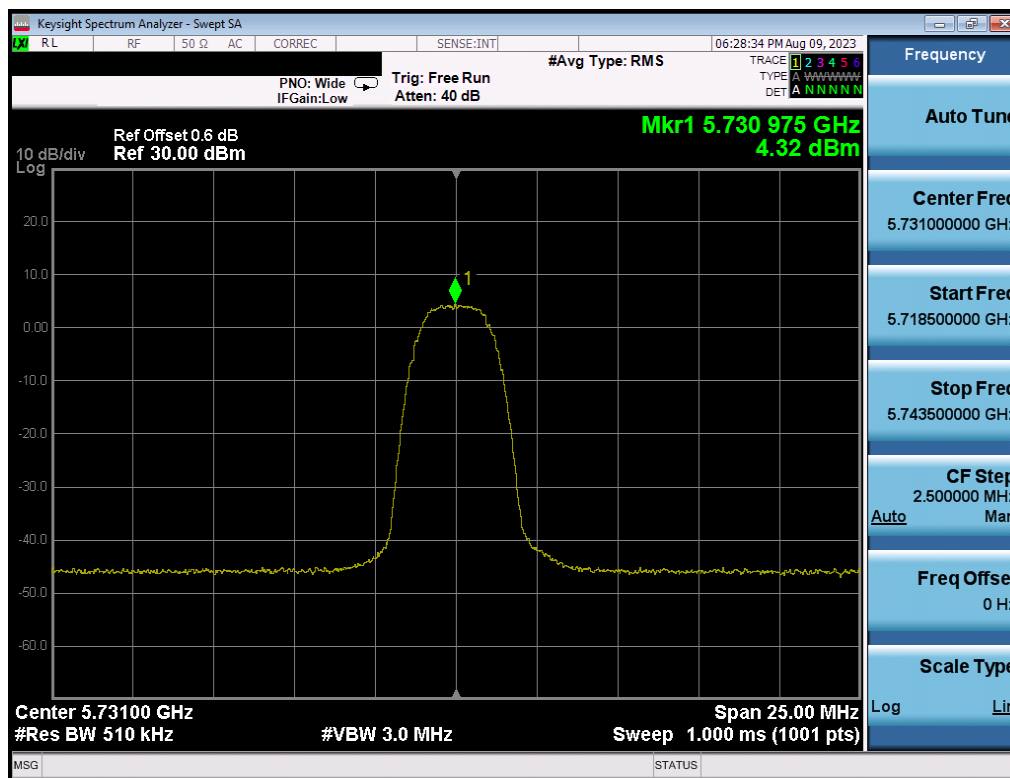


Plot 7-43. PSD (HDRp4, 5731MHz)

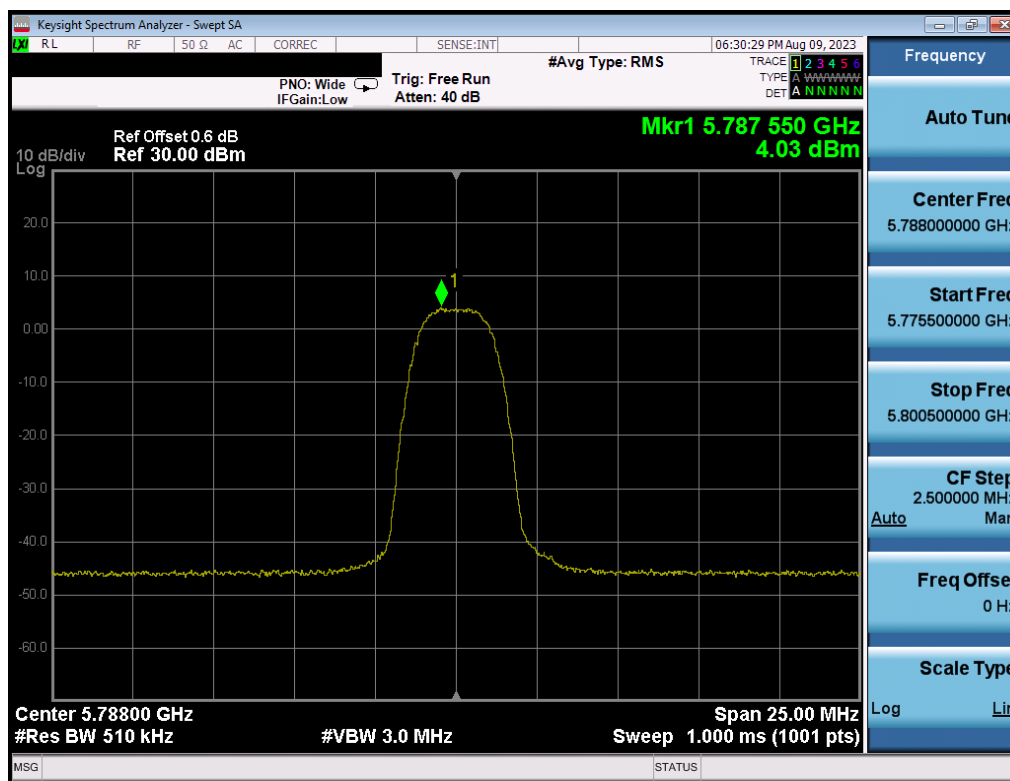


Plot 7-44. PSD (HDRp4, 5788MHz)

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 44 of 72

V 10.5 12/15/2021

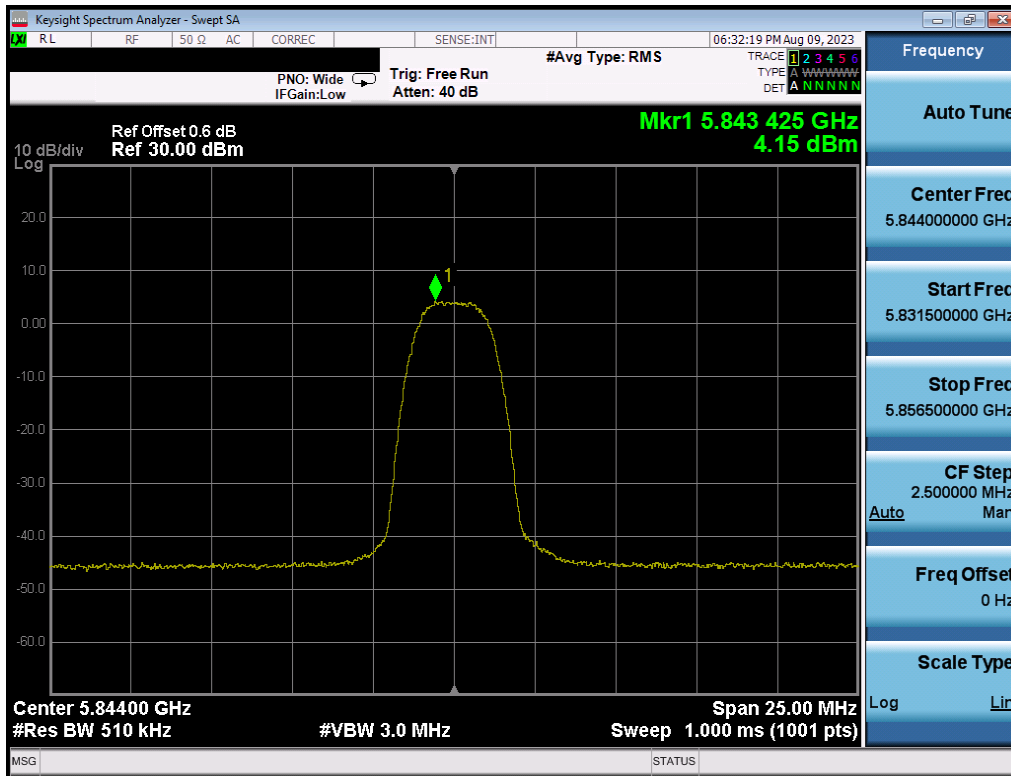

Plot 7-45. PSD (HDRp4, 5844MHz)

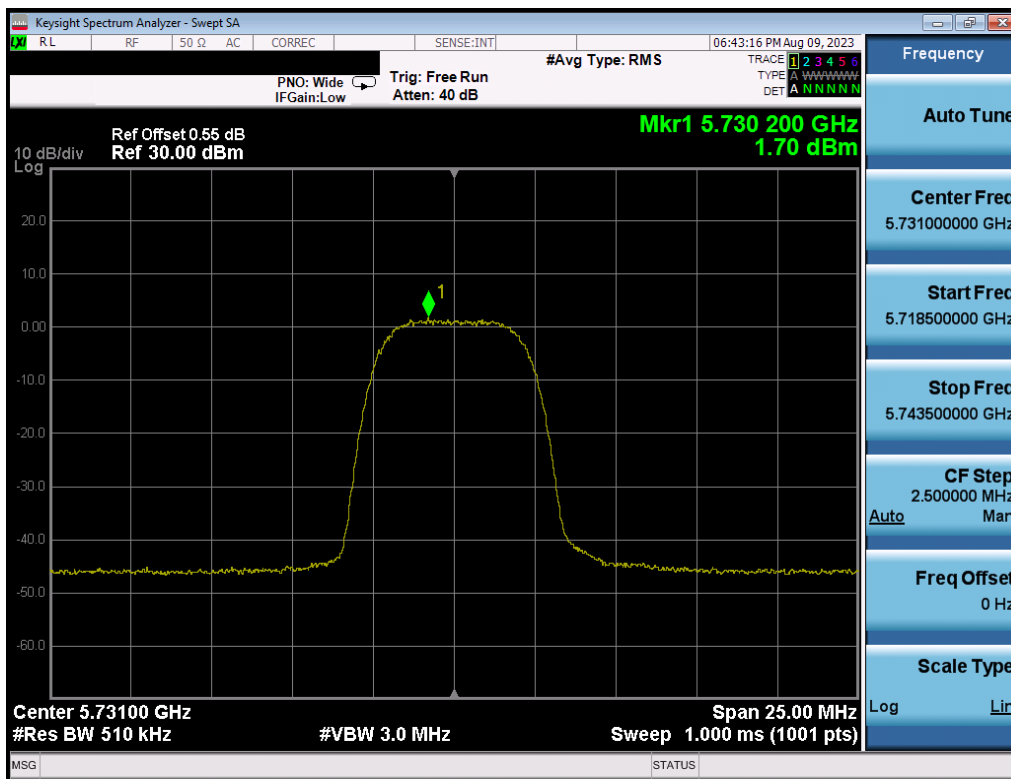


Plot 7-46. PSD (HDRp8, 5731MHz)


FCC ID: BCG-A3048			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud		Page 45 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

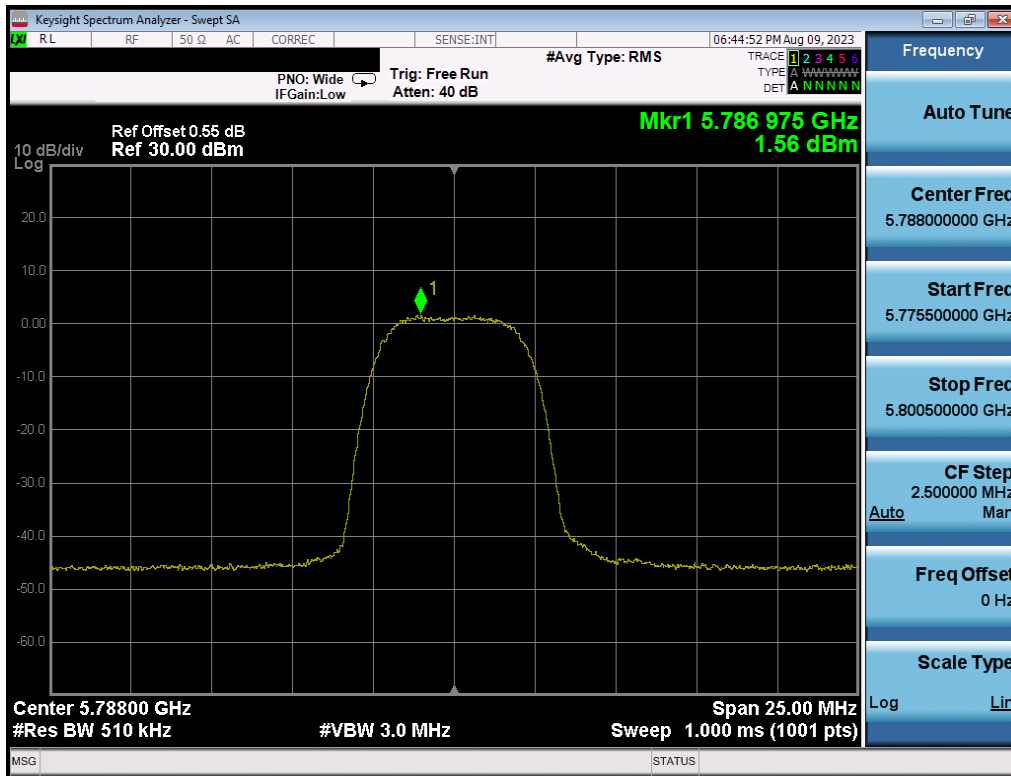

Plot 7-47. PSD (HDRp8, 5788MHz)

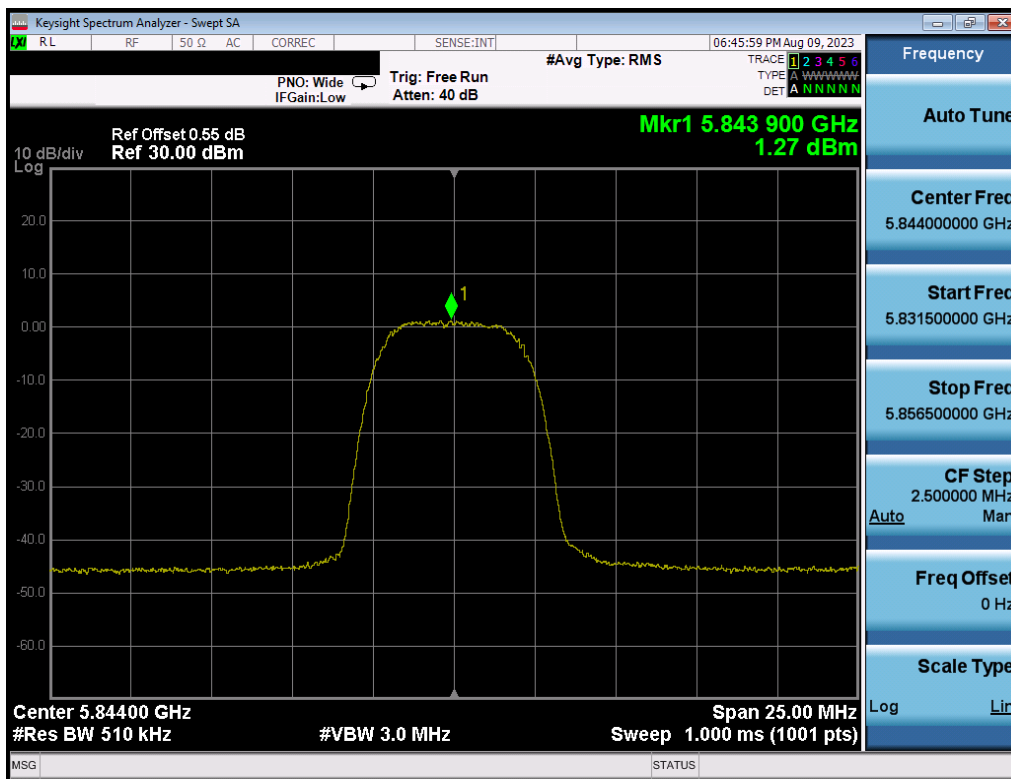

Plot 7-48. PSD (HDRp8, 5844MHz)

FCC ID: BCG-A3048			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud		Page 46 of 72

V 10.5 12/15/2021

7.6 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels and data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-7 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-7. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5

KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 47 of 72

V 10.5 12/15/2021

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

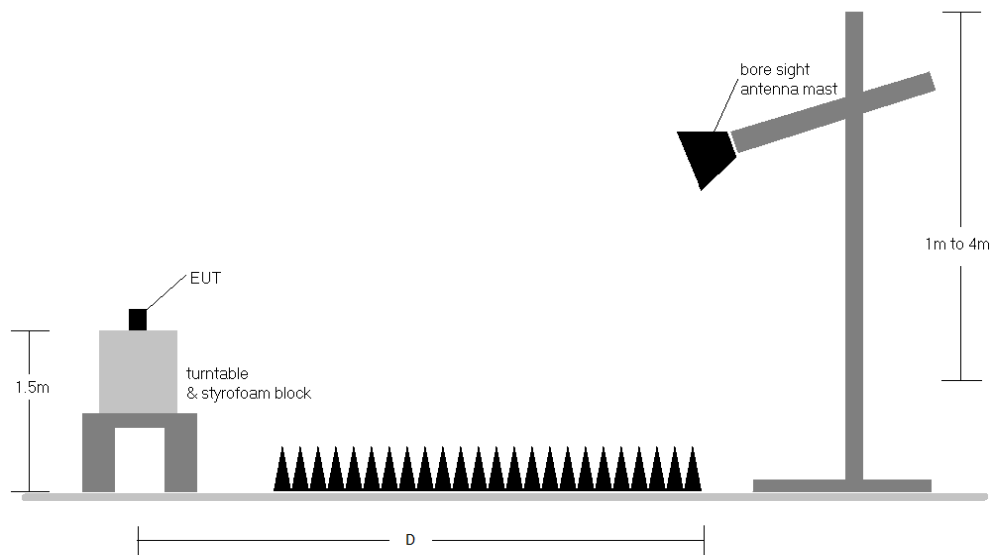


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 48 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-7.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-7. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The unit was tested with all possible modes and only the highest emission is reported.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.2 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 49 of 72

V 10.5 12/15/2021

7.6.1 Radiated Spurious Emission (1-18GHz)

§15.407(b) §15.205 §15.209

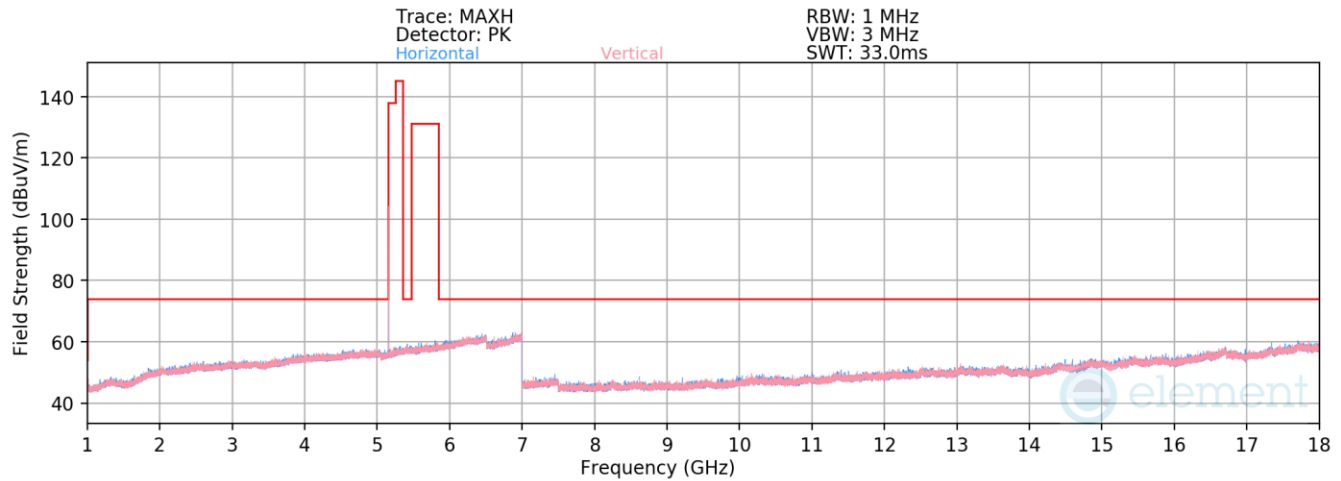

Plot 7-49. Radiated Spurious Emissions 1-18GHz (HDR4 – 5157MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5157MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10314.00	Peak	V	292	140	-70.60	12.60	0.00	49.00	68.23	-19.23
* 15471.00	Avg	H	109	120	-84.00	18.33	1.08	42.41	53.98	-11.57
* 15471.00	Peak	H	109	120	-72.86	18.33	0.00	52.47	73.98	-21.51

Table 7-8. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 50 of 72

V 10.5 12/15/2021

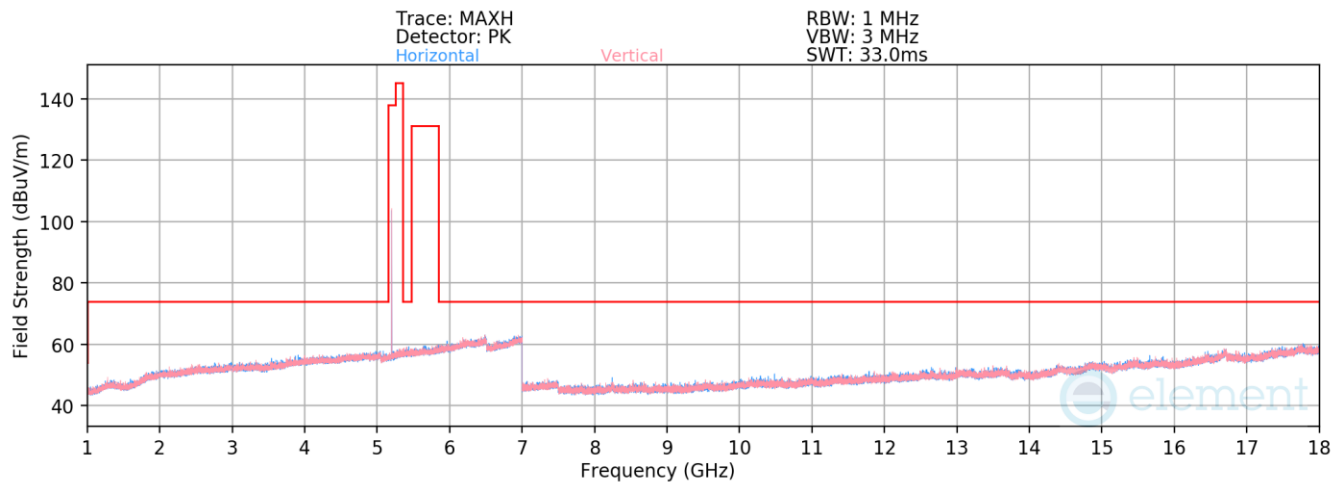

Plot 7-50. Radiated Spurious Emissions 1-18GHz (HDR4 – 5201MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5201MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10402.00	Peak	V	123	217	-70.21	12.49	49.28	68.23	-18.95
* 15603.00	Avg	H	-	-	-83.85	18.27	41.42	53.98	-12.56
* 15603.00	Peak	H	-	-	-72.71	18.27	52.56	73.98	-21.42

Table 7-9. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 51 of 72

V 10.5 12/15/2021

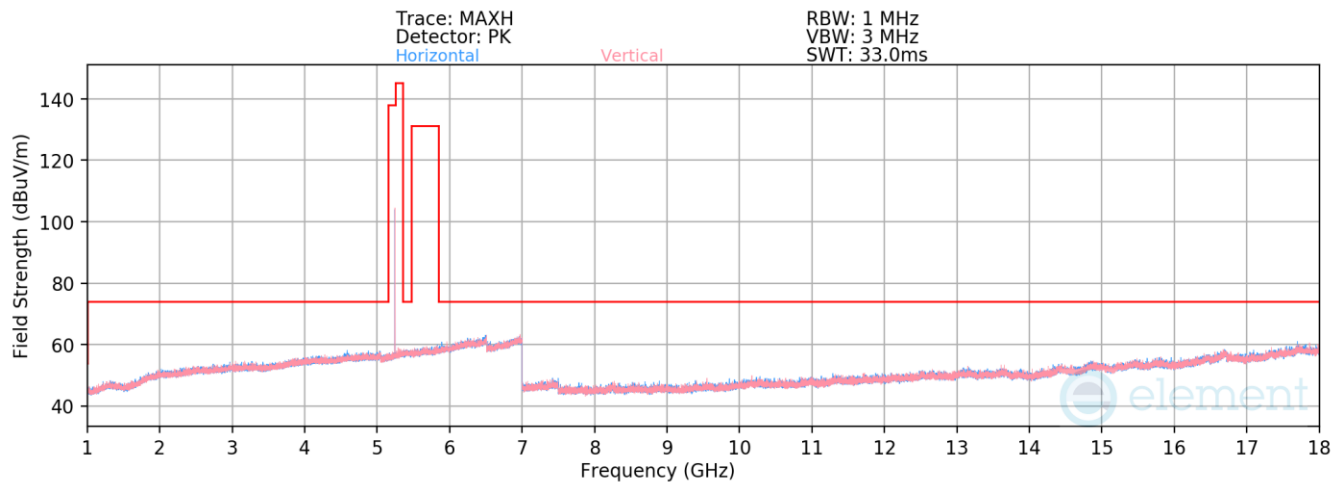

Plot 7-51. Radiated Spurious Emissions 1-18GHz (HDR4 – 5245MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	H	-	-	-70.91	12.68	48.77	68.23	-19.46
* 15735.00	Avg	H	-	-	-83.88	18.96	42.08	53.98	-11.90
* 15735.00	Peak	H	-	-	-71.87	18.96	54.09	73.98	-19.89

Table 7-10. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 52 of 72

V 10.5 12/15/2021

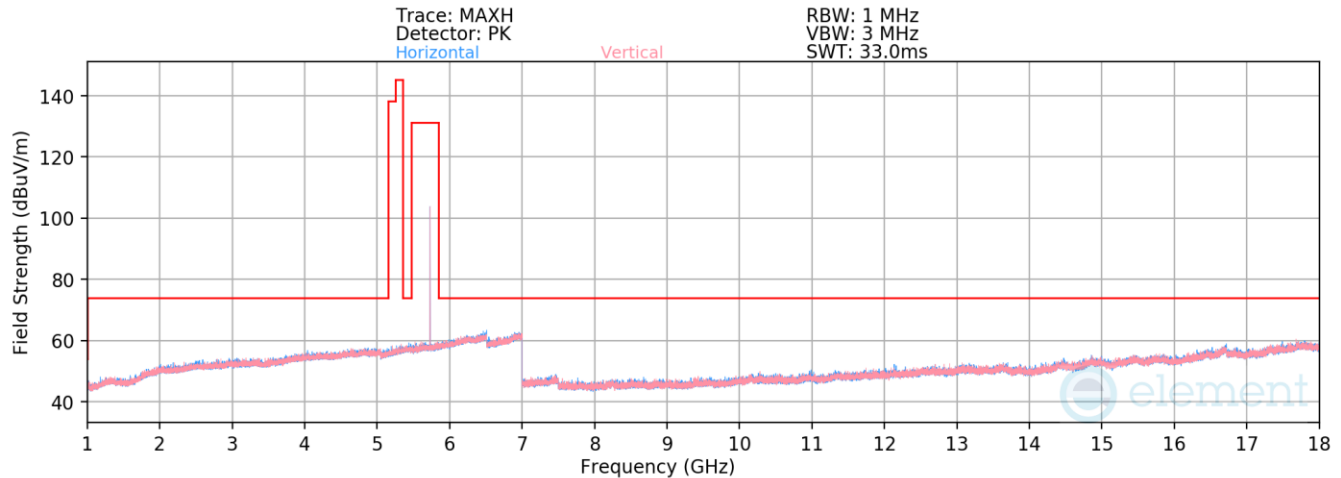

Plot 7-52. Radiated Spurious Emissions 1-18GHz (HDR4 – 5731MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11462.00	Avg	H	-	-	-82.87	13.30	37.43	53.98	-16.55
*	11462.00	Peak	H	-	-	-70.89	13.30	49.41	73.98	-24.57
	17193.00	Peak	H	-	-	-72.32	22.02	56.70	68.23	-11.53

Table 7-11. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 53 of 72

V 10.5 12/15/2021

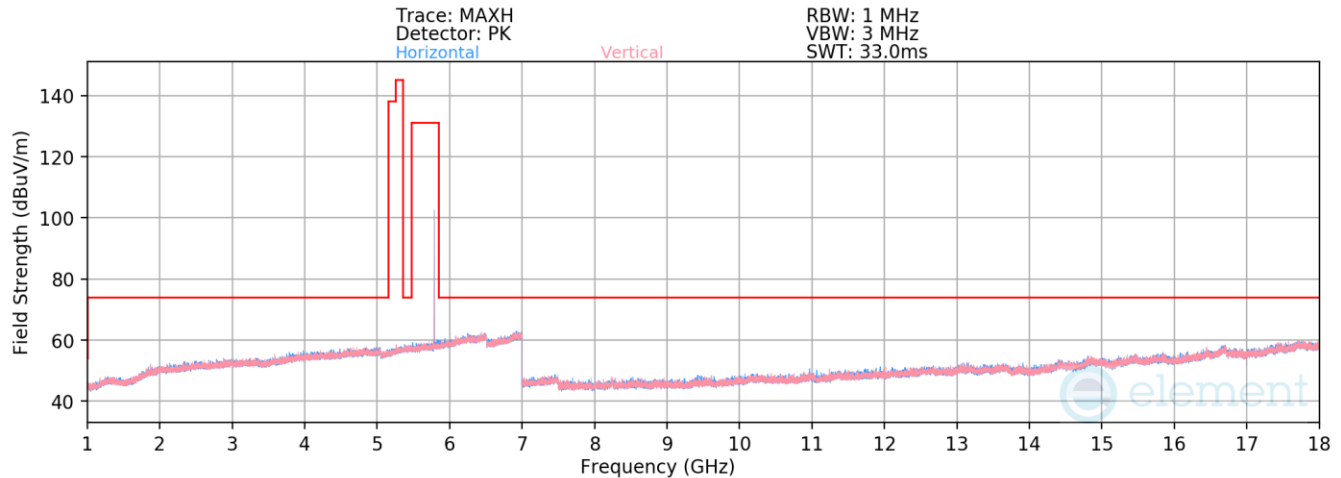

Plot 7-53. Radiated Spurious Emissions 1-18GHz (HDR4 – 5788MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5788MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11576.00	Avg	H	-	-	-83.21	13.44	37.23	53.98	-16.75
*	11576.00	Peak	H	-	-	-71.23	13.44	49.21	73.98	-24.77
	17364.00	Peak	H	-	-	-72.49	22.83	57.34	68.23	-10.89

Table 7-12. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 54 of 72

V 10.5 12/15/2021

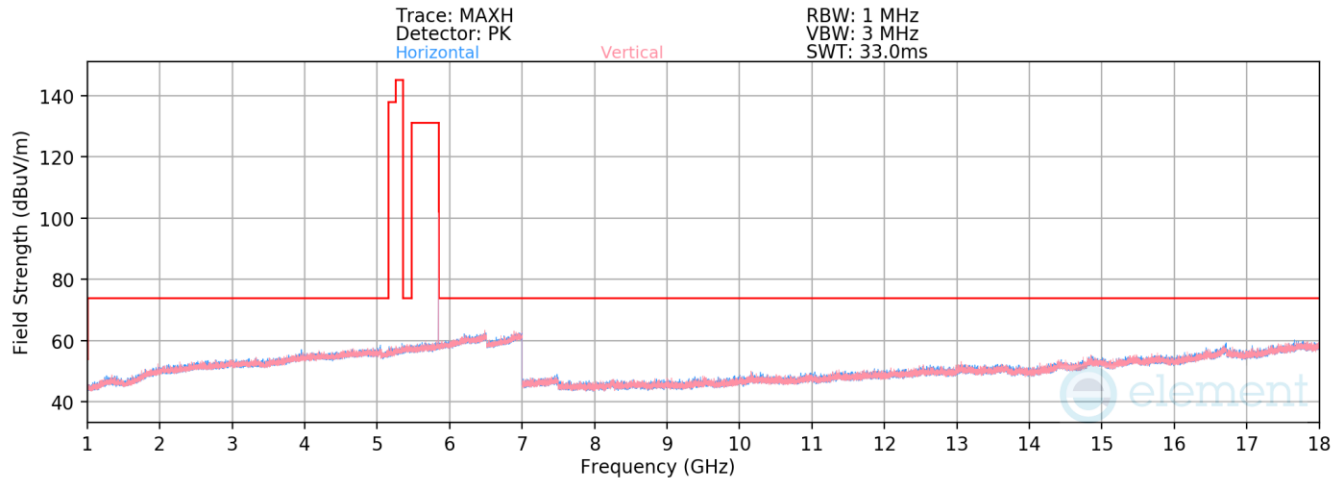

Plot 7-54. Radiated Spurious Emissions 1-18GHz (HDR4 – 5844MHz)


Mode: HDR4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5844MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11688.00	Avg	H	-	-	-82.96	13.74	37.78	53.98	-16.20
*	11688.00	Peak	H	-	-	-71.45	13.74	49.29	73.98	-24.69
	17532.00	Peak	H	-	-	-72.60	23.75	58.15	68.23	-10.08

Table 7-13. Radiated Spurious Emissions Measurements


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 55 of 72

V 10.5 12/15/2021

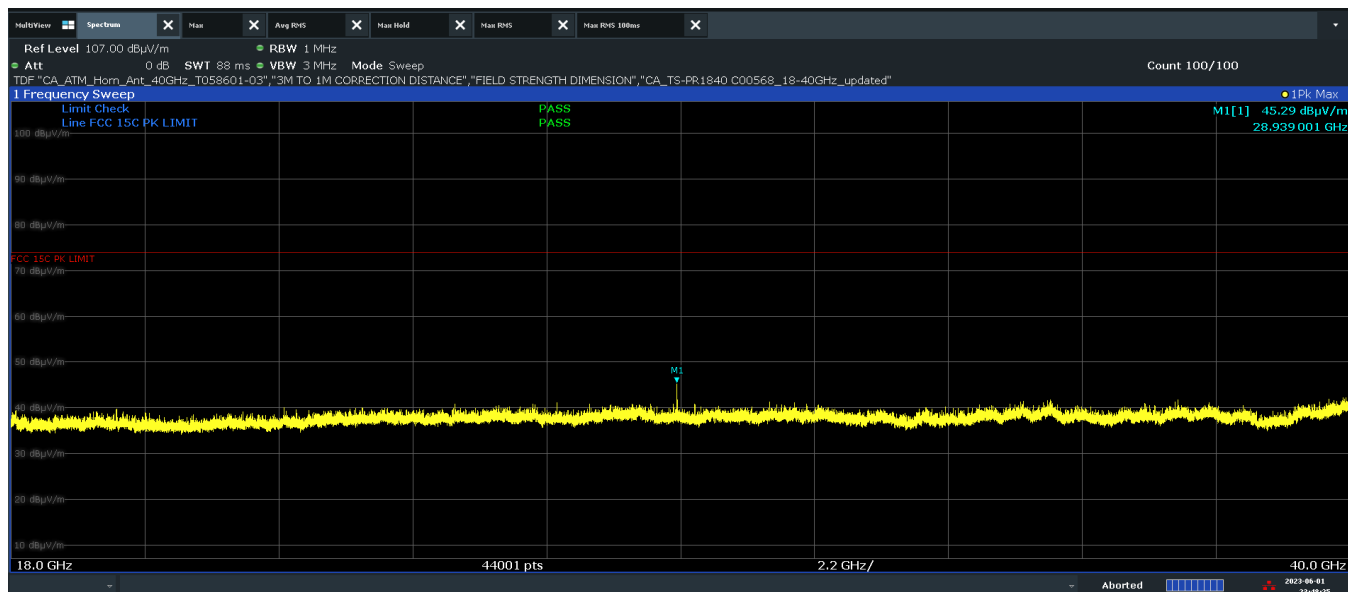

11:48:26 PM 06/01/2023

Plot 7-55. Radiated Spurious Emissions Above 18GHz (HDR4 – 5788MHz Pol. H)

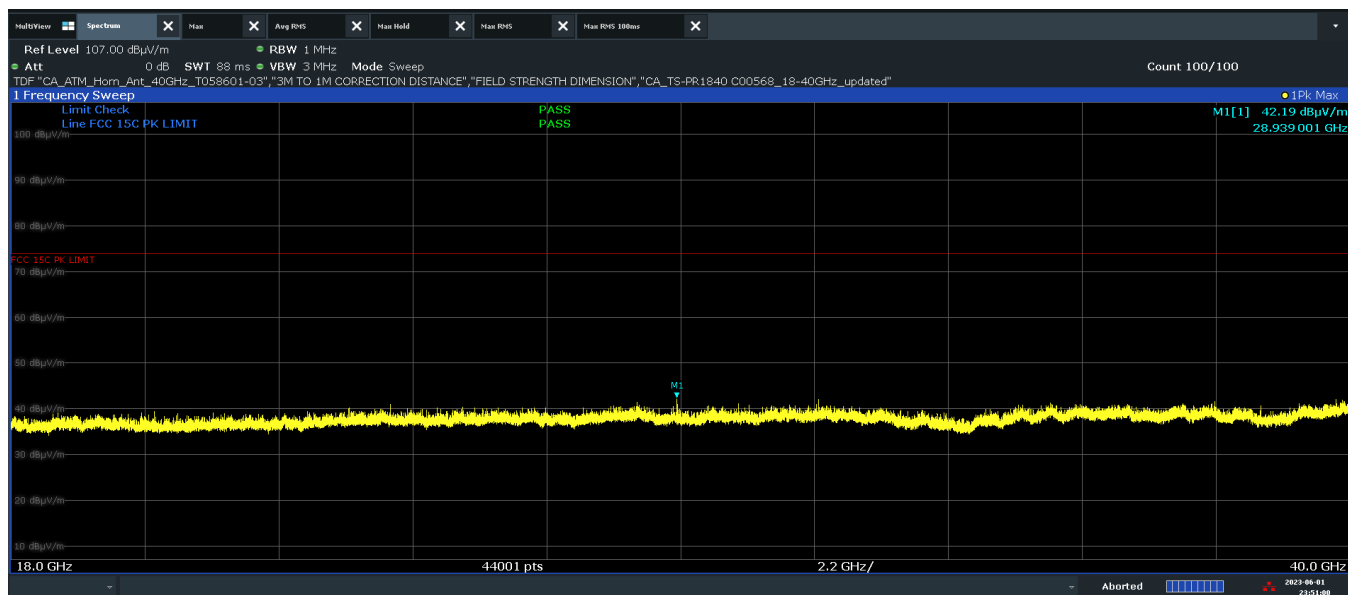

11:51:01 PM 06/01/2023

Plot 7-56. Radiated Spurious Emissions Above 18GHz (HDR4 – 5788MHz Pol. V)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Positioner [degree]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Corr. Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
28940.00	Peak	H	12	250	-48.15	-3.92	-9.54	45.39	68.23	-22.84

Table 7-14. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)						Approved by: Technical Manager		
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud						Page 56 of 72		

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.2 Radiated Band Edge Measurements

§15.407(b.1), §15.205 §15.209


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Mode: HDR4

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

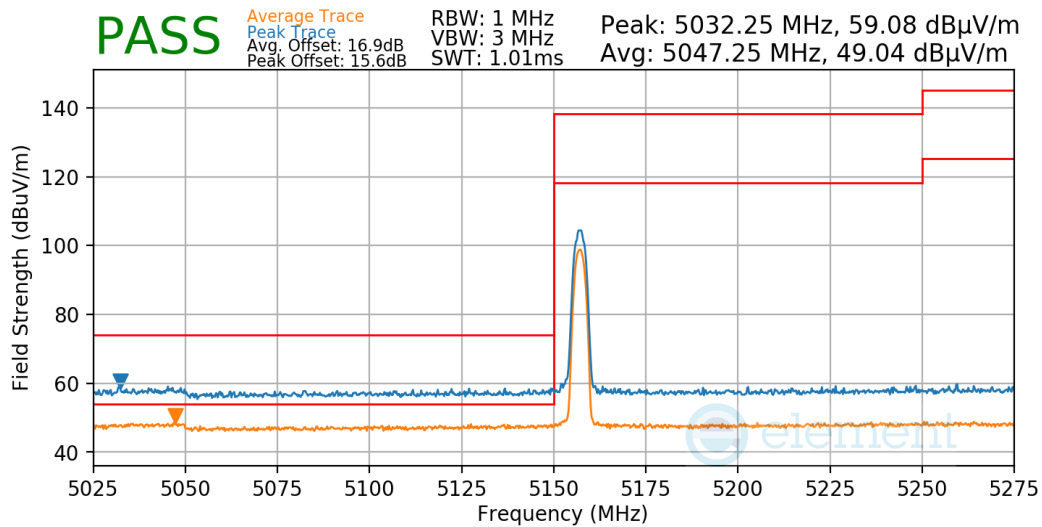

Plot 7-57. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 57 of 72

V 10.5 12/15/2021

Mode: HDR8

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

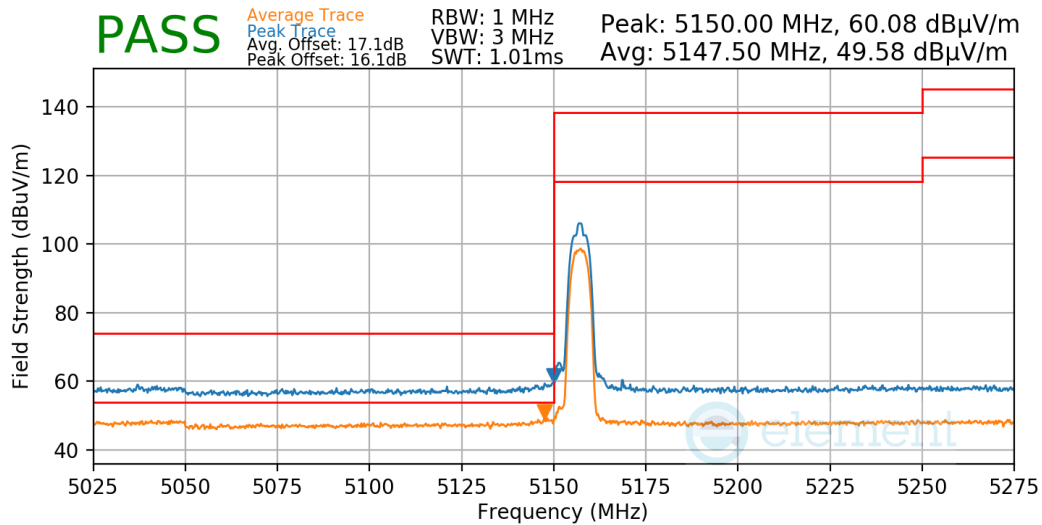


Plot 7-58. Radiated Lower Band Edge Measurement

Mode: HDRp4

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

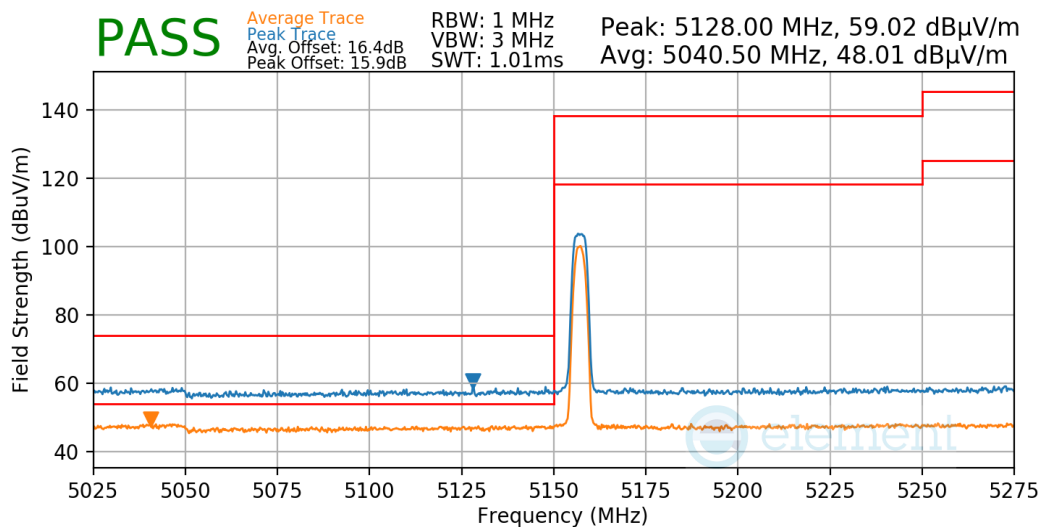

Plot 7-59. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 58 of 72

V 10.5 12/15/2021

Mode: HDRp8

Measurement Distance: 3 Meters

Operating Frequency: 5157MHz

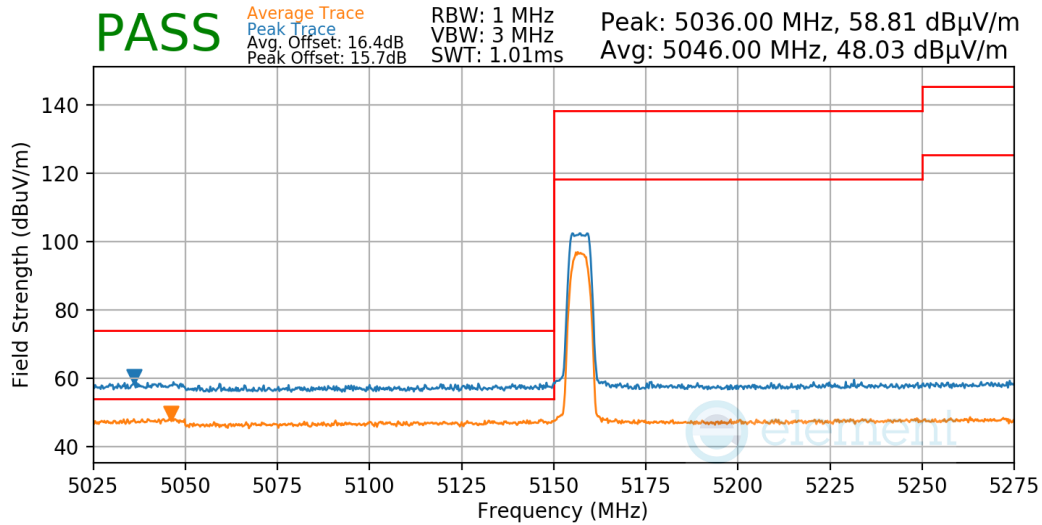


Plot 7-60. Radiated Lower Band Edge Measurement

Mode: HDR4

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

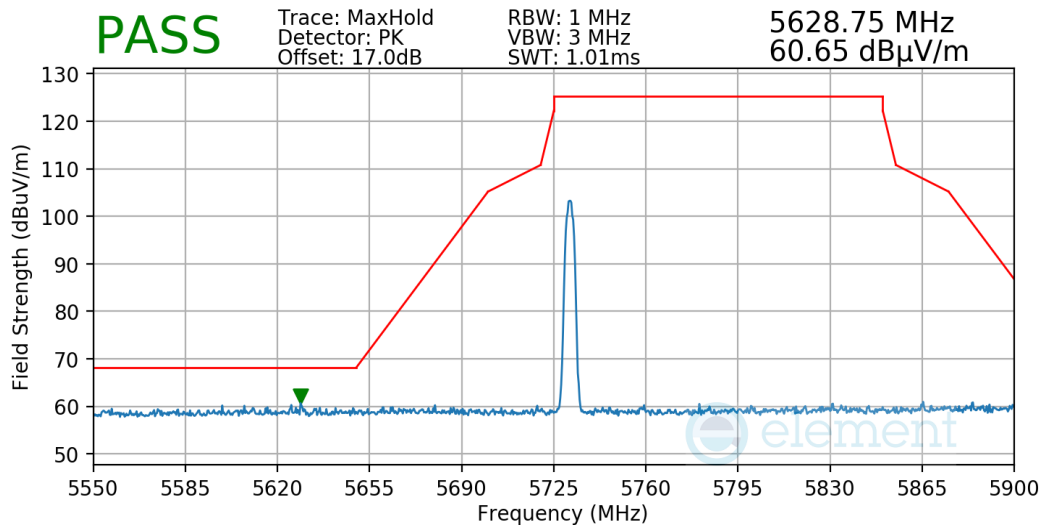

Plot 7-61. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 59 of 72

V 10.5 12/15/2021

Mode: HDR8

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

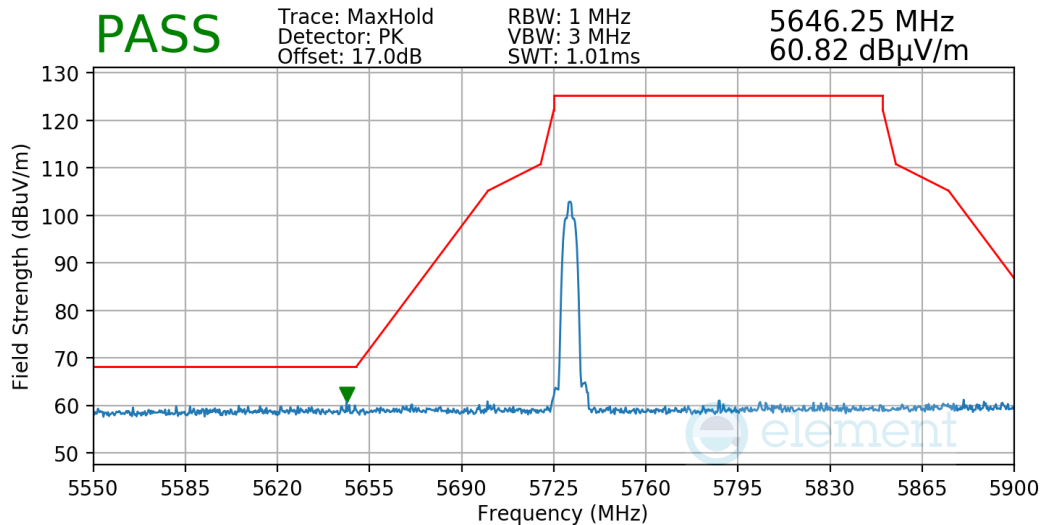


Plot 7-62. Radiated Lower Band Edge Measurement

Mode: HDRp4

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

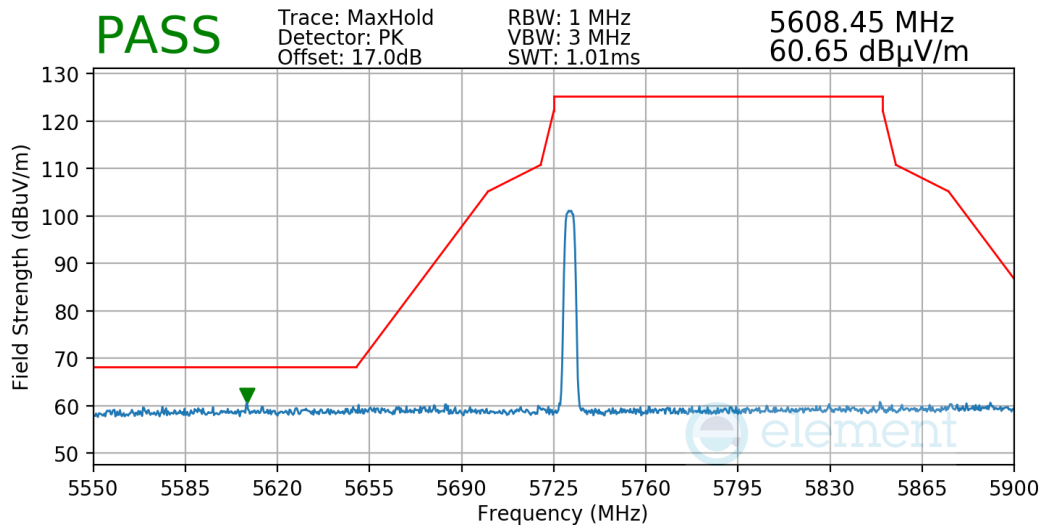

Plot 7-63. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 60 of 72

V 10.5 12/15/2021

Mode: HDRp8

Measurement Distance: 3 Meters

Operating Frequency: 5731MHz

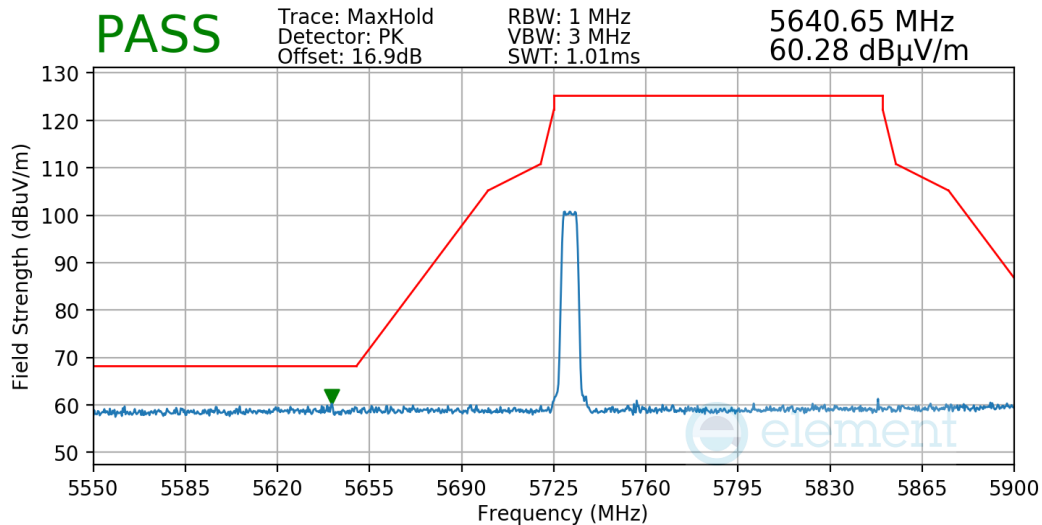


Plot 7-64. Radiated Lower Band Edge Measurement

Mode: HDR4

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

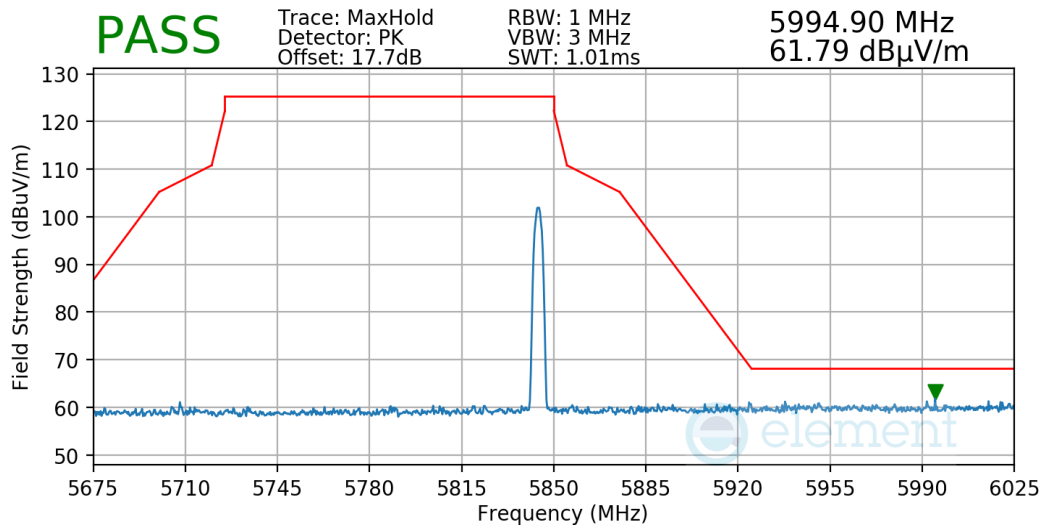

Plot 7-65. Radiated Upper Band Edge Measurement


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 61 of 72

V 10.5 12/15/2021

Mode: HDR8

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

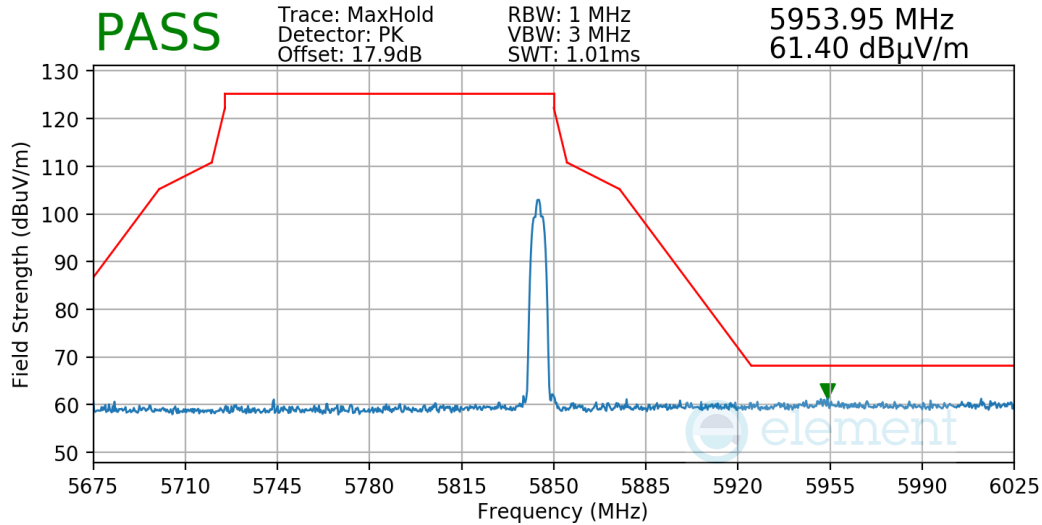


Plot 7-66. Radiated Upper Band Edge Measurement

Mode: HDRp4

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

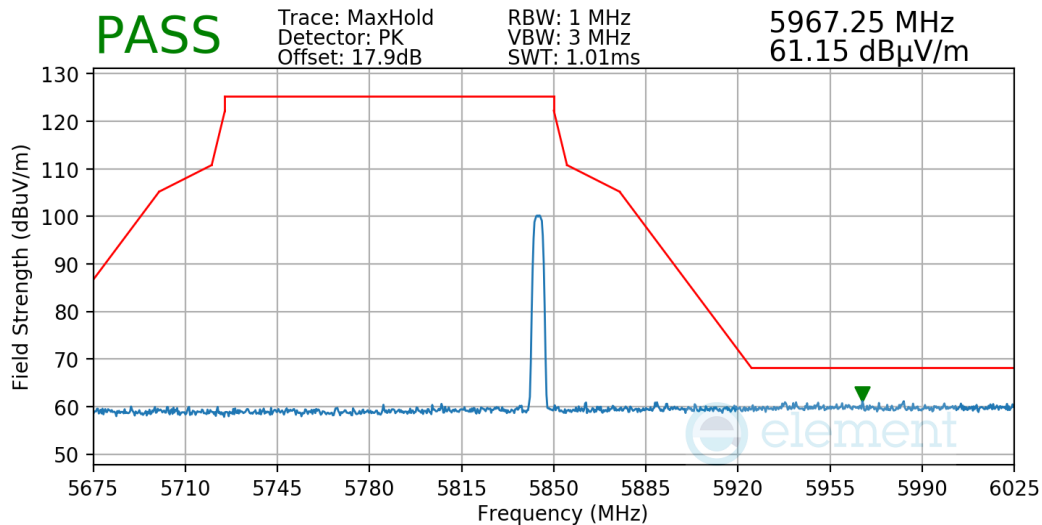

Plot 7-67. Radiated Upper Band Edge Measurement


FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 62 of 72

V 10.5 12/15/2021

Mode: HDRp8

Measurement Distance: 3 Meters

Operating Frequency: 5844MHz

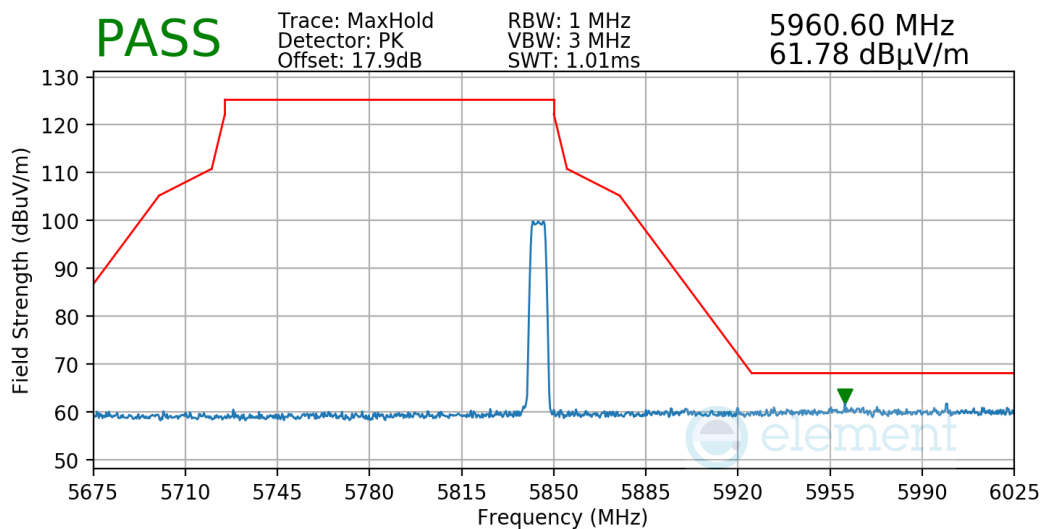

Plot 7-68. Radiated Upper Band Edge Measurement

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 63 of 72

V 10.5 12/15/2021

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-15 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-15. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 64 of 72

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

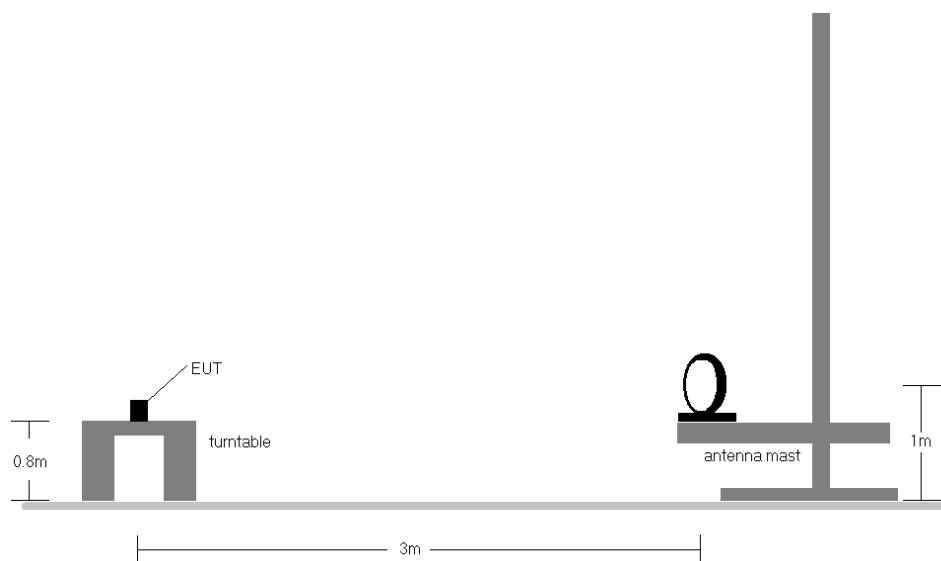


Figure 7-6. Radiated Test Setup < 30MHz

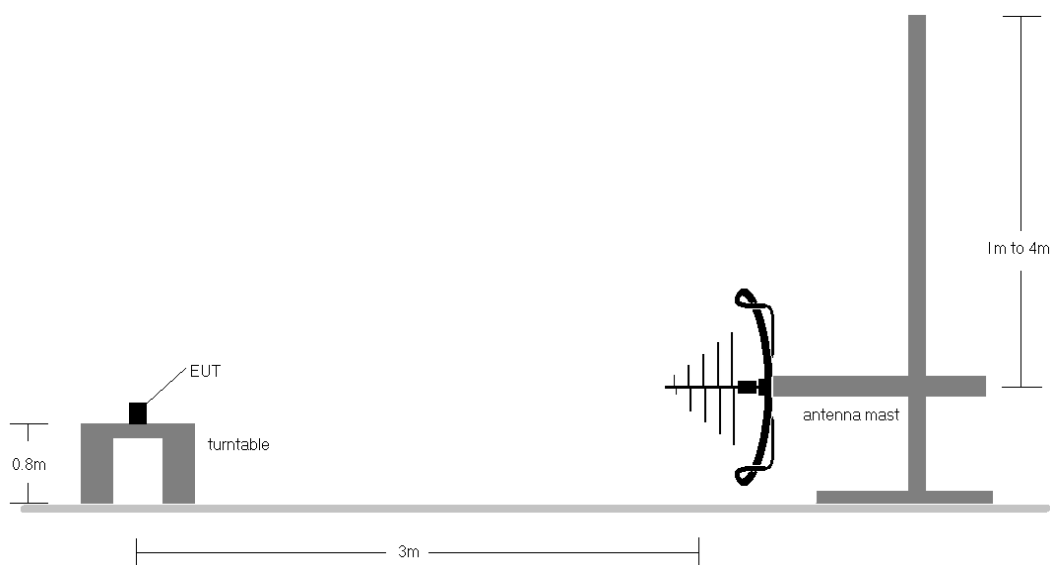


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 65 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-15.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with USB-C cable.
 - b. EUT charged by charging case and powered by host PC with USB-C cable.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 66 of 72

V 10.5 12/15/2021

Radiated Spurious Emissions Measurements (Below 1GHz)

S15.209

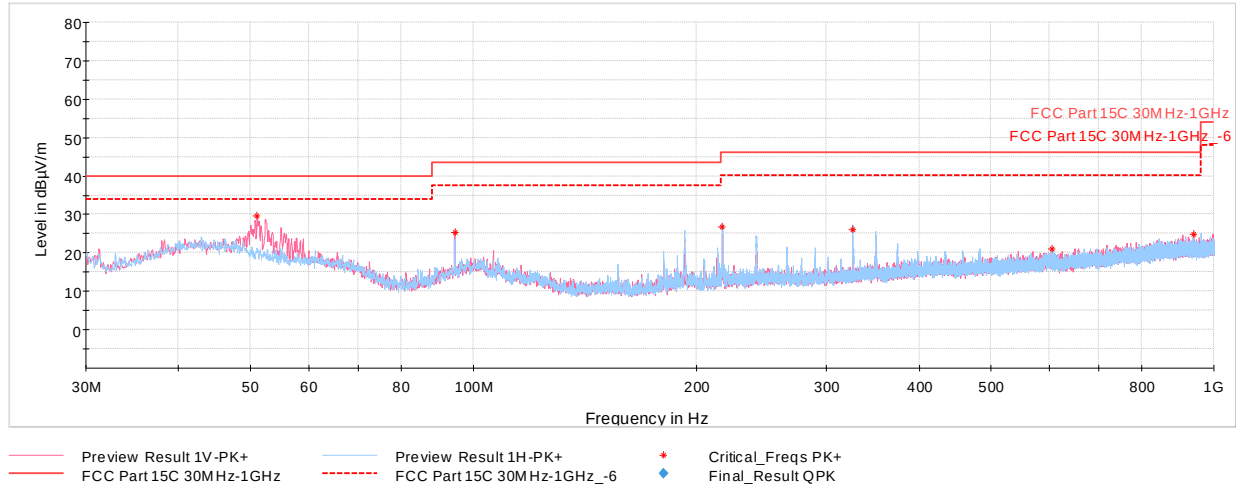

Plot 7-69. Radiated Spurious Emissions 30MHz - 1GHz (HDR4 – 5788MHz), with AC/DC Adapter and USB-C cable

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
51.10	Max Peak	V	100	263	-61.83	-15.64	29.53	40.00	-10.47
94.46	Max Peak	V	100	197	-62.71	-18.86	25.43	43.52	-18.09
216.97	Max Peak	H	100	97	-62.60	-17.71	26.69	46.02	-19.33
325.71	Max Peak	H	100	147	-66.27	-14.65	26.08	46.02	-19.94
604.24	Max Peak	H	100	92	-77.55	-8.50	20.95	46.02	-25.07
939.42	Max Peak	V	100	143	-78.12	-4.14	24.74	46.02	-21.28

Table 7-16. Radiated Spurious Emissions 30MHz – 1GHz (HDR4 – 5788MHz), with AC/DC Adapter and USB-C cable

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 67 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8 AC Line-Conducted Emissions Measurement

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-17. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A3048	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 68 of 72

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

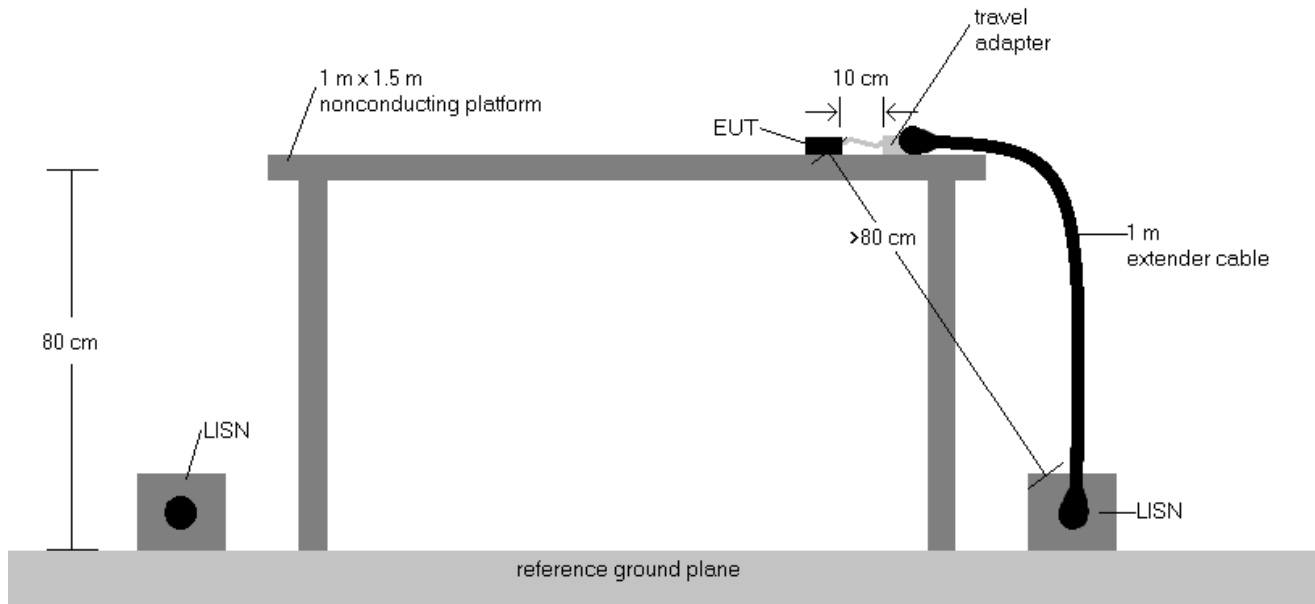



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with USB-C cable.
 - b. EUT charged by charging case and powered by host PC with USB-C cable.
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 69 of 72

V 10.5 12/15/2021

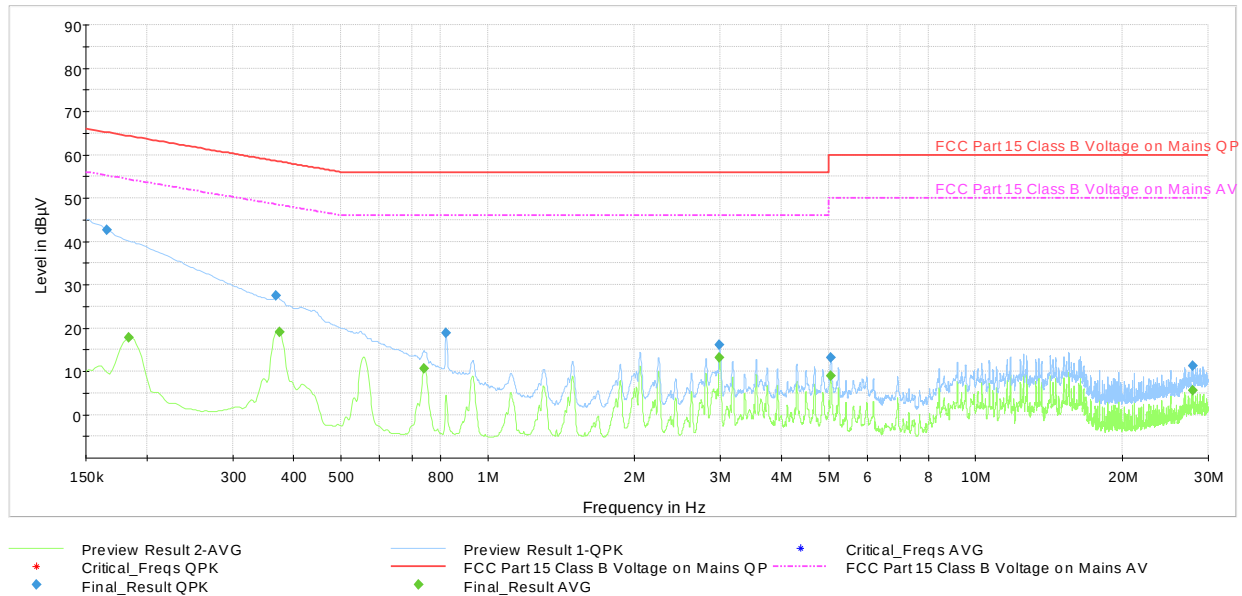

Plot 7-70. AC Line Conducted Plot (HDR4 – 5788MHz) (L1) with host PC and USB-C cable


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	42.7	—	65.17	-22.51	L1	GND
0.184	FINAL	—	17.73	54.31	-36.59	L1	GND
0.368	FINAL	27.5	—	58.54	-31.07	L1	GND
0.375	FINAL	—	19.07	48.39	-29.32	L1	GND
0.742	FINAL	—	10.57	46.00	-35.43	L1	GND
0.821	FINAL	18.9	—	56.00	-37.08	L1	GND
2.987	FINAL	16.2	—	56.00	-39.83	L1	GND
2.987	FINAL	—	13.17	46.00	-32.83	L1	GND
5.046	FINAL	—	9.00	50.00	-41.00	L1	GND
5.053	FINAL	13.3	—	60.00	-46.74	L1	GND
27.888	FINAL	11.2	—	60.00	-48.83	L1	GND
27.893	FINAL	—	5.62	50.00	-44.38	L1	GND

Table 7-18. AC Line Conducted Data (HDR4 – 5788MHz) (L1) with host PC and USB-C cable

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 70 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

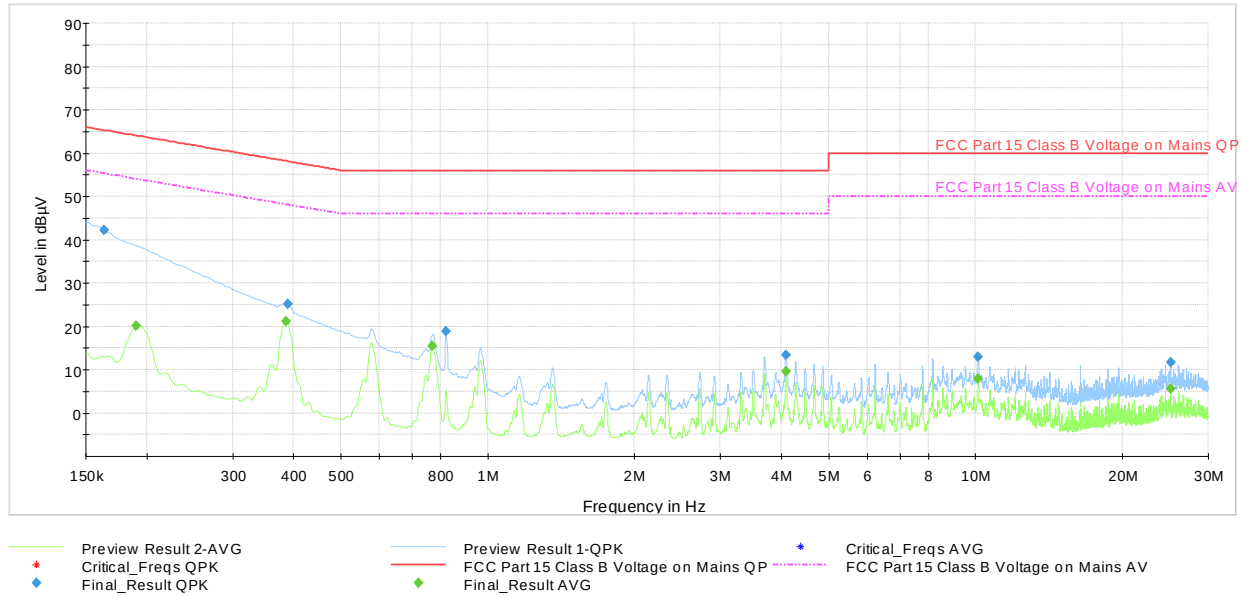

Plot 7-71. AC Line Conducted Plot (HDR4 – 5788MHz) (N) with host PC and USB-C cable

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	42.2	—	65.28	-23.06	N	GND
0.191	FINAL	—	20.18	54.02	-33.84	N	GND
0.386	FINAL	—	21.15	48.14	-27.00	N	GND
0.389	FINAL	25.1	—	58.10	-32.98	N	GND
0.771	FINAL	—	15.53	46.00	-30.47	N	GND
0.821	FINAL	18.8	—	56.00	-37.16	N	GND
4.081	FINAL	—	9.53	46.00	-36.47	N	GND
4.085	FINAL	13.5	—	56.00	-42.54	N	GND
10.115	FINAL	13.0	—	60.00	-47.00	N	GND
10.118	FINAL	—	7.88	50.00	-42.12	N	GND
25.087	FINAL	—	5.58	50.00	-44.42	N	GND
25.087	FINAL	11.6	—	60.00	-48.36	N	GND

Table 7-19. AC Line Conducted Data (HDR4 – 5788MHz) (N) with host PC and USB-C cable

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 71 of 72

V 10.5 12/15/2021

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Wireless Left Earbud FCC ID: BCG-A3048** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: BCG-A3048		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020011-08.BCG	Test Dates: 5/2/2023 – 8/10/2023	EUT Type: Wireless Earbud	Page 72 of 72

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.