



Plot 7-103. Extended Lower Band Edge Plot (NR Band n25 – 15MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

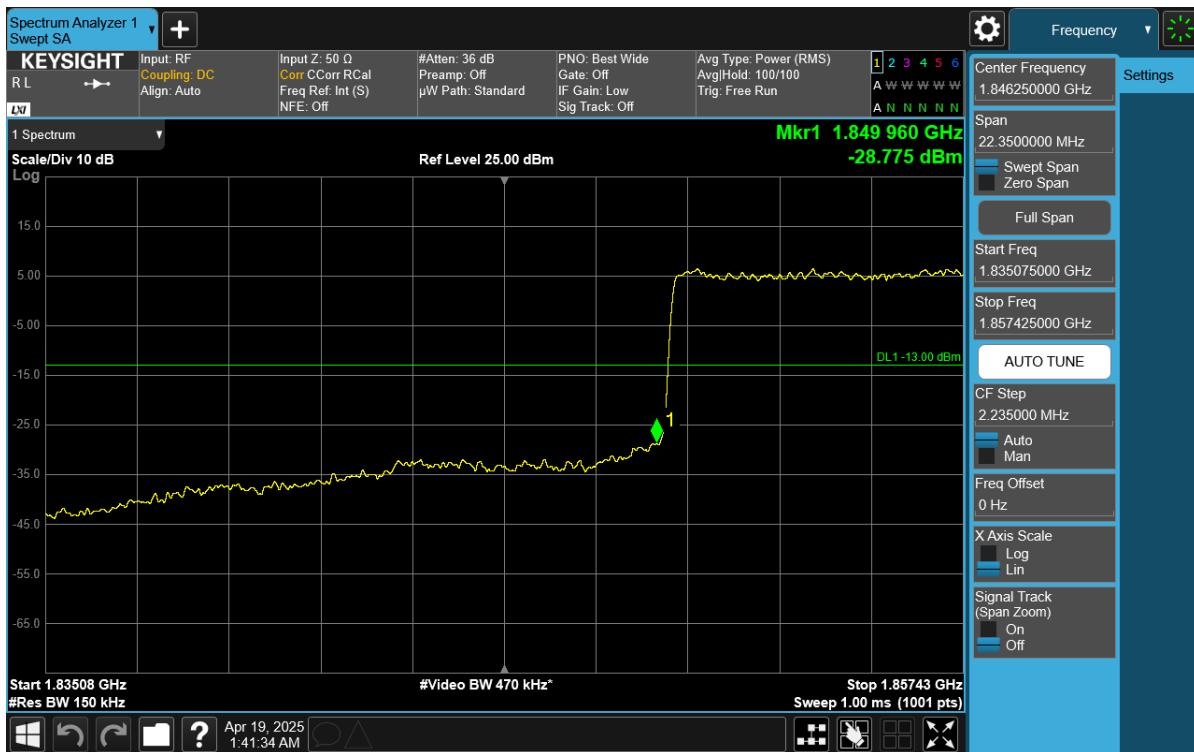


Plot 7-104. Lower Band Edge Plot (NR Band n25 – 15MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 72 of 131	

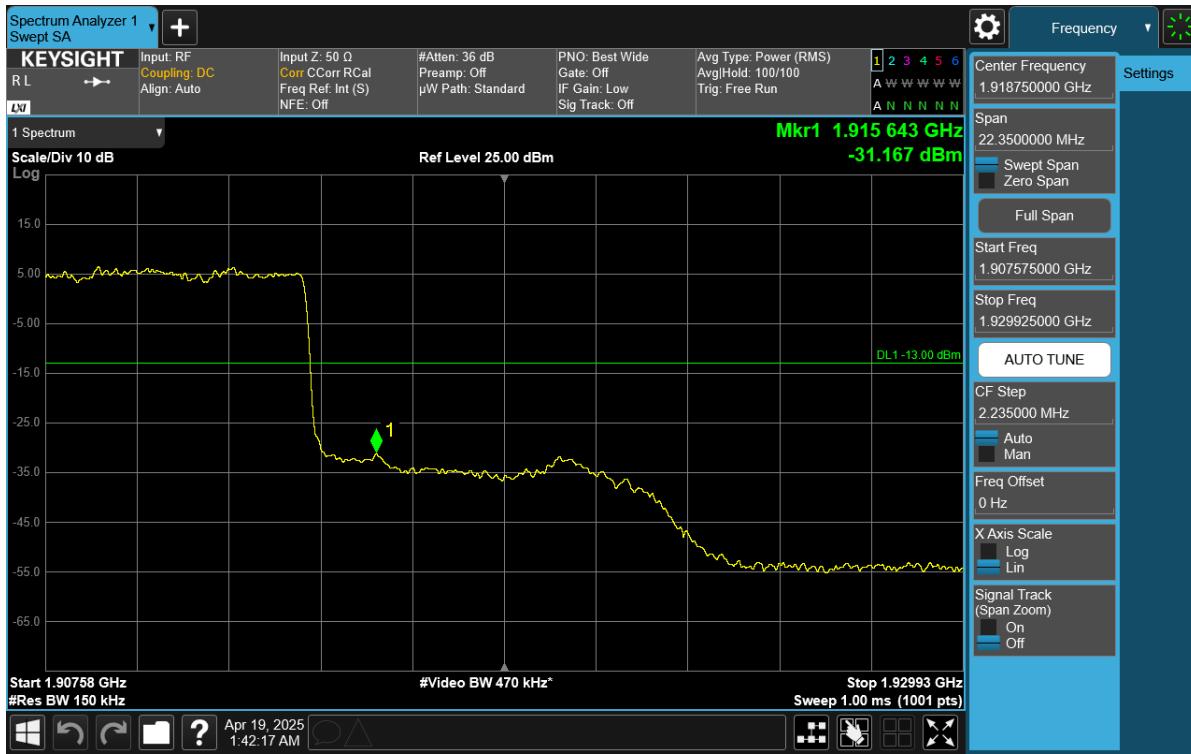


Plot 7-105. Upper Band Edge Plot (NR Band n25 – 15MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

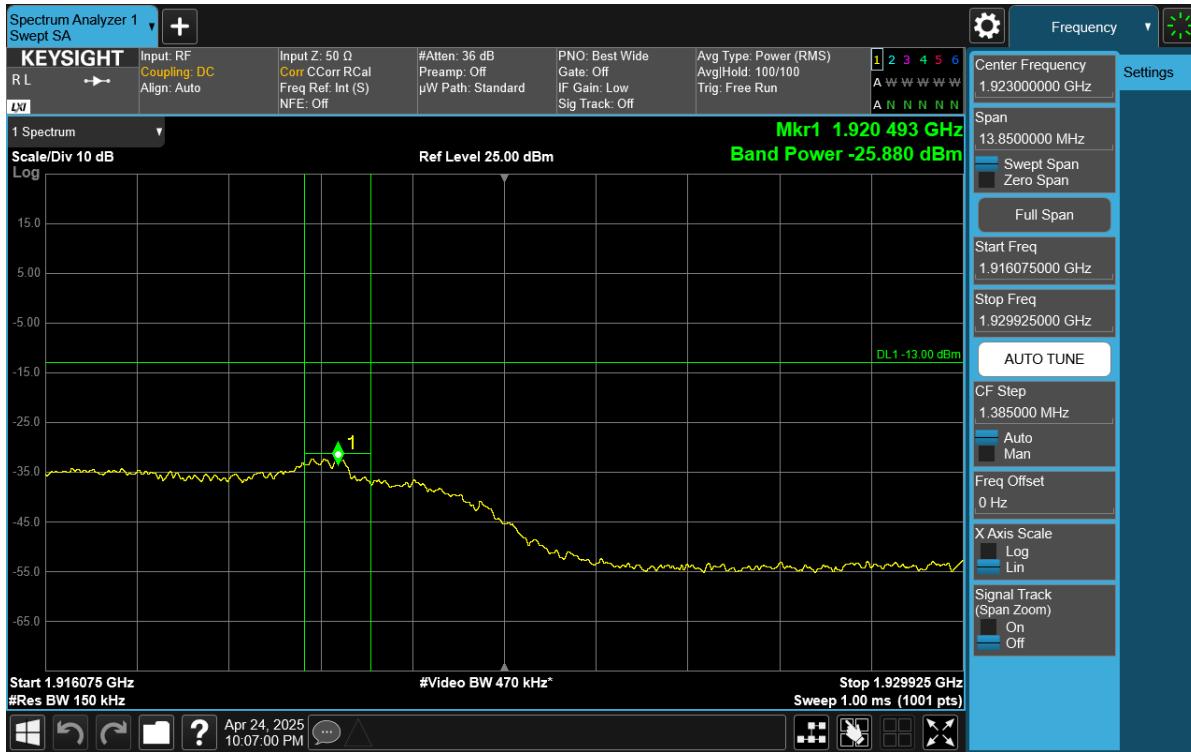


Plot 7-106. Extended Upper Band Edge Plot (NR Band n25 – 15MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 73 of 131	

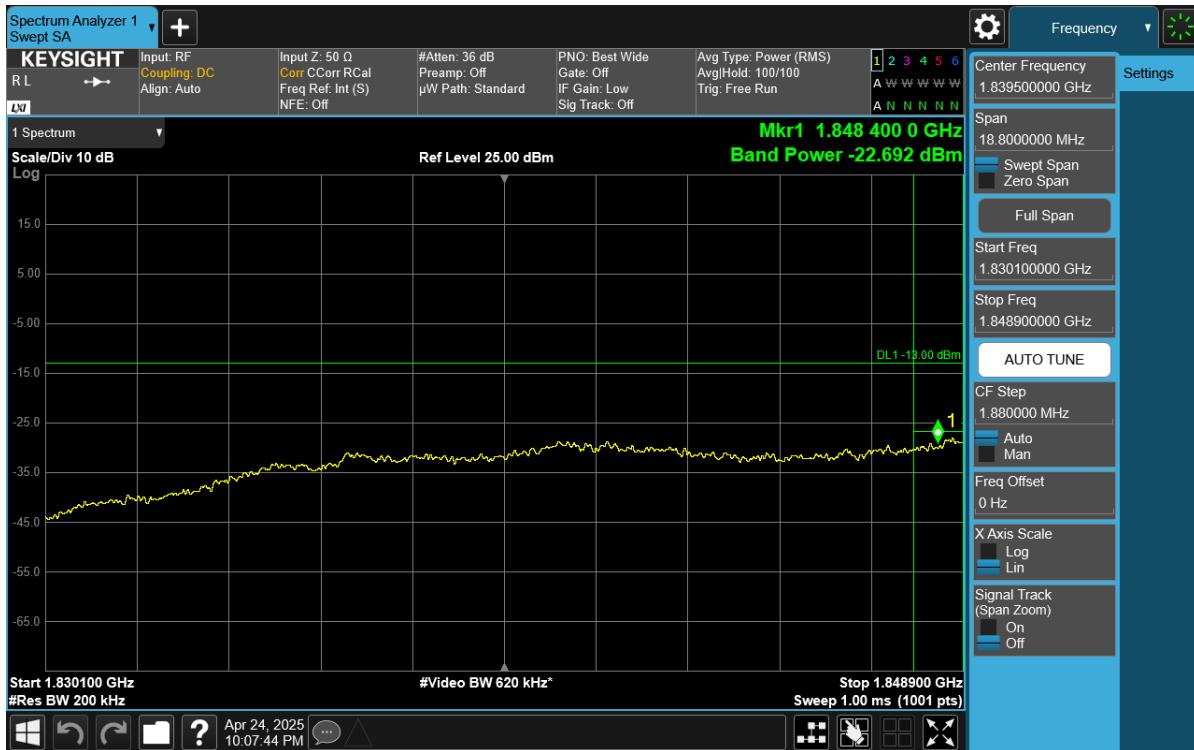


Plot 7-107. Extended Lower Band Edge Plot (NR Band n25 – 20MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

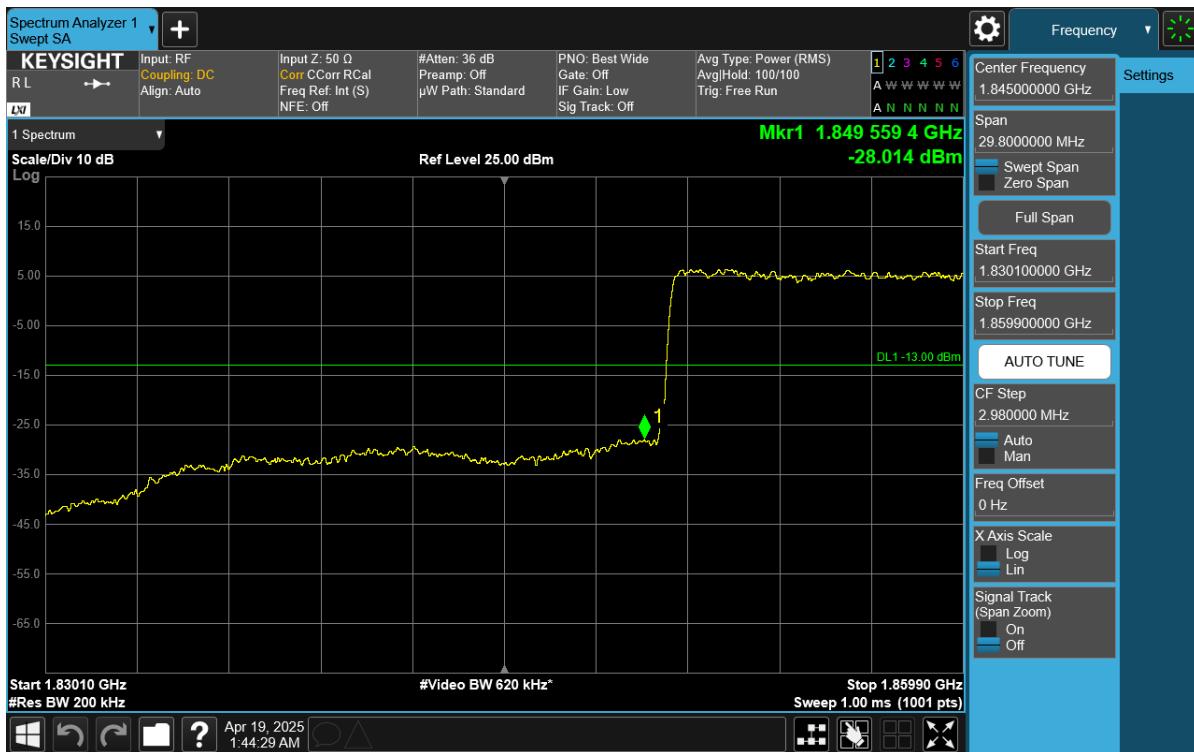


Plot 7-108. Lower Band Edge Plot (NR Band n25 – 20MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 74 of 131	

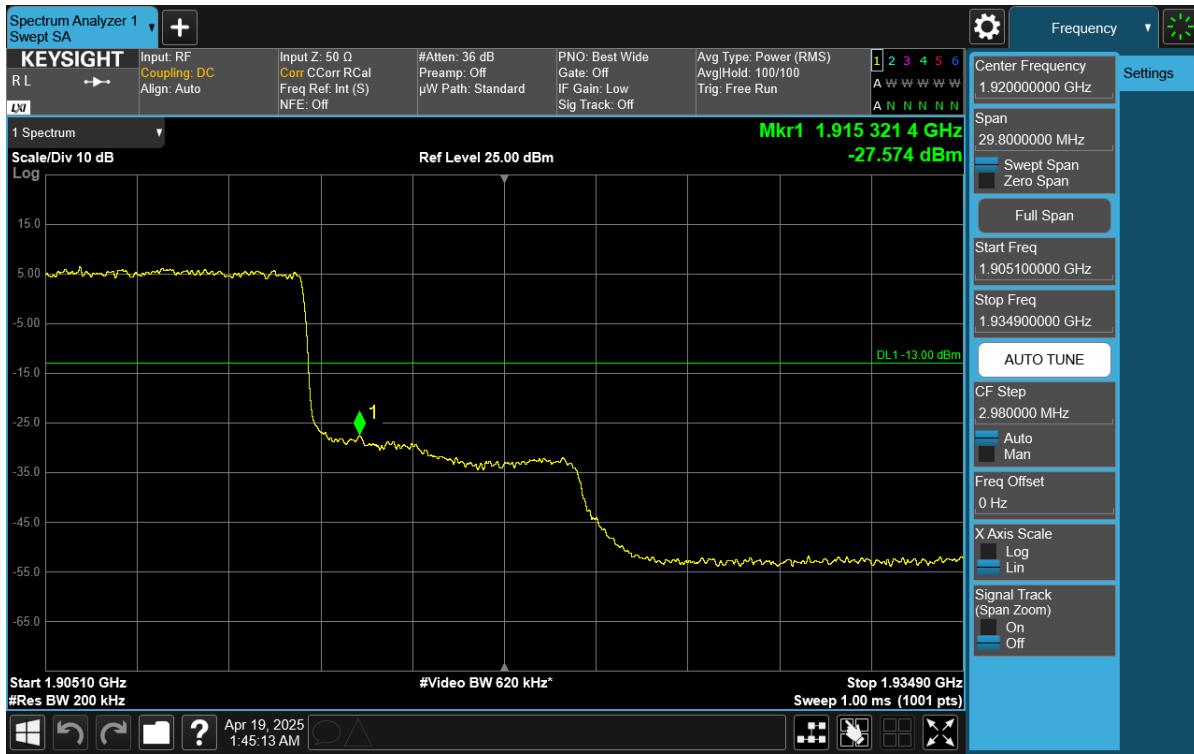


Plot 7-109. Upper Band Edge Plot (NR Band n25 – 20MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

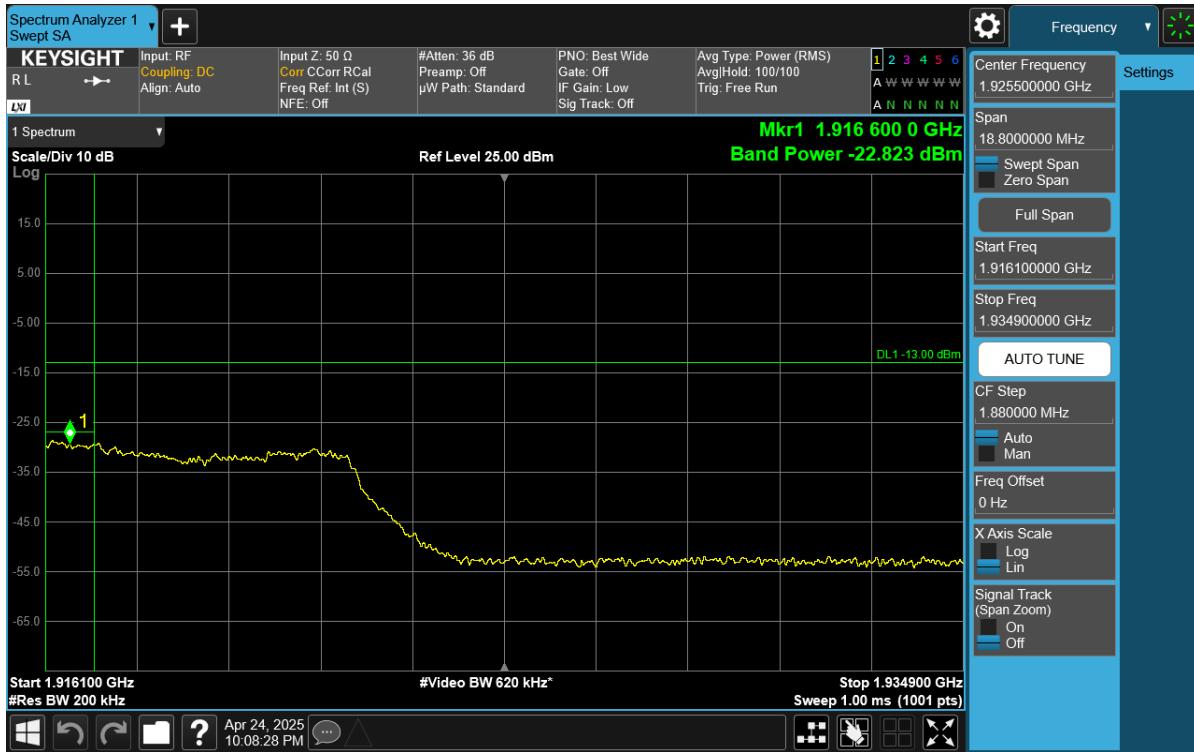


Plot 7-110. Extended Upper Band Edge Plot (NR Band n25 – 20MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 75 of 131	

NR Band n2

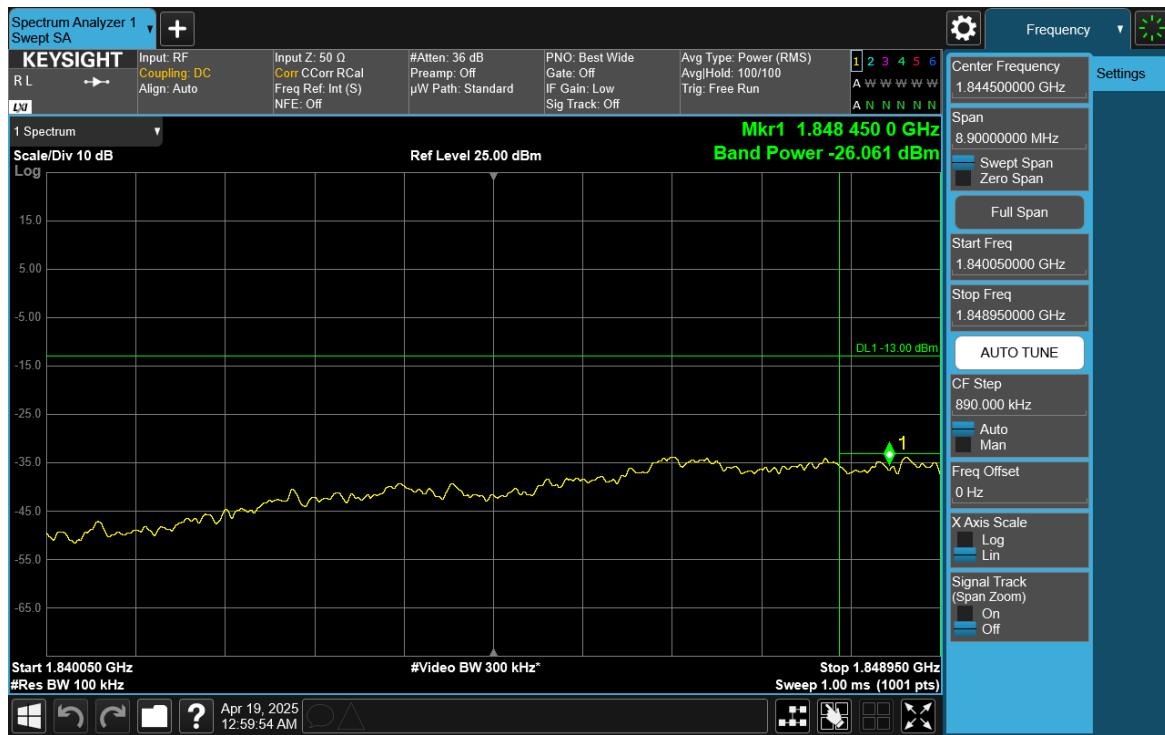

Plot 7-111. Extended Lower Band Edge Plot (NR Band n2 – 5MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

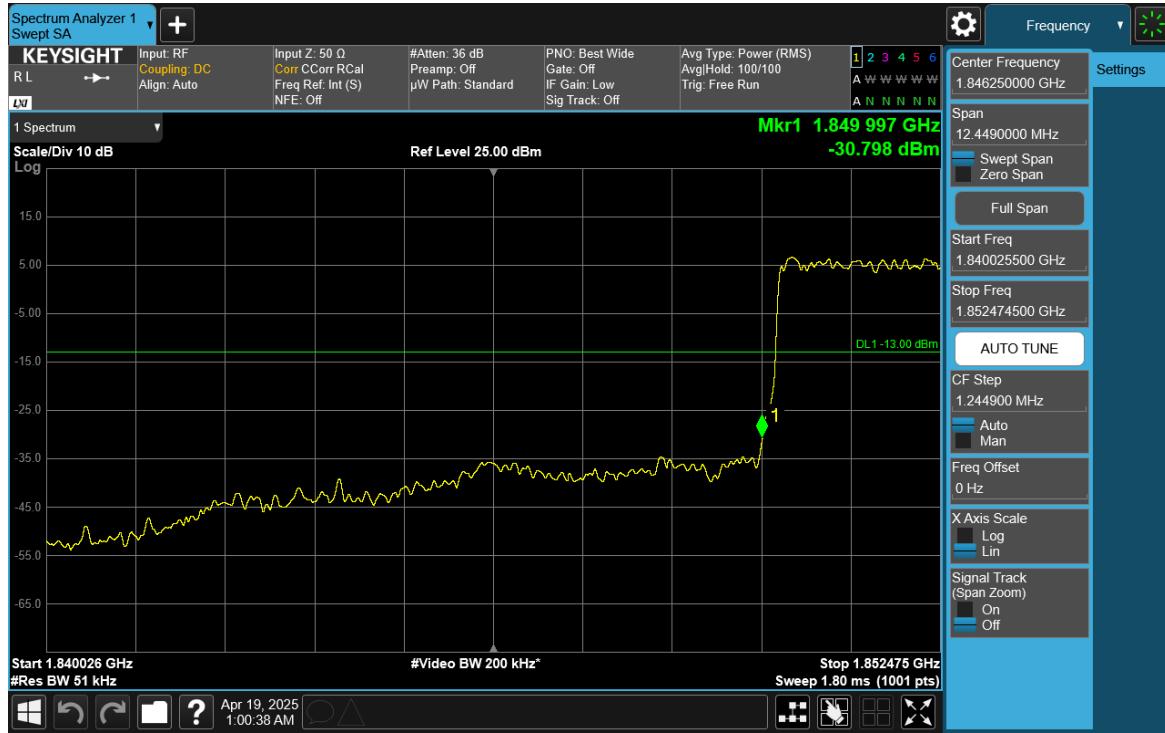


Plot 7-112. Lower Band Edge Plot (NR Band n2 – 5MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT	
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Approved by: Technical Manager Page 76 of 131




Plot 7-113. Upper Band Edge Plot (NR Band n2 – 5MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

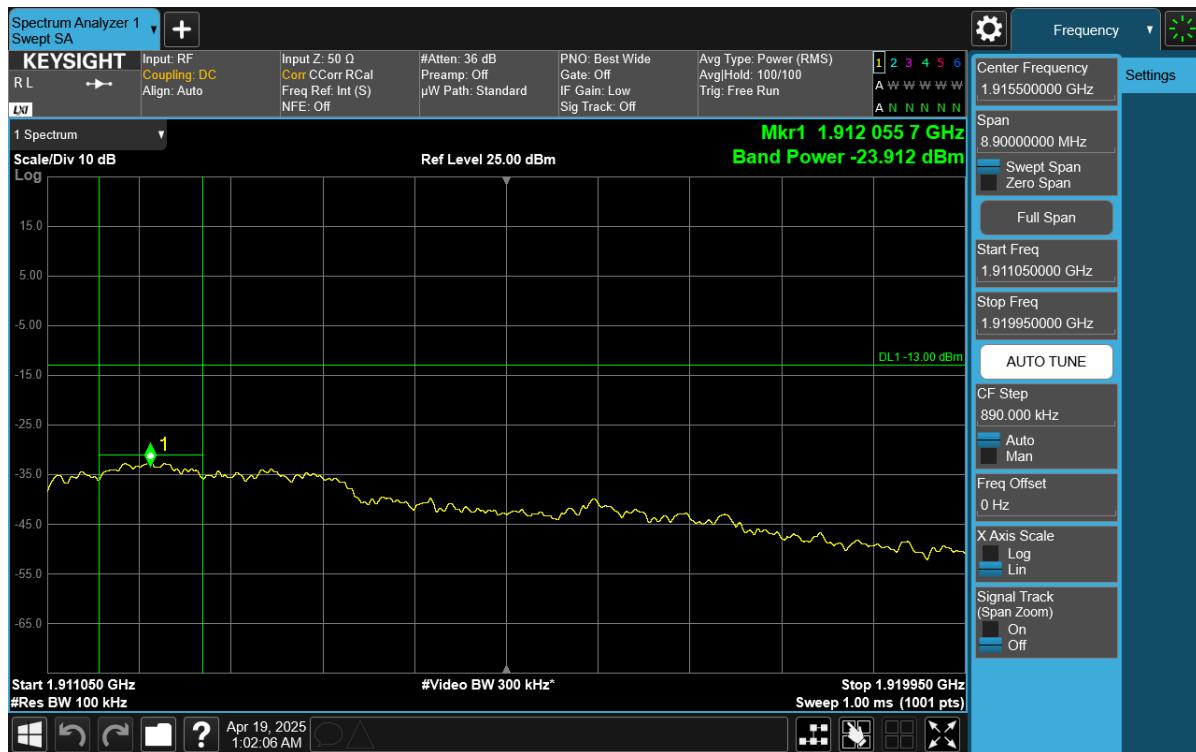


Plot 7-114. Extended Upper Band Edge Plot (NR Band n2 – 5MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 77 of 131	

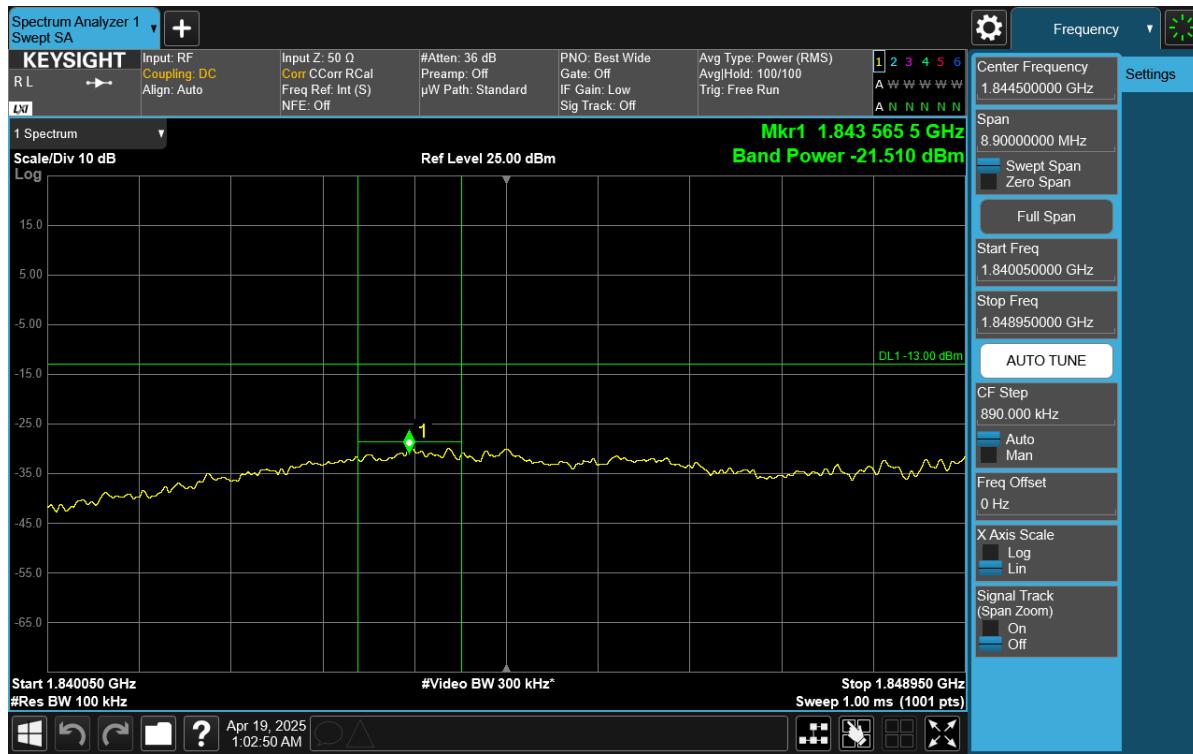


Plot 7-115. Extended Lower Band Edge Plot (NR Band n2 – 10MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

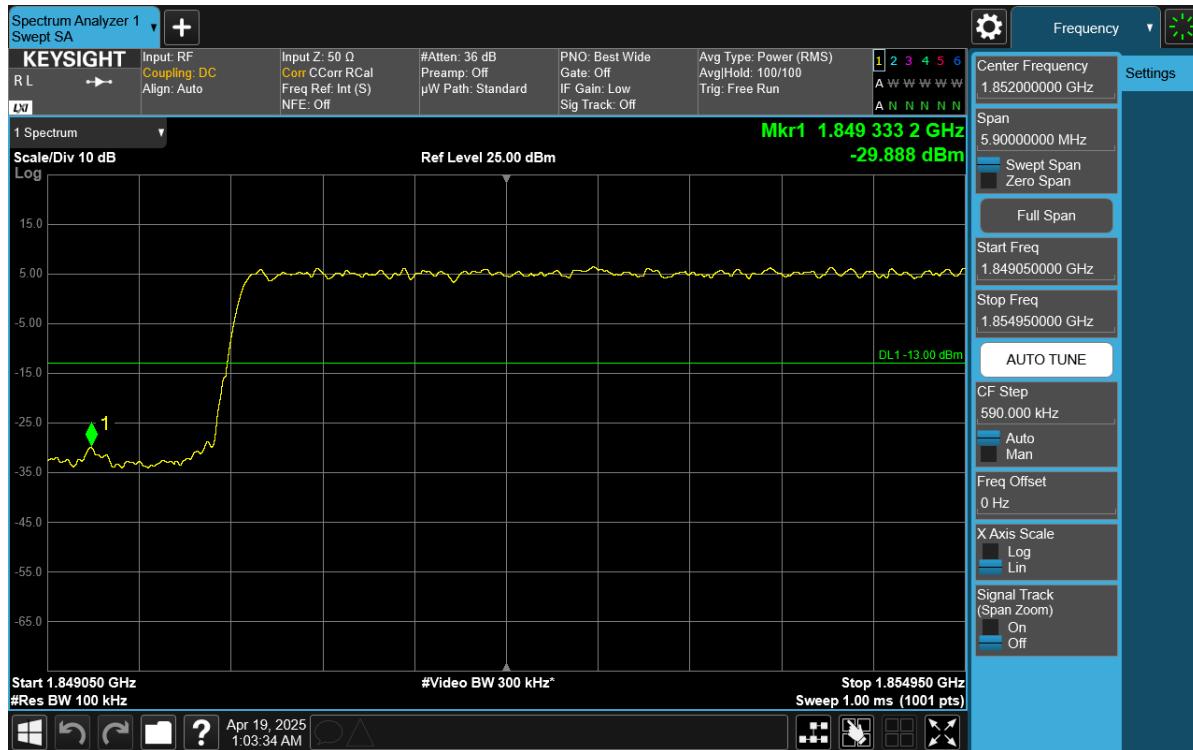


Plot 7-116. Lower Band Edge Plot (NR Band n2 – 10MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 78 of 131

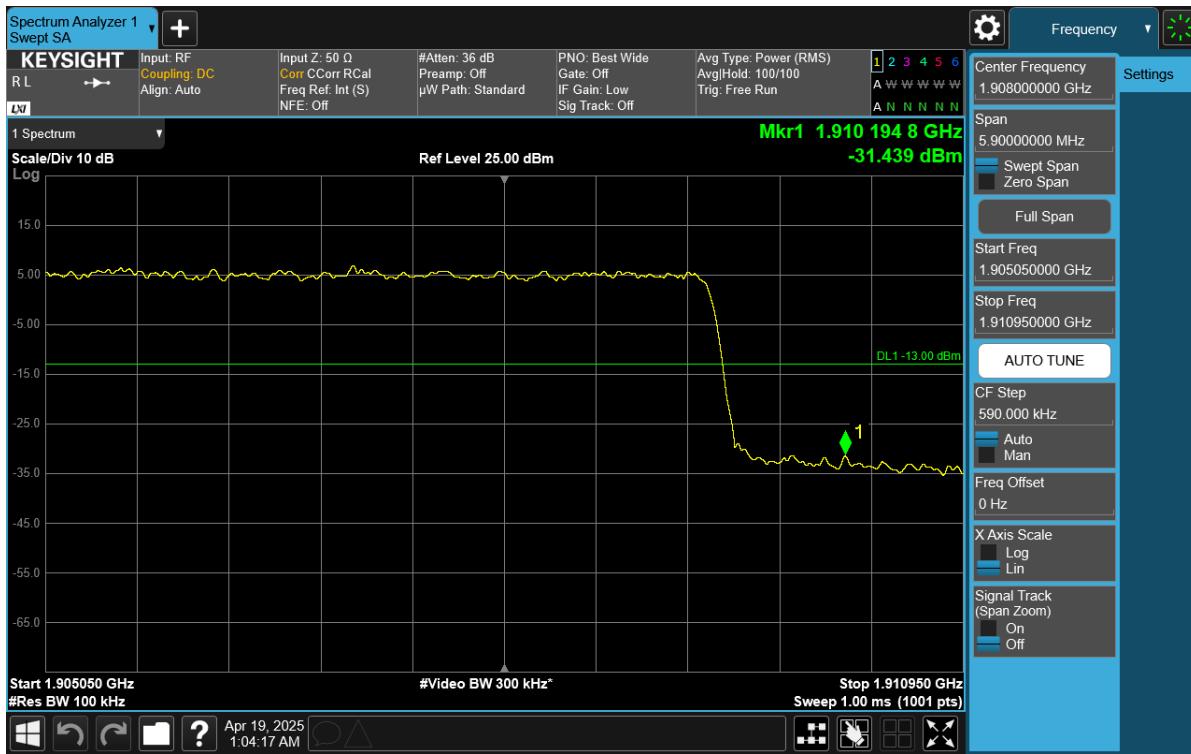


Plot 7-117. Upper Band Edge Plot (NR Band n2 – 10MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

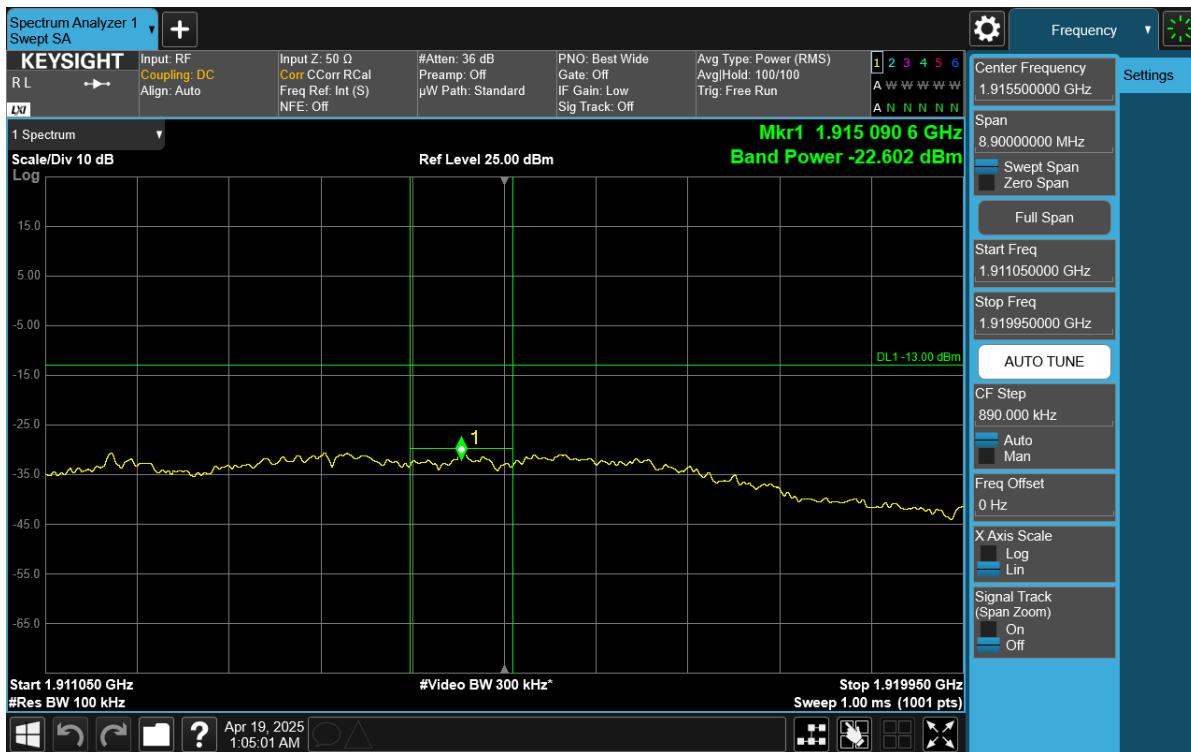


Plot 7-118. Extended Upper Band Edge Plot (NR Band n2 – 10MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 79 of 131


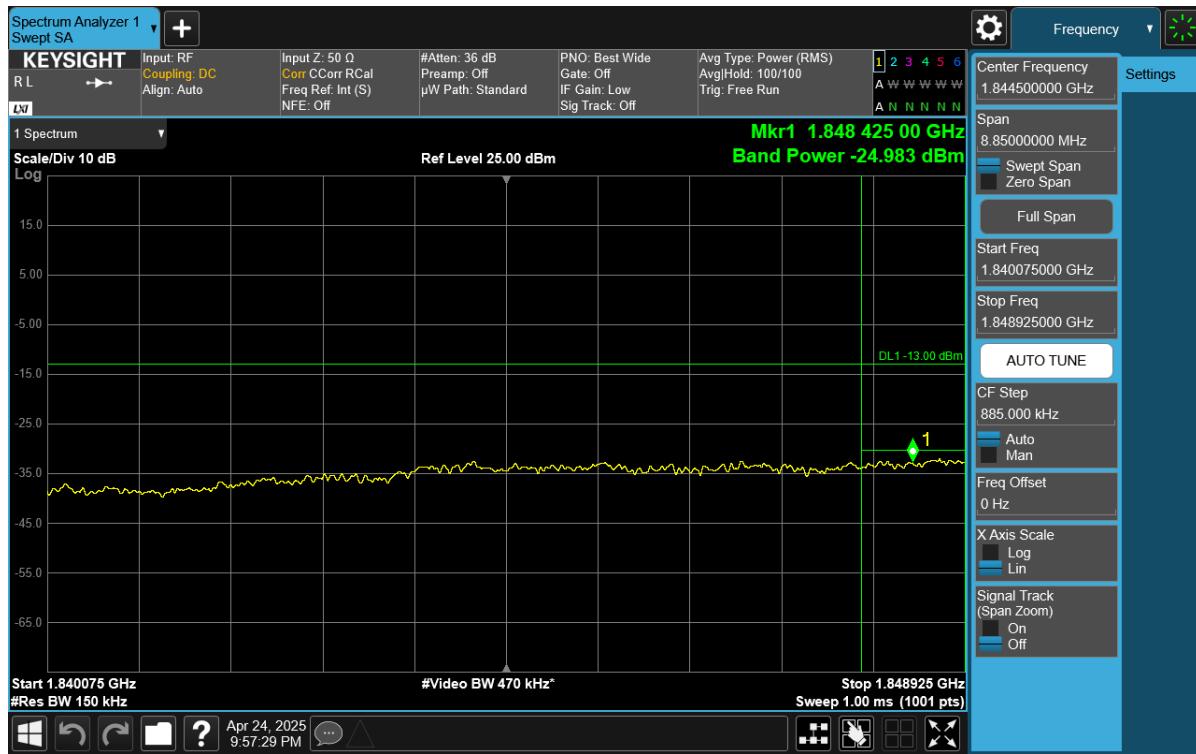


Plot 7-119. Extended Lower Band Edge Plot (NR Band n2 – 15MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

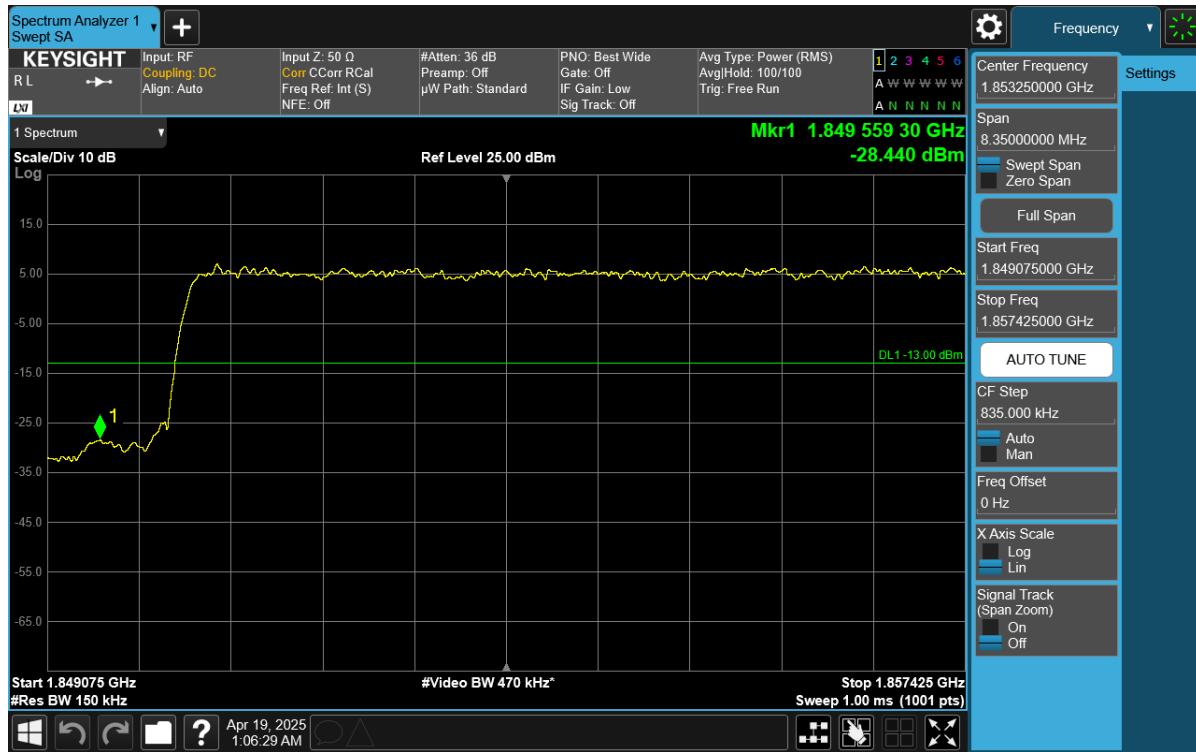


Plot 7-120. Lower Band Edge Plot (NR Band n2 – 15MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 80 of 131	

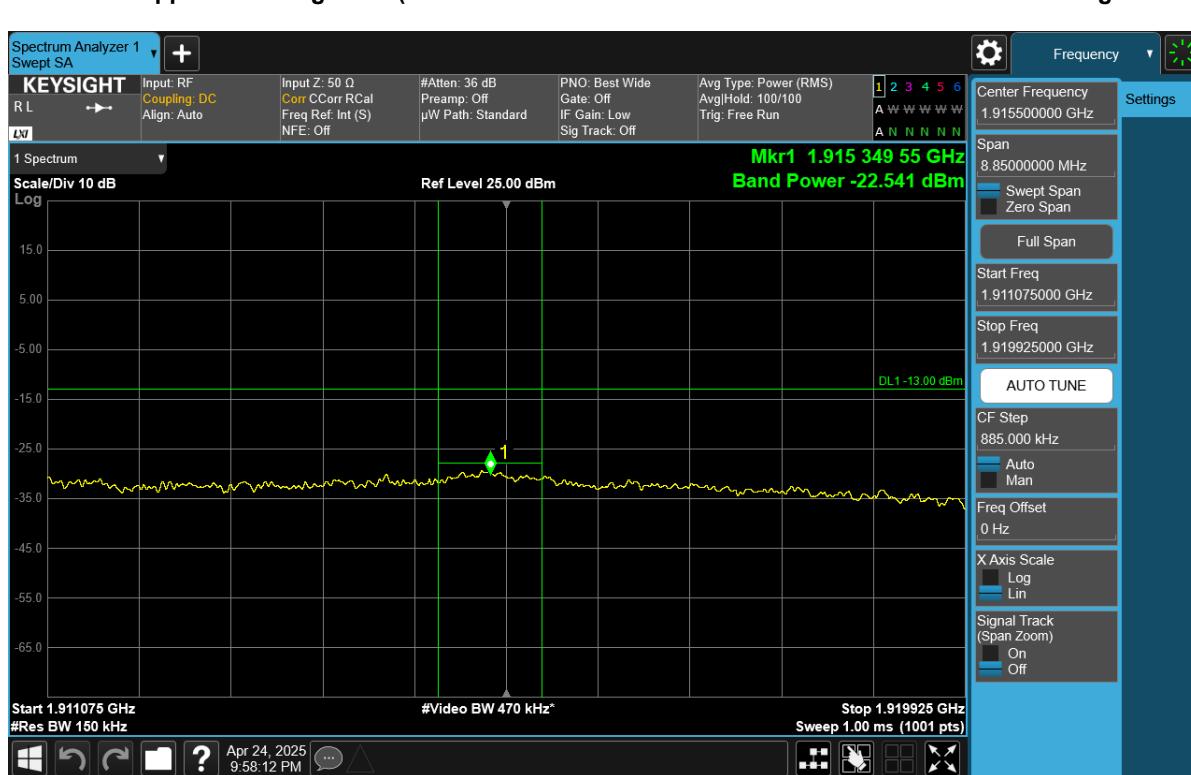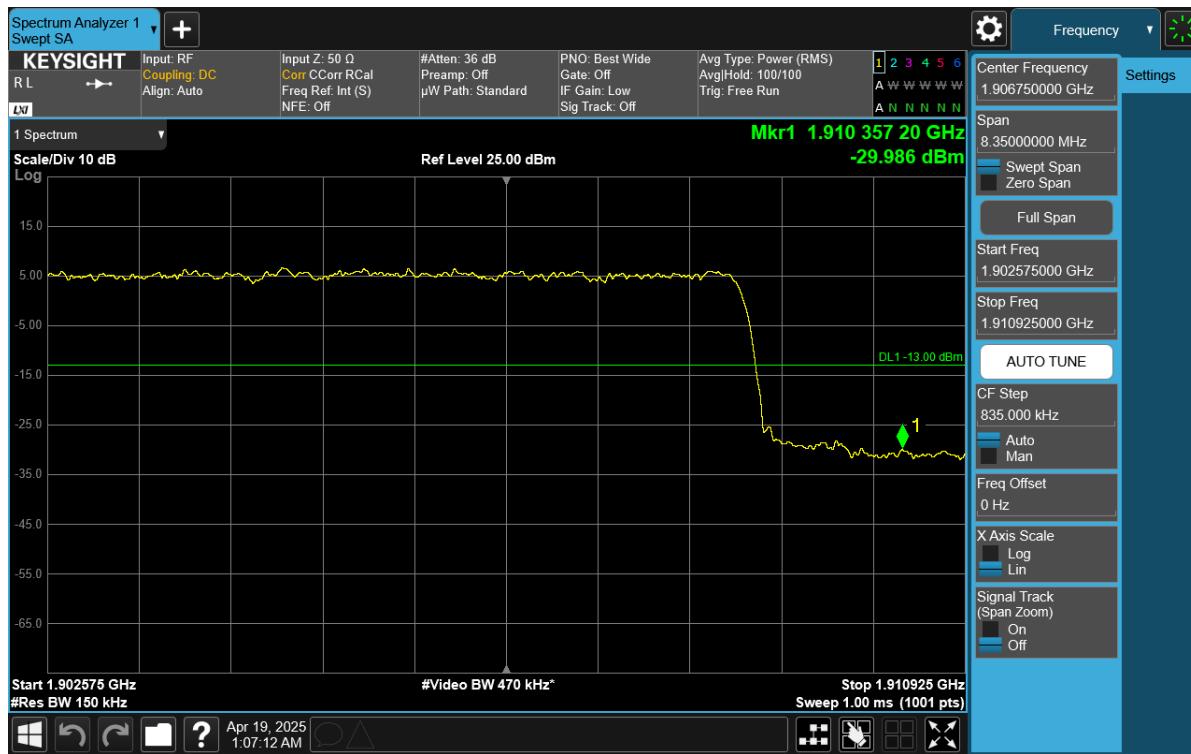


Plot 7-122. Extended Upper Band Edge Plot (NR Band n2 – 15MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 81 of 131

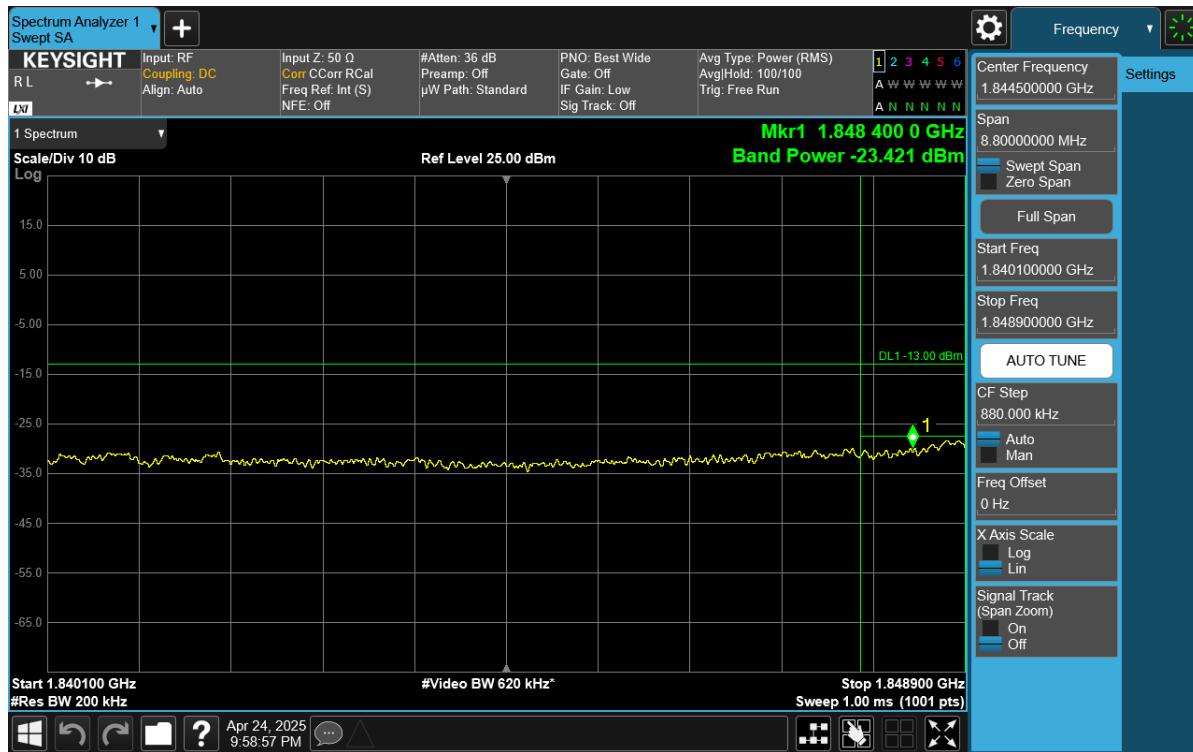


Plot 7-123. Extended Lower Band Edge Plot (NR Band n2 – 20MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

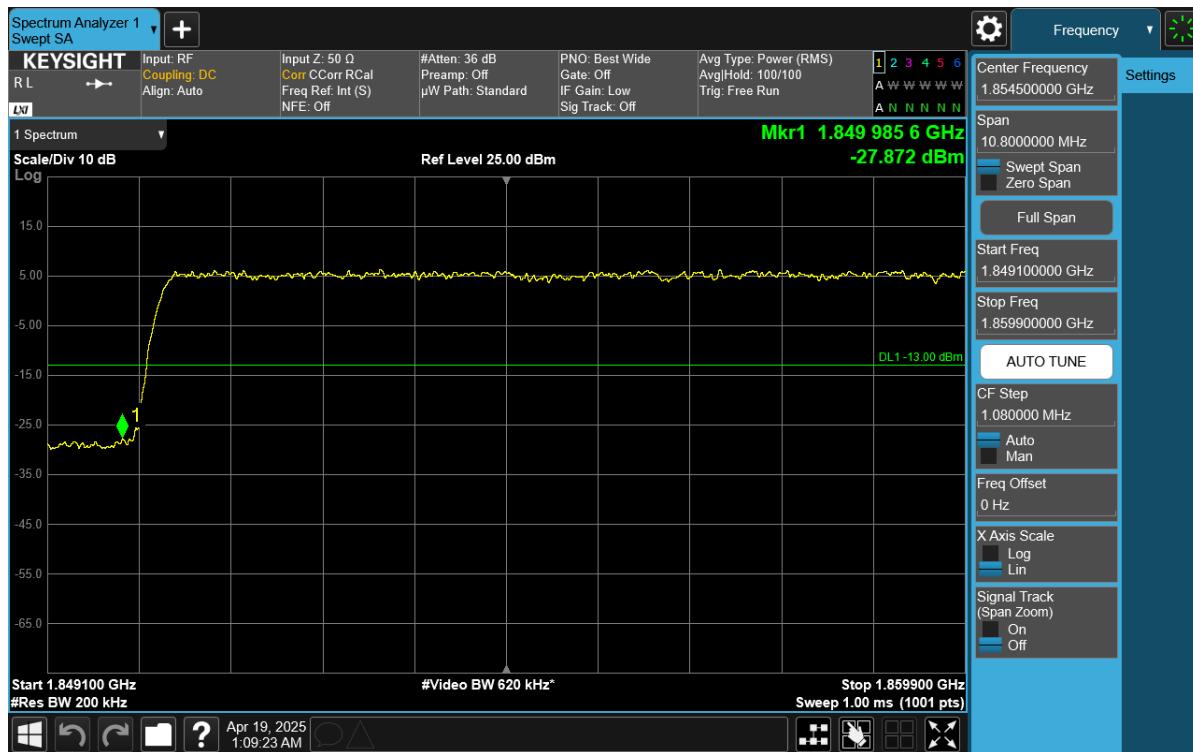


Plot 7-124. Lower Band Edge Plot (NR Band n2 – 20MHz DFT-S-OFDM $\pi/2$ BPSK – Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 82 of 131

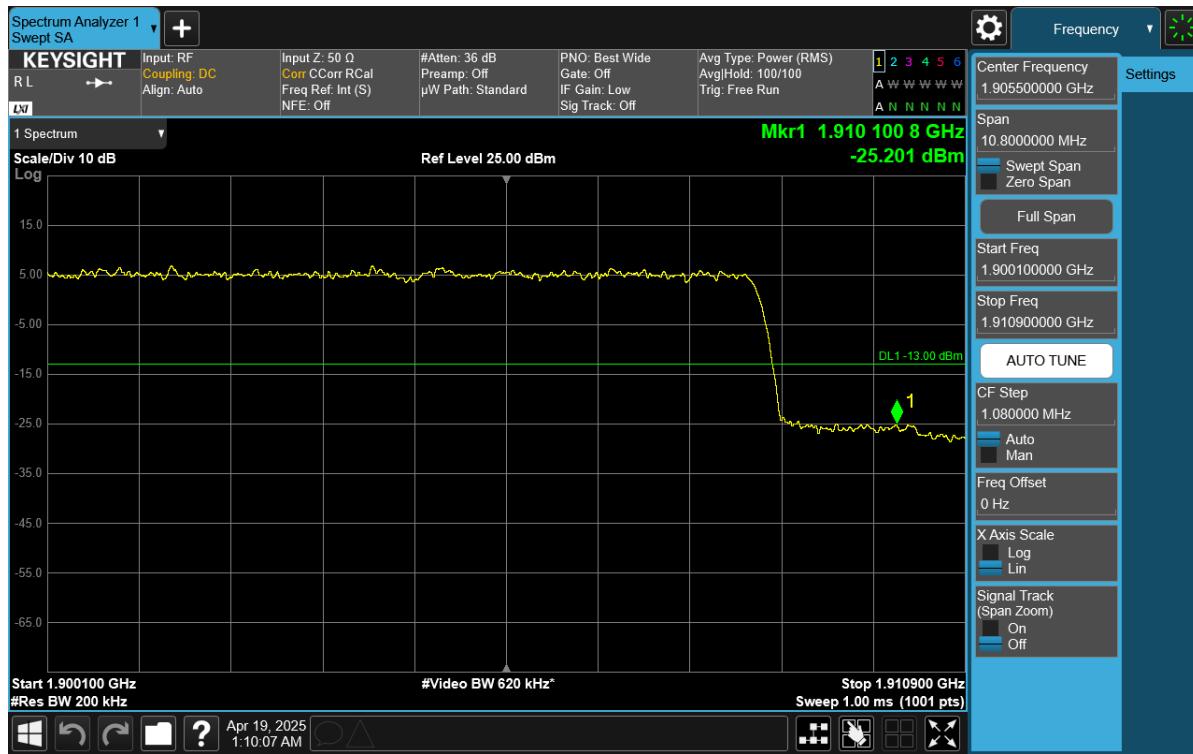

Plot 7-125. Upper Band Edge Plot (NR Band n2 – 20MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

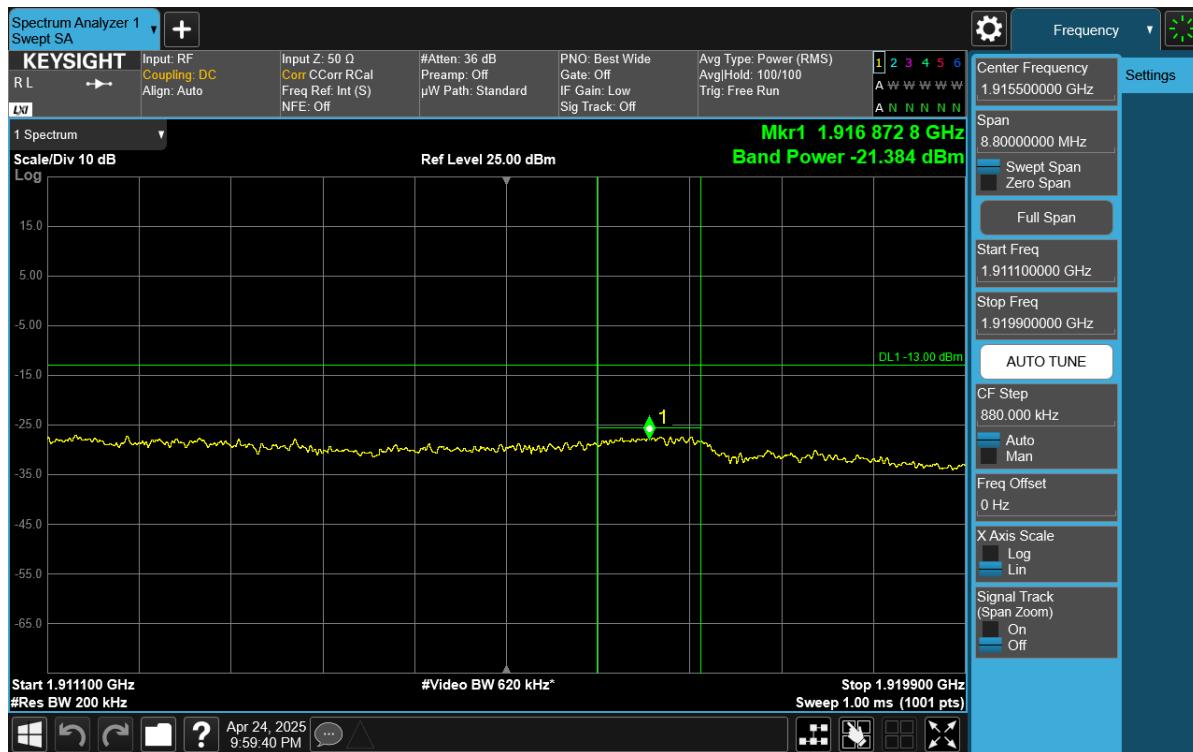

Plot 7-126. Extended Upper Band Edge Plot (NR Band n2 – 20MHz DFT-S-OFDM π/2 BPSK – Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 83 of 131

7.5 Peak-Average Ratio

§24.232(d)

Test Overview and Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

The peak to average power ratio (PAPR) of the equipment shall not exceed 13 dB for more than 0.1% of the time.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

FCC ID: BCG-A3326	 element			PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch			Page 84 of 131

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

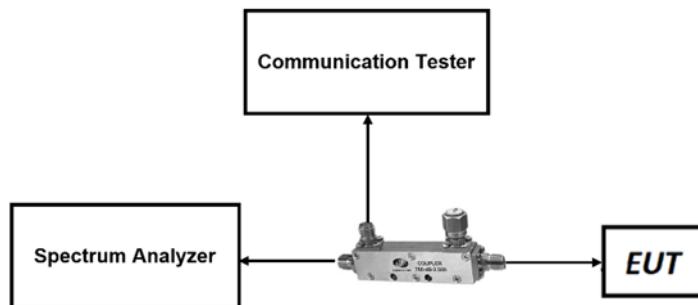


Figure 7-7. LTE Test Instrument & Measurement Setup

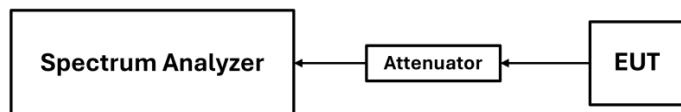



Figure 7-8. FR1 Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 85 of 131

LTE Band 25

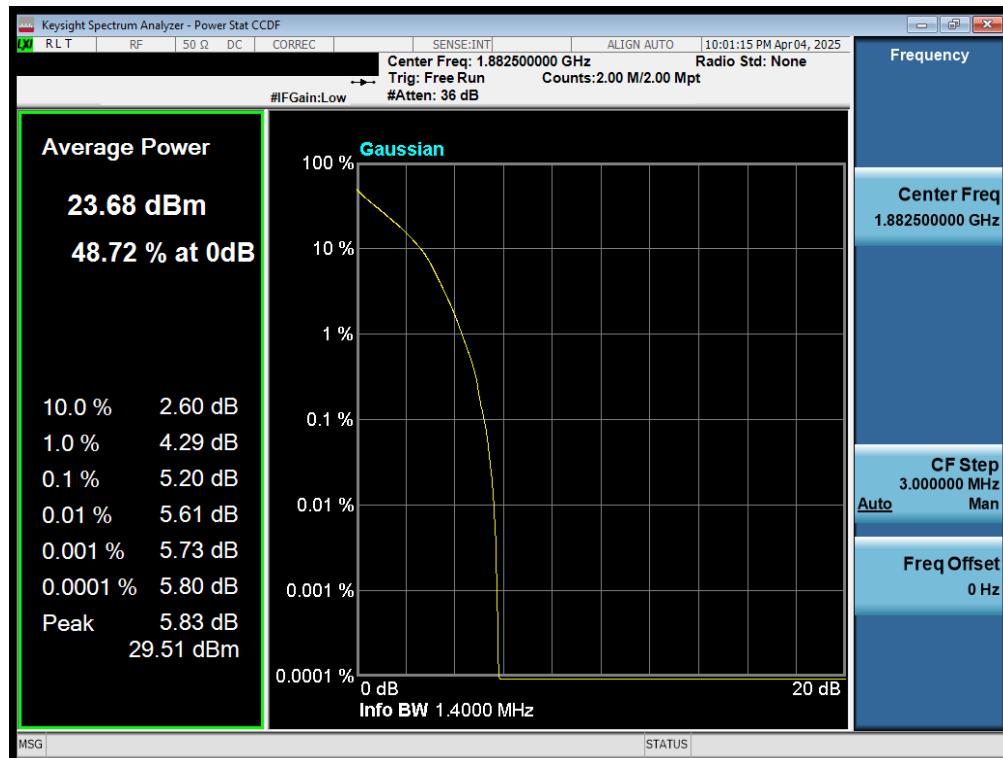


Plot 7-127. PAR Plot (LTE Band 25 - 1.4MHz QPSK - Full RB Configuration)

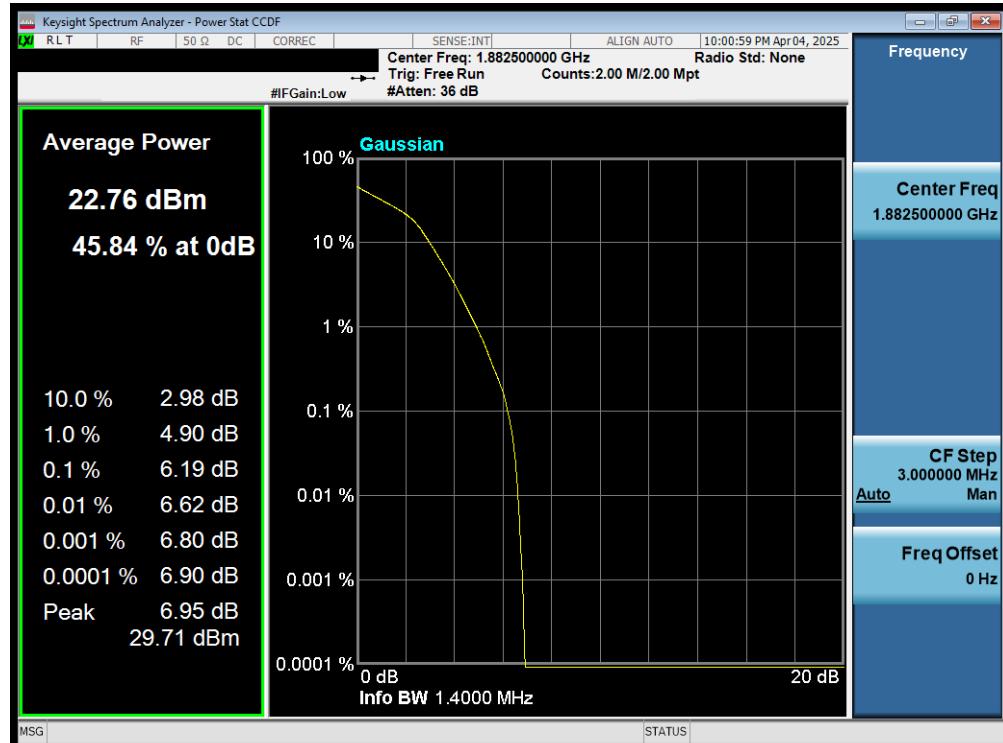


Plot 7-128. PAR Plot (LTE Band 25 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	 element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		

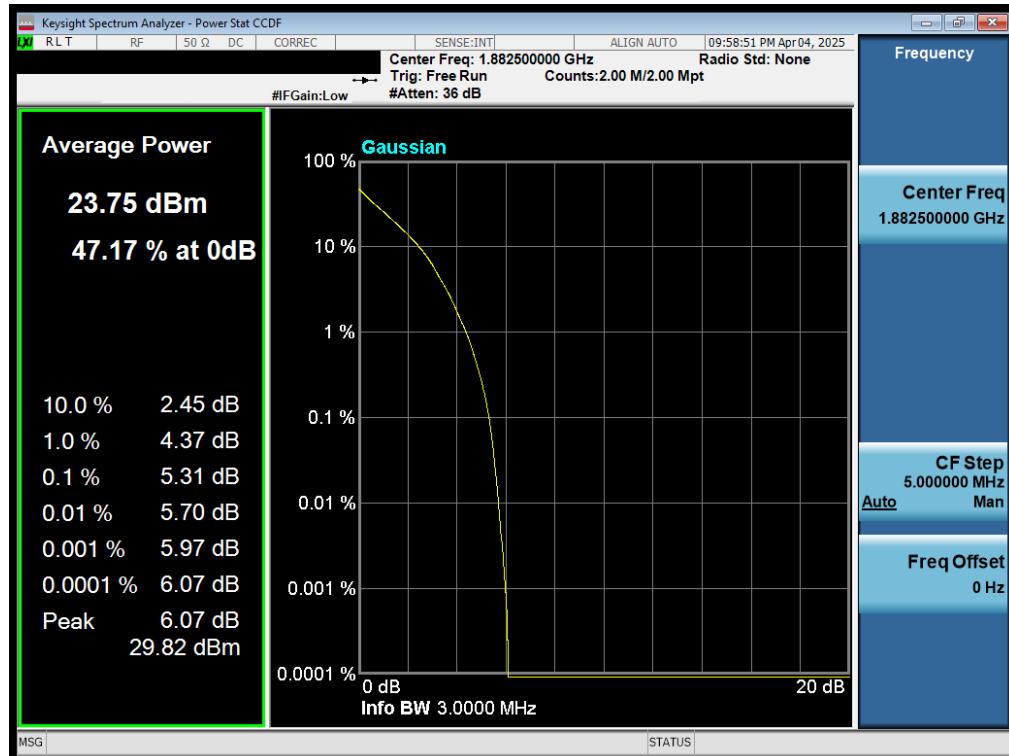


Plot 7-129. PAR Plot (LTE Band 25 - 3MHz QPSK - Full RB Configuration)

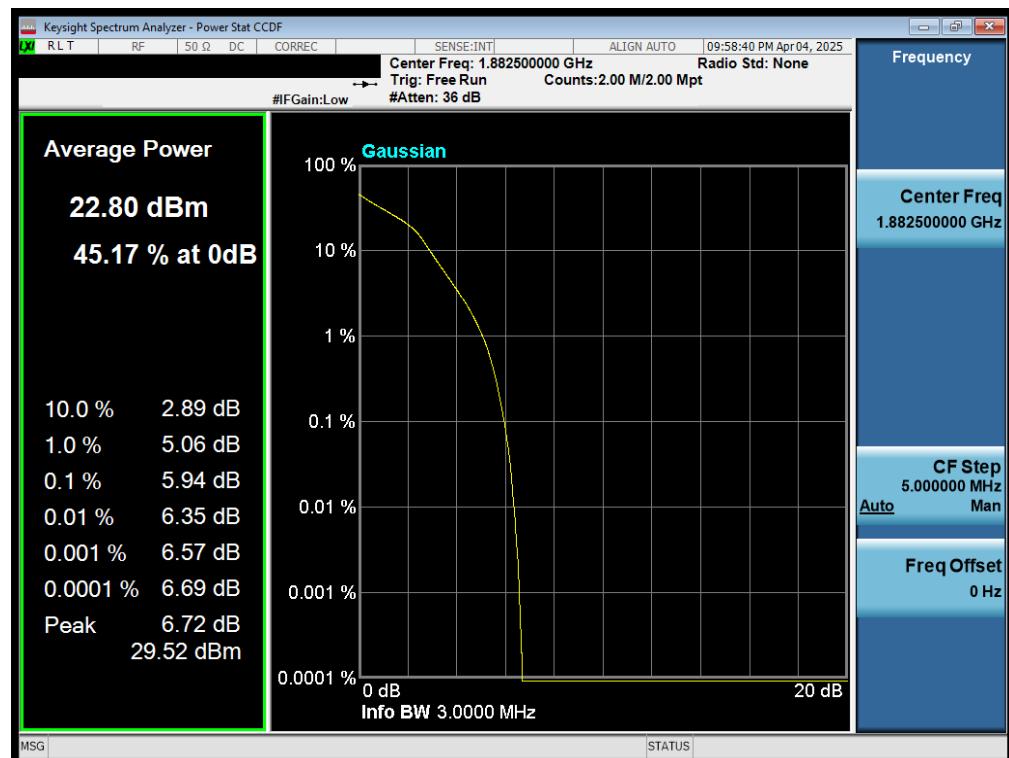


Plot 7-130. PAR Plot (LTE Band 25 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 87 of 131

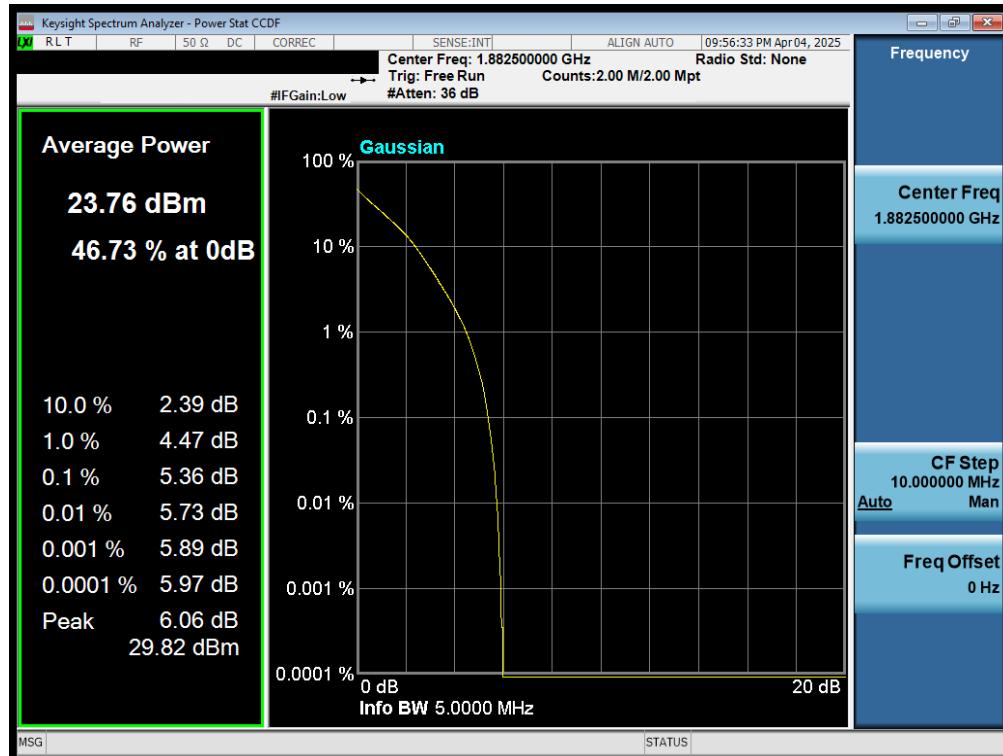


Plot 7-131. PAR Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

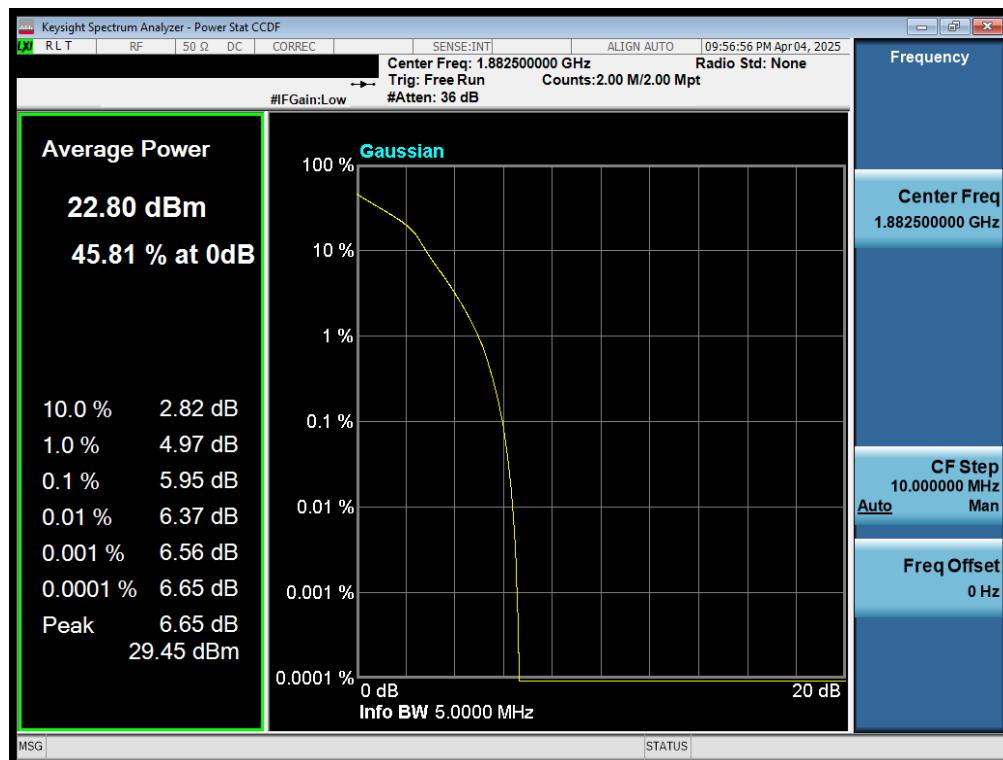


Plot 7-132. PAR Plot (LTE Band 25 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 88 of 131

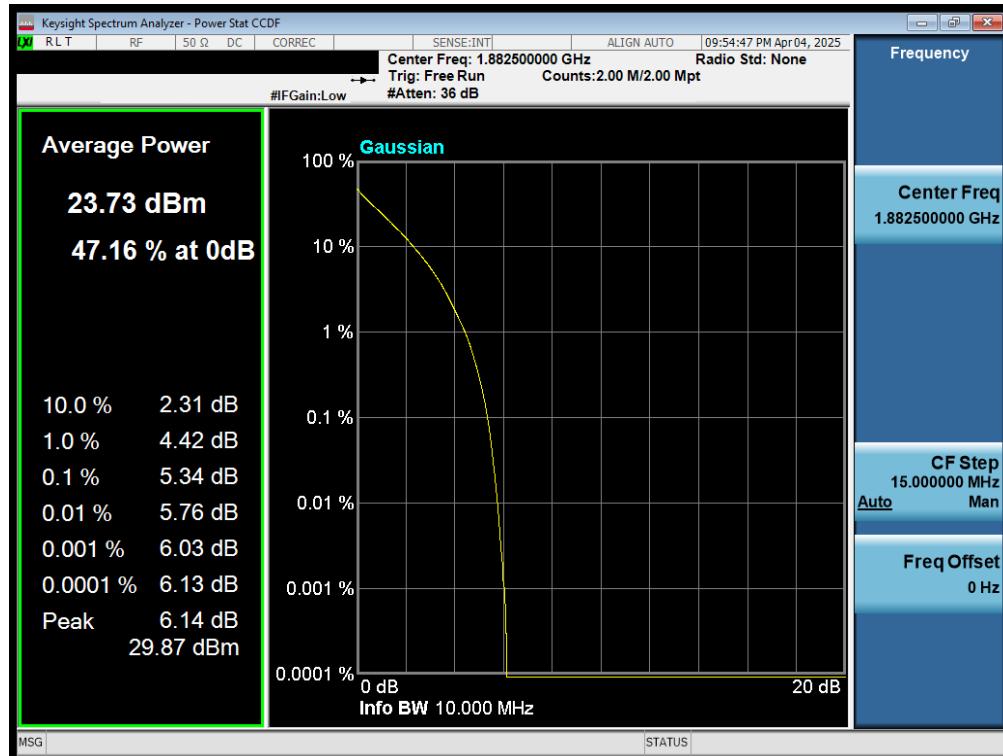


Plot 7-133. PAR Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

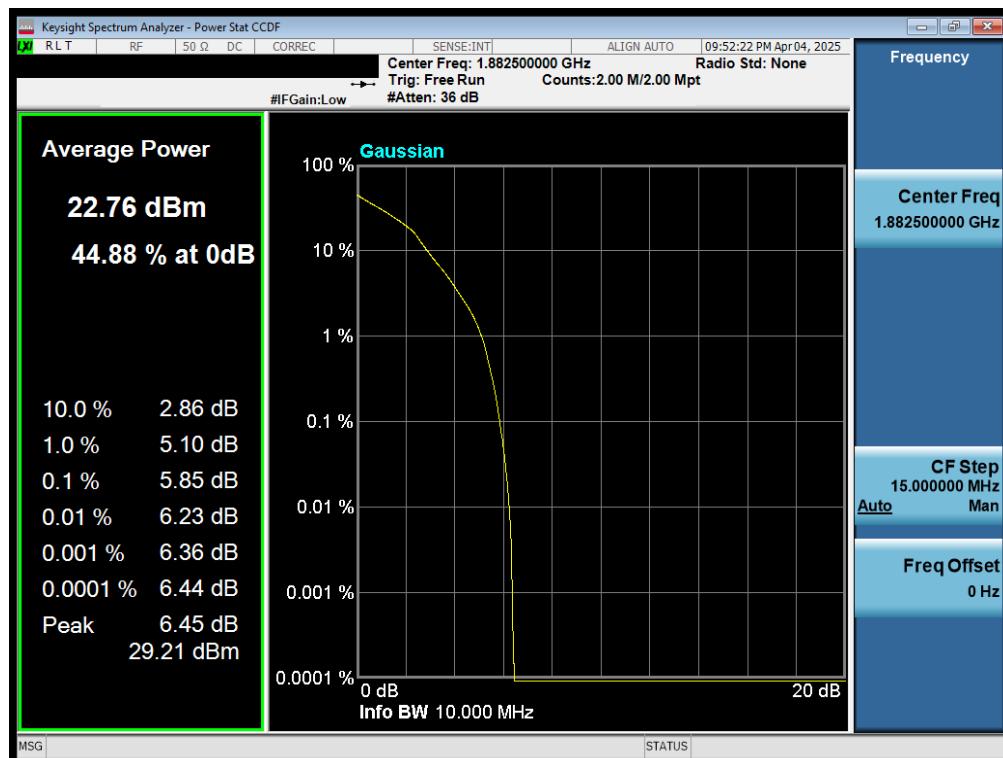


Plot 7-134. PAR Plot (LTE Band 25 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 89 of 131

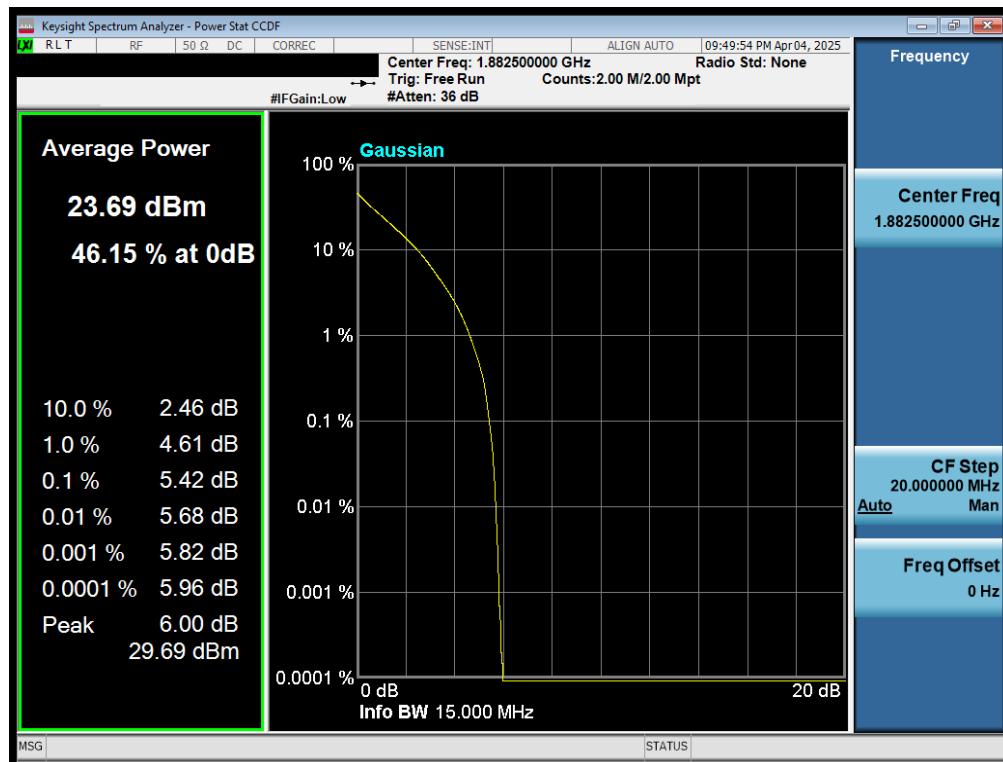


Plot 7-135. PAR Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

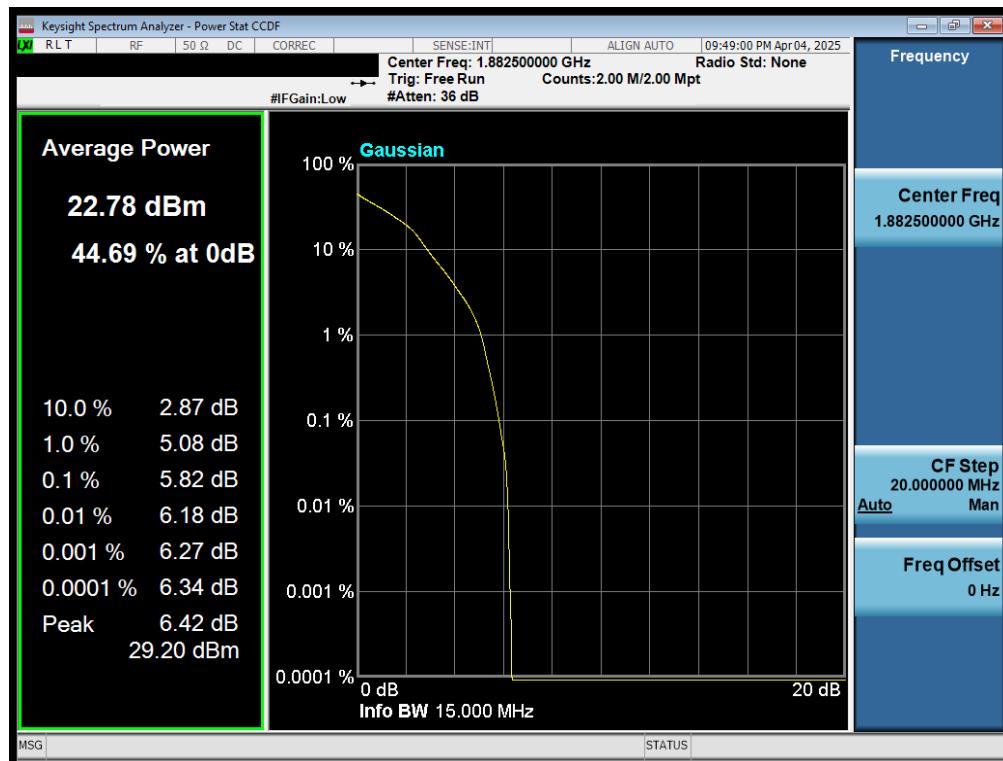


Plot 7-136. PAR Plot (LTE Band 25 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 90 of 131

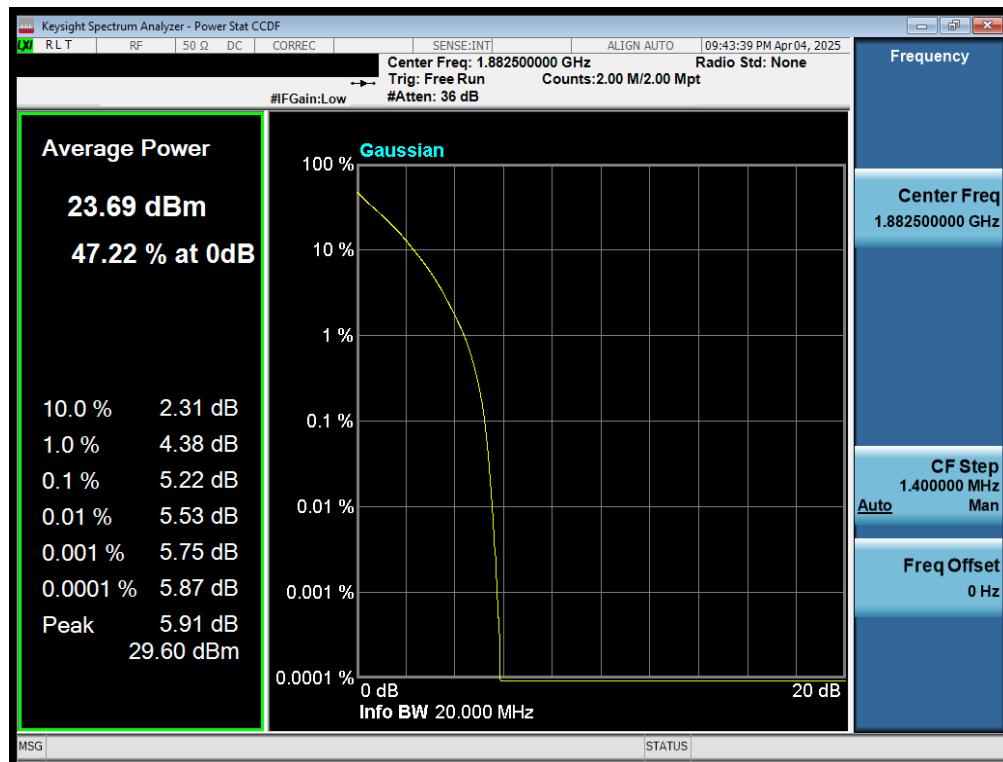


Plot 7-137. PAR Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)

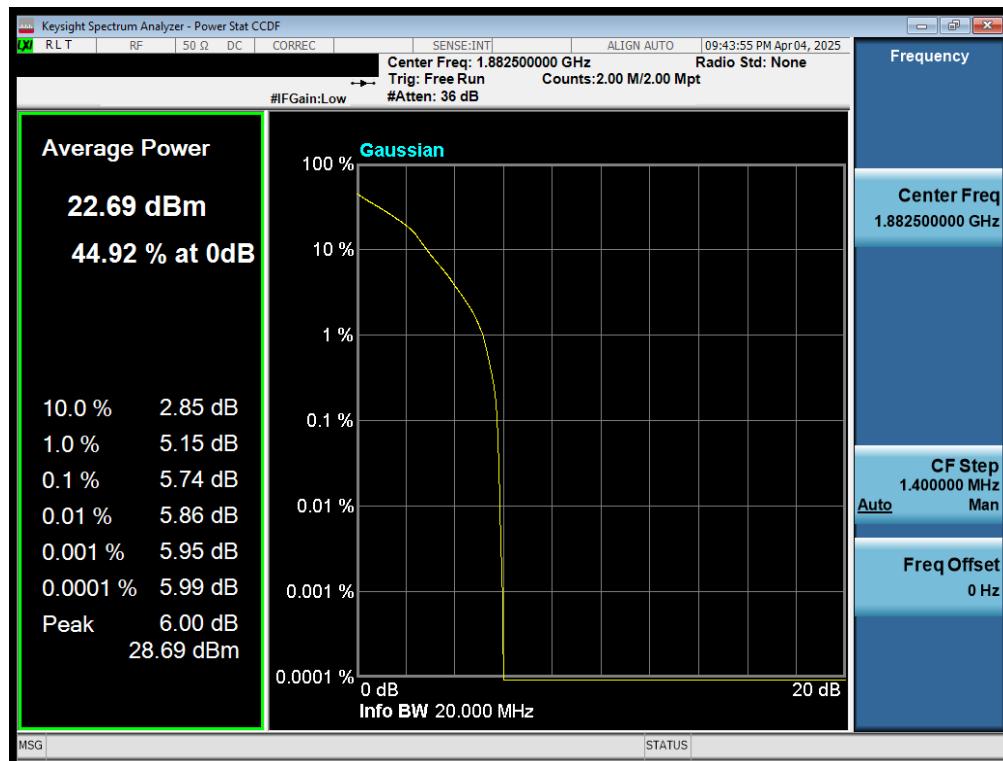


Plot 7-138. PAR Plot (LTE Band 25 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 91 of 131

LTE Band 2

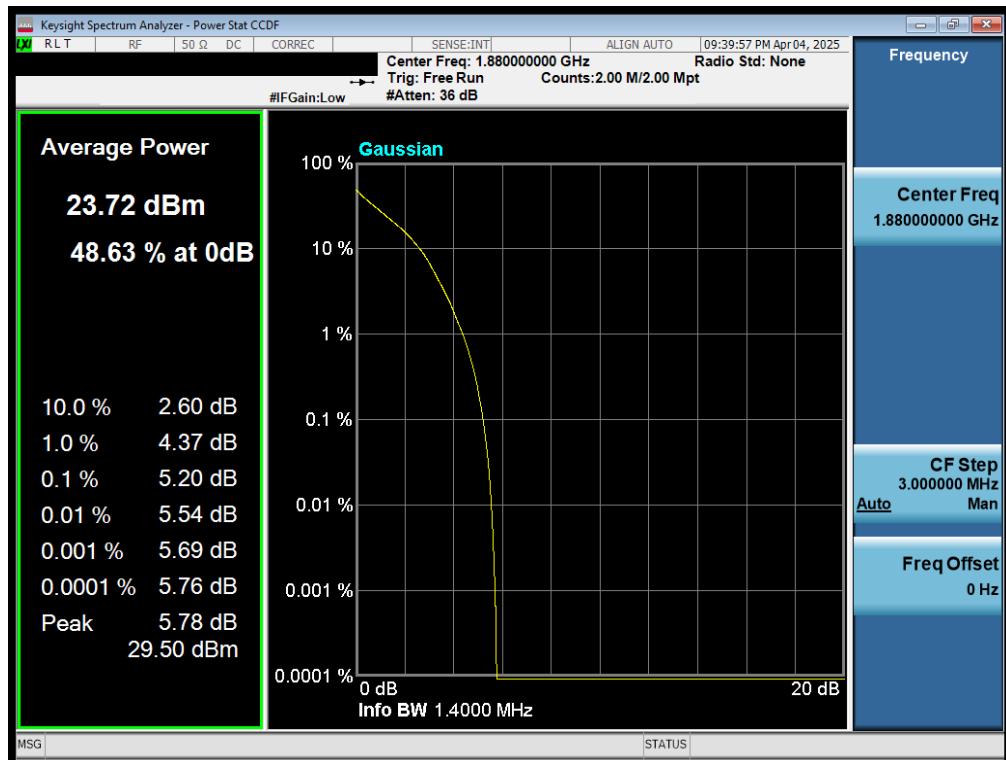


Plot 7-139. PAR Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

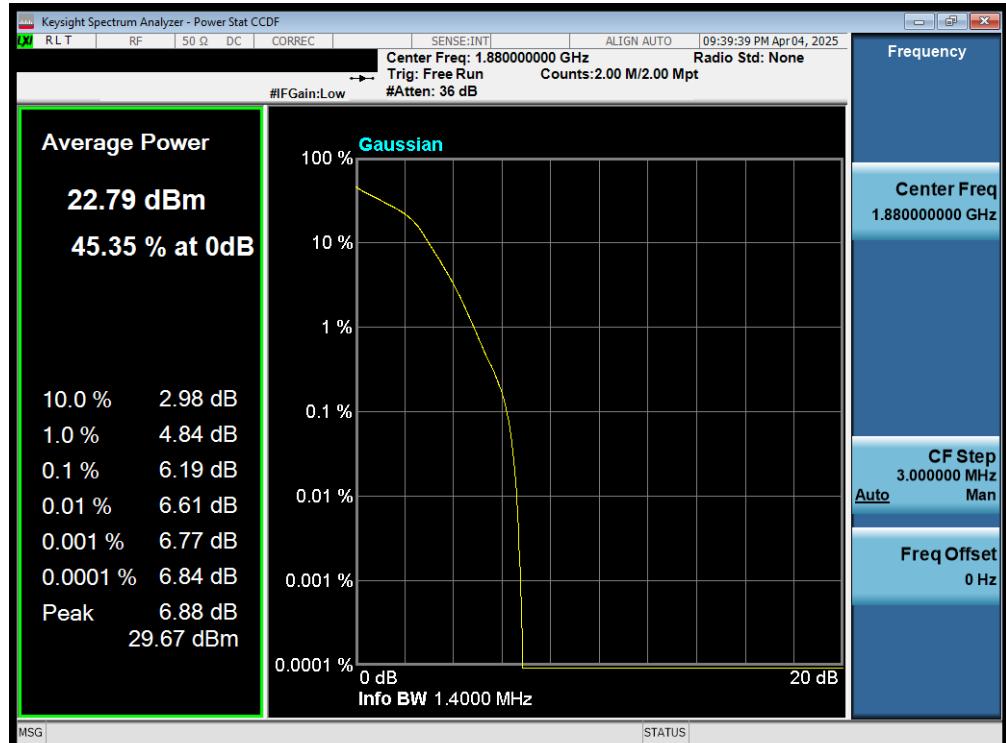


Plot 7-140. PAR Plot (LTE Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	 element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 92 of 131

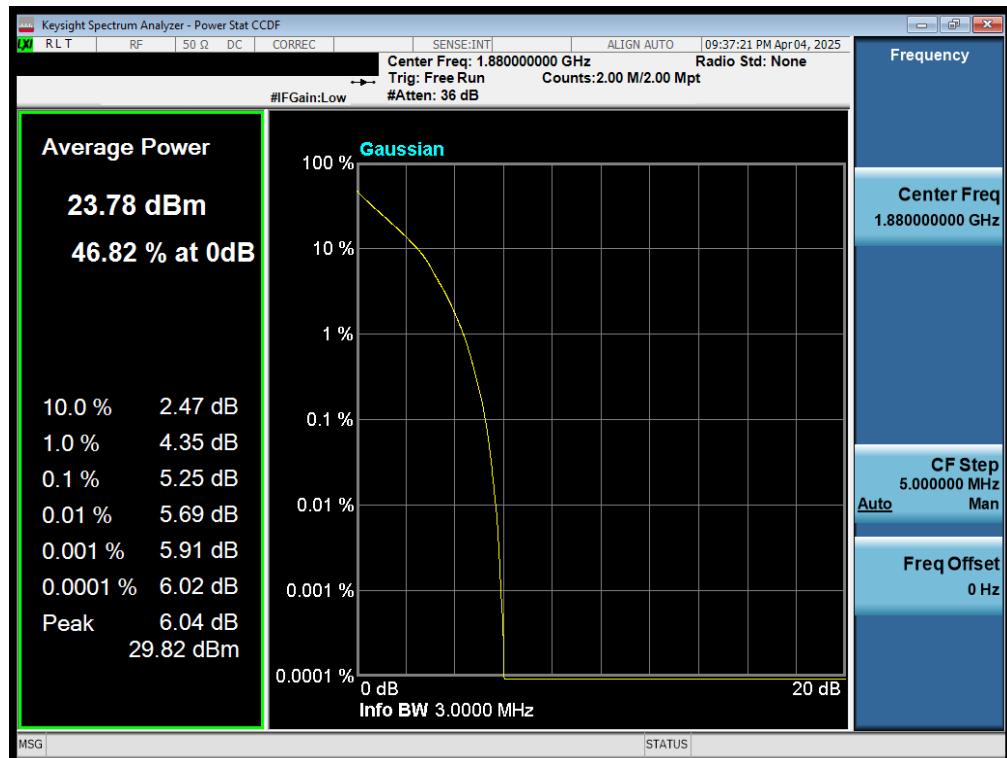


Plot 7-141. PAR Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

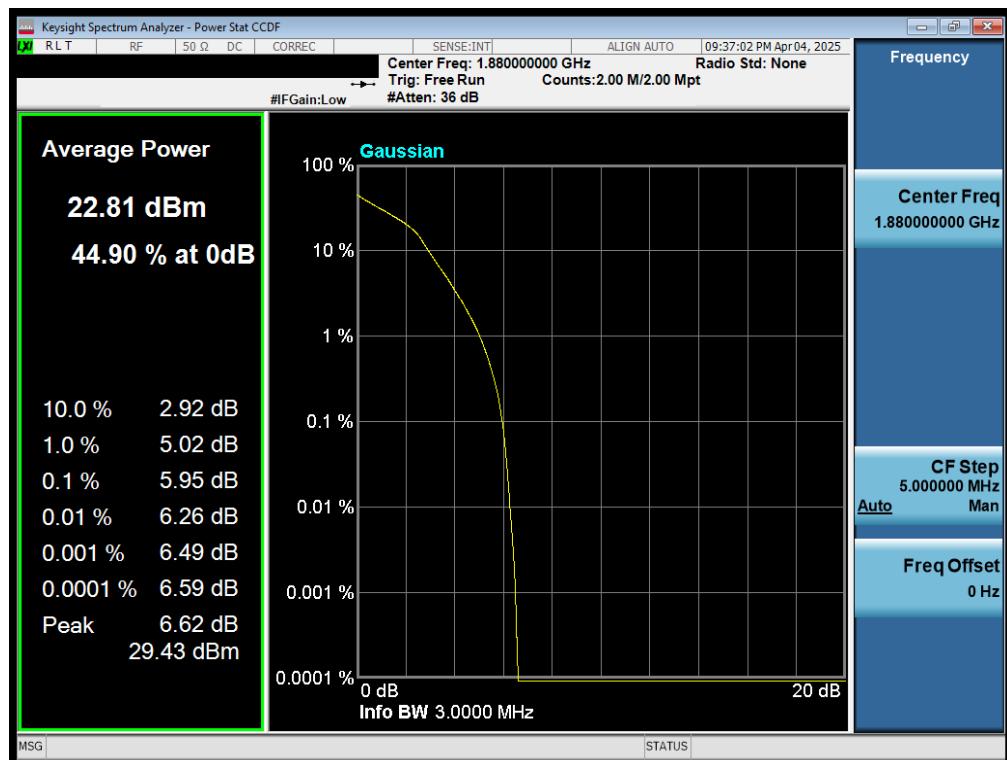


Plot 7-142. PAR Plot (LTE Band 2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		

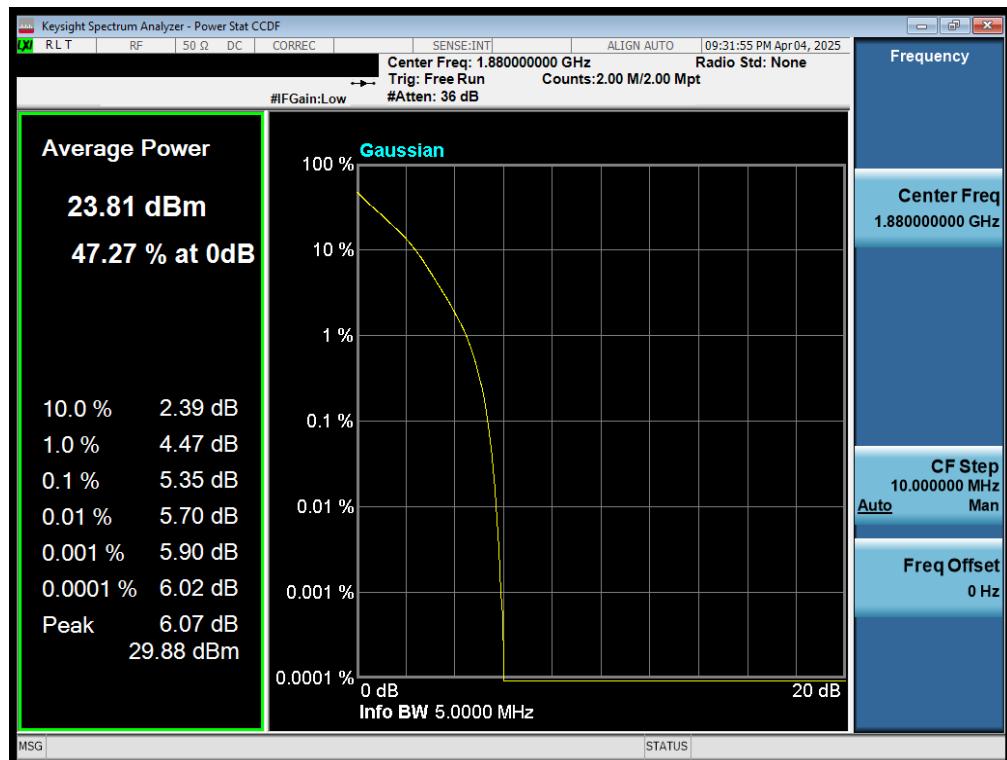


Plot 7-143. PAR Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

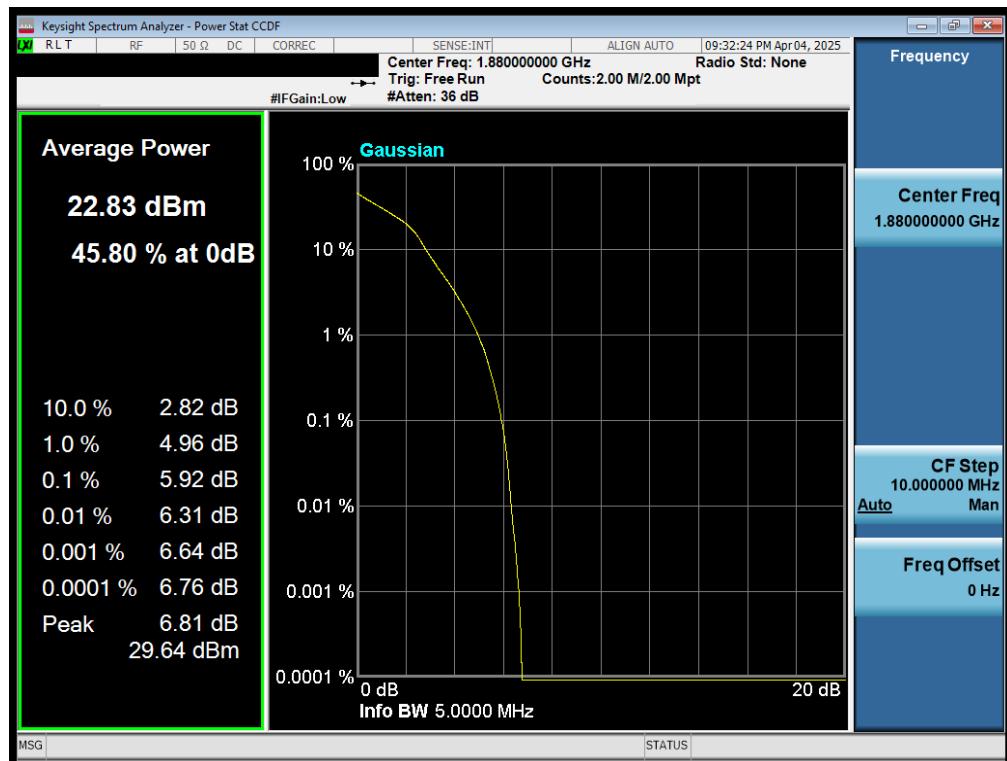


Plot 7-144. PAR Plot (LTE Band 2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 94 of 131

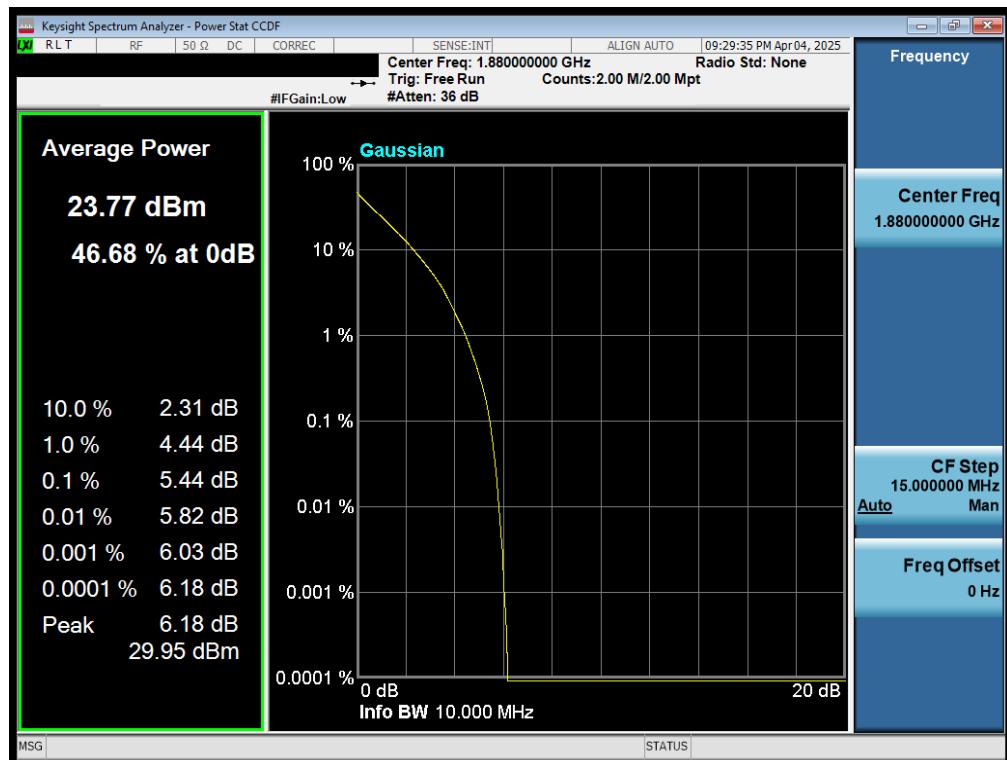


Plot 7-145. PAR Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

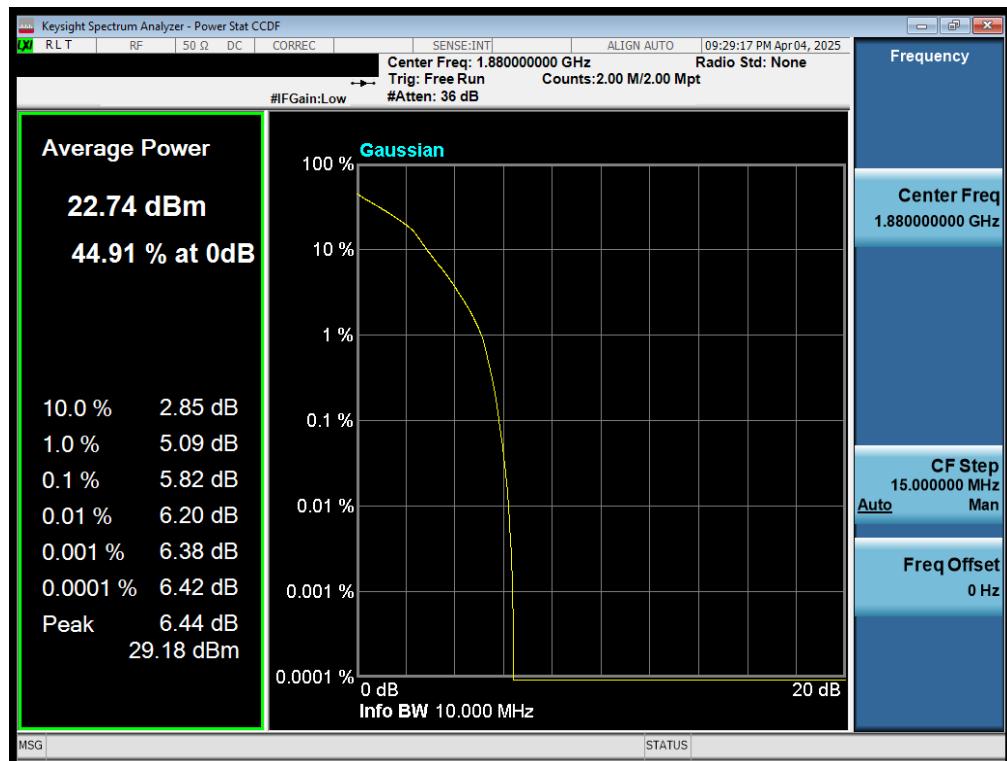


Plot 7-146. PAR Plot (LTE Band 2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 95 of 131

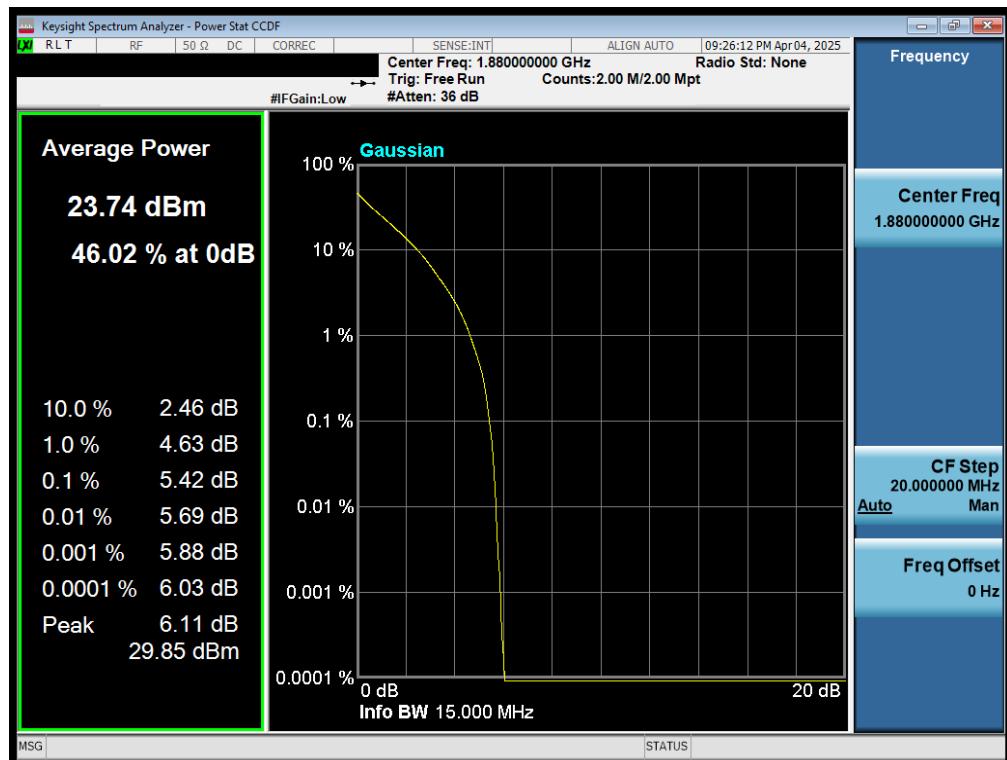


Plot 7-147. PAR Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

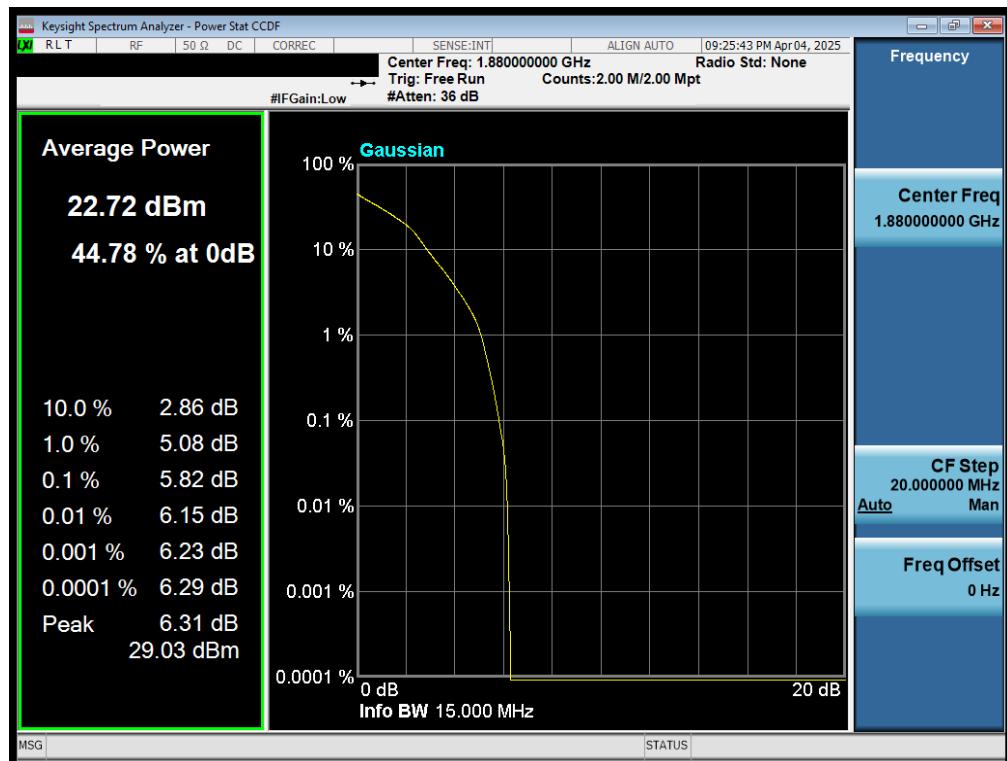


Plot 7-148. PAR Plot (LTE Band 2 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 96 of 131


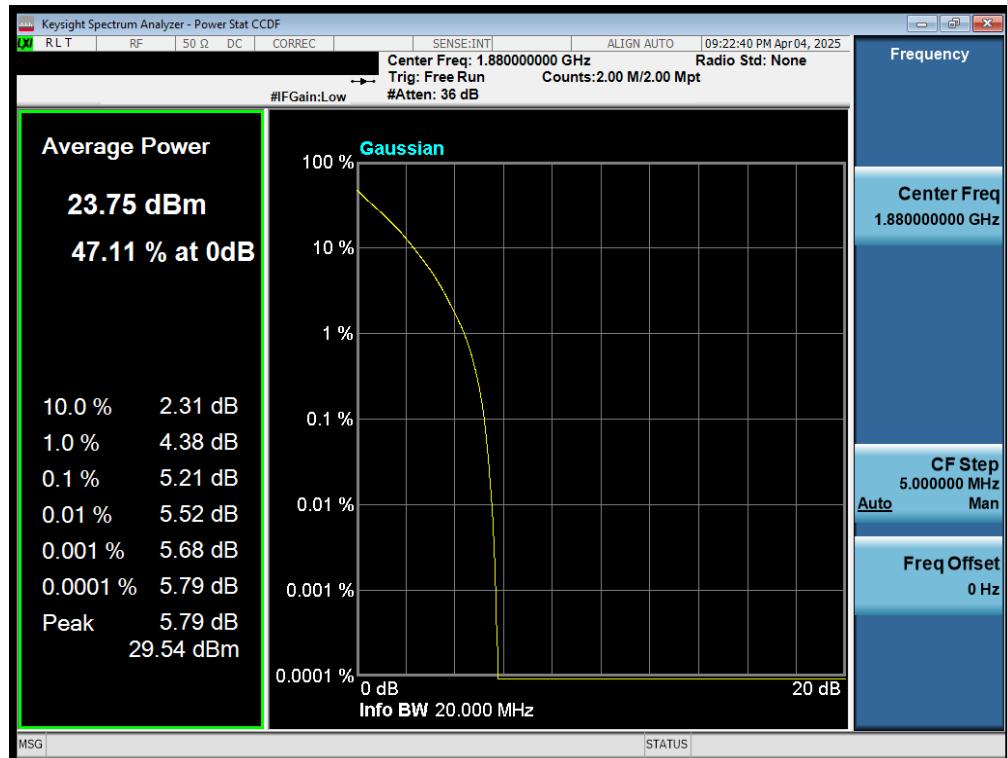


Plot 7-149. PAR Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)


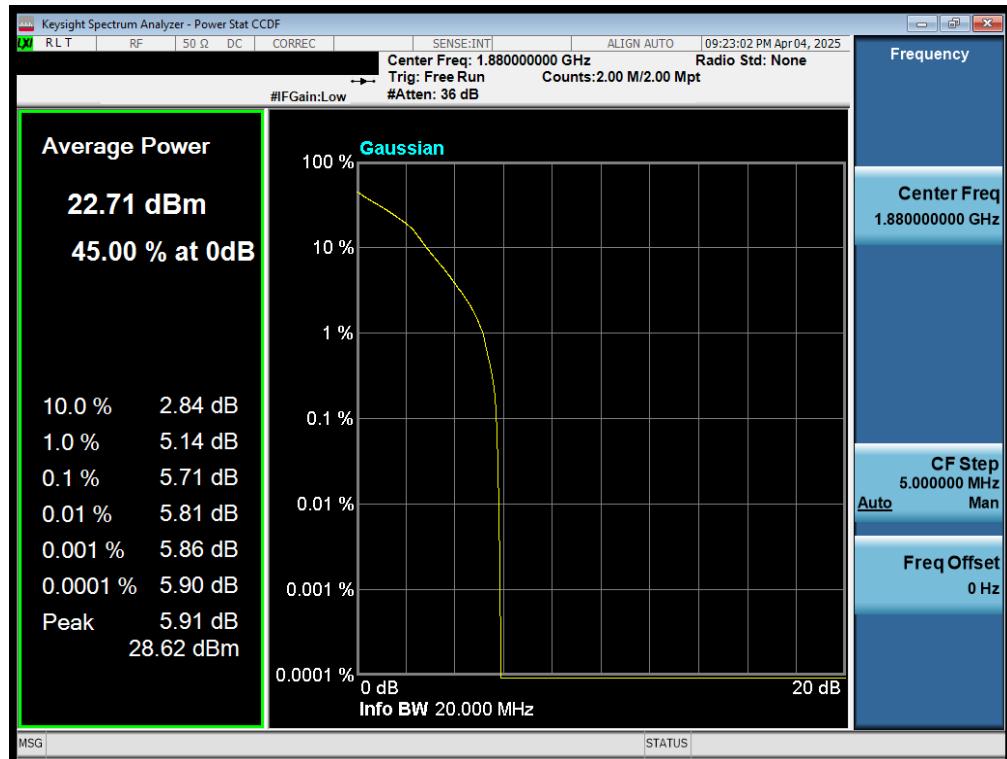


Plot 7-150. PAR Plot (LTE Band 2 - 20MHz 16-QAM - Full RB Configuration)



FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 97 of 131

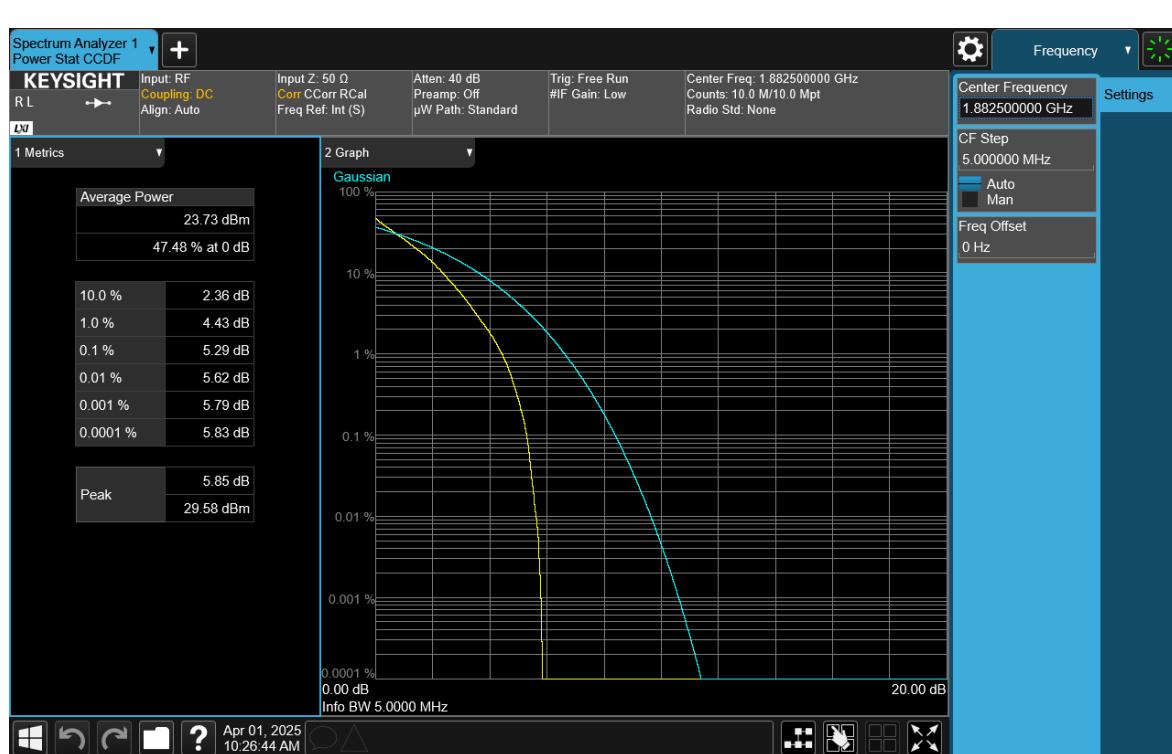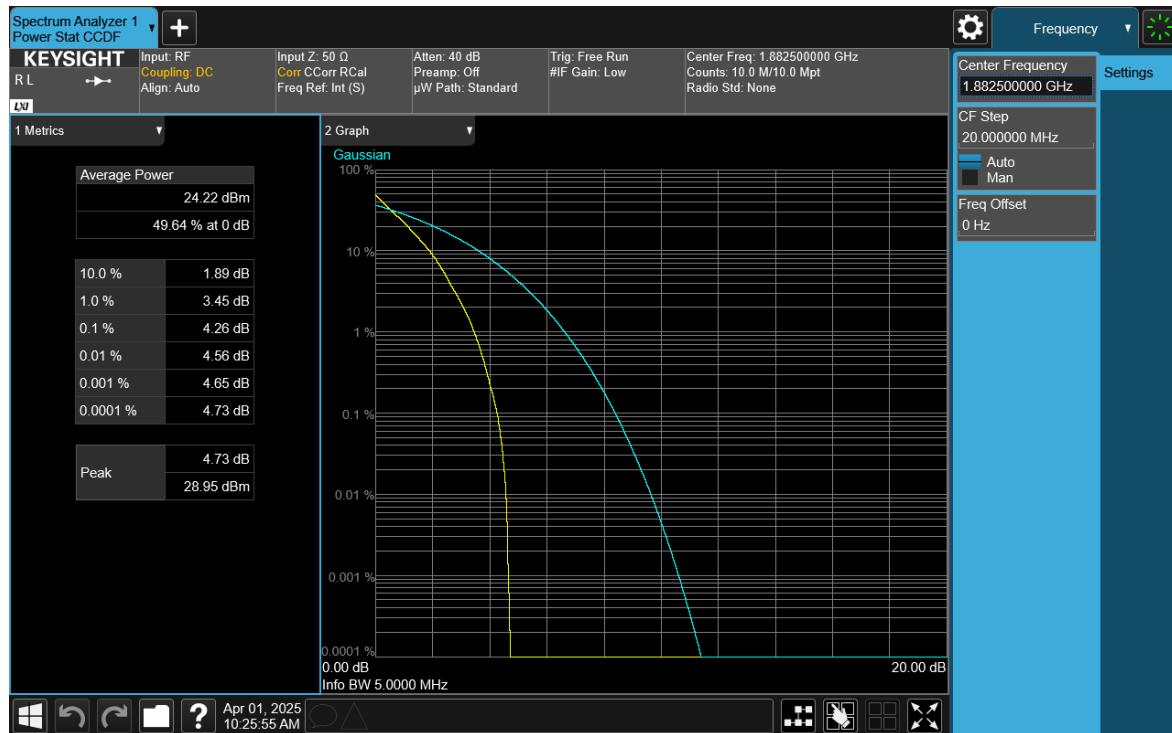NR Band n25


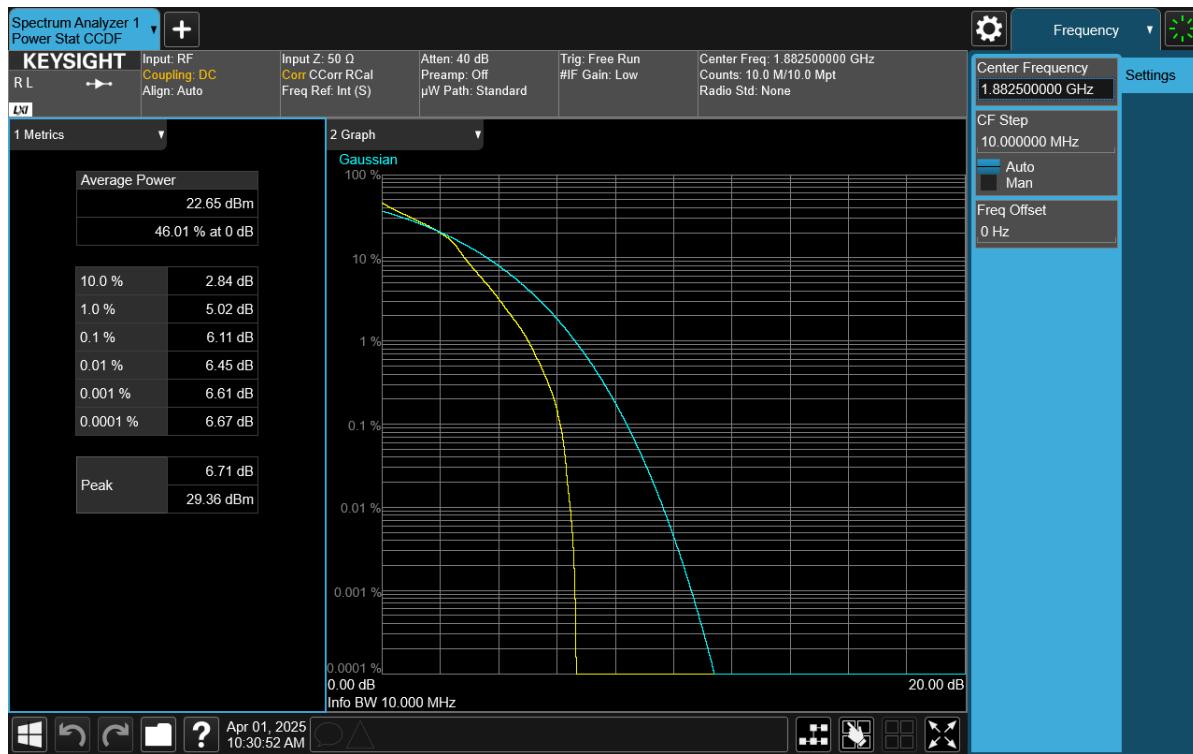
FCC ID: BCG-A3326	 element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 98 of 131	

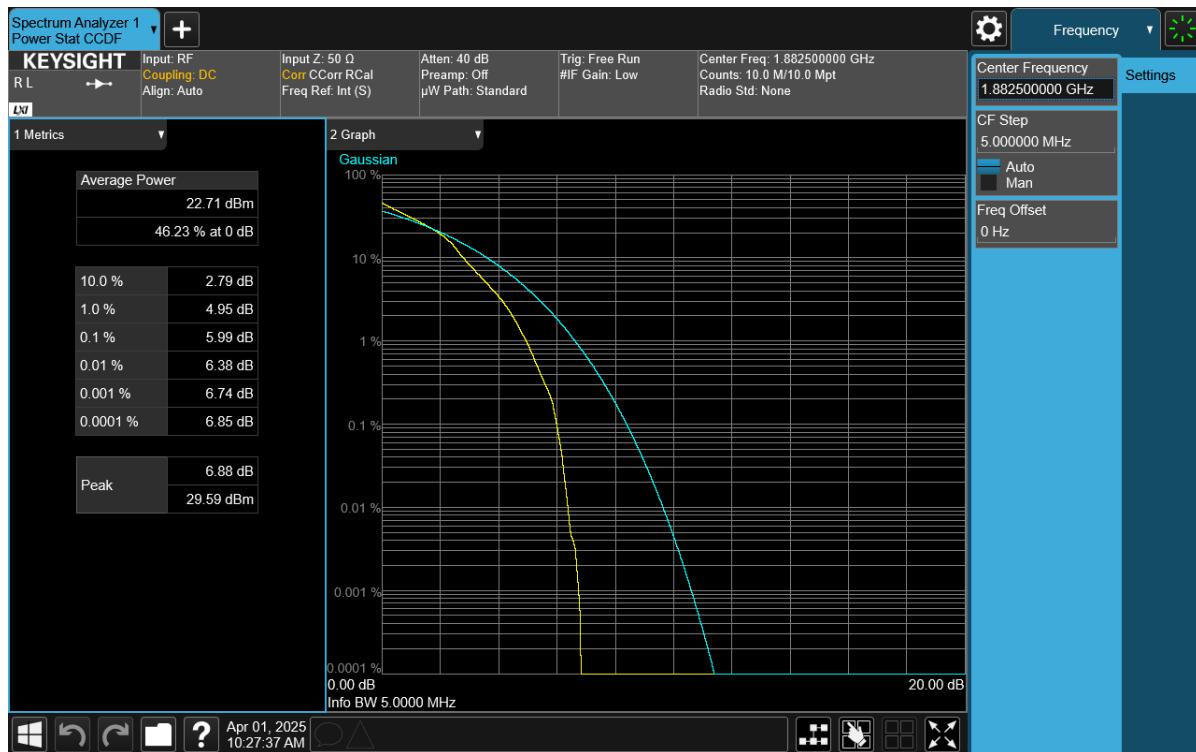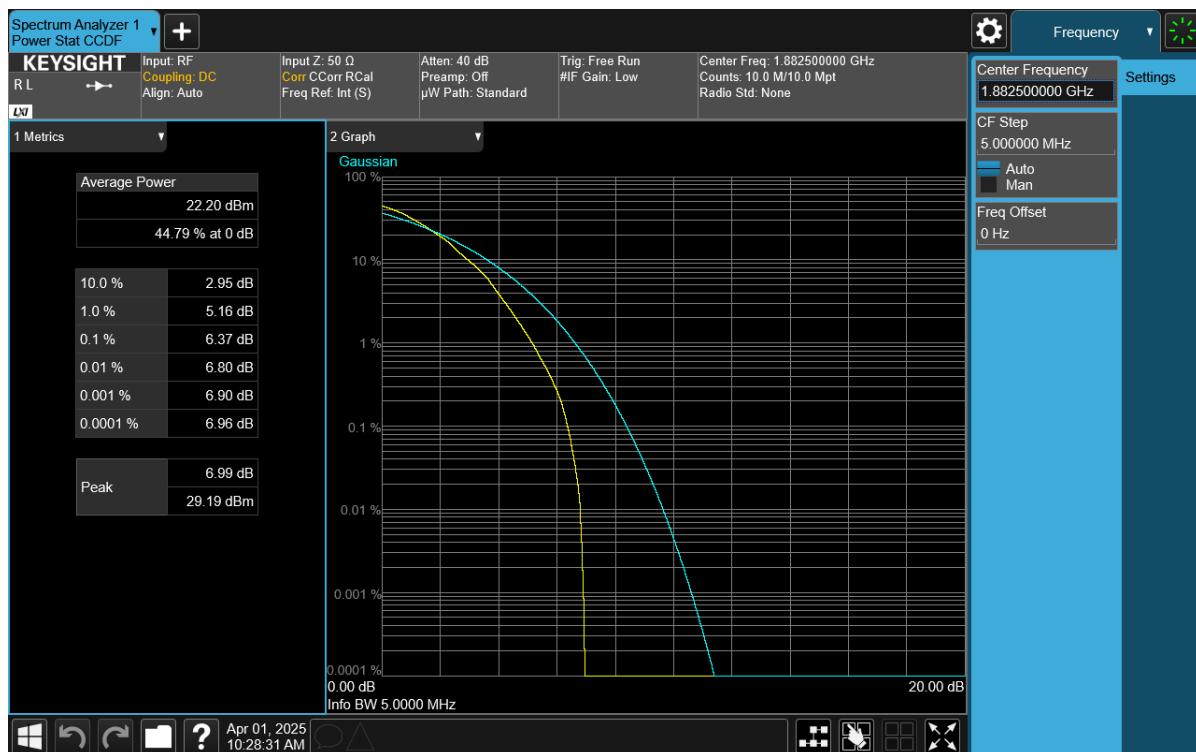
Plot 7-153. PAR Plot (NR Band n25 - 5MHz DFT-s-OFDM 16-QAM - Full RB)

Plot 7-154. PAR Plot (NR Band n25 - 5MHz DFT-s-OFDM 64-QAM - Full RB)

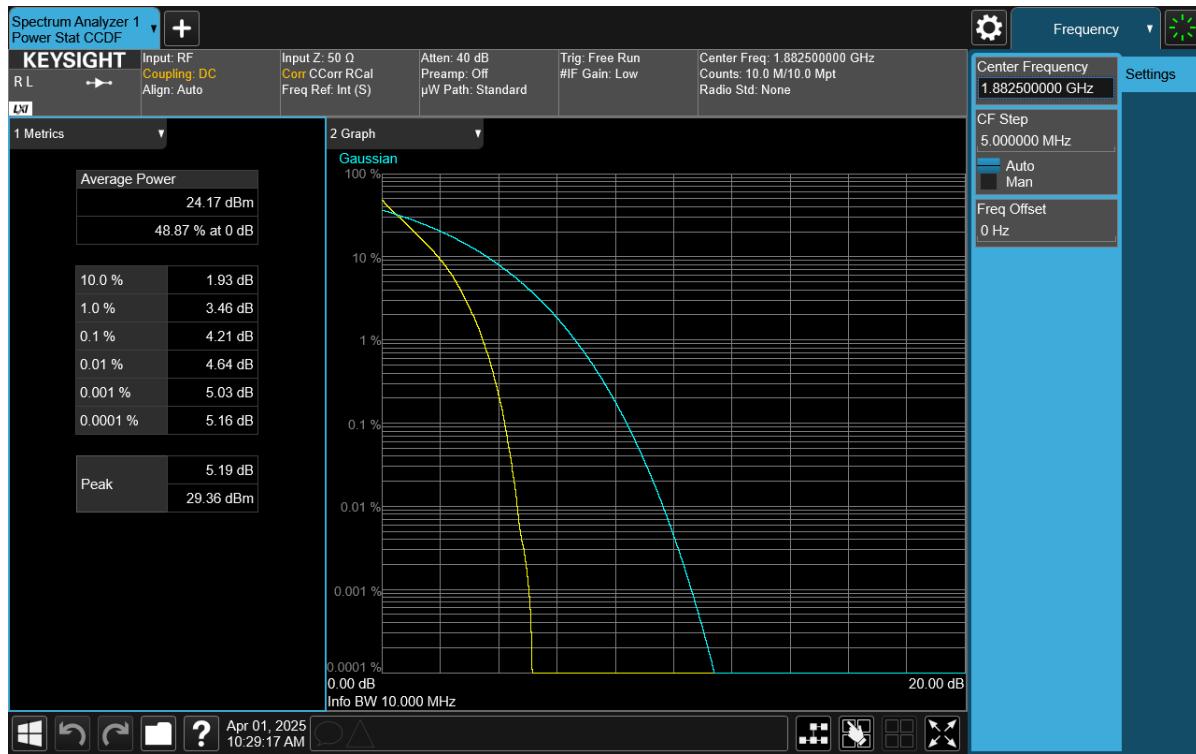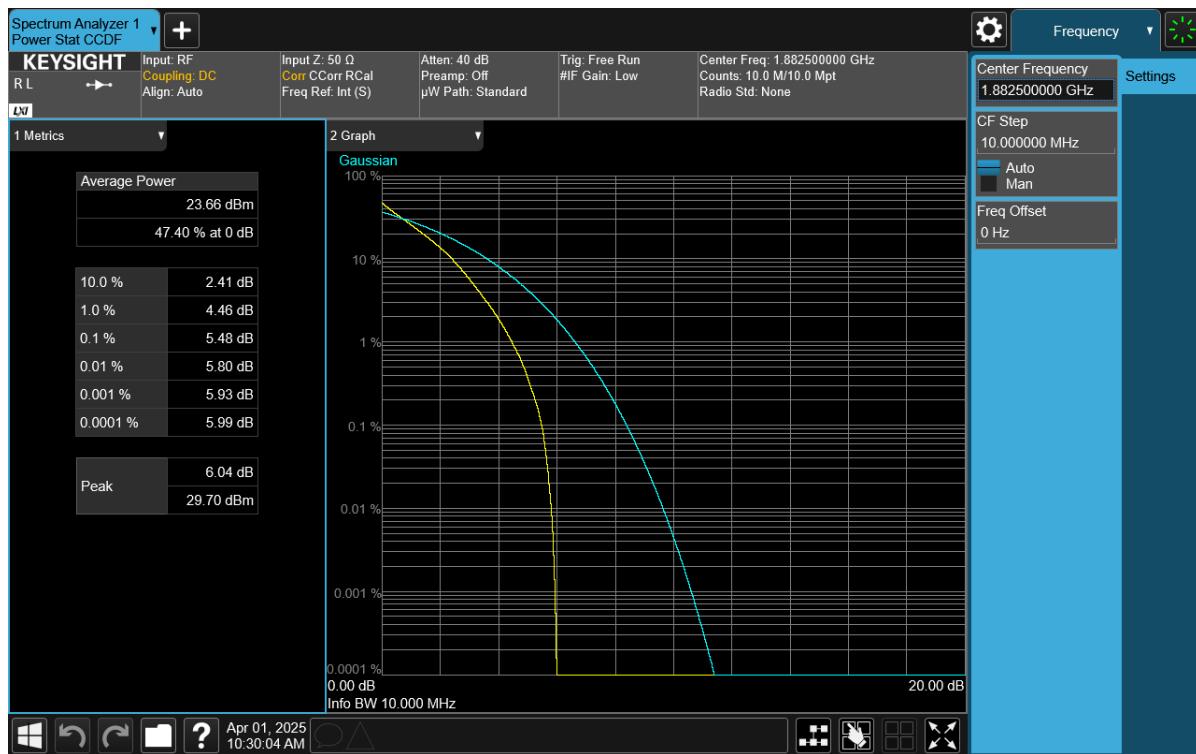
FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 99 of 131


Plot 7-155. PAR Plot (NR Band n25 - 10MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)

Plot 7-156. PAR Plot (NR Band n25 - 10MHz DFT-s-OFDM QPSK - Full RB)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 100 of 131


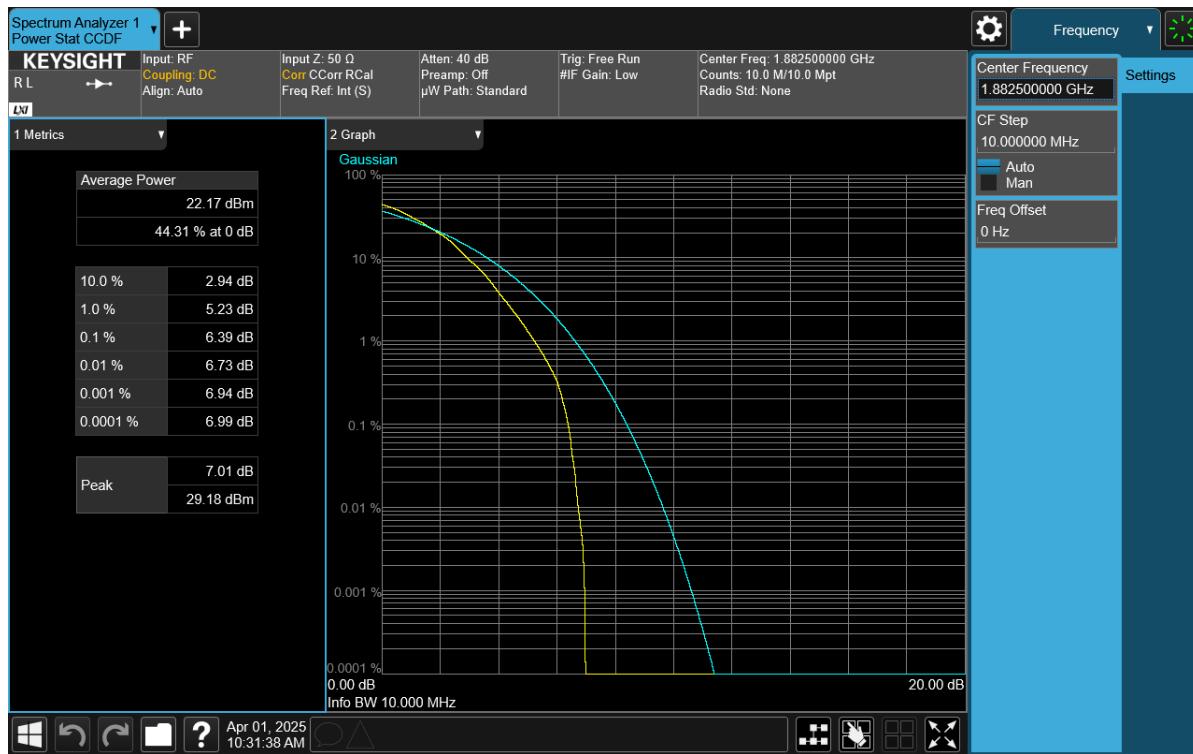


Plot 7-157. PAR Plot (NR Band n25 - 10MHz DFT-s-OFDM 16-QAM - Full RB)




Plot 7-158. PAR Plot (NR Band n25 - 10MHz DFT-s-OFDM 64-QAM - Full RB)


FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 101 of 131

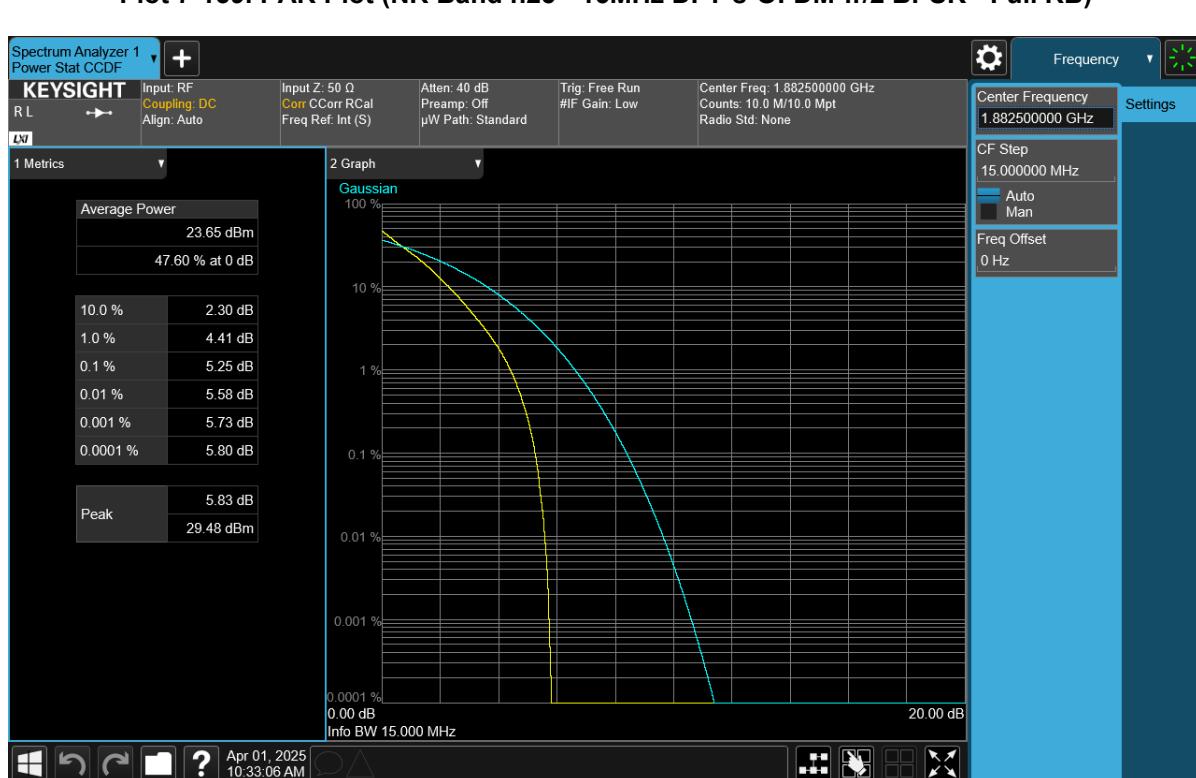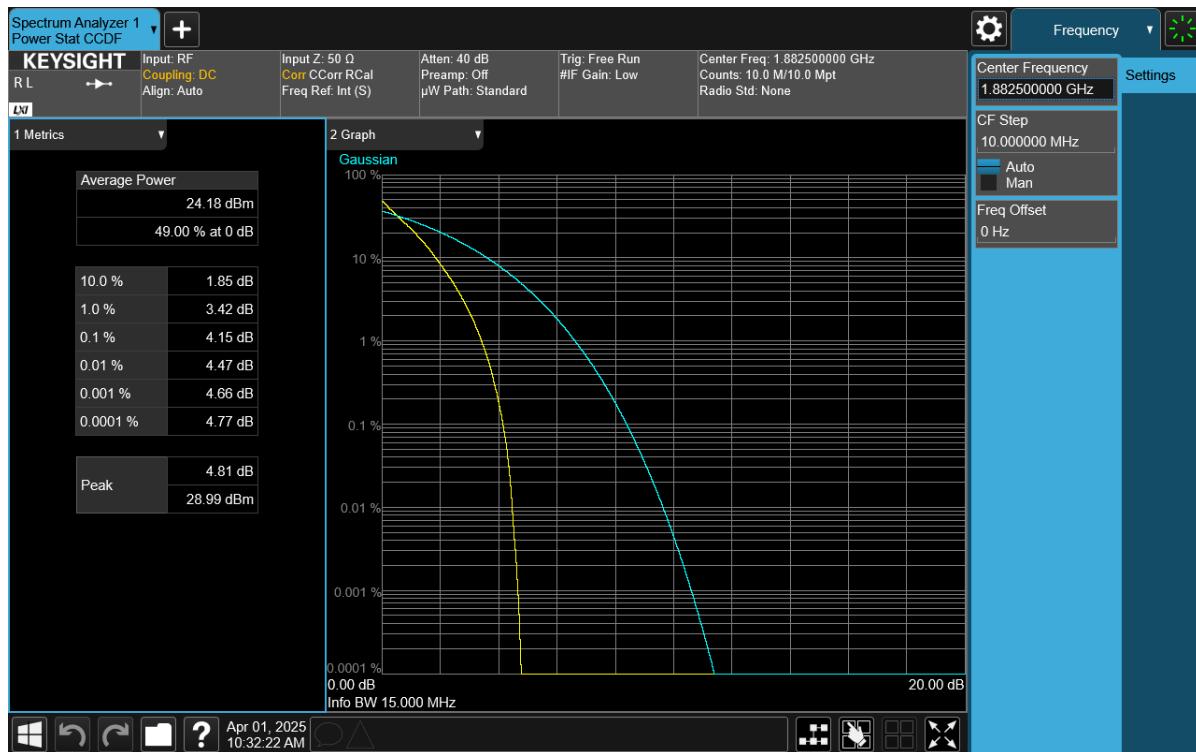

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 102 of 131	


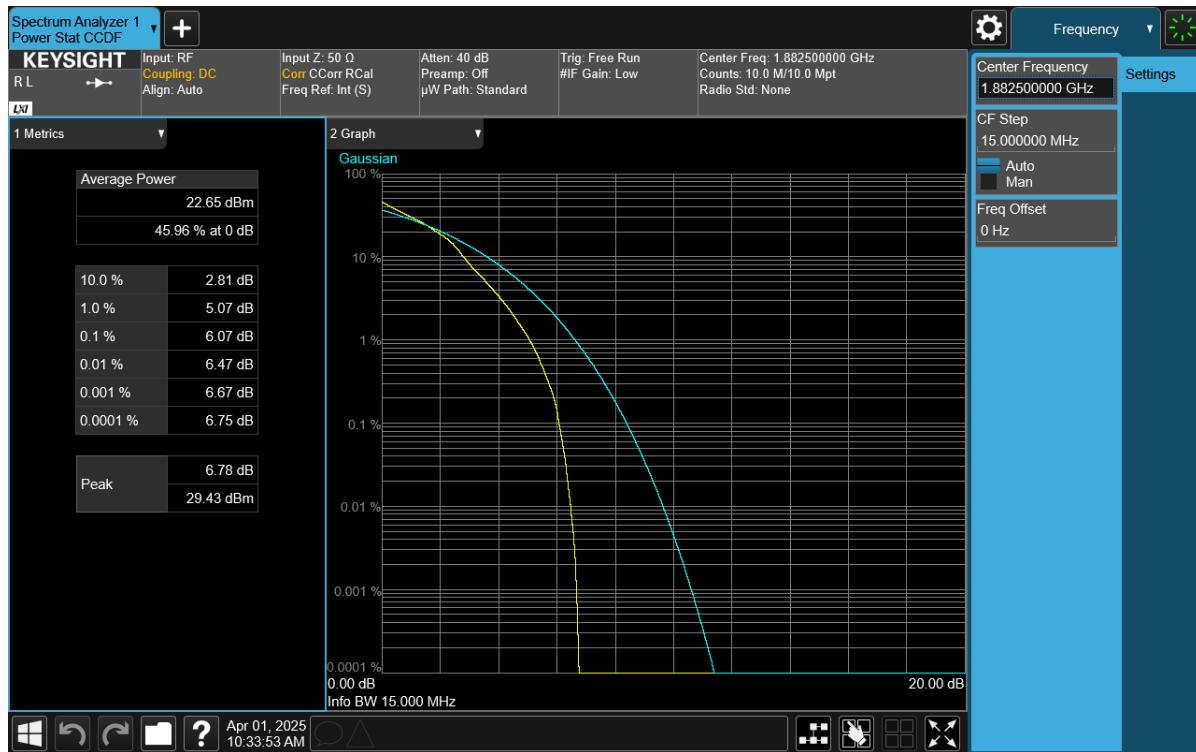


Plot 7-161. PAR Plot (NR Band n25 - 15MHz DFT-s-OFDM 16-QAM - Full RB)

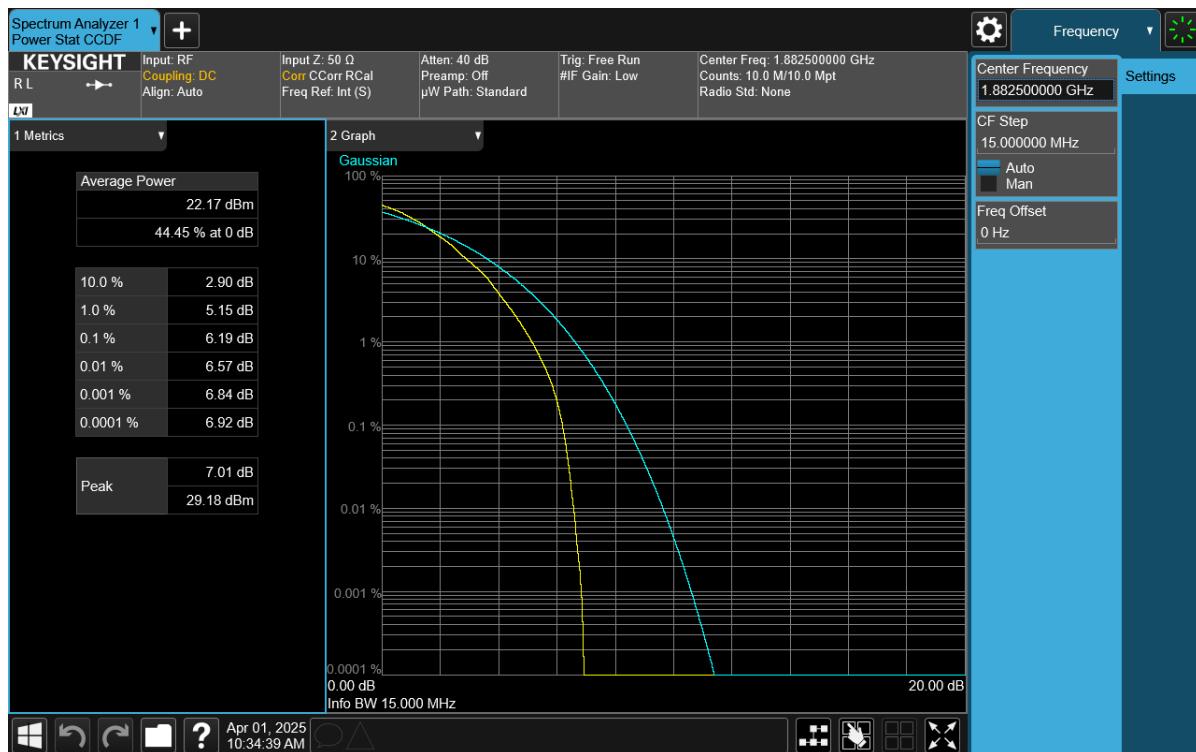


Plot 7-162. PAR Plot (NR Band n25 - 15MHz DFT-s-OFDM 64-QAM - Full RB)


FCC ID: BCG-A3326	 element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 103 of 131	

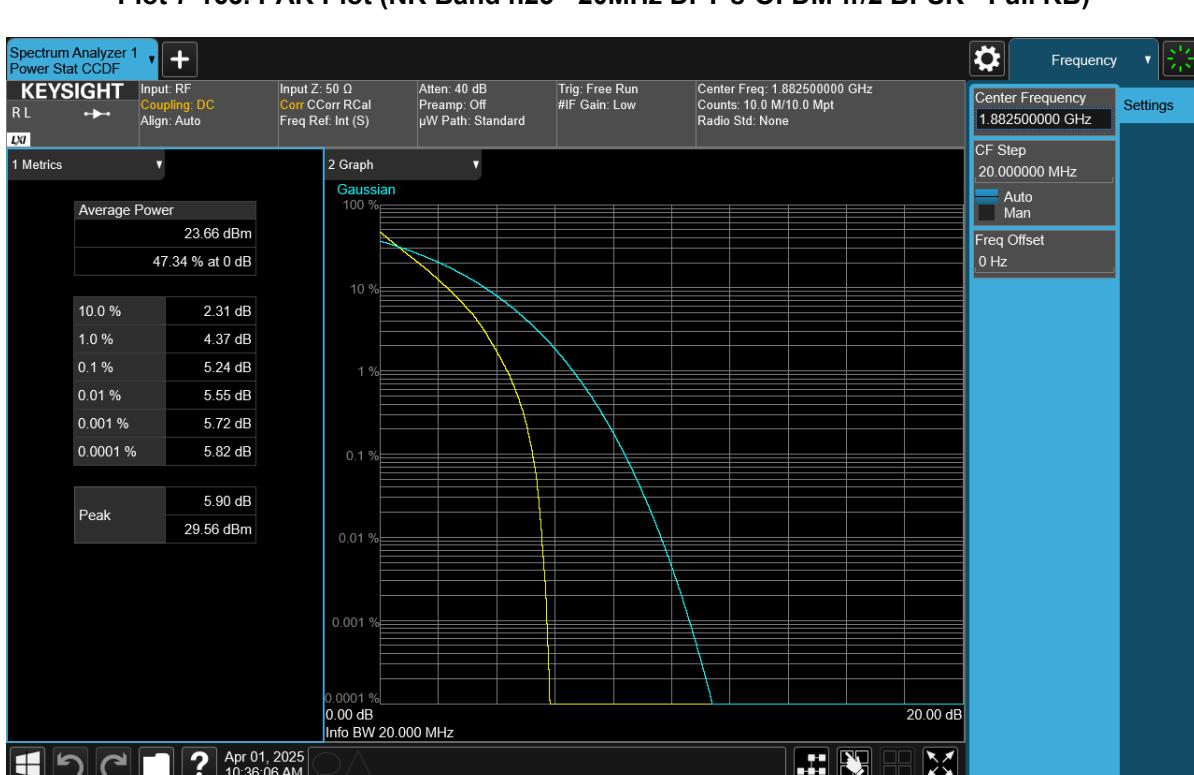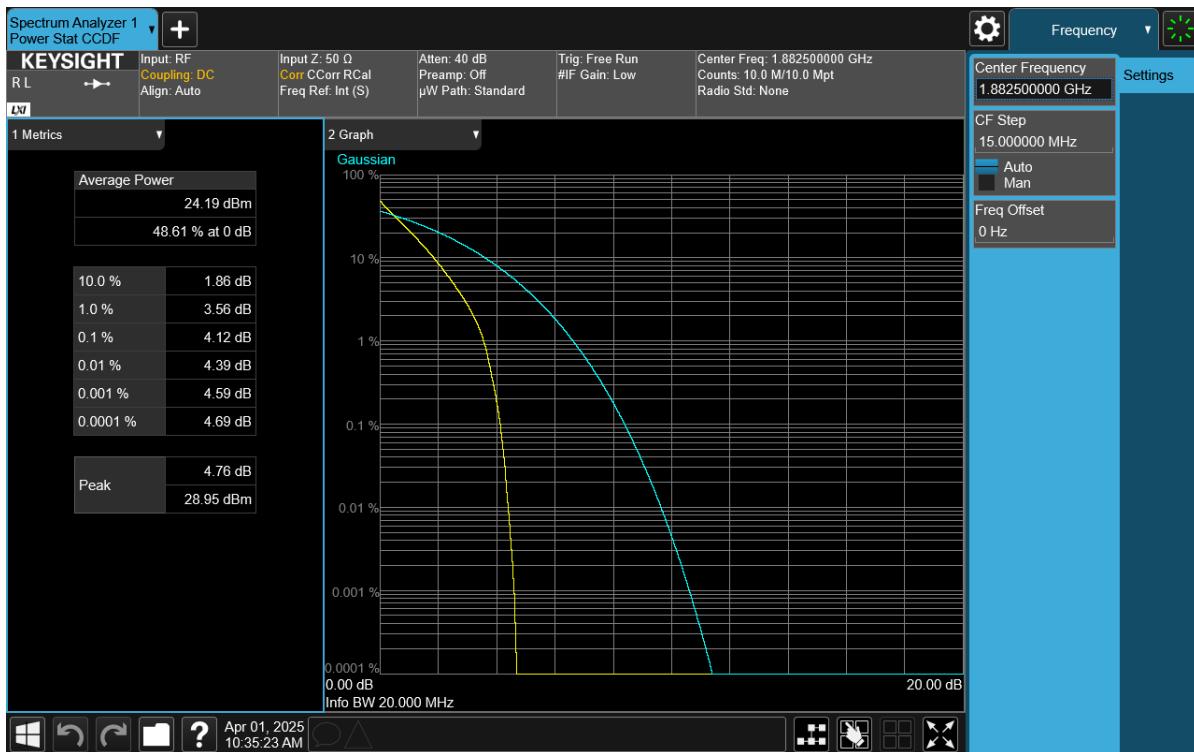

FCC ID: BCG-A3326	 element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 104 of 131


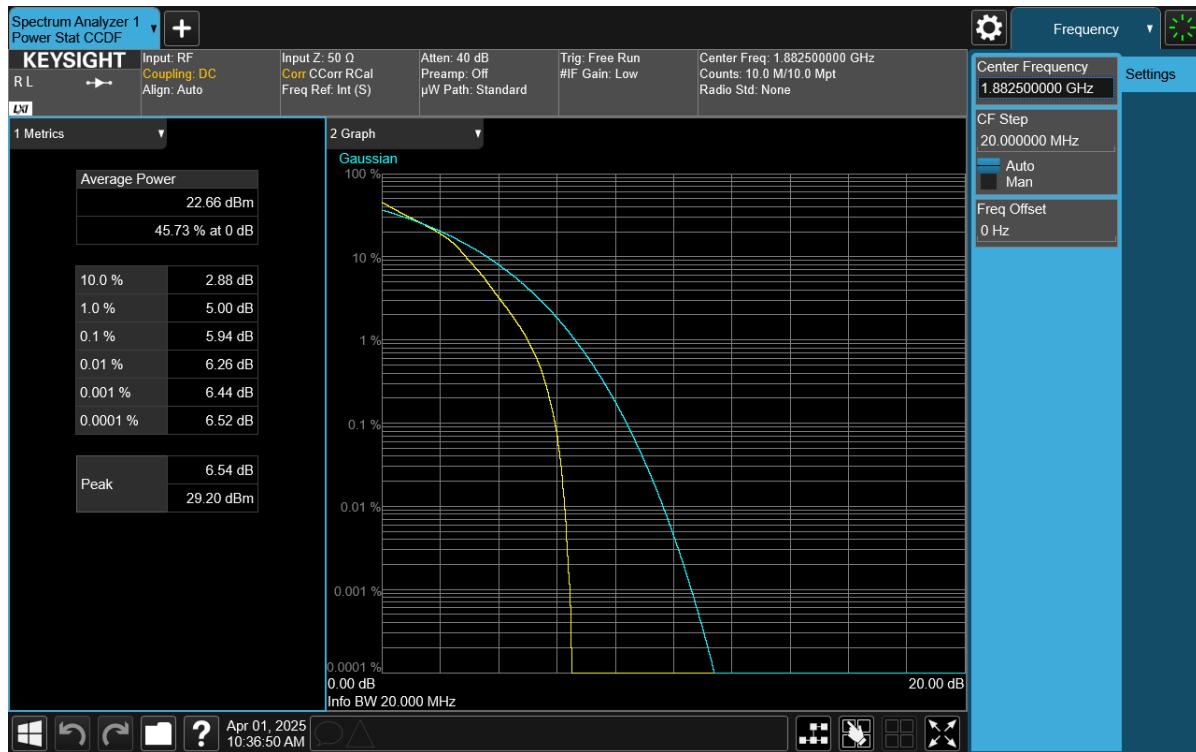


Plot 7-165. PAR Plot (NR Band n25 - 20MHz DFT-s-OFDM 16-QAM - Full RB)

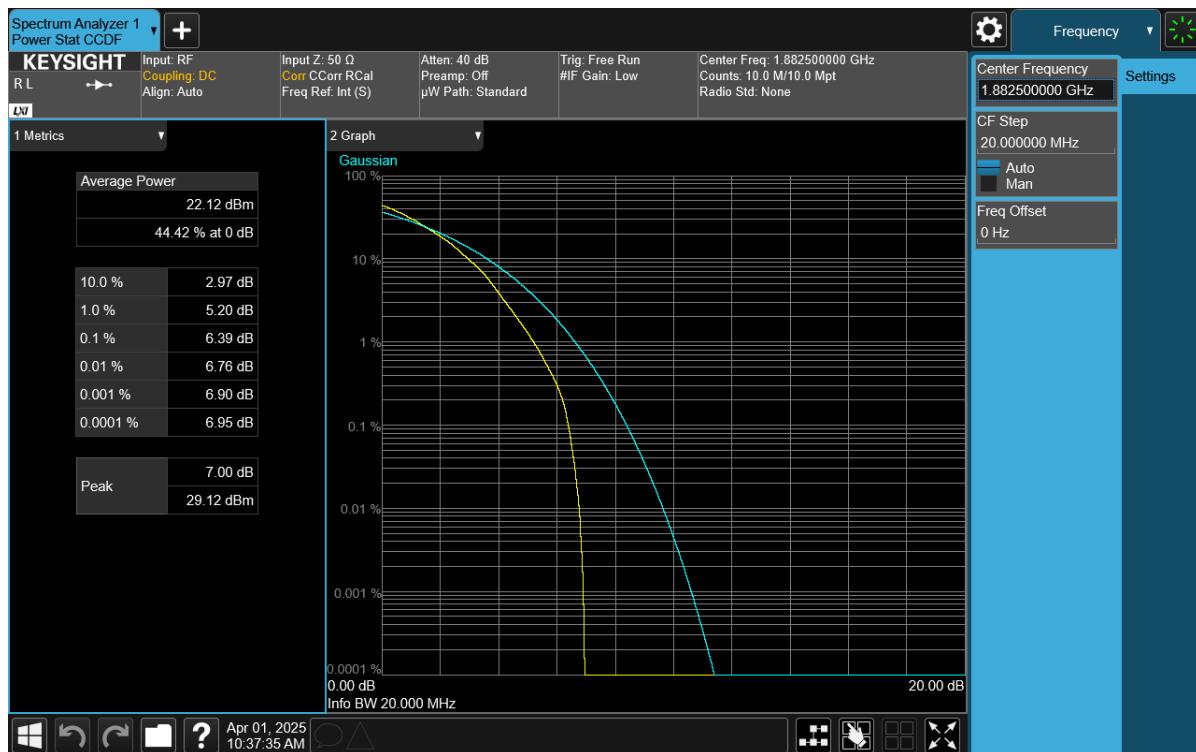


Plot 7-166. PAR Plot (NR Band n25 - 20MHz DFT-s-OFDM 64-QAM - Full RB)


FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 105 of 131

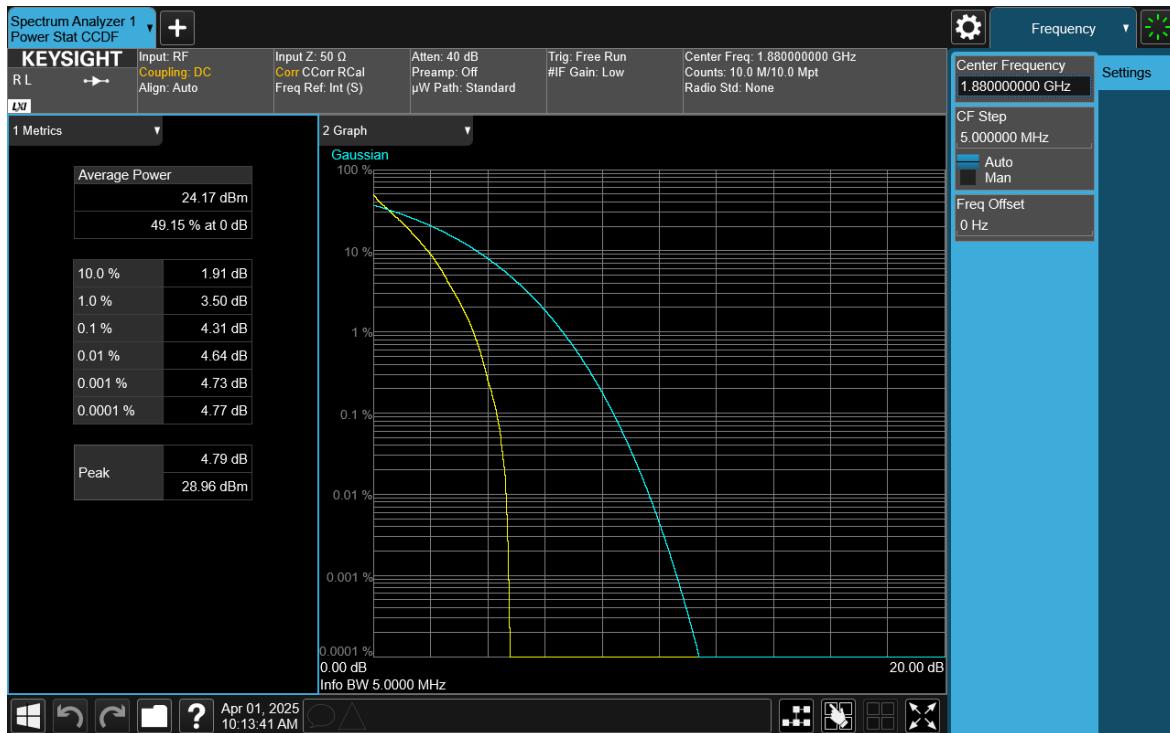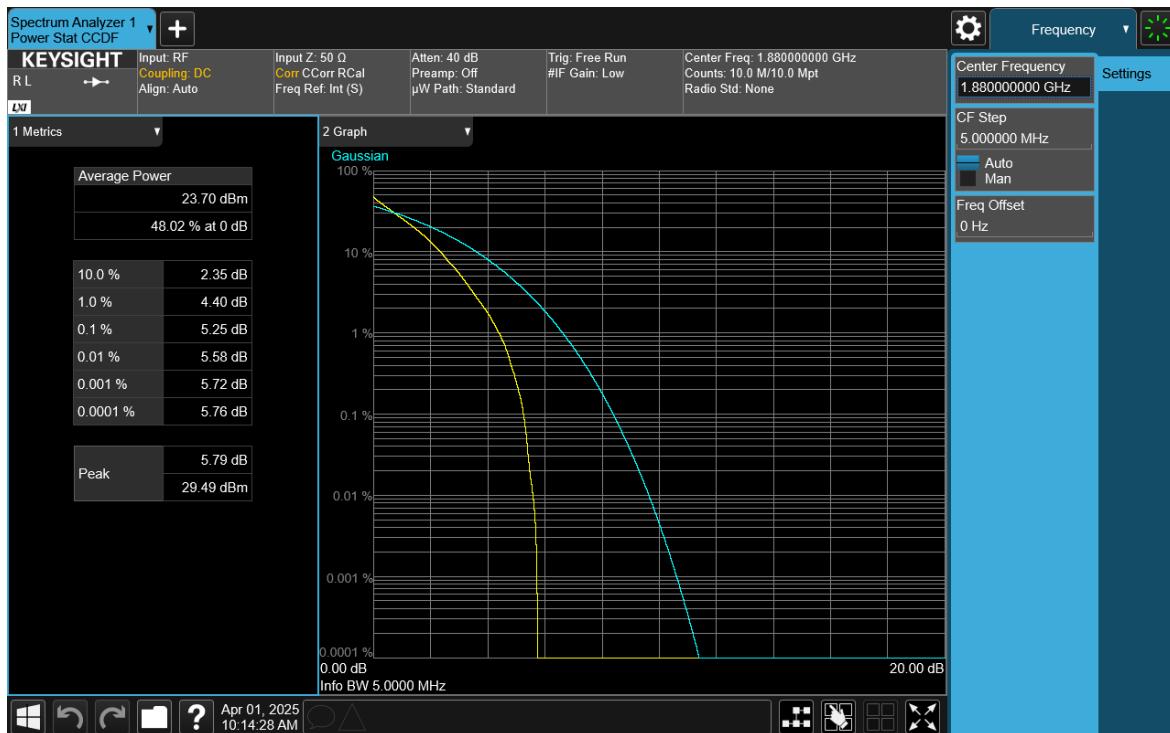NR Band n2

Plot 7-167. PAR Plot (NR Band n2 - 5MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)

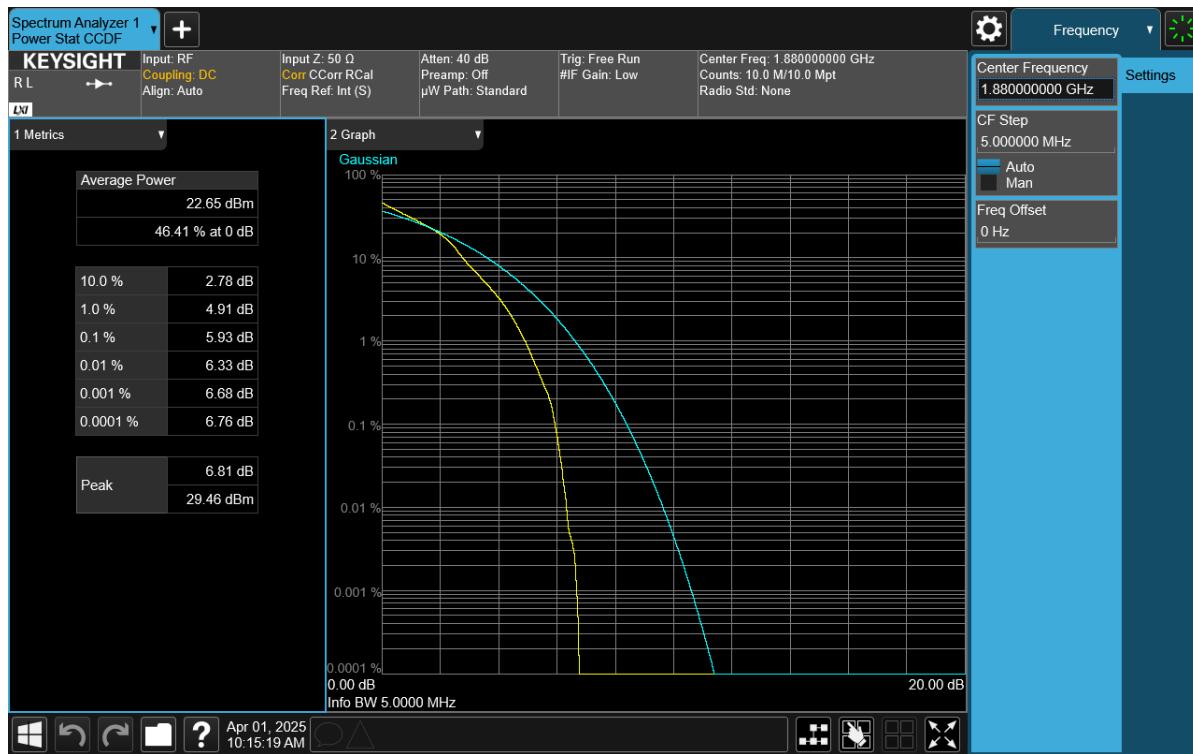Plot 7-168. PAR Plot (NR Band n2 - 5MHz DFT-s-OFDM QPSK - Full RB)

FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 106 of 131

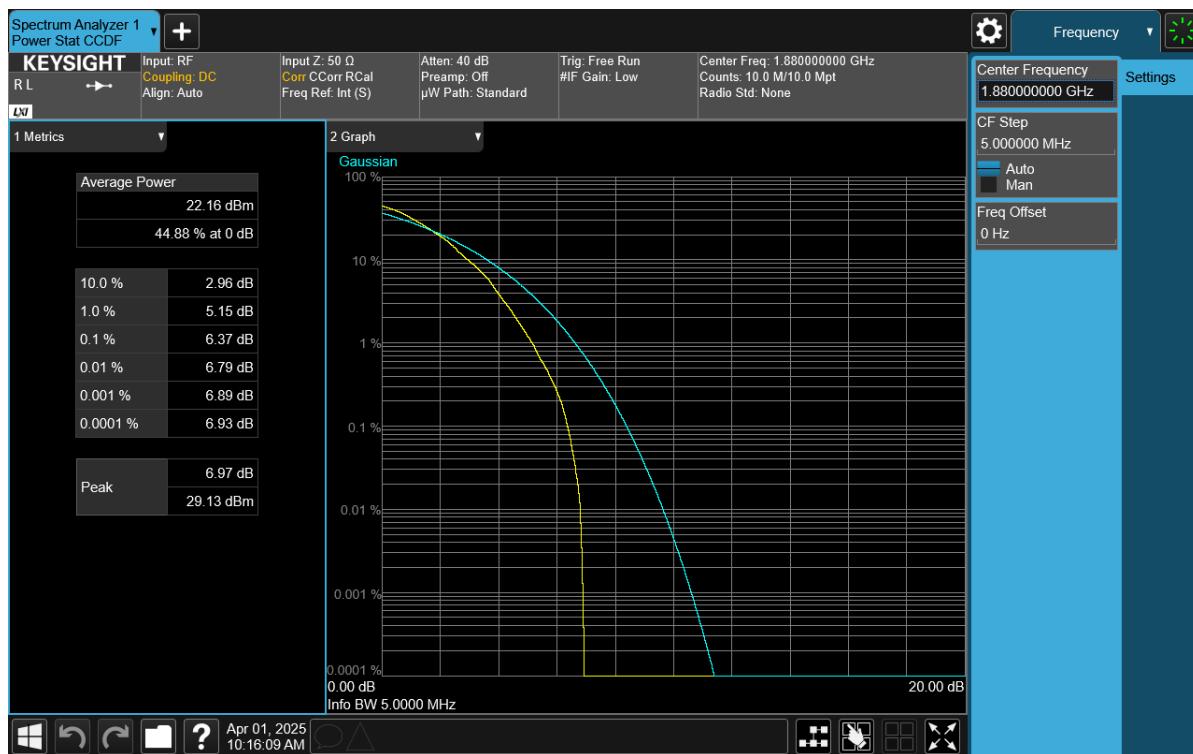


Plot 7-169. PAR Plot (NR Band n2 - 5MHz DFT-s-OFDM 16-QAM - Full RB)




Plot 7-170. PAR Plot (NR Band n2 - 5MHz DFT-s-OFDM 64-QAM - Full RB)

FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 107 of 131	


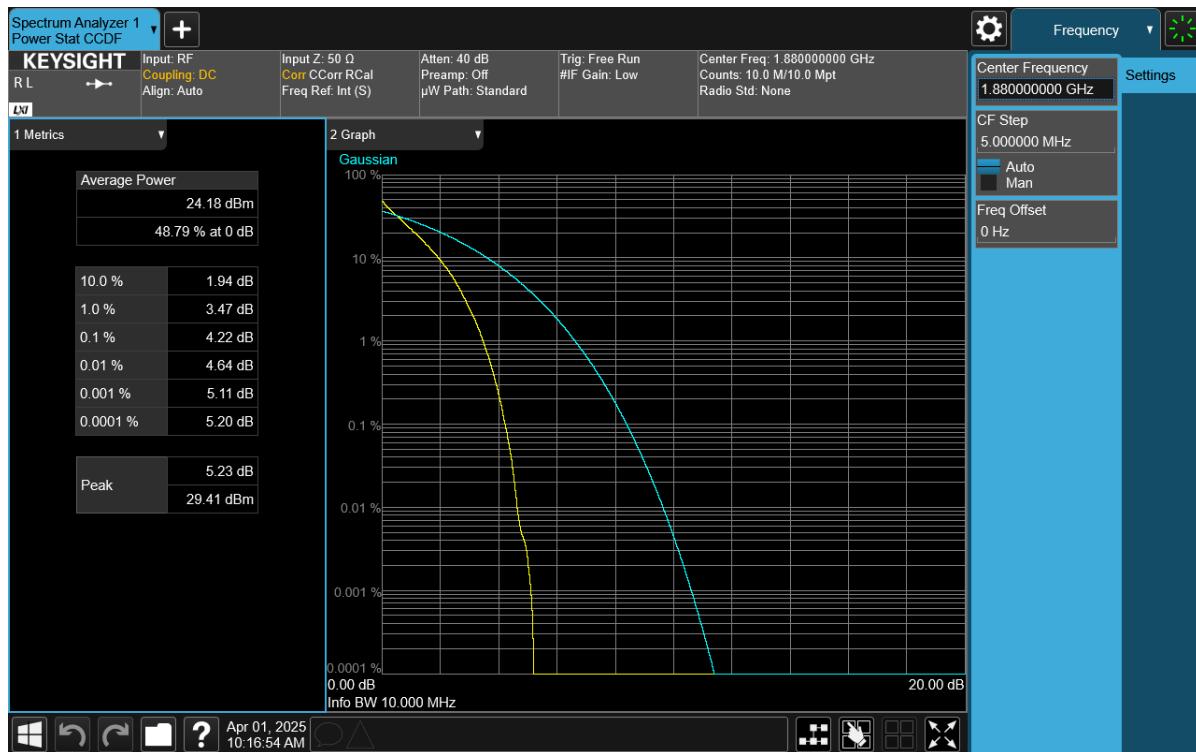


Plot 7-171. PAR Plot (NR Band n2 - 10MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)

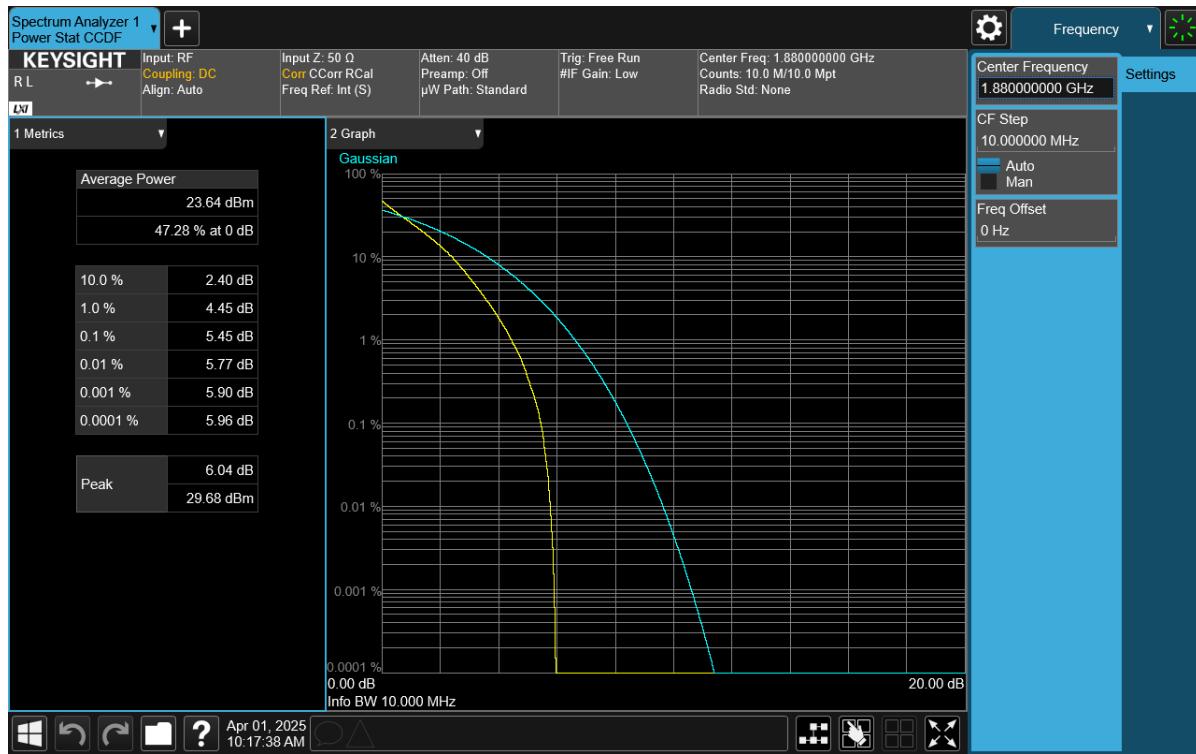


Plot 7-172. PAR Plot (NR Band n2 - 10MHz DFT-s-OFDM QPSK - Full RB)


FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 108 of 131

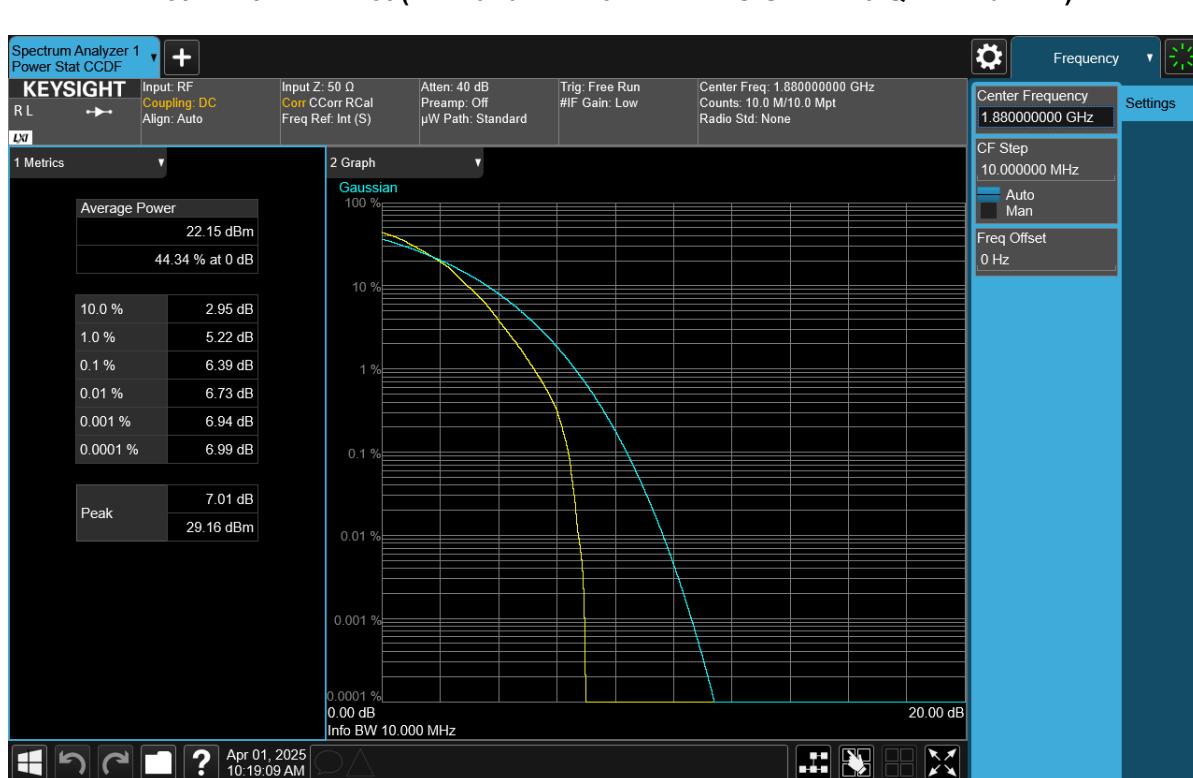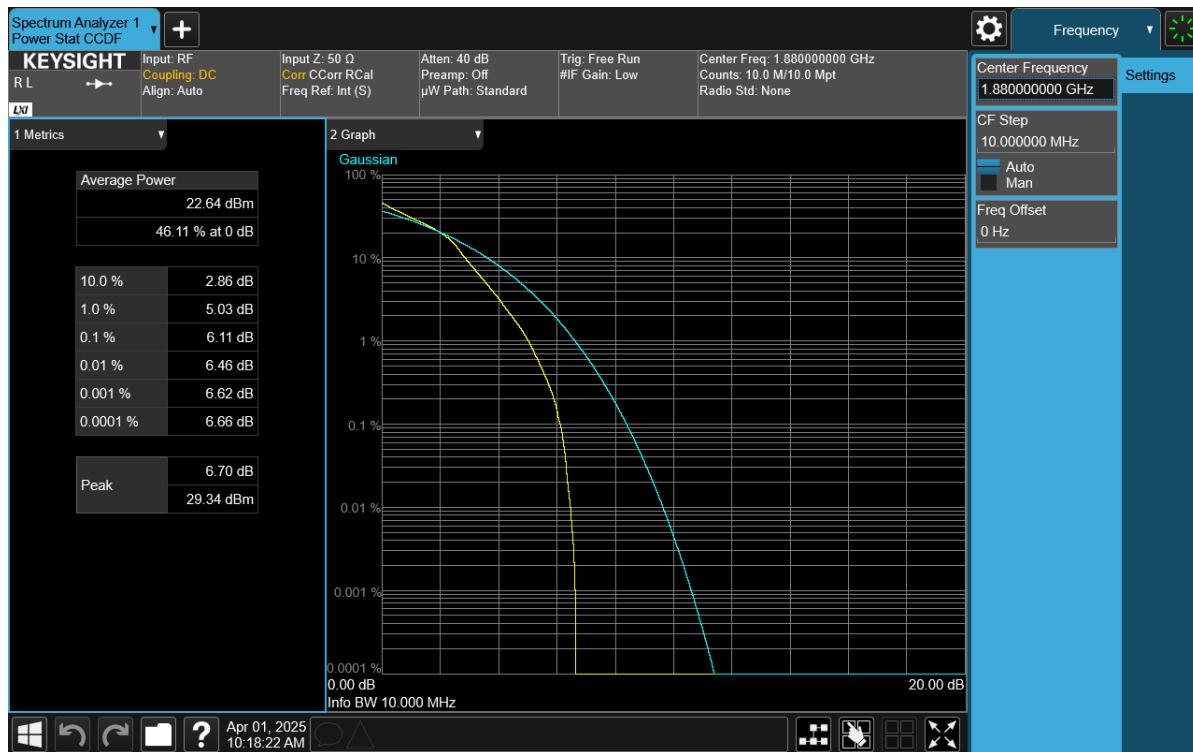

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 109 of 131

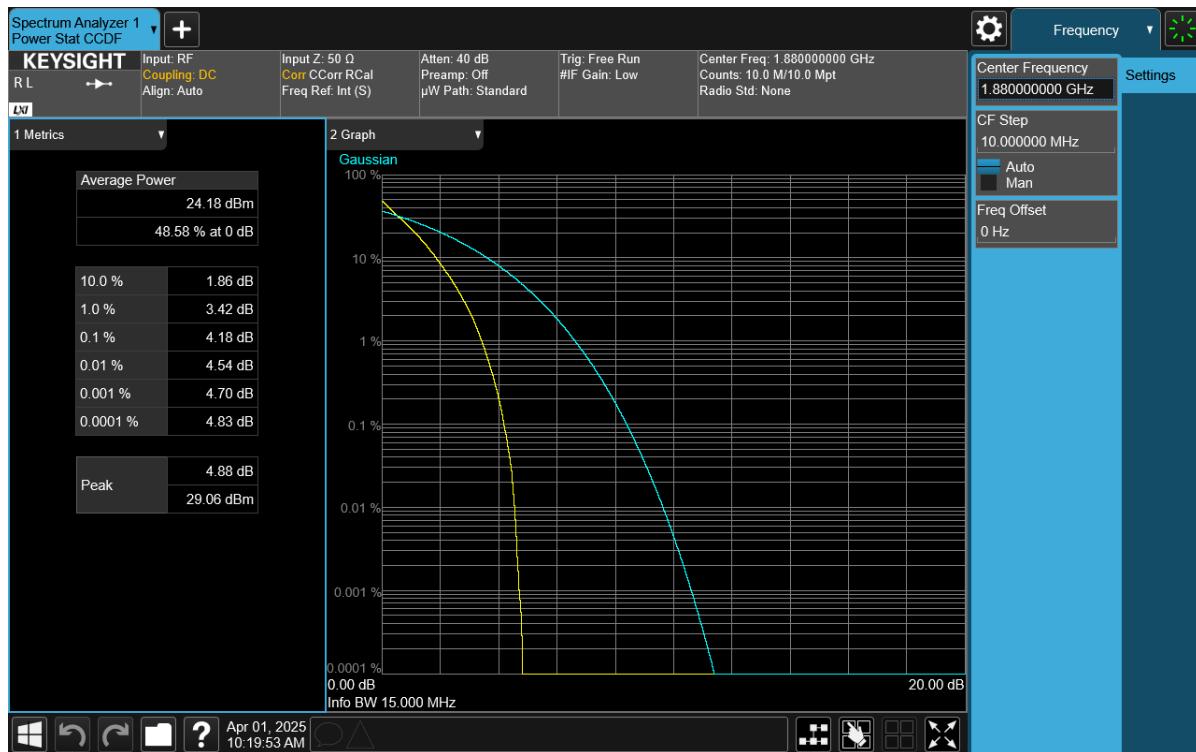


Plot 7-175. PAR Plot (NR Band n2 - 15MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)

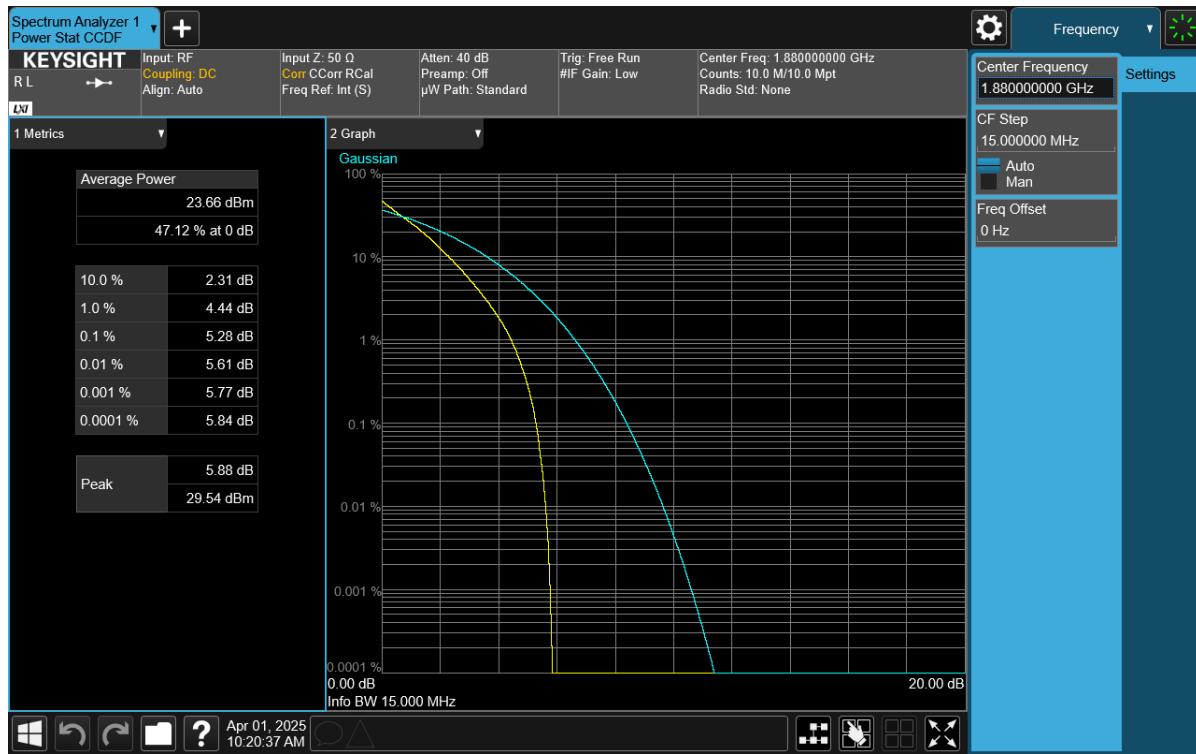


Plot 7-176. PAR Plot (NR Band n2 - 15MHz DFT-s-OFDM QPSK - Full RB)

FCC ID: BCG-A3326	 element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 110 of 131	

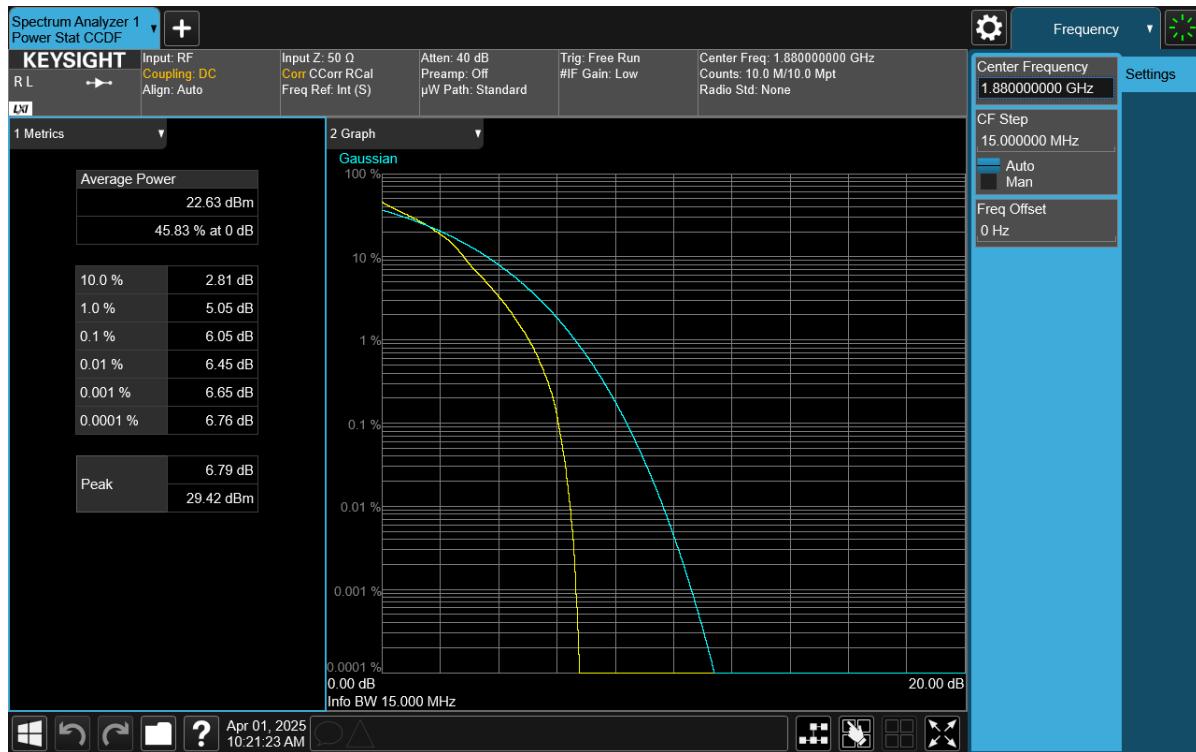


Plot 7-177. PAR Plot (NR Band n2 - 15MHz DFT-s-OFDM 16-QAM - Full RB)

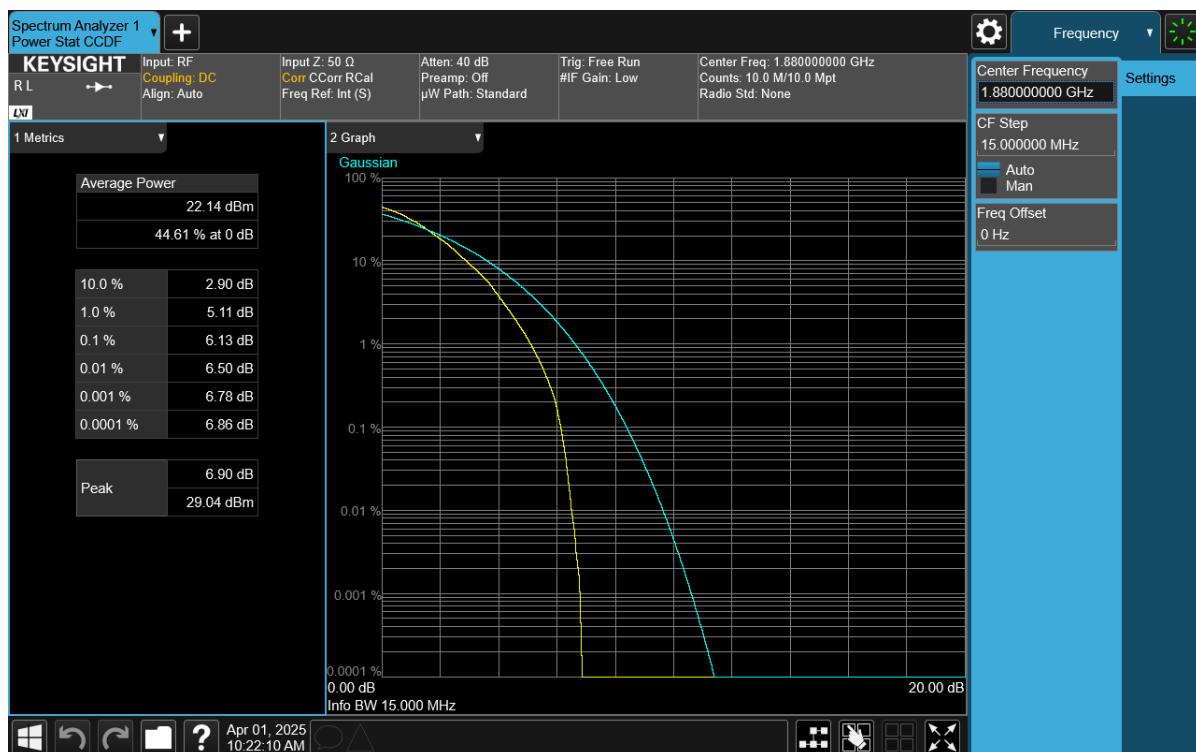


Plot 7-178. PAR Plot (NR Band n2 - 15MHz DFT-s-OFDM 64-QAM - Full RB)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 111 of 131

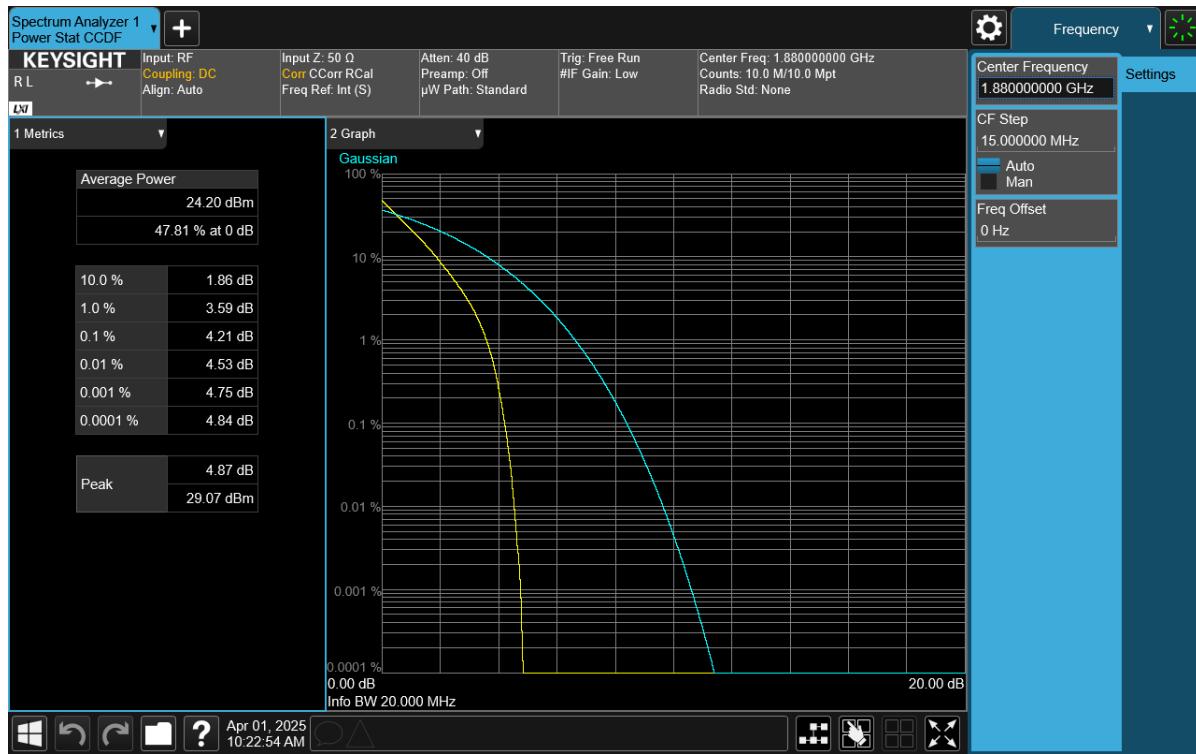


Plot 7-179. PAR Plot (NR Band n2 - 20MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)

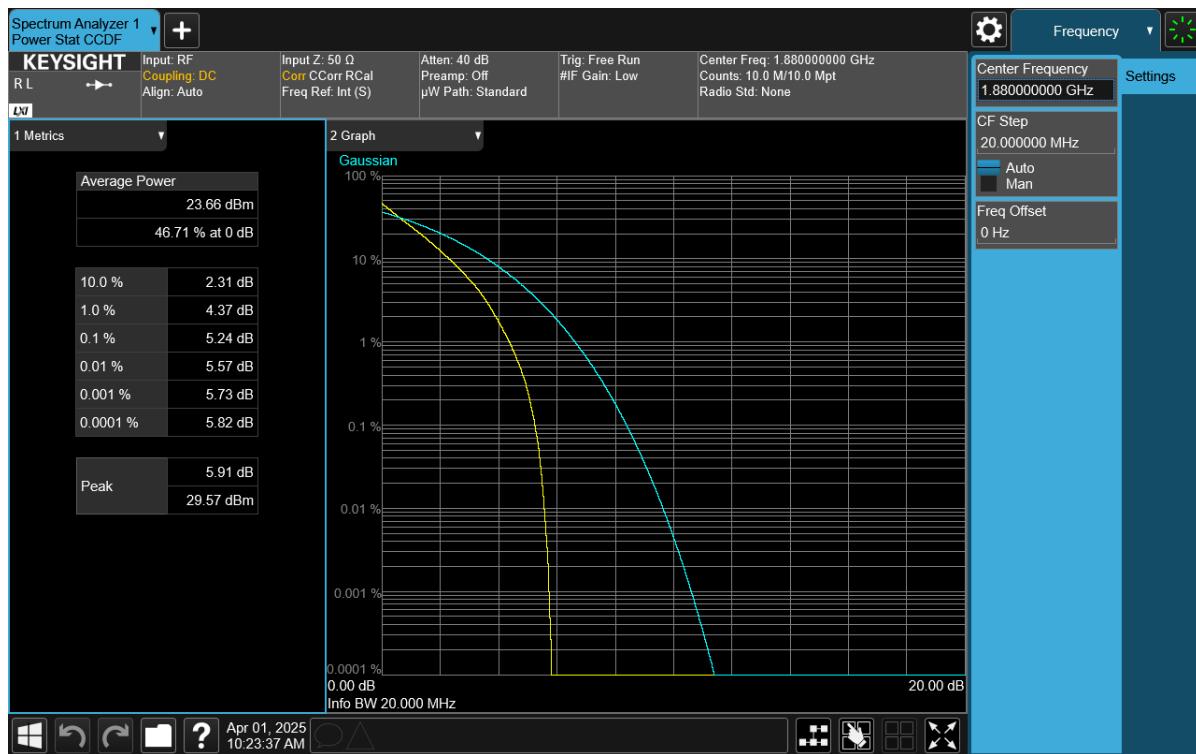


Plot 7-180. PAR Plot (NR Band n2 - 20MHz DFT-s-OFDM QPSK - Full RB)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 112 of 131

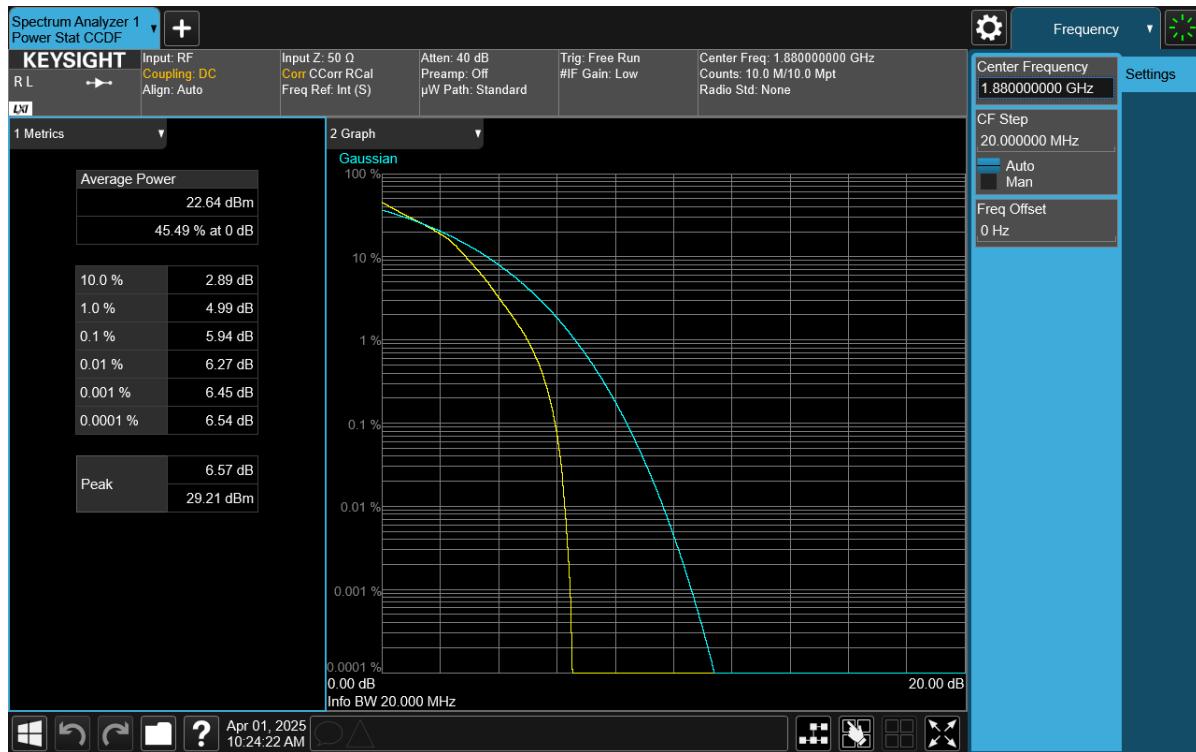

Plot 7-181. PAR Plot (NR Band n2 - 20MHz DFT-s-OFDM 16-QAM - Full RB)

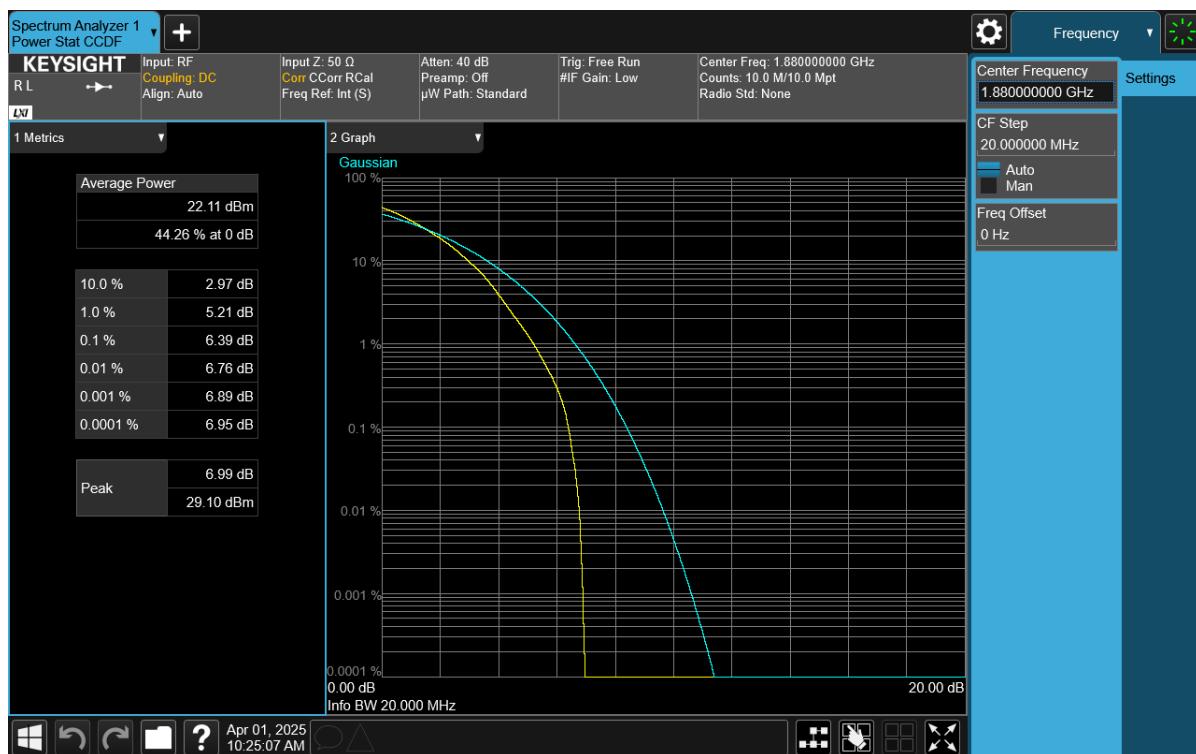

Plot 7-182. PAR Plot (NR Band n2 - 20MHz DFT-s-OFDM 64-QAM - Full RB)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 113 of 131

7.6 Radiated Power (EIRP)

§24.232(c)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1
 ANSI C63.26-2015 – Section 5.2.5.5

Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

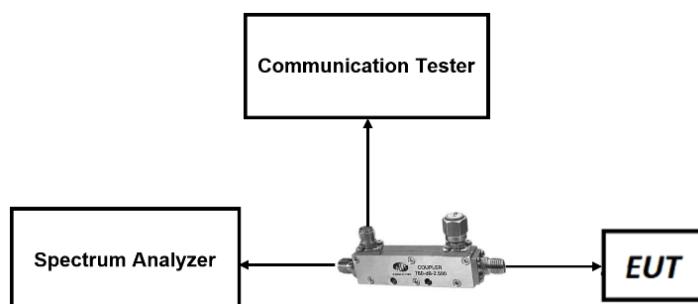


Figure 7-9. LTE Test Instrument & Measurement Setup

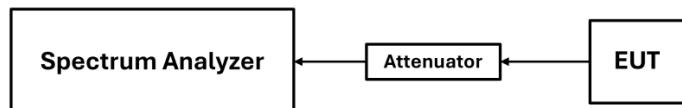


Figure 7-10. FR1 Test Instrument & Measurement Setup

FCC ID: BCG-A3326	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 114 of 131

Test Notes

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.
3. The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
4. The Ant. Gains (GT) are listed in dBi.
5. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 115 of 131

7.6.1 Antenna FCM – EIRP

LTE Band 25

Bandwidth	Modulation	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1850.7	-12.00	1 / 5	24.94	12.94	19.679	33.01	-20.07
		1882.5	-12.00	1 / 0	25.02	13.02	20.045	33.01	-19.99
		1914.3	-12.00	1 / 5	25.20	13.20	20.893	33.01	-19.81
	16-QAM	1882.5	-12.00	1 / 0	24.45	12.45	17.579	33.01	-20.56
3 MHz	QPSK	1851.5	-12.00	1 / 0	25.18	13.18	20.797	33.01	-19.83
		1882.5	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1913.5	-12.00	1 / 0	25.10	13.10	20.417	33.01	-19.91
	16-QAM	1882.5	-12.00	1 / 0	24.41	12.41	17.418	33.01	-20.60
5 MHz	QPSK	1852.5	-12.00	1 / 24	25.14	13.14	20.606	33.01	-19.87
		1882.5	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1912.5	-12.00	1 / 0	24.97	12.97	19.815	33.01	-20.04
	16-QAM	1882.5	-12.00	1 / 12	24.60	12.60	18.197	33.01	-20.41
10 MHz	QPSK	1855.0	-12.00	1 / 0	25.14	13.14	20.606	33.01	-19.87
		1882.5	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1910.0	-12.00	1 / 0	25.13	13.13	20.559	33.01	-19.88
	16-QAM	1882.5	-12.00	1 / 0	24.37	12.37	17.258	33.01	-20.64
15 MHz	QPSK	1857.5	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1882.5	-12.00	1 / 37	25.03	13.03	20.091	33.01	-19.98
		1907.5	-12.00	1 / 0	24.98	12.98	19.861	33.01	-20.03
	16-QAM	1882.5	-12.00	1 / 37	24.38	12.38	17.298	33.01	-20.63
20 MHz	QPSK	1860.0	-12.00	1 / 0	25.15	13.15	20.654	33.01	-19.86
		1882.5	-12.00	1 / 50	24.99	12.99	19.907	33.01	-20.02
		1905.0	-12.00	1 / 99	25.20	13.20	20.893	33.01	-19.81
	16-QAM	1905.0	-12.00	1 / 50	24.57	12.57	18.072	33.01	-20.44

Table 7-2. Antenna FCM EIRP Data (LTE Band 25)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 116 of 131	

LTE Band 2

Bandwidth	Modulation	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1850.7	-12.00	1 / 0	25.03	13.03	20.091	33.01	-19.98
		1880.0	-12.00	1 / 5	25.11	13.11	20.464	33.01	-19.90
		1909.3	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
	16-QAM	1880.0	-12.00	1 / 0	24.48	12.48	17.701	33.01	-20.53
3 MHz	QPSK	1851.5	-12.00	1 / 0	25.10	13.10	20.417	33.01	-19.91
		1880.0	-12.00	1 / 14	25.10	13.10	20.417	33.01	-19.91
		1908.5	-12.00	1 / 0	25.05	13.05	20.184	33.01	-19.96
	16-QAM	1880.0	-12.00	1 / 14	24.48	12.48	17.701	33.01	-20.53
5 MHz	QPSK	1852.5	-12.00	1 / 12	25.13	13.13	20.559	33.01	-19.88
		1880.0	-12.00	1 / 24	25.20	13.20	20.893	33.01	-19.81
		1907.5	-12.00	1 / 0	25.06	13.06	20.230	33.01	-19.95
	16-QAM	1880.0	-12.00	1 / 12	24.65	12.65	18.408	33.01	-20.36
10 MHz	QPSK	1855.0	-12.00	1 / 0	25.03	13.03	20.091	33.01	-19.98
		1880.0	-12.00	1 / 25	25.08	13.08	20.324	33.01	-19.93
		1905.0	-12.00	1 / 25	25.05	13.05	20.184	33.01	-19.96
	16-QAM	1880.0	-12.00	1 / 49	24.40	12.40	17.378	33.01	-20.61
15 MHz	QPSK	1857.5	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1880.0	-12.00	1 / 74	25.12	13.12	20.512	33.01	-19.89
		1902.5	-12.00	1 / 0	25.08	13.08	20.324	33.01	-19.93
	16-QAM	1880.0	-12.00	1 / 37	24.42	12.42	17.458	33.01	-20.59
20 MHz	QPSK	1860.0	-12.00	1 / 99	25.13	13.13	20.559	33.01	-19.88
		1880.0	-12.00	1 / 50	24.95	12.95	19.724	33.01	-20.06
		1900.0	-12.00	1 / 0	25.13	13.13	20.559	33.01	-19.88
	16-QAM	1880.0	-12.00	1 / 50	24.61	12.61	18.239	33.01	-20.40

Table 7-3. Antenna FCM EIRP Data (LTE Band 2)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch				

NR Band n25

Bandwidth	Modulation	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
5 MHz	π/2 BPSK	1852.5	-12.00	1 / 23	25.20	13.20	20.893	33.01	-19.81
		1882.5	-12.00	1 / 0	25.03	13.03	20.091	33.01	-19.98
		1912.5	-12.00	1 / 0	25.04	13.04	20.137	33.01	-19.97
	QPSK	1852.5	-12.00	1 / 12	25.01	13.01	19.999	33.01	-20.00
		1882.5	-12.00	1 / 23	25.10	13.10	20.417	33.01	-19.91
		1912.5	-12.00	1 / 0	24.93	12.93	19.634	33.01	-20.08
	16-QAM	1852.5	-12.00	1 / 23	24.21	12.21	16.634	33.01	-20.80
		1912.5	-12.00	1 / 0	23.07	11.07	12.794	33.01	-21.94
	π/2 BPSK	1855.0	-12.00	1 / 0	25.09	13.09	20.370	33.01	-19.92
		1882.5	-12.00	1 / 48	25.11	13.11	20.464	33.01	-19.90
		1910.0	-12.00	1 / 48	24.92	12.92	19.588	33.01	-20.09
10 MHz	QPSK	1855.0	-12.00	1 / 48	25.16	13.16	20.701	33.01	-19.85
		1882.5	-12.00	1 / 48	25.05	13.05	20.184	33.01	-19.96
		1910.0	-12.00	1 / 25	25.20	13.20	20.893	33.01	-19.81
	16-QAM	1882.5	-12.00	1 / 0	24.18	12.18	16.520	33.01	-20.83
		1882.5	-12.00	1 / 0	23.10	11.10	12.882	33.01	-21.91
	π/2 BPSK	1857.5	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1882.5	-12.00	1 / 37	25.14	13.14	20.606	33.01	-19.87
		1907.5	-12.00	1 / 73	25.05	13.05	20.184	33.01	-19.96
15 MHz	QPSK	1857.5	-12.00	1 / 37	25.17	13.17	20.749	33.01	-19.84
		1882.5	-12.00	1 / 0	24.91	12.91	19.543	33.01	-20.10
		1907.5	-12.00	1 / 37	24.79	12.79	19.011	33.01	-20.22
	16-QAM	1907.5	-12.00	1 / 0	24.09	12.09	16.181	33.01	-20.92
		1857.5	-12.00	1 / 0	23.20	11.20	13.183	33.01	-21.81
	π/2 BPSK	1860.0	-12.00	1 / 50	25.07	13.07	20.277	33.01	-19.94
		1882.5	-12.00	1 / 98	25.17	13.17	20.749	33.01	-19.84
		1905.0	-12.00	1 / 50	25.14	13.14	20.606	33.01	-19.87
20 MHz	QPSK	1860.0	-12.00	1 / 98	25.19	13.19	20.845	33.01	-19.82
		1882.5	-12.00	1 / 50	25.10	13.10	20.417	33.01	-19.91
		1905.0	-12.00	1 / 50	25.20	13.20	20.893	33.01	-19.81
	16-QAM	1882.5	-12.00	1 / 98	24.17	12.17	16.482	33.01	-20.84
		1860.0	-12.00	1 / 0	23.22	11.22	13.243	33.01	-21.79

Table 7-4. Antenna FCM EIRP Data (NR Band n25)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 118 of 131	

NR Band n2

Bandwidth	Modulation	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
5 MHz	$\pi/2$ BPSK	1852.5	-12.00	1 / 12	25.08	13.08	20.324	33.01	-19.93
		1880.0	-12.00	1 / 12	25.19	13.19	20.845	33.01	-19.82
		1907.5	-12.00	1 / 12	24.96	12.96	19.770	33.01	-20.05
	QPSK	1852.5	-12.00	1 / 23	25.17	13.17	20.749	33.01	-19.84
		1880.0	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1907.5	-12.00	1 / 23	25.09	13.09	20.370	33.01	-19.92
	16-QAM	1852.5	-12.00	1 / 12	24.17	12.17	16.482	33.01	-20.84
		1907.5	-12.00	1 / 23	23.27	11.27	13.397	33.01	-21.74
10 MHz	$\pi/2$ BPSK	1855.0	-12.00	1 / 0	25.19	13.19	20.845	33.01	-19.82
		1880.0	-12.00	1 / 25	24.90	12.90	19.498	33.01	-20.11
		1905.0	-12.00	1 / 48	25.11	13.11	20.464	33.01	-19.90
	QPSK	1855.0	-12.00	1 / 0	25.20	13.20	20.893	33.01	-19.81
		1880.0	-12.00	1 / 0	25.15	13.15	20.654	33.01	-19.86
		1905.0	-12.00	1 / 25	25.11	13.11	20.464	33.01	-19.90
	16-QAM	1905.0	-12.00	1 / 48	24.05	12.05	16.032	33.01	-20.96
		1855.0	-12.00	1 / 48	23.17	11.17	13.092	33.01	-21.84
15 MHz	$\pi/2$ BPSK	1857.5	-12.00	1 / 73	25.09	13.09	20.370	33.01	-19.92
		1880.0	-12.00	1 / 37	25.20	13.20	20.893	33.01	-19.81
		1902.5	-12.00	1 / 0	25.18	13.18	20.797	33.01	-19.83
	QPSK	1857.5	-12.00	1 / 73	25.05	13.05	20.184	33.01	-19.96
		1880.0	-12.00	1 / 73	25.12	13.12	20.512	33.01	-19.89
		1902.5	-12.00	1 / 0	25.10	13.10	20.417	33.01	-19.91
	16-QAM	1880.0	-12.00	1 / 37	24.19	12.19	16.558	33.01	-20.82
		1857.5	-12.00	1 / 37	23.07	11.07	12.794	33.01	-21.94
20 MHz	$\pi/2$ BPSK	1860.0	-12.00	1 / 0	25.12	13.12	20.512	33.01	-19.89
		1880.0	-12.00	1 / 98	25.20	13.20	20.893	33.01	-19.81
		1900.0	-12.00	1 / 0	25.08	13.08	20.324	33.01	-19.93
	QPSK	1860.0	-12.00	1 / 98	25.15	13.15	20.654	33.01	-19.86
		1880.0	-12.00	1 / 50	25.18	13.18	20.797	33.01	-19.83
		1900.0	-12.00	1 / 98	25.18	13.18	20.797	33.01	-19.83
	16-QAM	1880.0	-12.00	1 / 0	24.20	12.20	16.596	33.01	-20.81
		1900.0	-12.00	1 / 0	23.25	11.25	13.335	33.01	-21.76

Table 7-5. Antenna FCM EIRP Data (NR Band n2)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch				

7.7 Radiated Spurious Emissions

§2.1053, 24.238(a)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 120 of 131

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

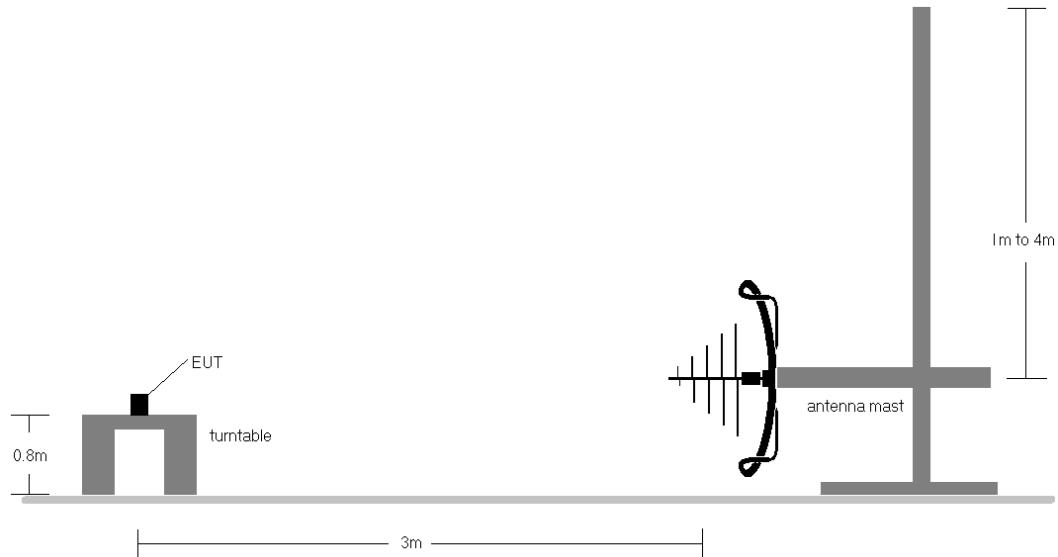


Figure 7-11. Test Instrument & Measurement Setup < 1GHz

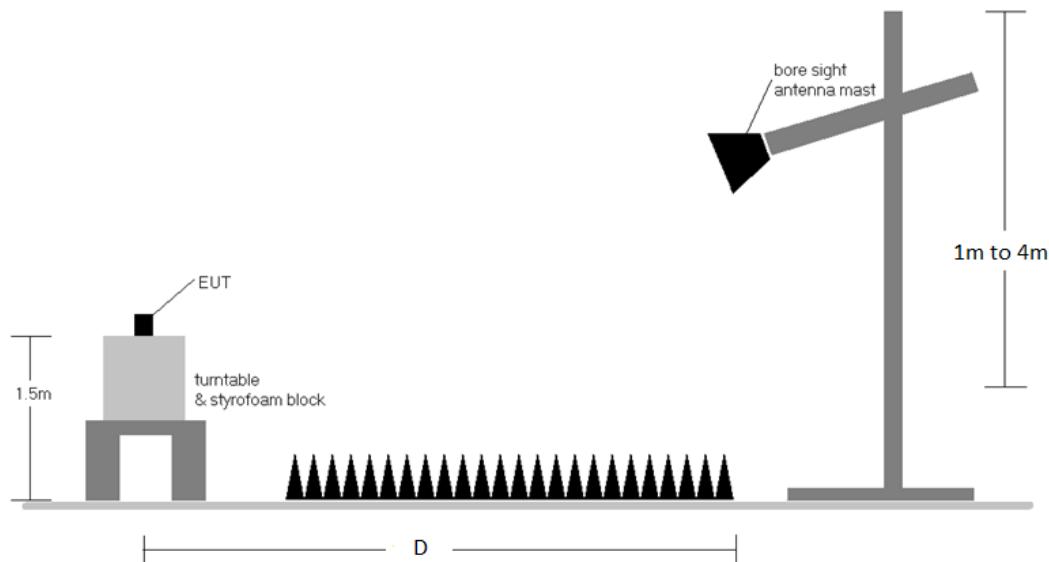


Figure 7-12. Test Instrument & Measurement Setup > 1 GHz

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 121 of 131


Test Notes

1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 D01 v03r01 Section 5.8.4.
 - a. $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b. $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
5. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
7. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
8. NR band n25 overlaps the entire frequency range of NR band 2. Therefore, the radiated emissions data of NR band n25 provided in this report covers NR band n2.

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 122 of 131

7.7.1 Antenna FCM – Radiated Spurious Emission Measurement

LTE Band 25/2

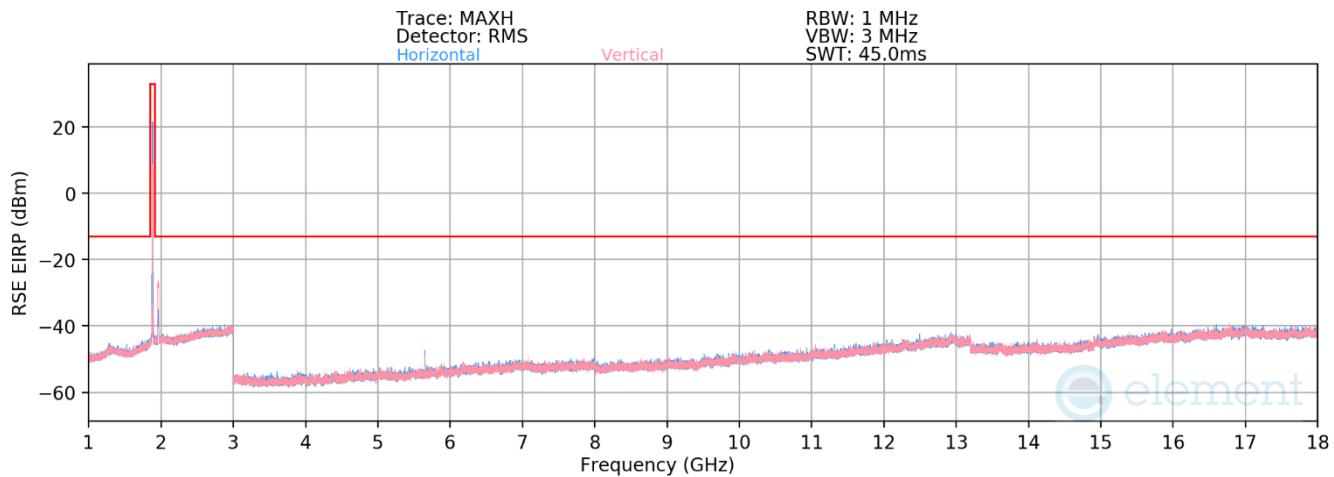

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 123 of 131

Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	-	-	-	-79.58	5.69	33.11	-62.15	-13.00	-49.15
5580.0	V	342	185	-65.24	9.51	51.27	-43.99	-13.00	-30.99
7440.0	-	-	-	-82.28	11.33	36.05	-59.21	-13.00	-46.21
9300.0	-	-	-	-81.67	12.46	37.79	-57.47	-13.00	-44.47
11160.0	-	-	-	-82.37	15.48	40.11	-55.15	-13.00	-42.15

Table 7-6. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.0	-	-	-	-80.03	5.59	32.56	-62.70	-13.00	-49.70
5647.5	V	254	136	-72.29	9.43	44.15	-51.11	-13.00	-38.11
7530.0	-	-	-	-81.88	11.29	36.41	-58.85	-13.00	-45.85
9412.5	-	-	-	-81.54	12.16	37.62	-57.64	-13.00	-44.64
11295.0	-	-	-	-82.71	16.08	40.37	-54.89	-13.00	-41.89

Table 7-7. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1905.0
RB / Offset:	1 / 50

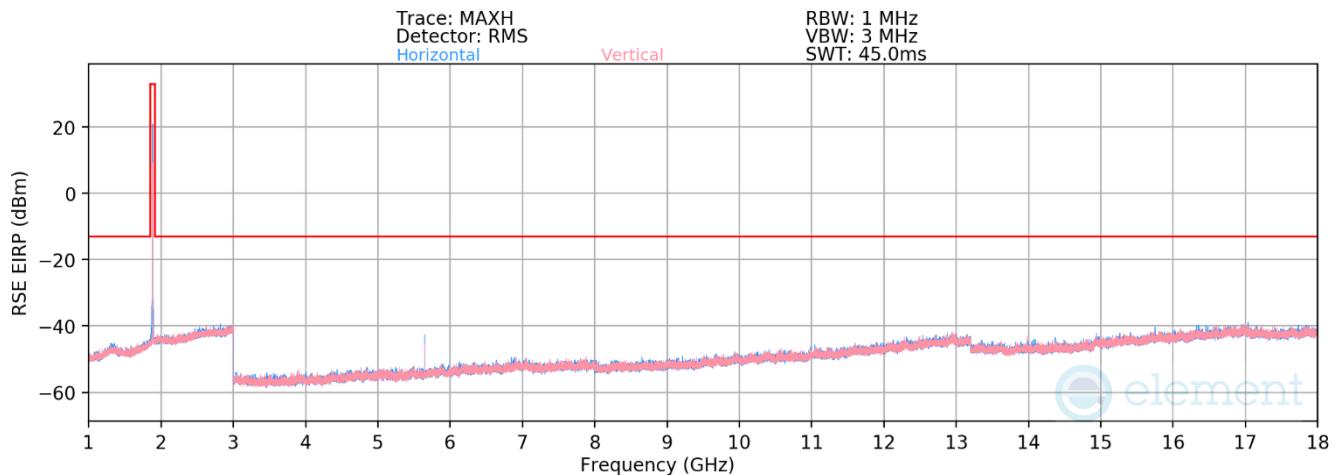
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	-	-	-	-79.76	5.53	32.78	-62.48	-13.00	-49.48
5715.00	-	-	-	-79.61	11.51	38.91	-56.35	-13.00	-43.35
7620.00	V	353	168	-80.44	9.93	36.49	-58.77	-13.00	-45.77
9525.00	-	-	-	-81.77	13.33	38.56	-56.70	-13.00	-43.70
11430.00	-	-	-	-82.72	16.23	40.52	-54.74	-13.00	-41.74

Table 7-8. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – High Channel)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch				

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

NR Band n25/n2

Plot 7-184. Radiated Spurious Plot (NR Band n25/n2)

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 125 of 131

Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	-	-	-	-79.72	5.79	33.07	-62.18	-13.00	-49.18
5580.0	H	100	218	-75.71	9.51	40.79	-54.46	-13.00	-41.46
7440.0	-	-	-	-81.80	11.15	36.35	-58.91	-13.00	-45.91
9300.0	-	-	-	-81.54	12.46	37.92	-57.34	-13.00	-44.34
11160.0	-	-	-	-82.58	15.59	40.01	-55.25	-13.00	-42.25

Table 7-9. Antenna FCM Radiated Spurious Data (NR Band n25/n2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.0	-	-	-	-79.79	5.69	32.90	-62.36	-13.00	-49.36
5647.5	H	101	244	-74.14	9.43	42.29	-52.96	-13.00	-39.96
7530.0	-	-	-	-81.82	11.26	36.44	-58.82	-13.00	-45.82
9412.5	-	-	-	-81.66	12.15	37.48	-57.77	-13.00	-44.77
11295.0	-	-	-	-82.74	15.94	40.21	-55.05	-13.00	-42.05

Table 7-10. Antenna FCM Radiated Spurious Data (NR Band n25/n2 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1905.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.0	-	-	-	-79.48	5.53	33.05	-62.20	-13.00	-49.20
5715.0	V	378	178	-76.17	9.93	40.77	-54.49	-13.00	-41.49
7620.0	-	-	-	-81.74	11.29	36.55	-58.71	-13.00	-45.71
9525.0	-	-	-	-81.87	13.33	38.46	-56.80	-13.00	-43.80
11430.0	-	-	-	-82.69	16.26	40.57	-54.69	-13.00	-41.69

Table 7-11. Antenna FCM Radiated Spurious Data (NR Band n25/n2 – High Channel)

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch				

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8 Frequency Stability / Temperature Variation

§2.1055, §24.235

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 127 of 131

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber. For LTE testing, in addition, the EUT was connected to a communication tester via an attenuated RF coupler.

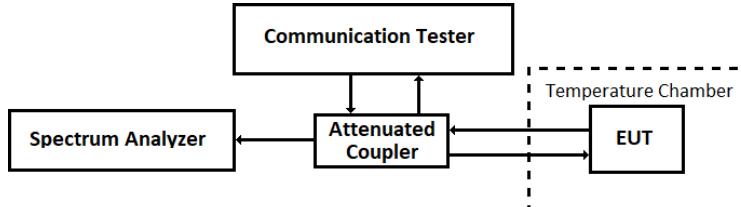


Figure 7-13. LTE Test Instrument & Measurement Setup

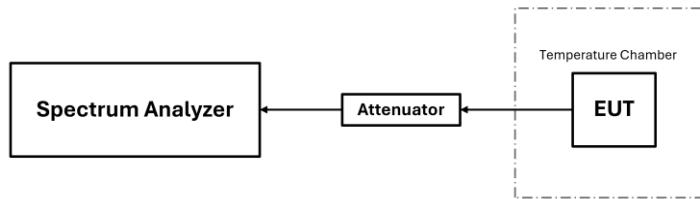


Figure 7-14. FR1 Test Instrument & Measurement Setup

Test Notes

N/A

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 128 of 131

Frequency Stability / Temperature Variation

LTE B25/2				
		Operating Band Lower Boundary (GHz)	1.850	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.85047932	-0.00047932
		- 20	1.85048257	-0.00048257
		- 10	1.85021103	-0.00021103
		0	1.85049415	-0.00049415
		+ 10	1.85039711	-0.00039711
		+ 20 (Ref)	1.85050691	-0.00050691
		+ 30	1.85049187	-0.00049187
		+ 40	1.85021420	-0.00021420
		+ 50	1.85048563	-0.00048563
		Battery Endpoint	1.85010381	-0.00010381

Table 7-12. LTE Band 25/2 Lower Boundary Frequency Stability Data

LTE B25/2				
		Operating Band Upper Boundary (GHz)	1.915	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.91442351	-0.00057649
		- 20	1.91433412	-0.00066588
		- 10	1.91449876	-0.00050124
		0	1.91465589	-0.00034411
		+ 10	1.91447891	-0.00052109
		+ 20 (Ref)	1.91411037	-0.00088963
		+ 30	1.91451264	-0.00048736
		+ 40	1.91445923	-0.00054077
		+ 50	1.91424175	-0.00075825
		Battery Endpoint	1.91451002	-0.00048998

Table 7-13. LTE Band 25/2 Upper Boundary Frequency Stability Data

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 129 of 131

NR Band n25/2

NR Band n25/n2				
		Operating Band Lower Boundary (GHz)	1.850	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.85027621	-0.00027621
		- 20	1.85039768	-0.00039768
		- 10	1.85050573	-0.00050573
		0	1.85048459	-0.00048459
		+ 10	1.85012684	-0.00012684
		+ 20 (Ref)	1.85050340	-0.00050340
		+ 30	1.85049617	-0.00049617
		+ 40	1.85031632	-0.00031632
		+ 50	1.85048791	-0.00048791
		Battery Endpoint	1.85029120	-0.00029120

Table 7-14. NR Band n25/n2 Lower Boundary Frequency Stability Data

NR Band n25/n2				
		Operating Band Upper Boundary (GHz)	1.915	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	1.91445268	-0.00054732
		- 20	1.91433127	-0.00066873
		- 10	1.91453218	-0.00046782
		0	1.91444793	-0.00055207
		+ 10	1.91421789	-0.00078211
		+ 20 (Ref)	1.91450752	-0.00049248
		+ 30	1.91427013	-0.00072987
		+ 40	1.91446401	-0.00053599
		+ 50	1.91455583	-0.00044417
		Battery Endpoint	1.91412350	-0.00087650

Table 7-15. NR Band n25/n2 Upper Boundary Frequency Stability Data

FCC ID: BCG-A3326	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch		Page 130 of 131

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple Watch FCC ID: BCG-A3326 complies with all the requirements of Part 24 of the FCC rules.

FCC ID: BCG-A3326	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270036-02.BCG	Test Dates: 03/29/2025 – 07/17/2025	EUT Type: Watch	Page 131 of 131