



**Plot 7-62. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 12 - High Channel)**

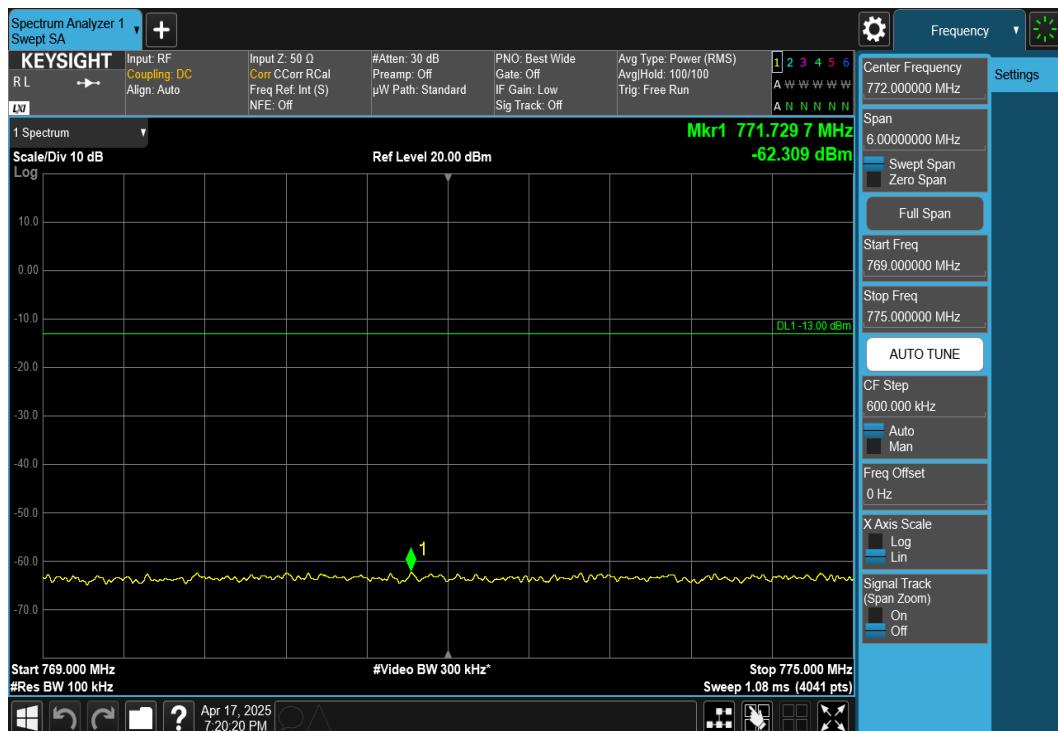

**Plot 7-63. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 12 - High Channel)**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 50 of 96

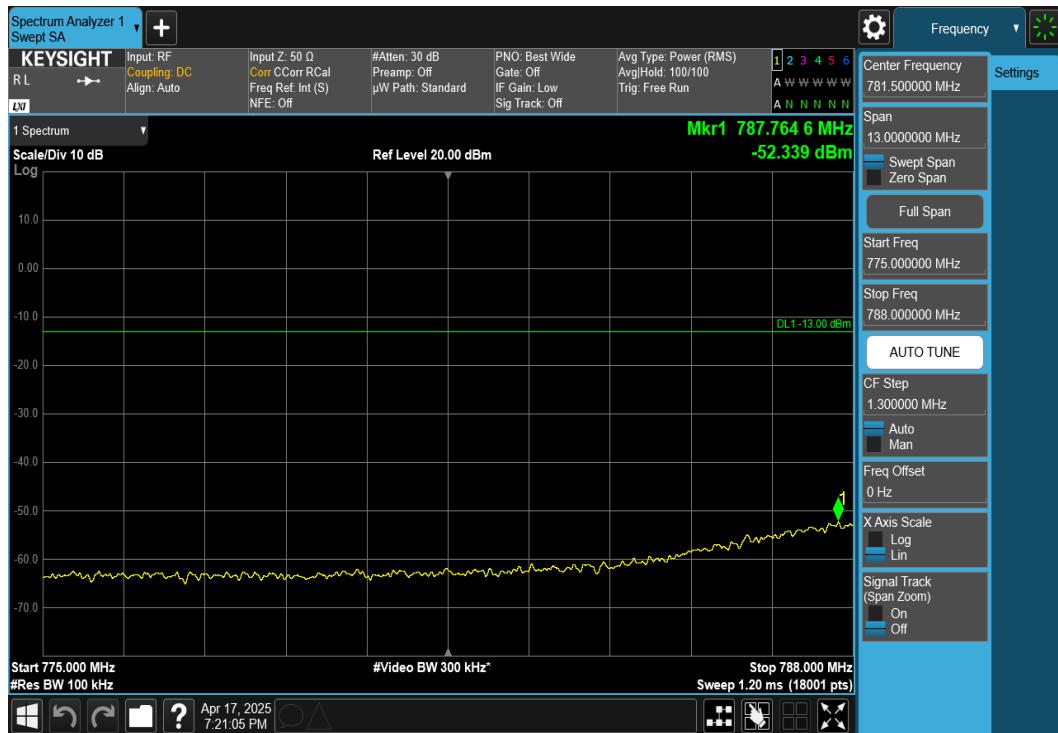

**Plot 7-64. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 12 - High Channel)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT	
<b>Test Report S/N:</b> 1C2503270032-05.BCG	<b>Test Dates:</b> 1/17/2025 - 7/25/2025	<b>EUT Type:</b> Watch	<b>Approved by:</b> Technical Manager  Page 51 of 96

## 7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.691(a) §90.543(e)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is  $43 + 10\log_{10}(P[\text{Watts}])$ , where  $P$  is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is  $50 + 10\log_{10}(P[\text{Watts}])$ , where  $P$  is the transmitter power in Watts.**

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

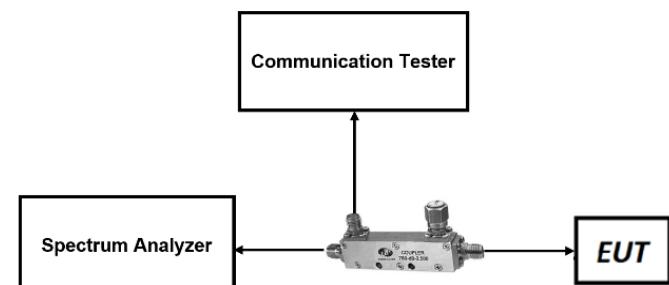


Figure 7-5. LTE Test Instrument & Measurement Setup




Figure 7-6. FR1 Instrument & Measurement Setup


FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 52 of 96

## Test Notes


1. For channel edge emission, the signal analyzer's "ACP" measurement capability is used.
2. Per Part 90, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center.
3. For LTE Band 14 operation under Part 90.543, the power of any emission must be reduced below the mean output power (P) by at least  $43 + 10\log(P)$  dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.
4. Additionally, for LTE Band 14 operation, on all frequencies between 769-775 MHz and 799-805 MHz, the power of any emission shall be attenuated by a factor not less than  $65 + 10 \log(P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 53 of 96

## LTE Band 26

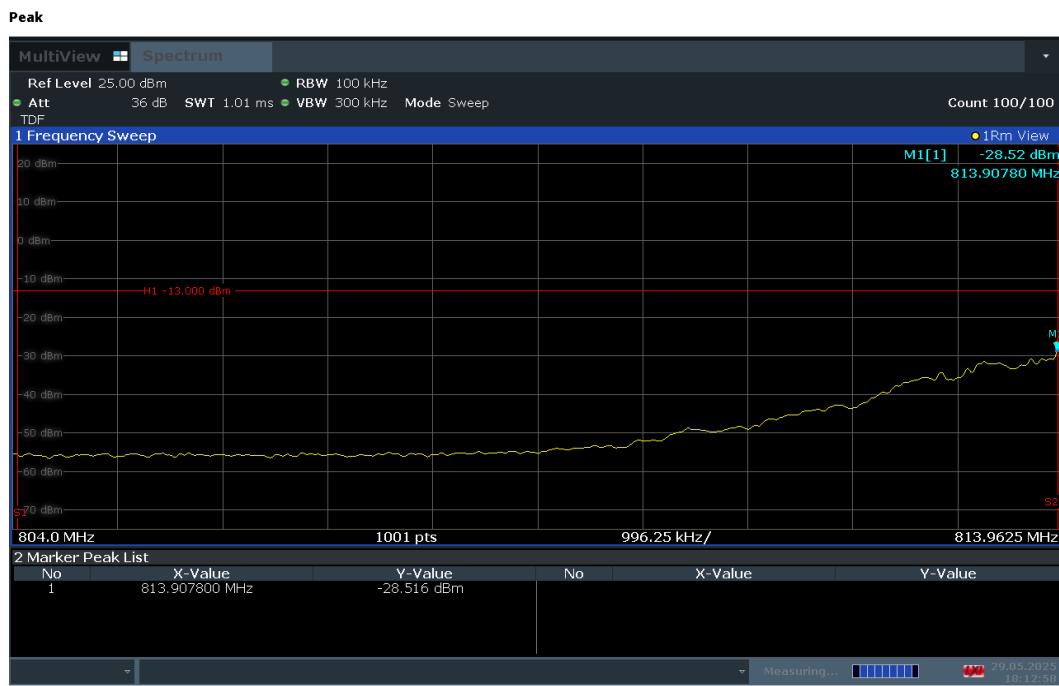


**Plot 7-65. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Lower Channel)**

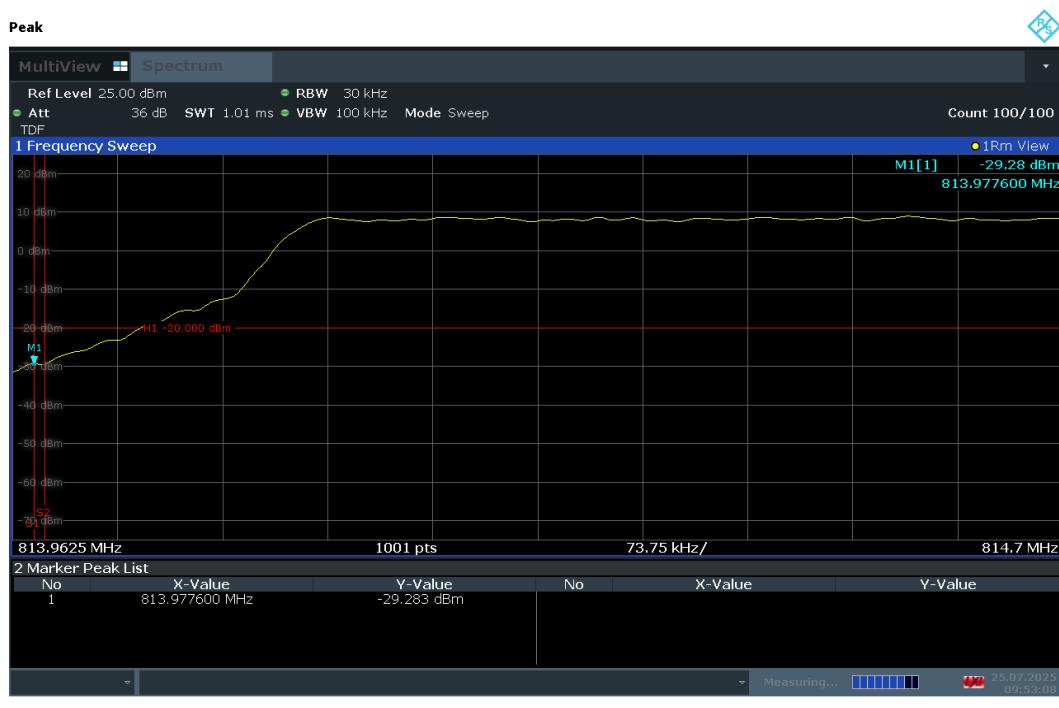


**Plot 7-66. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Lower Channel)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 54 of 96

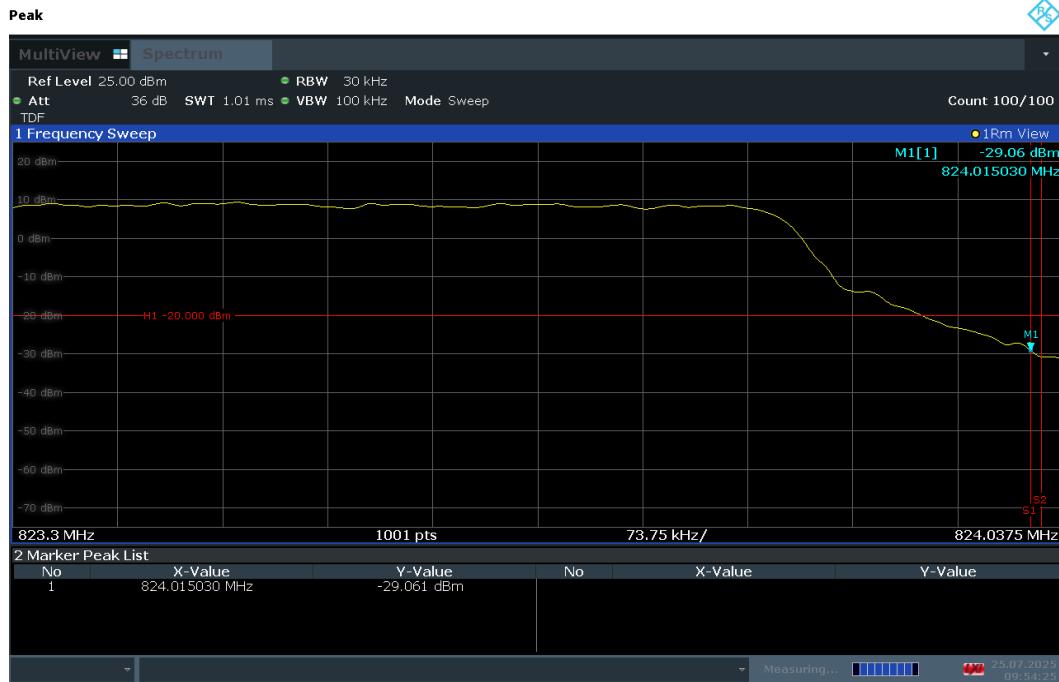

09:54:26 25.07.2025


**Plot 7-67. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Upper Channel)**

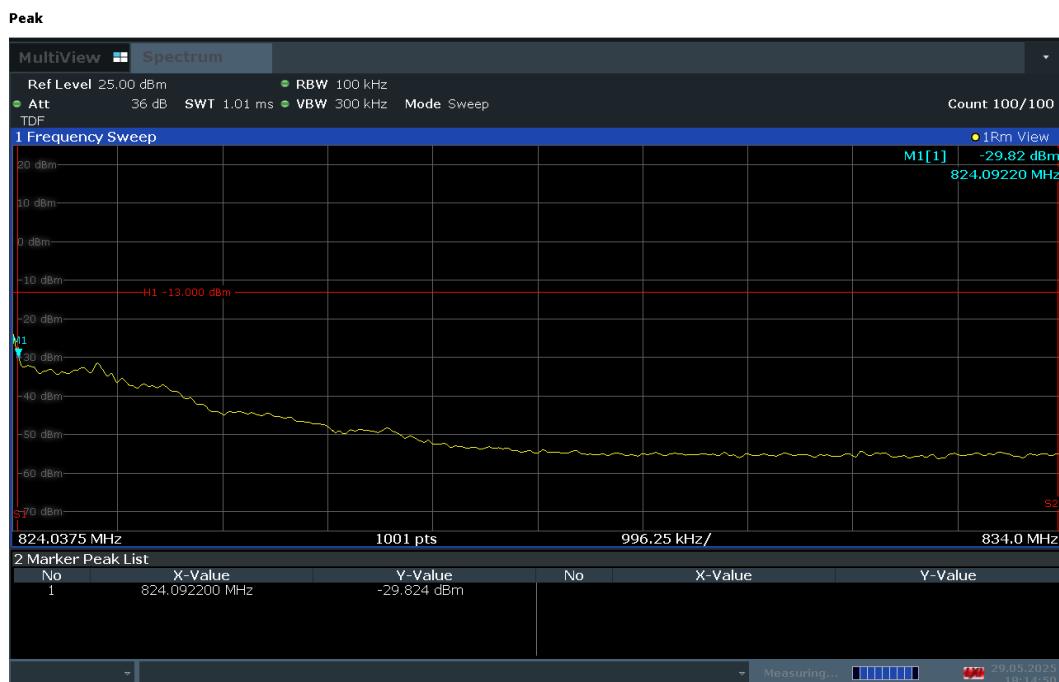


18:14:51 29.05.2025

**Plot 7-68. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Upper Channel)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 55 of 96

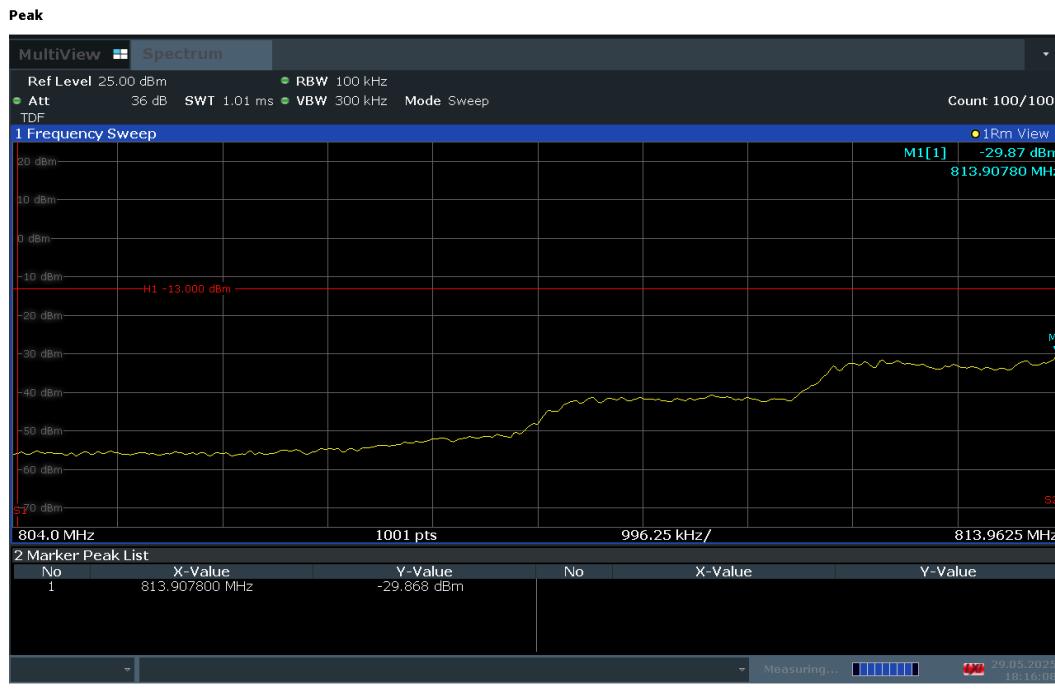


**Plot 7-69. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - Lower Channel)**

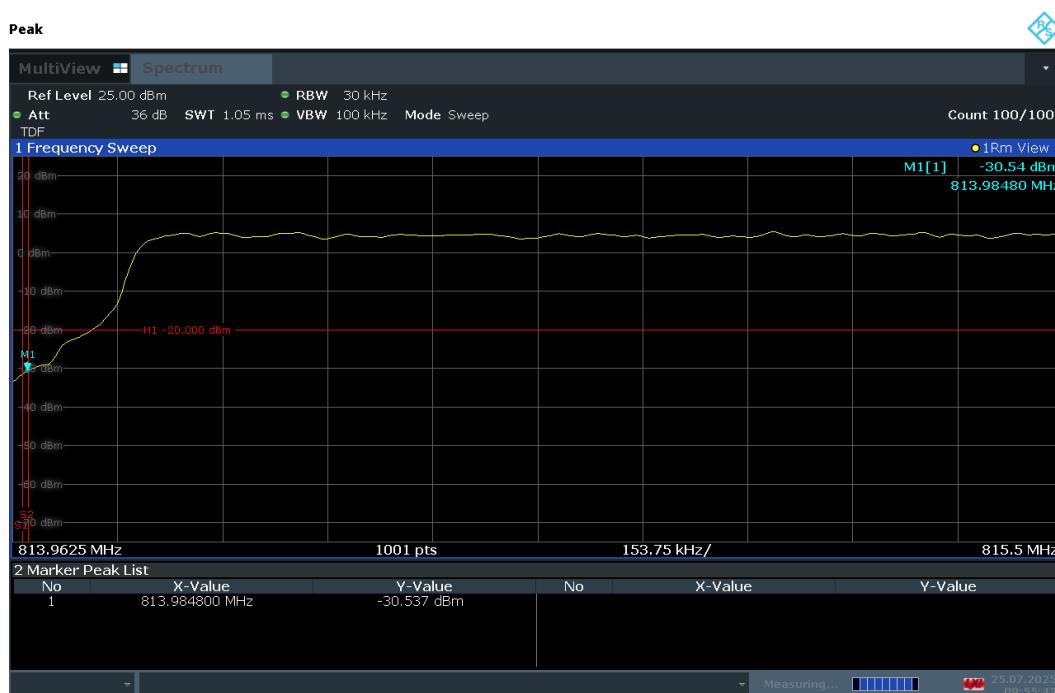


**Plot 7-70. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - Lower Channel)**

FCC ID: BCG-A3335	 element		PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 56 of 96	

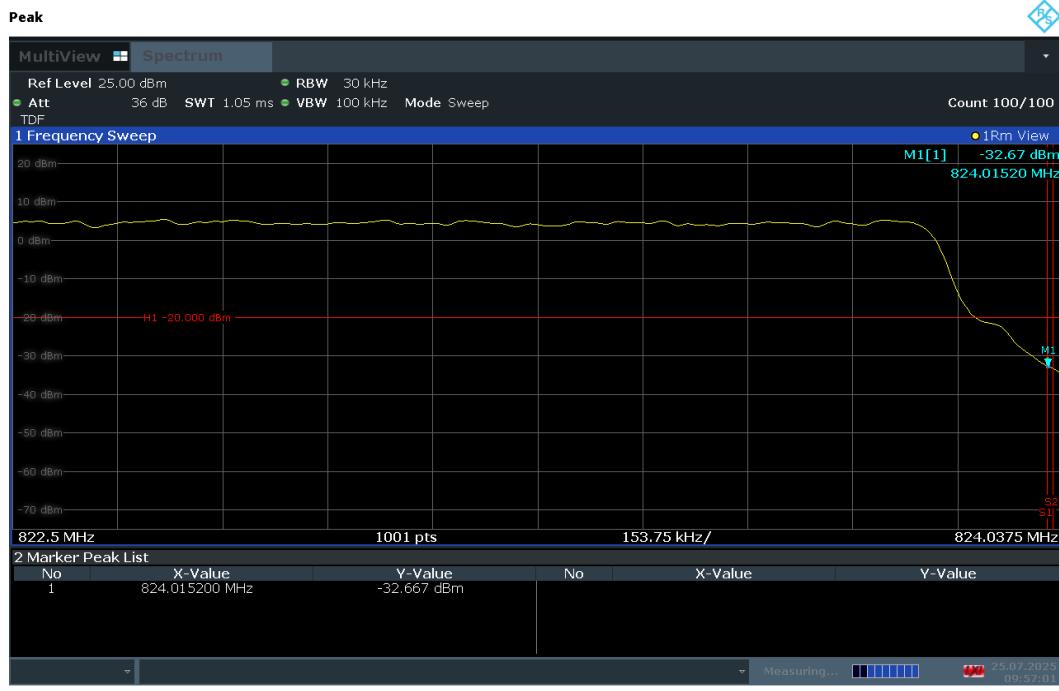

09:57:02 25.07.2025


**Plot 7-71. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - Upper Channel)**

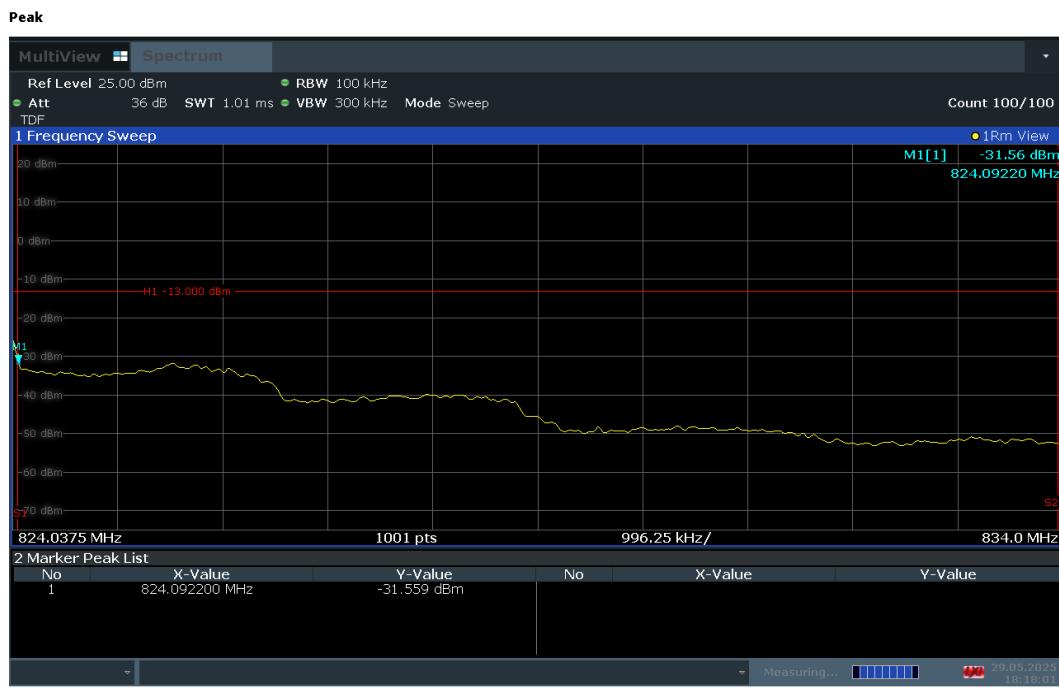

18:18:01 29.05.2025


**Plot 7-72. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - Upper Channel)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 57 of 96

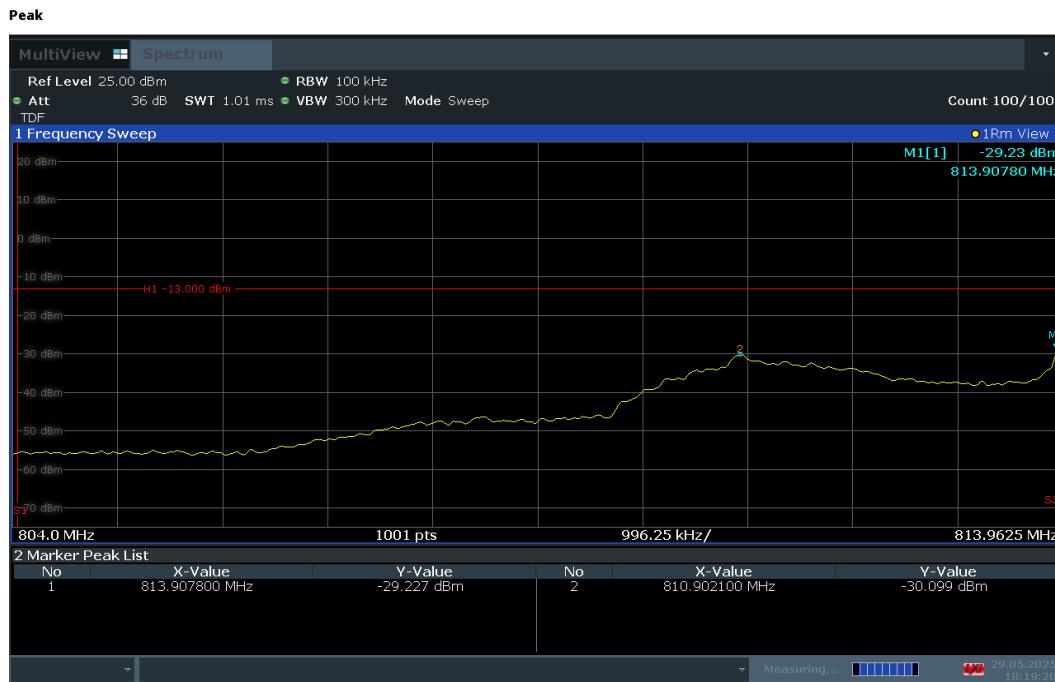

18:19:20 29.05.2025


**Plot 7-73. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - Lower Channel)**

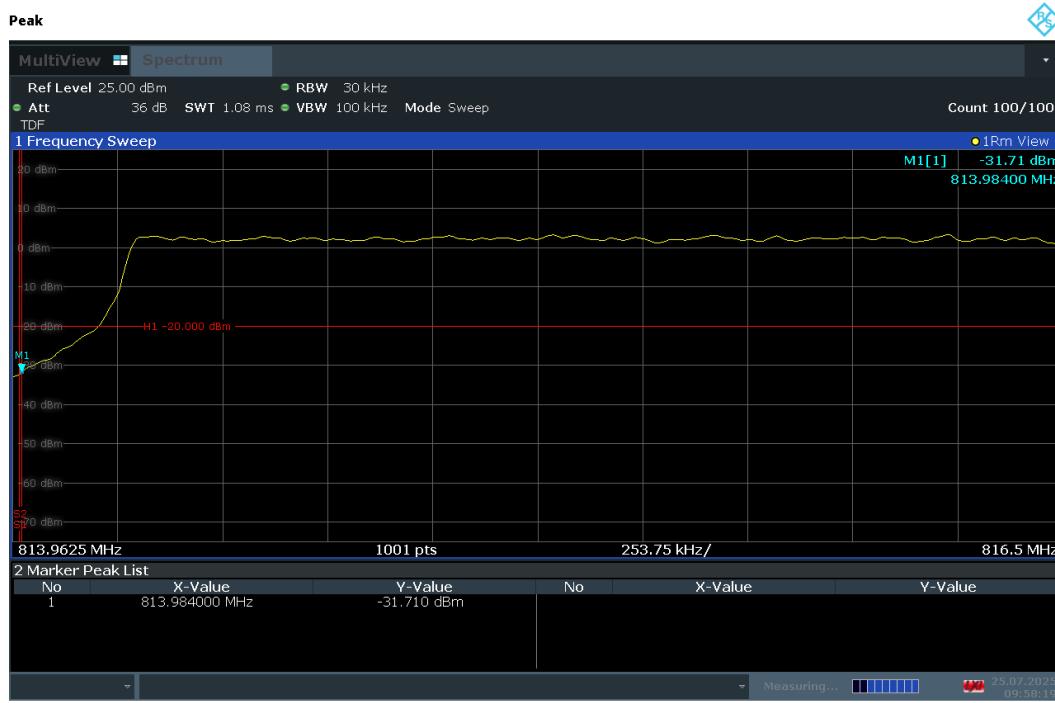

09:58:20 25.07.2025


**Plot 7-74. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - Lower Channel)**

FCC ID: BCG-A3335	<b>element</b>	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 58 of 96	

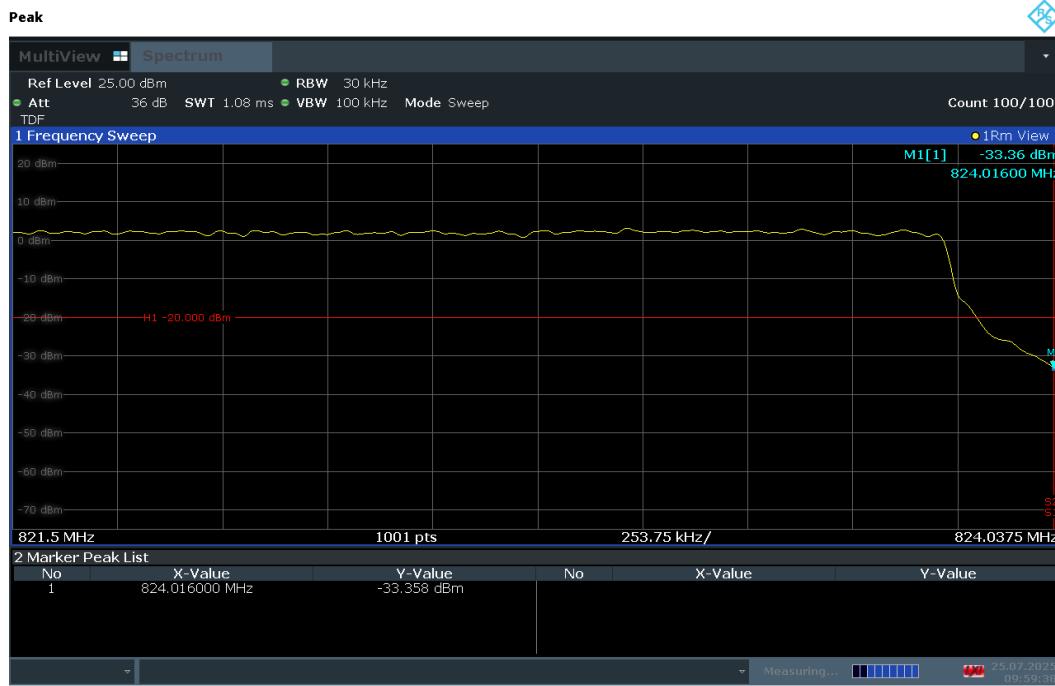

09:59:39 25.07.2025


**Plot 7-75. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - Upper Channel)**

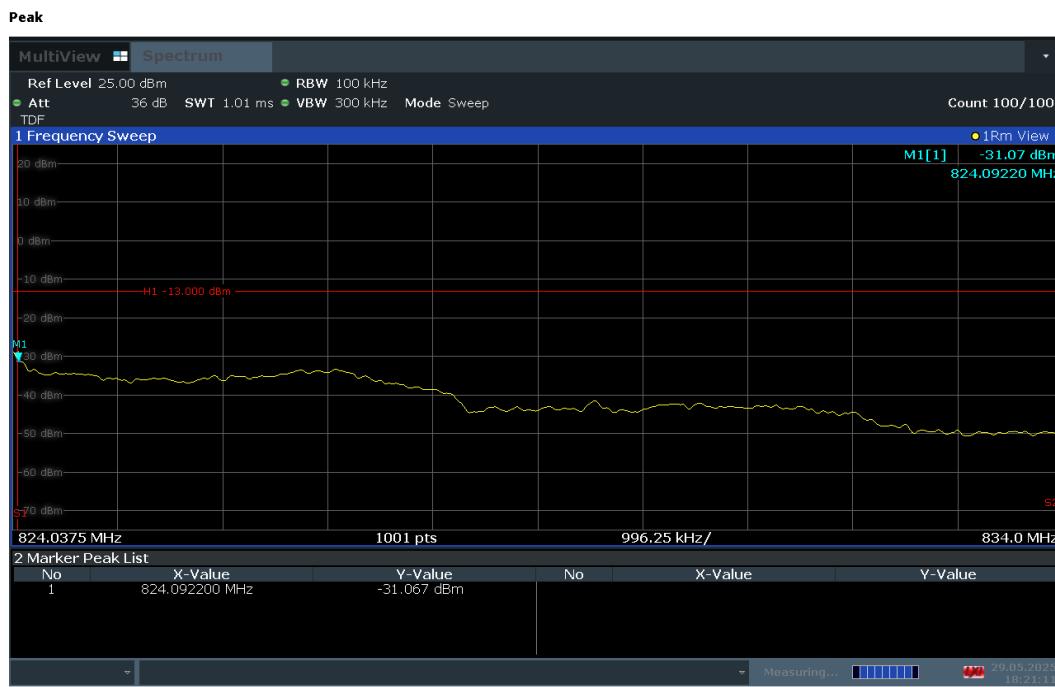

18:21:12 29.05.2025


**Plot 7-76. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - Upper Channel)**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 59 of 96

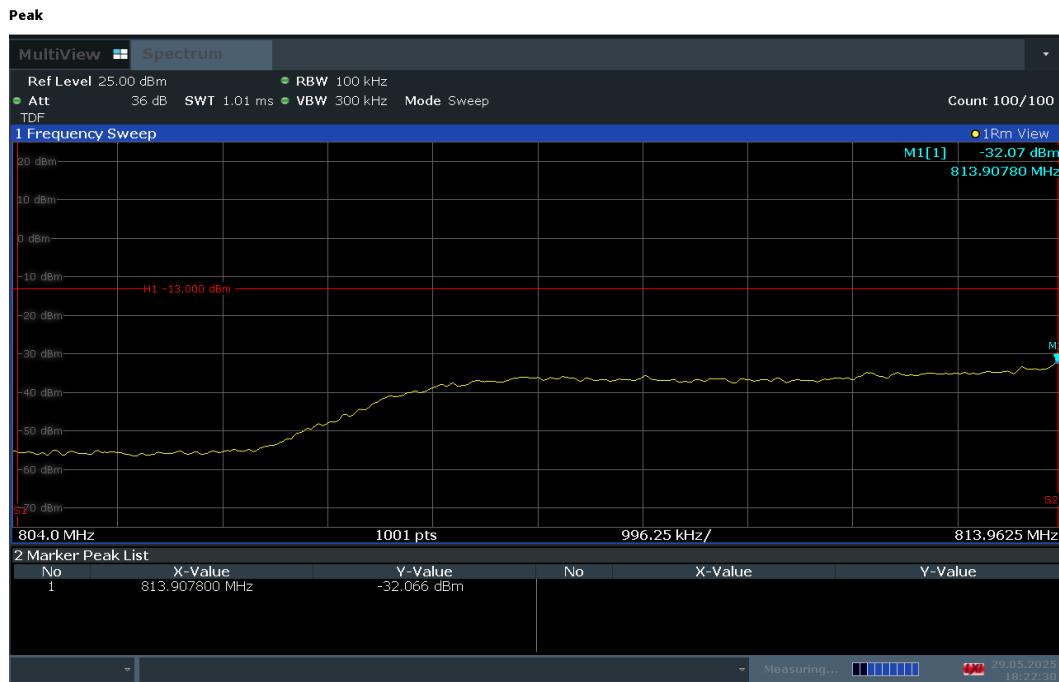

18:22:31 29.05.2025

**Plot 7-77. Channel Edge Plot (LTE Band 26 - 10MHz QPSK - Lower Channel)**

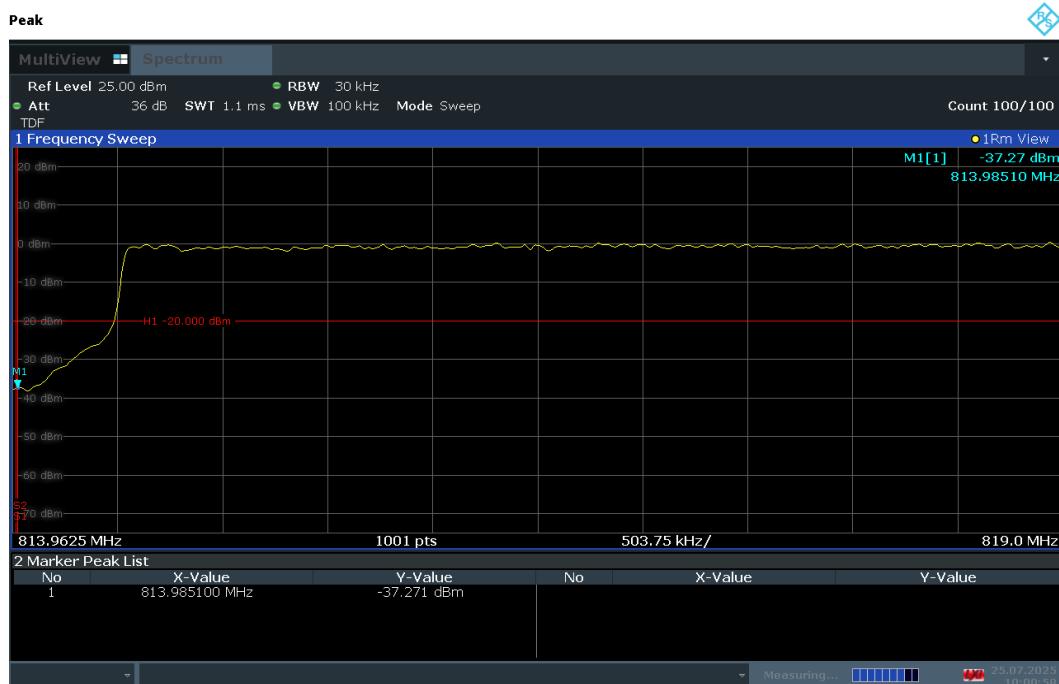


10:00:58 25.07.2025

**Plot 7-78. Channel Edge Plot (LTE Band 26 - 10MHz QPSK - Lower Channel)**

FCC ID: BCG-A3335	 <b>element</b> <b>PART 90 MEASUREMENT REPORT</b>			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 60 of 96


V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

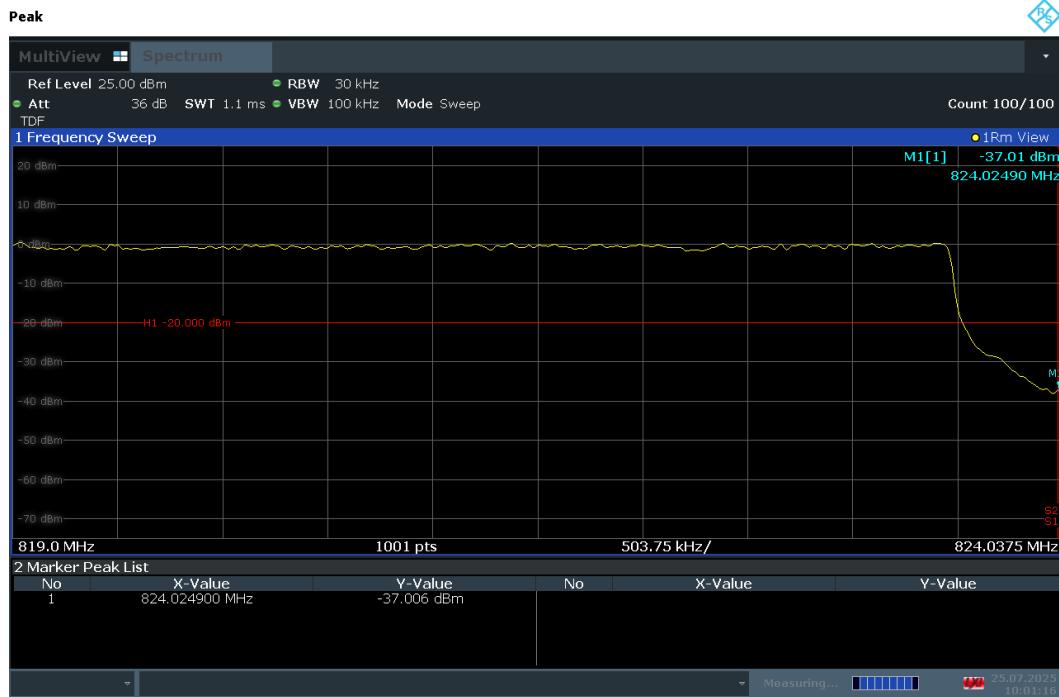

10:01:16 25.07.2025

**Plot 7-79. Channel Edge Plot (LTE Band 26 - 10MHz QPSK - Upper Channel)**

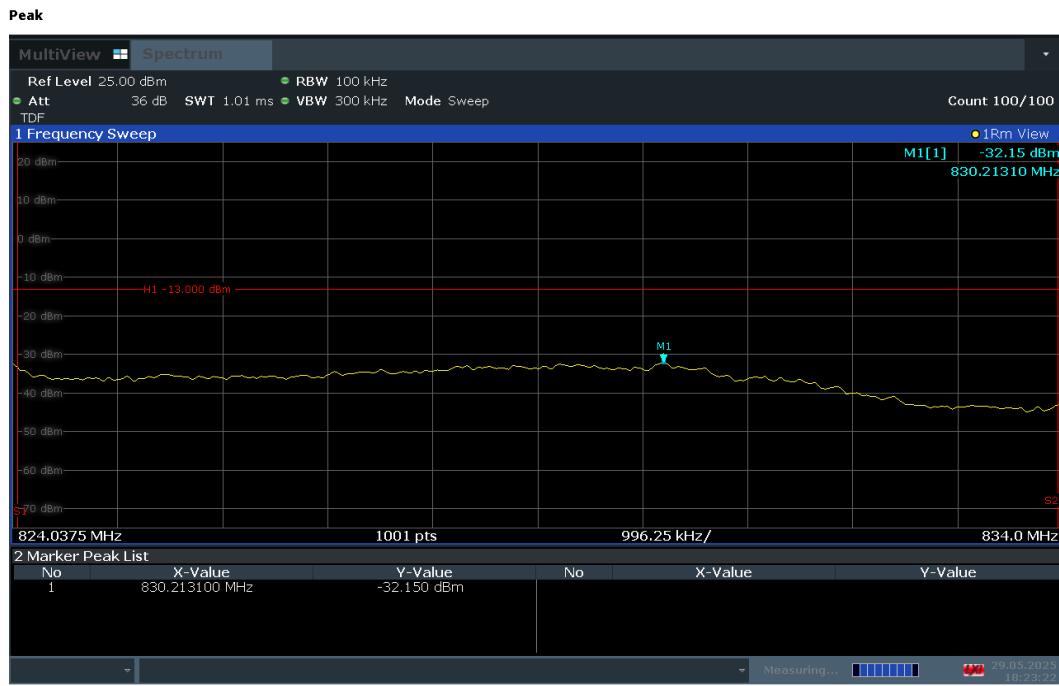

18:23:23 29.05.2025

**Plot 7-80. Channel Edge Plot (LTE Band 26 - 10MHz QPSK - Upper Channel)**

FCC ID: BCG-A3335	 <b>element</b> <b>PART 90 MEASUREMENT REPORT</b>			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 61 of 96


V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## LTE Band 14




**Plot 7-81. Lower Emission Mask Plot (LTE Band 14 – 5MHz QPSK – RB Size 25)**

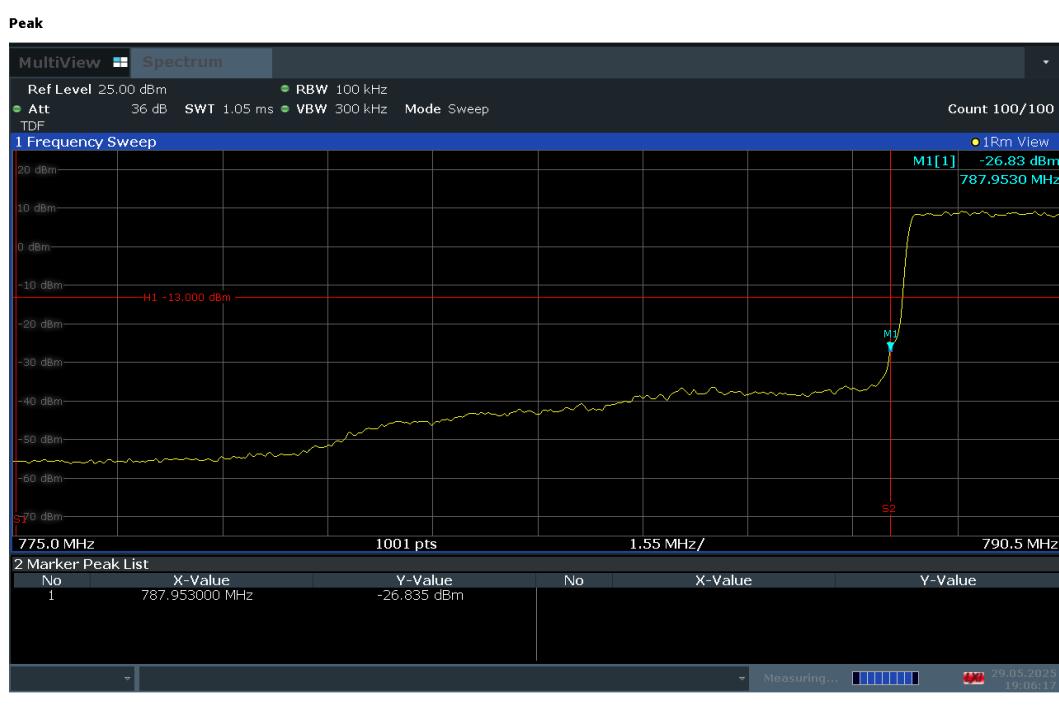


**Plot 7-82. Lower Band Edge Plot (LTE Band 14 – 5MHz QPSK – RB Size 25)**

FCC ID: BCG-A3335	 <b>element</b> PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 62 of 96

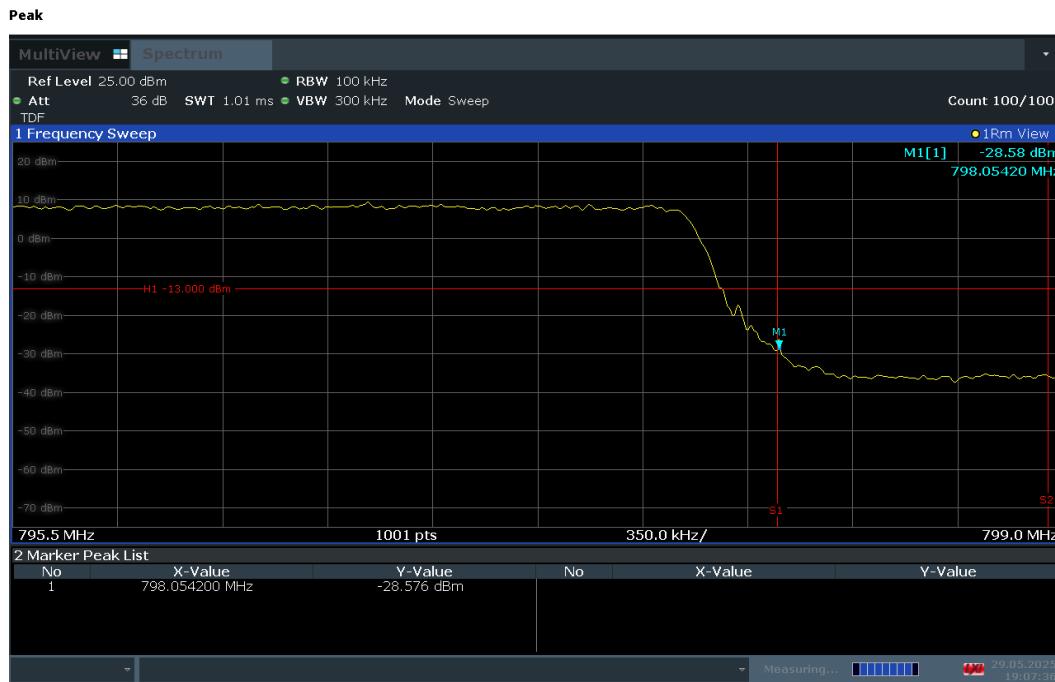

**Plot 7-83. Upper Band Edge Plot (LTE Band 14 – 5MHz QPSK – RB Size 25)**

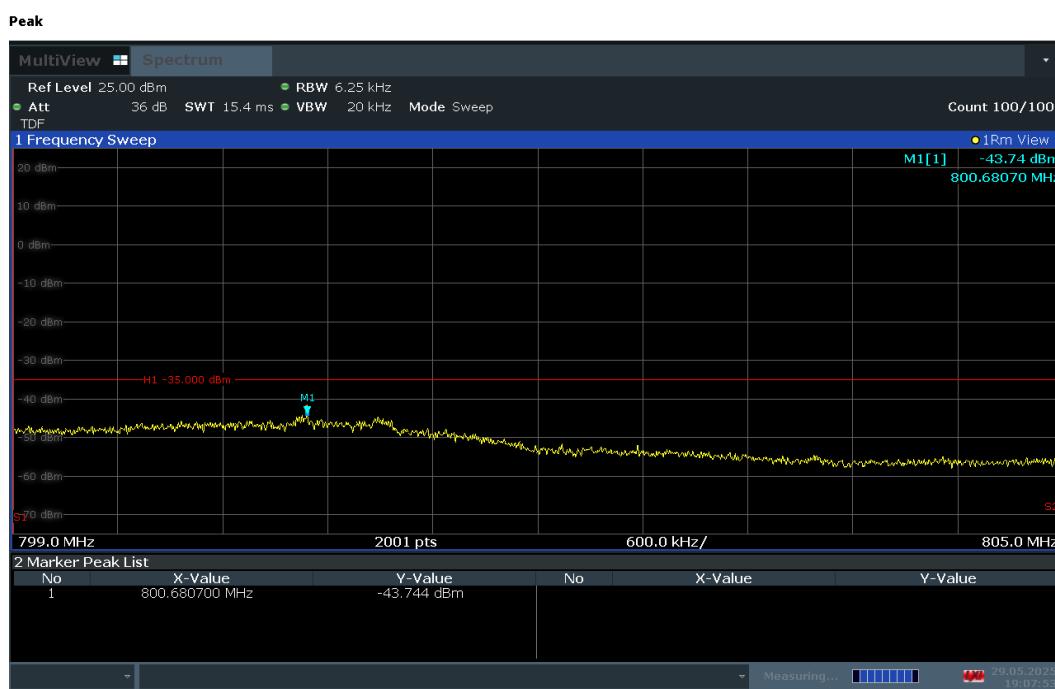


**Plot 7-84. Upper Emission Mask Plot (LTE Band 14 – 5MHz QPSK – RB Size 25)**

FCC ID: BCG-A3335	 <b>element</b> PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 63 of 96	

**Peak**


19:09:12 29.05.2025

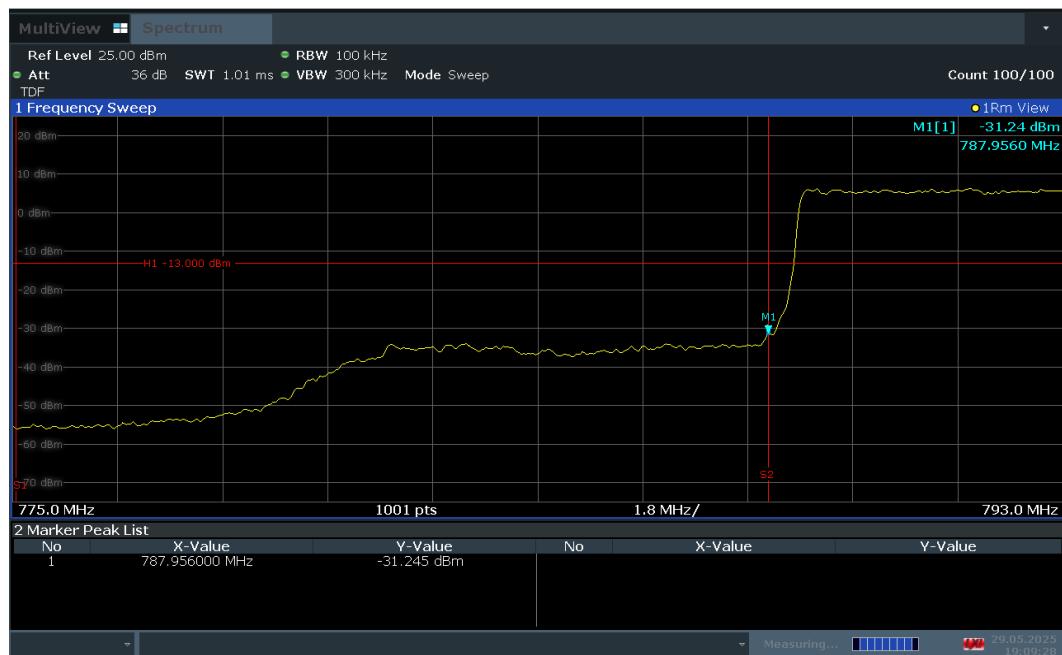**Plot 7-85. Lower Emission Mask Plot (LTE Band 14 - 10MHz QPSK – RB Size 50)**
**Peak**


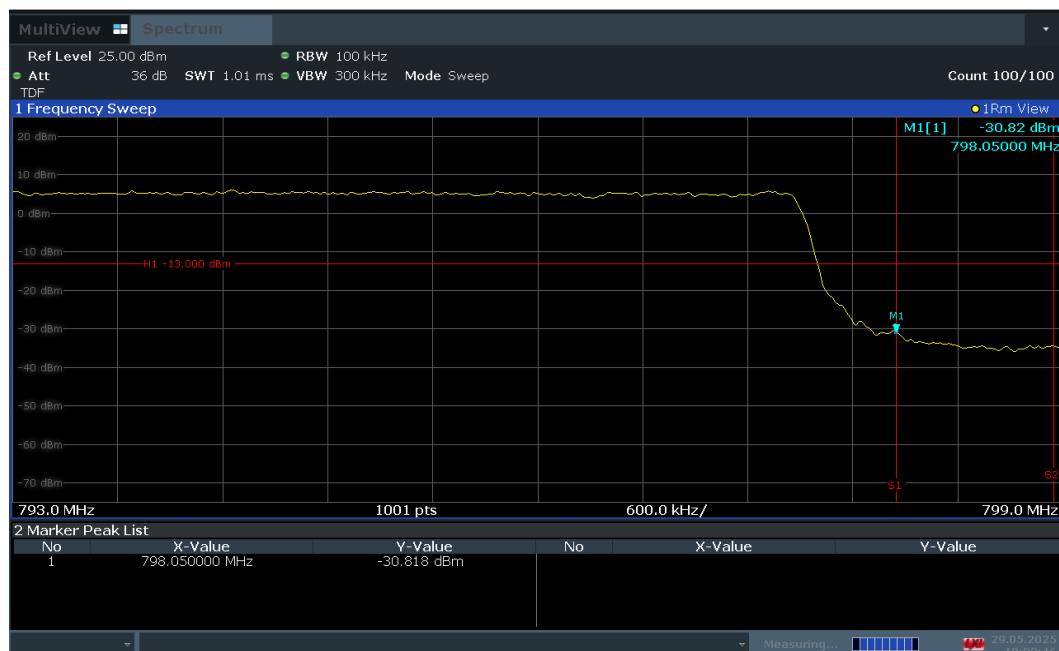
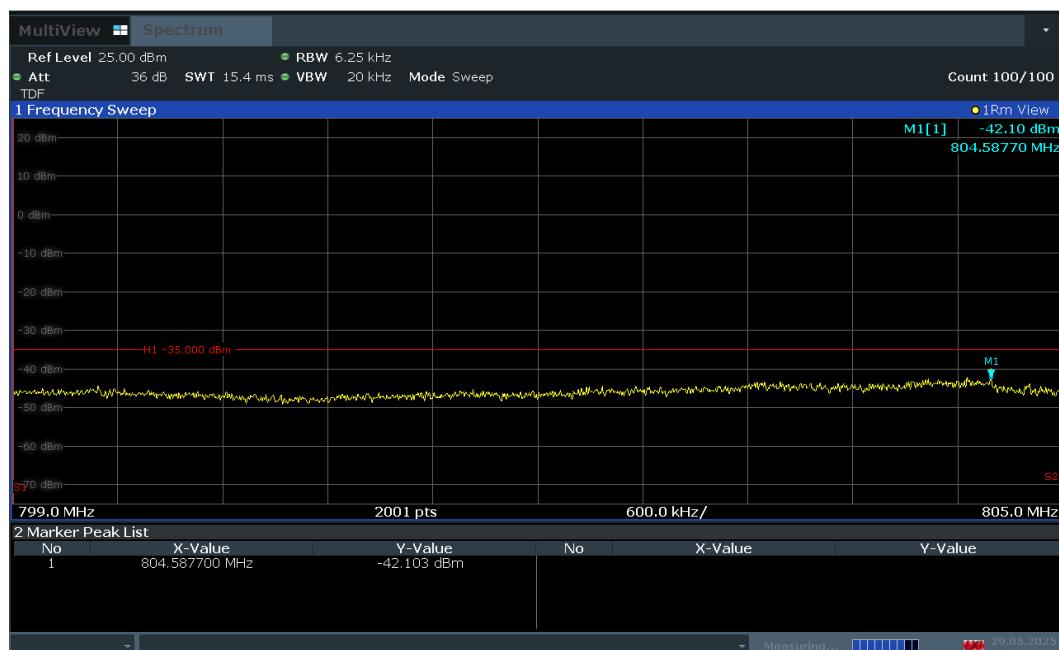
19:09:29 29.05.2025

**Plot 7-86. Lower Band Edge Plot (LTE Band 14 - 10MHz QPSK – RB Size 50)**

FCC ID: BCG-A3335	 <b>element</b> PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 64 of 96

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

**Peak**

**Plot 7-87. Upper Band Edge Plot (LTE Band 14 - 10MHz QPSK – RB Size 50)**
**Peak**

**Plot 7-88. Upper Emission Mask Plot (LTE Band 14 - 10MHz QPSK – RB Size 50)**

FCC ID: BCG-A3335	 <b>PART 90 MEASUREMENT REPORT</b>			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 65 of 96


V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## NR Band n26




Plot 7-89. Channel Edge Plot (NR Band n26, 5MHz DFT-s-OFDM π/2 BPSK – Lower Channel)

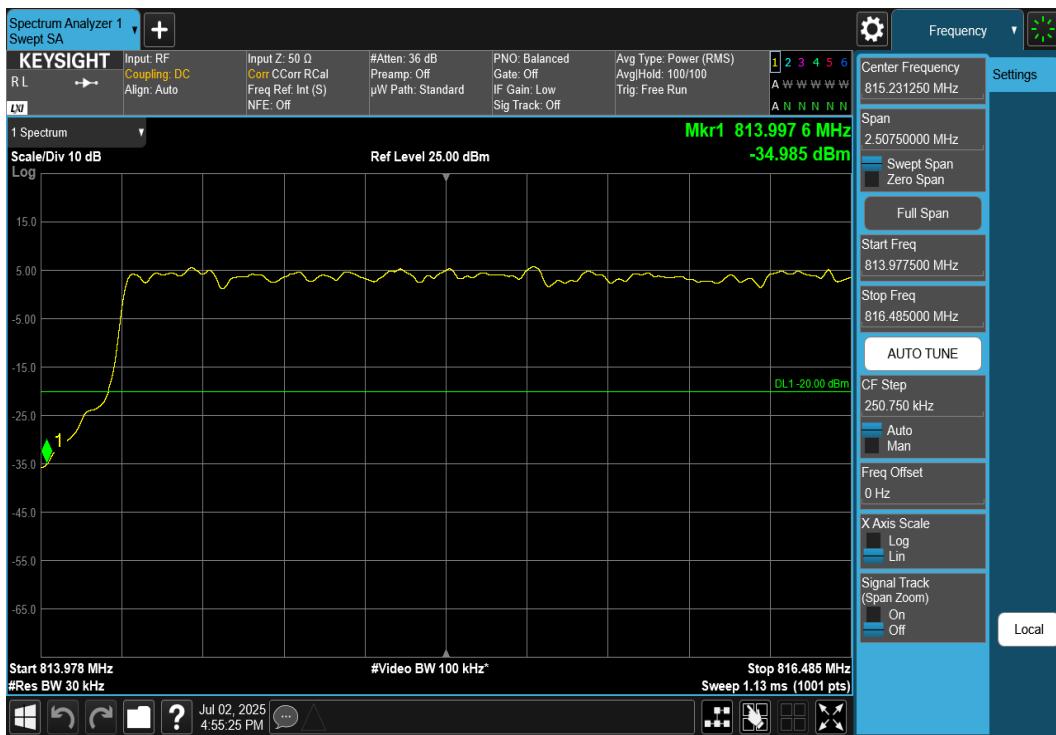

Plot 7-90. Channel Edge Plot (NR Band n26, 5MHz DFT-s-OFDM π/2 BPSK – Lower Channel)


FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 66 of 96

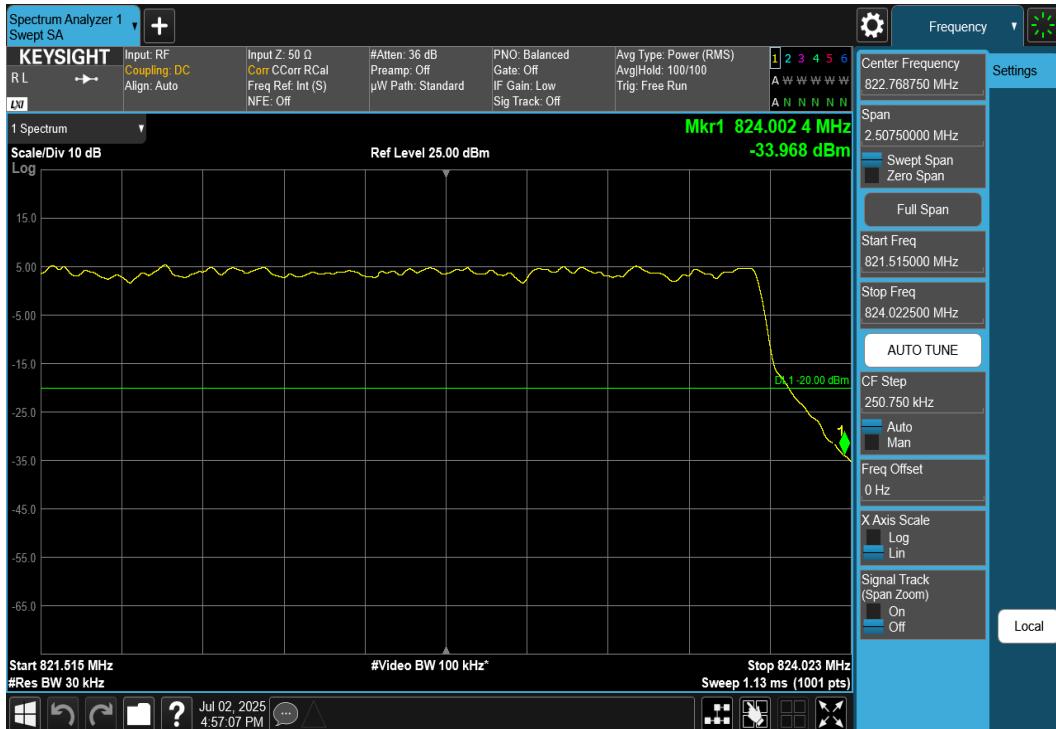

FCC ID: BCG-A3335	 <b>element</b>		PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 67 of 96



Plot 7-93. Channel Edge Plot (NR Band n26, 10MHz DFT-s-OFDM  $\pi/2$  BPSK – Lower Channel)

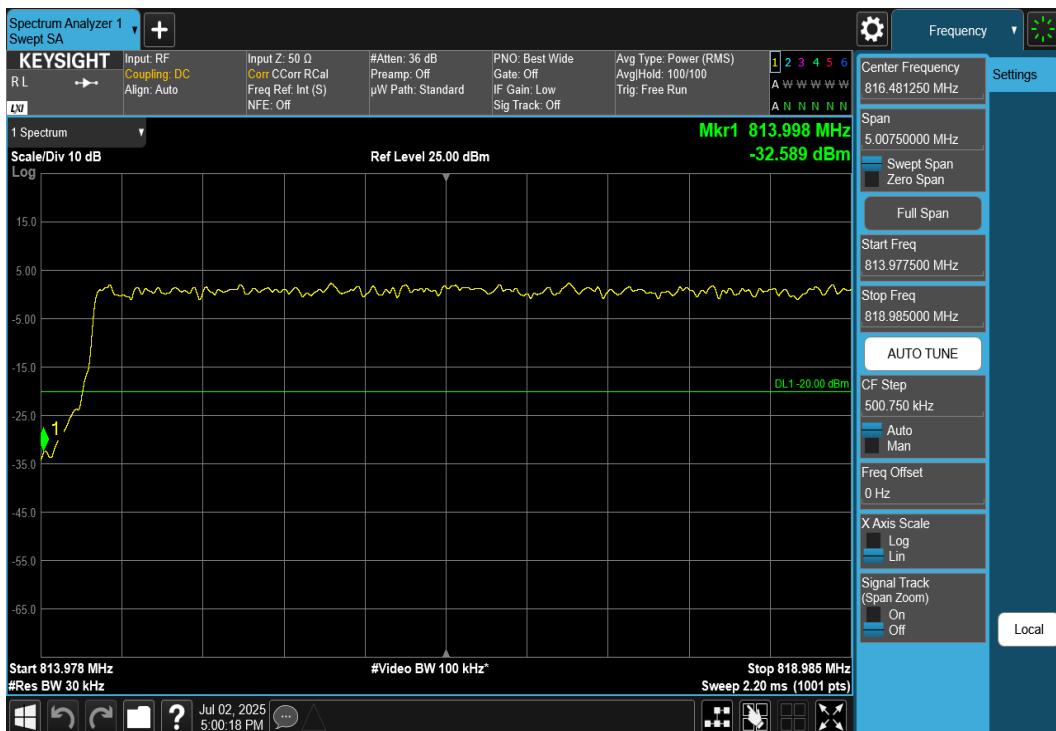

Plot 7-94. Channel Edge Plot (NR Band n26, 10MHz DFT-s-OFDM  $\pi/2$  BPSK – Lower Channel)

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 68 of 96



Plot 7-95. Channel Edge Plot (NR Band n26, 10MHz DFT-s-OFDM  $\pi/2$  BPSK – Upper Channel)



Plot 7-96. Channel Edge Plot (NR Band n26, 10MHz DFT-s-OFDM  $\pi/2$  BPSK – Upper Channel)

FCC ID: BCG-A3335	 <b>element</b>		PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 69 of 96

## NR Band n14



Plot 7-97. Lower Emission Mask Plot (NR Band n14, 5MHz DFT-s-OFDM π/2 BPSK – RB Size 25)



Plot 7-98. Lower Band Edge Plot (NR Band n14, 5MHz DFT-s-OFDM π/2 BPSK – RB Size 25)

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 70 of 96




**Plot 7-99. Upper Band Edge Plot (NR Band n14, 5MHz DFT-s-OFDM  $\pi/2$  BPSK – RB Size 25)**



**Plot 7-100. Upper Emission Mask Plot (NR Band n14, 5MHz DFT-s-OFDM  $\pi/2$  BPSK – RB Size 25)**

FCC ID: BCG-A3335	 <b>element</b>	<b>PART 90 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 71 of 96

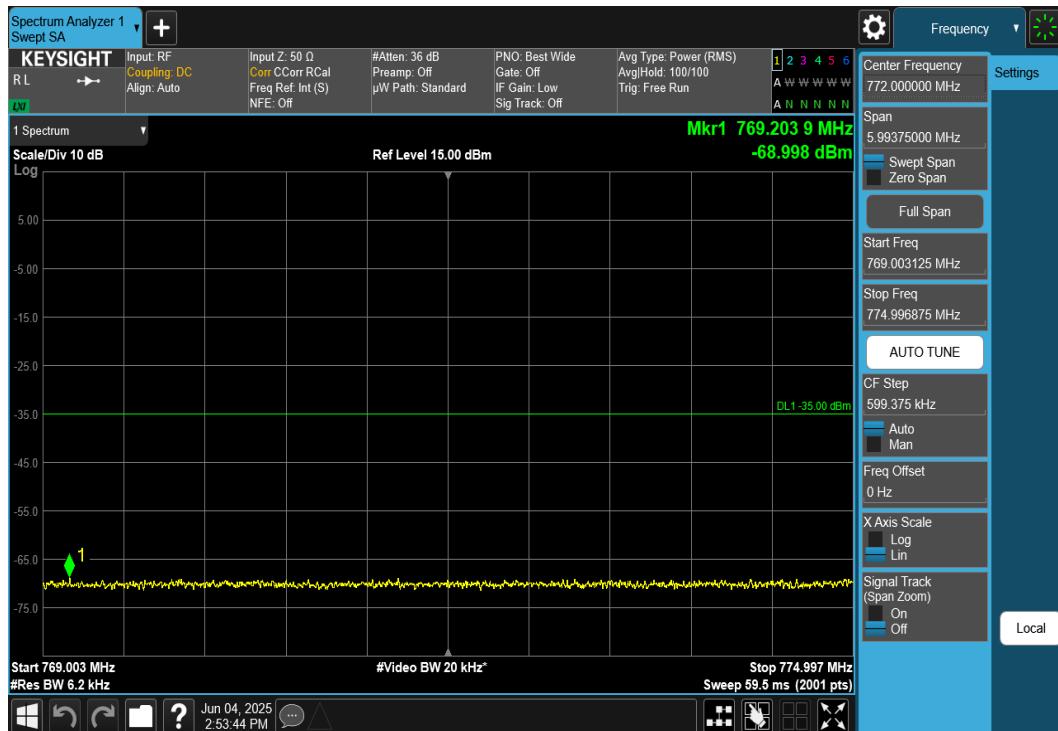


Plot 7-101. Lower Emission Mask Plot (NR Band n14, 10MHz DFT-s-OFDM  $\pi/2$  BPSK – RB Size 50)



Plot 7-102. Lower Band Edge Plot (NR Band n14, 10MHz DFT-s-OFDM  $\pi/2$  BPSK – RB Size 50)

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 72 of 96

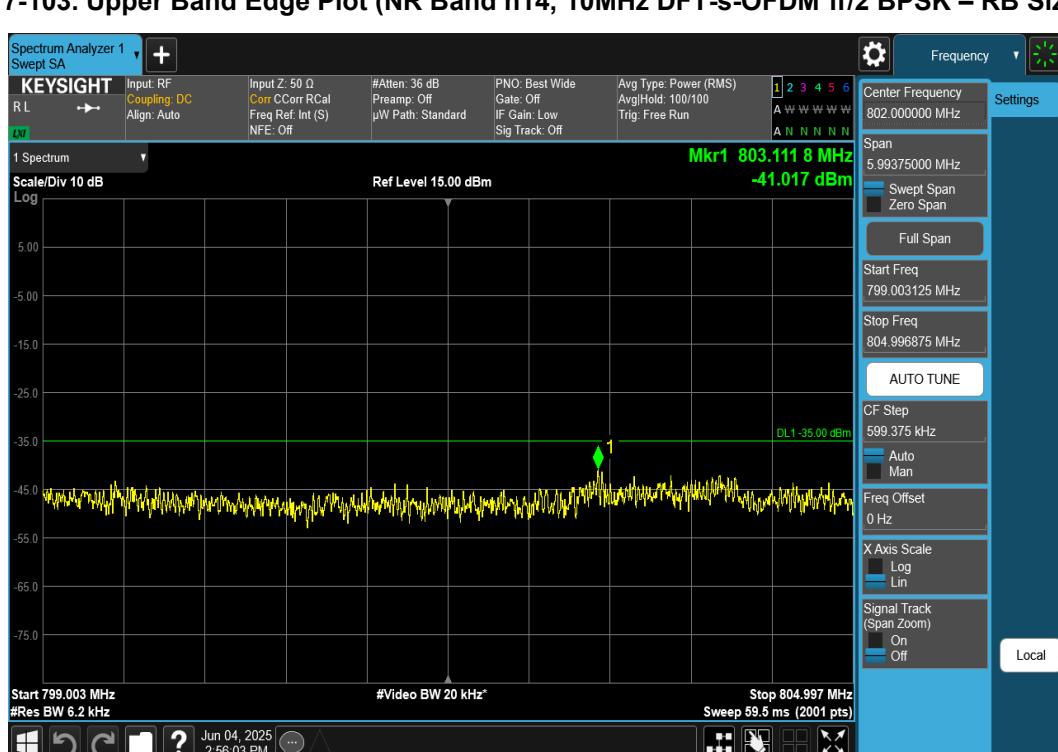

FCC ID: BCG-A3335	 <b>element</b>		PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 73 of 96

## 7.5 Conducted Power Output Data

§2.1046 §90.635

### Test Overview

Conducted power measurements are performed to measure the average output power of the EUT. The averaging is to be performed only over duration of active transmissions at maximum output power level. The average measurements do not include averaging over periods when the transmitter is quiescent or when operating at reduced power level.

### Test Procedures Used

KDB 971168 D01 v03r01

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-7. LTE Conducted Power Measurement Setup




Figure 7-8. FR1 Conducted Power Measurement Setup

### Test Notes

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations and channel bandwidth configurations shown in the tables below.

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 74 of 96

### 7.5.1 Antenna BCM – Conducted Power

Bandwidth	Modulation	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [mW]	Conducted Power Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	814.7	1 / 5	25.69	370.681	50.00	-24.31
		823.3	1 / 3	25.53	357.273	50.00	-24.47
	16-QAM	823.3	1 / 0	24.66	292.415	50.00	-25.34
3 MHz	QPSK	815.5	1 / 0	25.70	371.535	50.00	-24.30
		822.5	1 / 0	25.48	353.183	50.00	-24.52
	16-QAM	815.5	1 / 0	24.46	279.254	50.00	-25.54
5 MHz	QPSK	816.5	1 / 12	25.50	354.813	50.00	-24.50
		821.5	1 / 0	25.66	368.129	50.00	-24.34
	16-QAM	816.5	1 / 12	24.62	289.734	50.00	-25.38
10 MHz	QPSK	819.0	1 / 0	25.59	362.243	50.00	-24.41
	16-QAM	819.0	1 / 49	24.69	294.442	50.00	-25.31

Table 7-2. Antenna BCM Conducted Power Output Data (LTE Band 26)

Bandwidth	Modulation	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [mW]	Conducted Powers Limit [dBm]	Margin [dB]
5 MHz	$\pi/2$ BPSK	816.5	1 / 0	25.70	371.535	50.00	-24.30
		819.0	1 / 12	25.54	358.096	50.00	-24.46
		821.5	1 / 12	25.66	368.129	50.00	-24.34
	QPSK	816.5	1 / 0	25.58	361.410	50.00	-24.42
		819.0	1 / 12	25.65	367.282	50.00	-24.35
		821.5	1 / 0	25.68	369.828	50.00	-24.32
	16-QAM	816.5	1 / 12	24.67	293.089	50.00	-25.33
	64-QAM	819.0	1 / 12	23.71	234.963	50.00	-26.29
	$\pi/2$ BPSK	819.0	1 / 51	25.48	353.183	50.00	-24.52
10 MHz	QPSK	819.0	1 / 0	25.50	354.813	50.00	-24.50
	16-QAM	819.0	1 / 51	24.50	281.838	50.00	-25.50
	64-QAM	819.0	1 / 25	23.67	232.809	50.00	-26.33

Table 7-3. Antenna BCM Conducted Power Output Data (NR Band n26)

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch			

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Page 75 of 96

## 7.6 Radiated Power (ERP)

§90.542(a)(7)

### Test Overview

Effective Radiated Power (ERP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.17

### Test Settings

The relevant equation for determining the ERP from the conducted RF output power measured is:

$$\text{ERP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

ERP = Effective Radiated Power (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP)

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-9. LTE ERP Measurement Setup




Figure 7-10. FR1 ERP Measurement Setup

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 76 of 96

**Test Notes**

- 1) The worst case emissions are reported with the modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4) The Ant. Gains (GT) are listed in dBi.

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 77 of 96

### 7.6.1 Antenna BCM – ERP

Bandwidth	Modulation	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [mW]	ERP Limit [dBm]	Margin [dB]
5 MHz	QPSK	790.5	-27.80	1 / 12	25.54	-4.41	0.362	34.77	-39.18
		793.0	-27.80	1 / 24	25.61	-4.34	0.368	34.77	-39.11
		795.5	-27.80	1 / 0	25.68	<b>-4.27</b>	0.374	34.77	-39.04
10 MHz	16-QAM	795.5	-27.80	1 / 24	24.65	-5.30	0.295	34.77	-40.07
	QPSK	793.0	-27.80	1 / 49	25.69	<b>-4.26</b>	0.375	34.77	-39.03
10 MHz	16-QAM	793.0	-27.80	1 / 0	24.62	-5.33	0.293	34.77	-40.10

**Table 7-4. Antenna BCM ERP Data (LTE Band 14)**

Bandwidth	Modulation	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [mW]	ERP Limit [dBm]	Margin [dB]
5 MHz	$\pi/2$ BPSK	790.5	-27.80	1 / 24	25.70	<b>-4.25</b>	0.376	34.77	-39.02
		793.0	-27.80	1 / 12	25.43	-4.52	0.353	34.77	-39.29
		795.5	-27.80	1 / 12	25.55	-4.40	0.363	34.77	-39.17
	QPSK	790.5	-27.80	1 / 0	25.63	-4.32	0.370	34.77	-39.09
		793.0	-27.80	1 / 0	25.63	-4.32	0.370	34.77	-39.09
		795.5	-27.80	1 / 12	25.66	<b>-4.29</b>	0.372	34.77	-39.06
	16-QAM	790.5	-27.80	1 / 12	24.60	-5.35	0.292	34.77	-40.12
	64-QAM	795.5	-27.80	1 / 12	23.70	-6.25	0.237	34.77	-41.02
10 MHz	$\pi/2$ BPSK	793.0	-27.80	1 / 25	25.59	<b>-4.36</b>	0.366	34.77	-39.13
	QPSK	793.0	-27.80	1 / 0	25.58	<b>-4.37</b>	0.366	34.77	-39.14
	16-QAM	793.0	-27.80	1 / 25	24.71	-5.24	0.299	34.77	-40.01
	64-QAM	793.0	-27.80	1 / 51	23.53	-6.42	0.228	34.77	-41.19

**Table 7-5. Antenna BCM ERP Data (NR Band n14)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch				

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Page 78 of 96

## 7.7 Radiated Spurious Emissions

§2.1053 §90.691(a) §90.543(e)

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 79 of 96

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

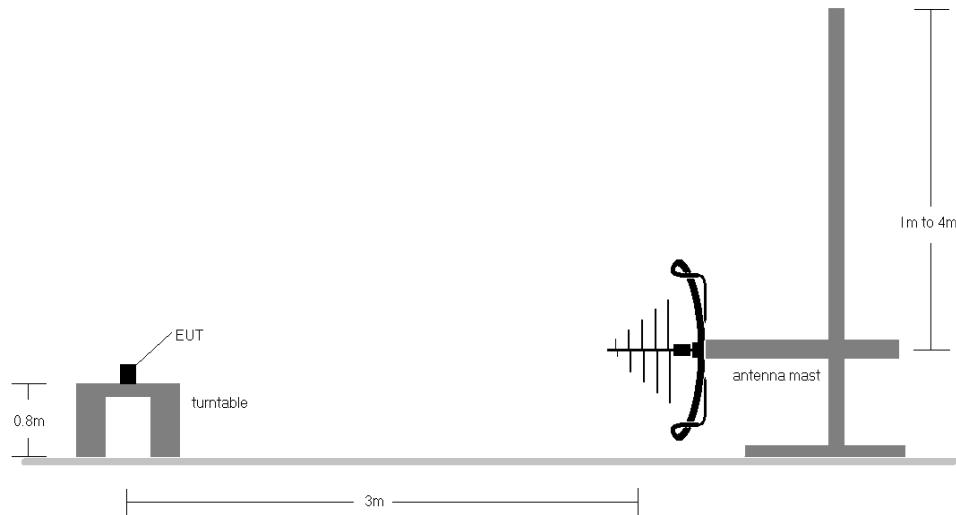

**Figure 7-11. Test Instrument & Measurement Setup < 1GHz**

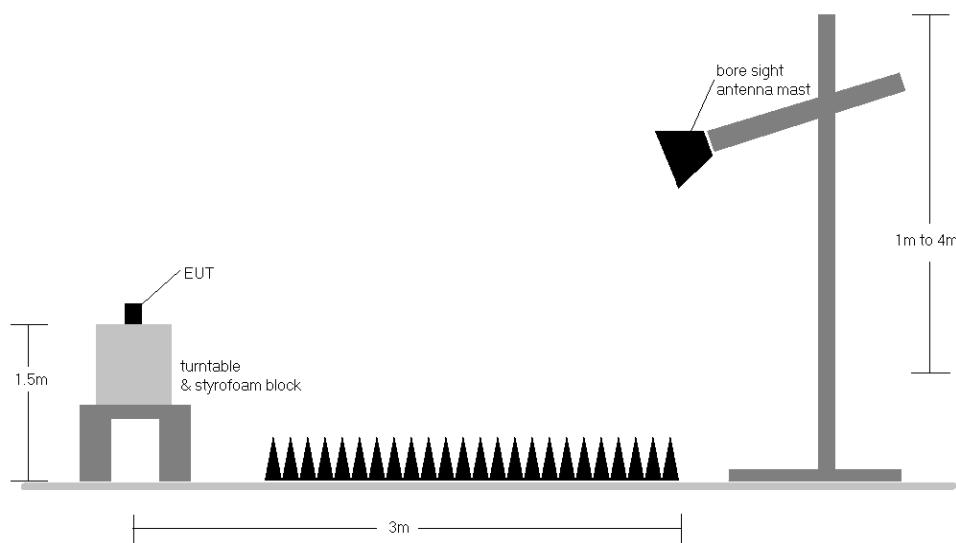

**Figure 7-12. Test Instrument & Measurement Setup >1 GHz**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 80 of 96


**Test Notes**

1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - a.  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b.  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.


FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 81 of 96

## 7.7.1 Antenna BCM – Radiated Spurious Emission Measurements

### LTE Band 26

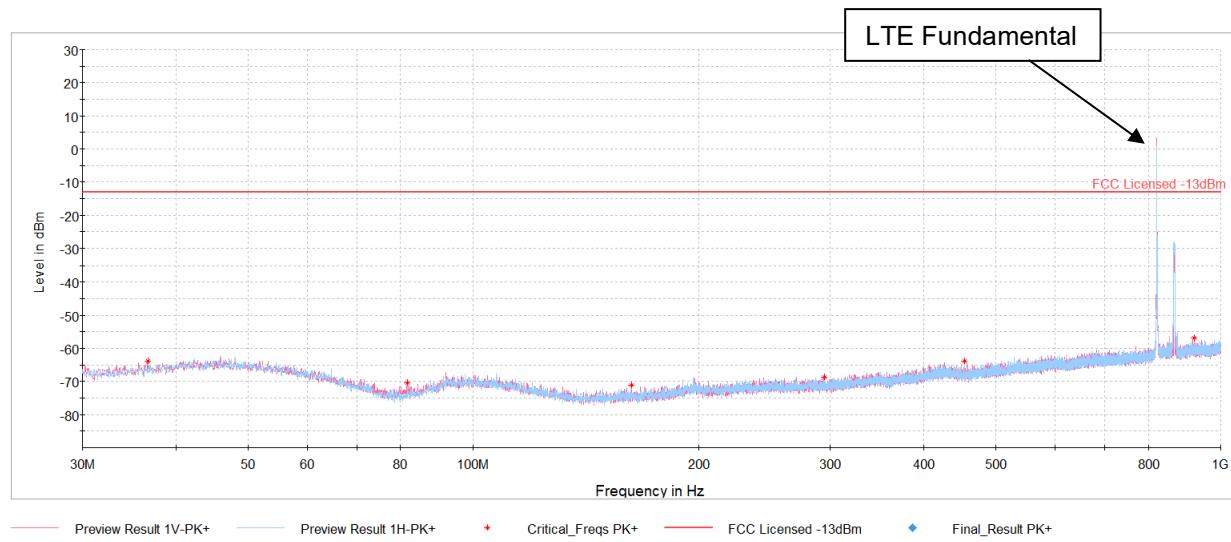

**Plot 7-105. Antenna BCM Radiated Spurious Plot Below 1GHz (LTE Band 26)**

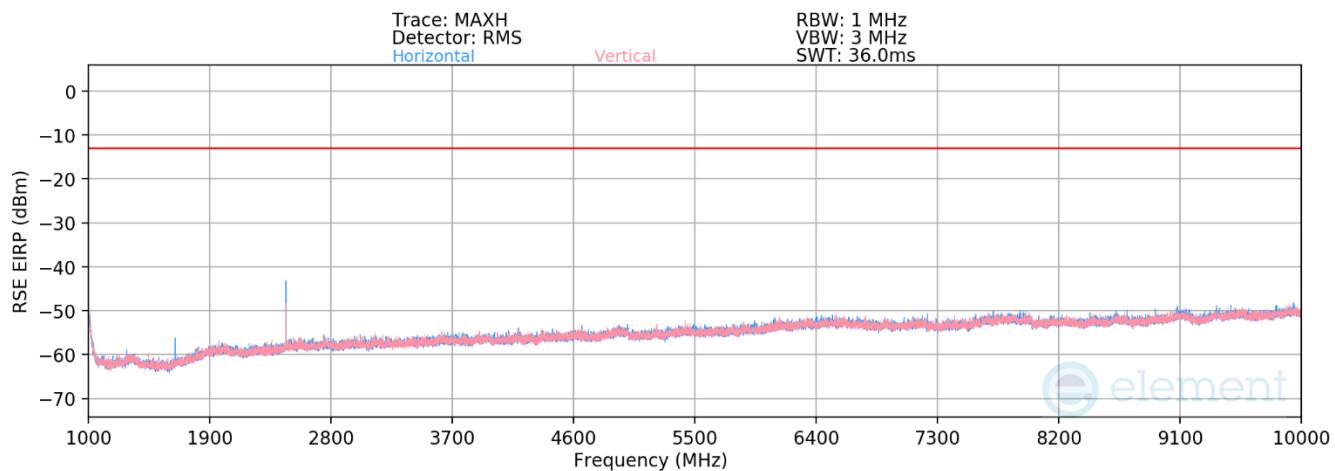

**Plot 7-106. Antenna BCM Radiated Spurious Plot Above 1GHz (LTE Band 26)**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 82 of 96

Bandwidth (MHz):	5
Frequency (MHz):	816.5
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1633.0	H	168	347	-74.08	-2.36	30.56	-64.70	-13.00	-51.70
2449.5	H	100	41	-61.67	1.99	47.32	-47.94	-13.00	-34.94
3266.0	H	-	-	-78.97	4.35	32.38	-62.87	-13.00	-49.87
4082.5	H	-	-	-79.76	6.11	33.34	-61.91	-13.00	-48.91
4899.0	V	-	-	-80.65	7.99	34.35	-60.91	-13.00	-47.91

**Table 7-6. Antenna BCM Radiated Spurious Data (LTE Band 26 – Low Channel)**

Bandwidth (MHz):	10
Frequency (MHz):	819.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1638.0	H	160	318	-74.50	-2.36	30.14	-65.12	-13.00	-52.12
2457.0	H	132	45	-60.86	2.31	48.45	-46.81	-13.00	-33.81
3276.0	H	-	-	-79.08	4.38	32.30	-62.95	-13.00	-49.95
4095.0	V	-	-	-79.79	6.11	33.31	-61.94	-13.00	-48.94
4914.0	V	-	-	-80.58	7.99	34.42	-60.84	-13.00	-47.84

**Table 7-7. Antenna BCM Radiated Spurious Data (LTE Band 26 – Mid Channel)**

Bandwidth (MHz):	5
Frequency (MHz):	821.5
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1643.0	H	109	234	-75.62	-2.36	29.02	-66.24	-13.00	-53.24
2464.5	H	136	2	-58.78	2.47	50.69	-44.57	-13.00	-31.57
3286.0	H	-	-	-79.14	4.36	32.22	-63.04	-13.00	-50.04
4107.5	H	-	-	-79.87	6.18	33.32	-61.94	-13.00	-48.94
4929.0	V	-	-	-80.71	8.21	34.50	-60.75	-13.00	-47.75

**Table 7-8. Antenna BCM Radiated Spurious Data (LTE Band 26 – High Channel)**


FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch				

V2.2 09/07/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Page 83 of 96

## LTE Band 14

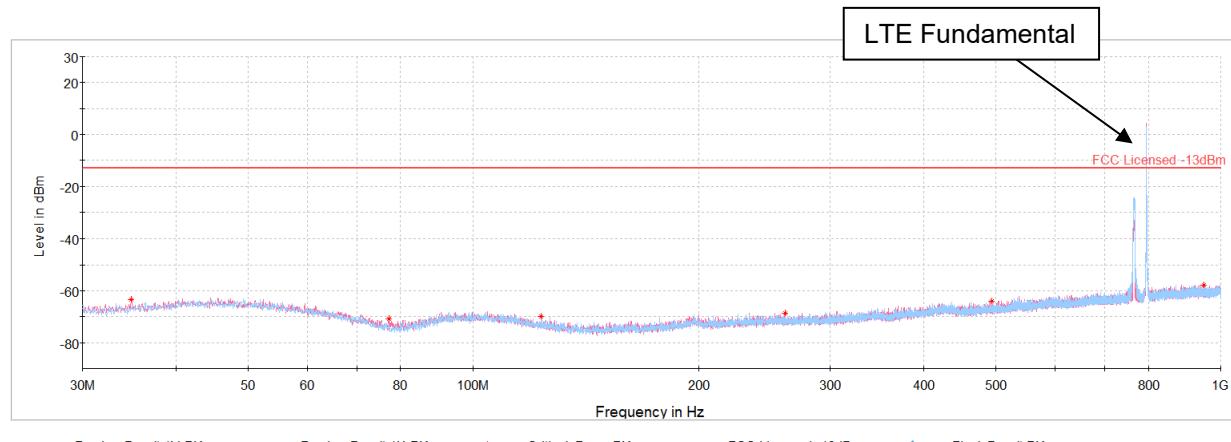

**Plot 7-107. Antenna BCM Radiated Spurious Plot Below 1GHz (LTE Band 14)**

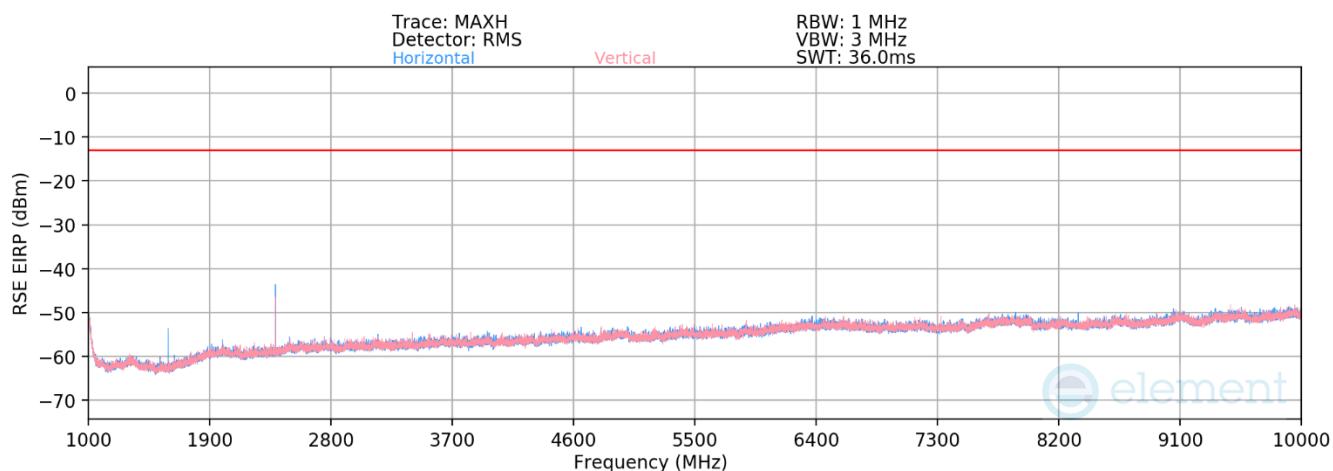

**Plot 7-108. Antenna BCM Radiated Spurious Plot Above 1GHz (LTE Band 14)**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 84 of 96

Bandwidth (MHz):	5
Frequency (MHz):	790.5
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1581.0	H	255	164	-75.73	-2.41	28.86	-66.40	-40.00	-26.40
2371.5	H	145	354	-63.70	1.60	44.90	-50.36	-13.00	-37.36
3162.0	V	-	-	-78.63	4.33	32.70	-62.55	-13.00	-49.55
3952.5	V	-	-	-79.34	5.76	33.42	-61.84	-13.00	-48.84
4743.0	H	-	-	-80.76	7.77	34.01	-61.25	-13.00	-48.25

**Table 7-9. Antenna BCM Radiated Spurious Data (LTE Band 14 – Low Channel)**

Bandwidth (MHz):	10
Frequency (MHz):	793.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1586.0	H	285	133	-75.36	-2.41	29.23	-66.03	-40.00	-26.03
2379.0	H	158	4	-63.32	1.56	45.24	-50.02	-13.00	-37.02
3172.0	H	-	-	-79.12	4.39	32.27	-62.98	-13.00	-49.98
3965.0	V	-	-	-79.09	5.85	33.76	-61.49	-13.00	-48.49
4758.0	H	-	-	-80.76	7.92	34.16	-61.10	-13.00	-48.10

**Table 7-10. Antenna BCM Radiated Spurious Data (LTE Band 14 – Mid Channel)**

Bandwidth (MHz):	5
Frequency (MHz):	795.5
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 12



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1591.0	H	110	350	-72.77	-2.41	31.82	-63.44	-40.00	-23.44
2386.5	H	130	359	-60.91	1.56	47.66	-47.60	-13.00	-34.60
3182.0	V	-	-	-78.86	4.31	32.45	-62.81	-13.00	-49.81
3977.5	H	-	-	-79.66	5.85	33.19	-62.07	-13.00	-49.07
4773.0	H	-	-	-80.79	7.53	33.75	-61.51	-13.00	-48.51

**Table 7-11. Antenna BCM Radiated Spurious Data (LTE Band 14 – High Channel)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch				

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

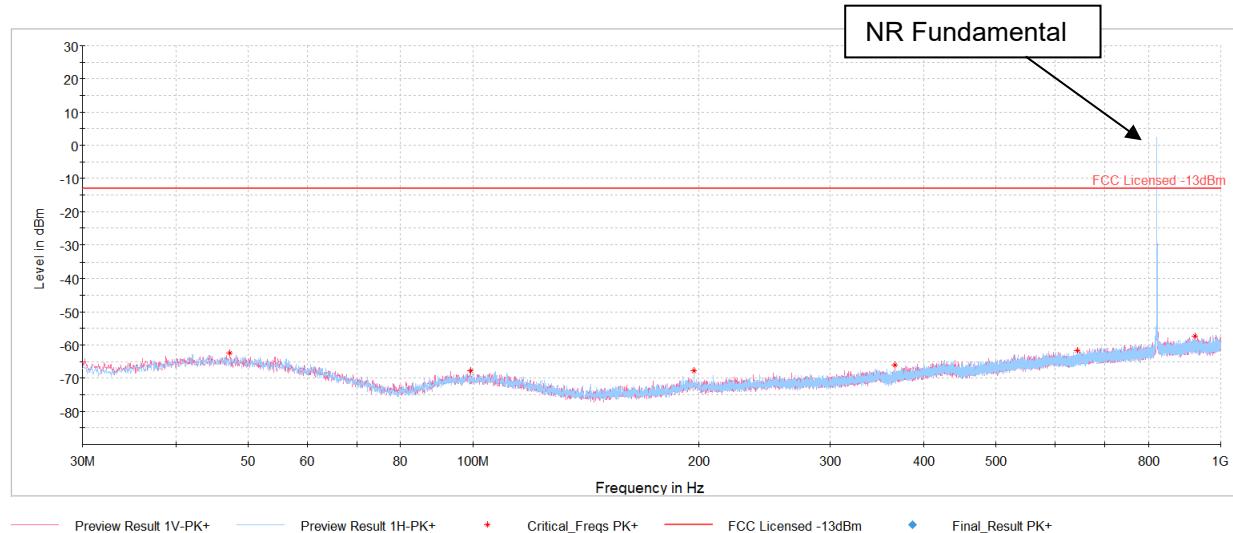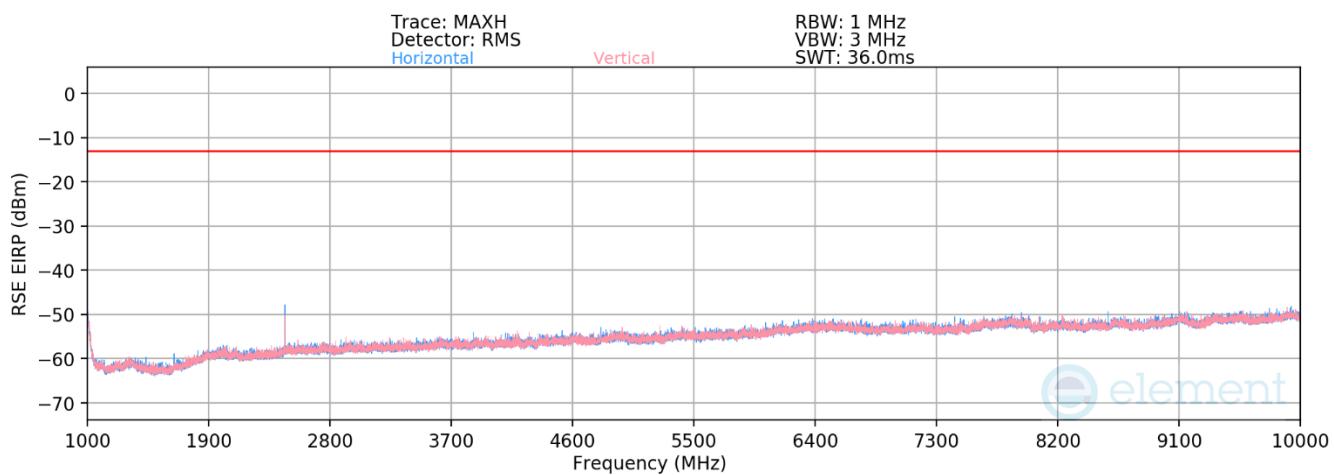**NR Band n26**

**Plot 7-109. Antenna BCM Radiated Spurious Plot Below 1GHz (NR Band n26)**

**Plot 7-110. Antenna BCM Radiated Spurious Plot Above 1GHz (NR Band n26)**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 86 of 96

Bandwidth (MHz):	5
Frequency (MHz):	816.5
Modulation Signal:	QPSK
RB / Offset:	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1633.0	H	338	117	-75.44	-2.36	29.19	-66.06	-13.00	-53.06
2449.5	H	241	195	-66.87	1.99	42.12	-53.14	-13.00	-40.14
3266.0	H	-	-	-79.11	4.36	32.25	-63.01	-13.00	-50.01
4082.5	H	-	-	-79.80	6.11	33.31	-61.95	-13.00	-48.95
4899.0	H	-	-	-80.61	7.99	34.38	-60.87	-13.00	-47.87

**Table 7-12. Antenna BCM Radiated Spurious Data (NR Band n26 – Low Channel)**

Bandwidth (MHz):	10
Frequency (MHz):	819.0
Modulation Signal:	QPSK
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1638.0	H	138	357	-69.46	-2.36	35.18	-60.08	-13.00	-47.08
2457.0	H	105	149	-66.48	2.31	42.83	-52.43	-13.00	-39.43
3276.0	H	-	-	-78.79	4.38	32.59	-62.67	-13.00	-49.67
4095.0	H	-	-	-79.87	6.11	33.24	-62.02	-13.00	-49.02
4914.0	H	-	-	-80.61	8.17	34.56	-60.69	-13.00	-47.69

**Table 7-13. Antenna BCM Radiated Spurious Data (NR Band n26 – Mid Channel)**

Bandwidth (MHz):	5
Frequency (MHz):	821.5
Modulation Signal:	QPSK
RB / Offset:	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1643.0	H	237	353	-75.78	-2.36	28.86	-66.40	-13.00	-53.40
2464.5	H	219	165	-66.60	2.47	42.87	-52.39	-13.00	-39.39
3286.0	H	-	-	-79.12	4.36	32.24	-63.02	-13.00	-50.02
4107.5	H	-	-	-80.18	6.47	33.30	-61.96	-13.00	-48.96
4929.0	H	-	-	-80.56	7.99	34.43	-60.83	-13.00	-47.83



**Table 7-14. Antenna BCM Radiated Spurious Data (NR Band n26 – High Channel)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch				

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Page 87 of 96

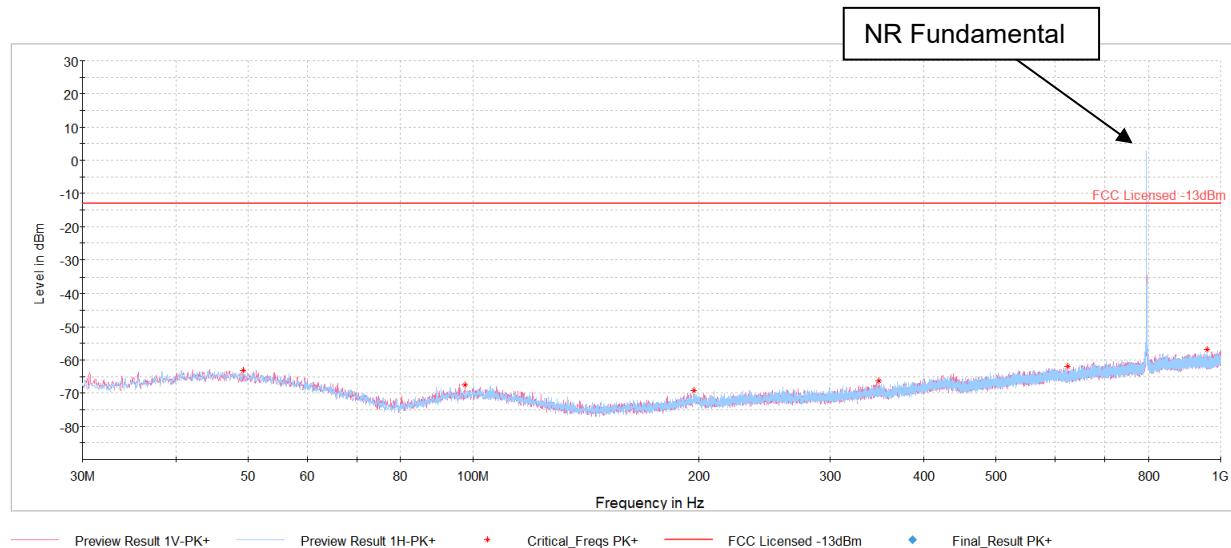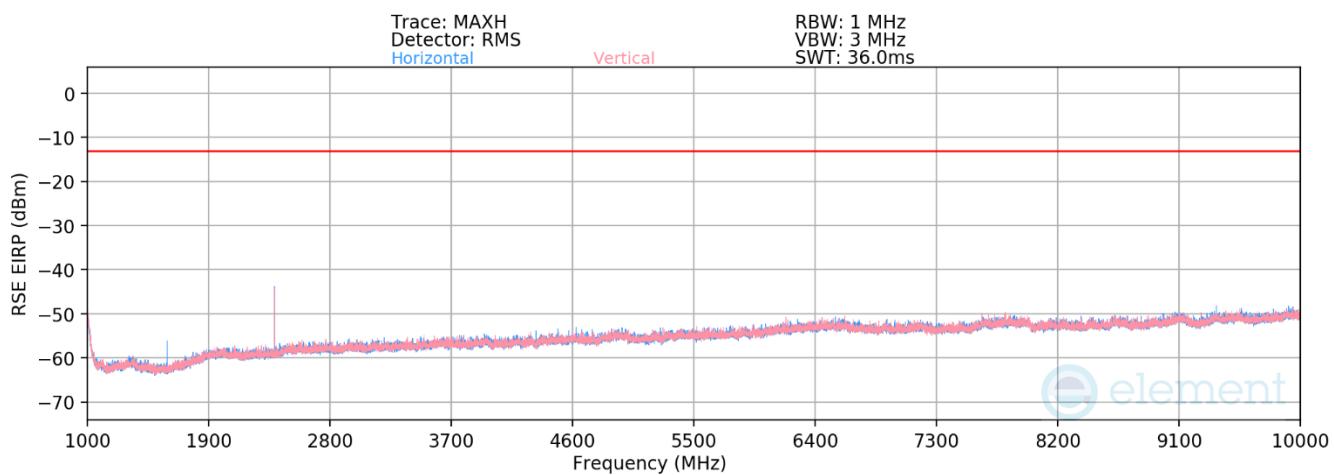**NR Band n14**

**Plot 7-111. Antenna BCM Radiated Spurious Plot Below 1GHz (NR Band n14)**

**Plot 7-112. Antenna BCM Radiated Spurious Plot Above 1GHz (NR Band n14)**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 88 of 96

Bandwidth (MHz):	5
Frequency (MHz):	790.5
Modulation Signal:	QPSK
RB / Offset:	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1581.0	H	164	220	-74.81	-2.41	29.78	-65.48	-40.00	-25.48
2371.5	H	248	152	-72.71	1.60	35.89	-59.37	-13.00	-46.37
3162.0	H	-	-	-78.93	4.33	32.40	-62.86	-13.00	-49.86
3952.5	H	-	-	-79.37	5.85	33.48	-61.78	-13.00	-48.78
4743.0	H	-	-	-81.01	7.92	33.91	-61.35	-13.00	-48.35

**Table 7-15. Antenna BCM Radiated Spurious Data (NR Band n14 – Low Channel)**

Bandwidth (MHz):	10
Frequency (MHz):	793.0
Modulation Signal:	QPSK
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1586.0	H	-	-	-76.76	-2.41	27.83	-67.43	-40.00	-27.43
2379.0	H	232	149	-69.84	1.56	38.72	-56.54	-13.00	-43.54
3172.0	H	-	-	-78.99	4.34	32.35	-62.90	-13.00	-49.90
3965.0	H	-	-	-79.30	5.76	33.46	-61.80	-13.00	-48.80
4758.0	H	-	-	-80.39	7.85	34.46	-60.79	-13.00	-47.79

**Table 7-16. Antenna BCM Radiated Spurious Data (NR Band n14 – Mid Channel)**

Bandwidth (MHz):	5
Frequency (MHz):	795.5
Modulation Signal:	QPSK
RB / Offset:	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1591.0	H	143	14	-74.24	-2.41	30.35	-64.91	-40.00	-24.91
2386.5	H	251	234	-68.70	1.56	39.86	-55.39	-13.00	-42.39
3182.0	H	-	-	-78.85	4.39	32.54	-62.72	-13.00	-49.72
3977.5	H	-	-	-79.33	5.77	33.44	-61.82	-13.00	-48.82
4773.0	H	-	-	-80.91	7.82	33.91	-61.35	-13.00	-48.35

**Table 7-17. Antenna BCM Radiated Spurious Data (NR Band n14 – High Channel)**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch				

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Page 89 of 96

## 7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Band 26, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Band 14 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.


FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 90 of 96

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


V2.2 09/07/2023

## Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber. For LTE testing, in addition, the EUT was connected to a communication tester via an attenuated RF coupler.

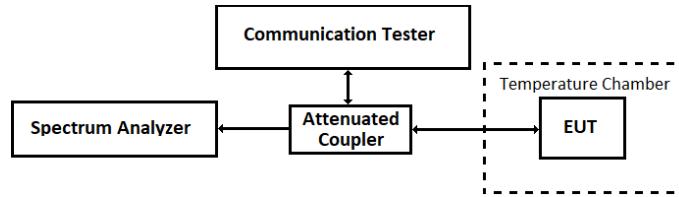

**Figure 7-13. LTE Test Instrument & Measurement Setup**

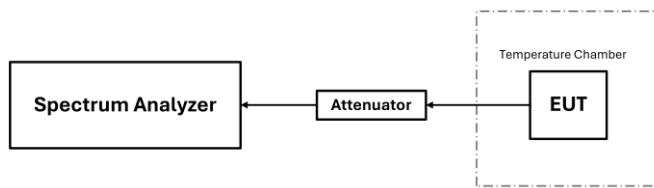

**Figure 7-14. FR1 Test Instrument & Measurement Setup**

## Test Notes

N/A

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 91 of 96

**Frequency Stability / Temperature Variation**

<b>LTE Band 26</b>											
<table border="1"> <tr> <td>Operating Frequency (GHz):</td><td>0.819</td></tr> <tr> <td>Ref. Voltage (VDC):</td><td>3.80</td></tr> <tr> <td>Deviation Limit:</td><td><math>\pm 0.00025\%</math> or 2.5 ppm</td></tr> </table>						Operating Frequency (GHz):	0.819	Ref. Voltage (VDC):	3.80	Deviation Limit:	$\pm 0.00025\%$ or 2.5 ppm
Operating Frequency (GHz):	0.819										
Ref. Voltage (VDC):	3.80										
Deviation Limit:	$\pm 0.00025\%$ or 2.5 ppm										
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (GHz)	Freq. Dev. (GHz)	Deviation (%)						
100 %	3.80	- 30	0.819000012	0.000000000	0.000000040						
		- 20	0.819000008	-0.000000004	-0.000000499						
		- 10	0.819000010	-0.000000002	-0.000000253						
		0	0.819000010	-0.000000002	-0.000000223						
		+ 10	0.819000009	-0.000000003	-0.000000377						
		+ 20 (Ref)	0.819000012	-0.000000001	-0.000000127						
		+ 30	0.819000007	-0.000000005	-0.000000560						
		+ 40	0.819000013	0.000000001	0.000000081						
		+ 50	0.819000009	-0.000000003	-0.000000397						
		Battery Endpoint	3.40	+ 20	0.819000009						
-0.000000003											

**Table 7-18. LTE Band 26 Frequency Stability Data**

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 92 of 96

**Frequency Stability / Temperature Variation**

<b>LTE Band 14</b>				
Operating Band Lower Boundary (GHz)		0.788		
Ref. Voltage (VDC):		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.788382513	-0.000382513
		- 20	0.788392290	-0.000392290
		- 10	0.788385616	-0.000385616
		0	0.788398463	-0.000398463
		+ 10	0.788389352	-0.000389352
		+ 20 (Ref)	0.788376085	-0.000376085
		+ 30	0.788382255	-0.000382255
		+ 40	0.788352913	-0.000352913
		+ 50	0.788386622	-0.000386622
		Battery Endpoint	0.788385624	-0.000385624

**Table 7-19. LTE Band 14 Lower Boundary Frequency Stability Data**

<b>LTE Band 14</b>				
Operating Band Upper Boundary (GHz)		0.798		
Ref. Voltage (VDC):		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.797622455	-0.000377545
		- 20	0.797586071	-0.000413929
		- 10	0.797619180	-0.000380820
		0	0.797583262	-0.000416738
		+ 10	0.797616746	-0.000383254
		+ 20 (Ref)	0.797625393	-0.000374607
		+ 30	0.797616816	-0.000383184
		+ 40	0.797602853	-0.000397147
		+ 50	0.797614385	-0.000385615
		Battery Endpoint	0.797580998	-0.000419002

**Table 7-20. LTE Band 14 Upper Boundary Frequency Stability Data**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 93 of 96

## Frequency Stability / Temperature Variation

<b>NR Band n26</b>					
		Operating Frequency (GHz):	0.819		
		Ref. Voltage (VDC):	3.80		
		Deviation Limit:	$\pm 0.00025\%$ or 2.5 ppm		
<b>Voltage (%)</b>	<b>Power (VDC)</b>	<b>Temp (°C)</b>	<b>Frequency (GHz)</b>	<b>Freq. Dev. (GHz)</b>	<b>Deviation (%)</b>
100 %	3.80	- 30	0.818991435	-0.000001986	-0.000242554
		- 20	0.818992127	-0.000001295	-0.000158060
		- 10	0.818991901	-0.000001520	-0.000185655
		0	0.818992528	-0.000000893	-0.000109097
		+ 10	0.818991518	-0.000001904	-0.000232480
		+ 20 (Ref)	0.818993422	-0.000001892	-0.000231015
		+ 30	0.818991682	-0.000001740	-0.000212456
		+ 40	0.818991572	-0.000001850	-0.000225887
		+ 50	0.818991835	-0.000001587	-0.000193713
		Battery Endpoint	3.40	+ 20	0.818992351
				-0.000001070	-0.000130709

**Table 7-21. NR Band n26 Frequency Stability Data**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 94 of 96

**Frequency Stability / Temperature Variation**

<b>NR Band n14</b>				
Operating Band Lower Boundary (GHz)		0.788		
Ref. Voltage (VDC):		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.788190644	-0.000190644
		- 20	0.788191893	-0.000191893
		- 10	0.788191460	-0.000191460
		0	0.788192288	-0.000192288
		+ 10	0.788193723	-0.000193723
		+ 20 (Ref)	0.788191343	-0.000191343
		+ 30	0.788191448	-0.000191448
		+ 40	0.788215612	-0.000215612
		+ 50	0.788220889	-0.000220889
		Battery Endpoint	0.788200464	-0.000200464

**Table 7-22. NR Band n14 Lower Boundary Frequency Stability Data**

<b>NR Band n14</b>				
Operating Band Upper Boundary (GHz)		0.798		
Ref. Voltage (VDC):		3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	0.797792722	-0.000207278
		- 20	0.797796431	-0.000203569
		- 10	0.797794084	-0.000205916
		0	0.797793500	-0.000206500
		+ 10	0.797793674	-0.000206326
		+ 20 (Ref)	0.797798037	-0.000201963
		+ 30	0.797787620	-0.000212380
		+ 40	0.797758390	-0.000241610
		+ 50	0.797749518	-0.000250482
		Battery Endpoint	0.797788994	-0.000211006

**Table 7-23. NR Band n14 Upper Boundary Frequency Stability Data**

FCC ID: BCG-A3335	 element	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch		Page 95 of 96

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Watch FCC ID: BCG-A3335** complies with all the requirements of Part 90 of the FCC rules.

FCC ID: BCG-A3335	PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2503270032-05.BCG	Test Dates: 1/17/2025 - 7/25/2025	EUT Type: Watch	Page 96 of 96