

APPENDIX A: SAR TEST PLOTS

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: PGWQ6

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 680.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.500$ MHz; $\text{cond} = 0.870$ S/m; $\text{perm} = 40.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 7/7/2025; Ambient Temp: 21.6°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 71, Exp: Head| Front Side, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.006 W/kg

Smallest distance from peaks to all points 3 dB below is 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.1 %

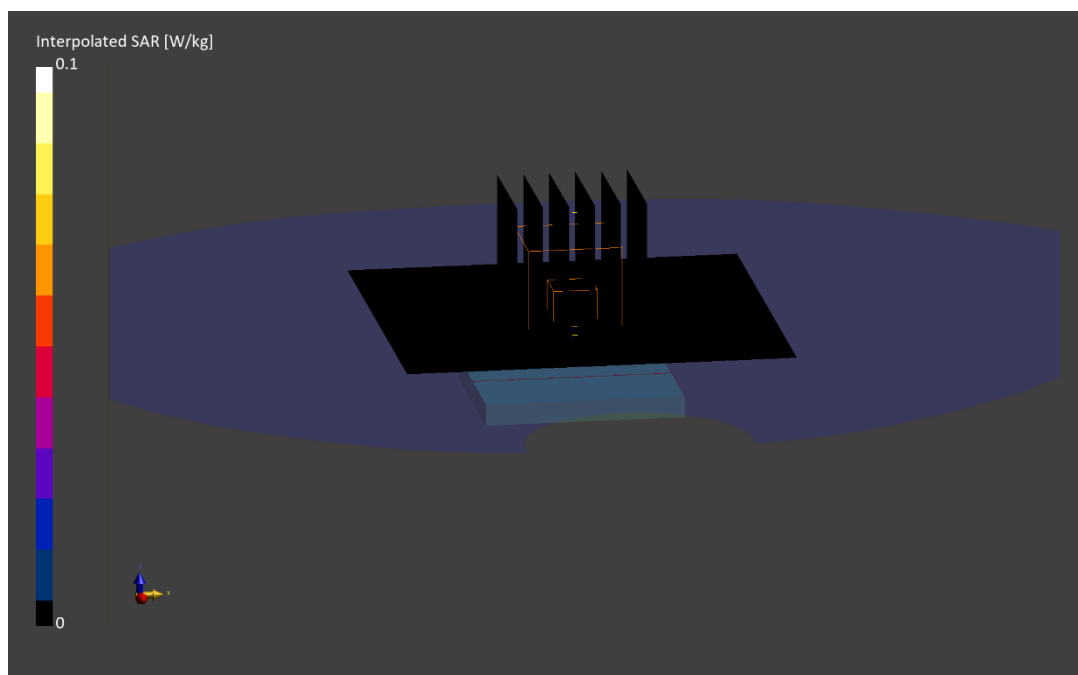

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 7C5HV

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 680.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.500$ MHz; $\text{cond} = 0.885$ S/m; $\text{perm} = 41.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/28/2025; Ambient Temp: 22.6°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 71, Exp: Extremity| Back Side, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (36.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.22 W/kg; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below is 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.7 %

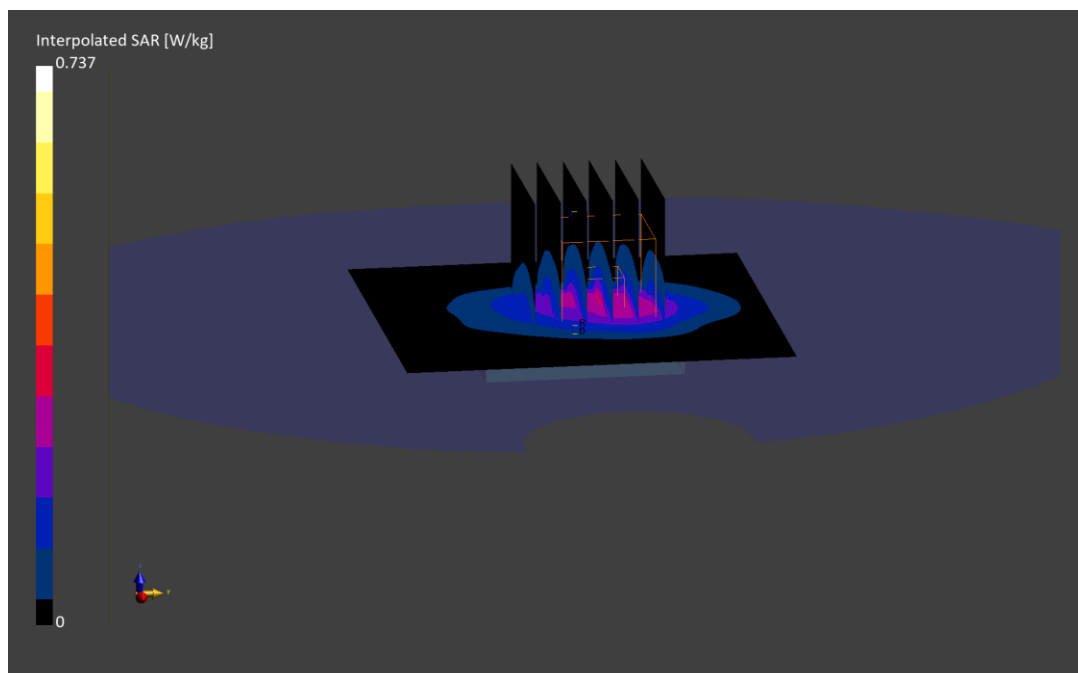

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 6H2HJ

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500$ MHz; $\text{cond} = 0.867$ S/m; $\text{perm} = 40.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/05/2025; Ambient Temp: 23.2°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3837; ConvF:(9.29,8.68,8.73); Calibrated: 2024-09-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 12, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below is 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

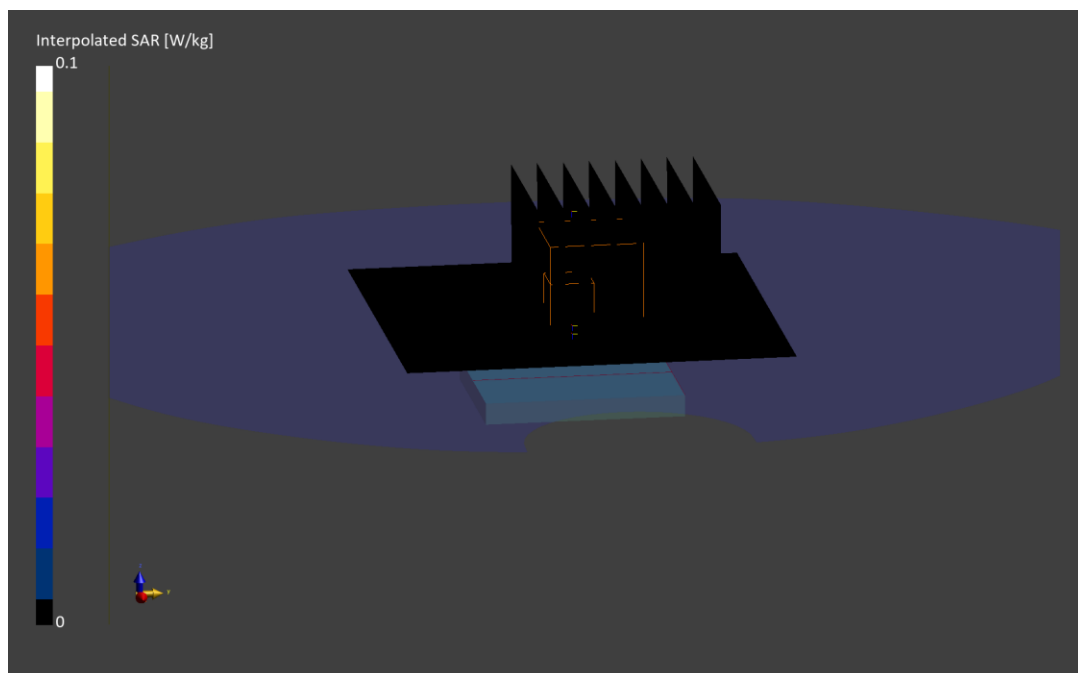

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: VC9MJ

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500$ MHz; $\text{cond} = 0.869$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 7/5/2025; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 12, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=4.8$ mm, $dy=4.8$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.31 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below is 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.5 %

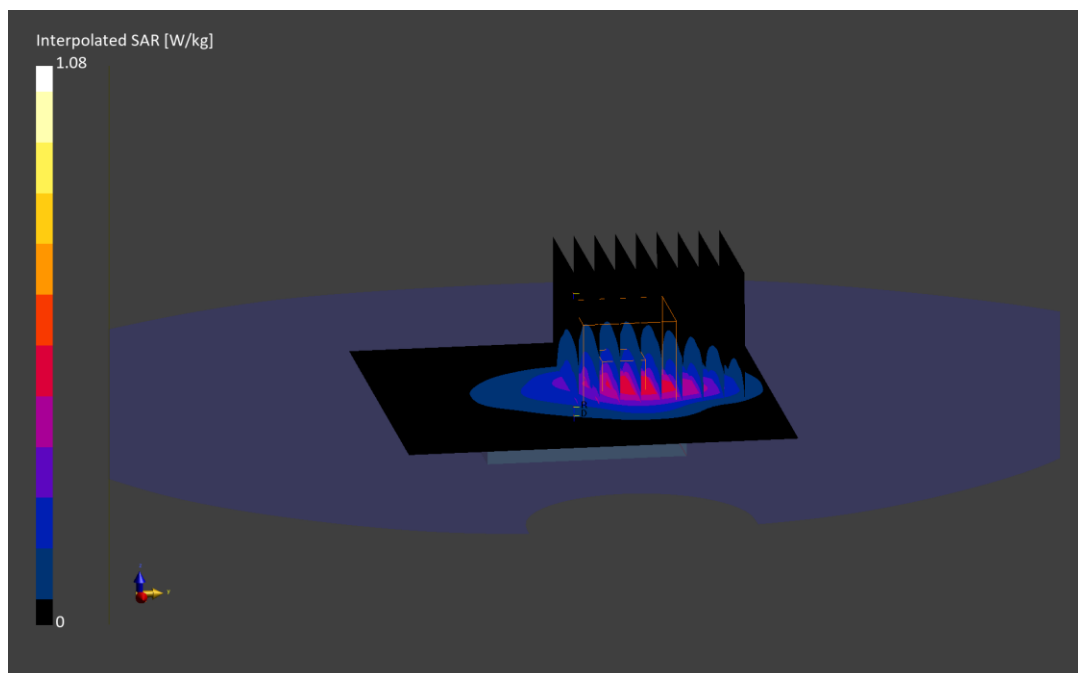

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 7WL4K

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 782.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 782.000$ MHz; $\text{cond} = 0.910$ S/m; $\text{perm} = 41.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 7/7/2025; Ambient Temp: 22.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3837; ConvF:(9.29,8.68,8.73); Calibrated: 2024-09-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 13, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below is 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 96.5 %

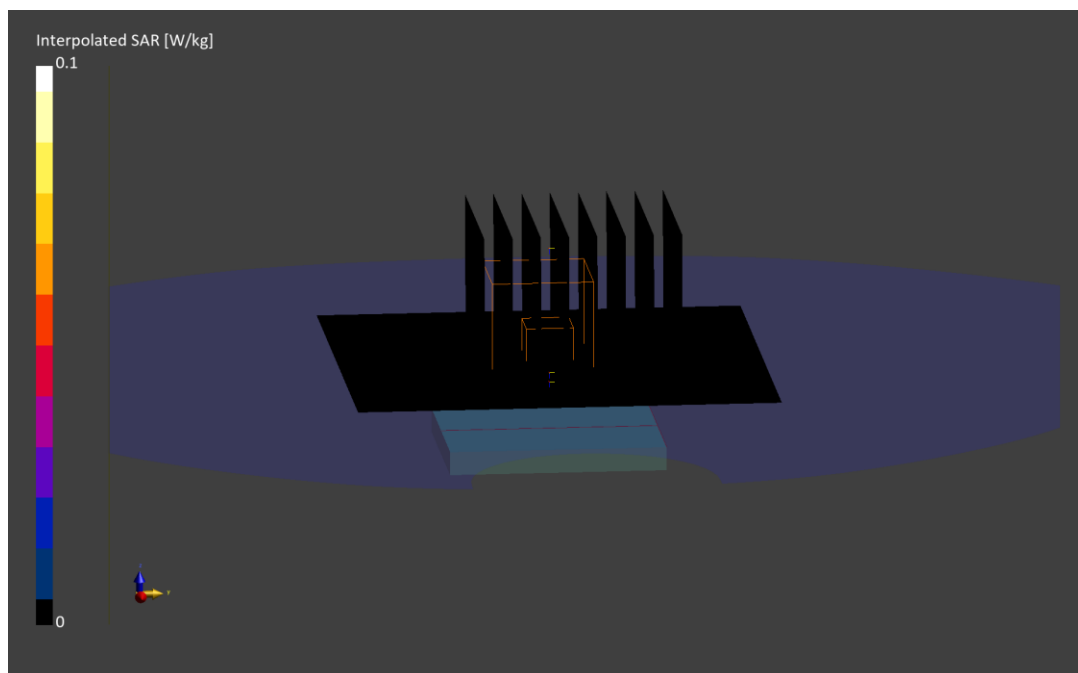

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 9DLVL

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 782.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 782.000$ MHz; $\text{cond} = 0.895$ S/m; $\text{perm} = 40.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 7/5/2025; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 13, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.22 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 58.3 %

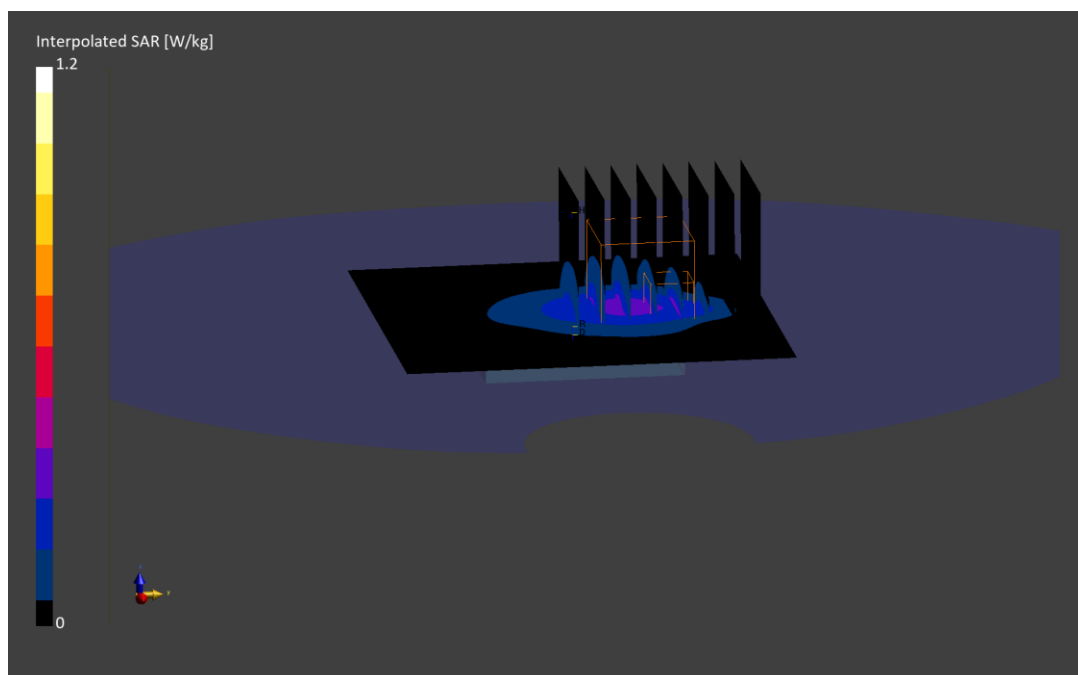

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: MQ0PL

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 793.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.000$ MHz; $\text{cond} = 0.894$ S/m; $\text{perm} = 40.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/05/2025; Ambient Temp: 23.2°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3837; ConvF:(9.29,8.68,8.73); Calibrated: 2024-09-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 14, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below is 14.0 mm

Ratio of SAR at M2 to SAR at M1 = 100.0 %

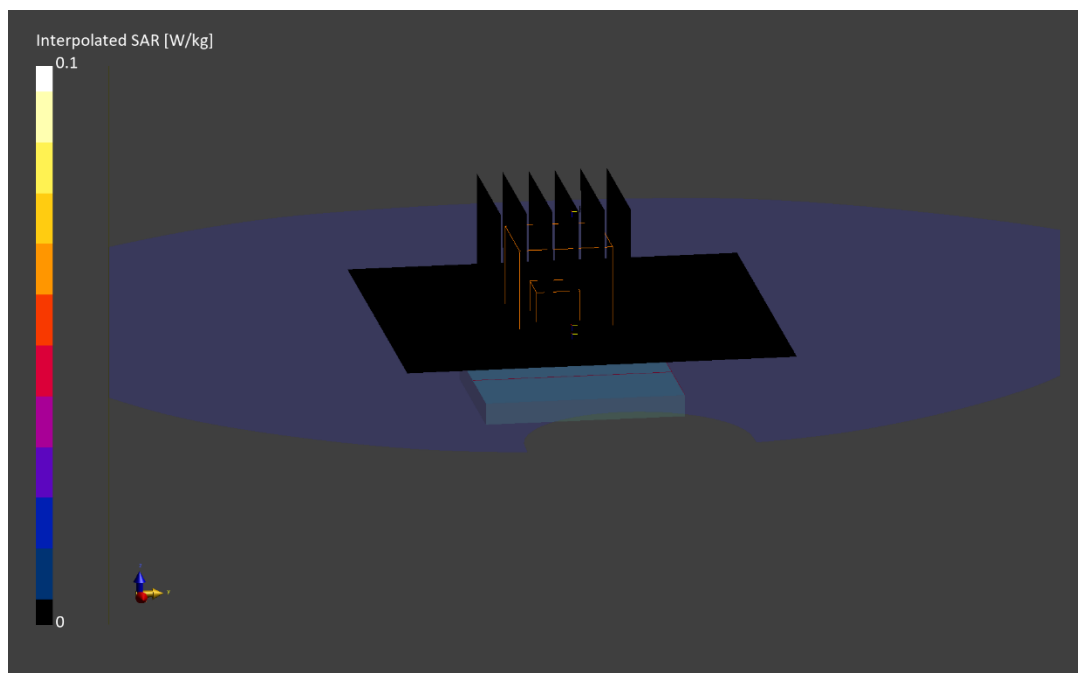

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 6H2HJ

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 793.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.000$ MHz; $\text{cond} = 0.894$ S/m; $\text{perm} = 40.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/05/2025; Ambient Temp: 23.2°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3837; ConvF:(9.29,8.68,8.73); Calibrated: 2024-09-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 14, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.27 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below is 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.9 %

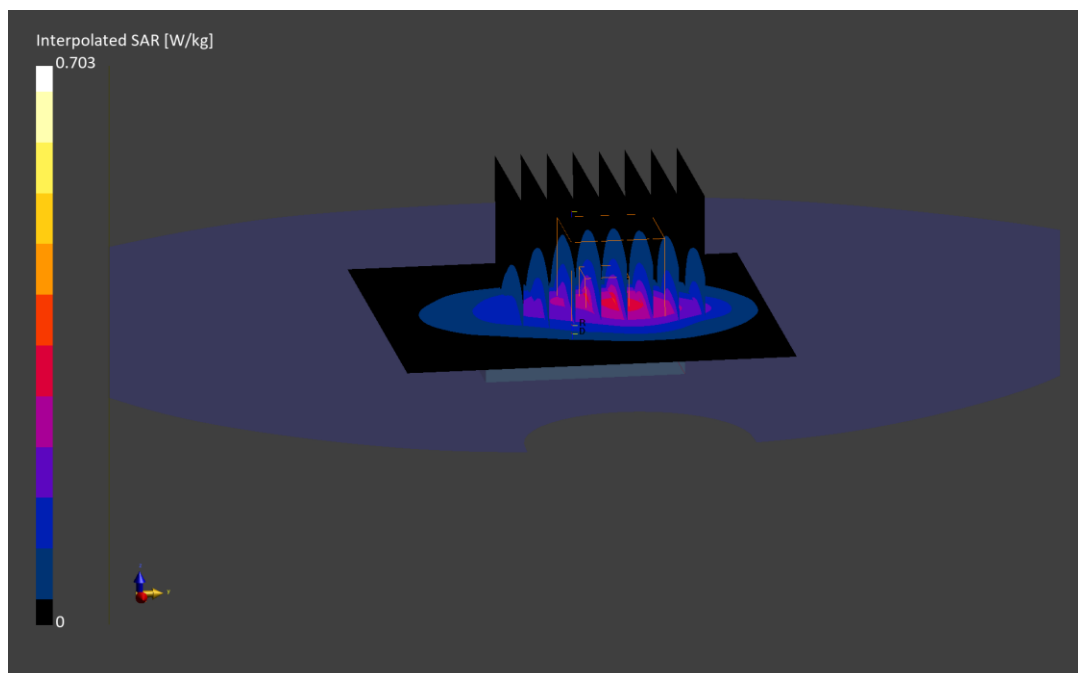

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: D7VHJ

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 831.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.500$ MHz; $\text{cond} = 0.897$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/30/2025; Ambient Temp: 23.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 26, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.005 W/kg

SAR(1 g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below is 22.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.9 %

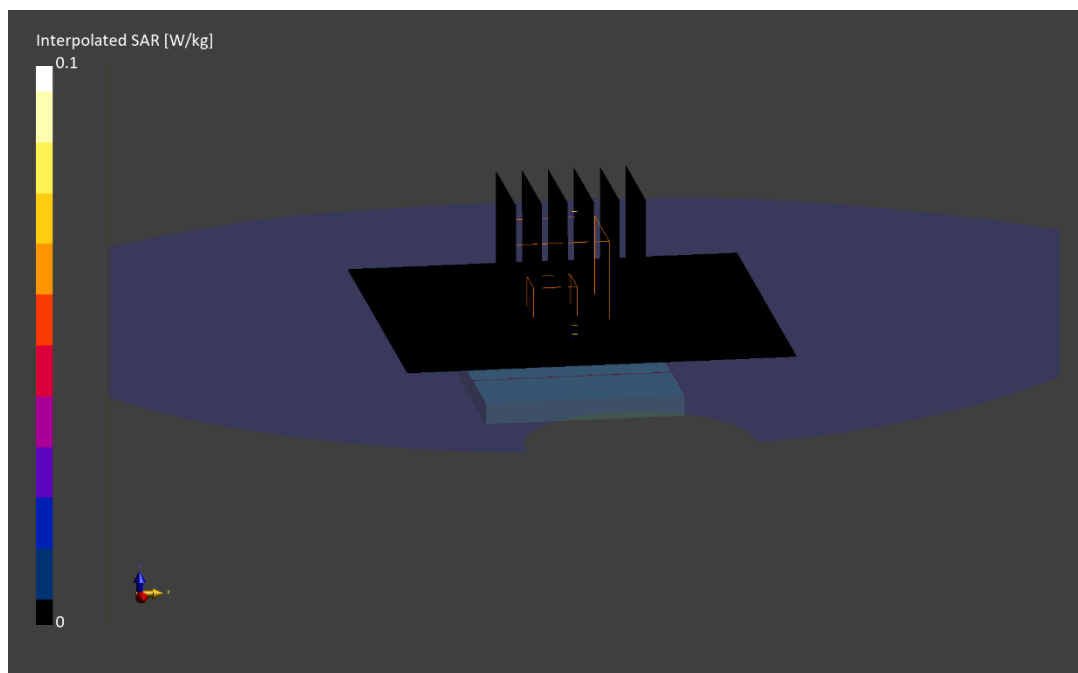

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 6H2HJ

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 844.000 MHz

Medium: 835 Head; Medium parameters used:

$f = 844.000$ MHz; $\text{cond} = 0.888$ S/m; $\text{perm} = 40.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 7/16/2025; Ambient Temp: 21.4°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V5.0; Serial: 1866

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 26, Exp: Extremity| Back Side, Ch. High,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=3.5$ mm, $dy=3.5$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.34 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(10 g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below is 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.3 %

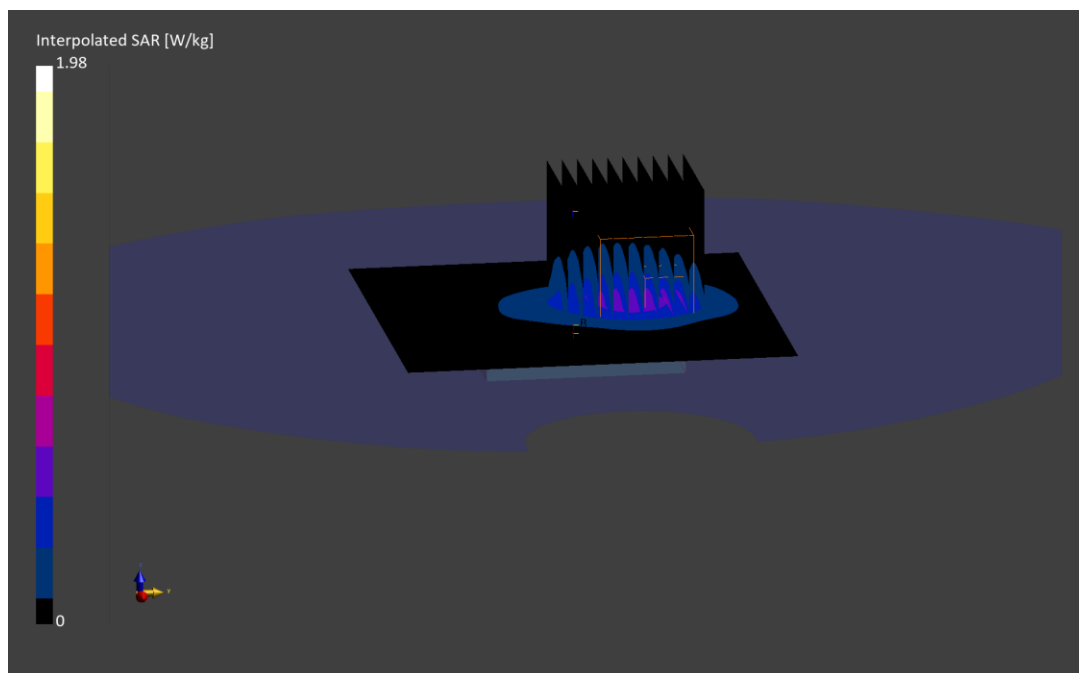

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: N9L62

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 836.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.500$ MHz; $\text{cond} = 0.901$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/30/2025; Ambient Temp: 23.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 5, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset
Titanium, Sport Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.005 W/kg

SAR(1 g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below is 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 90.0 %

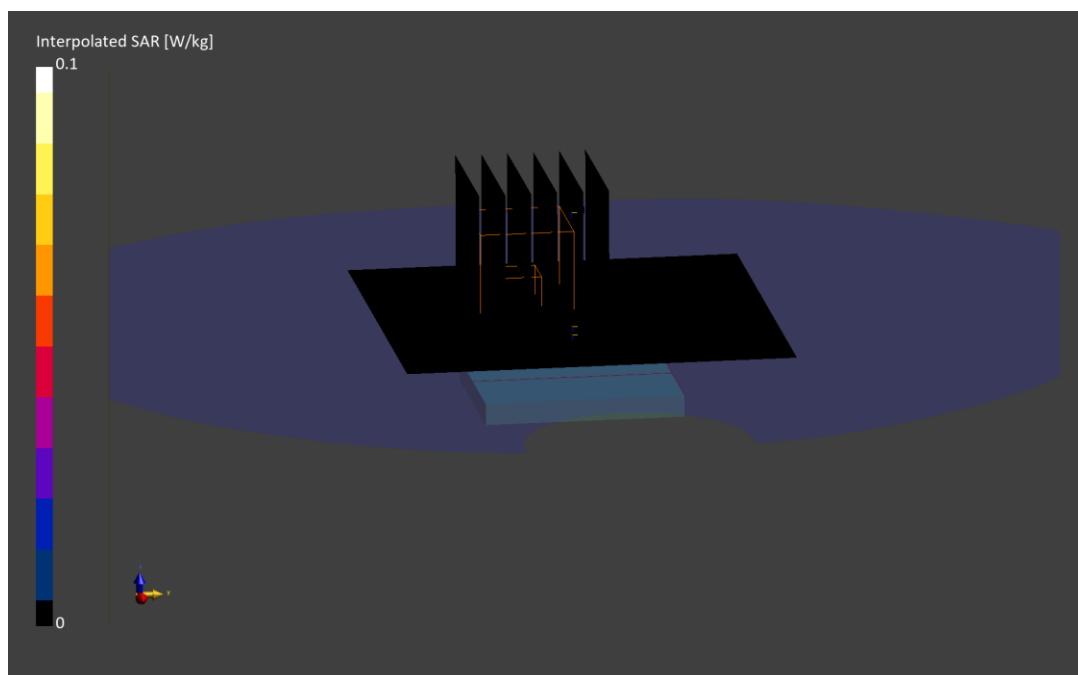

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: Q7RV2

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 836.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.500$ MHz; $\text{cond} = 0.902$ S/m; $\text{perm} = 42.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/24/2025; Ambient Temp: 22.7°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 5, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=3.5$ mm, $dy=3.5$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.25 W/kg; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 68.2 %

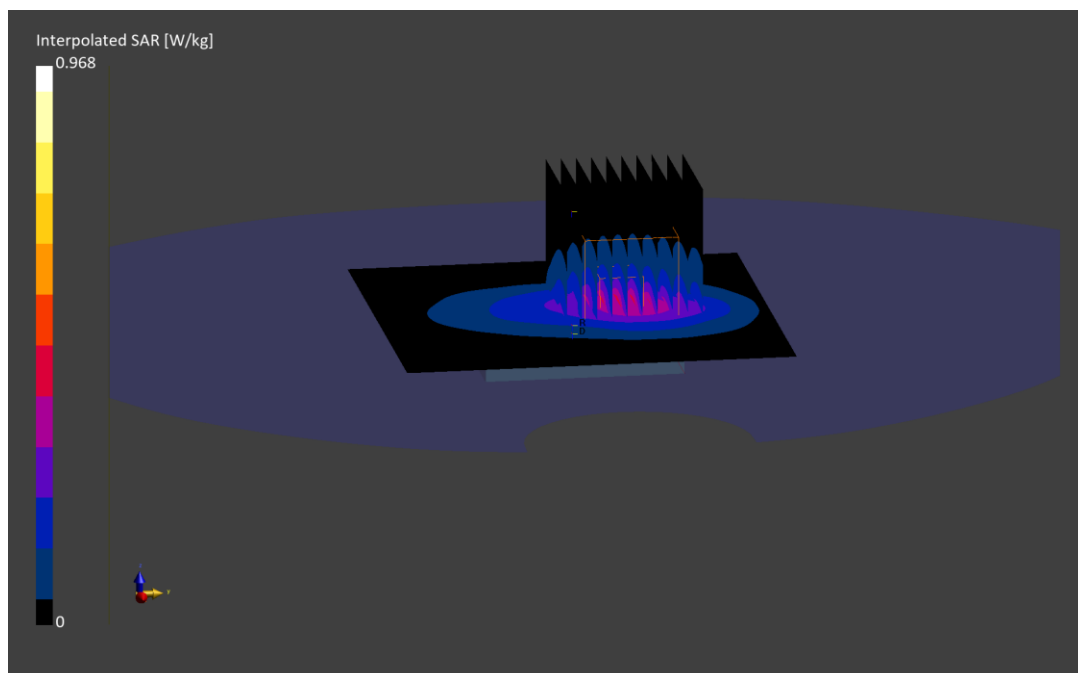

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 3439N

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1720.000 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1720.000$ MHz; $\text{cond} = 1.38$ S/m; $\text{perm} = 38.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/01/2025; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN3746; ConvF:(7.75,7.42,8.04); Calibrated: 2024-10-15

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2024-10-10

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 66, Exp: Head| Front Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.30 W/kg; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below is 21.3 mm

Ratio of SAR at M2 to SAR at M1 = 87.0 %

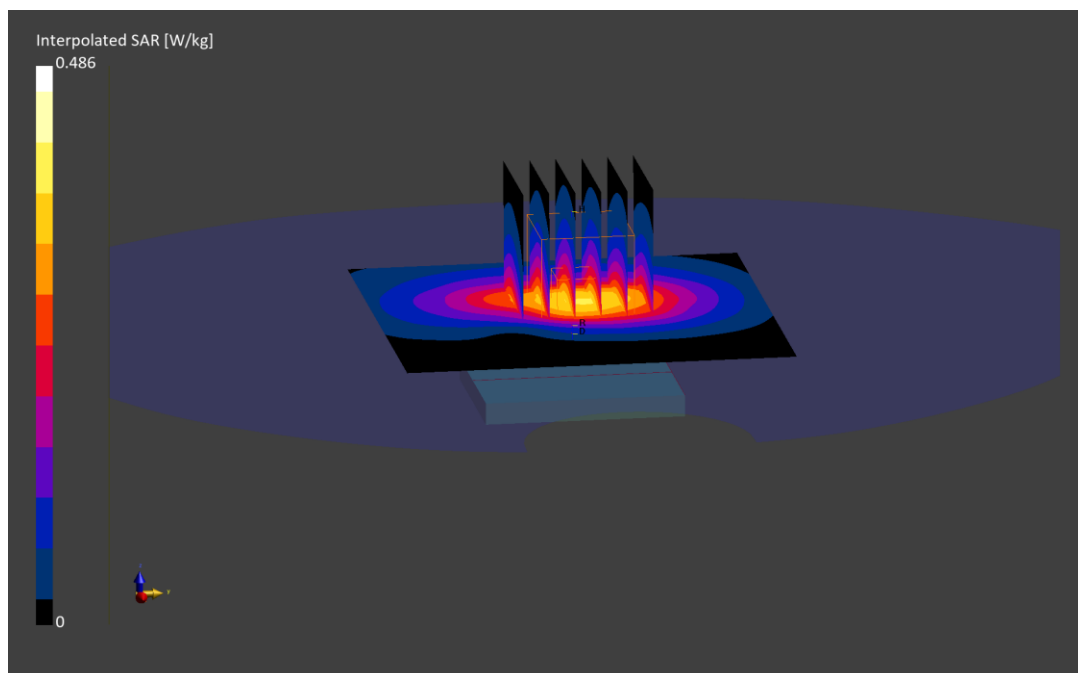

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 57JF2

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1720.000 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1720.000$ MHz; $\text{cond} = 1.35$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/02/2025; Ambient Temp: 19.4°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7427; ConvF:(7.37,7.94,7.96); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 66, Exp: Extremity| Back Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Aluminum, Sport Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.18 W/kg; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below is 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 73.0 %

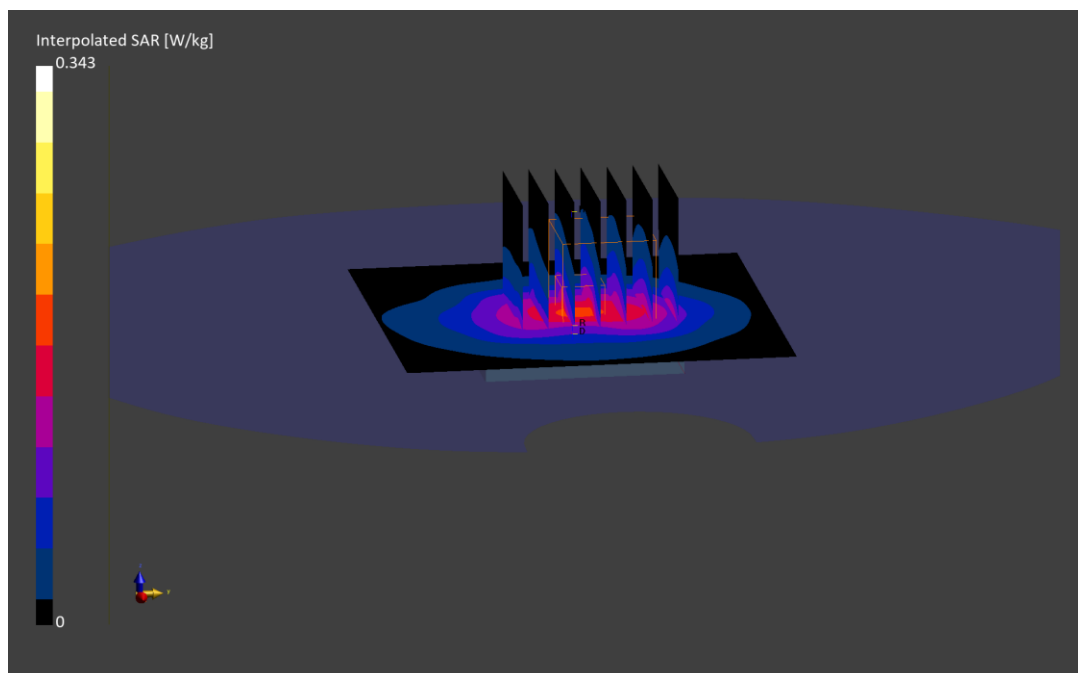

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 3439N

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1860.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1860.000$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 39.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/25/2025; Ambient Temp: 22.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 25, Exp: Head| Front Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.29 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.288 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.4 %

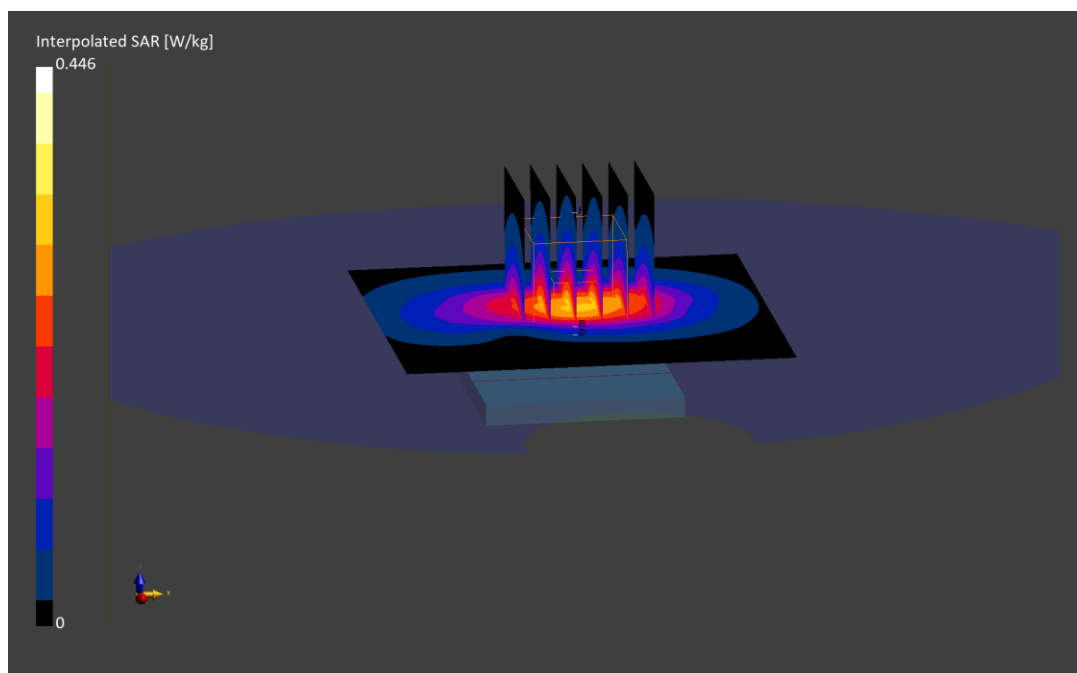

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 74M75

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1860.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1860.000$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 39.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/25/2025; Ambient Temp: 22.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 25, Exp: Extremity| Back Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Reference Value = 0.18 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 93.0 %



ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 5VJF2

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2025; Ambient Temp: 22.1°C; Tissue Temp: 24.4°C

Probe: EX3DV4 - SN3746; ConvF:(6.68,6.4,6.93); Calibrated: 2024-10-15

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2024-10-10

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 7, Exp: Head| Front Side, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.73 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.867 W/kg

Smallest distance from peaks to all points 3 dB below is 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

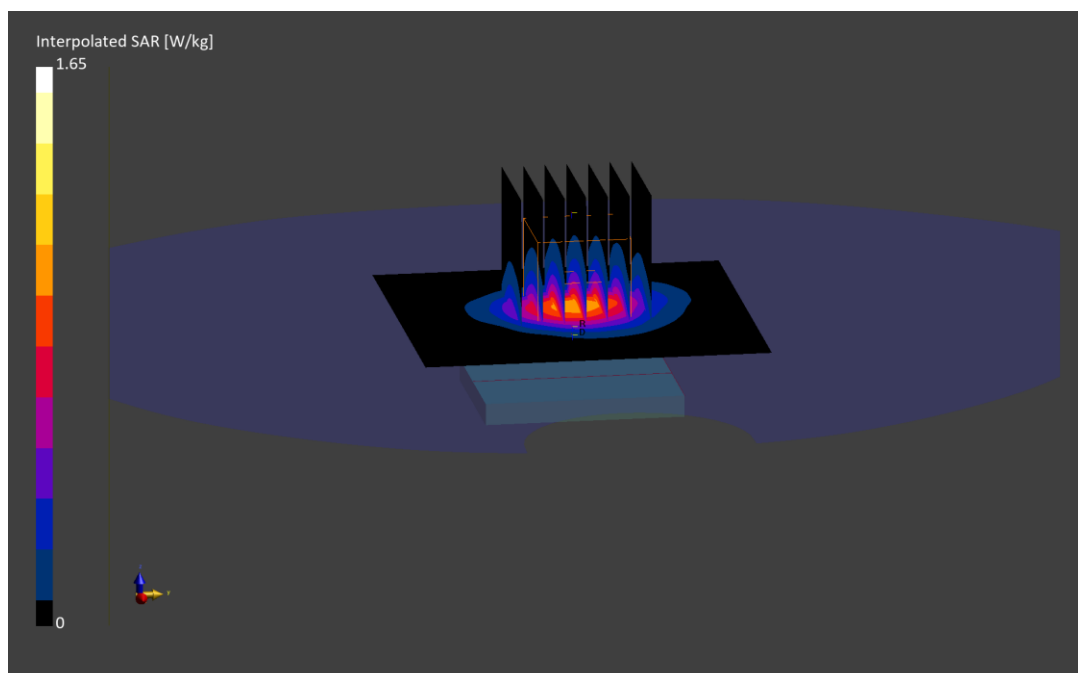

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: QD17Y

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2510.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2510.000$ MHz; $\text{cond} = 1.88$ S/m; $\text{perm} = 38.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/22/2025; Ambient Temp: 23.3°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7357; ConvF:(7.36,6.55,7.78); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 7, Exp: Extremity| Back Side, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset
Titanium, Metal Links Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.90 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(10 g) = 0.436 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

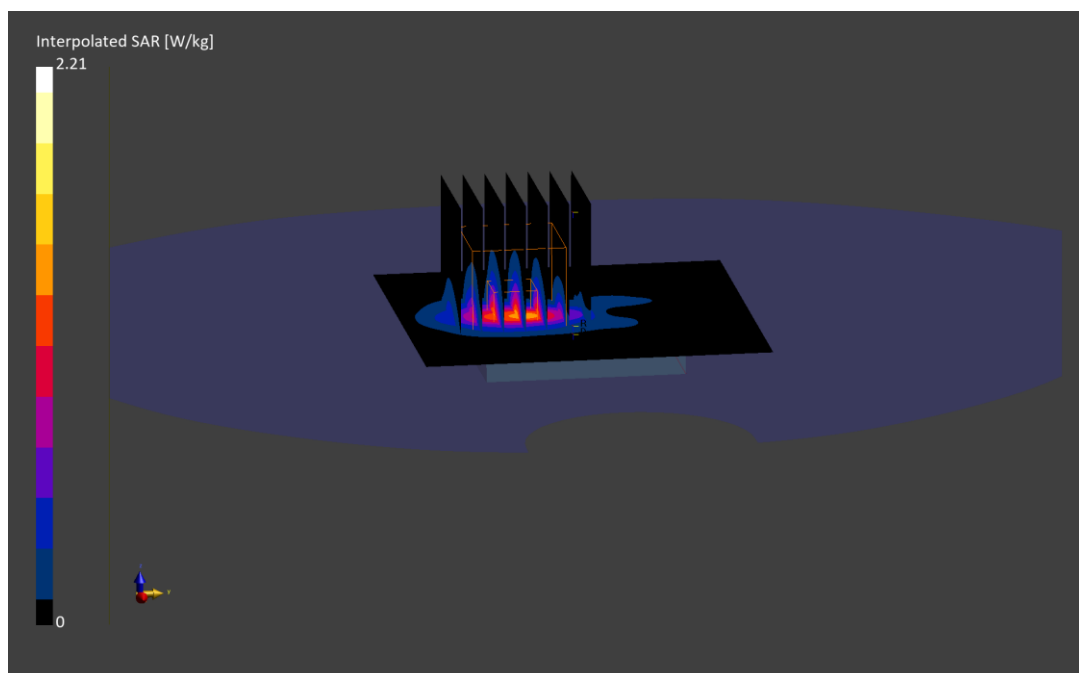

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 3439N

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2506.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2506.000$ MHz; $\text{cond} = 1.88$ S/m; $\text{perm} = 38.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/08/2025; Ambient Temp: 20.7°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7490; ConvF:(7.25,7.34,7.05); Calibrated: 2024-12-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2024-12-04

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 41, Exp: Head| Front Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.74 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.690 W/kg

Smallest distance from peaks to all points 3 dB below is 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

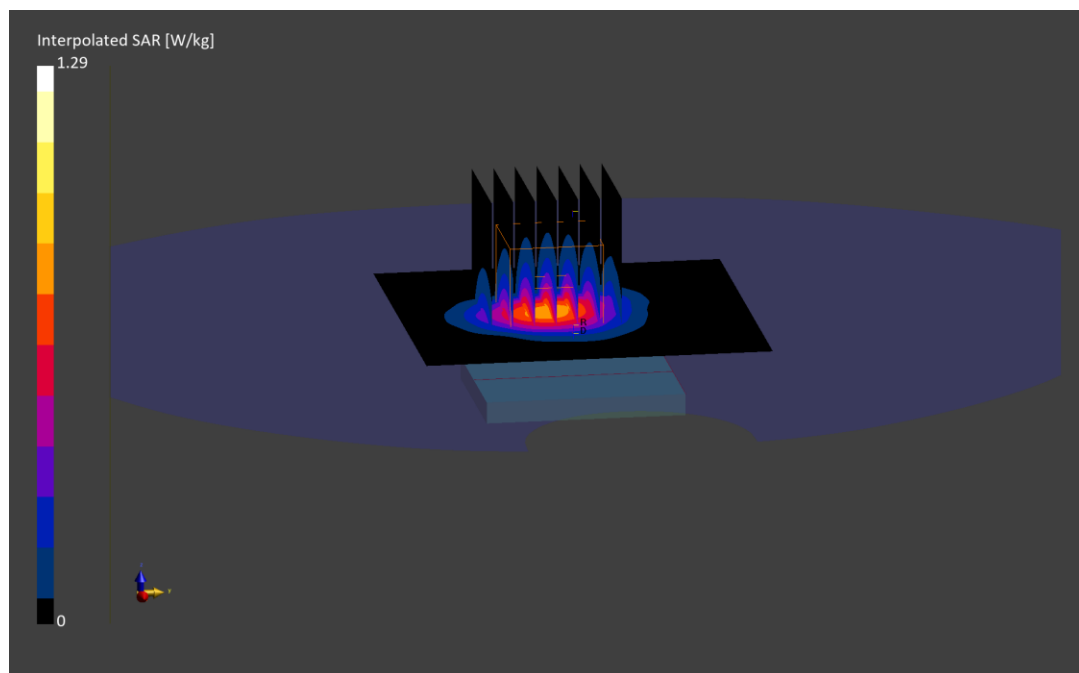

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: D7VHJ

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2549.500 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2549.500$ MHz; $\text{cond} = 1.88$ S/m; $\text{perm} = 37.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/20/2025; Ambient Temp: 20.2°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7490; ConvF:(7.09,7.18,6.9); Calibrated: 2024-12-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2024-12-04

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 41, Exp: Extremity| Back Side, Ch. Low-mid,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset
Titanium, Metal Links Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.80 W/kg; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

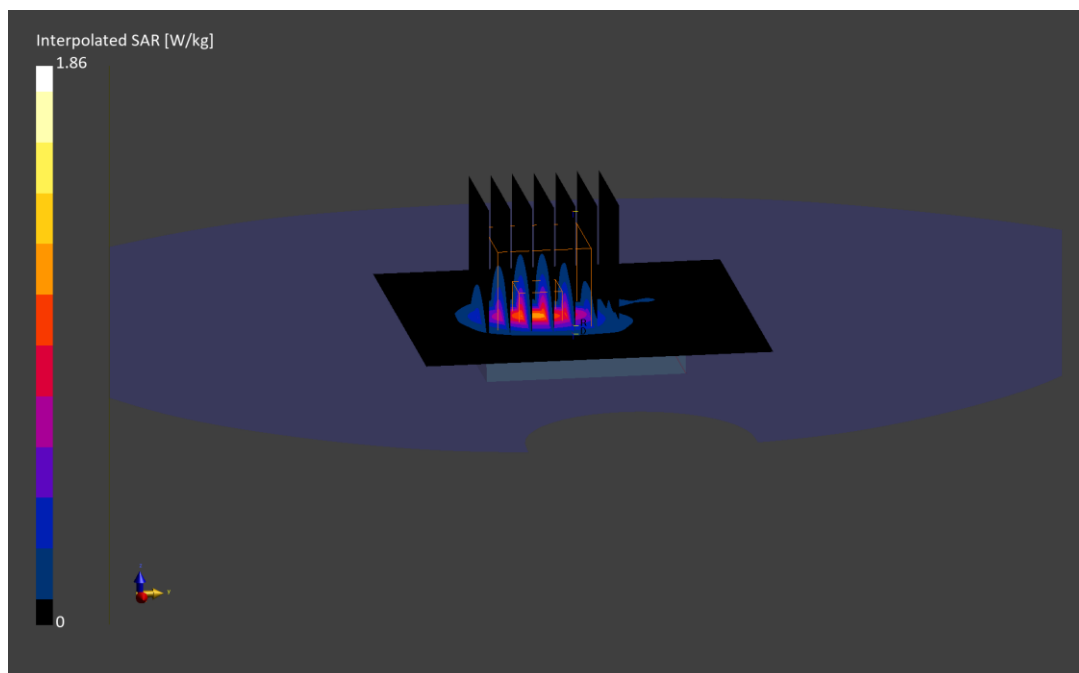

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: JXHXH

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 680.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.500$ MHz; $\text{cond} = 0.846$ S/m; $\text{perm} = 42.1$; $\text{density} = 1000$ kg/ m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/17/2025; Ambient Temp: 23.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n71, Exp: Head| Front Side, Ch. Mid,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Titanium, Sport Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.01 W/kg; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.015 W/kg

SAR(1 g) = 0.007 W/kg

Smallest distance from peaks to all points 3 dB below is 3.6 mm

Ratio of SAR at M2 to SAR at M1 = 42.2 %

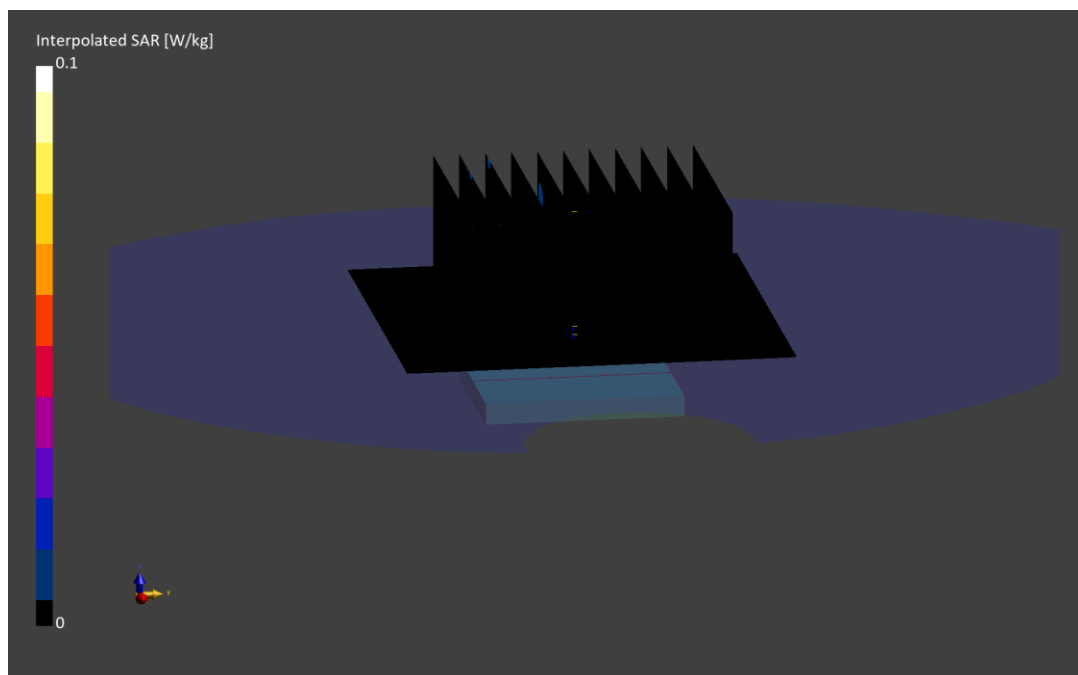

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: PGWQ6

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 680.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.500$ MHz; $\text{cond} = 0.871$ S/m; $\text{perm} = 41.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/09/2025; Ambient Temp: 20.9°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3837; ConvF:(9.29,8.68,8.73); Calibrated: 2024-09-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n71, Exp: Extremity| Back Side, Ch. Mid,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.23 W/kg; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(10 g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below is 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

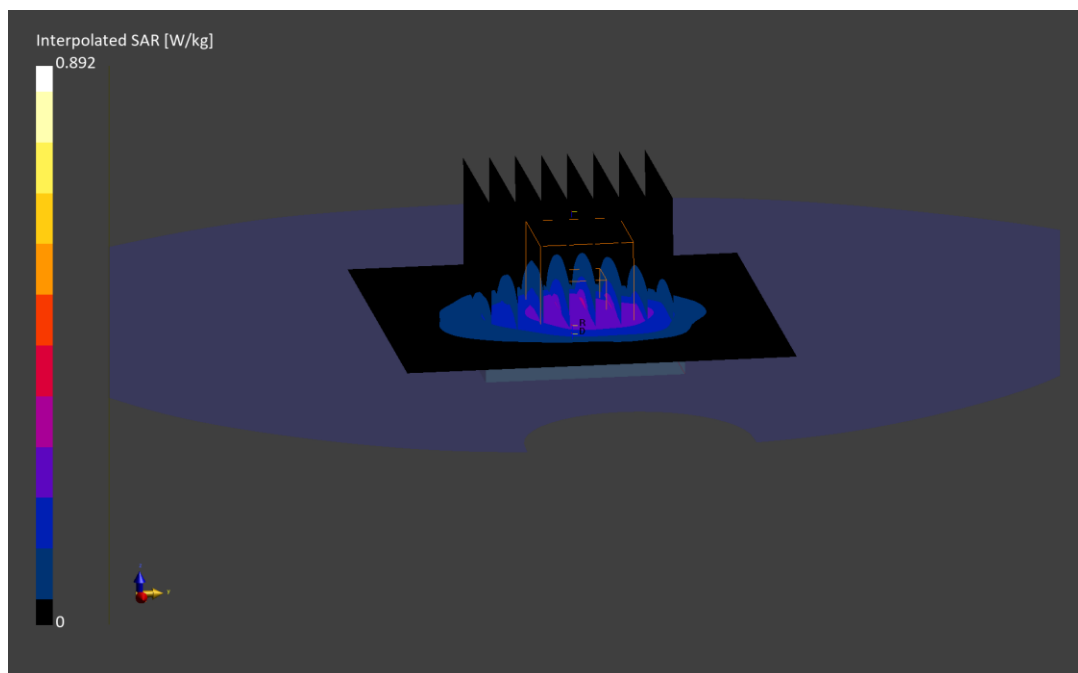

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: JXHXH

Communication System: UID:10929 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500$ MHz; $\text{cond} = 0.857$ S/m; $\text{perm} = 41.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/19/2025; Ambient Temp: 22.4°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n12, Exp: Head| Front Side, Ch. Mid,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.01 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.009 W/kg

Smallest distance from peaks to all points 3 dB below is 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 32.3 %

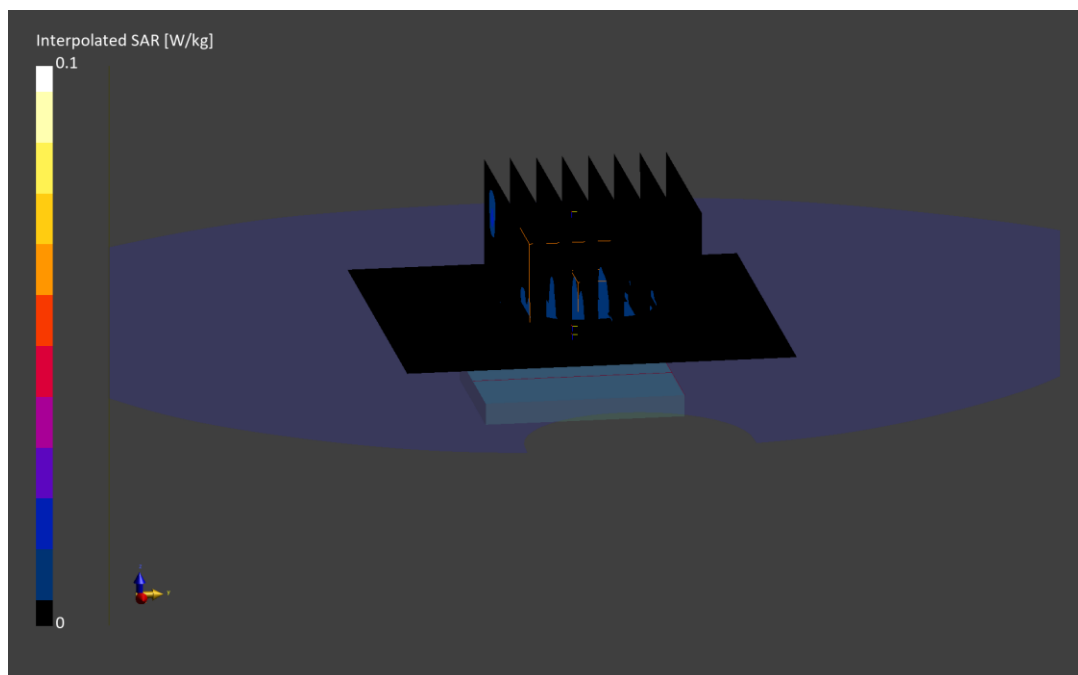

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: VC9MJ

Communication System: UID:10930 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500$ MHz; $\text{cond} = 0.869$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 7/5/2025; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n12, Exp: Extremity| Back Side, Ch. Mid,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.7$ mm, $dy=5.7$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.16 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.8 %

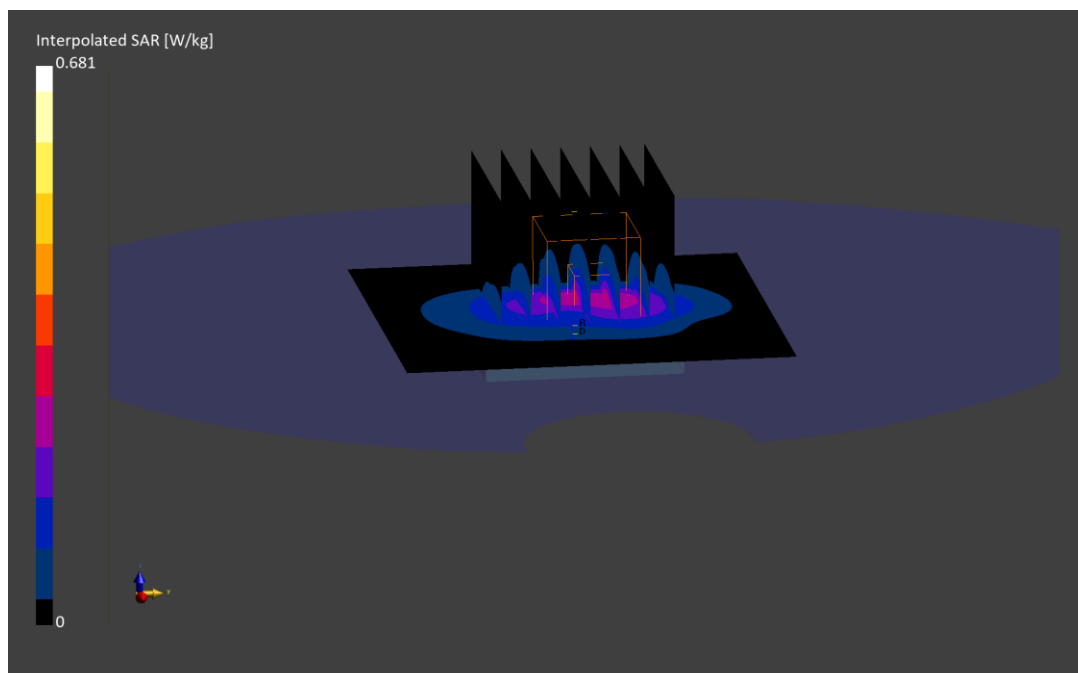

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: JXHXH

Communication System: UID:10929 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 793.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.000$ MHz; $\text{cond} = 0.888$ S/m; $\text{perm} = 40.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/17/2025; Ambient Temp: 20.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3837; ConvF:(9.29,8.68,8.73); Calibrated: 2024-09-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n14, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset
Titanium, Sport Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below is 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 95.5 %

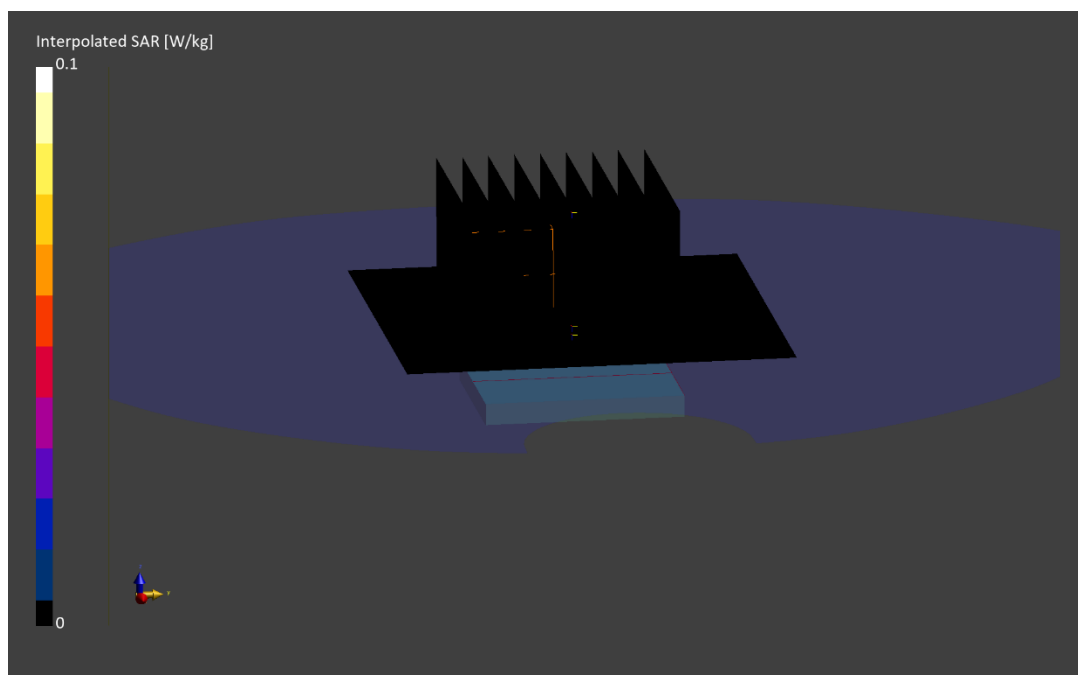

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: QHR7F

Communication System: UID:10929 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 793.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.000$ MHz; $\text{cond} = 0.911$ S/m; $\text{perm} = 40.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/03/2025; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n14, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.20 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below is 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

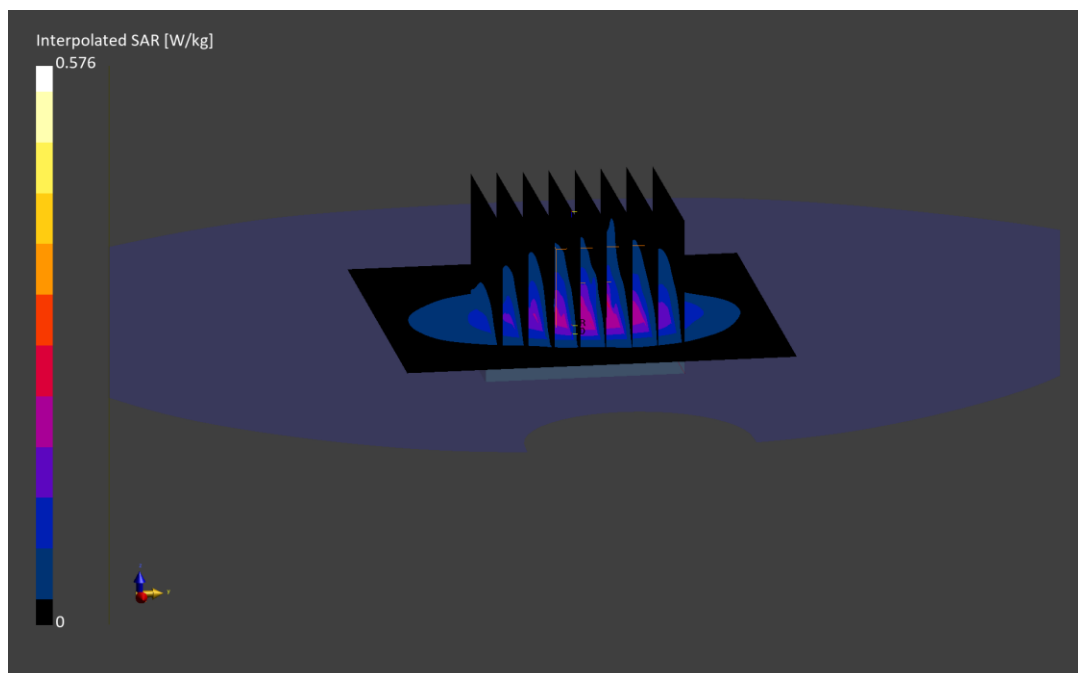

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 0Y743

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 831.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.500$ MHz; $\text{cond} = 0.877$ S/m; $\text{perm} = 39.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2025; Ambient Temp: 21.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V5.0; Serial: 1866

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n26, Exp: Head| Front Side, Ch. 166300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 53 RB Offset
Aluminum, Sport Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.004 W/kg

SAR(1 g) = 0.002 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 96.5 %

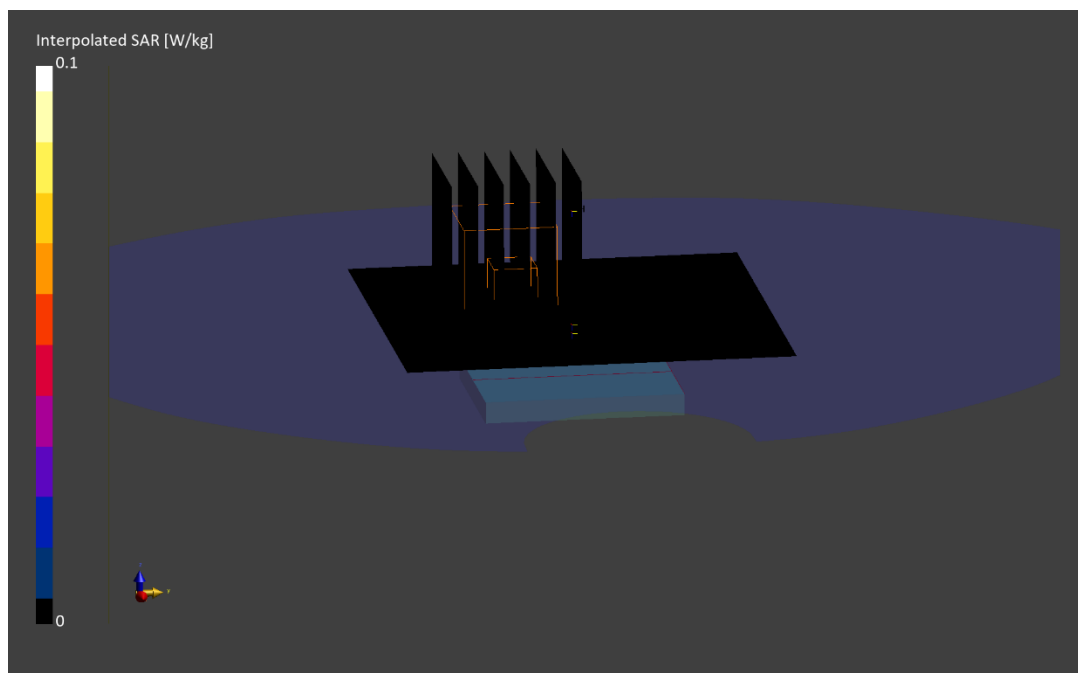

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: VC9MJ

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 831.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.500$ MHz; $\text{cond} = 0.897$ S/m; $\text{perm} = 42.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/24/2025; Ambient Temp: 22.7°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n26, Exp: Extremity| Back Side, Ch. 166300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.36 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(10 g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 70.3 %

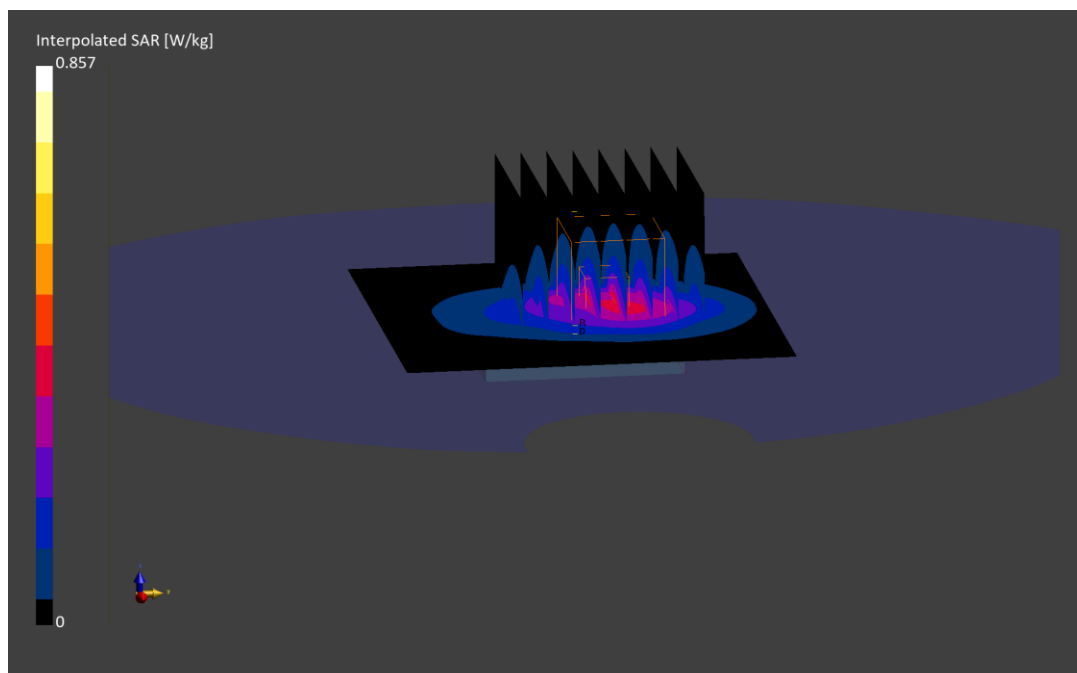

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 0Y743

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 836.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.500$ MHz; $\text{cond} = 0.914$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 7/6/2025; Ambient Temp: 20.7°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V5.0; Serial: 1866

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n5, Exp: Head| Front Side, Ch. Mid,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Aluminum, Sport Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below is 16.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

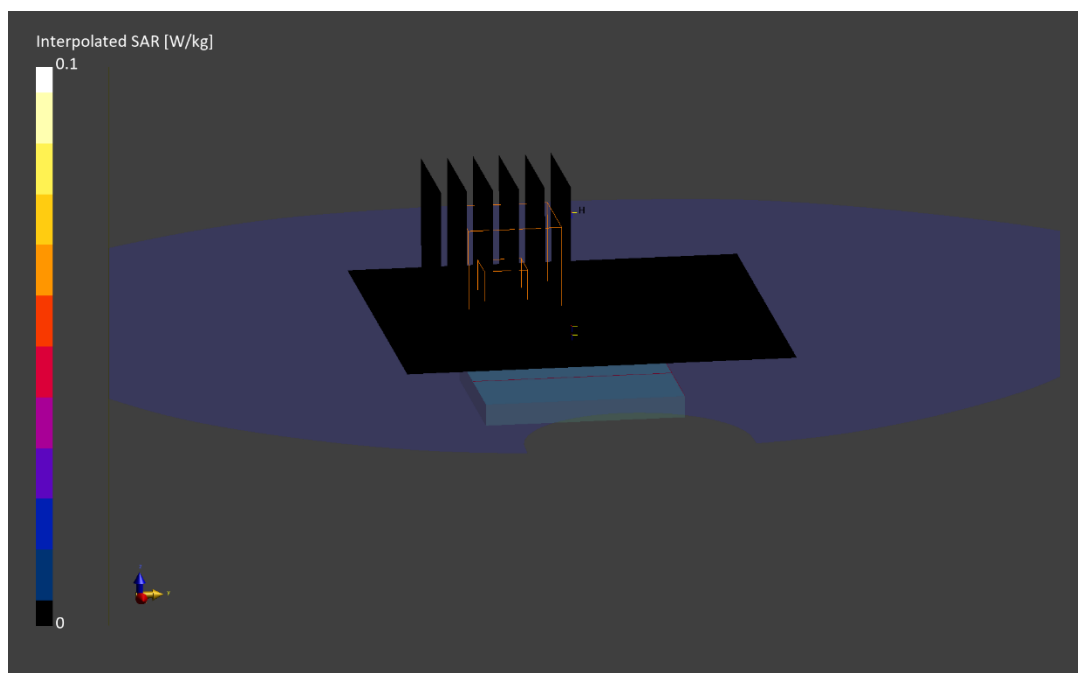

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 6H2HJ

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 836.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.500$ MHz; $\text{cond} = 0.881$ S/m; $\text{perm} = 39.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/03/2025; Ambient Temp: 21.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7427; ConvF:(8.46,9.11,9.12); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V5.0; Serial: 1866

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n5, Exp: Extremity| Back Side, Ch. Mid,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.9$ mm, $dy=5.9$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.21 W/kg; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below is 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 62.0 %

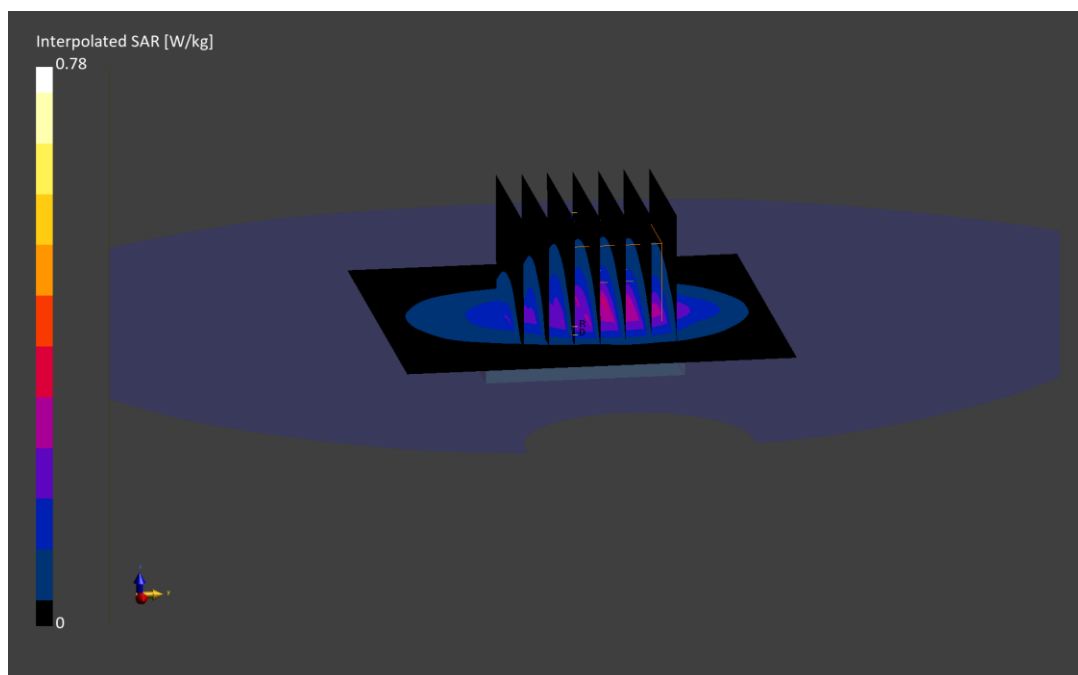

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 3439N

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1745.000 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1745.000$ MHz; $\text{cond} = 1.41$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/01/2025; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN3746; ConvF:(7.75,7.42,8.04); Calibrated: 2024-10-15

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2024-10-10

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n66, Exp: Head| Front Side, Ch. Mid,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.29 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.319 W/kg

Smallest distance from peaks to all points 3 dB below is 19.6 mm

Ratio of SAR at M2 to SAR at M1 = 87.8 %

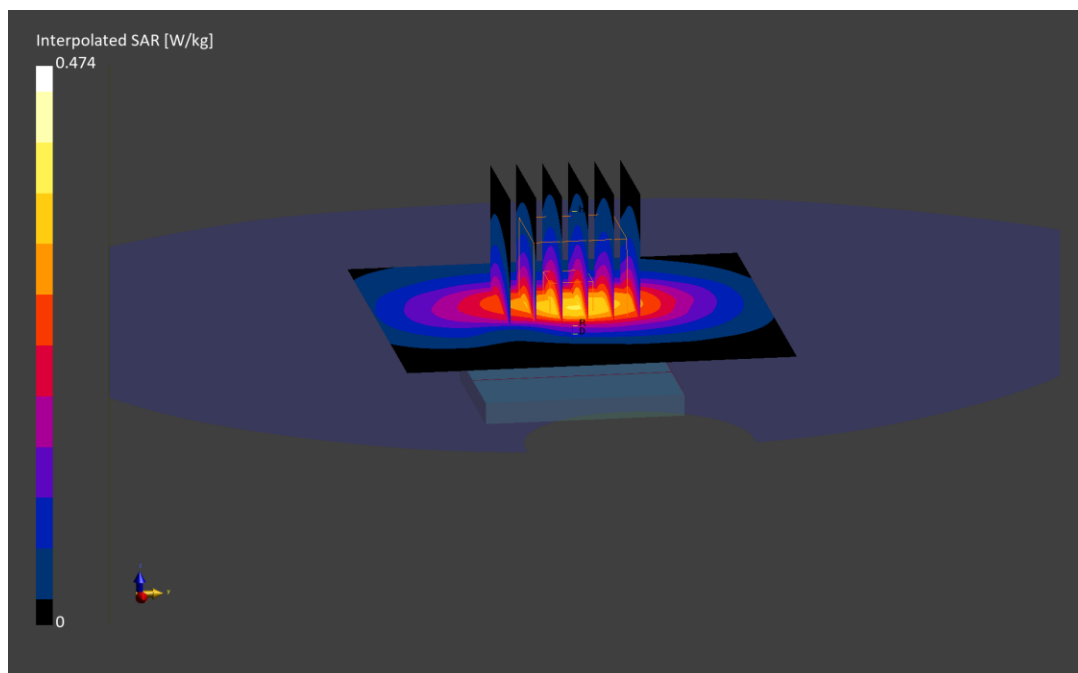

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: H7X01

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1745.000 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1745.000$ MHz; $\text{cond} = 1.41$ S/m; $\text{perm} = 39.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/25/2025; Ambient Temp: 23.2°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7427; ConvF:(7.37,7.94,7.96); Calibrated: 2025-02-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2024-10-10

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n66, Exp: Extremity| Back Side, Ch. Mid,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below is 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

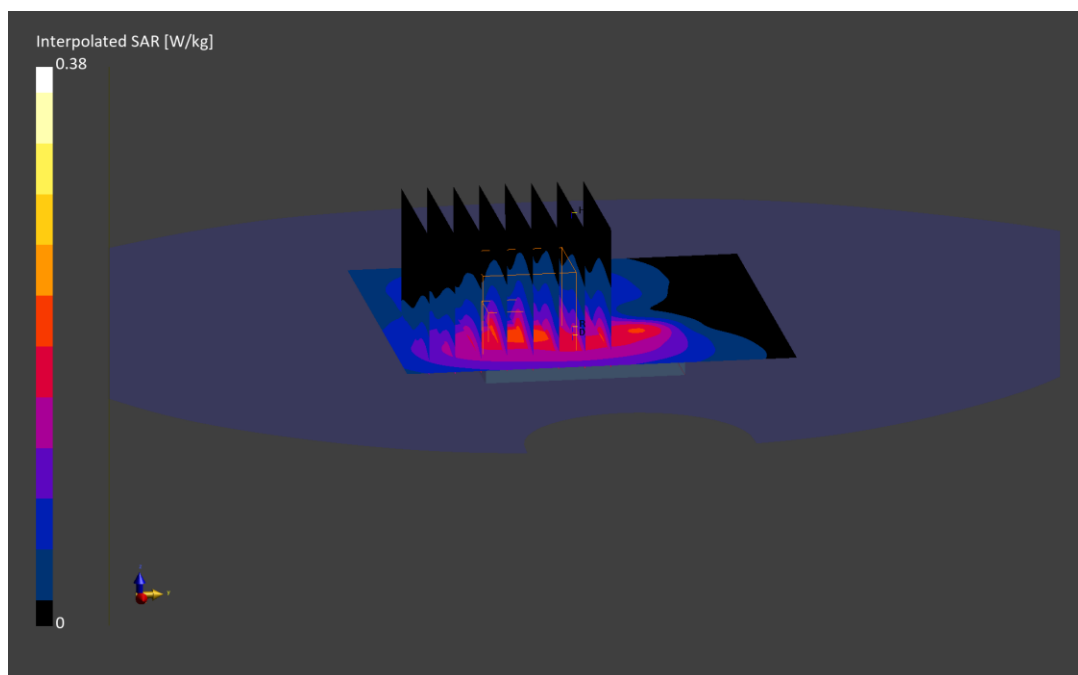

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: QHR7F

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1860.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1860.000$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 39.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/25/2025; Ambient Temp: 22.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n25, Exp: Head| Front Side, Ch. Low,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.30 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below is 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.8 %

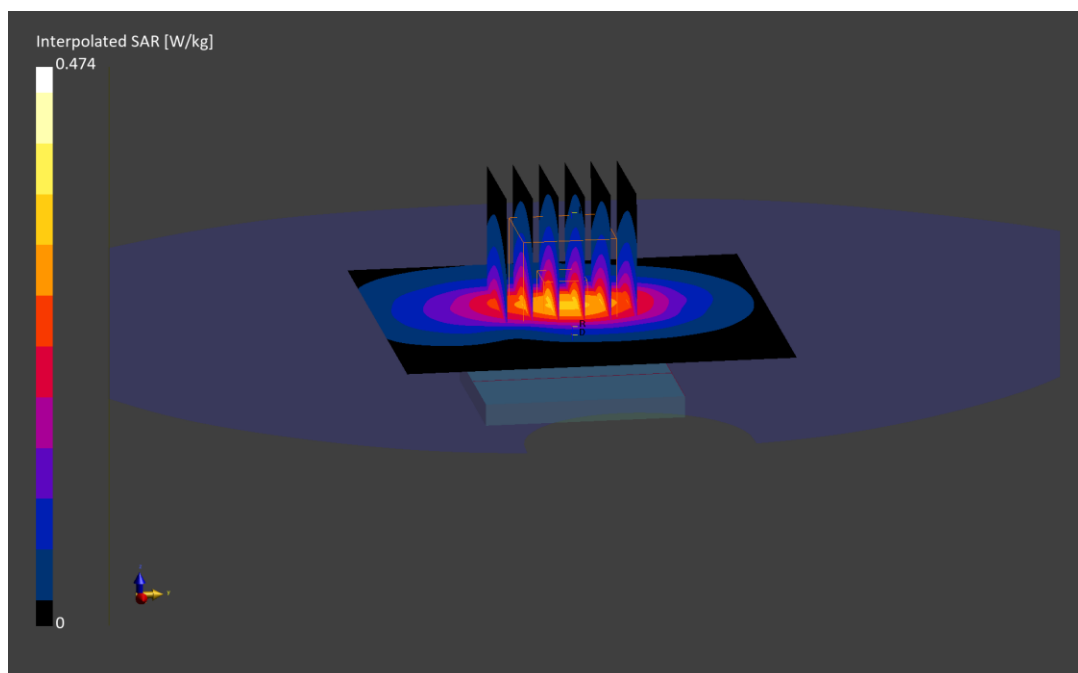

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: R0Q3X

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1860.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1860.000$ MHz; $\text{cond} = 1.40$ S/m; $\text{perm} = 40.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/23/2025; Ambient Temp: 21.2°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n25, Exp: Extremity| Back Side, Ch. Low,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.20 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 87.5 %

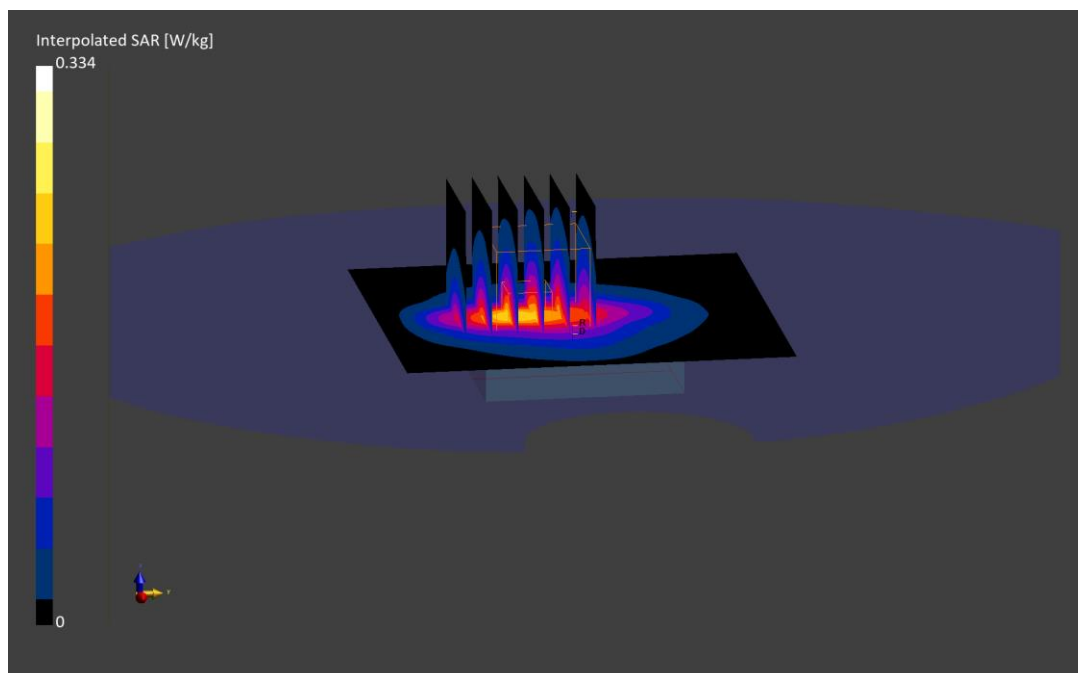

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 7LP03

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2510.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2510.000$ MHz; $\text{cond} = 1.90$ S/m; $\text{perm} = 38.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/23/2025; Ambient Temp: 22.5°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3746; ConvF:(6.85,6.56,7.1); Calibrated: 2024-10-15

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2024-10-10

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n7, Exp: Head| Front Side, Ch. Low,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.74 W/kg; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.871 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

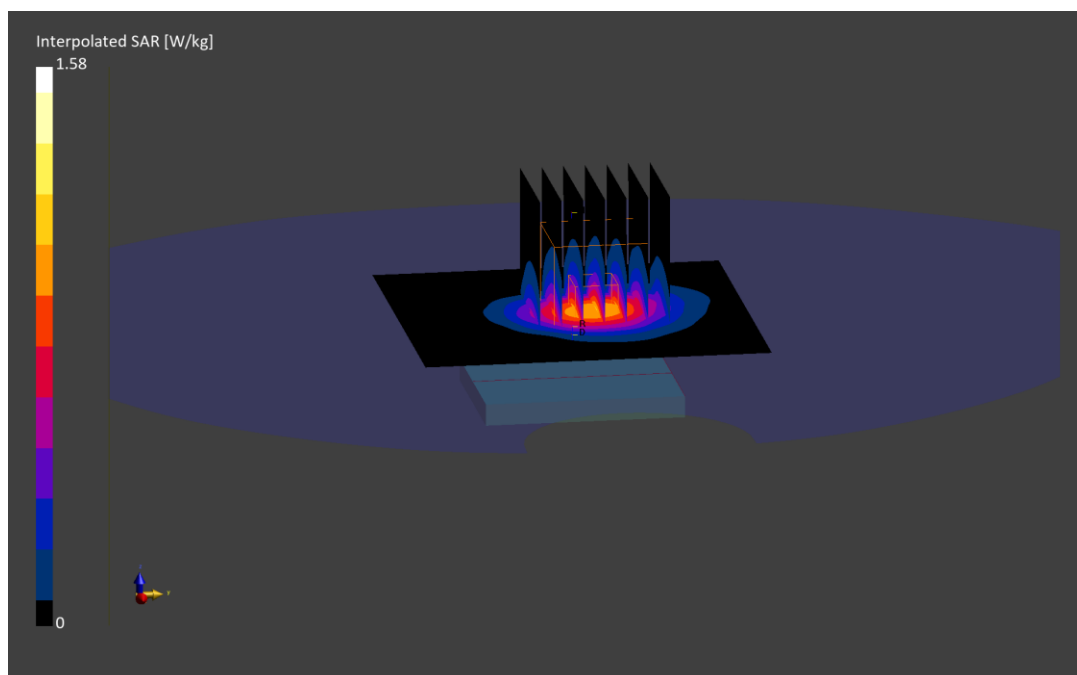

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: Y2534

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2510.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2510.000$ MHz; $\text{cond} = 1.88$ S/m; $\text{perm} = 38.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/22/2025; Ambient Temp: 23.3°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7357; ConvF:(7.36,6.55,7.78); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n7, Exp: Extremity| Back Side, Ch. Low,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset
Titanium, Metal Loop Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.21 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(10 g) = 0.530 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.3 %

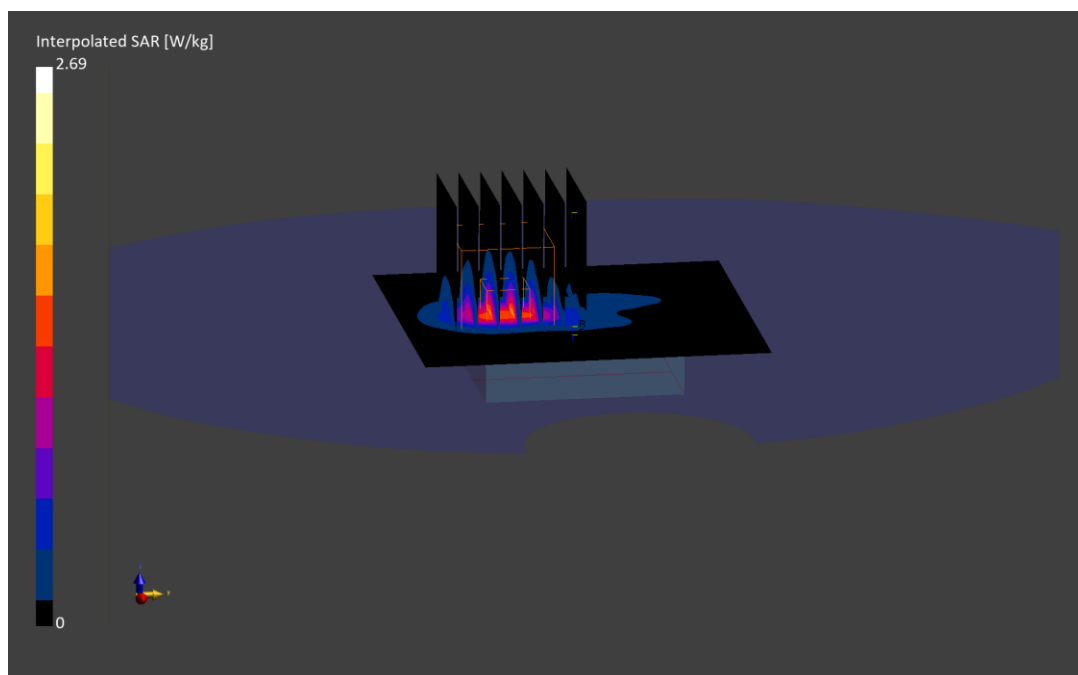

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 7PL03

Communication System: UID:10910 - AAC, 5G NR FR1 TDD; MAIA: Y; Frequency: 2549.490 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2549.490$ MHz; $\text{cond} = 1.89$ S/m; $\text{perm} = 37.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 7/6/2025; Ambient Temp: 20.7°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7490; ConvF:(7.09,7.18,6.9); Calibrated: 2024-12-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2024-12-04

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n41, Exp: Head| Front Side, Ch. Mid Low,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 25 RB, 13 RB Offset
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.04 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.967 W/kg

Smallest distance from peaks to all points 3 dB below is 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

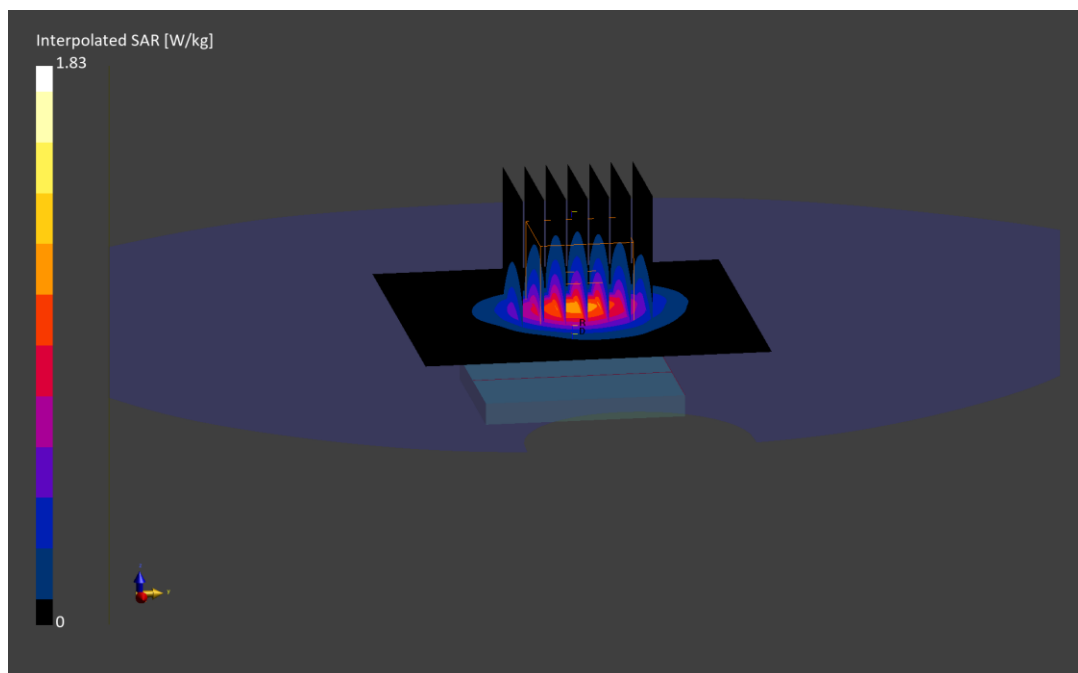

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: PQDPF

Communication System: UID:10900 - AAC, 5G NR FR1 TDD; MAIA: Y; Frequency: 2506.020 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2506.020$ MHz; $\text{cond} = 1.87$ S/m; $\text{perm} = 38.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/22/2025; Ambient Temp: 23.3°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7357; ConvF:(7.36,6.55,7.78); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n41, Exp: Extremity| Back Side, Ch. 501204,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset
Aluminum, Metal Links Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.70 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(10 g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.0 %

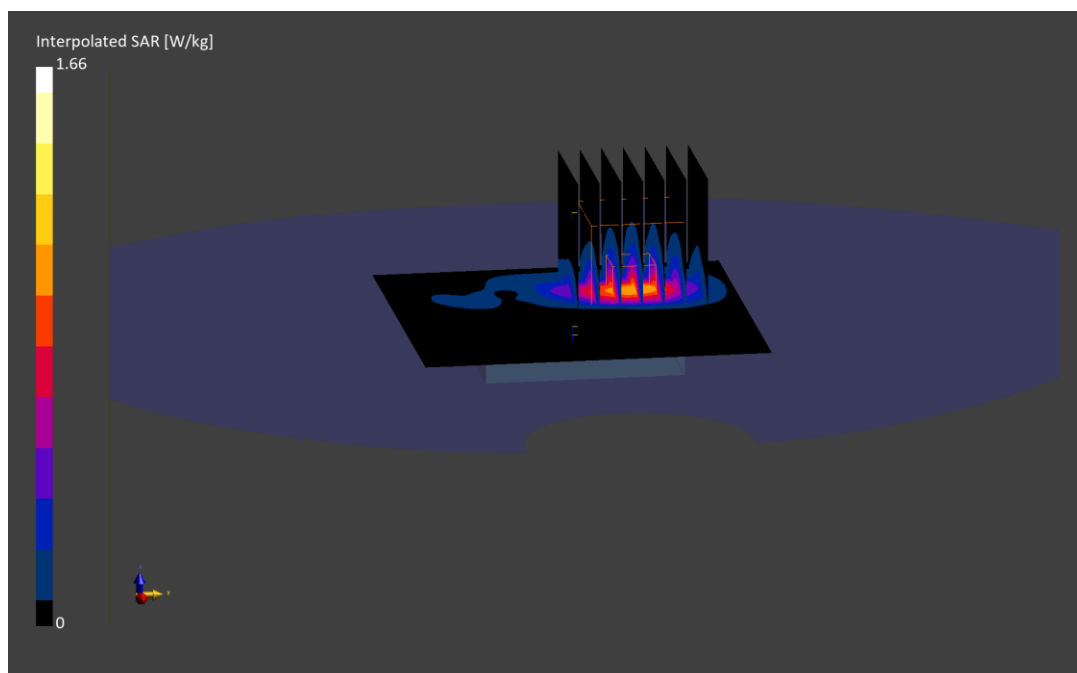

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: NWD2D

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2412.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2412.000$ MHz; $\text{cond} = 1.80$ S/m; $\text{perm} = 38.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2025; Ambient Temp: 21.5°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, 22 MHz Bandwidth, Exp: Head| Front Side, Ch. 1,
1Mbps
Titanium, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.21 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below is 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

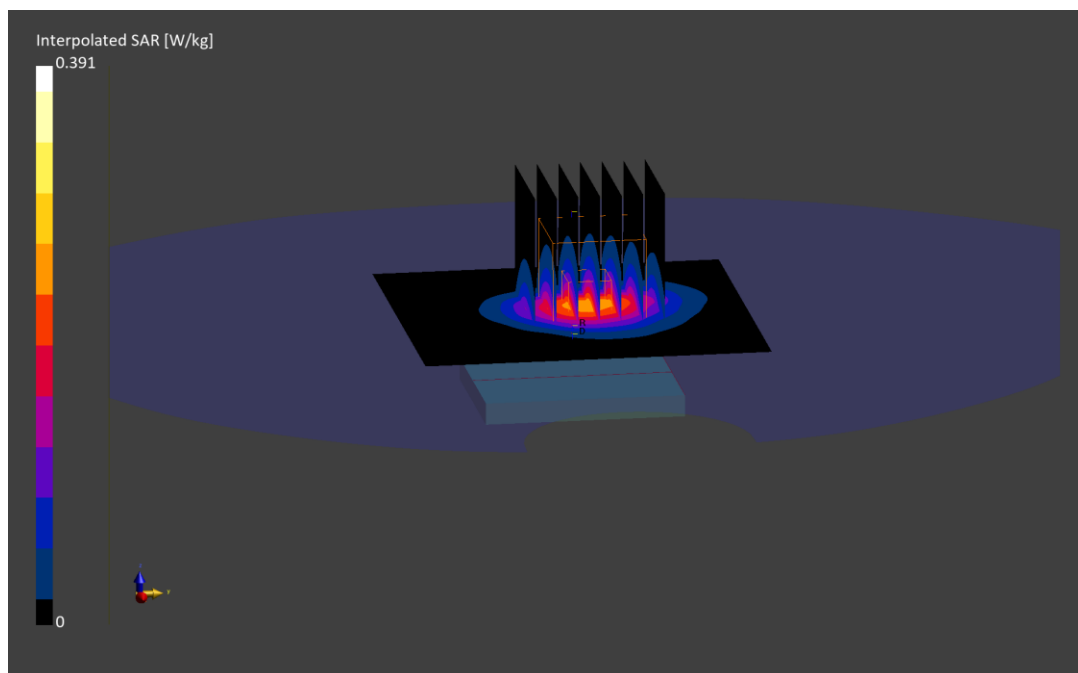

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: NWD2D

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2437.000$ MHz; $\text{cond} = 1.82$ S/m; $\text{perm} = 38.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/10/2025; Ambient Temp: 22.0°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, 22 MHz Bandwidth, Exp: Extremity| Back Side, Ch. 1,
1Mbps**

Titanium, Metal Loop Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.17 W/kg; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(10 g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

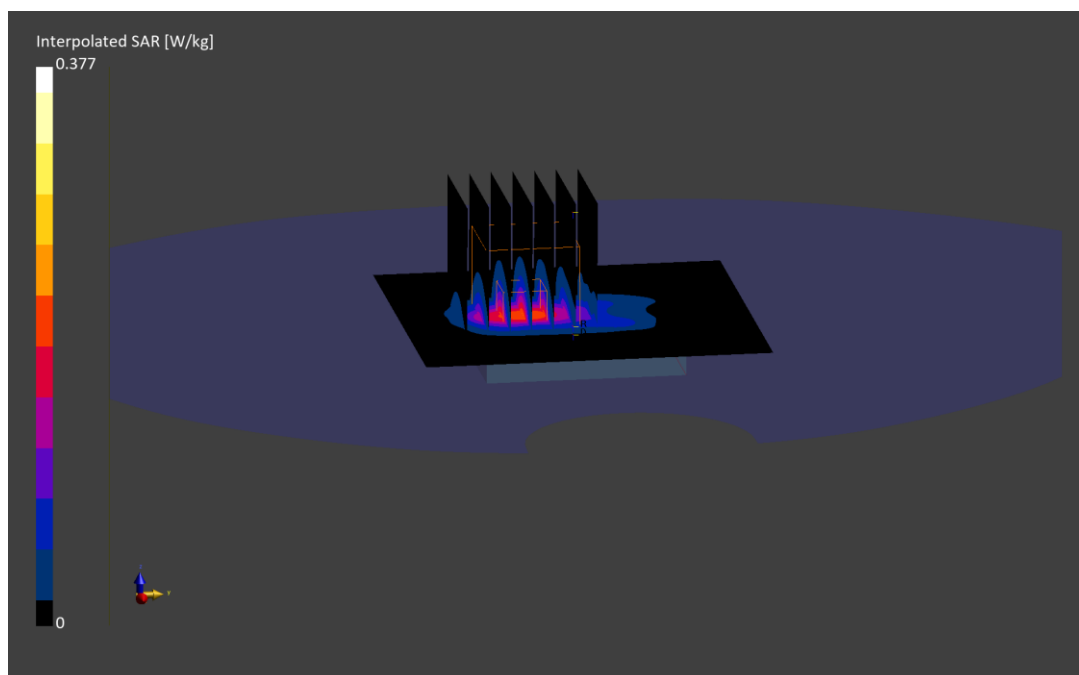

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 5VJF2

Communication System: UID:10317 - AAE, WLAN; MAIA: Y; Frequency: 5600.000 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5600.000$ MHz; $\text{cond} = 5.09$ S/m; $\text{perm} = 34.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2025; Ambient Temp: 22.3°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7782; ConvF:(5.12,4.48,4.38); Calibrated: 2024-09-12

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1646; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 5 GHz WIFI/ IEEE 802.11a, 20 MHz Bandwidth, U-NII-2C, Exp: Head| Front Side,
Ch. 120, 6.0 Mbps
Aluminum, Metal Loop Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.16 W/kg; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below is 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.7 %

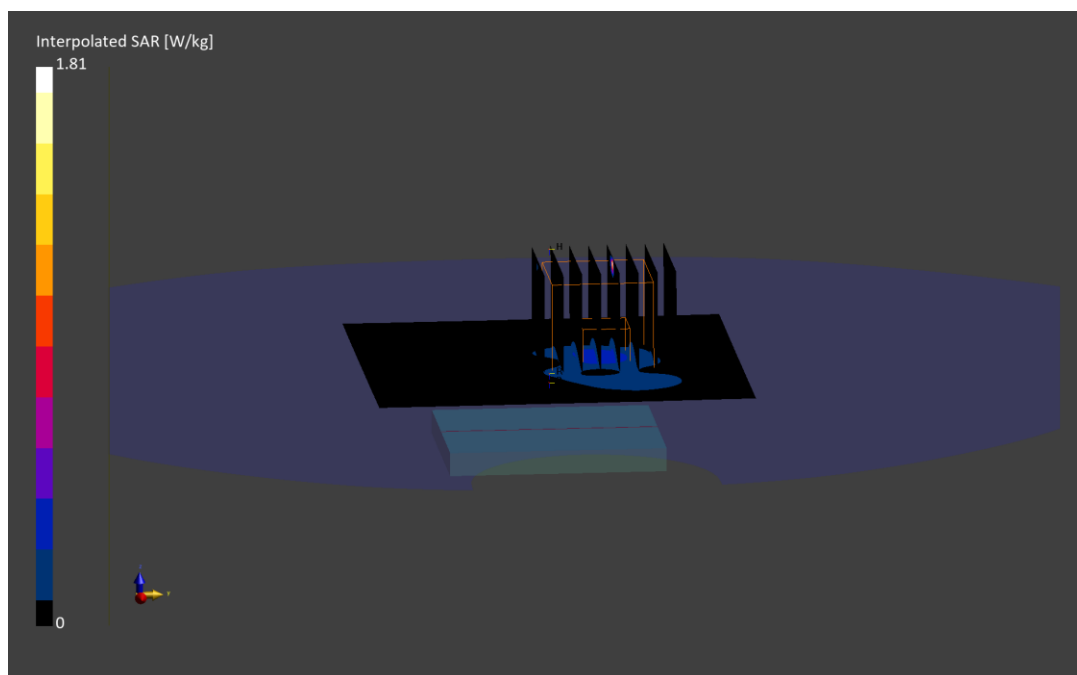

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 5VJF2

Communication System: UID:10317 - AAE, WLAN; MAIA: Y; Frequency: 5825.000 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5825.000$ MHz; $\text{cond} = 5.37$ S/m; $\text{perm} = 33.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/19/2025; Ambient Temp: 22.3°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7782; ConvF:(5.28,4.62,4.52); Calibrated: 2024-09-12

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1646; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 5 GHz WIFI/ IEEE 802.11a, 20 MHz Bandwidth, U-NII-3, Exp: Extremity| Back Side,
Ch. 165, 6.0 Mbps
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.05 W/kg; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.547 W/kg

SAR(10 g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below is 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.9 %

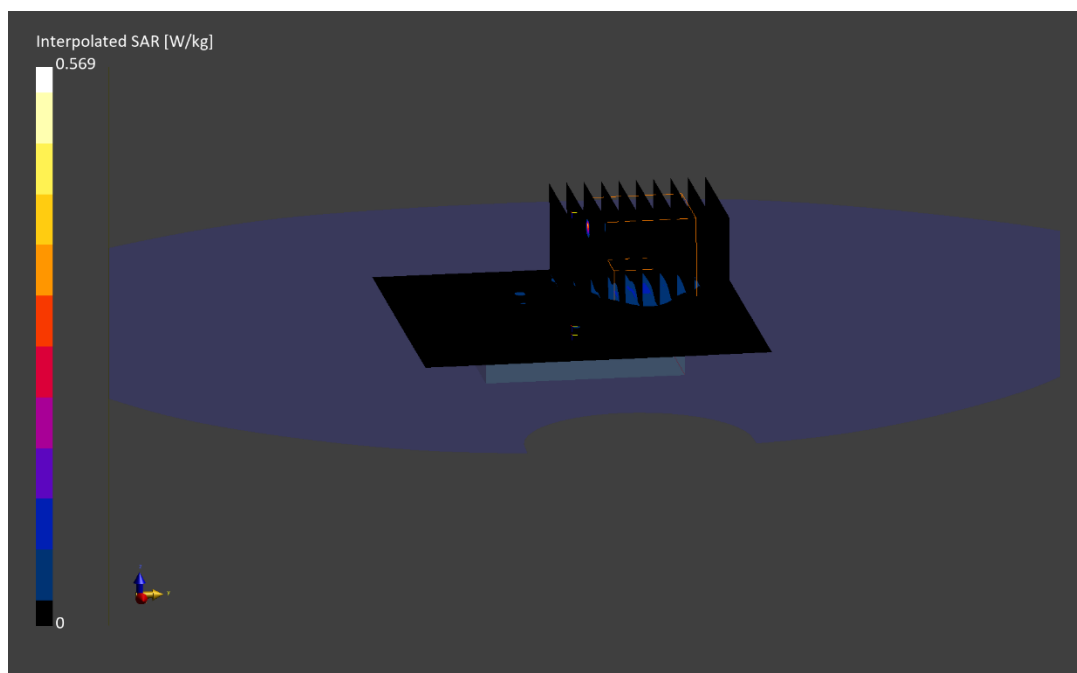

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: NWD2D

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2402.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2402.000$ MHz; $\text{cond} = 1.79$ S/m; $\text{perm} = 38.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2025; Ambient Temp: 21.5°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 2.4 GHz Bluetooth, Exp: Head| Front Side, Ch. 0, 1 Mbps
Titanium, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.14 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below is 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

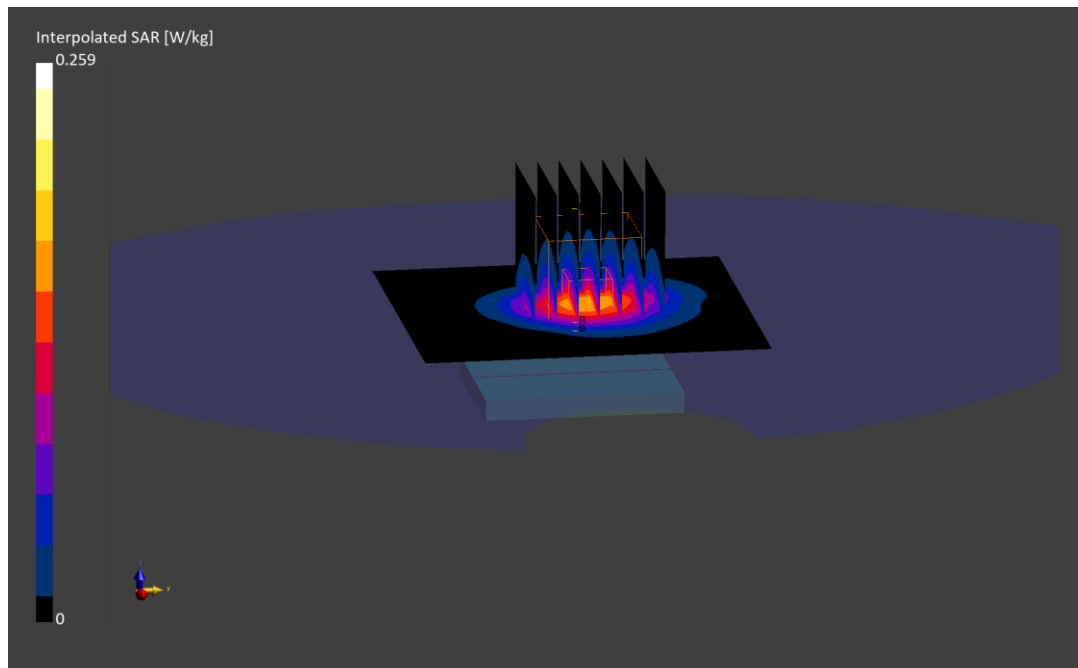

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: NWD2D

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2441.000$ MHz; $\text{cond} = 1.83$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/12/2025; Ambient Temp: 21.5°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 2.4 GHz Bluetooth, Exp: Extremity| Back Side, Ch. 0, 1 Mbps
Titanium, Metal Loop Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.09 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(10 g) = 0.036 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.0 %

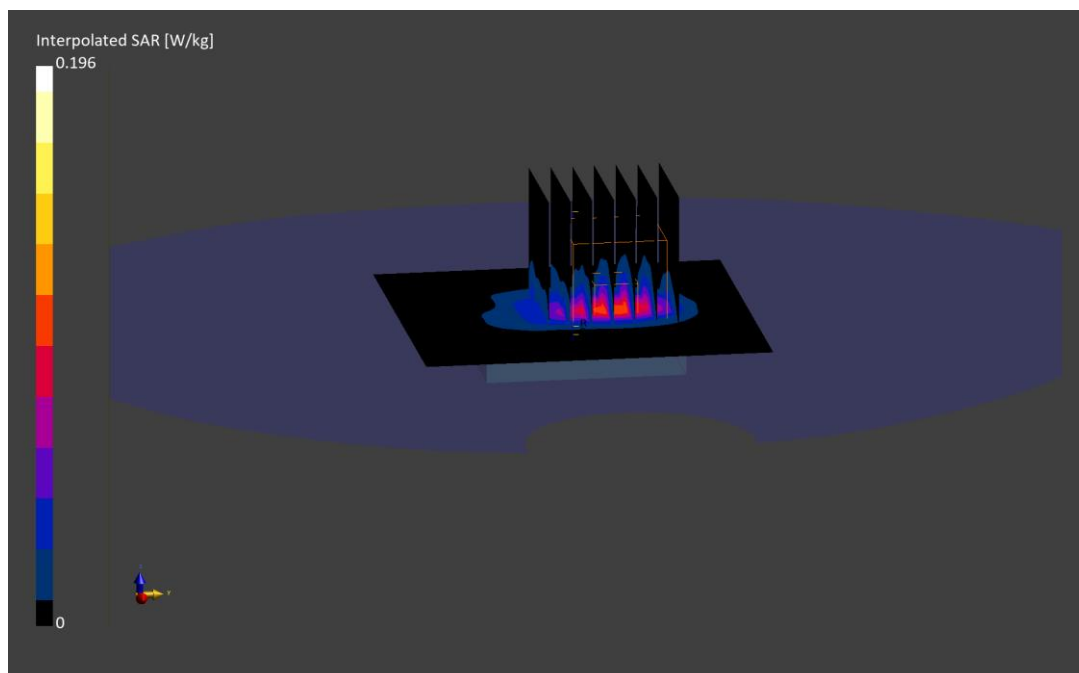

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: Q7RV2

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 5786.3 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5786.3$ MHz; $\text{cond} = 5.18$ S/m; $\text{perm} = 34.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/22/2025; Ambient Temp: 20.3°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7499; ConvF:(4.93,5.05,5.22); Calibrated: 2025-01-14

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1465; Calibrated: 2025-01-08

Phantom: Twin-SAM V8.0; Serial: 2070

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 802.15.4 ab-NB, Exp: Head| Front Side, Ch. Mid, 1 Mbps
Aluminum, Metal Links Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.064 W/kg

SAR(1 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below is 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.8 %

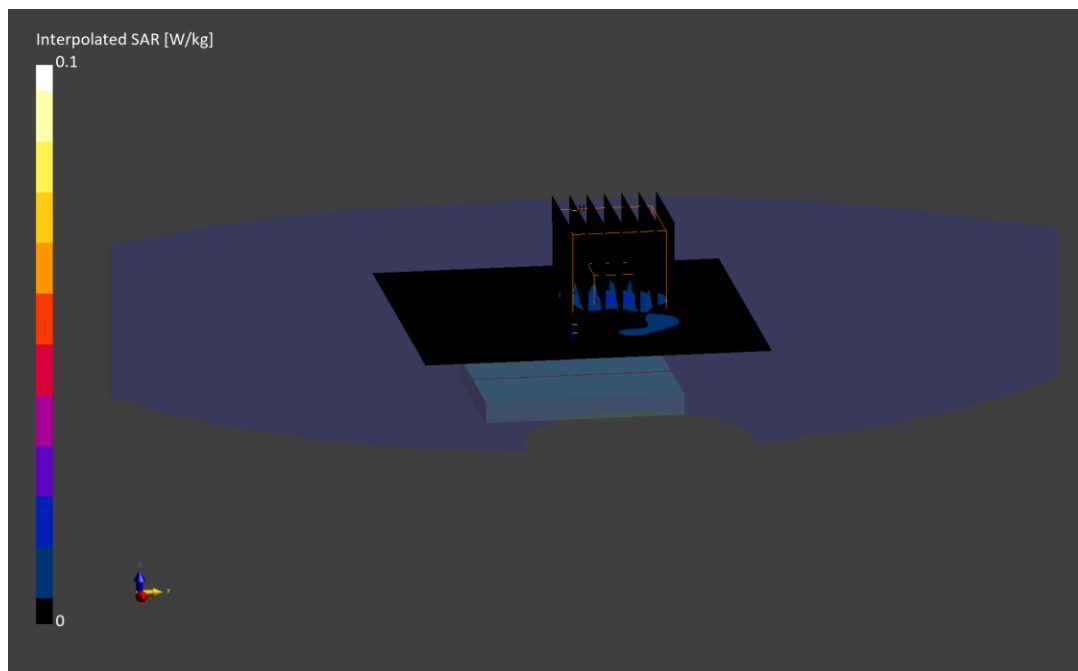

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: 5VJF2

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 5786.3 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5786.3$ MHz; $\text{cond} = 5.24$ S/m; $\text{perm} = 34.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/24/2025; Ambient Temp: 21.1°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7782; ConvF:(5.28,4.62,4.52); Calibrated: 2024-09-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1646; Calibrated: 2024-09-03

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 802.15.4 ab-NB, Exp: Extremity| Back Side, Ch. Mid, 1 Mbps
Aluminum, Sport Wristband

Area Scan (80.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.00 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.006 W/kg

SAR(10 g) = 0 W/kg

Smallest distance from peaks to all points 3 dB below is 0.0 mm

Ratio of SAR at M2 to SAR at M1 = 51.6 %

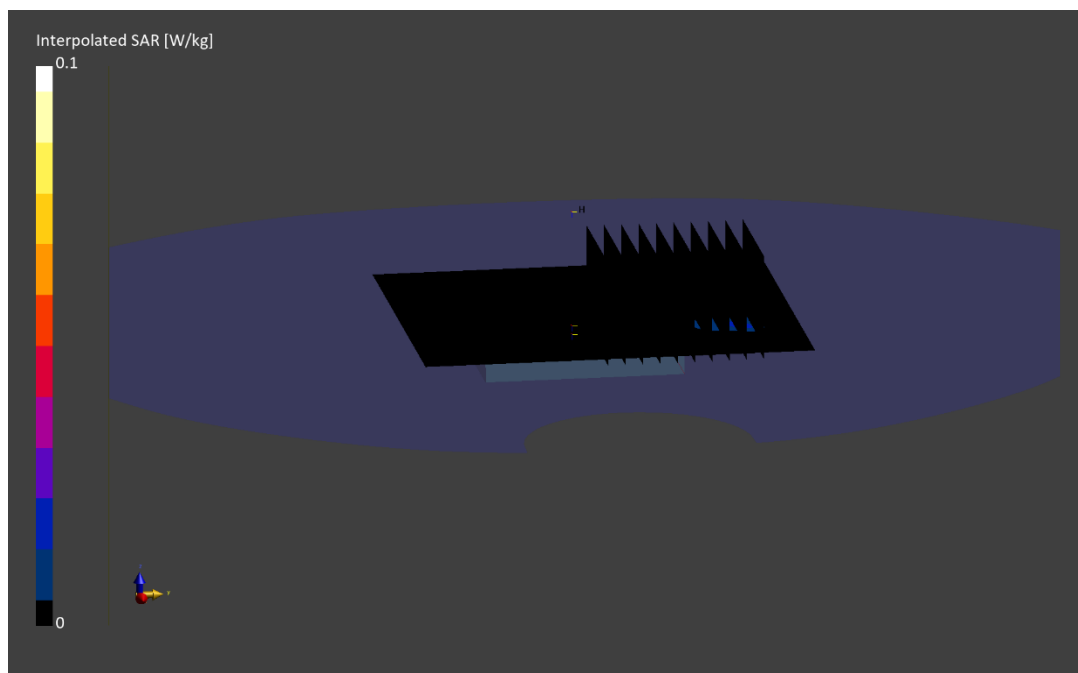

ELEMENT

DUT: BCG-A3337; Type: Watch; Serial: PQDPF

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 13.600 MHz

Medium: 30 Head; Medium parameters used:

$f = 13.600$ MHz; $\text{cond} = 0.746$ S/m; $\text{perm} = 55.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/09/2025; Ambient Temp: 22.3°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3746; ConvF:(15.27,15.58,17.13); Calibrated: 2024-10-15

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1237; Calibrated: 2024-10-10

Phantom: ELI V6.0; Serial: 2003

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NFC, Exp: Extremity| Back Side
Aluminum, Metal Links Wristband

Area Scan (90.0 x 105.0): Measurement grid: $\text{dx}=15.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5

Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.01 W/kg

SAR(10 g) = 0 W/kg

Smallest distance from peaks to all points 3 dB below is 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 73.7 %

