



FCC CFR47 PART 15 SUBPART E

**CERTIFICATION TEST REPORT
CLASS II PERMISSIVE CHANGE**

FOR

QUAD-BAND RADIO WITH WLAN AND BT RADIO

MODEL NUMBER: A1529

FCC ID: BCG-E2694A

REPORT NUMBER: 15U21850-E38V2

ISSUE DATE: NOVEMBER 24, 2015

Prepared for

**APPLE INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	11/16/15	Initial issue. Upgrade 13U15037-13 report to 5.2/5.3/5.6GHz band to new rule per KDB 789033 D02 v01.	T. Chu
V2	11/24/15	Revised report to address TCB's questions	T. Chu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>SAMPLE CALCULATION</i>	7
4.3. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE</i>	8
5.3. <i>MAXIMUM OUTPUT POWER</i>	8
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	9
5.5. <i>SOFTWARE AND FIRMWARE</i>	9
5.6. <i>WORST-CASE CONFIGURATION AND MODE</i>	9
5.7. <i>DESCRIPTION OF TEST SETUP</i>	10
6. TEST AND MEASUREMENT EQUIPMENT	13
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	14
7.1.1. <i>ON TIME AND DUTY CYCLE RESULTS</i>	14
7.1.2. <i>MEASUREMENT METHOD FOR POWER AND PPSD</i>	14
7.1.3. <i>MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz</i>	14
7.1.4. <i>DUTY CYCLE PLOTS</i>	15
8. ANTENNA PORT TEST RESULTS	17
8.1. <i>802.11a MODE IN THE 5.2 GHz BAND</i>	17
8.1.1. <i>26 dB BANDWIDTH</i>	17
8.1.2. <i>99% BANDWIDTH</i>	19
8.1.3. <i>AVERAGE POWER</i>	21
8.1.4. <i>OUTPUT POWER AND PSD</i>	22
8.2. <i>802.11n HT20 MODE IN THE 5.2 GHz BAND</i>	26
8.2.1. <i>26 dB BANDWIDTH</i>	26
8.2.2. <i>99% BANDWIDTH</i>	28
8.2.3. <i>AVERAGE POWER</i>	30
8.2.4. <i>OUTPUT POWER AND PSD</i>	31
8.3. <i>802.11n HT40 MODE IN THE 5.2 GHz BAND</i>	35
8.3.1. <i>26 dB BANDWIDTH</i>	35
8.3.2. <i>99% BANDWIDTH</i>	37
8.3.3. <i>AVERAGE POWER</i>	39

8.3.4. OUTPUT POWER AND PPSD	40
8.4. 802.11a MODE IN THE 5.3 GHz BAND.....	43
8.4.1. 26 dB BANDWIDTH.....	43
8.4.2. 99% BANDWIDTH.....	45
8.4.3. AVERAGE POWER.....	47
8.4.4. OUTPUT POWER AND PPSD	48
8.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND	52
8.5.1. 26 dB BANDWIDTH.....	52
8.5.2. 99% BANDWIDTH.....	54
8.5.3. AVERAGE POWER.....	56
8.5.4. OUTPUT POWER AND PPSD	57
8.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND	61
8.6.1. 26 dB BANDWIDTH.....	61
8.6.2. 99% BANDWIDTH.....	63
8.6.3. AVERAGE POWER.....	65
8.6.4. OUTPUT POWER AND PPSD	66
8.7. 802.11a MODE IN THE 5.6 GHz BAND.....	69
8.7.1. 26 dB BANDWIDTH.....	69
8.7.2. 99% BANDWIDTH.....	71
8.7.3. AVERAGE POWER.....	73
8.7.4. OUTPUT POWER AND PPSD	74
8.8. 802.11n HT20 MODE IN THE 5.6 GHz BAND	78
8.8.1. 26 dB BANDWIDTH.....	78
8.8.2. 99% BANDWIDTH.....	80
8.8.3. AVERAGE POWER.....	82
8.8.4. OUTPUT POWER AND PPSD	83
8.9. 802.11n HT40 MODE IN THE 5.6 GHz BAND	87
8.9.1. 26 dB BANDWIDTH.....	87
8.9.2. 99% BANDWIDTH.....	89
8.9.3. AVERAGE POWER	91
8.9.4. OUTPUT POWER AND PPSD	92
9. RADIATED TEST RESULTS.....	96
9.1. LIMITS AND PROCEDURE	96
9.2. TRANSMITTER ABOVE 1 GHz	97
9.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND	97
9.2.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	105
9.2.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	113
9.2.4. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND	119
9.2.5. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	127
9.2.6. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	135
9.2.7. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND	141
9.2.8. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND.....	150
9.2.9. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND	159
9.2.10. 2.4GHz and 5GHz Band Co-Location.....	168
9.3. WORST-CASE BELOW 1 GHz.....	172
9.4. RECEIVER ABOVE 1 GHz	174

10. AC POWER LINE CONDUCTED EMISSIONS	175
11. DYNAMIC FREQUENCY SELECTION	179
11.1. <i>OVERVIEW</i>	179
11.1.1. <i>LIMITS</i>	179
11.1.2. <i>TEST AND MEASUREMENT SYSTEM</i>	182
11.1.3. <i>SETUP OF EUT (CLIENT MODE)</i>	185
11.1.4. <i>SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)</i>	186
11.1.5. <i>DESCRIPTION OF EUT</i>	187
11.2. <i>CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH</i>	189
11.2.1. <i>TEST CHANNEL</i>	189
11.2.2. <i>RADAR WAVEFORM AND TRAFFIC</i>	189
11.2.3. <i>OVERLAPPING CHANNEL TESTS</i>	191
11.2.4. <i>MOVE AND CLOSING TIME</i>	191
11.3. <i>CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH</i>	196
11.3.1. <i>TEST CHANNEL</i>	196
11.3.2. <i>RADAR WAVEFORM AND TRAFFIC</i>	196
11.3.3. <i>OVERLAPPING CHANNEL TESTS</i>	198
11.3.4. <i>MOVE AND CLOSING TIME</i>	198
11.3.5. <i>NON-OCCUPANCY PERIOD</i>	203
11.4. <i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH</i>	204
11.4.1. <i>TEST CHANNEL</i>	204
11.4.2. <i>RADAR WAVEFORM AND TRAFFIC</i>	204
11.4.3. <i>OVERLAPPING CHANNEL TESTS</i>	206
11.4.4. <i>MOVE AND CLOSING TIME</i>	206
11.5. <i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH</i>	211
11.5.1. <i>TEST CHANNEL</i>	211
11.5.2. <i>RADAR WAVEFORM AND TRAFFIC</i>	211
11.5.3. <i>OVERLAPPING CHANNEL TESTS</i>	213
11.5.4. <i>MOVE AND CLOSING TIME</i>	213
13. SETUP PHOTOS	218

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: QUAD-BAND RADIO WITH WLAN AND BT RADIO

MODEL: A1529

SERIAL NUMBER: C7JKV03GFLW6 (DVT-9GW10C-2099) (RF) and
C7JKT0UEFLW7 (DFS)

DATE TESTED: JUNE 17 to JUNE 25, 2013 (RF) and JULY 16, 2013 (DFS)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:


Thu Chan
WiSE Operations Manager
UL Verification Services Inc.

Tested By:


Francisco Guarnero
WiSE Lab Technician
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v01r02/D03 v01r01/D06 v01, FCC KDB 789033 D02 v01, ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Model A1529 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/LTE radio, IEEE 802.11a/b/g/n, Bluetooth and GPS radio. The rechargeable battery is not user accessible.

5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

Upgrade 5.2/5.3/5.6GHz band to new rule per KDB 789033 D02 v01.

We have reviewed the original test report for UNII-1, UNII-2A and UNII-2C bands and are hereby attesting that all current technical requirements are still met and all applicable test procedures remain the same. Therefore, the original report is still applicable and no additional testing is done.

We updated the following on this report:

- Updated report to latest KDB 789033 D02 v01.
- 5.2G output power table limit/PPSD limit.
- Removed IC related information.
- Removed Peak Excursion.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	14.25	26.61
5180 - 5240	802.11n HT20	14.18	26.18
5190 - 5230	802.11n HT40	16.45	44.16
5260 - 5320	802.11a	16.04	40.18
5260 - 5320	802.11n HT20	16.25	42.17
5270 - 5310	802.11n HT40	16.28	42.46
5500 - 5700	802.11a	14.18	26.18
5500 - 5700	802.11n HT20	14.23	26.49
5510 - 5670	802.11n HT40	14.26	26.67

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain as below table.

FREQUENCY (MHZ)	ANTENNA GAIN (dBi)
2400 - 2483.5	0.21
5150 - 5250	-0.73
5250 - 5350	-0.37
5500 - 5700	1.31
5725 - 5850	1.59

5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was WL Tool FW 6.10.56.166

5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel for RF radiated emissions below 1GHz tests is channel with highest RF output power.

Based on the investigation results, the highest peak power and enhanced data rate is the worst-case scenario for all measurements.

For the fundamental investigation, the EUT is investigated for vertical and horizontal antenna orientations and the worst case was determined to be at X-position.

Based on the manufacturer's attestation that the nominal output power is reduced as the data rate increases, the data rates tested represent the highest power and worst-case with respect to EMC performance.

Worst-case data rates were used:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC adapter	Apple	A1385	D292365D11QDHLHCA
Earphone	Apple	NA	NA

I/O CABLES (Conducted Setup)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Shielded	0.1m	To Spectrum Analyzer


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Jack	1	Earphone	Unshielded	0.5m	N/A


TEST SETUP

The EUT is a stand-alone device.


SETUP DIAGRAM FOR TESTS

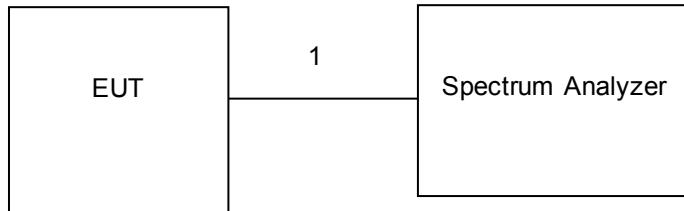

SETUP DIAGRAM FOR RADIATED TESTS

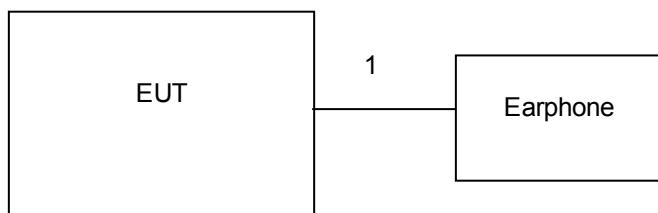

SETUP DIAGRAM FOR AC POWER CONDUCTED TESTS

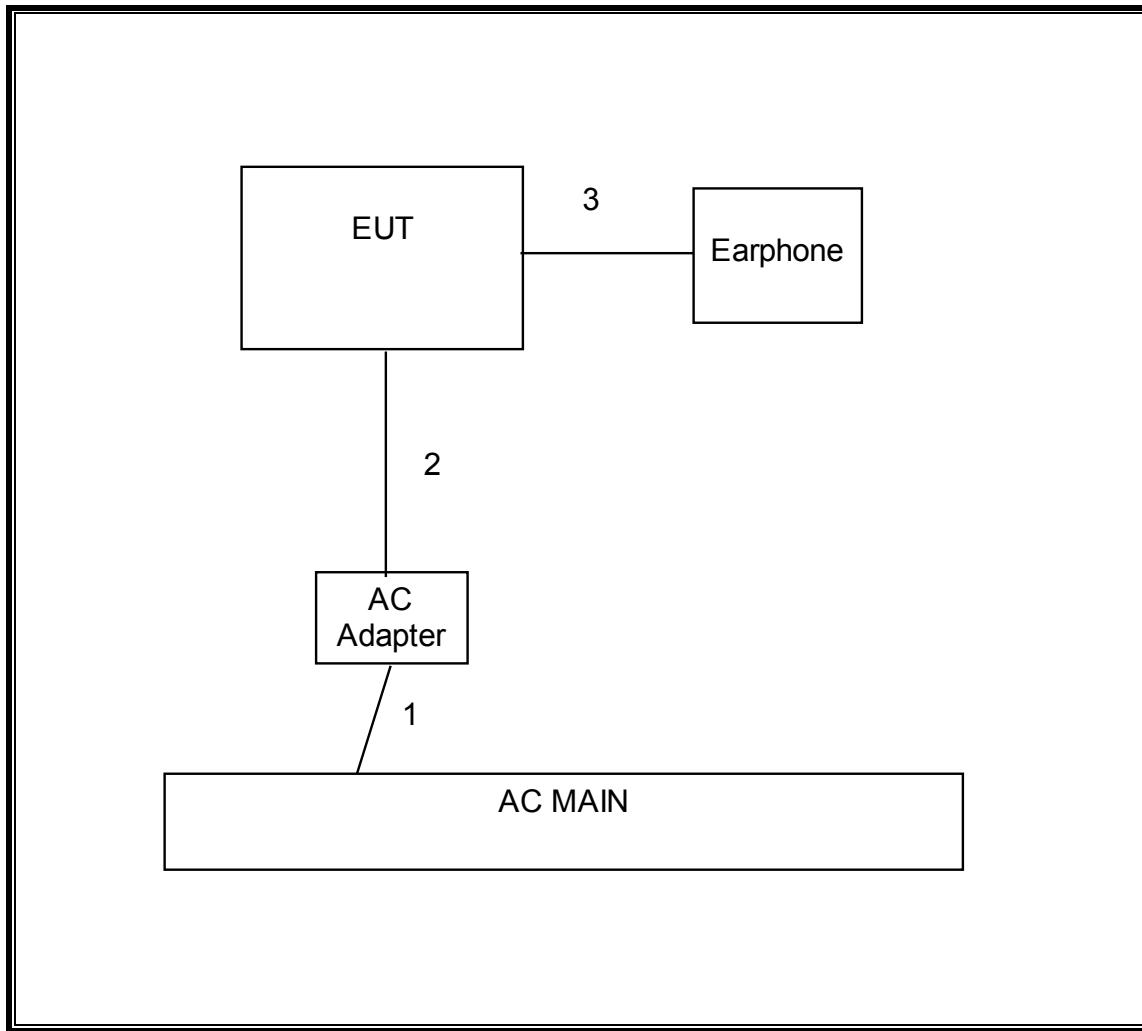

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Horn Antenna 1-18GHz	ETS Lindgren	3117	F00133	02/19/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/14
Antenna, Horn, 26.5 GHz	ARA	SWH-28	C01015	05/06/14
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB3	F00215	03/07/14
Peak / Average Power Sensor	Agilent / HP	E9323A	F00026	07/27/13
P-Series single channel Power Meter	Agilent / HP	N1911A	F00153	07/26/13
Spectrum Analyzer, 3Hz-44GHz	Agilent	N9030A	F00127	02/22/14
PreApmplifier, 1-26.5GHz	Agilent	8449B	C01052	10/22/13
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	04/17/14
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	C00981	06/14/14
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/08/13
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/02/13

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.1.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a 20 MHz	2.03	2.07	0.980	98.0%	0.09	0.493
802.11n HT20	1.91	1.94	0.985	98.5%	0.07	0.524
802.11n HT40	0.94	0.97	0.963	96.3%	0.16	1.070

7.1.2. MEASUREMENT METHOD FOR POWER AND PPSD

The Duty Cycle is greater than or equal to 98% therefore KDB 789033 Method SA-1 is used.



The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used.


7.1.3. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz

The Duty Cycle is greater than or equal to 98%, KDB 789033 Method AD with Power RMS Averaging is used.

The Duty Cycle is less than 98% and consistent, KDB 789033 Method AD with Power RMS Averaging and duty cycle correction is used.

7.1.4. DUTY CYCLE PLOTS

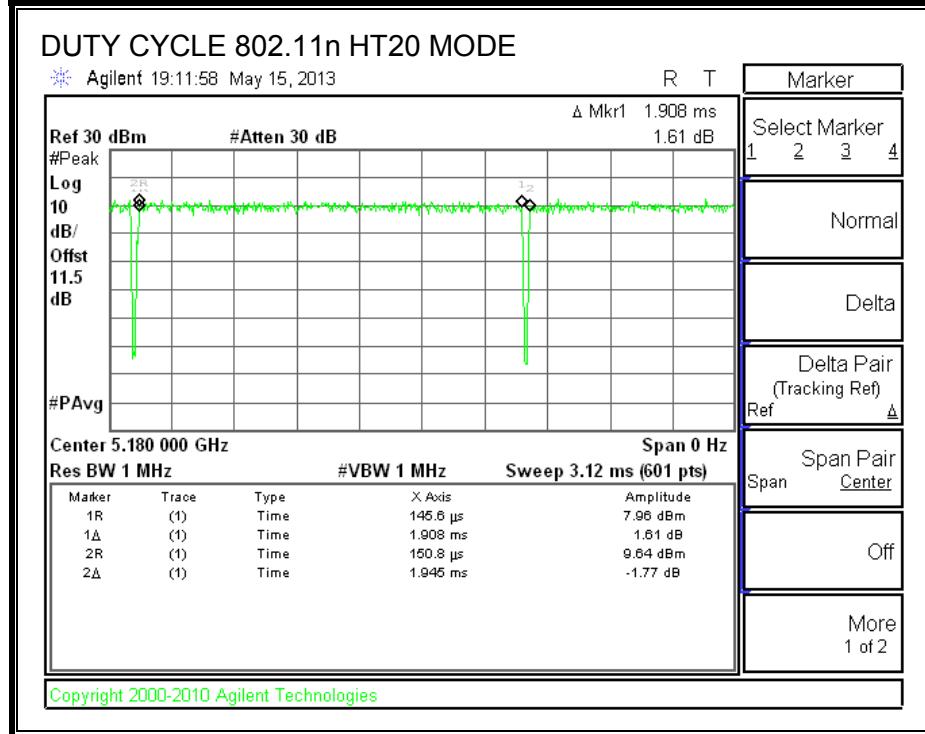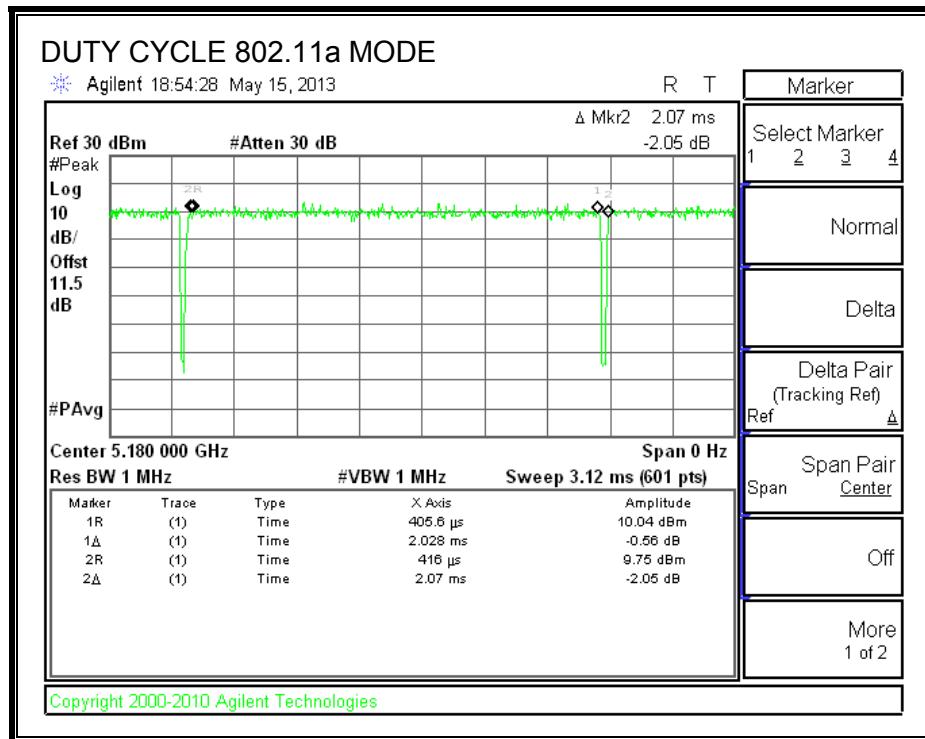

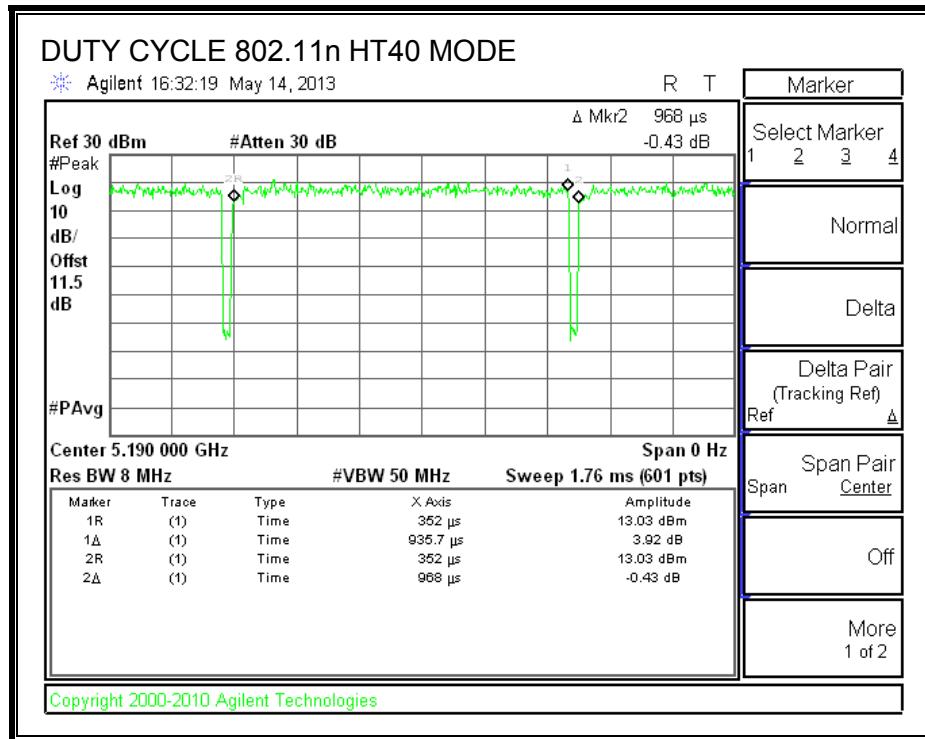

8. ANTENNA PORT TEST RESULTS

8.1. 802.11a MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.20
Mid	5200	19.20
High	5240	19.07

26 dB BANDWIDTH

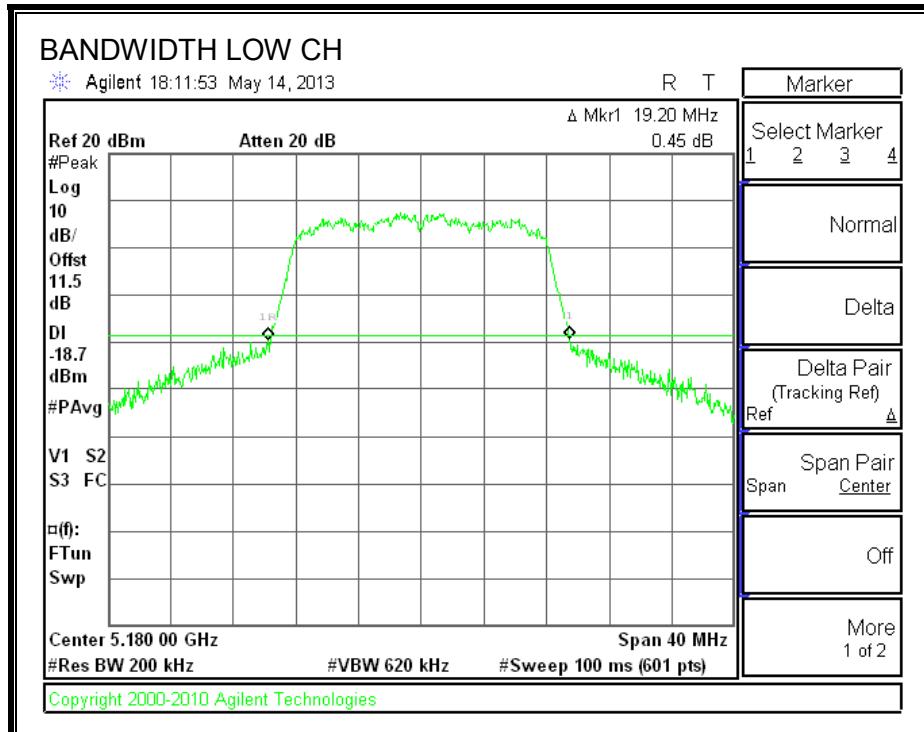

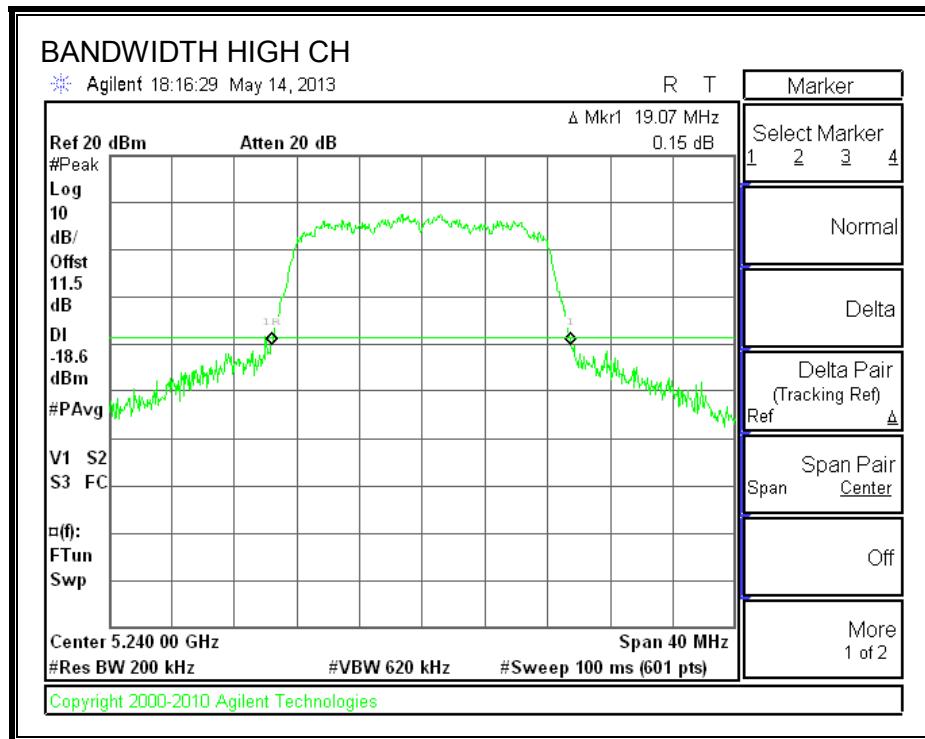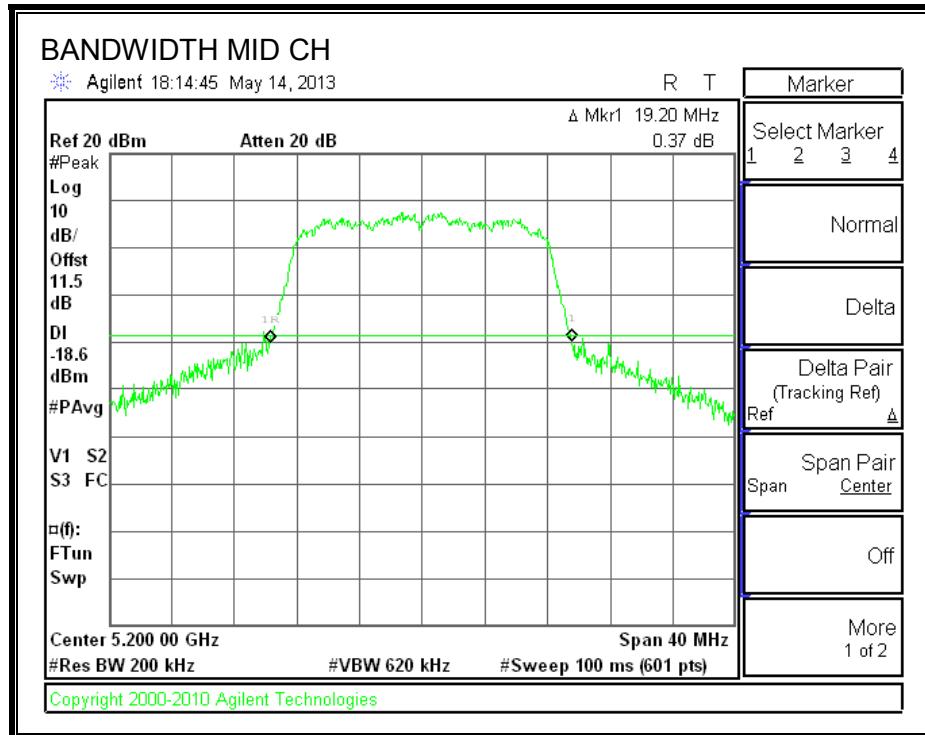

8.1.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	16.3351
Mid	5200	16.3323
High	5240	16.3216

99% BANDWIDTH

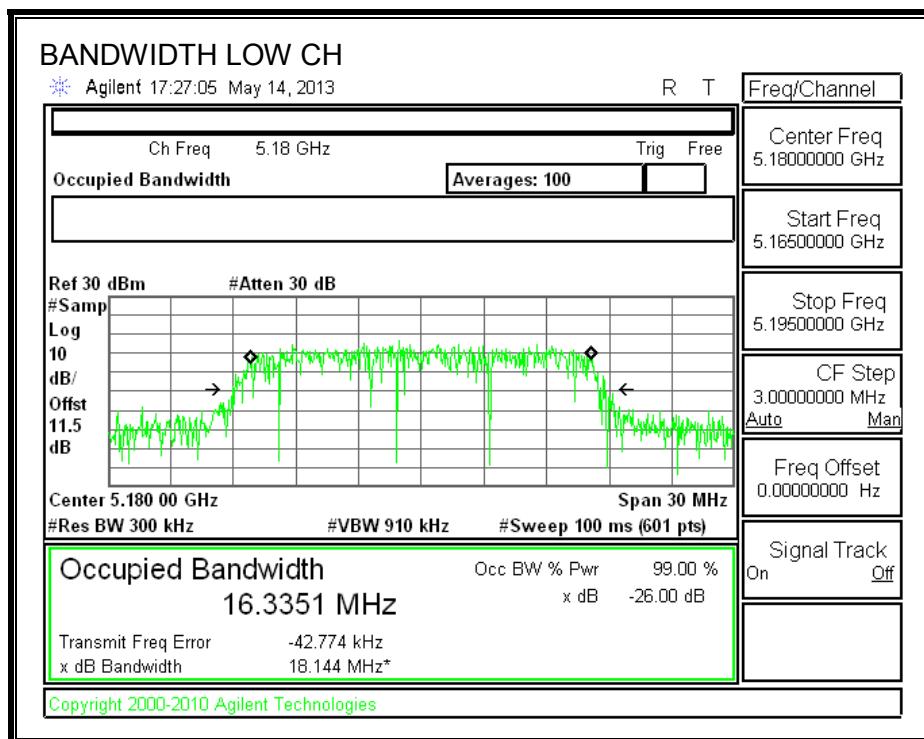

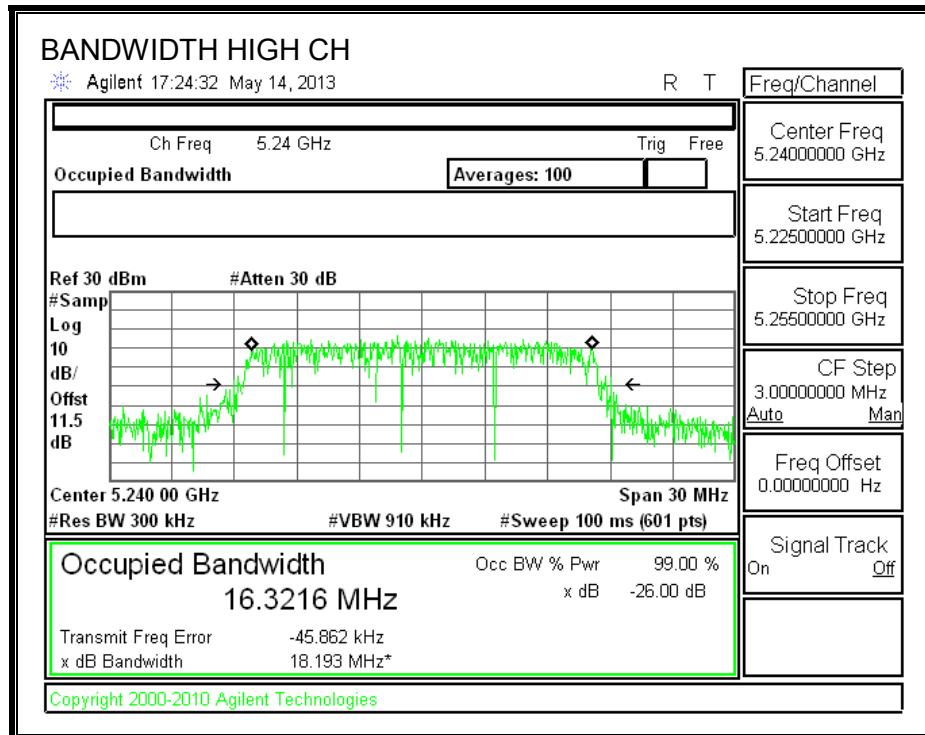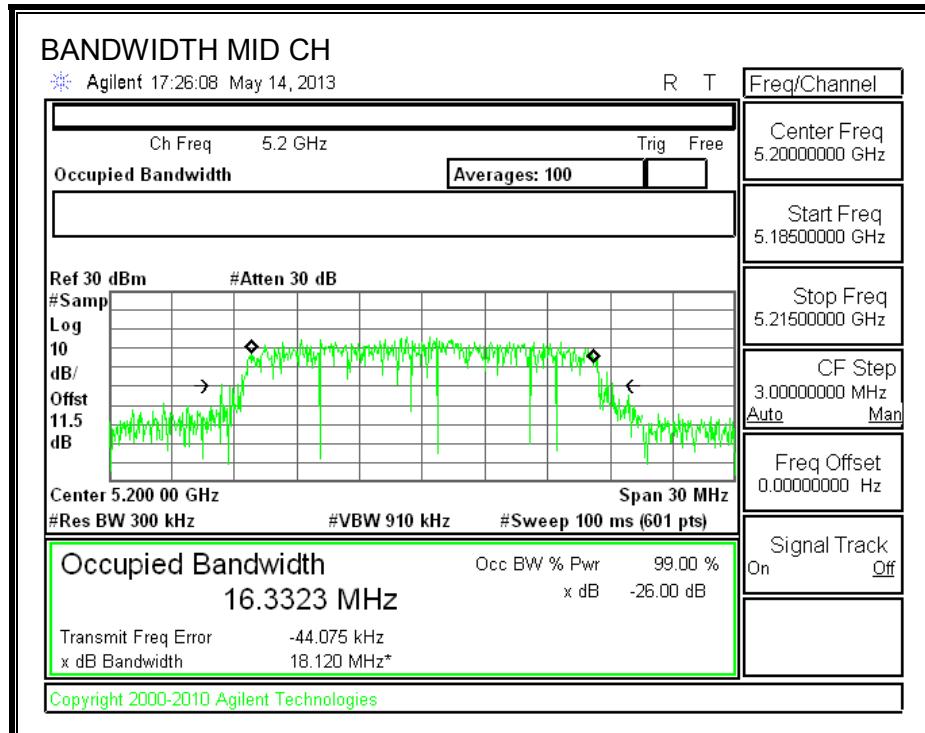

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	13.98
Mid	5200	13.81
High	5240	14.03

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain

Channel	Frequency (MHz)	Direction Gain (dBi)
Low	5180.00	-6.00
Mid	5200.00	-6.00
High	5240.00	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5180	24.00	11.00
Mid	5200	24.00	11.00
High	5240	24.00	11.00

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.161	14.25	24.00	-9.75
Mid	5200	14.025	14.12	24.00	-9.89
High	5240	14.060	14.15	24.00	-9.85

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.830	3.92	11.00	-7.08
Mid	5200	3.705	3.80	11.00	-7.21
High	5240	3.728	3.82	11.00	-7.18

OUTPUT POWER AND PSD

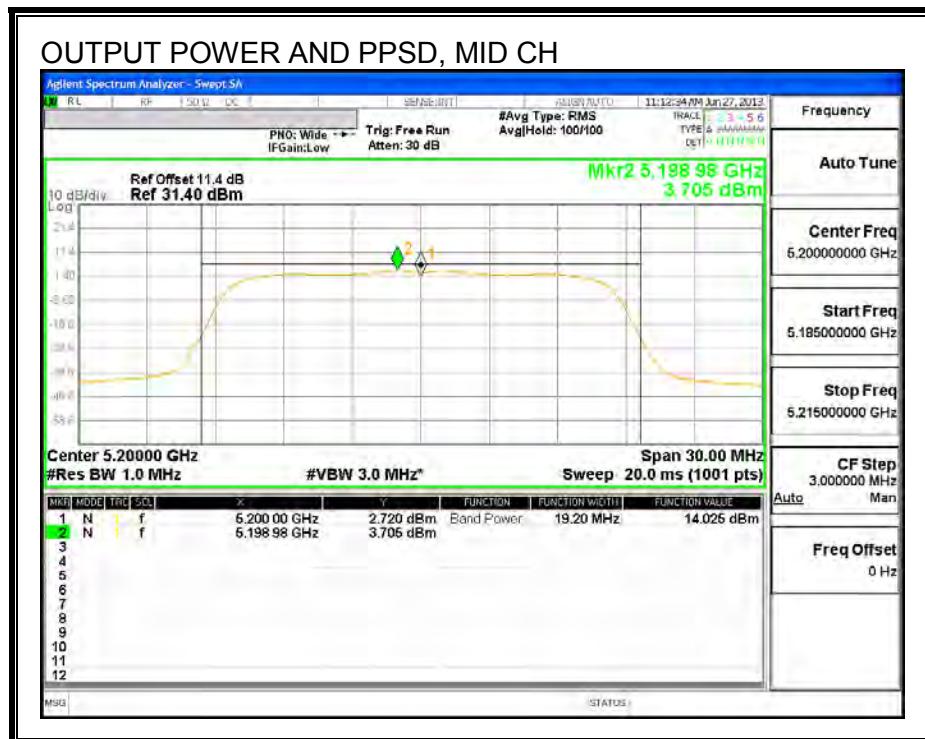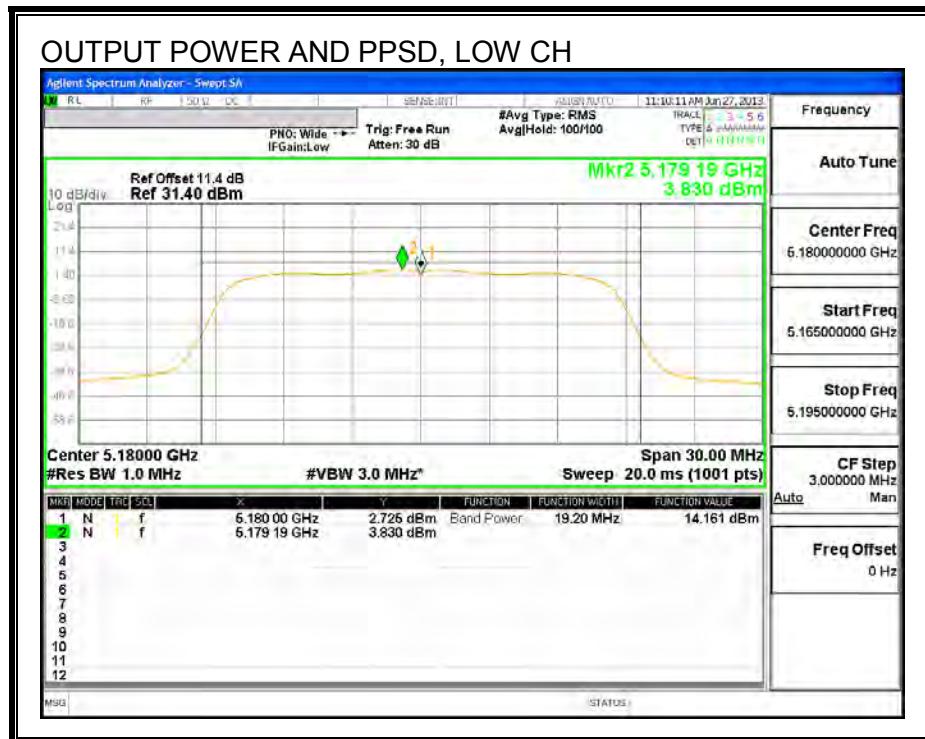

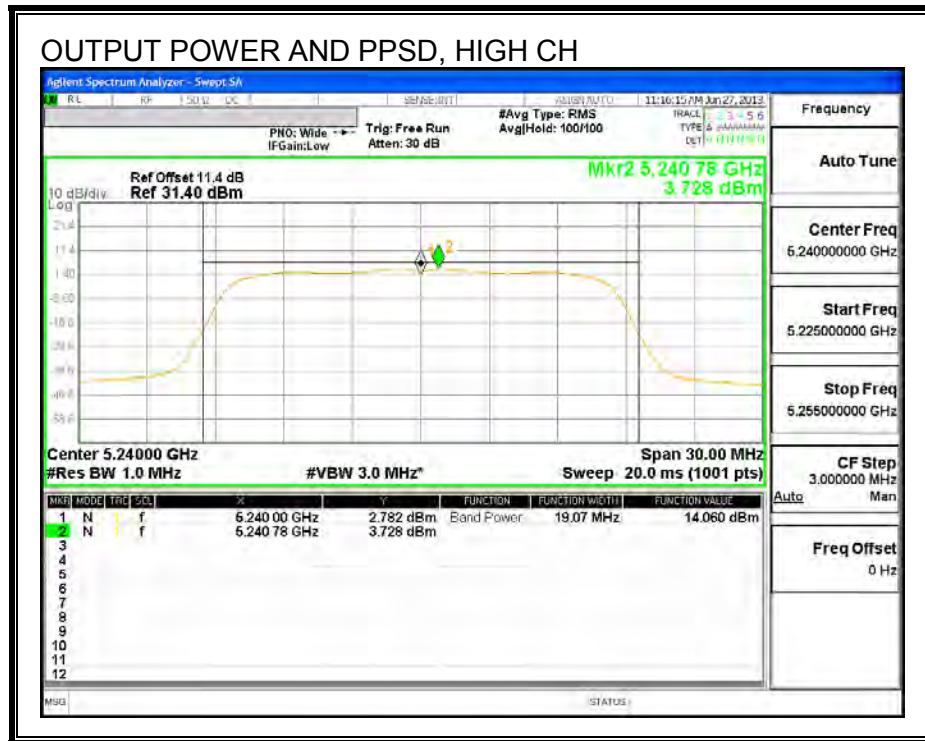

8.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.40
Mid	5200	19.40
High	5240	19.47

26 dB BANDWIDTH

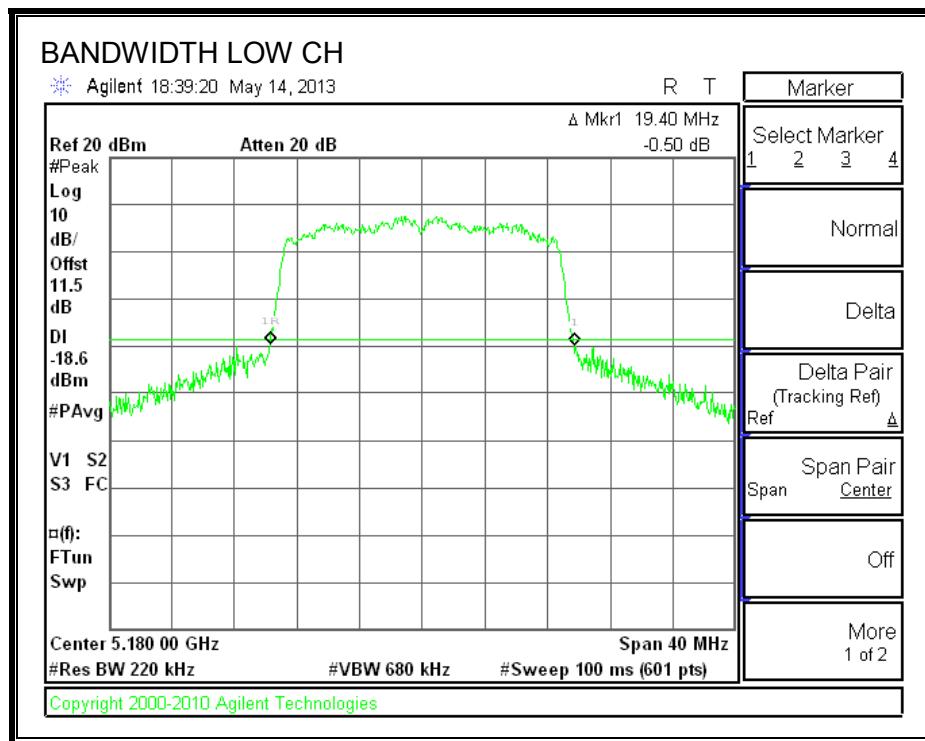

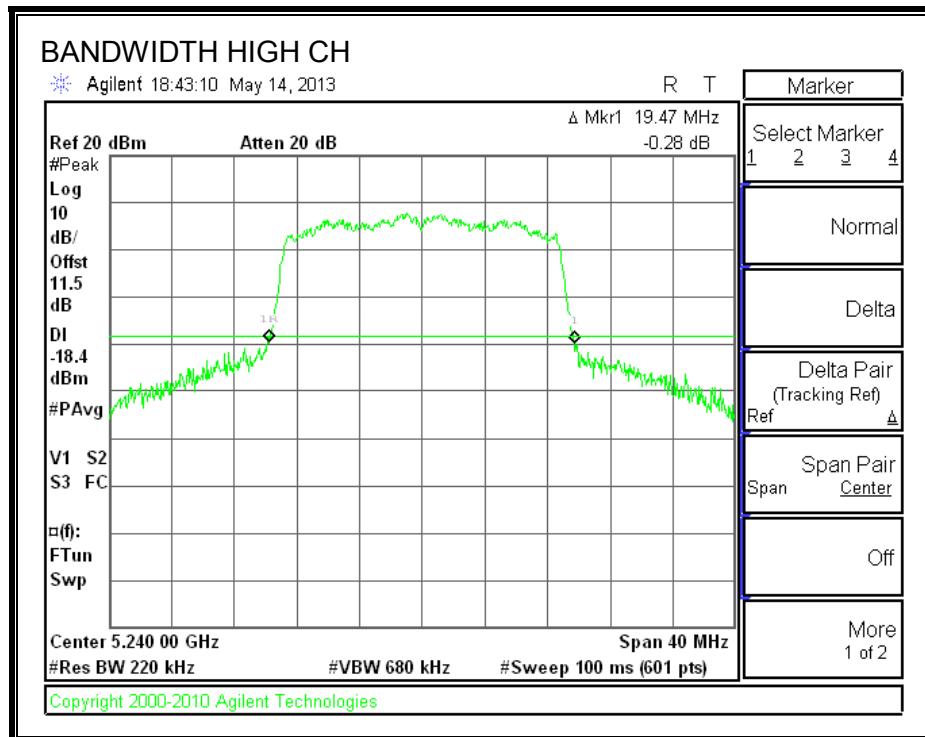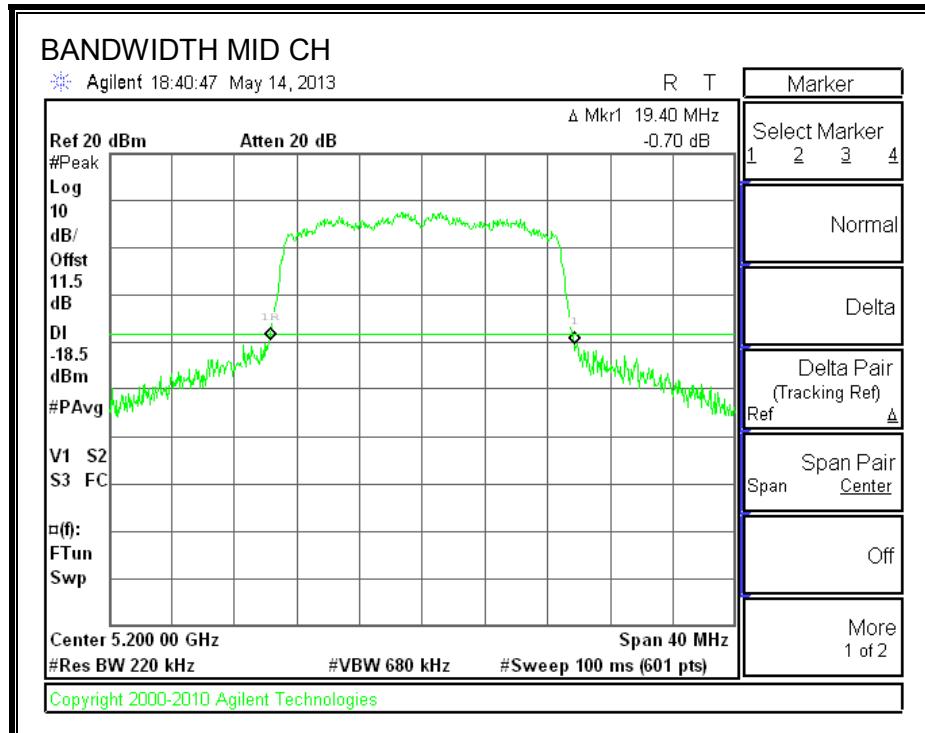

8.2.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.5140
Mid	5200	17.5162
High	5240	17.5368

99% BANDWIDTH

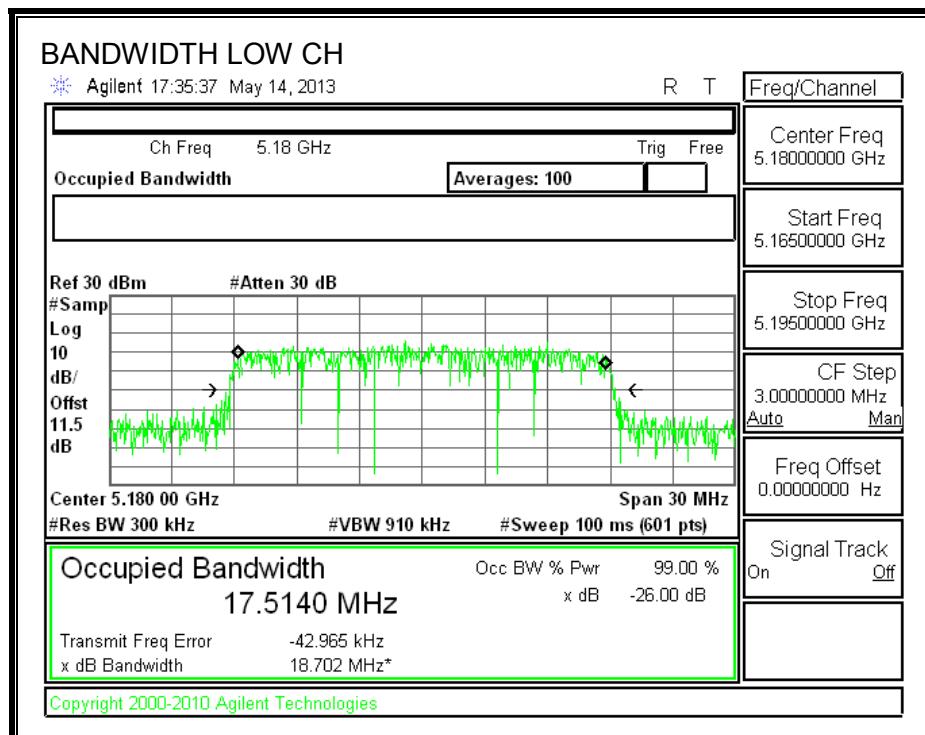

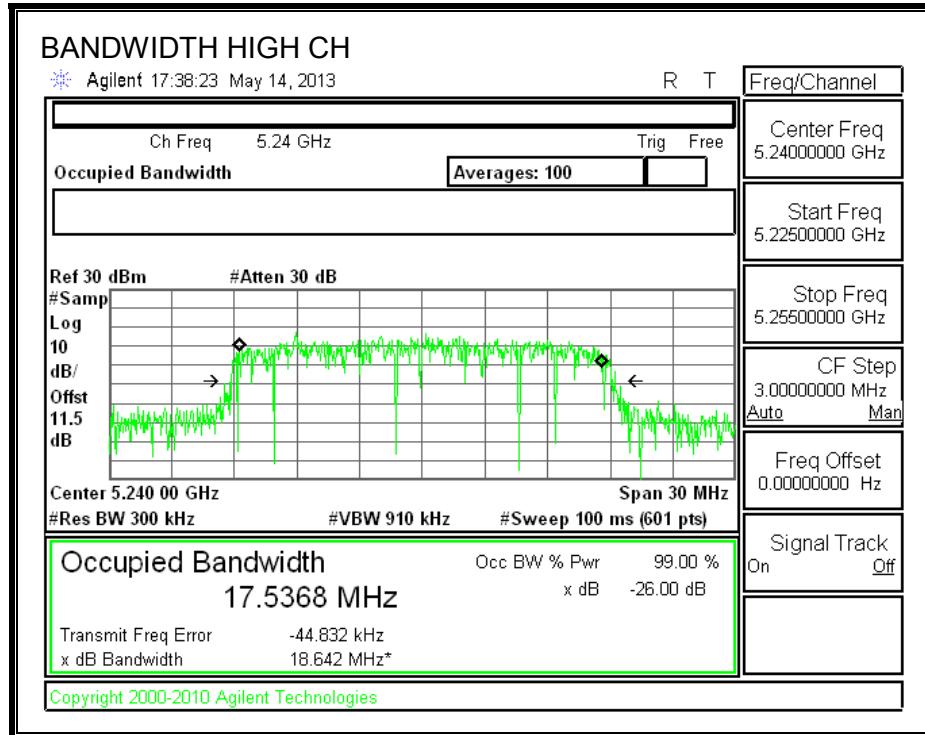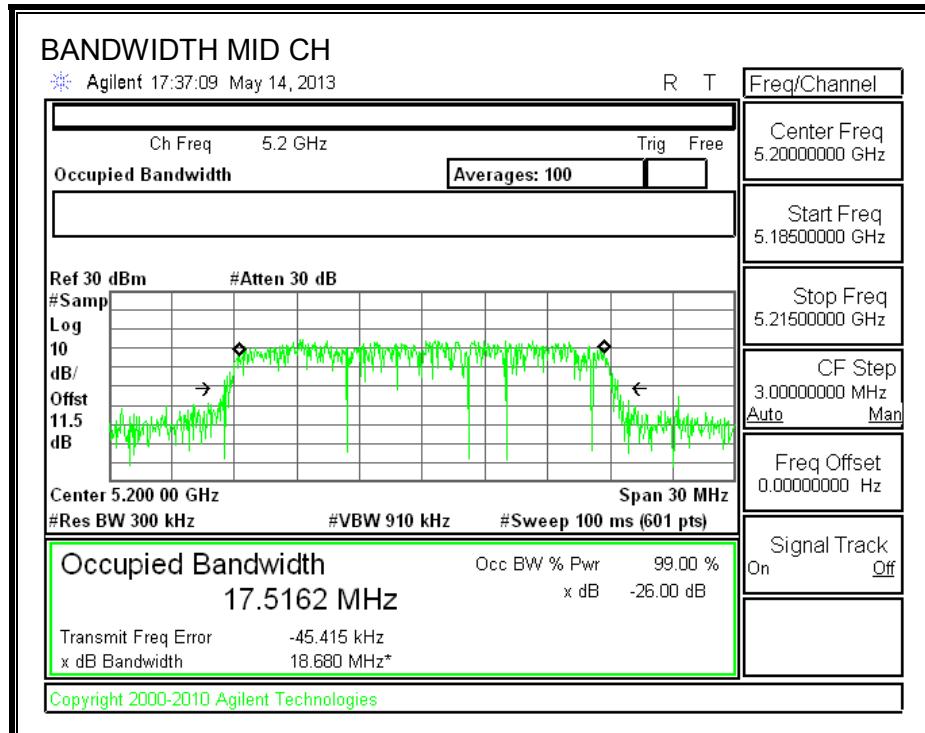

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	14.05
Mid	5200	14.01
High	5240	14.04

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain

Channel	Frequency (MHz)	Direction Gain (dBi)
Low	5180.00	-6.00
Mid	5200.00	-6.00
High	5240.00	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5180	24.00	11.00
Mid	5200	24.00	11.00
High	5240	24.00	11.00

Duty Cycle CF (dB)	0.07	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.992	14.06	24.00	-9.94
Mid	5200	14.110	14.18	24.00	-9.82
High	5240	14.011	14.08	24.00	-9.92

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.488	3.56	11.00	-7.44
Mid	5200	3.611	3.68	11.00	-7.32
High	5240	3.497	3.57	11.00	-7.43

OUTPUT POWER AND PSD

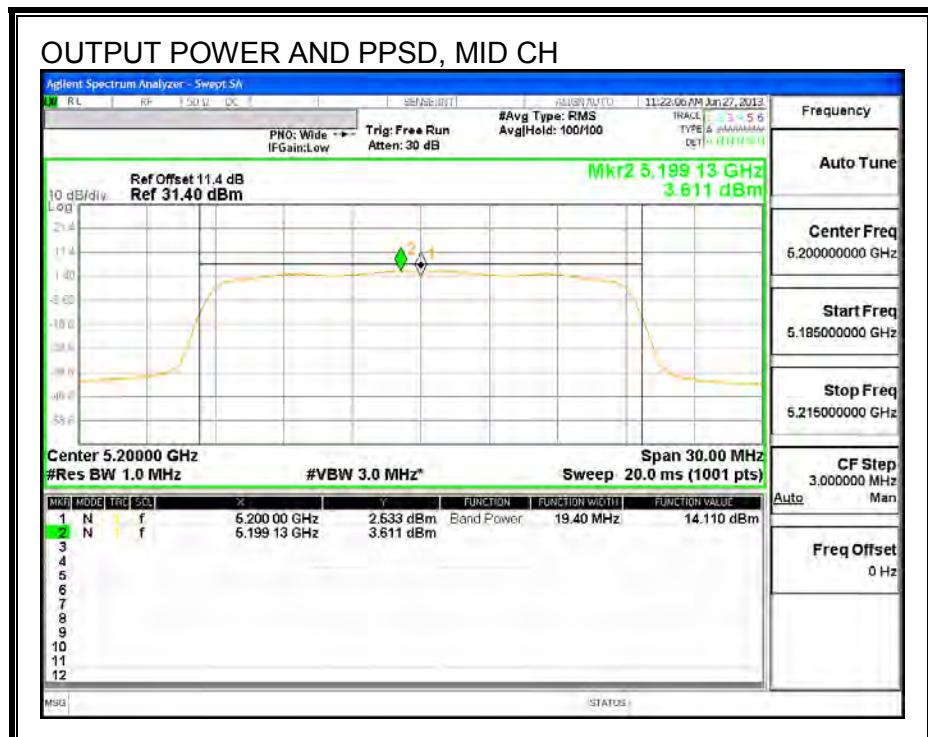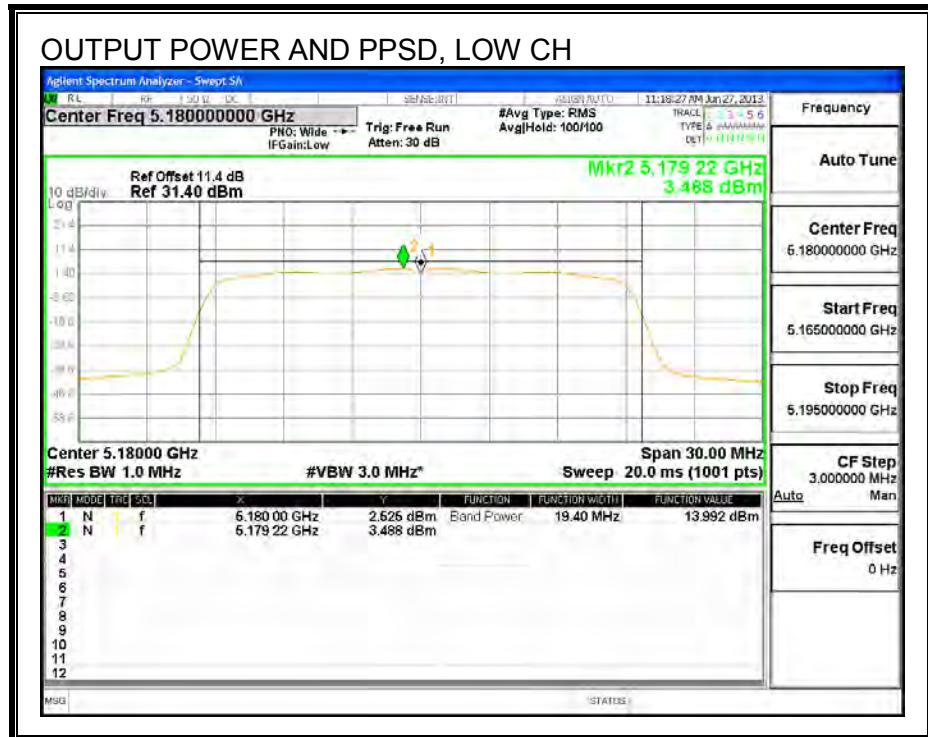

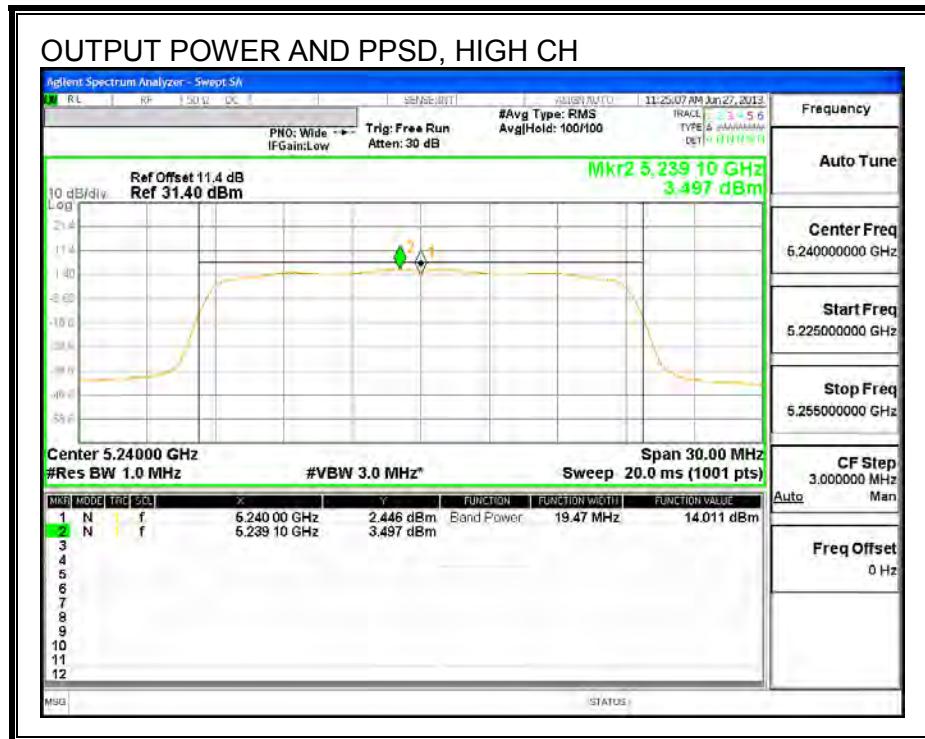

8.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	44.40
5230	5230	43.87

26 dB BANDWIDTH

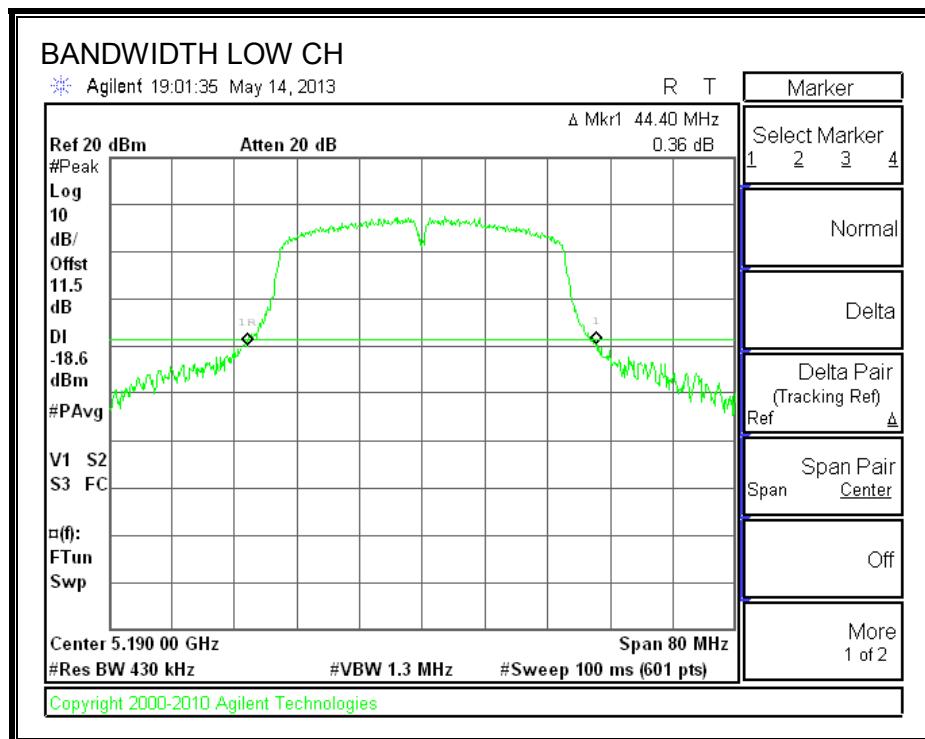

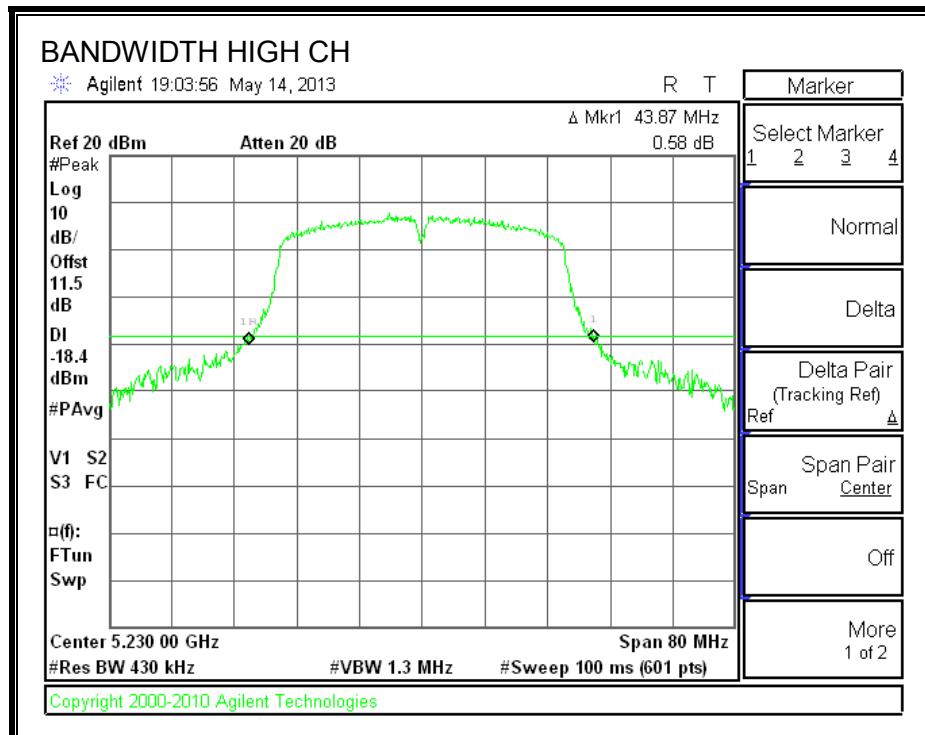

8.3.2. 99% BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	35.7778
High	5230	35.7688

99% BANDWIDTH

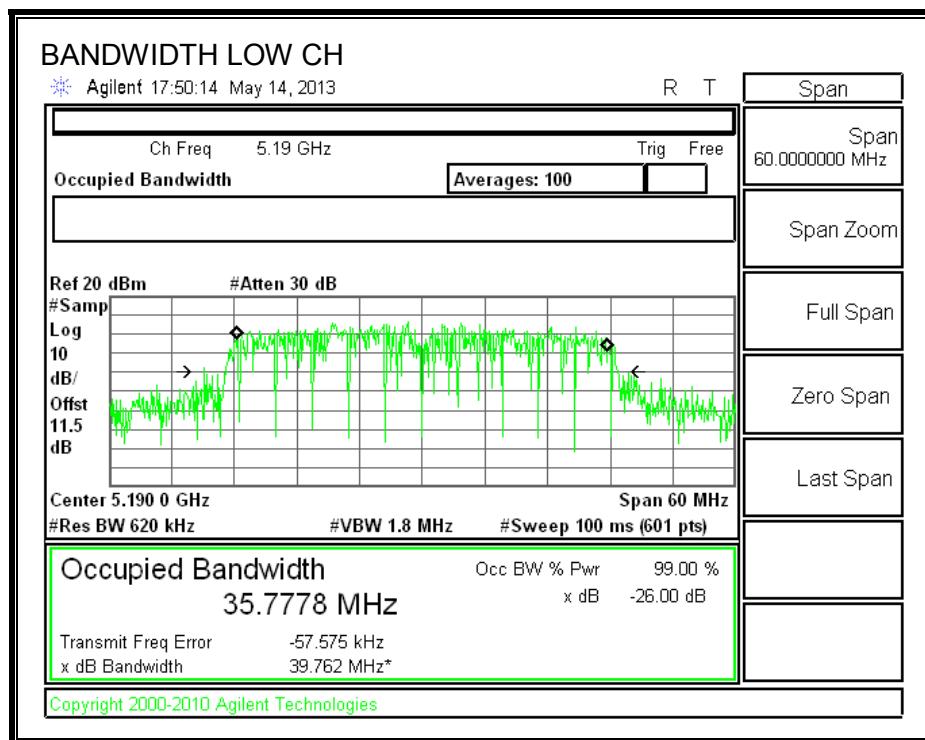

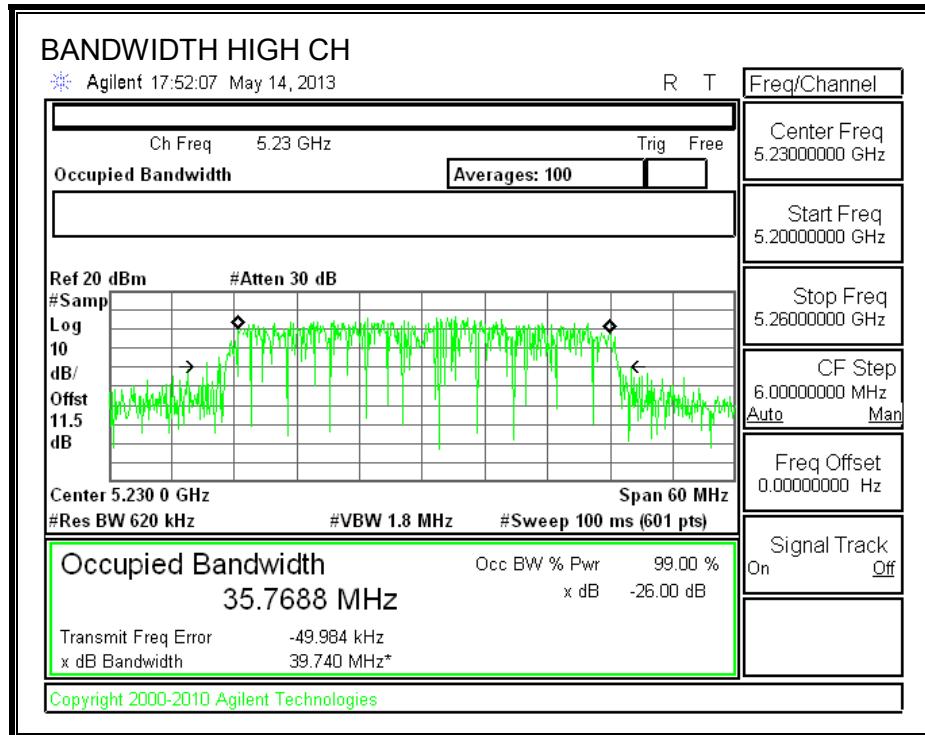

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5190	16.20
High	5230	16.00

8.3.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain

Channel	Frequency (MHz)	Direction Gain (dBi)
Low	5190	-6.00
High	5230	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5190	24.00	11.00
High	5230	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	16.286	16.45	24.00	-7.55
High	5230	16.043	16.20	24.00	-7.80

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	2.724	2.88	11.00	-8.12
High	5230	2.222	2.38	11.00	-8.62

OUTPUT POWER AND PPSD

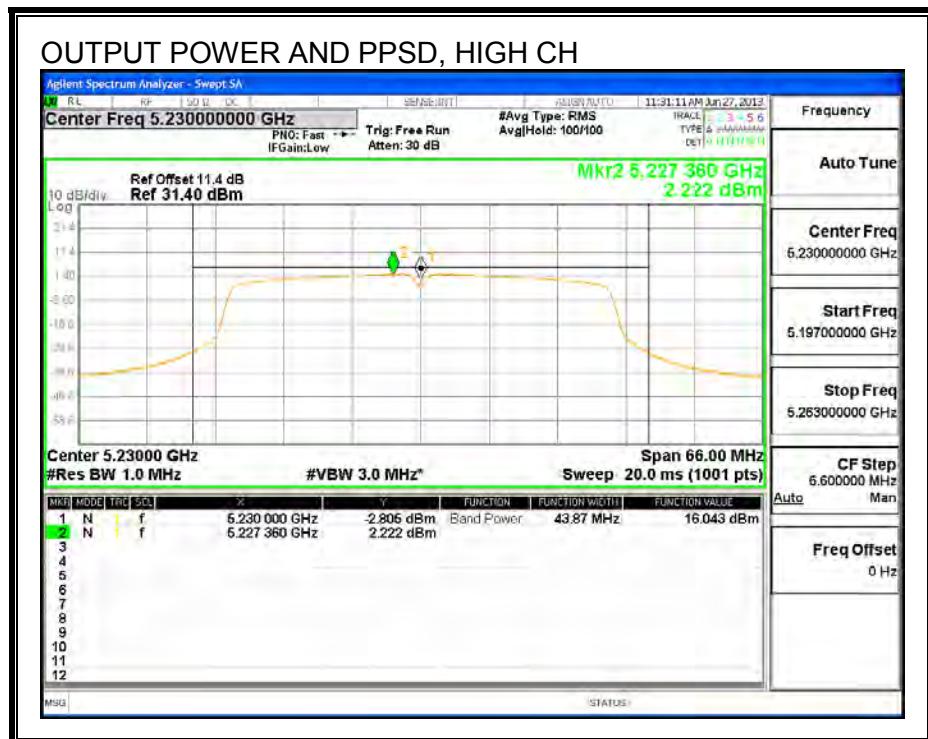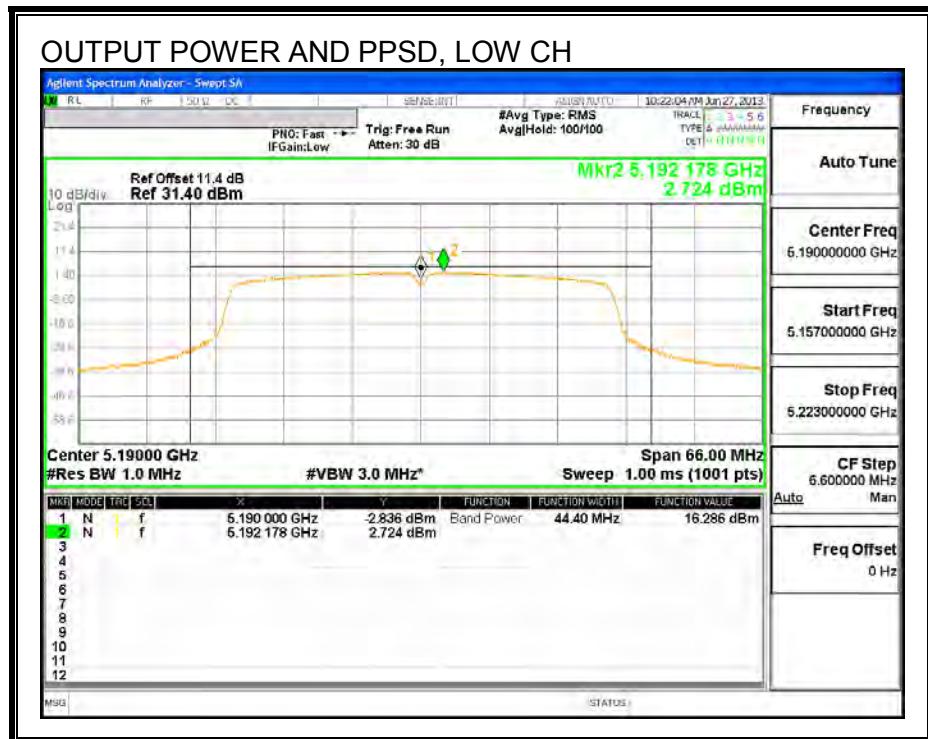

8.4. 802.11a MODE IN THE 5.3 GHz BAND

8.4.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	19.07
Mid	5300	19.13
High	5320	19.27

26 dB BANDWIDTH

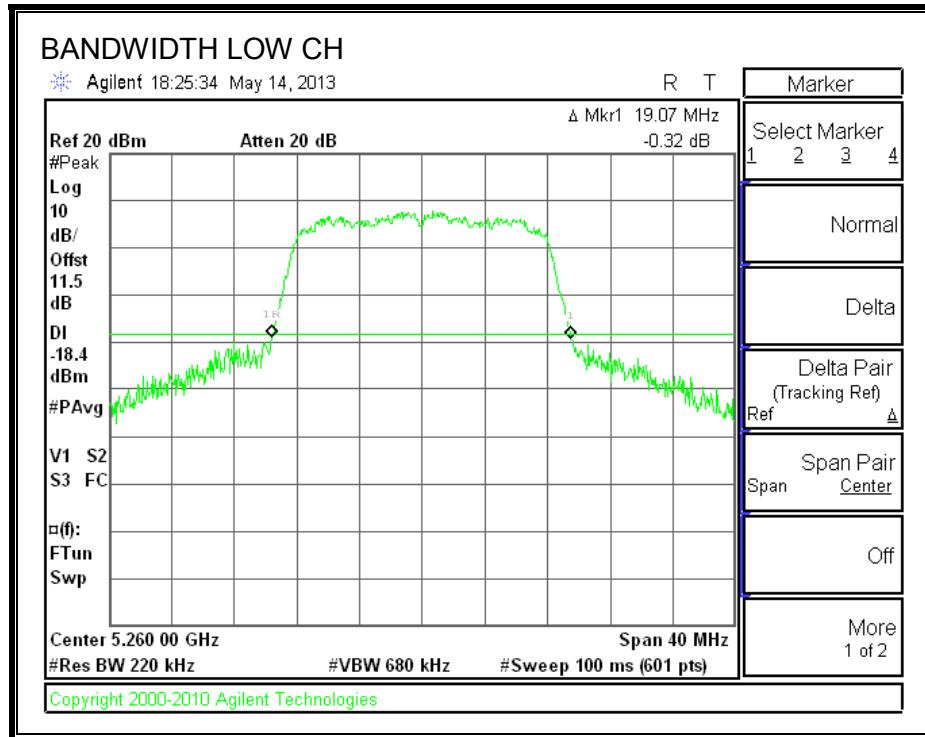

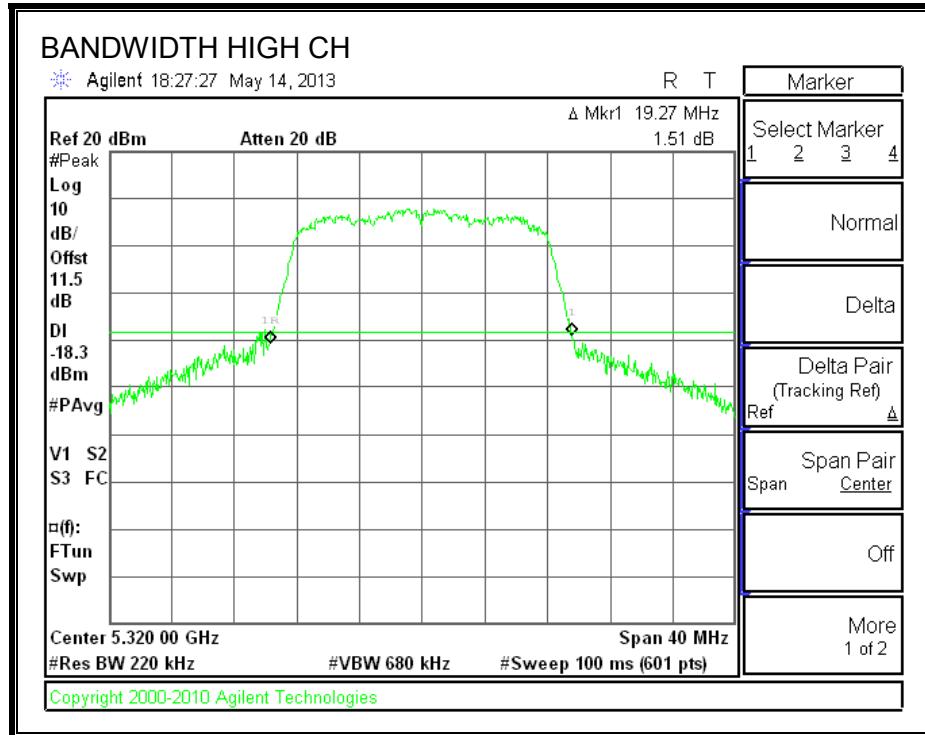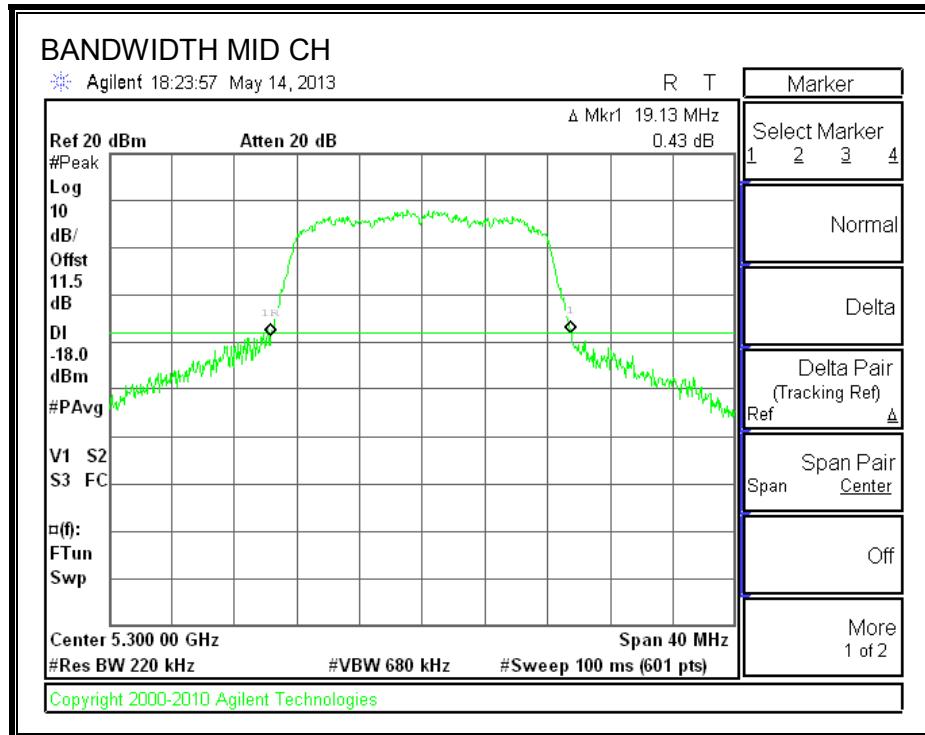

8.4.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.3332
Mid	5300	16.3261
High	5320	16.3385

99% BANDWIDTH

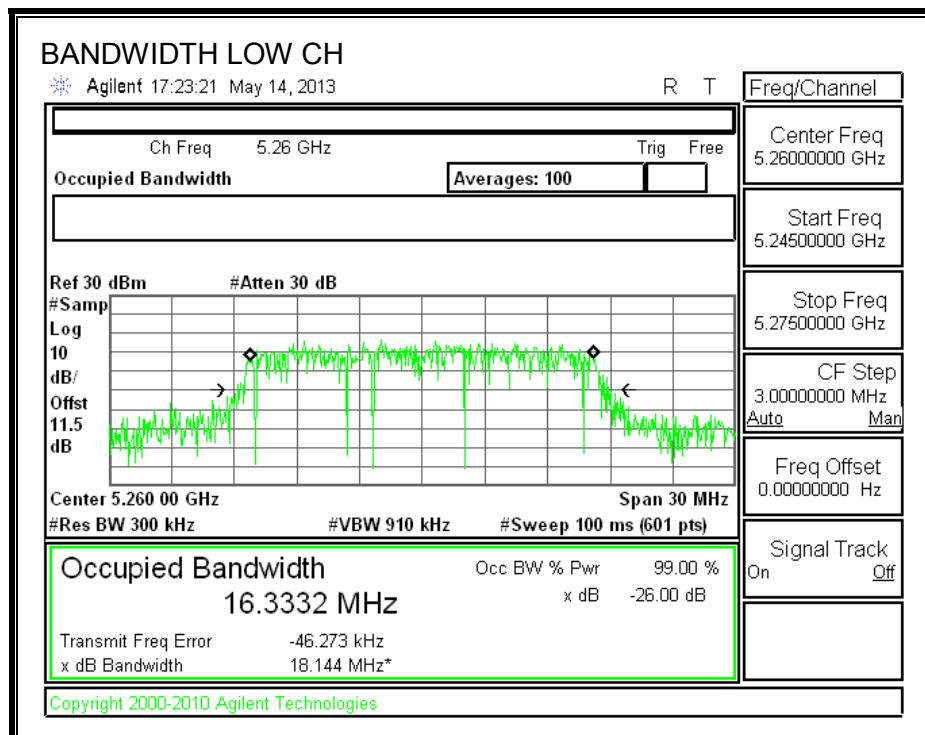

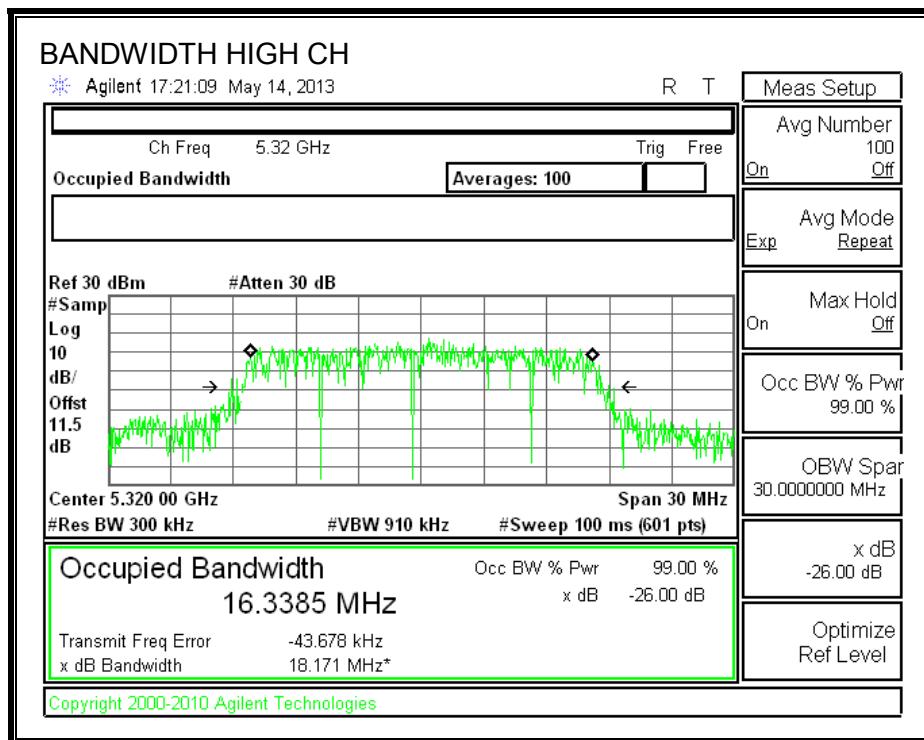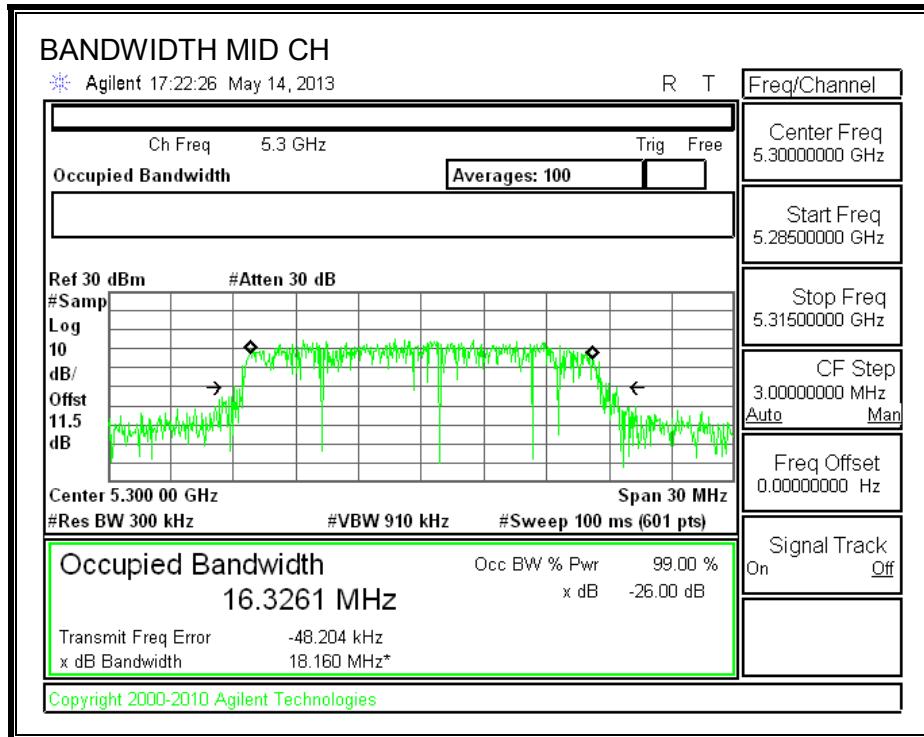

8.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	15.90
Mid	5300	15.91
High	5320	15.95

8.4.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5260	19.07	-6.00
Mid	5300	19.13	-6.00
High	5320	19.27	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5260	23.80	11.00
Mid	5300	23.82	11.00
High	5320	23.85	11.00

Duty Cycle CF (dB)	0.07	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.939	16.01	23.80	-7.79
Mid	5300	15.947	16.02	23.82	-7.80
High	5320	15.973	16.04	23.85	-7.81

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	5.603	5.67	11.00	-5.33
Mid	5300	5.600	5.67	11.00	-5.33
High	5320	5.636	5.71	11.00	-5.29

OUTPUT POWER AND PPSD

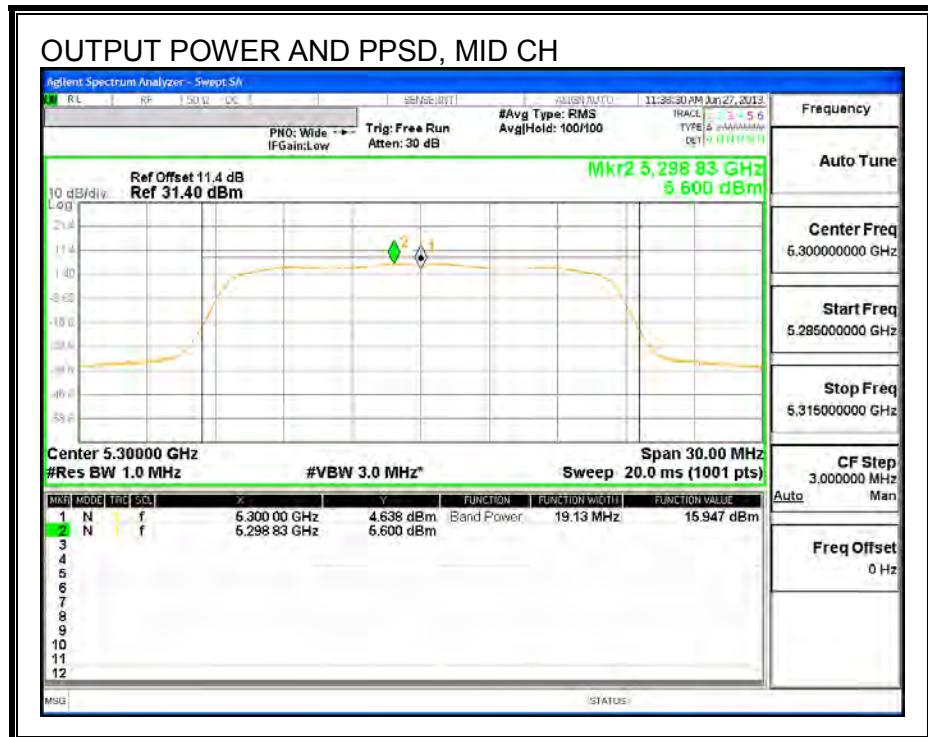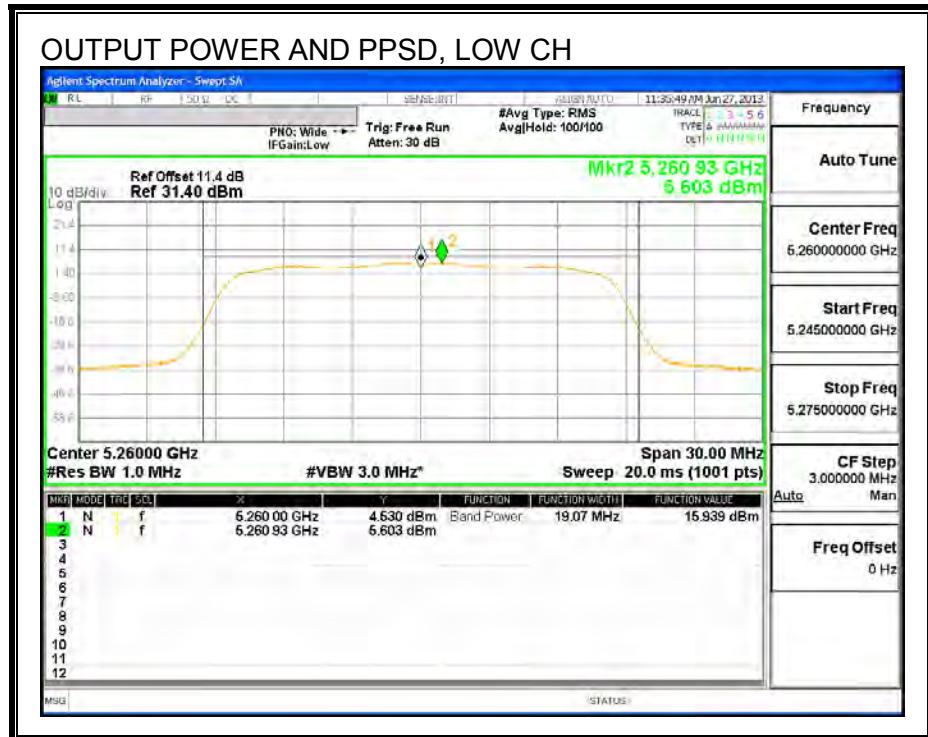

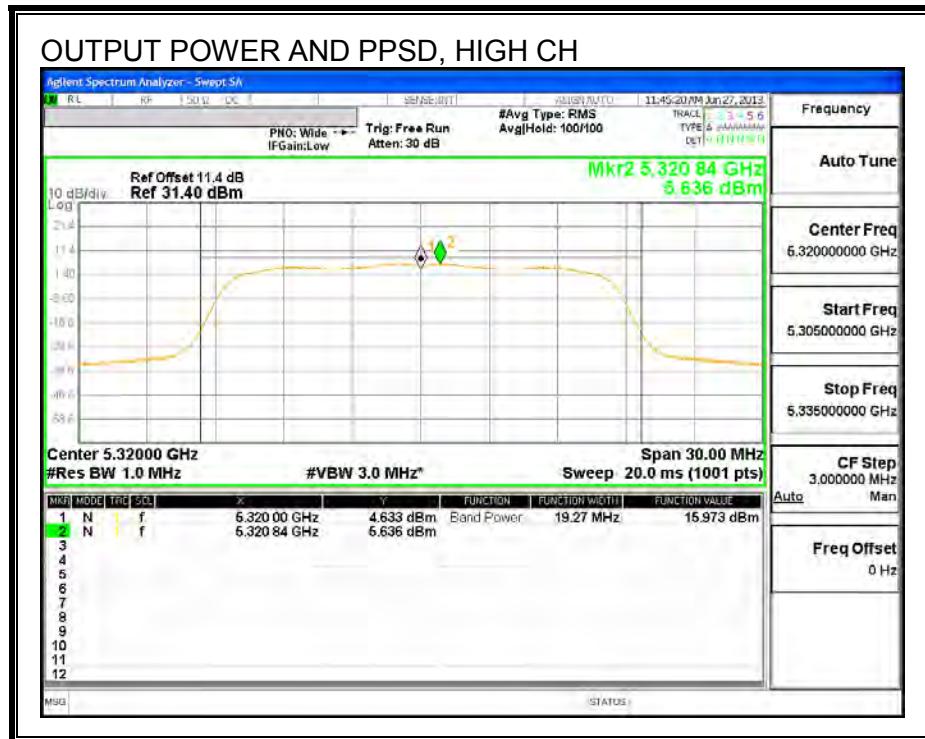

8.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND

8.5.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	19.40
Mid	5300	19.33
High	5320	19.33

26 dB BANDWIDTH

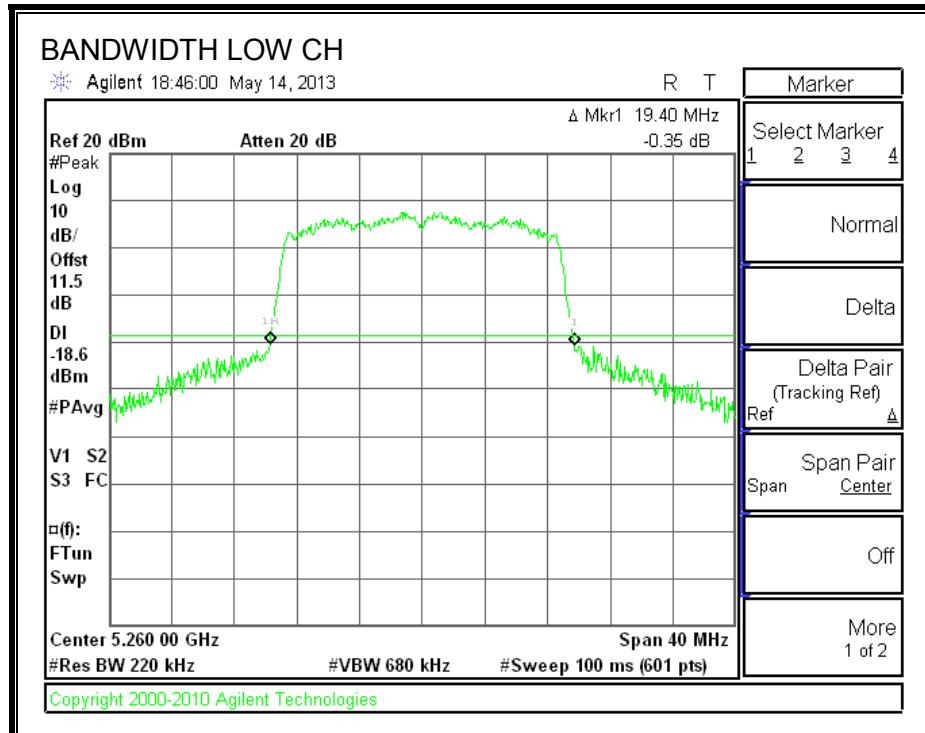

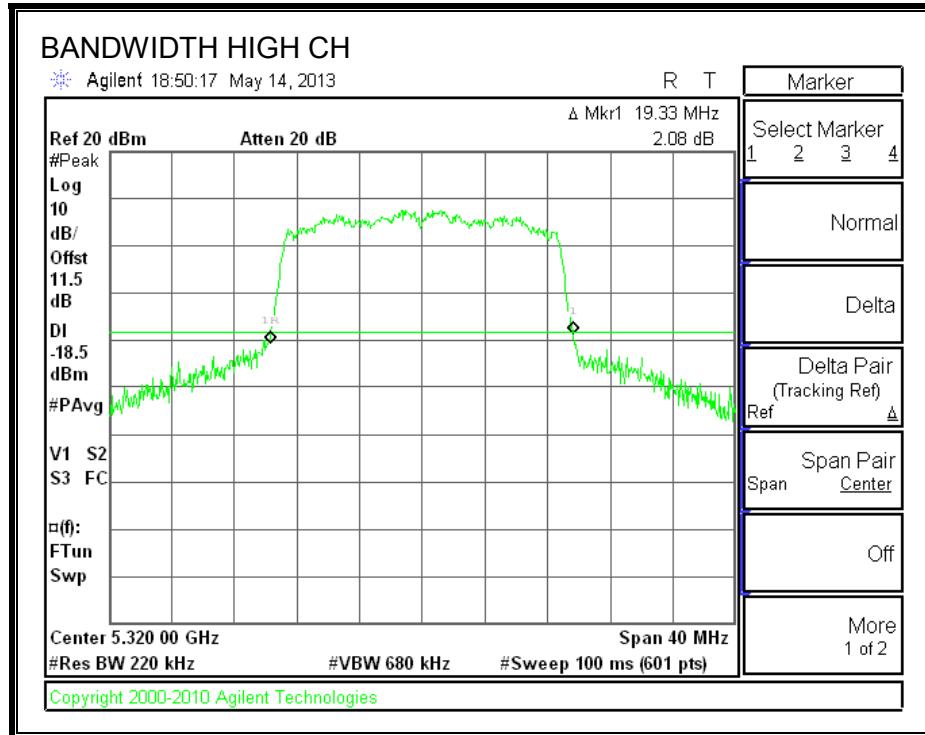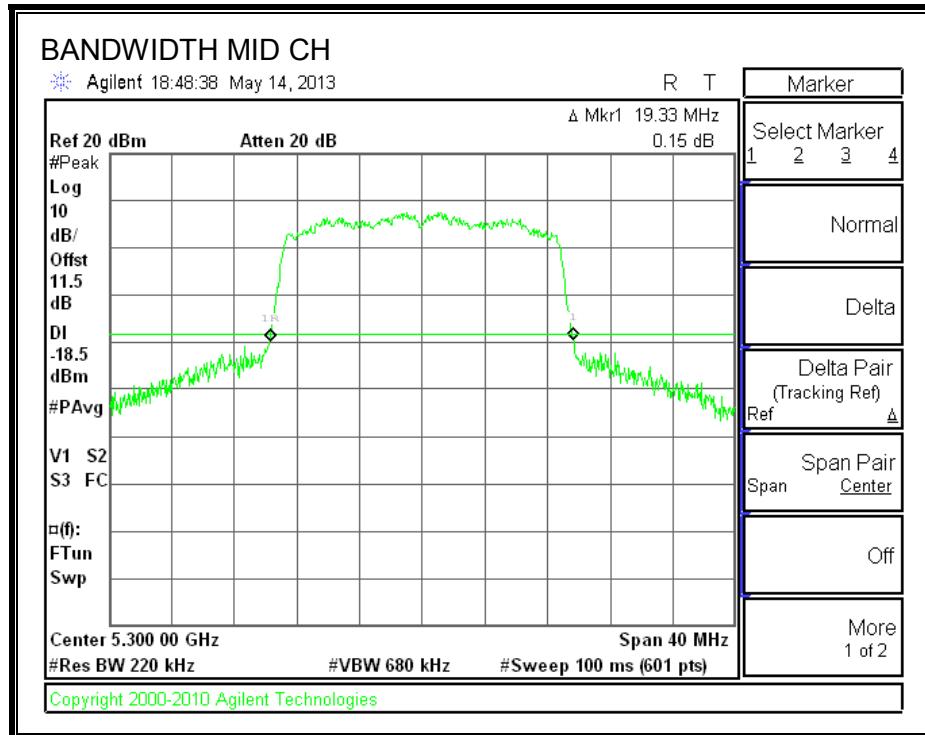

8.5.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.5130
Mid	5300	17.5206
High	5320	17.5094

99% BANDWIDTH

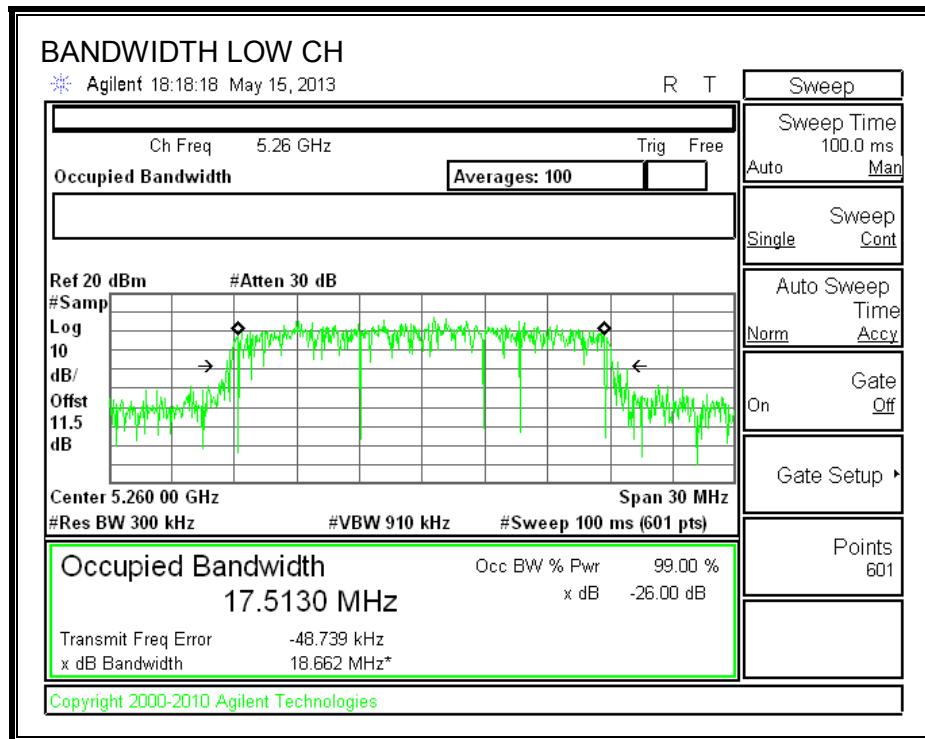

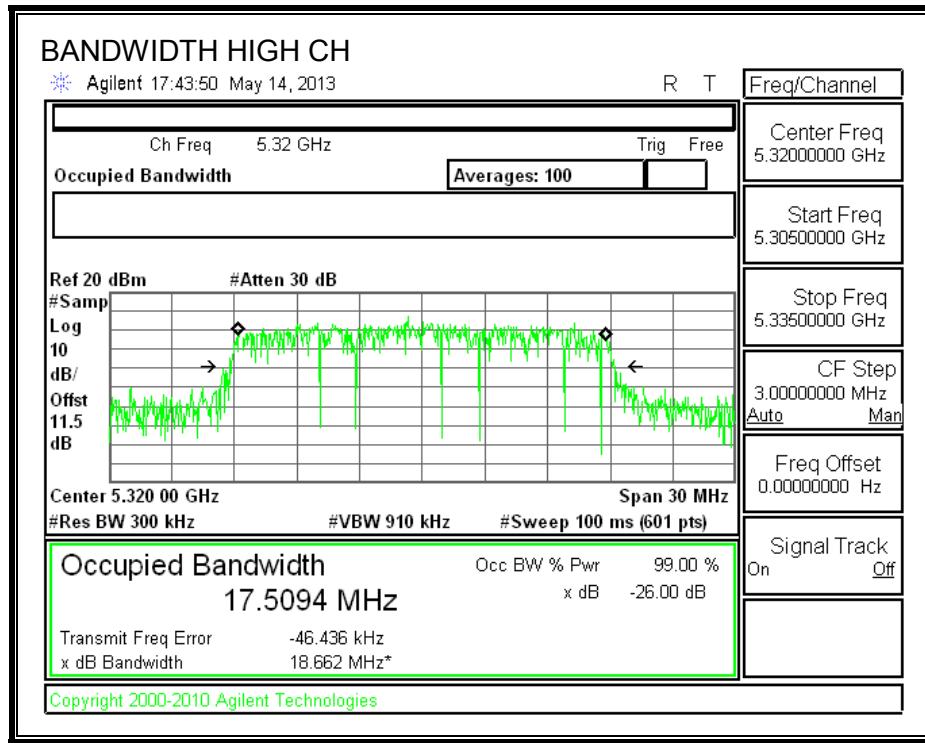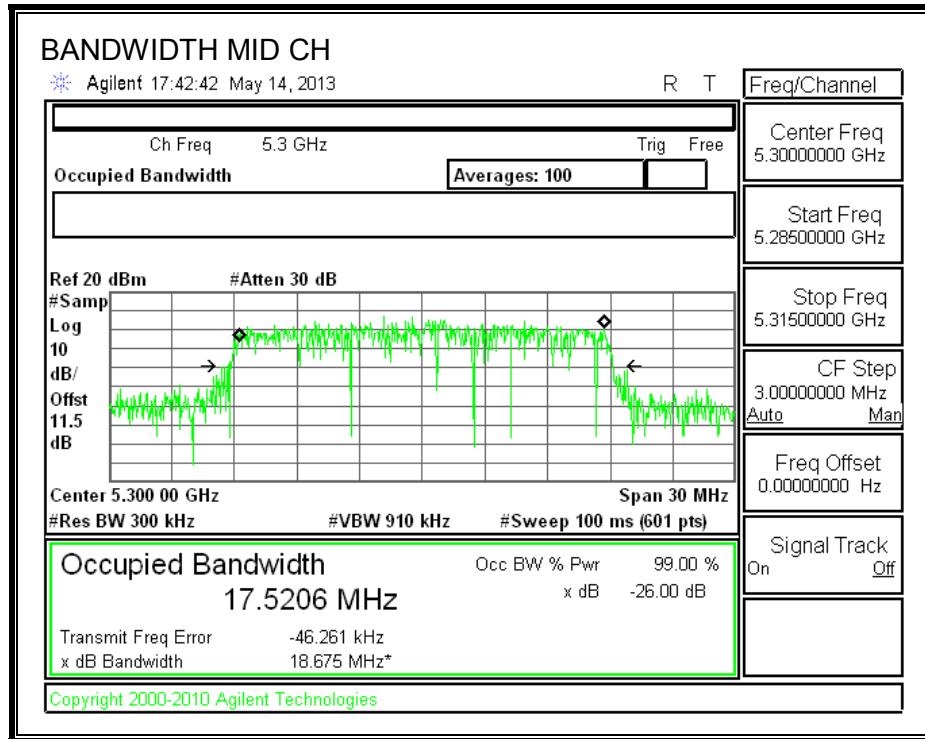

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	16.04
Mid	5300	16.00
High	5320	16.00

8.5.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Direction Gain (dBi)
Low	5260	19.40	-6.00
Mid	5300	19.33	-6.00
High	5320	19.33	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5260	23.88	11.00
Mid	5300	23.86	11.00
High	5320	23.86	11.00

Duty Cycle CF (dB)	0.07	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.178	16.25	23.88	-7.63
Mid	5300	16.183	16.25	23.86	-7.61
High	5320	16.048	16.12	23.86	-7.74

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	5.637	5.71	11.00	-5.29
Mid	5300	5.658	5.73	11.00	-5.27
High	5320	5.547	5.62	11.00	-5.38

OUTPUT POWER AND PPSD

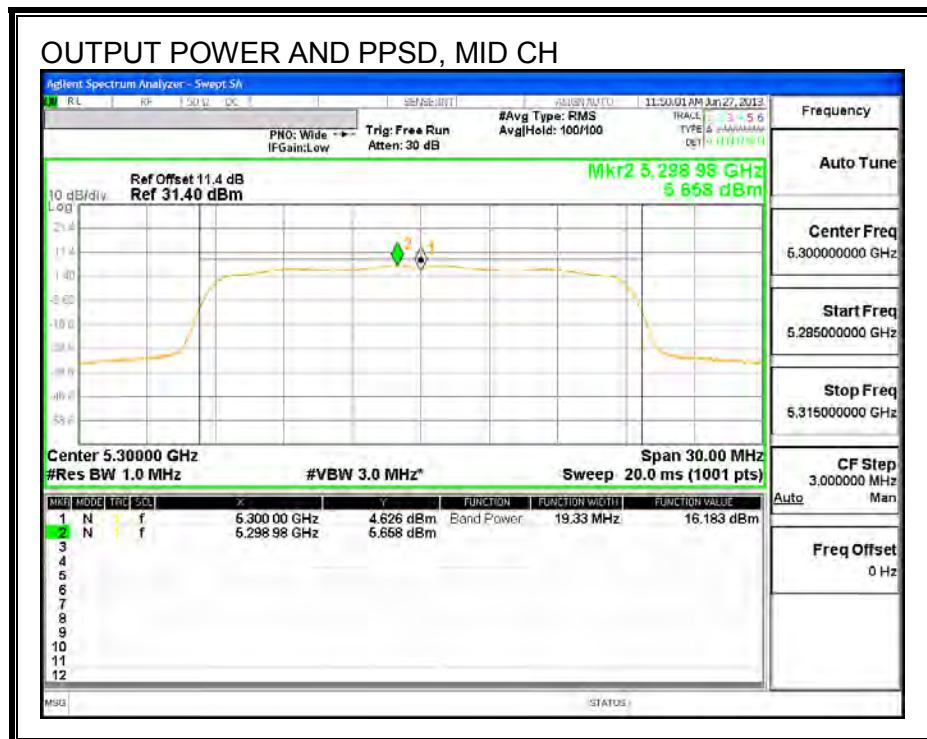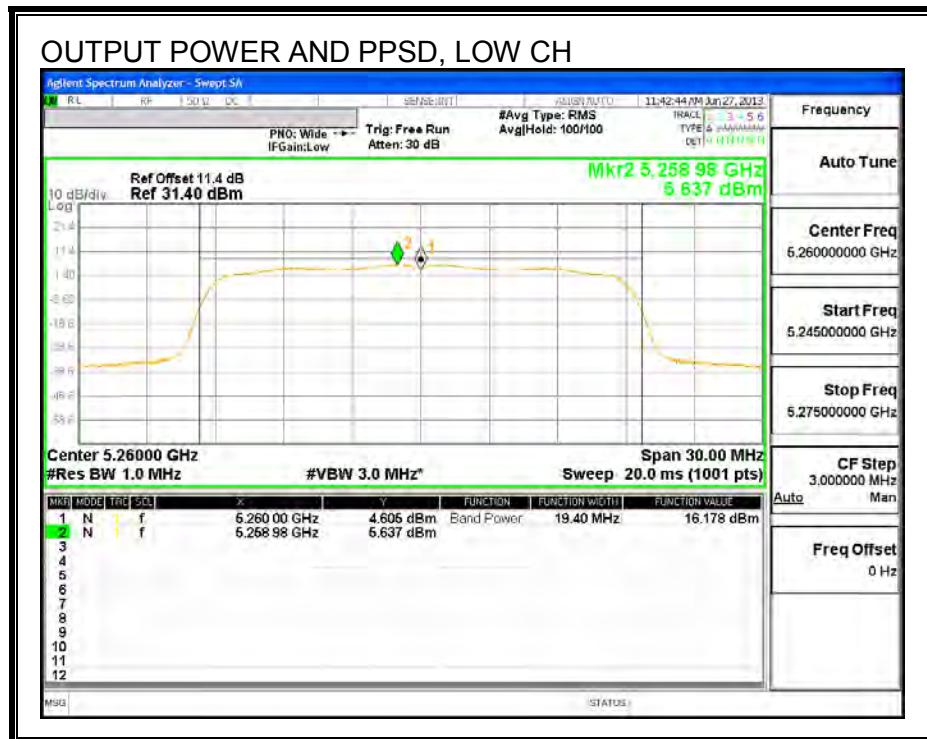

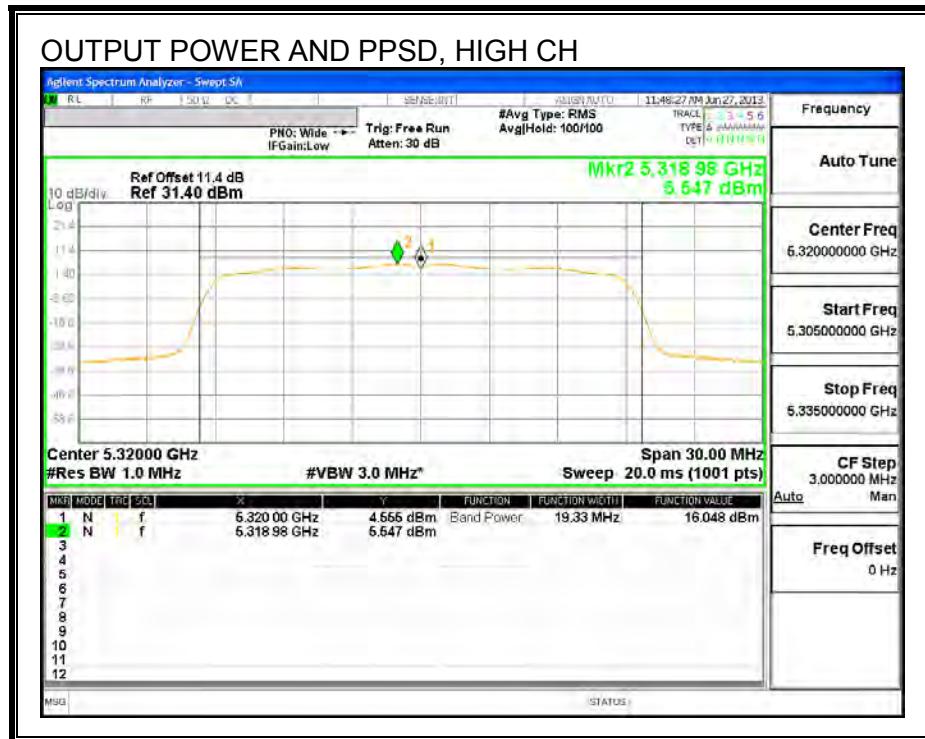

8.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND

8.6.1. 26 dB BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	44.13
High	5310	44.00

26 dB BANDWIDTH

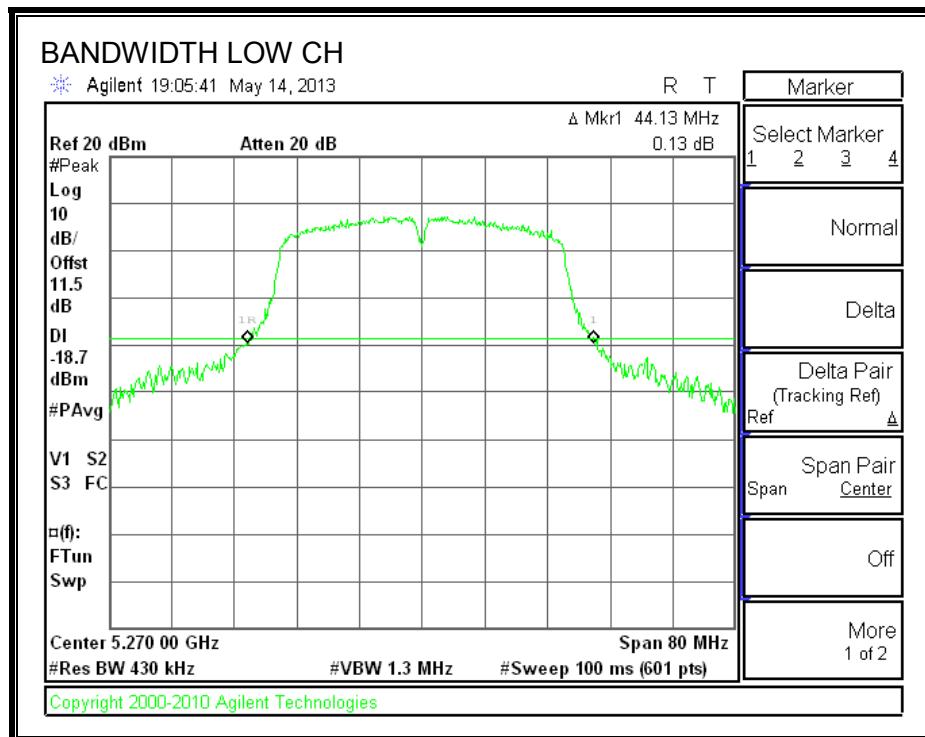

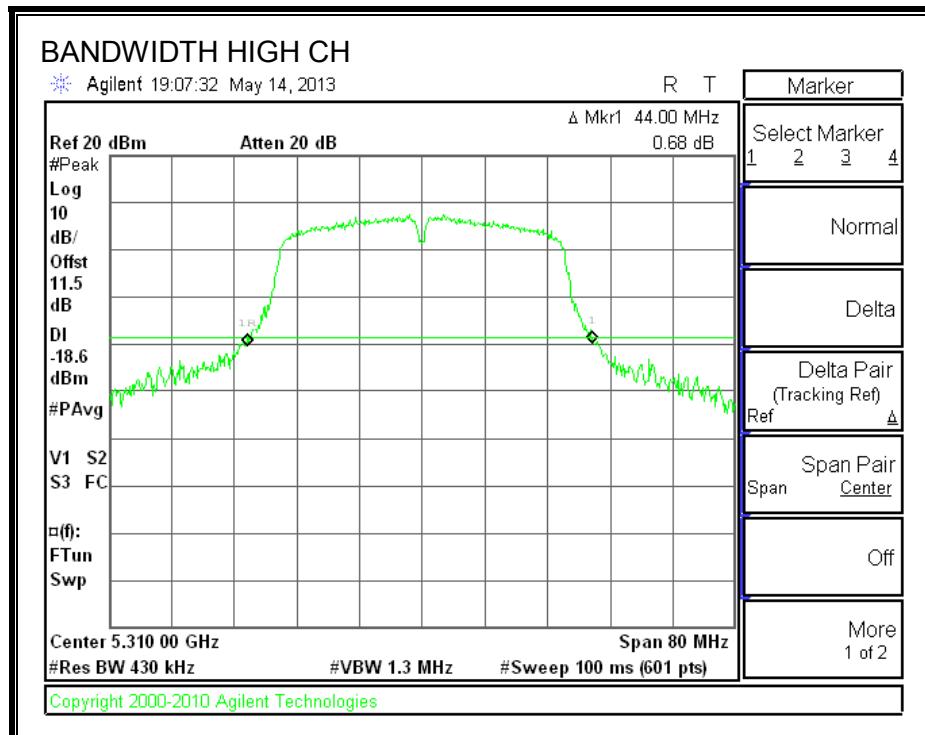

8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	35.7858
High	5310	35.7715

99% BANDWIDTH

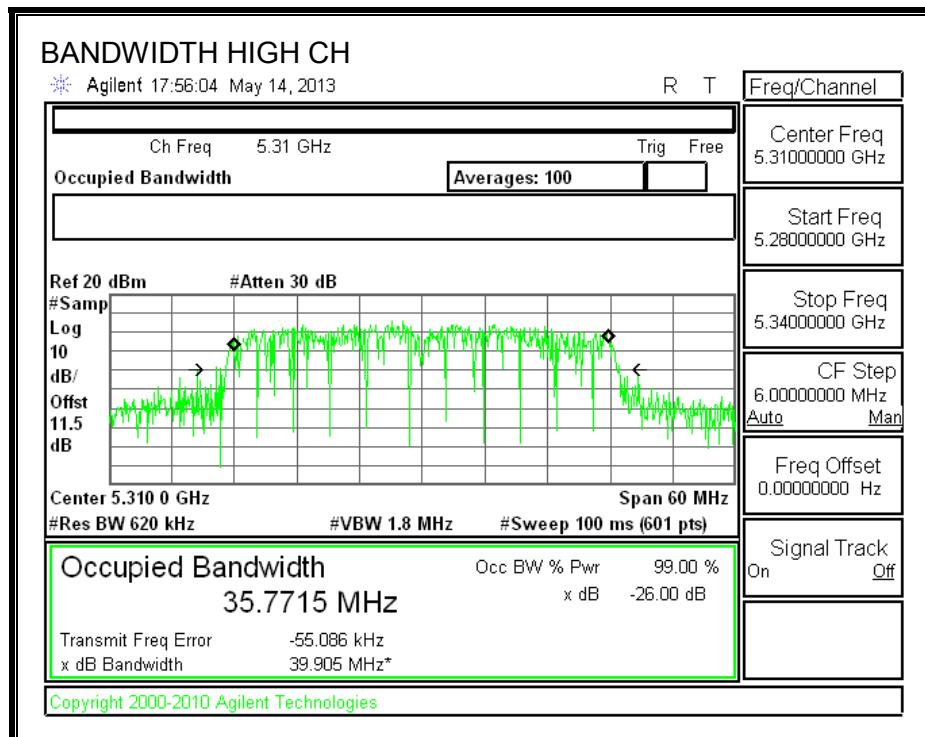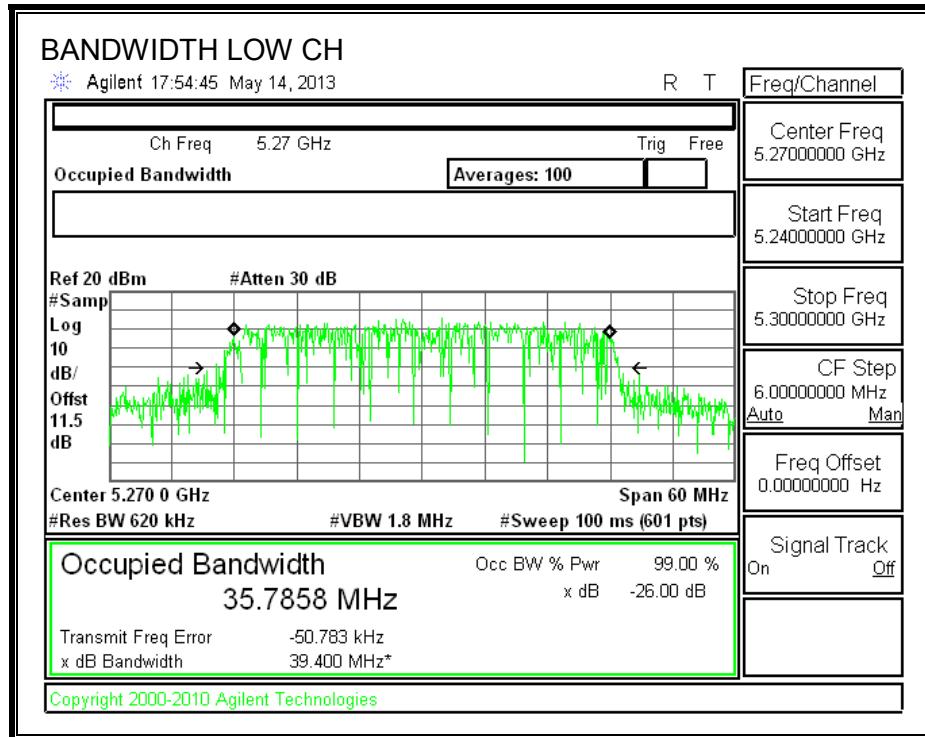

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	15.99
High	5310	15.94

8.6.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Direction Gain (dBi)
Low	5270	44.13	-6.00
High	5310	44.00	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5270	24.00	11.00
High	5310	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	16.120	16.28	24.00	-7.72
High	5310	15.900	16.06	24.00	-7.94

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5270	2.372	2.53	11.00	-8.47
High	5310	2.050	2.21	11.00	-8.79

OUTPUT POWER AND PPSD,

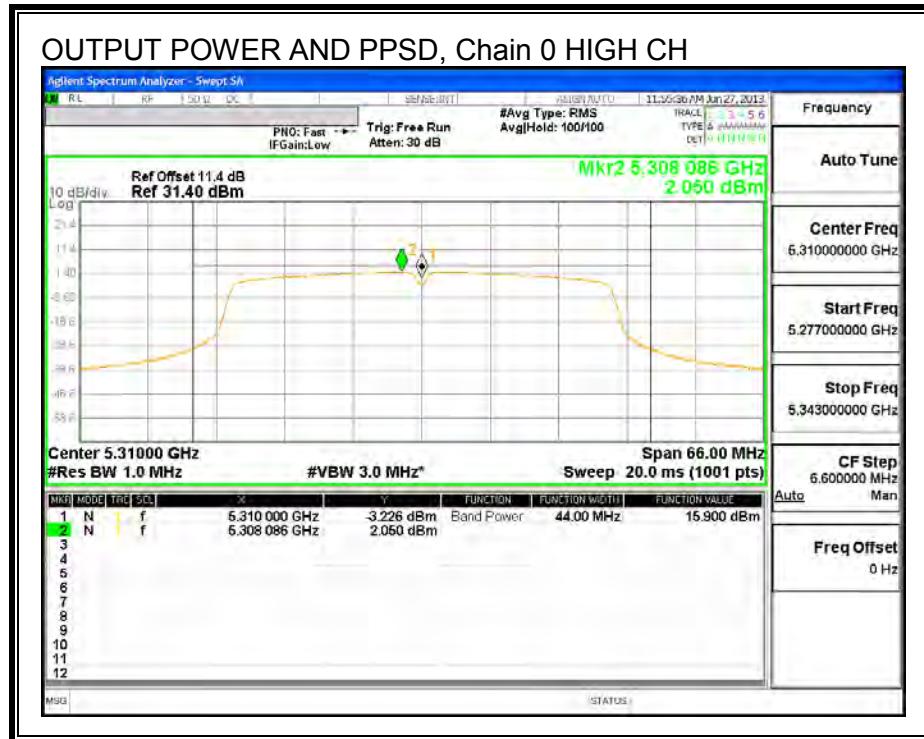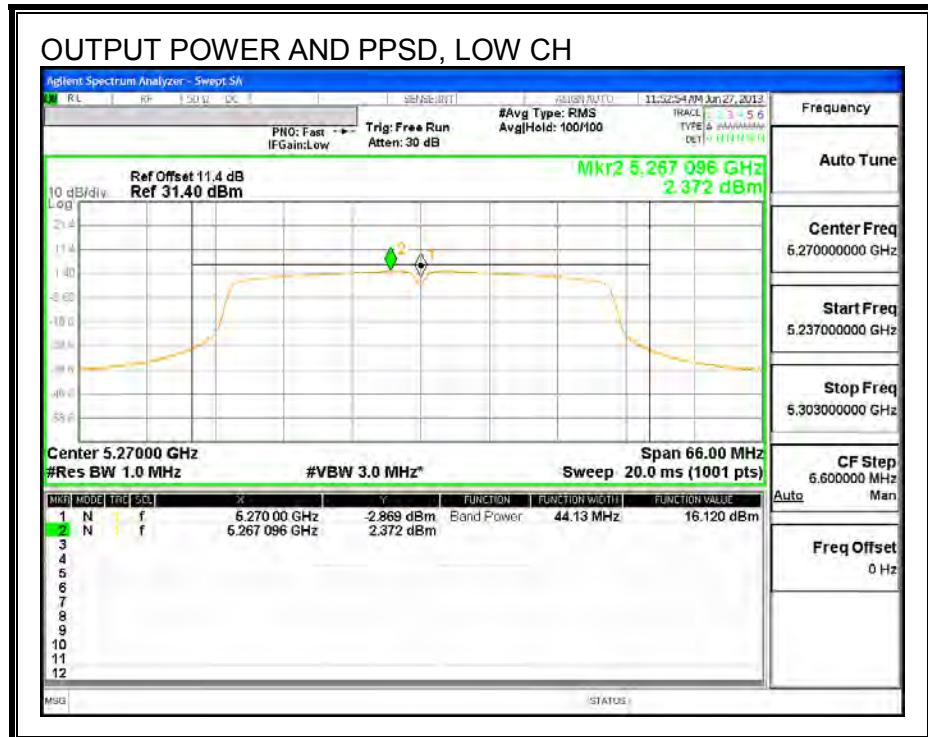

8.7. 802.11a MODE IN THE 5.6 GHz BAND

8.7.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	19.60
Mid	5580	19.67
High	5700	19.80

26 dB BANDWIDTH

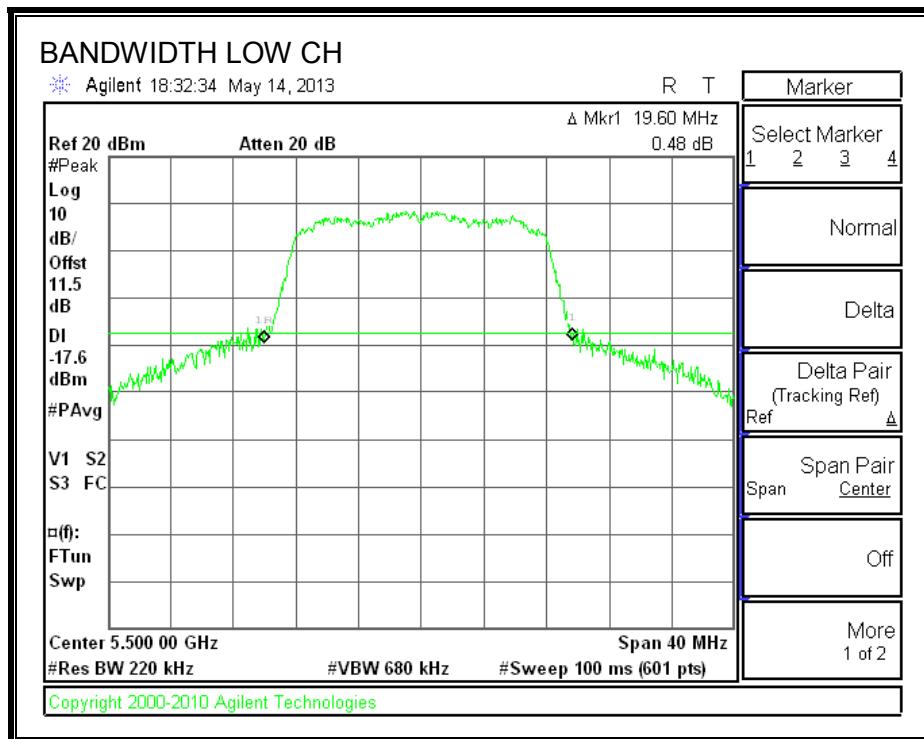

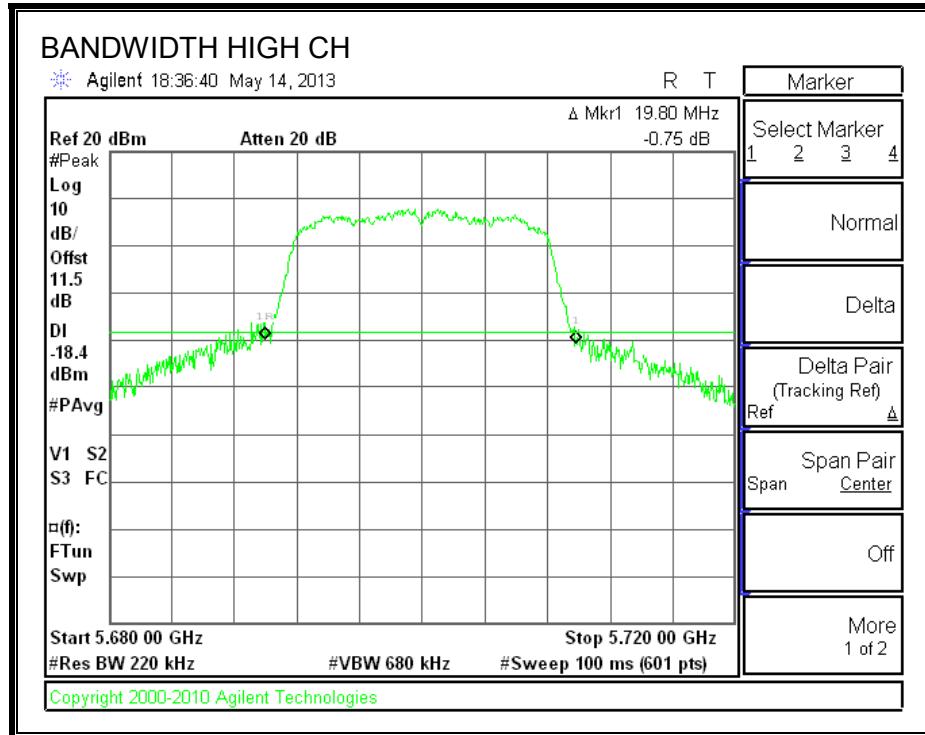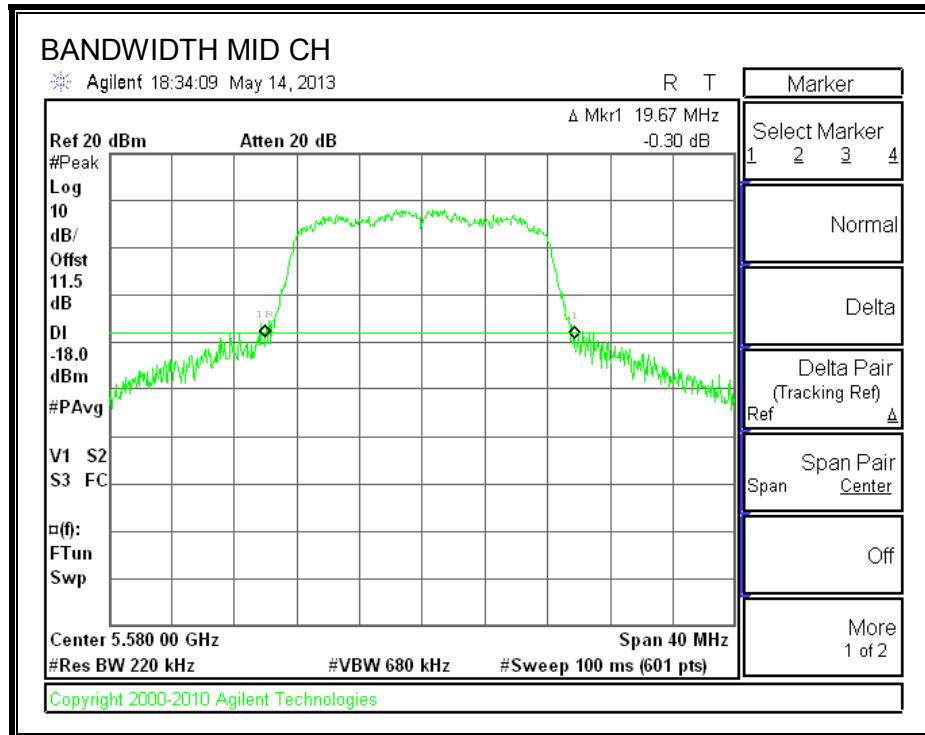

8.7.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.3272
Mid	5580	16.3301
High	5700	16.3314

99% BANDWIDTH

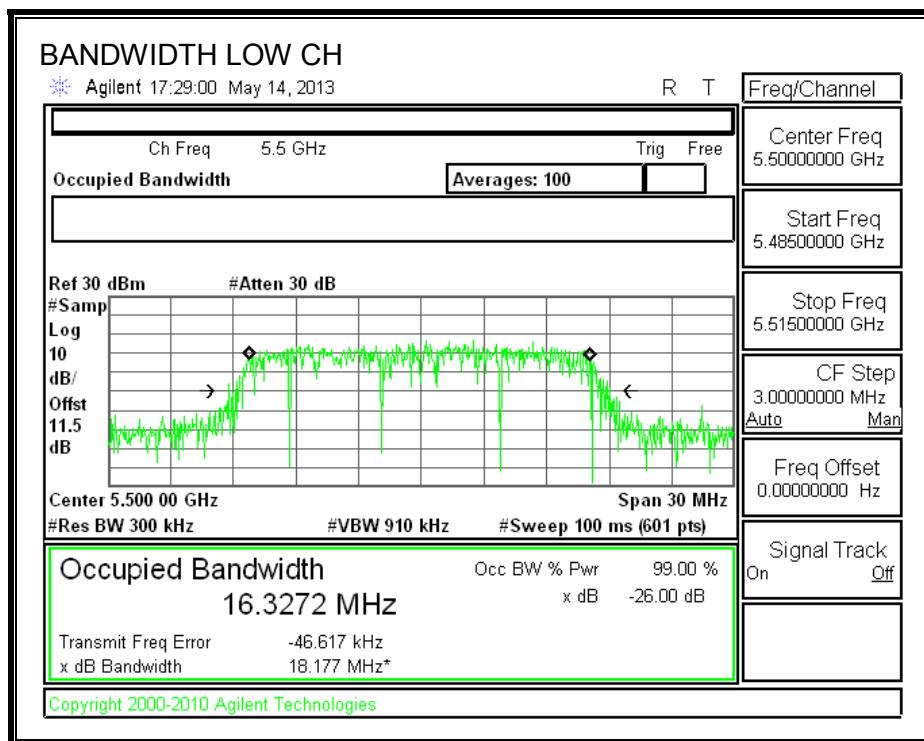

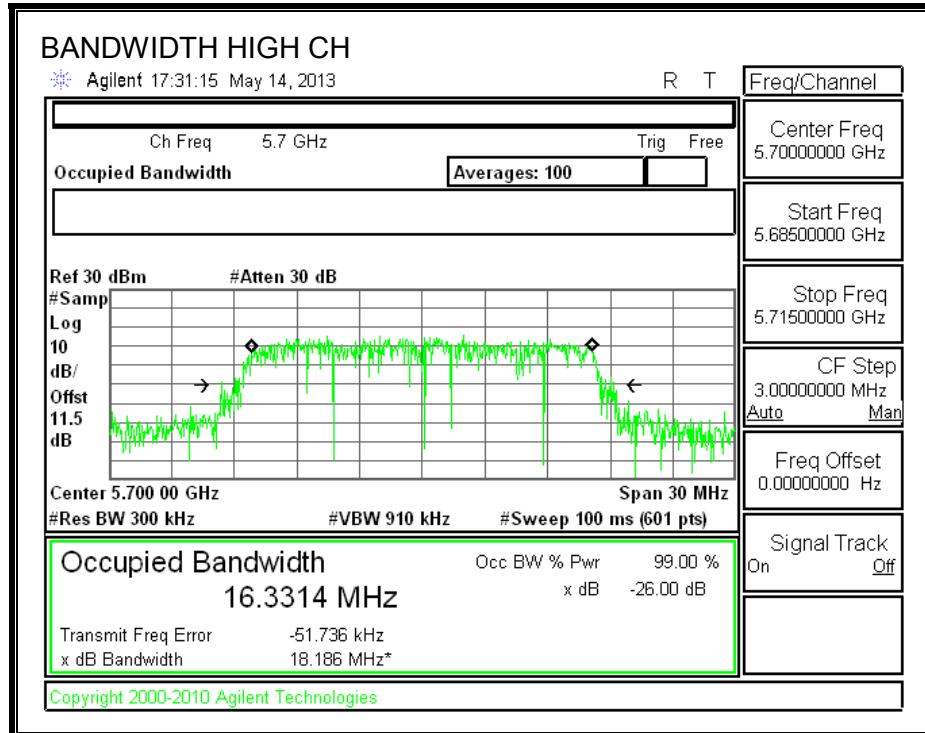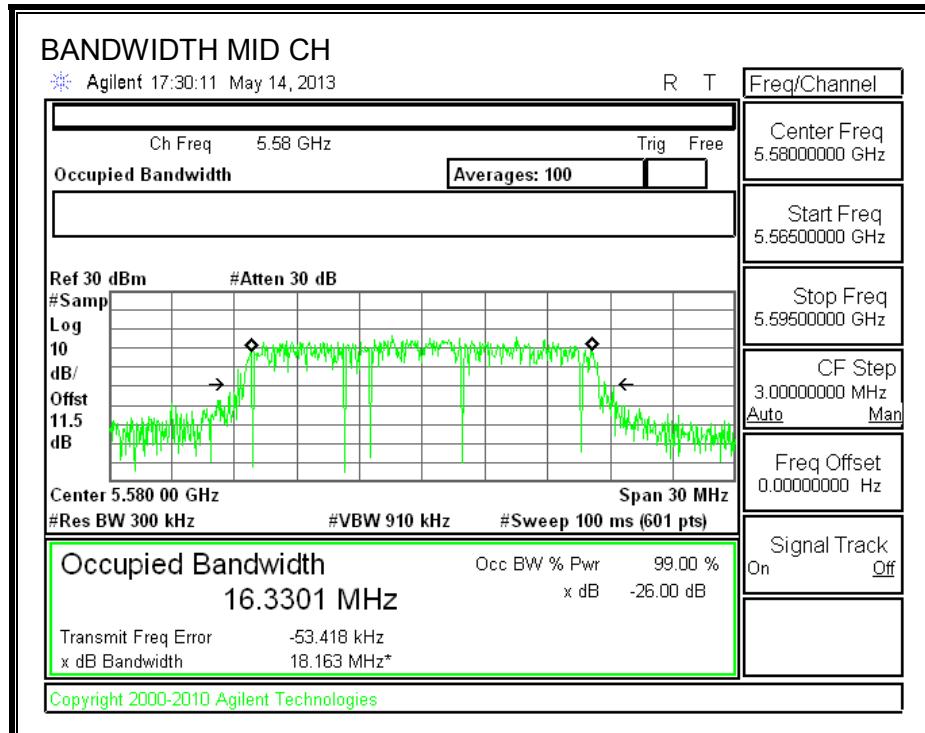

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	14.00
Mid	5580	13.95
High	5700	13.92

8.7.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Direction Gain (dBi)
Low	5500	19.60	-5.50
Mid	5580	19.67	-5.50
High	5700	19.80	-5.50

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5500	23.92	11.00
Mid	5580	23.94	11.00
High	5700	23.97	11.00

Duty Cycle CF (dB)	0.07	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	14.106	14.18	23.92	-9.75
Mid	5580	13.989	14.06	23.94	-9.88
High	5700	13.948	14.02	23.97	-9.95

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	3.752	3.82	11.00	-7.18
Mid	5580	3.669	3.74	11.00	-7.26
High	5700	3.626	3.70	11.00	-7.30

OUTPUT POWER AND PPSD

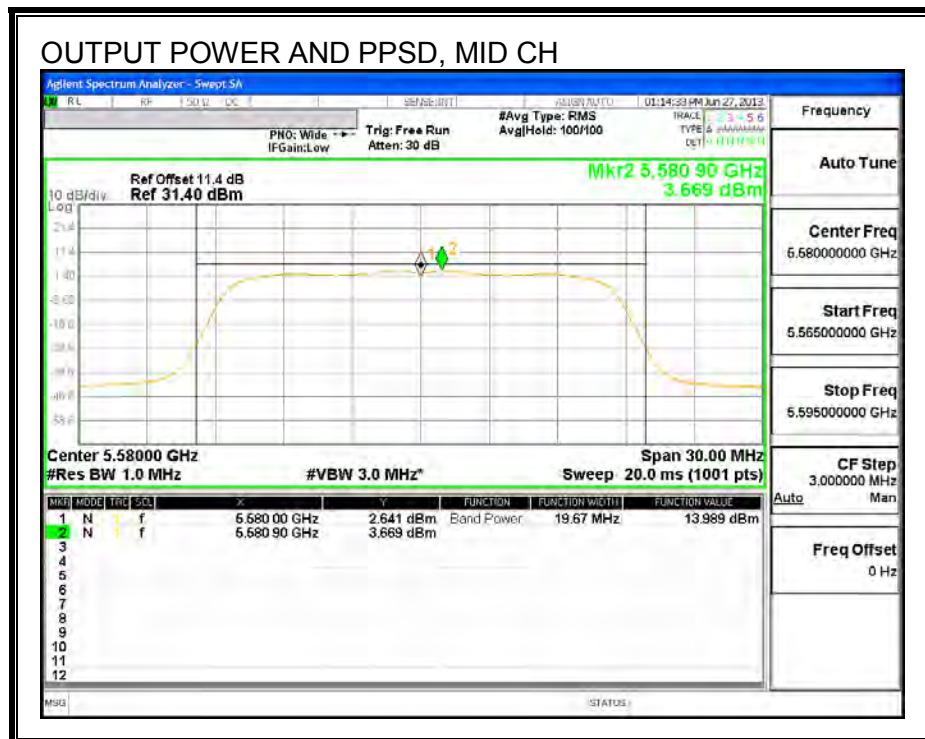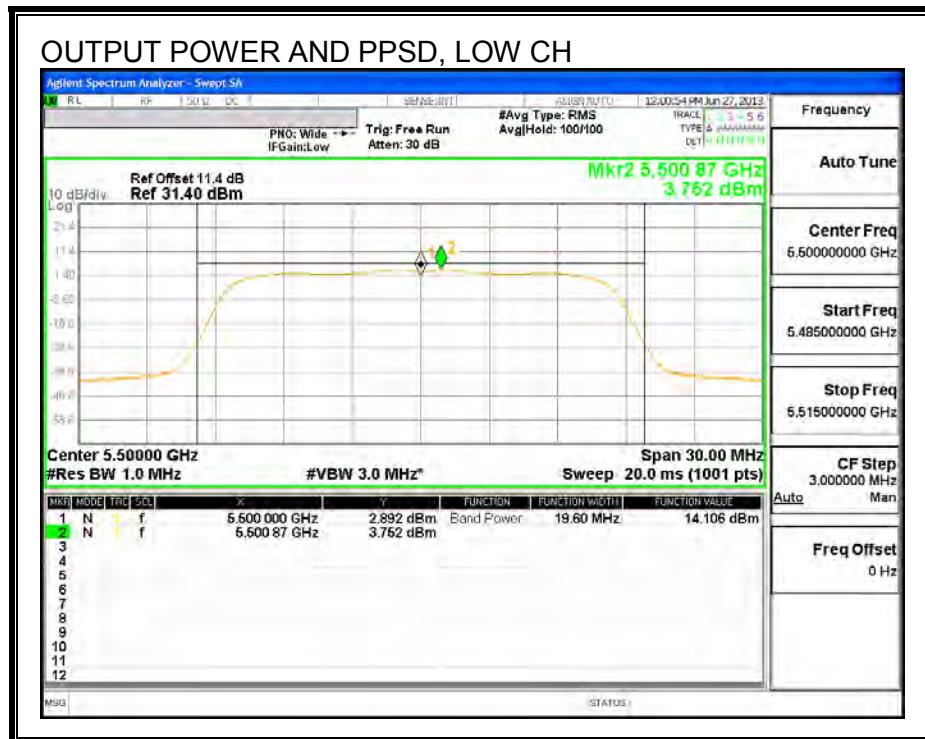

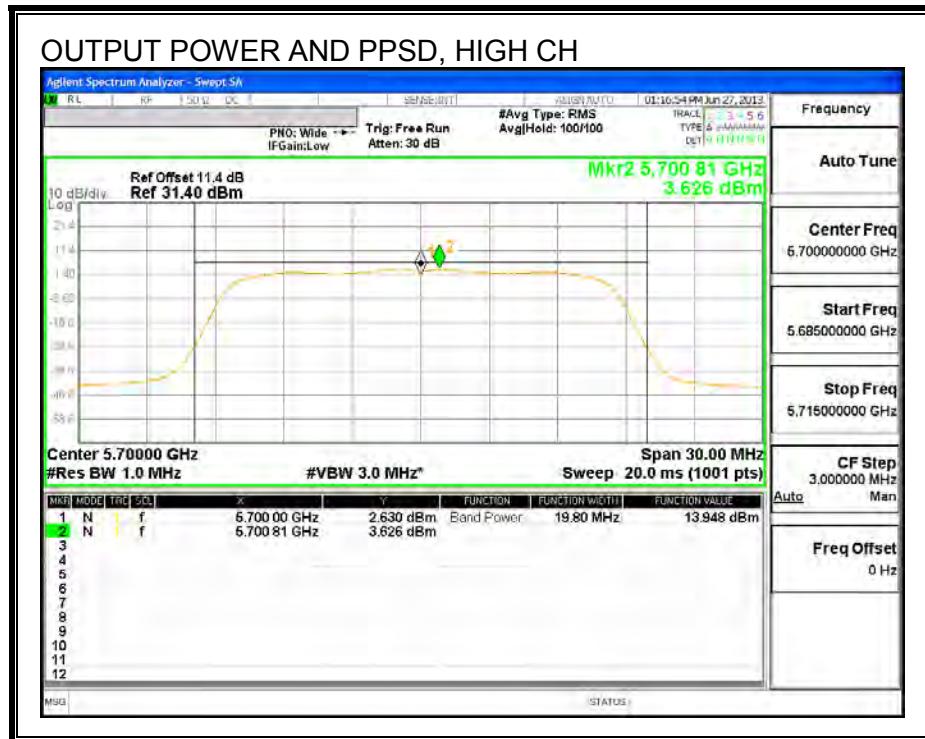

8.8. 802.11n HT20 MODE IN THE 5.6 GHz BAND

8.8.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	19.33
Mid	5580	19.47
High	5700	19.33

26 dB BANDWIDTH

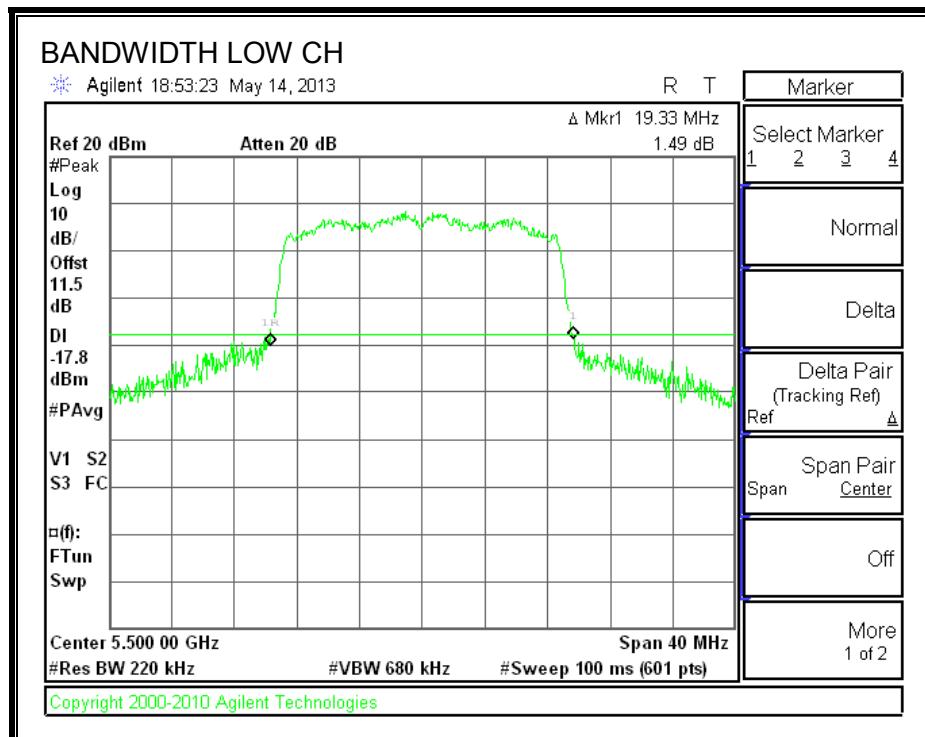

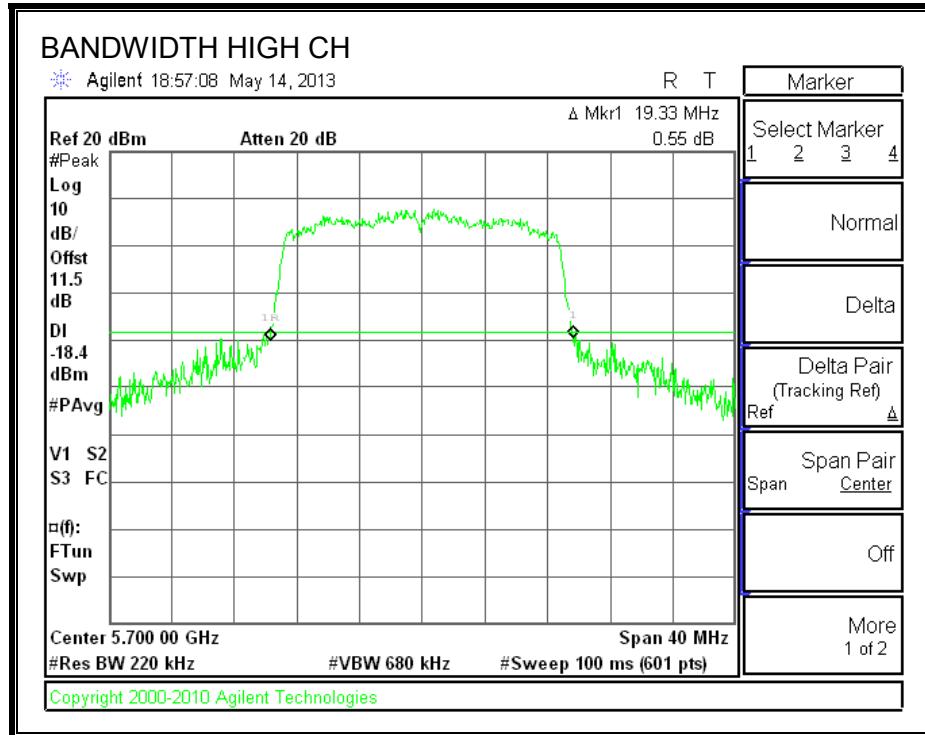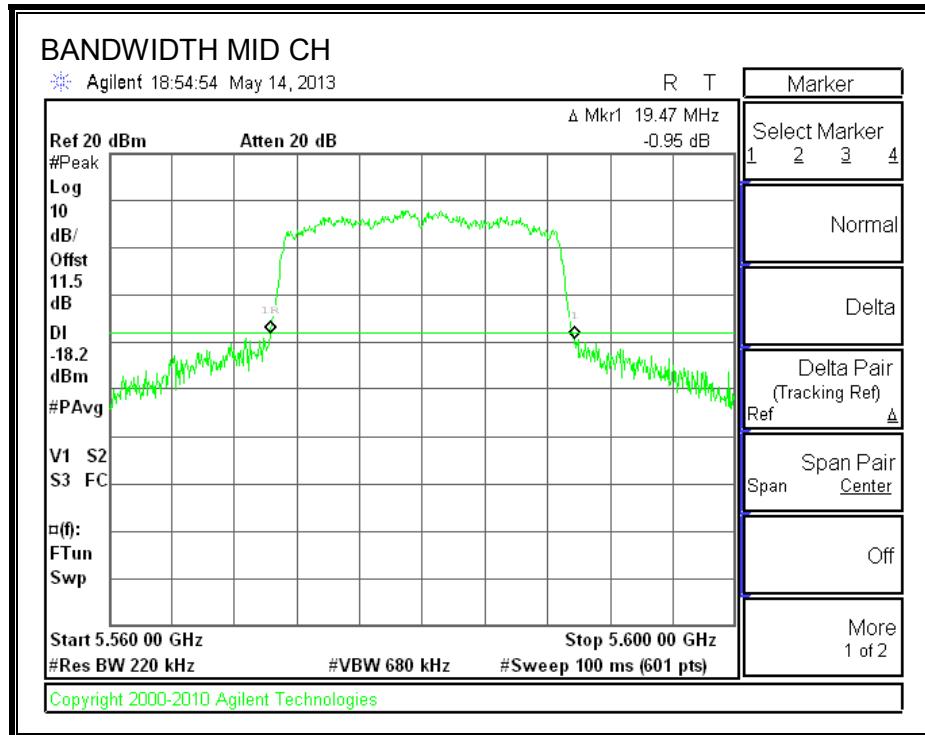

8.8.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.5224
Mid	5580	17.5123
High	5700	17.5155

99% BANDWIDTH

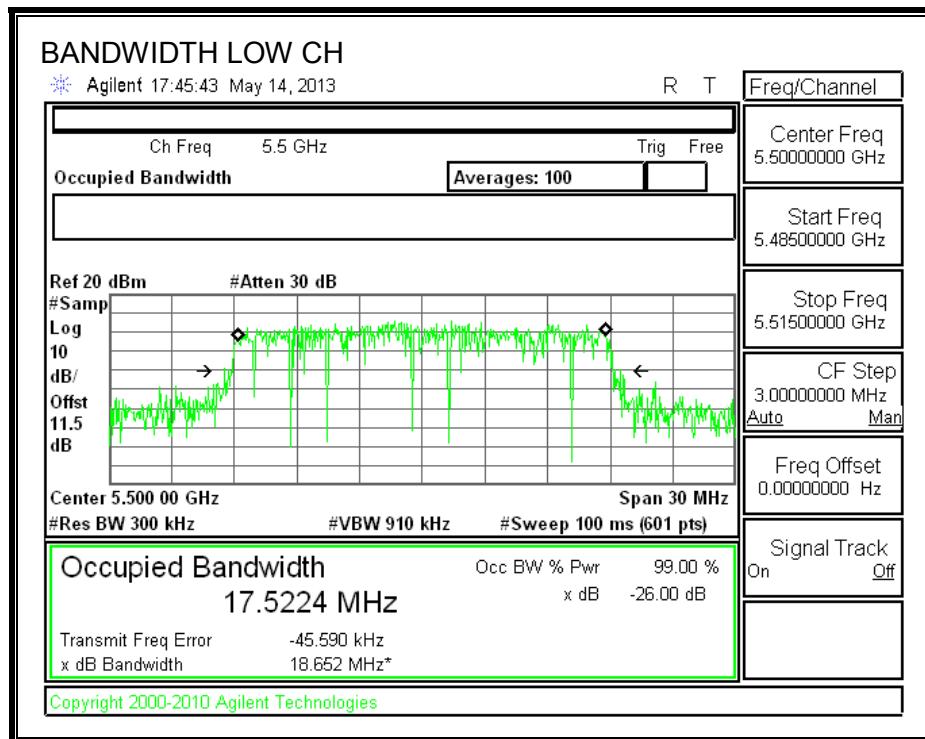

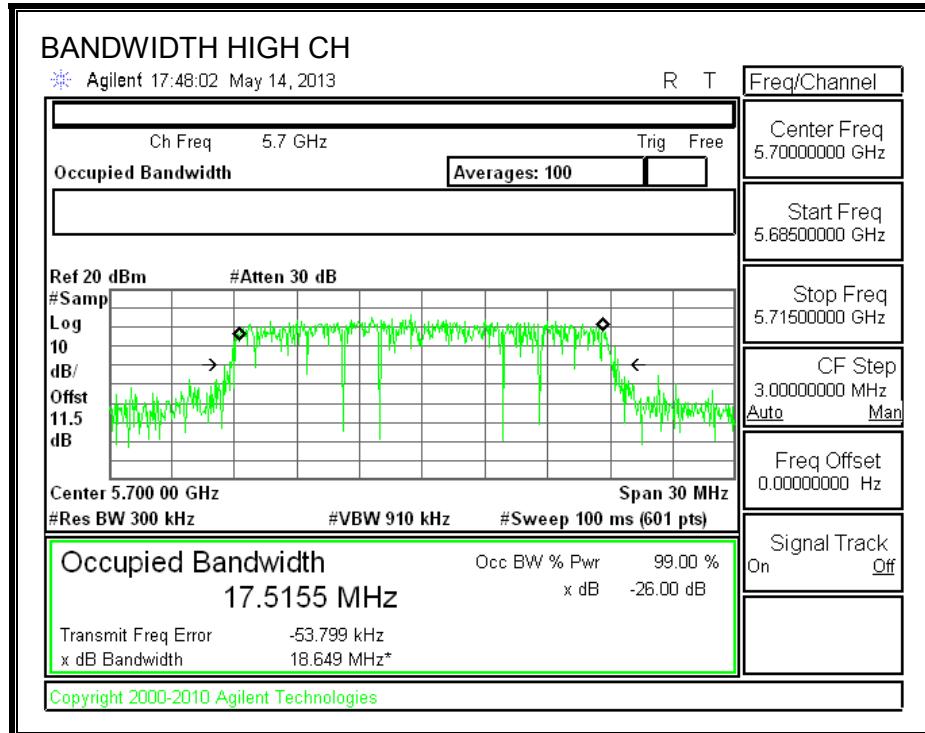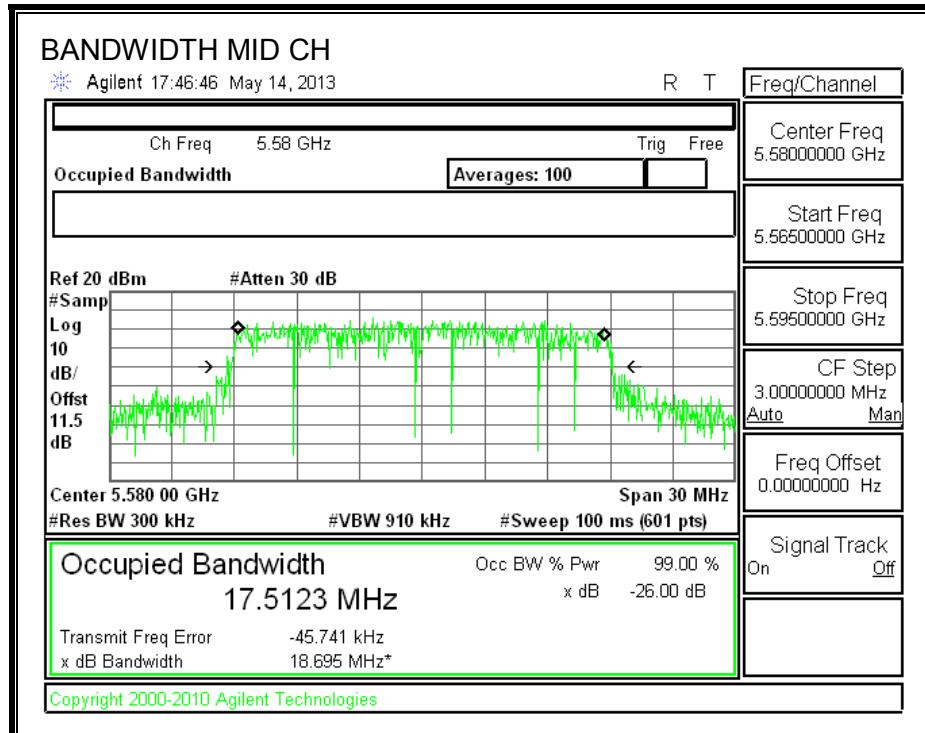

8.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	13.95
Mid	5580	14.00
High	5700	14.00

8.8.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5500	19.33	-5.50
Mid	5580	19.47	-5.50
High	5700	19.33	-5.50

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5500	23.86	11.00
Mid	5580	23.89	11.00
High	5700	23.86	11.00

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.978	14.07	23.86	-9.79
Mid	5580	14.138	14.23	23.89	-9.67
High	5700	14.116	14.21	23.86	-9.66

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	3.457	3.55	11.00	-7.45
Mid	5580	3.604	3.69	11.00	-7.31
High	5700	3.593	3.68	11.00	-7.32

OUTPUT POWER AND PPSD

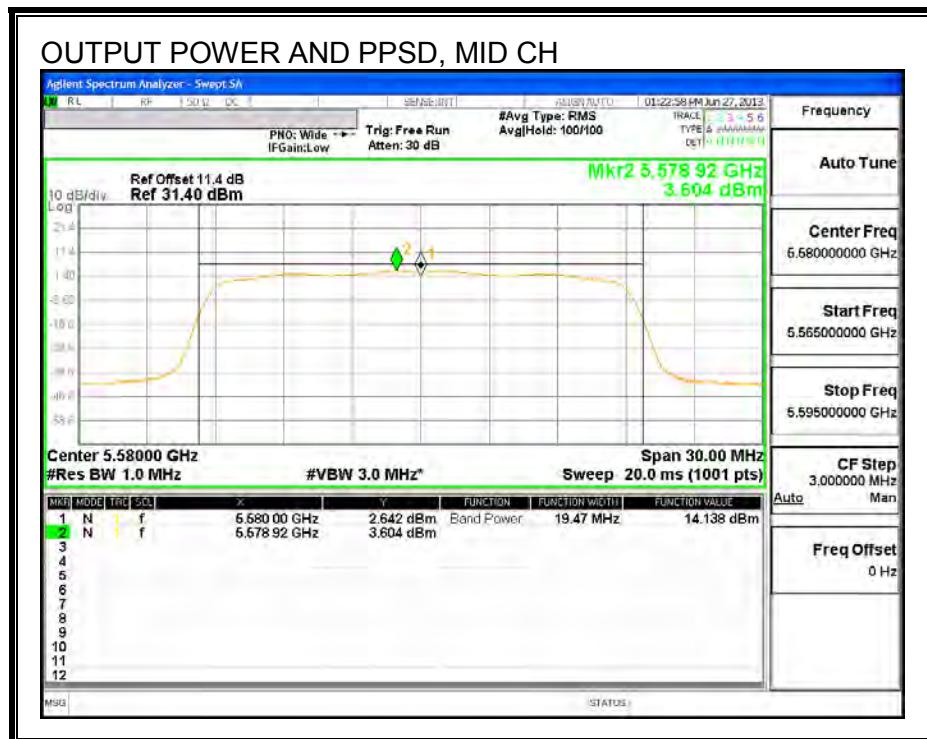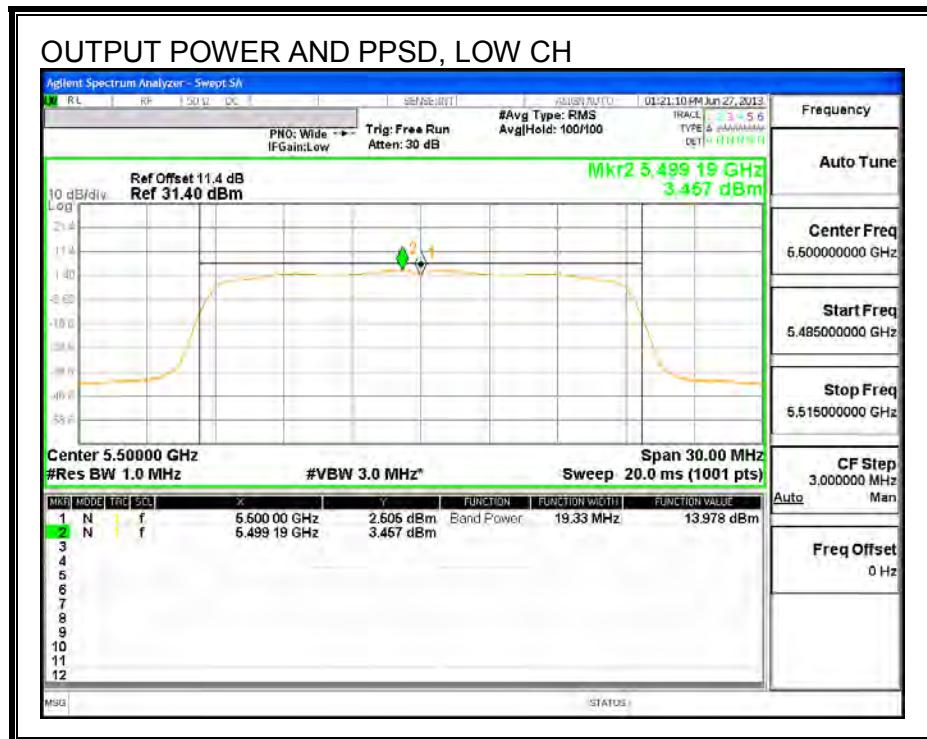

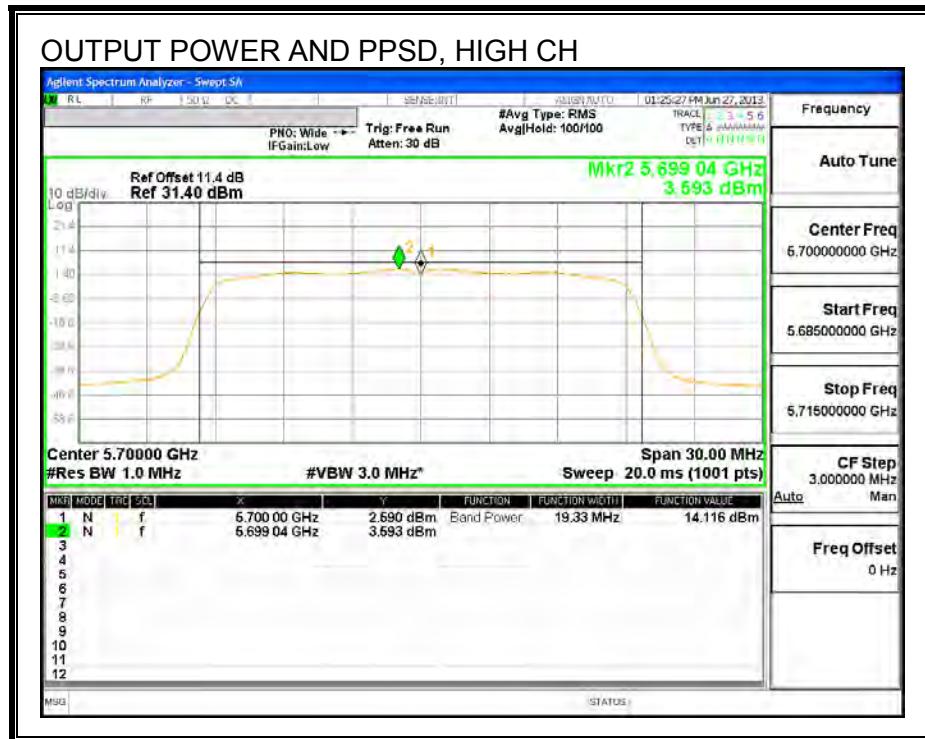

8.9. 802.11n HT40 MODE IN THE 5.6 GHz BAND

8.9.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	44.00
Mid	5550	44.67
High	5670	44.80

26 dB BANDWIDTH

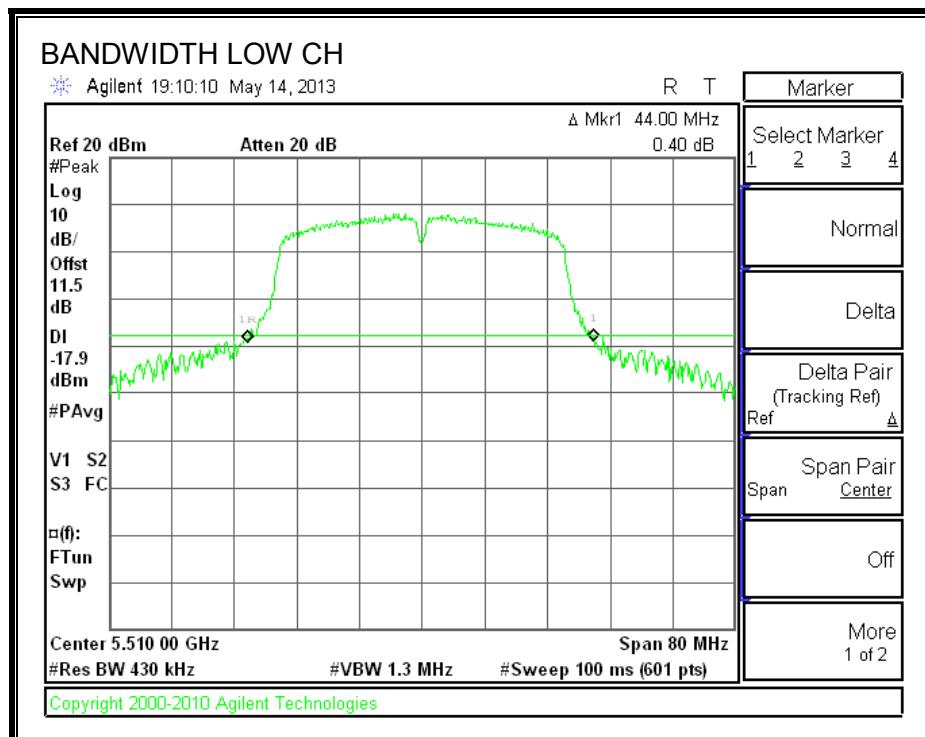

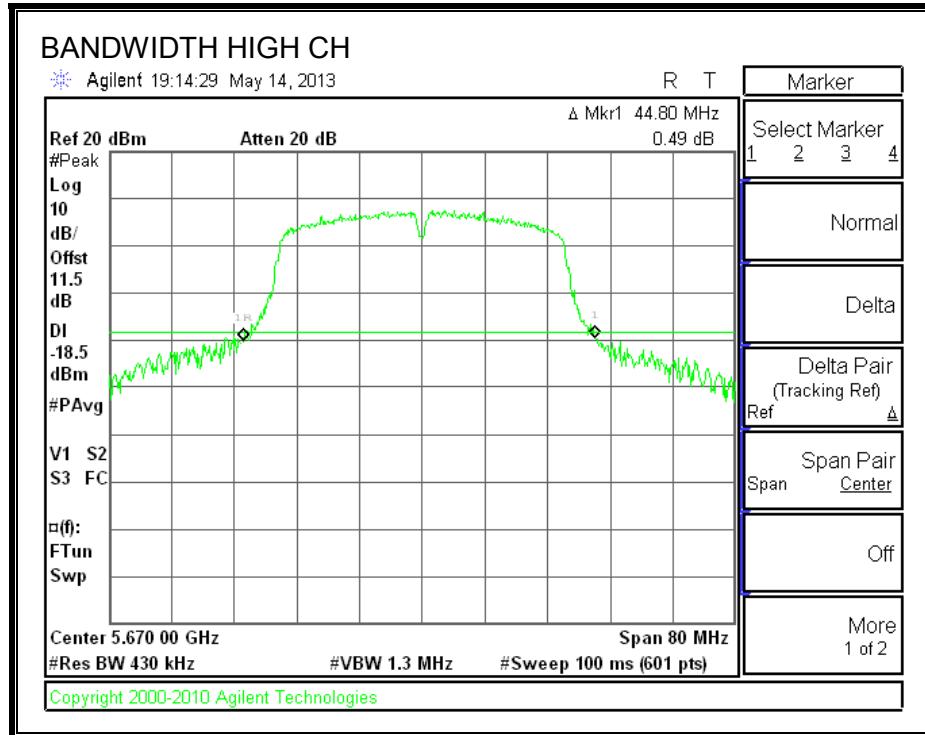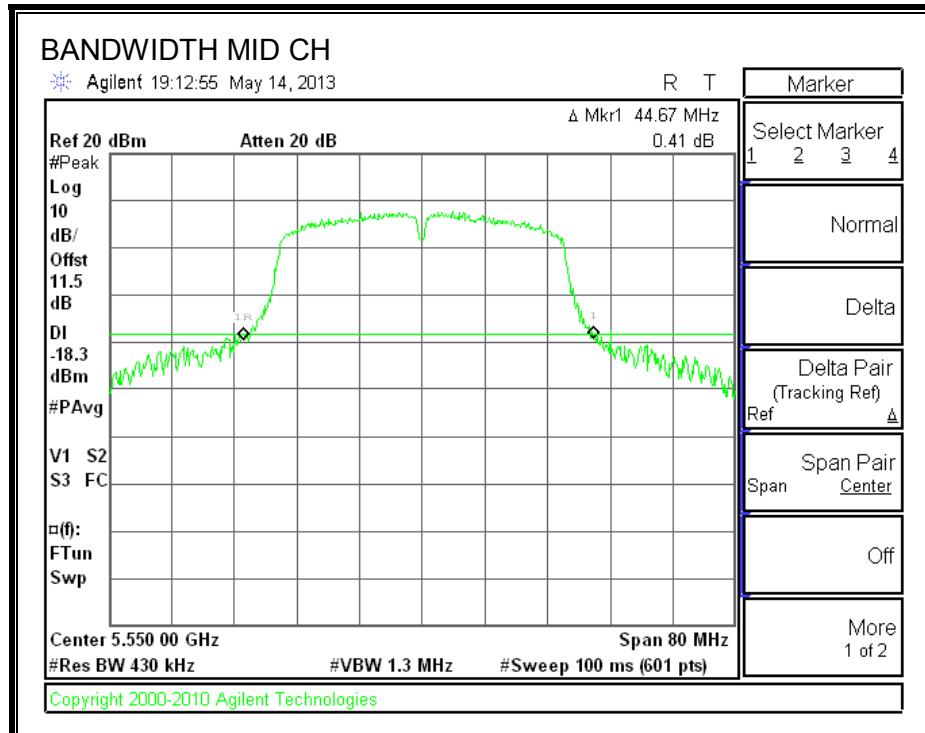

8.9.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	35.7980
Mid	5550	35.7564
High	5670	35.7595

99% BANDWIDTH

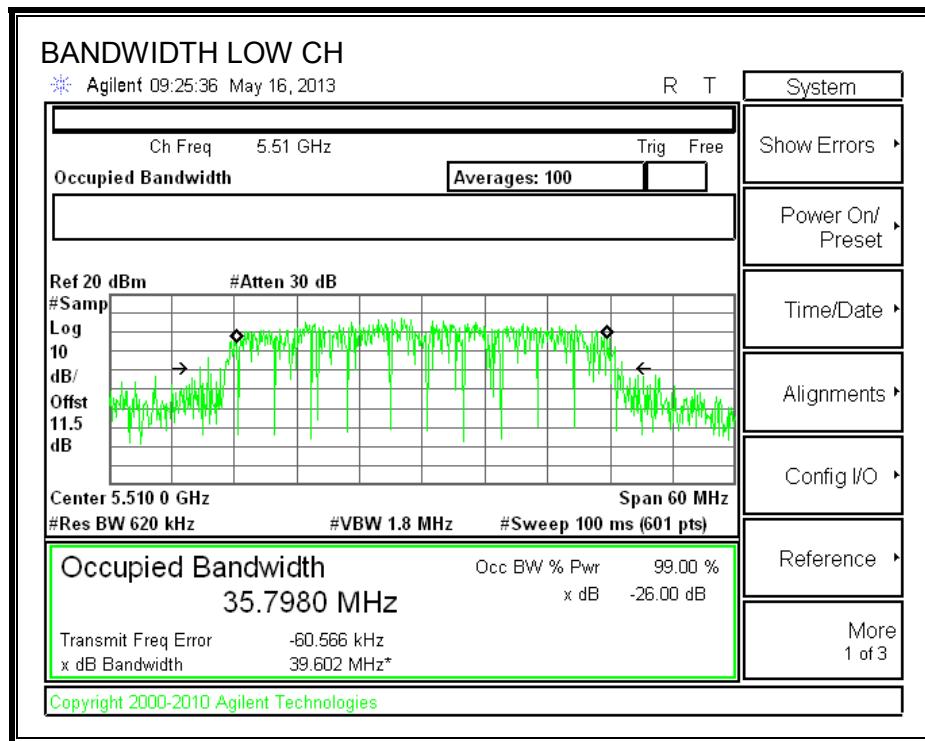

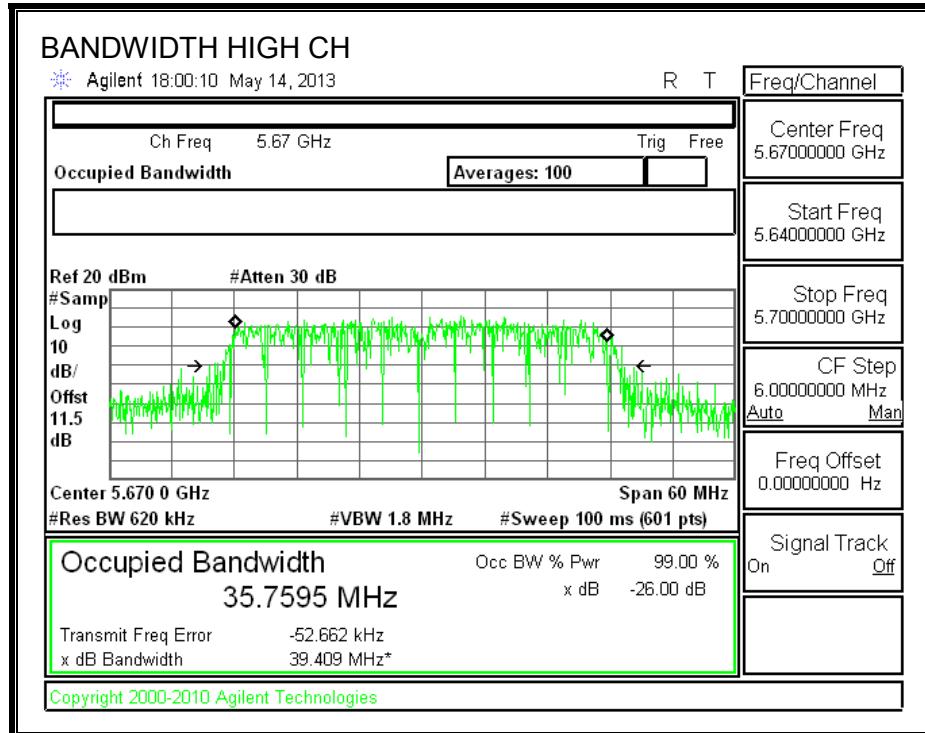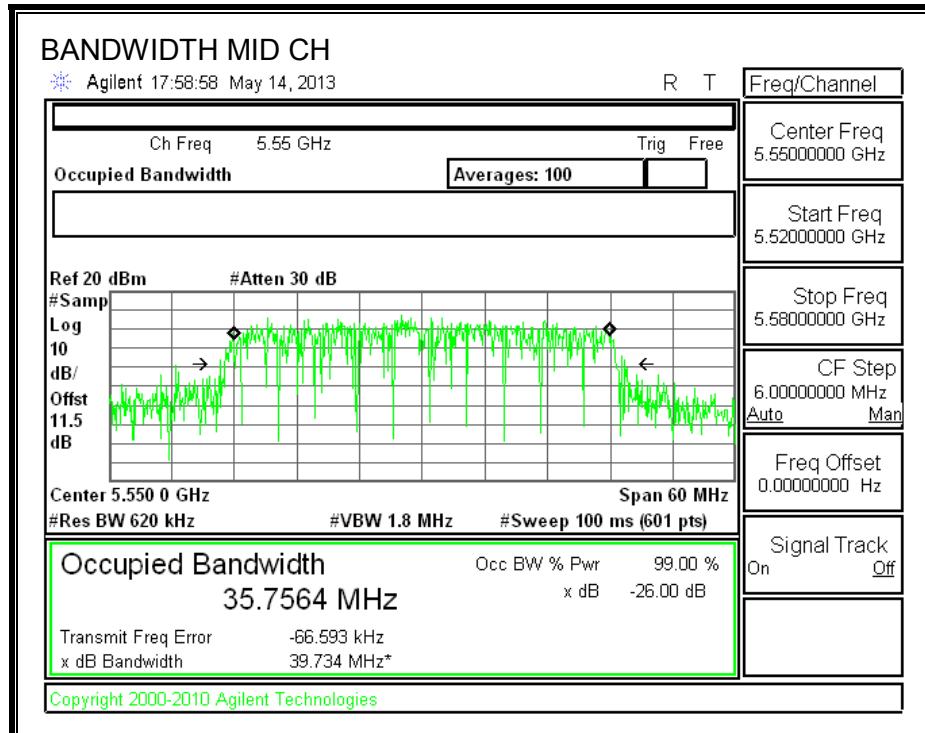

8.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 11.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5510	14.02
Mid	5550	13.95
High	5670	14.08

8.9.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5510	44.00	-5.50
Mid	5550	44.67	-5.50
High	5670	44.80	-5.50

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5510	24.00	11.00
Mid	5550	24.00	11.00
High	5670	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	14.078	14.24	24.00	-9.76
Mid	5550	14.096	14.26	24.00	-9.74
High	5670	14.077	14.24	24.00	-9.76

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5510	0.206	0.37	11.00	-10.63
Mid	5550	0.299	0.46	11.00	-10.54
High	5670	0.264	0.42	11.00	-10.58

OUTPUT POWER AND PPSD

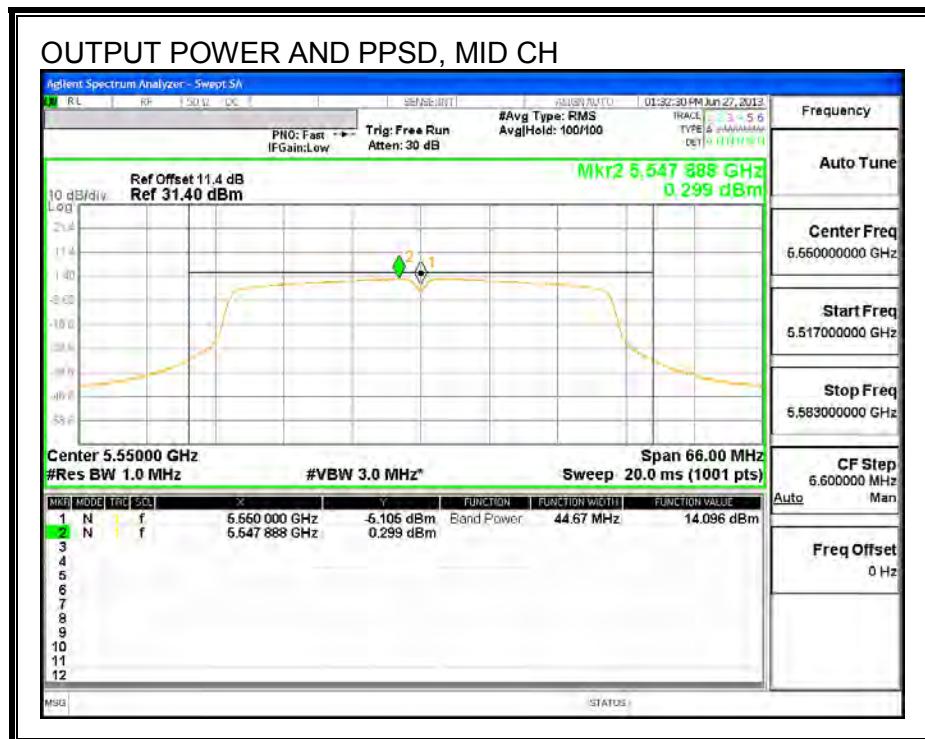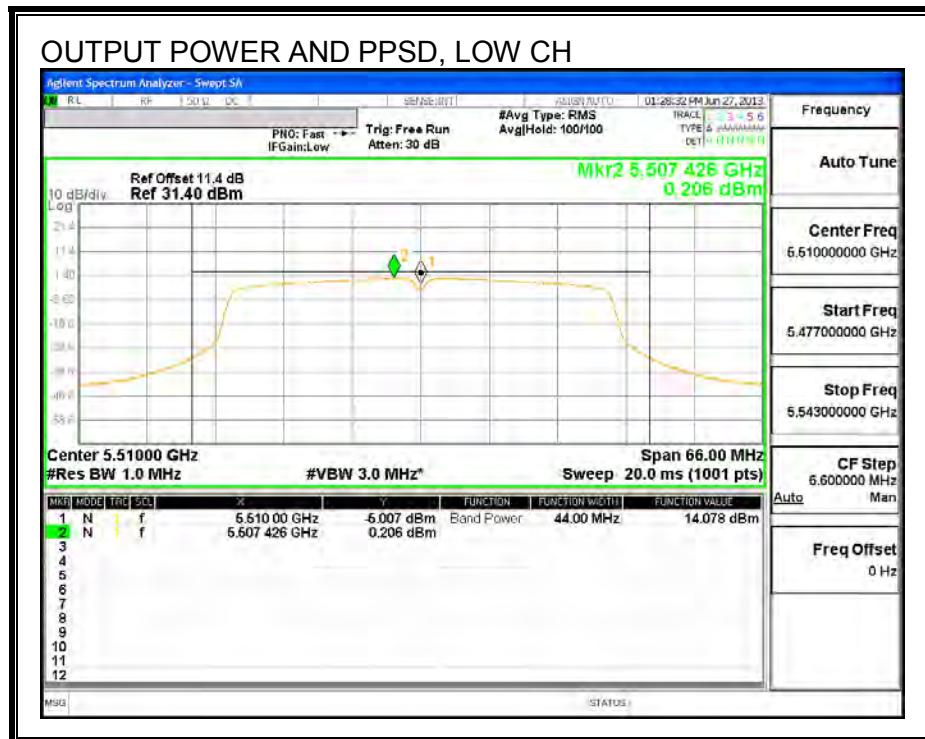

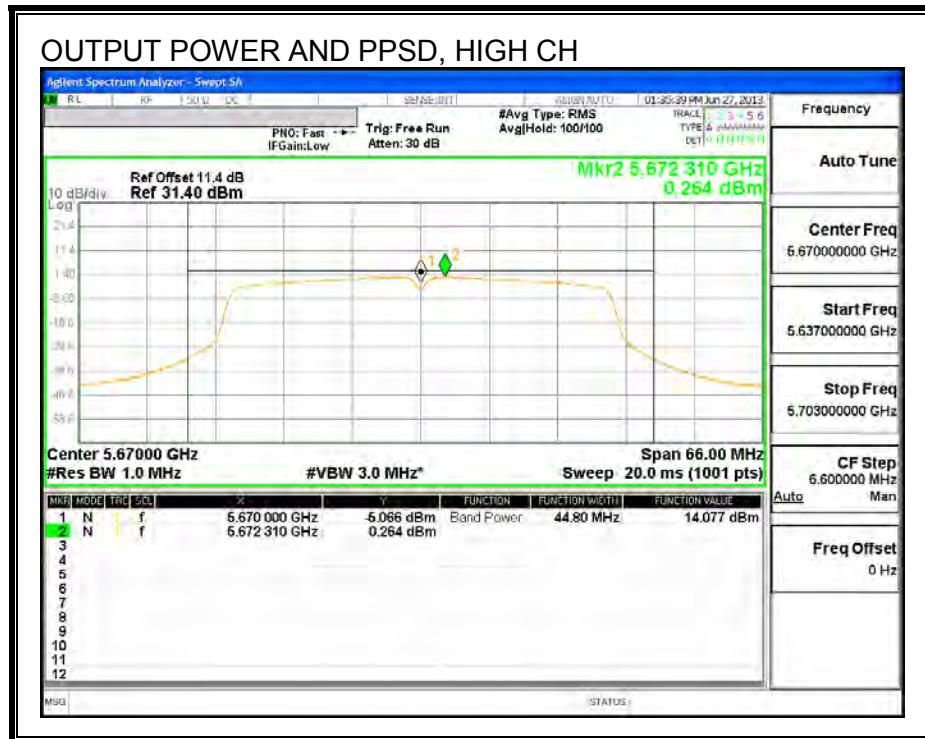

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 1 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



TEST RESULT



No other spurious emissions were found above 18G.

9.2. TRANSMITTER ABOVE 1 GHz


9.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL)

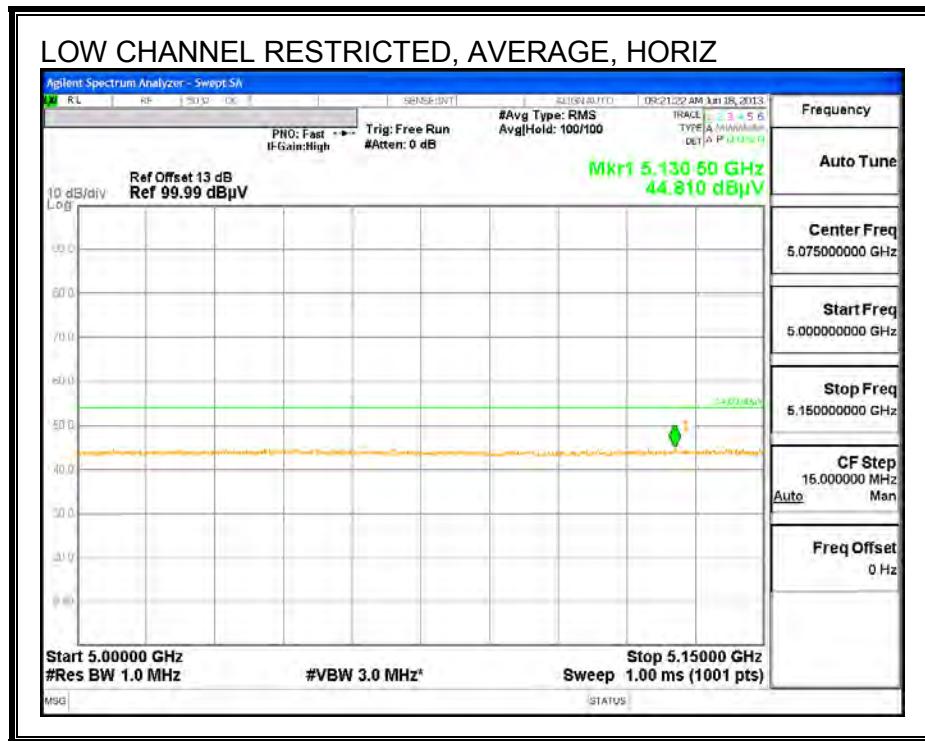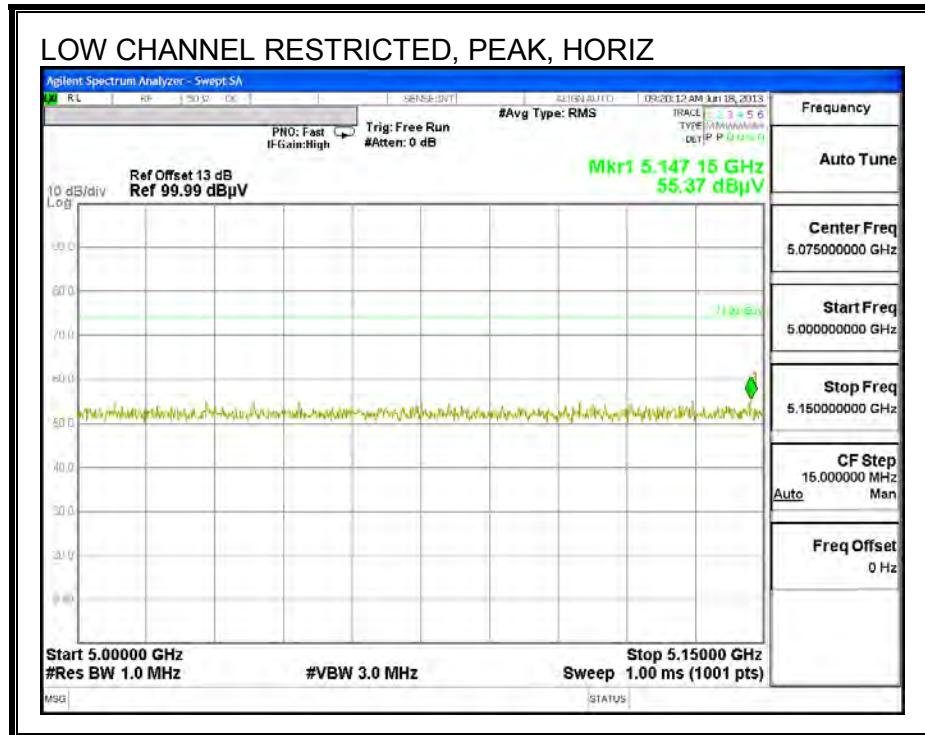

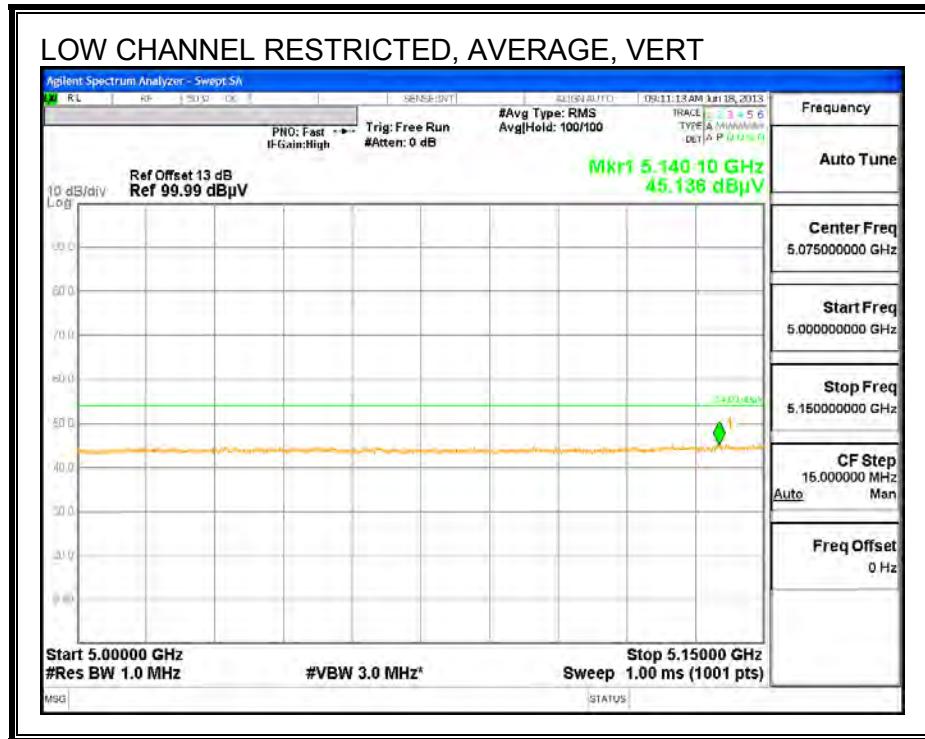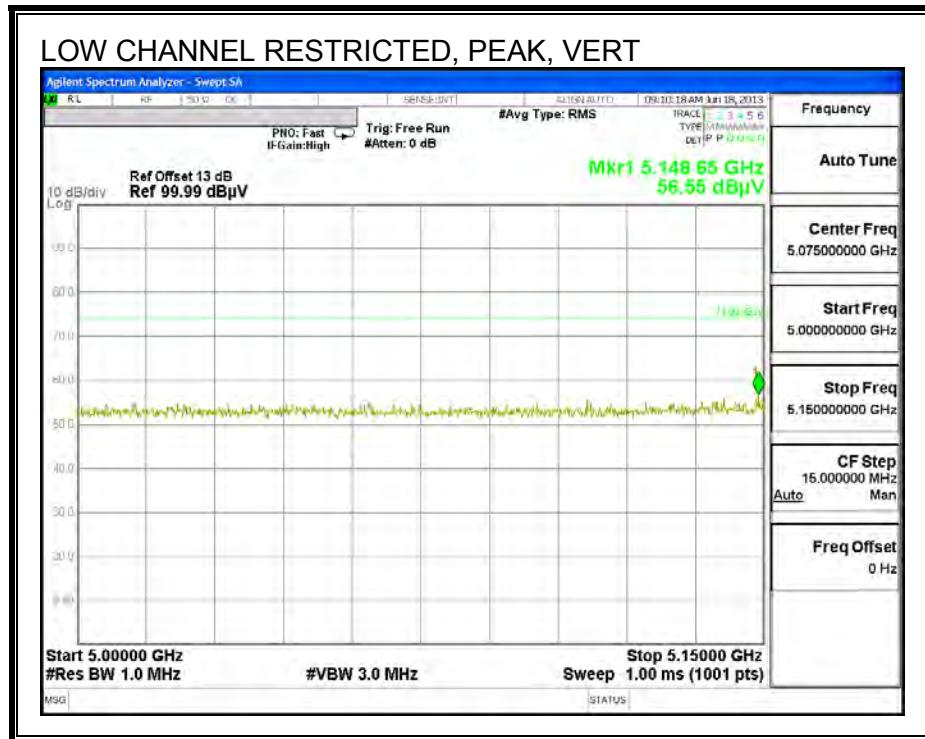


HARMONICS AND SPURIOUS EMISSIONS

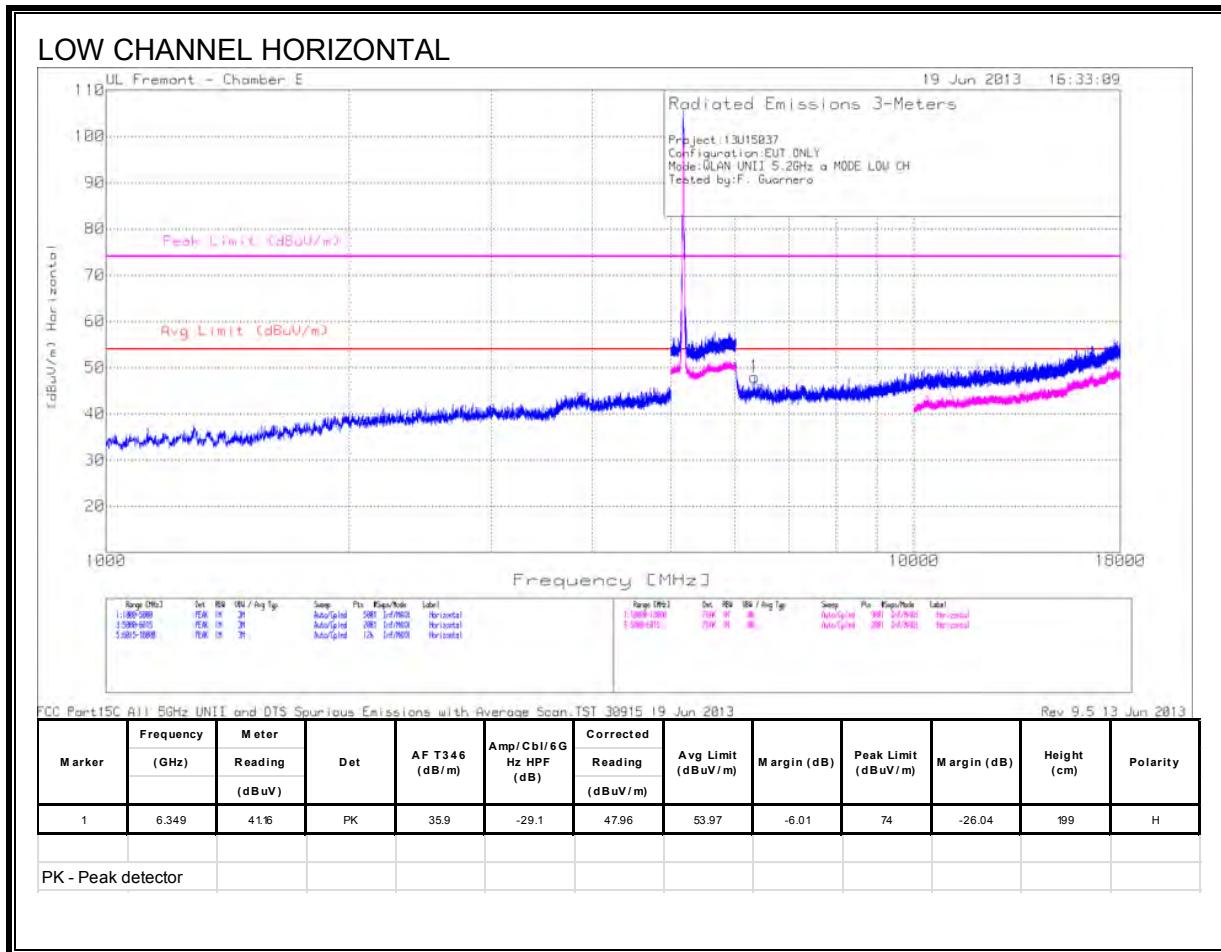


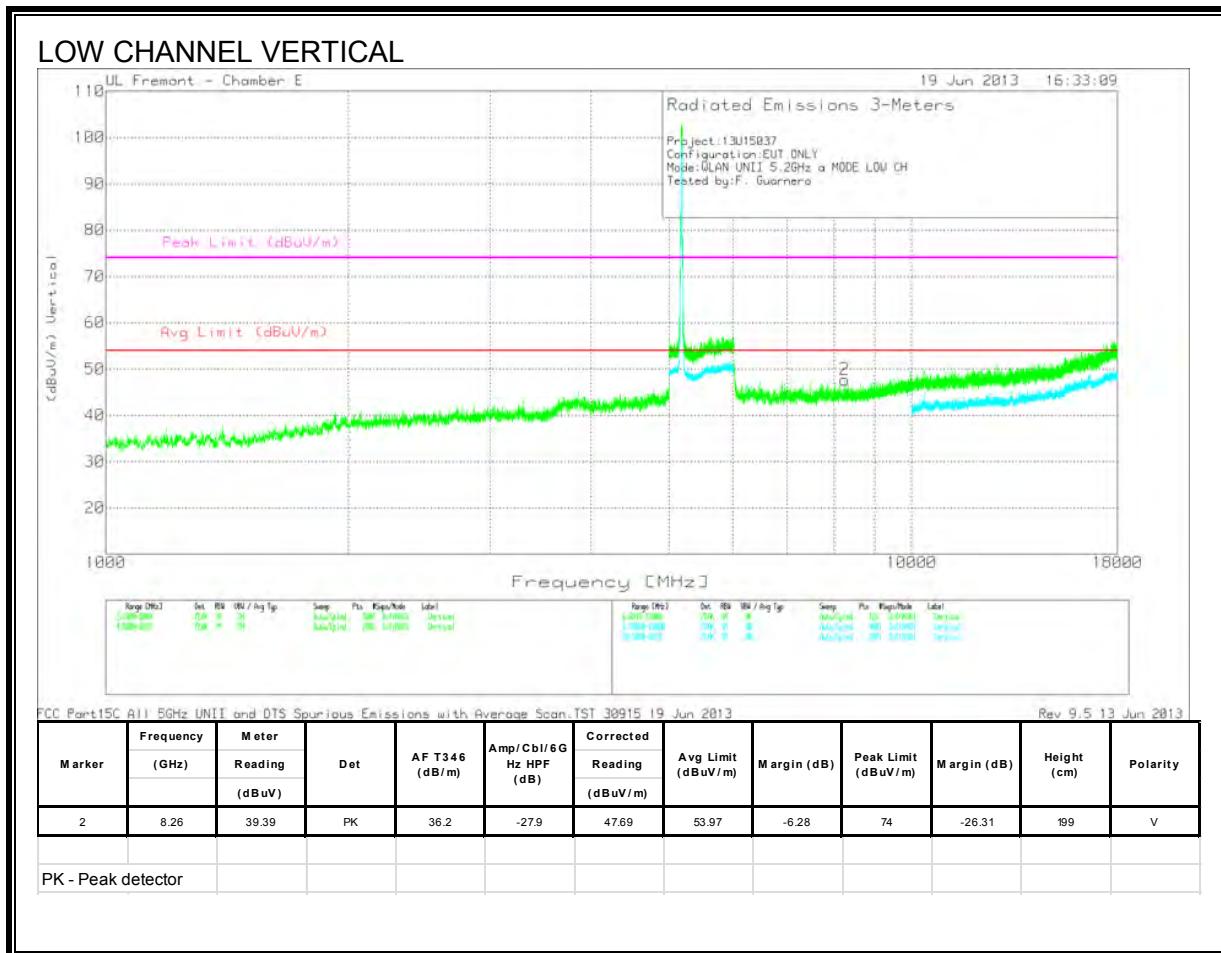

MID CHANNEL HORIZONTAL

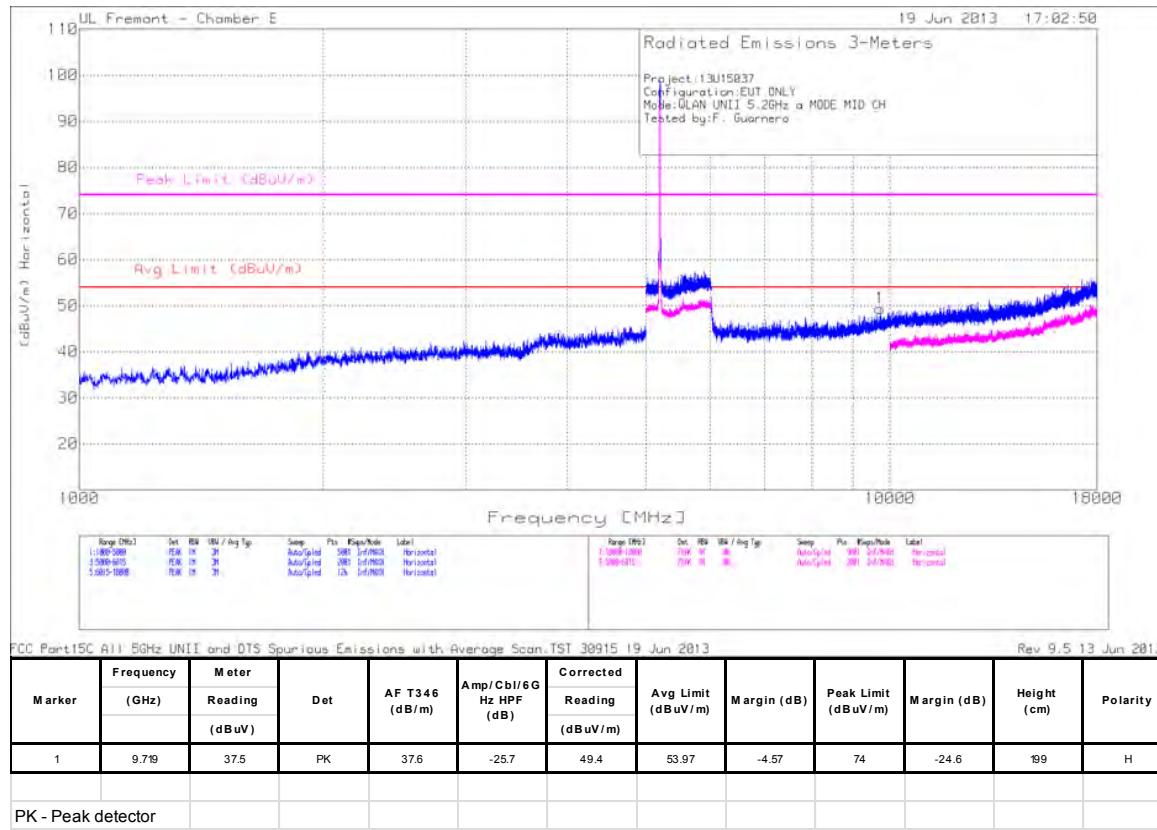



MID CHANNEL VERTICAL

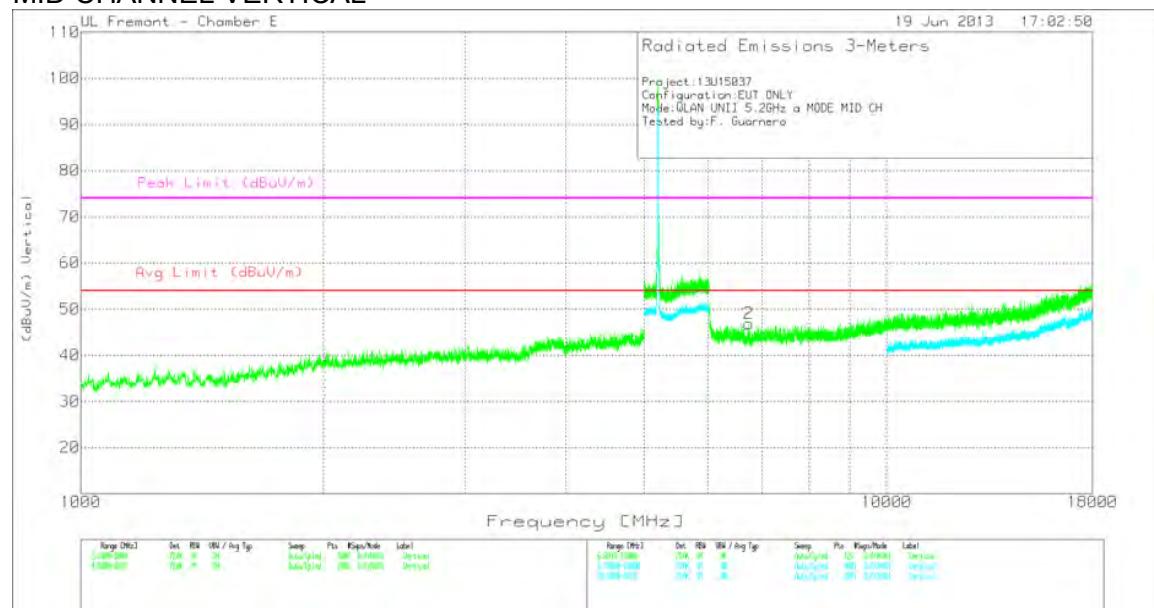

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan TST 30915 19 Jun 2013										Rev. 9.5 13 Jun 2013		
Marker	Frequency	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6G Hz HPF (dB)	Corrected	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)	Reading				Reading						
		(dBuV)				(dBuV/m)						
2	6.741	40.94	PK	35.8	-29.9	46.84	53.97	-7.13	74	-27.16	199	V
PK - Peak detector												



HIGH CHANNEL HORIZONTAL


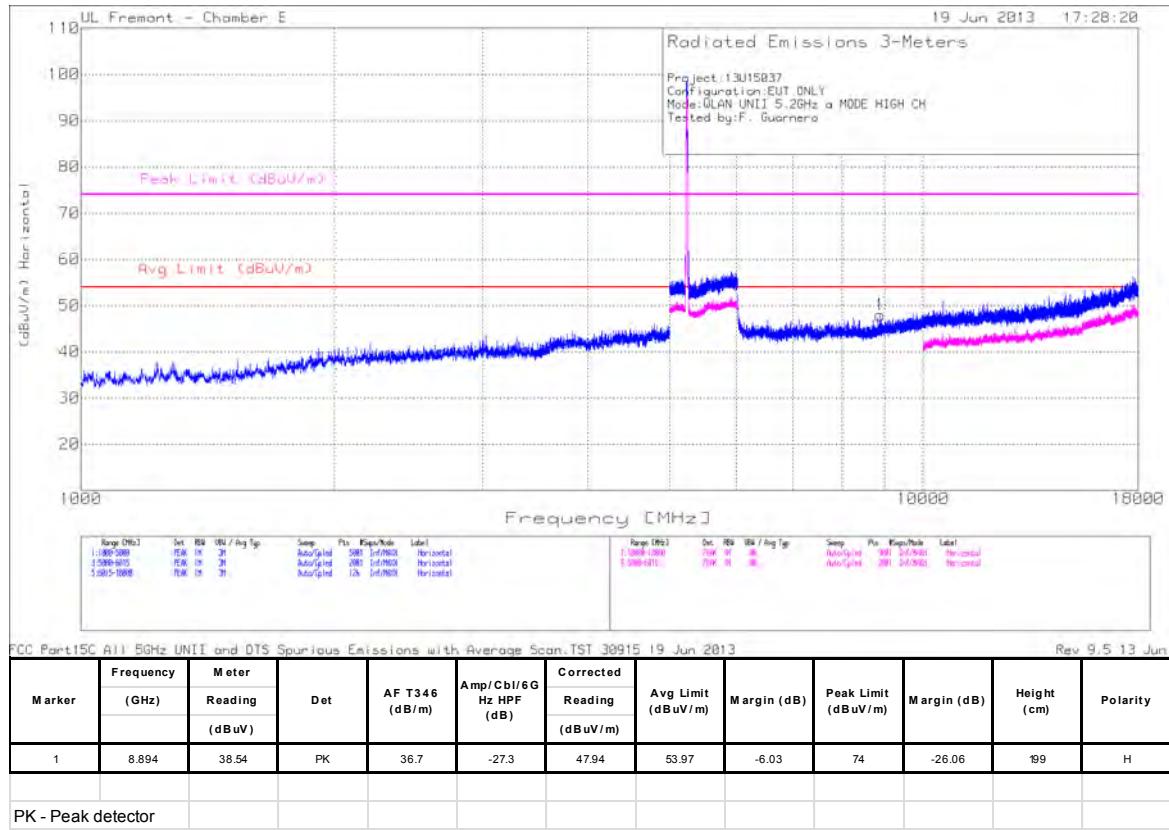


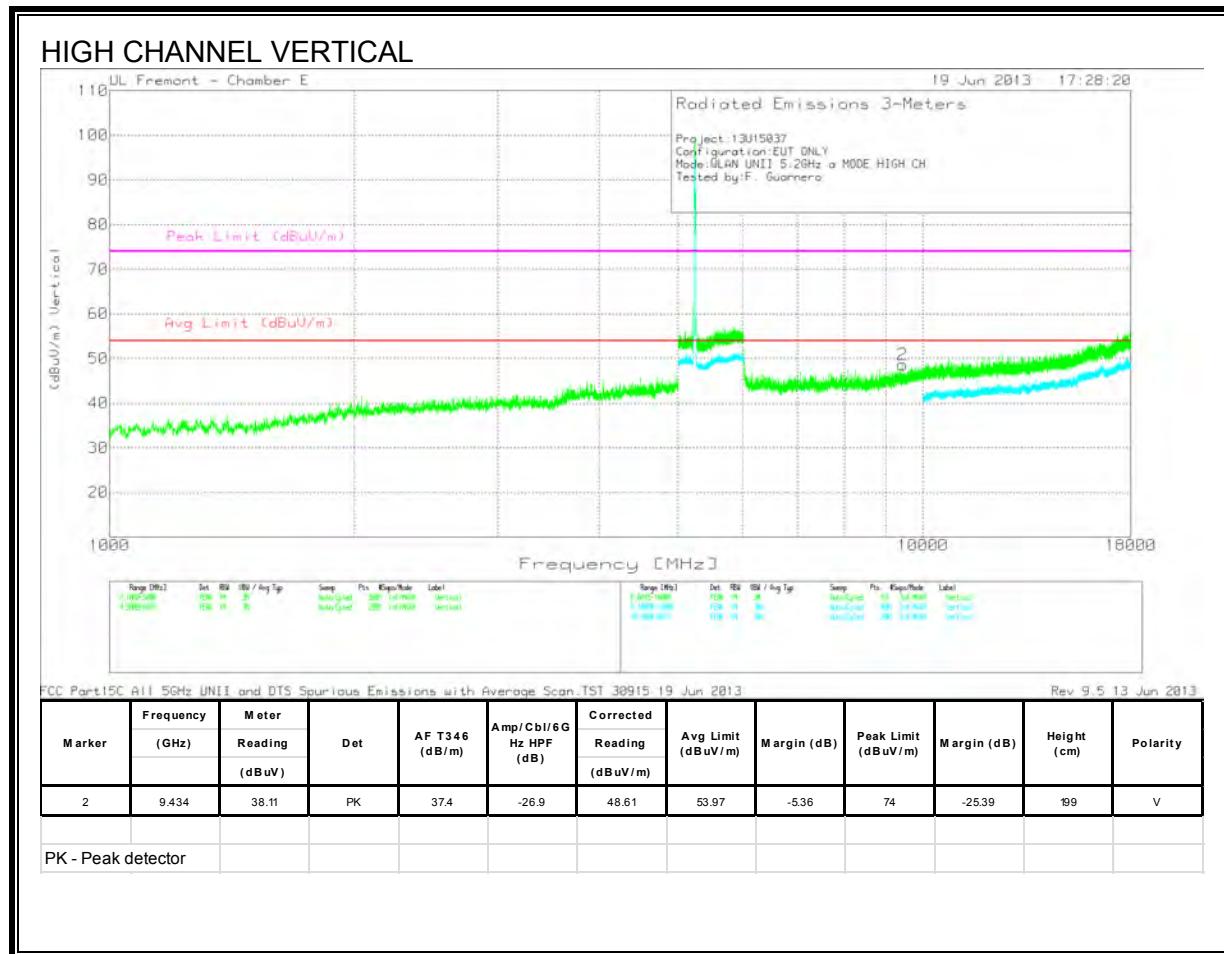


9.2.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL)

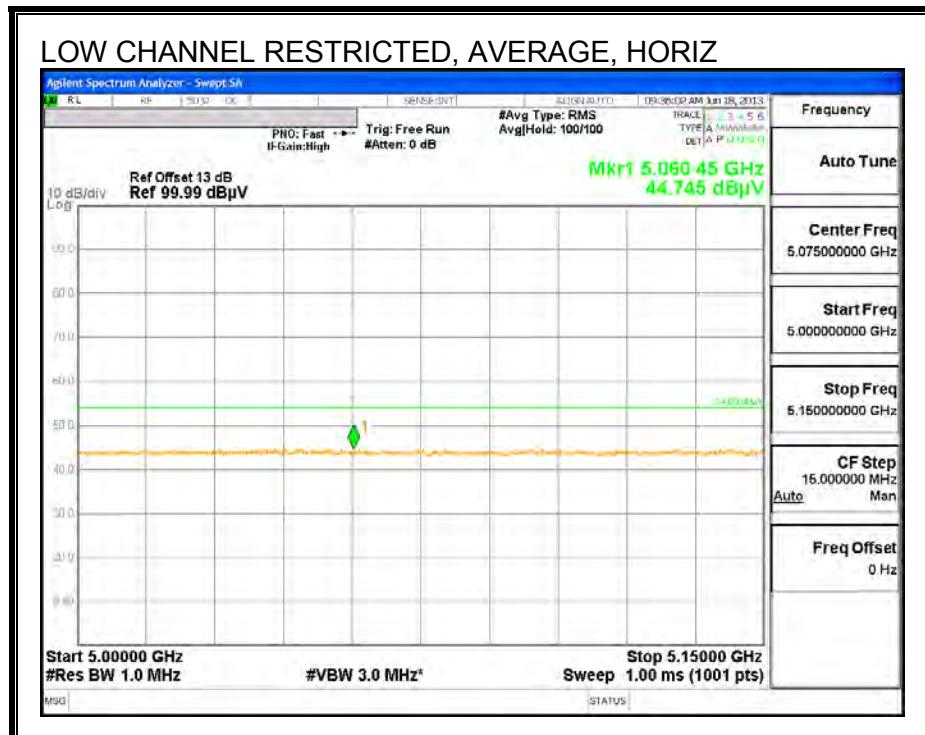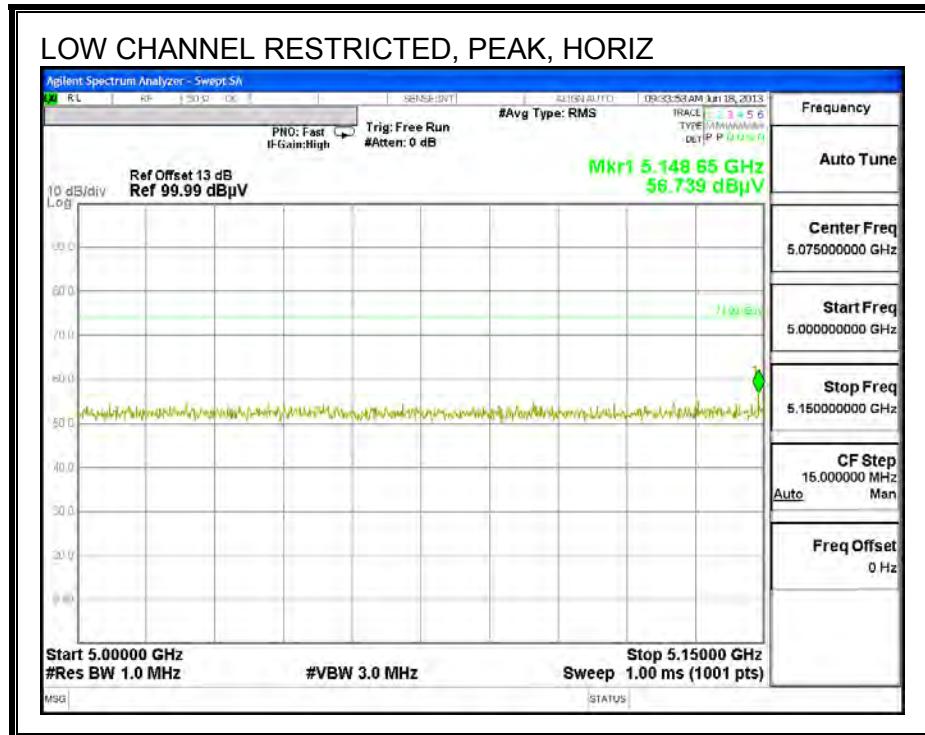


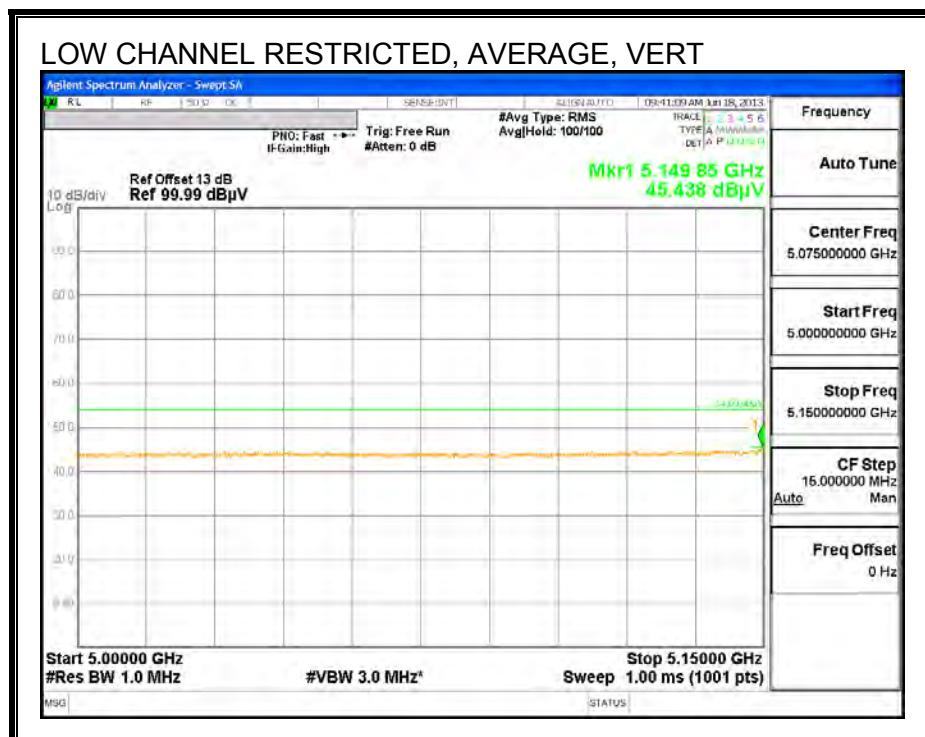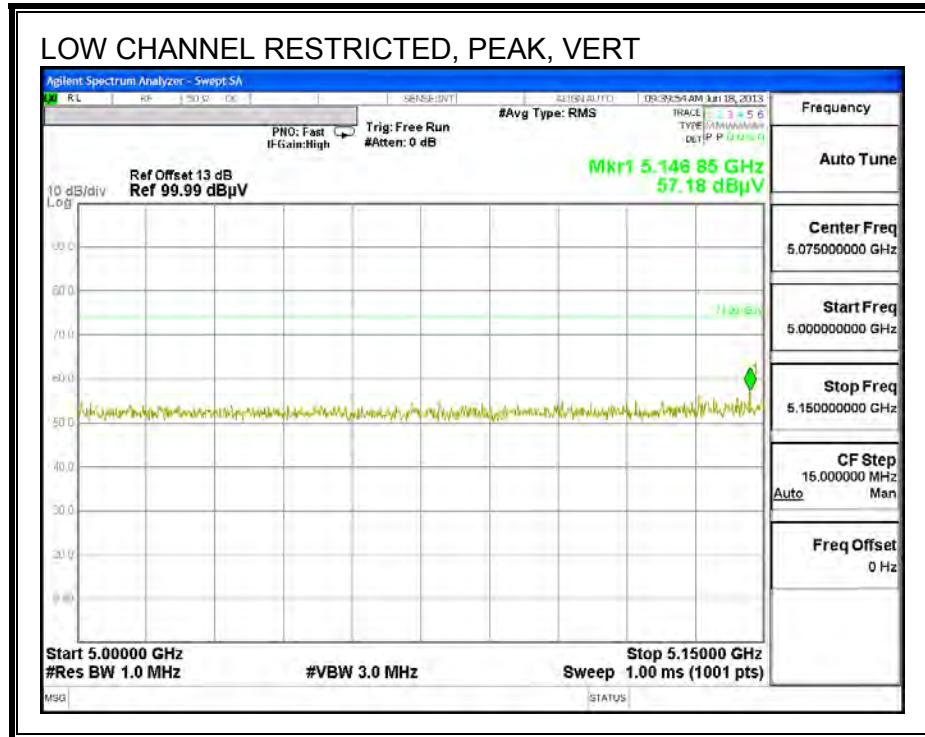



HARMONICS AND SPURIOUS EMISSIONS

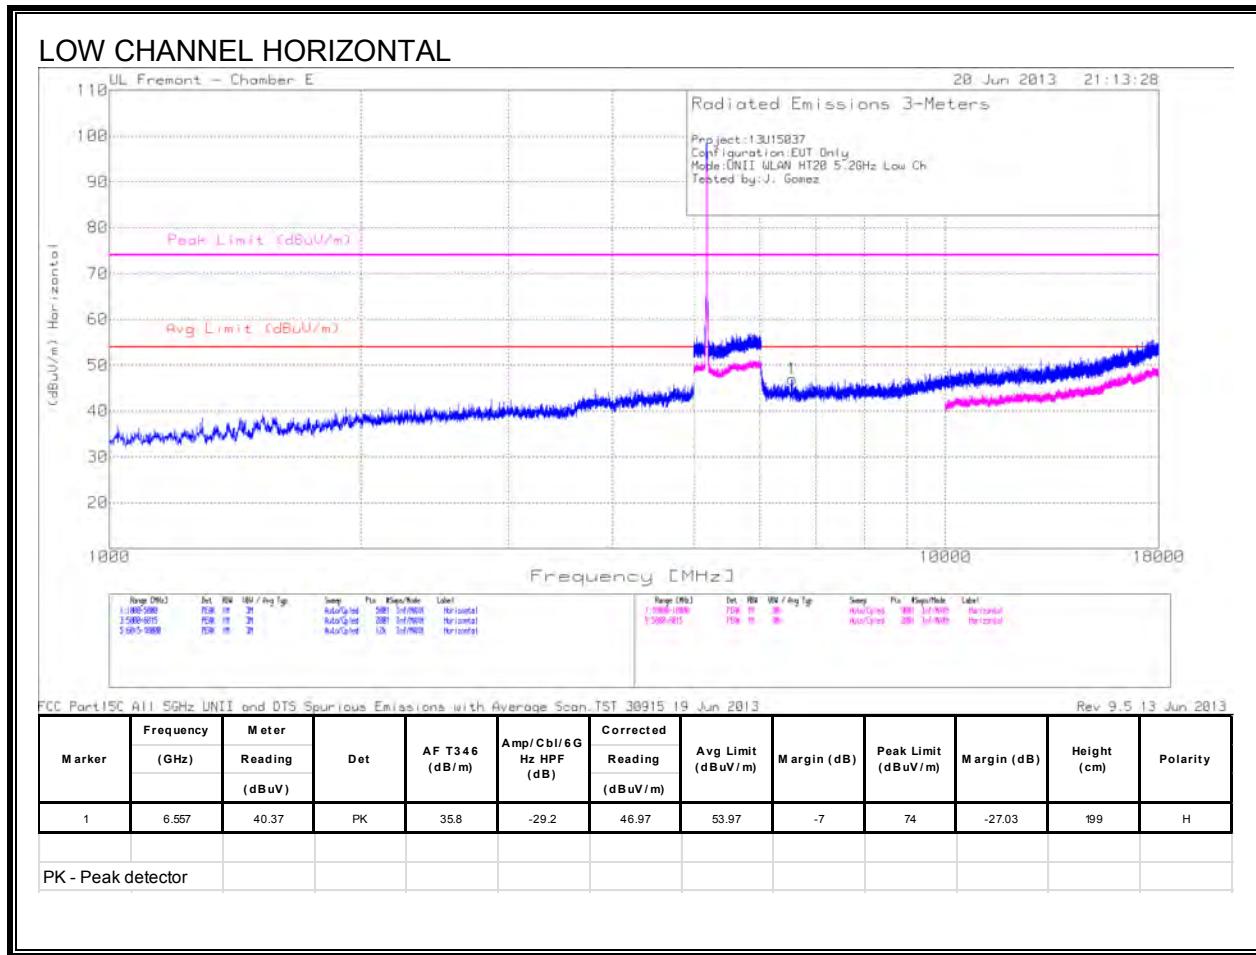


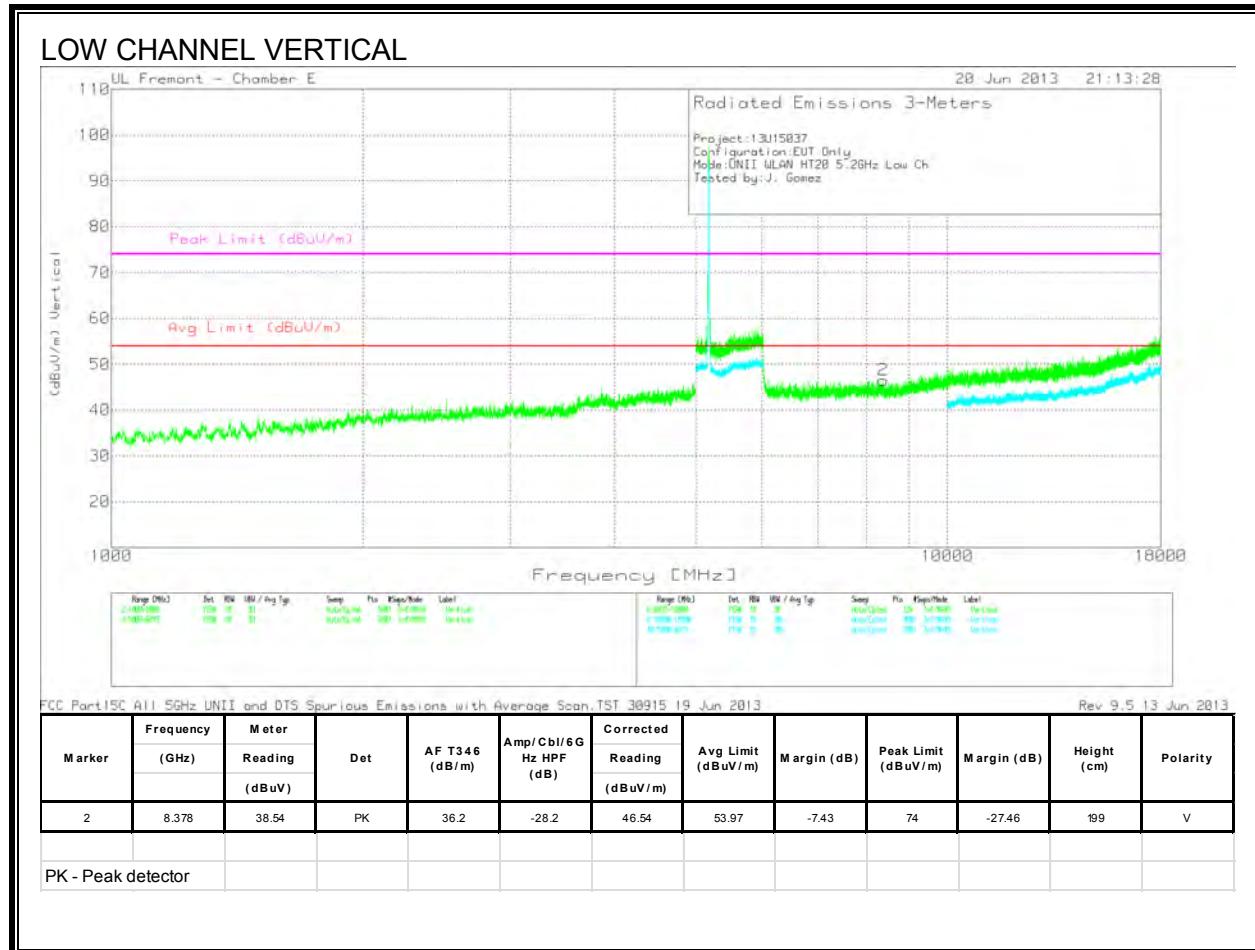

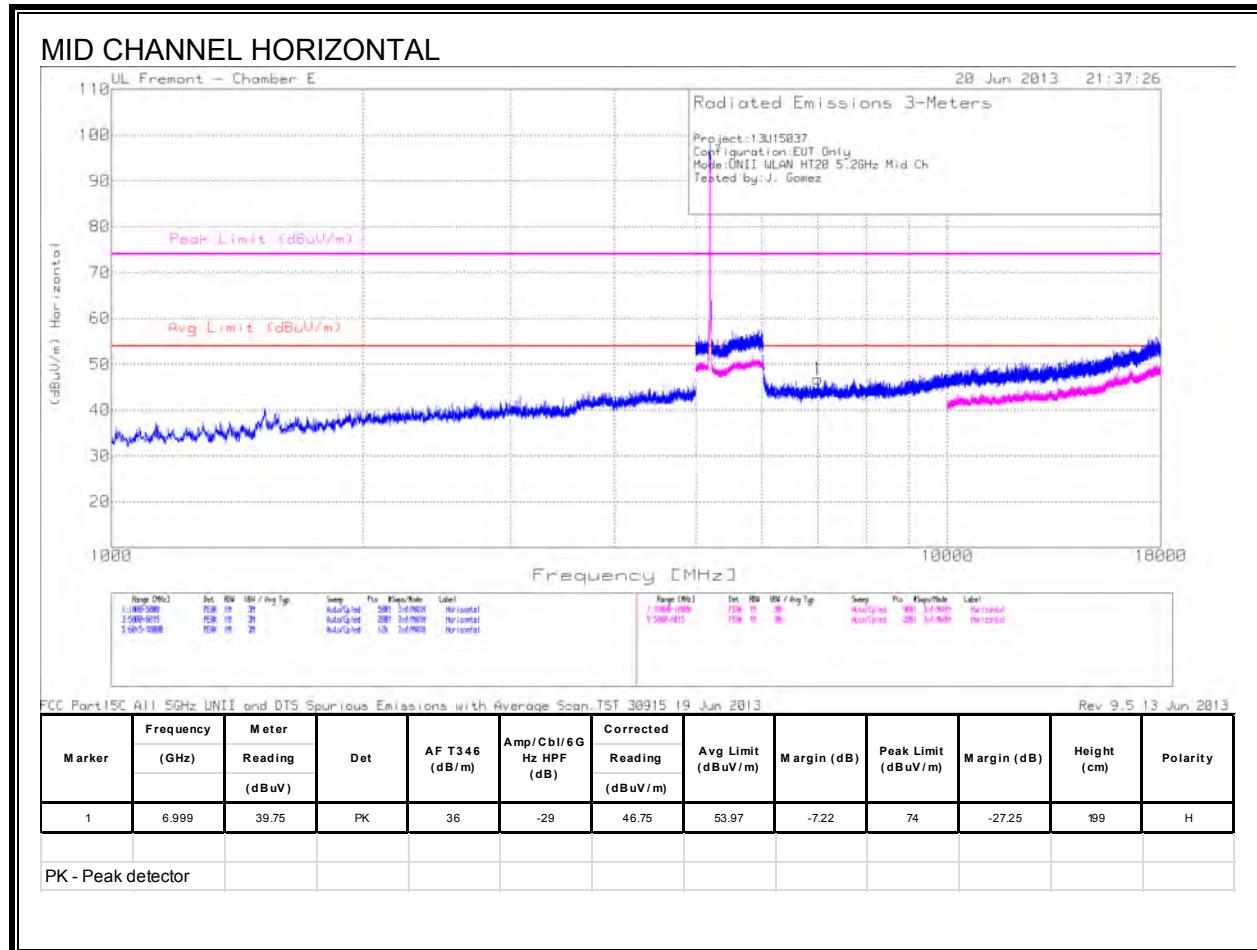


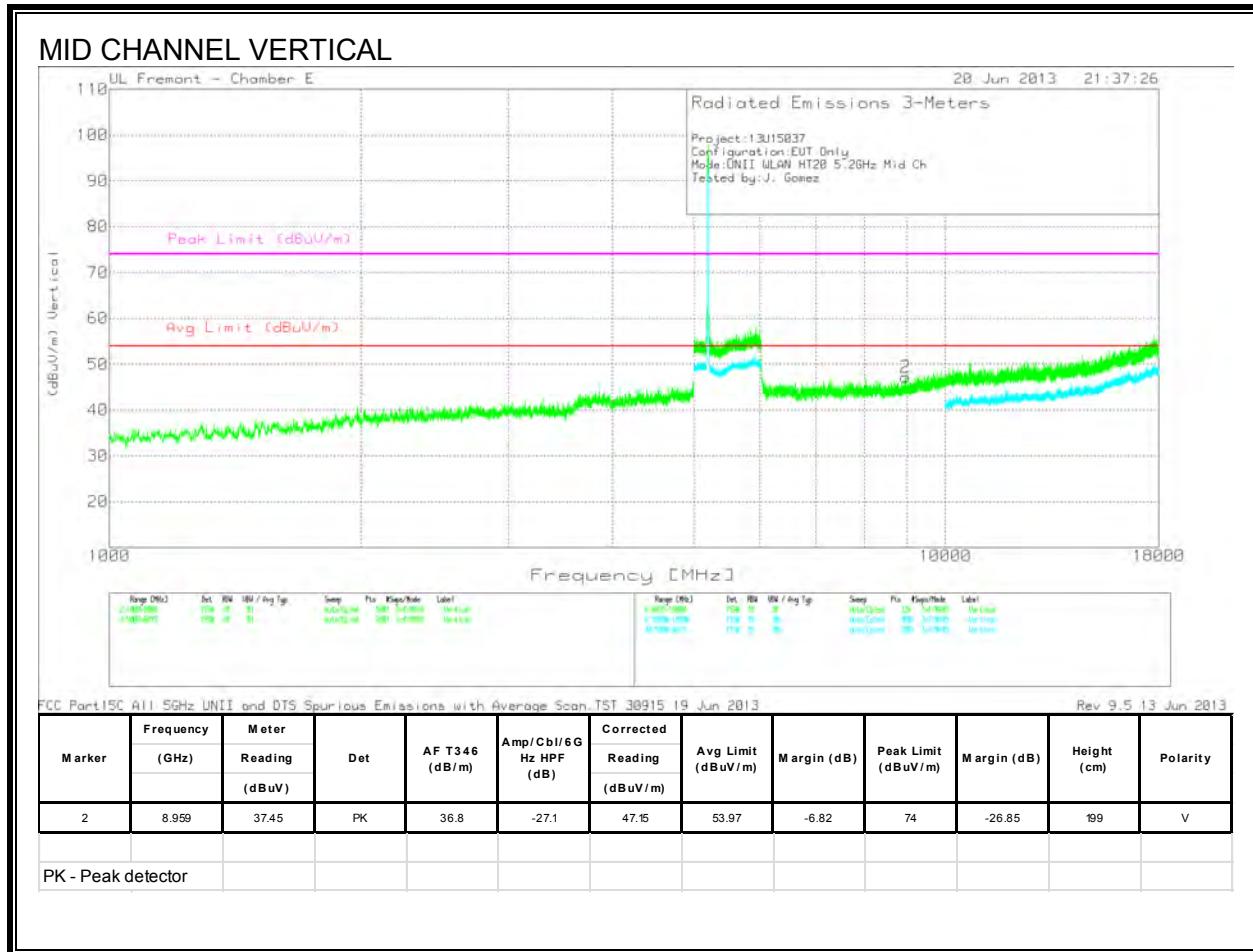



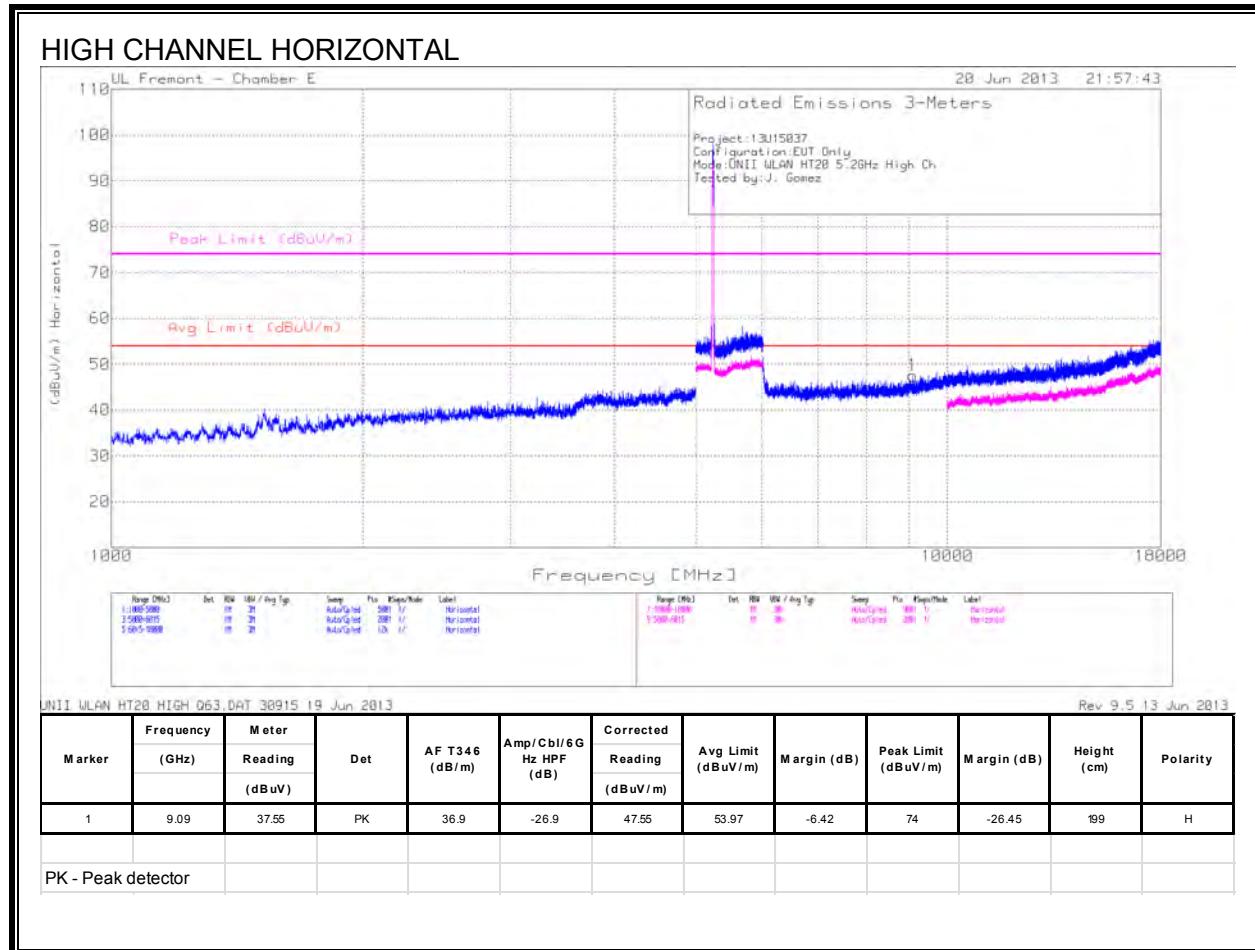


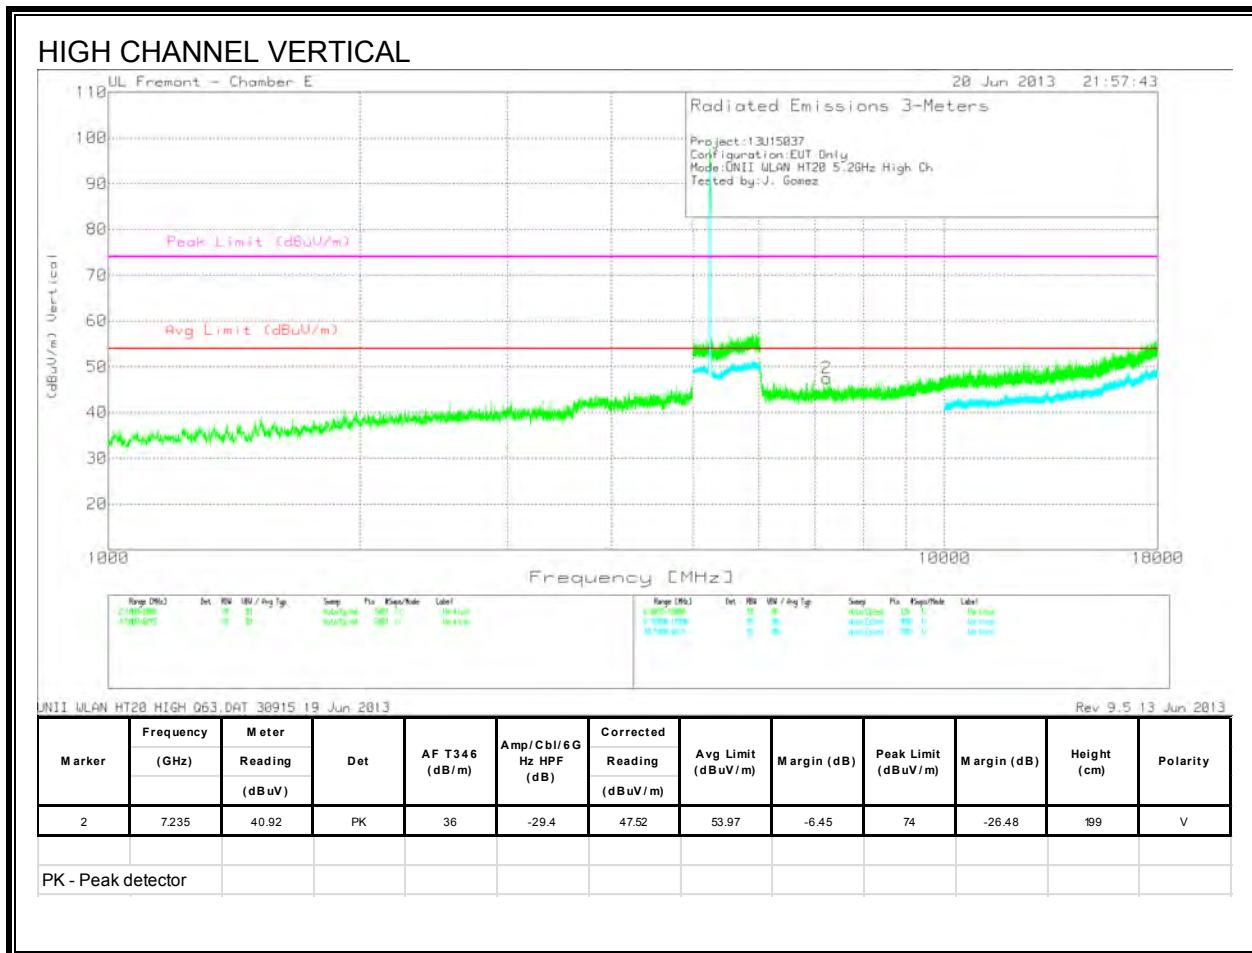

9.2.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND


RESTRICTED BANEDGE (LOW CHANNEL)

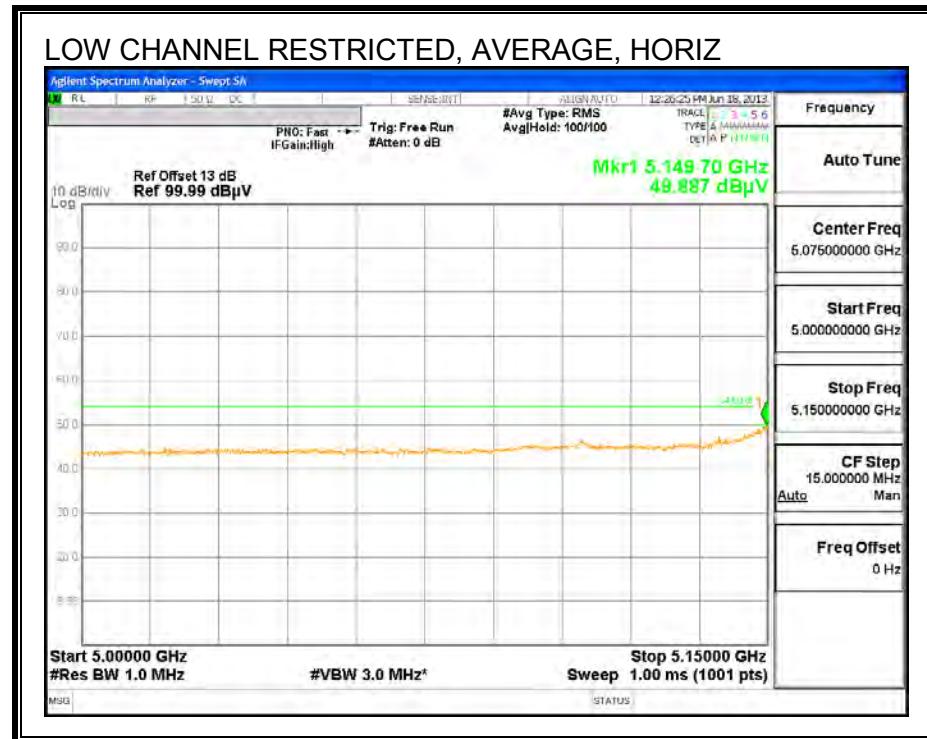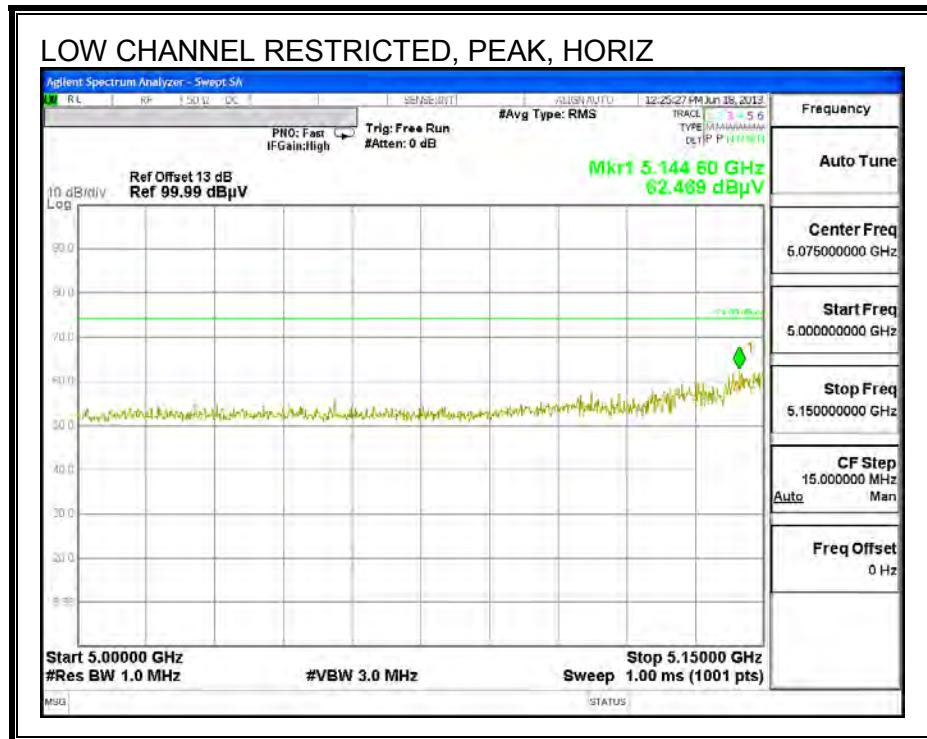

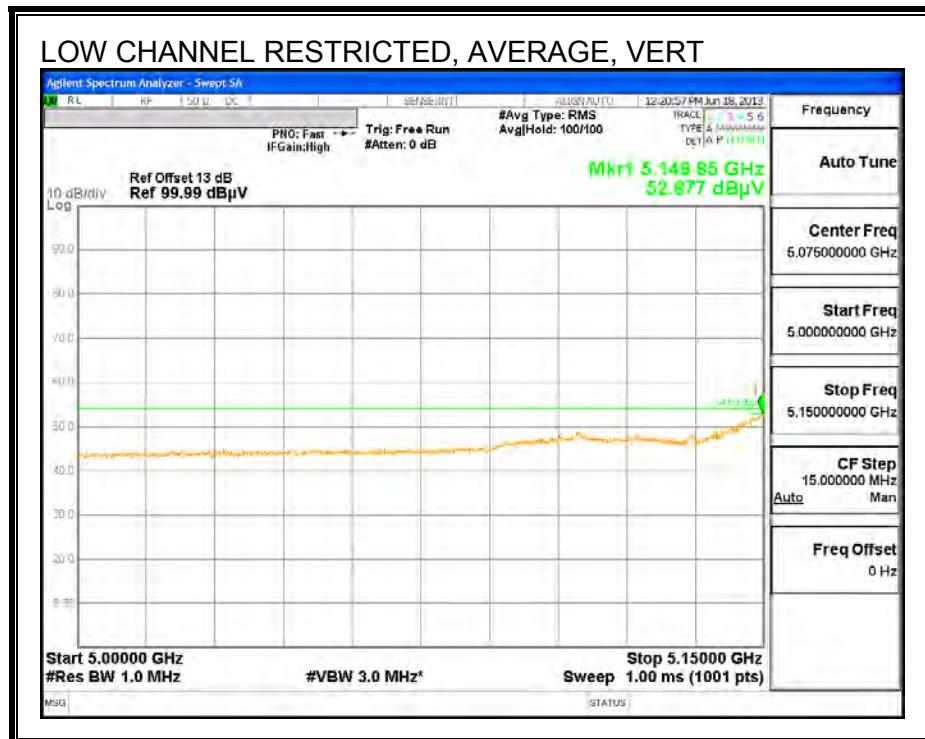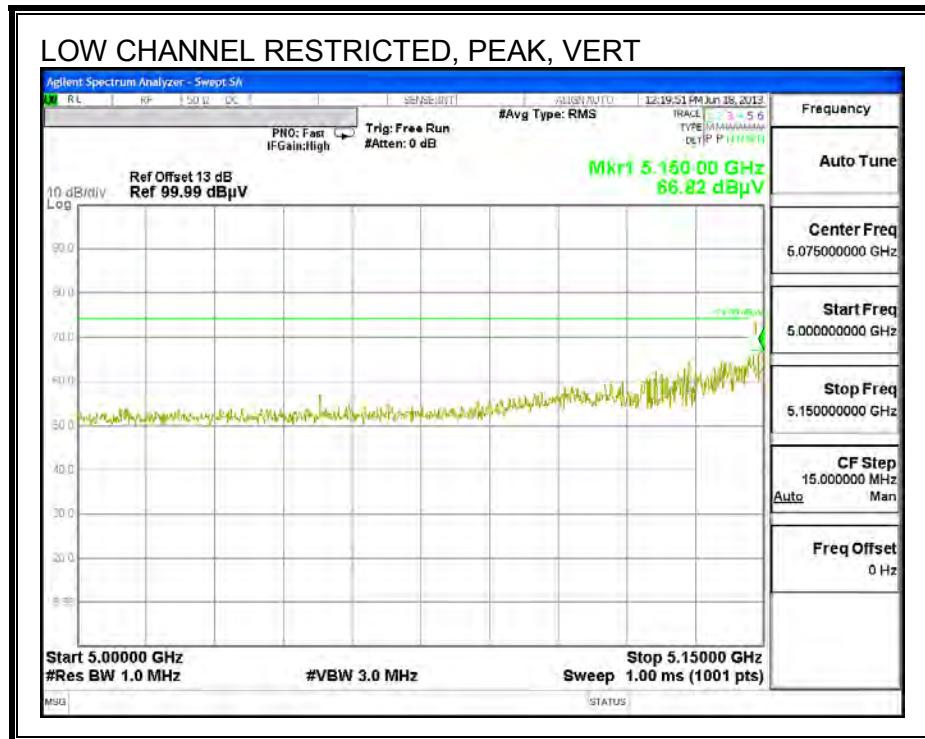

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

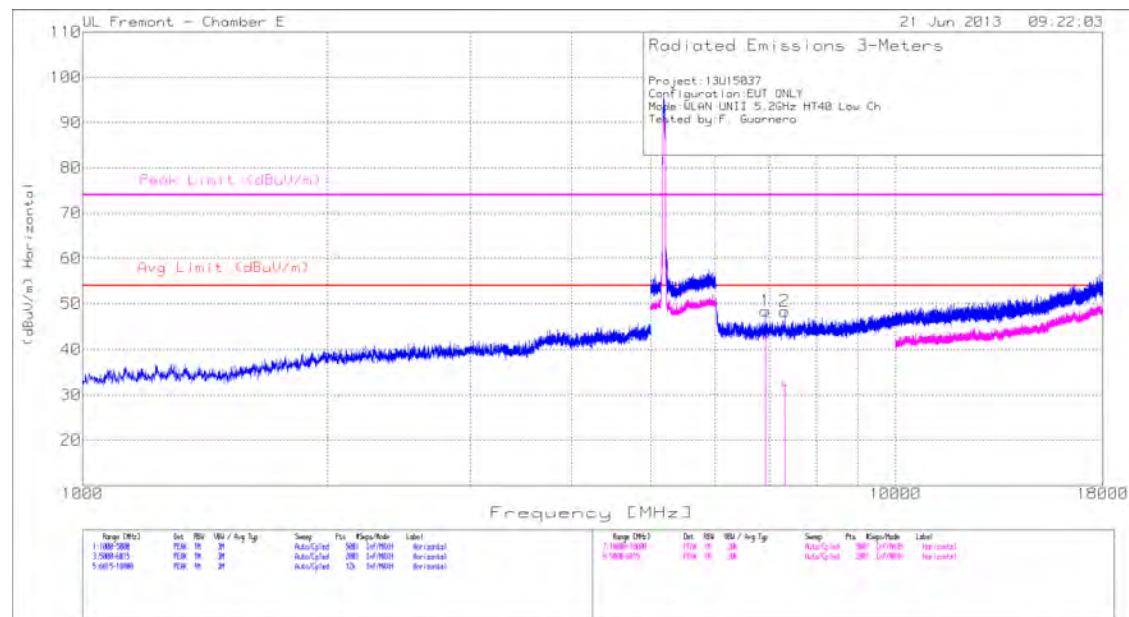


FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 38915 19 Jun 2013


Rev 9.5 13 Jun 2013

Frequency (GHz)	Meter Reading (dBuV)			AF T346 (dB/m)	Amp/Cbl/6GHz HPF (dB)	Corrected Reading dBuV/m	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6.92	36.38	Av		35.9	-29.5	42.78	53.97	-11.19	74	-31.22	341	348	H
7.311	25.04	Av		36	-28.8	32.24	53.97	-21.73	74	-41.76	53	164	H

LOW CHANNEL VERTICAL

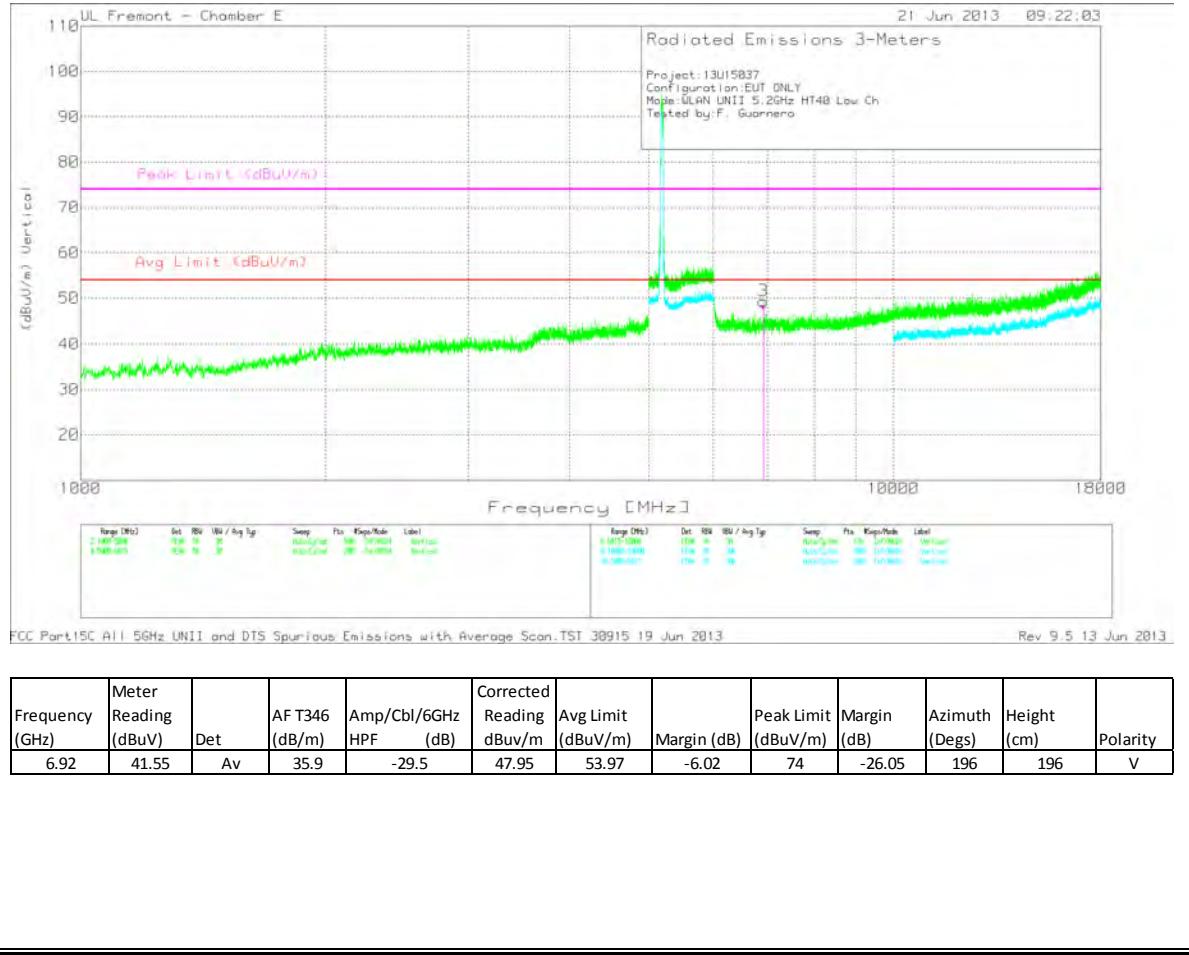


HIGH CHANNEL HORIZONTAL

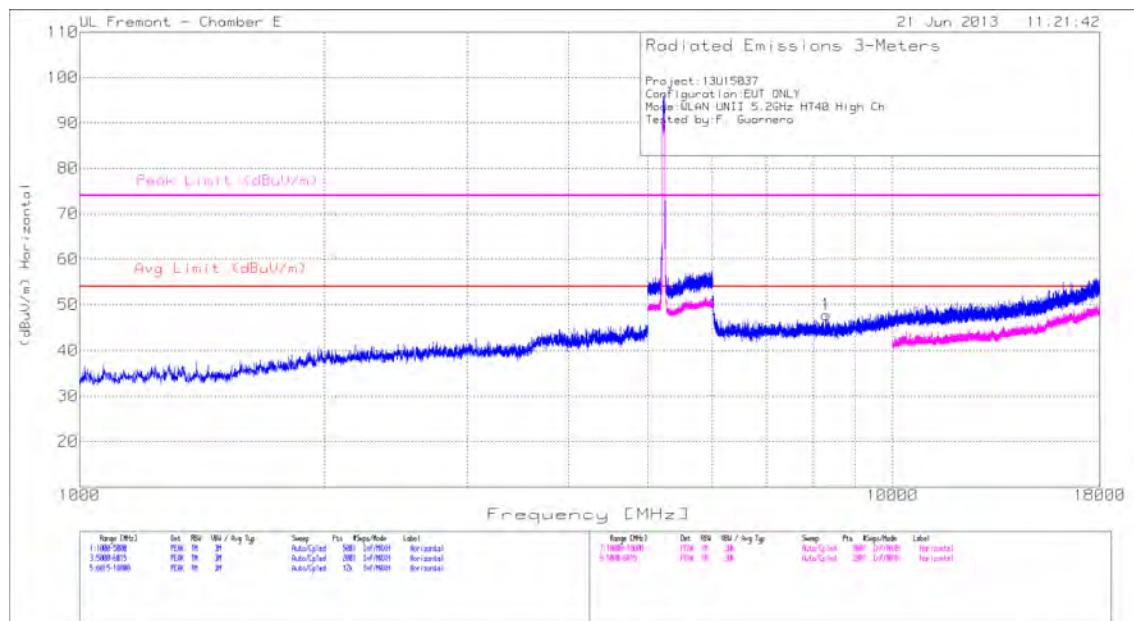

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan TSI 38915 19 Jun 2013



Rev 9.5 13 Jun 2013



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6GHz HPF (dB)	Corrected Reading dBuV/m	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.296	39.36	PK	36.2	-27.8	47.76	53.97	-6.21	74	-26.24	199	H

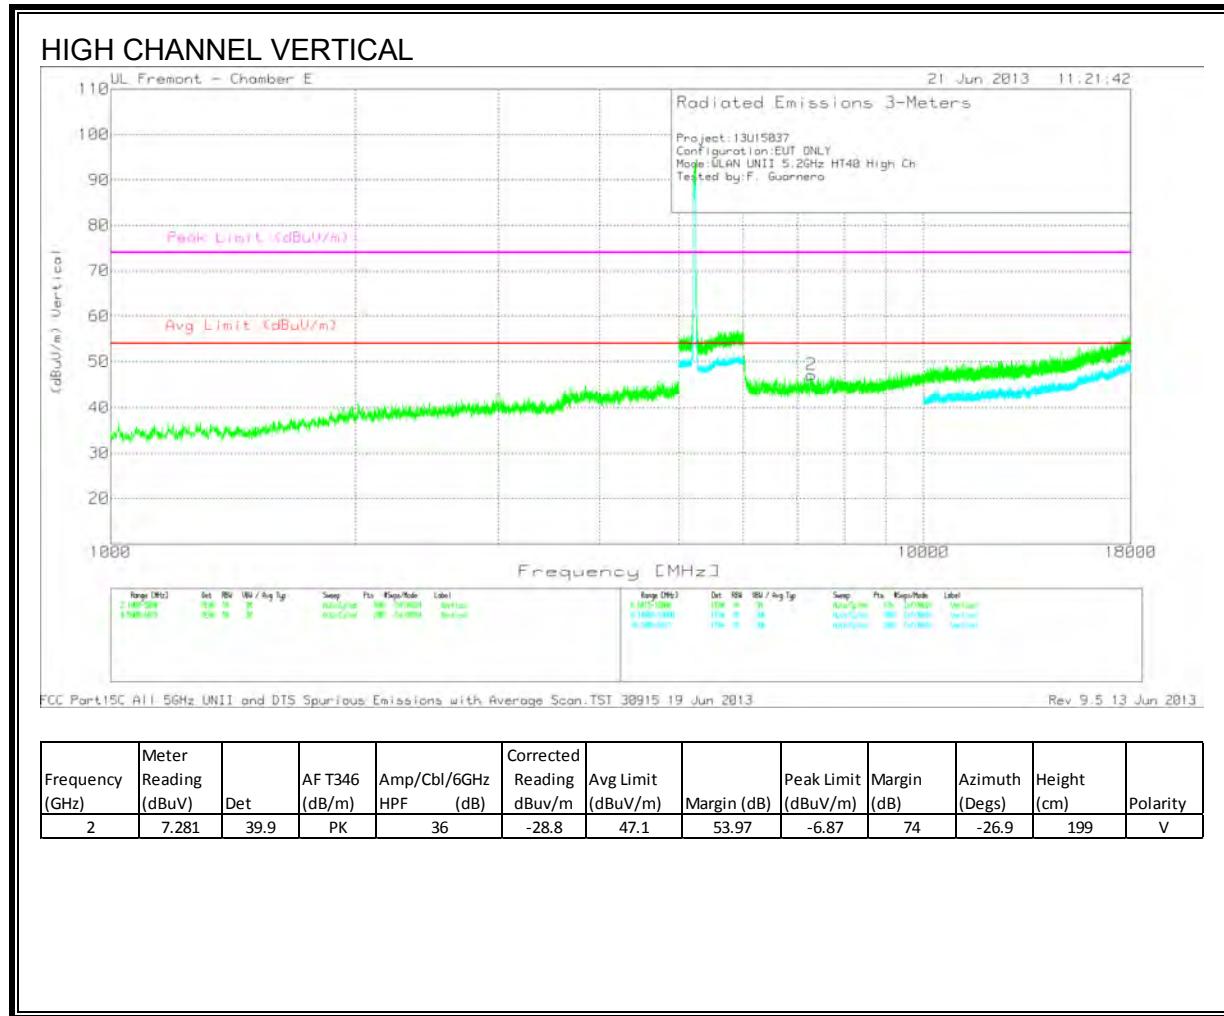


9.2.4. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND


RESTRICTED BANEDGE (HIGH CHANNEL)

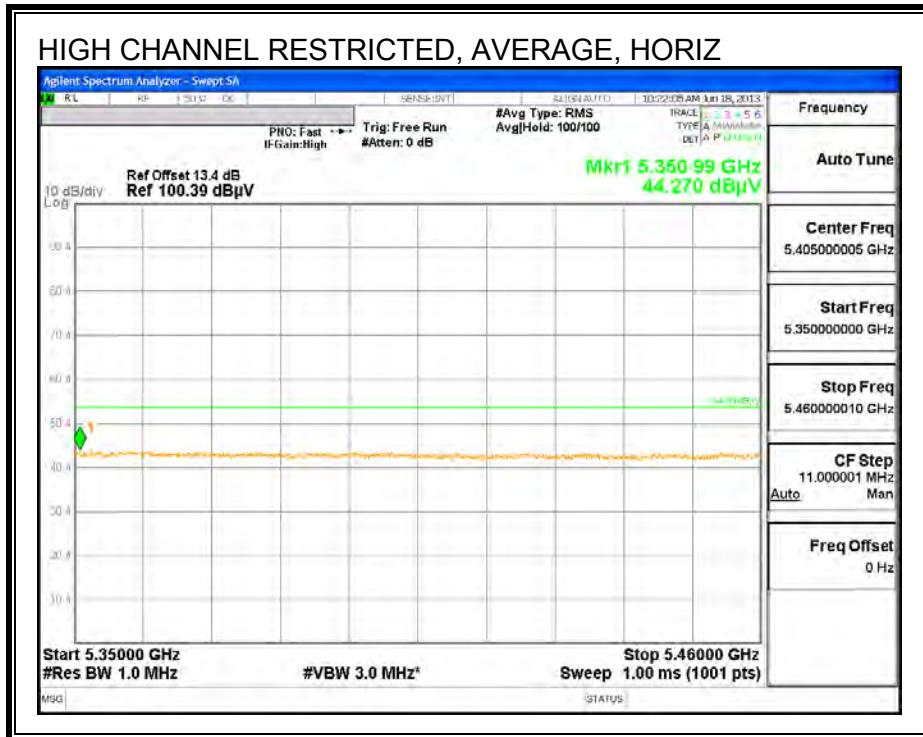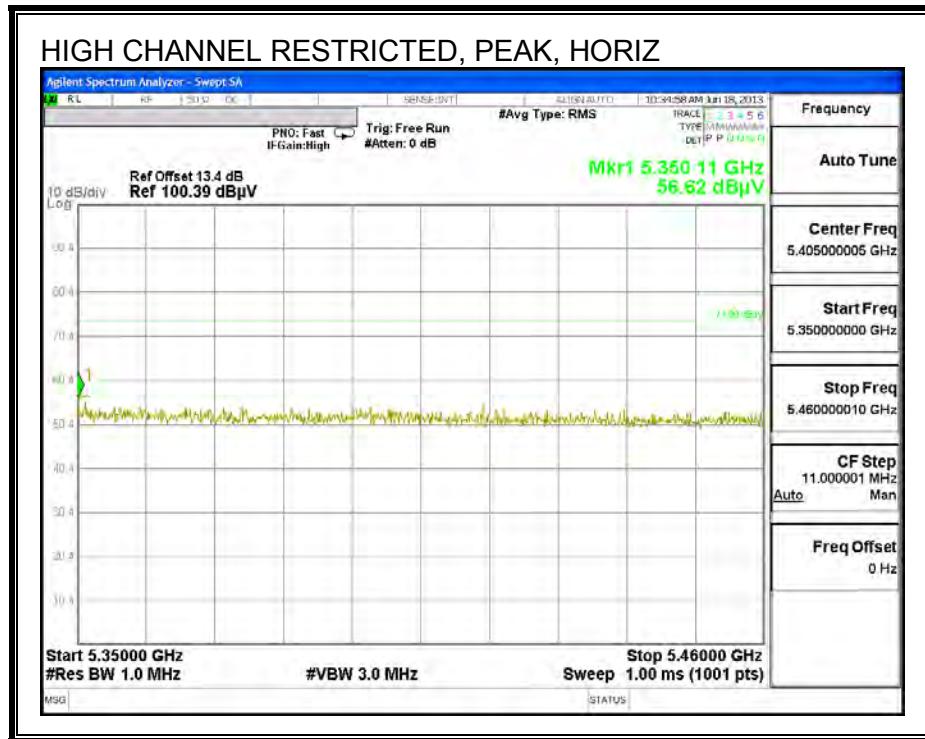

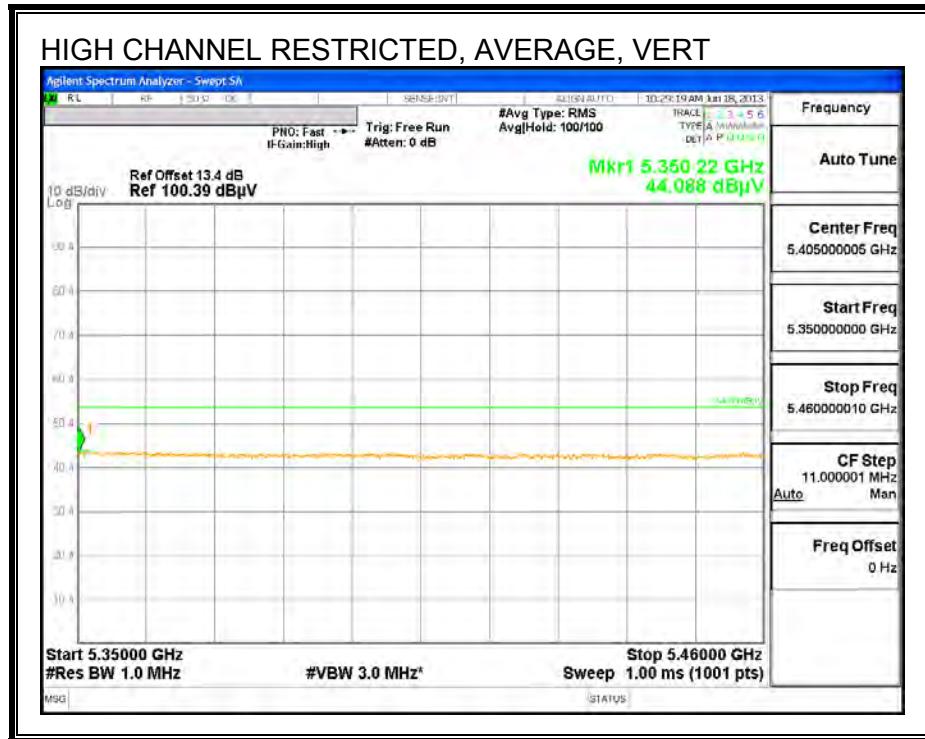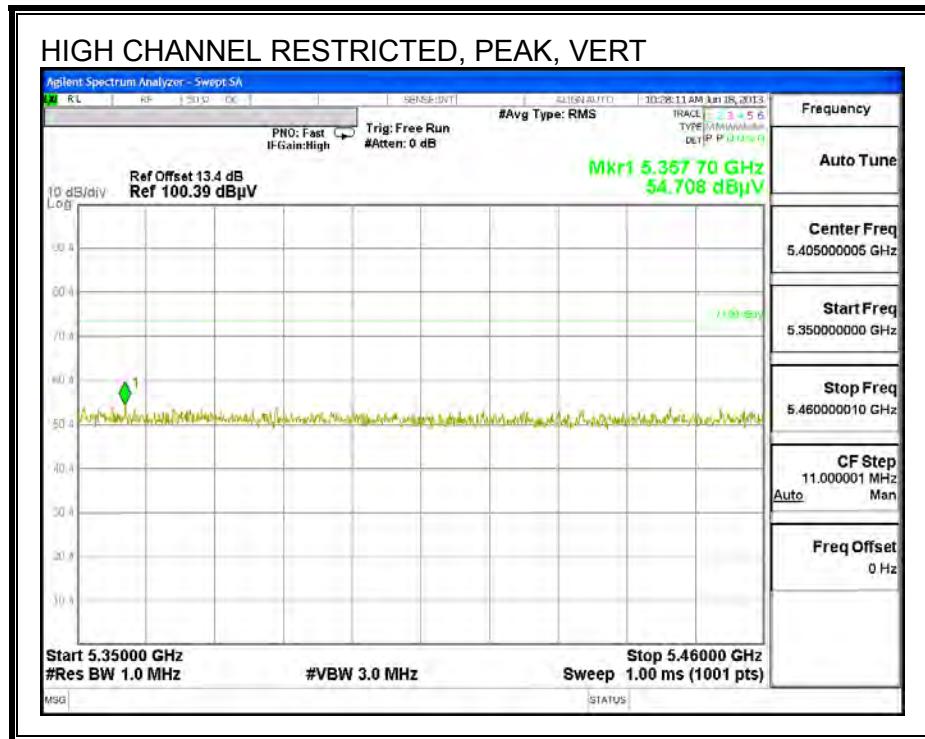



HARMONICS AND SPURIOUS EMISSIONS

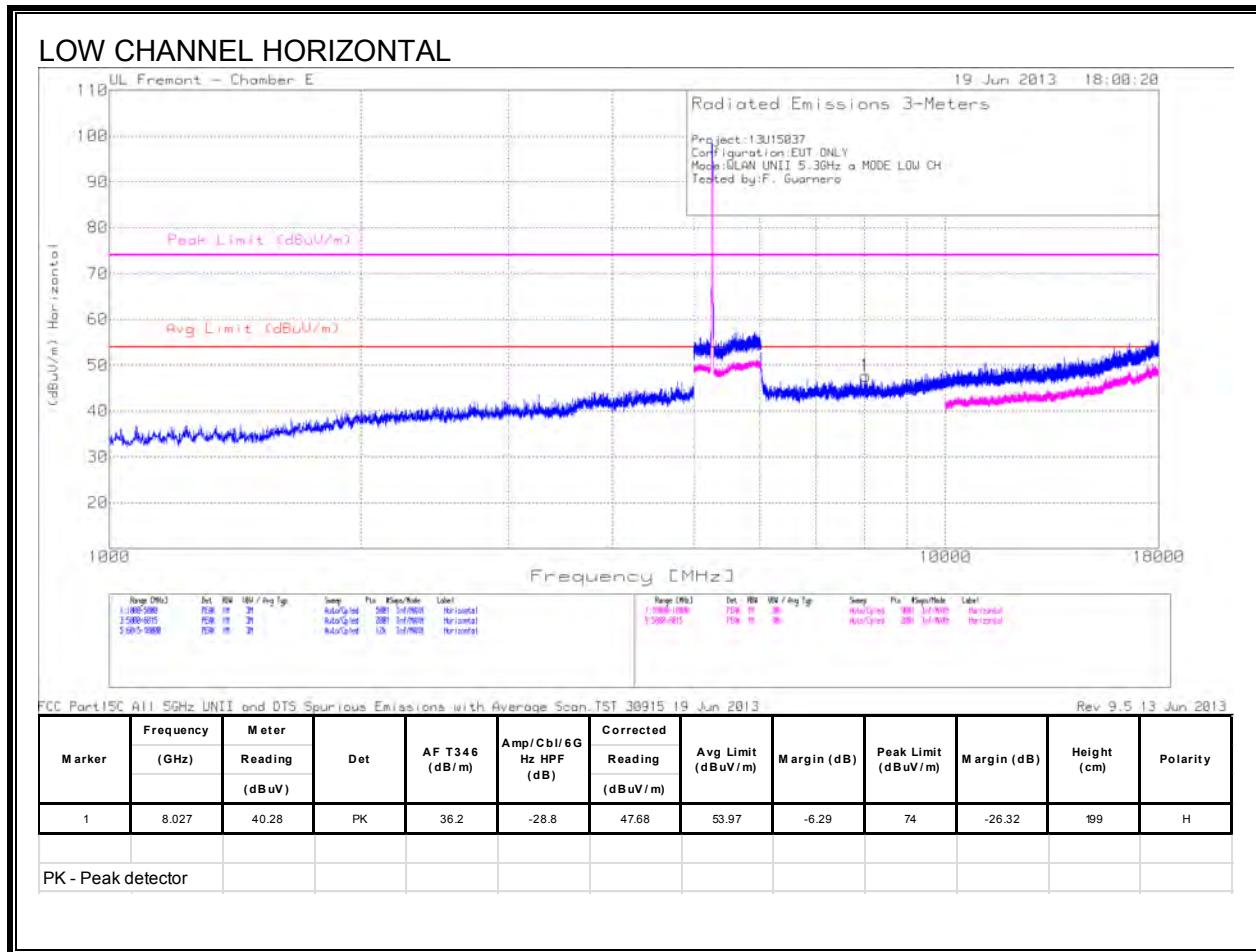


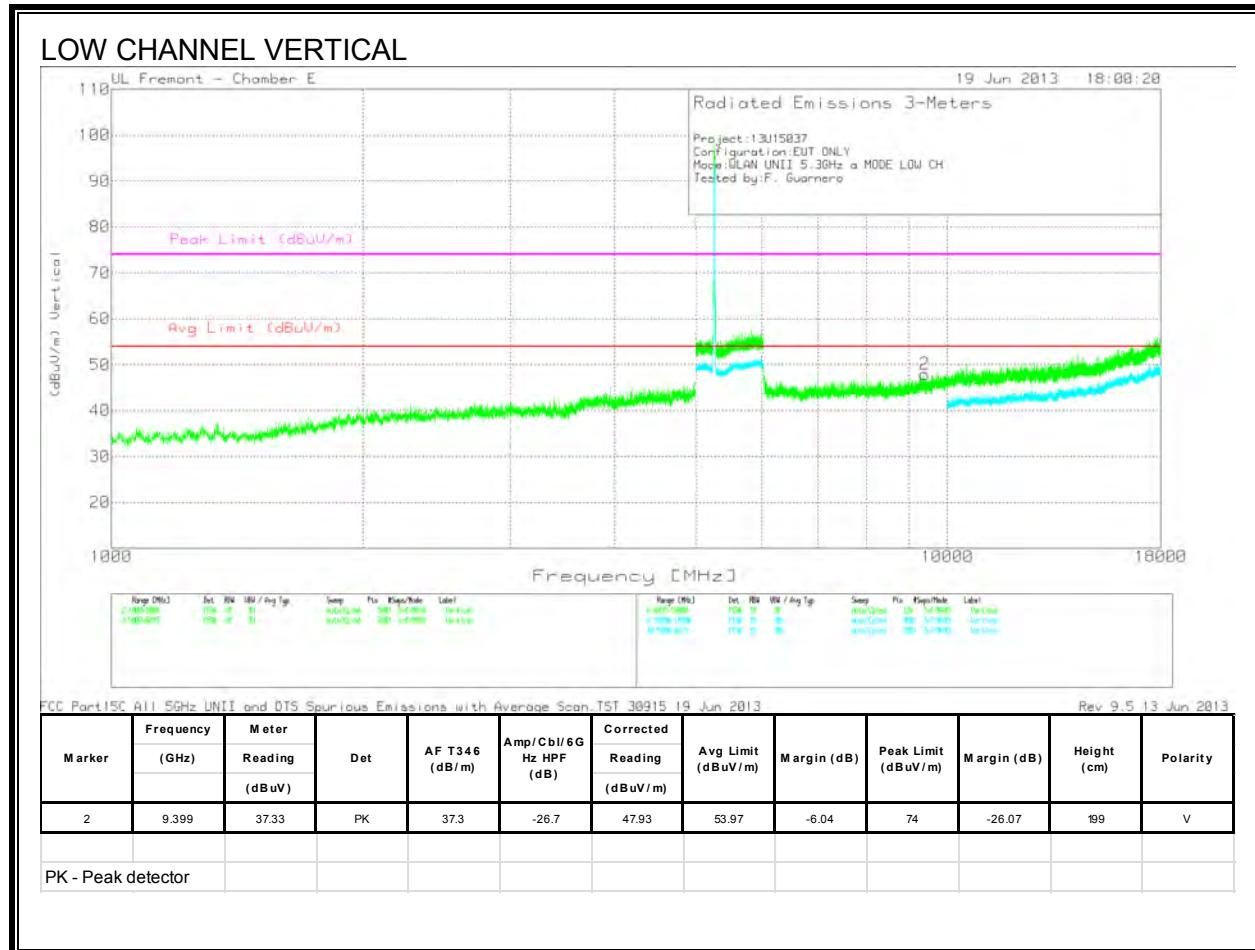


MID CHANNEL HORIZONTAL

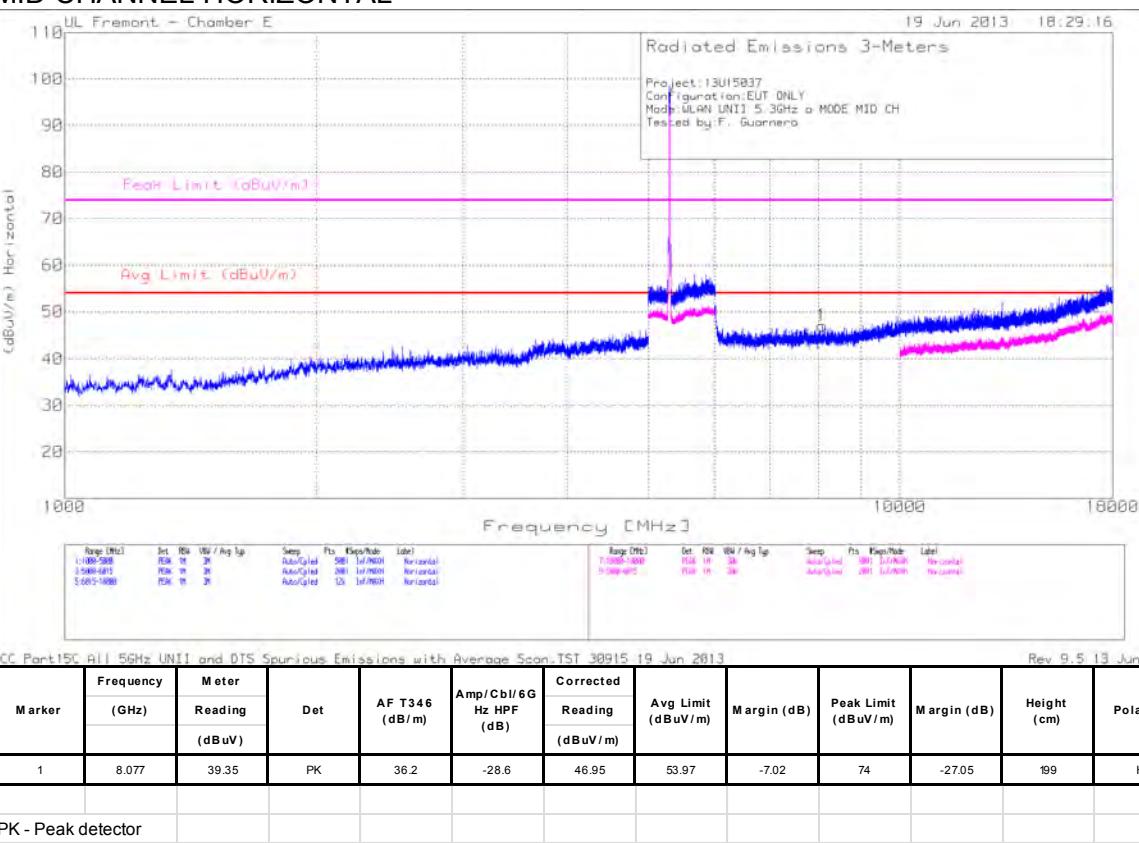

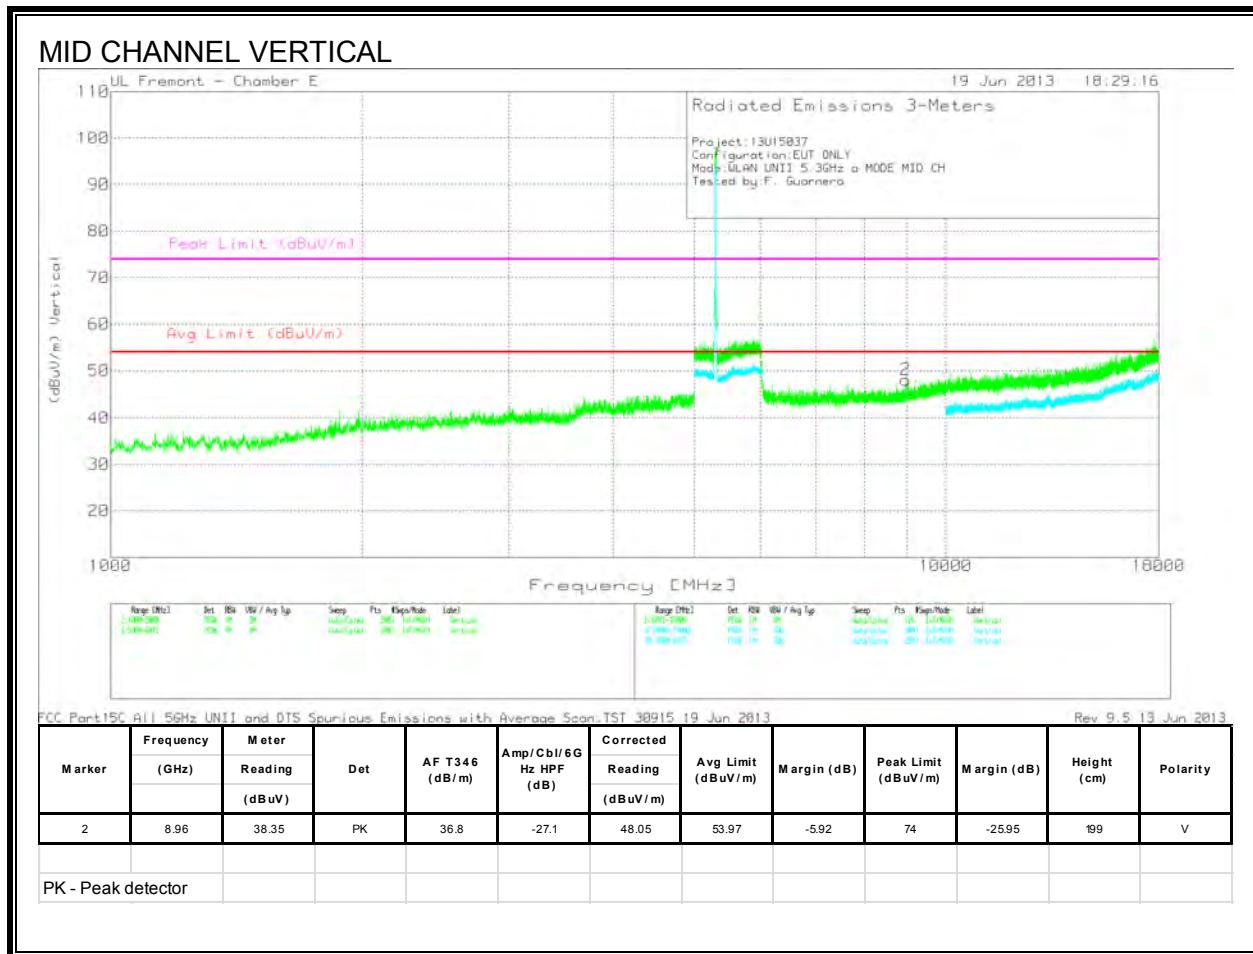

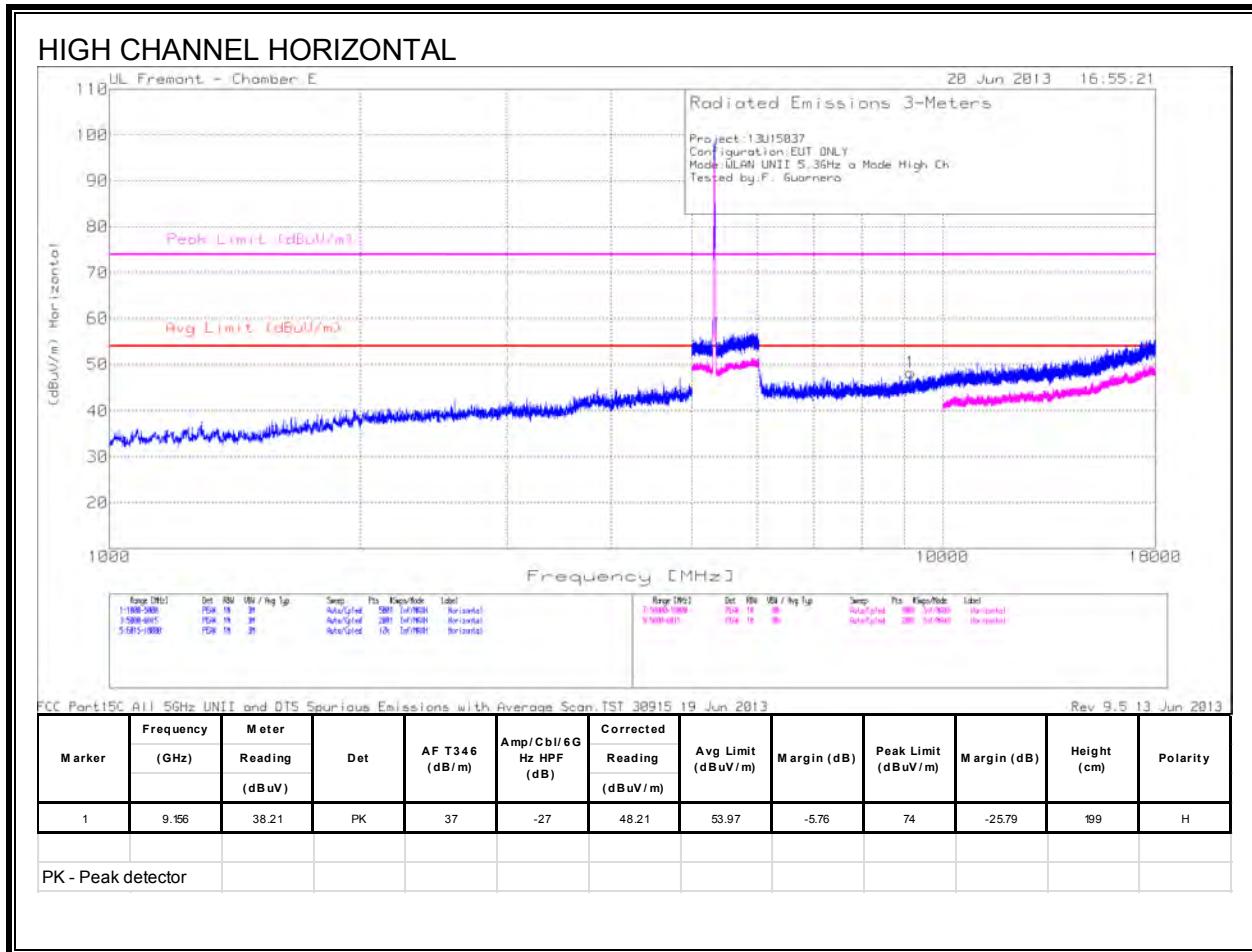

HIGH CHANNEL VERTICAL

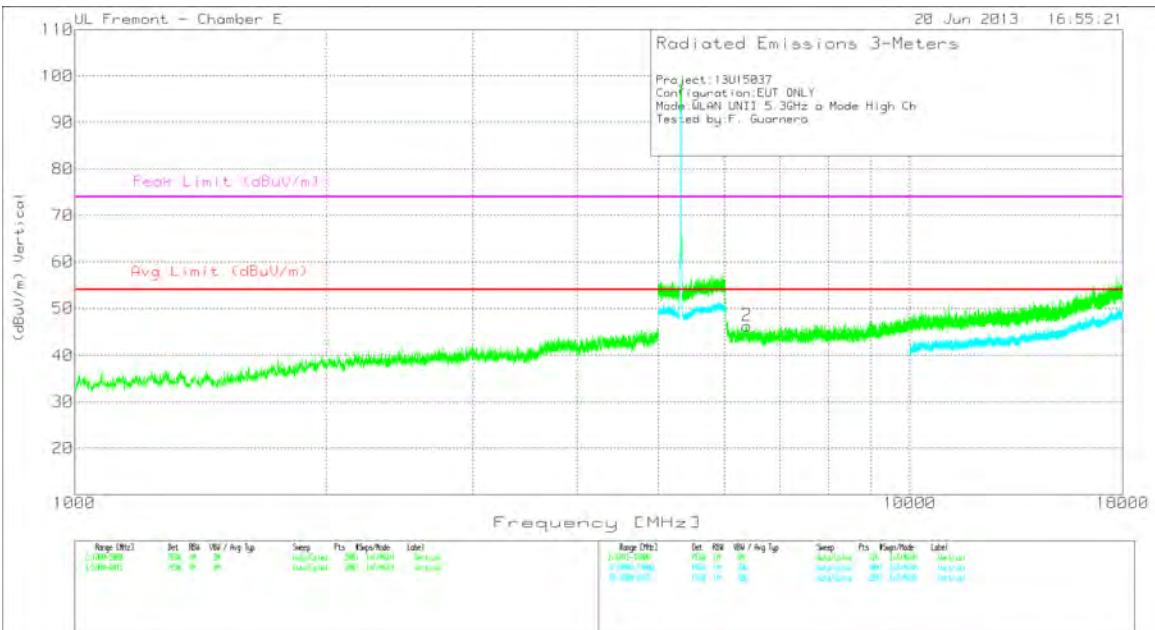



FCC Part 15C All 5GHz UNII and DTS Spurious Emissions with Average Scan-TST 38915 19 Jun 2013



Rev 9.5 13 Jun 2013

UL Port 1, H1, 5GHz UNT1 and UNT2 spurious emissions with Average Scan 15133091519 Jun 2013										Rev 4.3.13 Jun 2013		
Marker	Frequency	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6G Hz HPF (dB)	Corrected	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)	Reading				Reading						
	(dBuV)					(dBuV / m)						
2	6.385	40.14	PK	35.8	-29.7	46.24	53.97	-7.73	74	-27.76	199	V


9.2.5. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

RESTRICTED BANEDGE (HIGH CHANNEL)

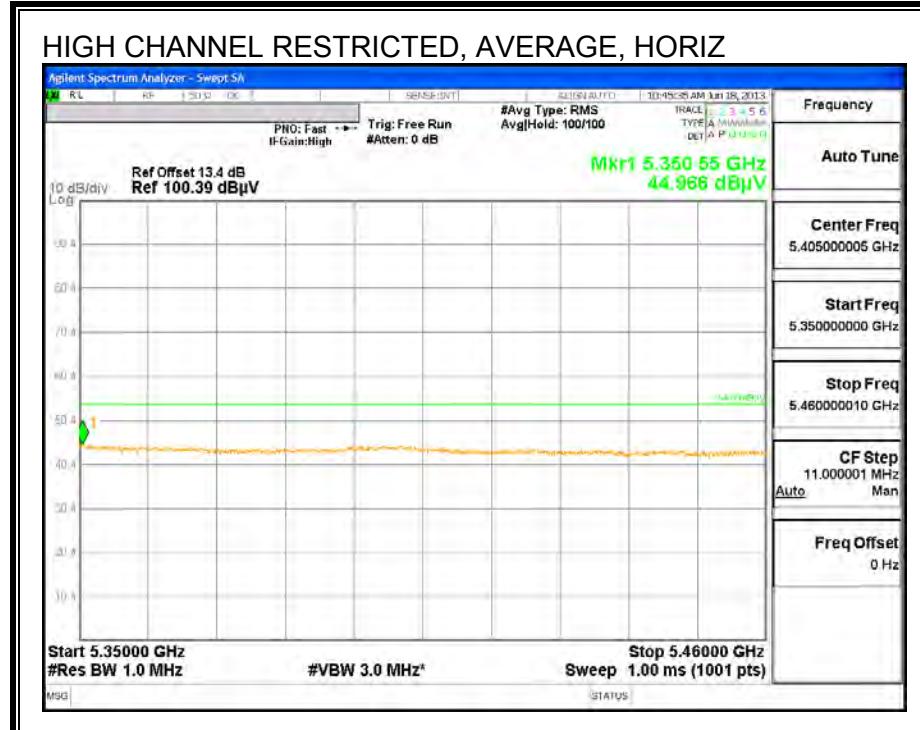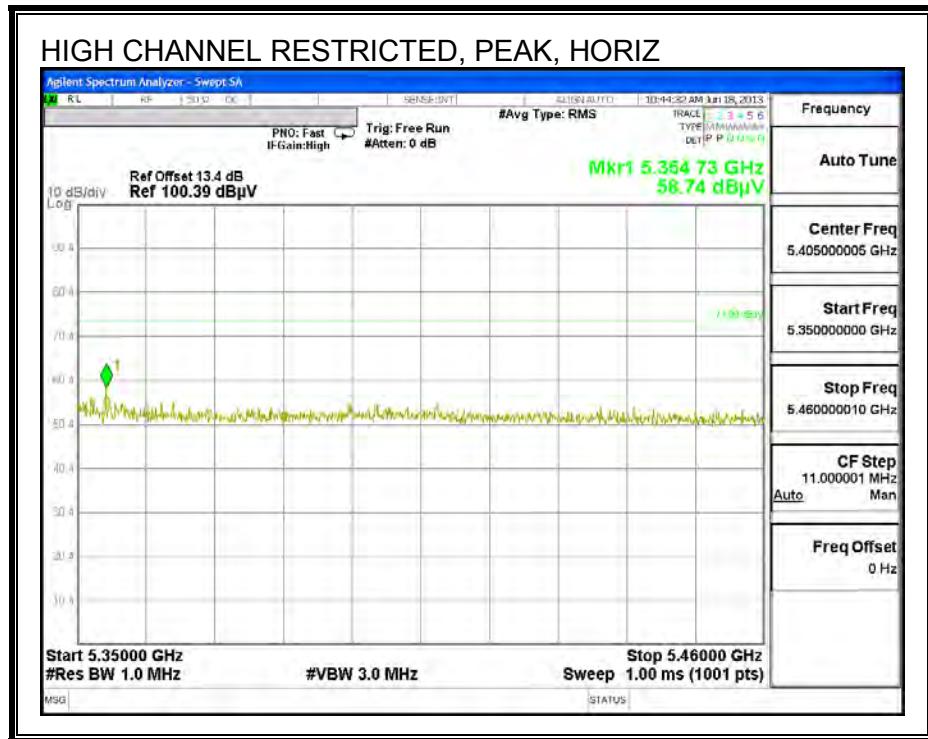


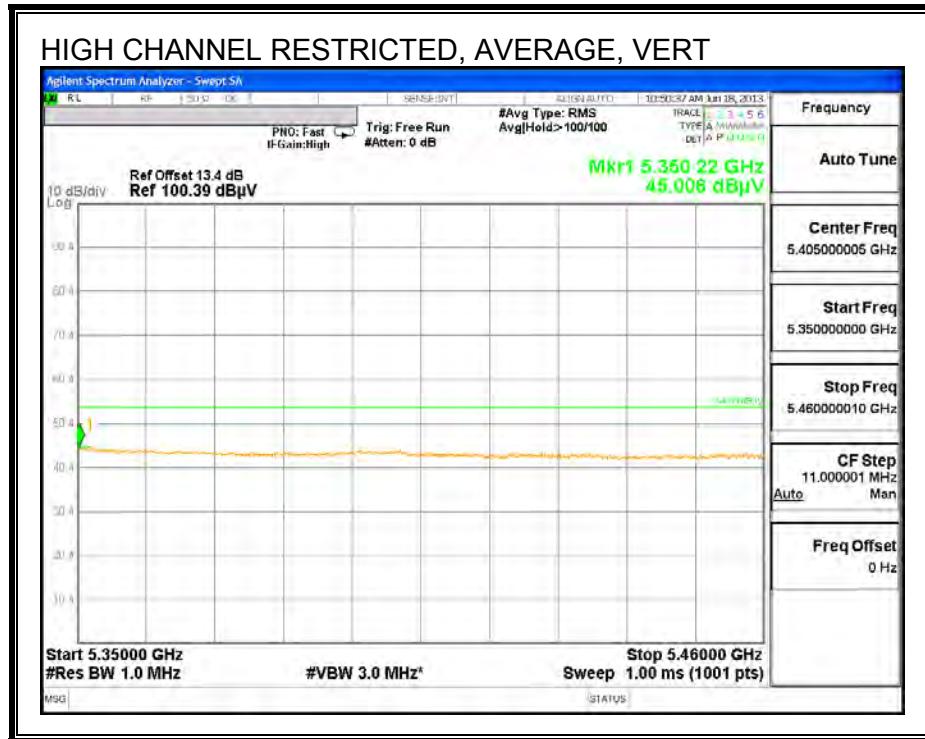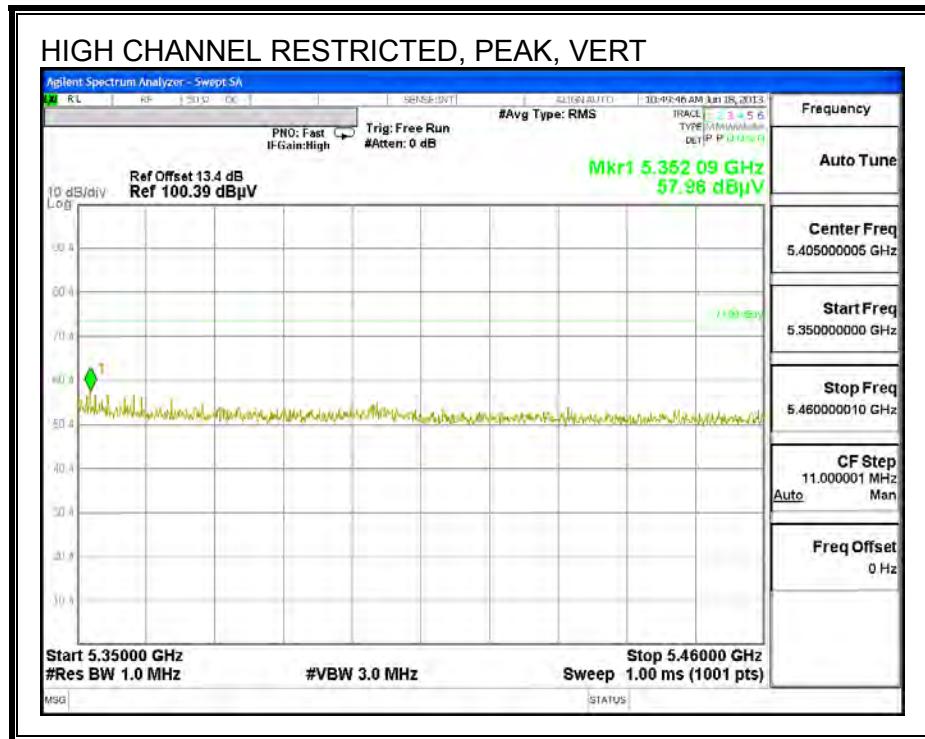



HARMONICS AND SPURIOUS EMISSIONS

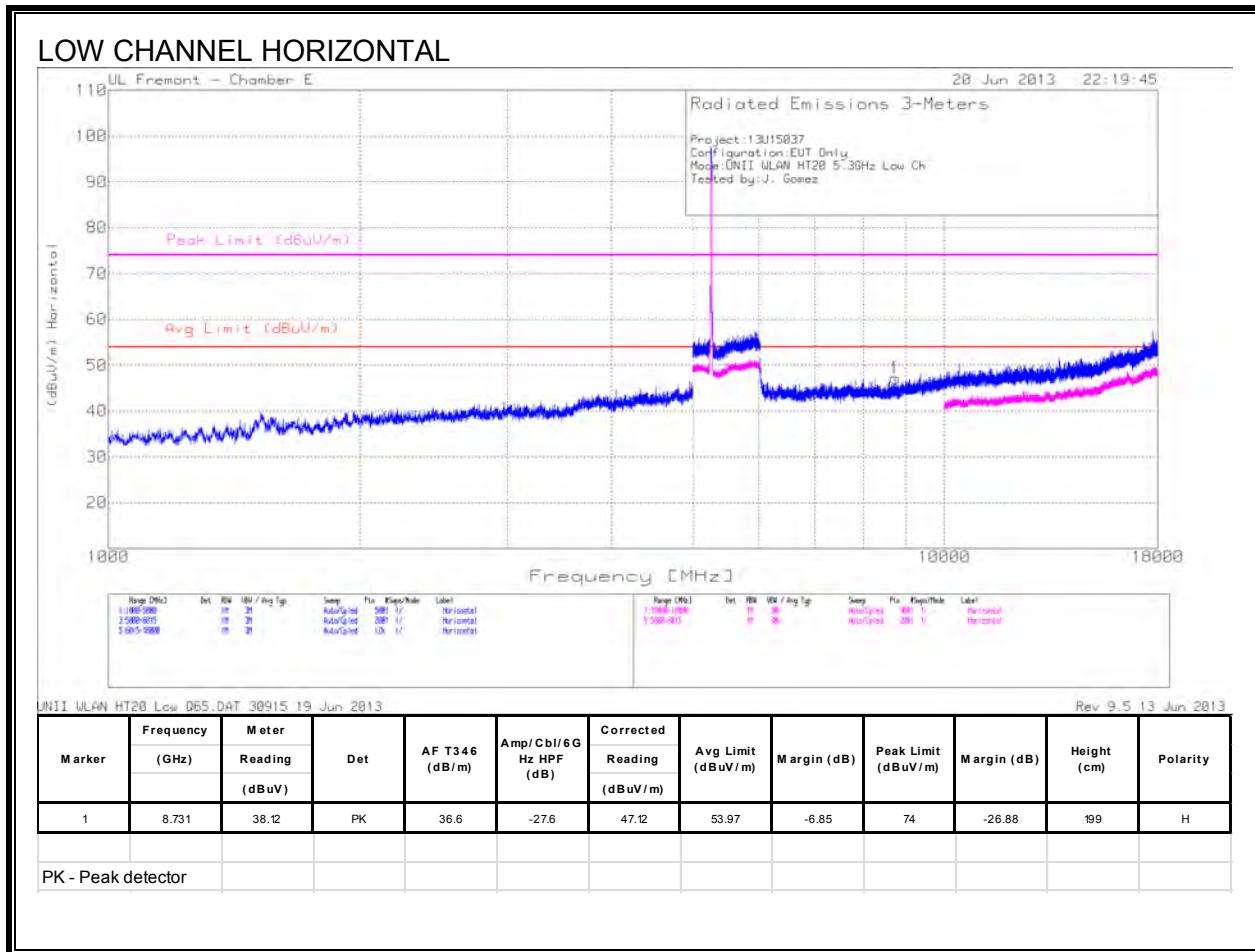


LOW CHANNEL VERTICAL

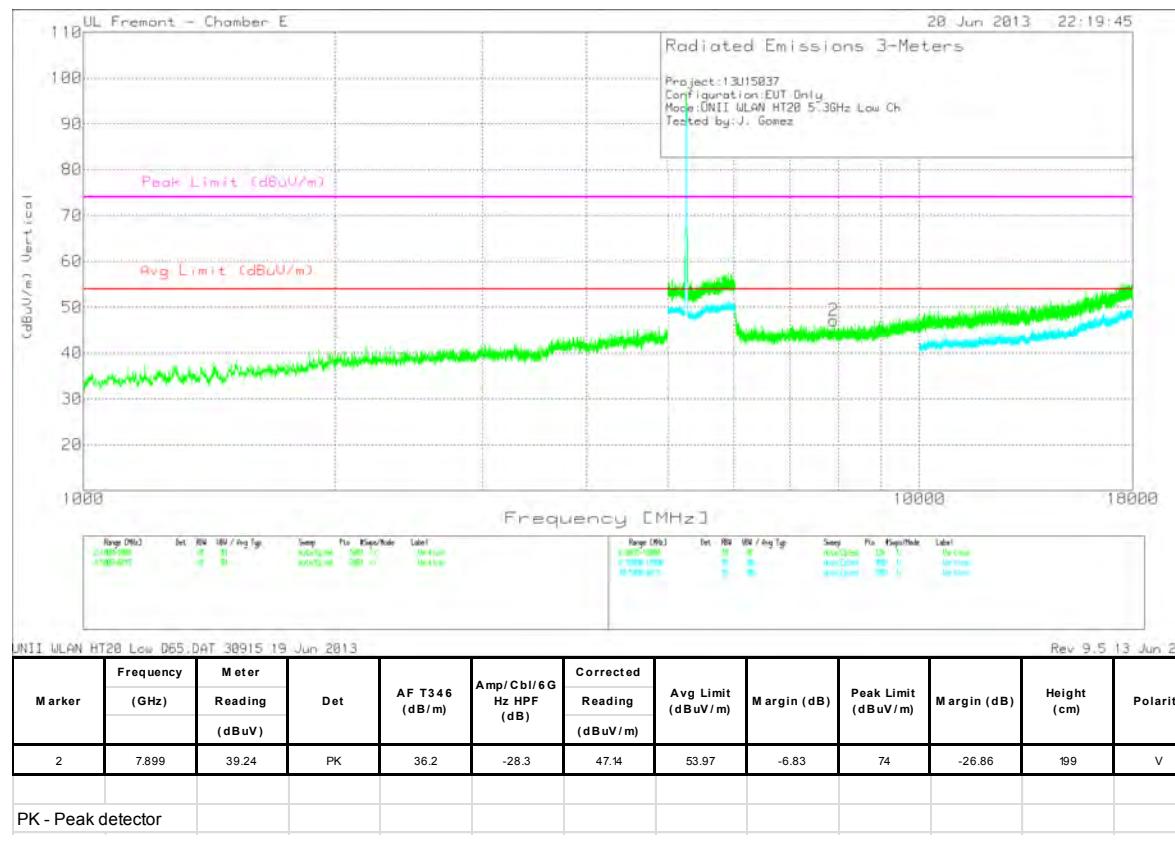


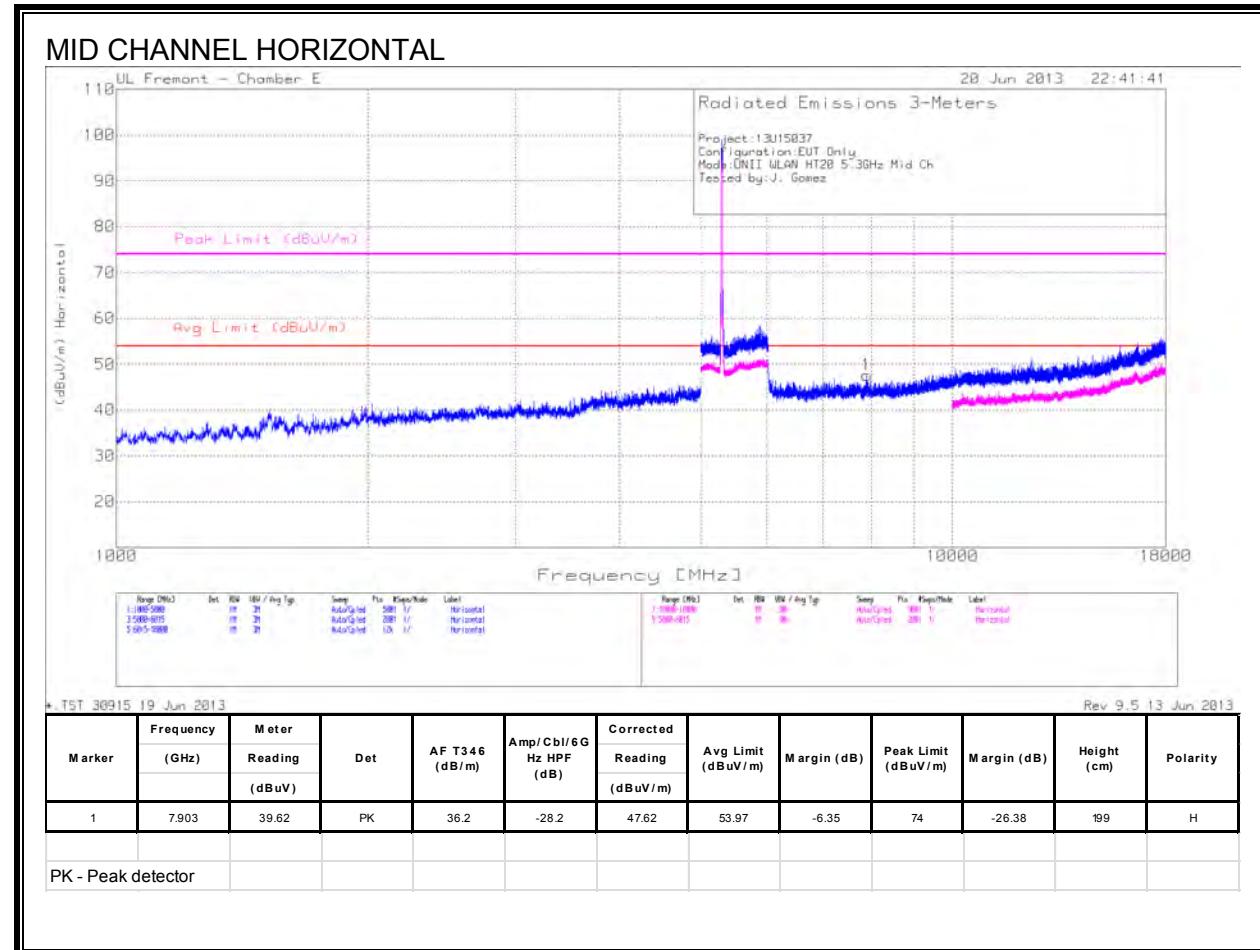

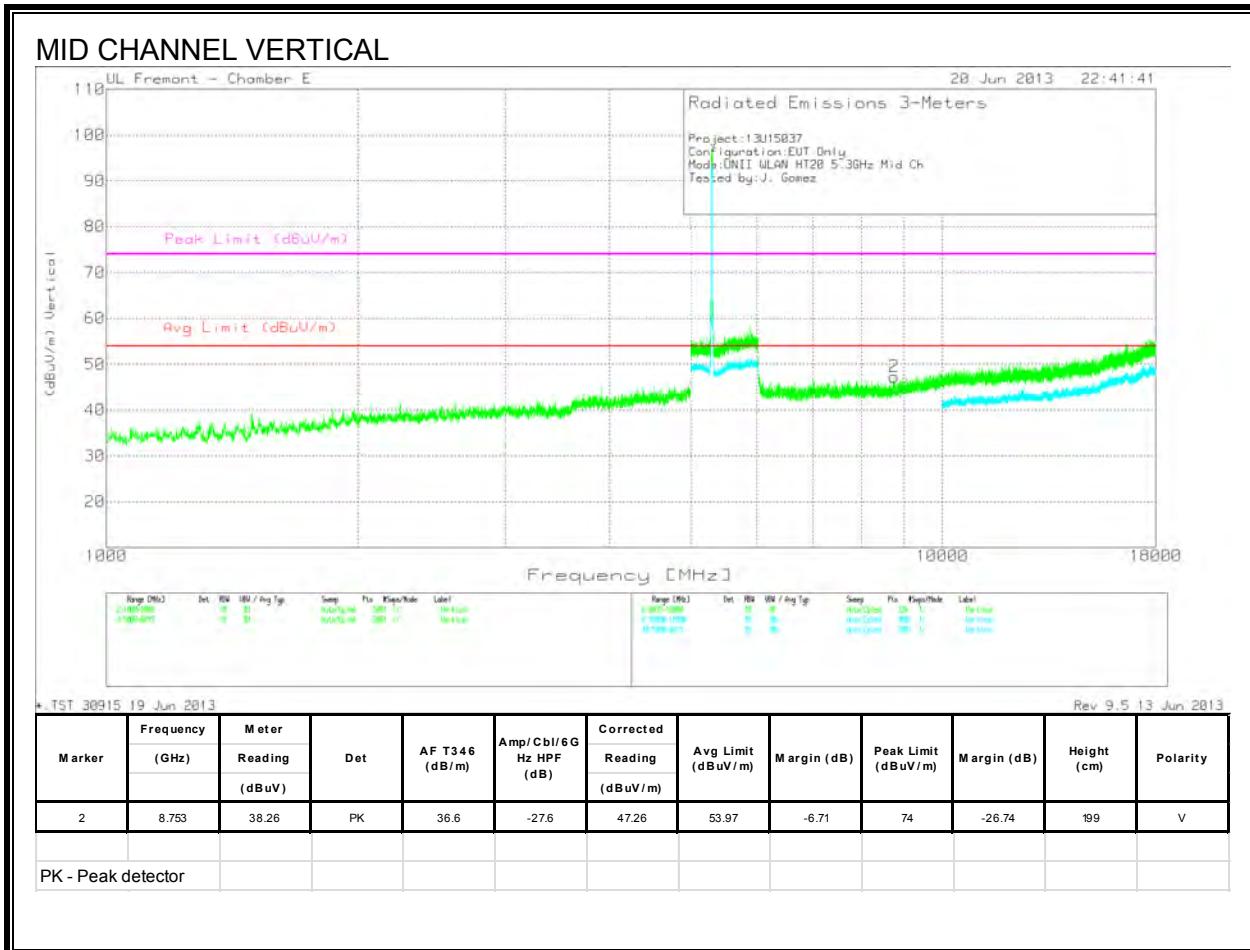

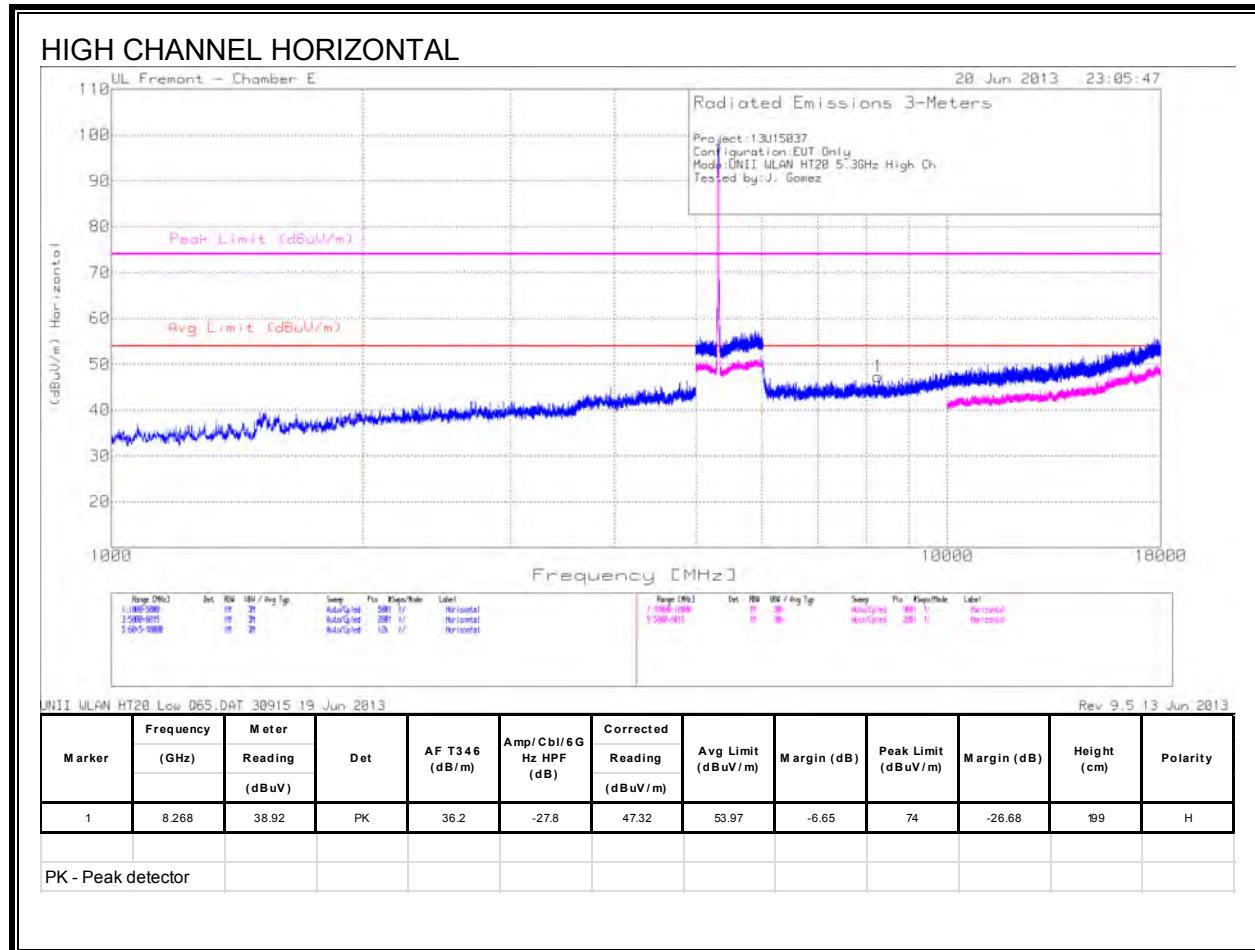



HIGH CHANNEL VERTICAL


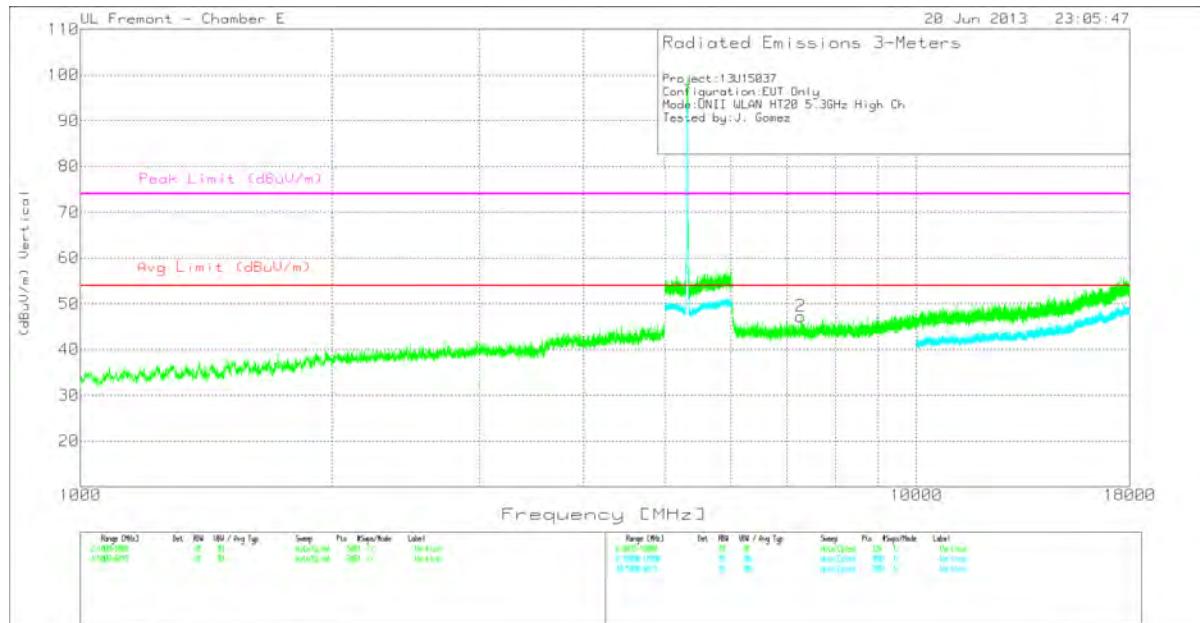


UNII_WLAN_HT28_Low_D65.DAT 30915 19 Jun 2013											Rev 9.5 13 Jun 2013	
Marker	Frequency	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6G Hz HPF (dB)	Corrected	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)	Reading				Reading						
		(dBuV)				(dBuV/m)						
2	7.272	40.16	PK	36	-28.9	47.26	53.97	-6.71	74	-26.74	199	V


9.2.6. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL)

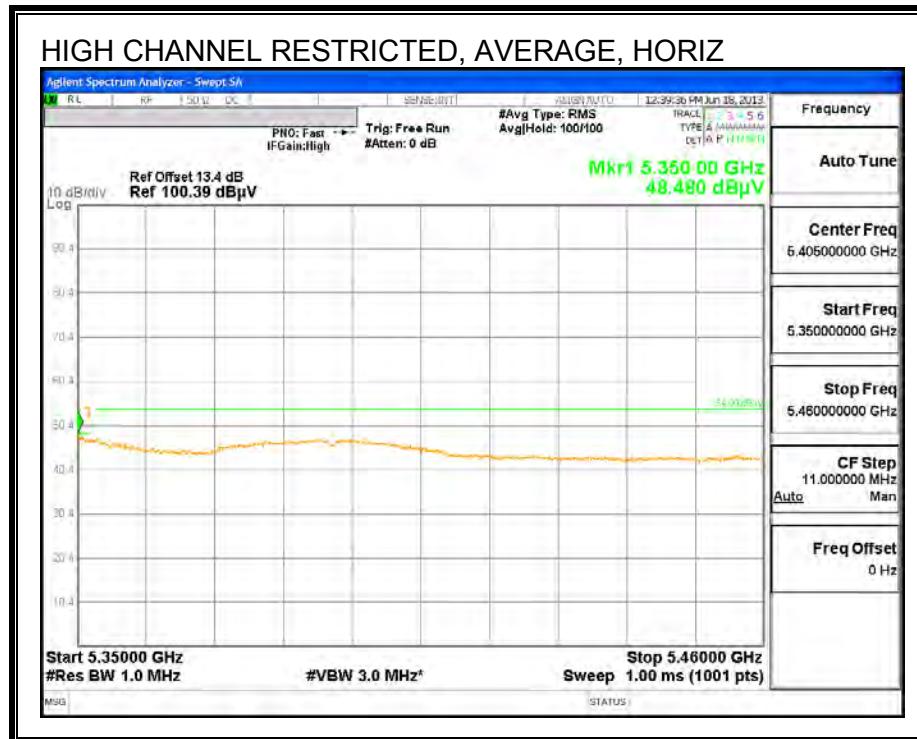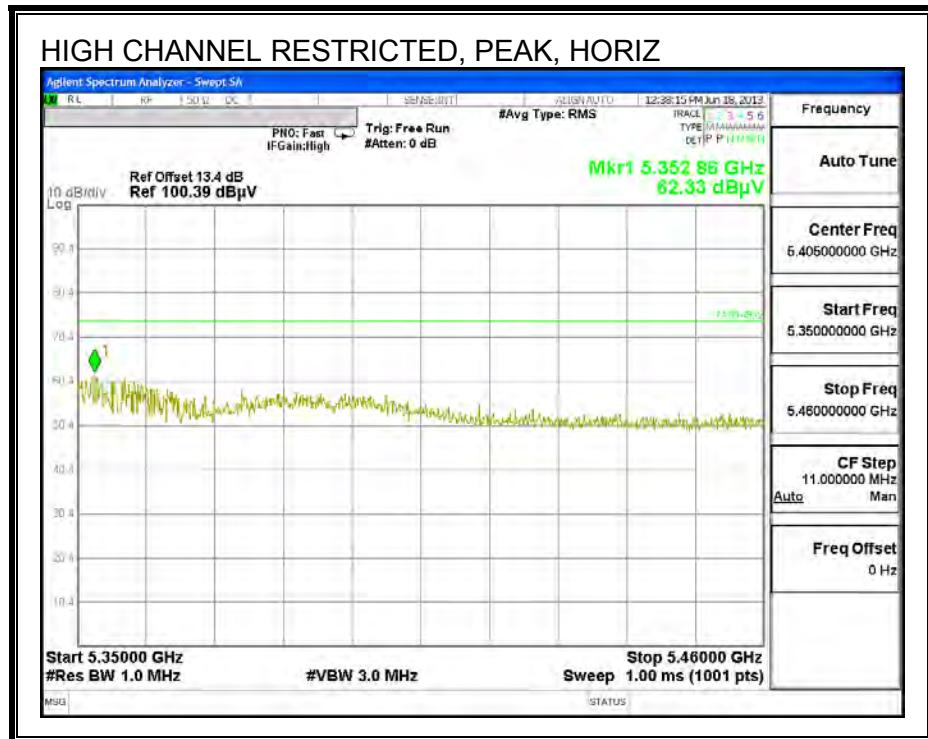


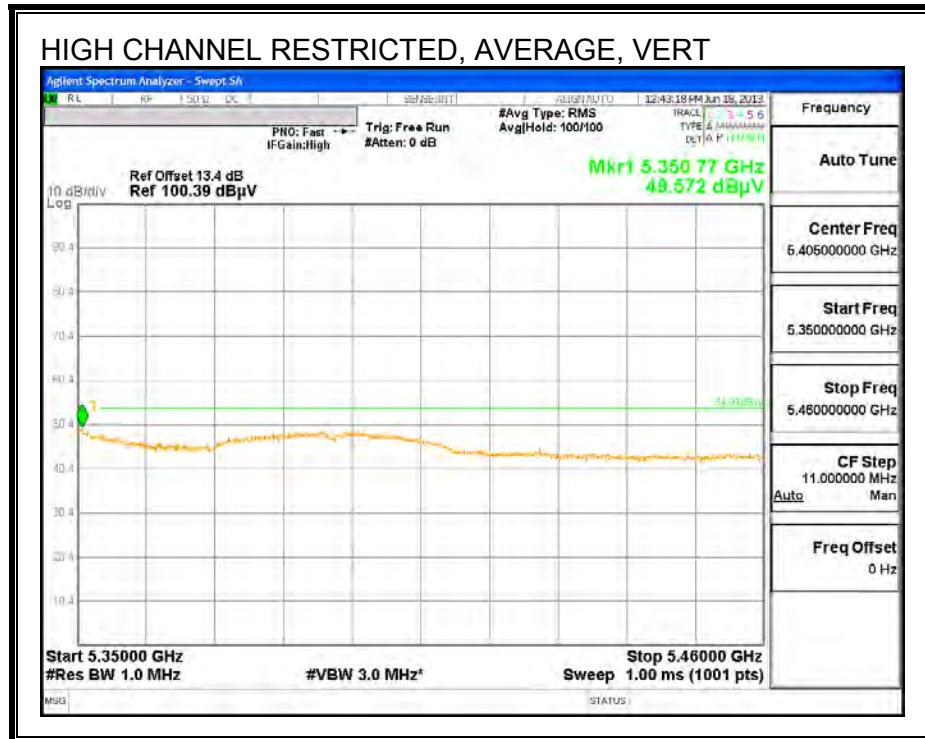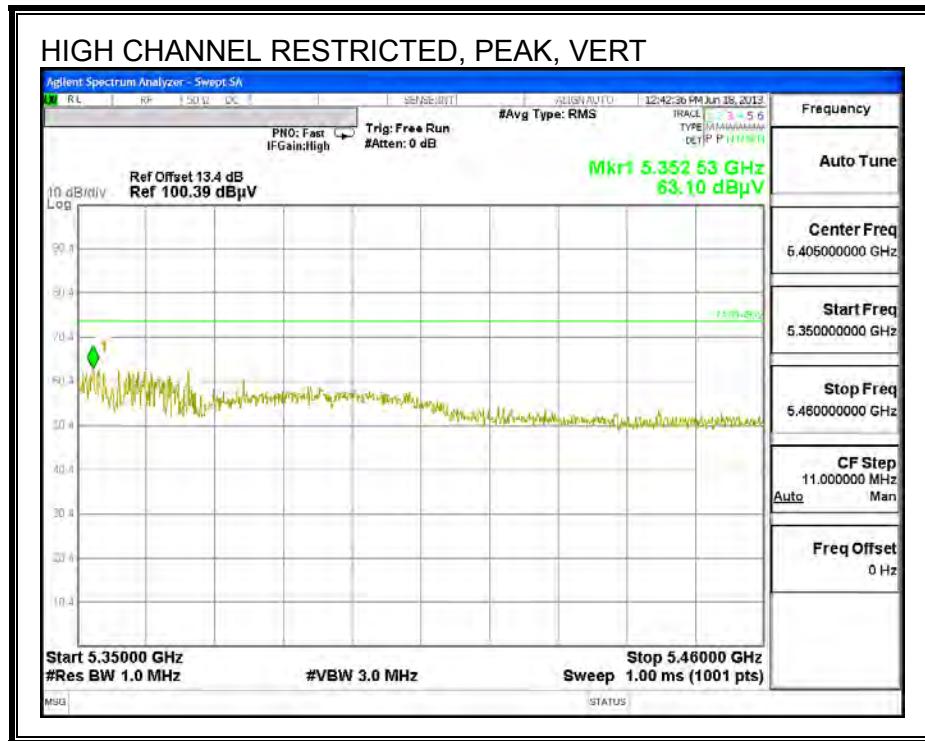

HARMONICS AND SPURIOUS EMISSIONS

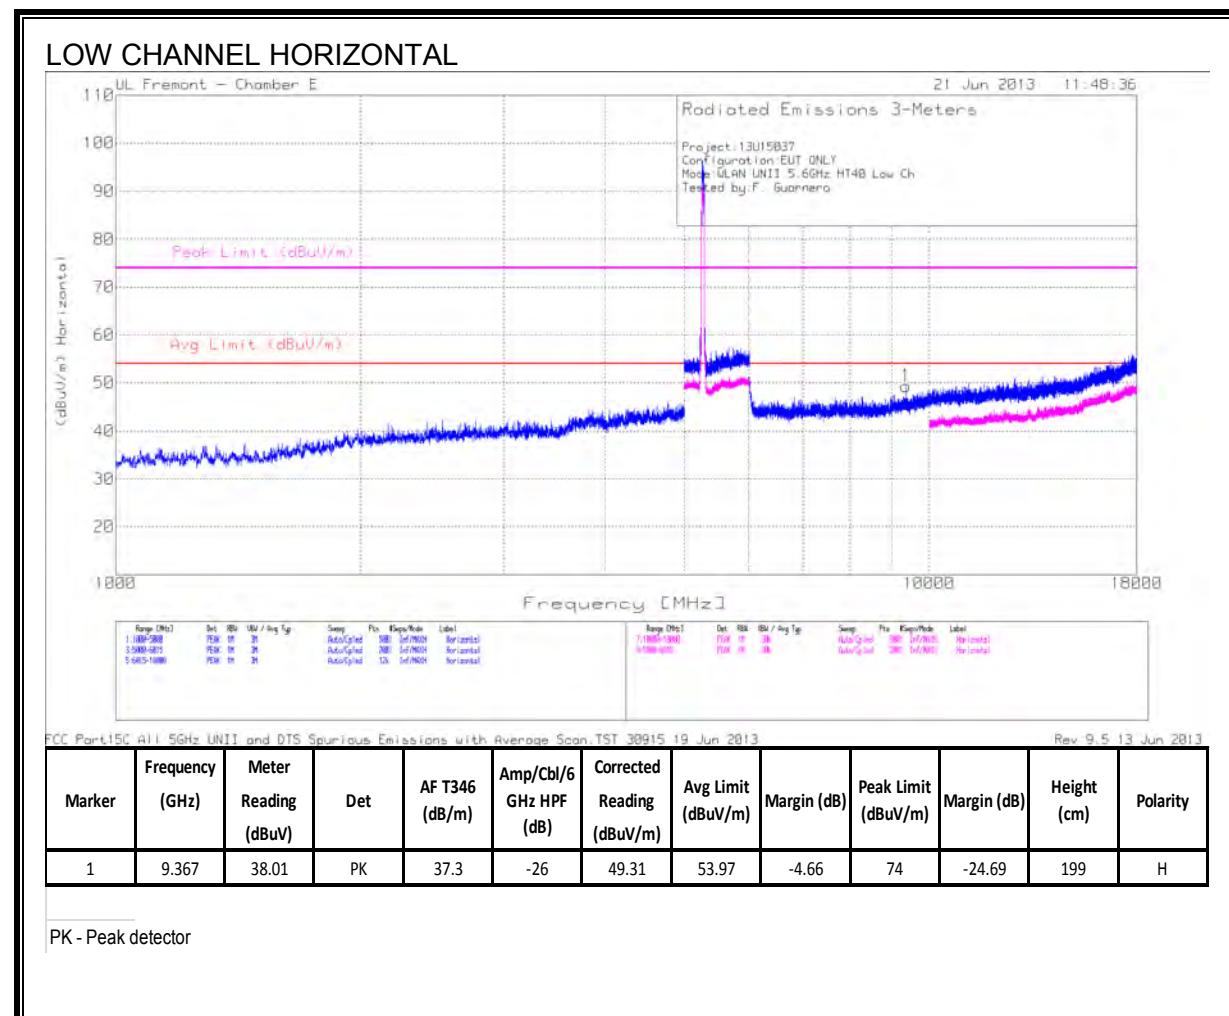

LOW CHANNEL VERTICAL

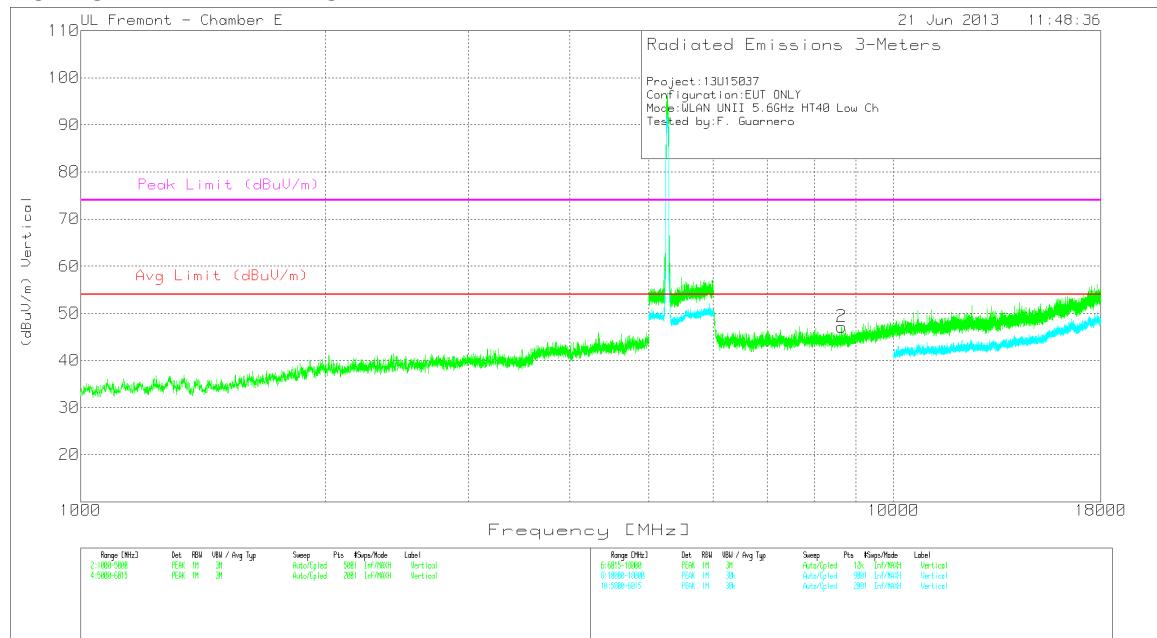


FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 19 Jun 2013

Rev 9.5 13 Jun 2013

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
2	8.635	38.27	PK	36.4	-27.5	47.17	53.97	-6.8	74	-26.83	199	V

PK - Peak detector

HIGH CHANNEL HORIZONTAL

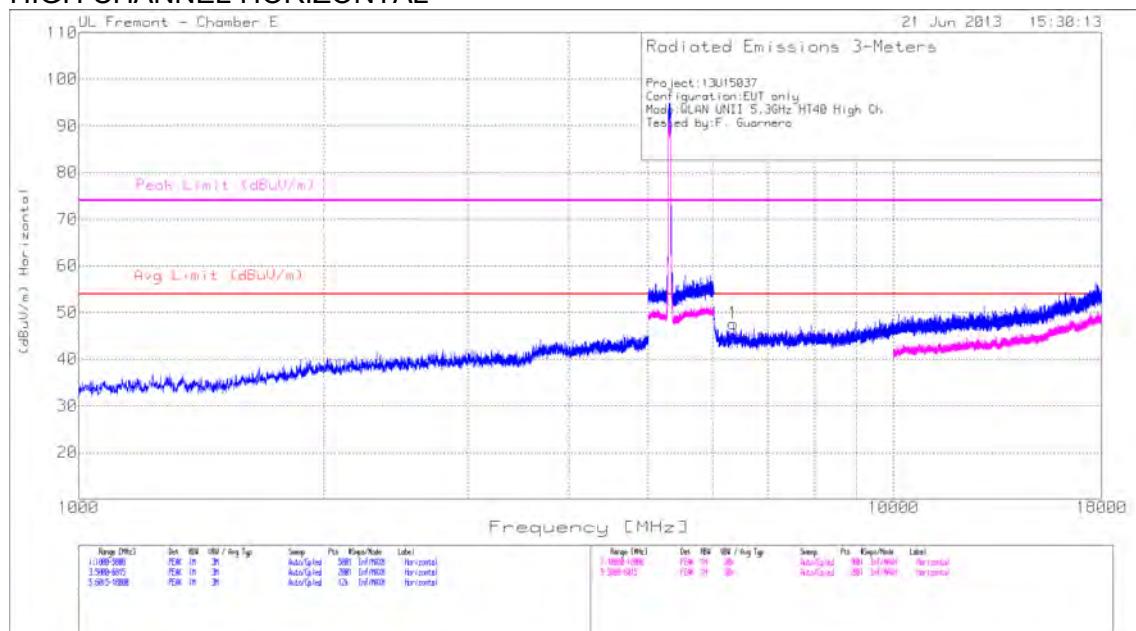

FCC Part 15C All 5GHz UNII and DTS Spurious Emissions with Average Scan TST 38915 19 Jun 2013

Rev 9.5 13 Jun 2013

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
1	6.355	40.72	PK	35.9	-29	47.62	53.97	-6.35	74	-26.38	199	H

PK - Peak detector

HIGH CHANNEL VERTICAL



FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 38915 19 Jun 2013



Rev 9.5 13 Jun 2013



Marker	Frequency	Meter	Det	AF T346 (dBuV)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)	Reading (dBuV)										
2	6.902	40.8	PK	35.9	-29.8	46.9	53.97	-7.07	74	-27.1	199	V

PK - Peak detector



9.2.7. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND

RESTRICTED & AUTHORIZED BANEDGE (LOW CHANNEL)

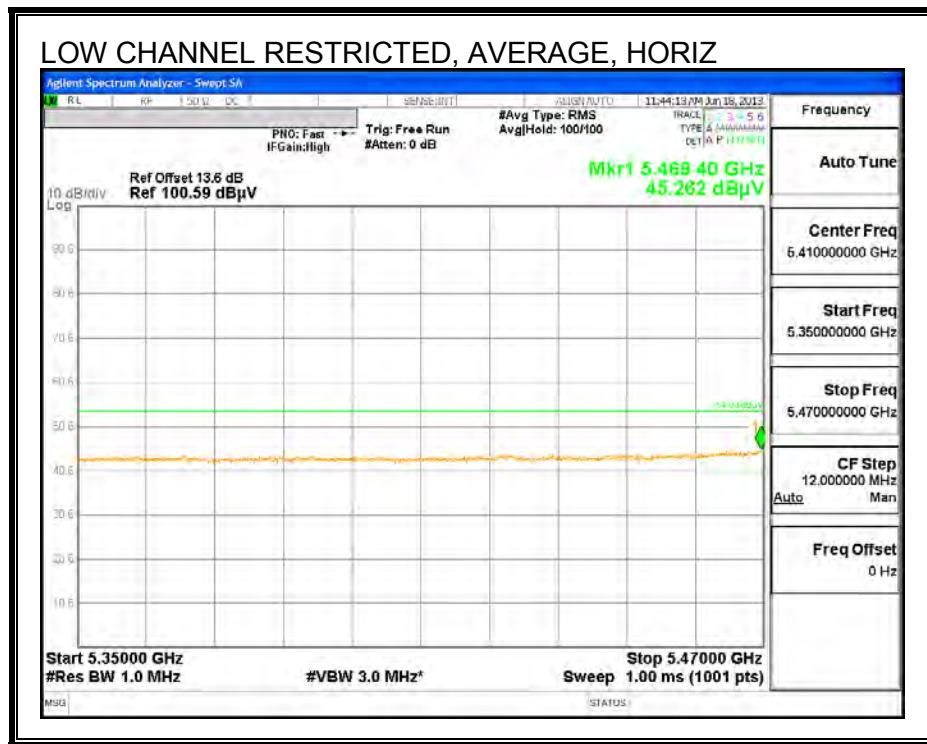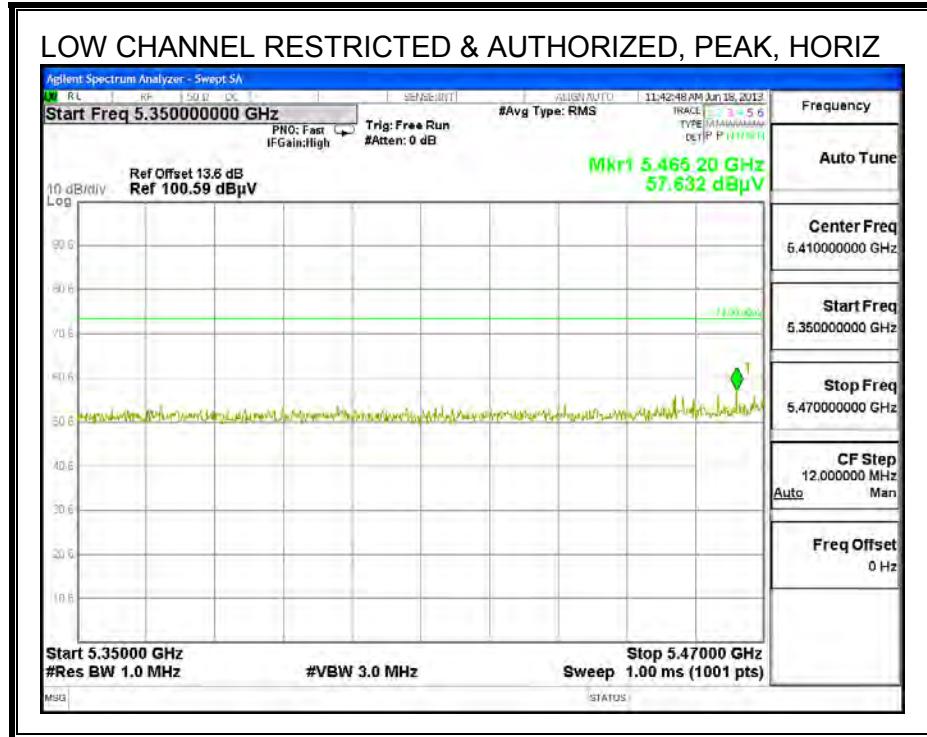


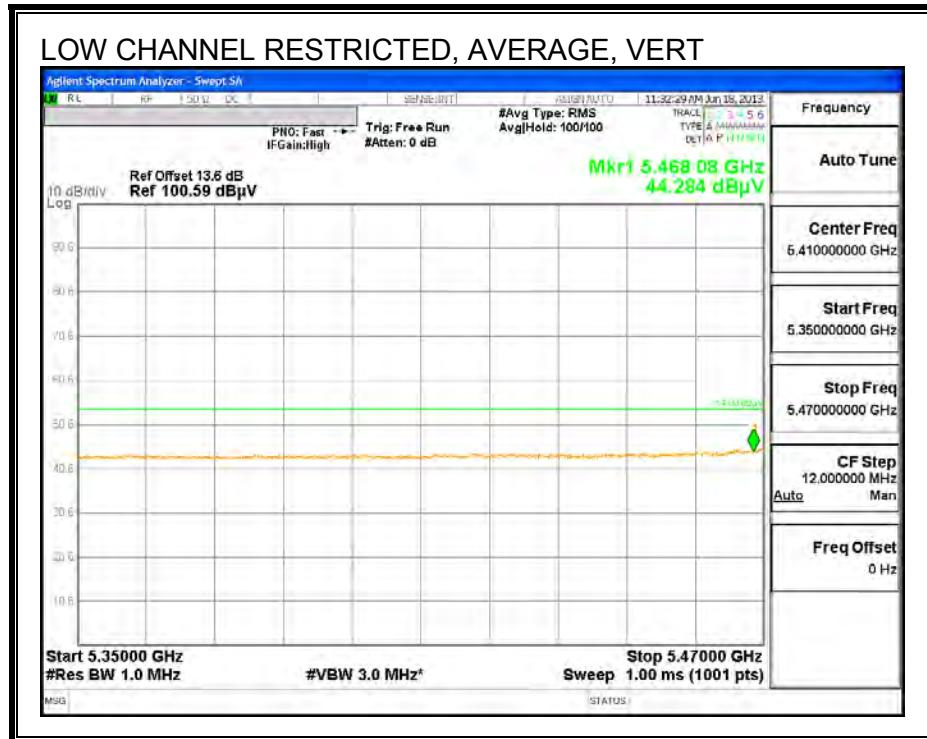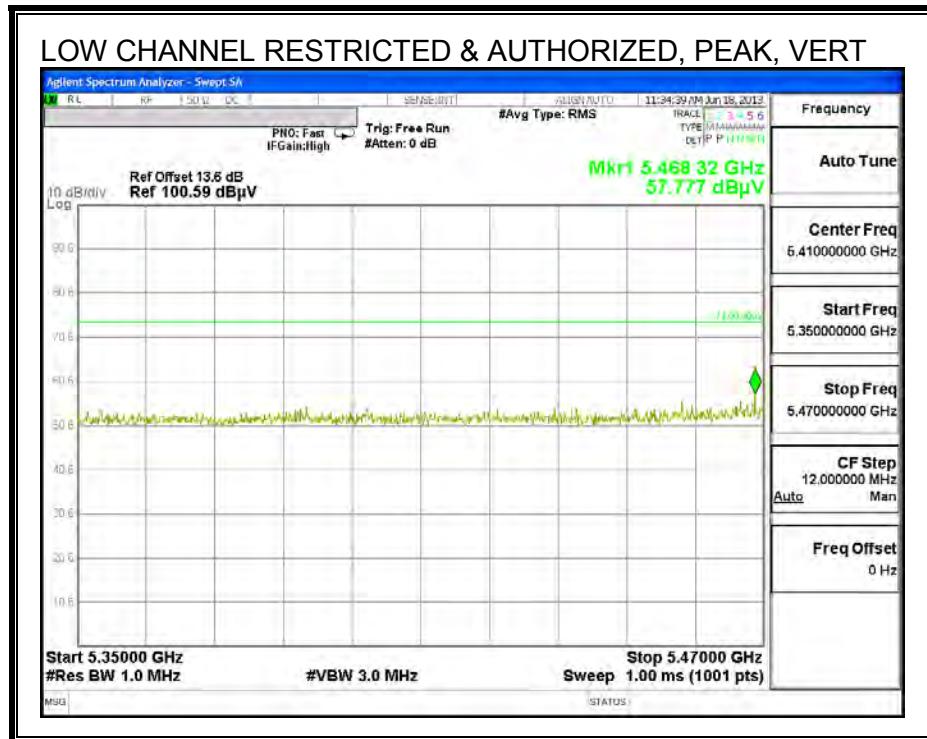


AUTHORIZED BANDEDGE (HIGH CHANNEL)

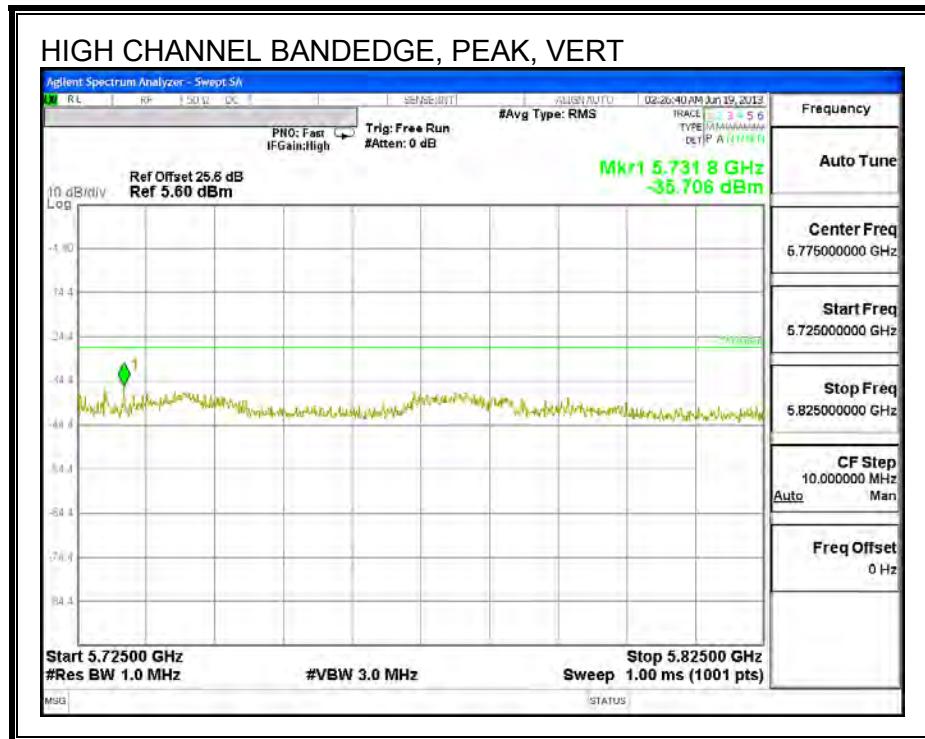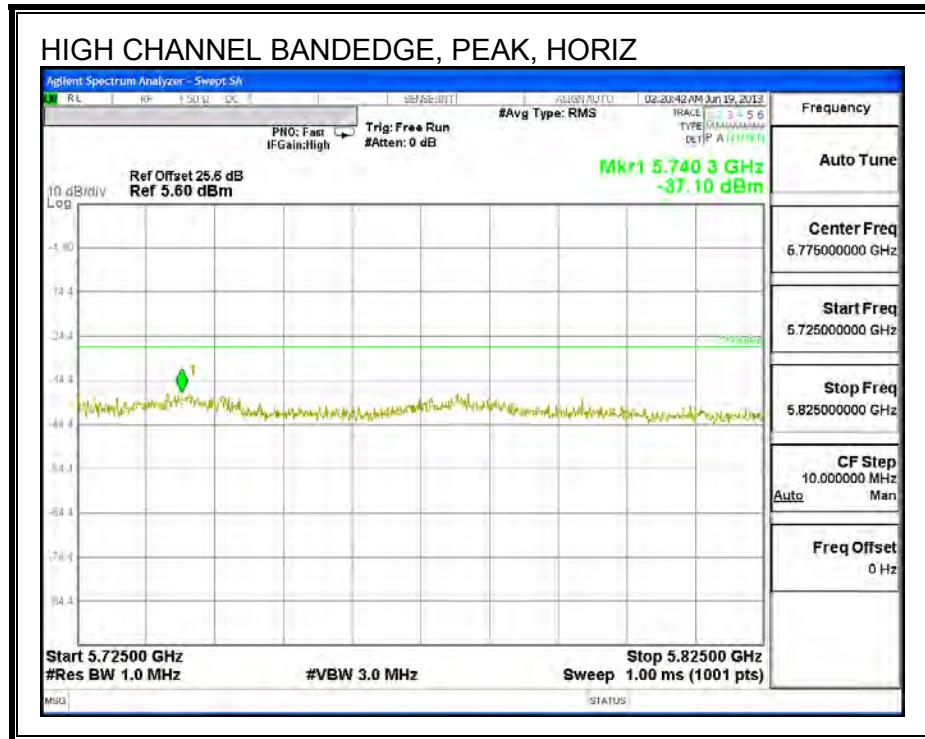

HARMONICS AND SPURIOUS EMISSIONS

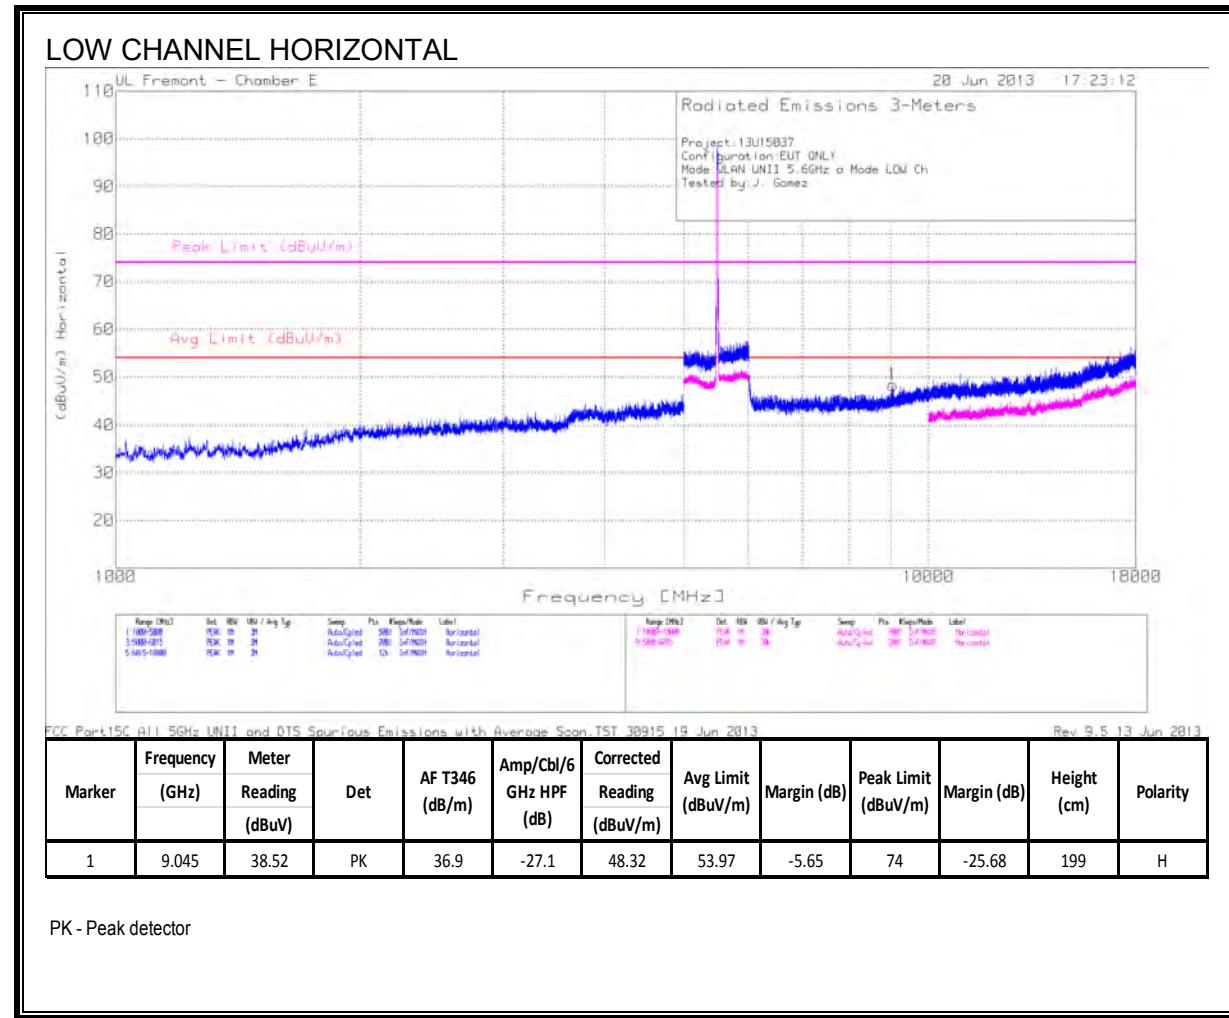

LOW CHANNEL VERTICAL

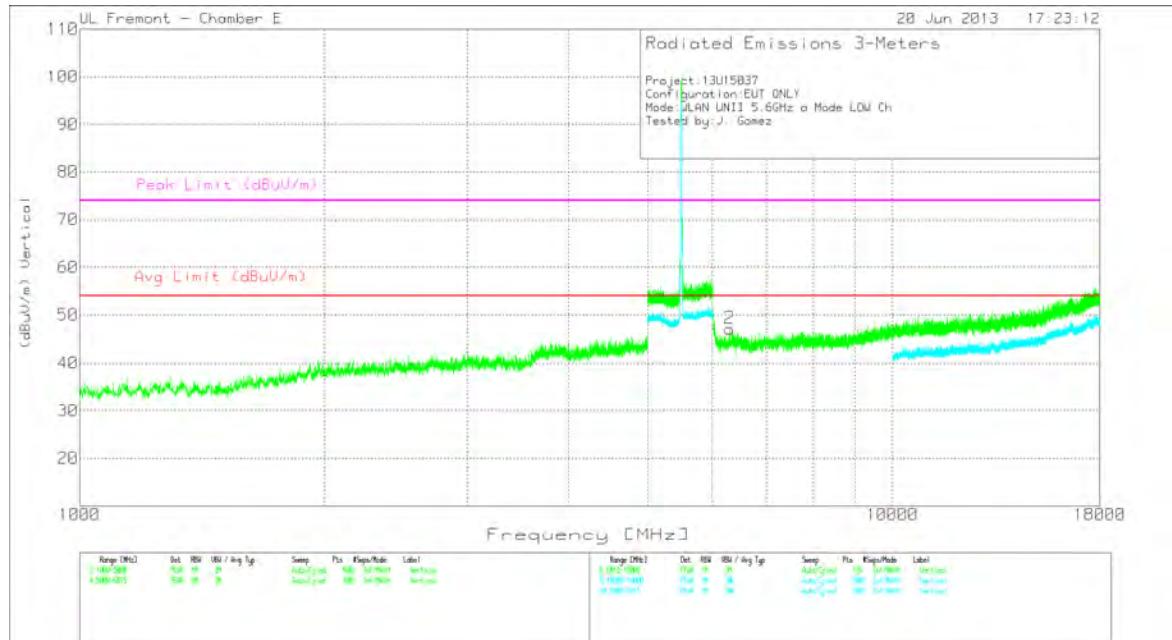


FCC Part 15C All 5GHz UNII and RTS Spurious Emissions with Average Scan TST 38915 19 Jun 2013

Rev 9.5 13 Jun 2013


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
2	6.304	40.58	PK	35.9	-29.4	47.08	53.97	-6.89	74	-26.92	199	V

PK - Peak detector

MID CHANNEL HORIZONTAL

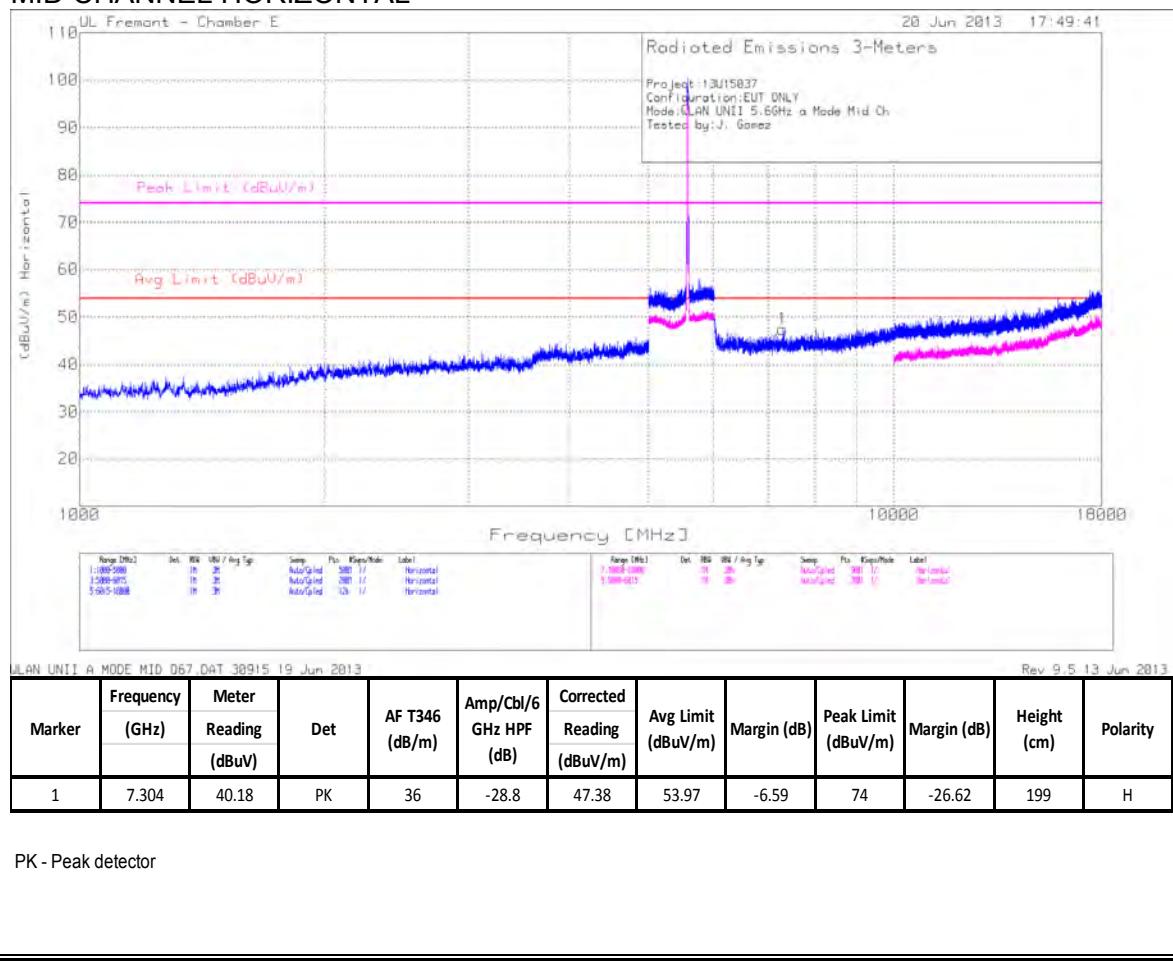


MID CHANNEL VERTICAL

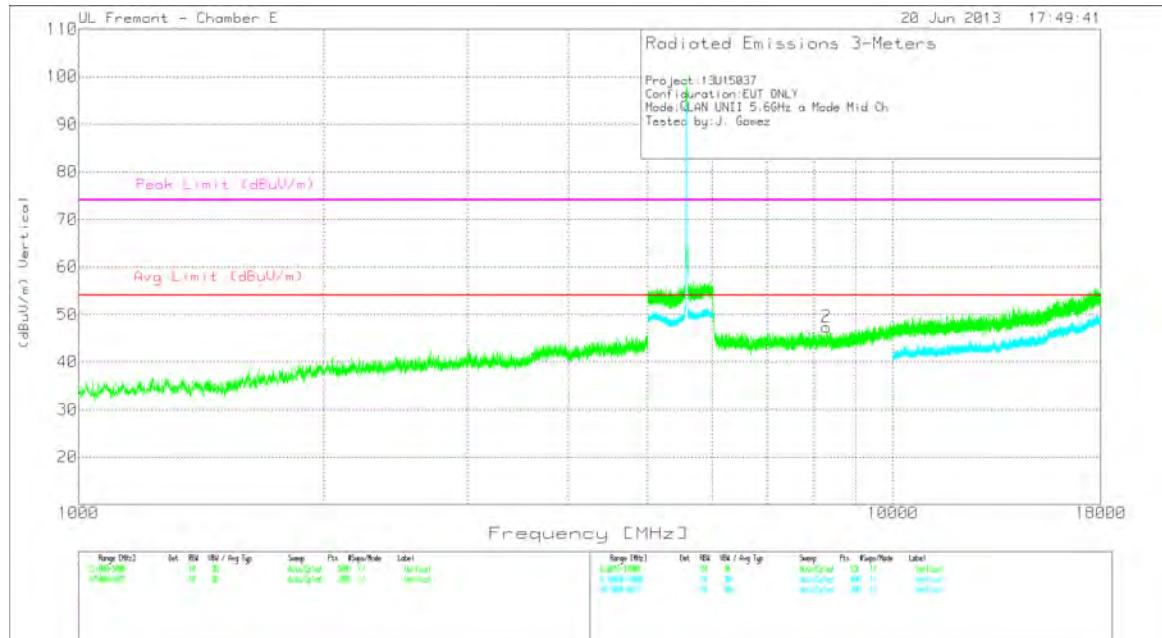


PK - Peak detector

Marker	Frequency	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)	Reading										
	(dBuV)											
2	8.287	38.91	PK	36.2	-27.8	47.31	53.97	-6.66	74	-26.69	199	V

HIGH CHANNEL HORIZONTAL

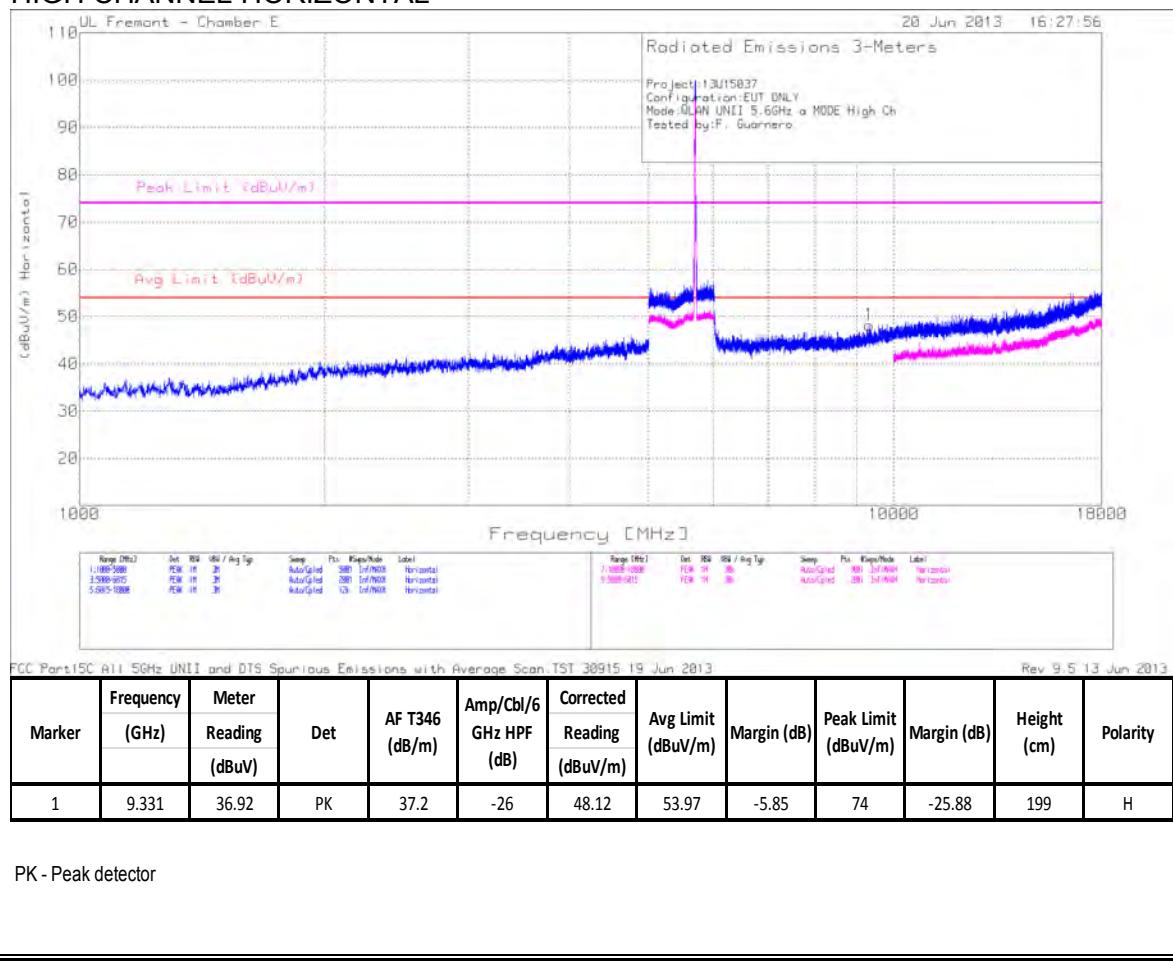

HIGH CHANNEL VERTICAL

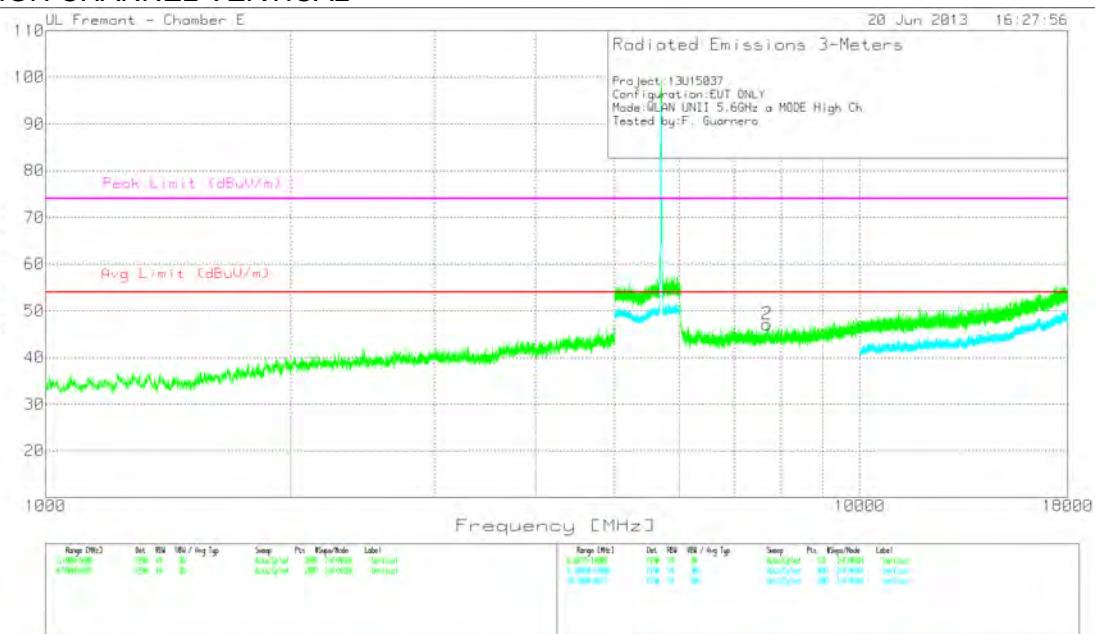

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan TST 38915 19 Jun 2013



Rev 9.5 13 Jun 2013



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
2	7.692	39.74	PK	36.2	-28.8	47.14	53.97	-6.83	74	-26.86	199	V

PK - Peak detector



9.2.8. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

RESTRICTED & AUTHORIZED BANEDGE (LOW CHANNEL)

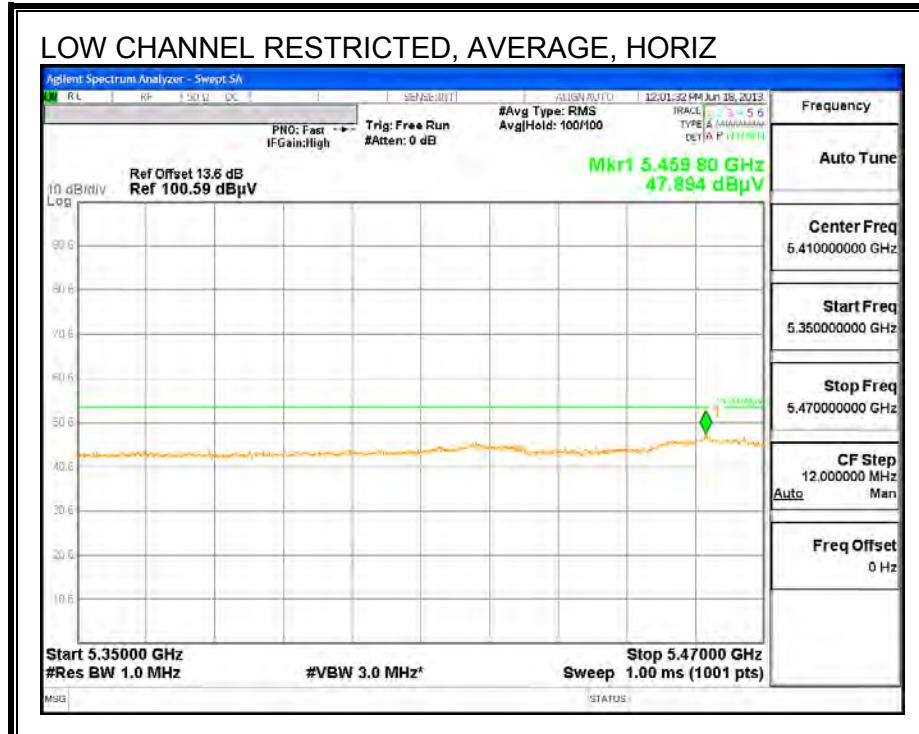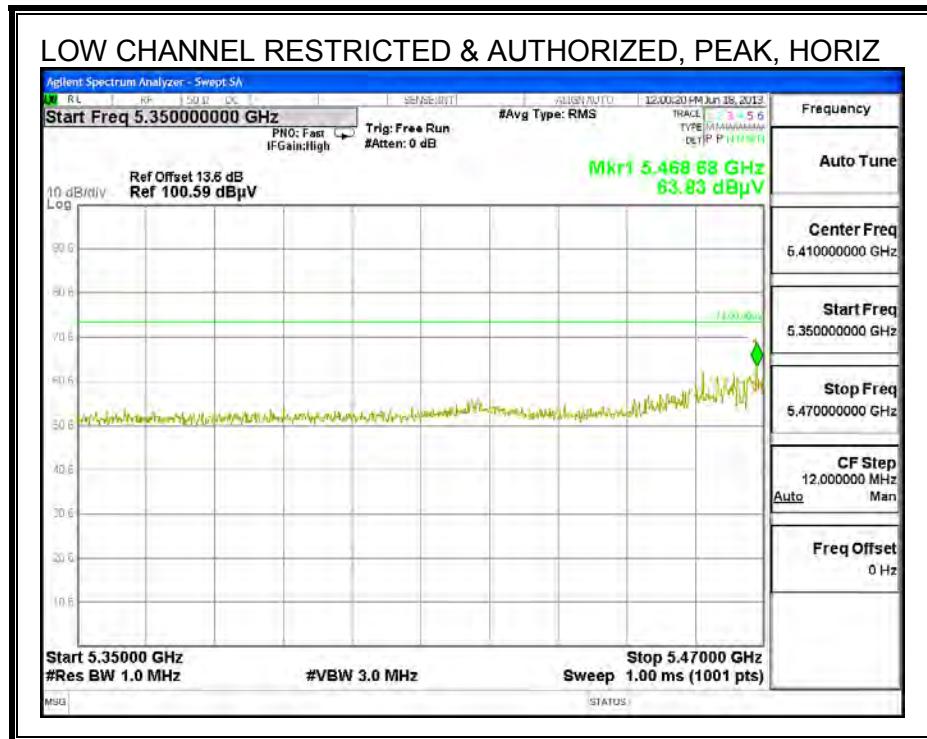


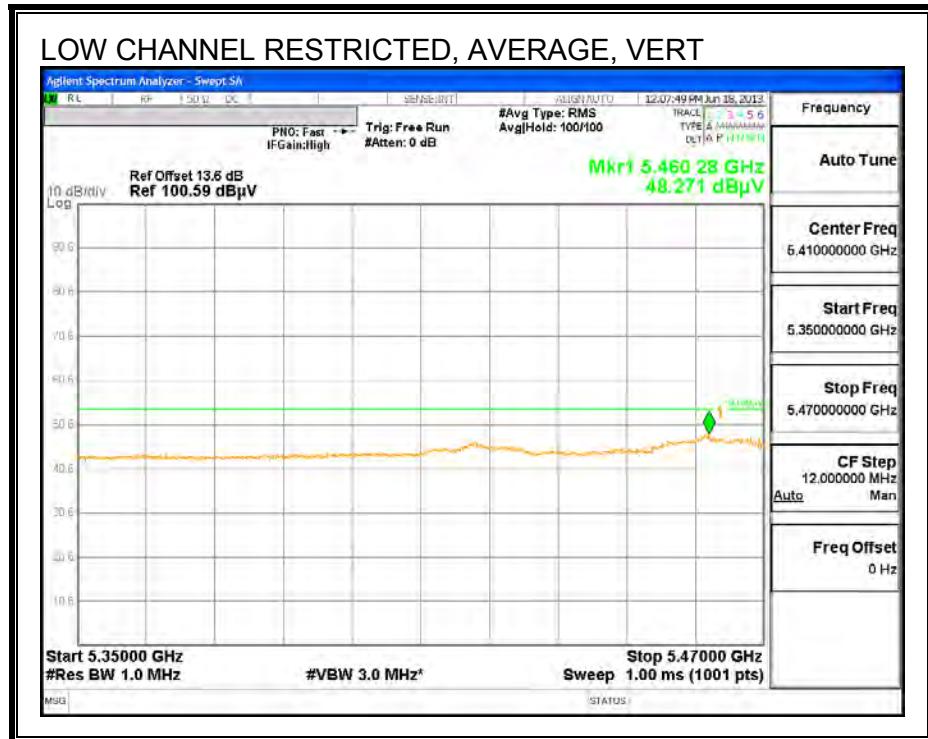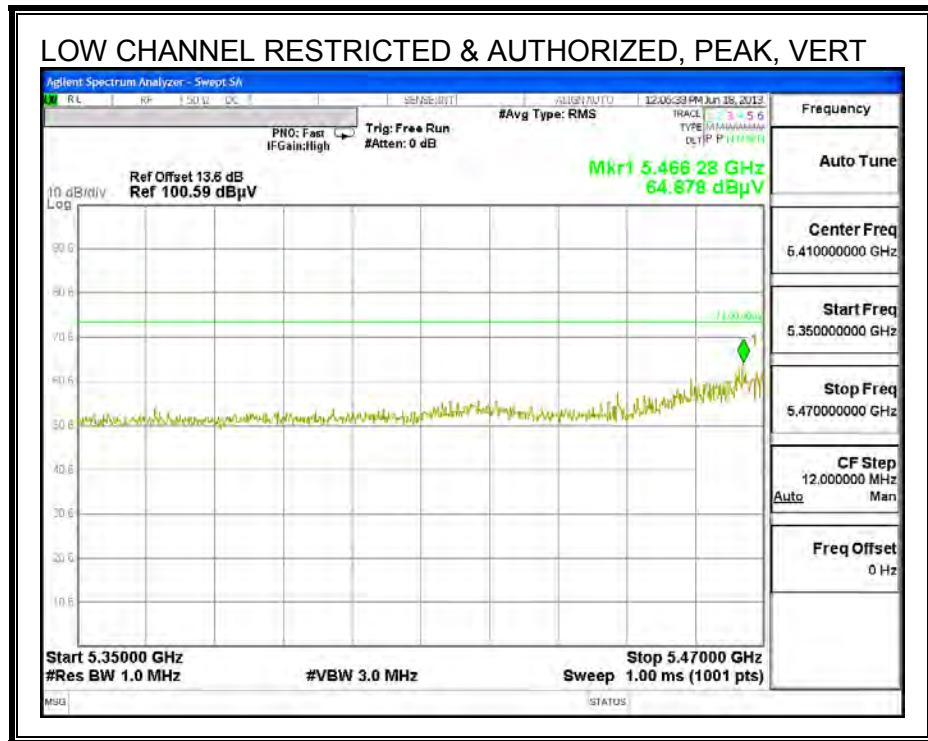


AUTHORIZED BANDEDGE (HIGH CHANNEL)

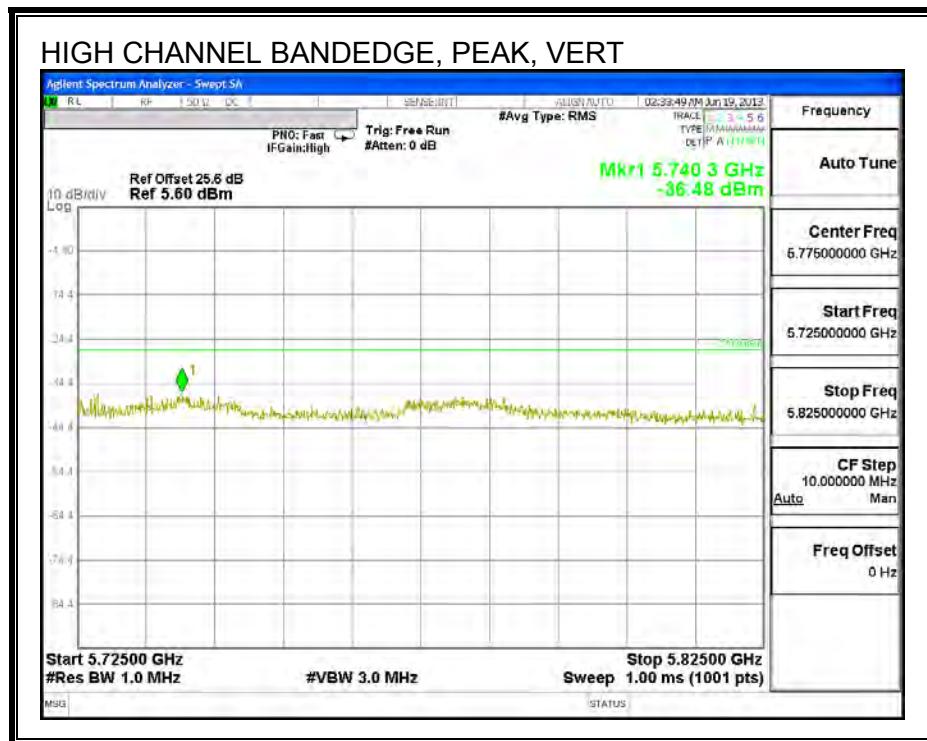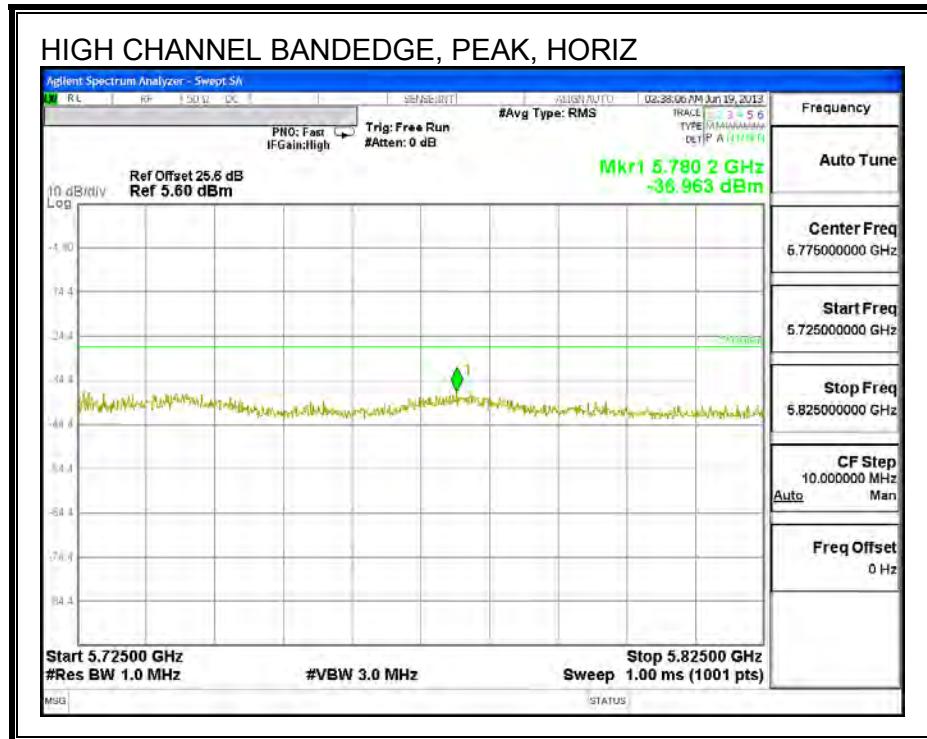


HARMONICS AND SPURIOUS EMISSIONS

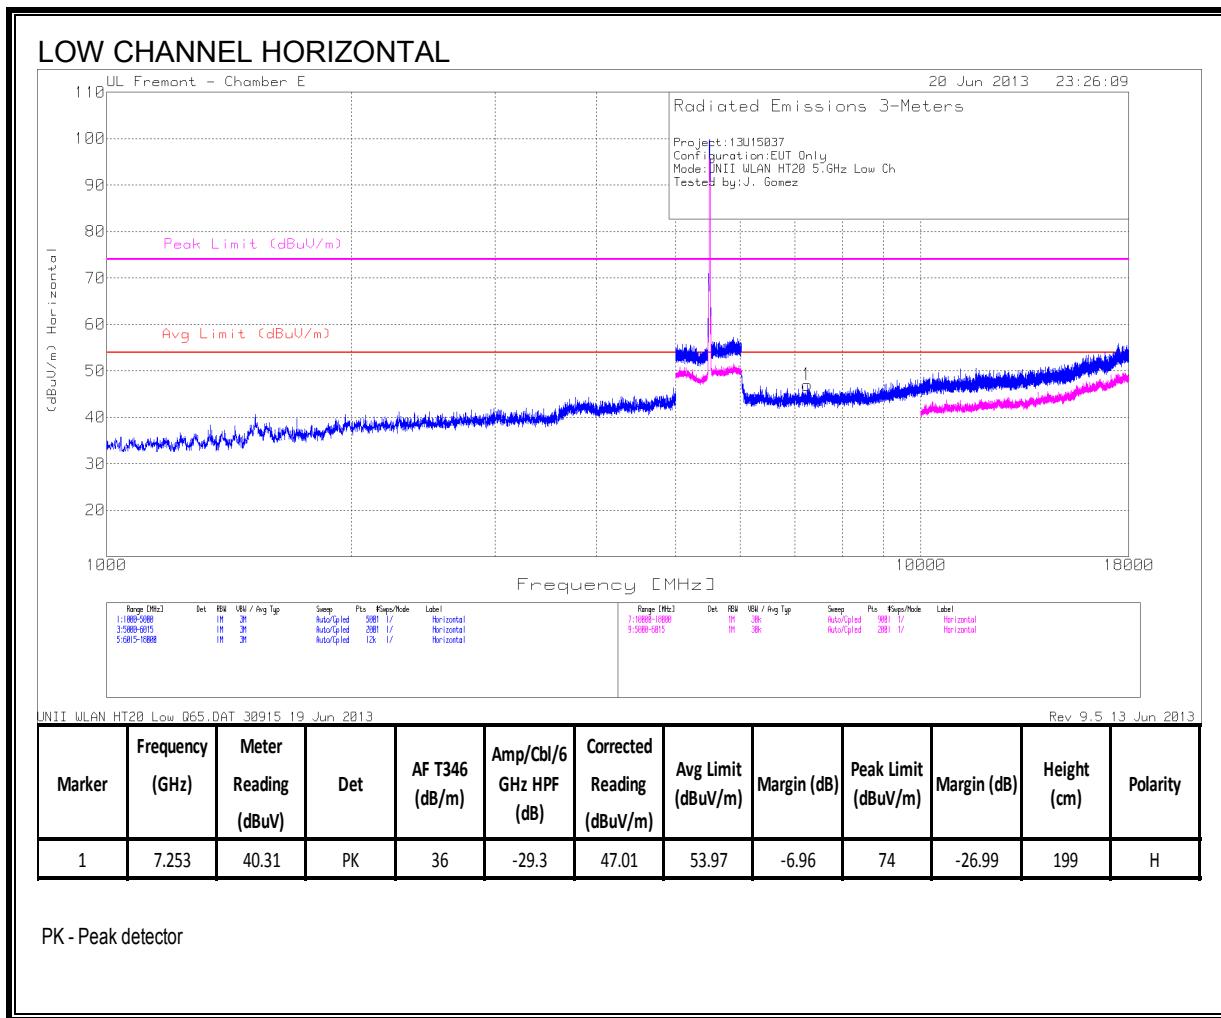

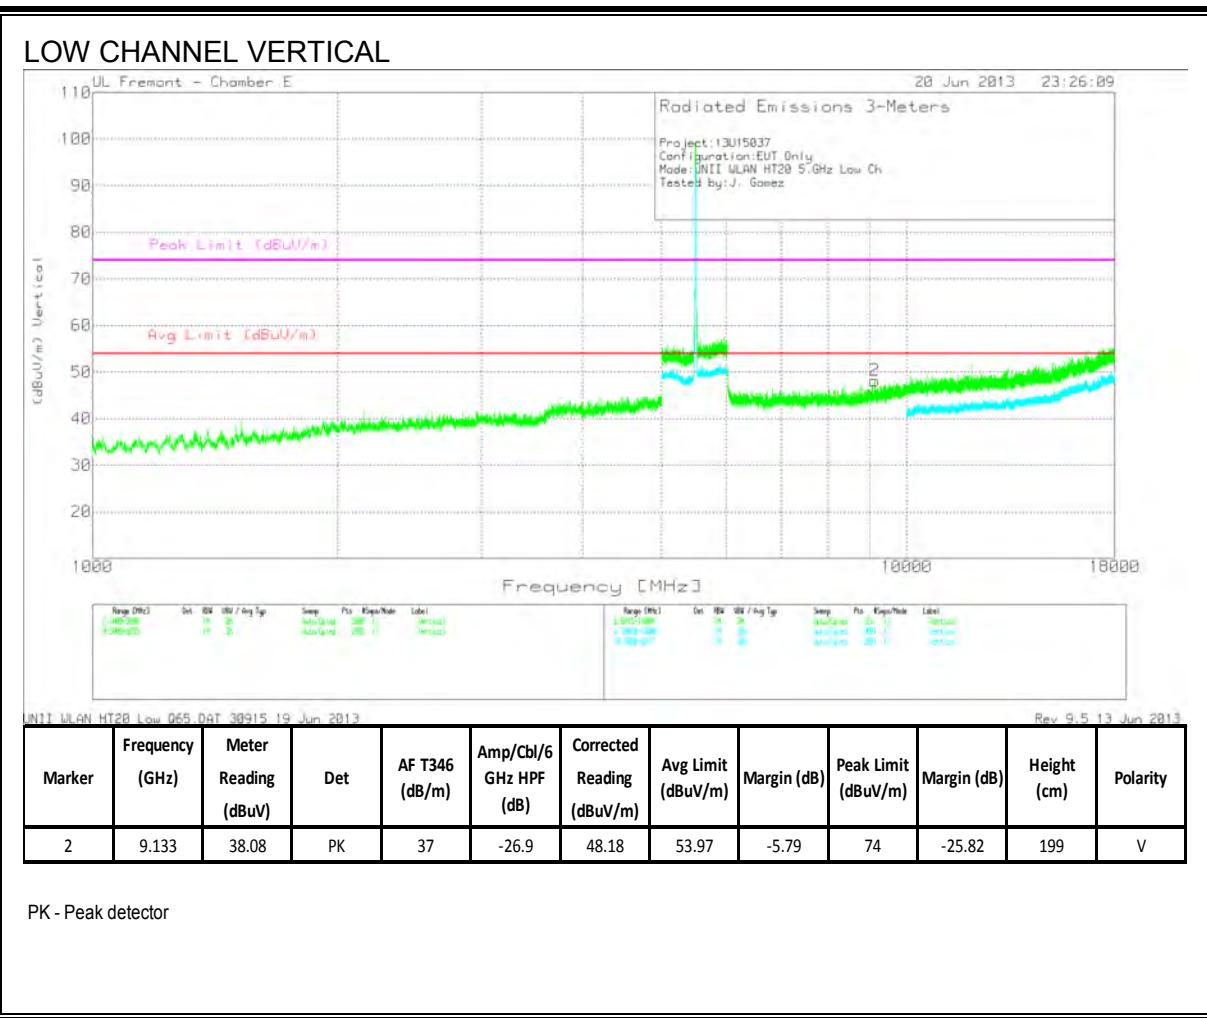

MID CHANNEL HORIZONTAL

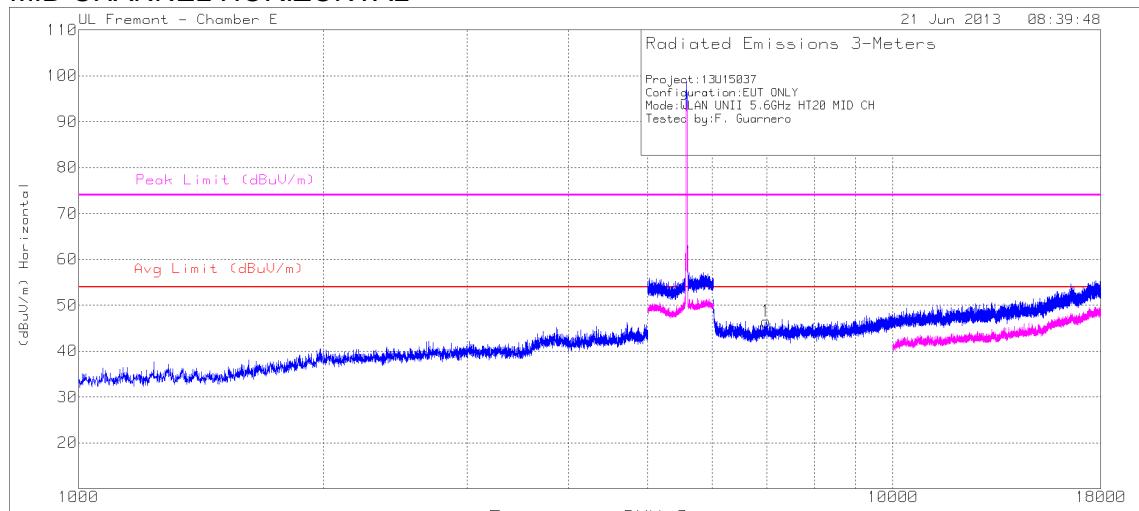


FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 19 Jun 2013 Rev 9.5 13 Jun 2013

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
1	6.994	39.46	PK	36	-29	46.46	53.97	-7.51	74	-27.54	199	H

PK - Peak detector

MID CHANNEL VERTICAL

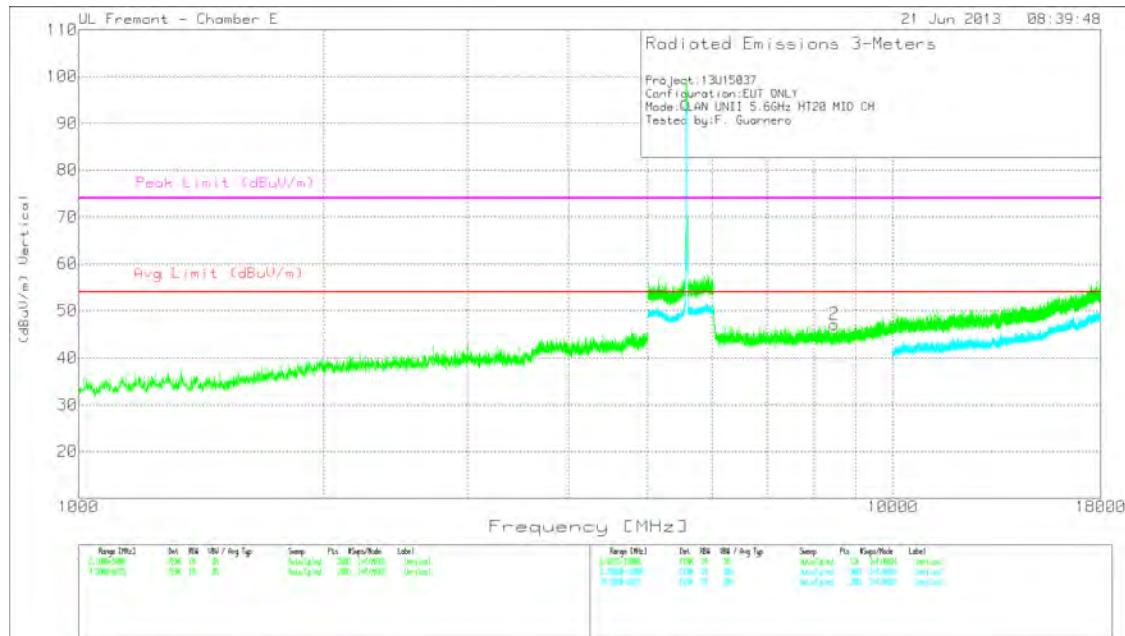


FCC Part 15C All 50Hz UNIT and DTS Spurious Emissions with Average Scan TST 30915 19 Jun 2013

Rev. 9.5 13 Jun 2013

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
2	8.472	38.64	PK	36.2	-27.8	47.04	53.97	-6.93	74	-26.96	199	V

PK - Peak detector


HIGH CHANNEL HORIZONTAL

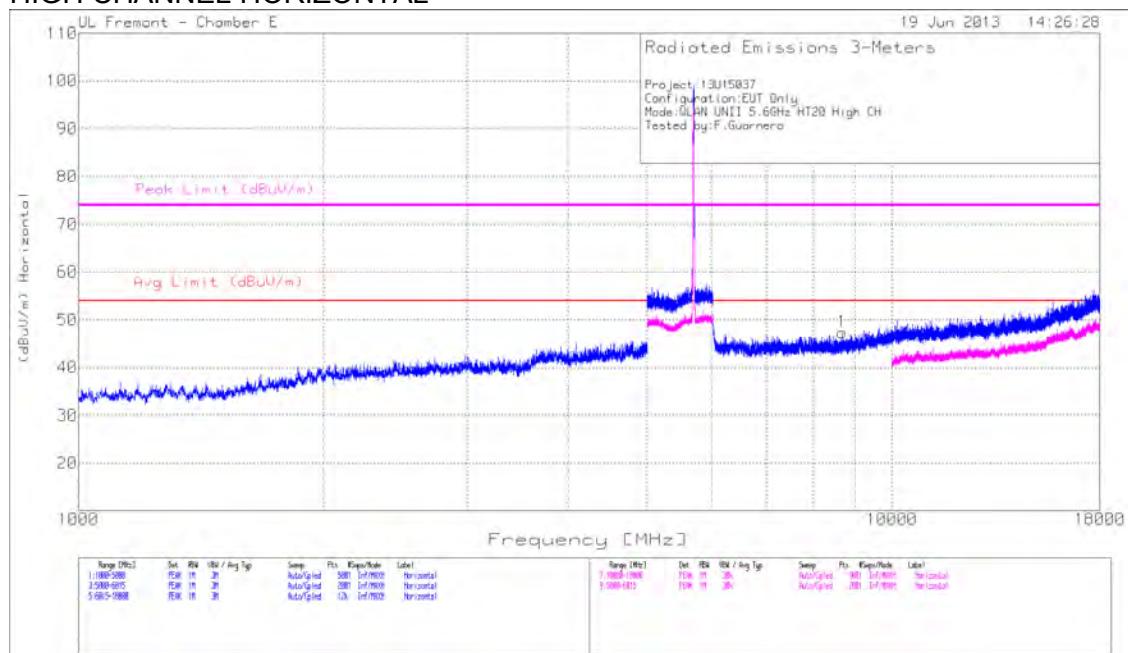

FCC Part15C All 5GHz UNIT and DTS Spurious Emissions with Average Scan TST 30915 19 Jun 2013 Rev 9.5 13 Jun 2013



Marker	Frequency	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)											
	Reading	(dBuV)										
1	8.683	38.26	PK	36.5	-27.4	47.36	53.97	-6.61	74	-26.64	199	H



PK - Peak detector

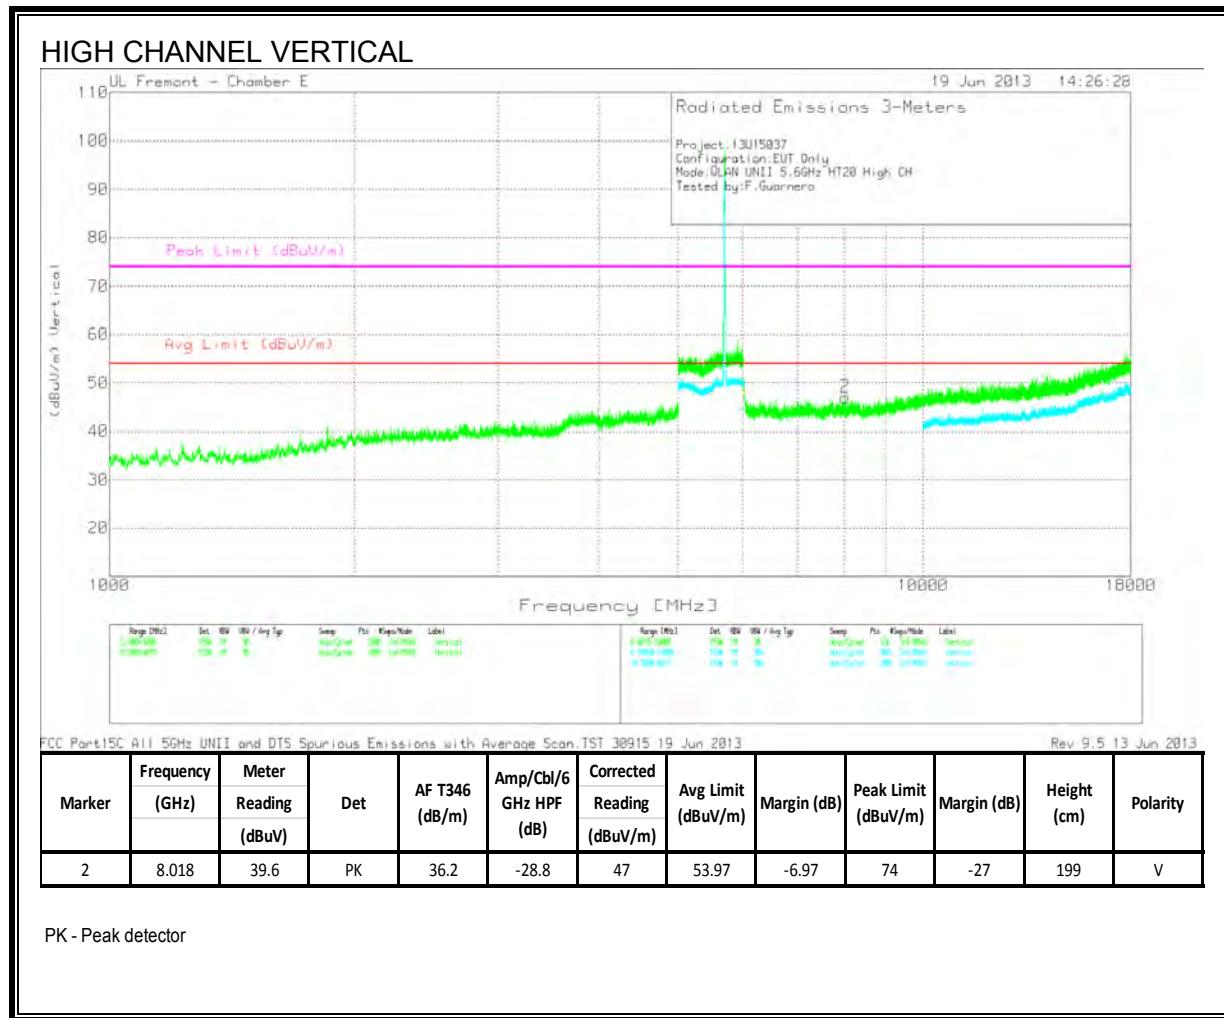



9.2.9. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND

RESTRICTED & AUTHORIZED BANEDGE (LOW CHANNEL)

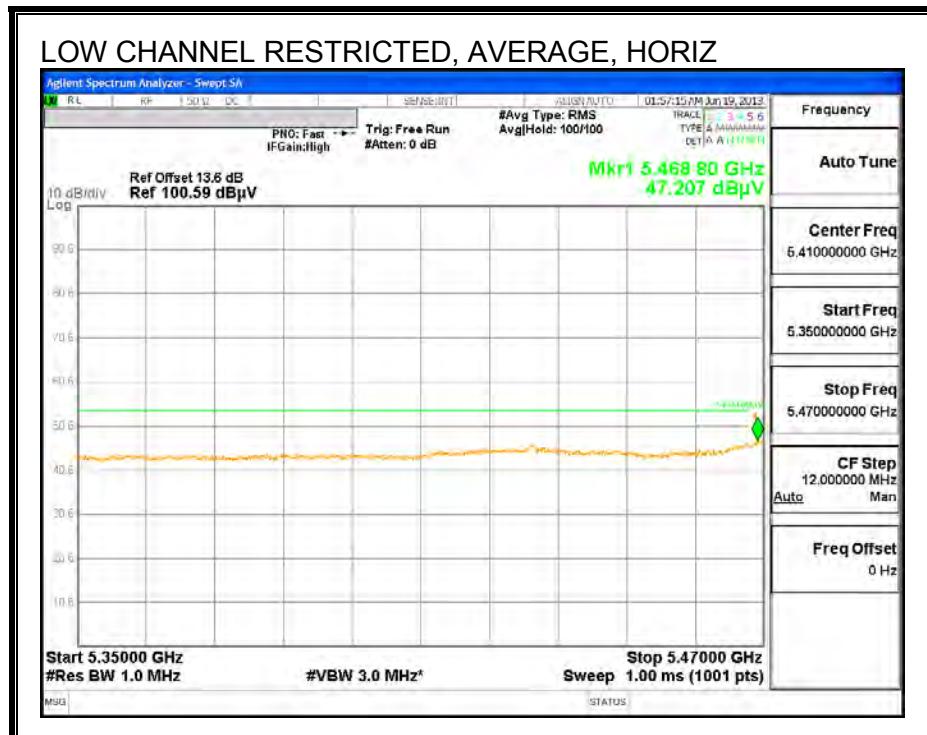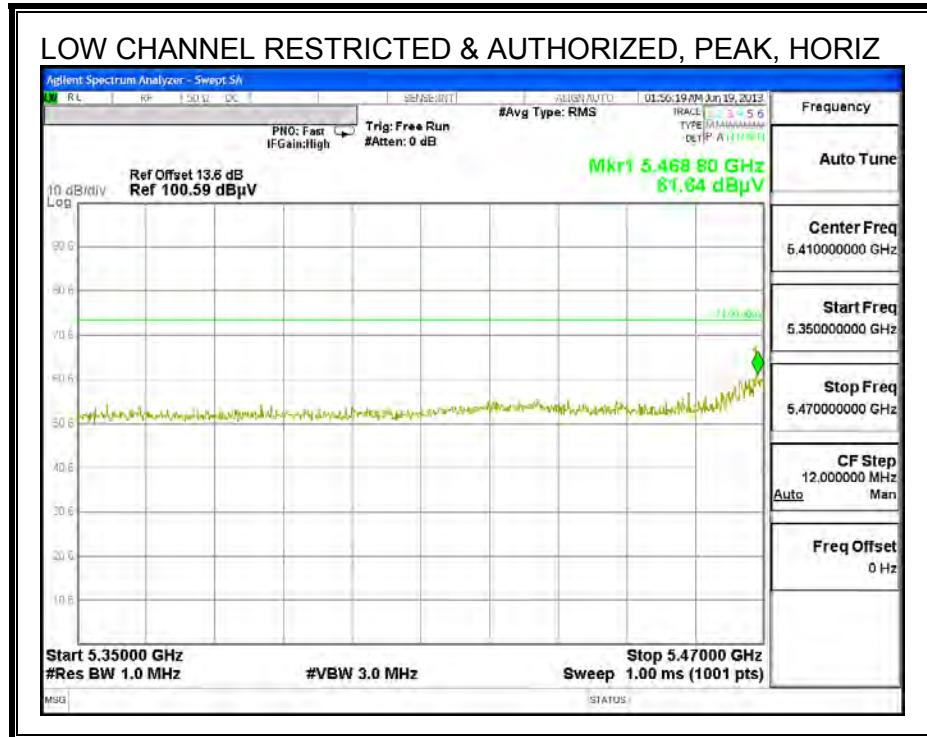


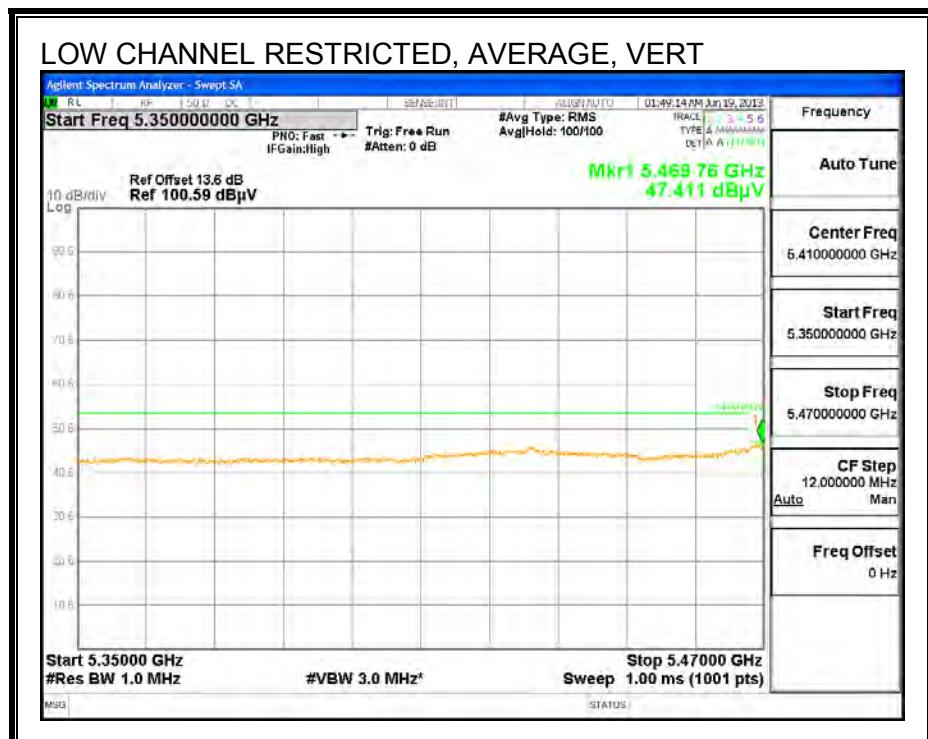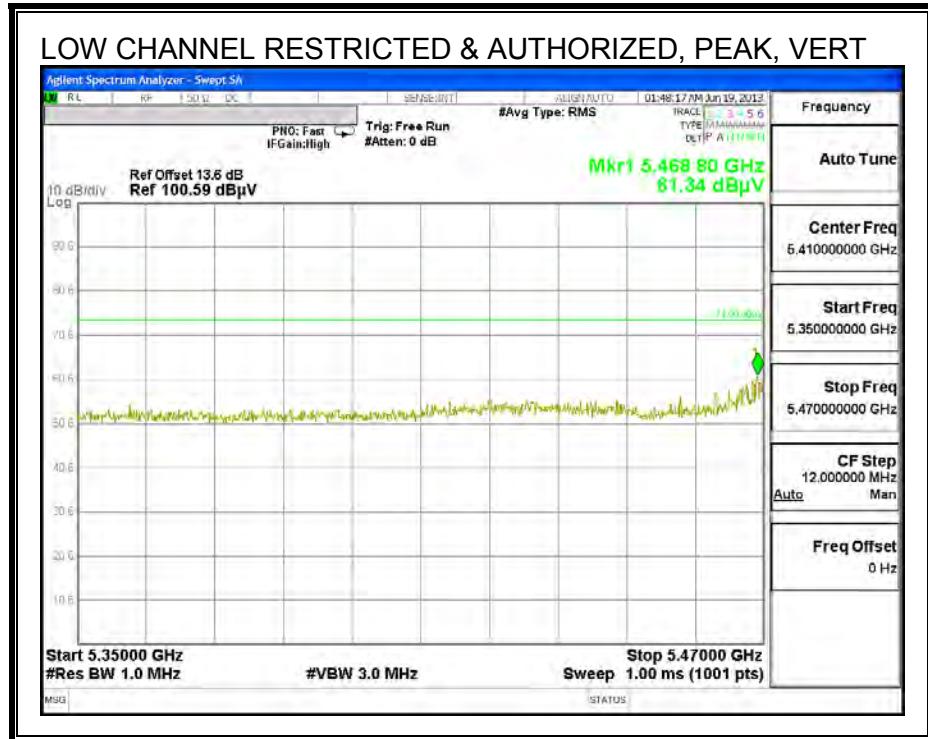


AUTHORIZED BANDEDGE (HIGH CHANNEL)

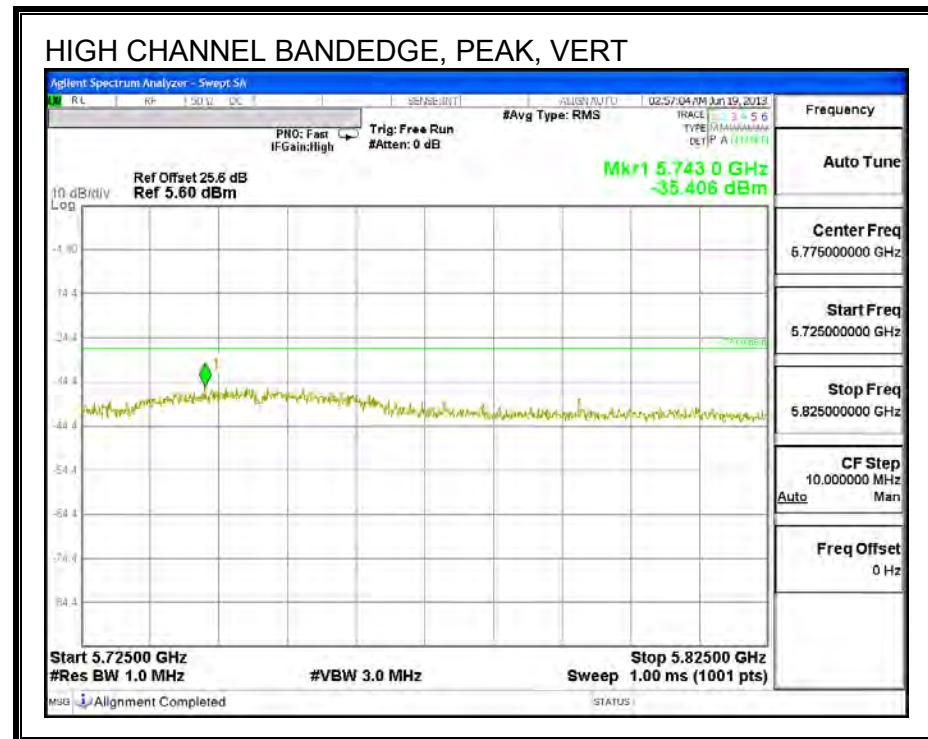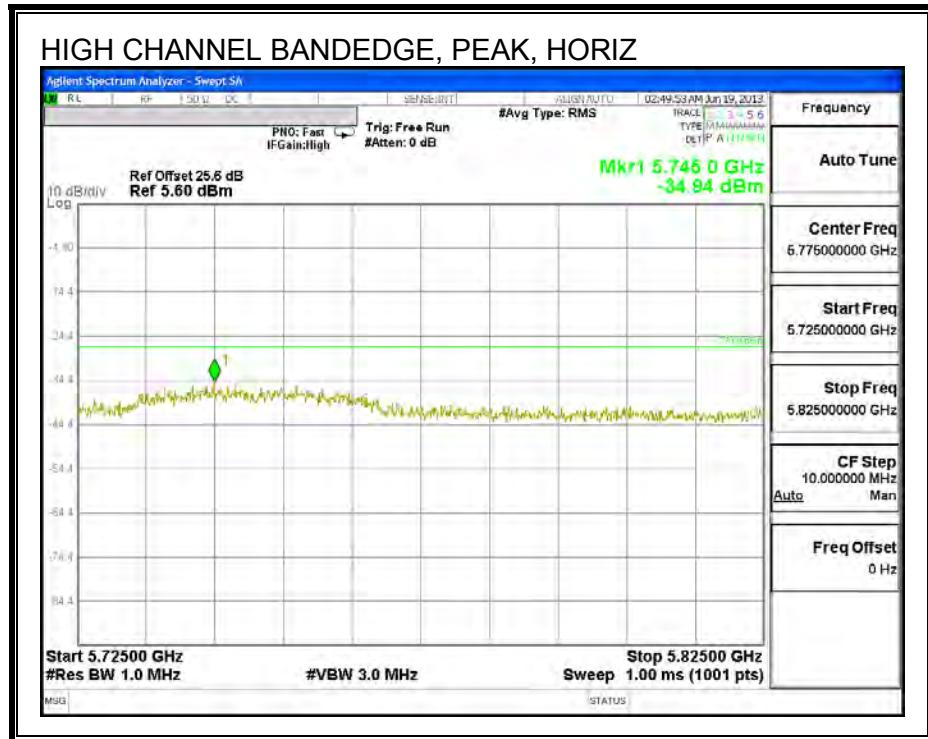

HARMONICS AND SPURIOUS EMISSIONS

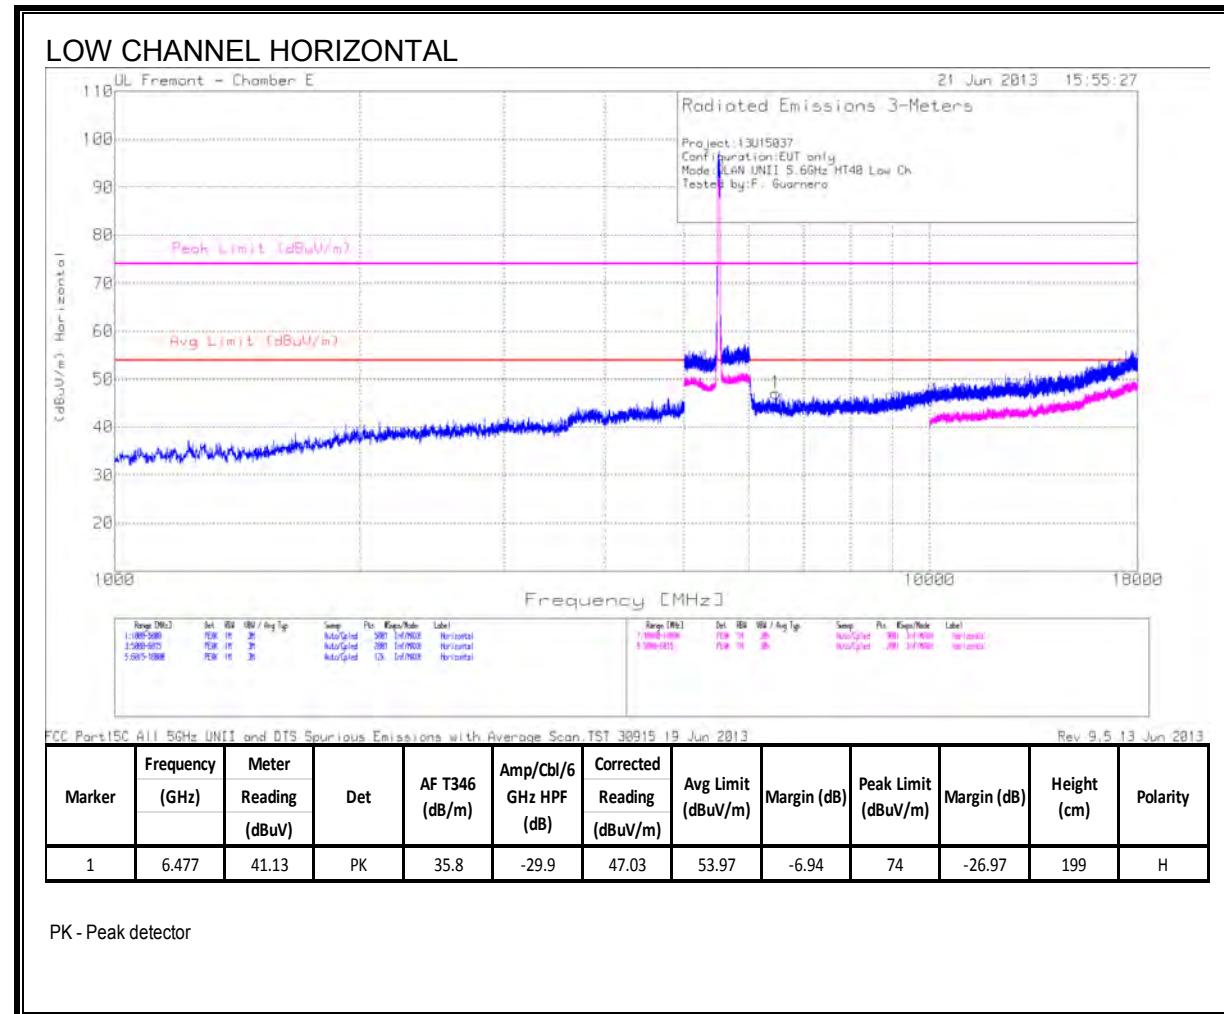

LOW CHANNEL VERTICAL

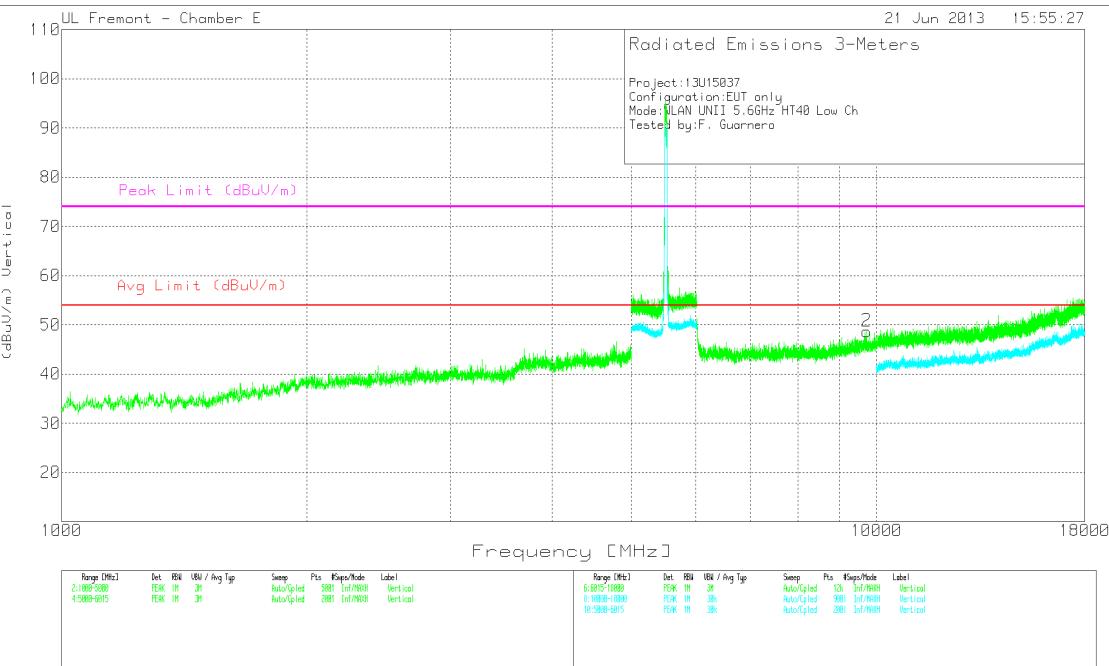


FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 19 Jun 2013

Rev. 9.5 13 Jun 2013

Marker	Frequency	Meter	Det	AF T346 (dBuV)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)	Reading (dBuV)										
2	9.729	36.75	PK	37.6	-25.7	48.65	53.97	-5.32	74	-25.35	199	V

PK - Peak detector

MID CHANNEL HORIZONTAL

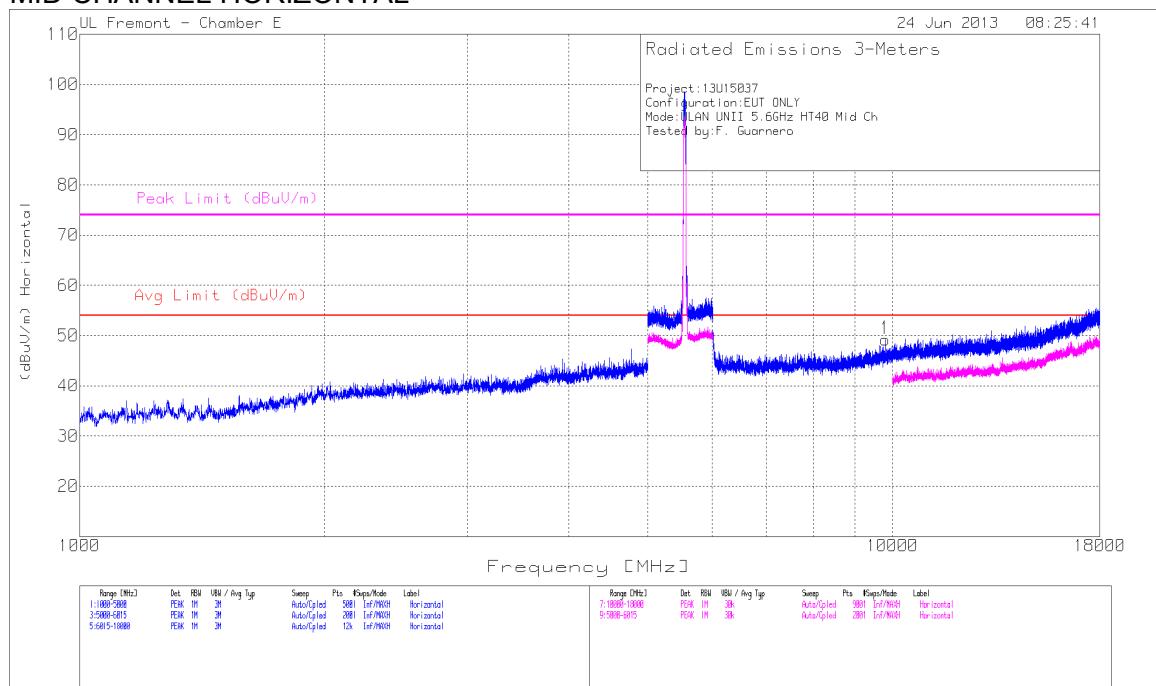


FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan. TST 30915 19 Jun 2013

Rev 9.5 13 Jun 2013

Marker	Frequency	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)											
	Reading (dBuV)											
1	9.801	37.54	PK	37.7	-26	49.24	53.97	-4.73	74	-24.76	199	H

PK - Peak detector

MID CHANNEL VERTICAL

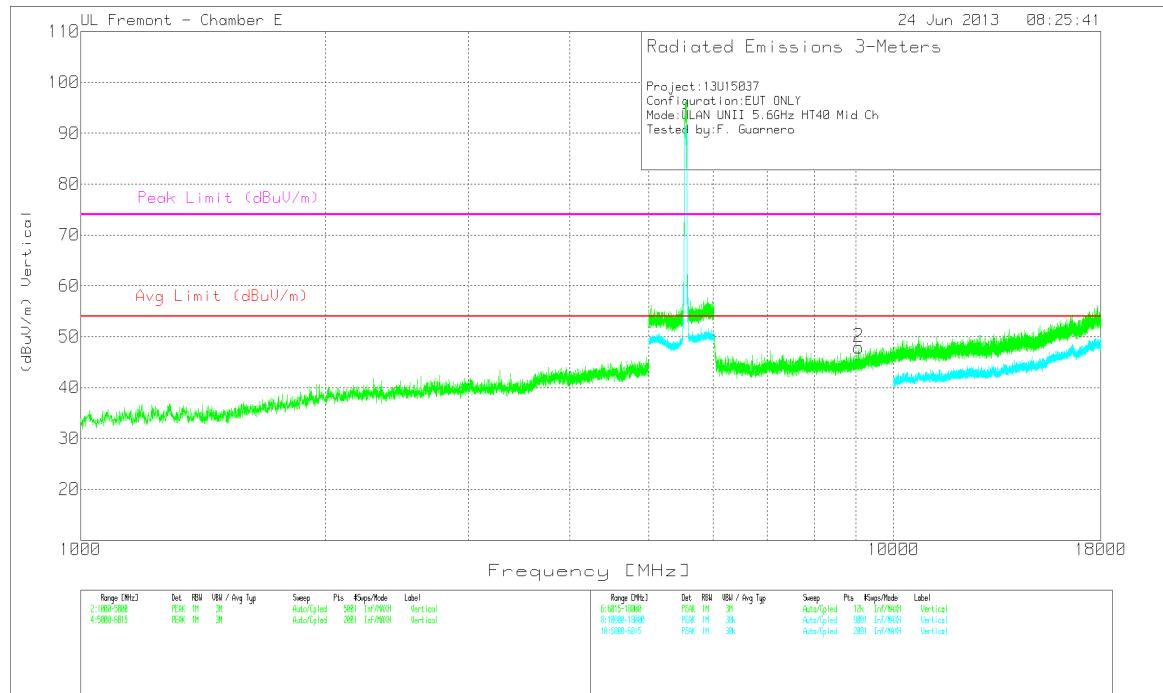


FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan TST 30915 19 Jun 2013

Rev. 9.5 13 Jun 2013

Marker	Frequency	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
	(GHz)	Reading										
	(dBuV)	Reading										
2	9.065	37.92	PK	36.9	-26.9	47.92	53.97	-6.05	74	-26.08	199	V

PK - Peak detector

HIGH CHANNEL HORIZONTAL

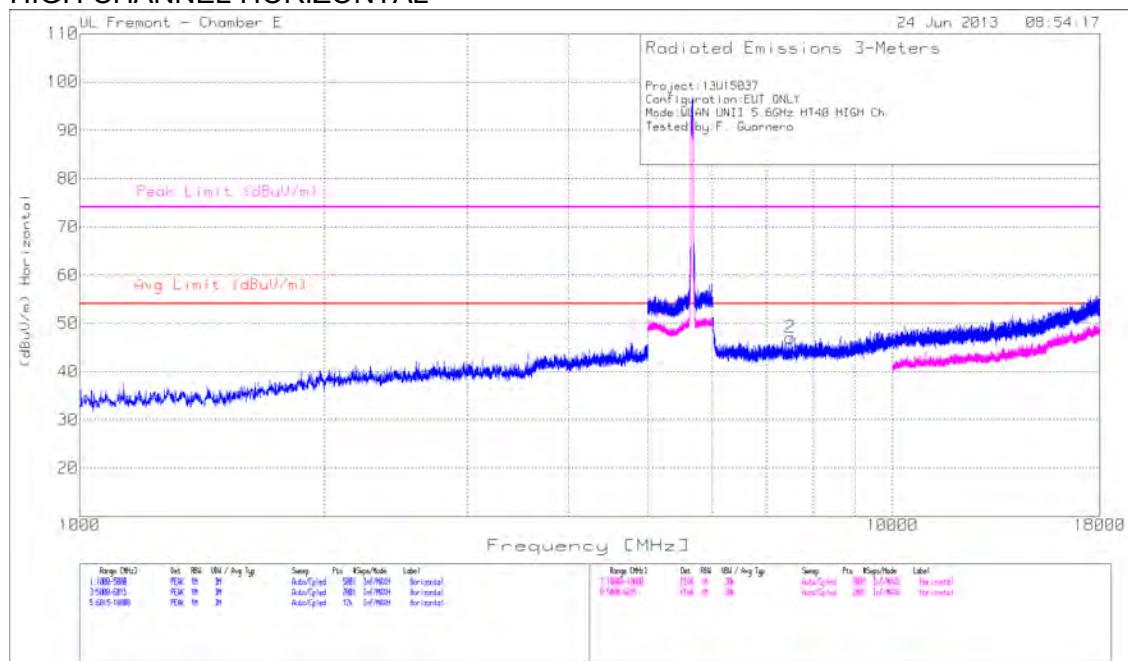


FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan TST 38915 19 Jun 2013

Rev. 9.5.13 Jun 2013


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
2	7.491	40.28	PK	36.1	-29.4	46.98	53.97	-6.99	74	-27.02	199	H

PK - Peak detector

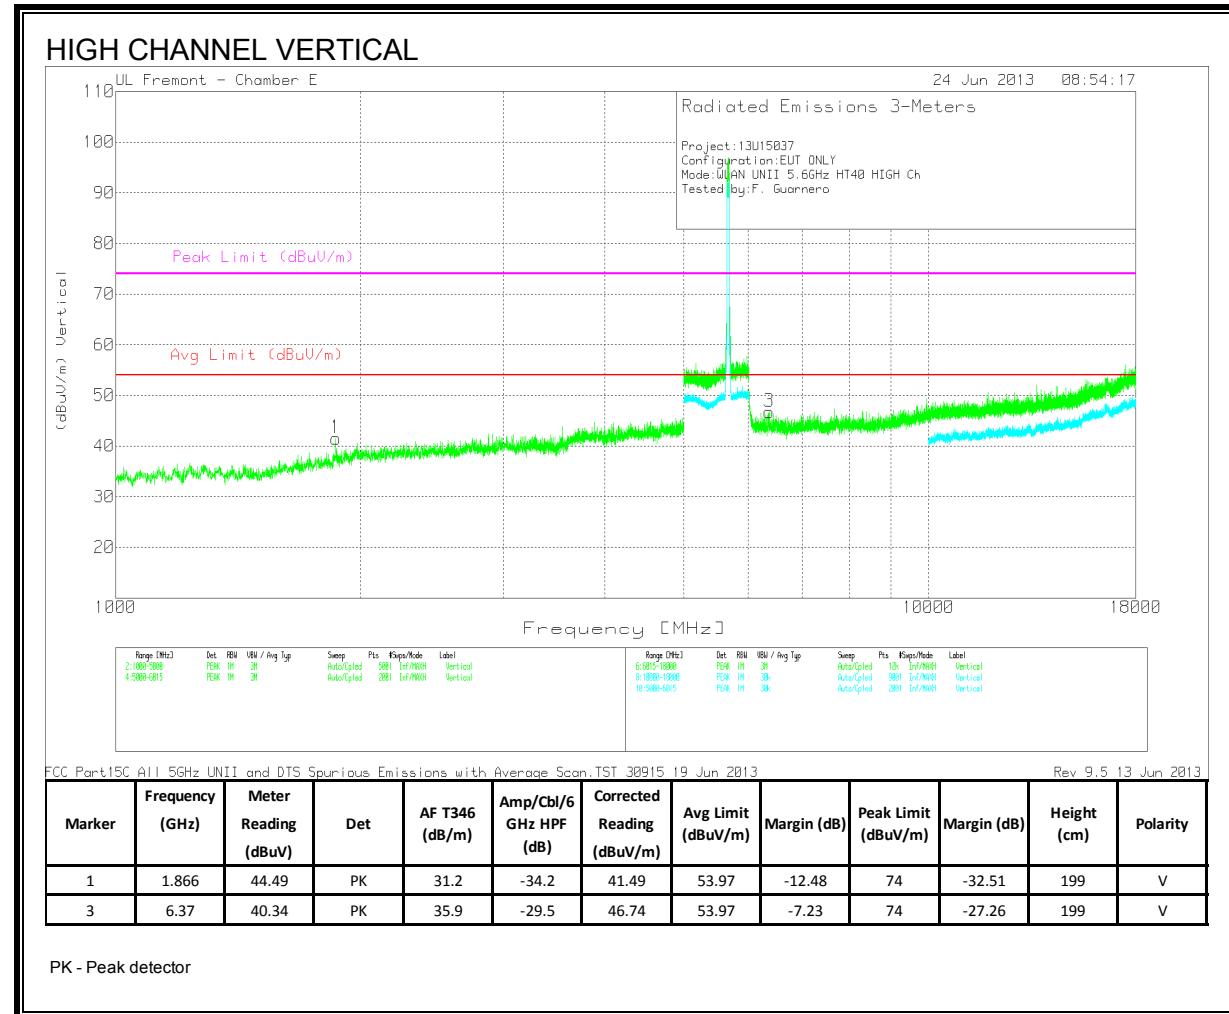


9.2.10. 2.4GHz and 5GHz Band Co-Location


BLUETOOTH ON

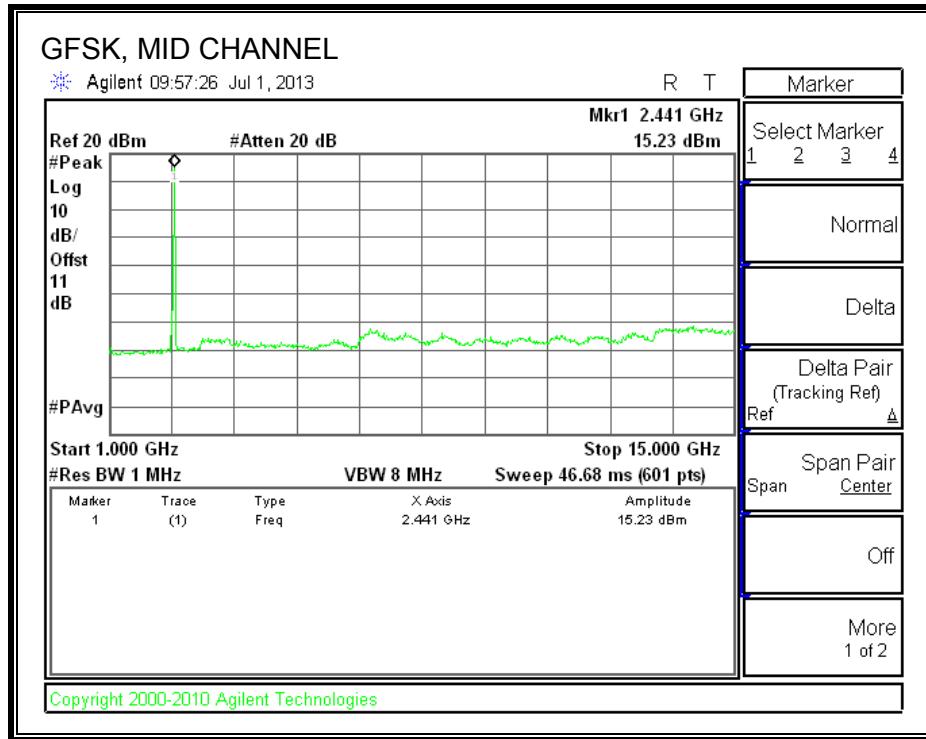


BLUETOOTH AND WiFi ON

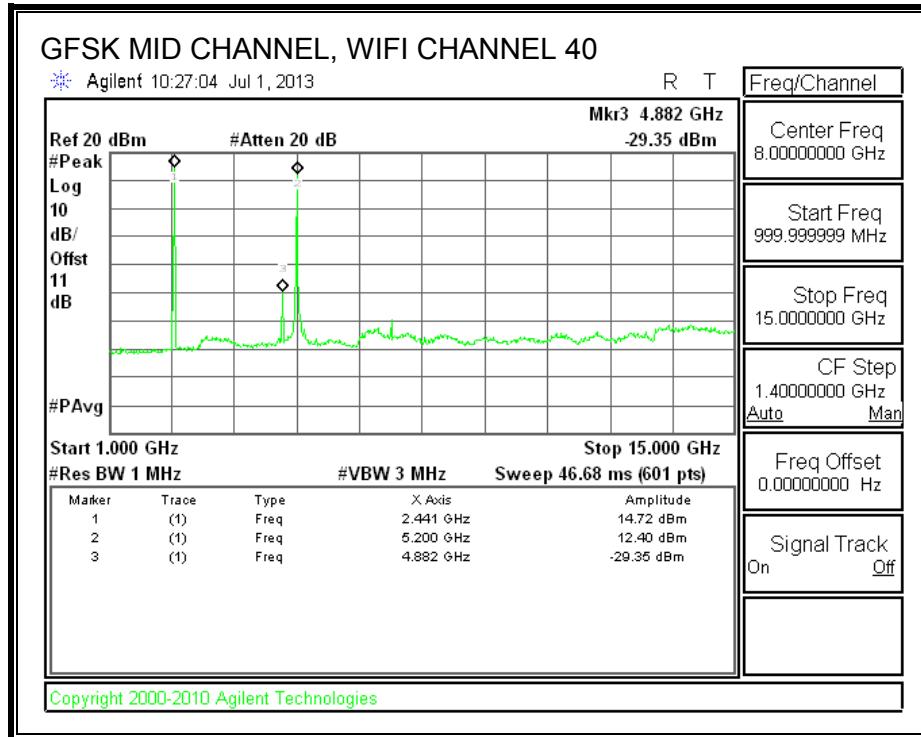


BLUETOOTH OFF WiFi ON

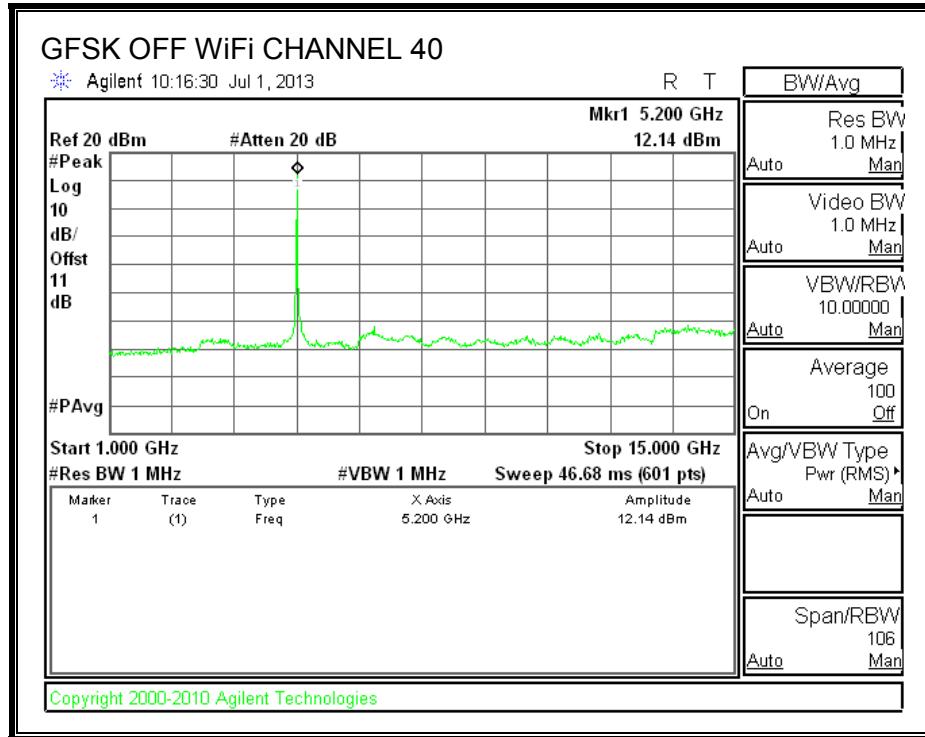

HARMONICS AND SPURIOUS EMISSIONS

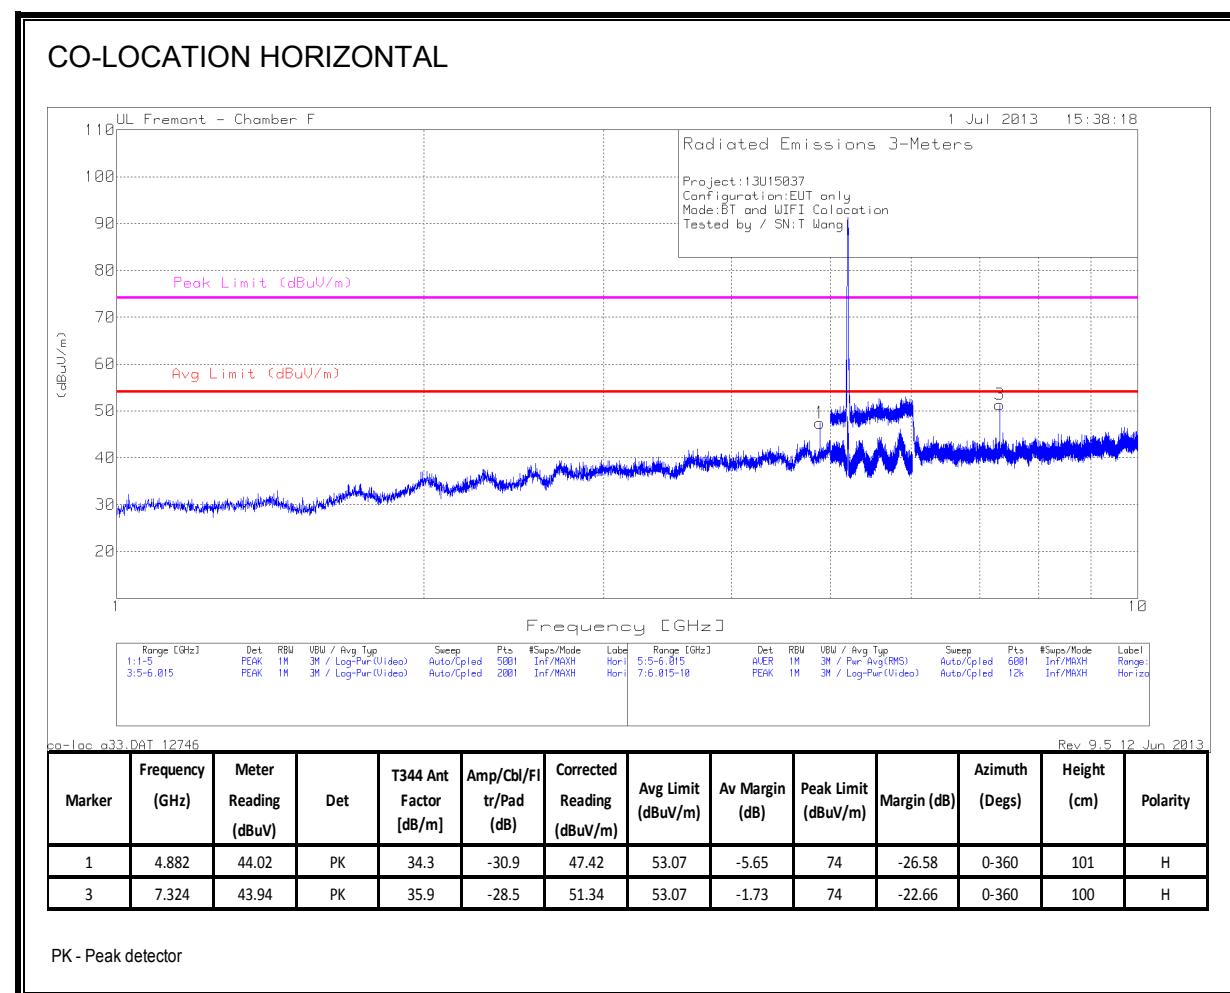

CO-LOCATION VERTICAL

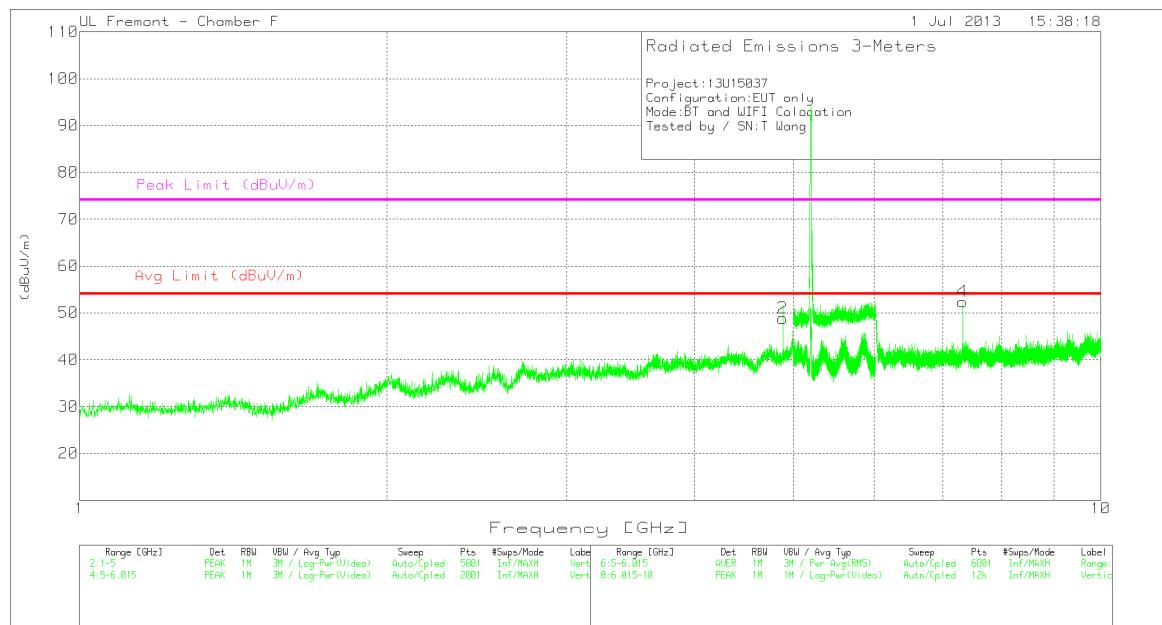

co-loc_a33.DAT 12746


Rev 9.5 12 Jun 2013

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T344 Ant Factor [dB/m]	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Av Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	4.882	45.44	PK	34.3	-30.9	48.84	53.07	-4.23	74	-25.16	0-360	100	V
4	7.323	45.01	PK	35.9	-28.5	52.41	53.07	-0.66	74	-21.59	0-360	100	V


PK - Peak detector

9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

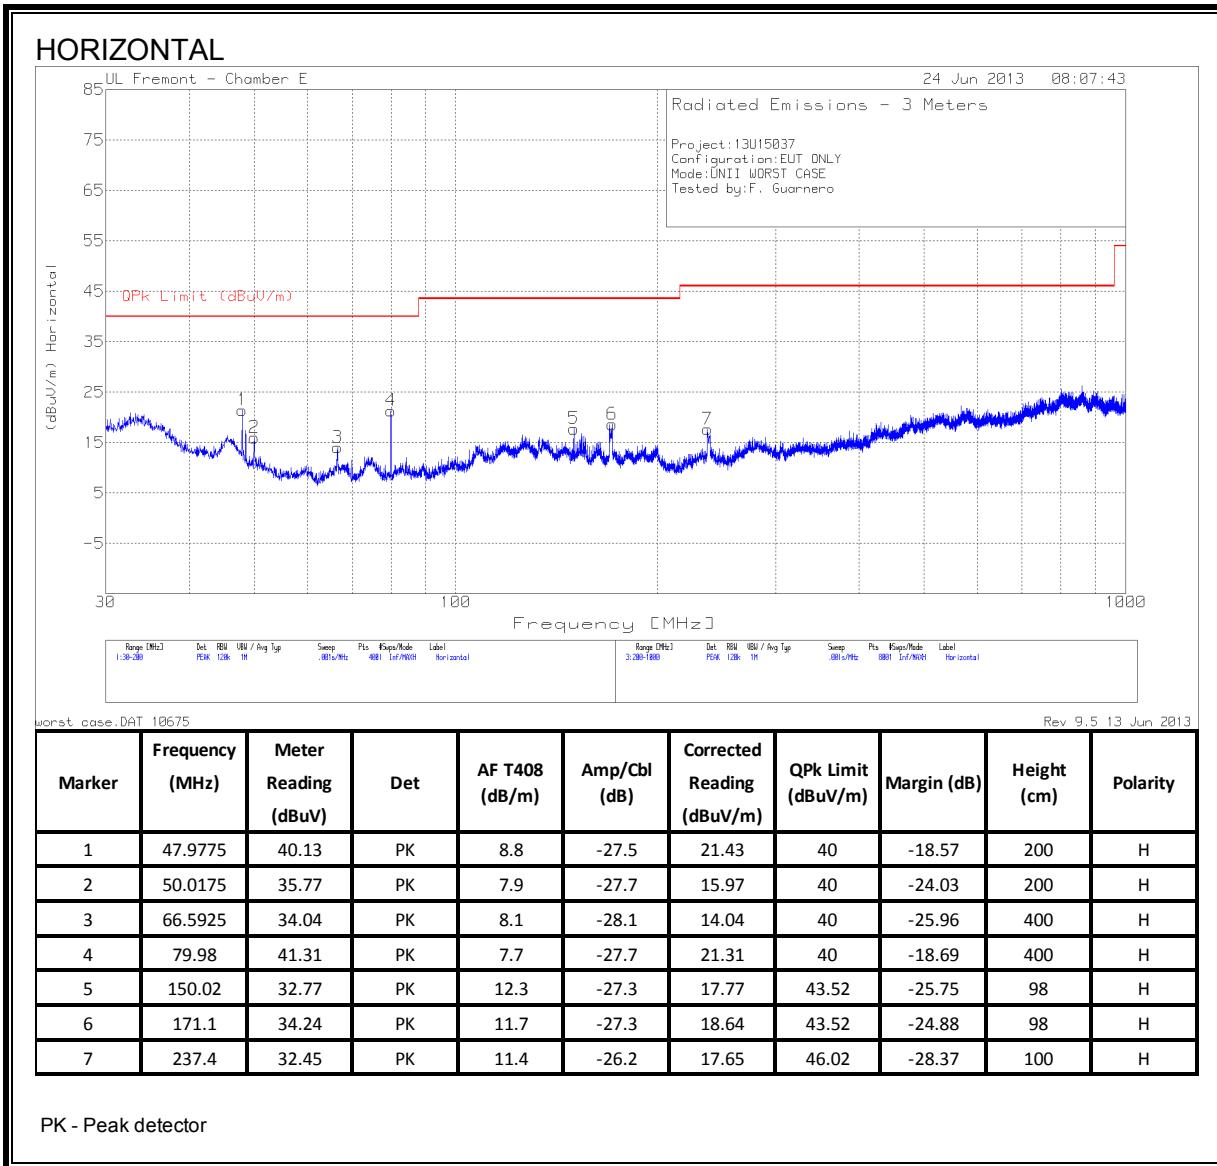

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

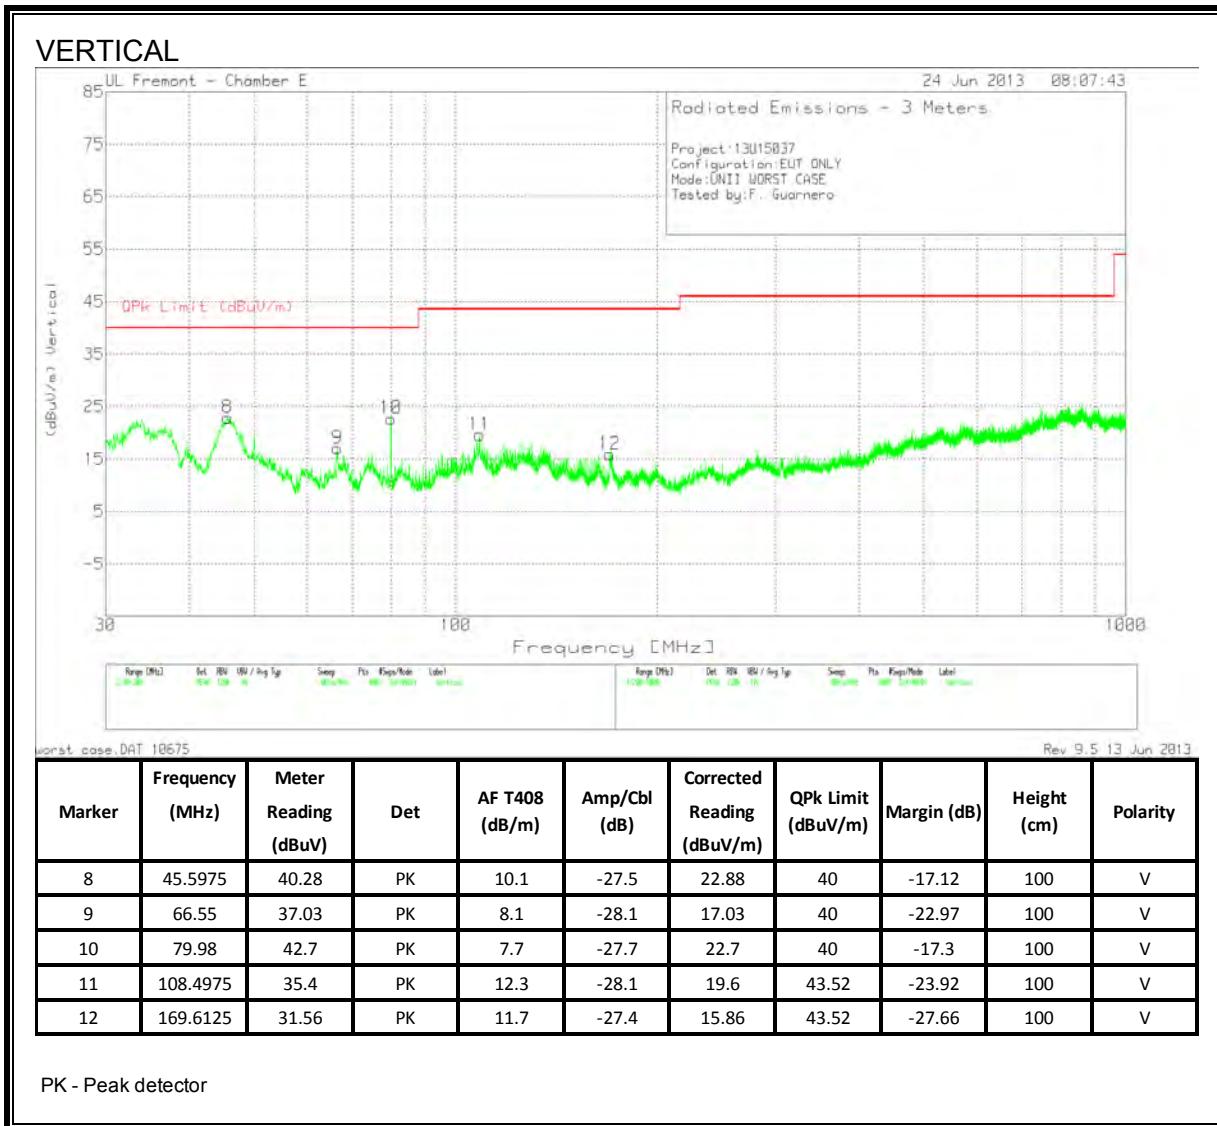

9.4. RECEIVER ABOVE 1 GHz

Note: No emissions were detected above the system noise floor.

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin	CISPR 11/22 Class B Average	Margin
0.159	54.38	QP	0.1	0	54.48	65.52	-11.04	-	-
0.159	48.7	Av	0.1	0	48.8	-	-	55.5	-6.7
0.8295	48.8	PK	0.1	0	48.9	56	-7.1	-	-
0.8295	30.76	Av	0.1	0	30.86	-	-	46	-15.14
7.278	39.71	PK	0.1	0.1	39.91	60	-20.09	-	-
7.278	25.72	Av	0.1	0.1	25.92	-	-	50	-24.08
16.854	45.42	PK	0.2	0.2	45.82	60	-14.18	-	-
16.854	28.85	Av	0.2	0.2	29.25	-	-	50	-20.75

Line-L2 .15 - 30MHz


Test Frequency	Meter Reading	Detector	T24 IL L2.TXT (dB)	LC Cables 2&3.TXT (dB)	dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin	CISPR 11/22 Class B Average	Margin
0.1545	54.75	PK	0.1	0	54.85	65.8	-10.95	-	-
0.1545	40.25	Av	0.1	0	40.35	-	-	55.8	-15.45
0.78	42.3	PK	0.1	0	42.4	56	-13.6	-	-
0.78	24.89	Av	0.1	0	24.99	-	-	46	-21.01
2.4585	35.55	PK	0.1	0.1	35.75	56	-20.25	-	-
2.4585	22.07	Av	0.1	0.1	22.27	-	-	46	-23.73
17.5425	42	PK	0.2	0.2	42.4	60	-17.6	-	-
17.5425	29.72	Av	0.2	0.2	30.12	-	-	50	-19.88

PK - Peak detector


QP - Quasi-Peak detector

Av - Average detector

LINE 1 RESULTS

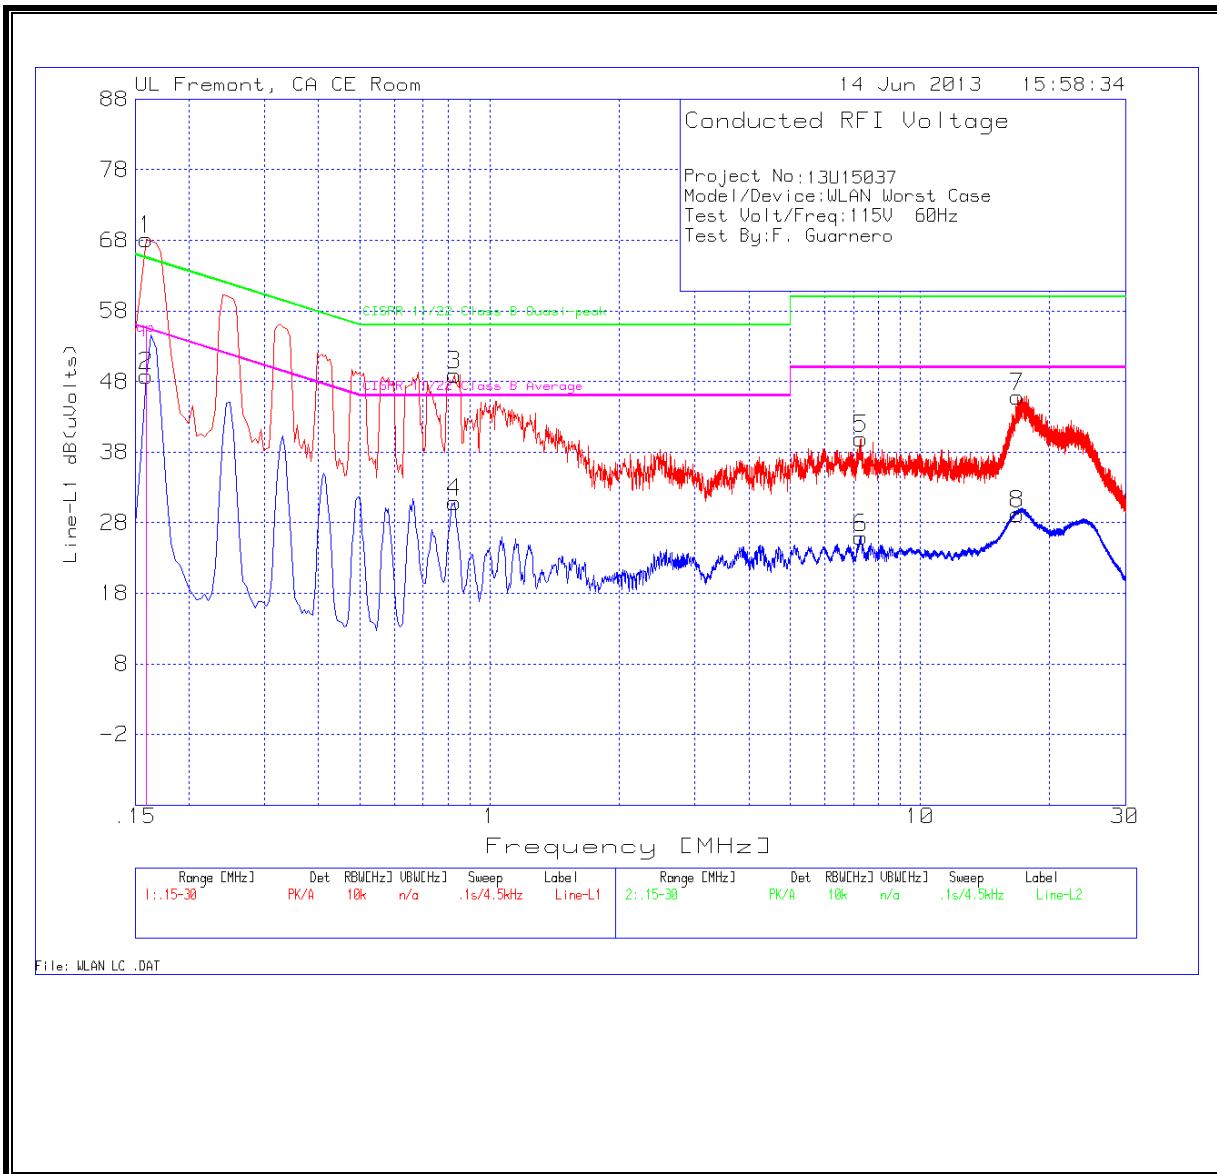

LINE 2 RESULTS

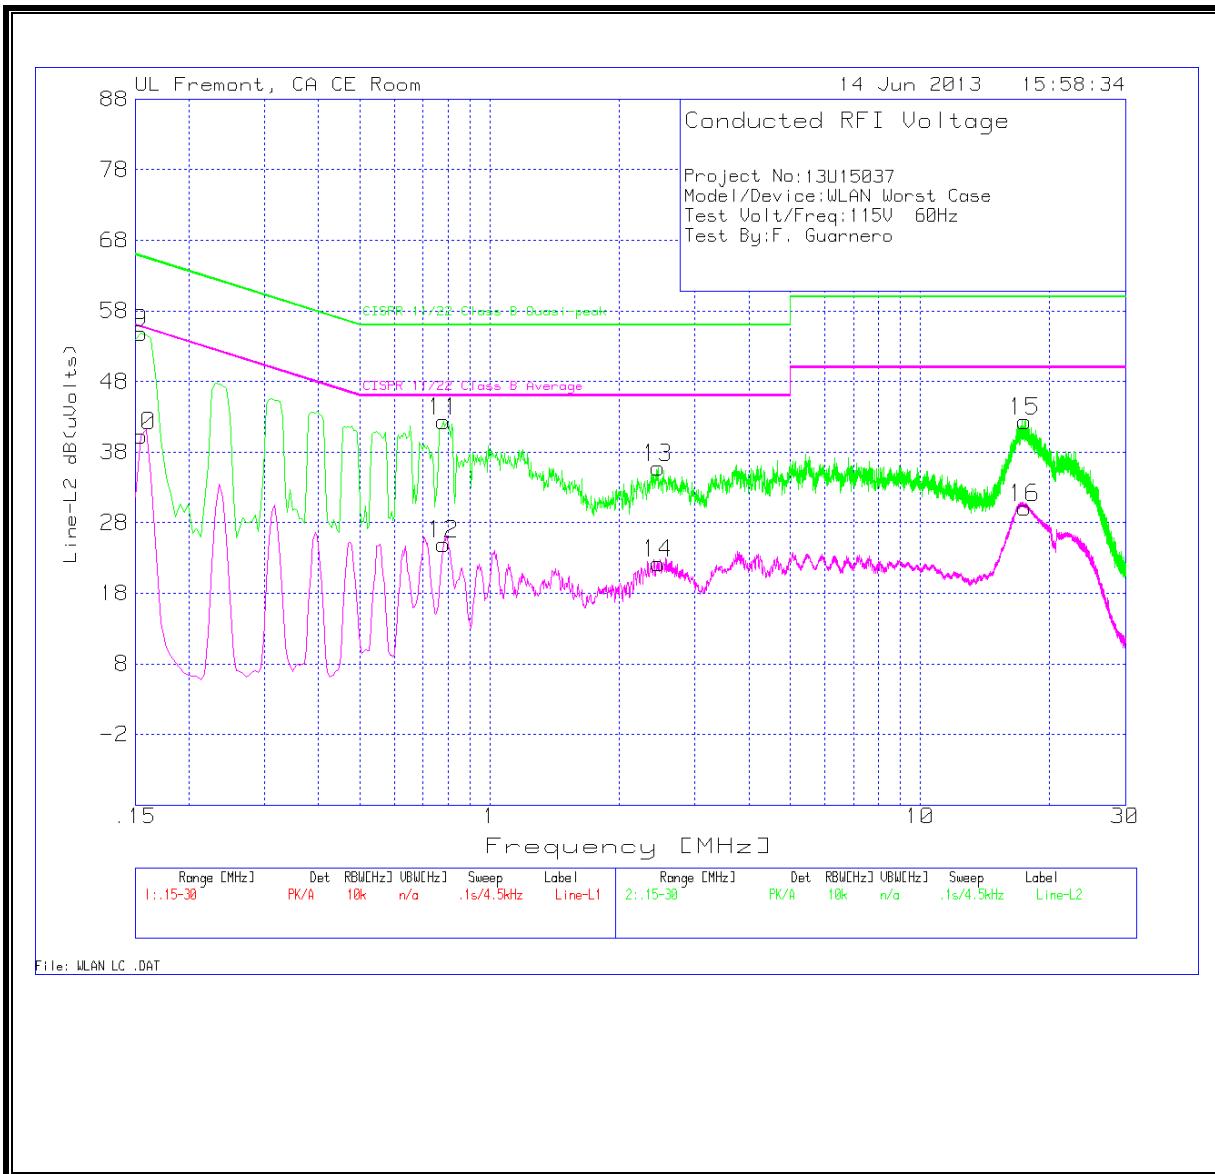

11. DYNAMIC FREQUENCY SELECTION

11.1. OVERVIEW

11.1.1. LIMITS

FCC

§15.407 (h) and FCC 06-96 APPENDIX "COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVCIES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION".

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna	
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
<p>The instant that the <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> begins is as follows:</p> <p>For the Short pulse radar Test Signals this instant is the end of the <i>Burst</i>.</p> <p>For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.</p> <p>For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.</p> <p>The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p>	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 6 – Long Pulse Radar Test Signal


Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	.333	70%	30

11.1.2. TEST AND MEASUREMENT SYSTEM

RADIATED METHOD SYSTEM BLOCK DIAGRAM

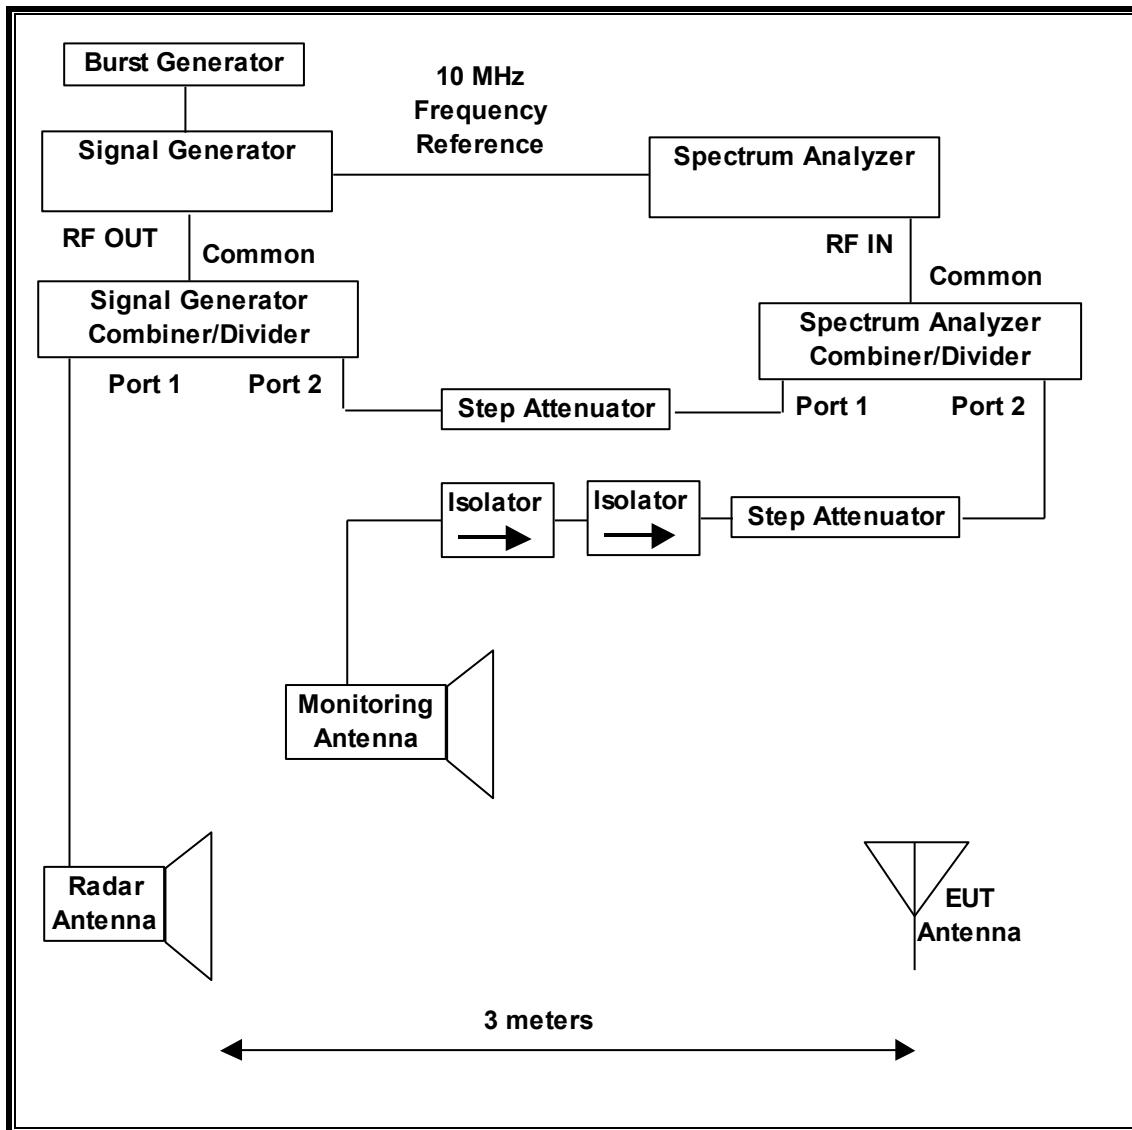

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset Number	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/18/13
Vector Signal Generator, 20GHz	Agilent / HP	E8267C	C01066	11/20/13

11.1.3. SETUP OF EUT (CLIENT MODE)

RADIATED METHOD EUT TEST SETUP

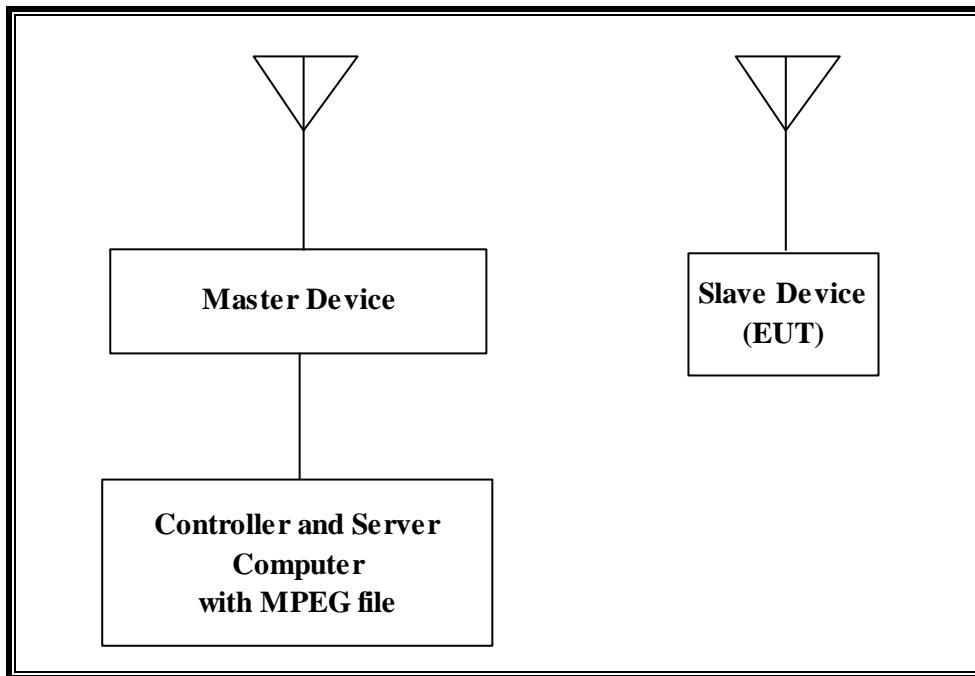


SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point (Master Device)	Cisco	AIR-AP1252AG-A-K9	FTX130390D9	LDK102061
AC Adapter (AP)	Delta Electronics	EADP-45BB B	DTH1049902N	DoC
Notebook PC (Controller/Server)	Apple	MacBook Pro A1150	AOU257941	DoC
AC Adapter (Controller/Server PC)	Delta Electronics	A1330	MV952157KAGKA	DoC

11.1.4. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)

RADIATED METHOD EUT TEST SETUP

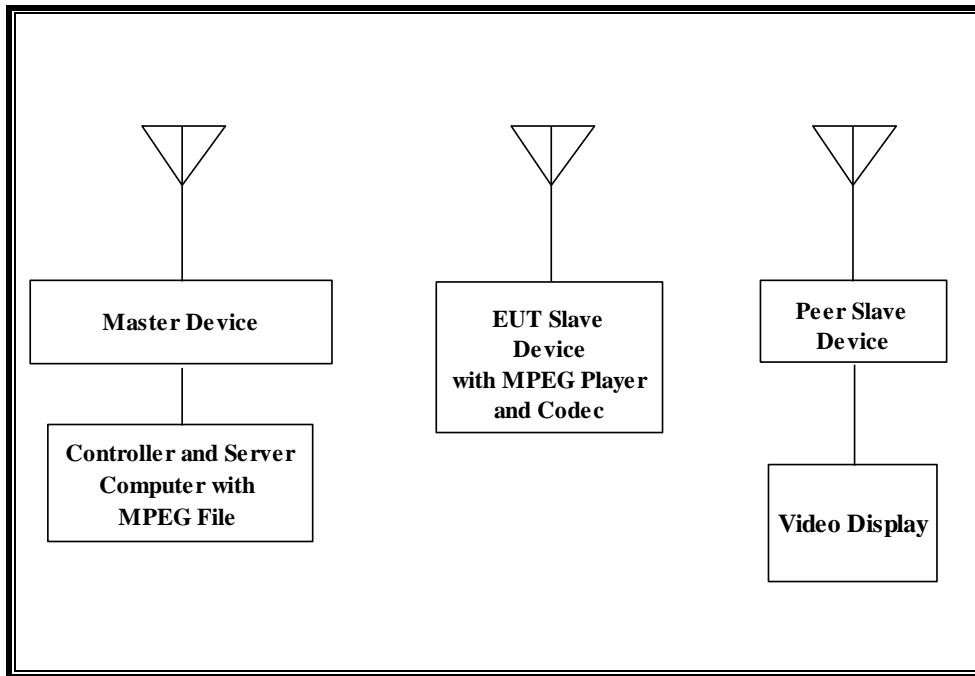

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point (Master Device)	Cisco	AIR-AP1252AG-A-K9	FTX130390D9	LDK102061
AC Adapter (AP)	Delta Electronics	EADP-45BB B	DTH1049902N	DoC
Notebook PC (Controller/Server)	Apple	MacBook Pro A1150	AOU257941	DoC
AC Adapter (Controller/Server PC)	Delta Electronics	A1330	MV952157KAGKA	DoC
Apple TV (Peer Slave)	Apple	A1469	V07JV1Z7FF54	BCGA1469
Video Display	Dell	U2410f	CN-0FJ525N-72872-1B5-AGAL	DoC

11.1.5. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 15.81 dBm EIRP in the 5250-5350 MHz band and 15.45 dBm EIRP in the 5470-5725 MHz band.

The only antenna assembly utilized with the EUT has a gain of -0.37dBi in the 5250-5350 MHz band and 1.31dBi in the 5470-5725 MHz band.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is -64 + 1 = -63 dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides margin to the limit.

The EUT uses one transmitter/receiver chain connected to an antenna to perform radiated tests.

WLAN traffic is generated by streaming the video file TestFile.mp2 "6 ½ Magic Hours" from the Master to the Slave in full motion video mode using Safari web browser.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11a/n architecture. Two nominal channel bandwidths of 20 MHz and 40 MHz are implemented.

The software installed in the EUT is 11A5400f.

UNIFORM CHANNEL SPREADING

This requirement is not applicable to Slave radio devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID: LDK102061. The minimum antenna gain for the Master Device is 3.5 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides margin to the limit.

The software installed in the access point is 12.4(25d)JA1.


11.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH

11.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

11.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

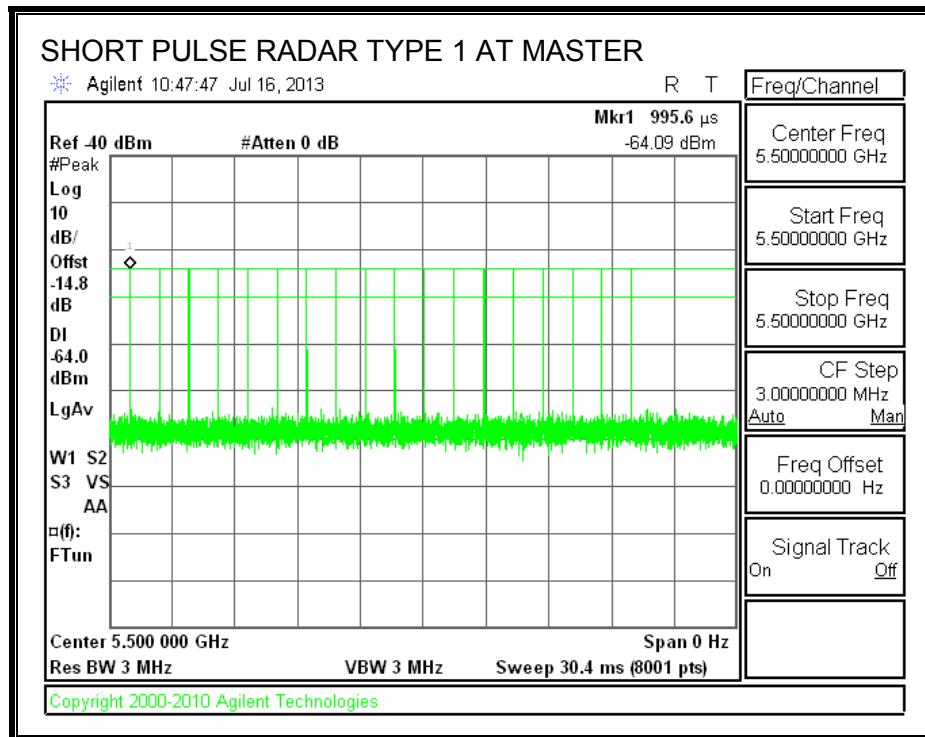

TRAFFIC

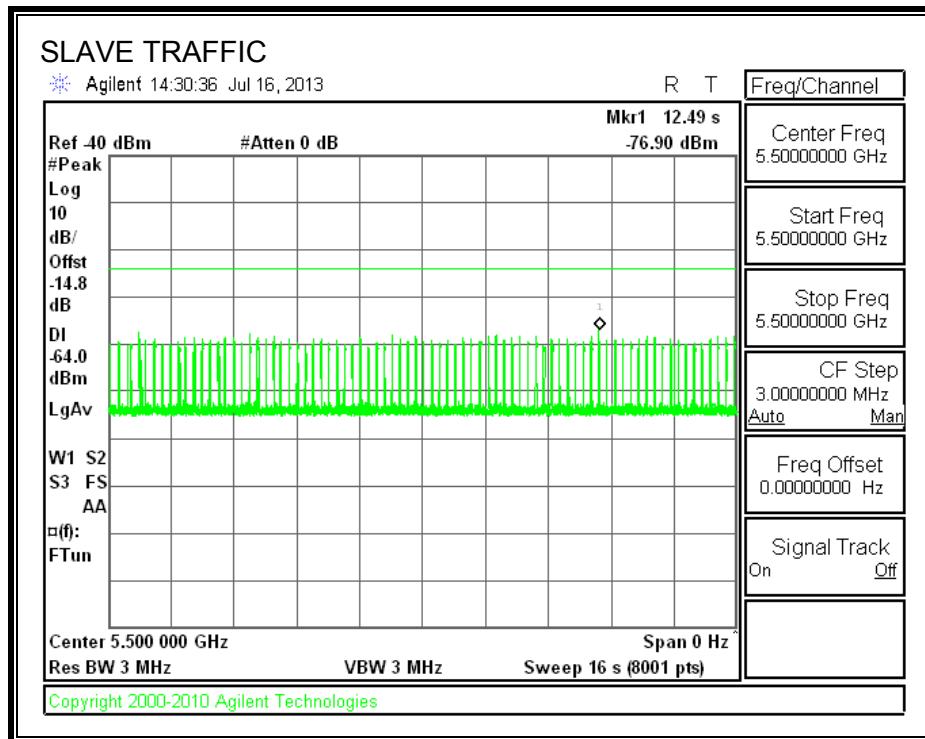

11.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

11.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	0.036	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	0.0	60
IC	2.0	260

MOVE TIME

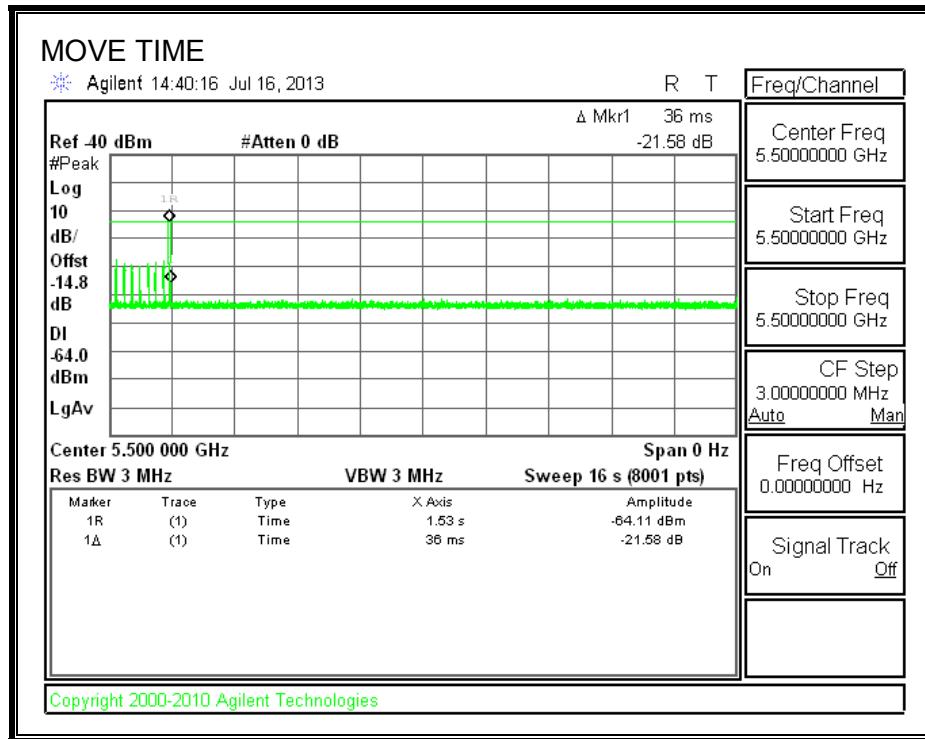


CHANNEL CLOSING TIME

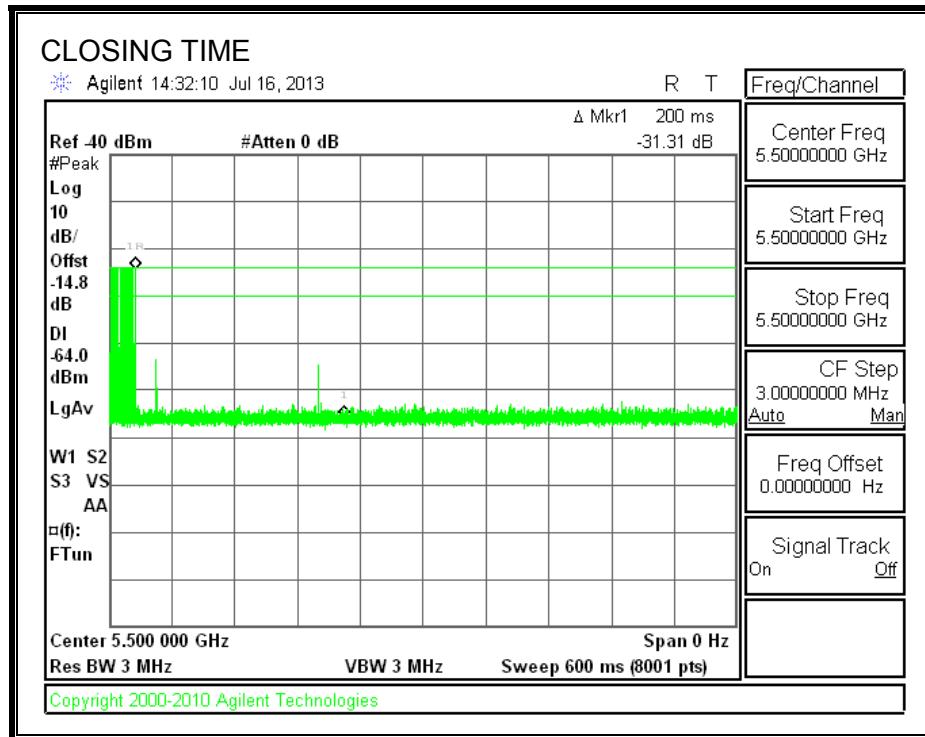


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the FCC aggregate monitoring period.

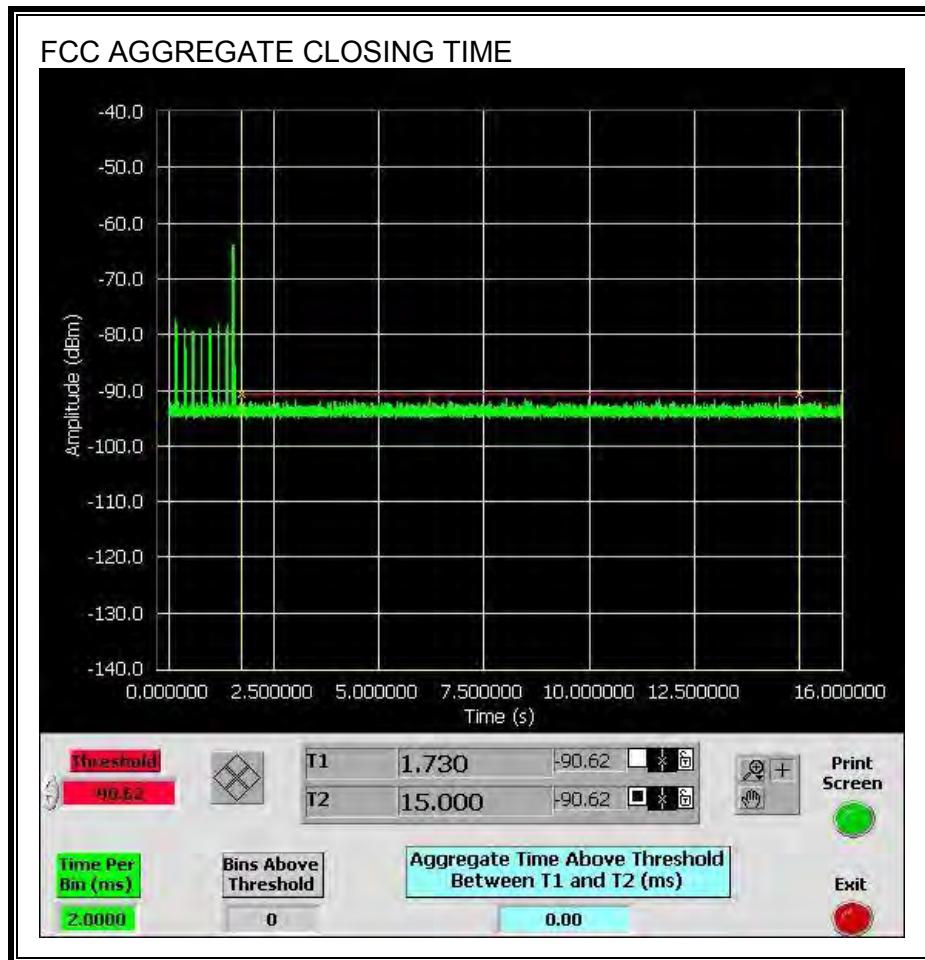

Only intermittent transmissions are observed during the IC aggregate monitoring period.

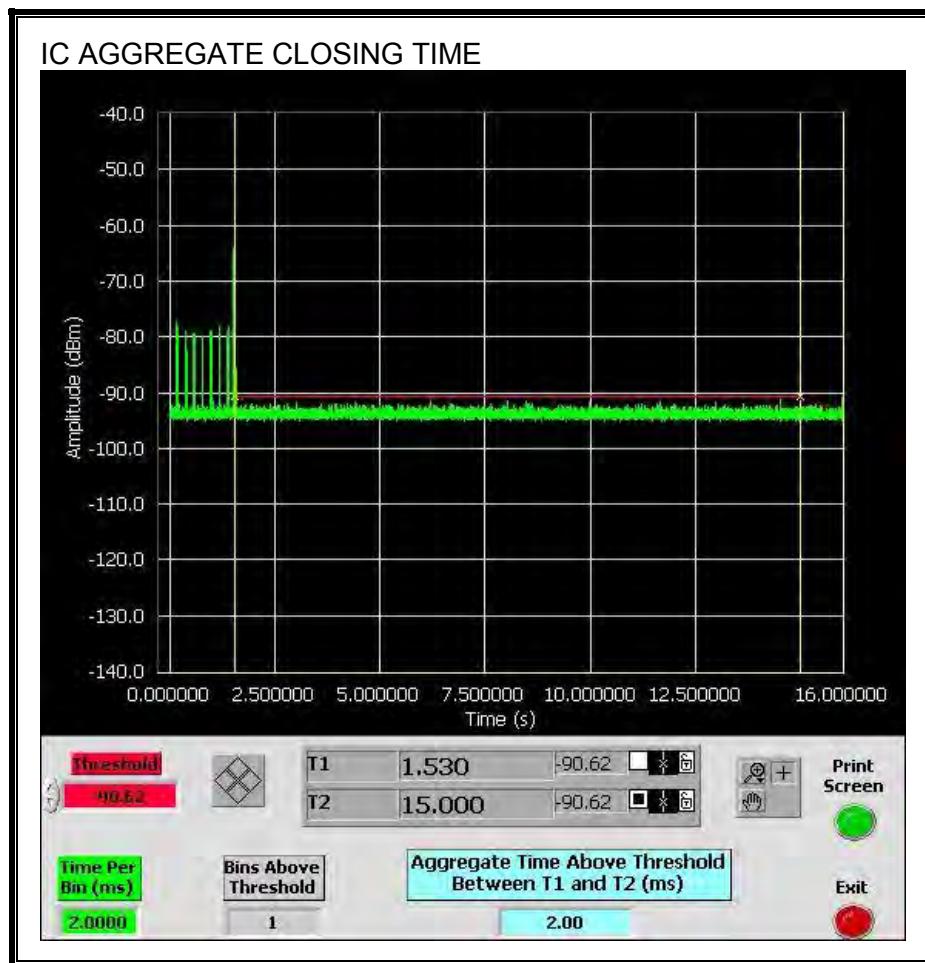


11.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH

11.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

11.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

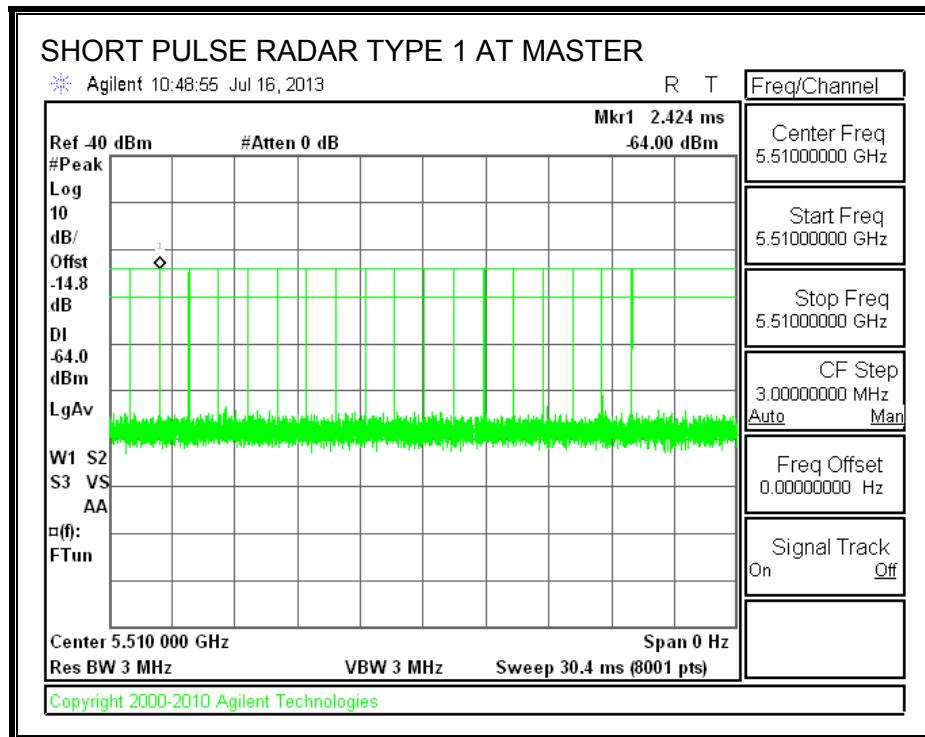

TRAFFIC

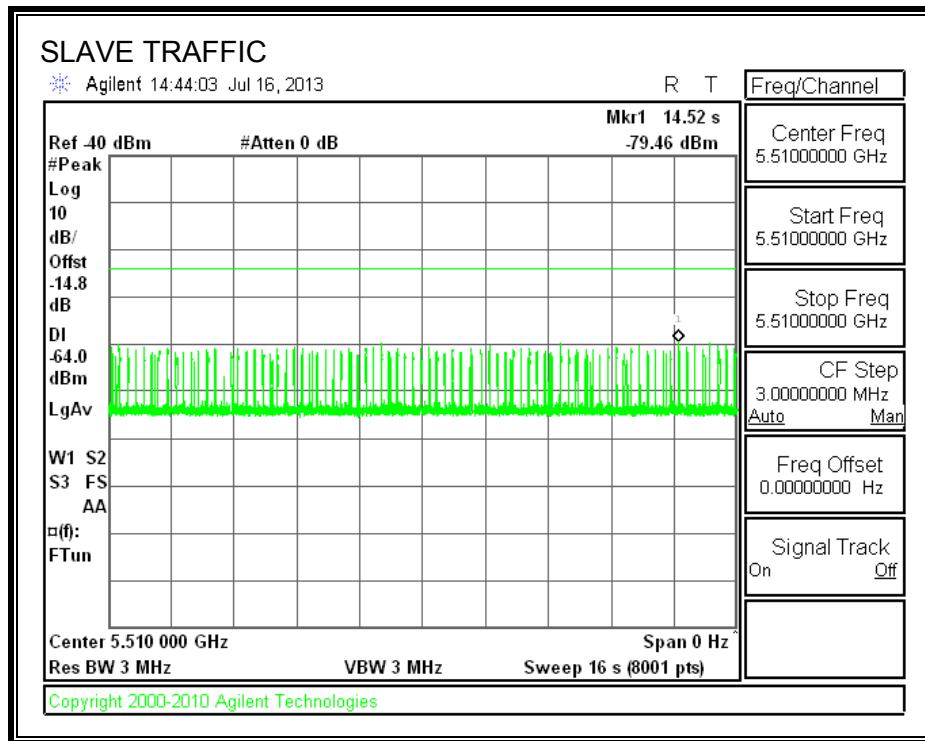

11.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

11.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	0.000	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	0.0	60
IC	0.0	260

MOVE TIME

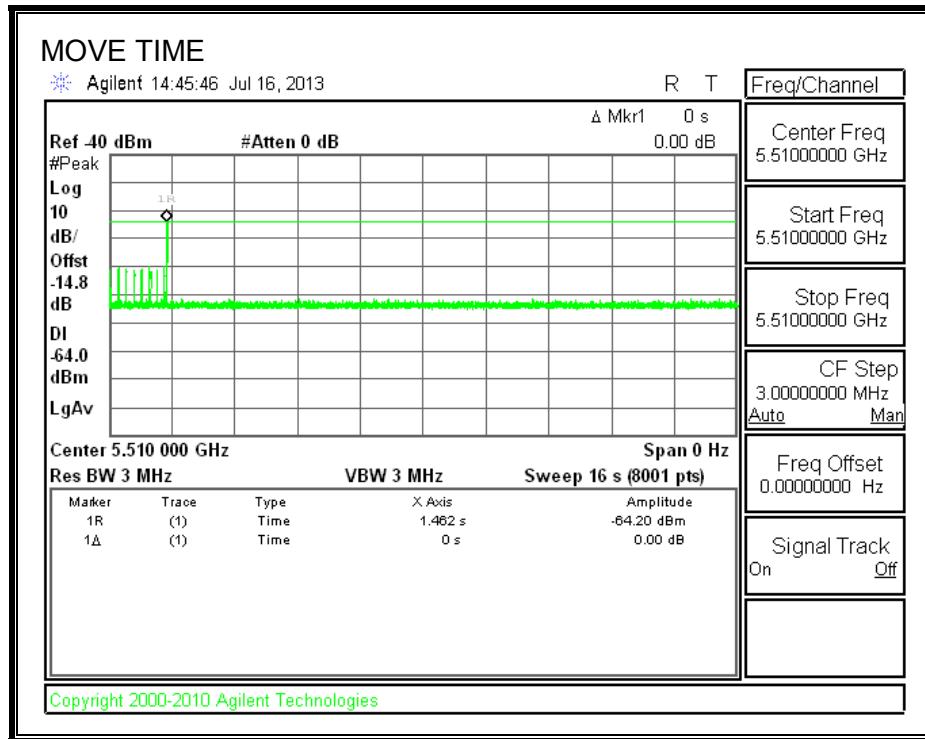


CHANNEL CLOSING TIME

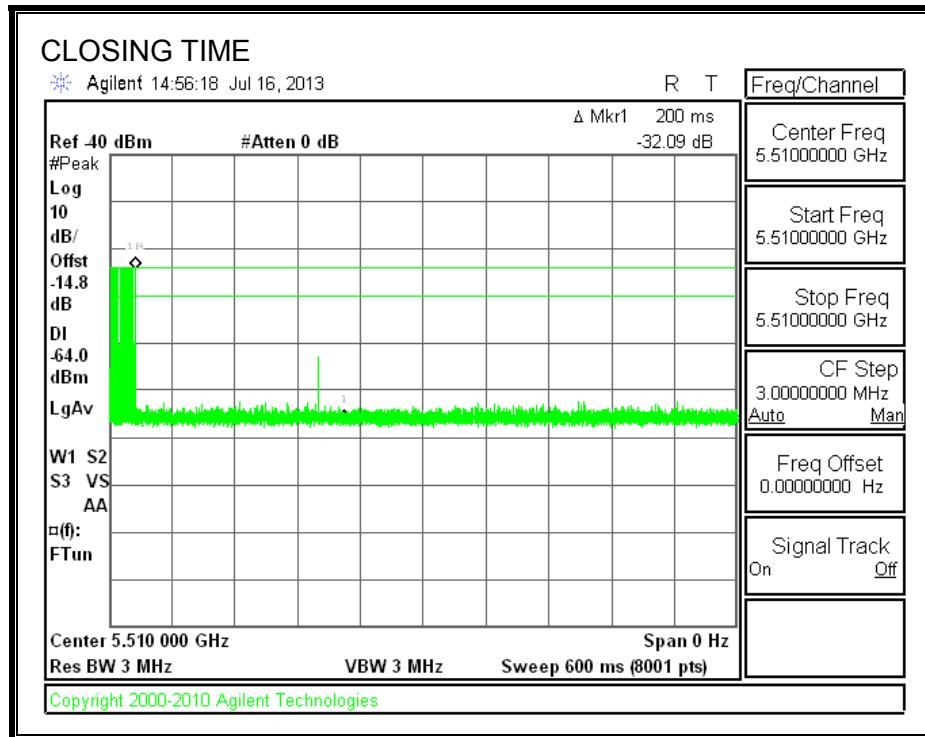


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the FCC aggregate monitoring period.

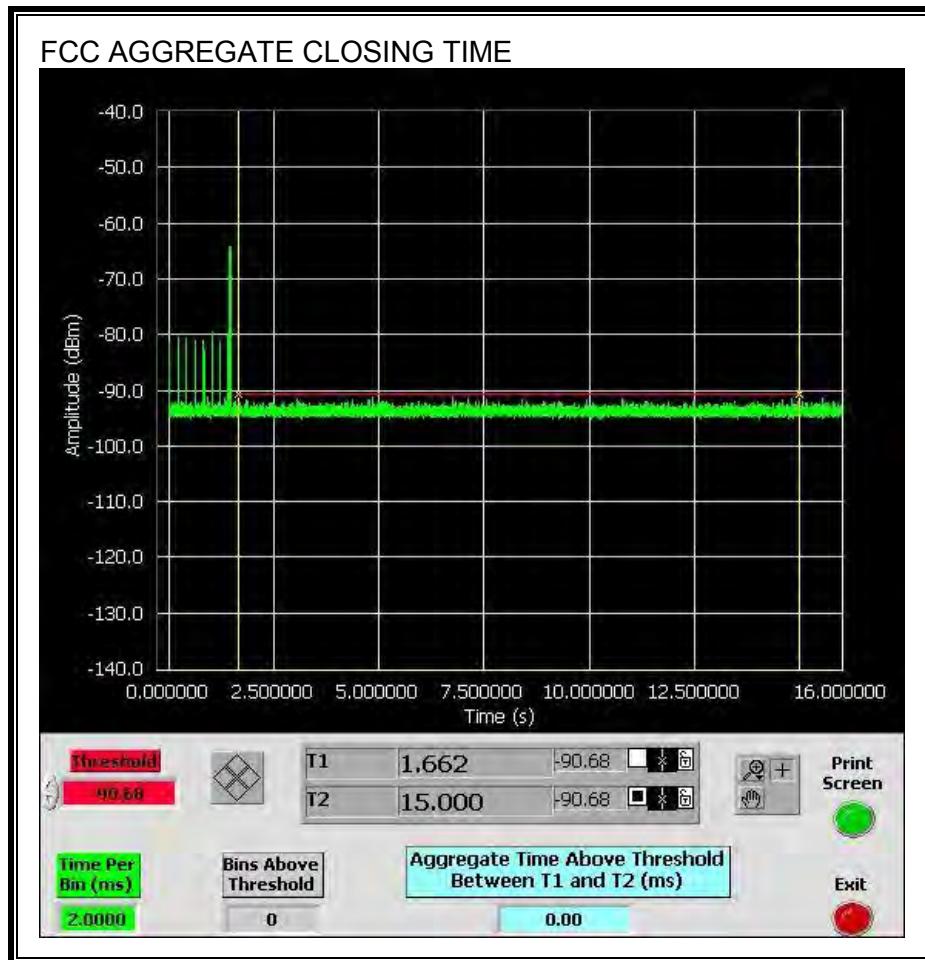


No transmissions are observed during the IC aggregate monitoring period.

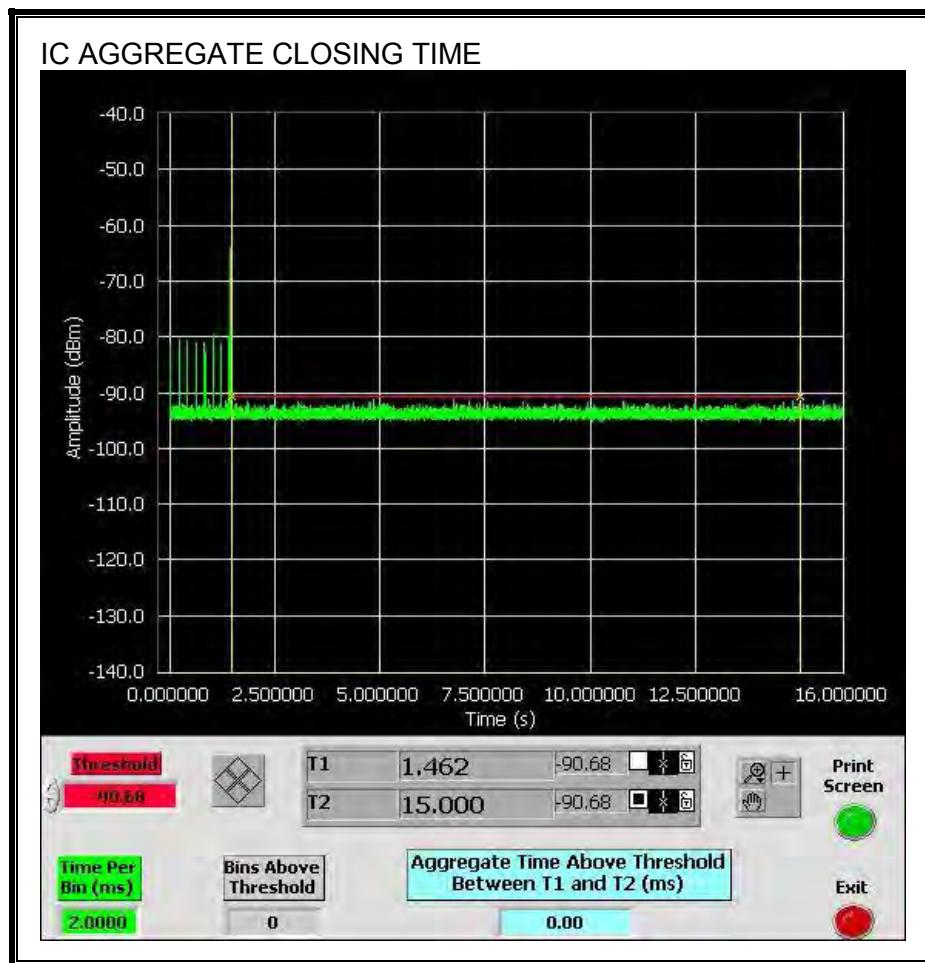

11.3.5. NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

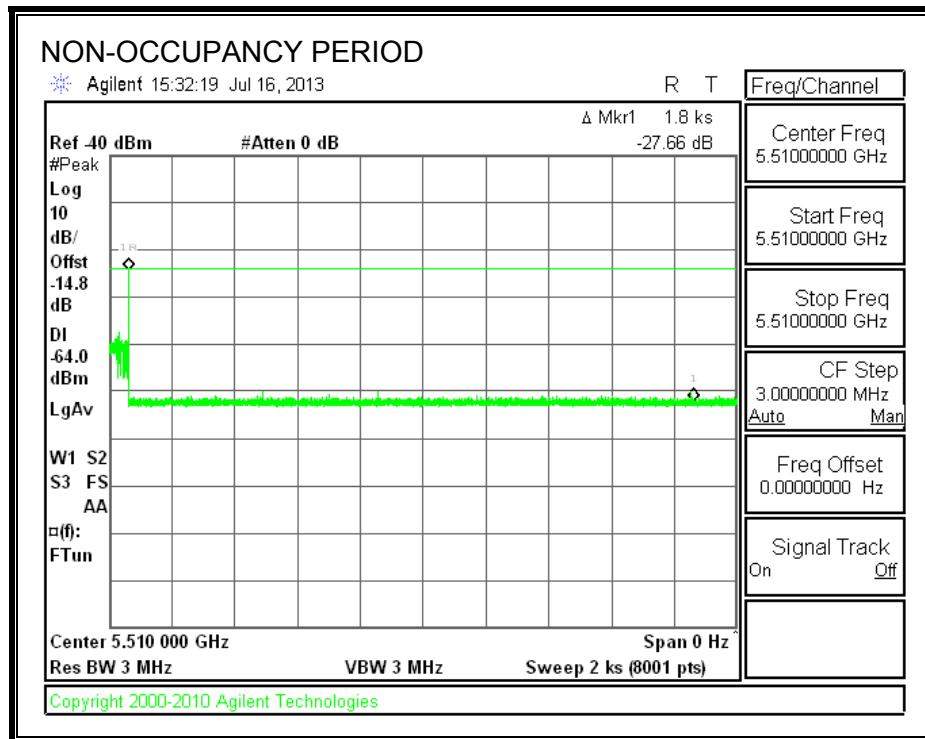


11.4. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH

11.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

11.4.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

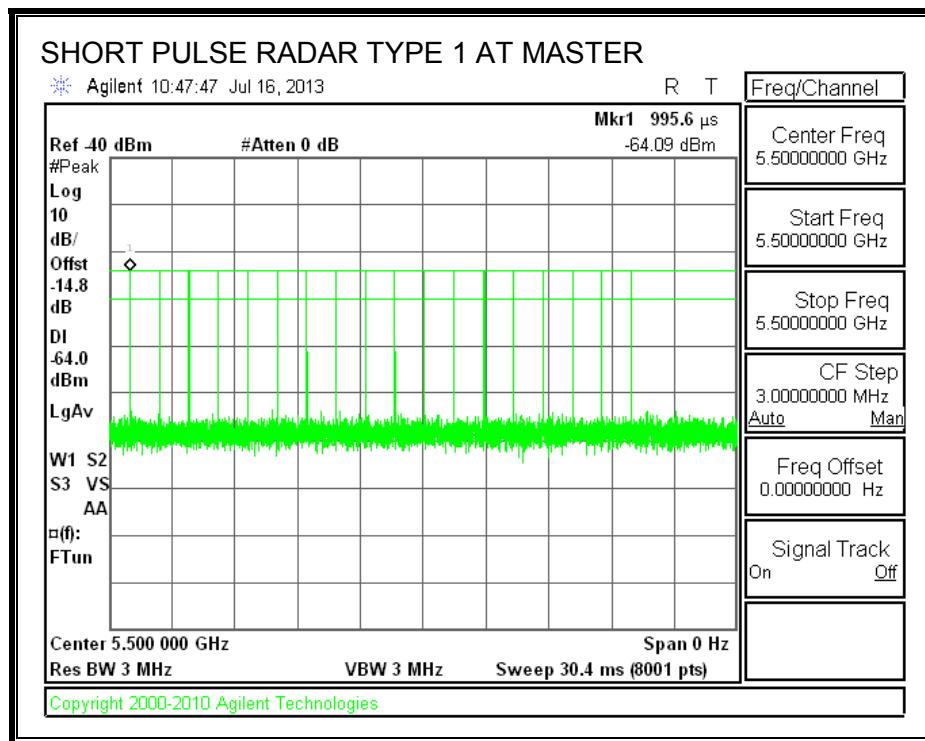

TRAFFIC

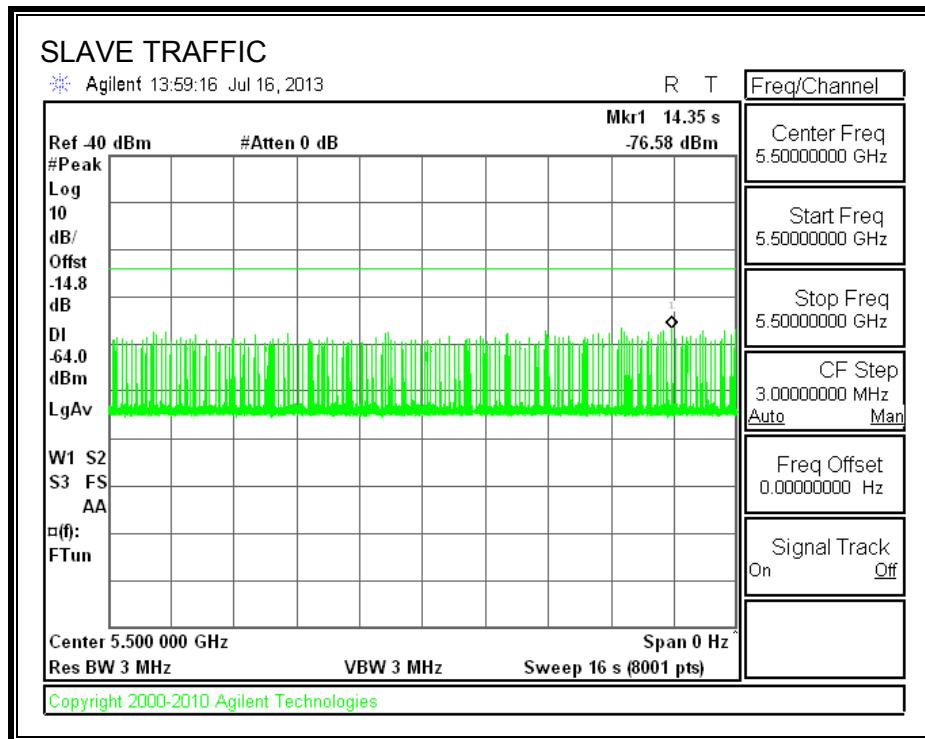

11.4.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

11.4.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	0.180	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	0.0	60
IC	10.0	260

MOVE TIME

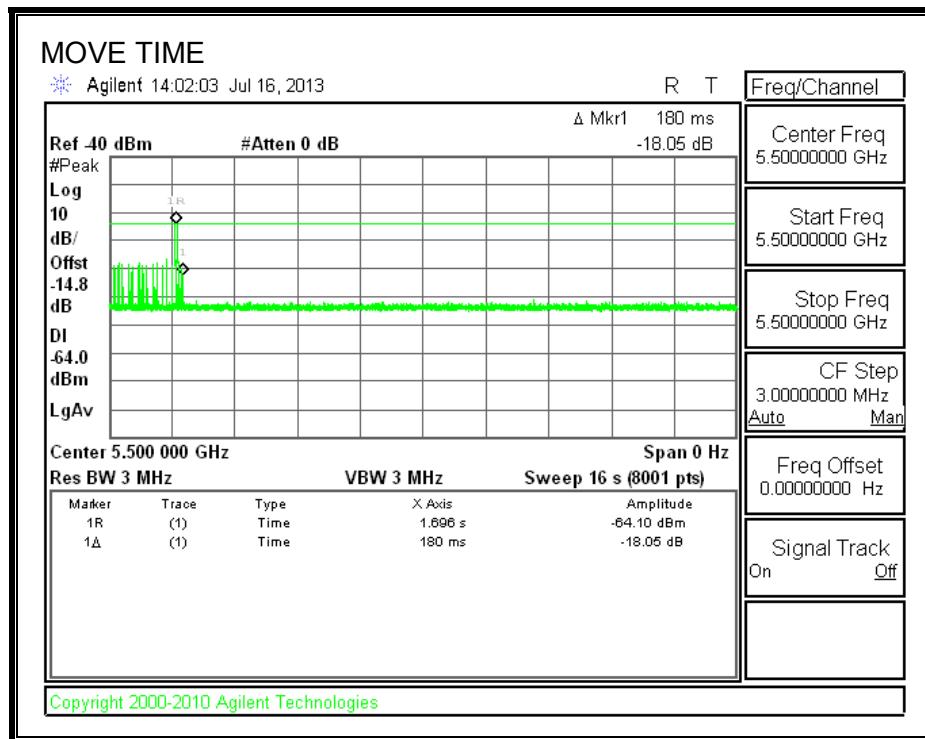


CHANNEL CLOSING TIME

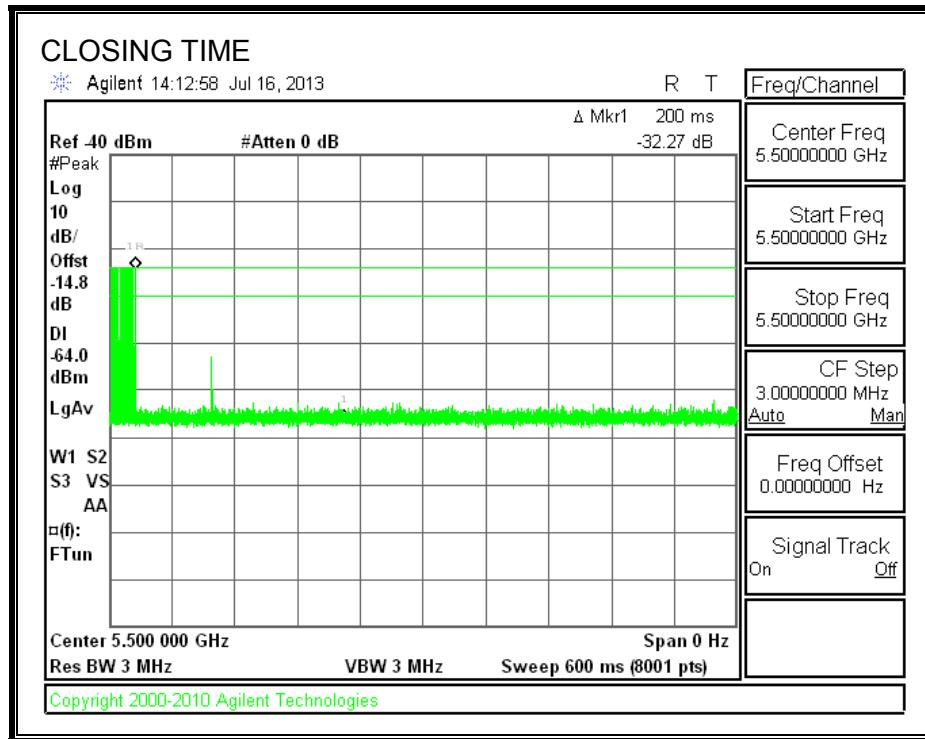


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the FCC aggregate monitoring period.

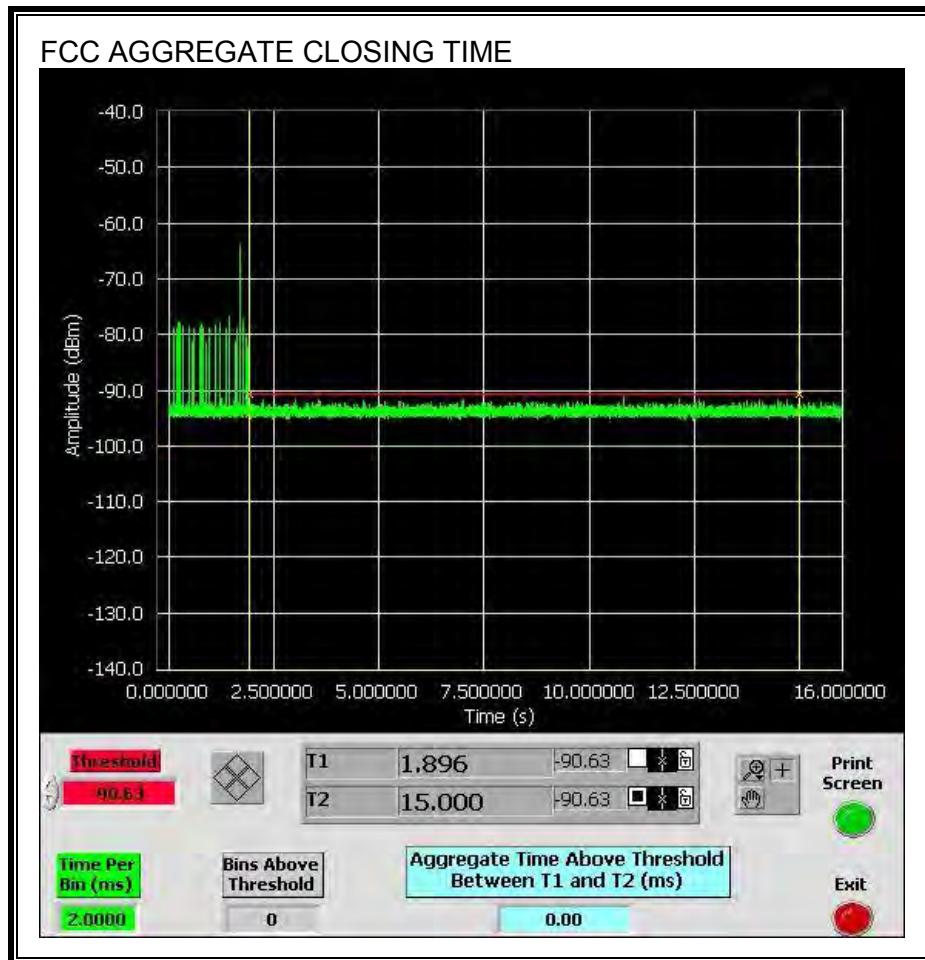

Only intermittent transmissions are observed during the IC aggregate monitoring period.

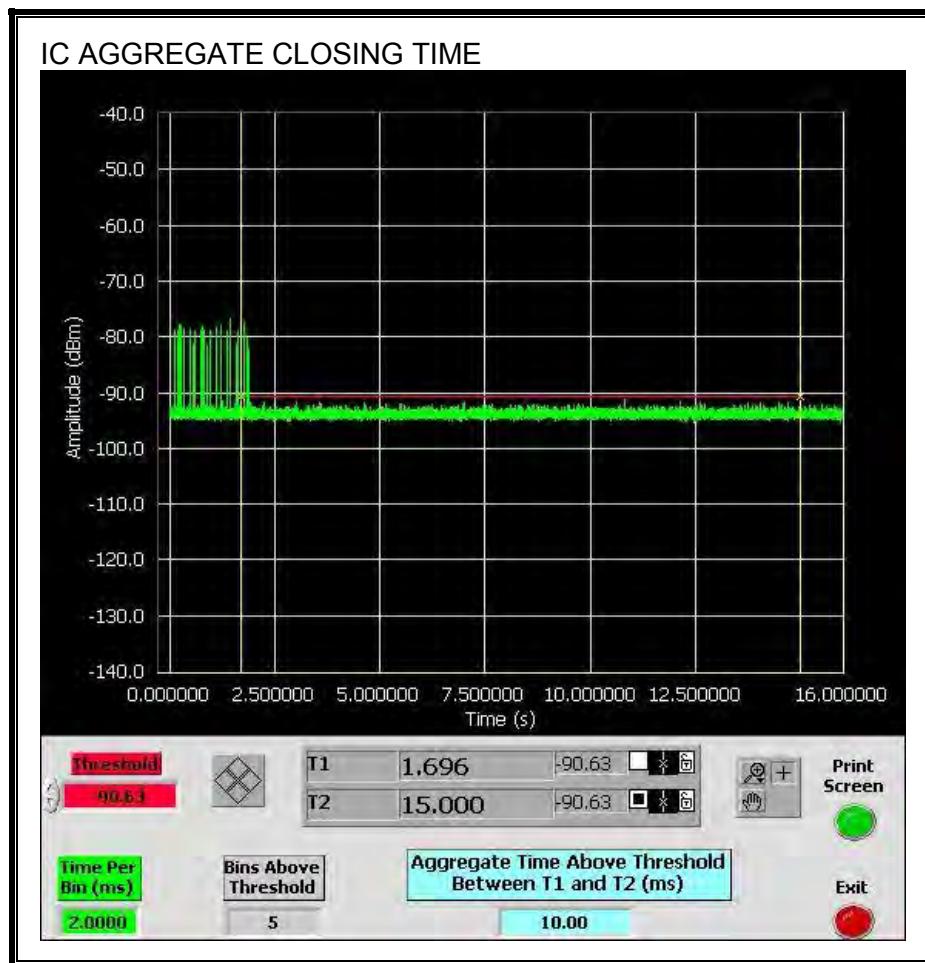


11.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH

11.5.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

11.5.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

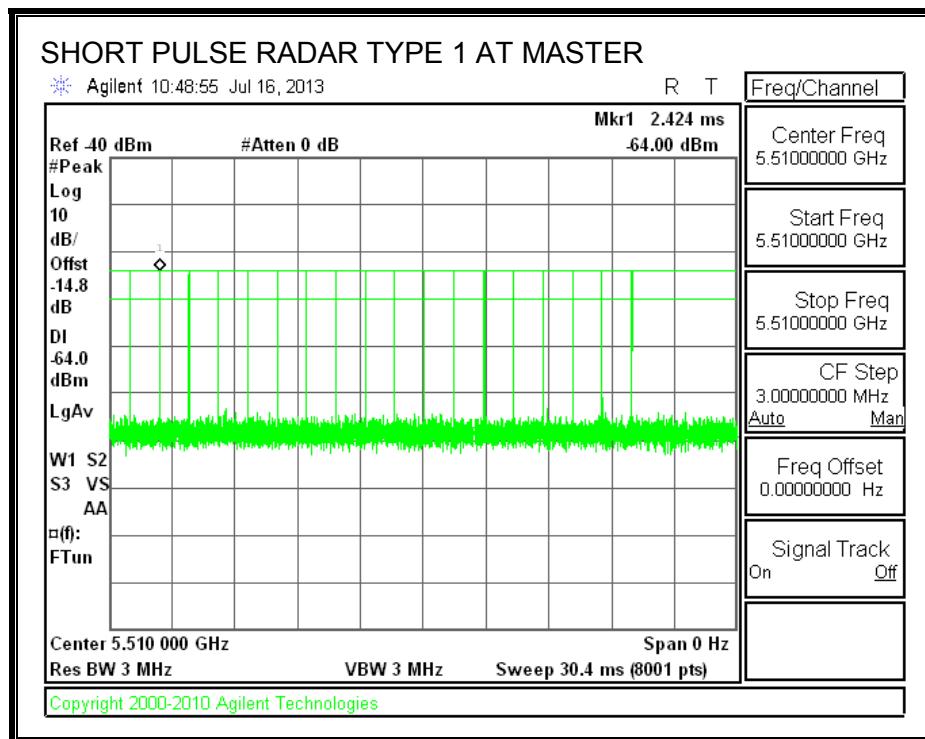

TRAFFIC

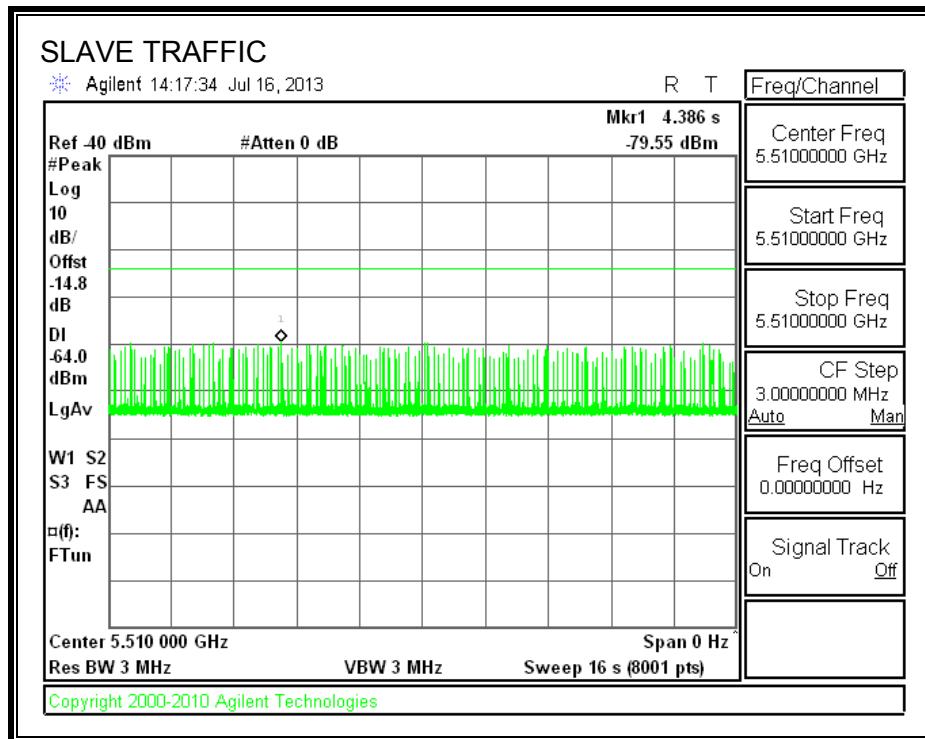

11.5.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

11.5.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	0.138	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	0.0	60
IC	4.0	260

MOVE TIME

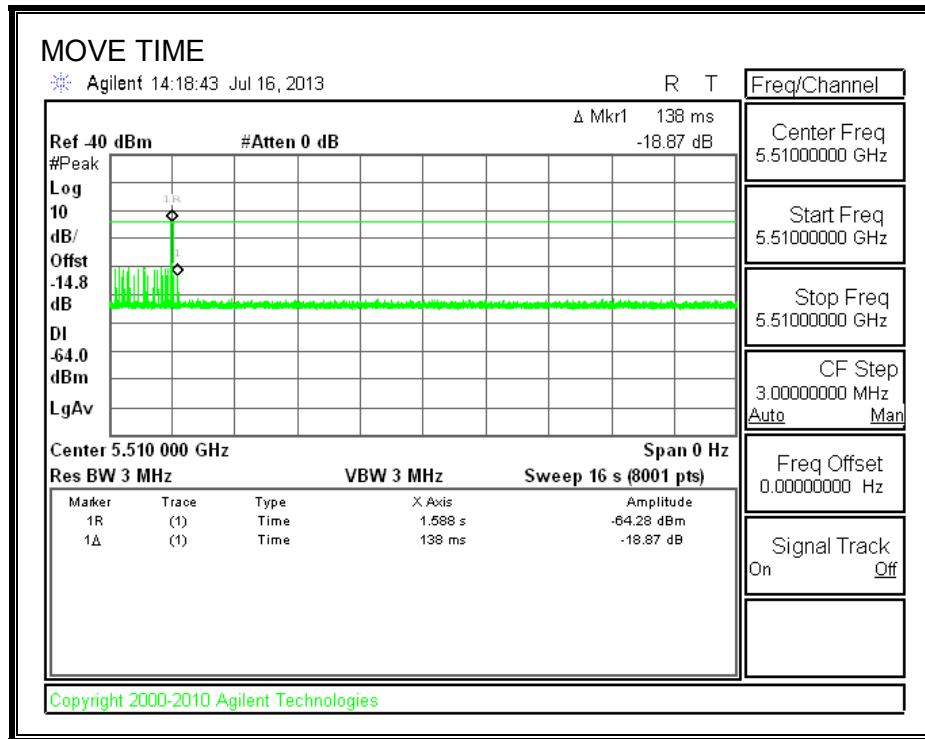


CHANNEL CLOSING TIME

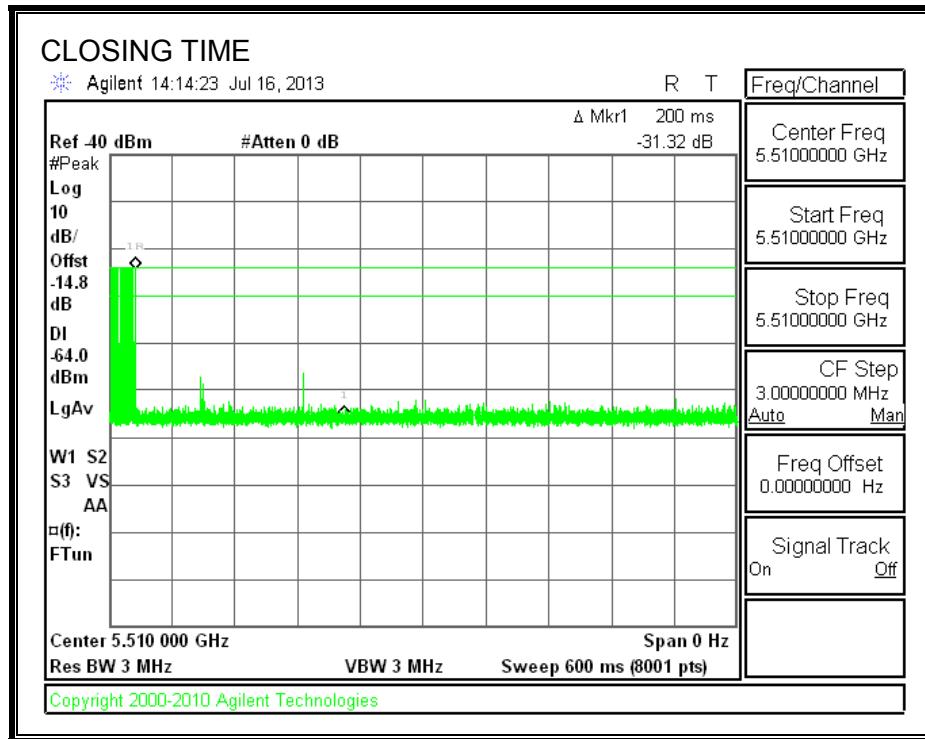

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the FCC aggregate monitoring period.

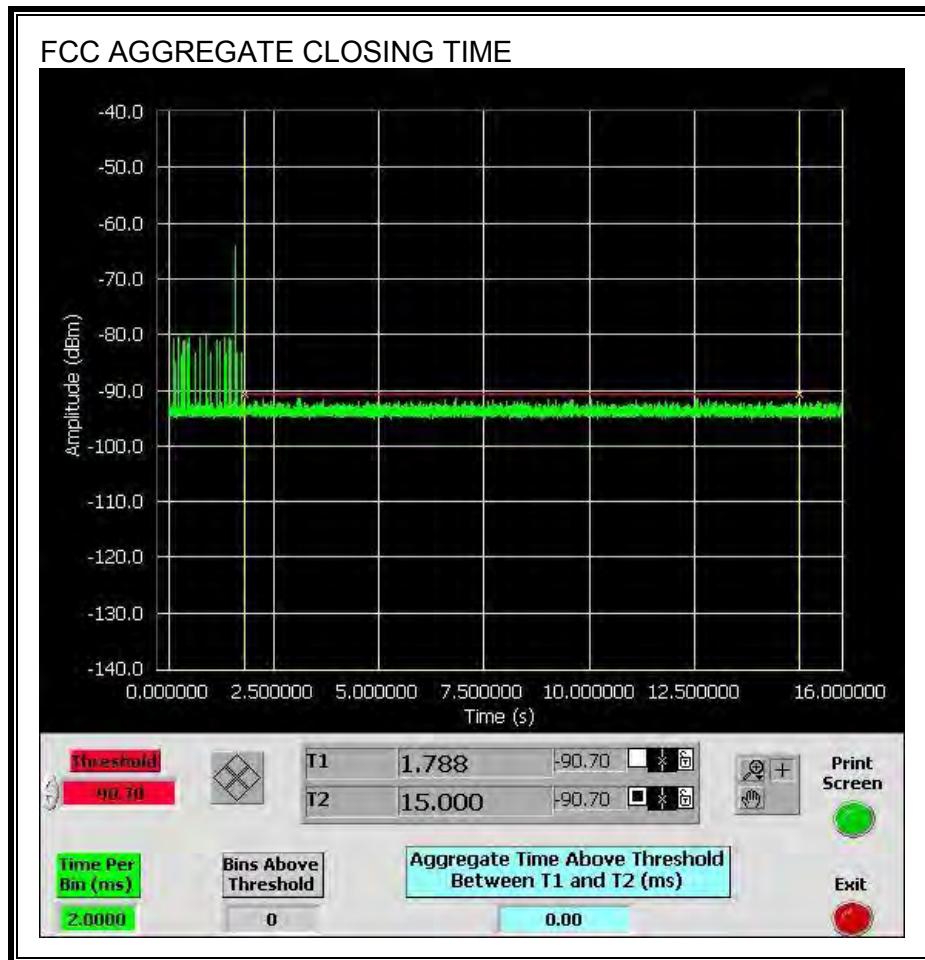

Only intermittent transmissions are observed during the IC aggregate monitoring period.

