



**FCC 47 CFR PART 22H, 24E, 27L AND 90S
CERTIFICATION TEST REPORT**

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBER: A1522

FCC ID: BCG-E2817A

REPORT NUMBER: 14U17676-E15, REVISION D

ISSUE DATE: AUGUST 27, 2014

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
	07/28/14	Initial Issue	M. Hua
A	07/30/14	Update EUT description	C. Pang
B	08/05/14	Address TCB's Questions	C. Pang
C	08/25/14	Address TCB's Questions Section 8.2.5, 8.2.7	M. Hua
D	08/27/14	Add CDMA 1x Advanced	M. Hua

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.2.1. LAT.....	8
5.2.2. UAT	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.4. SOFTWARE AND FIRMWARE.....	12
5.5. WORST-CASE CONFIGURATION AND MODE.....	12
5.6. DESCRIPTION OF TEST SETUP.....	13
6. TEST AND MEASUREMENT EQUIPMENT	15
7. RF POWER OUTPUT VERIFICATION	16
7.1. GPRS/EGPRS MODE	18
7.2. UMTS REL99.....	19
7.2.1. LAT.....	20
7.2.2. UAT	21
7.3. HSDPA REL 5	22
7.3.1. LAT.....	23
7.3.2. UAT	25
7.4. HSPA REL 6 (HSDPA & HSUPA).....	27
7.4.1. LAT.....	28
7.4.2. UAT	30
7.5. DUAL CARRIER HSDPA.....	32
7.5.1. LAT.....	34
7.5.2. UAT	36
7.6. CDMA2000 1xRTT.....	38
7.6.1. LAT.....	39
7.6.2. UAT	43
7.7. CDMA2000 1xEv-DO - Release 0 (Rel. 0)	47
7.7.1. LAT.....	48
7.7.2. UAT	49

7.8.	CDMA2000 1xEV-DO - Revision A (Rev. A)	50
7.8.1.	LAT	51
7.8.2.	UAT	52
7.9.	CDMA2000 1xEV-DO - Revision B (Rev. B)	53
7.9.1.	LAT	54
7.9.2.	UAT	55
8.	CONDUCTED TEST RESULTS	56
8.1.	OCCUPIED BANDWIDTH	56
8.1.1.	GSM-GPRS	60
8.1.2.	GSM-EGPRS	63
8.1.3.	UMTS Rel. 99	66
8.1.4.	UMTS HSDPA	71
8.1.5.	CDMA2000 1xRTT	76
8.1.6.	CDMA2000 EVDO Rev. A	82
8.1.7.	CDMA2000 EVDO Rev. B	88
8.2.	BAND EDGE	93
8.2.1.	GSM-GPRS	95
8.2.2.	GSM-EGPRS	97
8.2.3.	UMTS Rel. 99	99
8.2.4.	UMTS HSDPA	102
8.2.5.	CDMA2000 1xRTT	105
8.2.6.	CDMA2000 1xRTT BC10 MASK	110
8.2.7.	CDMA2000 EVDO Rev. A	112
8.2.8.	CDMA2000 EVDO REVA BC10 MASK	117
8.3.	OUT OF BAND EMISSIONS	119
8.3.1.	GSM-GPRS	120
8.3.2.	GSM-EGPRS	123
8.3.3.	UMTS Rel. 99	126
8.3.4.	UMTS HSDPA	131
8.3.5.	CDMA2000 1xRTT	136
8.3.6.	CDMA2000 EVDO Rev. A	142
9.	FREQUENCY STABILITY	148
9.1.	GSM	149
9.2.	WCDMA	151
9.3.	CDMA	153
10.	RADIATED TEST RESULTS	155
10.1.	RADIATED POWER (ERP & EIRP)	155
10.1.1.	LAT	157
10.1.2.	UAT	159
10.1.3.	LAT	163
10.1.4.	UAT	184
10.2.	PEAK-TO-AVERAGE RATIO	205
10.3.	FIELD STRENGTH OF SPURIOUS RADIATION	217
10.3.1.	LAT	219
10.3.2.	UAT	237

11. SETUP PHOTOS	255
-------------------------------	------------

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1522

SERIAL NUMBER: C39MF19PG1G0 (Conducted); C39MV008G30C (Radiated)

DATE TESTED: MAY 18 –JULY 25, and AUGUST 25, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27L and 90S	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
UL Verification Services Inc.

Tested By:



Mona Hua
Lab Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, and Part 90.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F
	☐ Chamber G
	☐ Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	±3.52 dB
Radiated Disturbance, 30 to 1000 MHz	±4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a mobile phone with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1x RTT/1x Advanced/EVDO Rev.A/ EVDO Rev.B /WCDMA /HSPA+/DC-HSDPA/LTE FDD & Carrier Aggregation radio, IEEE 802.11a/b/g/n/ac radio, Bluetooth radio and NFC. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak or average conducted and ERP / EIRP output powers as follows:

5.2.1. LAT

GSM MODES

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 - 849	GPRS	33.45	2213.1	28.35	683.9
	EGPRS	29.00	794.3	24.00	251.2

Part 24 1900MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 - 1910	GPRS	29.90	977.2	32.40	1737.8
	EGPRS	28.00	631.0	29.52	895.4

WCDMA MODES

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 – 849	REL 99	24.70	295.1	20.19	104.5
	HSDPA REL 5	23.97	249.5	19.34	85.9

Part 24 1900MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	REL 99	24.90	309.0	27.72	591.6
	HSDPA	23.99	250.6	26.80	478.6

Part 27 1700MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP(Average)	
		dBm	mW	dBm	mW
1710 - 1755	REL 99	25.00	316.2	27.09	511.7
	HSDPA	24.00	251.2	26.19	415.9

CDMA2000 MODES

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 – 849	CDMA 1xRTT	24.92	310.5	20.40	109.65
	CDMA EVDO A	25.00	316.2	20.30	107.15

Part 24 1900MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	CDMA 1xRTT	24.98	314.8	27.78	599.8
	CDMA EVDO A	24.86	306.2	27.90	616.6

Part 27 1700MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP(Average)	
		dBm	mW	dBm	mW
1710 – 1755	CDMA 2000 1xRTT	24.95	312.6	27.33	540.8
	CDMA 2000 EVDO-Rev A	25.00	316.2	27.53	566.2

Part 90 800MHz SECONDARY BAND					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
817 - 824	CDMA 1xRTT	25.00	316.2	20.3	106.7
	CDMA EVDO A	24.92	310.5	20.2	105.2

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
2 CARRIER MIN	CDMA EVDO B	21.90	154.9	17.21	52.6
2 CARRIER MAX	CDMA EVDO B	21.66	146.6	16.97	49.8
3 CARRIER MIN	CDMAEVDO B	21.79	151.0	16.43	44.0

5.2.2. UAT

GSM MODES

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 - 849	GPRS	33.10	2041.7	27.10	512.9
	EGPRS	28.51	709.6	22.52	178.6

Part 24 1900MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 - 1910	GPRS	29.54	899.5	30.01	1002.3
	EGPRS	27.30	537.0	29.03	799.8

WCDMA MODES

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 – 849	REL 99	24.70	295.1	18.74	74.8
	HSDPA	23.61	229.6	17.87	61.2

Part 24 1900MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	REL 99	21.00	125.9	23.07	202.8
	HSDPA	19.99	99.8	22.03	159.6

Part 27 1700MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP(Average)	
		dBm	mW	dBm	mW
1710 – 1755	REL 99	21.25	133.4	22.46	176.2
	HSDPA	20.00	100.0	21.56	143.2

CDMA2000 MODES

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 – 849	CDMA 1xRTT	24.52	283.1	18.58	72.1
	CDMA EVDO A	24.60	288.4	18.73	74.6

Part 24 1900MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	CDMA 1xRTT	21.00	125.9	22.71	186.6
	CDMA EVDO A	21.00	125.9	22.82	191.4

Part 27 1700MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		EIRP(Average)	
		dBm	mW	dBm	mW
1710 – 1755	CDMA 1xRTT	21.20	131.8	22.46	176.2
	CDMA EVDO A	21.20	131.8	22.63	183.2

Part 90 800MHz SECONDARY BAND					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
817 - 824	CDMA 1xRTT	24.36	272.9	17.46	55.7
	CDMA EVDO A	24.52	283.1	17.64	58.1

Part 22 850MHz Band					
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
2 CARRIER MIN	CDMA EVDO B	21.30	134.9	13.72	23.6
2 CARRIER MAX	CDMA EVDO B	21.25	133.4	13.64	23.1
3 CARRIER MIN	CDMAEVDO B	21.26	133.7	13.74	23.7

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a band gap type integral antenna for the following bands with a maximum peak gain as follow: LAT: Port A, UAT: Port B.

Frequency (MHz)	Gain (dBi) LAT	Gain (dBi) UAT
BC10 , 814 - 824	-2.3	-4.2
Cell , 824 - 849	-2.3	-3.8
PCS , 1850 - 1910	2.9	2.2
AWS , 1710 - 1755	2.7	1.6

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 12A310 Baseband 0.26.01. The EUT is linked with Agilent 8960, Anritsu MT8820C, and CMW500 Communication Test Sets.

5.5. WORST-CASE CONFIGURATION AND MODE

Based on the investigation results, the highest peak power and enhanced data rate is the worst-case scenario for all measurements.

For the device, all tests were performed as below,

_Port A: Both conducted and radiated emissions measurement with all bands.

_Port B: All conducted emissions measurement and only ERP/EIRP radiated emissions on all bands.

X-position is the worst-case for all modes below:

- For Cellular and PCS band: 1xRTT (SO55)
- For Cellular and PCS band: CDMA2000 1xEV-DO Rev. A.
- For Cellular and PCS band: GPRS and EGPRS
- For Cellular and PCS band: UMTS, REL 99 and HSDPA

For the fundamental investigation, since the EUT is a portable device that has three orientations; an X, Y and Z orientations and the worst among X, Y, and Z with AC/DC adapter and headset have been investigated. The worst case was found to be at X-position (flatbed) without AC/DC adapter and headset for all cell and pcs bands

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC Adapter	Dell	Latitude 3540	NA
DC Power Supply	Dell	H65NM130	426-03P6-A00
EUT AC Adapter	Apple	A1385	D292365COYADHLHC3

I/O CABLES (RF Conducted Test)


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	2m	N/A
3	RF In/Out	1	EUT	Un-shielded	1m	N/A
4	RF In/Out	1	Spectrum Analyzer	Un-shielded	1m	N/A
5	RF In/Out	1	Communication Test Set	Un-shielded	None	N/A

I/O CABLES (RF Radiated Test)


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5m	NA

TEST SETUP

CONDUCTED SETUP

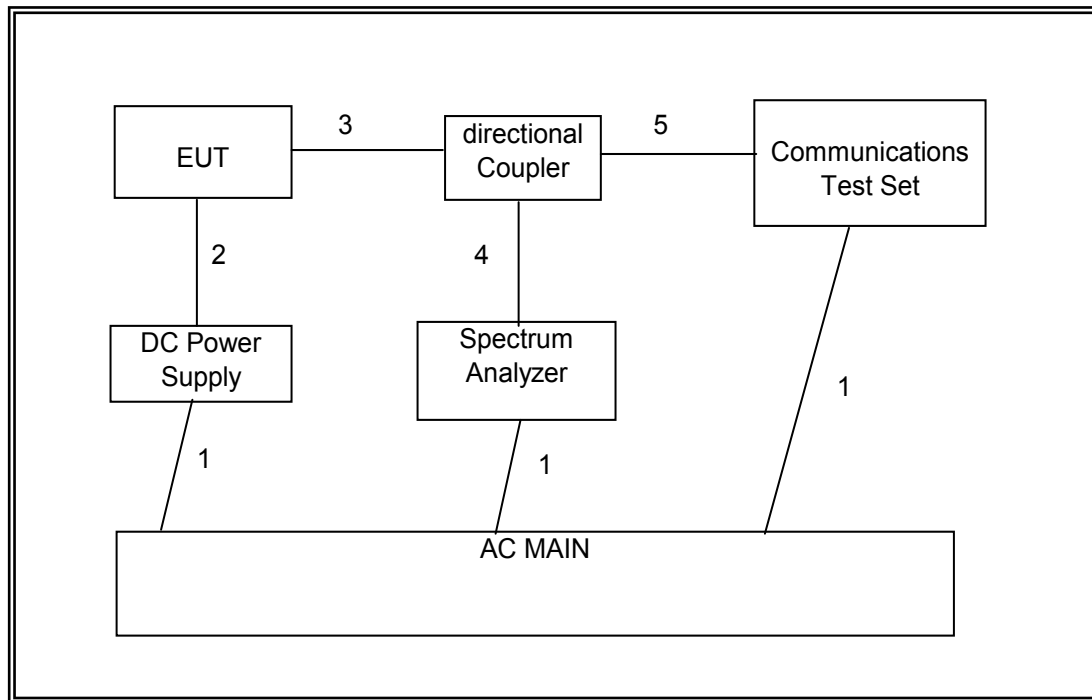

RADIATED SETUP

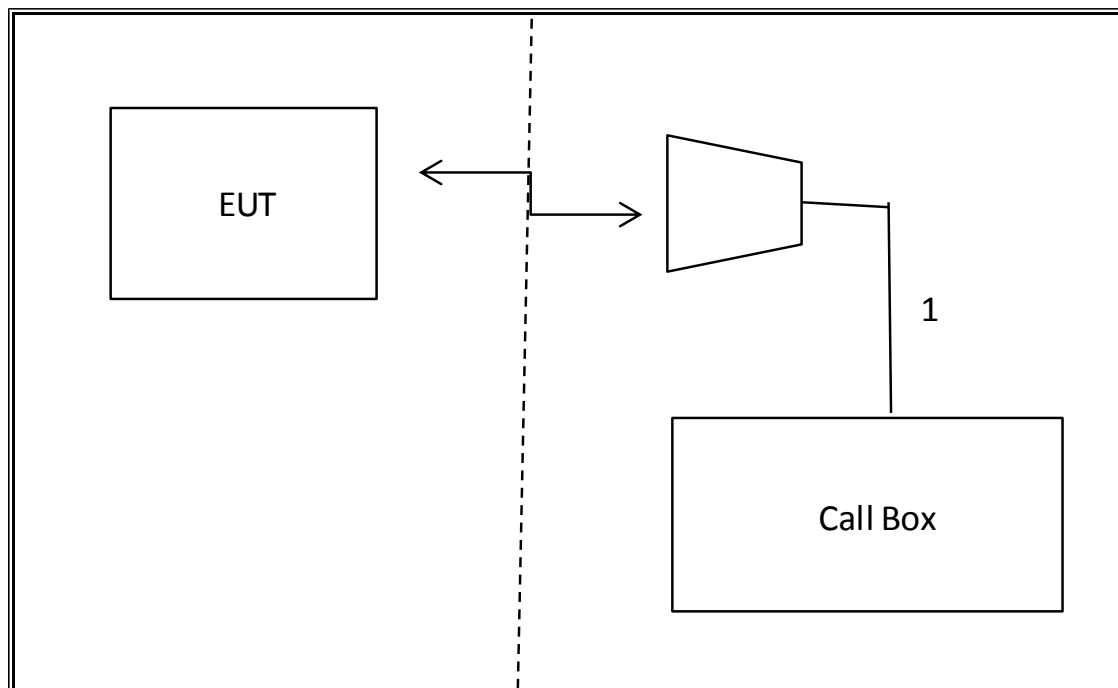

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report.

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Directional Coupler	Krytar	Directional Coupler	Krytar	CNR
Wideband Radio Communication	R & S	CMW500	None	05/29/15
Temperature / Humidity Chamber	CSZ	ZPHS-8-3.5-SCT/WC	None	10/14/14
Signal Generator, 100KHz - 6GHz	Agilent	8665B	F00124	03/12/15
8960 series 10 wireless	Agilent	E5515E	F00362	09/11/14
Spectrum Analyzer, PXA, 44GHz	Agilent	N9030A	None	05/17/15
Antenna, Tuned Dipole 400~1000	ETS Lindgren	3121C DB4	C00993	01/23/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02686	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
HighPass Filter 1GHz	Micro-Tronics	HPM18129	None	CNR
Power Meter	Agilent	N1911A	F00022	4/9/2015
Power Sensor	Agilent	E9323A	F00153	03/06/15
Antenna, Horn 1-18GHz	ETS Lindgren	3117	None	04/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00872	01/06/15
Amplifier, 1 to 18GHz	Miteq	AMF-5D-01001800-40-20P	F00394	11/27/14
Amplifier	Sonoma	310	F00008	05/28/15
Antenna, Biconolog, 30MHz-1	Sunol Sciences	JB3	F00027	05/05/15

7. RF POWER OUTPUT VERIFICATION

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

Using CMU200 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 4 (GPRS) and MCS5-9 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press **Signal On** to turn on the signal and change settings

Using Agilent 8960A Communication Test Set

System Config: GSM/GPRS Mobile Test
E1968A A.06.31

Call Params: BCH → Cell Band: GSM850/PCS
TCH → Traffic Band: GSM850/PCS
Traffic Channel: 128/192/251 or 512/661/810
MS Tx Level: 0
PDTCH → Traffic Band: GSM850/PCS
Traffic Channel: 128/192/251 512/661/810
MS Tx Level: 0
Coding Scheme: CS-4 (GPRS)
Coding Scheme: MCS-5 to 9 (EGPRS)
MultiSlot Config: 1up, 1 down (Assuming that the highest
conducted power)

Control: Active Cell → GSM/GPRS

7.1. GPRS/EGPRS MODE

LAT Part 22/24

Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	33.50	33.40	32.50	32.40
	190	836.6	33.60	33.45	32.60	32.45
	251	848.8	33.50	33.42	32.40	32.30
EGPRS	128	824.2	32.06	28.90	31.70	28.70
	190	836.6	32.10	29.00	31.80	28.80
	251	848.8	32.00	28.84	31.70	28.65
GPRS	512	1850.2	30.03	29.90	29.50	29.28
	661	1880.0	30.10	29.78	29.60	29.20
	810	1909.8	30.20	29.80	29.40	29.18
EGPRS	512	1850.2	31.10	27.90	30.70	27.73
	661	1880.0	31.20	28.00	30.80	27.80
	810	1909.8	31.02	27.80	30.60	27.70

UAT Part 22/24

Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	33.20	33.10	32.20	32.00
	190	836.6	33.10	33.05	32.30	32.14
	251	848.8	33.10	33.05	32.20	32.10
EGPRS	128	824.2	31.30	28.51	31.10	28.38
	190	836.6	31.20	28.45	31.20	28.30
	251	848.8	31.10	28.40	31.10	28.26
GPRS	512	1850.2	29.60	29.50	26.70	26.57
	661	1880.0	29.70	29.49	26.70	26.50
	810	1909.8	29.60	29.54	26.70	26.40
EGPRS	512	1850.2	29.85	27.20	29.35	26.57
	661	1880.0	30.00	27.30	29.25	26.50
	810	1909.8	29.57	27.20	29.20	26.53

7.2. UMTS REL99

The following summary of these settings are illustrated below:

WCDMA General Settings	Mode	Rel99
	Subtest	-
	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

RESULTS

7.2.1. LAT

Part 22 850MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS850 (Band 5)	4132	4357	826.4	28.80	24.70
	4180	4405	836.0	29.00	24.69
	4230	4455	846.6	28.80	24.60

Part 24 1900MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1900 (Band 2)	9262	9662	1852.4	29.15	24.85
	9400	9800	1880.0	29.30	24.90
	9538	9938	1907.6	29.20	24.80

Part 27 1700MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1700 (Band 4)	1312	1537	1712.4	29.10	25.00
	1413	1638	1732.6	29.00	24.80
	1513	1738	1752.6	29.05	24.90

7.2.2. UAT

Part 22 850MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS850 (Band 5)	4132	4357	826.4	28.30	24.53
	4180	4405	836.0	28.50	24.70
	4230	4455	846.6	28.30	24.57

Part 24 1900MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1900 (Band 2)	9262	9662	1852.4	25.11	20.91
	9400	9800	1880.0	25.37	21.00
	9538	9938	1907.6	25.10	20.93

Part 27 1700MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1700 (Band 4)	1312	1537	1712.4	25.00	21.07
	1413	1638	1732.6	25.30	21.25
	1513	1738	1752.6	25.20	21.16

7.3. HSDPA REL 5

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Summary of settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Result

7.3.1. LAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	28.38	23.90
		4180	4405	836.0	28.34	23.91
		4230	4455	846.0	28.28	23.85
	2	4132	4357	826.4	28.61	23.88
		4180	4405	836.0	28.93	23.97
		4230	4455	846.0	28.77	23.89
	3	4132	4357	826.4	28.64	23.79
		4180	4405	836.0	28.59	23.84
		4230	4455	846.0	28.48	23.88
	4	4132	4357	826.4	28.53	23.83
		4180	4405	836.0	28.31	23.86
		4230	4455	846.0	28.35	23.80

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	28.36	23.90
		9400	9800	1880.0	28.48	23.89
		9538	9938	1907.6	28.57	23.79
	2	9262	9662	1852.4	28.65	23.93
		9400	9800	1880.0	28.83	23.99
		9538	9938	1907.6	28.58	23.92
	3	9262	9662	1852.4	28.48	23.89
		9400	9800	1880.0	28.46	23.81
		9538	9938	1907.6	28.22	23.79
	4	9262	9662	1852.4	28.45	23.86
		9400	9800	1880.0	28.39	23.85
		9538	9938	1907.6	28.43	23.85

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	28.11	23.62
		1413	1638	1732.6	28.36	23.98
		1513	1738	1752.6	28.39	23.94
	2	1312	1537	1712.4	28.43	24.00
		1413	1638	1732.6	28.29	23.91
		1513	1738	1752.6	28.48	23.90
	3	1312	1537	1712.4	28.34	23.48
		1413	1638	1732.6	28.70	23.46
		1513	1738	1752.6	28.68	23.50
	4	1312	1537	1712.4	28.81	23.50
		1413	1638	1732.6	28.12	23.49
		1513	1738	1752.6	27.89	23.39

7.3.2. UAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	28.35	23.53
		4180	4405	836.0	28.61	23.37
		4230	4455	846.0	28.54	23.50
	2	4132	4357	826.4	28.39	23.58
		4180	4405	836.0	28.64	23.61
		4230	4455	846.0	28.45	23.60
	3	4132	4357	826.4	28.56	23.09
		4180	4405	836.0	28.58	23.12
		4230	4455	846.0	28.60	23.18
	4	4132	4357	826.4	28.47	23.09
		4180	4405	836.0	28.56	23.11
		4230	4455	846.0	28.53	23.17

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	24.71	19.64
		9400	9800	1880.0	24.69	19.84
		9538	9938	1907.6	24.68	19.79
	2	9262	9662	1852.4	25.00	19.99
		9400	9800	1880.0	24.91	19.67
		9538	9938	1907.6	24.54	19.55
	3	9262	9662	1852.4	24.51	19.61
		9400	9800	1880.0	24.52	19.45
		9538	9938	1907.6	24.53	19.69
	4	9262	9662	1852.4	24.58	19.82
		9400	9800	1880.0	24.63	19.05
		9538	9938	1907.6	24.62	19.80

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	24.38	19.85
		1413	1638	1732.6	24.64	19.80
		1513	1738	1752.6	24.67	19.90
	2	1312	1537	1712.4	24.62	19.70
		1413	1638	1732.6	25.20	20.00
		1513	1738	1752.6	24.67	19.88
	3	1312	1537	1712.4	24.34	19.32
		1413	1638	1732.6	25.16	19.47
		1513	1738	1752.6	24.64	19.44
	4	1312	1537	1712.4	24.58	19.38
		1413	1638	1732.6	24.64	19.44
		1513	1738	1752.6	24.77	19.47

7.4. HSPA REL 6 (HSDPA & HSUPA)

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
HSDPA Specific Settings	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
HSUPA Specific Settings	Ahs = β_{hs}/β_c	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

RESULTS

7.4.1. LAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 850MHz (Band 5)	1	4132	4357	826.4	28.50	23.90
		4180	4405	836.0	28.75	23.91
		4230	4455	846.0	28.56	23.85
	2	4132	4357	826.4	28.53	23.30
		4180	4405	836.0	28.55	23.40
		4230	4455	846.0	28.64	23.50
	3	4132	4357	826.4	28.71	23.00
		4180	4405	836.0	28.67	23.20
		4230	4455	846.0	28.36	23.20
	4	4132	4357	826.4	28.25	23.50
		4180	4405	836.0	28.63	23.50
		4230	4455	846.0	28.43	23.40
	5	4132	4357	826.4	28.66	23.82
		4180	4405	836.0	28.34	23.81
		4230	4455	846.0	28.00	23.83

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852.4	28.47	23.70
		9400	9800	1880.0	28.45	23.80
		9538	9938	1907.6	28.43	23.80
	2	9262	9662	1852.4	28.58	23.50
		9400	9800	1880.0	28.76	23.50
		9538	9938	1907.6	28.65	23.40
	3	9262	9662	1852.4	28.51	23.00
		9400	9800	1880.0	28.78	23.30
		9538	9938	1907.6	28.13	23.10
	4	9262	9662	1852.4	28.34	23.50
		9400	9800	1880.0	28.50	23.46
		9538	9938	1907.6	28.62	23.48
	5	9262	9662	1852.4	28.57	23.70
		9400	9800	1880.0	28.80	23.85
		9538	9938	1907.6	28.26	23.80

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1700MHz (Band 4)	1	1312	1537	1712.4	28.80	23.90
		1413	1638	1732.6	28.29	23.81
		1513	1738	1752.6	28.43	23.85
	2	1312	1537	1712.4	28.70	23.50
		1413	1638	1732.6	28.35	23.30
		1513	1738	1752.6	28.31	23.70
	3	1312	1537	1712.4	28.70	22.80
		1413	1638	1732.6	27.45	22.70
		1513	1738	1752.6	28.63	23.00
	4	1312	1537	1712.4	28.46	23.44
		1413	1638	1732.6	28.77	23.43
		1513	1738	1752.6	28.79	23.36
	5	1312	1537	1712.4	28.34	23.68
		1413	1638	1732.6	28.27	23.70
		1513	1738	1752.6	28.46	23.80

7.4.2. UAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 850MHz (Band 5)	1	4132	4357	826.4	28.26	23.46
		4180	4405	836.0	28.70	23.50
		4230	4455	846.0	28.45	23.42
	2	4132	4357	826.4	28.30	23.00
		4180	4405	836.0	28.58	23.10
		4230	4455	846.0	28.40	23.00
	3	4132	4357	826.4	28.48	22.60
		4180	4405	836.0	28.50	22.70
		4230	4455	846.0	28.51	22.40
	4	4132	4357	826.4	28.42	23.01
		4180	4405	836.0	28.49	23.03
		4230	4455	846.0	28.47	23.05
	5	4132	4357	826.4	28.37	23.30
		4180	4405	836.0	28.40	23.40
		4230	4455	846.0	28.42	23.40

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852.4	24.33	19.29
		9400	9800	1880.0	24.25	19.24
		9538	9938	1907.6	24.30	19.27
	2	9262	9662	1852.4	24.30	18.20
		9400	9800	1880.0	24.43	18.10
		9538	9938	1907.6	24.19	18.00
	3	9262	9662	1852.4	24.17	18.80
		9400	9800	1880.0	24.35	18.70
		9538	9938	1907.6	24.24	18.50
	4	9262	9662	1852.4	24.26	18.10
		9400	9800	1880.0	24.35	18.00
		9538	9938	1907.6	24.30	18.30
	5	9262	9662	1852.4	24.47	19.35
		9400	9800	1880.0	24.39	19.28
		9538	9938	1907.6	24.33	19.31

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1700MHz (Band 4)	1	1312	1537	1712.4	24.38	19.80
		1413	1638	1732.6	25.20	19.98
		1513	1738	1752.6	24.60	19.90
	2	1312	1537	1712.4	24.82	19.73
		1413	1638	1732.6	24.95	19.50
		1513	1738	1752.6	24.64	19.89
	3	1312	1537	1712.4	24.10	19.00
		1413	1638	1732.6	24.10	18.90
		1513	1738	1752.6	24.20	19.00
	4	1312	1537	1712.4	24.63	19.61
		1413	1638	1732.6	24.60	19.64
		1513	1738	1752.6	24.87	19.62
	5	1312	1537	1712.4	25.10	19.75
		1413	1638	1732.6	25.00	19.95
		1513	1738	1752.6	25.10	19.87

7.5. DUAL CARRIER HSDPA

DC-HSDPA (Rel 8, CAT 24)

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

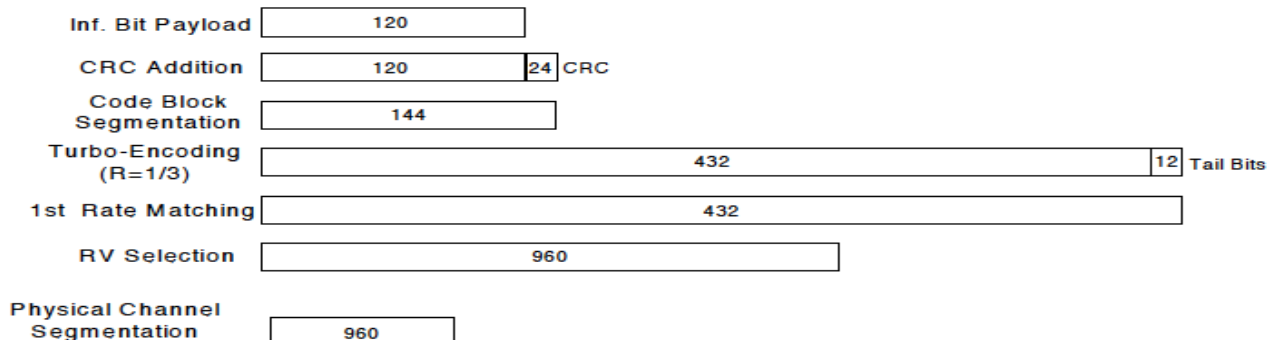


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

RESULT

7.5.1. LAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	28.40	23.64
		4180	4405	836.0	28.45	23.65
		4230	4455	846.0	28.46	23.65
	2	4132	4357	826.4	28.30	23.65
		4180	4405	836.0	28.44	23.65
		4230	4455	846.0	28.50	23.66
	3	4132	4357	826.4	27.98	23.17
		4180	4405	836.0	28.34	23.18
		4230	4455	846.0	28.39	23.16
	4	4132	4357	826.4	28.14	23.15
		4180	4405	836.0	28.23	23.18
		4230	4455	846.0	28.34	23.16

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	27.60	23.79
		9400	9800	1880.0	27.84	23.74
		9538	9938	1907.6	27.90	23.76
	2	9262	9662	1852.4	28.50	23.82
		9400	9800	1880.0	28.08	23.77
		9538	9938	1907.6	28.10	23.75
	3	9262	9662	1852.4	28.24	23.34
		9400	9800	1880.0	27.65	23.27
		9538	9938	1907.6	27.63	23.30
	4	9262	9662	1852.4	28.45	23.33
		9400	9800	1880.0	27.61	23.27
		9538	9938	1907.6	27.80	23.30

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	28.3	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	28.00	23.75
		1413	1638	1732.6	28.10	23.74
		1513	1738	1752.6	28.05	23.75
	2	1312	1537	1712.4	28.40	23.76
		1413	1638	1732.6	28.33	23.74
		1513	1738	1752.6	28.16	23.75
	3	1312	1537	1712.4	28.20	23.30
		1413	1638	1732.6	28.06	23.25
		1513	1738	1752.6	28.07	23.37
	4	1312	1537	1712.4	28.39	23.21
		1413	1638	1732.6	27.91	23.25
		1513	1738	1752.6	28.32	23.48

7.5.2. UAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	27.04	23.15
		4180	4405	836.0	27.38	23.04
		4230	4455	846.0	27.46	22.96
	2	4132	4357	826.4	27.50	23.17
		4180	4405	836.0	27.45	23.05
		4230	4455	846.0	27.06	23.10
	3	4132	4357	826.4	27.06	22.67
		4180	4405	836.0	26.97	22.55
		4230	4455	846.0	27.25	22.61
	4	4132	4357	826.4	27.21	22.68
		4180	4405	836.0	26.85	22.59
		4230	4455	846.0	27.03	22.60

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	23.70	19.54
		9400	9800	1880.0	24.21	19.67
		9538	9938	1907.6	23.87	19.51
	2	9262	9662	1852.4	24.22	19.62
		9400	9800	1880.0	24.14	19.72
		9538	9938	1907.6	23.86	19.54
	3	9262	9662	1852.4	23.52	19.11
		9400	9800	1880.0	23.95	19.20
		9538	9938	1907.6	23.82	19.08
	4	9262	9662	1852.4	23.52	19.08
		9400	9800	1880.0	23.72	19.20
		9538	9938	1907.6	23.66	19.11

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	24.26	20.10
		1413	1638	1732.6	24.07	19.88
		1513	1738	1752.6	24.01	19.98
	2	1312	1537	1712.4	24.11	20.08
		1413	1638	1732.6	24.25	20.00
		1513	1738	1752.6	24.02	19.98
	3	1312	1537	1712.4	23.53	19.63
		1413	1638	1732.6	23.87	19.49
		1513	1738	1752.6	23.78	19.55
	4	1312	1537	1712.4	23.77	19.63
		1413	1638	1732.6	23.94	19.50
		1513	1738	1752.6	23.71	19.54

7.6. CDMA2000 1xRTT

Maximum output power is verified on the Low, Middle and High channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E for 1xRTT, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel. 0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.15.18, L

- Protocol Rev > 6 (IS-2000-0)
- System ID: 7; NID: 65535, Reg. Ch. #: 610 for Cell, 600 for PCS & 450 for AWS
- Radio Config (RC) > RC1 or RC3
- Service Option (SO) Setup > SO55 or SO32
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULT

7.6.1. LAT

1xRTT, BC0, CELL BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.14	24.81	29.67	24.90	28.64	24.40
	55 (Loopback)	29.07	24.80	29.60	24.91	28.63	24.52
RC2	9 (Loopback)	29.08	24.78	29.70	24.92	28.63	24.39
	55 (Loopback)	29.12	24.78	29.61	24.91	28.64	24.40
RC3	2 (Loopback)	28.77	24.78	29.60	24.88	28.57	24.40
	55 (Loopback)	28.94	24.79	29.57	24.87	28.56	24.54
	32 (+ F-SCH)	29.01	24.78	29.60	24.87	28.44	24.44
	32 (+ SCH)	28.80	24.81	29.61	24.88	28.61	24.43
RC4	2 (Loopback)	29.06	24.80	29.56	24.87	28.60	24.40
	55 (Loopback)	28.97	24.80	29.56	24.88	28.55	24.40
	32 (+ F-SCH)	28.96	24.77	29.56	24.87	28.57	24.43
	32 (+ SCH)	29.01	24.79	29.62	24.85	28.58	24.40
RC5	9 (Loopback)	28.99	24.81	29.56	24.86	28.60	24.40
	55 (Loopback)	29.05	24.80	29.32	24.87	28.65	24.41
RC11	2 (Loopback)	28.96	24.86	29.57	24.90	28.60	24.49
	55 (Loopback)	28.98	24.85	29.47	24.89	28.59	24.47
	32 (+ F-SCH)	29.01	24.85	29.57	24.90	28.60	24.47
	32 (+ SCH)	29.04	24.83	29.54	24.91	28.64	24.48

1xRTT, BC1 PCS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.35	24.97	29.60	24.97	29.61	24.91
	55 (Loopback)	29.37	24.96	29.70	24.96	29.66	24.90
RC2	9 (Loopback)	29.36	24.96	29.70	24.97	29.65	24.91
	55 (Loopback)	29.32	24.97	30.00	24.98	29.60	24.91
RC3	2 (Loopback)	29.33	24.95	29.41	24.97	29.58	24.89
	55 (Loopback)	29.23	24.94	29.63	24.96	29.45	24.89
	32 (+ F-SCH)	29.32	24.90	29.57	24.93	29.55	24.87
	32 (+ SCH)	29.33	24.95	29.67	24.97	29.49	24.89
RC4	2 (Loopback)	29.33	24.95	29.66	24.96	29.55	24.87
	55 (Loopback)	29.02	24.94	29.73	24.96	29.56	24.89
	32 (+ F-SCH)	29.32	24.91	29.35	24.95	29.59	24.88
	32 (+ SCH)	29.43	24.92	29.61	24.94	29.47	24.85
RC5	9 (Loopback)	29.34	24.96	29.56	24.95	29.51	24.88
	55 (Loopback)	29.27	24.95	29.74	24.96	29.39	24.87
RC11	2 (Loopback)	29.32	24.97	29.62	24.97	29.47	24.93
	55 (Loopback)	29.33	24.97	29.92	24.97	29.60	24.90
	32 (+ F-SCH)	29.46	24.94	29.68	24.97	29.51	24.90
	32 (+ SCH)	29.30	24.97	29.69	24.97	29.65	24.87

1xRTT, BC15 AWS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1711.25MHz		CH 450 - 1732.5MHz		CH 875 - 1753.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.32	24.90	29.42	24.74	29.49	24.69
	55 (Loopback)	29.32	24.87	29.40	24.75	29.50	24.69
RC2	9 (Loopback)	29.32	24.88	29.45	24.76	29.51	24.70
	55 (Loopback)	29.60	24.95	29.38	24.73	29.48	24.69
RC3	2 (Loopback)	29.20	24.85	29.32	24.71	29.37	24.68
	55 (Loopback)	29.28	24.87	29.28	24.72	29.44	24.65
	32 (+ F-SCH)	29.24	24.85	29.29	24.69	29.40	24.67
	32 (+ SCH)	29.23	24.87	29.31	24.72	29.39	24.66
RC4	2 (Loopback)	29.27	24.87	29.19	24.72	29.37	24.67
	55 (Loopback)	29.24	24.88	29.35	24.71	29.44	24.67
	32 (+ F-SCH)	29.28	24.84	29.35	24.70	29.35	24.68
	32 (+ SCH)	29.19	24.85	29.29	24.68	29.31	24.65
RC5	9 (Loopback)	29.27	24.86	29.33	24.72	29.17	24.68
	55 (Loopback)	29.24	24.86	29.28	24.71	29.25	24.66
RC11	2 (Loopback)	29.25	24.88	29.27	24.75	29.39	24.70
	55 (Loopback)	29.26	24.89	29.22	24.75	29.37	24.71
	32 (+ F-SCH)	29.24	24.87	29.31	24.75	29.30	24.69
	32 (+ SCH)	29.25	24.87	29.24	24.75	29.37	24.70

1xRTT, BC10 SECONDARY 800

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.40	24.96	29.39	24.95	29.61	24.99
	55 (Loopback)	29.41	24.95	29.39	24.93	29.60	24.99
RC2	9 (Loopback)	29.39	24.97	29.39	24.93	29.60	24.99
	55 (Loopback)	29.43	24.96	29.40	24.94	29.62	25.00
RC3	2 (Loopback)	29.35	24.92	29.28	24.91	29.43	24.96
	55 (Loopback)	29.33	24.94	29.31	24.91	29.56	24.99
	32 (+ F-SCH)	29.28	24.87	29.33	24.89	29.49	24.98
	32 (+ SCH)	29.36	24.92	29.36	24.89	29.42	24.96
RC4	2 (Loopback)	29.32	24.93	29.24	24.91	29.54	24.96
	55 (Loopback)	29.28	24.92	29.31	24.91	29.45	24.97
	32 (+ F-SCH)	29.25	24.88	29.31	24.87	29.48	24.98
	32 (+ SCH)	29.31	24.91	29.32	24.88	29.59	24.96
RC5	9 (Loopback)	29.37	24.95	29.33	24.92	29.50	24.97
	55 (Loopback)	29.36	24.94	29.33	24.91	29.47	24.96
RC11	2 (Loopback)	29.27	24.96	29.29	24.96	29.44	24.98
	55 (Loopback)	29.36	24.96	29.39	24.95	29.56	24.98
	32 (+ F-SCH)	29.37	24.95	29.42	24.93	29.60	24.97
	32 (+ SCH)	29.38	24.92	29.39	24.91	29.45	24.96

7.6.2. UAT

1xRTT, BC0 CELL BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	28.81	24.50	29.00	24.50	28.88	24.23
	55 (Loopback)	29.17	24.52	29.37	24.50	28.84	24.40
RC2	9 (Loopback)	29.21	24.49	29.28	24.47	28.86	24.12
	55 (Loopback)	29.20	24.49	29.28	24.50	28.86	24.18
RC3	2 (Loopback)	29.02	24.48	29.15	24.50	28.84	24.15
	55 (Loopback)	28.99	24.46	29.23	24.50	28.96	24.38
	32 (+ F-SCH)	28.97	24.41	29.27	24.35	28.89	24.39
	32 (+ SCH)	28.81	24.38	29.26	24.36	28.75	24.17
RC4	2 (Loopback)	28.96	24.45	29.07	24.45	28.89	24.17
	55 (Loopback)	28.88	24.46	29.21	24.49	28.84	24.15
	32 (+ F-SCH)	28.97	24.41	29.12	24.35	28.88	24.15
	32 (+ SCH)	28.84	24.38	29.19	24.38	28.83	24.16
RC5	9 (Loopback)	28.99	24.49	29.19	24.46	28.80	24.16
	55 (Loopback)	29.05	24.48	29.18	24.49	28.81	24.16
RC11	2 (Loopback)	28.84	24.49	29.07	24.50	28.87	24.22
	75 (Loopback)	29.05	24.49	29.23	24.50	28.85	24.21
	32 (+ F-SCH)	28.99	24.50	29.14	24.48	28.84	24.11
	32 (+ SCH)	29.16	24.50	29.19	24.40	28.92	24.16

1xRTT, BC1 PCS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	25.88	20.88	26.00	20.93	25.41	20.87
	55 (Loopback)	26.20	21.00	25.94	20.90	25.43	20.94
RC2	9 (Loopback)	25.53	20.90	26.01	20.97	25.44	20.94
	55 (Loopback)	25.51	20.89	26.01	20.95	25.42	20.92
RC3	2 (Loopback)	25.41	20.90	26.02	20.91	25.36	20.90
	55 (Loopback)	25.51	20.89	25.93	20.90	25.26	20.89
	32 (+ F-SCH)	25.53	20.97	25.91	20.96	25.33	20.82
	32 (+ SCH)	25.65	20.90	25.92	20.94	25.57	20.82
RC4	2 (Loopback)	25.48	20.91	26.02	20.98	25.32	20.88
	55 (Loopback)	25.54	20.93	25.90	20.92	25.34	20.90
	32 (+ F-SCH)	25.65	20.94	26.00	20.92	25.41	20.83
	32 (+ SCH)	25.72	20.99	25.93	20.88	25.49	20.81
RC5	9 (Loopback)	25.42	20.89	25.89	20.93	25.38	20.88
	55 (Loopback)	25.42	20.92	25.95	20.93	25.45	20.93
RC11	2 (Loopback)	25.53	20.89	25.96	20.93	25.39	20.94
	75 (Loopback)	25.46	20.90	25.88	20.93	25.41	20.91
	32 (+ F-SCH)	25.55	20.88	25.86	20.92	25.33	20.83
	32 (+ SCH)	25.49	20.89	25.92	20.94	25.35	20.79

1xRTT, BC15 AWS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1711.25MHz		CH 450 - 1732.5MHz		CH 875 - 1753.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	26.77	21.13	26.70	21.14	26.80	21.09
	55 (Loopback)	26.33	21.14	26.63	21.16	26.73	21.14
RC2	9 (Loopback)	26.25	21.15	26.89	21.17	26.74	21.15
	55 (Loopback)	26.90	21.20	26.50	21.11	26.59	21.12
RC3	2 (Loopback)	26.02	21.14	26.40	21.12	25.96	21.11
	55 (Loopback)	25.79	21.13	26.43	21.10	26.03	21.09
	32 (+ F-SCH)	26.27	21.17	26.22	21.19	25.94	21.09
	32 (+ SCH)	26.19	21.10	26.16	21.17	26.27	21.14
RC4	2 (Loopback)	26.13	21.13	26.34	21.17	26.08	21.09
	55 (Loopback)	25.97	21.16	26.45	21.13	26.06	21.11
	32 (+ F-SCH)	26.08	21.10	26.23	21.16	26.11	21.13
	32 (+ SCH)	26.23	21.10	26.27	21.13	26.20	21.13
RC5	9 (Loopback)	26.12	21.12	26.23	21.14	26.22	21.09
	55 (Loopback)	26.06	21.12	26.19	21.12	26.19	21.12
RC11	2 (Loopback)	26.31	21.17	26.37	21.15	26.34	21.13
	75 (Loopback)	25.99	21.19	26.21	21.16	26.06	21.10
	32 (+ F-SCH)	26.14	21.16	26.10	21.15	26.09	21.12
	32 (+ SCH)	26.08	21.15	26.48	21.19	25.95	21.09

1xRTT, BC10 SECONDARY 800

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.20	24.29	29.56	24.33	29.14	24.27
	55 (Loopback)	29.22	24.27	29.60	24.36	29.07	24.32
RC2	9 (Loopback)	29.20	24.30	29.27	24.30	29.07	24.35
	55 (Loopback)	29.16	24.27	29.27	24.35	29.11	24.31
RC3	2 (Loopback)	29.01	24.30	29.19	24.31	28.02	24.30
	55 (Loopback)	29.05	24.29	29.13	24.31	28.59	24.27
	32 (+ F-SCH)	29.01	24.30	29.10	24.34	28.68	24.26
	32 (+ SCH)	29.25	24.35	29.03	24.33	28.91	24.27
RC4	2 (Loopback)	29.09	24.29	29.14	24.20	28.49	24.29
	55 (Loopback)	29.13	24.31	29.06	24.32	28.57	24.31
	32 (+ F-SCH)	29.24	24.30	29.10	24.33	28.73	24.27
	32 (+ SCH)	29.22	24.35	29.09	24.33	28.61	24.29
RC5	9 (Loopback)	29.03	24.27	29.05	24.35	28.60	24.29
	55 (Loopback)	29.03	24.26	29.17	24.30	28.91	24.31
RC11	2 (Loopback)	29.15	24.29	29.09	24.35	28.84	24.32
	75 (Loopback)	28.93	24.31	29.05	24.35	28.75	24.33
	32 (+ F-SCH)	29.06	24.29	28.97	24.34	28.67	24.32
	32 (+ SCH)	28.99	24.28	28.99	24.30	28.56	24.25

7.7. CDMA2000 1xEV-DO - Release 0 (Rel. 0)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

7.7.1. LAT

CDMA2000 EVDO REV. 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	1013	824.70	29.05	24.87
		384	836.52	29.21	24.90
		777	848.31	28.66	24.70

CDMA2000 EVDO REV. 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1851.25	29.21	24.55
		600	1880.00	29.78	24.57
		1175	1908.75	29.32	24.56

CDMA2000 EVDO REV. 0 1700MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1711.25	29.55	24.73
		450	1732.50	29.94	24.89
		875	1753.75	29.97	24.75

CDMA2000 EVDO REV. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	29.29	24.80
		560	820.00	29.40	24.80
		670	822.75	29.45	24.90

7.7.2. UAT

CDMA2000 EVDO REV. 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	1013	824.70	28.95	24.35
		384	836.52	29.00	24.40
		777	848.31	29.25	24.50

CDMA2000 EVDO REV. 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1851.25	25.71	20.80
		600	1880.00	26.14	20.90
		1175	1908.75	25.84	20.70

CDMA2000 EVDO REV. 0 1700MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1711.25	26.23	21.03
		450	1732.50	27.54	21.18
		875	1753.75	27.38	21.16

CDMA2000 EVDO REV. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	29.40	24.40
		560	820.00	29.50	24.50
		670	822.75	29.30	24.40

7.8. CDMA2000 1xEV-DO - Revision A (Rev. A)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
- > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
- > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

7.8.1. LAT

CDMA2000 EVDO REV A 850MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	1013	824.70	28.99	24.93
		384	836.52	29.32	25.00
		777	848.31	28.38	24.28

CDMA2000 EVDO REV A 1900MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	29.16	24.86
		600	1880.00	29.79	24.85
		1175	1908.75	29.29	24.83

CDMA2000 EVDO REV A 1700MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1711.25	29.30	25.00
		450	1732.50	30.12	24.92
		875	1753.75	30.15	24.77

CDMA2000 EVDO REV A 800MHz SECONDARY BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	450	817.25	29.21	24.78
		560	820.00	29.22	24.89
		670	822.75	29.46	24.92

7.8.2. UAT

CDMA2000 EVDO REV A 850MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	1013	824.70	29.12	24.45
		384	836.52	29.30	24.60
		777	848.31	28.79	24.50

CDMA2000 EVDO REV A 1900MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	26.62	20.99
		600	1880.00	27.00	20.92
		1175	1908.75	26.54	21.00

CDMA2000 EVDO REV A 1700MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1711.25	27.00	20.97
		450	1732.50	27.41	21.04
		875	1753.75	27.24	21.20

CDMA2000 EVDO REV A 800MHz SECONDARY BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	450	817.25	29.60	24.52
		560	820.00	29.44	24.49
		670	822.75	29.50	24.48

7.9. CDMA2000 1xEV-DO - Revision B (Rev. B)

This procedure assumes the Rohde & Schwarz CMW 500 CDMA Rev. B Test Set has the following applications installed and with valid license.

Application Rev. License
1xEV-DO Terminal Test V.2.1.25

1xEV-DO Release B –

- CMW 500 Signal Generator > 1xEV-DO Taskbar Enable
- CMW 500 1xEV-DO Signaling Configuration Window >
- 1xEV-DO Signaling On Window:
Under Access Network Control:
Band Class: BC0: US Cellular
RF Channel: 31
1xEV-DP Power: -70dBm
Release B

- 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

➤ Under Carrier Configuration: RF Frequency

For Two Carriers: Low Channel (1013)

	RF Channel	RF Channel Offset
Carrier [0]	31	0
Carrier [1]	1013	982

➤ Under Carrier Configuration: RF Pilot

	Carrier Sector	Active on AN	Assigned to AT
Pilot [0]	C0/S0	✓	✓
	CA/S1	✓	✓

For Three Carriers: Low Channel (1013)

	RF Channel	RF Channel Offset
Carrier [0]	72	0
Carrier [1]	31	-41
Carrier [2]	1013	941

➤ Under Carrier Configuration: RF Pilot

	Carrier Sector	Active on AN	Assigned to AT
Pilot [0]	C0/S0	✓	✓
Pilot [1]	C1/S1	✓	✓
Pilot [2]	C2/S2	✓	✓

- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

7.9.1. LAT

CDMA2000 EVDO REV B 850MHz BAND 2 CARRIER MIN

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	EVDO	1013+31	824.70+825.93	28.60	21.52
		384+425	836.52+837.75	28.80	21.90
		736+777	847.08+848.31	28.28	21.71

CDMA2000 EVDO REV B 850MHz BAND 2 CARRIER MAX

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	EVDO	1013+156	824.70+829.68	26.45	21.59
		384+550	836.52+841.50	26.42	21.66
		611+777	843.33+848.31	26.87	21.65

CDMA2000 EVDO REV B 850MHz BAND 3 CARRIER MIN

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	EVDO	1013+31+72	824.70+825.93+827.16	27.97	21.71
		384+425+466	836.52+837.75+838.98	28.20	21.75
		695+736+777	845.85+847.08+848.31	27.67	21.79

7.9.2. UAT

CDMA2000 EVDO REV B 850MHz BAND 2 CARRIER MIN

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	EVDO	1013+31	824.70+825.93	27.90	21.24
		384+425	836.52+837.75	28.00	21.30
		736+777	847.08+848.31	27.97	20.96

CDMA2000 EVDO REV B 850MHz BAND 2 CARRIER MAX

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	EVDO	1013+156	824.70+829.68	27.10	21.14
		384+550	836.52+841.50	27.20	21.25
		611+777	843.33+848.31	26.90	20.56

CDMA2000 EVDO REV B 850MHz BAND 3 CARRIER MIN

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	EVDO	1013+31+72	824.70+825.93+827.16	27.35	21.23
		384+425+466	836.52+837.75+838.98	27.43	21.26
		695+736+777	845.85+847.08+848.31	27.34	20.98

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- GPRS and EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, BC0, BC1, BC10 and BC15

RESULTS

GPRS MODE

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
CELL	GPRS	128	824.2	243.8901	314.416
		190	836.6	248.2233	309.705
		251	848.8	248.3068	333.454

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
PCS	GPRS	512	1850.2	241.1351	313.230
		661	1880.0	246.7532	310.382
		810	1909.8	245.7807	308.993

EGPRS MODE

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (KHz)
CELL	EGPRS	128	824.2	251.5722	313.552
		190	836.6	256.2667	309.432
		251	848.8	252.3536	308.177

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (KHz)
PCS	EGPRS	512	1850.2	247.9042	322.574
		661	1880.0	256.5746	319.074
		810	1909.8	257.0551	318.439

WCDMA PART 22, 24, AND 27

Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
850MHz	UMTS Rel. 99	4357	826.40	4.1792	4.594
		4408	836.00	4.1931	4.584
		4458	846.60	4.2457	4.625
1900MHz		9662	1852.40	4.2111	4.545
		9800	1880.00	4.1633	4.603
		9938	1907.60	4.0957	4.577
1700MHz		1537	1712.40	4.1189	4.642
		1638	1732.00	4.1726	4.573
		1738	1752.60	4.2114	4.622

WCDMA PART 22, 24, AND 27

Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
850MHz	UMTS HSDPA	4357	826.40	4.1574	4.6660
		4408	836.00	4.1595	4.5340
		4458	846.60	4.3004	4.6080
1900MHz		9662	1852.40	4.2104	4.6870
		9800	1880.00	4.2447	4.6190
		9938	1907.60	4.0704	4.5600
1700MHz		1537	1712.40	4.1145	4.6130
		1638	1732.00	4.1755	4.5490
		1738	1752.60	4.1404	4.5890

CDMA2000 PART 22, 24, 27 AND 90

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 1xRTT	1013	824.70	1.2680	1.4170
		384	836.52	1.2441	1.3830
		777	848.31	1.2602	1.3800
PCS		25	1851.25	1.2482	1.4140
		600	1880.00	1.2501	1.4040
		1175	1908.75	1.2642	1.3870
AWS		25	1711.25	1.2757	1.3960
		450	1732.50	1.2813	1.3980
		875	1753.75	1.2673	1.3730
800 MHz Secondary		476	817.90	1.2569	1.4030
		580	820.50	1.2522	1.3580
		684	823.10	1.2771	1.4010

CDMA2000 PART 22, 24, 27 AND 90



Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 EVDO Rev. A	1013	824.70	1.2686	1.4100
		384	836.52	1.2506	1.3910
		777	848.31	1.2783	1.3720
PCS		25	1851.25	1.2601	1.3880
		600	1880.00	1.2594	1.4020
		1175	1908.75	1.2806	1.4140
AWS		25	1711.25	1.2803	1.4260
		450	1732.50	1.2706	1.3890
		875	1753.75	1.2621	1.3990
800 MHz Secondary		476	817.90	1.2666	1.3790
		580	820.50	1.2762	1.4060
		684	823.10	1.2511	1.3900


CDMA2000 REV B, PART 22

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 EVDO Rev. B	1013+31	824.70+825.93	2.4190	2.6170
		384+425	836.52+837.75	2.4601	2.6030
		736+777	847.08+848.31	2.4340	2.6370
		1013+156	824.70+829.68	6.3492	6.5980
		384+550	836.52+841.50	6.3270	6.6800
		611+777	843.33+848.31	6.3074	6.5700
		1013+31+72	824.70+825.93+827.16	3.6578	4.6820
		384+425+466	836.52+837.75+838.98	3.7002	3.9240
		695+736+777	845.85+847.08+848.31	3.6697	5.5520


8.1.1. GSM-GPRS



850MHz BAND

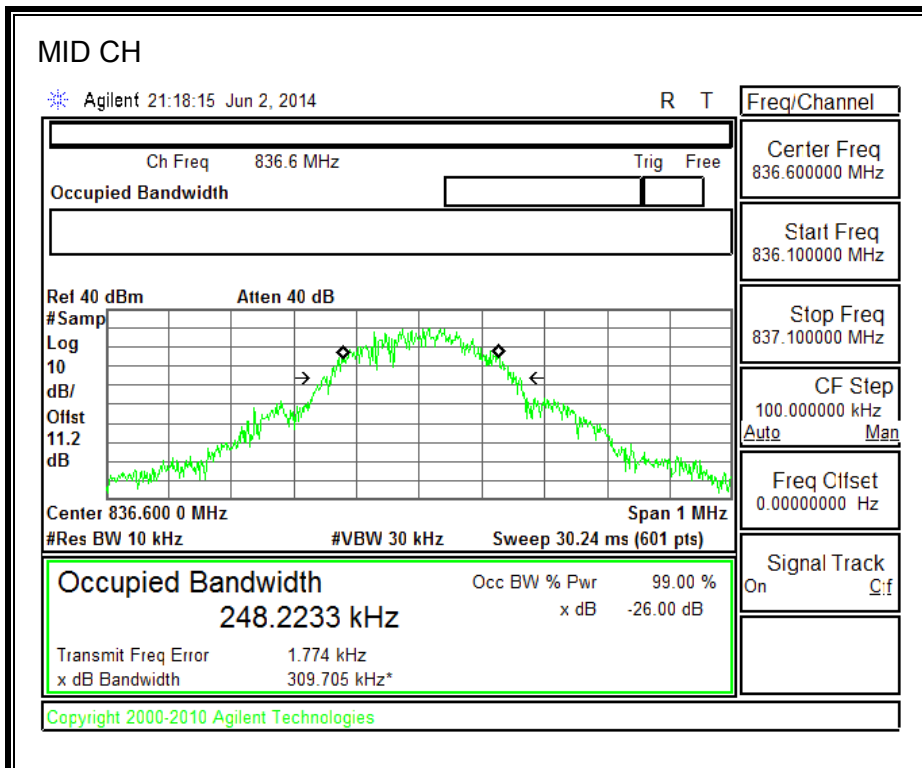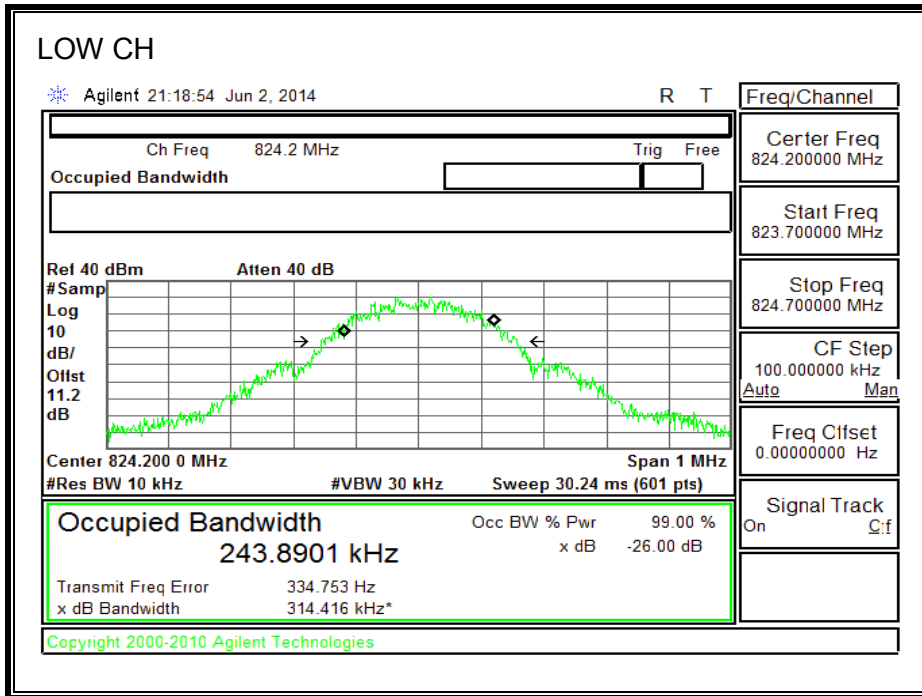

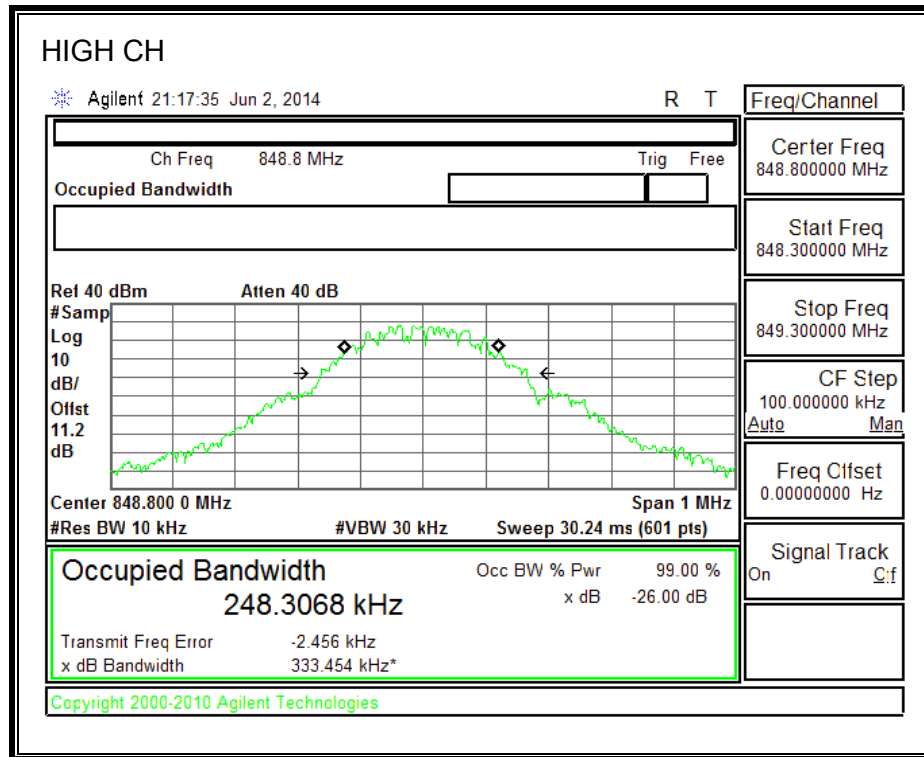



1900MHz BAND

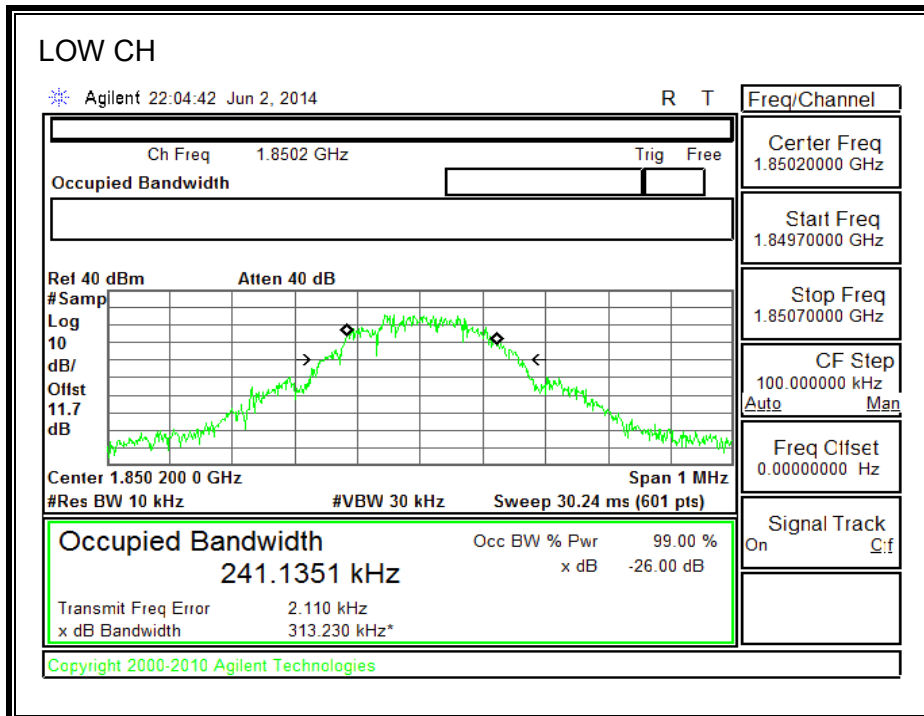


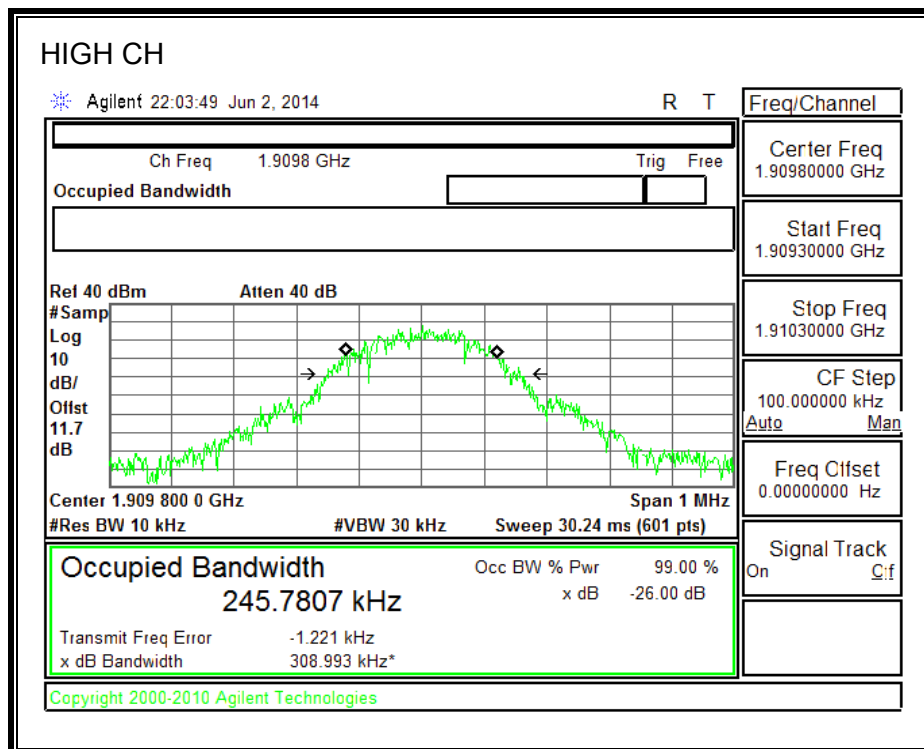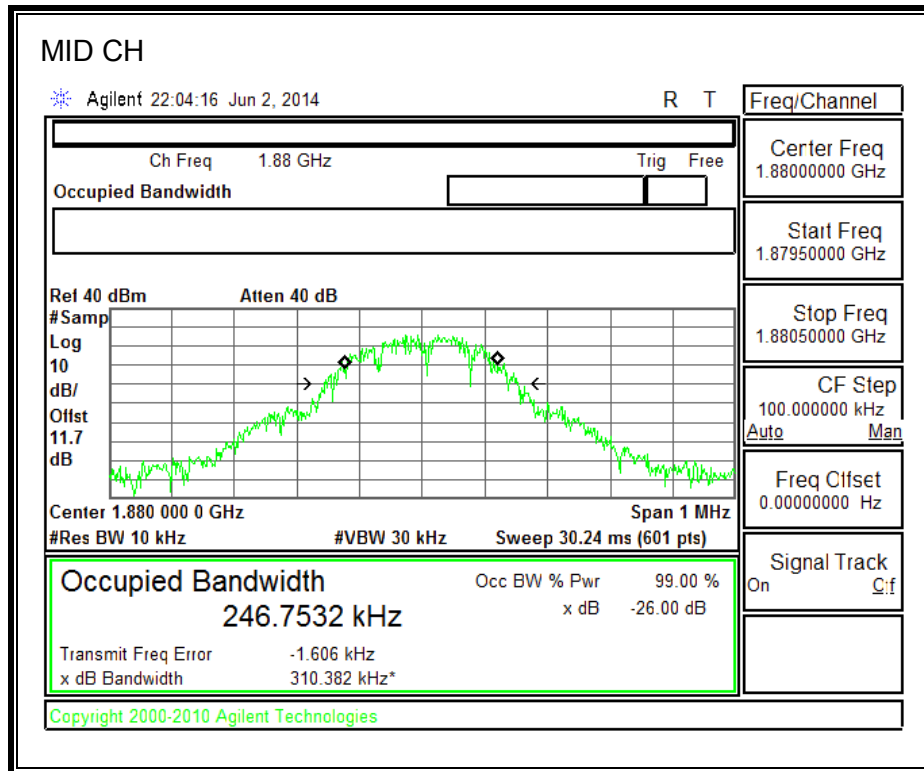


8.1.2. GSM-EGPRS



850MHz BAND

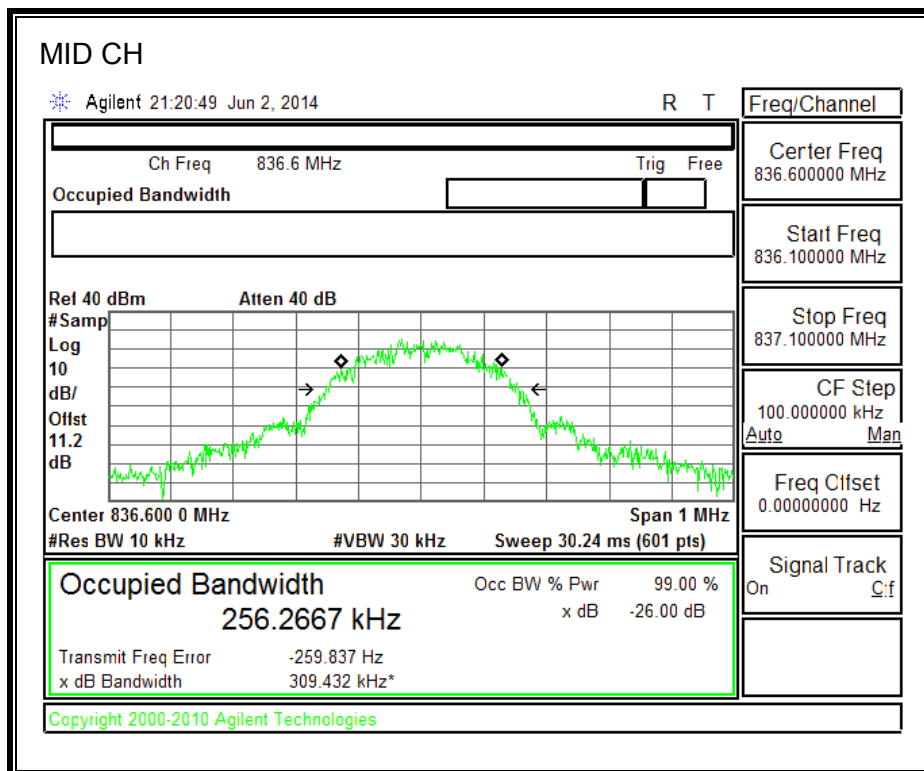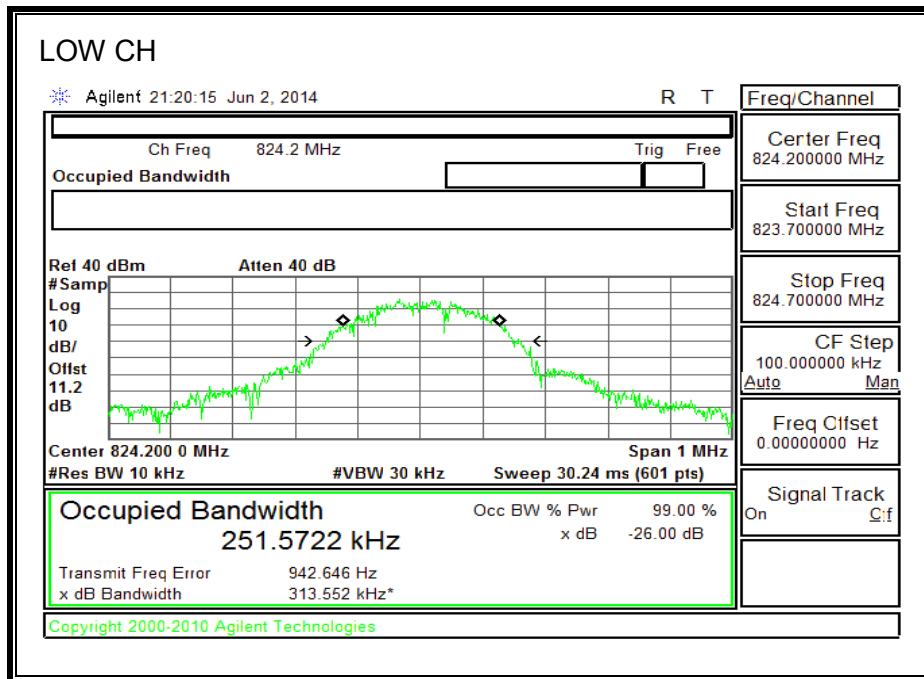

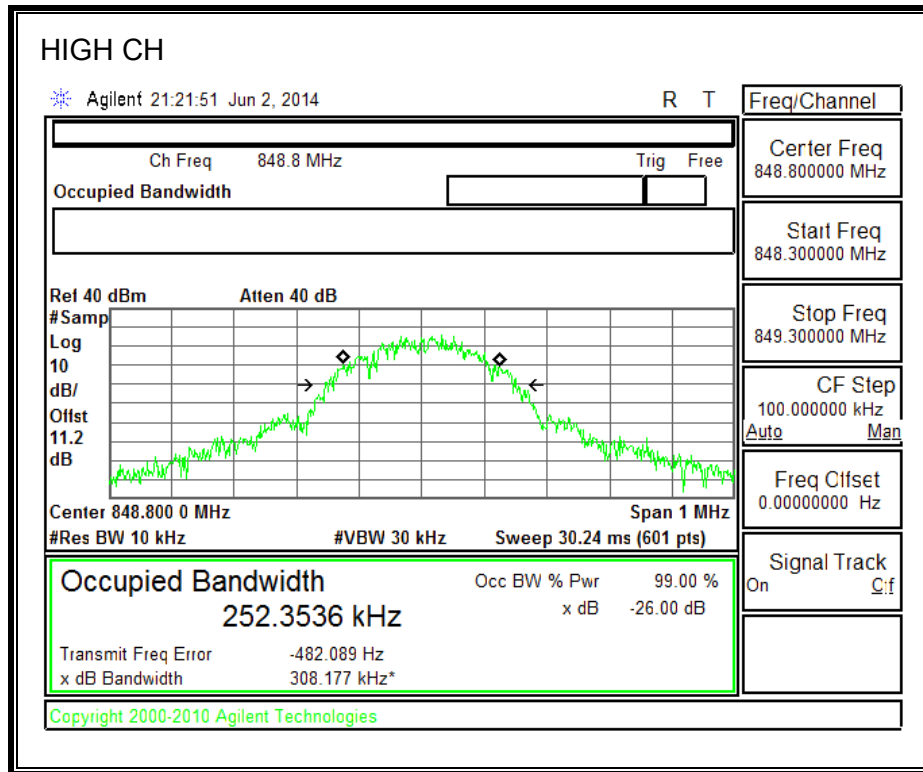



1900MHz BAND

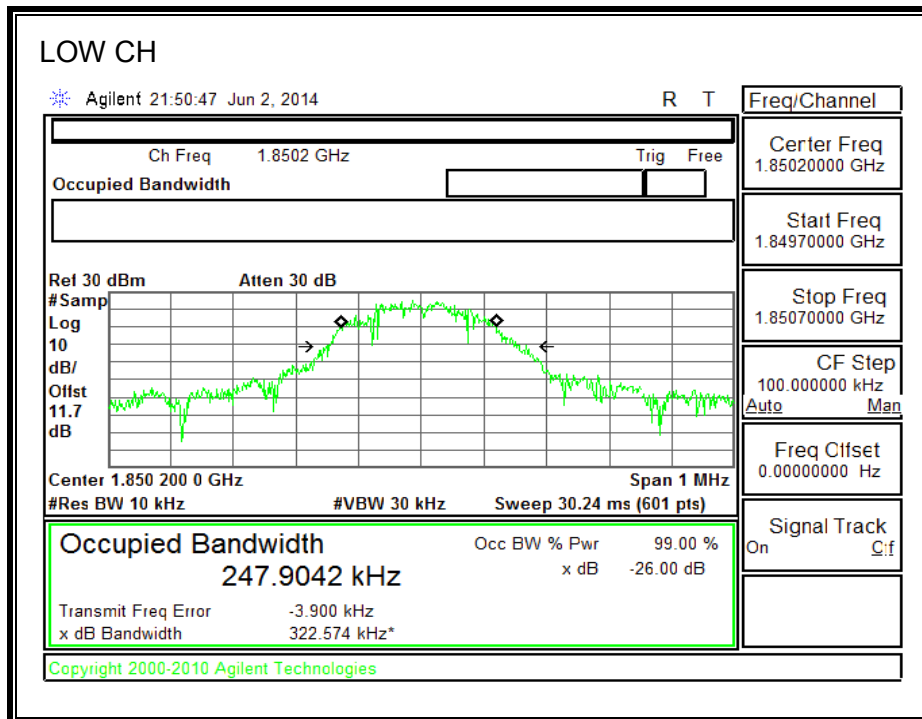


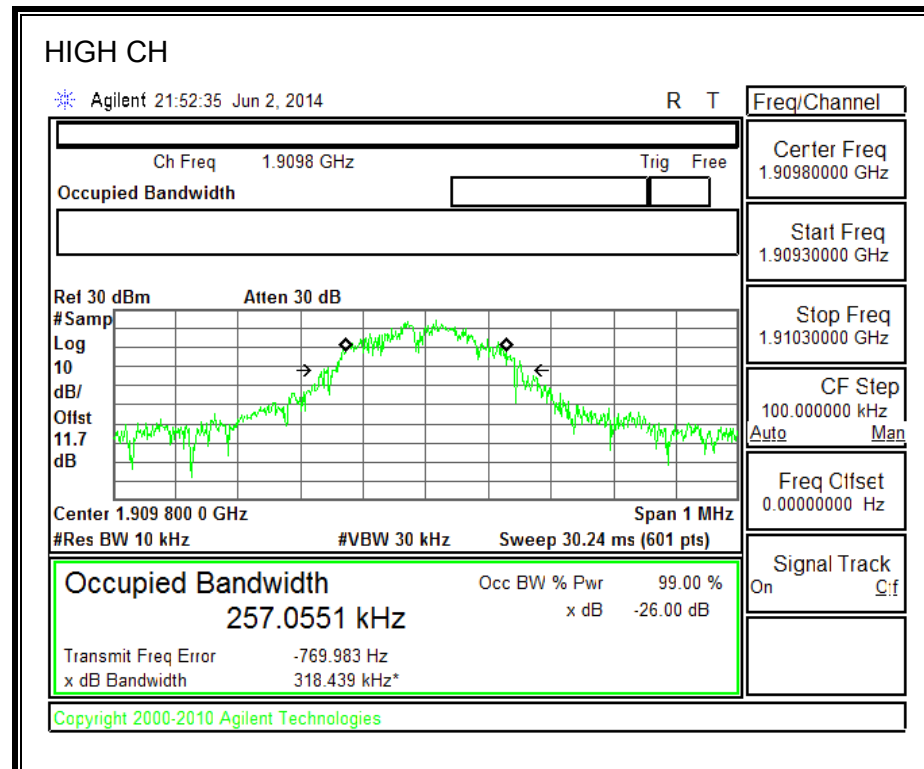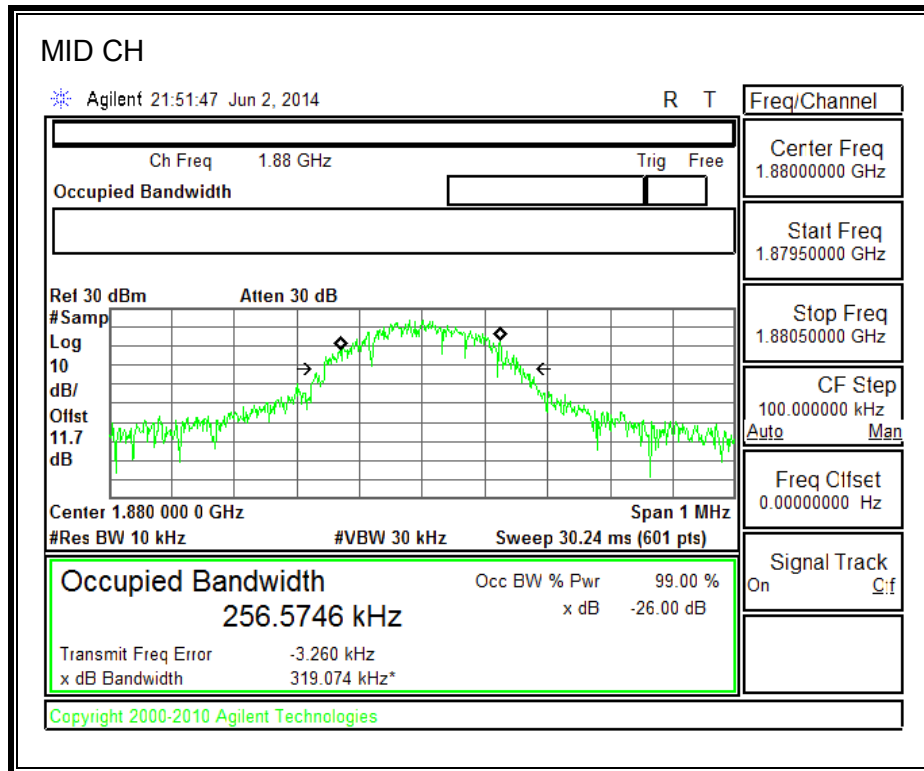


8.1.3. UMTS Rel. 99



850MHz BAND

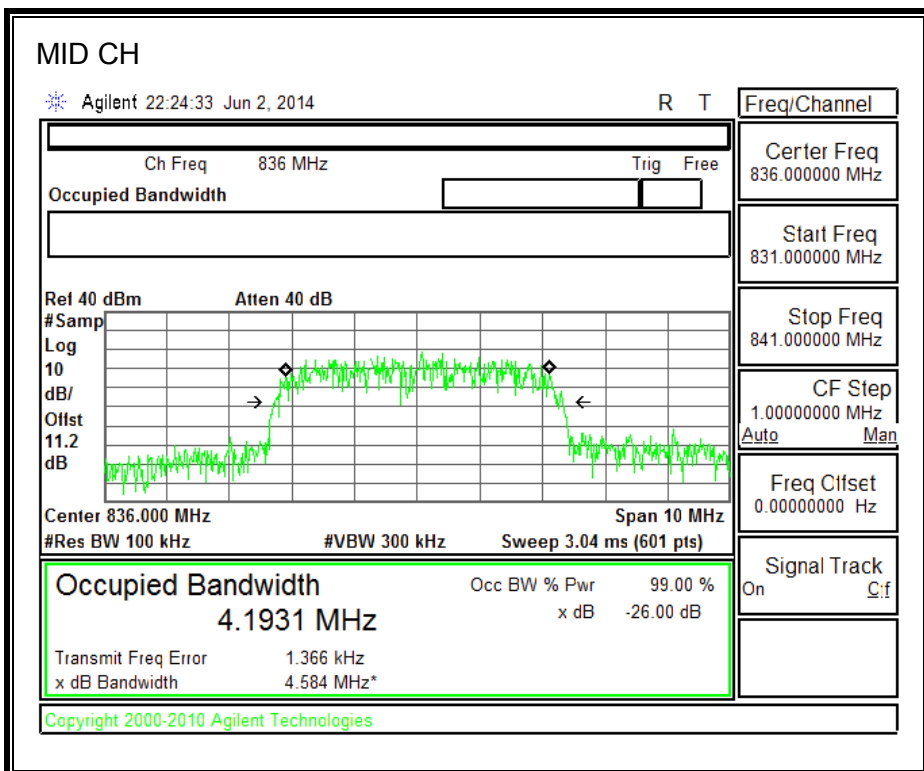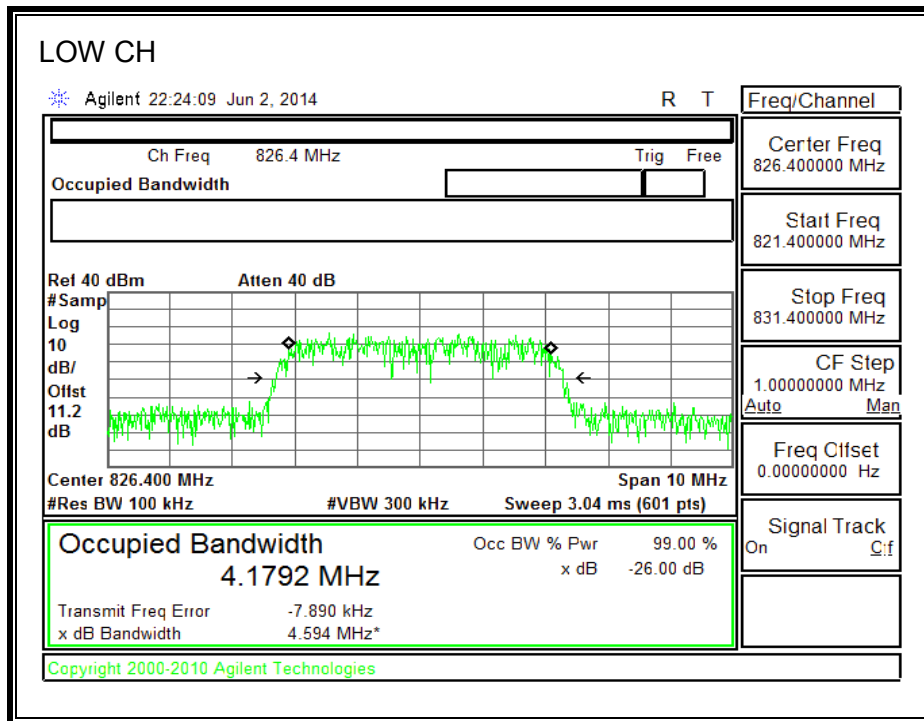


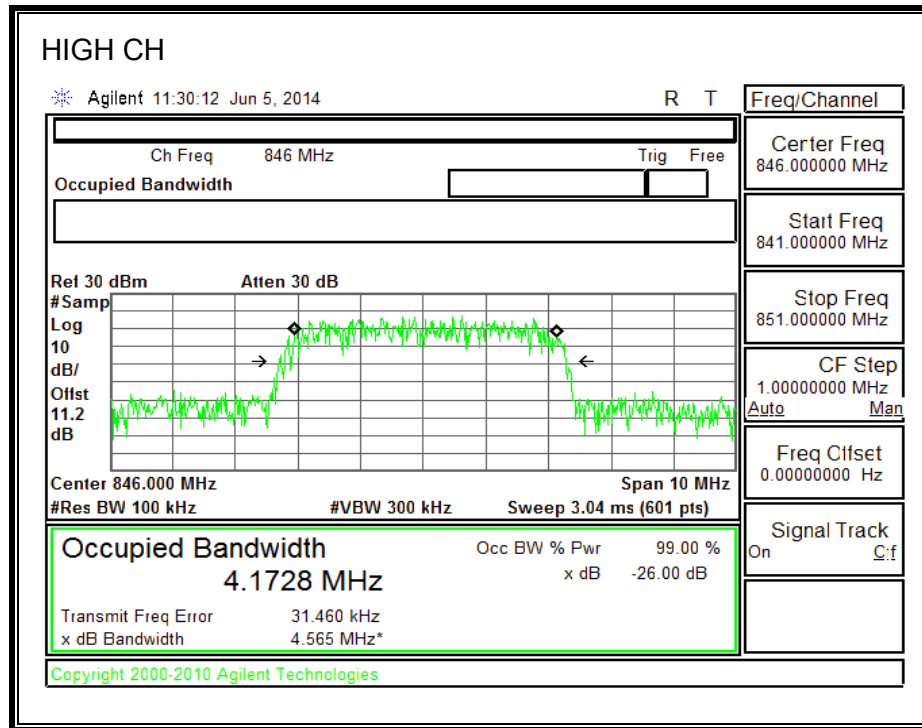



1900MHz BAND

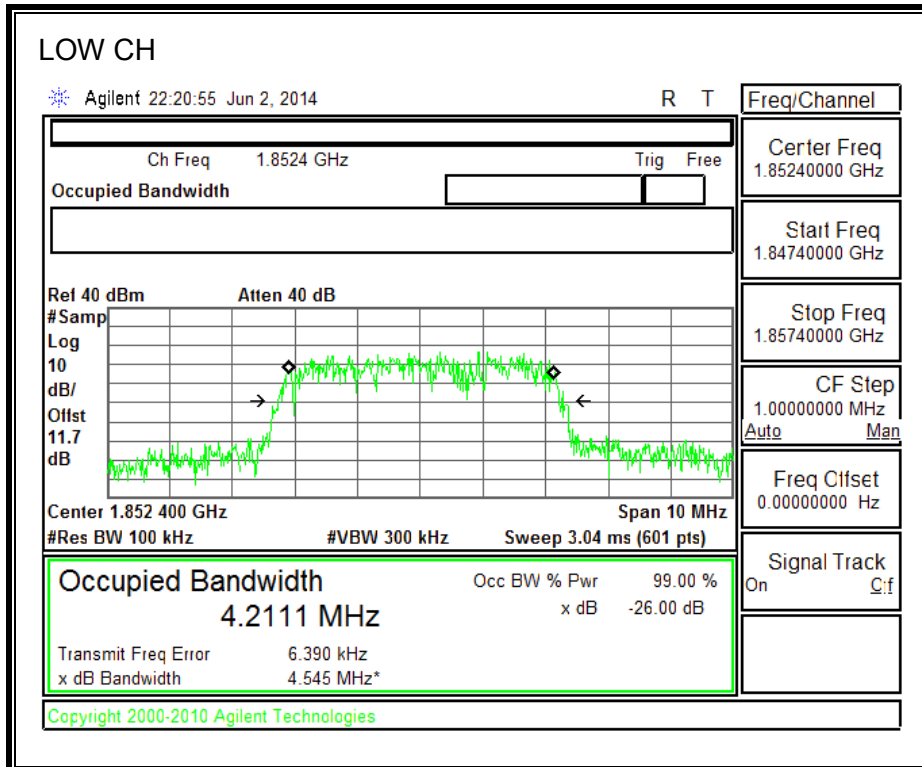

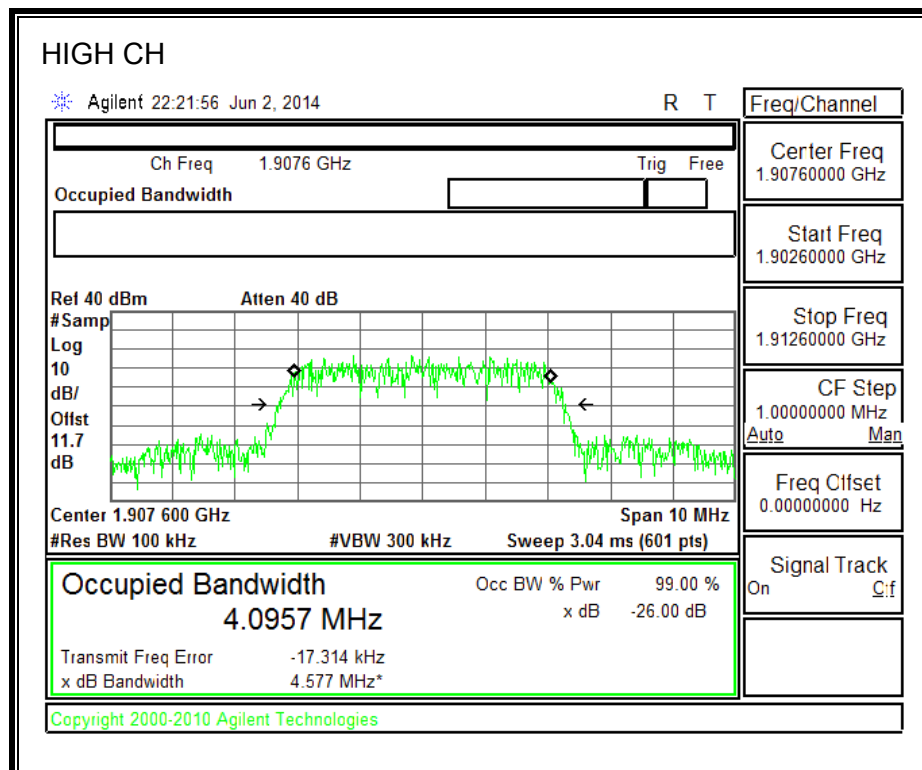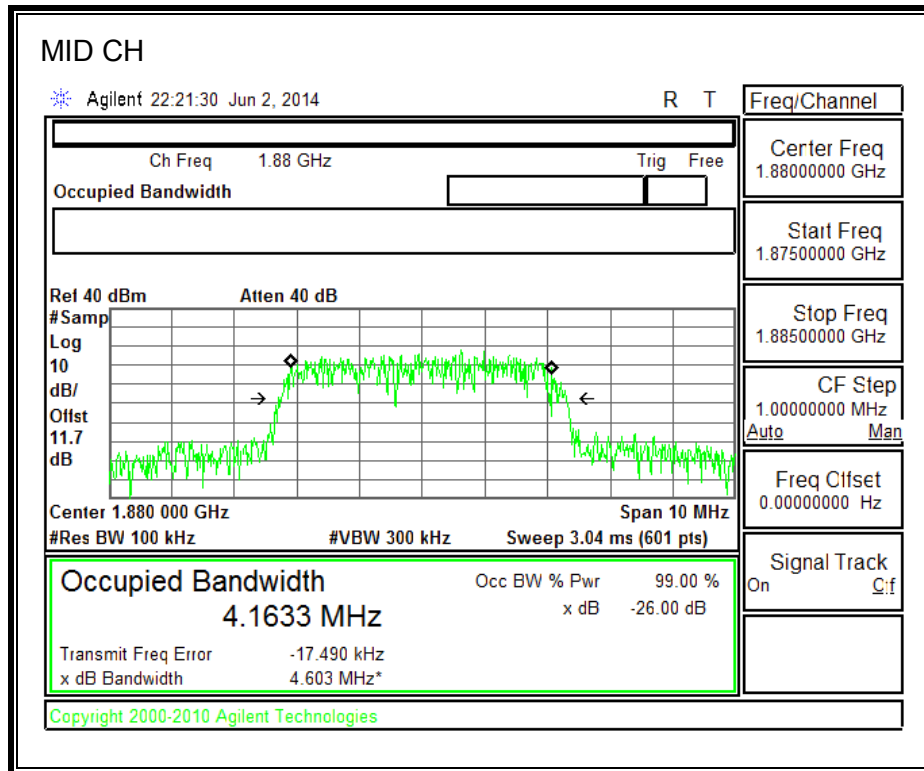



1700MHz BAND

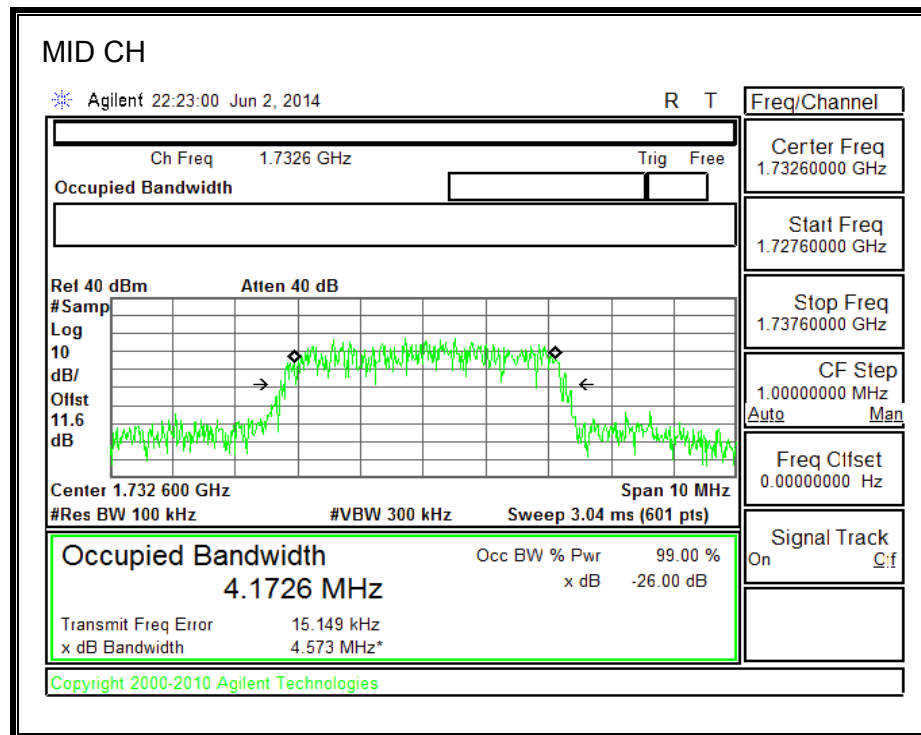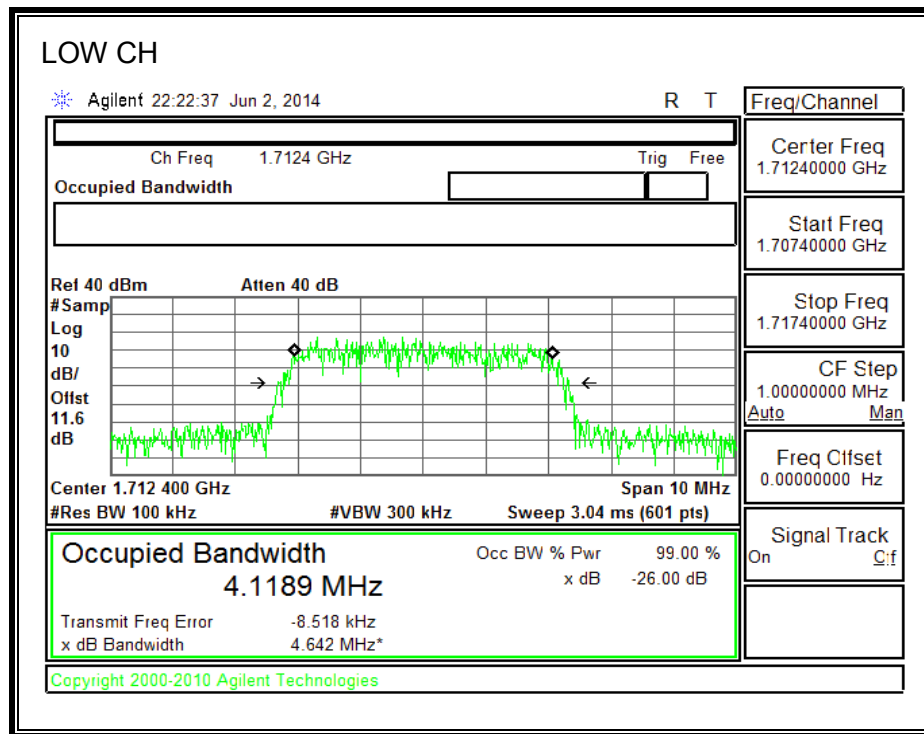


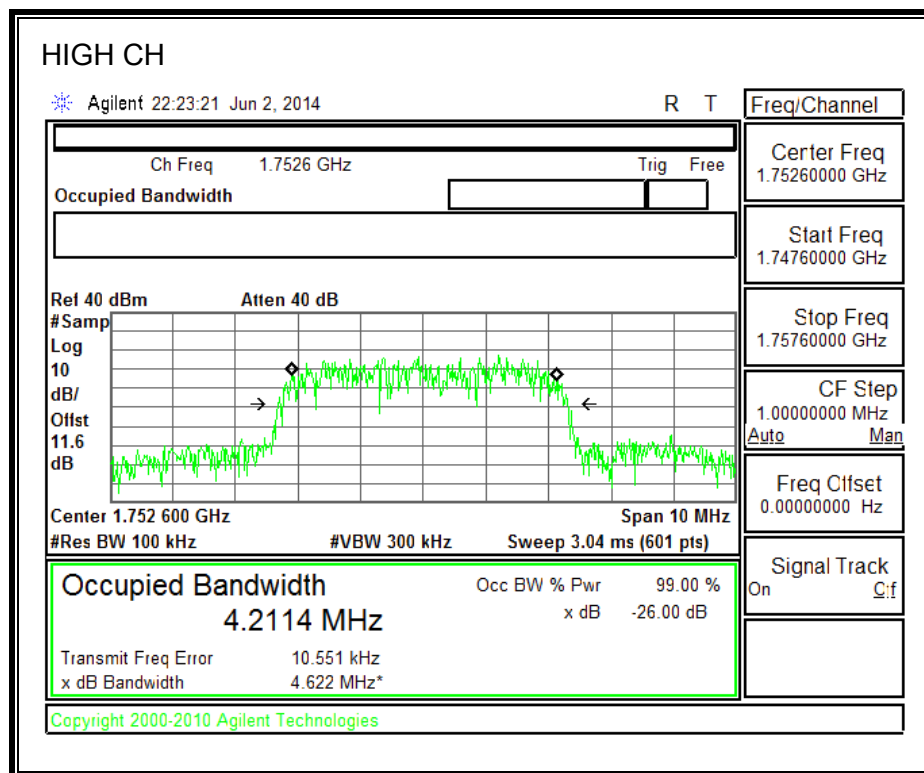


8.1.4. UMTS HSDPA



850MHz BAND

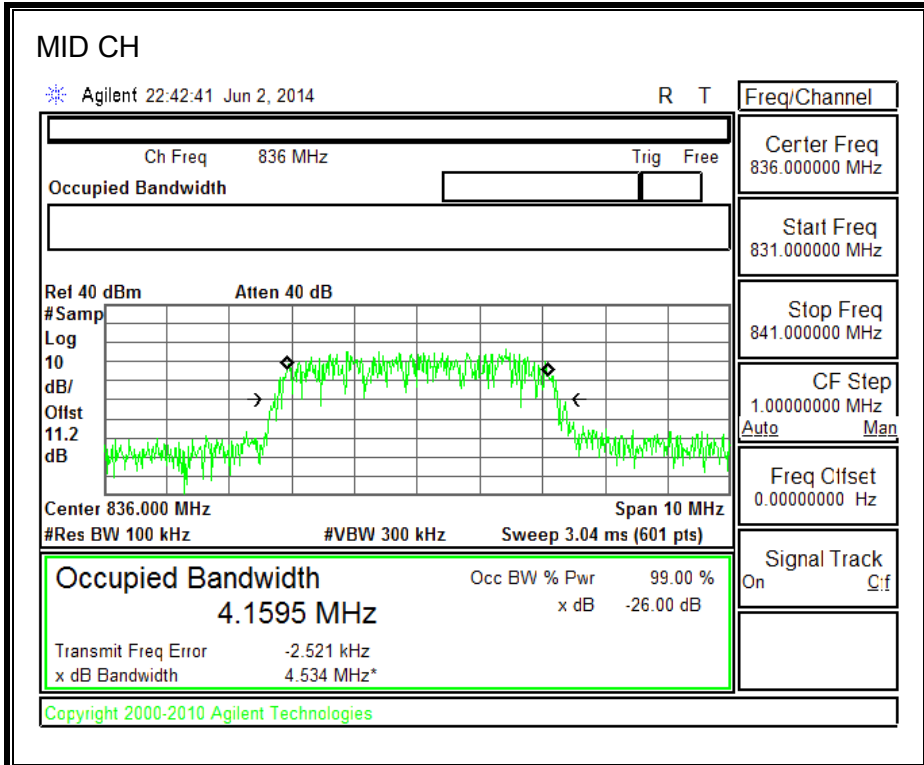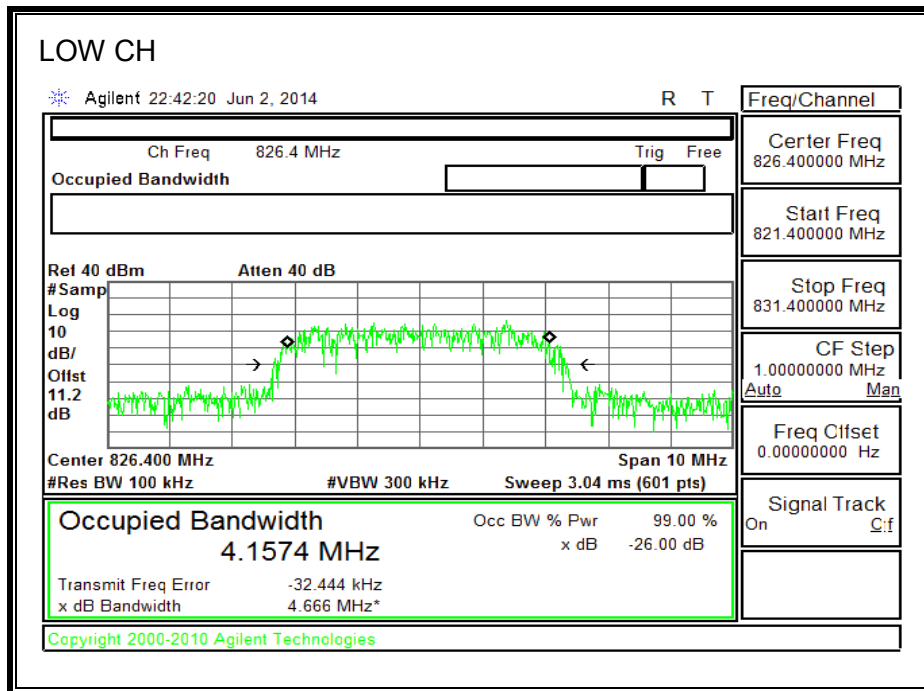


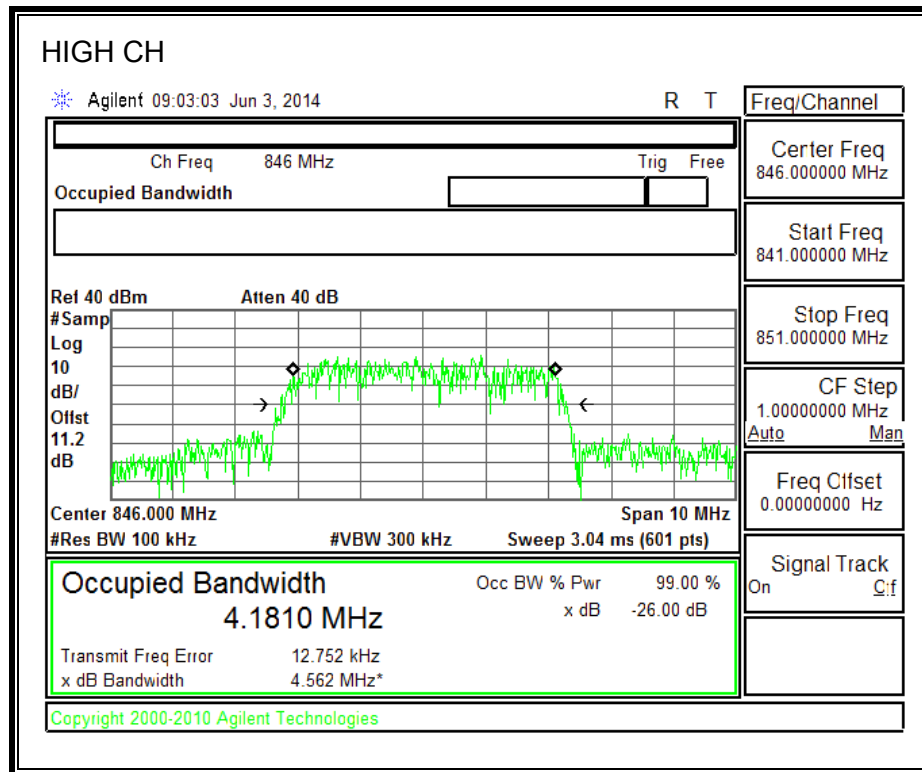



1900MHz BAND

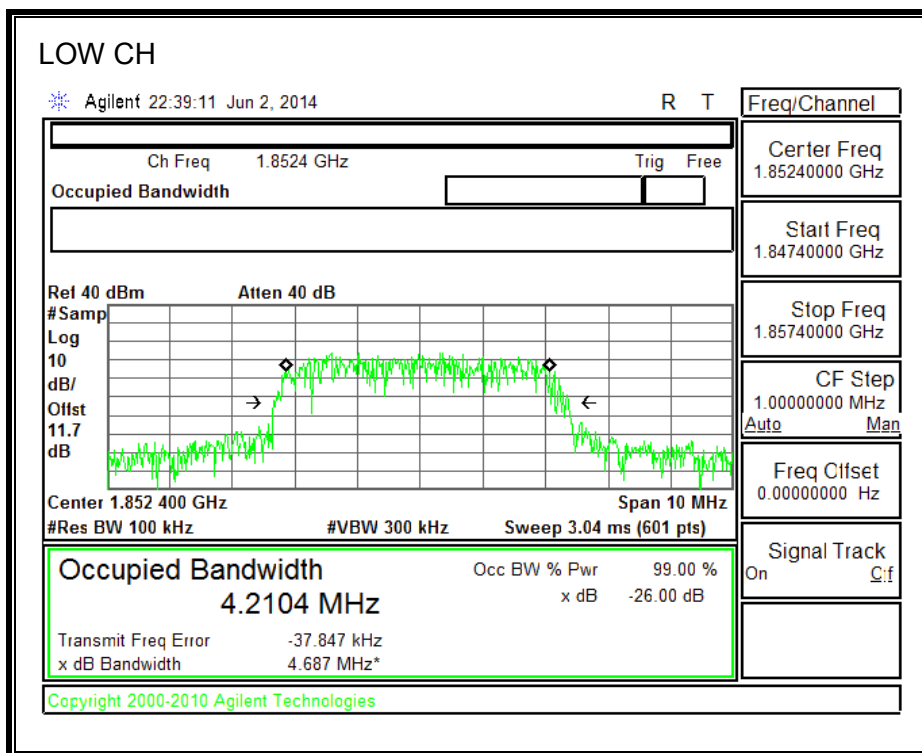

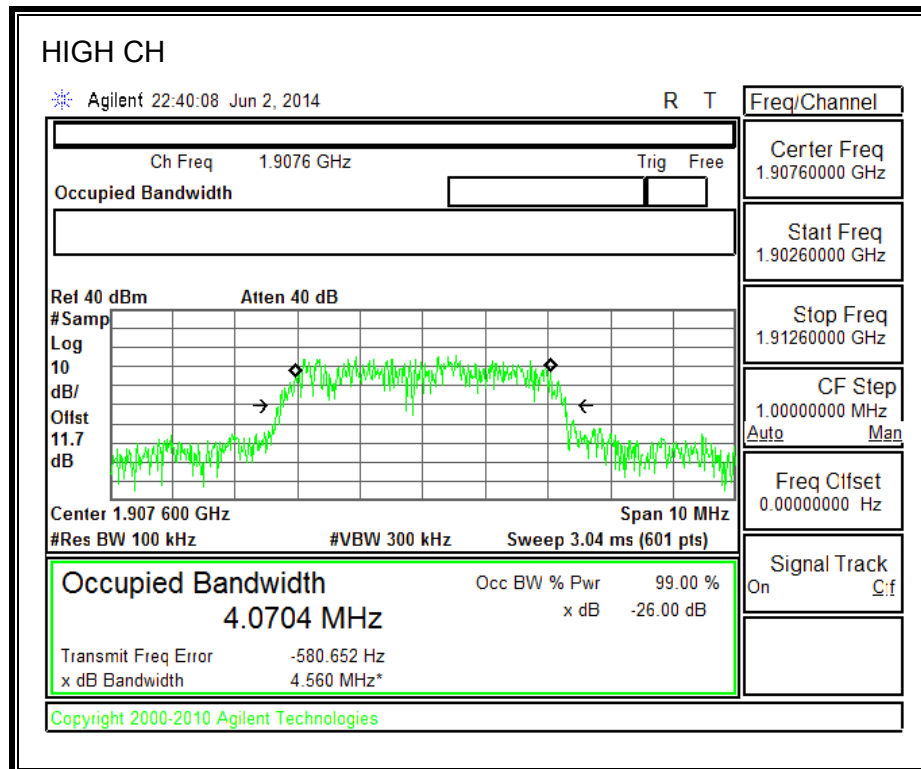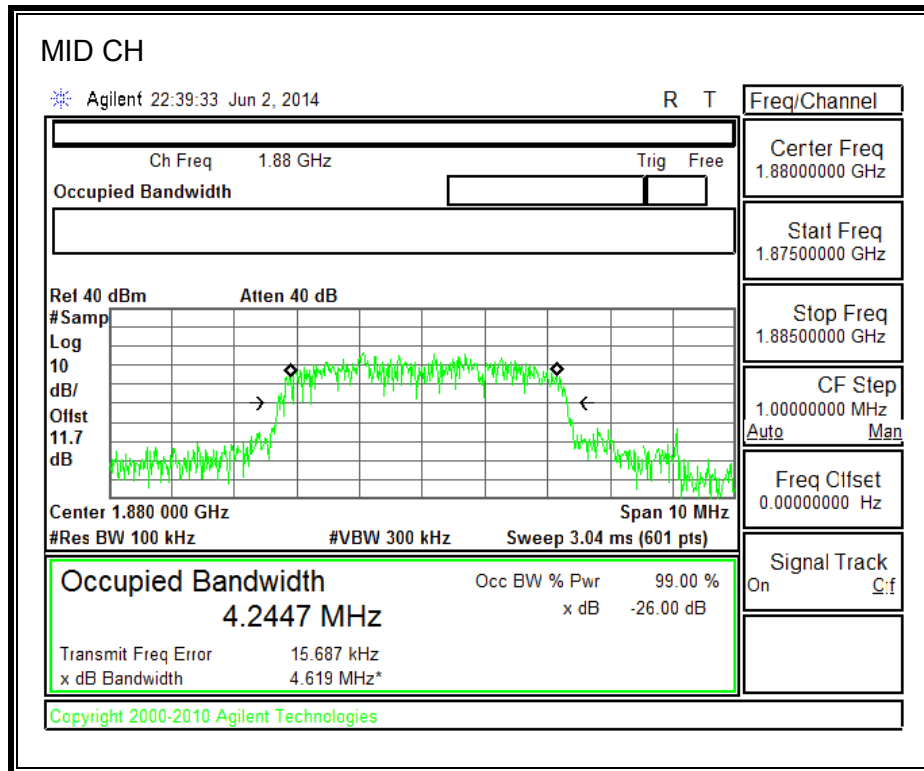



1700MHz BAND

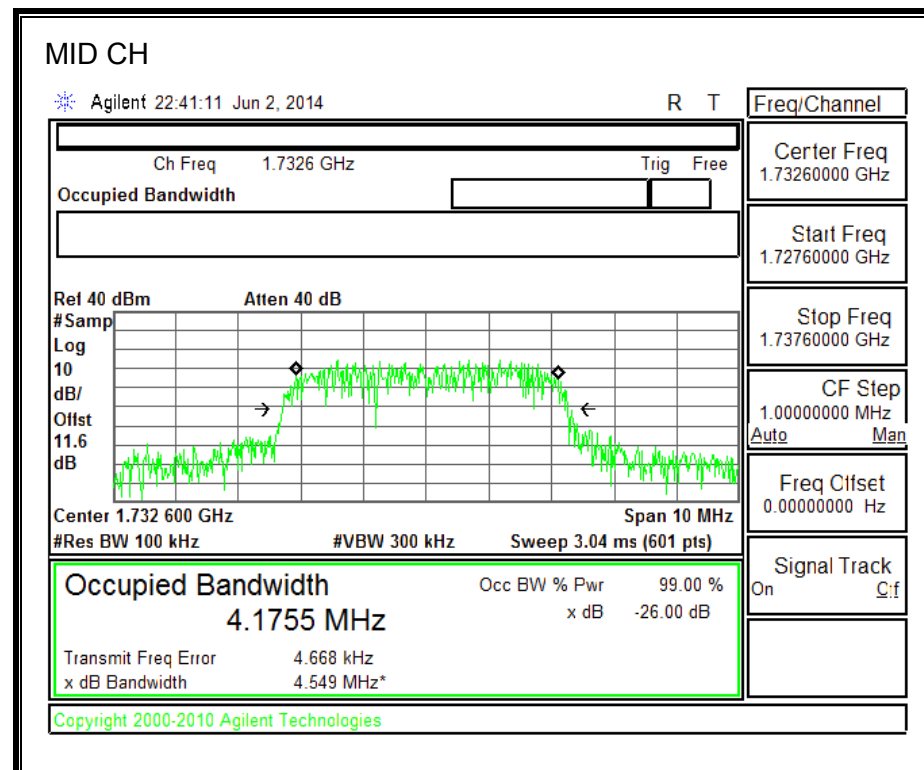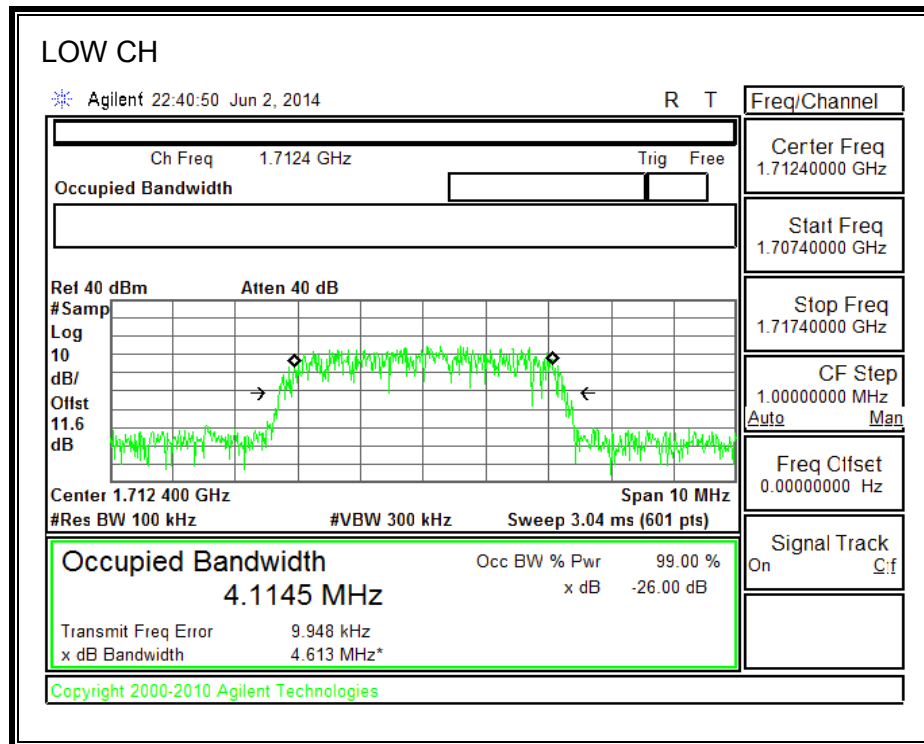


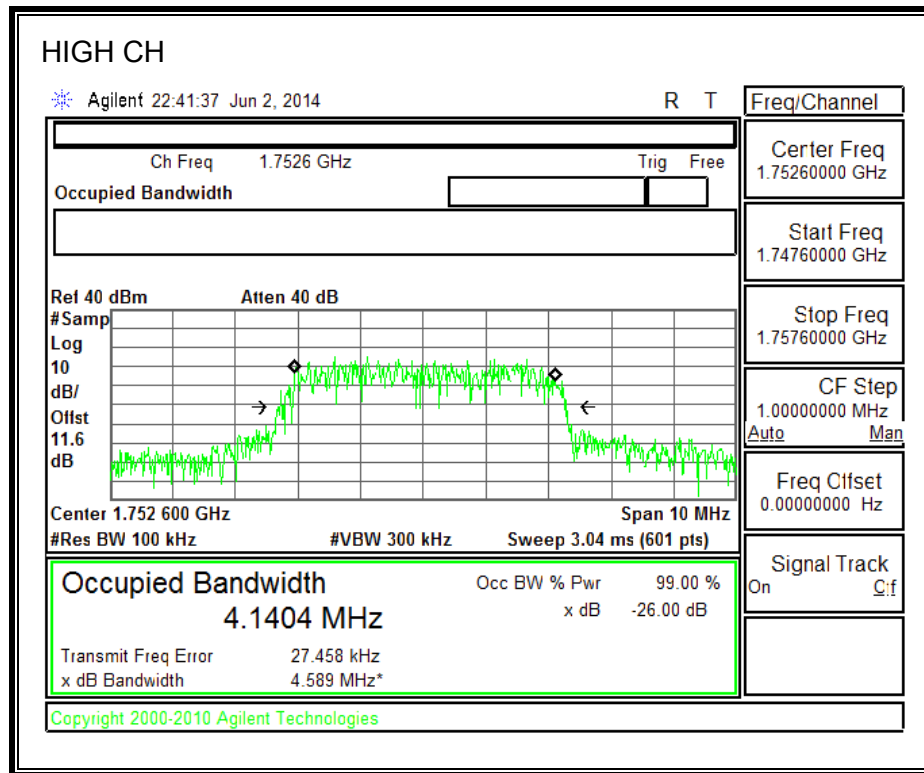


8.1.5. CDMA2000 1xRTT



850MHz BAND

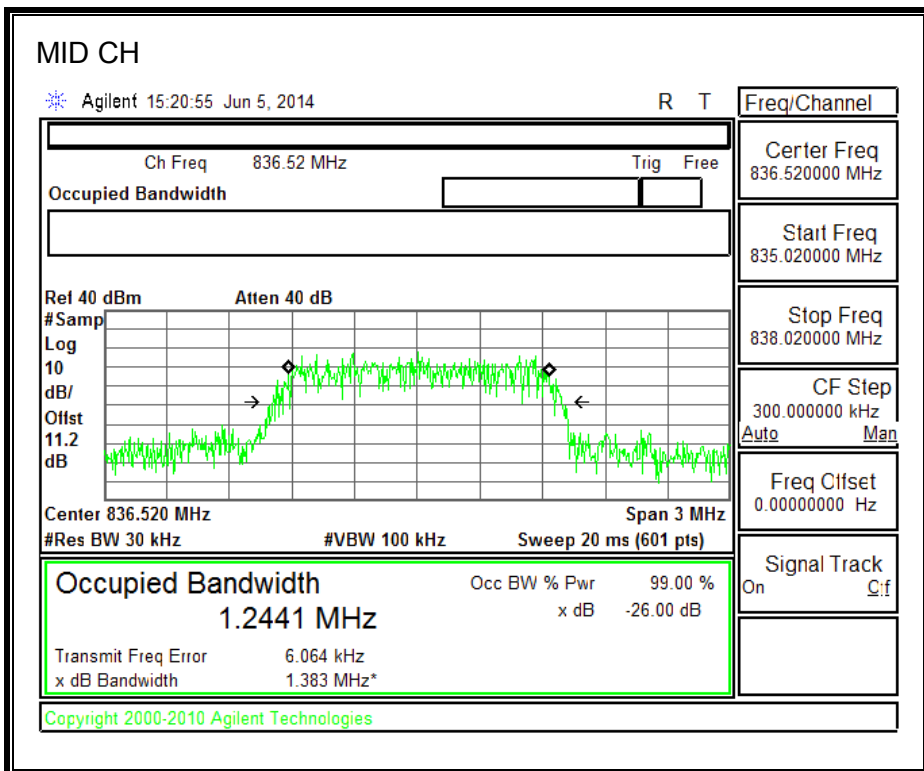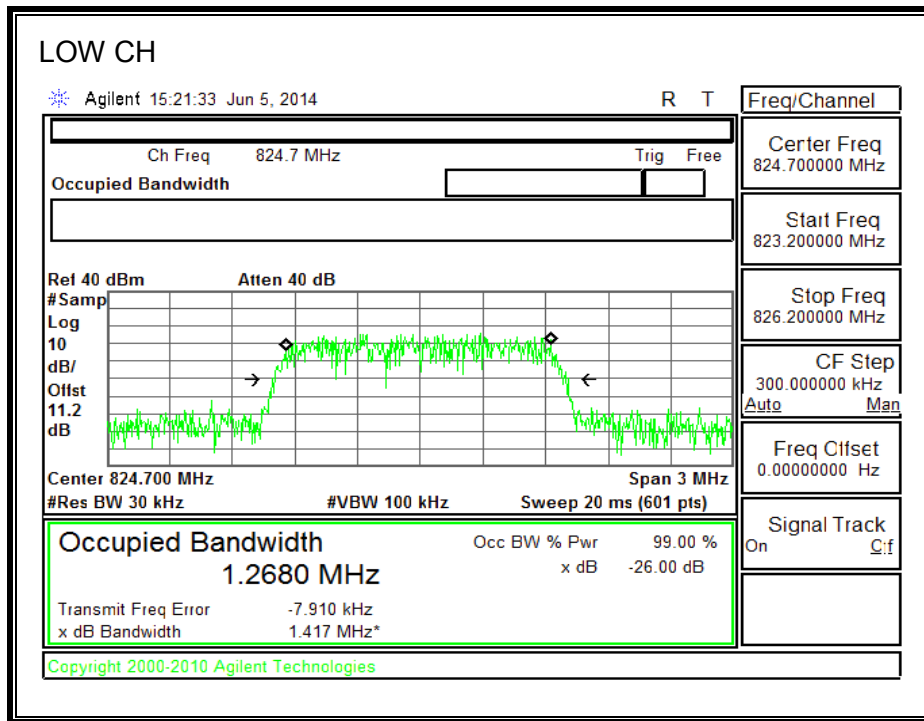


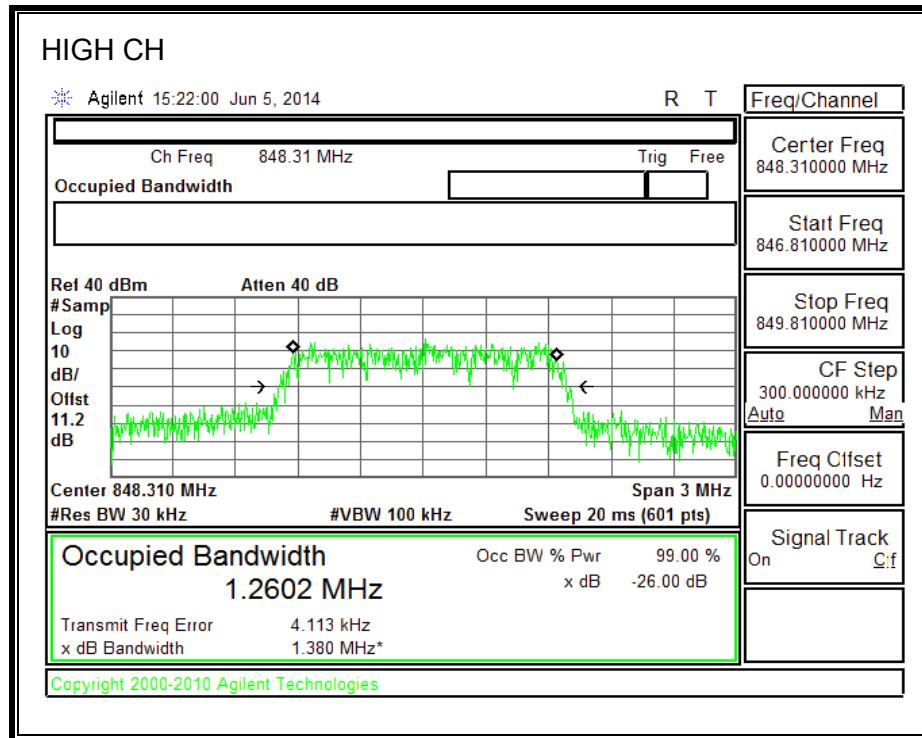



1900MHz BAND

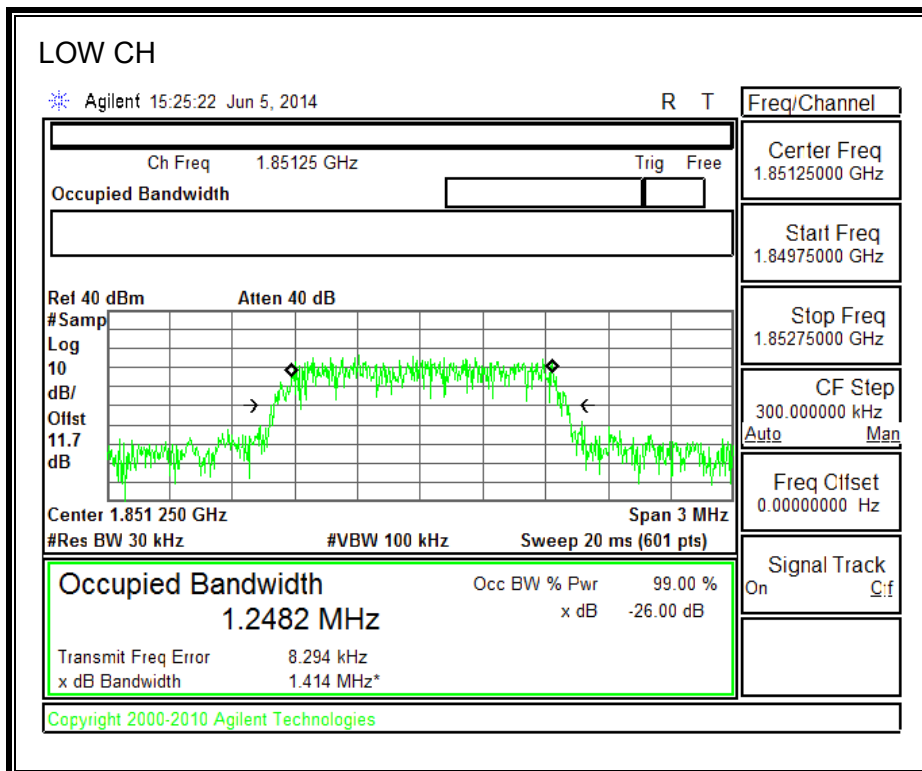

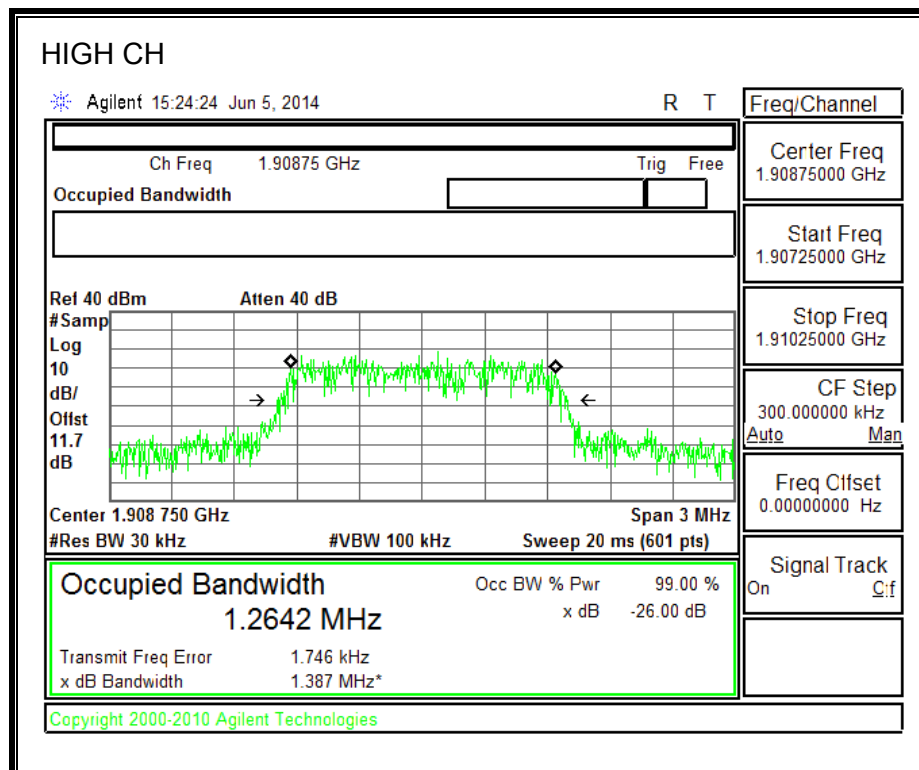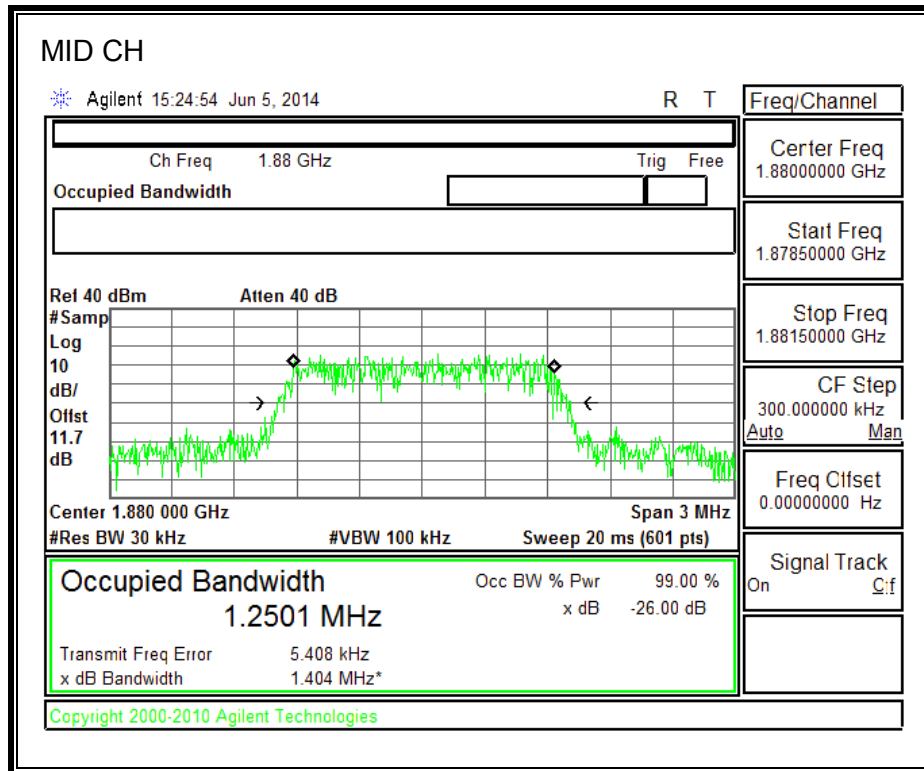




1700MHz BAND

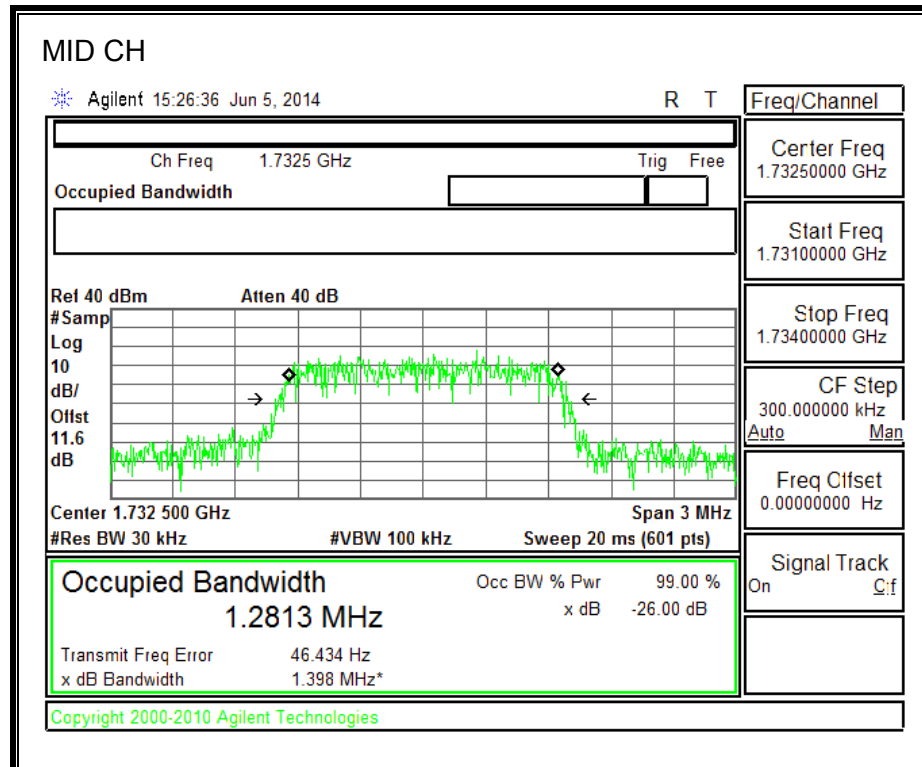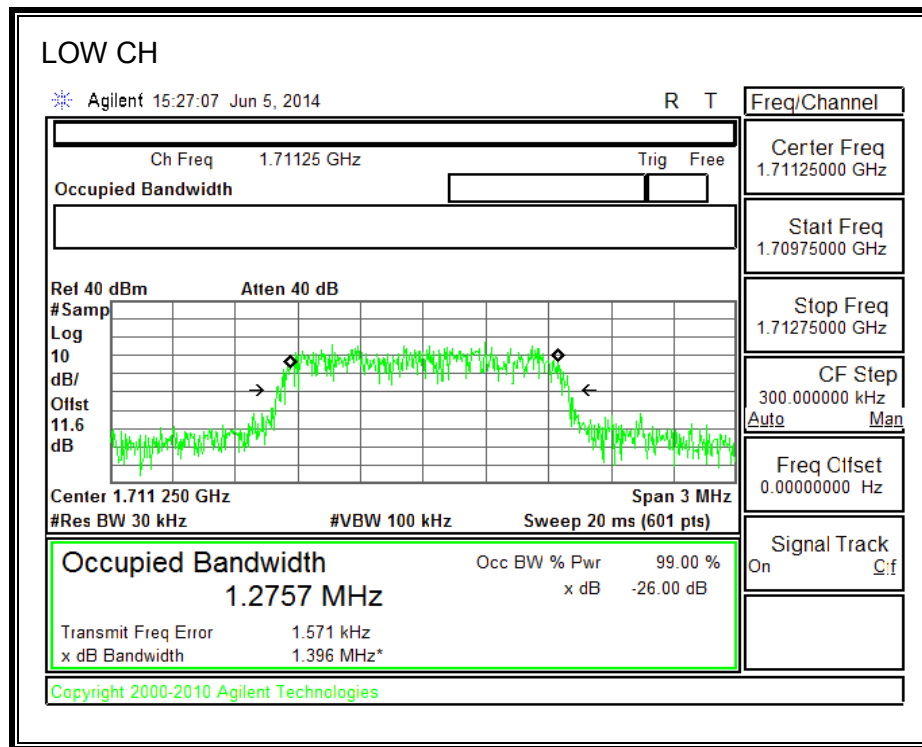

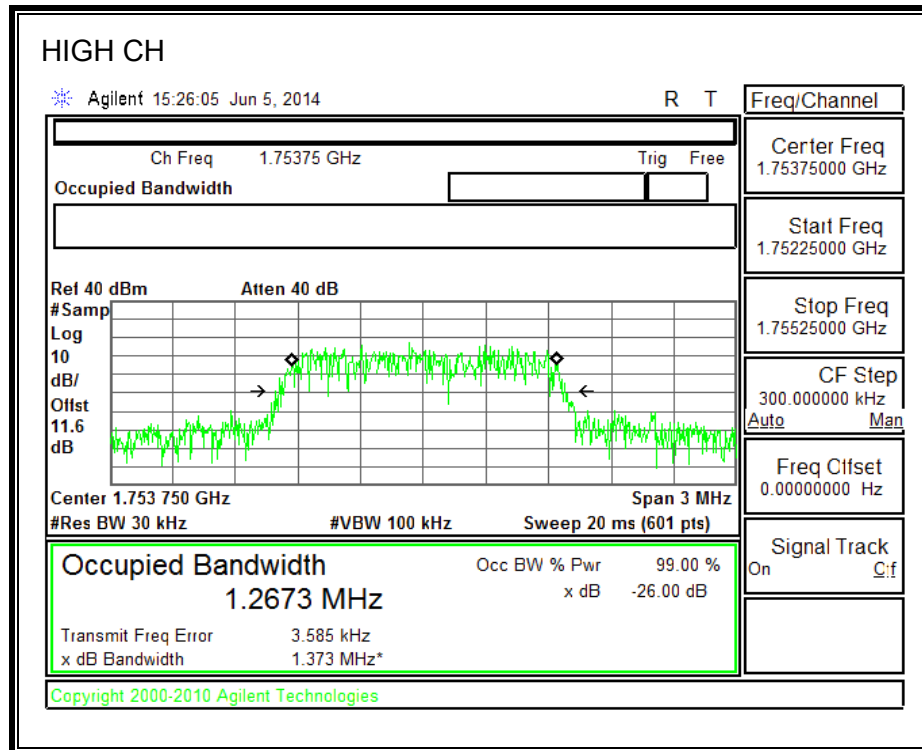



800MHz SECONDARY BAND

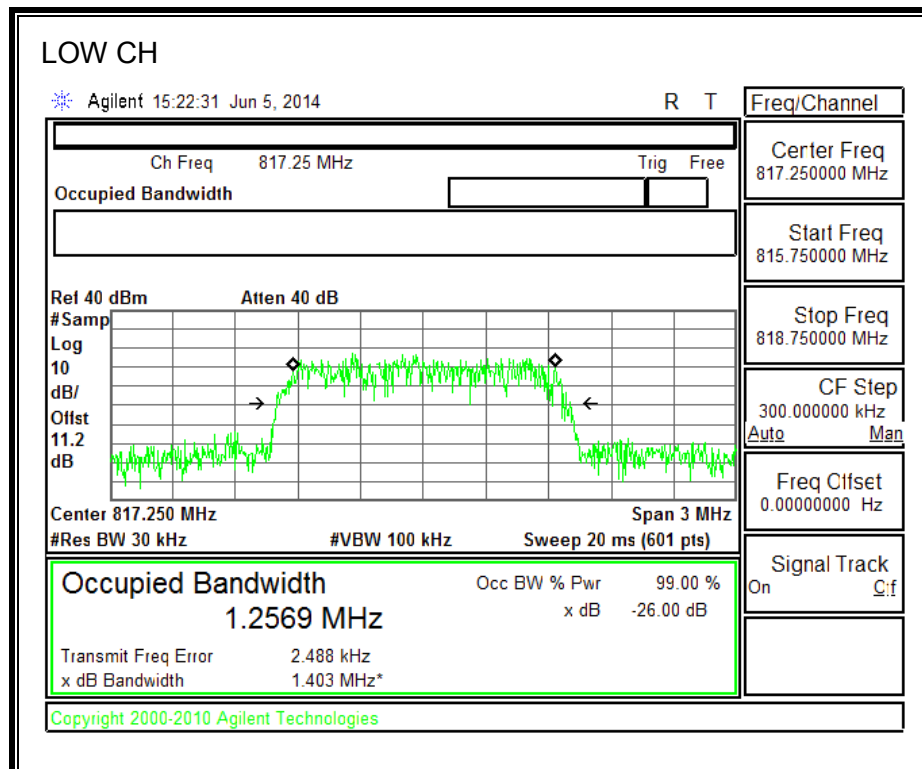


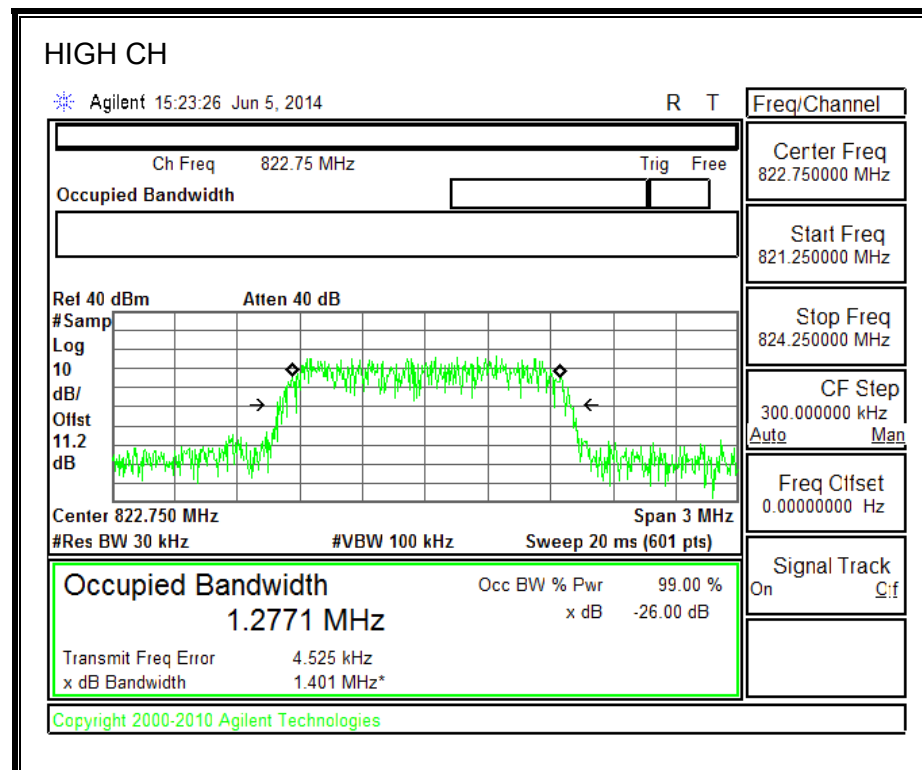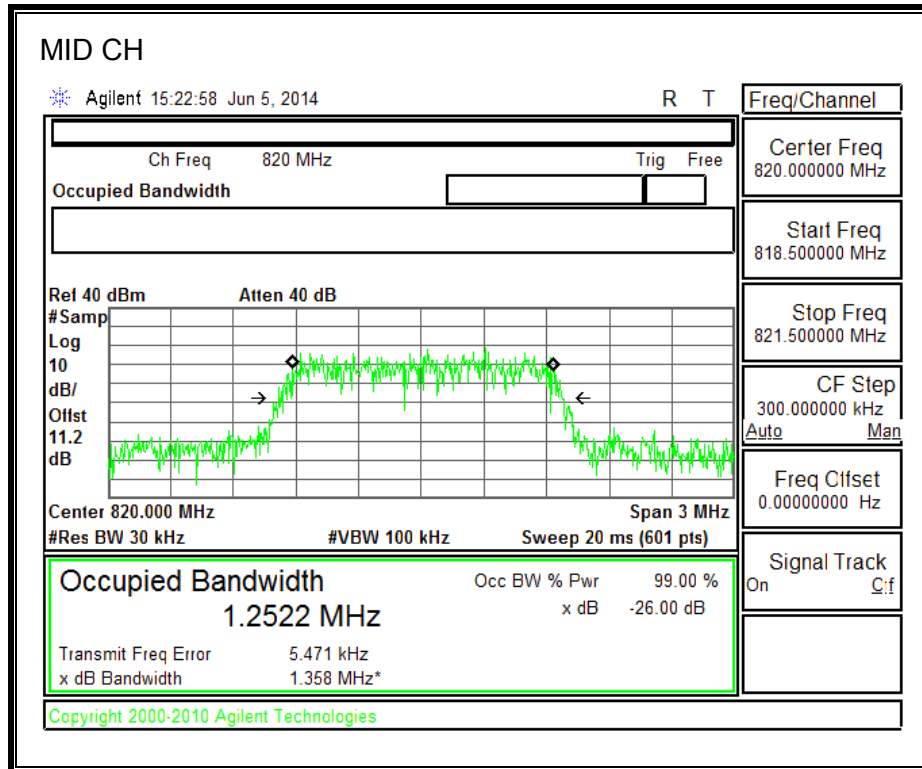


8.1.6. CDMA2000 EVDO Rev. A



850MHz BAND

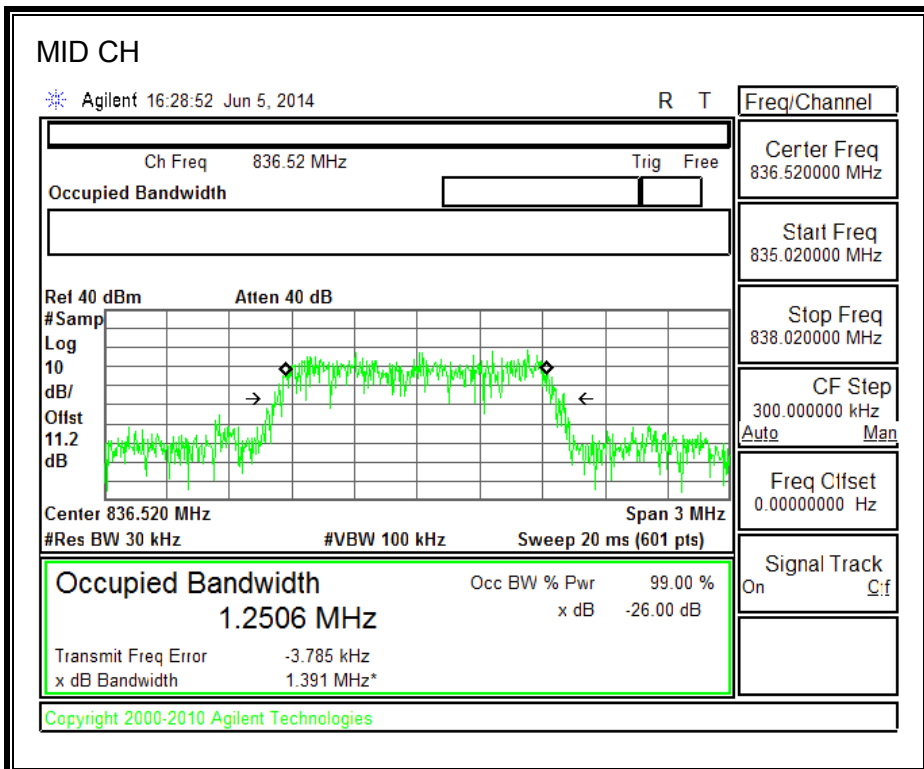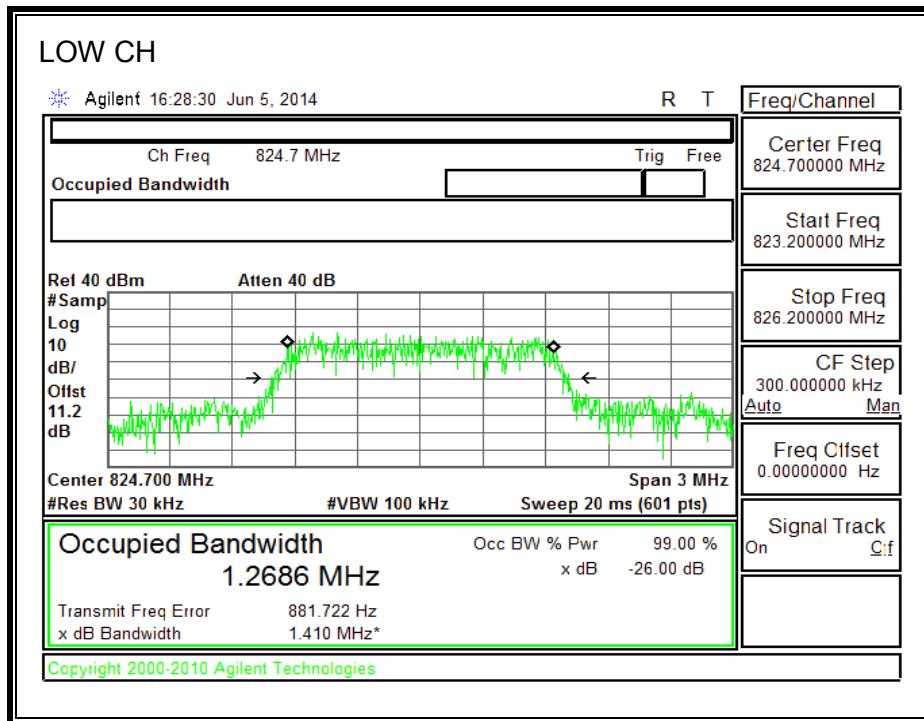


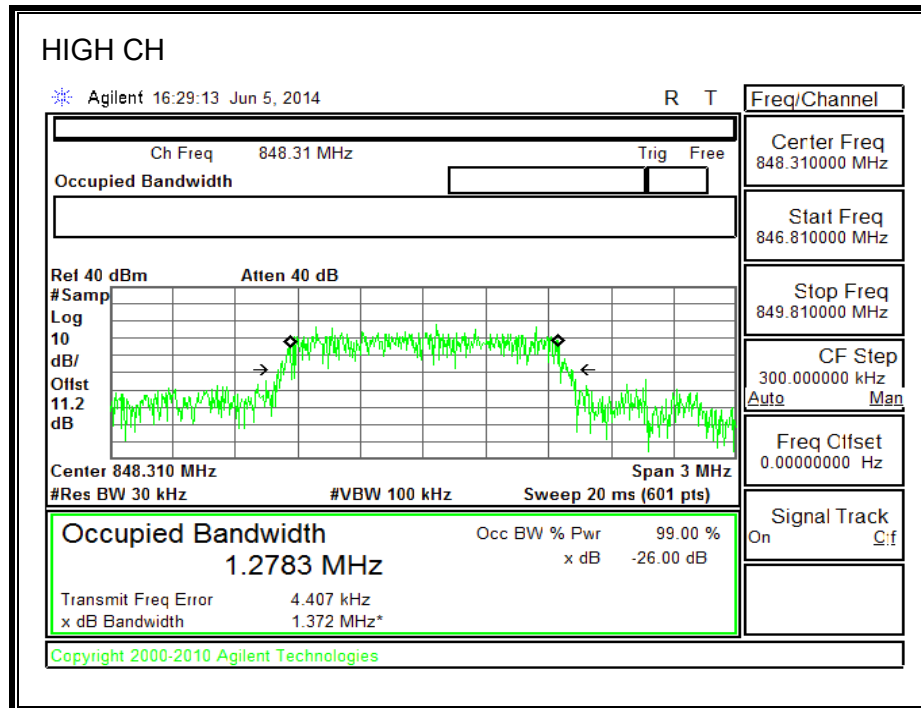



1900MHz BAND

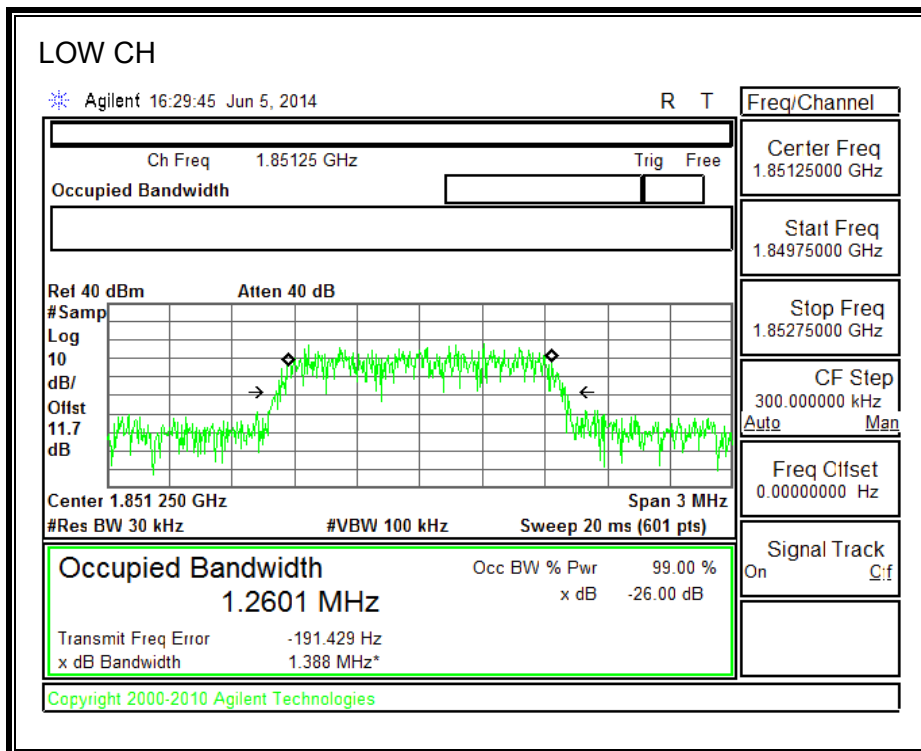

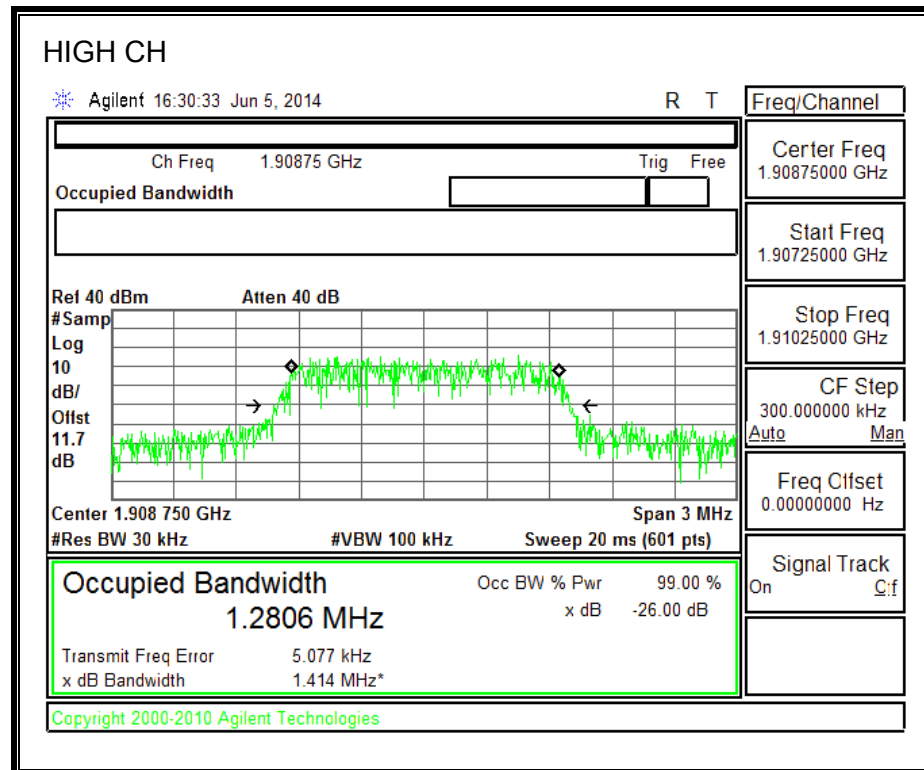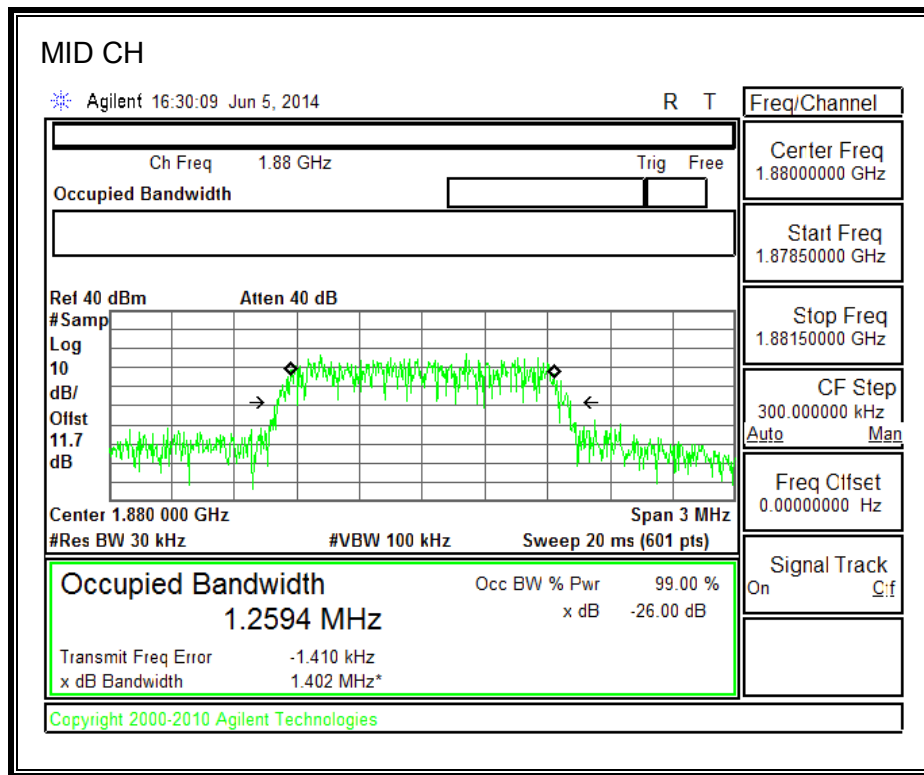




1700MHz BAND

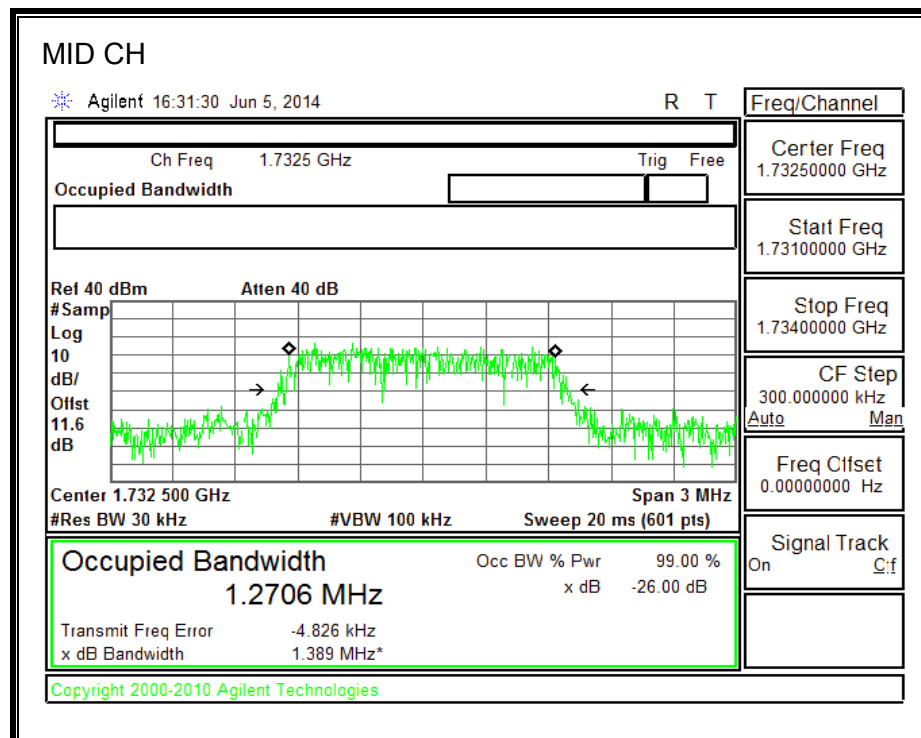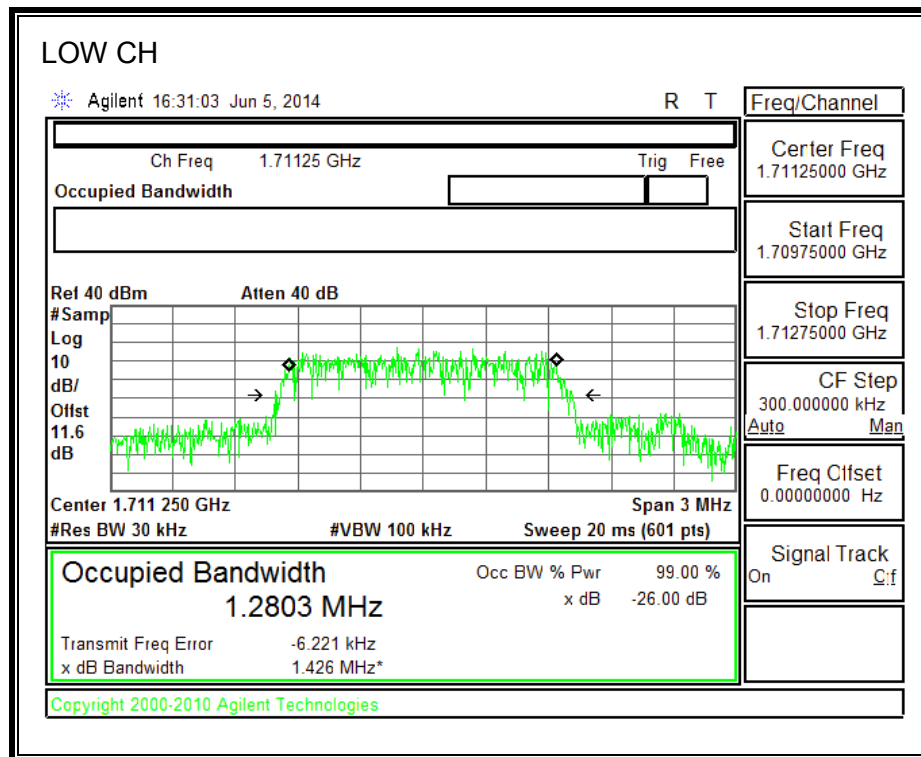

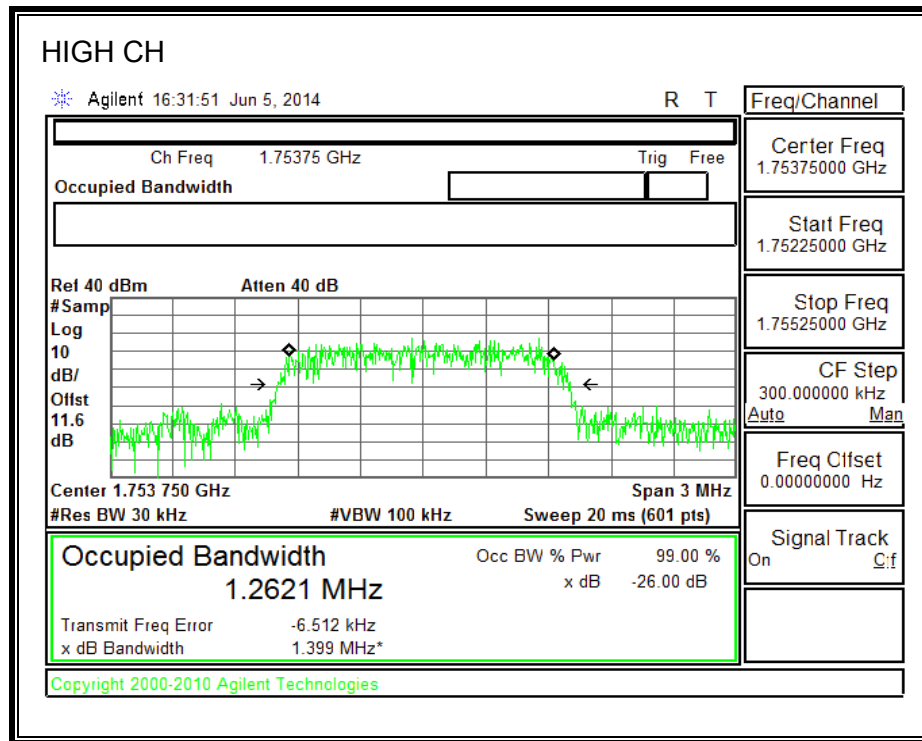



800MHz SECONDARY BAND

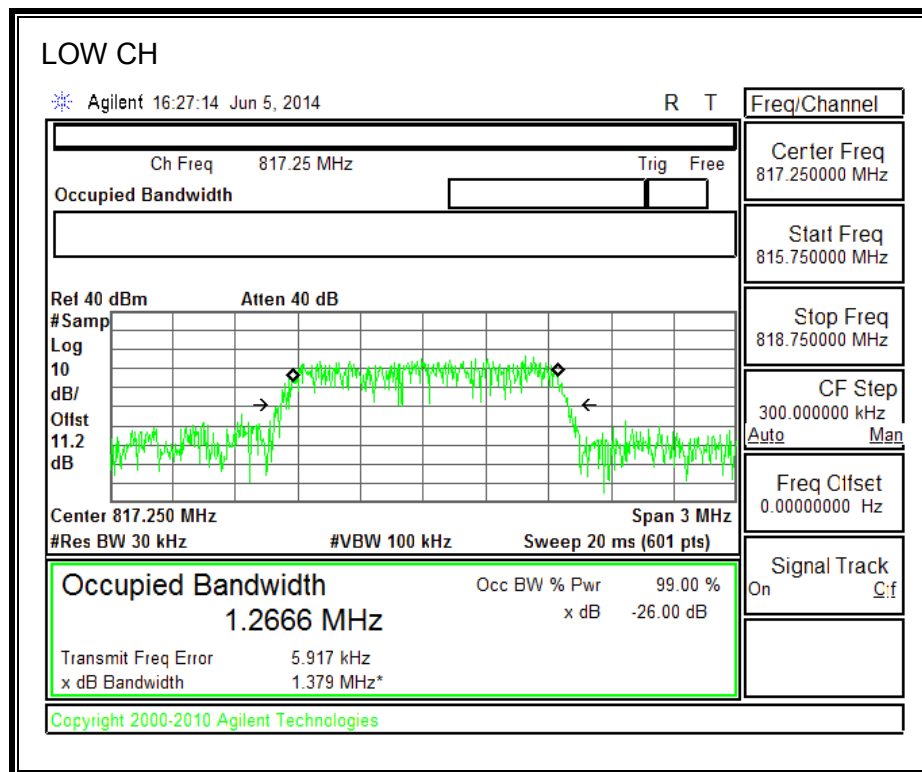


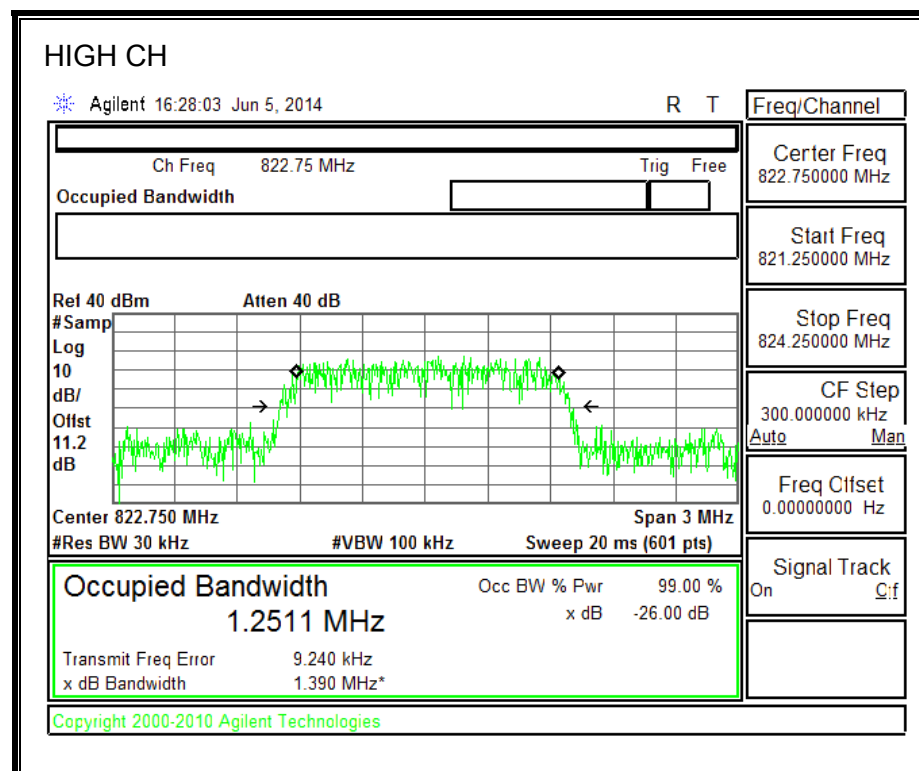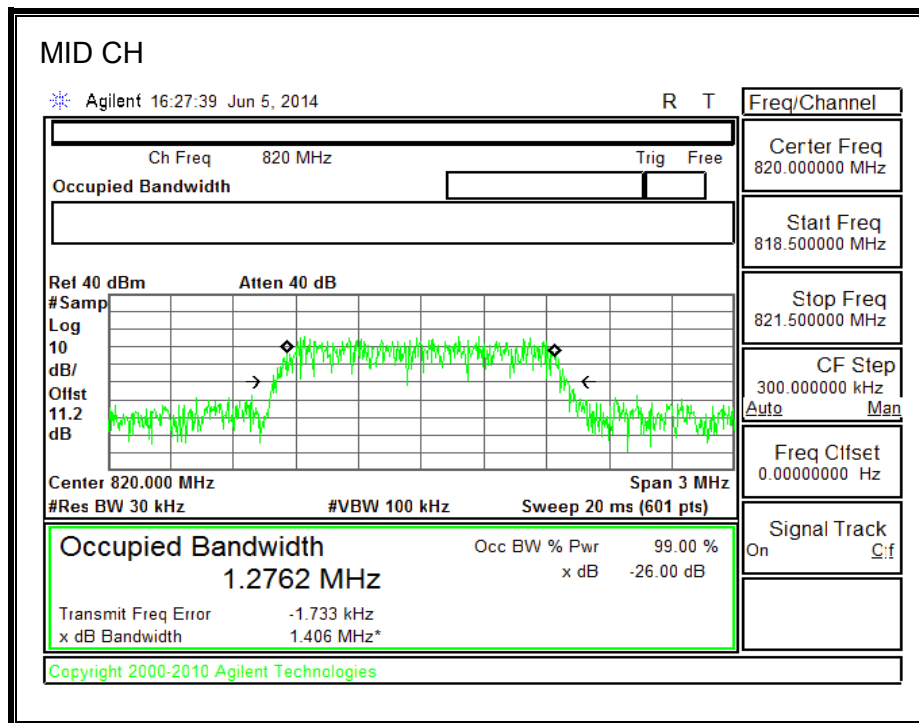


8.1.7. CDMA2000 EVDO Rev. B



2 CARRIER MIN

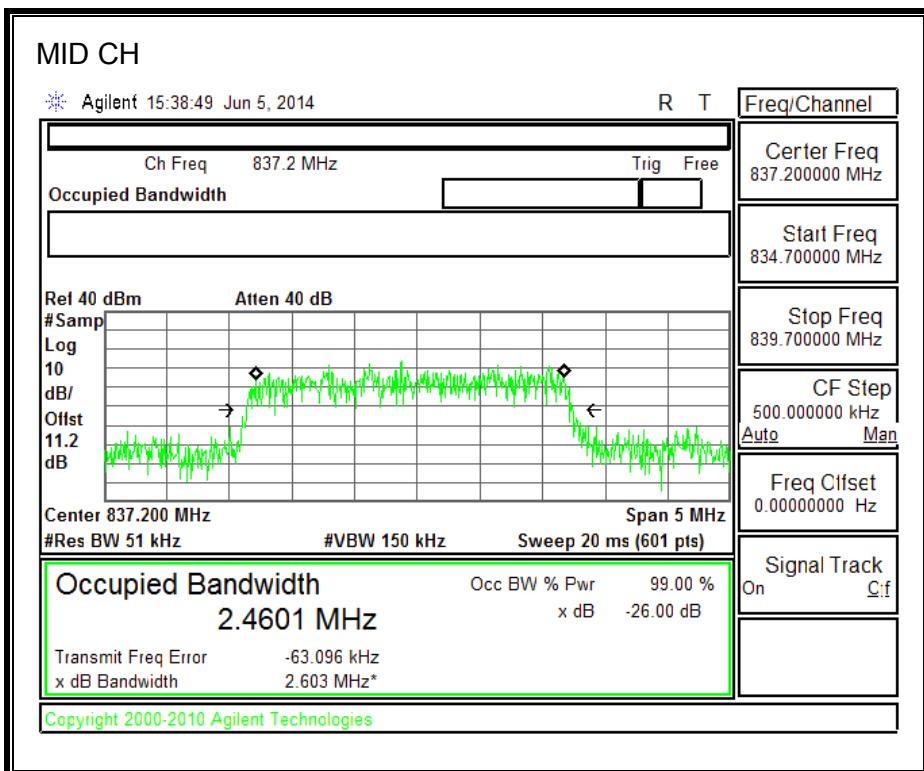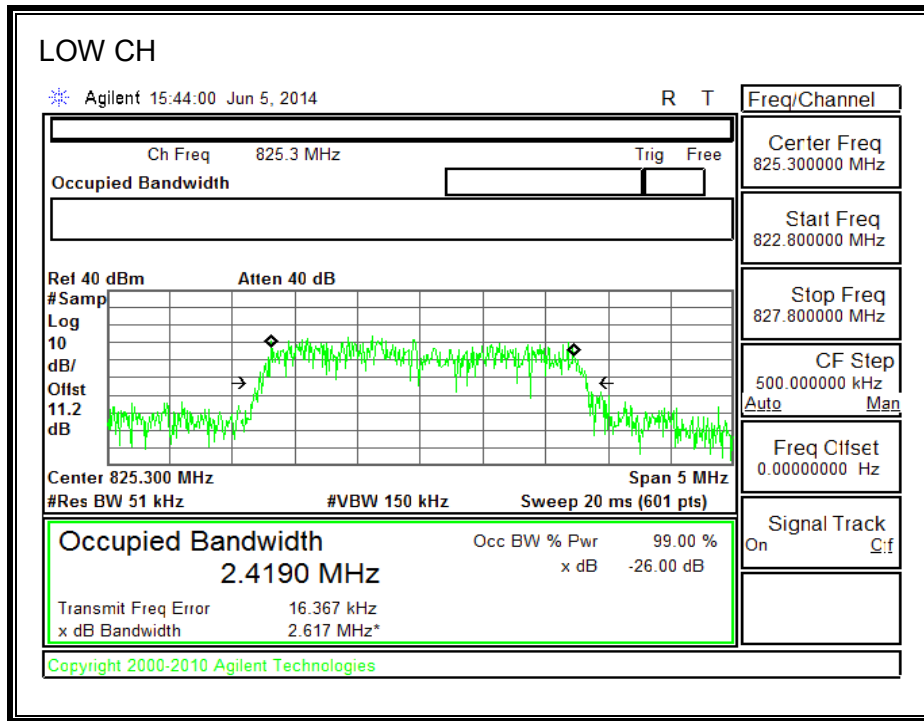


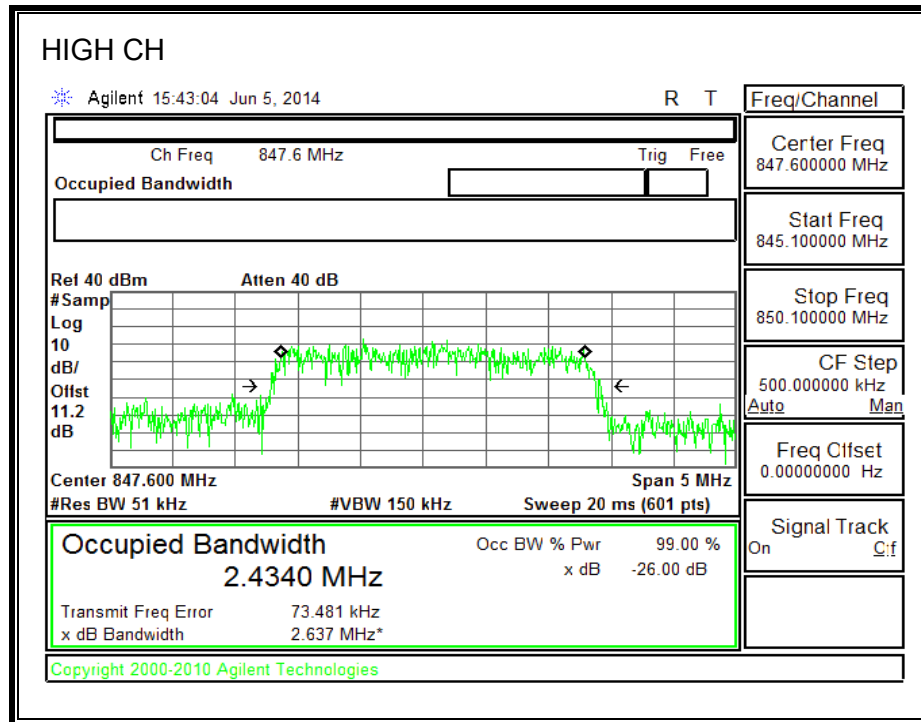



2 CARRIER MAX

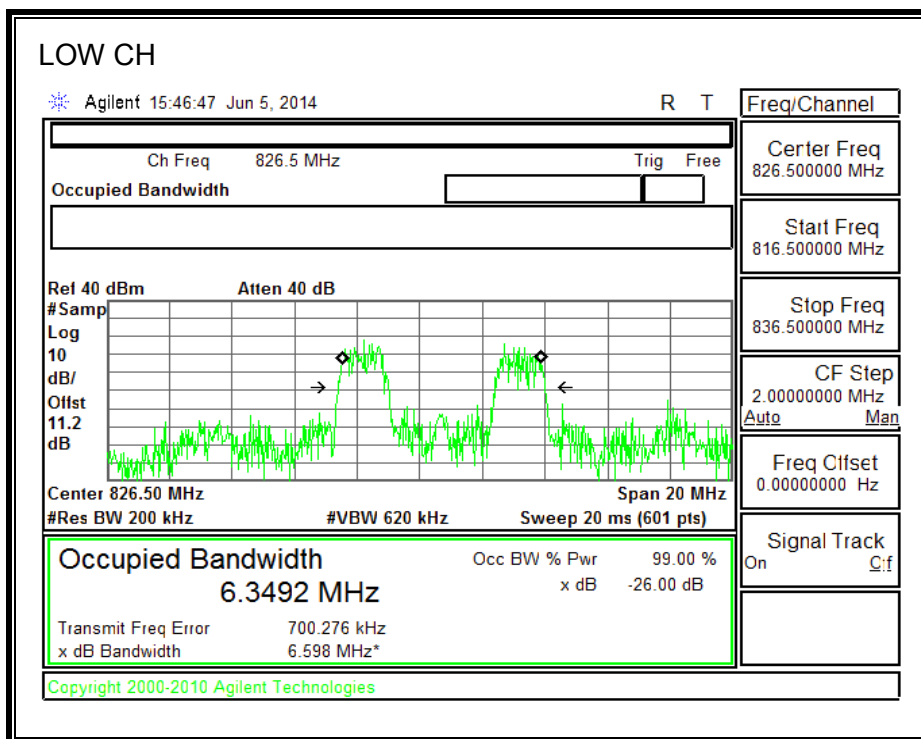

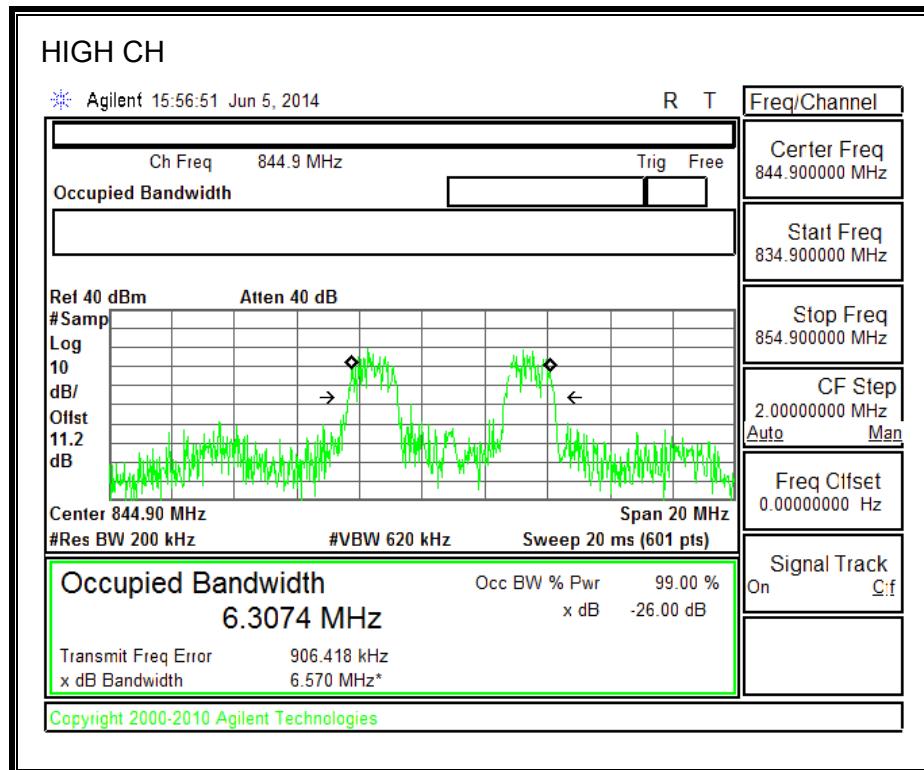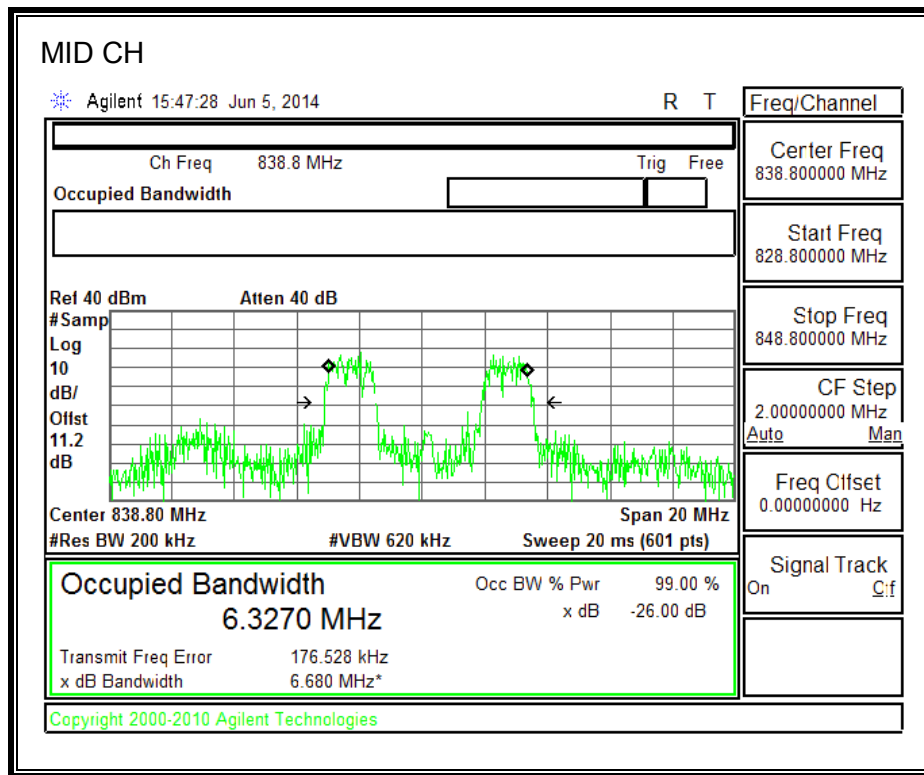

3 CARRIER MIN

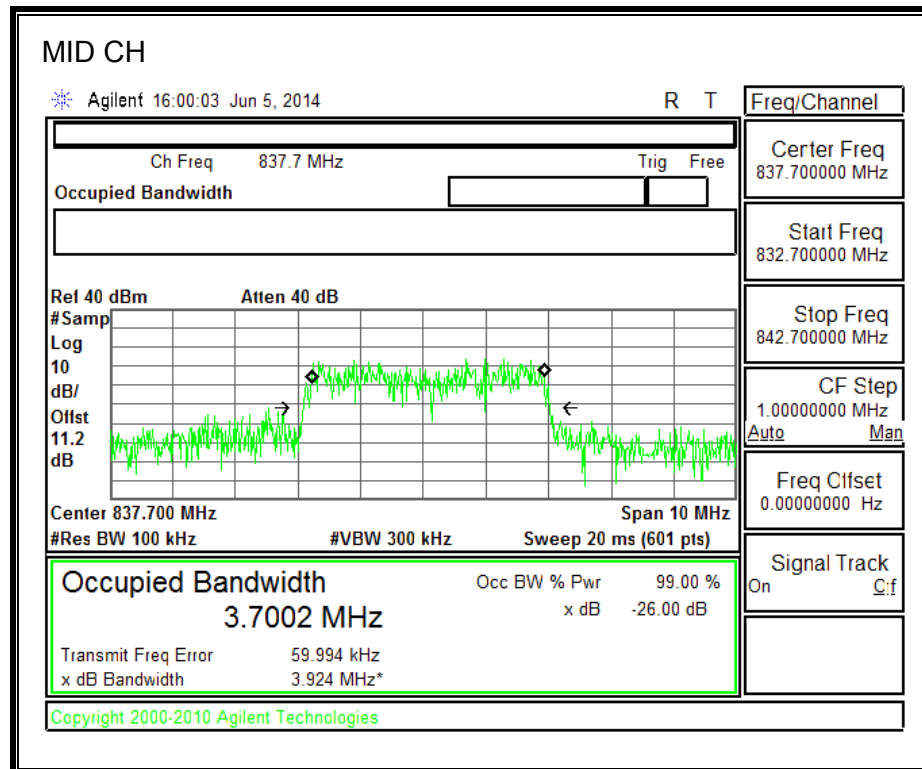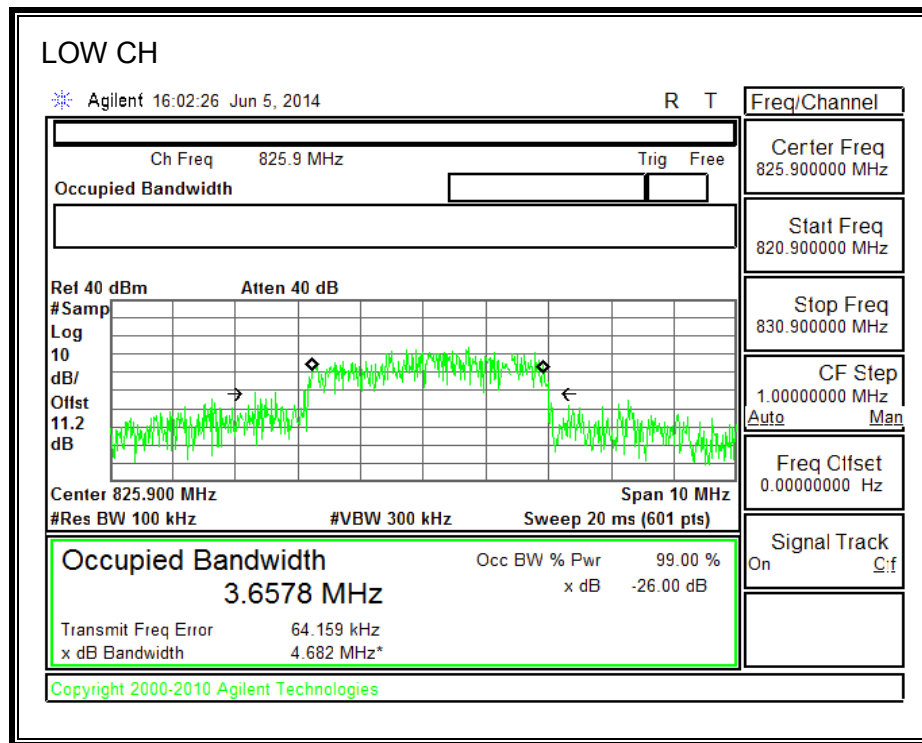

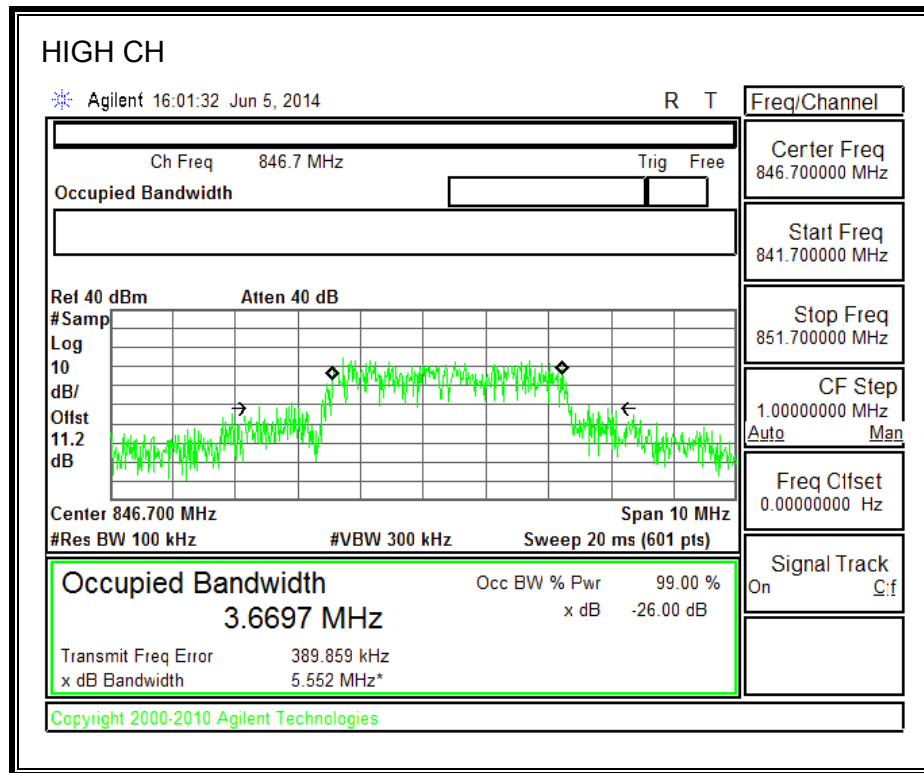

8.2. BAND EDGE

RULE PART(S)

FCC: §22.359, 24.238 §27.53, § 90.691.

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

Compliance with the provisions of paragraphs above of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

RULE PART(S) for Emission Mask

FCC: §90.210, and §90.691

(a)(1)For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(a)(2)For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz. {NOTE: Use 100 kHz reference bandwidth

TEST PROCEDURE

The transmitter output was connected to a Agilent 8960 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency (824, 849, 1850, 1910MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.



MODES TESTED

- GPRS and EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, BC0, BC1, BC10 and BC15



RESULTS

8.2.1. GSM-GPRS

850MHz BAND

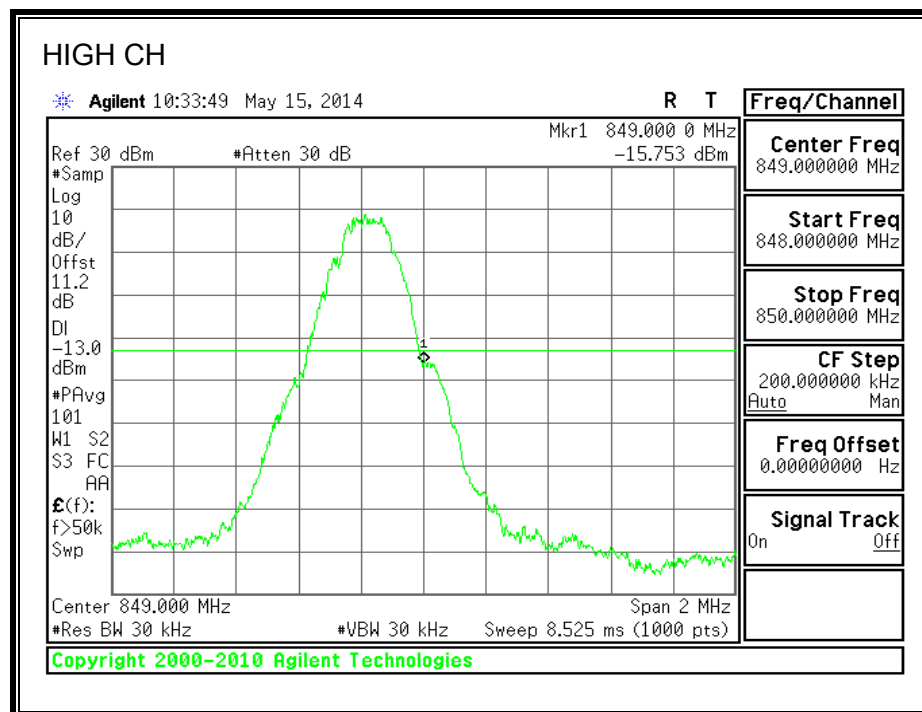
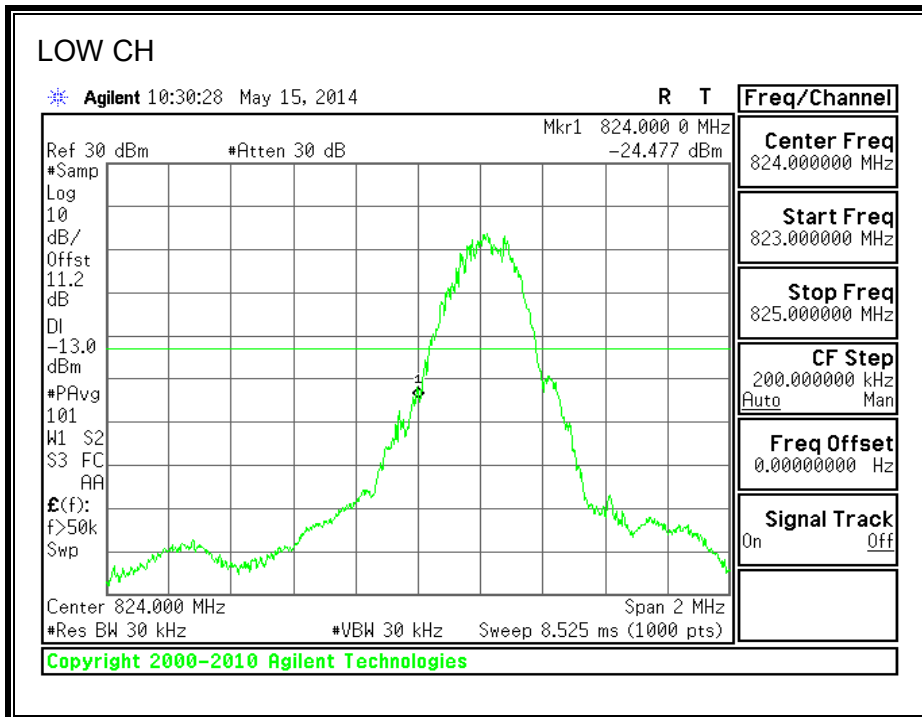


1900MHz BAND

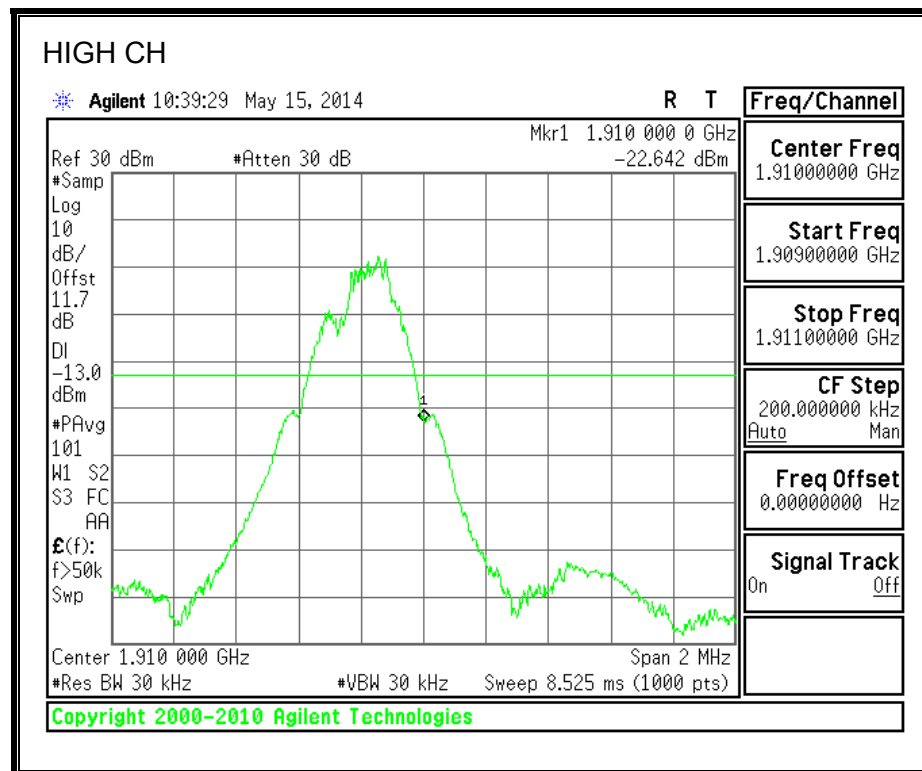
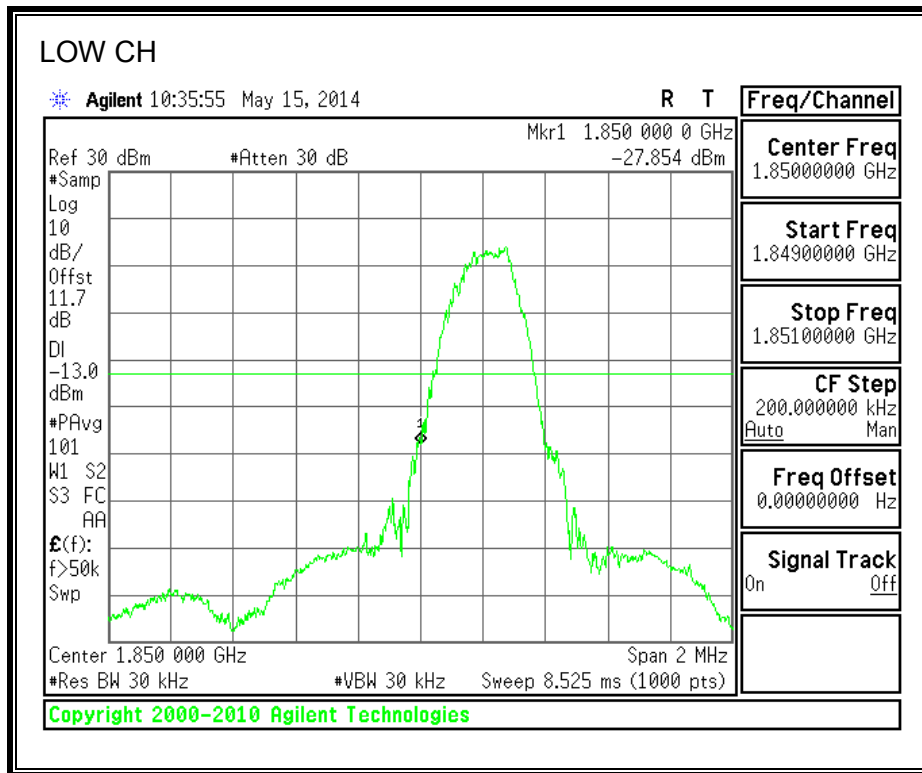


8.2.2. GSM-EGPRS

850MHz BAND

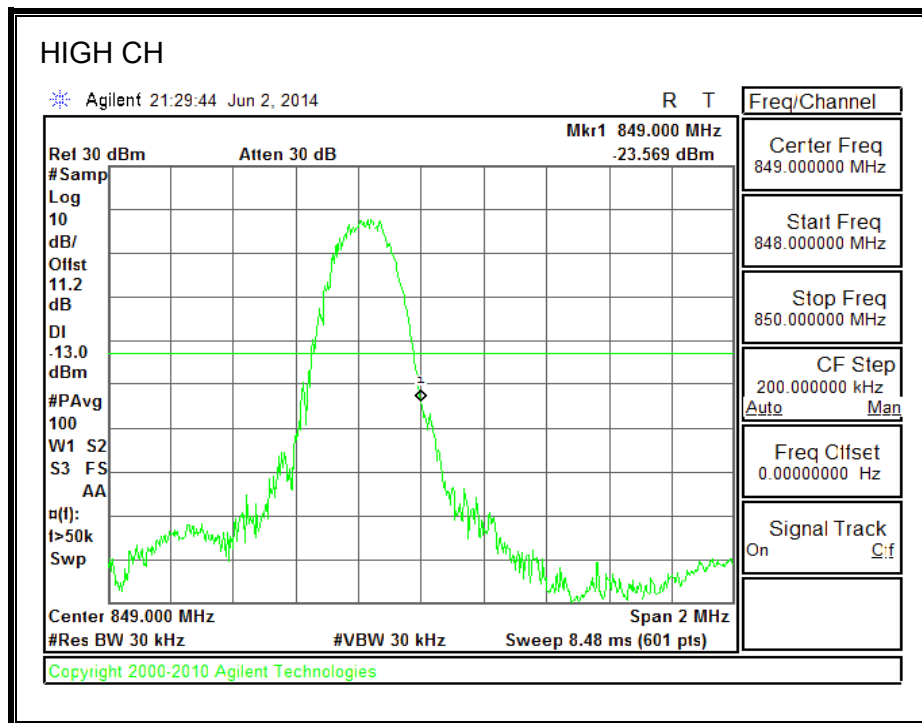
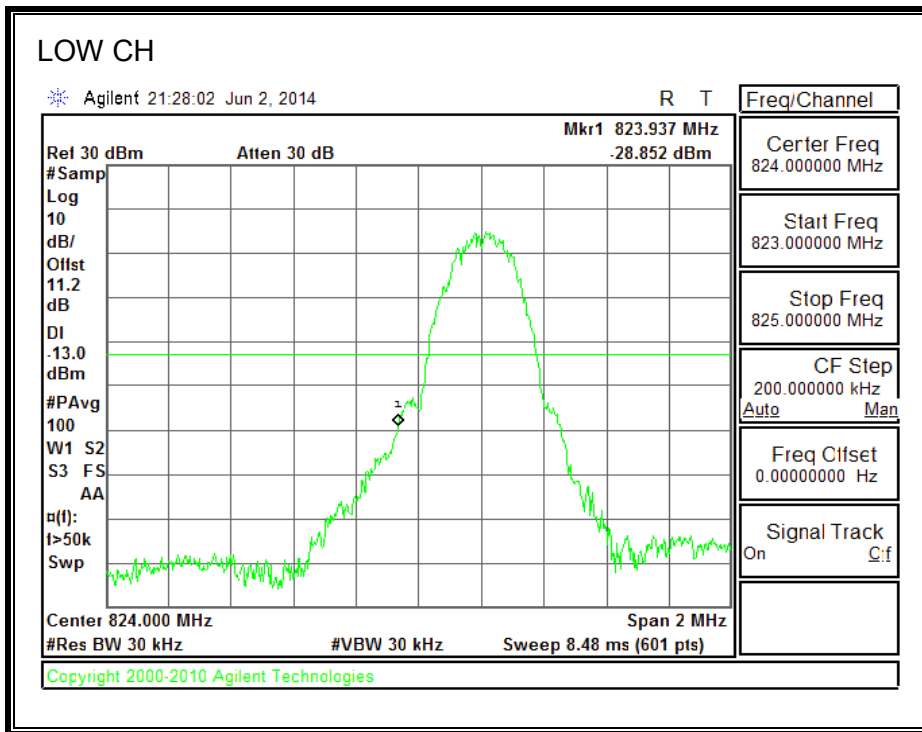


1900MHz BAND

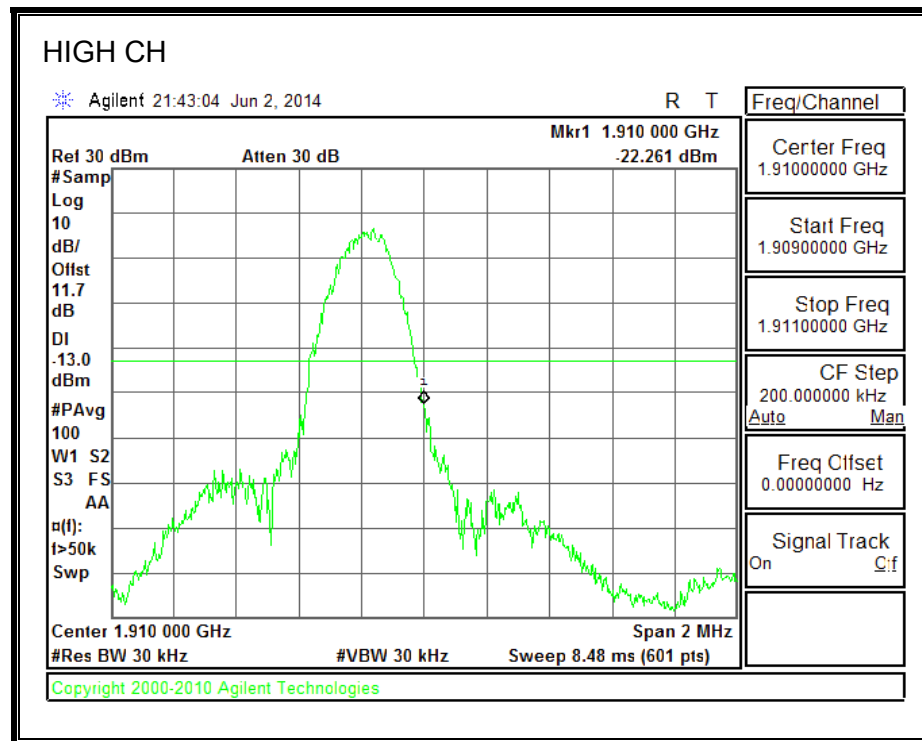
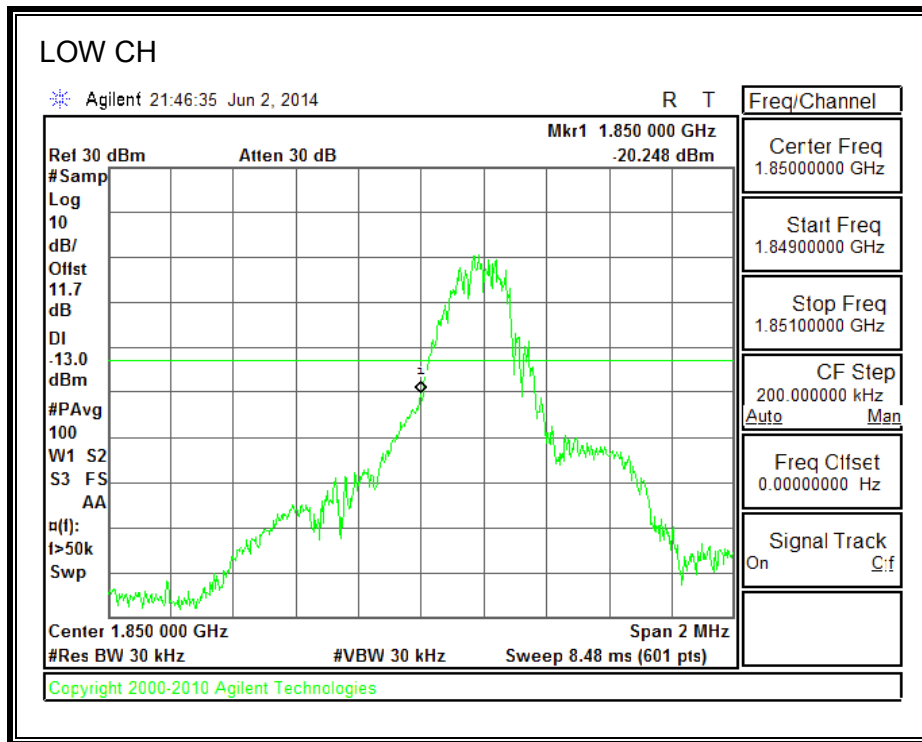


8.2.3. UMTS Rel. 99



850MHz BAND

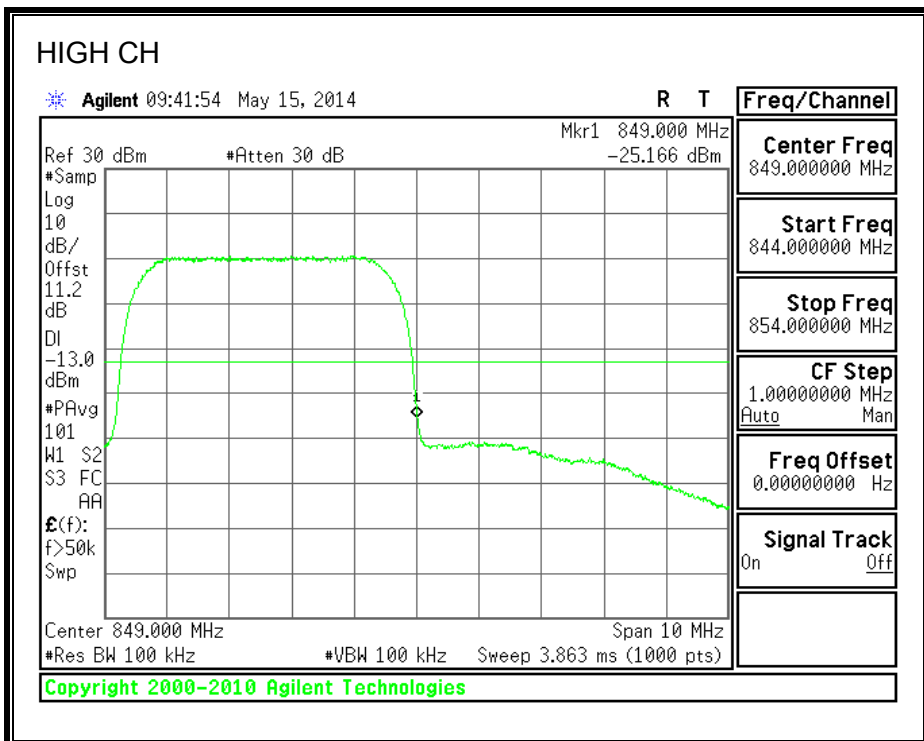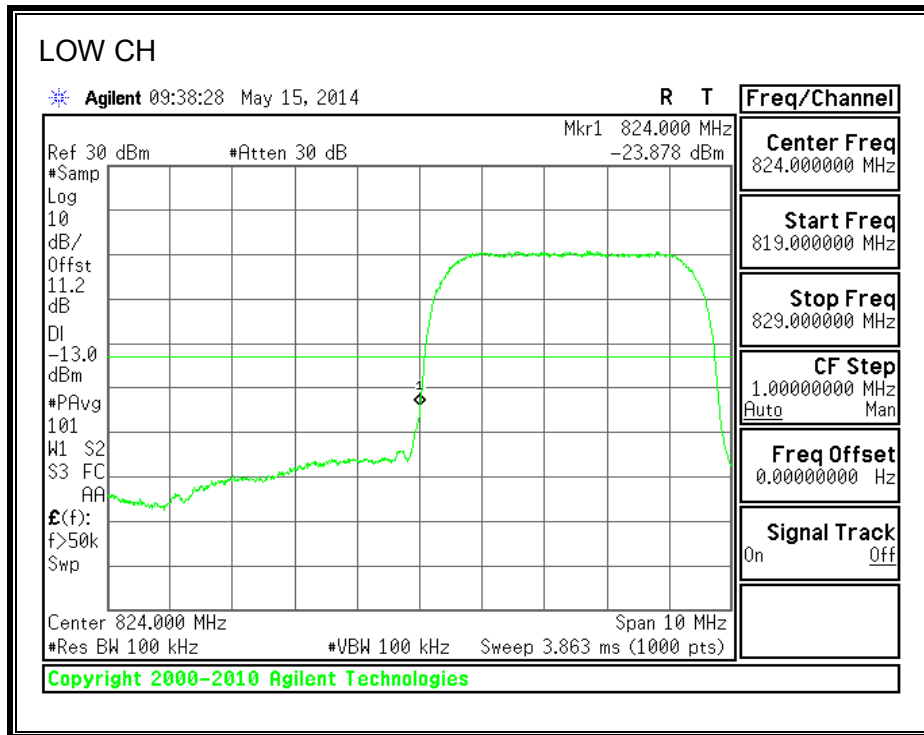

1900MHz BAND

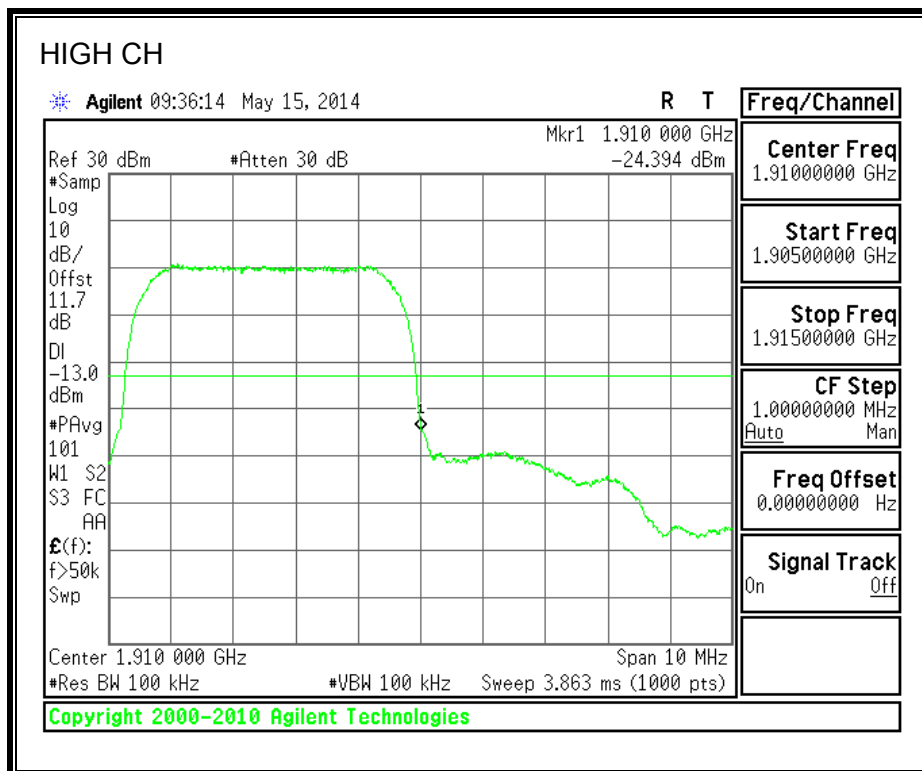
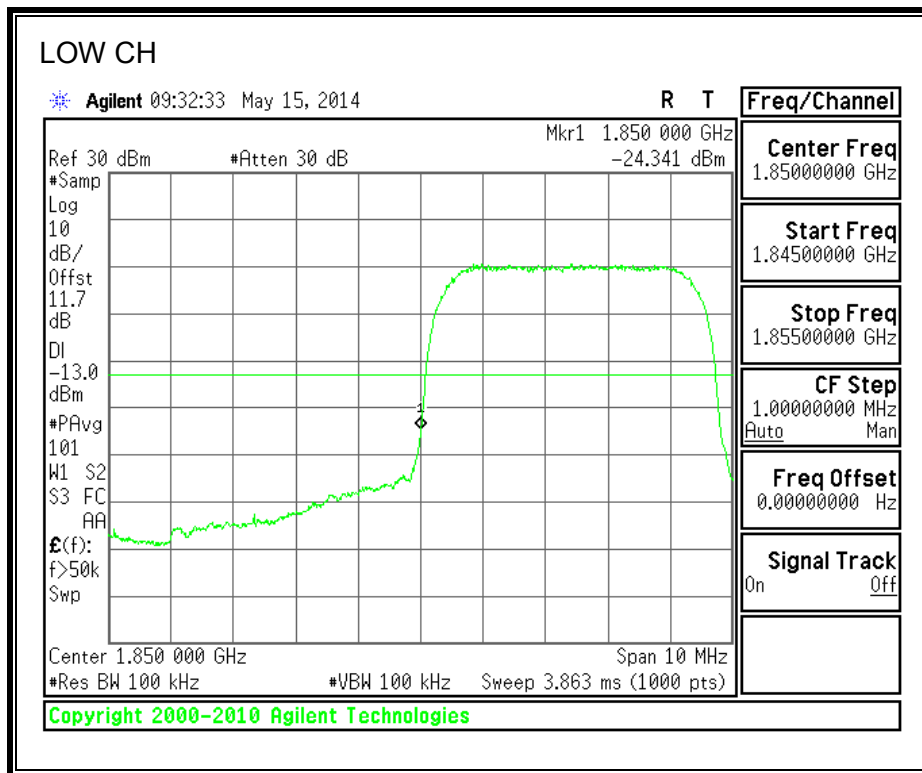


1700MHz BAND

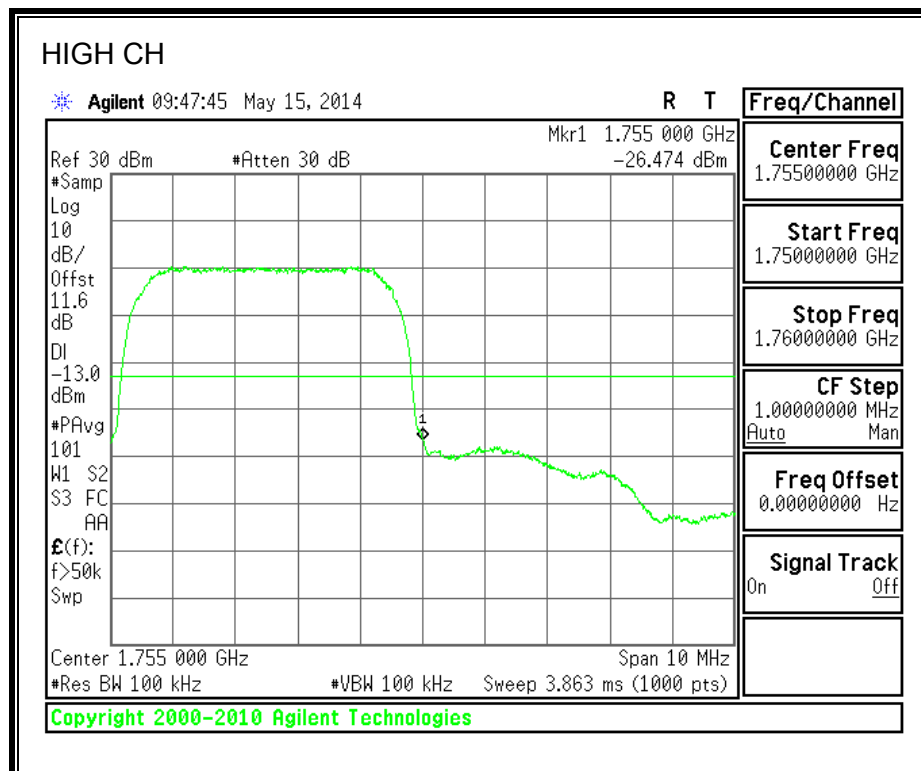
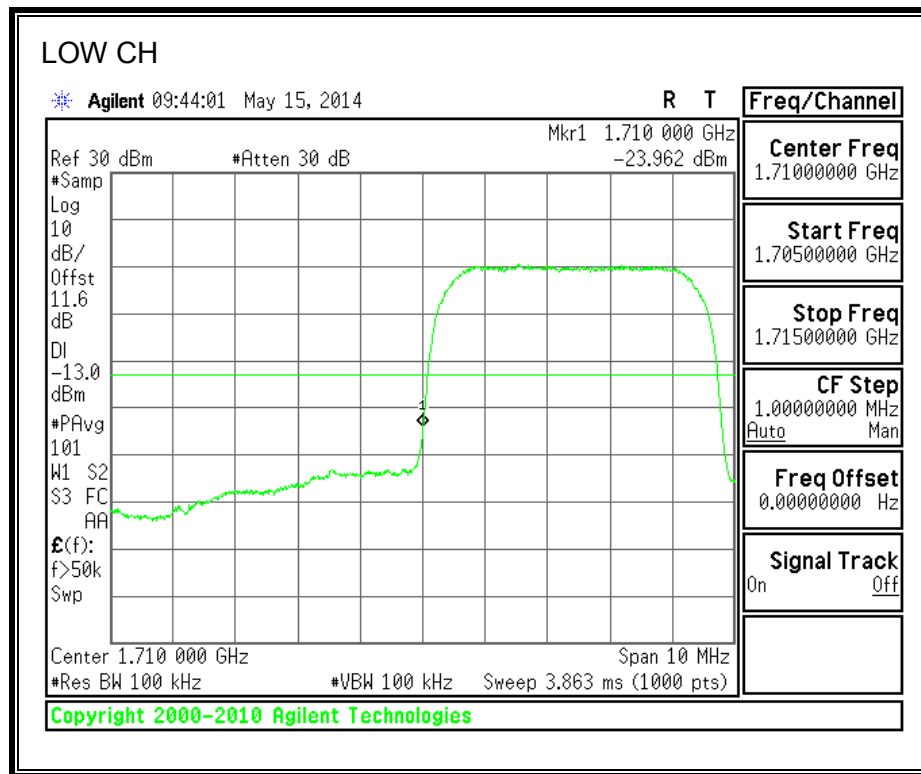


8.2.4. UMTS HSDPA



850MHz BAND

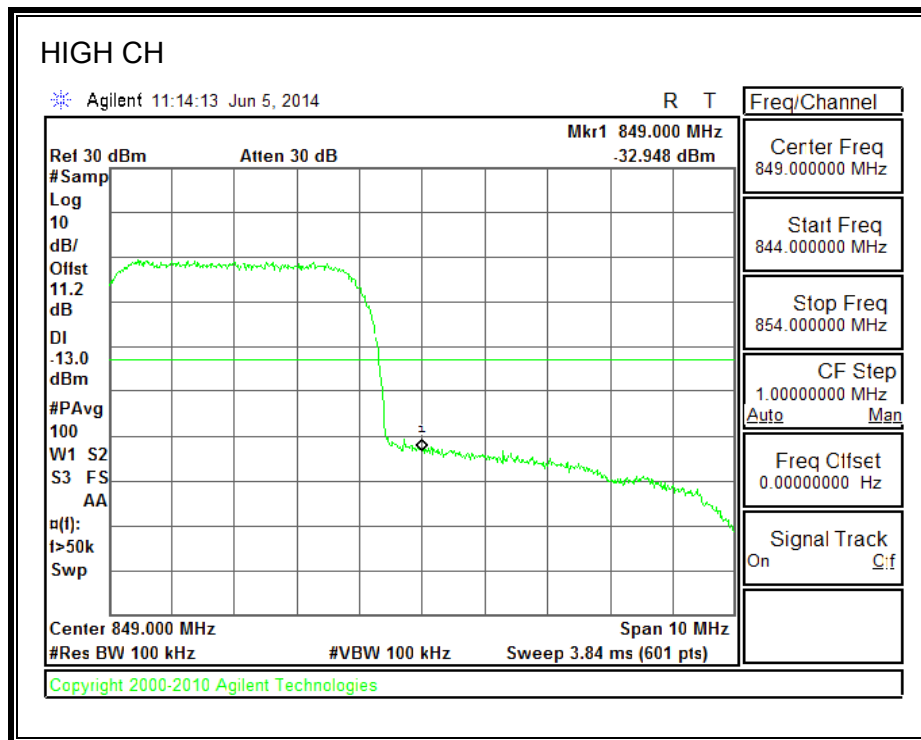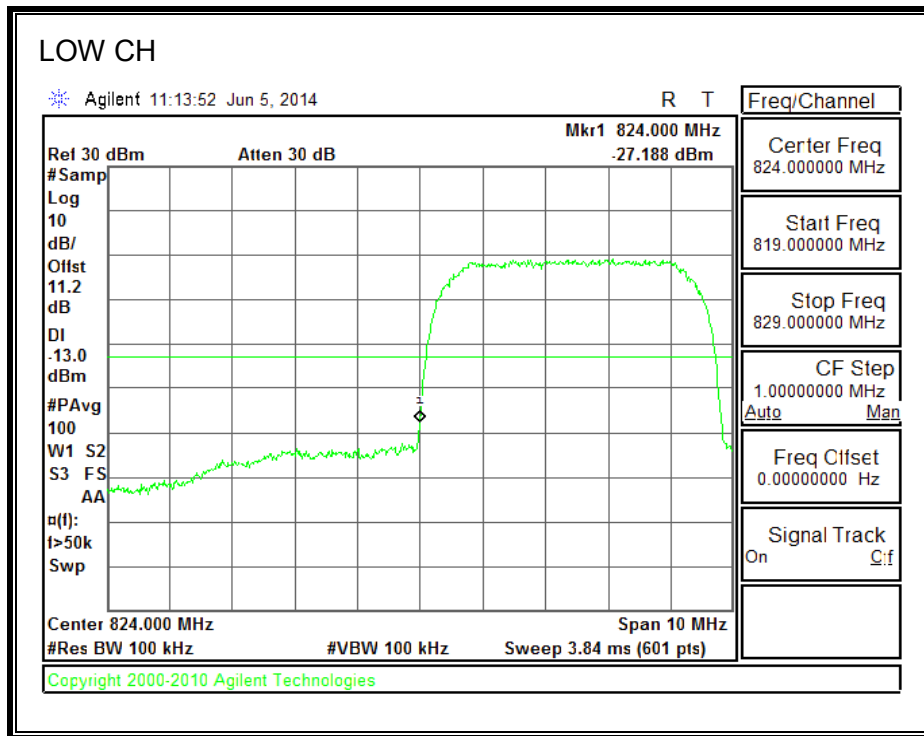

1900MHz BAND

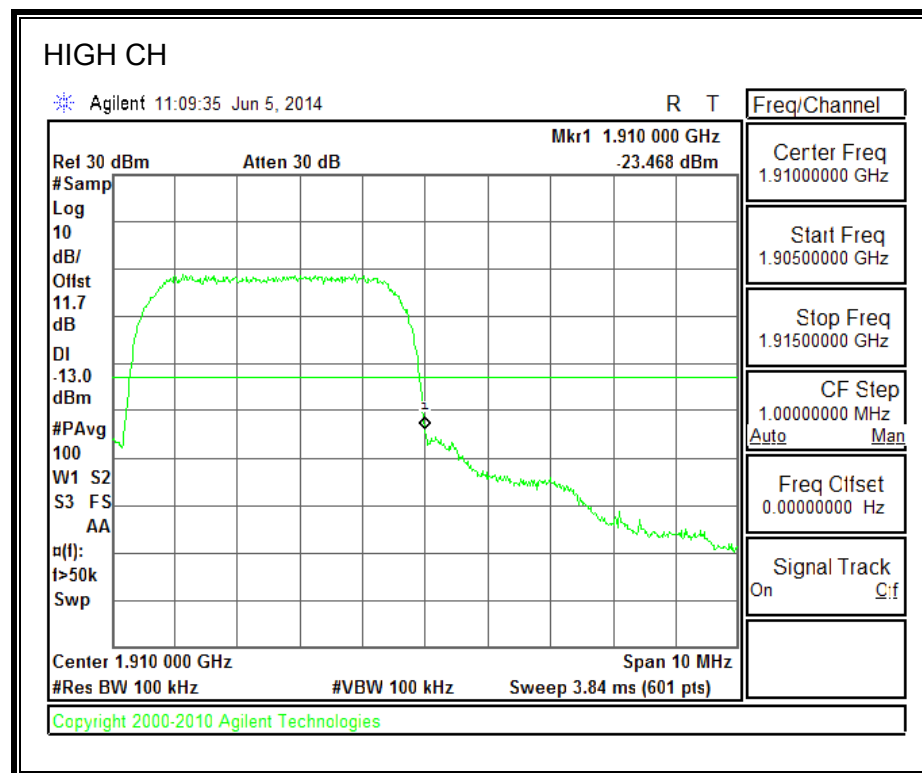
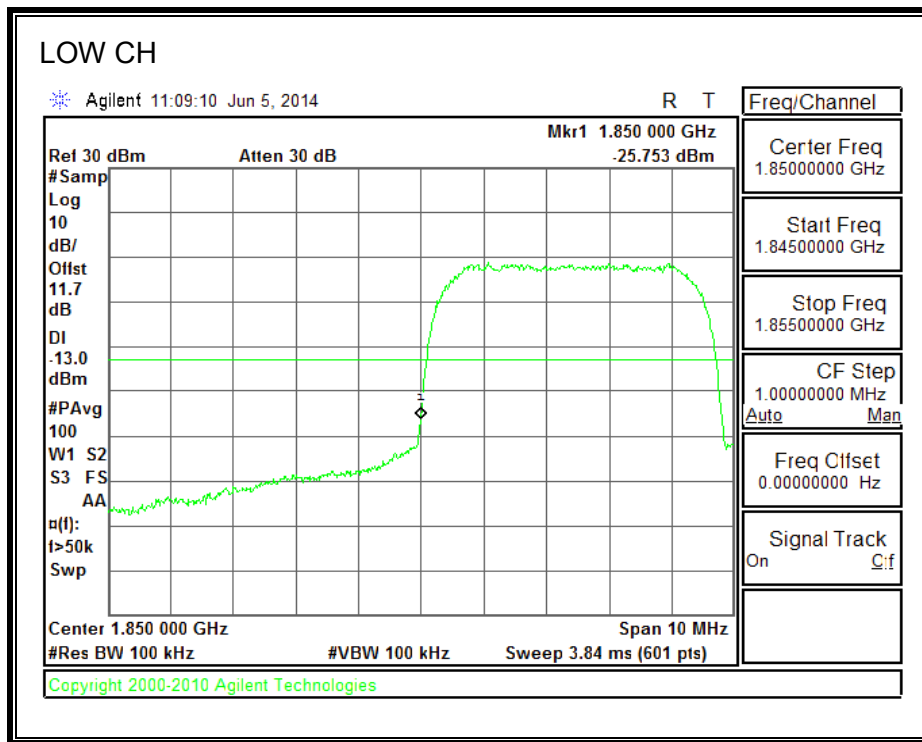




1700MHz BAND

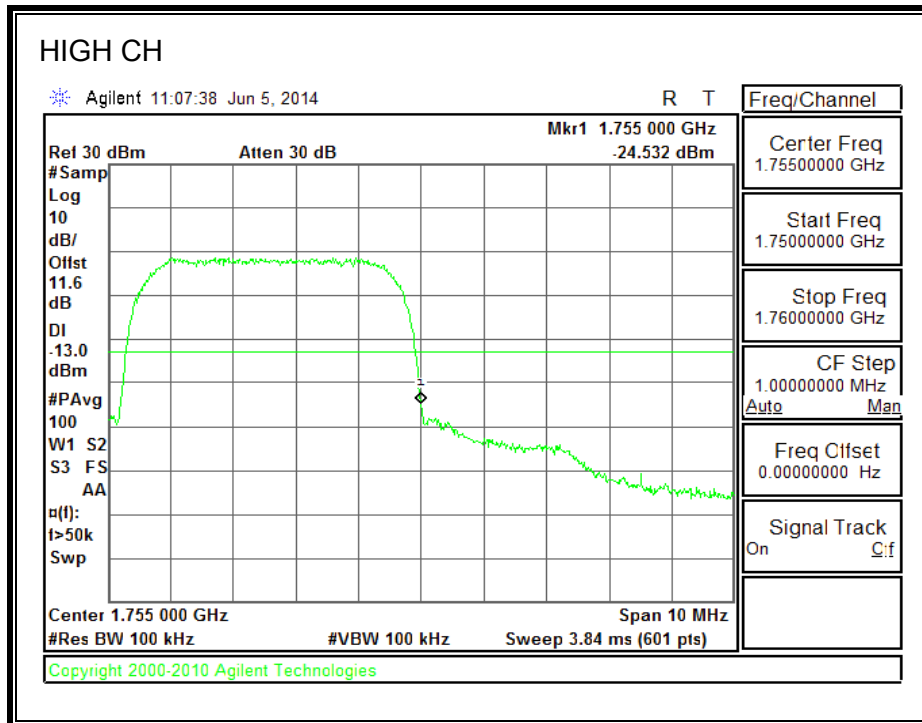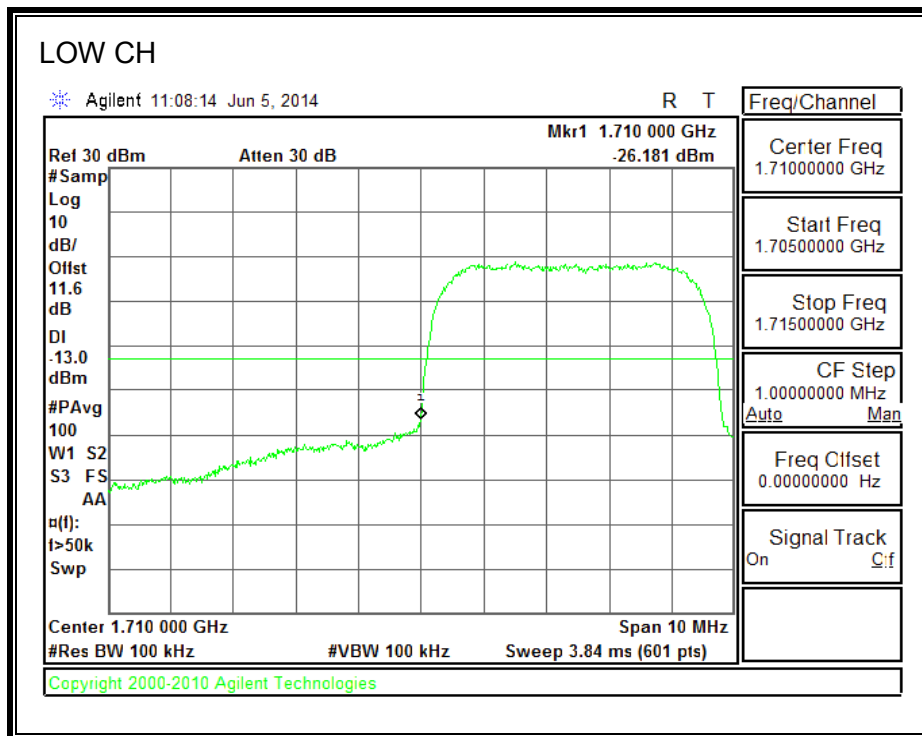



8.2.5. CDMA2000 1xRTT

850MHz BAND

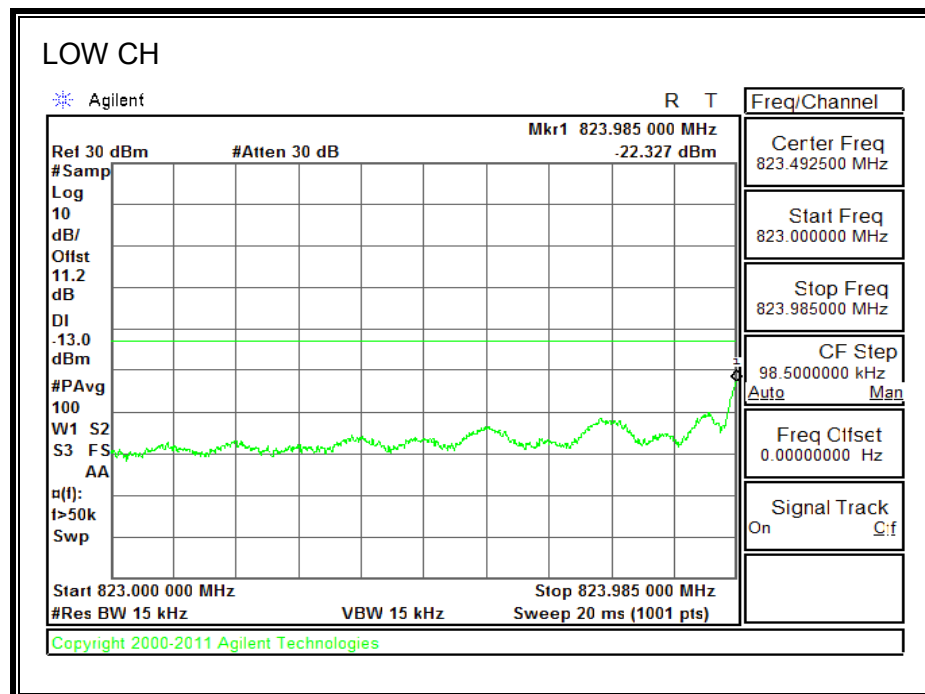
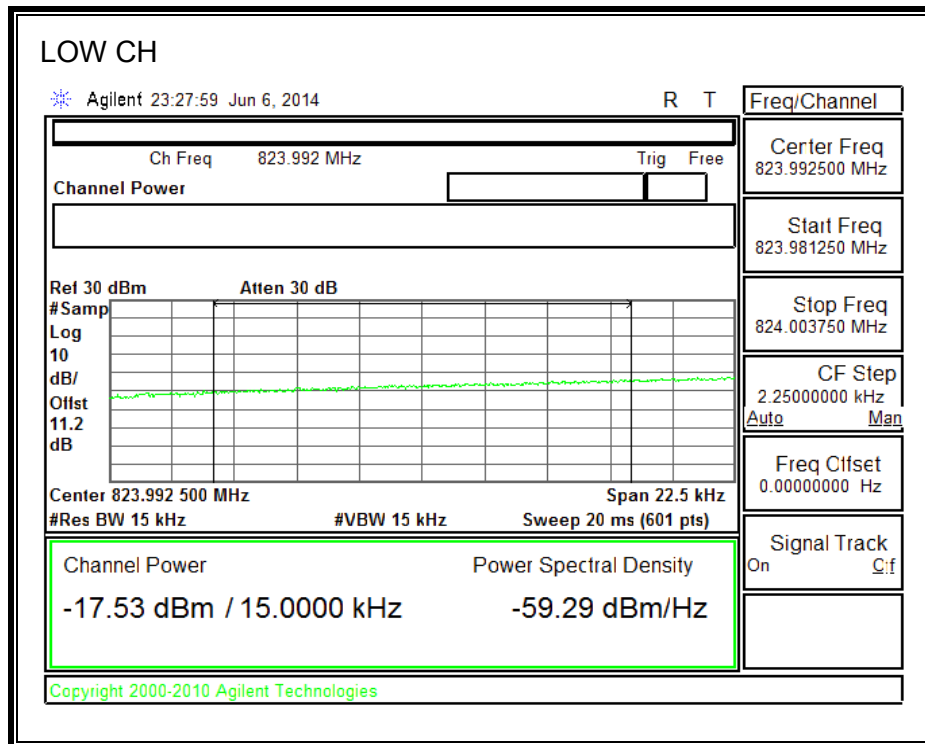


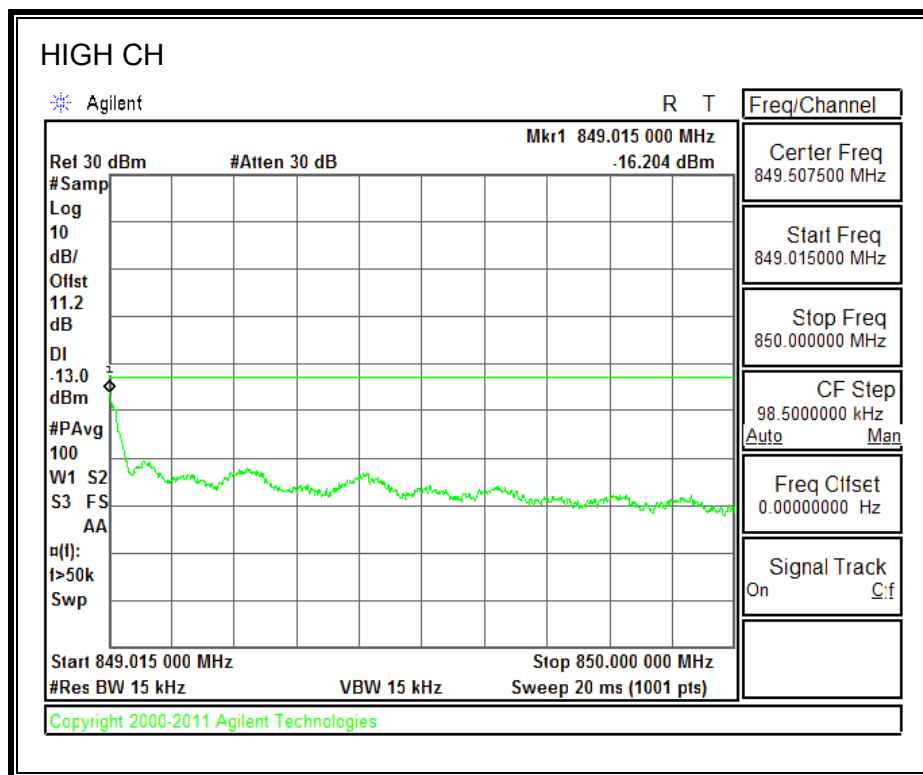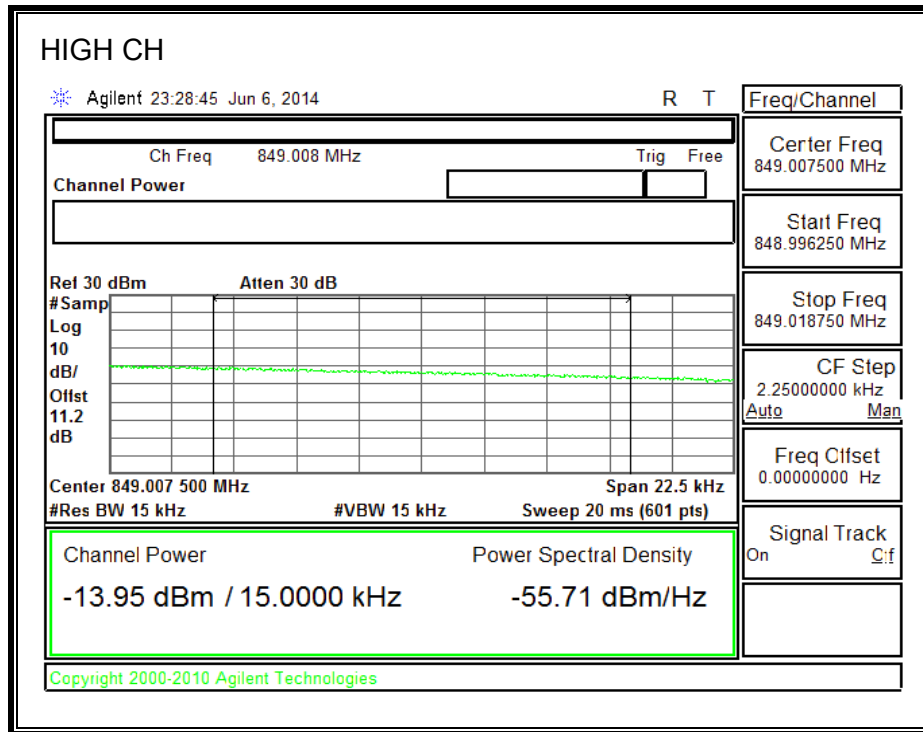



1900MHz BAND

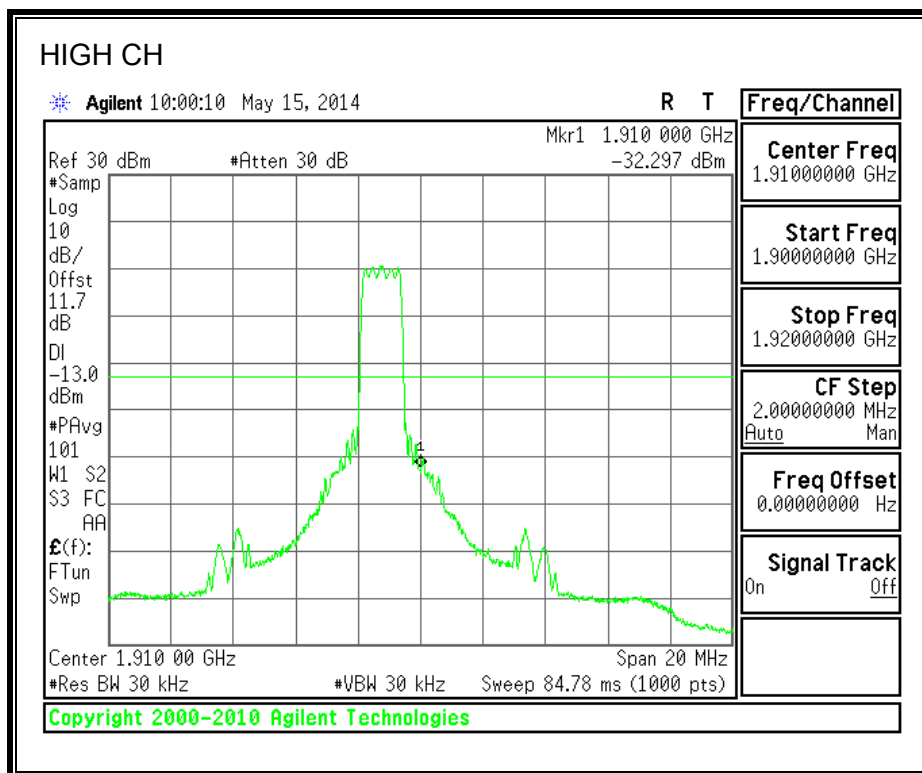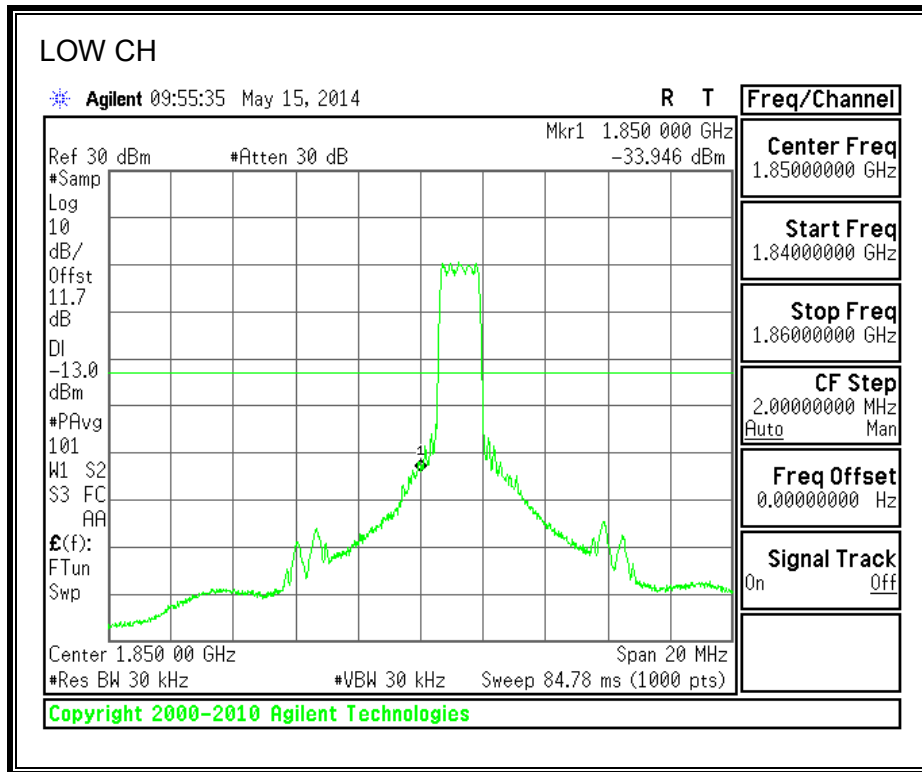


1700MHz BAND

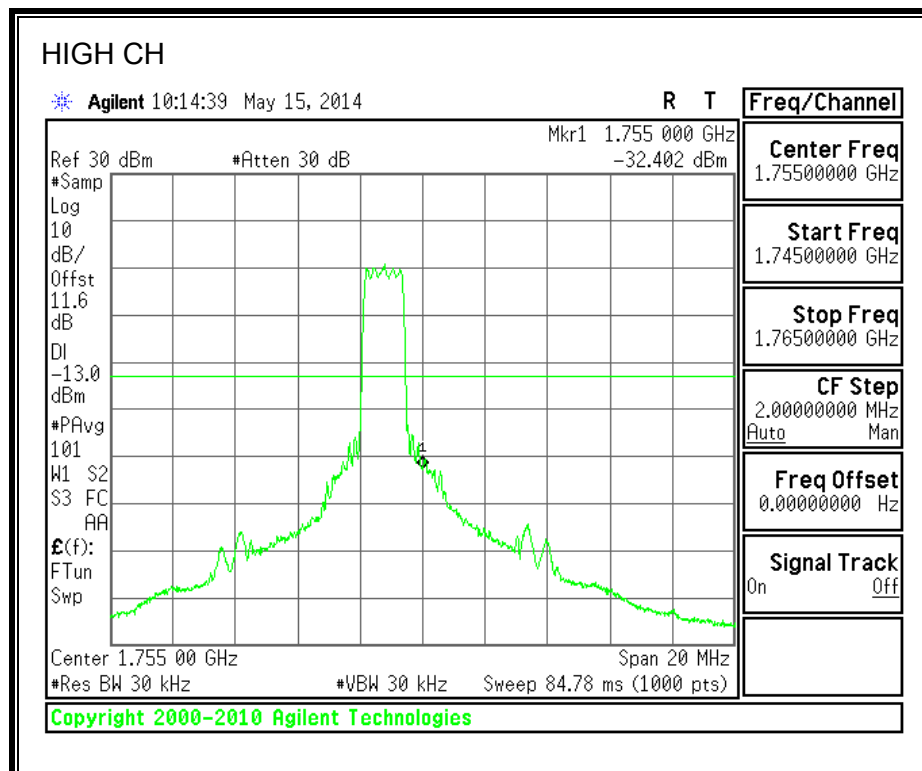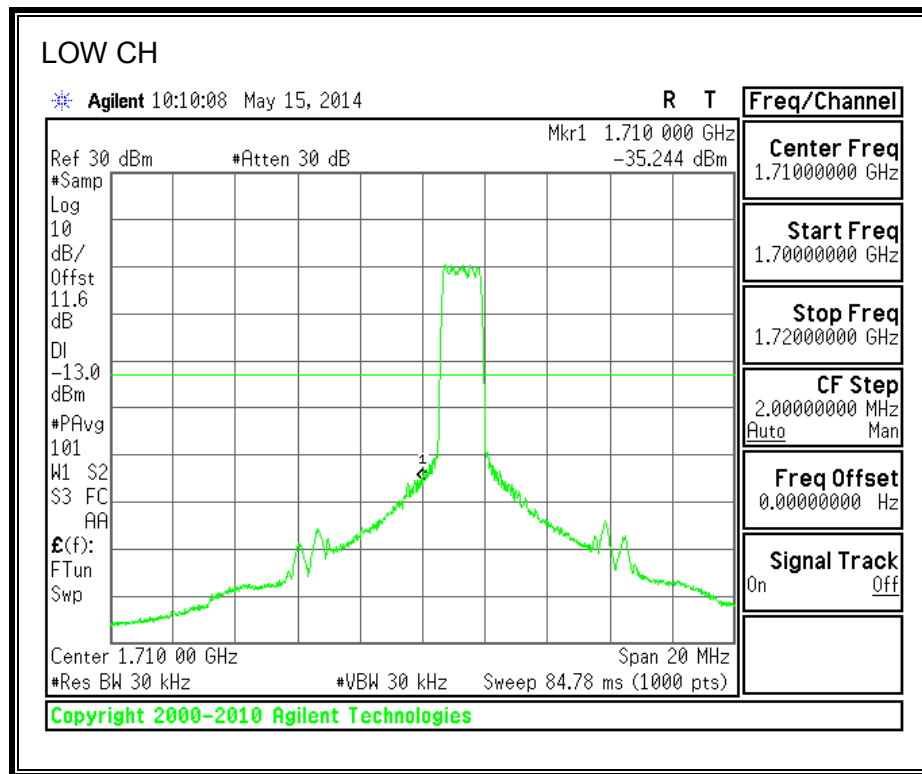


800MHz SECONDARY BAND

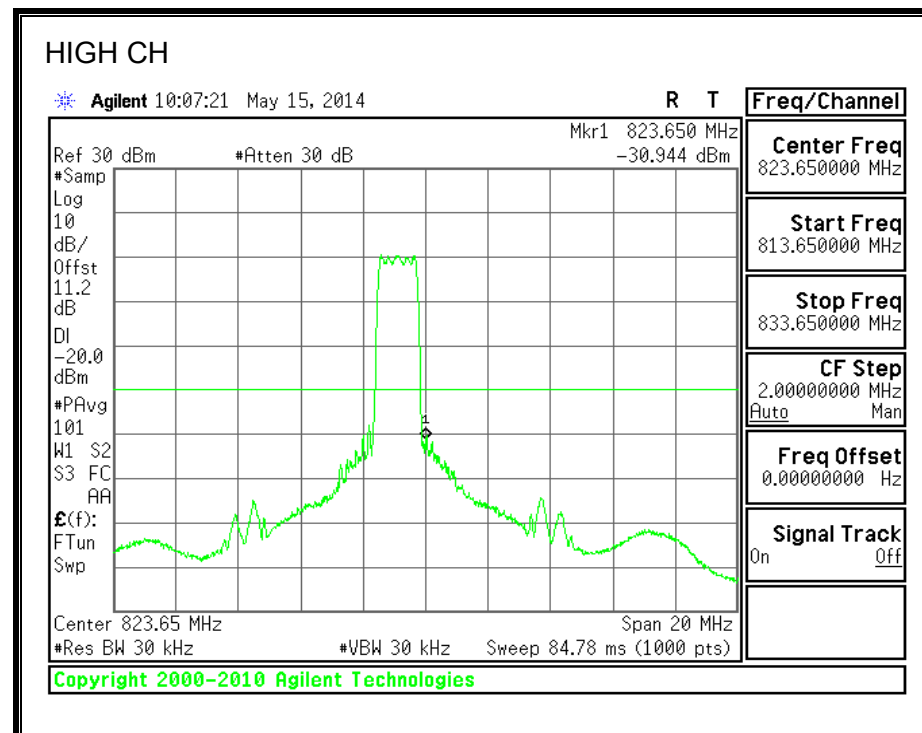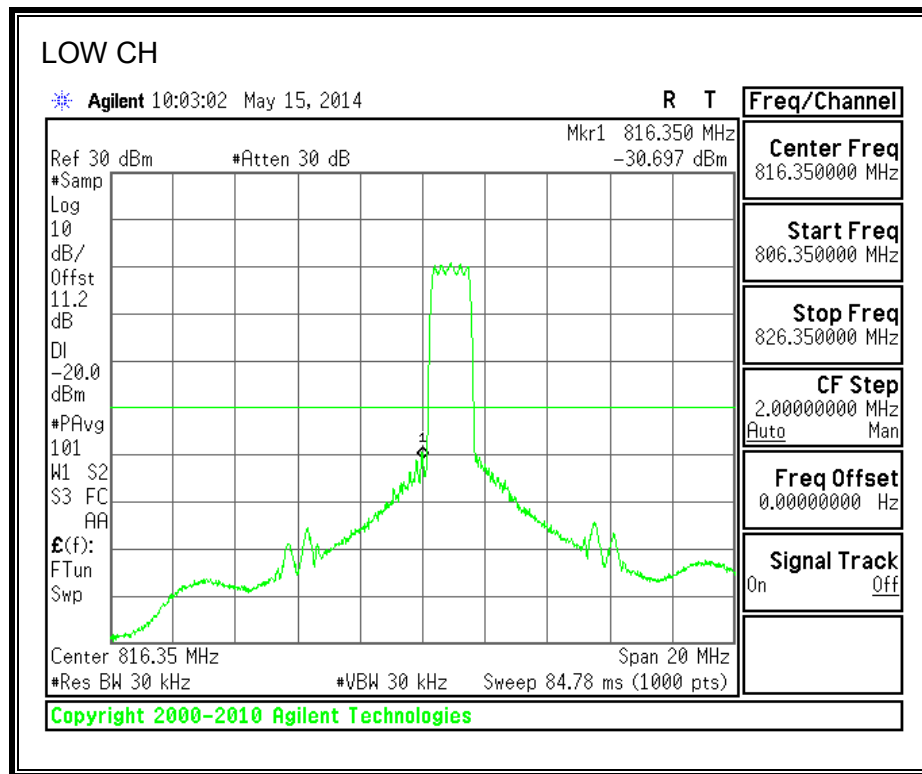


8.2.6. CDMA2000 1xRTT BC10 MASK

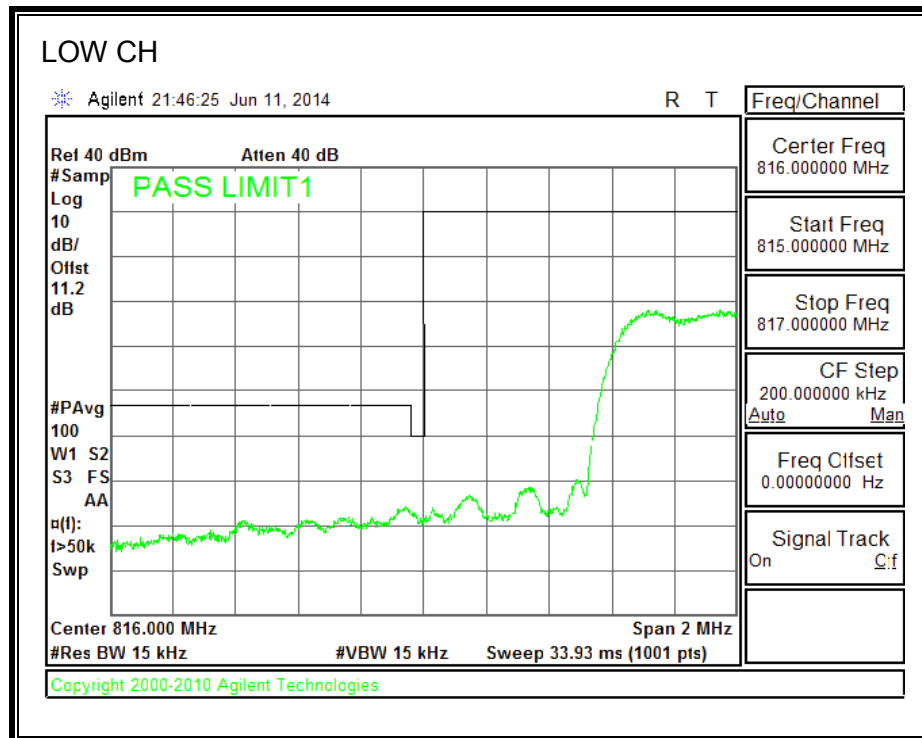


Note: RBW=1% of EBW

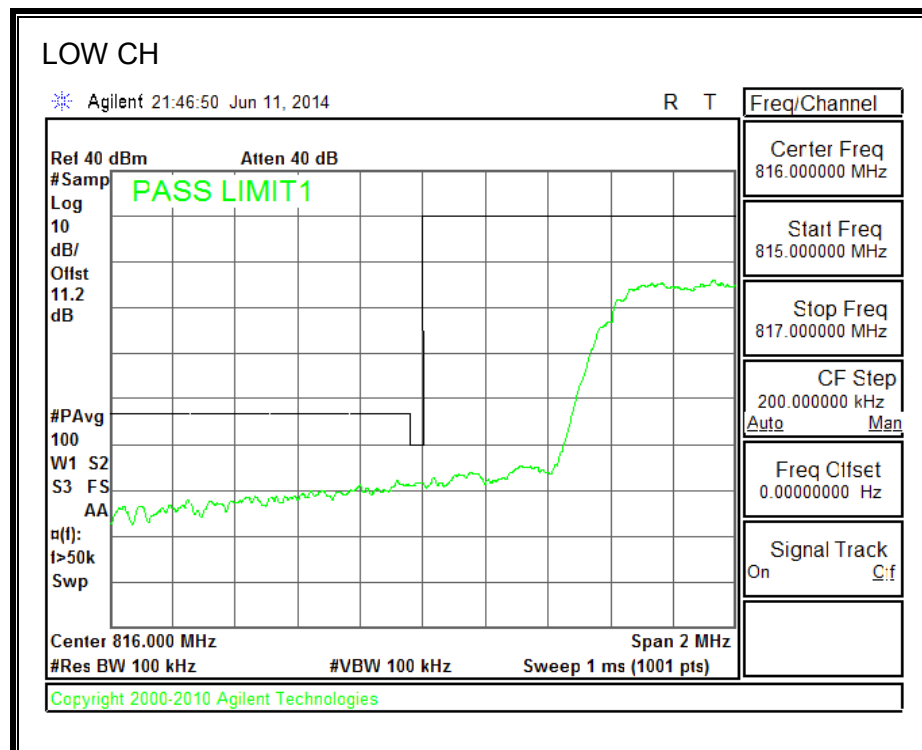

Note: RBW of 1% of 37.5KHz of outer channel frequency block

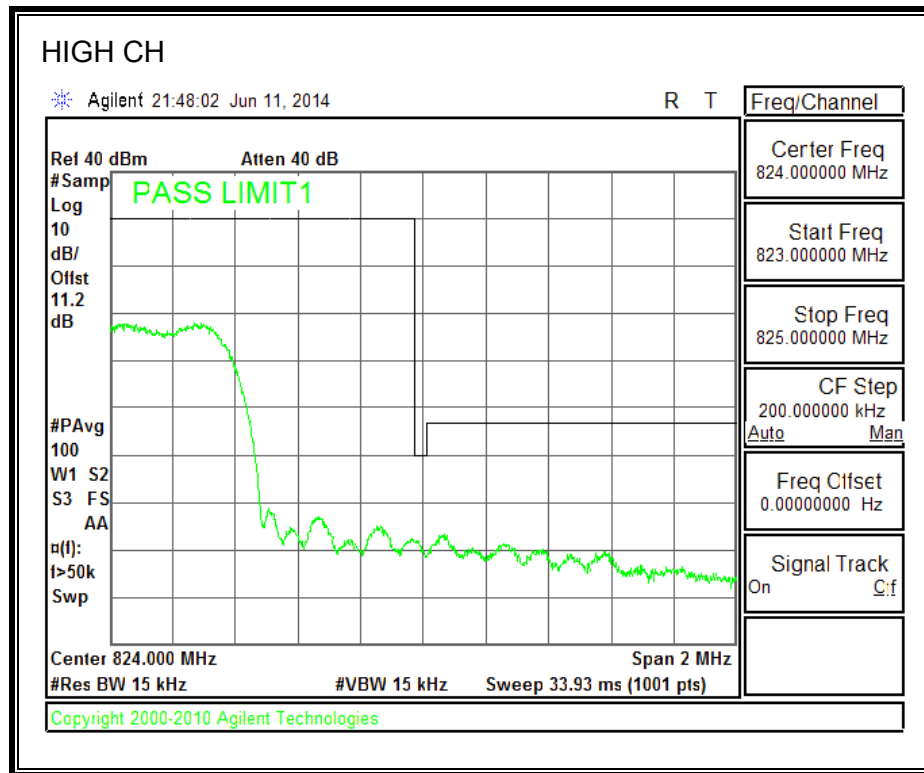



Note: RBW=1% of EBW


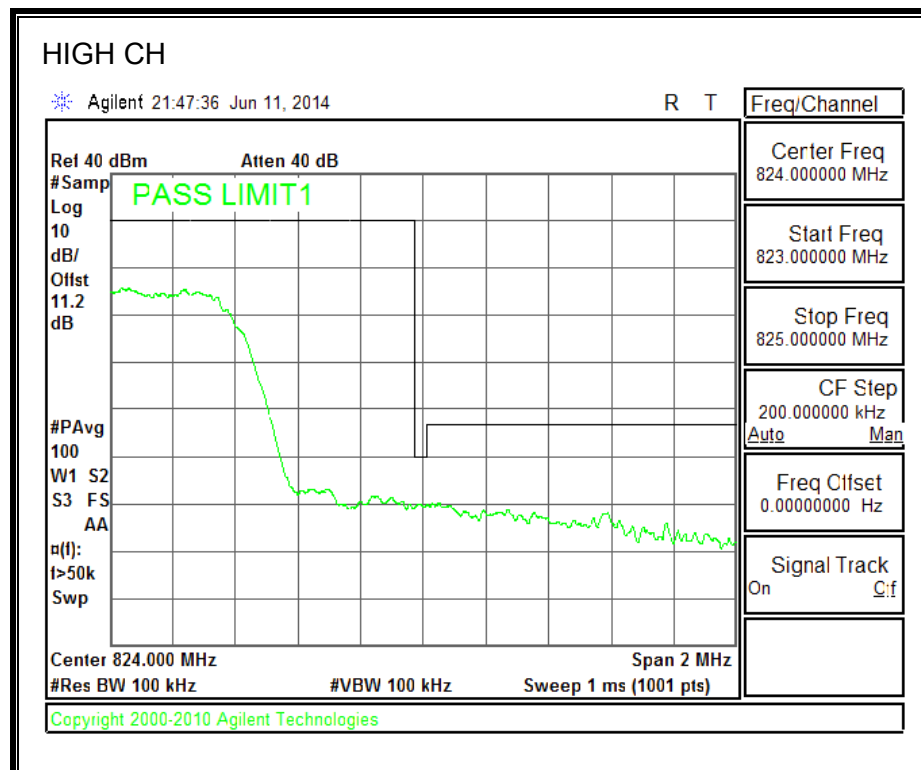


Note: RBW of 1% of 37.5KHz of outer channel frequency block



8.2.7. CDMA2000 EVDO Rev. A

850MHz BAND

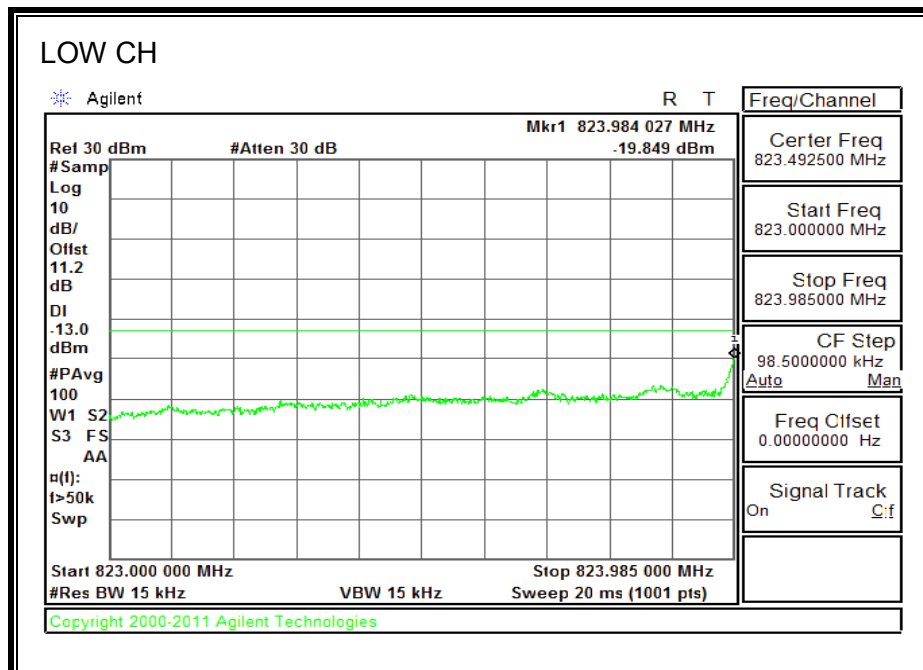
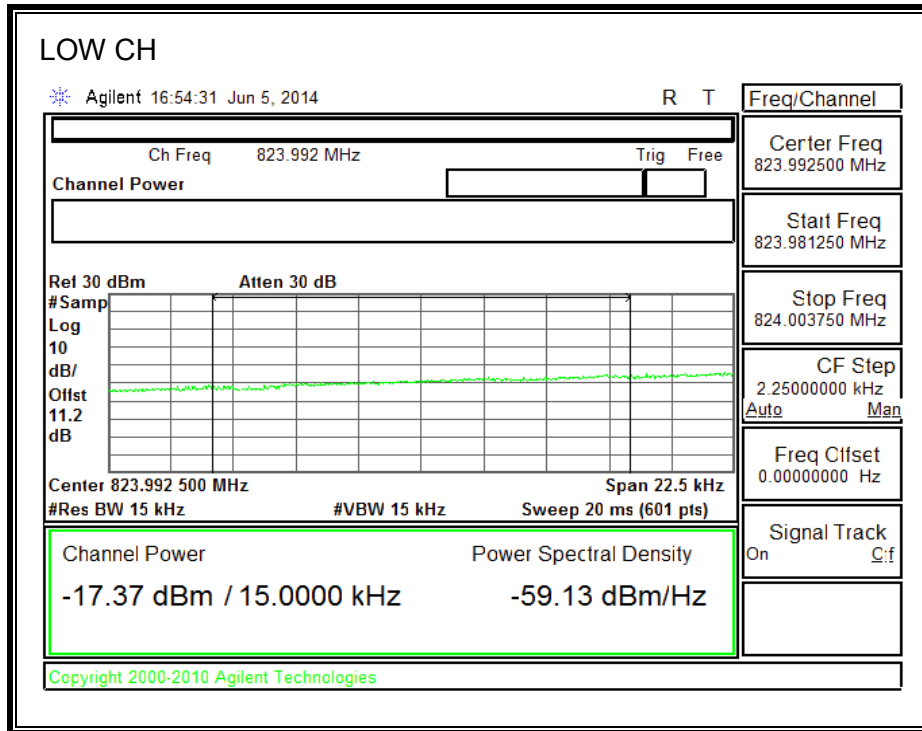


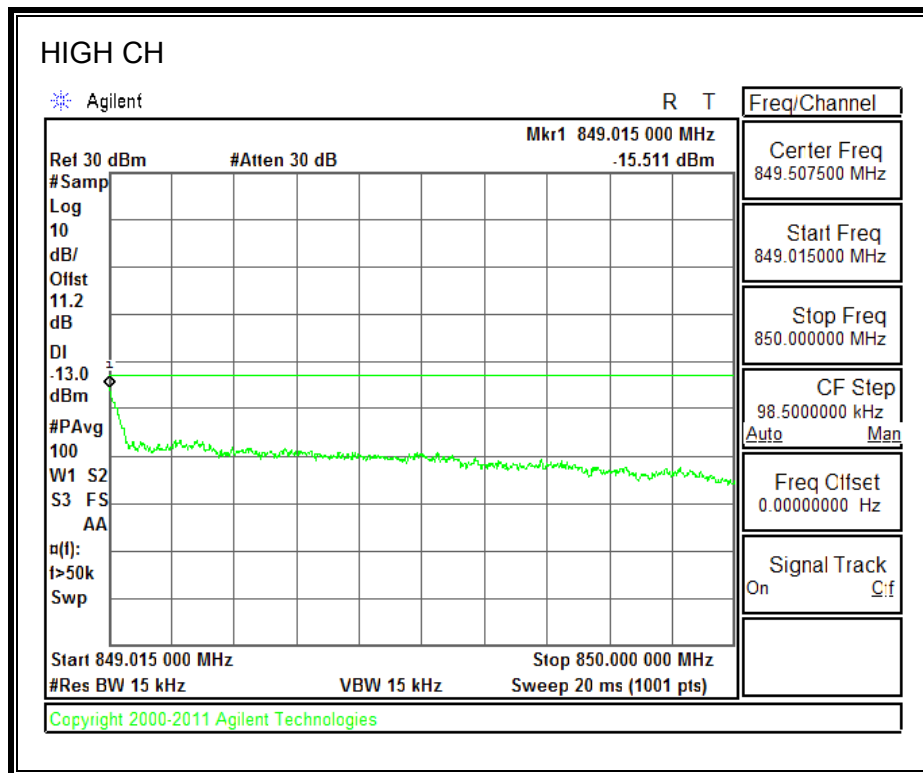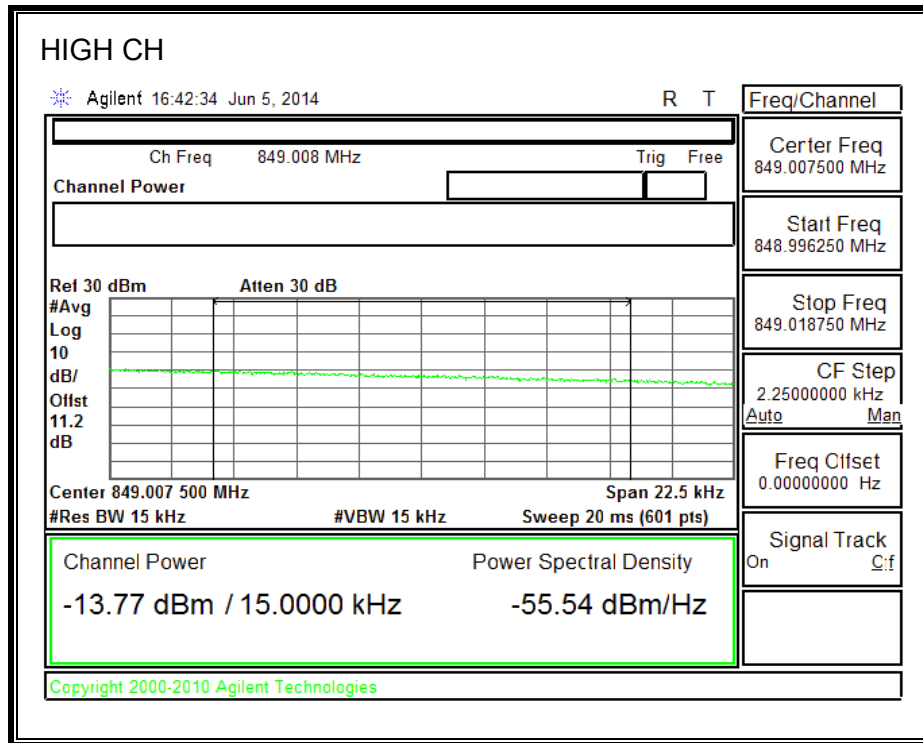



1900MHz BAND

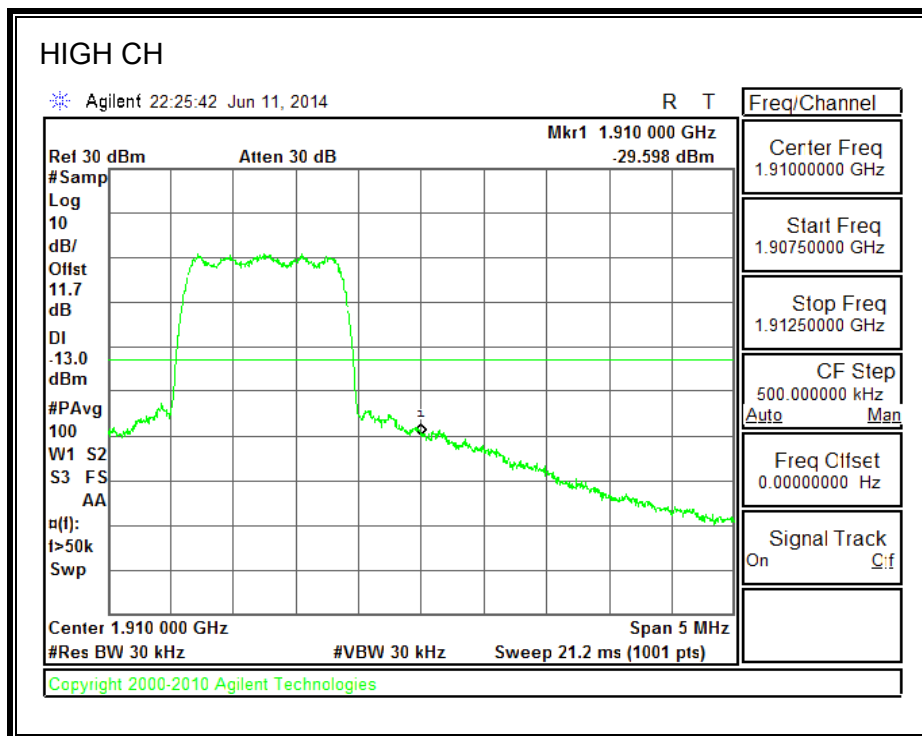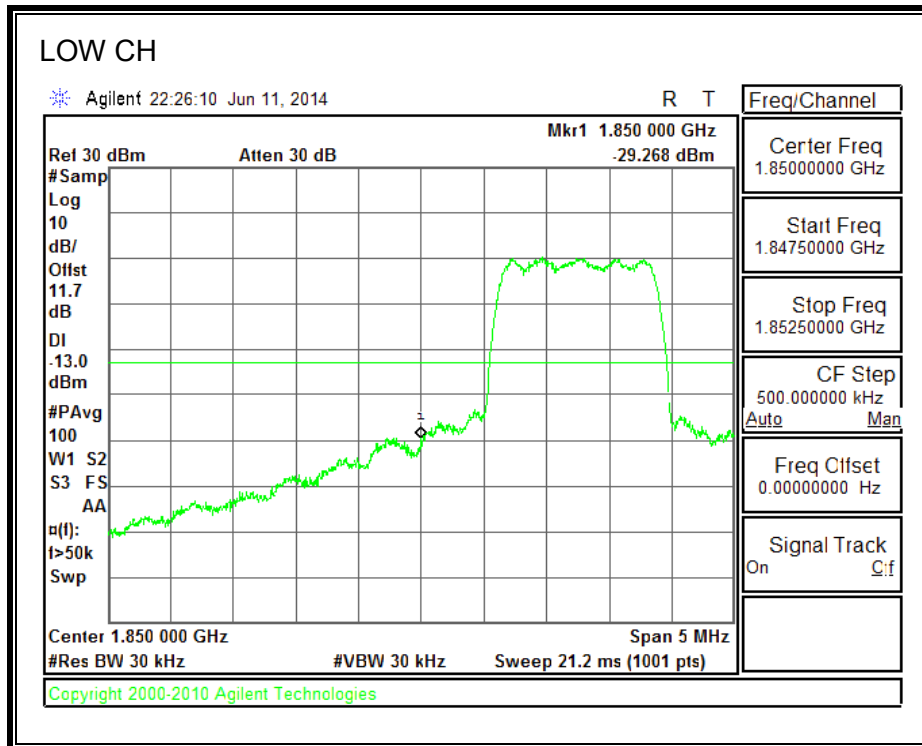


1700MHz BAND

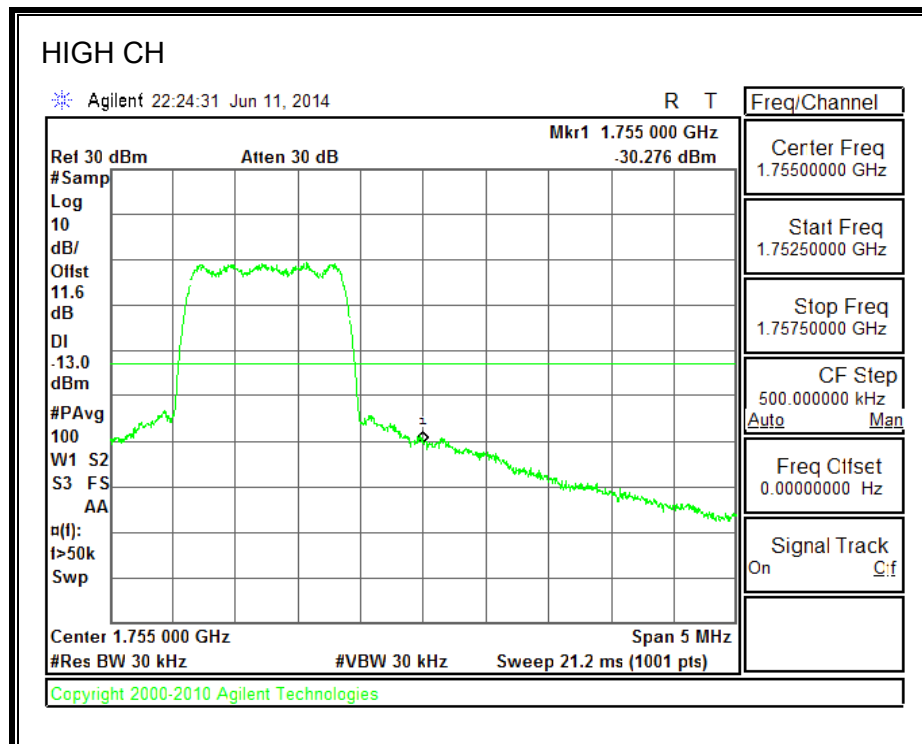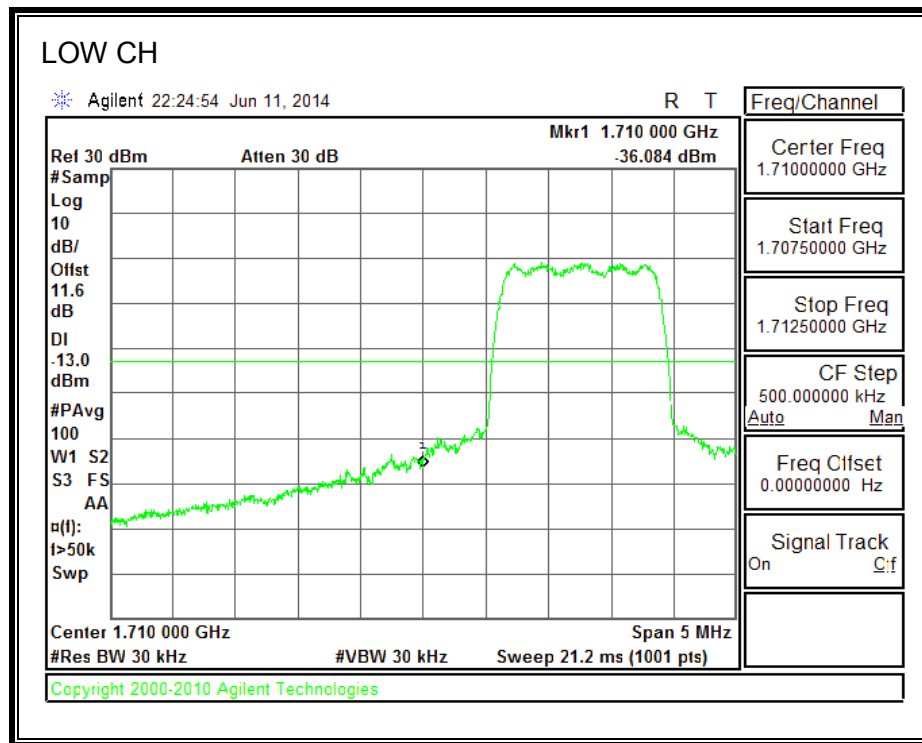


800MHz SECONDARY BAND

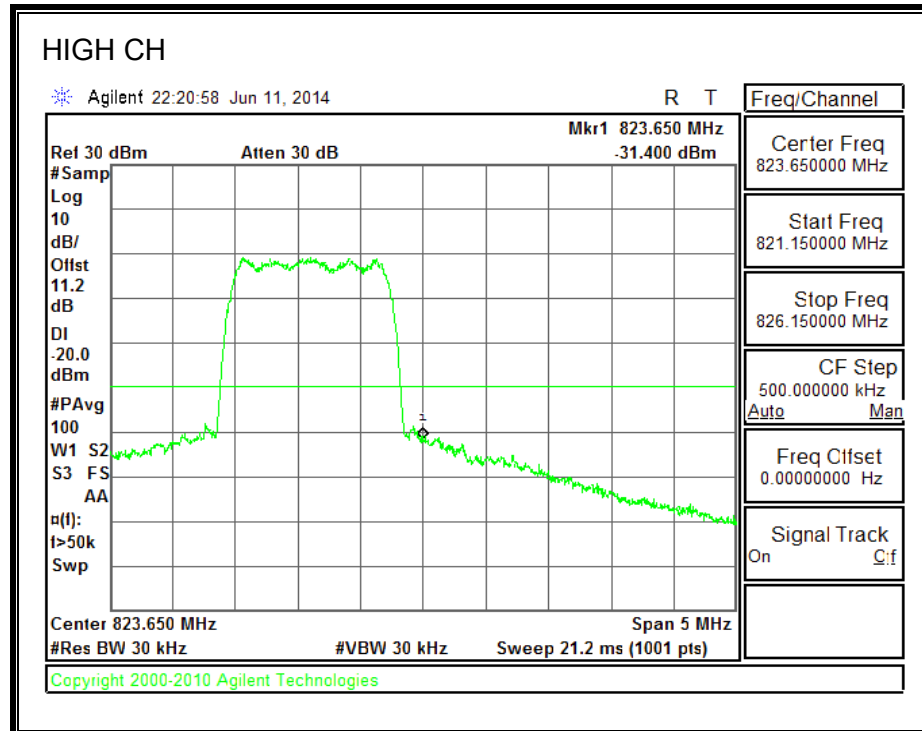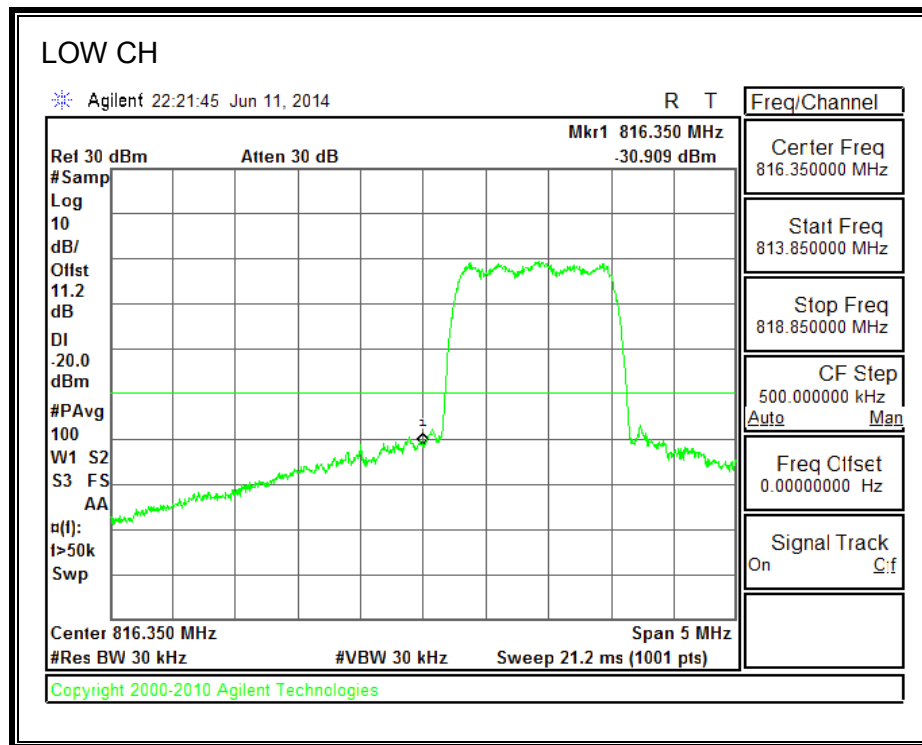


8.2.8. CDMA2000 EVDO REVA BC10 MASK

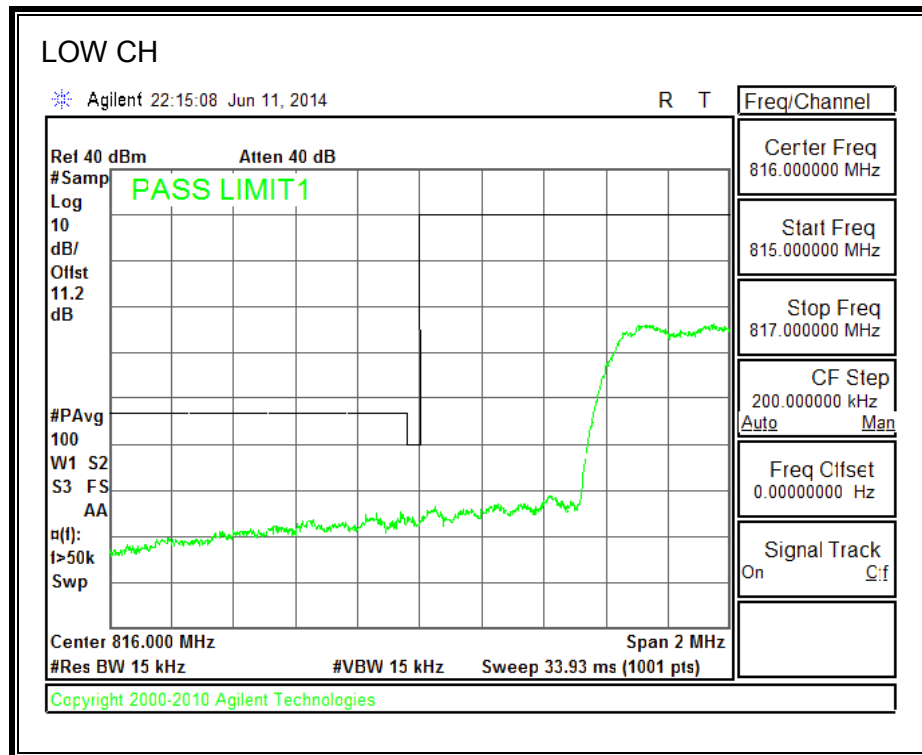


Note: RBW=1% of EBW

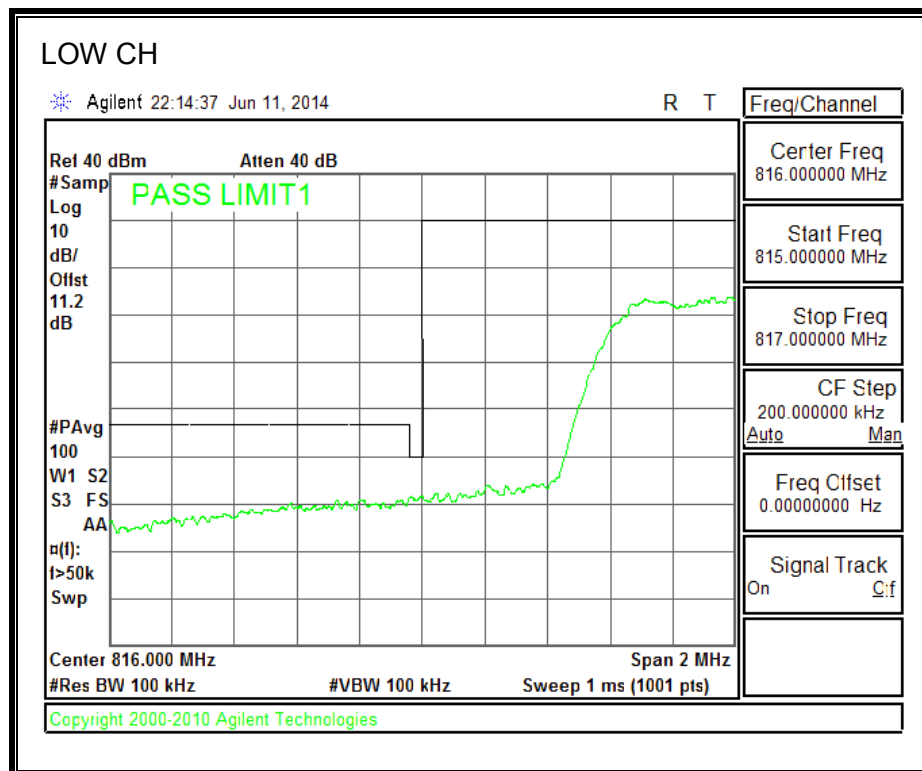

Note: RBW of 1% of 37.5KHz of outer channel frequency block

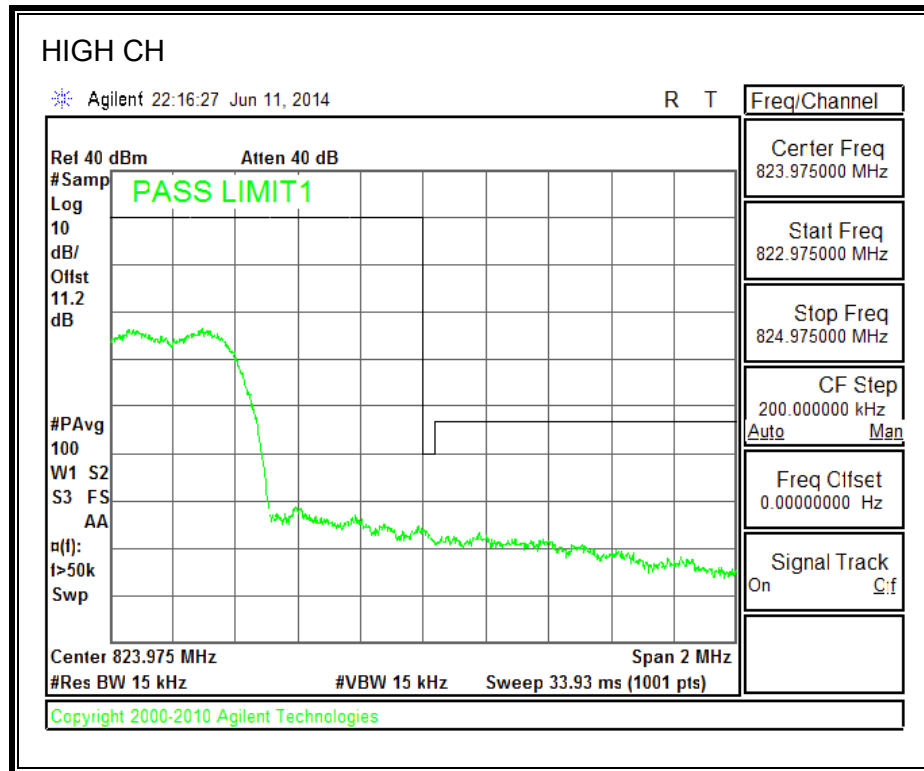

Note: RBW=1% of EBW

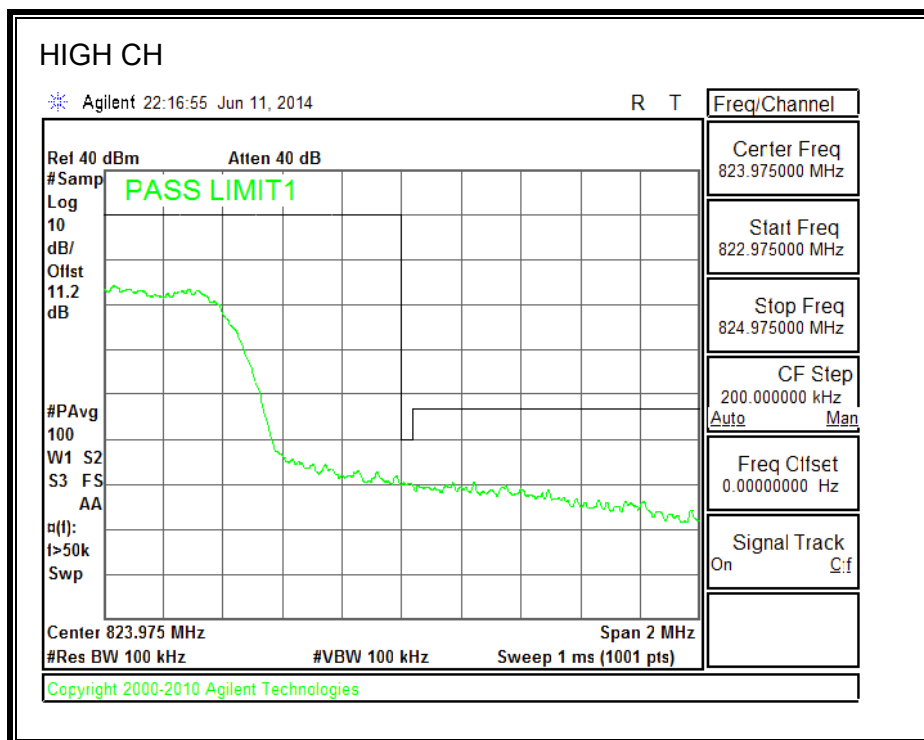

Note: RBW of 1% of 37.5KHz of outer channel frequency block

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53 §90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
-



MODES TESTED


- GPRS and EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, BC0, BC1 BC10 and BC15

RESULTS


8.3.1. GSM-GPRS



850MHz BAND

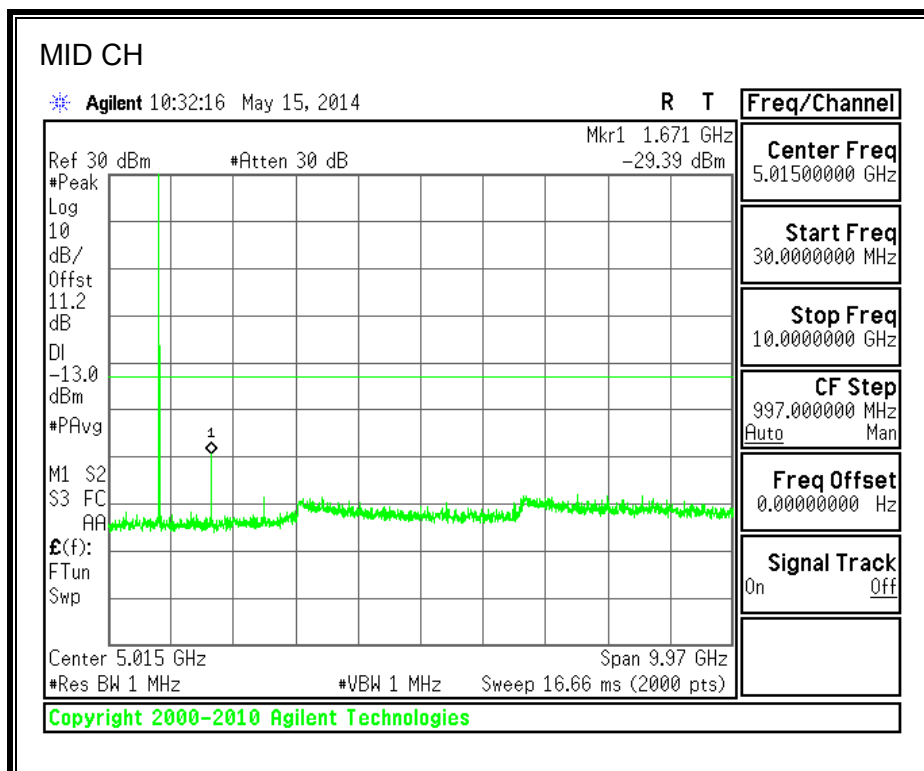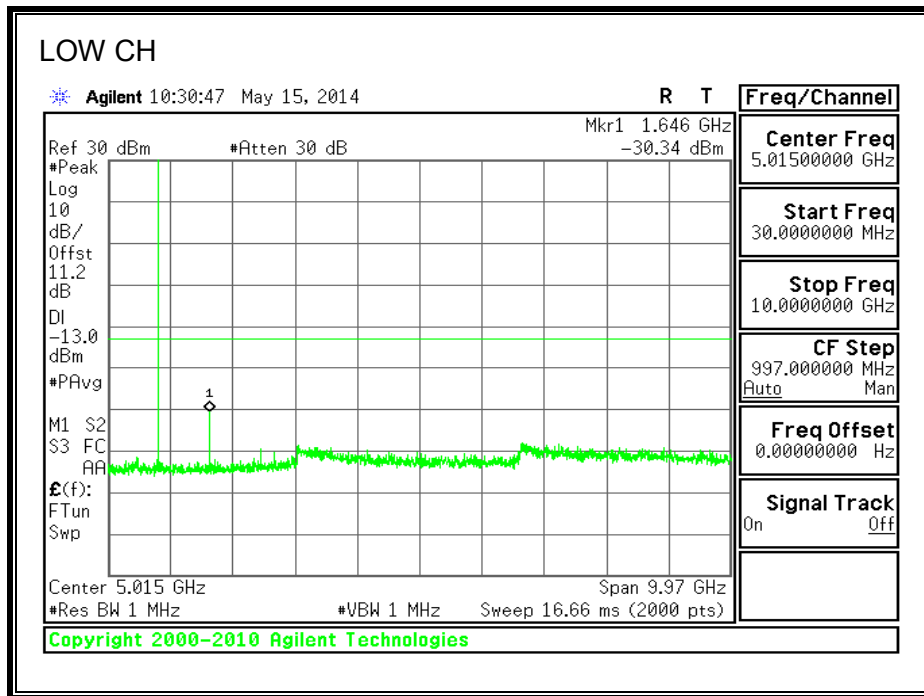

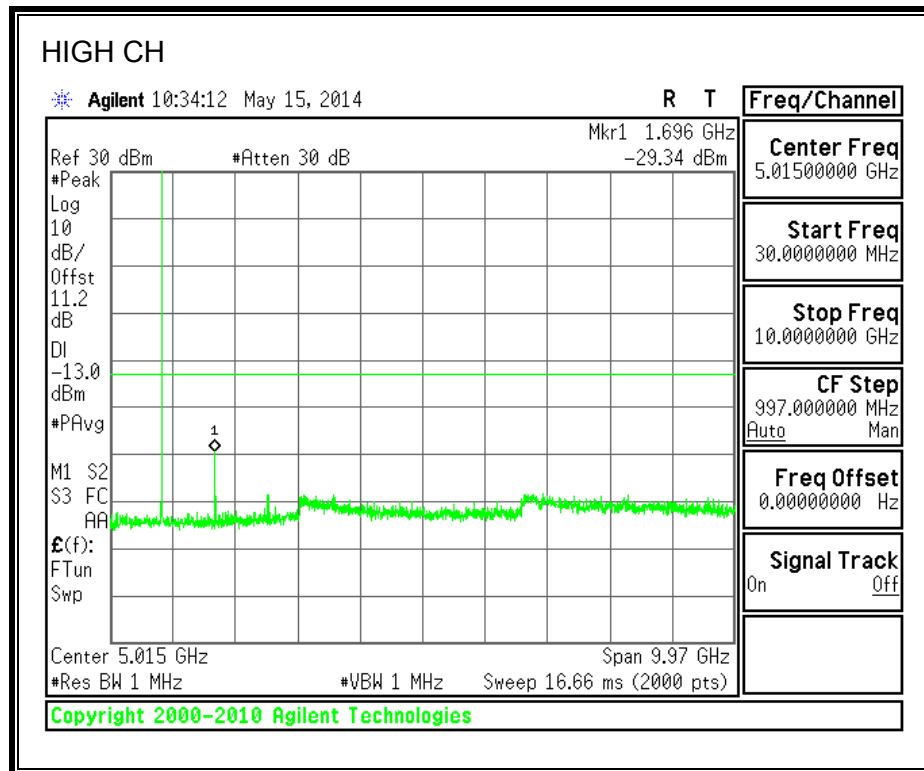



1900MHz BAND

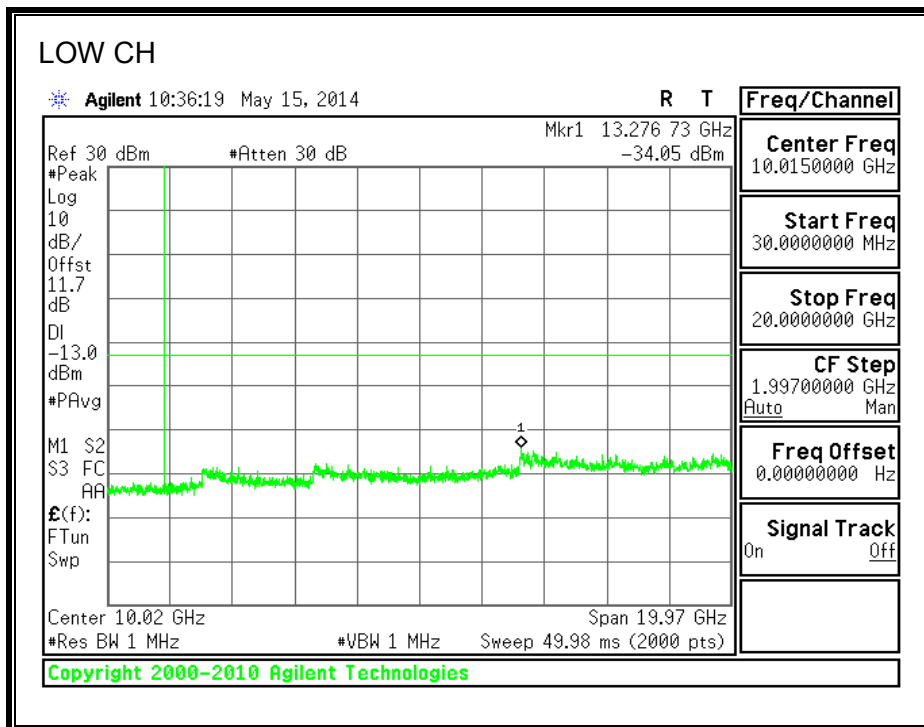

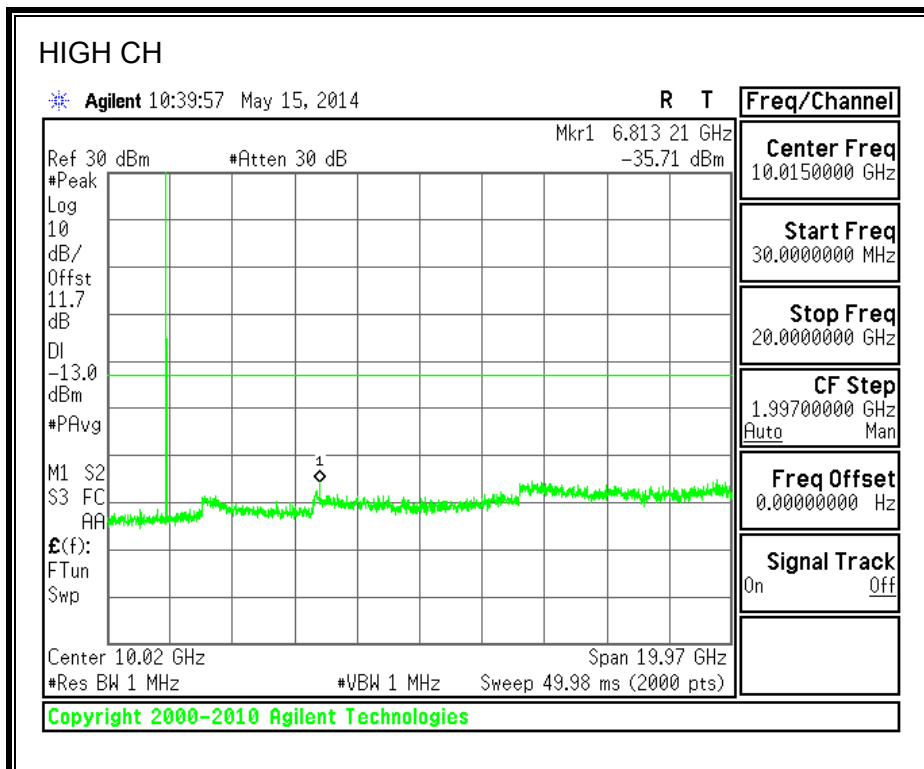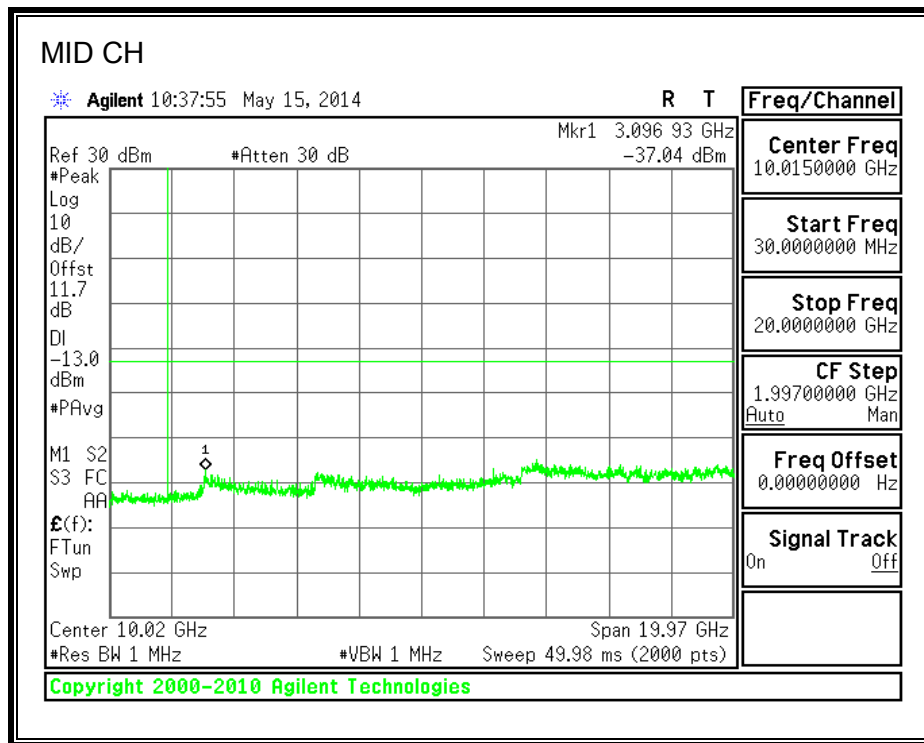




850MHz BAND

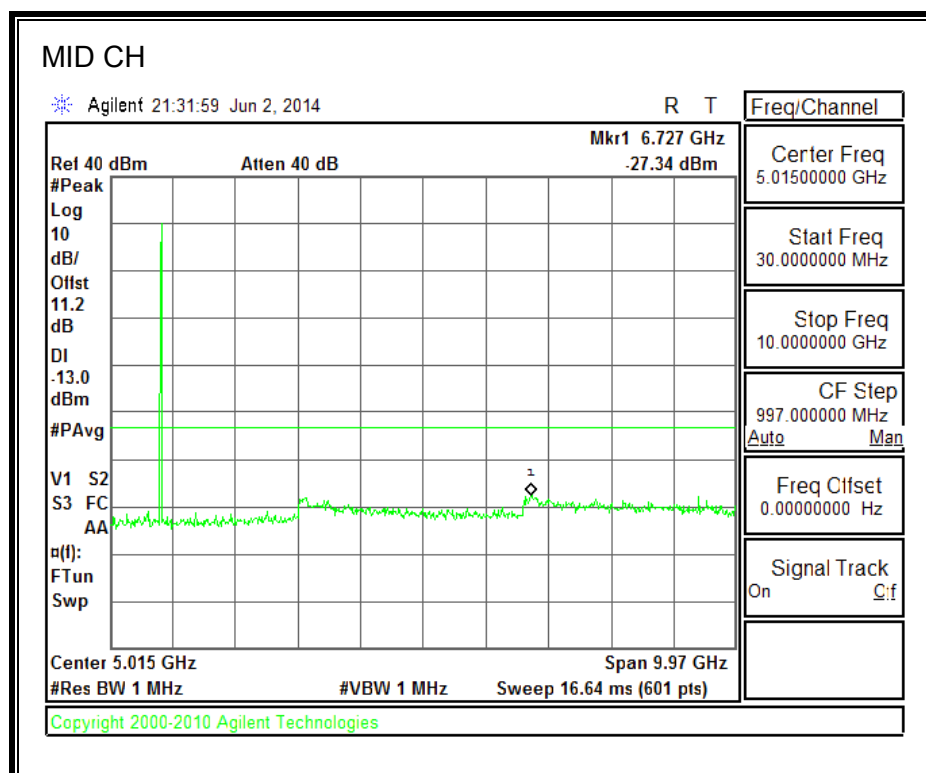

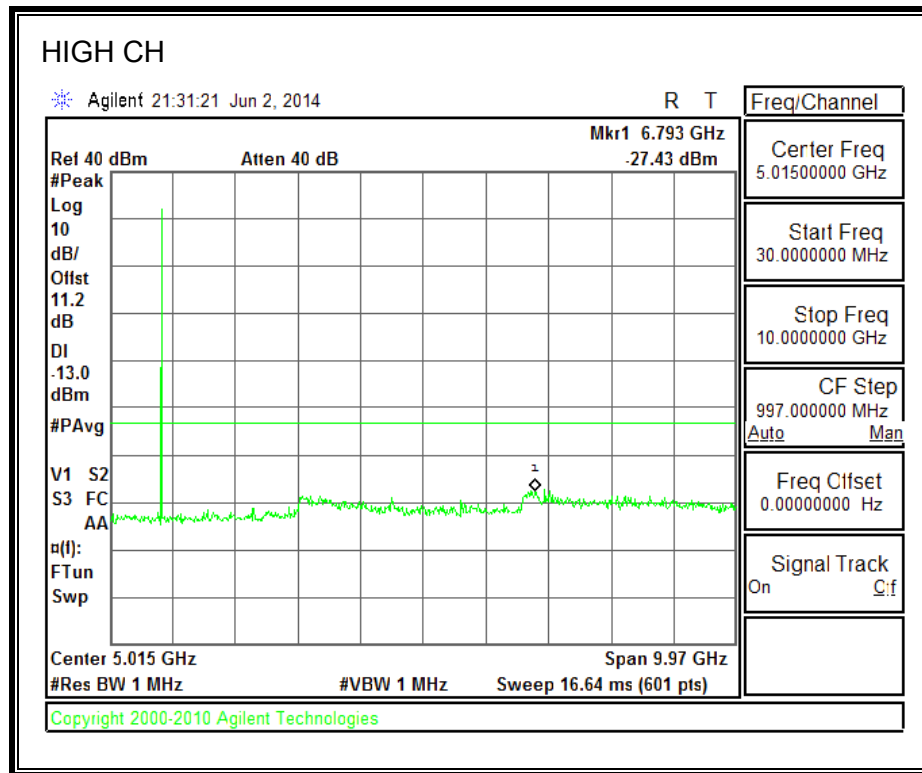



1900MHz BAND

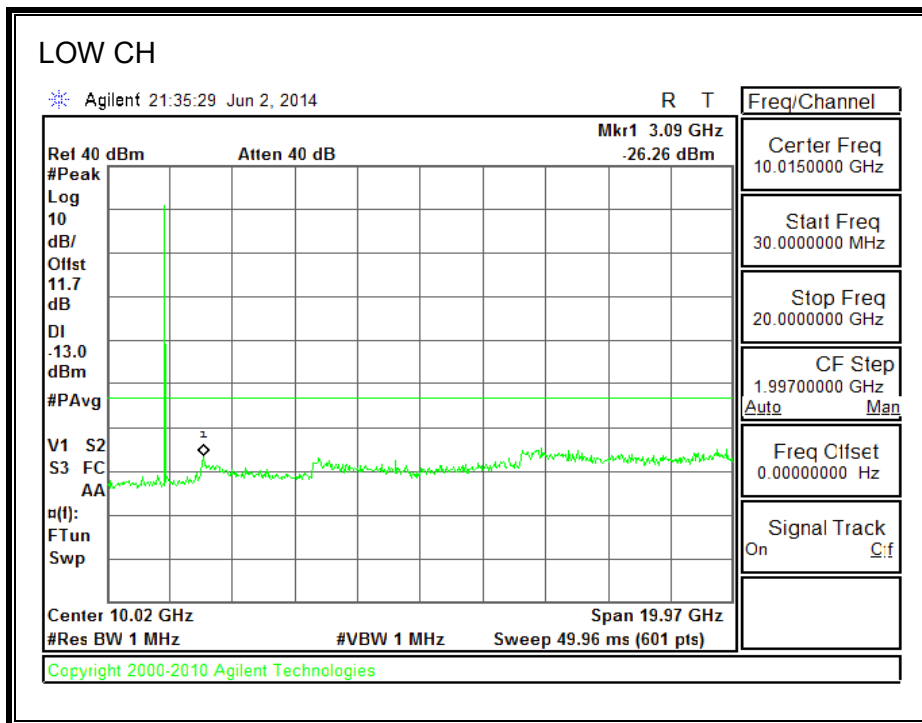


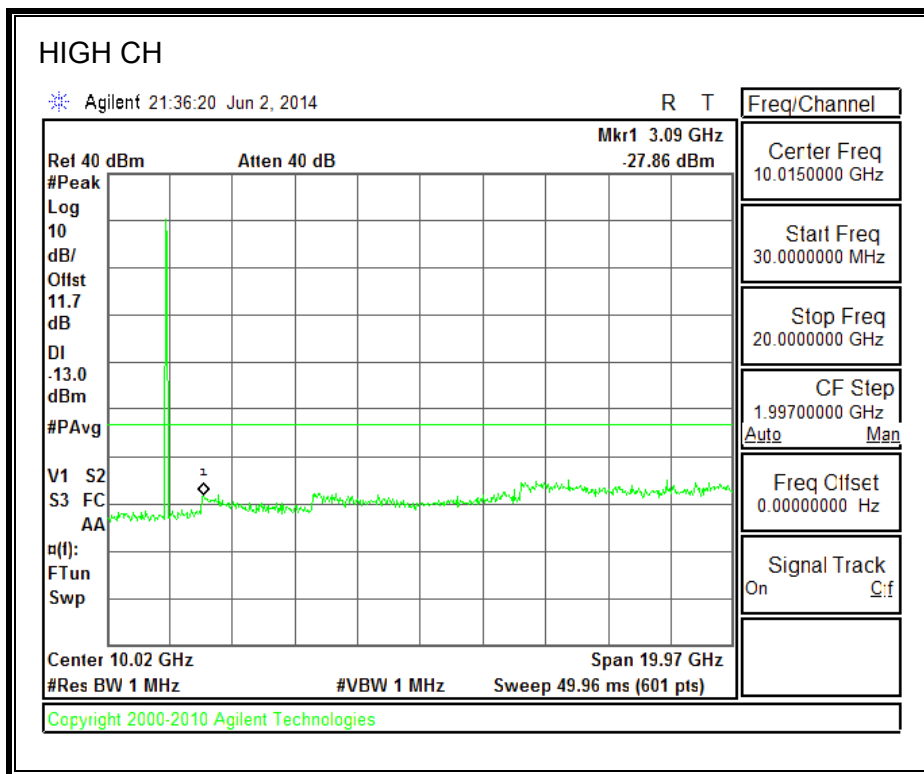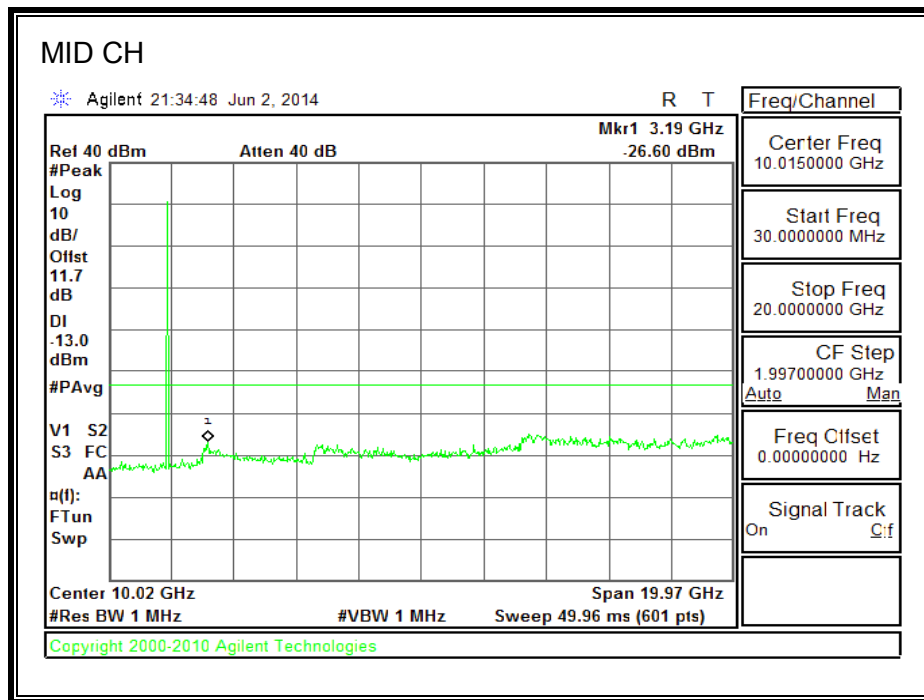


8.3.3. UMTS Rel. 99



850MHz BAND

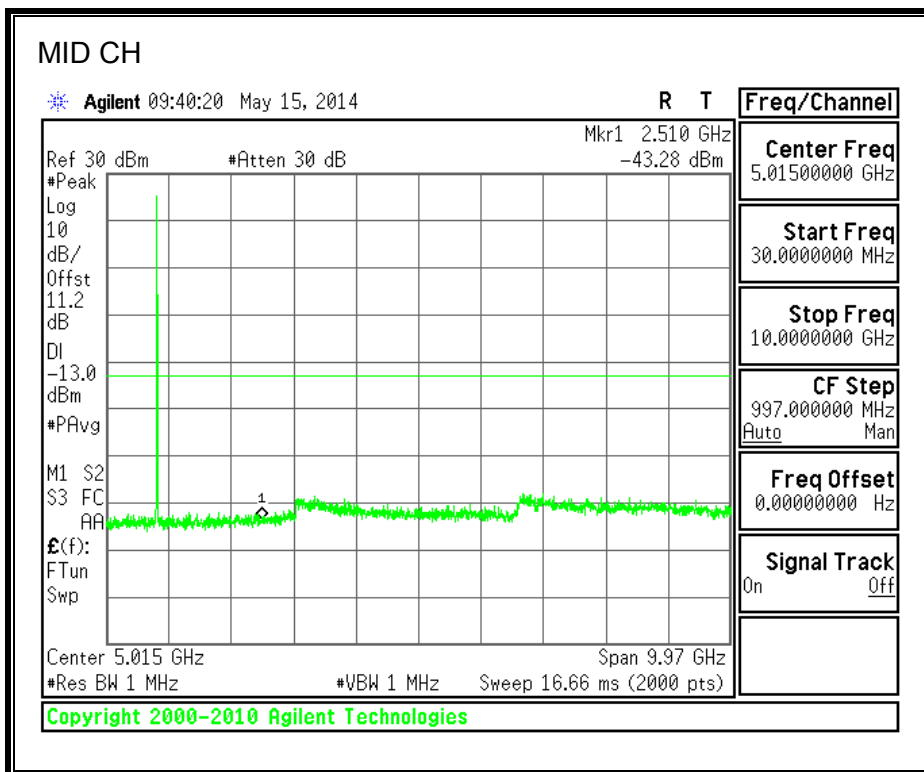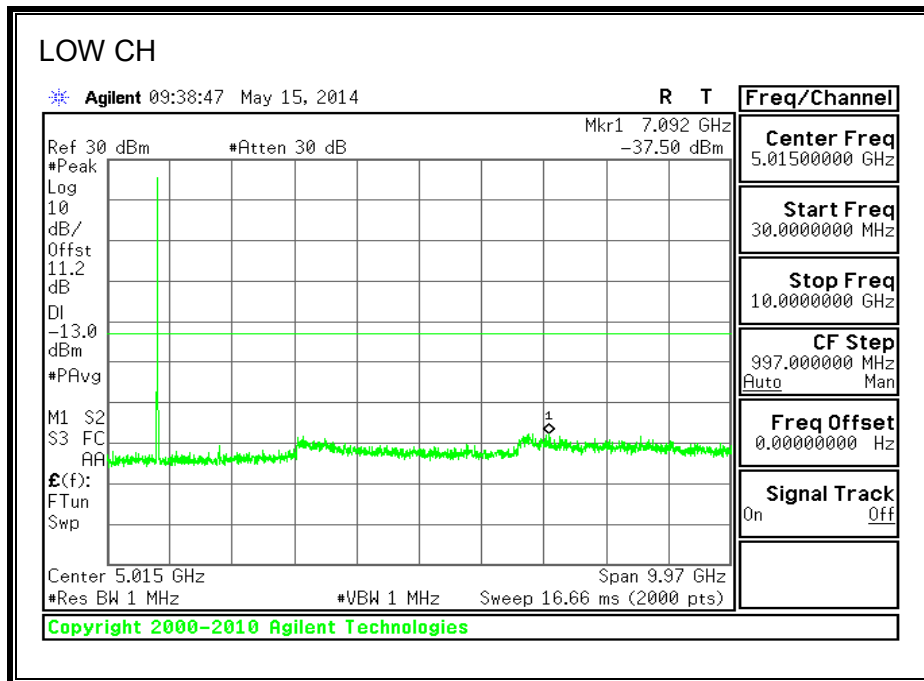


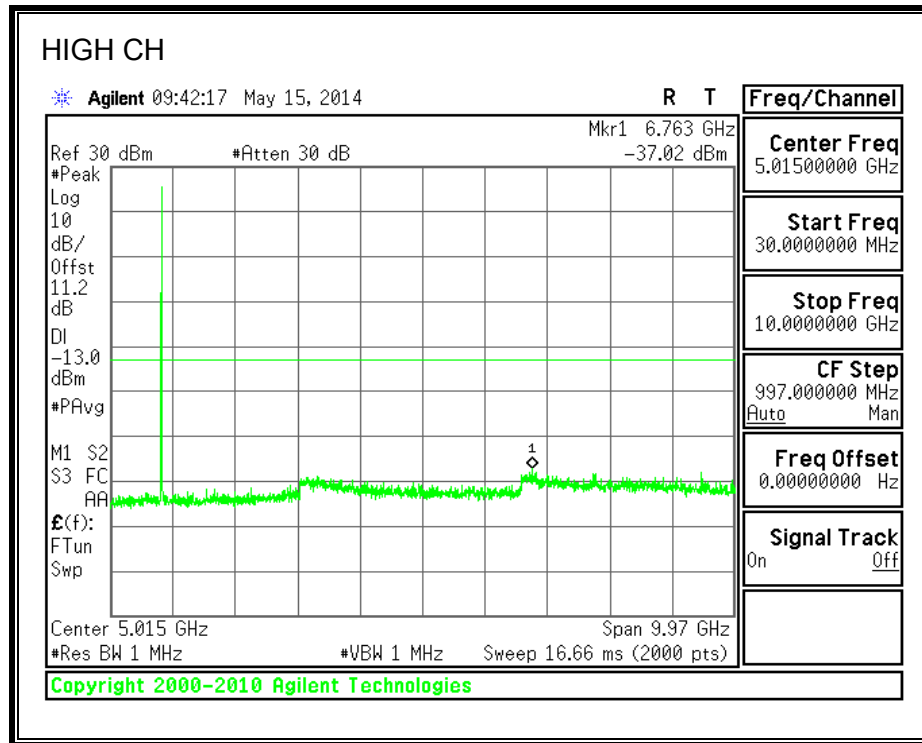



1900MHz BAND

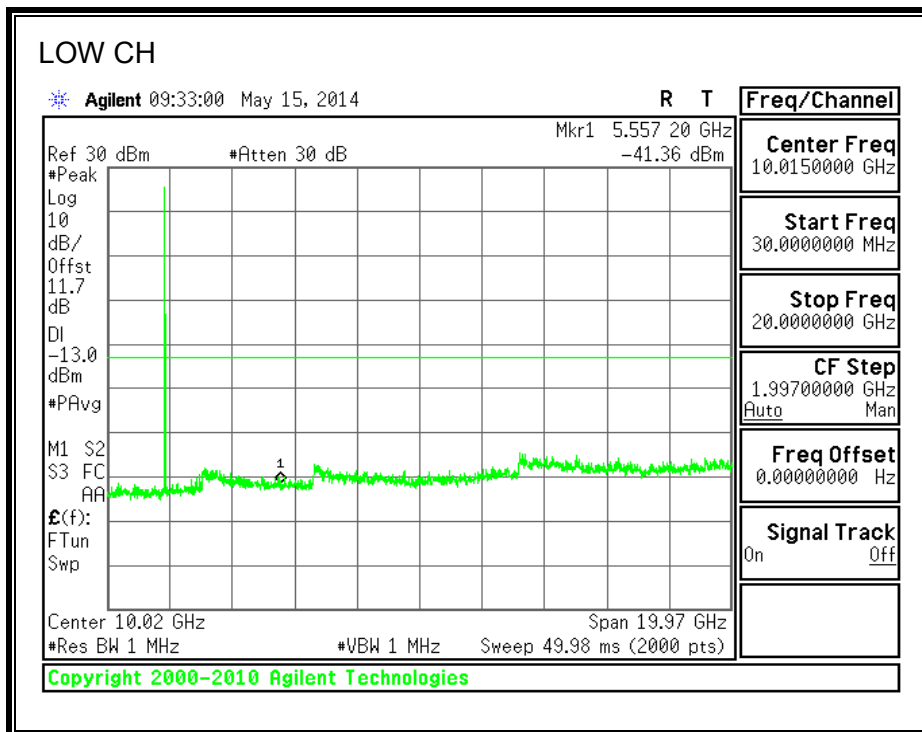

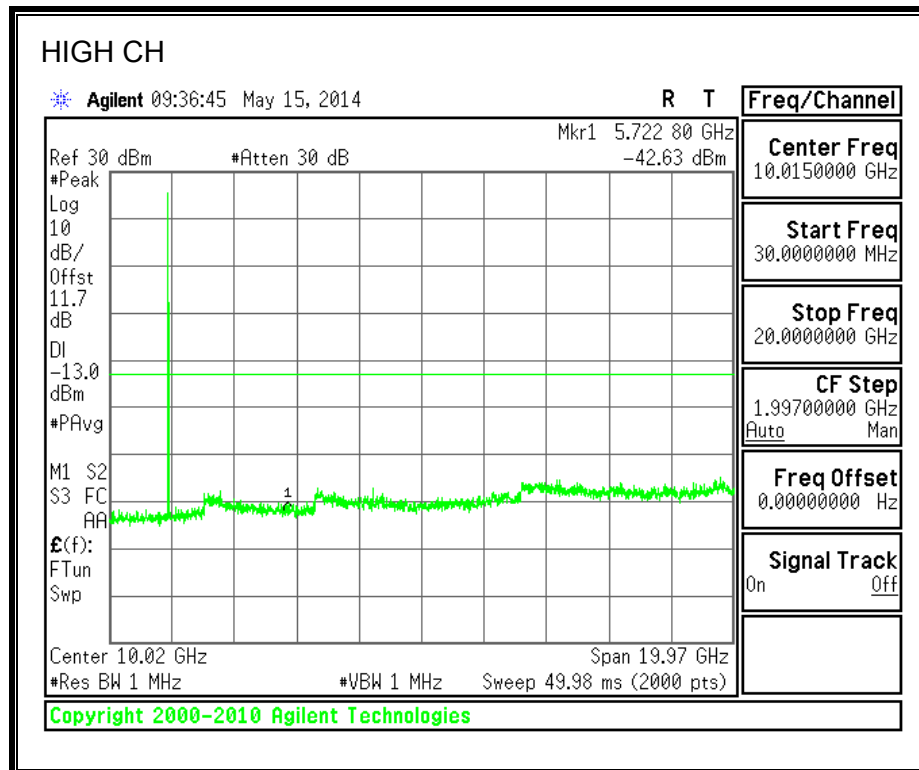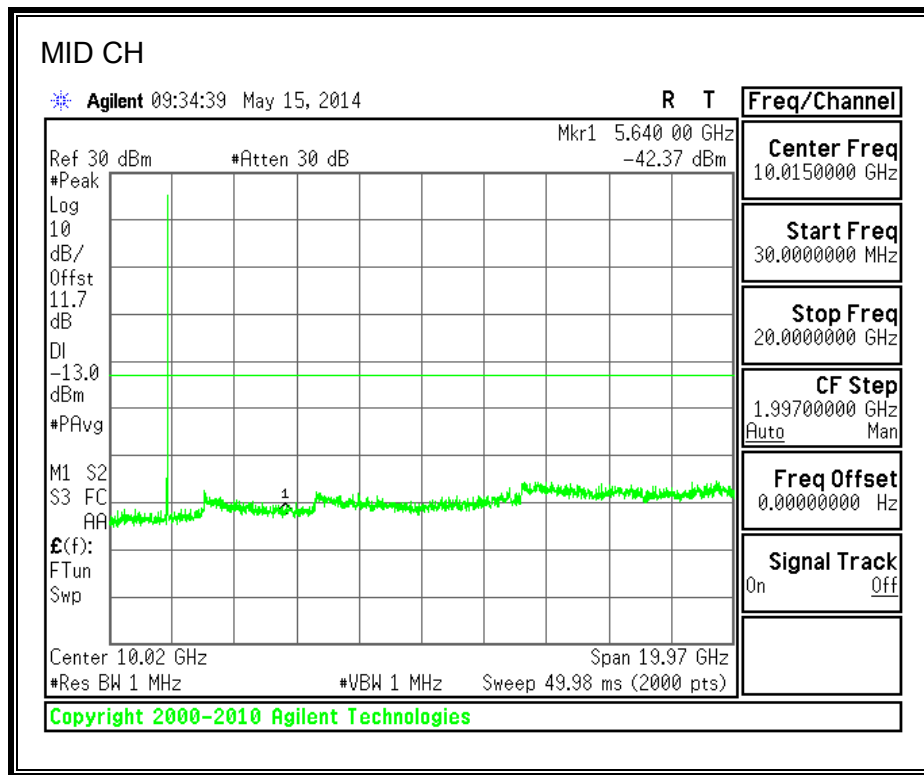



1700MHz BAND

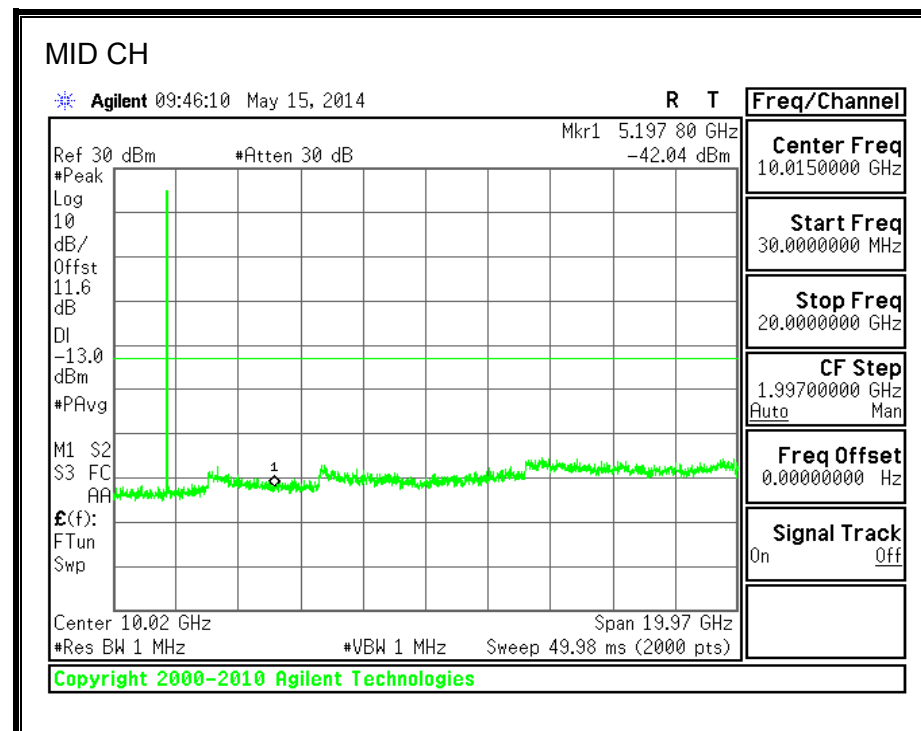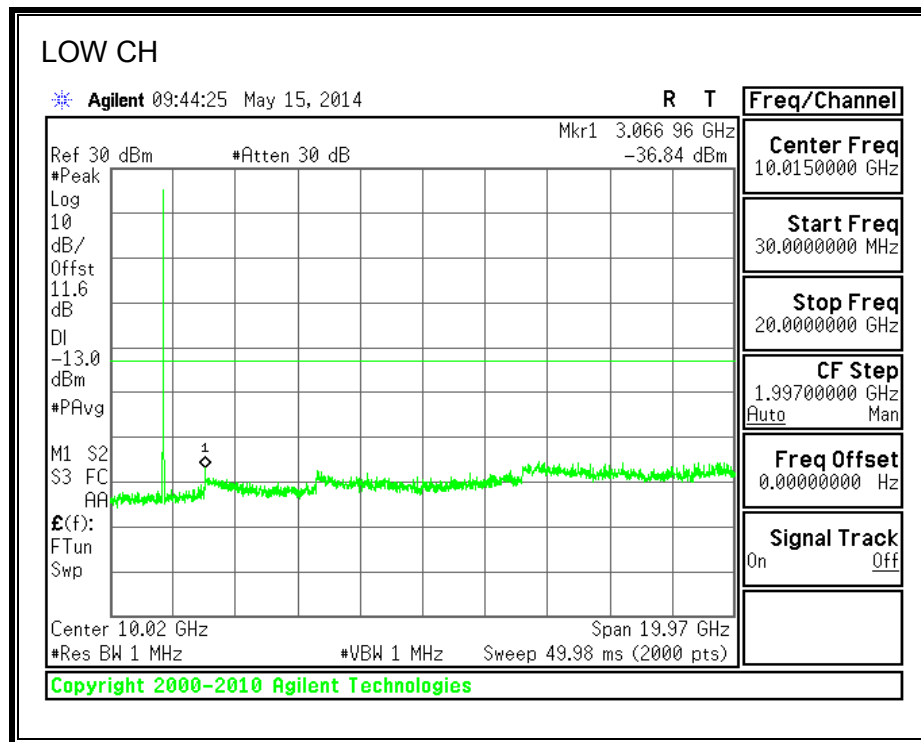


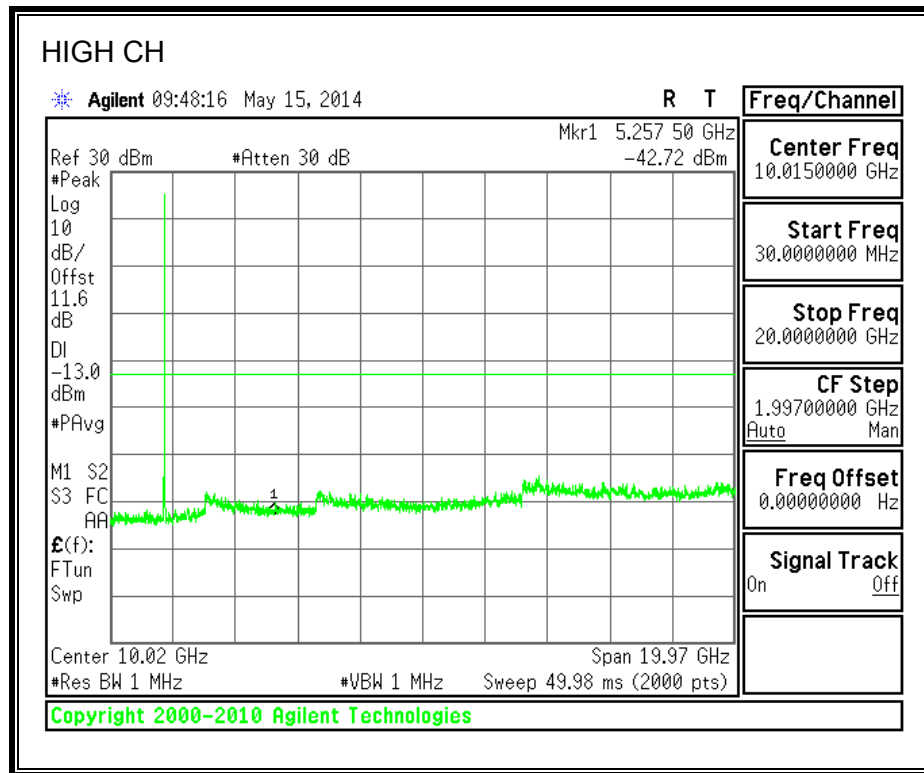


8.3.4. UMTS HSDPA


850MHz BAND

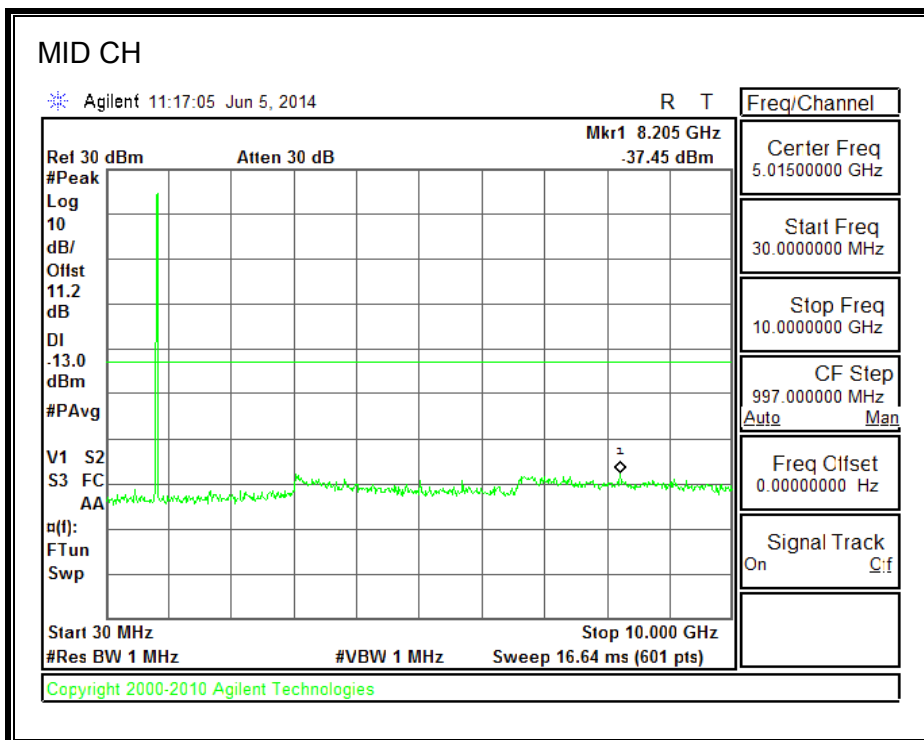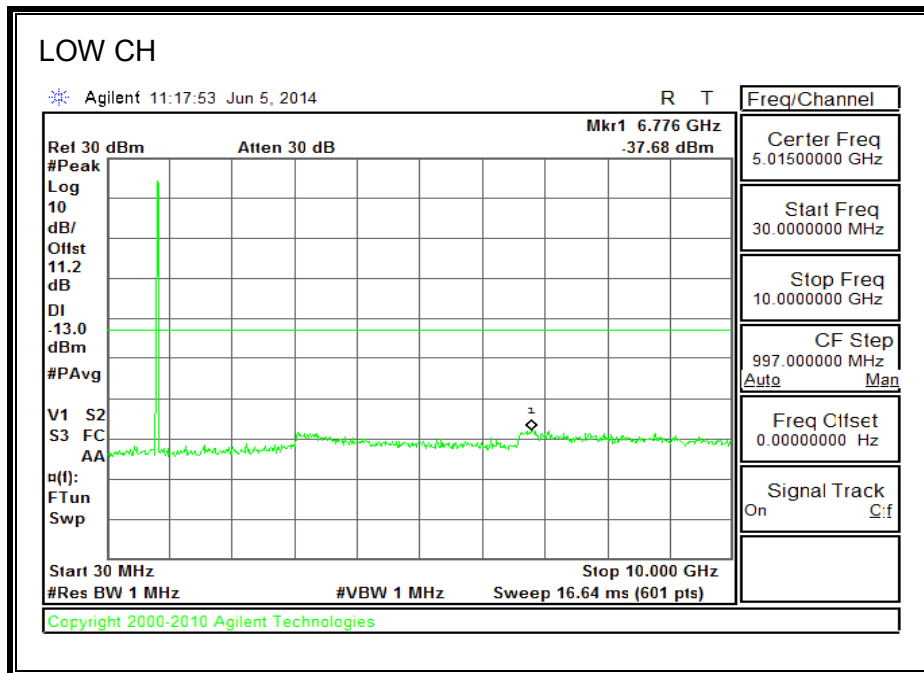


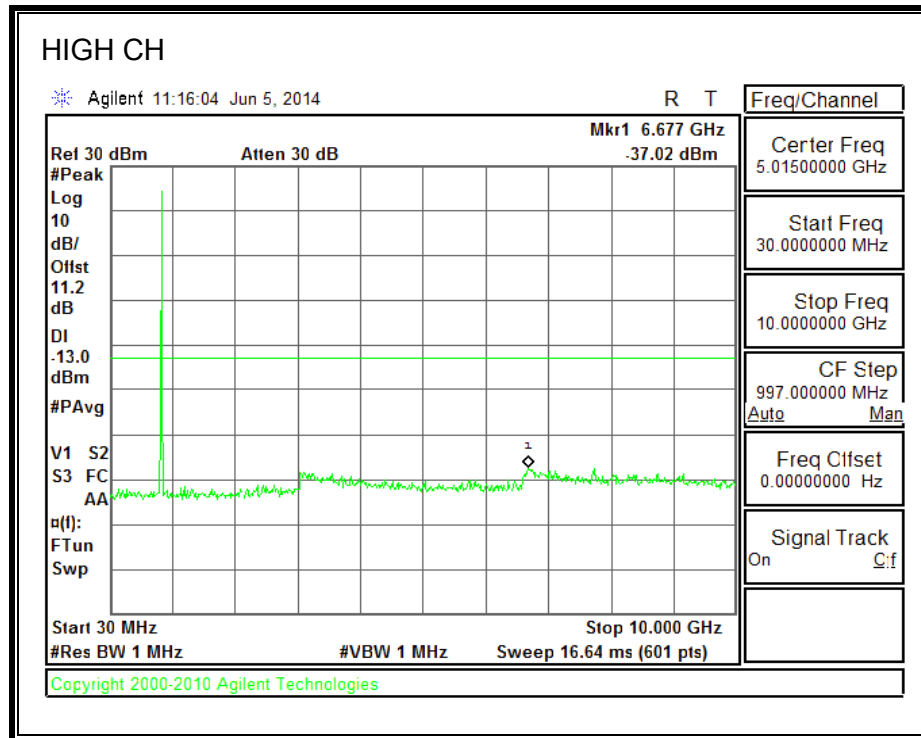



1900MHz BAND

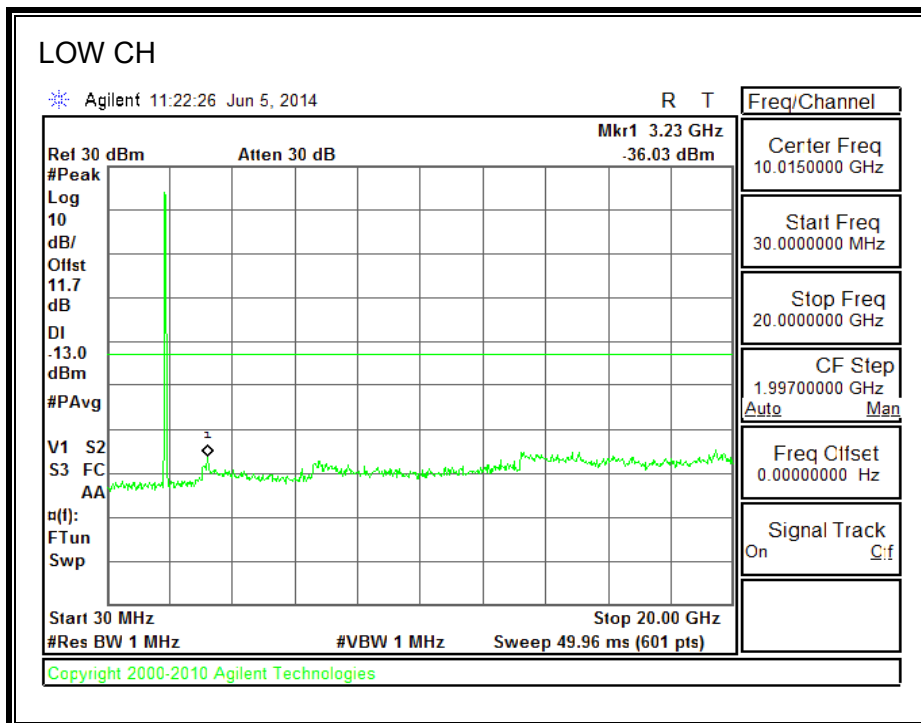

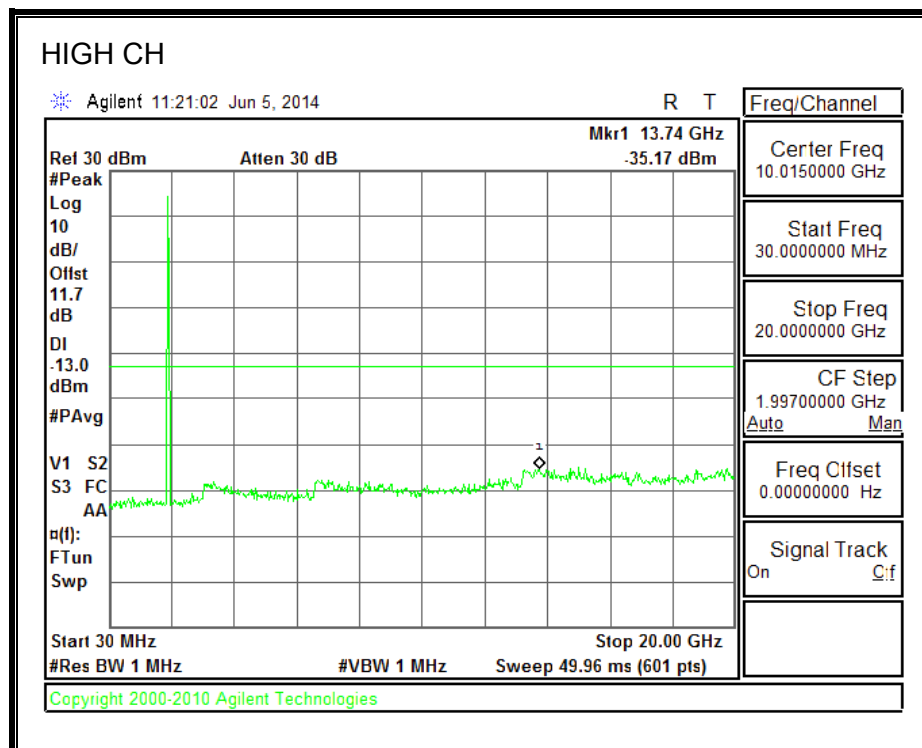



1700MHz BAND

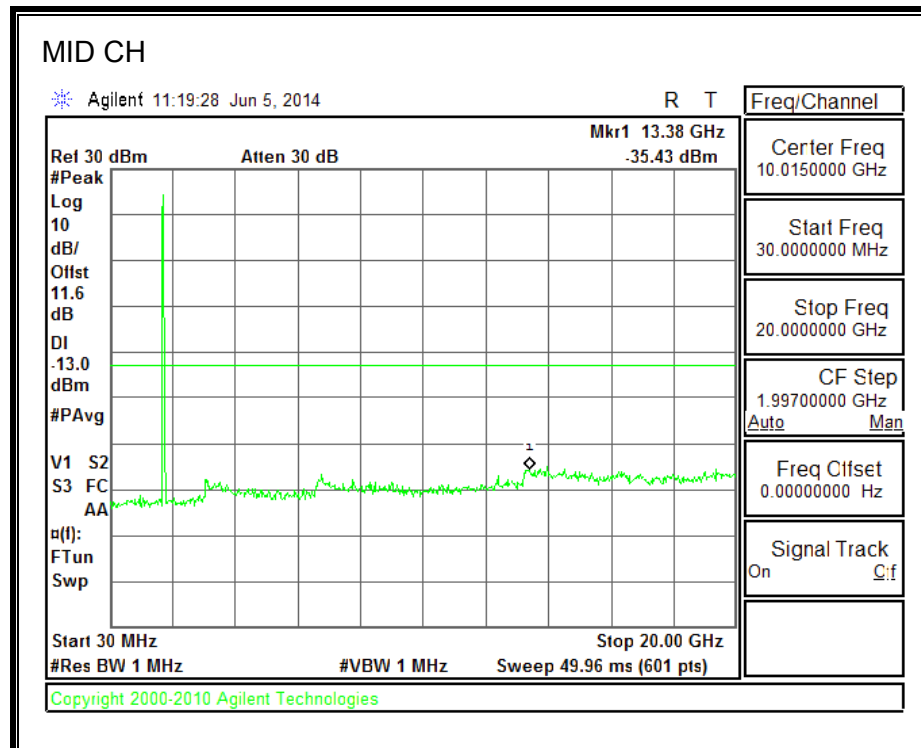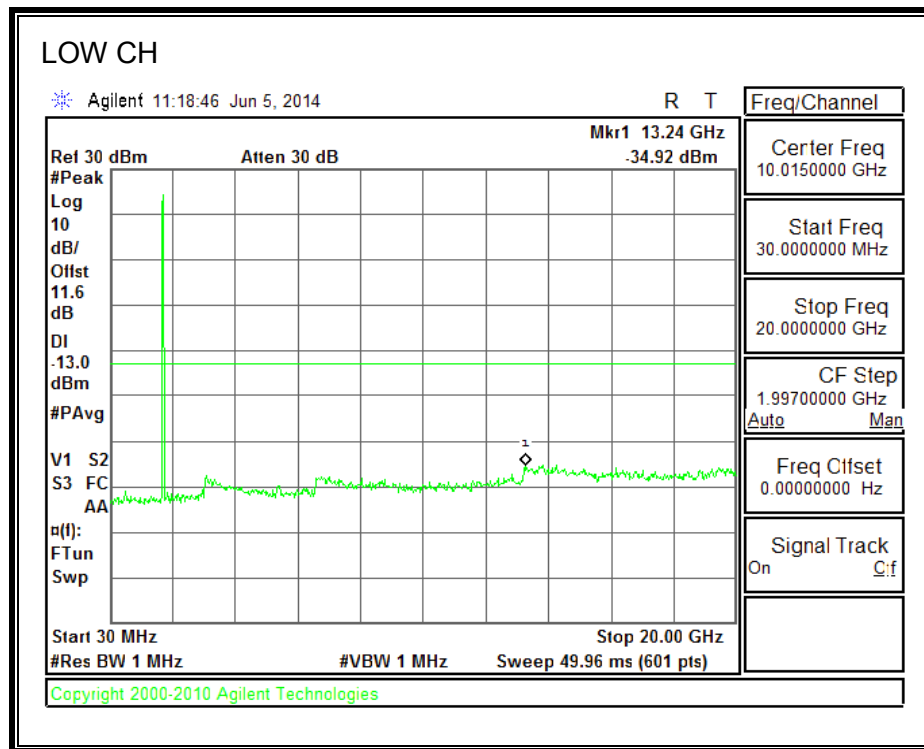


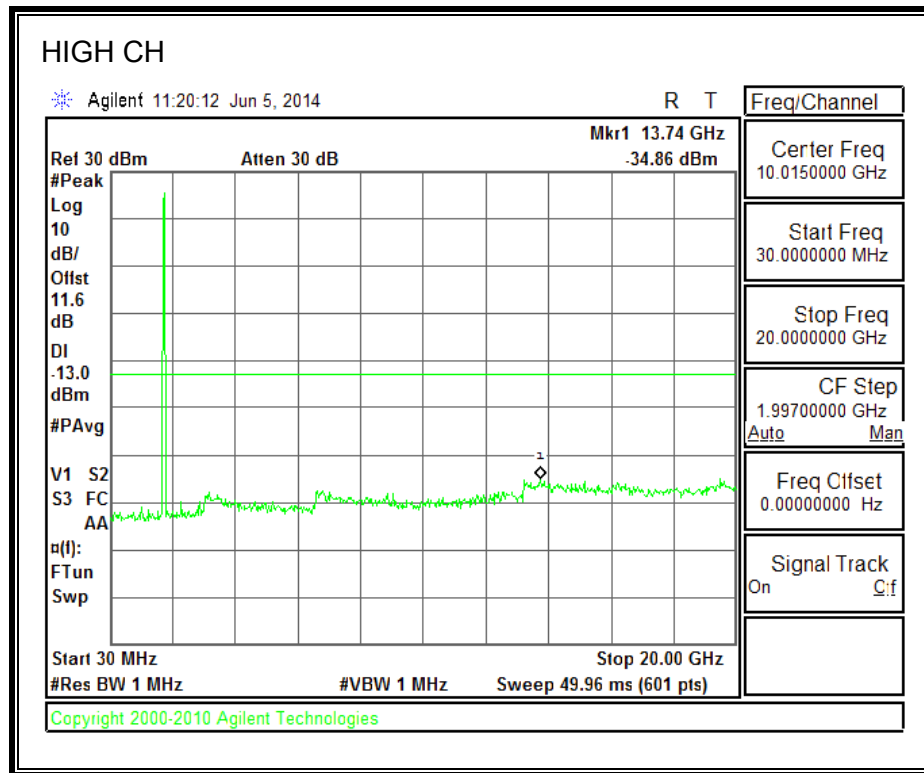


8.3.5. CDMA2000 1xRTT



850MHz BAND

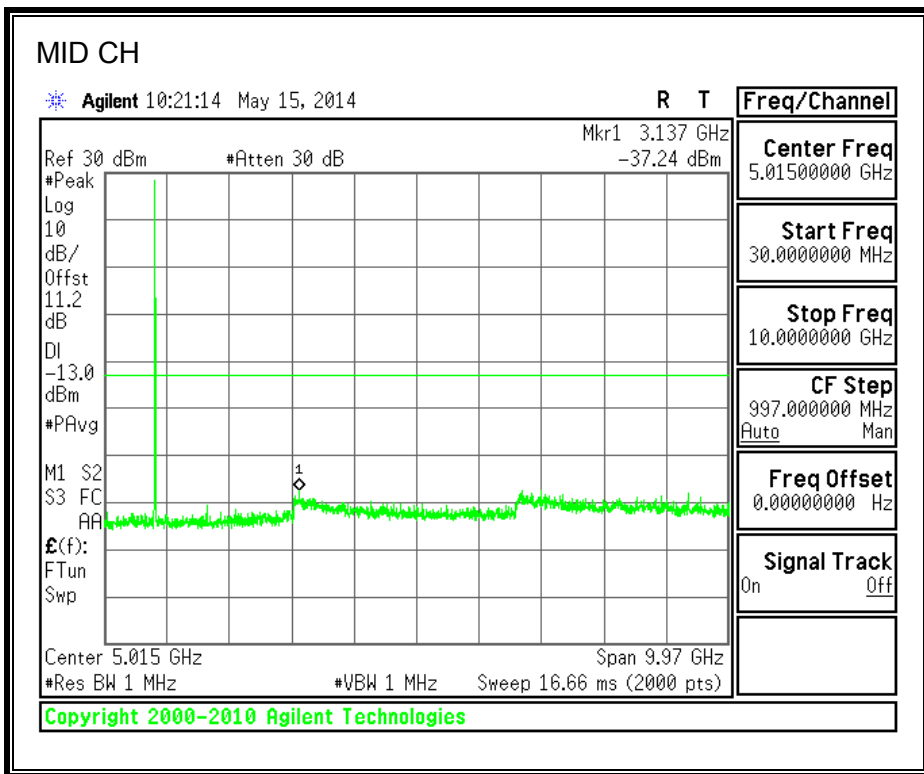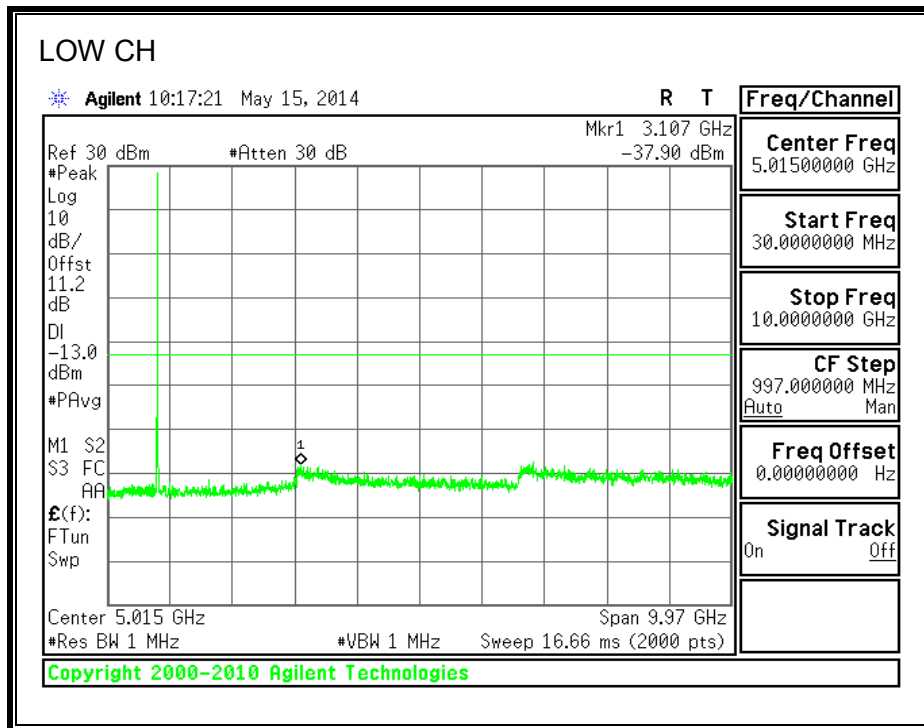


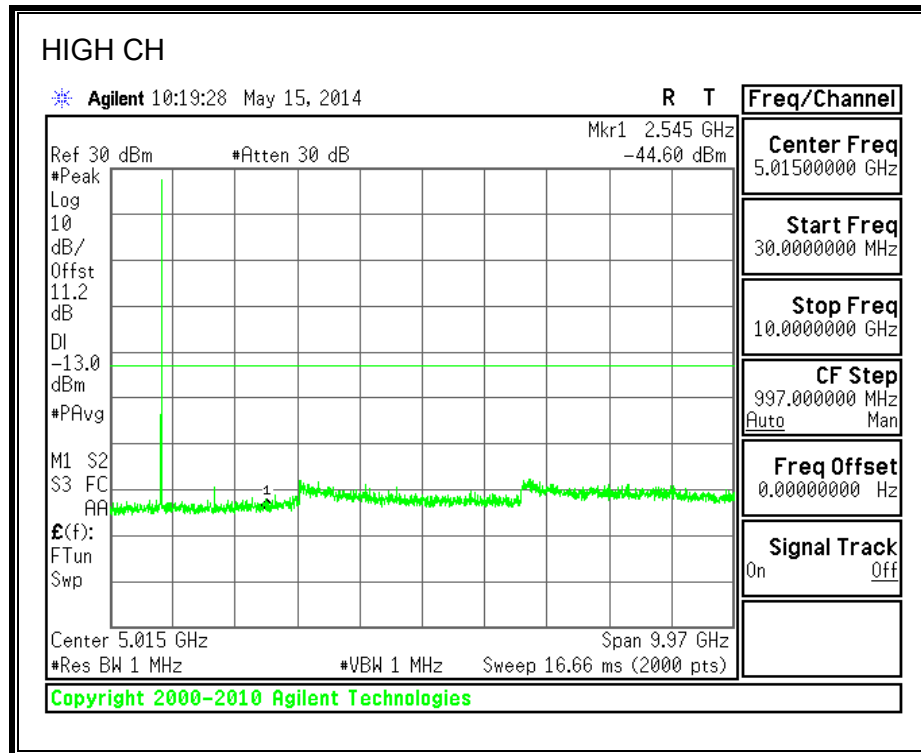



1900MHz BAND

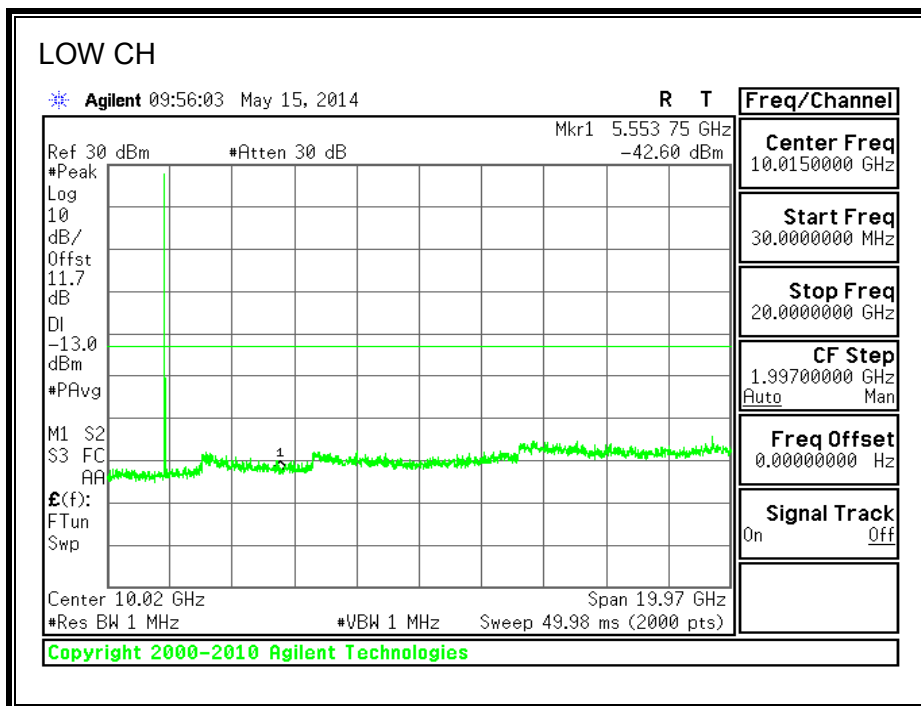

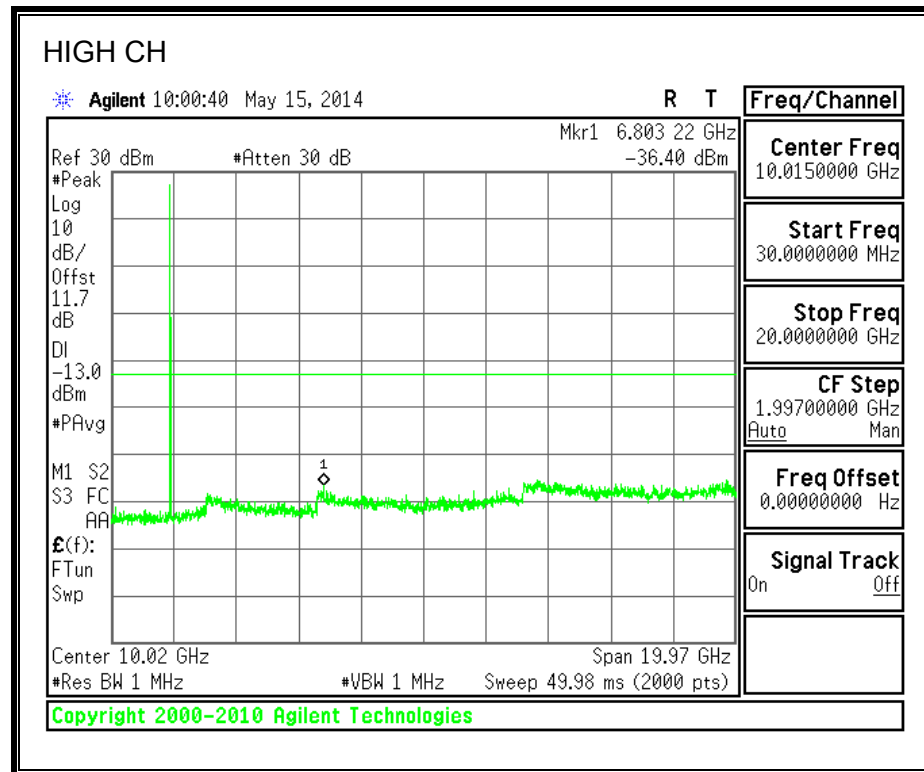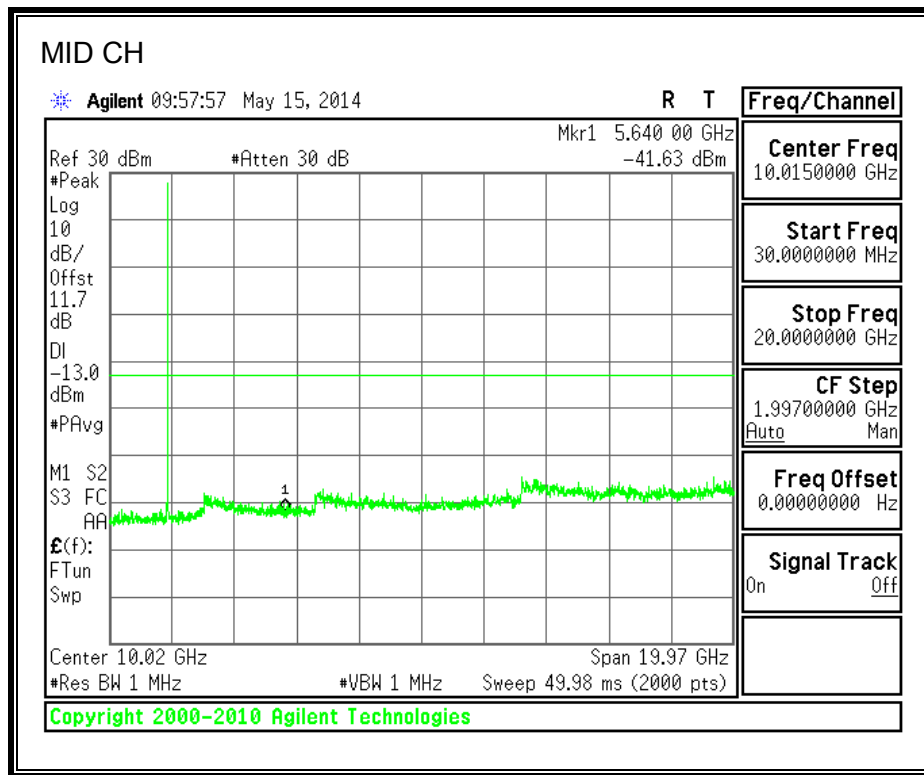




1700MHz BAND

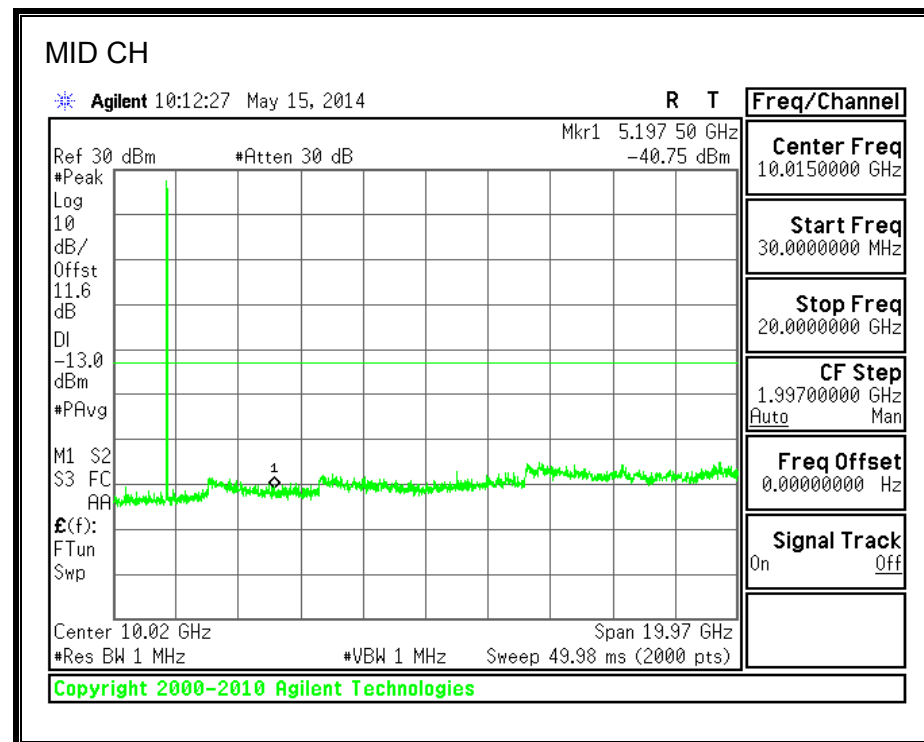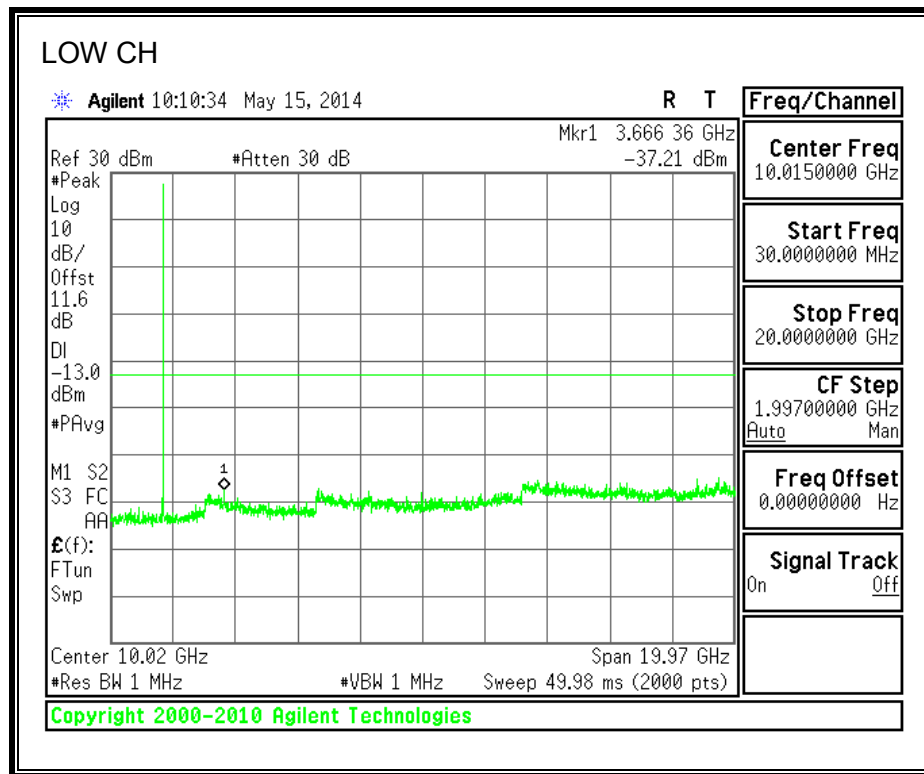

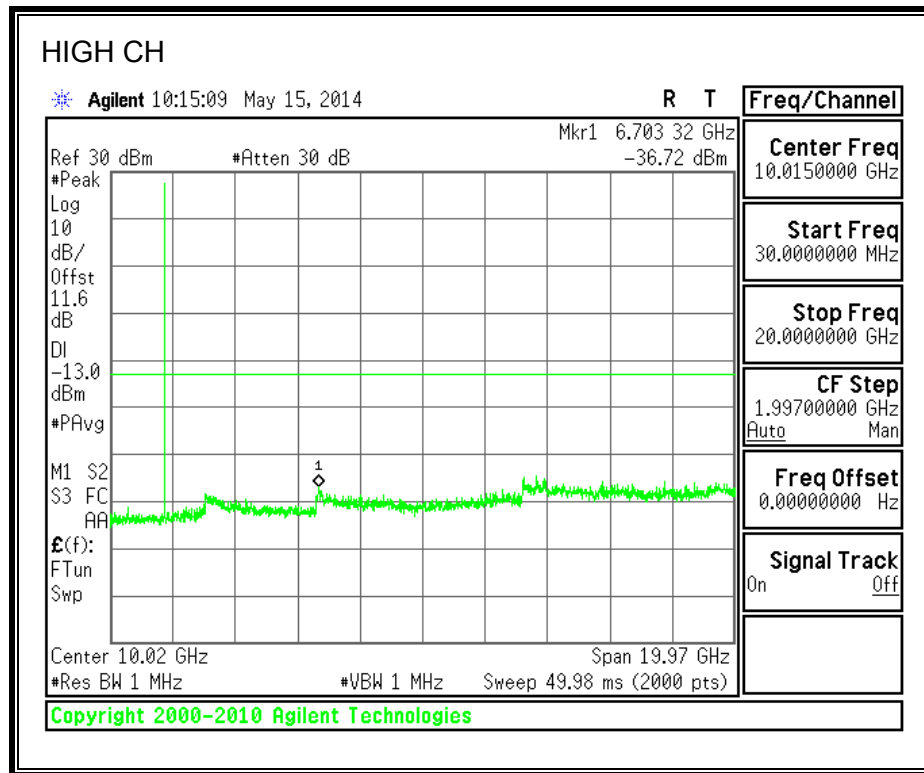



800MHz SECONDARY BAND

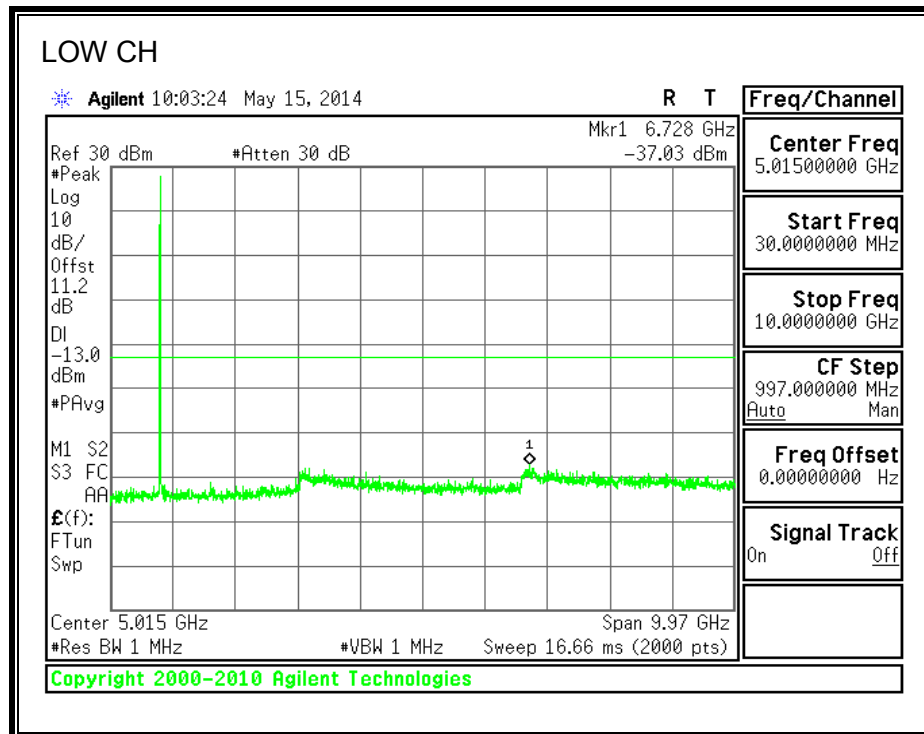


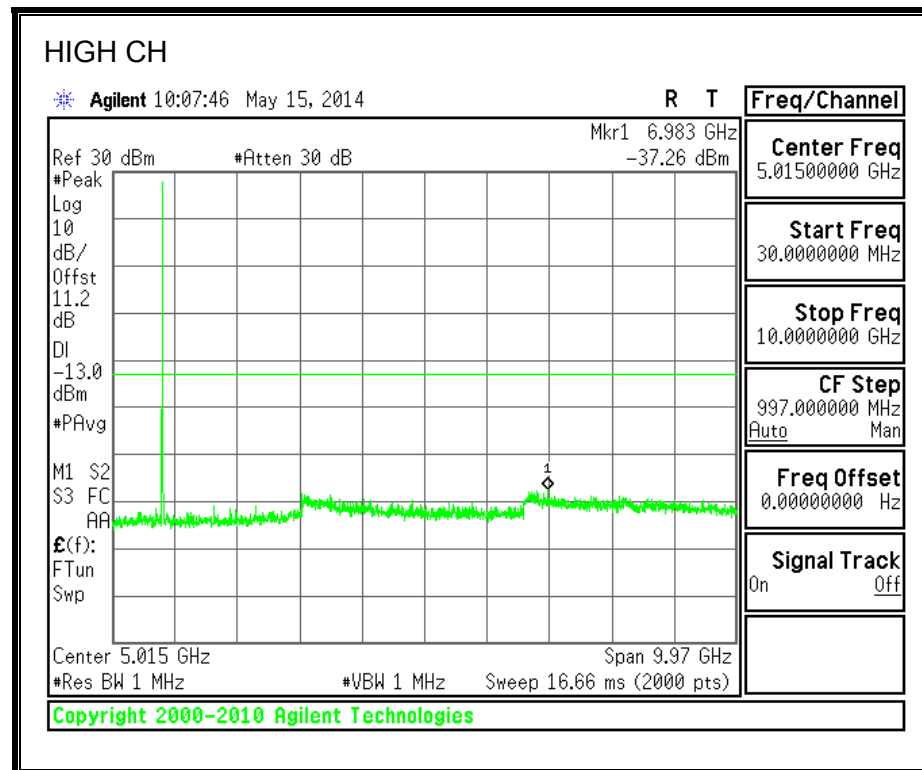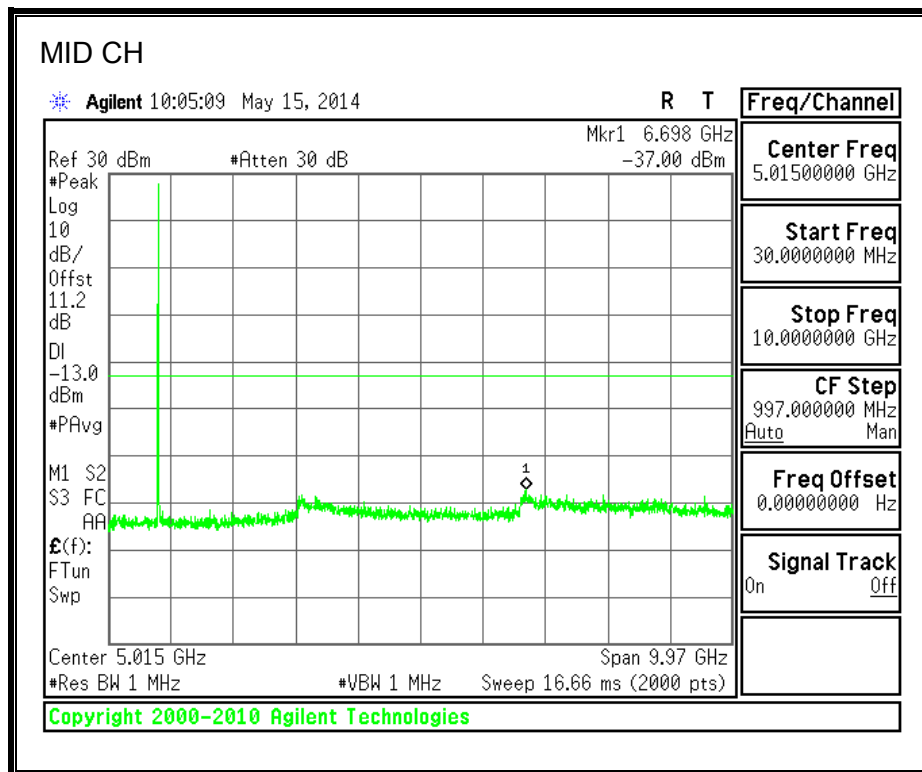


8.3.6. CDMA2000 EVDO Rev. A



850MHz BAND

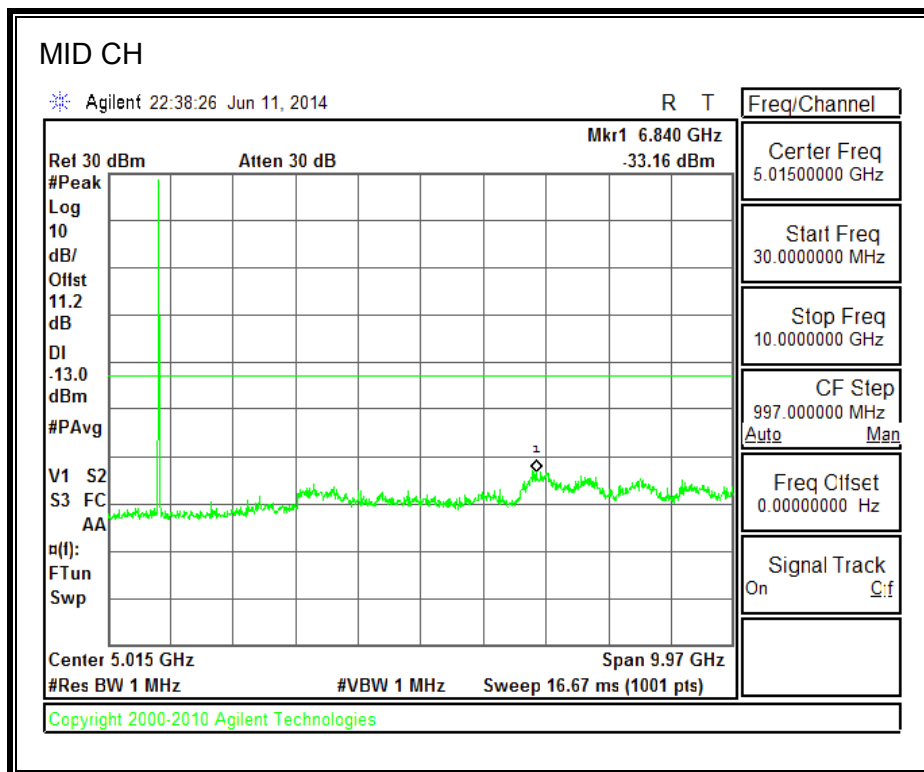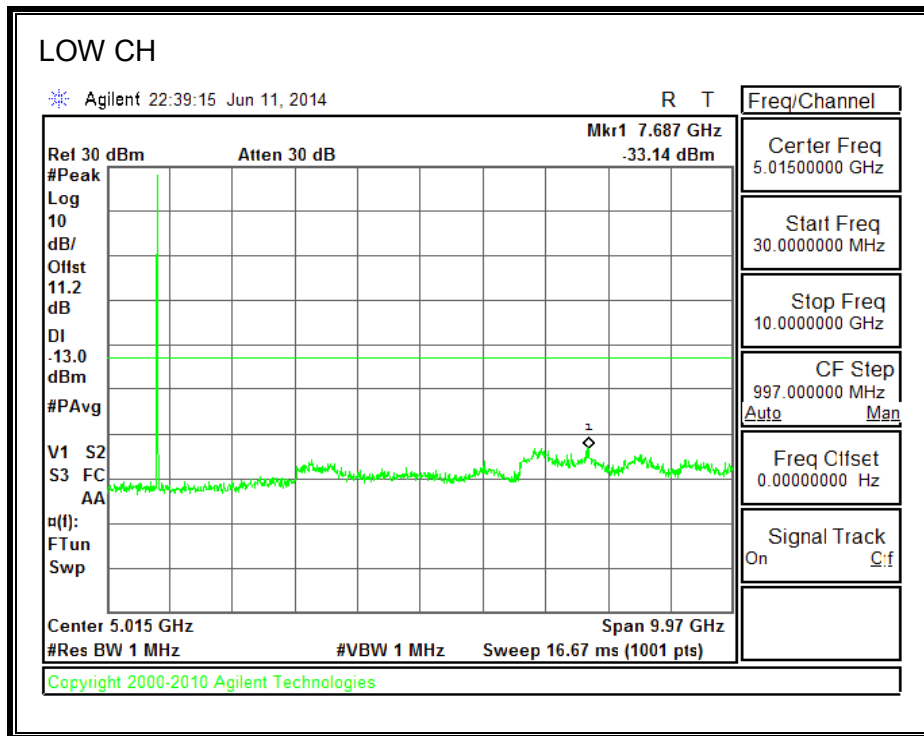


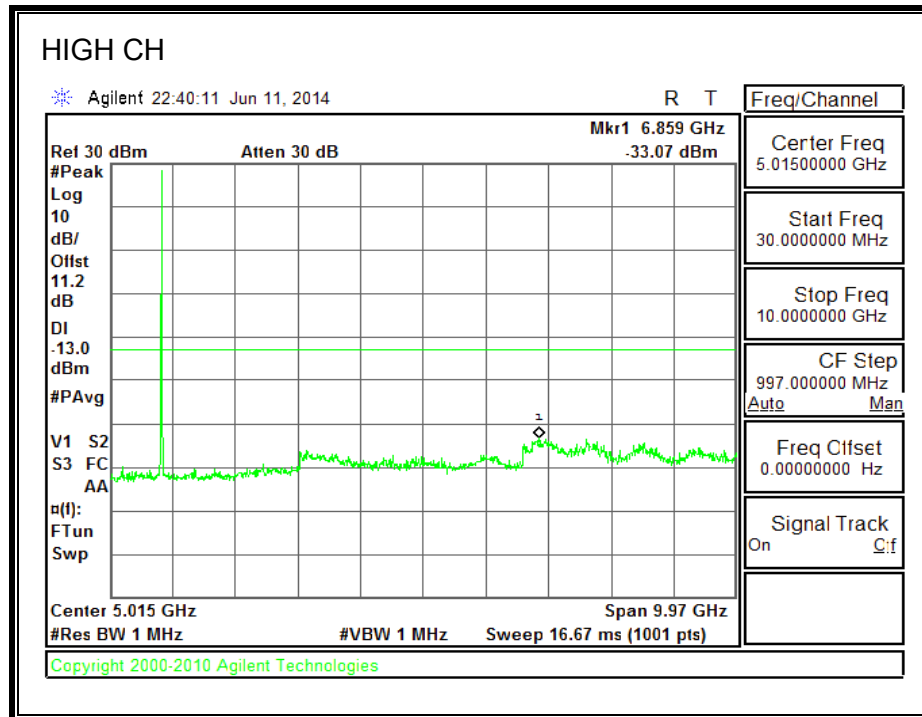



1900MHz BAND

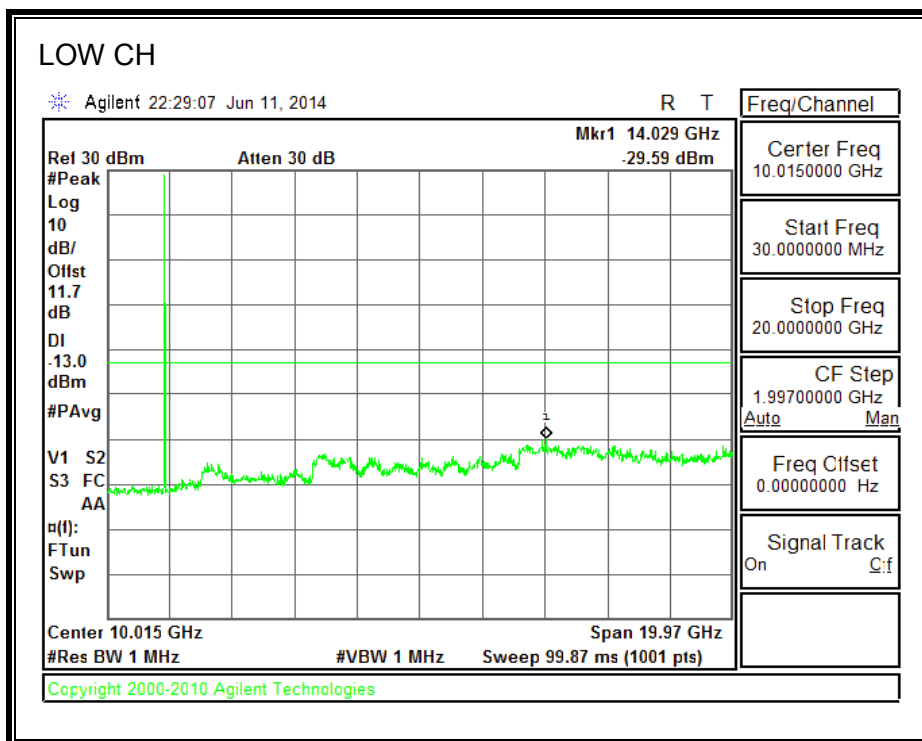

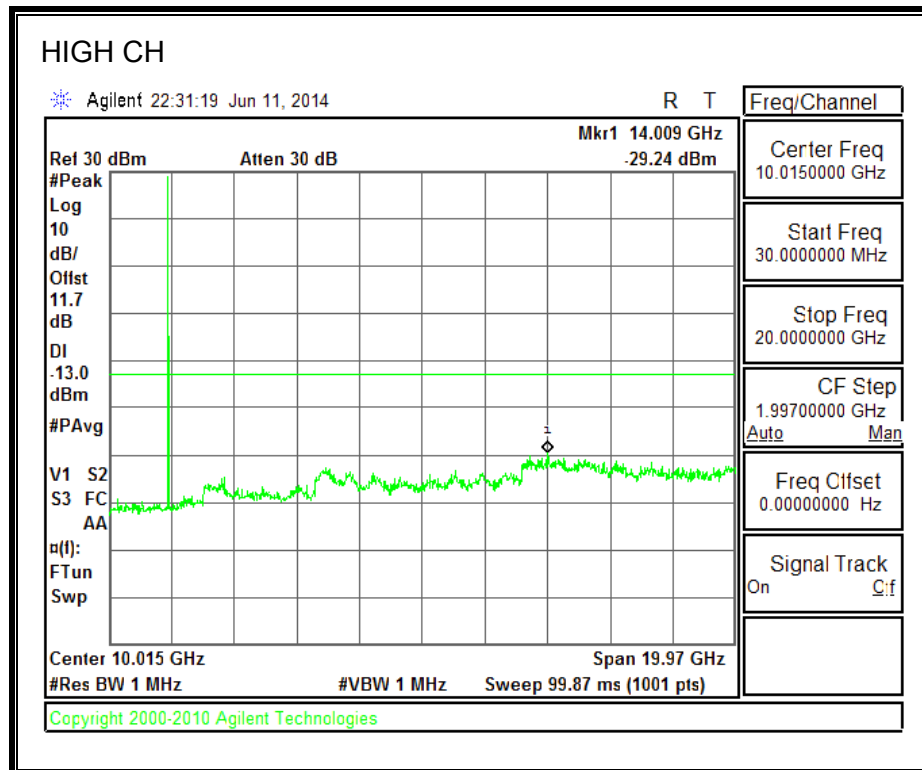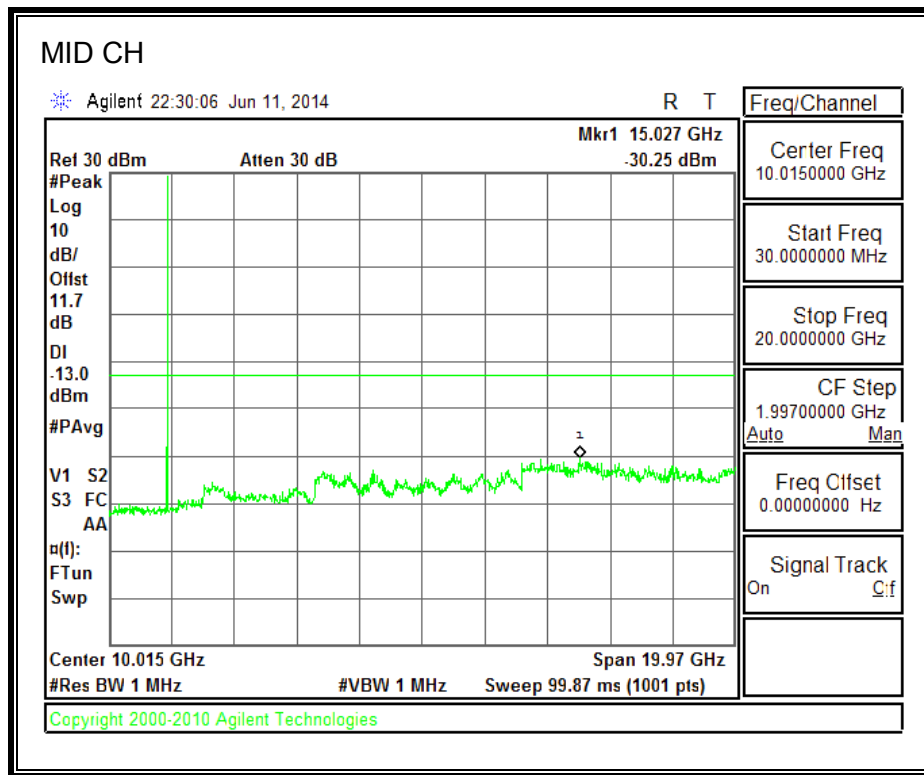




1700MHz BAND

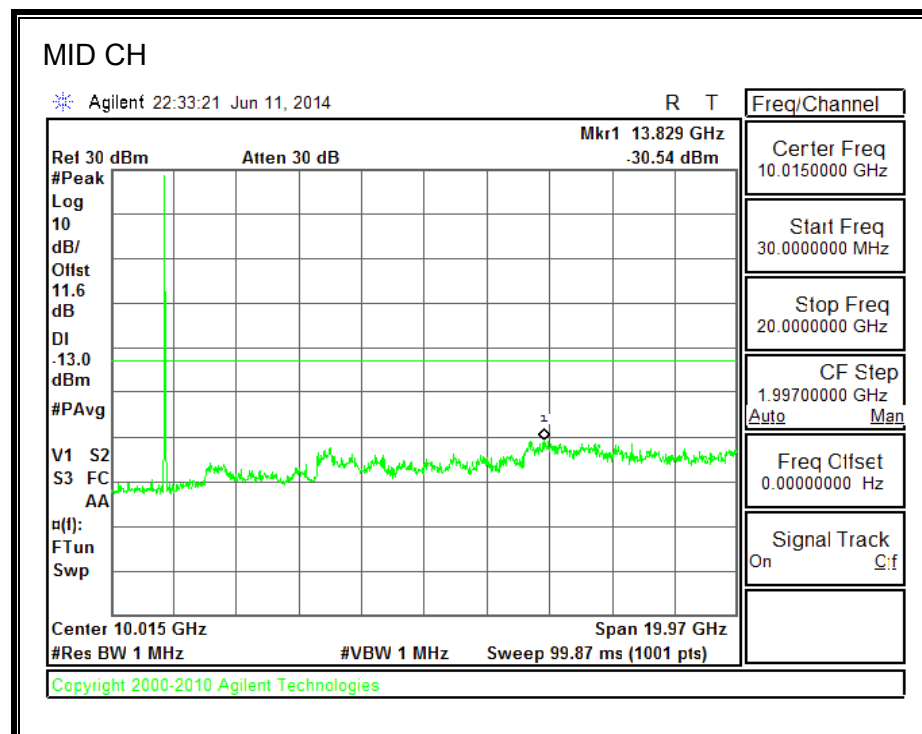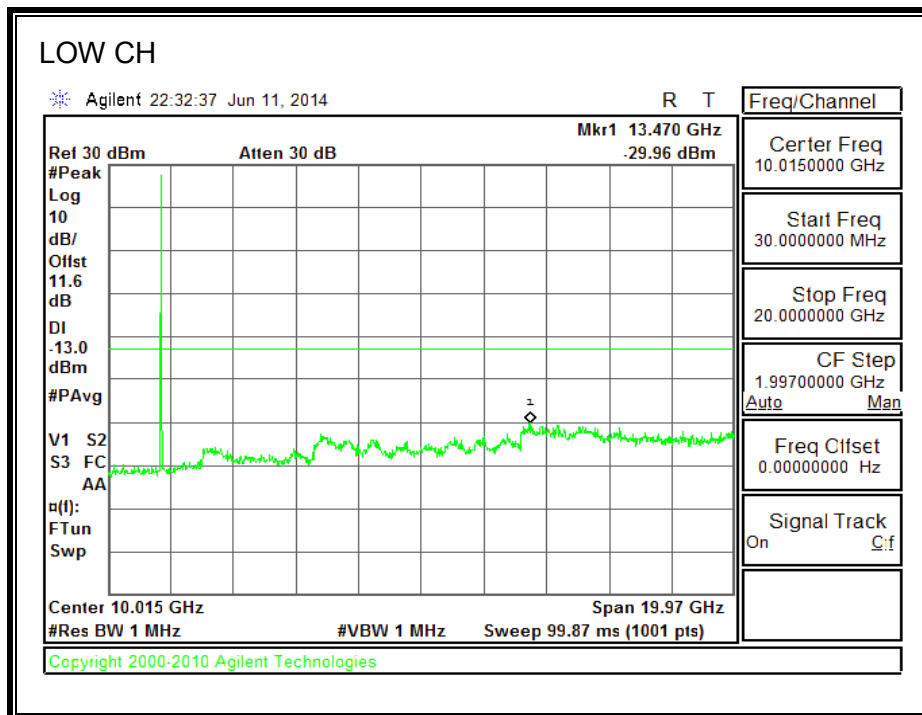

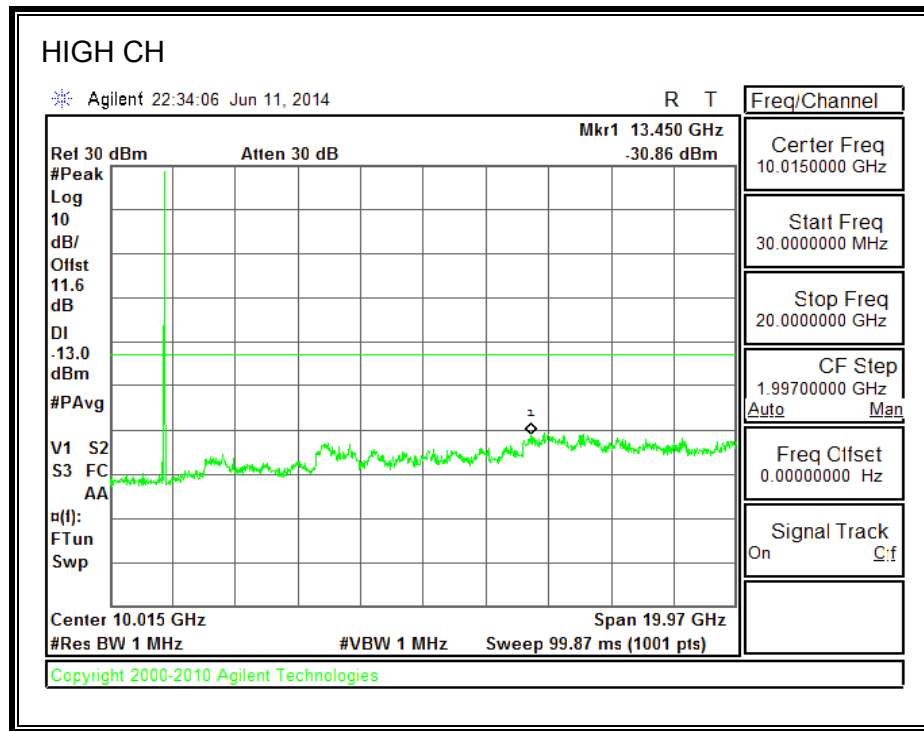

800MHz SECONDARY BAND

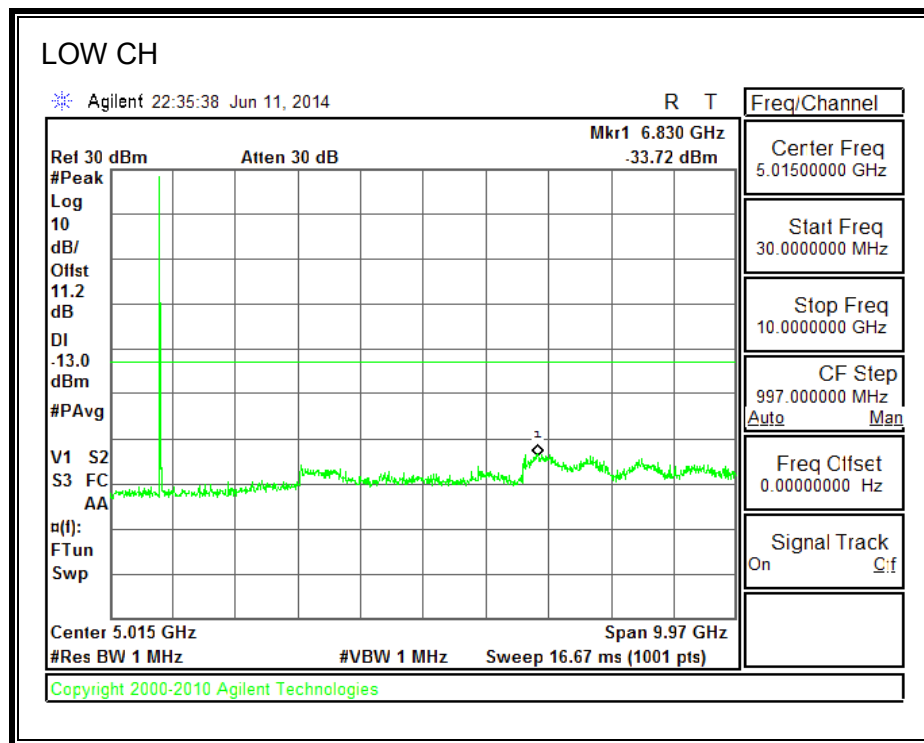

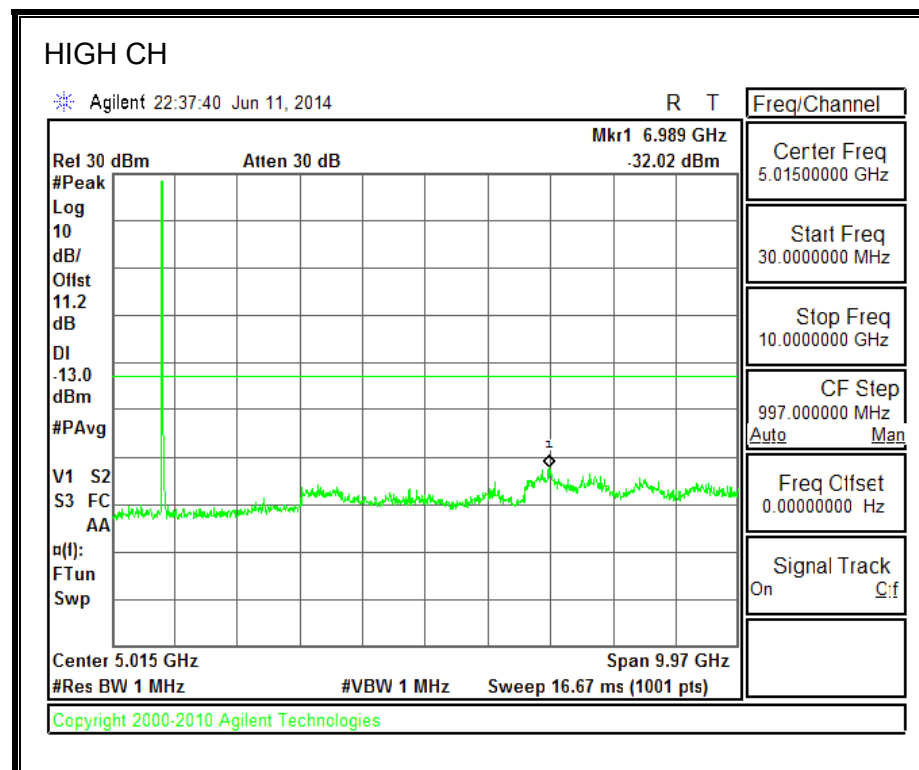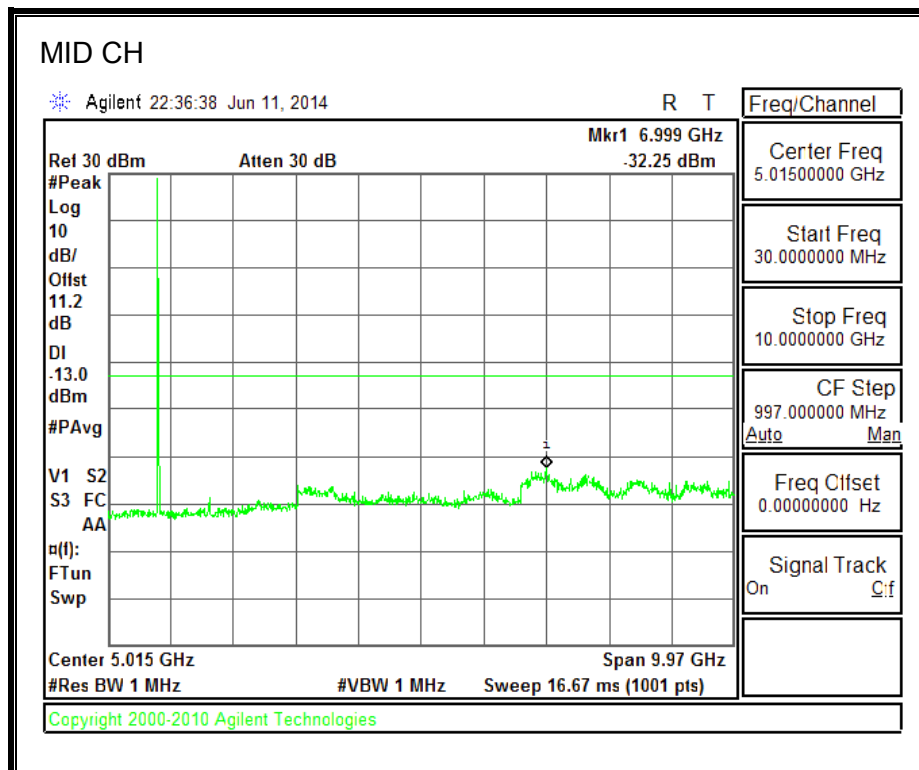

9. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54.& §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 & §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- GPRS and EGPRS
- UMTS REL 99
- CDMA2000 1xRTT BC0, BC1, BC10 and BC15

RESULTS

See the following pages.

9.1. GSM

GRPS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0184	848.9782		
Extreme (50C)		824.0185	848.9783	32.3	0.039
Extreme (40C)		824.0185	848.9783	29.0	0.035
Extreme (30C)		824.0185	848.9783	29.2	0.035
Extreme (10C)		824.0185	848.9783	28.8	0.034
Extreme (0C)		824.0185	848.9783	28.2	0.034
Extreme (-10C)		824.0185	848.9783	28.6	0.034
Extreme (-20C)		824.0185	848.9783	30.2	0.036
Extreme (-30C)		824.0185	848.9783	29.3	0.035
25C	10%	824.0185	848.9783	33.5	0.040
	-10%	824.0185	848.9783	32.8	0.039
	End Point	824.0185	848.9783	34.0	0.041

EGRPS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0382	848.9650		
Extreme (50C)		824.0382	848.9650	13.2	0.016
Extreme (40C)		824.0382	848.9650	15.6	0.019
Extreme (30C)		824.0382	848.9650	-15.0	-0.018
Extreme (10C)		824.0382	848.9650	13.2	0.016
Extreme (0C)		824.0382	848.9650	12.5	0.015
Extreme (-10C)		824.0382	848.9650	12.4	0.015
Extreme (-20C)		824.0382	848.9650	15.2	0.018
Extreme (-30C)		824.0382	848.9650	13.2	0.016
25C	10%	824.0382	848.9650	13.0	0.016
	-10%	824.0382	848.9650	13.5	0.016
	End Point	824.0382	848.9650	13.0	0.016

GRPS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0320	1909.9703		
Extreme (50C)		1850.0321	1909.9704	78.4	0.042
Extreme (40C)		1850.0321	1909.9704	51.2	0.027
Extreme (30C)		1850.0321	1909.9704	47.4	0.025
Extreme (10C)		1850.0321	1909.9704	49.5	0.026
Extreme (0C)		1850.0321	1909.9704	53.2	0.028
Extreme (-10C)		1850.0321	1909.9704	54.0	0.029
Extreme (-20C)		1850.0321	1909.9704	50.4	0.027
Extreme (-30C)		1850.0321	1909.9704	50.2	0.027
25C	10%	1850.0321	1909.9704	78.5	0.042
	-10%	1850.0321	1909.9704	80.5	0.043
	End Point	1850.0321	1909.9704	82.0	0.044

EGRPS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0244	1909.9678		
Extreme (50C)		1850.0245	1909.9679	76.0	0.040
Extreme (40C)		1850.0245	1909.9678	52.2	0.028
Extreme (30C)		1850.0245	1909.9678	47.2	0.025
Extreme (10C)		1850.0245	1909.9678	48.4	0.026
Extreme (0C)		1850.0245	1909.9678	51.2	0.027
Extreme (-10C)		1850.0245	1909.9678	51.3	0.027
Extreme (-20C)		1850.0245	1909.9678	52.3	0.028
Extreme (-30C)		1850.0245	1909.9678	53.0	0.028
25C	10%	1850.0245	1909.9679	78.0	0.041
	-10%	1850.0245	1909.9679	81.2	0.043
	End Point	1850.0245	1909.9679	81.2	0.043

9.2. WCDMA

WCDMA REL99 BAND 2

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0742	1909.9192		
Extreme (50C)		1850.0742	1909.9192	7.6	0.004
Extreme (40C)		1850.0742	1909.9192	7.8	0.004
Extreme (30C)		1850.0742	1909.9192	6.8	0.004
Extreme (10C)		1850.0742	1909.9192	6.9	0.004
Extreme (0C)		1850.0742	1909.9192	7.5	0.004
Extreme (-10C)		1850.0742	1909.9192	7.4	0.004
Extreme (-20C)		1850.0742	1909.9192	7.6	0.004
Extreme (-30C)		1850.0742	1909.9192	10.0	0.005
25C	10%	1850.0742	1909.9192	7.8	0.004
	-10%	1850.0742	1909.9192	7.4	0.004
	End Point	1850.0742	1909.9192	8.0	0.004

WCDMA REL99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.1266	1754.8716		
Extreme (50C)		1710.1266	1754.8716	-6.0	-0.003
Extreme (40C)		1710.1266	1754.8716	-2.0	-0.001
Extreme (30C)		1710.1266	1754.8716	2.6	0.002
Extreme (10C)		1710.1266	1754.8716	2.8	0.002
Extreme (0C)		1710.1266	1754.8716	3.8	0.002
Extreme (-10C)		1710.1266	1754.8716	2.0	0.001
Extreme (-20C)		1710.1266	1754.8716	3.0	0.002
Extreme (-30C)		1710.1266	1754.8716	-2.4	-0.001
25C	10%	1710.1266	1754.8716	-2.2	-0.001
	-10%	1710.1266	1754.8716	-2.8	-0.002
	End Point	1710.1266	1754.8716	-4.2	-0.002

WCDMA REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.1283	848.2757		
Extreme (50C)		824.1283	848.2757	-4.6	-0.005
Extreme (40C)		824.1283	848.2757	-3.0	-0.004
Extreme (30C)		824.1283	848.2757	2.4	0.003
Extreme (10C)		824.1283	848.2757	1.8	0.002
Extreme (0C)		824.1283	848.2757	-4.0	-0.005
Extreme (-10C)		824.1283	848.2757	-2.8	-0.003
Extreme (-20C)		824.1283	848.2757	-3.0	-0.004
Extreme (-30C)		824.1283	848.2757	-4.2	-0.005
25C	10%	824.1283	848.2757	-2.5	-0.003
	-10%	824.1283	848.2757	-3.8	-0.005
	End Point	824.1283	848.2757	-4.2	-0.005

9.3. CDMA

CDMA 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0052	848.9969		
Extreme (50C)		824.0052	848.9969	2.4	0.003
Extreme (40C)		824.0052	848.9969	2.8	0.003
Extreme (30C)		824.0052	848.9969	2.0	0.002
Extreme (10C)		824.0052	848.9969	2.4	0.003
Extreme (0C)		824.0052	848.9969	2.6	0.003
Extreme (-10C)		824.0052	848.9969	2.6	0.003
Extreme (-20C)		824.0052	848.9969	2.2	0.003
Extreme (-30C)		824.0052	848.9969	2.2	0.003
25C	10%	824.0052	848.9969	2.5	0.003
	-10%	824.0052	848.9969	2.8	0.003
	End Point	824.0052	848.9969	3.8	0.005

CDMA 1xRTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.5563	1909.4426		
Extreme (50C)		1850.5563	1909.4426	12.5	0.007
Extreme (40C)		1850.5563	1909.4426	6.2	0.003
Extreme (30C)		1850.5563	1909.4426	6.4	0.003
Extreme (10C)		1850.5563	1909.4426	6.6	0.004
Extreme (0C)		1850.5563	1909.4426	6.4	0.003
Extreme (-10C)		1850.5563	1909.4426	7.5	0.004
Extreme (-20C)		1850.5563	1909.4426	6.4	0.003
Extreme (-30C)		1850.5563	1909.4426	6.2	0.003
25C	10%	1850.5563	1909.4426	11.2	0.006
	-10%	1850.5563	1909.4426	12.4	0.007
	End Point	1850.5563	1909.4426	15.4	0.008

CDMA 1xRTT BC10

Limit		816	823.975	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	816.5565	823.4461		
Extreme (50C)		816.5565	823.4461	6.4	0.008
Extreme (40C)		816.5565	823.4461	3.6	0.004
Extreme (30C)		816.5565	823.4461	5.8	0.007
Extreme (10C)		816.5565	823.4461	6.5	0.008
Extreme (0C)		816.5565	823.4461	7.8	0.010
Extreme (-10C)		816.5565	823.4461	7.5	0.009
Extreme (-20C)		816.5565	823.4461	7.0	0.009
Extreme (-30C)		816.5565	823.4461	8.6	0.010
25C	10%	816.5565	823.4461	7.0	0.009
	-10%	816.5565	823.4461	7.1	0.009
	End Point	816.5565	823.4461	10.2	0.012

CDMA 1xRTT BC15

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage	(MHz)	(MHz)		
Normal (25C)	Normal	1710.5544	1754.4434		
Extreme (50C)		1710.5544	1754.4434	4.4	0.003
Extreme (40C)		1710.5544	1754.4434	5.0	0.003
Extreme (30C)		1710.5544	1754.4434	3.6	0.002
Extreme (10C)		1710.5544	1754.4434	6.2	0.004
Extreme (0C)		1710.5544	1754.4434	6.6	0.004
Extreme (-10C)		1710.5544	1754.4434	7.8	0.005
Extreme (-20C)		1710.5544	1754.4434	20.6	0.012
Extreme (-30C)		1710.5544	1754.4434	26.0	0.015
25C	10%	1710.5544	1754.4434	6.8	0.004
	-10%	1710.5544	1754.4434	7.0	0.004
	End Point	1710.5544	1754.4434	27.0	0.016

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50 and § 90.635

LIMITS

§22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

§24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

§27.50(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications

§ 90.635 Limitations on power and antenna height.

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

Table—Equivalent Power and Antenna Heights for Base Stations in the 851–869 MHz and 935–940 MHz Bands Which Have a Requirement for a 32 km (20 mi) Service Area Radius

Antenna height (ATT) meters (feet)	Effective radiated power (watts) ^{1,2,4}
Above 1,372 (4,500)	65
Above 1,220 (4,000) to 1,372 (4,500)	70
Above 1,067 (3,500) to 1,220 (4,000)	75
Above 915 (3,000) to 1,067 (3,500)	100
Above 763 (2,500) to 915 (3,000)	140
Above 610 (2,000) to 763 (2,500)	200
Above 458 (1,500) to 610 (2,000)	350
Above 305 (1,000) to 458 (1,500)	600
Up to 305 (1,000)	31,000

1Power is given in terms of effective radiated power (ERP).

2Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.

3Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

KDB 971168 v02r01 RF Power output using broadband peak and average power meter method

MODES TESTED

- GPRS/EGPRS.
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO, Rev A, BC0, BC1
- BC10, BC15

RESULTS

10.1.1.LAT

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	28.35	683.91
		190	836.6	27.90	616.60
		251	848.8	27.98	628.06
	EGPRS	128	824.2	24.00	251.19
		190	836.6	23.43	220.29
		251	848.8	23.63	230.67

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	31.46	1399.59
		661	1880.0	31.86	1534.62
		810	1909.8	32.40	1737.80
	EGPRS	512	1850.2	28.58	721.11
		661	1880.0	28.98	790.68
		810	1909.8	29.52	895.36

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4357	826.4	19.47	88.51
		4405	836.0	19.90	97.72
		4455	846.0	20.19	104.47
	UMTS, HSDPA	4357	826.4	18.62	72.78
		4405	836.0	19.05	80.35
		4455	846.0	19.34	85.90

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	27.58	572.80
		9800	1880.0	27.63	579.43
		9938	1907.6	27.72	591.56
	UMTS, HSDPA	9662	1852.4	26.66	463.45
		9800	1880.0	26.71	468.81
		9938	1907.6	26.80	478.63

Part 27 1700MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	26.99	500.03
		1638	1732.6	27.09	511.68
		1738	1752.5	27.05	506.99
	UMTS, HSDPA	1537	1712.4	26.09	406.44
		1638	1732.6	26.19	415.91
		1738	1752.5	26.15	412.10

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	20.05	101.16
		384	836.5	20.40	109.65
		777	848.3	20.38	109.14
	BC 0, EVDO Rev A	1013	824.7	19.66	92.47
		384	836.5	19.88	97.27
		777	848.3	20.30	107.15

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	27.62	578.10
		600	1880.0	27.34	542.00
		1175	1908.8	27.78	599.79
	BC1, EVDO REV A	25	1851.3	27.74	594.29
		600	1880.0	27.46	557.19
		1175	1908.8	27.90	616.60

Part 27 1700MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC15, 1xRTT	25	1711.3	27.29	535.80
		450	1732.5	27.14	517.61
		875	1753.8	27.33	540.75
	BC15, EVDO, REV A	25	1711.3	27.49	561.05
		450	1732.5	27.34	542.00
		875	1753.8	27.53	566.24

Part 90 800MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	476	817.9	20.18	104.23
		526	819.2	20.26	106.17
		684	823.1	20.28	106.66
	BC10, EVDO A	476	817.9	20.12	102.80
		526	819.2	20.18	104.23
		684	823.1	20.22	105.20

CDMA2000 REV B				
Mode	Channel	f (MHz)	ERP (Average)	
			dBm	mW
EVDO Rev B Two Carriers Min.	1013+31	825.3	16.68	46.56
	384+425	837.2	16.83	48.19
	736+777	847.6	17.21	52.60
EVDO Rev B Two Carriers Max	1013+156	826.5	16.64	46.13
	384+550	838.8	16.89	48.87
	611+777	844.9	16.97	49.77
EVDO Rev B Three Carriers Min.	1013+31+72	825.9	16.24	42.07
	384+425+466	837.7	16.43	43.95
	695+736+777	846.7	16.31	42.76

10.1.2.UAT

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	27.10	512.86
		190	836.6	26.72	469.89
		251	848.8	26.74	472.06
	EGPRS	128	824.2	22.20	165.96
		190	836.6	22.52	178.65
		251	848.8	22.24	167.49

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	29.63	918.33
		661	1880.0	29.18	827.94
		810	1909.8	30.01	1002.31
	EGPRS	512	1850.2	29.03	799.83
		661	1880.0	27.48	559.76
		810	1909.8	29.01	796.16

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4357	826.4	18.30	67.61
		4405	836.0	18.42	69.50
		4455	846.0	18.74	74.82
	UMTS, HSDPA	4357	826.4	17.43	55.34
		4405	836.0	17.55	56.89
		4455	846.0	17.87	61.24

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	23.07	202.77
		9800	1880.0	22.30	169.82
		9938	1907.6	22.88	194.09
	UMTS, HSDPA	9662	1852.4	22.03	159.59
		9800	1880.0	21.40	138.04
		9938	1907.6	21.98	157.76

Part 27 1700MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	22.41	174.18
		1638	1732.6	22.46	176.20
		1738	1752.5	22.37	172.58
	UMTS, HSDPA	1537	1712.4	21.51	141.58
		1638	1732.6	21.56	143.22
		1738	1752.5	21.47	140.28

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	18.04	63.68
		384	836.5	18.46	70.15
		777	848.3	18.58	72.11
	BC 0, EVDO Rev A	1013	824.7	18.19	65.92
		384	836.5	18.61	72.61
		777	848.3	18.73	74.64

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	22.63	183.23
		600	1880.0	22.68	185.35
		1175	1908.8	22.71	186.64
	BC1, EVDO REV A	25	1851.3	22.74	187.93
		600	1880.0	22.79	190.11
		1175	1908.8	22.82	191.43

Part 27 1700MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC15, 1xRTT	25	1711.3	22.15	164.06
		450	1732.5	22.46	176.20
		875	1753.8	22.29	169.43
	BC15, EVDO, REV A	25	1711.3	22.15	164.06
		450	1732.5	22.63	183.23
		875	1753.8	22.29	169.43

Part 90 800MHz Band					
Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	476	817.9	16.23	41.98
		526	819.2	17.20	52.48
		684	823.1	17.46	55.72
	BC10, EVDO A	476	817.9	16.41	43.75
		526	819.2	17.38	54.70
		684	823.1	17.64	58.08

CDMA2000 REV B				
Mode	Channel	f (MHz)	ERP (Average)	
			dBm	mW
EVDO Rev B Two Carriers Min.	1013+31	825.3	13.19	20.84
	384+425	837.2	13.34	21.58
	736+777	847.6	13.72	23.55
EVDO Rev B Two Carriers Max	1013+156	826.5	13.25	21.13
	384+550	838.8	13.22	20.99
	611+777	844.9	13.64	23.12
EVDO Rev B Three Carriers Min.	1013+31+72	825.9	13.21	20.94
	384+425+466	837.7	13.36	21.68
	695+736+777	846.7	13.74	23.66

10.1.3.LAT

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber D										
Project #:		14U17676								
Date:		06/25/14								
Test Engineer:		R.Z								
Configuration:		EUT only								
Mode:		GSM 850MHz								
Test Equipment:										
Receiving: Sunol T407, and Chamber D Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	23.50	V	0.6	0.0	22.88	25.03	38.45	40.60	-15.6	
824.20	28.97	H	0.6	0.0	28.35	30.50	38.45	40.60	-10.1	
Mid Ch										
836.60	23.40	V	0.6	0.0	22.78	24.93	38.45	40.60	-15.7	
836.60	28.52	H	0.6	0.0	27.90	30.05	38.45	40.60	-10.5	
High Ch										
848.80	22.31	V	0.6	0.0	21.69	23.84	38.45	40.60	-16.8	
848.80	28.60	H	0.6	0.0	27.98	30.13	38.45	40.60	-10.5	
Rev. 06.18.14										

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: EDGE 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	18.98	V	0.6	0.0	18.36	20.51	38.45	40.60	-20.1	
824.20	24.62	H	0.6	0.0	24.00	26.15	38.45	40.60	-14.4	
Mid Ch										
836.60	18.88	V	0.6	0.0	18.26	20.41	38.45	40.60	-20.2	
836.60	24.05	H	0.6	0.0	23.43	25.58	38.45	40.60	-15.0	
High Ch										
848.80	17.99	V	0.6	0.0	17.37	19.52	38.45	40.60	-21.1	
848.80	24.25	H	0.6	0.0	23.63	25.78	38.45	40.60	-14.8	

Rev. 06.18.14

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: GSM 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	22.5	V	0.98	7.88	29.41	33.0	-3.6	
1.851	24.6	H	0.98	7.88	31.46	33.0	-1.5	
Mid Ch								
1.880	22.7	V	0.98	7.86	29.55	33.0	-3.5	
1.880	25.0	H	0.98	7.86	31.86	33.0	-1.1	
High Ch								
1.910	23.4	V	0.98	7.84	30.29	33.0	-2.7	
1.910	25.5	H	0.98	7.84	32.40	33.0	-0.6	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: EDGE 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	19.7	V	0.98	7.88	26.61	33.0	-6.4	
1.851	21.7	H	0.98	7.88	28.58	33.0	-4.4	
Mid Ch								
1.880	19.9	V	0.98	7.86	26.75	33.0	-6.3	
1.880	22.1	H	0.98	7.86	28.98	33.0	-4.0	
High Ch								
1.910	20.6	V	0.98	7.84	27.49	33.0	-5.5	
1.910	22.7	H	0.98	7.84	29.52	33.0	-3.5	

Rev. 06.18.14

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 06/28/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: WCDMA Rel 99 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	14.19	V	0.6	0.0	13.57	15.72	38.45	40.60	-24.9	
826.40	20.09	H	0.6	0.0	19.47	21.62	38.45	40.60	-19.0	
Mid Ch										
836.00	14.37	V	0.6	0.0	13.75	15.90	38.45	40.60	-24.7	
836.00	20.52	H	0.6	0.0	19.90	22.05	38.45	40.60	-18.6	
High Ch										
846.00	13.39	V	0.6	0.0	12.77	14.92	38.45	40.60	-25.7	
846.00	20.81	H	0.6	0.0	20.19	22.34	38.45	40.60	-18.3	

Rev. 06.18.14

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 06/28/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: WCDMA HSDPA 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	13.34	V	0.6	0.0	12.72	14.87	38.45	40.60	-25.7	
826.40	19.24	H	0.6	0.0	18.62	20.77	38.45	40.60	-19.8	
Mid Ch										
836.00	13.52	V	0.6	0.0	12.90	15.05	38.45	40.60	-25.6	
836.00	19.67	H	0.6	0.0	19.05	21.20	38.45	40.60	-19.4	
High Ch										
846.00	12.54	V	0.6	0.0	11.92	14.07	38.45	40.60	-26.5	
846.00	19.96	H	0.6	0.0	19.34	21.49	38.45	40.60	-19.1	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/28/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: WCDMA Rel 99 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	20.1	V	0.98	7.88	27.00	33.0	-6.0	
1.852	20.7	H	0.98	7.88	27.58	33.0	-5.4	
Mid Ch								
1.880	19.4	V	0.98	7.86	26.24	33.0	-6.8	
1.880	20.7	H	0.98	7.86	27.63	33.0	-5.4	
High Ch								
1.908	20.2	V	0.98	7.84	27.01	33.0	-6.0	
1.908	20.9	H	0.98	7.84	27.72	33.0	-5.3	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/28/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: WCDMA HSDPA 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	19.2	V	0.98	7.88	26.08	33.0	-6.9	
1.852	19.8	H	0.98	7.88	26.66	33.0	-6.3	
Mid Ch								
1.880	18.4	V	0.98	7.86	25.32	33.0	-7.7	
1.880	19.8	H	0.98	7.86	26.71	33.0	-6.3	
High Ch								
1.908	19.2	V	0.98	7.84	26.09	33.0	-6.9	
1.908	19.9	H	0.98	7.84	26.80	33.0	-6.2	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/28/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: WCDMA Rel 99 1700MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	19.3	V	0.95	8.25	26.64	30.0	-3.4	
1.712	19.7	H	0.95	8.25	26.99	30.0	-3.0	
Mid Ch								
1.733	18.7	V	0.95	8.17	25.92	30.0	-4.1	
1.733	19.9	H	0.95	8.17	27.09	30.0	-2.9	
High Ch								
1.753	18.6	V	0.95	8.09	25.72	30.0	-4.3	
1.753	19.9	H	0.95	8.09	27.05	30.0	-3.0	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/28/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: WCDMA HSDPA 1700MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	18.4	V	0.95	8.25	25.74	30.0	-4.3	
1.712	18.8	H	0.95	8.25	26.09	30.0	-3.9	
Mid Ch								
1.733	17.8	V	0.95	8.17	25.02	30.0	-5.0	
1.733	19.0	H	0.95	8.17	26.19	30.0	-3.8	
High Ch								
1.753	17.7	V	0.95	8.09	24.82	30.0	-5.2	
1.753	19.0	H	0.95	8.09	26.15	30.0	-3.8	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA 1XRTT 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	15.30	V	0.6	0.0	14.68	16.83	38.45	40.60	-23.8	
824.70	20.67	H	0.6	0.0	20.05	22.20	38.45	40.60	-18.4	
Mid Ch										
836.52	15.30	V	0.6	0.0	14.68	16.83	38.45	40.60	-23.8	
836.52	21.02	H	0.6	0.0	20.40	22.55	38.45	40.60	-18.0	
High Ch										
848.31	14.31	V	0.6	0.0	13.69	15.84	38.45	40.60	-24.8	
848.31	21.00	H	0.6	0.0	20.38	22.53	38.45	40.60	-18.1	

Rev. 06.18.14

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 6/26/2014
Test Engineer: T wang
Configuration: EUT only
Mode: CDMA Rev A 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	14.48	V	0.6	0.0	13.86	16.01	38.45	40.60	-24.6	
824.70	20.28	H	0.6	0.0	19.66	21.81	38.45	40.60	-18.8	
Mid Ch										
836.52	13.91	V	0.6	0.0	13.29	15.44	38.45	40.60	-25.2	
836.52	20.50	H	0.6	0.0	19.88	22.03	38.45	40.60	-18.6	
High Ch										
848.31	14.26	V	0.6	0.0	13.64	15.79	38.45	40.60	-24.8	
848.31	20.92	H	0.6	0.0	20.30	22.45	38.45	40.60	-18.1	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA 1XRTT 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	19.4	V	0.98	7.88	26.26	33.0	-6.7	
1.851	20.7	H	0.98	7.88	27.62	33.0	-5.4	
Mid Ch								
1.880	19.3	V	0.98	7.86	26.23	33.0	-6.8	
1.880	20.5	H	0.98	7.86	27.34	33.0	-5.7	
High Ch								
1.909	19.8	V	0.98	7.84	26.67	33.0	-6.3	
1.909	20.9	H	0.98	7.84	27.78	33.0	-5.2	

Rev. 06.18.14

EVDO-Rev A, 1900MHz BC1

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Company:
Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA EVDO Rev A 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables
Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	19.5	V	0.98	7.88	26.38	33.0	-6.6	
1.851	20.8	H	0.98	7.88	27.74	33.0	-5.3	
Mid Ch								
1.880	19.5	V	0.98	7.86	26.35	33.0	-6.7	
1.880	20.6	H	0.98	7.86	27.46	33.0	-5.5	
High Ch								
1.909	19.9	V	0.98	7.84	26.79	33.0	-6.2	
1.909	21.0	H	0.98	7.84	27.90	33.0	-5.1	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA 1XRTT 1700MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	19.5	V	0.95	8.25	26.76	30.0	-3.2	
1.711	20.0	H	0.95	8.25	27.29	30.0	-2.7	
Mid Ch								
1.733	18.6	V	0.95	8.17	25.84	30.0	-4.2	
1.733	19.9	H	0.95	8.17	27.14	30.0	-2.9	
High Ch								
1.754	18.8	V	0.95	8.09	25.95	30.0	-4.1	
1.754	20.2	H	0.95	8.09	27.33	30.0	-2.7	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Company:**Project #:** 14U17676**Date:** 06/25/14**Test Engineer:** R.Z**Configuration:** EUT only**Mode:** CDMA Rev A 1700MHz**Test Equipment:**

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	19.7	V	0.95	8.25	26.96	30.0	-3.0	
1.711	20.2	H	0.95	8.25	27.49	30.0	-2.5	
Mid Ch								
1.733	18.8	V	0.95	8.17	26.04	30.0	-4.0	
1.733	20.1	H	0.95	8.17	27.34	30.0	-2.7	
High Ch								
1.754	19.0	V	0.95	8.09	26.15	30.0	-3.9	
1.754	20.4	H	0.95	8.09	27.53	30.0	-2.5	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 06/25/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA 1XRTT 800MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
817.25	15.88	V	0.6	0.0	15.26	17.41	38.45	40.60	-23.2	
817.25	20.80	H	0.6	0.0	20.18	22.33	38.45	40.60	-18.3	
Mid Ch										
820.00	16.00	V	0.6	0.0	15.38	17.53	38.45	40.60	-23.1	
820.00	20.88	H	0.6	0.0	20.26	22.41	38.45	40.60	-18.2	
High Ch										
822.75	15.90	V	0.6	0.0	15.28	17.43	38.45	40.60	-23.2	
822.75	20.90	H	0.6	0.0	20.28	22.43	38.45	40.60	-18.2	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber D

Project #: 14U17676
Date: 6/26/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: CDMA Rev A 800MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
817.25	15.67	V	0.6	0.0	15.05	17.20	38.45	40.60	-23.4	
817.25	20.74	H	0.6	0.0	20.12	22.27	38.45	40.60	-18.3	
Mid Ch										
820.00	15.79	V	0.6	0.0	15.17	17.32	38.45	40.60	-23.3	
820.00	20.80	H	0.6	0.0	20.18	22.33	38.45	40.60	-18.3	
High Ch										
822.75	15.69	V	0.6	0.0	15.07	17.22	38.45	40.60	-23.4	
822.75	20.84	H	0.6	0.0	20.22	22.37	38.45	40.60	-18.2	

Rev. 06.18.14

Two Carriers Min.**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 06/26/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA Rev B 2C Min Sep 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes
Low Ch									
825.3	12.13	V	0.6	0.0	11.51	13.66	38.5	-24.8	
825.3	17.30	H	0.6	0.0	16.68	18.83	38.5	-19.6	
Mid Ch									
837.2	12.07	V	0.6	0.0	11.45	13.60	38.5	-24.8	
837.2	17.45	H	0.6	0.0	16.83	18.98	38.5	-19.5	
High Ch									
847.6	11.64	V	0.6	0.0	11.02	13.17	38.5	-25.3	
847.6	17.83	H	0.6	0.0	17.21	19.36	38.5	-19.1	

Rev. 06.18.14

CDMA2000, REV B**Two Carriers Max**

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 06/26/14
Test Engineer: R. Z
Configuration: EUT only
Mode: CDMA Rev B 2C Max Sep 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes
Low Ch									
826.5	14.79	V	0.6	0.0	14.17	16.32	38.5	-22.1	
826.5	17.26	H	0.6	0.0	16.64	18.79	38.5	-19.7	
Mid Ch									
838.8	14.89	V	0.6	0.0	14.27	16.42	38.5	-22.0	
838.8	17.51	H	0.6	0.0	16.89	19.04	38.5	-19.4	
High Ch									
844.9	14.10	V	0.6	0.0	13.48	15.63	38.5	-22.8	
844.9	17.59	H	0.6	0.0	16.97	19.12	38.5	-19.3	

Rev. 06.18.14

CDMA2000, REV B

Three Carriers Min.

High Frequency Substitution Measurement UL Fremont Radiated Chamber D									
Project #:		14U17676							
Date:		06/26/14							
Test Engineer:		R.Z							
Configuration:		EUT only							
Mode:		CDMA Rev B 3C Min Sep 850MHz							
Test Equipment:									
Receiving: Sunol T407, and Chamber D Cable									
Substitution: Dipole S/N: 00022117, 8ft SMA Cable									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes
Low Ch									
825.9	12.09	V	0.6	0.0	11.47	13.62	38.5	-24.8	
825.9	16.86	H	0.6	0.0	16.24	18.39	38.5	-20.1	
Mid Ch									
837.7	11.99	V	0.6	0.0	11.37	13.52	38.5	-24.9	
837.7	17.05	H	0.6	0.0	16.43	18.58	38.5	-19.9	
High Ch									
846.7	11.48	V	0.6	0.0	10.86	13.01	38.5	-25.4	
846.7	16.93	H	0.6	0.0	16.31	18.46	38.5	-20.0	
Rev. 06.18.14									

10.1.4.UAT

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber E										
Project #:		14U17676								
Date:		6/25/2014								
Test Engineer:		T Wang								
Configuration:		EUT only								
Mode:		GSM 850MHz								
<u>Test Equipment:</u>										
Receiving: Sunol T408, and Chamber E Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	20.92	V	0.6	0.0	20.30	22.45	38.45	40.60	-18.1	
824.20	27.72	H	0.6	0.0	27.10	29.25	38.45	40.60	-11.3	
Mid Ch										
836.60	18.45	V	0.6	0.0	17.83	19.98	38.45	40.60	-20.6	
836.60	27.34	H	0.6	0.0	26.72	28.87	38.45	40.60	-11.7	
High Ch										
848.80	18.90	V	0.6	0.0	18.28	20.43	38.45	40.60	-20.2	
848.80	27.36	H	0.6	0.0	26.74	28.89	38.45	40.60	-11.7	
Rev. 06.18.14										

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber E**

Project #: 14U17676
Date: 6/25/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: EDGE 850MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	15.32	V	0.6	0.0	14.70	16.85	38.45	40.60	-23.7	
824.20	22.82	H	0.6	0.0	22.20	24.35	38.45	40.60	-16.2	
Mid Ch										
836.60	13.05	V	0.6	0.0	12.43	14.58	38.45	40.60	-26.0	
836.60	23.14	H	0.6	0.0	22.52	24.67	38.45	40.60	-15.9	
High Ch										
848.80	13.60	V	0.6	0.0	12.98	15.13	38.45	40.60	-25.5	
848.80	22.86	H	0.6	0.0	22.24	24.39	38.45	40.60	-16.2	

Rev. 06.18.14

GPRS 1900MHz BAND 2

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber E**

Project #: 14U17676
Date: 6/25/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: GSM 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	19.5	V	0.98	8.62	27.15	33.0	-5.9	
1.851	21.8	H	0.98	8.83	29.63	33.0	-3.4	
Mid Ch								
1.880	19.8	V	0.98	8.53	27.30	33.0	-5.7	
1.880	21.5	H	0.98	8.68	29.18	33.0	-3.8	
High Ch								
1.910	20.7	V	0.98	8.43	28.13	33.0	-4.9	
1.910	22.5	H	0.98	8.53	30.01	33.0	-3.0	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: EDGE 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	17.7	V	0.98	8.62	25.35	33.0	-7.7	
1.851	21.2	H	0.98	8.83	29.03	33.0	-4.0	
Mid Ch								
1.880	17.3	V	0.98	8.53	24.80	33.0	-8.2	
1.880	19.8	H	0.98	8.68	27.48	33.0	-5.5	
High Ch								
1.910	18.4	V	0.98	8.43	25.83	33.0	-7.2	
1.910	21.5	H	0.98	8.53	29.01	33.0	-4.0	

Rev. 06.18.14

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber E**

Company:**Project #:** 14U17676**Date:** 6/25/2014**Test Engineer:** F. Guarnero**Configuration:** EUT Only**Mode:** WCDMA Rel 99 850MHz**Test Equipment:****Receiving:** Sunol T408, and Chamber E Cable**Substitution:** Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	12.09	V	0.6	0.0	11.47	13.62	38.45	40.60	-27.0	
826.40	18.92	H	0.6	0.0	18.30	20.45	38.45	40.60	-20.1	
Mid Ch										
836.00	11.55	V	0.6	0.0	10.93	13.08	38.45	40.60	-27.5	
836.00	19.04	H	0.6	0.0	18.42	20.57	38.45	40.60	-20.0	
High Ch										
846.00	12.20	V	0.6	0.0	11.58	13.73	38.45	40.60	-26.9	
846.00	19.36	H	0.6	0.0	18.74	20.89	38.45	40.60	-19.7	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: WCDMA HSDPA 850MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	11.22	V	0.6	0.0	10.60	12.75	38.45	40.60	-27.8	
826.40	18.05	H	0.6	0.0	17.43	19.58	38.45	40.60	-21.0	
Mid Ch										
836.00	10.68	V	0.6	0.0	10.06	12.21	38.45	40.60	-28.4	
836.00	18.17	H	0.6	0.0	17.55	19.70	38.45	40.60	-20.9	
High Ch										
846.00	11.33	V	0.6	0.0	10.71	12.86	38.45	40.60	-27.7	
846.00	18.49	H	0.6	0.0	17.87	20.02	38.45	40.60	-20.6	

Rev. 10.24.13

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: F. Guarnero
Configuration: EUT Only
Mode: WCDMA Rel 99 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	13.6	V	0.98	8.62	21.20	33.0	-11.8	
1.852	15.2	H	0.98	8.83	23.07	33.0	-9.9	
Mid Ch								
1.880	11.7	V	0.98	8.53	19.30	33.0	-13.7	
1.880	14.6	H	0.98	8.68	22.30	33.0	-10.7	
High Ch								
1.908	13.2	V	0.98	8.43	20.63	33.0	-12.4	
1.908	15.3	H	0.98	8.53	22.88	33.0	-10.1	

Rev. 06.18.14

UMTS HSDPA, 1900MHz BAND 2**High Frequency Substitution Measurement
UL Fremont Radiated Chamber E**

Project #: 14U17676
Date: 6/25/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: WCDMA HSDPA 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	12.7	V	0.98	8.62	20.30	33.0	-12.7	
1.852	14.2	H	0.98	8.83	22.03	33.0	-11.0	
Mid Ch								
1.880	10.8	V	0.98	8.53	18.40	33.0	-14.6	
1.880	13.7	H	0.98	8.68	21.40	33.0	-11.6	
High Ch								
1.908	12.3	V	0.98	8.43	19.73	33.0	-13.3	
1.908	14.4	H	0.98	8.53	21.98	33.0	-11.0	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: F. Guarnero
Configuration: EUT Only
Mode: WCDMA Rel 99 1700MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	13.4	V	0.95	8.40	20.89	30.0	-9.1	
1.712	14.8	H	0.95	8.57	22.41	30.0	-7.6	
Mid Ch								
1.733	12.9	V	0.95	8.50	20.47	30.0	-9.5	
1.733	14.7	H	0.95	8.70	22.46	30.0	-7.5	
High Ch								
1.753	12.6	V	0.95	8.59	20.21	30.0	-9.8	
1.753	14.5	H	0.95	8.82	22.37	30.0	-7.6	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: WCDMA HSDPA 1700MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	12.5	V	0.95	8.40	19.99	30.0	-10.0	
1.712	13.9	H	0.95	8.57	21.51	30.0	-8.5	
Mid Ch								
1.733	12.0	V	0.95	8.50	19.57	30.0	-10.4	
1.733	13.8	H	0.95	8.70	21.56	30.0	-8.4	
High Ch								
1.753	11.7	V	0.95	8.59	19.31	30.0	-10.7	
1.753	13.6	H	0.95	8.82	21.47	30.0	-8.5	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 06/25/14
Test Engineer: T Wang
Configuration: EUT only
Mode: CDMA 1XRTT 850MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	12.46	V	0.6	0.0	11.84	13.99	38.45	40.60	-26.6	
824.70	18.66	H	0.6	0.0	18.04	20.19	38.45	40.60	-20.4	
Mid Ch										
836.52	12.29	V	0.6	0.0	11.67	13.82	38.45	40.60	-26.8	
836.52	19.08	H	0.6	0.0	18.46	20.61	38.45	40.60	-20.0	
High Ch										
848.31	12.84	V	0.6	0.0	12.22	14.37	38.45	40.60	-26.2	
848.31	19.20	H	0.6	0.0	18.58	20.73	38.45	40.60	-19.9	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: CDMA Rev A 850MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	12.61	V	0.6	0.0	11.99	14.14	38.45	40.60	-26.5	
824.70	18.81	H	0.6	0.0	18.19	20.34	38.45	40.60	-20.3	
Mid Ch										
836.52	12.44	V	0.6	0.0	11.82	13.97	38.45	40.60	-26.6	
836.52	19.23	H	0.6	0.0	18.61	20.76	38.45	40.60	-19.8	
High Ch										
848.31	12.99	V	0.6	0.0	12.37	14.52	38.45	40.60	-26.1	
848.31	19.35	H	0.6	0.0	18.73	20.88	38.45	40.60	-19.7	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: CDMA 1XRTT 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	12.6	V	0.98	8.62	20.25	33.0	-12.8	
1.851	14.8	H	0.98	8.83	22.63	33.0	-10.4	
Mid Ch								
1.880	12.0	V	0.98	8.53	19.50	33.0	-13.5	
1.880	15.0	H	0.98	8.68	22.68	33.0	-10.3	
High Ch								
1.910	13.6	V	0.98	8.43	21.03	33.0	-12.0	
1.910	15.2	H	0.98	8.53	22.71	33.0	-10.3	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/26/2014
Test Engineer: T Wang
Configuration: EUT only
Mode: CDMA Rev A 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	12.7	V	0.98	8.62	20.36	33.0	-12.6	
1.851	14.9	H	0.98	8.83	22.74	33.0	-10.3	
Mid Ch								
1.880	12.1	V	0.98	8.53	19.61	33.0	-13.4	
1.880	15.1	H	0.98	8.68	22.79	33.0	-10.2	
High Ch								
1.910	13.7	V	0.98	8.43	21.14	33.0	-11.9	
1.910	15.3	H	0.98	8.53	22.82	33.0	-10.2	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA Rev 0/A 1700MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	14.1	V	0.95	8.40	21.52	30.0	-8.5	
1.711	14.5	H	0.95	8.57	22.15	30.0	-7.8	
Mid Ch								
1.733	14.3	V	0.95	8.50	21.87	30.0	-8.1	
1.733	14.7	H	0.95	8.70	22.46	30.0	-7.5	
High Ch								
1.754	13.9	V	0.95	8.59	21.51	30.0	-8.5	
1.754	14.4	H	0.95	8.82	22.29	30.0	-7.7	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA Rev 0/A 1700MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables

Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	14.1	V	0.95	8.40	21.52	30.0	-8.5	
1.711	14.5	H	0.95	8.57	22.15	30.0	-7.8	
Mid Ch								
1.733	14.3	V	0.95	8.50	21.87	30.0	-8.1	
1.733	14.9	H	0.95	8.70	22.63	30.0	-7.4	
High Ch								
1.754	13.9	V	0.95	8.59	21.51	30.0	-8.5	
1.754	14.4	H	0.95	8.82	22.29	30.0	-7.7	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
 Date: 6/25/2014
 Test Engineer: T Wang
 Configuration: EUT only
 Mode: CDMA 1XRTT 800MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
817.90	11.31	V	0.6	0.0	10.69	12.84	38.45	40.60	-27.8	
817.90	16.85	H	0.6	0.0	16.23	18.38	38.45	40.60	-22.2	
Mid Ch										
819.15	11.80	V	0.6	0.0	11.18	13.33	38.45	40.60	-27.3	
819.15	17.82	H	0.6	0.0	17.20	19.35	38.45	40.60	-21.2	
High Ch										
824.10	11.50	V	0.6	0.0	10.88	13.03	38.45	40.60	-27.6	
824.10	18.08	H	0.6	0.0	17.46	19.61	38.45	40.60	-21.0	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber E

Project #: 14U17676
Date: 6/25/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA Rev A 800MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable
 Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIR{ (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
817.90	11.49	V	0.6	0.0	10.87	13.02	38.45	40.60	-27.6	
817.90	17.03	H	0.6	0.0	16.41	18.56	38.45	40.60	-22.0	
Mid Ch										
819.15	11.98	V	0.6	0.0	11.36	13.51	38.45	40.60	-27.1	
819.15	18.00	H	0.6	0.0	17.38	19.53	38.45	40.60	-21.1	
High Ch										
824.10	11.68	V	0.6	0.0	11.06	13.21	38.45	40.60	-27.4	
824.10	18.26	H	0.6	0.0	17.64	19.79	38.45	40.60	-20.8	

Rev. 06.18.14

Two Carriers Min.**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 06/26/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA Rev B 2C Min Sep 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes
Low Ch									
825.3	8.64	V	0.6	0.0	8.02	10.17	38.5	-28.3	
825.3	13.81	H	0.6	0.0	13.19	15.34	38.5	-23.1	
Mid Ch									
837.2	8.58	V	0.6	0.0	7.96	10.11	38.5	-28.3	
837.2	13.96	H	0.6	0.0	13.34	15.49	38.5	-23.0	
High Ch									
847.6	8.15	V	0.6	0.0	7.53	9.68	38.5	-28.8	
847.6	14.34	H	0.6	0.0	13.72	15.87	38.5	-22.6	

Rev. 06.18.14

CDMA2000, REV B,

Two Carriers Max

High Frequency Substitution Measurement UL Fremont Radiated Chamber E										
Company:										
Project #: 14U17676										
Date: 07/24/14										
Test Engineer: R.Z										
Configuration: EUT only										
Mode: CDMA Rev B 2C Max Sep 850MHz										
Test Equipment:										
Receiving: Sunol T408, and Chamber E Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.7 + 829.68MHz	8.57	V	0.6	0.0	7.95	10.10	38.45	40.60	-30.5	
824.7 + 829.68MHz	13.87	H	0.6	0.0	13.25	15.40	38.45	40.60	-25.2	
Mid Ch										
836.52+841.50MHz	8.15	V	0.6	0.0	7.53	9.68	38.45	40.60	-30.9	
836.52+841.50MHz	13.84	H	0.6	0.0	13.22	15.37	38.45	40.60	-25.2	
High Ch										
843.33+848.31MHz	8.75	V	0.6	0.0	8.13	10.28	38.45	40.60	-30.3	
843.33+848.31MHz	14.26	H	0.6	0.0	13.64	15.79	38.45	40.60	-24.8	
Rev. 06.18.14										

Three Carriers Min.**High Frequency Substitution Measurement
UL Fremont Radiated Chamber D**

Project #: 14U17676
Date: 06/26/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA Rev B 3C Min Sep 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes
Low Ch									
825.9	8.66	V	0.6	0.0	8.04	10.19	38.5	-28.3	
825.9	13.83	H	0.6	0.0	13.21	15.36	38.5	-23.1	
Mid Ch									
837.7	8.60	V	0.6	0.0	7.98	10.13	38.5	-28.3	
837.7	13.98	H	0.6	0.0	13.36	15.51	38.5	-22.9	
High Ch									
846.7	8.17	V	0.6	0.0	7.55	9.70	38.5	-28.7	
846.7	14.36	H	0.6	0.0	13.74	15.89	38.5	-22.6	

Rev. 06.18.14

10.2. PEAK-TO-AVERAGE RATIO

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

Peak-To-Average Ratio:

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM850	GPRS	33.23	33.15	0.08
Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM850	EGPRS	31.73	28.74	2.99
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM1900	GPRS	29.86	29.63	0.23
Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM1900	EGPRS	30.54	27.86	2.68
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS B2	REL99	28.56	25.34	3.22
Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS B2	HSDPA	27.93	23.72	4.21
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS B5	REL99	28.67	25.43	3.24
Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS B5	HSDPA	28.24	24.01	4.23
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS B4	REL99	28.46	25.23	3.23
Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS B4	HSDPA	27.6	23.18	4.42
*Peak Reading = Average Reading + Peak-to-Average Ratio				


Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC0	1xRTT	29.79	25.36	4.43
Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC0	EVDO A	29.68	25.38	4.3
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC1	1xRTT	29.53	24.82	4.71
Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC1	EVDO A	30.1	25.32	4.78
*Peak Reading = Average Reading + Peak-to-Average Ratio				


Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC15	1xRTT	29.8	25.43	4.37
Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC15	EVDO A	29.49	25.21	4.28
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC10	1xRTT	29.43	25.3	4.13
Mode	Ch. No.	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
BC10	EVDO A	29.52	25.44	4.08
*Peak Reading = Average Reading + Peak-to-Average Ratio				


GSM850, GPRS

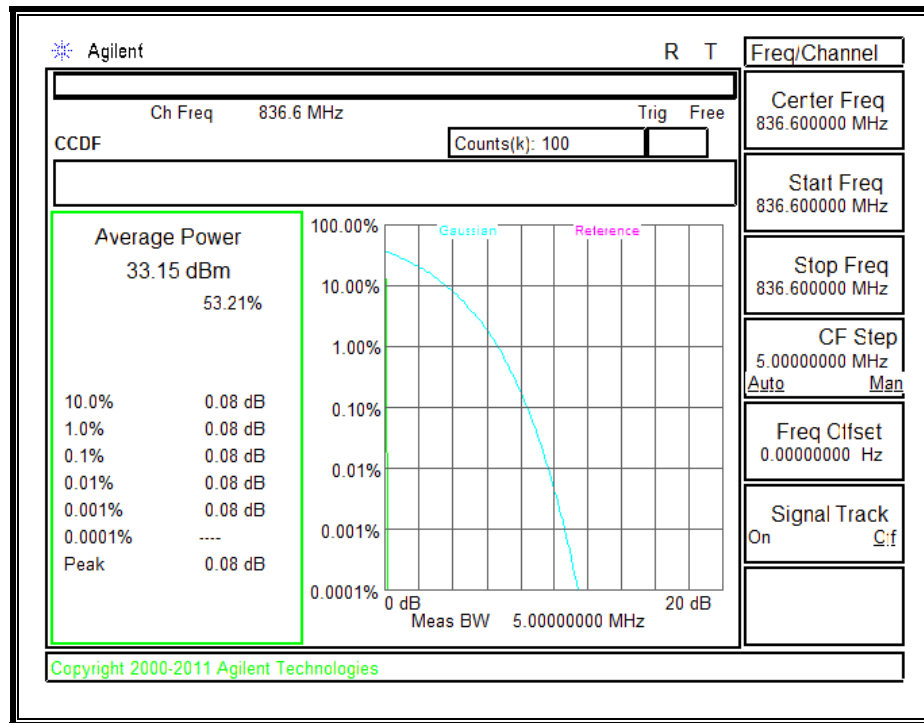


GSM850, EGPRS

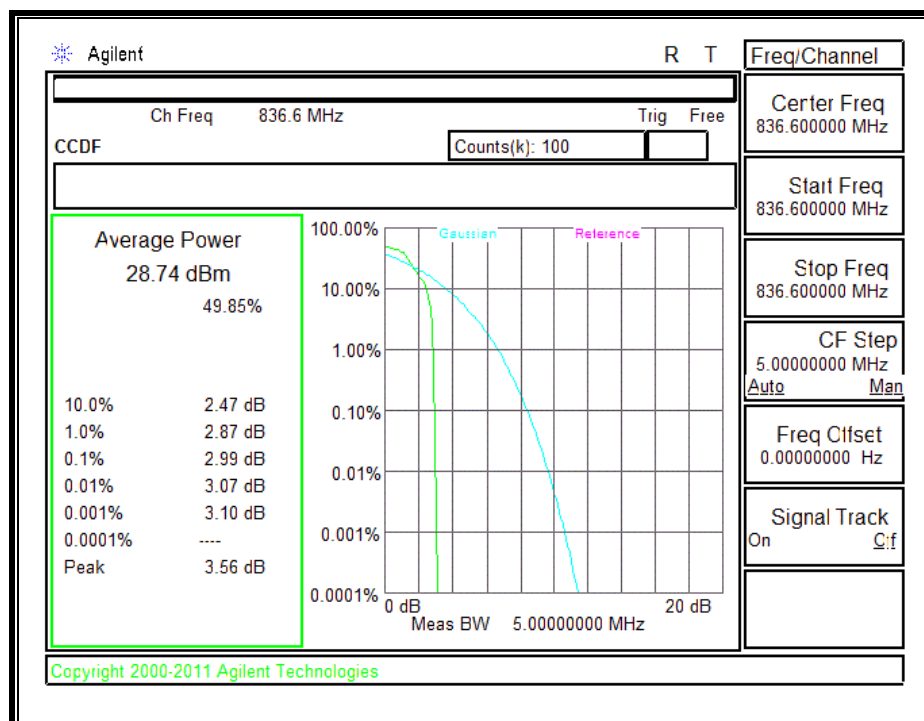


GSM1900, GPRS

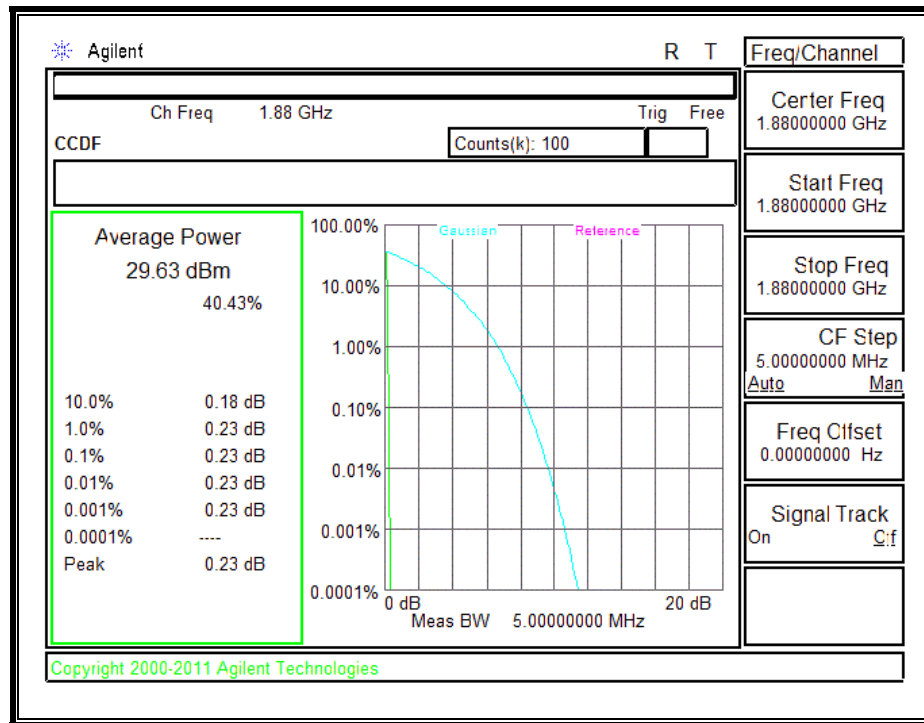


GSM1900, EGPRS

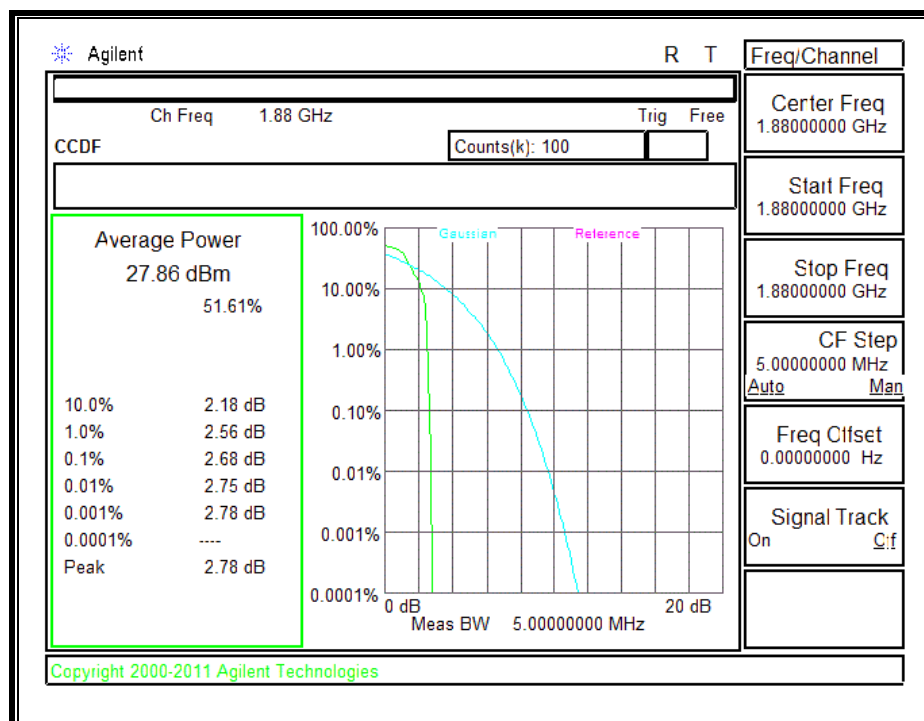


UMTS850, REL 99 BAND 2

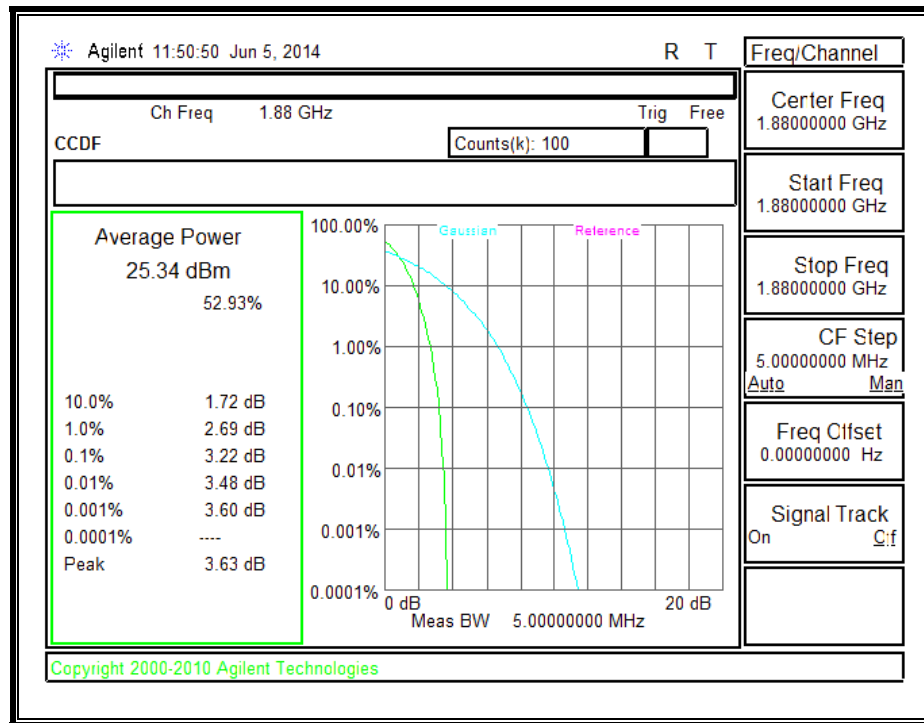


UMTS850, HSDPA BAND 2

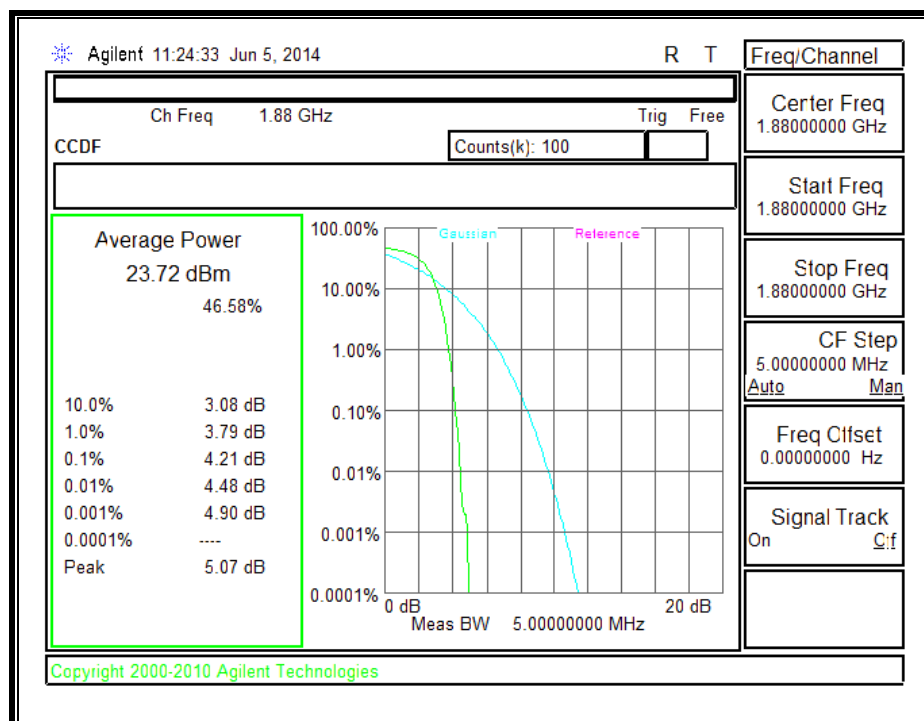


UMTS850, REL 99 BAND 5

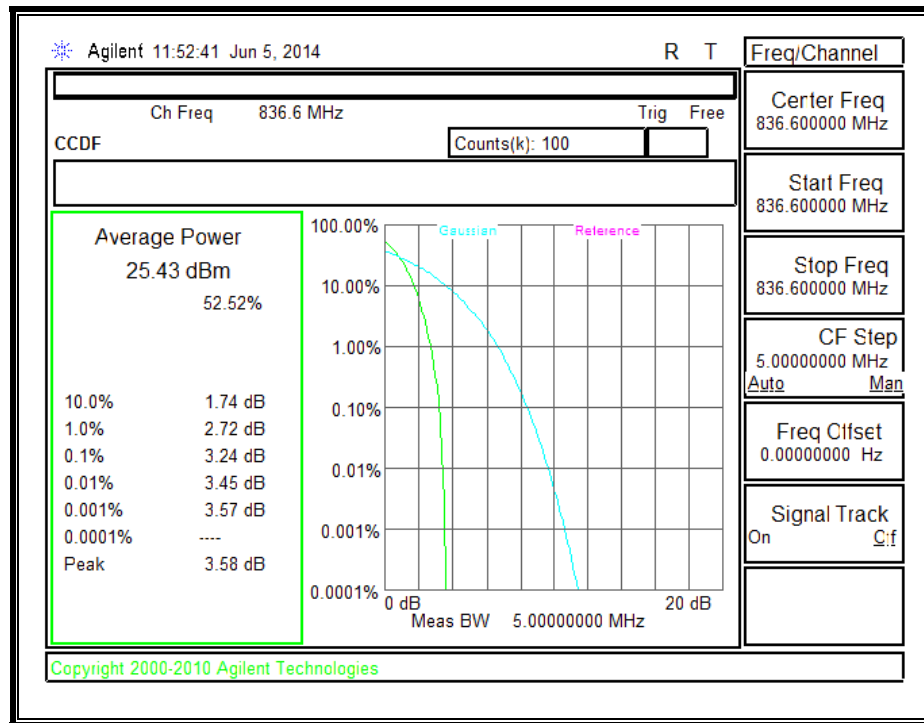


UMTS850, HSDPA BAND 5

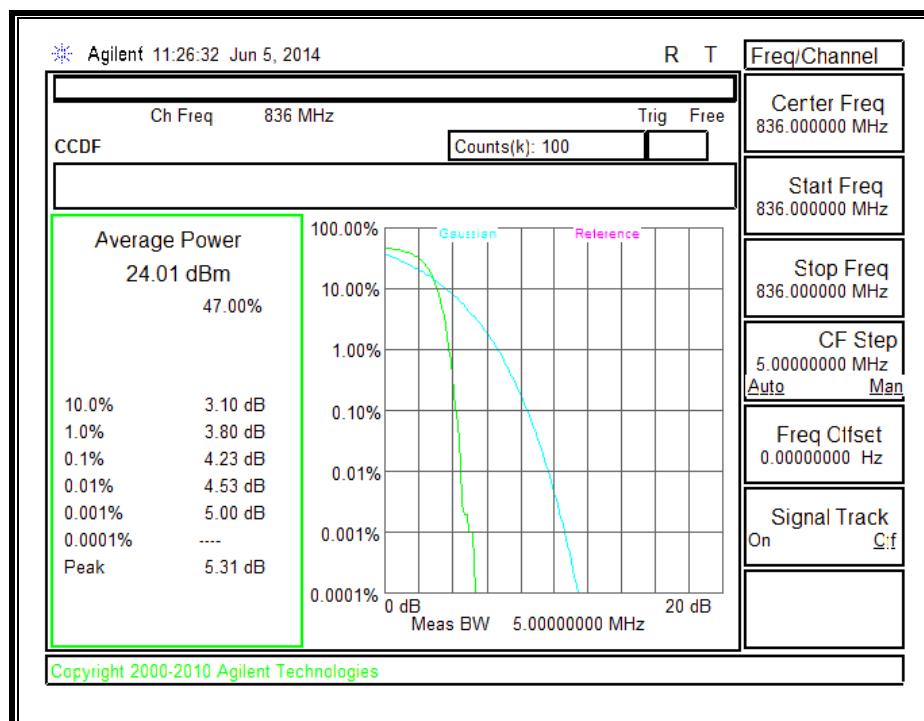


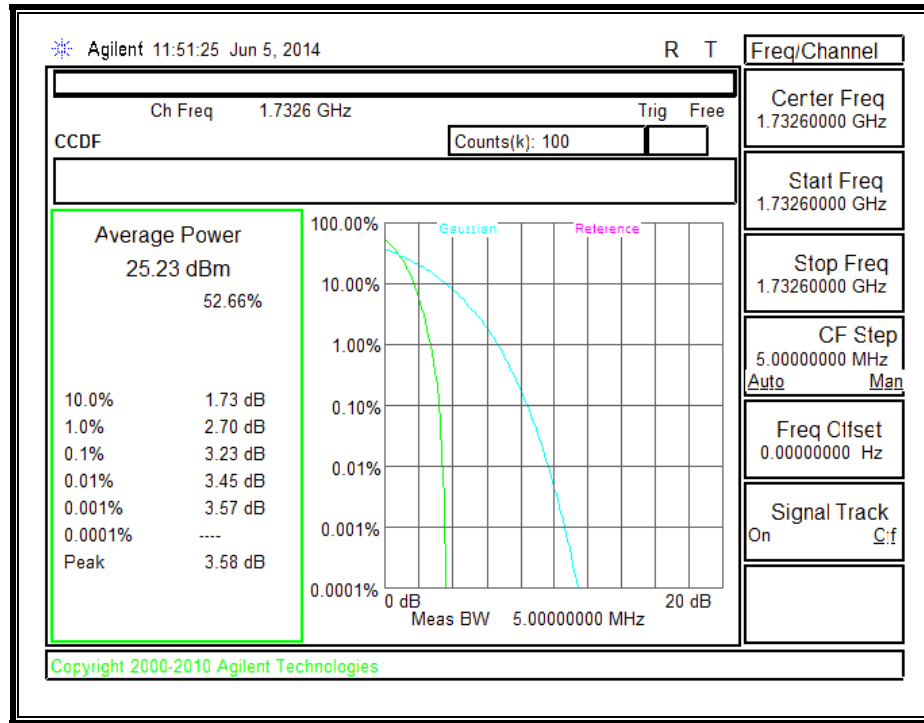


UMTS850, HSDPA BAND 4

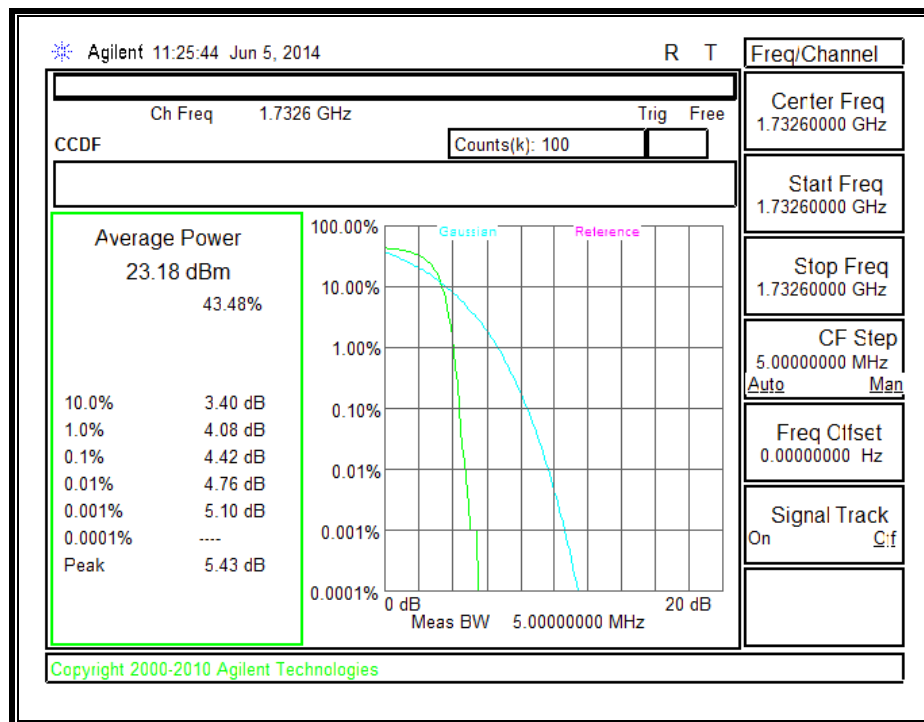


BC 0, 1xRTT

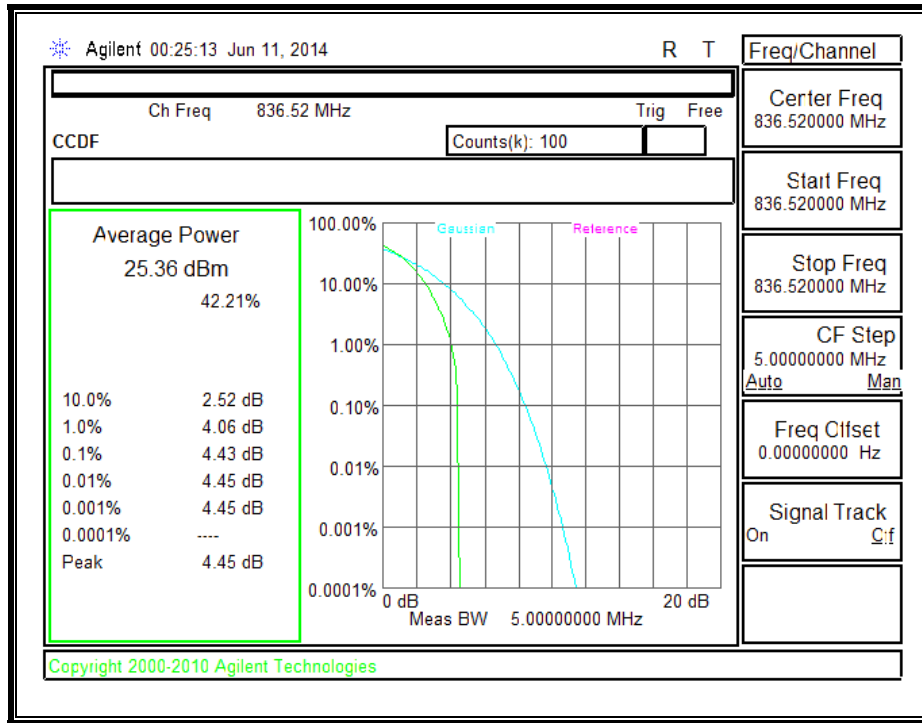


BC 0, EVDO A

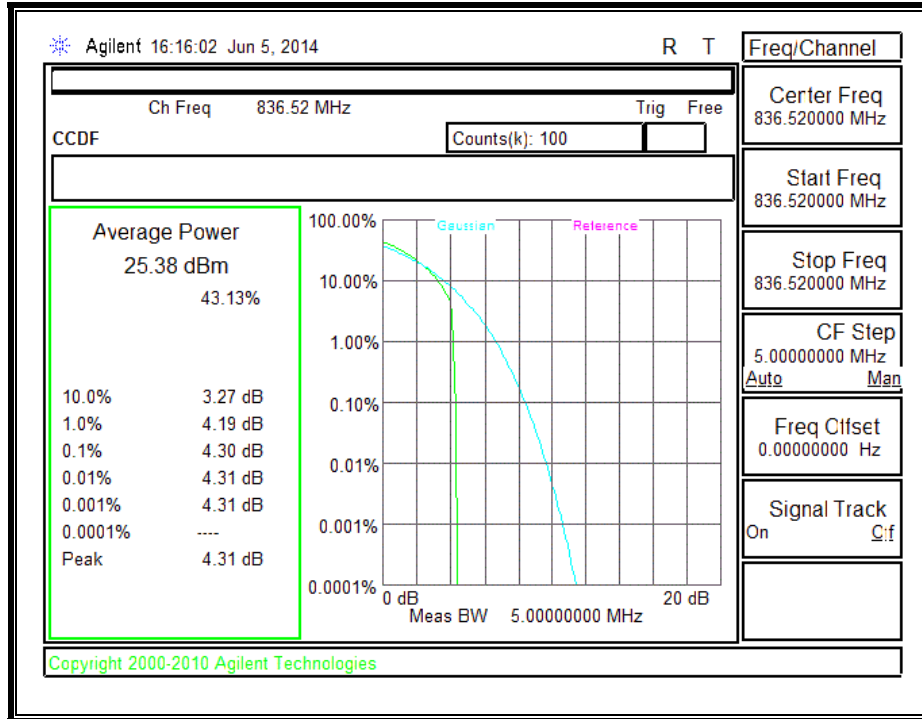


BC 1, 1xRTT

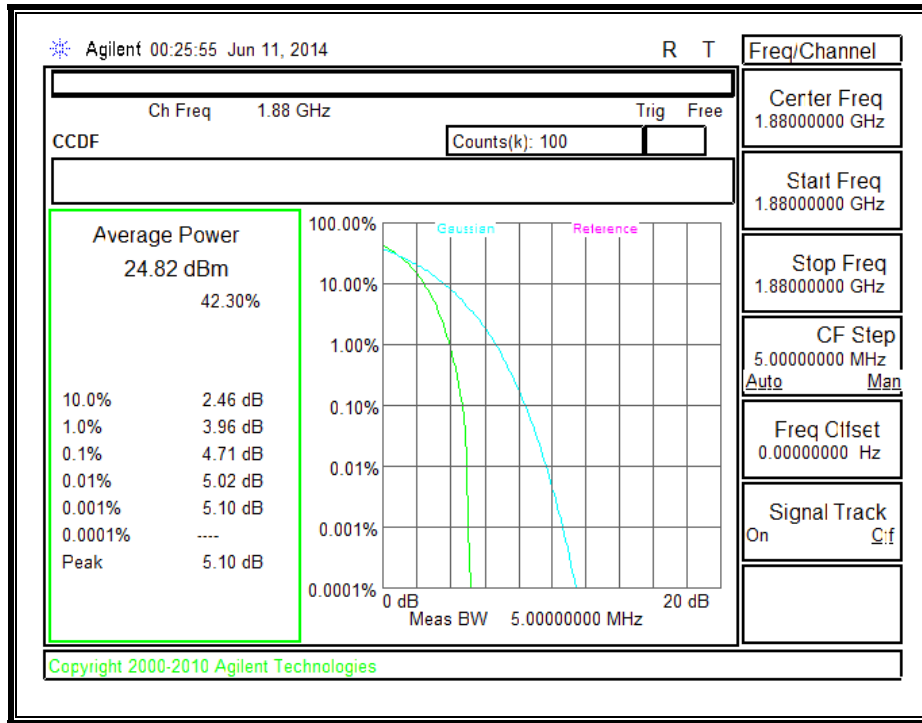


BC 1, EVDO A

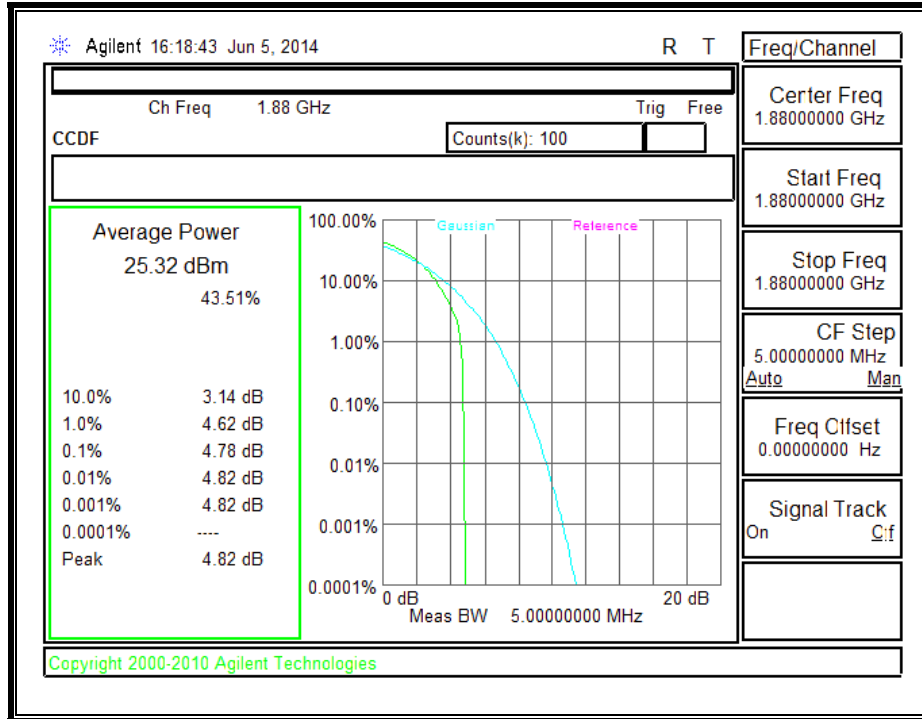


BC 15, 1xRTT

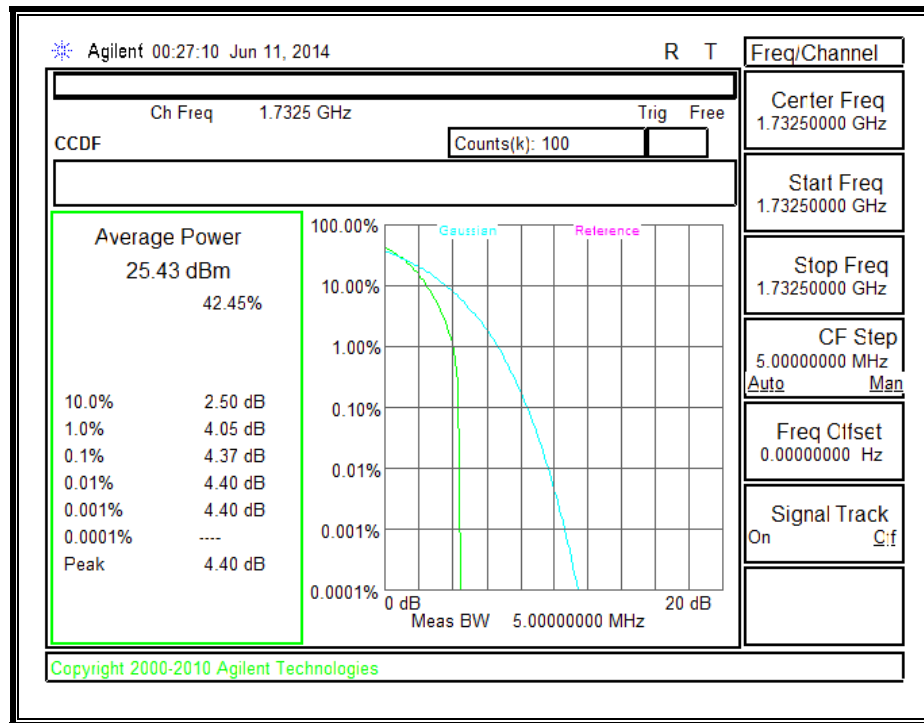


BC 15, EVDO A

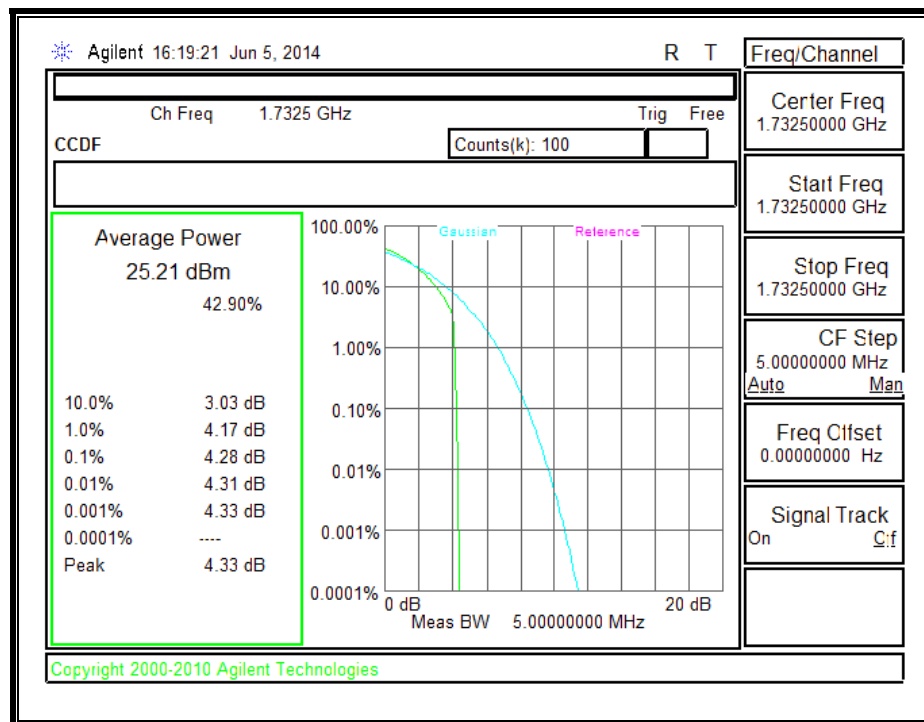

BC10, 1xRTT

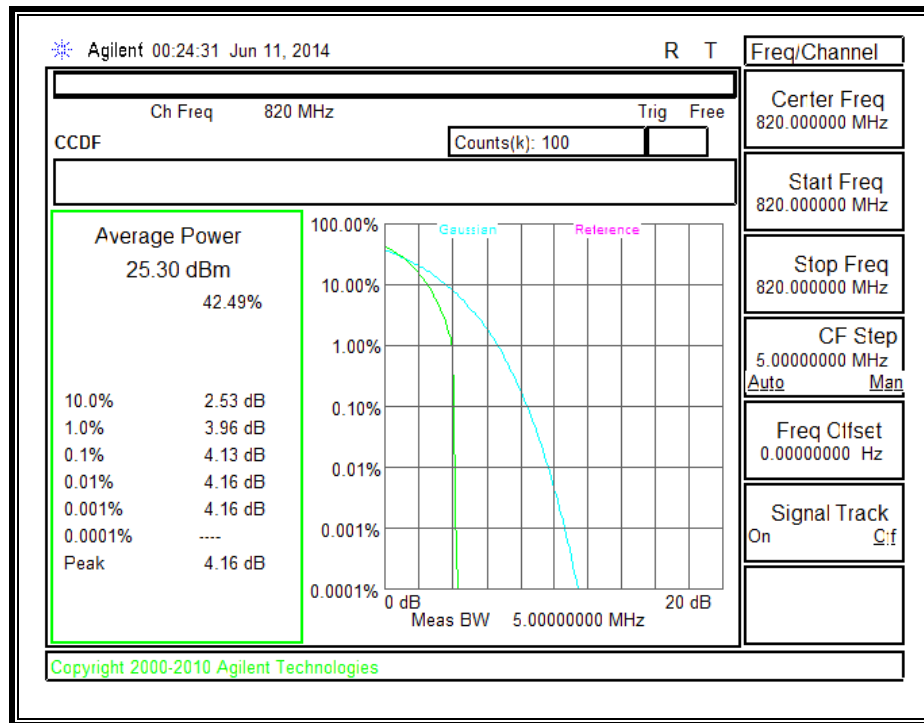

BC10, EVDO A

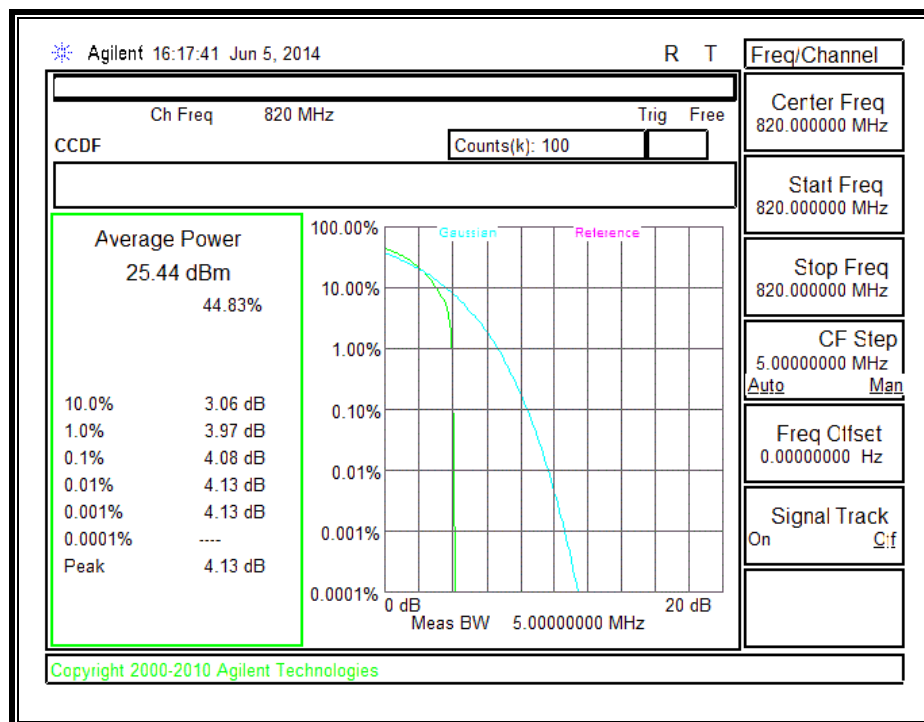

10.3. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and § 90.691.

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB

§ 90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10} (f/6.1)$ decibels or $50 + 10 \log_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve

measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The

emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

- GPRS/EGPRS.
- UMTS, REL 99 and HSDPA
- CDMA2000, BC0, BC1, BC10 and BC15

RESULTS

10.3.1.LAT

GPRS, 850MHz BAND 5

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/21/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: GPRS 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 [Empty]

Limit
 RSS 132

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)									
1.648	2.6	H	3.0	37.6	1.0	-34.0	-13.0	-21.0	
2.472	-11.4	H	3.0	38.0	1.0	-48.4	-13.0	-35.4	
1.648	-0.1	V	3.0	37.6	1.0	-36.7	-13.0	-23.7	
2.472	-11.0	V	3.0	38.0	1.0	-48.0	-13.0	-35.0	
Mid Channel (836.6MHz)									
1.673	-0.5	H	3.0	37.6	1.0	-37.1	-13.0	-24.1	
2.510	-10.0	H	3.0	37.9	1.0	-46.9	-13.0	-33.9	
1.673	0.5	V	3.0	37.6	1.0	-36.1	-13.0	-23.1	
2.510	-9.4	V	3.0	37.9	1.0	-46.4	-13.0	-33.4	
High Channel (848.8MHz)									
1.698	-7.1	H	3.0	37.6	1.0	-43.7	-13.0	-30.7	
2.546	-6.9	H	3.0	38.0	1.0	-43.9	-13.0	-30.9	
1.698	-5.0	V	3.0	37.6	1.0	-41.6	-13.0	-28.6	
2.546	-8.1	V	3.0	38.0	1.0	-45.0	-13.0	-32.0	

Rev. 03.03.14

EGPRS, 850MHz BAND 5

**3m Radiated Emissions Chamber
 Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/21/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: EGPRS 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 [Empty]

Limit
 Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)									
1.648	-4.3	H	3.0	37.6	1.0	-40.9	-13.0	-27.9	
2.472	-15.7	H	3.0	38.0	1.0	-52.6	-13.0	-39.6	
1.648	-5.5	V	3.0	37.6	1.0	-42.1	-13.0	-29.1	
2.472	-13.2	V	3.0	38.0	1.0	-50.2	-13.0	-37.2	
Mid Channel (836.6MHz)									
1.673	-1.1	H	3.0	37.6	1.0	-37.7	-13.0	-24.7	
2.510	-14.3	H	3.0	37.9	1.0	-51.2	-13.0	-38.2	
1.673	-2.3	V	3.0	37.6	1.0	-38.9	-13.0	-25.9	
2.510	-12.5	V	3.0	37.9	1.0	-49.5	-13.0	-36.5	
High Channel (848.8MHz)									
1.698	-4.9	H	3.0	37.6	1.0	-41.5	-13.0	-28.5	
2.546	-11.5	H	3.0	38.0	1.0	-48.5	-13.0	-35.5	
1.698	-12.1	V	3.0	37.6	1.0	-48.7	-13.0	-35.7	
2.546	-9.9	V	3.0	38.0	1.0	-46.9	-13.0	-33.9	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/26/14
Test Engineer: E. Yu
Configuration: EUT only
Mode: GPRS 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)									
3.700	-11.1	H	3.0	36.3	1.0	-46.4	-13.0	-33.4	
5.551	-12.5	H	3.0	35.6	1.0	-47.0	-13.0	-34.0	
3.700	-11.6	V	3.0	36.3	1.0	-46.9	-13.0	-33.9	
5.551	-12.0	V	3.0	35.6	1.0	-46.5	-13.0	-33.5	
Mid Channel (1880.0)									
3.760	-10.2	H	3.0	36.3	1.0	-45.5	-13.0	-32.5	
5.640	-12.1	H	3.0	35.6	1.0	-46.7	-13.0	-33.7	
3.760	-9.9	V	3.0	36.3	1.0	-45.2	-13.0	-32.2	
5.640	-11.9	V	3.0	35.6	1.0	-46.5	-13.0	-33.5	
High Channel (1909.8MHz)									
3.820	-9.5	H	3.0	36.3	1.0	-44.7	-13.0	-31.7	
5.729	-9.0	H	3.0	35.6	1.0	-43.6	-13.0	-30.6	
3.820	-9.1	V	3.0	36.3	1.0	-44.4	-13.0	-31.4	
5.729	-9.0	V	3.0	35.6	1.0	-43.6	-13.0	-30.6	

Rev. 03.03.14

EGPRS, 1900MHz BAND 2

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement									
Project #:		14U17676							
Date:		06/26/14							
Test Engineer:		E. Yu							
Configuration:		EUT only							
Mode:		EGPRS 1900MHz							
Test Equipment:									
Substitution: Horn T59 Substitution, and 8ft SMA Cable									
Chamber		Pre-amplifier		Filter		Limit			
3m Chamber F		3m Chamber F				Part 24			
Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)									
3.700	-13.3	H	3.0	36.3	1.0	-48.6	-13.0	-35.6	
5.551	-13.5	H	3.0	35.6	1.0	-48.1	-13.0	-35.1	
3.700	-13.7	V	3.0	36.3	1.0	-49.0	-13.0	-36.0	
5.551	-11.3	V	3.0	35.6	1.0	-45.9	-13.0	-32.9	
Mid Channel (1880.0)									
3.760	-12.2	H	3.0	36.3	1.0	-47.5	-13.0	-34.5	
5.640	-11.4	H	3.0	35.6	1.0	-46.0	-13.0	-33.0	
3.760	-12.1	V	3.0	36.3	1.0	-47.4	-13.0	-34.4	
5.640	-11.6	V	3.0	35.6	1.0	-46.2	-13.0	-33.2	
High Channel (1909.8MHz)									
3.820	-10.2	H	3.0	36.3	1.0	-45.5	-13.0	-32.5	
5.729	-9.0	H	3.0	35.6	1.0	-43.6	-13.0	-30.6	
3.820	-9.7	V	3.0	36.3	1.0	-45.0	-13.0	-32.0	
5.729	-5.5	V	3.0	35.6	1.0	-40.1	-13.0	-27.1	
Rev. 03.03.14									

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: Band 5 REL 99, 850MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		RSS 132

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)									
1.653	-21.5	H	3.0	34.9	1.0	-55.4	-13.0	-42.4	
2.479	-19.1	H	3.0	35.4	1.0	-53.5	-13.0	-40.5	
3.306	-18.7	H	3.0	36.4	1.0	-54.1	-13.0	-41.1	
1.653	-17.8	V	3.0	34.9	1.0	-51.7	-13.0	-38.7	
2.479	-18.7	V	3.0	35.4	1.0	-53.0	-13.0	-40.0	
3.306	-17.9	V	3.0	36.4	1.0	-53.3	-13.0	-40.3	
Mid Channel (836MHz)									
1.672	-21.4	H	3.0	34.9	1.0	-55.3	-13.0	-42.3	
2.508	-20.6	H	3.0	35.3	1.0	-54.9	-13.0	-41.9	
3.344	-18.2	H	3.0	36.4	1.0	-53.6	-13.0	-40.6	
1.672	-18.7	V	3.0	34.9	1.0	-52.6	-13.0	-39.6	
2.508	-15.8	V	3.0	35.3	1.0	-50.0	-13.0	-37.0	
3.344	-17.6	V	3.0	36.4	1.0	-53.0	-13.0	-40.0	
High Channel (846.6MHz)									
1.693	-23.7	H	3.0	34.9	1.0	-57.6	-13.0	-44.6	
2.540	-19.1	H	3.0	35.4	1.0	-53.4	-13.0	-40.4	
3.386	-18.8	H	3.0	36.4	1.0	-54.2	-13.0	-41.2	
1.693	-15.6	V	3.0	34.9	1.0	-49.4	-13.0	-36.4	
2.540	-18.9	V	3.0	35.4	1.0	-53.3	-13.0	-40.3	
3.386	-17.6	V	3.0	36.4	1.0	-53.0	-13.0	-40.0	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Company:
Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: Band 5 HSDPA, 850MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)									
1.653	-22.1	H	3.0	34.9	1.0	-56.0	-13.0	-43.0	
2.479	-16.7	H	3.0	35.4	1.0	-51.1	-13.0	-38.1	
3.306	-19.1	H	3.0	36.4	1.0	-54.6	-13.0	-41.6	
1.653	-20.6	V	3.0	34.9	1.0	-54.5	-13.0	-41.5	
2.479	-18.6	V	3.0	35.4	1.0	-52.9	-13.0	-39.9	
3.306	-18.5	V	3.0	36.4	1.0	-53.9	-13.0	-40.9	
Mid Channel (836MHz)									
1.672	-23.3	H	3.0	34.9	1.0	-57.2	-13.0	-44.2	
2.508	-19.3	H	3.0	35.3	1.0	-53.6	-13.0	-40.6	
3.344	-19.1	H	3.0	36.4	1.0	-54.5	-13.0	-41.5	
1.672	-20.5	V	3.0	34.9	1.0	-54.4	-13.0	-41.4	
2.508	-18.5	V	3.0	35.3	1.0	-52.8	-13.0	-39.8	
3.344	-17.1	V	3.0	36.4	1.0	-52.5	-13.0	-39.5	
High Channel (846.6MHz)									
1.693	-22.9	H	3.0	34.9	1.0	-56.8	-13.0	-43.8	
2.540	-19.2	H	3.0	35.4	1.0	-53.6	-13.0	-40.6	
3.386	-17.7	H	3.0	36.4	1.0	-53.1	-13.0	-40.1	
1.693	-14.1	V	3.0	34.9	1.0	-48.0	-13.0	-35.0	
2.540	-15.4	V	3.0	35.4	1.0	-49.8	-13.0	-36.8	
3.386	-17.5	V	3.0	36.4	1.0	-52.9	-13.0	-39.9	

Rev. 03.03.14

UMTS REL 99, 1900MHz BAND 2**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: Band 2 REL 99, 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)									
3.705	-16.0	H	3.0	36.3	1.0	-51.3	-13.0	-38.3	
5.557	-16.2	H	3.0	35.6	1.0	-50.7	-13.0	-37.7	
3.705	-14.6	V	3.0	36.3	1.0	-49.9	-13.0	-36.9	
5.557	-16.5	V	3.0	35.6	1.0	-51.1	-13.0	-38.1	
Mid Channel (1880MHz)									
3.760	-16.1	H	3.0	36.3	1.0	-51.4	-13.0	-38.4	
5.640	-16.7	H	3.0	35.6	1.0	-51.2	-13.0	-38.2	
3.760	-15.0	V	3.0	36.3	1.0	-50.3	-13.0	-37.3	
5.640	-15.8	V	3.0	35.6	1.0	-50.4	-13.0	-37.4	
High Channel (1907.6MHz)									
3.815	-16.1	H	3.0	36.3	1.0	-51.4	-13.0	-38.4	
5.723	-16.2	H	3.0	35.6	1.0	-50.8	-13.0	-37.8	
3.815	-16.0	V	3.0	36.3	1.0	-51.2	-13.0	-38.2	
5.723	-15.7	V	3.0	35.6	1.0	-50.3	-13.0	-37.3	

Rev. 03.03.14

UMTS HSDPA, 1900MHz BAND 2**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: Band 2 HSDPA, 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)									
3.705	-16.1	H	3.0	36.3	1.0	-51.4	-13.0	-38.4	
5.557	-15.2	H	3.0	35.6	1.0	-49.8	-13.0	-36.8	
3.705	-14.9	V	3.0	36.3	1.0	-50.2	-13.0	-37.2	
5.557	-15.7	V	3.0	35.6	1.0	-50.3	-13.0	-37.3	
Mid Channel (1880MHz)									
3.760	-15.0	H	3.0	36.3	1.0	-50.3	-13.0	-37.3	
5.640	-16.7	H	3.0	35.6	1.0	-51.3	-13.0	-38.3	
3.760	-15.6	V	3.0	36.3	1.0	-50.9	-13.0	-37.9	
5.640	-15.7	V	3.0	35.6	1.0	-50.3	-13.0	-37.3	
High Channel (1907.6MHz)									
3.815	-15.1	H	3.0	36.3	1.0	-50.4	-13.0	-37.4	
5.723	-16.5	H	3.0	35.6	1.0	-51.1	-13.0	-38.1	
3.815	-15.4	V	3.0	36.3	1.0	-50.7	-13.0	-37.7	
5.723	-14.2	V	3.0	35.6	1.0	-48.8	-13.0	-35.8	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Company:
Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: Band 4 REL 99, 1700MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)									
3.425	-14.6	H	3.0	36.4	1.0	-50.0	-13.0	-37.0	
5.137	-17.4	H	3.0	35.5	1.0	-51.9	-13.0	-38.9	
3.425	-16.1	V	3.0	36.4	1.0	-51.5	-13.0	-38.5	
5.137	-16.1	V	3.0	35.5	1.0	-50.7	-13.0	-37.7	
Mid Channel (1732.6MHz)									
3.465	-17.6	H	3.0	36.4	1.0	-53.0	-13.0	-40.0	
5.198	-16.8	H	3.0	35.5	1.0	-51.3	-13.0	-38.3	
3.465	-17.4	V	3.0	36.4	1.0	-52.8	-13.0	-39.8	
5.198	-14.6	V	3.0	35.5	1.0	-49.1	-13.0	-36.1	
High Channel (1752.6MHz)									
3.505	-18.1	H	3.0	36.4	1.0	-53.5	-13.0	-40.5	
5.258	-17.6	H	3.0	35.5	1.0	-52.1	-13.0	-39.1	
3.505	-17.5	V	3.0	36.4	1.0	-52.9	-13.0	-39.9	
5.258	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9	

Rev. 03.03.14

UMTS HSDPA, 1700MHz BAND 4**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Company:
Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: Band 4 HSDPA, 1700MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)									
3.425	-17.1	H	3.0	36.4	1.0	-52.5	-13.0	-39.5	
5.137	-16.1	H	3.0	35.5	1.0	-50.6	-13.0	-37.6	
3.425	-14.7	V	3.0	36.4	1.0	-50.1	-13.0	-37.1	
5.137	-15.6	V	3.0	35.5	1.0	-50.1	-13.0	-37.1	
Mid Channel (1732.6MHz)									
3.465	-18.4	H	3.0	36.4	1.0	-53.8	-13.0	-40.8	
5.198	-18.3	H	3.0	35.5	1.0	-52.7	-13.0	-39.7	
3.465	-17.3	V	3.0	36.4	1.0	-52.7	-13.0	-39.7	
5.198	-16.9	V	3.0	35.5	1.0	-51.3	-13.0	-38.3	
High Channel (1752.6MHz)									
3.505	-17.8	H	3.0	36.4	1.0	-53.1	-13.0	-40.1	
5.258	-16.7	H	3.0	35.5	1.0	-51.2	-13.0	-38.2	
3.505	-17.3	V	3.0	36.4	1.0	-52.7	-13.0	-39.7	
5.258	-16.8	V	3.0	35.5	1.0	-51.3	-13.0	-38.3	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: E.Yu
Configuration: EUT Only
Mode: CDMA2000, 1xRTT BC0

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)									
1.649	-15.9	H	3.0	34.9	1.0	-49.8	-13.0	-36.8	
2.474	-14.7	H	3.0	35.4	1.0	-49.1	-13.0	-36.1	
1.649	-15.8	V	3.0	34.9	1.0	-49.7	-13.0	-36.7	
2.474	-14.2	V	3.0	35.4	1.0	-48.6	-13.0	-35.6	
Mid Channel (836.52MHz)									
1.673	-14.7	H	3.0	34.9	1.0	-48.6	-13.0	-35.6	
2.510	-15.2	H	3.0	35.3	1.0	-49.5	-13.0	-36.5	
1.673	-14.5	V	3.0	34.9	1.0	-48.4	-13.0	-35.4	
2.510	-14.2	V	3.0	35.3	1.0	-48.5	-13.0	-35.5	
High Channel (848.31MHz)									
1.687	-15.4	H	3.0	34.9	1.0	-49.2	-13.0	-36.2	
2.544	-15.2	H	3.0	35.4	1.0	-49.6	-13.0	-36.6	
1.687	-14.5	V	3.0	34.9	1.0	-48.4	-13.0	-35.4	
2.544	-13.3	V	3.0	35.4	1.0	-47.7	-13.0	-34.7	

Rev. 03.03.14

EVDO-Rev A, 850MHz BC0

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/24/14
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA2000, EVDO_A BC0

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter 01	Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)									
1.649	-13.0	H	3.0	34.9	1.0	-46.9	-13.0	-33.9	
2.474	-12.6	H	3.0	35.4	1.0	-46.9	-13.0	-33.9	
1.649	-14.5	V	3.0	34.9	1.0	-48.4	-13.0	-35.4	
2.474	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0	
Mid Channel (836.52MHz)									
1.673	-12.2	H	3.0	34.9	1.0	-46.0	-13.0	-33.0	
2.510	-14.0	H	3.0	35.3	1.0	-48.3	-13.0	-35.3	
1.673	-14.3	V	3.0	34.9	1.0	-48.2	-13.0	-35.2	
2.510	-13.2	V	3.0	35.3	1.0	-47.5	-13.0	-34.5	
High Channel (848.31MHz)									
1.697	-13.4	H	3.0	34.9	1.0	-47.3	-13.0	-34.3	
2.545	-12.9	H	3.0	35.4	1.0	-47.3	-13.0	-34.3	
1.697	-15.6	V	3.0	34.9	1.0	-49.5	-13.0	-36.5	
2.545	-13.5	V	3.0	35.4	1.0	-47.8	-13.0	-34.8	

Rev. 03.03.14

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
 Date: 06/24/14
 Test Engineer: E.Yu
 Configuration: EUT Only
 Mode: CDMA2000, 1xRTT BC1

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber D	3m Chamber D		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)									
3.703	-12.7	H	3.0	38.0	1.0	-49.7	-13.0	-36.7	
5.554	-12.9	H	3.0	37.4	1.0	-49.3	-13.0	-36.3	
3.703	-14.7	V	3.0	38.0	1.0	-51.8	-13.0	-38.8	
5.554	-14.0	V	3.0	37.4	1.0	-50.3	-13.0	-37.3	
Mid Channel (1880MHz)									
3.760	-14.9	H	3.0	38.0	1.0	-51.9	-13.0	-38.9	
5.640	-13.8	H	3.0	37.3	1.0	-50.2	-13.0	-37.2	
3.760	-14.2	V	3.0	38.0	1.0	-51.2	-13.0	-38.2	
5.640	-13.6	V	3.0	37.3	1.0	-50.0	-13.0	-37.0	
High Channel (1908.75MHz)									
3.818	-12.8	H	3.0	37.9	1.0	-49.8	-13.0	-36.8	
5.726	-14.4	H	3.0	37.3	1.0	-50.7	-13.0	-37.7	
3.818	-11.2	V	3.0	37.9	1.0	-48.1	-13.0	-35.1	
5.726	-13.2	V	3.0	37.3	1.0	-49.5	-13.0	-36.5	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: CDMA EV DO_A BC 1

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)									
3.703	-12.1	H	3.0	36.3	1.0	-47.4	-13.0	-34.4	
5.554	-15.0	H	3.0	35.6	1.0	-49.6	-13.0	-36.6	
3.703	-15.1	V	3.0	36.3	1.0	-50.4	-13.0	-37.4	
5.554	-16.6	V	3.0	35.6	1.0	-51.2	-13.0	-38.2	
Mid Channel (1880.0)									
3.760	-13.4	H	3.0	36.3	1.0	-48.7	-13.0	-35.7	
5.640	-16.2	H	3.0	35.6	1.0	-50.8	-13.0	-37.8	
3.760	-14.0	V	3.0	36.3	1.0	-49.2	-13.0	-36.2	
5.640	-15.3	V	3.0	35.6	1.0	-49.9	-13.0	-36.9	
High Channel (1908.75MHz)									
3.818	-15.5	H	3.0	36.3	1.0	-50.8	-13.0	-37.8	
5.726	-17.2	H	3.0	35.6	1.0	-51.8	-13.0	-38.8	
3.818	-14.0	V	3.0	36.3	1.0	-49.2	-13.0	-36.2	
5.726	-16.3	V	3.0	35.6	1.0	-50.9	-13.0	-37.9	

Rev. 03.03.14

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
 Date: 6/24/2014
 Test Engineer: T Wang
 Configuration: EUT Only
 Mode: CDMA 2000 1XRTT BC15

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1711.25MHz)									
3.423	-15.2	H	3.0	36.4	1.0	-50.6	-13.0	-37.6	
5.134	-11.4	H	3.0	35.5	1.0	-46.0	-13.0	-33.0	
3.423	-15.6	V	3.0	36.4	1.0	-51.0	-13.0	-38.0	
5.134	-9.9	V	3.0	35.5	1.0	-44.4	-13.0	-31.4	
Mid Channel (1732.5MHz)									
3.465	-12.0	H	3.0	36.4	1.0	-47.3	-13.0	-34.3	
5.198	-8.0	H	3.0	35.5	1.0	-42.5	-13.0	-29.5	
3.465	-15.6	V	3.0	36.4	1.0	-51.0	-13.0	-38.0	
5.198	-10.8	V	3.0	35.5	1.0	-45.3	-13.0	-32.3	
High Channel (1753.75MHz)									
3.508	-17.0	H	3.0	36.4	1.0	-52.4	-13.0	-39.4	
5.261	-14.2	H	3.0	35.5	1.0	-48.7	-13.0	-35.7	
3.508	-15.7	V	3.0	36.4	1.0	-51.1	-13.0	-38.1	
5.261	-13.8	V	3.0	35.5	1.0	-48.3	-13.0	-35.3	

Rev. 03.03.14

EVDO-Rev A, 1700MHz BC15

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 6/24/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA EVDO_A BC15

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1711.25MHz)									
3.423	-4.8	H	3.0	36.4	1.0	-40.1	-13.0	-27.1	
5.134	-9.8	H	3.0	35.5	1.0	-44.3	-13.0	-31.3	
6.845	-2.5	H	3.0	35.9	1.0	-37.3	-13.0	-24.3	
3.423	-5.1	V	3.0	36.4	1.0	-40.4	-13.0	-27.4	
5.134	-9.0	V	3.0	35.5	1.0	-43.5	-13.0	-30.5	
6.845	1.7	V	3.0	35.9	1.0	-33.1	-13.0	-20.1	
Mid Channel (1732.5MHz)									
3.465	-2.4	H	3.0	36.4	1.0	-37.7	-13.0	-24.7	
5.198	-7.1	H	3.0	35.5	1.0	-41.5	-13.0	-28.5	
6.930	-3.9	H	3.0	35.9	1.0	-38.7	-13.0	-25.7	
3.465	-4.0	V	3.0	36.4	1.0	-39.4	-13.0	-26.4	
5.198	-5.6	V	3.0	35.5	1.0	-40.0	-13.0	-27.0	
6.930	-0.9	V	3.0	35.9	1.0	-35.8	-13.0	-22.8	
High Channel (1753.75MHz)									
3.508	-9.7	H	3.0	36.4	1.0	-45.1	-13.0	-32.1	
5.261	-8.2	H	3.0	35.5	1.0	-42.7	-13.0	-29.7	
7.015	-5.2	H	3.0	35.9	1.0	-40.1	-13.0	-27.1	
3.508	-9.3	V	3.0	36.4	1.0	-44.7	-13.0	-31.7	
5.261	-5.6	V	3.0	35.5	1.0	-40.1	-13.0	-27.1	
7.015	-1.2	V	3.0	35.9	1.0	-36.1	-13.0	-23.1	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: E.Yu
Configuration: EUT Only
Mode: CDMA2000, 1xRTT BC10

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 90

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)									
1.635	-14.5	H	3.0	34.9	1.0	-48.4	-13.0	-35.4	
2.452	-16.2	H	3.0	35.5	1.0	-50.7	-13.0	-37.7	
1.635	-15.4	V	3.0	34.9	1.0	-49.3	-13.0	-36.3	
2.452	-15.3	V	3.0	35.5	1.0	-49.8	-13.0	-36.8	
Mid Channel (820.5MHz)									
1.640	-14.2	H	3.0	34.9	1.0	-48.1	-13.0	-35.1	
2.460	-16.4	H	3.0	35.4	1.0	-50.9	-13.0	-37.9	
1.640	-16.1	V	3.0	34.9	1.0	-50.0	-13.0	-37.0	
2.460	-14.8	V	3.0	35.4	1.0	-49.3	-13.0	-36.3	
High Channel (822.75MHz)									
1.646	-13.8	H	3.0	34.9	1.0	-47.7	-13.0	-34.7	
2.468	-17.2	H	3.0	35.4	1.0	-51.6	-13.0	-38.6	
1.646	-13.2	V	3.0	34.9	1.0	-47.1	-13.0	-34.1	
2.468	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA2000, EV DO_A BC10

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter 01	Part 90

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)									
1.635	-12.6	H	3.0	34.9	1.0	-46.5	-13.0	-33.5	
2.452	-14.1	H	3.0	35.5	1.0	-48.6	-13.0	-35.6	
1.635	-13.6	V	3.0	34.9	1.0	-47.5	-13.0	-34.5	
2.452	-11.5	V	3.0	35.5	1.0	-46.0	-13.0	-33.0	
Mid Channel (820.0MHz)									
1.640	-12.8	H	3.0	34.9	1.0	-46.7	-13.0	-33.7	
2.460	-11.4	H	3.0	35.4	1.0	-45.8	-13.0	-32.8	
1.640	-15.6	V	3.0	34.9	1.0	-49.6	-13.0	-36.6	
2.460	-11.6	V	3.0	35.4	1.0	-46.0	-13.0	-33.0	
High Channel (822.75MHz)									
1.646	-12.8	H	3.0	34.9	1.0	-46.7	-13.0	-33.7	
2.468	-13.0	H	3.0	35.4	1.0	-47.4	-13.0	-34.4	
1.646	-15.3	V	3.0	34.9	1.0	-49.2	-13.0	-36.2	
2.468	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9	

Rev. 03.03.14

10.3.2.UAT

GPRS, 850MHz BAND 5

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/25/14
Test Engineer: E. Yu
Configuration: EUT only
Mode: GPRS 850MHz

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
3m Chamber F

Pre-amplifier
3m Chamber F

Filter

Limit
Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)									
1.648	-1.3	H	3.0	34.9	1.0	-35.2	-13.0	-22.2	
2.472	-11.5	H	3.0	35.4	1.0	-45.9	-13.0	-32.9	
1.648	-1.6	V	3.0	34.9	1.0	-35.5	-13.0	-22.5	
2.472	-13.9	V	3.0	35.4	1.0	-48.3	-13.0	-35.3	
Mid Channel (836.6MHz)									
1.673	2.6	H	3.0	34.9	1.0	-31.3	-13.0	-18.3	
2.510	-12.9	H	3.0	35.3	1.0	-47.2	-13.0	-34.2	
1.673	-2.7	V	3.0	34.9	1.0	-36.6	-13.0	-23.6	
2.510	-13.4	V	3.0	35.3	1.0	-47.7	-13.0	-34.7	
High Channel (848.8MHz)									
1.698	-0.9	H	3.0	34.9	1.0	-34.7	-13.0	-21.7	
2.546	-14.9	H	3.0	35.4	1.0	-49.3	-13.0	-36.3	
1.698	-0.8	V	3.0	34.9	1.0	-34.6	-13.0	-21.6	
2.546	-15.3	V	3.0	35.4	1.0	-49.7	-13.0	-36.7	

Rev. 03.03.14

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/21/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: EGPRS 850MHz

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
3m Chamber E

Pre-amplifier
3m Chamber E

Filter

Limit
Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)									
1.648	-4.3	H	3.0	37.6	1.0	-40.9	-13.0	-27.9	
2.472	-15.7	H	3.0	38.0	1.0	-52.6	-13.0	-39.6	
1.648	-5.5	V	3.0	37.6	1.0	-42.1	-13.0	-29.1	
2.472	-13.2	V	3.0	38.0	1.0	-50.2	-13.0	-37.2	
Mid Channel (836.6MHz)									
1.673	-1.1	H	3.0	37.6	1.0	-37.7	-13.0	-24.7	
2.510	-14.3	H	3.0	37.9	1.0	-51.2	-13.0	-38.2	
1.673	-2.3	V	3.0	37.6	1.0	-38.9	-13.0	-25.9	
2.510	-12.5	V	3.0	37.9	1.0	-49.5	-13.0	-36.5	
High Channel (848.8MHz)									
1.698	-4.9	H	3.0	37.6	1.0	-41.5	-13.0	-28.5	
2.546	-11.5	H	3.0	38.0	1.0	-48.5	-13.0	-35.5	
1.698	-12.1	V	3.0	37.6	1.0	-48.7	-13.0	-35.7	
2.546	-9.9	V	3.0	38.0	1.0	-46.9	-13.0	-33.9	

Rev. 03.03.14

GPRS, 1900MHz BAND 2

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/12/14
Test Engineer: E. Yu
Configuration: EUT only
Mode: GPRS 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)									
3.700	-11.3	H	3.0	36.3	1.0	-46.6	-13.0	-33.6	
5.551	-11.4	H	3.0	35.6	1.0	-46.0	-13.0	-33.0	
3.700	-12.1	V	3.0	36.3	1.0	-47.4	-13.0	-34.4	
5.551	-11.2	V	3.0	35.6	1.0	-45.7	-13.0	-32.7	
Mid Channel (1880.0)									
3.760	-10.5	H	3.0	36.3	1.0	-45.8	-13.0	-32.8	
5.640	-11.3	H	3.0	35.6	1.0	-45.9	-13.0	-32.9	
3.760	-11.3	V	3.0	36.3	1.0	-46.6	-13.0	-33.6	
5.640	-10.6	V	3.0	35.6	1.0	-45.2	-13.0	-32.2	
High Channel (1909.8MHz)									
3.820	-10.8	H	3.0	36.3	1.0	-46.1	-13.0	-33.1	
5.729	-11.4	H	3.0	35.6	1.0	-46.0	-13.0	-33.0	
3.820	-11.0	V	3.0	36.3	1.0	-46.3	-13.0	-33.3	
5.729	-10.9	V	3.0	35.6	1.0	-45.5	-13.0	-32.5	

Rev. 03.03.14

EGPRS, 1900MHz BAND 2

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/25/14
Test Engineer: E. Yu
Configuration: EUT only
Mode: EGPRS 1900MHz

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
3m Chamber F

Pre-amplifier
3m Chamber F

Filter

Limit
Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)									
3.700	-11.4	H	3.0	36.3	1.0	-46.7	-13.0	-33.7	
5.551	-10.4	H	3.0	35.6	1.0	-44.9	-13.0	-31.9	
3.700	-11.5	V	3.0	36.3	1.0	-46.9	-13.0	-33.9	
5.551	-11.5	V	3.0	35.6	1.0	-46.0	-13.0	-33.0	
Mid Channel (1880.0)									
3.760	-11.0	H	3.0	36.3	1.0	-46.3	-13.0	-33.3	
5.640	-11.0	H	3.0	35.6	1.0	-45.5	-13.0	-32.5	
3.760	-11.5	V	3.0	36.3	1.0	-46.8	-13.0	-33.8	
5.640	-11.1	V	3.0	35.6	1.0	-45.6	-13.0	-32.6	
High Channel (1909.8MHz)									
3.820	-12.1	H	3.0	36.3	1.0	-47.4	-13.0	-34.4	
5.729	-10.2	H	3.0	35.6	1.0	-44.8	-13.0	-31.8	
3.820	-11.2	V	3.0	36.3	1.0	-46.5	-13.0	-33.5	
5.729	-11.0	V	3.0	35.6	1.0	-45.6	-13.0	-32.6	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: Band 5 REL 99, 850MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)									
1.653	-24.0	H	3.0	34.9	1.0	-57.9	-13.0	-44.9	
2.479	-19.2	H	3.0	35.4	1.0	-53.6	-13.0	-40.6	
3.306	-19.2	H	3.0	36.4	1.0	-54.6	-13.0	-41.6	
1.653	-22.0	V	3.0	34.9	1.0	-55.9	-13.0	-42.9	
2.479	-18.3	V	3.0	35.4	1.0	-52.7	-13.0	-39.7	
3.306	-17.4	V	3.0	36.4	1.0	-52.8	-13.0	-39.8	
Mid Channel (836MHz)									
1.672	-22.4	H	3.0	34.9	1.0	-56.3	-13.0	-43.3	
2.508	-19.8	H	3.0	35.3	1.0	-54.1	-13.0	-41.1	
3.344	-18.6	H	3.0	36.4	1.0	-54.0	-13.0	-41.0	
1.672	-20.4	V	3.0	34.9	1.0	-54.3	-13.0	-41.3	
2.508	-18.7	V	3.0	35.3	1.0	-53.0	-13.0	-40.0	
3.344	-17.5	V	3.0	36.4	1.0	-52.9	-13.0	-39.9	
High Channel (846.6MHz)									
1.693	-23.5	H	3.0	34.9	1.0	-57.4	-13.0	-44.4	
2.540	-20.1	H	3.0	35.4	1.0	-54.4	-13.0	-41.4	
3.386	-17.4	H	3.0	36.4	1.0	-52.8	-13.0	-39.8	
1.693	-21.3	V	3.0	34.9	1.0	-55.1	-13.0	-42.1	
2.540	-17.9	V	3.0	35.4	1.0	-52.3	-13.0	-39.3	
3.386	-16.5	V	3.0	36.4	1.0	-51.9	-13.0	-38.9	

Rev. 03.03.14

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: Band 5 HSDPA, 850MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)									
1.653	-24.0	H	3.0	34.9	1.0	-57.9	-13.0	-44.9	
2.479	-19.1	H	3.0	35.4	1.0	-53.5	-13.0	-40.5	
3.306	-18.1	H	3.0	36.4	1.0	-53.6	-13.0	-40.6	
1.653	-21.1	V	3.0	34.9	1.0	-55.0	-13.0	-42.0	
2.479	-15.4	V	3.0	35.4	1.0	-49.7	-13.0	-36.7	
3.306	-18.3	V	3.0	36.4	1.0	-53.8	-13.0	-40.8	
Mid Channel (836MHz)									
1.672	-22.6	H	3.0	34.9	1.0	-56.5	-13.0	-43.5	
2.508	-19.4	H	3.0	35.3	1.0	-53.7	-13.0	-40.7	
3.344	-17.9	H	3.0	36.4	1.0	-53.3	-13.0	-40.3	
1.672	-20.9	V	3.0	34.9	1.0	-54.7	-13.0	-41.7	
2.508	-19.5	V	3.0	35.3	1.0	-53.8	-13.0	-40.8	
3.344	-17.2	V	3.0	36.4	1.0	-52.6	-13.0	-39.6	
High Channel (846.6MHz)									
1.693	-23.8	H	3.0	34.9	1.0	-57.7	-13.0	-44.7	
2.540	-20.1	H	3.0	35.4	1.0	-54.5	-13.0	-41.5	
3.386	-16.5	H	3.0	36.4	1.0	-51.9	-13.0	-38.9	
1.693	-21.5	V	3.0	34.9	1.0	-55.3	-13.0	-42.3	
2.540	-18.7	V	3.0	35.4	1.0	-53.1	-13.0	-40.1	
3.386	-17.2	V	3.0	36.4	1.0	-52.6	-13.0	-39.6	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: Band 2 REL 99, 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)									
3.705	-16.5	H	3.0	36.3	1.0	-51.8	-13.0	-38.8	
5.557	-15.1	H	3.0	35.6	1.0	-49.6	-13.0	-36.6	
3.705	-15.5	V	3.0	36.3	1.0	-50.8	-13.0	-37.8	
5.557	-15.4	V	3.0	35.6	1.0	-50.0	-13.0	-37.0	
Mid Channel (1880MHz)									
3.760	-15.7	H	3.0	36.3	1.0	-51.0	-13.0	-38.0	
5.640	-16.6	H	3.0	35.6	1.0	-51.1	-13.0	-38.1	
3.760	-14.0	V	3.0	36.3	1.0	-49.3	-13.0	-36.3	
5.640	-16.3	V	3.0	35.6	1.0	-50.9	-13.0	-37.9	
High Channel (1907.6MHz)									
3.815	-15.3	H	3.0	36.3	1.0	-50.5	-13.0	-37.5	
5.723	-17.5	H	3.0	35.6	1.0	-52.1	-13.0	-39.1	
3.815	-15.1	V	3.0	36.3	1.0	-50.4	-13.0	-37.4	
5.723	-16.2	V	3.0	35.6	1.0	-50.8	-13.0	-37.8	

Rev. 03.03.14

UMTS HSDPA, 1900MHz BAND 2**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: Band 2 HSDPA, 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)									
3.705	-16.7	H	3.0	36.3	1.0	-52.0	-13.0	-39.0	
5.557	-15.7	H	3.0	35.6	1.0	-50.2	-13.0	-37.2	
3.705	-15.8	V	3.0	36.3	1.0	-51.1	-13.0	-38.1	
5.557	-16.6	V	3.0	35.6	1.0	-51.2	-13.0	-38.2	
Mid Channel (1880MHz)									
3.760	-16.7	H	3.0	36.3	1.0	-52.0	-13.0	-39.0	
5.640	-16.3	H	3.0	35.6	1.0	-50.9	-13.0	-37.9	
3.760	-14.8	V	3.0	36.3	1.0	-50.1	-13.0	-37.1	
5.640	-17.0	V	3.0	35.6	1.0	-51.6	-13.0	-38.6	
High Channel (1907.6MHz)									
3.815	-16.1	H	3.0	36.3	1.0	-51.4	-13.0	-38.4	
5.723	-16.5	H	3.0	35.6	1.0	-51.1	-13.0	-38.1	
3.815	-16.4	V	3.0	36.3	1.0	-51.6	-13.0	-38.6	
5.723	-16.3	V	3.0	35.6	1.0	-50.9	-13.0	-37.9	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: Band 4 REL 99, 1700MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)									
3.425	-18.0	H	3.0	36.4	1.0	-53.4	-13.0	-40.4	
5.137	-16.7	H	3.0	35.5	1.0	-51.2	-13.0	-38.2	
3.425	-16.9	V	3.0	36.4	1.0	-52.3	-13.0	-39.3	
5.137	-15.6	V	3.0	35.5	1.0	-50.1	-13.0	-37.1	
Mid Channel (1732.6MHz)									
3.465	-19.1	H	3.0	36.4	1.0	-54.4	-13.0	-41.4	
5.198	-17.1	H	3.0	35.5	1.0	-51.6	-13.0	-38.6	
3.465	-17.2	V	3.0	36.4	1.0	-52.5	-13.0	-39.5	
5.198	-17.2	V	3.0	35.5	1.0	-51.7	-13.0	-38.7	
High Channel (1752.6MHz)									
3.505	-17.8	H	3.0	36.4	1.0	-53.2	-13.0	-40.2	
5.258	-17.5	H	3.0	35.5	1.0	-52.0	-13.0	-39.0	
3.505	-18.7	V	3.0	36.4	1.0	-54.0	-13.0	-41.0	
5.258	-17.2	V	3.0	35.5	1.0	-51.7	-13.0	-38.7	

Rev. 03.03.14

UMTS HSDPA, 1700MHz BAND 4**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 6/23/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: Band 4 HSDPA, 1700MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)									
3.425	-18.2	H	3.0	36.4	1.0	-53.6	-13.0	-40.6	
5.137	-17.0	H	3.0	35.5	1.0	-51.5	-13.0	-38.5	
3.425	-17.6	V	3.0	36.4	1.0	-53.0	-13.0	-40.0	
5.137	-16.6	V	3.0	35.5	1.0	-51.1	-13.0	-38.1	
Mid Channel (1732.6MHz)									
3.465	-18.8	H	3.0	36.4	1.0	-54.2	-13.0	-41.2	
5.198	-17.6	H	3.0	35.5	1.0	-52.0	-13.0	-39.0	
3.465	-18.3	V	3.0	36.4	1.0	-53.6	-13.0	-40.6	
5.198	-15.8	V	3.0	35.5	1.0	-50.3	-13.0	-37.3	
High Channel (1752.6MHz)									
3.505	-16.8	H	3.0	36.4	1.0	-52.2	-13.0	-39.2	
5.258	-17.2	H	3.0	35.5	1.0	-51.7	-13.0	-38.7	
3.505	-18.2	V	3.0	36.4	1.0	-53.5	-13.0	-40.5	
5.258	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: T Wang
Configuration: EUT Only
Mode: CDMA2000, 1xRTT BC0

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)									
1.649	-19.8	H	3.0	34.9	1.0	-53.7	-13.0	-40.7	
2.474	-18.3	H	3.0	35.4	1.0	-52.6	-13.0	-39.6	
1.649	-23.2	V	3.0	34.9	1.0	-57.1	-13.0	-44.1	
2.474	-18.0	V	3.0	35.4	1.0	-52.4	-13.0	-39.4	
Mid Channel (836.52MHz)									
1.673	-7.8	H	3.0	34.9	1.0	-41.7	-13.0	-28.7	
2.510	-13.5	H	3.0	35.3	1.0	-47.8	-13.0	-34.8	
1.673	-9.9	V	3.0	34.9	1.0	-43.8	-13.0	-30.8	
2.510	-16.3	V	3.0	35.3	1.0	-50.6	-13.0	-37.6	
High Channel (848.31MHz)									
1.696	-12.7	H	3.0	34.9	1.0	-46.6	-13.0	-33.6	
2.544	-16.3	H	3.0	35.4	1.0	-50.7	-13.0	-37.7	
1.687	-10.9	V	3.0	34.9	1.0	-44.8	-13.0	-31.8	
2.544	-15.7	V	3.0	35.4	1.0	-50.1	-13.0	-37.1	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Company:
Project #: 14U17676
Date: 06/24/14
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA2000, EVDO_A BC0

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter 01	Part 22

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)									
1.649	-24.6	H	3.0	34.9	1.0	-58.5	-13.0	-45.5	
2.474	-17.2	H	3.0	35.4	1.0	-51.6	-13.0	-38.6	
1.649	-22.9	V	3.0	34.9	1.0	-56.8	-13.0	-43.8	
2.474	-19.3	V	3.0	35.4	1.0	-53.7	-13.0	-40.7	
Mid Channel (836.52MHz)									
1.673	-23.9	H	3.0	34.9	1.0	-57.8	-13.0	-44.8	
2.510	-20.4	H	3.0	35.3	1.0	-54.7	-13.0	-41.7	
1.673	-22.4	V	3.0	34.9	1.0	-56.3	-13.0	-43.3	
2.510	-18.7	V	3.0	35.3	1.0	-53.0	-13.0	-40.0	
High Channel (848.31MHz)									
1.697	-23.1	H	3.0	34.9	1.0	-56.9	-13.0	-43.9	
2.545	-21.0	H	3.0	35.4	1.0	-55.4	-13.0	-42.4	
1.697	-22.3	V	3.0	34.9	1.0	-56.1	-13.0	-43.1	
2.545	-19.1	V	3.0	35.4	1.0	-53.4	-13.0	-40.4	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: T Wang
Configuration: EUT Only
Mode: CDMA2000, 1xRTT BC1

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)									
3.703	-13.4	H	3.0	36.3	1.0	-48.7	-13.0	-35.7	
5.554	-12.7	H	3.0	35.6	1.0	-47.2	-13.0	-34.2	
3.703	-12.7	V	3.0	36.3	1.0	-48.0	-13.0	-35.0	
5.554	-12.3	V	3.0	35.6	1.0	-46.9	-13.0	-33.9	
Mid Channel (1880MHz)									
3.760	-13.5	H	3.0	36.3	1.0	-48.8	-13.0	-35.8	
5.640	-12.2	H	3.0	35.6	1.0	-46.8	-13.0	-33.8	
3.760	-12.2	V	3.0	36.3	1.0	-47.5	-13.0	-34.5	
5.640	-11.5	V	3.0	35.6	1.0	-46.1	-13.0	-33.1	
High Channel (1908.75MHz)									
3.818	-12.7	H	3.0	36.3	1.0	-48.0	-13.0	-35.0	
5.726	-13.3	H	3.0	35.6	1.0	-47.8	-13.0	-34.8	
3.818	-12.6	V	3.0	36.3	1.0	-47.9	-13.0	-34.9	
5.726	-13.3	V	3.0	35.6	1.0	-47.9	-13.0	-34.9	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: Ali Poushnejad
Configuration: EUT only
Mode: CDMA EV DO_A BC 1

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 24

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)									
3.703	-13.3	H	3.0	36.3	1.0	-48.6	-13.0	-35.6	
5.554	-15.2	H	3.0	35.6	1.0	-49.7	-13.0	-36.7	
3.703	-14.3	V	3.0	36.3	1.0	-49.6	-13.0	-36.6	
5.554	-14.9	V	3.0	35.6	1.0	-49.5	-13.0	-36.5	
Mid Channel (1880.0)									
3.760	-14.9	H	3.0	36.3	1.0	-50.2	-13.0	-37.2	
5.640	-15.8	H	3.0	35.6	1.0	-50.4	-13.0	-37.4	
3.760	-13.6	V	3.0	36.3	1.0	-48.9	-13.0	-35.9	
5.640	-15.1	V	3.0	35.6	1.0	-49.7	-13.0	-36.7	
High Channel (1908.75MHz)									
3.818	-15.2	H	3.0	36.3	1.0	-50.5	-13.0	-37.5	
5.726	-14.9	H	3.0	35.6	1.0	-49.5	-13.0	-36.5	
3.818	-15.1	V	3.0	36.3	1.0	-50.3	-13.0	-37.3	
5.726	-15.4	V	3.0	35.6	1.0	-49.9	-13.0	-36.9	

Rev. 03.03.14

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
 Date: 6/24/2014
 Test Engineer: T Wang
 Configuration: EUT Only
 Mode: CDMA 2000 1XRTT BC15

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1711.25MHz)									
3.423	-14.5	H	3.0	36.4	1.0	-49.9	-13.0	-36.9	
5.134	-13.5	H	3.0	35.5	1.0	-48.1	-13.0	-35.1	
3.423	-14.6	V	3.0	36.4	1.0	-50.0	-13.0	-37.0	
5.134	-12.7	V	3.0	35.5	1.0	-47.2	-13.0	-34.2	
Mid Channel (1732.5MHz)									
3.465	-15.8	H	3.0	36.4	1.0	-51.1	-13.0	-38.1	
5.198	-14.2	H	3.0	35.5	1.0	-48.7	-13.0	-35.7	
3.465	-15.1	V	3.0	36.4	1.0	-50.5	-13.0	-37.5	
5.198	-13.6	V	3.0	35.5	1.0	-48.1	-13.0	-35.1	
High Channel (1753.75MHz)									
3.508	-15.9	H	3.0	36.4	1.0	-51.3	-13.0	-38.3	
5.261	-14.0	H	3.0	35.5	1.0	-48.5	-13.0	-35.5	
3.508	-15.8	V	3.0	36.4	1.0	-51.2	-13.0	-38.2	
5.261	-13.8	V	3.0	35.5	1.0	-48.3	-13.0	-35.3	

Rev. 03.03.14

EVDO-Rev A, 1700MHz BC15

Project #: 14U17676
Date: 6/24/2014
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA EVDO_A BC15

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 27

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1711.25MHz)									
3.423	-12.6	H	3.0	36.4	1.0	-48.0	-13.0	-35.0	
5.134	-15.3	H	3.0	35.5	1.0	-49.8	-13.0	-36.8	
6.845	-13.2	H	3.0	35.9	1.0	-48.0	-13.0	-35.0	
3.423	-15.1	V	3.0	36.4	1.0	-50.5	-13.0	-37.5	
5.134	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4	
6.845	-14.6	V	3.0	35.9	1.0	-49.5	-13.0	-36.5	
Mid Channel (1732.5MHz)									
3.465	-17.1	H	3.0	36.4	1.0	-52.5	-13.0	-39.5	
5.198	-15.8	H	3.0	35.5	1.0	-50.3	-13.0	-37.3	
6.930	-13.5	H	3.0	35.9	1.0	-48.4	-13.0	-35.4	
3.465	-16.1	V	3.0	36.4	1.0	-51.5	-13.0	-38.5	
5.198	-15.5	V	3.0	35.5	1.0	-50.0	-13.0	-37.0	
6.930	-14.5	V	3.0	35.9	1.0	-49.4	-13.0	-36.4	
High Channel (1753.75MHz)									
3.508	-18.0	H	3.0	36.4	1.0	-53.3	-13.0	-40.3	
5.261	-16.2	H	3.0	35.5	1.0	-50.7	-13.0	-37.7	
7.015	-12.6	H	3.0	35.9	1.0	-47.5	-13.0	-34.5	
3.508	-17.1	V	3.0	36.4	1.0	-52.5	-13.0	-39.5	
5.261	-15.4	V	3.0	35.5	1.0	-49.9	-13.0	-36.9	
7.015	-14.5	V	3.0	35.9	1.0	-49.4	-13.0	-36.4	

Rev. 03.03.14

3m Radiated Emissions Chamber Above 1GHz Substitution Measurement

Project #: 14U17676
Date: 06/24/14
Test Engineer: T Wang
Configuration: EUT Only
Mode: CDMA2000, 1xRTT BC10

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 90

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)									
1.635	-18.7	H	3.0	34.9	1.0	-52.6	-13.0	-39.6	
2.452	-18.4	H	3.0	35.5	1.0	-52.9	-13.0	-39.9	
1.636	-16.1	V	3.0	34.9	1.0	-50.0	-13.0	-37.0	
2.452	-17.9	V	3.0	35.5	1.0	-52.3	-13.0	-39.3	
Mid Channel (820.0MHz)									
1.640	-15.1	H	3.0	34.9	1.0	-49.0	-13.0	-36.0	
2.460	-17.2	H	3.0	35.4	1.0	-51.6	-13.0	-38.6	
1.640	-16.5	V	3.0	34.9	1.0	-50.4	-13.0	-37.4	
2.460	-15.6	V	3.0	35.4	1.0	-50.1	-13.0	-37.1	
High Channel (822.75MHz)									
1.646	-16.4	H	3.0	34.9	1.0	-50.3	-13.0	-37.3	
2.468	-18.1	H	3.0	35.4	1.0	-52.5	-13.0	-39.5	
1.646	-14.1	V	3.0	34.9	1.0	-48.0	-13.0	-35.0	
2.468	-17.1	V	3.0	35.4	1.0	-51.5	-13.0	-38.5	

Rev. 03.03.14

EVDO-Rev A, 800MHz BC10

**3m Radiated Emissions Chamber
Above 1GHz Substitution Measurement**

Project #: 14U17676
Date: 06/24/14
Test Engineer: Ali Poushnejad
Configuration: EUT Only
Mode: CDMA2000, EV DO_A BC10

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F		Part 90

Frequency (GHz)	SG reading (dBm)	Ant. Pol. (H/V)	Distance	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)									
1.635	-22.5	H	3.0	34.9	1.0	-56.4	-13.0	-43.4	
2.452	-16.5	H	3.0	35.5	1.0	-50.9	-13.0	-37.9	
1.635	-20.4	V	3.0	34.9	1.0	-54.4	-13.0	-41.4	
2.452	-16.2	V	3.0	35.5	1.0	-50.7	-13.0	-37.7	
Mid Channel (820.0MHz)									
1.640	-23.1	H	3.0	34.9	1.0	-57.0	-13.0	-44.0	
2.460	-19.0	H	3.0	35.4	1.0	-53.4	-13.0	-40.4	
1.640	-22.8	V	3.0	34.9	1.0	-56.7	-13.0	-43.7	
2.460	-17.7	V	3.0	35.4	1.0	-52.1	-13.0	-39.1	
High Channel (822.75MHz)									
1.646	-22.5	H	3.0	34.9	1.0	-56.4	-13.0	-43.4	
2.468	-18.4	H	3.0	35.4	1.0	-52.8	-13.0	-39.8	
1.646	-23.0	V	3.0	34.9	1.0	-56.9	-13.0	-43.9	
2.468	-13.8	V	3.0	35.4	1.0	-48.2	-13.0	-35.2	

Rev. 03.03.14