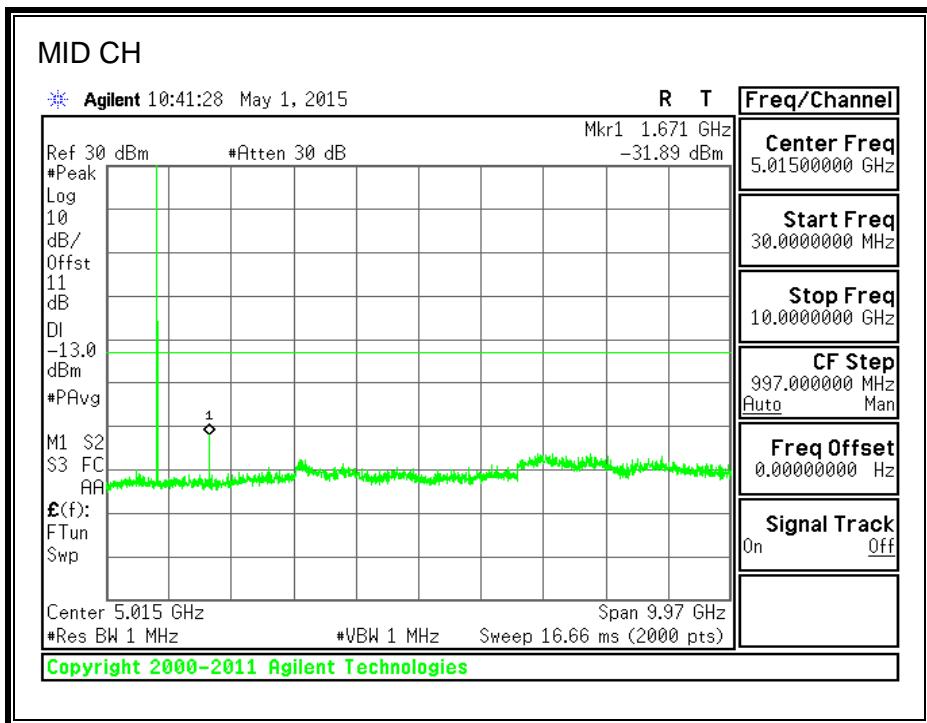
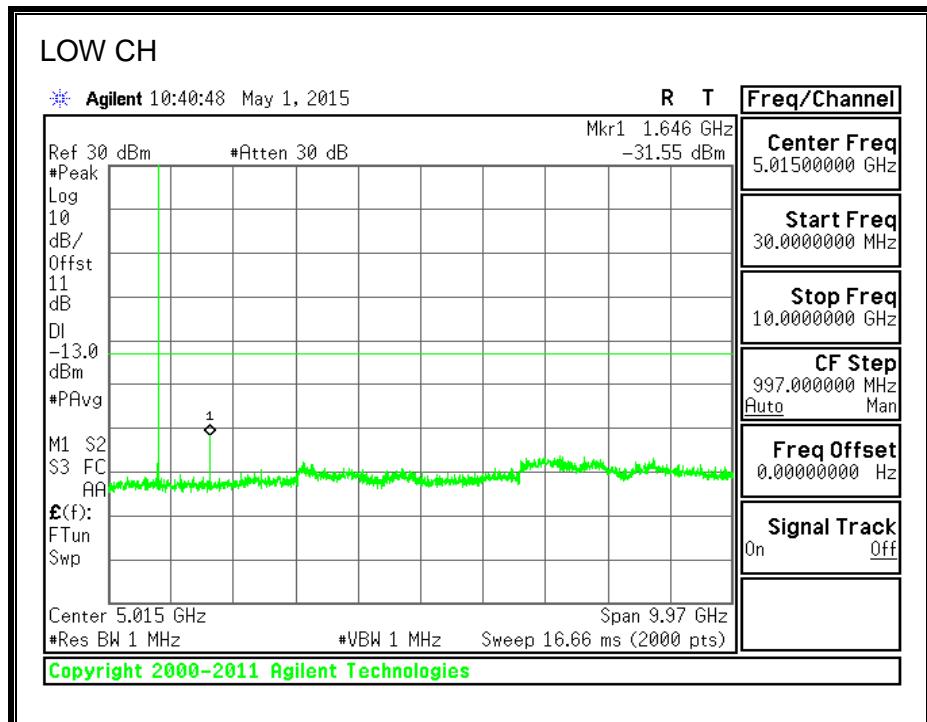
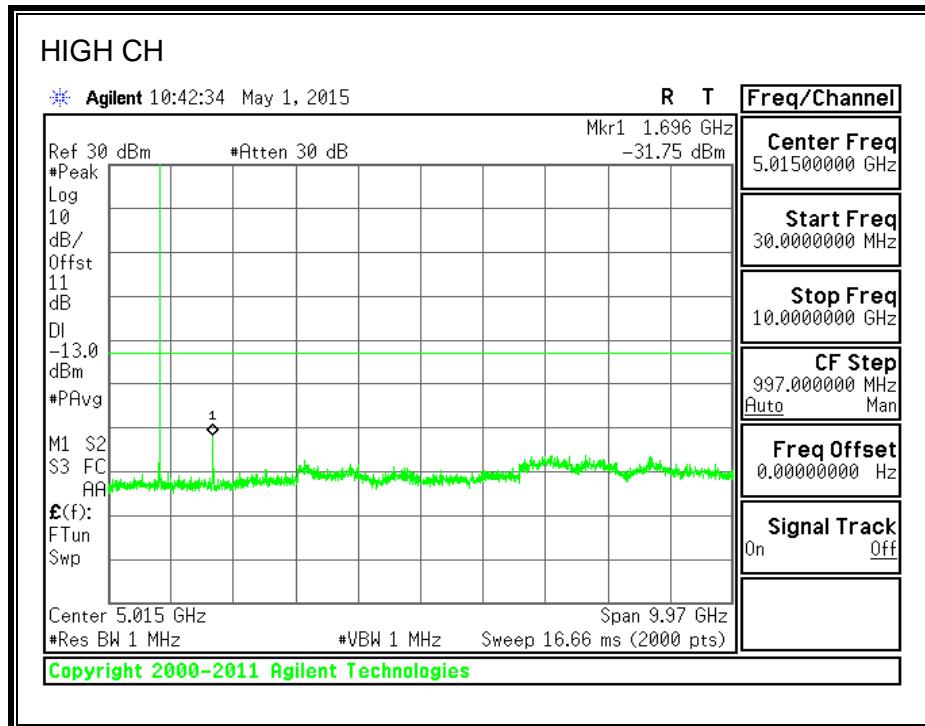
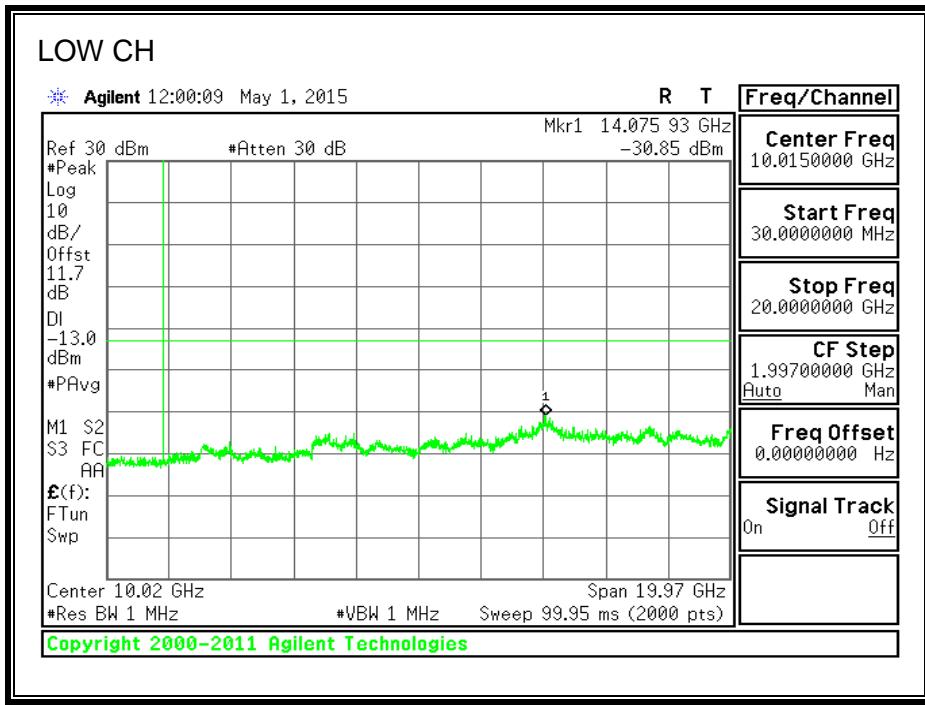
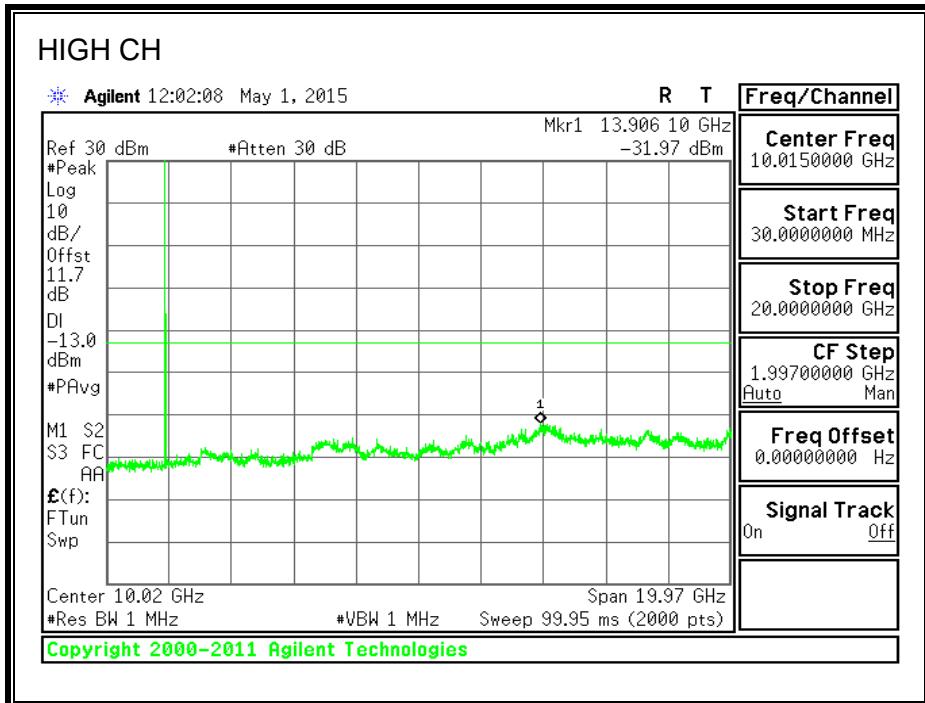
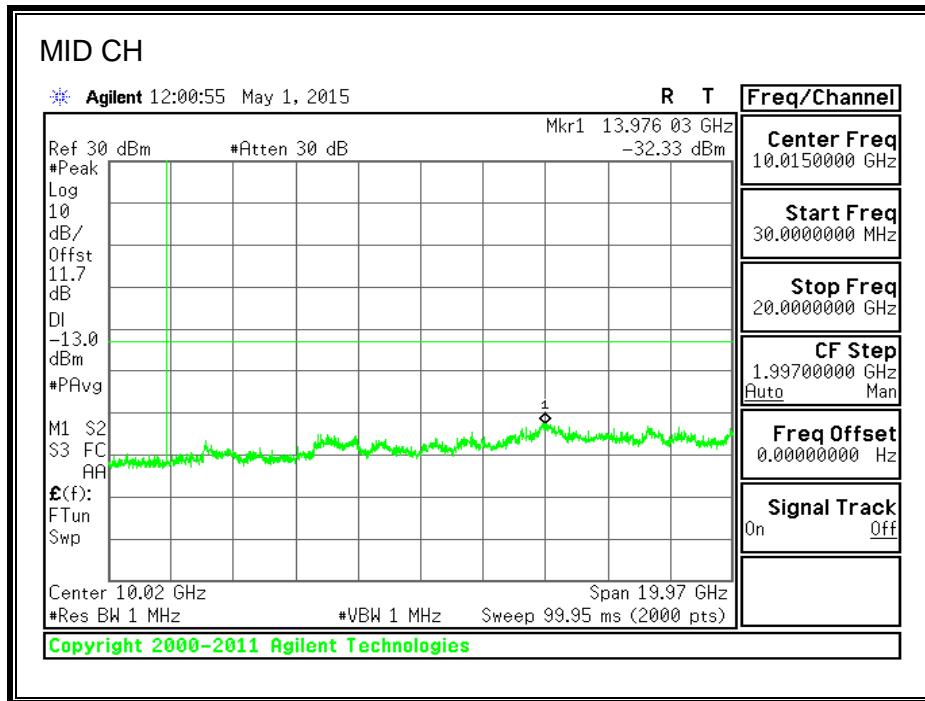


8.5.1. GSM-GPRS

850MHz BAND

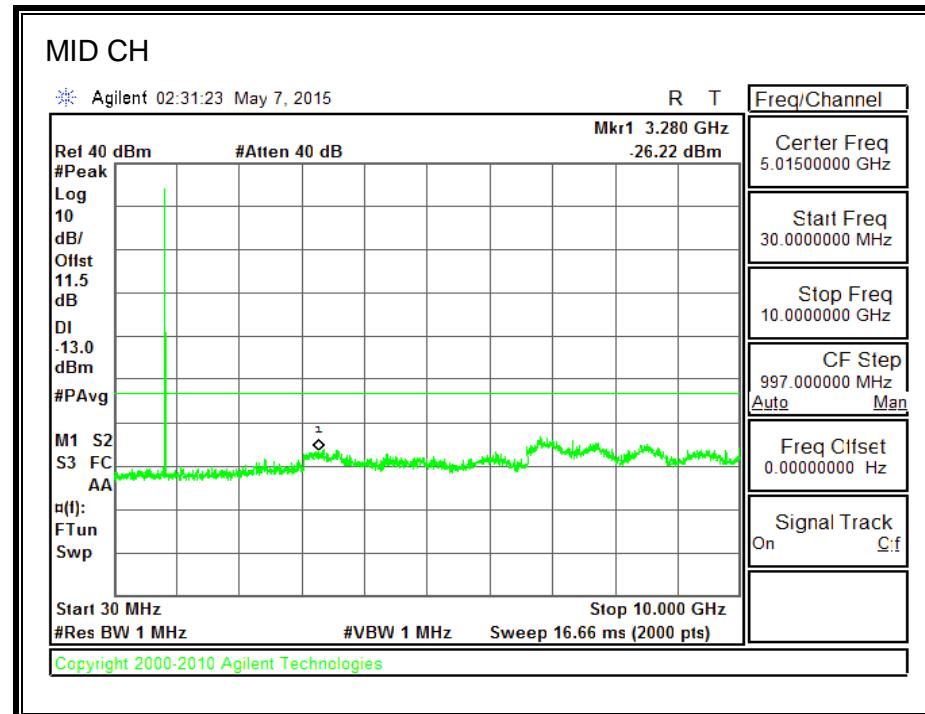
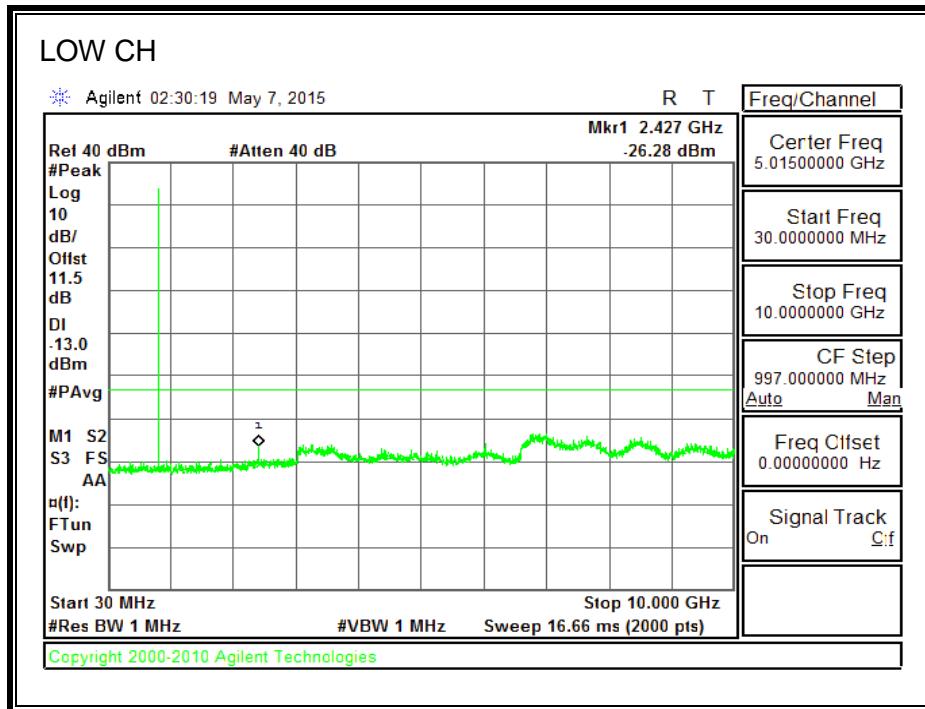


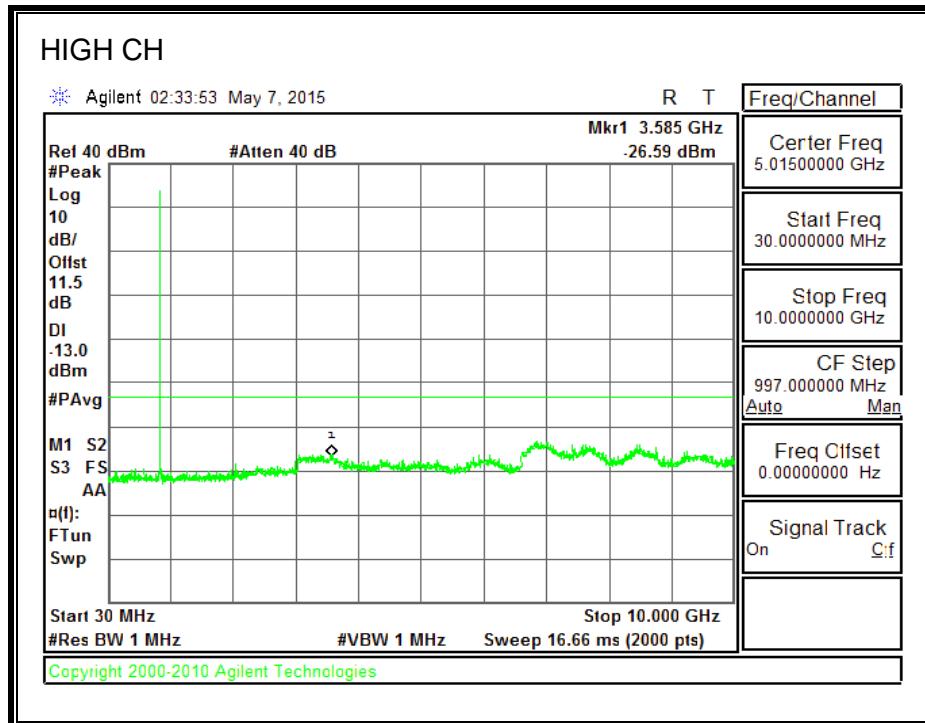
**1900MHz BAND**

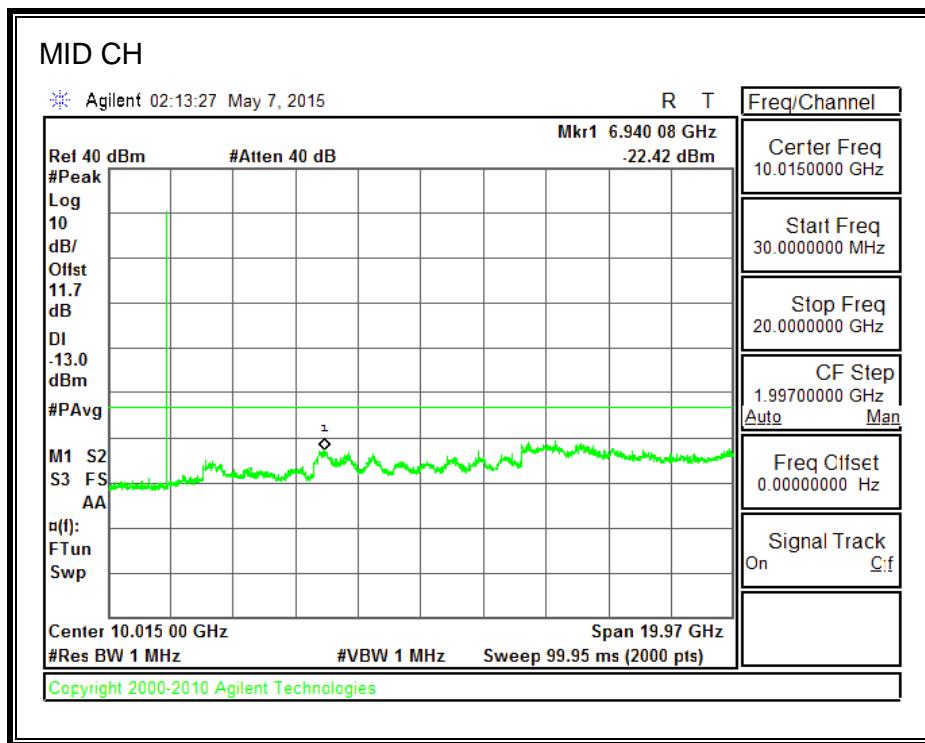
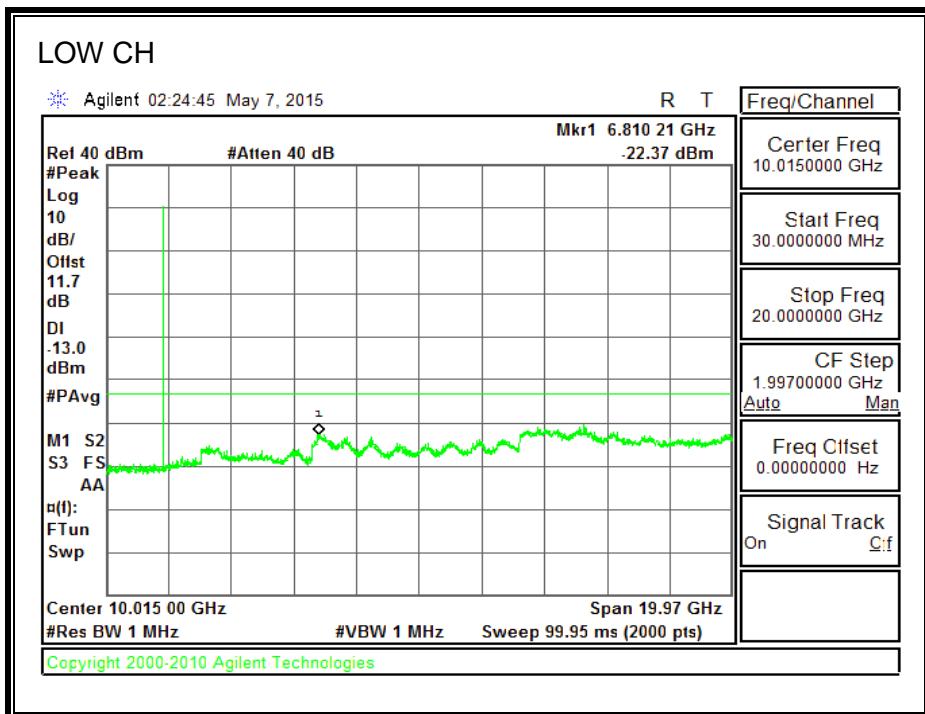


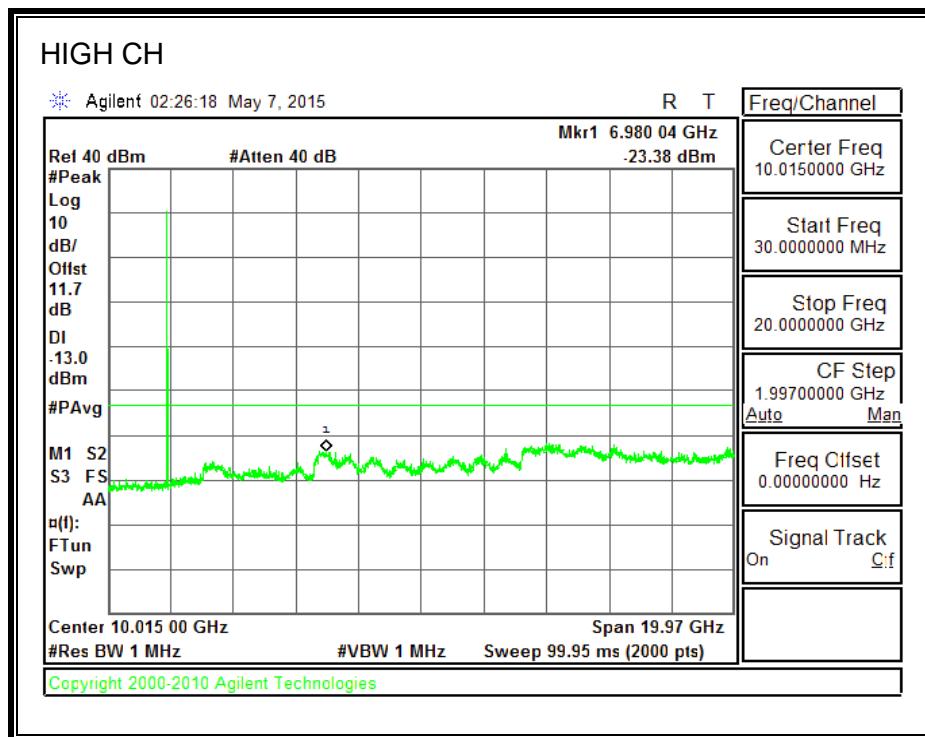
8.5.2. GSM-EGPRS

850MHz BAND



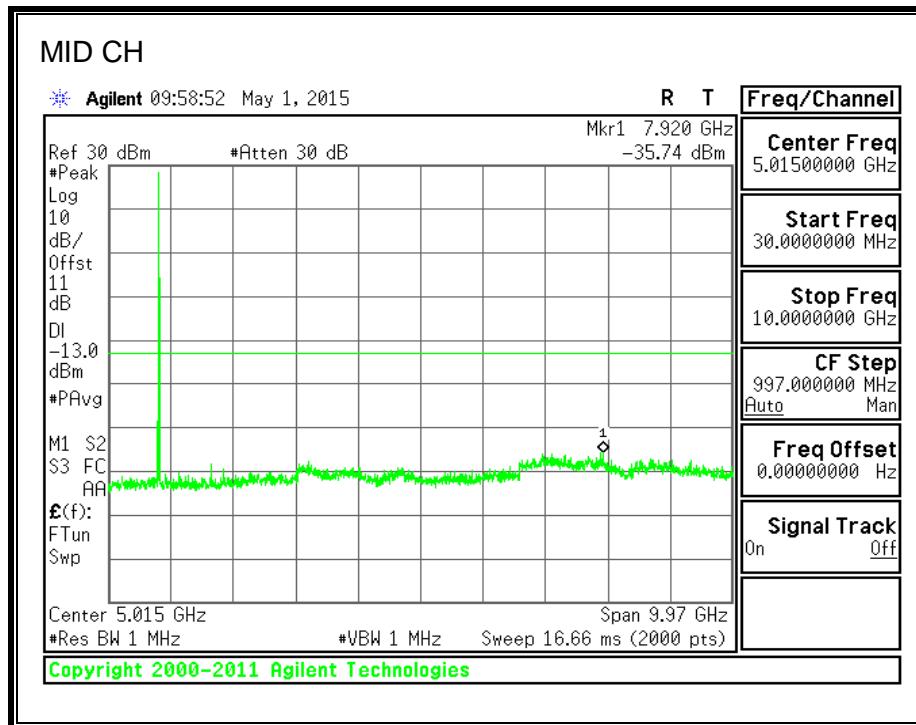
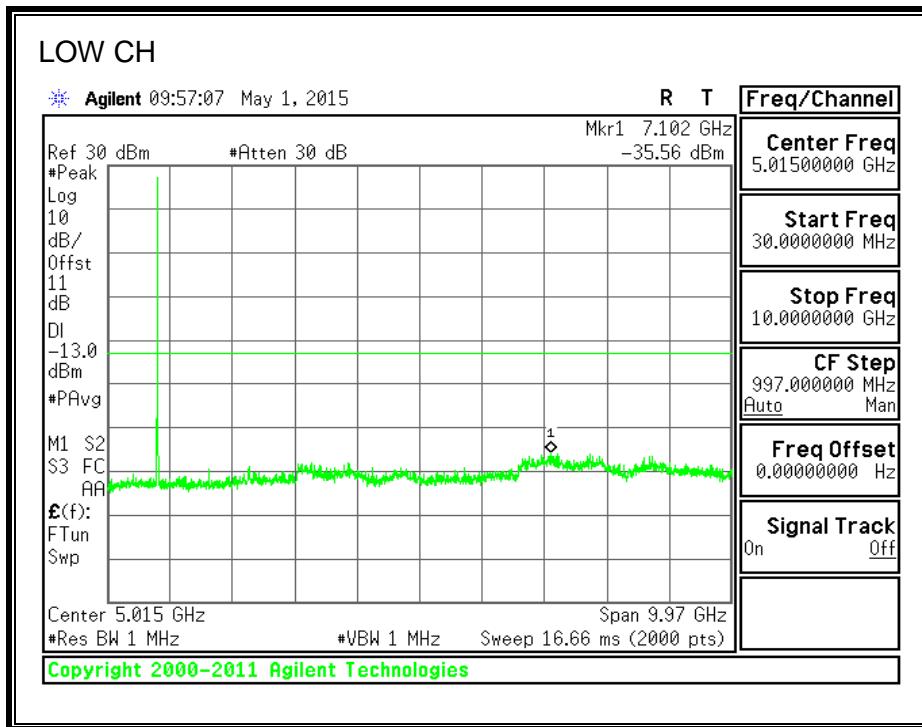


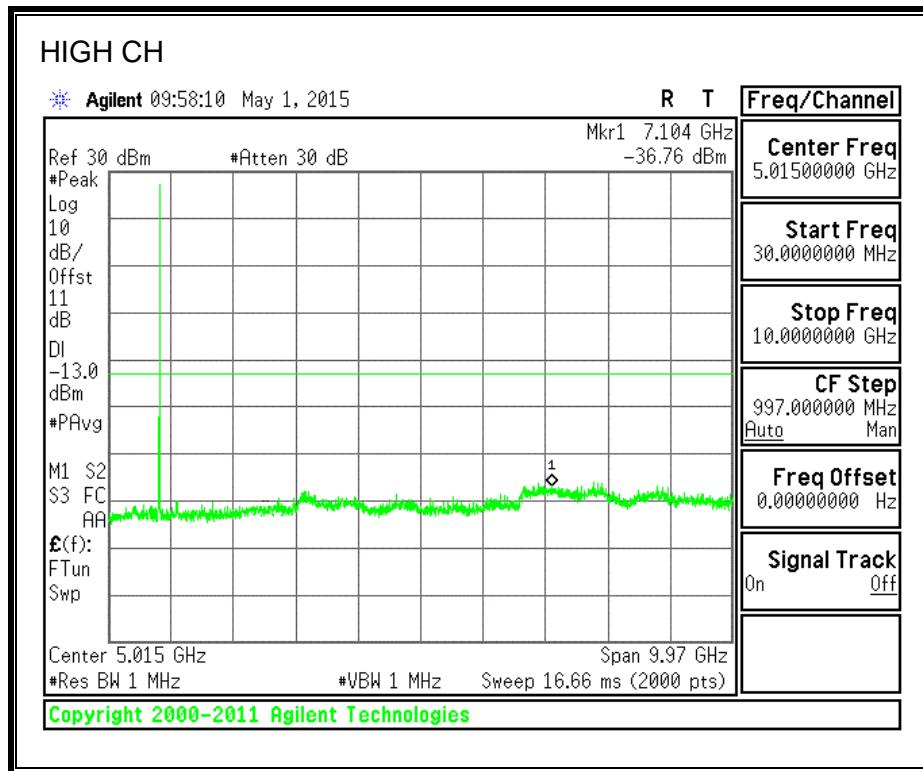
1900MHz BAND

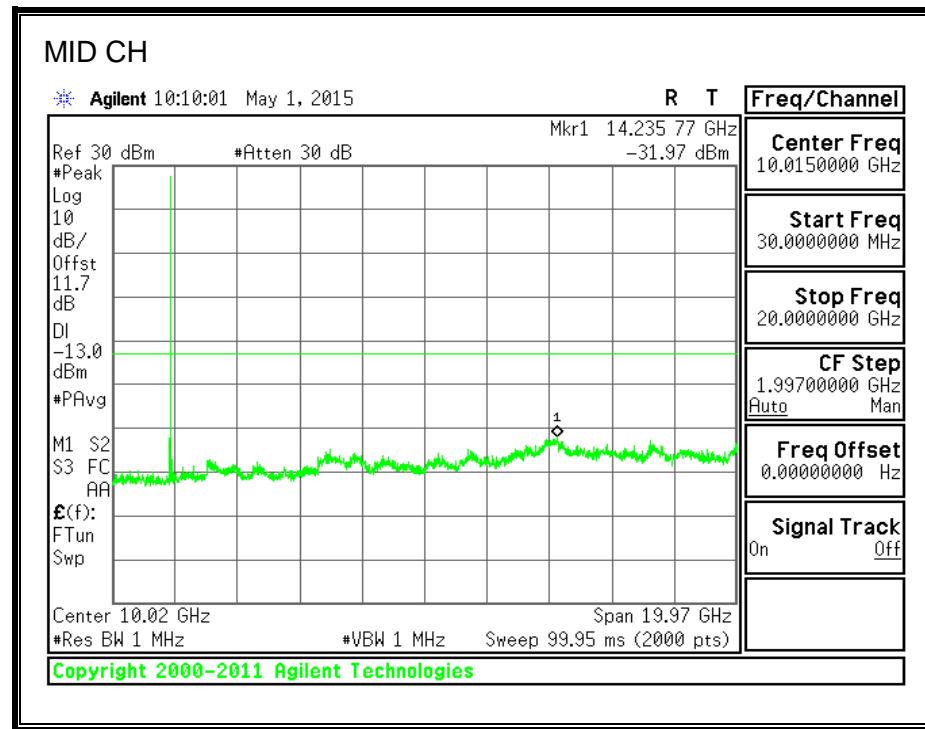
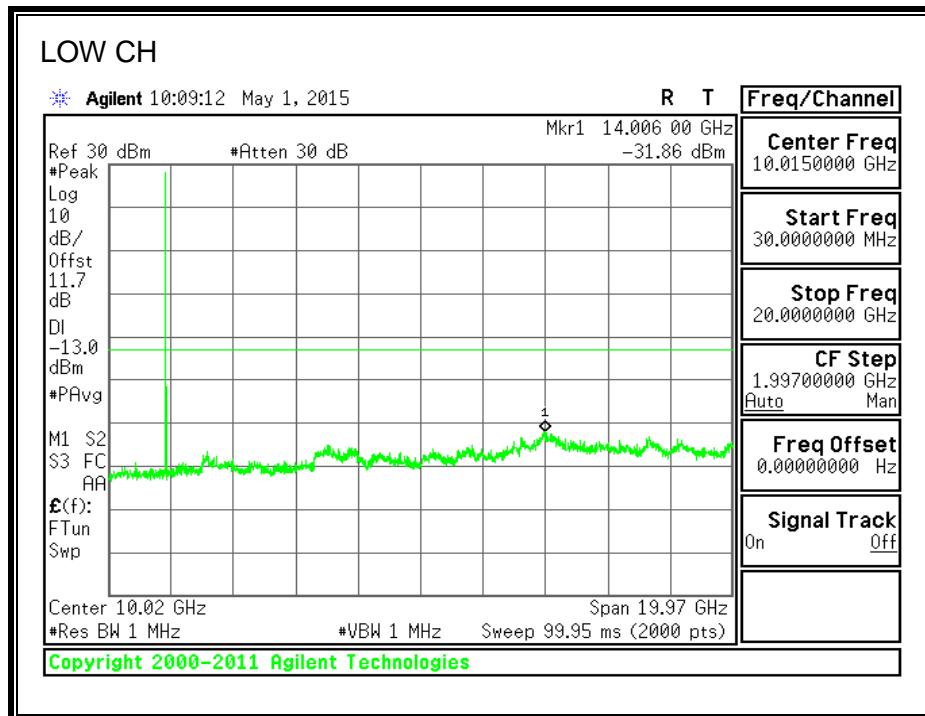


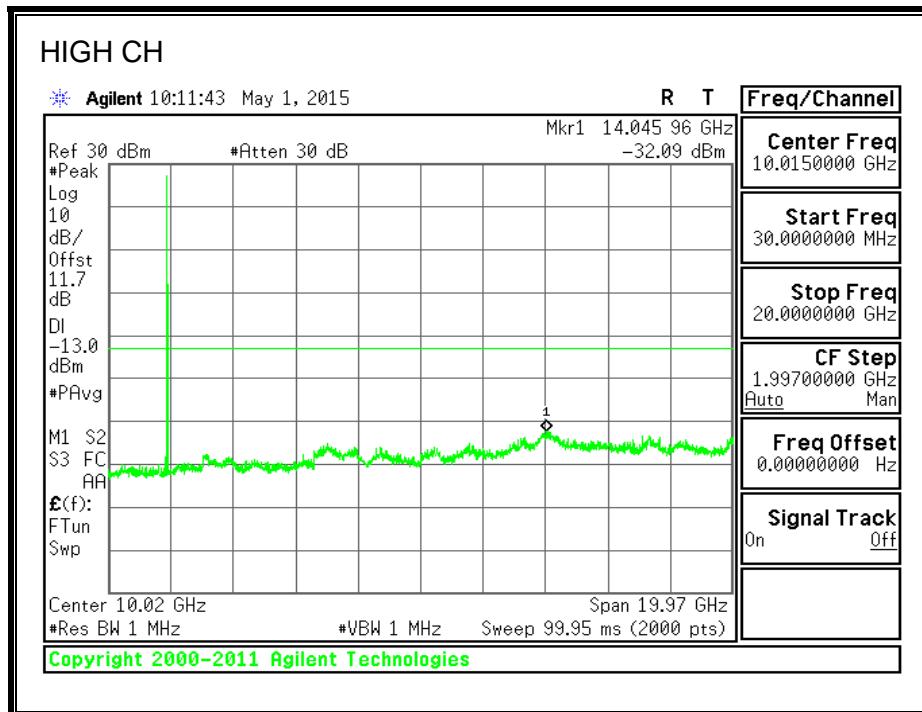
8.5.3. CDMA2000 1xRTT

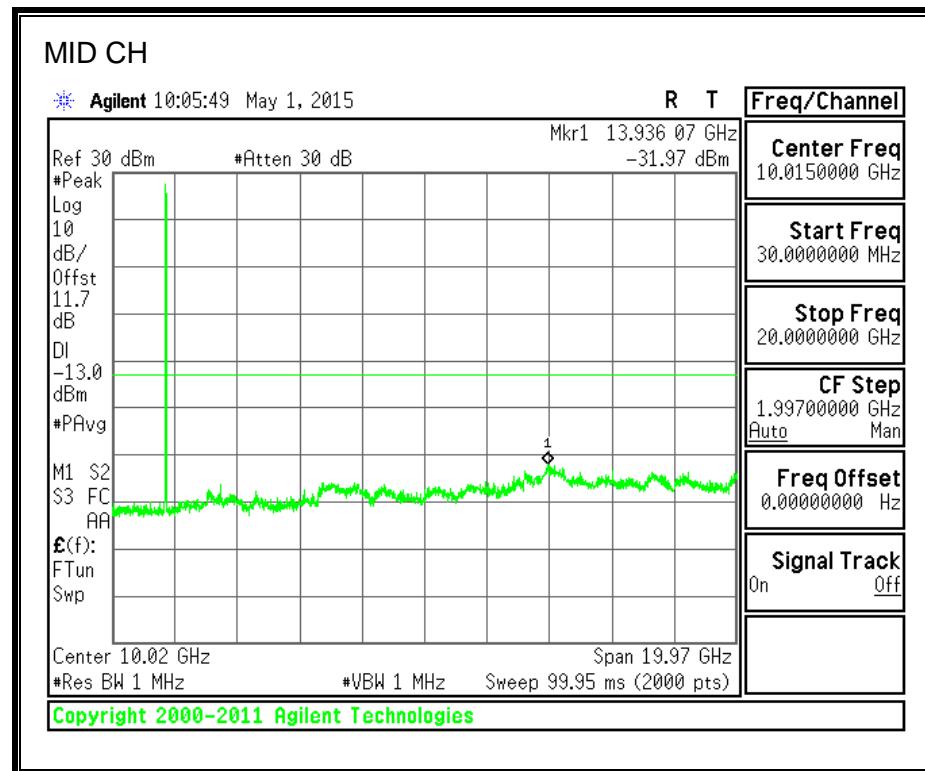
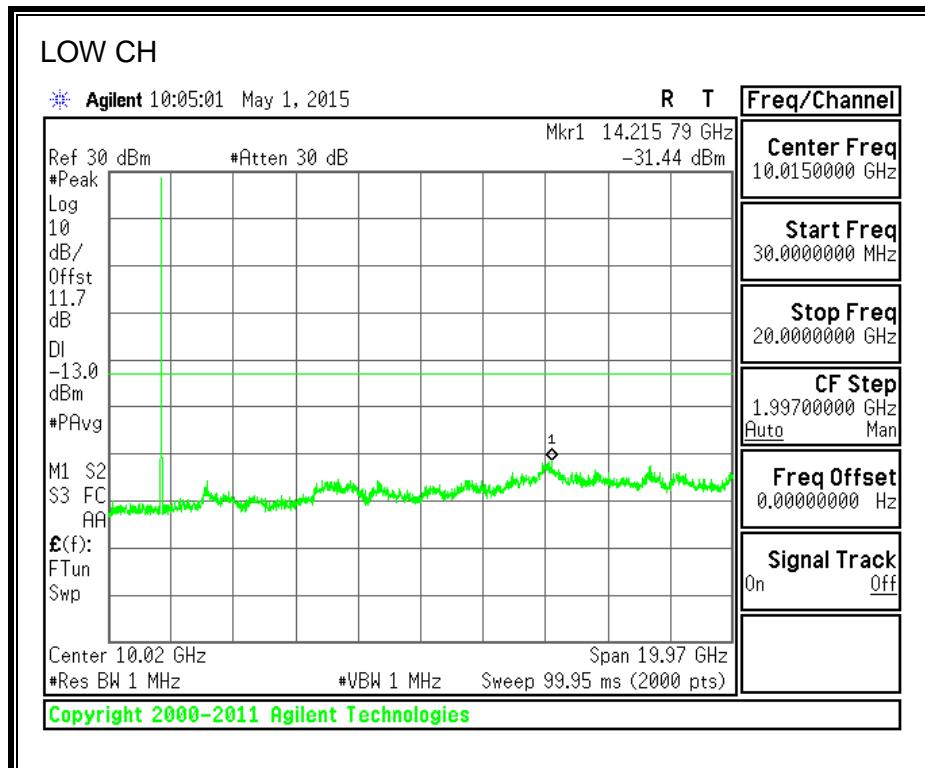
850MHz BAND

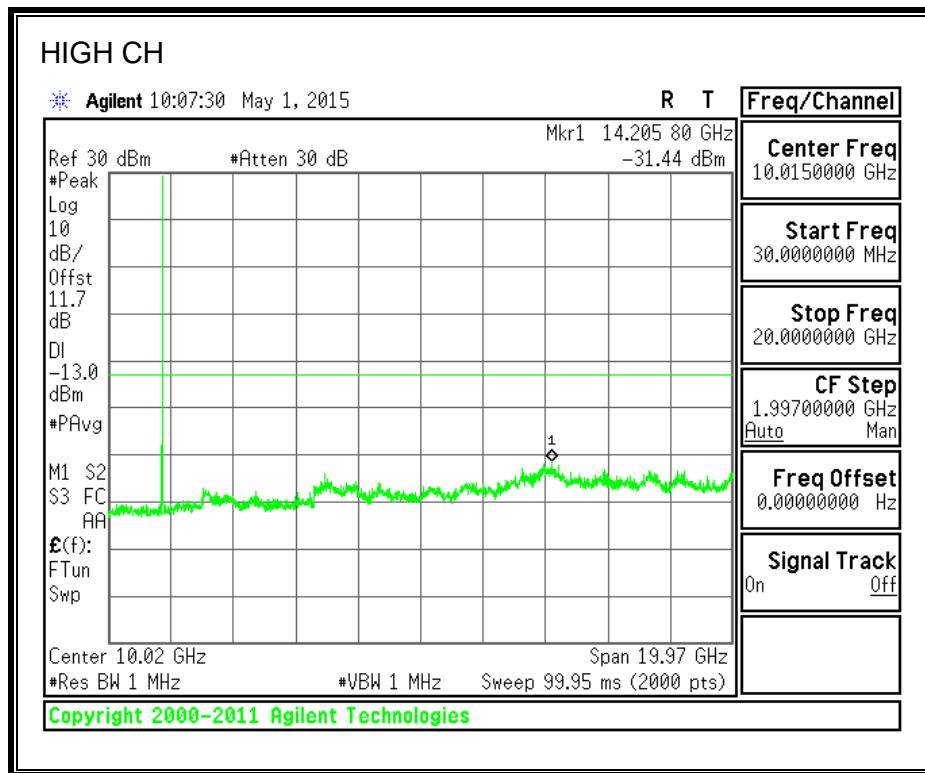


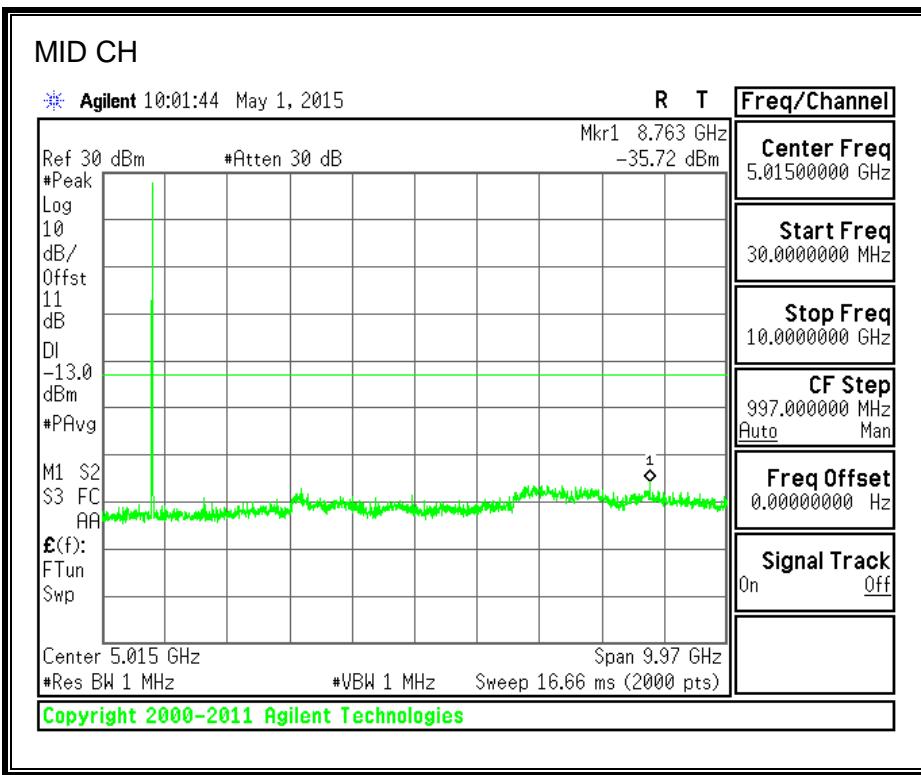
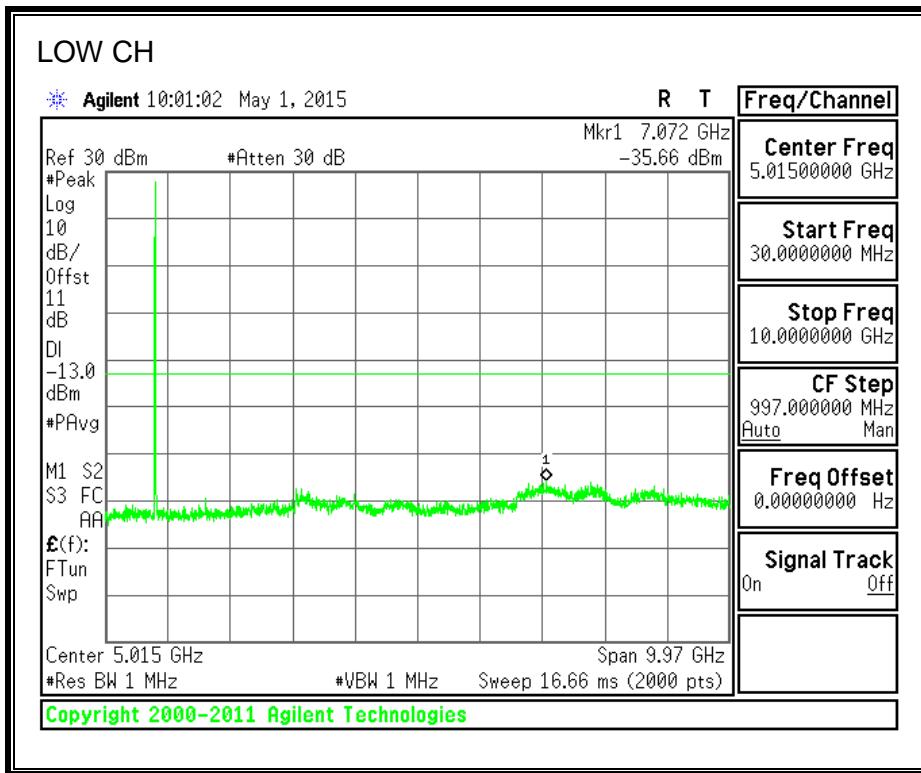


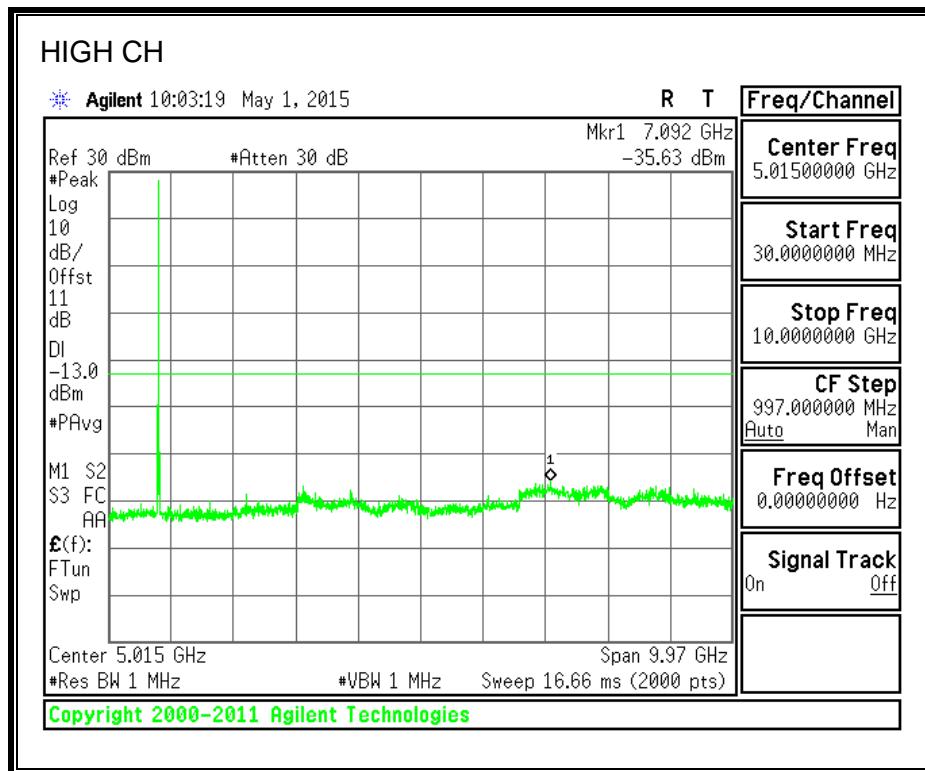
1900MHz BAND

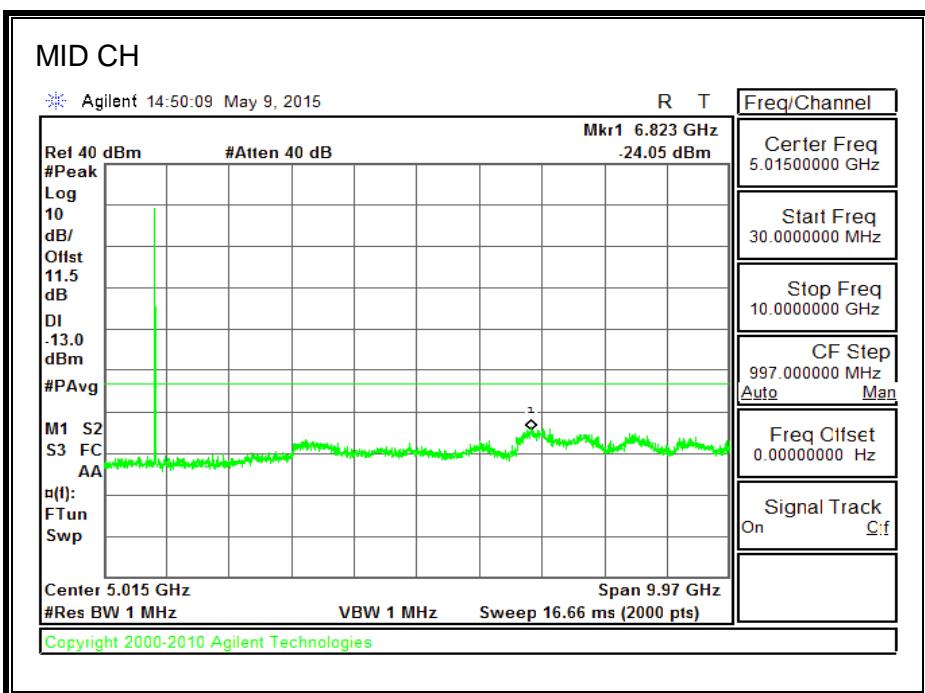
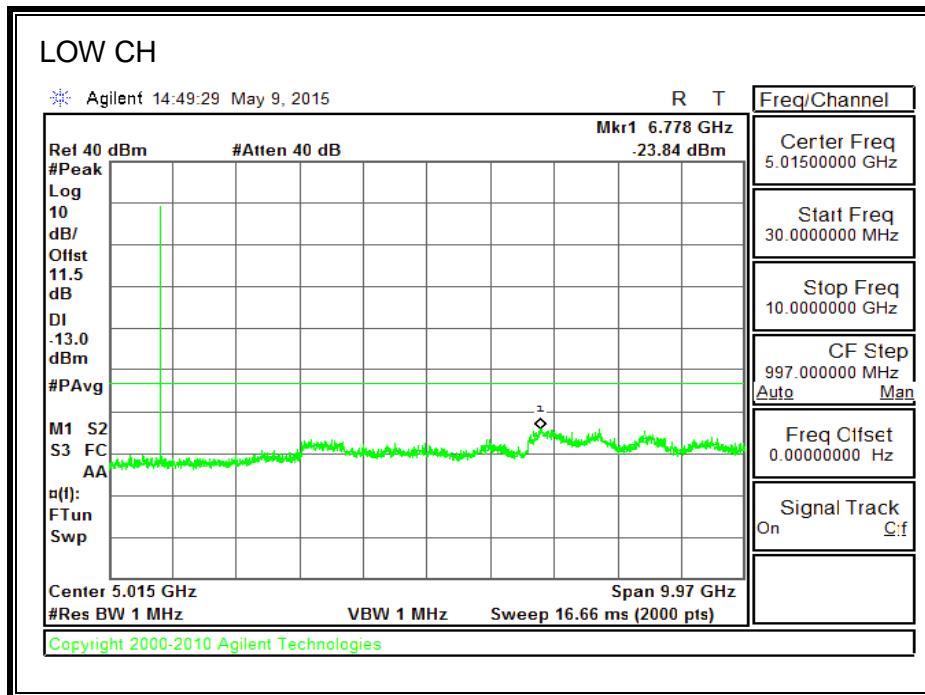


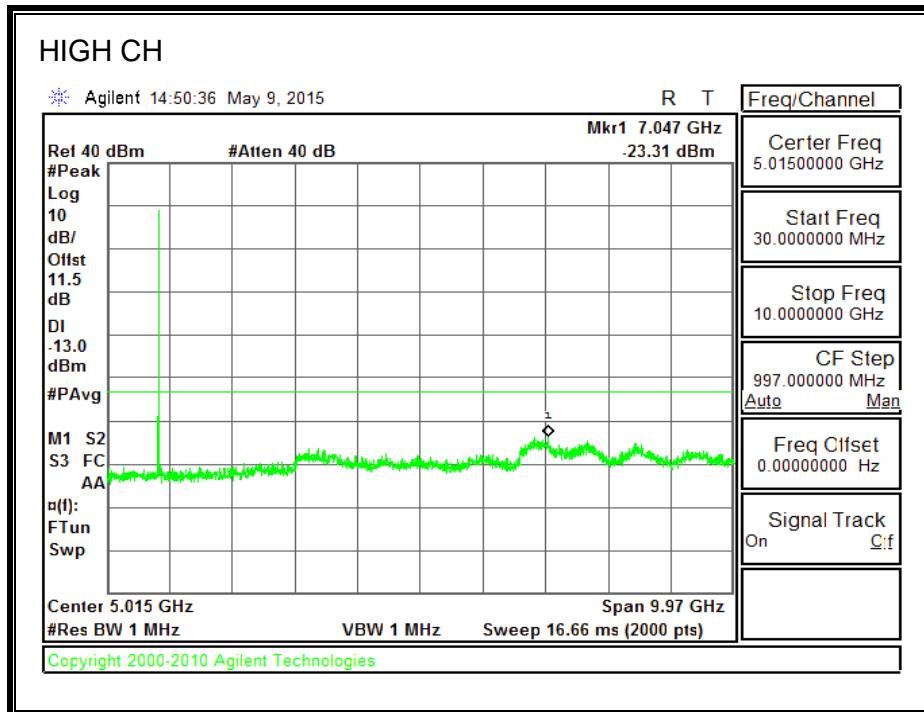
1700MHz BAND

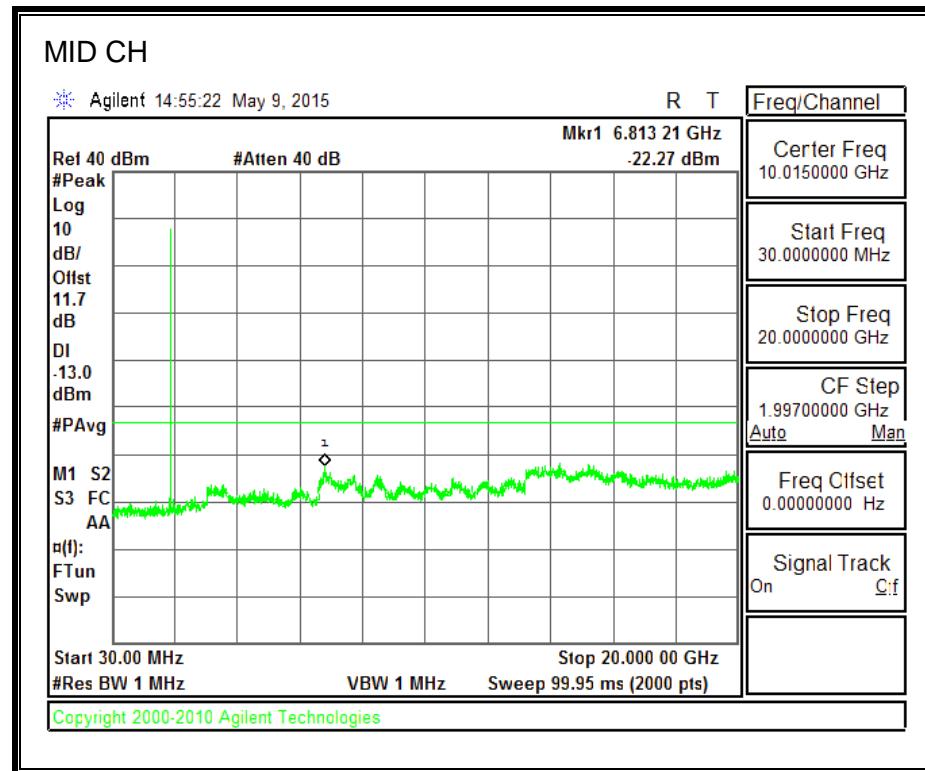
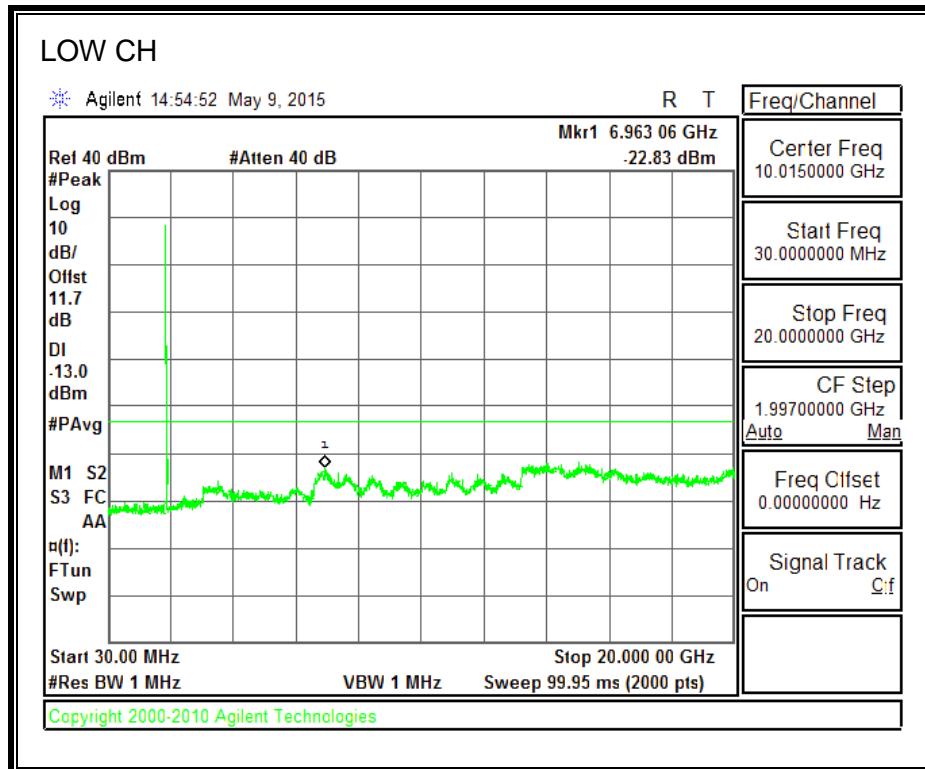


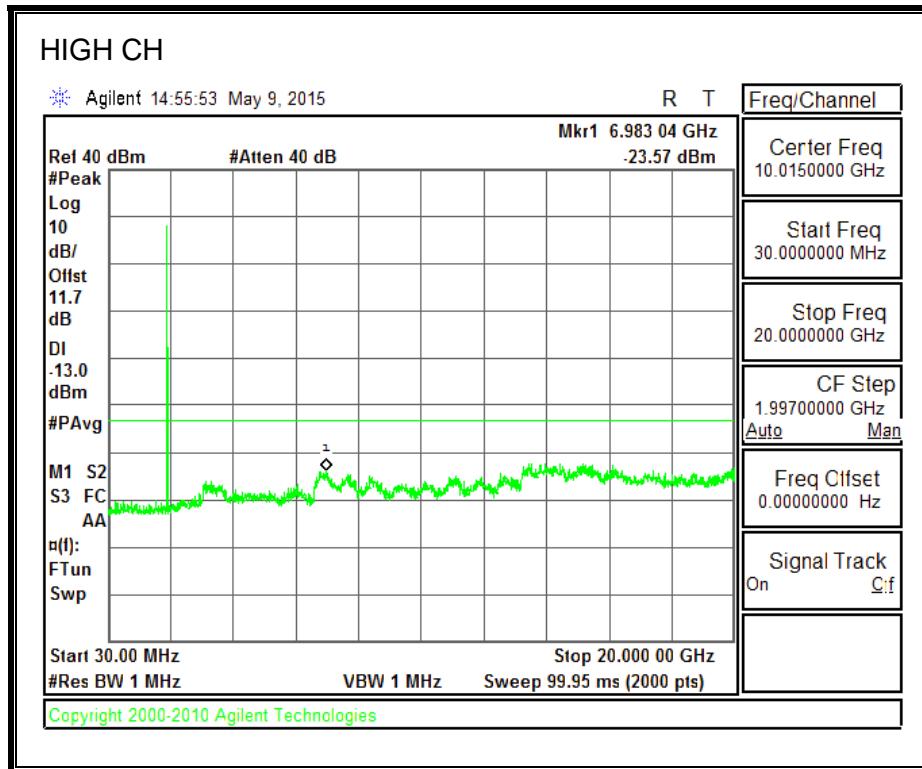
800MHz SECONDARY BAND

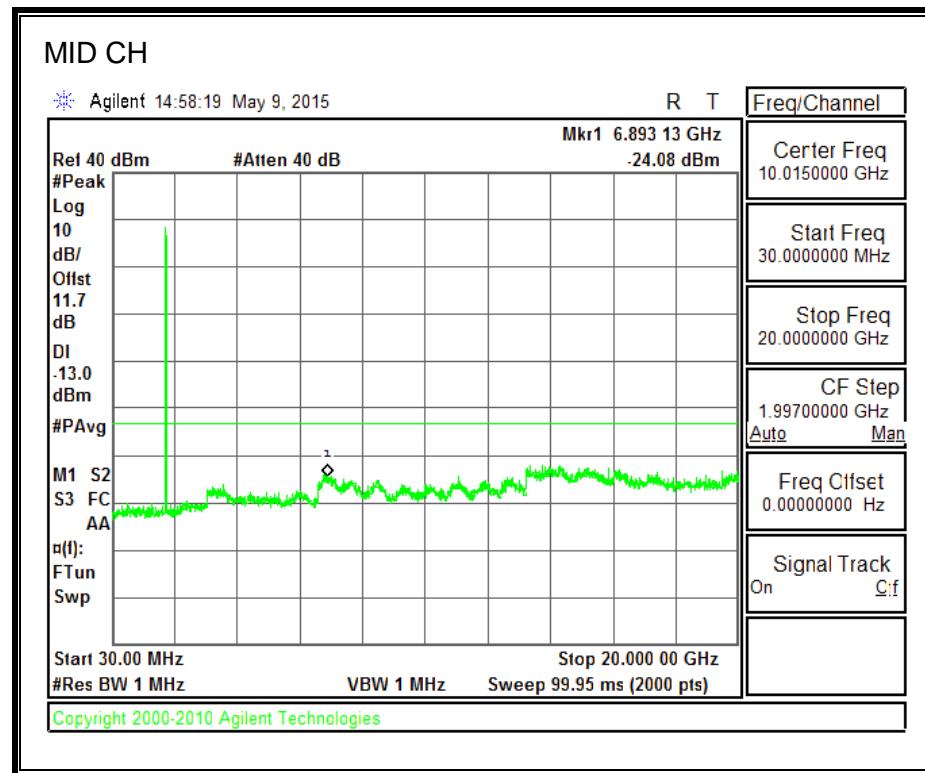
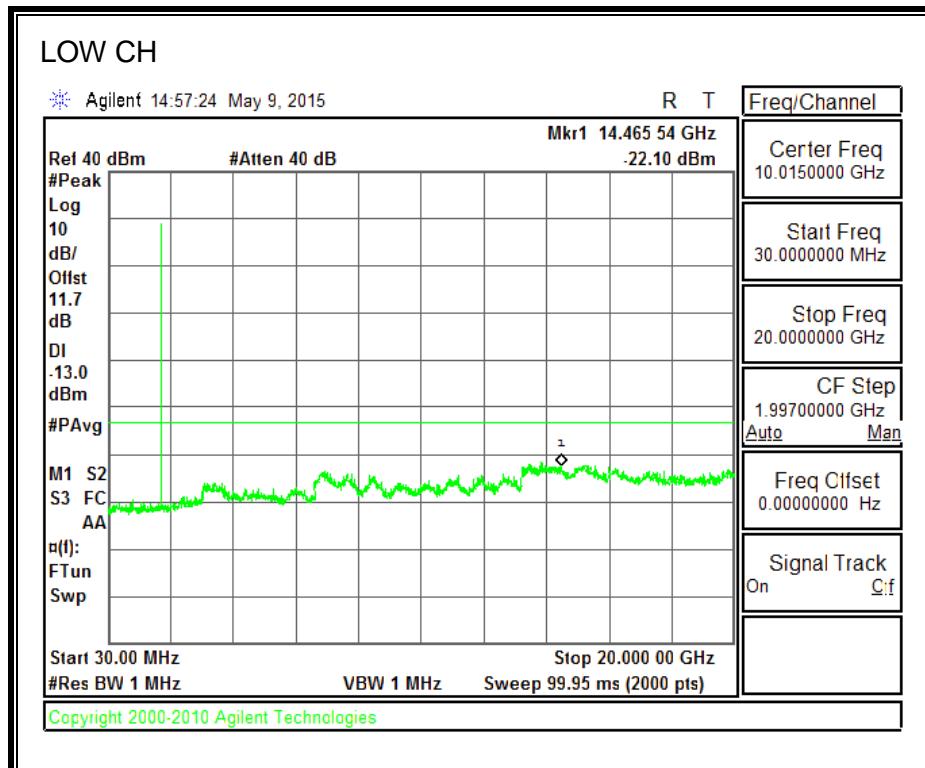


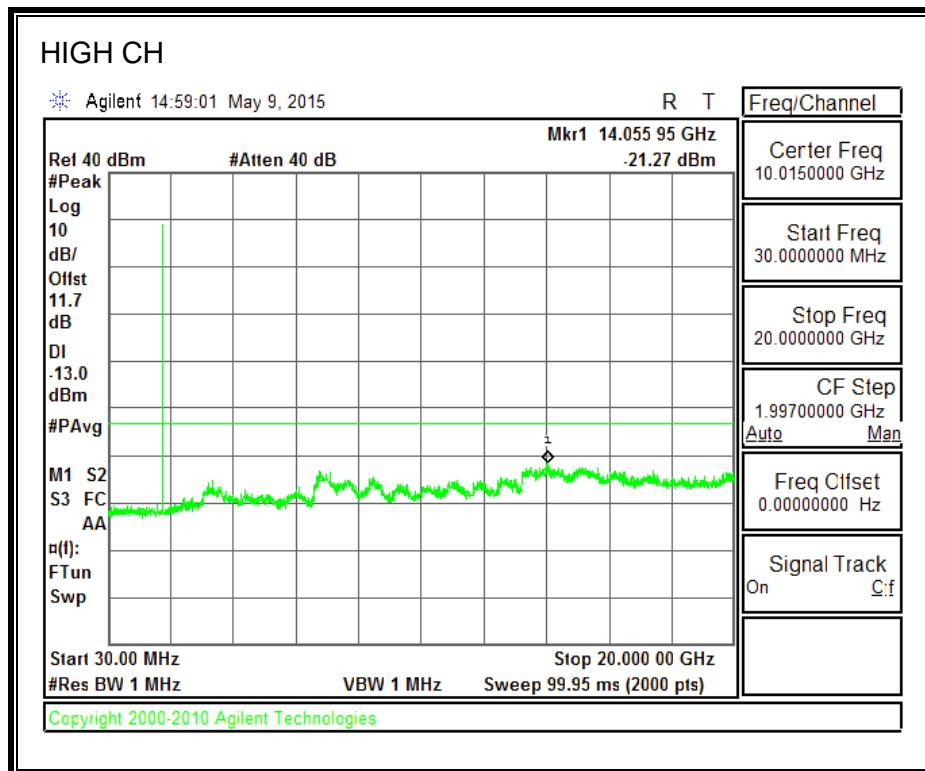
8.5.4. CDMA2000 REV A**850MHz BAND**

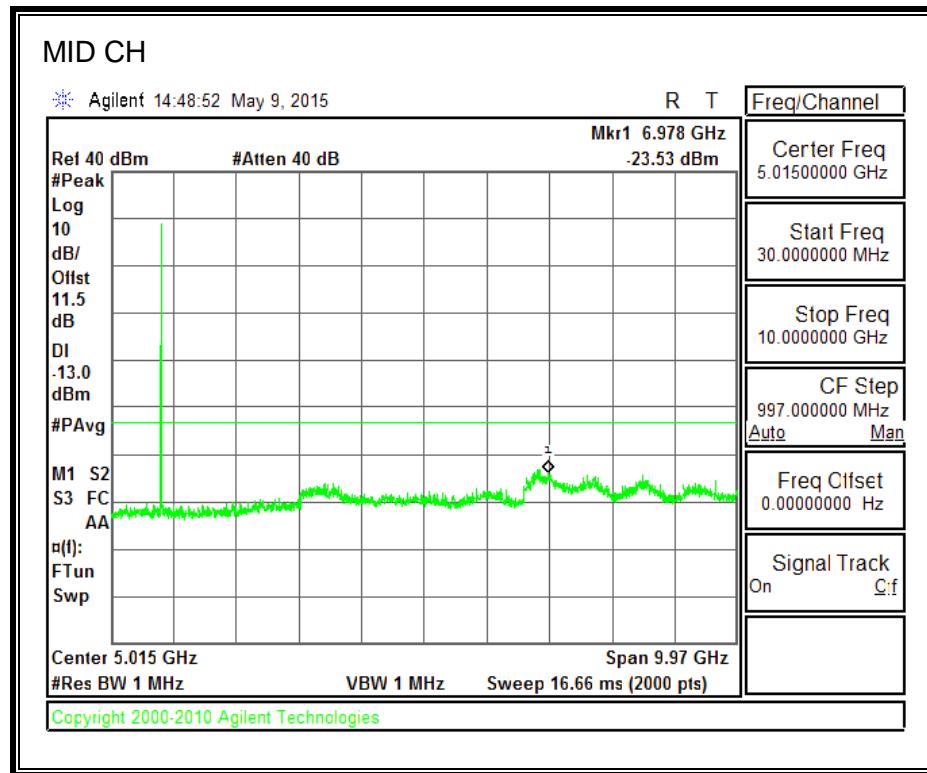
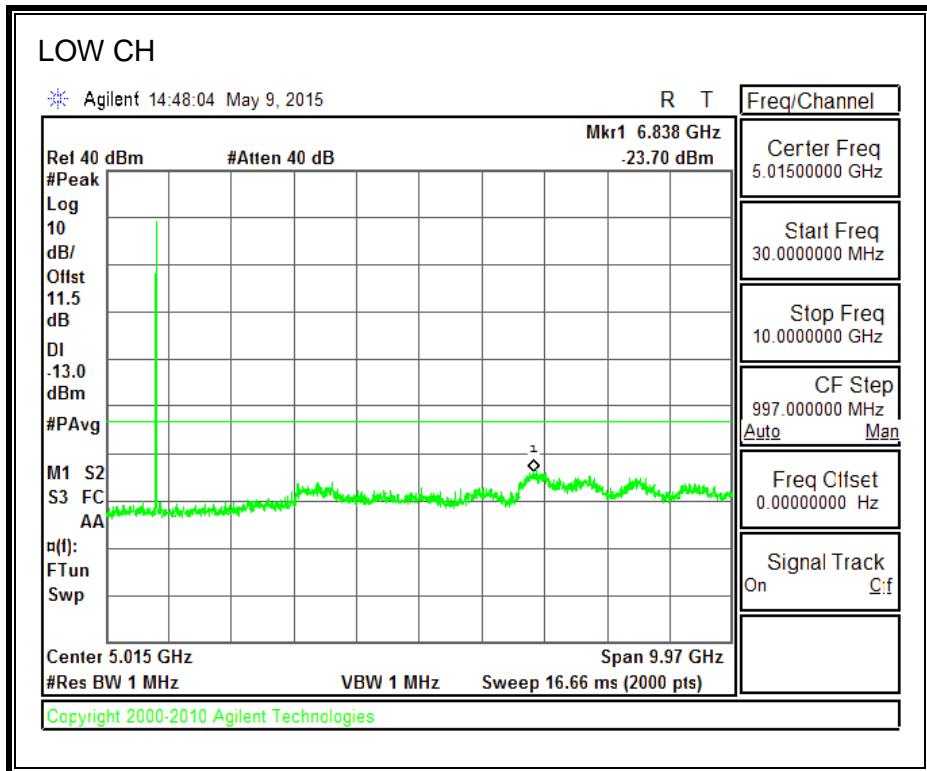


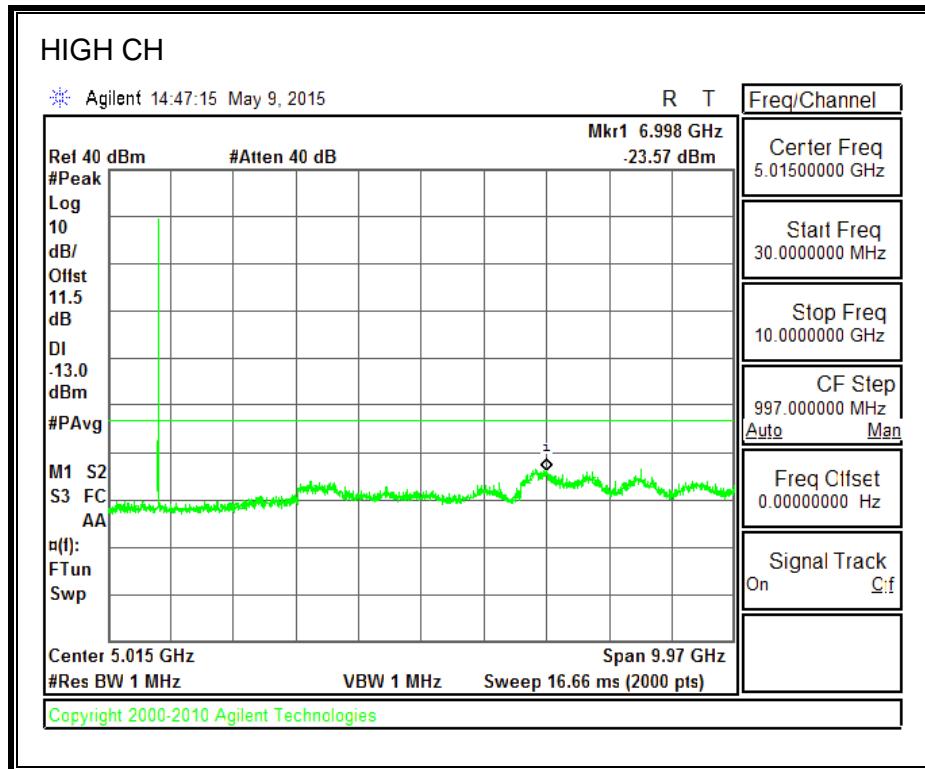
1900MHz BAND



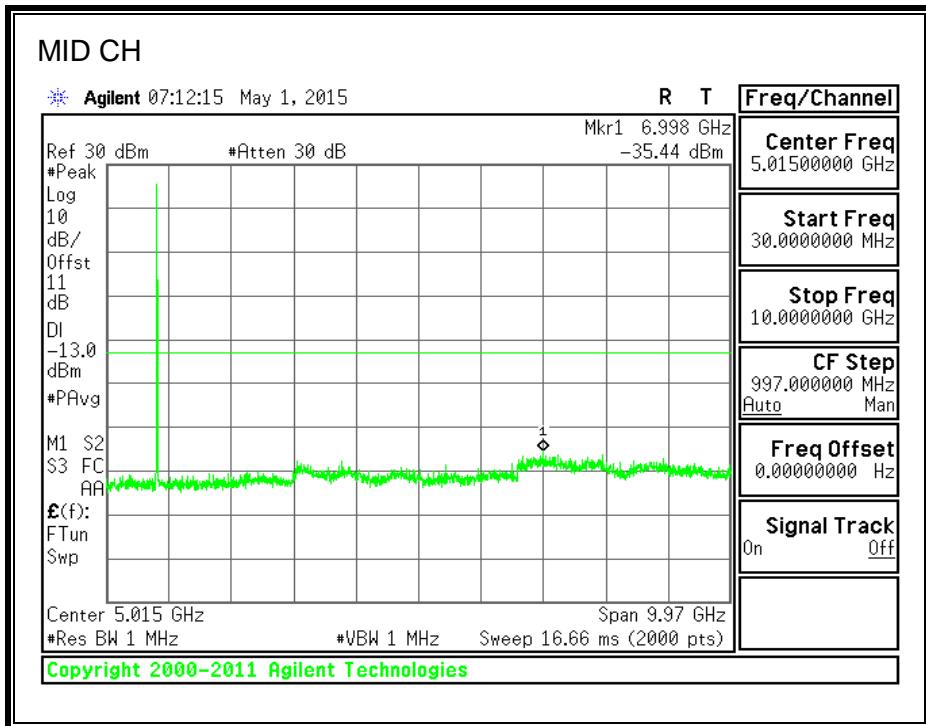
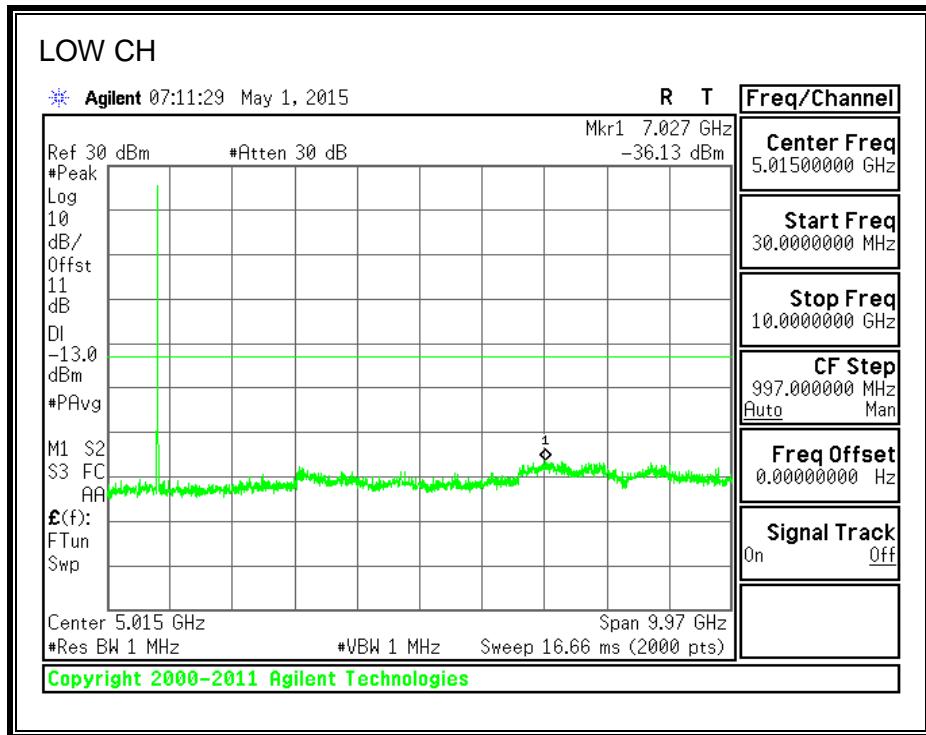
1700MHz BAND

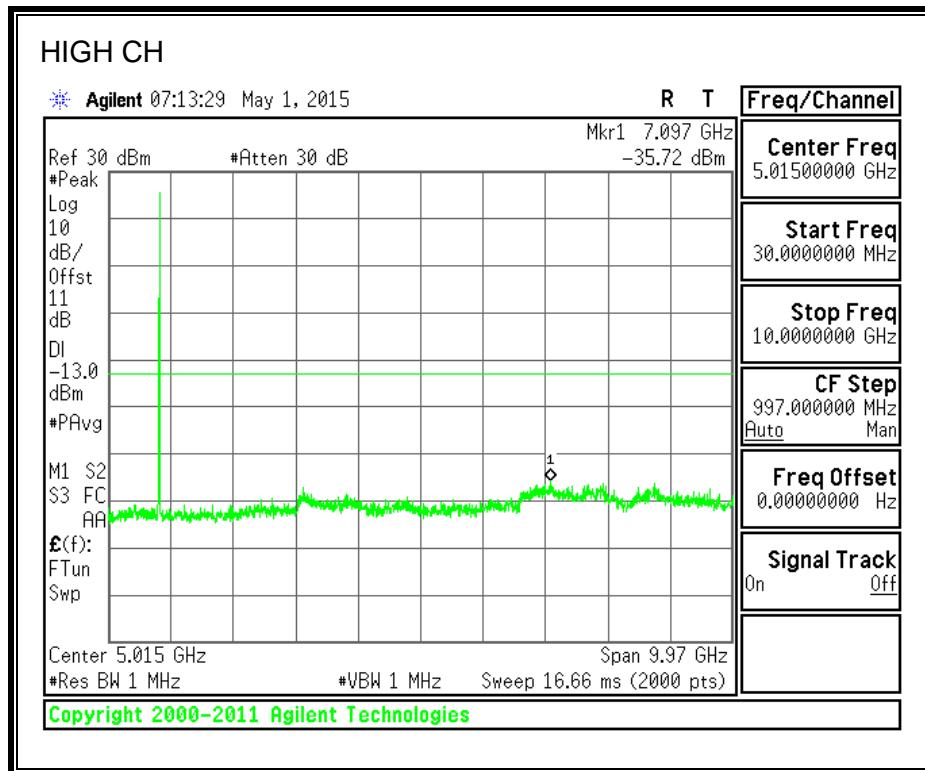


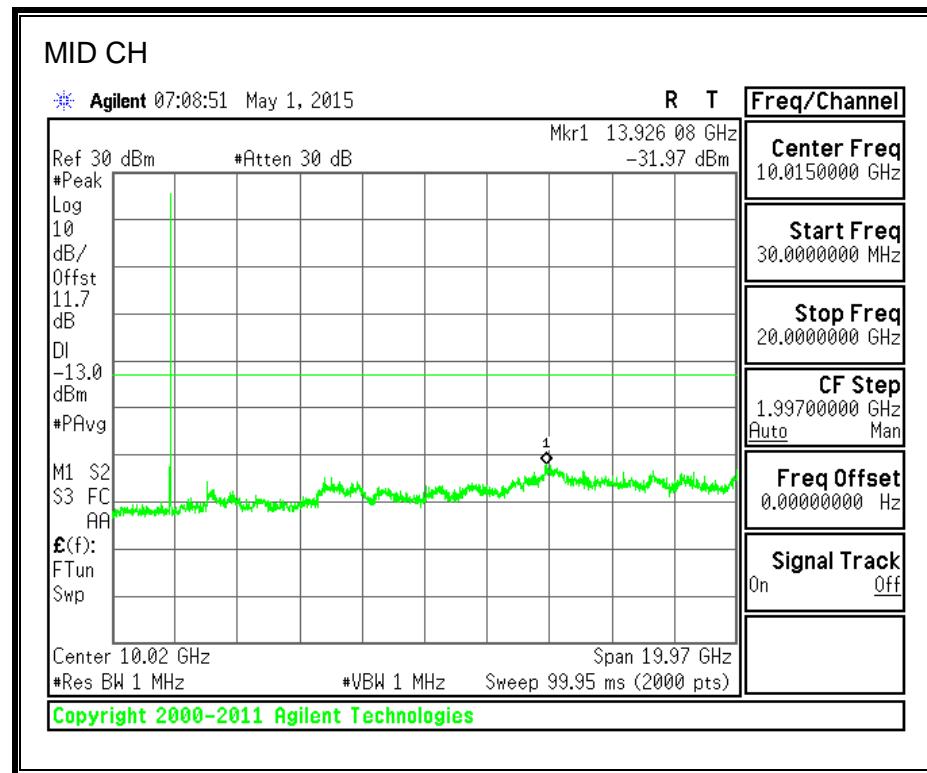
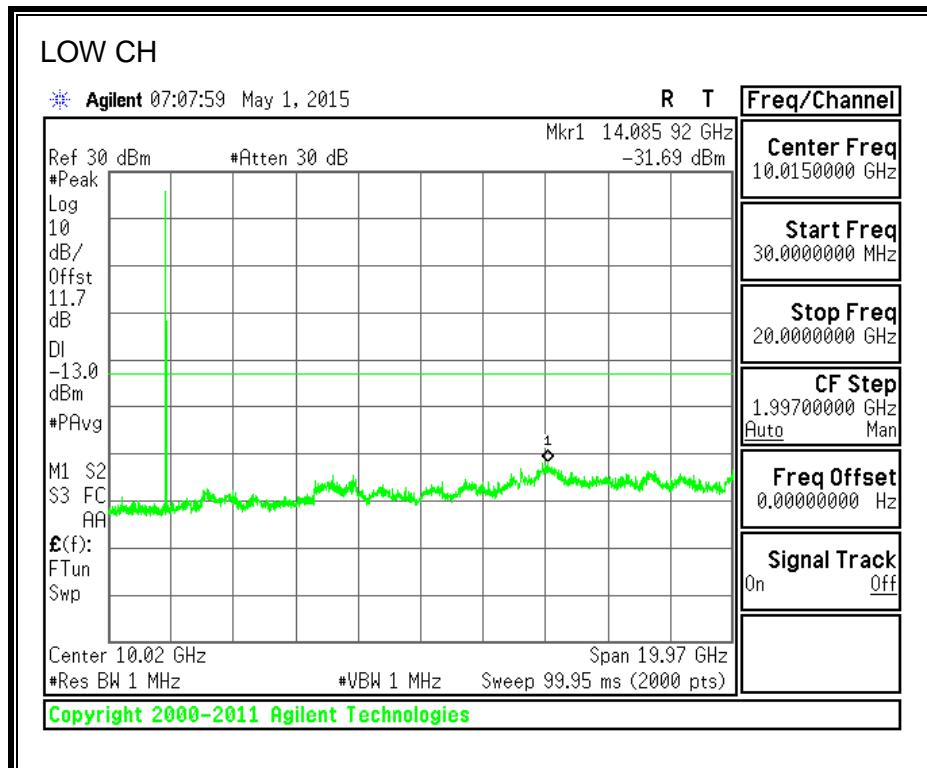
800MHz Secondary Band

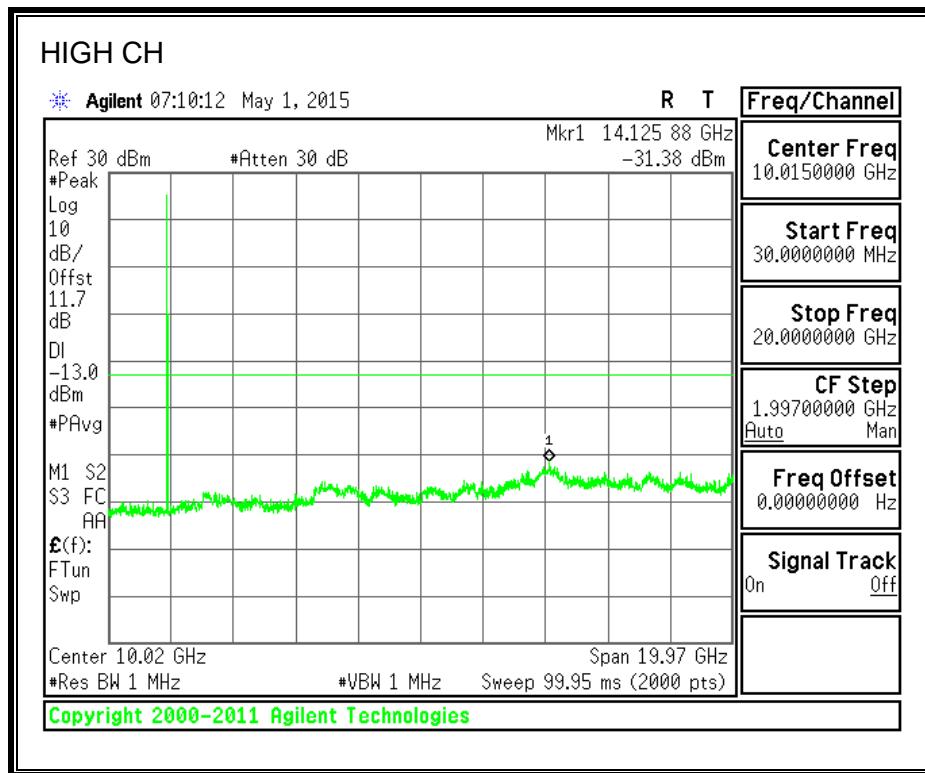


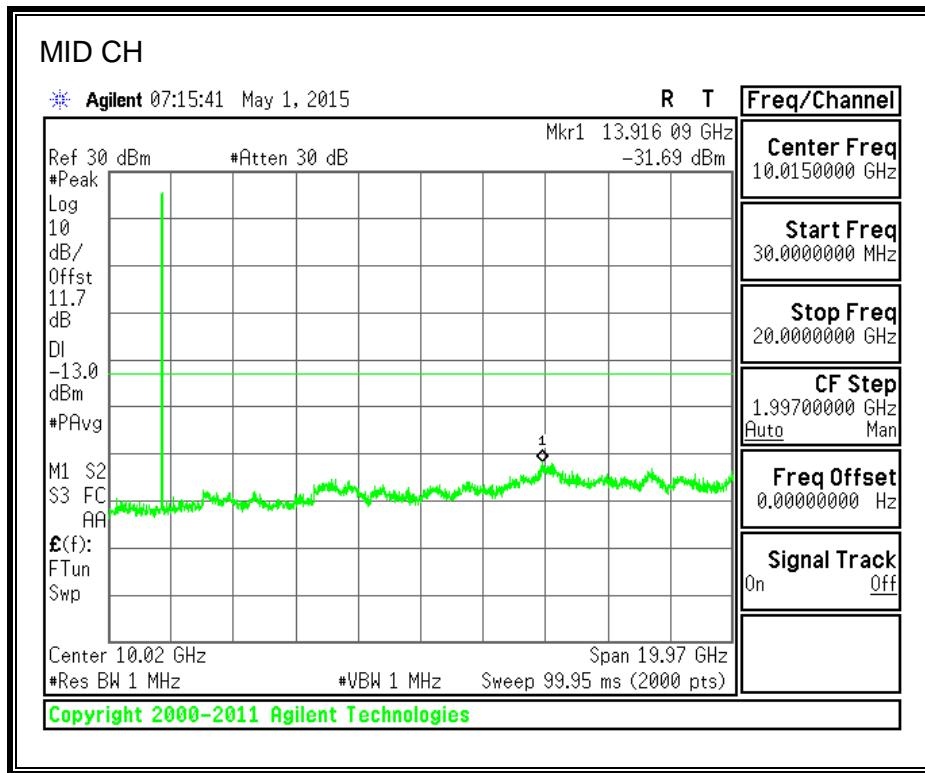
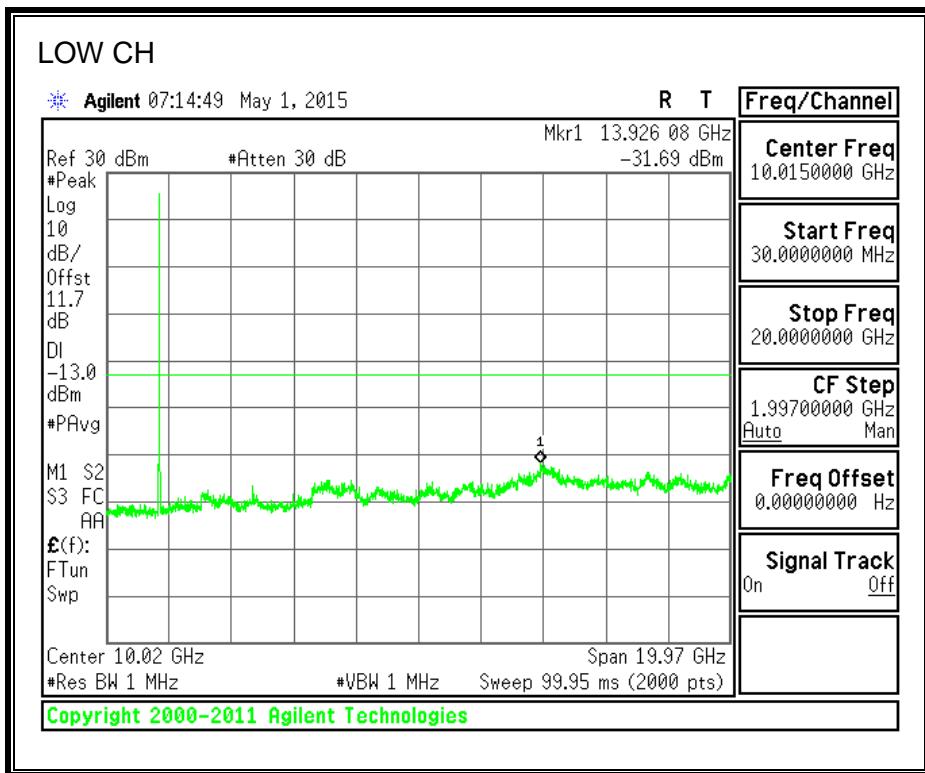
8.5.5. UMTS REL 99

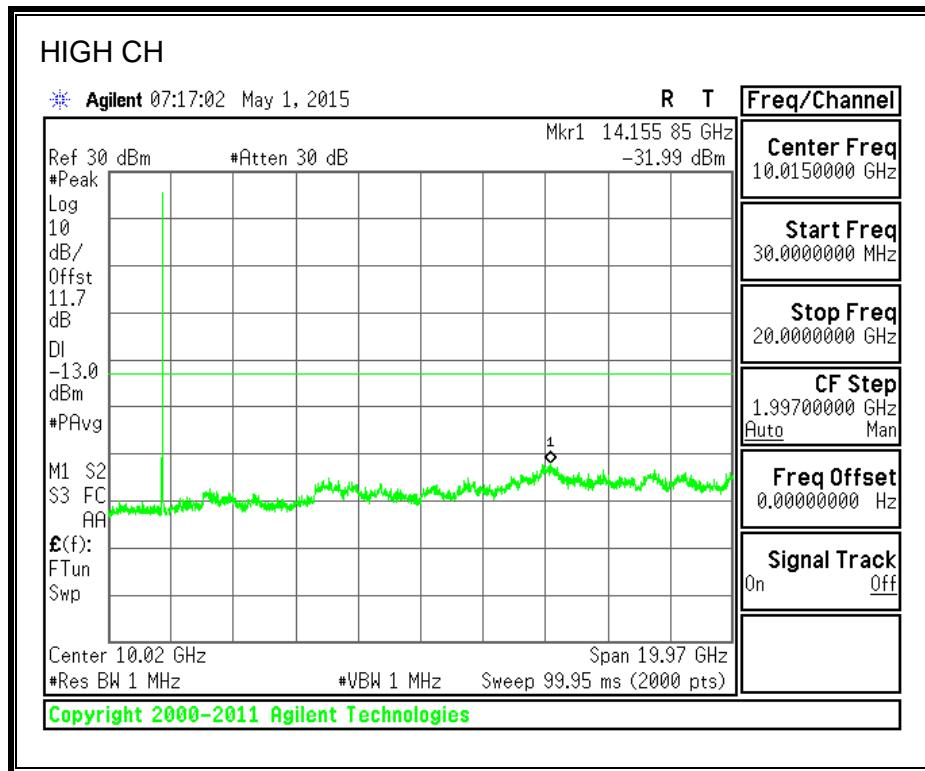
850MHz BAND



1900MHz BAND

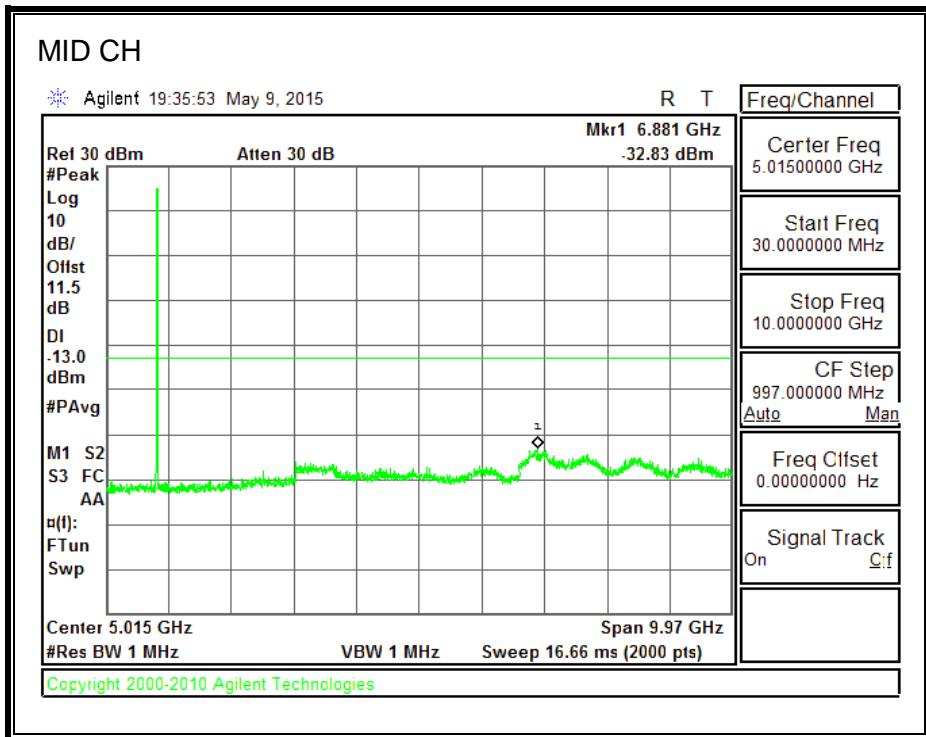
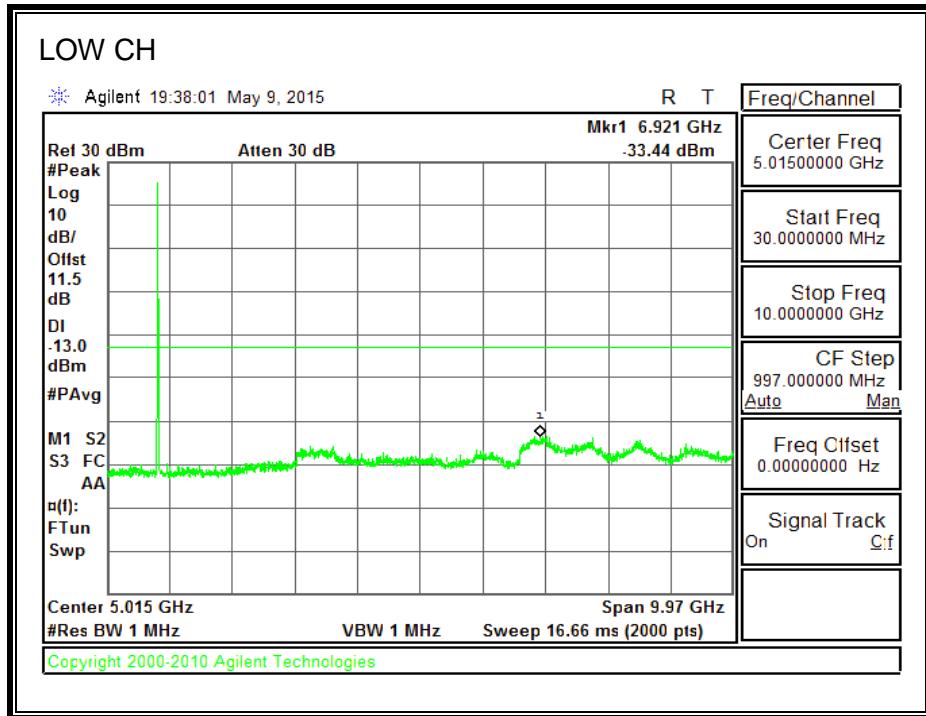


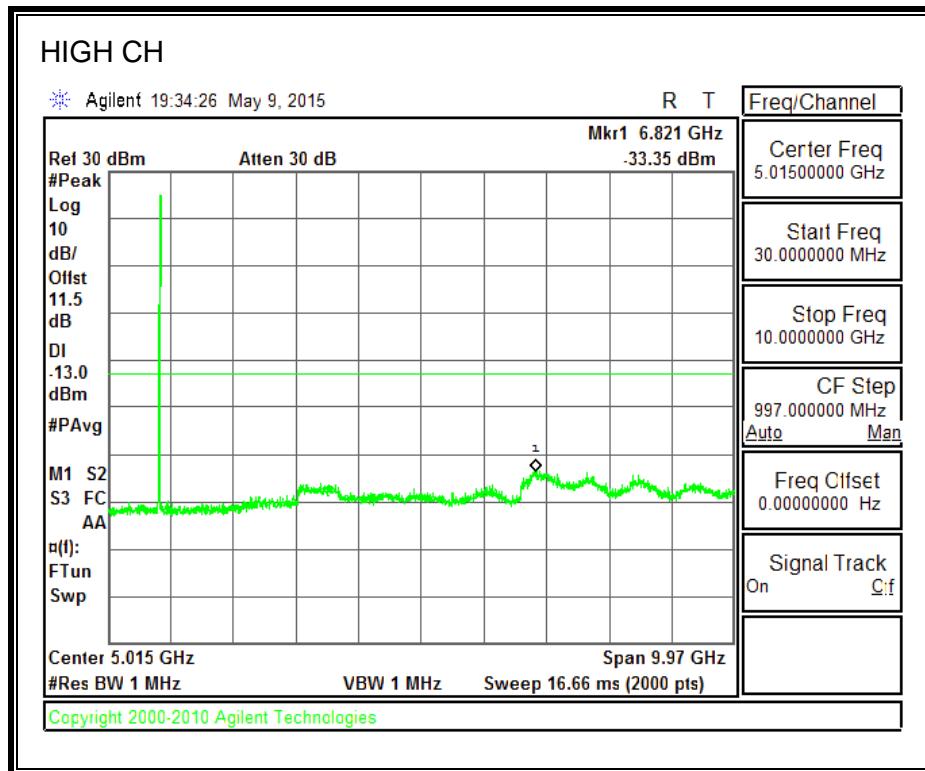
1700MHz BAND

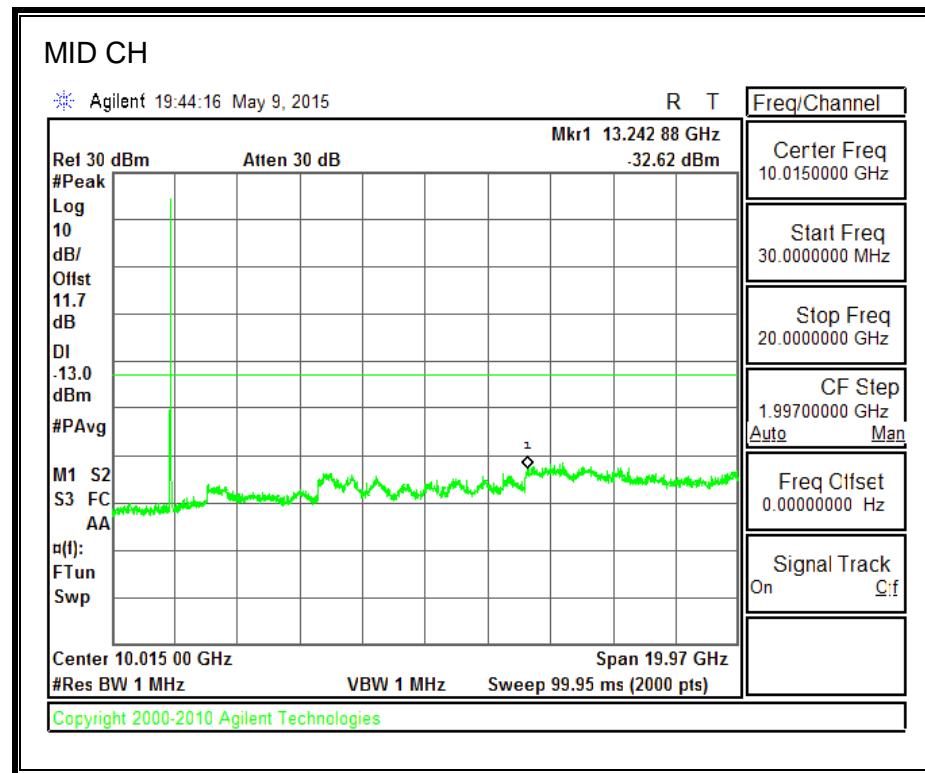
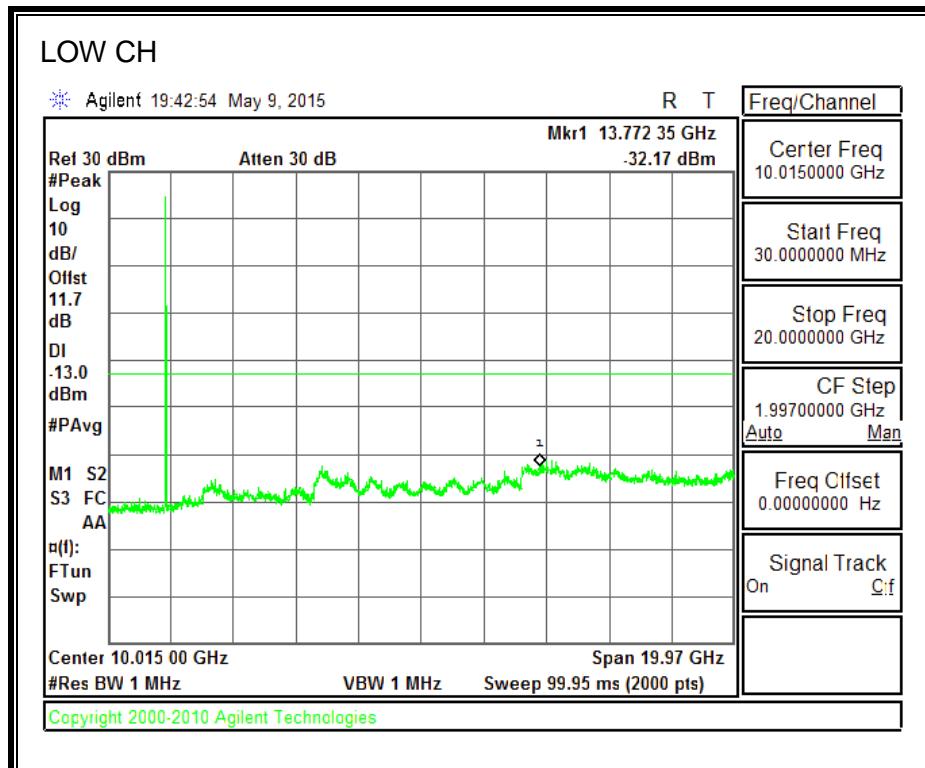


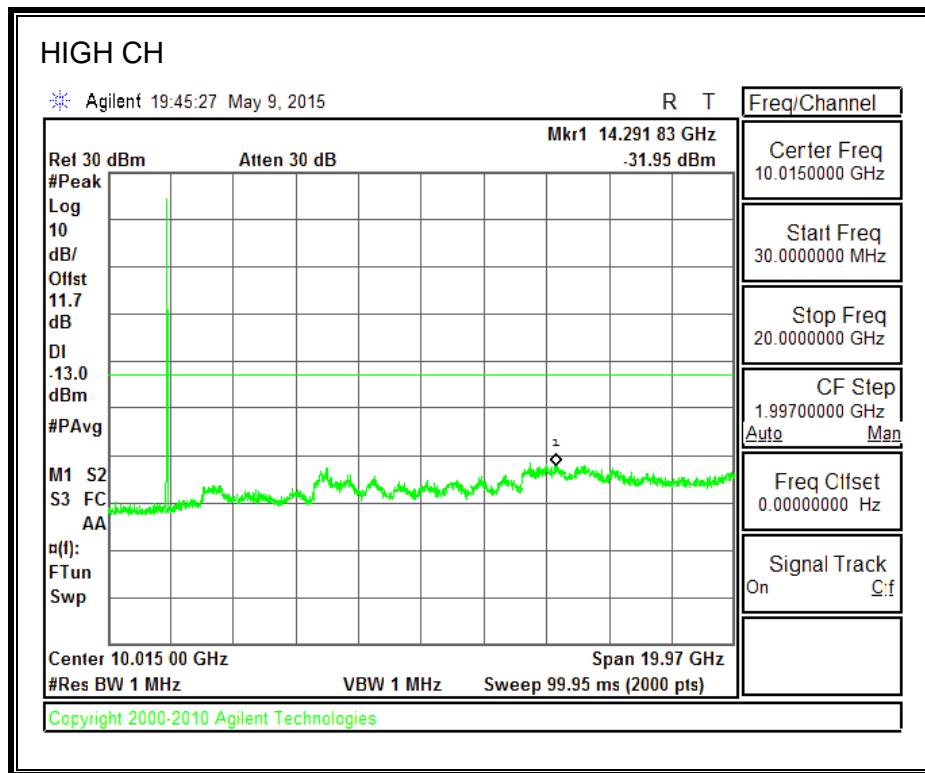
8.5.6. UMTS HSDPA

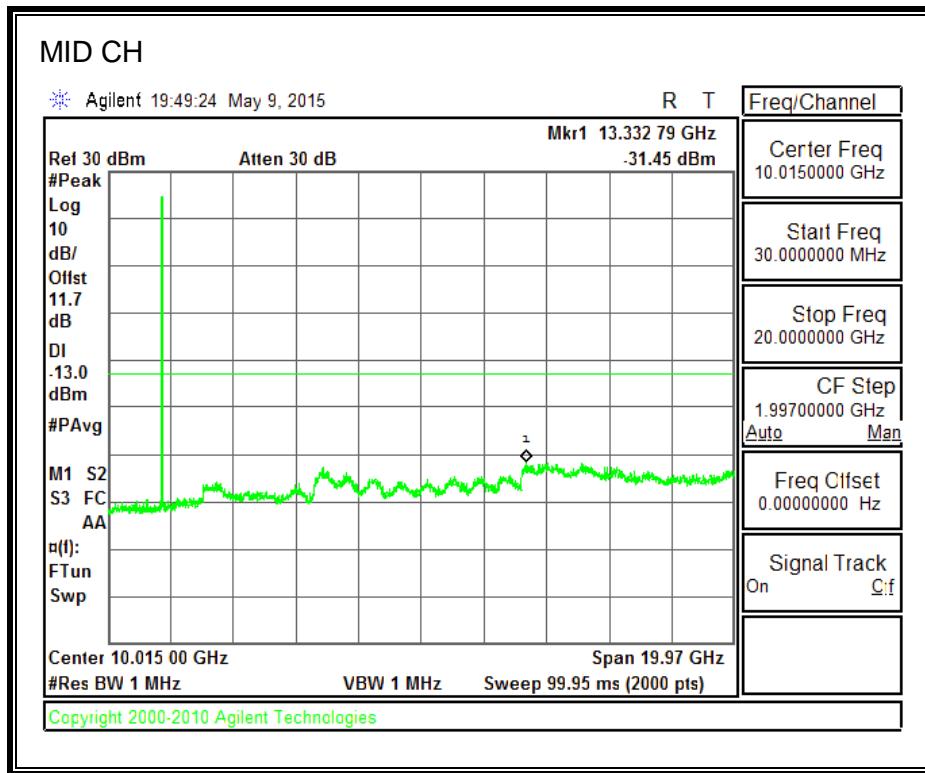
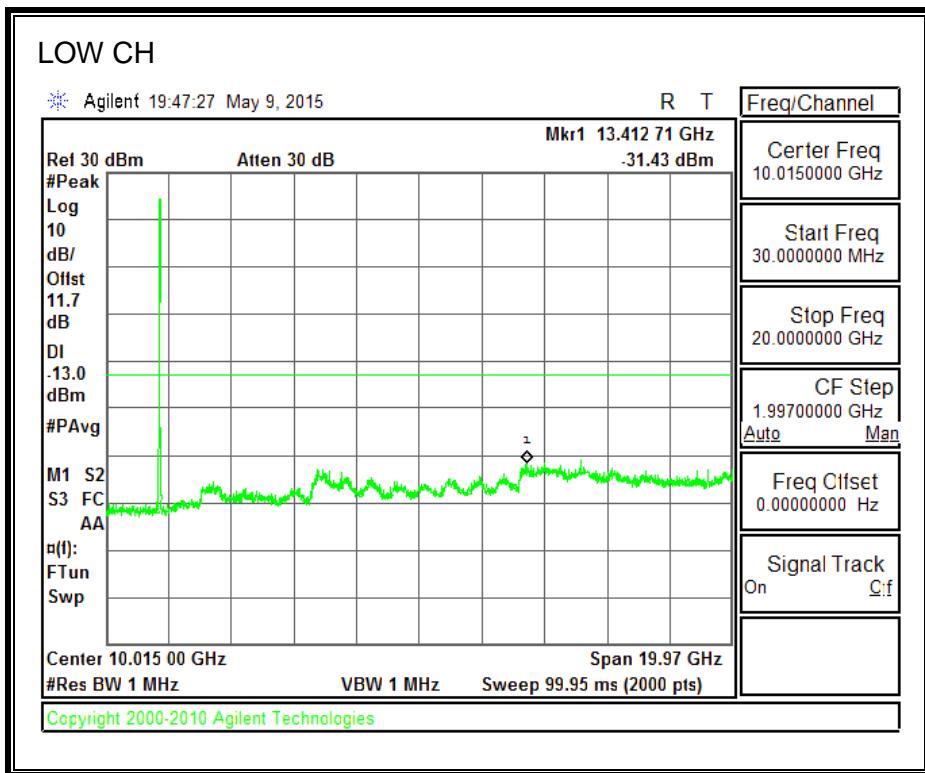
850MHz BAND

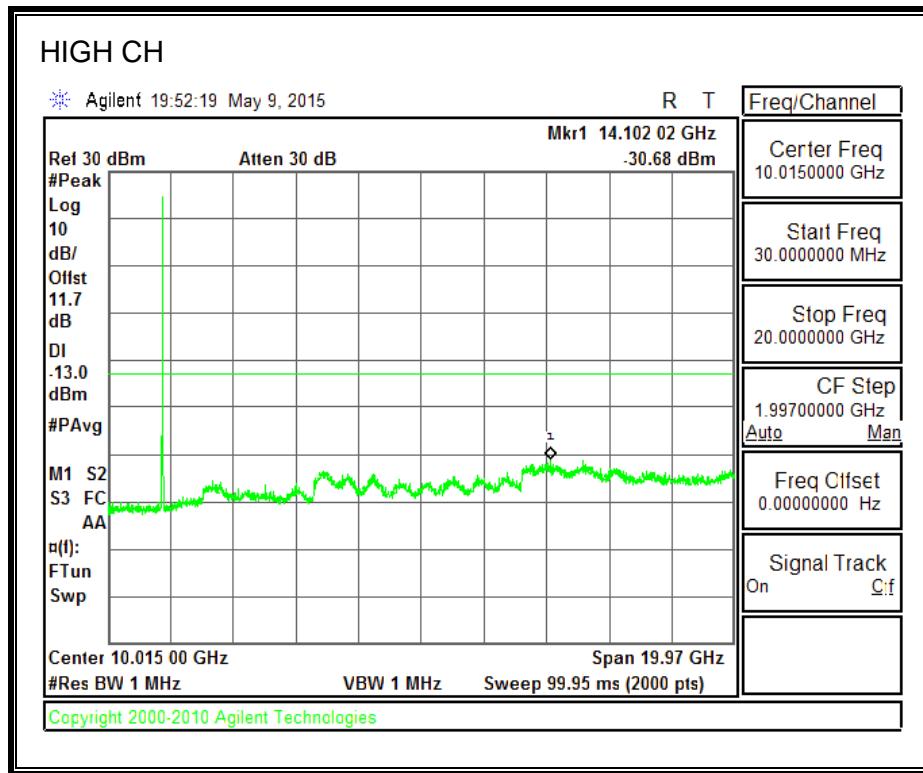




1900MHz BAND



1700MHz BAND



8.6. OUT OF BAND EMISSIONS (MODEL: A1687)

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238 and §90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

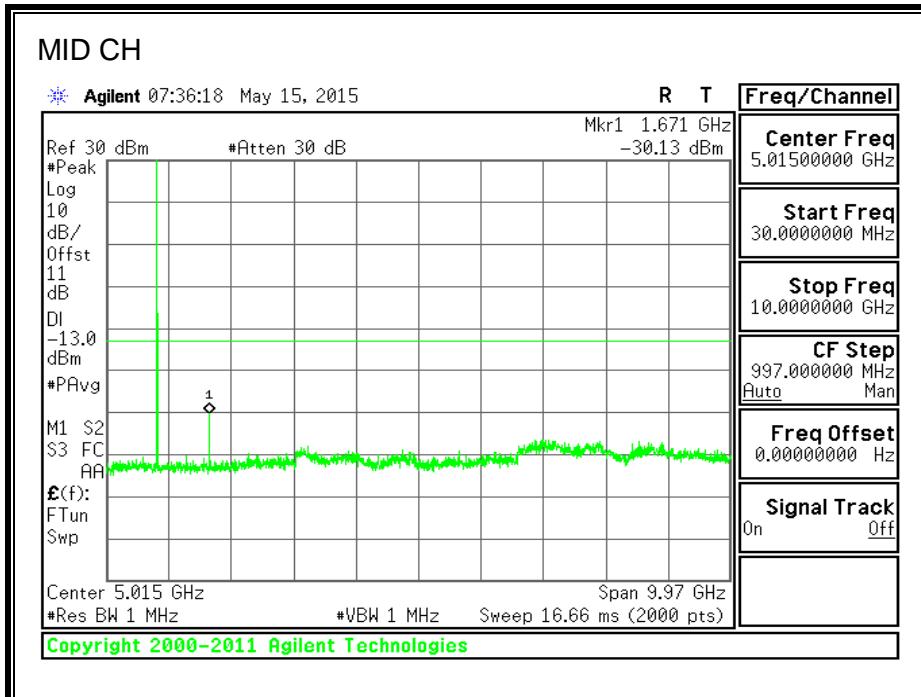
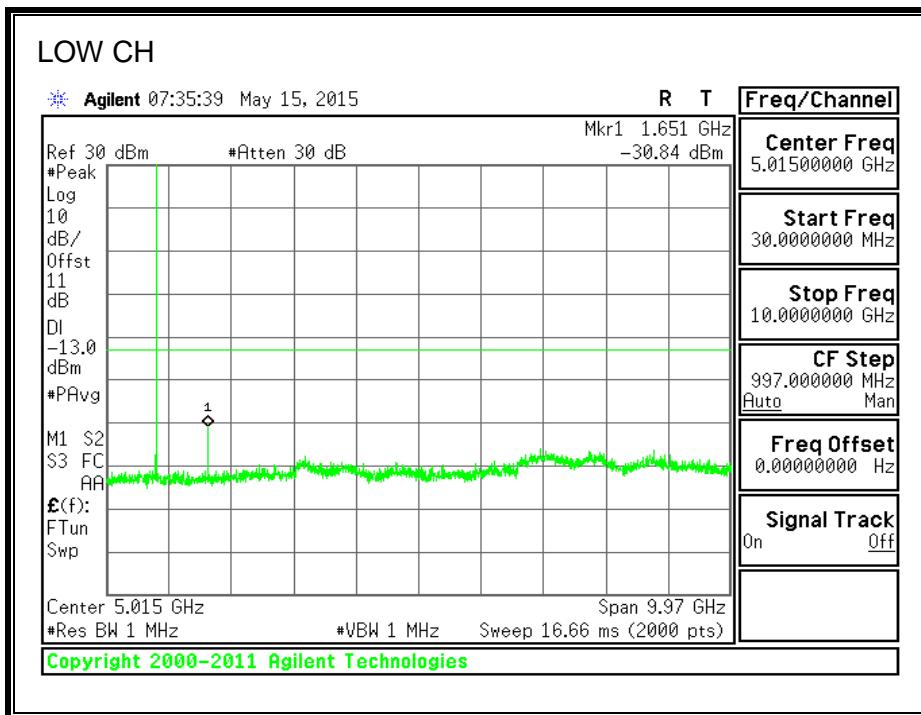
For each out of band emissions measurement:

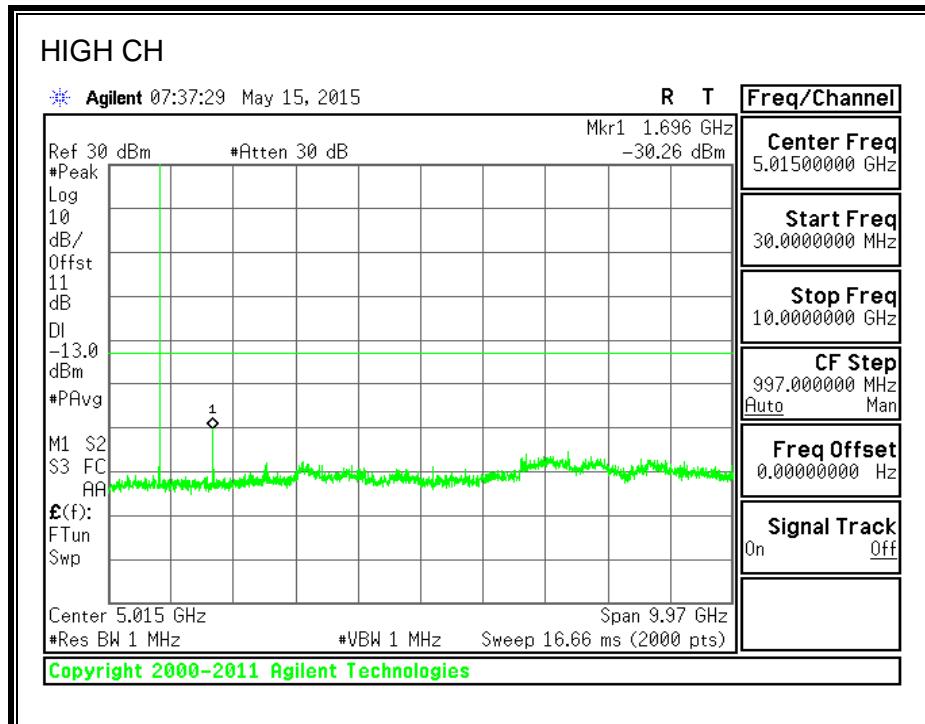
- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

RESULTS

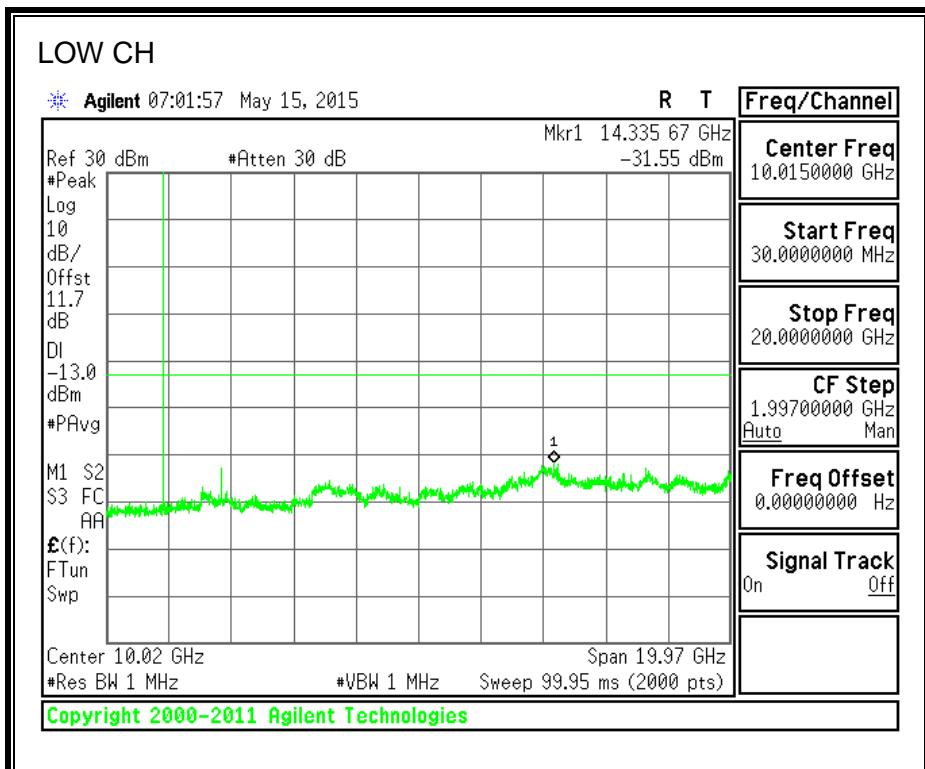
8.6.1. GSM-GPRS

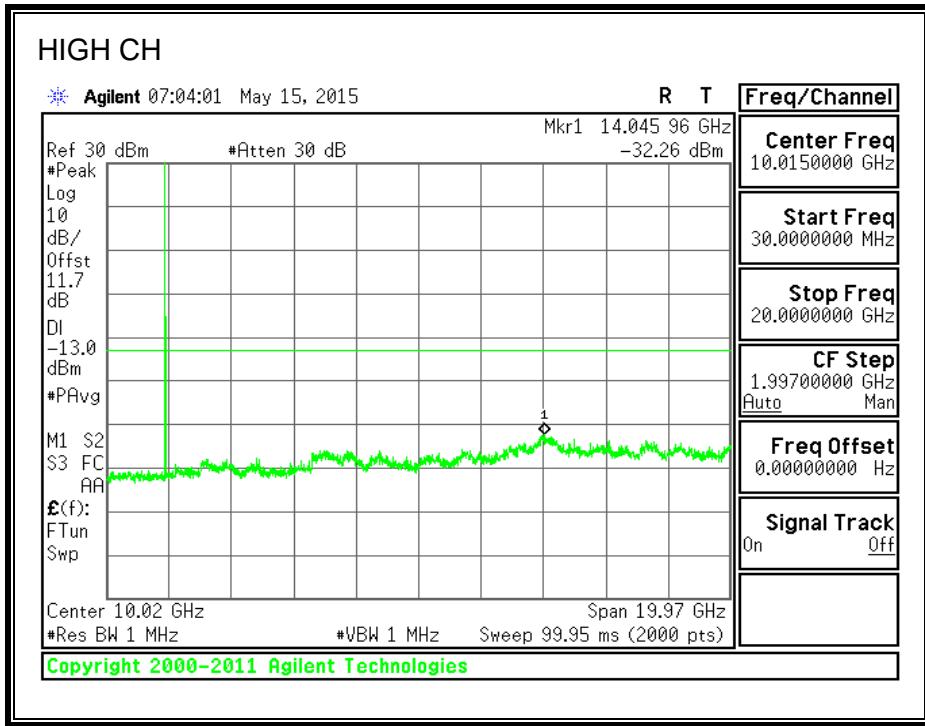
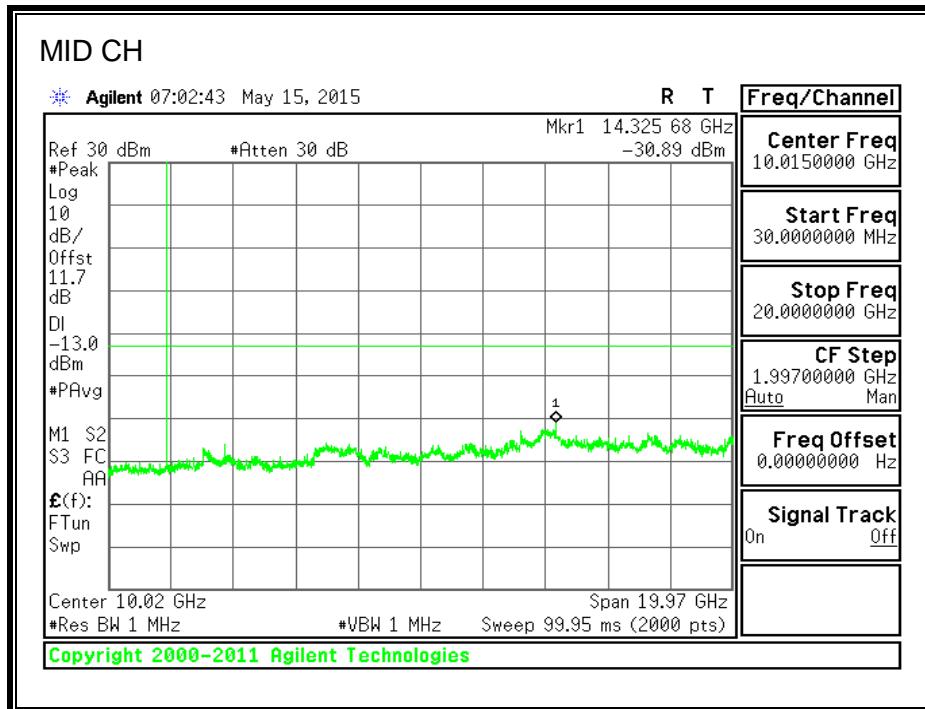
850MHz BAND





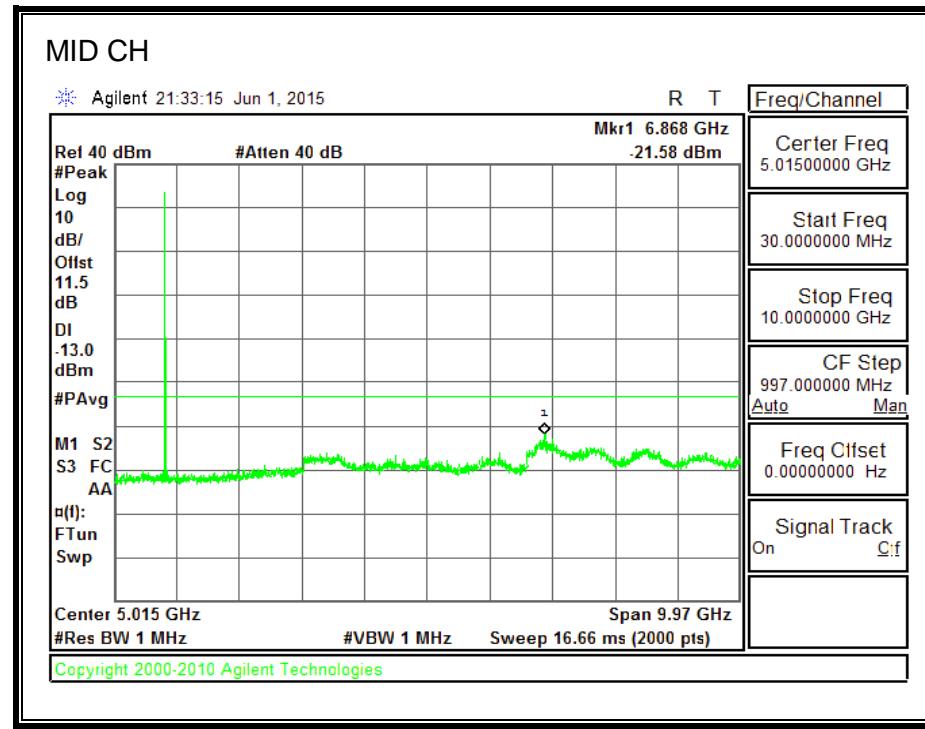
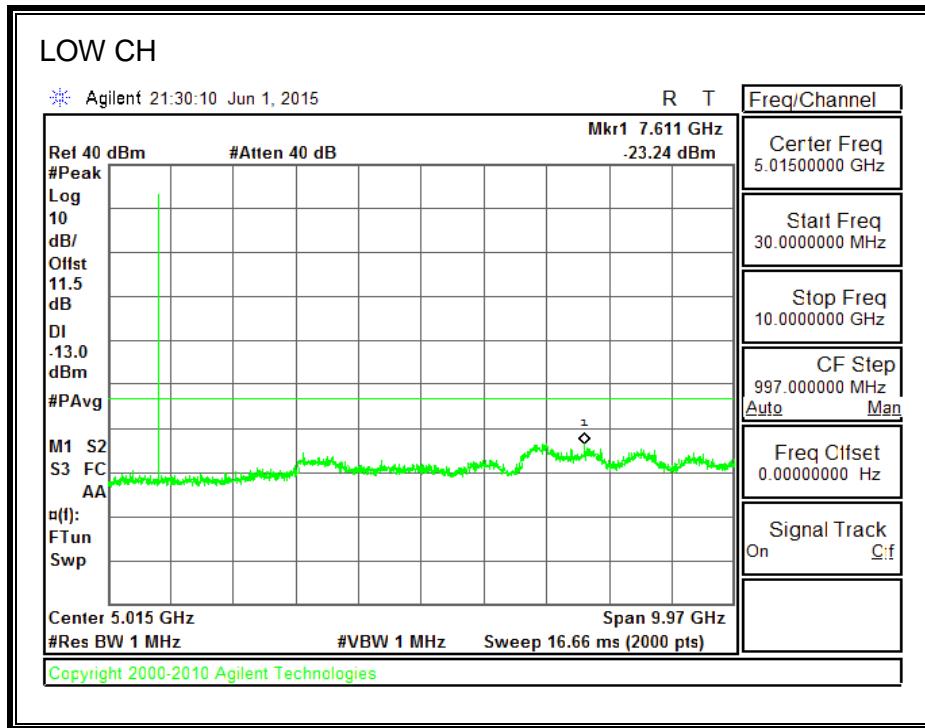
1900MHz BAND

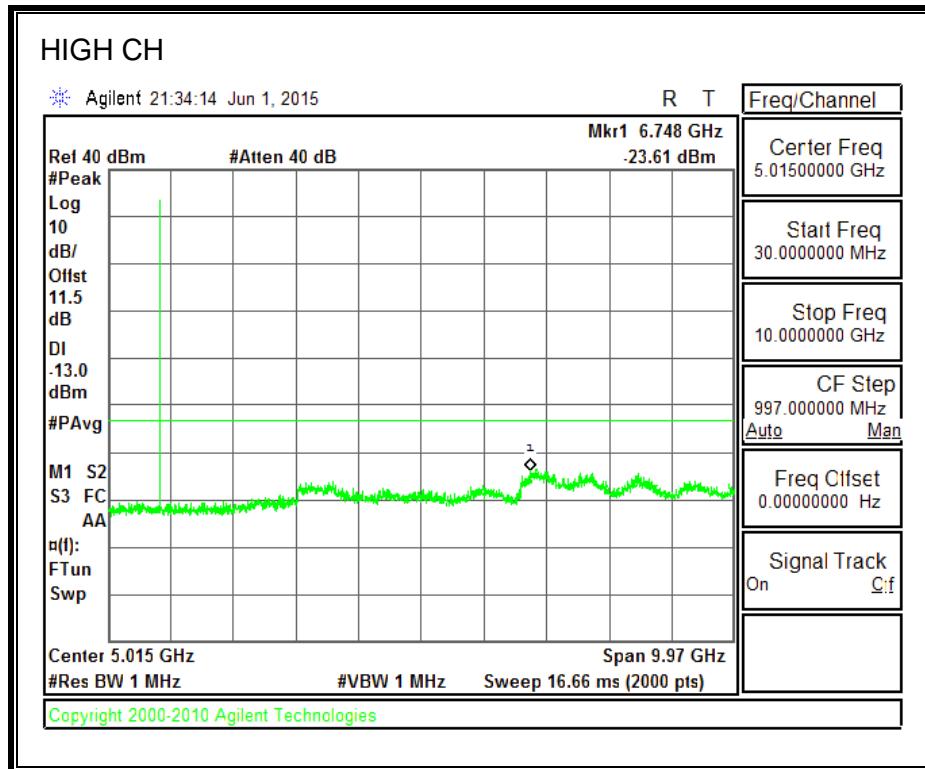


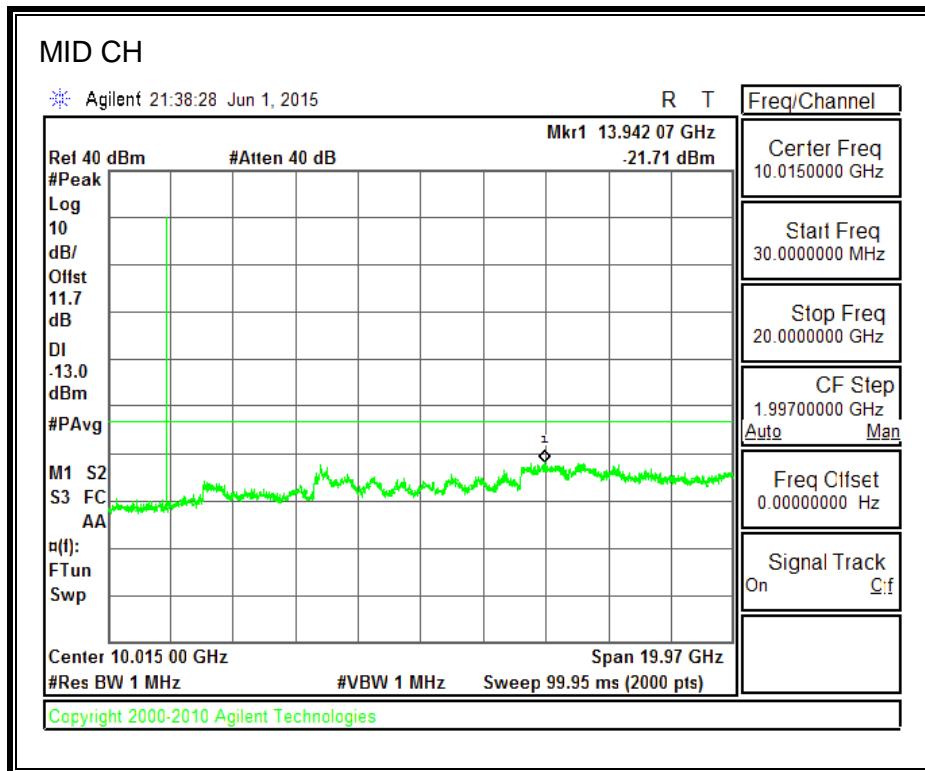
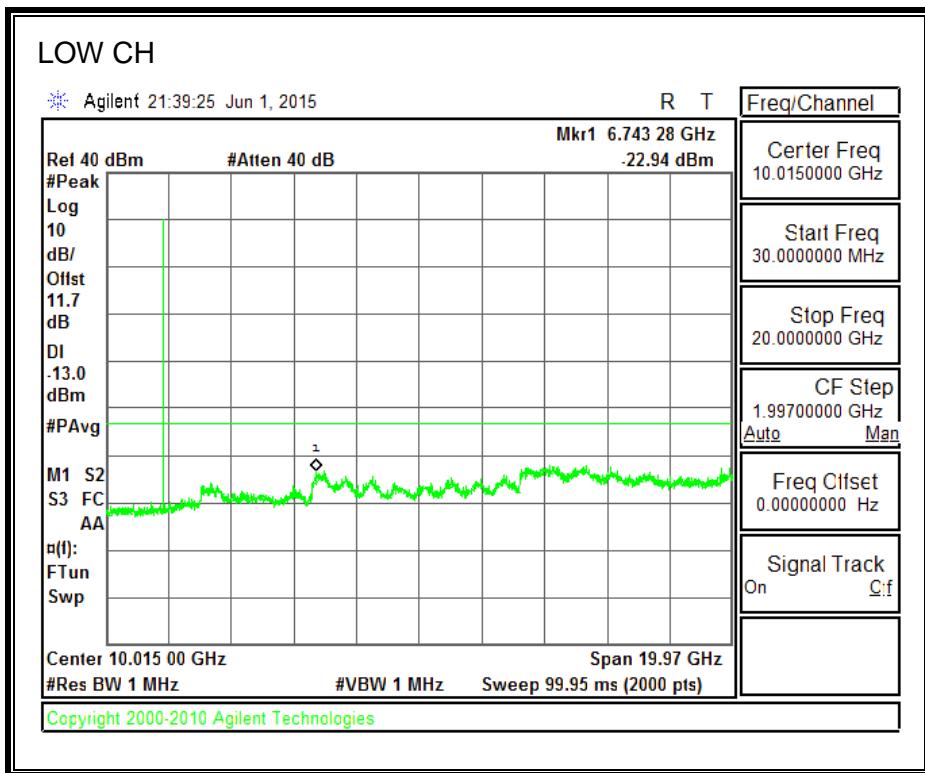


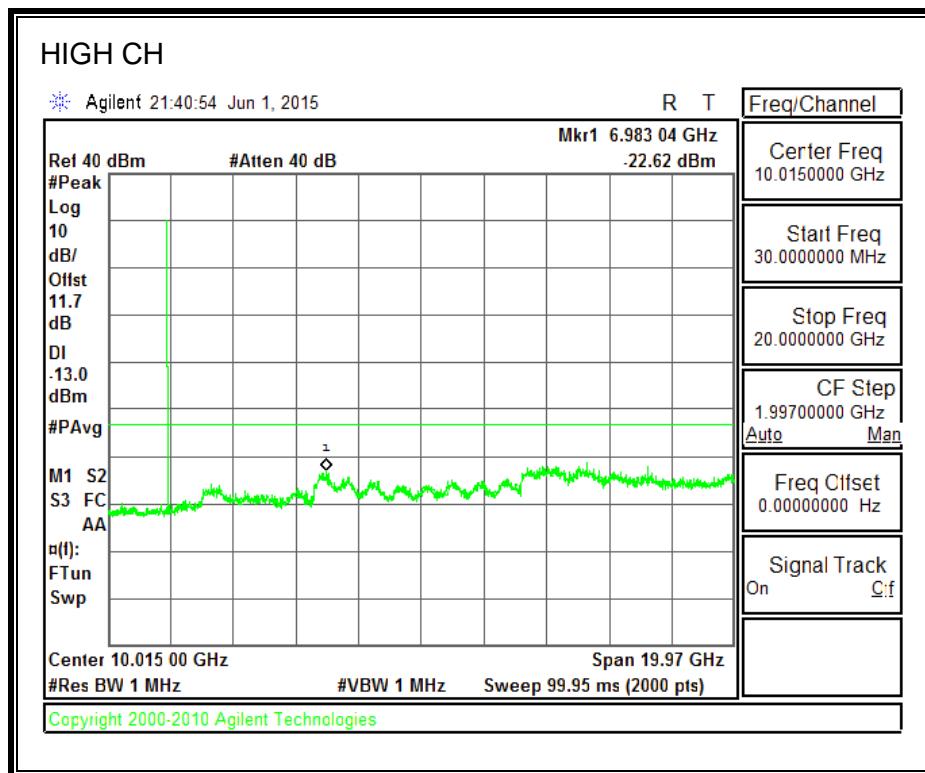
8.6.2. GSM-EGPRS

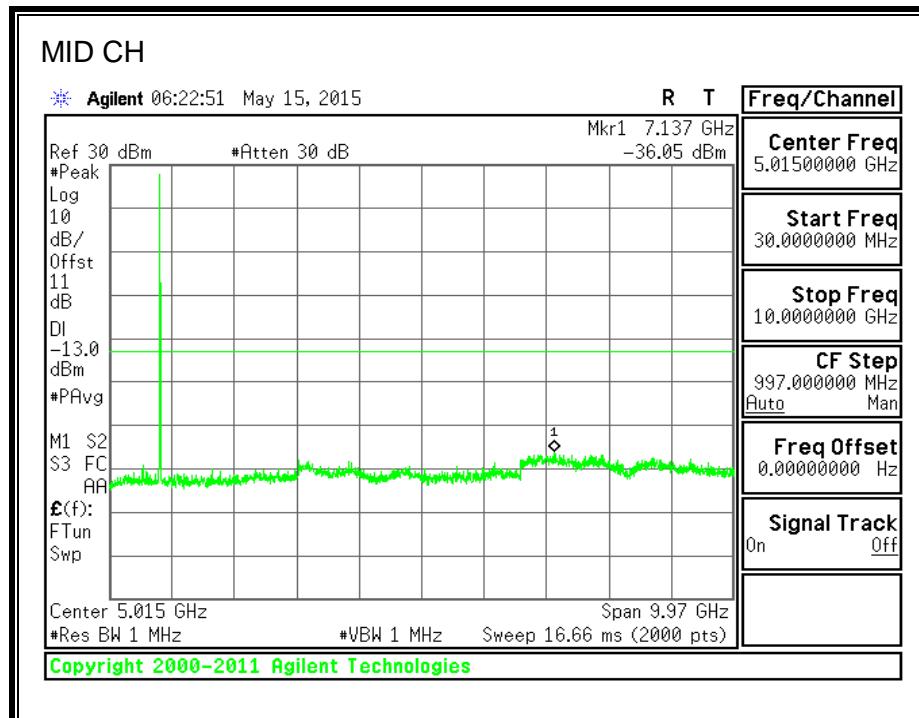
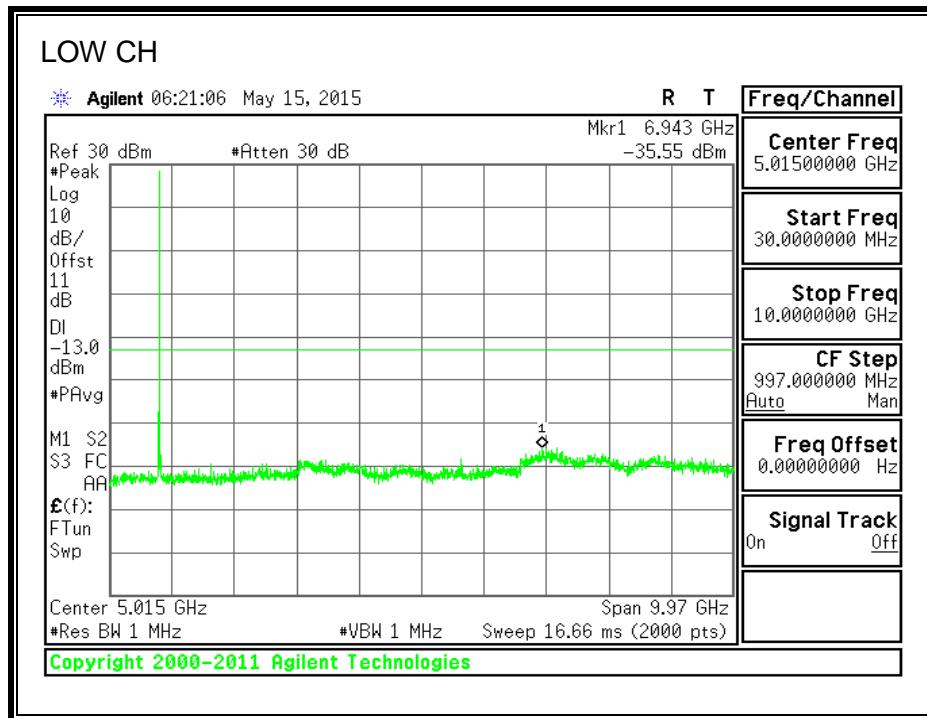
850MHz BAND

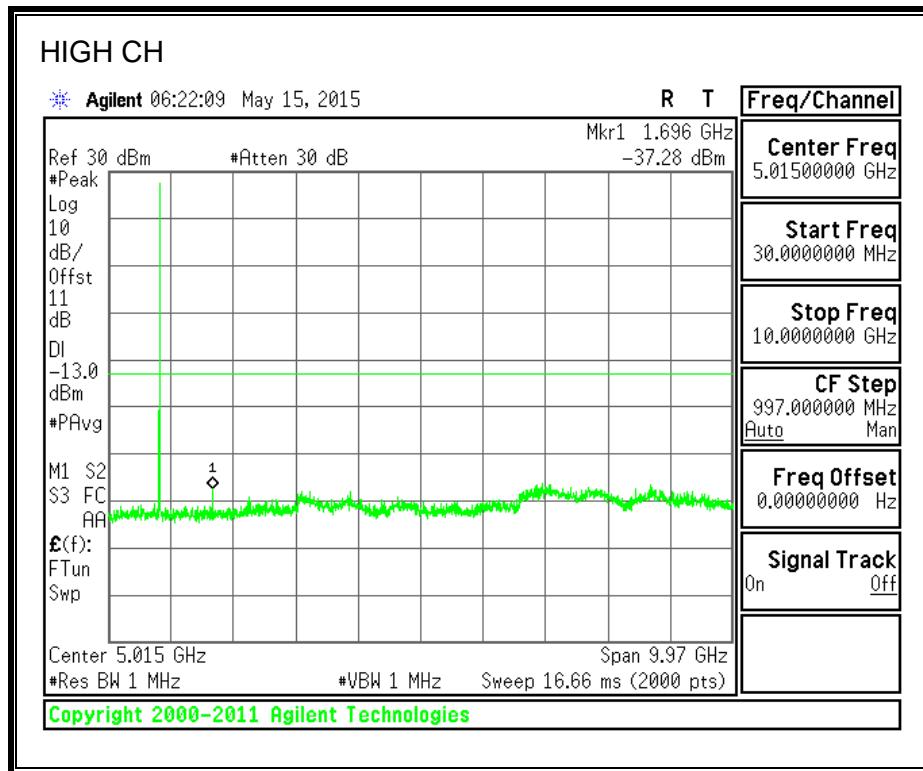


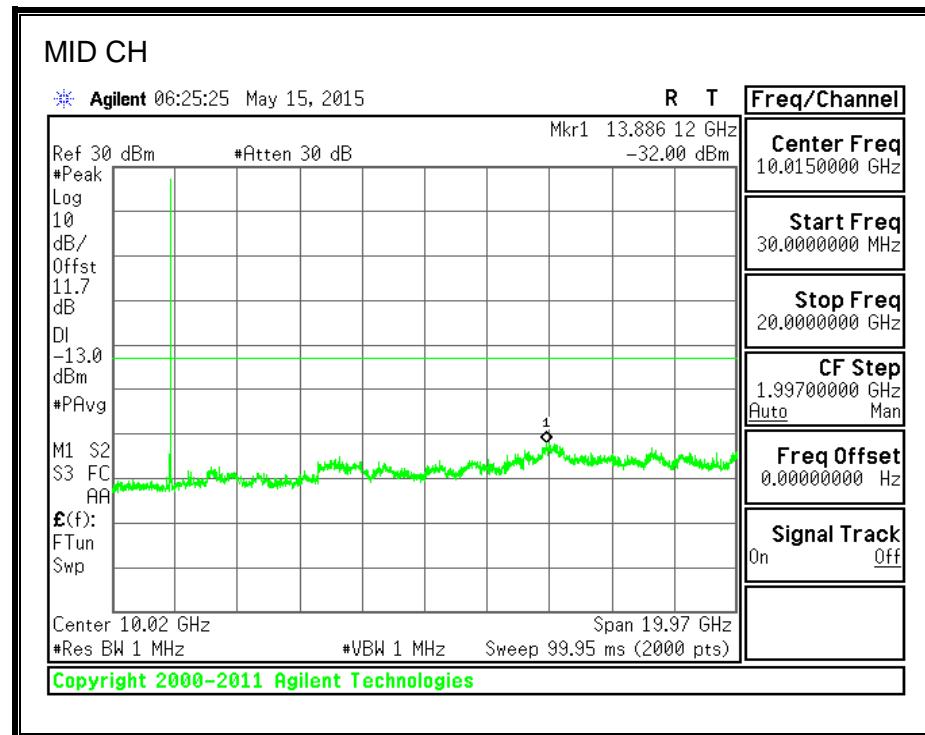
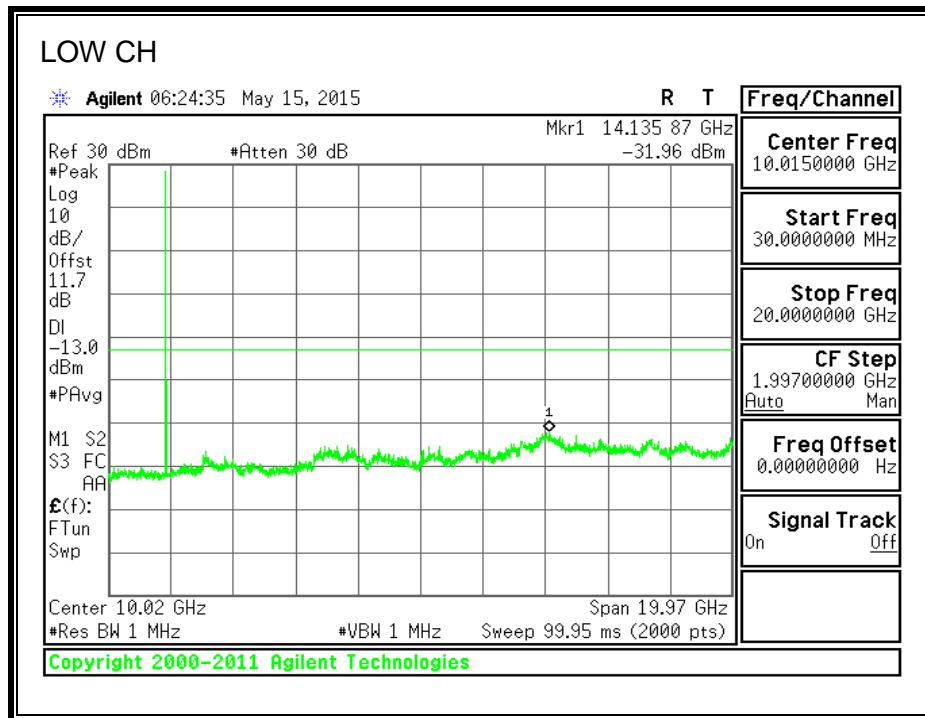


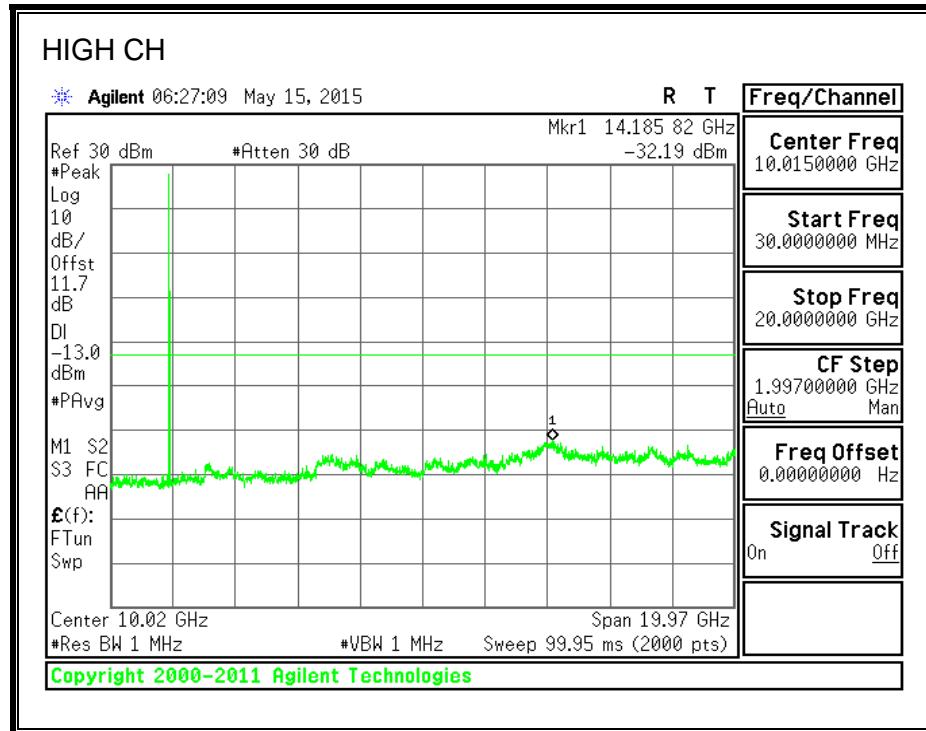
1900MHz BAND

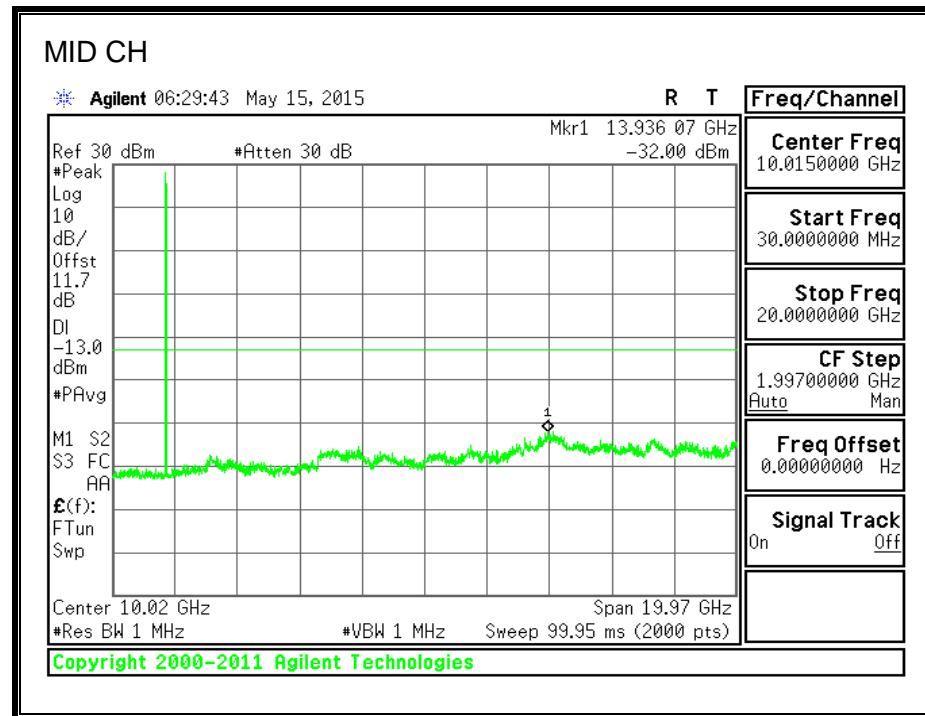
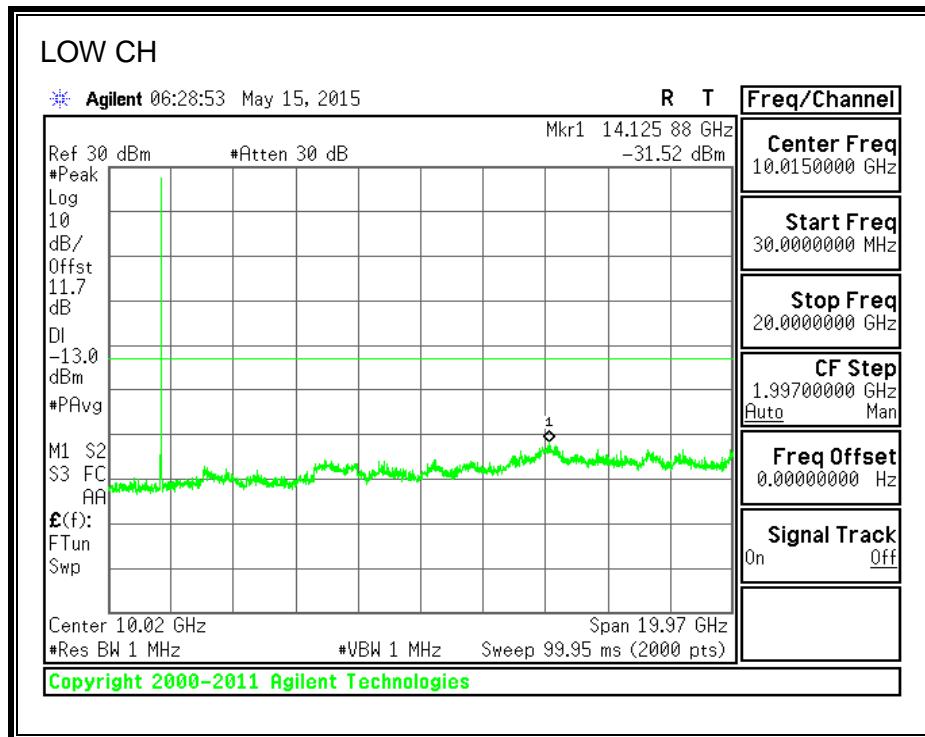


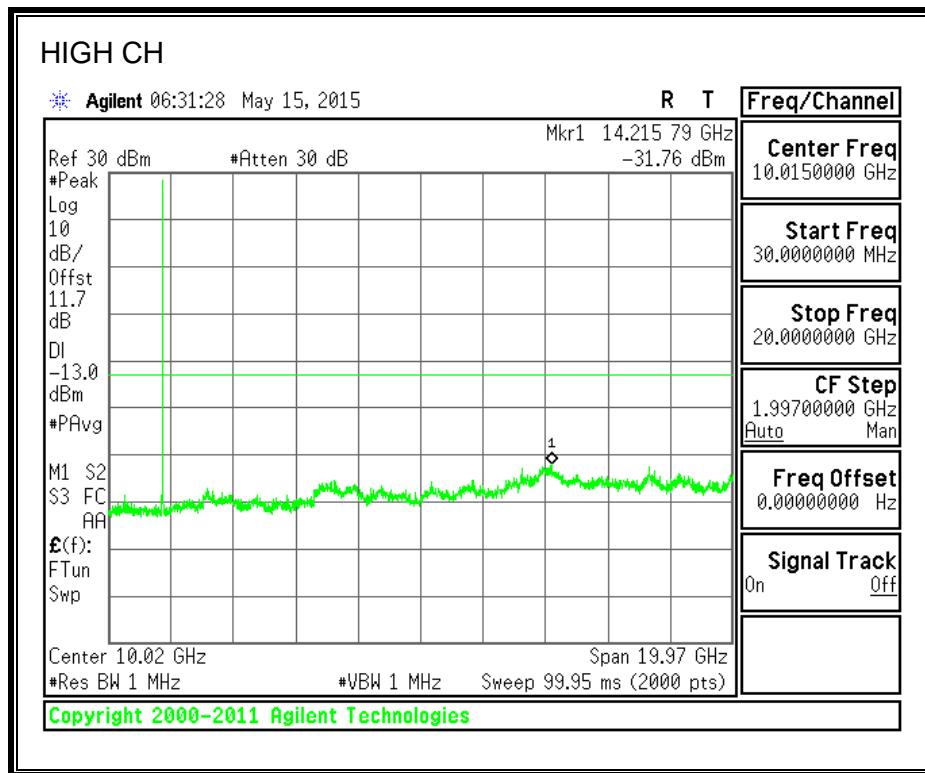
8.6.3. CDMA2000 1xRTT**850MHz BAND**

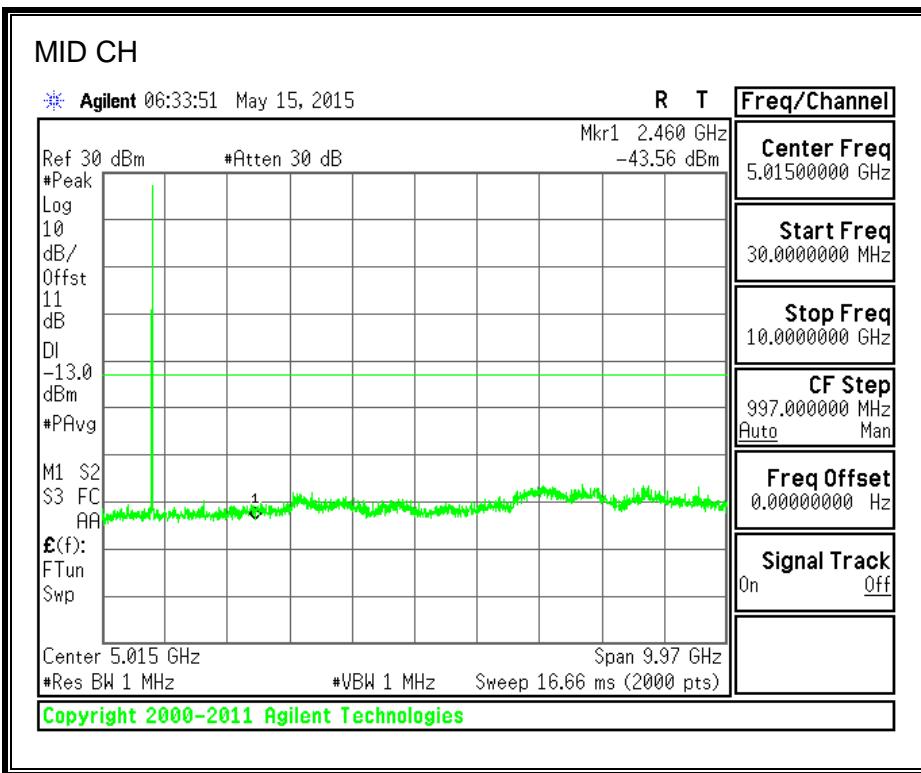
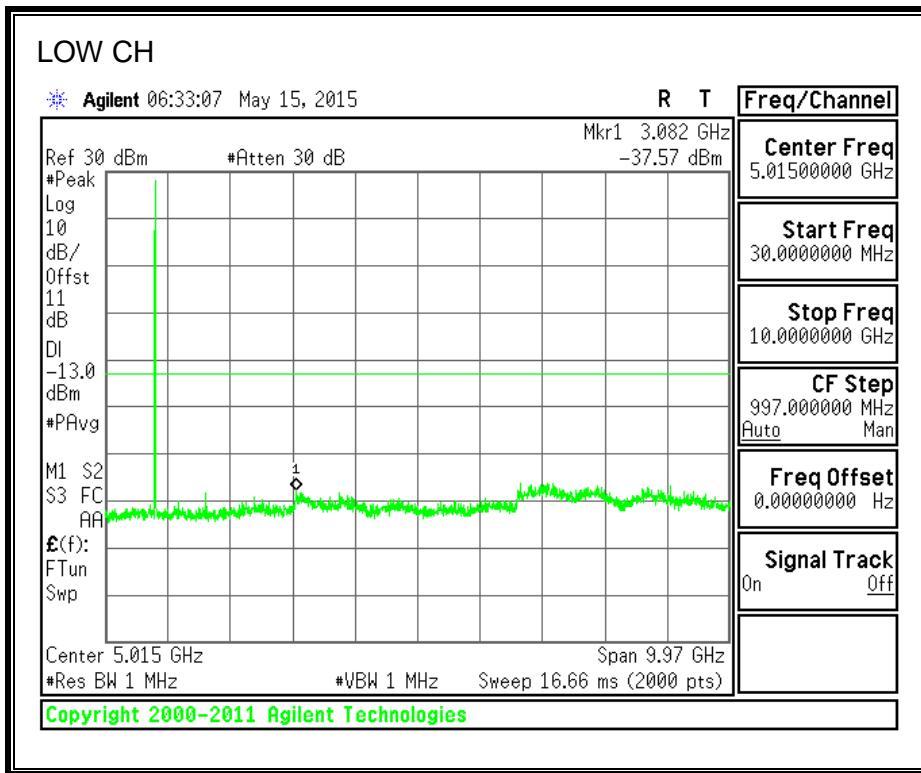


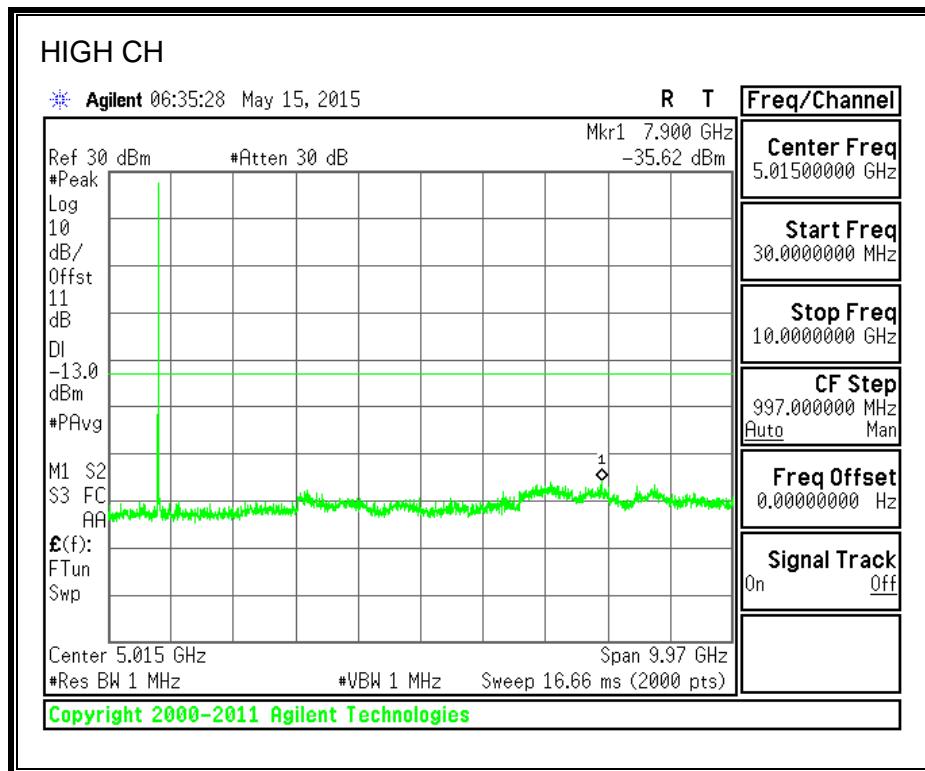
1900MHz BAND

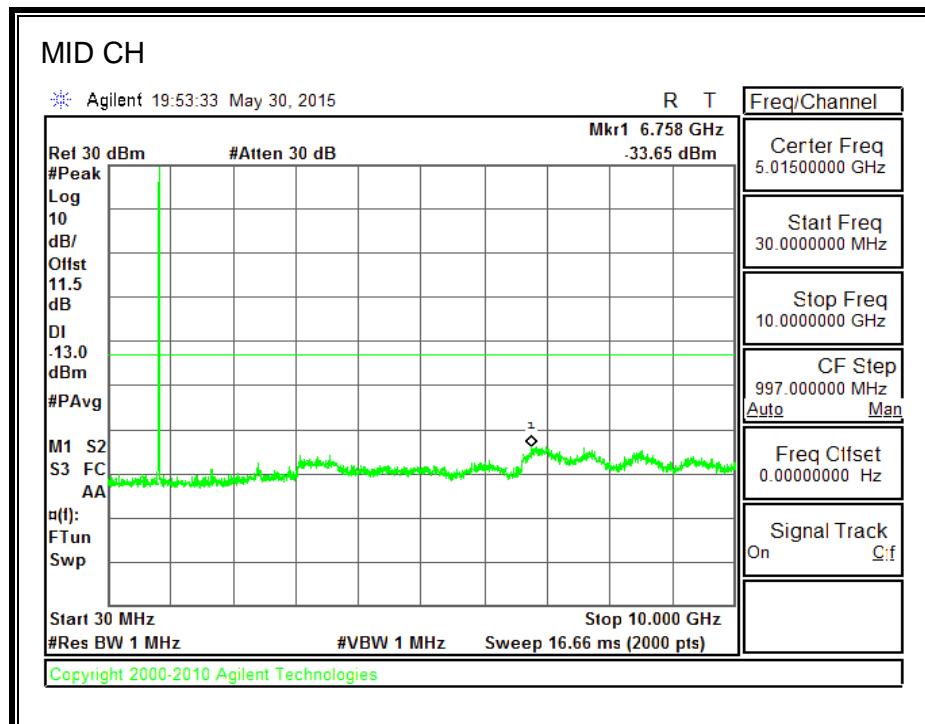
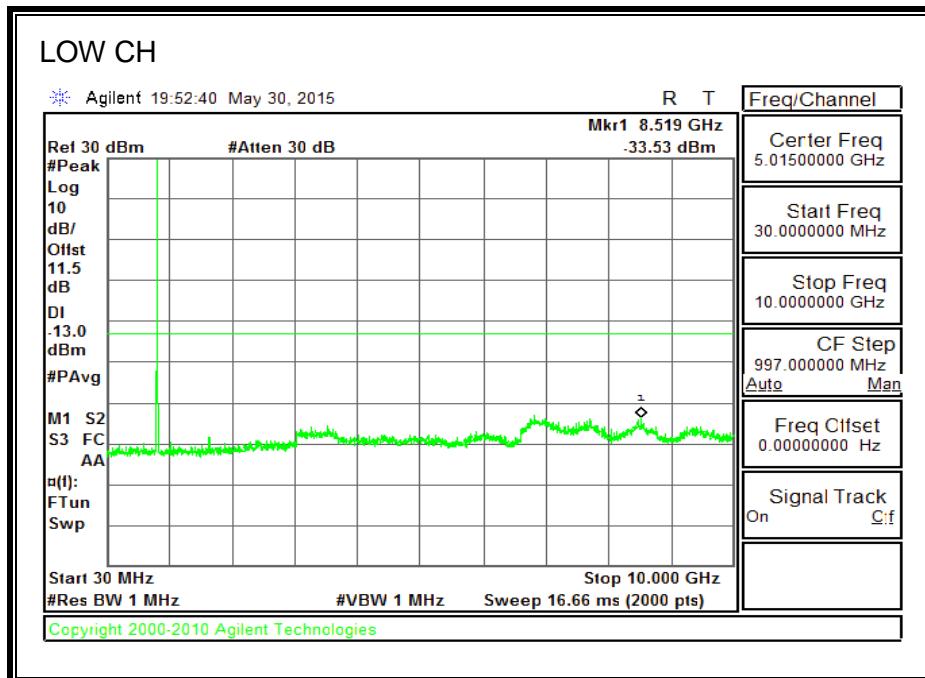


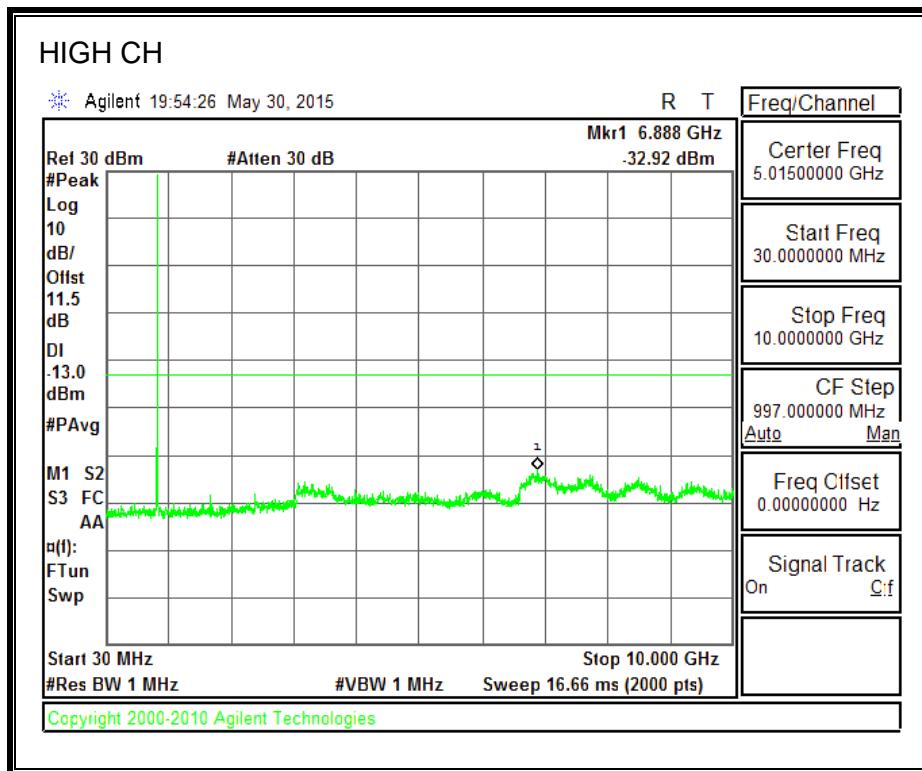
1700MHz BAND

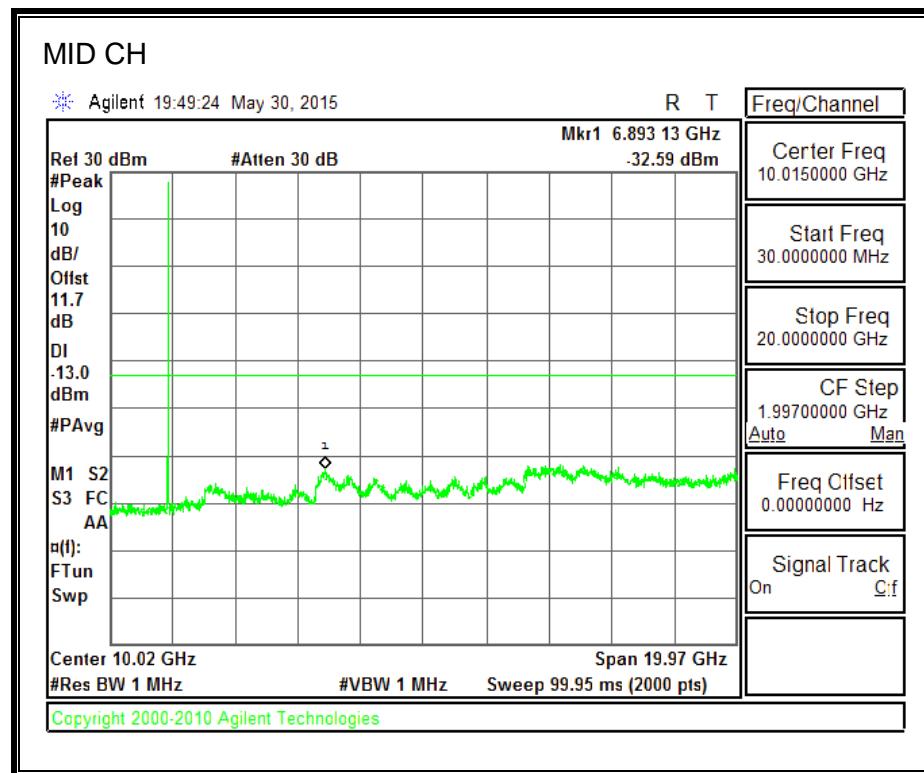
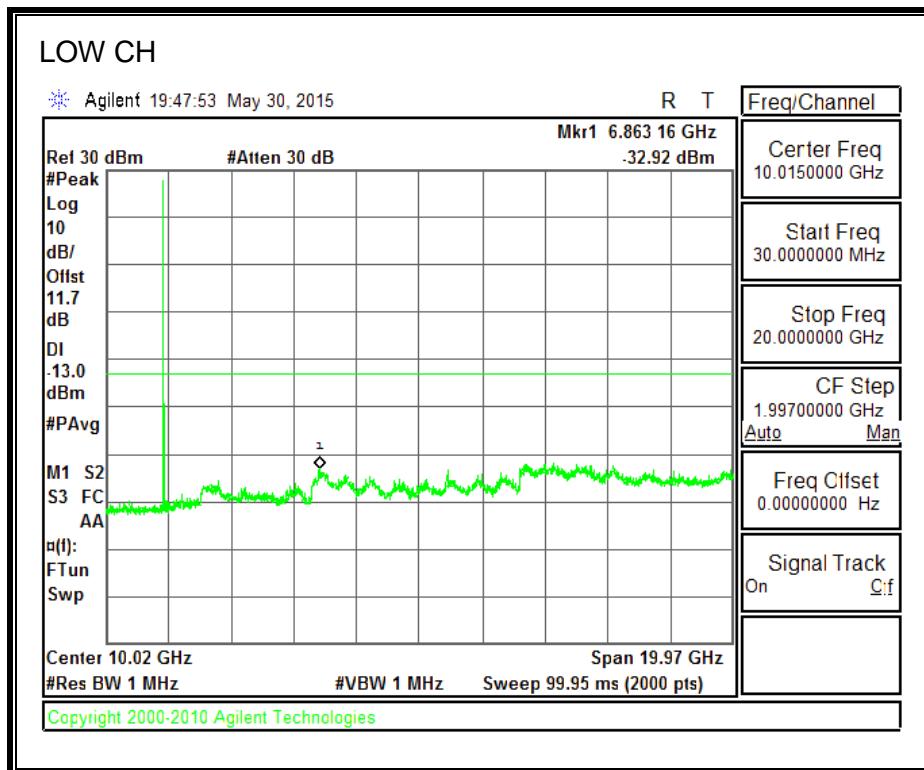


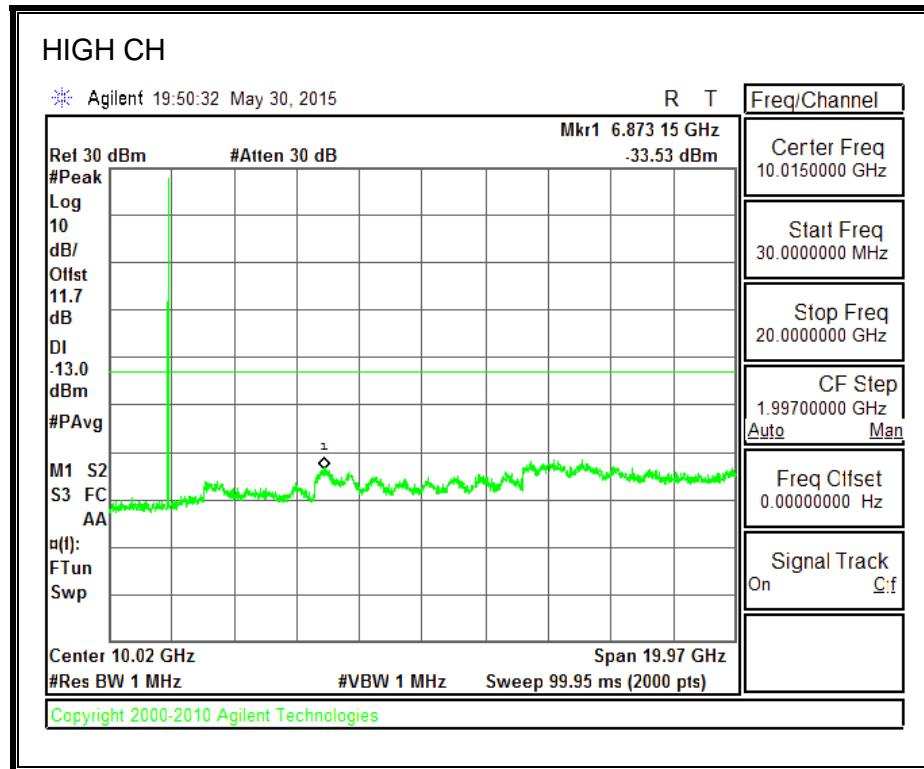
800MHz SECONDARY BAND

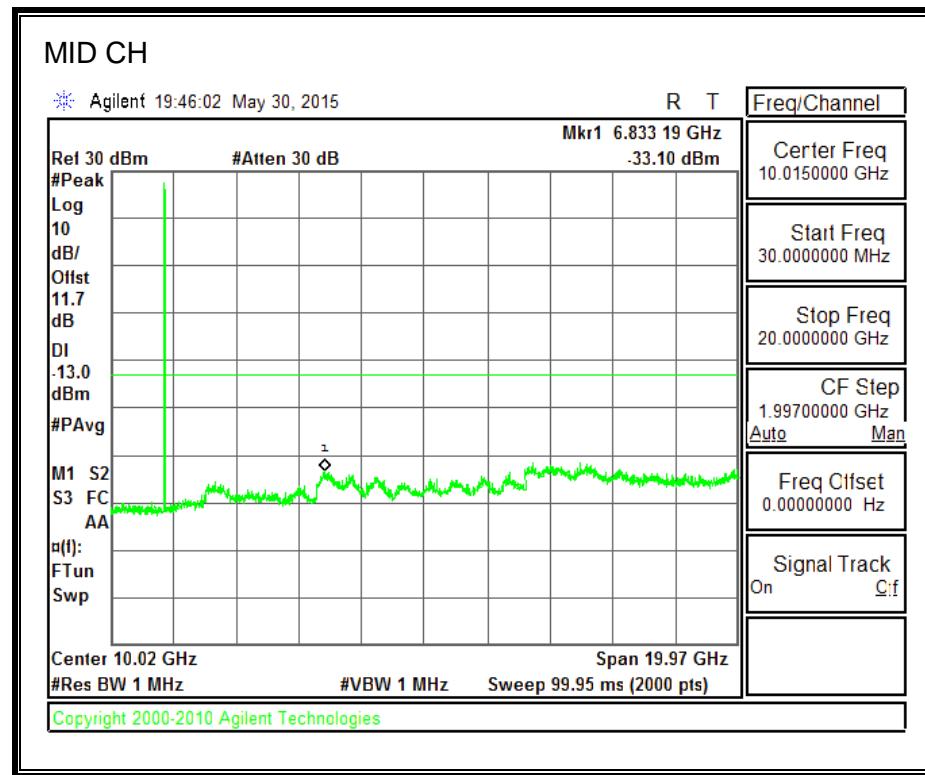
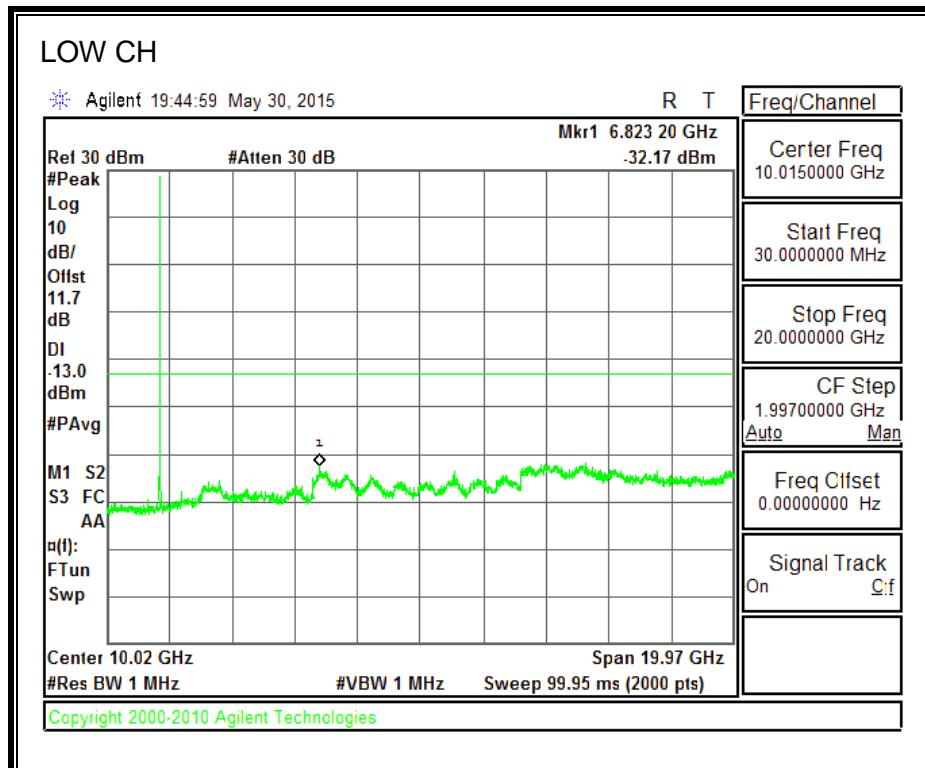


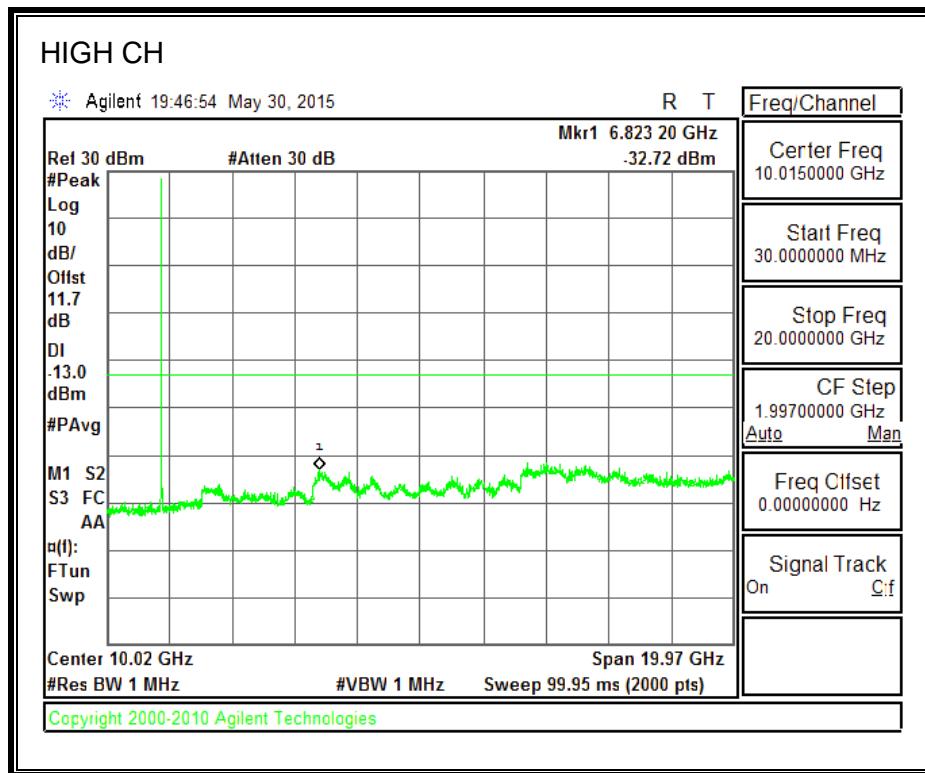
8.6.4. CDMA2000 REV A**850MHz BAND**

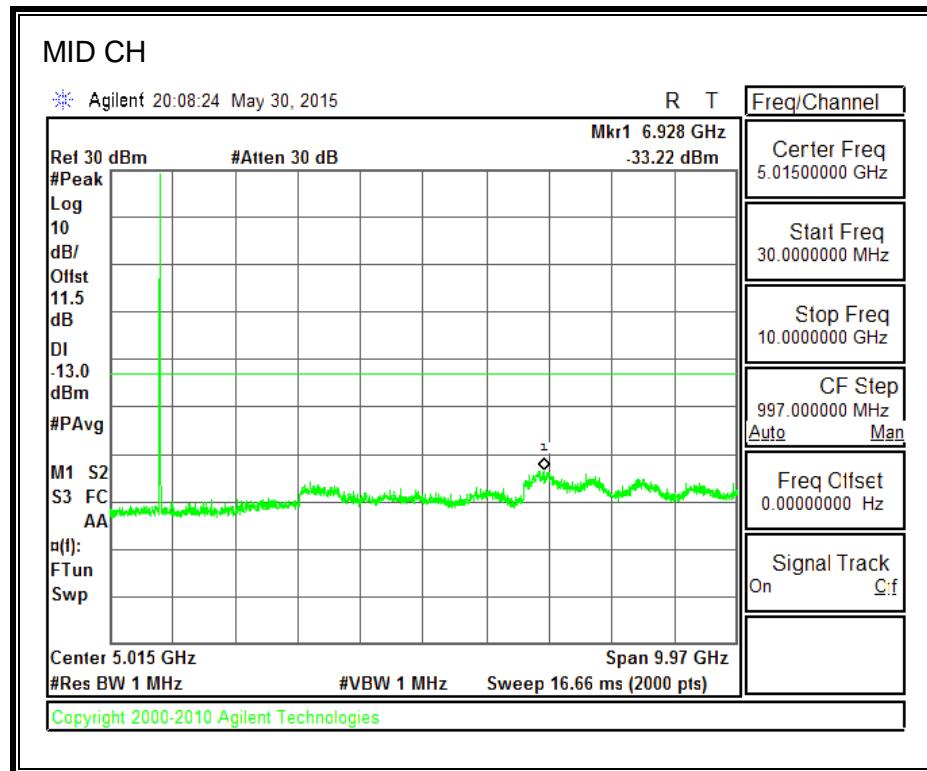
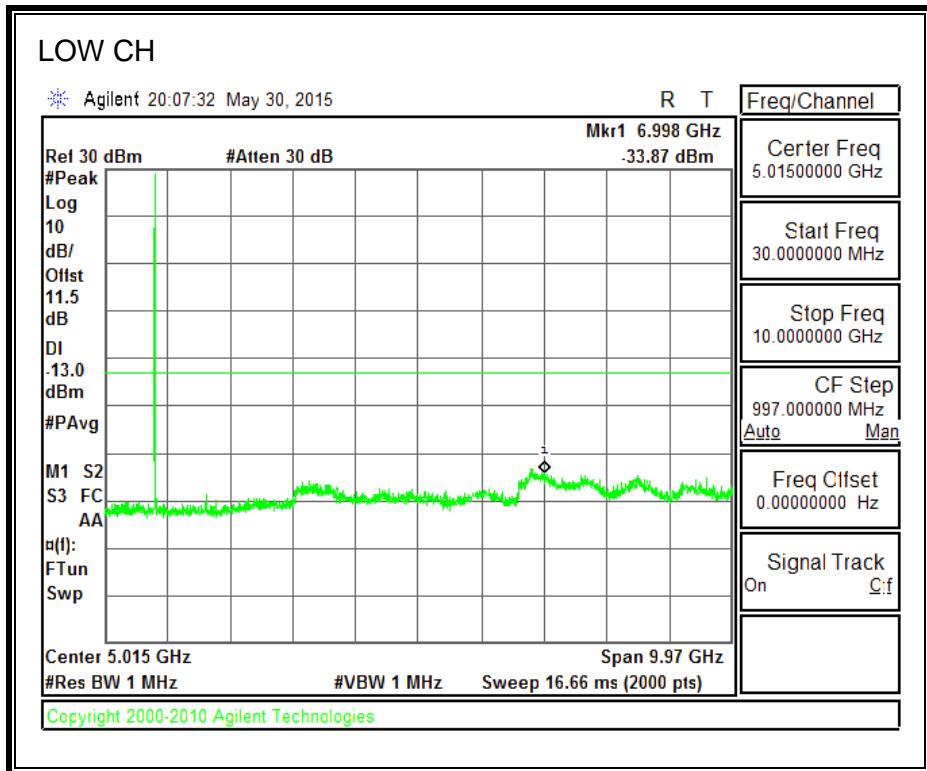


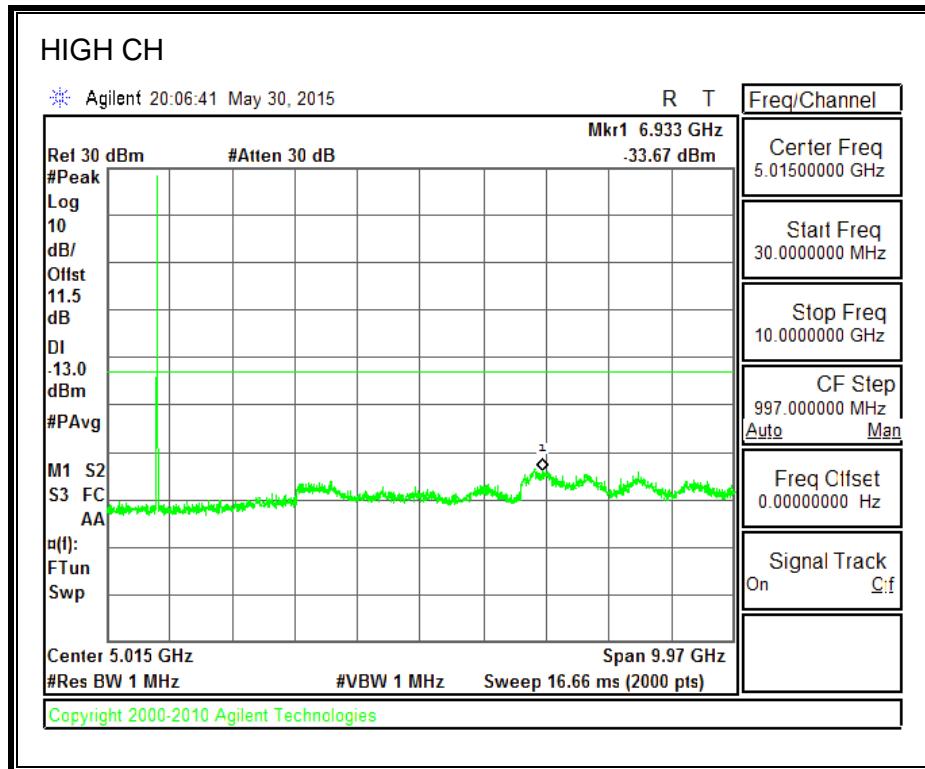
1900MHz BAND



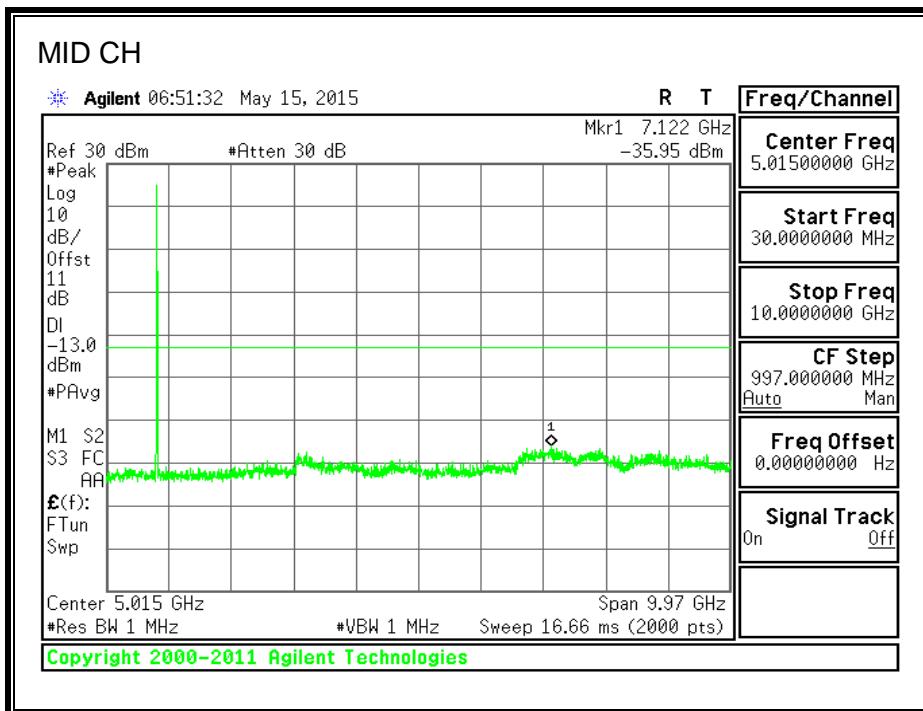
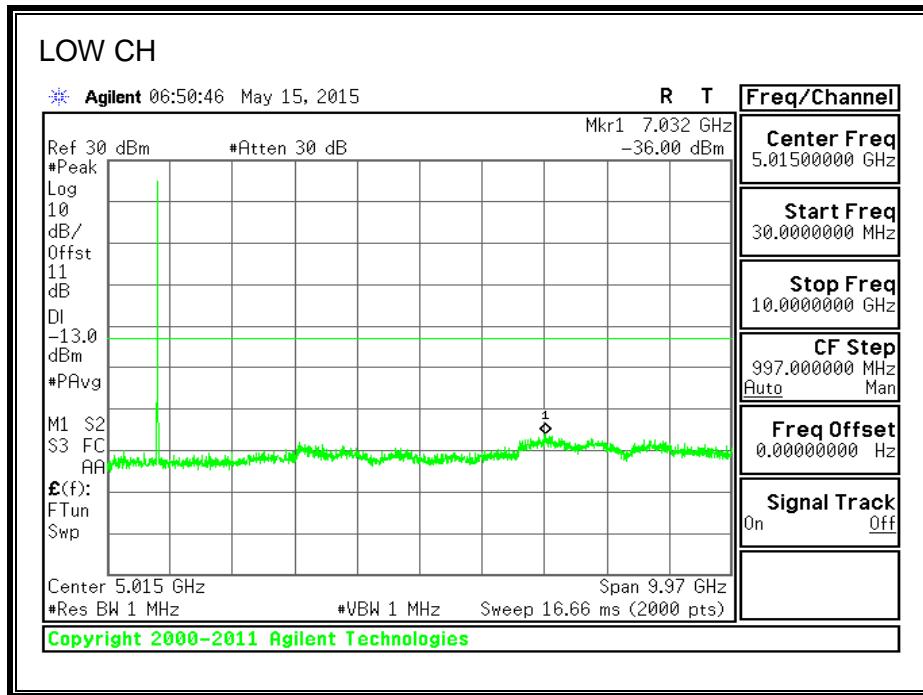
1700MHz BAND

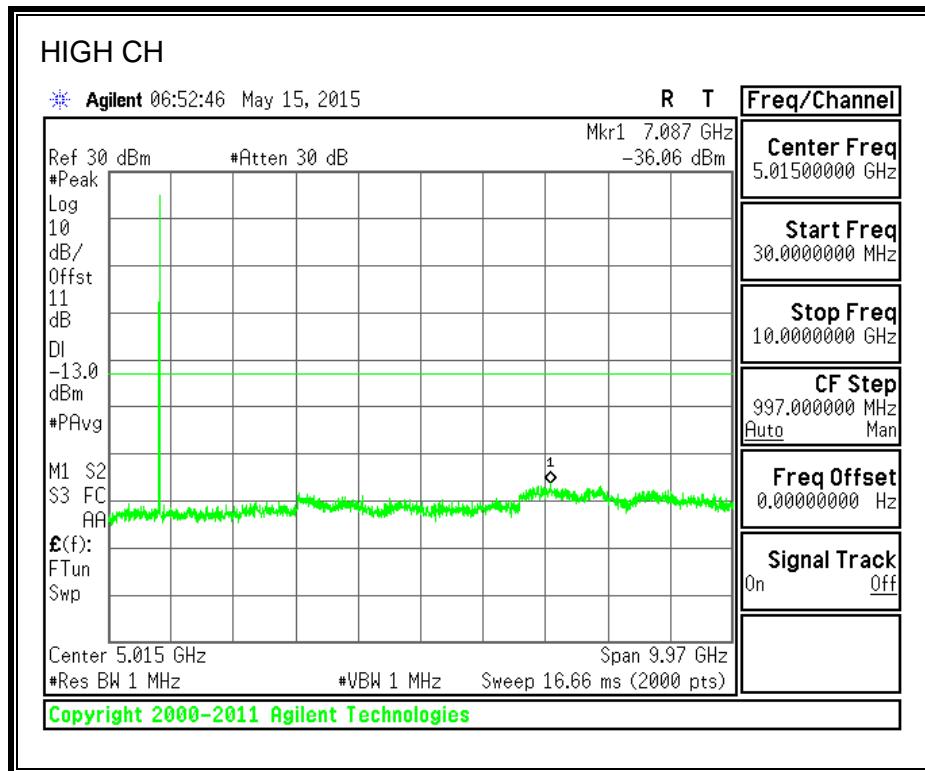


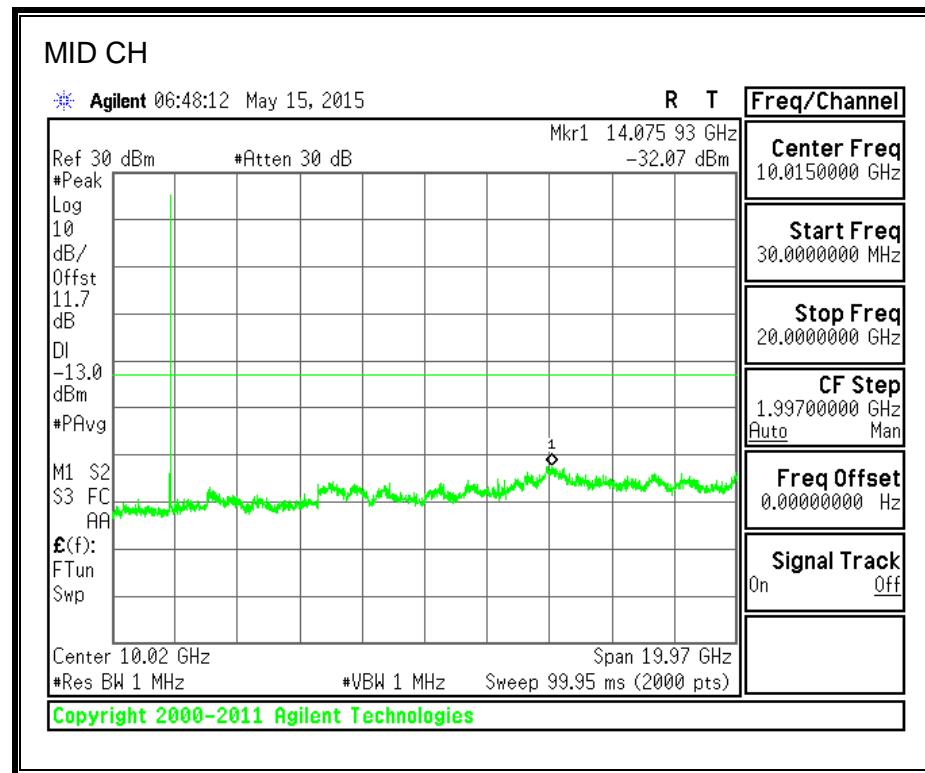
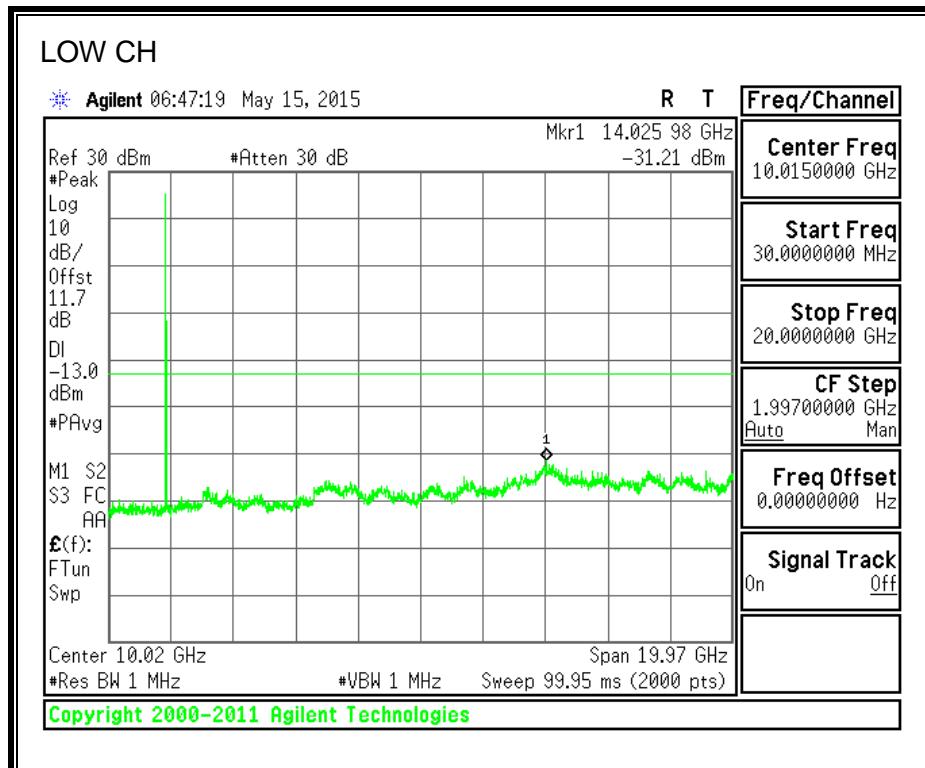
800MHz SECONDARY BAND

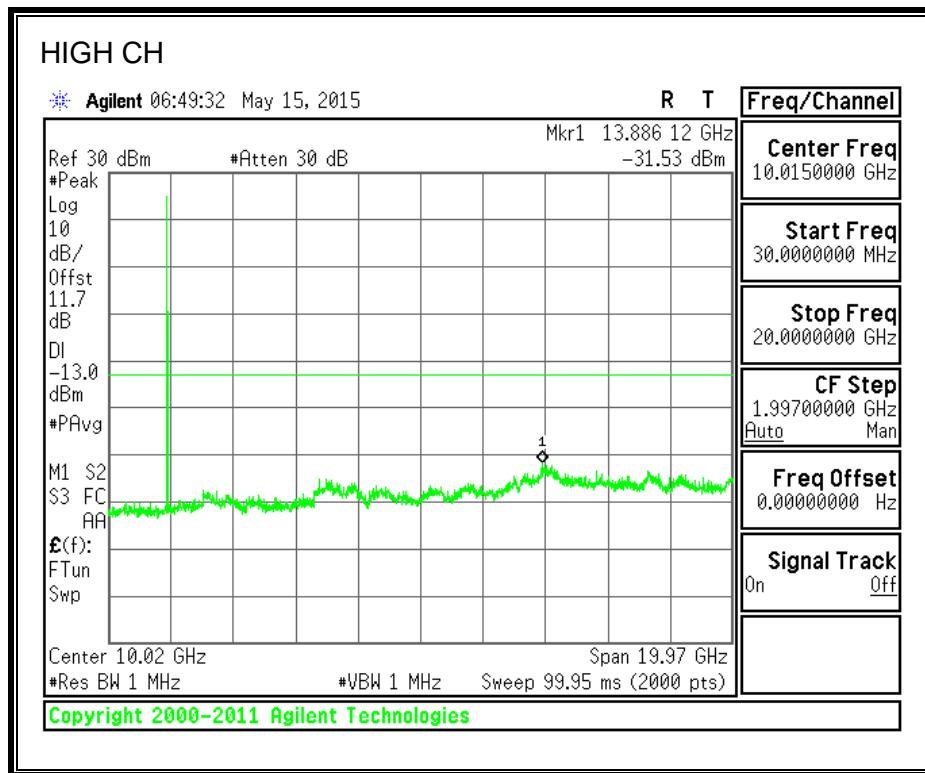


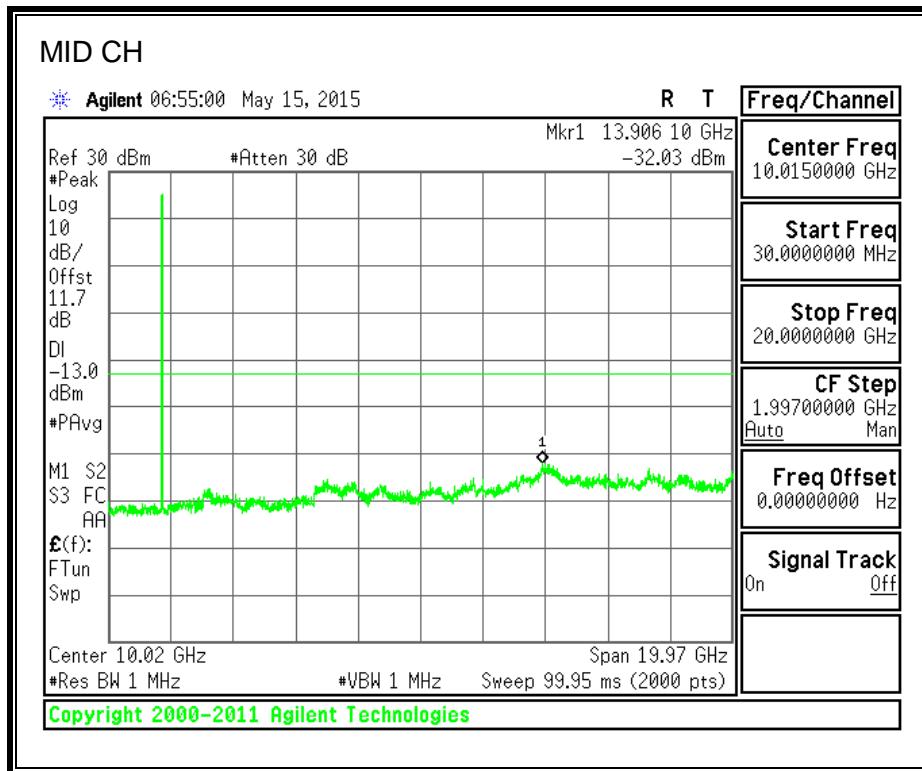
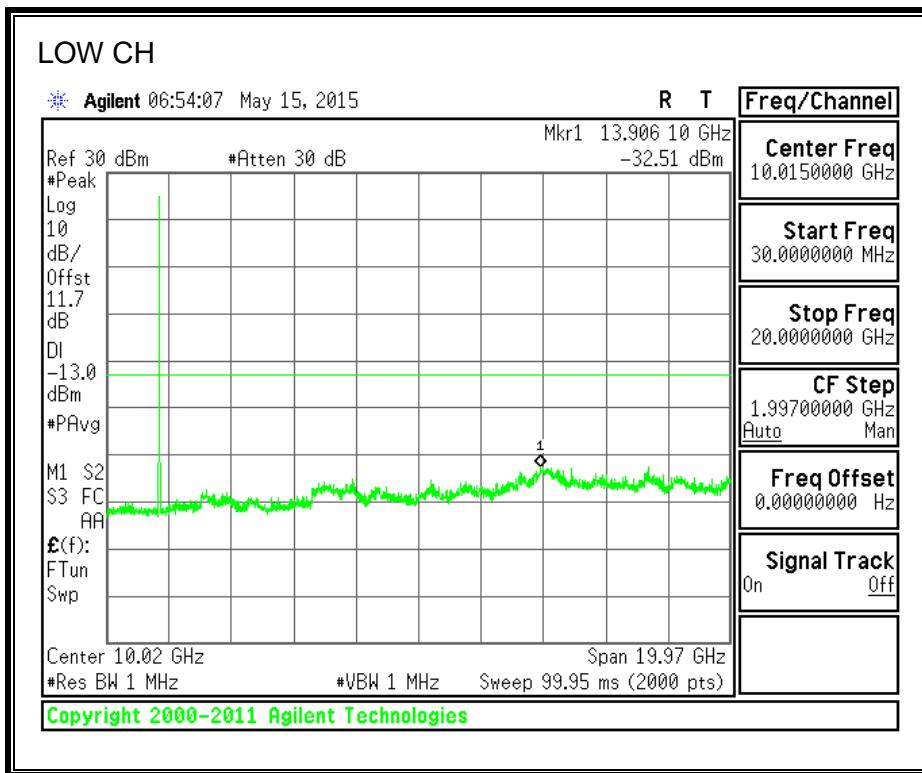
8.6.5. UMTS REL 99

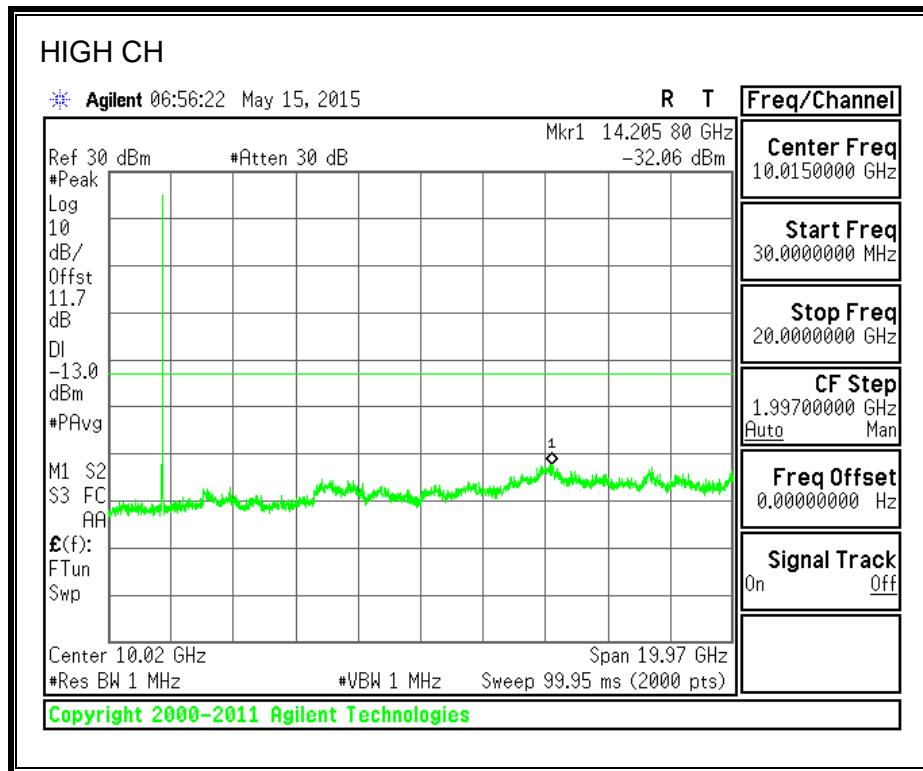
850MHz BAND



1900MHz BAND

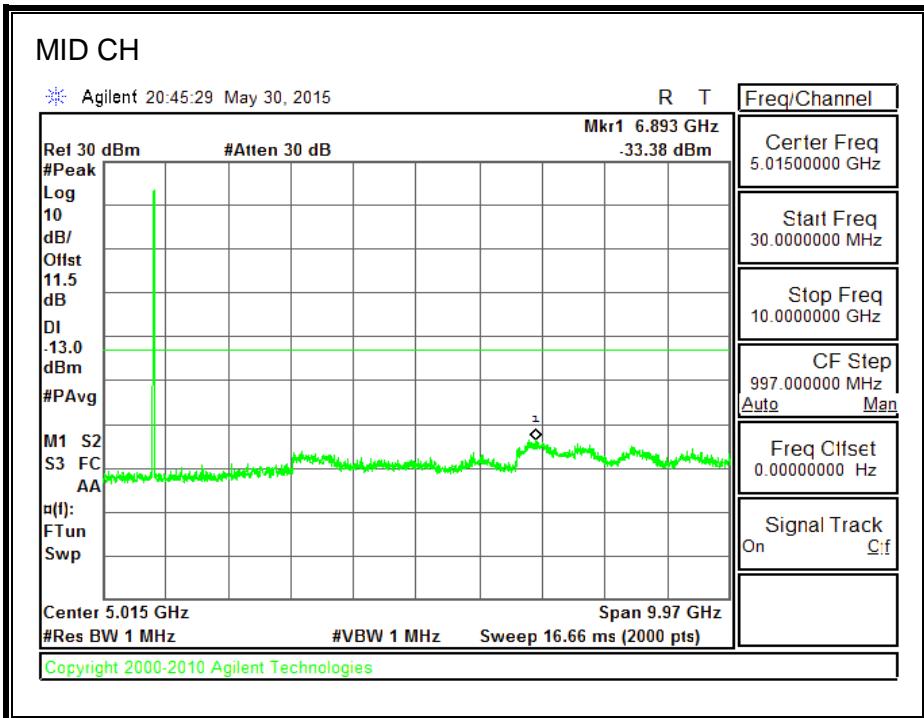
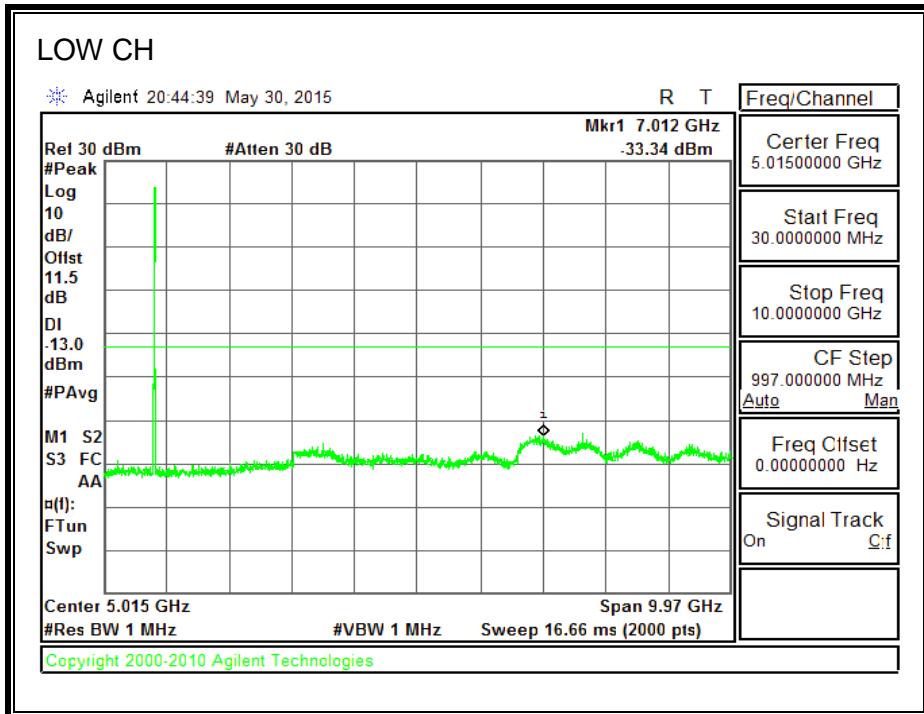


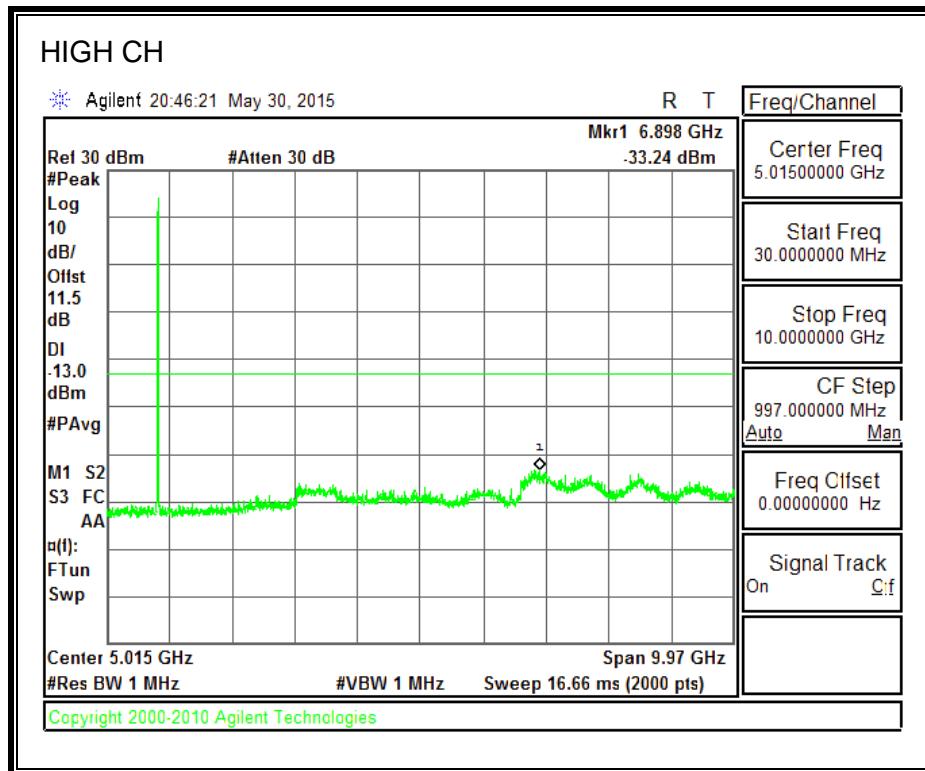
1700MHz BAND

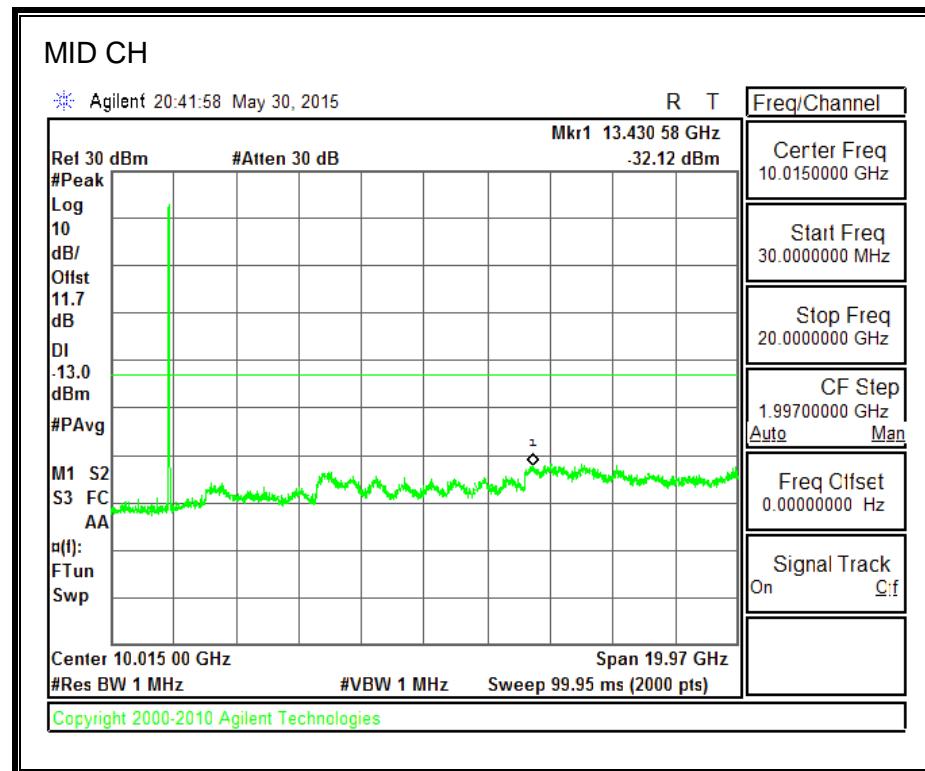
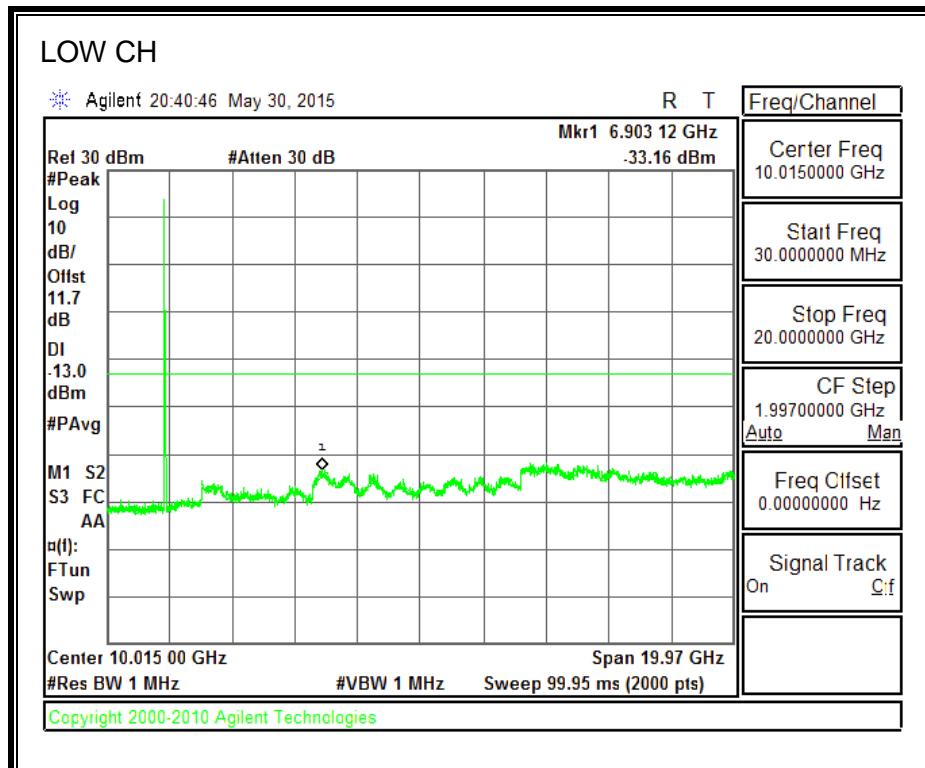


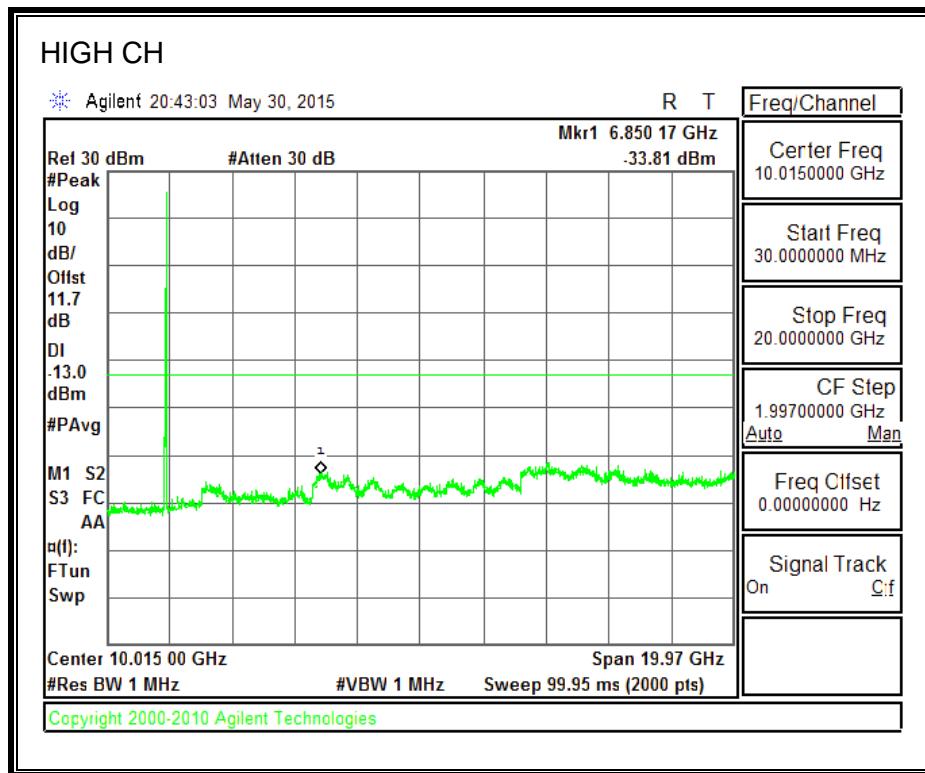
8.6.6. UMTS HSDPA

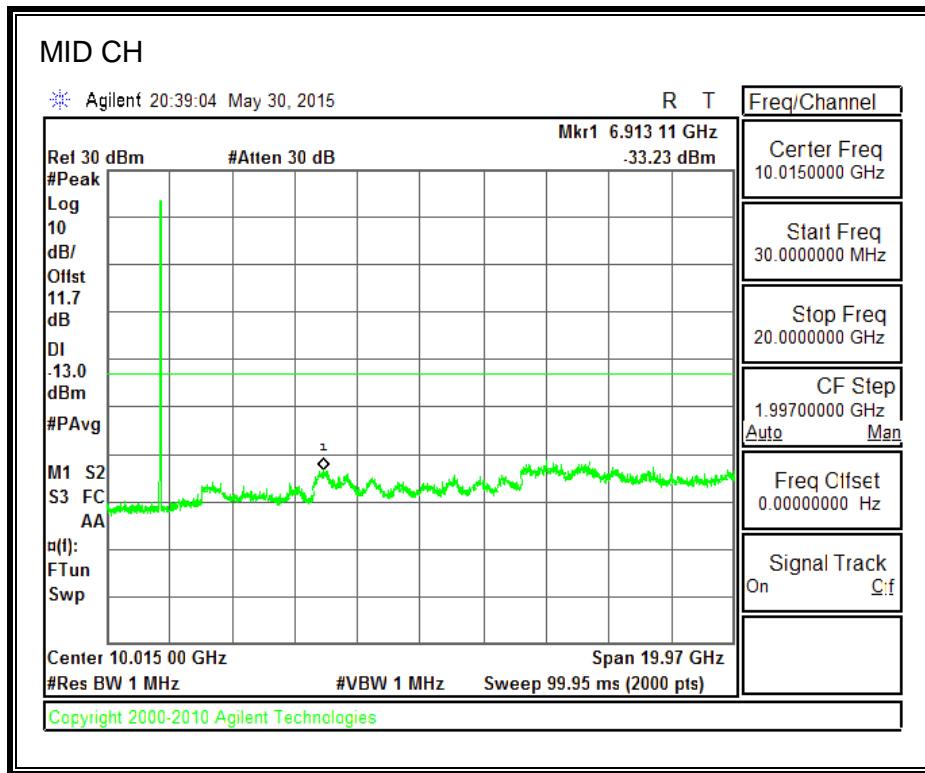
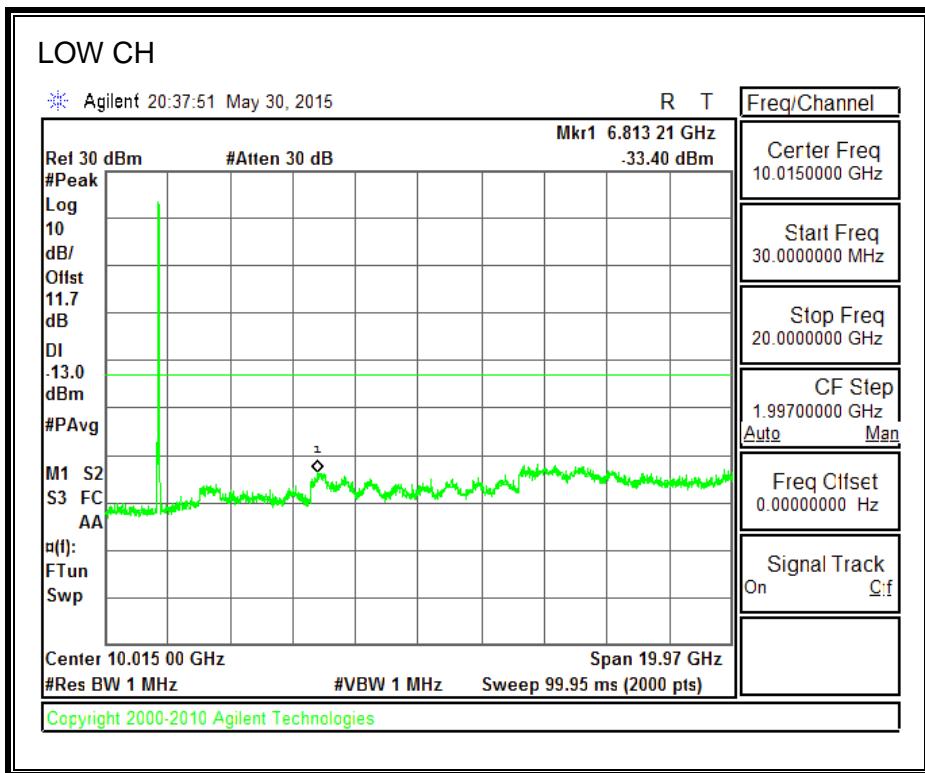
850MHz BAND

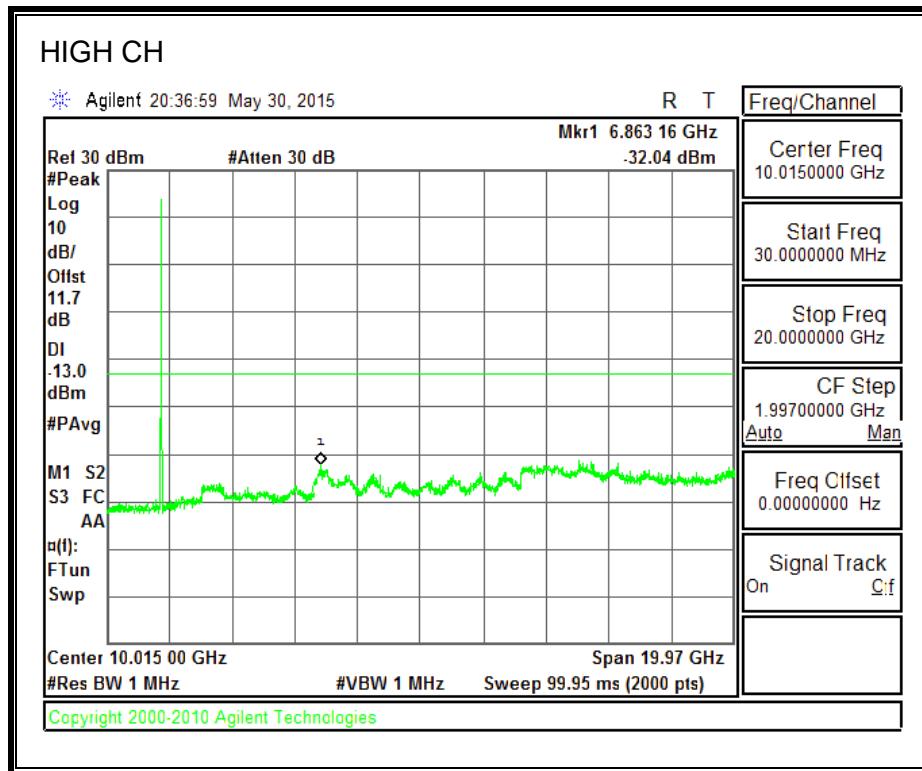




1900MHz BAND



1700MHz BAND



9. FREQUENCY STABILITY

9.1. MODEL: A1634

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 & §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

GPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0204	848.9816		
Extreme (50C)		824.0204	848.9816	28.2	0.03
Extreme (40C)		824.0204	848.9816	24.5	0.03
Extreme (30C)		824.0204	848.9816	19.7	0.02
Extreme (10C)		824.0204	848.9816	20.3	0.02
Extreme (0C)		824.0204	848.9816	17.8	0.02
Extreme (-10C)		824.0204	848.9816	20.3	0.02
Extreme (-20C)		824.0204	848.9816	20.9	0.02
Extreme (-30C)		824.0204	848.9816	17.5	0.02
25C	10%	824.0221	848.9737	27.7	0.03
	-10%	824.0204	848.9816	26.1	0.03
	End Point	824.0204	848.9816	20.4	0.02

EGPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0222	848.9684		
Extreme (50C)		824.0223	848.9684	40.7	0.05
Extreme (40C)		824.0222	848.9684	27.5	0.03
Extreme (30C)		824.0222	848.9684	26.5	0.03
Extreme (10C)		824.0222	848.9684	27.3	0.03
Extreme (0C)		824.0222	848.9684	27.7	0.03
Extreme (-10C)		824.0222	848.9684	31.3	0.04
Extreme (-20C)		824.0222	848.9684	31.6	0.04
Extreme (-30C)		824.0222	848.9684	33.0	0.04
25C	10%	824.0335	848.9725	42.6	0.05
	-10%	824.0223	848.9684	43.5	0.05
	End Point	824.0222	848.9684	39.6	0.05

GPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0309	1909.9657		
Extreme (50C)		1850.0309	1909.9658	37.5	0.02
Extreme (40C)		1850.0309	1909.9658	25.6	0.01
Extreme (30C)		1850.0309	1909.9658	40.5	0.02
Extreme (10C)		1850.0309	1909.9658	35.4	0.02
Extreme (0C)		1850.0309	1909.9658	32.2	0.02
Extreme (-10C)		1850.0309	1909.9658	33.0	0.02
Extreme (-20C)		1850.0309	1909.9658	43.4	0.02
Extreme (-30C)		1850.0309	1909.9658	35.7	0.02
25C	10%	1850.0308	1909.9655	34.0	0.02
	-10%	1850.0309	1909.9658	28.4	0.02
	End Point	1850.0309	1909.9658	25.7	0.01

EGPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0451	1909.9397		
Extreme (50C)		1850.0452	1909.9398	38.8	0.02
Extreme (40C)		1850.0452	1909.9398	32.5	0.02
Extreme (30C)		1850.0452	1909.9398	31.9	0.02
Extreme (10C)		1850.0452	1909.9398	53.4	0.03
Extreme (0C)		1850.0452	1909.9398	51.2	0.03
Extreme (-10C)		1850.0452	1909.9398	60.4	0.03
Extreme (-20C)		1850.0452	1909.9398	41.6	0.02
Extreme (-30C)		1850.0452	1909.9398	43.2	0.02
25C	10%	1850.0452	1909.9398	33.6	0.02
	-10%	1850.0452	1909.9398	28.0	0.01
	End Point	1850.0452	1909.9398	24.4	0.01

CDMA 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0084	848.9999	-5.6	-0.01
Extreme (50C)		824.0084	848.9999		
Extreme (40C)		824.0084	848.9999		
Extreme (30C)		824.0084	848.9999		
Extreme (10C)		824.0084	848.9999		
Extreme (0C)		824.0084	848.9999		
Extreme (-10C)		824.0084	848.9999		
Extreme (-20C)		824.0084	848.9999		
Extreme (-30C)		824.0084	848.9999		
25C	10%	824.0084	848.9999	-4.5	-0.01
	-10%	824.0084	848.9999	-2.4	0.00
	End Point	824.0084	848.9999	-2.6	0.00

CDMA 1x RTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.5534	1909.4428	-8.6	0.00
Extreme (50C)		1850.5533	1909.4428		
Extreme (40C)		1850.5533	1909.4428		
Extreme (30C)		1850.5533	1909.4428		
Extreme (10C)		1850.5533	1909.4428		
Extreme (0C)		1850.5534	1909.4428		
Extreme (-10C)		1850.5534	1909.4428		
Extreme (-20C)		1850.5534	1909.4428		
Extreme (-30C)		1850.5534	1909.4428		
25C	10%	1850.5534	1909.4428	2.4	0.00
	-10%	1850.5534	1909.4428	-2.5	0.00
	End Point	1850.5534	1909.4428	-4.1	0.00

CDMA 1xRTT BC15

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.5571	1754.4417	-6.3	0.00
Extreme (50C)		1710.5570	1754.4417		
Extreme (40C)		1710.5570	1754.4417		
Extreme (30C)		1710.5570	1754.4417		
Extreme (10C)		1710.5570	1754.4417		
Extreme (0C)		1710.5570	1754.4417		
Extreme (-10C)		1710.5571	1754.4417		
Extreme (-20C)		1710.5571	1754.4417		
Extreme (-30C)		1710.5571	1754.4417		
25C	10%	1710.5571	1754.4417	5.0	0.00
	-10%	1710.5571	1754.4417	2.7	0.00
	End Point	1710.5571	1754.4417	-3.2	0.00

CDMA 1xRTT BC10

Limit		816.35	823.65	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	816.5582	823.4419	-5.3	-0.01
Extreme (50C)		816.5582	823.4419		
Extreme (40C)		816.5582	823.4419		
Extreme (30C)		816.5582	823.4419		
Extreme (10C)		816.5582	823.4419		
Extreme (0C)		816.5582	823.4419		
Extreme (-10C)		816.5582	823.4419		
Extreme (-20C)		816.5582	823.4419		
Extreme (-30C)		816.5582	823.4419		
25C	10%	816.5582	823.4419	-3.7	0.00
	-10%	816.5582	823.4419	-3.3	0.00
	End Point	816.5582	823.4419	-2.4	0.00

UMTS REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.1283	848.8772	-1.0	0.00
Extreme (50C)		824.1283	848.8772		
Extreme (40C)		824.1283	848.8772		
Extreme (30C)		824.1283	848.8772		
Extreme (10C)		824.1283	848.8772		
Extreme (0C)		824.1283	848.8772		
Extreme (-10C)		824.1283	848.8772		
Extreme (-20C)		824.1283	848.8772		
Extreme (-30C)		824.1283	848.8772		
25C	10%	824.1283	848.8772	0.9	0.00
	-10%	824.1283	848.8772	0.9	0.00
	End Point	824.1283	848.8772	-1.0	0.00

UMTS REL99 BAND 2

Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage				
Normal (25C)	Normal	1850.1273	1909.8669	-1.9	0.00
Extreme (50C)		1850.1273	1909.8669		
Extreme (40C)		1850.1273	1909.8669		
Extreme (30C)		1850.1273	1909.8669		
Extreme (10C)		1850.1273	1909.8669		
Extreme (0C)		1850.1273	1909.8669		
Extreme (-10C)		1850.1273	1909.8669		
Extreme (-20C)		1850.1273	1909.8669		
Extreme (-30C)		1850.1273	1909.8669		
25C	10%	1850.1273	1909.8669	-1.2	0.00
	-10%	1850.1273	1909.8669	-1.2	0.00
	End Point	1850.1273	1909.8669	-1.6	0.00

UMTS REL99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.1309	1754.8765		
Extreme (50C)		1710.1309	1754.8765	7.6	0.00
Extreme (40C)		1710.1309	1754.8765	19.3	0.01
Extreme (30C)		1710.1309	1754.8765	7.2	0.00
Extreme (10C)		1710.1309	1754.8765	-2.5	0.00
Extreme (0C)		1710.1309	1754.8765	-0.9	0.00
Extreme (-10C)		1710.1309	1754.8765	-0.5	0.00
Extreme (-20C)		1710.1309	1754.8765	-0.9	0.00
Extreme (-30C)		1710.1309	1754.8765	-1.7	0.00
25C	10%	1710.1309	1754.8765	7.6	0.00
	-10%	1710.1309	1754.8765	13.0	0.01
	End Point	1710.1309	1754.8765	13.6	0.01

9.2. MODEL: A1687

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54.and §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 & §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

GPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0204	848.9816	25.7	0.03
Extreme (50C)		824.0204	848.9816		0.03
Extreme (40C)		824.0204	848.9816		0.03
Extreme (30C)		824.0204	848.9816		0.02
Extreme (10C)		824.0204	848.9816		0.02
Extreme (0C)		824.0204	848.9816		0.02
Extreme (-10C)		824.0204	848.9816		0.02
Extreme (-20C)		824.0204	848.9816		0.02
Extreme (-30C)		824.0204	848.9816		0.02
25C	10%	824.0221	848.9737	26.1	0.03
	-10%	824.0204	848.9816	24.5	0.03
	End Point	824.0204	848.9816	18.8	0.02

EGPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0222	848.9684	39.2	0.05
Extreme (50C)		824.0222	848.9684		0.05
Extreme (40C)		824.0222	848.9684		0.03
Extreme (30C)		824.0222	848.9684		0.03
Extreme (10C)		824.0222	848.9684		0.03
Extreme (0C)		824.0222	848.9684		0.03
Extreme (-10C)		824.0222	848.9684		0.04
Extreme (-20C)		824.0222	848.9684		0.04
Extreme (-30C)		824.0222	848.9684		0.04
25C	10%	824.0335	848.9725	40.4	0.05
	-10%	824.0223	848.9684	41.3	0.05
	End Point	824.0222	848.9684	37.4	0.04

GPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0309	1909.9657		
Extreme (50C)		1850.0309	1909.9658	35.2	0.02
Extreme (40C)		1850.0309	1909.9658	23.3	0.01
Extreme (30C)		1850.0309	1909.9658	38.2	0.02
Extreme (10C)		1850.0309	1909.9658	33.1	0.02
Extreme (0C)		1850.0309	1909.9658	29.9	0.02
Extreme (-10C)		1850.0309	1909.9658	30.7	0.02
Extreme (-20C)		1850.0309	1909.9658	41.1	0.02
Extreme (-30C)		1850.0309	1909.9658	33.4	0.02
25C	10%	1850.0308	1909.9655	31.7	0.02
	-10%	1850.0309	1909.9658	26.1	0.01
	End Point	1850.0309	1909.9658	23.4	0.01

EGPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0451	1909.9397		
Extreme (50C)		1850.0452	1909.9398	35.7	0.02
Extreme (40C)		1850.0452	1909.9398	29.4	0.02
Extreme (30C)		1850.0452	1909.9398	28.8	0.02
Extreme (10C)		1850.0452	1909.9398	50.3	0.03
Extreme (0C)		1850.0452	1909.9398	48.1	0.03
Extreme (-10C)		1850.0452	1909.9398	57.3	0.03
Extreme (-20C)		1850.0452	1909.9398	38.5	0.02
Extreme (-30C)		1850.0452	1909.9398	40.1	0.02
25C	10%	1850.0452	1909.9398	30.5	0.02
	-10%	1850.0452	1909.9398	24.9	0.01
	End Point	1850.0452	1909.9397	21.3	0.01

CDMA 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0084	848.9999	Delta (Hz)	Frequency Stability (ppm)
Extreme (50C)		824.0084	848.9999		0.00
Extreme (40C)		824.0084	848.9999		0.01
Extreme (30C)		824.0084	848.9999		0.00
Extreme (10C)		824.0084	848.9999		0.00
Extreme (0C)		824.0084	848.9999		0.01
Extreme (-10C)		824.0084	848.9999		0.01
Extreme (-20C)		824.0084	848.9999		0.01
Extreme (-30C)		824.0084	848.9999		0.01
25C	10%	824.0084	848.9999	3.8	0.00
	-10%	824.0084	848.9999	5.9	0.01
	End Point	824.0084	848.9999	5.7	0.01

CDMA 1x RTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.5534	1909.4428	Delta (Hz)	Frequency Stability (ppm)
Extreme (50C)		1850.5534	1909.4428		0.00
Extreme (40C)		1850.5534	1909.4428		0.00
Extreme (30C)		1850.5534	1909.4428		0.00
Extreme (10C)		1850.5534	1909.4428		0.00
Extreme (0C)		1850.5534	1909.4428		0.00
Extreme (-10C)		1850.5534	1909.4428		0.01
Extreme (-20C)		1850.5534	1909.4428		0.01
Extreme (-30C)		1850.5534	1909.4428		0.01
25C	10%	1850.5534	1909.4428	14.4	0.01
	-10%	1850.5534	1909.4428	9.5	0.01
	End Point	1850.5534	1909.4428	7.9	0.00

CDMA 1xRTT BC15

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.5571	1754.4417		
Extreme (50C)		1710.5570	1754.4417	-10.8	-0.01
Extreme (40C)		1710.5570	1754.4417	-12.5	-0.01
Extreme (30C)		1710.5570	1754.4417	-12.2	-0.01
Extreme (10C)		1710.5570	1754.4417	-10.4	-0.01
Extreme (0C)		1710.5570	1754.4417	-8.7	-0.01
Extreme (-10C)		1710.5570	1754.4417	-8.3	0.00
Extreme (-20C)		1710.5571	1754.4417	-1.3	0.00
Extreme (-30C)		1710.5571	1754.4417	0.6	0.00
25C	10%	1710.5571	1754.4417	0.5	0.00
	-10%	1710.5571	1754.4417	-1.8	0.00
	End Point	1710.5570	1754.4417	-7.7	0.00

CDMA 1xRTT BC10

Limit		816.35	823.65	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	816.5582	823.4419		
Extreme (50C)		816.5582	823.4419	-9.8	-0.01
Extreme (40C)		816.5582	823.4419	-9.6	-0.01
Extreme (30C)		816.5582	823.4419	-9.4	-0.01
Extreme (10C)		816.5582	823.4419	-8.5	-0.01
Extreme (0C)		816.5582	823.4419	-5.9	-0.01
Extreme (-10C)		816.5582	823.4419	-2.3	0.00
Extreme (-20C)		816.5582	823.4419	-1.4	0.00
Extreme (-30C)		816.5582	823.4419	-0.4	0.00
25C	10%	816.5582	823.4419	-8.2	-0.01
	-10%	816.5582	823.4419	-7.8	-0.01
	End Point	816.5582	823.4419	-6.9	-0.01

UMTS REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.1283	848.8772	4.5	0.01
Extreme (50C)		824.1283	848.8772		
Extreme (40C)		824.1283	848.8772		
Extreme (30C)		824.1283	848.8772		
Extreme (10C)		824.1283	848.8772		
Extreme (0C)		824.1283	848.8772		
Extreme (-10C)		824.1283	848.8772		
Extreme (-20C)		824.1283	848.8772		
Extreme (-30C)		824.1283	848.8772		
25C	10%	824.1283	848.8772	6.4	0.01
	-10%	824.1283	848.8772	6.4	0.01
	End Point	824.1283	848.8772	4.5	0.01

UMTS REL99 BAND 2

Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage				
Normal (25C)	Normal	1850.1273	1909.8669	3.6	0.00
Extreme (50C)		1850.1273	1909.8669		
Extreme (40C)		1850.1273	1909.8669		
Extreme (30C)		1850.1273	1909.8669		
Extreme (10C)		1850.1273	1909.8669		
Extreme (0C)		1850.1273	1909.8669		
Extreme (-10C)		1850.1273	1909.8669		
Extreme (-20C)		1850.1273	1909.8669		
Extreme (-30C)		1850.1273	1909.8669		
25C	10%	1850.1273	1909.8669	4.3	0.00
	-10%	1850.1273	1909.8669	4.3	0.00
	End Point	1850.1273	1909.8669	3.9	0.00

UMTS REL99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.1309	1754.8765	10.1	0.01
Extreme (50C)		1710.1309	1754.8765		
Extreme (40C)		1710.1309	1754.8765		
Extreme (30C)		1710.1309	1754.8765		
Extreme (10C)		1710.1309	1754.8765		
Extreme (0C)		1710.1309	1754.8765		
Extreme (-10C)		1710.1309	1754.8765		
Extreme (-20C)		1710.1309	1754.8765		
Extreme (-30C)		1710.1309	1754.8765		
25C	10%	1710.1309	1754.8765	10.1	0.01
	-10%	1710.1309	1754.8765	15.5	0.01
	End Point	1710.1309	1754.8765	16.1	0.01

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP), MODEL: A1634 (LAT)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635

LIMITS

§22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

§24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

§27.50(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications

§90.635 Limitations on power and antenna height.

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

Table—Equivalent Power and Antenna Heights for Base Stations in the 851–869 MHz and 935–940 MHz Bands Which Have a Requirement for a 32 km (20 mi) Service Area Radius

Antenna height (ATT) meters (feet)	Effective radiated power (watts) ^{1,2,4}
Above 1,372 (4,500)	65
Above 1,220 (4,000) to 1,372 (4,500)	70
Above 1,067 (3,500) to 1,220 (4,000)	75
Above 915 (3,000) to 1,067 (3,500)	100
Above 763 (2,500) to 915 (3,000)	140
Above 610 (2,000) to 763 (2,500)	200
Above 458 (1,500) to 610 (2,000)	350
Above 305 (1,000) to 458 (1,500)	600
Up to 305 (1,000)	31,000

1 Power is given in terms of effective radiated power (ERP).

2 Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.

3 Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

KDB 971168 D01 RF Power output using broadband peak and average power meter method

MODES TESTED

- GPRS/EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO Rev A

RESULTS

10.1.1. GSM

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	28.44	698.23
		190	836.6	28.16	654.64
		251	848.8	28.65	732.82
	EGPRS	128	824.2	24.13	258.82
		190	836.6	24.16	260.62
		251	848.8	24.25	266.07

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	31.36	1367.73
		661	1880.0	31.14	1300.17
		810	1909.8	31.99	1581.25
	EGPRS	512	1850.2	27.90	616.60
		661	1880.0	28.04	636.80
		810	1909.8	28.49	706.32

10.1.2. CDMA2000**Part 90 800MHz Band**

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	19.96	99.08
		560	820.0	19.64	92.04
		670	822.8	19.72	93.76
	BC10, EVDO A	450	817.3	19.97	99.31
		560	820.0	19.63	91.83
		670	822.8	19.74	94.19

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	18.83	76.38
		384	836.5	19.68	92.90
		777	848.3	20.15	103.51
	BC 0, EVDO Rev A	1013	824.7	18.85	76.74
		384	836.5	19.66	92.47
		777	848.3	20.16	103.75

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	25.20	331.13
		600	1880.0	25.34	341.98
		1175	1908.8	25.48	353.18
	BC1, EVDO REV A	25	1851.3	25.20	331.13
		600	1880.0	25.44	349.95
		1175	1908.8	25.50	354.81

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	BC15, 1xRTT	25	1711.3	22.45	175.79
		450	1732.5	22.17	164.82
		875	1753.8	22.05	160.32
	BC15, EVDO, REV A	25	1711.3	22.49	177.42
		450	1732.5	22.21	166.34
		875	1753.8	22.07	161.06

10.1.3. UMTS

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	19.43	87.70
		4183	836.6	20.06	101.39
		4233	846.6	20.15	103.51
	UMTS, HSDPA	4132	826.4	18.63	72.95
		4183	836.6	19.16	82.41
		4233	846.6	19.35	86.10

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	25.20	331.13
		9800	1880.0	25.24	334.20
		9938	1907.6	25.49	354.00
	UMTS, HSDPA	9662	1852.4	24.50	281.84
		9800	1880.0	24.14	259.42
		9938	1907.6	24.39	274.79

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	22.65	184.08
		1638	1732.6	22.27	168.66
		1738	1752.5	22.35	171.79
	UMTS, HSDPA	1537	1712.4	21.75	149.62
		1638	1732.6	21.47	140.28
		1738	1752.5	21.45	139.64

GSM**GPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H																				
Company:																				
Project #:	15U20162																			
Date:	06/16/15																			
Test Engineer:	R.Z																			
Configuration:	EUT only																			
Mode:	GPRS 850MHz																			
<u>Test Equipment:</u>																				
Receiving: Sunol T900, and Chamber H Cable																				
Substitution: Dipole T416, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	29.1	V	0.6	0.0	28.44	30.59	38.45	40.60	-10.0											
824.20	11.7	H	0.6	0.0	11.07	13.22	38.45	40.60	-27.4											
Mid Ch																				
836.60	28.8	V	0.6	0.0	28.16	30.31	38.45	40.60	-10.3											
836.60	12.1	H	0.6	0.0	11.46	13.61	38.45	40.60	-27.0											
High Ch																				
848.80	29.3	V	0.6	0.0	28.65	30.80	38.45	40.60	-9.8											
848.80	12.7	H	0.6	0.0	12.09	14.24	38.45	40.60	-26.4											

Rev. 06.18.14

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber H																				
Company:																				
Project #:	15U20162																			
Date:	06/16/15																			
Test Engineer:	R.Z																			
Configuration:	EUT only																			
Mode:	EDGE 850MHz																			
Test Equipment:																				
Receiving: Sunol T900, and Chamber H Cable																				
Substitution: Dipole T416, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	24.8	V	0.6	0.0	24.13	26.28	38.45	40.60	-14.3											
824.20	8.3	H	0.6	0.0	7.65	9.80	38.45	40.60	-30.8											
Mid Ch																				
836.60	24.8	V	0.6	0.0	24.16	26.31	38.45	40.60	-14.3											
836.60	8.2	H	0.6	0.0	7.56	9.71	38.45	40.60	-30.9											
High Ch																				
848.80	24.9	V	0.6	0.0	24.25	26.40	38.45	40.60	-14.2											
848.80	7.7	H	0.6	0.0	7.08	9.23	38.45	40.60	-31.4											
Rev. 06.18.14																				

GPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/18/15 Test Engineer: R.Z Configuration: EUT only Mode: GPRS 1900MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	24.3	V	0.98	8.05	31.36	33.0	-1.6	
1.851	24.2	H	0.98	8.05	31.30	33.0	-1.7	
Mid Ch								
1.880	24.0	V	0.98	8.03	31.09	33.0	-1.9	
1.880	24.1	H	0.98	8.03	31.14	33.0	-1.9	
High Ch								
1.910	24.0	V	0.98	8.05	31.03	33.0	-2.0	
1.910	24.9	H	0.98	8.05	31.99	33.0	-1.0	

Rev. 06.18.14

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: R.Z Configuration: EUT only Mode: EDGE 1900MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	20.7	V	0.98	8.05	27.76	33.0	-5.2	
1.851	20.8	H	0.98	8.05	27.90	33.0	-5.1	
Mid Ch								
1.880	20.3	V	0.98	8.03	27.39	33.0	-5.6	
1.880	21.0	H	0.98	8.03	28.04	33.0	-5.0	
High Ch								
1.910	20.8	V	0.98	8.05	27.83	33.0	-5.2	
1.910	21.4	H	0.98	8.05	28.49	33.0	-4.5	
Rev. 06.18.14								

CDMA2000**CDMA2000 1xRTT, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H																
Company:																
Project #:	15U20162															
Date:	06/22/15															
Test Engineer:	R.Z															
Configuration:	EUT only															
Mode:	CDMA 1XRTT 800MHz															
Test Equipment:																
Receiving: Sunol T900, and Chamber H Cable																
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
817.25	20.58	V	0.6	0.0	19.96	50.00	-30.0									
817.25	1.72	H	0.6	0.0	1.10	50.00	48.9									
Mid Ch																
820.00	20.26	V	0.6	0.0	19.64	50.00	-30.4									
820.00	1.13	H	0.6	0.0	0.51	50.00	49.5									
High Ch																
822.75	20.34	V	0.6	0.0	19.72	50.00	-30.3									
822.75	1.08	H	0.6	0.0	0.46	50.00	49.5									
Rev. 05.21.15																

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/22/15 Test Engineer: R.Z Configuration: EUT only Mode: CDMA Rev A 800MHz								
Test Equipment: Receiving: Sunol T900, and Chamber H Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	20.59	V	0.6	0.0	19.97	50.00	-30.0	
817.25	1.86	H	0.6	0.0	1.24	50.00	-48.8	
Mid Ch								
820.00	20.25	V	0.6	0.0	19.63	50.00	-30.4	
820.00	1.18	H	0.6	0.0	0.56	50.00	-49.4	
High Ch								
822.75	20.36	V	0.6	0.0	19.74	50.00	-30.3	
822.75	1.15	H	0.6	0.0	0.53	50.00	-49.5	
Rev. 05.21.15								

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
Company: Project #: 15U20162 Date: 06/22/15 Test Engineer: R.Z Configuration: EUT only Mode: CDMA 1xRTT 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber H Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	19.5	V	0.6	0.0	18.83	20.98	38.45	40.60	-19.6	
824.70	1.2	H	0.6	0.0	0.55	2.70	38.45	40.60	-37.9	
Mid Ch										
836.52	20.3	V	0.6	0.0	19.68	21.83	38.45	40.60	-18.8	
836.52	2.6	H	0.6	0.0	1.96	4.11	38.45	40.60	-36.5	
High Ch										
848.31	20.8	V	0.6	0.0	20.15	22.30	38.45	40.60	-18.3	
848.31	3.5	H	0.6	0.0	2.88	5.03	38.45	40.60	-35.6	
Rev. 06.18.14										

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
Company: Project #: 15U20162 Date: 06/22/15 Test Engineer: R.Z Configuration: EUT only Mode: CDMA Rev A 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber H Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	19.5	V	0.6	0.0	18.85	21.00	38.45	40.60	-19.6	
824.70	1.3	H	0.6	0.0	0.63	2.78	38.45	40.60	-37.8	
Mid Ch										
836.52	20.3	V	0.6	0.0	19.66	21.81	38.45	40.60	-18.8	
836.52	2.6	H	0.6	0.0	1.94	4.09	38.45	40.60	-36.5	
High Ch										
848.31	20.8	V	0.6	0.0	20.16	22.31	38.45	40.60	-18.3	
848.31	3.5	H	0.6	0.0	2.92	5.07	38.45	40.60	-35.5	

Rev. 06.18.14

CDMA2000 1xRTT, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/22/15 Test Engineer: R.Z Configuration: EUT only Mode: CDMA 1XRTT 1900MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	17.5	V	0.98	8.05	24.56	33.0	-8.4	
1.851	18.1	H	0.98	8.05	25.20	33.0	-7.8	
Mid Ch								
1.880	17.6	V	0.98	8.03	24.69	33.0	-8.3	
1.880	18.3	H	0.98	8.03	25.34	33.0	-7.7	
High Ch								
1.909	17.8	V	0.98	8.05	24.83	33.0	-8.2	
1.909	18.4	H	0.98	8.05	25.48	33.0	-7.5	

Rev. 06.18.14

EVDO-Rev A, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/22/15 Test Engineer: R.Z Configuration: EUT only Mode: CDMA Rev A 1900MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	17.6	V	0.98	8.05	24.66	33.0	-8.3	
1.851	18.1	H	0.98	8.05	25.20	33.0	-7.8	
Mid Ch								
1.880	17.7	V	0.98	8.03	24.79	33.0	-8.2	
1.880	18.4	H	0.98	8.03	25.44	33.0	-7.6	
High Ch								
1.909	17.8	V	0.98	8.05	24.83	33.0	-8.2	
1.909	18.4	H	0.98	8.05	25.50	33.0	-7.5	
Rev. 05.21.15								

CDMA2000 1xRTT, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/22/15 Test Engineer: R.Z Configuration: EUT only Mode: CDMA 1XRTT 1700MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	13.9	V	0.95	8.27	21.26	30.0	-8.7	
1.711	15.1	H	0.95	8.27	22.45	30.0	-7.5	
Mid Ch								
1.733	14.2	V	0.95	8.23	21.46	30.0	-8.5	
1.733	14.9	H	0.95	8.23	22.17	30.0	-7.8	
High Ch								
1.754	14.1	V	0.95	8.18	21.38	30.0	-8.6	
1.754	14.8	H	0.95	8.18	22.05	30.0	-8.0	
Rev. 05.21.15								

EVDO-Rev A, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/22/15 Test Engineer: R.Z Configuration: EUT only Mode: CDMA Rev A 1700MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	14.0	V	0.95	8.27	21.36	30.0	-8.6	
1.711	15.2	H	0.95	8.27	22.49	30.0	-7.5	
Mid Ch								
1.733	14.2	V	0.95	8.23	21.46	30.0	-8.5	
1.733	14.9	H	0.95	8.23	22.21	30.0	-7.8	
High Ch								
1.754	14.0	V	0.95	8.18	21.28	30.0	-8.7	
1.754	14.8	H	0.95	8.18	22.07	30.0	-7.9	
Rev. 05.21.15								

UMTS**UMTS REL 99, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: R.Z Configuration: EUT only Mode: WCDMA Rel 99 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber H Cable Substitution: Dipole T416, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	20.1	V	0.6	0.0	19.43	21.58	38.45	40.60	-19.0	
826.40	3.4	H	0.6	0.0	2.75	4.90	38.45	40.60	-35.7	
Mid Ch										
836.60	20.7	V	0.6	0.0	20.06	22.21	38.45	40.60	-18.4	
836.60	3.5	H	0.6	0.0	2.86	5.01	38.45	40.60	-35.6	
High Ch										
846.60	20.8	V	0.6	0.0	20.15	22.30	38.45	40.60	-18.3	
846.60	4.3	H	0.6	0.0	3.68	5.83	38.45	40.60	-34.8	
Rev. 05.21.15										

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
Company: Project #: 15U20162 Date: 06/23/15 Test Engineer: R.Z Configuration: EUT Only Mode: WCDMA HSDPA 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber H Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	19.3	V	0.6	0.0	18.63	20.78	38.45	40.60	-19.8	
826.40	2.7	H	0.6	0.0	2.05	4.20	38.45	40.60	-36.4	
Mid Ch										
836.00	19.8	V	0.6	0.0	19.16	21.31	38.45	40.60	-19.3	
836.00	2.6	H	0.6	0.0	1.96	4.11	38.45	40.60	-36.5	
High Ch										
846.00	20.0	V	0.6	0.0	19.35	21.50	38.45	40.60	-19.1	
846.00	2.9	H	0.6	0.0	2.28	4.43	38.45	40.60	-36.2	
Rev. 05.21.15										

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: R.Z Configuration: EUT only Mode: WCDMA Rel 99 1900MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	17.5	V	0.98	8.05	24.56	33.0	8.4	
1.852	18.1	H	0.98	8.05	25.20	33.0	-7.8	
Mid Ch								
1.880	18.0	V	0.98	8.03	25.09	33.0	-7.9	
1.880	18.2	H	0.98	8.03	25.24	33.0	-7.8	
High Ch								
1.908	18.1	V	0.98	8.05	25.13	33.0	-7.9	
1.908	18.4	H	0.98	8.05	25.49	33.0	-7.5	
Rev. 05.21.15								

UMTS HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H															
Company:															
Project #:	15U20162														
Date:	06/22/15														
Test Engineer:	R.Z														
Configuration:	EUT only														
Mode:	WCDMA HSDPA 1900MHz														
Test Equipment:															
Receiving: Horn T863 and Chamber H SMA Cables															
Substitution: Horn T60 Substitution, and 8ft SMA Cable															
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes							
Low Ch															
1.852	15.3	V	0.98	8.05	22.36	33.0	-10.6								
1.852	17.4	H	0.98	8.05	24.50	33.0	-8.5								
Mid Ch															
1.880	17.0	V	0.98	8.03	24.09	33.0	-8.9								
1.880	17.1	H	0.98	8.03	24.14	33.0	-8.9								
High Ch															
1.908	14.7	V	0.98	8.05	21.73	33.0	-11.3								
1.908	17.3	H	0.98	8.05	24.39	33.0	-8.6								
Rev. 05.21.15															

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber E																
Company:																
Project #:	15U20162															
Date:	06/16/15															
Test Engineer:	R.Z															
Configuration:	EUT only															
Mode:	WCDMA Rel 99 1700MHz															
Test Equipment:																
Receiving: Horn T863 and Chamber H SMA Cables																
Substitution: Horn T60 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.712	12.7	V	0.95	8.27	20.06	30.0	-9.9									
1.712	15.3	H	0.95	8.27	22.65	30.0	-7.4									
Mid Ch																
1.733	12.5	V	0.95	8.23	19.76	30.0	-10.2									
1.733	15.0	H	0.95	8.23	22.27	30.0	-7.7									
High Ch																
1.753	12.6	V	0.95	8.18	19.88	30.0	-10.1									
1.753	15.1	H	0.95	8.18	22.35	30.0	-7.6									
Rev. 05.21.15																

UMTS HSDPA, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: R.Z Configuration: EUT only Mode: WCDMA HSDPA 1700MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	11.9	V	0.95	8.27	19.26	30.0	-10.7	
1.712	14.4	H	0.95	8.27	21.75	30.0	-8.3	
Mid Ch								
1.733	11.6	V	0.95	8.23	18.86	30.0	-11.1	
1.733	14.2	H	0.95	8.23	21.47	30.0	-8.5	
High Ch								
1.753	11.7	V	0.95	8.18	18.98	30.0	-11.0	
1.753	14.2	H	0.95	8.18	21.45	30.0	-8.5	
Rev. 05.21.15								

10.2. RADIATED POWER (ERP & EIRP), MODEL: A1634 (UAT)

10.2.1. GSM

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	23.53	225.42
		190	836.6	23.36	216.77
		251	848.8	23.95	248.31
	EGPRS	128	824.2	19.33	85.70
		190	836.6	19.26	84.33
		251	848.8	19.45	88.10

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	27.16	520.00
		661	1880.0	27.39	548.28
		810	1909.8	27.24	529.66
	EGPRS	512	1850.2	24.36	272.90
		661	1880.0	24.79	301.30
		810	1909.8	25.24	334.20

10.2.2. CDMA2000

Part 90 800MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	14.21	26.36
		560	820.0	14.14	25.94
		670	822.8	14.32	27.04
	BC10, EVDO A	450	817.3	14.24	26.55
		560	820.0	14.17	26.12
		670	822.8	14.35	27.23

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	15.03	31.84
		384	836.5	15.46	35.16
		777	848.3	15.35	34.28
	BC 0, EVDO Rev A	1013	824.7	15.05	31.99
		384	836.5	15.50	35.48
		777	848.3	15.40	34.67

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	18.46	70.15
		600	1880.0	18.29	67.45
		1175	1908.8	18.14	65.16
	BC1, EVDO REV A	25	1851.3	18.48	70.47
		600	1880.0	18.34	68.23
		1175	1908.8	18.20	66.07

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	BC15, 1xRTT	25	1711.3	20.75	118.85
		450	1732.5	20.93	123.88
		875	1753.8	21.06	127.64
	BC15, EVDO, REV A	25	1711.3	20.85	121.62
		450	1732.5	20.95	124.45
		875	1753.8	21.10	128.82

10.2.3. UMTS

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	15.13	32.58
		4183	836.6	15.46	35.16
		4233	846.6	15.35	34.28
	UMTS, HSDPA	4132	826.4	14.23	26.49
		4183	836.6	14.56	28.58
		4233	846.6	14.45	27.86

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	18.55	71.61
		9800	1880.0	18.24	66.68
		9938	1907.6	18.39	69.02
	UMTS, HSDPA	9662	1852.4	17.70	58.88
		9800	1880.0	17.54	56.75
		9938	1907.6	17.58	57.28

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	20.95	124.45
		1638	1732.6	21.13	129.72
		1738	1752.5	20.96	124.74
	UMTS, HSDPA	1537	1712.4	20.03	100.69
		1638	1732.6	20.23	105.44
		1738	1752.5	19.76	94.62

GSM**GPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: T Wang Configuration: EUT only Mode: GSM 850MHz										
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	24.2	V	0.6	0.0	23.53	25.68	38.45	40.60	-14.9	
824.20	5.5	H	0.6	0.0	4.85	7.00	38.45	40.60	-33.6	
Mid Ch										
836.60	24.0	V	0.6	0.0	23.36	25.51	38.45	40.60	-15.1	
836.60	7.1	H	0.6	0.0	6.46	8.61	38.45	40.60	-32.0	
High Ch										
848.80	24.6	V	0.6	0.0	23.95	26.10	38.45	40.60	-14.5	
848.80	9.4	H	0.6	0.0	8.78	10.93	38.45	40.60	-29.7	
Rev. 06.18.14										

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G																				
Company:																				
Project #:	15U20162																			
Date:	06/16/15																			
Test Engineer:	T Wang																			
Configuration:	EUT only																			
Mode:	EDGE 850MHz																			
Test Equipment:																				
Receiving: Sunol T899, and Chamber G Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	20.0	V	0.6	0.0	19.33	21.48	38.45	40.60	-19.1											
824.20	1.6	H	0.6	0.0	0.95	3.10	38.45	40.60	-37.5											
Mid Ch																				
836.60	19.9	V	0.6	0.0	19.26	21.41	38.45	40.60	-19.2											
836.60	4.0	H	0.6	0.0	3.36	5.51	38.45	40.60	-35.1											
High Ch																				
848.80	20.1	V	0.6	0.0	19.45	21.60	38.45	40.60	-19.0											
848.80	6.7	H	0.6	0.0	6.08	8.23	38.45	40.60	-32.4											
Rev. 06.18.14																				

GPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: T Wang Configuration: EUT only Mode: GSM 1900MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.8502	18.8	V	0.98	8.05	25.91	33.0	-7.1	
1.8502	20.1	H	0.98	8.05	27.16	33.0	-5.8	
Mid Ch								
1.880	18.8	V	0.98	8.03	25.87	33.0	-7.1	
1.880	20.3	H	0.98	8.03	27.39	33.0	-5.6	
High Ch								
1.9098	19.0	V	0.98	8.05	26.07	33.0	-6.9	
1.9098	20.2	H	0.98	8.05	27.24	33.0	-5.8	

Rev. 06.18.14

EGPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company:								
Project #: 15U20162								
Date: 06/16/15								
Test Engineer: T Wang								
Configuration: EUT only								
Mode: EDGE 1900MHz								
Test Equipment:								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	16.3	V	0.98	8.05	23.41	33.0	-9.6	
1.851	17.3	H	0.98	8.05	24.36	33.0	-8.6	
Mid Ch								
1.880	15.9	V	0.98	8.03	22.97	33.0	-10.0	
1.880	17.7	H	0.98	8.03	24.79	33.0	-8.2	
High Ch								
1.910	17.0	V	0.98	8.05	24.07	33.0	-8.9	
1.910	18.2	H	0.98	8.05	25.24	33.0	-7.8	
Rev. 06.18.14								

CDMA2000**CDMA2000 1xRTT, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/20/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA 1XRTT 800MHz								
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	14.83	V	0.6	0.0	14.21	50.00	-35.8	
817.25	1.23	H	0.6	0.0	0.61	50.00	-49.4	
Mid Ch								
820.00	14.76	V	0.6	0.0	14.14	50.00	-35.9	
820.00	1.63	H	0.6	0.0	1.01	50.00	-49.0	
High Ch								
822.75	14.94	V	0.6	0.0	14.32	50.00	-35.7	
822.75	2.18	H	0.6	0.0	1.56	50.00	-48.4	

Rev. 05.21.15

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA Rev A 800MHz								
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	14.86	V	0.6	0.0	14.24	50.00	-35.8	
817.25	1.33	H	0.6	0.0	0.71	50.00	-49.3	
Mid Ch								
820.00	14.79	V	0.6	0.0	14.17	50.00	-35.8	
820.00	1.73	H	0.6	0.0	1.11	50.00	-48.9	
High Ch								
822.75	14.97	V	0.6	0.0	14.35	50.00	-35.6	
822.75	2.18	H	0.6	0.0	1.56	50.00	-48.4	

Rev. 05.21.15

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber G																				
Company:																				
Project #:	15U20162																			
Date:	06/20/15																			
Test Engineer:	T Wang																			
Configuration:	EUT only																			
Mode:	CDMA 1XRTT 850MHz																			
Test Equipment:																				
Receiving: Sunol T899, and Chamber G Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.70	15.7	V	0.6	0.0	15.03	17.18	38.45	40.60	-23.4											
824.70	0.4	H	0.6	0.0	-0.25	1.90	38.45	40.60	-38.7											
Mid Ch																				
836.52	16.1	V	0.6	0.0	15.46	17.61	38.45	40.60	-23.0											
836.52	-0.4	H	0.6	0.0	-1.04	1.11	38.45	40.60	-39.5											
High Ch																				
848.31	16.0	V	0.6	0.0	15.35	17.50	38.45	40.60	-23.1											
848.31	-0.5	H	0.6	0.0	-1.12	1.03	38.45	40.60	-39.6											
Rev. 06.18.14																				

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA Rev A 850MHz										
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	15.7	V	0.6	0.0	15.05	17.20	38.45	40.60	-23.4	
824.70	0.3	H	0.6	0.0	-0.35	1.80	38.45	40.60	-38.8	
Mid Ch										
836.52	16.1	V	0.6	0.0	15.50	17.65	38.45	40.60	-22.9	
836.52	-0.5	H	0.6	0.0	-1.14	1.01	38.45	40.60	-39.6	
High Ch										
848.31	16.0	V	0.6	0.0	15.40	17.55	38.45	40.60	-23.0	
848.31	-0.4	H	0.6	0.0	-1.02	1.13	38.45	40.60	-39.5	
Rev. 06.18.14										

CDMA2000 1xRTT, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/20/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA 1XRTT 1900MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.8510	9.2	V	0.98	8.05	16.31	33.0	-16.7	
1.8510	11.4	H	0.98	8.05	18.46	33.0	-14.5	
Mid Ch								
1.880	9.3	V	0.98	8.03	16.37	33.0	-16.6	
1.880	11.2	H	0.98	8.03	18.29	33.0	-14.7	
High Ch								
1.9088	9.9	V	0.98	8.05	16.97	33.0	-16.0	
1.9088	11.1	H	0.98	8.05	18.14	33.0	-14.9	

Rev. 06.18.14

EVDO-Rev A, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G																
Company:																
Project #:	15U20162															
Date:	06/20/15															
Test Engineer:	T Wang															
Configuration:	EUT only															
Mode:	CDMA Rev A 1900MHz															
<u>Test Equipment:</u>																
Receiving: Horn T862 and Chamber G SMA Cables																
Substitution: Horn T59 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.851	9.2	V	0.98	8.05	16.30	33.0	-16.7									
1.851	11.4	H	0.98	8.05	18.48	33.0	-14.5									
Mid Ch																
1.880	9.4	V	0.98	8.03	16.41	33.0	-16.6									
1.880	11.3	H	0.98	8.03	18.34	33.0	-14.7									
High Ch																
1.909	9.9	V	0.98	8.05	17.01	33.0	-16.0									
1.909	11.1	H	0.98	8.05	18.20	33.0	-14.8									
Rev. 05.21.15																

CDMA2000 1xRTT, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/20/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA 1XRTT 1700MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	12.4	V	0.95	8.27	19.72	30.0	-10.3	
1.711	13.4	H	0.95	8.27	20.75	30.0	-9.2	
Mid Ch								
1.733	12.4	V	0.95	8.23	19.63	30.0	-10.4	
1.733	13.7	H	0.95	8.23	20.93	30.0	-9.1	
High Ch								
1.754	12.1	V	0.95	8.18	19.31	30.0	-10.7	
1.754	13.8	H	0.95	8.18	21.06	30.0	-8.9	
Rev. 05.21.15								

EVDO-Rev A, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/20/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA Rev A 1700MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	12.4	V	0.95	8.27	19.75	30.0	-10.2	
1.711	13.5	H	0.95	8.27	20.85	30.0	-9.1	
Mid Ch								
1.733	12.4	V	0.95	8.23	19.65	30.0	-10.4	
1.733	13.7	H	0.95	8.23	20.95	30.0	-9.1	
High Ch								
1.754	12.0	V	0.95	8.18	19.26	30.0	-10.7	
1.754	13.9	H	0.95	8.18	21.10	30.0	-8.9	
Rev. 05.21.15								

UMTS**UMTS REL 99, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: T Wang Configuration: EUT only Mode: WCDMA Rel 99 850MHz										
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	15.8	V	0.6	0.0	15.13	17.28	38.45	40.60	-23.3	
826.40	-2.6	H	0.6	0.0	-3.25	-1.10	38.45	40.60	-41.7	
Mid Ch										
836.60	16.1	V	0.6	0.0	15.46	17.61	38.45	40.60	-23.0	
836.60	-1.4	H	0.6	0.0	-2.04	0.11	38.45	40.60	-40.5	
High Ch										
846.60	16.0	V	0.6	0.0	15.35	17.50	38.45	40.60	-23.1	
846.60	-0.6	H	0.6	0.0	-1.22	0.93	38.45	40.60	-39.7	
Rev. 05.21.15										

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G																				
Company:																				
Project #:	15U20162																			
Date:	06/19/15																			
Test Engineer:	T Wang																			
Configuration:	EUT only																			
Mode:	WCDMA HSDPA 850MHz																			
Test Equipment:																				
Receiving: Sunol T899, and Chamber G Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
826.40	14.9	V	0.6	0.0	14.23	16.38	38.45	40.60	-24.2											
826.40	-2.8	H	0.6	0.0	-3.45	-1.30	38.45	40.60	-41.9											
Mid Ch																				
836.60	15.2	V	0.6	0.0	14.56	16.71	38.45	40.60	-23.9											
836.60	-1.5	H	0.6	0.0	-2.14	0.01	38.45	40.60	-40.6											
High Ch																				
846.60	15.1	V	0.6	0.0	14.45	16.60	38.45	40.60	-24.0											
846.60	-1.0	H	0.6	0.0	-1.62	0.53	38.45	40.60	-40.1											
Rev. 05.21.15																				

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H																
Company:																
Project #:	15U20162															
Date:	06/16/15															
Test Engineer:	R.Z															
Configuration:	EUT only															
Mode:	WCDMA Rel 99 1900MHz															
Test Equipment:																
Receiving: Horn T863 and Chamber H SMA Cables																
Substitution: Horn T60 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.852	9.3	V	0.98	8.05	16.41	33.0	-16.6									
1.852	11.5	H	0.98	8.05	18.55	33.0	-14.5									
Mid Ch																
1.880	8.9	V	0.98	8.03	15.99	33.0	-17.0									
1.880	11.2	H	0.98	8.03	18.24	33.0	-14.8									
High Ch																
1.908	9.7	V	0.98	8.05	16.73	33.0	-16.3									
1.908	11.3	H	0.98	8.05	18.39	33.0	-14.6									
Rev. 05.21.15																

UMTS HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H																
Company:																
Project #:	15U20162															
Date:	06/23/15															
Test Engineer:	R.Z															
Configuration:	EUT Only															
Mode:	WCDMA DC HSDPA 1900MHz															
Test Equipment:																
Receiving: Horn T863 and Chamber H SMA Cables																
Substitution: Horn T59 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.852	8.5	V	0.98	8.05	15.56	33.0	-17.4									
1.852	10.6	H	0.98	8.05	17.70	33.0	-15.3									
Mid Ch																
1.880	8.1	V	0.98	8.03	15.19	33.0	-17.8									
1.880	10.5	H	0.98	8.03	17.54	33.0	-15.5									
High Ch																
1.908	8.9	V	0.98	8.04	15.92	33.0	-17.1									
1.908	10.5	H	0.98	8.04	17.58	33.0	-15.4									
Rev. 05.21.15																

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/16/15 Test Engineer: T Wang Configuration: EUT only Mode: WCDMA Rel 99 1700MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	12.2	V	0.95	8.27	19.52	30.0	-10.5	
1.712	13.6	H	0.95	8.27	20.95	30.0	-9.1	
Mid Ch								
1.733	13.0	V	0.95	8.23	20.23	30.0	-9.8	
1.733	13.9	H	0.95	8.23	21.13	30.0	-8.9	
High Ch								
1.753	12.6	V	0.95	8.18	19.81	30.0	-10.2	
1.753	13.7	H	0.95	8.18	20.96	30.0	-9.0	

Rev. 05.21.15

UMTS HSDPA, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20162 Date: 06/24/15 Test Engineer: T Wang Configuration: EUT only Mode: WCDMA HSDPA 1700MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	11.6	V	0.95	8.27	18.92	30.0	-11.1	
1.712	12.7	H	0.95	8.27	20.03	30.0	-10.0	
Mid Ch								
1.7326	12.5	V	0.95	8.23	19.73	30.0	-10.3	
1.7326	13.0	H	0.95	8.23	20.23	30.0	-9.8	
High Ch								
1.7526	11.8	V	0.95	8.18	19.01	30.0	-11.0	
1.7526	12.5	H	0.95	8.18	19.76	30.0	-10.2	

Rev. 05.21.15

10.3. RADIATED POWER (ERP & EIRP), MODEL: A1687 (LAT)

10.3.1. GSM

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	28.33	680.77
		190	836.6	28.16	654.64
		251	848.8	28.55	716.14
	EGPRS	128	824.2	24.13	258.82
		190	836.6	24.06	254.68
		251	848.8	24.15	260.02

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	31.30	1348.96
		661	1880.0	31.24	1330.45
		810	1909.8	31.89	1545.25
	EGPRS	512	1850.2	27.66	583.45
		661	1880.0	27.94	622.30
		810	1909.8	28.39	690.24

10.3.2. CDMA2000

Part 90 800MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	19.91	97.95
		560	820.0	19.54	89.95
		670	822.8	19.62	91.62
	BC10, EVDO A	450	817.3	19.94	98.63
		560	820.0	19.52	89.54
		670	822.8	19.64	92.04

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	18.73	74.64
		384	836.5	19.56	90.36
		777	848.3	20.14	103.28
	BC 0, EVDO Rev A	1013	824.7	18.75	74.99
		384	836.5	19.57	90.57
		777	848.3	20.16	103.75

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	25.23	333.43
		600	1880.0	25.10	323.59
		1175	1908.8	25.38	345.14
	BC1, EVDO REV A	25	1851.3	25.21	331.89
		600	1880.0	25.12	325.09
		1175	1908.8	25.40	346.74

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	BC15, 1xRTT	25	1711.3	22.40	173.78
		450	1732.5	22.06	160.69
		875	1753.8	22.11	162.55
	BC15, EVDO, REV A	25	1711.3	22.42	174.58
		450	1732.5	22.05	160.32
		875	1753.8	22.13	163.31

10.3.3. UMTS**Part 22 850MHz Band**

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	19.33	85.70
		4183	836.6	19.96	99.08
		4233	846.6	20.05	101.16
	UMTS, HSDPA	4132	826.4	18.48	70.47
		4183	836.6	19.06	80.54
		4233	846.6	19.15	82.22

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	25.20	331.13
		9800	1880.0	25.24	334.20
		9938	1907.6	25.39	345.94
	UMTS, HSDPA	9662	1852.4	24.40	275.42
		9800	1880.0	24.34	271.64
		9938	1907.6	24.49	281.19

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	22.55	179.89
		1638	1732.6	22.27	168.66
		1738	1752.5	22.25	167.88
	UMTS, HSDPA	1537	1712.4	21.65	146.22
		1638	1732.6	21.37	137.09
		1738	1752.5	21.35	136.46

GSM**GPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H																				
Company:																				
Project #:	15U20163																			
Date:	06/26/15																			
Test Engineer:	M. Hua																			
Configuration:	EUT only																			
Mode:	GPRS 850MHz																			
Test Equipment:																				
Receiving: Sunol T900, and Chamber H Cable																				
Substitution: Dipole T416, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	29.0	V	0.6	0.0	28.33	30.48	38.45	40.60	-10.1											
824.20	11.8	H	0.6	0.0	11.15	13.30	38.45	40.60	-27.3											
Mid Ch																				
836.60	28.8	V	0.6	0.0	28.16	30.31	38.45	40.60	-10.3											
836.60	12.1	H	0.6	0.0	11.46	13.61	38.45	40.60	-27.0											
High Ch																				
848.80	29.2	V	0.6	0.0	28.55	30.70	38.45	40.60	-9.9											
848.80	12.6	H	0.6	0.0	11.98	14.13	38.45	40.60	-26.5											

Rev. 06.18.14

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
Company:										
Project #:	15U20163									
Date:	06/26/15									
Test Engineer:	M. Hua									
Configuration:	EUT only									
Mode:	EDGE 850MHz									
<u>Test Equipment:</u>										
Receiving:	Sunol T900, and Chamber H Cable									
Substitution:	Dipole T416, 8ft SMA Cable									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	24.8	V	0.6	0.0	24.13	26.28	38.45	40.60	-14.3	
824.20	8.3	H	0.6	0.0	7.65	9.80	38.45	40.60	-30.8	
Mid Ch										
836.60	24.7	V	0.6	0.0	24.06	26.21	38.45	40.60	-14.4	
836.60	8.4	H	0.6	0.0	7.76	9.91	38.45	40.60	-30.7	
High Ch										
848.80	24.8	V	0.6	0.0	24.15	26.30	38.45	40.60	-14.3	
848.80	7.8	H	0.6	0.0	7.18	9.33	38.45	40.60	-31.3	
Rev. 06.18.14										

GPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT only Mode: GPRS 1900MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	24.2	V	0.98	8.05	31.26	33.0	-1.7	
1.851	24.2	H	0.98	8.05	31.30	33.0	-1.7	
Mid Ch								
1.880	24.0	V	0.98	8.03	31.09	33.0	-1.9	
1.880	24.2	H	0.98	8.03	31.24	33.0	-1.8	
High Ch								
1.910	24.0	V	0.98	8.05	31.03	33.0	-2.0	
1.910	24.8	H	0.98	8.05	31.89	33.0	-1.1	
Rev. 06.18.14								

EGPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company:								
Project #: 15U20163								
Date: 06/26/15								
Test Engineer: M. Hua								
Configuration: EUT only								
Mode: EDGE 1900MHz								
Test Equipment:								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	20.6	V	0.98	8.05	27.66	33.0	-5.3	
1.851	20.5	H	0.98	8.05	27.60	33.0	-5.4	
Mid Ch								
1.880	20.3	V	0.98	8.03	27.39	33.0	-5.6	
1.880	20.9	H	0.98	8.03	27.94	33.0	-5.1	
High Ch								
1.910	20.8	V	0.98	8.05	27.83	33.0	-5.2	
1.910	21.3	H	0.98	8.05	28.39	33.0	-4.6	
Rev. 06.18.14								

CDMA2000**CDMA2000 1xRTT, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company:								
Project #:	15U20163							
Date:	06/26/15							
Test Engineer:	M. Hua							
Configuration:	EUT only							
Mode:	CDMA 1XRTT 800MHz							
Test Equipment:								
Receiving: Sunol T900, and Chamber H Cable								
Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	20.53	V	0.6	0.0	19.91	50.00	-30.1	
817.25	1.53	H	0.6	0.0	0.91	50.00	-49.1	
Mid Ch								
820.00	20.16	V	0.6	0.0	19.54	50.00	-30.5	
820.00	1.12	H	0.6	0.0	0.50	50.00	-49.5	
High Ch								
822.75	20.24	V	0.6	0.0	19.62	50.00	-30.4	
822.75	1.04	H	0.6	0.0	0.42	50.00	-49.6	
Rev. 05.21.15								

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement
UL Fremont Radiated Chamber H

Company:
Project #: 15U20163
Date: 06/26/15
Test Engineer: M. Hua
Configuration: EUT only
Mode: CDMA Rev A 800MHz

Test Equipment:

Receiving: Sunol T900, and Chamber H Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	20.56	V	0.6	0.0	19.94	50.00	30.1	
817.25	1.58	H	0.6	0.0	0.96	50.00	49.0	
Mid Ch								
820.00	20.14	V	0.6	0.0	19.52	50.00	30.5	
820.00	1.15	H	0.6	0.0	0.53	50.00	49.5	
High Ch								
822.75	20.26	V	0.6	0.0	19.64	50.00	30.4	
822.75	1.11	H	0.6	0.0	0.49	50.00	49.5	

Rev. 05.21.15

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber E										
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT Only Mode: CDMA 1XRTT 850MHz										
Test Equipment: Receiving: Sunol T408, and Chamber E Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	19.3	V	0.6	0.0	18.73	20.88	38.45	40.60	-19.7	
824.70	2.5	H	0.6	0.0	1.85	4.00	38.45	40.60	-36.6	
Mid Ch										
836.52	20.2	V	0.6	0.0	19.56	21.71	38.45	40.60	-18.9	
836.52	2.7	H	0.6	0.0	2.09	4.24	38.45	40.60	-36.4	
High Ch										
848.31	20.8	V	0.6	0.0	20.14	22.29	38.45	40.60	-18.3	
848.31	3.0	H	0.6	0.0	2.41	4.56	38.45	40.60	-36.0	
Rev. 06.18.14										

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber E										
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT Only Mode: CDMA Rev A 850MHz										
Test Equipment: Receiving: Sunol T408, and Chamber E Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	19.4	V	0.6	0.0	18.75	20.90	38.45	40.60	-19.7	
824.70	2.5	H	0.6	0.0	1.84	3.99	38.45	40.60	-36.6	
Mid Ch										
836.52	20.2	V	0.6	0.0	19.57	21.72	38.45	40.60	-18.9	
836.52	2.6	H	0.6	0.0	1.99	4.14	38.45	40.60	-36.5	
High Ch										
848.31	20.8	V	0.6	0.0	20.16	22.31	38.45	40.60	-18.3	
848.31	3.1	H	0.6	0.0	2.46	4.61	38.45	40.60	-36.0	
Rev. 06.18.14										

CDMA2000 1xRTT, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT Only Mode: CDMA 1XRTT 1900MHz								
Test Equipment: Receiving: Horn T346 and Chamber E SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	17.6	V	0.98	8.05	24.69	33.0	-8.3	
1.851	18.2	H	0.98	8.05	25.23	33.0	-7.8	
Mid Ch								
1.880	17.3	V	0.98	8.03	24.32	33.0	-8.7	
1.880	18.1	H	0.98	8.03	25.10	33.0	-7.9	
High Ch								
1.909	17.6	V	0.98	8.05	24.64	33.0	-8.4	
1.909	18.3	H	0.98	8.05	25.38	33.0	-7.6	
Rev. 06.18.14								

EVDO-Rev A, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT Only Mode: CDMA Rev A 1900MHz								
Test Equipment: Receiving: Horn T346 and Chamber E SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	17.6	V	0.98	8.05	24.71	33.0	-8.3	
1.851	18.1	H	0.98	8.05	25.21	33.0	-7.8	
Mid Ch								
1.880	17.3	V	0.98	8.03	24.34	33.0	-8.7	
1.880	18.1	H	0.98	8.03	25.12	33.0	-7.9	
High Ch								
1.909	17.5	V	0.98	8.05	24.61	33.0	-8.4	
1.909	18.3	H	0.98	8.05	25.40	33.0	-7.6	
Rev. 05.21.15								

CDMA2000 1xRTT, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT Only Mode: CDMA 1XRTT 1700MHz								
Test Equipment: Receiving: Horn T346 and Chamber E SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	14.6	V	0.95	8.27	21.95	30.0	-8.0	
1.711	15.1	H	0.95	8.27	22.40	30.0	-7.6	
Mid Ch								
1.733	14.2	V	0.95	8.23	21.48	30.0	-8.5	
1.733	14.8	H	0.95	8.23	22.06	30.0	-7.9	
High Ch								
1.754	14.0	V	0.95	8.18	21.21	30.0	-8.8	
1.754	14.9	H	0.95	8.18	22.11	30.0	-7.9	
Rev. 05.21.15								

EVDO-Rev A, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT Only Mode: CDMA Rev A 1700MHz								
Test Equipment: Receiving: Horn T346 and Chamber E SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	14.5	V	0.95	8.27	21.85	30.0	-8.1	
1.711	15.1	H	0.95	8.27	22.42	30.0	-7.6	
Mid Ch								
1.733	14.3	V	0.95	8.23	21.58	30.0	-8.4	
1.733	14.8	H	0.95	8.23	22.05	30.0	-8.0	
High Ch								
1.754	14.0	V	0.95	8.18	21.20	30.0	-8.8	
1.754	14.9	H	0.95	8.18	22.13	30.0	-7.9	
Rev. 05.21.15								

UMTS**UMTS REL 99, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT only Mode: WCDMA Rel 99 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber H Cable Substitution: Dipole T416, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	20.0	V	0.6	0.0	19.33	21.48	38.45	40.60	-19.1	
826.40	3.4	H	0.6	0.0	2.75	4.90	38.45	40.60	-35.7	
Mid Ch										
836.60	20.6	V	0.6	0.0	19.96	22.11	38.45	40.60	-18.5	
836.60	3.5	H	0.6	0.0	2.86	5.01	38.45	40.60	-35.6	
High Ch										
846.60	20.7	V	0.6	0.0	20.05	22.20	38.45	40.60	-18.4	
846.60	4.2	H	0.6	0.0	3.58	5.73	38.45	40.60	-34.9	
Rev. 05.21.15										

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT only Mode: WCDMA HSDPA 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber H Cable Substitution: Dipole T416, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	19.1	V	0.6	0.0	18.48	20.63	38.45	40.60	-20.0	
826.40	2.3	H	0.6	0.0	1.65	3.80	38.45	40.60	-36.8	
Mid Ch										
836.60	19.7	V	0.6	0.0	19.06	21.21	38.45	40.60	-19.4	
836.60	2.6	H	0.6	0.0	1.96	4.11	38.45	40.60	-36.5	
High Ch										
846.60	19.8	V	0.6	0.0	19.15	21.30	38.45	40.60	-19.3	
846.60	3.3	H	0.6	0.0	2.68	4.83	38.45	40.60	-35.8	
Rev. 05.21.15										

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H																
Company:																
Project #:	15U20163															
Date:	06/26/15															
Test Engineer:	M. Hua															
Configuration:	EUT only															
Mode:	WCDMA Rel 99 1900MHz															
<u>Test Equipment:</u>																
Receiving: Horn T863 and Chamber H SMA Cables																
Substitution: Horn T60 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.852	17.6	V	0.98	8.05	24.66	33.0	-8.3									
1.852	18.1	H	0.98	8.05	25.20	33.0	-7.8									
Mid Ch																
1.880	18.0	V	0.98	8.03	25.09	33.0	-7.9									
1.880	18.2	H	0.98	8.03	25.24	33.0	-7.8									
High Ch																
1.908	18.0	V	0.98	8.05	25.03	33.0	-8.0									
1.908	18.3	H	0.98	8.05	25.39	33.0	-7.6									
Rev. 05.21.15																

UMTS HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT only Mode: WCDMA HSDPA 1900MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	16.4	V	0.98	8.05	23.46	33.0	-9.5	
1.852	17.3	H	0.98	8.05	24.40	33.0	-8.6	
Mid Ch								
1.880	17.1	V	0.98	8.03	24.19	33.0	-8.8	
1.880	17.3	H	0.98	8.03	24.34	33.0	-8.7	
High Ch								
1.908	17.1	V	0.98	8.05	24.13	33.0	-8.9	
1.908	17.4	H	0.98	8.05	24.49	33.0	-8.5	

Rev. 05.21.15

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT only Mode: WCDMA Rel 99 1700MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	12.6	V	0.95	8.27	19.96	30.0	-10.0	
1.712	15.2	H	0.95	8.27	22.55	30.0	-7.5	
Mid Ch								
1.733	12.3	V	0.95	8.23	19.56	30.0	-10.4	
1.733	15.0	H	0.95	8.23	22.27	30.0	-7.7	
High Ch								
1.753	12.8	V	0.95	8.18	20.08	30.0	-9.9	
1.753	15.0	H	0.95	8.18	22.25	30.0	-7.7	
Rev. 05.21.15								

UMTS HSDPA, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
Company: Project #: 15U20163 Date: 06/26/15 Test Engineer: M. Hua Configuration: EUT only Mode: WCDMA HSDPA 1700MHz								
Test Equipment: Receiving: Horn T863 and Chamber H SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	11.8	V	0.95	8.27	19.16	30.0	-10.8	
1.712	14.3	H	0.95	8.27	21.65	30.0	-8.4	
Mid Ch								
1.733	11.4	V	0.95	8.23	18.66	30.0	-11.3	
1.733	14.1	H	0.95	8.23	21.37	30.0	-8.6	
High Ch								
1.753	11.9	V	0.95	8.18	19.18	30.0	-10.8	
1.753	14.1	H	0.95	8.18	21.35	30.0	-8.6	
Rev. 05.21.15								

10.4. RADIATED POWER (ERP & EIRP), MODEL: A1687 (UAT)

10.4.1. GSM

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	23.33	215.28
		190	836.6	23.26	211.84
		251	848.8	23.85	242.66
	EGPRS	128	824.2	19.23	83.75
		190	836.6	19.26	84.33
		251	848.8	19.35	86.10

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	27.16	520.00
		661	1880.0	27.29	535.80
		810	1909.8	27.14	517.61
	EGPRS	512	1850.2	24.36	272.90
		661	1880.0	24.69	294.44
		810	1909.8	25.14	326.59

10.4.2. CDMA2000

Part 90 800MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	14.11	25.76
		560	820.0	14.14	25.94
		670	822.8	14.22	26.42
	BC10, EVDO A	450	817.3	14.15	26.00
		560	820.0	14.16	26.06
		670	822.8	14.24	26.55

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	15.03	31.84
		384	836.5	15.46	35.16
		777	848.3	15.35	34.28
	BC 0, EVDO Rev A	1013	824.7	15.08	32.21
		384	836.5	15.50	35.48
		777	848.3	15.40	34.67

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	18.46	70.15
		600	1880.0	18.29	67.45
		1175	1908.8	18.14	65.16
	BC1, EVDO REV A	25	1851.3	18.50	70.79
		600	1880.0	18.32	67.92
		1175	1908.8	18.17	65.61

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	BC15, 1xRTT	25	1711.3	20.65	116.14
		450	1732.5	20.73	118.30
		875	1753.8	20.96	124.74
	BC15, EVDO, REV A	25	1711.3	20.60	114.82
		450	1732.5	20.69	117.22
		875	1753.8	20.95	124.45

10.4.3. UMTS

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	15.13	32.58
		4183	836.6	15.36	34.36
		4233	846.6	15.25	33.50
	UMTS, HSDPA	4132	826.4	14.23	26.49
		4183	836.6	14.46	27.93
		4233	846.6	14.35	27.23

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	18.46	70.15
		9800	1880.0	18.29	67.45
		9938	1907.6	18.23	66.53
	UMTS, HSDPA	9662	1852.4	17.56	57.02
		9800	1880.0	17.39	54.83
		9938	1907.6	17.43	55.34

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	20.95	124.45
		1638	1732.6	21.03	126.77
		1738	1752.5	20.86	121.90
	UMTS, HSDPA	1537	1712.4	20.05	101.16
		1638	1732.6	20.13	103.04
		1738	1752.5	20.01	100.23

GSM**GPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: GSM 850MHz										
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	24.0	V	0.6	0.0	23.33	25.48	38.45	40.60	-15.1	
824.20	6.1	H	0.6	0.0	5.45	7.60	38.45	40.60	-33.0	
Mid Ch										
836.60	23.9	V	0.6	0.0	23.26	25.41	38.45	40.60	-15.2	
836.60	7.1	H	0.6	0.0	6.46	8.61	38.45	40.60	-32.0	
High Ch										
848.80	24.5	V	0.6	0.0	23.85	26.00	38.45	40.60	-14.6	
848.80	8.4	H	0.6	0.0	7.78	9.93	38.45	40.60	-30.7	
Rev. 06.18.14										

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G																				
Company:																				
Project #:	15U20163																			
Date:	06/27/15																			
Test Engineer:	T Wang																			
Configuration:	EUT only																			
Mode:	EDGE 850MHz																			
Test Equipment:																				
Receiving: Sunol T899, and Chamber G Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	19.9	V	0.6	0.0	19.23	21.38	38.45	40.60	-19.2											
824.20	2.6	H	0.6	0.0	1.95	4.10	38.45	40.60	-36.5											
Mid Ch																				
836.60	19.9	V	0.6	0.0	19.26	21.41	38.45	40.60	-19.2											
836.60	4.0	H	0.6	0.0	3.36	5.51	38.45	40.60	-35.1											
High Ch																				
848.80	20.0	V	0.6	0.0	19.35	21.50	38.45	40.60	-19.1											
848.80	6.2	H	0.6	0.0	5.58	7.73	38.45	40.60	-32.9											
Rev. 06.18.14																				

GPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: GSM 1900MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.8502	18.7	V	0.98	8.05	25.81	33.0	-7.2	
1.8502	20.1	H	0.98	8.05	27.16	33.0	-5.8	
Mid Ch								
1.880	18.8	V	0.98	8.03	25.87	33.0	-7.1	
1.880	20.2	H	0.98	8.03	27.29	33.0	-5.7	
High Ch								
1.9098	18.9	V	0.98	8.05	25.97	33.0	-7.0	
1.9098	20.1	H	0.98	8.05	27.14	33.0	-5.9	
Rev. 06.18.14								

EGPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: EDGE 1900MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T60 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	16.2	V	0.98	8.05	23.31	33.0	-9.7	
1.851	17.3	H	0.98	8.05	24.36	33.0	-8.6	
Mid Ch								
1.880	15.9	V	0.98	8.03	22.97	33.0	-10.0	
1.880	17.6	H	0.98	8.03	24.69	33.0	-8.3	
High Ch								
1.910	16.8	V	0.98	8.05	23.87	33.0	-9.1	
1.910	18.1	H	0.98	8.05	25.14	33.0	-7.9	

Rev. 06.18.14

CDMA2000**CDMA2000 1xRTT, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA 1XRTT 800MHz								
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	14.73	V	0.6	0.0	14.11	50.00	-35.9	
817.25	1.33	H	0.6	0.0	0.71	50.00	-49.3	
Mid Ch								
820.00	14.76	V	0.6	0.0	14.14	50.00	-35.9	
820.00	1.63	H	0.6	0.0	1.01	50.00	-49.0	
High Ch								
822.75	14.84	V	0.6	0.0	14.22	50.00	-35.8	
822.75	2.18	H	0.6	0.0	1.56	50.00	-48.4	

Rev. 05.21.15

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company:								
Project #:	15U20163							
Date:	06/27/15							
Test Engineer:	T Wang							
Configuration:	EUT only							
Mode:	CDMA Rev A 800MHz							
Test Equipment:								
Receiving: Sunol T899, and Chamber G Cable								
Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	14.77	V	0.6	0.0	14.15	50.00	-35.8	
817.25	1.23	H	0.6	0.0	0.61	50.00	-49.4	
Mid Ch								
820.00	14.78	V	0.6	0.0	14.16	50.00	-35.8	
820.00	1.63	H	0.6	0.0	1.01	50.00	-49.0	
High Ch								
822.75	14.86	V	0.6	0.0	14.24	50.00	-35.8	
822.75	2.18	H	0.6	0.0	1.56	50.00	-48.4	
Rev. 05.21.15								

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber G																				
Company:																				
Project #:	15U20163																			
Date:	06/27/15																			
Test Engineer:	T Wang																			
Configuration:	EUT only																			
Mode:	CDMA 1XRTT 850MHz																			
Test Equipment:																				
Receiving: Sunol T899, and Chamber G Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.70	15.7	V	0.6	0.0	15.03	17.18	38.45	40.60	-23.4											
824.70	0.4	H	0.6	0.0	-0.25	1.90	38.45	40.60	-38.7											
Mid Ch																				
836.52	16.1	V	0.6	0.0	15.46	17.61	38.45	40.60	-23.0											
836.52	-0.4	H	0.6	0.0	-1.04	1.11	38.45	40.60	-39.5											
High Ch																				
848.31	16.0	V	0.6	0.0	15.35	17.50	38.45	40.60	-23.1											
848.31	-0.5	H	0.6	0.0	-1.12	1.03	38.45	40.60	-39.6											
Rev. 06.18.14																				

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA Rev A 850MHz										
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	15.7	V	0.6	0.0	15.08	17.23	38.45	40.60	-23.4	
824.70	0.3	H	0.6	0.0	-0.35	1.80	38.45	40.60	-38.8	
Mid Ch										
836.52	16.1	V	0.6	0.0	15.50	17.65	38.45	40.60	-22.9	
836.52	-0.5	H	0.6	0.0	-1.14	1.01	38.45	40.60	-39.6	
High Ch										
848.31	16.0	V	0.6	0.0	15.40	17.55	38.45	40.60	-23.0	
848.31	-0.4	H	0.6	0.0	-1.02	1.13	38.45	40.60	-39.5	
Rev. 06.18.14										

CDMA2000 1xRTT, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA 1XRTT 1900MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.8510	9.2	V	0.98	8.05	16.31	33.0	-16.7	
1.8510	11.4	H	0.98	8.05	18.46	33.0	-14.5	
Mid Ch								
1.880	9.3	V	0.98	8.03	16.37	33.0	-16.6	
1.880	11.2	H	0.98	8.03	18.29	33.0	-14.7	
High Ch								
1.9088	9.9	V	0.98	8.05	16.97	33.0	-16.0	
1.9088	11.1	H	0.98	8.05	18.14	33.0	-14.9	

Rev. 06.18.14

EVDO-Rev A, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA Rev A 1900MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	9.3	V	0.98	8.05	16.34	33.0	-16.7	
1.851	11.4	H	0.98	8.05	18.50	33.0	-14.5	
Mid Ch								
1.880	9.3	V	0.98	8.03	16.37	33.0	-16.6	
1.880	11.3	H	0.98	8.03	18.32	33.0	-14.7	
High Ch								
1.909	10.0	V	0.98	8.05	17.07	33.0	-15.9	
1.909	11.1	H	0.98	8.05	18.17	33.0	-14.8	
Rev. 05.21.15								

CDMA2000 1xRTT, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA 1XRTT 1700MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	12.3	V	0.95	8.27	19.62	30.0	-10.4	
1.711	13.3	H	0.95	8.27	20.65	30.0	-9.3	
Mid Ch								
1.733	12.4	V	0.95	8.23	19.63	30.0	-10.4	
1.733	13.5	H	0.95	8.23	20.73	30.0	-9.3	
High Ch								
1.754	12.1	V	0.95	8.18	19.31	30.0	-10.7	
1.754	13.7	H	0.95	8.18	20.96	30.0	-9.0	
Rev. 05.21.15								

EVDO-Rev A, 1700MHz BC15

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: CDMA Rev A 1700MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	12.3	V	0.95	8.27	19.60	30.0	-10.4	
1.711	13.3	H	0.95	8.27	20.60	30.0	-9.4	
Mid Ch								
1.733	12.3	V	0.95	8.23	19.58	30.0	-10.4	
1.733	13.4	H	0.95	8.23	20.69	30.0	-9.3	
High Ch								
1.754	12.0	V	0.95	8.18	19.25	30.0	-10.7	
1.754	13.7	H	0.95	8.18	20.95	30.0	-9.0	
Rev. 05.21.15								

UMTS**UMTS REL 99, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: WCDMA Rel 99 850MHz										
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	15.8	V	0.6	0.0	15.13	17.28	38.45	40.60	-23.3	
826.40	-2.7	H	0.6	0.0	-3.35	-1.20	38.45	40.60	-41.8	
Mid Ch										
836.60	16.0	V	0.6	0.0	15.36	17.51	38.45	40.60	-23.1	
836.60	-1.4	H	0.6	0.0	-2.04	0.11	38.45	40.60	-40.5	
High Ch										
846.60	15.9	V	0.6	0.0	15.25	17.40	38.45	40.60	-23.2	
846.60	-0.8	H	0.6	0.0	-1.42	0.73	38.45	40.60	-39.9	
Rev. 05.21.15										

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: WCDMA HSDPA 850MHz										
Test Equipment: Receiving: Sunol T899, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	14.9	V	0.6	0.0	14.23	16.38	38.45	40.60	-24.2	
826.40	-2.7	H	0.6	0.0	-3.35	-1.20	38.45	40.60	-41.8	
Mid Ch										
836.60	15.1	V	0.6	0.0	14.46	16.61	38.45	40.60	-24.0	
836.60	-1.5	H	0.6	0.0	-2.14	0.01	38.45	40.60	-40.6	
High Ch										
846.60	15.0	V	0.6	0.0	14.35	16.50	38.45	40.60	-24.1	
846.60	-0.9	H	0.6	0.0	-1.52	0.63	38.45	40.60	-40.0	
Rev. 05.21.15										

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: WCDMA Rel 99 1900MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	9.3	V	0.98	8.05	16.41	33.0	-16.6	
1.852	11.4	H	0.98	8.05	18.46	33.0	-14.5	
Mid Ch								
1.880	8.7	V	0.98	8.03	15.77	33.0	-17.2	
1.880	11.2	H	0.98	8.03	18.29	33.0	-14.7	
High Ch								
1.908	9.6	V	0.98	8.04	16.66	33.0	-16.3	
1.908	11.2	H	0.98	8.04	18.23	33.0	-14.8	
Rev. 05.21.15								

UMTS HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G															
Company:															
Project #:	15U20163														
Date:	06/27/15														
Test Engineer:	T Wang														
Configuration:	EUT only														
Mode:	WCDMA HSDPA 1900MHz														
Test Equipment:															
Receiving: Horn T862 and Chamber G SMA Cables															
Substitution: Horn T59 Substitution, and 8ft SMA Cable															
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes							
Low Ch															
1.8524	8.5	V	0.98	8.05	15.61	33.0	-17.4								
1.8524	10.5	H	0.98	8.05	17.56	33.0	-15.4								
Mid Ch															
1.880	7.8	V	0.98	8.03	14.87	33.0	-18.1								
1.880	10.3	H	0.98	8.03	17.39	33.0	-15.6								
High Ch															
1.9076	8.7	V	0.98	8.04	15.76	33.0	-17.2								
1.9076	10.4	H	0.98	8.04	17.43	33.0	-15.6								

Rev. 05.21.15

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 15U20163 Date: 06/27/15 Test Engineer: T Wang Configuration: EUT only Mode: WCDMA Rel 99 1700MHz								
Test Equipment: Receiving: Horn T862 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	12.4	V	0.95	8.27	19.72	30.0	-10.3	
1.712	13.6	H	0.95	8.27	20.95	30.0	-9.1	
Mid Ch								
1.733	13.0	V	0.95	8.23	20.23	30.0	-9.8	
1.733	13.8	H	0.95	8.23	21.03	30.0	-9.0	
High Ch								
1.753	12.5	V	0.95	8.18	19.71	30.0	-10.3	
1.753	13.6	H	0.95	8.18	20.86	30.0	-9.1	
Rev. 05.21.15								

UMTS HSDPA, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber G																
Company:																
Project #:	15U20163															
Date:	06/27/15															
Test Engineer:	T Wang															
Configuration:	EUT only															
Mode:	WCDMA HSDPA 1700MHz															
<u>Test Equipment:</u>																
Receiving: Horn T862 and Chamber G SMA Cables																
Substitution: Horn T59 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.7124	11.5	V	0.95	8.27	18.82	30.0	-11.2									
1.7124	12.7	H	0.95	8.27	20.05	30.0	-10.0									
Mid Ch																
1.7326	12.1	V	0.95	8.23	19.33	30.0	-10.7									
1.7326	12.9	H	0.95	8.23	20.13	30.0	-9.9									
High Ch																
1.7526	11.6	V	0.95	8.18	18.83	30.0	-11.2									
1.7526	12.8	H	0.95	8.18	20.01	30.0	-10.0									
Rev. 05.21.15																

10.5. PEAK-TO-AVERAGE RATIO (MODEL: A1634)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

Peak-To-Average Ratio:

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM850	GPRS	33.71	33.32	0.39
	EGPRS	32.27	28.87	3.4

*Peak Reading = Average Reading + Peak-to-Average Ratio

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM1900	GPRS	30.41	29.95	0.46
	EGPRS	31.33	27.9	3.43

*Peak Reading = Average Reading + Peak-to-Average Ratio

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC0	1xRTT	29.74	24.95	4.79
	EVDO A	30.2	24.98	5.22

*Peak Reading = Average Reading + Peak-to-Average Ratio

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC1	1xRTT	29.44	24.83	4.61
	EVDO A	28.82	24.9	3.92

*Peak Reading = Average Reading + Peak-to-Average Ratio

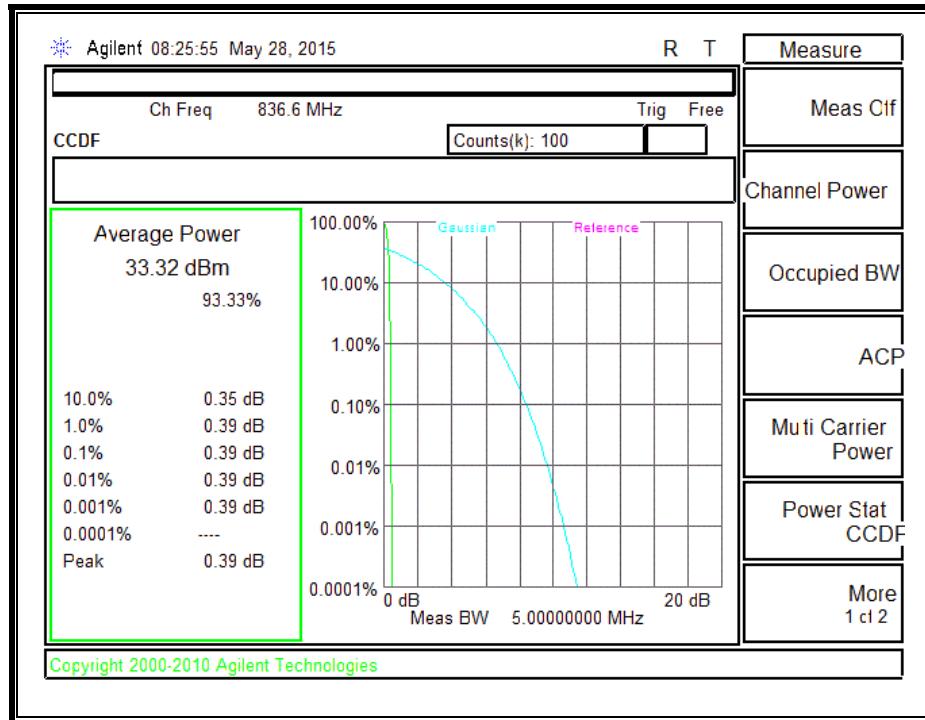
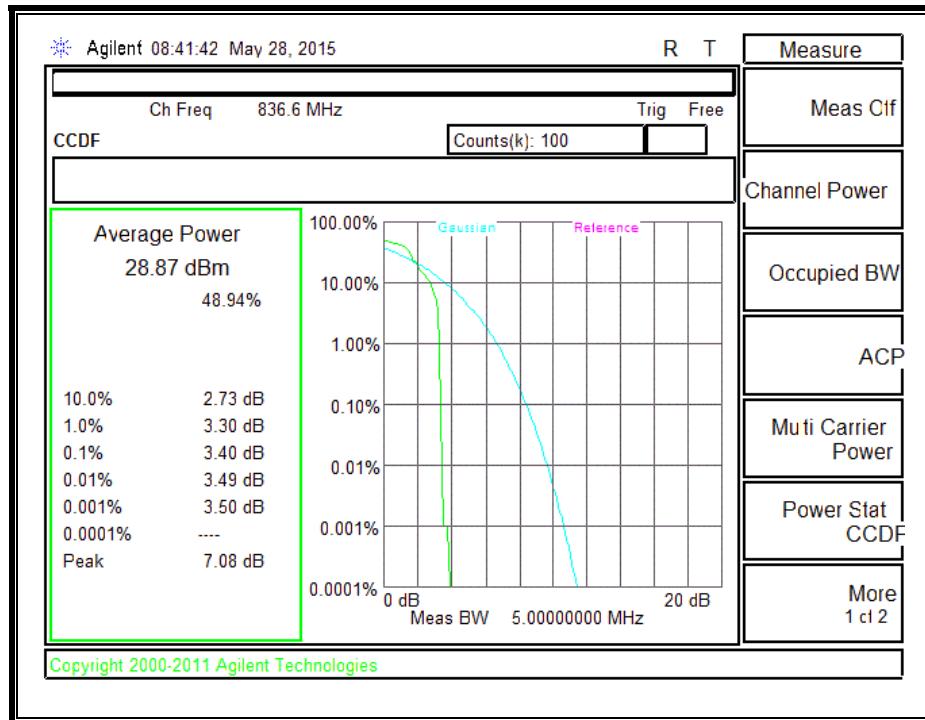
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC15	1xRTT	29.65	24.96	4.69
	EVDO A	30.22	24.99	5.23
*Peak Reading = Average Reading + Peak-to-Average Ratio				

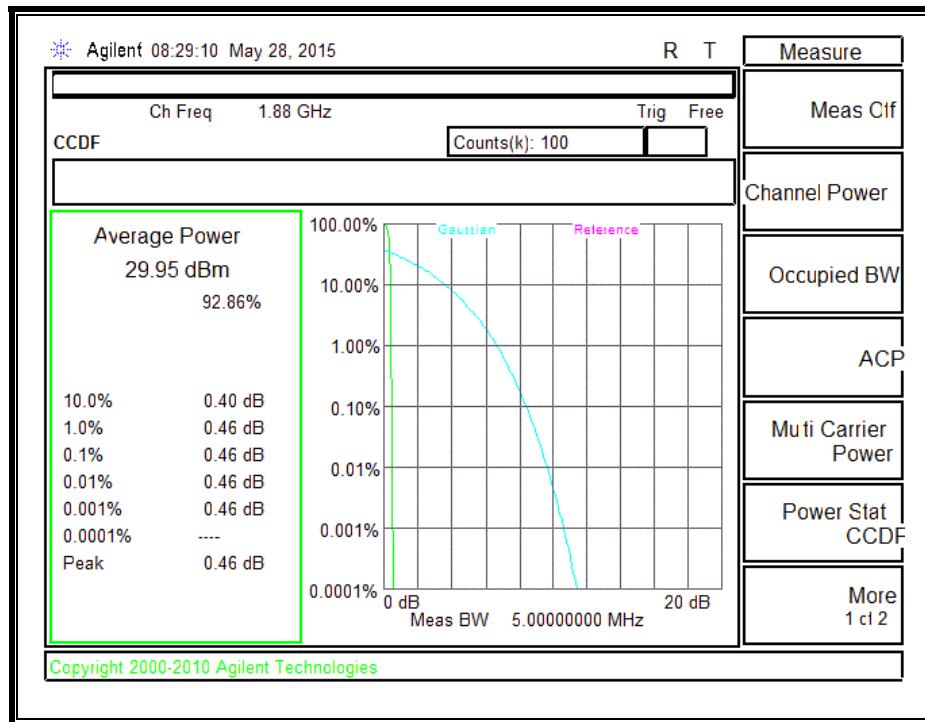
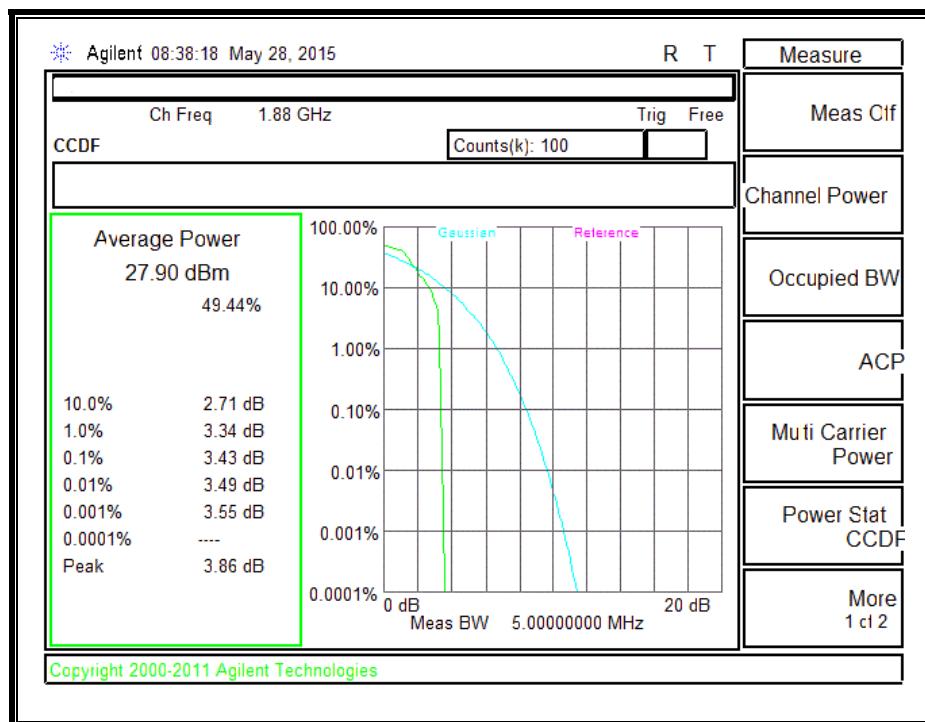
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC10	1xRTT	29.37	24.91	4.46
	EVDO A	30.62	24.99	5.63
*Peak Reading = Average Reading + Peak-to-Average Ratio				

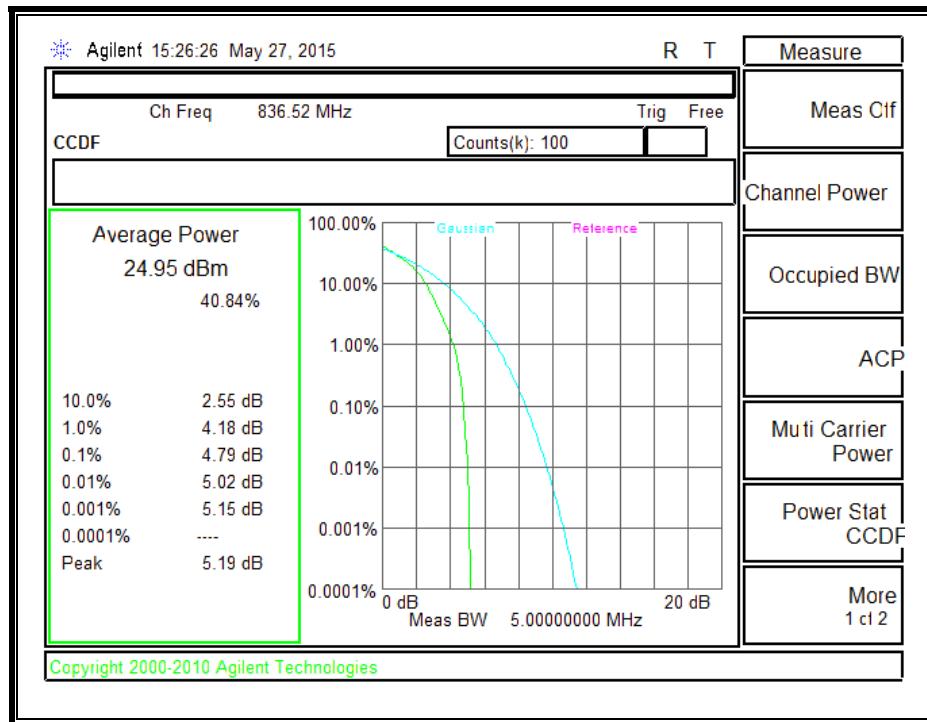
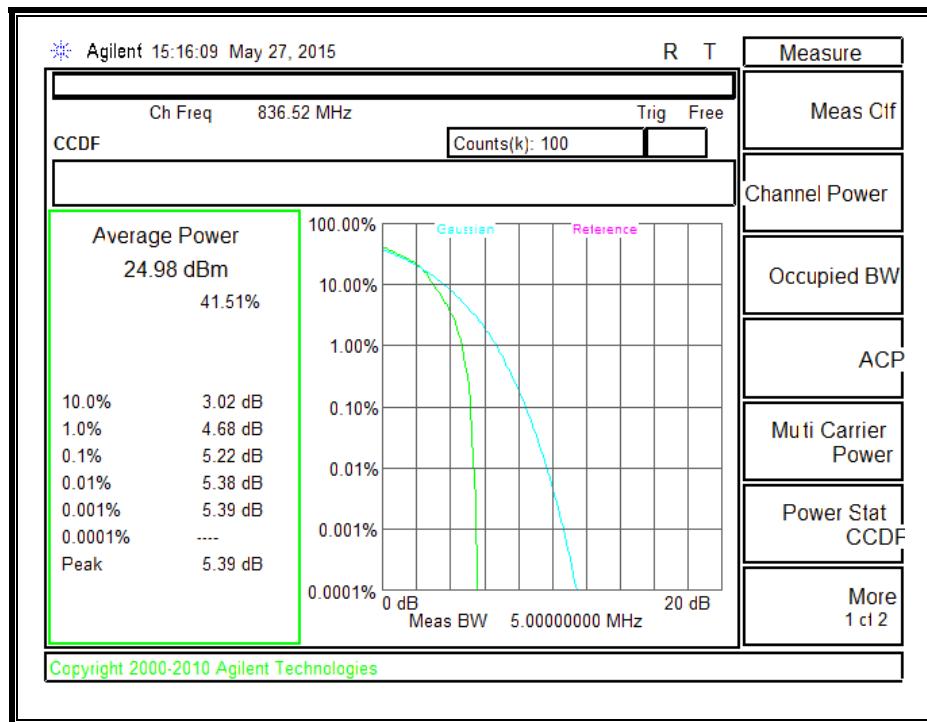
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 5	REL99	28.14	24.93	3.21
	HSDPA	27.67	23.94	3.73
*Peak Reading = Average Reading + Peak-to-Average Ratio				

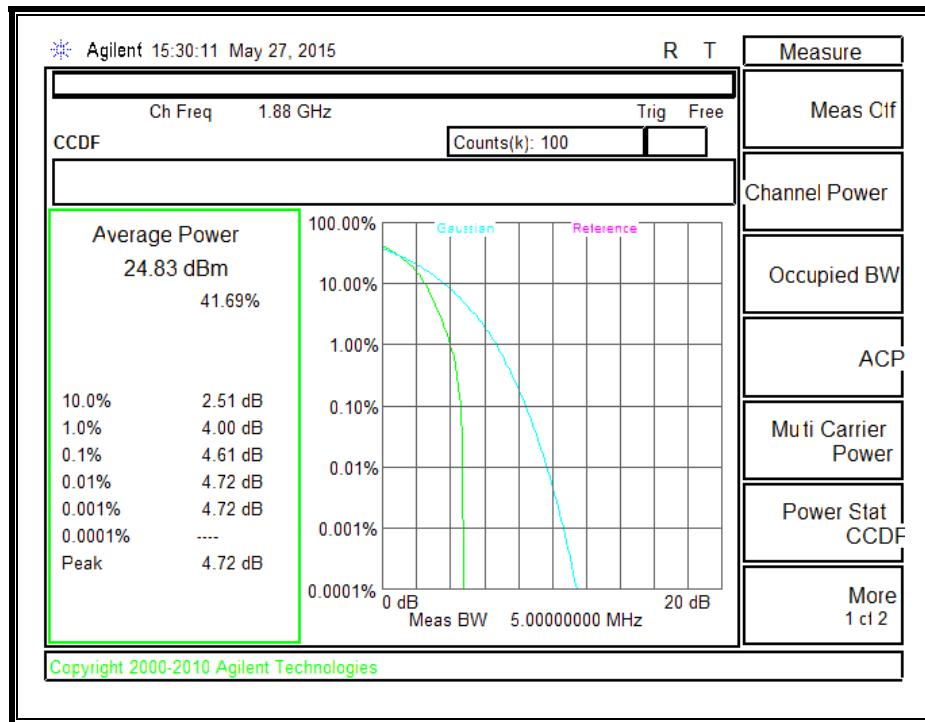
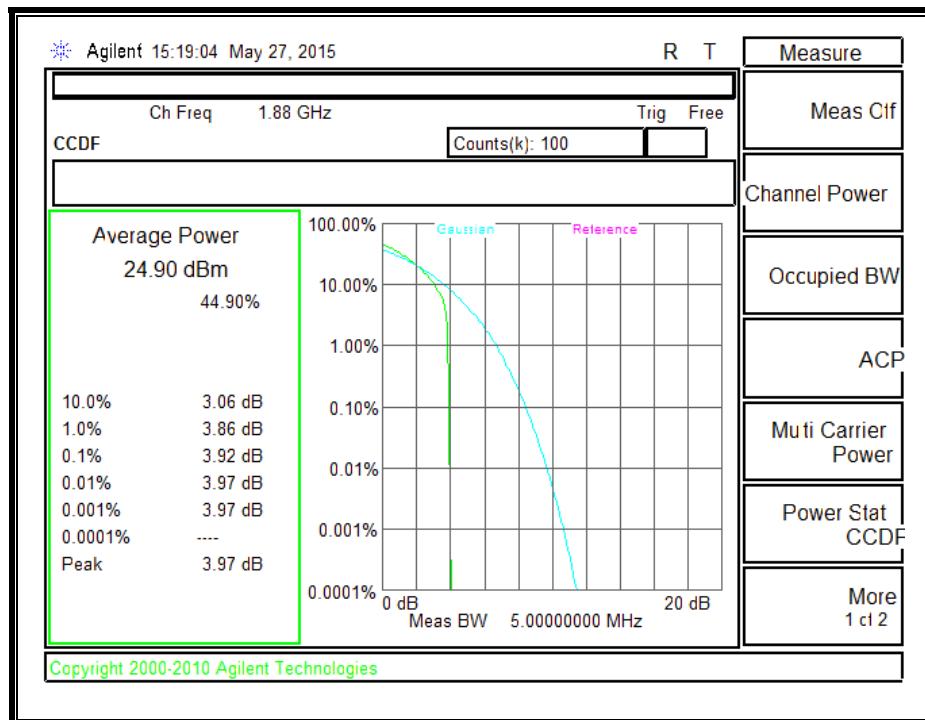
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 2	REL99	28.08	24.85	3.23
	HSDPA	27.62	23.86	3.76
*Peak Reading = Average Reading + Peak-to-Average Ratio				

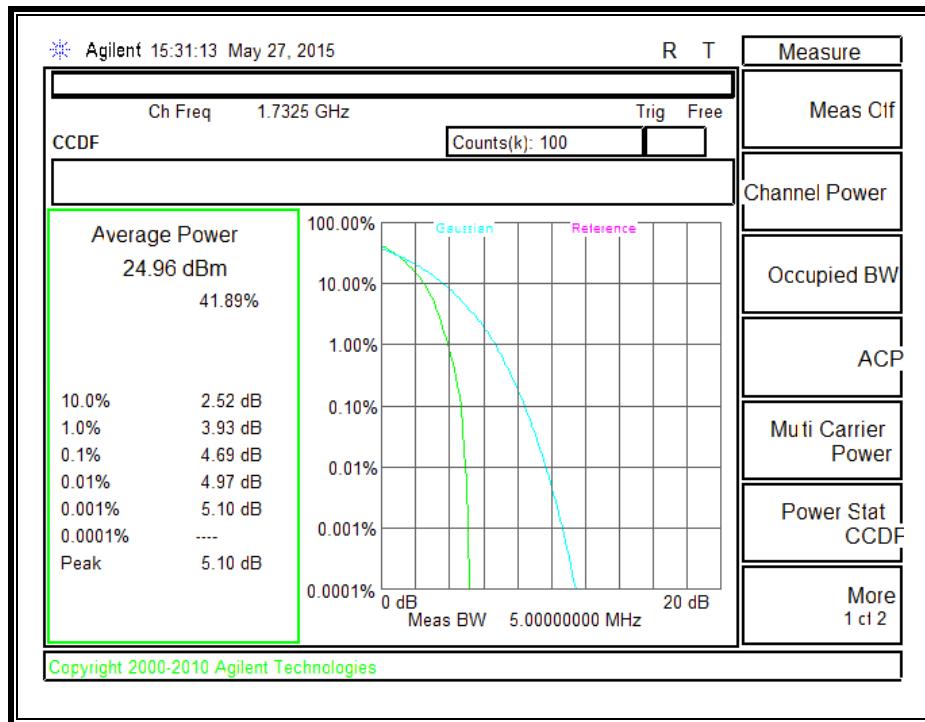
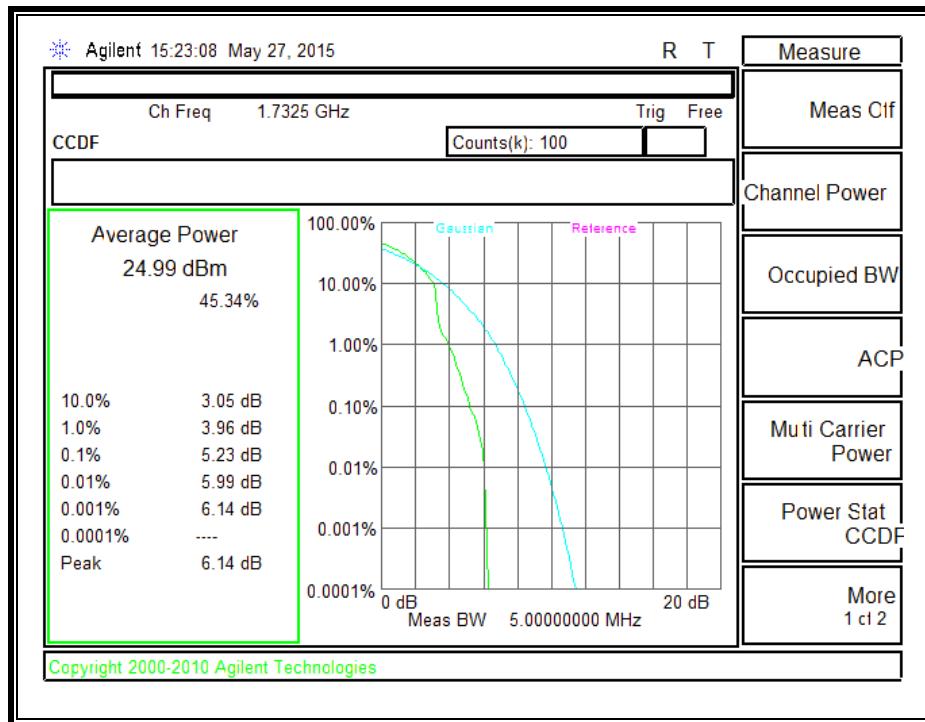
Mode	Modulation	Coudacted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 4	REL99	27.75	24.99	2.76
	HSDPA	27.64	23.96	3.68
*Peak Reading = Average Reading + Peak-to-Average Ratio				

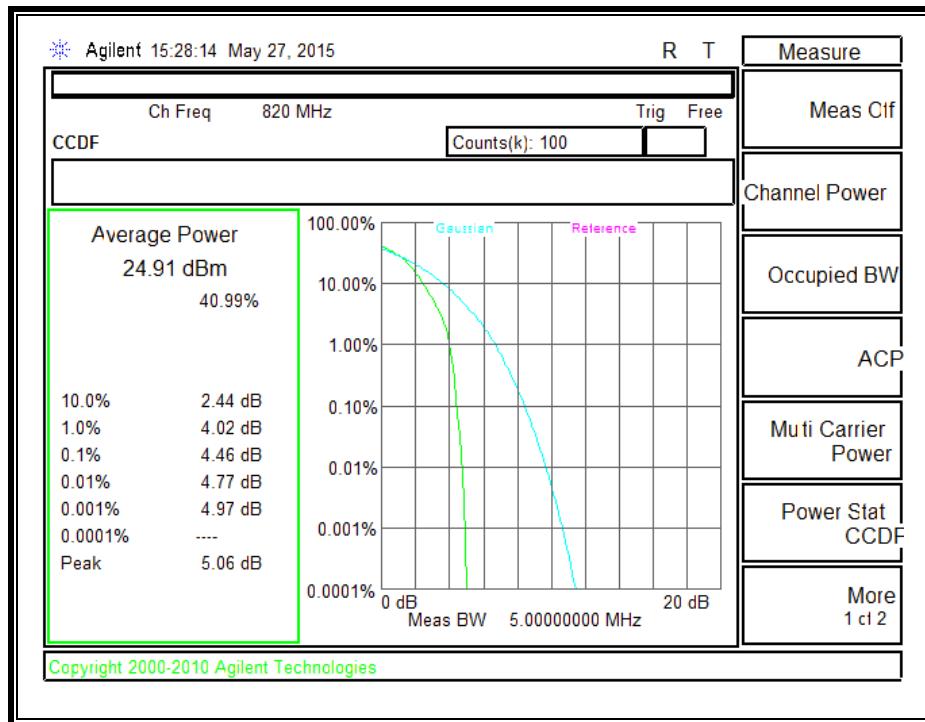
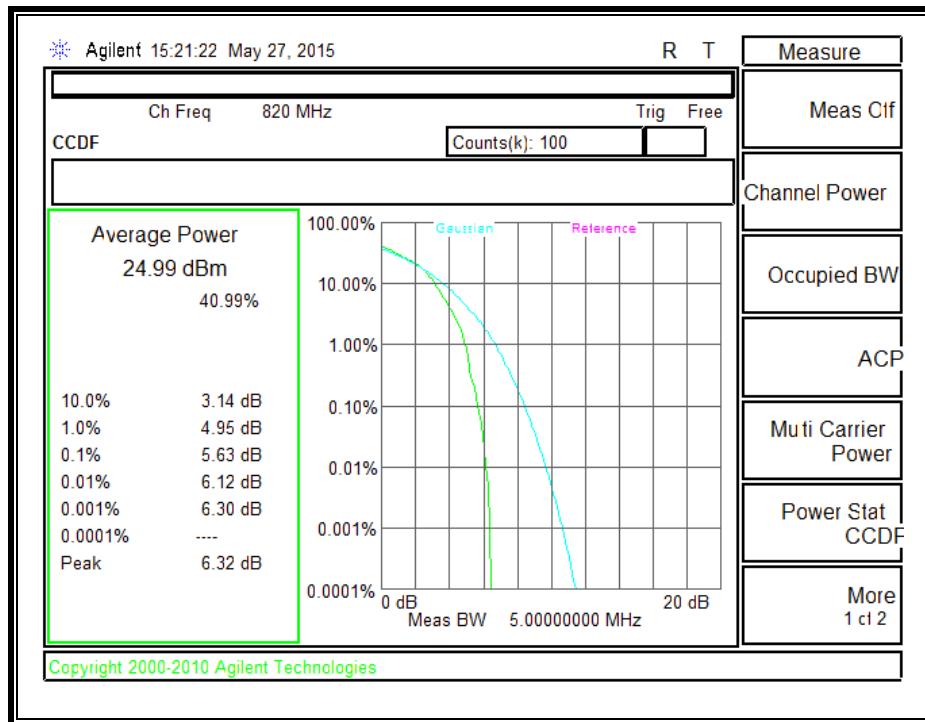
GSM850, GPRS**GSM850, EGPRS**

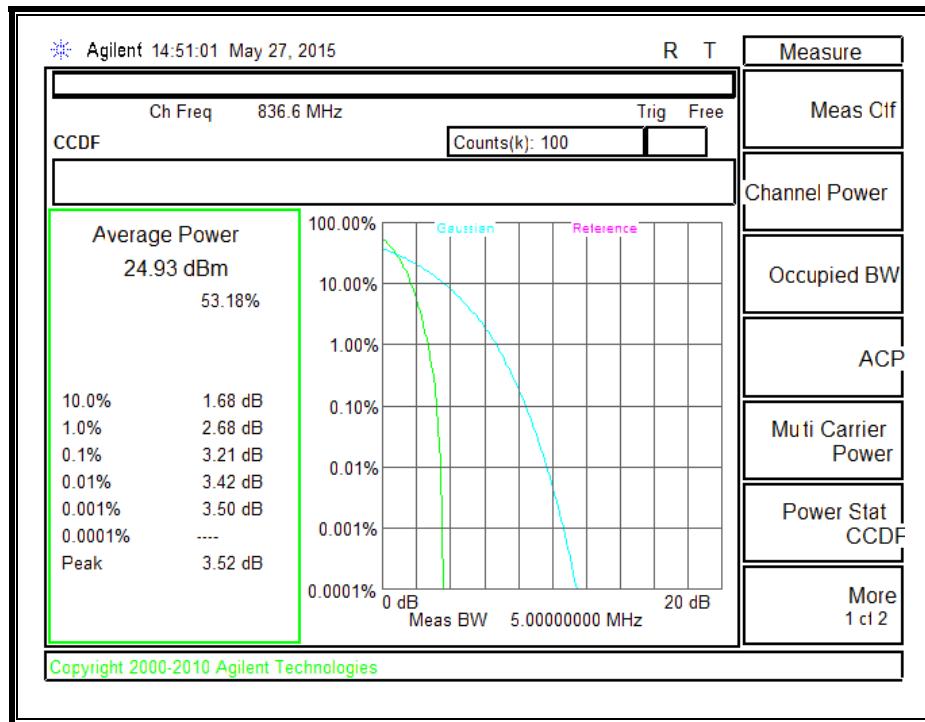
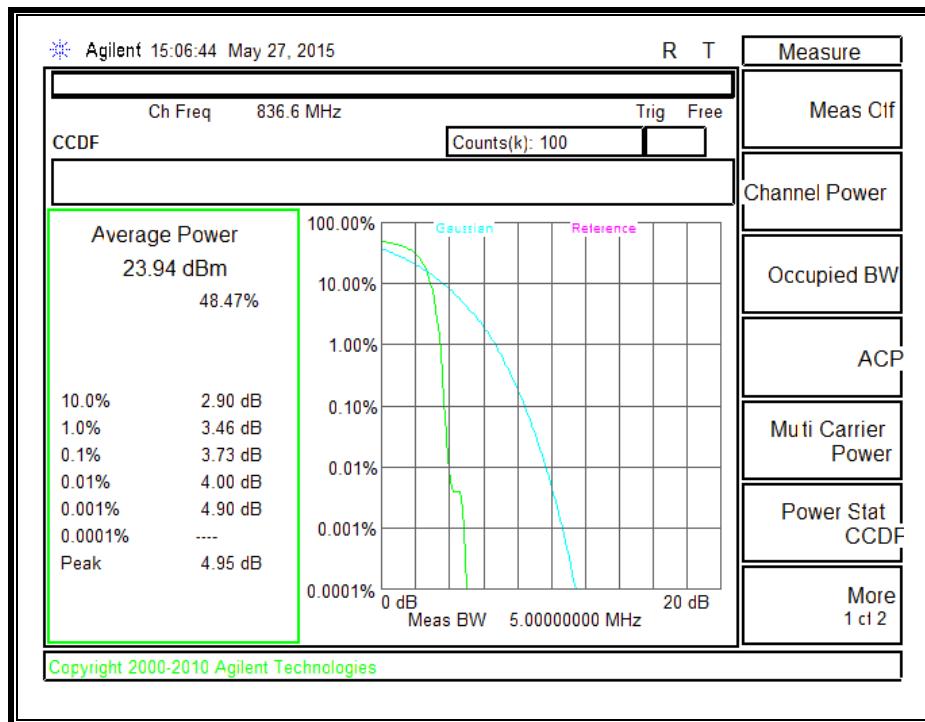
GSM1900, GPRS**GSM1900, EGPRS**

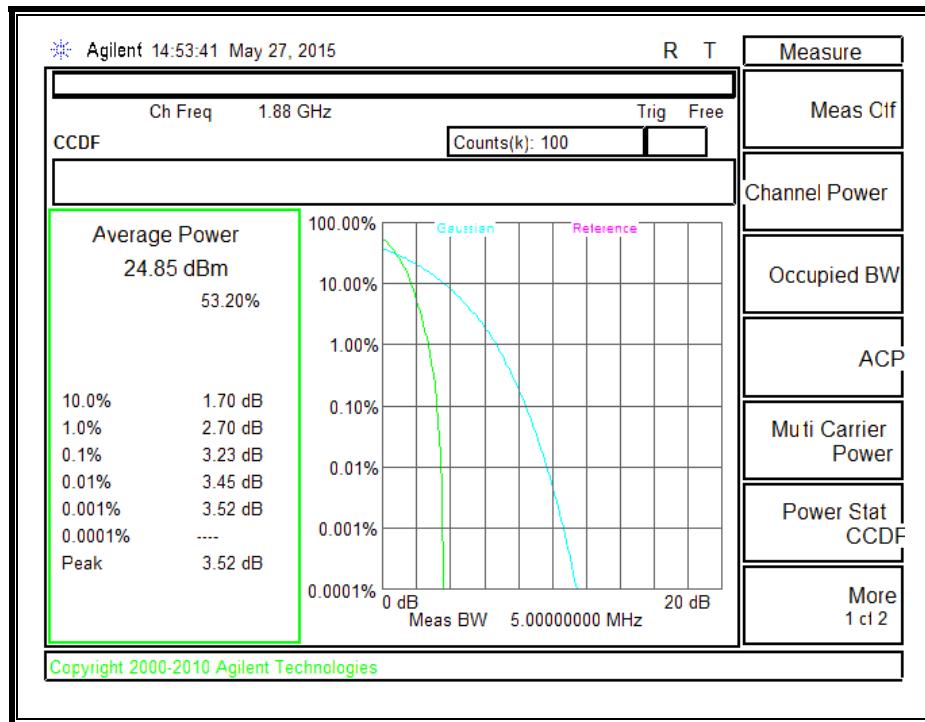
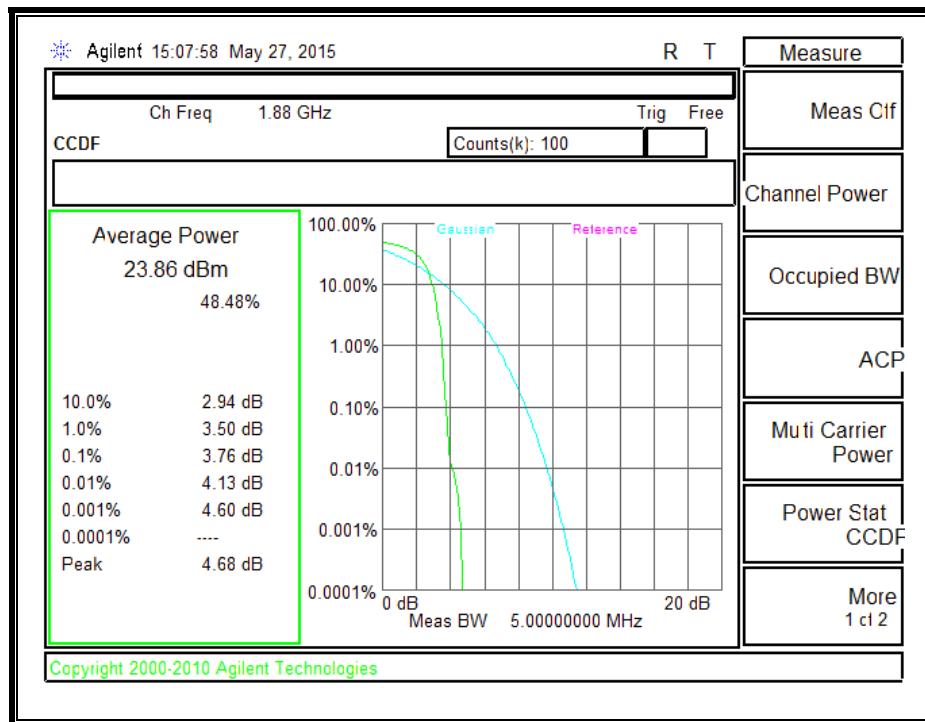
BC 0, 1xRTT**BC 0, EVDO A**

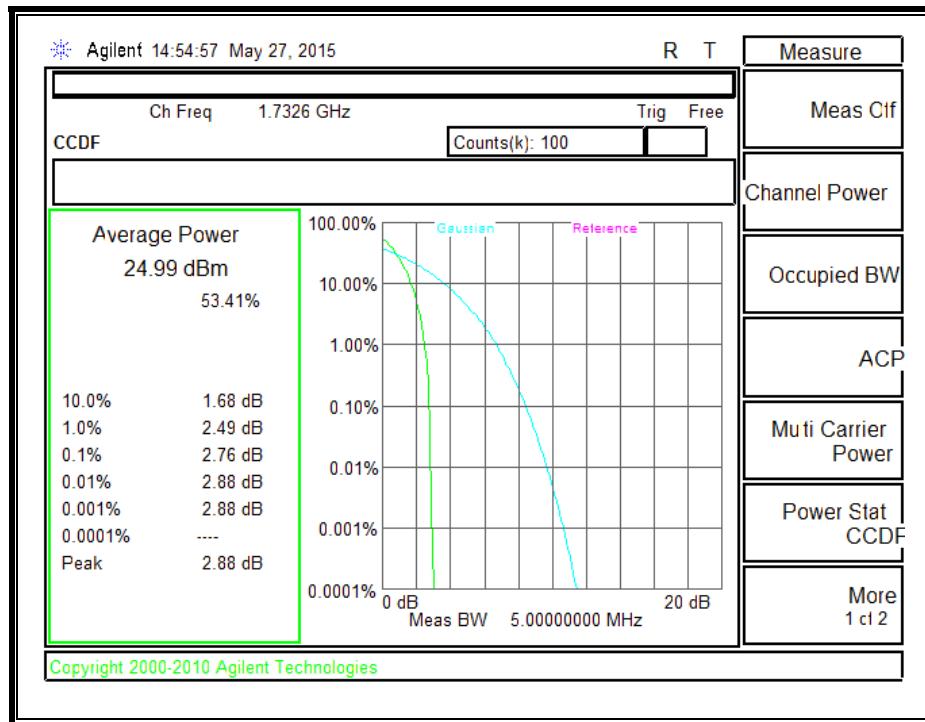
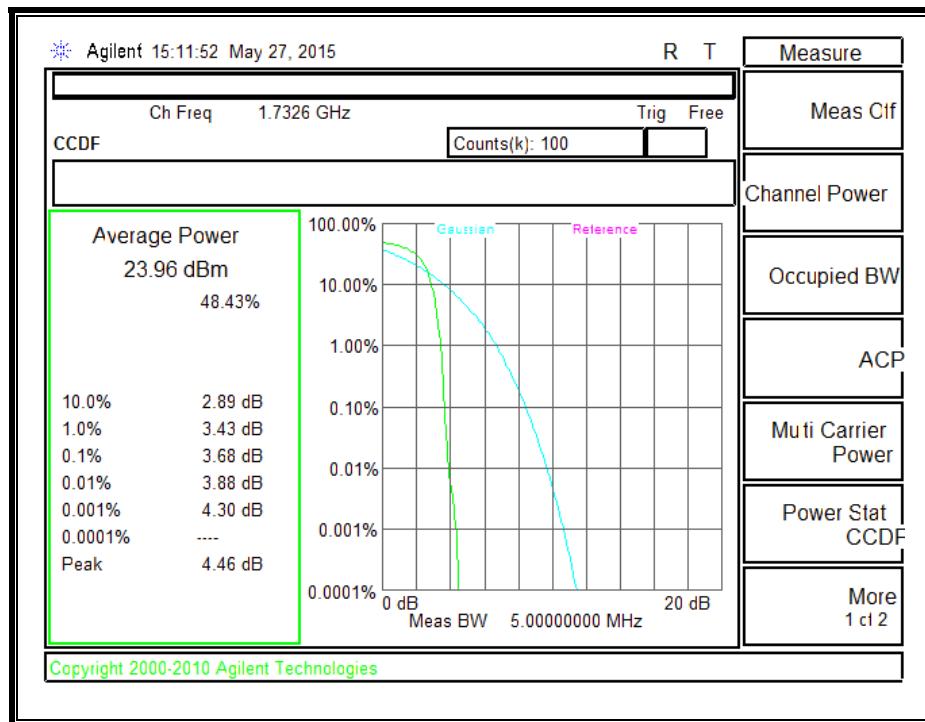
BC 1, 1xRTT**BC 1, EVDO A**

BC15, 1xRTT**BC15, EVDO A**

BC10, 1xRTT**BC10, EVDO A**

UMTS850, REL 99 BAND 5UMTS 850, HSDPA BAND 5

UMTS 1900, REL99 BAND 2UMTS 1900, HSDPA BAND 2

UMTS 1700, REL99 BAND 4UMTS 1700, HSDPA BAND 4

10.6. PEAK-TO-AVERAGE RATIO (MODEL: A1687)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

Peak-To-Average Ratio:

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM850	GPRS	33.66	33.42	0.24
	EGPRS	32.41	28.83	3.58

*Peak Reading = Average Reading + Peak-to-Average Ratio

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM1900	GPRS	30.19	29.94	0.25
	EGPRS	31.32	27.93	3.39

*Peak Reading = Average Reading + Peak-to-Average Ratio

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC0	1xRTT	29.78	24.93	4.85
	EVDO A	30.68	24.98	5.7

*Peak Reading = Average Reading + Peak-to-Average Ratio

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC1	1xRTT	29.15	24.86	4.29
	EVDO A	29.15	24.9	4.25

*Peak Reading = Average Reading + Peak-to-Average Ratio

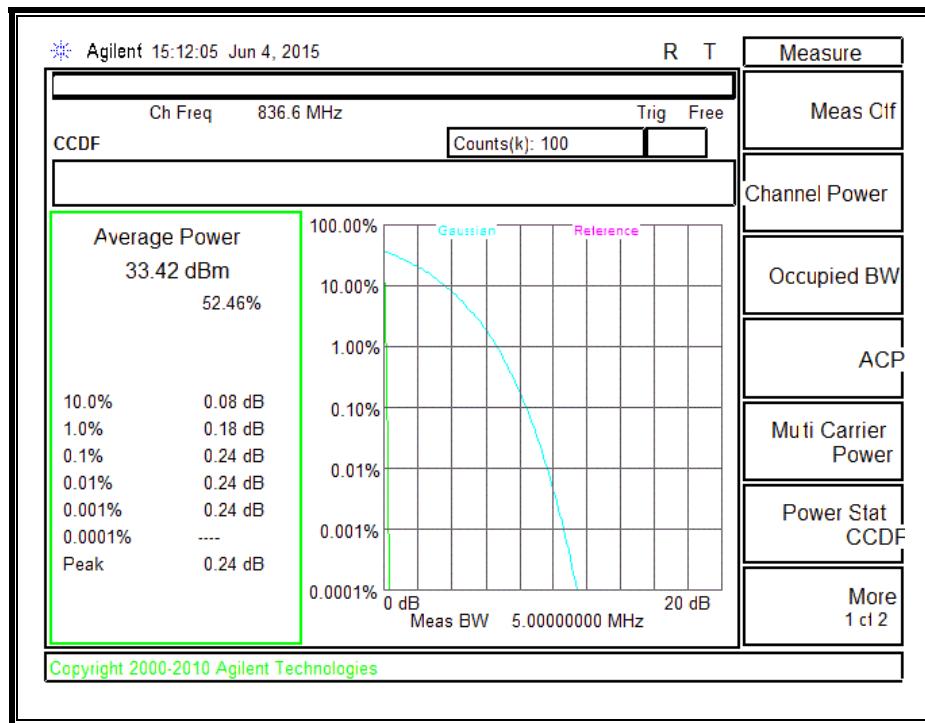
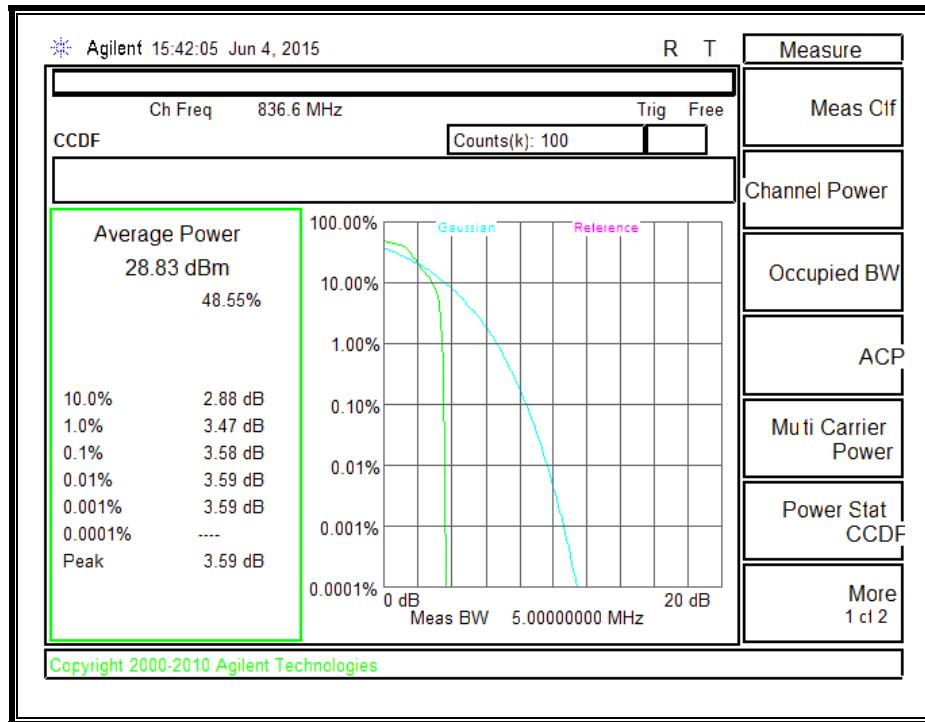
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC15	1xRTT	29.52	24.92	4.6
	EVDO A	28.91	24.93	3.98
*Peak Reading = Average Reading + Peak-to-Average Ratio				

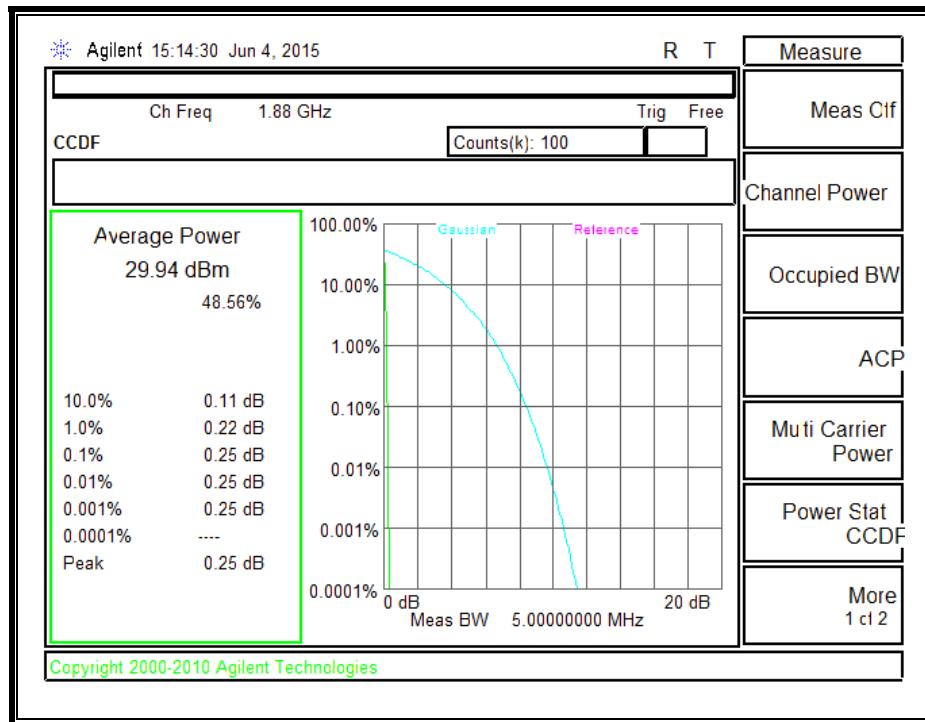
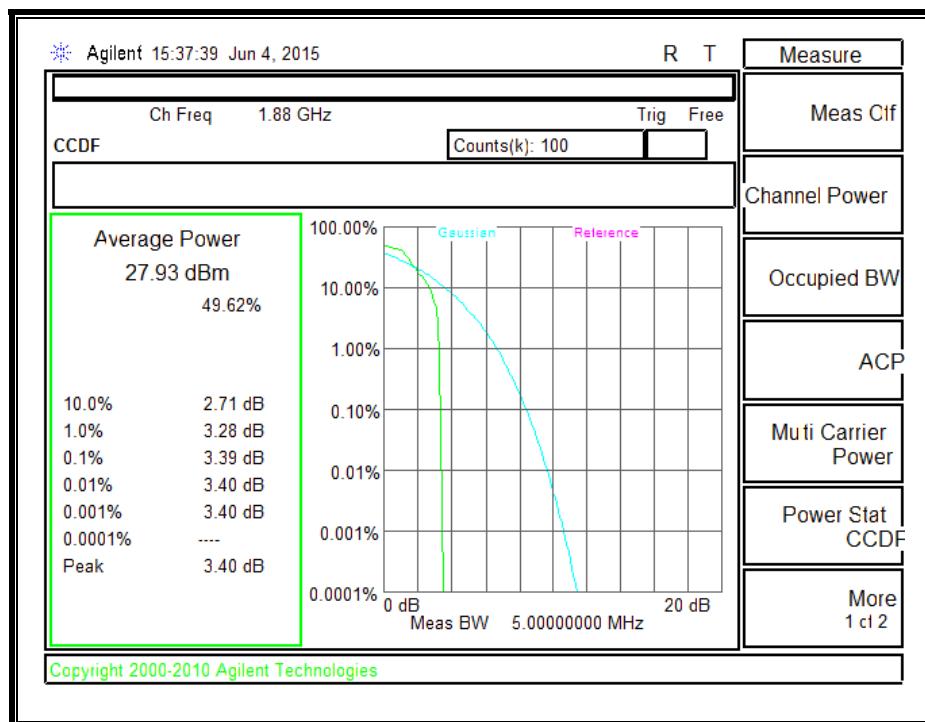
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC10	1xRTT	29.66	24.93	4.73
	EVDO A	30.79	24.92	5.87
*Peak Reading = Average Reading + Peak-to-Average Ratio				

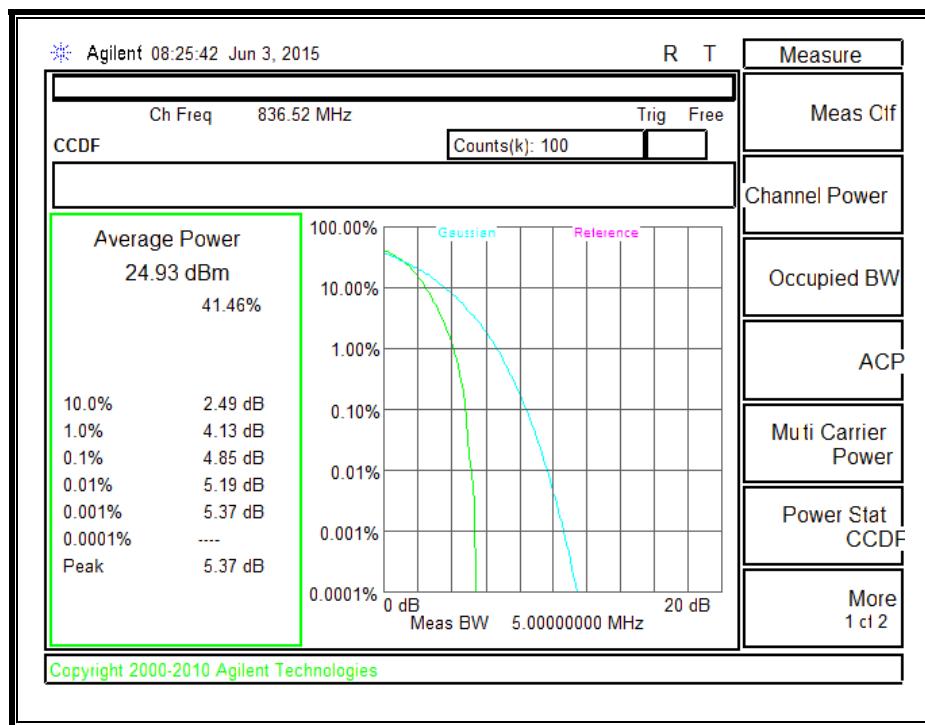
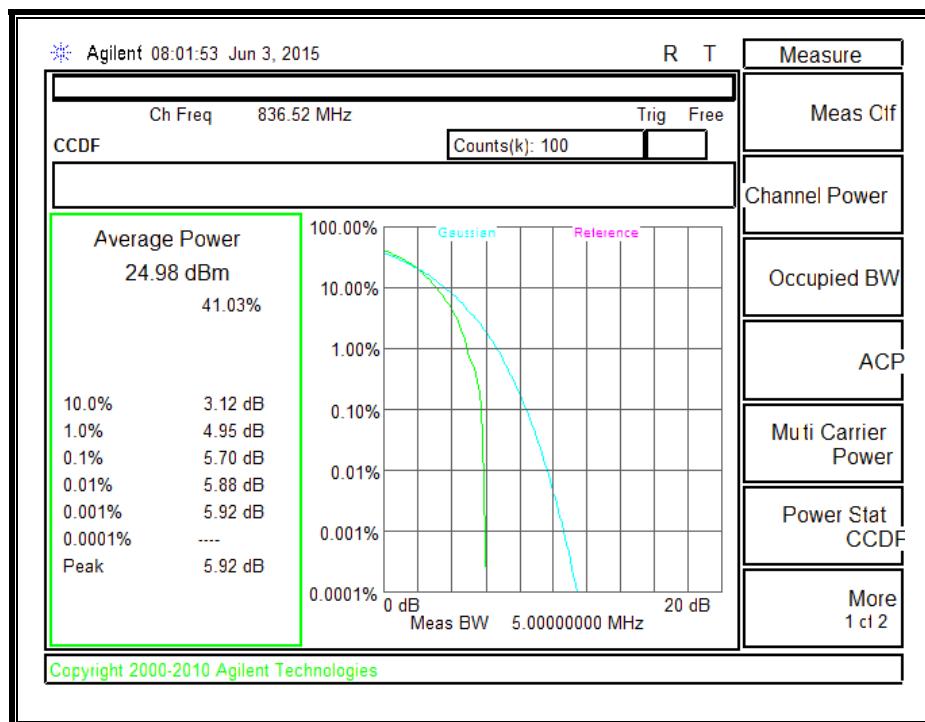
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 5	REL99	28.21	24.93	3.28
	HSDPA	27.27	24.1	3.17
*Peak Reading = Average Reading + Peak-to-Average Ratio				

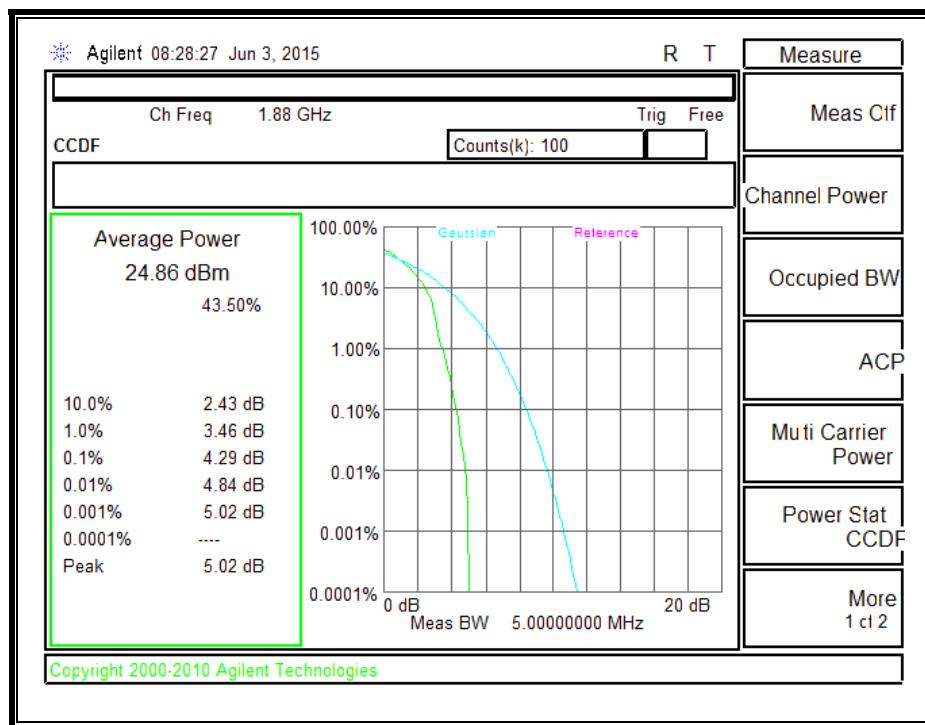
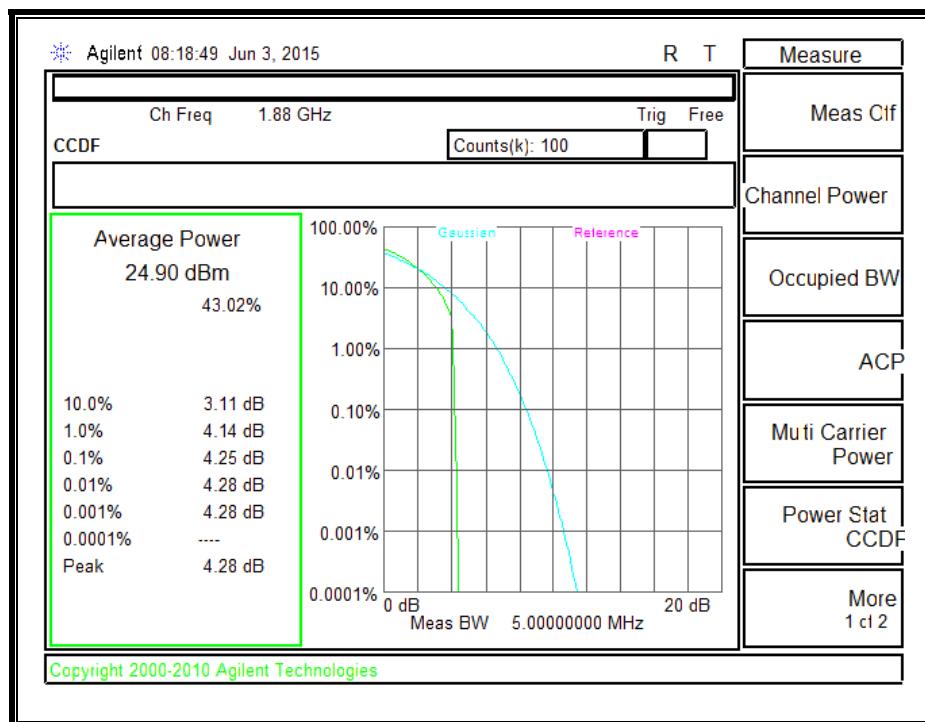
Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 2	REL99	28.18	24.98	3.2
	HSDPA	27.67	23.92	3.75
*Peak Reading = Average Reading + Peak-to-Average Ratio				

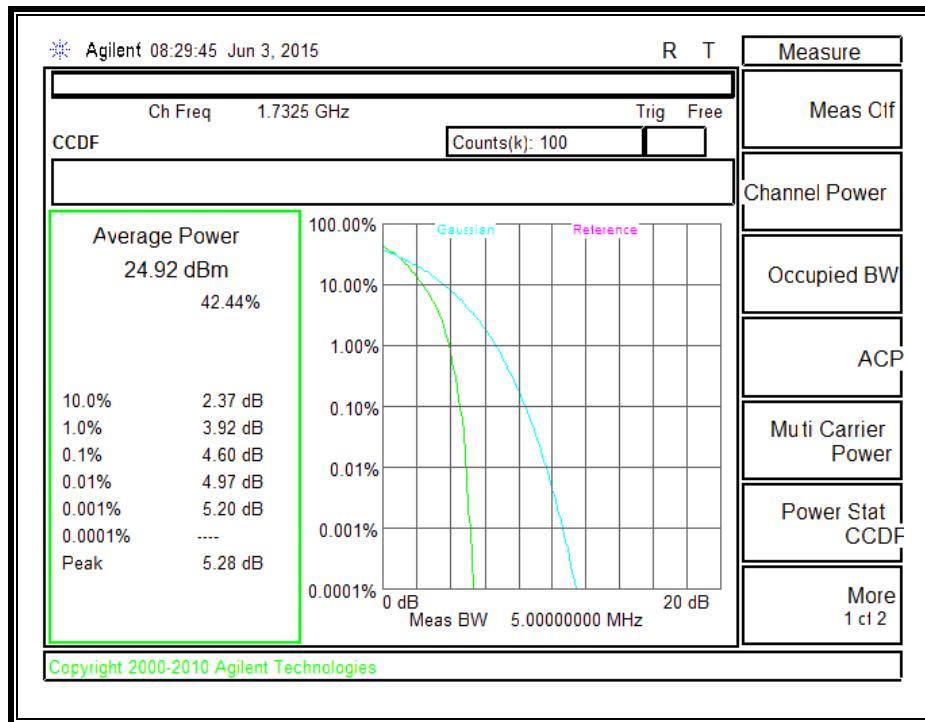
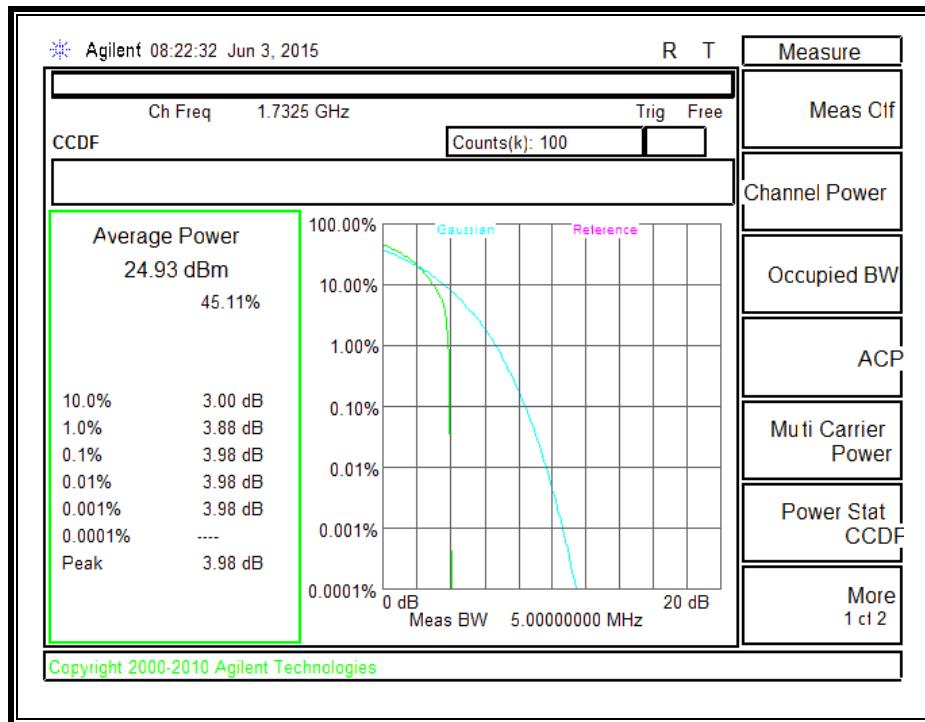
Mode	Modulation	Coudacted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 4	REL99	28.05	24.97	3.08
	HSDPA	26.88	23.99	2.89
*Peak Reading = Average Reading + Peak-to-Average Ratio				

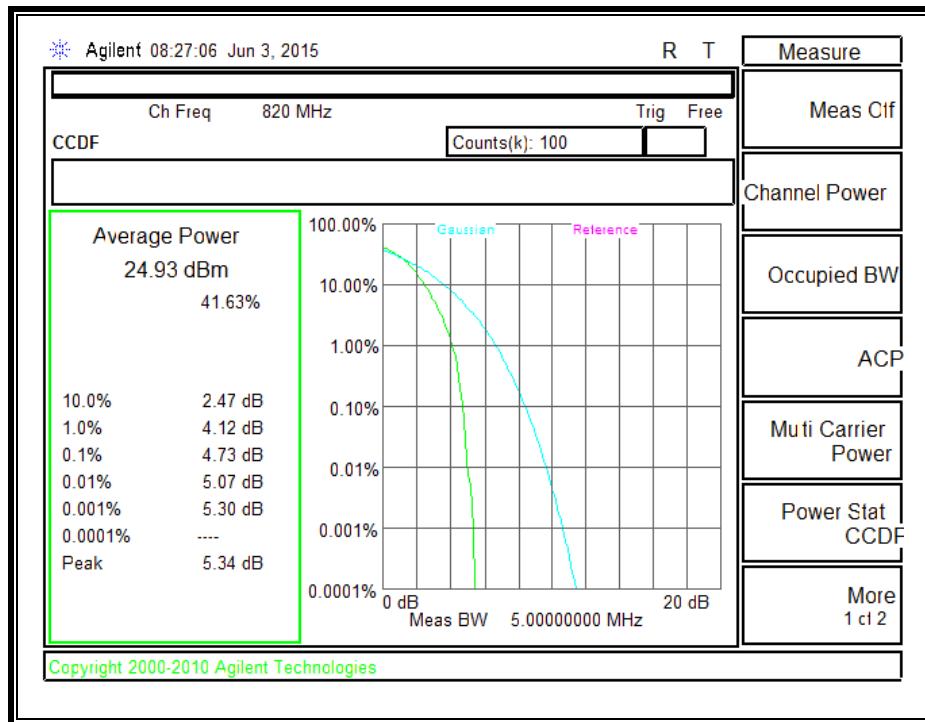
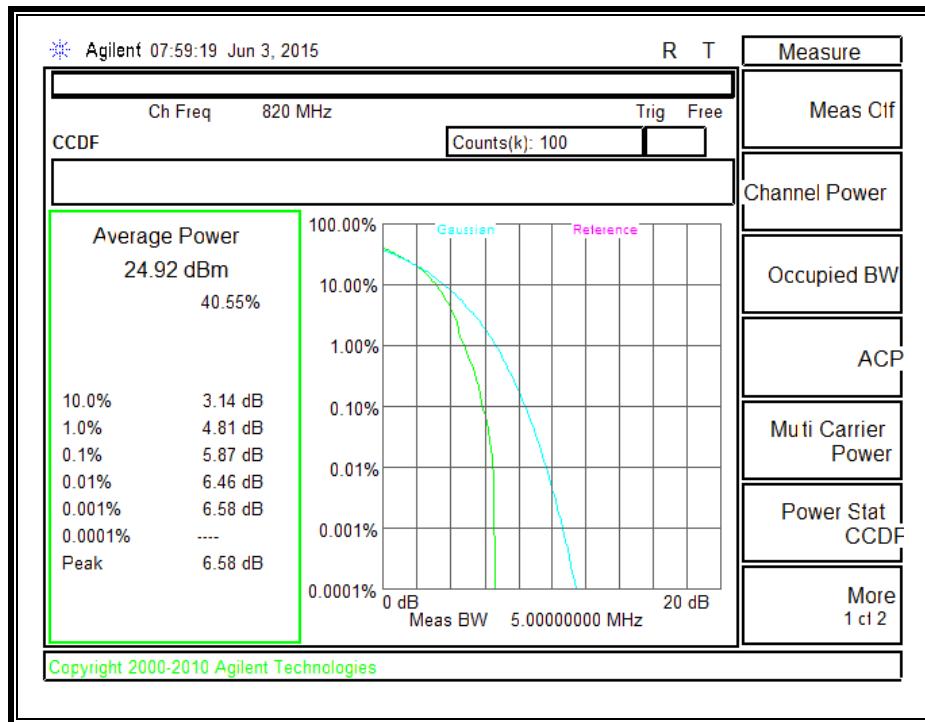
GSM850, GPRS**GSM850, EGPRS**

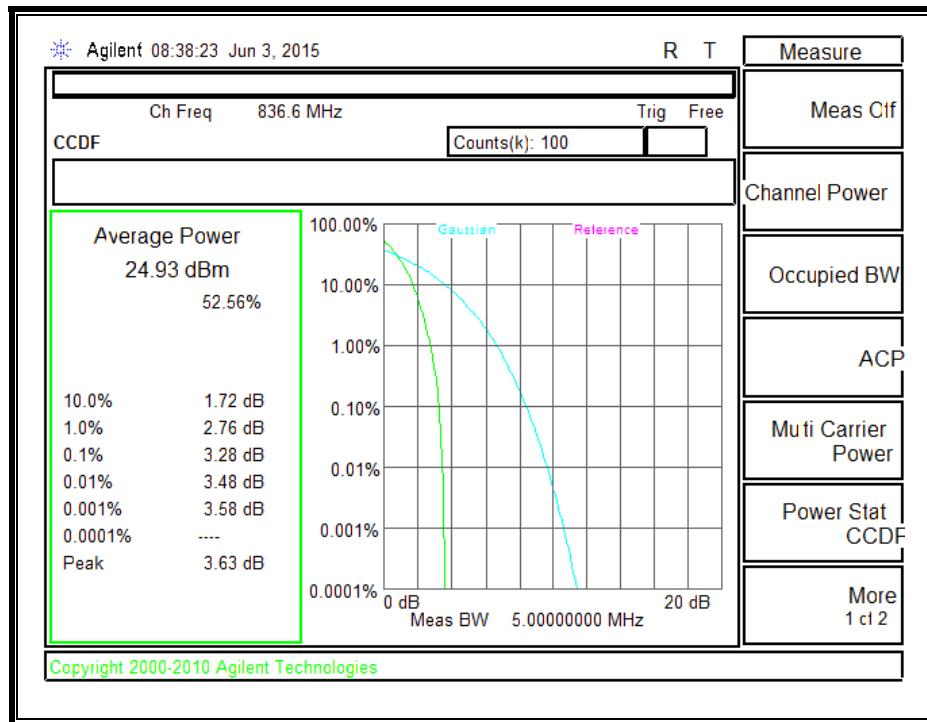
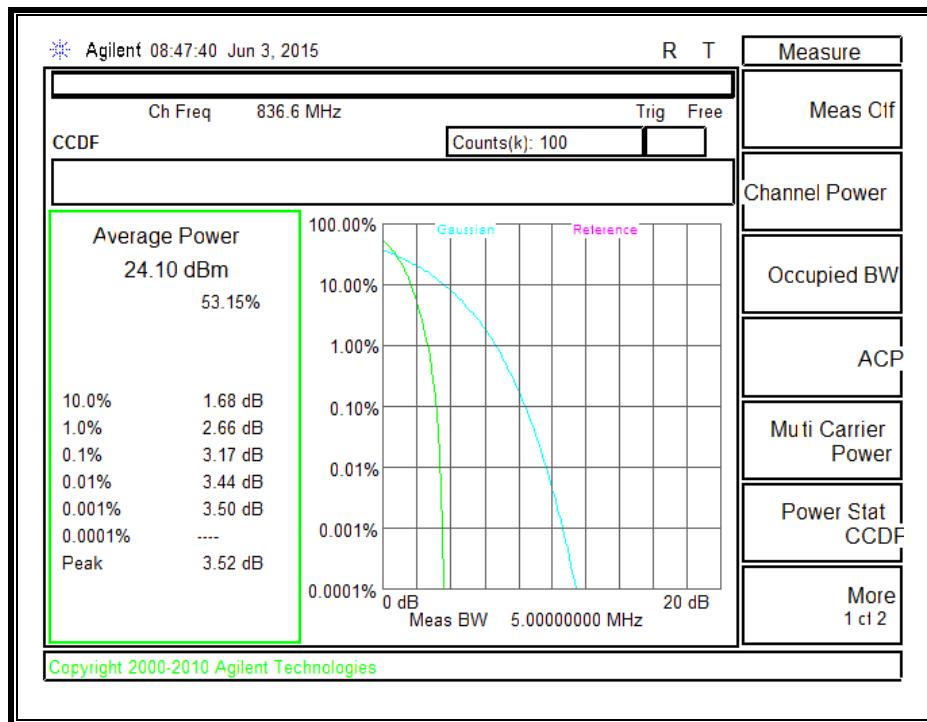
GSM1900, GPRS**GSM1900, EGPRS**

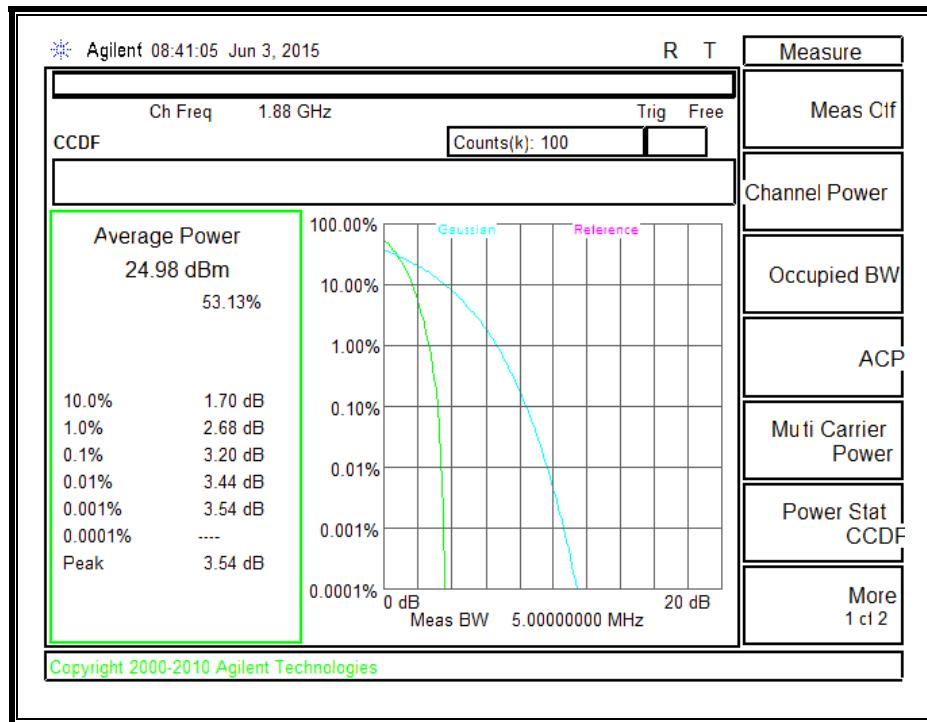
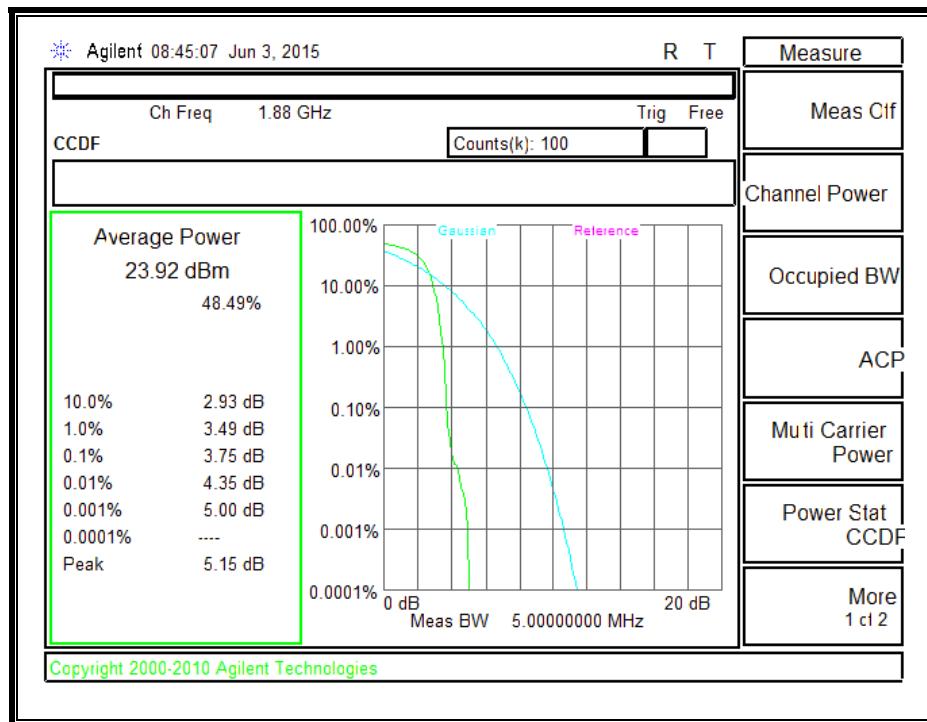
BC 0, 1xRTT**BC 0, EVDO A**

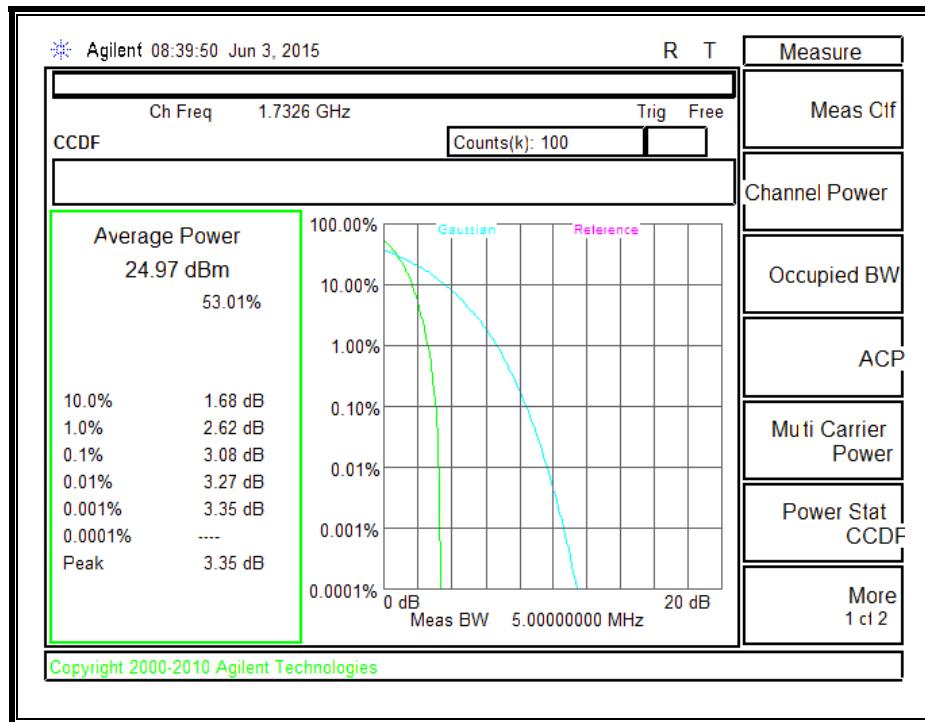
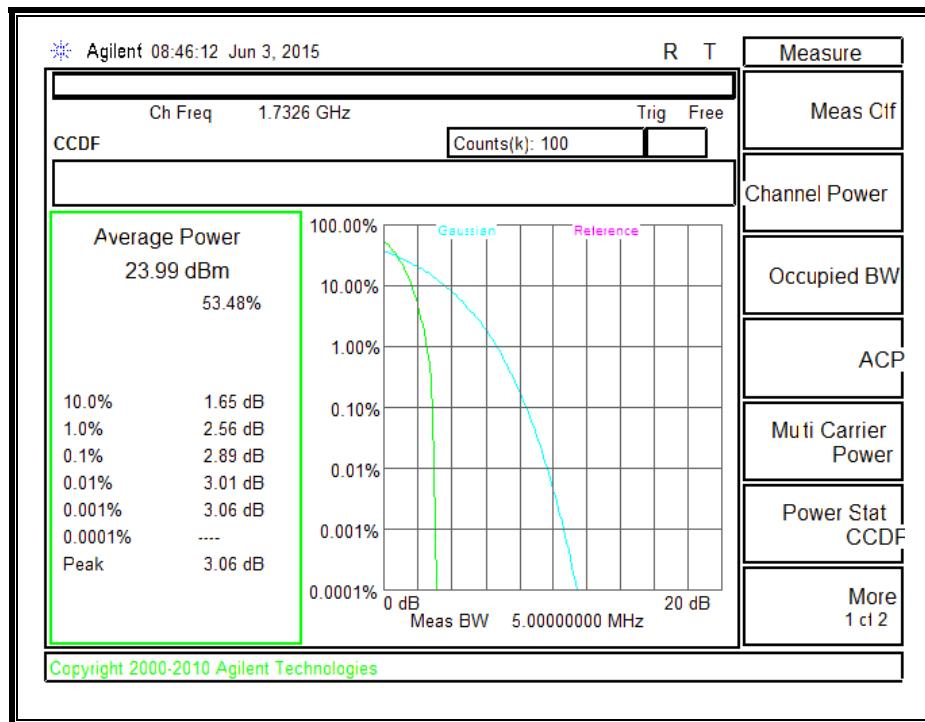
BC 1, 1xRTT**BC 1, EVDO A**

BC15, 1xRTT**BC15, EVDO A**

BC10, 1xRTT**BC10, EVDO A**

UMTS850, REL 99 BAND 5UMTS 850, HSDPA BAND 5

UMTS 1900, REL99 BAND 2**UMTS 1900, HSDPA BAND 2**

UMTS 1700, REL99 BAND 4**UMTS 1700, HSDPA BAND 4**

10.7. FIELD STRENGTH OF SPURIOUS RADIATION, MODEL: A1634 (LAT)

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691.

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB

§90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10} (f/6.1)$ decibels or $50 + 10 \log_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least

one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve

measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

- GPRS/EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO Rev A

RESULTS

10.7.1. GSM

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 15U20162 Date: 05/11/15 Test Engineer: T. Pham Configuration: EUT Only Mode: GPRS 850MHz										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	Path Loss @ SG End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)										
1.65	-50.2	H	3.0	-8.4	35.0	1.0	-42.5	-13.0	-29.5	
2.47	-58.7	H	3.0	-14.6	33.9	1.0	-47.5	-13.0	-34.5	
3.30	-65.7	H	3.0	-19.0	33.2	1.0	-51.2	-13.0	-38.2	
1.65	-46.8	V	3.0	-4.9	35.0	1.0	-38.9	-13.0	-25.9	
2.47	-53.7	V	3.0	-9.3	33.9	1.0	-42.2	-13.0	-29.2	
3.30	-65.9	V	3.0	-19.1	33.2	1.0	-51.3	-13.0	-38.3	
Mid Channel (836.6MHz)										
1.67	-51.2	H	3.0	-9.3	35.0	1.0	-43.4	-13.0	-30.4	
2.51	-60.9	H	3.0	-16.6	33.7	1.0	-49.3	-13.0	-36.3	
3.35	-64.6	H	3.0	-17.7	33.3	1.0	-49.9	-13.0	-36.9	
1.67	-44.0	V	3.0	-2.0	35.0	1.0	-36.0	-13.0	-23.0	
2.51	-56.1	V	3.0	-11.6	33.7	1.0	-44.3	-13.0	-31.3	
3.35	-65.9	V	3.0	-18.9	33.3	1.0	-51.2	-13.0	-38.2	
High Channel (848.8MHz)										
1.70	-55.9	H	3.0	-13.9	35.0	1.0	-48.0	-13.0	-35.0	
2.55	-49.8	H	3.0	-5.4	33.7	1.0	-38.1	-13.0	-25.1	
3.40	-66.7	H	3.0	-19.7	33.3	1.0	-52.0	-13.0	-39.0	
1.70	-47.0	V	3.0	-4.9	35.0	1.0	-38.9	-13.0	-25.9	
2.55	-51.0	V	3.0	-6.4	33.7	1.0	-39.1	-13.0	-26.1	
3.40	-65.3	V	3.0	-18.2	33.3	1.0	-50.5	-13.0	-37.5	
Rev. 03.19.15										

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company:										
Project #:	15U20162									
Date:	05/11/15									
Test Engineer:	T. Pham									
Configuration:	EUT Only									
Mode:	EGPRS 850MHz									
Test Equipment:										
Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber D		3m Chamber D		Filter		ERP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	Path Loss @ SG End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)										
1.65	-50.5	H	3.0	-8.7	35.0	1.0	-42.7	-13.0	-29.7	
2.47	-47.1	H	3.0	-3.0	33.9	1.0	-35.9	-13.0	-22.9	
3.30	-65.2	H	3.0	-18.5	33.2	1.0	-50.7	-13.0	-37.7	
1.65	-42.1	V	3.0	-0.1	35.0	1.0	-34.2	-13.0	-21.2	
2.47	-51.0	V	3.0	-6.6	33.9	1.0	-39.6	-13.0	-26.6	
3.30	-66.2	V	3.0	-19.4	33.2	1.0	-51.6	-13.0	-38.6	
Mid Channel (836.6MHz)										
1.67	-50.5	H	3.0	-8.6	35.0	1.0	-42.7	-13.0	-29.7	
2.51	-58.0	H	3.0	-13.7	33.7	1.0	-46.4	-13.0	-33.4	
3.35	-66.5	H	3.0	-19.5	33.3	1.0	-51.8	-13.0	-38.8	
1.67	-41.7	V	3.0	0.4	35.0	1.0	-33.7	-13.0	-20.7	
2.51	-52.1	V	3.0	-7.6	33.7	1.0	-40.4	-13.0	-27.4	
3.35	-66.9	V	3.0	-19.9	33.3	1.0	-52.1	-13.0	-39.1	
High Channel (848.8MHz)										
1.70	-52.4	H	3.0	-10.5	35.0	1.0	-44.5	-13.0	-31.5	
2.55	-62.5	H	3.0	-18.0	33.7	1.0	-50.7	-13.0	-37.7	
3.40	-65.4	H	3.0	-18.3	33.3	1.0	-50.6	-13.0	-37.6	
1.70	-42.2	V	3.0	-0.1	35.0	1.0	-34.1	-13.0	-21.1	
2.55	-51.1	V	3.0	-6.5	33.7	1.0	-39.2	-13.0	-26.2	
3.40	-66.3	V	3.0	-19.2	33.3	1.0	-51.5	-13.0	-38.5	
Rev. 03.19.15										

GRPS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber																			
Company:																			
Project #:		15U20162																	
Date:		05/09/15																	
Test Engineer:		T. Pham																	
Configuration:		EUT Only																	
Mode:		GPRS 1900MHz																	
<u>Test Equipment:</u>																			
Substitution: Horn T59 Substitution, and 8ft SMA Cable																			
Chamber			Pre-amplifier			Filter			Limit										
3m Chamber D			3m Chamber D			Filter			EIRP										
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	Path Loss @ SG End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes									
Low Channel (1850.2MHz)																			
3.70	-65.2	H	3.0	-17.3	33.5	1.0	-49.8	-13.0	-36.8										
5.55	-64.9	H	3.0	-13.6	32.5	1.0	-45.1	-13.0	-32.1										
7.40	-67.5	H	3.0	-13.1	30.4	1.0	-42.5	-13.0	-29.5										
3.70	-65.7	V	3.0	-17.8	33.5	1.0	-50.3	-13.0	-37.3										
5.55	-66.7	V	3.0	-15.7	32.5	1.0	-47.1	-13.0	-34.1										
7.40	-66.4	V	3.0	-11.9	30.4	1.0	-41.3	-13.0	-28.3										
Mid Channel (1880.0)																			
3.76	-64.8	H	3.0	-16.7	33.5	1.0	-49.2	-13.0	-36.2										
5.64	-67.8	H	3.0	-16.3	32.4	1.0	-47.7	-13.0	-34.7										
7.52	-68.9	H	3.0	-14.4	30.3	1.0	-43.7	-13.0	-30.7										
3.76	-64.8	V	3.0	-16.7	33.5	1.0	-49.2	-13.0	-36.2										
5.64	-68.6	V	3.0	-17.4	32.4	1.0	-48.8	-13.0	-35.8										
7.52	-67.4	V	3.0	-12.8	30.3	1.0	-42.0	-13.0	-29.0										
High Channel (1909.8MHz)																			
3.82	-65.0	H	3.0	-16.7	33.6	1.0	-49.3	-13.0	-36.3										
5.73	-66.4	H	3.0	-14.8	32.3	1.0	-46.1	-13.0	-33.1										
7.64	-68.4	H	3.0	-13.8	30.1	1.0	-42.9	-13.0	-29.9										
3.82	-65.2	V	3.0	-17.0	33.6	1.0	-49.6	-13.0	-36.6										
5.73	-66.0	V	3.0	-14.6	32.3	1.0	-45.9	-13.0	-32.9										
7.64	-68.4	V	3.0	-13.6	30.1	1.0	-42.7	-13.0	-29.7										

Rev. 03.19.15