
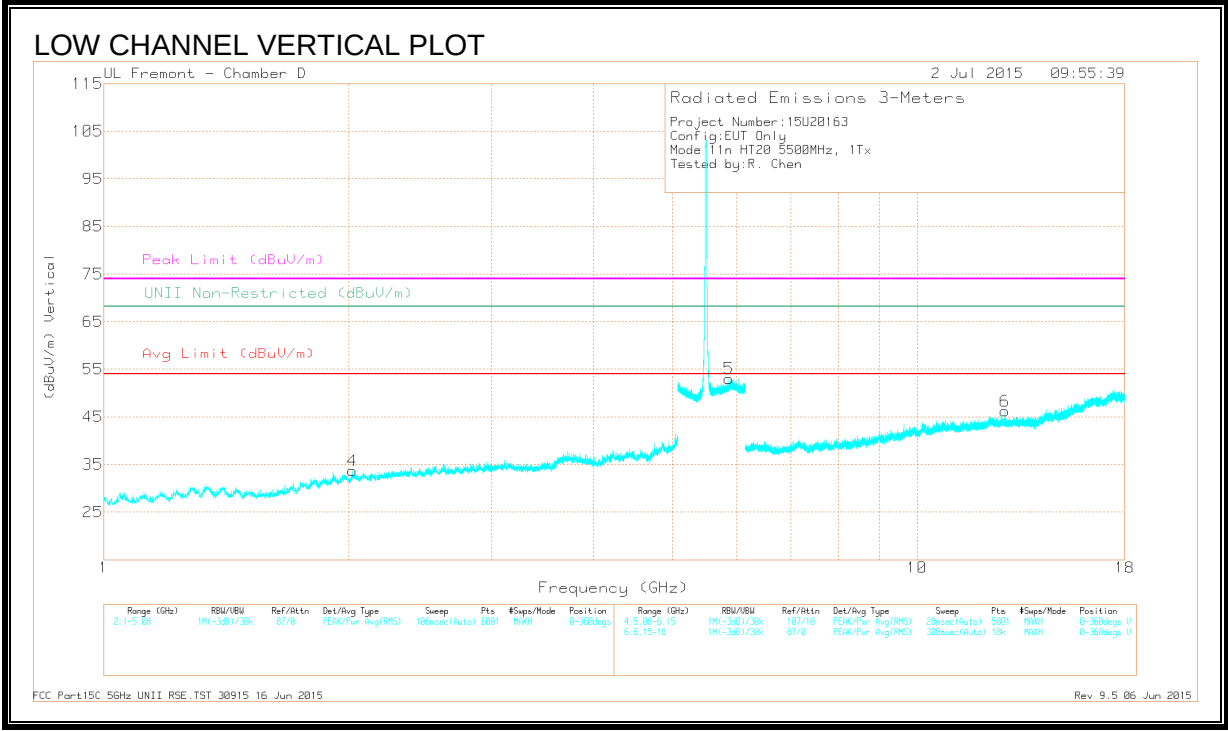


LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

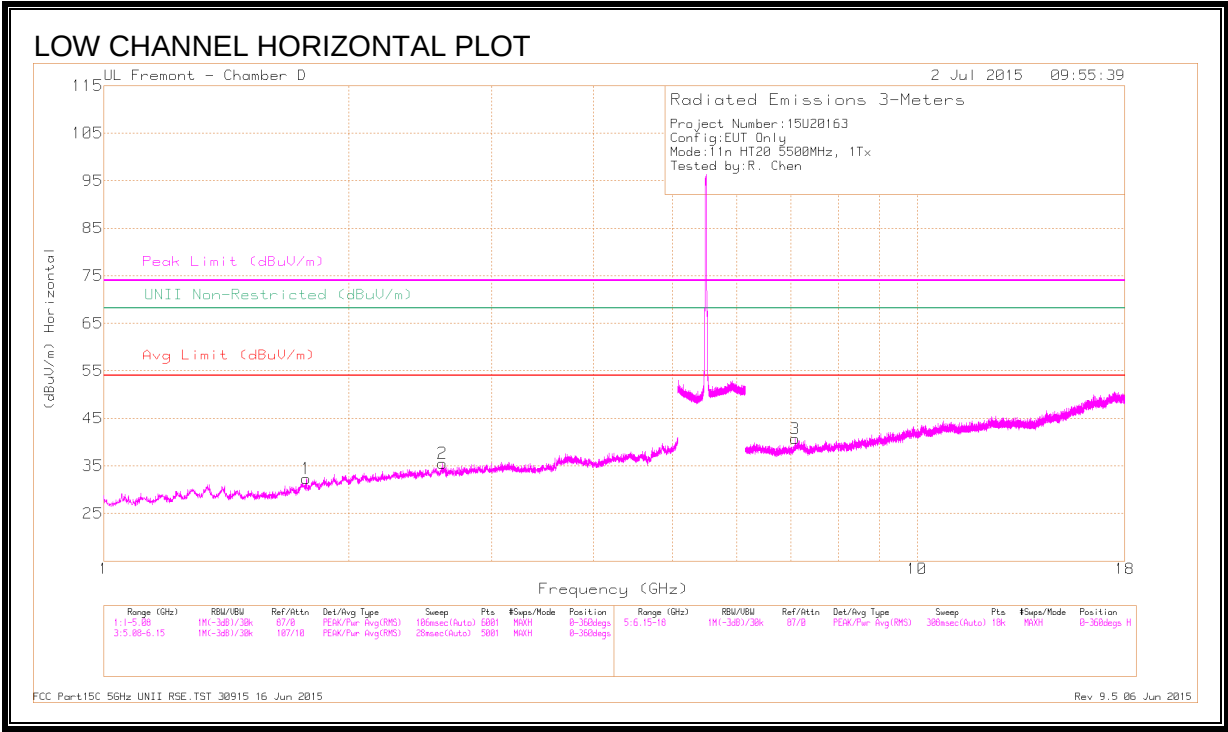



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.774	40.11	PK3	29.8	-31.2	38.71	-	-	-	-	68.2	-29.49	139	202	H
2	2.607	39.54	PK3	32.4	-29.9	42.04	-	-	-	-	68.2	-26.16	215	103	H
3	7.079	36.66	PK3	35.5	-25.3	46.86	-	-	-	-	68.2	-21.34	37	102	H
4	2.021	40.38	PK3	31.1	-30.7	40.78	-	-	-	-	68.2	-27.42	335	103	V
5	5.873	42.36	PK3	35	-17.6	59.76	-	-	-	-	68.2	-8.44	128	200	V
6	12.815	34.71	PK3	39.2	-22.1	51.81	-	-	-	-	68.2	-16.39	329	202	V

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

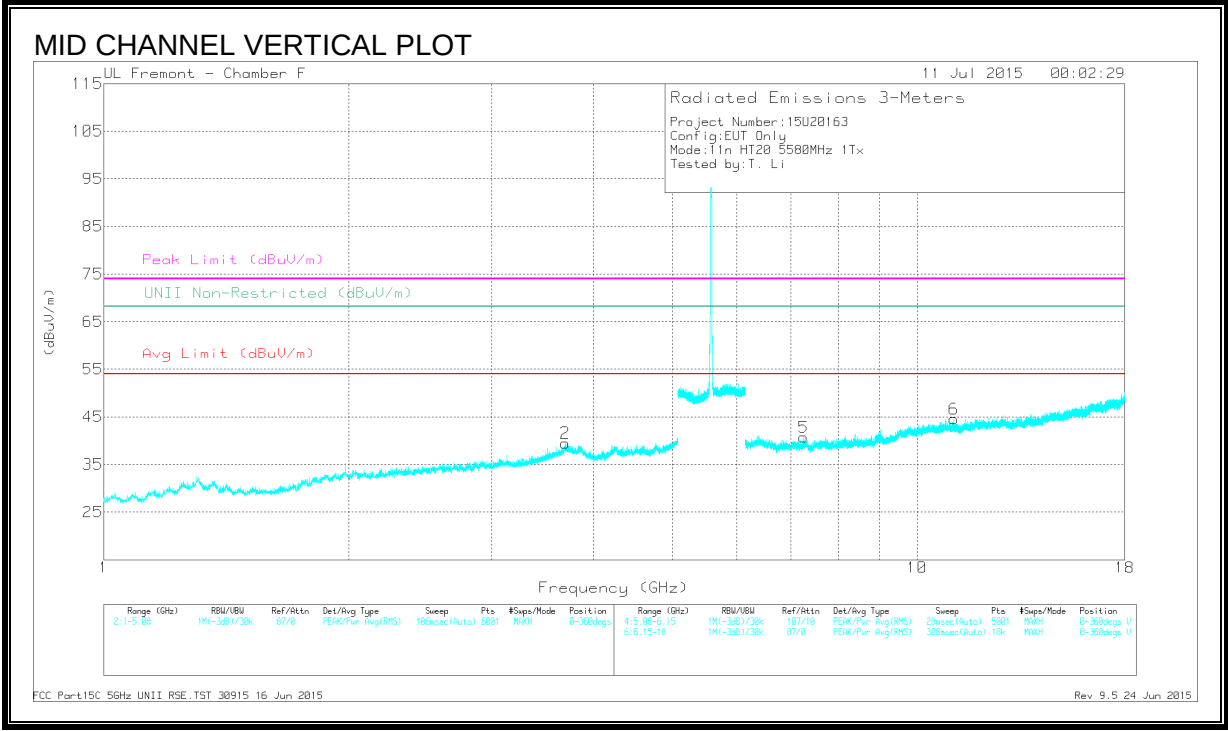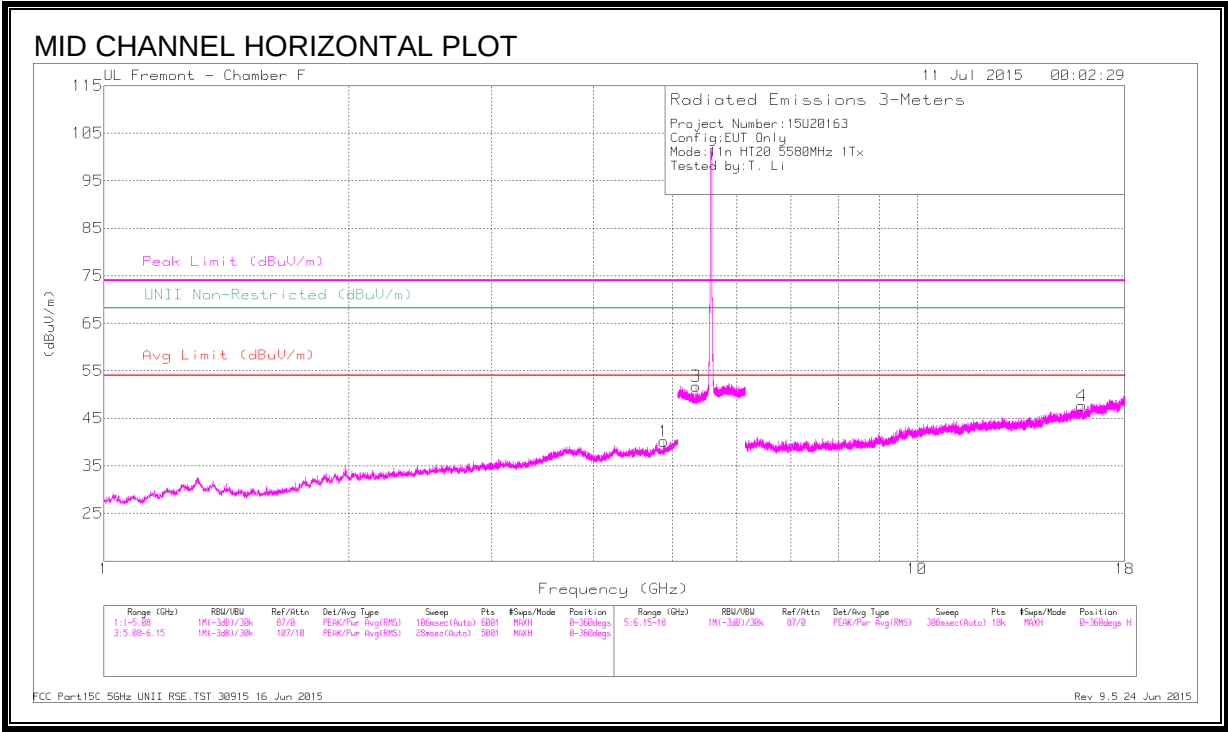

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	38.69	PK-U	34.1	-27.7	45.09	-	-	74	-28.91	-	-	173	202	H
	* 4.882	26.79	ADR	34.1	-27.7	33.19	54	-20.81	-	-	-	-	173	202	H
2	* 3.696	38.93	PK-U	34.7	-29.1	44.53	-	-	74	-29.47	-	-	218	201	V
	* 3.695	27.56	ADR	34.7	-29.1	33.16	54	-20.84	-	-	-	-	218	201	V
3	5.348	42.01	PK-U	34.6	-18.8	57.81	-	-	-	-	68.2	-10.39	152	187	H
4	* 15.941	35.19	PK-U	40.6	-22	53.79	-	-	74	-20.21	-	-	253	132	H
	* 15.943	24.29	ADR	40.6	-22.1	42.79	54	-11.21	-	-	-	-	253	132	H
5	* 7.25	37.7	PK-U	35.6	-25.9	47.4	-	-	74	-26.6	-	-	218	108	V
	* 7.25	26.16	ADR	35.6	-25.9	35.86	54	-18.14	-	-	-	-	218	108	V
6	* 11.09	34.65	PK-U	38.1	-21.9	50.85	-	-	74	-23.15	-	-	115	145	V
	* 11.09	23.39	ADR	38.1	-21.9	39.59	54	-14.41	-	-	-	-	115	145	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

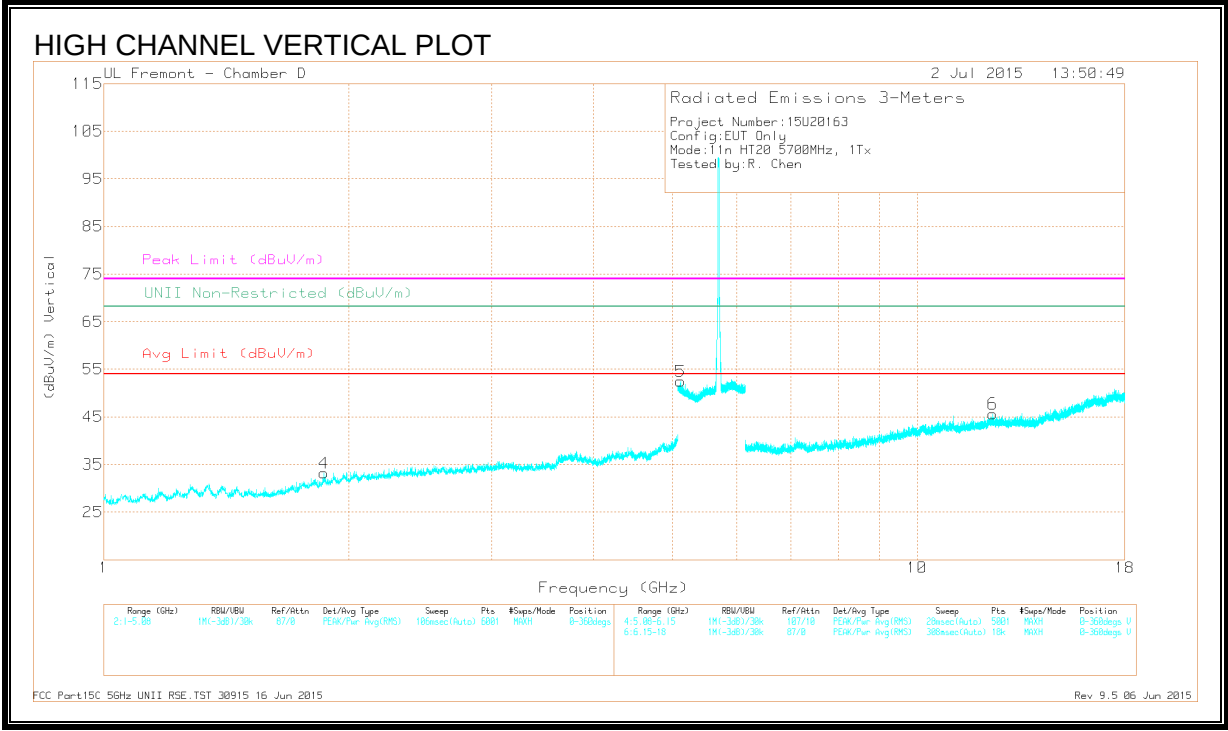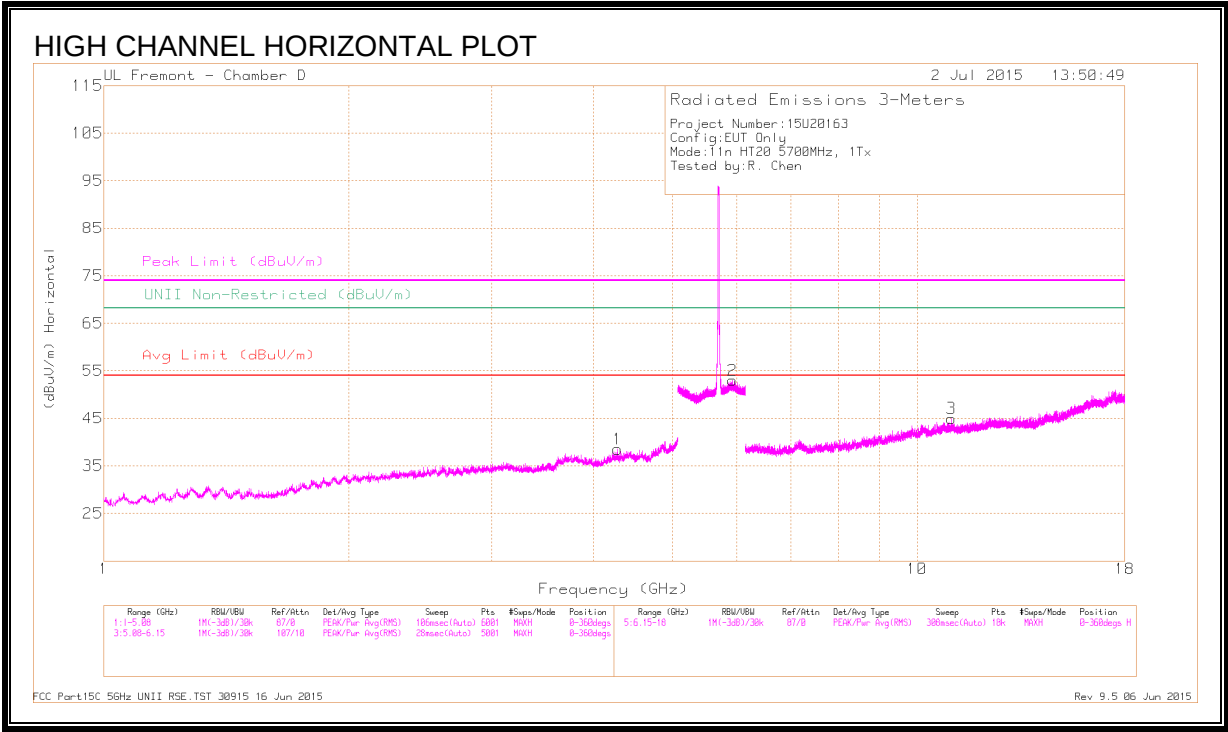

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.28	38.13	PK3	33.6	-27.9	43.83	-	-	74	-30.17	-	-	345	201	H
	* 4.279	26.75	ADR	33.6	-27.9	32.45	54	-21.55	-	-	-	-	345	201	H
2	5.933	41.71	PK3	35.2	-17.4	59.51	-	-	-	-	68.2	-8.69	186	209	H
3	* 11.015	34.57	PK3	38.1	-21.5	51.17	-	-	74	-22.83	-	-	223	245	H
	* 11.017	22.99	ADR	38.1	-21.5	39.59	54	-14.41	-	-	-	-	223	245	H
4	1.865	41.02	PK3	30.6	-31.4	40.22	-	-	-	-	68.2	-27.98	87	102	V
5	* 5.119	42.17	PK3	34.3	-18.5	57.97	-	-	74	-16.03	-	-	163	200	V
	* 5.121	31.22	ADR	34.3	-18.5	47.02	54	-6.98	-	-	-	-	163	200	V
6	* 12.381	33.94	PK3	39	-21.6	51.34	-	-	74	-22.66	-	-	220	172	V
	* 12.382	23.49	ADR	39	-21.6	40.89	54	-13.11	-	-	-	-	220	172	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS

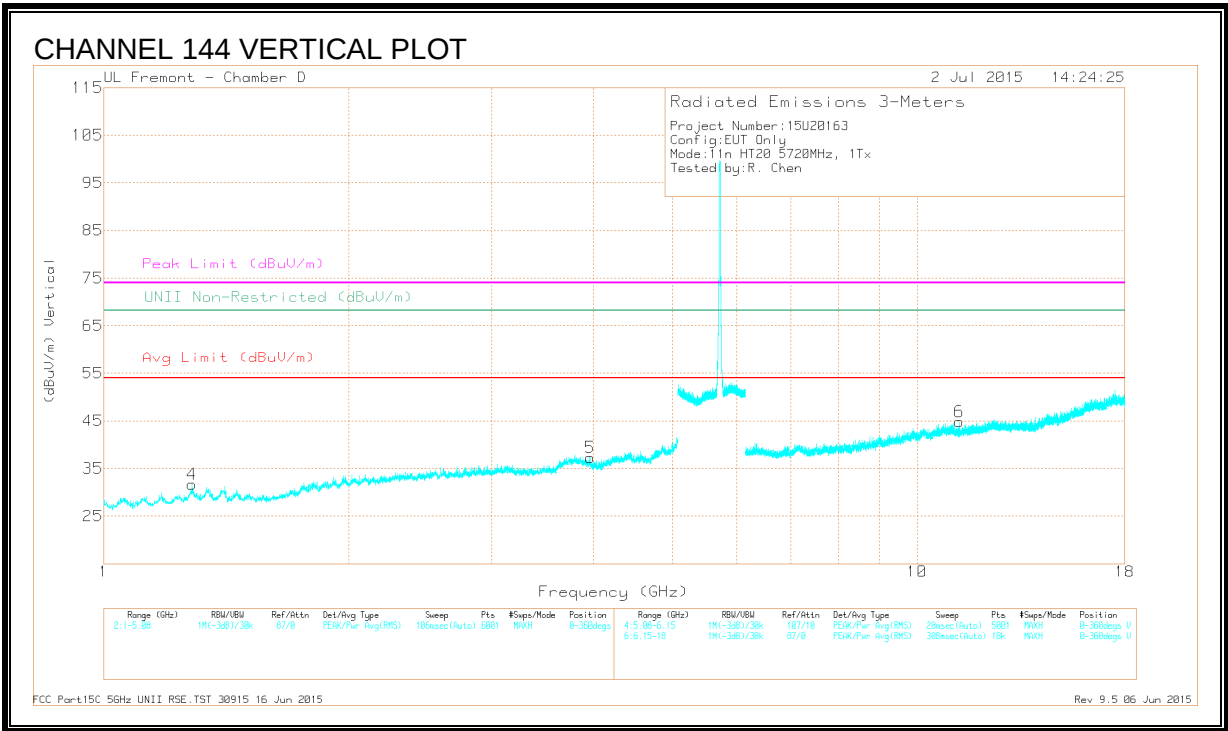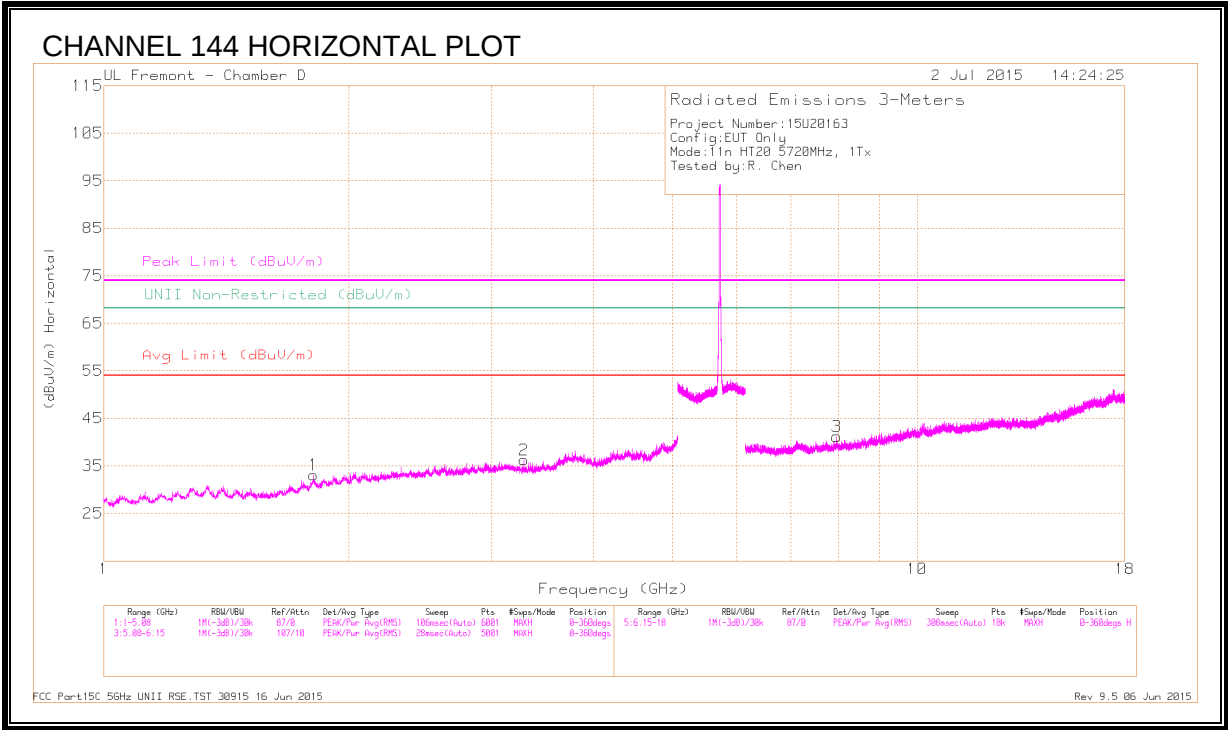

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.813	40.56	PK3	30.2	-31.3	39.46	-	-	-	-	68.2	-28.74	0	200	H
2	3.285	39.69	PK3	32.7	-29.5	42.89	-	-	-	-	68.2	-25.31	0	200	H
3	7.967	35.9	PK3	35.7	-23.9	47.7	-	-	-	-	68.2	-20.5	0	200	H
4	* 1.284	41.08	PK3	28.9	-31.9	38.08	-	-	74	-35.92	-	-	0	103	V
	* 1.285	29.48	ADR	28.9	-31.9	26.48	54	-27.52	-	-	-	-	0	103	V
5	* 3.963	38.09	PK3	33.4	-28.1	43.39	-	-	74	-30.61	-	-	0	200	V
	* 3.962	27.19	ADR	33.4	-28.1	32.49	54	-21.51	-	-	-	-	0	200	V
6	* 11.26	34.45	PK3	38	-22	50.45	-	-	74	-23.55	-	-	0	200	V
	* 11.262	23.18	ADR	38	-22	39.18	54	-14.82	-	-	-	-	0	200	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.15. 802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

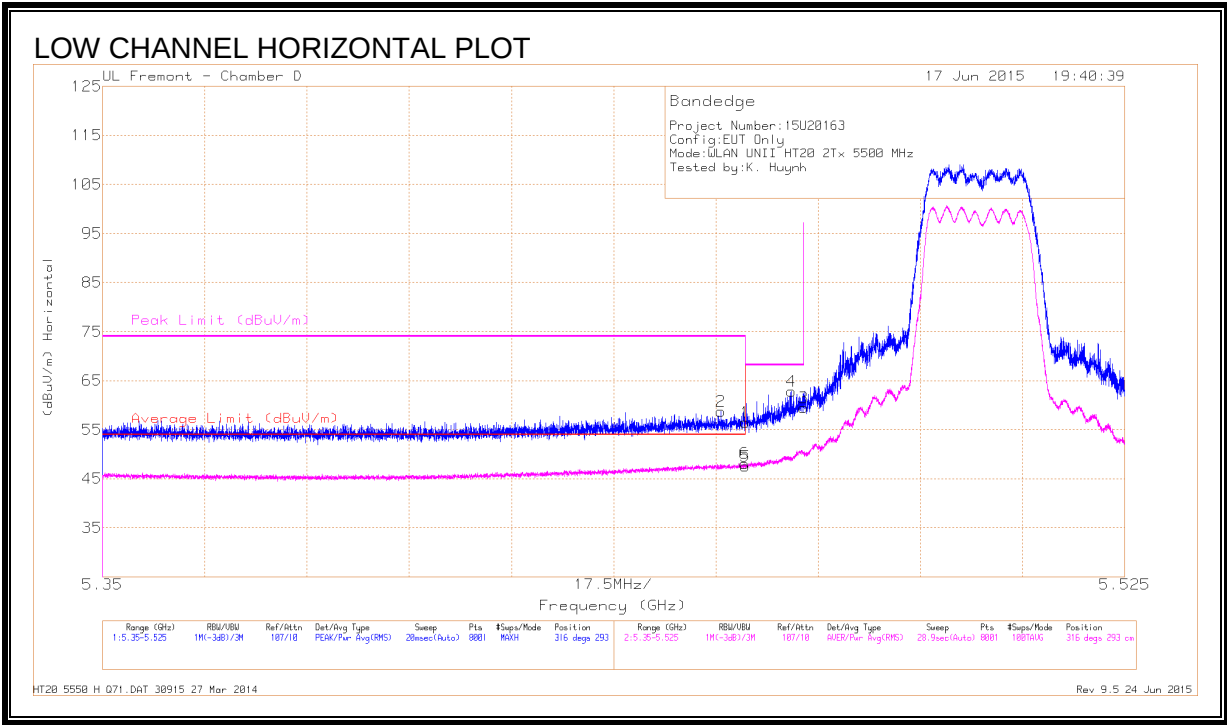


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.17	Pk	34.6	-21.3	56.47	-	-	74	-17.53	316	293	H
2	* 5.456	45.5	Pk	34.6	-21.4	58.7	-	-	74	-15.3	316	293	H
3	5.47	46.16	Pk	34.6	-21.3	59.46	-	-	68.2	-8.74	316	293	H
4	5.468	49.57	Pk	34.6	-21.3	62.87	-	-	68.2	-5.33	316	293	H
5	* 5.46	34.29	RMS	34.6	-21.3	47.59	54	-6.41	-	-	316	293	H
6	* 5.46	34.82	RMS	34.6	-21.3	48.12	54	-5.88	-	-	316	293	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

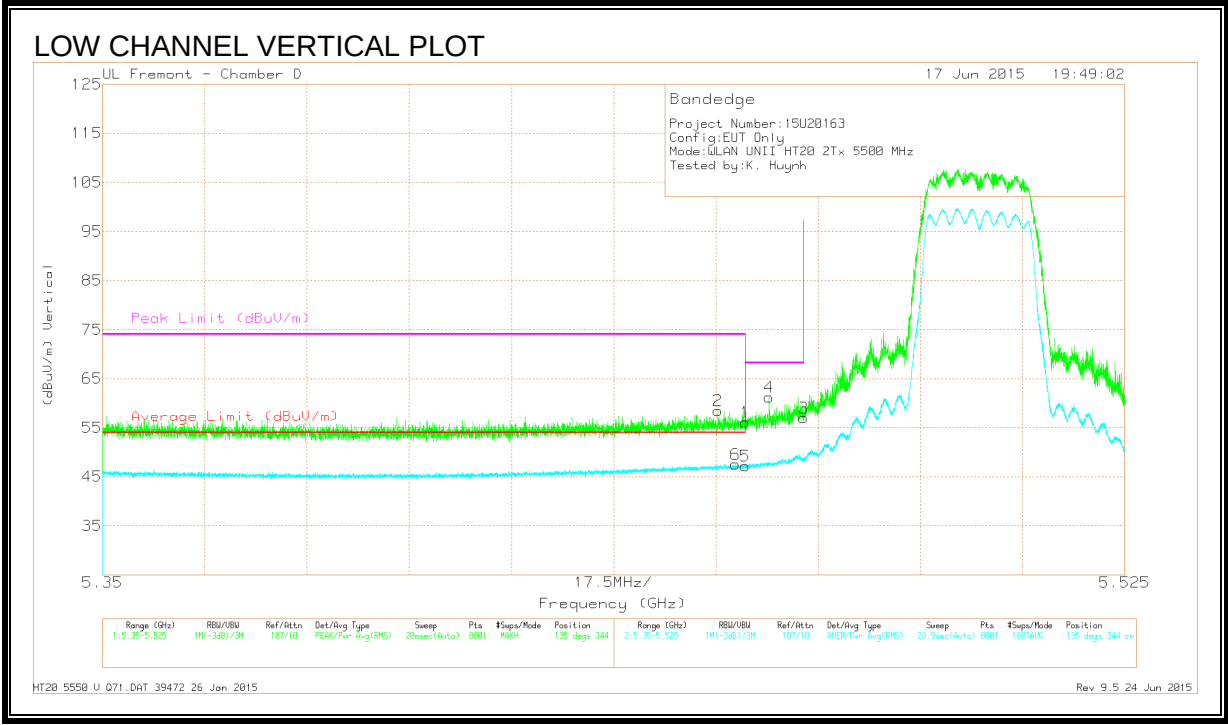

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.84	Pk	34.6	-21.3	56.14	-	-	74	-17.86	135	344	V
2	* 5.455	45.24	Pk	34.6	-21.4	58.44	-	-	74	-15.56	135	344	V
3	5.47	43.66	Pk	34.6	-21.3	56.96	-	-	68.2	-11.24	135	344	V
4	5.464	47.89	Pk	34.6	-21.3	61.19	-	-	68.2	-7.01	135	344	V
5	* 5.46	33.88	RMS	34.6	-21.3	47.18	54	-6.82	-	-	135	344	V
6	* 5.458	34.34	RMS	34.6	-21.4	47.54	54	-6.46	-	-	135	344	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

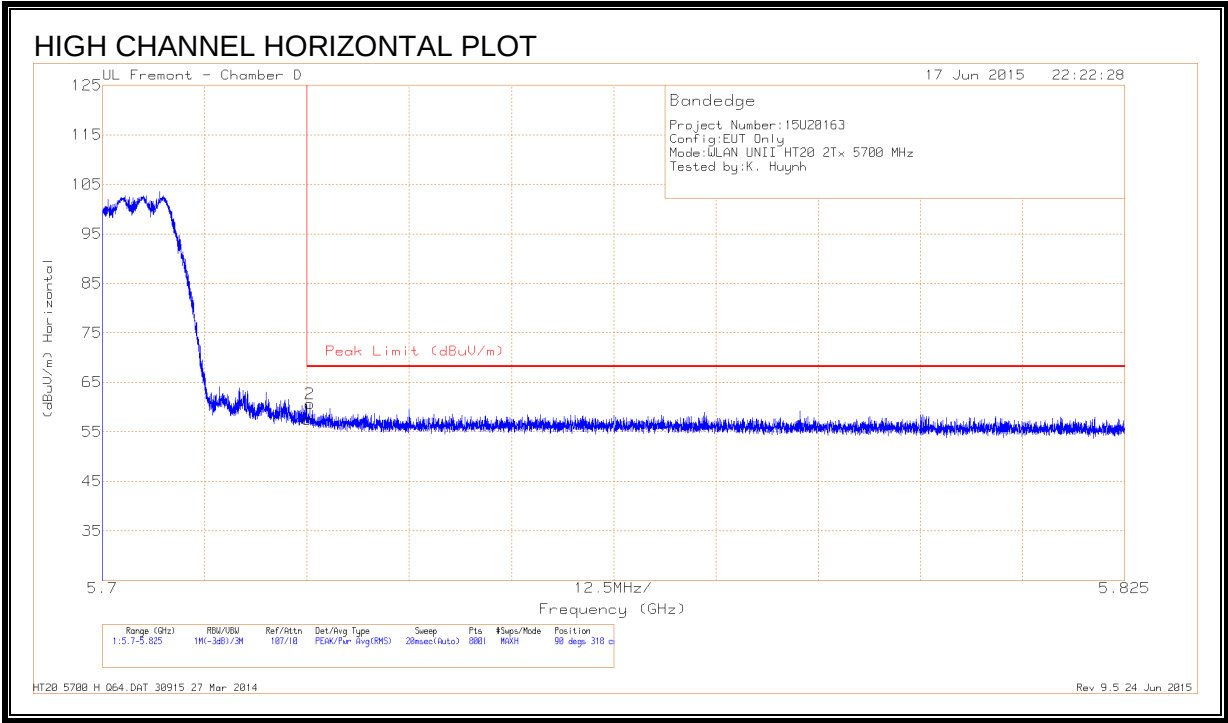

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.74	Pk	34.7	-21	57.44	68.2	-10.76	90	318	H
2	5.725	47.02	Pk	34.7	-21	60.72	68.2	-7.48	90	318	H

Pk - Peak detector


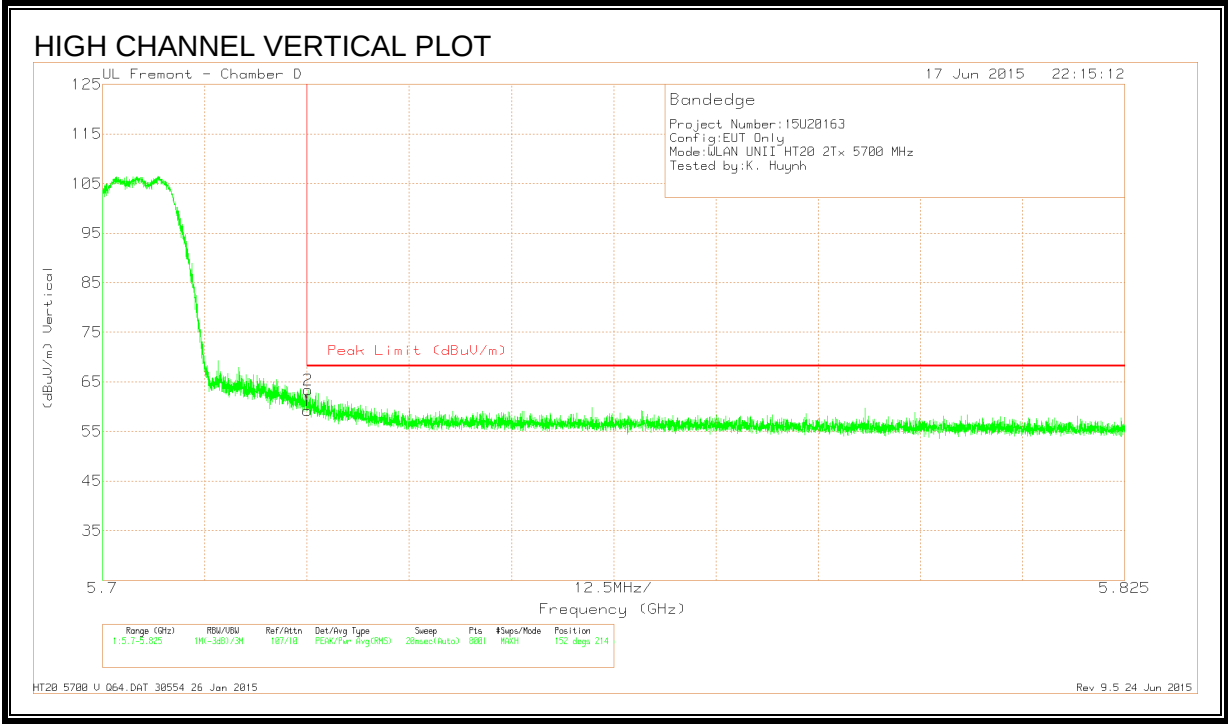


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.53	Pk	34.7	-21	59.23	68.2	-8.97	152	214	V
2	5.725	49.68	Pk	34.7	-21	63.38	68.2	-4.82	152	214	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

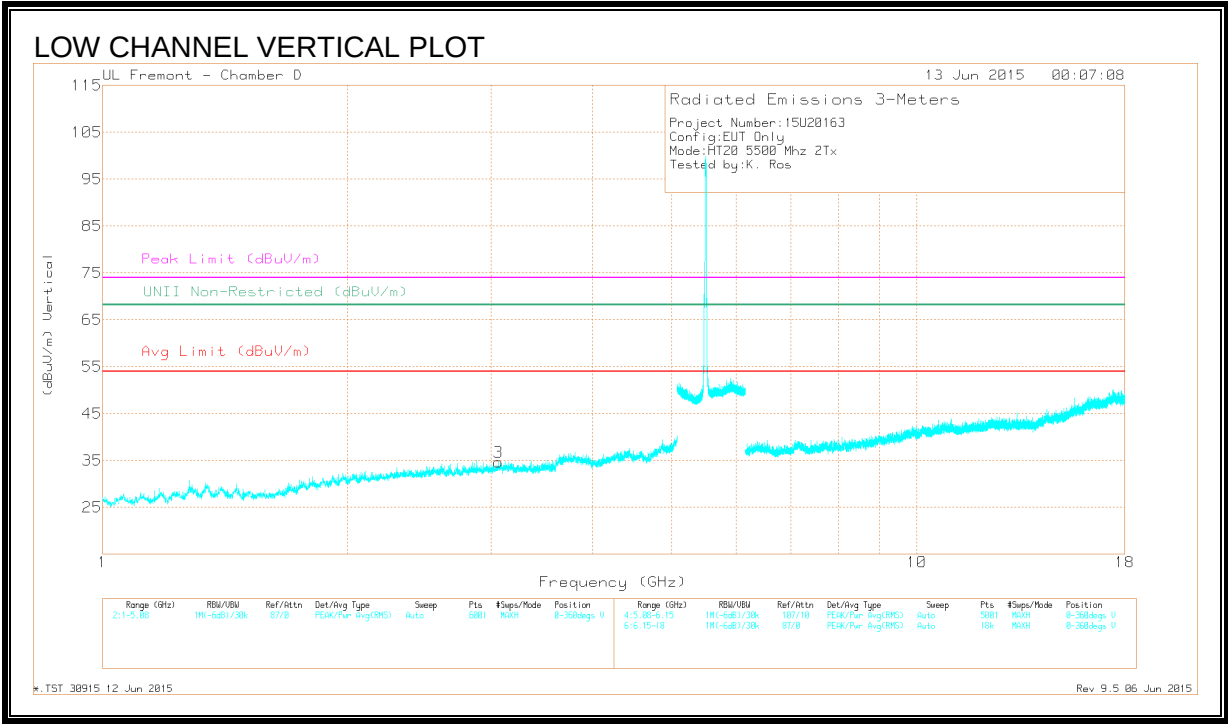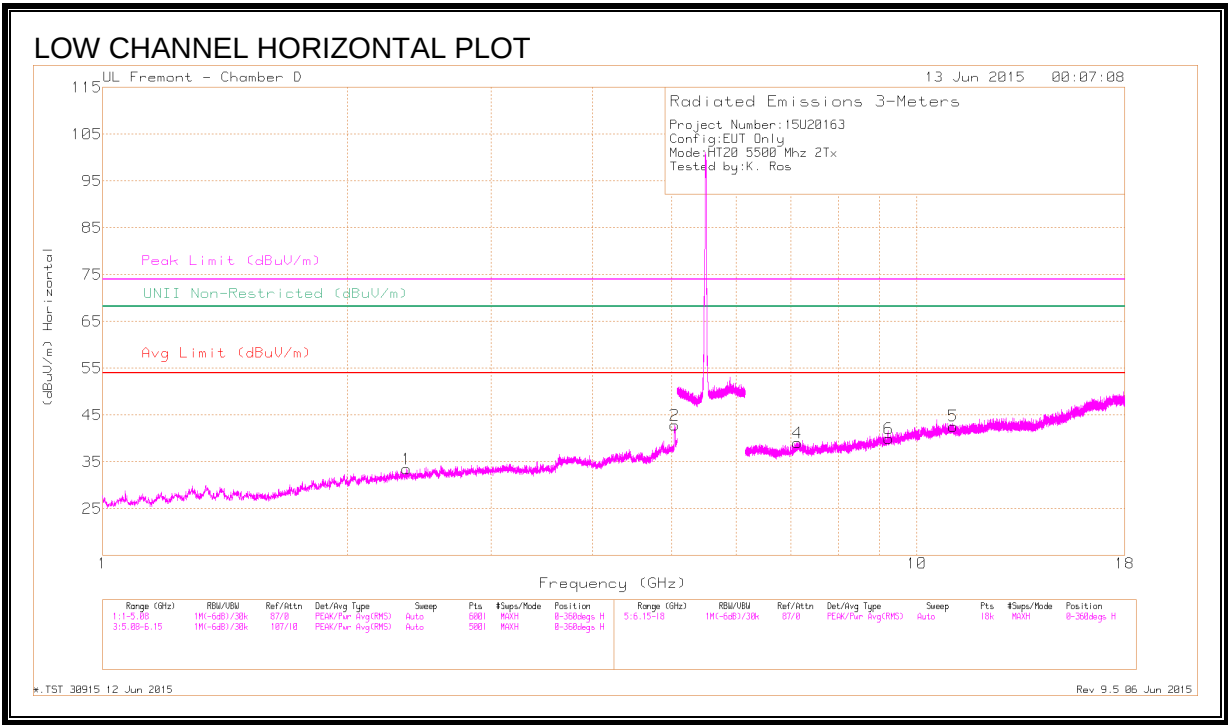

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.363	39.96	PK3	32	-30.5	41.46	-	-	74	-32.54	-	-	45	102	H
	* 2.362	27.93	ADR	32	-30.5	29.43	54	-24.57	-	-	-	-	45	102	H
2	* 5.042	37.14	PK3	34.3	-25.6	45.84	-	-	74	-28.16	-	-	133	365	H
	* 5.042	26.1	ADR	34.3	-25.6	34.8	54	-19.2	-	-	-	-	133	365	H
3	3.06	39.45	PK3	32.9	-29.6	42.75	-	-	-	-	68.2	-25.45	175	201	V
4	7.134	36.12	PK3	35.5	-24.4	47.22	-	-	-	-	68.2	-20.98	347	112	H
5	* 11.08	34.84	PK3	38	-21.5	51.34	-	-	74	-22.66	-	-	135	202	H
	* 11.079	23.33	ADR	38	-21.5	39.83	54	-14.17	-	-	-	-	135	202	H
6	9.232	34.07	PK3	36.3	-22.2	48.17	-	-	-	-	68.2	-20.03	196	121	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

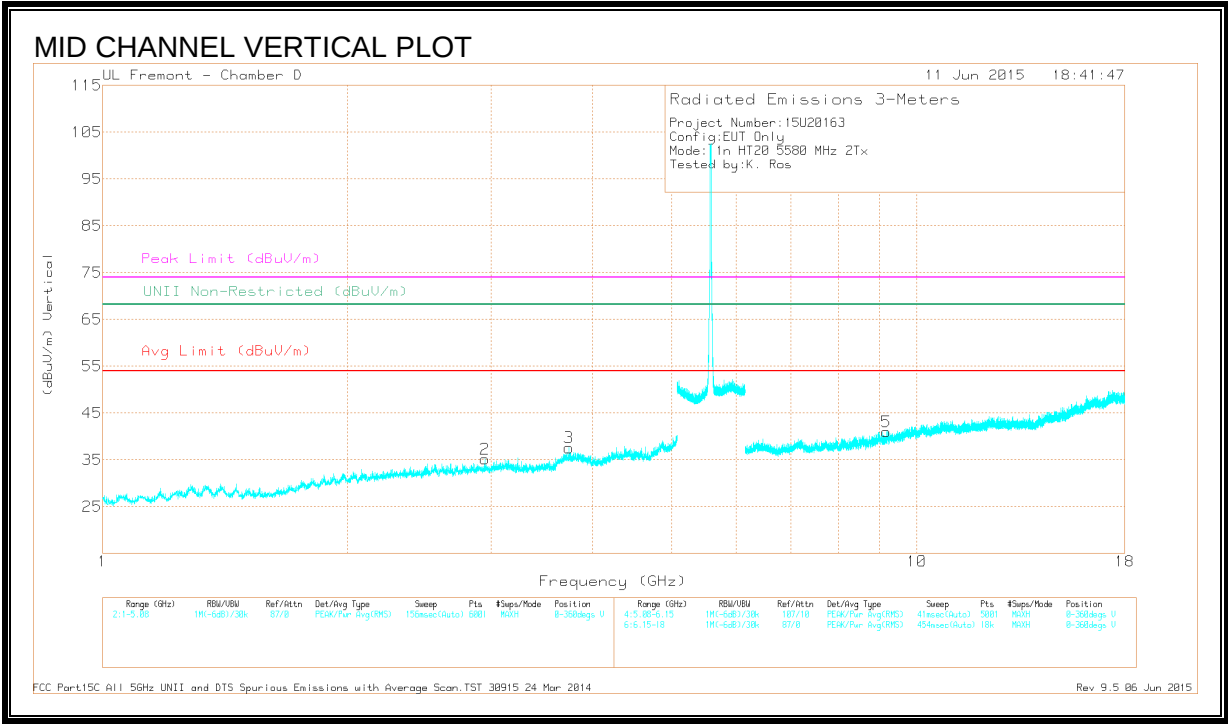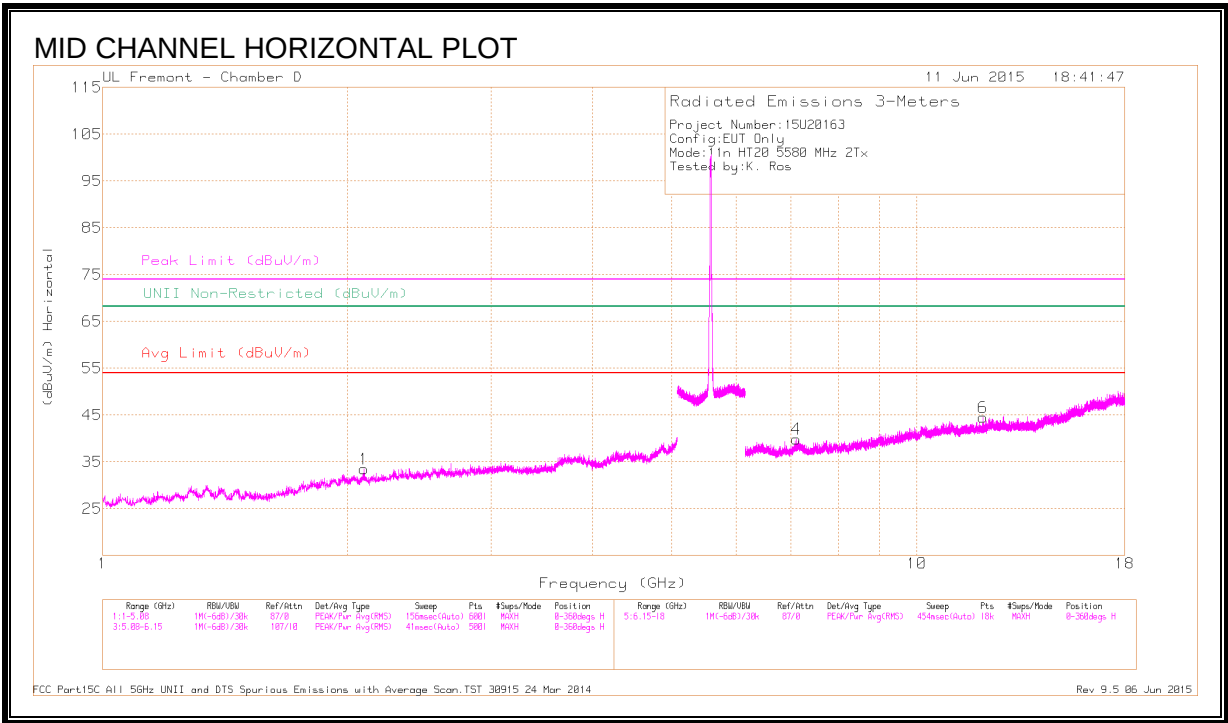

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.092	39.88	PK-U	31.3	-30.6	40.58	-	-	-	-	68.2	-27.62	41	120	H
2	2.948	39.65	PK-U	32.8	-29.9	42.55	-	-	-	-	68.2	-25.65	65	138	V
3	* 3.739	39.37	PK-U	33.3	-29.1	43.57	-	-	74	-30.43	-	-	185	188	V
	* 3.742	27.53	ADR	33.3	-29.1	31.73	54	-22.27	-	-	-	-	185	188	V
4	7.106	36.21	PK-U	35.5	-24.9	46.81	-	-	-	-	68.2	-21.39	43	118	H
5	* 9.164	35.69	PK-U	36.2	-23.1	48.79	-	-	74	-25.21	-	-	51	153	V
	* 9.164	23.77	ADR	36.2	-23.1	36.87	54	-17.13	-	-	-	-	51	153	V
6	* 12.063	34.21	PK-U	38.8	-22.2	50.81	-	-	74	-23.19	-	-	60	143	H
	* 12.063	23.26	ADR	38.8	-22.2	39.86	54	-14.14	-	-	-	-	60	143	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

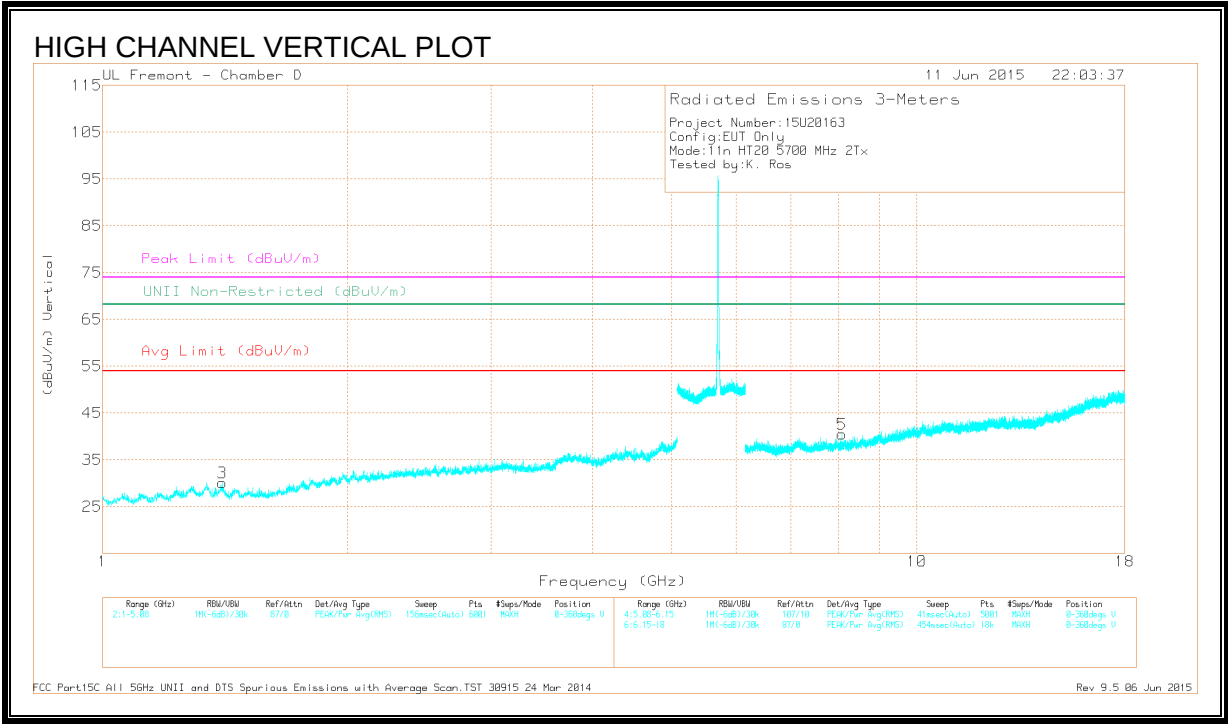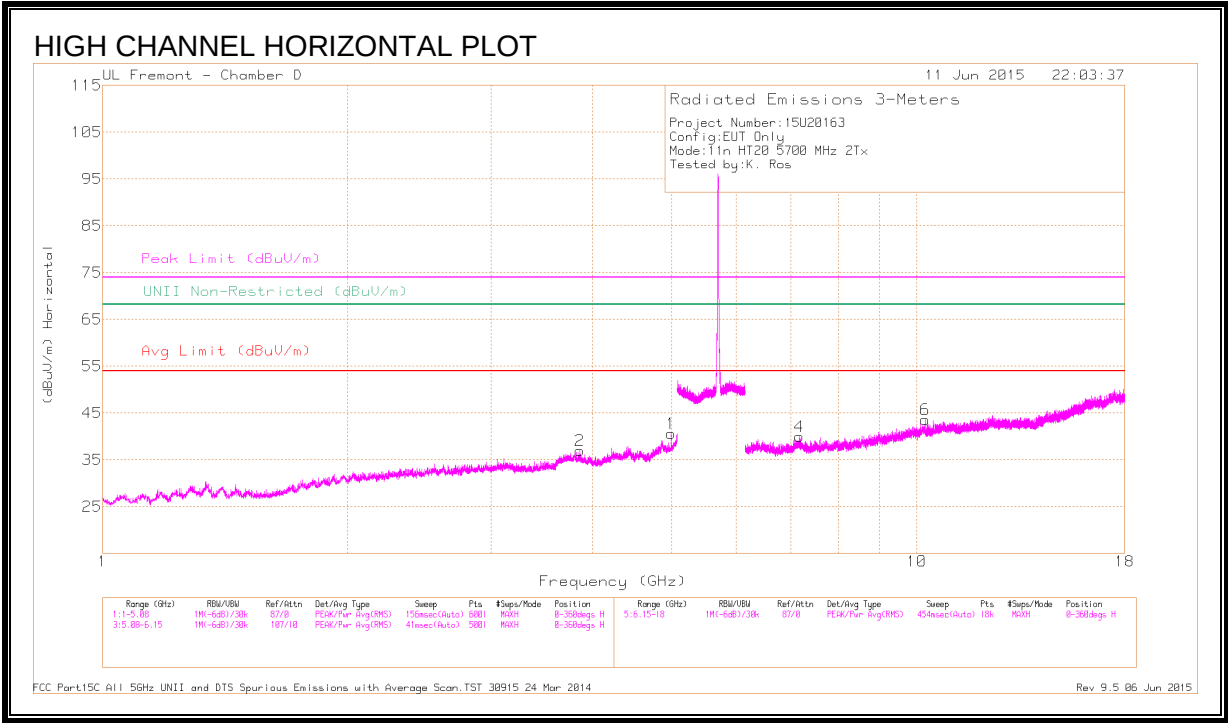

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.987	38.81	PK3	34.2	-26.9	46.11	-	-	74	-27.89	-	-	340	116	H
	* 4.988	27.7	ADR	34.2	-26.9	35	54	-19	-	-	-	-	340	116	H
2	* 3.854	39.33	PK3	33.4	-28.9	43.83	-	-	74	-30.17	-	-	216	144	H
	* 3.857	27.75	ADR	33.4	-29	32.15	54	-21.85	-	-	-	-	216	144	H
3	* 1.403	41.09	PK3	28.6	-31.4	38.29	-	-	74	-35.71	-	-	229	100	V
	* 1.403	29.17	ADR	28.6	-31.4	26.37	54	-27.63	-	-	-	-	229	100	V
4	7.174	35.73	PK3	35.5	-24.3	46.93	-	-	74	-27.07	68.2	-21.27	149	110	H
5	* 8.093	35.95	PK3	35.6	-24.3	47.25	-	-	74	-26.75	-	-	299	164	V
	* 8.093	24.54	ADR	35.6	-24.3	35.84	54	-18.16	-	-	-	-	299	164	V
6	10.239	33.68	PK3	37.2	-21.1	49.78	-	-	74	-24.22	68.2	-18.42	220	110	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS

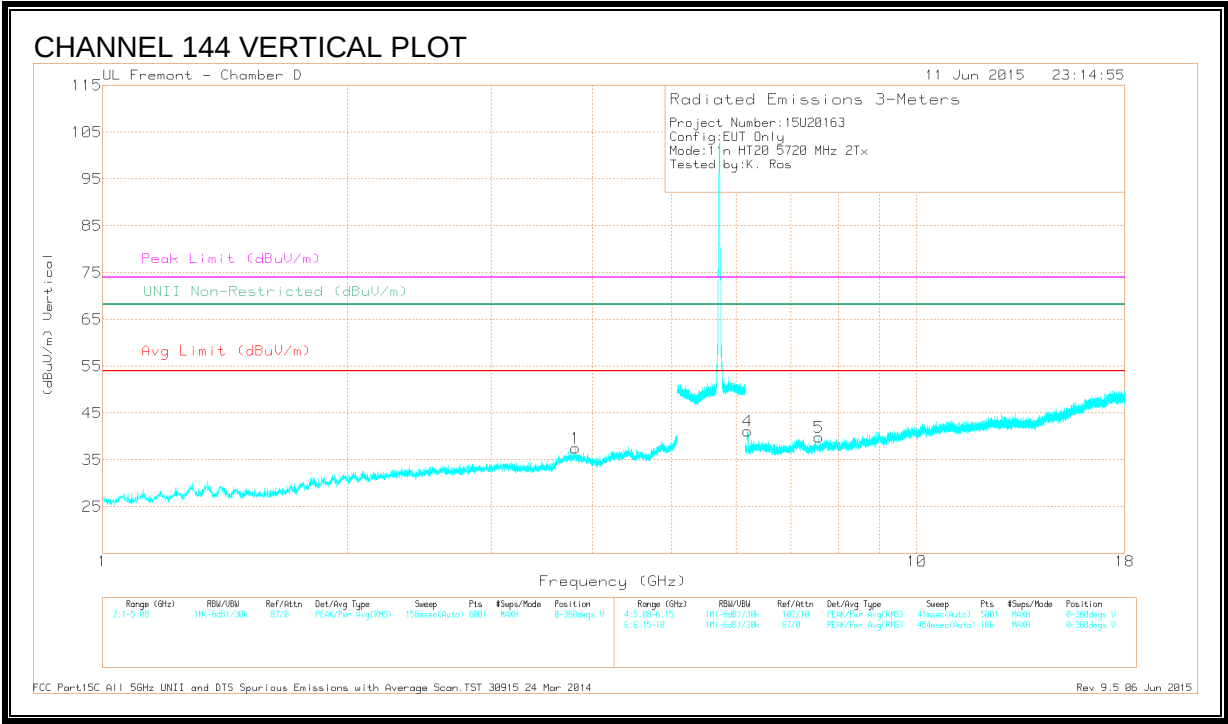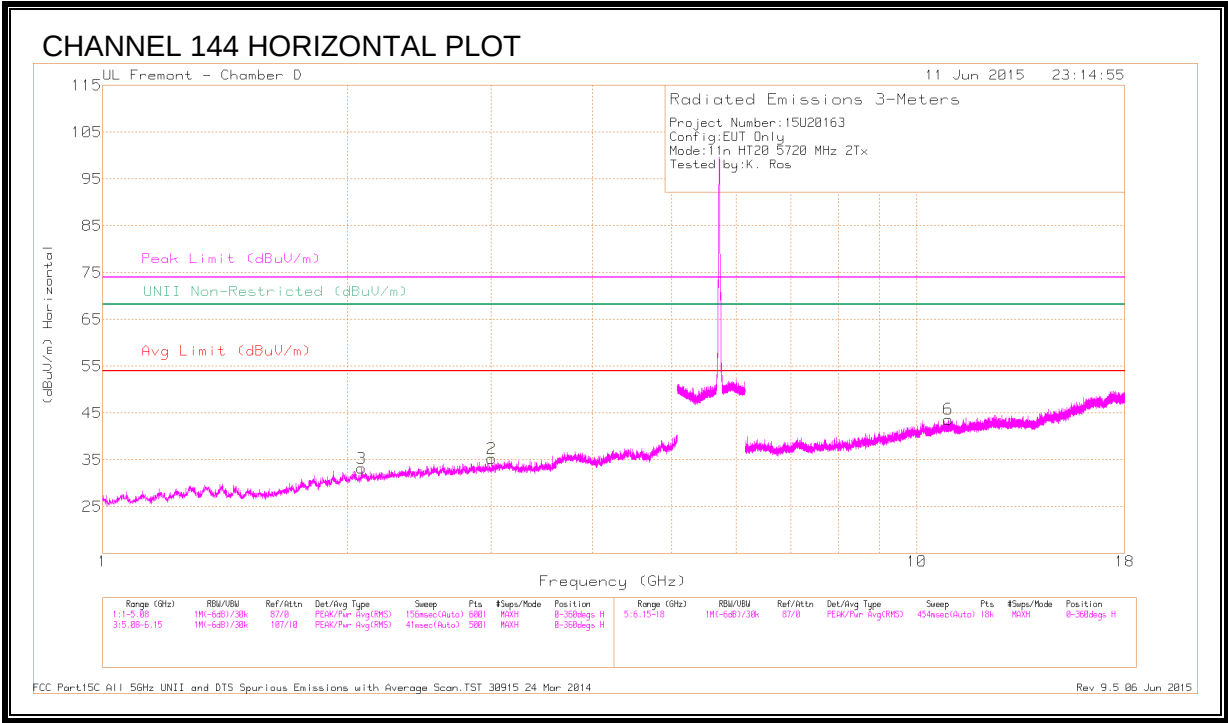

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.808	39.22	PK3	33.4	-28.6	44.02	-	-	74	-29.98	-	-	256	121	V
	* 3.809	27.53	ADR	33.4	-28.6	32.33	54	-21.67	-	-	-	-	256	121	V
2	3.004	39.91	PK3	32.9	-30.3	42.51	-	-	74	-31.49	68.2	-25.69	275	141	H
3	2.083	40.08	PK3	31.3	-30.6	40.78	-	-	74	-33.22	68.2	-27.42	275	141	H
4	6.203	37.7	PK3	35.5	-26.7	46.5	-	-	74	-27.5	68.2	-21.7	296	321	V
5	* 7.578	36.44	PK3	35.6	-25.3	46.74	-	-	74	-27.26	-	-	0	291	V
	* 7.578	24.87	ADR	35.6	-25.3	35.17	54	-18.83	-	-	-	-	0	291	V
6	* 10.933	34.01	PK3	38	-21.6	50.41	-	-	74	-23.59	-	-	349	361	H
	* 10.932	22.38	ADR	38	-21.6	38.78	54	-15.22	-	-	-	-	349	361	H


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.16. 802.11n HT40 1TX MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

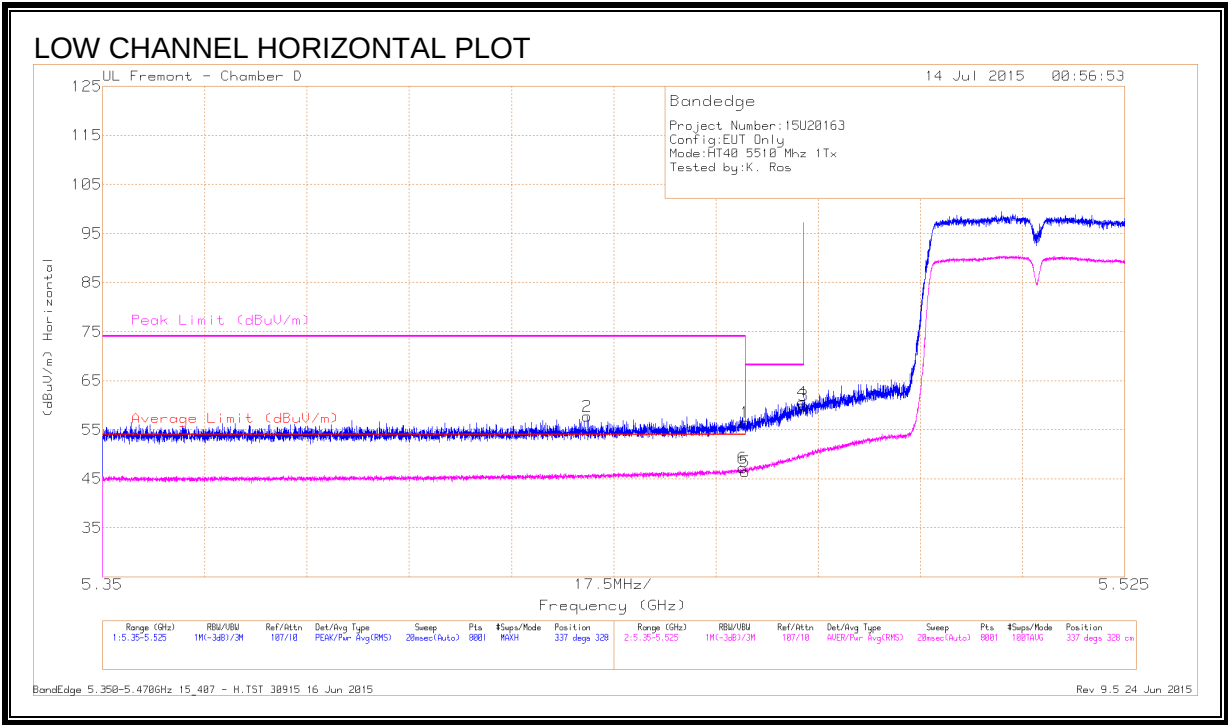


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.09	Pk	34.4	-18	56.49	-	-	74	-17.51	337	328	H
2	* 5.433	41.64	Pk	34.4	-18.3	57.74	-	-	74	-16.26	337	328	H
5	* 5.46	30.01	RMS	34.4	-18	46.41	54	-7.59	-	-	337	328	H
6	* 5.46	30.77	RMS	34.4	-18	47.17	54	-6.83	-	-	337	328	H
3	5.47	43.59	Pk	34.4	-18	59.99	-	-	68.2	-8.21	337	328	H
4	5.47	44.22	Pk	34.4	-18	60.62	-	-	68.2	-7.58	337	328	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

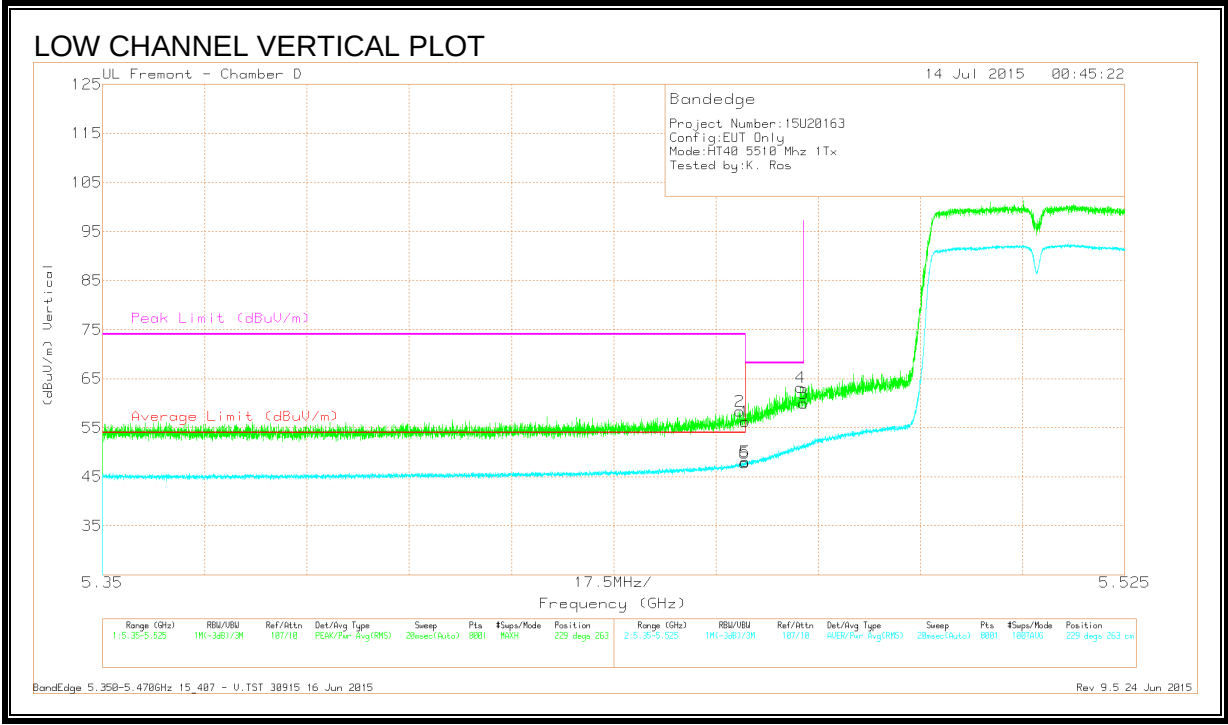

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.82	Pk	34.4	-18	56.22	-	-	74	-17.78	229	263	V
2	* 5.459	41.92	Pk	34.4	-18	58.32	-	-	74	-15.68	229	263	V
5	* 5.46	31.68	RMS	34.4	-18	48.08	54	-5.92	-	-	229	263	V
6	* 5.46	31.45	RMS	34.4	-18	47.85	54	-6.15	-	-	229	263	V
4	5.469	46.83	Pk	34.4	-18	63.23	-	-	68.2	-4.97	229	263	V
3	5.47	43.56	Pk	34.4	-18	59.96	-	-	68.2	-8.24	229	263	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE, CHAIN 0 (HIGH CHANNEL)

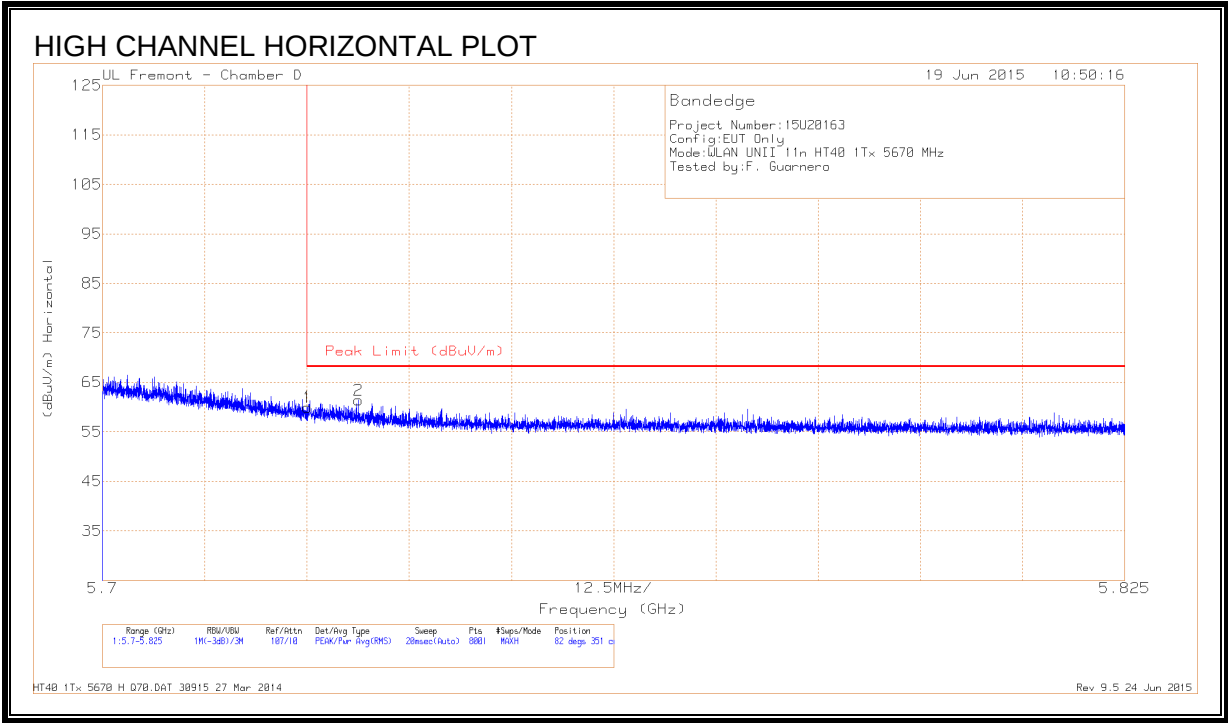

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.3	Pk	34.7	-21	60	68.2	-8.2	82	351	H
2	5.731	47.57	Pk	34.7	-20.9	61.37	68.2	-6.83	82	351	H

Pk - Peak detector


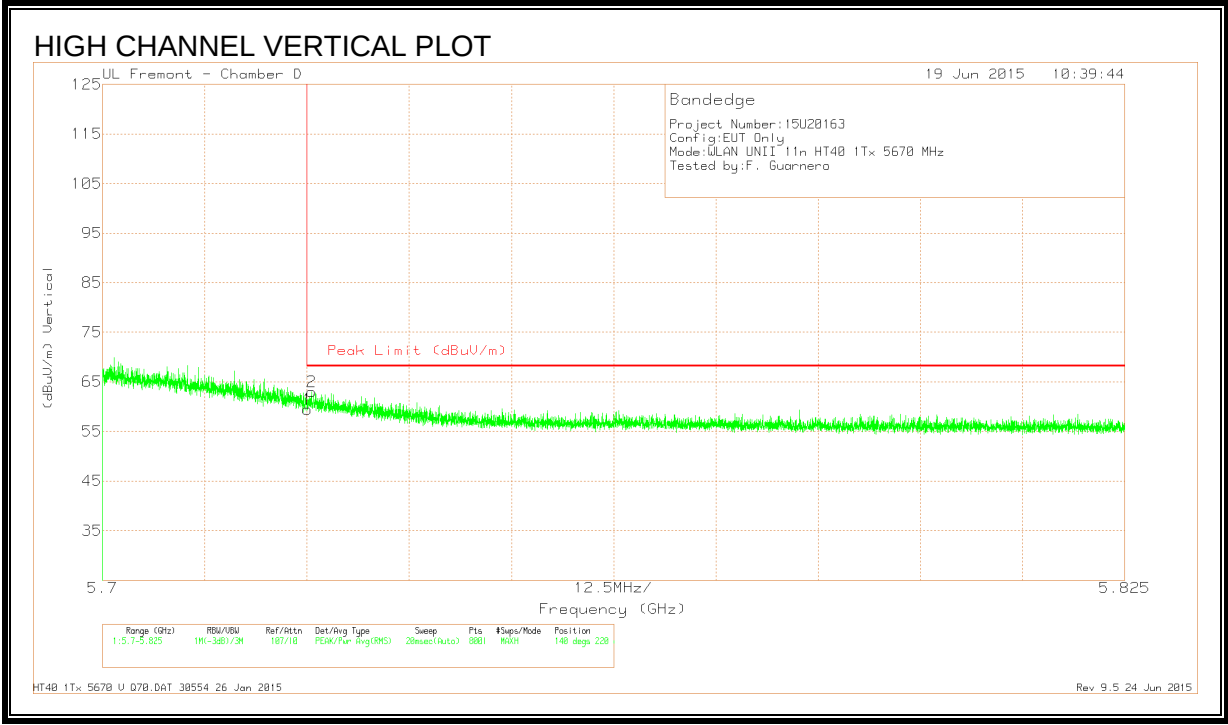


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.77	Pk	34.7	-21	59.47	68.2	-8.73	140	220	V
2	5.726	49.28	Pk	34.7	-21	62.98	68.2	-5.22	140	220	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

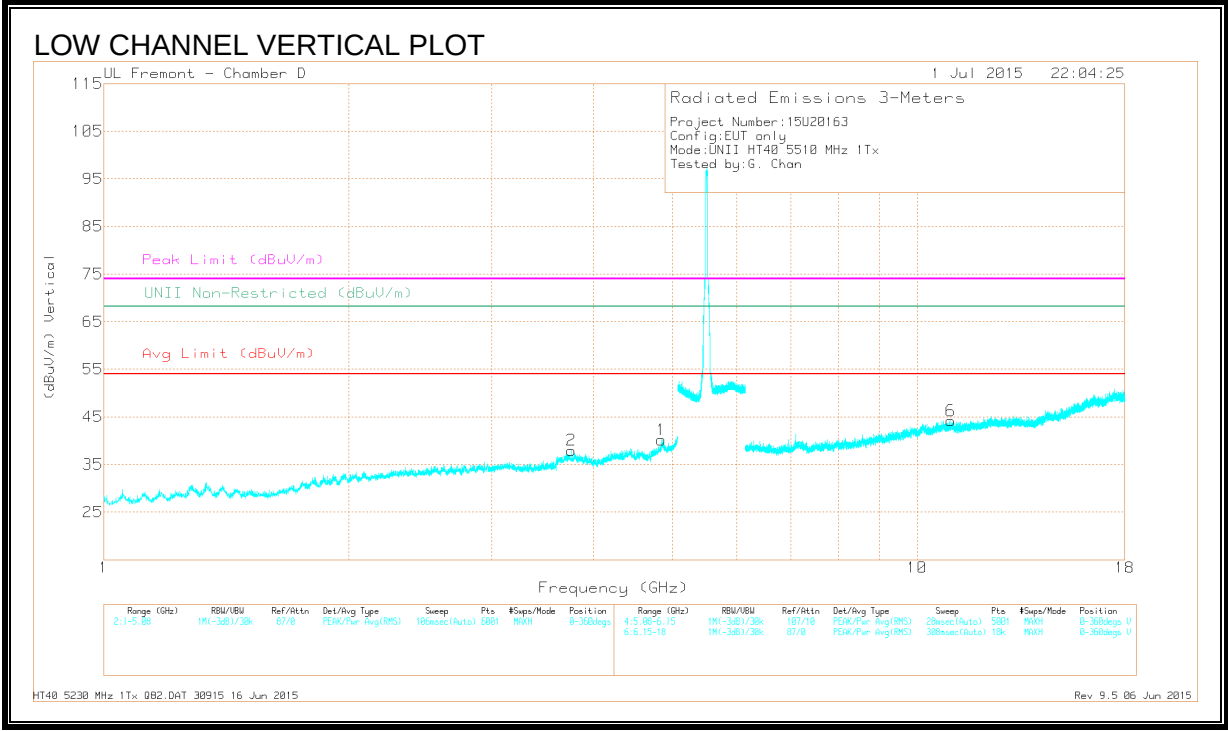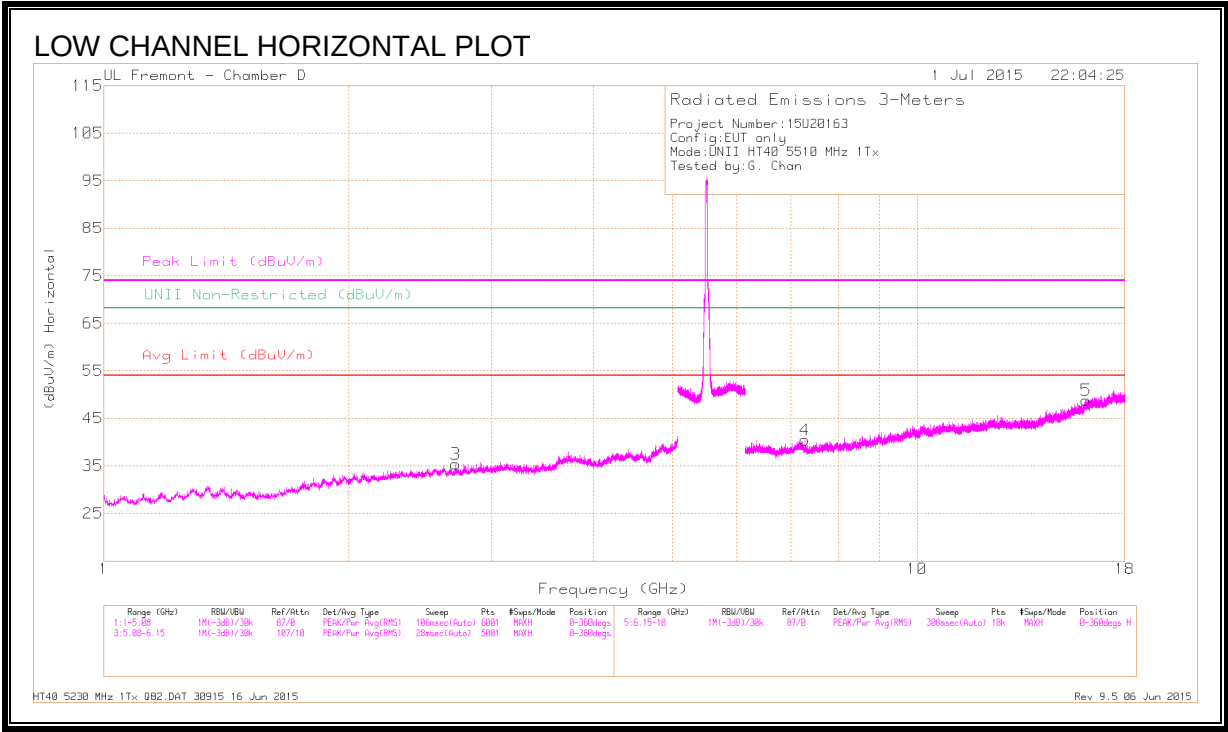

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.852	37.09	PK3	34.1	-25.8	45.39	-	-	74	-28.61	-	-	195	323	V
	* 4.853	25.53	ADR	34.1	-25.8	33.83	54	-20.17	-	-	-	-	195	323	V
2	* 3.757	38.94	PK3	33.3	-29	43.24	-	-	74	-30.76	-	-	244	340	V
	* 3.759	26.86	ADR	33.3	-28.9	31.26	54	-22.74	-	-	-	-	244	340	V
3	* 2.706	39.69	PK3	32.5	-30.6	41.59	-	-	74	-32.41	-	-	223	207	H
	* 2.709	27.8	ADR	32.5	-30.6	29.7	54	-24.3	-	-	-	-	223	207	H
4	* 7.282	36.46	PK3	35.5	-25.2	46.76	-	-	74	-27.24	-	-	353	360	H
	* 7.281	24.64	ADR	35.5	-25.1	35.04	54	-18.96	-	-	-	-	353	360	H
5	* 16.132	34.52	PK3	41.3	-20.1	55.72	-	-	74	-18.28	-	-	252	185	H
	* 16.131	22.69	ADR	41.3	-20.1	43.89	54	-10.11	-	-	-	-	252	185	H
6	* 10.999	35.07	PK3	38.1	-21.7	51.47	-	-	74	-22.53	-	-	354	321	V
	* 10.999	22.54	ADR	38.1	-21.7	38.94	54	-15.06	-	-	-	-	354	321	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

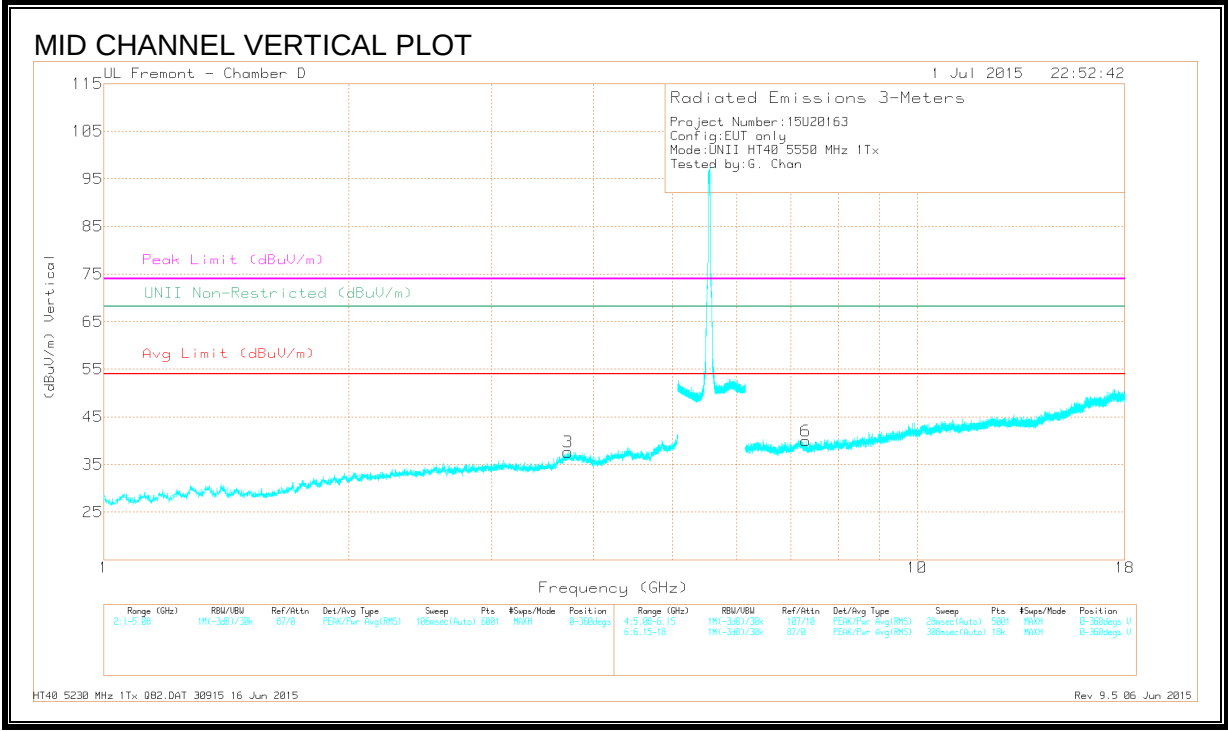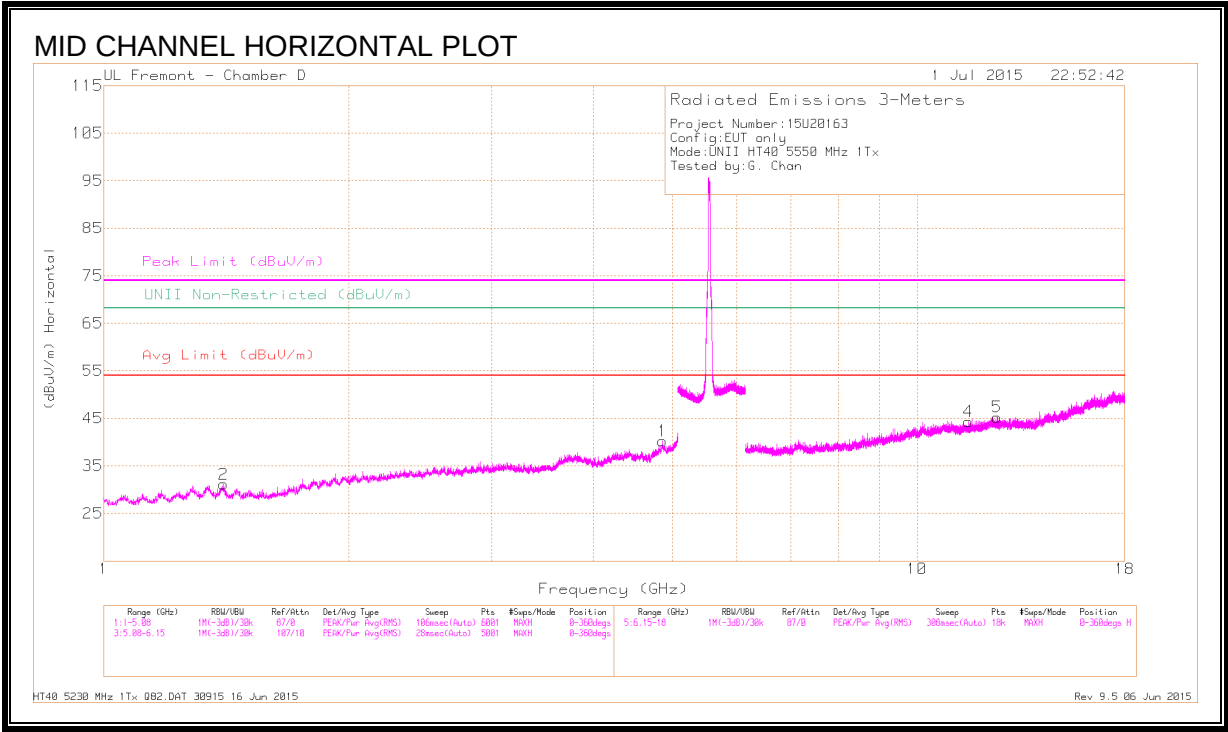

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.865	36.89	PK3	34.1	-25.3	45.69	-	-	74	-28.31	-	-	273	386	H
	* 4.867	25.21	ADR	34.1	-25.2	34.11	54	-19.89	-	-	-	-	273	386	H
2	* 1.404	41.02	PK3	28.6	-31.4	38.22	-	-	74	-35.78	-	-	210	254	H
	* 1.404	28.78	ADR	28.6	-31.4	25.98	54	-28.02	-	-	-	-	210	254	H
3	* 3.722	38.7	PK3	33.2	-29.2	42.7	-	-	74	-31.3	-	-	44	184	V
	* 3.725	26.99	ADR	33.2	-29.2	30.99	54	-23.01	-	-	-	-	44	184	V
4	* 11.561	34.04	PK3	38.1	-22	50.14	-	-	74	-23.86	-	-	11	262	H
	* 11.561	22.72	ADR	38.1	-22	38.82	54	-15.18	-	-	-	-	11	262	H
5	* 12.529	34.6	PK3	39.1	-22.3	51.4	-	-	74	-22.6	-	-	316	306	H
	* 12.529	23.11	ADR	39.1	-22.3	39.91	54	-14.09	-	-	-	-	316	306	H
6	* 7.296	36.6	PK3	35.5	-25.5	46.6	-	-	74	-27.4	-	-	110	216	V
	* 7.299	24.92	ADR	35.5	-25.6	34.82	54	-19.18	-	-	-	-	110	216	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

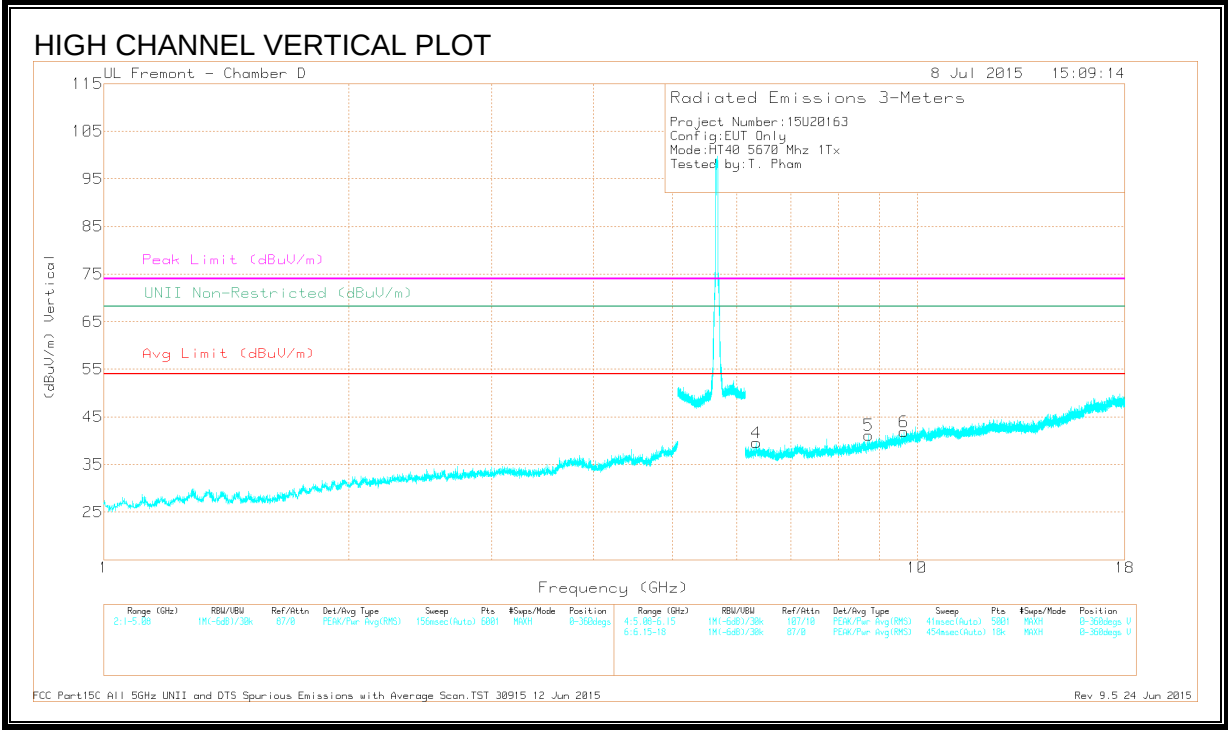
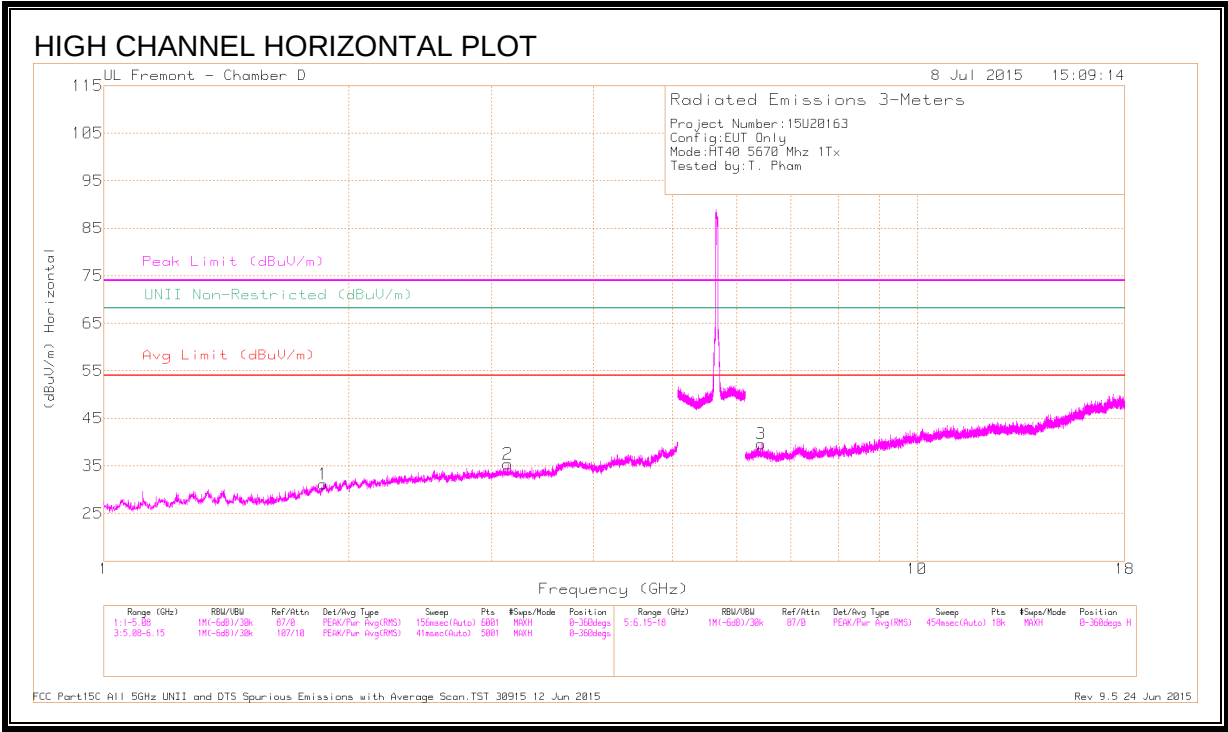


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.863	41.14	PK-U	30.5	-31.4	40.24	-	-	-	-	68.2	-27.96	164	135	H
2	3.14	38.93	PK-U	32.8	-28.7	43.03	-	-	-	-	68.2	-25.17	103	101	H
3	6.345	38.34	PK-U	35.4	-26	47.74	-	-	-	-	68.2	-20.46	298	256	V
4	6.431	36.28	PK-U	35.4	-26.2	45.48	-	-	-	-	68.2	-22.72	346	211	H
5	8.722	35.07	PK-U	35.9	-23.3	47.67	-	-	-	-	68.2	-20.53	13	101	V
6	9.637	34.27	PK-U	36.7	-21.9	49.07	-	-	-	-	68.2	-19.13	176	121	V

PK-U - U-NII: Maximum Peak

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

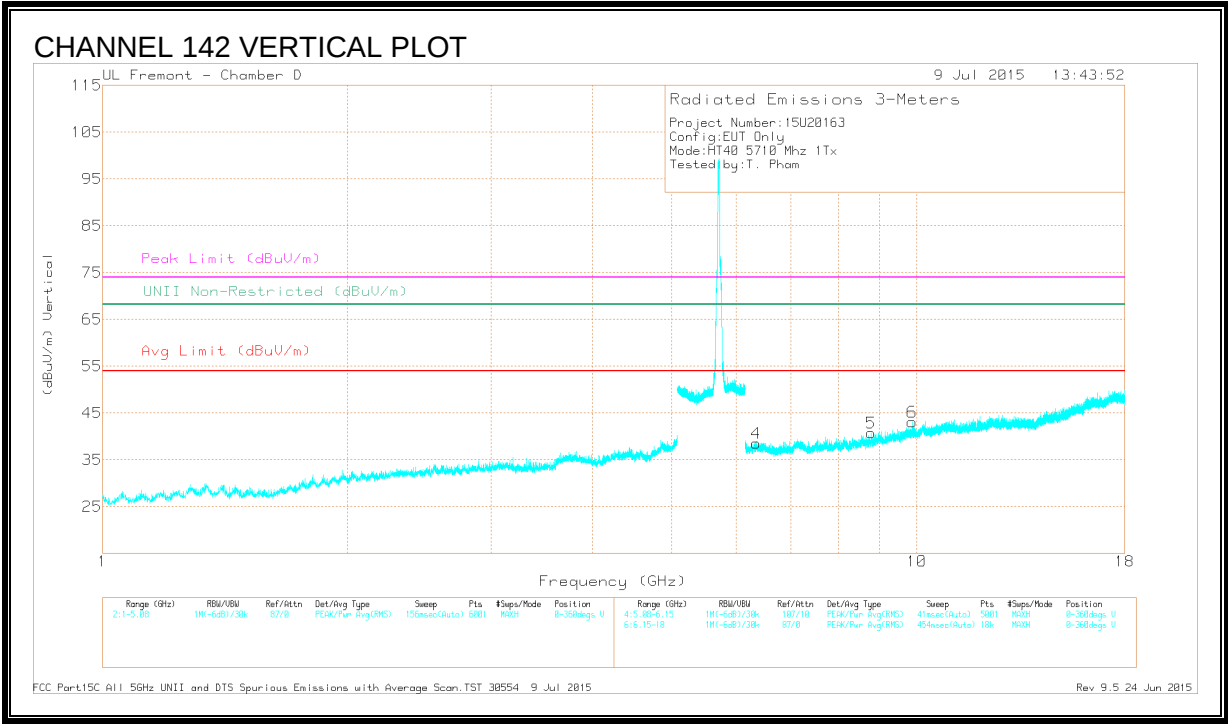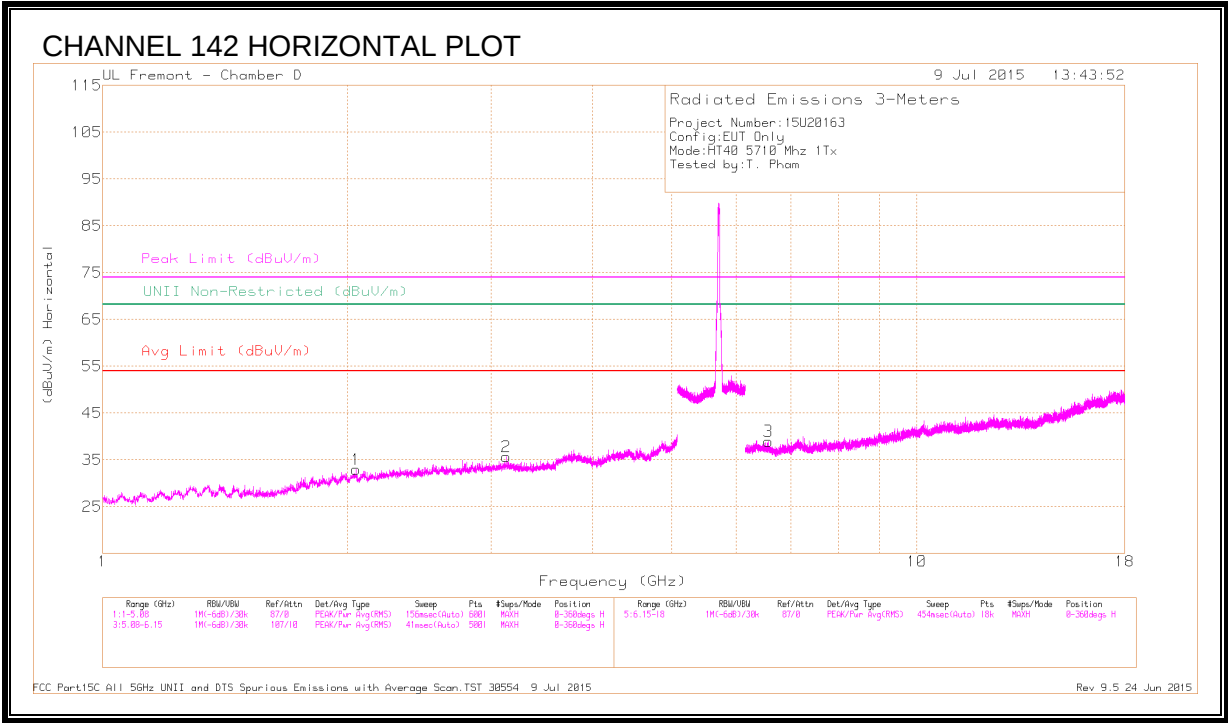


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.049	39.36	PK-U	31.2	-30.5	40.06	-	-	-	-	68.2	-28.14	352	136	H
2	3.131	38.92	PK-U	32.8	-28.7	43.02	-	-	-	-	68.2	-25.18	158	100	H
3	6.344	36.83	PK-U	35.4	-26	46.23	-	-	-	-	68.2	-21.97	125	117	V
4	6.572	36.29	PK-U	35.5	-25.9	45.89	-	-	-	-	68.2	-22.31	240	211	H
5	8.782	34.52	PK-U	35.9	-23.3	47.12	-	-	-	-	68.2	-21.08	327	101	V
6	9.867	34.61	PK-U	37	-21.3	50.31	-	-	-	-	68.2	-17.89	34	121	V

PK-U - U-NII: Maximum Peak

RESTRICTED BANDEDGE, CHAIN 1 (LOW CHANNEL)

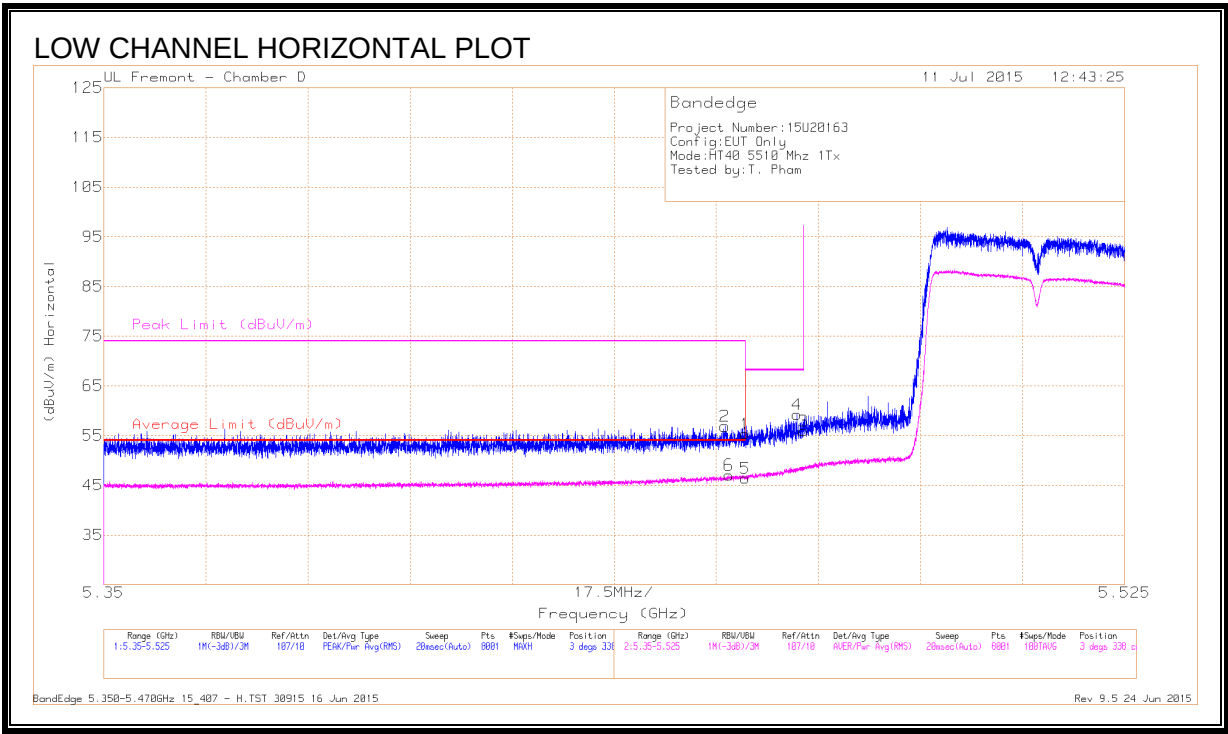


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fi tr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.94	Pk	34.4	-18	55.34	-	-	74	-18.66	3	338	H
2	* 5.456	40.48	Pk	34.4	-18	56.88	-	-	74	-17.12	3	338	H
3	5.47	39.55	Pk	34.4	-18	55.95	-	-	68.2	-12.25	3	338	H
4	5.469	42.85	Pk	34.4	-18	59.25	-	-	68.2	-8.95	3	338	H
5	* 5.46	29.99	RMS	34.4	-18	46.39	54	-7.61	-	-	3	338	H
6	* 5.457	30.65	RMS	34.4	-18	47.05	54	-6.95	-	-	3	338	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

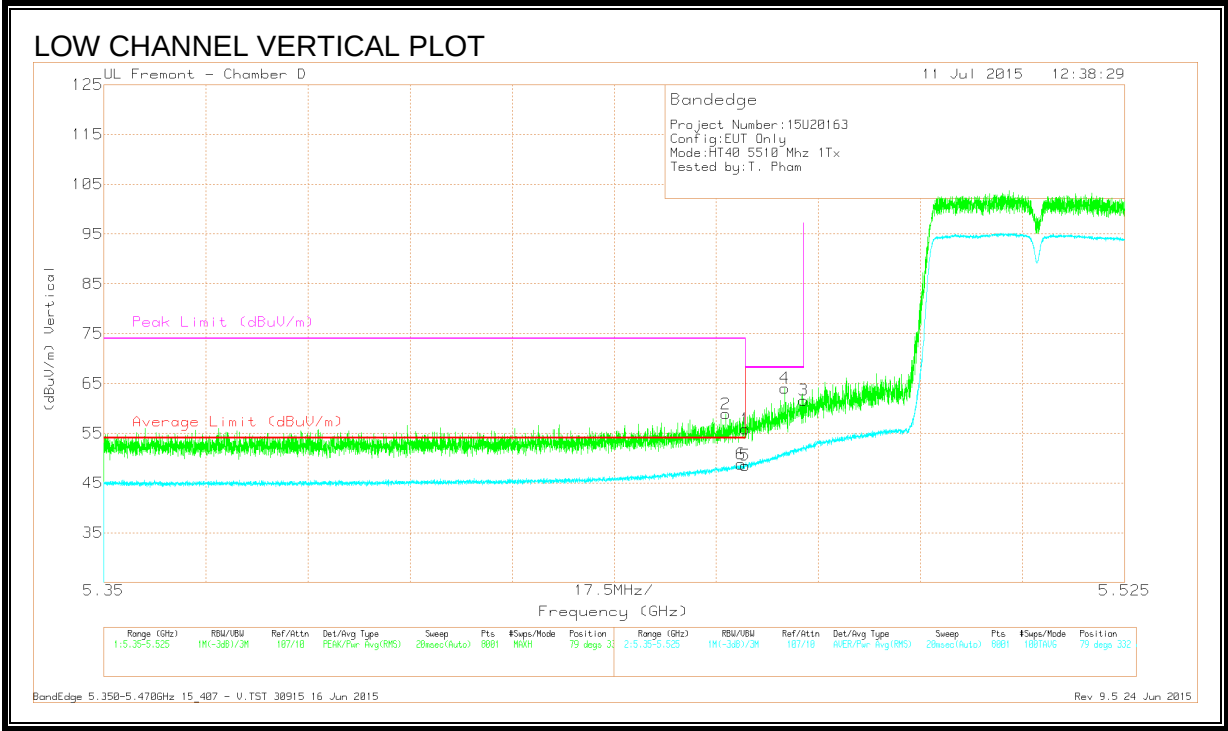

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.44	Pk	34.4	-18	55.84	-	-	74	-18.16	79	332	V
2	* 5.457	42.48	Pk	34.4	-18	58.88	-	-	74	-15.12	79	332	V
3	5.47	45.22	Pk	34.4	-18	61.62	-	-	68.2	-6.58	79	332	V
4	5.467	47.66	Pk	34.4	-18	64.06	-	-	68.2	-4.14	79	332	V
5	* 5.46	32.15	RMS	34.4	-18	48.55	54	-5.45	-	-	79	332	V
6	* 5.459	32.41	RMS	34.4	-18	48.81	54	-5.19	-	-	79	332	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE, CHAIN 1 (HIGH CHANNEL)

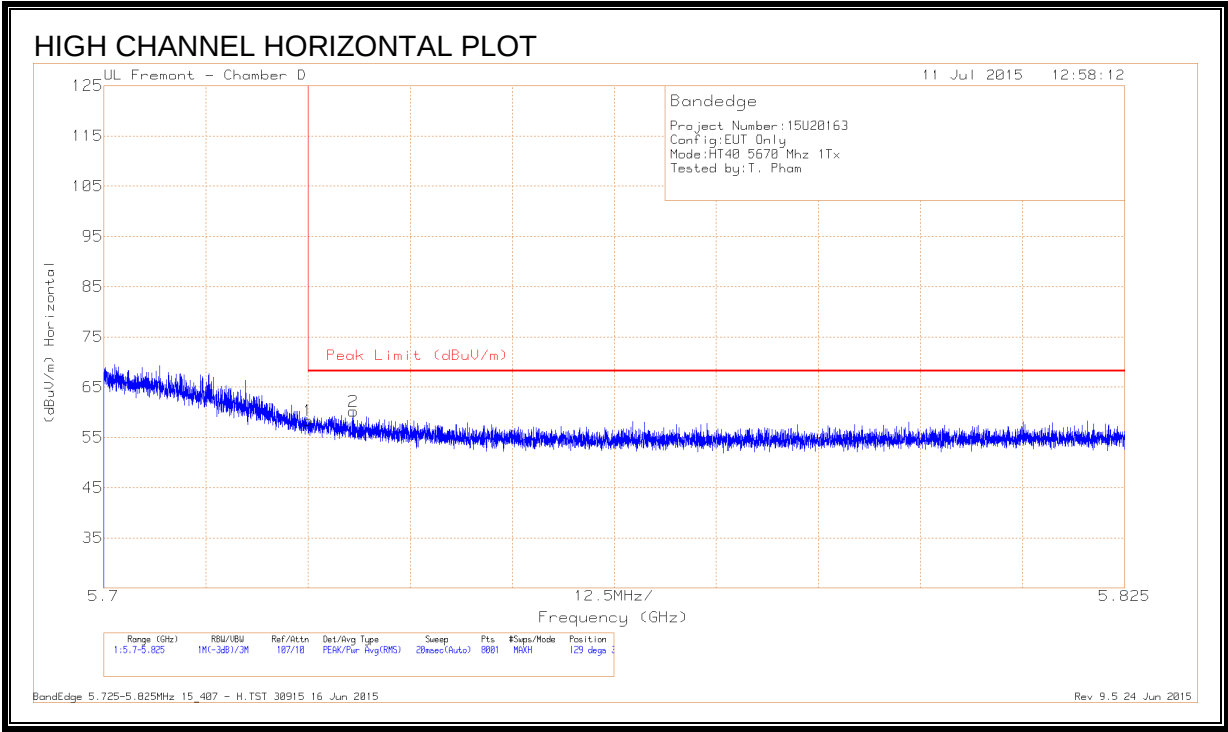

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT344 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.38	Pk	34.6	-17.6	58.38	68.2	-9.82	129	303	H
2	5.731	43.19	Pk	34.6	-17.6	60.19	68.2	-8.01	129	303	H

Pk - Peak detector


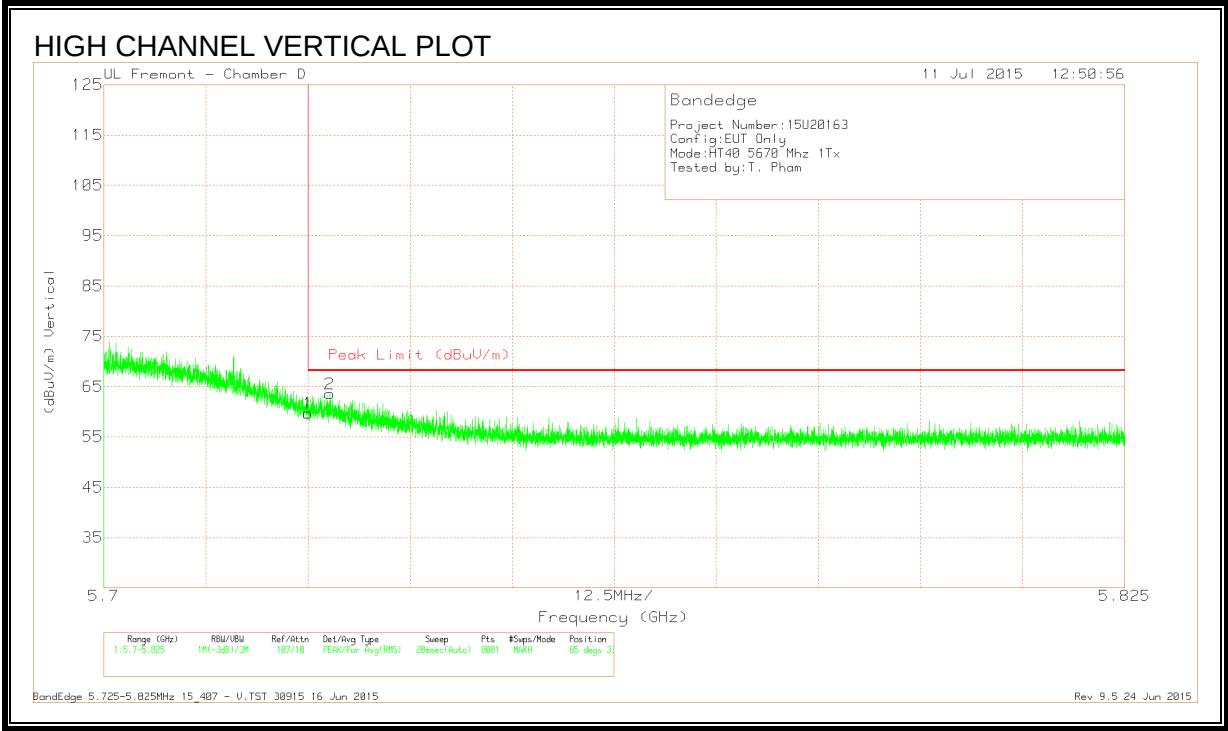


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.72	Pk	34.6	-17.6	59.72	68.2	-8.48	65	334	V
2	5.728	46.59	Pk	34.6	-17.6	63.59	68.2	-4.61	65	334	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

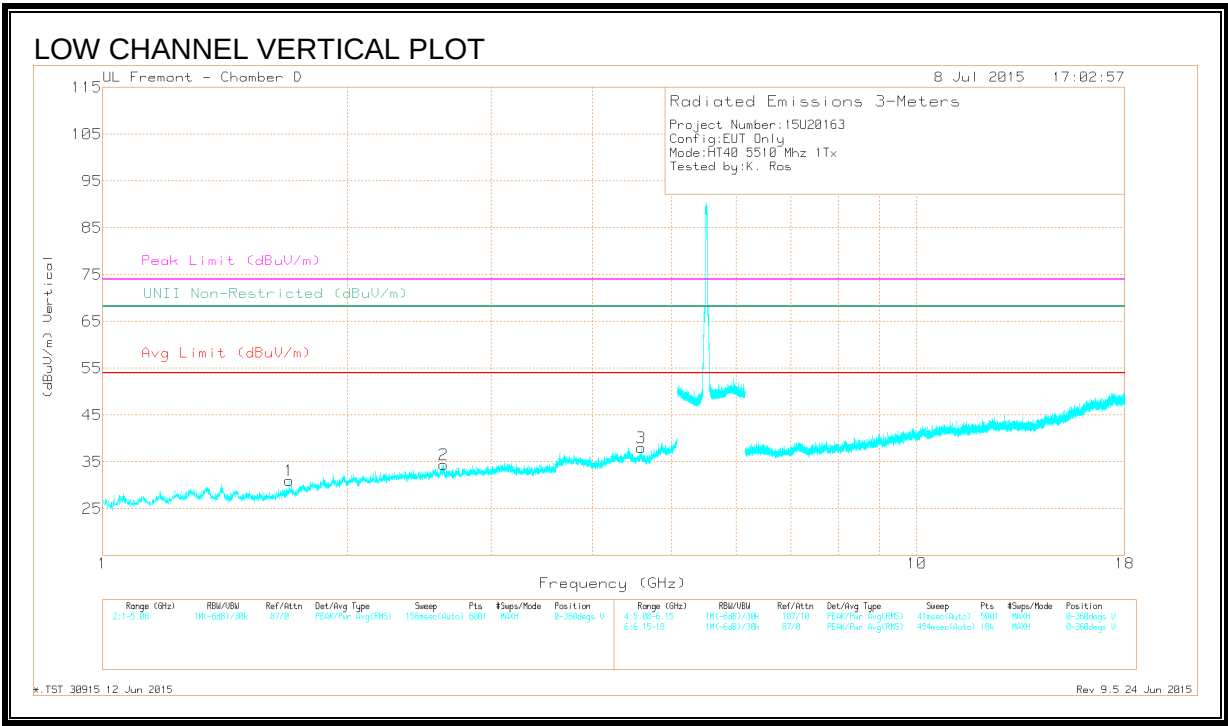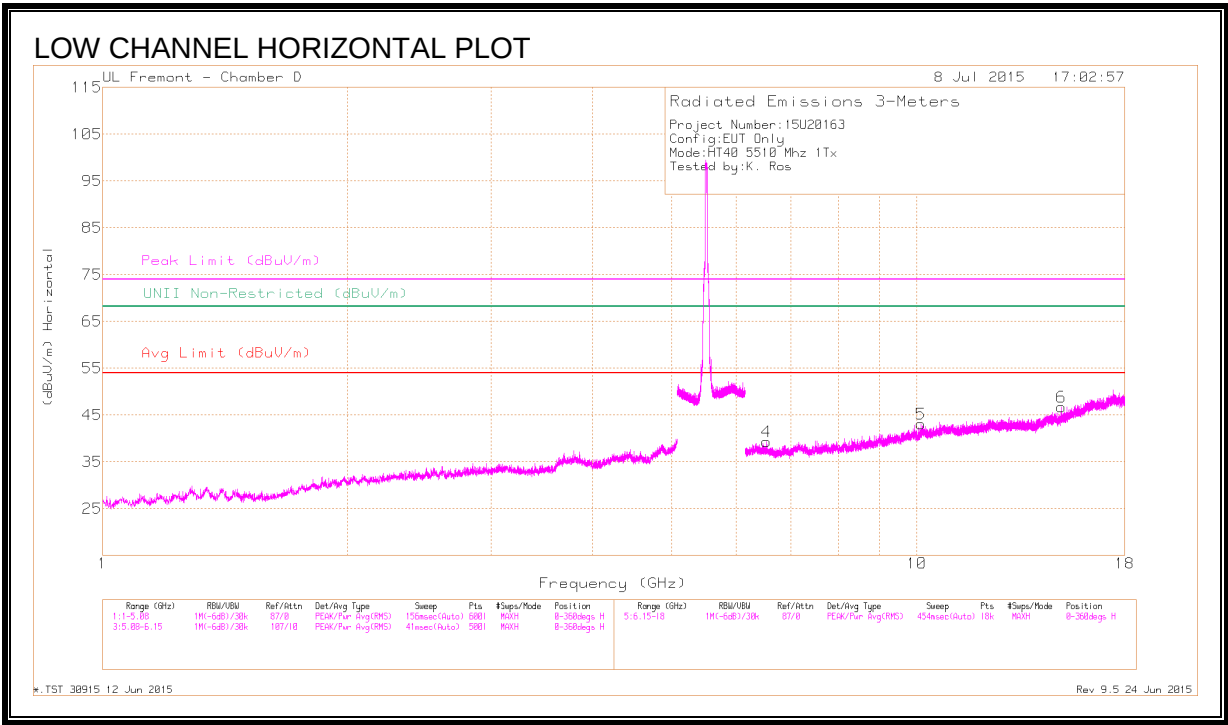

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fil r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.695	40.66	PK-U	28.7	-31.1	38.26	-	-	74	-35.74	-	-	238	142	V
	* 1.695	28.9	ADR	28.7	-31.1	26.5	54	-27.5	-	-	-	-	238	142	V
2	2.622	39.31	PK-U	32.4	-30	41.71	-	-	-	-	68.2	-26.49	189	127	V
3	* 4.587	38.74	PK-U	34.1	-27.1	45.74	-	-	74	-28.26	-	-	138	160	V
	* 4.587	26.98	ADR	34.1	-27.1	33.98	54	-20.02	-	-	-	-	138	160	V
4	6.54	36.54	PK-U	35.5	-25.6	46.44	-	-	-	-	68.2	-21.76	189	213	H
5	10.111	34.21	PK-U	37.1	-21.1	50.21	-	-	-	-	68.2	-17.99	150	237	H
6	15.044	35.62	PK-U	39.8	-21.9	53.52	-	-	-	-	68.2	-14.68	263	190	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

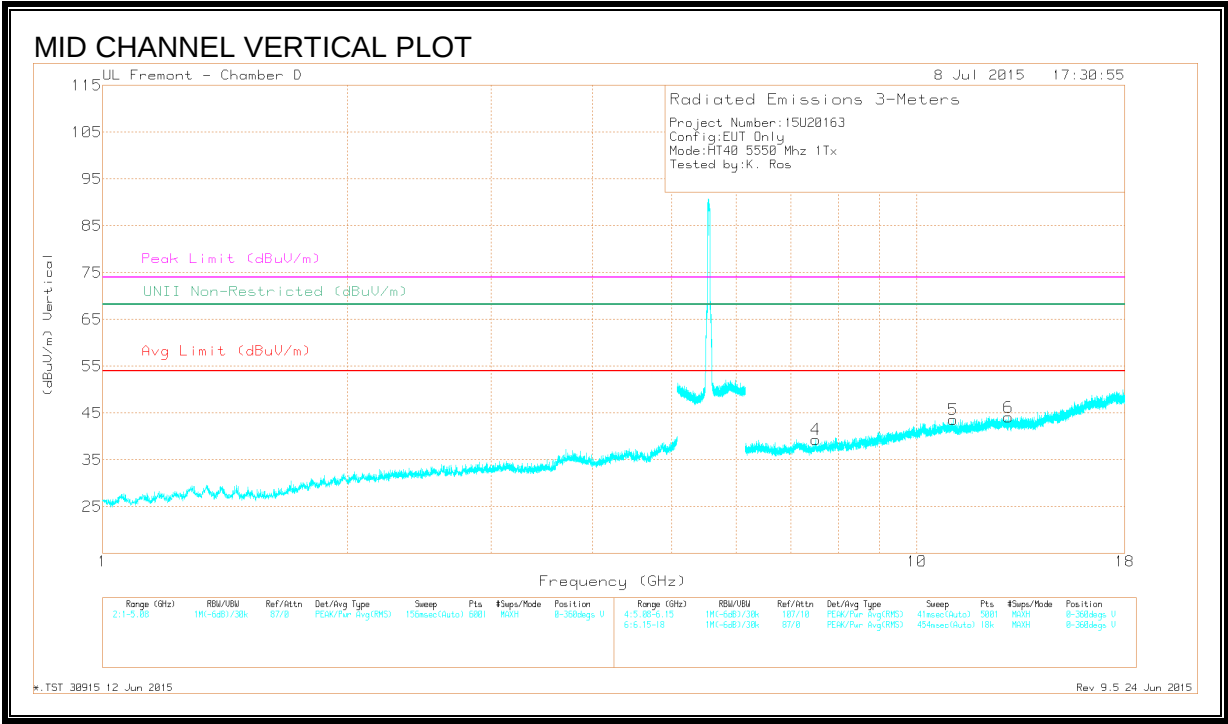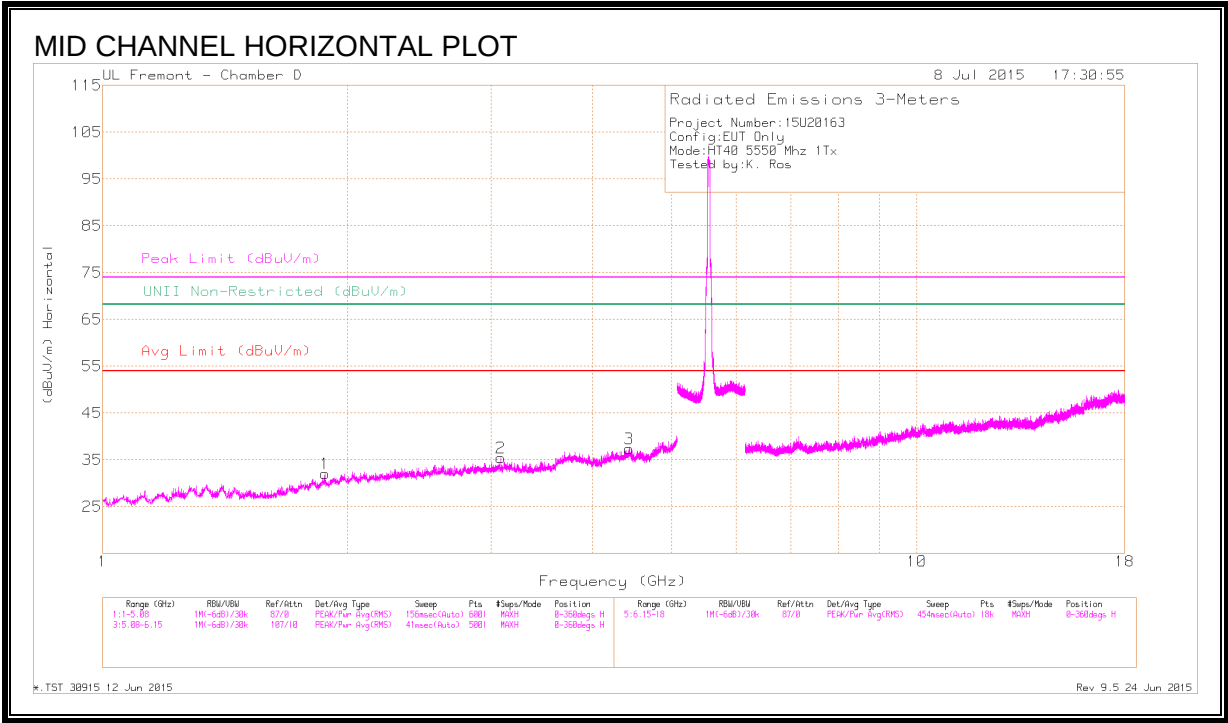

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.875	40.13	PK-U	30.6	-31.4	39.33	-	-	-	-	68.2	-28.87	295	135	H
2	3.082	38.83	PK-U	32.9	-29.2	42.53	-	-	-	-	68.2	-25.67	327	167	H
3	4.433	37.99	PK-U	33.9	-27.5	44.39	-	-	-	-	68.2	-23.81	229	178	H
4	* 7.515	35.41	PK-U	35.5	-24.5	46.41	-	-	74	-27.59	-	-	122	238	V
	* 7.513	24.48	ADR	35.5	-24.4	35.58	54	-18.42	-	-	-	-	122	238	V
5	* 11.078	34	PK-U	38	-21.5	50.5	-	-	74	-23.5	-	-	180	206	V
	* 11.078	23.31	ADR	38	-21.5	39.81	54	-14.19	-	-	-	-	180	206	V
6	12.97	35.88	PK-U	39.1	-22.6	52.38	-	-	-	-	68.2	-15.82	97	175	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

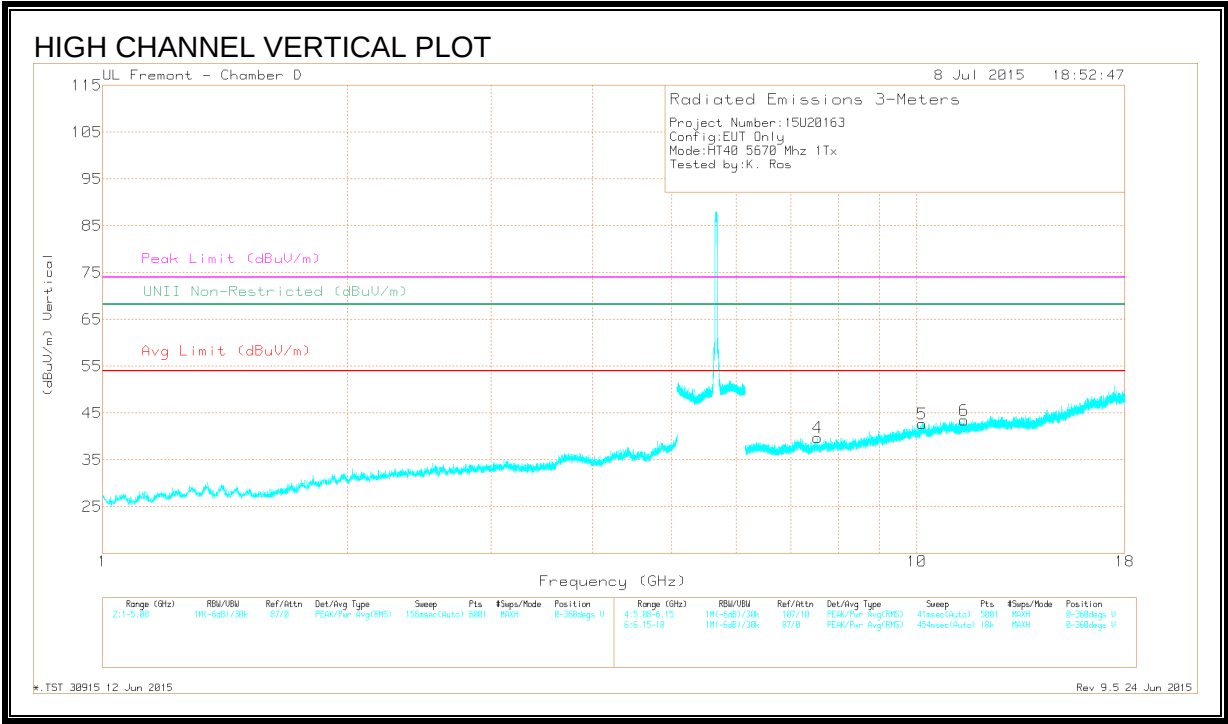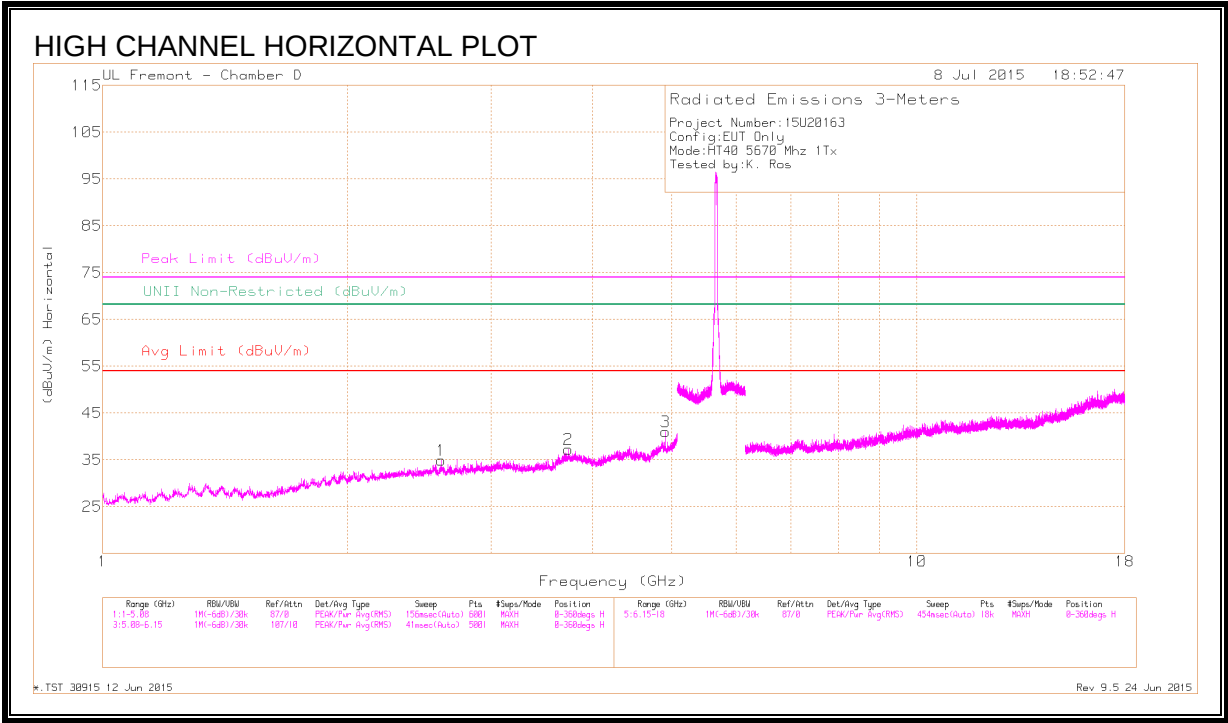

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.602	39.8	PK-U	32.4	-29.9	42.3	-	-	-	-	68.2	-25.9	249	134	H
2	* 3.732	39.17	PK-U	33.2	-29.2	43.17	-	-	74	-30.83	-	-	193	182	H
	* 3.736	27.47	ADR	33.2	-29.1	31.57	54	-22.43	-	-	-	-	193	182	H
3	* 4.915	38.11	PK-U	34.1	-26.4	45.81	-	-	74	-28.19	-	-	234	244	H
	* 4.914	27.83	ADR	34.1	-26.4	35.53	54	-18.47	-	-	-	-	234	244	H
4	* 7.55	36.6	PK-U	35.5	-25	47.1	-	-	74	-26.9	-	-	188	204	V
	* 7.551	24.48	ADR	35.5	-25	34.98	54	-19.02	-	-	-	-	188	204	V
5	10.153	34.22	PK-U	37.1	-20.7	50.62	-	-	-	-	68.2	-17.58	190	155	V
6	* 11.427	34.28	PK-U	38	-21.5	50.78	-	-	74	-23.22	-	-	132	181	V
	* 11.425	22.96	ADR	38	-21.5	39.46	54	-14.54	-	-	-	-	132	181	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

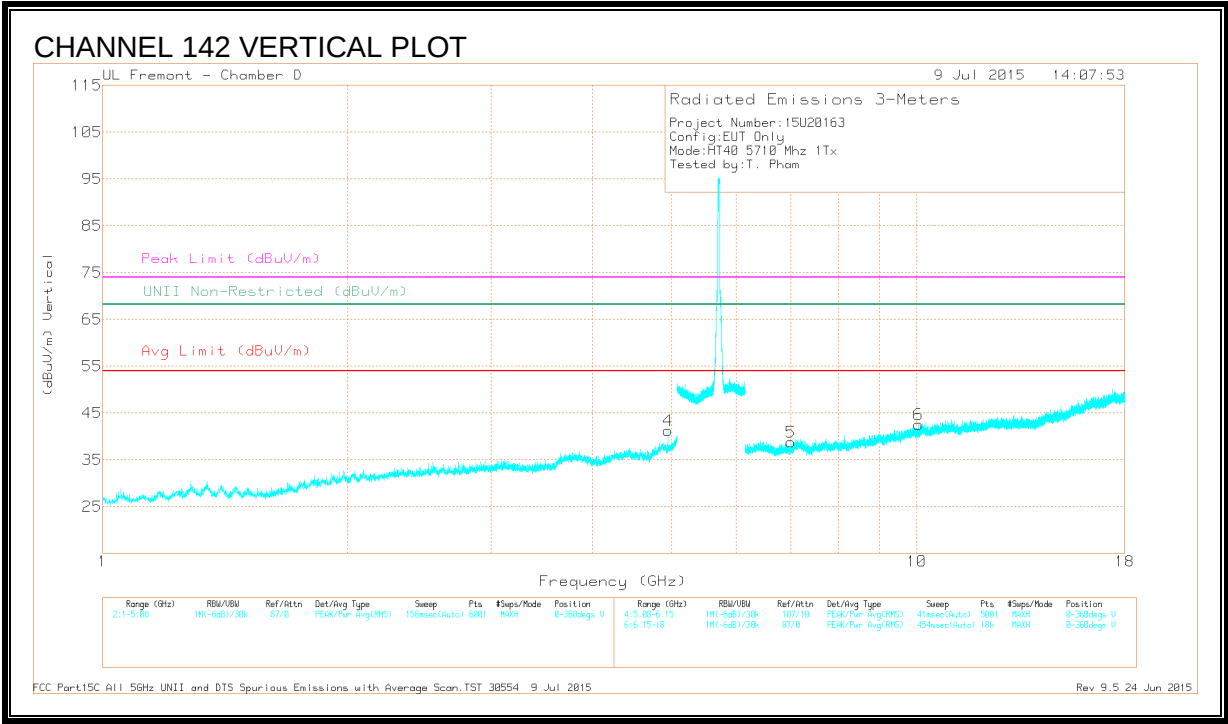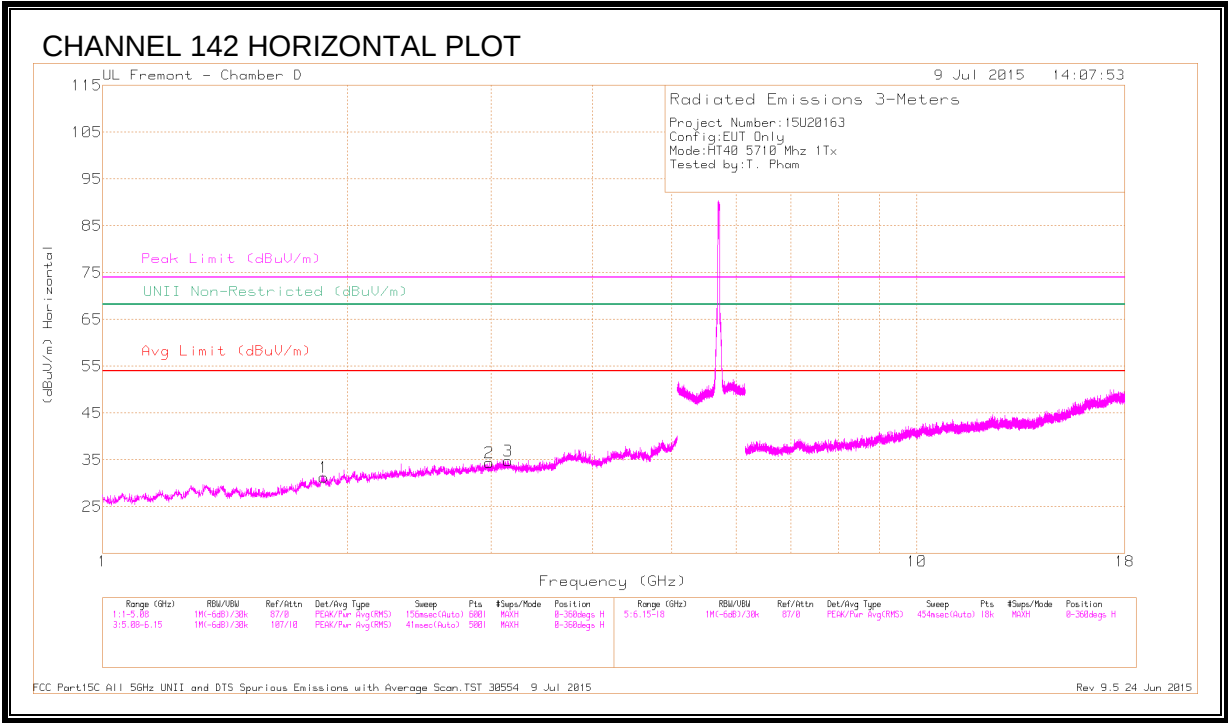

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fil tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.871	40.55	PK-U	30.6	-31.4	39.75	-	-	-	-	68.2	-28.45	244	102	H
2	2.98	39.52	PK-U	32.9	-30.2	42.22	-	-	-	-	68.2	-25.98	139	154	H
3	3.145	38.75	PK-U	32.7	-28.7	42.75	-	-	-	-	68.2	-25.45	56	122	H
4	* 4.949	40.86	PK-U	34.2	-26.9	48.16	-	-	74	-25.84	-	-	51	153	V
	* 4.949	32.55	ADR	34.2	-26.9	40.06	54	-13.94	-	-	-	-	51	153	V
5	7.002	36.69	PK-U	35.5	-26.2	45.99	-	-	-	-	68.2	-22.21	121	263	V
6	10.053	33.91	PK-U	37.1	-21.8	49.21	-	-	-	-	68.2	-18.99	121	263	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.17. 802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

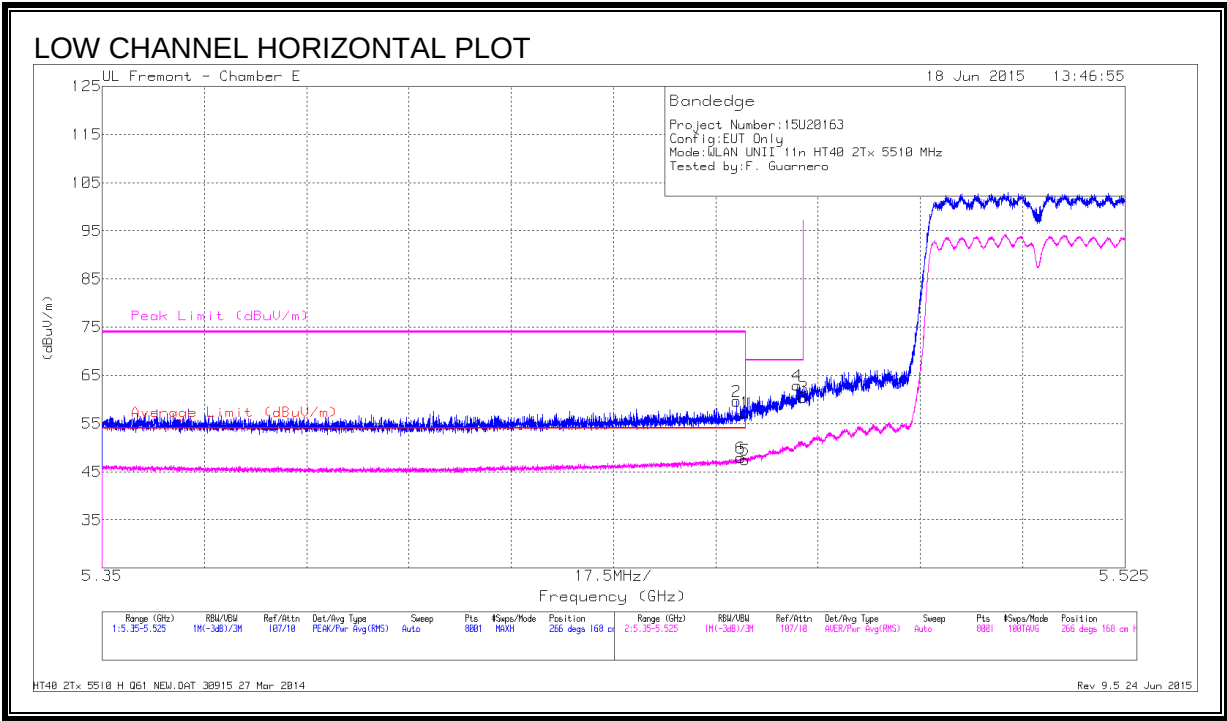


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.99	Pk	34.6	-21.3	57.29	-	-	74	-16.71	266	168	H
2	* 5.459	46.45	Pk	34.6	-21.4	59.65	-	-	74	-14.35	266	168	H
3	5.47	47.14	Pk	34.6	-21.3	60.44	-	-	68.2	-7.76	266	168	H
4	5.469	49.62	Pk	34.6	-21.3	62.92	-	-	68.2	-5.28	266	168	H
5	* 5.46	34.17	RMS	34.6	-21.3	47.47	54	-6.53	-	-	266	168	H
6	* 5.459	34.73	RMS	34.6	-21.4	47.93	54	-6.07	-	-	266	168	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

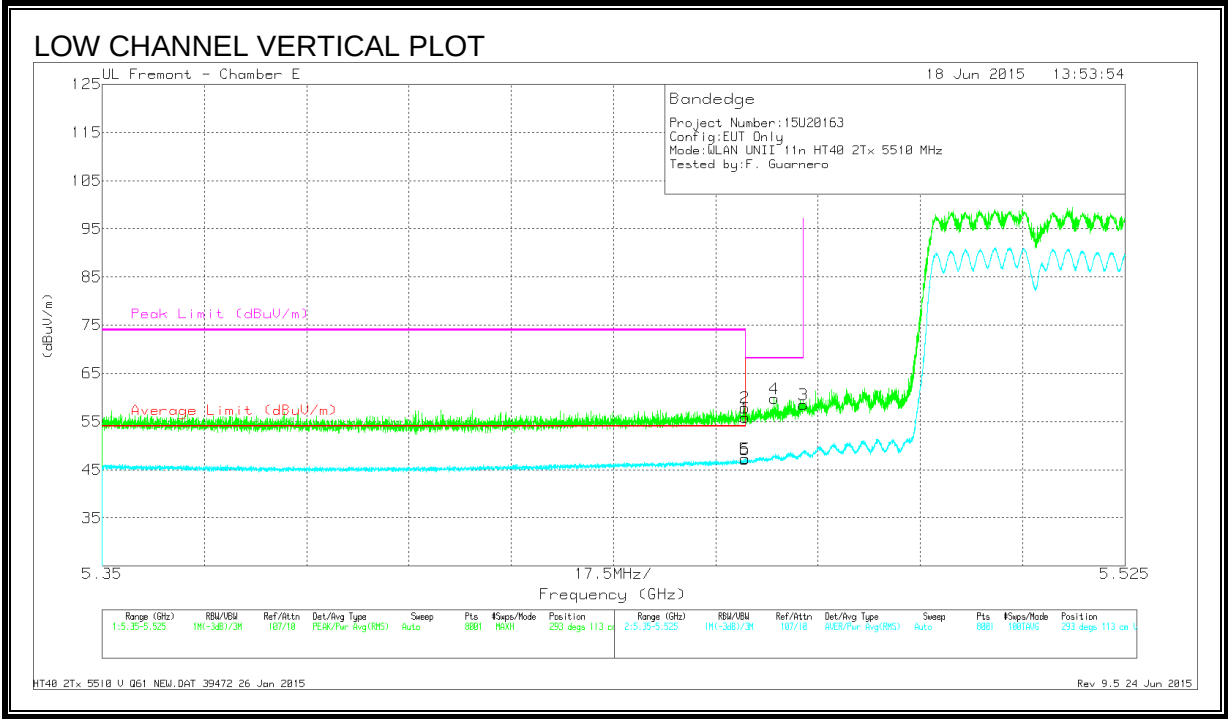

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.51	Pk	34.6	-21.3	55.81	-	-	74	-18.19	293	113	V
2	* 5.46	44.55	Pk	34.6	-21.3	57.85	-	-	74	-16.15	293	113	V
3	5.47	45.22	Pk	34.6	-21.3	58.52	-	-	68.2	-9.68	293	113	V
4	5.465	46.48	Pk	34.6	-21.3	59.78	-	-	68.2	-8.42	293	113	V
5	* 5.46	34.03	RMS	34.6	-21.3	47.33	54	-6.67	-	-	293	113	V
6	* 5.46	33.89	RMS	34.6	-21.3	47.19	54	-6.81	-	-	293	113	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

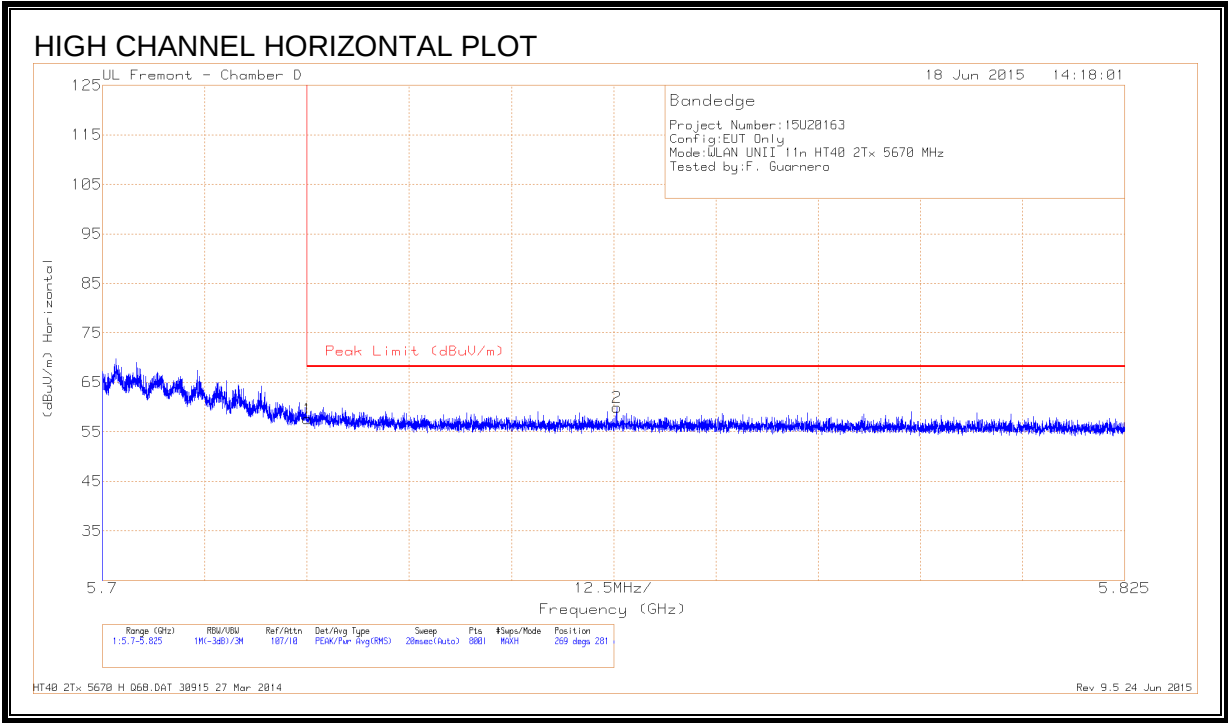

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.92	Pk	34.7	-21	57.62	68.2	-10.58	269	281	H
2	5.763	45.94	Pk	34.8	-20.8	59.94	68.2	-8.26	269	281	H

Pk - Peak detector


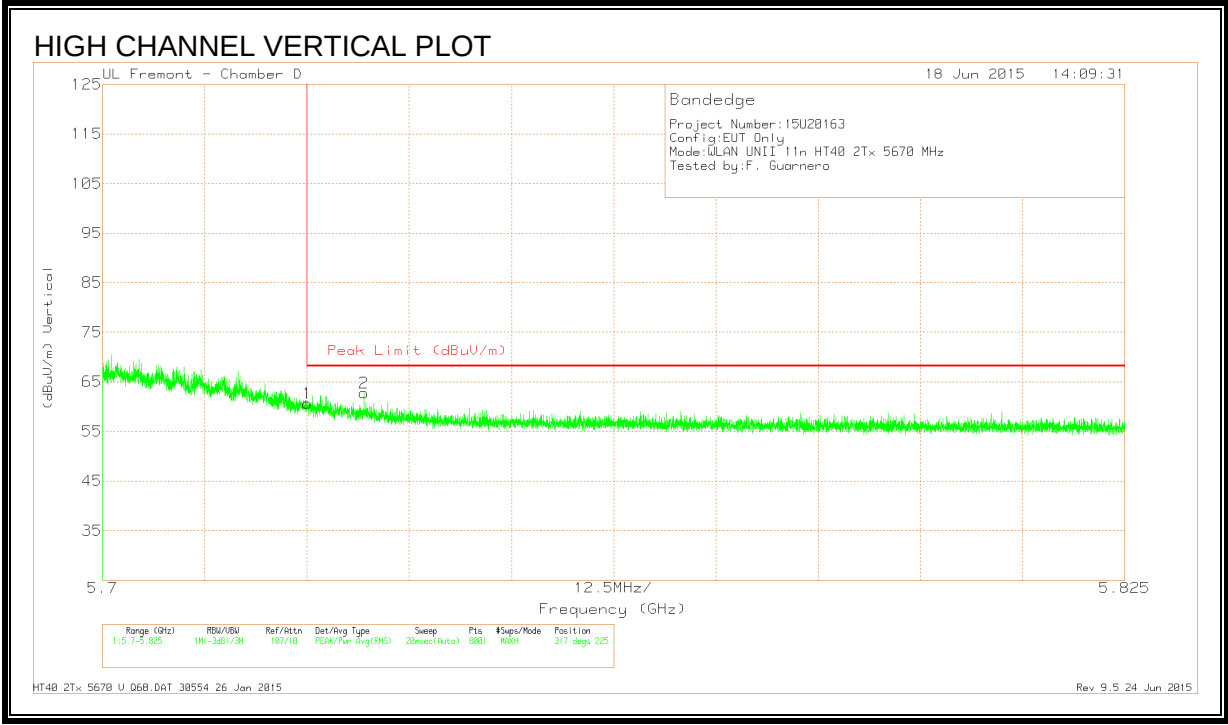


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.98	Pk	34.7	-21	60.68	68.2	-7.52	317	225	V
2	5.732	48.95	Pk	34.7	-20.9	62.75	68.2	-5.45	317	225	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

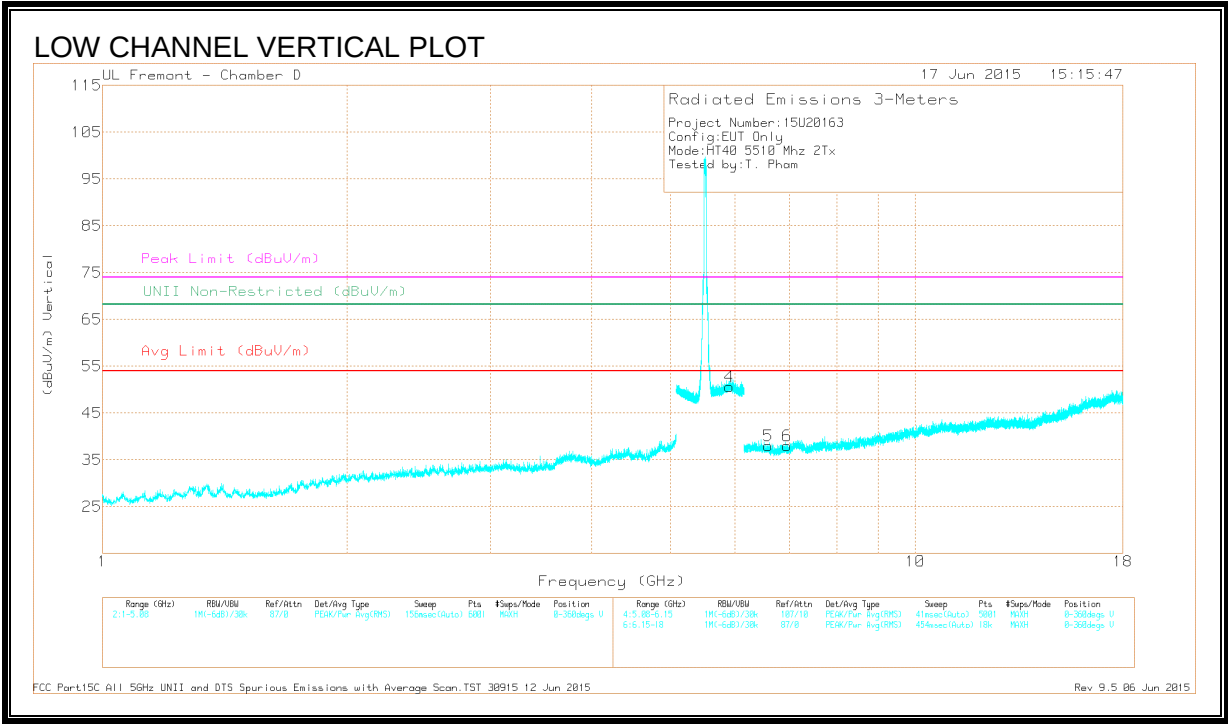
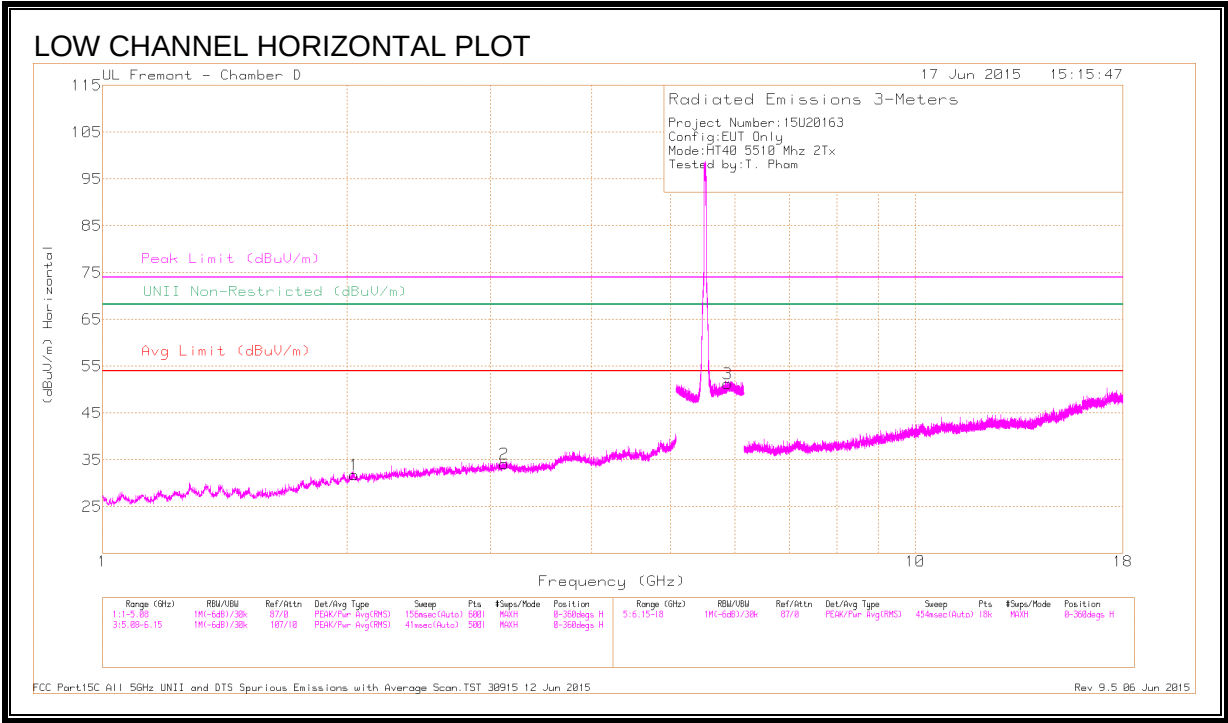


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.04	39.87	PK3	31.2	-30.5	40.57	-	-	-	-	68.2	-27.63	332	210	H
2	3.123	39	PK3	32.8	-28.8	43	-	-	-	-	68.2	-25.2	36	101	H
3	5.876	41.87	PK3	35	-17.5	59.37	-	-	-	-	68.2	-8.83	255	109	H
4	5.905	41.57	PK3	35.1	-17.5	59.17	-	-	-	-	68.2	-9.03	102	101	V
5	6.594	36.2	PK3	35.5	-25.8	45.9	-	-	-	-	68.2	-22.3	305	175	V
6	6.951	36.4	PK3	35.5	-25.9	46	-	-	-	-	68.2	-22.2	240	101	V

PK3 - U-NII: Maximum Peak

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

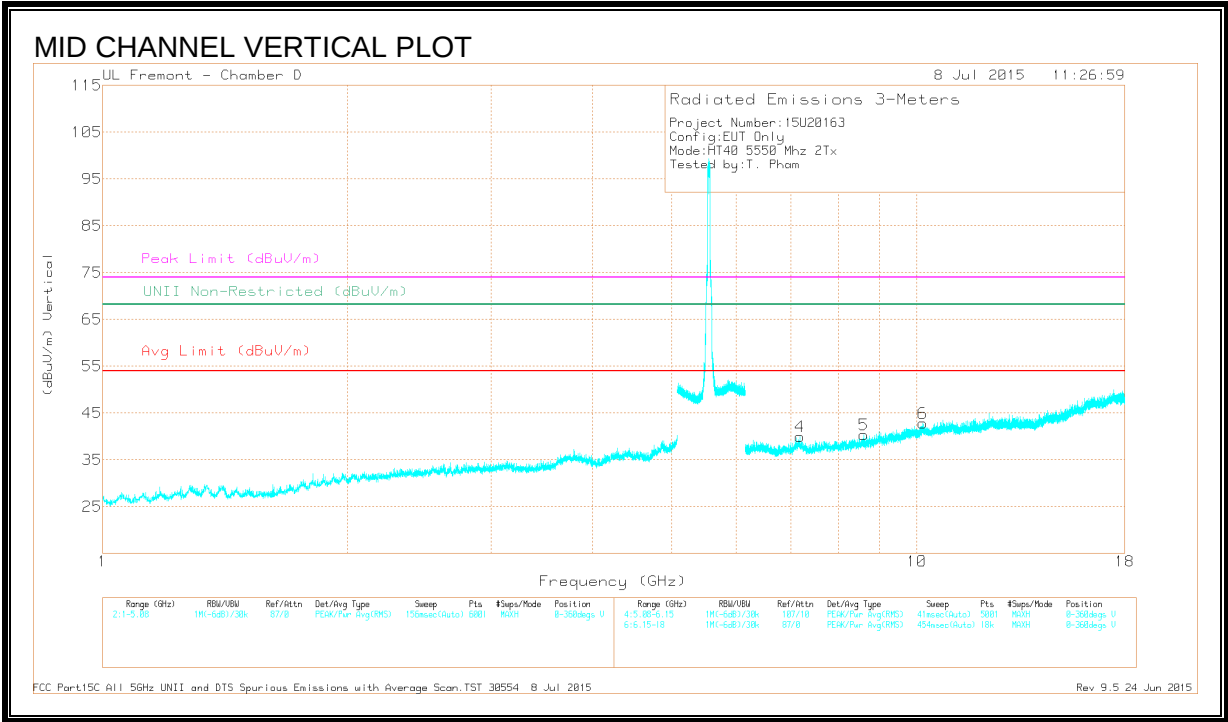
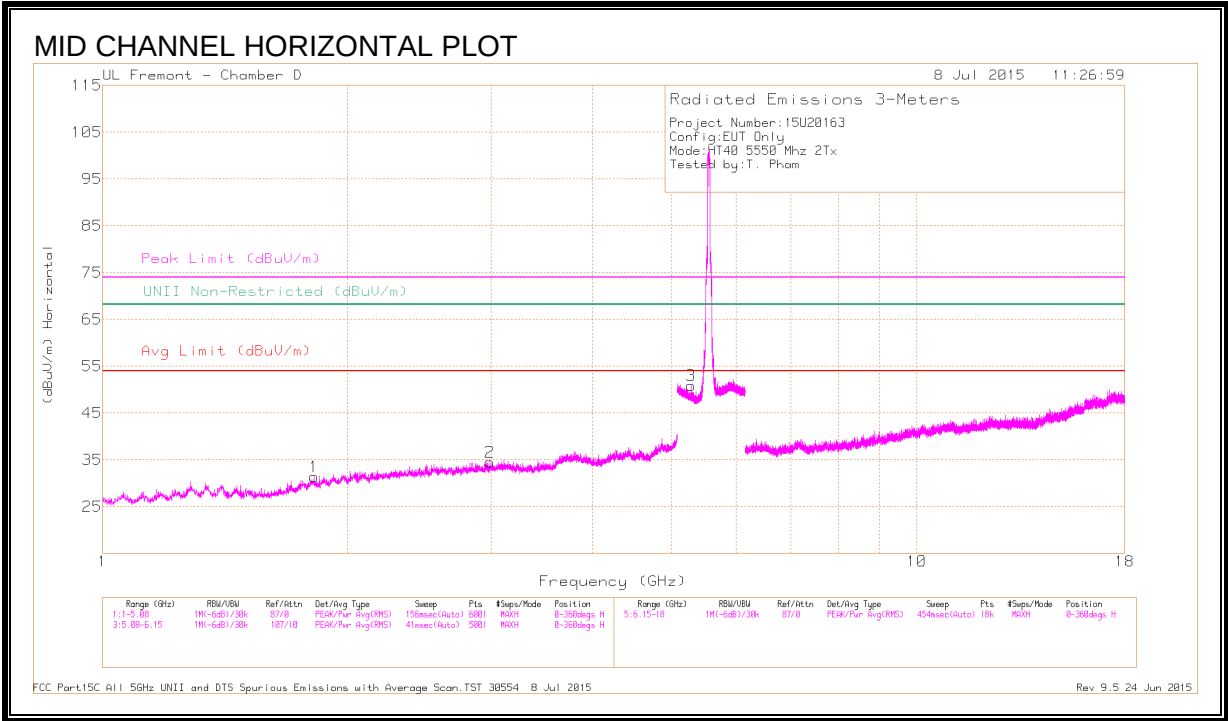


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.82	40.45	PK-U	30.3	-31.3	39.45	-	-	-	-	68.2	-28.75	332	215	H
2	2.989	39.8	PK-U	32.9	-30.3	42.4	-	-	-	-	68.2	-25.8	25	133	H
3	5.285	41.46	PK-U	34.3	-18.1	57.66	-	-	-	-	68.2	-10.54	107	105	H
4	7.181	35.7	PK-U	35.5	-24.4	46.8	-	-	-	-	68.2	-21.4	98	220	V
5	8.606	34.76	PK-U	35.8	-22.8	47.76	-	-	-	-	68.2	-20.44	185	111	V
6	10.168	33.62	PK-U	37.2	-20.5	50.32	-	-	-	-	68.2	-17.88	56	101	V

PK-U - U-NII: Maximum Peak

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

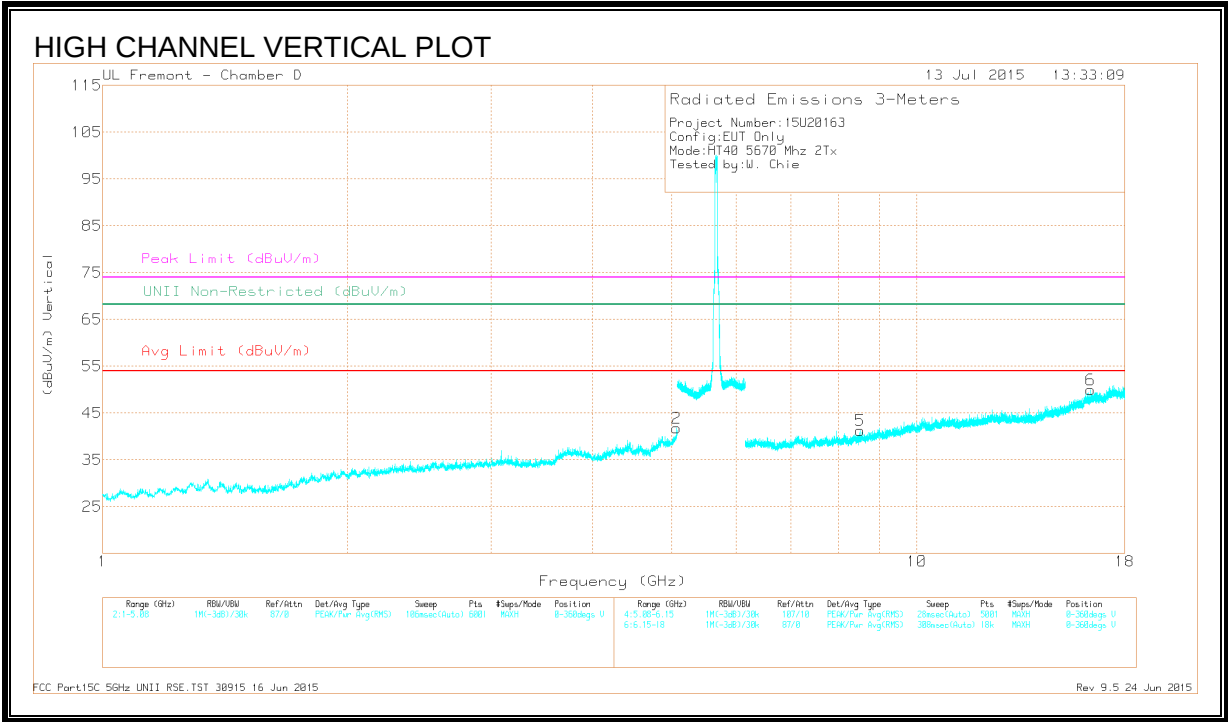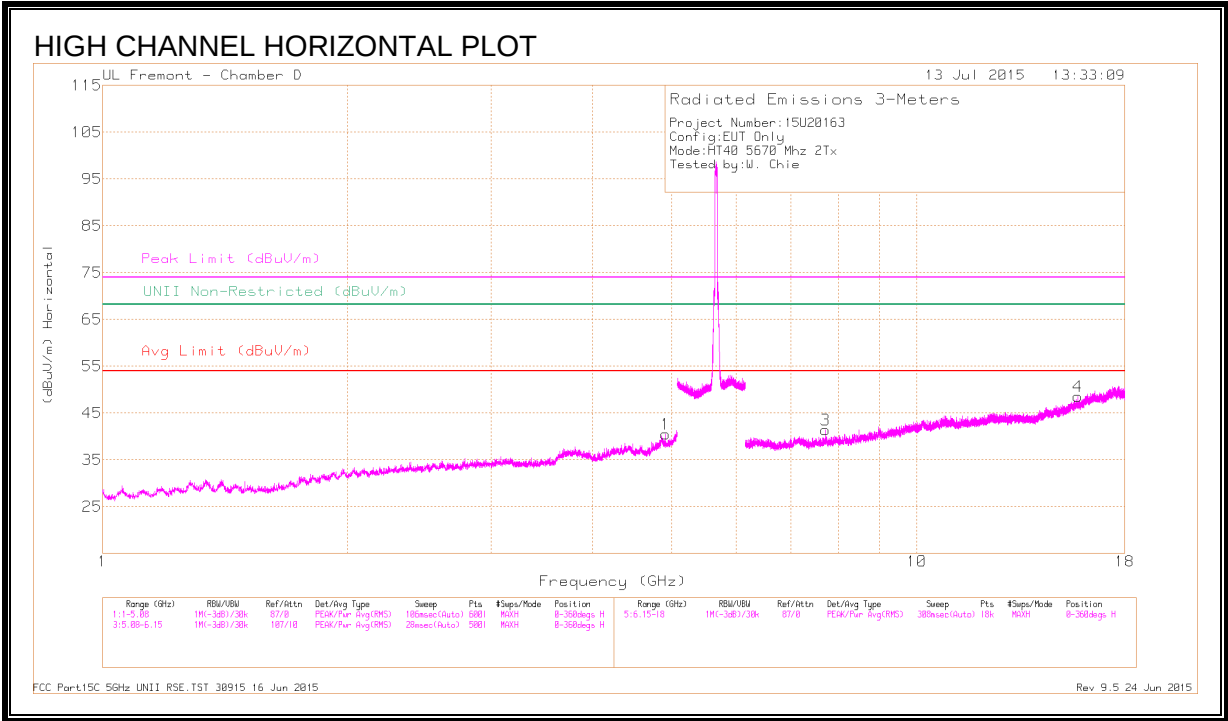

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.915	38.01	PK-U	34.1	-26.4	45.71	-	-	74	-28.29	-	-	88	249	H
	* 4.914	26.27	ADR	34.1	-26.4	33.97	54	-20.03	-	-	-	-	88	249	H
2	* 5.07	39.17	PK-U	34.2	-25.5	47.87	-	-	74	-26.13	-	-	264	347	V
	* 5.07	27.04	ADR	34.2	-25.5	35.74	54	-18.26	-	-	-	-	264	347	V
3	* 7.727	36.29	PK-U	35.6	-24.3	47.59	-	-	74	-26.41	-	-	299	311	H
	* 7.728	23.95	ADR	35.6	-24.3	35.25	54	-18.75	-	-	-	-	299	311	H
4	* 15.757	35.95	PK-U	40.9	-20.9	55.95	-	-	74	-18.05	-	-	293	215	H
	* 15.756	22.98	ADR	40.9	-20.9	42.98	54	-11.02	-	-	-	-	293	215	H
5	8.514	36.23	PK-U	35.8	-24.2	47.83	-	-	-	-	68.2	-20.37	222	186	V
6	16.354	34.59	PK-U	41.6	-19.7	56.49	-	-	-	-	68.2	-11.71	172	240	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

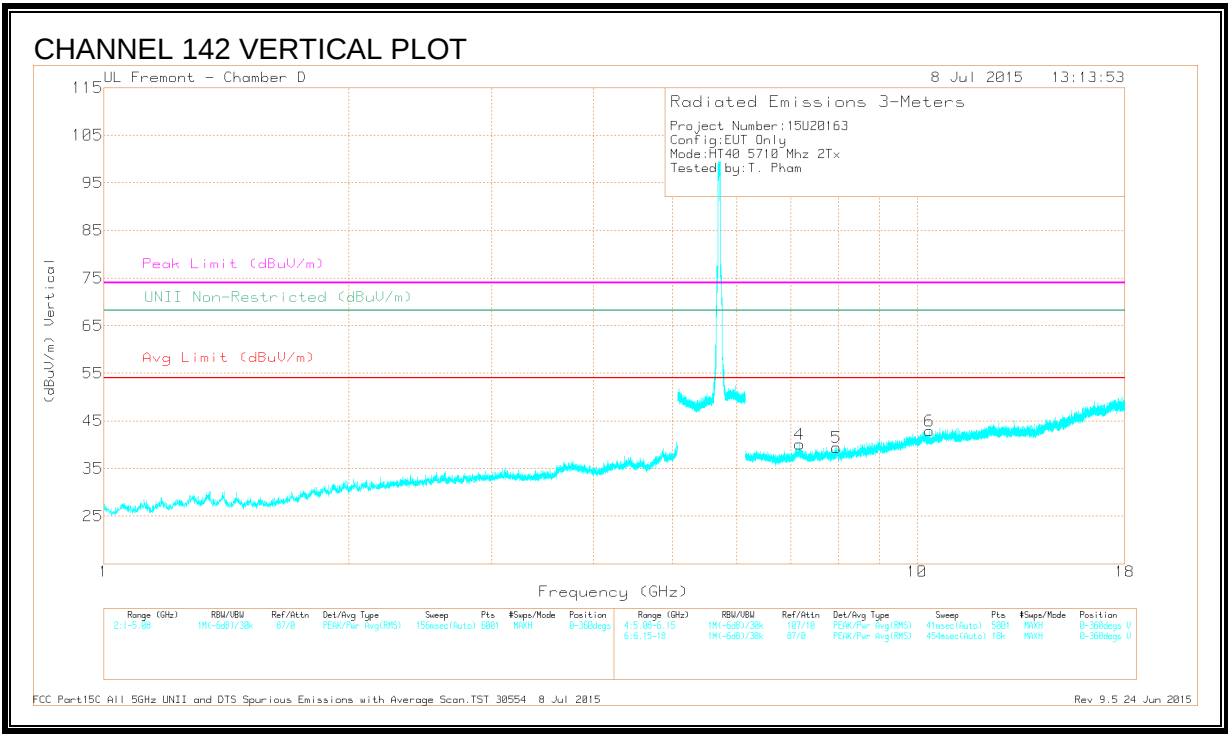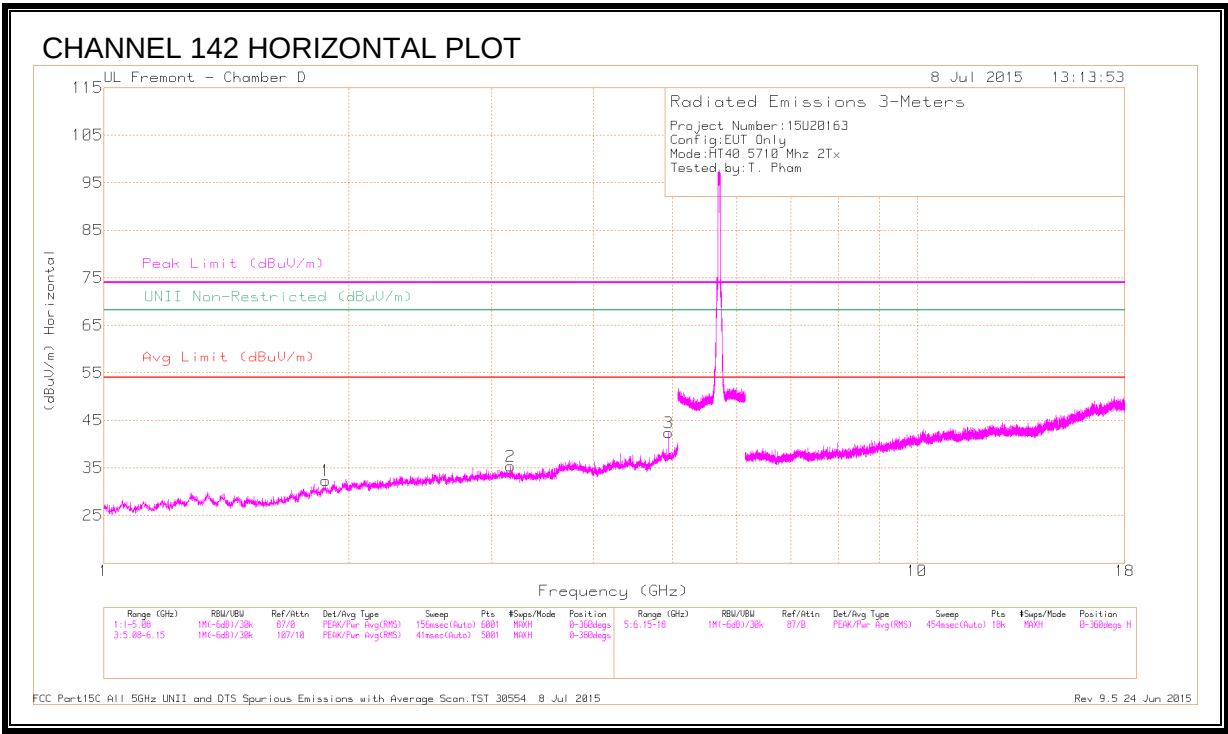

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.874	40.5	PK-U	30.6	-31.4	39.7	-	-	-	-	68.2	-28.5	235	100	H
2	3.165	39.24	PK-U	32.7	-29	42.94	-	-	-	-	68.2	-25.26	35	105	H
3	* 4.949	40.68	PK-U	34.2	-26.9	47.98	-	-	74	-26.02	-	-	6	110	H
	* 4.949	31.84	ADR	34.2	-26.9	39.14	54	-14.86	-	-	-	-	6	110	H
4	7.173	35.82	PK-U	35.5	-24.2	47.12	-	-	-	-	68.2	-21.08	239	210	V
5	7.962	35.05	PK-U	35.7	-23.9	46.85	-	-	-	-	68.2	-21.35	354	105	V
6	10.357	34.13	PK-U	37.3	-21.7	49.73	-	-	-	-	68.2	-18.47	321	110	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.18. 802.11ac VHT80 1TX MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

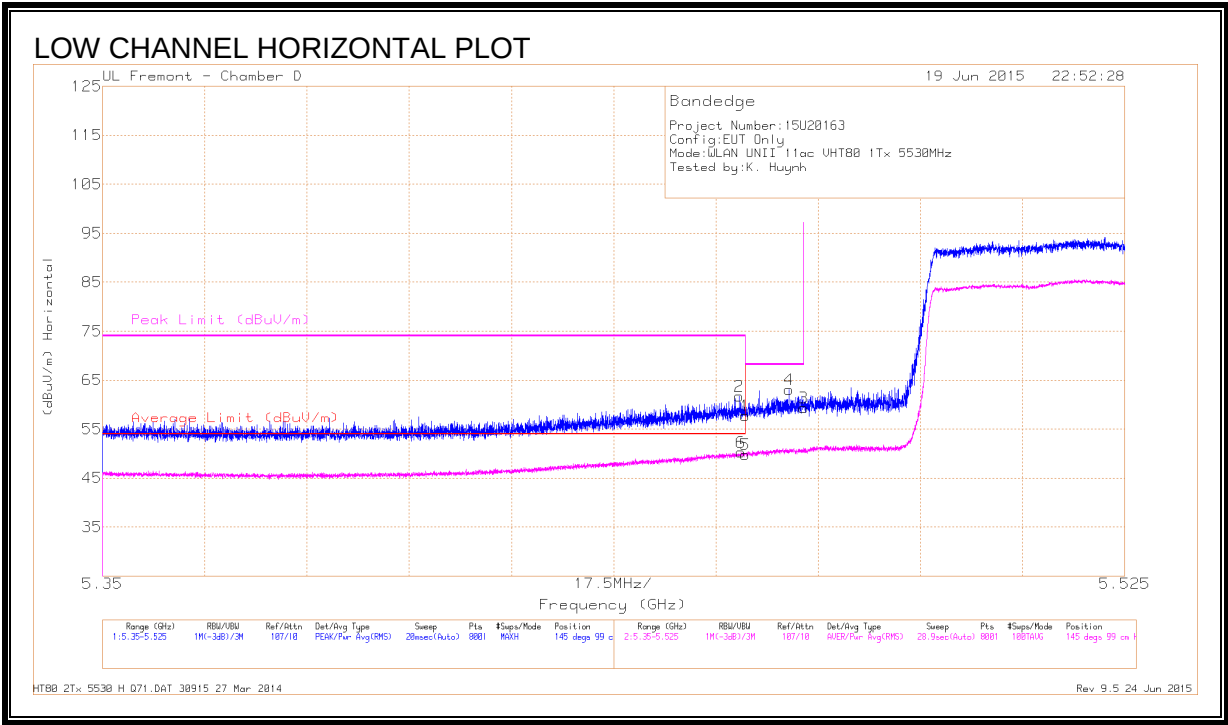


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	44.45	Pk	34.6	-21.3	0	57.75	-	-	74	-16.25	145	99	H
2	* 5.459	48.53	Pk	34.6	-21.4	0	61.73	-	-	74	-12.27	145	99	H
3	5.47	46.08	Pk	34.6	-21.3	0	59.38	-	-	68.2	-8.82	145	99	H
4	5.468	49.81	Pk	34.6	-21.3	0	63.11	-	-	68.2	-5.09	145	99	H
5	* 5.46	36.27	RMS	34.6	-21.3	.18	49.75	54	-4.25	-	-	145	99	H
6	* 5.459	36.89	RMS	34.6	-21.4	.18	50.27	54	-3.73	-	-	145	99	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

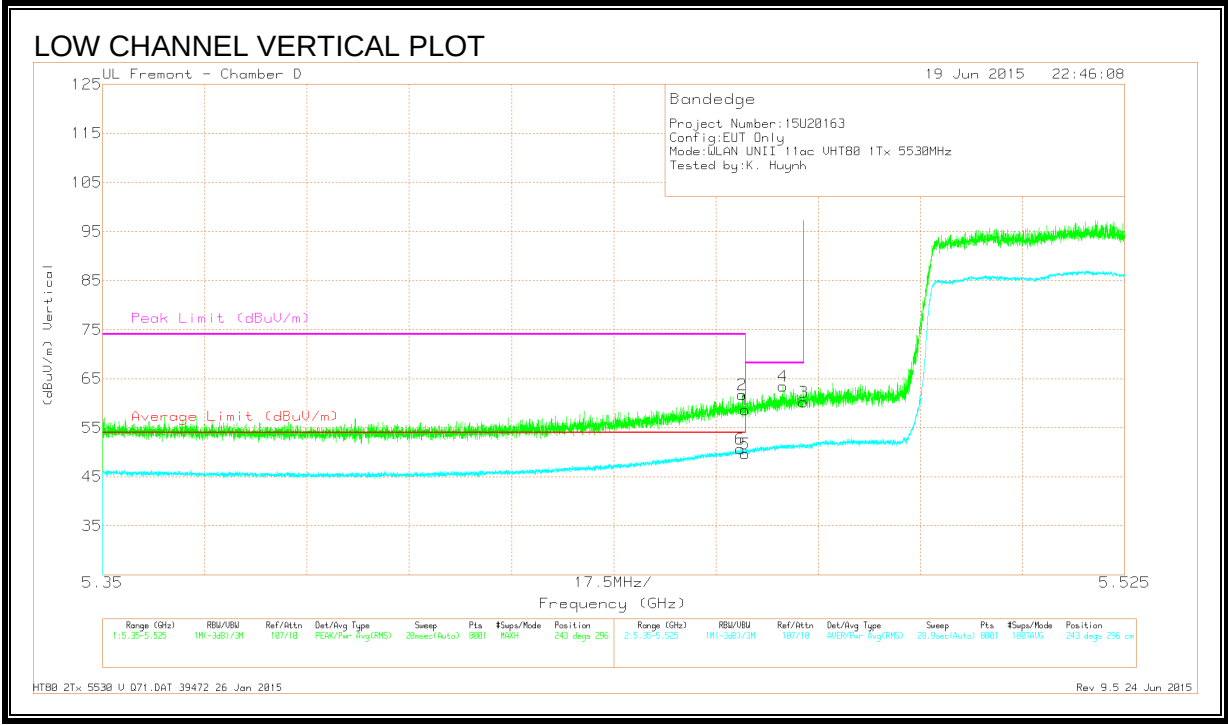

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.29	Pk	34.6	-21.3	0	58.59	-	-	74	-15.41	243	296	V
2	* 5.46	48.4	Pk	34.6	-21.3	0	61.7	-	-	74	-12.3	243	296	V
3	5.47	46.92	Pk	34.6	-21.3	0	60.22	-	-	68.2	-7.98	243	296	V
4	5.466	50.12	Pk	34.6	-21.3	0	63.42	-	-	68.2	-4.78	243	296	V
5	* 5.46	36.15	RMS	34.6	-21.3	.18	49.63	54	-4.37	-	-	243	296	V
6	* 5.459	37.2	RMS	34.6	-21.4	.18	50.58	54	-3.42	-	-	243	296	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

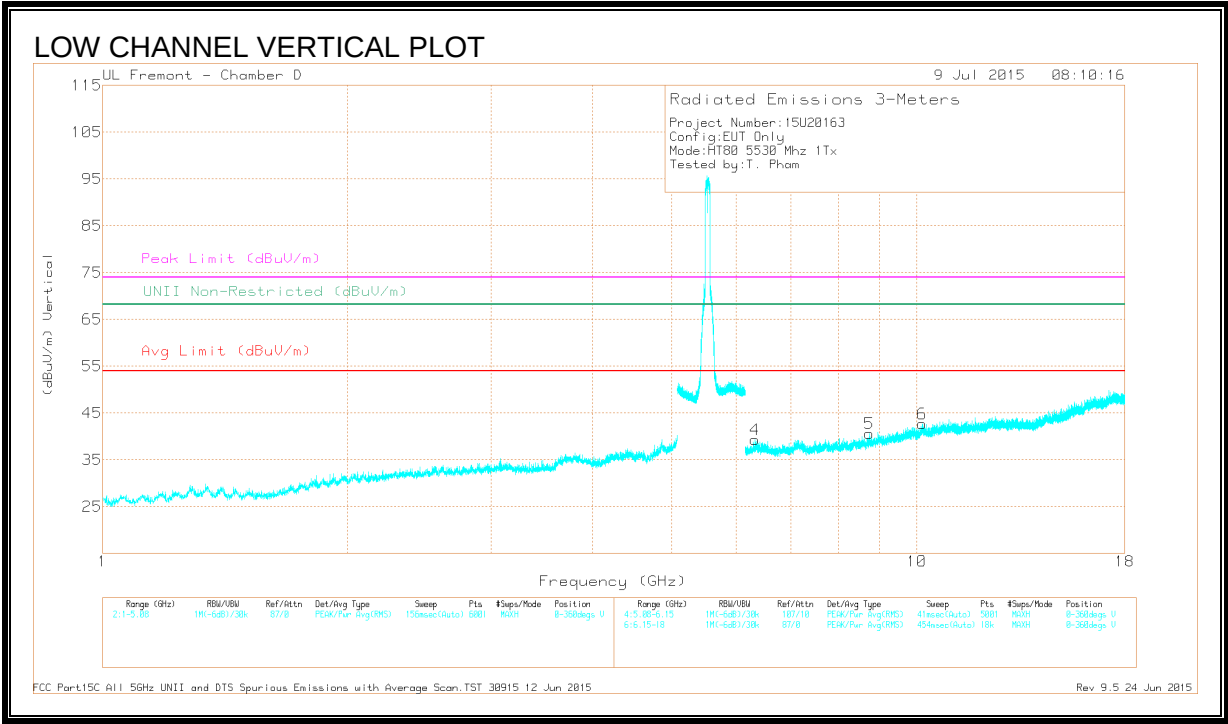
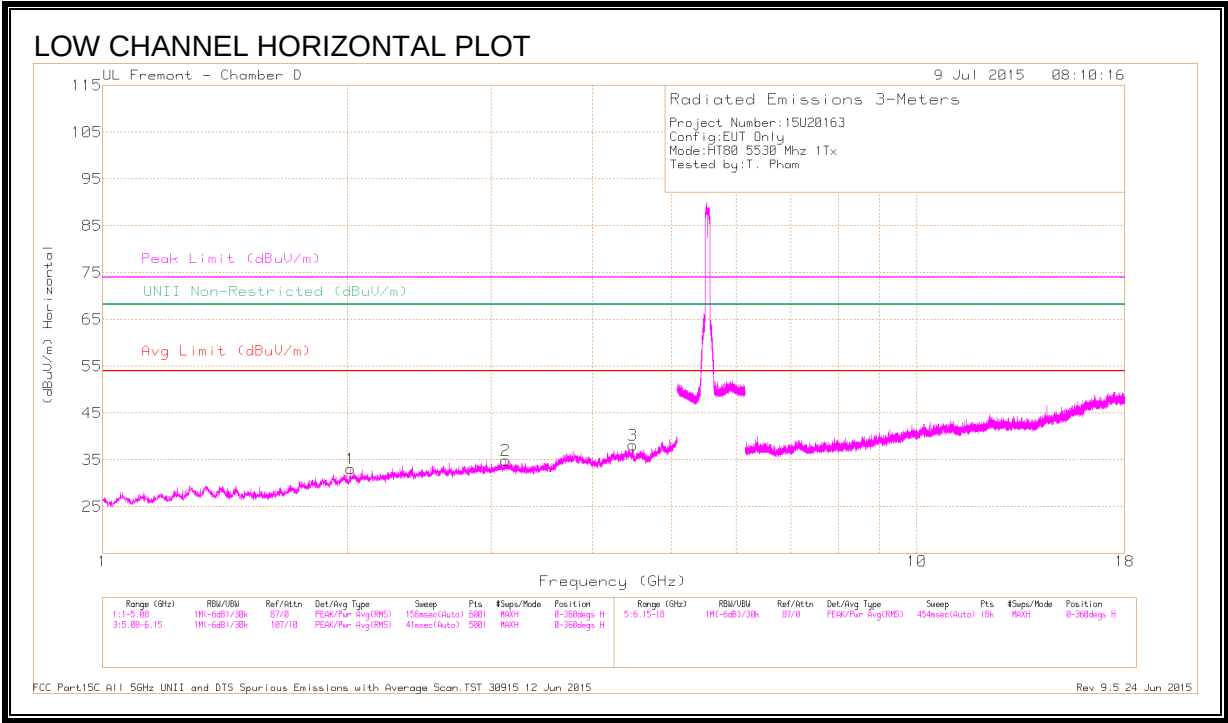


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.015	39.84	PK-U	31.1	-30.7	40.24	-	-	-	-	68.2	-27.96	98	322	H
2	3.124	38.48	PK-U	32.8	-28.8	42.48	-	-	-	-	68.2	-25.72	135	101	H
3	4.477	38.75	PK-U	34	-28.5	44.25	-	-	-	-	68.2	-23.95	325	168	H
4	6.33	36.33	PK-U	35.4	-25.9	45.83	-	-	-	-	68.2	-22.37	118	183	V
5	8.743	34.89	PK-U	35.9	-22.8	47.99	-	-	-	-	68.2	-20.21	48	100	V
6	10.156	33.37	PK-U	37.1	-20.6	49.87	-	-	-	-	68.2	-18.33	155	201	V

PK-U - U-NII: Maximum Peak

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

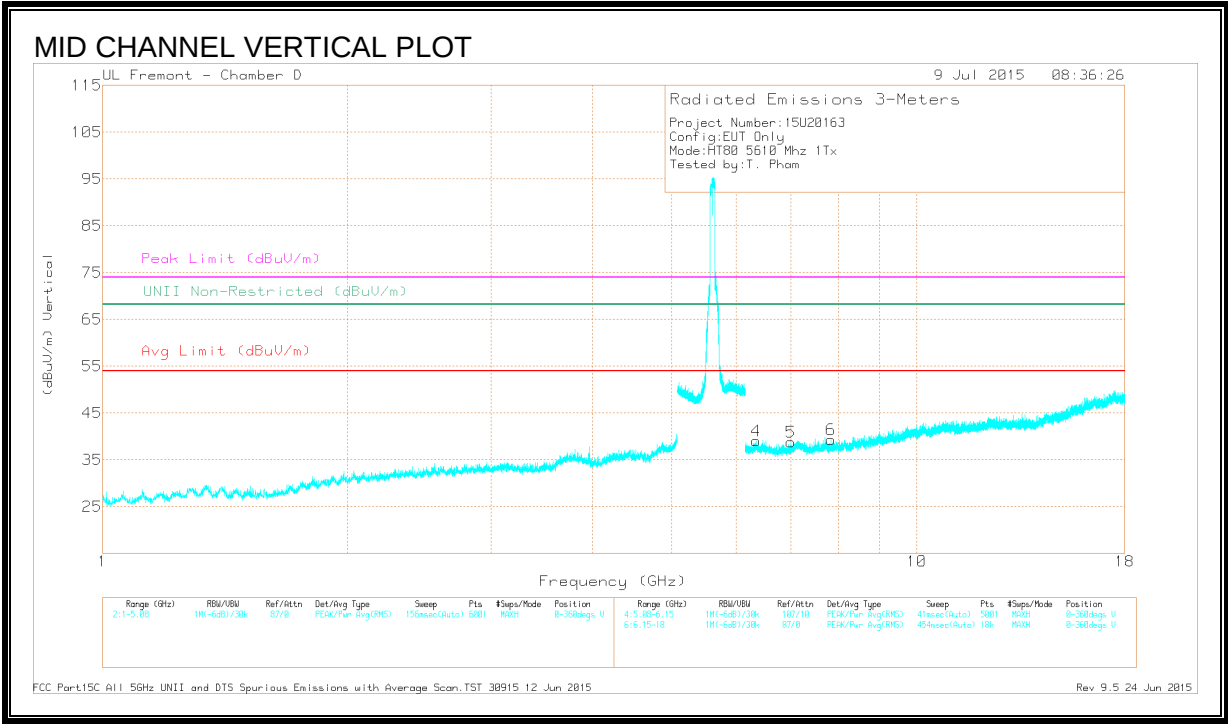
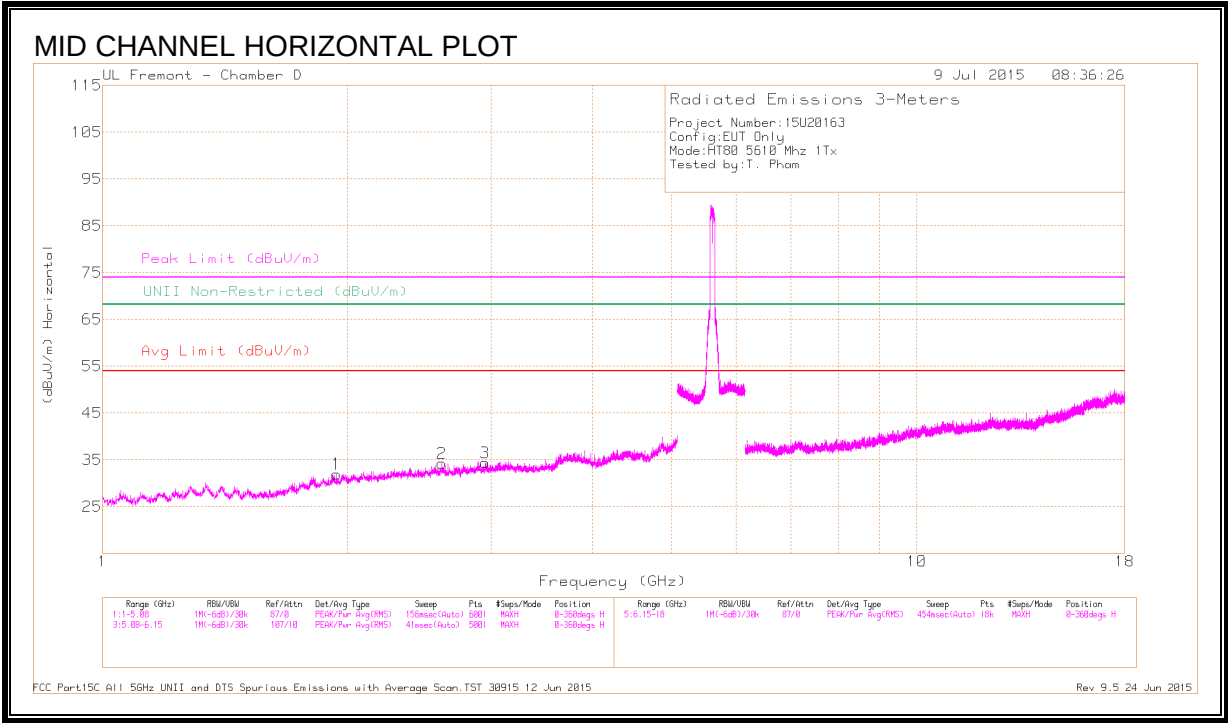


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.937	39.95	PK-U	30.9	-31.2	0	39.65	-	-	-	-	68.2	-28.55	15	133	H
2	2.607	39.55	PK-U	32.4	-29.9	0	42.05	-	-	-	-	68.2	-26.15	112	101	H
3	2.95	39.68	PK-U	32.8	-29.9	0	42.58	-	-	-	-	68.2	-25.62	155	109	H
4	6.35	36.86	PK-U	35.4	-25.9	0	46.36	-	-	-	-	68.2	-21.84	198	154	V
5	7.002	37.33	PK-U	35.5	-26.2	0	46.63	-	-	-	-	68.2	-21.57	265	100	V
6	7.845	36.03	PK-U	35.6	-24.8	0	46.83	-	-	-	-	68.2	-21.37	113	161	V

PK-U - U-NII: Maximum Peak

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

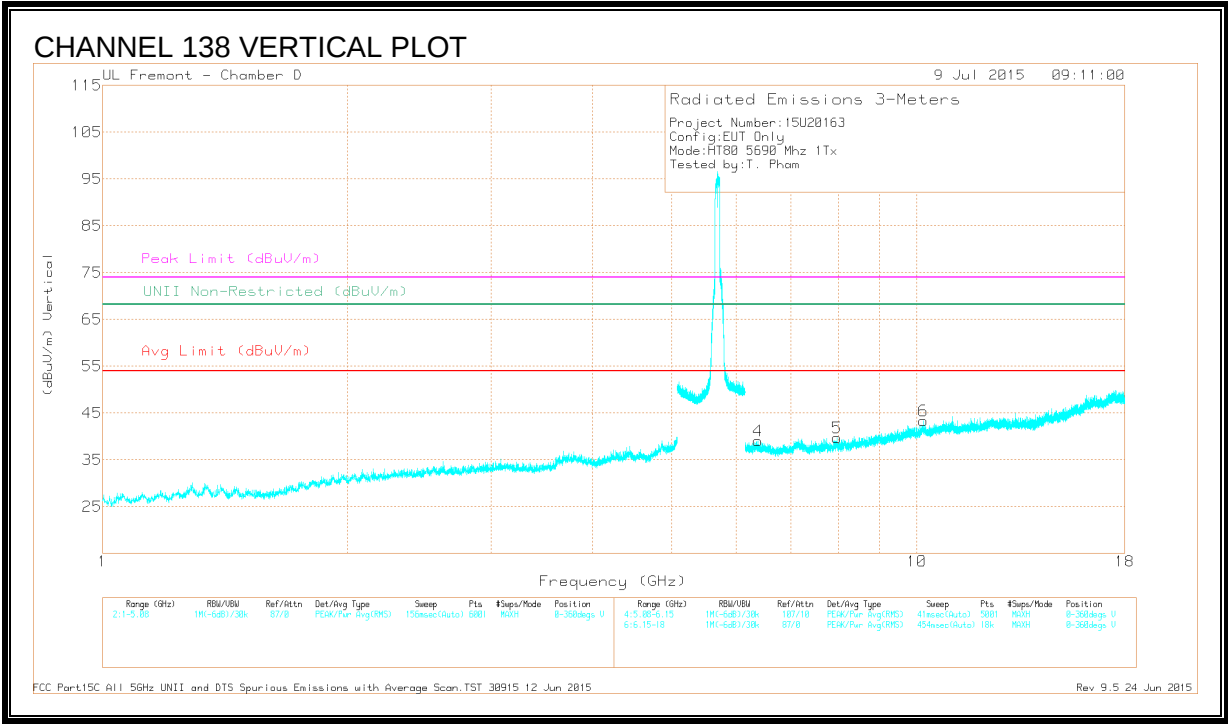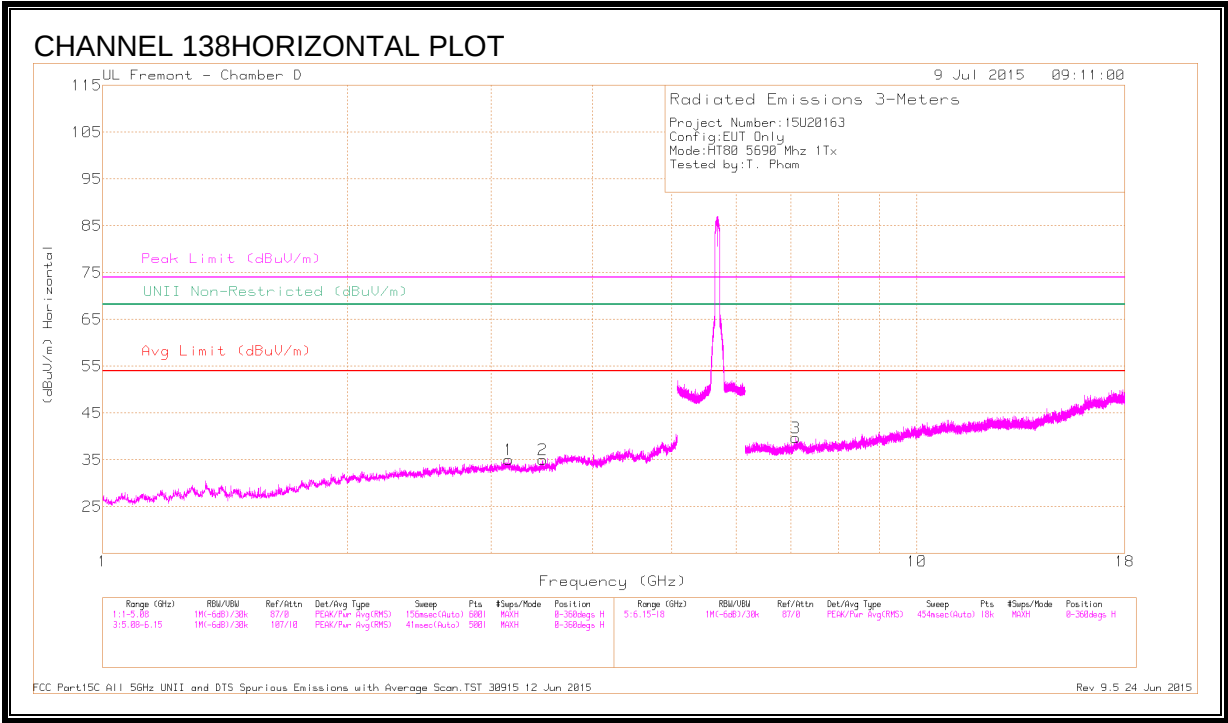


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.151	39.55	PK-U	32.7	-28.8	0	43.45	-	-	-	-	68.2	-24.75	14	237	H
2	3.471	39.11	PK-U	32.8	-28.8	0	43.11	-	-	-	-	68.2	-25.09	135	216	H
3	6.382	36.35	PK-U	35.4	-26	0	45.75	-	-	-	-	68.2	-22.45	191	133	V
4	7.103	36.03	PK-U	35.5	-25	0	46.53	-	-	-	-	68.2	-21.67	228	100	H
5	7.977	35.56	PK-U	35.7	-24	0	47.26	-	-	-	-	68.2	-20.94	335	102	V
6	10.192	33.67	PK-U	37.2	-21	0	49.87	-	-	-	-	68.2	-18.33	145	182	V

PK-U - U-NII: Maximum Peak

RESTRICTED BANDEDGE, CHAIN 1 (LOW CHANNEL)

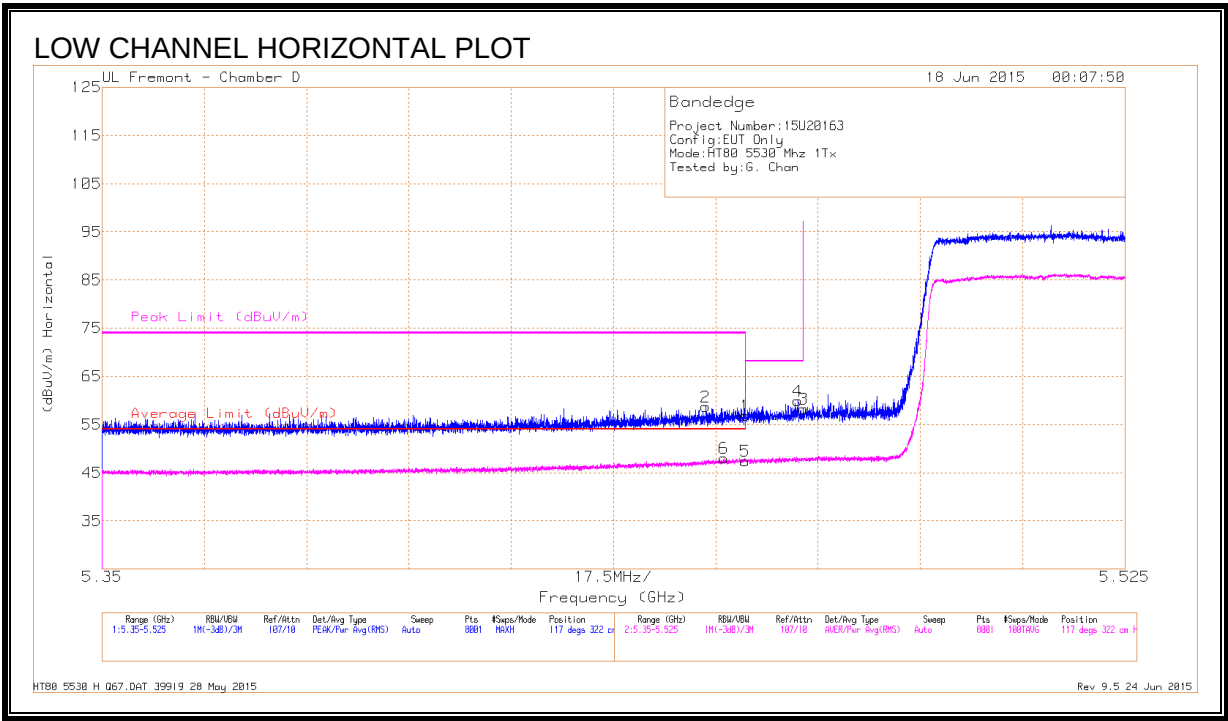


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.453	42.39	Pk	34.4	-18.1	0	58.69	-	-	74	-15.31	117	322	H
6	* 5.456	31.43	RMS	34.4	-18	.18	48.01	54	-5.99	-	-	117	322	H
1	* 5.46	40.47	Pk	34.4	-18	0	56.87	-	-	74	-17.13	117	322	H
5	* 5.46	30.85	RMS	34.4	-18	.18	47.43	54	-6.57	-	-	117	322	H
4	5.469	43.53	Pk	34.4	-18	0	59.93	-	-	68.2	-8.27	117	322	H
3	5.47	41.85	Pk	34.4	-18	0	58.25	-	-	68.2	-9.95	117	322	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

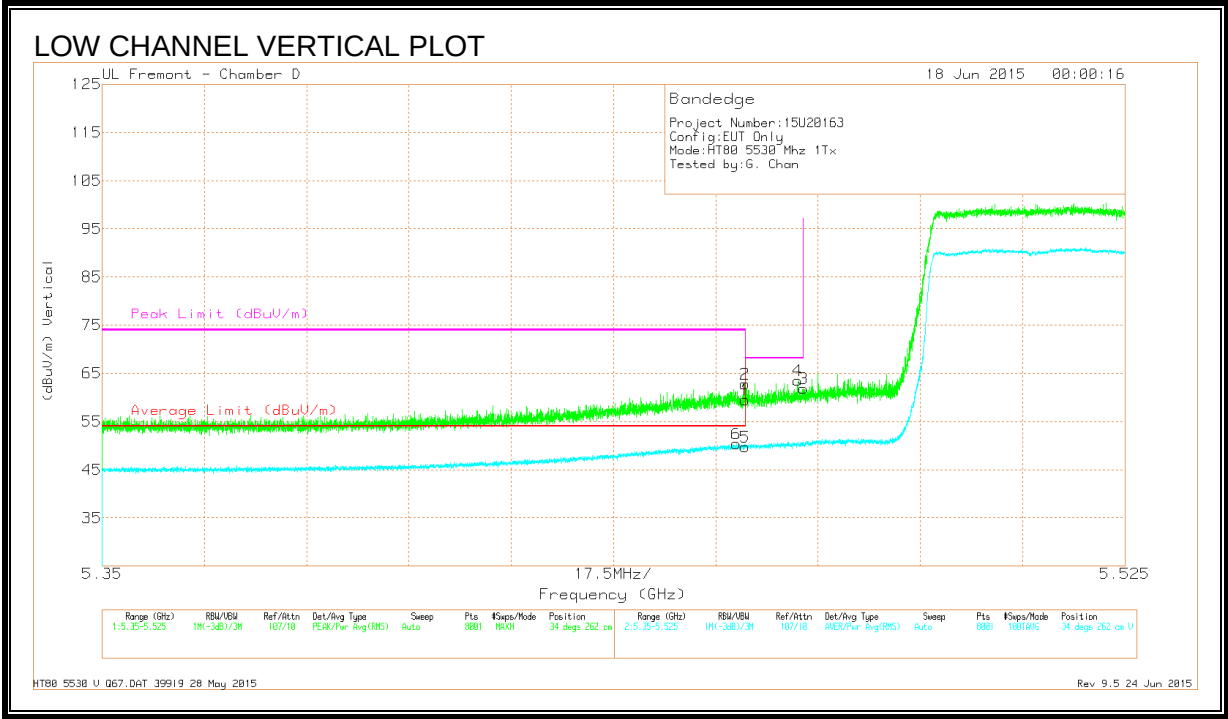

DATA



Marker	Frequency (GHz)	sMeter Reading (dBuV)	upDet	AF T344 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.459	33.99	RMS	34.4	-18	.18	50.57	54	-3.43	-	-	34	262	V
1	* 5.46	43.13	Pk	34.4	-18	0	59.53	-	-	74	-14.47	34	262	V
2	* 5.46	46.42	Pk	34.4	-18	0	62.82	-	-	74	-11.18	34	262	V
5	* 5.46	33.35	RMS	34.4	-18	.18	49.93	54	-4.07	-	-	34	262	V
4	5.469	47.11	Pk	34.4	-18	0	63.51	-	-	68.2	-4.69	34	262	V
3	5.47	45.47	Pk	34.4	-18	0	61.87	-	-	68.2	-6.33	34	262	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

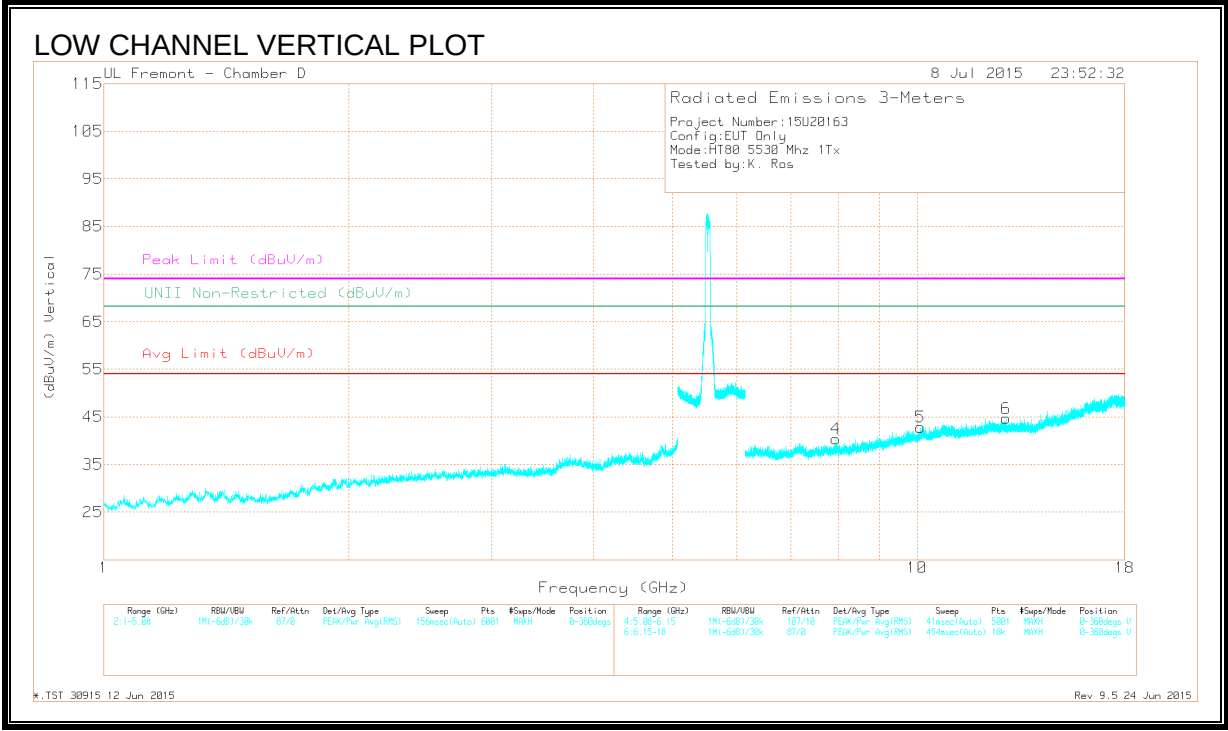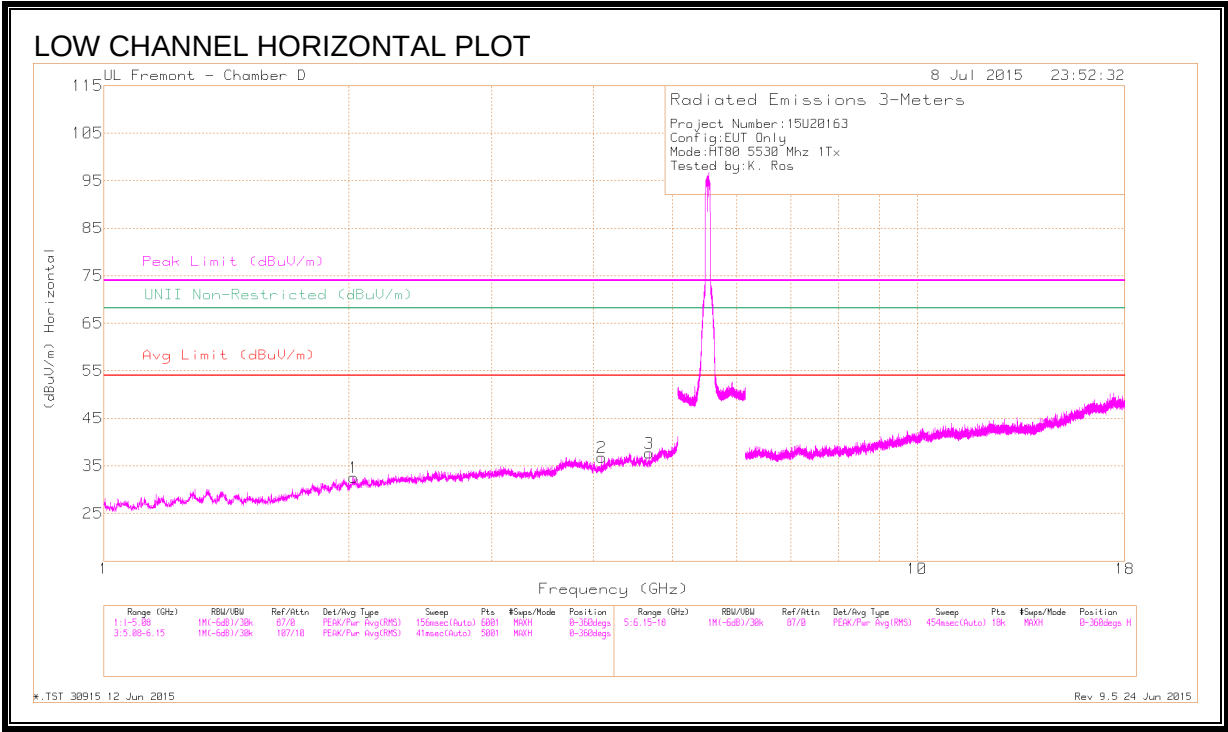

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.032	40.32	PK-U	31.2	-30.6	0	40.92	-	-	-	-	68.2	-27.28	52	123	H
2	* 4.1	38.69	PK-U	33.4	-28.8	0	43.29	-	-	74	-30.71	-	-	112	152	H
	* 4.098	26.91	ADR	33.4	-28.8	.18	31.69	54	-22.31	-	-	-	-	112	152	H
3	* 4.681	39.51	PK-U	34.2	-28.2	0	45.51	-	-	74	-28.49	-	-	80	189	H
	* 4.683	27.61	ADR	34.2	-28.3	.18	33.69	54	-20.31	-	-	-	-	80	189	H
4	7.95	36.41	PK-U	35.7	-24.2	0	47.91	-	-	-	-	68.2	-20.29	127	166	V
5	10.093	34.07	PK-U	37.1	-21.4	0	49.77	-	-	-	-	68.2	-18.43	106	188	V
6	12.864	34.64	PK-U	39.2	-22.5	0	51.34	-	-	-	-	68.2	-16.86	180	232	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

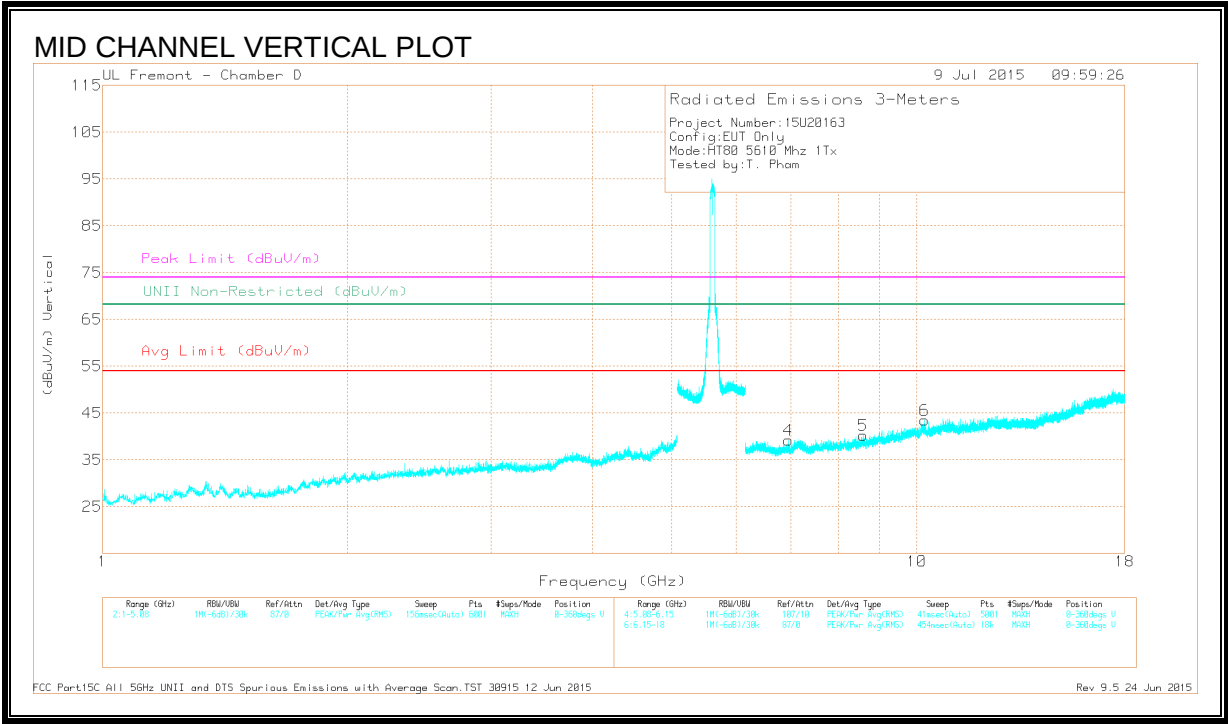
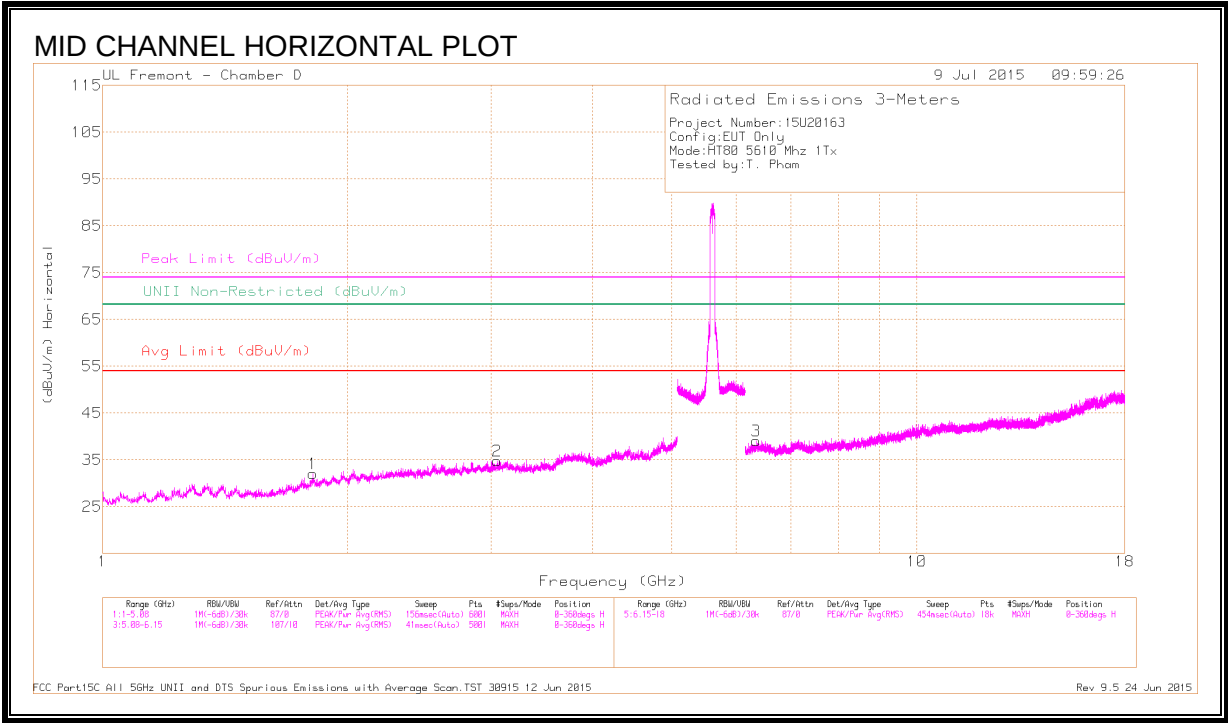


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.812	41.08	PK-U	30.2	-31.3	0	39.98	-	-	-	-	68.2	-28.22	215	101	H
2	3.052	39.7	PK-U	32.9	-29.8	0	42.8	-	-	-	-	68.2	-25.4	145	100	H
3	6.346	36.65	PK-U	35.4	-26	0	46.05	-	-	-	-	68.2	-22.15	98	112	H
4	6.952	35.98	PK-U	35.5	-25.9	0	45.58	-	-	-	-	68.2	-22.62	135	252	V
5	8.588	34.75	PK-U	35.8	-23.3	0	47.25	-	-	-	-	68.2	-20.95	255	182	V
6	10.215	34.21	PK-U	37.2	-21	0	50.41	-	-	-	-	68.2	-17.79	78	202	V

PK-U - U-NII: Maximum Peak

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

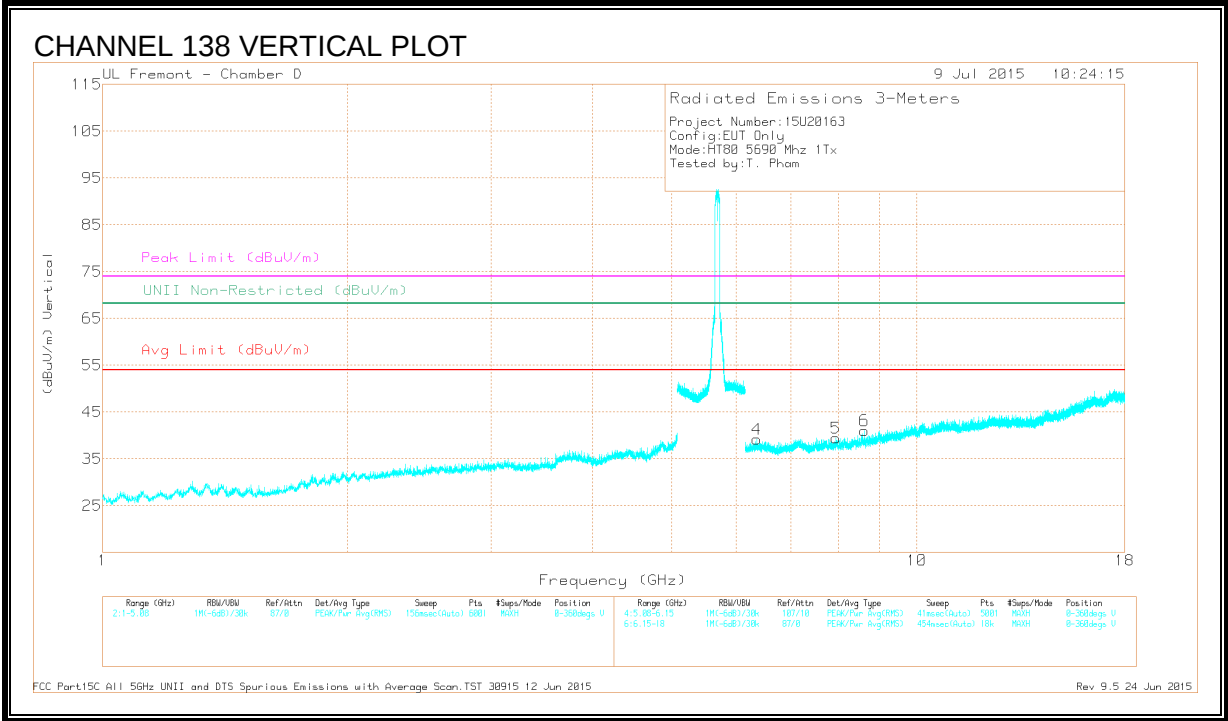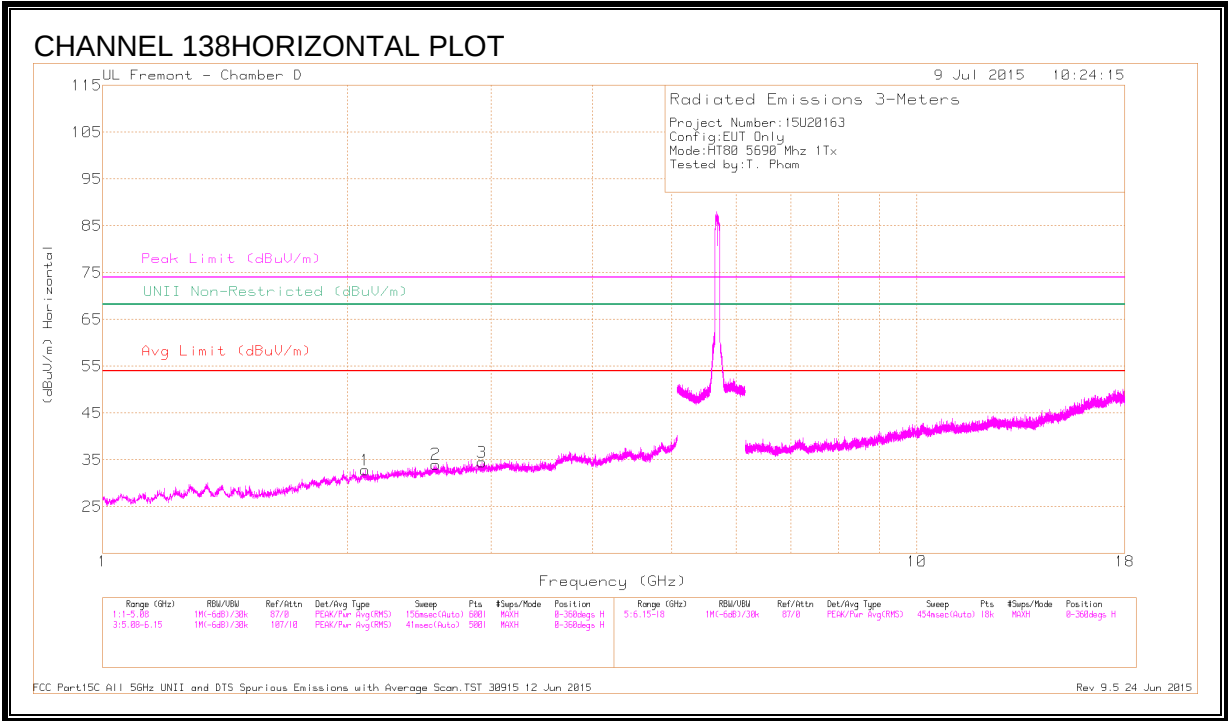


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.099	39.66	PK-U	31.3	-30.7	0	40.26	-	-	-	-	68.2	-27.94	187	201	H
2	2.565	39.86	PK-U	32.3	-29.7	0	42.46	-	-	-	-	68.2	-25.74	201	281	H
3	2.924	39.12	PK-U	32.7	-29.5	0	42.32	-	-	-	-	68.2	-25.88	85	165	H
4	6.363	36.54	PK-U	35.4	-26.1	0	45.84	-	-	-	-	68.2	-22.36	221	111	V
5	7.953	35.57	PK-U	35.7	-24.1	0	47.17	-	-	-	-	68.2	-21.03	105	221	V
6	8.617	34.58	PK-U	35.8	-22.7	0	47.68	-	-	-	-	68.2	-20.52	165	121	V

PK-U - U-NII: Maximum Peak

11.19. 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

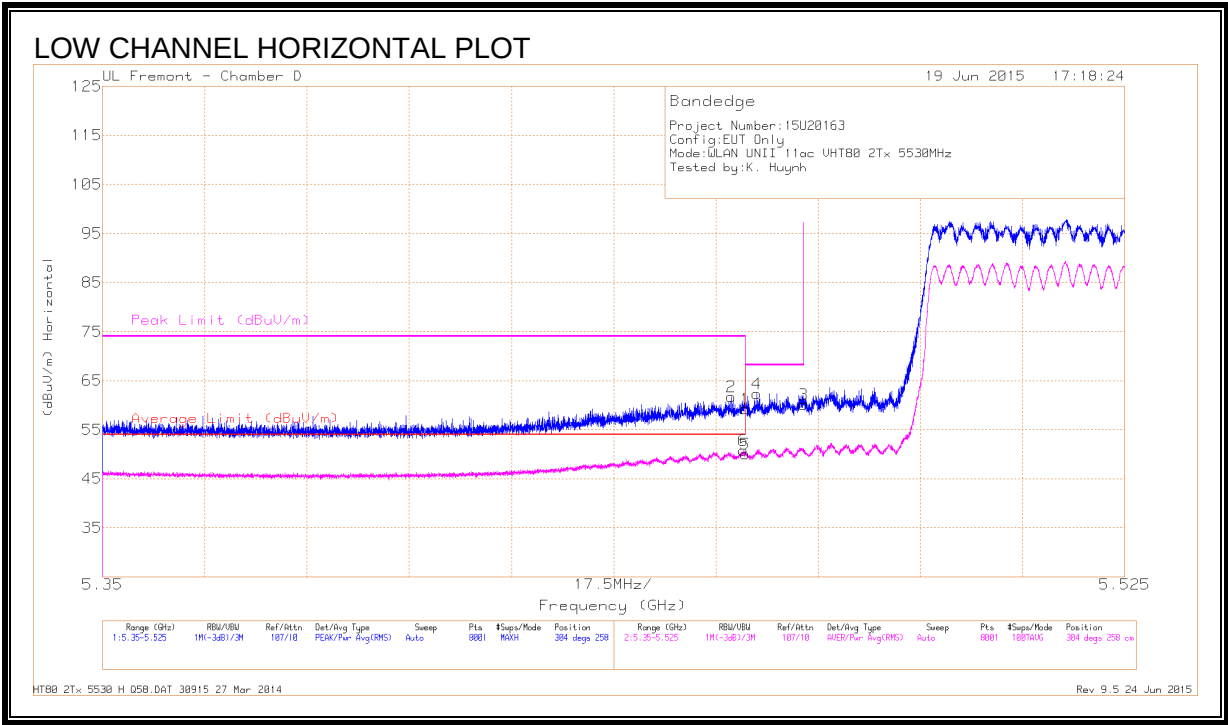


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.94	Pk	34.6	-21.3	0	59.24	-	-	74	-14.76	304	258	H
2	* 5.458	48.46	Pk	34.6	-21.4	0	61.66	-	-	74	-12.34	304	258	H
3	5.47	46.8	Pk	34.6	-21.3	0	60.1	-	-	68.2	-8.1	304	258	H
4	5.462	49.08	Pk	34.6	-21.3	0	62.38	-	-	68.2	-5.82	304	258	H
5	* 5.46	36.53	RMS	34.6	-21.3	.21	50.04	54	-3.96	-	-	304	258	H
6	* 5.46	37.22	RMS	34.6	-18	.21	50.67	54	-3.33	-	-	304	258	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

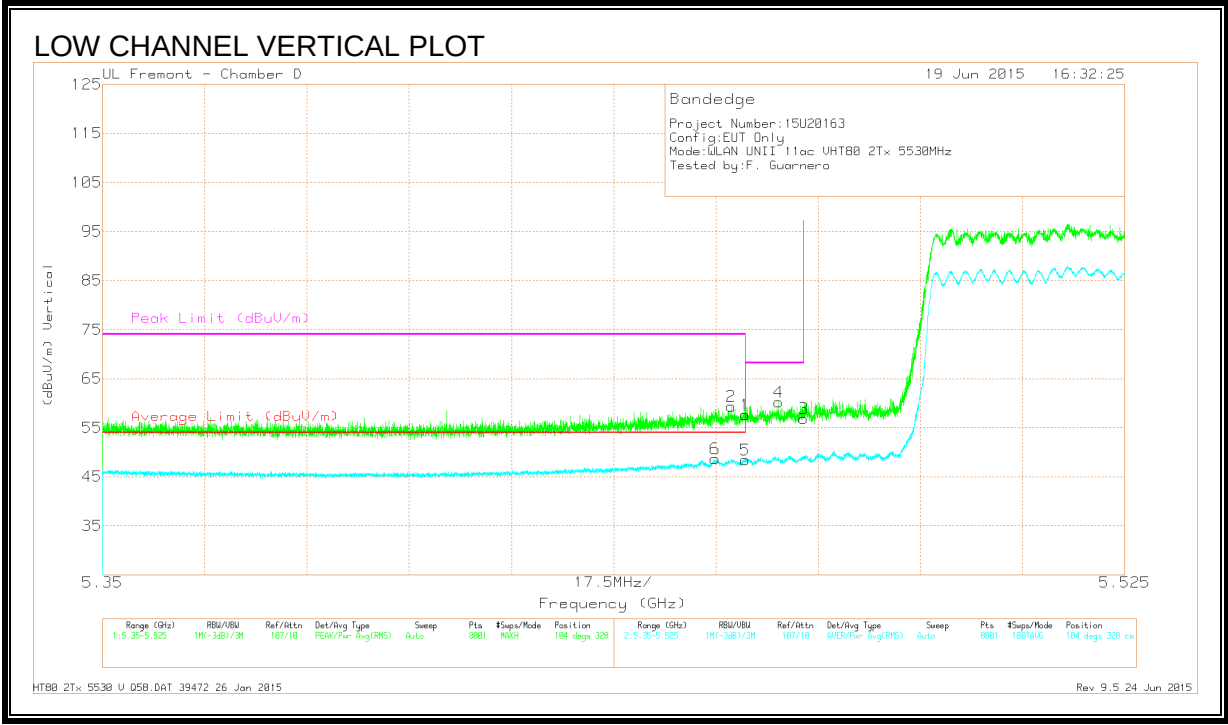

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	44.32	Pk	34.6	-21.3	0	57.62	-	-	74	-16.38	104	328	V
2	* 5.458	46.19	Pk	34.6	-21.4	0	59.39	-	-	74	-14.61	104	328	V
3	5.47	43.57	Pk	34.6	-21.3	0	56.87	-	-	68.2	-11.33	104	328	V
4	5.466	46.92	Pk	34.6	-21.3	0	60.22	-	-	68.2	-7.98	104	328	V
5	* 5.46	34.89	RMS	34.6	-21.3	.21	48.40	54	-5.60	-	-	104	328	V
6	* 5.455	35.28	RMS	34.6	-21.4	.21	48.69	54	-5.31	-	-	104	328	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

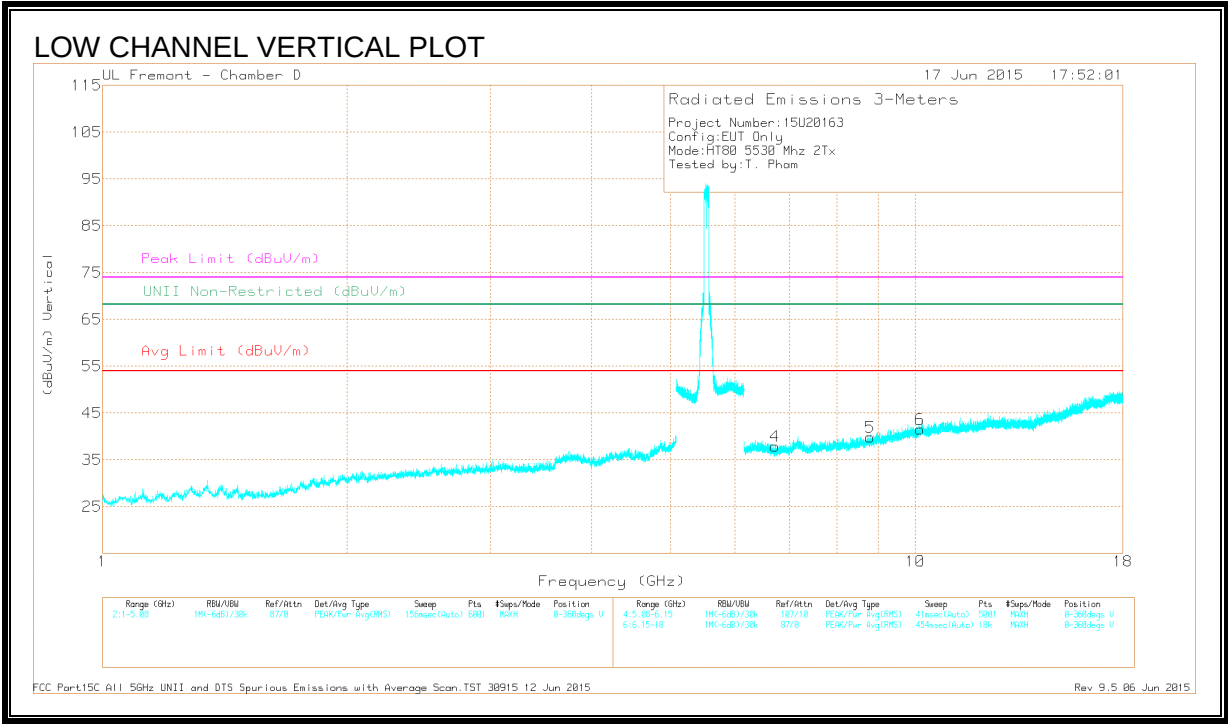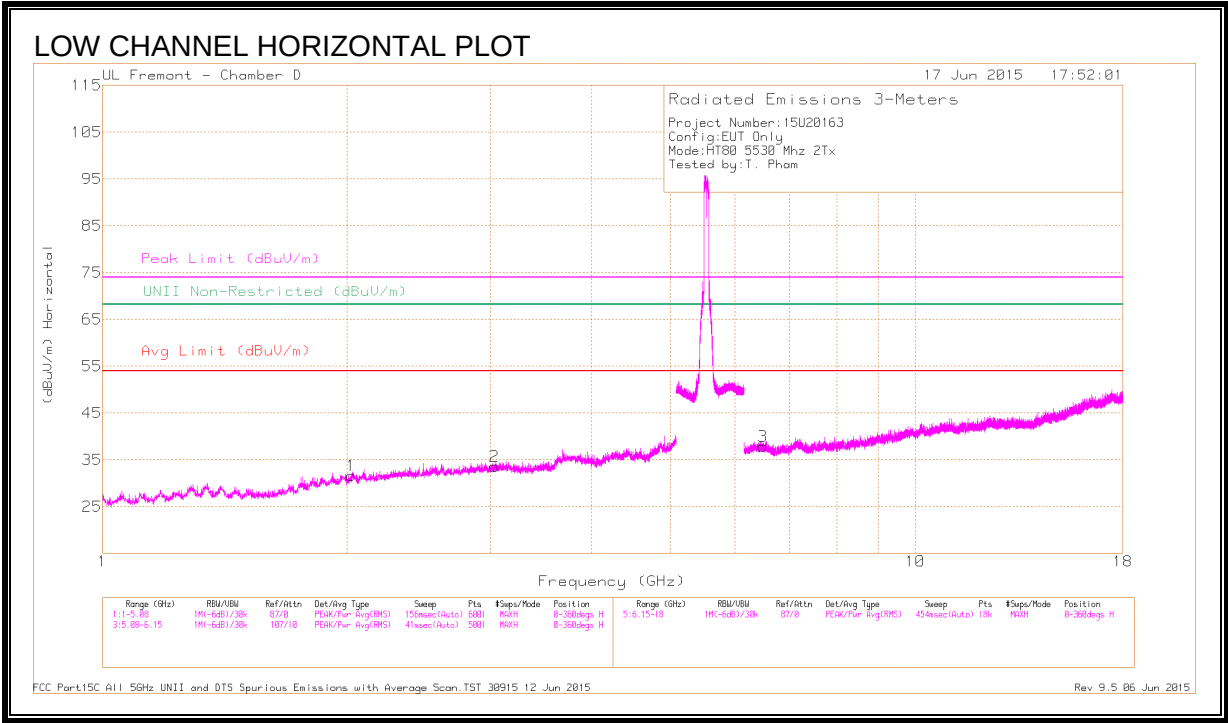

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.022	40.11	PK-U	31.1	-30.6	0	40.61	-	-	-	-	68.2	-27.59	354	284	H
2	3.037	39.71	PK-U	32.9	-30	0	42.61	-	-	-	-	68.2	-25.59	145	189	H
3	6.494	36.35	PK-U	35.5	-25.7	0	46.15	-	-	-	-	68.2	-22.05	55	201	H
4	6.717	36.94	PK-U	35.5	-26.6	0	45.84	-	-	-	-	68.2	-22.36	183	111	V
5	8.801	34.83	PK-U	35.9	-23	0	47.73	-	-	-	-	68.2	-20.47	312	100	V
6	10.133	33.71	PK-U	37.1	-21.2	0	49.61	-	-	-	-	68.2	-18.59	284	102	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

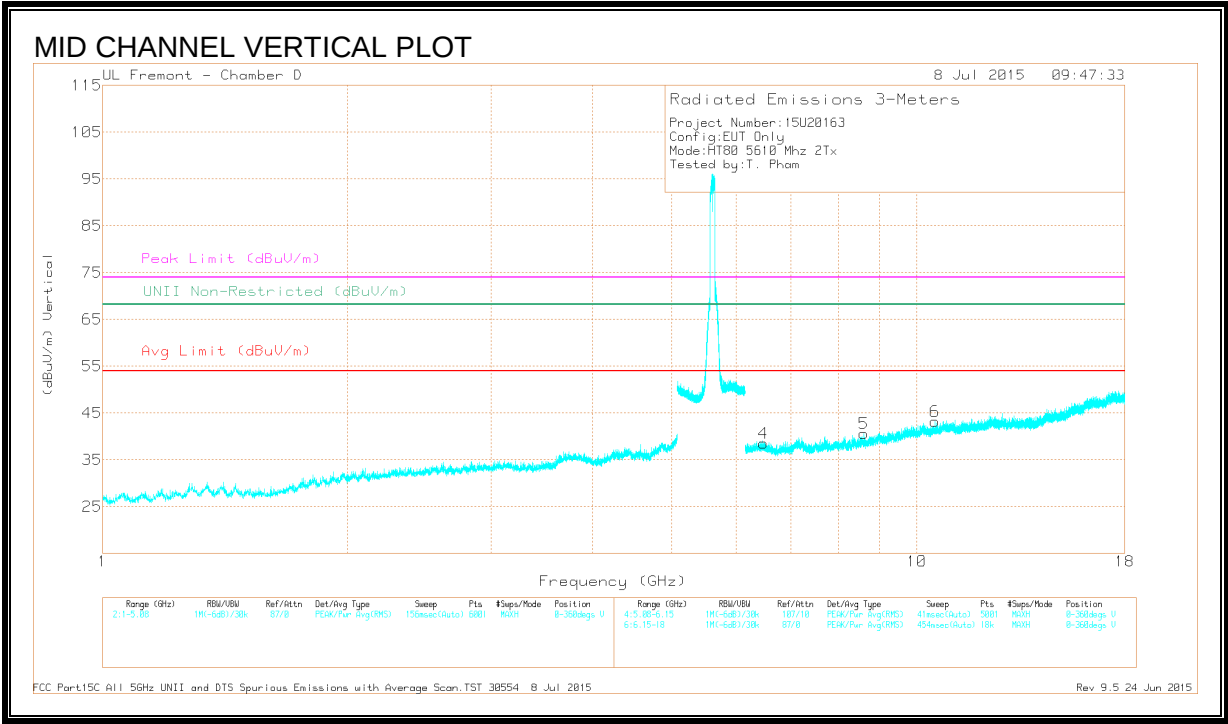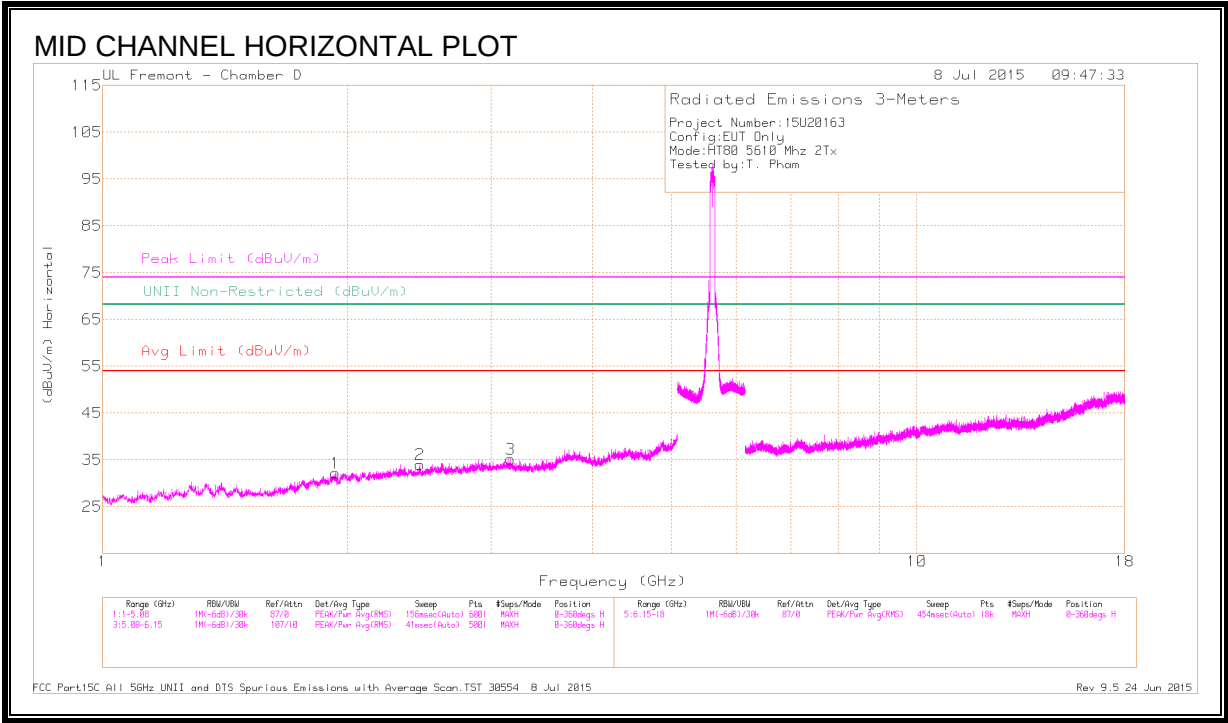

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.929	40.35	PK-U	30.9	-31.1	0	40.15	-	-	-	-	68.2	-28.05	36	100	H
2	2.455	40.32	PK-U	32.1	-30.8	0	41.62	-	-	-	-	68.2	-26.58	322	131	H
3	3.167	38.93	PK-U	32.7	-29	0	42.63	-	-	-	-	68.2	-25.57	198	171	H
4	6.484	35.93	PK-U	35.5	-25.6	0	45.83	-	-	-	-	68.2	-22.37	122	249	V
5	8.612	34.63	PK-U	35.8	-22.7	0	47.73	-	-	-	-	68.2	-20.47	254	122	V
6	10.523	33.82	PK-U	37.6	-21.5	0	49.92	-	-	-	-	68.2	-18.28	49	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

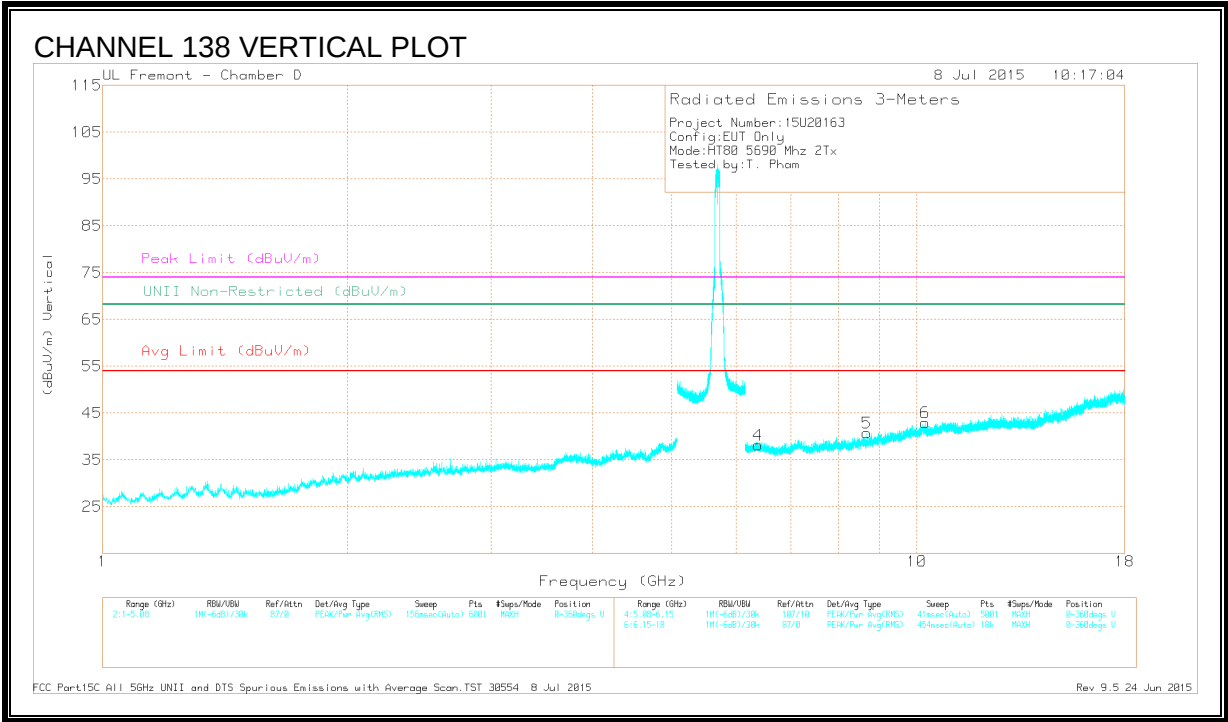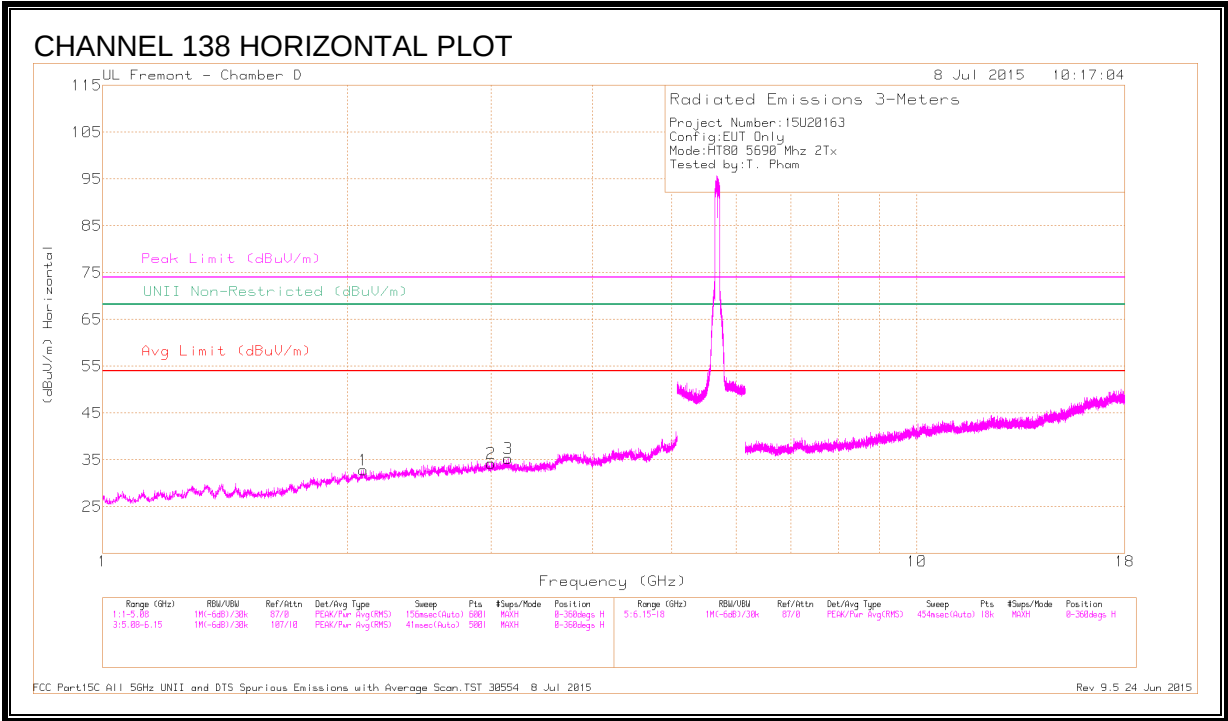

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.09	40.69	PK-U	31.3	-30.6	0	41.39	-	-	-	-	68.2	-26.81	345	184	H
2	2.998	40.34	PK-U	32.9	-30.2	0	43.04	-	-	-	-	68.2	-25.16	185	105	H
3	3.151	39.2	PK-U	32.7	-28.8	0	43.1	-	-	-	-	68.2	-25.1	224	212	H
4	6.38	36.57	PK-U	35.4	-26	0	45.97	-	-	-	-	68.2	-22.23	65	101	V
5	8.685	34.92	PK-U	35.9	-23.3	0	47.52	-	-	-	-	68.2	-20.68	184	148	V
6	10.233	34.16	PK-U	37.2	-20.9	0	50.46	-	-	-	-	68.2	-17.74	225	151	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.20. 802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND


RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

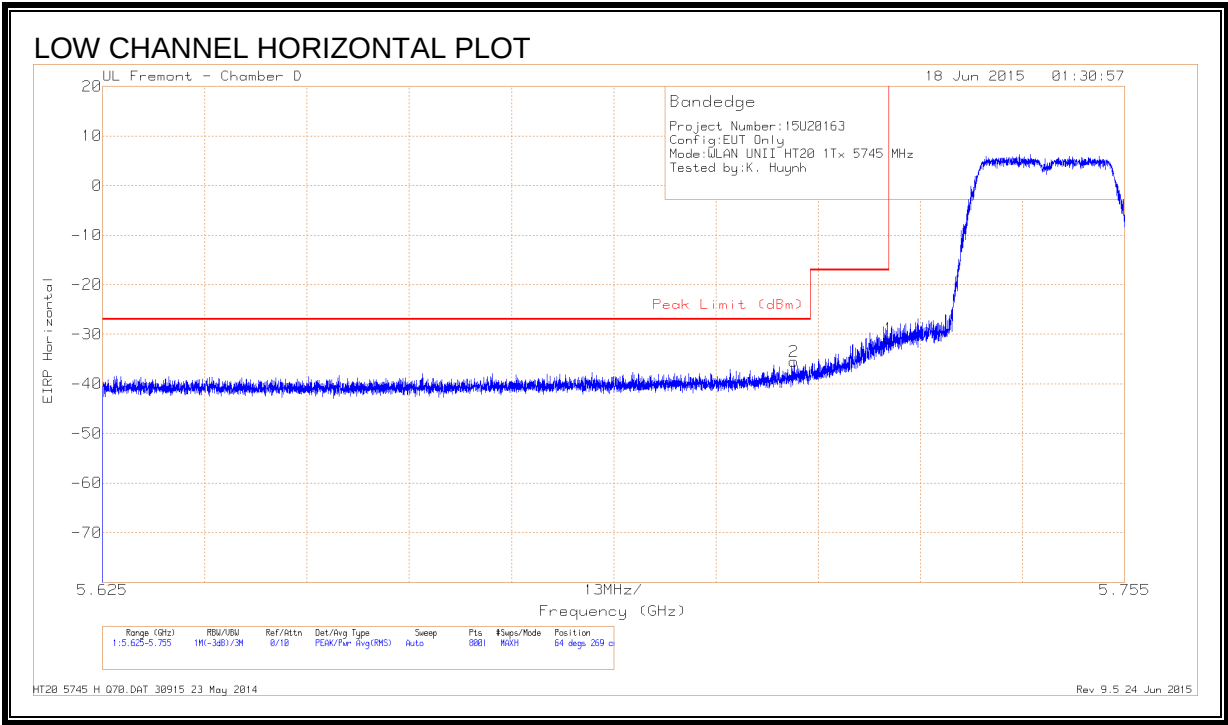

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-56.26	Pk	34.7	-21	11.8	-30.76	-17	-13.76	64	269	H
2	5.713	-60.99	Pk	34.7	-21	11.8	-35.49	-27	-8.49	64	269	H

Pk - Peak detector

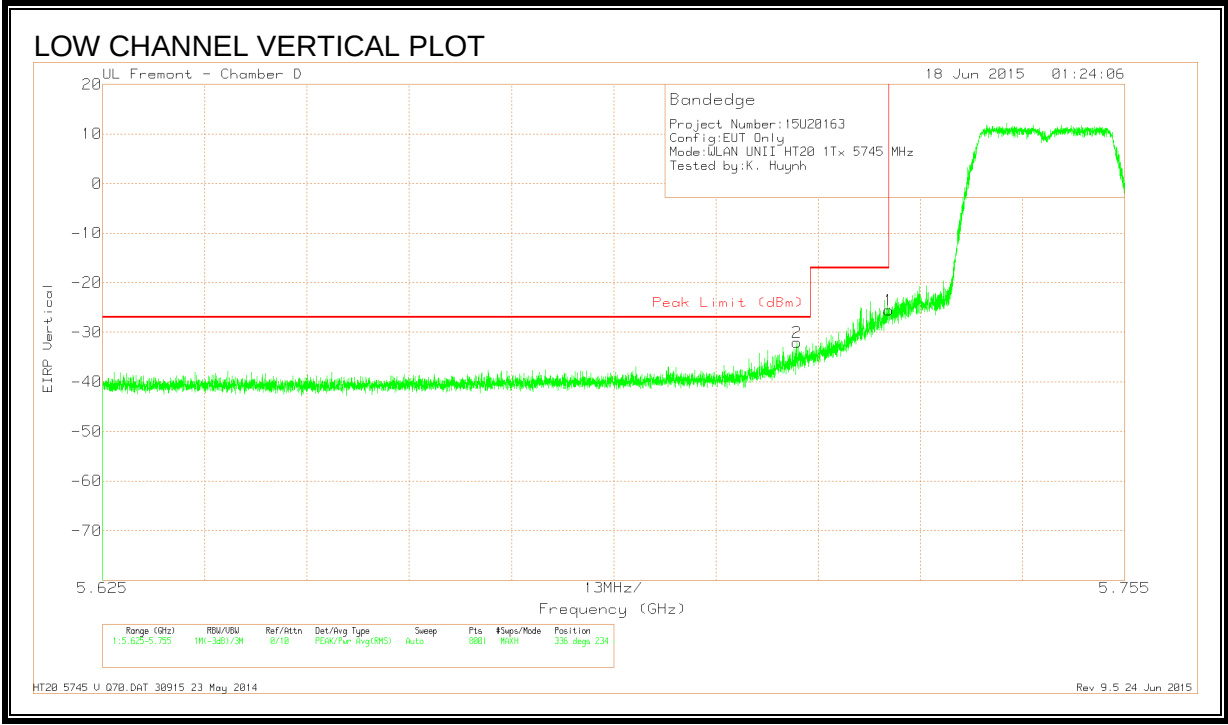


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-51.06	Pk	34.7	-21	11.8	-25.56	-17	-8.56	336	234	V
2	5.713	-57.53	Pk	34.7	-21	11.8	-32.03	-27	-5.03	336	234	V

Pk - Peak detector


RESTRICTED BANDEDGE (HIGH CHANNEL)

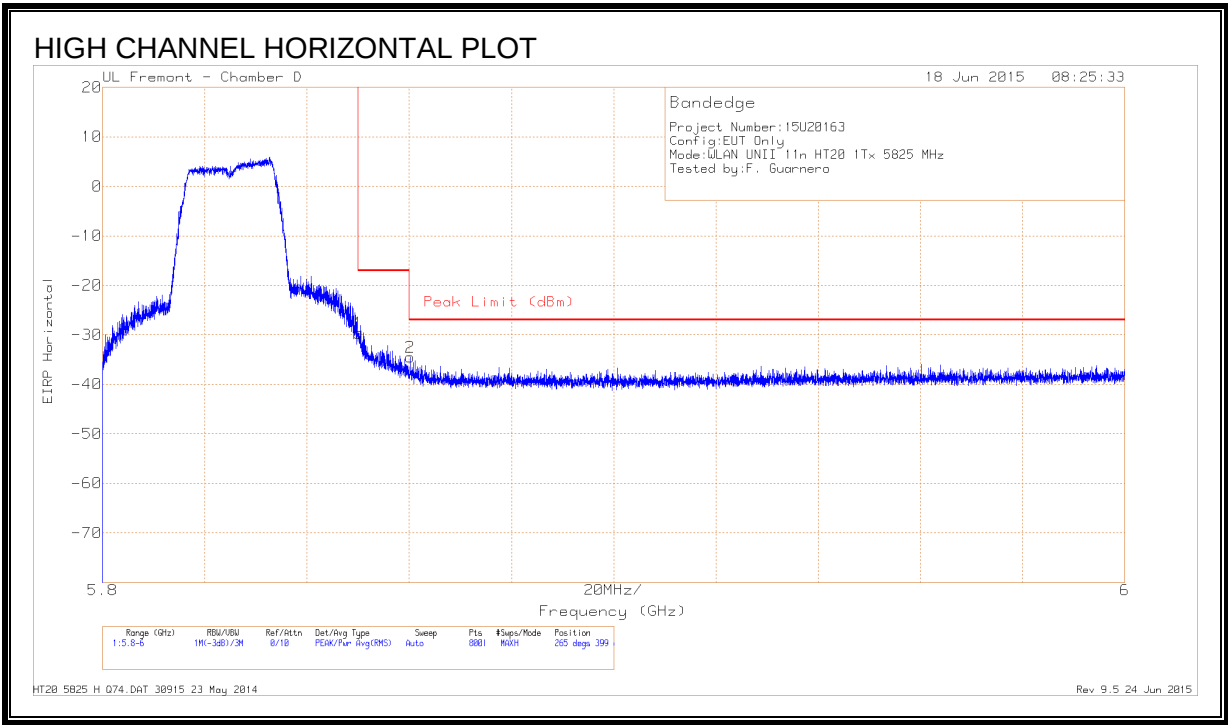

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-55.14	Pk	34.9	-21.2	11.8	-29.64	-17	-12.64	265	399	H
2	5.86	-60.05	Pk	34.9	-21.2	11.8	-34.55	-27	-7.55	265	399	H

Pk - Peak detector


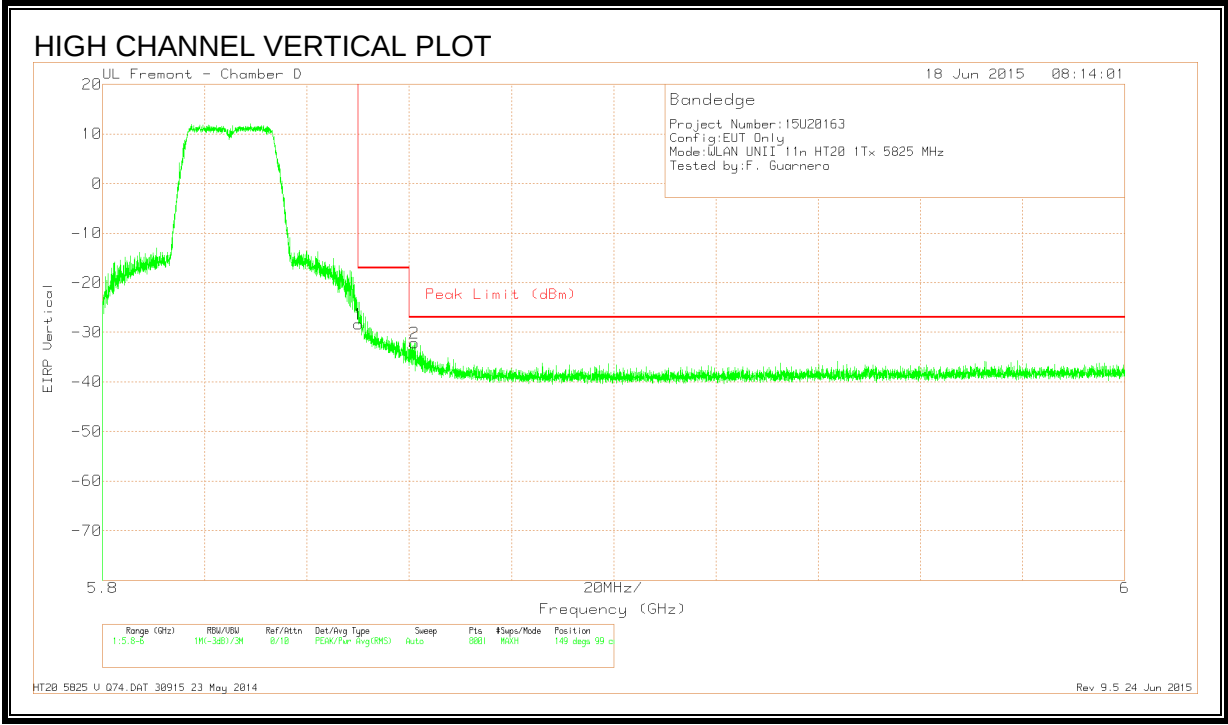


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-53.81	Pk	34.9	-21.2	11.8	-28.31	-17	-11.31	149	99	V
2	5.861	-57.52	Pk	34.9	-21.3	11.8	-32.12	-27	-5.12	149	99	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

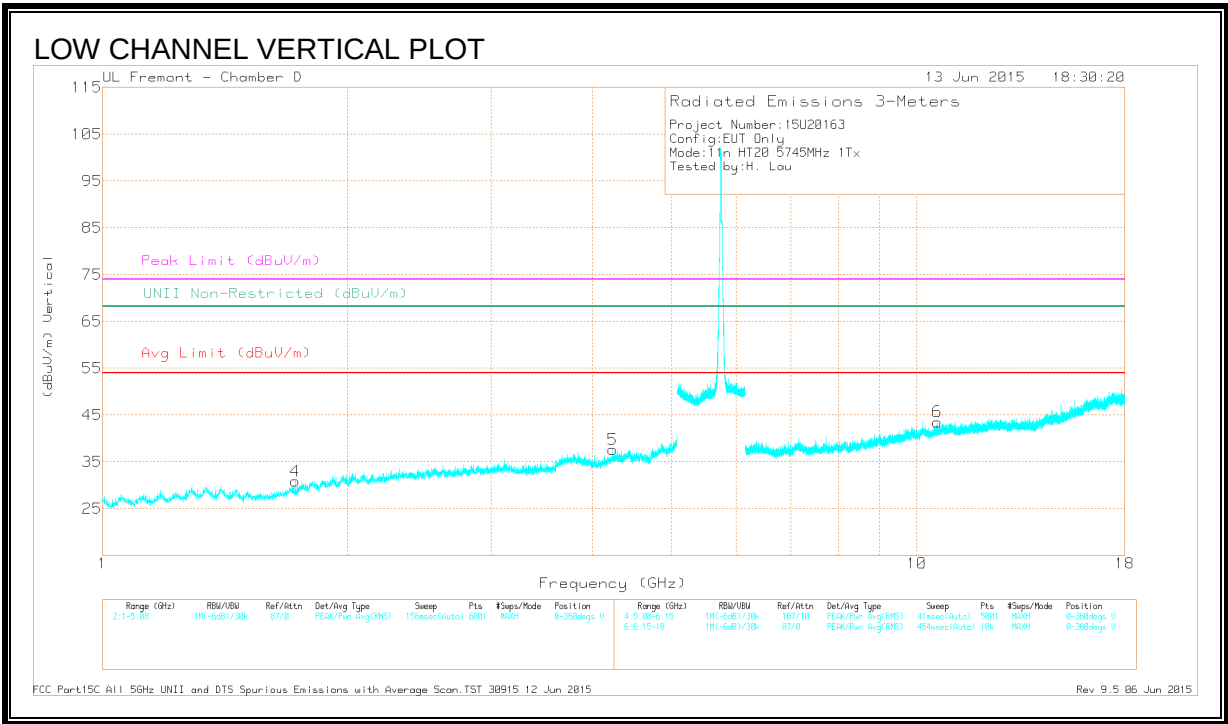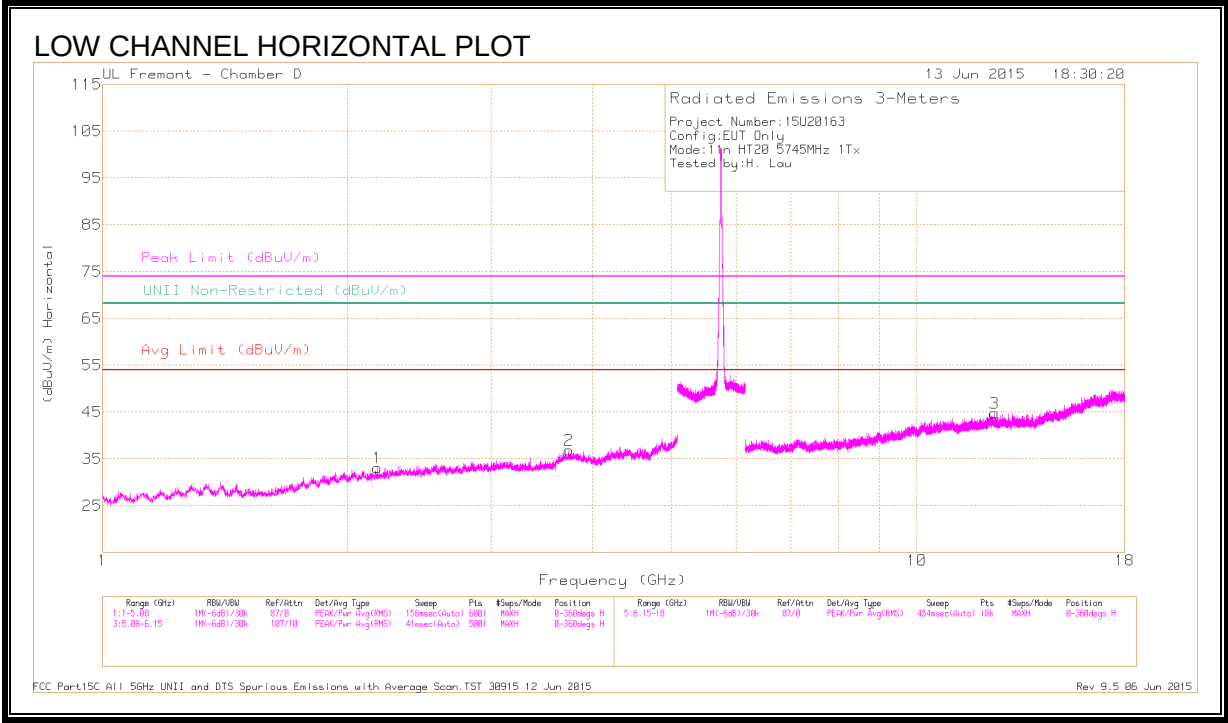

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.175	40.12	PK3	31.5	-31	40.62	-	-	-	-	68.2	-27.58	270	120	H
2	* 3.74	38.98	PK3	33.3	-29.1	43.18	-	-	74	-30.82	-	-	231	152	H
	* 3.74	27.59	ADR	33.3	-29.1	31.79	54	-22.21	-	-	-	-	231	152	H
3	* 12.463	34.77	PK3	39.1	-22	51.87	-	-	74	-22.13	-	-	152	159	H
	* 12.464	23.58	ADR	39.1	-22	40.68	54	-13.32	-	-	-	-	152	159	H
4	1.725	39.99	PK3	29.1	-31.2	37.89	-	-	-	-	68.2	-30.31	169	101	V
5	* 4.231	37.51	PK3	33.5	-27.6	43.41	-	-	74	-30.59	-	-	111	135	V
	* 4.229	26.57	ADR	33.5	-27.7	32.37	54	-21.63	-	-	-	-	111	135	V
6	* 10.602	34.73	PK3	37.7	-21.5	50.93	-	-	74	-23.07	-	-	105	183	V
	* 10.601	23.1	ADR	37.7	-21.5	39.3	54	-14.7	-	-	-	-	105	183	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

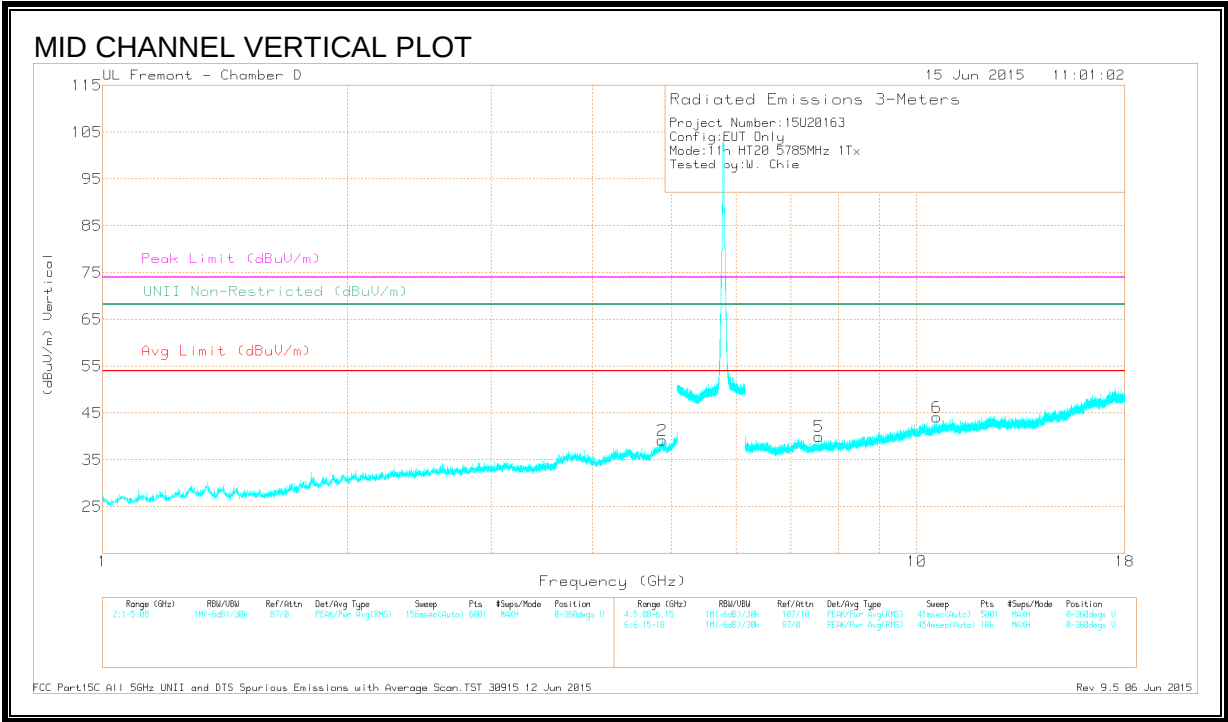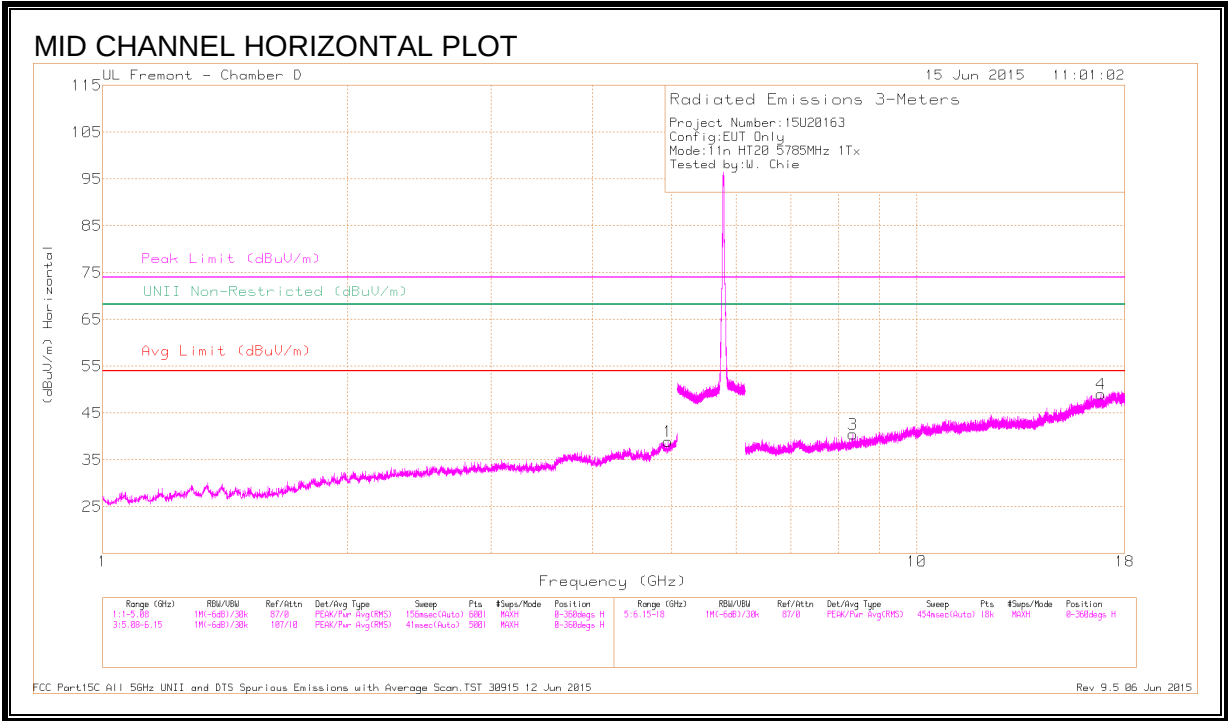

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.946	38.33	PK3	34.2	-26.9	45.63	-	-	74	-28.37	-	-	195	198	H
	* 4.946	26.14	ADR	34.2	-26.9	33.44	54	-20.56	-	-	-	-	195	198	H
2	* 4.867	37.5	PK3	34.1	-25.2	46.4	-	-	74	-27.6	-	-	68	355	V
	* 4.866	25.21	ADR	34.1	-25.3	34.01	54	-19.99	-	-	-	-	68	355	V
3	* 8.338	36.17	PK3	35.7	-24.1	47.77	-	-	74	-26.23	-	-	107	138	H
	* 8.338	23.68	ADR	35.7	-24.1	35.28	54	-18.72	-	-	-	-	107	138	H
4	16.834	33.62	PK3	41.5	-19.2	55.92	-	-	-	-	68.2	-12.28	174	215	H
5	* 7.582	36.67	PK3	35.6	-25.5	46.77	-	-	74	-27.23	-	-	40	266	V
	* 7.584	24.59	ADR	35.6	-25.5	34.69	54	-19.31	-	-	-	-	40	266	V
6	10.571	34.07	PK3	37.7	-21.5	50.27	-	-	-	-	68.2	-17.93	146	170	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

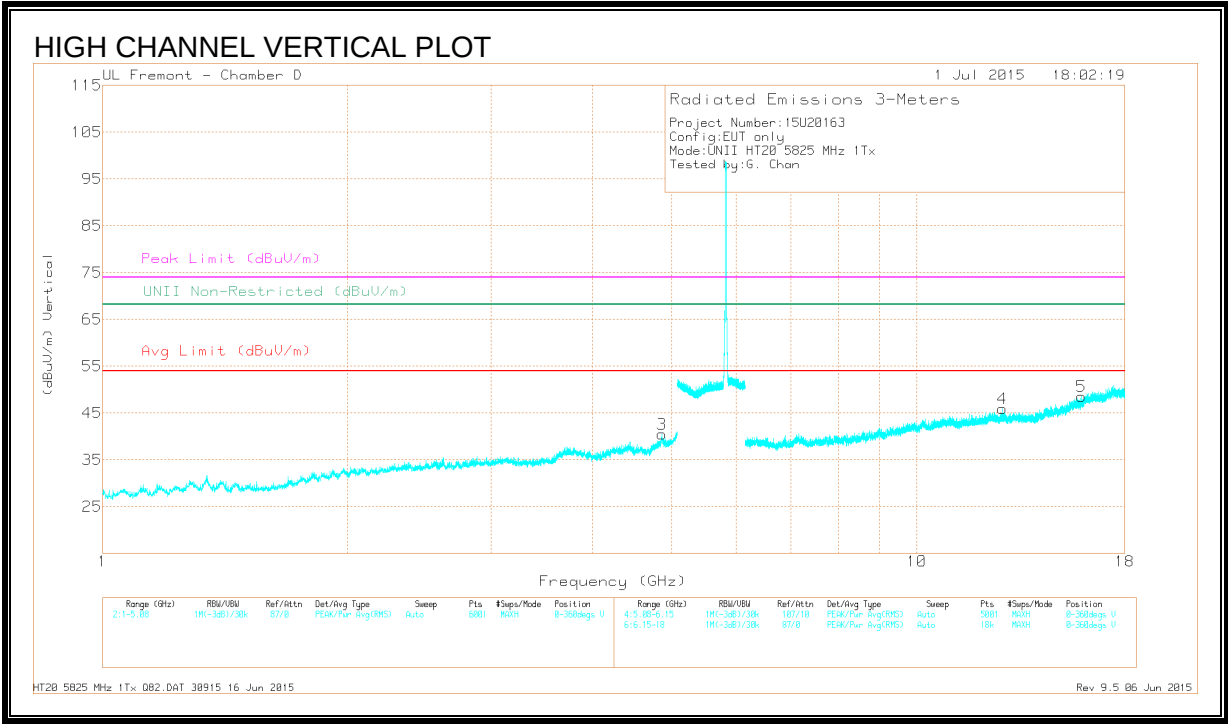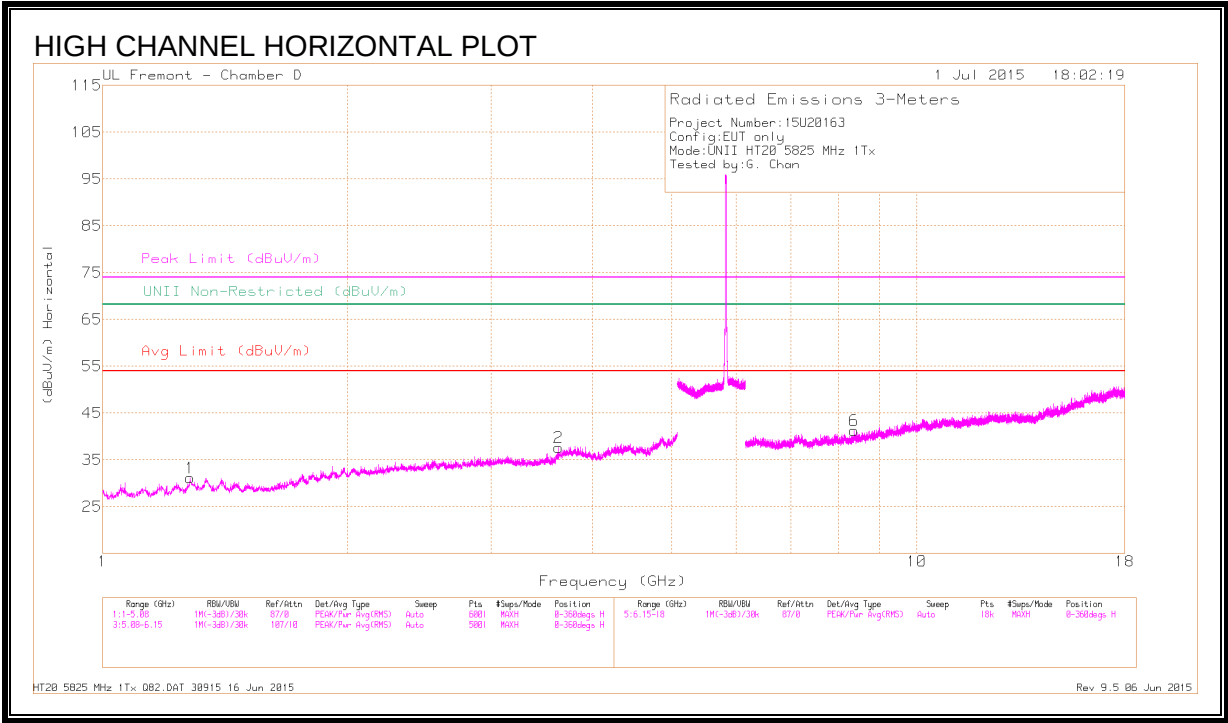

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.28	41.15	PK3	28.8	-31.9	38.05	-	-	74	-35.95	-	-	201	117	H
	* 1.28	29.19	ADR	28.8	-31.9	26.09	54	-27.91	-	-	-	-	201	117	H
2	* 4.859	37.46	PK3	34.1	-25.5	46.06	-	-	74	-27.94	-	-	165	140	V
	* 4.86	25.87	ADR	34.1	-25.5	34.47	54	-19.53	-	-	-	-	165	140	V
3	* 8.378	35.34	PK3	35.7	-23.6	47.44	-	-	74	-26.56	-	-	194	185	H
	* 8.379	24.26	ADR	35.7	-23.6	36.36	54	-17.64	-	-	-	-	194	185	H
4	12.737	34.42	PK3	39.2	-22.2	51.42	-	-	-	-	68.2	-16.78	175	322	V
	12.738	23.71	ADR	39.2	-22.2	40.71	-	-	-	-	-	-	175	322	V
5	* 1.28	41.7	PK3	28.8	-31.9	38.6	-	-	74	-35.4	-	-	73	284	H
	* 1.28	29.18	ADR	28.8	-31.9	26.08	54	-27.92	-	-	-	-	73	284	H
6	* 15.915	35.04	PK3	41	-20.8	55.24	-	-	74	-18.76	-	-	19	138	V
	* 15.914	22.98	ADR	41	-20.8	43.18	54	-10.82	-	-	-	-	19	138	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


RESTRICTED BANDEGE, CHAIN 1 (LOW CHANNEL)

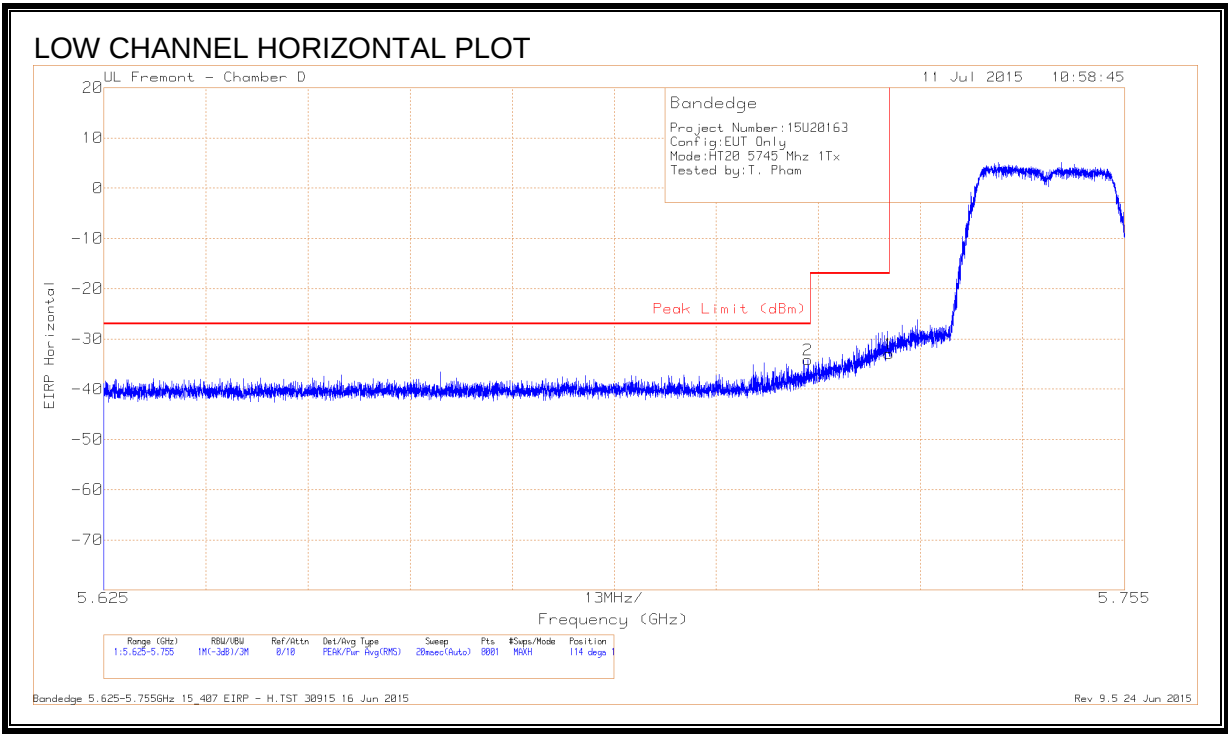

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-61.77	Pk	34.6	-17.6	11.8	-32.97	-17	-15.97	114	164	H
2	5.715	-63.07	Pk	34.6	-17.5	11.8	-34.17	-27	-7.17	114	164	H

Pk - Peak detector

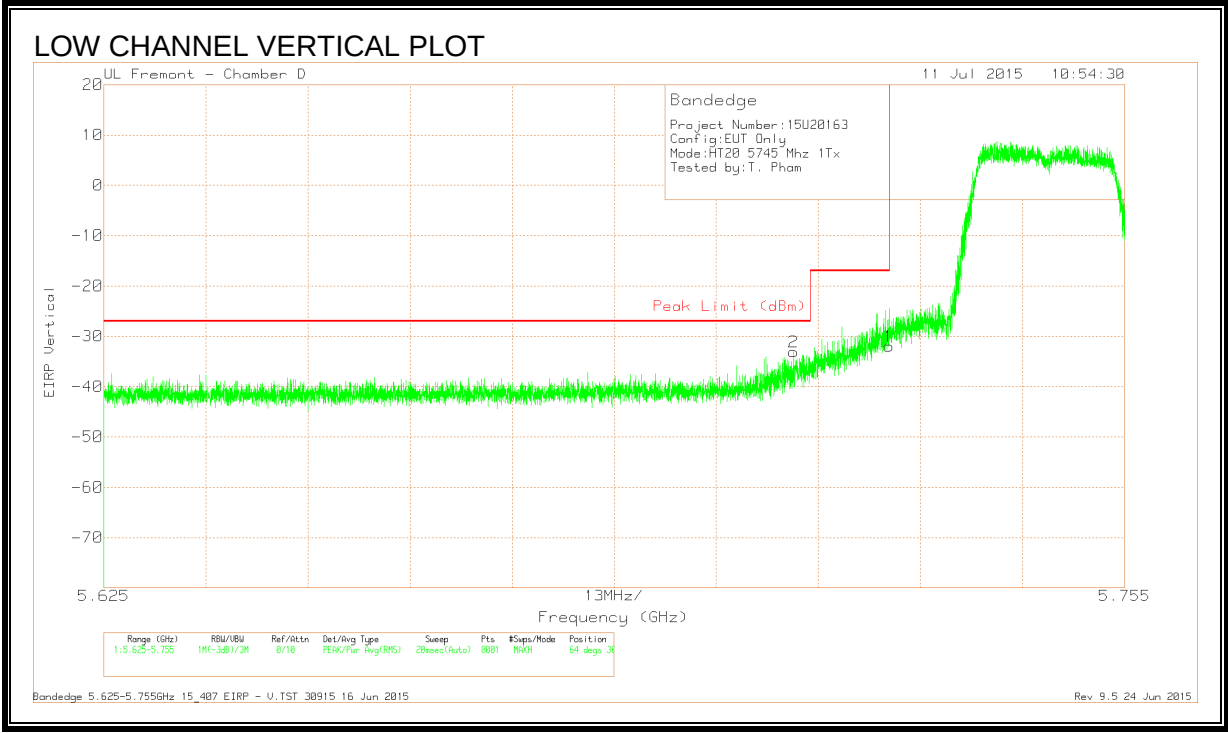


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-60.81	Pk	34.6	-17.6	11.8	-32.01	-17	-15.01	64	309	V
2	5.713	-61.98	Pk	34.6	-17.5	11.8	-33.08	-27	-6.08	64	309	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 1 (HIGH CHANNEL)

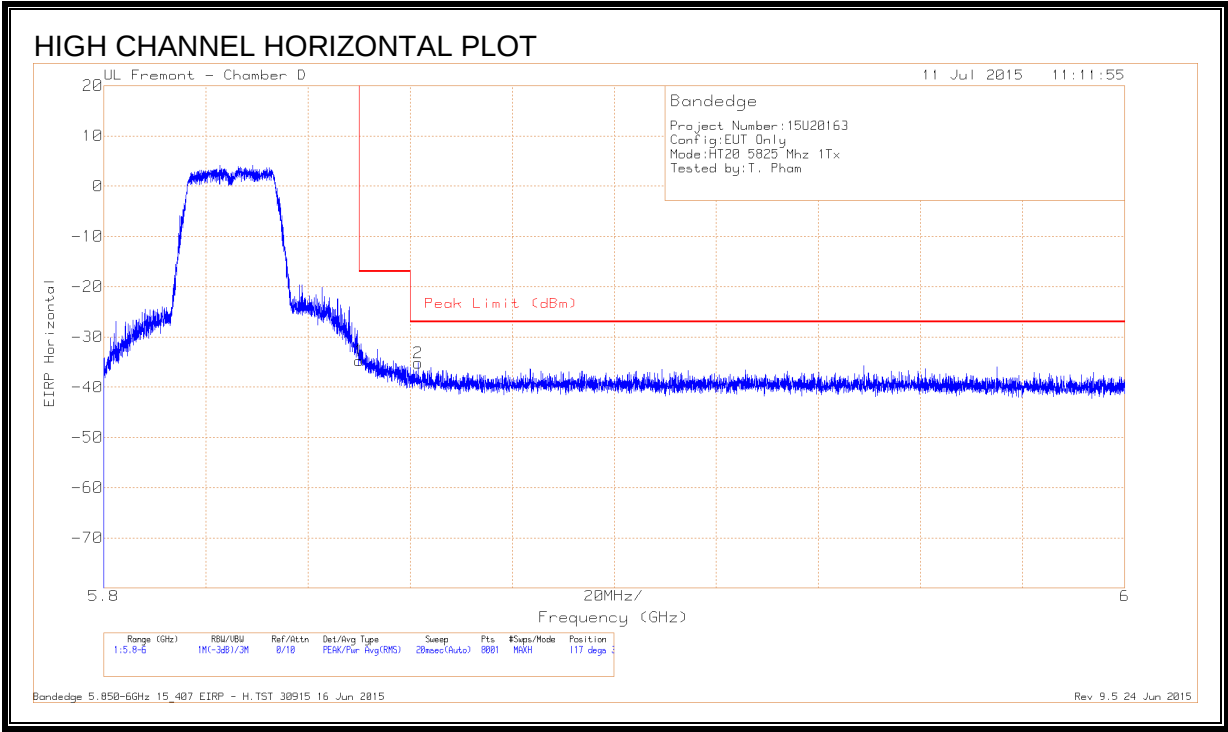

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.73	Pk	34.9	-17.7	11.8	-34.73	-17	-17.73	117	315	H
2	5.862	-64.38	Pk	35	-17.6	11.8	-35.18	-27	-8.18	117	315	H

Pk - Peak detector


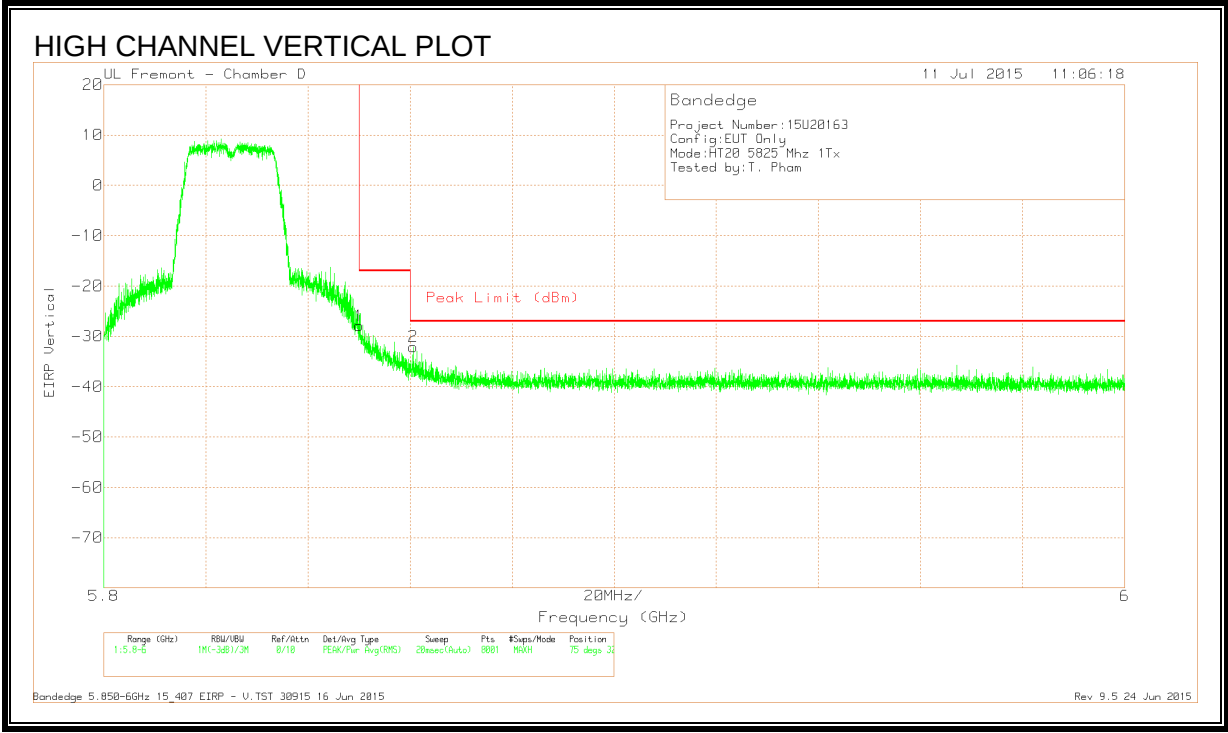


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.9	Pk	34.9	-17.7	11.8	-27.9	-17	-10.9	75	323	V
2	5.861	-61.25	Pk	35	-17.6	11.8	-32.05	-27	-5.05	75	323	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

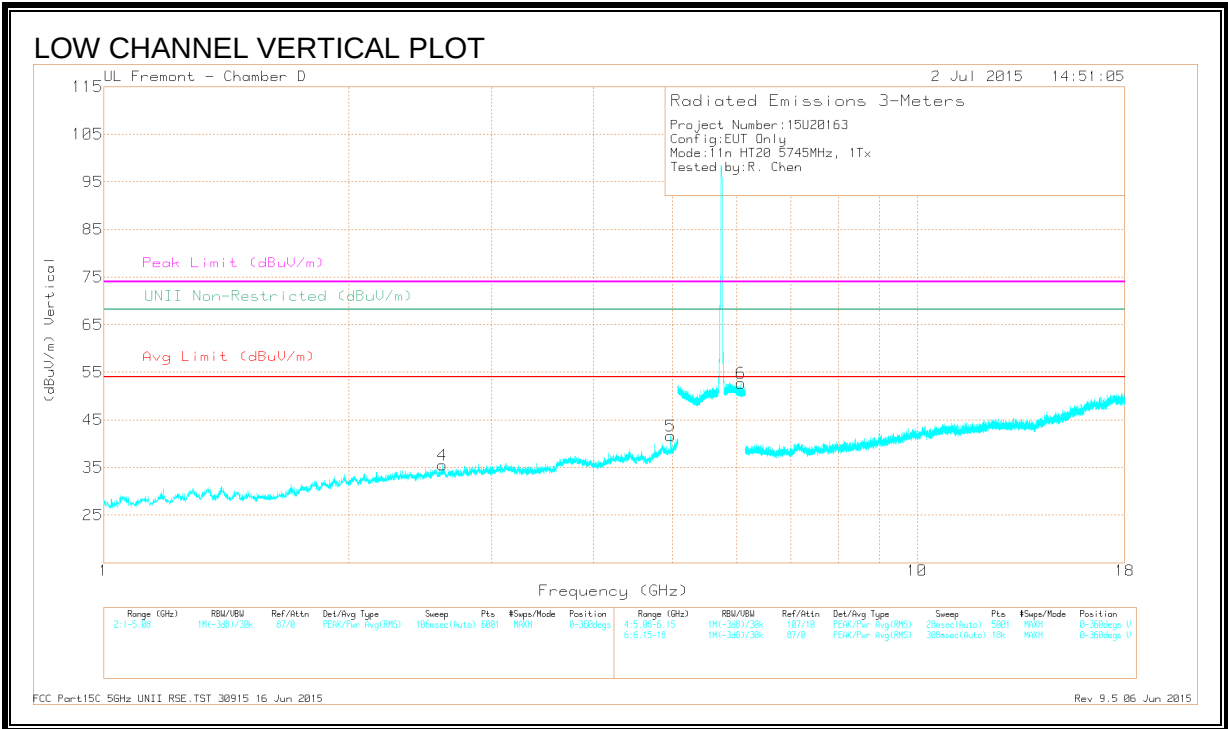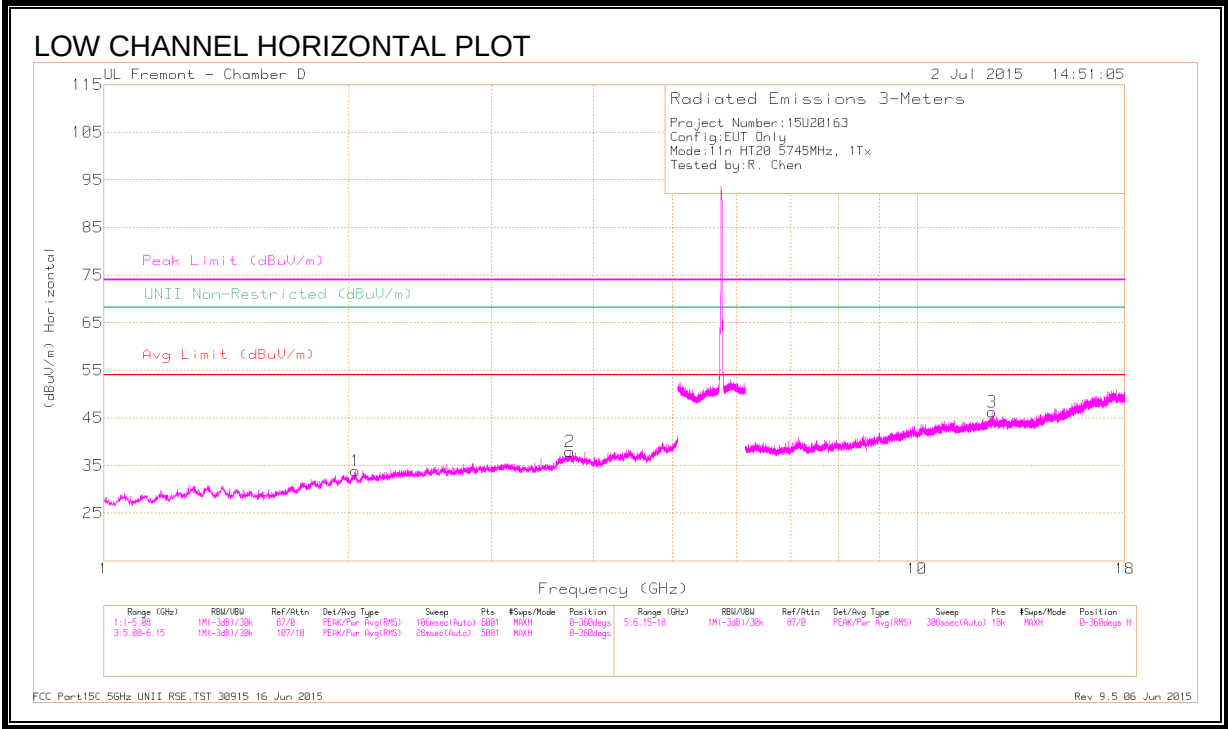

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/Filter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.043	40.2	PK3	31.2	-30.5	40.9	-	-	-	-	68.2	-27.3	152	112	H
2	* 3.741	38.52	PK3	33.3	-29.1	42.72	-	-	74	-31.28	-	-	245	201	H
	* 3.741	27.46	ADR	33.3	-29.1	31.66	54	-22.34	-	-	-	-	245	201	H
3	* 12.367	34.42	PK3	39	-21.8	51.62	-	-	74	-22.38	-	-	163	105	H
	* 12.368	23.52	ADR	39	-21.8	40.72	54	-13.28	-	-	-	-	163	105	H
4	2.609	39.51	PK3	32.4	-29.9	42.01	-	-	-	-	68.2	-26.19	299	221	V
5	* 4.98	38.28	PK3	34.2	-27	45.48	-	-	74	-28.52	-	-	304	189	V
	* 4.978	26.82	ADR	34.2	-26.9	34.12	54	-19.88	-	-	-	-	304	189	V
6	6.079	41.18	PK3	35.6	-17.8	58.98	-	-	-	-	68.2	-9.22	62	102	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

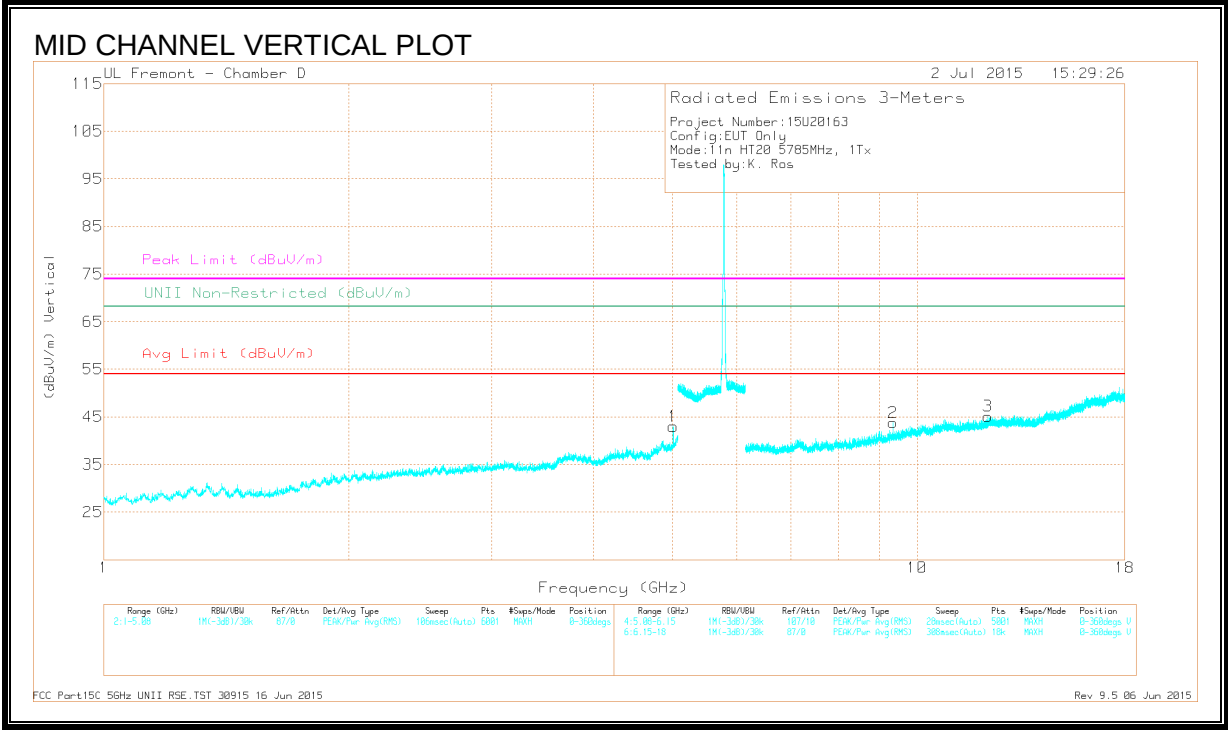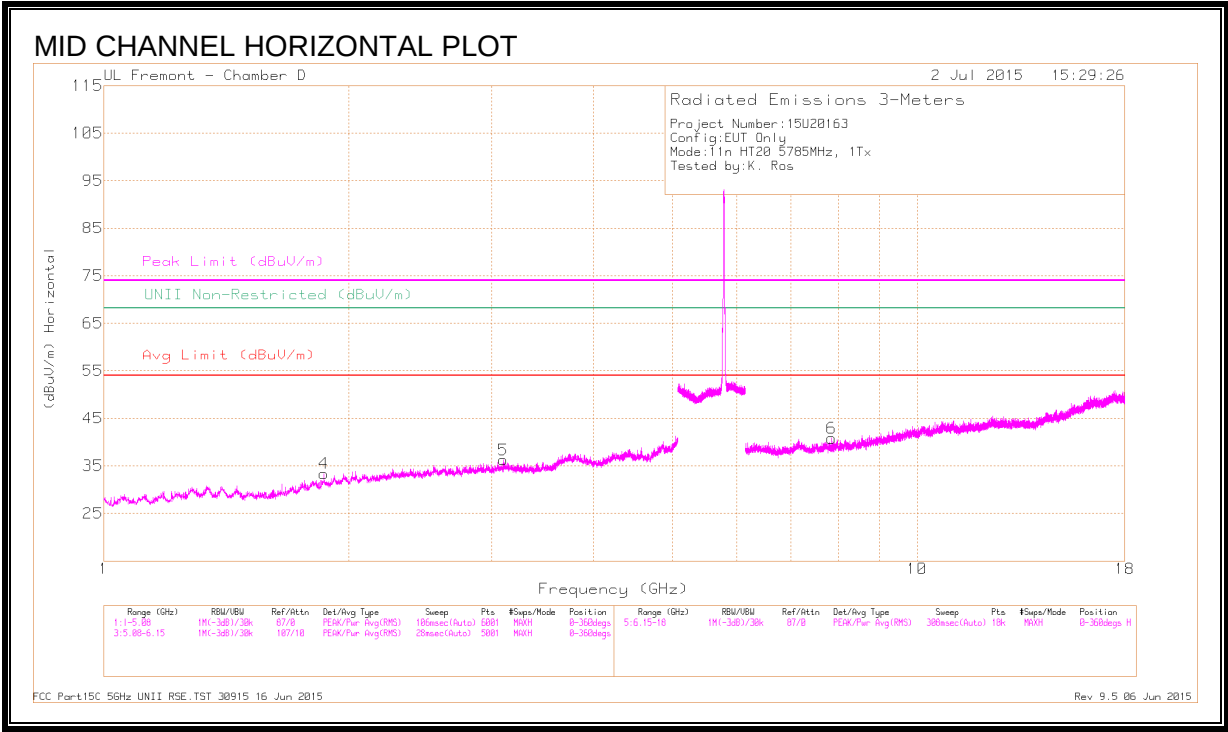

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/Filter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.014	41.49	PK3	34.3	-26.4	49.39	-	-	74	-24.61	-	-	229	186	V
	* 5.014	34.22	ADR	34.3	-26.4	42.12	54	-11.88	-	-	-	-	229	186	V
2	* 9.336	34.21	PK3	36.4	-21.9	48.71	-	-	74	-25.29	-	-	218	213	V
	* 9.335	22.82	ADR	36.4	-21.9	37.32	54	-16.68	-	-	-	-	218	213	V
3	* 12.223	34.91	PK3	38.9	-22.2	51.61	-	-	74	-22.39	-	-	304	157	V
	* 12.222	23.11	ADR	38.9	-22.2	39.81	54	-14.19	-	-	-	-	304	157	V
4	1.865	40.88	PK3	30.6	-31.4	40.08	-	-	-	-	68.2	-28.12	241	294	H
5	3.099	38.59	PK3	32.8	-29.1	42.29	-	-	-	-	68.2	-25.91	352	126	H
6	7.855	35.87	PK3	35.7	-24.8	46.77	-	-	-	-	68.2	-21.43	132	199	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

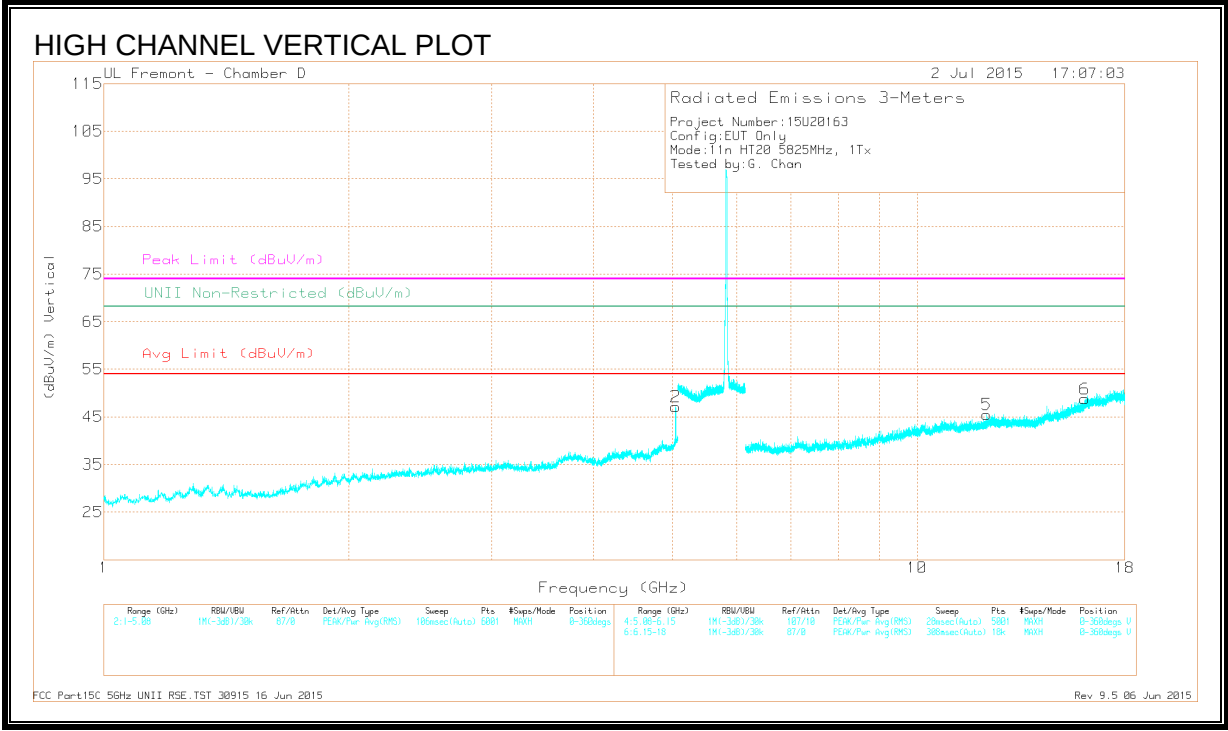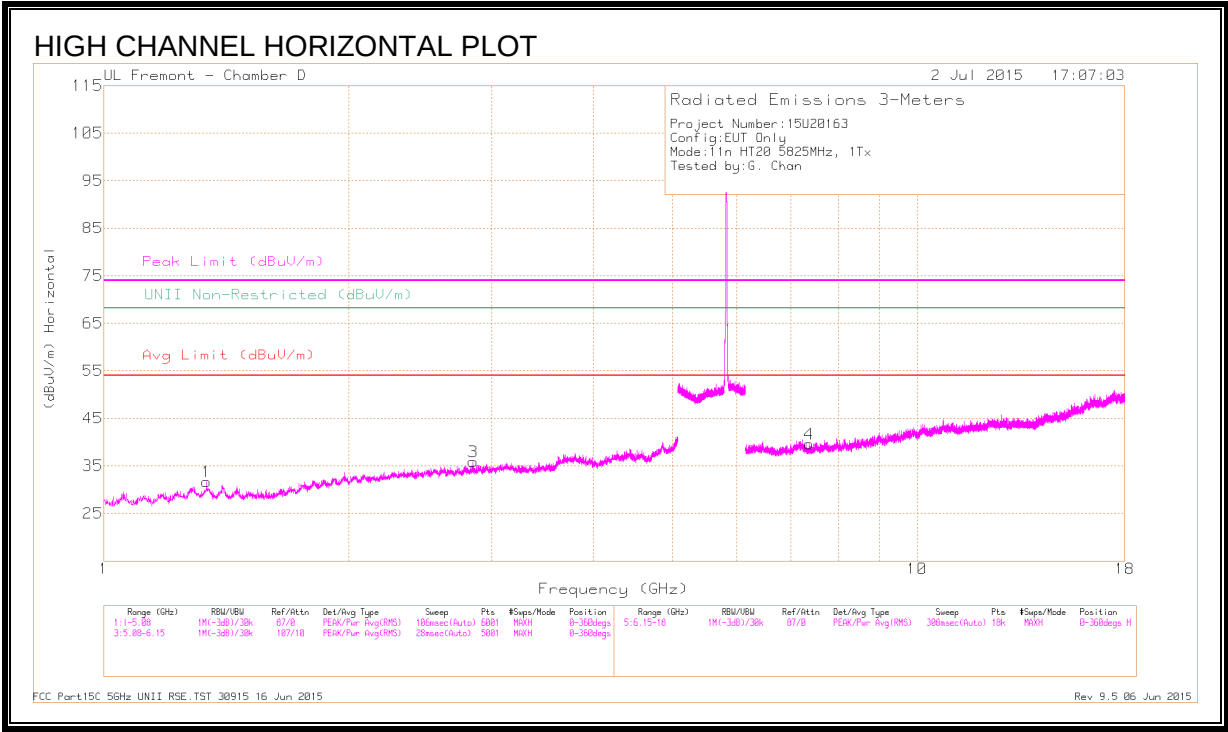

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.338	41.4	PK3	28.8	-31.5	38.7	-	-	74	-35.3	-	-	172	238	H
	* 1.339	28.98	ADR	28.8	-31.5	26.28	54	-27.72	-	-	-	-	172	238	H
3	* 2.844	38.99	PK3	32.5	-29.3	42.19	-	-	74	-31.81	-	-	16	233	H
	* 2.845	27.07	ADR	32.5	-29.3	30.27	54	-23.73	-	-	-	-	16	233	H
2	* 5.048	43.04	PK3	34.3	-25.7	51.64	-	-	74	-22.36	-	-	245	328	V
	* 5.048	36.43	ADR	34.3	-25.7	45.03	54	-8.97	-	-	-	-	245	328	V
4	* 7.369	36.43	PK3	35.5	-25.6	46.33	-	-	74	-27.67	-	-	10	167	H
	* 7.371	24.47	ADR	35.5	-25.6	34.37	54	-19.63	-	-	-	-	10	167	H
5	* 12.184	34.51	PK3	38.9	-22.5	50.91	-	-	74	-23.09	-	-	83	137	V
	* 12.182	22.97	ADR	38.9	-22.5	39.37	54	-14.63	-	-	-	-	83	137	V
6	* 16.08	34.62	PK3	41.3	-20.4	55.52	-	-	74	-18.48	-	-	111	207	V
	* 16.078	22.88	ADR	41.2	-20.5	43.58	54	-10.42	-	-	-	-	111	207	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average