



TEST REPORT

Test Report No. : UL-RPT-RP11241886JD07AG V3.0

Manufacturer : Apple Inc.
Model No. : A1779
FCC ID : BCG-E3086A
Technology : CDMA BC0
Test Standard(s) : FCC Part 22 Subpart H

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 3.0 supersedes all previous versions.

Date of Issue: 03 August 2016

Checked by:

Sarah Williams
Engineer, Radio Laboratory

**Company
Signatory:**

Steven White
Service Lead, Radio Laboratory
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its terms
of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	8
4. Operation and Monitoring of the EUT during Testing	9
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
5. Measurements, Examinations and Derived Results.....	10
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter E.R.P. - LAT	11
5.2.2. Transmitter E.R.P. - UAT	14
5.2.3. Transmitter Occupied Bandwidth	17
5.2.4. Transmitter Out of Band Radiated Emissions - LAT	22
5.2.5. Transmitter Out of Band Radiated Emissions - UAT	25
5.2.6. Transmitter Radiated Emissions at Band Edges - LAT	28
5.2.7. Transmitter Radiated Emissions at Band Edges - UAT	36
5.2.8. Transmitter Frequency Stability (Temperature Variation)	40
5.2.9. Transmitter Frequency Stability (Voltage Variation)	42
6. Measurement Uncertainty	43
7. Report Revision History	44

1. Customer Information

Company Name:	Apple Inc.
Address:	1 Infinite Loop Cupertino, CA 95014 U.S.A

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR22
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 22 Subpart H (Public Mobile Services)
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	18 June 2016 to 11 July 2016

2.2. Summary of Test Results

FCC Reference	Measurement	Result
Part 22.913(a)(2)	Transmitter E.R.P.	✓
Part 2.1049	Transmitter Occupied Bandwidth	✓
Parts 2.1053 & 22.917	Transmitter Out of Band Radiated Emissions	✓
Parts 2.1053 & 22.917	Transmitter Band Edge Radiated Emissions	✓
Part 2.1055/22.355	Transmitter Frequency Stability (Temperature and Voltage Variation)	✓

Key to Results

✓ = Complied ✘ = Did not comply

2.3. Methods and Procedures

Reference:	FCC KDB 971168 D01 v02r02, October 17 2014
Title:	Measurement Guidance for Certification of Licensed Digital Transmitters

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample ESN:	802CBA76 (<i>Conducted sample #1</i>)
Test Sample MEID:	N/A
Hardware Version:	REV1.0
Software Version:	OS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample ESN:	80605FD5 (<i>Conducted sample #63</i>)
Test Sample MEID:	35864007009801
Hardware Version:	REV1.0
Software Version:	OS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample ESN:	80BE0350 (<i>Conducted sample #34</i>)
Test Sample MEID:	N/A
Hardware Version:	REV1.0
Software Version:	OS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample ESN:	8009F1B2 (<i>Radiated sample #36</i>)
Test Sample MEID:	35864007003321
Hardware Version:	REV1.0
Software Version:	OS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample ESN:	8010C1F5 (<i>Radiated sample #38</i>)
Test Sample MEID:	35864007000102
Hardware Version:	REV1.0
Software Version:	OS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample ESN:	229B12F6 (<i>Radiated sample</i>)
Test Sample MEID:	35864007000102
Hardware Version:	REV1.0
Software Version:	OS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

3.2. Description of EUT

The Equipment Under Test was a mobile phone with GSM/GPRS/EGPRS/UMTS/LTE/TD-SCDMA and CDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The rechargeable battery is not user accessible.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	CDMA BC0		
Type of Radio Device:	Transceiver		
Modes:	1xRTT, EV-DO Rev 0, EV-DO Rev A		
Modulation Type:	O-QPSK & H-PSK		
Power Supply Requirement(s):	Nominal	3.8 VDC	
	Minimum	3.5 VDC	
	Maximum	4.4 VDC	
Transmit Frequency Range:	824 to 849 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1013	824.7
	Middle	384	836.52
	Top	777	848.31

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop PC
Brand Name:	Thinkpad
Model Name or Number:	Lenovo L440
Serial Number:	R9-019EA2 14/4

Description:	USB diagnostic cable
Brand Name:	Not stated
Model Name or Number:	Kong
Serial Number:	2074F9

Description:	Personal Hands Free (PHF)
Brand Name:	Apple
Model Name or Number:	Apple Ear Plugs
Serial Number:	Not stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Constantly transmitting at full power on bottom, middle and top channels as required.
- Occupied bandwidth, conducted power and band edge tests were performed with the EUT in 1xRTT and EV-DO modes.
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. 1xRTT RC 1/1 was found to be the worst case and all final measurements were performed with the EUT in this mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT was placed into a non-ui mode by using the teraterm application on a UL laptop PC. Instructions were provided by the customer to enable the baseband and radio (*Cellular_RSE_setup_V3.0.doc*). This enabled the EUT to connect via a radiated link with the Rohde & Schwarz CMW 500 system simulator operating in transceiver mode. The CMW 500 was used to configure the EUT operating mode.
- Transmitter radiated spurious emissions tests were performed with the PHF connected to the EUT as the declared by the customer. The EUT was placed in three orthogonal orientations X, Y and Z to determine the worst case orientation for radiated spurious emissions. The worst case orientation for the LAT was Z and for the UAT was Z. Measurements at band edges were performed with the PHF removed as this was found to be the worst case.
- The worst-case radiated emission among all accessories, is determined by the manufacturer to be with the headset connected. The compliance lab performed final testing only with the headset attached.
- Testing for frequency stability and measurements at temperature and voltage extremes were performed using a conducted sample supplied by the customer. Short 4-wire DC flying leads were connected internally to the device in place of the battery, and exited through a hole in the casing. These leads were then extended to a DC power supply for testing purposes.
- For conducted cellular measurements, the RF conducted port was created by removing a micro connector from the PCB antenna and extending it with a short flexible microstrip supplied by the customer. This microstrip exited the device through a hole in the casing and was terminated in a proprietary micro-coax to SMA adaptor.
- The device contains two cellular antennas which do not transmit simultaneously.
 - LAT – Lower Antenna (Primary)
 - UAT – Upper Antenna (Secondary)

Where applicable, both antennas have been tested to demonstrate compliance.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter E.R.P. - LAT

Test Summary:

Test Engineer:	John Ferdinand	Test Dates:	16 June 2016 to 30 June 2016
Test Sample ESN:	802CBA76		

FCC Reference:	Part 22.913(a)(2)
Test Method Used:	KDB 971168 D01 Section 2.2 footnote 1 & notes below

Environmental Conditions:


Temperature (°C):	20 to 24
Relative Humidity (%):	38 to 43

Note(s):

1. Transmitter average output power was measured using a Rohde & Schwarz CMW 500 following current Rohde & Schwarz measurement procedures. All configurations were tested with the EUT transmitting at maximum power on the bottom, middle and top channels. An RF level offset was entered on the CMW 500 to compensate for the loss of the attenuator and RF cables.
2. The manufacturer stated a maximum antenna gain of -3.74 dBi. The gain in dBi has been converted to gain in dBd for E.R.P. calculation. The gain in dBd was calculated as:

$$-3.74 \text{ dBi} - 2.15 \text{ dB} = -5.89 \text{ dBd}$$
3. The antenna gain was added to the conducted output power to obtain the radiated power. The highest power recorded was subtracted from the limit to show the margin.

Test setup:

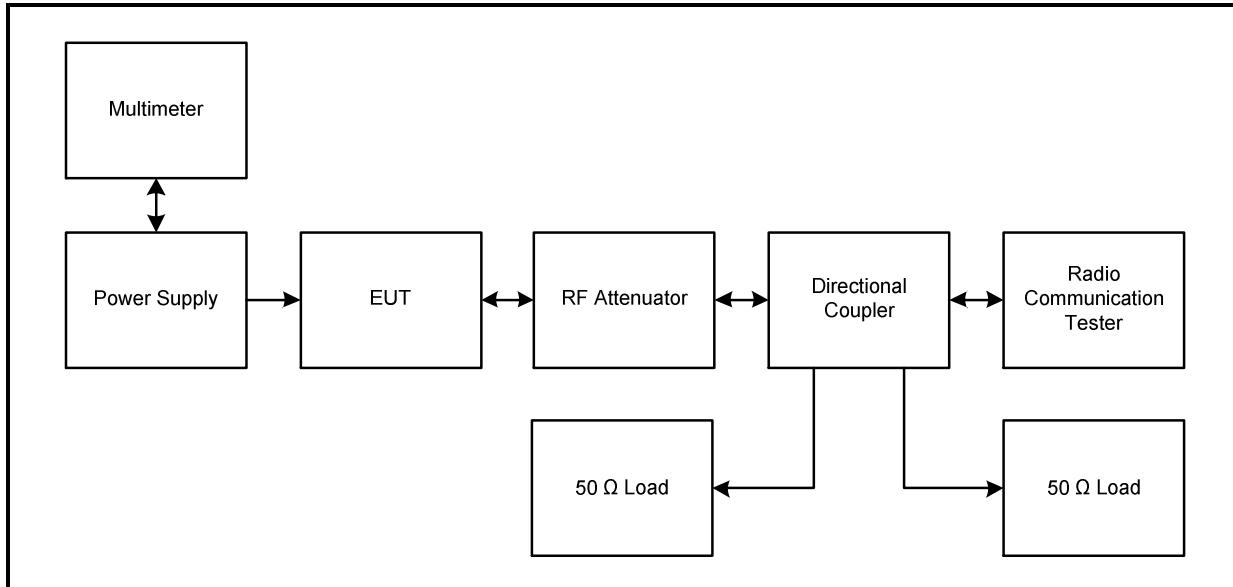

Transmitter E.R.P. (continued)**Results: 1xRTT**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)		
		Ch. 1013 / 824.7 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
		Average	Average	Average
RC1	2 (Loopback)	24.8	24.7	25.0
	55 (Loopback)	24.8	24.7	25.0
RC2	9 (Loopback)	24.9	24.7	24.9
	55 (Loopback)	24.8	24.7	24.8
RC3	2 (Loopback)	24.8	24.7	25.0
	55 (Loopback)	24.8	24.8	25.0
	32 (Test Data)	24.8	24.7	25.0
RC4	2 (Loopback)	24.9	24.7	25.0
	55 (Loopback)	24.9	24.7	25.0
	32 (Test Data)	24.9	24.7	24.9
RC5	9 (Loopback)	24.9	24.9	25.0
	55 (Loopback)	24.9	24.8	25.0

Channel	Frequency (MHz)	Highest Conducted Output Power (dBm)	Antenna Gain (dBi)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.7	24.9	-5.89	19.01	38.45	19.44	Complied
Middle	836.52	24.9	-5.89	19.01	38.45	19.44	Complied
Top	848.31	25.0	-5.89	19.11	38.45	19.34	Complied

Transmitter E.R.P. (continued)**Results: EV-DO Rev. 0**

FTAP Rate	RTAP Rate	Average Conducted Output Power (dBm)		
		Ch. 1013 / 824.7 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
307.2 kbit/s	153.6 kbit/s	24.9	24.9	24.7

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.7	24.9	-5.89	19.01	38.45	19.44	Complied
Middle	836.52	24.9	-5.89	19.01	38.45	19.44	Complied
Top	848.31	24.7	-5.89	18.81	38.45	19.64	Complied

Results: EV-DO Rev. A

FETAP Format	RETAP Data Payload Size	Average Conducted Output Power (dBm)		
		Ch. 1013 / 824.7 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
307.2 kbit/s	4096 bits	25.0	25.0	24.4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.7	25.0	-5.89	19.11	38.45	19.34	Complied
Middle	836.52	25.0	-5.89	19.11	38.45	19.34	Complied
Top	848.31	24.4	-5.89	18.51	38.45	19.94	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	#1	02 Apr 2017	12
A2502	Directional Coupler	AtlanTecRF	CDC-003060	22501837	Calibrated before use	-
M1876	Radio Comms Tester	Rohde & Schwarz	CMW500	145919	Calibrated before use	-
M1869	Radio Comms Tester	Rohde & Schwarz	CMW500	145923	05 Apr 2017	12
M1883	Signal Analyser	Rohde & Schwarz	FSV	103003	09 May 2017	12
A2924	Attenuator	AtlanTecRF	AN18W5-20	None Stated	Calibrated before use	-

5.2.2. Transmitter E.R.P. - UAT

Test Summary:

Test Engineer:	John Ferdinand	Test Dates:	16 June 2016 to 30 June 2016
Test Sample ESN:	80605FD5		

FCC Reference:	Part 22.913(a)(2)
Test Method Used:	KDB 971168 D01 Section 2.2 footnote 1 & notes below

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	38 to 43


Note(s):

1. Transmitter average output power was measured using a Rohde & Schwarz CMW 500 following current Rohde & Schwarz measurement procedures. An RF level offset was entered on the CMW 500 to compensate for the loss of the directional coupler, attenuators and RF cables.
2. The manufacturer stated a maximum antenna gain of -2.89 dBi. The gain in dBi has been converted to gain in dBd for E.R.P. calculation. The gain in dBd was calculated as:

$$-2.89 \text{ dBi} - 2.15 \text{ dB} = -5.04 \text{ dBd}$$

3. The antenna gain was added to the conducted output power to obtain the radiated power. The highest power recorded was subtracted from the limit to show the margin.

Test setup:

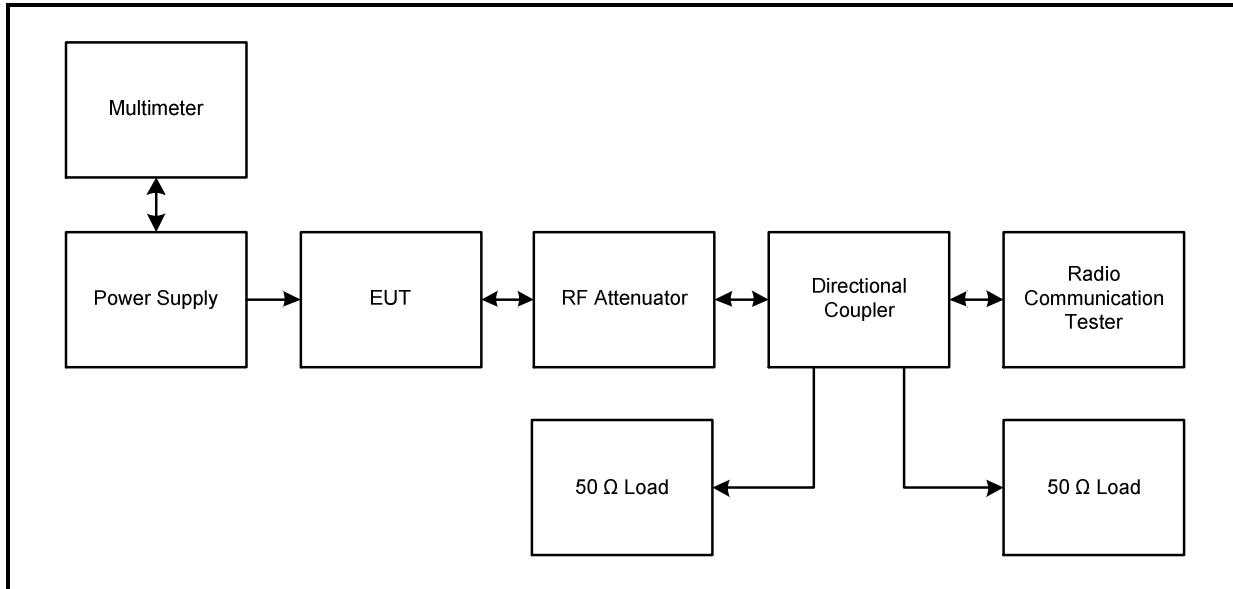

Transmitter E.R.P. (continued)**Results: 1xRTT**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)		
		Ch. 1013 / 824.7 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
		Average	Average	Average
RC1	2 (Loopback)	21.1	21.0	21.1
	55 (Loopback)	21.1	21.0	21.1
RC2	9 (Loopback)	21.1	21.0	21.1
	55 (Loopback)	21.1	21.0	21.1
RC3	2 (Loopback)	21.0	20.9	21.1
	55 (Loopback)	21.0	20.9	21.1
	32 (Test Data)	21.0	20.9	21.1
RC4	2 (Loopback)	21.0	21.0	21.1
	55 (Loopback)	21.0	21.0	21.1
	32 (Test Data)	21.0	21.0	21.1
RC5	9 (Loopback)	21.0	21.0	21.1
	55 (Loopback)	21.0	21.0	21.1

Channel	Frequency (MHz)	Highest Conducted Output Power (dBm)	Antenna Gain (dBi)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.7	21.1	-5.04	16.06	38.45	22.39	Complied
Middle	836.52	21.0	-5.04	15.96	38.45	22.49	Complied
Top	848.31	21.1	-5.04	16.06	38.45	22.39	Complied

Transmitter E.R.P. (continued)**Results: EV-DO Rev. 0**

FTAP Rate	RTAP Rate	Average Conducted Output Power (dBm)		
		Ch. 1013 / 824.7 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
307.2 kbit/s	153.6 kbit/s	21.3	21.2	21.3

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.7	21.3	-5.04	16.26	38.45	22.19	Complied
Middle	836.52	21.2	-5.04	16.16	38.45	22.29	Complied
Top	848.31	21.3	-5.04	16.26	38.45	22.19	Complied

Results: EV-DO Rev. A

FETAP Format	RETAP Data Payload Size	Average Conducted Output Power (dBm)		
		Ch. 1013 / 824.7 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
307.2 kbit/s	4096 bits	21.2	21.2	21.4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.7	21.2	-5.04	16.16	38.45	22.29	Complied
Middle	836.52	21.2	-5.04	16.16	38.45	22.29	Complied
Top	848.31	21.4	-5.04	16.36	38.45	20.09	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	#1	02 Apr 2017	12
A2502	Directional Coupler	AtlanTecRF	CDC-003060	22501837	Calibrated before use	-
M1876	Radio Comms Tester	Rohde & Schwarz	CMW500	145919	Calibrated before use	-
M1869	Radio Comms Tester	Rohde & Schwarz	CMW500	145923	05 Apr 2017	12
M1883	Signal Analyser	Rohde & Schwarz	FSV	103003	09 May 2017	12
A2924	Attenuator	AtlanTecRF	AN18W5-20	None Stated	Calibrated before use	-

5.2.3. Transmitter Occupied Bandwidth

Test Summary:

Test Engineer:	John Ferdinand	Test Dates:	16 June 2016 to 01 July 2016
Test Sample ESN:	802CBA76		

FCC Reference:	Part 2.1049
Test Method Used:	FCC KDB 971168 D01 Sections 4.1 & 4.2


Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	38 to 43

Note(s):




1. Occupied bandwidth (99% bandwidth) was measured using a signal analyser occupied bandwidth function. -26 dB bandwidths were also measured.
2. The RF port of the EUT was connected to the signal analyser via RF cables, directional coupler and suitable attenuation.

Test setup:

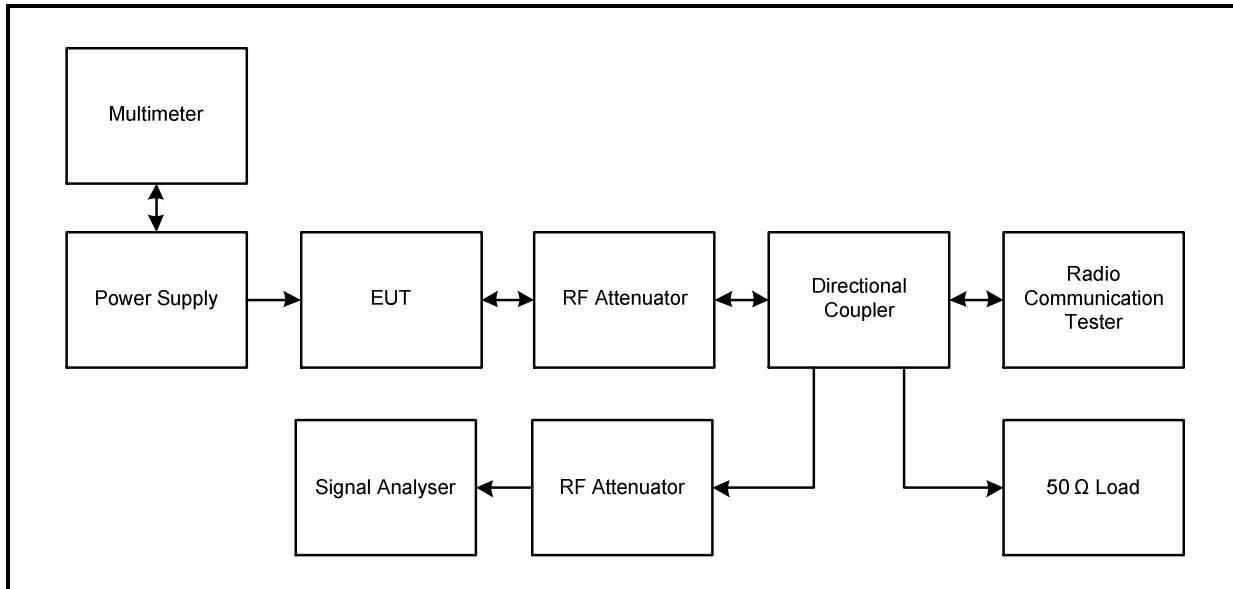




Transmitter Occupied Bandwidth (continued)**Results: 1xRTT**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)
Bottom	824.7	1273.517
Middle	836.52	1273.517
Top	848.31	1280.753

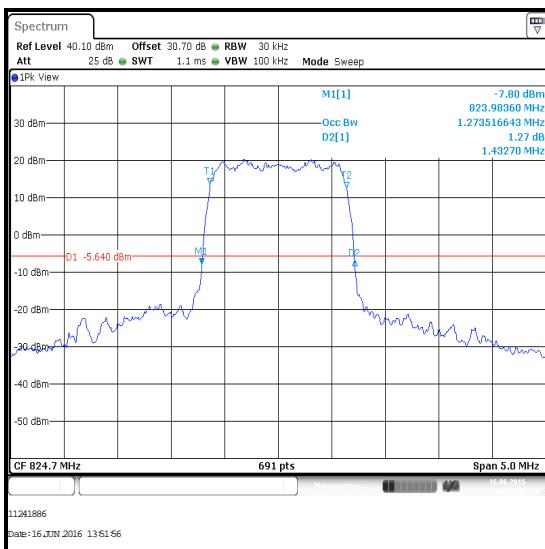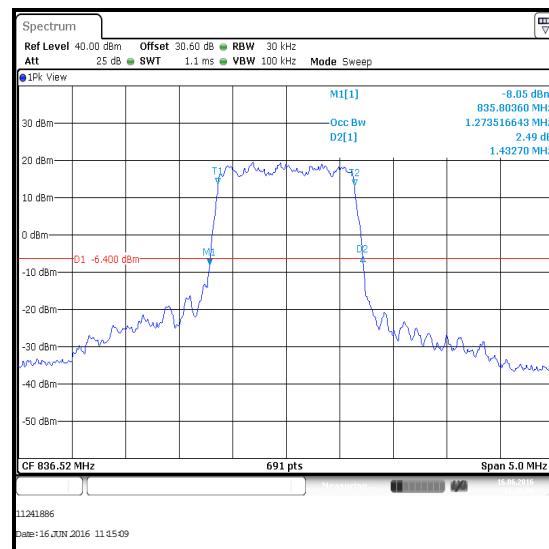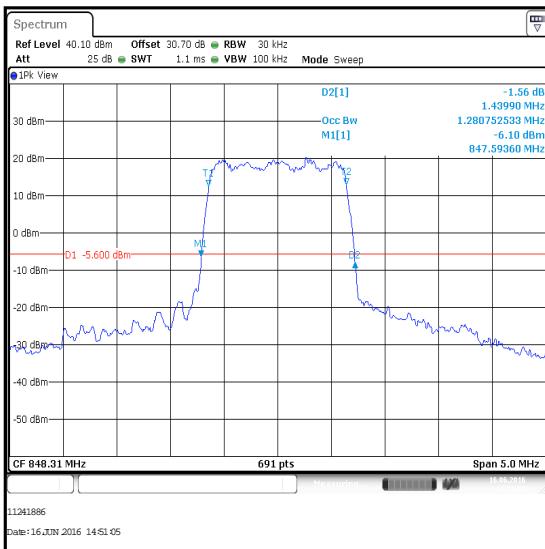**Bottom Channel****Middle Channel****Top Channel**




Transmitter Occupied Bandwidth (continued)**Results: EV-DO Rev. 0**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)
Bottom	824.7	1273.517
Middle	836.52	1273.517
Top	848.31	1280.752

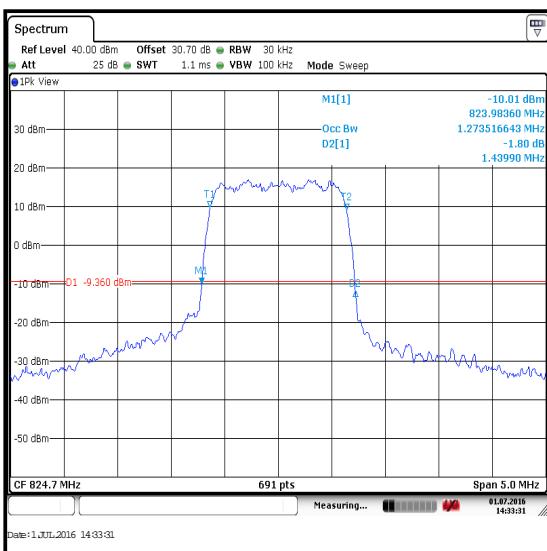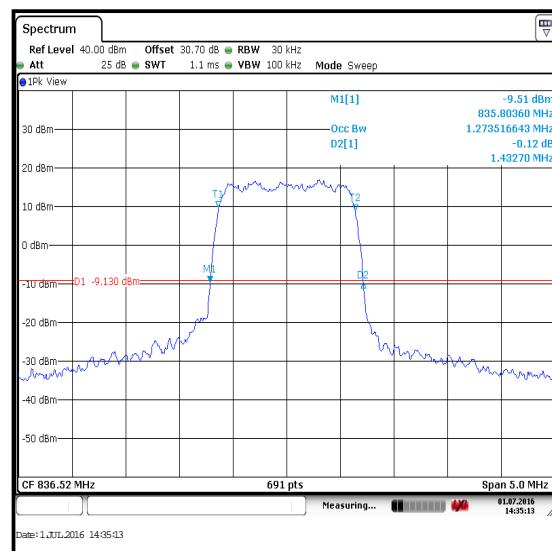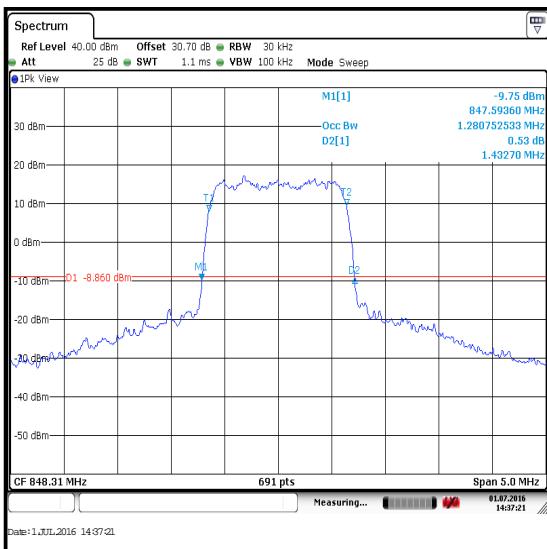**Bottom Channel****Middle Channel****Top Channel**

Transmitter Occupied Bandwidth (continued)**Results: EV-DO Rev. A**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)
Bottom	824.7	1273.517
Middle	836.52	1273.517
Top	848.31	1280.753

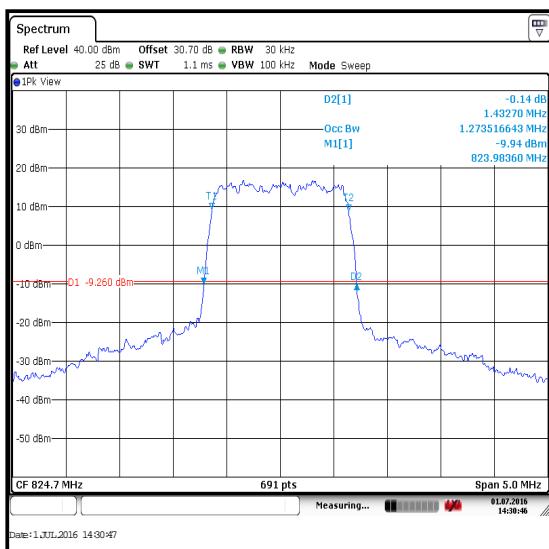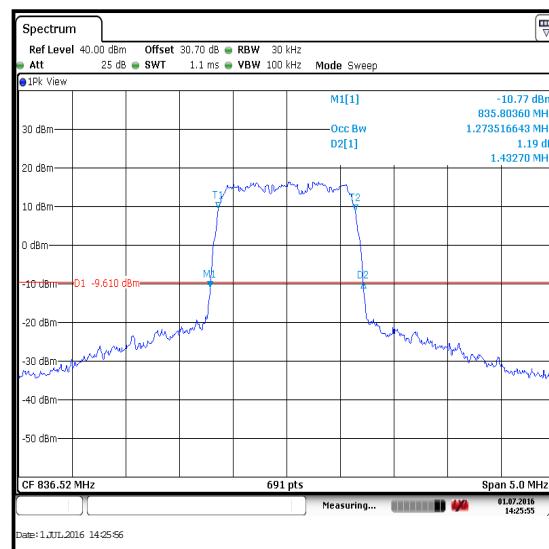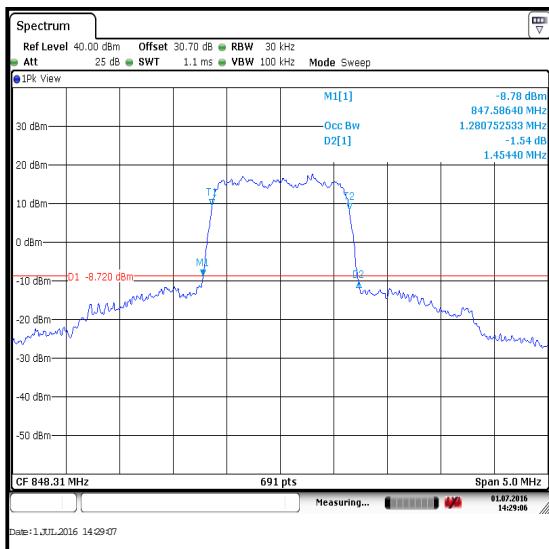**Bottom Channel****Middle Channel****Top Channel**

Transmitter Occupied Bandwidth (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelpunkt	30.5015.13	#1	02 Apr 2017	12
A2502	Directional Coupler	AtlanTecRF	CDC-003060	22501837	Calibrated before use	-
M1883	Signal Analyser	Rohde & Schwarz	FSV	103003	09 May 2017	12
A2920	Attenuator	AlanTecRF	AN18W5-20	None Stated	Calibrated before use	-

5.2.4. Transmitter Out of Band Radiated Emissions - LAT

Test Summary:

Test Engineer:	John Ferdinand	Test Dates:	18 June 2016 & 20 June 2016
Test Sample ESN:	8009F1B2		

FCC Reference:	Parts 2.1053 / 22.917
Test Method Used:	KDB 971168 D01 Section 6, Section 7 & notes below
Frequency Range:	30 MHz to 9 GHz
Configuration:	1xRTT RC1/1


Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	38 to 43

Note(s):





1. The uplink traffic channel is shown on the 30 MHz to 1 GHz plot.
2. All emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient or > 20 dB below the applicable limit. The highest spurious emission level was recorded.
3. Middle channel results are recorded in this report and are representative of bottom and top channel results which are held on the UL IT server and available for inspection on request.
4. Pre-scans were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. A peak detector and trace mode of Max Hold were used to perform pre-scans, with markers placed on the highest measured levels.
5. Radiated spurious emission testing between 150 kHz and 30 MHz was performed for support of the NFC test report. No spurious emissions were observed above the noise floor of the measurement system.


Test setup:

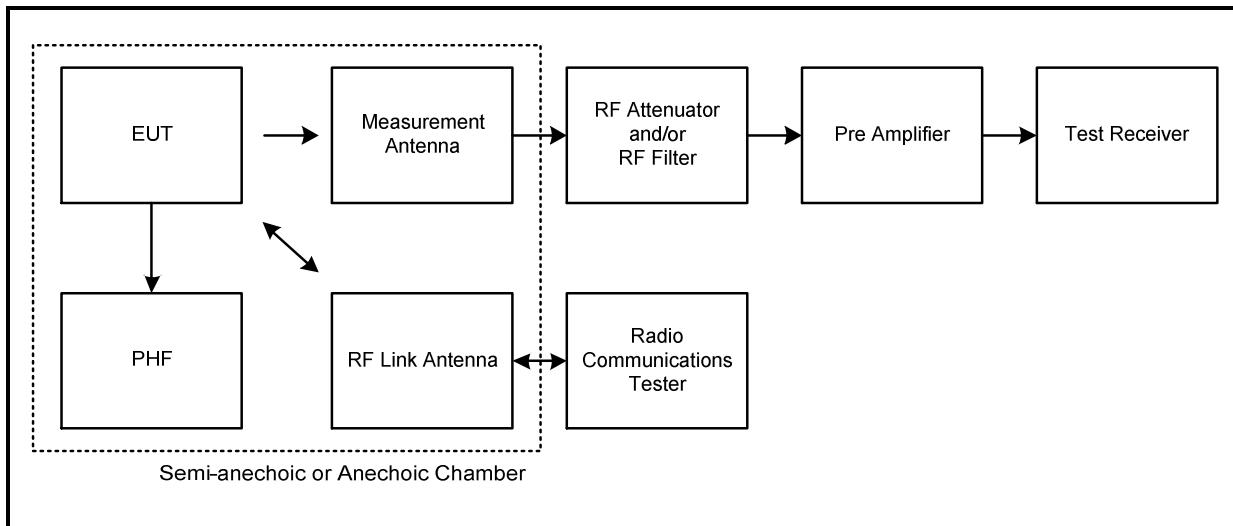

Transmitter Out of Band Radiated Emissions - LAT (continued)**Results: 1xRTT RC1/1 - Mid Channel**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1673.077	-46.3	-13.0	33.3	Complied

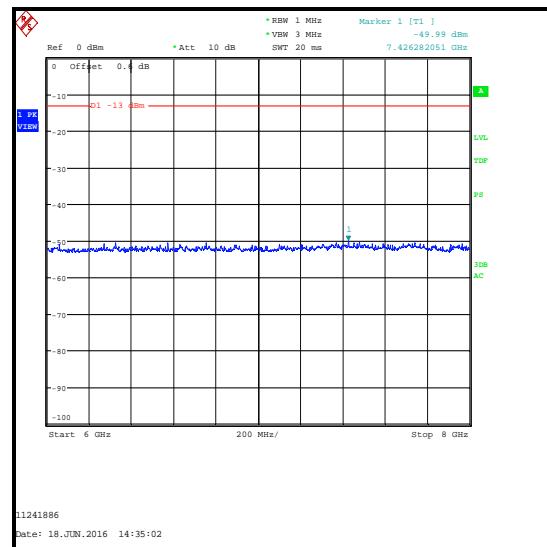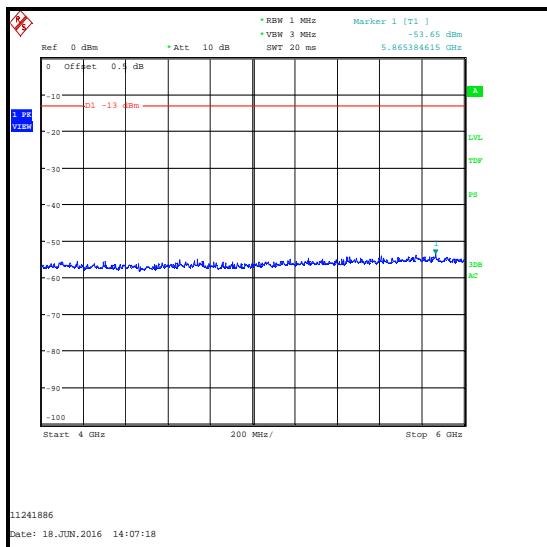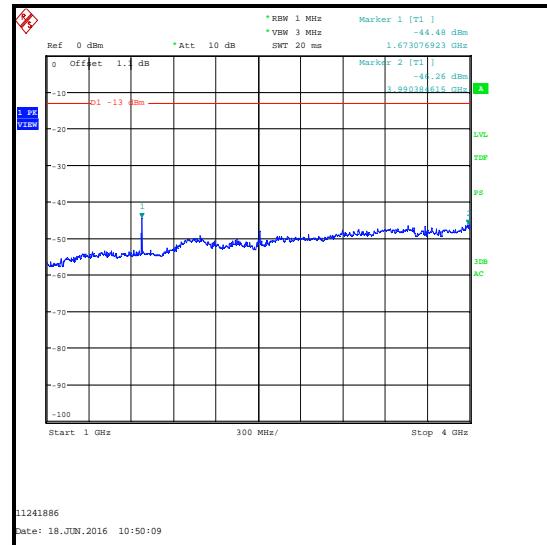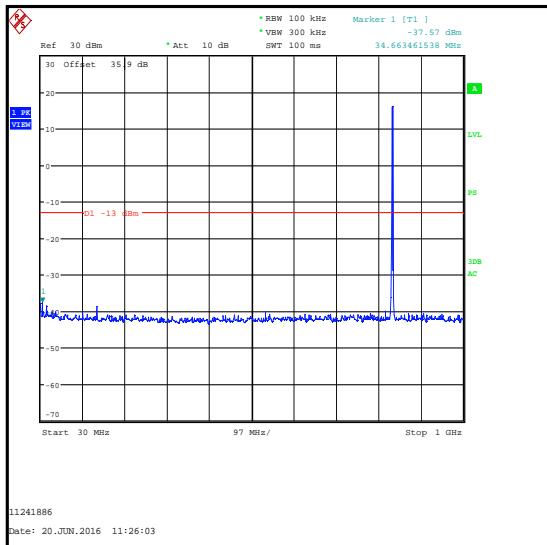

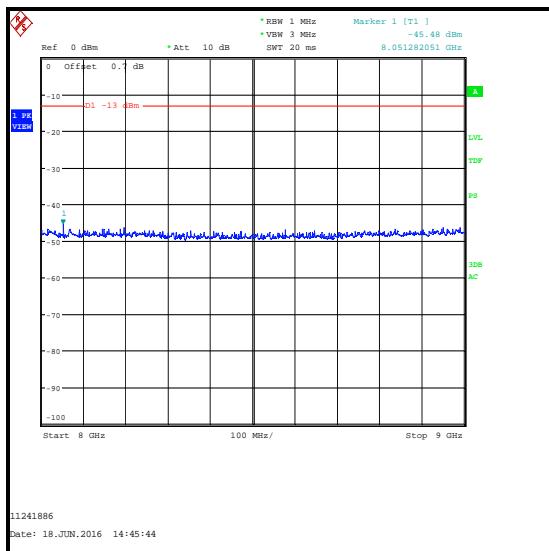Transmitter Out of Band Radiated Emissions - LAT (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	#1	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	19 Dec 2016	12
A288	Antenna	Chase	CBL6111A	1589	27 Aug 2016	12
A1818	Antenna	EMCO	00075692	3118	17 Dec 2016	12
A253	Antenna	Flann Microwave	12240-20	128	17 Dec 2016	12
A254	Antenna	Flann Microwave	14240-20	139	17 Dec 2016	12
A255	Antenna	Flann Microwave	16240-20	519	17 Dec 2016	12
M1886	Test Receiver	Rohde and Schwarz	ESU26	100554	21 Mar 2017	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	30 Apr 2017	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	26 Apr 2017	12
A2467	High Pass Filter	Wainwright Instruments	WHJE5-920	SN2	09 Mar 2017	12

5.2.5. Transmitter Out of Band Radiated Emissions - UAT**Test Summary:**

Test Engineer:	John Ferdinand	Test Dates:	18 June 2016 & 20 June 2016
Test Sample ESN:	8010C1F5		

FCC Reference:	Parts 2.1053 / 22.917
Test Method Used:	KDB 971168 D01 Section 6, Section 7 & notes below
Frequency Range:	30 MHz to 9 GHz
Configuration:	1xRTT RC1/1

Environmental Conditions:




Temperature (°C):	20 to 24
Relative Humidity (%):	38 to 43


Note(s):

1. The uplink traffic channel is shown on the 30 MHz to 1 GHz plot.
2. All emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient or > 20 dB below the applicable limit. The highest noise floor level was recorded.
3. Middle channel results are recorded in this report and are representative of bottom and top channel results which are held on the UL IT server and available for inspection on request.
4. Pre-scans were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. A peak detector and trace mode of Max Hold were used to perform pre-scans, with markers placed on the highest measured levels.
5. Radiated spurious emission testing between 150 kHz and 30 MHz was performed for support of the NFC test report. No spurious emissions were observed above the noise floor of the measurement system.

Transmitter Out of Band Radiated Emissions - UAT (continued)**Results: 1xRTT RC1/1 - Mid Channel**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
40.881	-36.1	-13.0	23.1	Complied

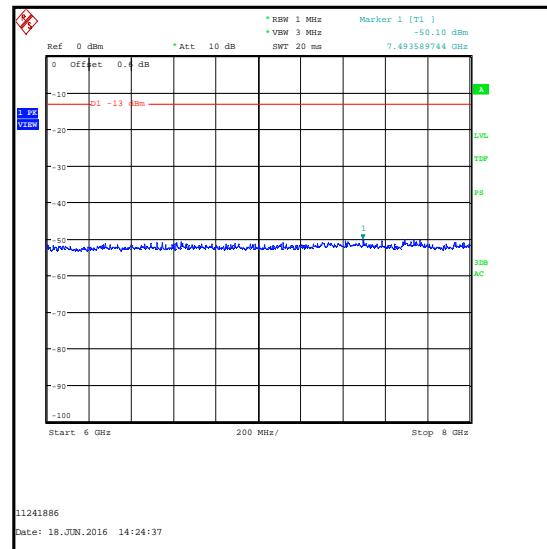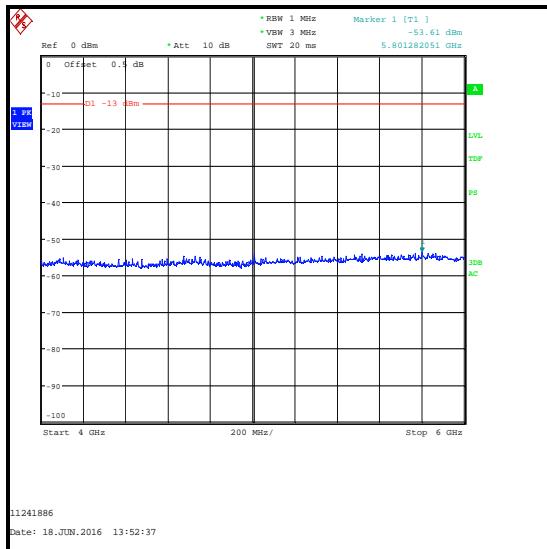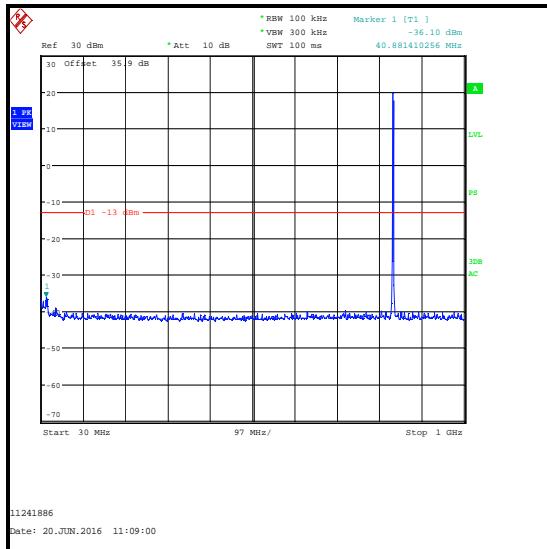

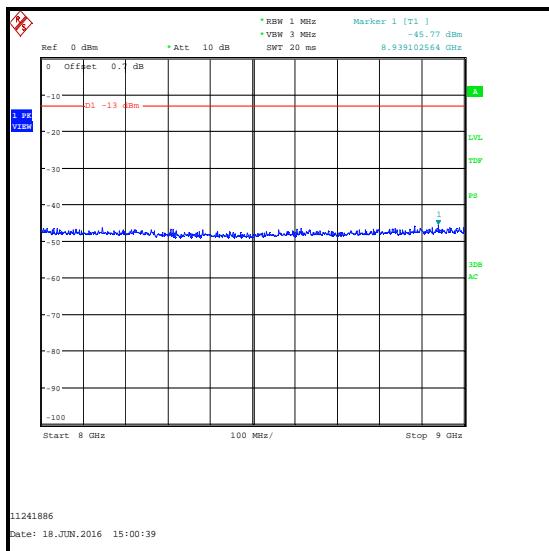Transmitter Out of Band Radiated Emissions - UAT (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	#1	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	19 Dec 2016	12
A288	Antenna	Chase	CBL6111A	1589	27 Aug 2016	12
A1818	Antenna	EMCO	00075692	3118	17 Dec 2016	12
A253	Antenna	Flann Microwave	12240-20	128	17 Dec 2016	12
A254	Antenna	Flann Microwave	14240-20	139	17 Dec 2016	12
A255	Antenna	Flann Microwave	16240-20	519	17 Dec 2016	12
M1886	Test Receiver	Rohde and Schwarz	ESU26	100554	21 Mar 2017	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	30 Apr 2017	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	26 Apr 2017	12
A2467	High Pass Filter	Wainwright Instruments	WHJE5-920	SN2	09 Mar 2017	12

5.2.6. Transmitter Radiated Emissions at Band Edges - LAT**Test Summary:**

Test Engineer:	Ian Watch	Test Date:	11 July 2016
Test Sample ESN:	8009F1B2 & 229B12F6		

FCC Reference:	Parts 2.1053 / 22.917
Test Method Used:	KDB 971168 D01 Section 6, Section 7 & notes below

Environmental Conditions:


Temperature (°C):	22
Relative Humidity (%):	45

Note(s):

1. Measurements were performed in a semi anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 0.8 metres above the test chamber floor in the centre of the chamber turntable. The measurement antenna was height searched from 1 to 4 metres.
2. Measurement bandwidth used was approximately 1% of the emission bandwidth. The test receiver channel power function was used to measure the first 15 kHz outside the band edges. Measurements were performed from -1 MHz to the lower band edge and the upper band edge +1 MHz. The highest emission levels were recorded.

Transmitter Radiated Emissions at Band Edges (continued)**Results: 1xRTT**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-20.3	-13.0	7.3	Complied
849	-15.7	-13.0	2.7	Complied

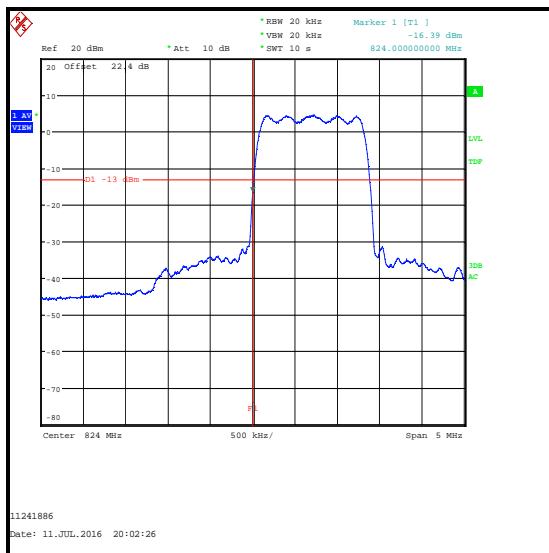

Lower band edge/Bottom channel

Lower band edge/Bottom channel
Band edge to 15 kHz below band edge/channel powerLower band edge/Bottom channel
1 MHz below to 15 kHz below band edge

Transmitter Radiated Emissions at Band Edges (continued)


Results: 1xRTT



Upper band edge/Top channel




Upper band edge/Top channel
Band edge to 15 kHz above band edge/channel power

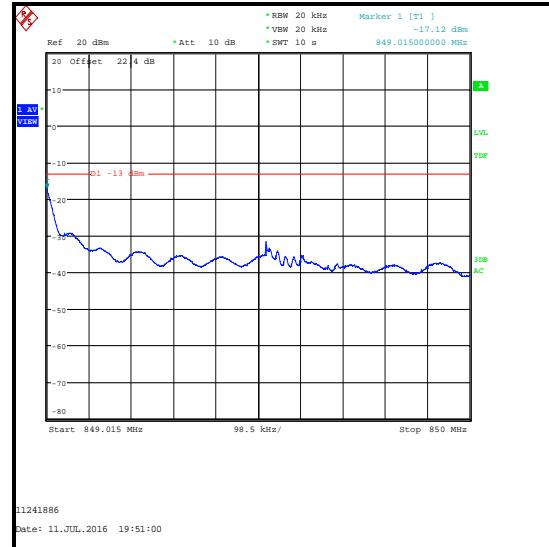


Upper band edge/Top channel
15 kHz above band edge to 1 MHz above band edge

Transmitter Radiated Emissions at Band Edges (continued)**Results: EV-DO Rev. 0**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-19.6	-13.0	6.6	Complied
849	-15.0	-13.0	2.0	Complied

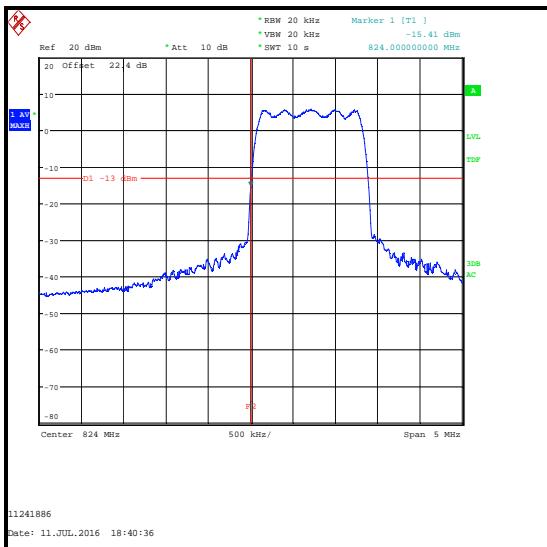


Lower band edge/Bottom channel

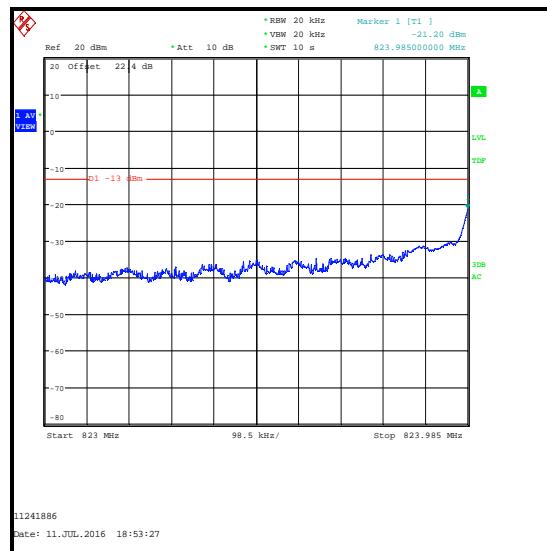Lower band edge/Bottom channel
Band edge to 15 kHz below band edge/channel powerLower band edge/Bottom channel
1 MHz below to 15 kHz below band edge


Transmitter Radiated Emissions at Band Edges (continued)**Results: EV-DO Rev. 0****Upper band edge/Top channel****Upper band edge/Top channel
Band edge to 15 kHz above band edge/channel power****Upper band edge/Top channel
15 kHz above band edge to 1 MHz above band edge**


Transmitter Radiated Emissions at Band Edges (continued)**Results: EV-DO Rev. A**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-18.6	-13.0	5.6	Complied
849	-14.6	-13.0	1.6	Complied

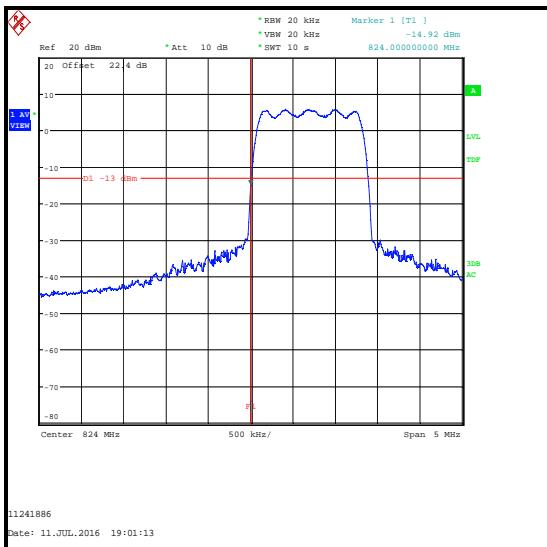

Lower band edge/Bottom channel

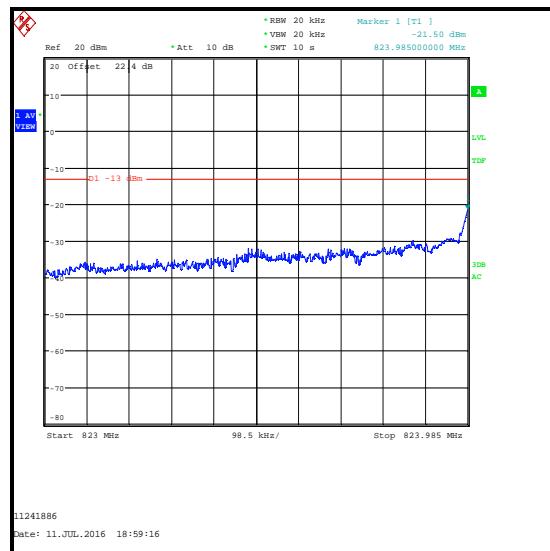Lower band edge/Bottom channel
Band edge to 15 kHz below band edge/channel powerLower band edge/Bottom channel
1 MHz below to 15 kHz below band edge

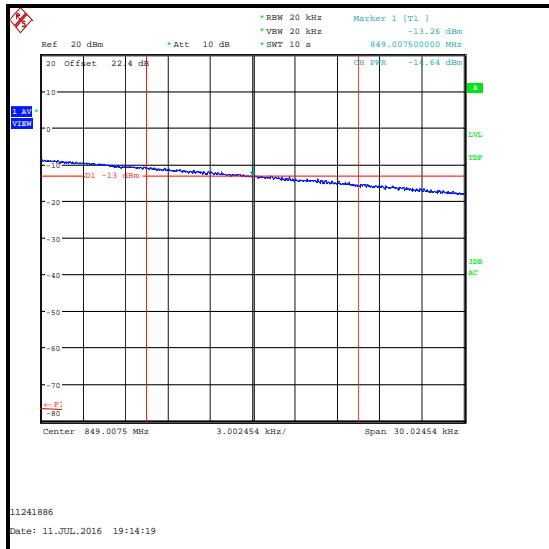Transmitter Radiated Emissions at Band Edges (continued)**Results: EV-DO Rev. A****Upper band edge/Top channel****Upper band edge/Top channel
Band edge to 15 kHz above band edge/channel power****Upper band edge/Top channel
15 kHz above band edge to 1 MHz above band edge**

Transmitter Radiated Emissions at Band Edges (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelpunkt	30.5015.13	None Stated	02 Apr 2017	12
K0017	3m RSE Chamber	Rainford	N/A	N/A	19 May 2016	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	21 Mar 2017	12
A2888	Antenna	Schwarzbeck	VULB 9163	9163-941	07 Apr 2017	12
A1936	Antenna	Schwarzbeck	UBAA 9114	9114-223	07 May 2016	36
M1020	Signal Generator	Rohde & Schwarz	SME03	834617/030	21 Dec 2016	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	30 Apr 2017	12

5.2.7. Transmitter Radiated Emissions at Band Edges - UAT**Test Summary:**

Test Engineer:	John Ferdinand	Test Dates:	23 June 2016 to 04 July 2016
Test Sample ESN:	8010C1F5		

FCC Reference:	Parts 2.1053 / 22.917
Test Method Used:	KDB 971168 D01 Section 6, Section 7 & notes below

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	38 to 43

Note(s):

1. Measurements were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. The measurement antenna was placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT.

Transmitter Radiated Emissions at Band Edges (continued)**Results: 1xRTT**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-24.6	-13.0	11.6	Complied
849	-18.3	-13.0	5.3	Complied




Transmitter Radiated Emissions at Band Edges (continued)**Results: EV-DO Rev. 0**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-23.2	-13.0	10.2	Complied
849	-18.8	-13.0	5.8	Complied



Transmitter Radiated Emissions at Band Edges (continued)**Results: EV-DO Rev. A**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-22.2	-13.0	9.2	Complied
849	-17.7	-13.0	4.7	Complied

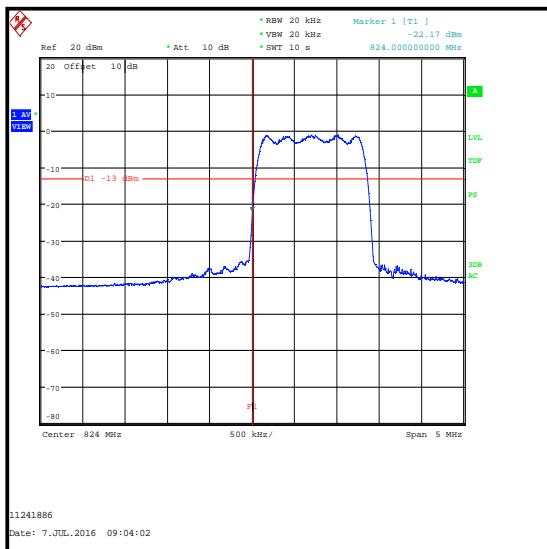**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspankt	30.5015.13	None Stated	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
A288	Antenna	Chase	CBL6111A	1589	27 Aug 2016	12
M1886	Test Receiver	Rohde and Schwarz	ESU26	100554	21 Mar 2017	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	30 Apr 2017	12

5.2.8. Transmitter Frequency Stability (Temperature Variation)

Test Summary:

Test Engineer:	Stefan Ho	Test Date:	28 June 2016
Test Sample ESN:	80BE0350		

FCC Reference:	Parts 2.1055 / 22.355
Test Method Used:	KDB 971168 D01 Section 9, FCC Part 2.1055 and notes below
Test Mode:	RC1/1 with Service Option 2


Environmental Conditions:

Ambient Temperature (°C):	20
Ambient Relative Humidity (%):	42

Note(s):

1. Flying leads were connected internally to the EUT in place of the battery. These leads were extended and connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer. Nominal voltage was monitored throughout the test with a calibrated digital voltmeter.

Test setup:

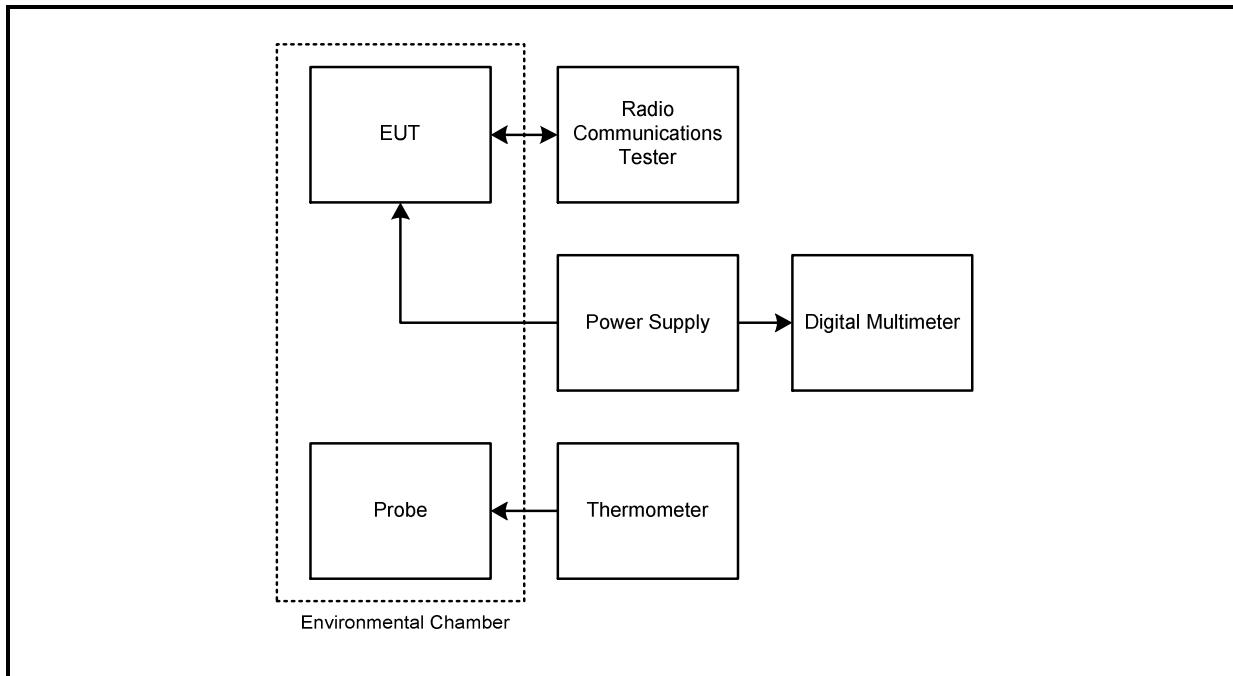

Transmitter Frequency Stability (Temperature Variation) (continued)**Results: Middle Channel (836.52 MHz)**

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	836.520005	5	0.0060	2.5	2.4940	Complied
-20	836.520007	7	0.0084	2.5	2.4916	Complied
-10	836.520008	8	0.0096	2.5	2.4904	Complied
0	836.520007	7	0.0084	2.5	2.4916	Complied
10	836.520006	6	0.0072	2.5	2.4928	Complied
20	836.520003	3	0.0036	2.5	2.4964	Complied
30	836.519996	4	0.0048	2.5	2.4952	Complied
40	836.519995	5	0.0060	2.5	2.4940	Complied
50	836.519992	8	0.0096	2.5	2.4904	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	02 Apr 2017	12
M1869	Radio Comms Tester	Rohde & Schwarz	CMW500	145923	05 Apr 2017	12
S0564	DC power supply	Thurlby Thandar	PL330P	062941	Calibrated before use	-
M1642	Thermometer	Fluke	52II	18890119	25 Apr 2017	12
M122	Multimeter	Fluke	77	64910017	21 Apr 2017	12
M1674	Environmental Chamber	Espec	SU-241	92013139	Calibrated before use	-

5.2.9. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

Test Engineer:	Stefan Ho	Test Date:	28 June 2016
Test Sample ESN:	80BE0350		

FCC Reference:	Parts 2.1055 & 22.355
Test Method Used:	FCC Part 2.1055 and notes below
Test Mode:	RC1/1 with Service Option 2

Environmental Conditions:

Temperature (°C):	20
Ambient Relative Humidity (%):	42

Note(s):

1. Flying leads were connected internally to the EUT in place of the battery. These leads were extended and connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

Results: Middle Channel (836.52 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.5	836.520003	3	0.0036	2.5	2.4964	Complied
4.4	836.520003	3	0.0036	2.5	2.4964	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	02 Apr 2017	12
M1869	Radio Comms Tester	Rohde & Schwarz	CMW500	145923	05 Apr 2017	12
S0564	DC power supply	Thurlby Thandar	PL330P	062941	Calibrated before use	-
M1642	Thermometer	Fluke	52II	18890119	25 Apr 2017	12
M122	Multimeter	Fluke	77	64910017	21 Apr 2017	12
M1674	Environmental Chamber	Espec	SU-241	92013139	Calibrated before use	-

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Output Power	824 to 849 MHz	95%	±1.13 dB
Occupied Bandwidth	824 to 849 MHz	95%	±3.92 %
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 9 GHz	95%	±2.94 dB
Frequency Stability	824 to 849 MHz	95%	±23 Hz

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	- 7 7 9 All 22 & 25	- - - - - -	At the request of the TCB: Inserted usage of sample Changed 'RFID' reference to 'NFC' Updated Section 4.2 Changed 'KDB 971168' references to 'KDB 971168 D01' Inserted Notes 3 & 5
3.0	- 9	- -	At the request of the TCB: Section 4.2. Inserted Bullet 3

--- END OF REPORT ---