



TEST REPORT

Test Report No. : UL-RPT-RP11241886JD07M V4.0

Manufacturer : Apple Inc.
Model No. : A1779
FCC ID : BCG-E3086A
Technology : UMTS Band II
Test Standard(s) : FCC Part 24 Subpart E

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 4.0 supersedes all previous versions.

Date of Issue: 03 August 2016

Checked by:

Ian Watch
Senior Engineer, Radio Laboratory

**Company
Signatory:**

Steven White
Service Lead, Radio Laboratory
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its terms
of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	8
4. Operation and Monitoring of the EUT during Testing	9
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
5. Measurements, Examinations and Derived Results.....	10
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter Output Power (EIRP) - LAT	11
5.2.2. Transmitter Output Power (EIRP) - UAT	16
5.2.3. Transmitter Occupied Bandwidth	21
5.2.4. Transmitter Out of Band Radiated Emissions - LAT	32
5.2.5. Transmitter Out of Band Radiated Emissions - UAT	37
5.2.6. Transmitter Band Edge Radiated Emissions - LAT	41
5.2.7. Transmitter Band Edge Radiated Emissions - UAT	52
5.2.8. Transmitter Frequency Stability (Temperature Variation)	63
5.2.9. Transmitter Frequency Stability (Voltage Variation)	66
6. Measurement Uncertainty	68
7. Report Revision History	69

1. Customer Information

Company Name:	Apple Inc.
Address:	1 Infinite Loop Cupertino, CA 95014 U.S.A

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR24
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 24 Subpart E (Personal Communication Services)
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	07 May 2016 to 12 July 2016

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 24.232(c)	Transmitter Output Power (EIRP)	✓
Part 2.1049	Transmitter Occupied Bandwidth	✓
Part 2.1053/24.238	Transmitter Out of Band Radiated Emissions	✓
Part 2.1053/24.238	Transmitter Band Edge Radiated Emissions	✓
Part 2.1055/24.235	Transmitter Frequency Stability (Temperature and Voltage Variation)	✓
Key to Results		
✓ = Complied	✗ = Did not comply	

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-D-2010
Title:	Land Mobile FM or PM Communications Equipment Measurements and performance Standards
Title:	FCC KDB 971168 D01 v02r02, October 17 2014
Reference:	Measurement Guidance for Certification of Licensed Digital Transmitters

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample IMEI:	358640070022893 (<i>Radiated sample #1</i>)
Hardware Version:	REV1.0
Software Version:	iOS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample IMEI:	358640070087482 (<i>Radiated sample #2</i>)
Hardware Version:	REV1.0
Software Version:	iOS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample IMEI:	358640070066221 (<i>Conducted sample #1</i>)
Hardware Version:	REV1.0
Software Version:	iOS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample Serial Number:	C7CRG02QH6DH (<i>Conducted Sample #2</i>)
Hardware Version:	REV1.0
Software Version:	iOS: 14A241z BB FW: 0.16.04
FCC ID:	BCG-E3086A

3.2. Description of EUT

The Equipment Under Test was a mobile phone with GSM/GPRS/EGPRS/UMTS/LTE/TD-SCDMA and CDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The rechargeable battery is not user accessible.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	UMTS1900		
Type of Radio Device:	Transceiver		
Mode:	UMTS FDD II		
Modulation Type:	QPSK / 8PSK		
Channel Spacing:	5 MHz		
Power Supply Requirement(s):	Nominal	3.8 VDC	
	Minimum	3.5 VDC	
	Maximum	4.4 VDC	
Transmit Frequency Range:	1850 to 1910 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	9262	1852.4
	Middle	9400	1880.0
	Top	9538	1907.6

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop PC
Brand Name:	Dell
Model Name or Number:	Latitude E5410
Serial Number:	UL Asset No. 00763

Description:	USB diagnostic cable
Brand Name:	Not stated
Model Name or Number:	Kong
Serial Number:	202D5E

Description:	Personal Hands Free (PHF)
Brand Name:	Apple
Model Name or Number:	Apple Ear Plugs
Serial Number:	Not stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Constantly transmitting at full power on bottom, middle and top channels as required.
- Occupied bandwidth, EIRP and band edge tests were performed with the EUT in RMC (12.2 kbps), HSDPA (Sub-tests 1 to 4) or HSUPA (Sub-tests 1 to 5) modes.
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. HSUPA Sub-Test 3 was found to be the worst case and all final measurements were performed with the EUT in this mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT was placed into a non-ui mode by using the teraterm application on a UL laptop PC. Instructions were provided by the customer to enable the baseband and radio (*Cellular_RSE_setup_V3.0.doc*). This enabled the EUT to connect via a radiated link with the Rohde & Schwarz CMW 500 system simulator operating in transceiver mode. The CMW 500 was used to configure the EUT operating mode.
- Transmitter radiated spurious emissions tests were performed with the PHF connected to the EUT as the declared by the customer. The EUT was placed in three orthogonal orientations X, Y and Z to determine the worst case orientation for radiated spurious emissions. The worst case orientation for the LAT was X and for the UAT was X. Measurements at band edges were performed with the PHF removed as this was found to be the worst case.
- The worst-case radiated emission among all accessories, is determined by the manufacturer to be with the headset connected. The compliance lab performed final testing only with the headset attached.
- The device contains two cellular antennas which do not transmit simultaneously.
 - LAT – Lower Antenna (Primary)
 - UAT – Upper Antenna (Secondary)

Both antennas have been tested to demonstrate compliance.

- For the LAT conducted measurements, the RF conducted port was connected with an external RF cable, supplied by the customer.
- For the UAT conducted cellular measurements, the RF conducted port was exposed and extended with a short RF cable supplied by the customer.
- Conducted measurements at temperature and voltage extremes were performed using a conducted sample supplied by the customer. Short DC flying leads were connected internally to the device in place of the battery, and exited through a hole in the casing. These leads were then extended to a DC power supply for testing purposes.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Output Power (EIRP) - LAT

Test Summary:

Test Engineer:	David Doyle	Test Date:	12 July 2016
Test Sample IMEI:	358640070066221		

FCC Reference:	Part 24.232(c)
Test Method Used:	KDB 971168 D01 Section 5.1.1 and 5.2.1


Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	41

Note(s):

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.
2. The signal analyser was connected to the RF port on the EUT via the coupled port on an RF combiner using suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the combiner, attenuators and RF cables. The through port on the RF coupler was connected to an R&S CMW 500 Radio Communications Tester.
3. The EUT was transmitting at maximum power on a single channel.
4. The customer stated a maximum antenna gain of -2.25 dBi.
5. The antenna gain was added to the conducted output power to obtain the EIRP.

Test setup:

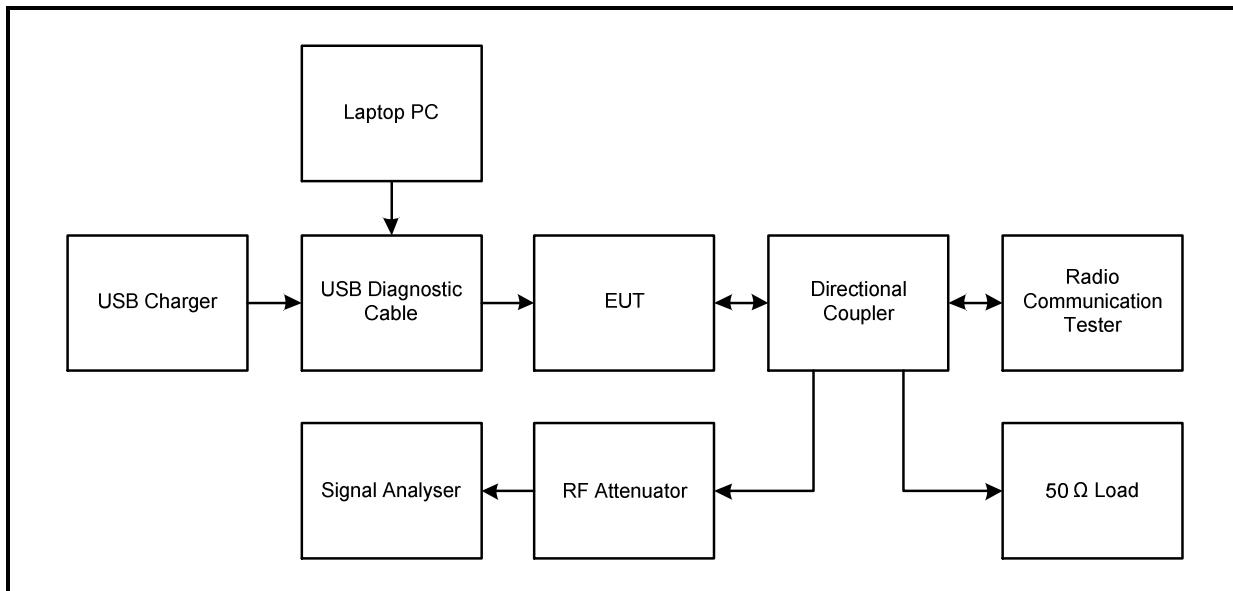

Transmitter Output Power (EIRP) (continued)**Results: Peak EIRP / HSDPA and RMC**

Modes		HSDPA				RMC			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	25.8	27.0	27.0	27.0	26.8	33.0	6.0	Complied
	9400	26.1	27.2	27.4	27.2	26.9	33.0	5.6	Complied
	9538	26.0	27.0	26.9	26.9	26.7	33.0	6.0	Complied
β_c		2	11	15	15				
β_d		15	15	8	4				
Δ ACK, Δ NACK, Δ CQI		8	8	8	8				

Results: Peak EIRP / HSUPA

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	27.0	26.8	27.1	25.8	27.0	33.0	5.9	Complied
	9400	27.3	27.0	27.4	26.0	27.2	33.0	5.6	Complied
	9538	26.9	26.8	26.9	25.8	26.9	33.0	6.1	Complied
β_c		11	6	15	2	15			
β_d		15	15	9	15	1			
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	8			

Transmitter Output Power (EIRP) (continued)**Results: RMS EIRP / HSDPA and RMC**

Modes		HSDPA				RMC			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	20.2	18.4	17.5	17.2	21.6	33.0	11.4	Complied
	9400	20.5	18.6	17.6	17.3	21.6	33.0	11.4	Complied
	9538	20.4	18.7	17.5	16.8	21.6	33.0	11.4	Complied
β_c		2	11	15	15				
β_d		15	15	8	4				
Δ ACK, Δ NACK, Δ CQI		8	8	8	8				

Results: RMS EIRP / HSUPA

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	20.4	19.5	20.5	20.4	20.0	33.0	12.5	Complied
	9400	20.5	19.5	20.6	20.5	20.2	33.0	12.4	Complied
	9538	19.4	19.9	20.5	20.4	20.1	33.0	12.5	Complied
β_c		11	6	15	2	15			
β_d		15	15	9	15	1			
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	8			

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2002	Thermohygrometer	JM Handelpunkt	30.5015.134	Not stated	02 Apr 2017	12
A2503	Directional Coupler	AtlanTecRF	CDC-003060-10	13122501838	Calibrated before use	-
A2527	Attenuator	AtlanTecRF	AN18W5-20	832828#2	Calibrated before use	-
M1996	Signal Analyser	Rohde & Schwarz	FSV13	100975	02 Mar 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24
M1021	Signal Generator	Rohde & Schwarz	SMP02	833286/004	19 May 2017	12

Transmitter Output Power (EIRP) - LAT**Test Summary:**

Test Engineer:	David Doyle	Test Date:	12 July 2016
Test Sample IMEI:	358640070066221		

FCC Reference:	Part 24.232(c)
Test Method Used:	KDB 971168 D01 Section 5.1.1 and 5.2.1

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	41

Note(s):

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.
2. The signal analyser was connected to the RF port on the EUT via the coupled port on an RF combiner using suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the combiner, attenuators and RF cables. The through port on the RF coupler was connected to an R&S CMW 500 Radio Communications Tester.
3. The EUT was transmitting at maximum power in Dual Carrier HSDPA mode.
4. The customer stated a maximum antenna gain of -2.25 dBi.
5. The antenna gain was added to the conducted output power to obtain the EIRP.

Transmitter Dual Carrier Output Power (EIRP) (continued)**Results: Peak EIRP / Dual Carrier HSDPA**

Modes		HSDPA				
Sub-test		1	2	3	4	
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)
850	9262	25.8	27.0	27.0	27.0	33.0
	9400	26.1	27.2	27.2	27.2	33.0
	9538	26.0	26.9	26.9	26.9	33.0
β_c		2	11	15	15	
β_d		15	15	8	4	
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	

Results: RMS EIRP / Dual Carrier HSDPA

Modes		HSDPA				
Sub-test		1	2	3	4	
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)
850	9262	20.3	18.4	17.3	17.1	33.0
	9400	20.5	18.8	17.5	17.3	33.0
	9538	20.3	18.5	17.6	17.1	33.0
β_c		2	11	15	15	
β_d		15	15	8	4	
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2002	Thermohygrometer	JM Handelpunkt	30.5015.134	Not stated	02 Apr 2017	12
A2503	Directional Coupler	AtlanTecRF	CDC-003060-10	13122501838	Calibrated before use	-
A2527	Attenuator	AtlanTecRF	AN18W5-20	832828#2	Calibrated before use	-
M1996	Signal Analyser	Rohde & Schwarz	FSV13	100975	02 Mar 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24
M1021	Signal Generator	Rohde & Schwarz	SMP02	833286/004	19 May 2017	12

5.2.2. Transmitter Output Power (EIRP) - UAT**Test Summary:**

Test Engineer:	David Doyle	Test Date:	11 July 2016
Test Sample IMEI:	358640070066221		

FCC Reference:	Part 24.232(c)
Test Method Used:	KDB 971168 D01 Section 5.1.1 and 5.2.1

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	42

Note(s):

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.
2. The signal analyser was connected to the RF port on the EUT via the coupled port on an RF combiner using suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the combiner, attenuators and RF cables. The through port on the RF coupler was connected to an R&S CMW 500 Radio Communications Tester.
3. The EUT was transmitting at maximum power on a single channel.
4. The customer stated a maximum antenna gain of 0.35 dBi.
5. The antenna gain was added to the conducted output power to obtain the EIRP.

Transmitter Output Power (EIRP) (continued)**Results: Peak EIRP / HSDPA and RMC**

Modes		HSDPA				RMC			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	25.2	26.0	25.9	25.9	25.7	33.0	7.0	Complied
	9400	25.4	26.3	26.3	26.3	26.2	33.0	6.7	Complied
	9538	24.9	25.6	25.5	25.5	25.3	33.0	7.4	Complied
β_c		2	11	15	15				
β_d		15	15	8	4				
Δ ACK, Δ NACK, Δ CQI		8	8	8	8				

Results: Peak EIRP / HSUPA

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	26.0	25.9	26.1	25.1	26.0	33.0	7.0	Complied
	9400	26.2	26.4	26.4	25.5	26.4	33.0	6.6	Complied
	9538	25.5	25.4	25.6	24.9	25.6	33.0	7.4	Complied
β_c		11	6	15	2	15			
β_d		15	15	9	15	1			
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	8			

Transmitter Output Power (EIRP) (continued)**Results: RMS EIRP / HSDPA and RMC**

Modes		HSDPA				RMC			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	19.6	17.4	16.6	16.4	20.6	33.0	12.4	Complied
	9400	19.7	17.8	16.8	16.7	20.7	33.0	12.3	Complied
	9538	19.4	17.8	16.8	16.4	20.5	33.0	12.6	Complied
β_c		2	11	15	15				
β_d		15	15	8	4				
Δ ACK, Δ NACK, Δ CQI		8	8	8	8				

Results: RMS EIRP / HSUPA

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result				
1900	9262	19.6	18.6	19.6	19.6	19.1	33.0	13.4	Complied
	9400	19.7	19.2	19.8	19.8	19.2	33.0	13.2	Complied
	9538	19.6	18.4	19.4	19.5	19.1	33.0	13.5	Complied
β_c		11	6	15	2	15			
β_d		15	15	9	15	1			
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	8			

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2002	Thermohygrometer	JM Handelpunkt	30.5015.134	Not stated	02 Apr 2017	12
A2503	Directional Coupler	AtlanTecRF	CDC-003060-10	13122501838	Calibrated before use	-
A2527	Attenuator	AtlanTecRF	AN18W5-20	832828#2	Calibrated before use	-
M1996	Signal Analyser	Rohde & Schwarz	FSV13	100975	02 Mar 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24
M1021	Signal Generator	Rohde & Schwarz	SMP02	833286/004	19 May 2017	12

Transmitter Output Power (EIRP) - UAT**Test Summary:**

Test Engineer:	David Doyle	Test Date:	11 July 2016
Test Sample IMEI:	358640070066221		

FCC Reference:	Part 24.232(c)
Test Method Used:	KDB 971168 D01 Section 5.1.1 and 5.2.1

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	42

Note(s):

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.
2. The signal analyser was connected to the RF port on the EUT via the coupled port on an RF combiner using suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the combiner, attenuators and RF cables. The through port on the RF coupler was connected to an R&S CMW 500 Radio Communications Tester.
3. The EUT was transmitting at maximum power in Dual Carrier HSDPA mode.
4. The customer stated a maximum antenna gain of 0.35 dBi.
5. The antenna gain was added to the conducted output power to obtain the EIRP.

Transmitter Output Power (EIRP) (continued)**Results: Peak EIRP / Dual Carrier HSDPA**

Modes		HSDPA						
Sub-test		1	2	3	4			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
1900	9262	25.0	25.9	25.9	25.9	33.0	7.1	Complied
	9400	25.1	26.2	26.3	26.2	33.0	6.7	Complied
	9538	24.8	25.6	25.4	25.5	33.0	7.5	Complied
β_c		2	11	15	15			
β_d		15	15	8	4			
Δ ACK, Δ NACK, Δ CQI		8	8	8	8			

Results: RMS EIRP / Dual Carrier HSDPA

Modes		HSDPA						
Sub-test		1	2	3	4			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
1900	9262	19.5	17.5	16.6	16.4	33.0	13.5	Complied
	9400	19.6	17.8	16.7	16.5	33.0	13.4	Complied
	9538	19.4	17.6	16.6	16.2	33.0	13.6	Complied
β_c		2	11	15	15			
β_d		15	15	8	4			
Δ ACK, Δ NACK, Δ CQI		8	8	8	8			

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2002	Thermohygrometer	JM Handelpunkt	30.5015.134	Not stated	02 Apr 2017	12
A2503	Directional Coupler	AtlanTecRF	CDC-003060-10	13122501838	Calibrated before use	-
A2527	Attenuator	AtlanTecRF	AN18W5-20	832828#2	Calibrated before use	-
M1996	Signal Analyser	Rohde & Schwarz	FSV13	100975	02 Mar 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24
M1021	Signal Generator	Rohde & Schwarz	SMP02	833286/004	19 May 2017	12

5.2.3. Transmitter Occupied Bandwidth

Test Summary:

Test Engineer:	David Doyle	Test Dates:	21 June 2016 & 30 June 2016
Test Sample IMEI:	358640070066221		

FCC Reference:	Part 2.1049
Test Method Used:	KDB 971168 D01 Section 4.2


Environmental Conditions:

Temperature (°C):	24 to 25
Relative Humidity (%):	38 to 39

Note(s):

1. Occupied bandwidth (99% bandwidth) was measured using a signal analyser occupied bandwidth function.
2. The signal analyser was connected to the RF port on the EUT via the coupled port on an RF coupler using suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the coupler, attenuators and RF cables. The through port on the RF coupler was connected to an R&S CMW 500 Radio Communications Tester.

Test setup:

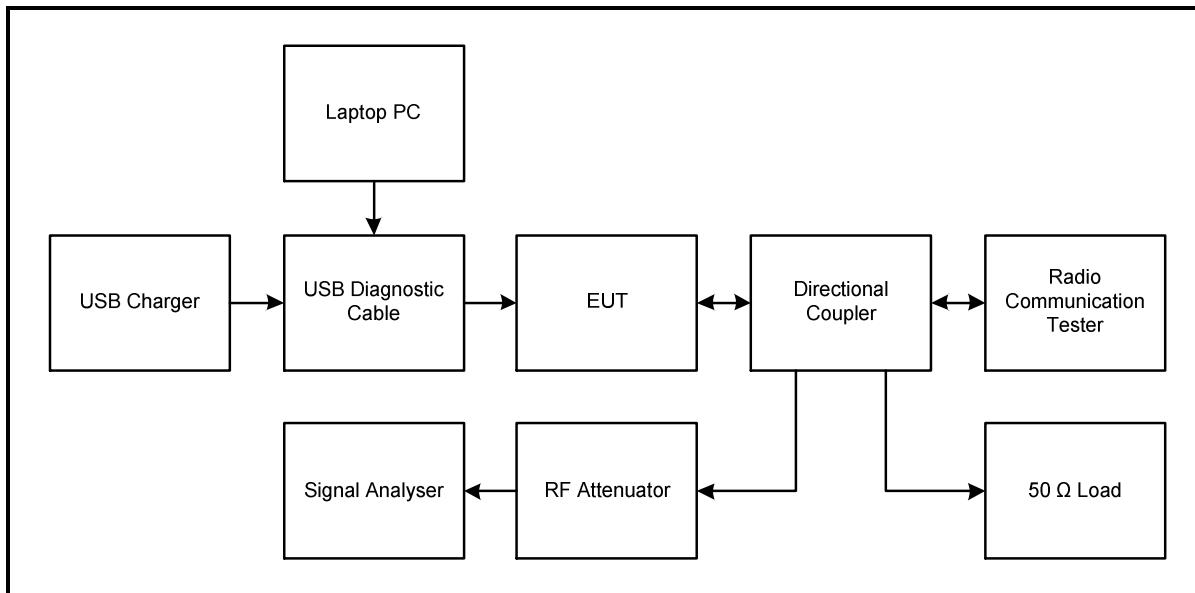

Transmitter Occupied Bandwidth (continued)**Results: RMC / 12.2 kbps**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4138.929

**Middle Channel**


Transmitter Occupied Bandwidth (continued)**Results: HSDPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4138.929

**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSDPA Sub-Test 2**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4153.401

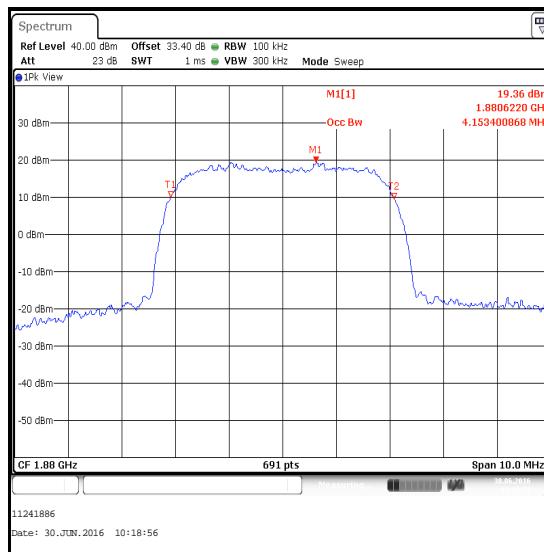**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSDPA Sub-Test 3**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4153.401

**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSDPA Sub-Test 4**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4167.873

**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSUPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4153.401

**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSUPA Sub-Test 2**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4153.401

**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSUPA Sub-Test 3**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4167.873

**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSUPA Sub-Test 4**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4153.401

**Middle Channel**

Transmitter Occupied Bandwidth (continued)**Results: HSUPA Sub-Test 5**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1880.0	4138.929

**Middle Channel****Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2002	Thermohygrometer	JM Handelpunkt	30.5015.134	Not stated	02 Apr 2017	12
A2503	Directional Coupler	AtlanTecRF	CDC-003060-10	13122501838	Calibrated before use	-
A2527	Attenuator	AtlanTecRF	AN18W5-20	832828#2	Calibrated before use	-
M1996	Signal Analyser	Rohde & Schwarz	FSV13	100975	02 Mar 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24
M1021	Signal Generator	Rohde & Schwarz	SMP02	833286/004	19 May 2017	12

5.2.4. Transmitter Out of Band Radiated Emissions - LAT**Test Summary:**

Test Engineers:	Nick Steele & Andrew Edwards	Test Dates:	07 May 2016 & 10 June 2016
Test Sample IMEI:	358640070087482		


FCC Reference:	Parts 2.1053 & 24.238
Test Method Used:	KDB 971168 D01 Section 6.1 referencing FCC Part 2.1053
Frequency Range:	30 MHz to 20 GHz
Configuration:	Voice / 12.2 kbps

Environmental Conditions:

Temperature (°C):	25 to 26
Relative Humidity (%):	30 to 44




Note(s):

1. The uplink traffic channel is shown on the 1 GHz to 3 GHz plot.
2. No spurious emissions were detected above the noise floor of the measuring receiver, the highest peak noise floor reading of the measuring receiver was recorded.
3. Middle channel results are recorded in this report and are representative of bottom and top channel results which are held on the UL IT server and available for inspection on request.
4. Measurements were performed in a semi-anechoic/fully anechoic chamber (Asset Number K0002/K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres. A peak detector and trace mode of Max Hold were used to perform pre-scans, with markers placed on the highest measured levels.
5. Radiated spurious emission testing between 150 kHz and 30 MHz was performed for support of the NFC test report. No spurious emissions were observed above the noise floor of the measurement system.




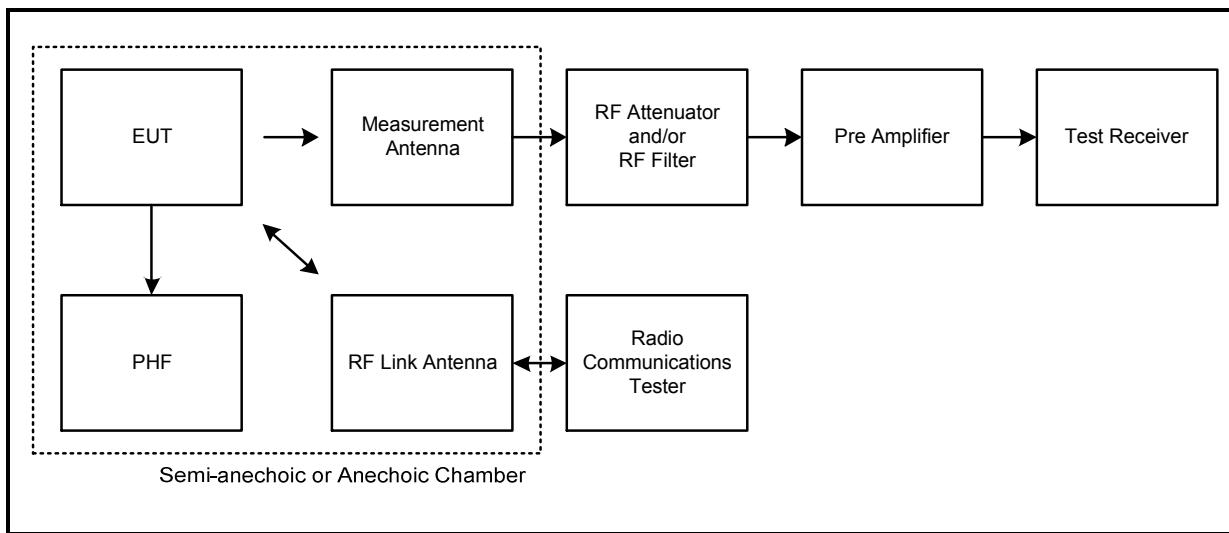
Transmitter Out of Band Radiated Emissions (continued)**Test setup for radiated measurements:****Results: Voice / 12.2 kbps - Middle Channel**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
18000.000	-37.2	-13.0	24.2	Complied

Transmitter Out of Band Radiated Emissions (continued)

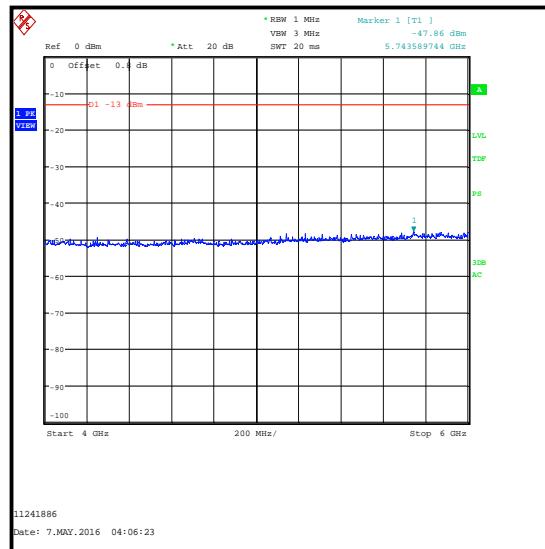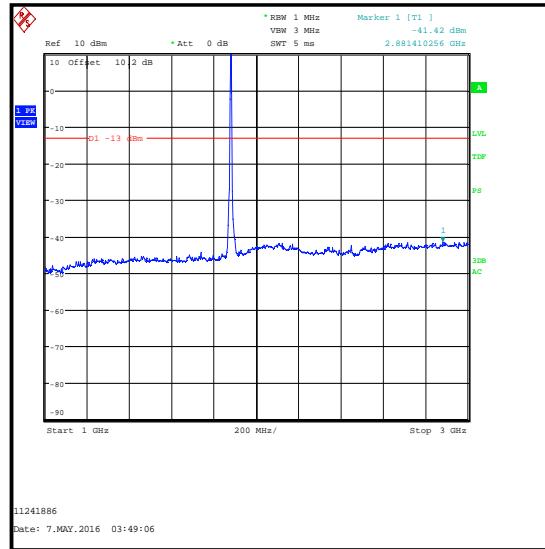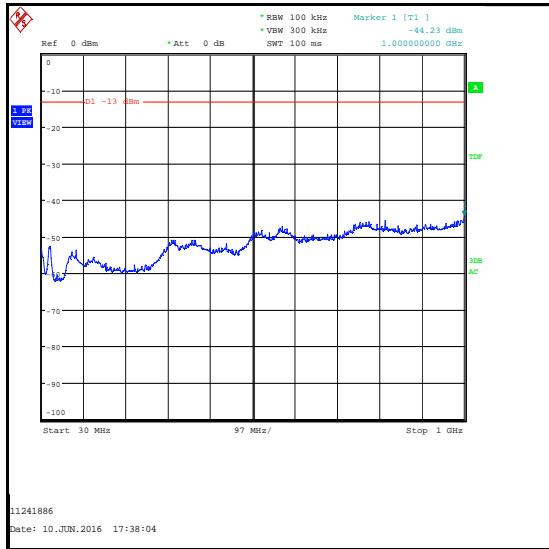

Transmitter Out of Band Radiated Emissions (continued)

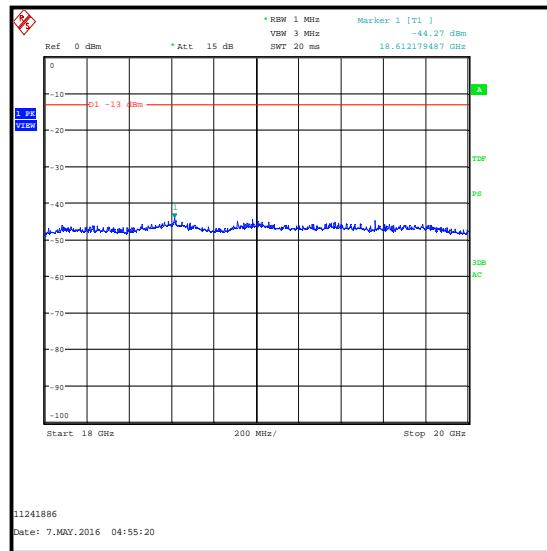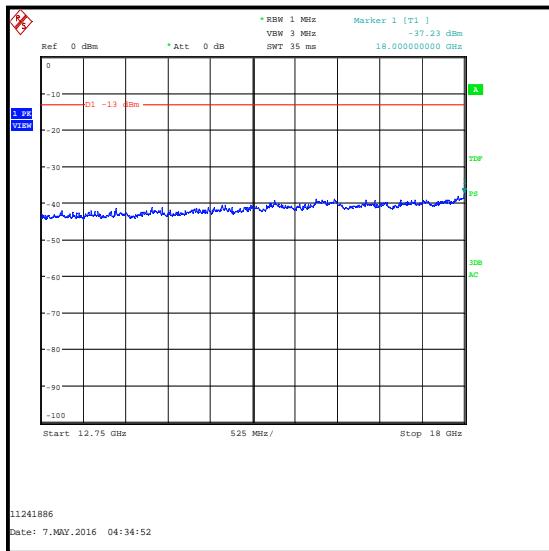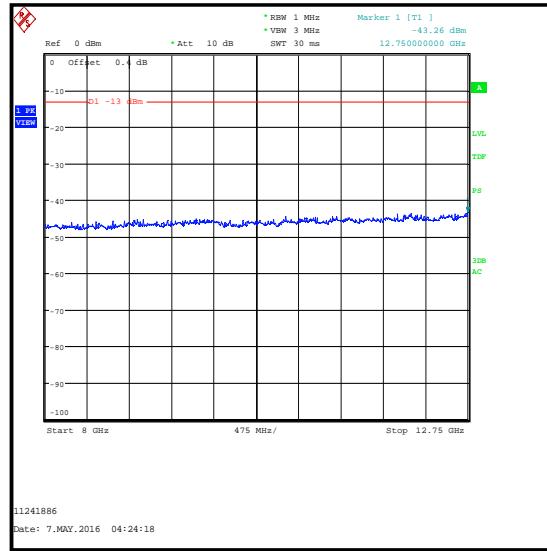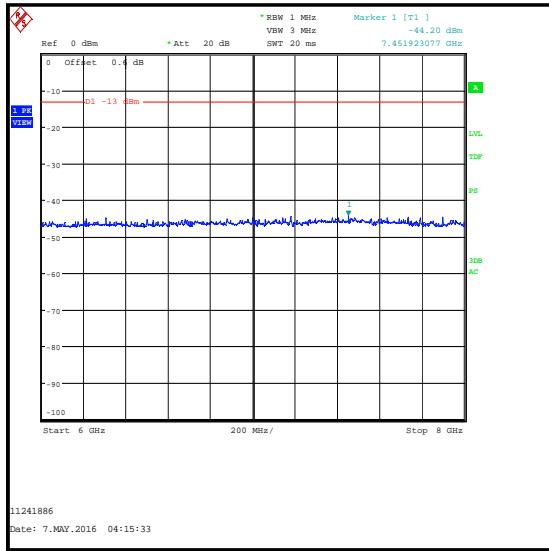

Transmitter Out of Band Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelpunkt	30.5015.13	None stated	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	21 Mar 2017	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#1	19 May 2017	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	26 Apr 2017	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	19 Dec 2016	12
A1818	Antenna	EMCO	3115	00075692	17 Dec 2016	12
A253	Antenna	Flann Microwave	12240-20	128	17 Dec 2016	12
A254	Antenna	Flann Microwave	14240-20	139	17 Dec 2016	12
A255	Antenna	Flann Microwave	16240-20	519	17 Dec 2016	12
A256	Antenna	Flann Microwave	18240-20	400	17 Dec 2016	12
A436	Antenna	Flann Microwave	20240-20	330	17 Dec 2016	12
M2003	Thermohygrometer	Testo	608-H1	45046641	22 Apr 2017	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	17 May 2017	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	21 Mar 2017	12
A2888	Antenna	Schwarzbeck	VULB 9163	9163-941	07 Apr 2017	12

5.2.5. Transmitter Out of Band Radiated Emissions - UAT**Test Summary:**

Test Engineers:	Nick Steele & Andrew Edwards	Test Dates:	07 May 2016 & 10 June 2016
Test Sample IMEI:	358640070022893		

FCC Reference:	Parts 2.1053 & 24.238
Test Method Used:	KDB 971168 D01 Section 6.1
Frequency Range:	30 MHz to 20 GHz
Configuration:	Voice / 12.2 kbps

Environmental Conditions:





Temperature (°C):	24 to 26
Relative Humidity (%):	30 to 36

Note(s):





1. The uplink traffic channel is shown on the 1 GHz to 3 GHz plot.
2. No spurious emissions were detected above the noise floor of the measuring receiver, the highest peak noise floor reading of the measuring receiver was recorded.
3. Middle channel results are recorded in this report and are representative of bottom and top channel results which are held on the UL IT server and available for inspection on request.
4. Measurements were performed in a semi-anechoic/fully anechoic chamber (Asset Number K0002/K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres. A peak detector and trace mode of Max Hold were used to perform pre-scans, with markers placed on the highest measured levels.
5. Radiated spurious emission testing between 150 kHz and 30 MHz was performed for support of the NFC test report. No spurious emissions were observed above the noise floor of the measurement system.

Transmitter Out of Band Radiated Emissions (continued)**Results: Voice / 12.2 kbps – Middle Channel**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
18000.000	-37.8	-13.0	24.8	Complied

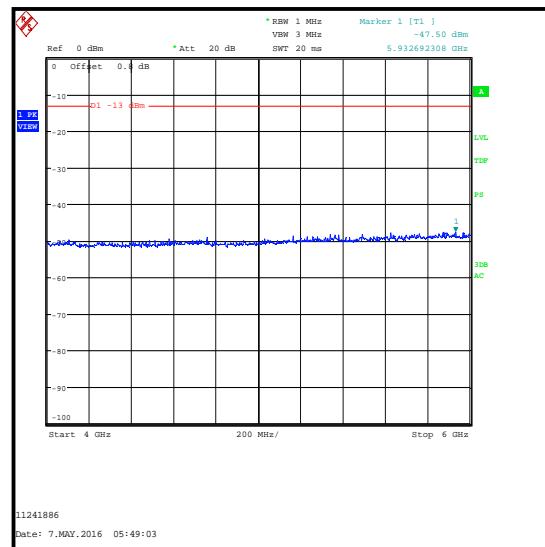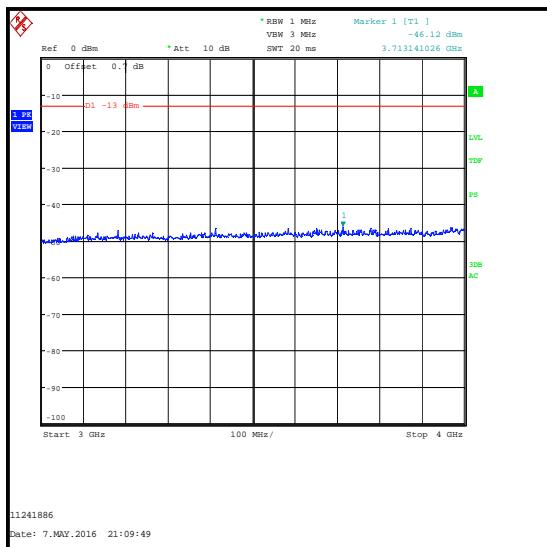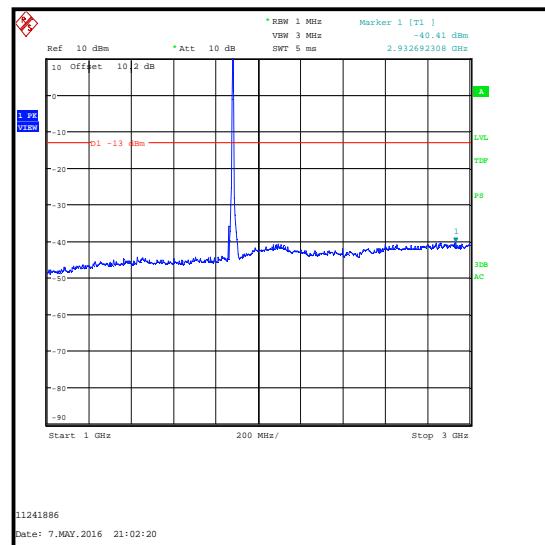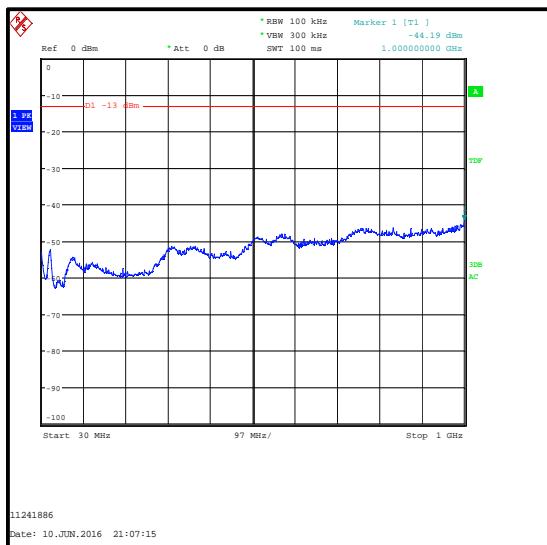

Transmitter Out of Band Radiated Emissions (continued)

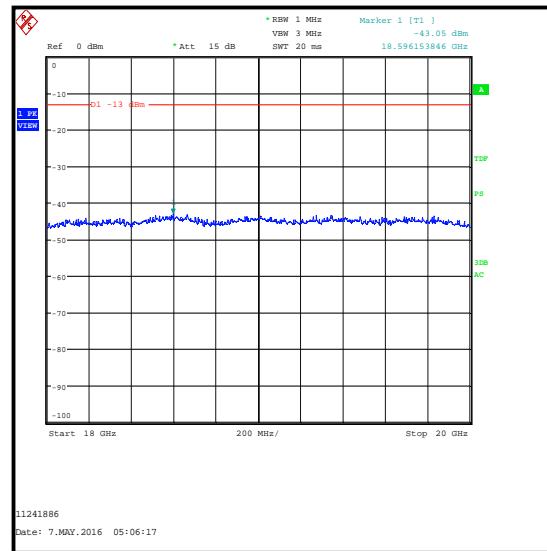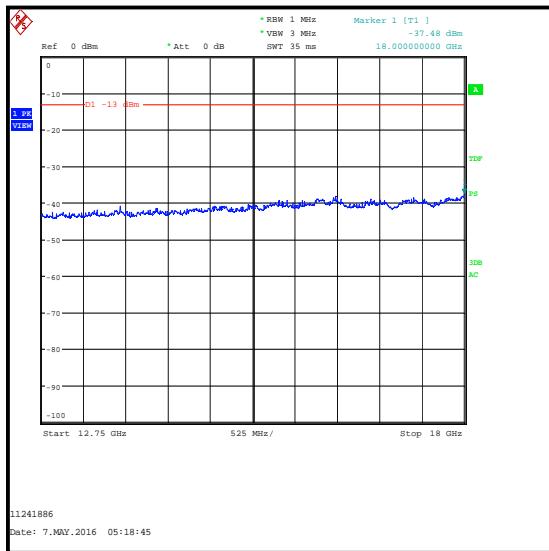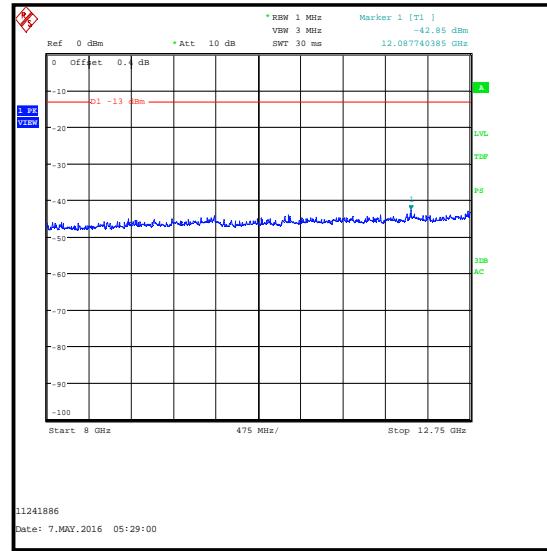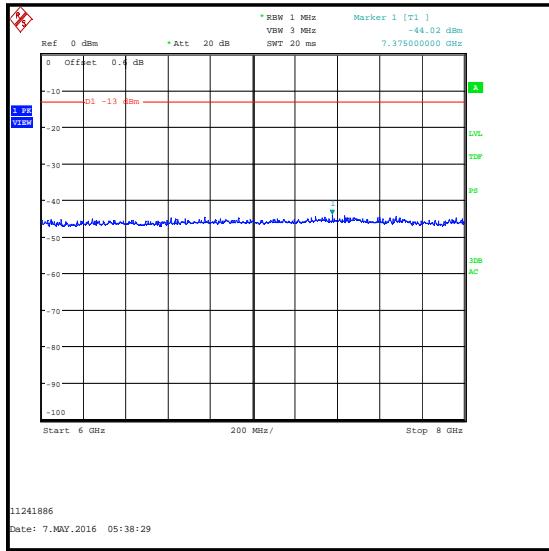

Transmitter Out of Band Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelpunkt	30.5015.13	None stated	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	21 Mar 2017	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#1	19 May 2017	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	26 Apr 2017	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	19 Dec 2016	12
A1818	Antenna	EMCO	3115	00075692	17 Dec 2016	12
A253	Antenna	Flann Microwave	12240-20	128	17 Dec 2016	12
A254	Antenna	Flann Microwave	14240-20	139	17 Dec 2016	12
A255	Antenna	Flann Microwave	16240-20	519	17 Dec 2016	12
A256	Antenna	Flann Microwave	18240-20	400	17 Dec 2016	12
A436	Antenna	Flann Microwave	20240-20	330	17 Dec 2016	12
M2003	Thermohygrometer	Testo	608-H1	45046641	22 Apr 2017	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	17 May 2017	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	21 Mar 2017	12
A2888	Antenna	Schwarzbeck	VULB 9163	9163-941	07 Apr 2017	12

5.2.6. Transmitter Band Edge Radiated Emissions - LAT**Test Summary:**

Test Engineer:	David Doyle	Test Date:	05 July 2016
Test Sample IMEI:	358640070087482		

FCC Reference:	Parts 2.1053 & 24.238
Test Method Used:	KDB 971168 D01 Section 6.1 referencing FCC Part 24.238

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	39

Note(s):

1. Measurements were performed with the EUT transmitting in all operating modes.
2. Measurements were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. The measurement antenna was placed at a fixed height of 1.5 metres above the test chamber floor in line with the EUT.
3. In the first 1.0 MHz immediately outside and adjacent to the band, the test receiver resolution bandwidth was set to approximately 1% of the occupied bandwidth and video bandwidth 3%. Sweep time was set to 10 seconds and an average detector with maximum hold was used.

Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: RMC / 12.2 kbps**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1849.840	-27.5	-13.0	14.5	Complied
1850	-28.8	-13.0	15.8	Complied
1910	-28.6	-13.0	15.6	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: HSDPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1849.833	-29.2	-13.0	16.2	Complied
1850	-30.0	-13.0	17.0	Complied
1910	-30.3	-13.0	17.3	Complied
1910.147	-29.9	-13.0	16.9	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: HSDPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-29.8	-13.0	16.8	Complied
1910	-31.0	-13.0	19.0	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: HSDPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-30.6	-13.0	17.6	Complied
1910	-31.7	-13.0	18.7	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: HSDPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-30.4	-13.0	17.4	Complied
1910	-31.7	-13.0	18.7	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: HSUPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-28.6	-13.0	15.6	Complied
1910	-29.7	-13.0	16.7	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT

Results: HSUPA Sub-Test 2

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-28.5	-13.0	15.5	Complied
1910	-29.9	-13.0	16.9	Complied



Transmitter Band Edge Radiated Emissions (continued) – LAT**Results: HSUPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-28.7	-13.0	15.7	Complied
1910	-30.1	-13.0	17.1	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: HSUPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-28.2	-13.0	15.2	Complied
1910	-30.1	-13.0	17.1	Complied
1910.141	-29.8	-13.0	16.8	Complied



Transmitter Band Edge Radiated Emissions (continued) - LAT**Results: HSUPA Sub-Test 5**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-29.0	-13.0	16.0	Complied
1910	-29.7	-13.0	16.7	Complied

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	22 Apr 2017	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	17 May 2017	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	21 Mar 2017	12
A2888	Antenna	Schwarzbeck	VULB 9163	9163-941	07 Apr 2017	12
A2926	Attenuator	AtlanTecRF	AN18W5-30	85850#2	19 May 2017	12

5.2.7. Transmitter Band Edge Radiated Emissions - UAT**Test Summary:**

Test Engineer:	David Doyle	Test Date:	05 July 2016
Test Sample IMEI:	358640070022893		

FCC Reference:	Parts 2.1053 & 24.238
Test Method Used:	KDB 971168 D01 Section 6.1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	40

Note(s):

1. Measurements were performed with the EUT transmitting in all operating modes.
2. Measurements were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. The measurement antenna was placed at a fixed height of 1.5 metres above the test chamber floor in line with the EUT.
3. In the first 1.0 MHz immediately outside and adjacent to the band, the test receiver resolution bandwidth was set to approximately 1% of the occupied bandwidth and video bandwidth 3%. Sweep time was set to 10 seconds and an average detector with maximum hold was used.

Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: RMC / 12.2 kbps**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-28.3	-13.0	15.3	Complied
1910	-29.3	-13.0	16.3	Complied
1910.147	-29.2	-13.0	16.2	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: HSDPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-29.2	-13.0	16.2	Complied
1910	-30.5	-13.0	17.5	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: HSDPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-29.4	-13.0	16.4	Complied
1910	-31.2	-13.0	18.2	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: HSDPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-30.6	-13.0	17.6	Complied
1910	-32.3	-13.0	19.3	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: HSDPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-30.7	-13.0	17.7	Complied
1910	-32.4	-13.0	19.4	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT

Results: HSUPA Sub-Test 1

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-29.7	-13.0	16.7	Complied
1910	-30.3	-13.0	17.3	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: HSUPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-29.1	-13.0	16.1	Complied
1910	-29.0	-13.0	16.0	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: HSUPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-28.3	-13.0	15.3	Complied
1910	-29.4	-13.0	16.4	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT**Results: HSUPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-29.1	-13.0	16.1	Complied
1910	-30.1	-13.0	17.1	Complied



Transmitter Band Edge Radiated Emissions (continued) - UAT

Results: HSUPA Sub-Test 5

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-28.9	-13.0	15.9	Complied
1910	-29.9	-13.0	16.9	Complied



Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	22 Apr 2017	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	17 May 2017	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	21 Mar 2017	12
A2888	Antenna	Schwarzbeck	VULB 9163	9163-941	07 Apr 2017	12
A2926	Attenuator	AtlanTecRF	AN18W5-30	85850#2	19 May 2017	12

5.2.8. Transmitter Frequency Stability (Temperature Variation)**Test Summary:**

Test Engineer:	Stefan Ho	Test Date:	11 May 2016
Test Sample Serial Number:	C7CRG02QH6DH		


FCC Reference:	Parts 2.1055 & 24.235
Test Method Used:	KDB 971168 D01 Section 9.0 / ANSI/TIA-603-D-2010 Section 2.2.2 and FCC Part 2.1055
Test Mode:	RMC

Environmental Conditions:

Ambient Temperature (°C):	23
Ambient Relative Humidity (%):	40

Note(s):

1. Flying leads were connected internally to the EUT in place of the battery. These leads were extended and connected to a bench power supply at the nominal voltage of 3.8 V.
2. Frequency error was measured using a calibrated Rohde and Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde and Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

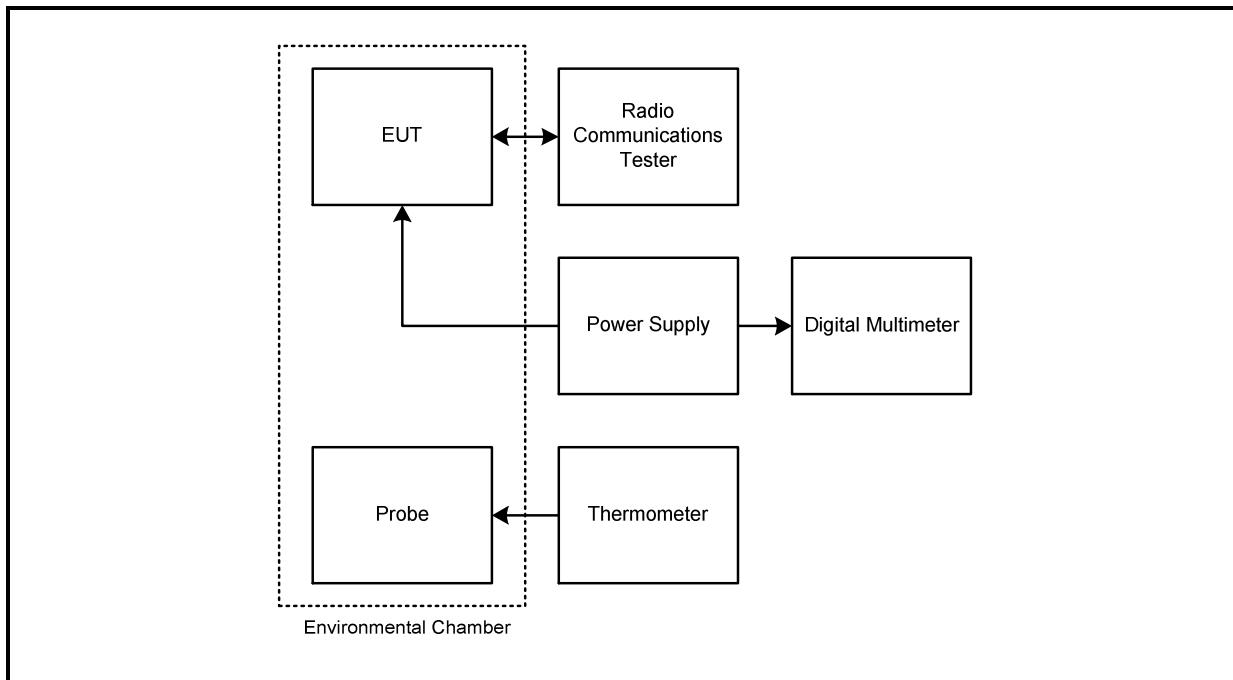Test setup:

Transmitter Frequency Stability (Temperature Variation) (continued)**Results: Bottom Channel (1852.4 MHz)**

Temperature (°C)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
-30	5	1852.399995	1850.0	2.399995	Complied
-20	9	1852.399991	1850.0	2.399991	Complied
-10	10	1852.399990	1850.0	2.399990	Complied
0	9	1852.399991	1850.0	2.399991	Complied
10	6	1852.399994	1850.0	2.399994	Complied
20	7	1852.400007	1850.0	2.400007	Complied
30	5	1852.400005	1850.0	2.400005	Complied
40	10	1852.400010	1850.0	2.400010	Complied
50	16	1852.400016	1850.0	2.400016	Complied

Results: Top Channel (1907.6 MHz)

Temperature (°C)	Frequency Error (Hz)	Measured Frequency (MHz)	Upper Band Edge Limit (MHz)	Margin (MHz)	Result
-30	7	1907.599993	1910.0	2.400007	Complied
-20	13	1907.600013	1910.0	2.399987	Complied
-10	14	1907.600014	1910.0	2.399986	Complied
0	23	1907.600023	1910.0	2.399977	Complied
10	8	1907.600008	1910.0	2.399992	Complied
20	7	1907.599993	1910.0	2.400007	Complied
30	6	1907.599994	1910.0	2.400006	Complied
40	10	1907.599990	1910.0	2.400010	Complied
50	21	1907.599979	1910.0	2.400021	Complied

Transmitter Frequency Stability (Temperature Variation) (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	02 April 2017	12
M1869	Wideband Radio Comms Tester	Rohde & Schwarz	CMW 500	145923	05 April 2017	12
M1674	Environmental Chamber	Espec Corporation	SU-241	90213139	Calibrated before use	-
M1642	Thermometer	Fluke	52II	18890119	25 April 2017	12
S021	Dual DC power supply	Thurlby Thandar Instruments	PL330QMD	066701	Calibrated before use	-
M122	Multimeter	Fluke	77	64910017	21 April 2017	12

5.2.9. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

Test Engineer:	Stefan Ho	Test Date:	11 May 2016
Test Sample Serial Number:	C7CRG02QH6DH		

FCC Reference:	Parts 2.1055 & 24.235
Test Method Used:	KDB 971168 Section 9.0 / ANSI/TIA-603-D-2010 Section 2.2.2 and FCC Part 2.1055
Test Mode:	RMC

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	40

Note(s):

1. Flying leads were connected internally to the EUT in place of the battery. These leads were extended and connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde and Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde and Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

Results: Bottom Channel (1852.4 MHz)

Supply Voltage (V)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
3.5	27	1852.400027	1850.0	2.400027	Complied
4.4	32	1852.400032	1850.0	2.400032	Complied

Results: Top Channel (1907.6 MHz)

Supply Voltage (V)	Frequency Error (Hz)	Measured Frequency (MHz)	Upper Band Edge Limit (MHz)	Margin (MHz)	Result
3.5	20	1907.600020	1910.0	2.399980	Complied
4.4	15	1907.600015	1910.0	2.399985	Complied

Transmitter Frequency Stability (Voltage Variation) (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	02 April 2017	12
M1869	Wideband Radio Comms Tester	Rohde & Schwarz	CMW 500	145923	05 April 2017	12
S0576	Dual DC power supply	Thurlby Thandar Instruments	PL330QMD	066701	Calibrated before use	-
M122	Multimeter	Fluke	77	64910017	21 April 2017	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Output Power	1850 to 1910 MHz	95%	±1.13 dB
Frequency Stability	1850 to 1910 MHz	95%	±23 Hz
Occupied Bandwidth	1850 to 1910 MHz	95%	±3.92 %
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 20 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	- 6 7 9 All 11 to 20 32 & 37	- - - - - - -	At the request of the TCB: Inserted usage of sample Changed 'RFID' reference to 'NFC' Updated Section 4.2 Changed 'KDB 971168' references to 'KDB 971168 D01' Corrected power measurements and result margins Inserted Notes 3 & 5
3.0	12,13,17 & 18	-	Corrected β_c value for HSUPA Sub-test 1
4.0	- 9	- -	At the request of the TCB: Section 4.2. Inserted Bullet 3

--- END OF REPORT ---