



TEST REPORT

Test Report No. : UL-RPT-RP11265293JD07B

Manufacturer : Apple Inc.
Model No. : A1785
FCC ID : BCG-E3088A
Technology : *Bluetooth – Basic Rate & EDR (iPA)*
Test Standard(s) : FCC Parts 15.209(a) & 15.247

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0

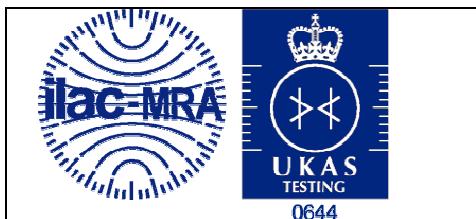
Date of Issue: 03 August 2016

Checked by: Steven White

Steven White
Service Lead, Radio Laboratory

Company Signatory: Sarah Williams

Sarah Williams
Senior Engineer, Radio Laboratory
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its terms
of accreditation.

The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL VS LTD is under licence. Other trademarks and trade names are those of their respective owners.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	8
3.3. Modifications Incorporated in the EUT	8
3.4. Additional Information Related to Testing	9
3.5. Support Equipment	9
4. Operation and Monitoring of the EUT during Testing	10
4.1. Operating Modes	10
4.2. Configuration and Peripherals	10
4.3. Measurements, Examinations and Derived Results	11
4.4. General Comments	11
4.5. Test Results	12
4.5.1. Transmitter 20 dB Bandwidth	12
4.5.2. Transmitter Carrier Frequency Separation	17
4.5.3. Transmitter Number of Hopping Frequencies and Average Time of Occupancy	20
4.5.4. Transmitter Maximum Peak Output Power	23
4.5.5. Transmitter Radiated Emissions	31
4.5.6. Transmitter Band Edge Radiated Emissions	38
5. Measurement Uncertainty	46
6. Report Revision History	47

1. Customer Information

Company Name:	Apple
Address:	1 Infinite Loop Cupertino, CA 95014 U.S.A

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.209
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	07 June 2016 to 22 July 2016

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.247(a)(1)	Transmitter 20 dB Bandwidth	✓
Part 15.247(a)(1)	Transmitter Carrier Frequency Separation	✓
Part 15.247(a)(1)(iii)	Transmitter Number of Hopping Frequencies and Average Time of Occupancy	✓
Part 15.247(b)(1)	Transmitter Maximum Peak Output Power	✓
Part 15.247(d) & 15.209(a)	Transmitter Radiated Emissions	✓
Part 15.247(d) & 15.209(a)	Transmitter Band Edge Radiated Emissions	✓
Key to Results		
✓	= Complied	✗ = Did not comply

Note(s):

1. There are two vendors of the WiFi/Bluetooth radio modules, Vendor 1 and Vendor 2.
2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g. the same packaging dimension and pin layout), use the same on-board antenna matching circuit, have an identical antenna structure and are built and tested to conform to the same specification and to operate within the same tolerances.

Baseline testing was performed on the two vendors to determine the worst case.

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1785
Test Sample Serial Number:	C39RP03EH95Y (<i>Conducted sample #1 with RF port</i>)
Hardware Version:	REV 1.0
Test Utility software:	wl 1.359 RC65.0
FCC ID:	BCG-E3088A

Brand Name:	Apple
Model Name or Number:	A1785
Test Sample Serial Number:	C39RW01MHFML (<i>Conducted sample #2 with RF port</i>)
Hardware Version:	REV 1.0
Test Utility software:	wl 1.359 RC65.0
FCC ID:	BCG-E3088A

Brand Name:	Apple
Model Name or Number:	A1785
Test Sample Serial Number:	C39RW001HFMH (<i>Radiated Sample #1</i>)
Hardware Version:	REV 1.0
Test Utility software:	wl 1.359 RC65.0
FCC ID:	BCG-E3088A

Brand Name:	Apple
Model Name or Number:	A1785
Test Sample Serial Number:	C39RV001HFML (<i>Radiated Sample #2</i>)
Hardware Version:	REV 1.0
Test Utility software:	wl 1.359 RC65.0
FCC ID:	BCG-E3088A

3.2. Description of EUT

The Equipment Under Test was a mobile phone, with GSM/GPRS/EGPRS/UMTS/LTE/TD-SCDMA and CDMA Technologies. It also supports IEEE 802.11 a/b/g/n/ac, Bluetooth®, GPS and NFC.

The Rechargeable battery is not user accessible.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	<i>Bluetooth</i>				
Power Supply Requirement:	Nominal	3.8 VDC			
Type of Unit:	Transceiver				
Channel Spacing:	1 MHz				
Mode:	Basic Rate	Enhanced Data Rate			
Modulation:	GFSK	$\pi/4$ -DQPSK	8DPSK		
Packet Type: (Maximum Payload)	DH5	2DH5	3DH5		
Data Rate (Mbps):	1	2	3		
Maximum Conducted Output Power:	10.0 dBm				
Antenna Gain:	-2.2 dBi				
Transmit Frequency Range:	2402 MHz to 2480 MHz				
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)		
	Bottom	0	2402		
	Middle	39	2441		
	Top	78	2480		

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C1ML807FDV30

Description:	USB Diagnostic Cable
Brand Name:	Apple
Model Name or Number:	Kong
Serial Number:	207560

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Continuously transmitting on bottom, middle and top channels in Basic Rate (DH5 packets) or EDR (2DH5 or 3DH5 packets)
- Continuously transmitting whilst hopping across all channels in Basic Rate (DH5 packets) or EDR (2DH5 or 3DH5 packets)

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- A test laptop with a third party test application was provided by the customer and was used to place the EUT into *Bluetooth* test mode. The application was used to enable continuous transmission in different modes, set transmit power settings and change channels as required.
- The EUT was powered by a bench DC power supply whilst being connected to the test laptop via a USB diagnostic cable for all conducted tests.
- The customer supplied an RF connector cable to facilitate a conducted RF link between the EUT and a spectrum analyser through suitable attenuation. This was taken into account for path loss calculations.
- The customer supplied instructions to control the EUT in a document titled "AA1501_BT-iPA_v2.1.docx" dated 13/07/2016 which is stored on the company server.
- The EUT was placed in three orthogonal orientations X, Y and Z to determine the worst case orientation for radiated spurious emissions and the worst case for was Y orientation (EUT standing up).
- The worst-case radiated emission among all accessories is determined by the manufacturer to be with the headset connected. The compliance lab performed final testing only with the headset.

4.3. Measurements, Examinations and Derived Results

4.4. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

4.5. Test Results

4.5.1. Transmitter 20 dB Bandwidth

Test Summary:

Test Engineer:	Sandeep Bharat	Test Date:	07 June 2016
Test Sample Serial Number:	C39RP03EH95Y		

FCC Reference:	Part 15.247(a)(1)
Test Method Used:	ANSI C63.10 Section 6.9.2

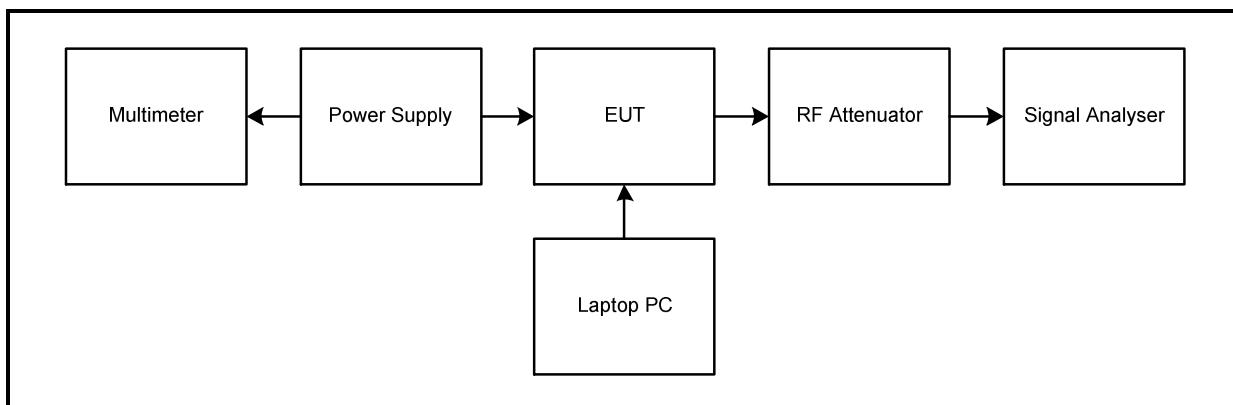
Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	49

Note(s):

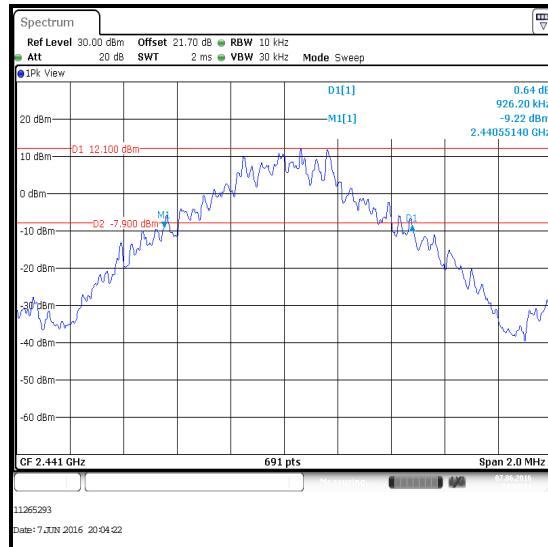
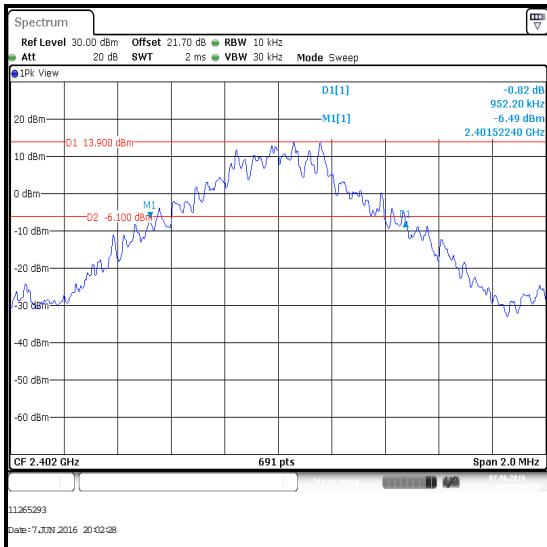
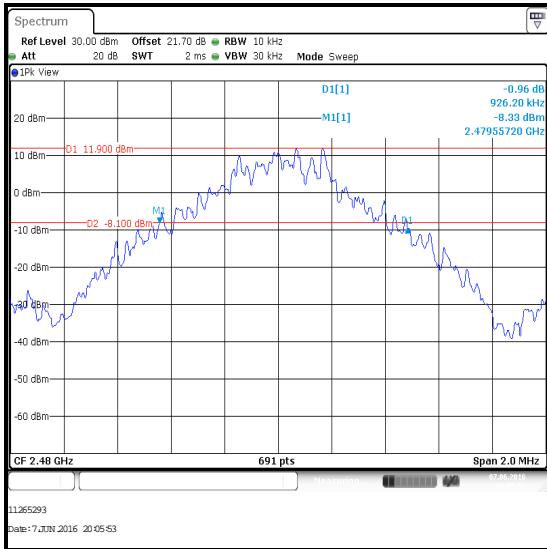
1. The signal analyser resolution bandwidth was set between 1% & 5% of the occupied bandwidth and the video bandwidth set to 3 times the resolution bandwidth. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set between 2 and 5 times the bandwidth of the signal. Normal and delta markers were placed 20 dB down from the peak of the carrier. These results are documented in the table below.
2. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

Test setup:



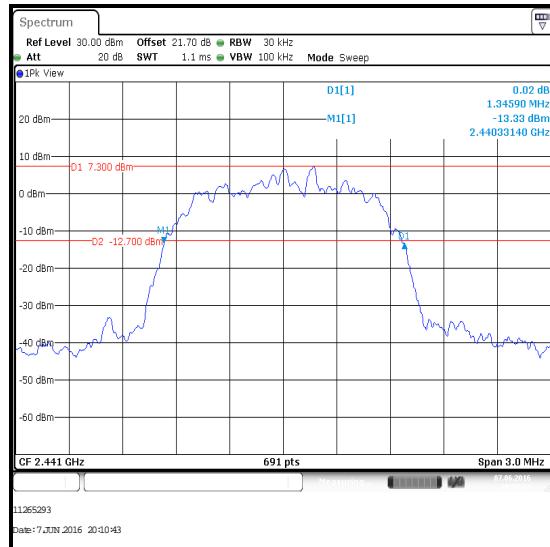
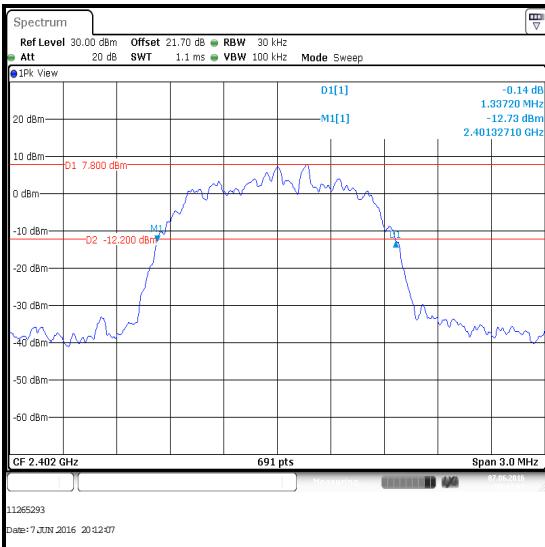
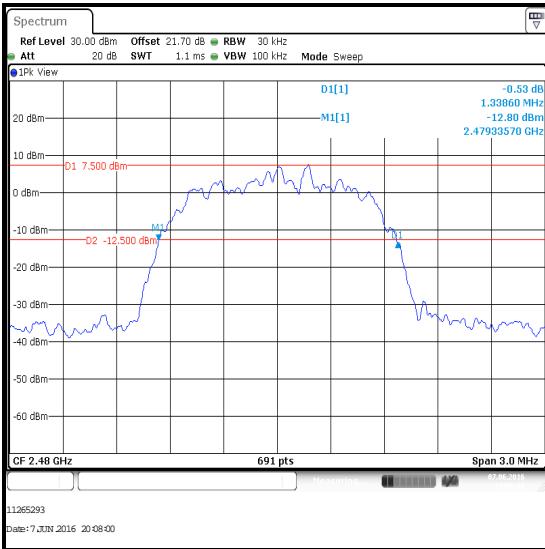
Transmitter 20 dB Bandwidth (continued)**Results DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	952.200
Middle	926.200
Top	926.200

**Bottom Channel****Middle Channel****Top Channel**

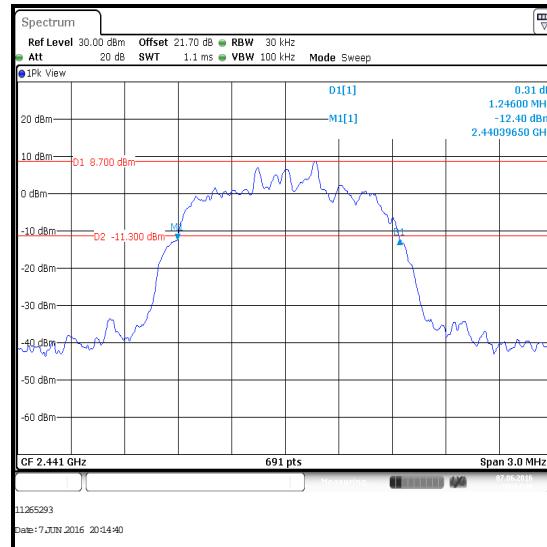
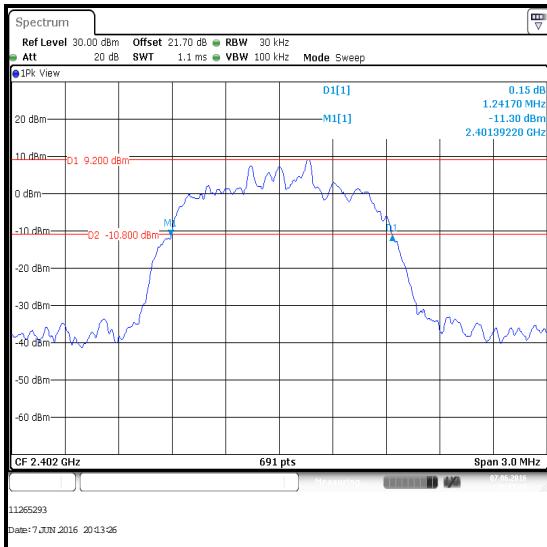
Transmitter 20 dB Bandwidth (continued)**Results 2DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	1337.200
Middle	1345.900
Top	1338.600

**Bottom Channel****Top Channel****Middle Channel**

Transmitter 20 dB Bandwidth (continued)**Results 3DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	1241.700
Middle	1246.000
Top	1246.000

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 20 dB Bandwidth (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	02 Apr 2017	12
M1883	Signal Analyser	Rohde & Schwarz	FSV30	103084	09 May 2017	12
A1999	Attenuator	Huber & Suhner	6820.17.B	07101	Calibrated before use	-
G0607	Signal Generator	Rohde & Schwarz	SMU200A	100943	10 May 2019	36
S0576	DC Power Supply	Thurlby Thandar	PL330QMD	066701	Calibrated before use	-
M122	Digital Multimeter	Fluke	77	64910017	21 Apr 2017	12

4.5.2. Transmitter Carrier Frequency Separation

Test Summary:

Test Engineer:	Sandeep Bharat	Test Date:	07 June 2016
Test Sample Serial Number:	C39RP03EH95Y		

FCC Reference:	Part 15.247(a)(1)
Test Method Used:	ANSI C63.10 Section 7.8.2

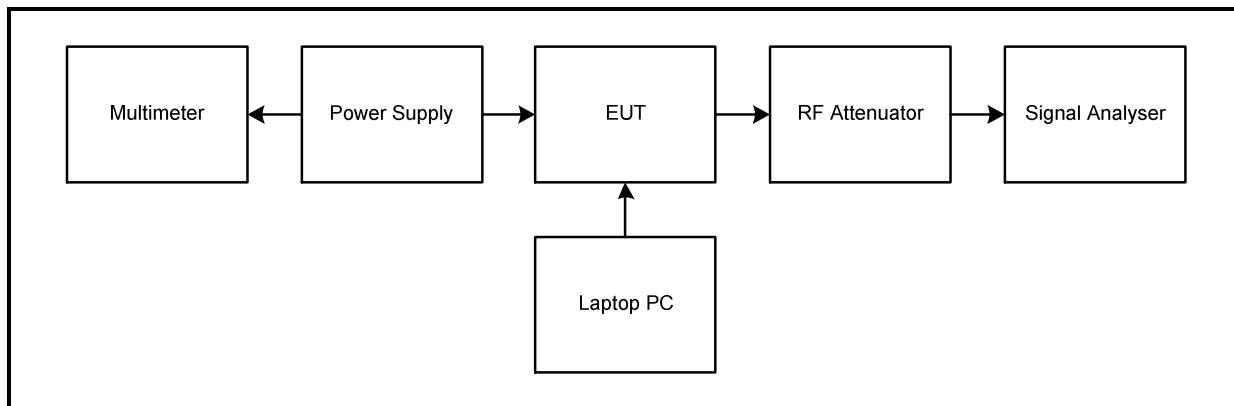
Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	49

Note(s):

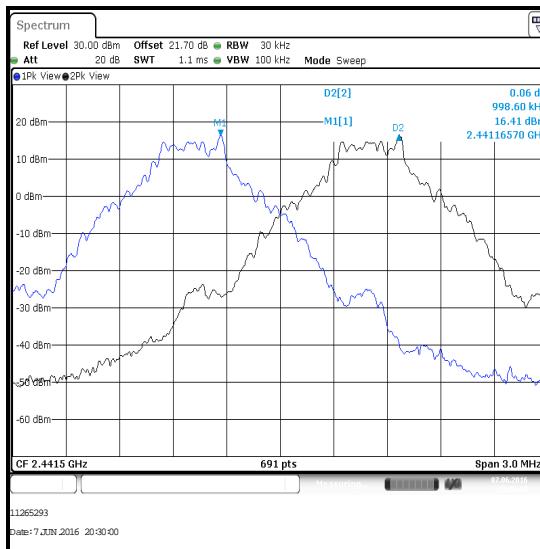
1. The 20 dB bandwidth measured for the middle channel operating at 2441 MHz was used to calculate the limit.
2. The signal analyser centre frequency was set at the mid frequency of channels 39 and 40. The resolution bandwidth was set to 30 kHz and video bandwidth of 100 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 3 MHz. A marker was placed on each of the corresponding peaks of the adjacent channels, with the frequency difference recorded in the tables below for each mode of operation.
3. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

Test setup:

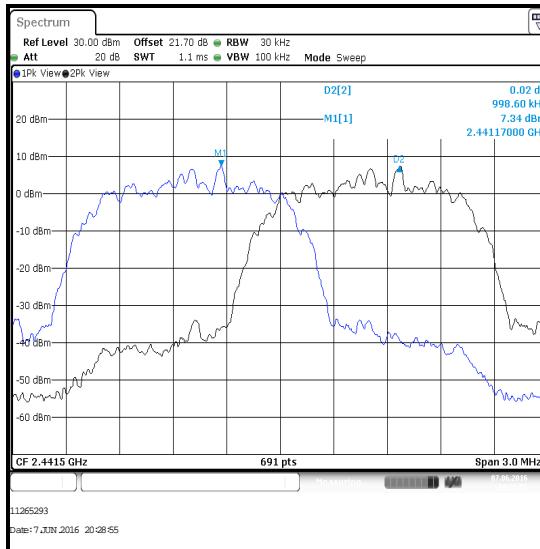


Transmitter Carrier Frequency Separation (continued)**Results: DH5**

Carrier Frequency Separation (kHz)	Limit $\frac{2}{3}$ of 20 dB BW (kHz)	Margin (kHz)	Result
998.600	617.467	381.133	Complied

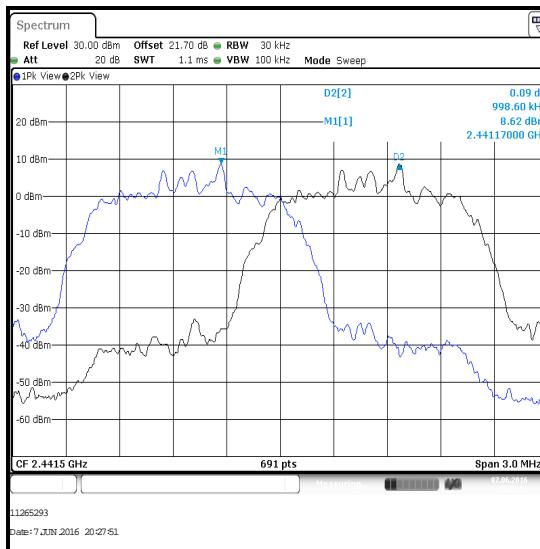
**Results: 2DH5**

Carrier Frequency Separation (kHz)	Limit $\frac{2}{3}$ of 20 dB BW (kHz)	Margin (kHz)	Result
998.600	897.267	101.333	Complied



Transmitter Carrier Frequency Separation (continued)**Results: 3DH5**

Carrier Frequency Separation (kHz)	Limit $\frac{2}{3}$ of 20 dB BW (kHz)	Margin (kHz)	Result
998.600	830.667	167.933	Complied

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	02 Apr 2017	12
M1883	Signal Analyser	Rohde & Schwarz	FSV30	103084	09 May 2017	12
A1999	Attenuator	Huber & Suhner	6820.17.B	07101	Calibrated before use	-
G0607	Signal Generator	Rohde & Schwarz	SMU200A	100943	10 May 2019	36
S0576	DC Power Supply	Thurlby Thandar	PL330QMD	066701	Calibrated before use	-
M122	Digital Multimeter	Fluke	77	64910017	21 Apr 2017	12

4.5.3. Transmitter Number of Hopping Frequencies and Average Time of Occupancy

Test Summary:

Test Engineer:	Sandeep Bharat	Test Dates:	07 June 2016 & 11 July 2016
Test Sample Serial Number:	C39RP03EH95Y		

FCC Reference:	Part 15.247(a)(1)(iii)
Test Method Used:	ANSI C63.10 Sections 7.8.3 & 7.8.4

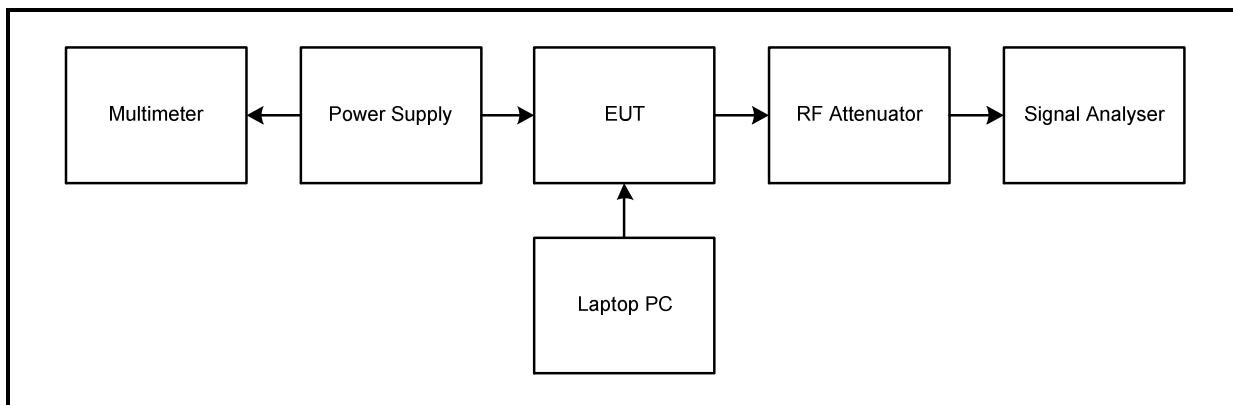
Environmental Conditions:

Temperature (°C):	23 to 26
Relative Humidity (%):	37 to 49

Note(s):

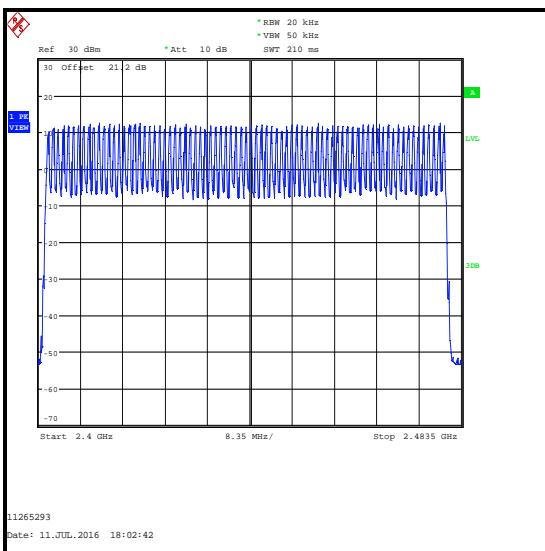
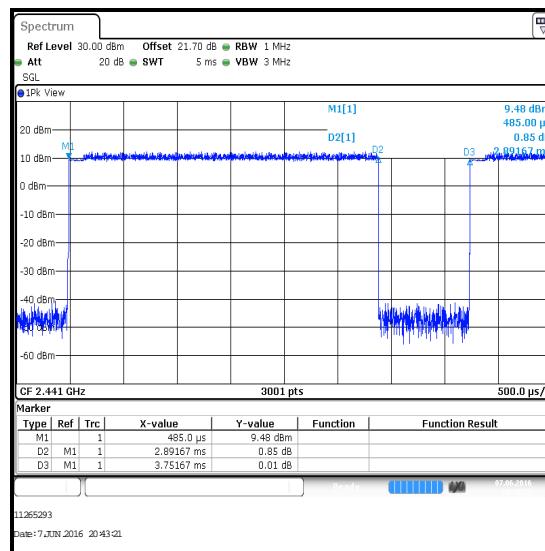
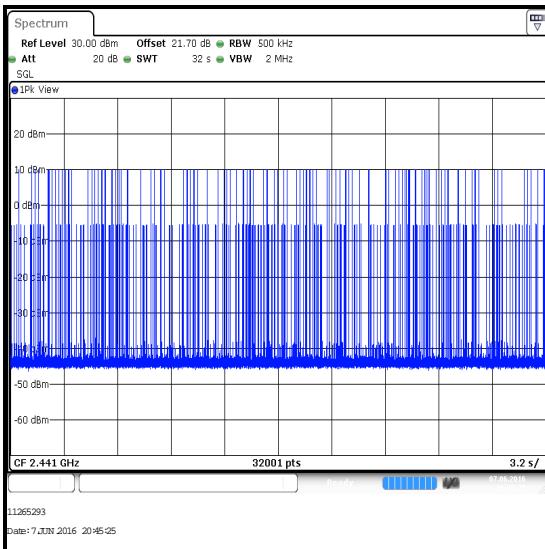
1. Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.
2. The signal analyser was set up for the Number of Hopping Frequencies measurement as follows: the resolution bandwidth was set to 20 kHz and video bandwidth to 50 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 83.5 MHz.
3. The signal analyser was set up for the Emission Width measurement as follows: the resolution bandwidth was set to 1 MHz and video bandwidth of 3 MHz. A peak detector was used and sweep time was set to auto with a span of zero Hz. The signal analyser was set to trigger at 1 ms, with a marker placed at the start of the emission and a delta marked place at the end of the emission. The emission width is recorded in the table below.
4. The signal analyser was set up for the Number of Hopping Frequencies in 32 seconds measurement as follows: the resolution bandwidth was set to 500 kHz and video bandwidth of 2 MHz. A peak detector was used and sweep time was set to 32 seconds. The EUT was set to transmit in a hopping frequency mode with zero span. The total number of hopping frequencies were recorded in the table below.
5. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

Test setup:



Transmitter Number of Hopping Frequencies and Average Time of Occupancy (continued)**Results:**

Emission Width (μs)	Number of Hops in 31.6 Seconds	Average Time of Occupancy (s)	Limit (s)	Margin (s)	Result
2891.670	97	0.280	0.4	0.120	Complied

**Number of Hopping Frequencies****Emission Width****Number of Hopping Frequencies in 32 s**

Transmitter Number of Hopping Frequencies and Average Time of Occupancy (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	02 Apr 2017	12
M1883	Signal Analyser	Rohde & Schwarz	FSV30	103084	09 May 2017	12
A1999	Attenuator	Huber & Suhner	6820.17.B	07101	Calibrated before use	-
S0576	DC Power Supply	Thurlby Thandar	PL330QMD	066701	Calibrated before use	-
M122	Digital Multimeter	Fluke	77	64910017	21 Apr 2017	12
M2002	Thermohygrometer	Testo	608-H1	45041825	02 Apr 2017	12
S021	Power Supply Unit	Thurlby Thandar	CPX200	061034	Calibrated before use	-
M1642	Multimeter	Fluke	52II	18890119	25 Apr 2017	12
A2724	Directional Coupler	AAMCS	AAMCS-UDC-0.5G-18G-10dB-SF	000641	Calibrated before use	-
G0607	Signal Generator	Rohde & Schwarz	SMU200A	100943	10 May 2019	36
A2521	Attenuator	AtlanTecRF	AN18-20	832797#2	Calibrated before use	-
M1794	Spectrum Analyser	Rohde & Schwarz	FSU26	100027	09 Feb 2018	24

4.5.4. Transmitter Maximum Peak Output Power

Test Summary:

Test Engineer:	Sandeep Bharat	Test Date:	12 July 2016
Test Sample Serial Number:	C39RW01MHFML		

FCC Reference:	Part 15.247(b)(1)
Test Method Used:	ANSI C63.10 Section 7.8.5

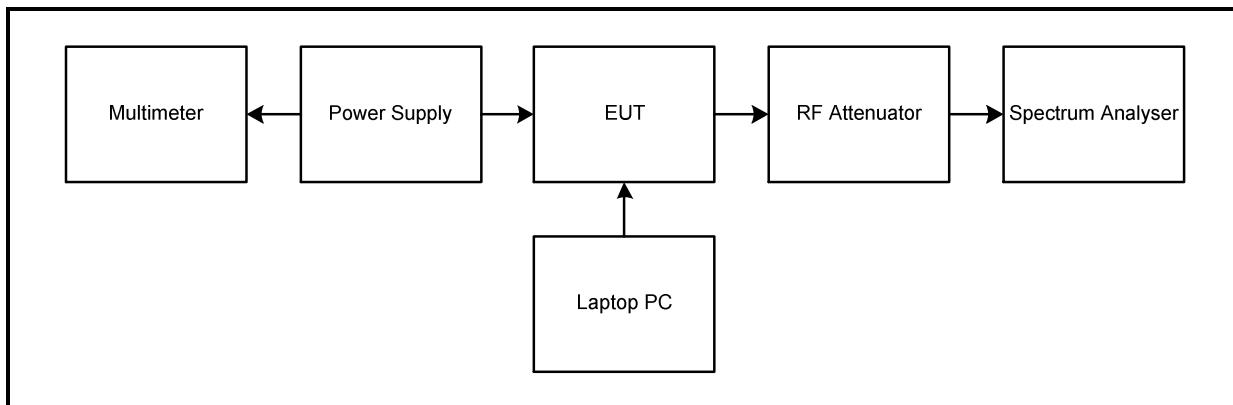
Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	46

Note(s):

1. The spectrum analyser resolution bandwidth was set to 2 MHz (20 dB bandwidth) and video bandwidth of 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 5 MHz (approximately five times the 20 dB bandwidth). A marker was placed at the peak of the signal and the results recorded in the tables below.
2. The declared antenna gain was added to the conducted peak power to obtain the EIRP.
3. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF offset level was entered on the spectrum analyser to compensate for the loss of the attenuator and RF cable.

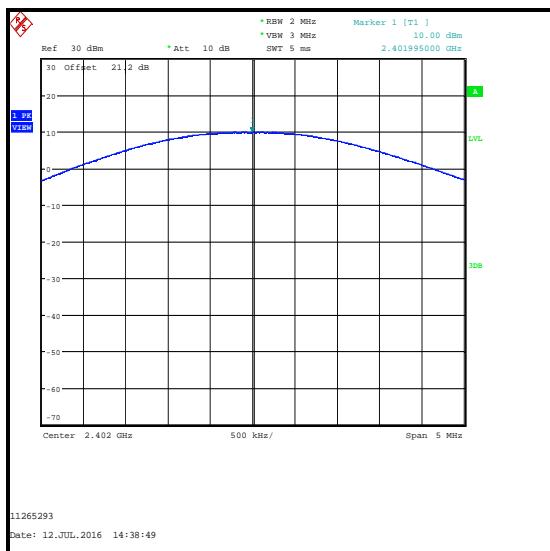
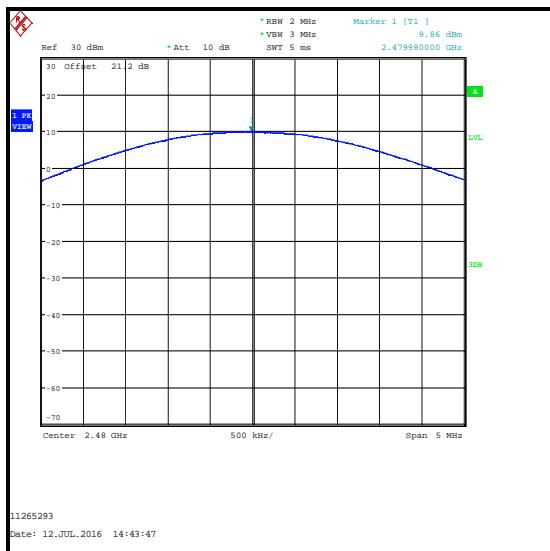
Test setup:



Transmitter Maximum Peak Output Power (continued)**Results: DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	10.0	30.0	20.0	Complied
Middle	9.9	30.0	20.1	Complied
Top	9.9	30.0	20.1	Complied

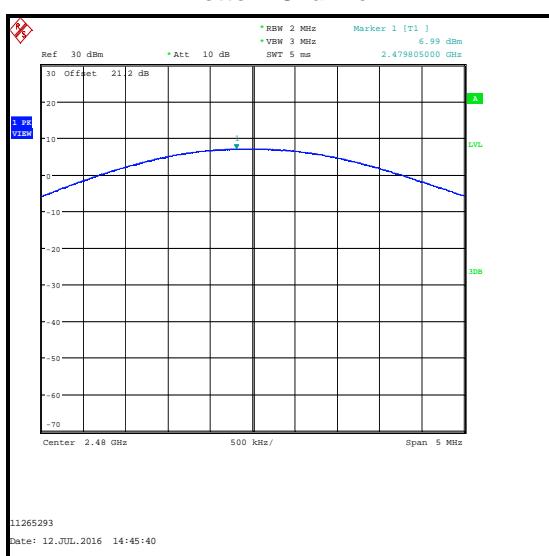
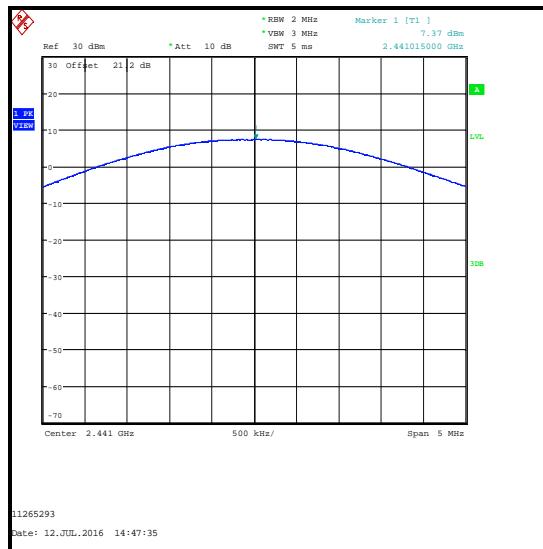
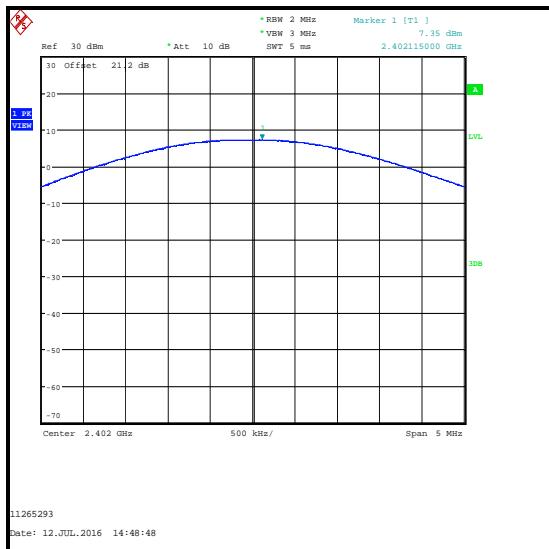
Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	10.0	-2.2	7.8	36.0	28.2	Complied
Middle	9.9	-2.2	7.7	36.0	28.3	Complied
Top	9.9	-2.2	7.7	36.0	28.3	Complied

Transmitter Maximum Peak Output Power (continued)**Results: DH5****Bottom Channel****Middle Channel****Top Channel**

Transmitter Maximum Peak Output Power (continued)**Results: 2DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	7.4	21.0	13.6	Complied
Middle	7.4	21.0	13.6	Complied
Top	7.0	21.0	14.0	Complied

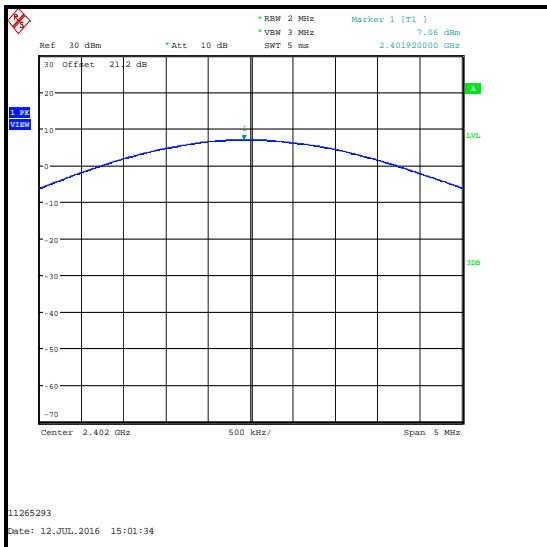
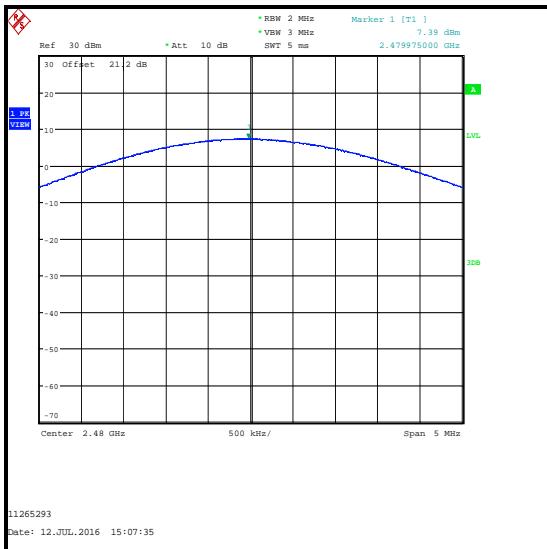
Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	7.4	-2.2	5.2	27.0	21.8	Complied
Middle	7.4	-2.2	5.2	27.0	21.8	Complied
Top	7.0	-2.2	4.8	27.0	22.2	Complied

Transmitter Maximum Peak Output Power (continued)**Results: 2DH5**

Transmitter Maximum Peak Output Power (continued)**Results: 3DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	7.1	21.0	13.9	Complied
Middle	7.2	21.0	13.8	Complied
Top	7.4	21.0	13.6	Complied

Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	7.1	-2.2	4.9	27.0	22.1	Complied
Middle	7.2	-2.2	5.0	27.0	22.0	Complied
Top	7.4	-2.2	5.2	27.0	21.8	Complied

Transmitter Maximum Peak Output Power (continued)**Results: 3DH5****Bottom Channel****Top Channel****Middle Channel**

Transmitter Maximum Peak Output Power (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2002	Thermohygrometer	Testo	608-H1	45041825	02 Apr 2017	12
S021	Power Supply Unit	Thurlby Thandar	CPX200	061034	Calibrated before use	-
M1642	Multimeter	Fluke	52II	18890119	25 Apr 2017	12
A2724	Directional Coupler	AAMCS	AAMCS-UDC-0.5G-18G-10dB-SF	000641	Calibrated before use	-
G0607	Signal Generator	Rohde & Schwarz	SMU200A	100943	10 May 2019	36
A2521	Attenuator	AtlanTecRF	AN18-20	832797#2	Calibrated before use	-
M1794	Spectrum Analyser	Rohde & Schwarz	FSU26	100027	09 Feb 2018	24

4.5.5. Transmitter Radiated Emissions

Test Summary:

Test Engineer:	Andrew Edwards	Test Date:	25 July 2016
Test Sample Serial Number:	C39RW001HFMH		

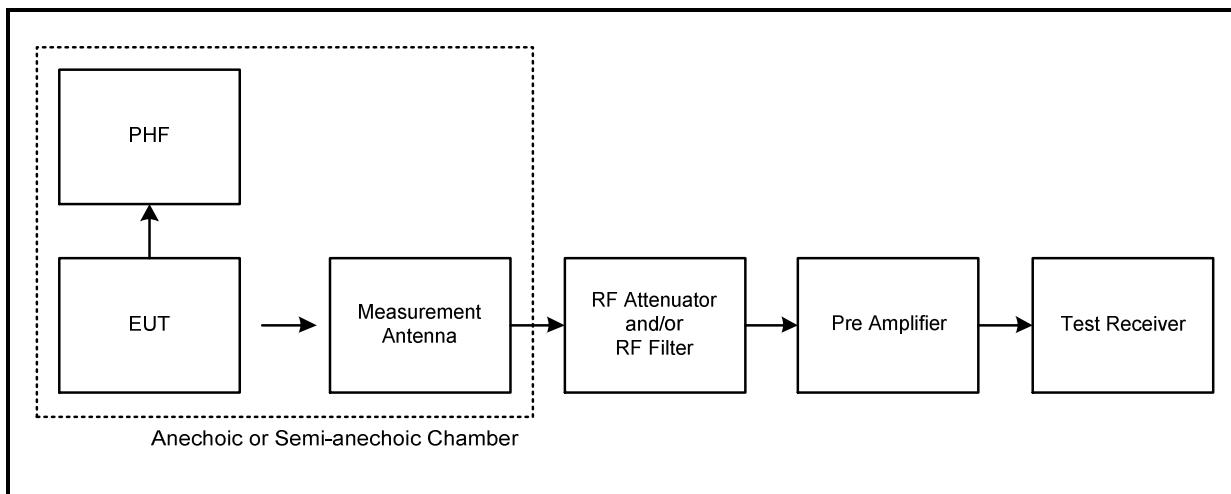
FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.5
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	43

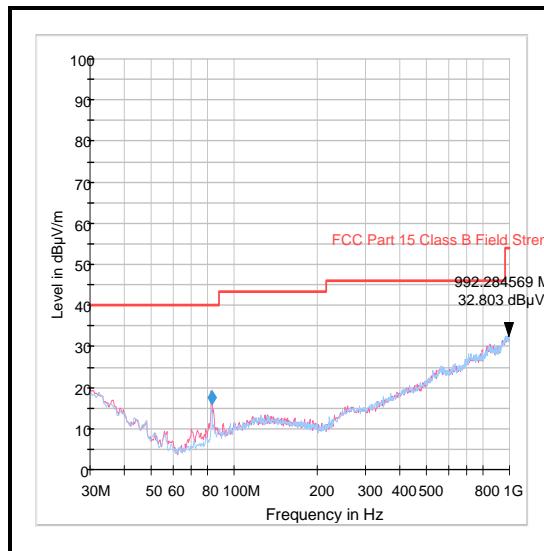
Note(s):

1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting in DH5 mode as this was found to transmit the highest power and therefore deemed worst case.
2. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
3. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
4. All emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
6. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. The sweep time was set to auto. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
7. Final measurements were performed on the marker frequencies and the results entered into the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR quasi-peak detector and span big enough to see the whole emission.

Transmitter Radiated Emissions (continued)**Test setup for radiated measurements:**

Transmitter Radiated Emissions (continued)**Results: Quasi-Peak / DH5**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
992.285	Vertical	32.8	54.0	21.2	Complied

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2014	Thermohygrometer	Testo	608-H1	45046246	10 Jun 2017	12
K0001	3m RSE Chamber	Rainford EMC	N/A	N/A	12 Jan 2017	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	11 Apr 2017	12
A2959	Antenna	Schwarzbeck	VULB 9163	9163-967	22 Apr 2017	12
G0543	Pre Amplifier	Sonoma Instrument Co.	310N	230801	09 Dec 2016	6
A1834	Attenuator	Hewlett Packard	8491B	10444	30 Mar 2017	12

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	Jingang Li & Andrew Edwards	Test Date:	18 to 26 July 2016
Test Sample Serial Number:	C39RW001HFMH		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.6
Frequency Range	1 GHz to 25 GHz

Environmental Conditions:

Temperature (°C):	22 to 24
Relative Humidity (%):	41 to 48

Note(s):

1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting in DH5 mode, as this was found to transmit the highest power and therefore deemed worst case.
2. Pre scans above 1 GHz were performed on top, middle and bottom channels. Each channel of operation provided similar results during these pre scans and so for the purposes of this report, only middle channel pre-scan results have been shown.
3. All emissions were at least 20 dB below the specification limit or below the measurement system noise floor. Therefore the highest noise floor reading of the measuring receiver for middle and bottom channels has been recorded in the table below. All plots are available on the company server if require.
4. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
5. The emission shown on the 1 GHz to 4 GHz plot is the EUT fundamental at 2441 MHz.
6. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable.
7. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto. Peak and average measurements were performed with their own appropriate detectors during the pre-scan measurements.

Transmitter Radiated Emissions (continued)**Bottom Channel Results: Peak**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
3570.346	Horizontal	59.7	74.0	14.3	Complied

Bottom Channel Results: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
3579.962	Horizontal	49.4	54.0	4.6	Complied

Middle Channel Results: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
3534.346	Horizontal	59.1	74.0	14.9	Complied

Middle Channel Results: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
3570.346	Horizontal	49.5	54.0	4.5	Complied

Top Channel Results: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4960.192	Horizontal	46.3	74.0	27.7	Complied

Top Channel Results: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4960.192	Vertical	41.6	54.0	12.4	Complied

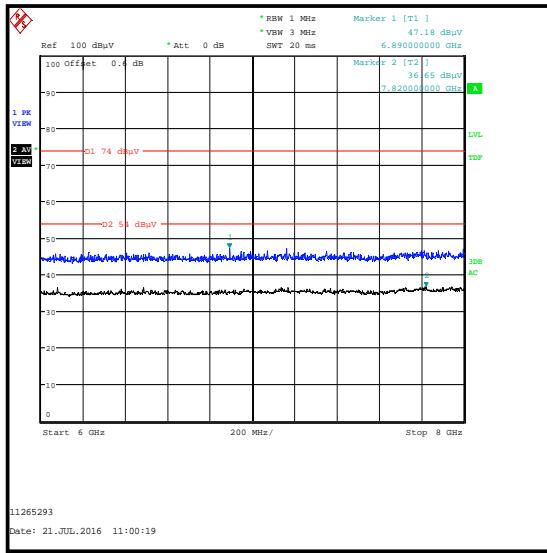
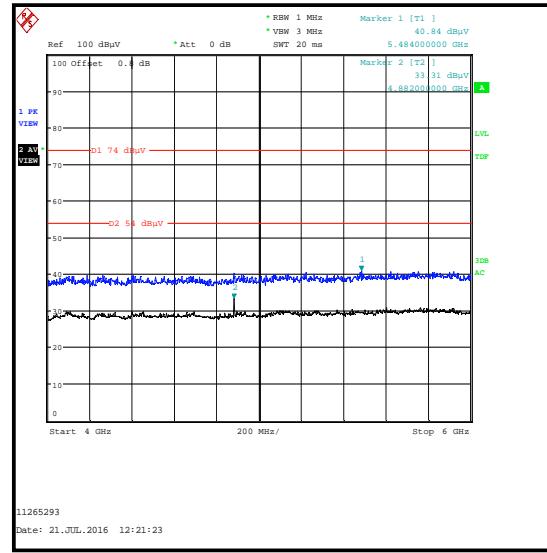
Hopping Channel Results: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4920.205	Horizontal	45.6	74.0	28.4	Complied

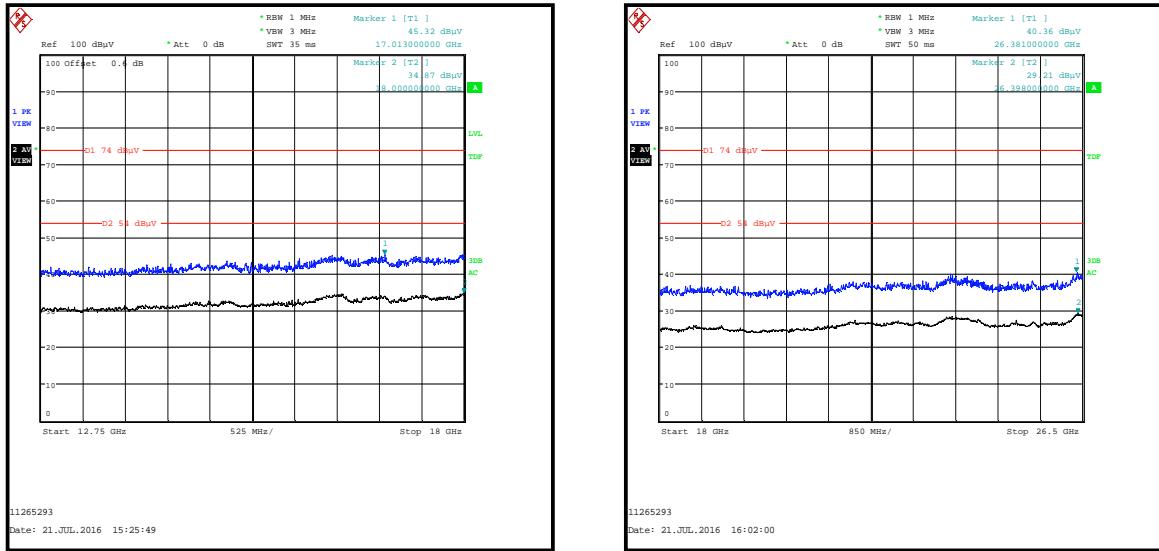
Hopping Channel Results: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4920.205	Vertical	41.6	54.0	12.4	Complied

Transmitter Radiated Emissions (continued)



Transmitter Radiated Emissions (continued)



Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	19 Dec 2016	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	21 Mar 2017	12
A1818	Antenna	EMCO	3115	00075692	17 Dec 2016	12
A253	Antenna	Flann Microwave	12240-20	128	17 Dec 2016	12
A254	Antenna	Flann Microwave	14240-20	139	17 Dec 2016	12
A255	Antenna	Flann Microwave	16240-20	519	17 Dec 2016	12
A256	Antenna	Flann Microwave	18240-20	400	17 Dec 2016	12
A436	Antenna	Flann Microwave	20240-20	330	19 Dec 2016	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	26 Apr 2017	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	26 Apr 2017	12

4.5.6. Transmitter Band Edge Radiated Emissions**Test Summary:**

Test Engineer:	Jingang Li	Test Date:	18 th to 21 st July
Test Sample Serial Number:	C39RW001HFMH		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.10

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	44

Note(s):

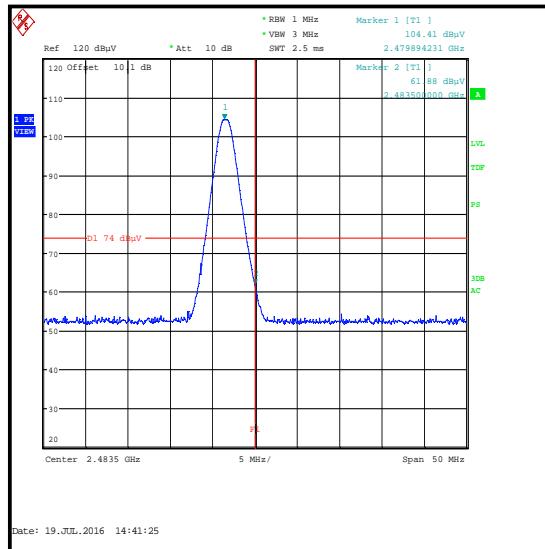
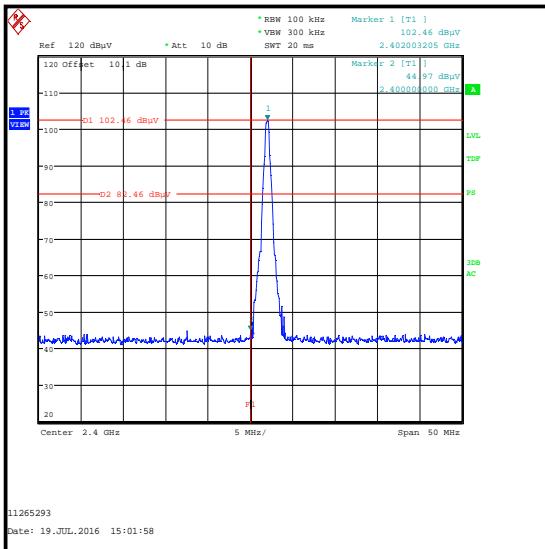
1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The lower band edge falls within a non-restricted band. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
3. The upper band edge falls within a restricted band. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. Peak and average measurements were performed with their respective detectors, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
4. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace..
5. * -20 dBc limit.

Transmitter Band Edge Radiated Emissions (continued)

Results: Static Mode / DH5

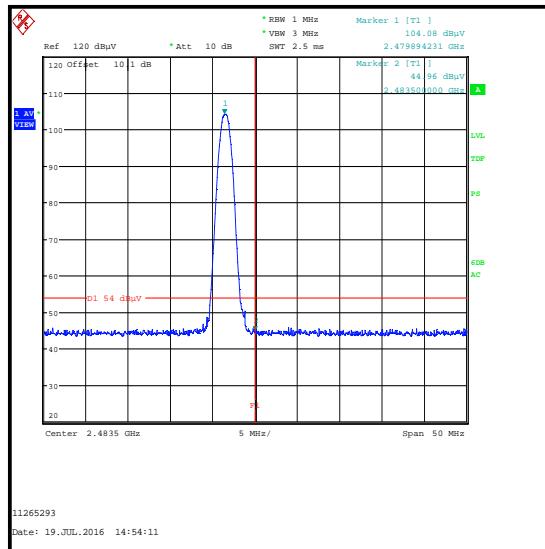
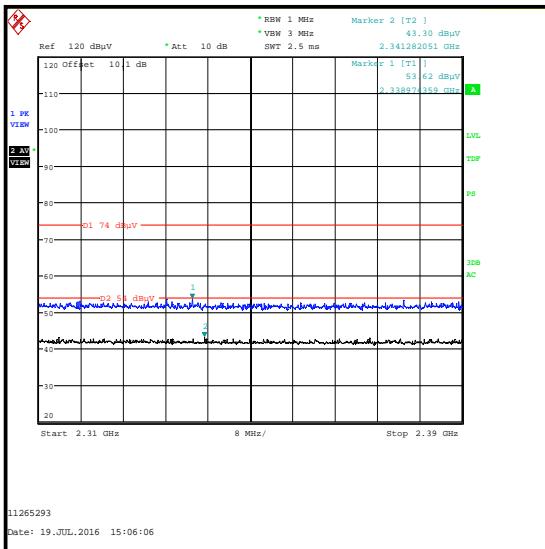
Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	44.97	82.46*	37.49	Complied
2483.5	Vertical	61.88	74.0	12.12	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	44.96	54.0	9.04	Complied



Lower Band Edge Peak Static

Upper Band Edge Peak Static



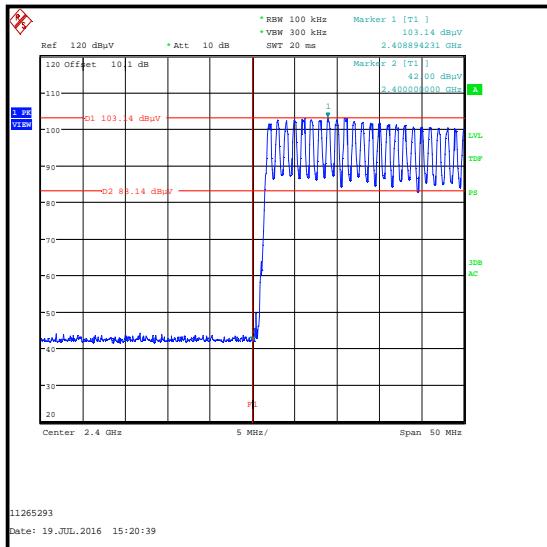
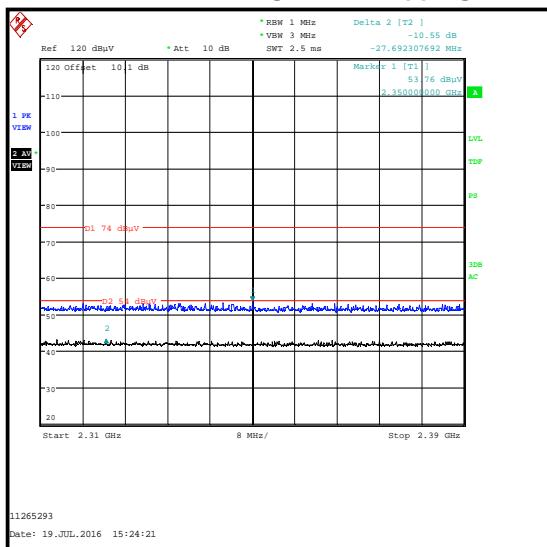
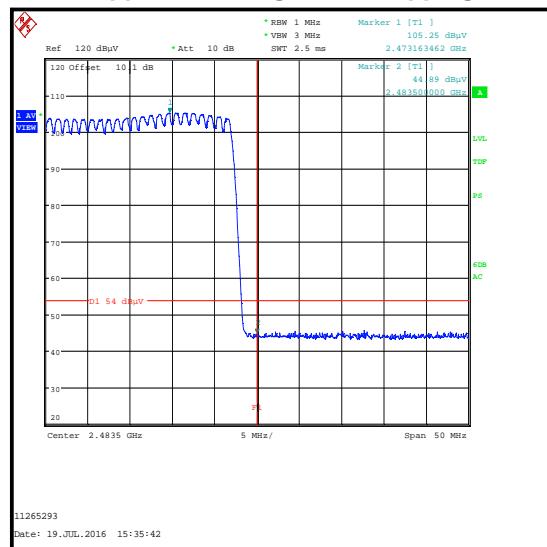
2310 MHz to 2390 MHz Restricted Band Plot

Upper Band Edge Average Static

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	42.0	83.14*	41.14	Complied
2483.5	Vertical	61.25	74.0	12.75	Complied

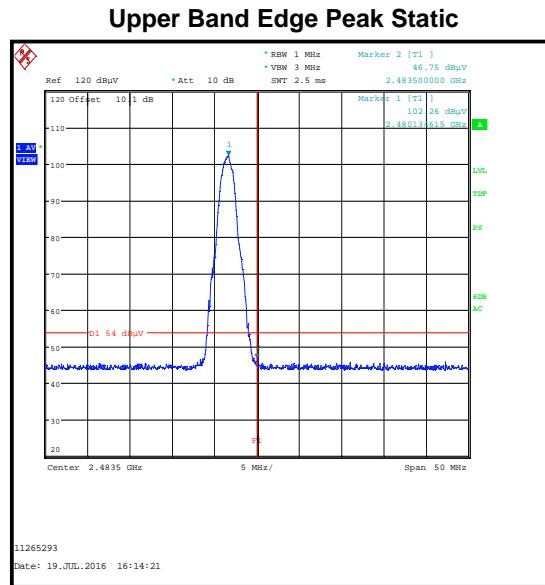
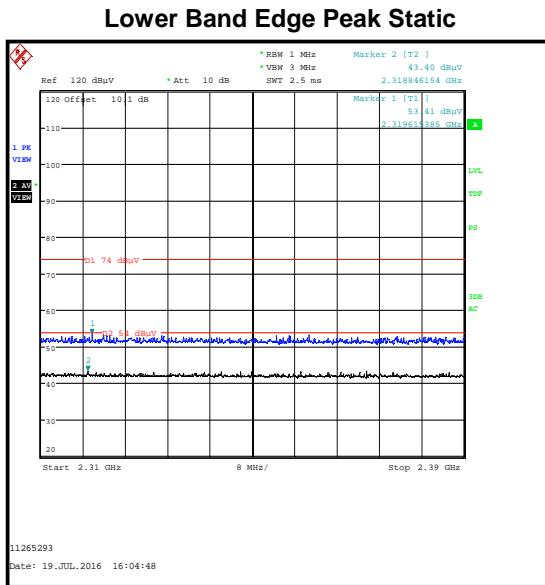
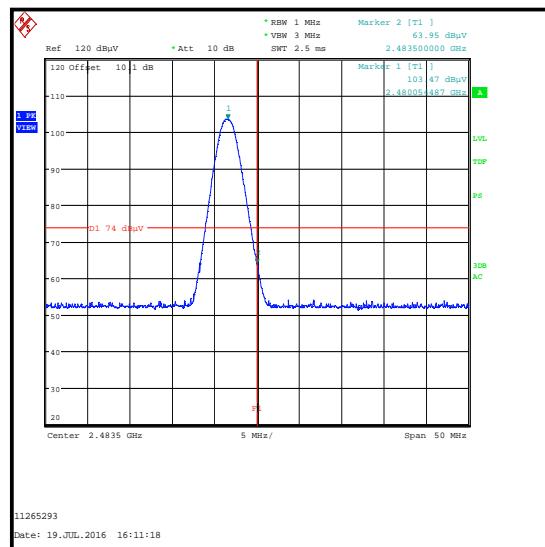
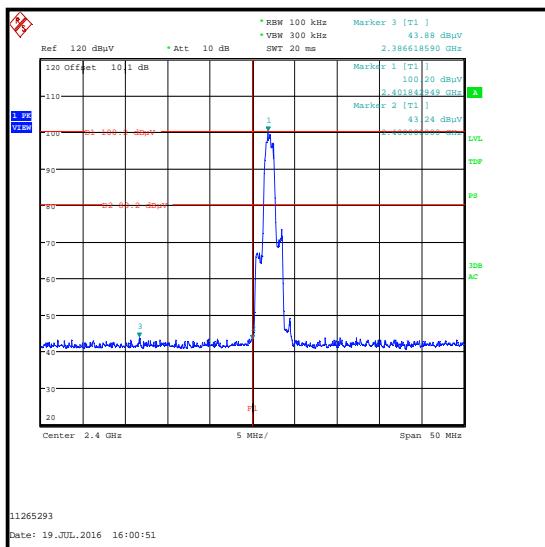
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	44.89	54.0	9.11	Complied

**Lower Band Edge Peak Hopping****Upper Band Edge Peak Hopping****2310 MHz to 2390 MHz Restricted Band Plot****Upper Band Edge Average Hopping**

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 2DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2386.6	Vertical	43.88	80.2*	36.32	Complied
2400.0	Vertical	43.24	80.2*	38.96	Complied
2483.5	Vertical	63.95	74.0	10.05	Complied

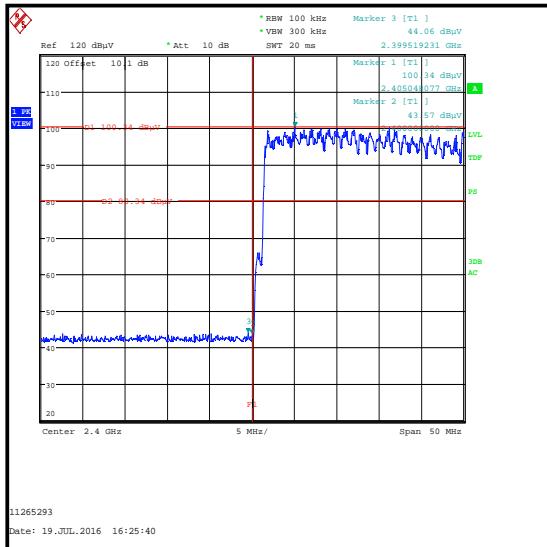
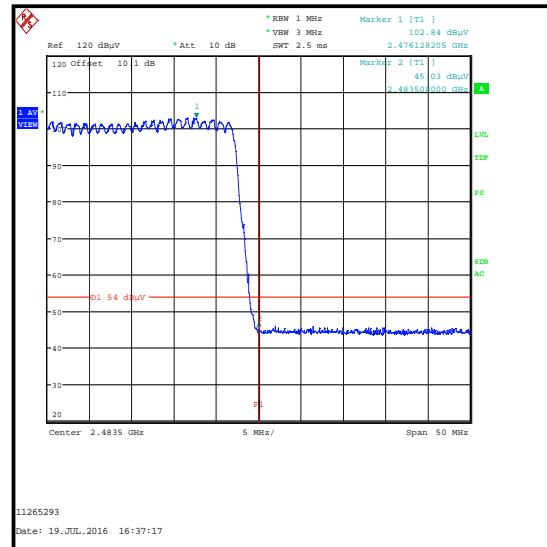
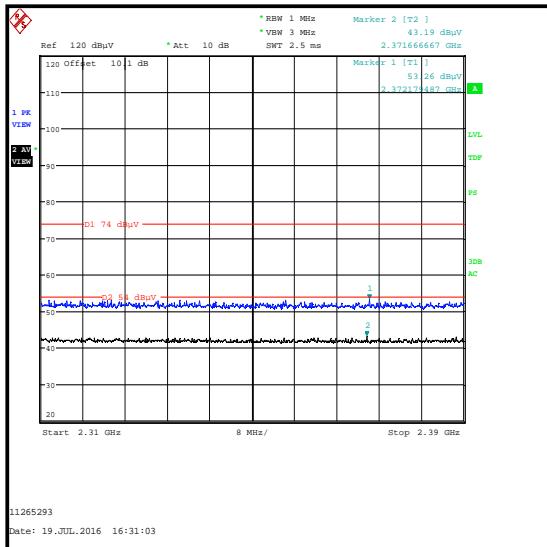
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	46.75	54.0	7.25	Complied

**2310 MHz to 2390 MHz Restricted Band Plot****Upper Band Edge Average Static**

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.5	Vertical	44.06	80.34*	36.28	Complied
2400.0	Vertical	43.57	80.34*	36.77	Complied
2483.5	Vertical	63.14	74.0	10.86	Complied

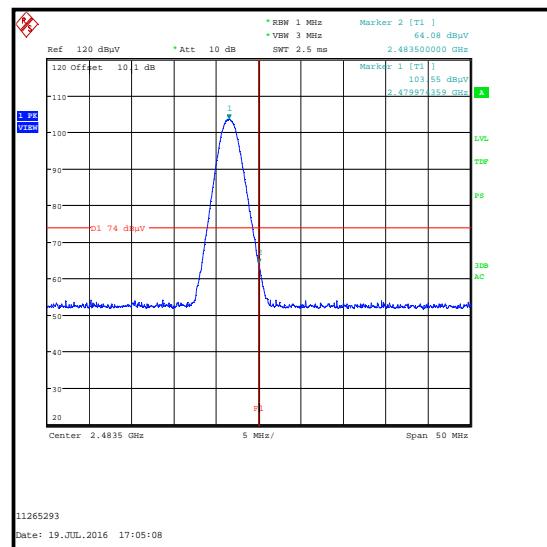
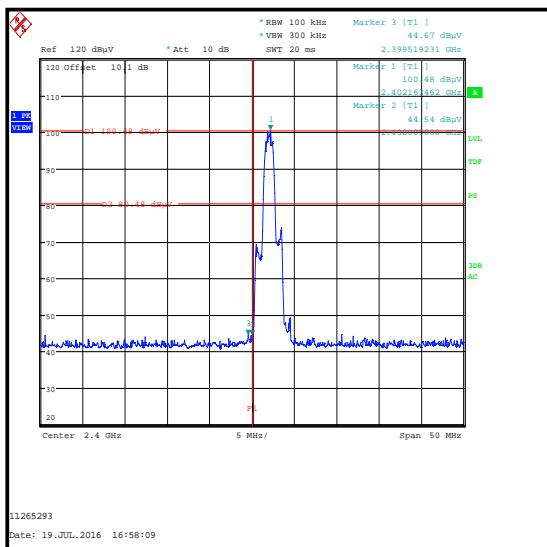
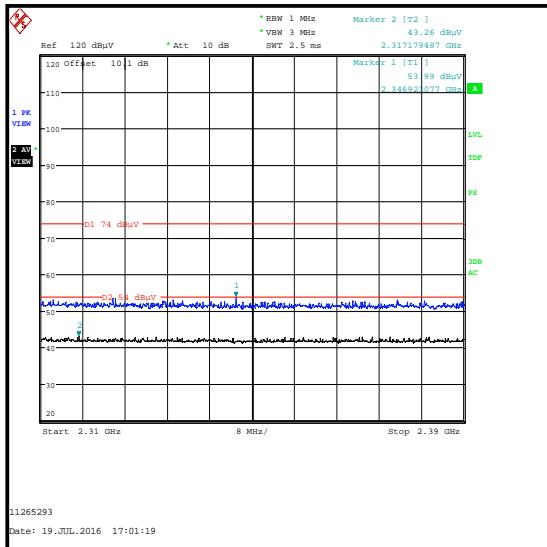
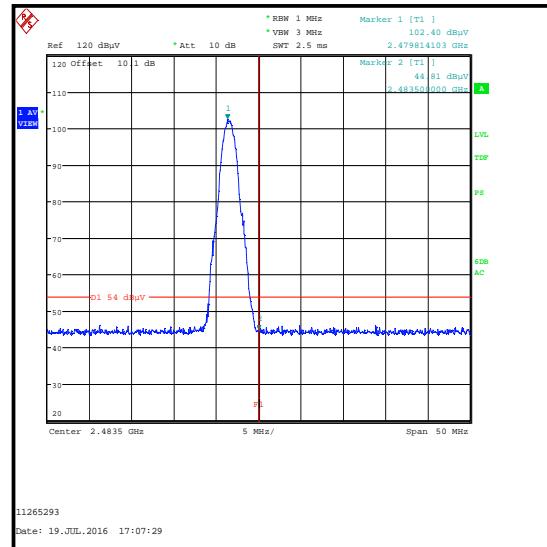
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	45.03	54.0	8.97	Complied

**Lower Band Edge Peak Hopping****2310 MHz to 2390 MHz Restricted Band Plot****Upper Band Edge Average Hopping**

Transmitter Band Edge Radiated Emissions (continued)Results: Static Mode / 3DH5

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.5	Vertical	44.67	80.48*	35.81	Complied
2400.0	Vertical	44.54	80.48*	35.94	Complied
2483.5	Vertical	64.08	74.0	9.92	Complied

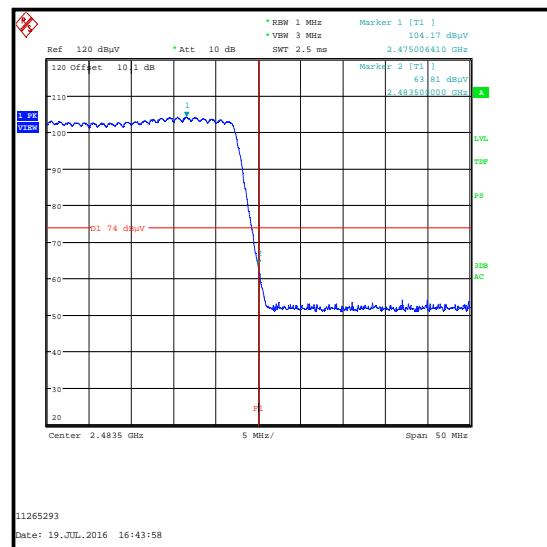
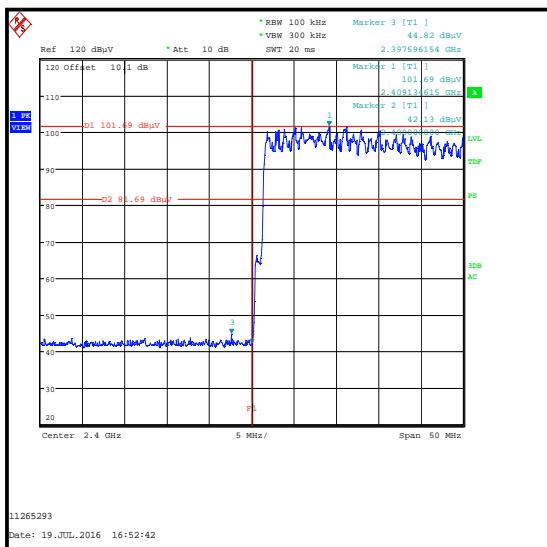
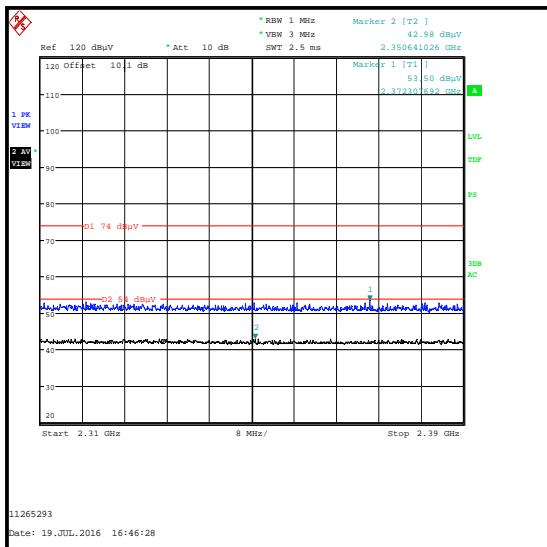
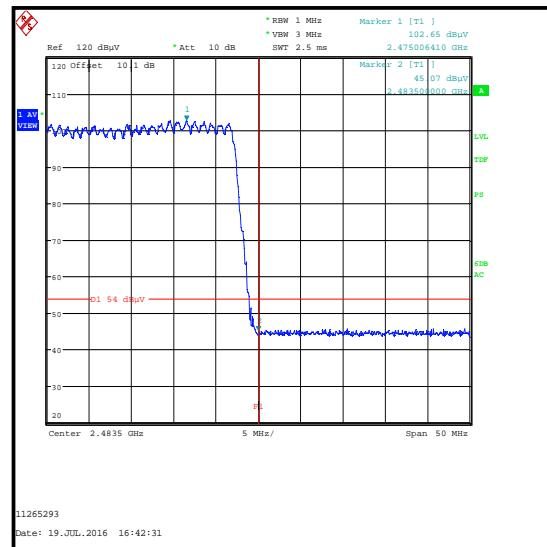
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	44.81	54.0	9.19	Complied

Lower Band Edge Peak StaticUpper Band Edge Peak Static2310 MHz to 2390 MHz Restricted Band PlotUpper Band Edge Average Static

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2397.6	Vertical	44.82	81.69*	36.87	Complied
2400.0	Vertical	42.12	81.69*	39.57	Complied
2483.5	Vertical	63.81	74.0	10.19	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	45.07	54.0	8.93	Complied

**Lower Band Edge Peak Hopping****Upper Band Edge Peak Hopping****2310 MHz to 2390 MHz Restricted Band Plot****Upper Band Edge Average Hopping**

Transmitter Band Edge Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	19 Dec 2016	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	21 Mar 2017	12
A1818	Antenna	EMCO	3115	00075692	17 Dec 2016	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	26 Apr 2017	12

5. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Carrier Frequency Separation	2.4 GHz to 2.4835 GHz	95%	±3.52 %
Average Time of Occupancy	2.4 GHz to 2.4835 GHz	95%	±3.53 ns
20 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±3.52 %
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 26.5 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

6. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version

--- END OF REPORT ---