



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-247 ISSUE 1**

**CERTIFICATION TEST REPORT**

**FOR**

**APPLE WATCH**

**MODEL NUMBER: A1758, A1817**

**FCC ID: BCG-E3105  
IC: 579C-E3105**

**REPORT NUMBER: 16U23782-E1V3**

**ISSUE DATE: AUGUST 31, 2016**

*Prepared for*  
**APPLE, INC.**  
**1 INFINITE LOOP**  
**CUPERTINO, CA 95014, U.S.A.**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**

**NVLAP**<sup>®</sup>

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08/15/2016	Initial Review	Chin Pang
V2	08/26/2016	Revised report to address TCB's questions	Tina Chu
V3	08/31/2016	Revised Section 5.5	Tina Chu

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	7
4.2. <i>SAMPLE CALCULATION .....</i>	7
4.3. <i>MEASUREMENT UNCERTAINTY .....</i>	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	8
5.2. <i>MAXIMUM OUTPUT POWER .....</i>	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	8
5.4. <i>SOFTWARE AND FIRMWARE .....</i>	8
5.5. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	9
5.6. <i>DESCRIPTION OF TEST SETUP .....</i>	10
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>14</b>
7.1. <i>ON TIME AND DUTY CYCLE .....</i>	14
7.2. <i>HIGH POWER MODE BASIC DATA RATE GFSK MODULATION .....</i>	17
7.2.1. <i>20 dB AND 99% BANDWIDTH .....</i>	17
7.2.2. <i>HOPPING FREQUENCY SEPARATION .....</i>	20
7.2.3. <i>NUMBER OF HOPPING CHANNELS .....</i>	21
7.2.4. <i>AVERAGE TIME OF OCCUPANCY .....</i>	24
7.2.5. <i>OUTPUT POWER .....</i>	28
7.2.6. <i>AVERAGE POWER .....</i>	29
7.2.7. <i>CONDUCTED SPURIOUS EMISSIONS .....</i>	30
7.3. <i>HIGH POWER MODE ENHANCED DATA RATE QPSK MODULATION .....</i>	35
7.3.1. <i>OUTPUT POWER .....</i>	35
7.3.2. <i>AVERAGE POWER .....</i>	36
7.4. <i>HIGH POWER MODE ENHANCED DATA RATE 8PSK MODULATION .....</i>	37
7.4.1. <i>20 dB AND 99% BANDWIDTH .....</i>	37
7.4.2. <i>HOPPING FREQUENCY SEPARATION .....</i>	40
7.4.3. <i>NUMBER OF HOPPING CHANNELS .....</i>	41
7.4.4. <i>AVERAGE TIME OF OCCUPANCY .....</i>	44
7.4.5. <i>OUTPUT POWER .....</i>	48
7.4.6. <i>AVERAGE POWER .....</i>	49
7.4.7. <i>CONDUCTED SPURIOUS EMISSIONS .....</i>	50
7.5. <i>LOW POWER MODE BASIC DATA RATE GFSK MODULATION .....</i>	55
7.5.1. <i>20 dB AND 99% BANDWIDTH .....</i>	55
7.5.2. <i>HOPPING FREQUENCY SEPARATION .....</i>	58

7.5.3. NUMBER OF HOPPING CHANNELS.....	59
7.5.4. AVERAGE TIME OF OCCUPANCY .....	62
7.5.5. OUTPUT POWER .....	67
7.5.6. AVERAGE POWER .....	68
7.5.7. CONDUCTED SPURIOUS EMISSIONS.....	69
 7.6. <i>LOW POWER MODE ENHANCED DATA RATE QPSK MODULATION</i> .....	74
7.6.1. OUTPUT POWER .....	74
7.6.2. AVERAGE POWER.....	75
 7.7. <i>LOW POWER MODE ENHANCED DATA RATE 8PSK MODULATION</i> .....	76
7.7.1. 20 dB AND 99% BANDWIDTH .....	76
7.7.2. HOPPING FREQUENCY SEPARATION .....	79
7.7.3. NUMBER OF HOPPING CHANNELS.....	80
7.7.4. AVERAGE TIME OF OCCUPANCY .....	83
7.7.5. OUTPUT POWER .....	87
7.7.6. AVERAGE POWER .....	88
7.7.7. CONDUCTED SPURIOUS EMISSIONS.....	89
 8. RADIATED TEST RESULTS.....	94
8.1. <i>LIMITS AND PROCEDURE</i> .....	94
8.2. <i>TRANSMITTER ABOVE 1 GHz</i> .....	95
8.2.1. HIGH POWER MODE BASIC DATA RATE GFSK MODULATION .....	95
8.2.2. HIGH POWER MODE ENHANCED DATA RATE 8PSK MODULATION.....	105
8.2.3. LOW POWER MODE BASIC DATA RATE GFSK MODULATION .....	115
8.2.4. LOW POWER MODE ENHANCED DATA RATE 8PSK MODULATION .....	125
8.3. <i>WORST-CASE BELOW 1 GHz</i> .....	135
8.4. <i>WORST-CASE ABOVE 18 GHz</i> .....	137
 9. AC POWER LINE CONDUCTED EMISSIONS.....	139
 10. SETUP PHOTOS .....	140

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** APPLE WATCH

**MODEL:** A1758, A1817

**SERIAL NUMBER:** FH7RN01HHDNC

**DATE TESTED:** JUNE 29 – AUGUST 13, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Prepared By:

*Mengistu Mekuria*

---

MENGISTU MEKURIA  
SENIOR ENGINEER  
UL VERIFICATION SERVICES INC.

---

*Kelvin Huynh*  
KELVIN HUYNH  
EMC ENGINEER  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input checked="" type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an Apple Watch with WLAN, Bluetooth, NFC support and GPS Radio.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	17.91	61.80
2402 - 2480	DQPSK	17.35	54.33
2402 - 2480	Enhanced 8PSK	17.28	53.46

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)
2.4	-10.70

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 14S310.

## 5.5. WORST-CASE CONFIGURATION AND MODE

EUT has 3 types of enclosures and various kinds of metallic and non-metallic wristbands. There are 2 types of metallic bands; Metal Links, and Metal Mesh. The worst-case configuration was investigated within these combinations charging with/without wireless charger by AC/DC adapter and it was determined that EUT with aluminum enclosure and wristband charging with wireless charger by AC/DC adapter was the worst-case; therefore, all final radiated testing was performed with this configuration. There is no significant difference among various kinds of wristbands.

Radiated emission below 1G and above 18G was set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that X-Flatbed orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X-Flatbed orientation.

Worst-case data rates were:

GFSK mode: DH5

8PSK mode: 3-DH5

DQPSK mode has been verified to have the lowest power.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Lenovo	92P1160	11S92P1160Z1ZBGH798B12	N/A
Laptop	Lenovo	7659	L3-AL664 08/03	N/A
Wireless Charger	Apple	A1768	DLC616200ZYHE1Y835	BCGA1768
AC/DC adapter	Apple	A1385	D293154U2DTDHLHCW	N/A
Test jig	Apple	-	604-07510-09	N/A

### I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB to mini USB	Shielded	1	To laptop and fixture


### I/O CABLES (BELOW AND ABOVE 1G RADIATED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Un-Shielded	2	To AC/DC adapter

### TEST SETUP- CONDUCTED PORT

The EUT was placed in a test jig and test jig connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


### SETUP DIAGRAM

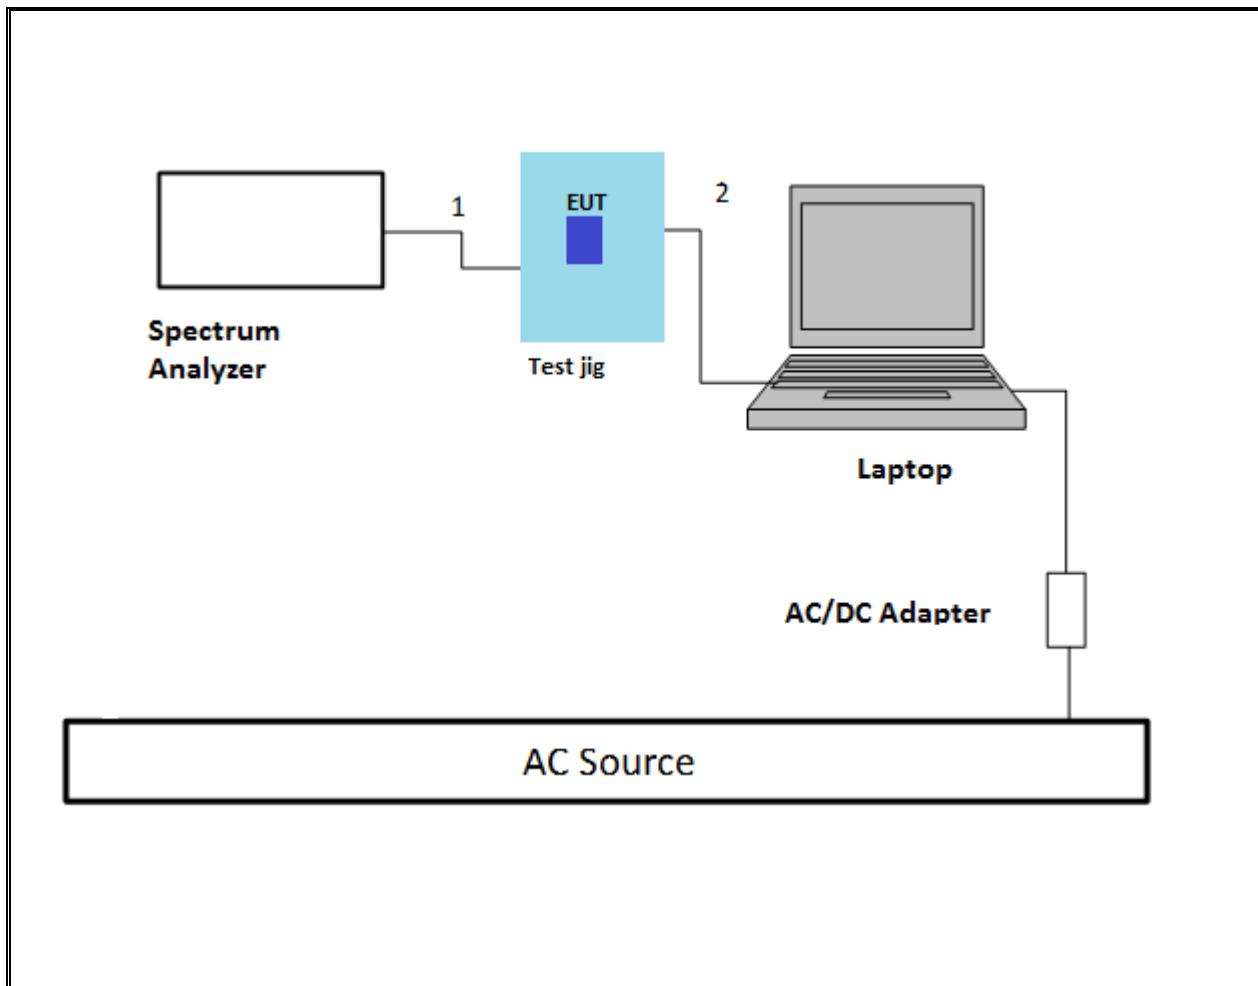

### TEST SETUP- BELOW AND ABOVE 1GHZ TESTS

EUT was powered by battery and charged by AC/DC adapter via USB cable with wireless charger. Test software exercised the EUT.

### SETUP DIAGRAM

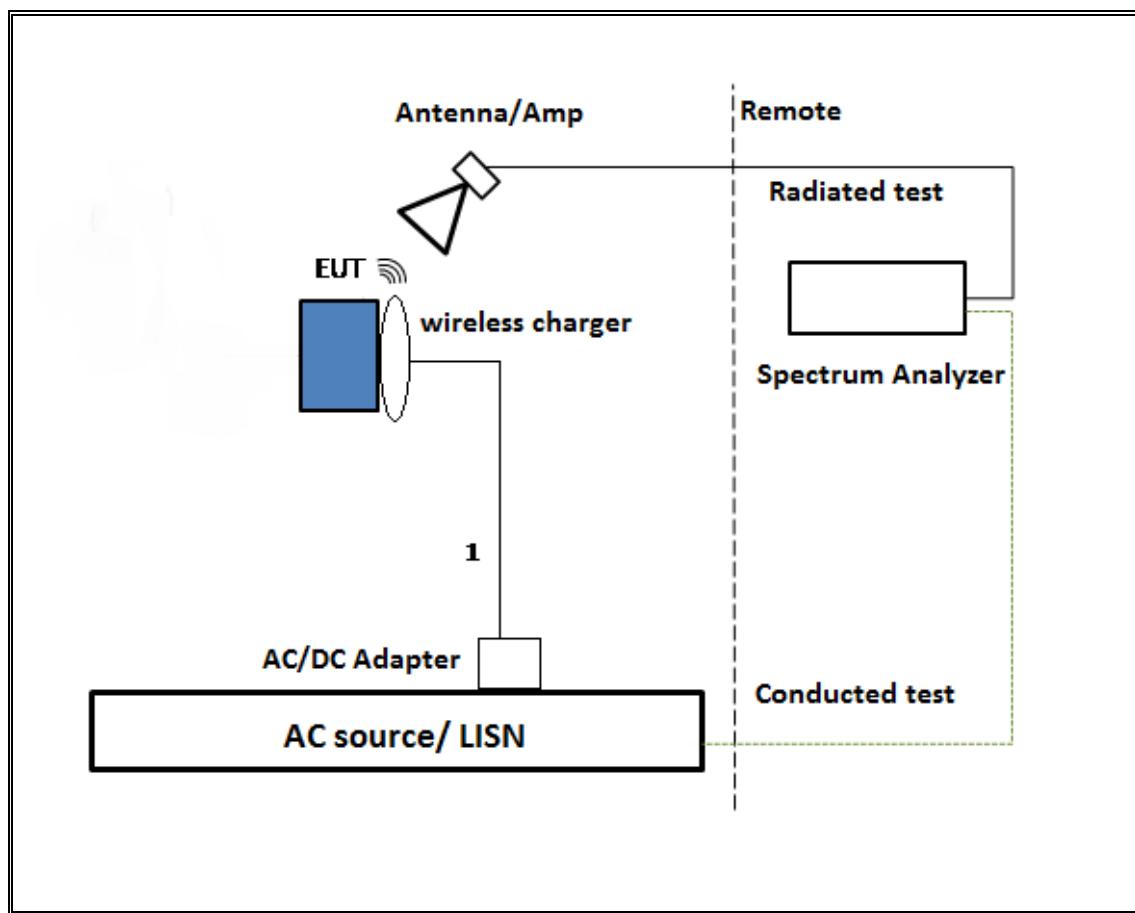

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	T Number	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T120	4/5/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T122	1/29/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T173	6/17/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	T341	10/14/2016
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	4/18/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	5/26/2017
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T491	5/31/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	6/17/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	T905	6/21/2017
***Power Meter, P-series single channel	Agilent	N1911A	T1271	7/8/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	6/20/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	T447	6/16/2017
**Spectrum Analyzer, 40 GHz	Agilent	8564E	T106	8/13/2016
***Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	7/5/2017
UL SOFTWARE				
* Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015	
* Conducted Software	UL	UL EMC	Ver 4.0, January 11, 2016	

Note: \* indicates automation software version used in the compliance certification testing

\*\* Equipment was used before calibration due date.

\*\*\*Equipment was used after calibration.

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

##### HIGH POWER MODE



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
Bluetooth GFSK	10.000	10.000	1.000	100.00%	0.00	0.010
Bluetooth 8PSK	10.000	10.000	1.000	100.00%	0.00	0.010



##### LOW POWER MODE

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
Bluetooth GFSK	10.000	10.000	1.000	100.00%	0.00	0.010
Bluetooth 8PSK	10.000	10.000	1.000	100.00%	0.00	0.010

## DUTY CYCLE PLOTS

### HOPPING OFF

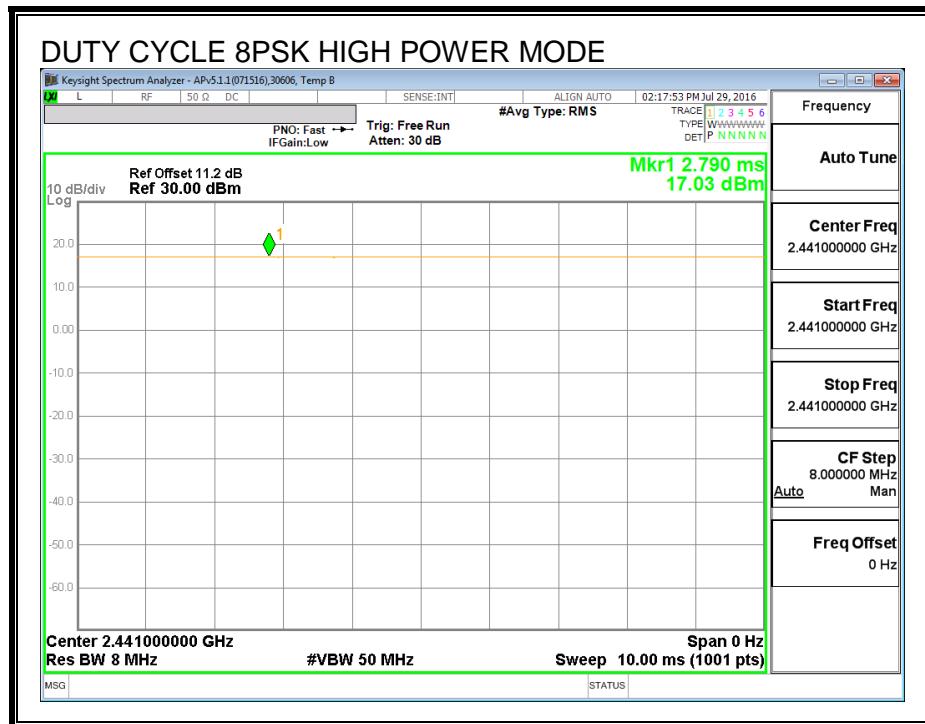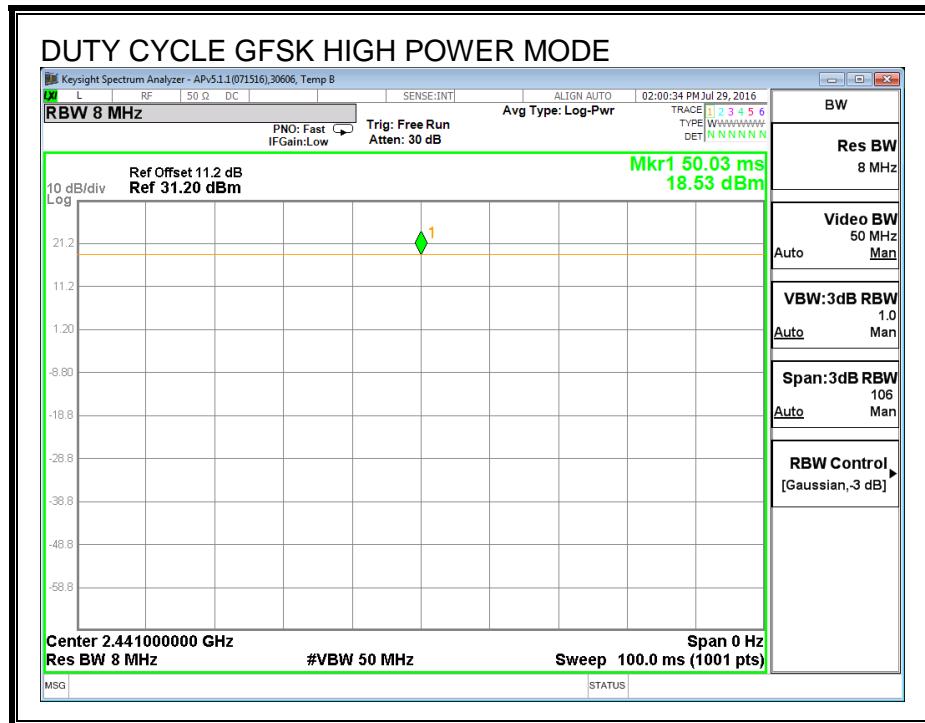

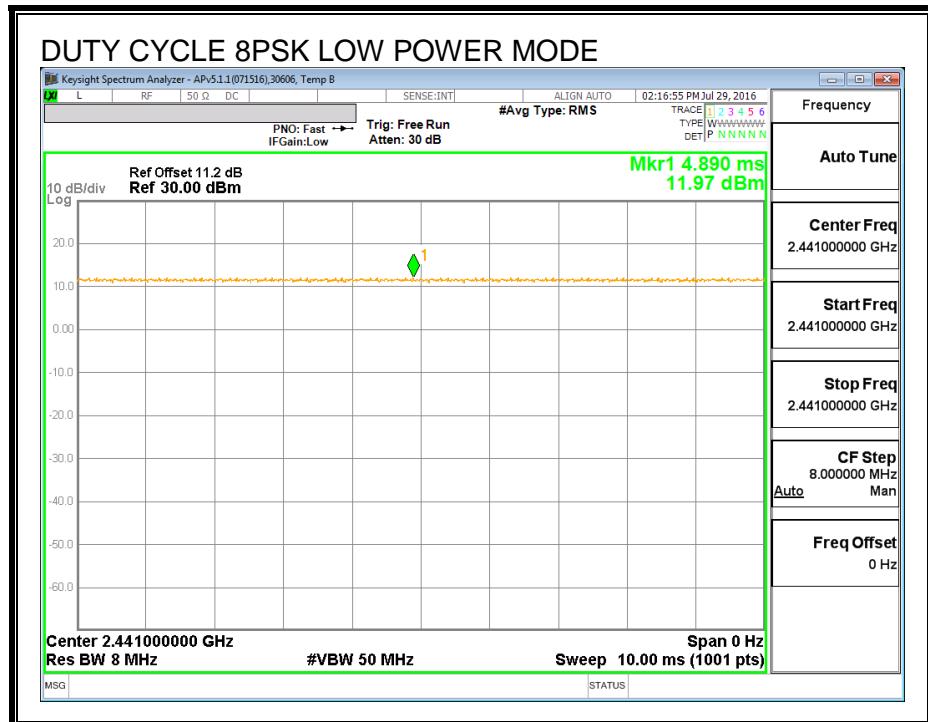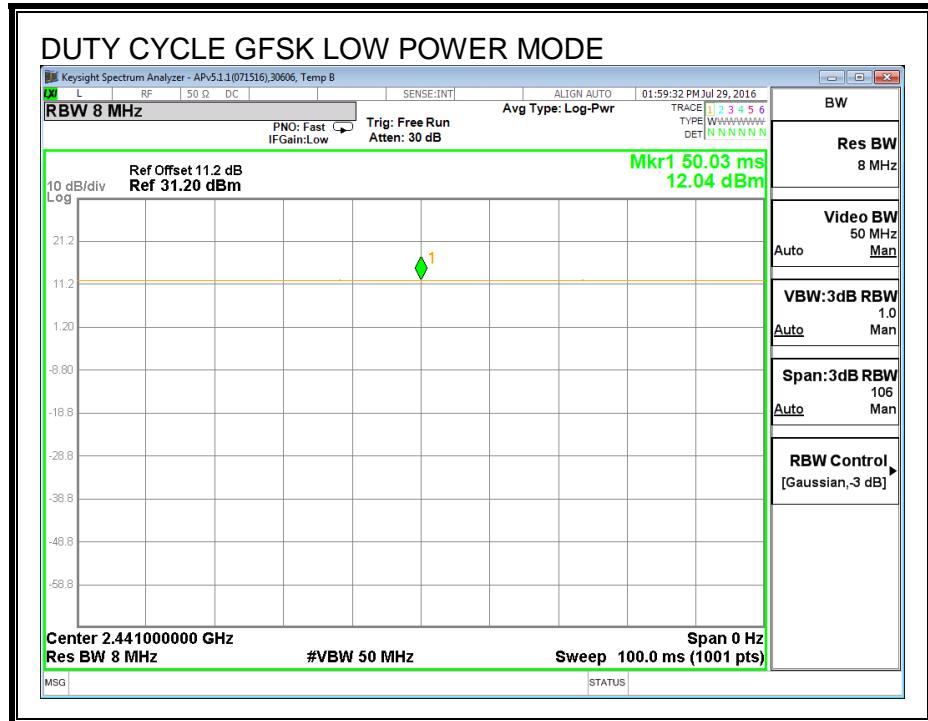

## 7.2. HIGH POWER MODE BASIC DATA RATE GFSK MODULATION

### 7.2.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	853.0	868.5
Middle	2441	907.5	880.1
High	2480	899.9	878.2

## 20 dB AND 99% BANDWIDTH

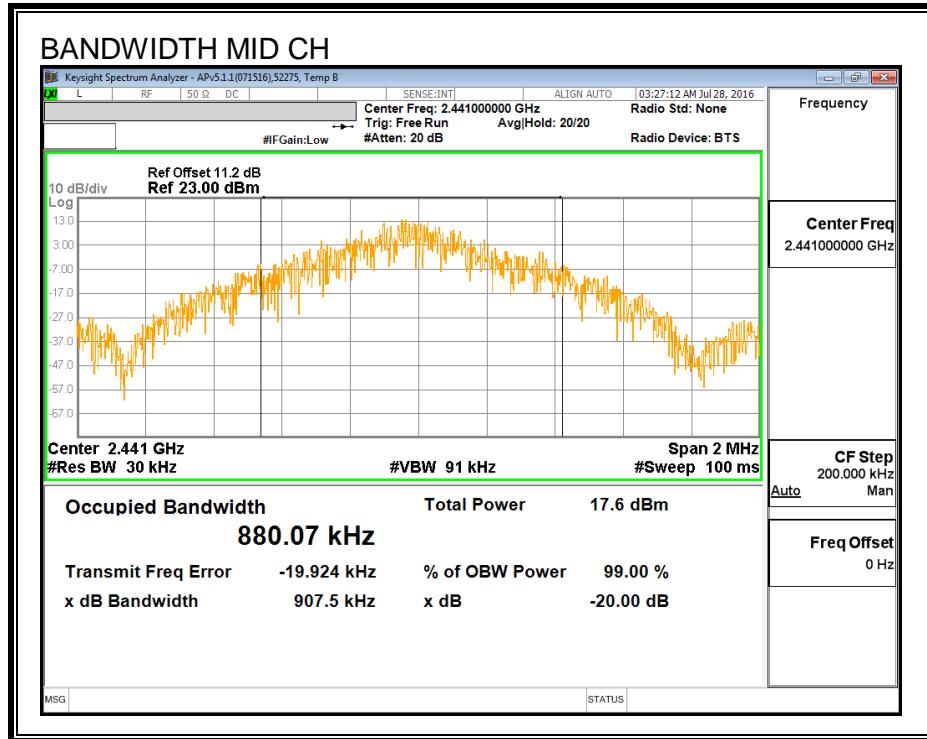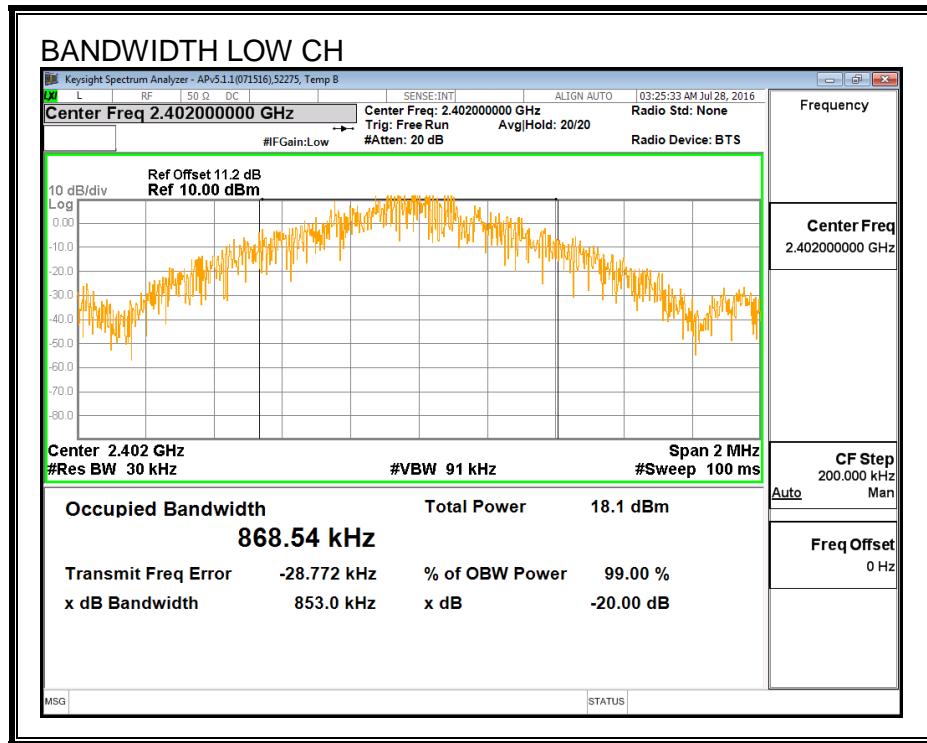

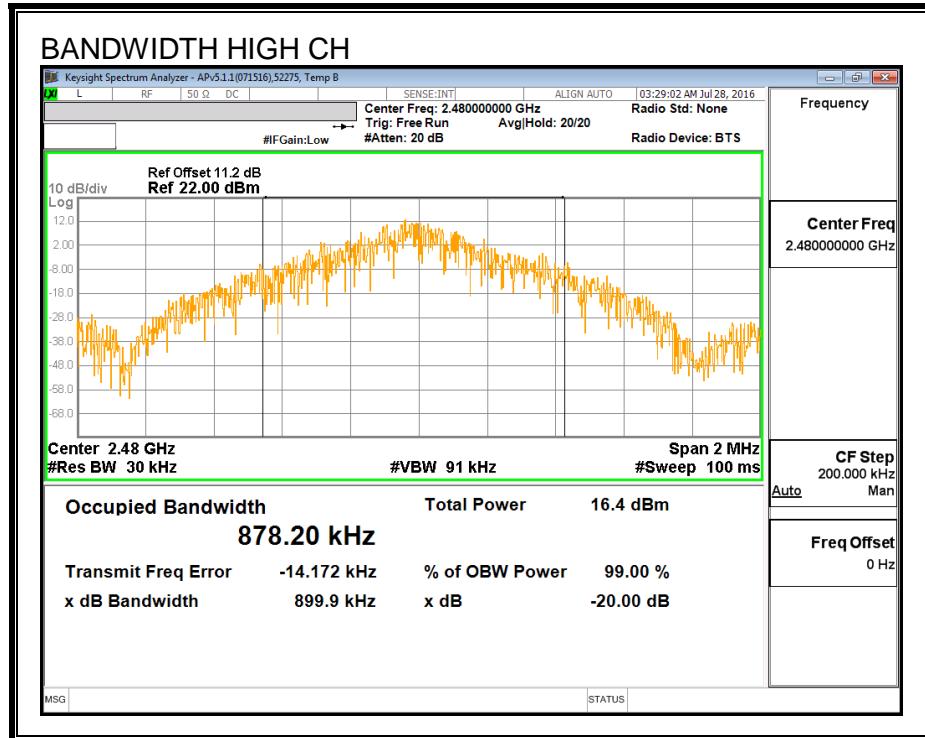

## 7.2.2. HOPPING FREQUENCY SEPARATION

### LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

### RESULTS

#### HOPPING FREQUENCY SEPARATION

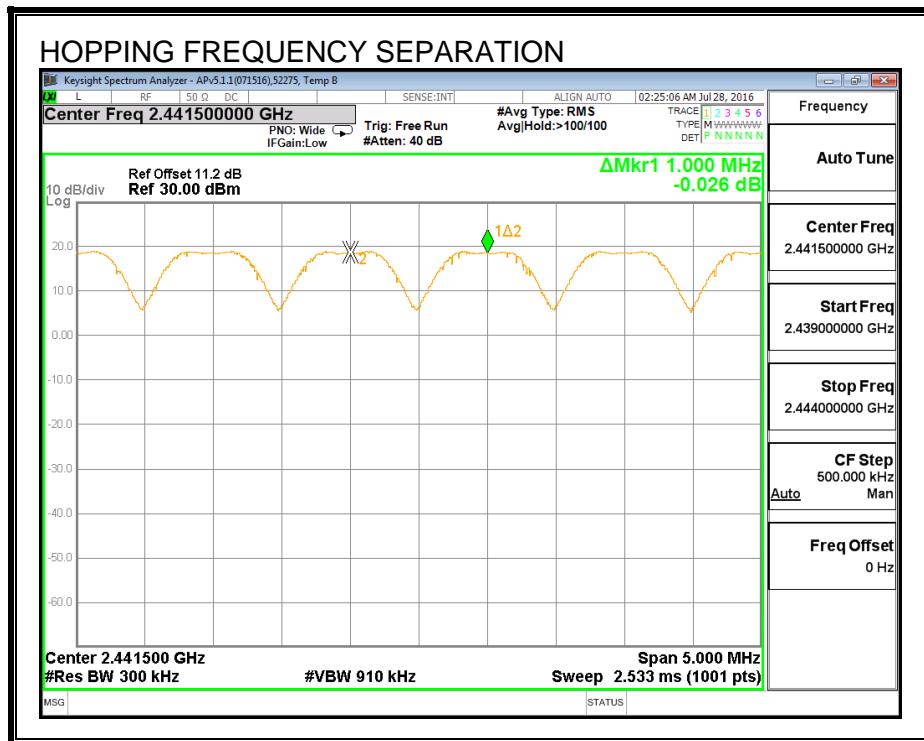

### 7.2.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

Normal Mode: 79 Channels observed.

## NUMBER OF HOPPING CHANNELS

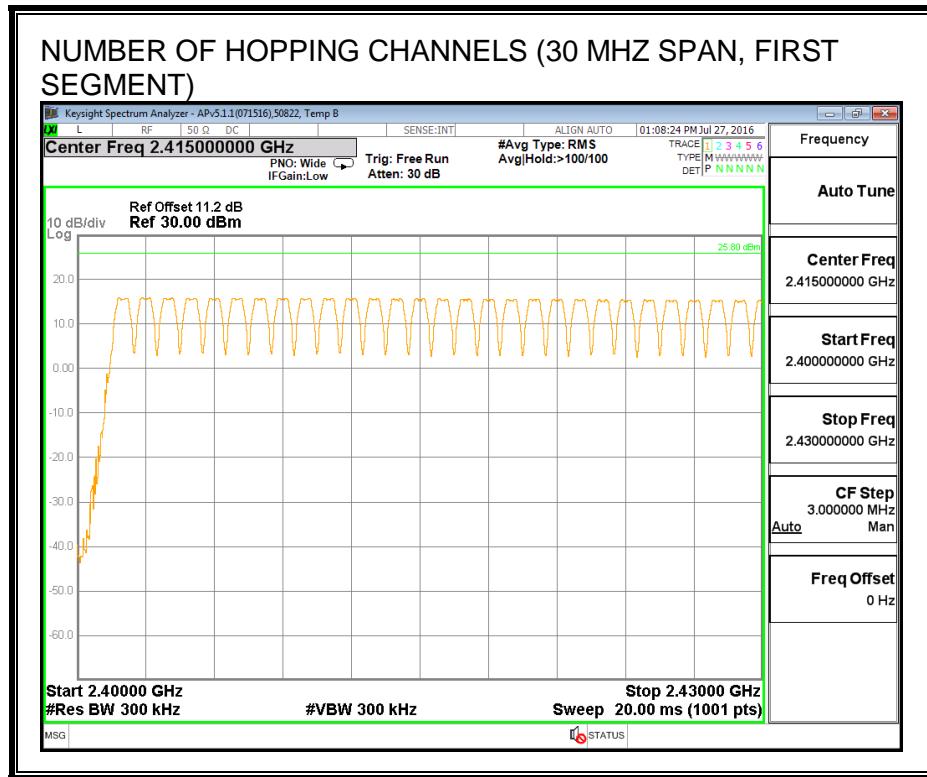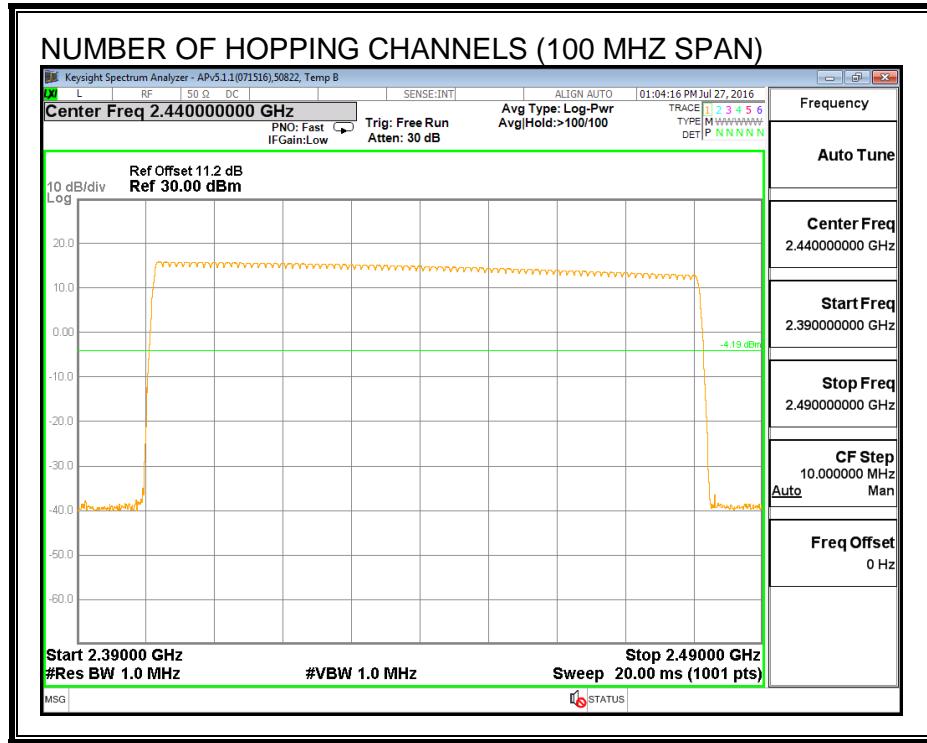

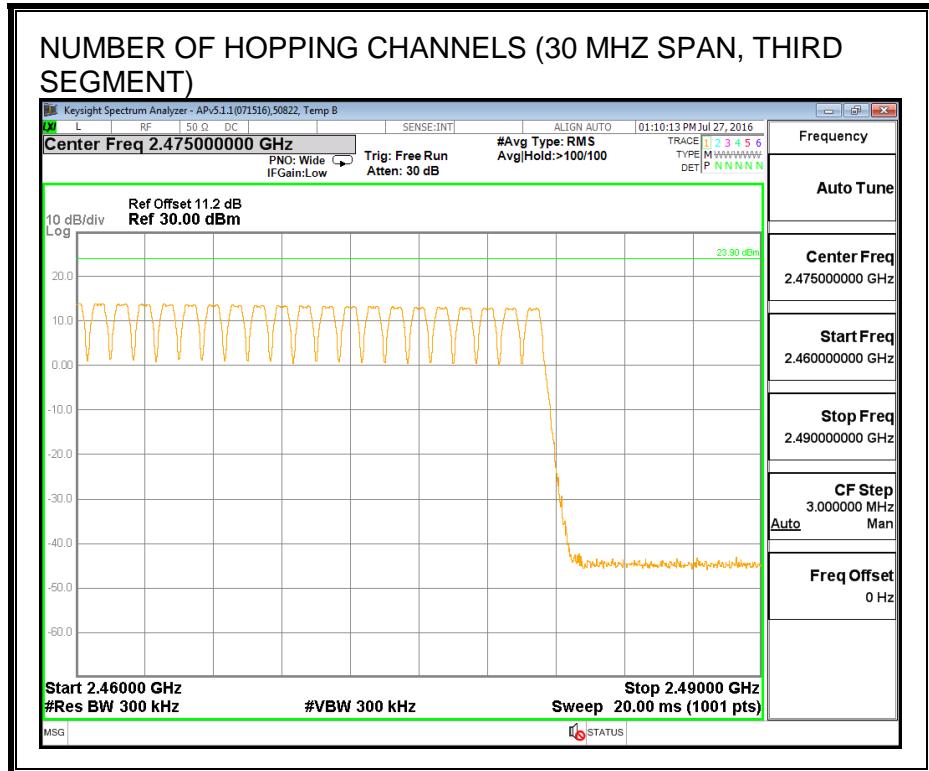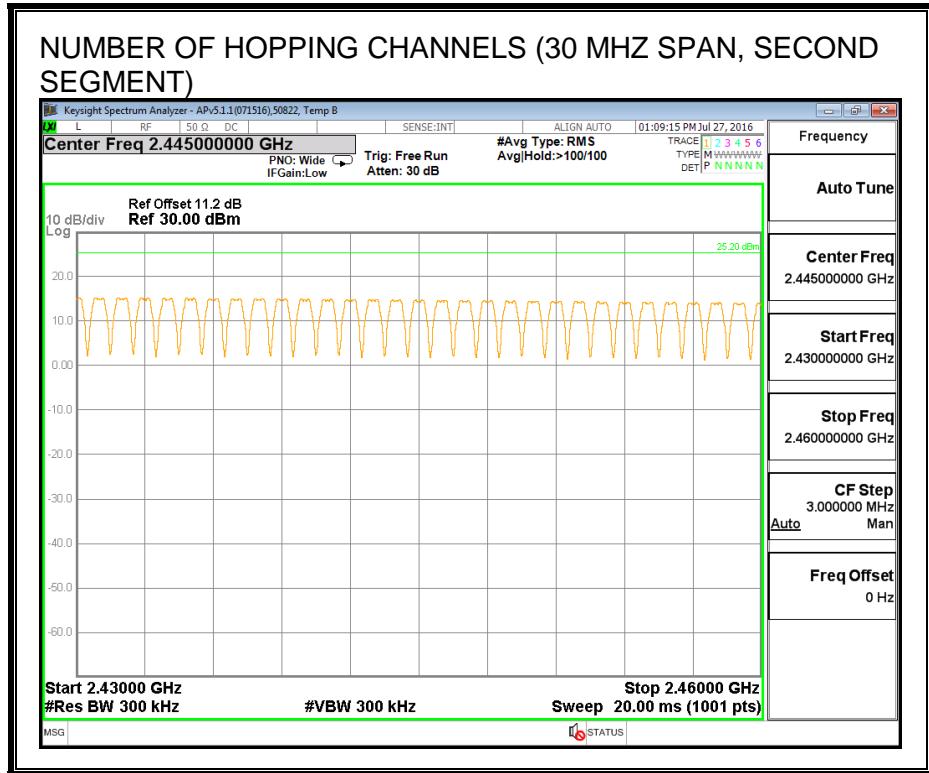

## 7.2.4. AVERAGE TIME OF OCCUPANCY

### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$ .


### RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK Normal Mode</b>					
DH1	0.385	32	0.123	0.4	-0.277
DH3	1.654	17	0.281	0.4	-0.119
DH5	2.888	13	0.375	0.4	-0.025
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK AFH Mode</b>					
DH1	0.385	8	0.031	0.4	-0.369
DH3	1.654	4.25	0.070	0.4	-0.330
DH5	2.888	3.25	0.094	0.4	-0.306


## PULSE WIDTH - DH1




## NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

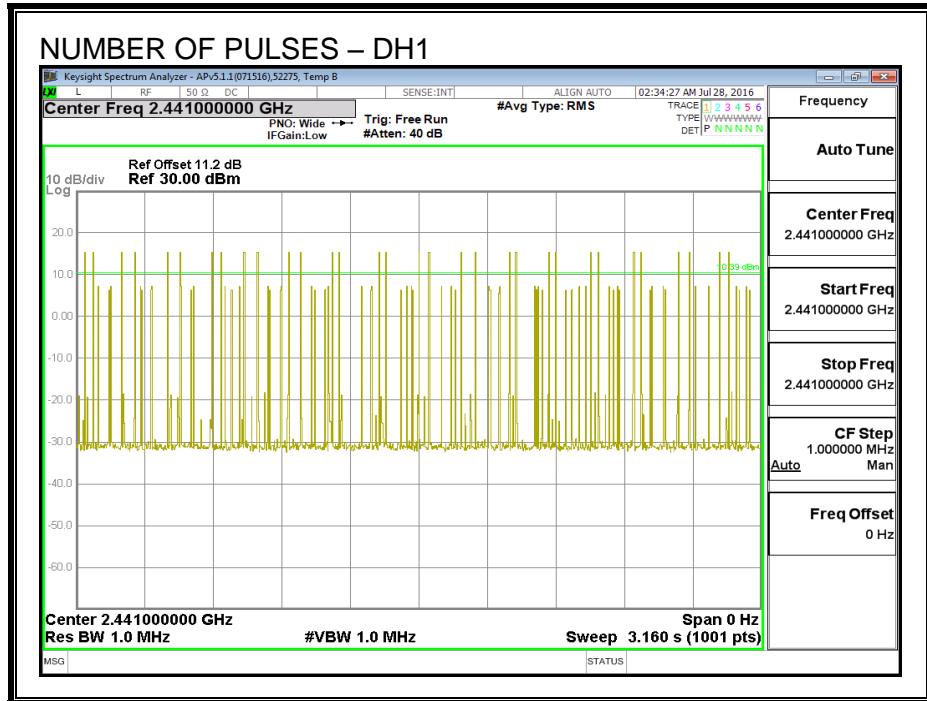


## PULSE WIDTH – DH3

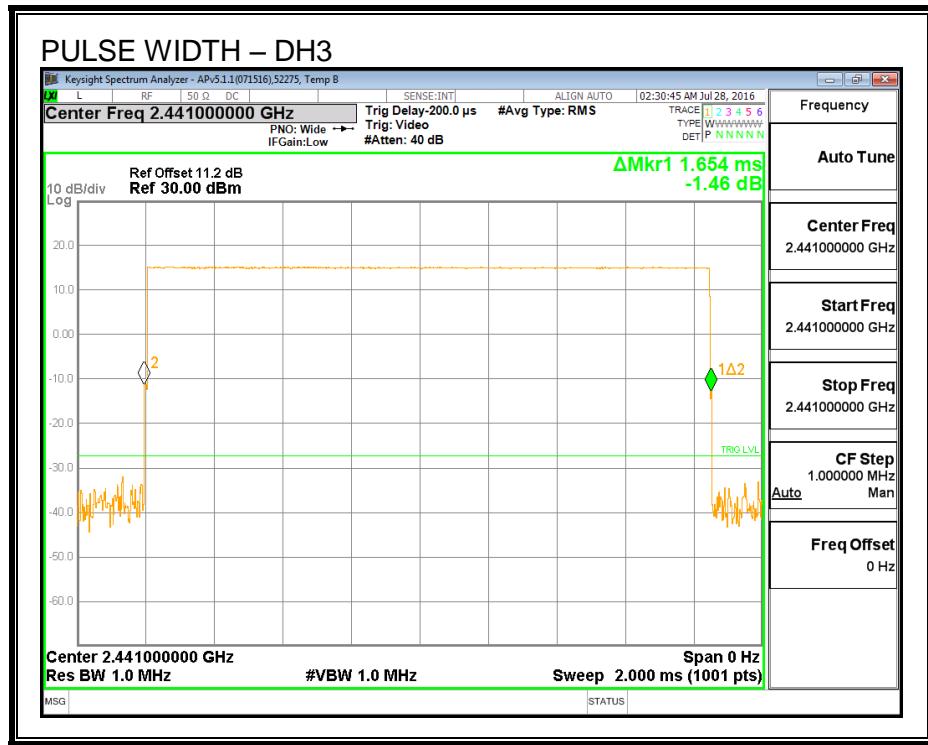


## NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

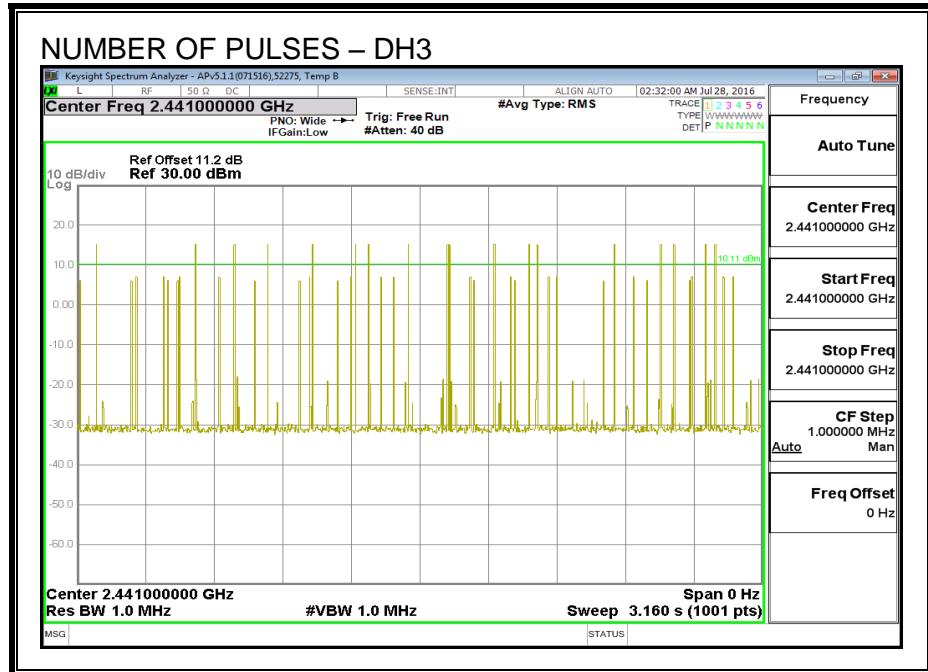

## PULSE WIDTH – DH5

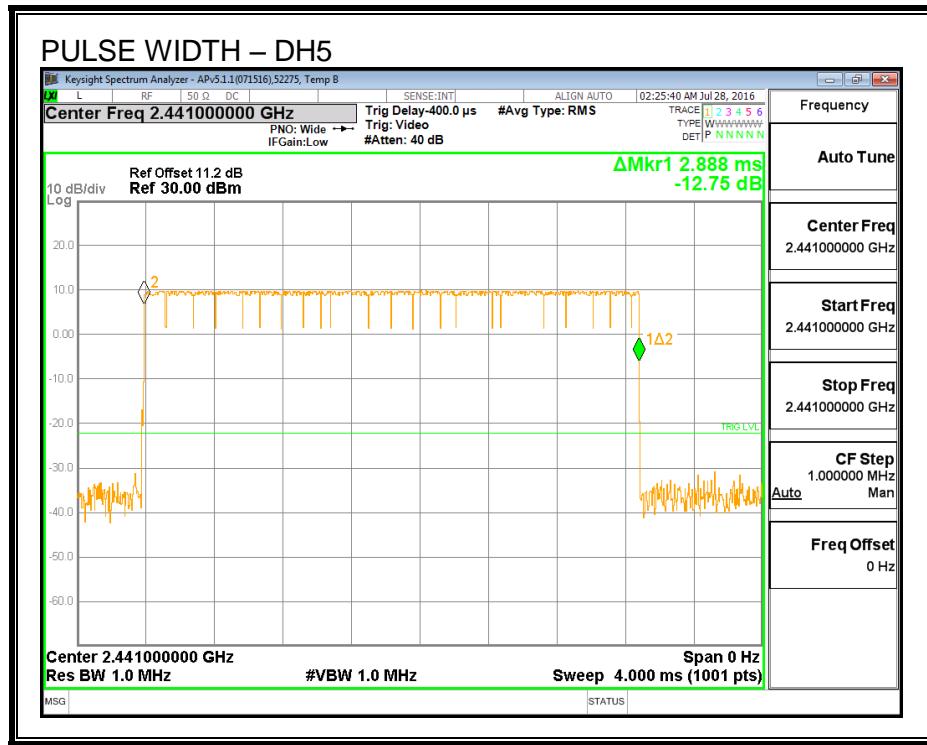

## NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

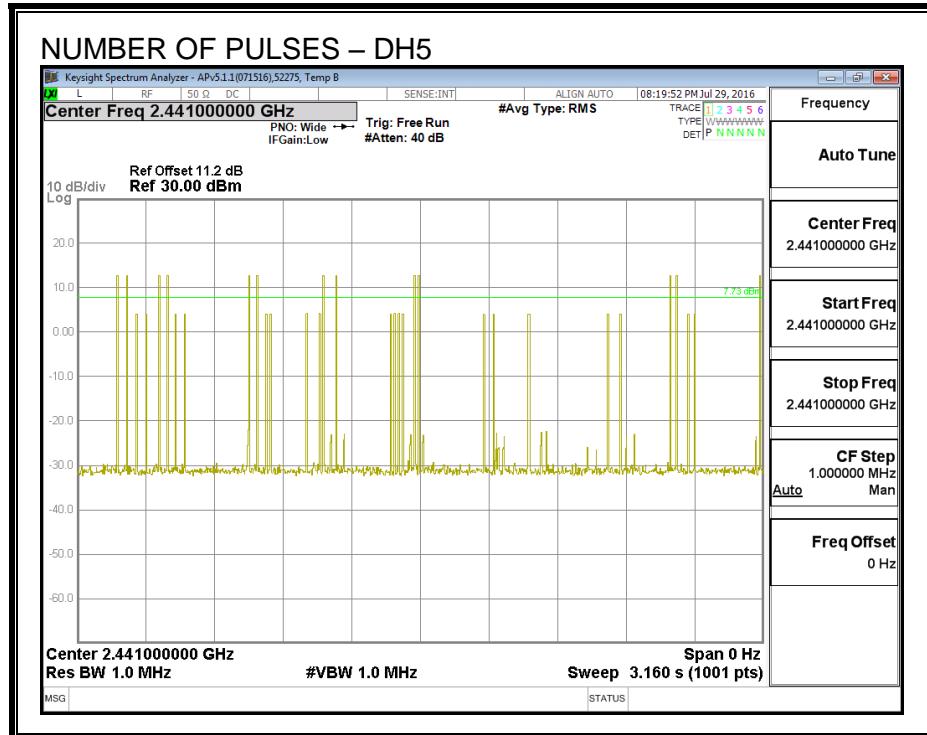

## 7.2.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

### TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

### RESULTS

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.86	30	-12.14
Middle	2441	17.91	30	-12.09
High	2480	17.73	30	-12.27

## 7.2.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power (dBm)</b>
Low	2402	17.41
Middle	2441	17.50
High	2480	17.28

## 7.2.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### RESULTS



**SPURIOUS EMISSIONS, LOW CHANNEL**

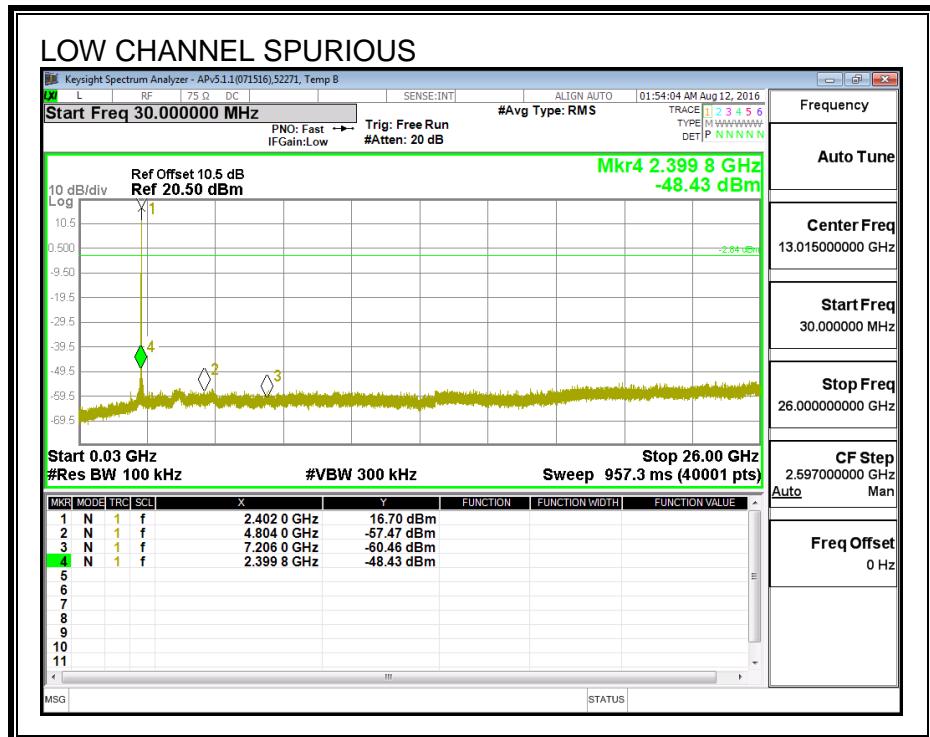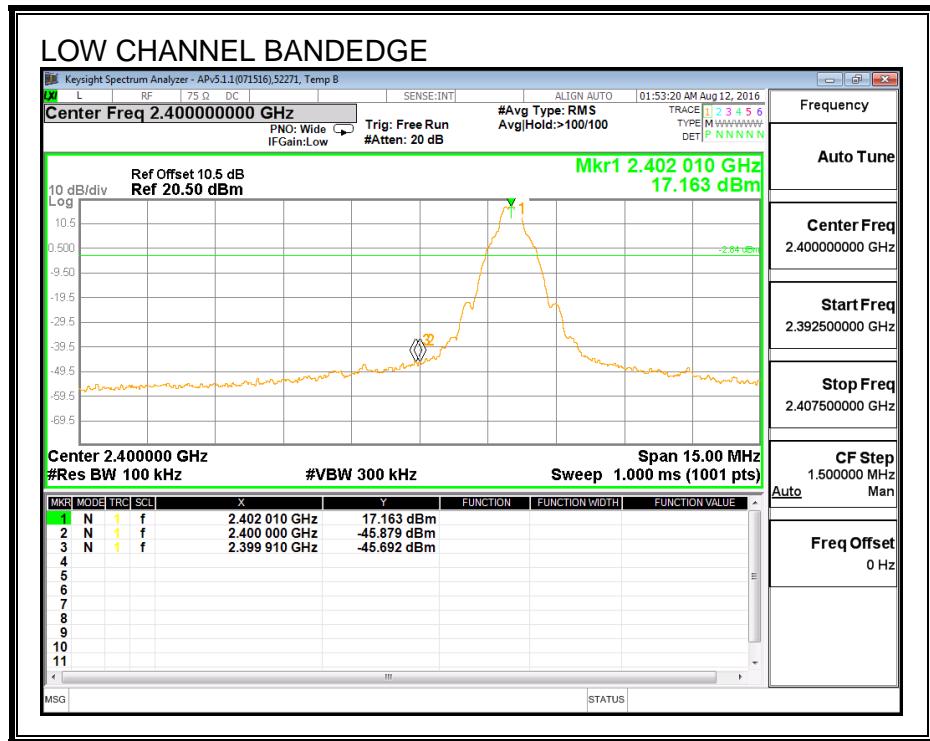



## SPURIOUS EMISSIONS, MID CHANNEL

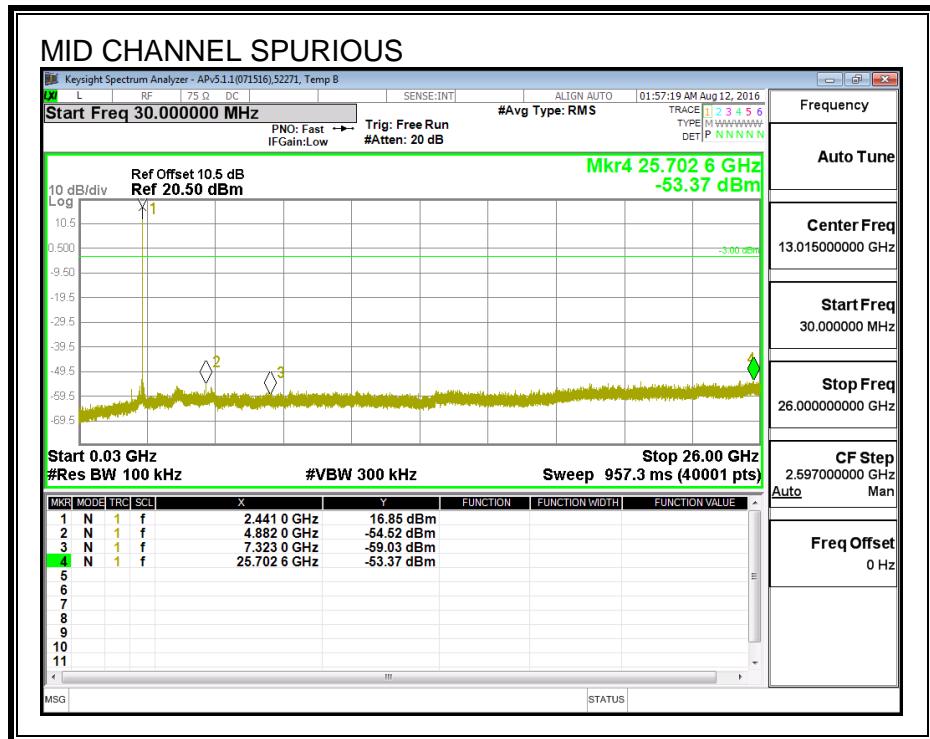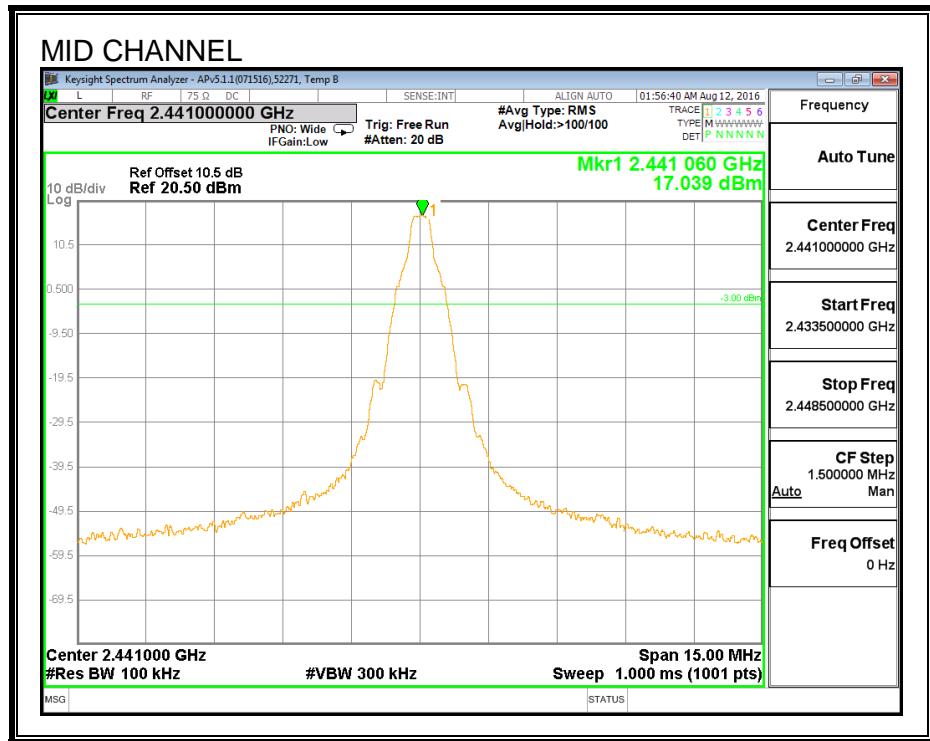

## SPURIOUS EMISSIONS, HIGH CHANNEL

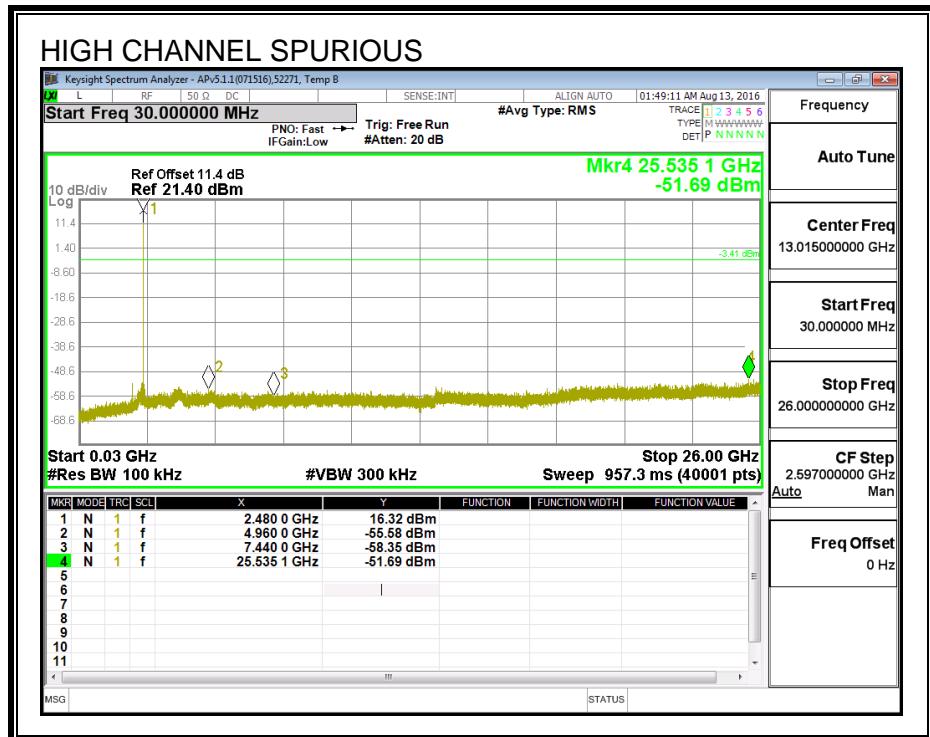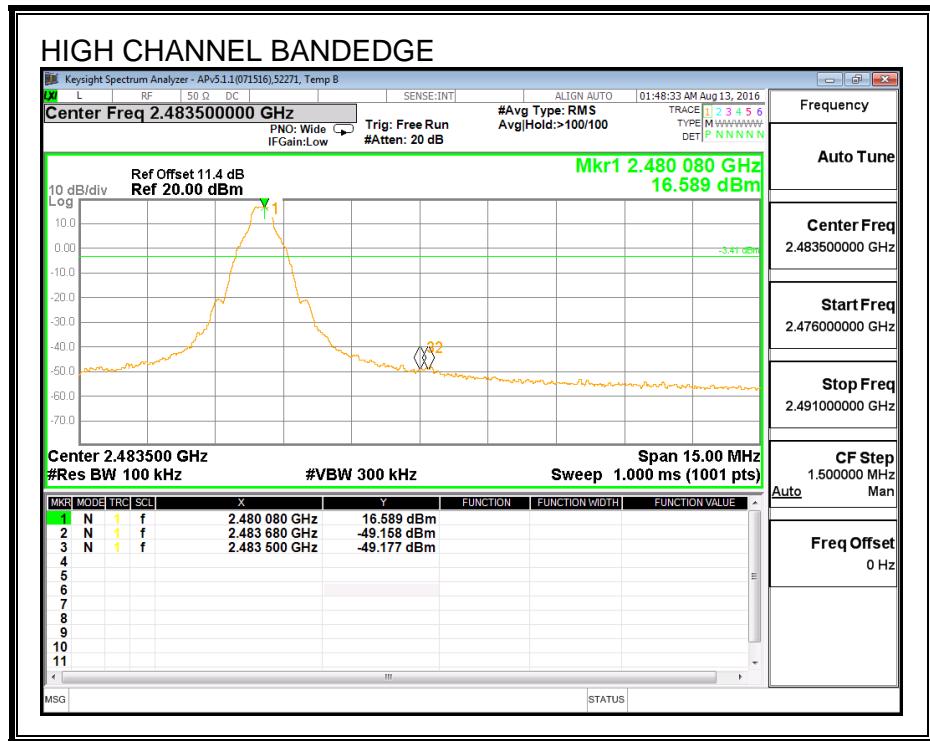

## SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

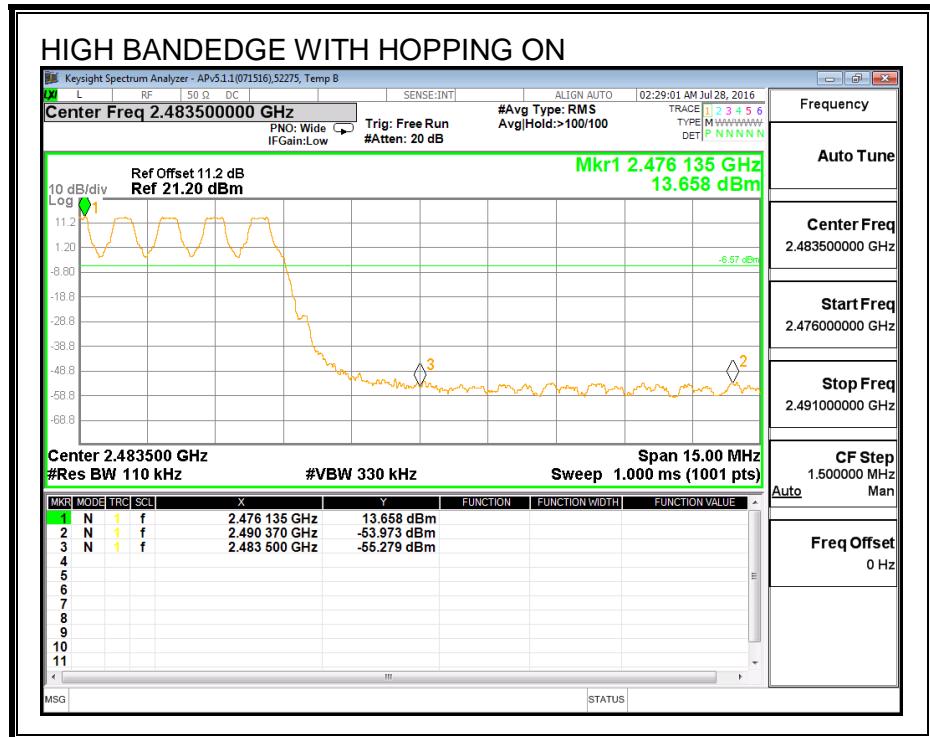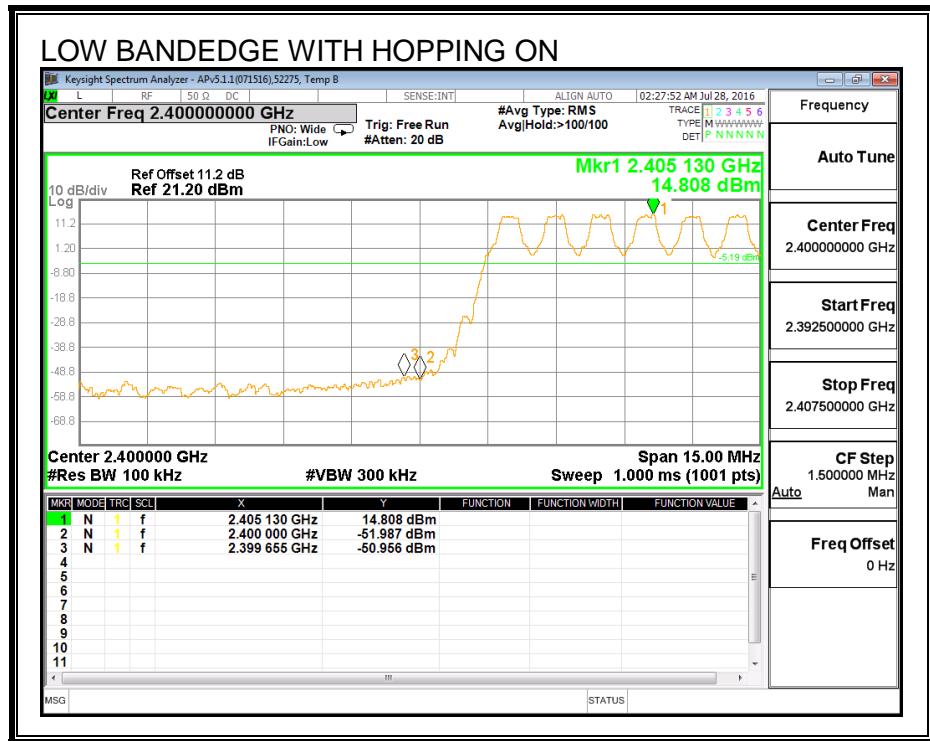

## 7.3. HIGH POWER MODE ENHANCED DATA RATE QPSK MODULATION

### 7.3.1. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.35	21	-3.62
Middle	2441	17.33	21	-3.64
High	2480	16.99	21	-3.98

### 7.3.2. AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	13.87
Middle	2441	13.96
High	2480	13.71

## 7.4. HIGH POWER MODE ENHANCED DATA RATE 8PSK MODULATION

### 7.4.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.330	1.214
Middle	2441	1.306	1.228
High	2480	1.324	1.226

## 20 dB AND 99% BANDWIDTH

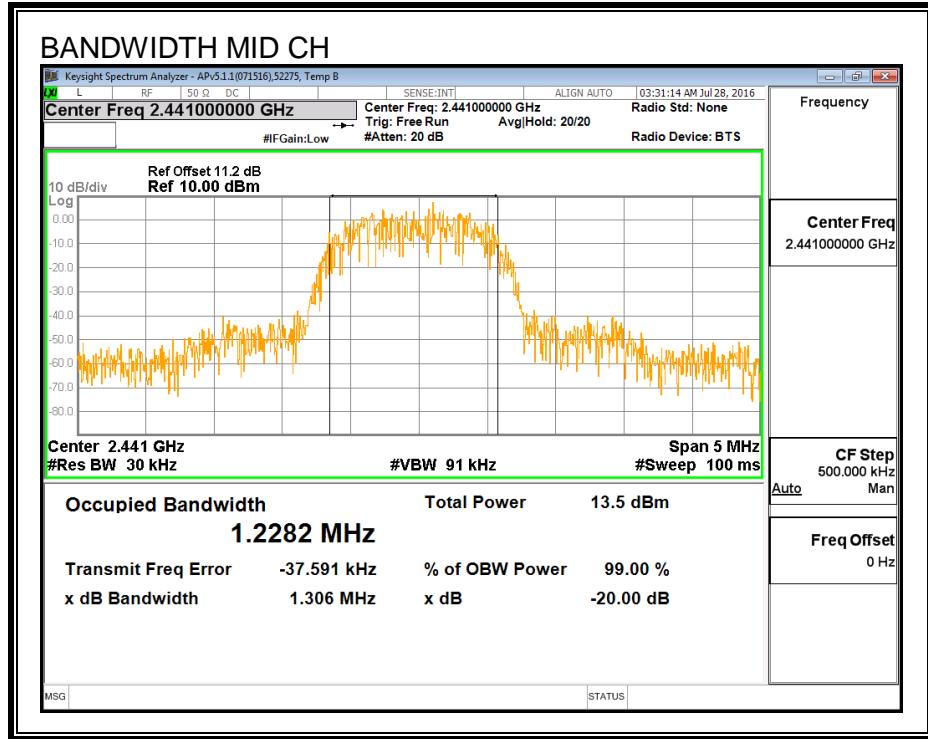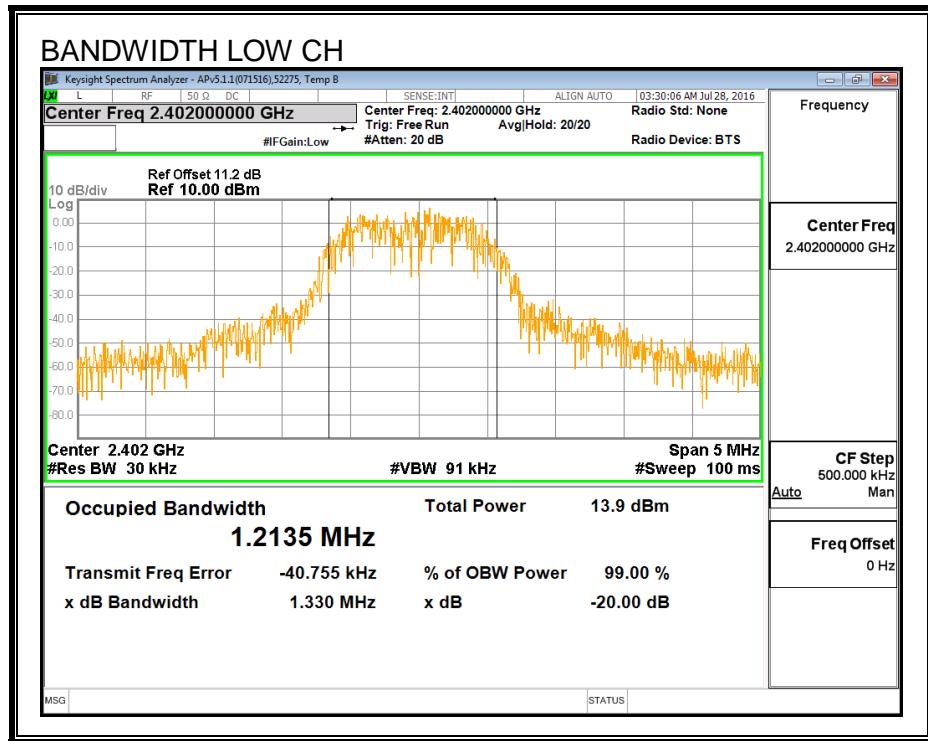

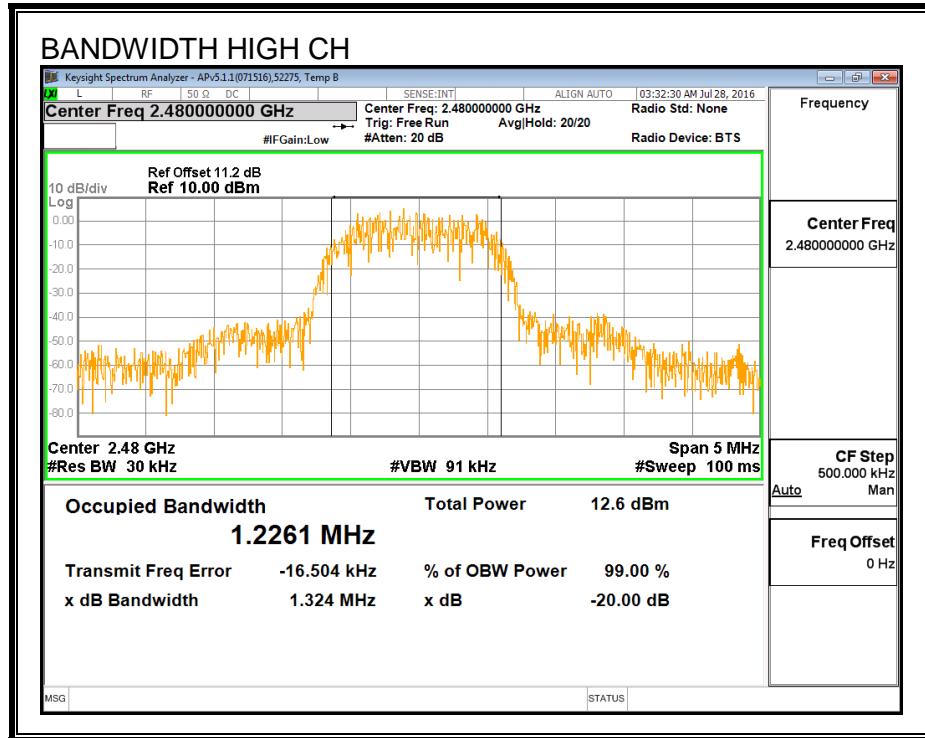

## 7.4.2. HOPPING FREQUENCY SEPARATION

### LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

### RESULTS

#### HOPPING FREQUENCY SEPARATION

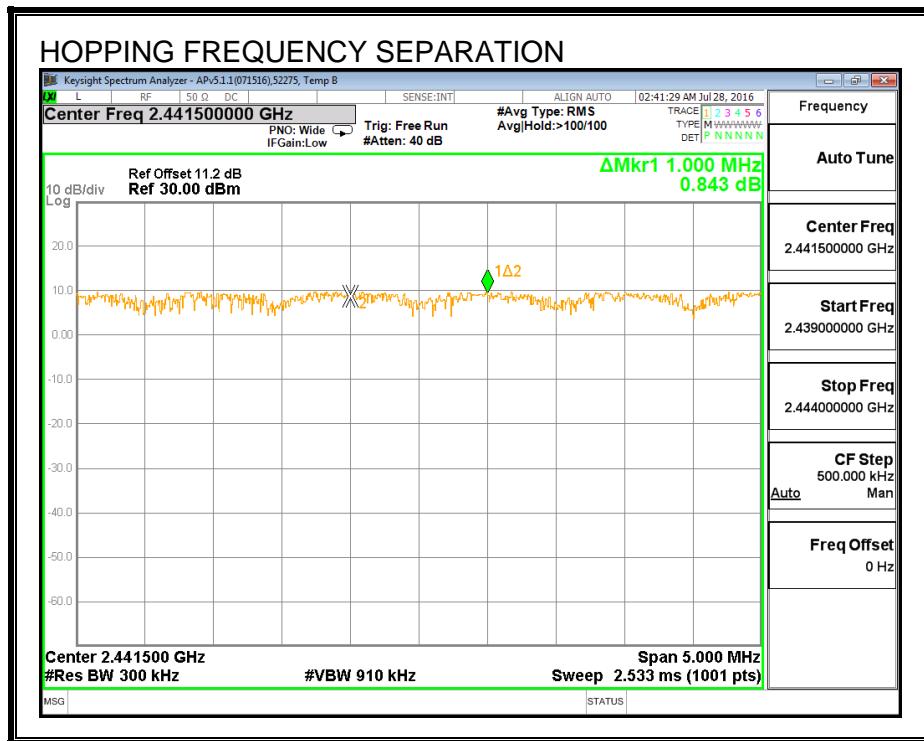

### 7.4.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

Normal Mode: 79 Channels observed.

## NUMBER OF HOPPING CHANNELS

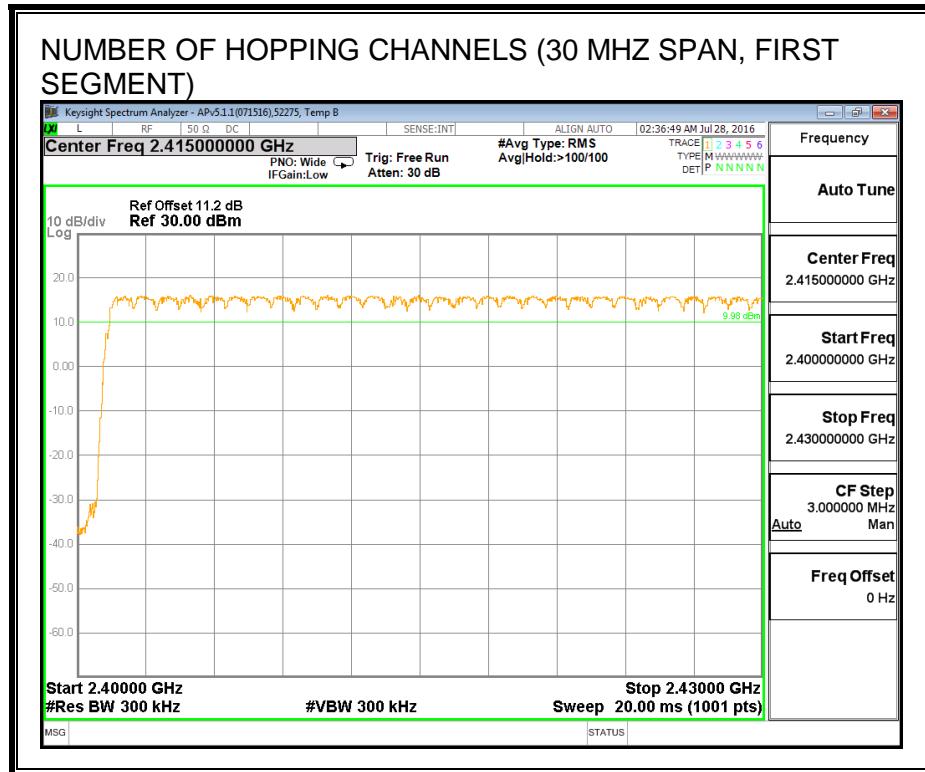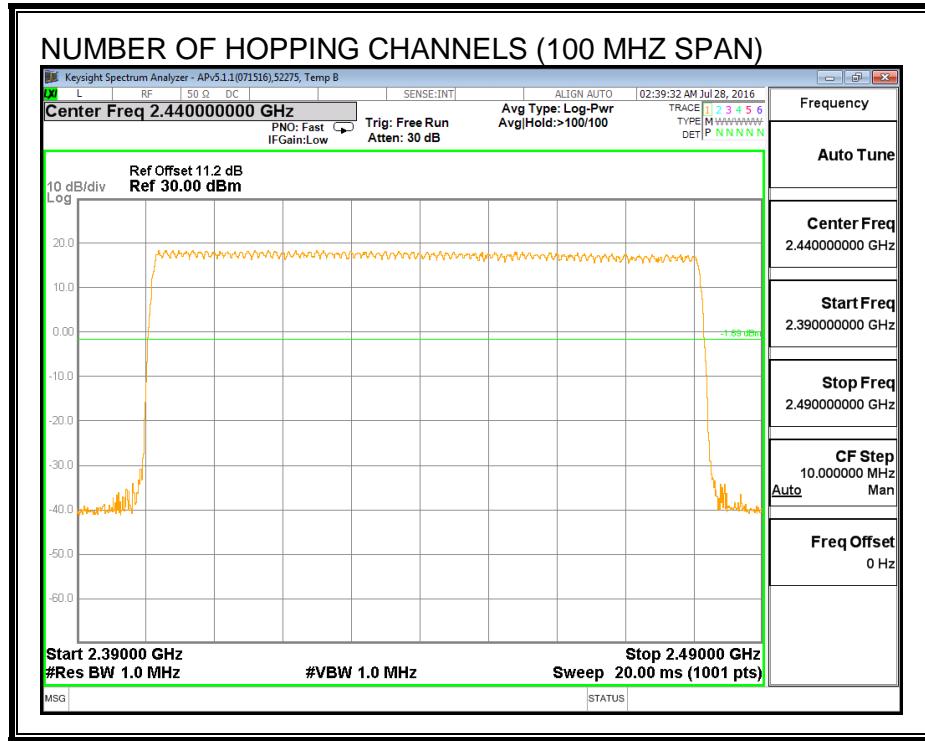

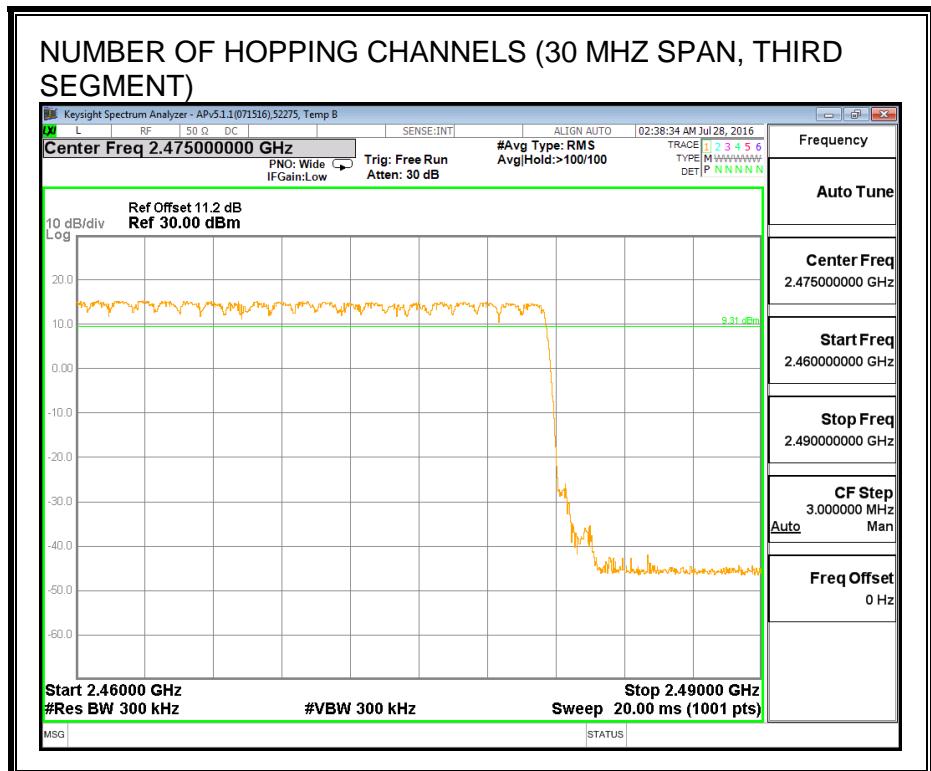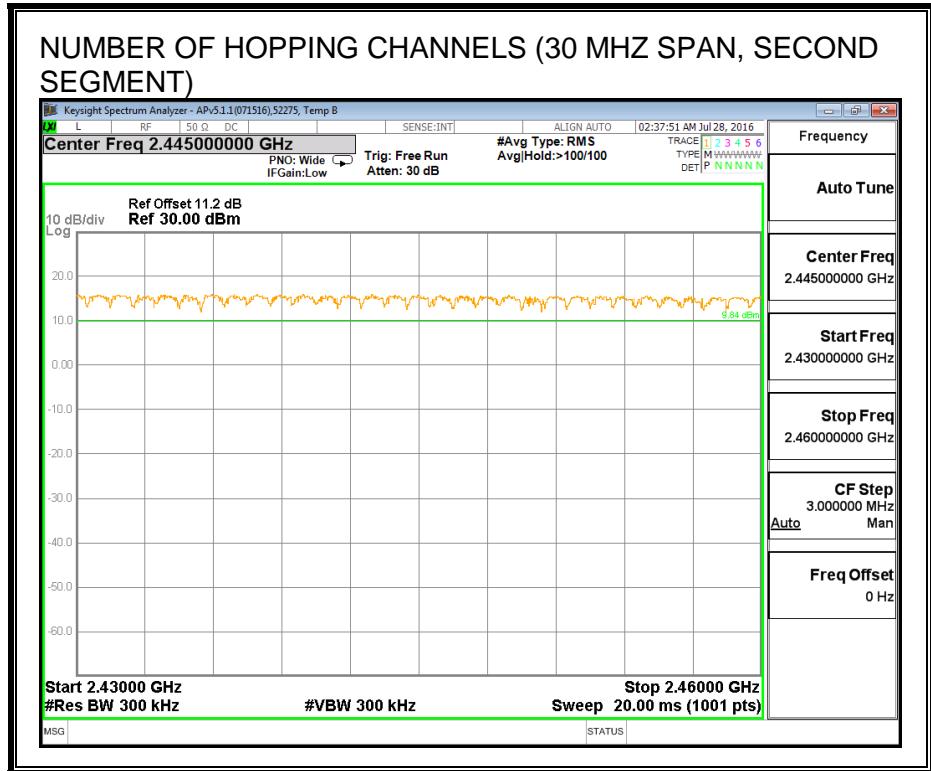

#### 7.4.4. AVERAGE TIME OF OCCUPANCY

##### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .


##### RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
3DH1	0.391	32	0.125	0.4	-0.275
3DH3	1.082	16	0.173	0.4	-0.227
3DH5	2.88	13	0.374	0.4	-0.026

## **PULSE WIDTH - 3DH1**

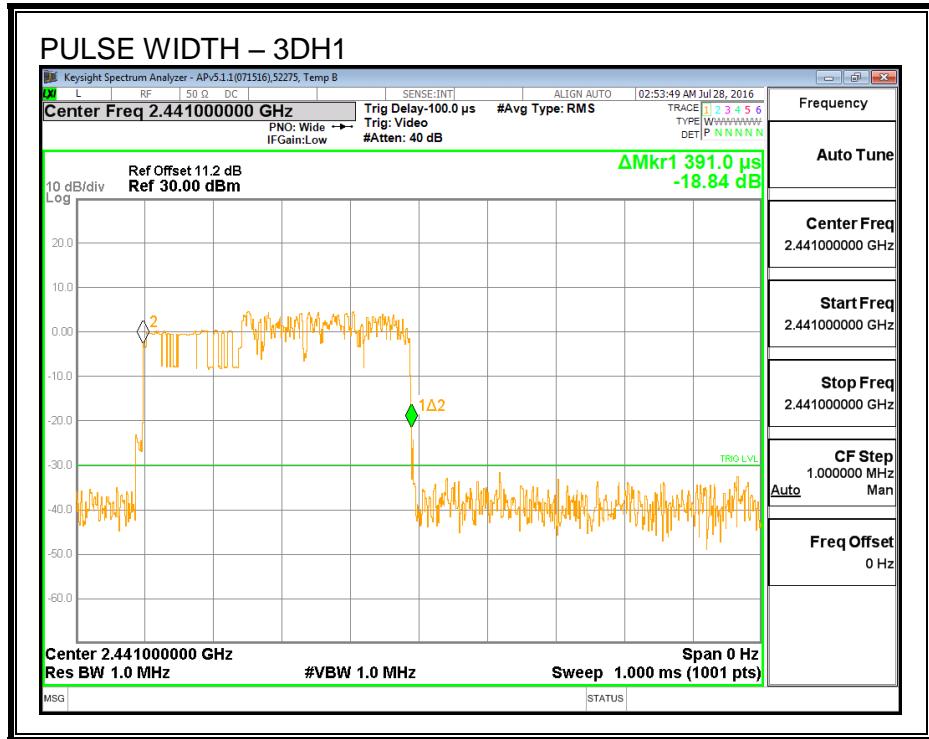


## NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH1

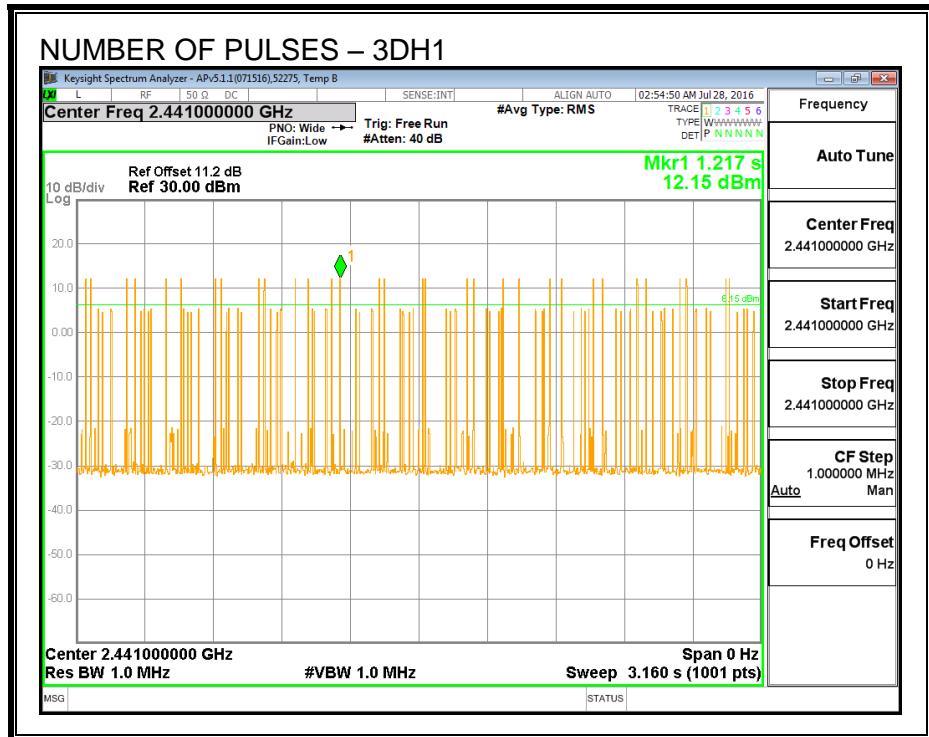


### PULSE WIDTH – 3DH3




### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH3

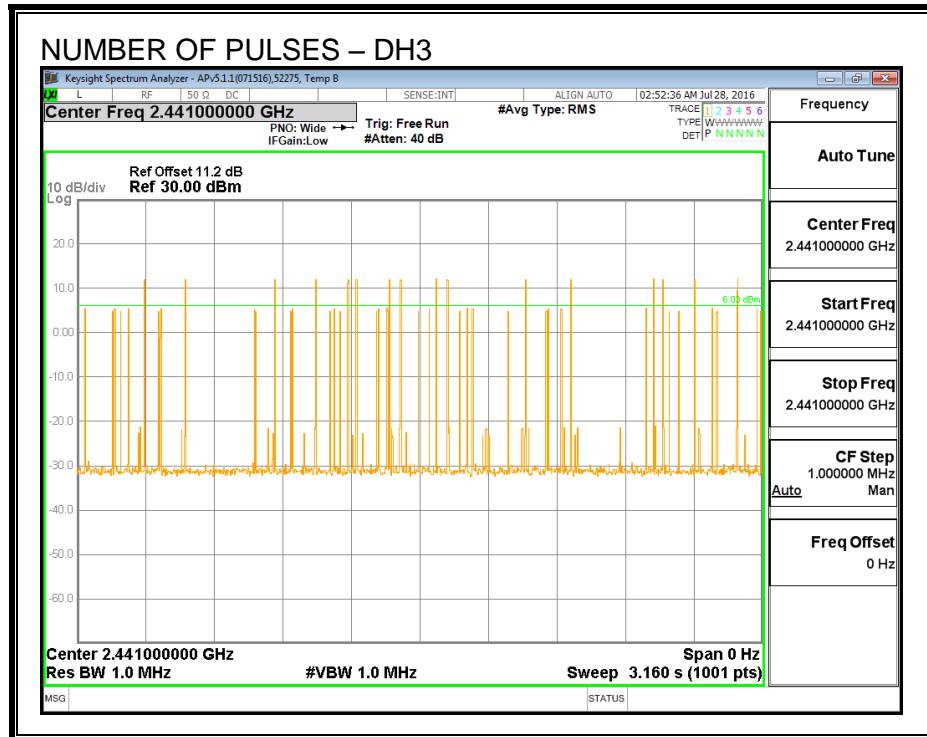

PULSE WIDTH – 3DH5

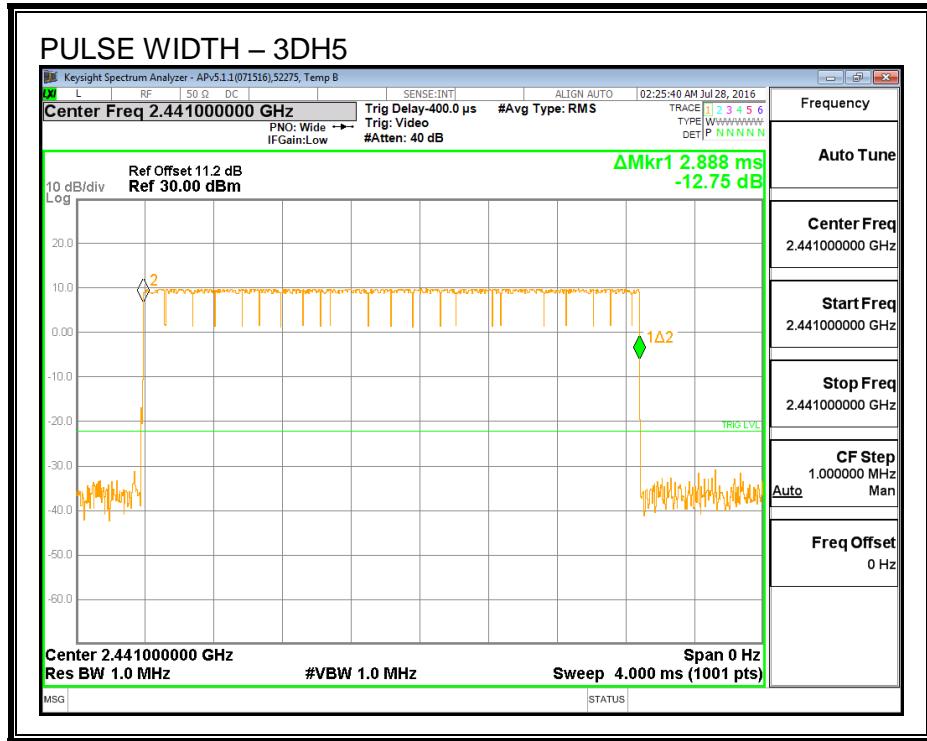

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH5

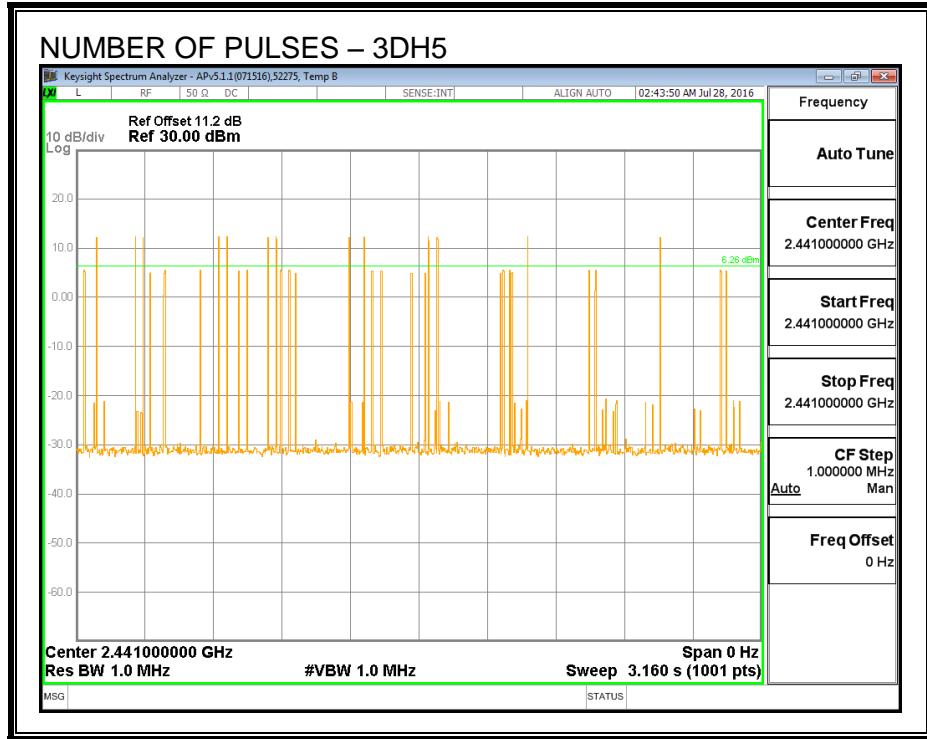

#### 7.4.5. OUTPUT POWER

##### LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

##### TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

##### RESULTS

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.28	21	-3.69
Middle	2441	17.26	21	-3.71
High	2480	17.02	21	-3.95

#### 7.4.6. AVERAGE POWER

##### LIMIT

None; for reporting purposes only.

##### TEST PROCEDURE

The transmitter output is connected to a power meter.

##### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power (dBm)</b>
Low	2402	13.89
Middle	2441	13.99
High	2480	13.75

#### 7.4.7. CONDUCTED SPURIOUS EMISSIONS

##### LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

##### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

##### RESULTS



**SPURIOUS EMISSIONS, LOW CHANNEL**

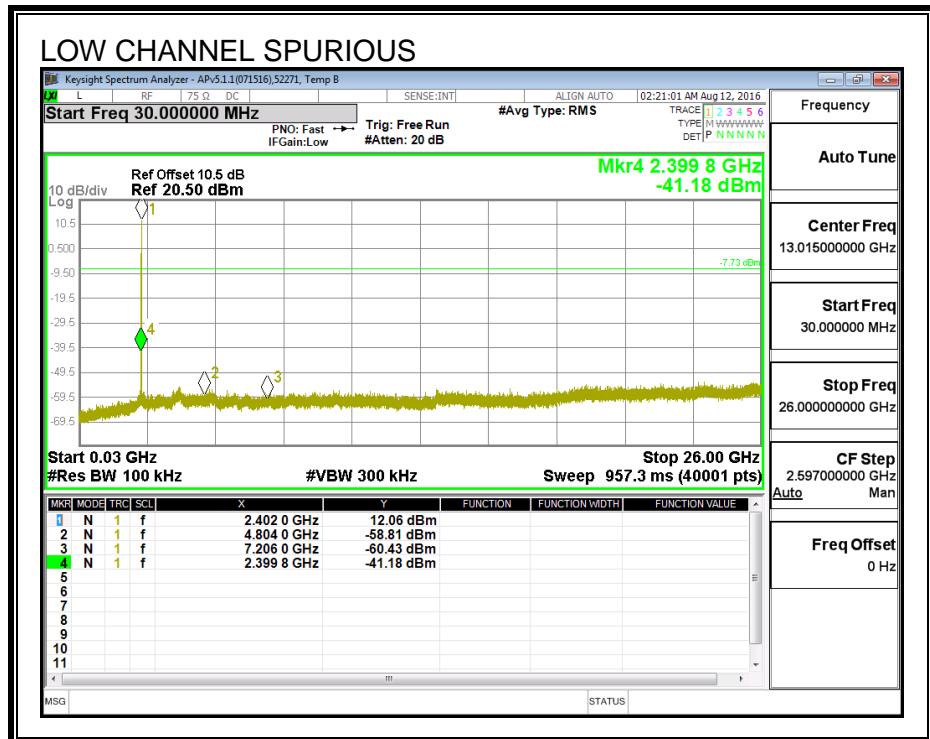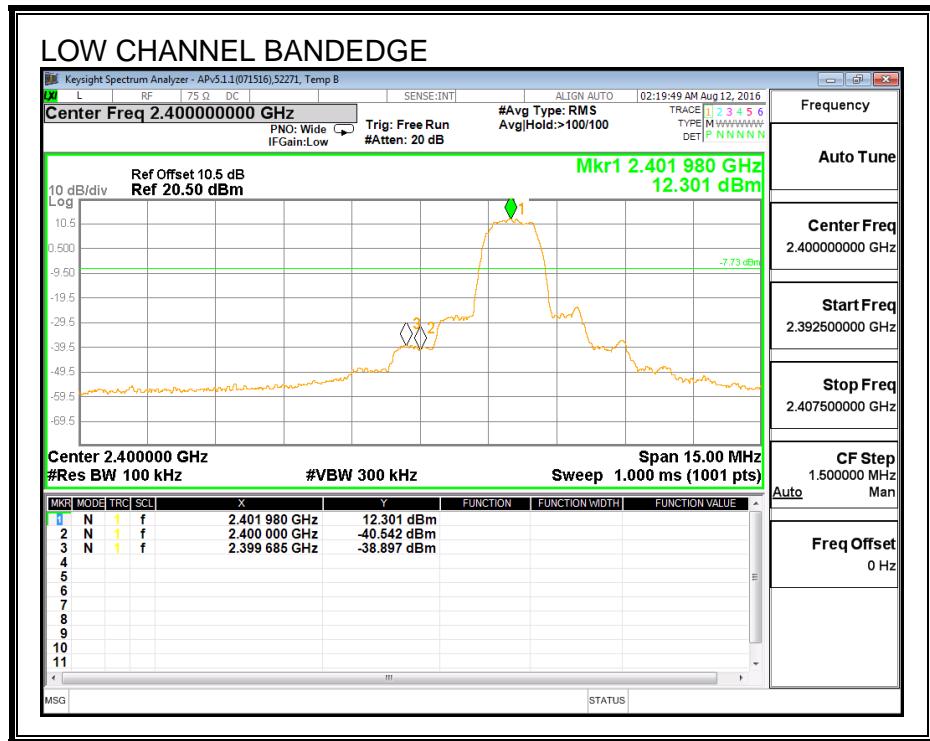



**SPURIOUS EMISSIONS, MID CHANNEL**

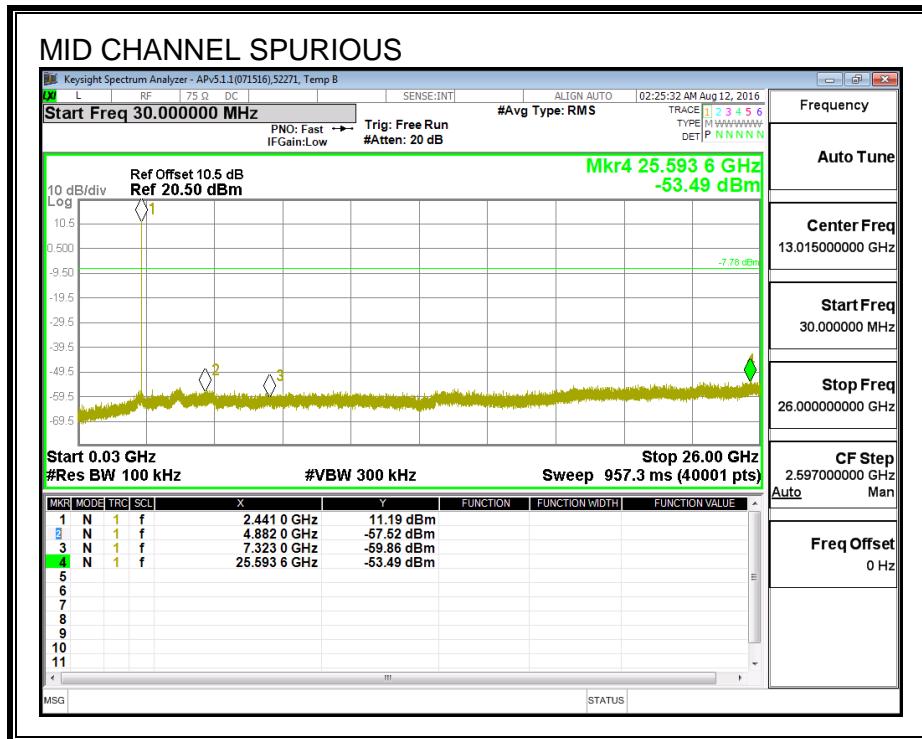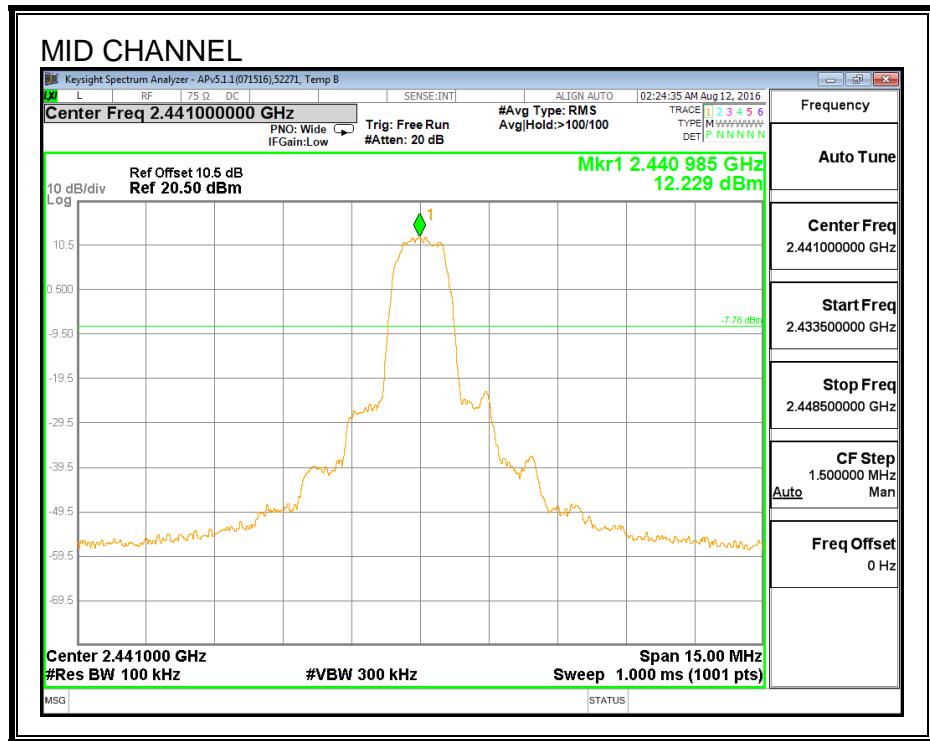

## SPURIOUS EMISSIONS, HIGH CHANNEL

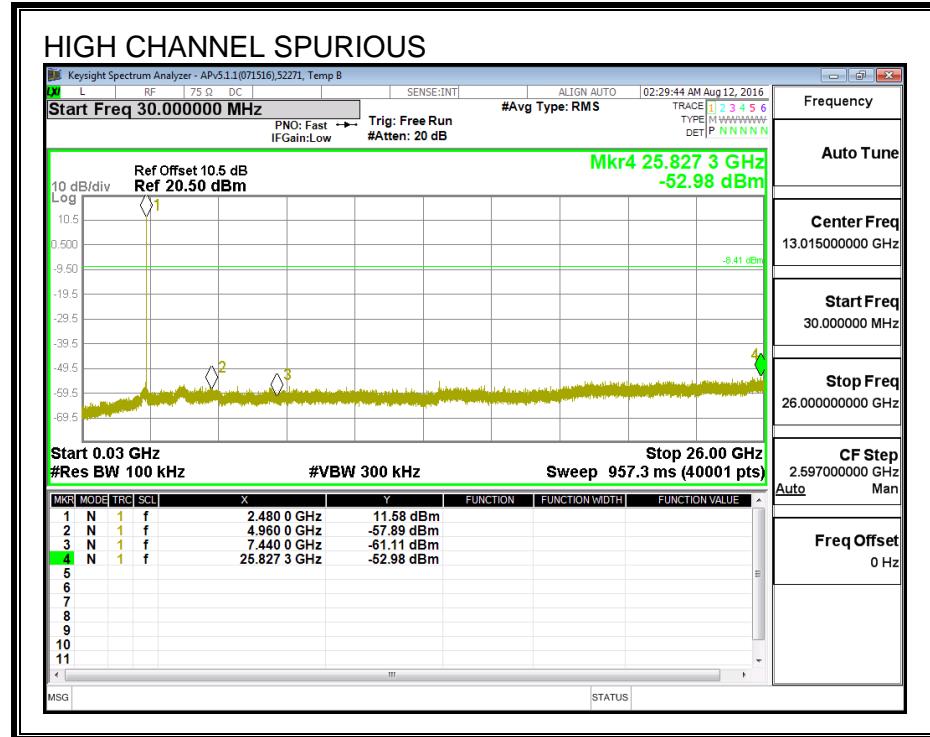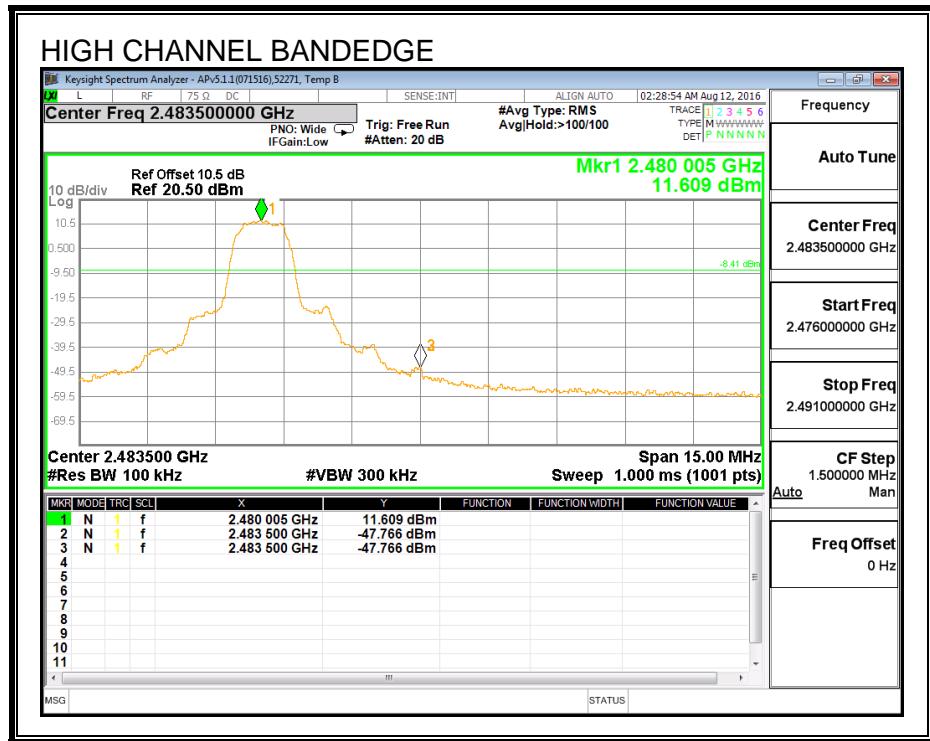

## SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

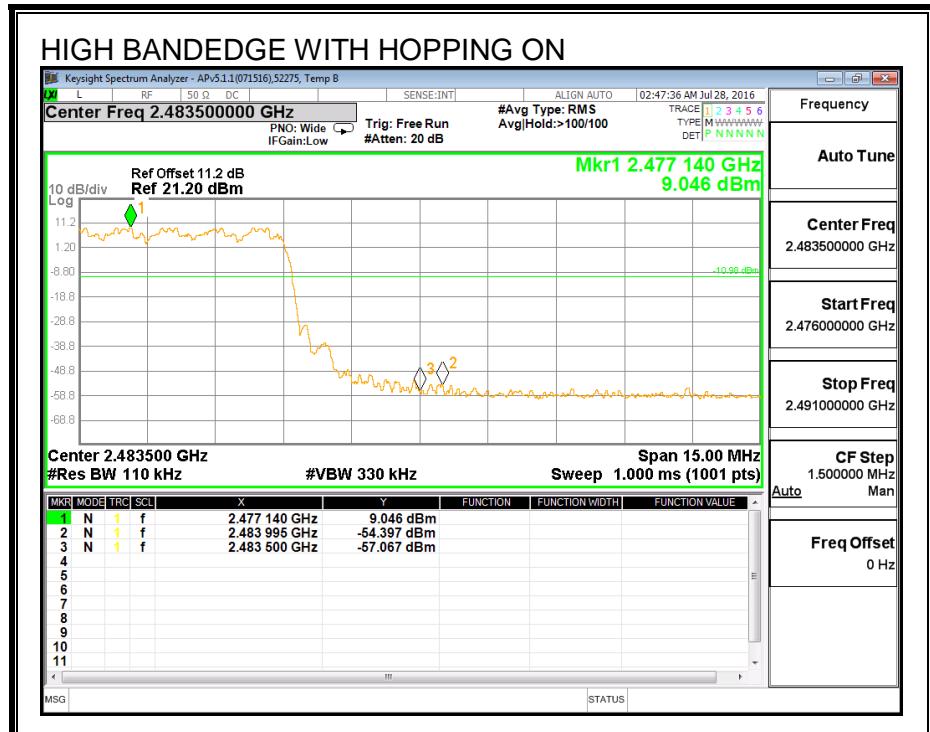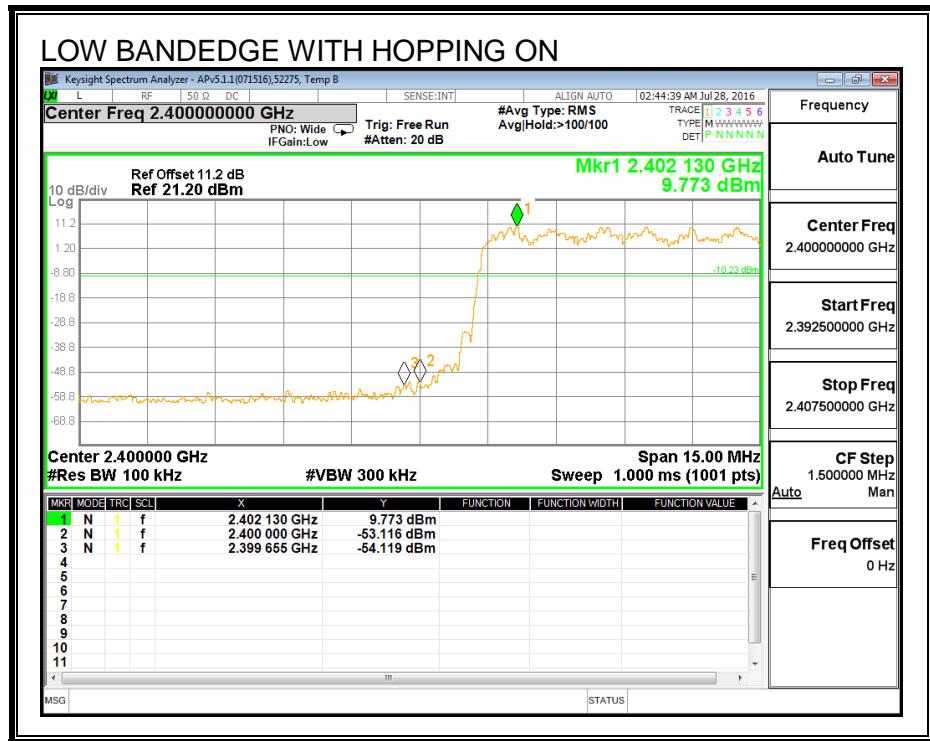

## 7.5. LOW POWER MODE BASIC DATA RATE GFSK MODULATION

### 7.5.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	904.40	864.38
Middle	2441	914.20	905.58
High	2480	927.70	890.81

## 20 dB AND 99% BANDWIDTH

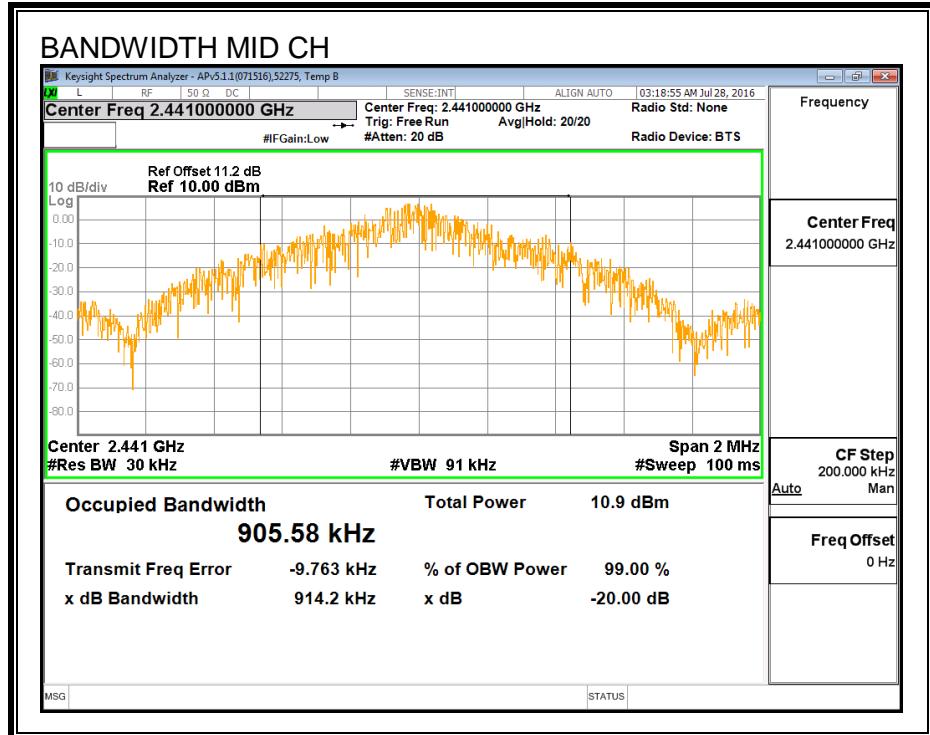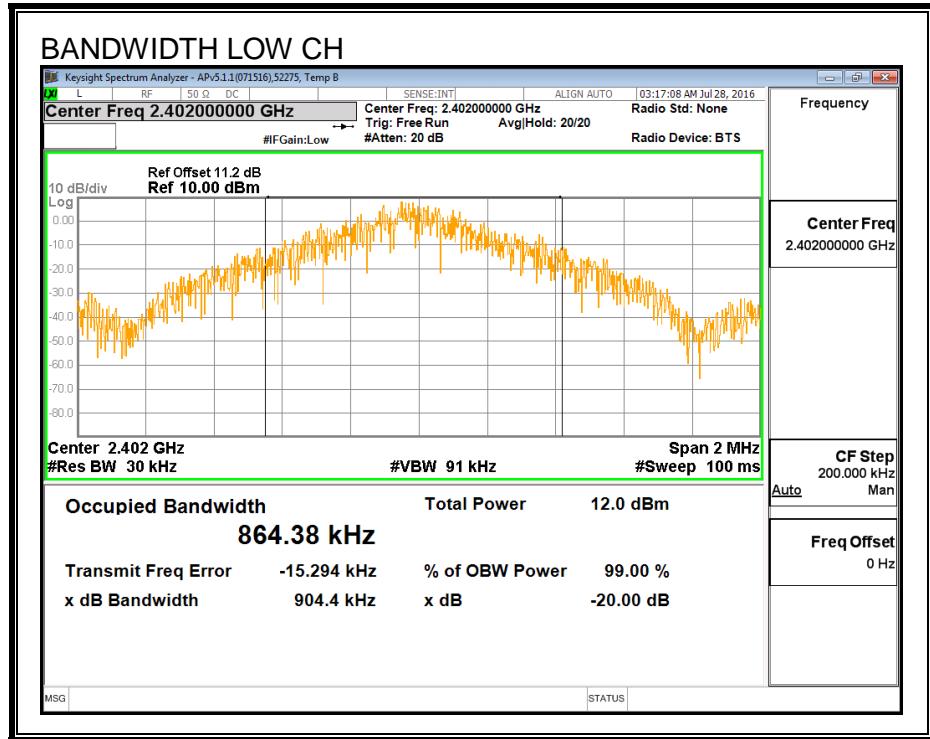

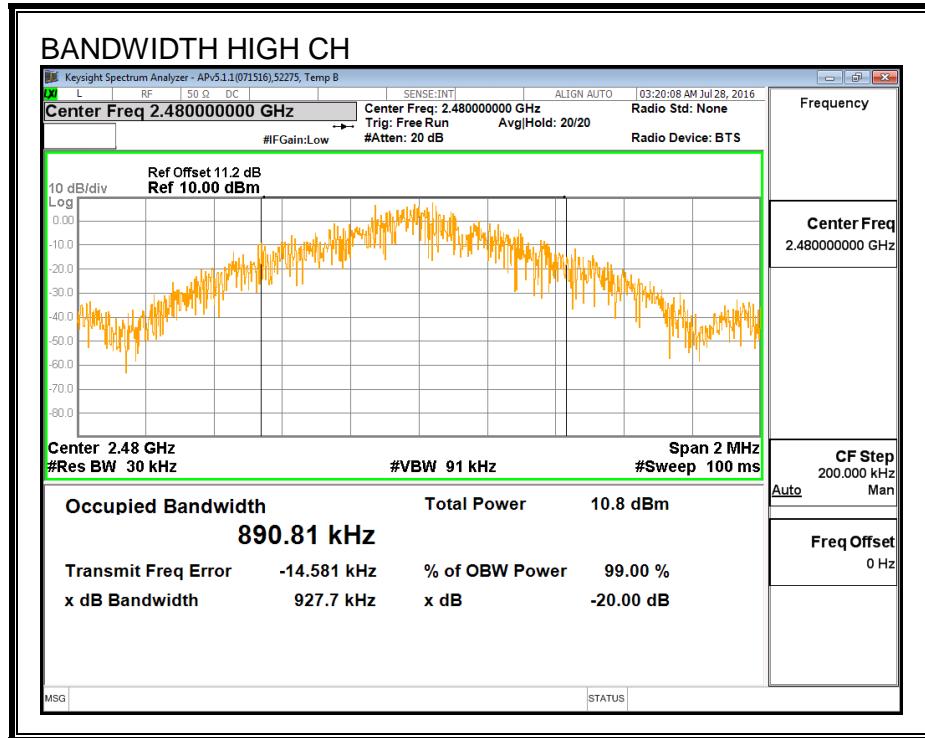

## 7.5.2. HOPPING FREQUENCY SEPARATION

### LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

### RESULTS

#### HOPPING FREQUENCY SEPARATION

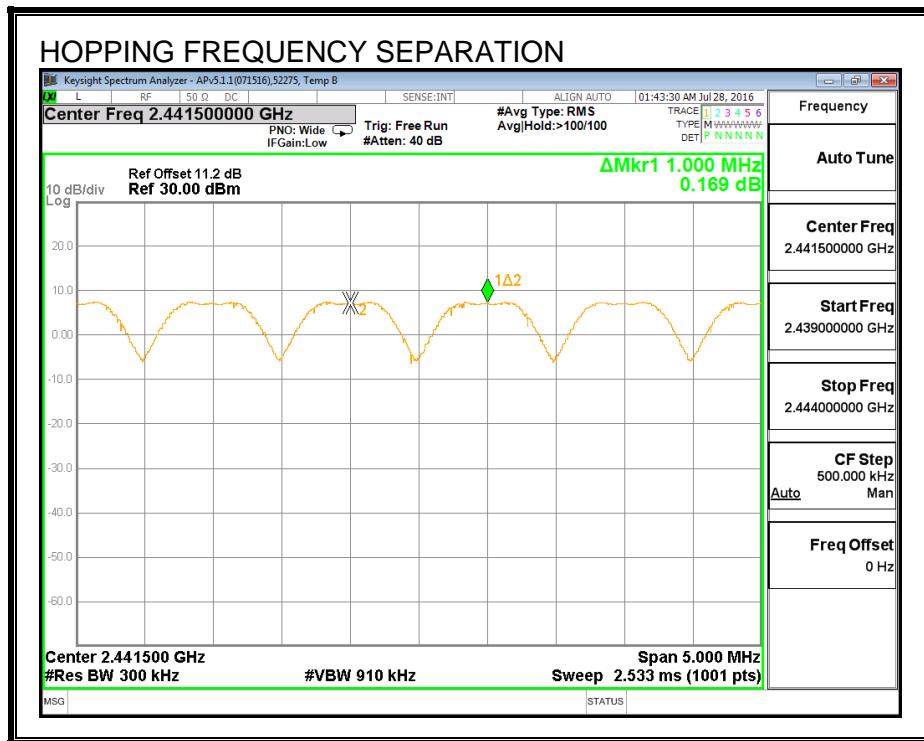

### 7.5.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

Normal Mode: 79 Channels observed.

## NUMBER OF HOPPING CHANNELS

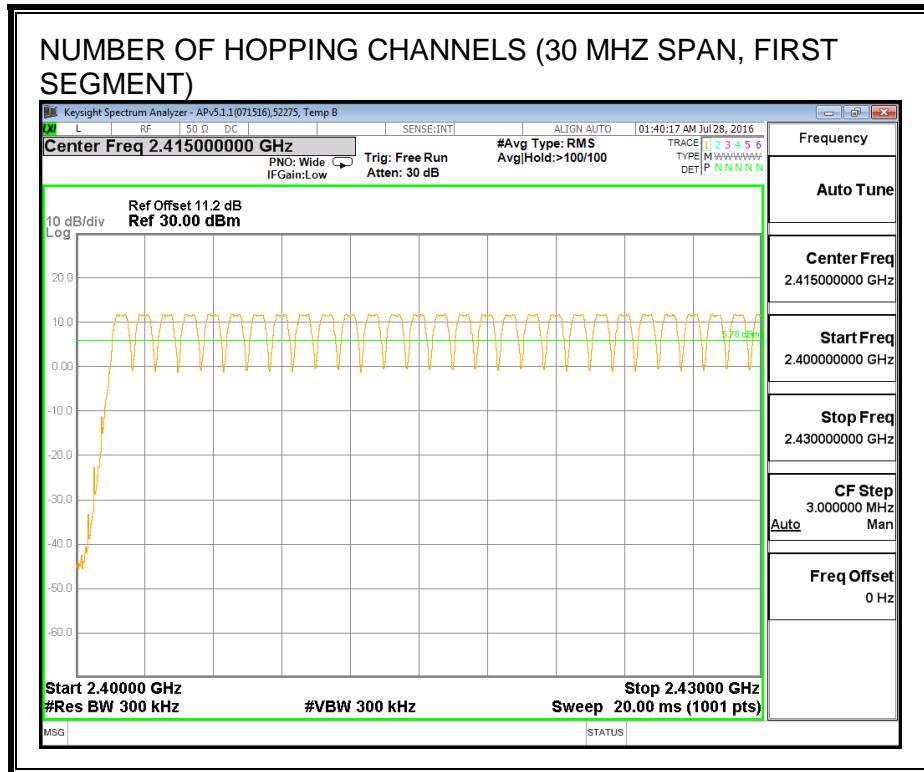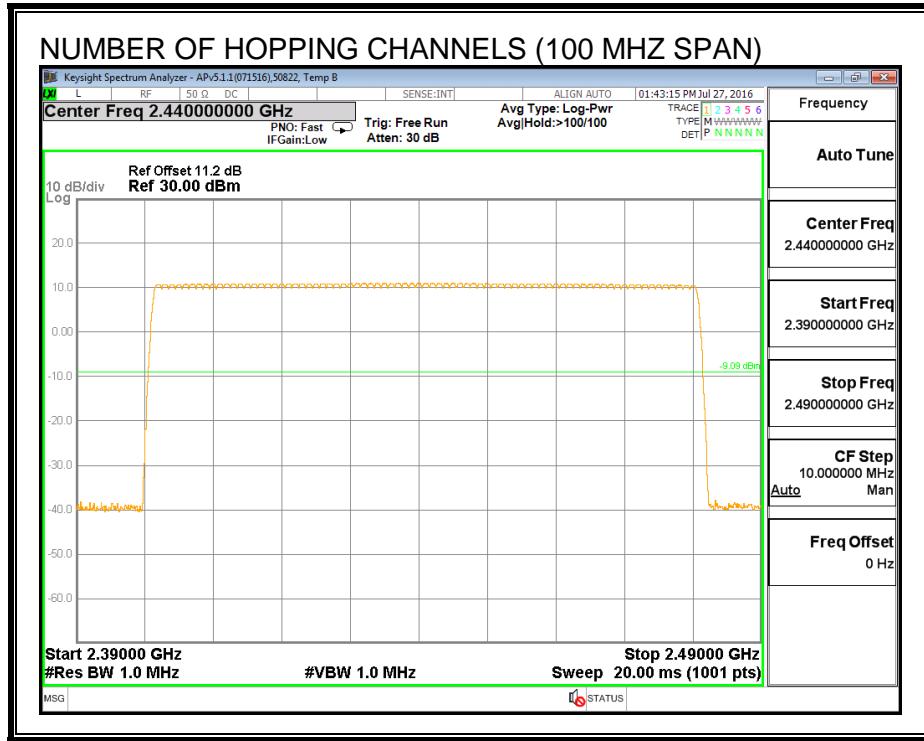

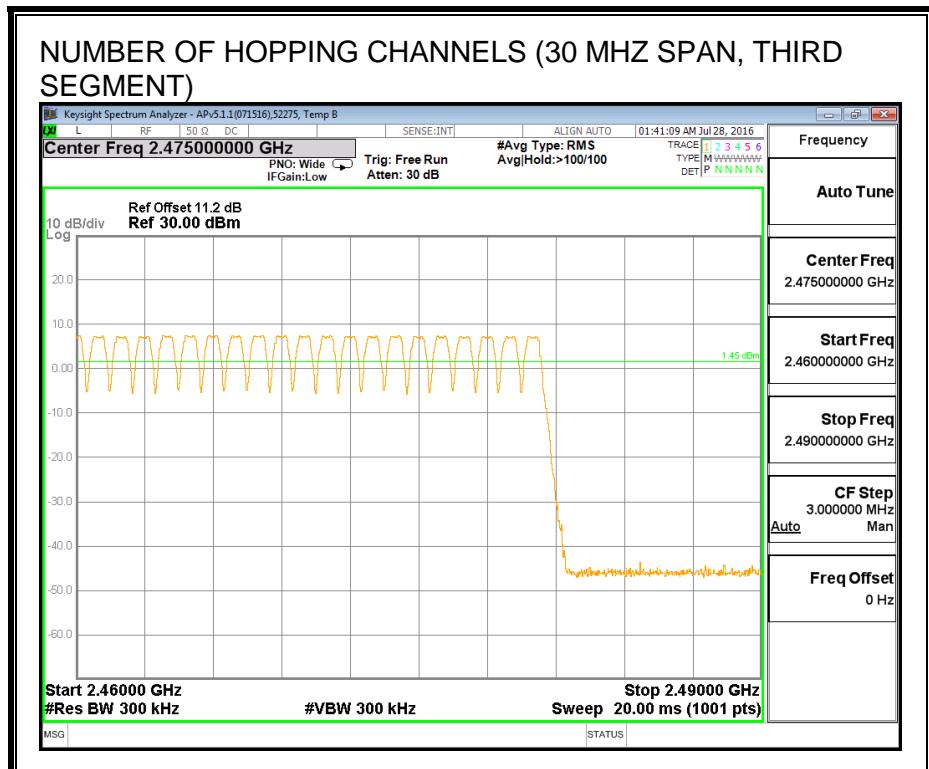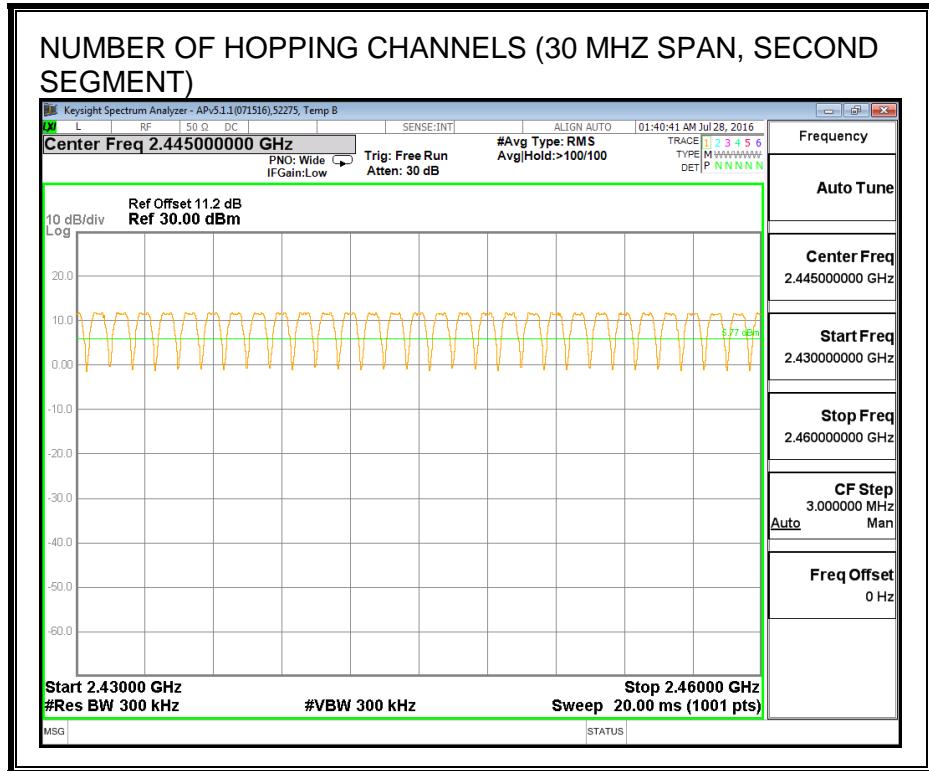

#### 7.5.4. AVERAGE TIME OF OCCUPANCY

##### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$ .


##### RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK Normal Mode</b>					
DH1	0.385	32	0.123	0.4	-0.277
DH3	1.65	18	0.297	0.4	-0.103
DH5	2.88	13	0.374	0.4	-0.026
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK AFH Mode</b>					
DH1	0.385	8	0.031	0.4	-0.369
DH3	1.65	4.5	0.074	0.4	-0.326
DH5	2.88	3.25	0.094	0.4	-0.306


**PULSE WIDTH - DH1**




**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1**

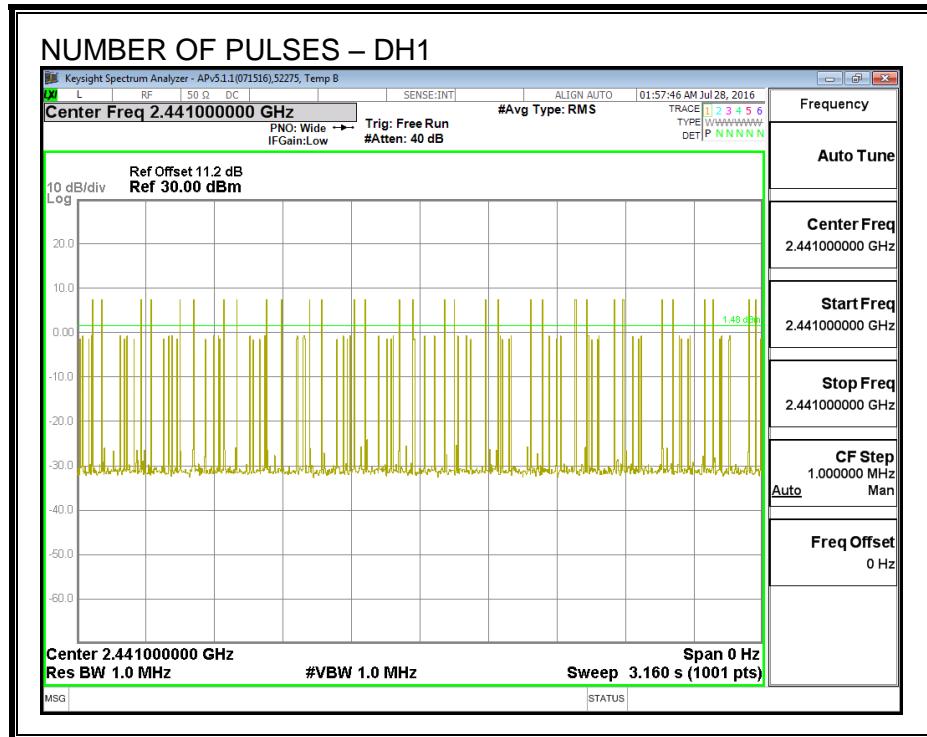


**PULSE WIDTH – DH3**

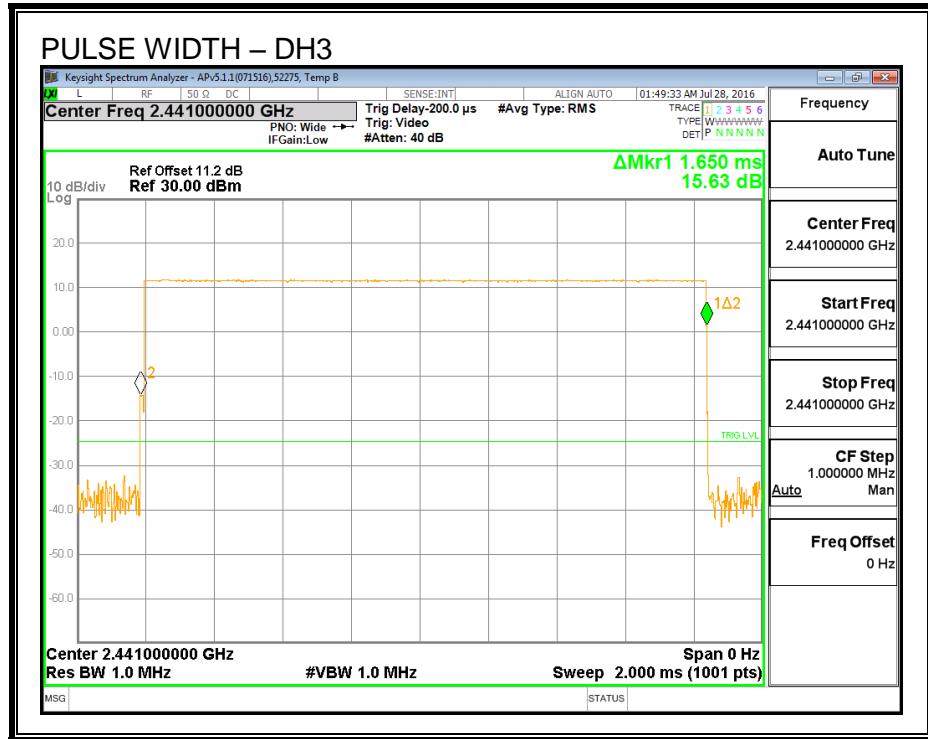


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3**

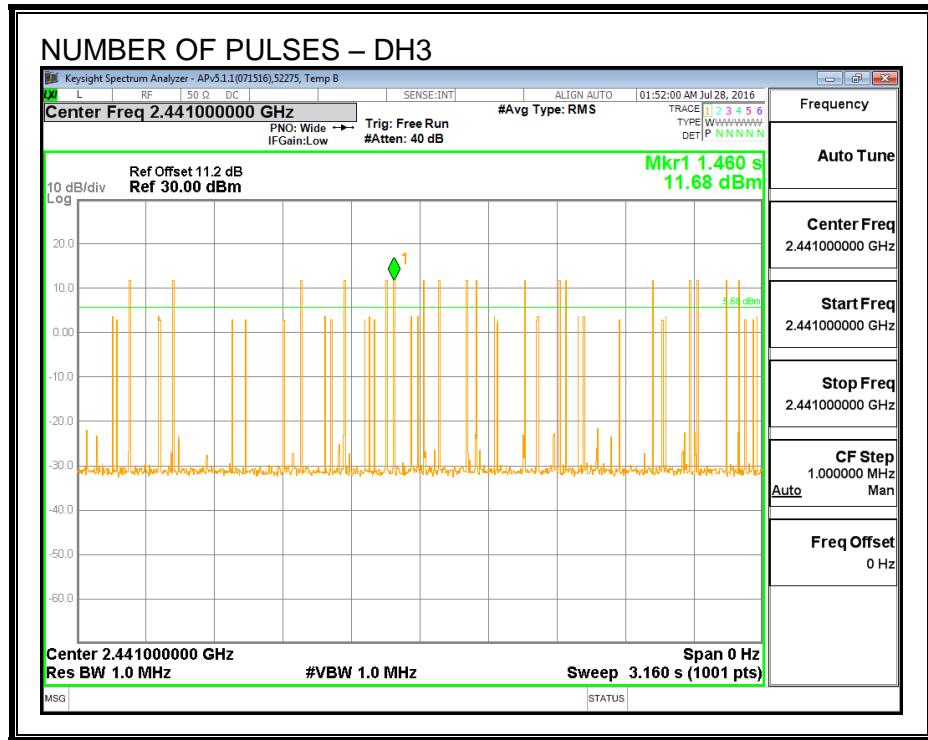

**PULSE WIDTH – DH5**

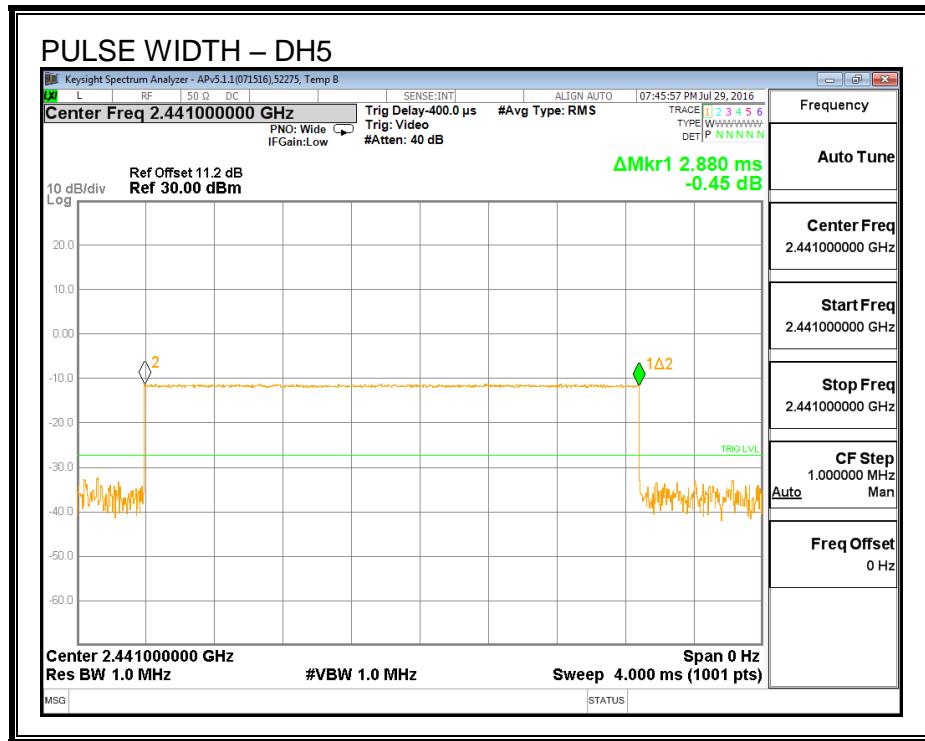

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5**

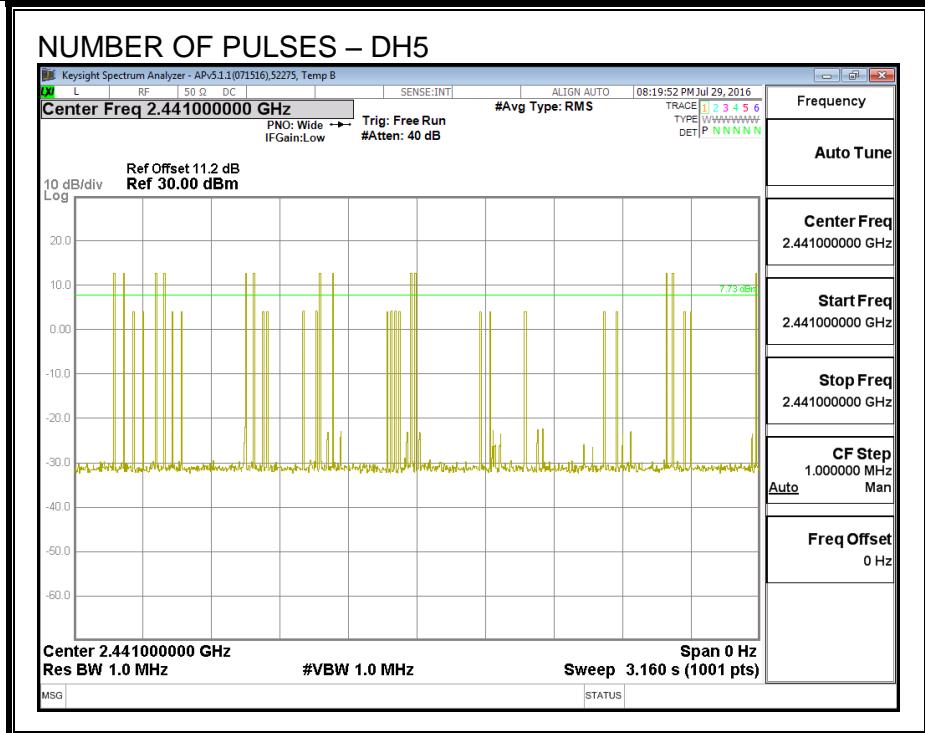

### 7.5.5. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

#### TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

#### RESULTS

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.55	30	-18.45
Middle	2441	11.68	30	-18.32
High	2480	11.64	30	-18.36

## 7.5.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power (dBm)</b>
Low	2402	11.31
Middle	2441	11.43
High	2480	11.38

## 7.5.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### RESULTS



## SPURIOUS EMISSIONS, LOW CHANNEL

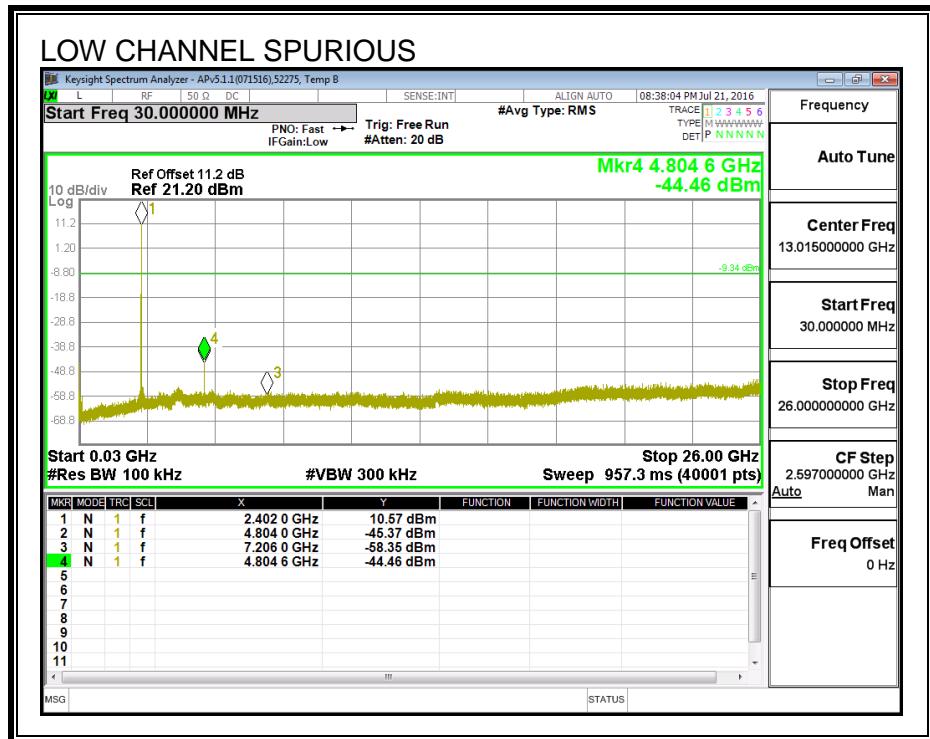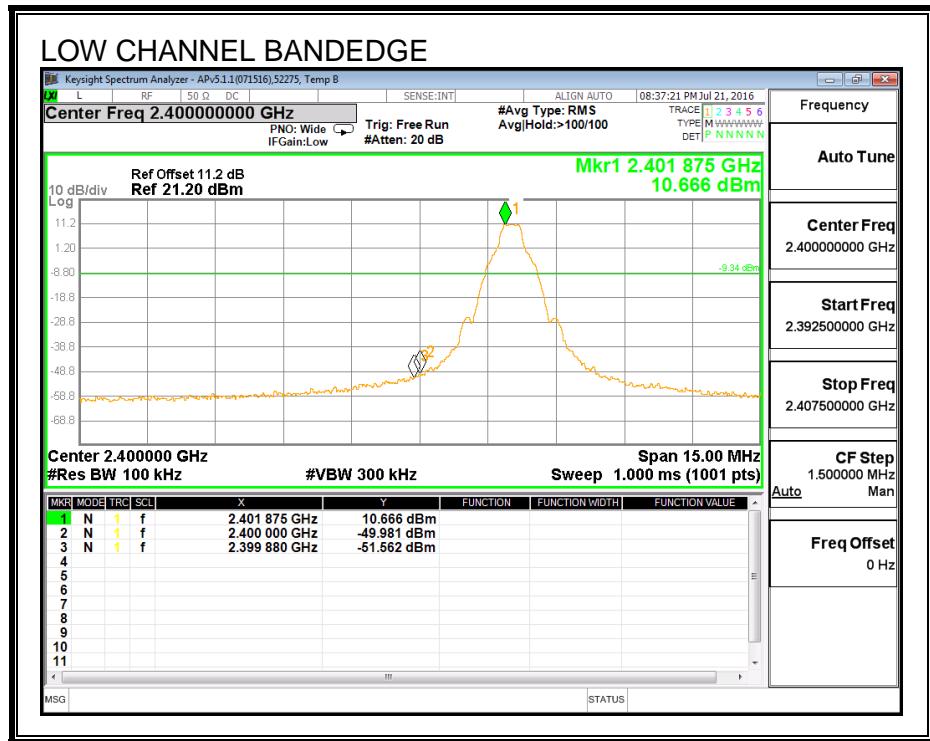



## SPURIOUS EMISSIONS, MID CHANNEL

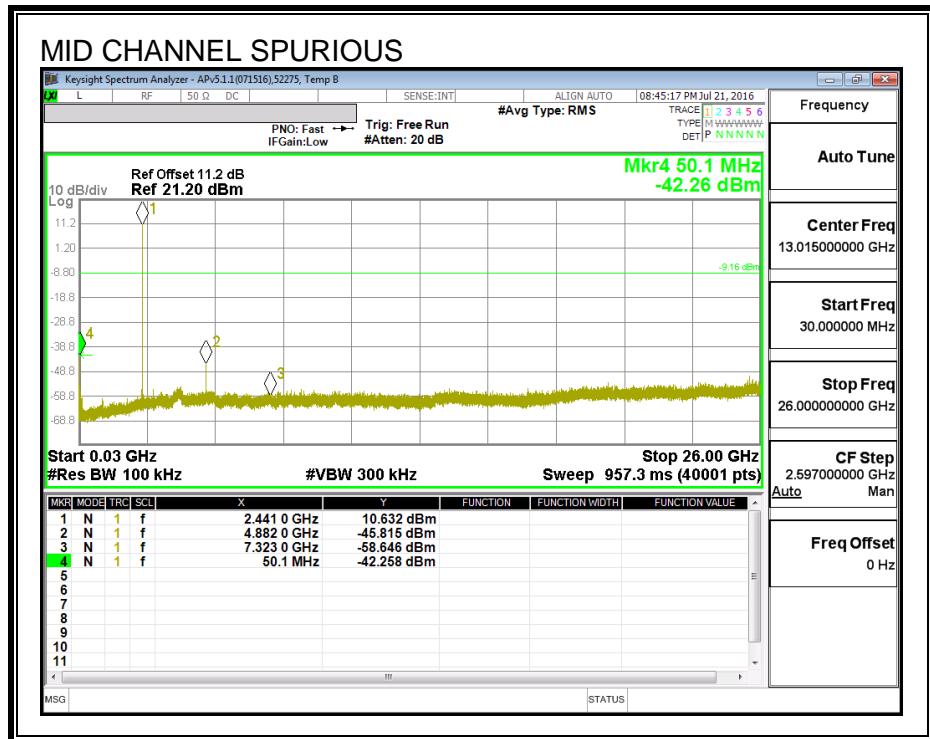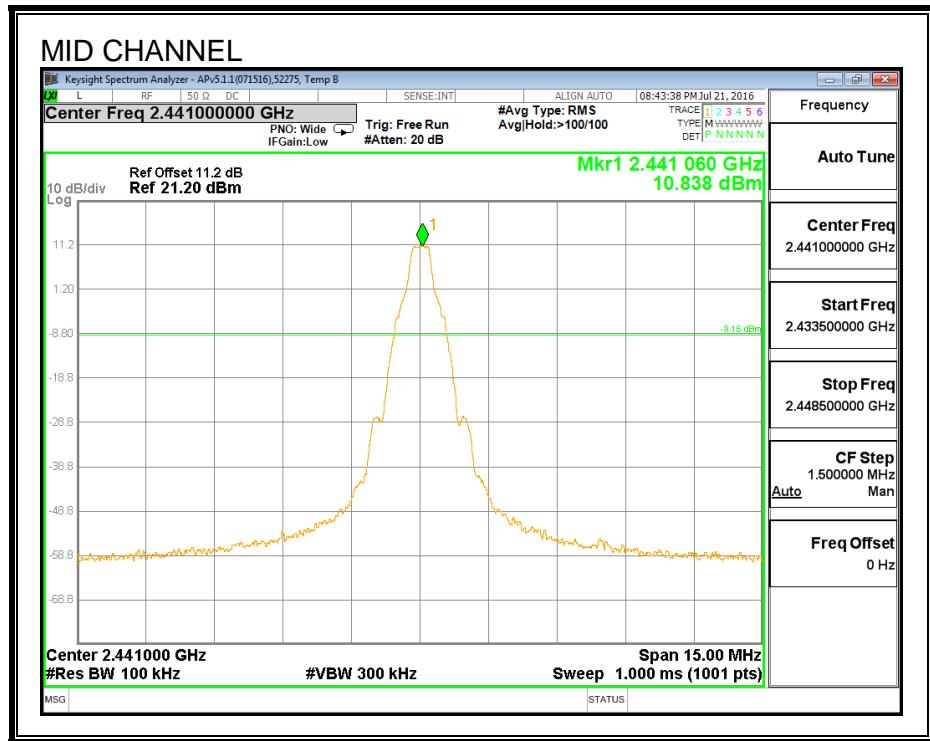

## SPURIOUS EMISSIONS, HIGH CHANNEL

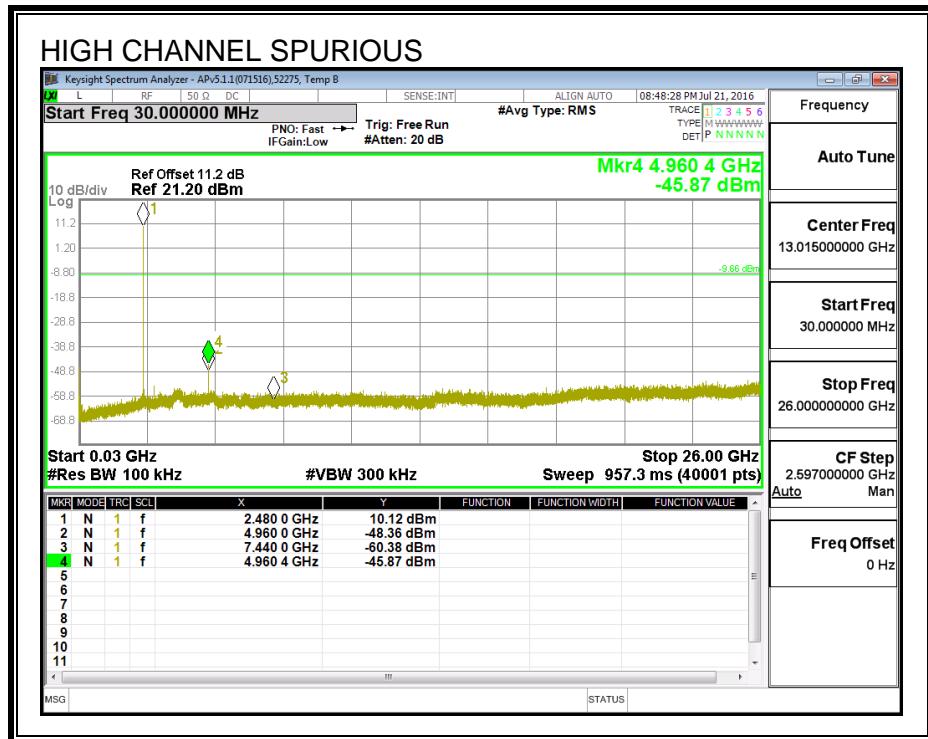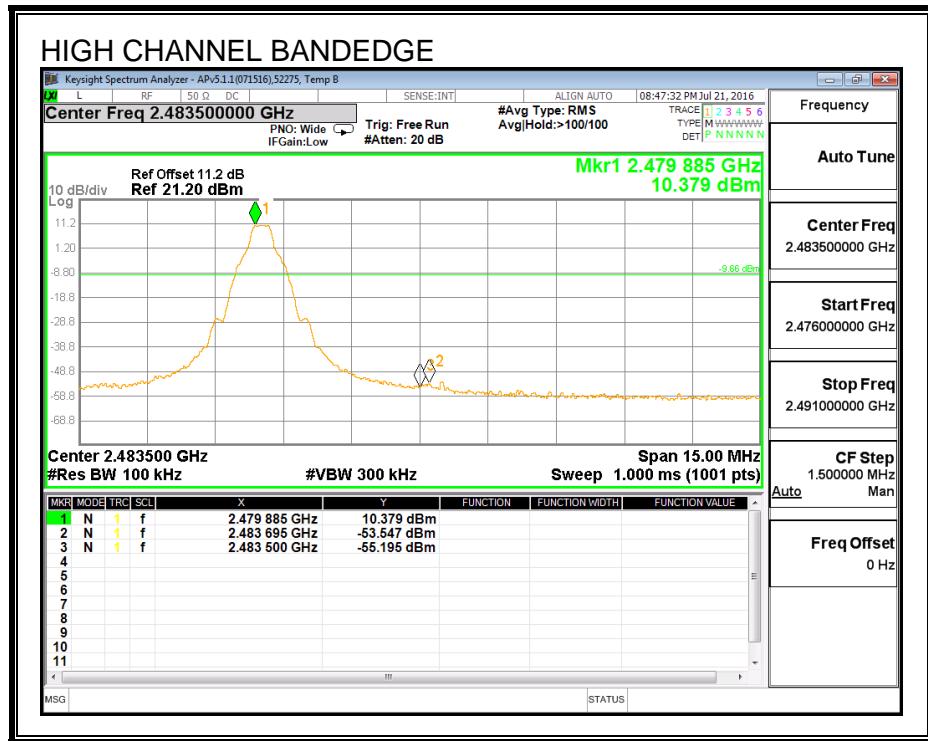

## SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

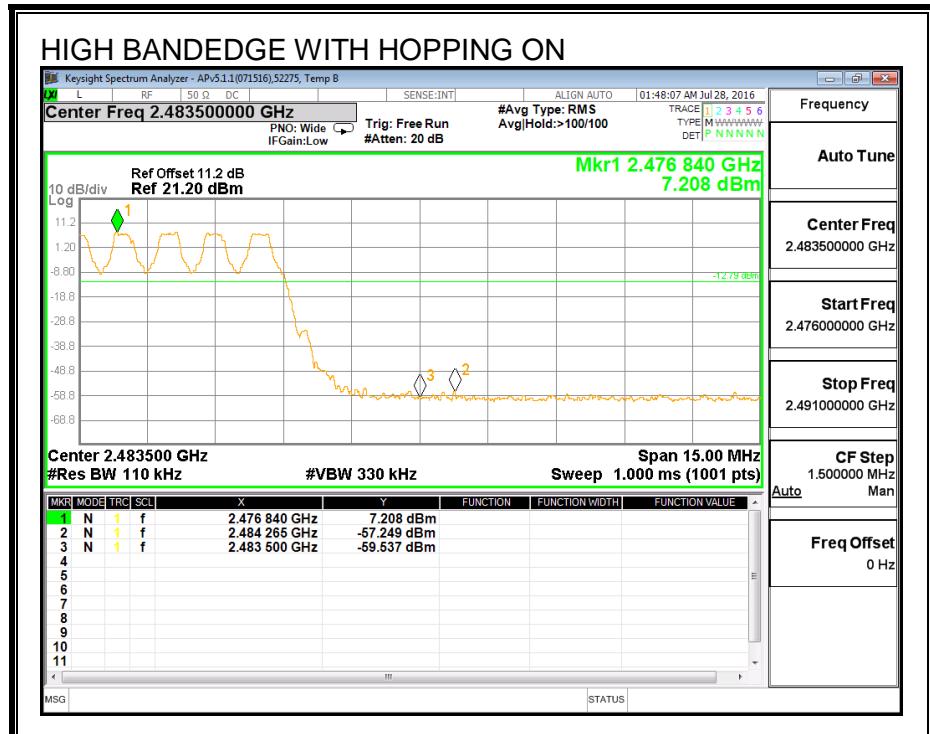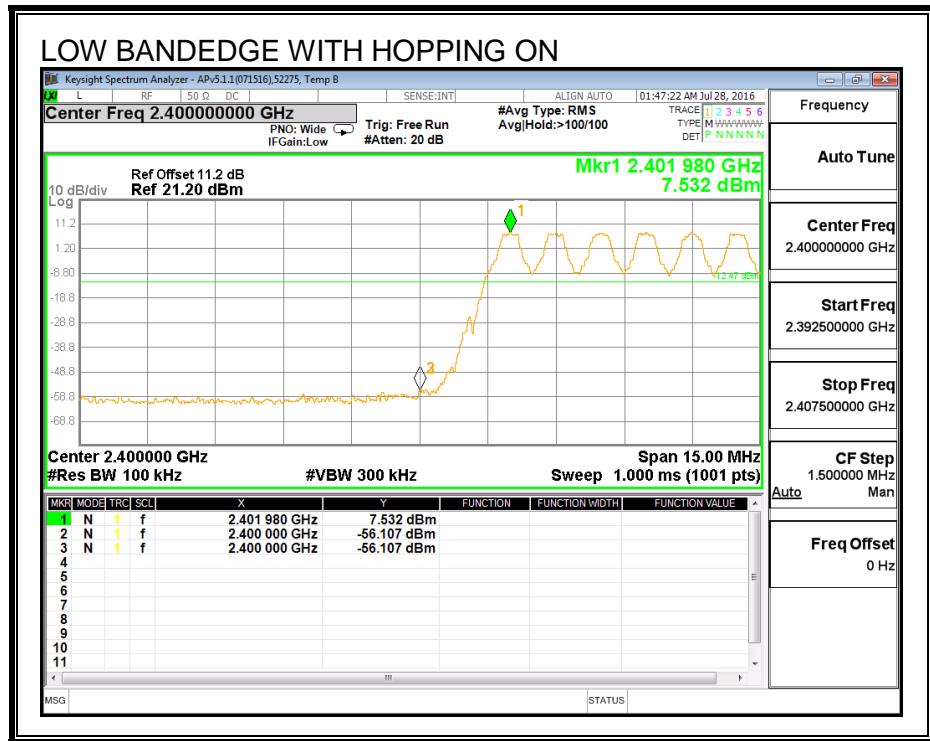

## 7.6. LOW POWER MODE ENHANCED DATA RATE QPSK MODULATION

### 7.6.1. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.52	21	-10.45
Middle	2441	10.66	21	-10.31
High	2480	10.59	21	-10.38

## 7.6.2. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.27
Middle	2441	8.44
High	2480	8.38

## 7.7. LOW POWER MODE ENHANCED DATA RATE 8PSK MODULATION

### 7.7.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.331	1.232
Middle	2441	1.313	1.203
High	2480	1.334	1.192

## 20 dB AND 99% BANDWIDTH

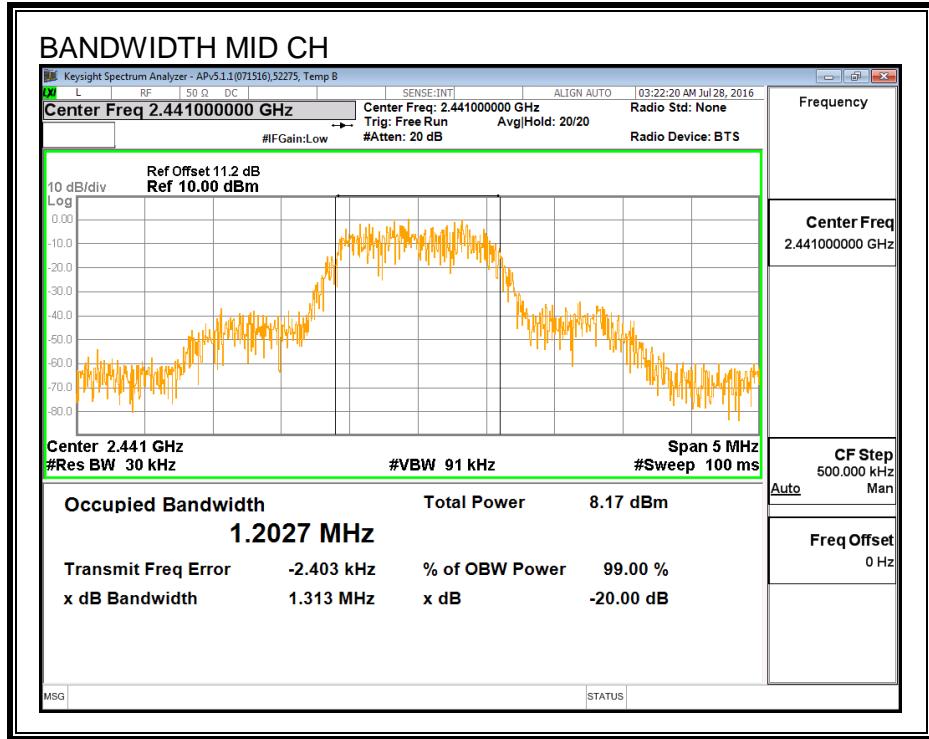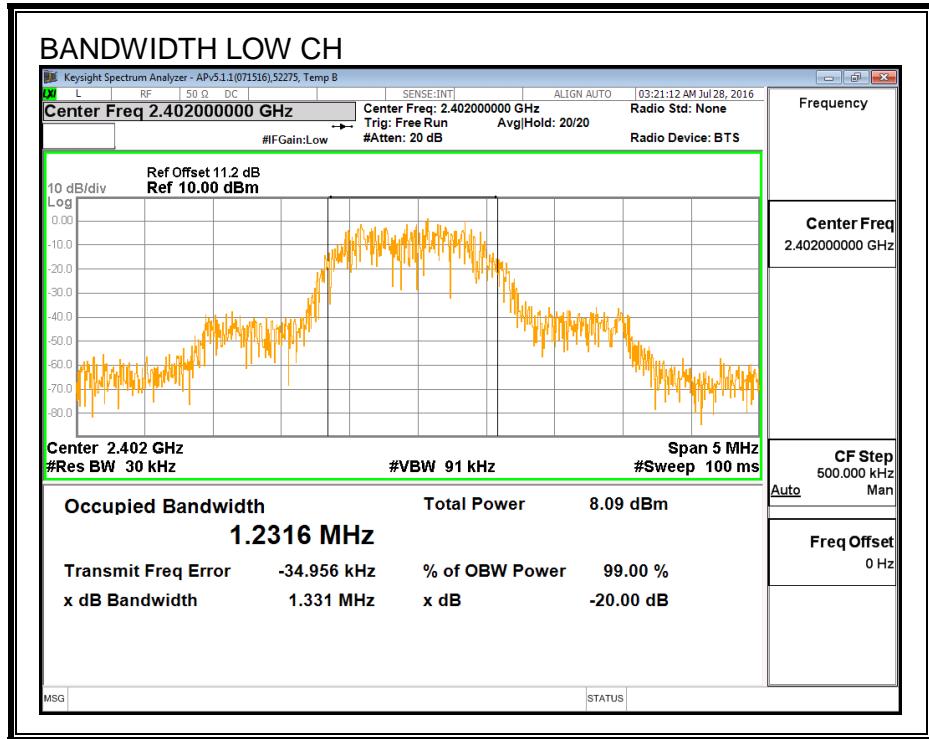

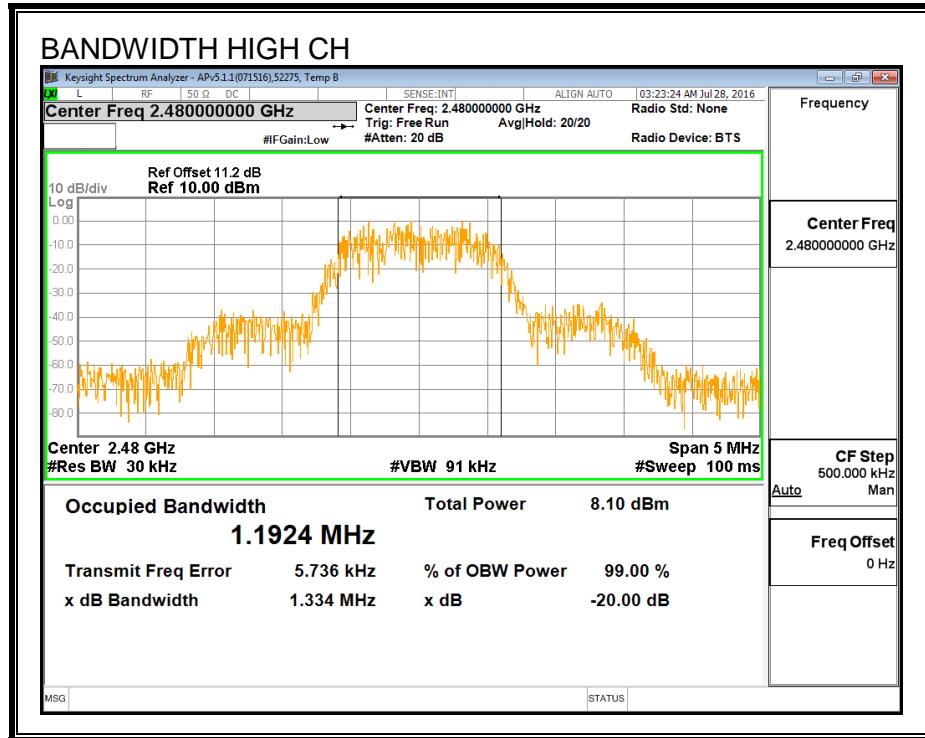

## 7.7.2. HOPPING FREQUENCY SEPARATION

### LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

### RESULTS

#### HOPPING FREQUENCY SEPARATION

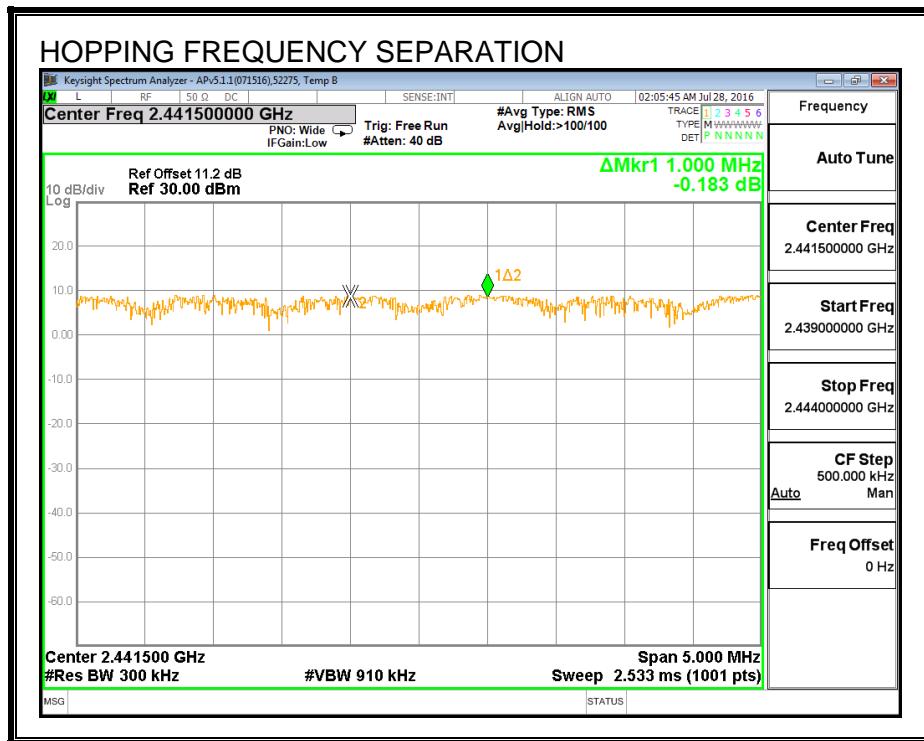

### 7.7.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

Normal Mode: 79 Channels observed.

## NUMBER OF HOPPING CHANNELS

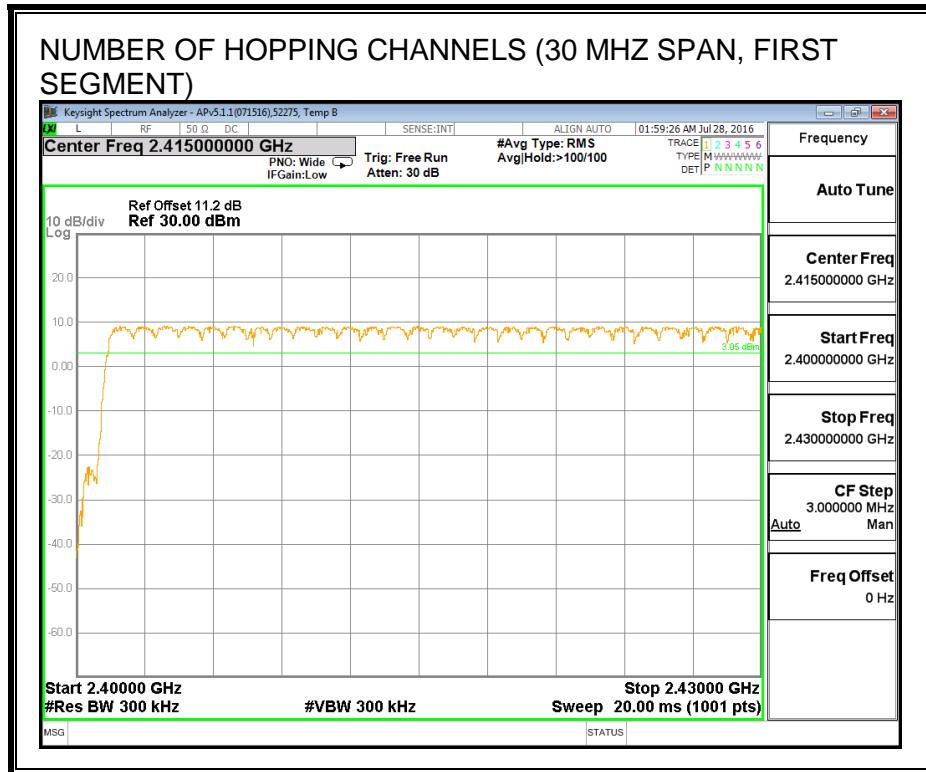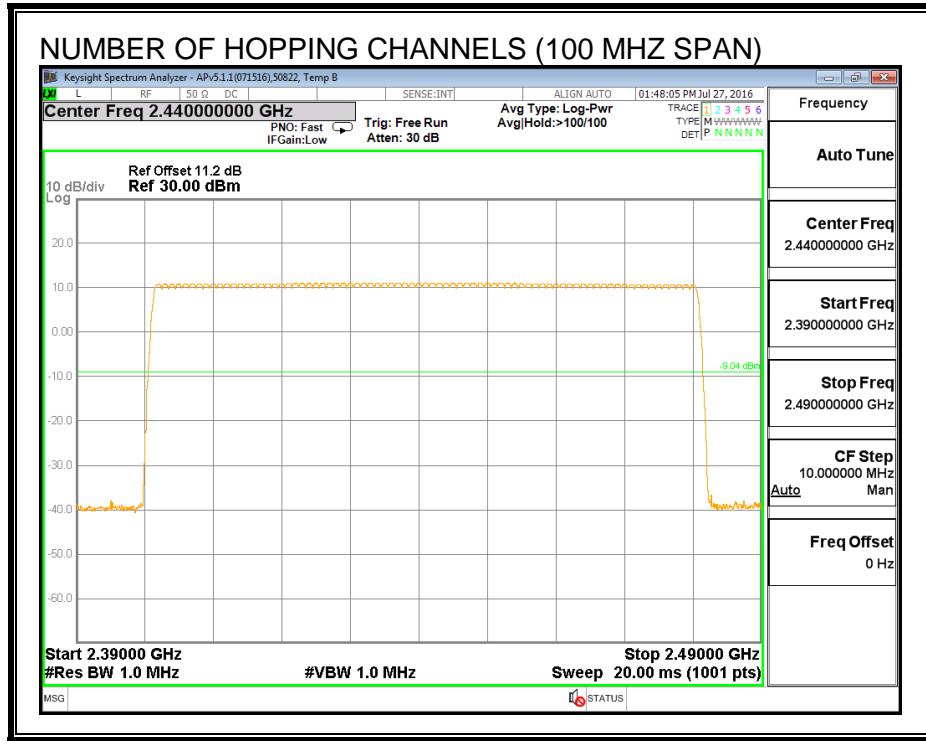

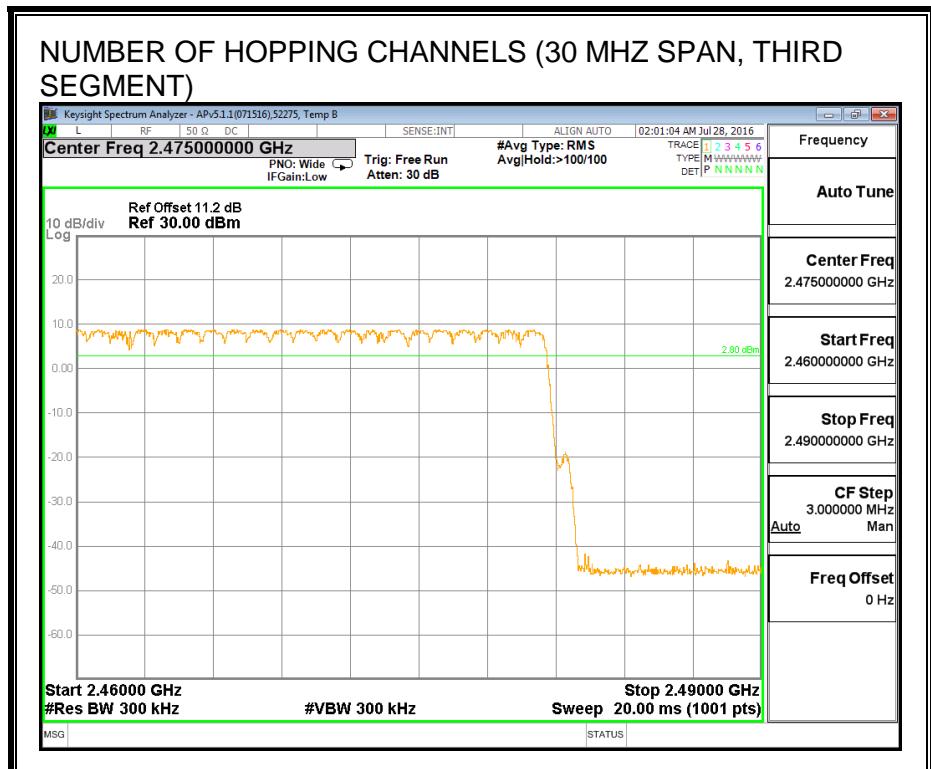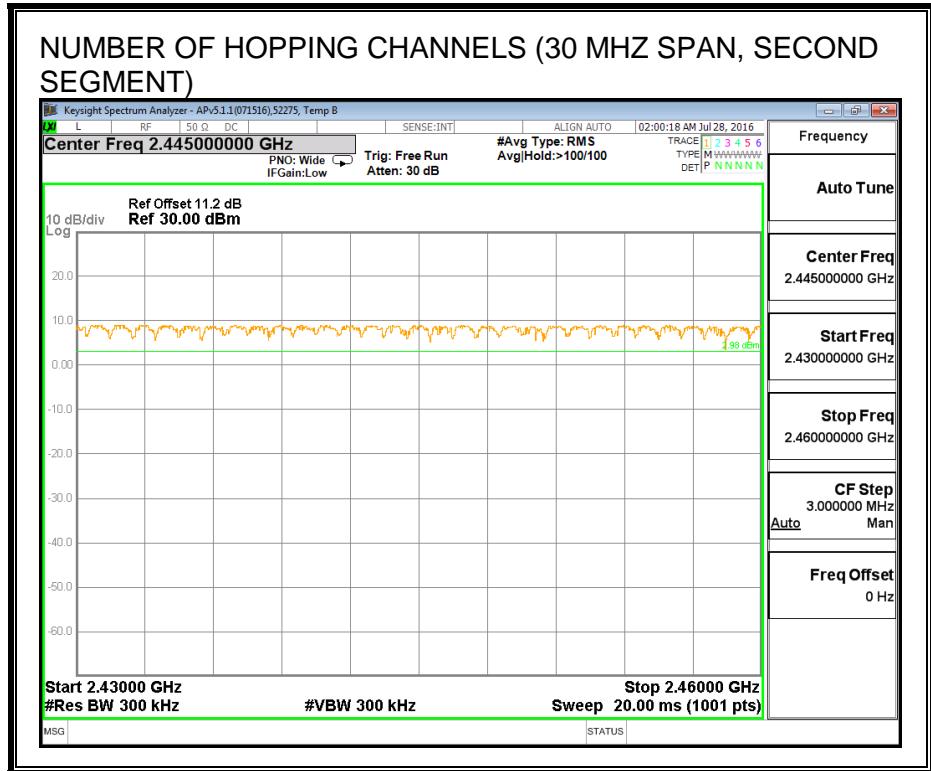

#### 7.7.4. AVERAGE TIME OF OCCUPANCY

##### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

##### RESULTS


###### 8PSK (EDR) Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
3DH1	0.400	32	0.128	0.4	-0.272
3DH3	1.074	17	0.183	0.4	-0.217
3DH5	2.884	12	0.346	0.4	-0.054


PULSE WIDTH - 3DH1

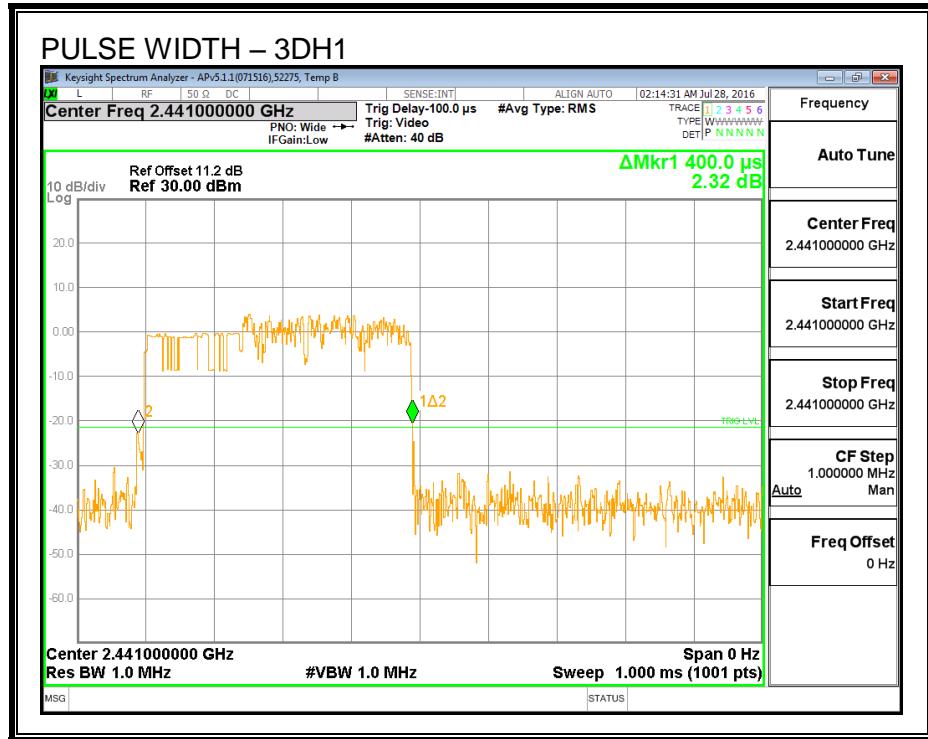


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH1

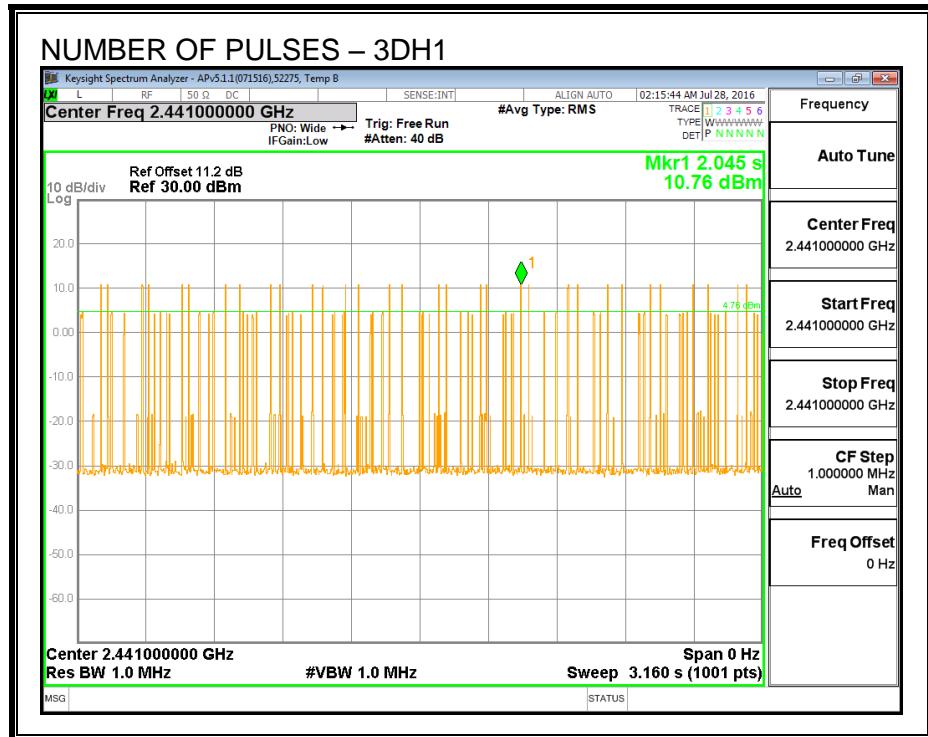


PULSE WIDTH – 3DH3

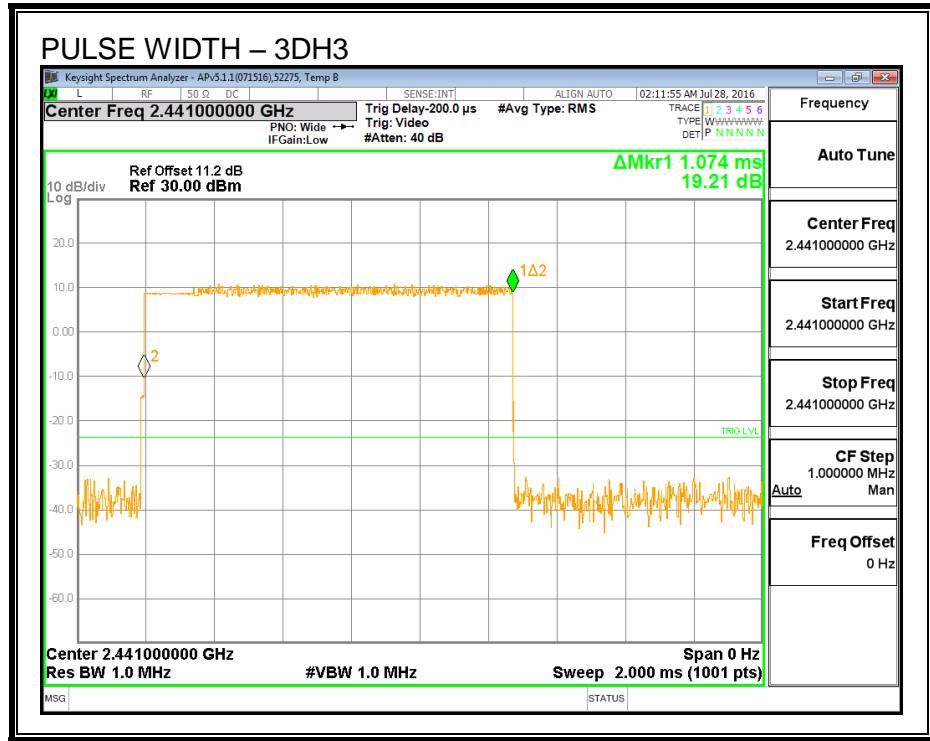


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH3

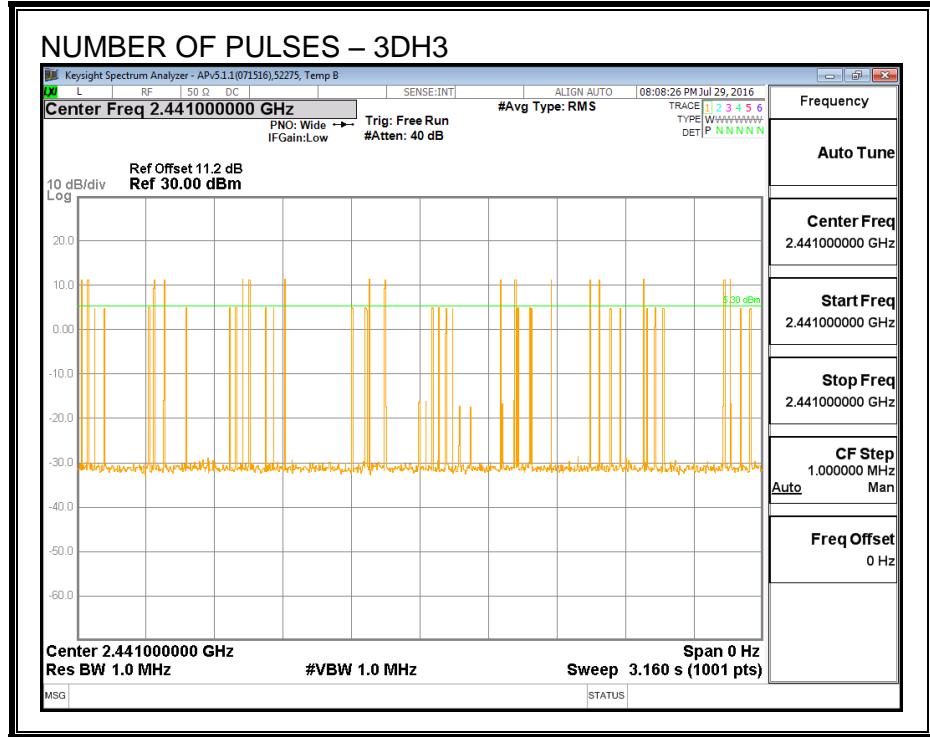

### PULSE WIDTH – 3DH5

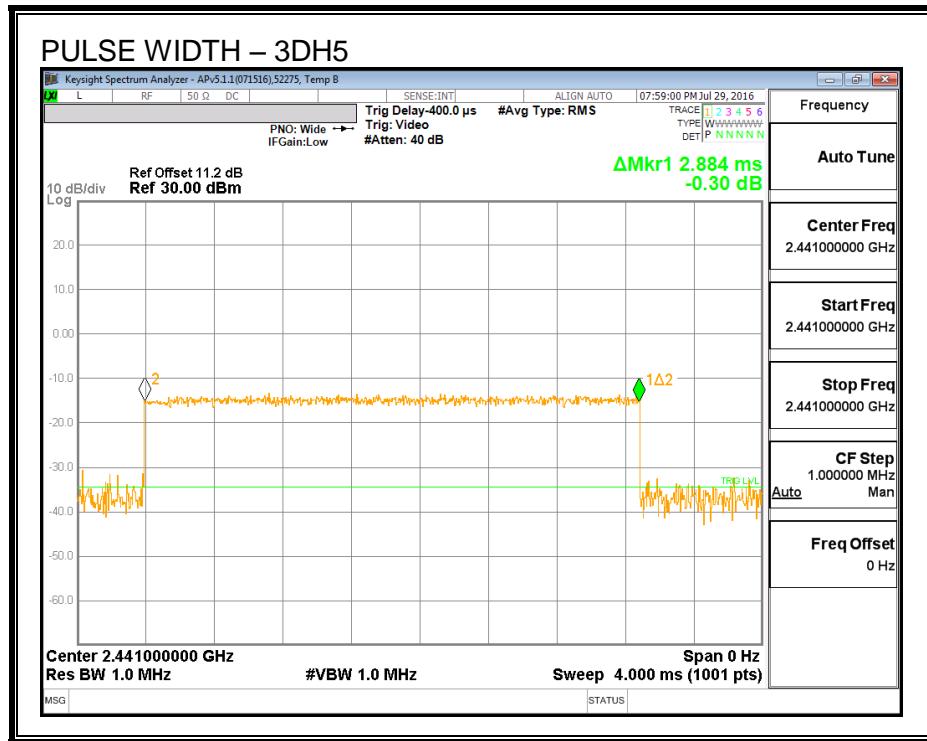

### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH5

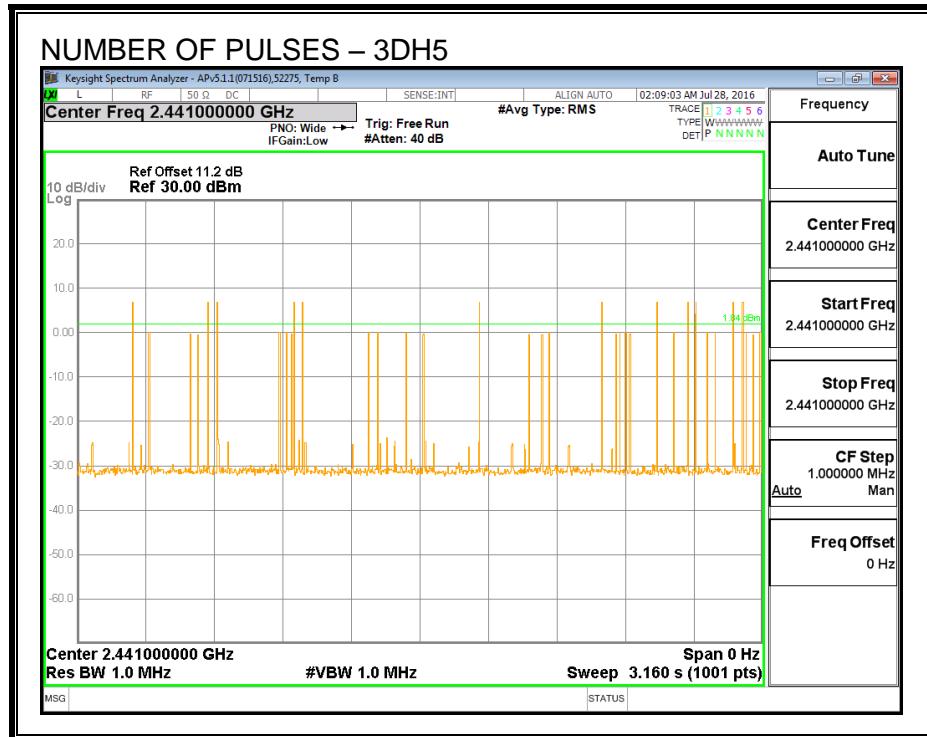

## 7.7.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

### RESULTS

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.55	21	-10.42
Middle	2441	10.69	21	-10.28
High	2480	10.62	21	-10.35

## 7.7.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

<b>ID:</b>	52275	<b>Date:</b>	7/21/16
------------	-------	--------------	---------

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power (dBm)</b>
Low	2402	8.29
Middle	2441	8.45
High	2480	8.41

## 7.7.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### RESULTS



**SPURIOUS EMISSIONS, LOW CHANNEL**

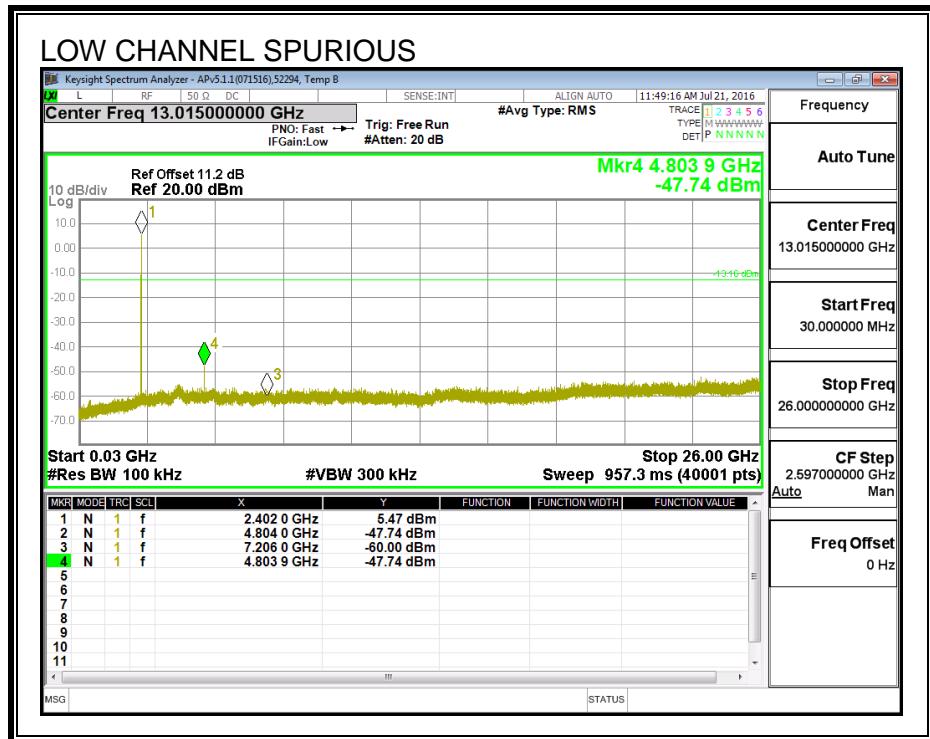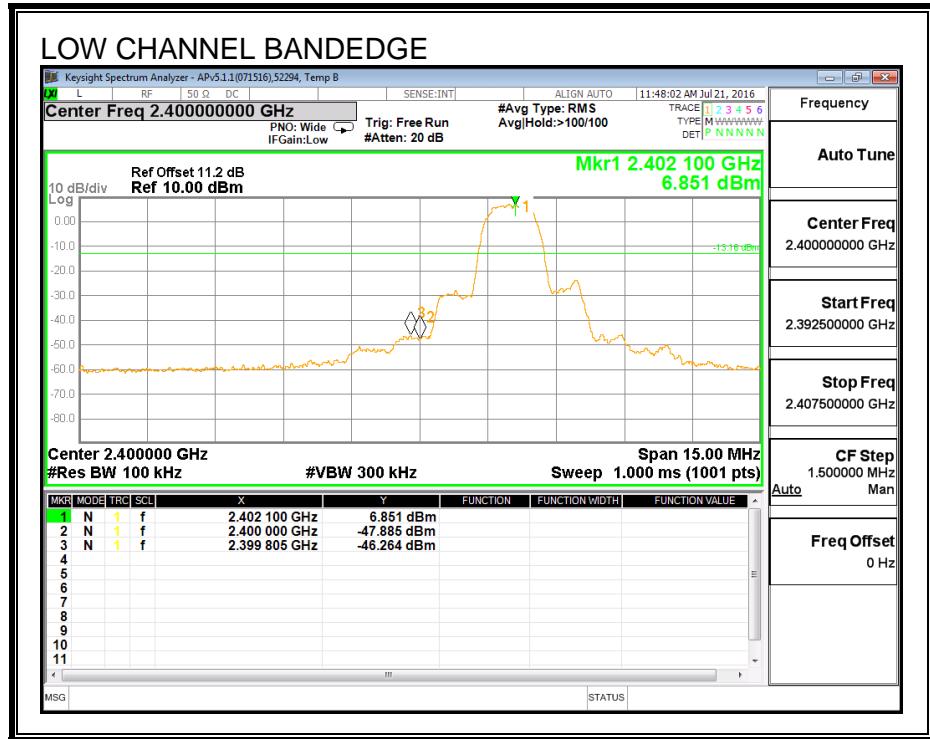



**SPURIOUS EMISSIONS, MID CHANNEL**

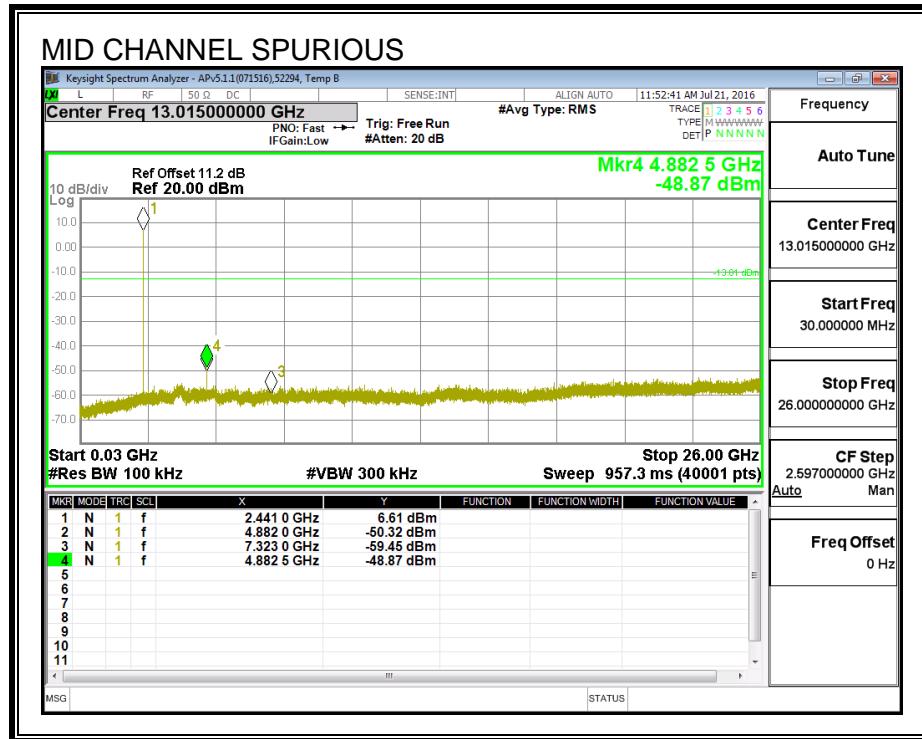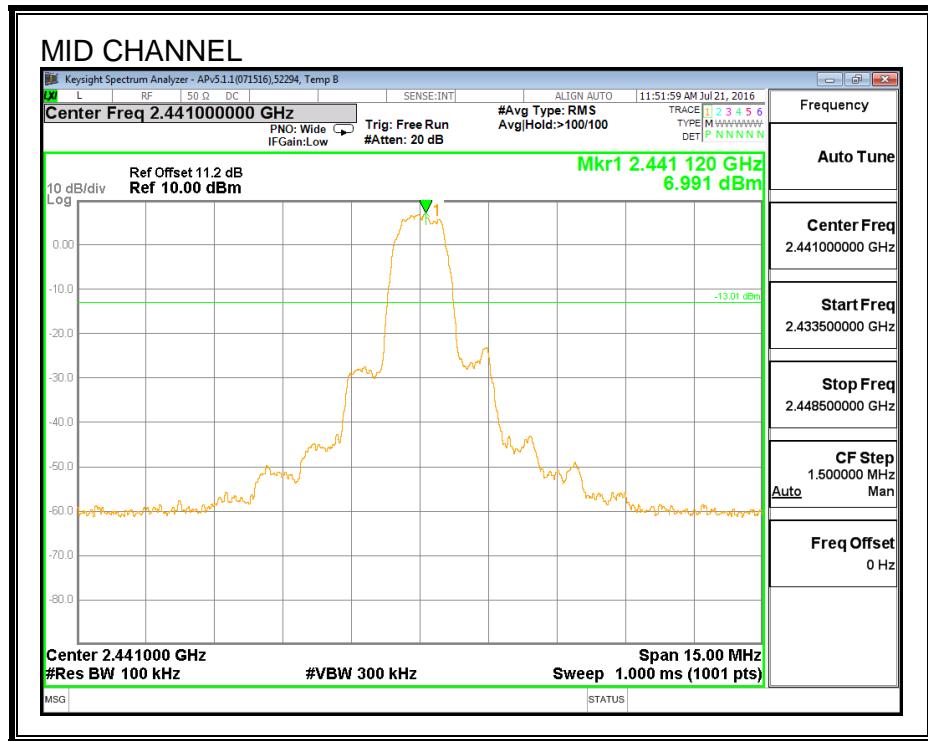

## SPURIOUS EMISSIONS, HIGH CHANNEL

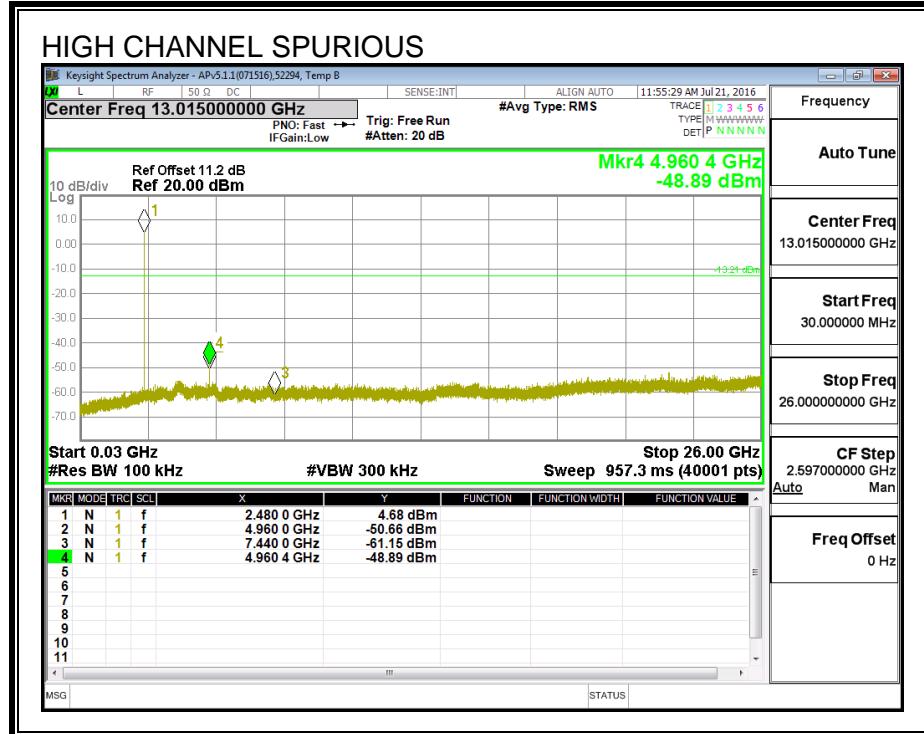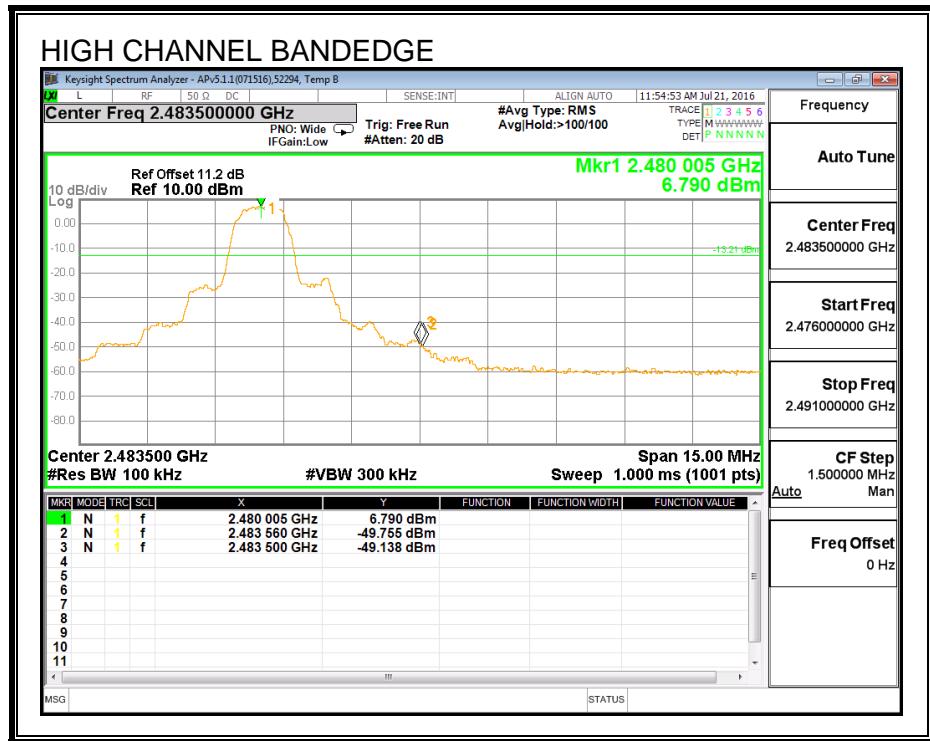

## SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

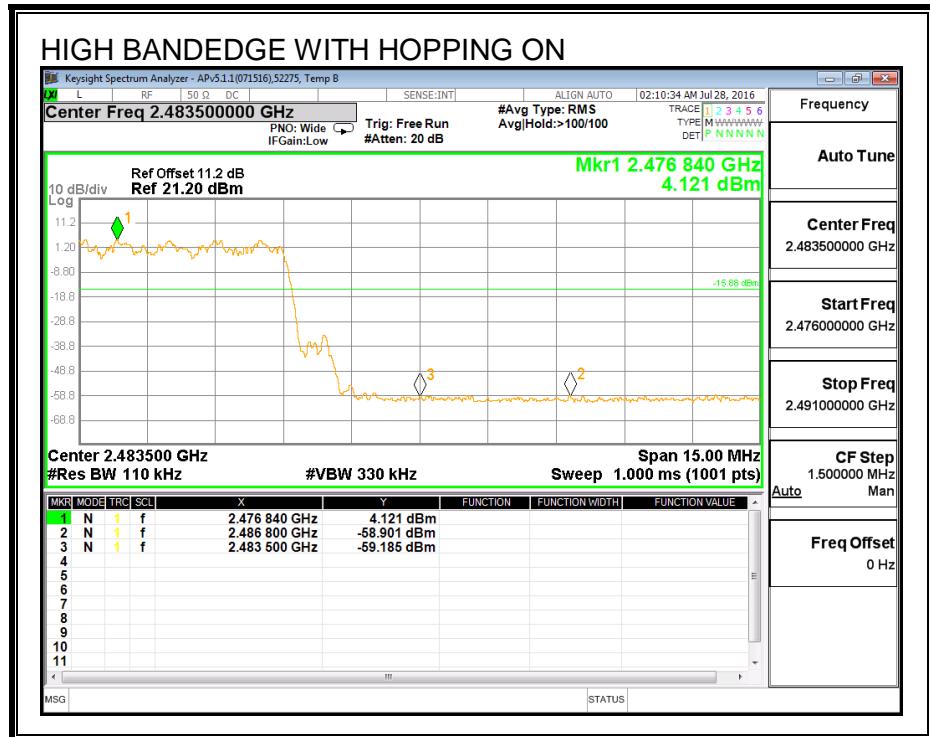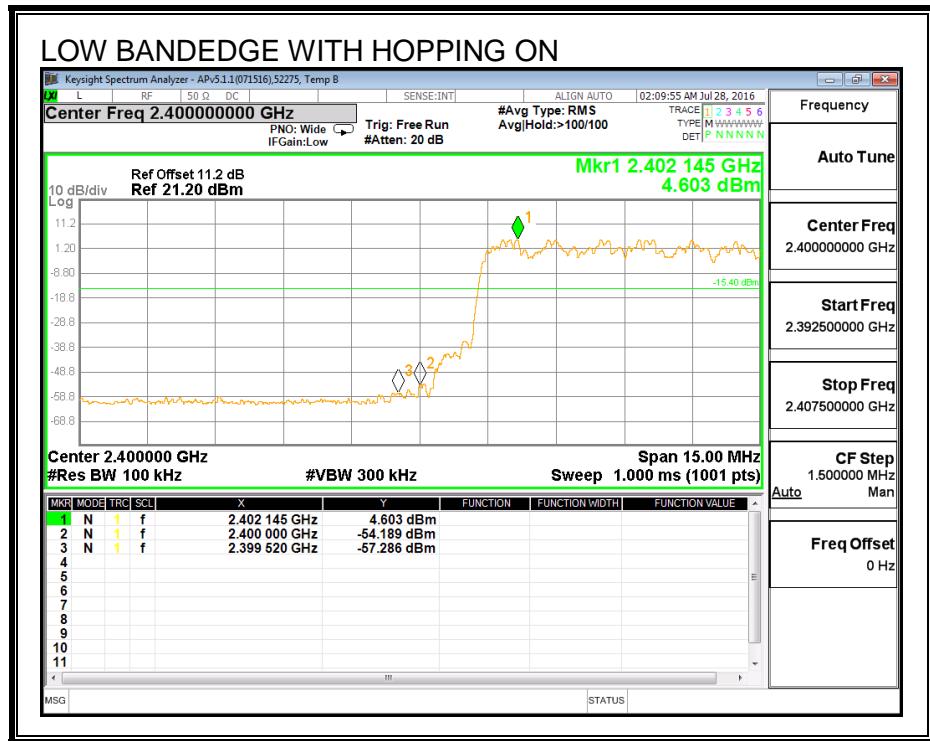

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final scans above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T (10 Hz) video bandwidth with peak detector for average measurements.

PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak → this is a note from Radiated automation software. When the frequency is below 1G, software is using RB=100kHz; when the frequency is above 1G, software is using RB=1MHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

#### RESULTS

## 8.2. TRANSMITTER ABOVE 1 GHz

### 8.2.1. HIGH POWER MODE BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

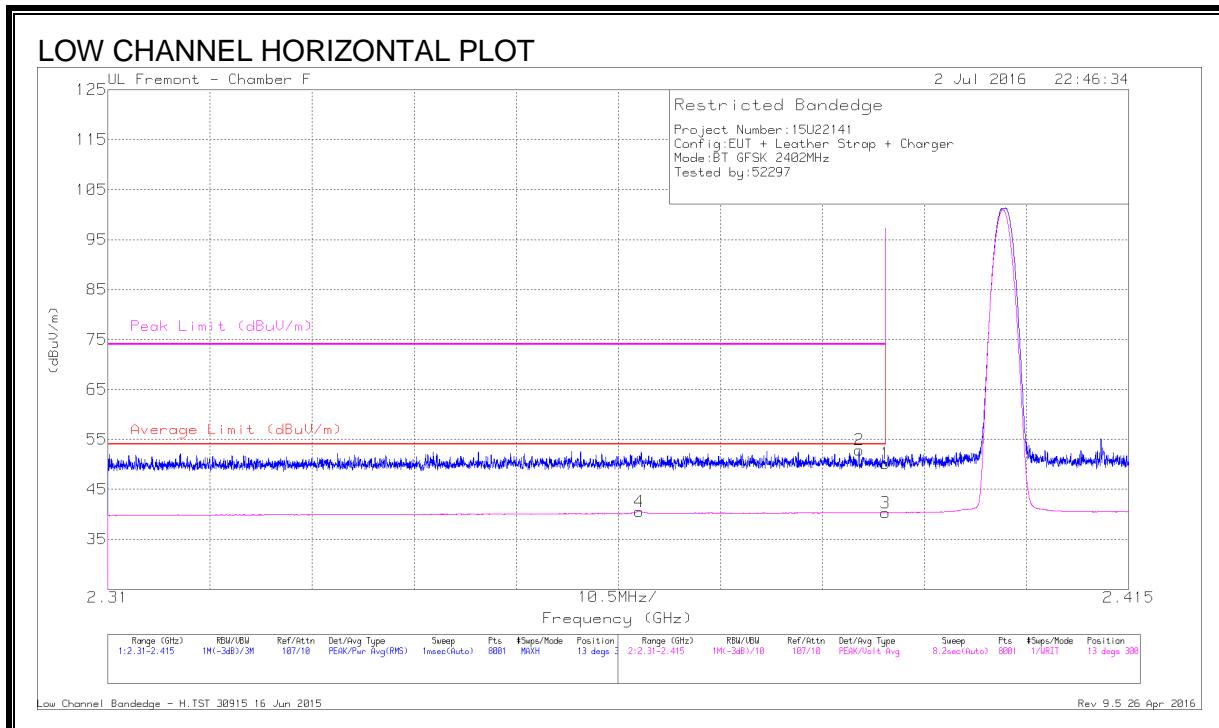

#### DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.98	Pk	32.1	-20.9	50.18	-	-	74	-23.82	13	300	H
2	* 2.387	41.68	Pk	32.1	-20.9	52.88	-	-	74	-21.12	13	300	H
3	* 2.39	29.11	VA1T	32.1	-20.9	40.31	54	-13.69	-	-	13	300	H
4	* 2.365	29.46	VA1T	32	-20.9	40.56	54	-13.44	-	-	13	300	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

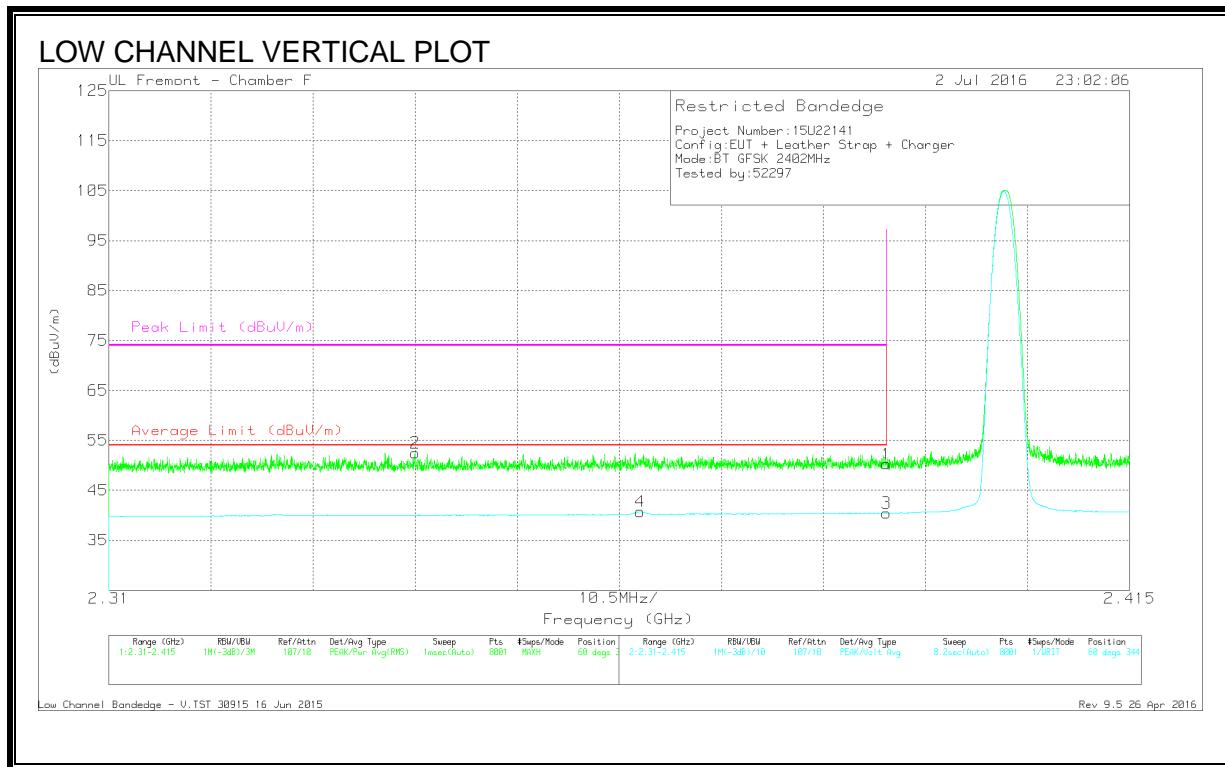

**DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polari ty
1	* 2.39	39.05	Pk	32.1	-20.9	50.25	-	-	74	-23.75	60	344	V
2	* 2.341	41.49	Pk	31.9	-20.9	52.49	-	-	74	-21.51	60	344	V
3	* 2.39	29.25	VA1T	32.1	-20.9	40.45	54	-13.55	-	-	60	344	V
4	* 2.365	29.63	VA1T	32	-20.9	40.73	54	-13.27	-	-	60	344	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

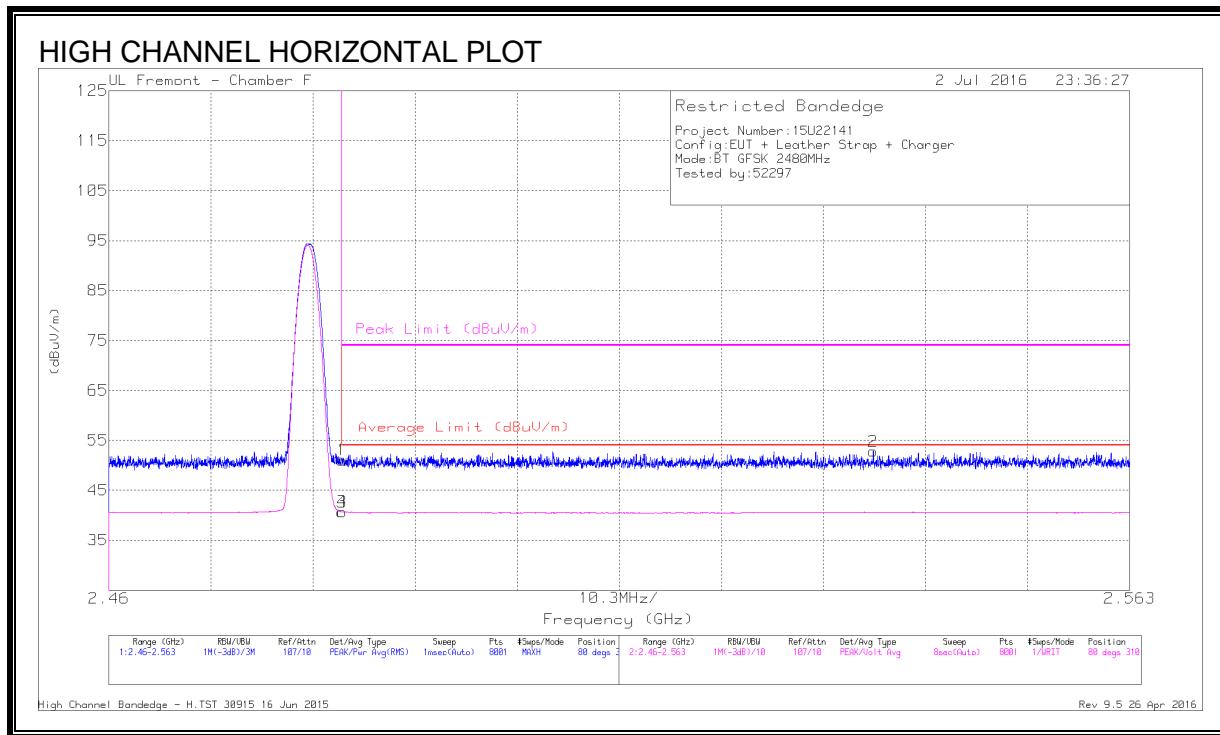

**DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filter/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin	Peak (dB)	Peak Margin (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.76	Pk	32.3	-21	51.06	-	-	74	-22.94	80	310	H	
2	2.537	41.43	Pk	32.2	-20.8	52.83	-	-	74	-21.17	80	310	H	
3	* 2.484	29.39	VA1T	32.3	-21	40.69	54	-13.31	-	-	80	310	H	
4	* 2.484	29.41	VA1T	32.3	-21	40.71	54	-13.29	-	-	80	310	H	

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

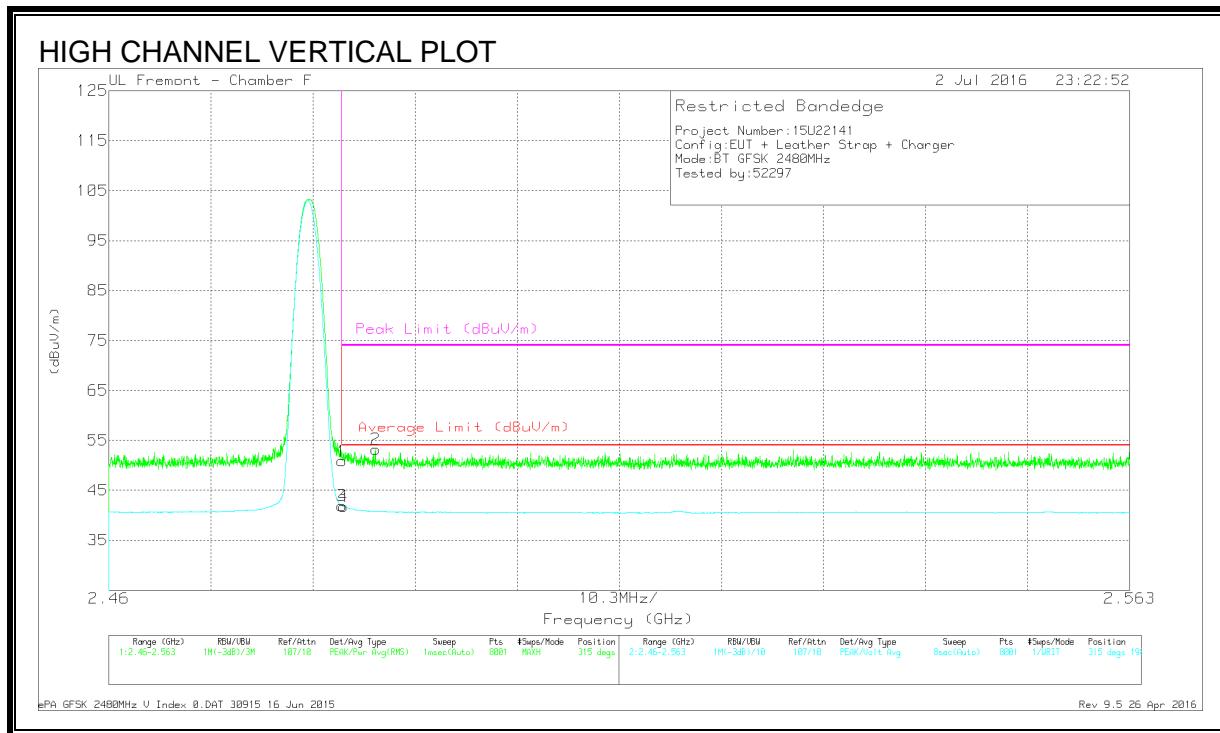

**DATA**



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl /Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polari ty
1	* 2.484	39.56	Pk	32.3	-21	50.86	-	-	74	-23.14	315	198	V
2	* 2.487	41.83	Pk	32.3	-20.9	53.23	-	-	74	-20.77	315	198	V
3	* 2.484	30.63	VA1T	32.3	-21	41.93	54	-12.07	-	-	315	198	V
4	* 2.484	30.5	VA1T	32.3	-21	41.8	54	-12.20	-	-	315	198	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## HARMONICS AND SPURIOUS EMISSIONS

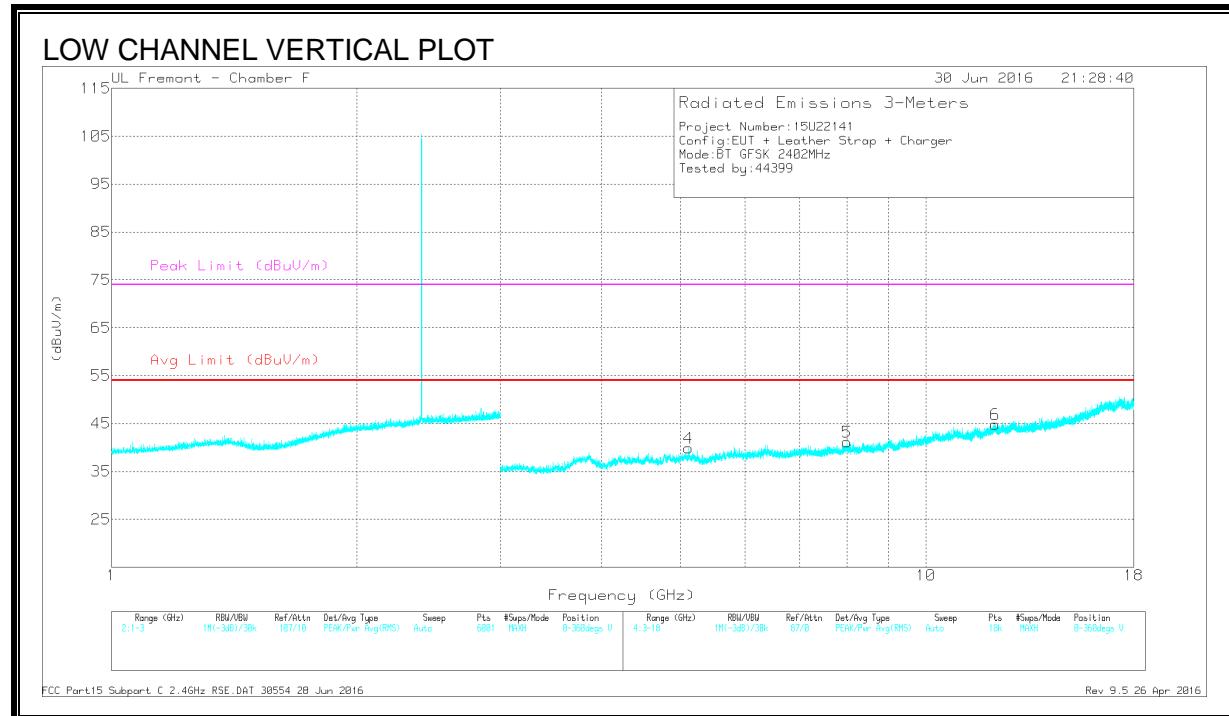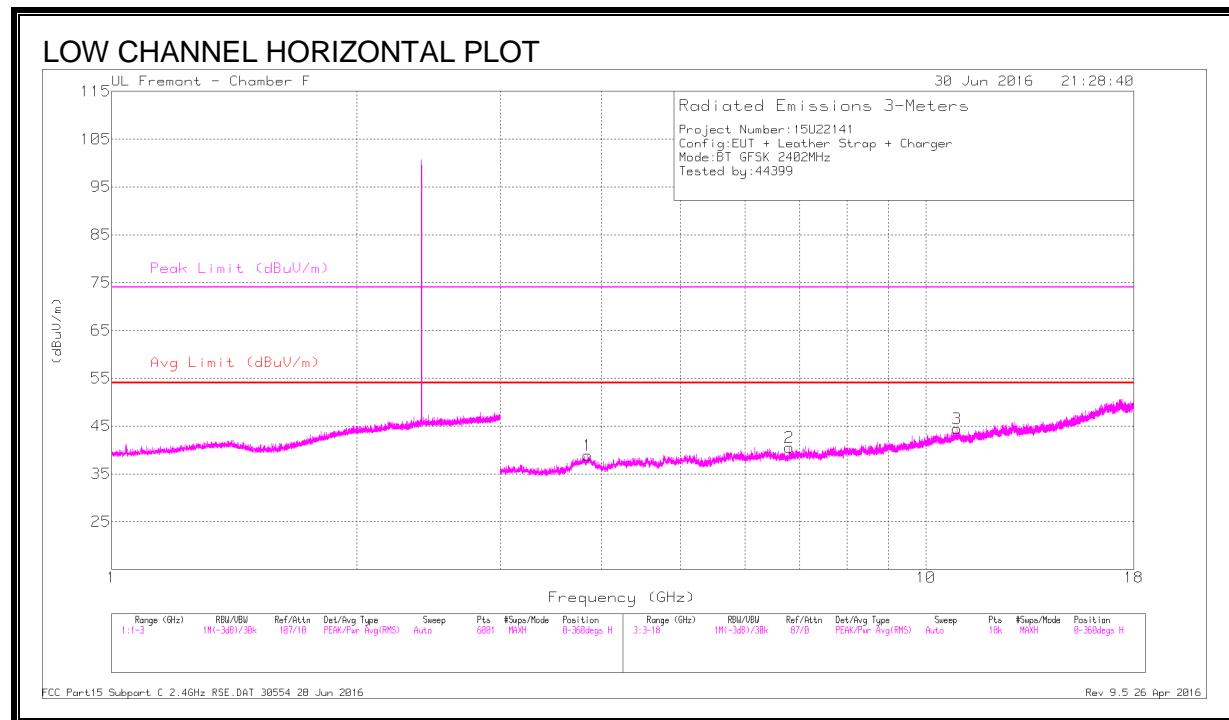

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.847	37.57	PKFH	33.4	-28.2	42.77	-	-	74	-31.23	194	131	H
	* 3.846	26.43	VA1T	33.4	-28.2	31.63	54	-22.37	-	-	194	131	H
2	6.793	35.82	PKFH	35.4	-26.7	44.52	-	-	-	-	178	198	H
	6.79	24.58	VA1T	35.4	-26.6	33.38	-	-	-	-	178	198	H
3	* 10.912	32.51	PKFH	37.9	-21.5	48.91	-	-	74	-25.09	183	169	H
	* 10.908	21.57	VA1T	37.9	-21.5	37.97	54	-16.03	-	-	183	169	H
4	* 5.112	36.57	PKFH	34.2	-27.1	43.67	-	-	74	-30.33	280	212	V
	* 5.114	25.32	VA1T	34.2	-27.1	32.42	54	-21.58	-	-	280	212	V
5	8.009	34.72	PKFH	35.8	-24.3	46.22	-	-	-	-	228	193	V
	8.008	23.37	VA1T	35.8	-24.3	34.87	-	-	-	-	228	193	V
6	* 12.157	33.1	PKFH	38.9	-21.4	50.6	-	-	74	-23.4	245	184	V
	* 12.157	22.09	VA1T	38.9	-21.4	39.59	54	-14.41	-	-	245	184	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration