



CERTIFICATION TEST REPORT

Report Number. : 11708541-E10V3

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1863, A1907

FCC ID : BCG-E3159A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 27

Date Of Issue:
August 10, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	7/24/2017	Initial Review	--
V2	7/28/2017	Updated Section 5.3 and Section 7	Anthony Cerezo
V3	8/10/2017	Address TCB Requests	Mengistu Mekuria

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. DIFFERENCE IN MODEL NUMBER.....	8
5.3. MAXIMUM OUTPUT POWER.....	8
5.3.1. LAT 1.....	8
5.3.2. UAT 1	10
5.4. SOFTWARE AND FIRMWARE.....	12
5.5. MAXIMUM ANTENNA GAIN.....	12
5.6. WORST-CASE CONFIGURATION AND MODE	12
5.7. DESCRIPTION OF TEST SETUP.....	13
6. TEST AND MEASUREMENT EQUIPMENT	15
7. TRANSMITTER OUTPUT POWER (CONDUCTED AND EIRP).....	16
7.1. LAT 1.....	17
7.1.1. LTE BAND 7	17
7.1.2. LTE BAND 41	22
7.2. UAT 1	28
7.2.1. LTE BAND 7	28
7.2.3. LTE BAND 41	32
8. CONDUCTED TEST RESULTS	38
8.1. OCCUPIED BANDWIDTH	38
8.1.1. LTE BAND 7	41
8.1.2. LTE BAND 41	50
8.2. EMISSION MASK	62
8.2.1. LTE BAND 7	63

8.2.2.	LTE BAND 41	71
8.3.	OUT OF BAND EMISSIONS.....	79
8.3.1.	LTE BAND 7	80
8.3.2.	LTE BAND 41	86
9.	FREQUENCY STABILITY	92
9.1.	LTE BAND 7	93
9.2.	LTE BAND 41	94
10.	PEAK-TO-AVERAGE RATIO	95
10.1.1.	LTE BAND 7.....	95
10.1.2.	LTE BAND 41.....	96
11.	RADIATED TEST RESULTS	97
11.1.	FIELD STRENGTH OF SPURIOUS RADIATION, LAT 1	97
11.1.1.	LTE BAND 7.....	99
11.1.2.	LTE BAND 41.....	103
11.2.	FIELD STRENGTH OF SPURIOUS RADIATION, UAT 1.....	107
11.2.1.	LTE BAND 7.....	107
11.2.2.	LTE BAND 41.....	111
12.	SETUP PHOTOS	115

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A1863, A1907

SERIAL NUMBER: C7CTW01UJ8V9


DATE TESTED: APRIL 26, 2017 – JUNE 21, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC CFR47 PART 27	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



MENGISTU MEKURIA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:



TINA CHU
TEST ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, FCC CFR 47 Part 2, FCC KDB 971168 D01 v02r02, KDB 971168 D02 v01, Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC:22541-1)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:22541-2)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)
	☐ Chamber G (IC:22541-4)
	☐ Chamber H (IC:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Equipment Under Test is a mobile phone with GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA and CDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. DIFFERENCE IN MODEL NUMBER

Model A1863 and A1907 are identical. Two model numbers are allocated for marketing and logistic purpose only.

5.3. MAXIMUM OUTPUT POWER

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations EIRP output powers as follows:

5.3.1. LAT 1

OUTPUT POWER FOR LTE BAND 7

Part 27 / RSS199 LTE Band 7				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
10+20	2500 - 2570	QPSK	23.4	218.8
		16QAM	22.3	169.8
		64QAM	20.6	114.8
20+10		QPSK	23.1	204.2
		16QAM	21.9	154.9
		64QAM	20.2	104.7
15+15		QPSK	23.4	218.8
		16QAM	22.1	162.2
		64QAM	20.8	120.2
15+20		QPSK	23.4	218.8
		16QAM	22.4	173.8
		64QAM	20.4	109.6
20+15		QPSK	23.1	204.2
		16QAM	21.9	154.9
		64QAM	20.2	104.7
20+20		QPSK	23.1	204.2
		16QAM	22.0	158.5
		64QAM	20.2	104.7

OUTPUT POWER FOR LTE BAND 41

Part 27 / RSS199 LTE Band 41				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
5+20	2496-2690	QPSK	23.3	213.8
		16QAM	22.5	177.8
		64QAM	20.5	112.2
20+5		QPSK	23.4	218.8
		16QAM	22.4	173.8
		64QAM	20.2	104.7
10+20		QPSK	23.3	213.8
		16QAM	22.1	162.2
		64QAM	20.2	104.7
20+10		QPSK	23.4	218.8
		16QAM	22.3	169.8
		64QAM	20.5	112.2
15+15		QPSK	23.4	218.8
		16QAM	22.7	186.2
		64QAM	20.3	107.2
15+20		QPSK	23.4	218.8
		16QAM	22.4	173.8
		64QAM	20.6	114.8
20+15		QPSK	23.4	218.8
		16QAM	22.4	173.8
		64QAM	20.6	114.8
20+20		QPSK	23.5	223.9
		16QAM	22.5	177.8
		64QAM	20.7	117.5

5.3.2. UAT 1

OUTPUT POWER FOR LTE BAND 7

Part 27 / RSS199 LTE Band 7				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
10+20	2500 - 2570	QPSK	20.5	112.2
		16QAM	19.6	91.2
		64QAM	18.0	63.1
20+10		QPSK	20.6	114.8
		16QAM	19.6	91.2
		64QAM	18.0	63.1
15+15		QPSK	20.7	117.5
		16QAM	19.6	91.2
		64QAM	18.1	64.6
15+20		QPSK	20.7	117.5
		16QAM	19.6	91.2
		64QAM	18.0	63.1
20+15		QPSK	20.6	114.8
		16QAM	19.6	91.2
		64QAM	18.2	66.1
20+20		QPSK	20.7	117.5
		16QAM	19.6	91.2
		64QAM	18.2	66.1

OUTPUT POWER FOR LTE BAND 41

Part 27 / RSS199 LTE Band 41				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
5+20	2496-2690	QPSK	21.5	141.3
		16QAM	20.8	120.2
		64QAM	18.7	74.1
20+5		QPSK	21.4	138.0
		16QAM	20.5	112.2
		64QAM	18.7	74.1
10+20		QPSK	21.5	141.3
		16QAM	20.8	120.2
		64QAM	18.7	74.1
20+10		QPSK	21.5	141.3
		16QAM	20.5	112.2
		64QAM	18.6	72.4
15+15		QPSK	21.6	144.5
		16QAM	20.6	114.8
		64QAM	18.6	72.4
15+20		QPSK	21.5	141.3
		16QAM	20.6	114.8
		64QAM	18.7	74.1
20+15		QPSK	21.5	141.3
		16QAM	20.7	117.5
		64QAM	18.7	74.1
20+20		QPSK	21.5	141.3
		16QAM	20.5	112.2
		64QAM	18.7	74.1

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.32.00.

5.5. MAXIMUM ANTENNA GAIN

Please see table below:

LTE BANDS	LAT 1 Antenna Gain (dBi)	UAT 1 Antenna Gain (dBi)
LTE Band 7, 2500 – 2570 MHz	-0.38	2.17
LTE Band 41, 2496 – 2690 MHz	-0.37	2.22

5.6. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE dual carrier Bands of: Band 7, and Band 41.

The EUT was investigated in three orthogonal orientations X/Y/Z on both LAT 1 and UAT 1 antennas. For LAT 1 antenna, it was determined that X (Flatbed) orientation was worst-case orientation for all bands without AC/DC adapter, headphones, or laptop.

For UAT 1 antenna, it was determined that Y (Landscape) orientation was worst-case orientation for all bands without AC/DC adapter, headphones, or laptop.

Radiated spurious emissions were investigated below 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz-1GHz.

Tests were performed on the conducted test at LAT 1 antenna as worst case since it has higher output powers. Only output power and occupied bandwidth were performed on the 64QAM due to power is lower than QPSK/16QAM.

All of the test modes for each test items are the worst case configuration after investigation.

For simultaneous transmission of multiple channels in the 2.4GHz and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC/DC adapter	HP	HNSTNN-DA40	WDWR70BAR9AKS8
Laptop	HP	HP ProBook 450 G2	CND5367Z97


I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US 115V	Un-shielded	2.0m	N/A
2	USB	1	DC	Un-shielded	1.0m	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6m	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2m	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5m	NA

CONDUCTED SETUP

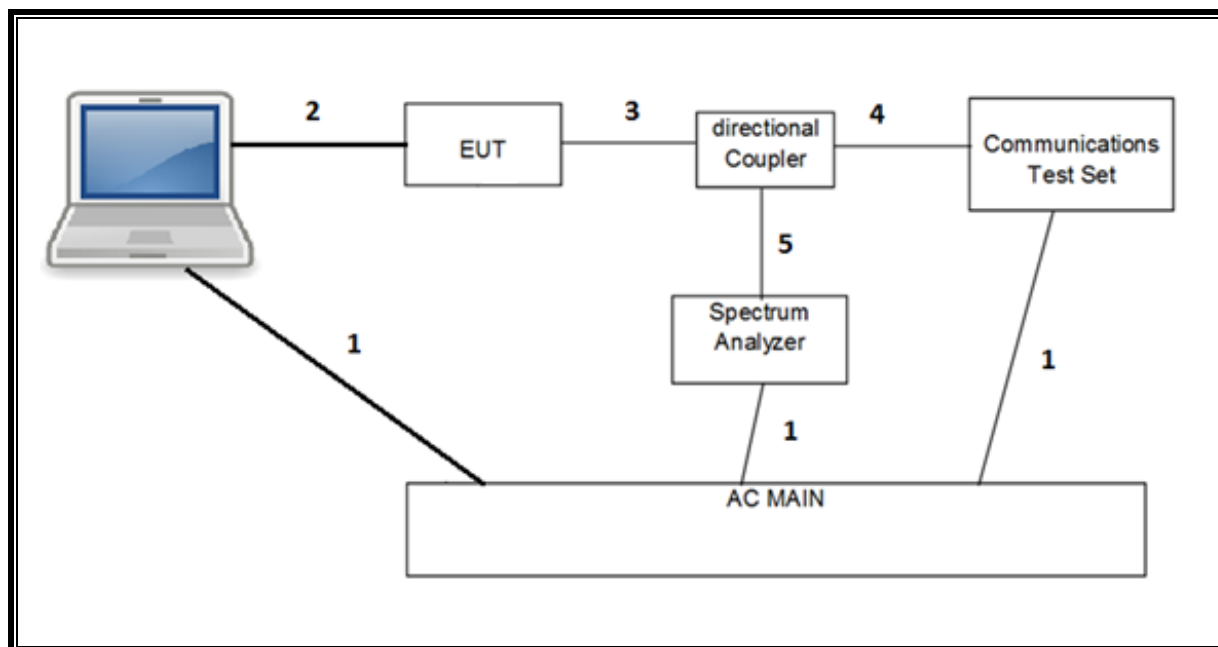

RADIATED SETUP

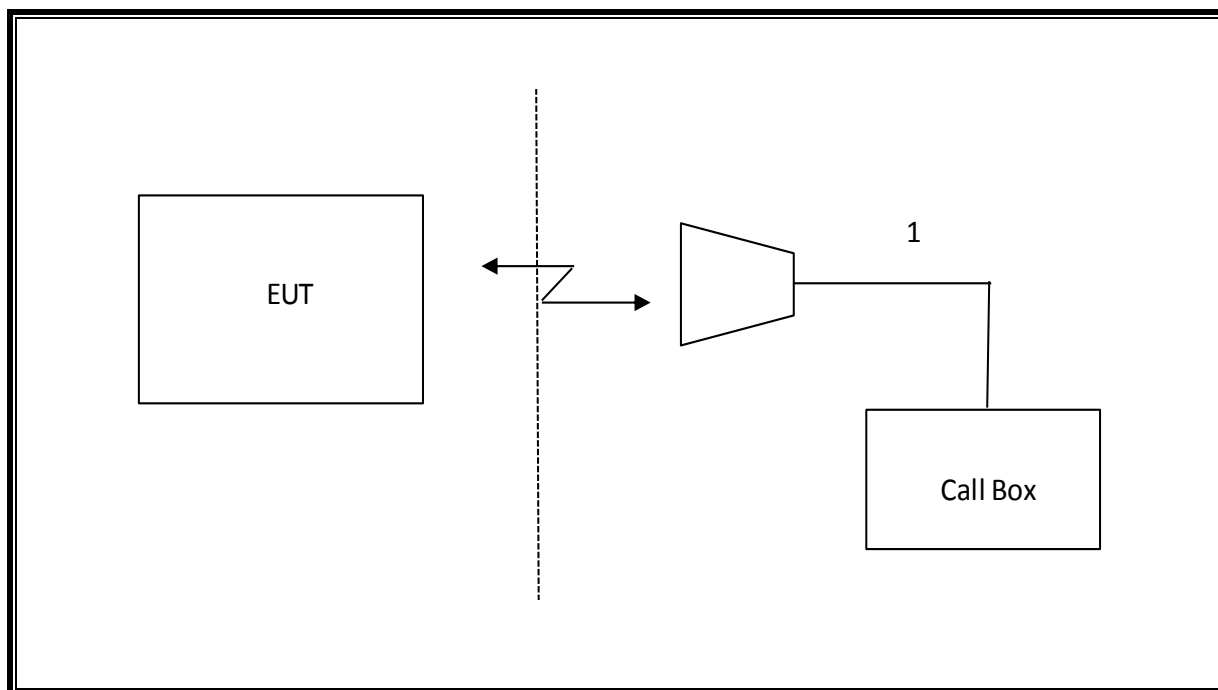

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindaren	3117	T344	4/20/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T407	4/14/2018
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T286	6/2/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-	T740	11/29/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/14/2017
Antenna, Horn 1-18GHz	ETS Lindaren	3117	T300	11/10/17
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T426	9/23/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-	T243	10/11/2017
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	6/20/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1613	9/23/2017
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	AE0038201512	For connection purpose only
Spectrum Analyzer, PSA 3Hz to 44GHz	Keysight	E4446A	T123	10/20/2017
Directional Coupler	KRYTAR	152610	T1536	4/24/2018
Directional Coupler	KRYTAR	152610	T1538	4/24/2018
*Power Meter, P-series single channel	Keysight	N1912A	T1245	5/3/2017
Power Meter, P-series single channel	Keysight	N1912A	T1245	4/26/2018
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight	N1921A	T1227	8/12/2017
Filter, HPF 3.0GHz	MICROTRONICS	HPM17543	T487	1/28/2018
*Filter, HPF 1.2GHz	Micro-Tronics	WHKX1.2/15G-6ST	T1182	5/31/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T1210	6/30/2017
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T959	7/9/2017
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T971	8/5/2017
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	9/10/2017
Antenna, Horn 1-18GHz	Emco	3115	T59	11/18/2017
Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	4/29/2018
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T404	7/5/2017
*Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	6/16/2017
Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640	T90	8/19/2017
Spectrum Analyzer	Keysight	8564E	T106	9/7/2017
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T1616	12/12/2017

NOTE: Equipment that calibrated during the testing period was set for test after the calibration.

*Testing is completed before equipment expiration date.

7. TRANSMITTER OUTPUT POWER (CONDUCTED AND EIRP)

RULE PART(S)

FCC: §2.1046, §27.50

EIRP LIMIT

FCC 27.50 (h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

3GPP TR 36.827, TR.36 830 and TR 36.831

ANSI C63.26:2015

KDB 971168 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULT

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and EIRP output powers as follows:

7.1. LAT 1

7.1.1. LTE BAND 7

ID:	52297	Date:	5/31/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 7 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.38									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
10MHz / 20MHz	2505.5	2519.9	QPSK	1	49	1	0	23.6	23.2	33.0	-9.8
				50	0	100	0	21.6	21.3	33.0	-11.8
			16QAM	1	49	1	0	22.5	22.1	33.0	-10.9
				50	0	100	0	20.7	20.3	33.0	-12.7
			64QAM	1	49	1	0	20.6	20.2	33.0	-12.8
				50	0	100	0	20.6	20.2	33.0	-12.8
	2525.6	2540.0	QPSK	1	49	1	0	23.7	23.3	33.0	-9.7
				50	0	100	0	21.6	21.2	33.0	-11.8
			16QAM	1	49	1	0	22.6	22.3	33.0	-10.8
				50	0	100	0	20.6	20.2	33.0	-12.8
			64QAM	1	49	1	0	21.0	20.6	33.0	-12.4
				50	0	100	0	20.9	20.5	33.0	-12.5
	2545.6	2560.0	QPSK	1	49	1	0	23.7	23.4	33.0	-9.7
				50	0	100	0	21.6	21.2	33.0	-11.8
			16QAM	1	49	1	0	22.2	21.8	33.0	-11.2
				50	0	100	0	20.6	20.2	33.0	-12.8
			64QAM	1	49	1	0	20.6	20.2	33.0	-12.8
				50	0	100	0	20.7	20.3	33.0	-12.7

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		-0.38									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2510.0	2524.4	QPSK	1	99	1	0	23.5	23.1	33.0	-9.9
				1	0	1	49	14.9	14.6	33.0	-18.5
				100	0	50	0	21.8	21.4	33.0	-11.6
			16QAM	1	99	1	0	22.3	21.9	33.0	-11.1
				1	0	1	49	14.7	14.3	33.0	-18.7
				100	0	50	0	20.9	20.5	33.0	-12.5
			64QAM	1	99	1	0	20.5	20.1	33.0	-12.9
				1	0	1	49	14.6	14.3	33.0	-18.8
				100	0	50	0	20.6	20.2	33.0	-12.8
	2530.1	2544.5	QPSK	1	99	1	0	23.2	22.9	33.0	-10.2
				1	0	1	49	14.8	14.4	33.0	-18.6
				100	0	50	0	21.8	21.4	33.0	-11.6
			16QAM	1	99	1	0	22.1	21.7	33.0	-11.3
				1	0	1	49	14.7	14.3	33.0	-18.7
				100	0	50	0	20.8	20.4	33.0	-12.6
			64QAM	1	99	1	0	20.4	20.0	33.0	-13.0
				1	0	1	49	14.7	14.3	33.0	-18.7
				100	0	50	0	20.6	20.2	33.0	-12.8
	2550.1	2564.5	QPSK	1	99	1	0	23.4	23.0	33.0	-10.0
				1	0	1	49	14.8	14.4	33.0	-18.6
				100	0	50	0	21.7	21.4	33.0	-11.7
			16QAM	1	99	1	0	22.2	21.8	33.0	-11.2
				1	0	1	49	14.6	14.2	33.0	-18.8
				100	0	50	0	20.8	20.4	33.0	-12.6
			64QAM	1	99	1	0	20.6	20.2	33.0	-12.8
				1	0	1	49	14.6	14.2	33.0	-18.8
				100	0	50	0	20.6	20.2	33.0	-12.8

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.38									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2507.5	2522.5	QPSK	1	74	1	0	23.7	23.3	33.0	-9.7
				75	0	75	0	21.6	21.2	33.0	-11.8
			16QAM	1	74	1	0	22.2	21.8	33.0	-11.2
				75	0	75	0	20.6	20.2	33.0	-12.8
			64QAM	1	74	1	0	20.6	20.2	33.0	-12.8
				75	0	75	0	20.8	20.4	33.0	-12.6
	2527.5	2542.5	QPSK	1	74	1	0	23.5	23.1	33.0	-9.9
				75	0	75	0	23.1	22.7	33.0	-10.3
			16QAM	1	74	1	0	22.3	22.0	33.0	-11.1
				75	0	75	0	22.3	21.9	33.0	-11.1
			64QAM	1	74	1	0	21.1	20.7	33.0	-12.3
				75	0	75	0	21.1	20.7	33.0	-12.3
	2547.5	2562.5	QPSK	1	74	1	0	23.8	23.4	33.0	-9.6
				75	0	75	0	21.5	21.1	33.0	-11.9
			16QAM	1	74	1	0	22.5	22.1	33.0	-10.9
				75	0	75	0	20.5	20.2	33.0	-12.9
			64QAM	1	74	1	0	20.6	20.2	33.0	-12.8
				75	0	75	0	20.5	20.1	33.0	-12.9

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.38									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2507.8	2524.9	QPSK	1	74	1	0	23.7	23.4	33.0	-9.7
				75	0	100	0	21.6	21.2	33.0	-11.8
			16QAM	1	74	1	0	22.7	22.4	33.0	-10.7
				75	0	100	0	20.6	20.2	33.0	-12.8
			64QAM	1	74	1	0	20.6	20.2	33.0	-12.8
				75	0	100	0	20.8	20.4	33.0	-12.6
	2525.3	2542.4	QPSK	1	74	1	0	23.6	23.2	33.0	-9.8
				75	0	100	0	21.6	21.2	33.0	-11.8
			16QAM	1	74	1	0	22.7	22.3	33.0	-10.7
				75	0	100	0	20.7	20.3	33.0	-12.7
			64QAM	1	74	1	0	20.5	20.2	33.0	-12.9
				75	0	100	0	20.7	20.3	33.0	-12.7
	2542.9	2560.0	QPSK	1	74	1	0	23.6	23.2	33.0	-9.8
				75	0	100	0	21.5	21.2	33.0	-11.9
			16QAM	1	74	1	0	22.7	22.3	33.0	-10.7
				75	0	100	0	20.5	20.2	33.0	-12.9
			64QAM	1	74	1	0	20.4	20.1	33.0	-13.0
				75	0	100	0	20.6	20.2	33.0	-12.8

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.38									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2510.0	2527.1	QPSK	1	99	1	0	23.4	23.0	33.0	-10.0
				100	0	75	0	21.8	21.5	33.0	-11.6
			16QAM	1	99	1	0	22.2	21.8	33.0	-11.2
				100	0	75	0	20.8	20.4	33.0	-12.6
			64QAM	1	99	1	0	20.6	20.2	33.0	-12.8
				100	0	75	0	20.6	20.2	33.0	-12.8
	2527.6	2544.7	QPSK	1	99	1	0	23.5	23.1	33.0	-9.9
				100	0	75	0	21.8	21.4	33.0	-11.6
			16QAM	1	99	1	0	22.2	21.8	33.0	-11.2
				100	0	75	0	20.8	20.4	33.0	-12.6
			64QAM	1	99	1	0	20.5	20.1	33.0	-12.9
				100	0	75	0	20.6	20.2	33.0	-12.8
	2545.1	2562.2	QPSK	1	99	1	0	23.3	22.9	33.0	-10.1
				100	0	75	0	21.7	21.3	33.0	-11.7
			16QAM	1	99	1	0	22.3	21.9	33.0	-11.1
				100	0	75	0	20.8	20.4	33.0	-12.6
			64QAM	1	99	1	0	20.5	20.1	33.0	-12.9
				100	0	75	0	20.6	20.2	33.0	-12.8

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.38									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2510.0	2529.8	QPSK	1	99	1	0	23.5	23.1	33.0	-9.9
				1	0	1	99	14.8	14.4	33.0	-18.6
				100	0	100	0	21.9	21.5	33.0	-11.5
			16QAM	1	99	1	0	22.3	21.9	33.0	-11.1
				1	0	1	99	14.7	14.3	33.0	-18.7
				100	0	100	0	20.9	20.5	33.0	-12.5
			64QAM	1	99	1	0	20.4	20.0	33.0	-13.0
				1	0	1	99	14.6	14.2	33.0	-18.8
				100	0	100	0	20.6	20.2	33.0	-12.8
	2525.1	2544.9	QPSK	1	99	1	0	23.5	23.1	33.0	-9.9
				1	0	1	99	14.8	14.4	33.0	-18.6
				100	0	100	0	21.8	21.4	33.0	-11.6
			16QAM	1	99	1	0	22.3	22.0	33.0	-11.1
				1	0	1	99	14.6	14.2	33.0	-18.8
				100	0	100	0	20.8	20.4	33.0	-12.6
			64QAM	1	99	1	0	20.4	20.0	33.0	-13.0
				1	0	1	99	14.6	14.2	33.0	-18.8
				100	0	100	0	20.6	20.2	33.0	-12.8
	2540.2	2560.0	QPSK	1	99	1	0	23.4	23.0	33.0	-10.0
				1	0	1	99	14.5	14.2	33.0	-18.9
				100	0	100	0	21.7	21.3	33.0	-11.7
			16QAM	1	99	1	0	22.1	21.8	33.0	-11.3
				1	0	1	99	14.5	14.1	33.0	-18.9
				100	0	100	0	20.7	20.3	33.0	-12.7
			64QAM	1	99	1	0	20.4	20.0	33.0	-13.0
				1	0	1	99	14.5	14.1	33.0	-18.9
				100	0	100	0	20.5	20.1	33.0	-12.9

7.1.2. LTE BAND 41

ID:	52297	Date:	6/10/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (5.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.37									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
5MHz / 20MHz	2499.3	2511.0	QPSK	1	24	1	0	23.7	23.3	33.0	-9.7
				25	0	100	0	21.7	21.3	33.0	-11.7
			16QAM	1	24	1	0	22.6	22.3	33.0	-10.8
				25	0	100	0	20.7	20.3	33.0	-12.7
			64QAM	1	24	1	0	20.4	20.0	33.0	-13.0
				25	0	100	0	20.7	20.3	33.0	-12.7
	2583.8	2595.5	QPSK	1	24	1	0	23.7	23.3	33.0	-9.7
				25	0	100	0	21.8	21.4	33.0	-11.6
			16QAM	1	24	1	0	22.6	22.2	33.0	-10.8
				25	0	100	0	20.9	20.6	33.0	-12.5
			64QAM	1	24	1	0	20.8	20.5	33.0	-12.6
				25	0	100	0	20.8	20.4	33.0	-12.6
	2668.3	2680.0	QPSK	1	24	1	0	23.6	23.3	33.0	-9.8
				25	0	100	0	21.4	21.0	33.0	-12.0
			16QAM	1	24	1	0	22.9	22.5	33.0	-10.5
				25	0	100	0	20.4	20.0	33.0	-13.0
			64QAM	1	24	1	0	20.6	20.3	33.0	-12.8
				25	0	100	0	20.5	20.1	33.0	-12.9

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 5.0MHz)

Antenna Gain (dBi)		-0.37										
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)	
				Size	Offset	Size	Offset					
20MHz / 5MHz	2506.0	2517.7	QPSK	1	99	1	0	23.8	23.4	33.0	-9.6	
				1	0	1	24	15.2	14.8	33.0	-18.2	
				100	0	25	0	21.6	21.3	33.0	-11.7	
			16QAM	1	99	1	0	22.7	22.4	33.0	-10.7	
				1	0	1	24	15.1	14.7	33.0	-18.3	
				100	0	25	0	20.7	20.3	33.0	-12.7	
		64QAM	1	99	1	0	20.6	20.2	33.0	-12.8		
			1	0	1	24	15.0	14.6	33.0	-18.4		
			100	0	25	0	20.5	20.2	33.0	-12.8		
		2590.5	2602.2	QPSK	1	99	1	0	23.7	23.3	33.0	-9.7
					1	0	1	24	15.3	14.9	33.0	-18.1
					100	0	25	0	21.5	21.1	33.0	-11.9
	16QAM			1	99	1	0	22.5	22.1	33.0	-10.9	
				1	0	1	24	15.2	14.8	33.0	-18.2	
				100	0	25	0	20.6	20.2	33.0	-12.8	
	64QAM		1	99	1	0	20.5	20.1	33.0	-12.9		
			1	0	1	24	15.0	14.6	33.0	-18.4		
			100	0	25	0	20.4	20.1	33.0	-13.0		
	2675.0		2686.7	QPSK	1	99	1	0	23.6	23.2	33.0	-9.8
					1	0	1	24	14.7	14.4	33.0	-18.6
					100	0	25	0	21.2	20.9	33.0	-12.1
		16QAM		1	99	1	0	22.2	21.9	33.0	-11.2	
				1	0	1	24	14.6	14.3	33.0	-18.8	
				100	0	25	0	20.3	19.9	33.0	-13.1	
		64QAM	1	99	1	0	20.4	20.0	33.0	-13.0		
			1	0	1	24	14.6	14.2	33.0	-18.8		
			100	0	25	0	20.5	20.1	33.0	-12.9		

OUTPUT POWER FOR LTE BAND 41 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.37									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
10MHz / 20MHz	2501.5	2515.9	QPSK	1	49	1	0	23.6	23.2	33.0	-9.8
				50	0	100	0	21.6	21.3	33.0	-11.8
			16QAM	1	49	1	0	22.5	22.1	33.0	-10.9
				50	0	100	0	20.7	20.3	33.0	-12.7
			64QAM	1	49	1	0	20.4	20.0	33.0	-13.0
				50	0	100	0	20.4	20.0	33.0	-13.0
	2583.6	2598.0	QPSK	1	49	1	0	23.6	23.3	33.0	-9.8
				50	0	100	0	21.5	21.1	33.0	-11.9
			16QAM	1	49	1	0	22.5	22.1	33.0	-10.9
				50	0	100	0	20.5	20.2	33.0	-12.8
			64QAM	1	49	1	0	20.4	20.0	33.0	-13.0
				50	0	100	0	20.6	20.2	33.0	-12.8
	2665.6	2680.0	QPSK	1	49	1	0	23.5	23.1	33.0	-9.9
				50	0	100	0	21.4	21.0	33.0	-12.0
			16QAM	1	49	1	0	22.3	21.9	33.0	-11.1
				50	0	100	0	20.4	20.0	33.0	-13.0
			64QAM	1	49	1	0	20.4	20.1	33.0	-12.9
				50	0	100	0	20.5	20.1	33.0	-12.9

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		-0.37									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2506.0	2520.4	QPSK	1	99	1	0	23.8	23.4	33.0	-9.6
				100	0	50	0	21.6	21.3	33.0	-11.8
			16QAM	1	99	1	0	22.7	22.3	33.0	-10.7
				100	0	50	0	20.7	20.3	33.0	-12.7
			64QAM	1	99	1	0	20.9	20.5	33.0	-12.5
				100	0	50	0	20.8	20.4	33.0	-12.6
	2588.1	2602.5	QPSK	1	99	1	0	23.5	23.1	33.0	-9.9
				100	0	50	0	21.5	21.2	33.0	-11.8
			16QAM	1	99	1	0	22.5	22.1	33.0	-10.9
				100	0	50	0	20.6	20.2	33.0	-12.8
			64QAM	1	99	1	0	20.4	20.1	33.0	-13.0
				100	0	50	0	20.5	20.2	33.0	-12.9
	2670.1	2684.5	QPSK	1	99	1	0	23.4	23.0	33.0	-10.0
				100	0	50	0	21.3	20.9	33.0	-12.1
			16QAM	1	99	1	0	22.4	22.0	33.0	-11.0
				100	0	50	0	20.3	19.9	33.0	-13.1
			64QAM	1	99	1	0	20.8	20.4	33.0	-12.6
				100	0	50	0	20.9	20.5	33.0	-12.5

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.37									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2503.5	2518.5	QPSK	1	74	1	0	23.8	23.4	33.0	-9.6
				75	0	75	0	21.6	21.2	33.0	-11.8
			16QAM	1	74	1	0	23.1	22.7	33.0	-10.3
				75	0	75	0	20.7	20.3	33.0	-12.7
			64QAM	1	74	1	0	20.5	20.1	33.0	-12.9
				75	0	75	0	20.4	20.0	33.0	-13.0
	2585.5	2600.5	QPSK	1	74	1	0	23.8	23.4	33.0	-9.6
				75	0	75	0	21.5	21.1	33.0	-11.9
			16QAM	1	74	1	0	22.2	21.8	33.0	-11.2
				75	0	75	0	20.5	20.1	33.0	-12.9
			64QAM	1	74	1	0	20.5	20.1	33.0	-12.9
				75	0	75	0	20.6	20.3	33.0	-12.7
	2667.5	2682.5	QPSK	1	74	1	0	23.7	23.3	33.0	-9.7
				75	0	75	0	21.3	21.0	33.0	-12.1
			16QAM	1	74	1	0	22.0	21.7	33.0	-11.3
				75	0	75	0	20.3	20.0	33.0	-13.1
			64QAM	1	74	1	0	20.6	20.2	33.0	-12.8
				75	0	75	0	20.6	20.2	33.0	-12.8

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.37									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2503.8	2520.9	QPSK	1	74	1	0	23.8	23.4	33.0	-9.6
				75	0	100	0	21.6	21.2	33.0	-11.8
			16QAM	1	74	1	0	22.6	22.2	33.0	-10.8
				75	0	100	0	20.6	20.3	33.0	-12.7
			64QAM	1	74	1	0	20.7	20.4	33.0	-12.7
				75	0	100	0	21.0	20.6	33.0	-12.4
	2583.3	2600.4	QPSK	1	74	1	0	23.7	23.3	33.0	-9.7
				75	0	100	0	21.5	21.1	33.0	-11.9
			16QAM	1	74	1	0	22.4	22.0	33.0	-11.0
				75	0	100	0	20.5	20.2	33.0	-12.9
			64QAM	1	74	1	0	20.6	20.2	33.0	-12.8
				75	0	100	0	20.6	20.2	33.0	-12.8
	2662.9	2680.0	QPSK	1	74	1	0	23.7	23.3	33.0	-9.7
				75	0	100	0	21.7	21.3	33.0	-11.7
			16QAM	1	74	1	0	22.8	22.4	33.0	-10.6
				75	0	100	0	20.6	20.2	33.0	-12.8
			64QAM	1	74	1	0	20.6	20.2	33.0	-12.8
				75	0	100	0	20.6	20.2	33.0	-12.8

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.37									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2506.0	2523.1	QPSK	1	99	1	0	23.8	23.4	33.0	-9.6
				100	0	75	0	21.7	21.3	33.0	-11.7
			16QAM	1	99	1	0	22.7	22.4	33.0	-10.7
				100	0	75	0	20.6	20.3	33.0	-12.8
			64QAM	1	99	1	0	20.9	20.6	33.0	-12.4
				100	0	75	0	20.5	20.1	33.0	-12.9
	2585.6	2602.7	QPSK	1	99	1	0	23.6	23.3	33.0	-9.7
				100	0	75	0	21.5	21.2	33.0	-11.9
			16QAM	1	99	1	0	22.5	22.2	33.0	-10.8
				100	0	75	0	20.5	20.1	33.0	-12.9
			64QAM	1	99	1	0	20.6	20.2	33.0	-12.8
				100	0	75	0	20.6	20.2	33.0	-12.8
	2665.1	2682.2	QPSK	1	99	1	0	23.5	23.1	33.0	-9.9
				100	0	75	0	21.3	20.9	33.0	-12.1
			16QAM	1	99	1	0	22.4	22.1	33.0	-11.0
				100	0	75	0	20.3	19.9	33.0	-13.1
			64QAM	1	99	1	0	20.7	20.3	33.0	-12.7
				100	0	75	0	20.6	20.3	33.0	-12.7

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.37									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2506.0	2525.8	QPSK	1	99	1	0	23.8	23.5	33.0	-9.5
				1	0	1	99	15.3	14.9	33.0	-18.1
				100	0	100	0	21.7	21.3	33.0	-11.7
			16QAM	1	99	1	0	22.9	22.5	33.0	-10.5
				1	0	1	99	15.2	14.8	33.0	-18.2
				100	0	100	0	20.8	20.4	33.0	-12.6
			64QAM	1	99	1	0	20.6	20.3	33.0	-12.8
				1	0	1	99	14.9	14.6	33.0	-18.5
				100	0	100	0	20.7	20.3	33.0	-12.7
	2583.1	2602.9	QPSK	1	99	1	0	23.8	23.4	33.0	-9.6
				1	0	1	99	15.1	14.8	33.0	-18.3
				100	0	100	0	21.6	21.2	33.0	-11.8
			16QAM	1	99	1	0	22.5	22.2	33.0	-10.8
				1	0	1	99	15.0	14.6	33.0	-18.4
				100	0	100	0	20.6	20.2	33.0	-12.8
			64QAM	1	99	1	0	20.7	20.4	33.0	-12.7
				1	0	1	99	15.0	14.6	33.0	-18.4
				100	0	100	0	20.8	20.4	33.0	-12.6
	2660.2	2680.0	QPSK	1	99	1	0	23.7	23.3	33.0	-9.7
				1	0	1	99	14.9	14.6	33.0	-18.5
				100	0	100	0	21.3	20.9	33.0	-12.1
			16QAM	1	99	1	0	22.5	22.1	33.0	-10.9
				1	0	1	99	14.7	14.3	33.0	-18.7
				100	0	100	0	20.3	19.9	33.0	-13.1
			64QAM	1	99	1	0	20.9	20.5	33.0	-12.5
				1	0	1	99	15.1	14.8	33.0	-18.3
				100	0	100	0	21.0	20.7	33.0	-12.4

7.2. UAT 1

7.2.1. LTE BAND 7

ID:	52297	Date:	6/10/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 7 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		2.17									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
10MHz / 20MHz	2505.5	2519.9	QPSK	1	49	1	0	18.4	20.5	33.0	-12.5
				50	0	100	0	16.3	18.5	33.0	-14.5
			16QAM	1	49	1	0	17.3	19.5	33.0	-13.6
				50	0	100	0	15.4	17.6	33.0	-15.4
			64QAM	1	49	1	0	15.8	18.0	33.0	-15.0
				50	0	100	0	15.5	17.7	33.0	-15.4
	2525.6	2540.0	QPSK	1	49	1	0	18.4	20.5	33.0	-12.5
				50	0	100	0	16.4	18.6	33.0	-14.4
			16QAM	1	49	1	0	17.4	19.6	33.0	-13.4
				50	0	100	0	15.4	17.6	33.0	-15.4
			64QAM	1	49	1	0	15.6	17.8	33.0	-15.3
				50	0	100	0	15.5	17.7	33.0	-15.4
	2545.6	2560.0	QPSK	1	49	1	0	18.3	20.5	33.0	-12.6
				50	0	100	0	16.4	18.6	33.0	-14.5
			16QAM	1	49	1	0	17.3	19.5	33.0	-13.5
				50	0	100	0	15.4	17.6	33.0	-15.4
			64QAM	1	49	1	0	15.8	18.0	33.0	-15.0
				50	0	100	0	15.7	17.9	33.0	-15.1

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		2.17									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2510.0	2524.4	QPSK	1	99	1	0	18.4	20.6	33.0	-12.5
				1	0	1	49	10.0	12.1	33.0	-20.9
				100	0	50	0	16.5	18.6	33.0	-14.4
			16QAM	1	99	1	0	17.4	19.5	33.0	-13.5
				1	0	1	49	9.7	11.9	33.0	-21.1
				100	0	50	0	15.4	17.6	33.0	-15.4
			64QAM	1	99	1	0	15.5	17.7	33.0	-15.3
				1	0	1	49	9.9	12.1	33.0	-21.0
				100	0	50	0	15.6	17.8	33.0	-15.2
	2530.1	2544.5	QPSK	1	99	1	0	18.4	20.6	33.0	-12.5
				1	0	1	49	9.9	12.1	33.0	-20.9
				100	0	50	0	16.5	18.7	33.0	-14.4
			16QAM	1	99	1	0	17.4	19.5	33.0	-13.5
				1	0	1	49	10.0	12.1	33.0	-20.9
				100	0	50	0	15.5	17.7	33.0	-15.4
			64QAM	1	99	1	0	15.8	18.0	33.0	-15.1
				1	0	1	49	9.7	11.9	33.0	-21.1
				100	0	50	0	15.6	17.8	33.0	-15.2
	2550.1	2564.5	QPSK	1	99	1	0	18.4	20.6	33.0	-12.4
				1	0	1	49	10.0	12.1	33.0	-20.9
				100	0	50	0	16.4	18.5	33.0	-14.5
			16QAM	1	99	1	0	17.4	19.6	33.0	-13.5
				1	0	1	49	9.9	12.1	33.0	-20.9
				100	0	50	0	15.4	17.6	33.0	-15.4
			64QAM	1	99	1	0	15.7	17.9	33.0	-15.1
				1	0	1	49	9.8	12.0	33.0	-21.0
				100	0	50	0	15.6	17.8	33.0	-15.2

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		2.17									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2507.5	2522.5	QPSK	1	74	1	0	18.3	20.5	33.0	-12.5
				75	0	75	0	16.3	18.5	33.0	-14.6
			16QAM	1	74	1	0	17.3	19.5	33.0	-13.6
				75	0	75	0	15.4	17.6	33.0	-15.4
			64QAM	1	74	1	0	15.8	18.0	33.0	-15.0
				75	0	75	0	15.6	17.8	33.0	-15.2
	2527.5	2542.5	QPSK	1	74	1	0	18.5	20.7	33.0	-12.4
				75	0	75	0	16.4	18.6	33.0	-14.4
			16QAM	1	74	1	0	17.5	19.6	33.0	-13.4
				75	0	75	0	15.4	17.6	33.0	-15.4
			64QAM	1	74	1	0	15.7	17.9	33.0	-15.2
				75	0	75	0	15.6	17.8	33.0	-15.3
	2547.5	2562.5	QPSK	1	74	1	0	18.3	20.4	33.0	-12.6
				75	0	75	0	16.4	18.5	33.0	-14.5
			16QAM	1	74	1	0	17.3	19.5	33.0	-13.5
				75	0	75	0	15.3	17.5	33.0	-15.5
			64QAM	1	74	1	0	15.9	18.1	33.0	-15.0
				75	0	75	0	15.8	18.0	33.0	-15.0

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		2.17									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2507.8	2524.9	QPSK	1	74	1	0	18.4	20.5	33.0	-12.5
				75	0	100	0	16.3	18.5	33.0	-14.6
			16QAM	1	74	1	0	17.3	19.5	33.0	-13.6
				75	0	100	0	15.3	17.5	33.0	-15.5
	2525.3	2542.4	64QAM	1	74	1	0	15.7	17.9	33.0	-15.1
				75	0	100	0	15.5	17.7	33.0	-15.3
			QPSK	1	74	1	0	18.5	20.7	33.0	-12.4
				75	0	100	0	16.2	18.4	33.0	-14.6
			16QAM	1	74	1	0	17.4	19.6	33.0	-13.4
				75	0	100	0	15.3	17.5	33.0	-15.5
			64QAM	1	74	1	0	15.7	17.9	33.0	-15.1
				75	0	100	0	15.8	17.9	33.0	-15.1
	2542.9	2560.0	QPSK	1	74	1	0	18.2	20.4	33.0	-12.6
				75	0	100	0	16.4	18.6	33.0	-14.5
			16QAM	1	74	1	0	17.3	19.5	33.0	-13.5
				75	0	100	0	15.4	17.6	33.0	-15.4
			64QAM	1	74	1	0	15.8	18.0	33.0	-15.0
				75	0	100	0	15.8	18.0	33.0	-15.1

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		2.17									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2510.0	2527.1	QPSK	1	99	1	0	18.3	20.5	33.0	-12.5
				100	0	75	0	16.3	18.5	33.0	-14.6
			16QAM	1	99	1	0	17.3	19.4	33.0	-13.6
				100	0	75	0	15.4	17.6	33.0	-15.4
	2527.6	2544.7	64QAM	1	99	1	0	15.7	17.8	33.0	-15.2
				100	0	75	0	15.5	17.7	33.0	-15.3
			QPSK	1	99	1	0	18.4	20.6	33.0	-12.4
				100	0	75	0	16.3	18.5	33.0	-14.5
			16QAM	1	99	1	0	17.5	19.6	33.0	-13.4
				100	0	75	0	15.4	17.5	33.0	-15.5
			64QAM	1	99	1	0	15.8	18.0	33.0	-15.0
				100	0	75	0	16.1	18.2	33.0	-14.8
	2545.1	2562.2	QPSK	1	99	1	0	18.2	20.4	33.0	-12.6
				100	0	75	0	16.3	18.5	33.0	-14.5
			16QAM	1	99	1	0	17.3	19.5	33.0	-13.5
				100	0	75	0	15.4	17.6	33.0	-15.5
			64QAM	1	99	1	0	15.5	17.7	33.0	-15.3
				100	0	75	0	16.0	18.1	33.0	-14.9

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)		2.17									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2510.0	2529.8	QPSK	1	99	1	0	18.3	20.5	33.0	-12.5
				1	0	1	99	10.0	12.1	33.0	-20.9
				100	0	100	0	16.4	18.6	33.0	-14.4
			16QAM	1	99	1	0	17.3	19.5	33.0	-13.5
				1	0	1	99	9.8	12.0	33.0	-21.0
				100	0	100	0	15.4	17.6	33.0	-15.4
			64QAM	1	99	1	0	15.6	17.8	33.0	-15.3
				1	0	1	99	9.9	12.0	33.0	-21.0
				100	0	100	0	15.5	17.7	33.0	-15.3
	2525.1	2544.9	QPSK	1	99	1	0	18.4	20.5	33.0	-12.5
				1	0	1	99	10.0	12.1	33.0	-20.9
				100	0	100	0	16.4	18.6	33.0	-14.4
			16QAM	1	99	1	0	17.3	19.5	33.0	-13.5
				1	0	1	99	9.7	11.9	33.0	-21.1
				100	0	100	0	15.5	17.7	33.0	-15.4
			64QAM	1	99	1	0	15.8	18.0	33.0	-15.0
				1	0	1	99	9.7	11.9	33.0	-21.1
				100	0	100	0	16.0	18.2	33.0	-14.8
	2540.2	2560.0	QPSK	1	99	1	0	18.5	20.7	33.0	-12.4
				1	0	1	99	10.0	12.2	33.0	-20.9
				100	0	100	0	16.4	18.6	33.0	-14.5
			16QAM	1	99	1	0	17.4	19.6	33.0	-13.5
				1	0	1	99	9.8	12.0	33.0	-21.0
				100	0	100	0	15.4	17.6	33.0	-15.4
			64QAM	1	99	1	0	15.9	18.1	33.0	-14.9
				1	0	1	99	9.9	12.1	33.0	-20.9
				100	0	100	0	15.9	18.1	33.0	-14.9

7.2.3. LTE BAND 41

ID:	50874	Date:	6/11/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (5.0MHz + 20.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
5MHz / 20MHz	2499.3	2511.0	QPSK	1	24	1	0	19.1	21.3	33.0	-11.7
				25	0	100	0	17.1	19.3	33.0	-13.7
			16QAM	1	24	1	0	18.1	20.3	33.0	-12.7
				25	0	100	0	16.2	18.4	33.0	-14.6
			64QAM	1	24	1	0	16.5	18.7	33.0	-14.3
				25	0	100	0	16.1	18.3	33.0	-14.7
	2583.8	2595.5	QPSK	1	24	1	0	19.3	21.5	33.0	-11.5
				25	0	100	0	17.2	19.4	33.0	-13.6
			16QAM	1	24	1	0	18.1	20.3	33.0	-12.7
				25	0	100	0	16.2	18.4	33.0	-14.6
			64QAM	1	24	1	0	16.5	18.7	33.0	-14.3
				25	0	100	0	16.3	18.5	33.0	-14.5
	2668.3	2680.0	QPSK	1	24	1	0	19.3	21.5	33.0	-11.5
				25	0	100	0	17.1	19.3	33.0	-13.7
			16QAM	1	24	1	0	18.6	20.8	33.0	-12.2
				25	0	100	0	16.1	18.3	33.0	-14.7
			64QAM	1	24	1	0	16.1	18.3	33.0	-14.7
				25	0	100	0	16.4	18.6	33.0	-14.4

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 5.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 5MHz	2506.0	2517.7	QPSK	1	99	1	0	19.2	21.4	33.0	-11.6
				1	0	1	24	10.8	13.1	33.0	-20.0
				100	0	25	0	17.1	19.3	33.0	-13.7
			16QAM	1	99	1	0	18.2	20.5	33.0	-12.6
				1	0	1	24	10.8	13.0	33.0	-20.0
				100	0	25	0	16.1	18.4	33.0	-14.7
			64QAM	1	99	1	0	16.4	18.6	33.0	-14.4
				1	0	1	24	10.7	12.9	33.0	-20.1
				100	0	25	0	16.3	18.5	33.0	-14.5
	2590.5	2602.2	QPSK	1	99	1	0	19.1	21.3	33.0	-11.7
				1	0	1	24	10.8	13.1	33.0	-20.0
				100	0	25	0	17.1	19.3	33.0	-13.7
			16QAM	1	99	1	0	18.2	20.5	33.0	-12.6
				1	0	1	24	10.9	13.1	33.0	-19.9
				100	0	25	0	16.1	18.4	33.0	-14.7
			64QAM	1	99	1	0	16.5	18.7	33.0	-14.3
				1	0	1	24	11.0	13.2	33.0	-19.8
				100	0	25	0	16.3	18.6	33.0	-14.5
	2675.0	2686.7	QPSK	1	99	1	0	19.0	21.3	33.0	-11.8
				1	0	1	24	11.0	13.2	33.0	-19.8
				100	0	25	0	17.1	19.3	33.0	-13.7
			16QAM	1	99	1	0	18.2	20.4	33.0	-12.6
				1	0	1	24	10.8	13.0	33.0	-20.0
				100	0	25	0	16.1	18.4	33.0	-14.7
			64QAM	1	99	1	0	16.1	18.3	33.0	-14.7
				1	0	1	24	10.9	13.1	33.0	-19.9
				100	0	25	0	16.1	18.3	33.0	-14.7

OUTPUT POWER FOR LTE BAND 41 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
10MHz / 20MHz	2501.5	2515.9	QPSK	1	49	1	0	19.0	21.2	33.0	-11.8
				50	0	100	0	17.1	19.3	33.0	-13.7
			16QAM	1	49	1	0	18.1	20.3	33.0	-12.7
				50	0	100	0	16.1	18.3	33.0	-14.7
			64QAM	1	49	1	0	16.2	18.4	33.0	-14.6
				50	0	100	0	16.2	18.4	33.0	-14.6
	2583.6	2598.0	QPSK	1	49	1	0	19.3	21.5	33.0	-11.5
				50	0	100	0	17.1	19.4	33.0	-13.7
			16QAM	1	49	1	0	18.1	20.3	33.0	-12.7
				50	0	100	0	16.2	18.4	33.0	-14.6
			64QAM	1	49	1	0	16.2	18.4	33.0	-14.6
				50	0	100	0	16.3	18.5	33.0	-14.5
	2665.6	2680.0	QPSK	1	49	1	0	19.2	21.5	33.0	-11.6
				50	0	100	0	17.3	19.5	33.0	-13.5
			16QAM	1	49	1	0	18.6	20.8	33.0	-12.2
				50	0	100	0	16.6	18.8	33.0	-14.2
			64QAM	1	49	1	0	16.2	18.4	33.0	-14.6
				50	0	100	0	16.5	18.7	33.0	-14.3

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2506.0	2520.4	QPSK	1	99	1	0	19.0	21.2	33.0	-11.8
				100	0	50	0	17.1	19.3	33.0	-13.7
			16QAM	1	99	1	0	18.2	20.4	33.0	-12.6
				100	0	50	0	16.1	18.4	33.0	-14.7
			64QAM	1	99	1	0	16.2	18.5	33.0	-14.6
				100	0	50	0	16.3	18.5	33.0	-14.5
	2588.1	2602.5	QPSK	1	99	1	0	19.3	21.5	33.0	-11.5
				100	0	50	0	17.1	19.3	33.0	-13.7
			16QAM	1	99	1	0	18.1	20.3	33.0	-12.7
				100	0	50	0	16.2	18.4	33.0	-14.6
			64QAM	1	99	1	0	16.3	18.5	33.0	-14.5
				100	0	50	0	16.4	18.6	33.0	-14.4
	2670.1	2684.5	QPSK	1	99	1	0	18.9	21.2	33.0	-11.9
				100	0	50	0	17.2	19.4	33.0	-13.6
			16QAM	1	99	1	0	18.2	20.5	33.0	-12.6
				100	0	50	0	16.2	18.4	33.0	-14.6
			64QAM	1	99	1	0	16.3	18.5	33.0	-14.5
				100	0	50	0	16.4	18.6	33.0	-14.4

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2503.5	2518.5	QPSK	1	74	1	0	19.1	21.3	33.0	-11.7
				75	0	75	0	17.1	19.3	33.0	-13.7
			16QAM	1	74	1	0	18.4	20.6	33.0	-12.4
				75	0	75	0	16.1	18.3	33.0	-14.7
			64QAM	1	74	1	0	16.2	18.4	33.0	-14.6
				75	0	75	0	16.3	18.6	33.0	-14.5
	2585.5	2600.5	QPSK	1	74	1	0	19.3	21.6	33.0	-11.5
				75	0	75	0	17.1	19.3	33.0	-13.7
			16QAM	1	74	1	0	17.9	20.1	33.0	-12.9
				75	0	75	0	16.1	18.3	33.0	-14.7
			64QAM	1	74	1	0	16.2	18.4	33.0	-14.6
				75	0	75	0	16.3	18.5	33.0	-14.5
	2667.5	2682.5	QPSK	1	74	1	0	19.2	21.4	33.0	-11.6
				75	0	75	0	16.3	18.5	33.0	-14.5
			16QAM	1	74	1	0	18.0	20.2	33.0	-12.8
				75	0	75	0	15.7	17.9	33.0	-15.1
			64QAM	1	74	1	0	16.2	18.4	33.0	-14.6
				75	0	75	0	15.9	18.1	33.0	-14.9

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2503.8	2520.9	QPSK	1	74	1	0	19.2	21.4	33.0	-11.6
				75	0	100	0	17.1	19.3	33.0	-13.7
			16QAM	1	74	1	0	18.3	20.6	33.0	-12.5
				75	0	100	0	16.1	18.3	33.0	-14.7
			64QAM	1	74	1	0	16.1	18.3	33.0	-14.7
				75	0	100	0	16.2	18.4	33.0	-14.6
	2583.3	2600.4	QPSK	1	74	1	0	19.3	21.5	33.0	-11.5
				75	0	100	0	17.1	19.3	33.0	-13.7
			16QAM	1	74	1	0	18.0	20.2	33.0	-12.8
				75	0	100	0	16.1	18.3	33.0	-14.7
			64QAM	1	74	1	0	16.4	18.7	33.0	-14.4
				75	0	100	0	16.3	18.5	33.0	-14.5
	2662.9	2680.0	QPSK	1	74	1	0	19.2	21.4	33.0	-11.6
				75	0	100	0	16.2	18.4	33.0	-14.6
			16QAM	1	74	1	0	18.1	20.3	33.0	-12.7
				75	0	100	0	15.6	17.9	33.0	-15.2
			64QAM	1	74	1	0	16.0	18.2	33.0	-14.8
				75	0	100	0	15.9	18.1	33.0	-14.9

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2506.0	2523.1	QPSK	1	99	1	0	19.1	21.4	33.0	-11.7
				100	0	75	0	17.0	19.2	33.0	-13.8
			16QAM	1	99	1	0	18.0	20.2	33.0	-12.8
				100	0	75	0	16.0	18.3	33.0	-14.8
			64QAM	1	99	1	0	16.3	18.5	33.0	-14.5
				100	0	75	0	16.3	18.5	33.0	-14.5
	2585.6	2602.7	QPSK	1	99	1	0	19.3	21.5	33.0	-11.5
				100	0	75	0	17.0	19.2	33.0	-13.8
			16QAM	1	99	1	0	18.0	20.3	33.0	-12.8
				100	0	75	0	16.0	18.2	33.0	-14.8
			64QAM	1	99	1	0	16.4	18.6	33.0	-14.4
				100	0	75	0	16.4	18.6	33.0	-14.4
	2665.1	2682.2	QPSK	1	99	1	0	18.8	21.0	33.0	-12.0
				100	0	75	0	17.2	19.4	33.0	-13.6
			16QAM	1	99	1	0	18.5	20.7	33.0	-12.3
				100	0	75	0	16.5	18.7	33.0	-14.3
			64QAM	1	99	1	0	16.4	18.6	33.0	-14.4
				100	0	75	0	16.5	18.7	33.0	-14.3

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)		2.22									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2506.0	2525.8	QPSK	1	99	1	0	19.3	21.5	33.0	-11.5
				1	0	1	99	10.9	13.1	33.0	-19.9
				100	0	100	0	17.1	19.3	33.0	-13.7
			16QAM	1	99	1	0	18.3	20.5	33.0	-12.5
				1	0	1	99	10.8	13.0	33.0	-20.0
				100	0	100	0	16.1	18.3	33.0	-14.7
			64QAM	1	99	1	0	16.3	18.6	33.0	-14.5
				1	0	1	99	10.6	12.8	33.0	-20.2
				100	0	100	0	16.2	18.5	33.0	-14.6
	2583.1	2602.9	QPSK	1	99	1	0	19.3	21.5	33.0	-11.5
				1	0	1	99	10.8	13.0	33.0	-20.0
				100	0	100	0	17.1	19.3	33.0	-13.7
			16QAM	1	99	1	0	18.2	20.5	33.0	-12.6
				1	0	1	99	10.9	13.1	33.0	-19.9
				100	0	100	0	16.1	18.3	33.0	-14.7
			64QAM	1	99	1	0	16.4	18.6	33.0	-14.4
				1	0	1	99	10.9	13.1	33.0	-19.9
				100	0	100	0	16.4	18.6	33.0	-14.4
	2660.2	2680.0	QPSK	1	99	1	0	19.0	21.2	33.0	-11.8
				1	0	1	99	10.8	13.0	33.0	-20.0
				100	0	100	0	17.3	19.5	33.0	-13.5
			16QAM	1	99	1	0	18.0	20.3	33.0	-12.8
				1	0	1	99	10.8	13.0	33.0	-20.0
				100	0	100	0	16.6	18.8	33.0	-14.2
			64QAM	1	99	1	0	16.5	18.7	33.0	-14.3
				1	0	1	99	10.8	13.0	33.0	-20.0
				100	0	100	0	16.3	18.5	33.0	-14.5

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

LTE BAND 7


BAND	MODE	RB SIZE/ RB OFFSET	f ((MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 7	20MHz + 10MHz BAND QPSK	100/0 + 50/0	2535	28.070	31.74
	20MHz + 10MHz BAND 16QAM			28.068	30.19
	20MHz + 10MHz BAND 64QAM			28.058	30.18
	20MHz + 20MHz BAND QPSK	100/0 + 100/0	2535	37.734	40.20
	20MHz + 20MHz BAND 16QAM			37.753	40.37
	20MHz + 20MHz BAND 64QAM			37.751	40.14
	10MHz + 20MHz BAND QPSK	50/0 + 100/0	2535	28.167	30.36
	10MHz + 20MHz BAND 16QAM			28.076	31.68
	10MHz + 20MHz BAND 64QAM			28.087	30.13
	15MHz + 15MHz BAND QPSK	75/0 + 75/0		28.609	30.87
	15MHz + 15MHz BAND 16QAM			28.751	30.72
	15MHz + 15MHz BAND 64QAM			28.571	30.81
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		32.934	35.24
	15MHz + 20MHz BAND 16QAM			32.895	35.36
	15MHz + 20MHz BAND 64QAM			32.885	35.17
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.840	35.10
	20MHz + 15MHz BAND 16QAM			32.868	35.19
	20MHz + 15MHz BAND 64QAM			32.896	35.21

LTE BAND 41


BAND	MODE	RB SIZE/ RB OFFSET	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 41 (FCC)	20MHz + 5MHz BAND QPSK	100/0 + 25/0	2593	23.392	25.72
	20MHz + 5MHz BAND 16QAM			23.315	25.05
	20MHz + 5MHz BAND 64QAM			23.269	25.27
	20MHz + 20MHz BAND QPSK	100/0 + 100/0	2593	37.695	42.65
	20MHz + 20MHz BAND 16QAM			37.681	41.55
	20MHz + 20MHz BAND 64QAM			37.724	40.15
	5MHz + 20MHz BAND QPSK	25/0 + 100/0	2593	23.417	26.13
	5MHz + 20MHz BAND 16QAM			23.374	25.53
	5MHz + 20MHz BAND 64QAM			23.292	25.18
	10MHz + 20MHz BAND QPSK	50/0 + 100/0		28.121	32.08
	10MHz + 20MHz BAND 16QAM			28.061	30.10
	10MHz + 20MHz BAND 64QAM			28.071	30.49
	20MHz + 10MHz BAND QPSK	100/0 + 50/0		28.067	30.16
	20MHz + 10MHz BAND 16QAM			28.039	30.12
	20MHz + 10MHz BAND 64QAM			28.063	30.14
	15MHz + 15MHz BAND QPSK	75/0 + 75/0		28.751	30.74
	15MHz + 15MHz BAND 16QAM			28.627	31.78
	15MHz + 15MHz BAND 64QAM			28.651	32.68
	15MHz + 20MHz BAND QPSK	75/0 + 100/0	2593	32.847	38.81
	15MHz + 20MHz BAND 16QAM			32.923	38.69
	15MHz + 20MHz BAND 64QAM			32.896	35.42
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.893	36.09
	20MHz + 15MHz BAND 16QAM			32.916	35.05
	20MHz + 15MHz BAND 64QAM			32.984	37.87

8.1.1. LTE BAND 7


QPSK, (20.0MHz + 10.0MHz BAND WIDTH)

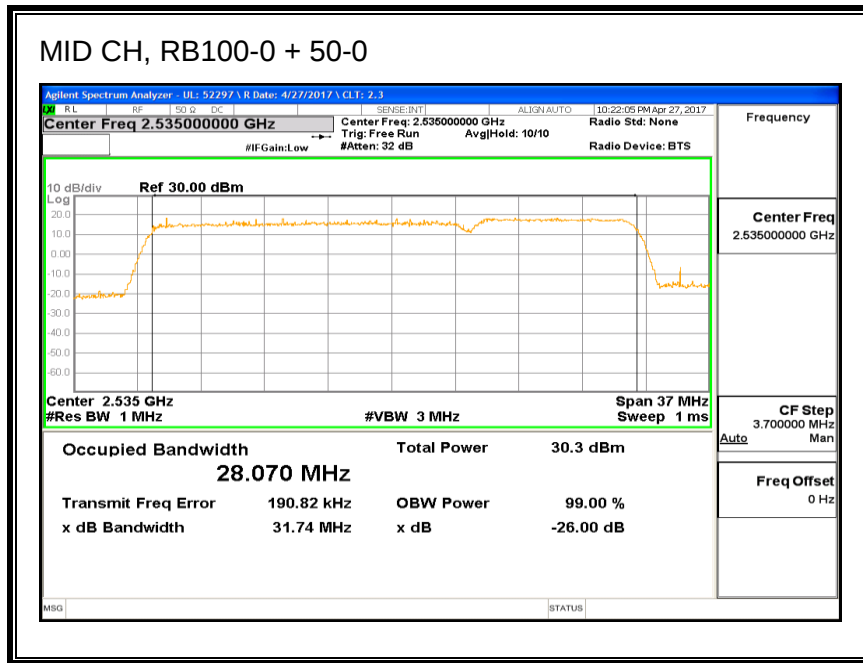


16QAM, (20.0MHz + 10.0MHz BAND WIDTH)

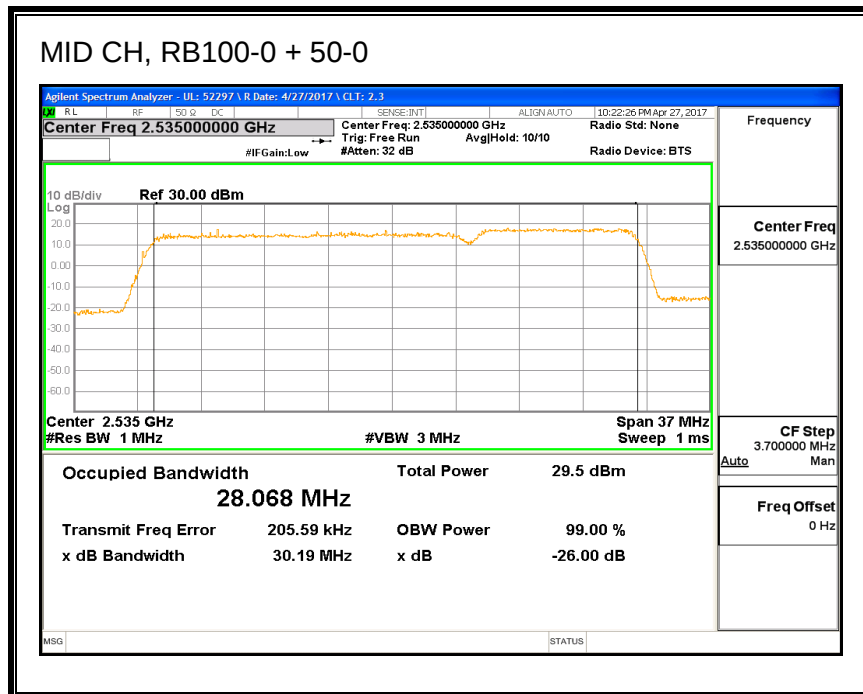


64QAM, (20.0MHz + 10.0MHz BAND WIDTH)

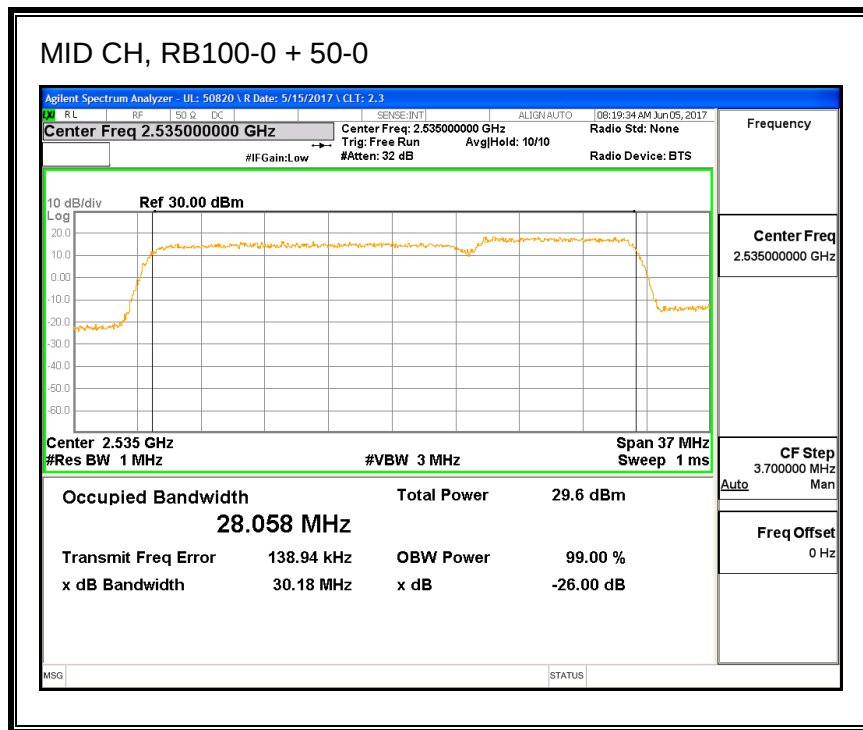


QPSK, (20.0MHz + 20.0MHz BAND WIDTH)

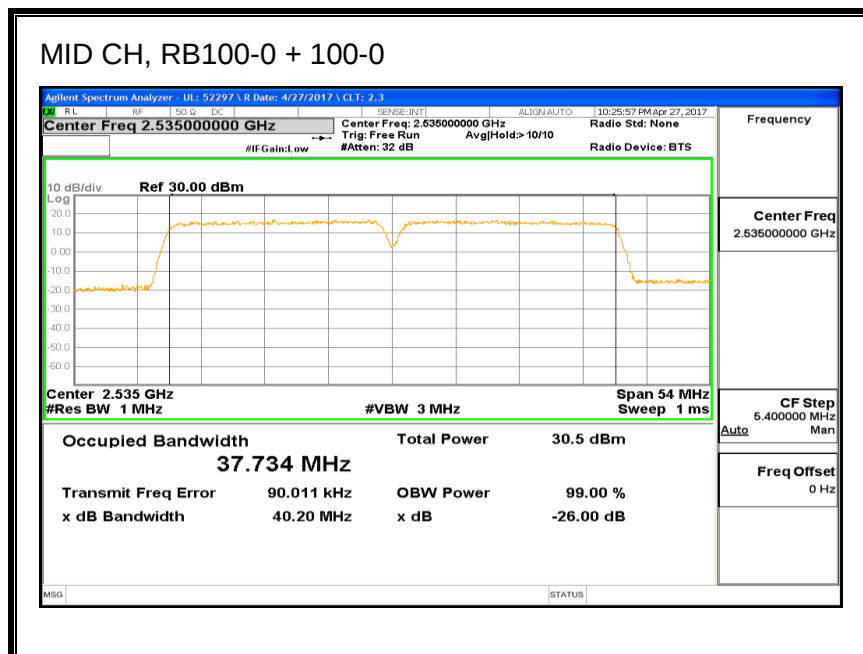


16QAM, (20.0MHz + 20.0MHz BAND WIDTH)

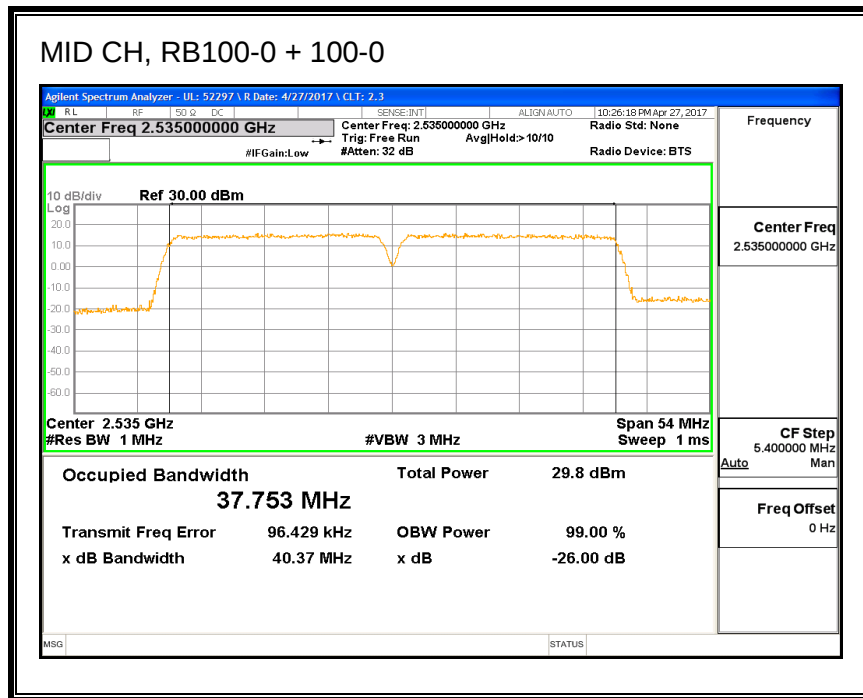


64QAM, (20.0MHz + 20.0MHz BAND WIDTH)

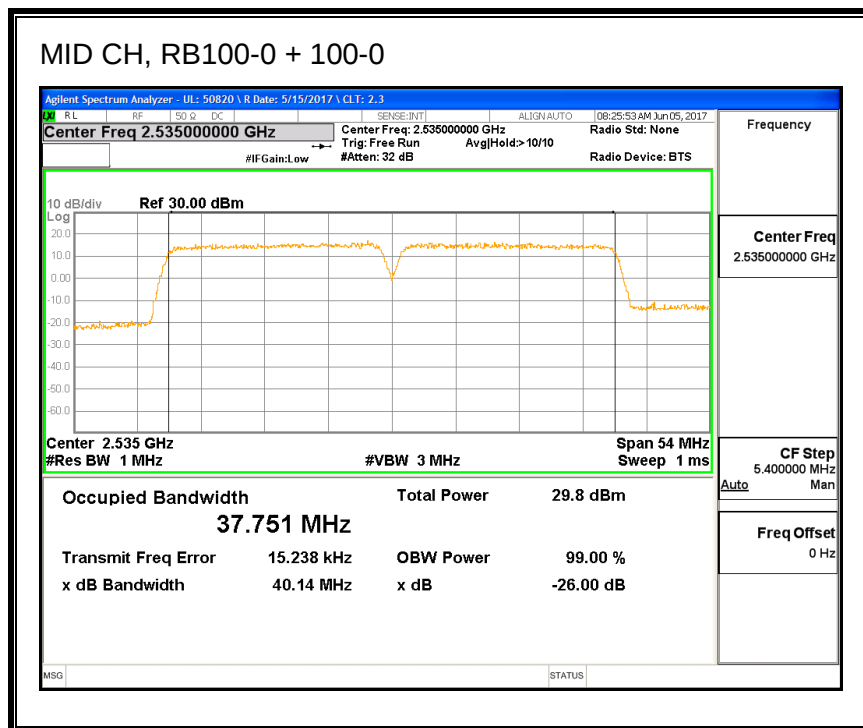

QPSK, (10.0MHz + 20.0MHz BAND WIDTH)

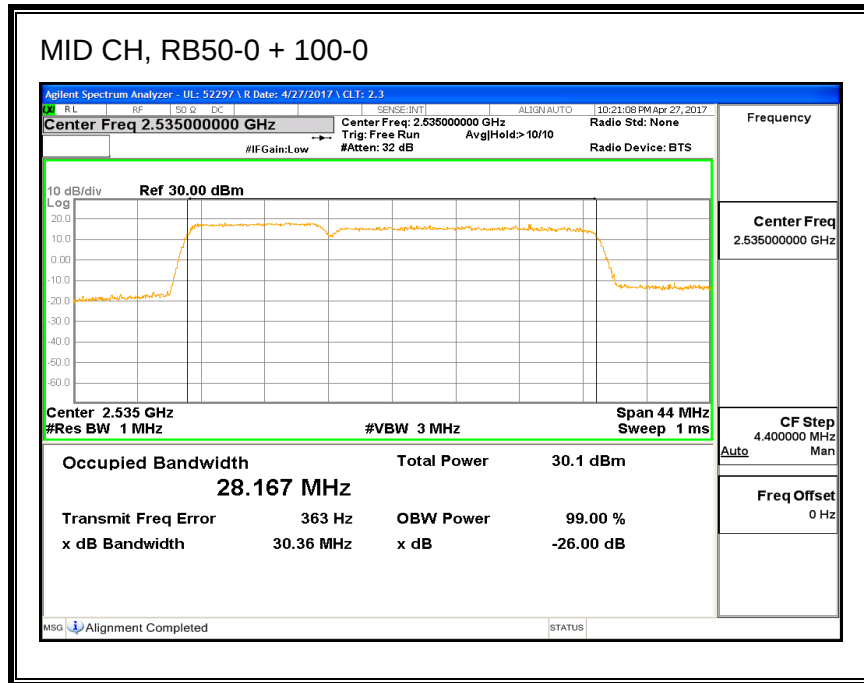

16QAM, (10.0MHz + 20.0MHz BAND WIDTH)

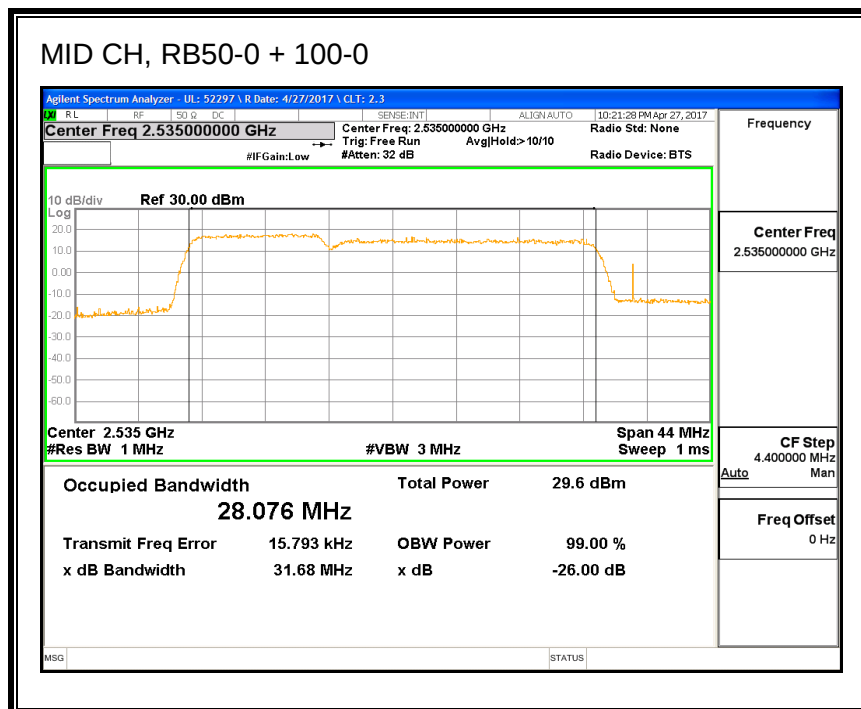

MID CH, RB50-0 + 100-0

Agilent Spectrum Analyzer - UI: 50820 \ R Date: 5/15/2017 \ CLT: 2.3

RL	RF	50 Q	DC	SENSE:INT	ALIGN:AUTO	08:17:42 AM Jun 05, 2017
----	----	------	----	-----------	------------	--------------------------

Center Freq 2.535000000 GHz **Center Freq: 2.535000000 GHz** **Radio Std: None** **Frequency**

Trig: Free Run **Avg/Hold: > 10/10**

#IF Gain: Low **#Atten: 32 dB** **Radio Device: BTS**

Ref 30.00 dBm

Center 2.535 GHz **Span 44 MHz**

#Res BW 1 MHz **#VBW 3 MHz** **Sweep 1 ms**

Occupied Bandwidth	Total Power	29.8 dBm
28.087 MHz		
Transmit Freq Error	-71.362 kHz	OBW Power
x dB Bandwidth	30.13 MHz	99.00 %
	x dB	-26.00 dB

CF Step 4.400000 MHz **Auto Man**

Freq Offset 0 Hz

MSG STATUS

MID CH, RB75-0 + 75-0

Agilent Spectrum Analyzer - UL: 52297 \ R Date: 4/27/2017 \ CLT: 2.3

Center Freq 2.535000000 GHz	Center Freq: 2.535000000 GHz Trig: Free Run #Atten: 32 dB	ALIGN AUTO 10:23:03 PM Apr 27, 2017 Radio Std: None Avg/Hold: 10/10 Radio Device: BTS
-----------------------------	---	---

10 dB/div Ref 30.00 dBm

Center 2.535 GHz Span 40.5 MHz
#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms

Frequency

Center Freq
2.535000000 GHz

CF Step
4.050000 MHz


Freq Offset
0 Hz

Occupied Bandwidth	Total Power	30.2 dBm
28.609 MHz		
Transmit Freq Error	28.169 kHz	OBW Power
x dB Bandwidth	30.87 MHz	99.00 %
	x dB	-26.00 dB


MSG

STATUS


16QAM, (15.0MHz + 15.0MHz BAND WIDTH)

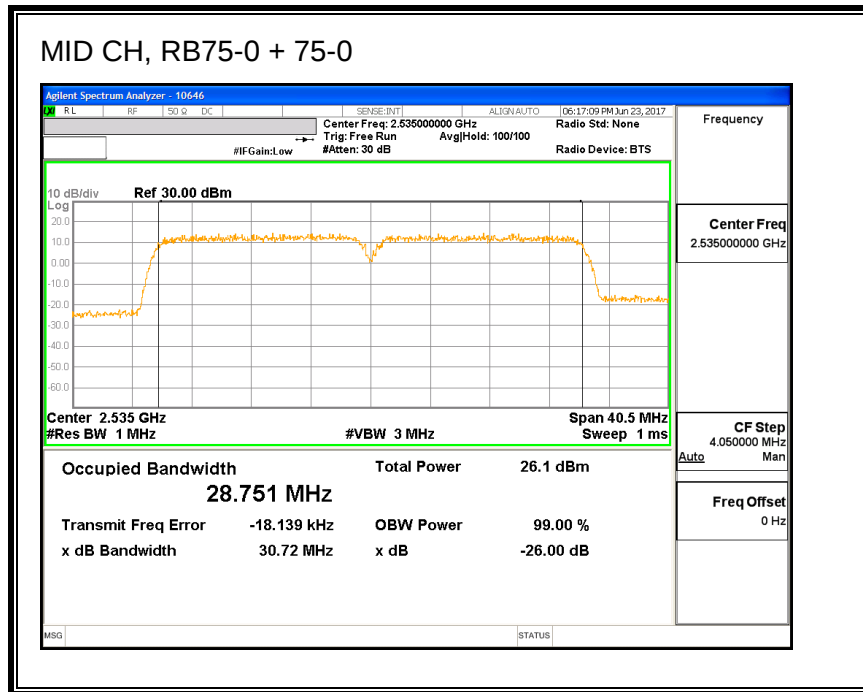


64QAM, (15.0MHz + 15.0MHz BAND WIDTH)

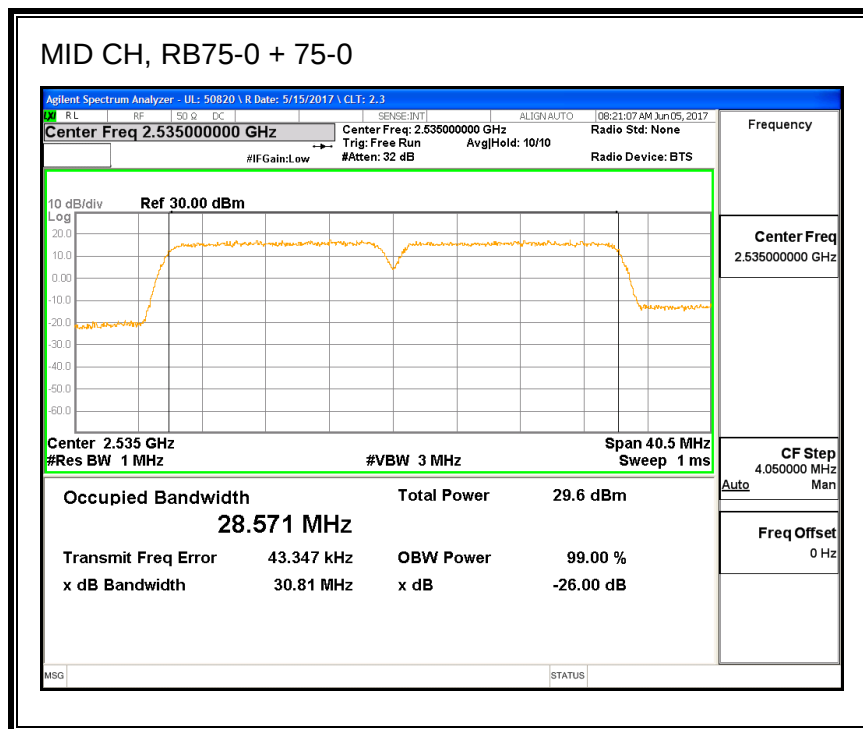


QPSK, (15.0MHz + 20.0MHz BAND WIDTH)

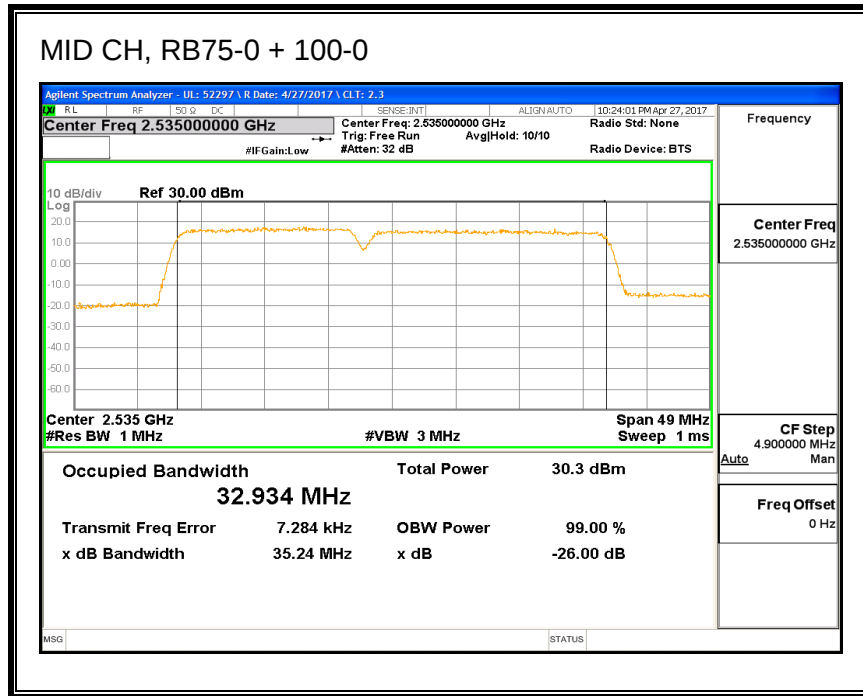


16QAM, (15.0MHz + 20.0MHz BAND WIDTH)

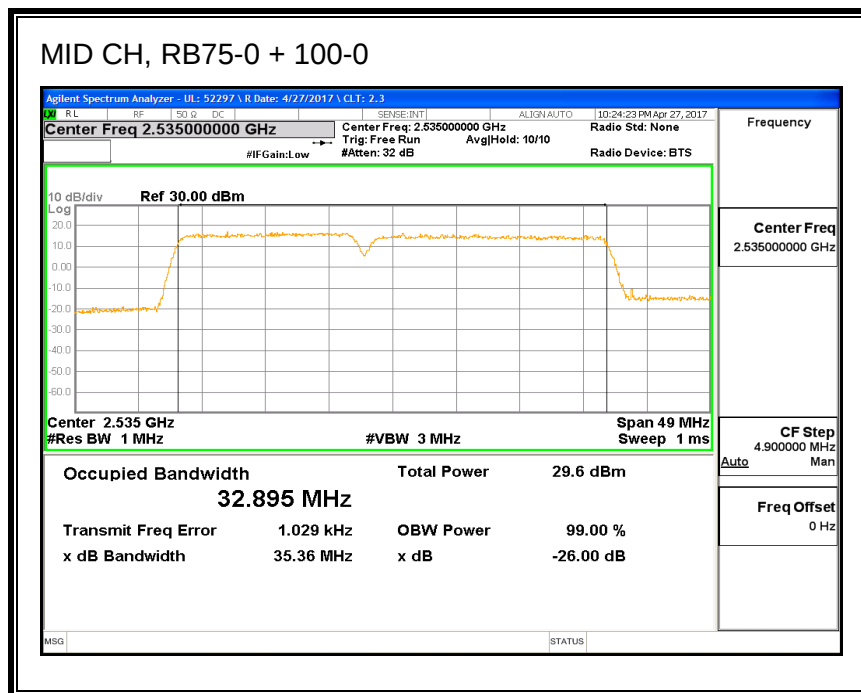


64QAM, (15.0MHz + 20.0MHz BAND WIDTH)

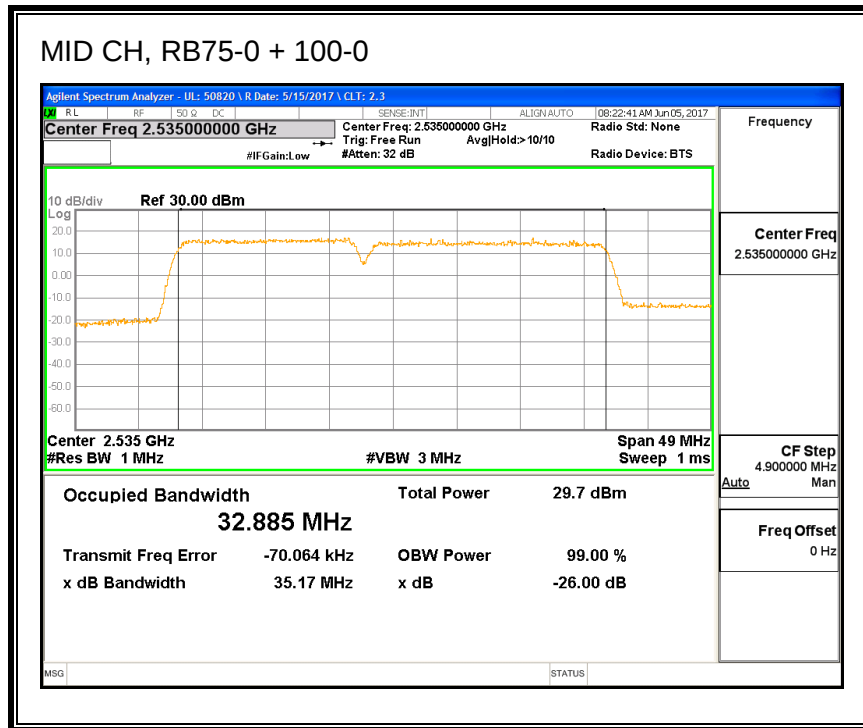


QPSK, (20.0MHz + 15.0MHz BAND WIDTH)

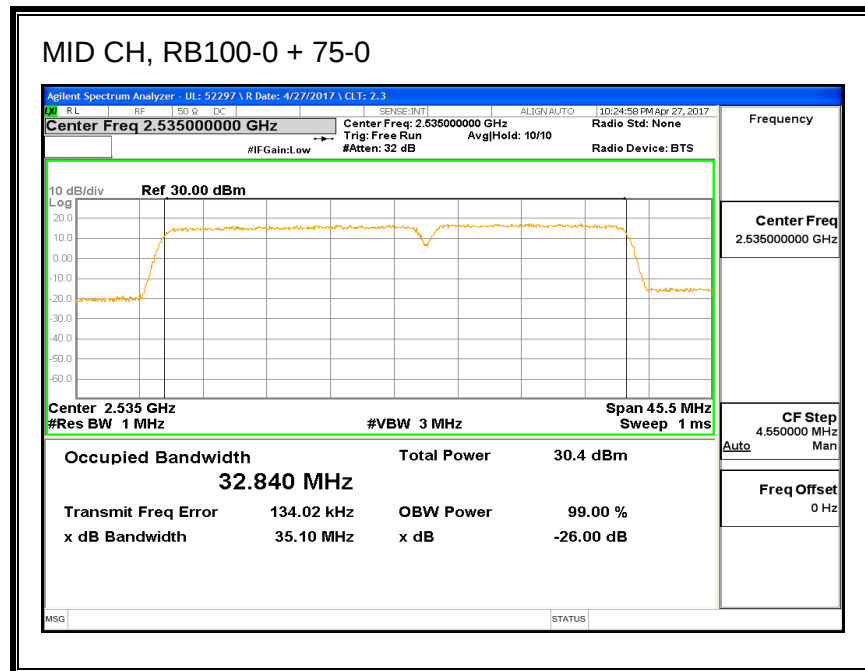

16QAM, (20.0MHz + 15.0MHz BAND WIDTH)

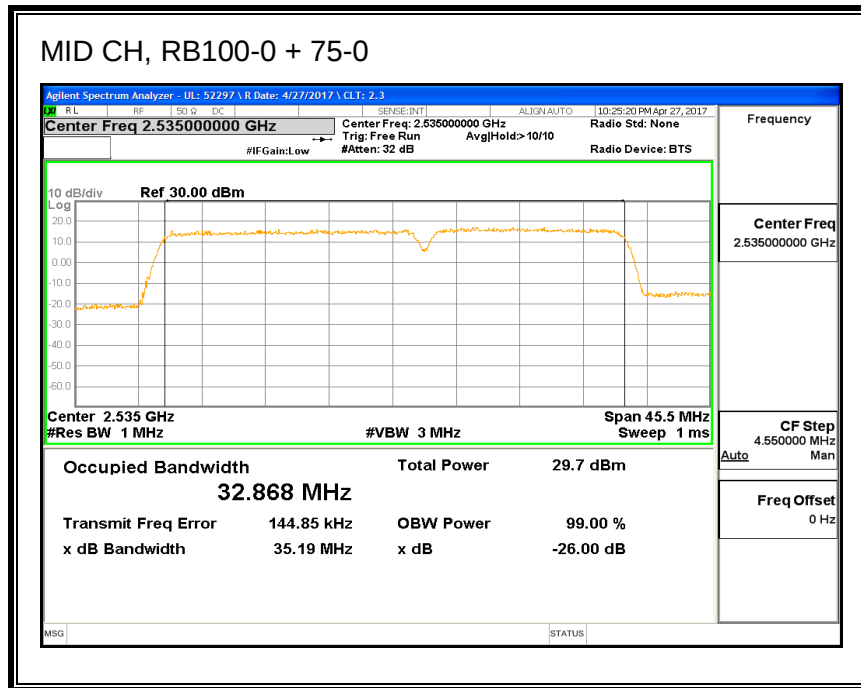


64QAM, (20.0MHz + 15.0MHz BAND WIDTH)

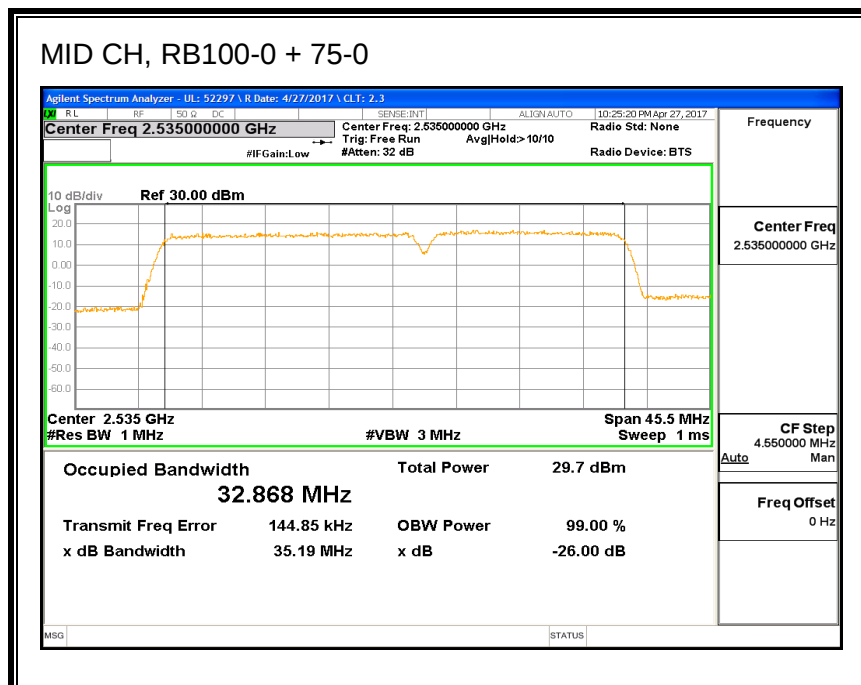


8.1.2. LTE BAND 41


QPSK, (20.0MHz + 5.0MHz BAND WIDTH)

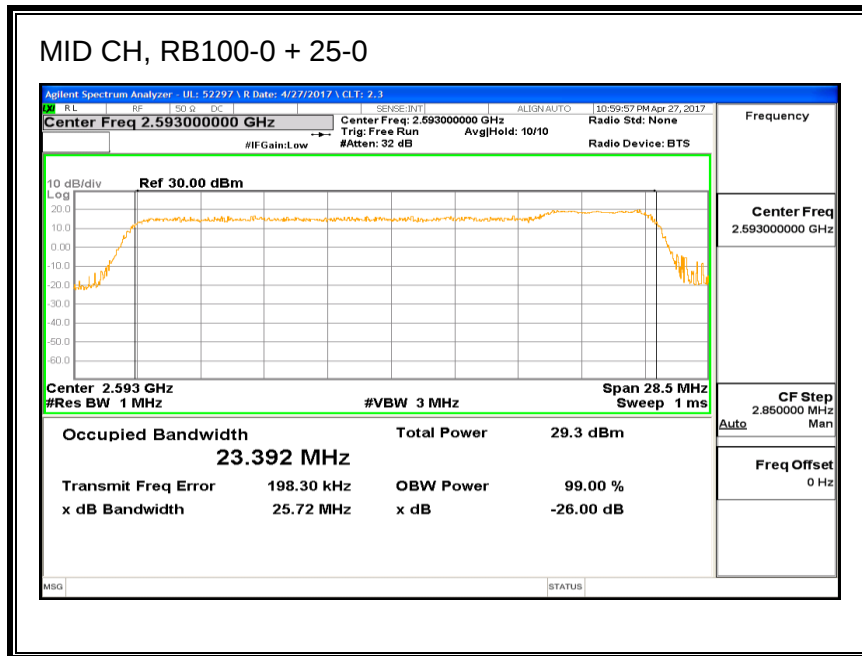


16QAM, (20.0MHz + 5.0MHz BAND WIDTH)

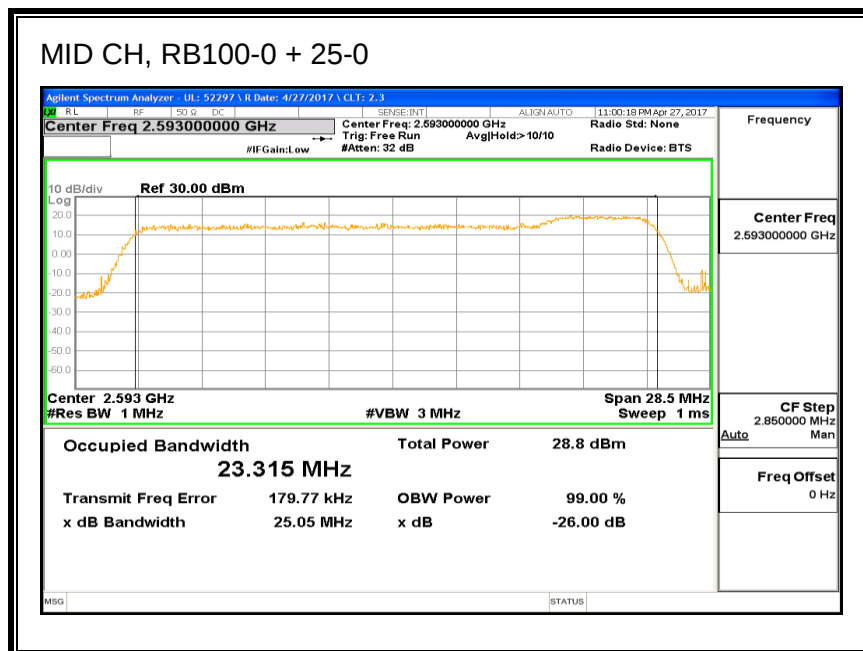


64QAM, (20.0MHz + 5.0MHz BAND WIDTH)

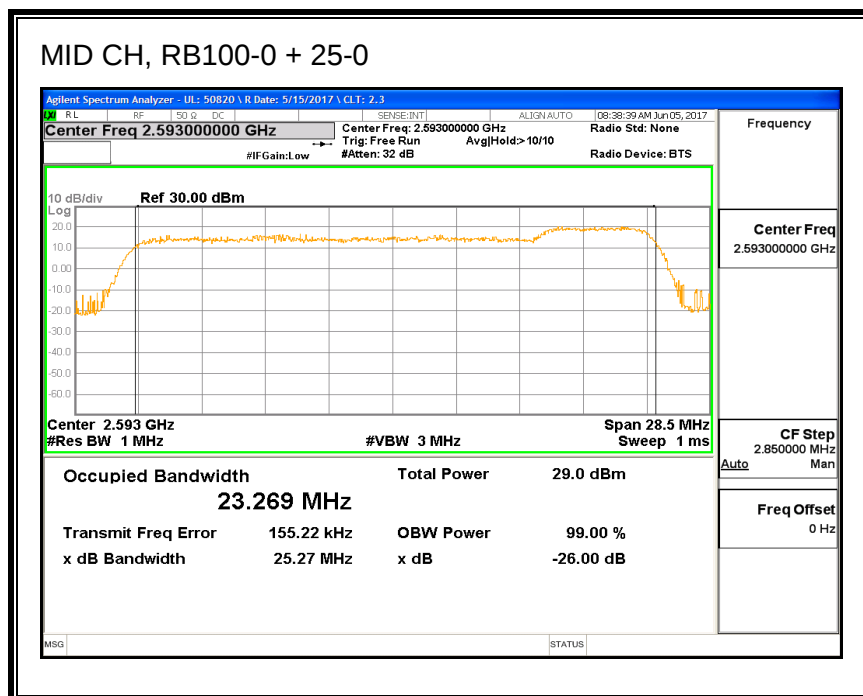


QPSK, (20.0MHz + 20.0MHz BAND WIDTH)

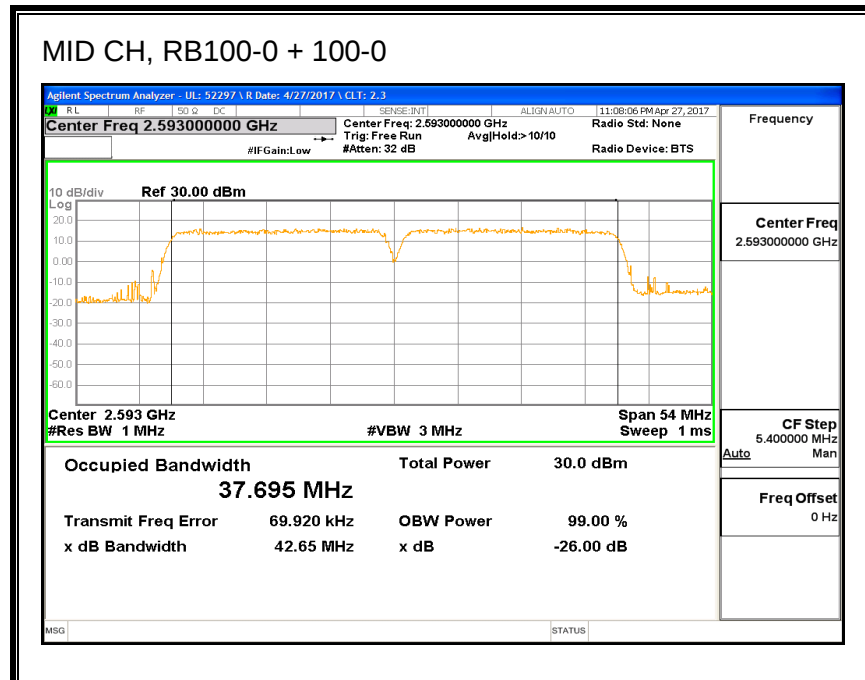


16QAM, (20.0MHz + 20.0MHz BAND WIDTH)

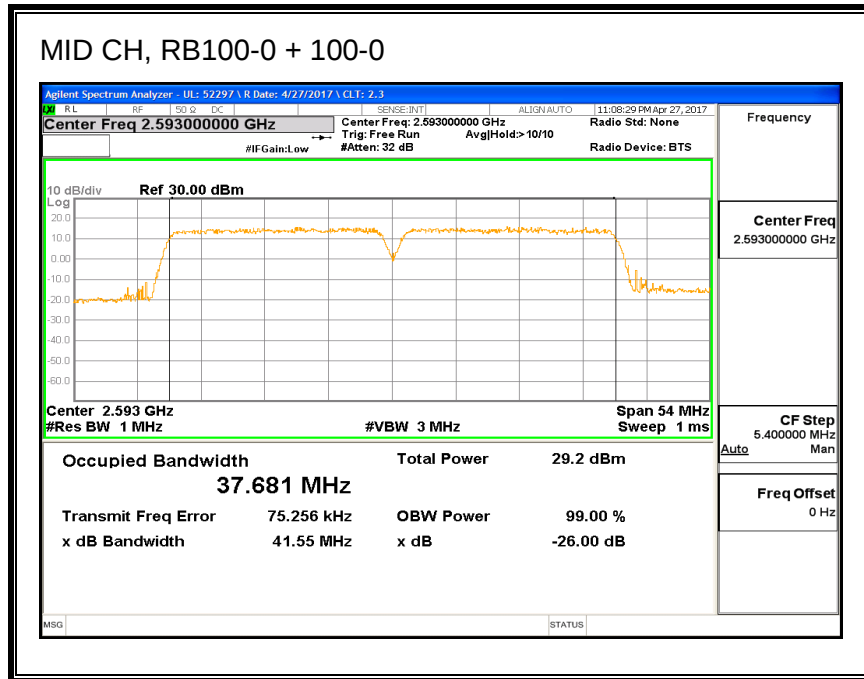


64QAM, (20.0MHz + 20.0MHz BAND WIDTH)

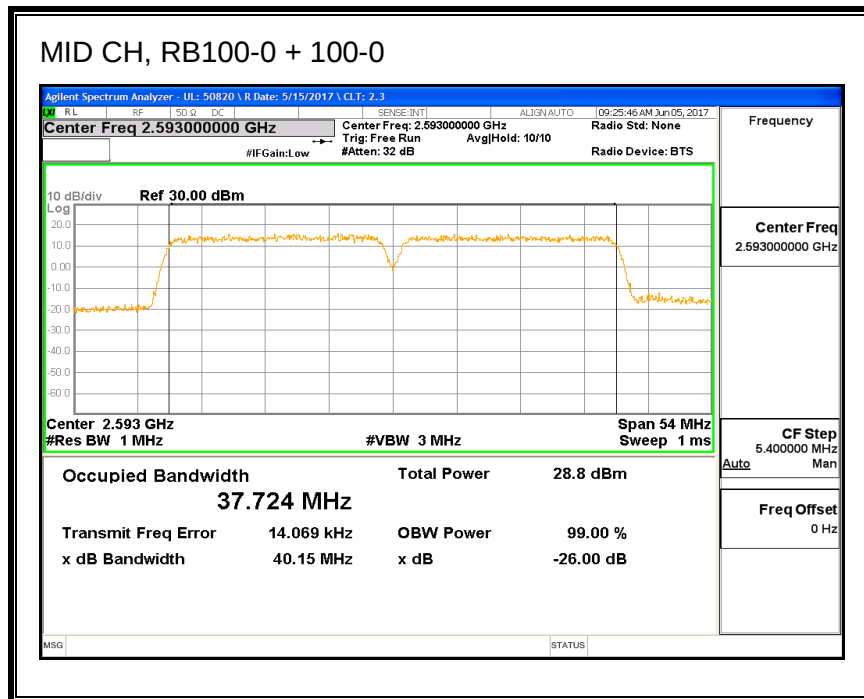


QPSK, (5.0MHz + 20.0MHz BAND WIDTH)

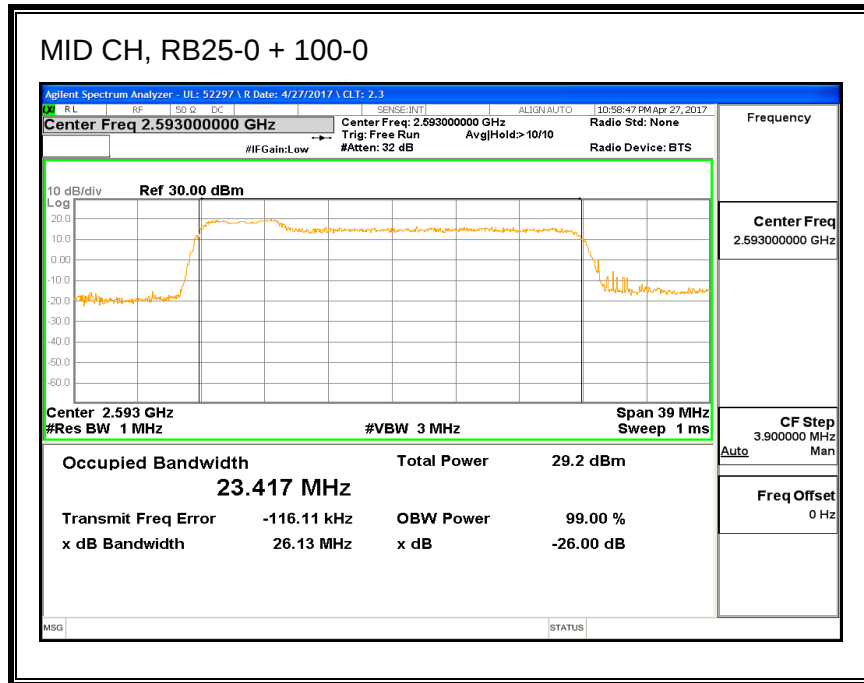


16QAM, (5.0MHz + 20.0MHz BAND WIDTH)

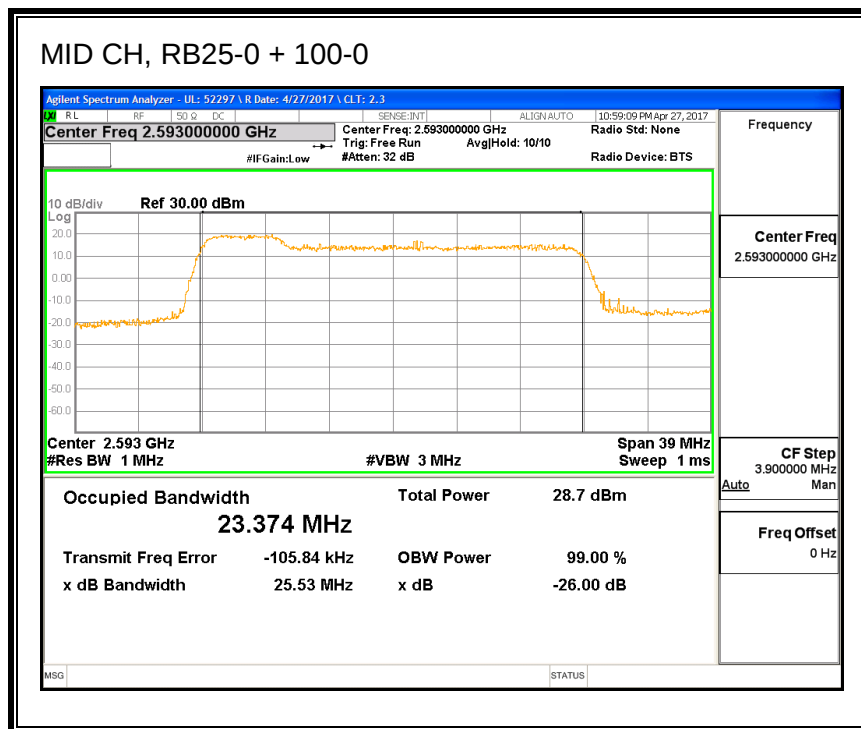


64QAM, (5.0MHz + 20.0MHz BAND WIDTH)

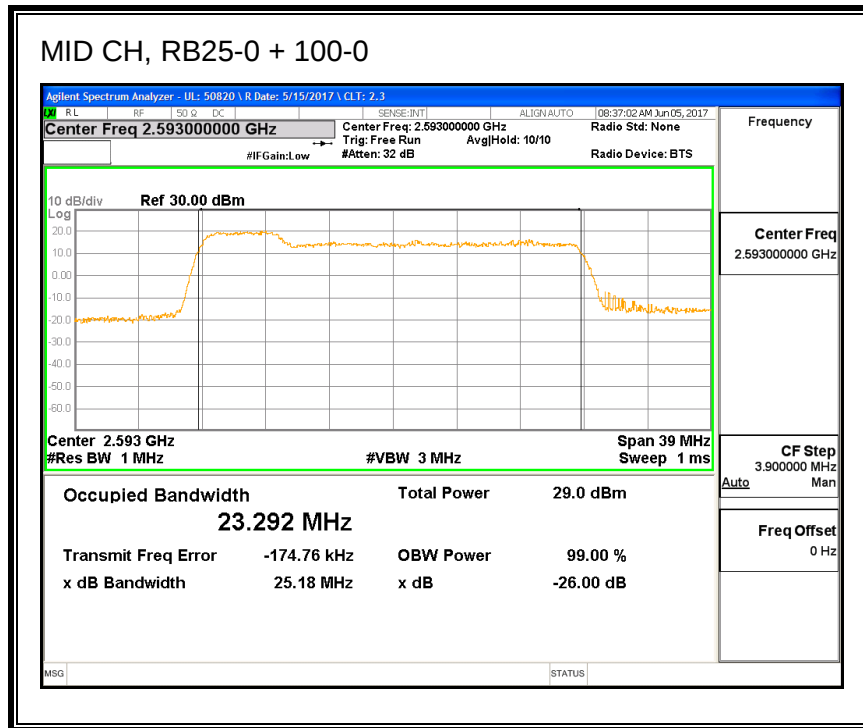


QPSK, (10.0MHz + 20.0MHz BAND WIDTH)

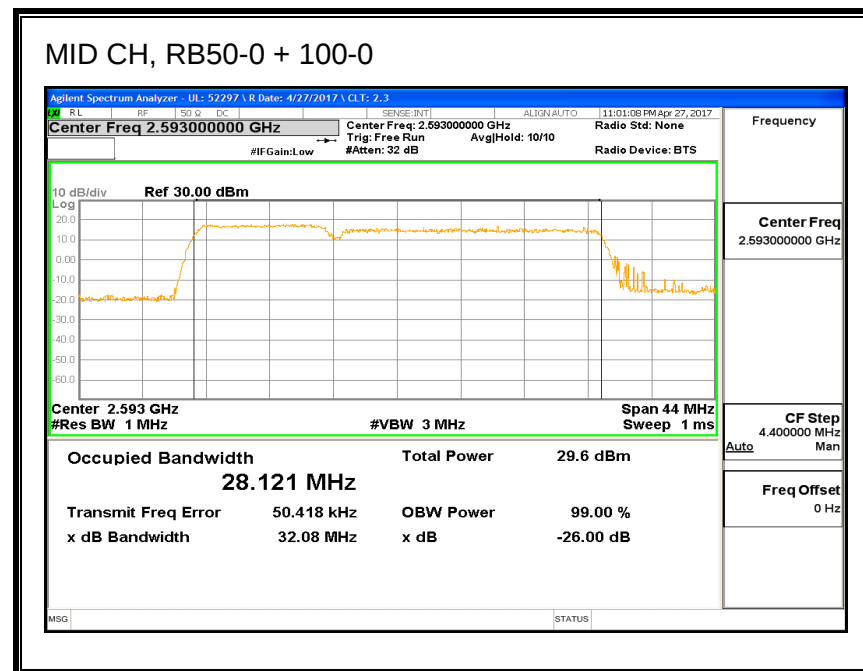


16QAM, (10.0MHz + 20.0MHz BAND WIDTH)

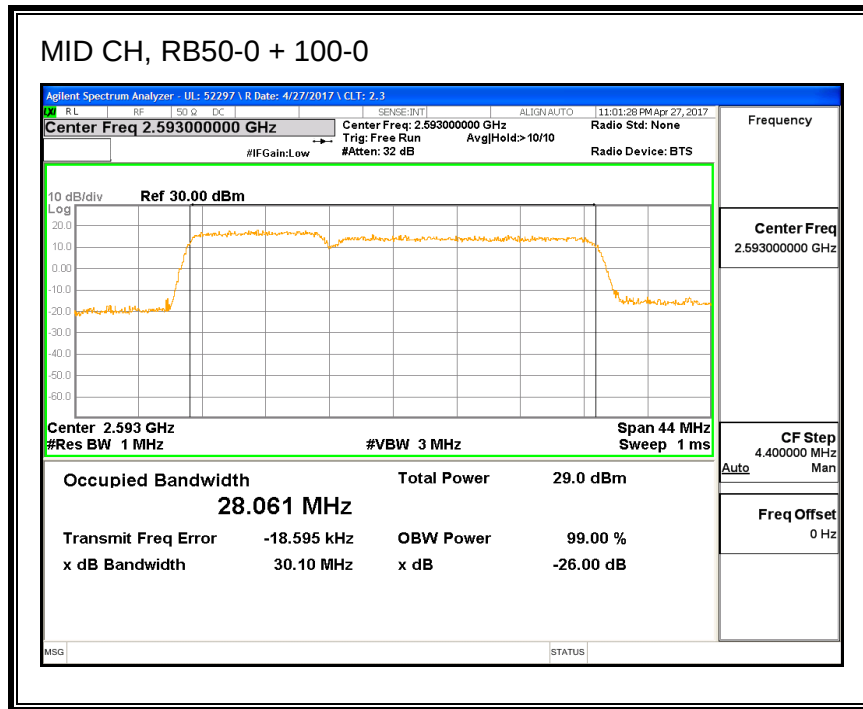


64QAM, (10.0MHz + 20.0MHz BAND WIDTH)

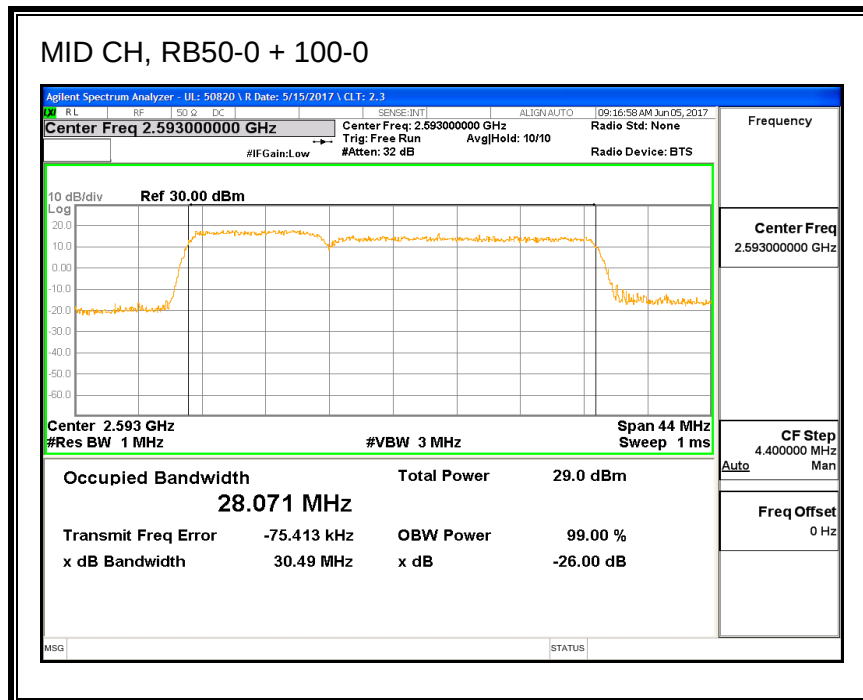


QPSK, (20.0MHz + 10.0MHz BAND WIDTH)

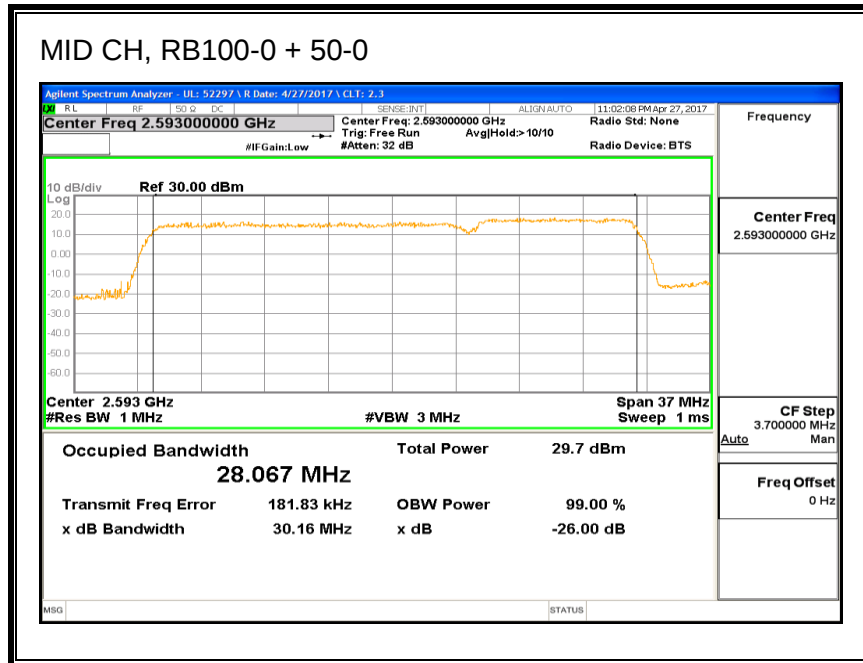


16QAM, (20.0MHz + 10.0MHz BAND WIDTH)

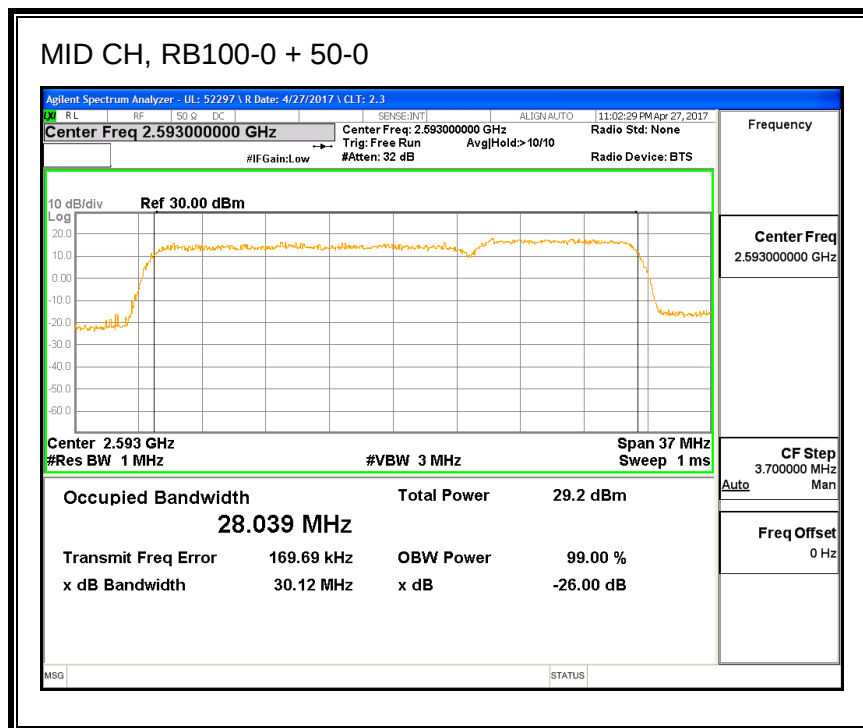


64QAM, (20.0MHz + 10.0MHz BAND WIDTH)

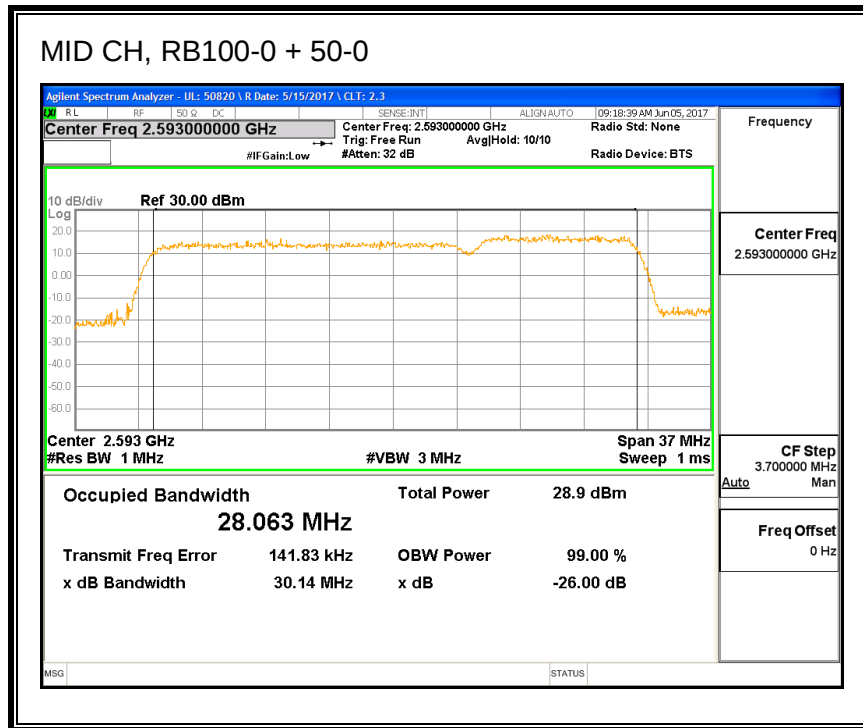


QPSK, (15.0MHz + 15.0MHz BAND WIDTH)

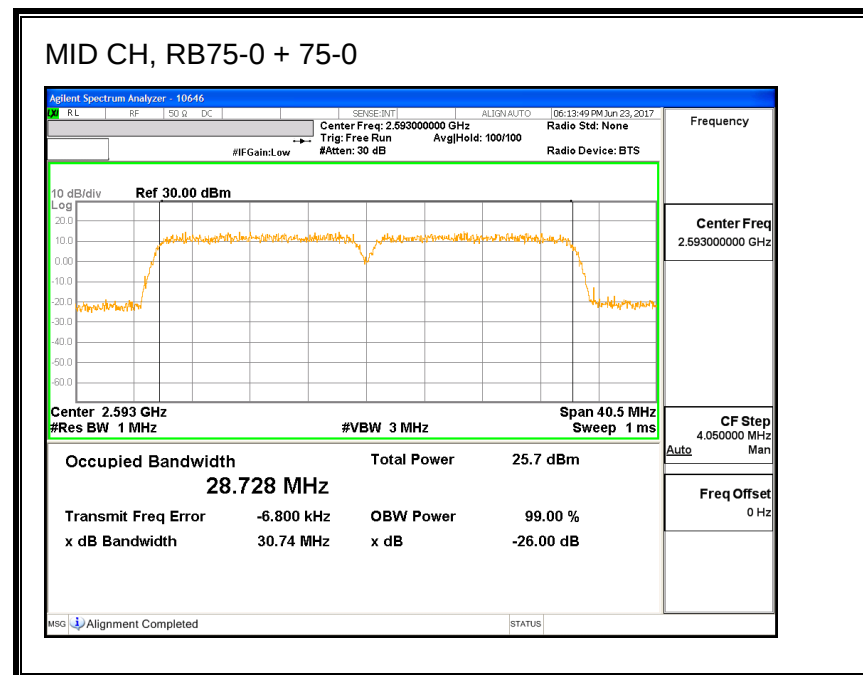


16QAM, (15.0MHz + 15.0MHz BAND WIDTH)

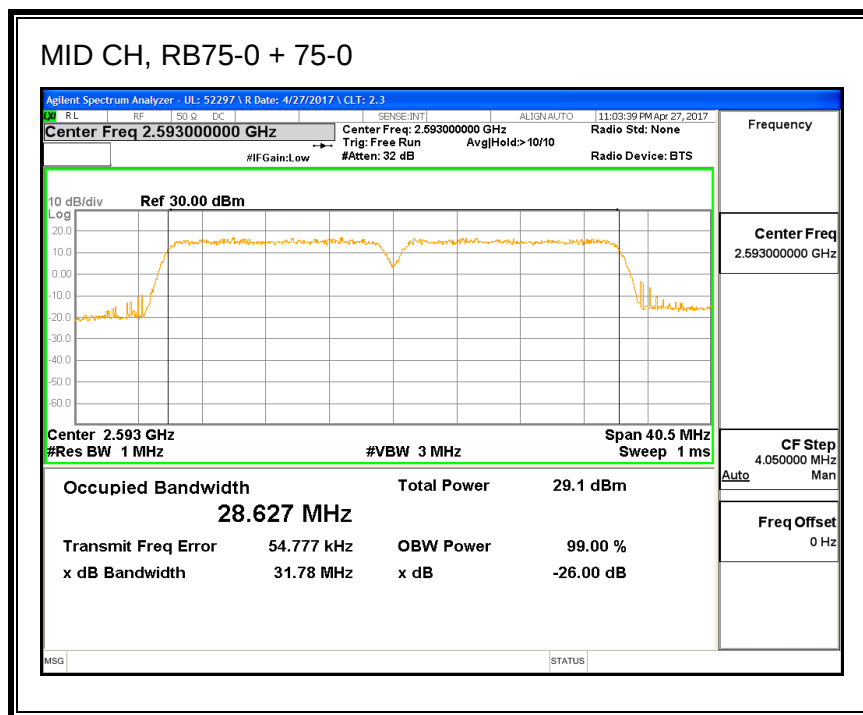


64QAM, (15.0MHz + 15.0MHz BAND WIDTH)

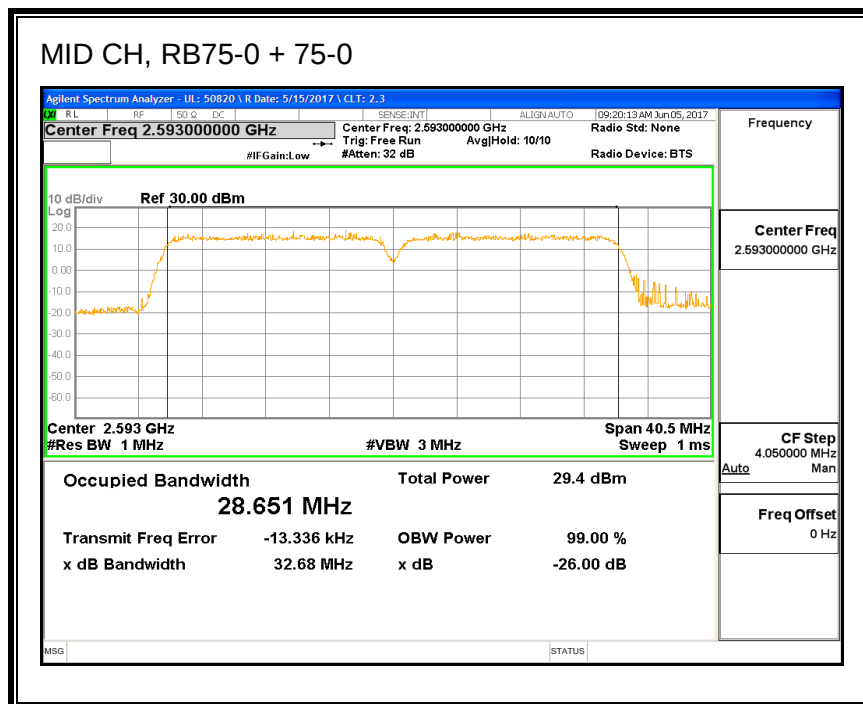


QPSK, (15.0MHz + 20.0MHz BAND WIDTH)

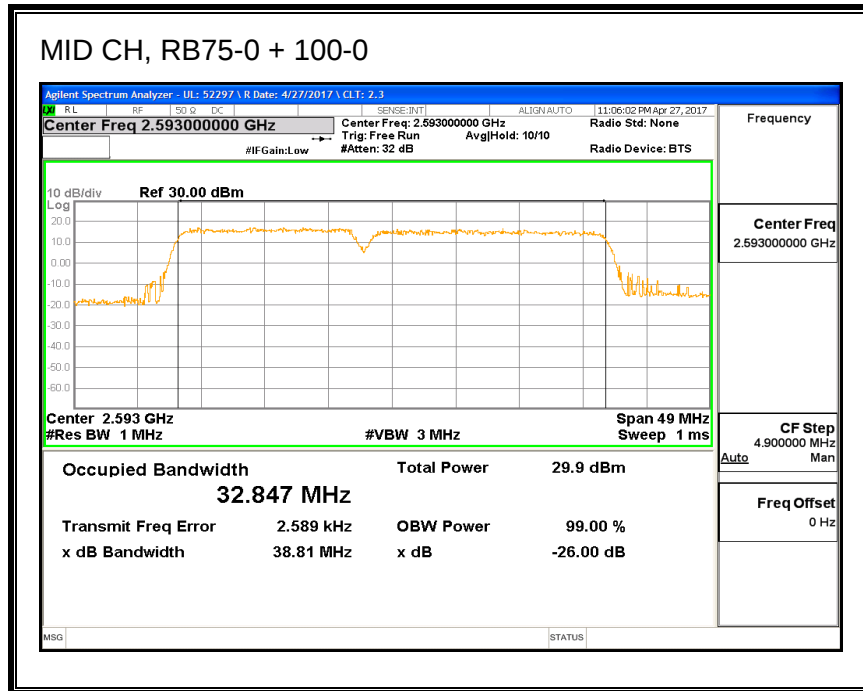


16QAM, (15.0MHz + 20.0MHz BAND WIDTH)

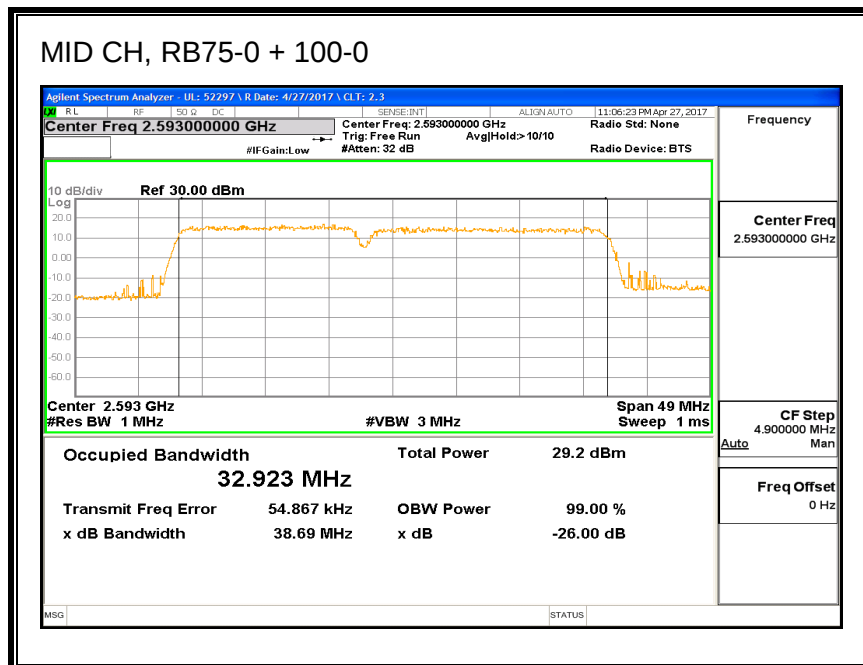


64QAM, (15.0MHz + 20.0MHz BAND WIDTH)

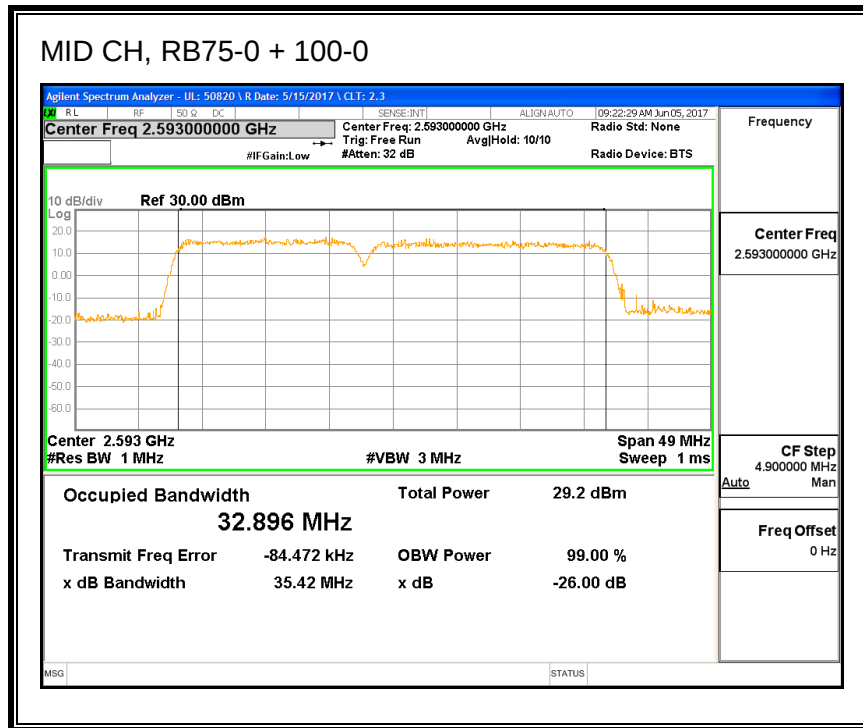


QPSK, (20.0MHz + 15.0MHz BAND WIDTH)

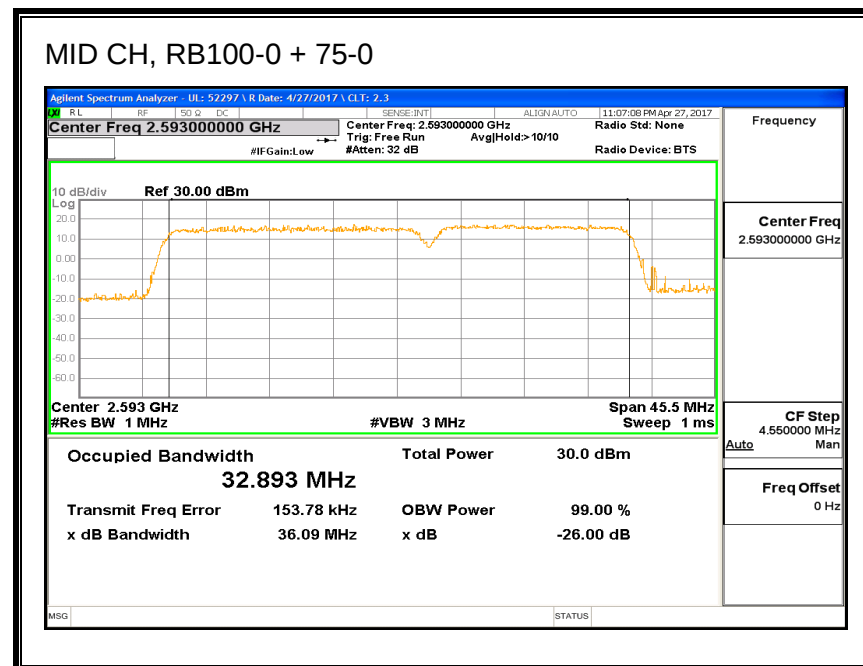

16QAM, (20.0MHz + 15.0MHz BAND WIDTH)

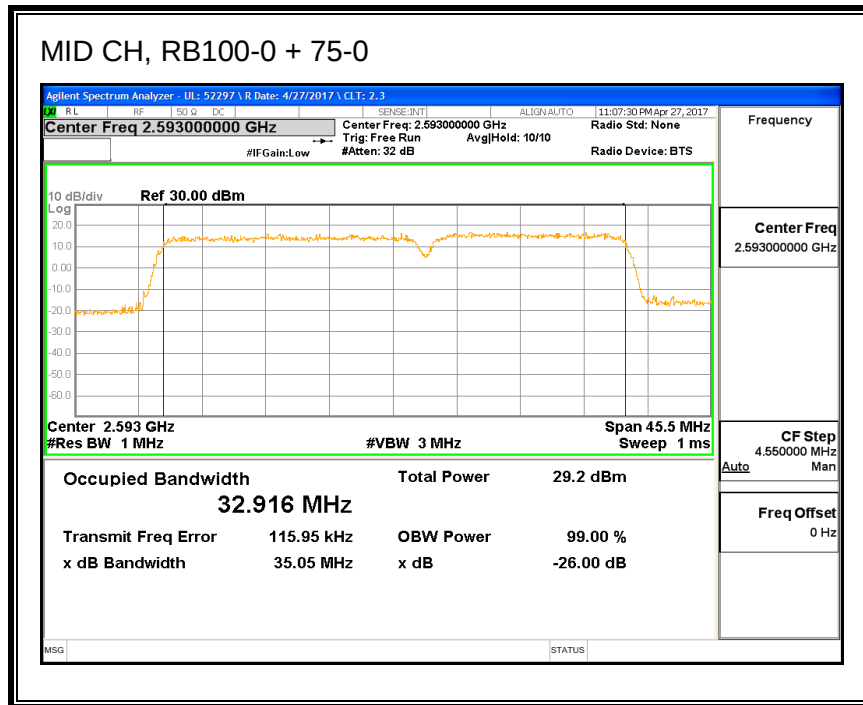

64QAM, (20.0MHz + 15.0MHz BAND WIDTH)

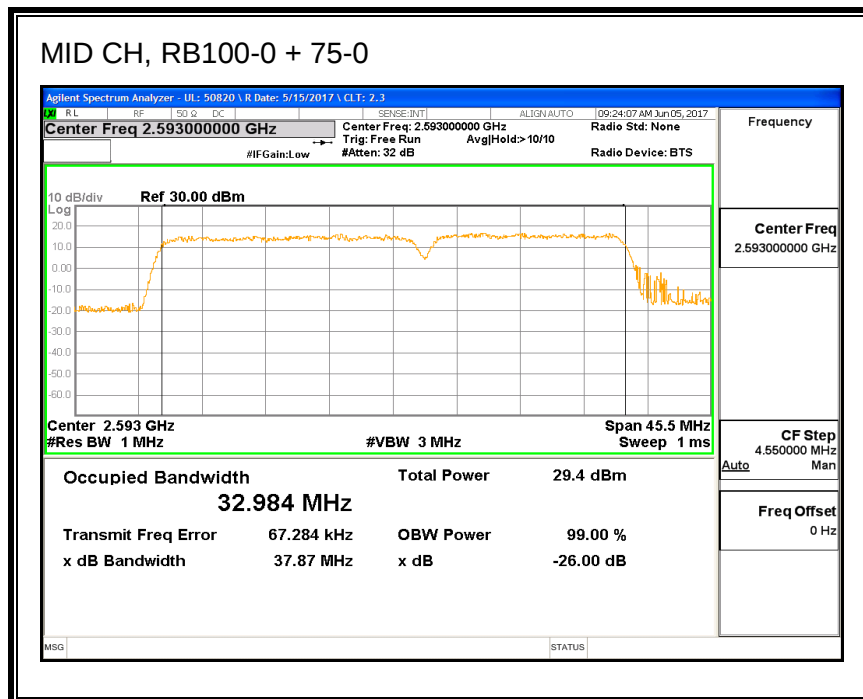

8.2. EMISSION MASK

RULE PART(S)

FCC: §2.1051, §27.53

LIMITS

FCC: §27.53

(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

TEST PROCEDURE FOR FCC PART 27

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

Set resolution bandwidth to at least 1% of emission bandwidth.



MODES TESTED



- LTE Band 7
- LTE Band 41

RESULTS



8.2.1. LTE BAND 7



QPSK, (20.0 MHz + 10.0 MHz BAND WIDTH)

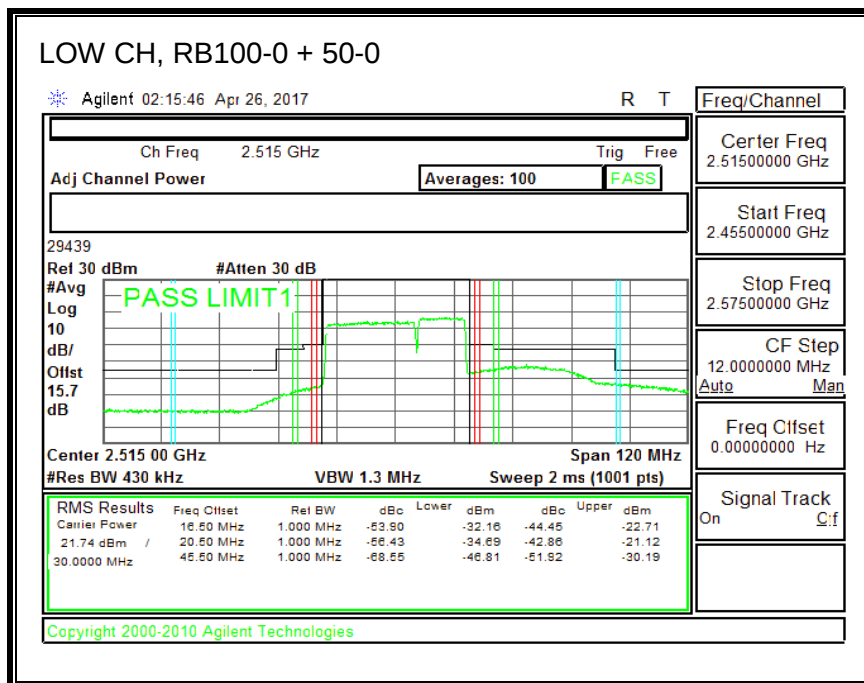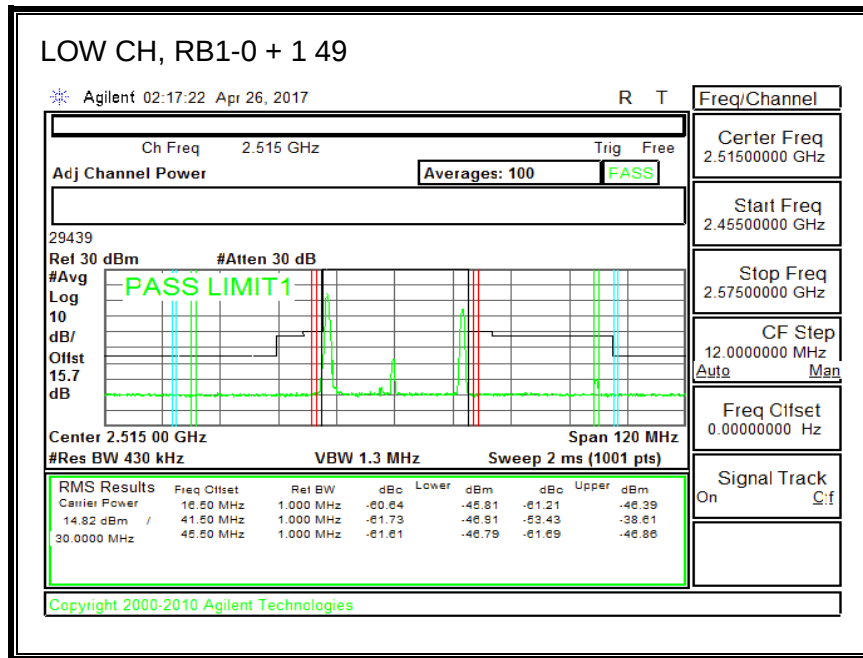

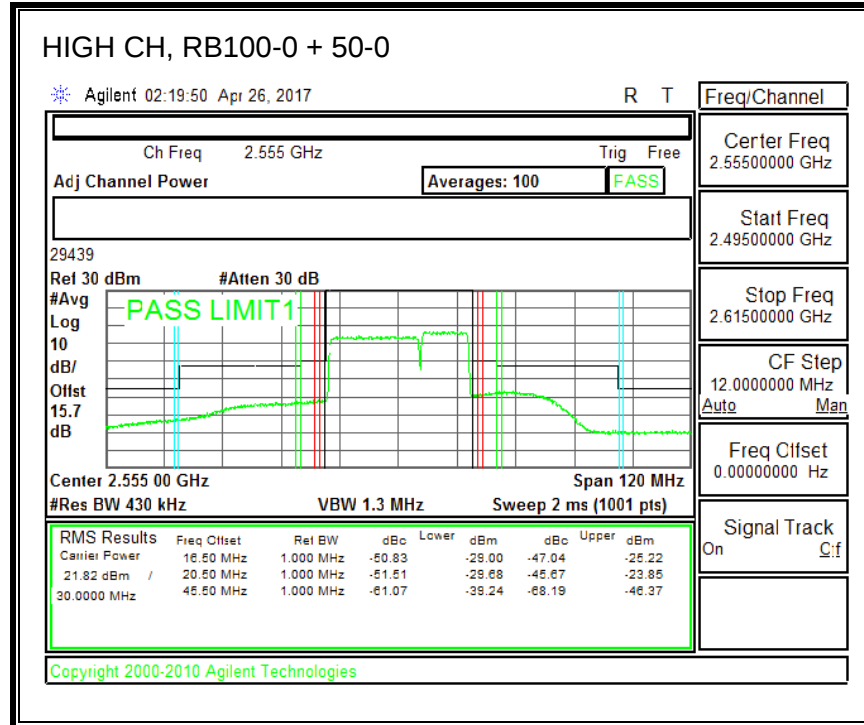
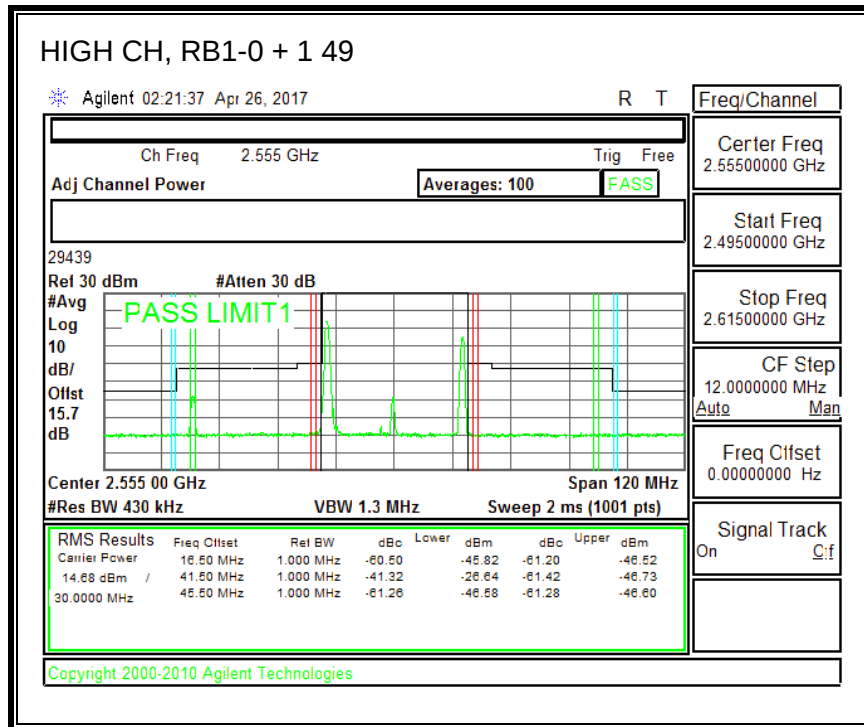




16QAM (20.0 MHz + 10.0 MHz BAND WIDTH)

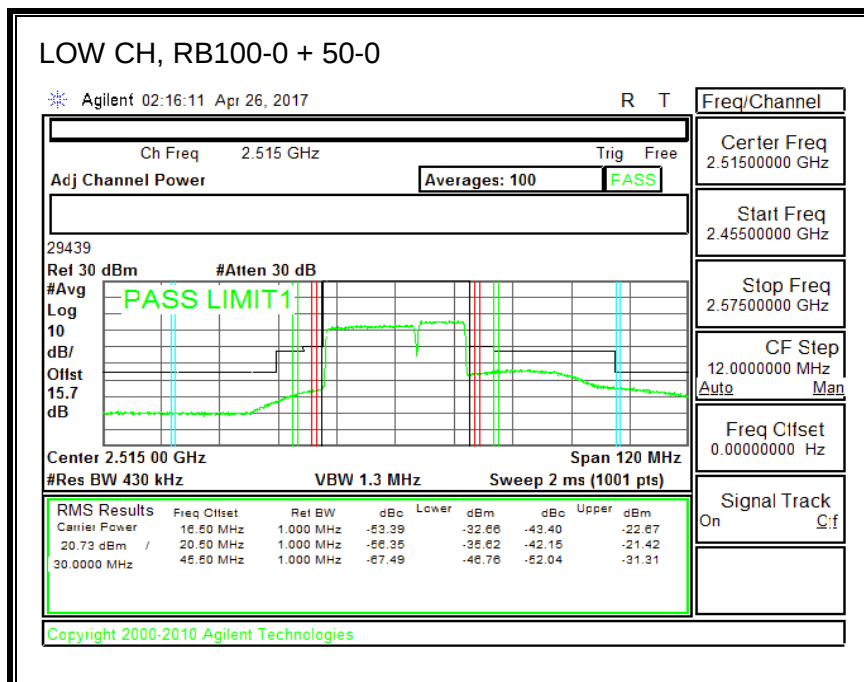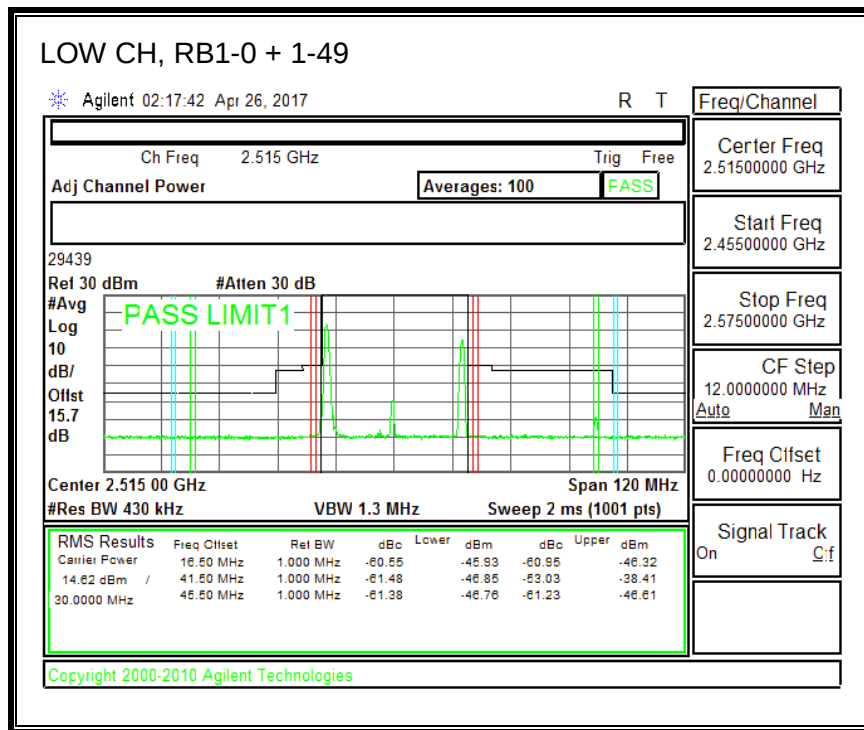

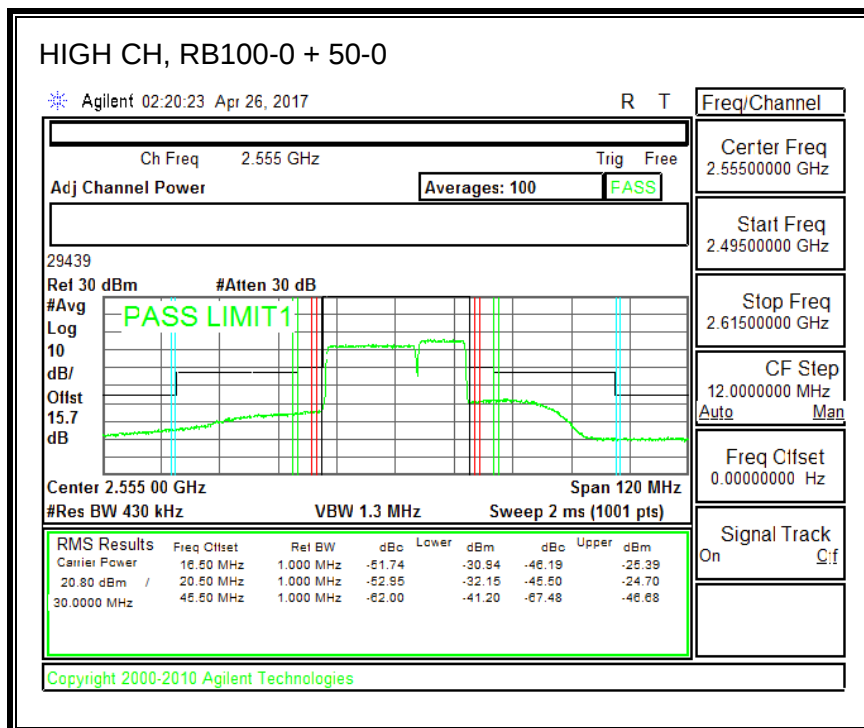
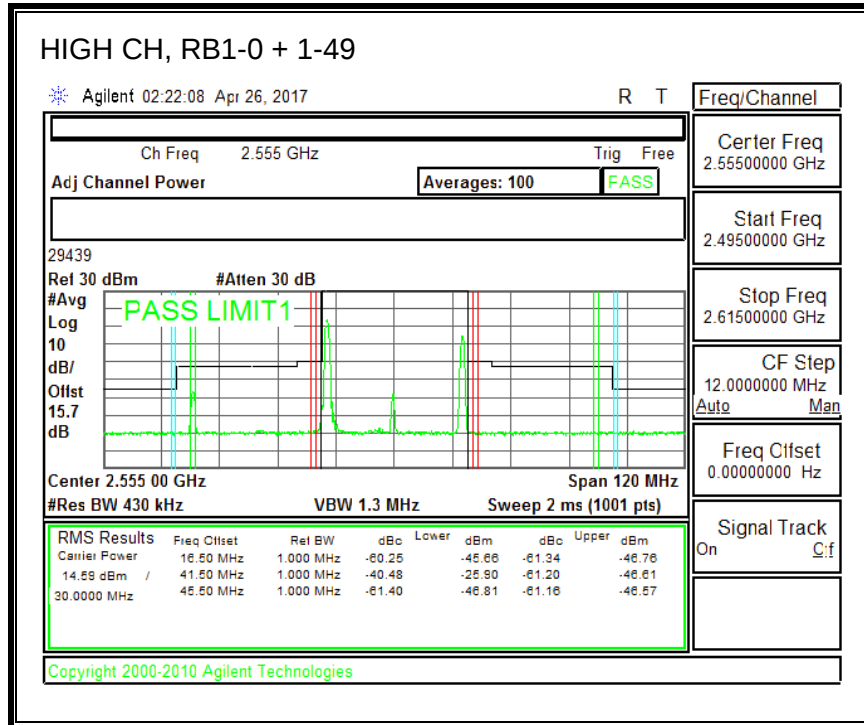




QPSK, (20.0 MHz + 20.0 MHz BAND WIDTH)

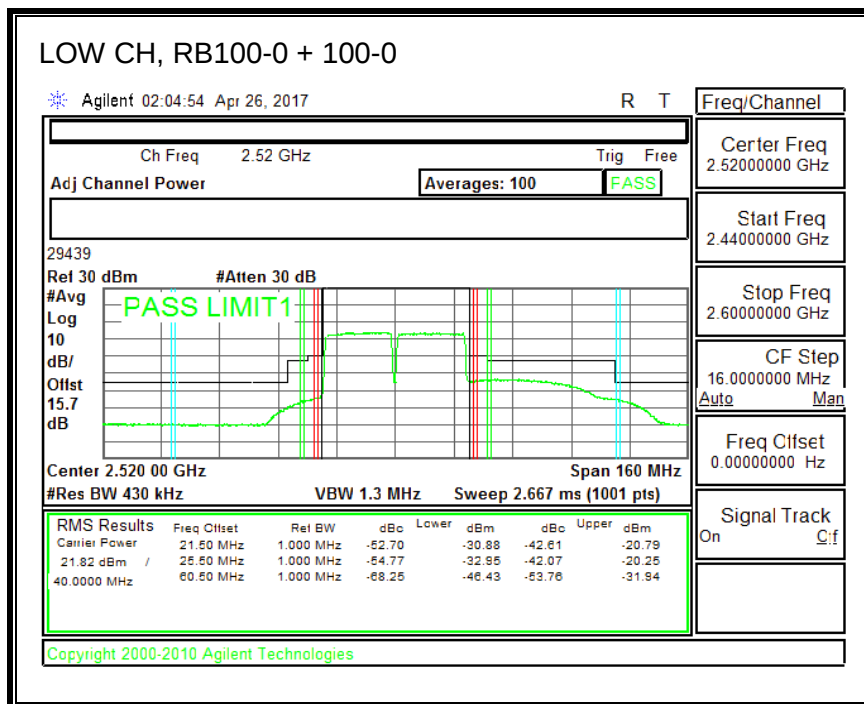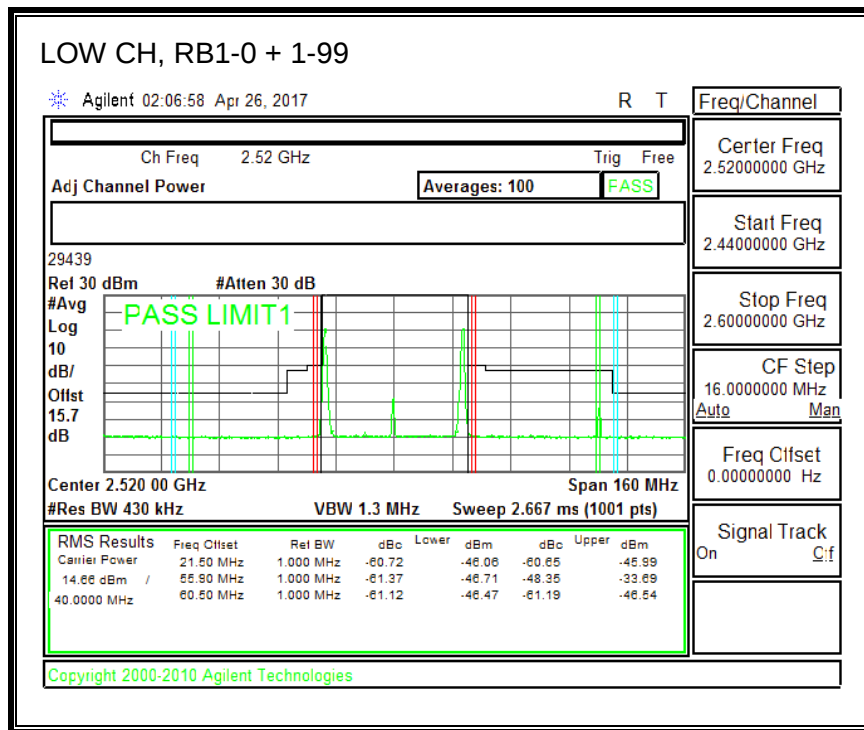

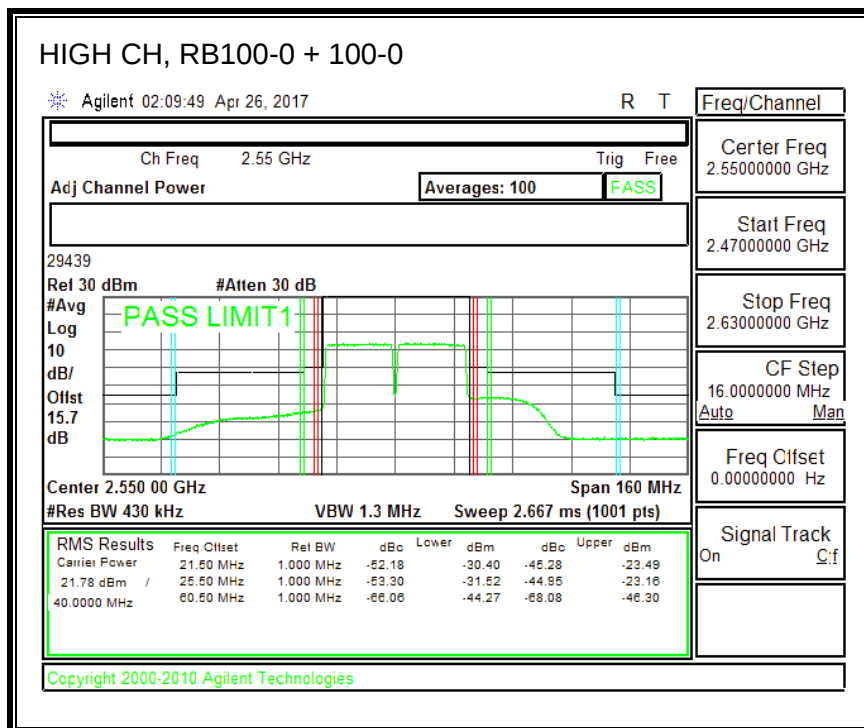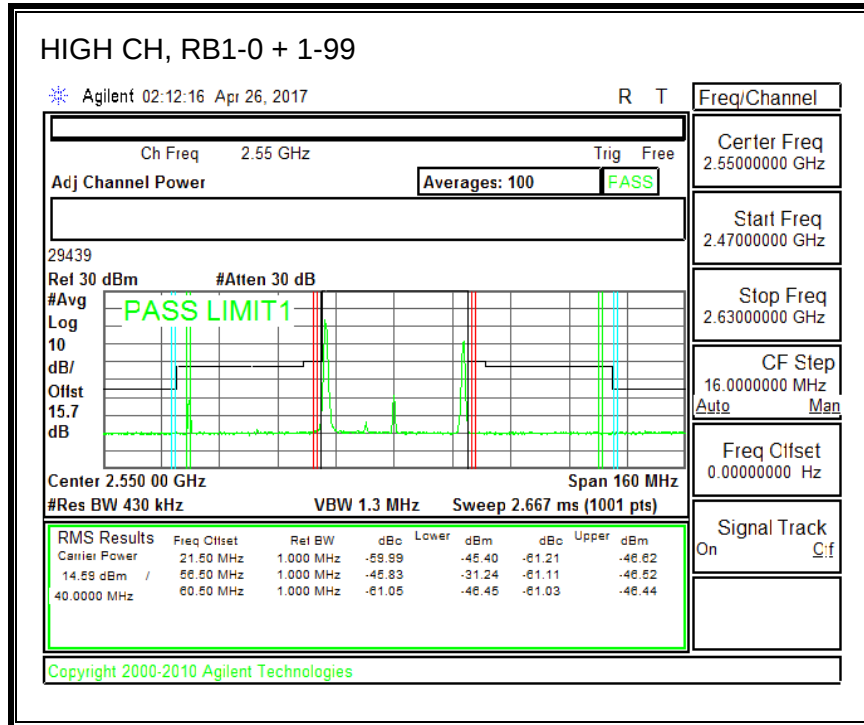



16QAM (20.0 MHz + 20.0 MHz BAND WIDTH)

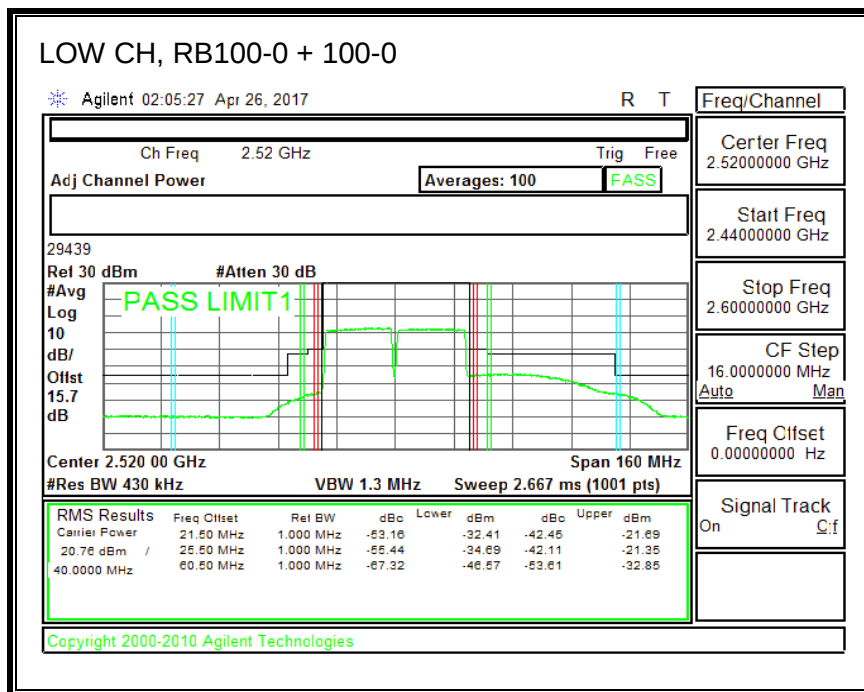
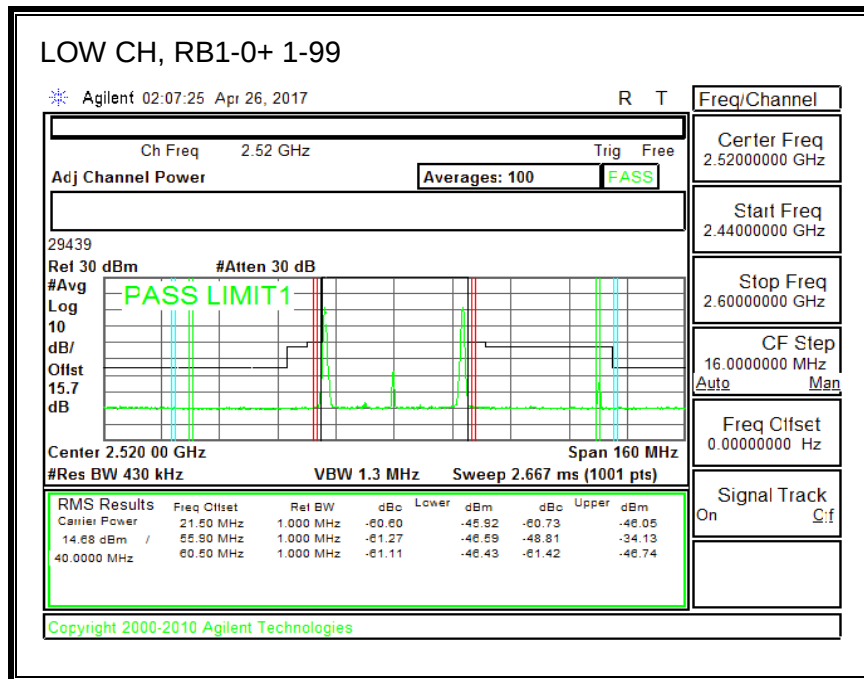


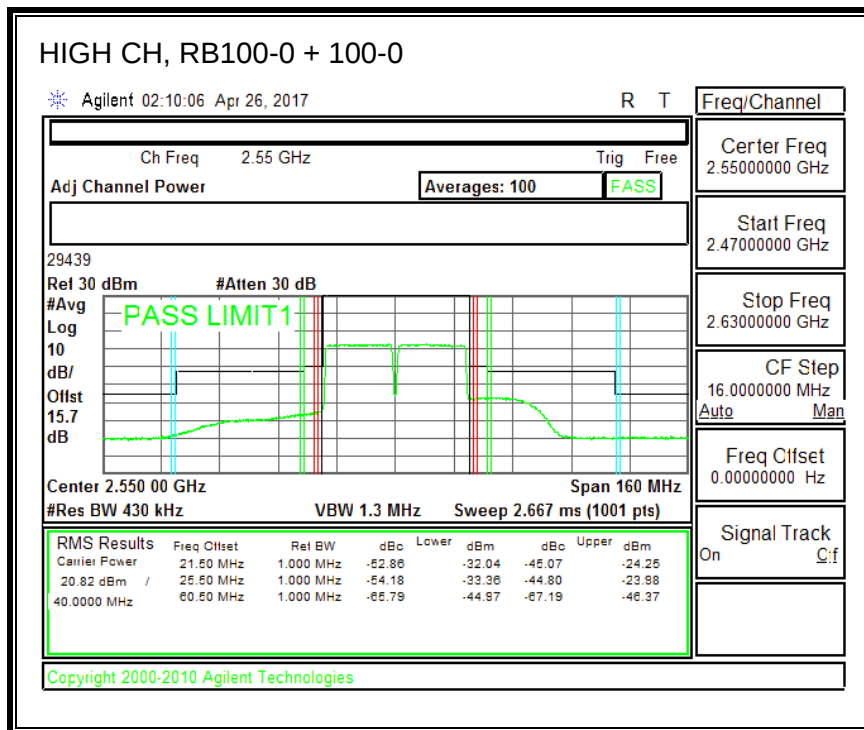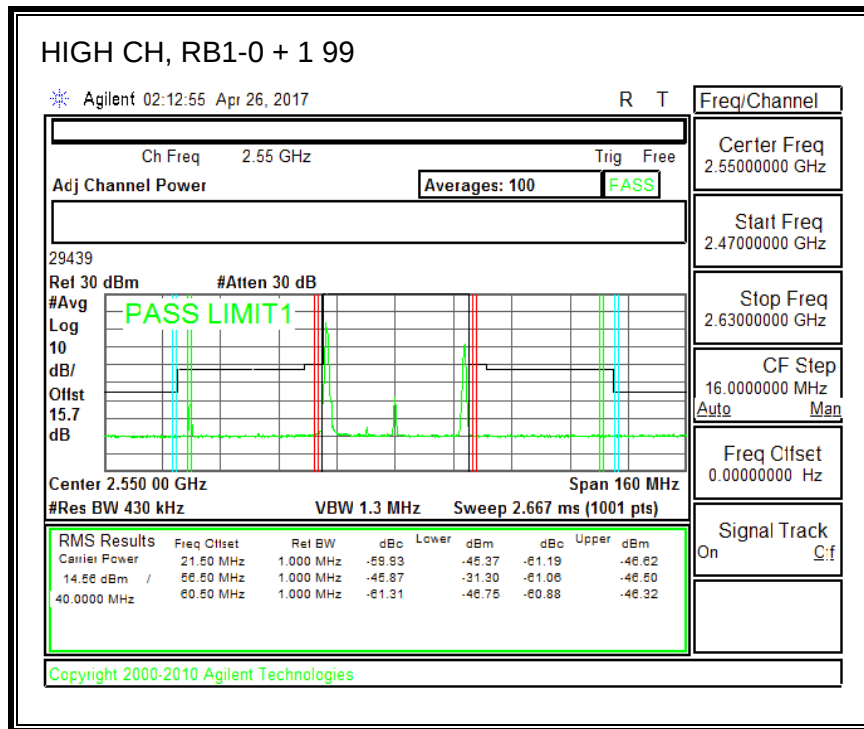



8.2.2. LTE BAND 41



QPSK, (20.0 MHz + 5.0 MHz BAND WIDTH)

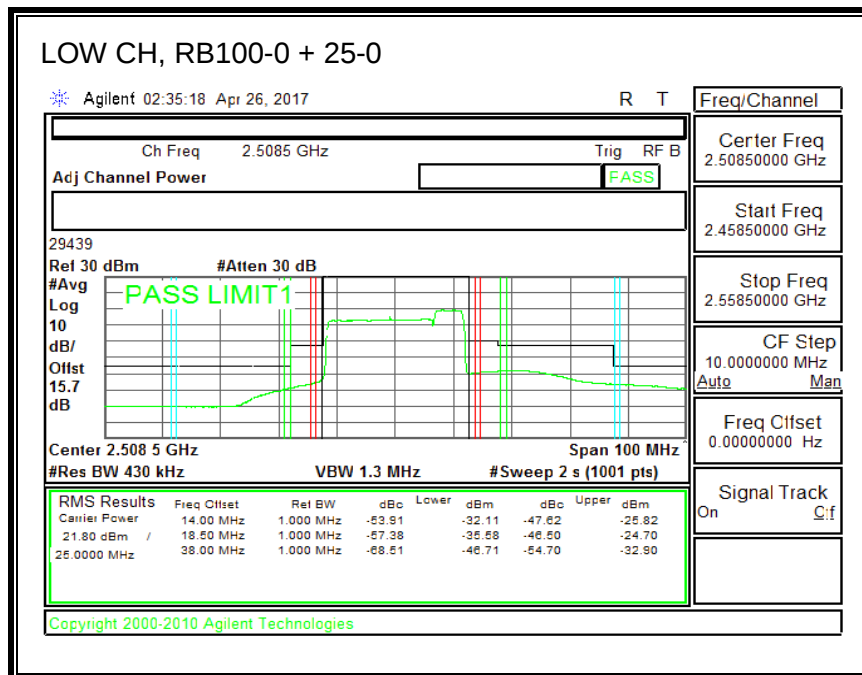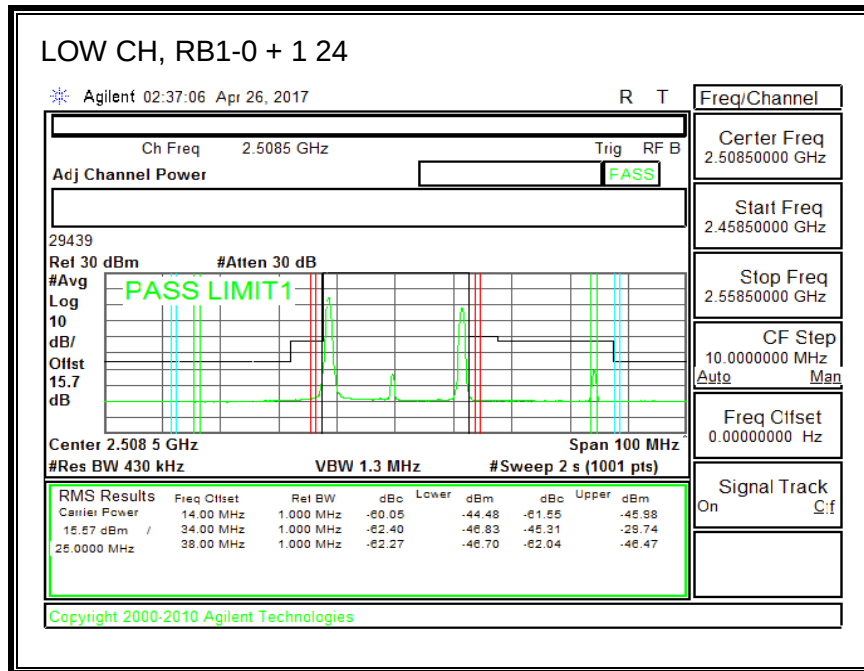

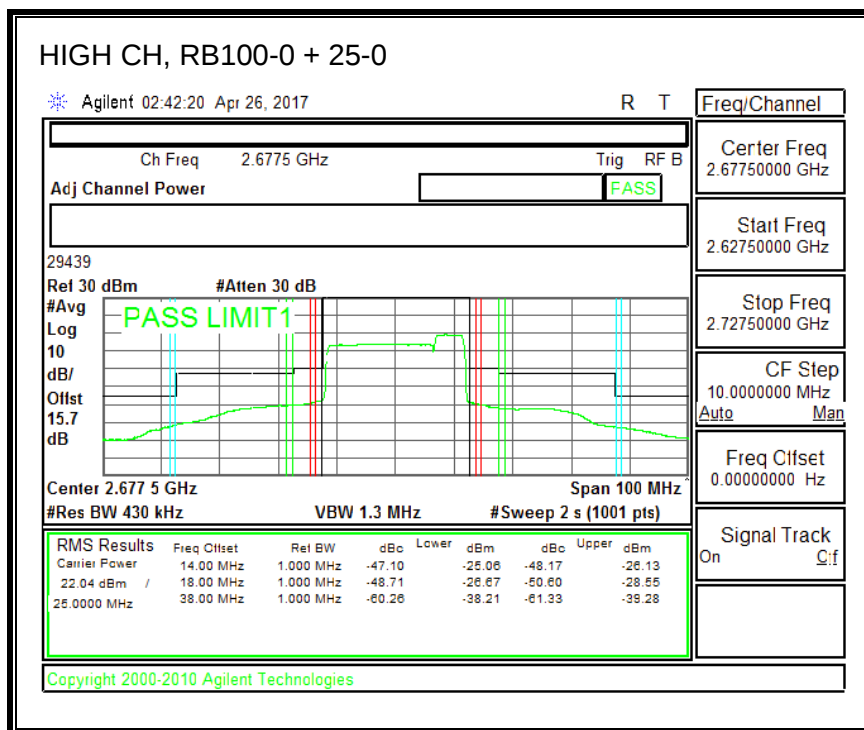
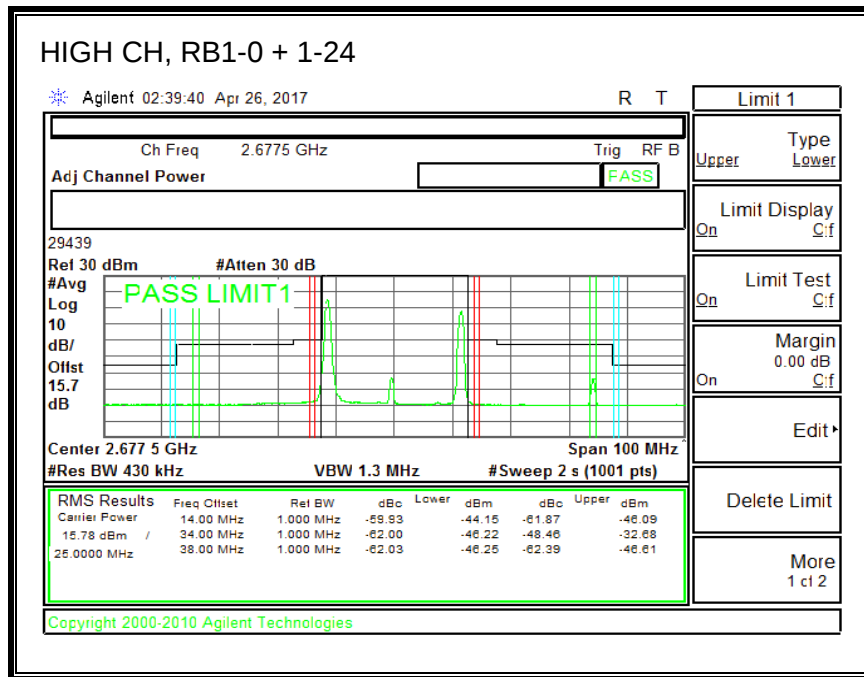




16QAM (20.0 MHz + 5.0 MHz BAND WIDTH)

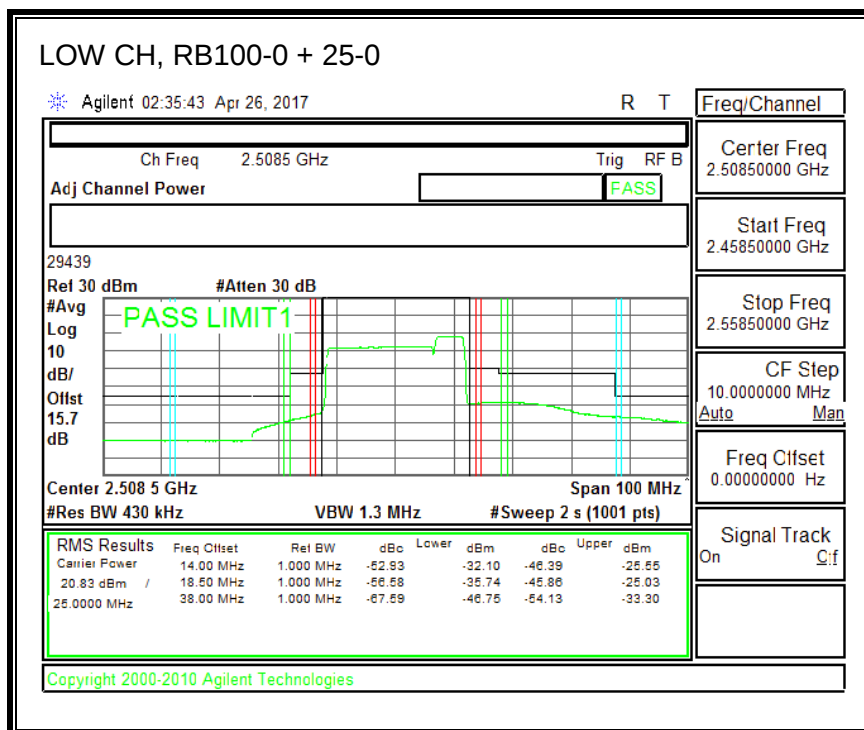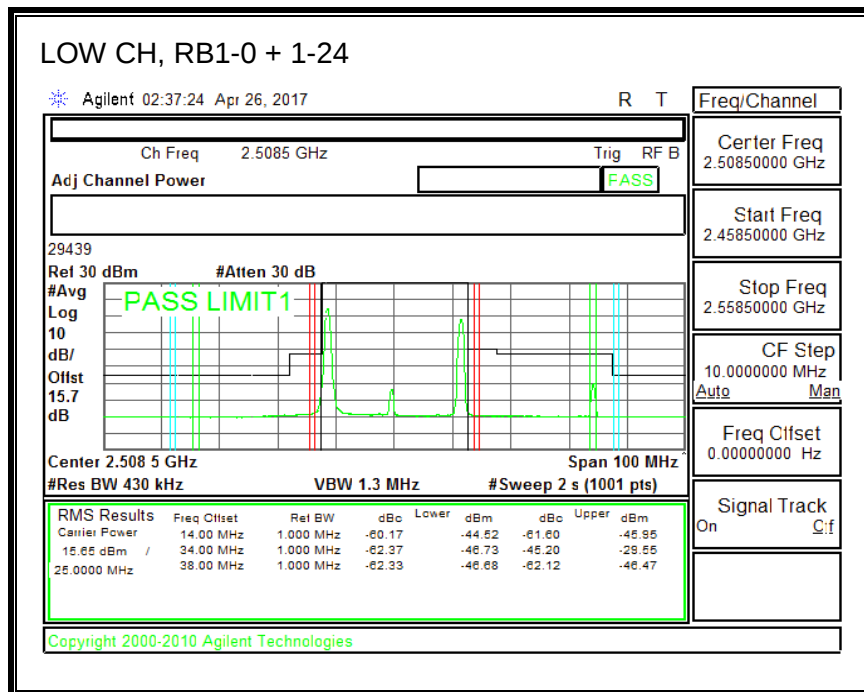

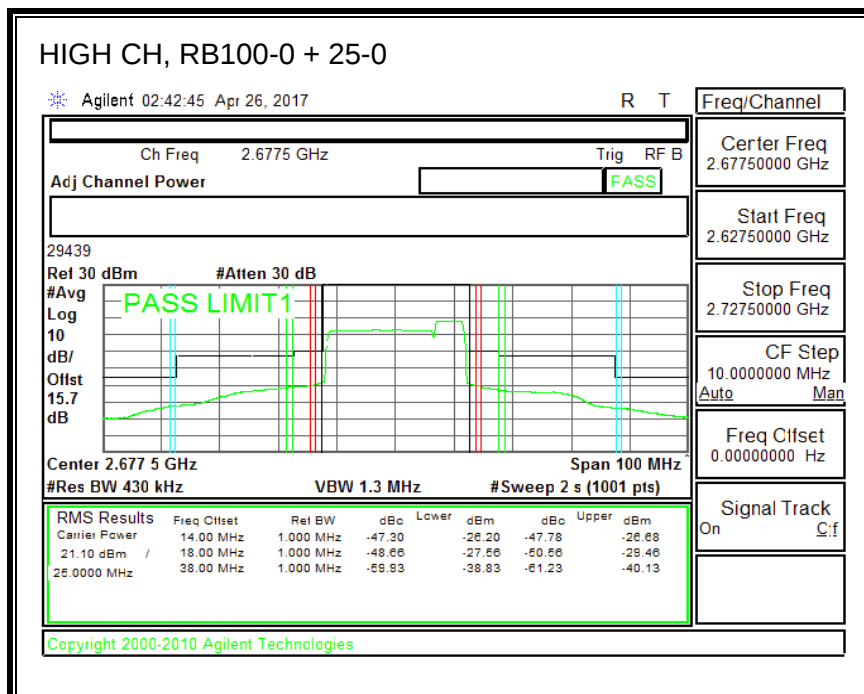
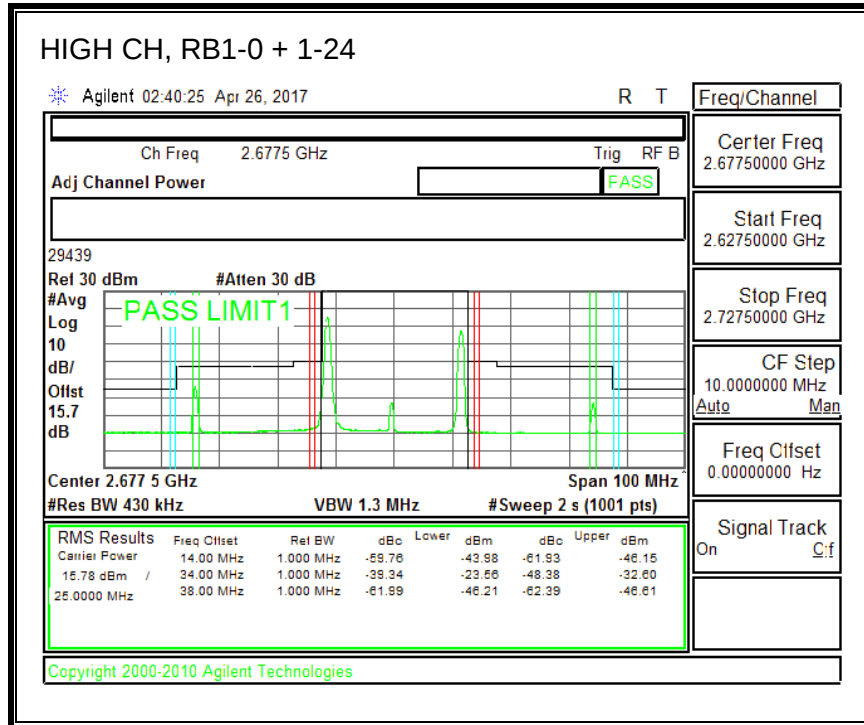




QPSK, (20.0 MHz + 20.0 MHz BAND WIDTH)

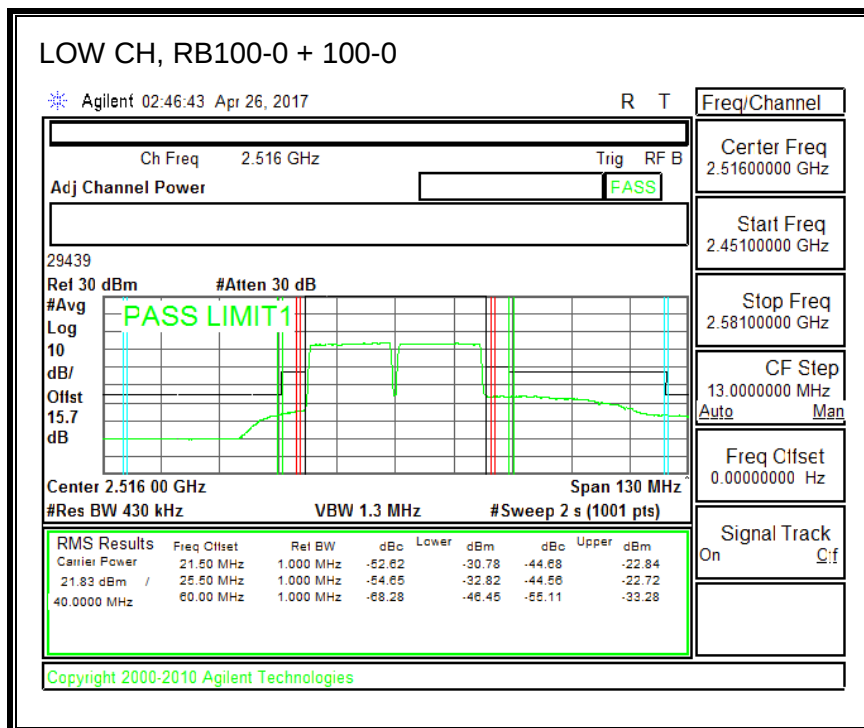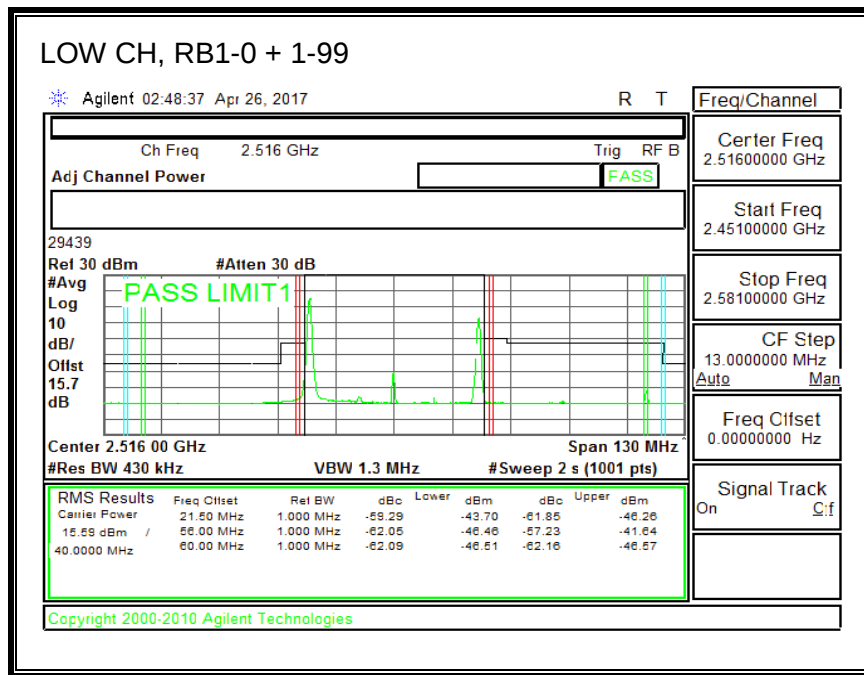

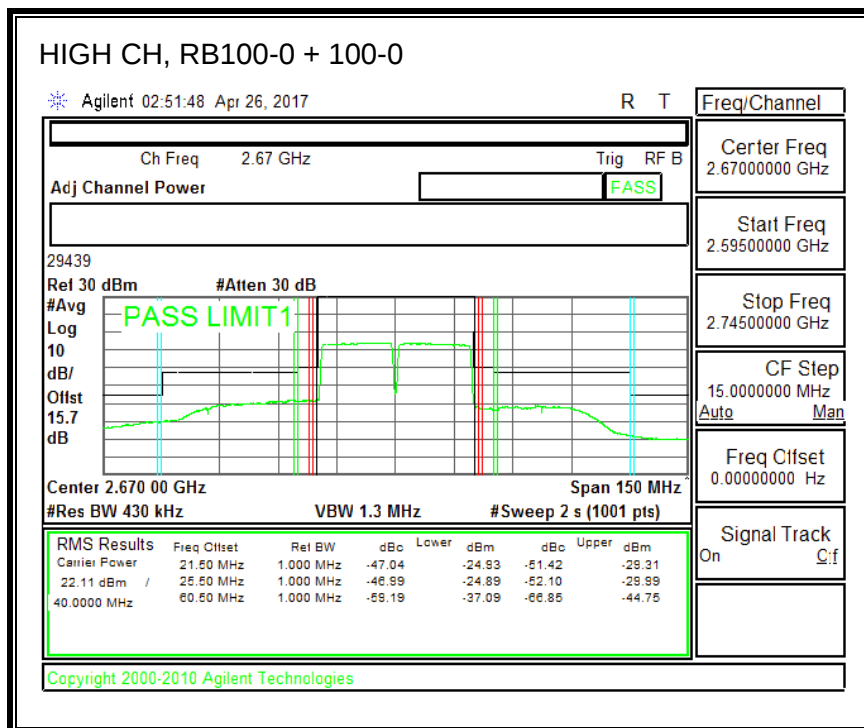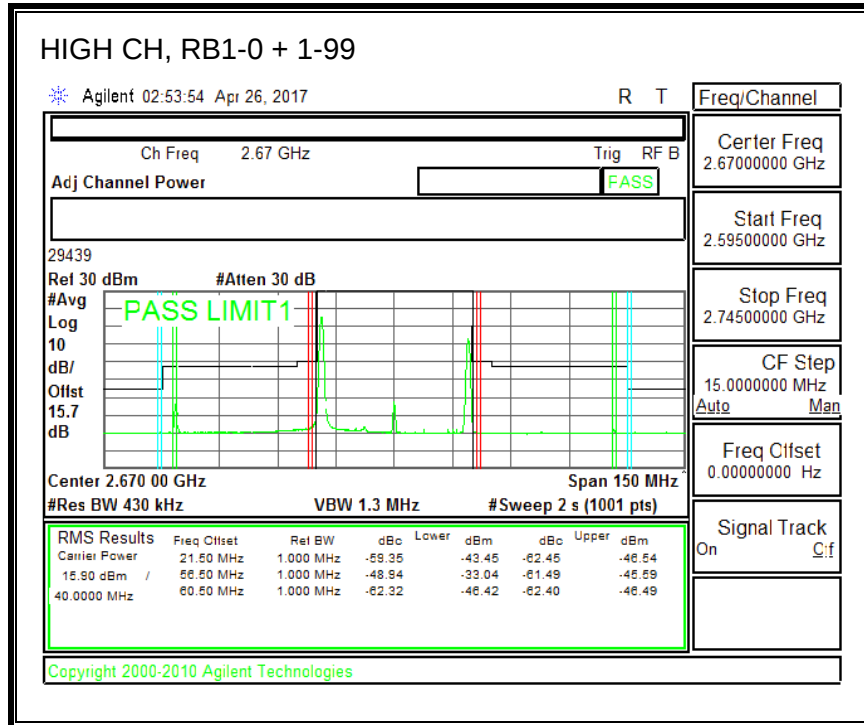

16QAM (20.0 MHz + 20.0 MHz BAND WIDTH)

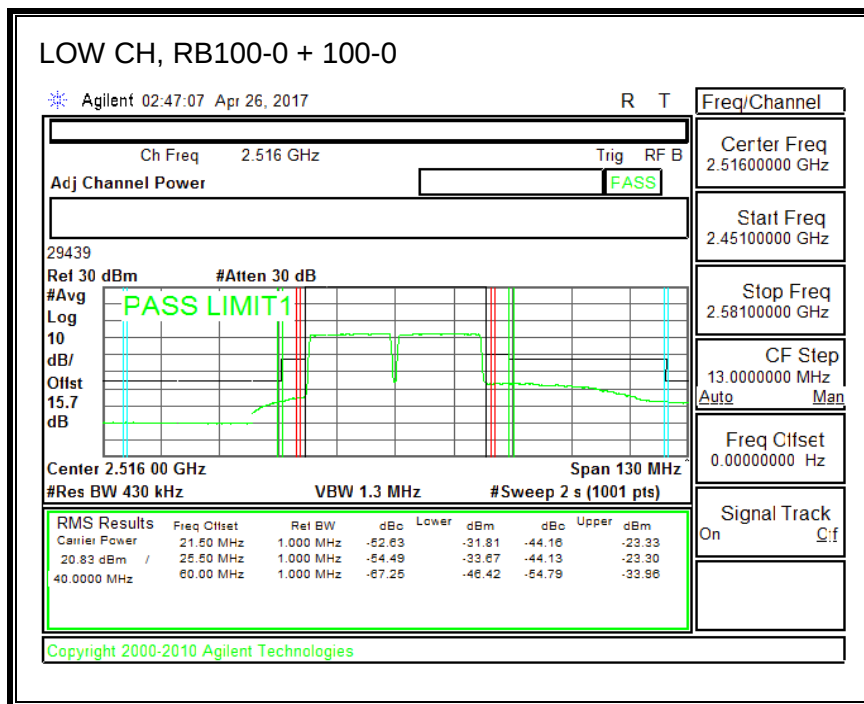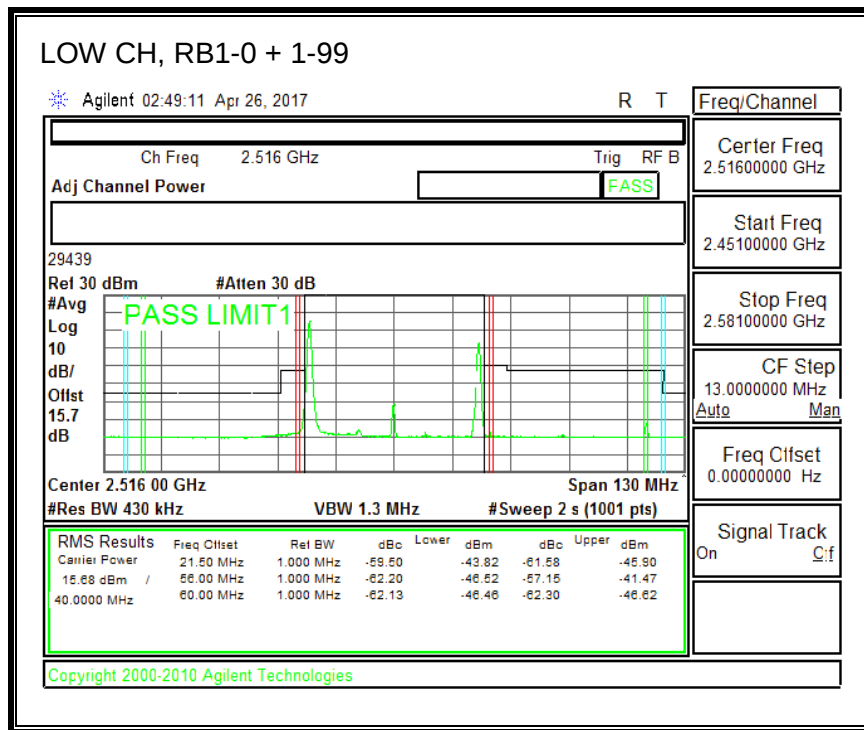

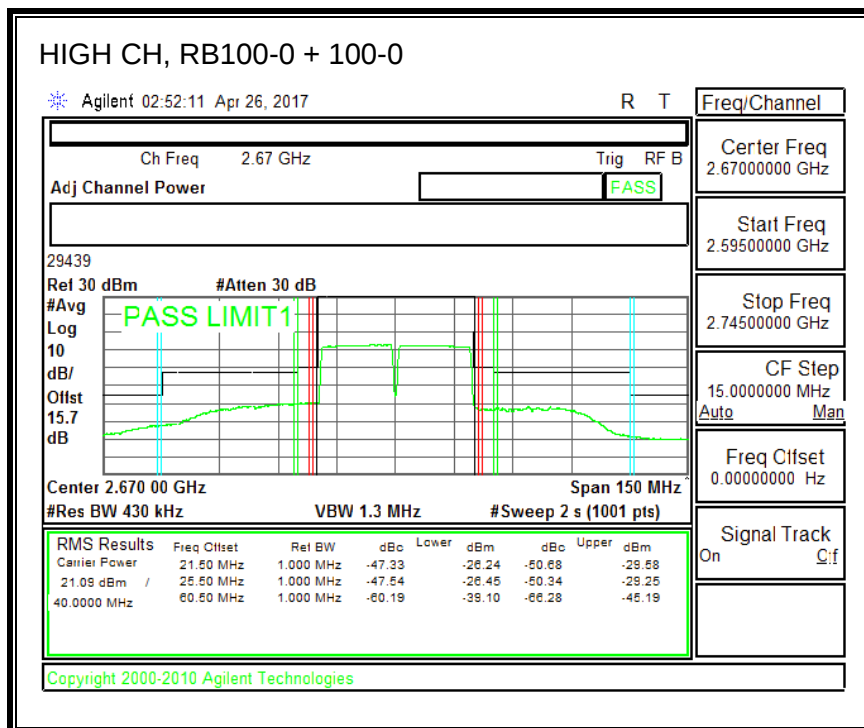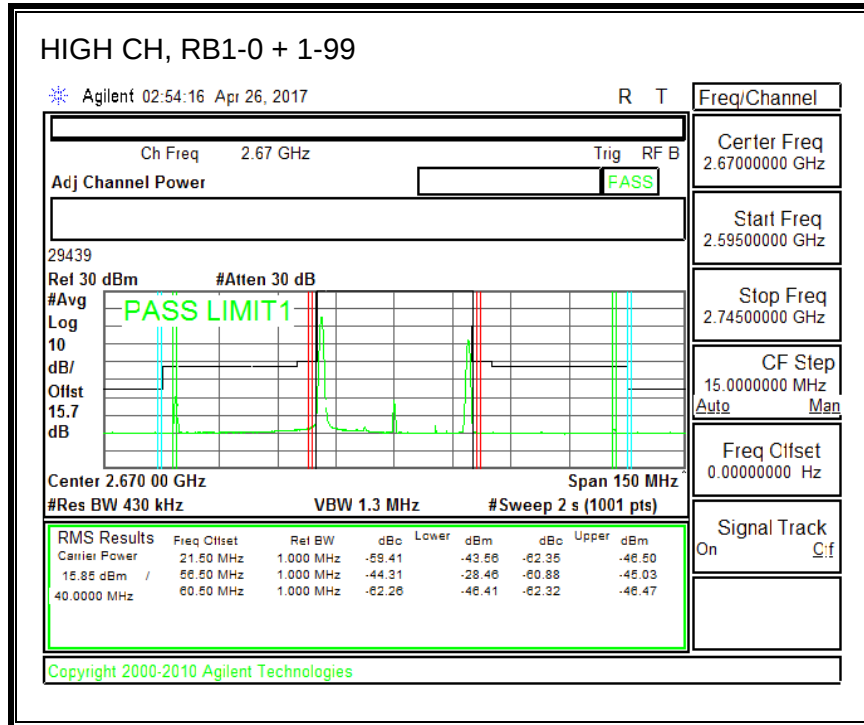

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:



- Set display line at -25 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz. (NOTE: Worst case set RBW/VBW to 1MHz/3MHz)


MODES TESTED

- LTE Band 7
- LTE Band 41


8.3.1. LTE BAND 7

QPSK, (20.0 MHz+ 10.0 MHz BAND WIDTH)

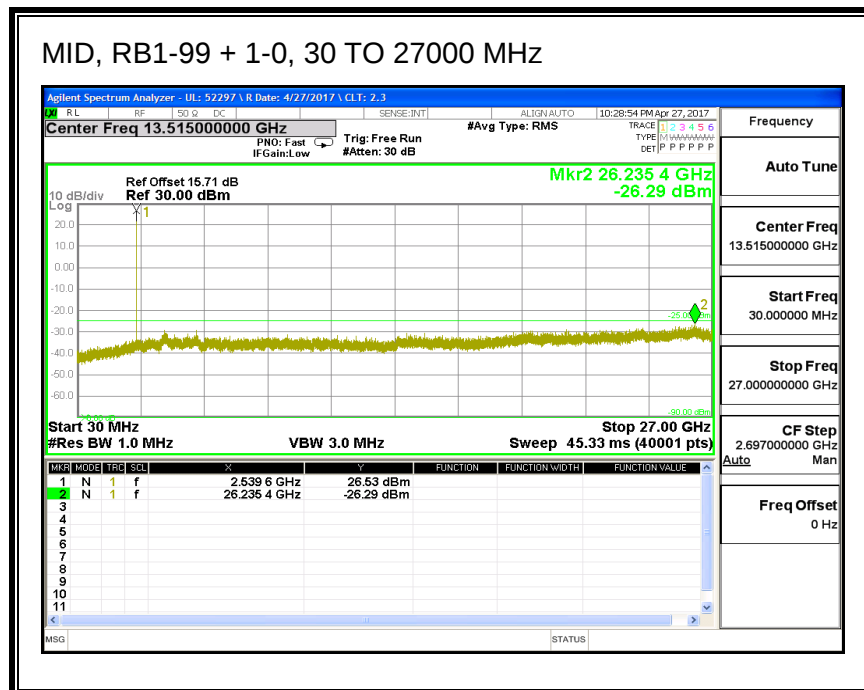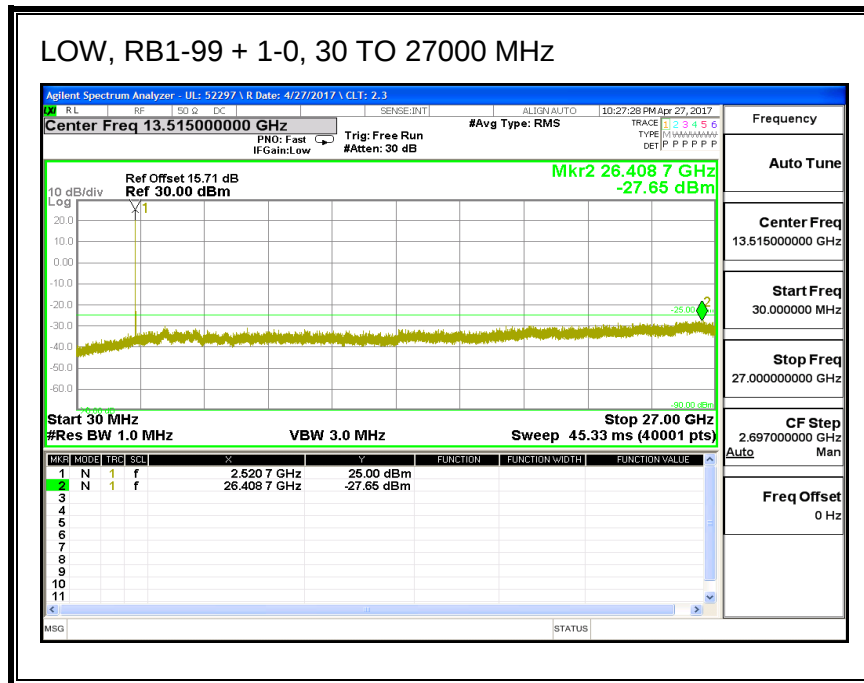


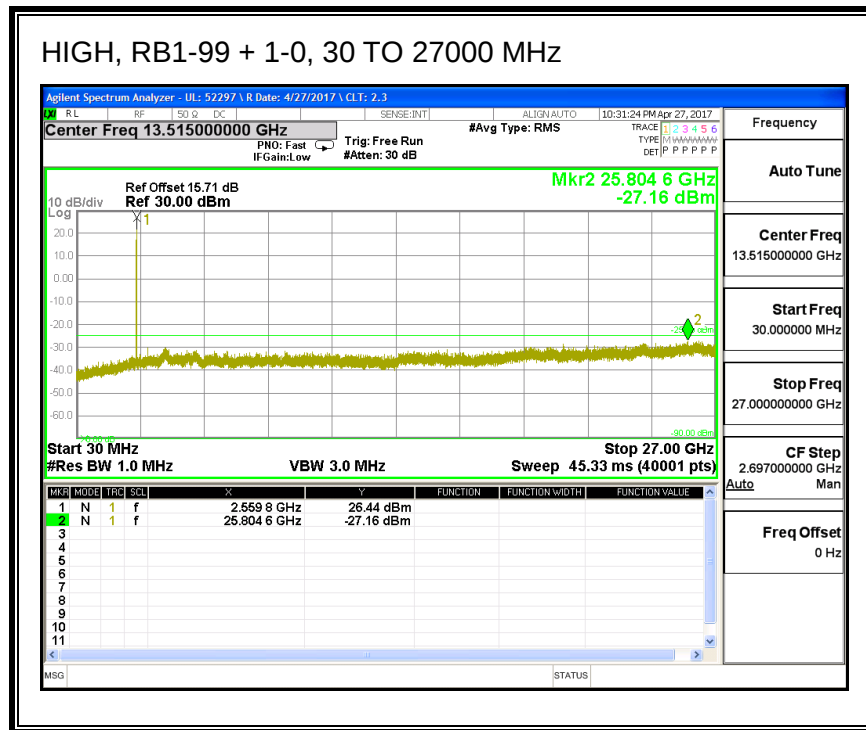


16QAM, (20.0 MHz+ 10.0 MHz BAND WIDTH)

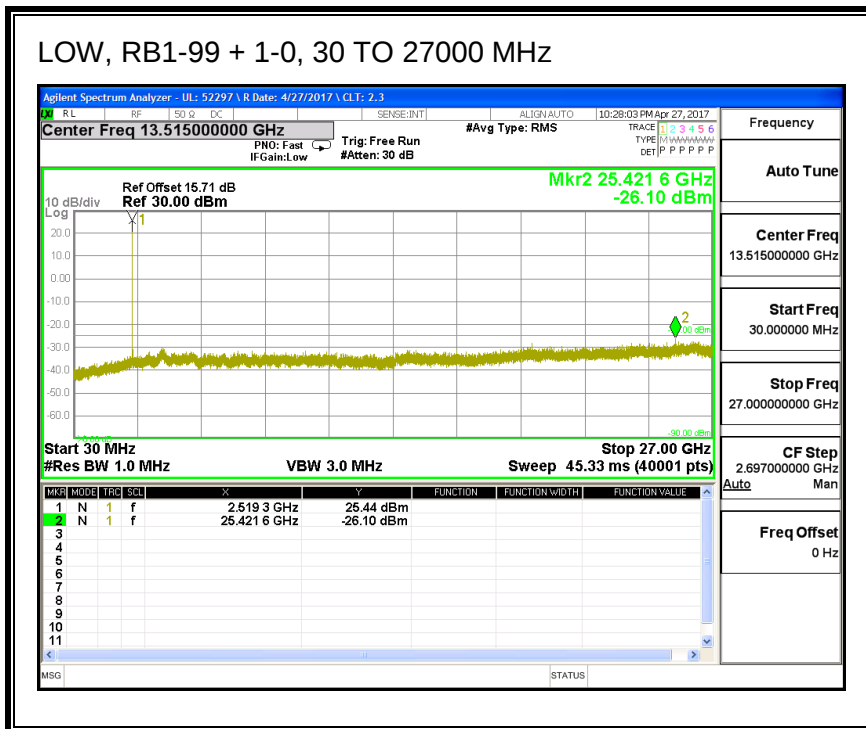



MID, RB1-99 + 1-0, 30 TO 27000 MHz

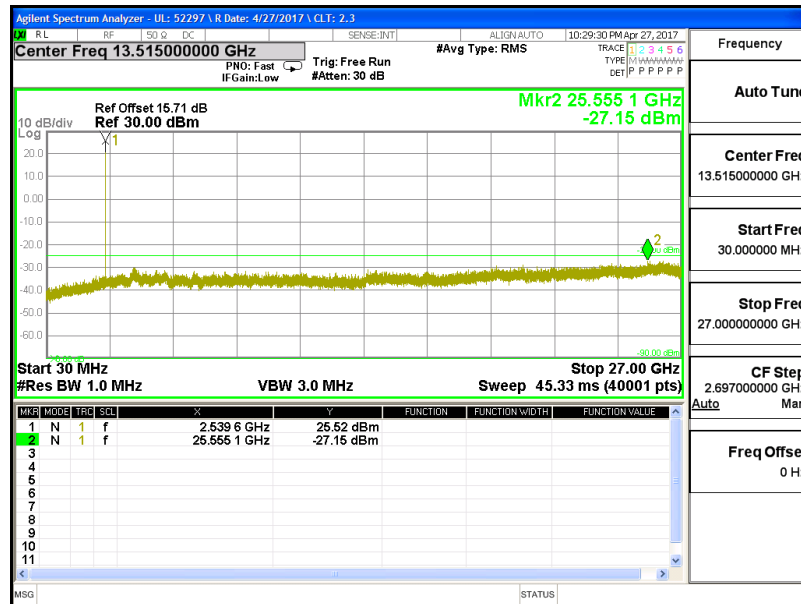


HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

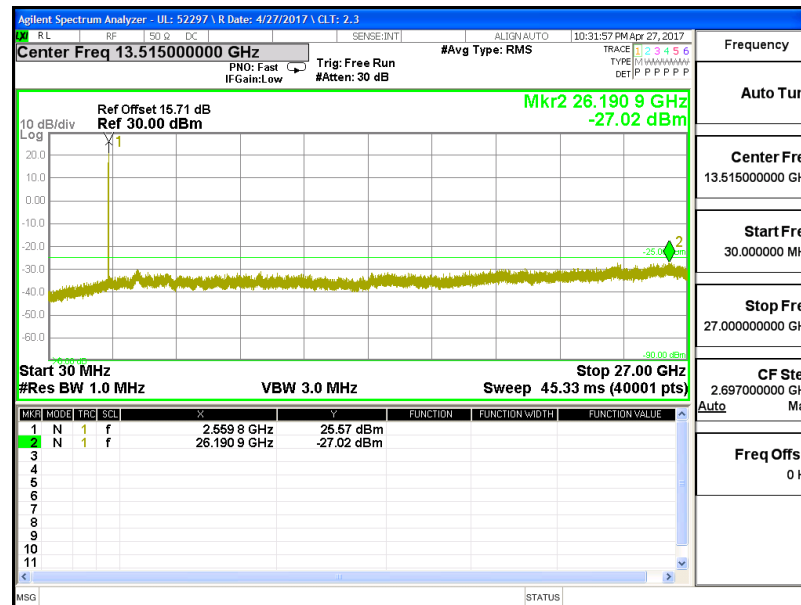




QPSK, (20.0 MHz+ 20.0 MHz BAND WIDTH)

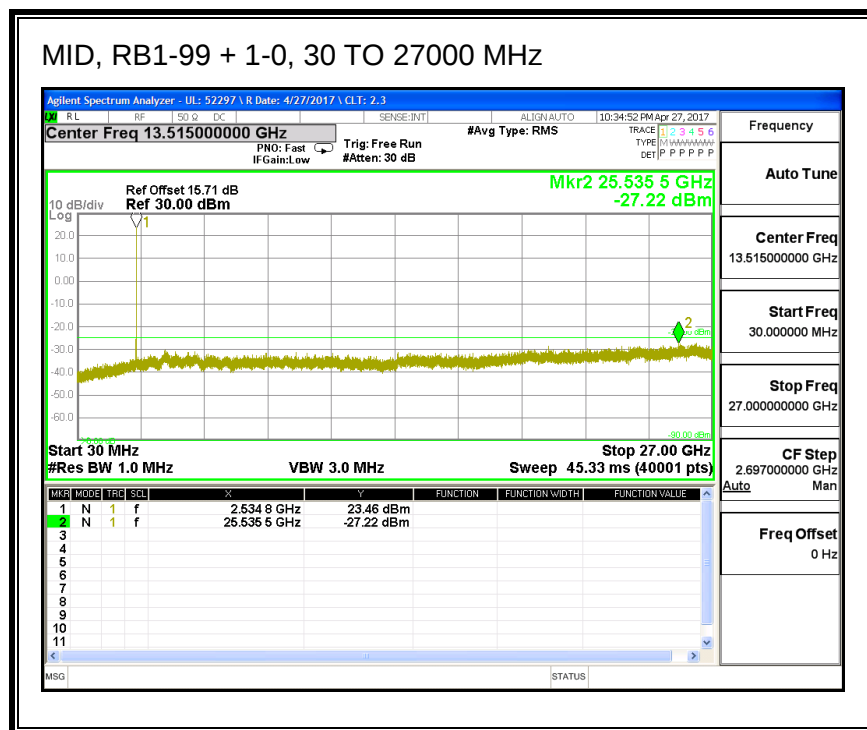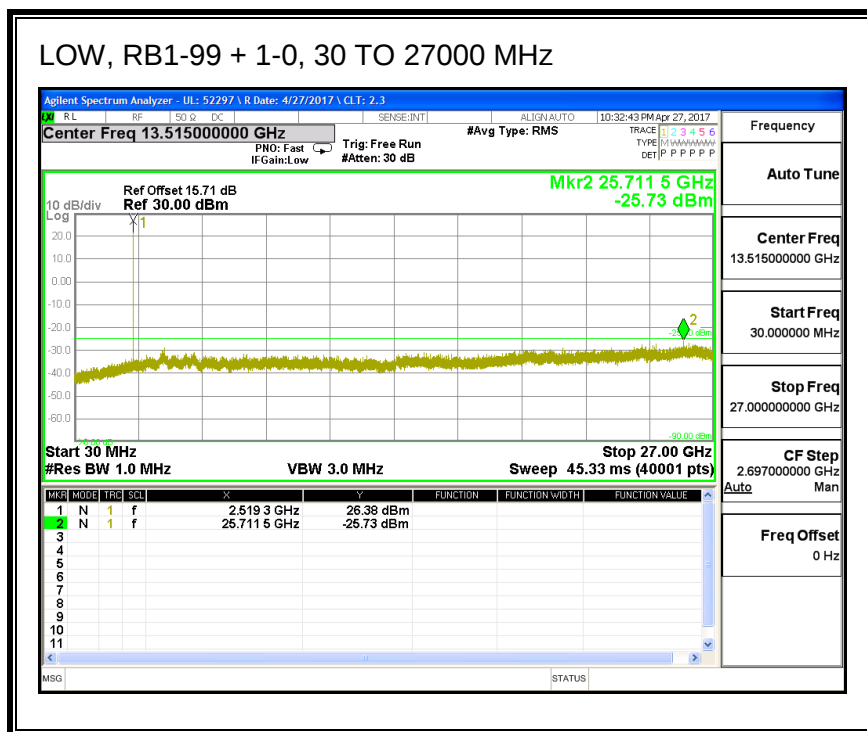

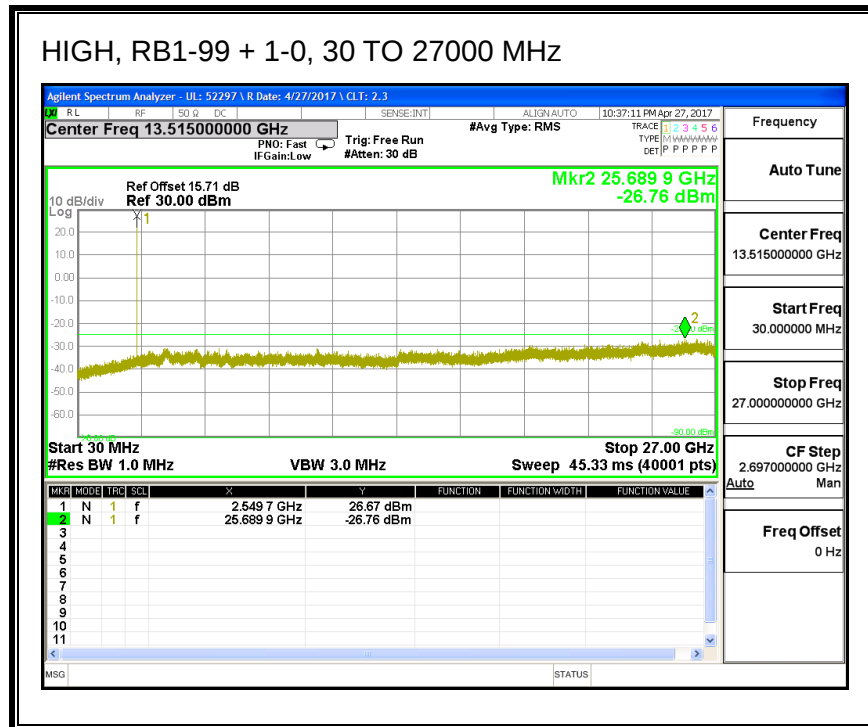



16QAM, (20.0 MHz+ 20.0 MHz BAND WIDTH)

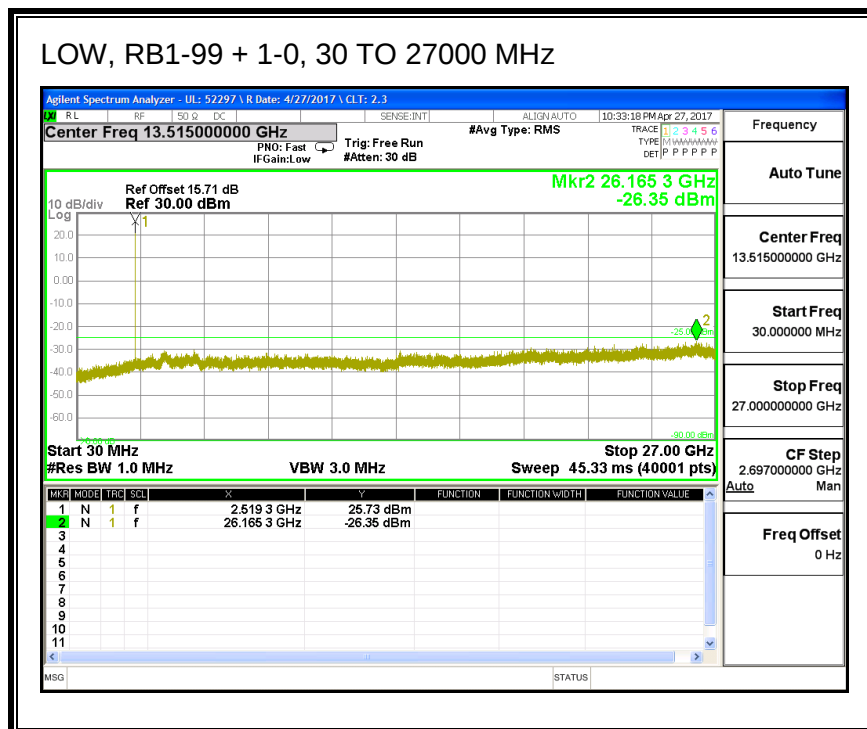

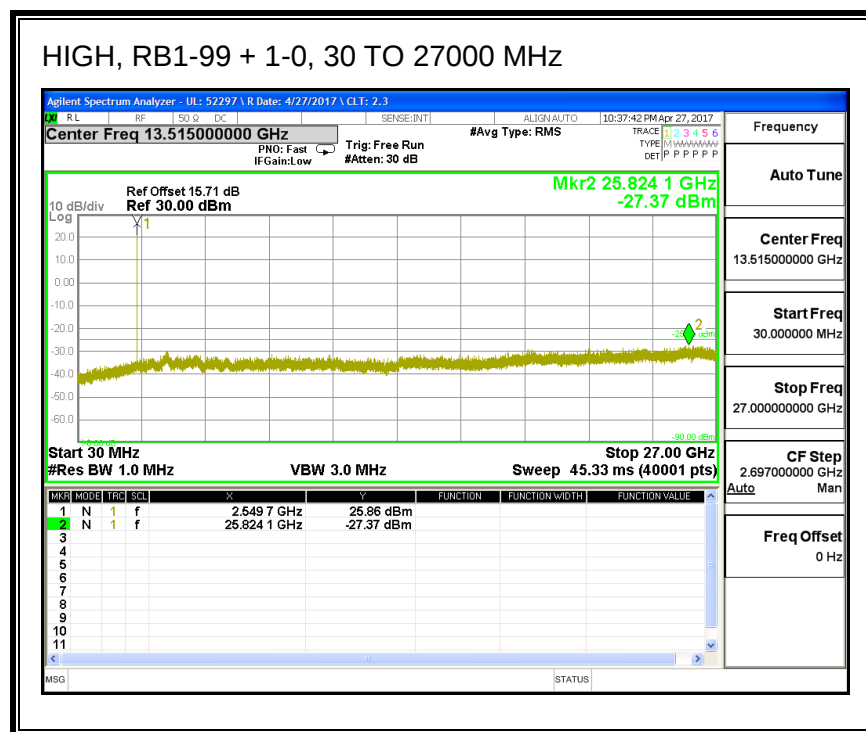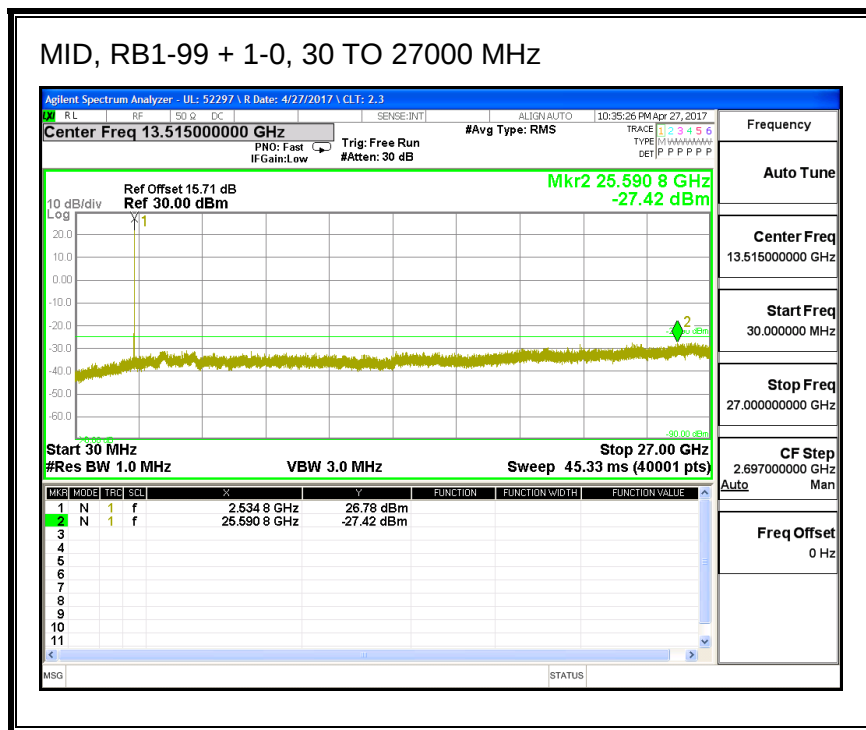


8.3.2. LTE BAND 41

QPSK, (20.0 MHz+ 5.0 MHz BAND WIDTH)

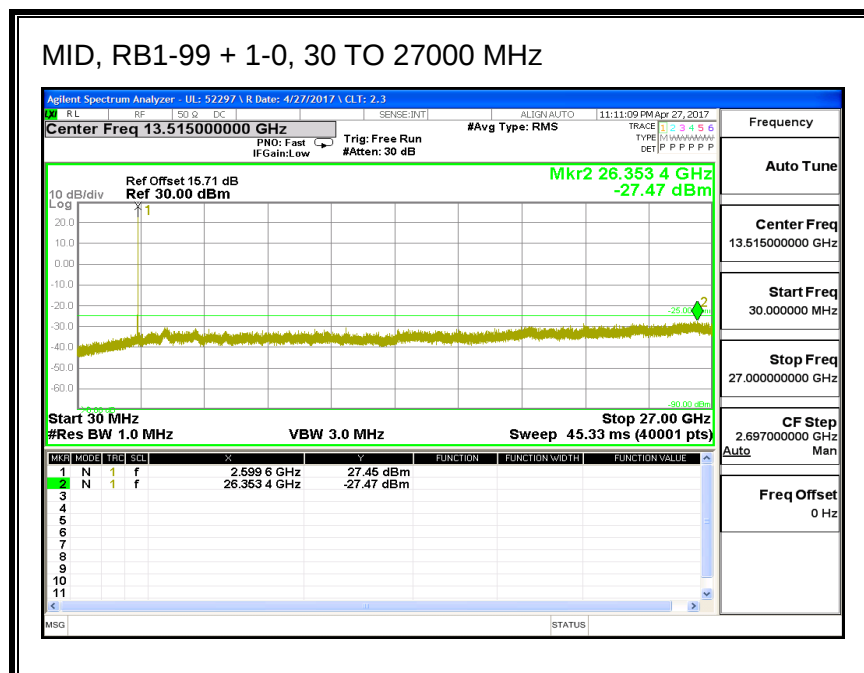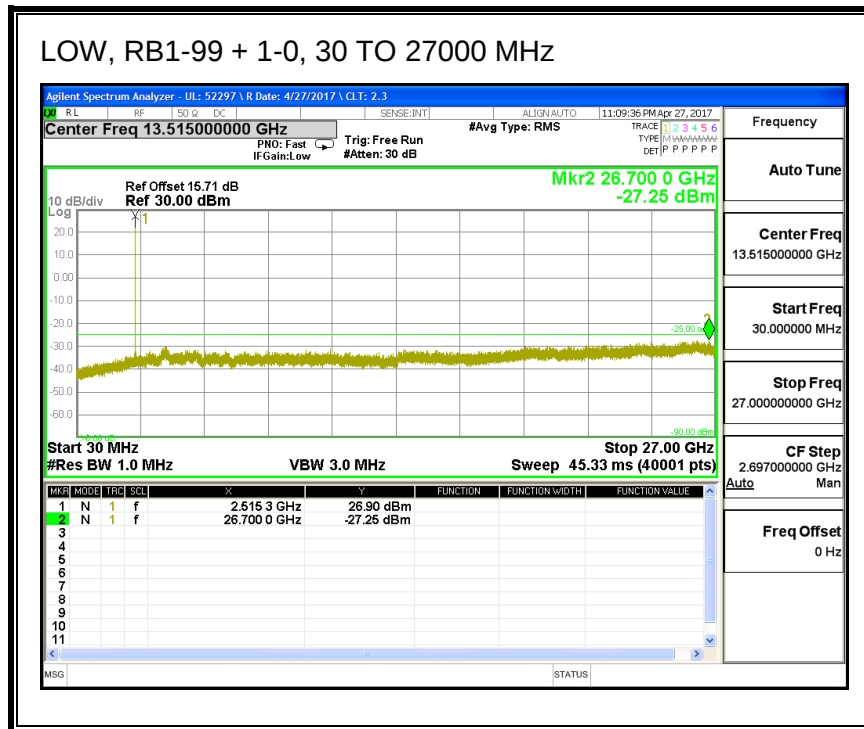


HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

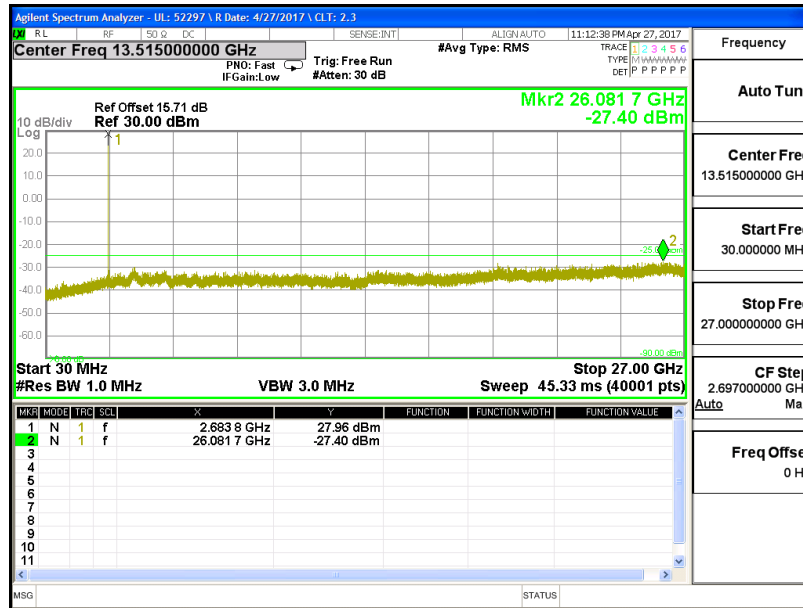


16QAM, (20.0 MHz+ 5.0 MHz BAND WIDTH)


LOW, RB1-99 + 1-0, 30 TO 27000 MHz

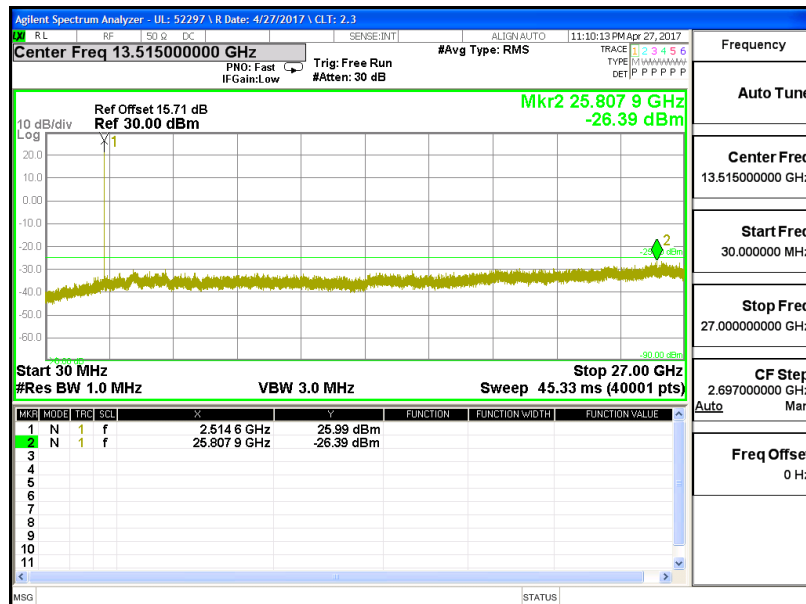



MID, RB1-99 + 1-0, 30 TO 27000 MHz

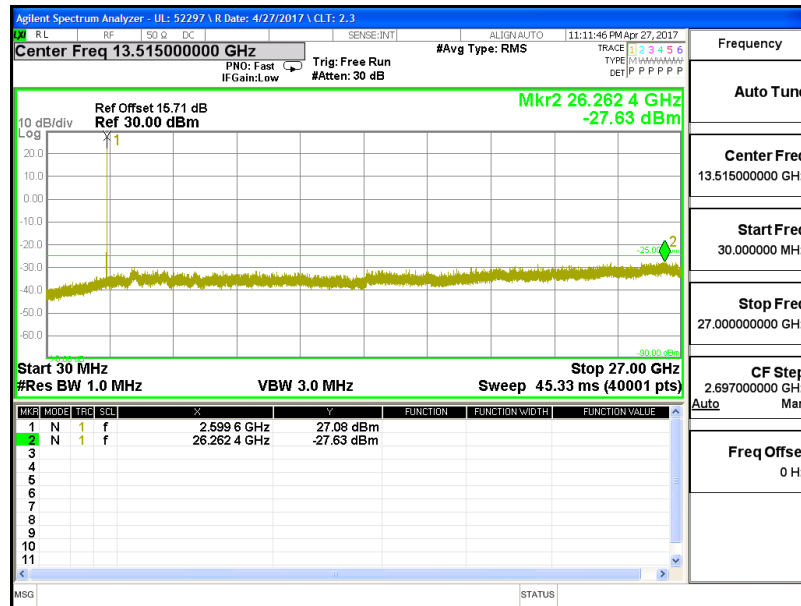


HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

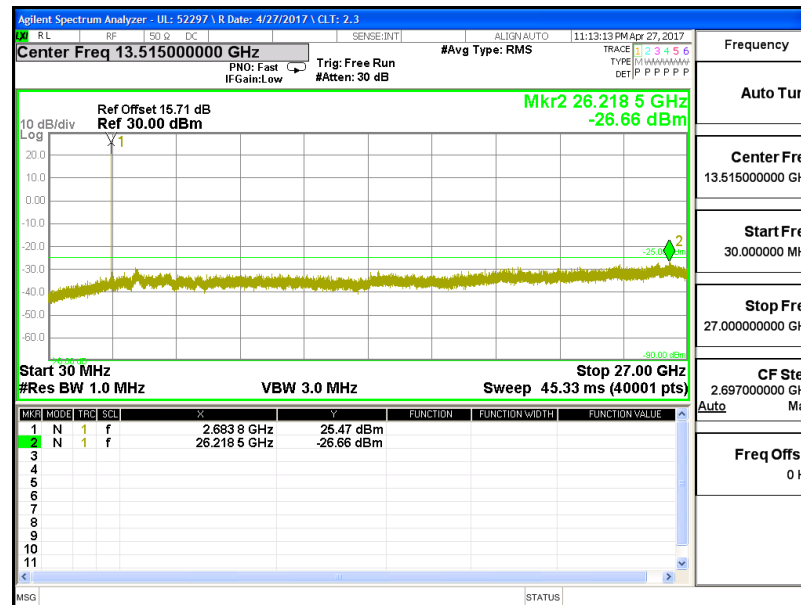




QPSK, (20.0 MHz+ 20.0 MHz BAND WIDTH)

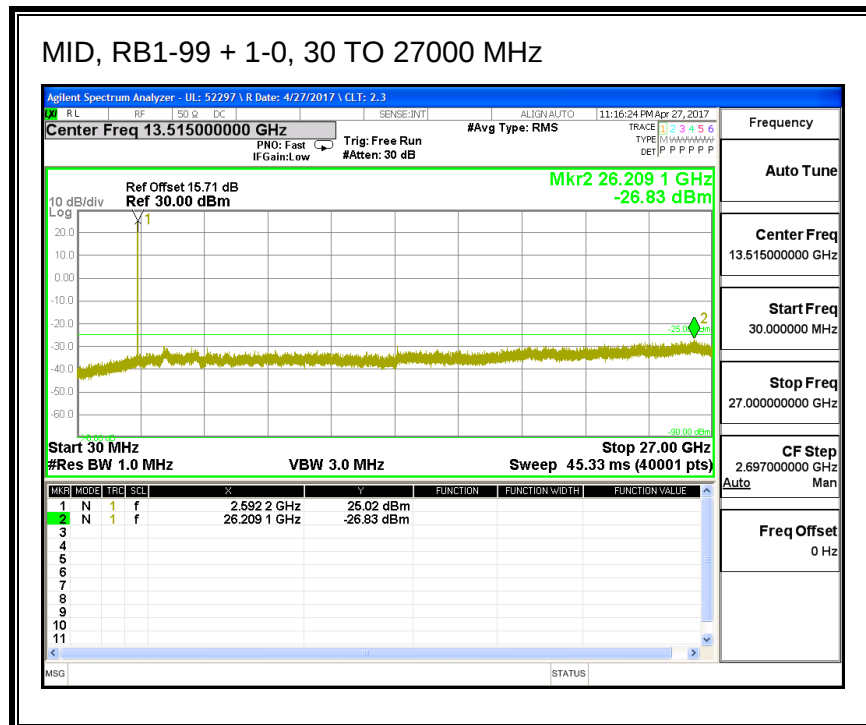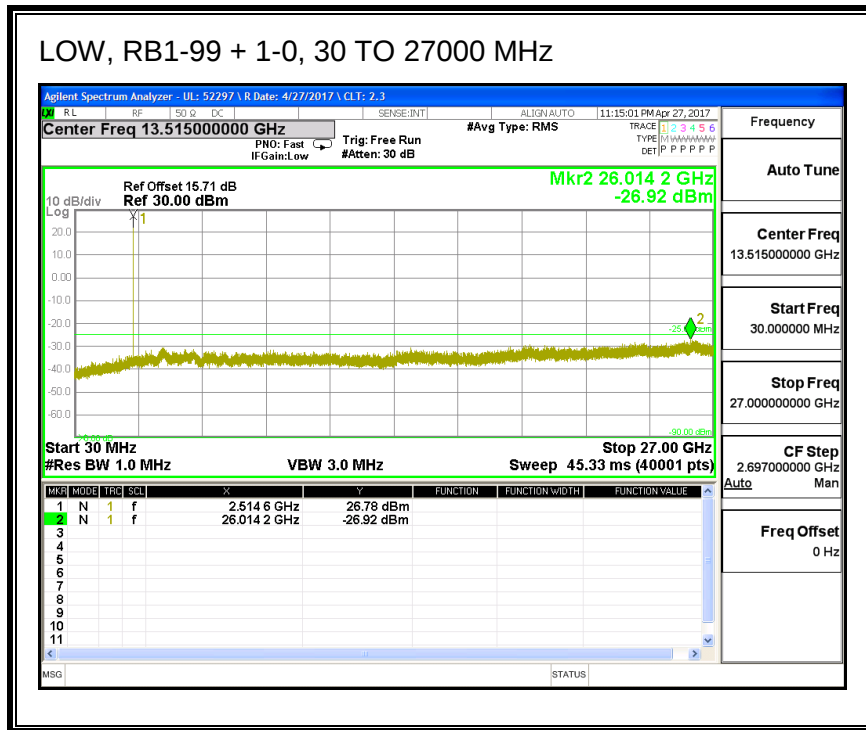

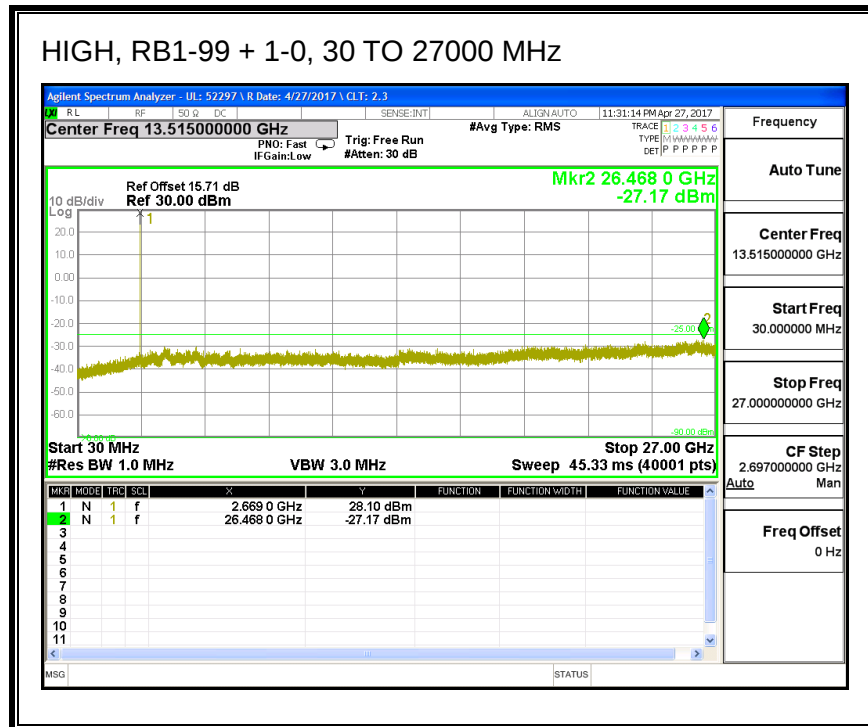

16QAM, (20.0 MHz+ 20.0 MHz BAND WIDTH)

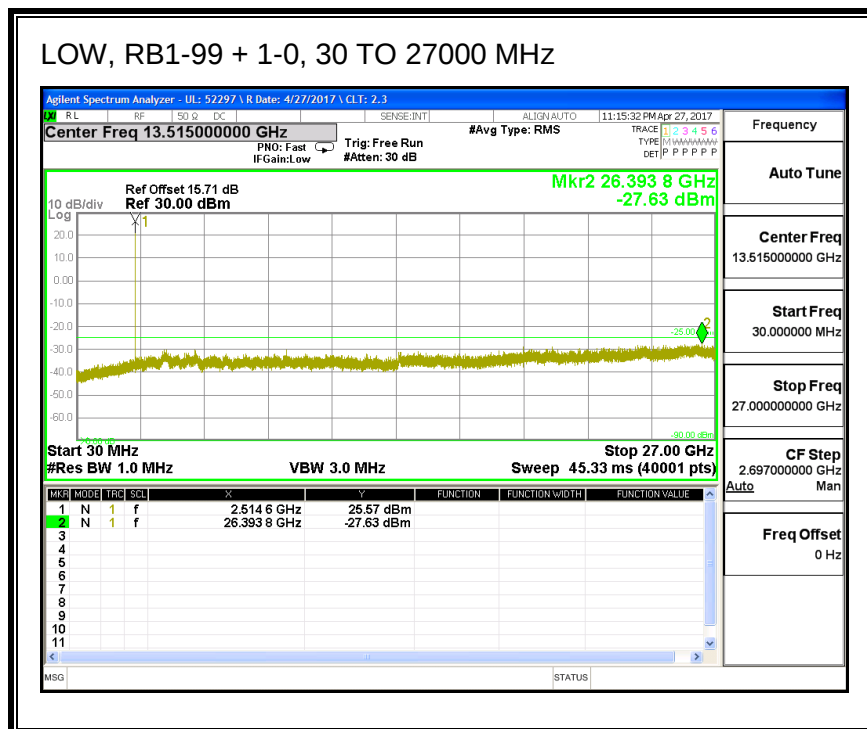

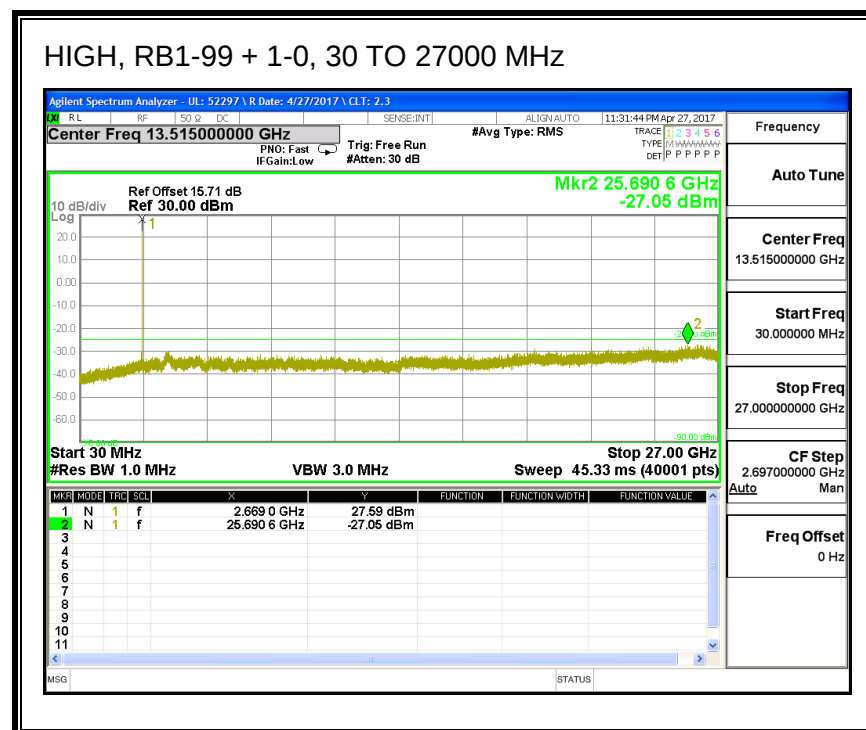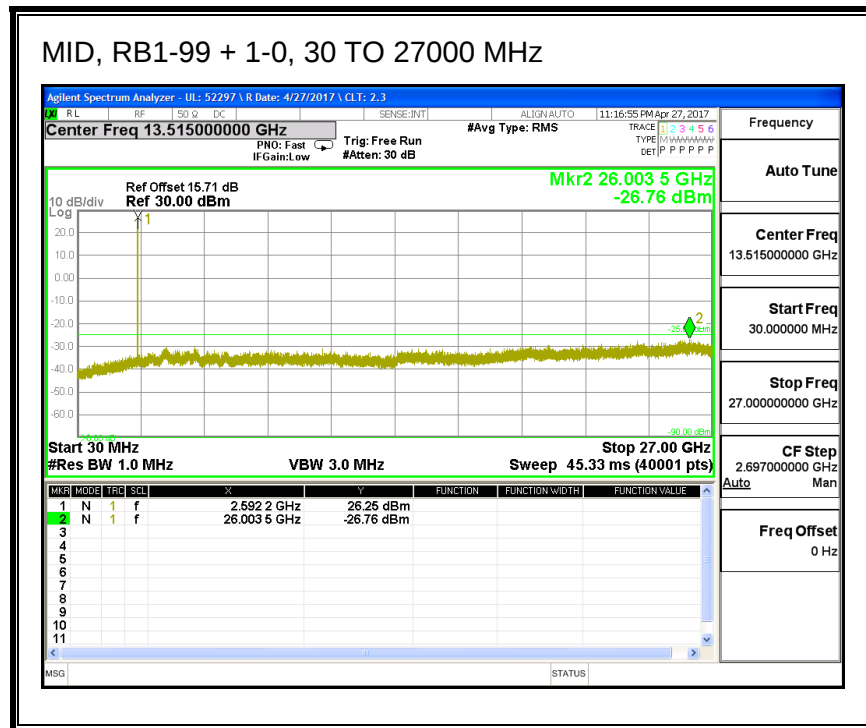

9. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §27.54

LIMITS

§27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to +50°C
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

See the following pages.

9.1. LTE BAND 7

ID:	38602	Date:	4/26/17
------------	-------	--------------	---------

QPSK, (20MHz + 10MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2501.1070	2568.9185		
Extreme (50C)		2501.1070	2568.9185	39.1	0.015
Extreme (40C)		2501.1070	2568.9185	37.9	0.015
Extreme (30C)		2501.1070	2568.9185	33.6	0.013
Extreme (10C)		2501.1070	2568.9185	32.0	0.013
Extreme (0C)		2501.1070	2568.9185	21.5	0.008
Extreme (-10C)		2501.1070	2568.9185	-15.5	-0.006
Extreme (-20C)		2501.1070	2568.9185	-20.6	-0.008
Extreme (-30C)		2501.1070	2568.9185	-23.7	-0.009
20C	15%	2501.1070	2568.9185	31.8	0.013
	-15%	2501.1070	2568.9185	29.7	0.012
	End Point	2501.1070	2568.9185	32.4	0.013

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2501.1353	256.8928		
Extreme (50C)		2501.1353	256.8928	48.5	0.019
Extreme (40C)		2501.1353	256.8928	37.8	0.015
Extreme (30C)		2501.1353	256.8928	31.3	0.012
Extreme (10C)		2501.1353	256.8928	36.3	0.014
Extreme (0C)		2501.1353	256.8928	-47.2	-0.019
Extreme (-10C)		2501.1352	256.8927	-62.9	-0.025
Extreme (-20C)		2501.1352	256.8927	-90.2	-0.036
Extreme (-30C)		2501.1352	256.8927	-103.4	-0.041
20C	15%	2501.1353	256.8928	-48.5	-0.019
	-15%	2501.1353	256.8928	-34.9	-0.014
	End Point	2501.1353	256.8928	-30.5	-0.012

9.2. LTE BAND 41

ID:	38602	Date:	4/26/17
------------	-------	--------------	---------

QPSK, (20MHz + 5MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2497.0076	2689.0967		
Extreme (50C)		2497.0076	2689.0967	-24.1	-0.009
Extreme (40C)		2497.0076	2689.0967	-25.5	-0.010
Extreme (30C)		2497.0076	2689.0967	-31.4	-0.012
Extreme (10C)		2497.0076	2689.0967	-35.2	-0.014
Extreme (0C)		2497.0076	2689.0967	-37.1	-0.014
Extreme (-10C)		2497.0076	2689.0967	-34.5	-0.013
Extreme (-20C)		2497.0076	2689.0967	-41.2	-0.016
Extreme (-30C)		2497.0076	2689.0967	-38.4	-0.015
20C	15%	2497.0076	2689.0967	-30.1	-0.012
	-15%	2497.0076	2689.0967	-28.8	-0.011
	End Point	2497.0076	2689.0967	-27.6	-0.011

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2496.3748	2688.9223		
Extreme (50C)		2496.3748	2688.9223	49.8	0.019
Extreme (40C)		2496.3748	2688.9223	37.4	0.014
Extreme (30C)		2496.3748	2688.9223	34.5	0.013
Extreme (10C)		2496.3748	2688.9223	35.5	0.014
Extreme (0C)		2496.3748	2688.9223	37.1	0.014
Extreme (-10C)		2496.3748	2688.9223	-25.2	-0.010
Extreme (-20C)		2496.3748	2688.9223	-39.4	-0.015
Extreme (-30C)		2496.3749	2688.9224	55.2	0.021
20C	15%	2496.3748	2688.9223	30.1	0.012
	-15%	2496.3748	2688.9223	32.6	0.013
	End Point	2496.3748	2688.9223	35.7	0.014

10. PEAK-TO-AVERAGE RATIO

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

RESULT

Test was performed on LAT 1 antenna; full resource block (FRB) for each bandwidth combination was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average ratio criteria.

10.1.1. LTE BAND 7

ID:	52297	Date:	4/26/17
-----	-------	-------	---------

Mode	Channel Band-	PCC f (MHz)	SCC1 f (MHz)	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio
					Peak	Average	
LTE Band 7	10MHz / 20MHz	2525.6	2540.0	QPSK	29.89	21.87	8.02
				16QAM	29.84	20.86	8.98
	15 MHz / 15MHz	2527.5	2542.5	QPSK	29.77	21.81	7.96
				16QAM	29.77	20.85	8.92
	15MHz / 20MHz	2525.3	2542.4	QPSK	29.64	21.81	7.83
				16QAM	29.73	20.82	8.91
	20MHz / 10MHz	2530.1	2544.5	QPSK	29.79	21.83	7.96
				16QAM	29.79	20.88	8.91
	20MHz / 15MHz	2527.6	2544.7	QPSK	29.65	21.79	7.86
				16QAM	29.63	20.81	8.82
	20MHz / 20MHz	2525.1	2544.9	QPSK	29.49	21.77	7.72
				16QAM	29.49	20.8	8.69
Duty Cycle Correction Factor			0				
Peak to Average Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor							

10.1.2. LTE BAND 41

ID:	52297	Date:	4/26/17
------------	-------	--------------	---------

Mode	Channel Band-	PCC f (MHz)	SCC1 f (MHz)	Modulation	Conducted Power (dBm)		Peak-to-
					Peak	Average	Average Ratio
LTE Band 41 (FCC)	5MHz / 20MHz	2583.8	2595.5	QPSK	30.10	14.96	8.16
				16QAM	29.53	13.97	8.58
	10MHz / 20MHz	2583.6	2598.0	QPSK	29.99	14.94	8.07
				16QAM	29.72	13.94	8.80
	15MHz / 15MHz	2585.5	2600.5	QPSK	30.44	14.93	8.53
				16QAM	30.02	13.93	9.11
	15MHz / 20MHz	2583.3	2600.4	QPSK	29.81	14.92	7.91
				16QAM	29.52	13.94	8.60
	20MHz / 5MHz	2590.5	2602.2	QPSK	30.01	14.98	8.05
				16QAM	29.69	13.99	8.72
	20MHz / 10MHz	2588.1	2602.5	QPSK	29.99	14.94	8.07
				16QAM	29.49	14	8.51
	20MHz / 15MHz	2585.6	2602.7	QPSK	29.59	14.92	7.69
				16QAM	29.48	13.93	8.57
	20MHz / 20MHz	2583.1	2602.9	QPSK	29.93	14.92	8.03
				16QAM	29.40	13.92	8.50
Duty Cycle Correction Factor			6.98				
Peak to Average Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor							

11. RADIATED TEST RESULTS

11.1. FIELD STRENGTH OF SPURIOUS RADIATION, LAT 1

RULE PART(S)

FCC: §2.1053, §27.53

LIMIT

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(P)$, dB; and

b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

11.1.1. LTE BAND 7

QPSK LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/04/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, QPSK UL CA 20/10

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+2524.4MHz 1-99 1-0										
5.03	-65.4	H	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.55	-66.8	H	3.0	-8.9	37.7	1.0	-45.7	-25.0	-20.7	
10.07	-67.5	H	3.0	-6.7	36.2	1.0	-41.8	-25.0	-16.8	
5.03	-65.0	V	3.0	-12.4	38.7	1.0	-50.1	-25.0	-25.1	
7.55	-66.3	V	3.0	-8.7	37.7	1.0	-45.4	-25.0	-20.4	
10.07	-67.6	V	3.0	-6.7	36.2	1.0	-41.9	-25.0	-16.9	
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0										
5.07	-65.2	H	3.0	-12.2	38.7	1.0	-49.9	-25.0	-24.9	
7.61	-66.3	H	3.0	-8.4	37.7	1.0	-45.1	-25.0	-20.1	
10.15	-66.9	H	3.0	-5.9	36.2	1.0	-41.2	-25.0	-16.2	
5.07	-65.4	V	3.0	-12.6	38.7	1.0	-50.3	-25.0	-25.3	
7.61	-66.8	V	3.0	-9.1	37.7	1.0	-45.8	-25.0	-20.8	
10.15	-67.8	V	3.0	-6.8	36.2	1.0	-42.0	-25.0	-17.0	
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0										
5.11	-65.4	H	3.0	-12.3	38.7	1.0	-50.0	-25.0	-25.0	
7.67	-66.6	H	3.0	-8.6	37.6	1.0	-45.3	-25.0	-20.3	
10.23	-67.4	H	3.0	-6.4	36.3	1.0	-41.7	-25.0	-16.7	
5.11	-65.5	V	3.0	-12.7	38.7	1.0	-50.4	-25.0	-25.4	
7.67	-66.4	V	3.0	-8.6	37.6	1.0	-45.2	-25.0	-20.2	
10.23	-67.3	V	3.0	-6.3	36.3	1.0	-41.6	-25.0	-16.6	

Rev. 05.21.15

16QAM LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/04/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, 16QAM UL CA 20/10

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+2524.4MHz 1-99 1-0										
5.03	-65.2	H	3.0	-12.3	38.7	1.0	-50.0	-25.0	-25.0	
7.55	-66.7	H	3.0	-8.8	37.7	1.0	-45.5	-25.0	-20.5	
10.07	-67.2	H	3.0	-6.4	36.2	1.0	-41.5	-25.0	-16.5	
5.03	-65.1	V	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.55	-66.6	V	3.0	-8.9	37.7	1.0	-45.6	-25.0	-20.6	
10.07	-67.3	V	3.0	-6.5	36.2	1.0	-41.7	-25.0	-16.7	
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0										
5.07	-65.3	H	3.0	-12.3	38.7	1.0	-50.0	-25.0	-25.0	
7.61	-66.4	H	3.0	-8.5	37.7	1.0	-45.2	-25.0	-20.2	
10.15	-66.7	H	3.0	-5.8	36.2	1.0	-41.0	-25.0	-16.0	
5.07	-65.4	V	3.0	-12.7	38.7	1.0	-50.4	-25.0	-25.4	
7.61	-66.7	V	3.0	-9.0	37.7	1.0	-45.7	-25.0	-20.7	
10.15	-67.6	V	3.0	-6.6	36.2	1.0	-41.8	-25.0	-16.8	
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0										
5.11	-65.2	H	3.0	-12.1	38.7	1.0	-49.8	-25.0	-24.8	
7.67	-66.5	H	3.0	-8.5	37.6	1.0	-45.1	-25.0	-20.1	
10.23	-67.6	H	3.0	-6.6	36.3	1.0	-41.8	-25.0	-16.8	
5.11	-65.3	V	3.0	-12.6	38.7	1.0	-50.2	-25.0	-25.2	
7.67	-66.5	V	3.0	-8.7	37.6	1.0	-45.3	-25.0	-20.3	
10.23	-67.4	V	3.0	-6.4	36.3	1.0	-41.7	-25.0	-16.7	

Rev. 05.21.15

QPSK LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 05/04/17 Test Engineer: 39004 Configuration: EUT Only Mode: LTE Band 7, QPSK UL CA 20/20										
Test Equipment: Substitution: Horn T344 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B7				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-64.5	H	3.0	-16.4	36.1	1.0	-51.5	-25.0	-26.5	
7.56	-66.2	H	3.0	-16.4	36.3	1.0	-51.7	-25.0	-26.7	
10.08	-67.7	H	3.0	-12.3	33.4	1.0	-44.7	-25.0	-19.7	
5.04	-65.2	V	3.0	-15.7	36.3	1.0	-50.9	-25.0	-25.9	
7.56	-67.1	V	3.0	-13.5	34.8	1.0	-47.3	-25.0	-22.3	
10.08	-67.4	V	3.0	-11.5	32.1	1.0	-42.5	-25.0	-17.5	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.05	-64.6	H	3.0	-13.6	36.0	1.0	-48.5	-25.0	-23.5	
7.63	-66.5	H	3.0	-13.5	35.2	1.0	-47.7	-25.0	-22.7	
10.18	-67.7	H	3.0	-11.4	32.0	1.0	-42.4	-25.0	-17.4	
5.05	-64.3	V	3.0	-16.7	36.1	1.0	-51.8	-25.0	-26.8	
7.63	-66.9	V	3.0	-9.1	37.7	1.0	-45.8	-25.0	-20.8	
10.18	-67.4	V	3.0	-6.4	36.2	1.0	-41.6	-25.0	-16.6	
High Channel (2540.2MHz)+2560MHz 1-99 1-0										
5.10	-64.4	H	3.0	-15.3	36.2	1.0	-50.5	-25.0	-25.5	
7.65	-66.8	H	3.0	-16.1	36.0	1.0	-51.2	-25.0	-26.2	
10.20	-67.5	H	3.0	-11.2	32.0	1.0	-42.3	-25.0	-17.3	
5.10	-65.1	V	3.0	-18.0	36.3	1.0	-53.3	-25.0	-28.3	
7.65	-66.7	V	3.0	-15.4	35.8	1.0	-50.2	-25.0	-25.2	
10.20	-67.2	V	3.0	-6.2	36.3	1.0	-41.4	-25.0	-16.4	
Rev. 05.21.15										

16QAM LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/04/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, 16QAM UL CA 20/20

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-64.6	H	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.56	-66.7	H	3.0	-8.9	37.7	1.0	-45.6	-25.0	-20.6	
10.08	-67.3	H	3.0	-6.4	36.2	1.0	-41.6	-25.0	-16.6	
5.04	-65.1	V	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.56	-66.8	V	3.0	-9.2	37.7	1.0	-45.9	-25.0	-20.9	
10.08	-67.3	V	3.0	-6.5	36.2	1.0	-41.7	-25.0	-16.7	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.05	-64.4	H	3.0	-11.5	38.7	1.0	-49.2	-25.0	-24.2	
7.63	-66.5	H	3.0	-8.5	37.7	1.0	-45.2	-25.0	-20.2	
10.18	-67.6	H	3.0	-6.6	36.2	1.0	-41.9	-25.0	-16.9	
5.05	-64.6	V	3.0	-11.9	38.7	1.0	-49.6	-25.0	-24.6	
7.63	-66.8	V	3.0	-9.1	37.7	1.0	-45.8	-25.0	-20.8	
10.18	-67.3	V	3.0	-6.3	36.2	1.0	-41.5	-25.0	-16.5	
High Channel (2540.2MHz)+2560MHz 1-99 1-0										
5.10	-64.4	H	3.0	-11.4	38.7	1.0	-49.0	-25.0	-24.0	
7.65	-66.8	H	3.0	-8.8	37.7	1.0	-45.5	-25.0	-20.5	
10.20	-67.5	H	3.0	-6.5	36.3	1.0	-41.7	-25.0	-16.7	
5.10	-65.1	V	3.0	-12.4	38.7	1.0	-50.0	-25.0	-25.0	
7.65	-66.7	V	3.0	-8.9	37.7	1.0	-45.6	-25.0	-20.6	
10.20	-67.3	V	3.0	-6.3	36.3	1.0	-41.5	-25.0	-16.5	

Rev. 05.21.15

11.1.2. LTE BAND 41

QPSK LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/04/17
Test Engineer: 31300
Configuration: EUT Only
Mode: LTE Band 41, QPSK UL CA 20/5

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamplifier	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) +2517.7MHz 1-99, 1-0										
4.05	-70.3	H	3.0	-19.5	38.7	1.0	-57.2	-25.0	-32.2	
6.65	-72.4	H	3.0	-16.0	38.2	1.0	-53.2	-25.0	-28.2	
9.23	-72.5	H	3.0	-12.7	36.6	1.0	-48.3	-25.0	-23.3	
4.07	-70.1	V	3.0	-19.2	38.7	1.0	-56.9	-25.0	-31.9	
6.70	-72.7	V	3.0	-16.4	38.2	1.0	-53.6	-25.0	-28.6	
9.30	-72.7	V	3.0	-12.8	36.6	1.0	-48.4	-25.0	-23.4	
Mid Channel (2590.5MHz)+2602.2MHz 1-99, 1-0										
6.05	-71.4	H	3.0	-16.3	38.4	1.0	-53.7	-25.0	-28.7	
7.65	-71.3	H	3.0	-13.4	37.7	1.0	-50.0	-25.0	-25.0	
11.25	-73.2	H	3.0	-11.4	36.9	1.0	-47.3	-25.0	-22.3	
6.04	-70.7	V	3.0	-15.9	38.4	1.0	-53.3	-25.0	-28.3	
7.63	-71.8	V	3.0	-14.1	37.7	1.0	-50.7	-25.0	-25.7	
11.05	-71.5	V	3.0	-9.6	36.8	1.0	-45.4	-25.0	-20.4	
High Channel (2675MHz)+2686.7MHz 1-99, 1-0										
4.76	-70.2	H	3.0	-17.9	38.7	1.0	-55.6	-25.0	-30.6	
7.84	-72.7	H	3.0	-14.5	37.5	1.0	-51.1	-25.0	-26.1	
10.13	-72.2	H	3.0	-11.3	36.2	1.0	-46.5	-25.0	-21.5	
4.80	-71.3	V	3.0	-19.1	38.7	1.0	-56.8	-25.0	-31.8	
7.73	-71.8	V	3.0	-13.9	37.6	1.0	-50.5	-25.0	-25.5	
10.20	-71.7	V	3.0	-10.8	36.3	1.0	-46.0	-25.0	-21.0	

Rev. 05.21.15

16QAM LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 05/04/17 Test Engineer: 31300 Configuration: EUT Only Mode: LTE Band 41, 16QAM UL CA 20/5										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B41				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz)+2517.7MHz 1-99, 1-0										
4.05	-70.4	H	3.0	-19.6	38.7	1.0	-57.3	-25.0	-32.3	
6.65	-72.0	H	3.0	-15.6	38.2	1.0	-52.8	-25.0	-27.8	
9.23	-72.5	H	3.0	-12.6	36.6	1.0	-48.3	-25.0	-23.3	
4.07	-69.9	V	3.0	-19.0	38.7	1.0	-56.7	-25.0	-31.7	
6.70	-71.8	V	3.0	-15.5	38.2	1.0	-52.7	-25.0	-27.7	
9.30	-72.1	V	3.0	-12.3	36.6	1.0	-47.8	-25.0	-22.8	
Mid Channel (2590.5MHz)+2602.2MHz 1-99, 1-0										
6.05	-71.6	H	3.0	-16.5	38.4	1.0	-53.9	-25.0	-28.9	
7.65	-71.7	H	3.0	-13.8	37.7	1.0	-50.4	-25.0	-25.4	
11.25	-72.7	H	3.0	-10.8	36.9	1.0	-46.7	-25.0	-21.7	
6.04	-70.9	V	3.0	-16.1	38.4	1.0	-53.5	-25.0	-28.5	
7.63	-72.0	V	3.0	-14.2	37.7	1.0	-50.9	-25.0	-25.9	
11.05	-71.9	V	3.0	-10.0	36.8	1.0	-45.8	-25.0	-20.8	
High Channel (2675MHz)+2686.7MHz 1-99, 1-0										
4.76	-70.3	H	3.0	-18.0	38.7	1.0	-55.7	-25.0	-30.7	
7.84	-72.1	H	3.0	-13.8	37.5	1.0	-50.4	-25.0	-25.4	
10.13	-72.7	H	3.0	-11.8	36.2	1.0	-47.0	-25.0	-22.0	
7.75	-71.7	V	3.0	-13.8	37.6	1.0	-50.4	-25.0	-25.4	
7.73	-72.1	V	3.0	-14.2	37.6	1.0	-50.8	-25.0	-25.8	
10.20	-71.6	V	3.0	-10.6	36.3	1.0	-45.8	-25.0	-20.8	
Rev. 05.21.15										

QPSK LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 05/04/17 Test Engineer: 31300 Configuration: EUT Only Mode: LTE Band 41, QPSK UL CA 20/20										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B41				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0										
4.87	-69.2	H	3.0	-16.6	38.7	1.0	-54.3	-25.0	-29.3	
7.68	-71.5	H	3.0	-13.5	37.6	1.0	-50.2	-25.0	-25.2	
10.25	-71.8	H	3.0	-10.8	36.3	1.0	-46.0	-25.0	-21.0	
4.90	-69.7	V	3.0	-17.3	38.7	1.0	-55.0	-25.0	-30.0	
7.69	-71.7	V	3.0	-13.9	37.6	1.0	-50.5	-25.0	-25.5	
10.30	-71.8	V	3.0	-10.7	36.3	1.0	-46.0	-25.0	-21.0	
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0										
5.15	-69.7	H	3.0	-16.6	38.7	1.0	-54.2	-25.0	-29.2	
7.75	-71.6	H	3.0	-13.5	37.6	1.0	-50.1	-25.0	-25.1	
10.33	-71.9	H	3.0	-10.8	36.3	1.0	-46.1	-25.0	-21.1	
5.20	-70.6	V	3.0	-17.7	38.7	1.0	-55.4	-25.0	-30.4	
7.76	-71.2	V	3.0	-13.3	37.6	1.0	-49.9	-25.0	-24.9	
10.33	-72.1	V	3.0	-11.0	36.3	1.0	-46.3	-25.0	-21.3	
High Channel (2660.2MHz) + 2680MHz 1-99 1-0										
5.50	-70.3	H	3.0	-16.4	38.6	1.0	-54.0	-25.0	-29.0	
7.73	-70.7	H	3.0	-12.7	37.6	1.0	-49.3	-25.0	-24.3	
10.70	-71.6	H	3.0	-10.2	36.6	1.0	-45.7	-25.0	-20.7	
5.60	-70.1	V	3.0	-16.2	38.6	1.0	-53.8	-25.0	-28.8	
7.73	-71.4	V	3.0	-13.6	37.6	1.0	-50.2	-25.0	-25.2	
10.70	-71.2	V	3.0	-9.7	36.6	1.0	-45.3	-25.0	-20.3	
Rev. 05.21.15										

16QAM LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/04/17
Test Engineer: 31300
Configuration: EUT Only
Mode: LTE Band 41, 16QAM UL CA 20/20

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
3m Chamber E

Pre-amplifier
3m Chamber E

Filter
Filter

Limit
LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0										
4.87	-70.1	H	3.0	-17.5	38.7	1.0	-55.2	-25.0	-30.2	
7.68	-71.7	H	3.0	-13.7	37.6	1.0	-50.3	-25.0	-25.3	
10.25	-71.8	H	3.0	-10.8	36.3	1.0	-46.1	-25.0	-21.1	
4.90	-69.7	V	3.0	-17.3	38.7	1.0	-55.0	-25.0	-30.0	
7.69	-71.5	V	3.0	-13.7	37.6	1.0	-50.3	-25.0	-25.3	
10.30	-72.0	V	3.0	-10.9	36.3	1.0	-46.2	-25.0	-21.2	
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0										
5.15	-69.7	H	3.0	-16.5	38.7	1.0	-54.2	-25.0	-29.2	
7.75	-71.4	H	3.0	-13.3	37.6	1.0	-49.9	-25.0	-24.9	
10.33	-71.2	H	3.0	-10.2	36.3	1.0	-45.5	-25.0	-20.5	
5.20	-70.4	V	3.0	-17.5	38.7	1.0	-55.1	-25.0	-30.1	
7.76	-71.3	V	3.0	-13.4	37.6	1.0	-50.0	-25.0	-25.0	
10.33	-72.2	V	3.0	-11.0	36.3	1.0	-46.4	-25.0	-21.4	
High Channel (2660.2MHz) + 2680MHz 1-99 1-0										
5.50	-70.7	H	3.0	-16.8	38.6	1.0	-54.4	-25.0	-29.4	
7.73	-70.7	H	3.0	-12.6	37.6	1.0	-49.2	-25.0	-24.2	
10.70	-71.9	H	3.0	-10.5	36.6	1.0	-46.1	-25.0	-21.1	
5.60	-70.8	V	3.0	-17.0	38.6	1.0	-54.5	-25.0	-29.5	
7.73	-71.9	V	3.0	-14.0	37.6	1.0	-50.7	-25.0	-25.7	
10.70	-72.0	V	3.0	-10.4	36.6	1.0	-46.0	-25.0	-21.0	

Rev. 05.21.15

11.2. FIELD STRENGTH OF SPURIOUS RADIATION, UAT 1

11.2.1. LTE BAND 7

QPSK LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/05/17
Test Engineer: 10641
Configuration: EUT Only
Mode: LTE Band 7, QPSK UL CA 20/10

Test Equipment:
Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+2524.4MHz 1-99 1-0										
5.03	-66.2	H	3.0	-13.3	38.7	1.0	-50.9	-25.0	-25.9	
7.55	-67.3	H	3.0	-9.5	37.7	1.0	-46.2	-25.0	-21.2	
10.07	-67.0	H	3.0	-6.1	36.2	1.0	-41.3	-25.0	-16.3	
5.03	-65.1	V	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.55	-66.6	V	3.0	-9.0	37.7	1.0	-45.7	-25.0	-20.7	
10.07	-67.3	V	3.0	-6.5	36.2	1.0	-41.7	-25.0	-16.7	
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0										
5.07	-64.9	H	3.0	-11.9	38.7	1.0	-49.6	-25.0	-24.6	
7.61	-66.2	H	3.0	-8.3	37.7	1.0	-45.0	-25.0	-20.0	
10.15	-67.0	H	3.0	-6.1	36.2	1.0	-41.3	-25.0	-16.3	
5.07	-65.2	V	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.61	-66.9	V	3.0	-9.2	37.7	1.0	-45.9	-25.0	-20.9	
10.15	-67.7	V	3.0	-6.8	36.2	1.0	-42.0	-25.0	-17.0	
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0										
5.11	-65.5	H	3.0	-12.4	38.7	1.0	-50.0	-25.0	-25.0	
7.67	-66.6	H	3.0	-8.6	37.6	1.0	-45.3	-25.0	-20.3	
10.23	-67.9	H	3.0	-6.9	36.3	1.0	-42.2	-25.0	-17.2	
5.11	-64.3	V	3.0	-11.5	38.7	1.0	-49.2	-25.0	-24.2	
7.67	-66.8	V	3.0	-8.9	37.6	1.0	-45.6	-25.0	-20.6	
10.23	-67.6	V	3.0	-6.5	36.3	1.0	-41.8	-25.0	-16.8	

Rev. 05.21.15

16QAM LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 05/05/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 7, 16QAM UL CA 20/10											
Test Equipment: Substitution: Horn T344 Substitution, and 8ft SMA Cable											
Chamber		Pre-amplifier		Filter		Limit					
3m Chamber E		3m Chamber E		Filter		LTE B7					
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (2510MHz)+2524.4MHz 1-99 1-0											
5.03	-66.2	H	3.0	-13.3	38.7	1.0	-51.0	-25.0	-26.0		
7.55	-66.0	H	3.0	-8.2	37.7	1.0	-44.9	-25.0	-19.9		
10.07	-67.8	H	3.0	-7.0	36.2	1.0	-42.2	-25.0	-17.2		
5.03	-64.6	V	3.0	-12.0	38.7	1.0	-49.7	-25.0	-24.7		
7.55	-67.7	V	3.0	-10.1	37.7	1.0	-46.8	-25.0	-21.8		
10.07	-67.8	V	3.0	-7.0	36.2	1.0	-42.1	-25.0	-17.1		
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0											
5.07	-65.3	H	3.0	-12.3	38.7	1.0	-50.0	-25.0	-25.0		
7.61	-66.6	H	3.0	-8.6	37.7	1.0	-45.3	-25.0	-20.3		
10.15	-67.5	H	3.0	-6.5	36.2	1.0	-41.8	-25.0	-16.8		
5.07	-65.6	V	3.0	-12.9	38.7	1.0	-50.6	-25.0	-25.6		
7.61	-67.5	V	3.0	-9.8	37.7	1.0	-46.5	-25.0	-21.5		
10.15	-65.9	V	3.0	-5.0	36.2	1.0	-40.2	-25.0	-15.2		
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0											
5.11	-65.0	H	3.0	-11.9	38.7	1.0	-49.6	-25.0	-24.6		
7.67	-67.4	H	3.0	-9.4	37.6	1.0	-46.0	-25.0	-21.0		
10.23	-68.8	H	3.0	-7.8	36.3	1.0	-43.1	-25.0	-18.1		
5.11	-64.7	V	3.0	-11.9	38.7	1.0	-49.6	-25.0	-24.6		
7.67	-66.9	V	3.0	-9.1	37.6	1.0	-45.7	-25.0	-20.7		
10.23	-67.7	V	3.0	-6.7	36.3	1.0	-42.0	-25.0	-17.0		
Rev. 05.21.15											

QPSK LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/05/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, QPSK UL CA 20/20

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-64.6	H	3.0	-16.5	36.1	1.0	-51.6	-25.0	-26.6	
7.56	-66.4	H	3.0	-16.7	36.3	1.0	-52.0	-25.0	-27.0	
10.08	-67.0	H	3.0	-11.6	33.4	1.0	-44.0	-25.0	-19.0	
5.04	-64.3	V	3.0	-14.7	36.3	1.0	-50.0	-25.0	-25.0	
7.56	-66.5	V	3.0	-13.0	34.8	1.0	-46.7	-25.0	-21.7	
10.08	-66.0	V	3.0	-10.0	32.1	1.0	-41.1	-25.0	-16.1	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.07	-63.9	H	3.0	-12.9	36.0	1.0	-47.8	-25.0	-22.8	
7.61	-66.1	H	3.0	-13.1	35.2	1.0	-47.3	-25.0	-22.3	
10.14	-66.4	H	3.0	-10.1	32.0	1.0	-41.2	-25.0	-16.2	
5.07	-63.9	V	3.0	-16.2	36.1	1.0	-51.3	-25.0	-26.3	
7.61	-67.6	V	3.0	-9.9	37.7	1.0	-46.6	-25.0	-21.6	
10.14	-68.4	V	3.0	-7.4	36.2	1.0	-42.7	-25.0	-17.7	
High Channel (2540.2MHz)+2560MHz 1-99 1-0										
5.10	-65.0	H	3.0	-15.9	36.2	1.0	-51.1	-25.0	-26.1	
7.65	-67.3	H	3.0	-16.6	36.0	1.0	-51.7	-25.0	-26.7	
10.20	-67.8	H	3.0	-11.5	32.0	1.0	-42.5	-25.0	-17.5	
5.10	-65.5	V	3.0	-18.4	36.3	1.0	-53.7	-25.0	-28.7	
7.65	-66.6	V	3.0	-15.4	35.8	1.0	-50.2	-25.0	-25.2	
10.20	-68.0	V	3.0	-7.0	36.3	1.0	-42.2	-25.0	-17.2	

Rev. 05.21.15

16QAM LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #:

Date: 05/05/17

Test Engineer: 10641

Configuration: EUT Only

Mode: LTE Band 7, 16QAM UL CA 20/20

Test Equipment:

Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber
3m Chamber E

Pre-amplifier
3m Chamber E

Filter
Filter

Limit
LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-63.7	H	3.0	-10.7	38.7	1.0	-48.4	-25.0	-23.4	
7.56	-67.3	H	3.0	-9.4	37.7	1.0	-46.1	-25.0	-21.1	
10.08	-67.8	H	3.0	-7.0	36.2	1.0	-42.1	-25.0	-17.1	
5.04	-64.7	V	3.0	-12.0	38.7	1.0	-49.7	-25.0	-24.7	
7.56	-67.0	V	3.0	-9.4	37.7	1.0	-46.1	-25.0	-21.1	
10.08	-67.9	V	3.0	-7.0	36.2	1.0	-42.2	-25.0	-17.2	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.07	-65.5	H	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.61	-66.3	H	3.0	-8.4	37.7	1.0	-45.1	-25.0	-20.1	
10.14	-67.5	H	3.0	-6.6	36.2	1.0	-41.8	-25.0	-16.8	
5.07	-65.6	V	3.0	-12.9	38.7	1.0	-50.6	-25.0	-25.6	
7.61	-67.3	V	3.0	-9.6	37.7	1.0	-46.2	-25.0	-21.2	
10.14	-67.7	V	3.0	-6.7	36.2	1.0	-42.0	-25.0	-17.0	
High Channel (2540.2MHz)+2560MHz 1-99 1-0										
5.10	-64.1	H	3.0	-11.0	38.7	1.0	-48.7	-25.0	-23.7	
7.65	-66.9	H	3.0	-8.9	37.7	1.0	-45.5	-25.0	-20.5	
10.20	-66.7	H	3.0	-5.8	36.3	1.0	-41.0	-25.0	-16.0	
5.10	-65.0	V	3.0	-12.3	38.7	1.0	-49.9	-25.0	-24.9	
7.65	-66.8	V	3.0	-9.0	37.7	1.0	-45.7	-25.0	-20.7	
10.20	-67.7	V	3.0	-6.7	36.3	1.0	-42.0	-25.0	-17.0	

Rev. 05.21.15

11.2.2. LTE BAND 41

QPSK LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 05/05/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 41, QPSK UL CA 20/5										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber	Pre-amplifier	Filter	Limit							
3m Chamber E	3m Chamber E	Filter	LTE B41							
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) +2517.7MHz 1-99, 1-0										
4.05	-72.7	H	3.0	-21.9	38.7	1.0	-59.6	-25.0	-34.6	
6.65	-72.8	H	3.0	-16.4	38.2	1.0	-53.6	-25.0	-28.6	
9.25	-72.8	H	3.0	-12.9	36.6	1.0	-48.5	-25.0	-23.5	
4.05	-70.9	V	3.0	-20.0	38.7	1.0	-57.7	-25.0	-32.7	
6.65	-73.1	V	3.0	-16.9	38.2	1.0	-54.1	-25.0	-29.1	
9.25	-73.0	V	3.0	-13.2	36.6	1.0	-48.8	-25.0	-23.8	
Mid Channel (2590.5MHz)+2602.2MHz 1-99, 1-0										
6.05	-72.2	H	3.0	-17.1	38.4	1.0	-54.5	-25.0	-29.5	
7.65	-71.4	H	3.0	-13.4	37.7	1.0	-50.1	-25.0	-25.1	
11.25	-73.5	H	3.0	-11.6	36.9	1.0	-47.6	-25.0	-22.6	
6.05	-72.3	V	3.0	-17.4	38.4	1.0	-54.8	-25.0	-29.8	
7.65	-72.2	V	3.0	-14.4	37.7	1.0	-51.1	-25.0	-26.1	
11.30	-72.5	V	3.0	-10.3	36.9	1.0	-46.3	-25.0	-21.3	
High Channel (2675MHz)+2686.7MHz 1-99, 1-0										
5.00	-71.8	H	3.0	-19.0	38.7	1.0	-56.7	-25.0	-31.7	
8.04	-73.1	H	3.0	-14.7	37.4	1.0	-51.1	-25.0	-26.1	
10.72	-72.6	H	3.0	-11.2	36.6	1.0	-46.8	-25.0	-21.8	
5.00	-65.7	V	3.0	-13.2	38.7	1.0	-50.8	-25.0	-25.8	
8.04	-72.5	V	3.0	-14.2	37.4	1.0	-50.6	-25.0	-25.6	
10.72	-72.2	V	3.0	-10.6	36.6	1.0	-46.2	-25.0	-21.2	
Rev. 05.21.15										

16QAM LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 05/05/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 41, 16QAM UL CA 20/5											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber			Pre-amplifier			Filter			Limit		
3m Chamber E			3m Chamber E			Filter			LTE B41		
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (2506MHz) +2517.7MHz 1-99, 1-0											
4.05	-71.4	H	3.0	-20.5	38.7	1.0	-58.3	-25.0	-33.3		
6.65	-72.2	H	3.0	-15.8	38.2	1.0	-53.0	-25.0	-28.0		
9.25	-72.8	H	3.0	-12.9	36.6	1.0	-48.5	-25.0	-23.5		
4.05	-69.8	V	3.0	-19.0	38.7	1.0	-56.7	-25.0	-31.7		
6.65	-70.6	V	3.0	-14.4	38.2	1.0	-51.6	-25.0	-26.6		
9.25	-71.6	V	3.0	-11.8	36.6	1.0	-47.5	-25.0	-22.5		
Mid Channel (2590.5MHz)+2602.2MHz 1-99, 1-0											
6.05	-70.8	H	3.0	-15.6	38.4	1.0	-53.0	-25.0	-28.0		
7.65	-72.0	H	3.0	-14.0	37.7	1.0	-50.7	-25.0	-25.7		
11.25	-72.8	H	3.0	-10.9	36.9	1.0	-46.9	-25.0	-21.9		
6.05	-72.1	V	3.0	-17.2	38.4	1.0	-54.6	-25.0	-29.6		
7.65	-71.3	V	3.0	-13.5	37.7	1.0	-50.2	-25.0	-25.2		
11.25	-71.7	V	3.0	-9.6	36.9	1.0	-45.5	-25.0	-20.5		
High Channel (2675MHz)+2686.7MHz 1-99, 1-0											
4.80	-71.0	H	3.0	-18.6	38.7	1.0	-56.3	-25.0	-31.3		
7.85	-72.4	H	3.0	-14.2	37.5	1.0	-50.8	-25.0	-25.8		
10.20	-72.6	H	3.0	-11.1	36.3	1.0	-46.3	-25.0	-21.3		
4.80	-71.0	V	3.0	-18.8	38.7	1.0	-56.5	-25.0	-31.5		
7.85	-71.1	V	3.0	-13.0	37.5	1.0	-49.6	-25.0	-24.6		
10.20	-71.8	V	3.0	-10.8	36.3	1.0	-46.1	-25.0	-21.1		
Rev. 05.21.15											

QPSK LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 05/05/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 41, QPSK UL CA 20/20											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber		Pre-amplifier		Filter		Limit					
3m Chamber E		3m Chamber E		Filter		LTE B41					
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0											
5.03	-70.0	H	3.0	-17.1	38.7	1.0	-54.8	-25.0	-29.8		
7.55	-71.1	H	3.0	-13.2	37.7	1.0	-49.9	-25.0	-24.9		
10.06	-72.0	H	3.0	-11.1	36.2	1.0	-46.3	-25.0	-21.3		
5.03	-69.6	V	3.0	-16.9	38.7	1.0	-54.6	-25.0	-29.6		
7.55	-70.9	V	3.0	-13.2	37.7	1.0	-49.9	-25.0	-24.9		
10.06	-72.0	V	3.0	-11.2	36.2	1.0	-46.4	-25.0	-21.4		
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0											
5.19	-70.0	H	3.0	-16.7	38.7	1.0	-54.4	-25.0	-29.4		
7.78	-71.7	H	3.0	-13.6	37.6	1.0	-50.1	-25.0	-25.1		
10.37	-71.7	H	3.0	-10.6	36.4	1.0	-45.9	-25.0	-20.9		
5.19	-69.0	V	3.0	-16.0	38.7	1.0	-53.7	-25.0	-28.7		
7.78	-70.5	V	3.0	-12.6	37.6	1.0	-49.2	-25.0	-24.2		
10.37	-70.8	V	3.0	-9.7	36.4	1.0	-45.0	-25.0	-20.0		
High Channel (2660.2MHz) + 2680MHz 1-99 1-0											
5.34	-69.7	H	3.0	-16.1	38.6	1.0	-53.8	-25.0	-28.8		
8.01	-71.3	H	3.0	-12.9	37.4	1.0	-49.3	-25.0	-24.3		
10.68	-71.5	H	3.0	-10.2	36.6	1.0	-45.7	-25.0	-20.7		
5.34	-71.3	V	3.0	-18.1	38.6	1.0	-55.7	-25.0	-30.7		
8.01	-71.3	V	3.0	-13.1	37.4	1.0	-49.5	-25.0	-24.5		
10.68	-71.1	V	3.0	-9.5	36.6	1.0	-45.1	-25.0	-20.1		
Rev. 05.21.15											

16QAM LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/05/17
Test Engineer: 10641
Configuration: EUT Only
Mode: LTE Band 41, 16QAM UL CA 20/20

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0										
5.03	-70.7	H	3.0	-17.7	38.7	1.0	-55.4	-25.0	-30.4	
7.55	-72.5	H	3.0	-14.6	37.7	1.0	-51.4	-25.0	-26.4	
10.06	-72.8	H	3.0	-11.9	36.2	1.0	-47.1	-25.0	-22.1	
5.03	-72.8	V	3.0	-20.2	38.7	1.0	-57.9	-25.0	-32.9	
7.55	-71.0	V	3.0	-13.4	37.7	1.0	-50.1	-25.0	-25.1	
10.06	-72.8	V	3.0	-12.0	36.2	1.0	-47.1	-25.0	-22.1	
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0										
5.19	-71.4	H	3.0	-18.2	38.7	1.0	-55.9	-25.0	-30.9	
7.78	-72.9	H	3.0	-14.8	37.6	1.0	-51.3	-25.0	-26.3	
10.37	-72.0	H	3.0	-10.8	36.4	1.0	-46.2	-25.0	-21.2	
5.19	-72.4	V	3.0	-19.5	38.7	1.0	-57.2	-25.0	-32.2	
7.78	-71.3	V	3.0	-13.3	37.6	1.0	-49.9	-25.0	-24.9	
10.37	-71.3	V	3.0	-10.1	36.4	1.0	-45.5	-25.0	-20.5	
High Channel (2660.2MHz) + 2680MHz 1-99 1-0										
5.34	-70.7	H	3.0	-17.1	38.6	1.0	-54.8	-25.0	-29.8	
8.01	-71.7	H	3.0	-13.2	37.4	1.0	-49.7	-25.0	-24.7	
10.68	-71.4	H	3.0	-10.0	36.6	1.0	-45.6	-25.0	-20.6	
5.34	-71.6	V	3.0	-18.3	38.6	1.0	-55.9	-25.0	-30.9	
8.01	-72.6	V	3.0	-14.4	37.4	1.0	-50.8	-25.0	-25.8	
10.68	-71.8	V	3.0	-10.3	36.6	1.0	-45.9	-25.0	-20.9	

Rev. 05.21.15