



# **CERTIFICATION TEST REPORT**

**Report Number. : 11792114-E3V2**

**Applicant :** APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**Model :** A1865, A1903

**FCC ID :** BCG-E3161A

**IC :** 579C-E3161A

**EUT Description :** SMARTPHONE

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS - 247 ISSUE 2

**Date Of Issue:**  
August 28, 2017

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888

**NVLAP**<sup>®</sup>

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	8/23/2017	Initial Issue	Chin Pang
V2	8/28/2017	Address TCB's Questions	Chin Pang

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	6
4.2. <i>SAMPLE CALCULATION</i> .....	6
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	7
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	8
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	8
5.4. <i>SOFTWARE AND FIRMWARE</i> .....	8
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	9
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	10
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>15</b>
<b>7. MEASUREMENT METHODS .....</b>	<b>16</b>
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>17</b>
8.1. <i>11b UAT 1 SISO MODE IN THE 2.4GHz BAND .....</i>	<i>20</i>
8.1.1. 6 dB BANDWIDTH.....	20
8.1.2. 99% BANDWIDTH.....	25
8.1.3. AVERAGE POWER .....	30
8.1.4. OUTPUT POWER .....	31
8.1.5. POWER SPECTRAL DENSITY .....	33
8.1.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	38
8.2. <i>11b LAT 3 SISO MODE IN THE 2.4GHz BAND .....</i>	<i>46</i>
8.2.1. 6 dB BANDWIDTH.....	46
8.2.2. 99% BANDWIDTH.....	51
8.2.3. AVERAGE POWER .....	56
8.2.4. OUTPUT POWER .....	57
8.2.5. POWER SPECTRAL DENSITY .....	59
8.2.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	64
8.3. <i>11n HT20 UAT 1 SISO MODE IN THE 2.4GHz BAND .....</i>	<i>72</i>
8.3.1. 6 dB BANDWIDTH.....	72
8.3.2. 99% BANDWIDTH.....	78
8.3.3. AVERAGE POWER .....	84
8.3.4. OUTPUT POWER .....	85

8.3.5. POWER SPECTRAL DENSITY .....	87
8.3.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	93
<b>8.4. 11n HT20 LAT 3 SISO MODE IN THE 2.4GHz BAND .....</b>	<b>104</b>
8.4.1. 6 dB BANDWIDTH.....	104
8.4.2. 99% BANDWIDTH.....	110
8.4.3. AVERAGE POWER .....	116
8.4.4. OUTPUT POWER .....	117
8.4.5. POWER SPECTRAL DENSITY .....	119
8.4.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	125
<b>8.5. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND .....</b>	<b>136</b>
8.5.1. 6 dB BANDWIDTH.....	136
8.5.2. 99% BANDWIDTH.....	147
8.5.3. AVERAGE POWER .....	158
8.5.4. OUTPUT POWER .....	159
8.5.5. POWER SPECTRAL DENSITY .....	161
8.5.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	172
<b>9. RADIATED TEST RESULTS.....</b>	<b>193</b>
9.1. LIMITS AND PROCEDURE .....	193
<b>9.2. TRANSMITTER ABOVE 1 GHz .....</b>	<b>194</b>
9.2.1. 11b UAT 1 SISO MODE IN THE 2.4GHz BAND .....	194
9.2.2. 11b LAT 3 SISO MODE IN THE 2.4GHz BAND .....	212
9.2.3. 11n HT20 UAT 1 SISO MODE IN THE 2.4GHz BAND.....	230
9.2.4. 1n HT20 LAT 3 SISO MODE IN THE 2.4GHz BAND .....	247
9.2.5. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND .....	264
9.3. WORST-CASE BELOW 1 GHz.....	286
9.4. WORST-CASE 18 to 26 GHz.....	288
<b>10. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>290</b>
10.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE.....	291
10.2. EUT POWERED BY HOST PC VIA USB CABLE.....	293
10.3. SETUP PHOTOS .....	295

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** SMARTPHONE

**MODEL:** A1865, A1903

**SERIAL NUMBER:** C39TX02KJ8PT

**DATE TESTED:** MAY 18, 2017 – AUGUST 04, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 2	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



---

Chin Pang  
Senior Engineer  
UL VERIFICATION SERVICES INC.

Prepared By:



---

Tri Pham  
Test Engineer  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v04, ANSI C63.10-2013, MIMO KDB 662911, RSS-GEN Issue 4, and RSS-247 Issue 2.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A (IC:2324B-1)	<input checked="" type="checkbox"/> Chamber D (IC: 22541-1)
<input type="checkbox"/> Chamber B (IC:2324B-2)	<input checked="" type="checkbox"/> Chamber E (IC: 22541-2)
<input type="checkbox"/> Chamber C (IC:2324B-3)	<input checked="" type="checkbox"/> Chamber F (IC: 22541-3)
	<input type="checkbox"/> Chamber G (IC: 22541-4)
	<input checked="" type="checkbox"/> Chamber H (IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The equipment under test is a mobile phone with GSM, GPRS, EGPRS, UMTS, LTE and TD-SCDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth, GPS and NFC. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted peak output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b 1TX	25.31	339.63
2412 - 2472	802.11g 1TX	Covered by HT20 1TX	
2412 - 2472	802.11g 2TX	Covered by HT20 2TX CDD	
2412 - 2472	802.11n HT20 1TX	27.69	587.49
2412 - 2472	802.11n HT20 2TX CDD	29.74	941.89

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	UAT 1	LAT 3
2.4	-1.67	-4.42

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 13.10.452.12

## 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, above 18GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

For g and HT20 modes, radiated harmonics spurious and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations, X (Flatbed), Y (Landscape), and Z (Portrait), on both UAT 1 and LAT 3 antennas. In addition, the EUT was also investigated with and without AC/DC charger, headphones & laptop. It was determined that X (Flatbed) orientation was worst-case orientation for both antennas without AC/DC charger, headphones, or laptop; therefore, all final radiated testing was performed with EUT only in X orientation for 1 - 18GHz and 18 – 26GHz. And for 30-1GHz EUT was tested with AC/DC charger.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20 mode: MCS0

The following modes have the same target power and use the same modulation (OFDM). Therefore, 802.11g 1TX and 802.11g 2TX are covered by 802.11n HT20 1TX and 802.11n HT20 2TX CDD respectively.

- 802.11g and 802.11n HT20 1TX
- 802.11g 2TX and 802.11n HT20 2TX CDD

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Apple	A1344	T1580	NA
Laptop	Apple	A1278	C02HJ0A7DTY4	NA
DC power supply	Lambda	GEN 60-25	SCPV56329	NA

### I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Shielded	1	N/A
2	USB	1	USB	Shielded	1	Laptop to EUT
3	AC	1	AC	Un-shielded	3	N/A
4	Aligator clip	1	minigrabber	Un-Shielded	1	DC power supply to EUT

### I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
NA						

### I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A


### I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A
2	USB	1	USB	Shielded	1	N/A

### TEST SETUP

The EUT was tested connected to a host Laptop via USB cable adapter and SMA cable connected to antenna port. Test software exercised the EUT.


### SETUP DIAGRAM

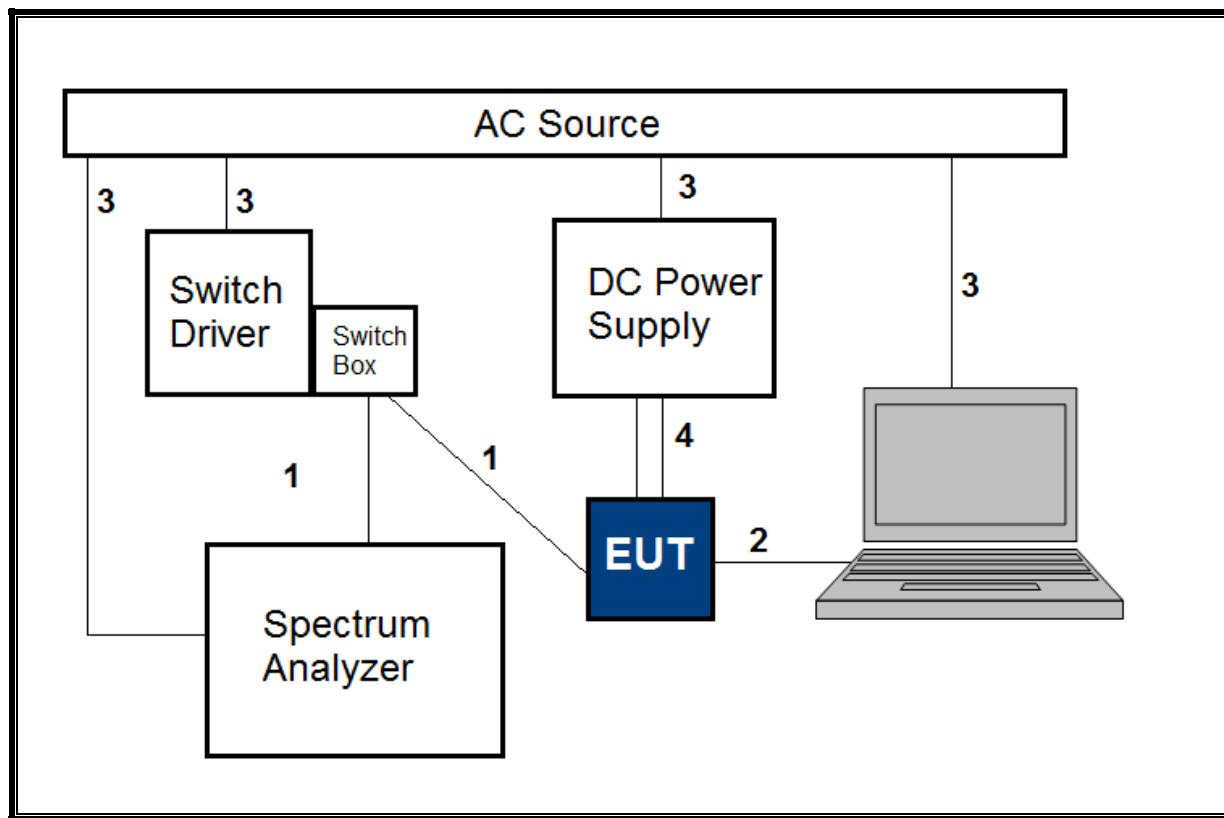

**TEST SETUP- RADIATED-ABOVE 1 GHZ**

The EUT was powered by battery. Test software exercised the EUT.


**SETUP DIAGRAM**

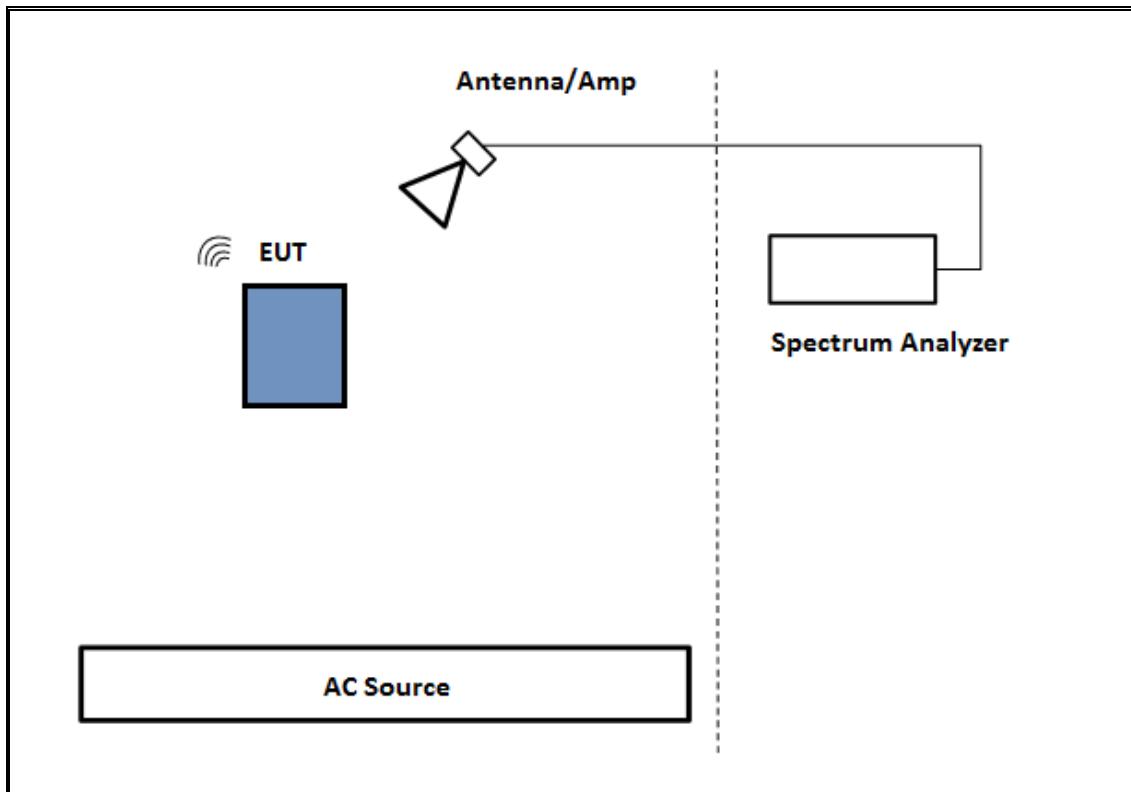

**TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS**

The EUT was powered by AC/DC adapter. Test software exercised the EUT.


**SETUP DIAGRAM**

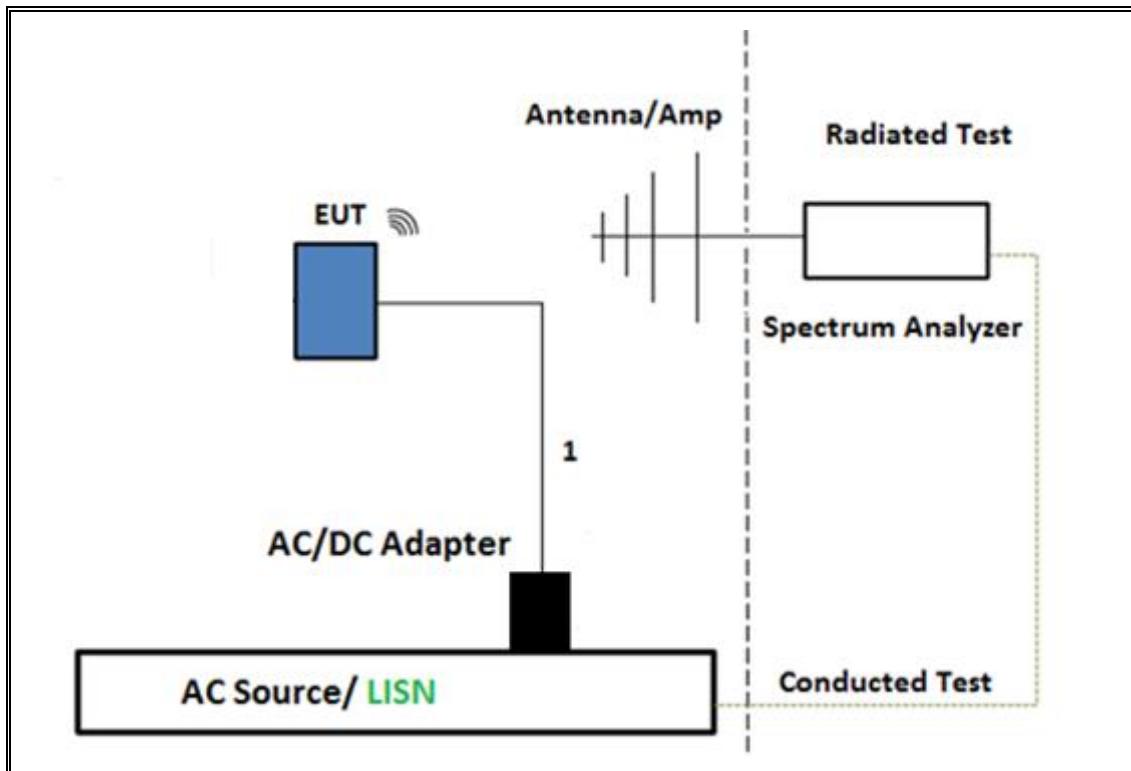

**TEST SETUP- AC LINE CONDUCTED TEST (LAPTOP CONFIGURATION)**

The EUT was tested connected to a host Laptop via USB cable. Test software exercised the EUT.

**SETUP DIAGRAM**

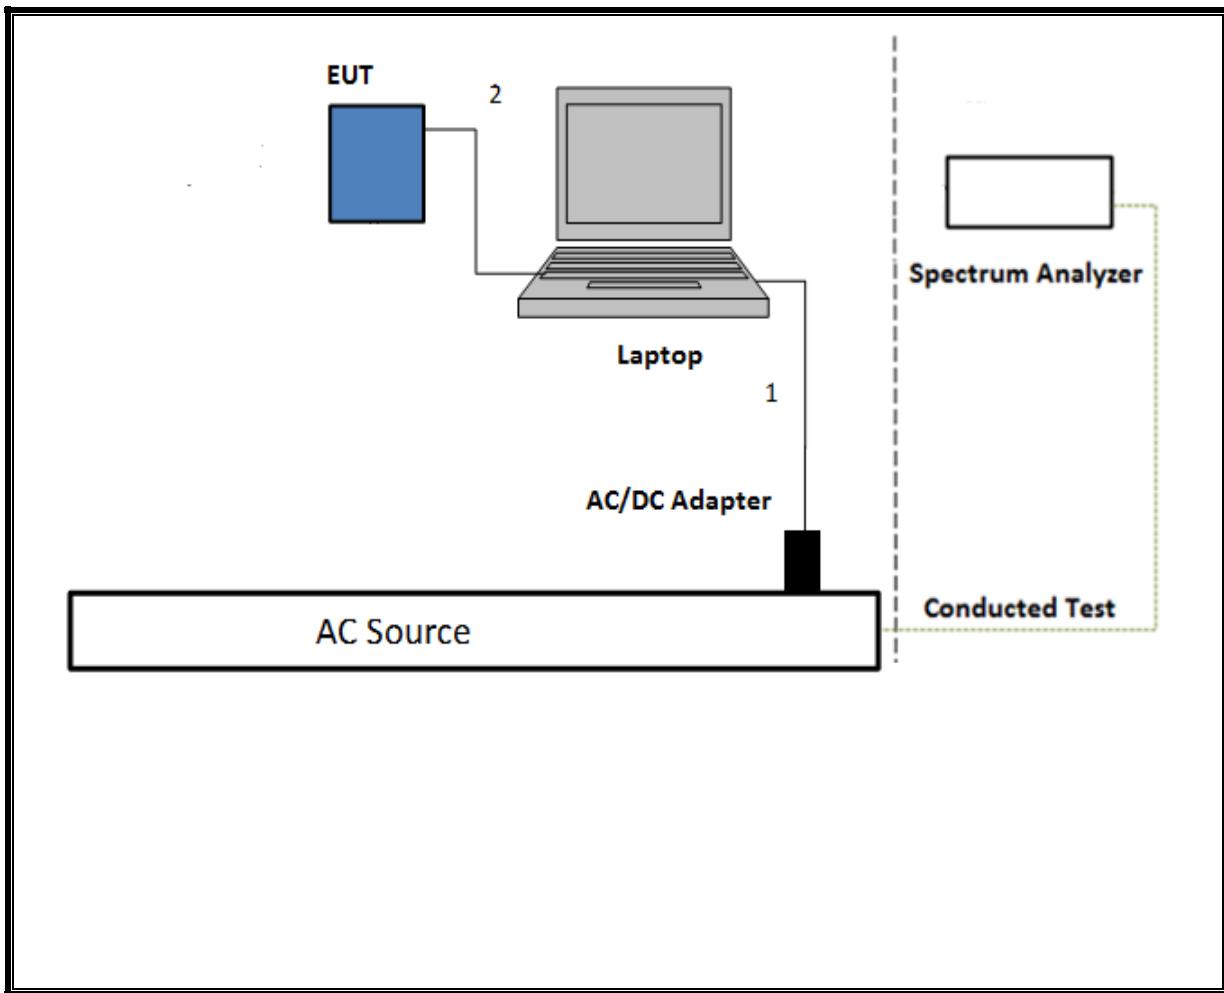

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T711	1/30/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	11/29/17
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/14/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T863	6/9/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T741	11/29/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1113	12/20/2017
Amplifier, 1 to 18GHz, 35dB	Amplical	AMP1G18-35	T1569	9/15/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T344	4/20/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T185	3/30/2018
Amplifier, 1 to 18GHz, 35dB	Amplical	AMP1G18-35	T1569	9/15/2017
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T835	6/18/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1613	12/2/2017
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	6/16/2017
*Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	07/05/2017
Spectrum Analyzer, 40GHz	Agilent	8564E	T106	9/7/2017
*Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T459	06/13/2017
Power Sensor	Keysight	N1921A	T1224	1/31/2018
Power Meter, P-series single channel	Keysight	N1912A	T1245	1/05/2018
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1124	10/07/2017
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	6/8/2017
Power Cable, Line Conducted Emissions	UL	PG1	T861	9/1/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

NOTE: Equipment that calibrated during the testing period was set for test after the calibration.

\*Testing is completed before equipment expiration date.

## 7. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v04, Section 8.1.

Output Power: KDB 558074 D01 v04, Section 9.1.3.

Power Spectral Density: KDB 558074 D01 v04, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v04, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v04, Section 12.1.

Band-edge: KDB 558074 D01 v04, Section 12.1.

Conducted line emissions: C63.10, Clause 6.2

## 8. ANTENNA PORT TEST RESULTS

### ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.



#### PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
<b>2.4GHz Band</b>						
802.11b 1TX	0.535	0.535	1.000	100.00%	0.00	0.010
802.11n HT20 1TX	1.920	1.943	0.988	98.82%	0.00	0.010
802.11n HT20 CDD	1.920	1.942	0.989	98.87%	0.00	0.010

## DUTY CYCLE PLOTS

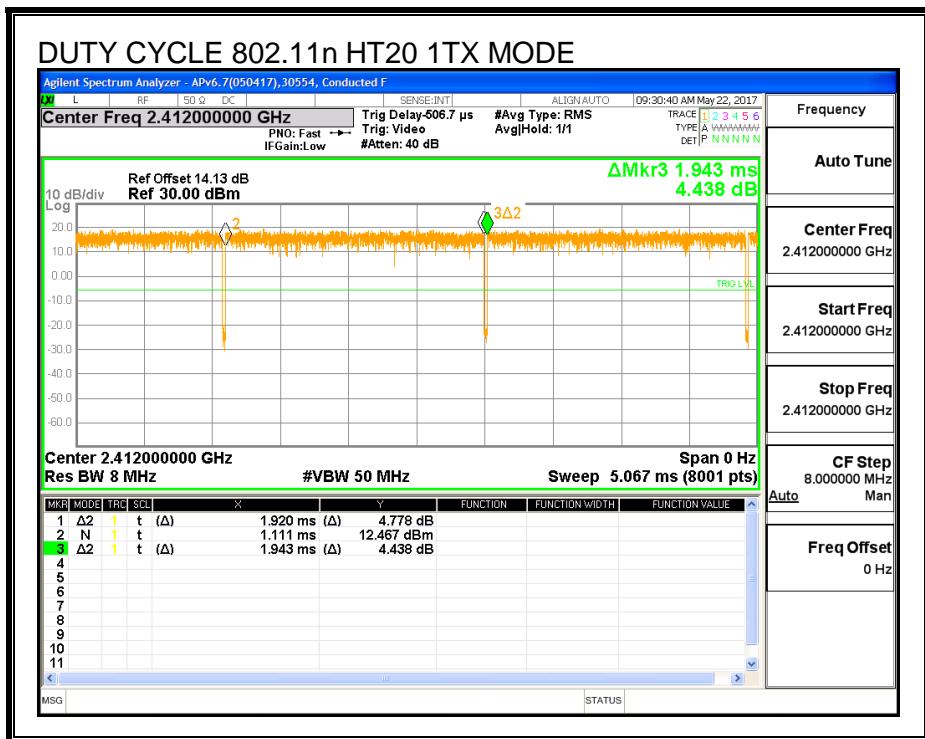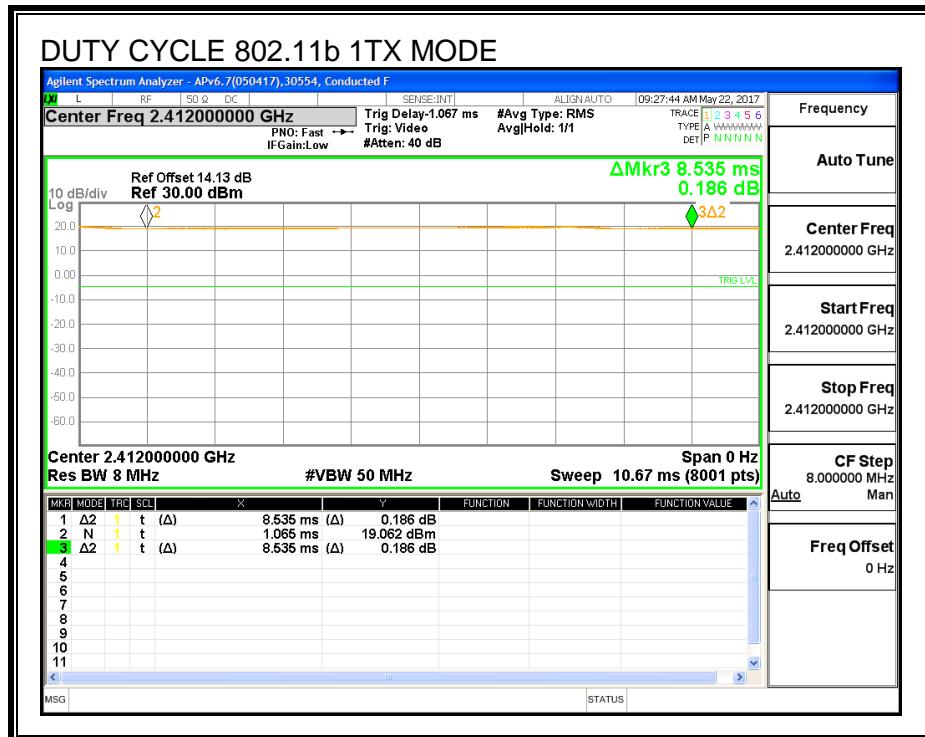

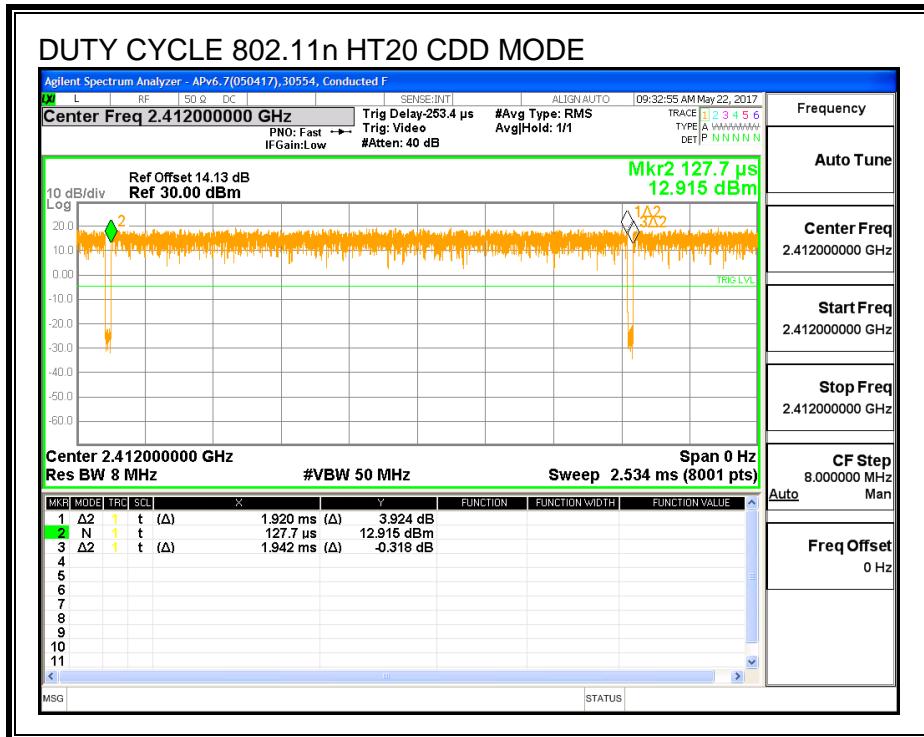

## 8.1. 11b UAT 1 SISO MODE IN THE 2.4GHz BAND

### 8.1.1. 6 dB BANDWIDTH

#### LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (a)



The minimum 6 dB bandwidth shall be at least 500 kHz.


#### RESULTS

Channel	Frequency	6 dB BW UAT 1 (MHz)	Minimum Limit (MHz)
Low_1	2412	9.08	0.5
Low_2	2417	8.08	0.5
Middle_6	2437	8.56	0.5
High_10	2457	8.56	0.5
High_11	2462	8.60	0.5
High_12	2467	8.56	0.5
High_13	2472	7.80	0.5

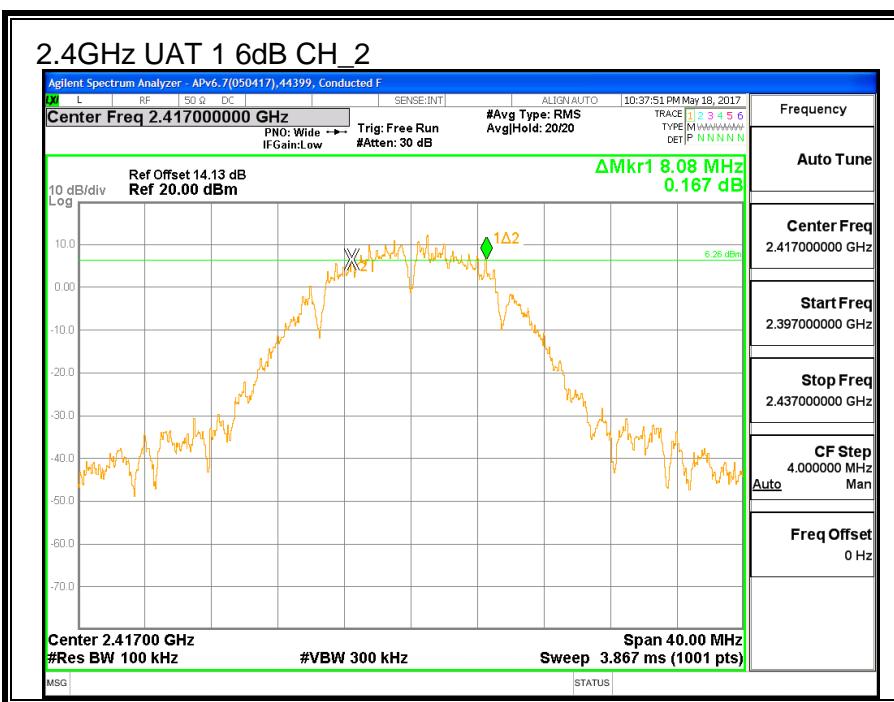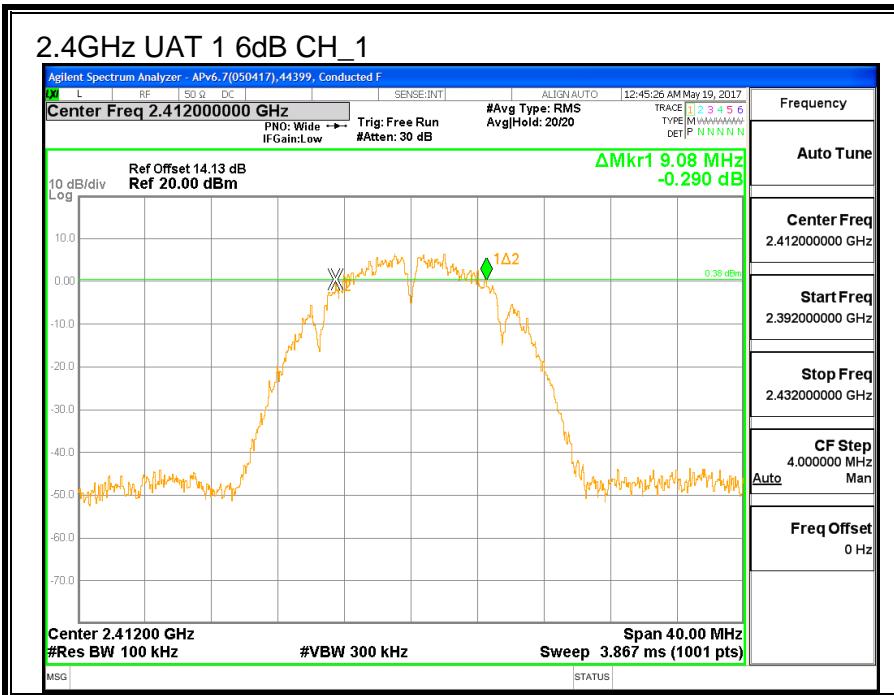

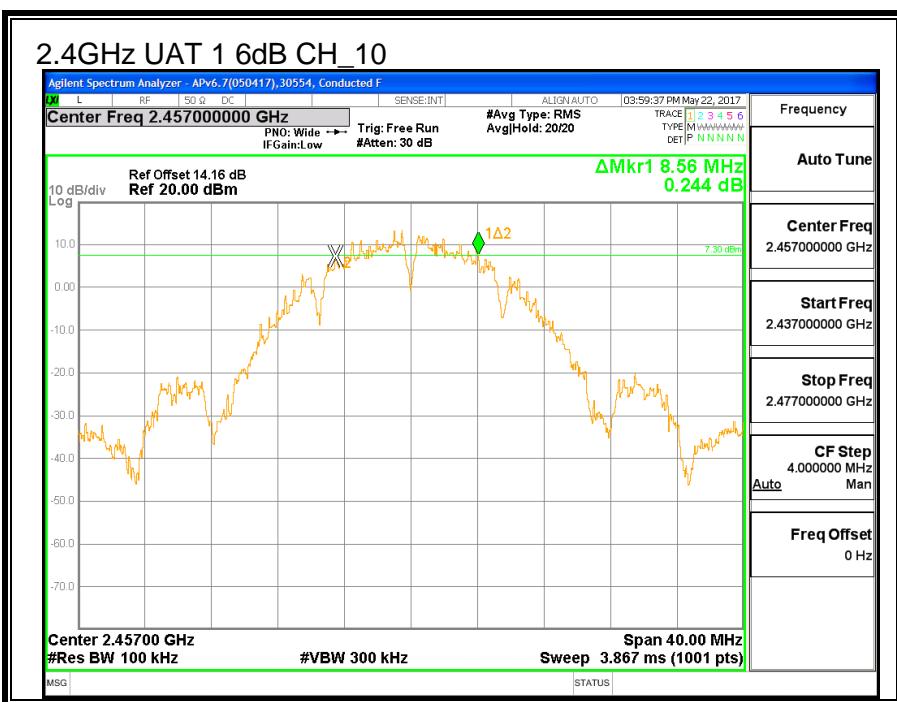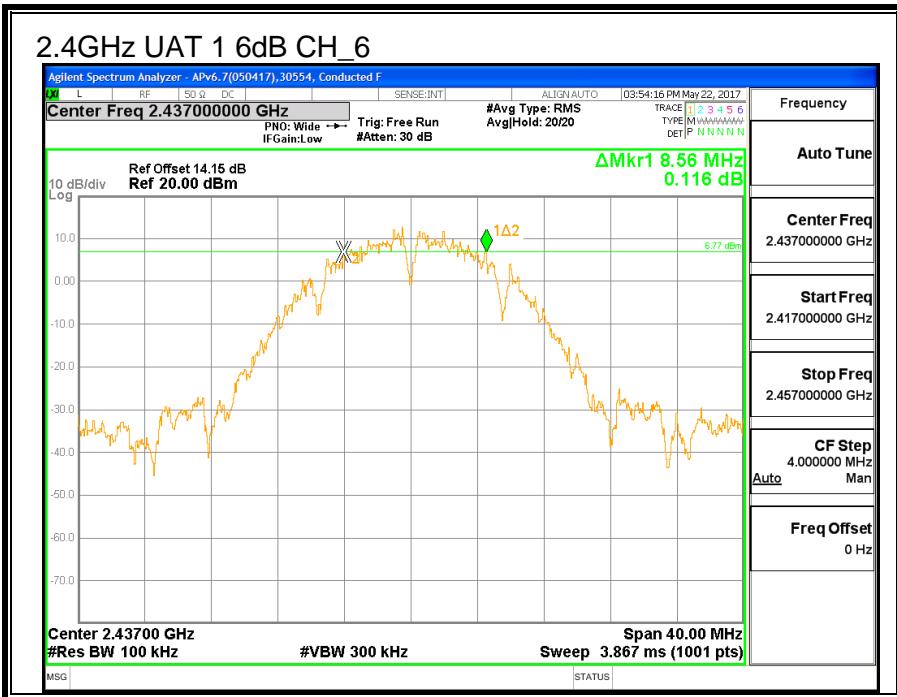

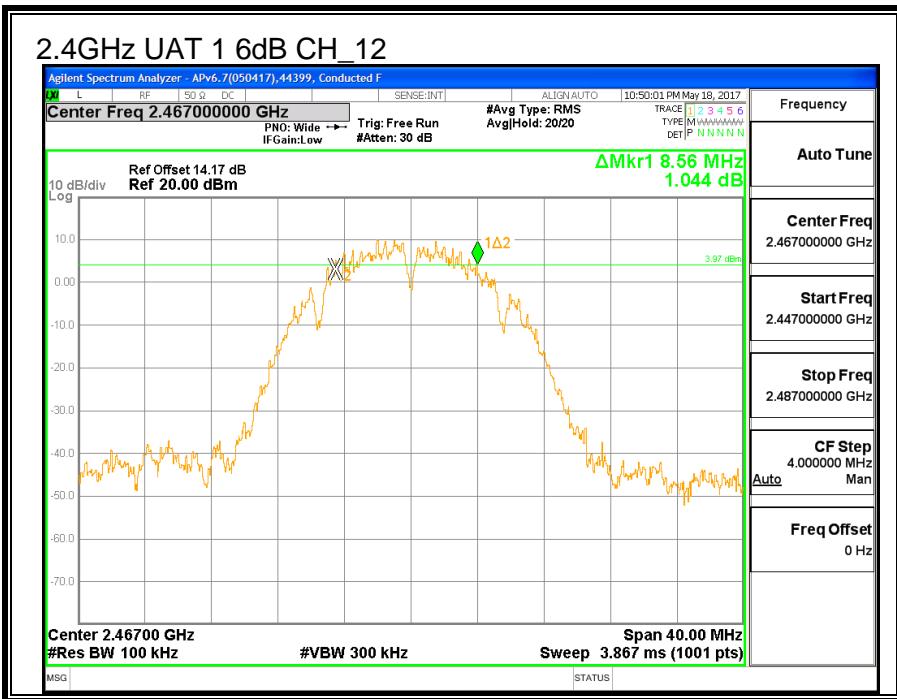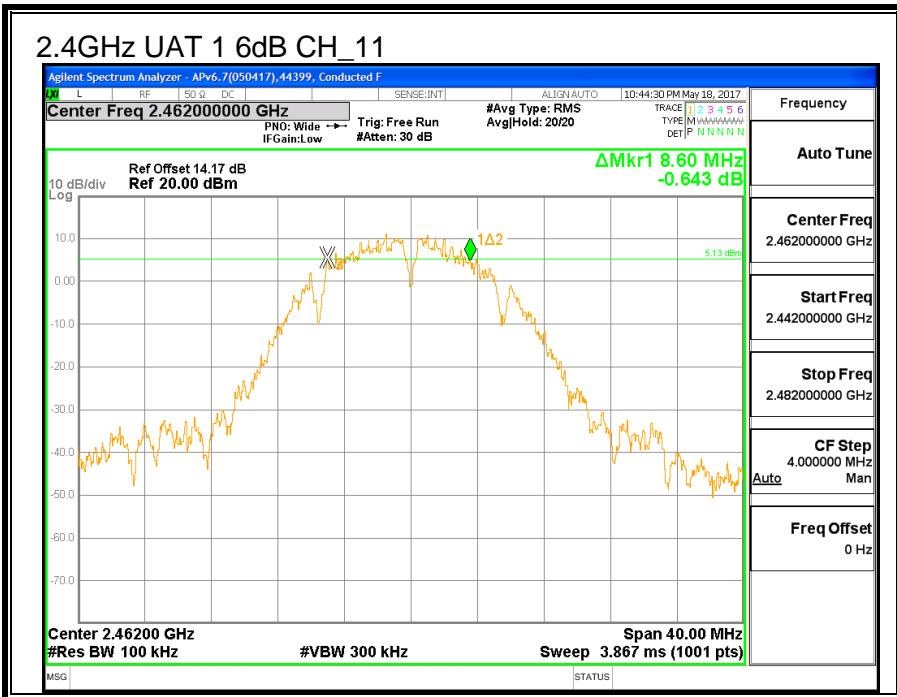

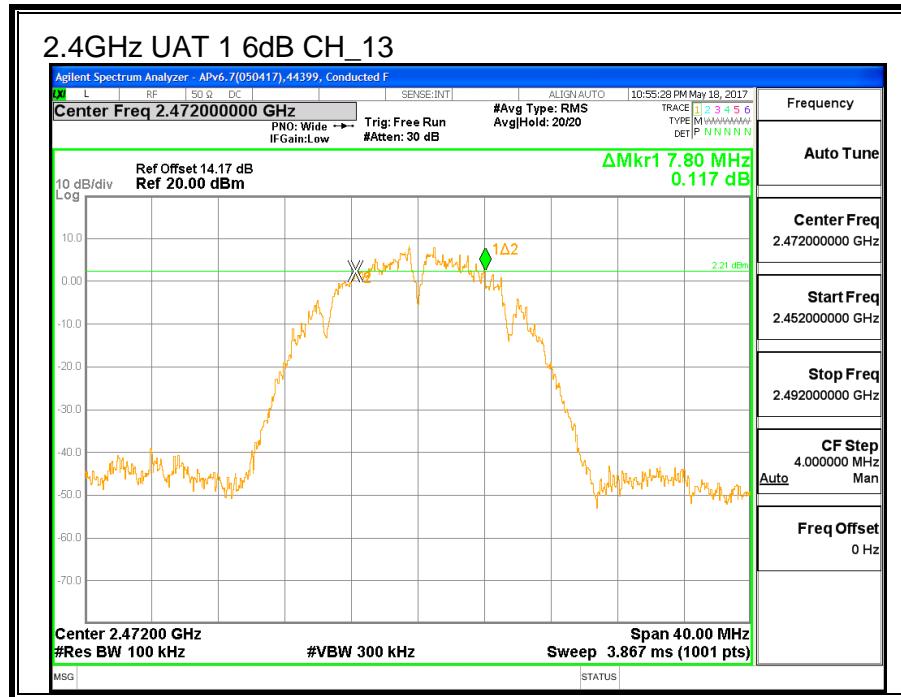



### 8.1.2. 99% BANDWIDTH



#### LIMITS



None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth UAT 1 (MHz)
Low_1	2412	12.449
Low_2	2417	13.394
Middle_6	2437	13.702
High_10	2457	14.845
High_11	2462	13.528
High_12	2467	12.901
High_13	2472	12.589

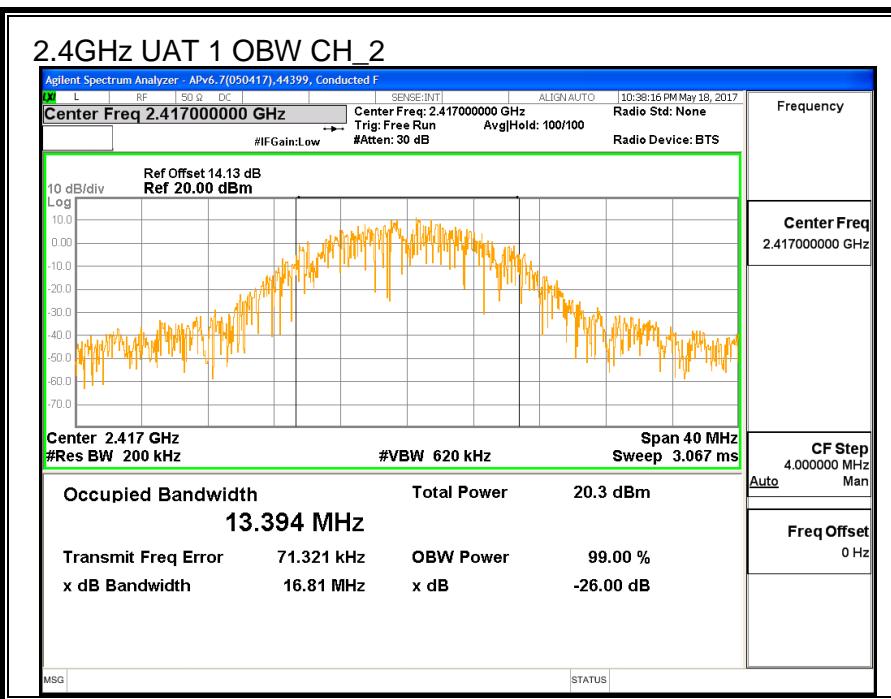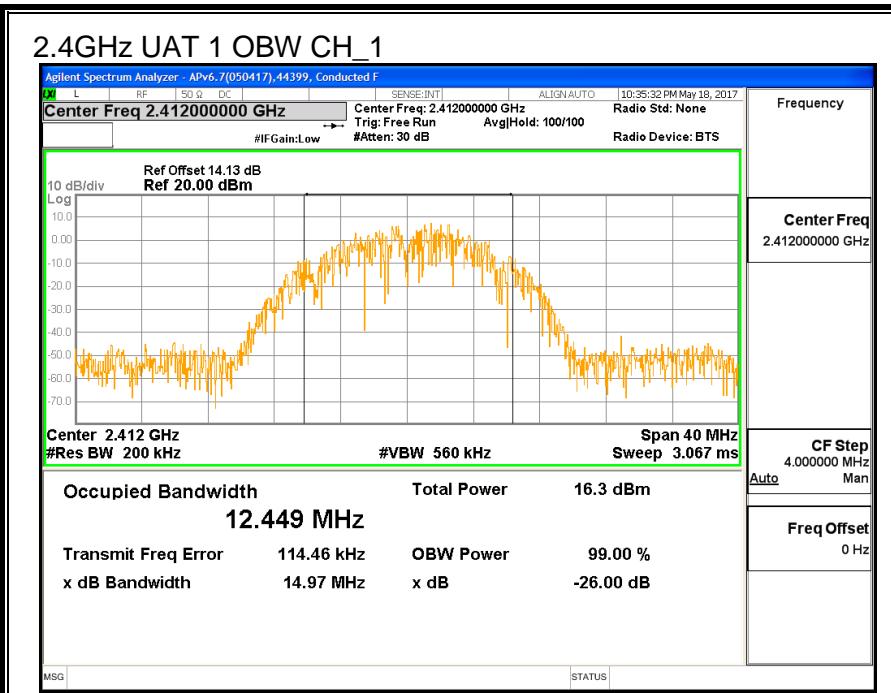

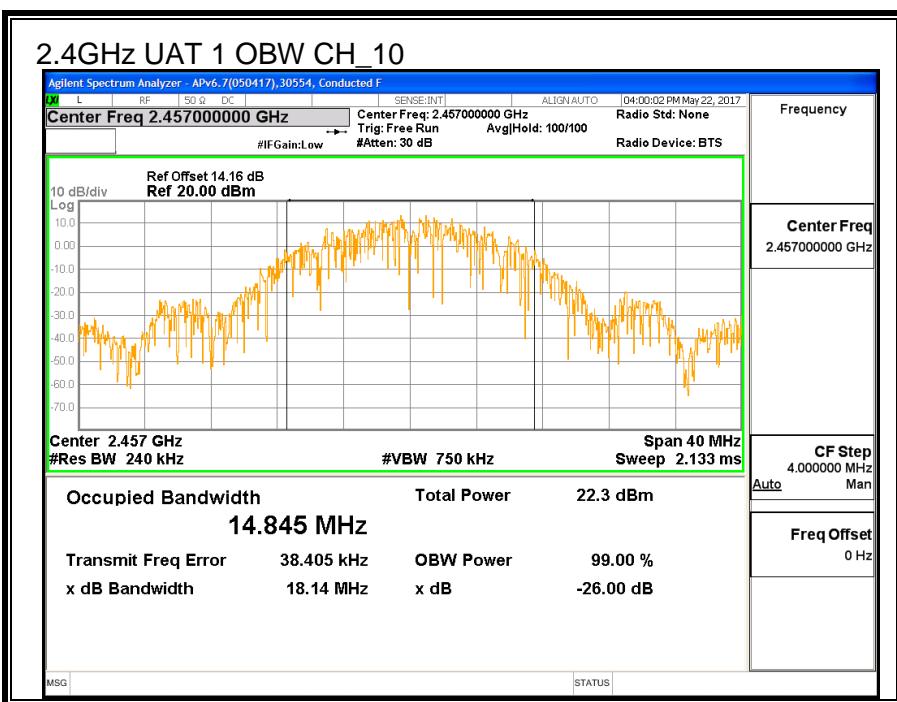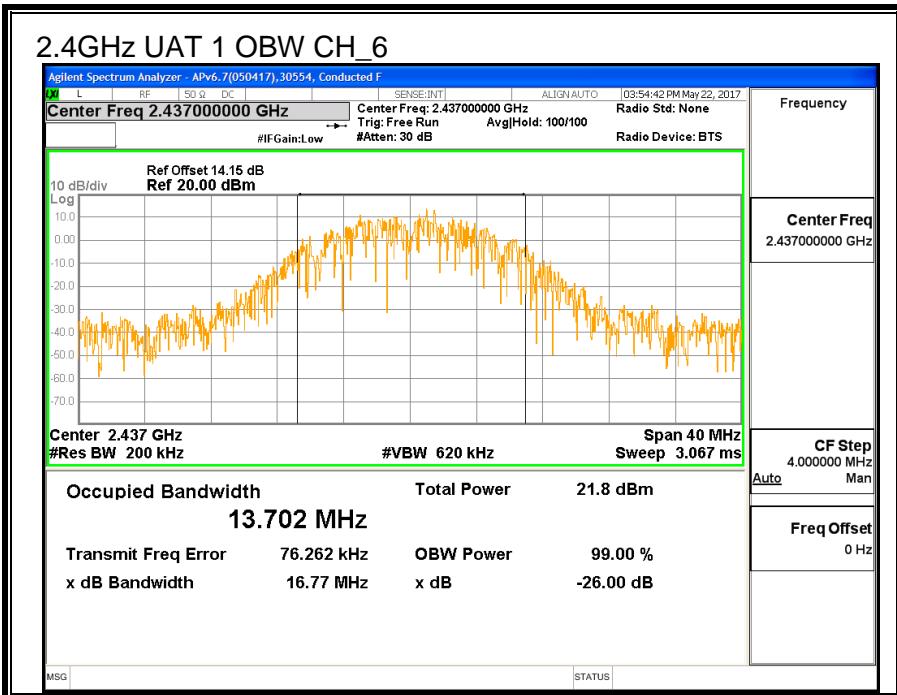

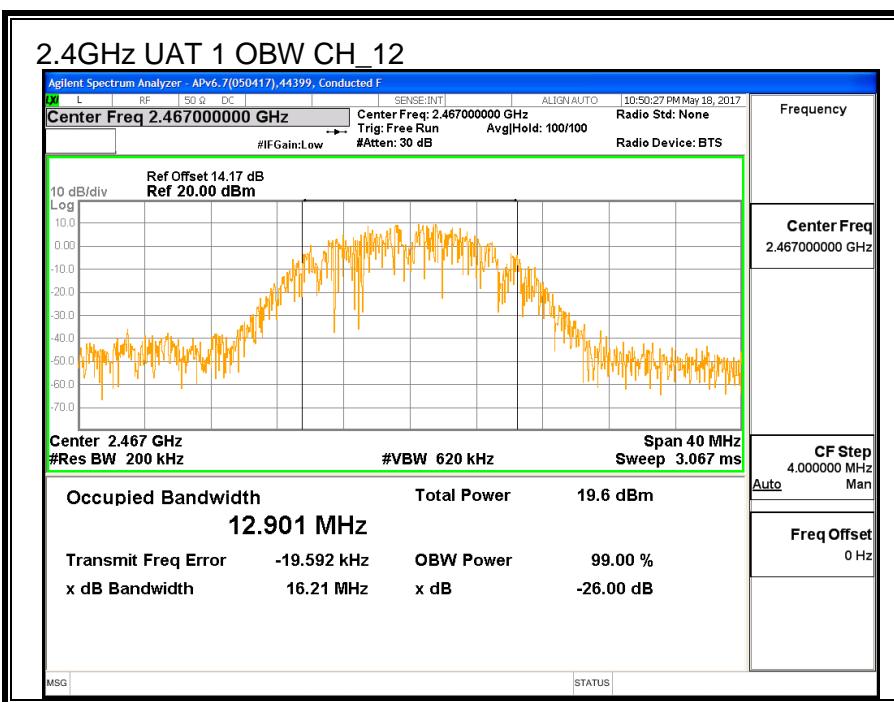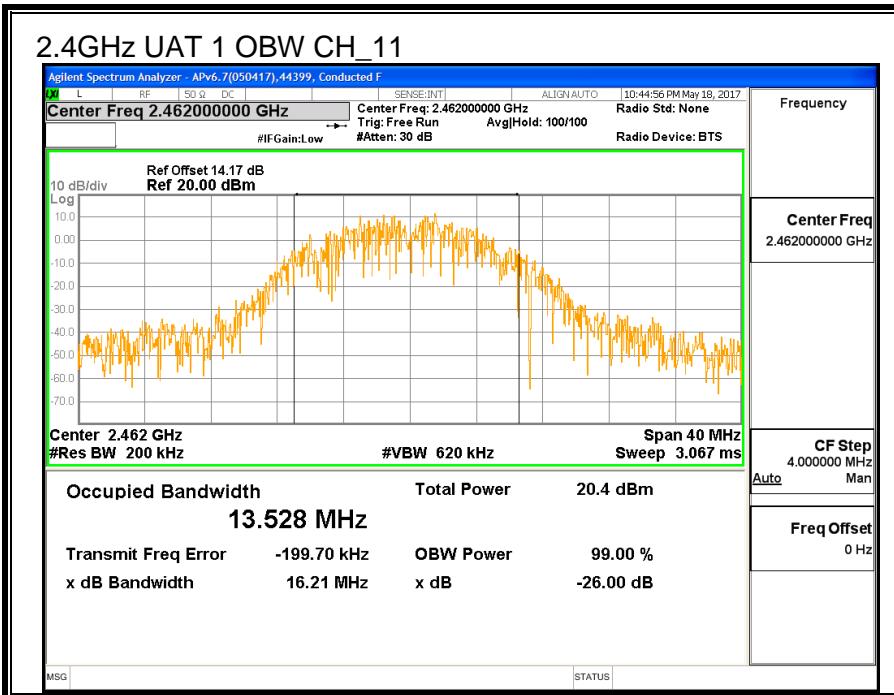

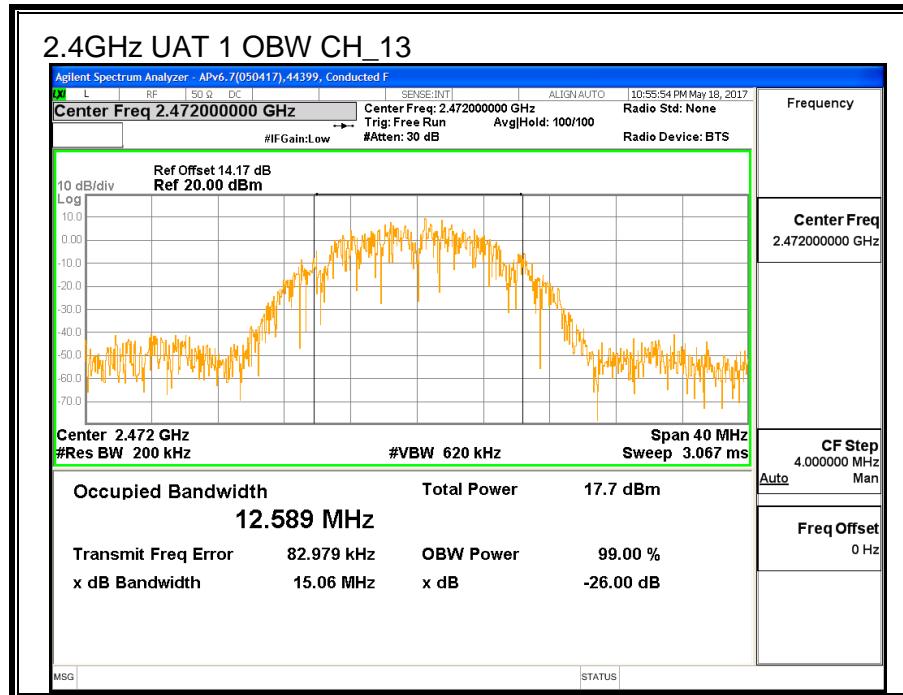

### 8.1.3. AVERAGE POWER

ID:	30554	Date:	8/1/17
-----	-------	-------	--------

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power UAT 1 (MHz)
Low_1	2412	20.47
Low_2	2417	21.92
Middle_6	2437	21.94
High_10	2457	21.87
High_11	2462	21.90
High_12	2467	20.44
High_13	2472	18.89

#### 8.1.4. OUTPUT POWER

<b>ID:</b>	30554	<b>Date:</b>	8/1/17
------------	-------	--------------	--------

#### LIMITS

FCC §15.247

IC RSS-247 (5.4) (d)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	-1.67	30.00	30	36	30.00
Low_2	2417	-1.67	30.00	30	36	30.00
Mid_6	2437	-1.67	30.00	30	36	30.00
High_10	2457	-1.67	30.00	30	36	30.00
High_11	2462	-1.67	30.00	30	36	30.00
High_12	2467	-1.67	30.00	30	36	30.00
High_13	2472	-1.67	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

### Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	23.78	23.78	30.00	-6.22
Low_2	2417	25.11	25.11	30.00	-4.89
Mid_6	2437	24.69	24.69	30.00	-5.31
High_10	2457	25.16	25.16	30.00	-4.84
High_11	2462	25.14	25.14	30.00	-4.86
High_12	2467	23.59	23.59	30.00	-6.41
High_13	2472	21.87	21.87	30.00	-8.13

### 8.1.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247

IC RSS-247 (5.2) (b)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



#### RESULTS



Duty Cycle CF (dB)	0	Included in Calculations of Corr'd PSD
-----------------------	---	---


Results

Channel	Frequency (MHz)	Meas PSD (dBm/3KHz)	Total Corr'd Power (dBm/3KHz)	Limit (dBm/3KHz)	Margin (dB)
Low_1	2412	-5.63	-5.63	8	-13.63
Low_2	2417	-2.74	-2.74	8	-10.74
Middle_6	2437	-0.45	-0.45	8	-8.45
High_10	2457	-0.54	-0.54	8	-8.54
High_11	2462	-1.35	-1.35	8	-9.35
High_12	2467	-2.00	-2.00	8	-10.00
High_13	2472	-5.48	-5.48	8	-13.48

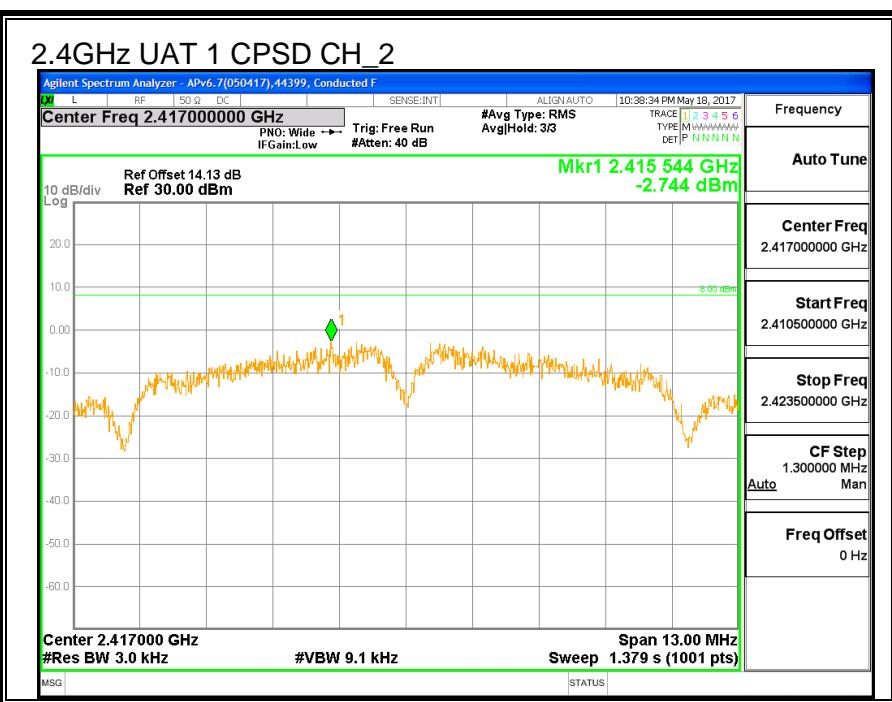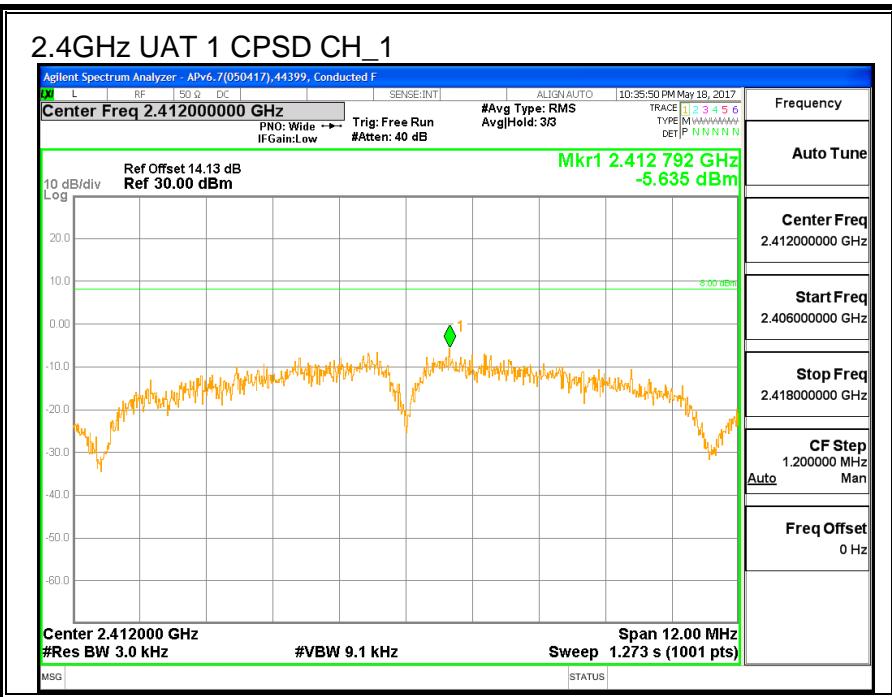

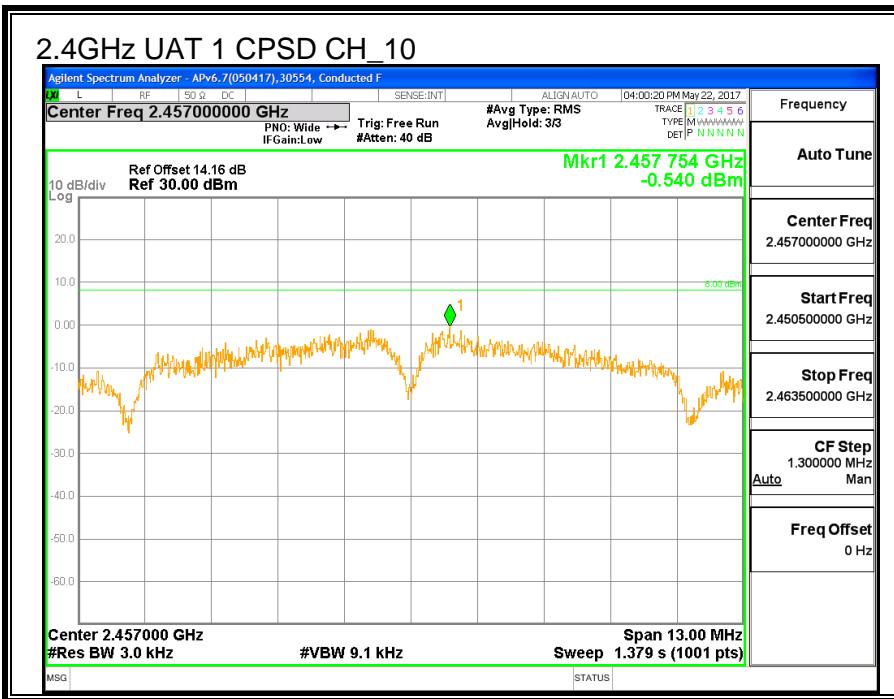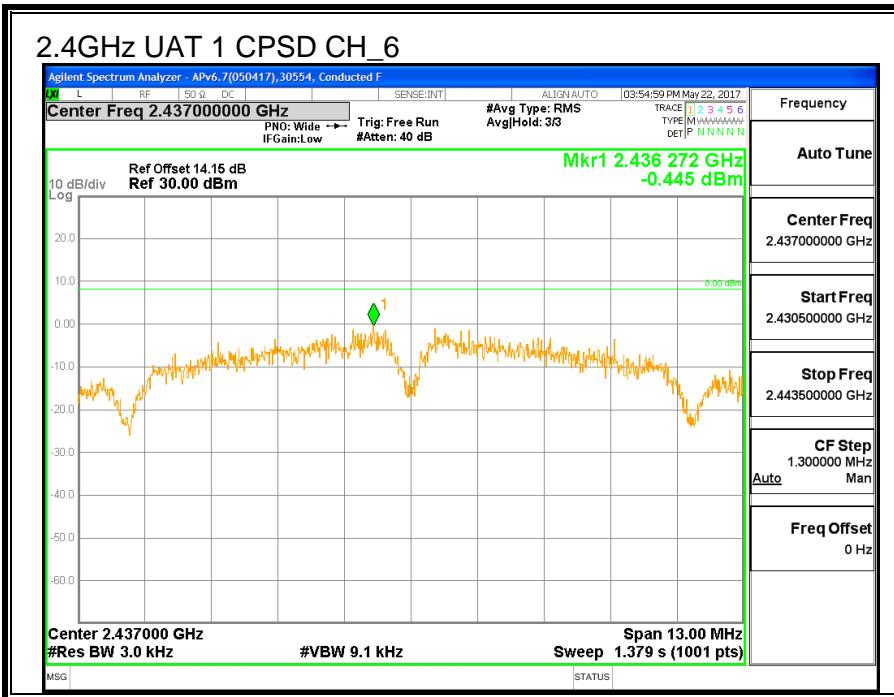

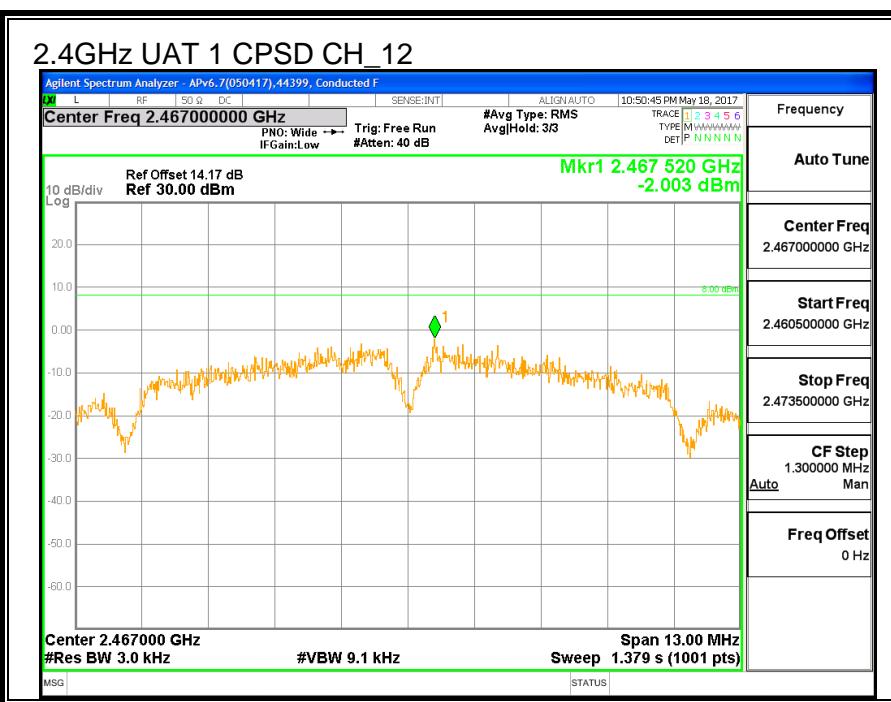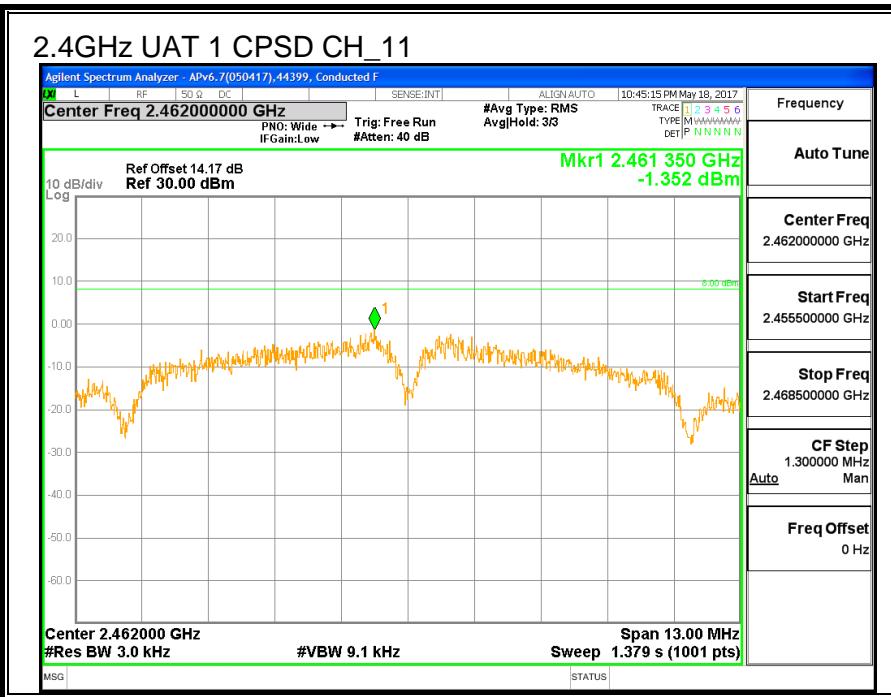

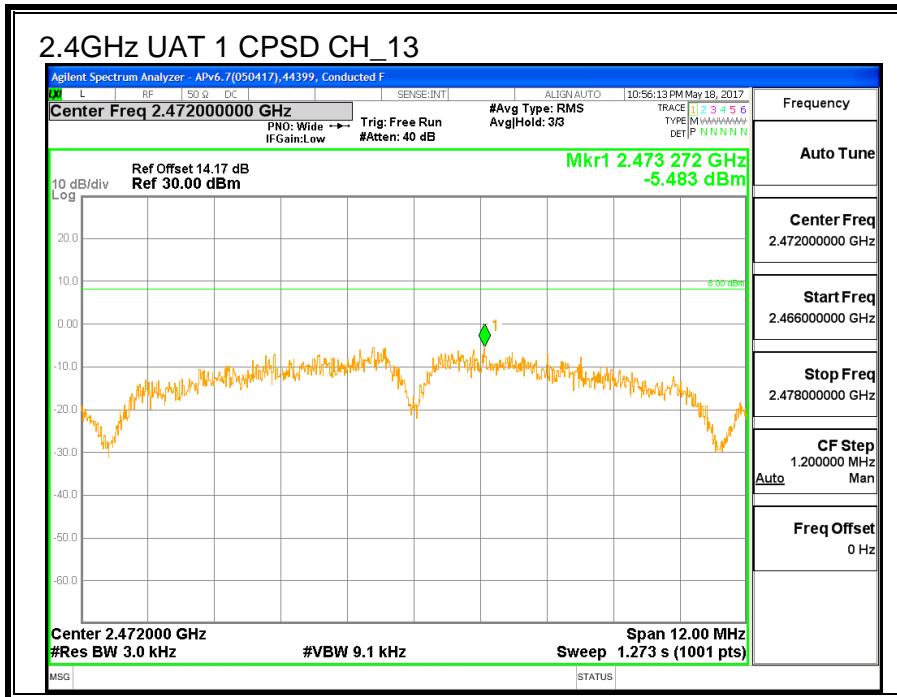

### 8.1.6. CONDUCTED BANDEdge AND SPURIOUS EMISSIONS



#### LIMITS



FCC §15.247 (d)



IC RSS-247 (5.5)



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.



**CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS**

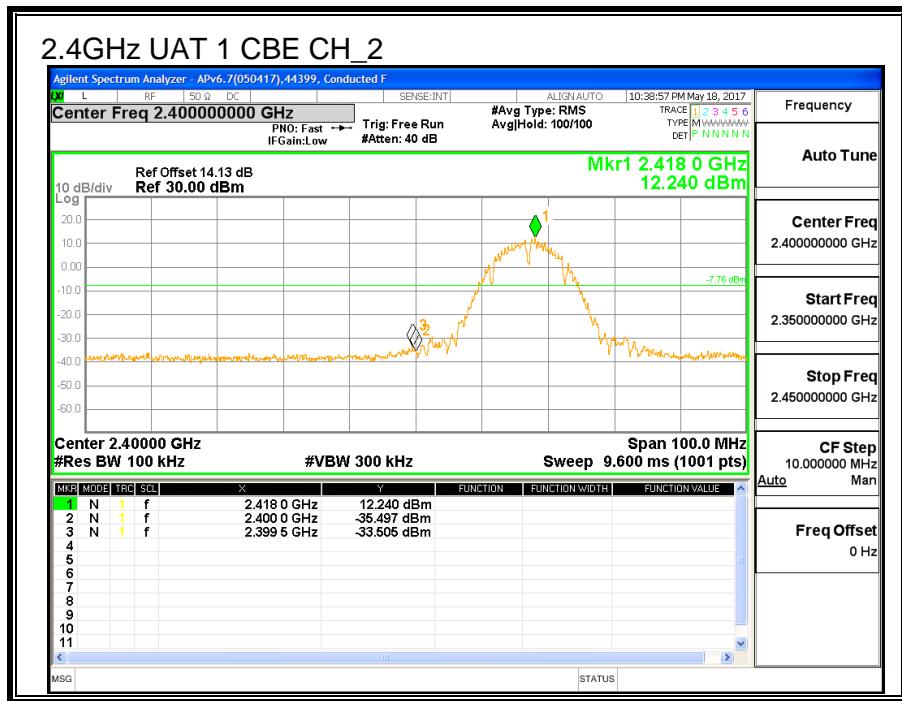
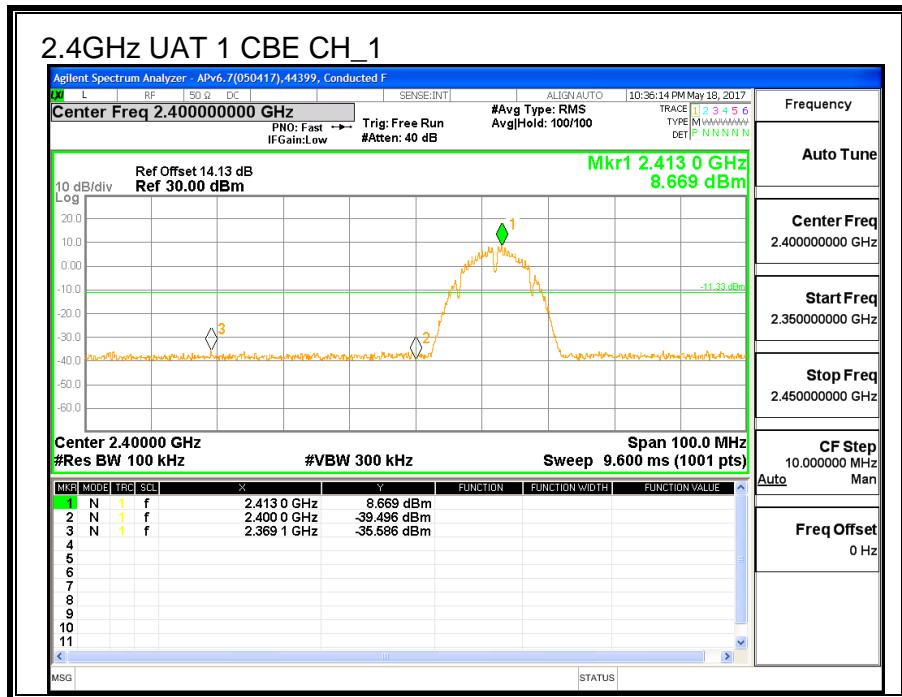


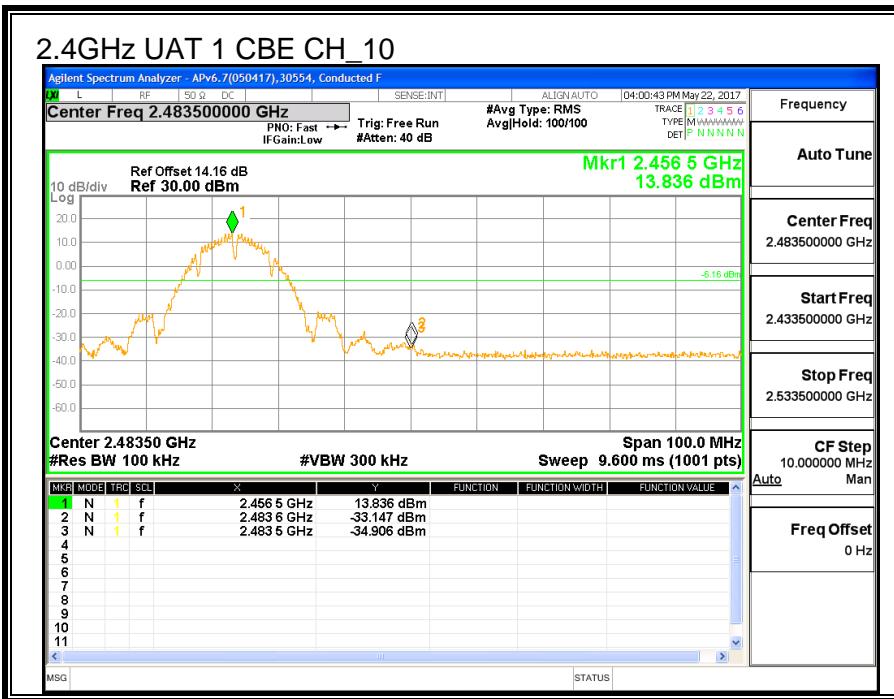
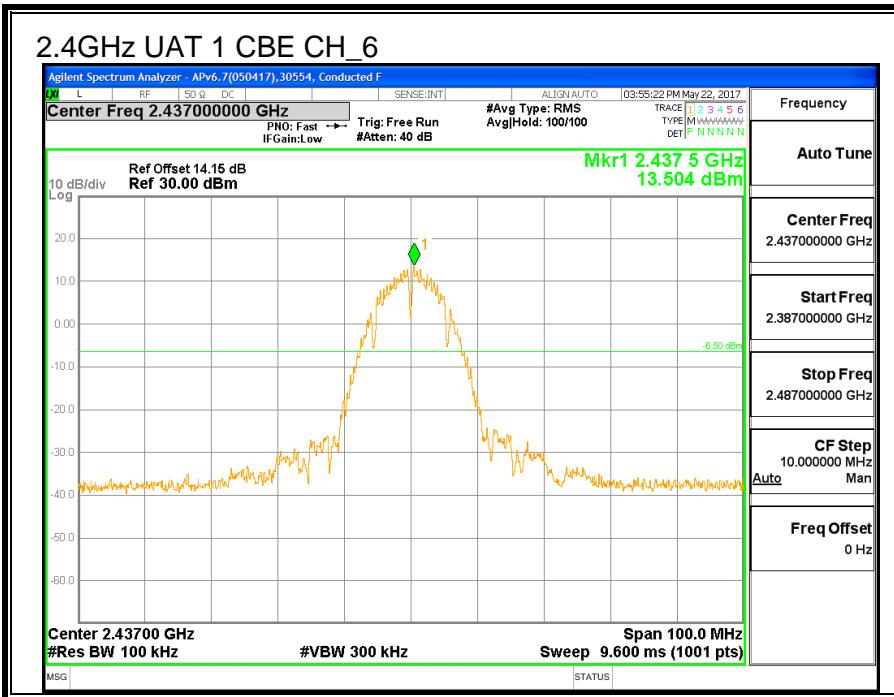


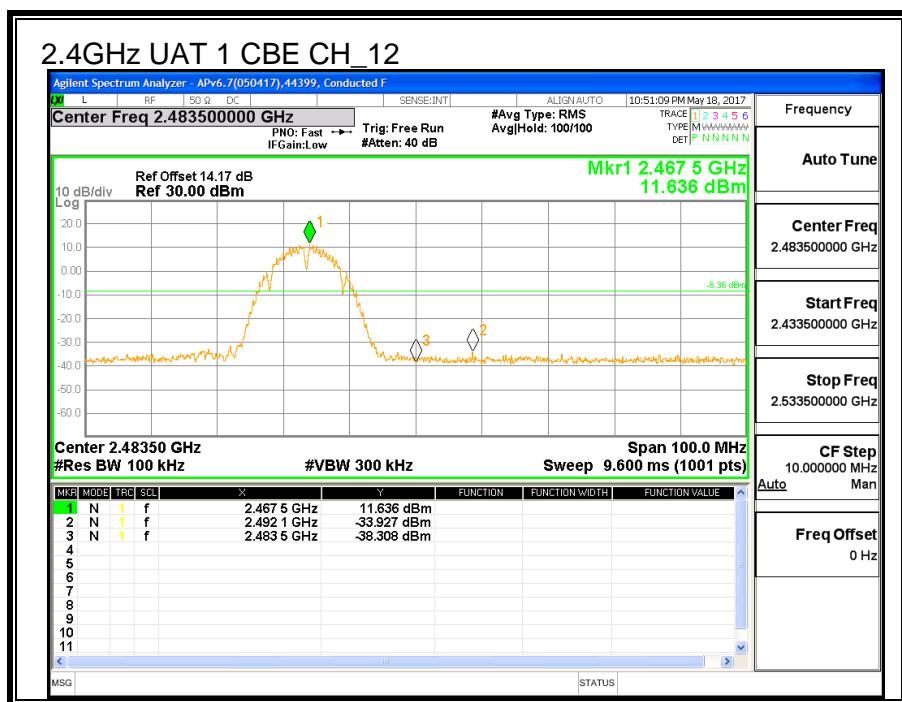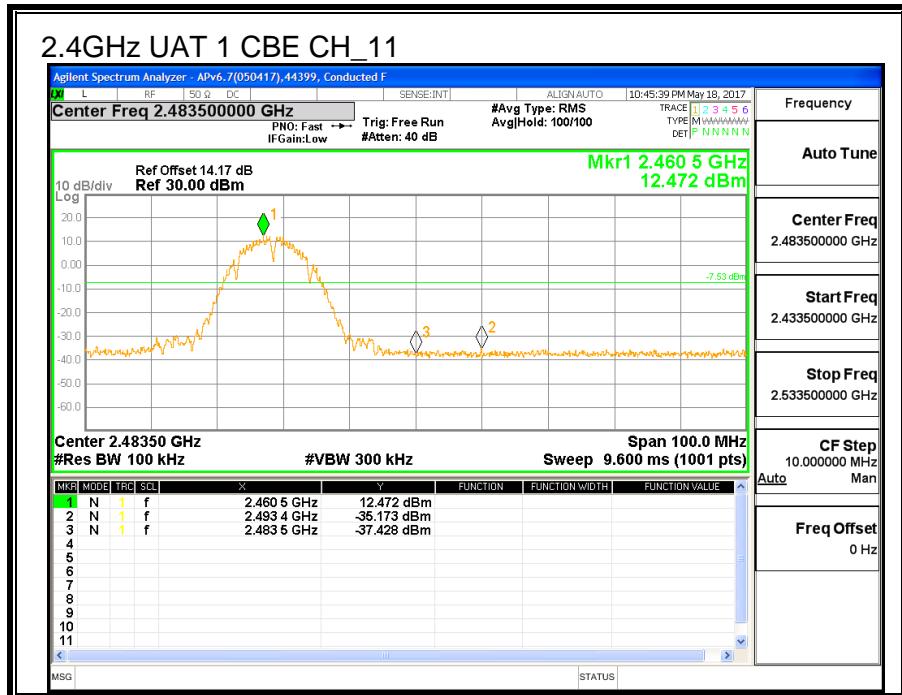

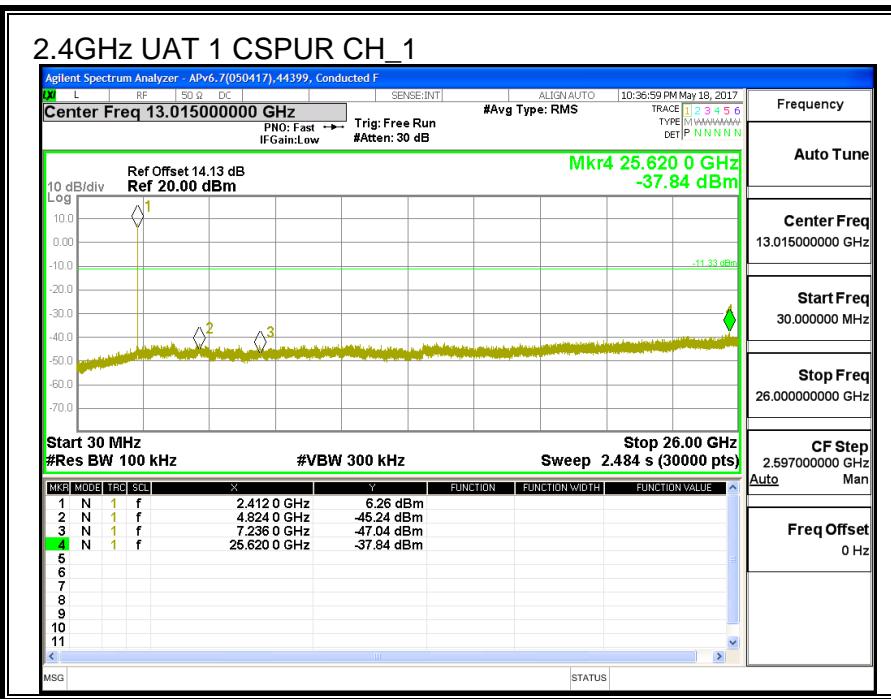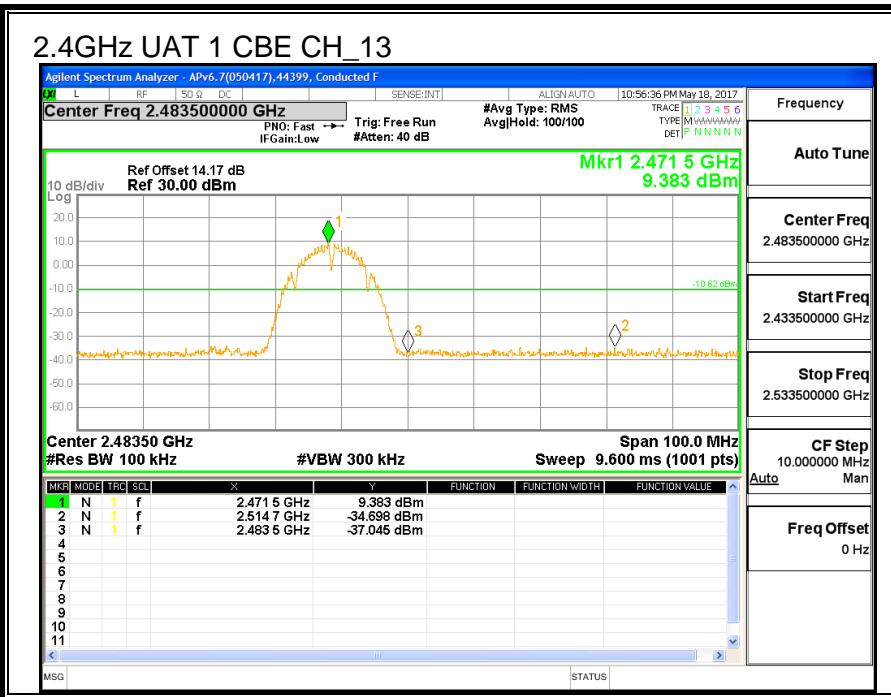

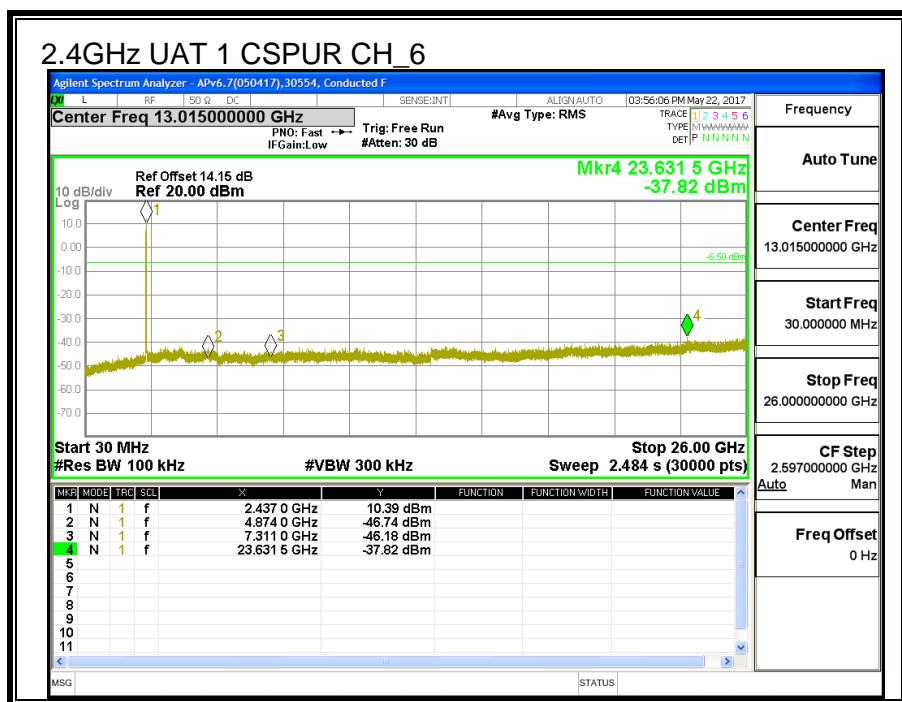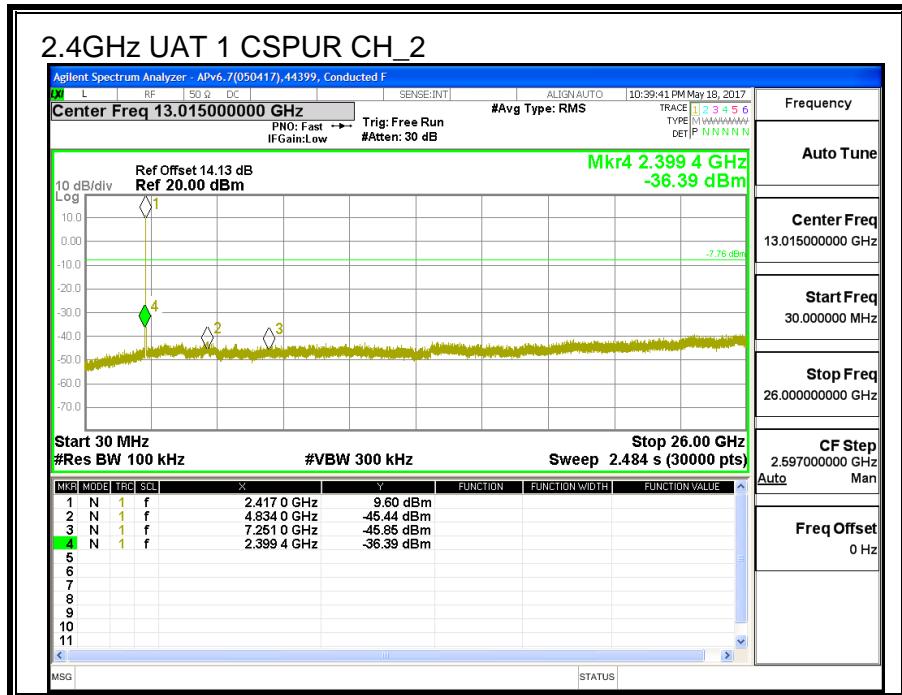

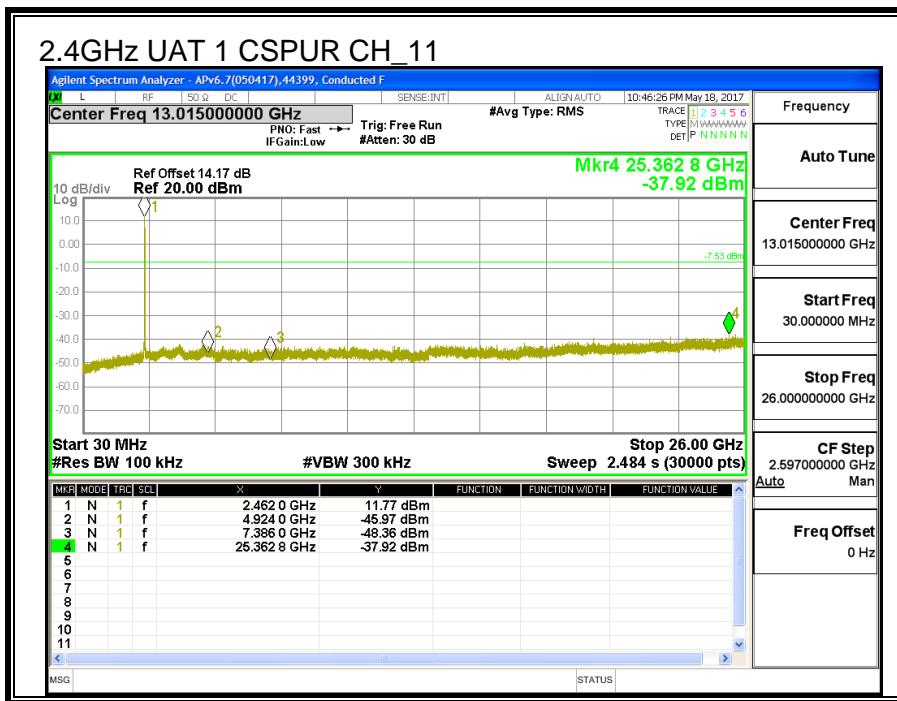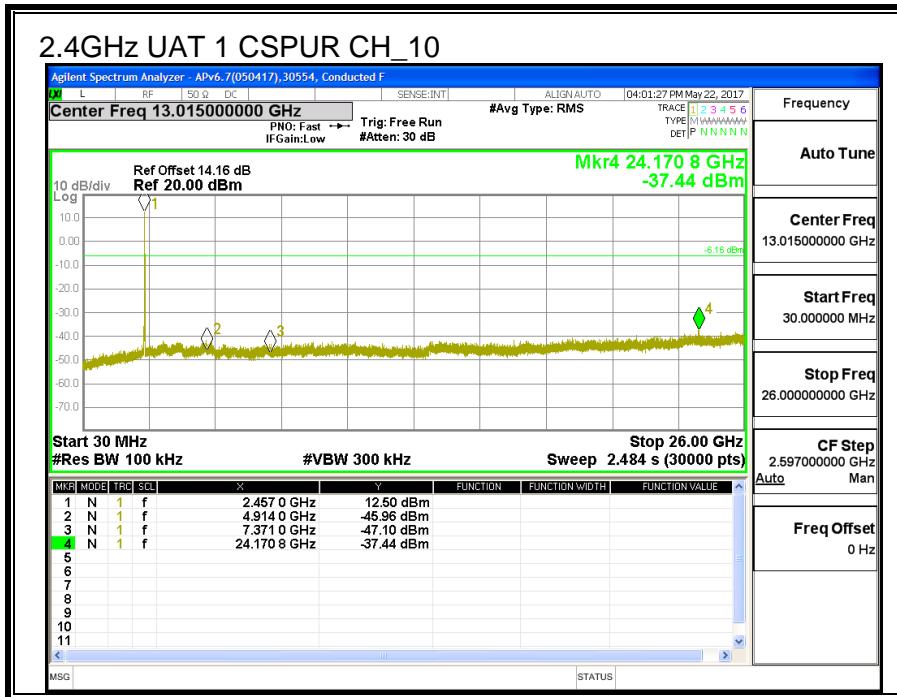

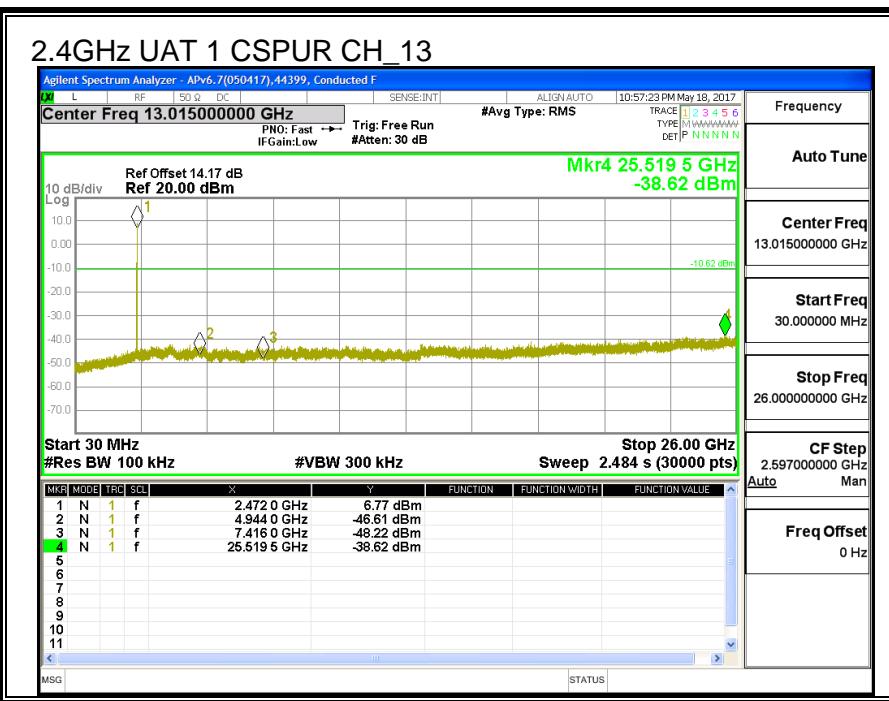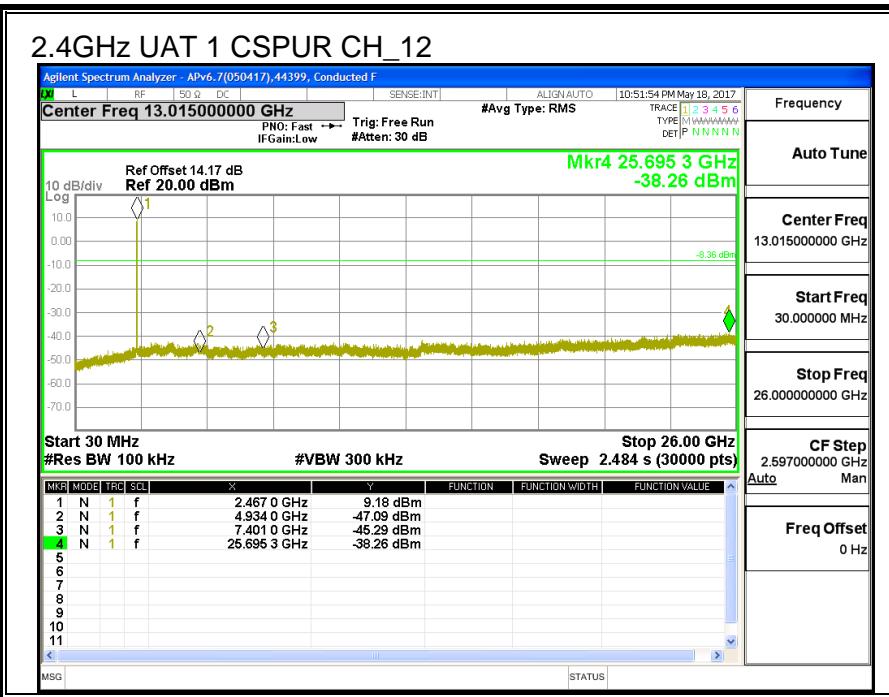

## 8.2. 11b LAT 3 SISO MODE IN THE 2.4GHz BAND

### 8.2.1. 6 dB BANDWIDTH

#### LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (a)



The minimum 6 dB bandwidth shall be at least 500 kHz.


#### RESULTS

Channel	Frequency	6 dB BW LAT 3 (MHz)	Minimum Limit (MHz)
Low_1	2412	7.60	0.5
Low_2	2417	7.60	0.5
Middle_6	2437	8.60	0.5
High_10	2457	8.00	0.5
High_11	2462	7.52	0.5
High_12	2467	8.52	0.5
High_13	2472	7.52	0.5

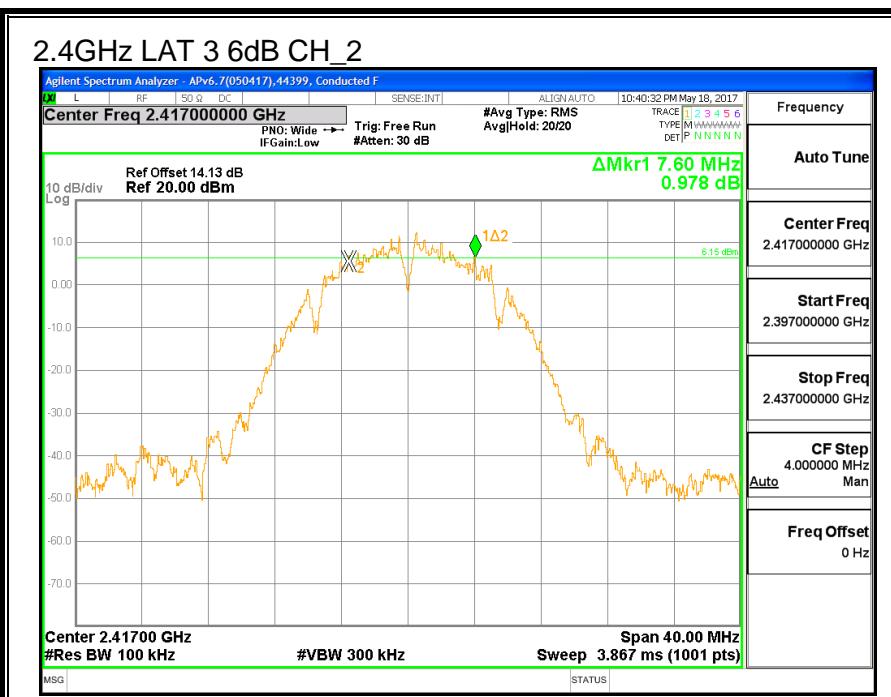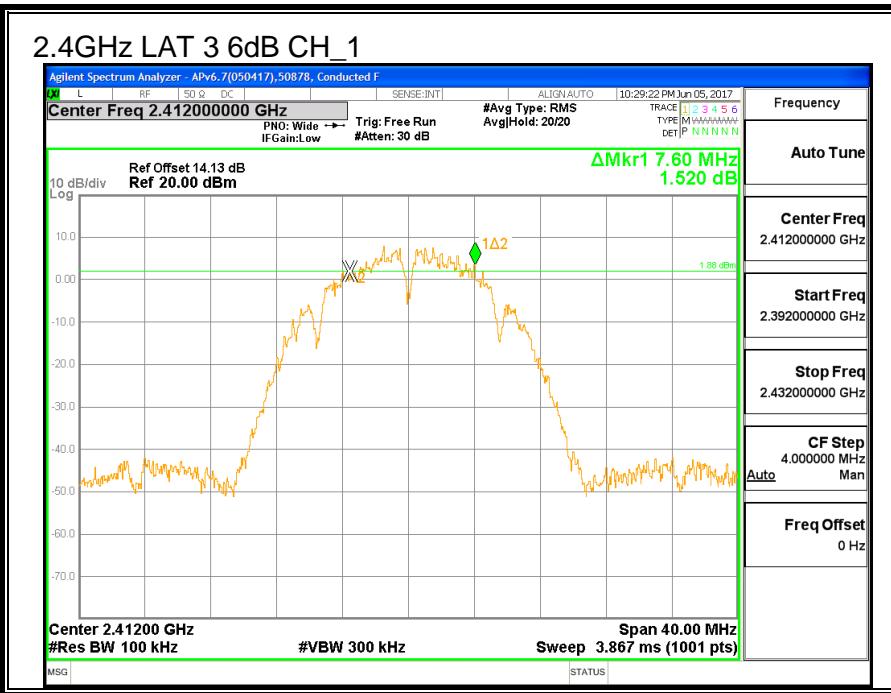

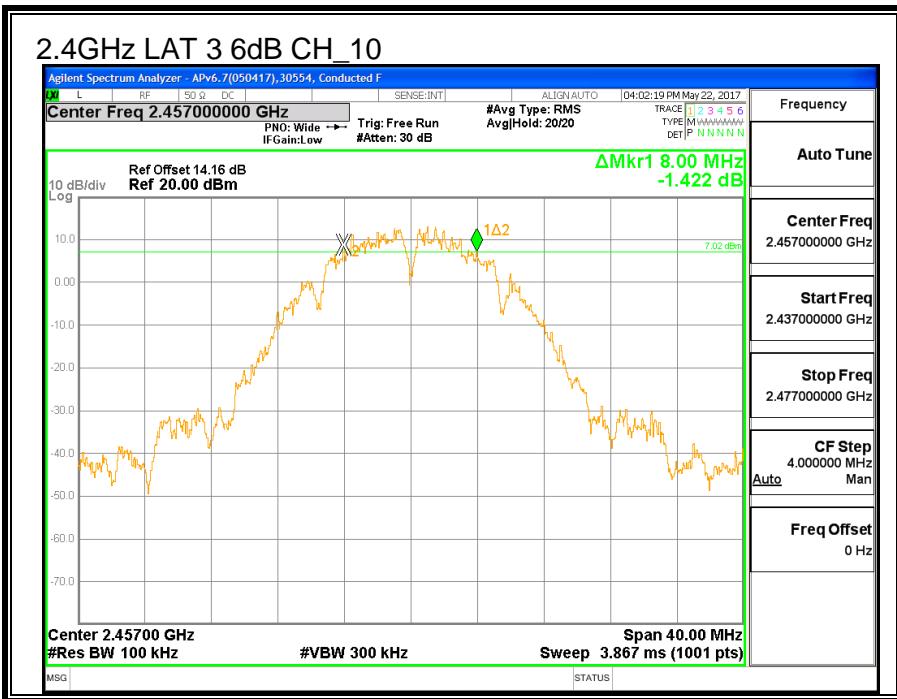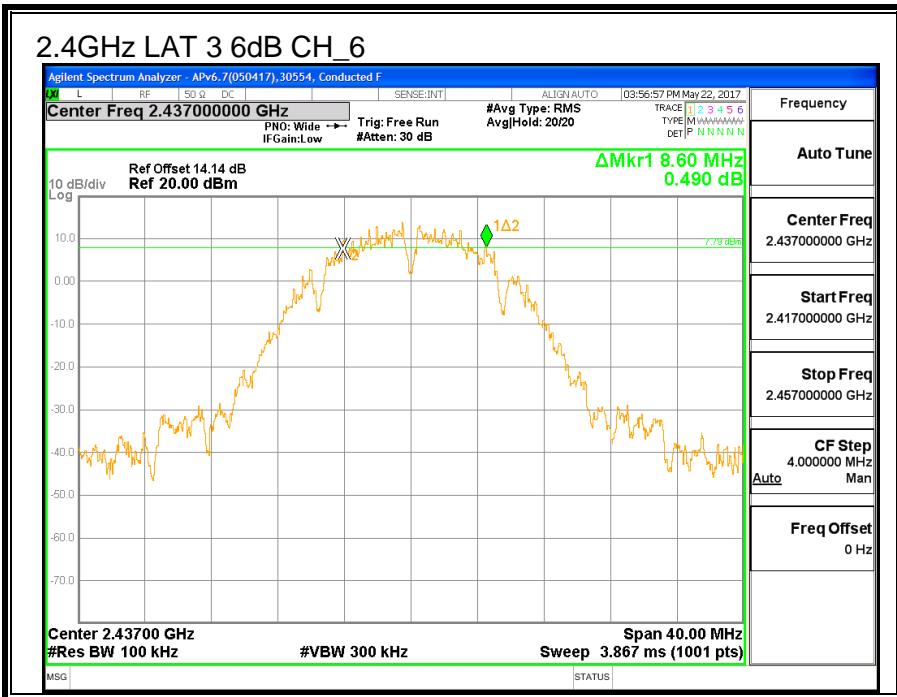

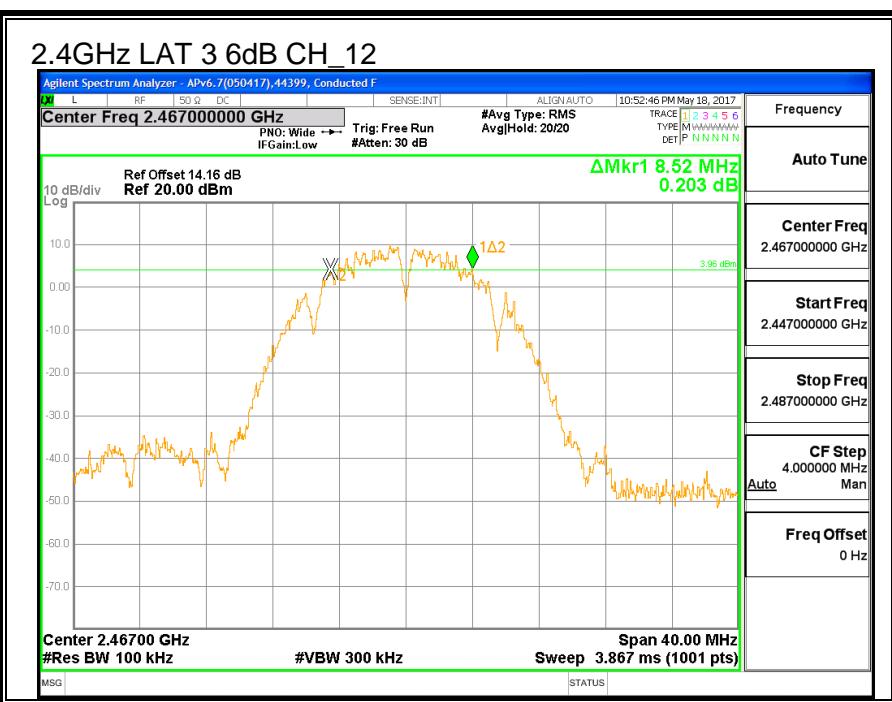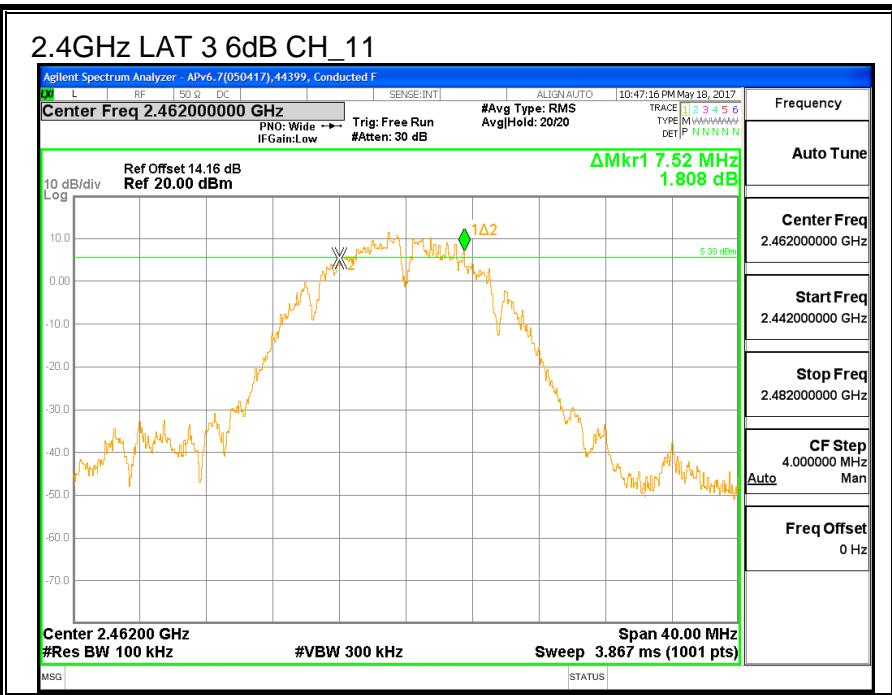

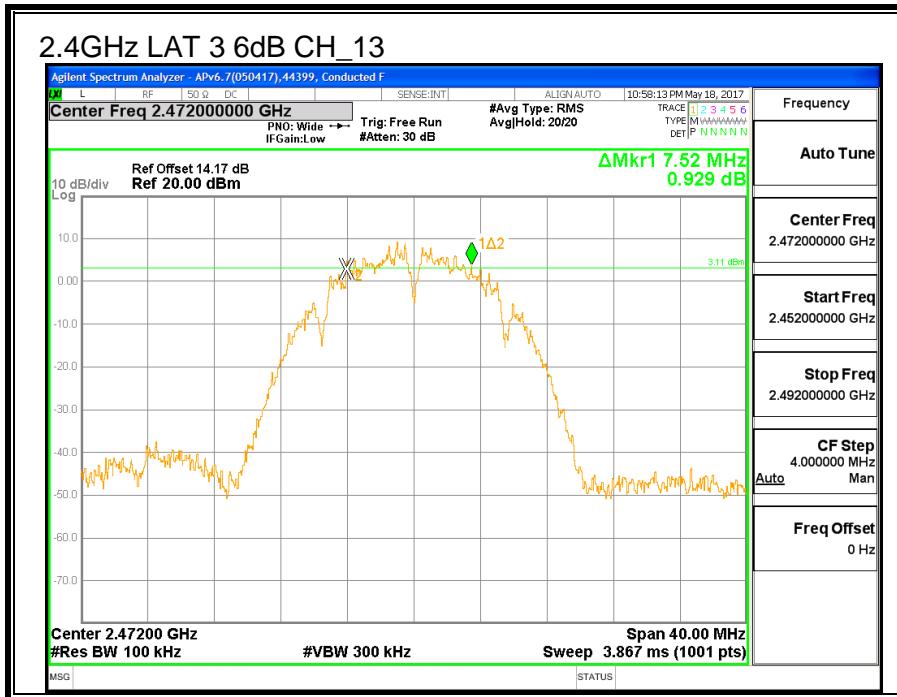



### 8.2.2. 99% BANDWIDTH



#### LIMITS



None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth LAT 3 (MHz)
Low_1	2412	11.926
Low_2	2417	12.503
Middle_6	2437	13.312
High_10	2457	13.151
High_11	2462	12.474
High_12	2467	12.676
High_13	2472	12.493

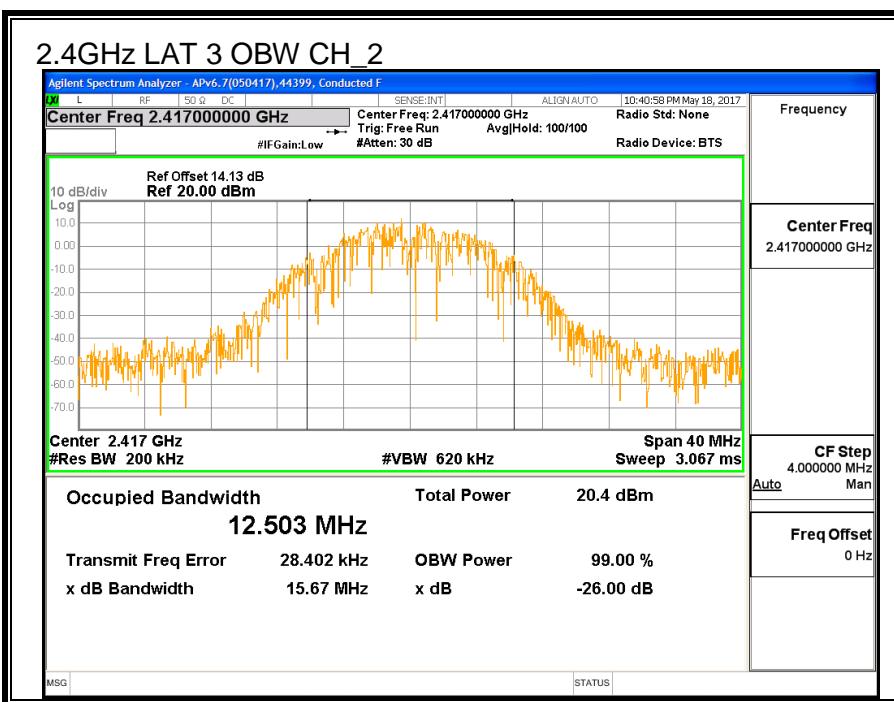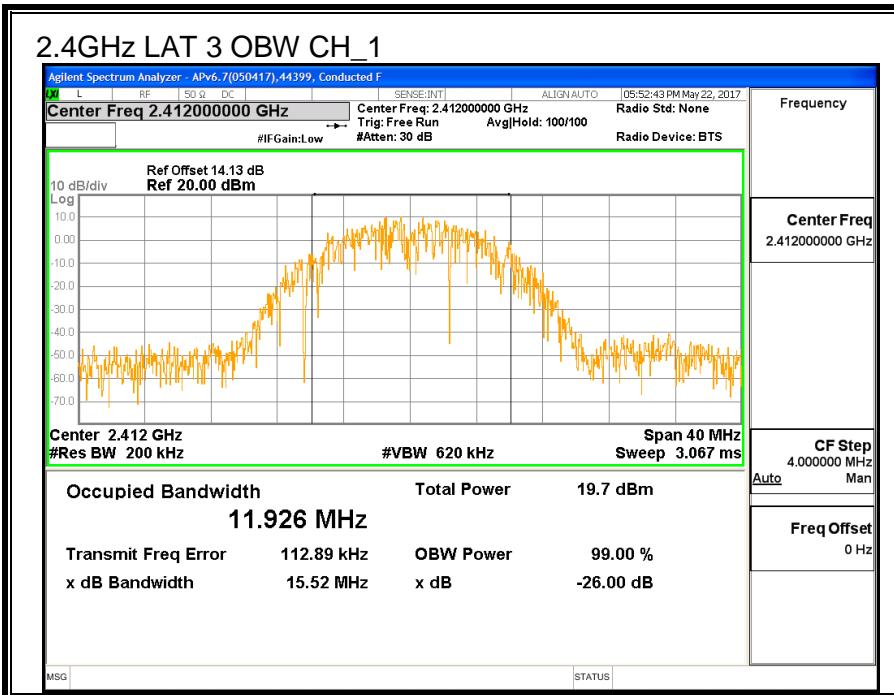

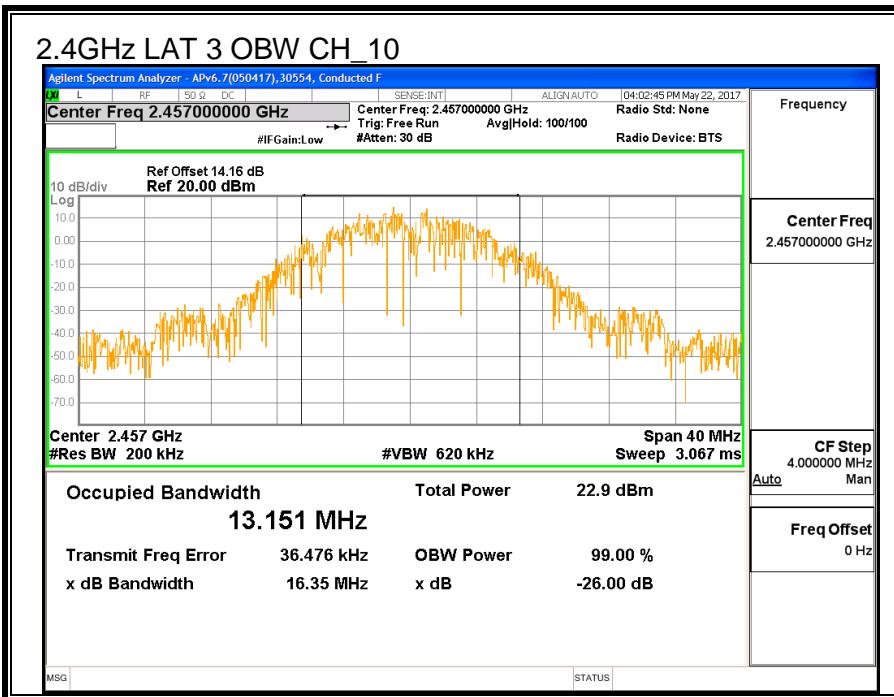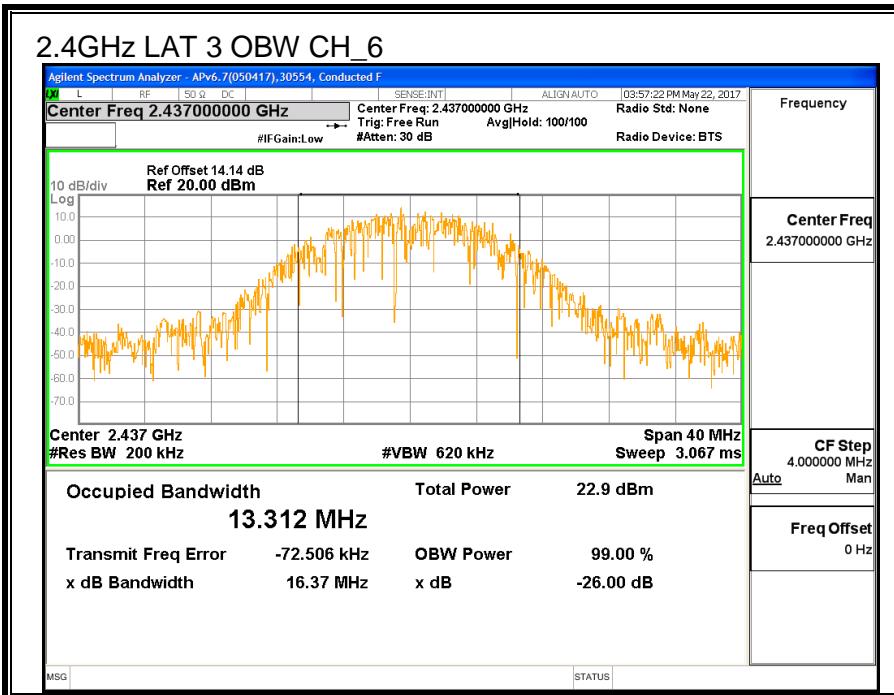

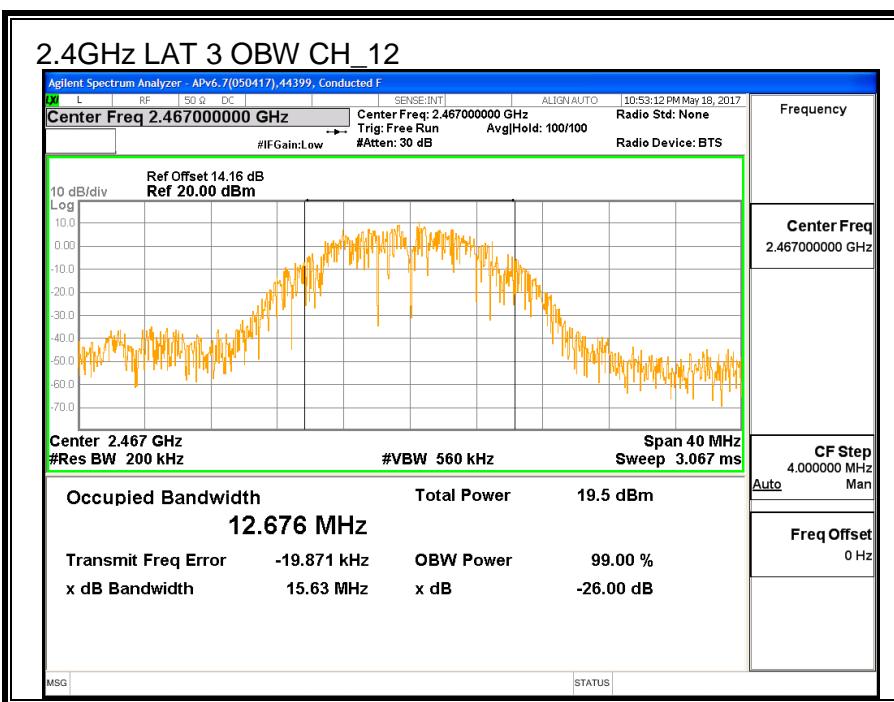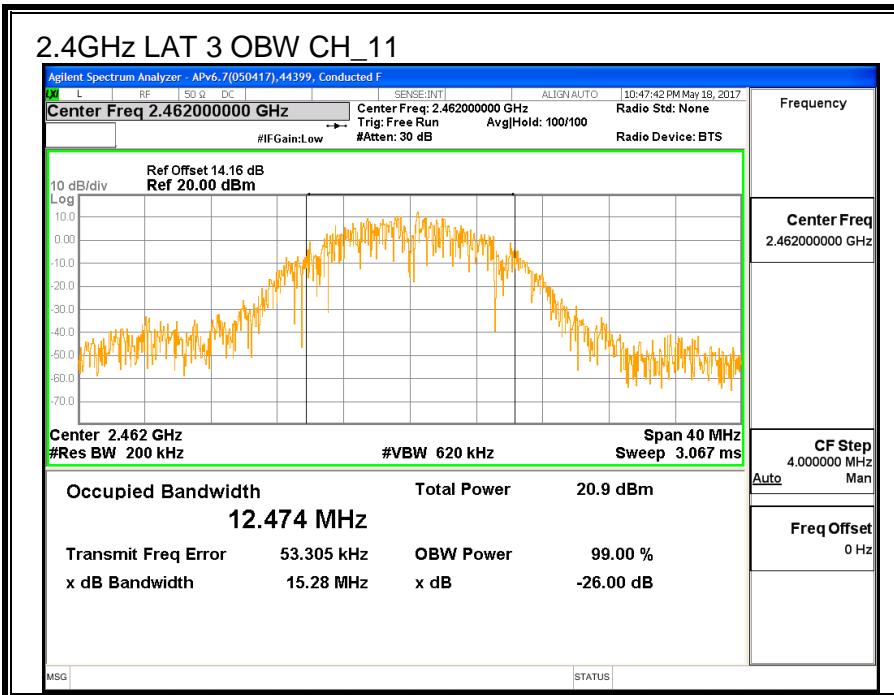

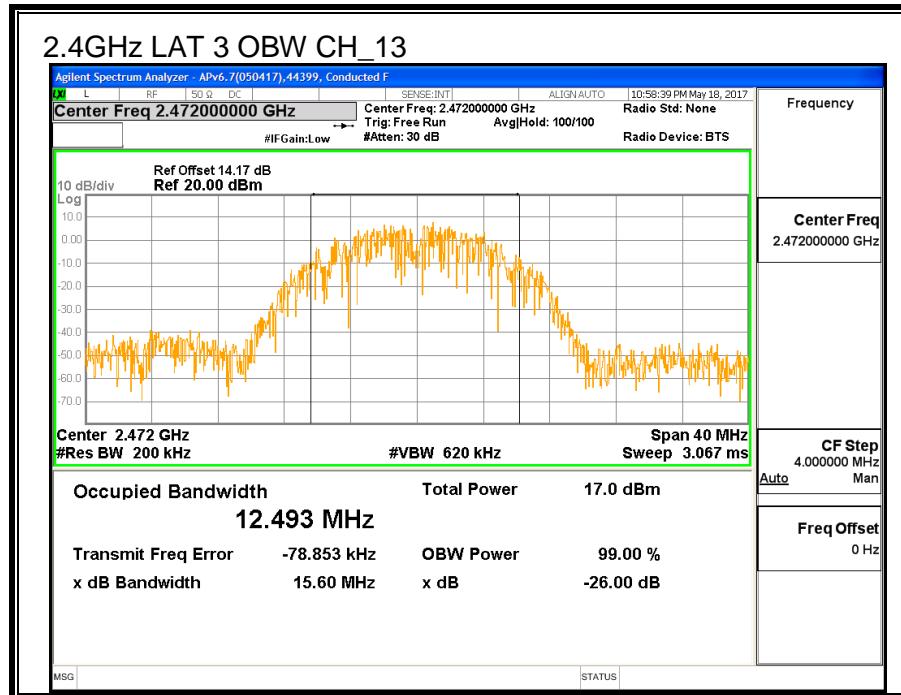

### 8.2.3. AVERAGE POWER

ID:	30554	Date:	8/1/17
-----	-------	-------	--------

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power LAT 3 (MHz)
Low_1	2412	20.44
Low_2	2417	21.87
Middle_6	2437	21.92
High_10	2457	21.90
High_11	2462	21.94
High_12	2467	20.41
High_13	2472	18.93

#### 8.2.4. OUTPUT POWER

<b>ID:</b>	30554	<b>Date:</b>	8/1/17
------------	-------	--------------	--------

#### LIMITS

FCC §15.247

IC RSS-247 (5.4) (d)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	-4.42	30.00	30	36	30.00
Low_2	2417	-4.42	30.00	30	36	30.00
Mid_6	2437	-4.42	30.00	30	36	30.00
High_10	2457	-4.42	30.00	30	36	30.00
High_11	2462	-4.42	30.00	30	36	30.00
High_12	2467	-4.42	30.00	30	36	30.00
High_13	2472	-4.42	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

### Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	23.63	23.63	30.00	-6.37
Low_2	2417	25.25	25.25	30.00	-4.75
Mid_6	2437	25.15	25.15	30.00	-4.85
High_10	2457	25.29	25.29	30.00	-4.71
High_11	2462	25.31	25.31	30.00	-4.69
High_12	2467	23.61	23.61	30.00	-6.39
High_13	2472	22.28	22.28	30.00	-7.72

### 8.2.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247

IC RSS-247 (5.2) (b)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



#### RESULTS



Duty Cycle CF (dB)	0	Included in Calculatio ns of Corr'd PSD
-----------------------	---	--


Results

Channel	Frequency (MHz)	Meas PSD (dBm/3KHz)	Total Corr'd Power (dBm/3KHz)	Limit (dBm/3KHz)	Margin (dB)
Low_1	2412	-2.63	-2.63	8	-10.629
Low_2	2417	-1.98	-1.98	8	-9.98
Middle_6	2437	0.05	0.05	8	-7.95
High_10	2457	0.81	0.81	8	-7.189
High_11	2462	-1.85	-1.85	8	-9.85
High_12	2467	-2.21	-2.21	8	-10.21
High_13	2472	-4.83	-4.83	8	-12.83

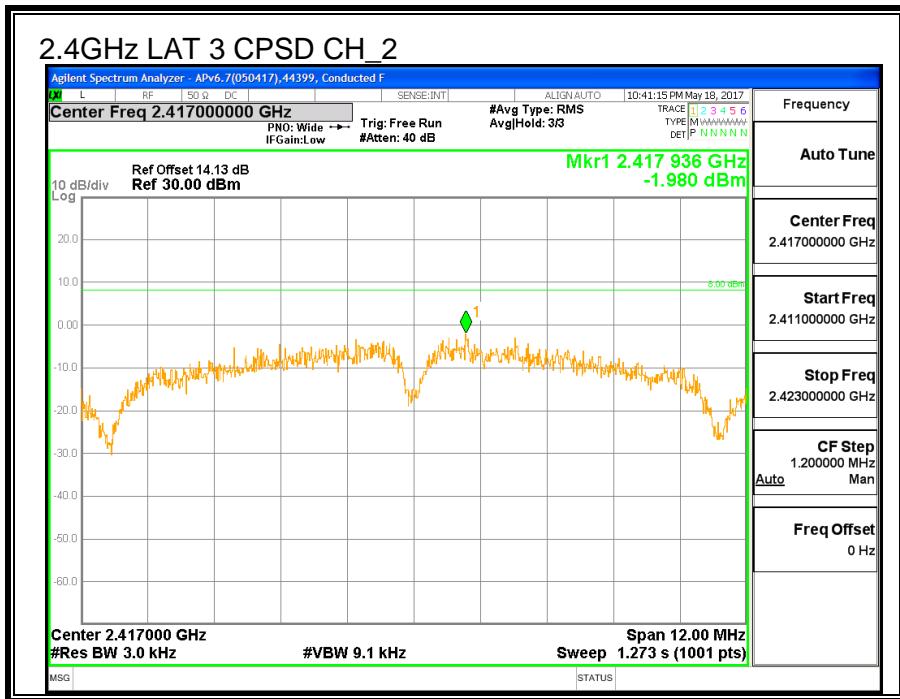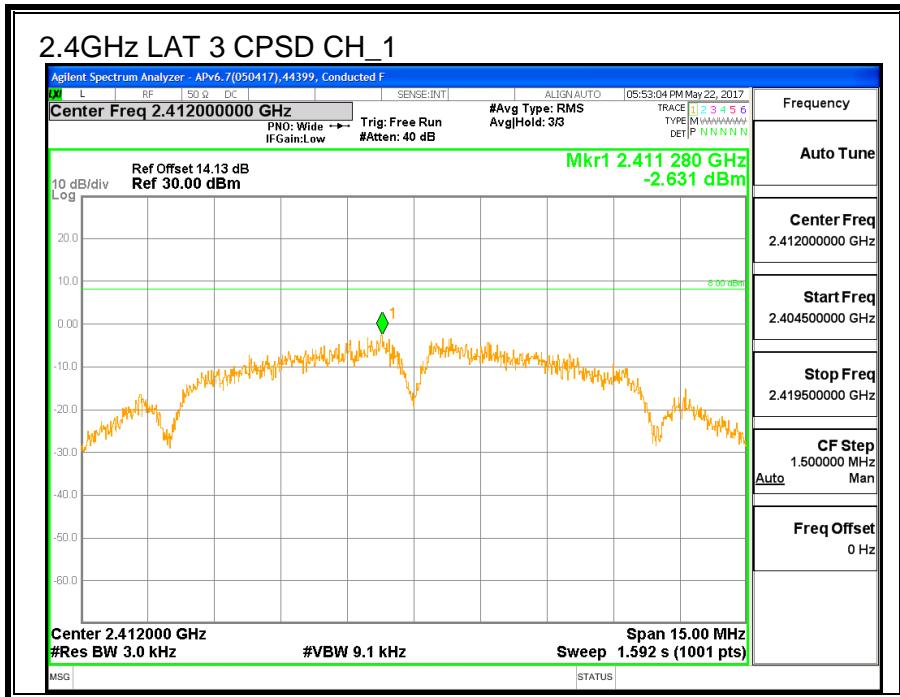

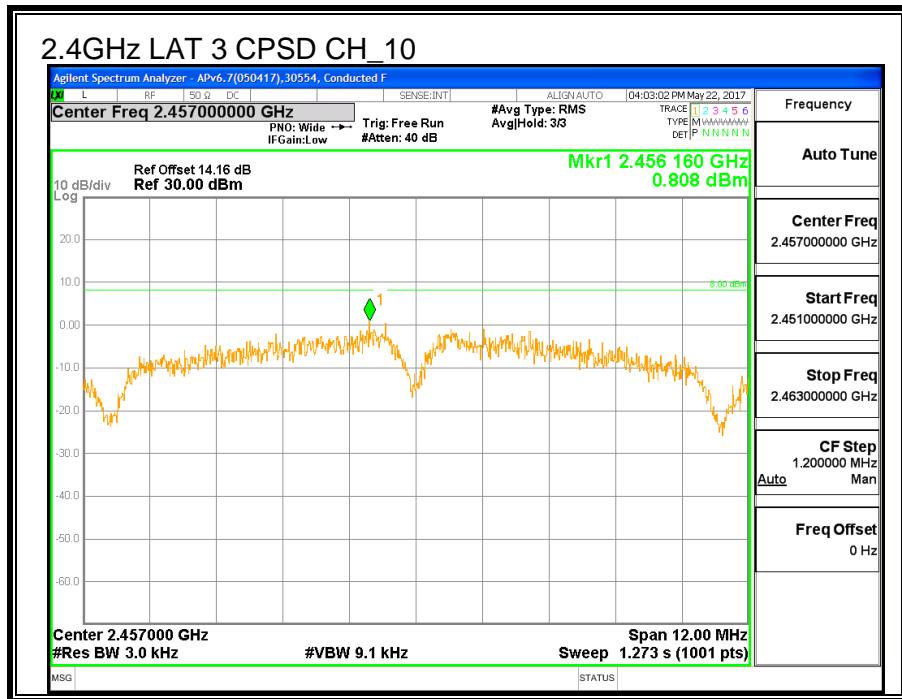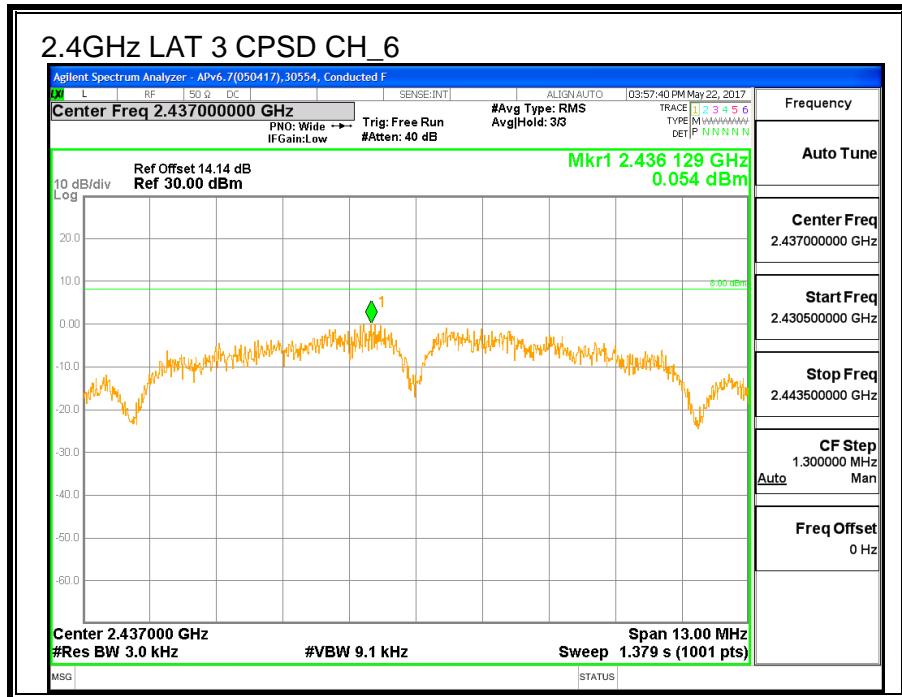

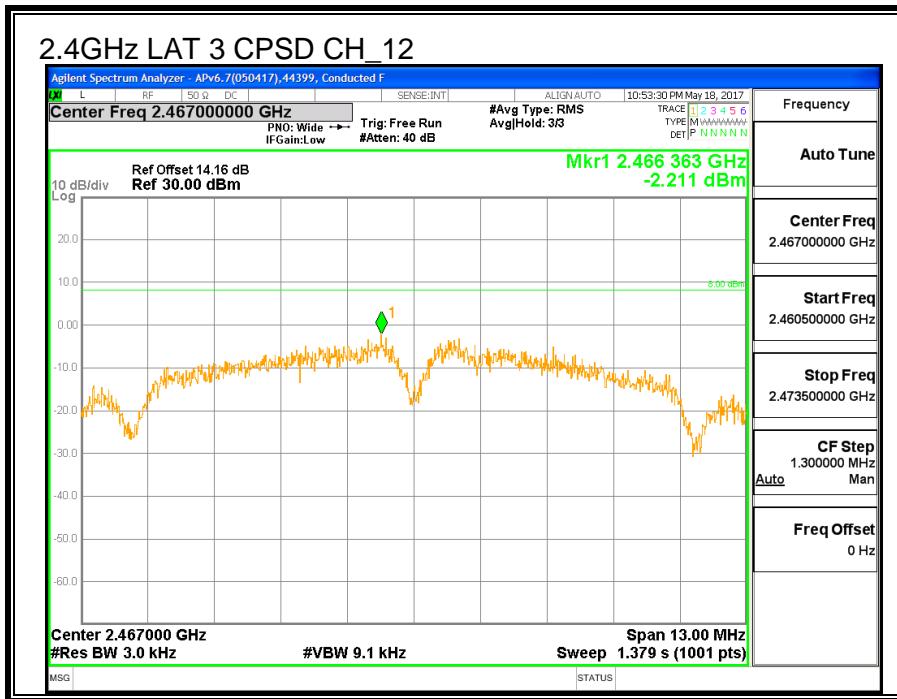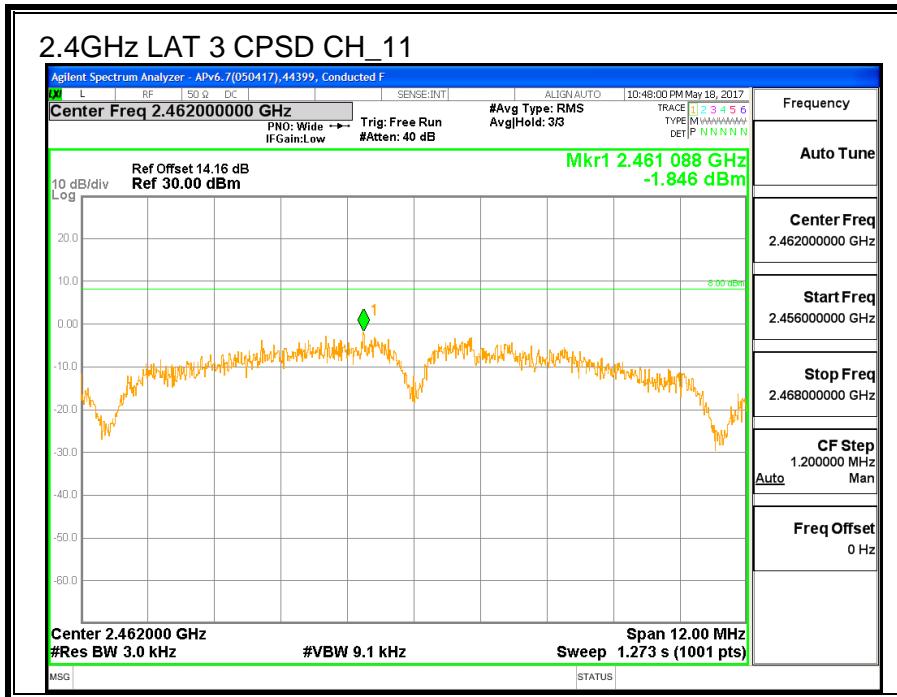

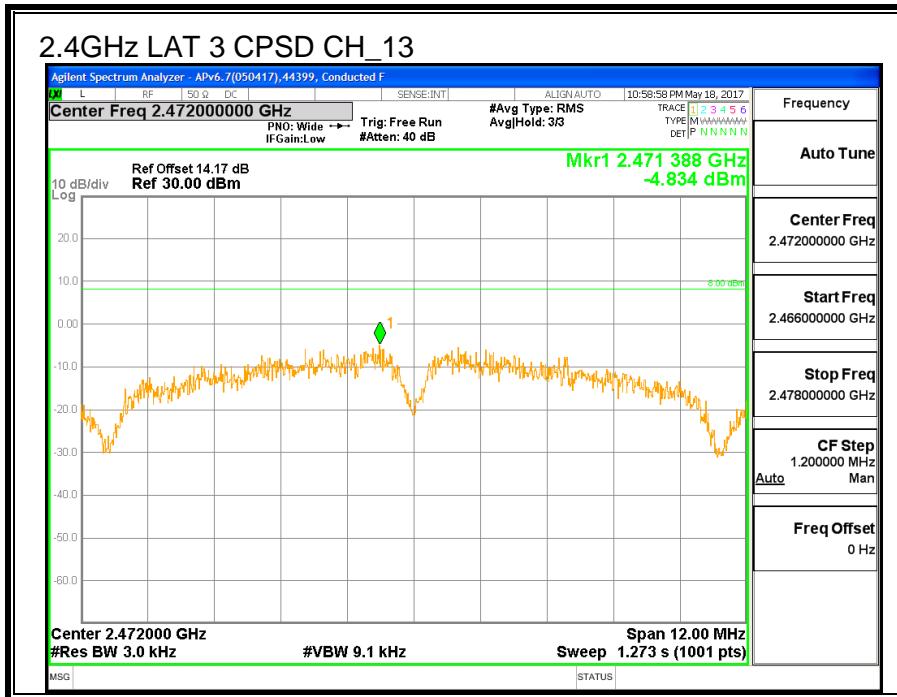

## 8.2.6. CONDUCTED BANDEdge AND SPURIOUS EMISSIONS



### LIMITS



FCC §15.247 (d)



IC RSS-247 (5.5)



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.



**CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS**

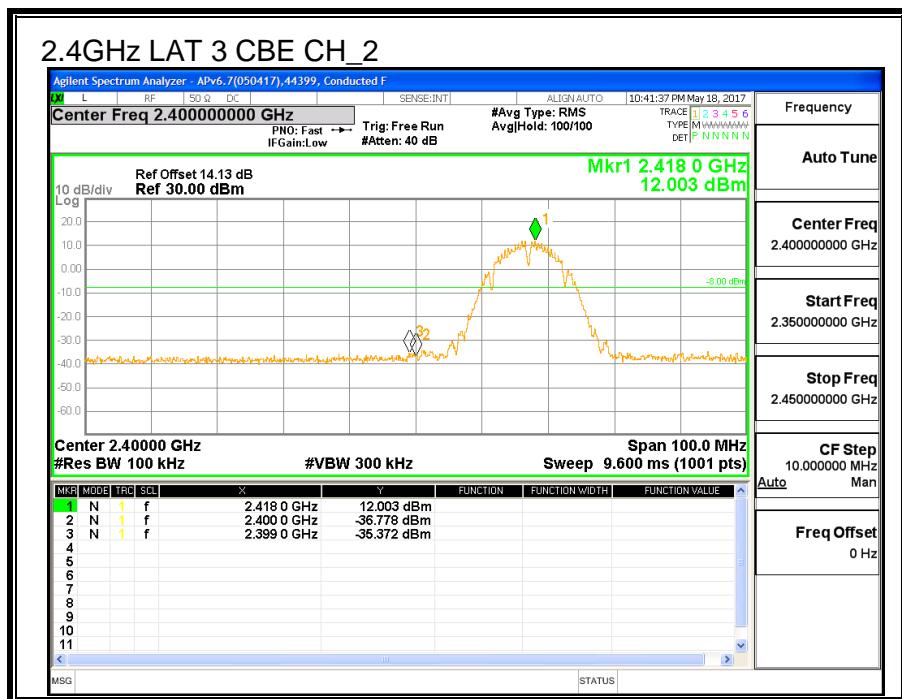
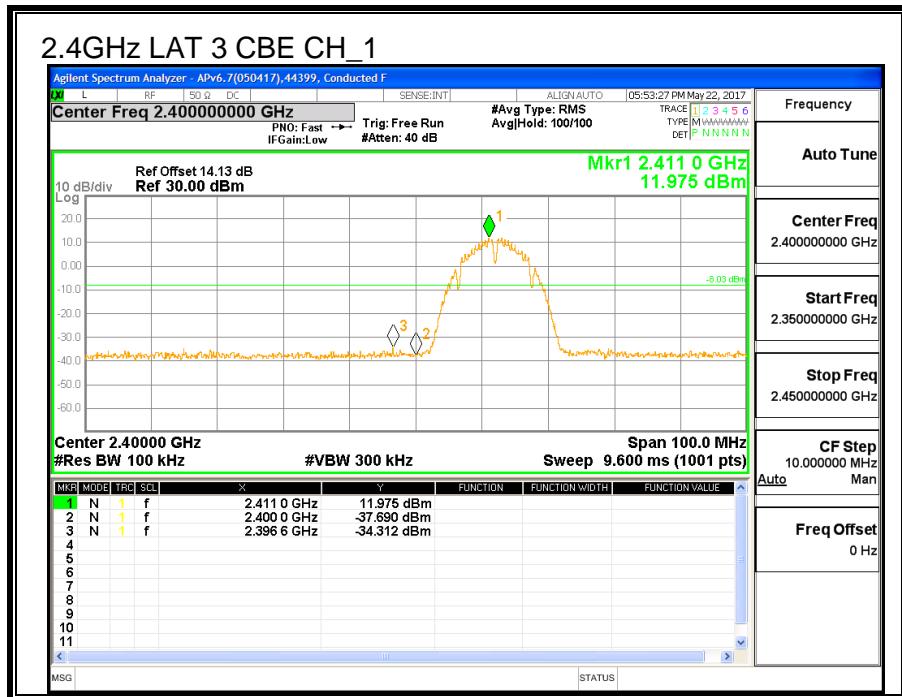


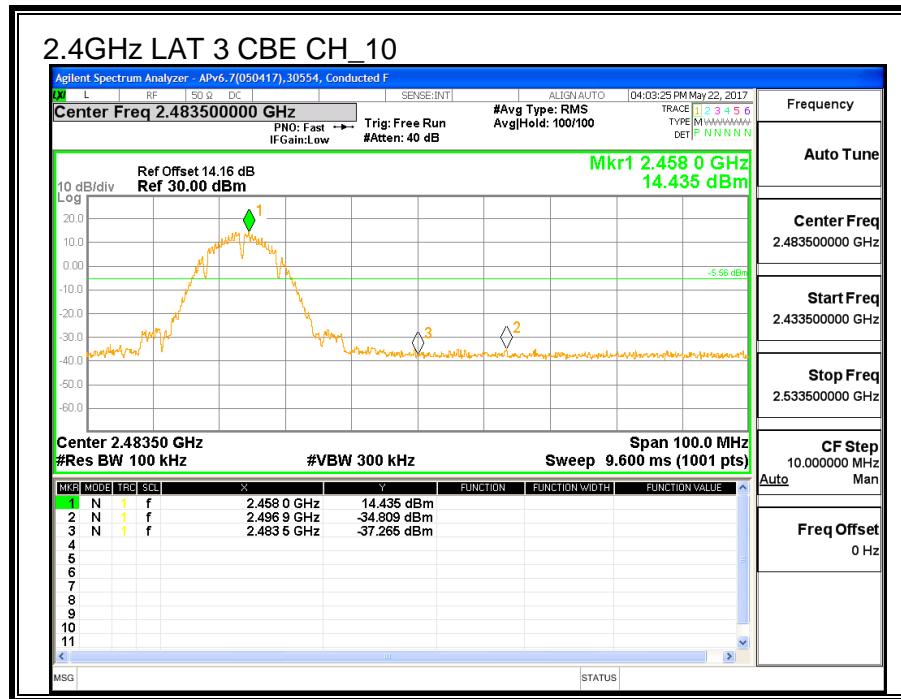
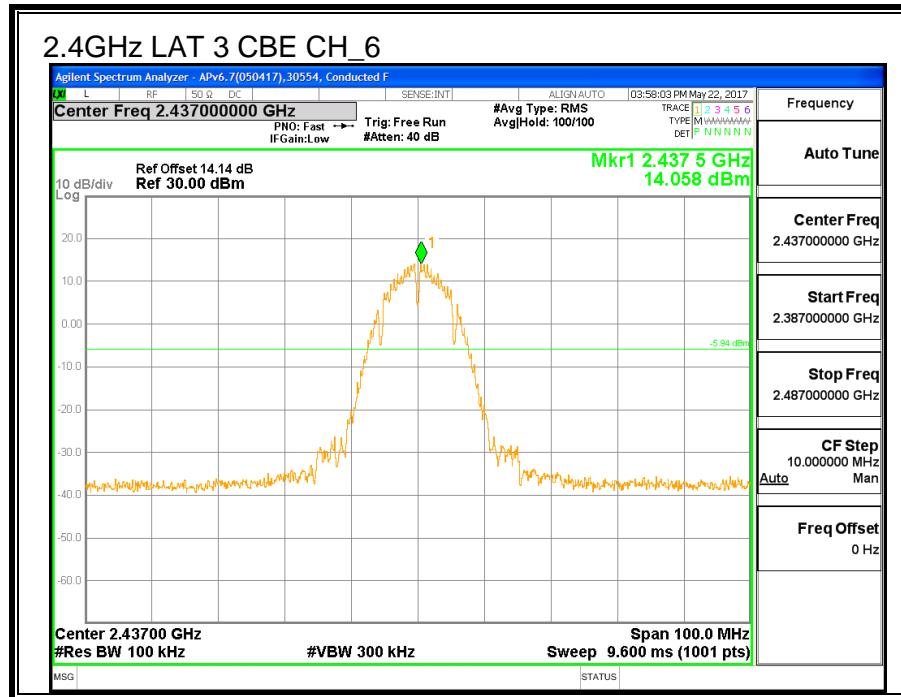


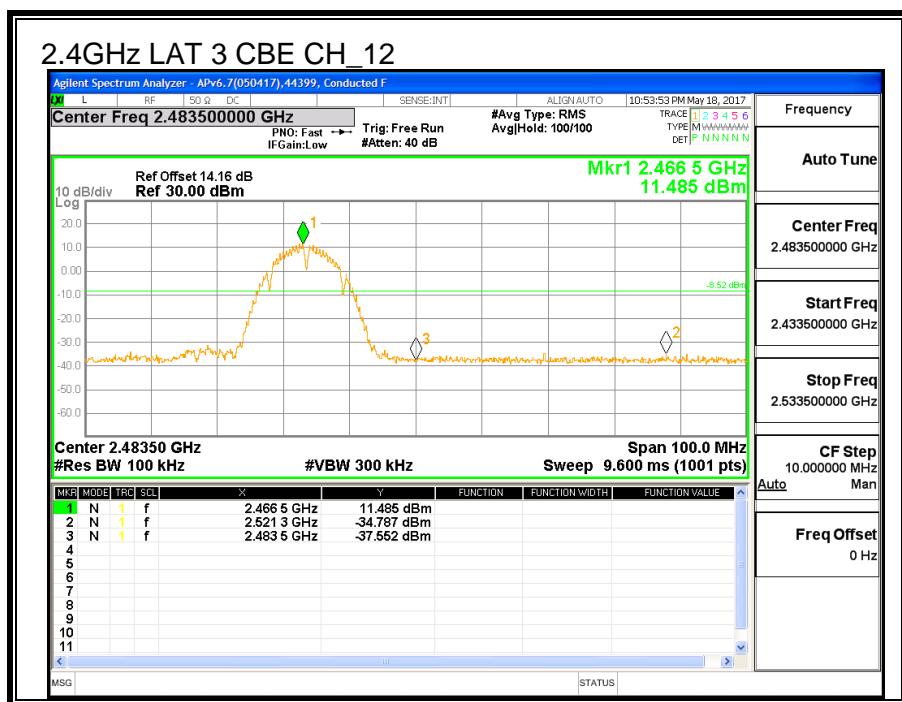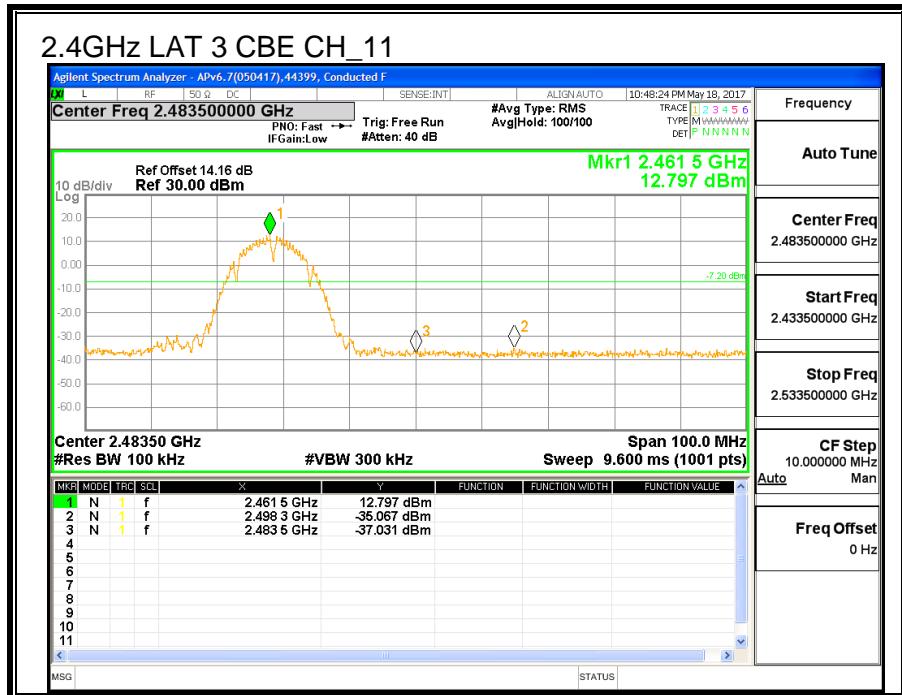

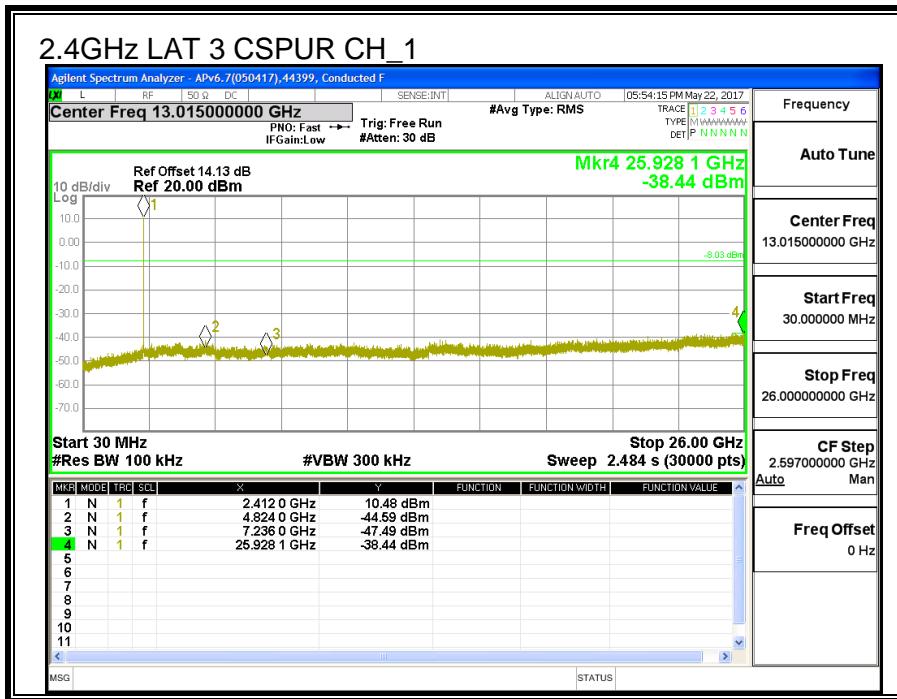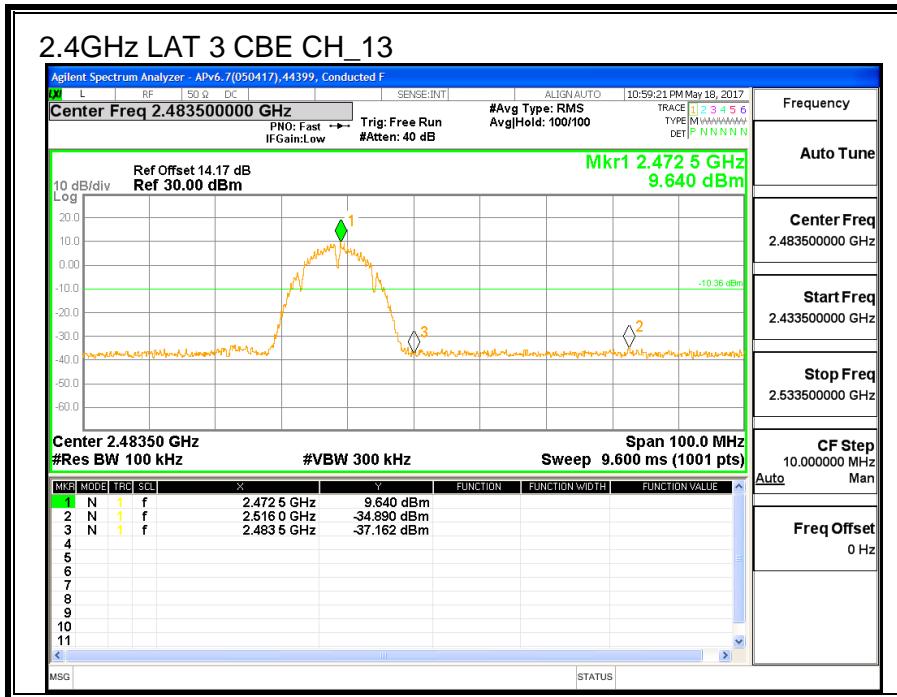

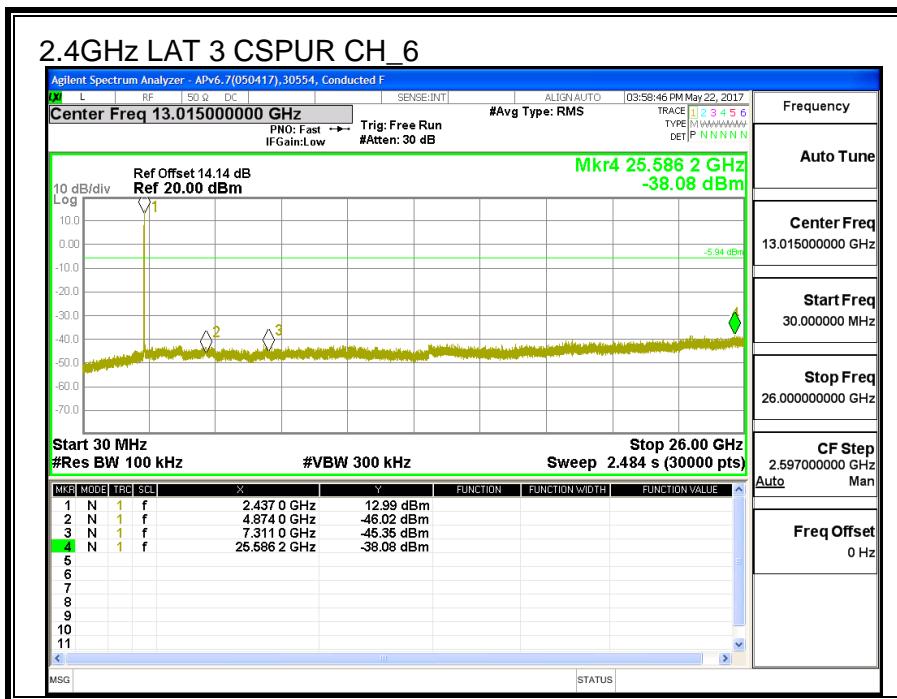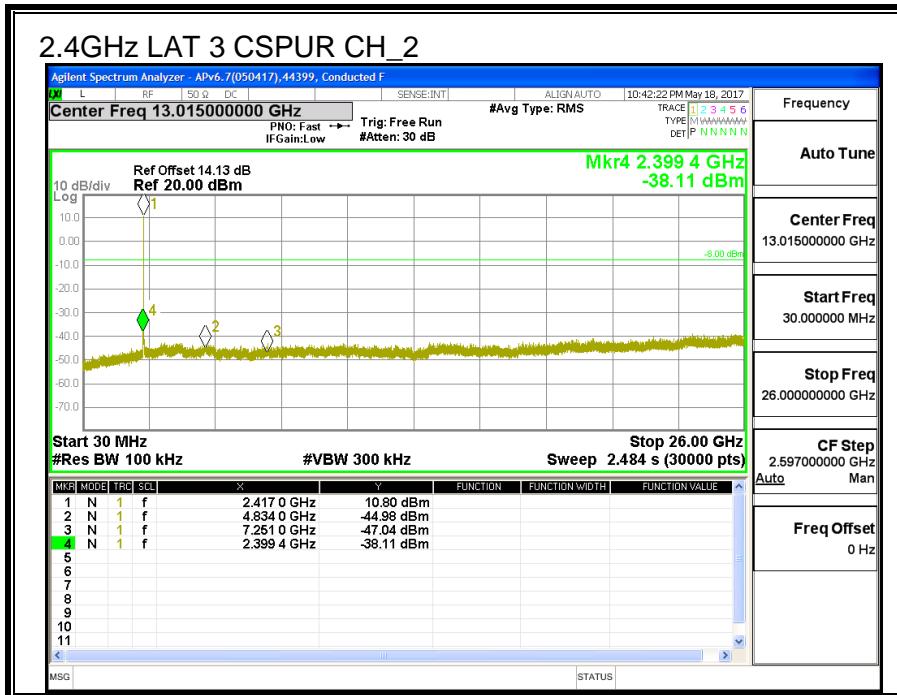

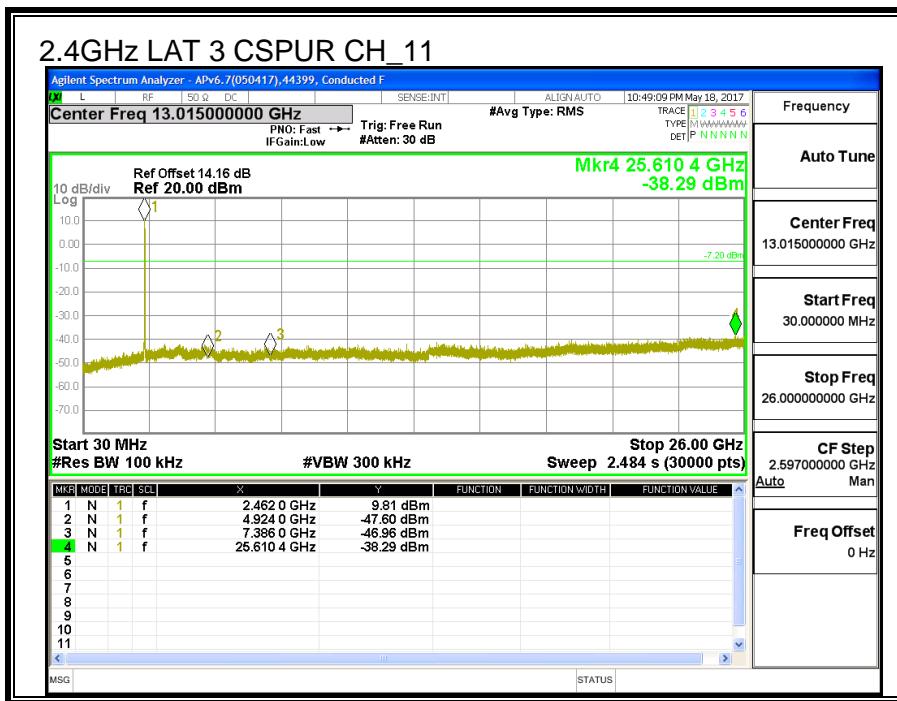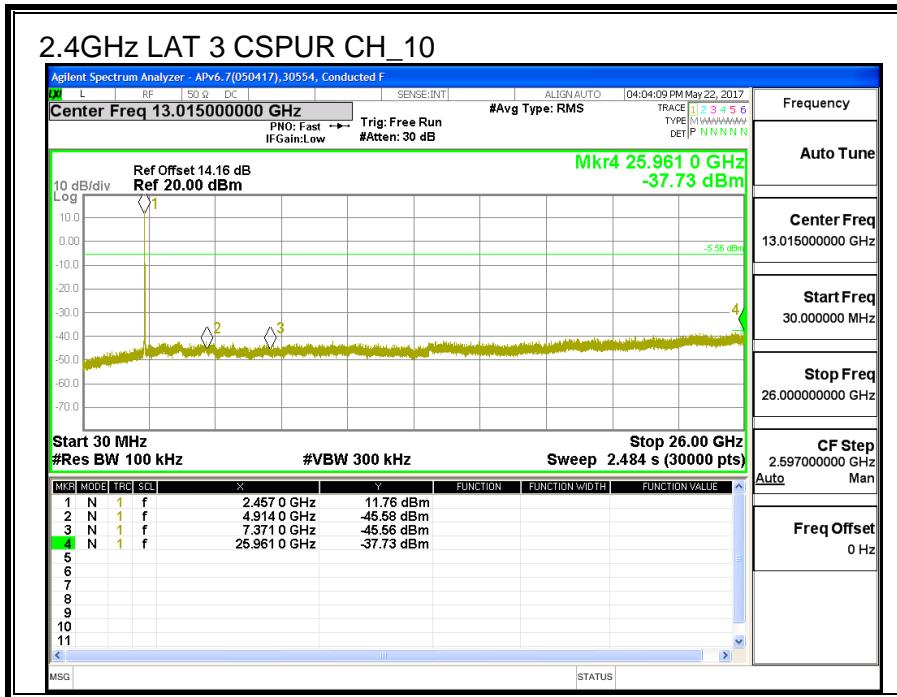

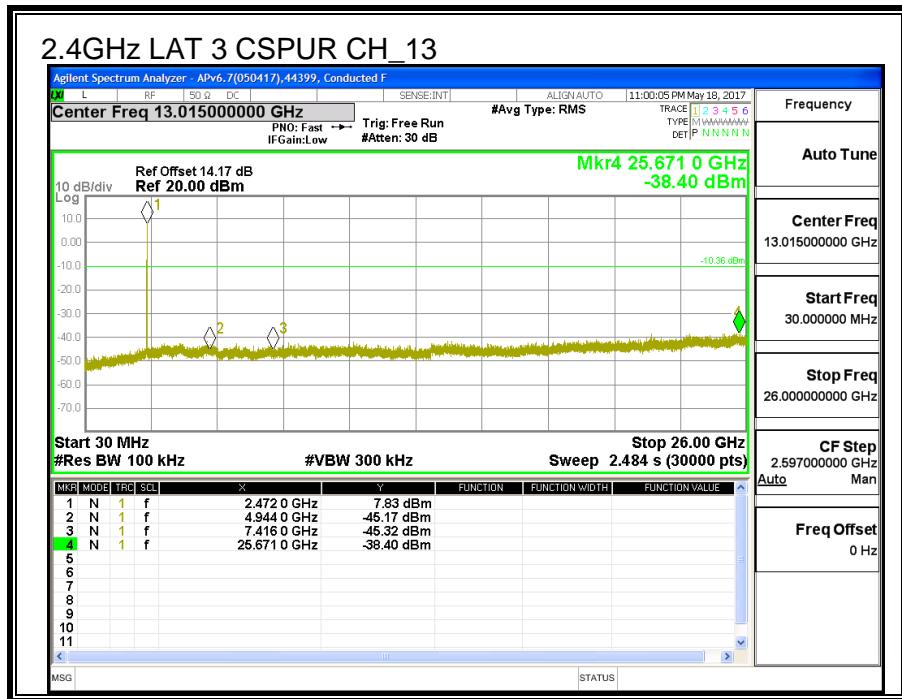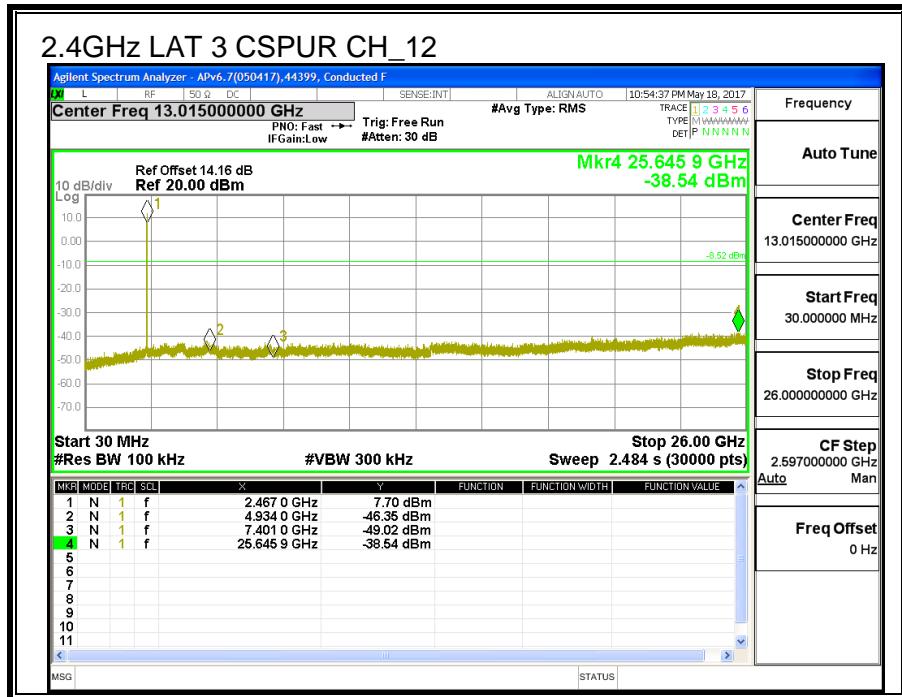

### 8.3. 11n HT20 UAT 1 SISO MODE IN THE 2.4GHz BAND

#### 8.3.1. 6 dB BANDWIDTH

##### LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (a)



The minimum 6 dB bandwidth shall be at least 500 kHz.



##### RESULTS



Channel	Frequency	6 dB BW UAT 1 (MHz)	Minimum Limit (MHz)
Low_1	2412	16.08	0.5
Low_2	2417	16.00	0.5
Low_3	2422	16.92	0.5
Low_4	2427	17.64	0.5
Middle_6	2437	17.56	0.5
High_9	2452	17.16	0.5
High_10	2457	15.24	0.5
High_11	2462	17.20	0.5
High_12	2467	17.76	0.5
High_13	2472	17.76	0.5

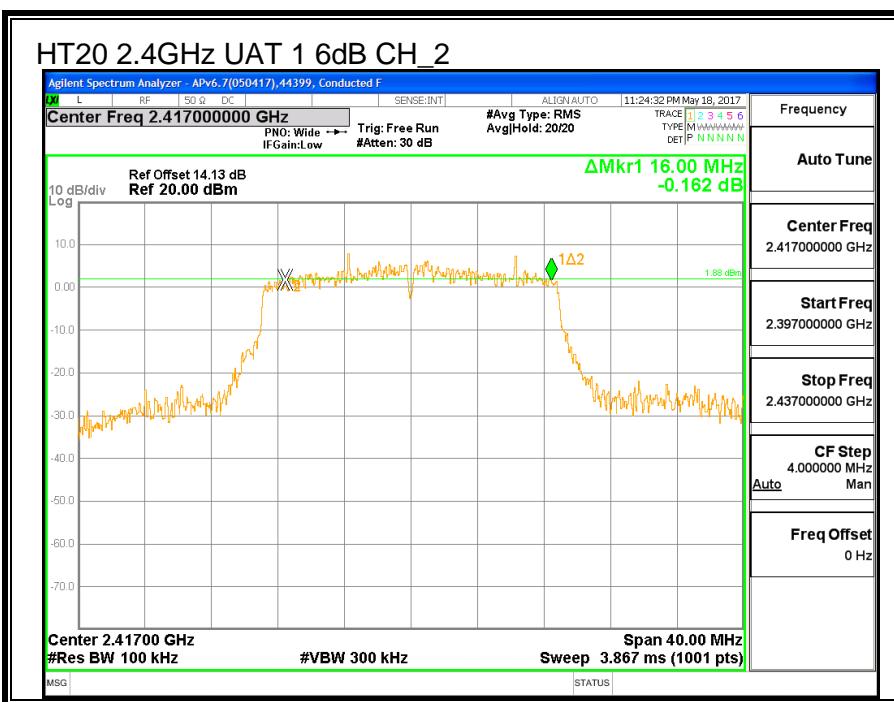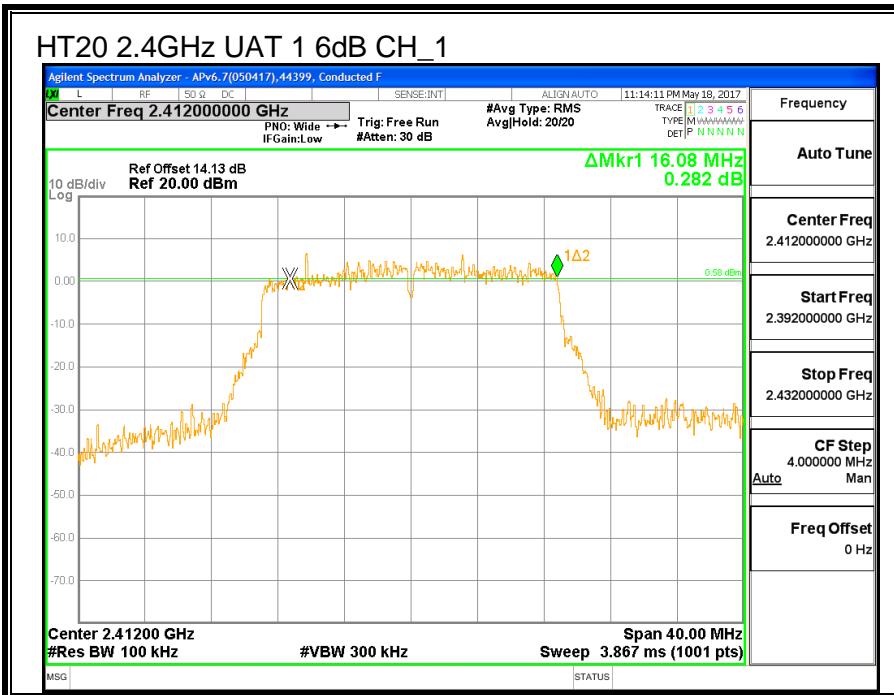

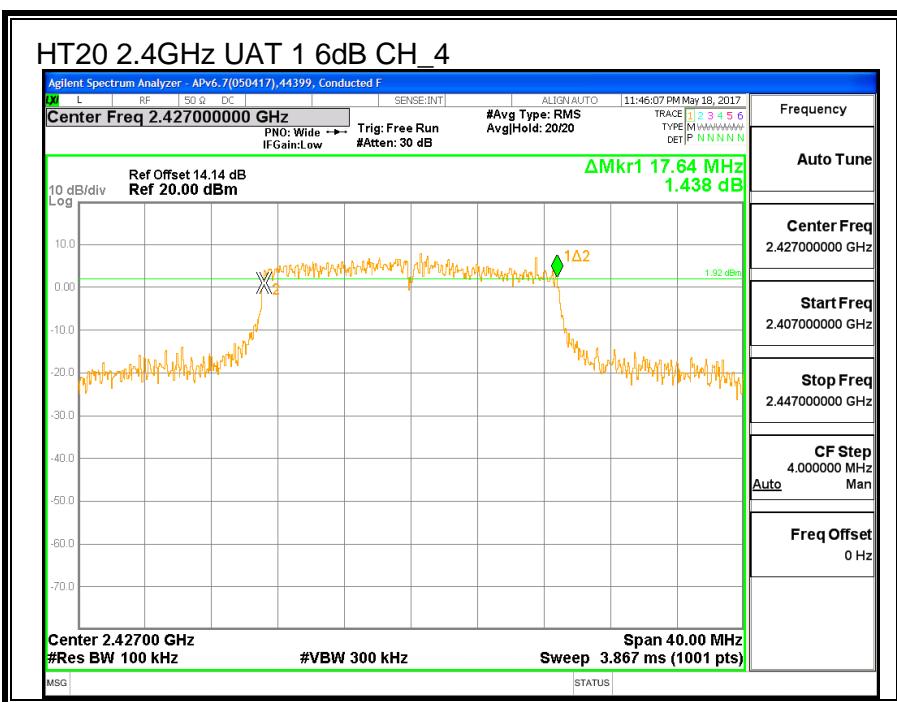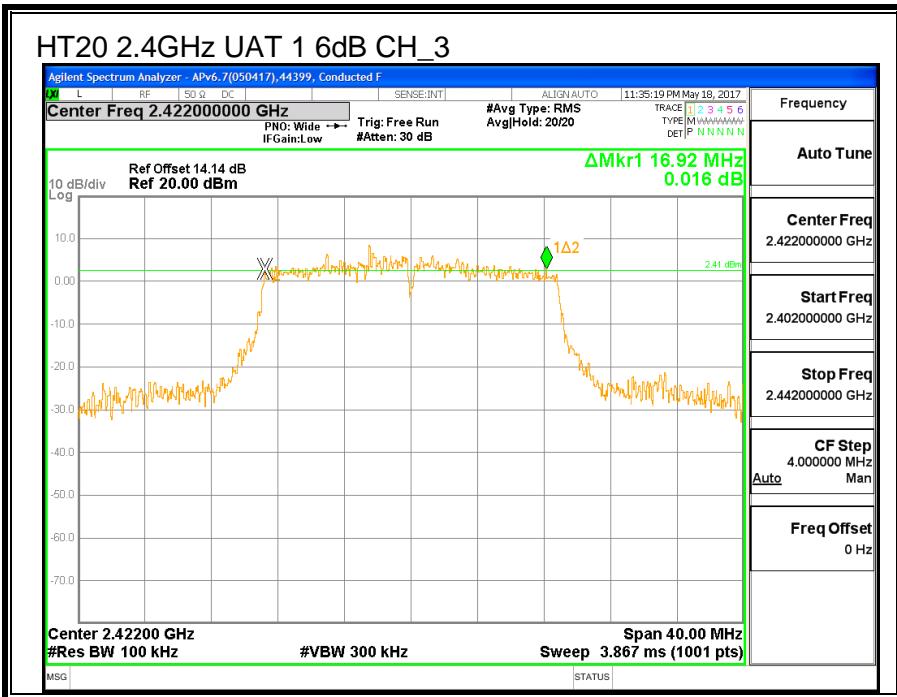

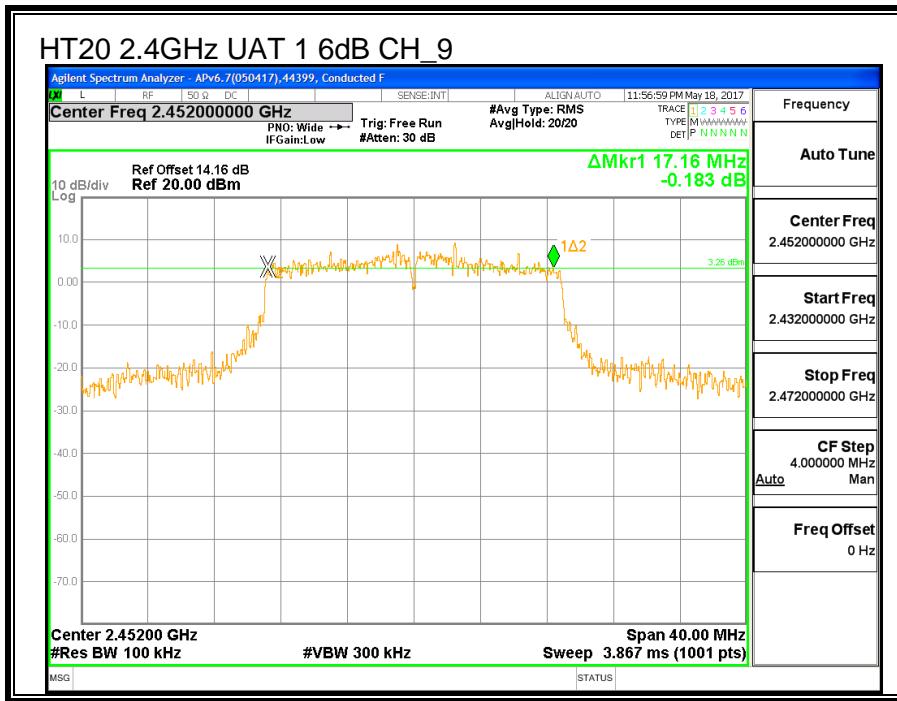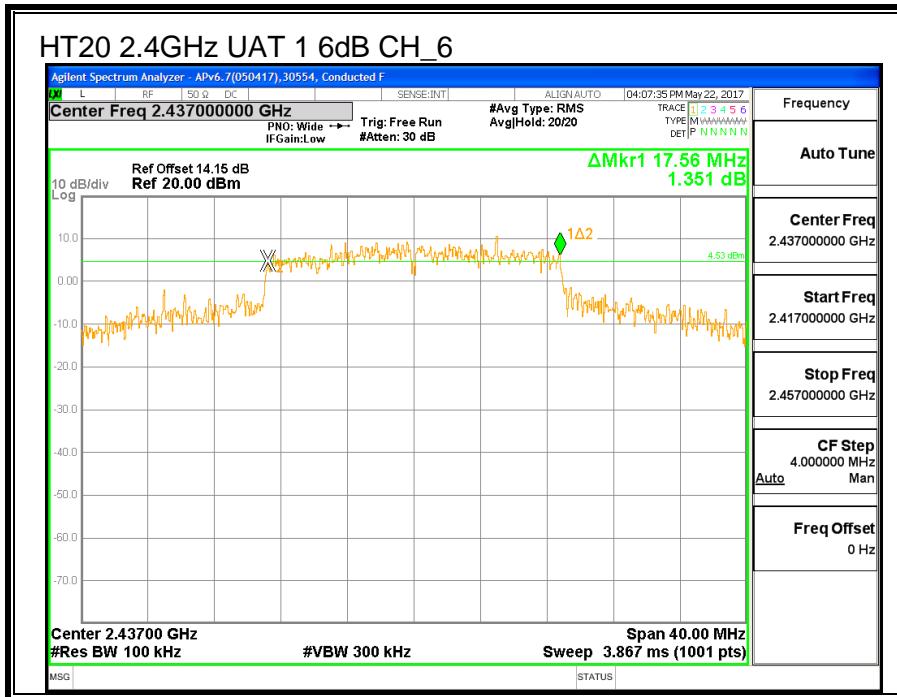

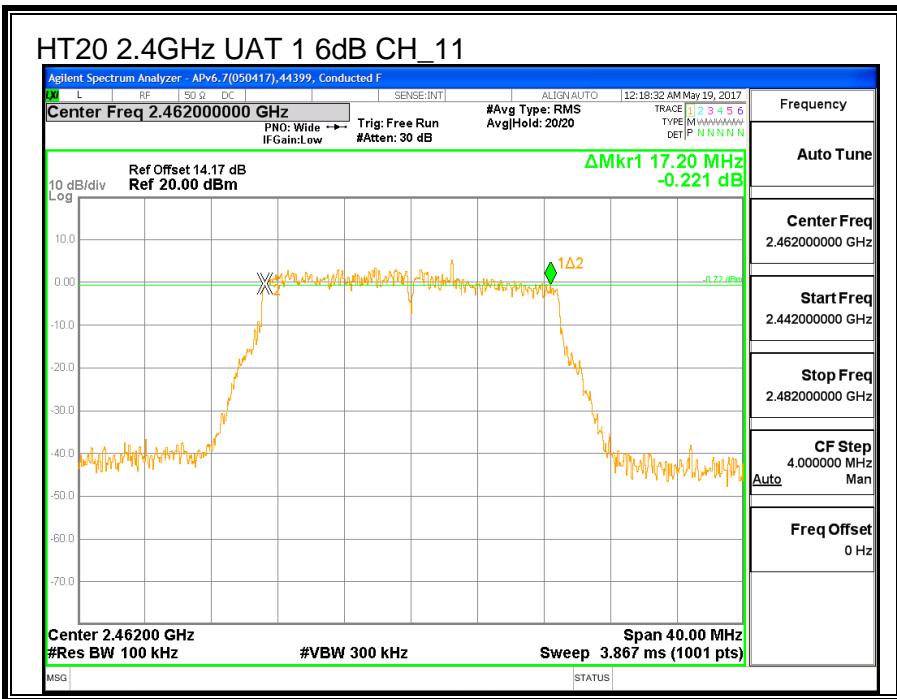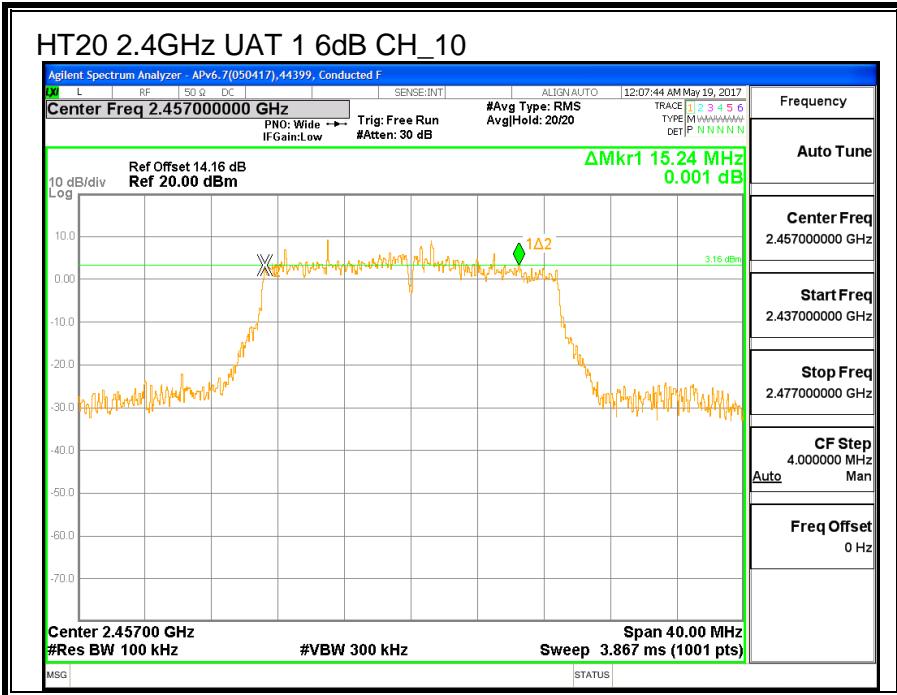

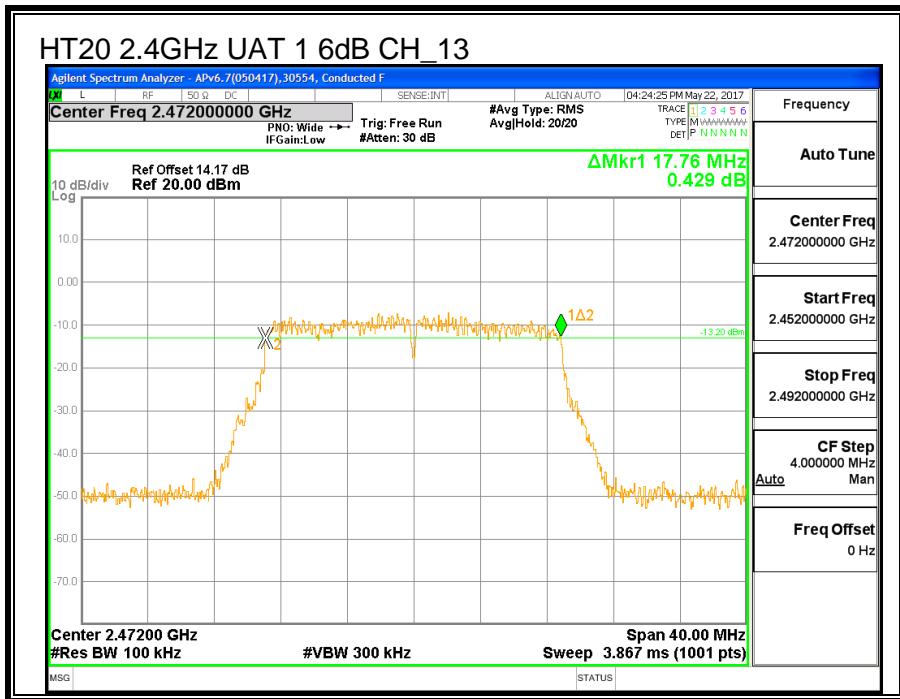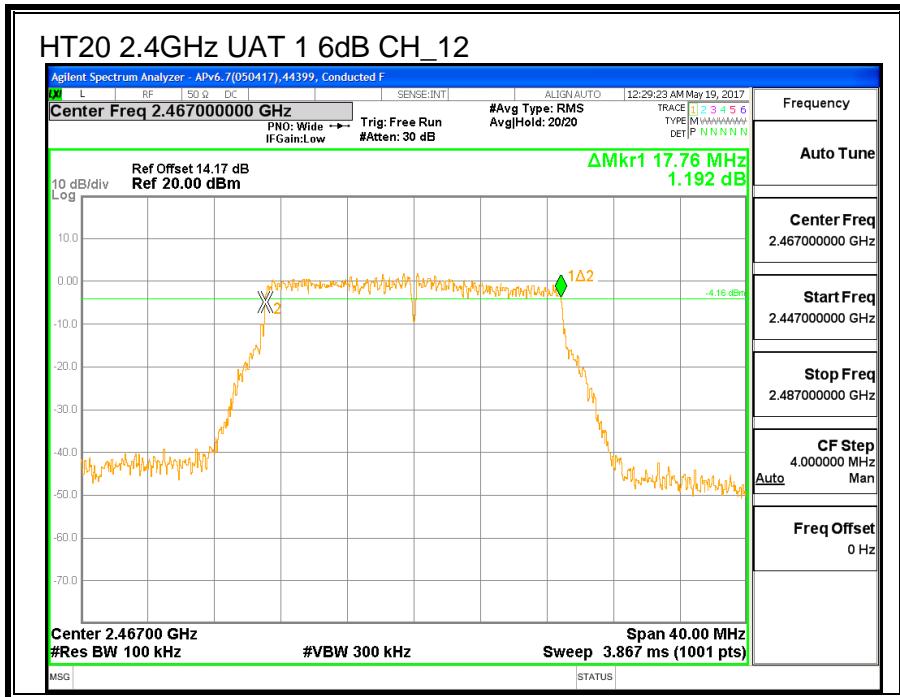



### 8.3.2. 99% BANDWIDTH



#### LIMITS



None; for reporting purposes only.



#### RESULTS



Channel	Frequency (MHz)	99% Bandwidth UAT 1 (MHz)
Low_1	2412	17.637
Low_2	2417	17.648
Low_3	2422	17.772
Low_4	2427	17.810
Middle_6	2437	17.923
High_9	2452	17.285
High_10	2457	17.678
High_11	2462	17.921
High_12	2467	17.830
High_13	2472	17.700

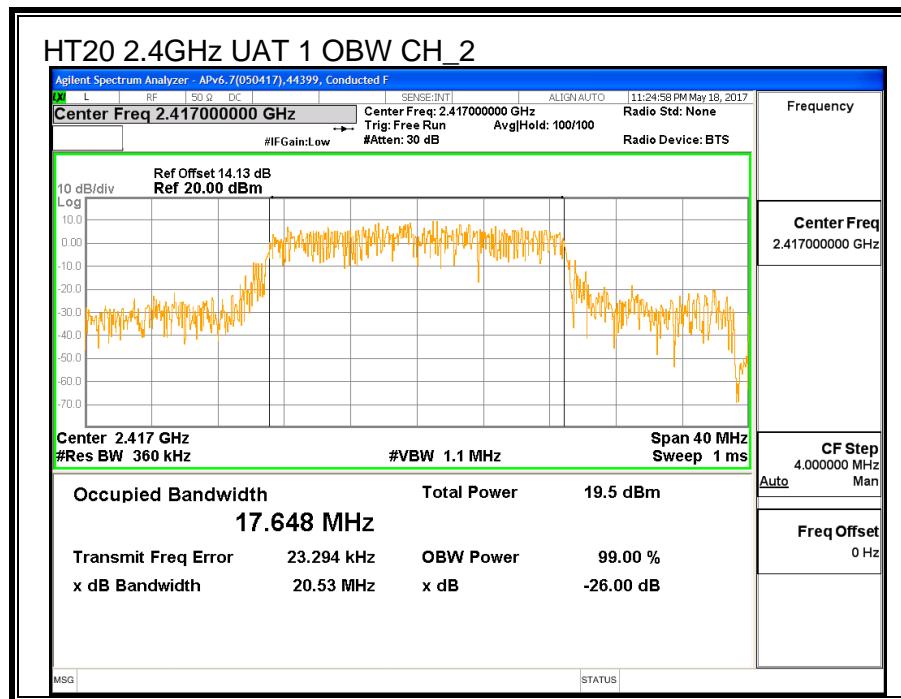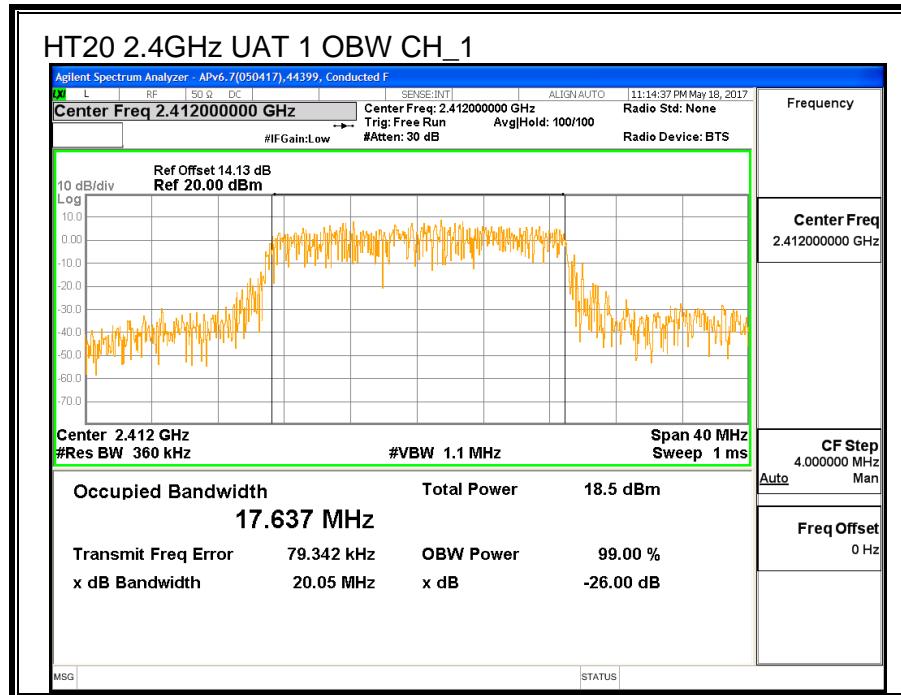

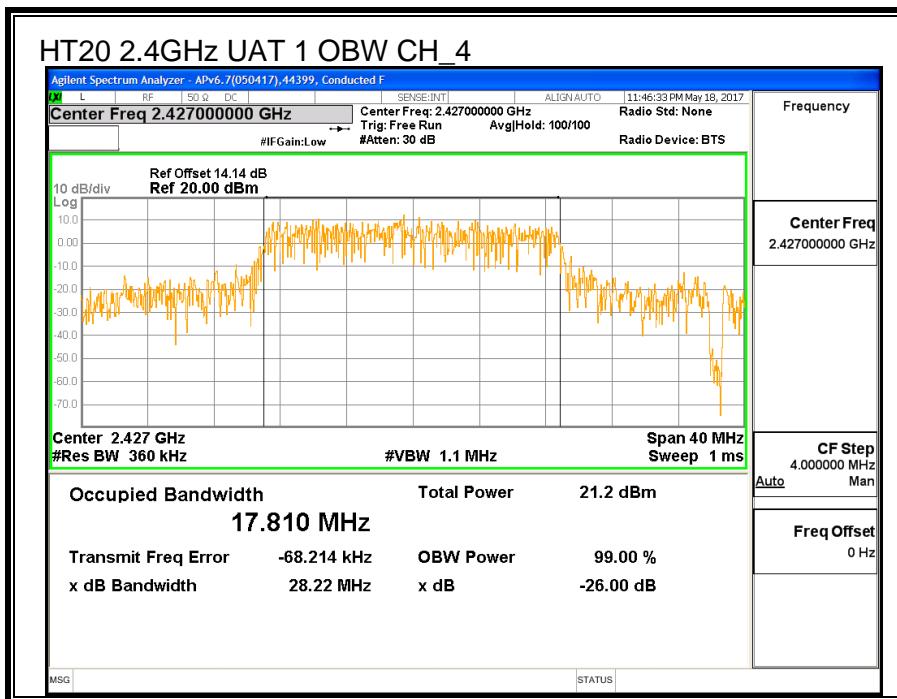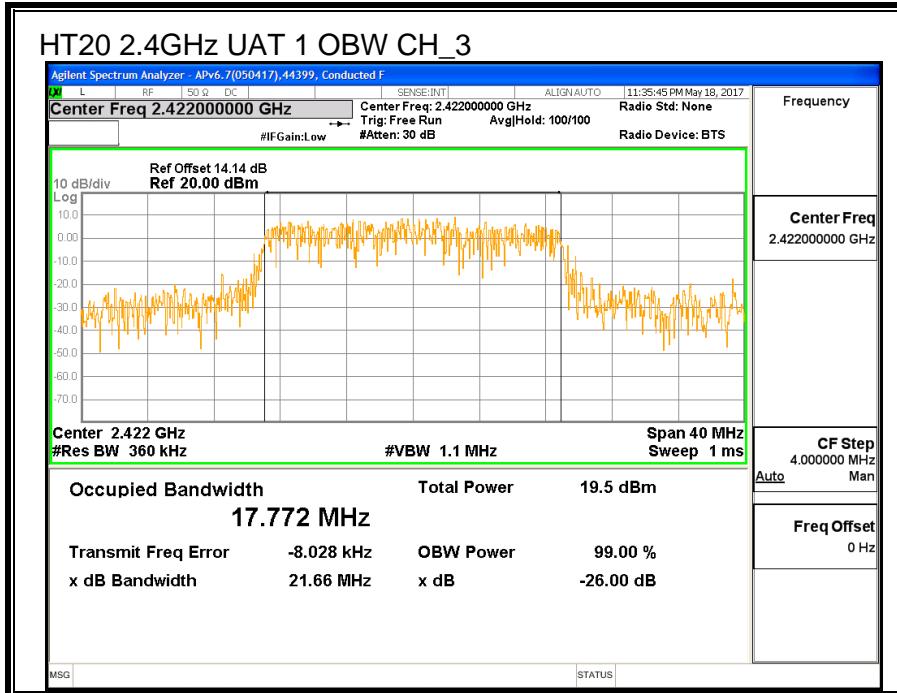

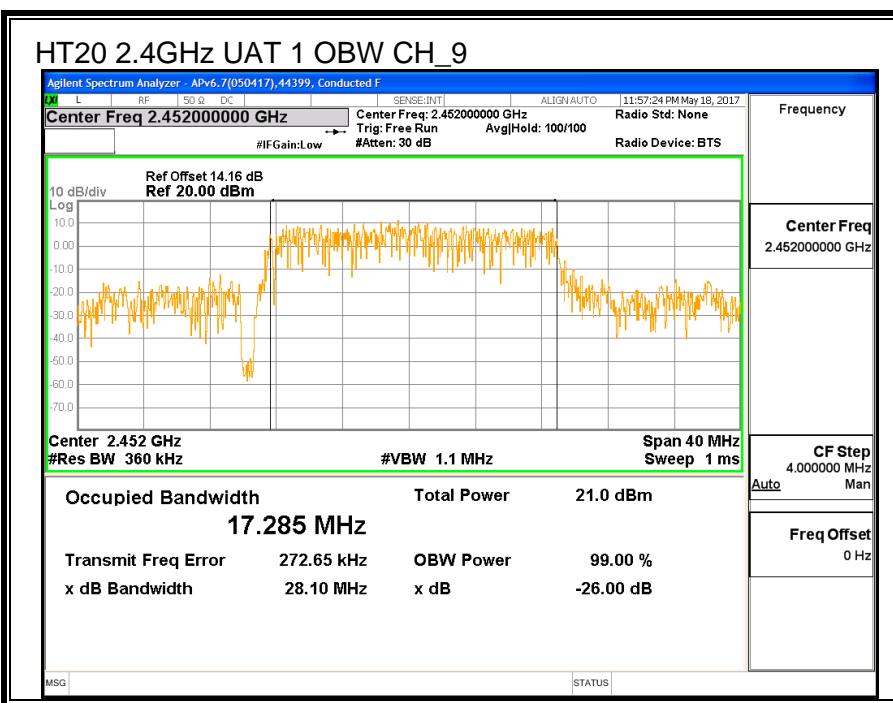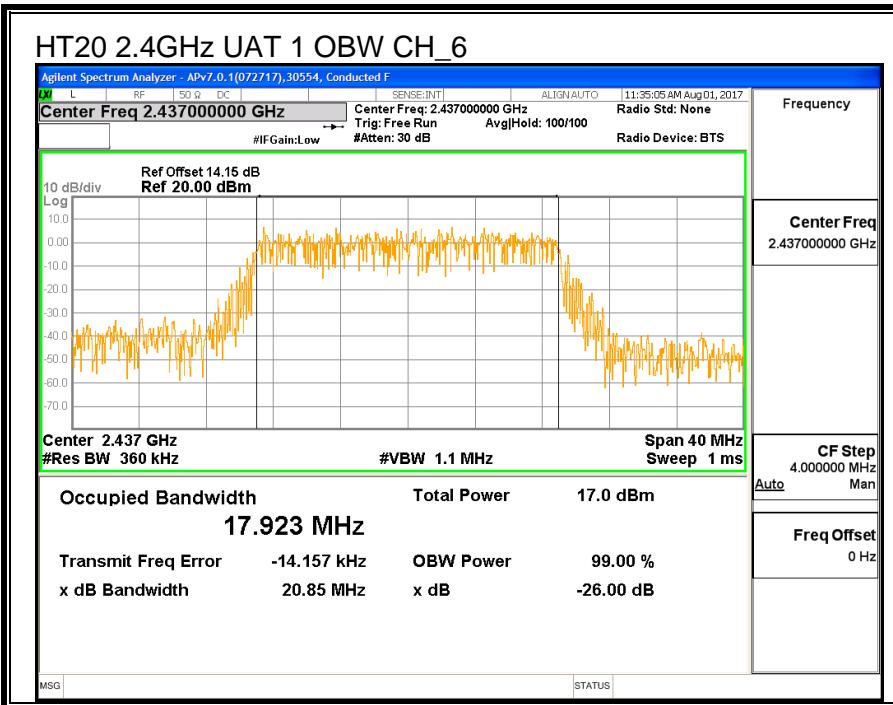

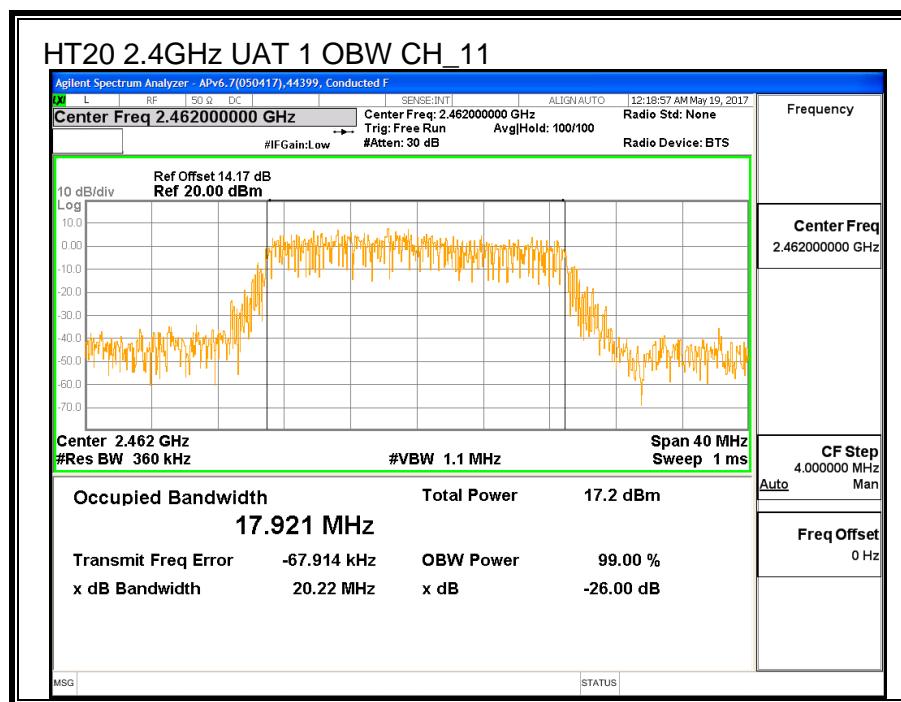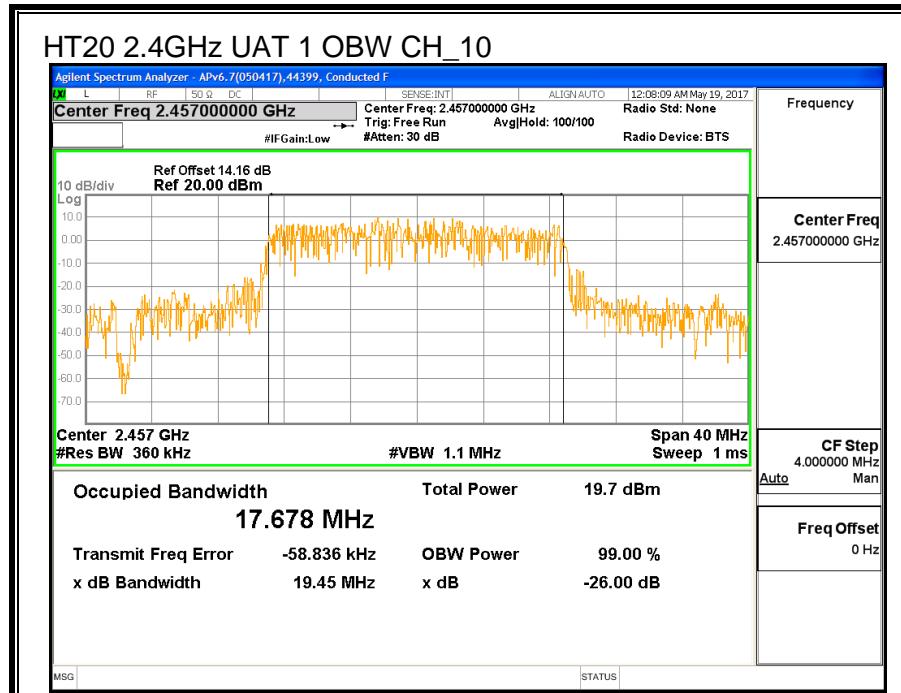

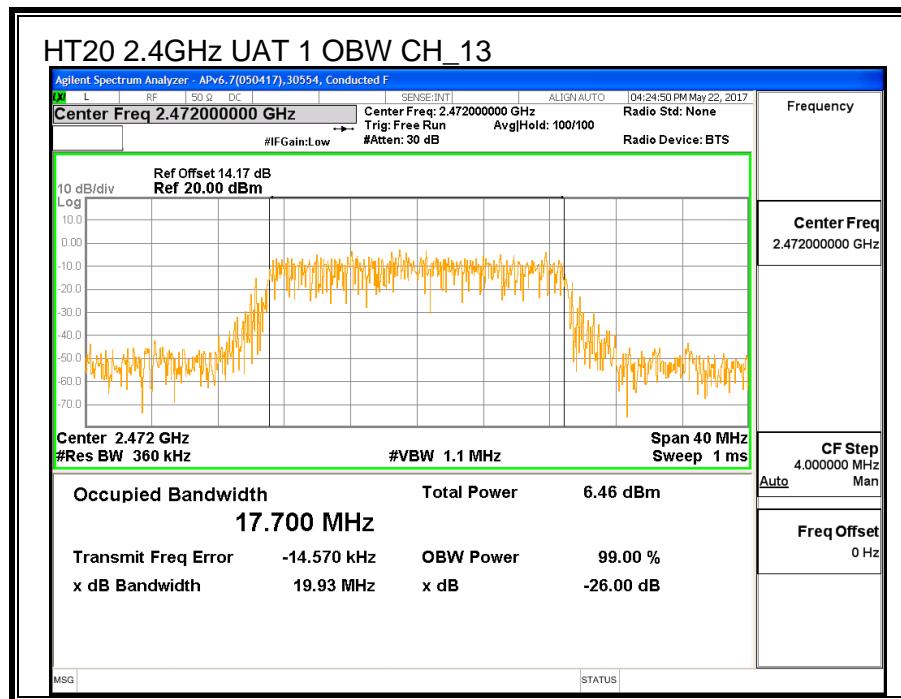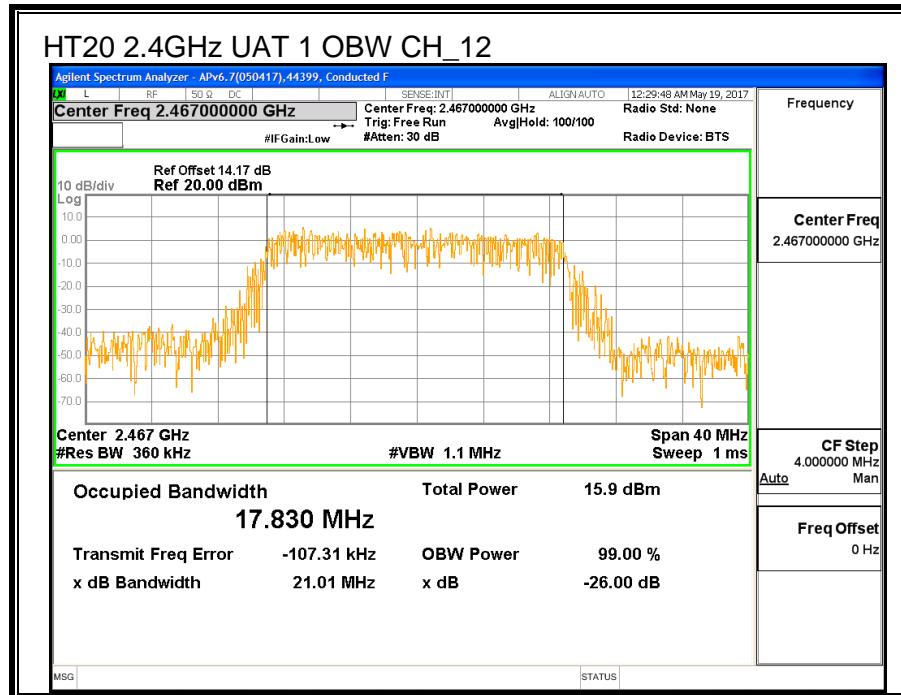

### 8.3.3. AVERAGE POWER

ID:	30554	Date:	8/1/17
-----	-------	-------	--------

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power UAT 1 (MHz)
Low_1	2412	17.43
Low_2	2417	19.41
Low_3	2422	21.42
Low_4	2427	21.39
Middle_6	2437	21.44
High_9	2452	21.47
High_10	2457	19.42
High_11	2462	17.39
High_12	2467	15.40
High_13	2472	7.97

### 8.3.4. OUTPUT POWER

<b>ID:</b>	30554	<b>Date:</b>	8/1/17
------------	-------	--------------	--------

#### LIMITS

FCC §15.247

IC RSS-247 (5.4) (d)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	-1.67	30.00	30	36	30.00
Low_2	2417	-1.67	30.00	30	36	30.00
Low_3	2422	-1.67	30.00	30	36	30.00
Low_4	2427	-1.67	30.00	30	36	30.00
Middle_6	2437	-1.67	30.00	30	36	30.00
High_9	2452	-1.67	30.00	30	36	30.00
High_10	2457	-1.67	30.00	30	36	30.00
High_11	2462	-1.67	30.00	30	36	30.00
High_12	2467	-1.67	30.00	30	36	30.00
High_13	2472	-1.67	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

### Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	23.42	23.42	30.00	-6.58
Low_2	2417	25.46	25.46	30.00	-4.54
Low_3	2422	24.82	24.82	30.00	-5.18
Low_4	2427	27.68	27.68	30.00	-2.32
Middle_6	2437	27.51	27.51	30.00	-2.49
High_9	2452	27.66	27.66	30.00	-2.34
High_10	2457	25.48	25.48	30.00	-4.52
High_11	2462	23.52	23.52	30.00	-6.48
High_12	2467	21.61	21.61	30.00	-8.39
High_13	2472	14.57	14.57	30.00	-15.43

### 8.3.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247

IC RSS-247 (5.2) (b)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



#### RESULTS



Duty Cycle CF (dB)	0	Included in Calculations of Corr'd PSD
-----------------------	---	---



Results



Channel	Frequency (MHz)	Meas PSD (dBm/3KHz)	Total Corr'd Power (dBm/3KHz)	Limit (dBm/3KHz)	Margin (dB)
Low_1	2412	-6.69	-6.69	8	-14.69
Low_2	2417	-5.23	-5.23	8	-13.23
Low_3	2422	-5.56	-5.56	8	-13.56
Low_4	2427	-4.19	-4.19	8	-12.19
Middle_6	2437	-2.48	-2.48	8	-10.48
High_9	2452	-4.77	-4.773	8	-12.77
High_10	2457	-4.78	-4.78	8	-12.78
High_11	2462	-7.93	-7.93	8	-15.93
High_12	2467	-8.56	-8.56	8	-16.56
High_13	2472	-18.47	-18.47	8	-26.47

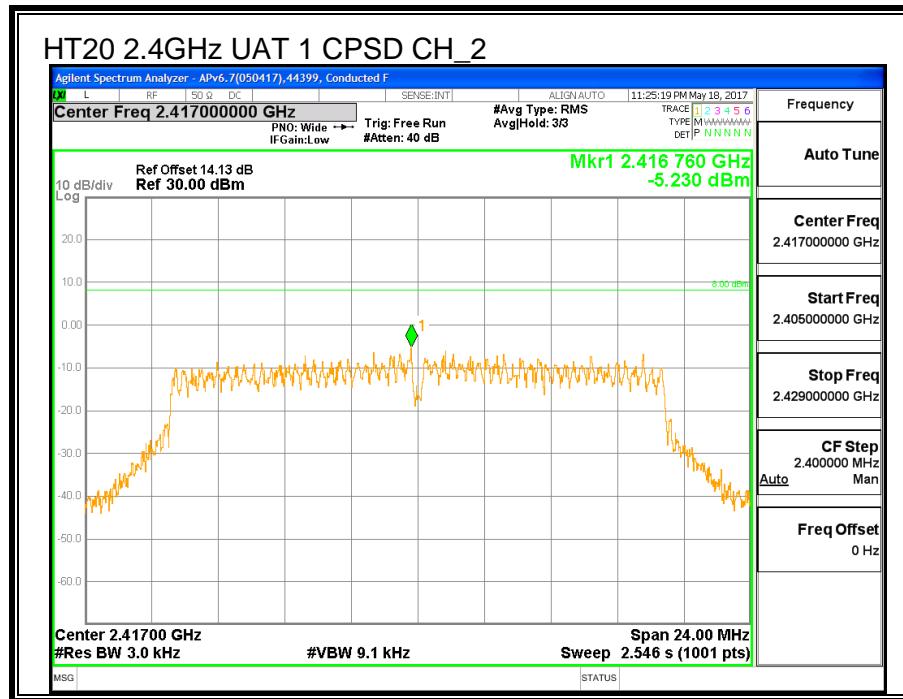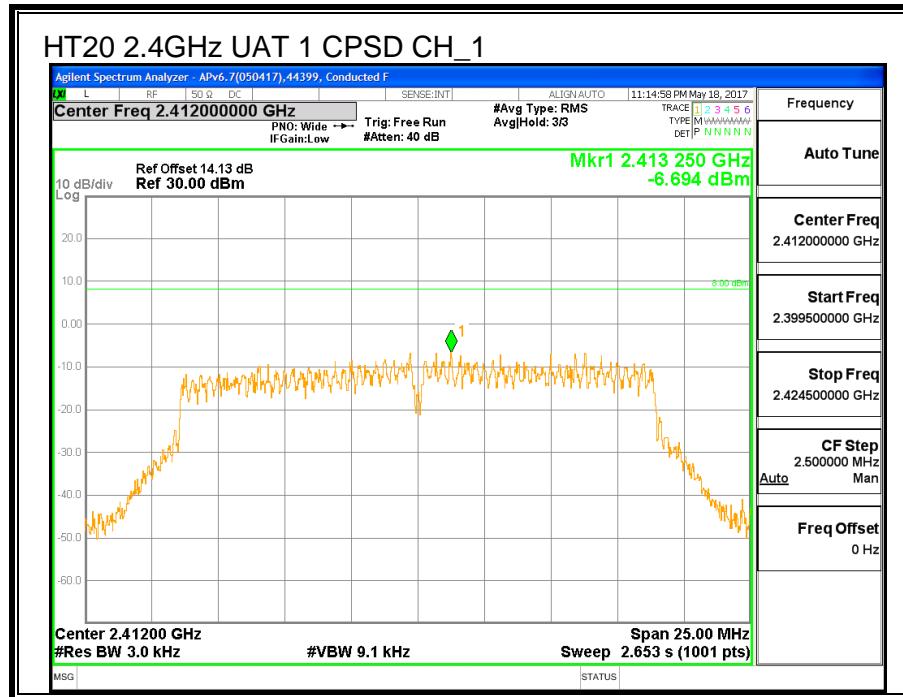

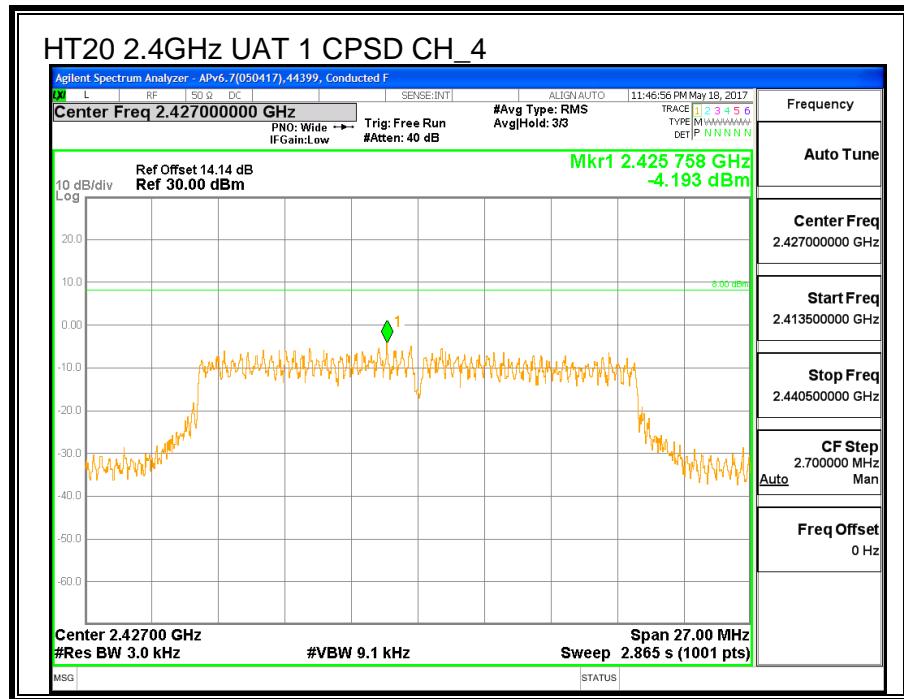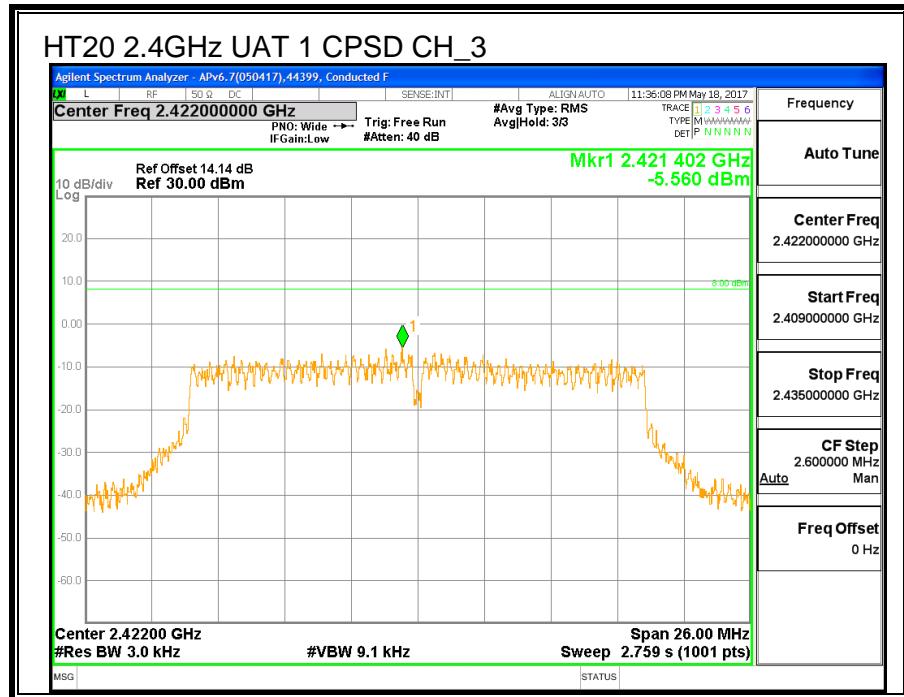

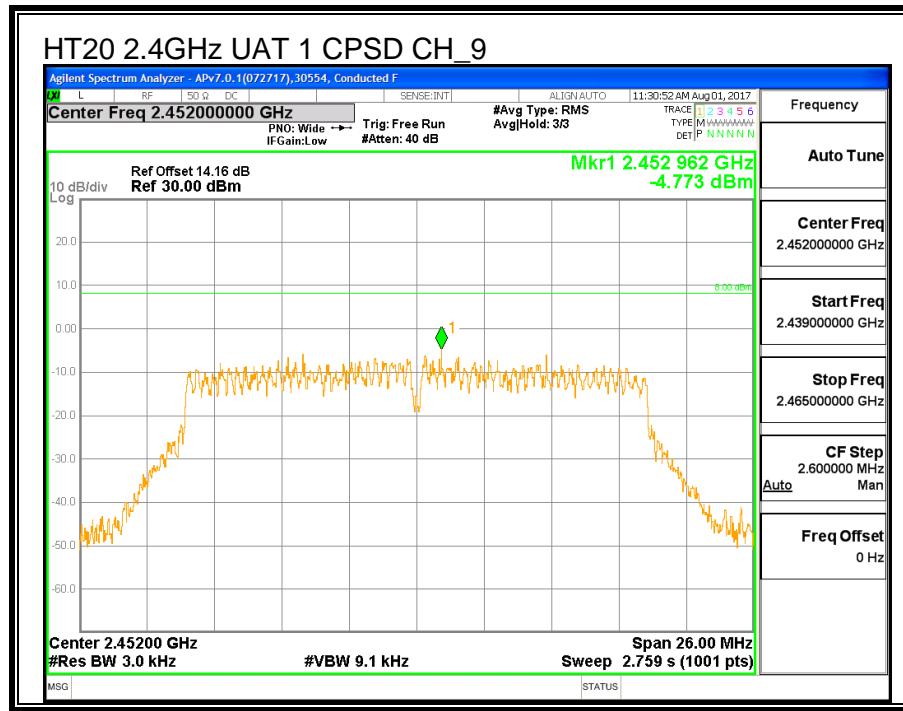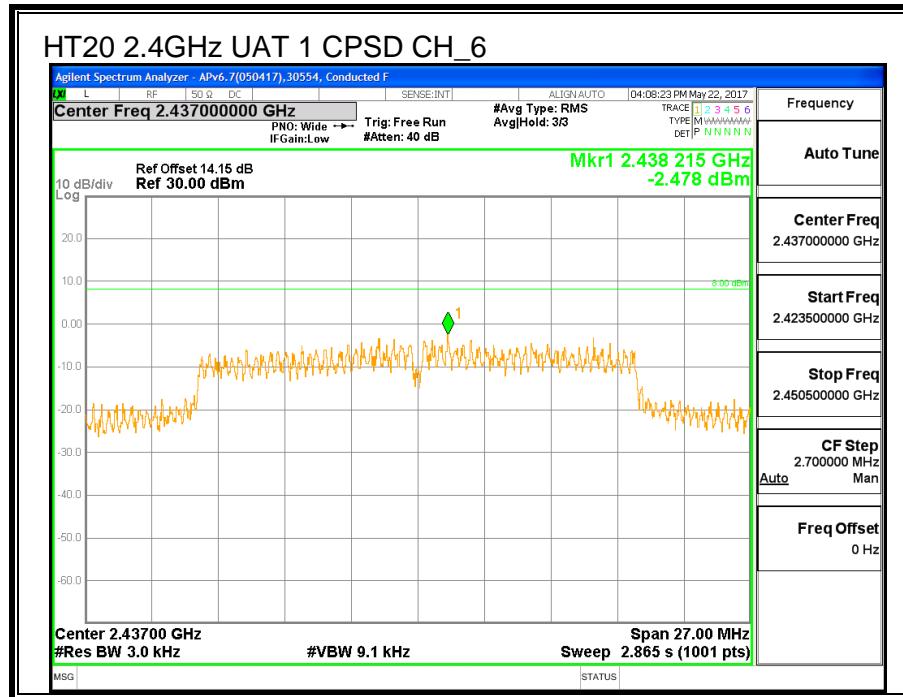

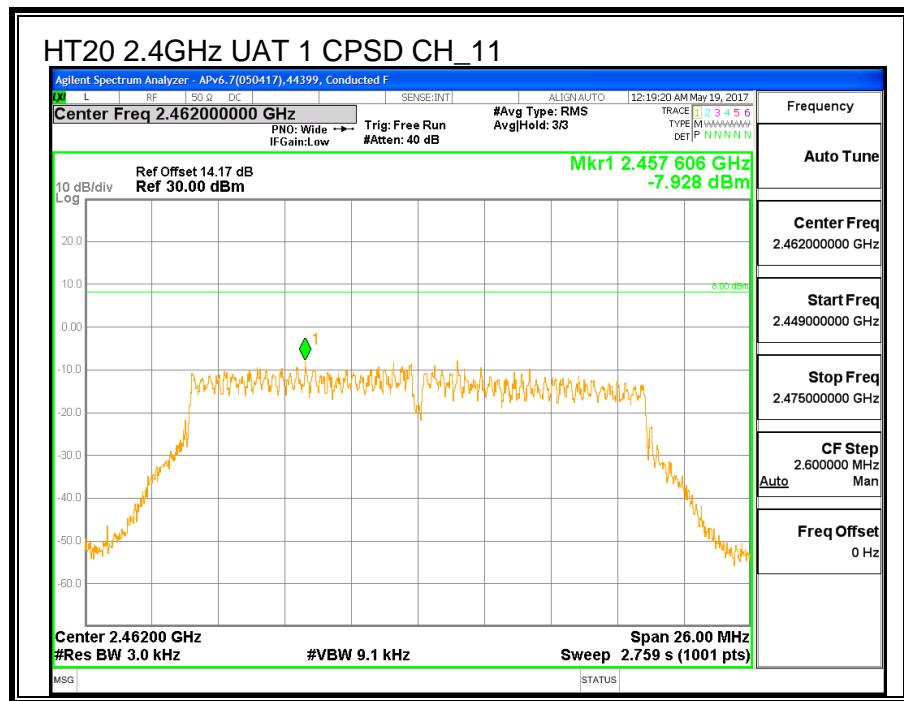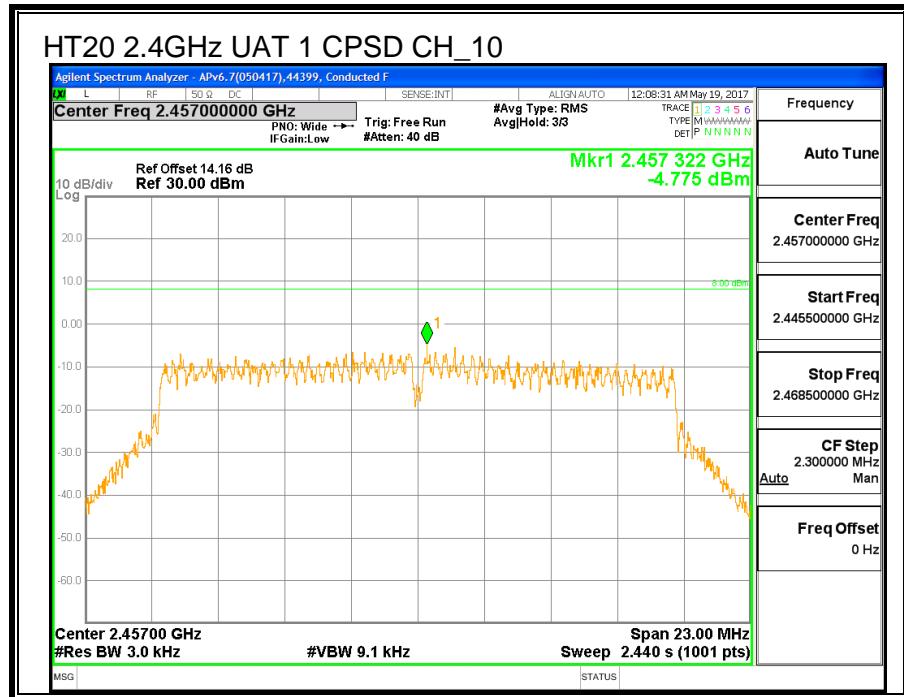

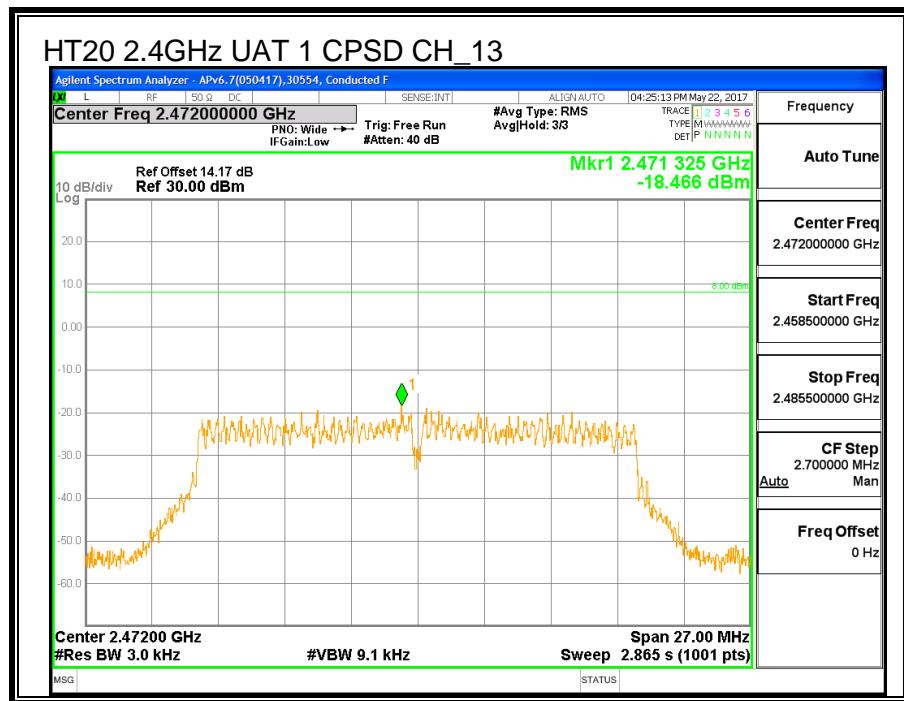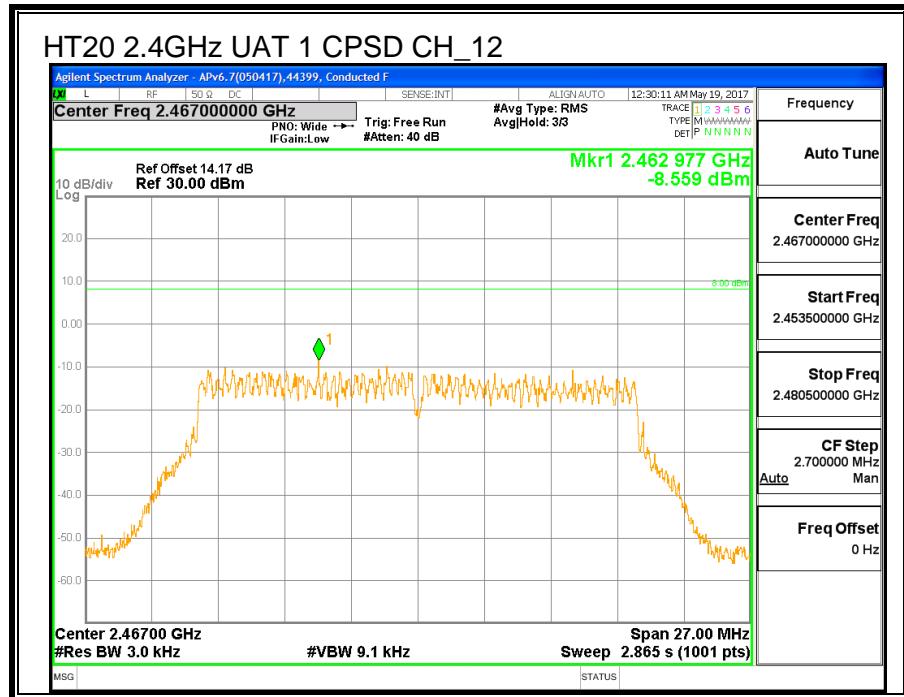

### 8.3.6. CONDUCTED BANDEdge AND SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

**CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS**

