



CERTIFICATION TEST REPORT

Report Number. : 11708394-E1V5

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1905

FCC ID : BCG-E3172A

IC : 579C-E3172A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS - 247 ISSUE 2

Date Of Issue:
August 17, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	7/25/2017	Initial Review	Francisco Guarnero
V2	8/08/2017	Addressed TCB questions	Chin Pang
V3	8/09/2017	Addressed TCB questions	Jin Li
V4	8/15/2017	Addressed TCB questions	Chin Pang
V5	8/17/2017	Addressed TCB questions	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	9
4.2. <i>SAMPLE CALCULATION</i>	9
4.3. <i>MEASUREMENT UNCERTAINTY</i>	9
5. EQUIPMENT UNDER TEST	10
5.1. <i>DESCRIPTION OF EUT</i>	10
5.2. <i>MAXIMUM OUTPUT POWER</i>	10
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	10
5.4. <i>SOFTWARE AND FIRMWARE</i>	10
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	11
5.6. <i>DESCRIPTION OF TEST SETUP</i>	12
6. TEST AND MEASUREMENT EQUIPMENT	16
7. MEASUREMENT METHODS	17
8. ANTENNA PORT TEST RESULTS	18
8.1. <i>ON TIME AND DUTY CYCLE</i>	18
8.2. <i>UAT 1, P_{max} BASIC DATA RATE GFSK MODULATION</i>	20
8.2.1. 20 dB AND 99% BANDWIDTH	20
8.2.2. HOPPING FREQUENCY SEPARATION	23
8.2.3. NUMBER OF HOPPING CHANNELS.....	24
8.2.4. AVERAGE TIME OF OCCUPANCY	27
8.2.5. OUTPUT POWER	31
8.2.6. AVERAGE POWER	32
8.2.7. CONDUCTED SPURIOUS EMISSIONS.....	33
8.3. <i>UAT 1, P_{max} ENHANCED DATA RATE DQPSK MODULATION</i>	38
8.3.1. OUTPUT POWER	38
8.3.2. AVERAGE POWER	39
8.4. <i>UAT 1, P_{max} ENHANCED DATA RATE 8PSK MODULATION</i>	40
8.4.1. 20 dB AND 99% BANDWIDTH	40
8.4.2. HOPPING FREQUENCY SEPARATION	43
8.4.3. NUMBER OF HOPPING CHANNELS.....	44
8.4.4. AVERAGE TIME OF OCCUPANCY	47
8.4.5. OUTPUT POWER	51
8.4.6. AVERAGE POWER	52

8.4.1. CONDUCTED SPURIOUS EMISSIONS.....	53
8.5. <i>UAT 1, Plow BASIC DATA RATE GFSK MODULATION</i>	58
8.5.1. 20 dB AND 99% BANDWIDTH	58
8.5.2. HOPPING FREQUENCY SEPARATION	61
8.5.3. NUMBER OF HOPPING CHANNELS.....	62
8.5.4. AVERAGE TIME OF OCCUPANCY	65
8.5.5. OUTPUT POWER	69
8.5.6. AVERAGE POWER	70
8.5.7. CONDUCTED SPURIOUS EMISSIONS.....	71
8.6. <i>UAT 1, Plow ENHANCED DATA RATE DQPSK MODULATION</i>	76
8.6.1. OUTPUT POWER	76
8.6.2. AVERAGE POWER	77
8.7. <i>UAT 1, Plow ENHANCED DATA RATE 8PSK MODULATION</i>	78
8.7.1. 20 dB AND 99% BANDWIDTH	78
8.7.2. HOPPING FREQUENCY SEPARATION	81
8.7.3. NUMBER OF HOPPING CHANNELS.....	82
8.7.4. AVERAGE TIME OF OCCUPANCY	85
8.7.5. OUTPUT POWER	89
8.7.6. AVERAGE POWER	90
8.7.7. CONDUCTED SPURIOUS EMISSIONS.....	91
8.8. <i>LAT 3, Pmax BASIC DATA RATE GFSK MODULATION</i>	96
8.8.1. 20 dB AND 99% BANDWIDTH	96
8.8.2. HOPPING FREQUENCY SEPARATION	99
8.8.3. NUMBER OF HOPPING CHANNELS.....	100
8.8.4. AVERAGE TIME OF OCCUPANCY	103
8.8.5. OUTPUT POWER	107
8.8.6. AVERAGE POWER	108
8.9. <i>LAT 3, Pmax ENHANCED DATA RATE DQPSK MODULATION</i>	113
8.9.1. OUTPUT POWER	113
8.9.2. AVERAGE POWER	114
8.10. <i>LAT 3, Pmax ENHANCED DATA RATE 8PSK MODULATION</i>	115
8.10.1. 20 dB AND 99% BANDWIDTH9	115
8.10.2. HOPPING FREQUENCY SEPARATION.....	118
8.10.3. NUMBER OF HOPPING CHANNELS	119
8.10.4. AVERAGE TIME OF OCCUPANCY	122
8.10.5. OUTPUT POWER	126
8.10.6. AVERAGE POWER	127
8.10.7. CONDUCTED SPURIOUS EMISSIONS	128
8.11. <i>LAT 3, Plow BASIC DATA RATE GFSK MODULATION</i>	133
8.11.1. 20 dB AND 99% BANDWIDTH.....	133
8.11.2. HOPPING FREQUENCY SEPARATION.....	136
8.11.3. NUMBER OF HOPPING CHANNELS	137
8.11.4. AVERAGE TIME OF OCCUPANCY	140
8.11.5. OUTPUT POWER	144
8.11.6. AVERAGE POWER	145
8.11.7. CONDUCTED SPURIOUS EMISSIONS	146
8.12. <i>LAT 3, Plow ENHANCED DATA RATE DQPSK MODULATION</i>	151
8.12.1. OUTPUT POWER	151
8.12.2. AVERAGE POWER	152

8.13. <i>LAT 3, Plow ENHANCED DATA RATE 8PSK MODULATION</i>	153
8.13.1. 20 dB AND 99% BANDWIDTH.....	153
8.13.2. HOPPING FREQUENCY SEPARATION.....	156
8.13.3. NUMBER OF HOPPING CHANNELS	157
8.13.4. AVERAGE TIME OF OCCUPANCY	160
8.13.5. OUTPUT POWER	164
8.13.6. AVERAGE POWER	165
8.13.7. CONDUCTED SPURIOUS EMISSIONS	166
9. RADIATED TEST RESULTS.....	171
9.1. <i>LIMITS AND PROCEDURE</i>	171
9.2. <i>UAT 1, P_{max} BASIC DATA RATE GFSK MODULATION</i>	172
9.2.1. RESTRICTED BANEDGE (LOW CHANNEL).....	172
9.2.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	174
9.2.3. HARMONICS AND SPURIOUS EMISSIONS	176
9.3. <i>UAT 1, P_{max} ENHANCED DATA RATE 8PSK MODULATION</i>	182
9.3.1. RESTRICTED BANEDGE (LOW CHANNEL).....	182
9.3.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	184
9.3.3. HARMONICS AND SPURIOUS EMISSIONS	186
9.4. <i>UAT 1, Plow BASIC DATA RATE GFSK MODULATION</i>	192
9.4.1. RESTRICTED BANEDGE (LOW CHANNEL).....	192
9.4.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	194
9.4.3. HARMONICS AND SPURIOUS EMISSIONS	196
9.5. <i>UAT 1, Plow ENHANCED DATA RATE 8PSK MODULATION</i>	202
9.5.1. RESTRICTED BANEDGE (LOW CHANNEL).....	202
9.5.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	204
9.5.3. HARMONICS AND SPURIOUS EMISSIONS	206
9.6. <i>LAT 3, P_{max} BASIC DATA RATE GFSK MODULATION</i>	212
9.6.1. RESTRICTED BANEDGE (LOW CHANNEL).....	212
9.6.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	214
9.6.3. HARMONICS AND SPURIOUS EMISSIONS	216
9.7. <i>LAT 3, P_{max} ENHANCED DATA RATE 8PSK MODULATION</i>	222
9.7.1. RESTRICTED BANEDGE (LOW CHANNEL).....	222
9.7.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	224
9.7.3. HARMONICS AND SPURIOUS EMISSIONS	226
9.8. <i>LAT 3, Plow BASIC DATA RATE GFSK MODULATION</i>	232
9.8.1. RESTRICTED BANEDGE (LOW CHANNEL).....	232
9.8.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	234
9.8.3. HARMONICS AND SPURIOUS EMISSIONS	236
9.9. <i>LAT 3, Plow ENHANCED DATA RATE 8PSK MODULATION</i>	242
9.9.1. RESTRICTED BANEDGE (LOW CHANNEL).....	242
9.9.2. AUTHORIZED BANEDGE (HIGH CHANNEL).....	244
9.9.3. HARMONICS AND SPURIOUS EMISSIONS	246
9.10. <i>WORST-CASE BELOW 1 GHz</i>	252
9.11. <i>WORST-CASE ABOVE 18 GHz</i>	254
10. AC POWER LINE CONDUCTED EMISSIONS	256
10.1. <i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE</i>	257

10.2. *EUT POWERED BY HOST PC VIA USB CABLE*..... 259

1. **SETUP PHOTOS**..... 261

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A1905

SERIAL NUMBER: C7CTW008J8W1


DATE TESTED: APRIL 19, 2017 – JUNE 26, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 2	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



MENGISTU MEKURIA
Senior Engineer
UL VERIFICATION SERVICES INC.

Prepared By:



TRI PHAM
Lab Engineer
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A (IC:2324B-1)	<input checked="" type="checkbox"/> Chamber D (IC: 22541-1)
<input type="checkbox"/> Chamber B (IC:2324B-2)	<input checked="" type="checkbox"/> Chamber E (IC: 22541-2)
<input type="checkbox"/> Chamber C (IC:2324B-3)	<input type="checkbox"/> Chamber F (IC: 22541-3)
	<input type="checkbox"/> Chamber G (IC: 22541-4)
	<input type="checkbox"/> Chamber H (IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The equipment under test is a mobile phone with GSM, GPRS, EGPRS, UMTS, LTE and TD-SCDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth, GPS and NFC. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Config	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
UAT 1	Pmax	2402 - 2480	Basic GFSK	20.12	102.80
		2402 - 2480	DQPSK	20.15	103.51
		2402 - 2480	Enhanced 8PSK	20.19	104.47
	Plow	2402 - 2480	Basic GFSK	10.31	10.74
		2402 - 2480	DQPSK	10.41	10.99
		2402 - 2480	Enhanced 8PSK	10.44	11.07
LAT 3	Pmax	2402 - 2480	Basic GFSK	20.10	102.33
		2402 - 2480	DQPSK	19.96	99.08
		2402 - 2480	Enhanced 8PSK	20.15	103.51
	Plow	2402 - 2480	Basic GFSK	10.15	10.35
		2402 - 2480	DQPSK	10.12	10.28
		2402 - 2480	Enhanced 8PSK	10.15	10.35

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	UAT 1 Gain (dBi)	LAT 3 Gain (dBi)
2.4	-2.54	-1.30

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 15.1.40.176.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, above 18GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations, X (Flatbed), Y (Landscape), and Z (Portrait), on both primary and diversity antennas. In addition, the EUT was also investigated with and without AC/DC charger, headphones & laptop. It was determined that X (Flatbed) orientation was the worst-case orientation on both antennas without AC/DC charger, headphones, or laptop; therefore, all final radiated testing was performed with EUT only in X-orientation for 1 - 18GHz and 18 – 26GHz. EUT was tested with AC/DC charger for 30MHz – 1000MHz testing.

Worst-case data rates were:

GFSK mode: DH5

8PSK mode: 3-DH5

DQPSK mode has been verified to have the lowest power.

For simultaneous transmission of multiple channels from the same antenna LAT 3 in the 2.4GHz BT and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
Laptop	Apple	MackBook Air 4	NA	NA
Dongle	N/A	N/A	HDG1409226823	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A


I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A

TEST SETUP- CONDUCTED PORT

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

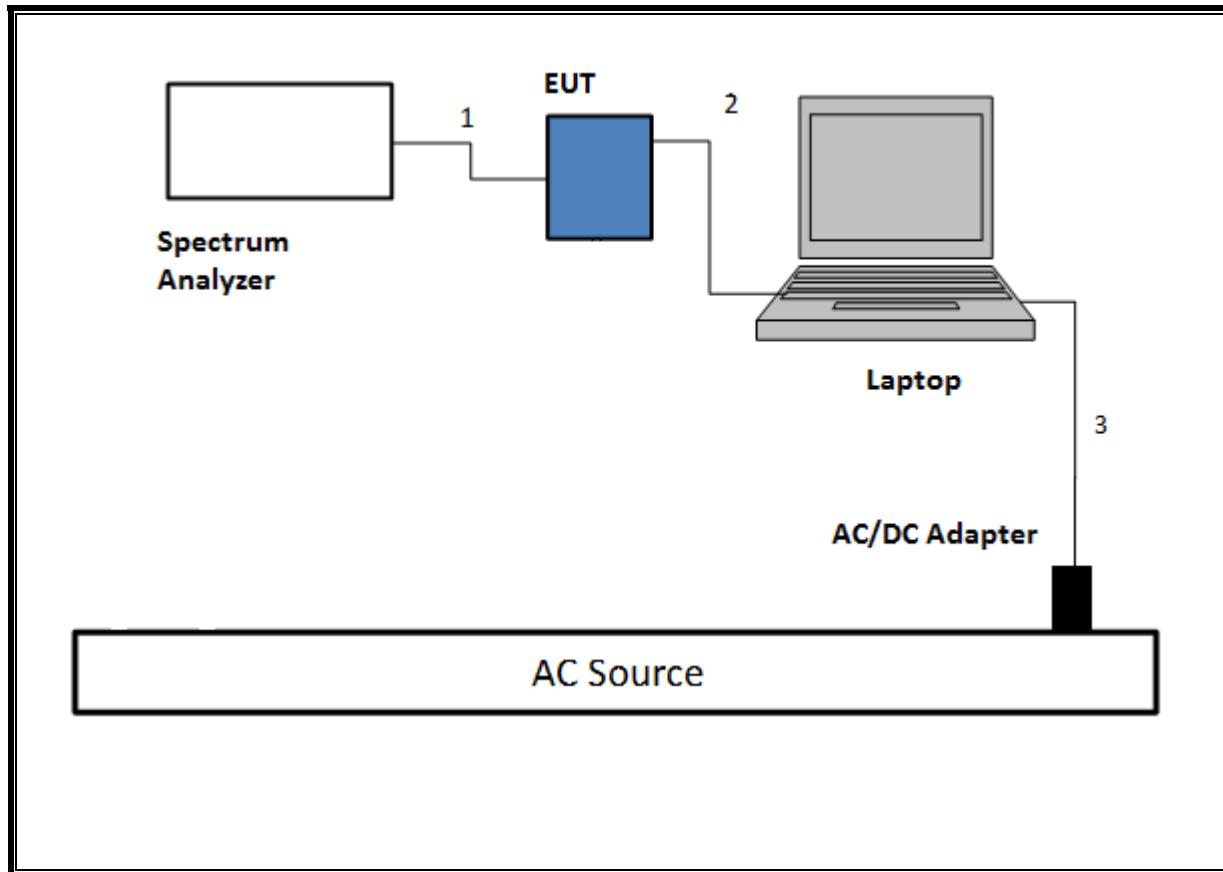

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by AC cord. Test software exercised the EUT.


SETUP DIAGRAM

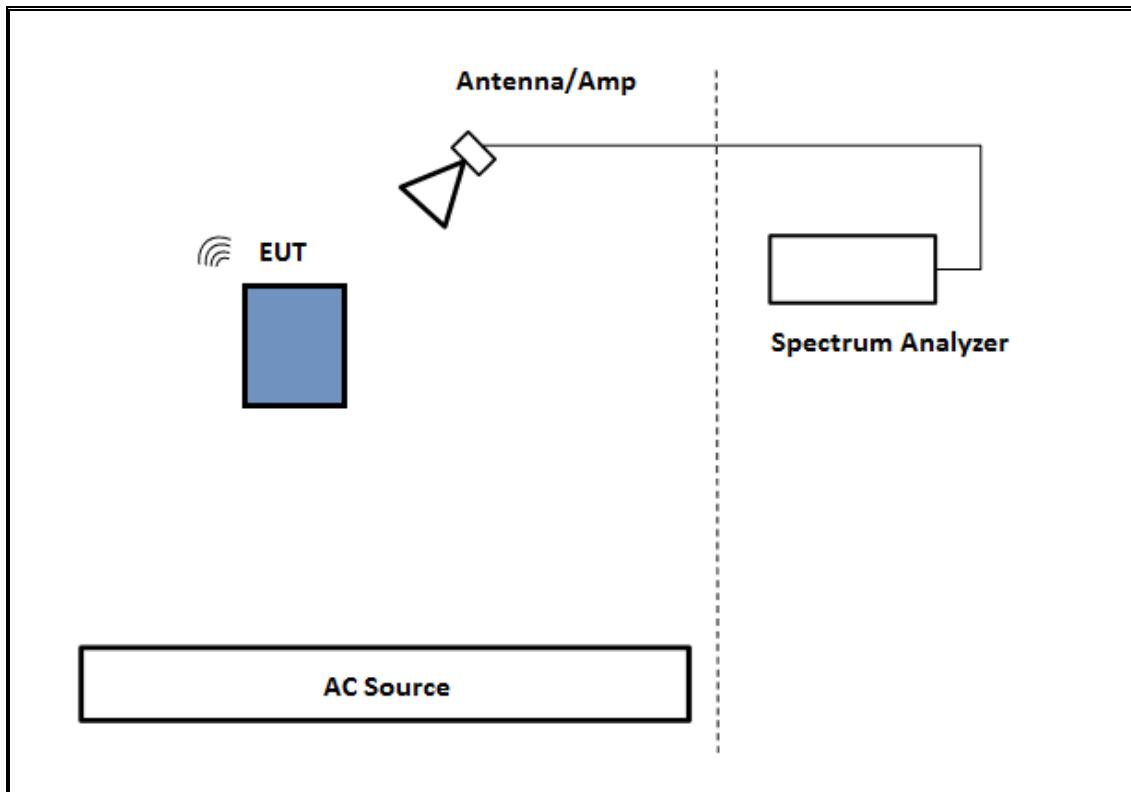

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was powered by AC cord. Test software exercised the EUT.

SETUP DIAGRAM

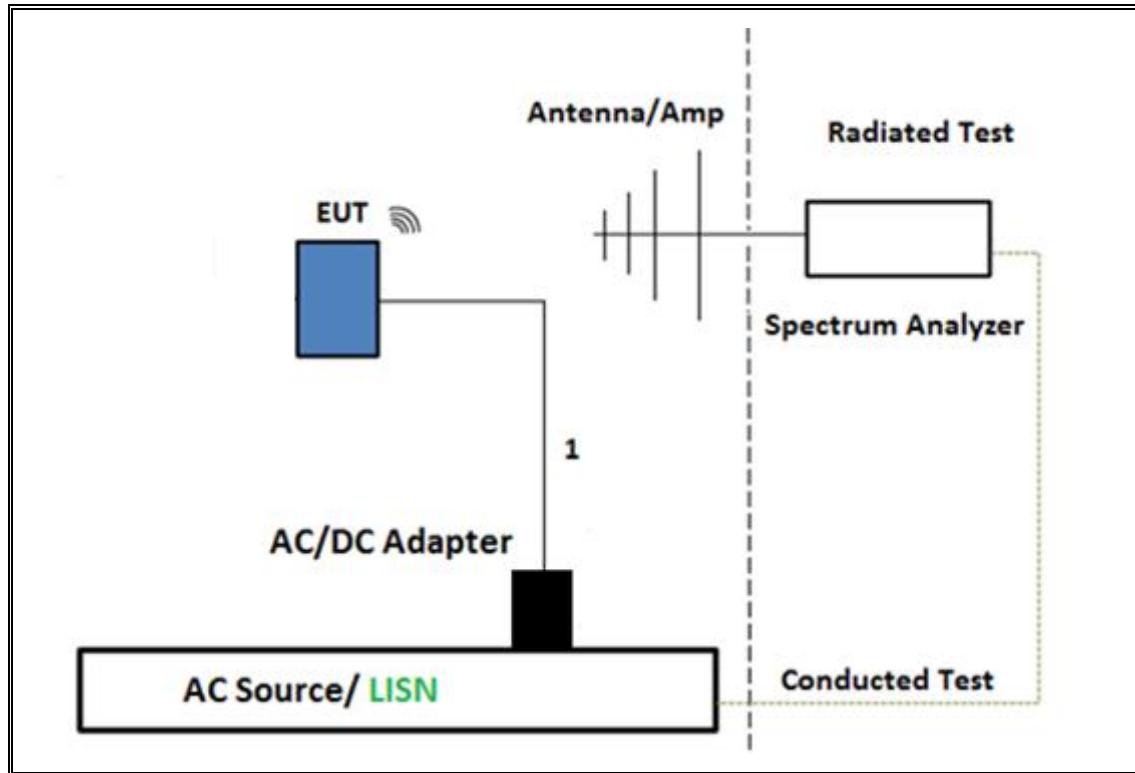

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	4/20/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	11/29/17
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/14/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	3/28/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T243	10/11/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T741	11/29/2017
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	6/20/2017
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent (Keysight) Technologies	E4446A	T177	03/20/2018
Amplifier, 1 to 18GHz, 35dB	Amplical	AMP1G18-35	T1569	9/15/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1613	12/2/2017
*Power Sensor	Keysight	N1921A	T1228	6/20/2017
*Power Meter, P-series single channel	Keysight	N1912A	T1273	07/08/2017
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	6/16/2017
Spectrum Analyzer, 40GHz	Agilent	8564E	T106	9/7/2017
*Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	7/5/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T340	12/14/2017
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1436	01/06/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
Power Cable, Line Conducted Emissions	UL	PG1	T861	9/1/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

NOTE: *testing is completed before equipment calibration expiration date.

7. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3 and 6.5

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3 and 6.6

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE



ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (khz)
GFSK Pmax	130.6	130.6	1.0	100	0.0	0.10
8PSK Pmax	130.6	130.6	1.0	100	0.0	0.10

DUTY CYCLE PLOTS

HOPPING OFF

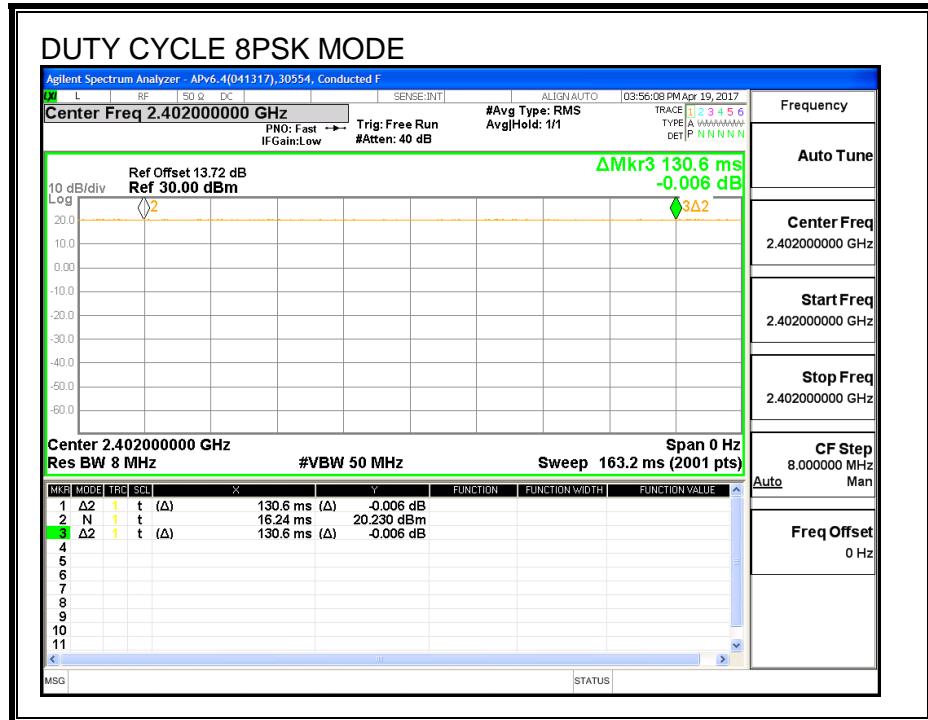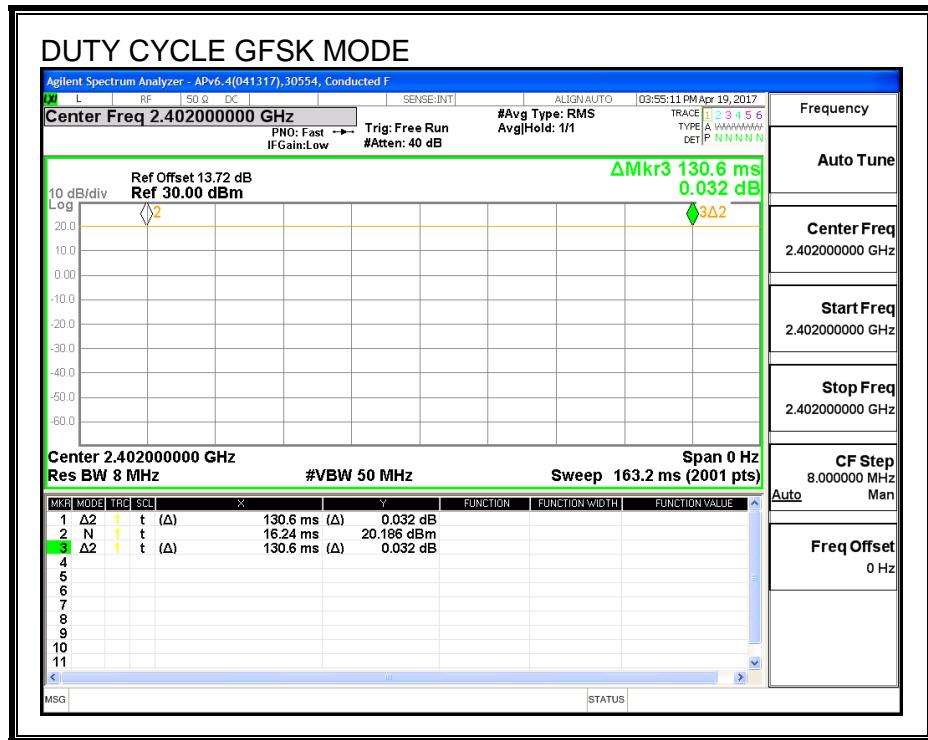

8.2. UAT 1, Pmax BASIC DATA RATE GFSK MODULATION

8.2.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
Low	2402	917.86	951.1
Middle	2441	852.45	842.9
High	2480	851.32	892.4

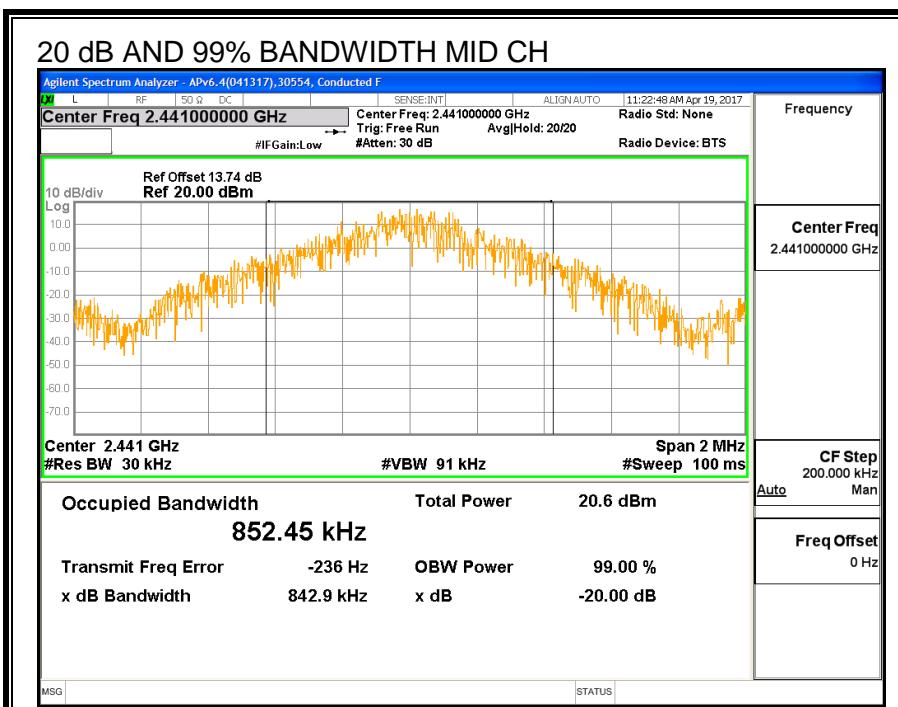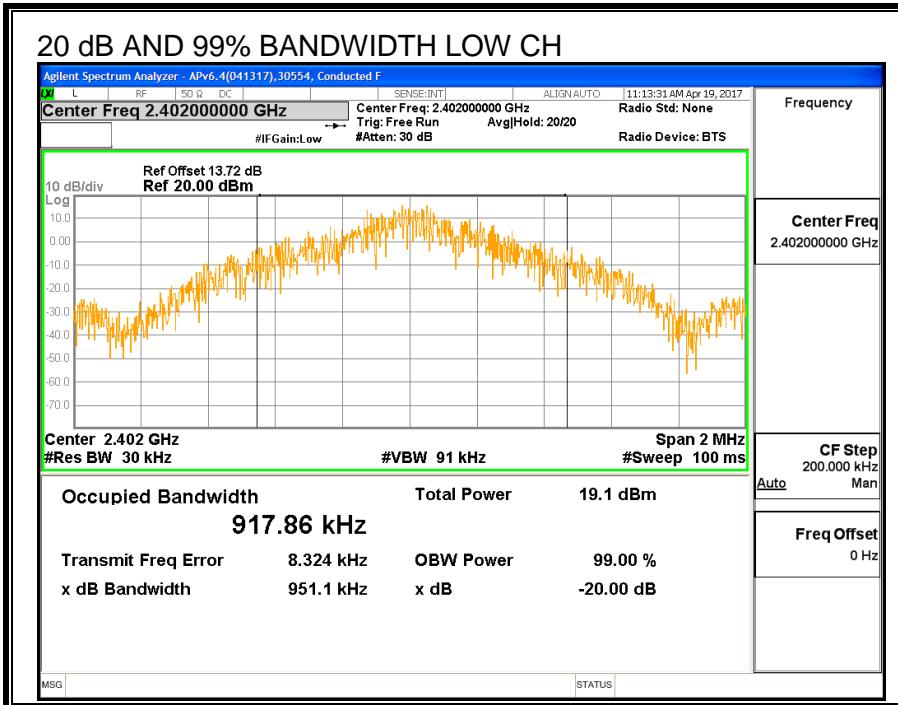

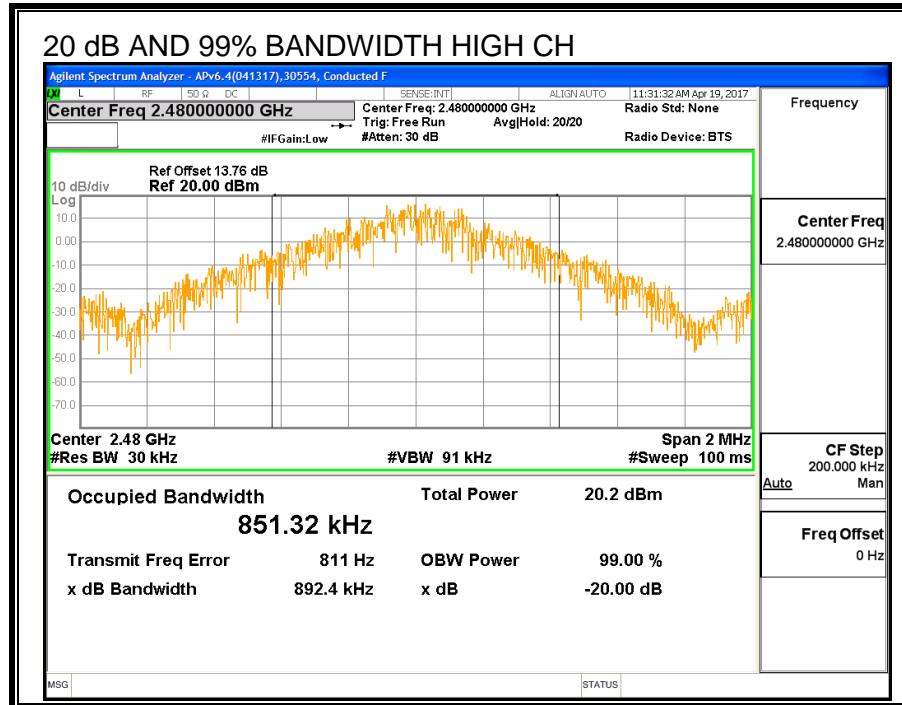

8.2.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (b)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

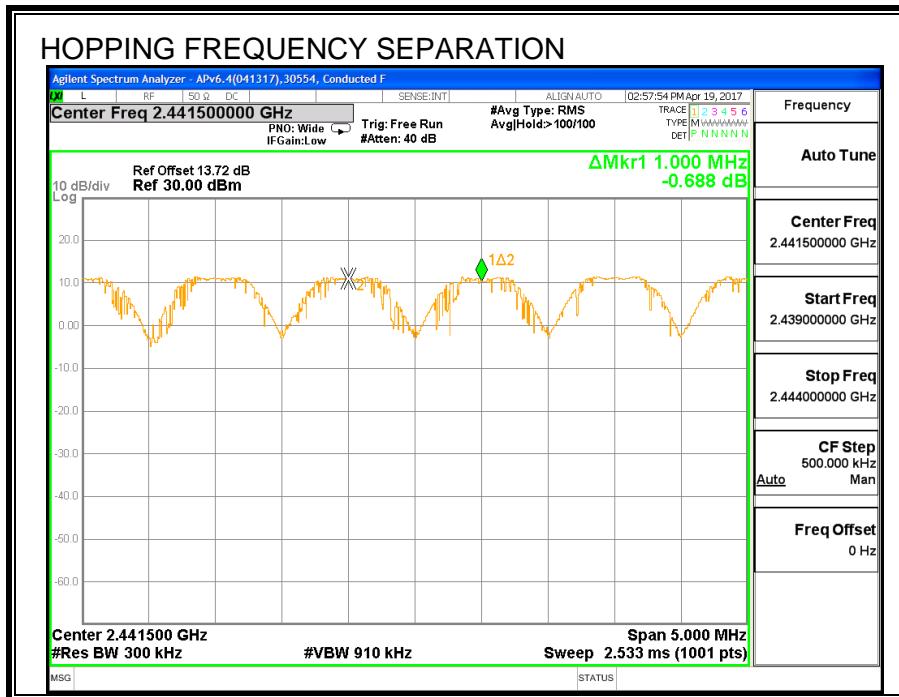

8.2.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

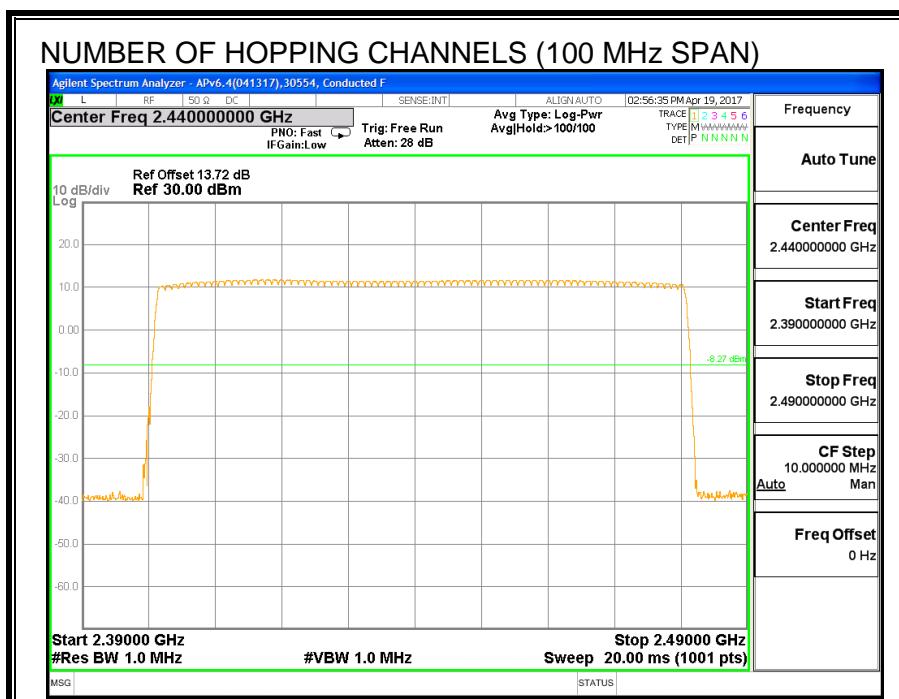


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)



NUMBER OF HOPPING CHANNELS (30 MHz SPAN, SECOND SEGMENT)

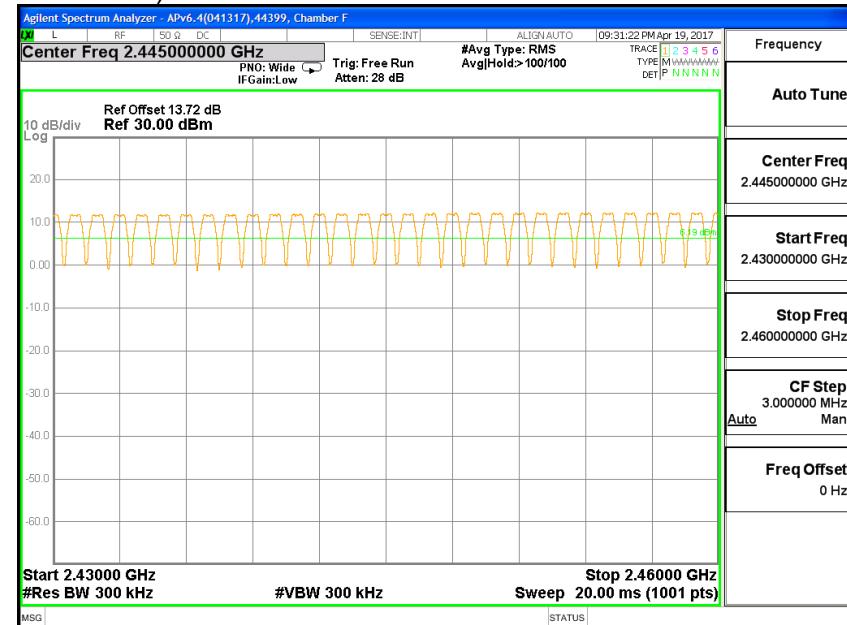

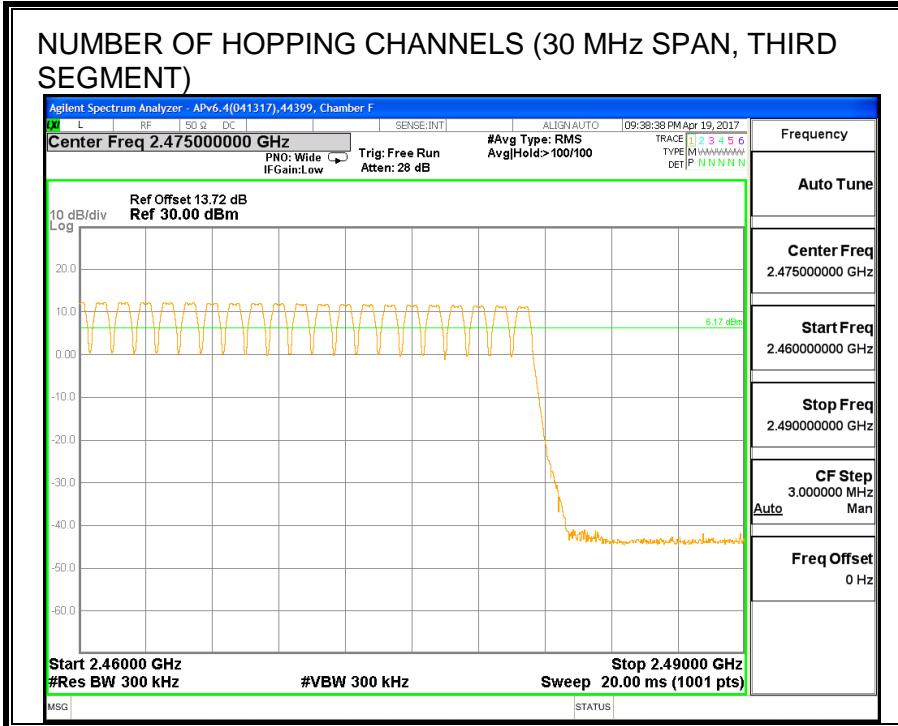

8.2.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.3829	31	0.119	0.4	-0.281
DH3	1.639	18	0.295	0.4	-0.105
DH5	2.888	12	0.347	0.4	-0.053
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.3829	7.75	0.030	0.4	-0.370
DH3	1.639	4.5	0.074	0.4	-0.326
DH5	2.888	3	0.087	0.4	-0.313


PULSE WIDTH - DH1

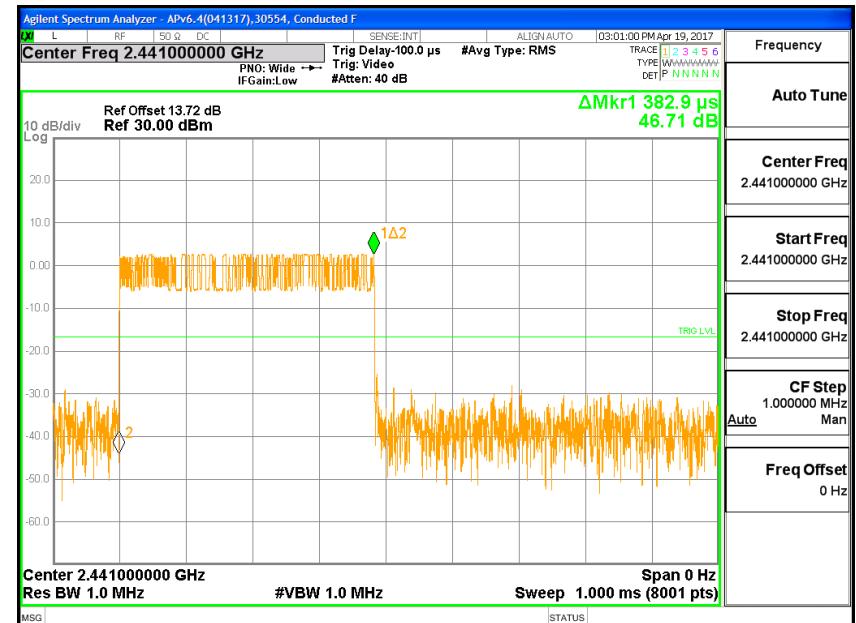

NUMBER OF PULSES - DH1




PULSE WIDTH - DH3

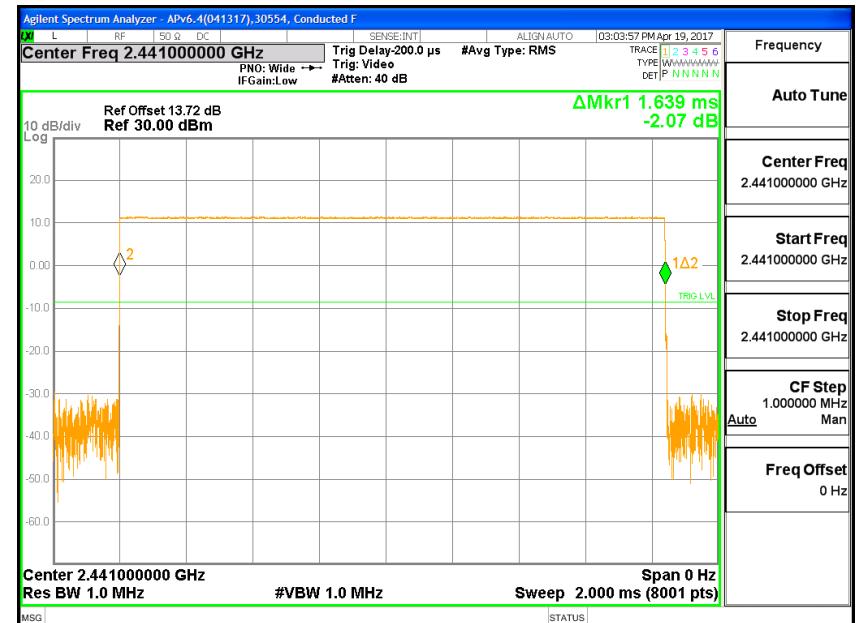


NUMBER OF PULSES - DH3



PULSE WIDTH - DH5

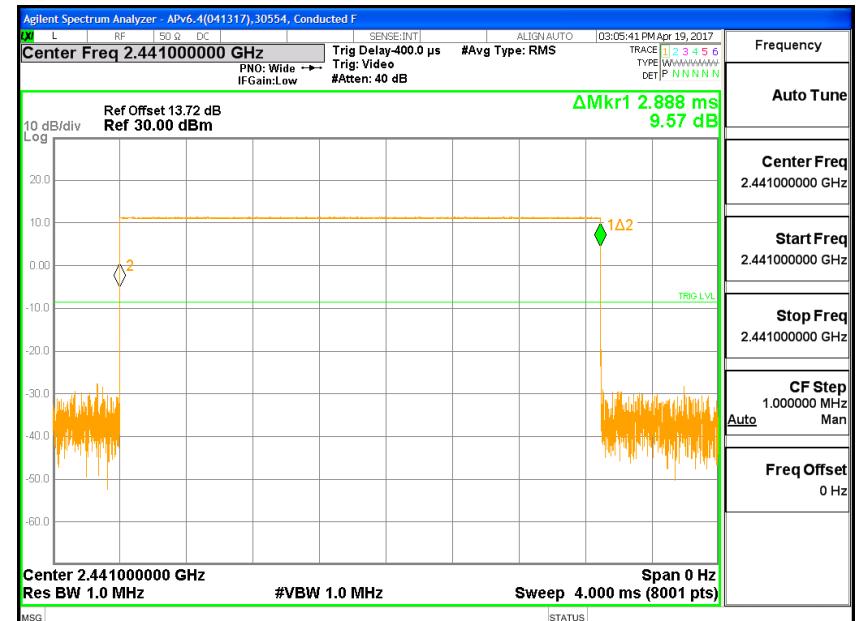

NUMBER OF PULSES - DH5

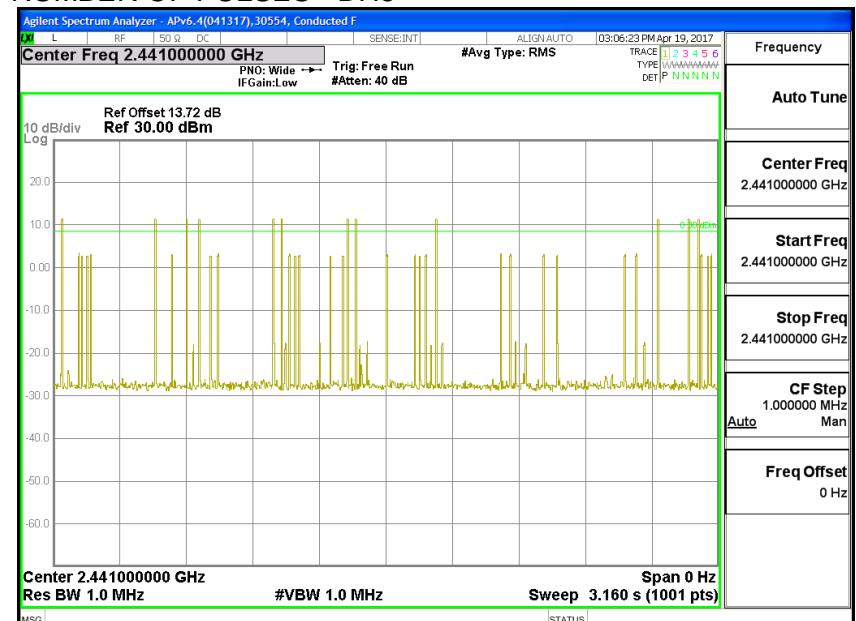

8.2.5. OUTPUT POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.98	30	-10.02
Middle	2441	20.12	30	-9.88
High	2480	20.03	30	-9.97

8.2.6. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.36
Middle	2441	19.58
High	2480	19.48

8.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

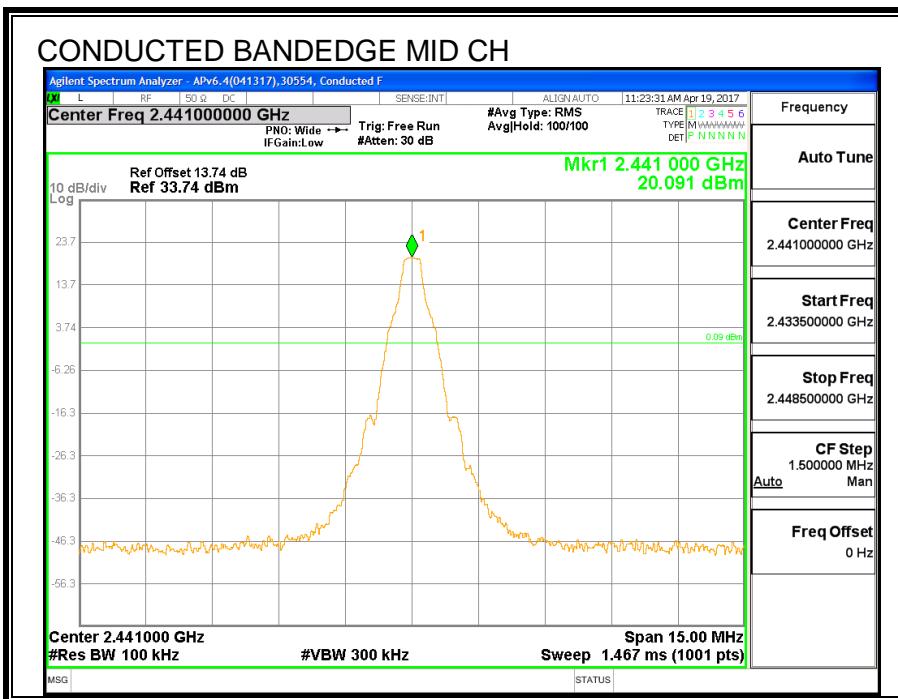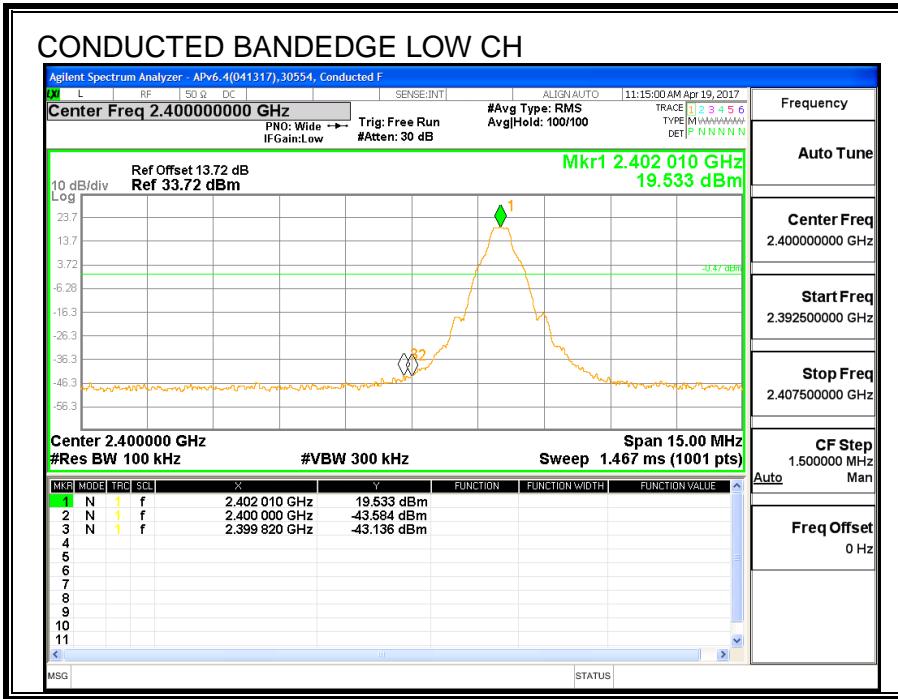

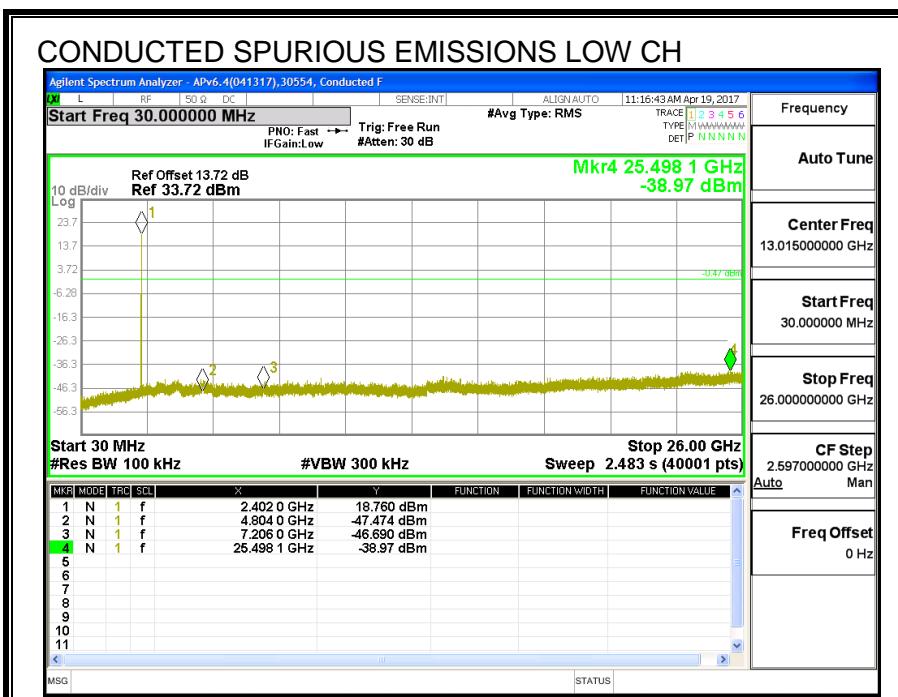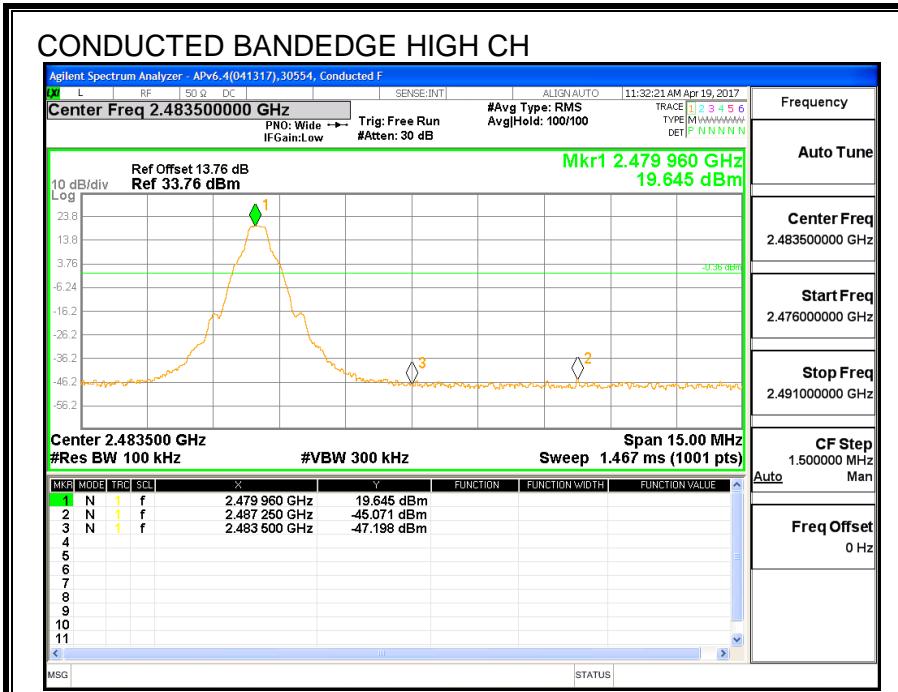

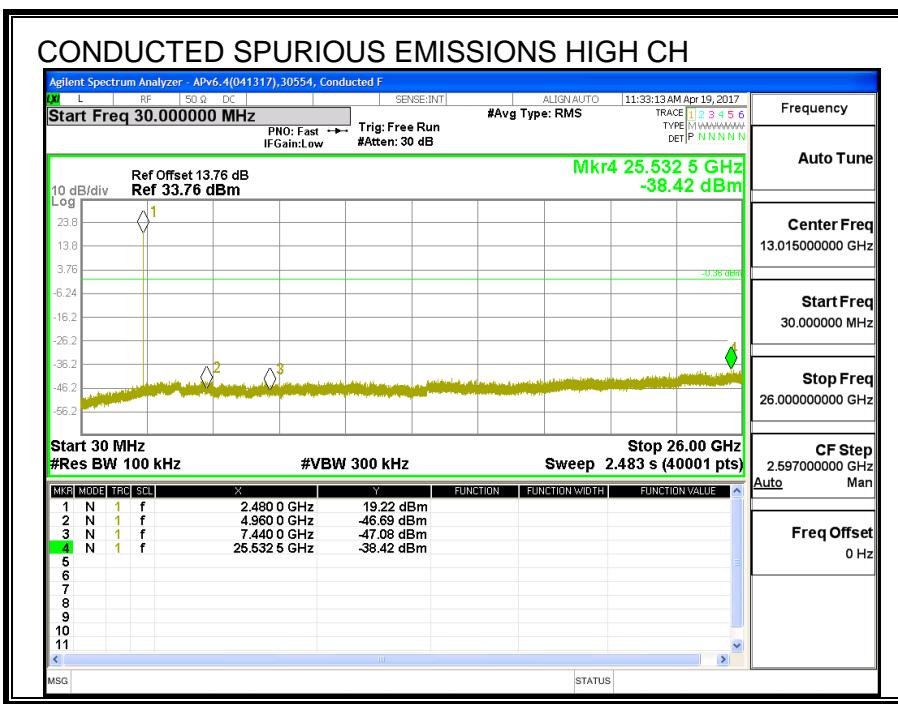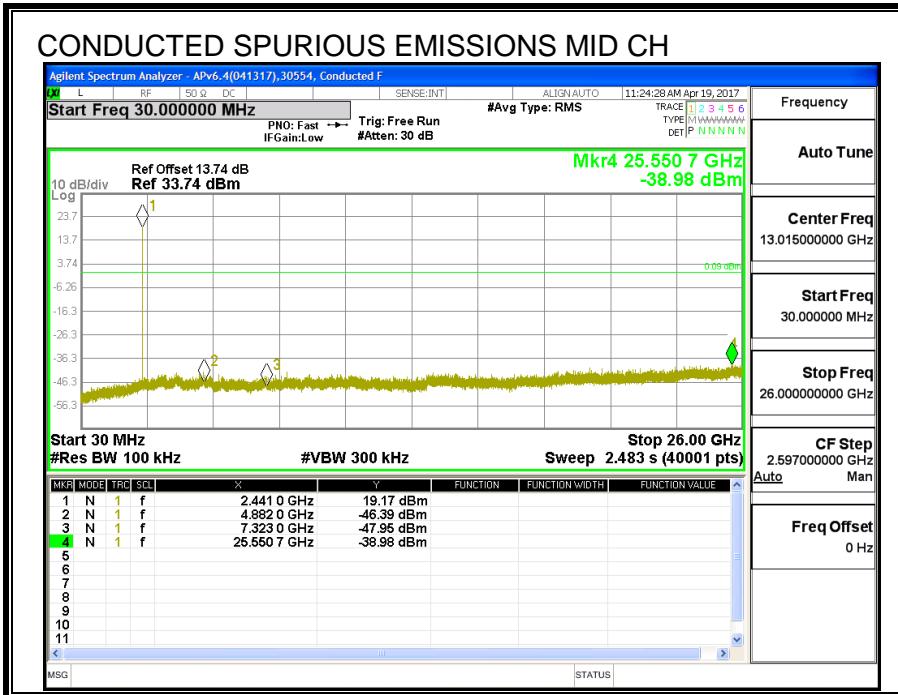

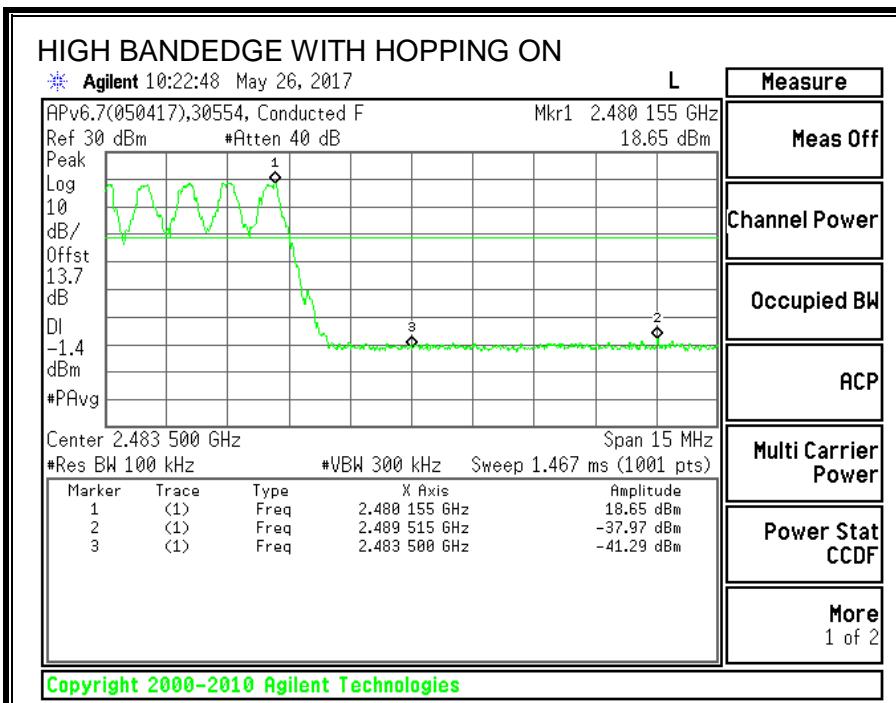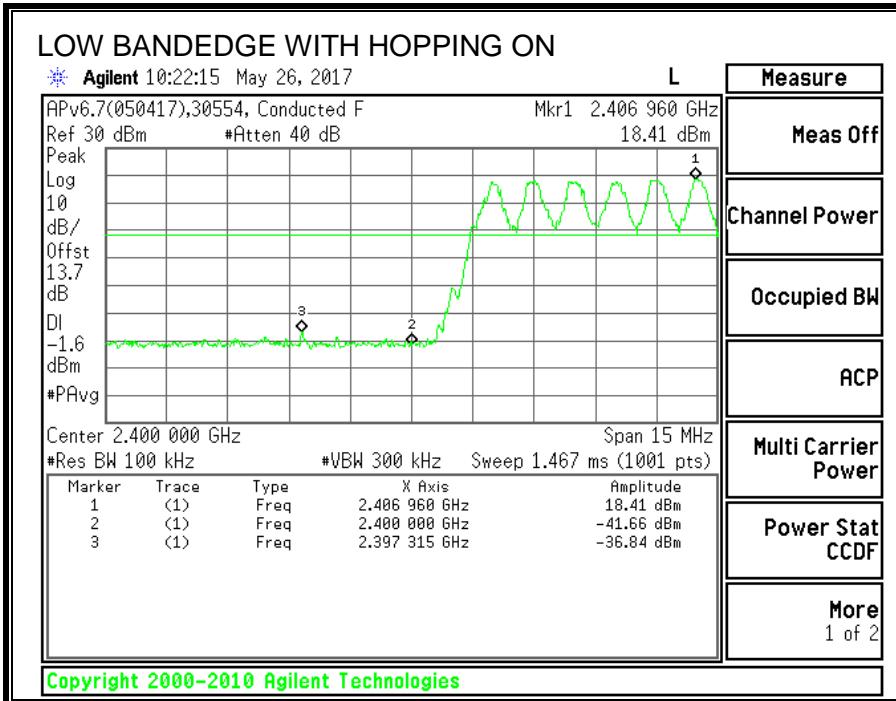

8.3. UAT 1, Pmax ENHANCED DATA RATE DQPSK MODULATION

8.3.1. OUTPUT POWER

ID:	44353	Date:	7/14/2017
-----	-------	-------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.15	21	-0.82
Middle	2441	20.13	21	-0.84
High	2480	20.14	21	-0.83

8.3.2. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	17.42
Middle	2441	17.31
High	2480	17.39

8.4. UAT 1, Pmax ENHANCED DATA RATE 8PSK MODULATION

8.4.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.4361	1.420
Middle	2441	2.2187	1.397
High	2480	1.7772	1.396

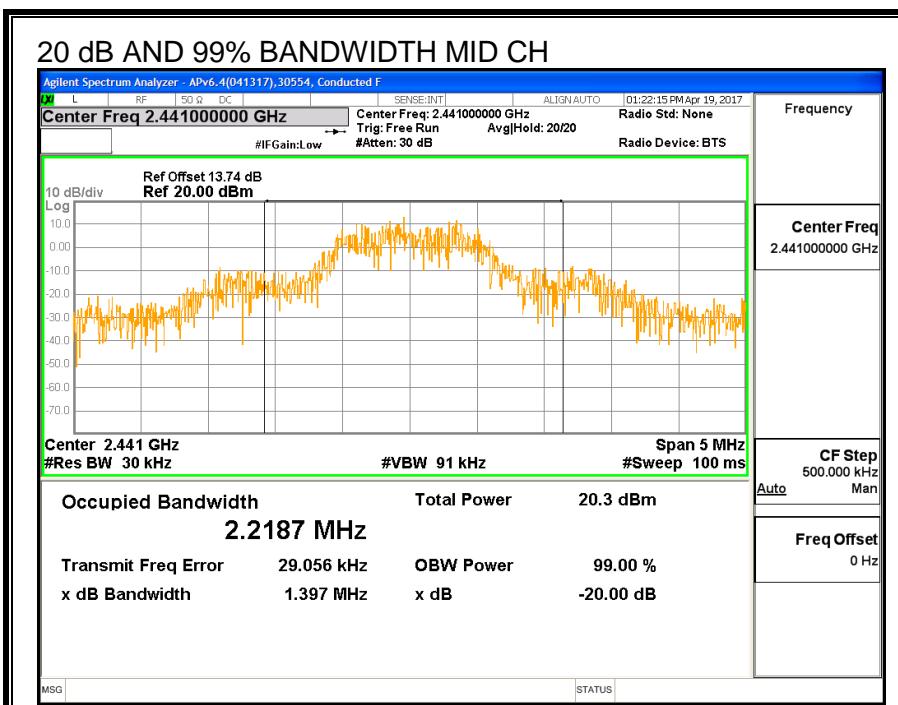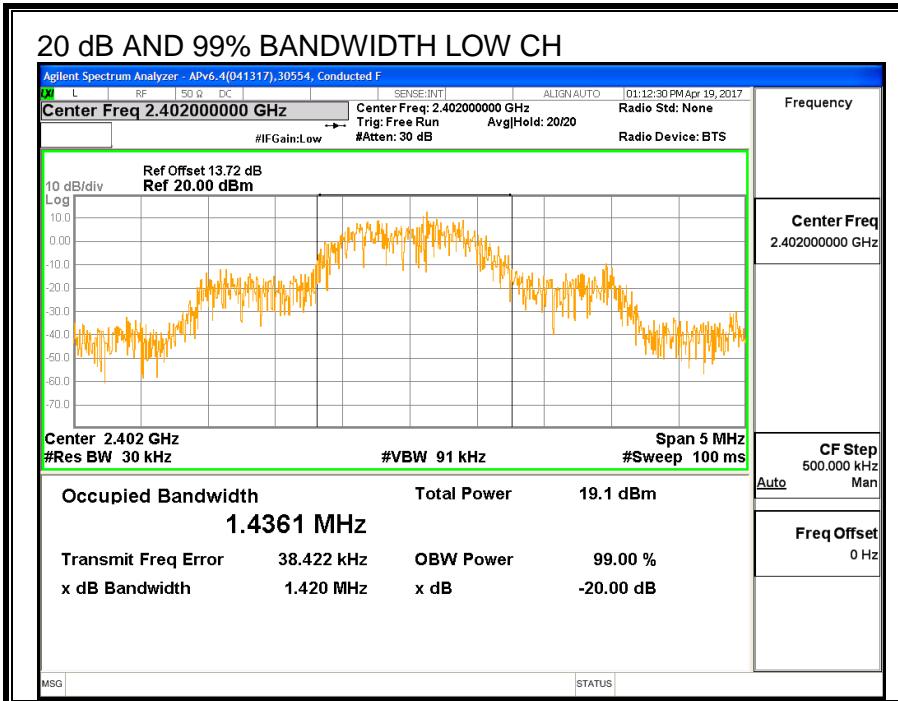

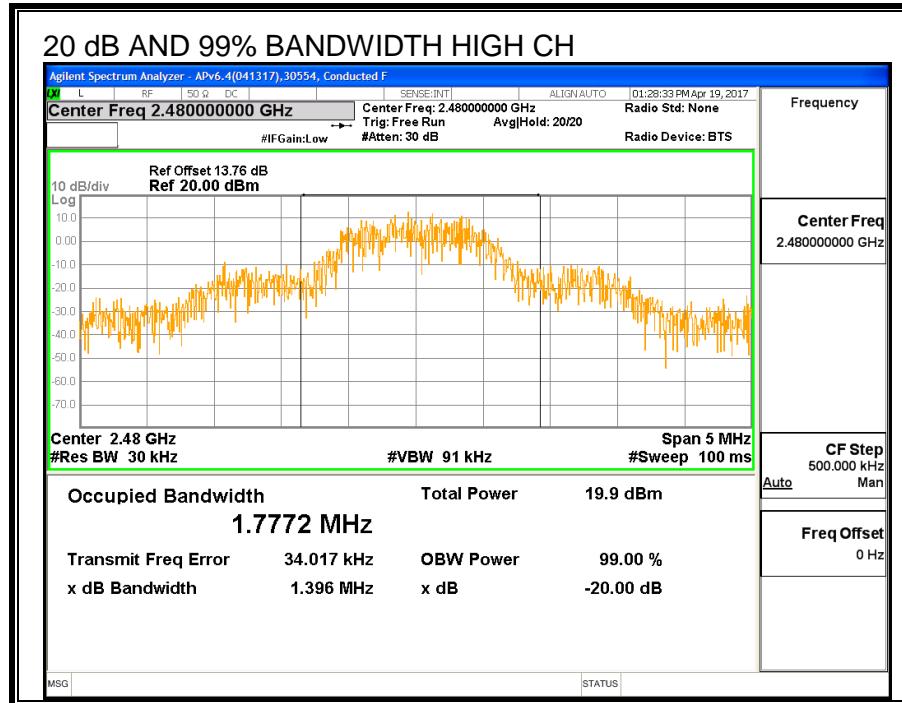

8.4.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (b)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

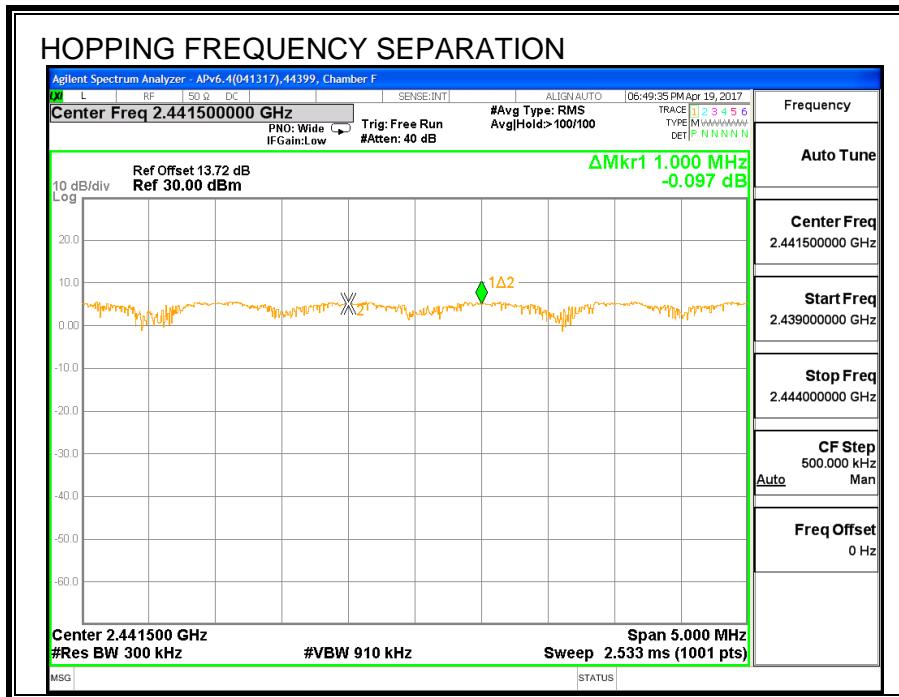

8.4.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

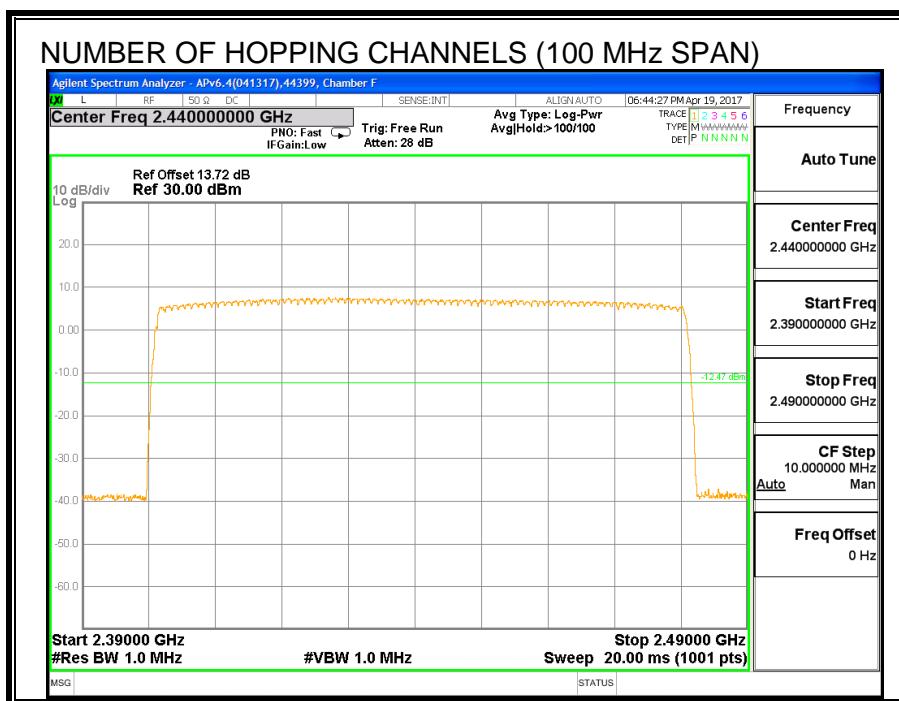


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)

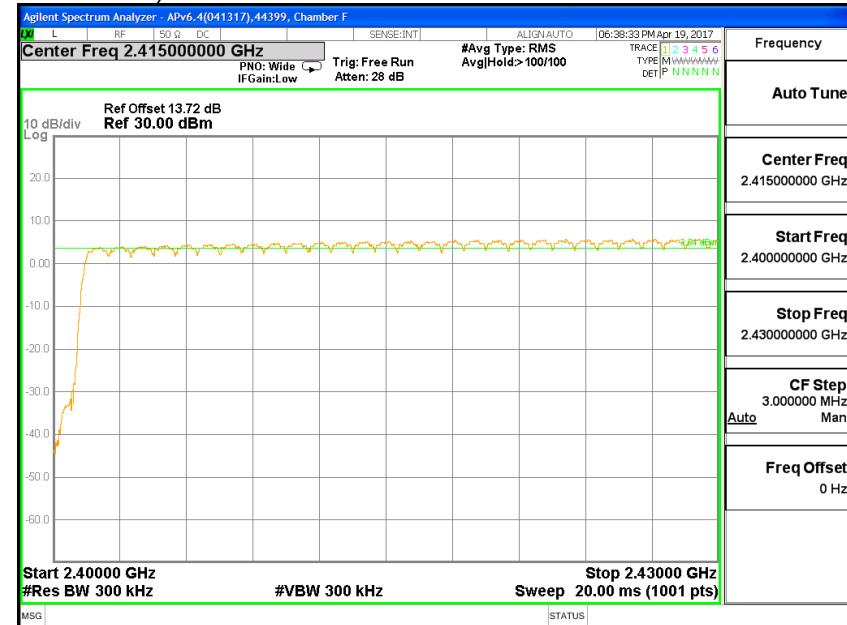

NUMBER OF HOPPING CHANNELS (30 MHz SPAN, SECOND SEGMENT)

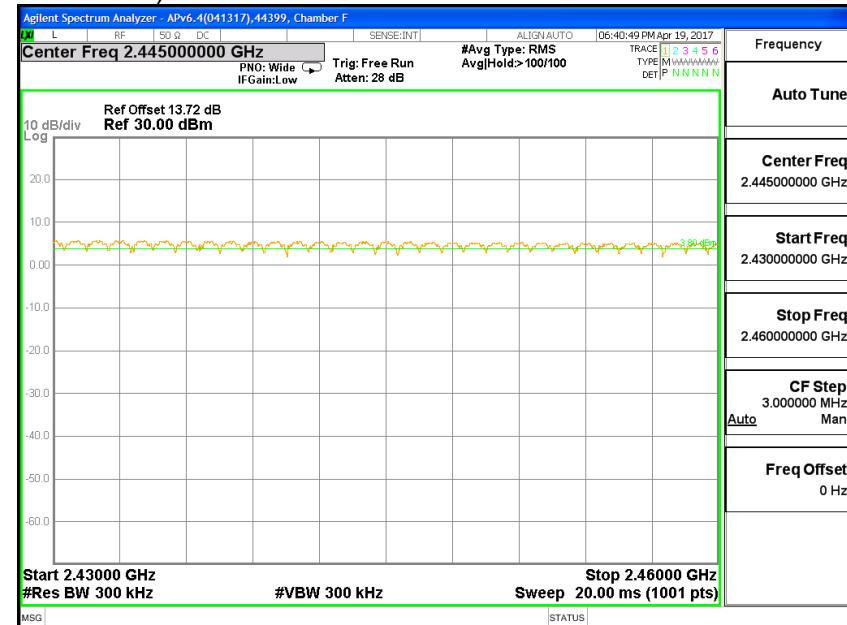

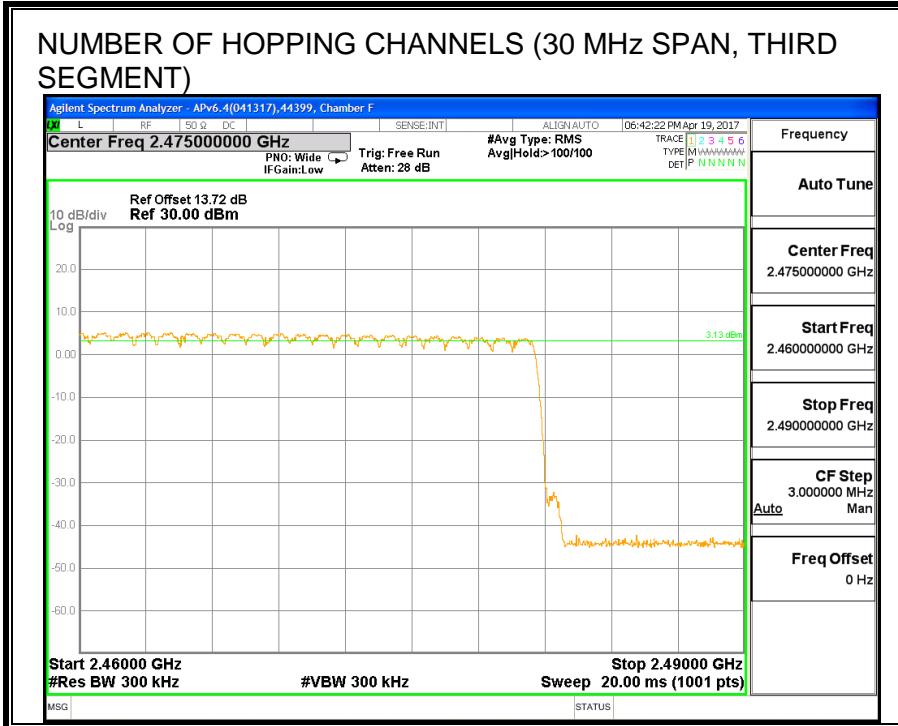

8.4.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK (EDR) Mode					
3DH1	0.3888	31	0.121	0.4	-0.279
3DH3	1.641	15	0.246	0.4	-0.154
3DH5	2.892	12	0.347	0.4	-0.053


PULSE WIDTH - 3DH1

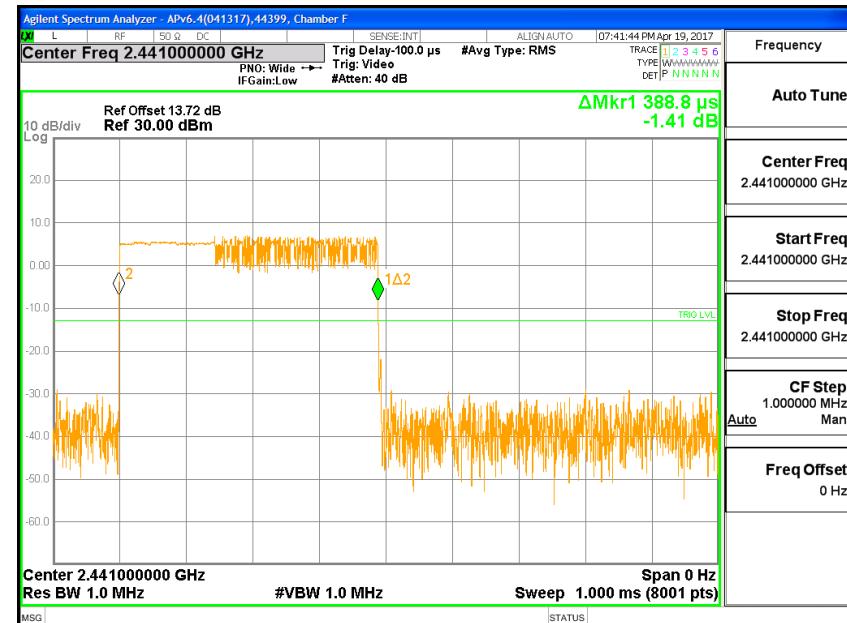


NUMBER OF PULSES - 3DH1

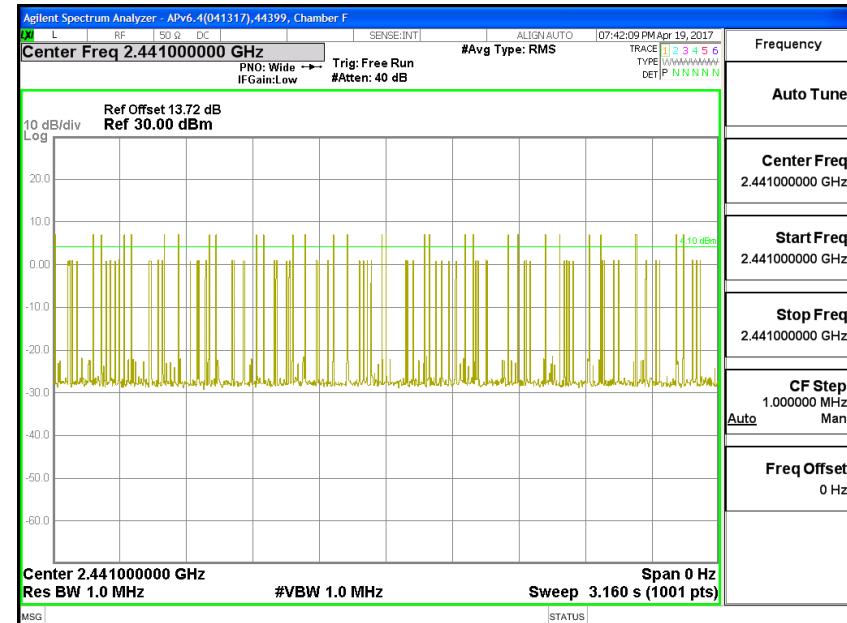


PULSE WIDTH - 3DH3

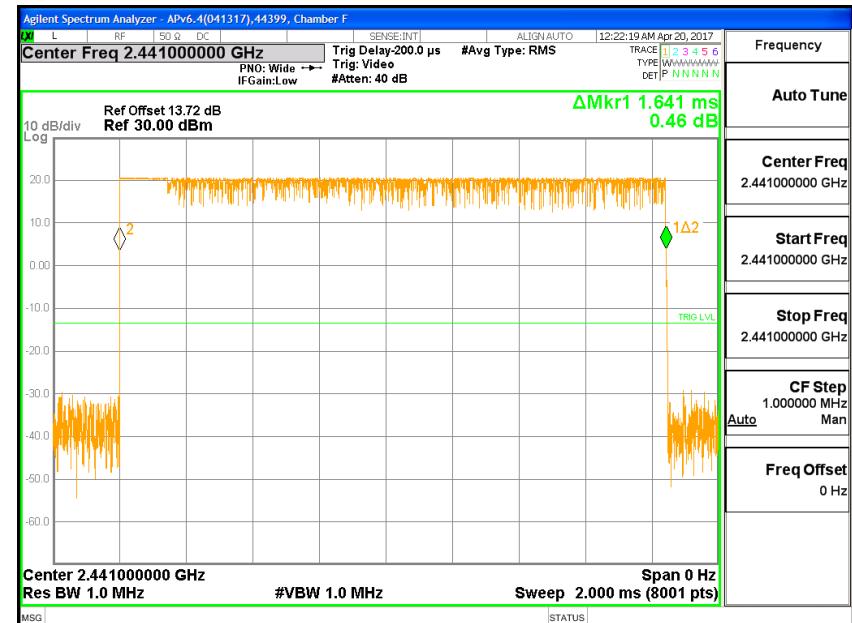


NUMBER OF PULSES - 3DH3

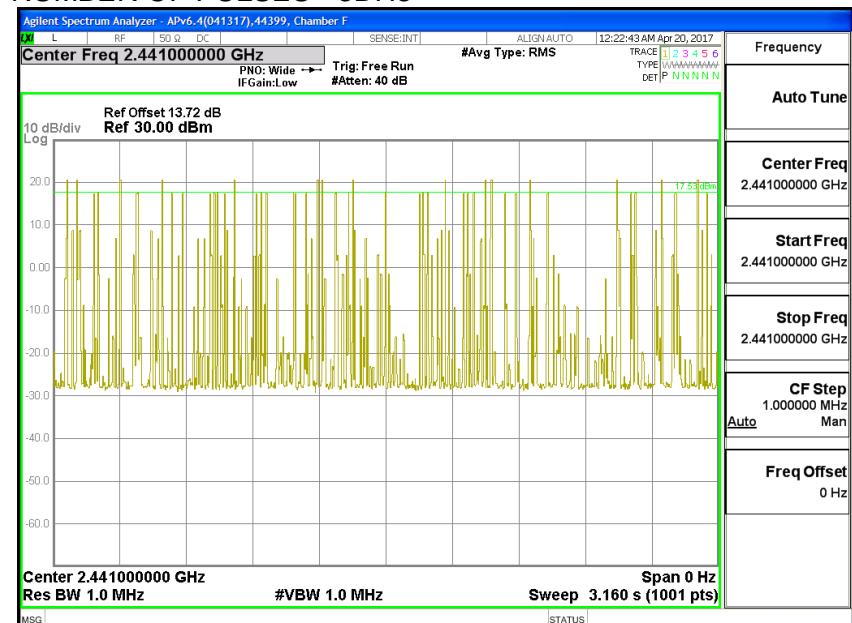

PULSE WIDTH - 3DH5

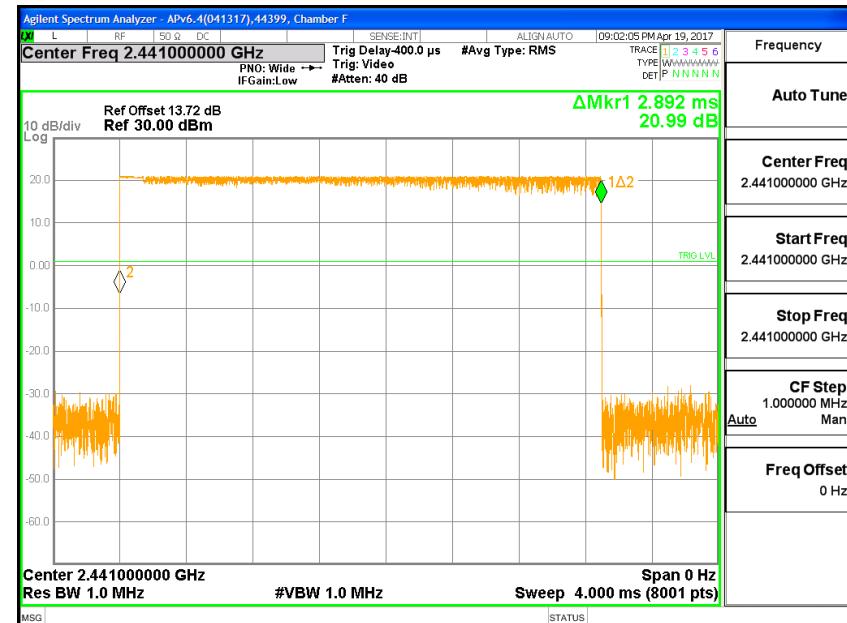

NUMBER OF PULSES - 3DH5

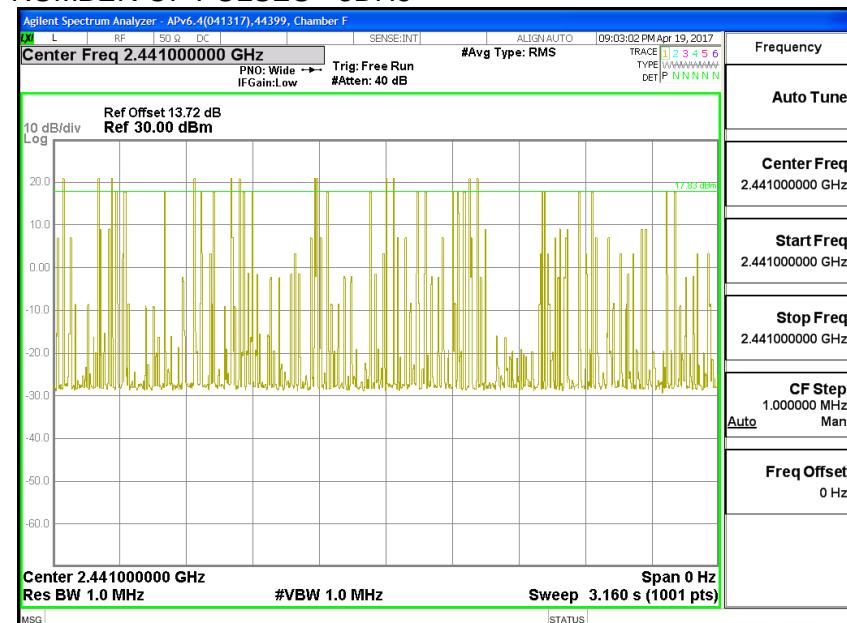

8.4.5. OUTPUT POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.15	21	-0.82
Middle	2441	20.19	21	-0.78
High	2480	20.17	21	-0.80

8.4.6. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	17.35
Middle	2441	17.48
High	2480	17.41

8.4.1. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

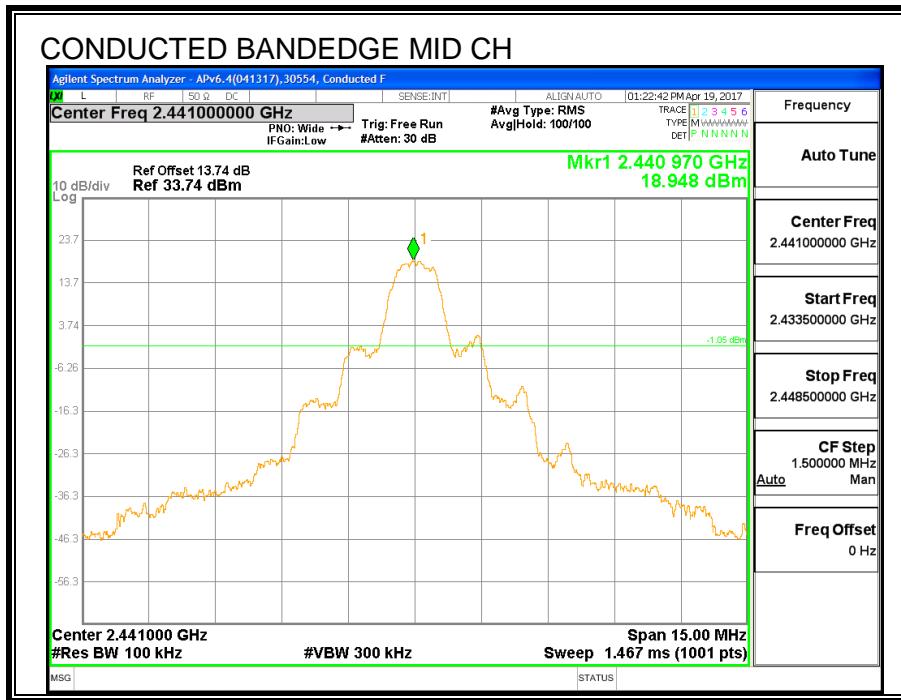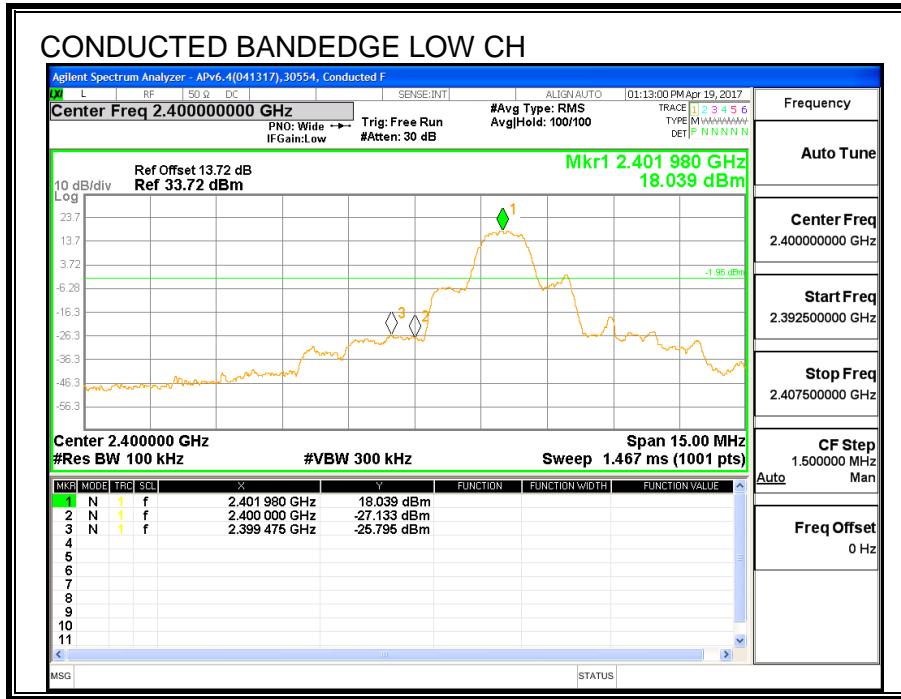

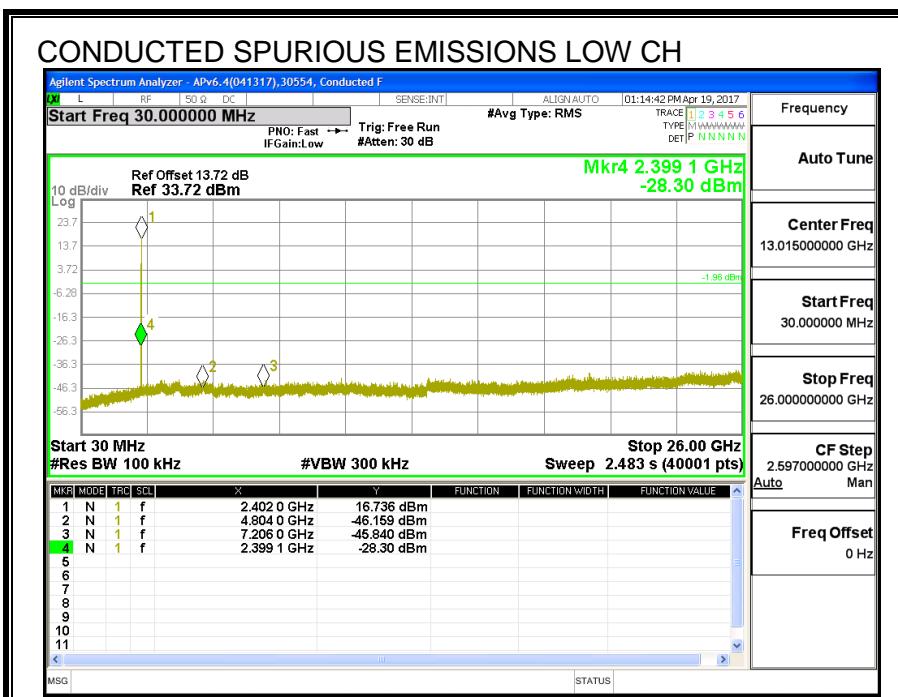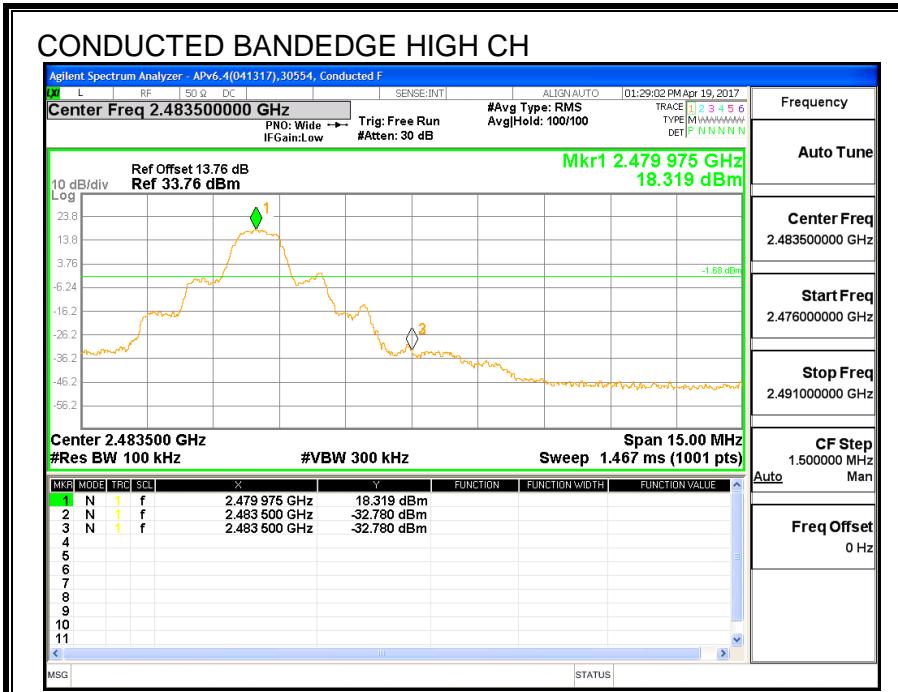

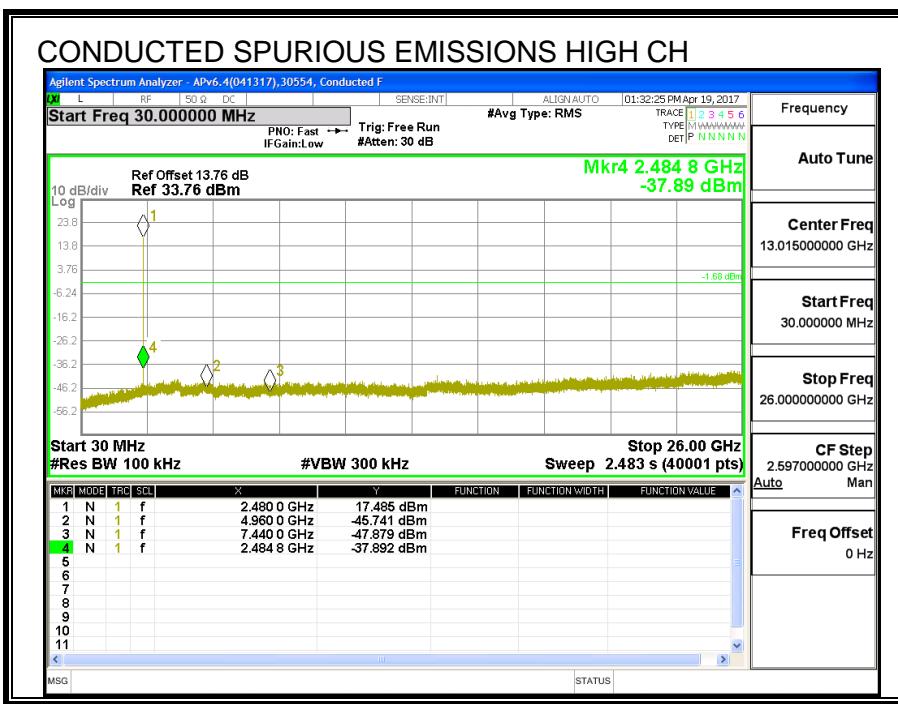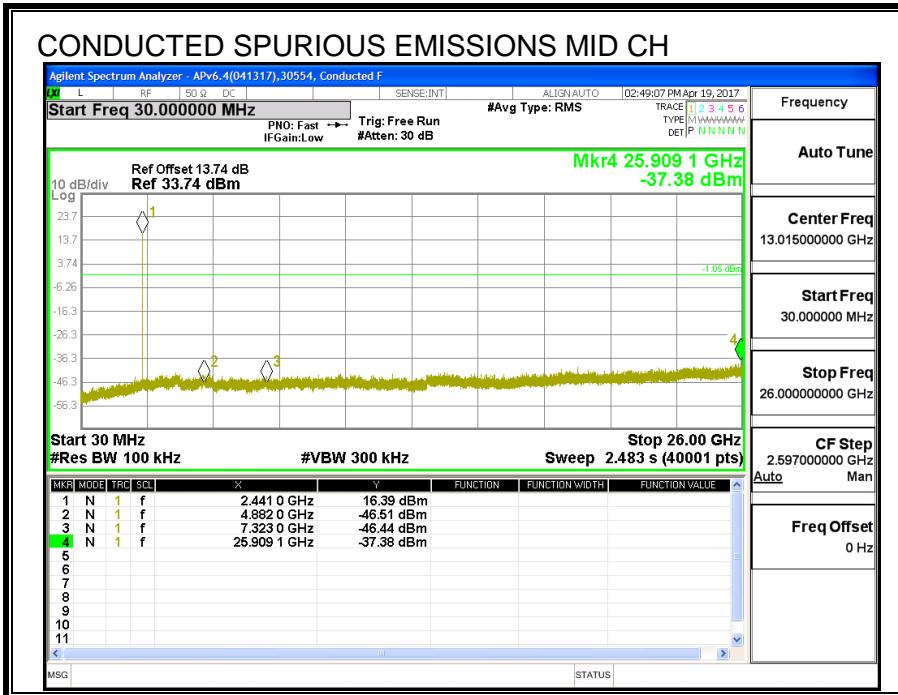

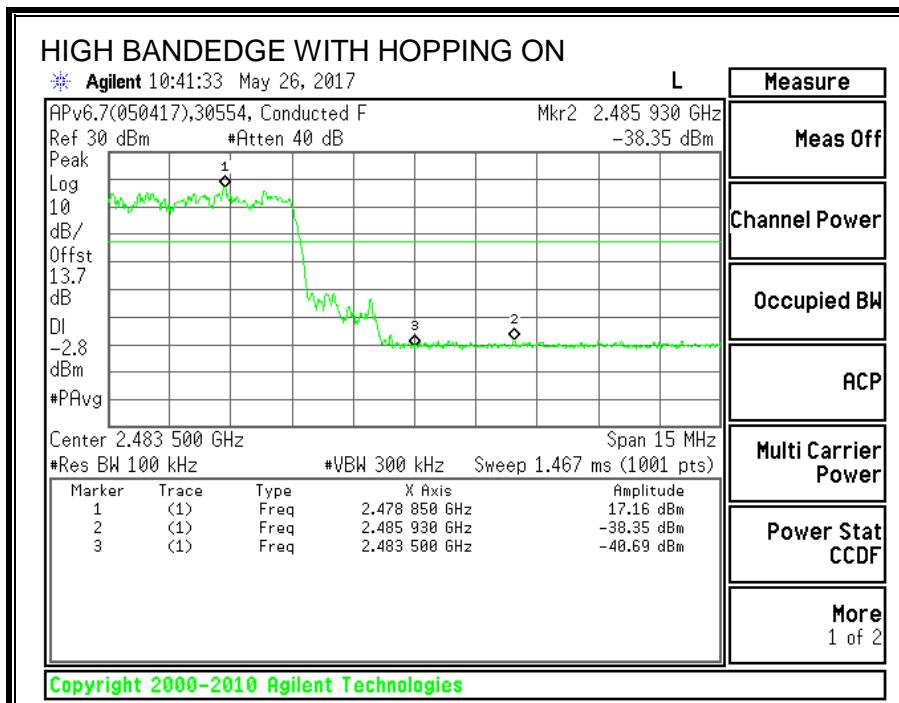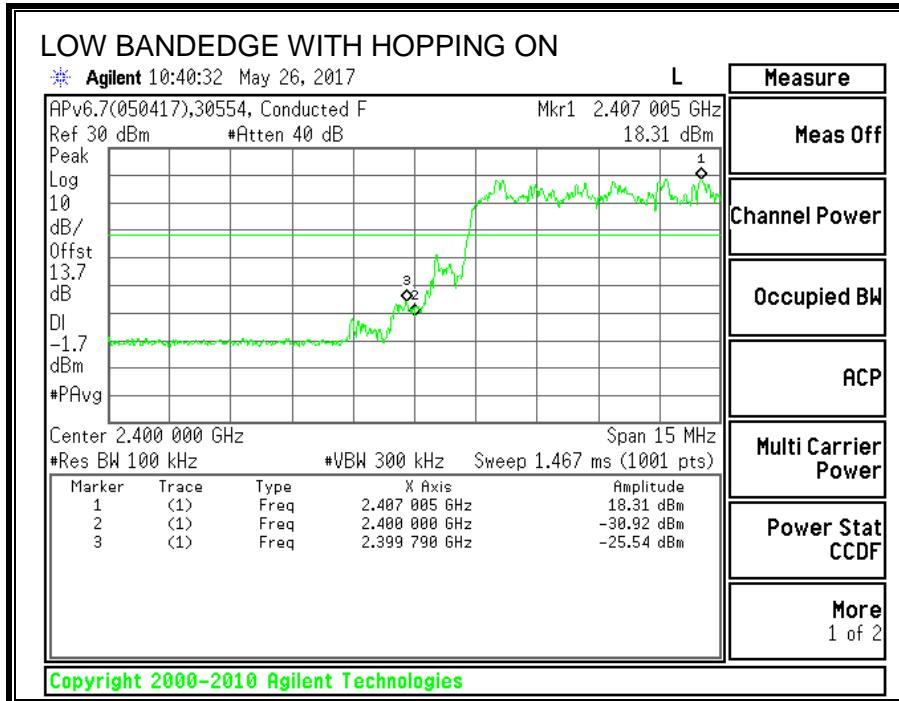

8.5. UAT 1, Plow BASIC DATA RATE GFSK MODULATION

8.5.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (KHz)	20 dB Bandwidth (KHz)
Low	2402	917.05	941.05
Middle	2441	892.22	927.10
High	2480	855.71	842.40

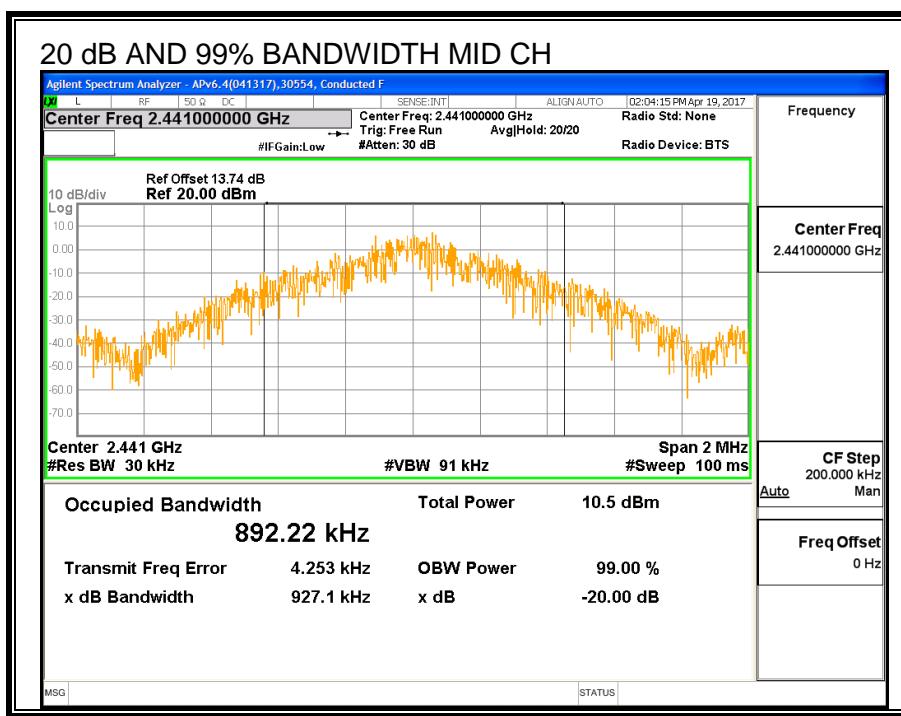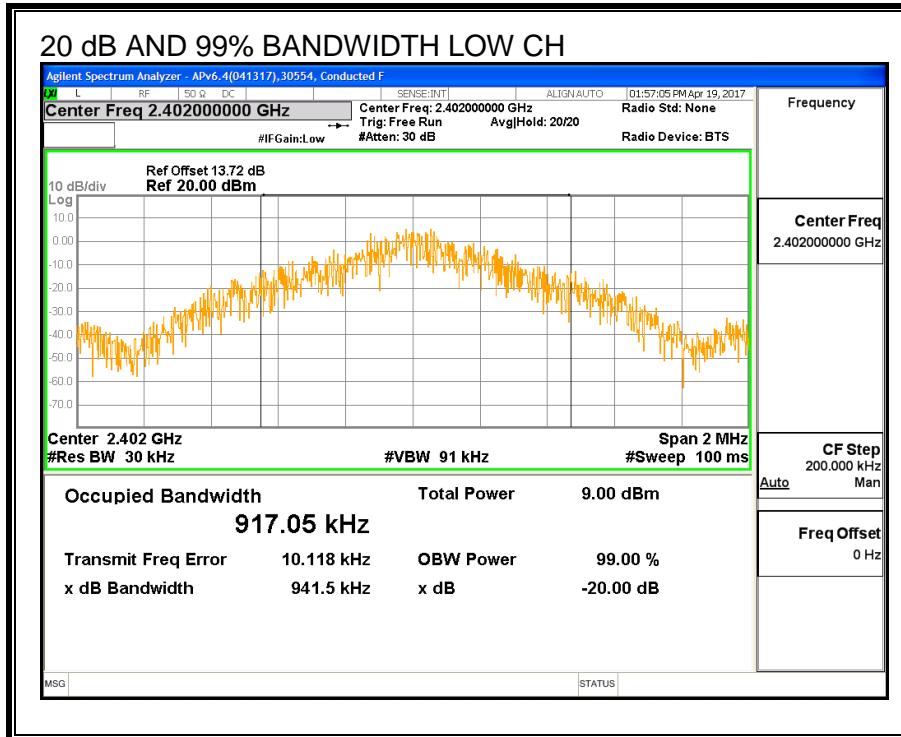

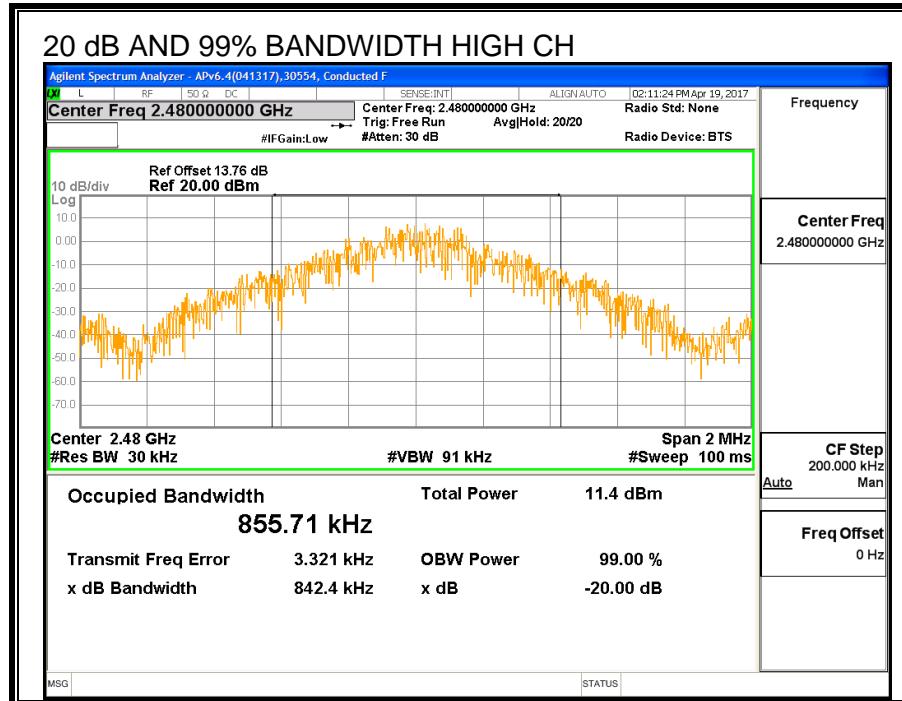

8.5.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (b)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

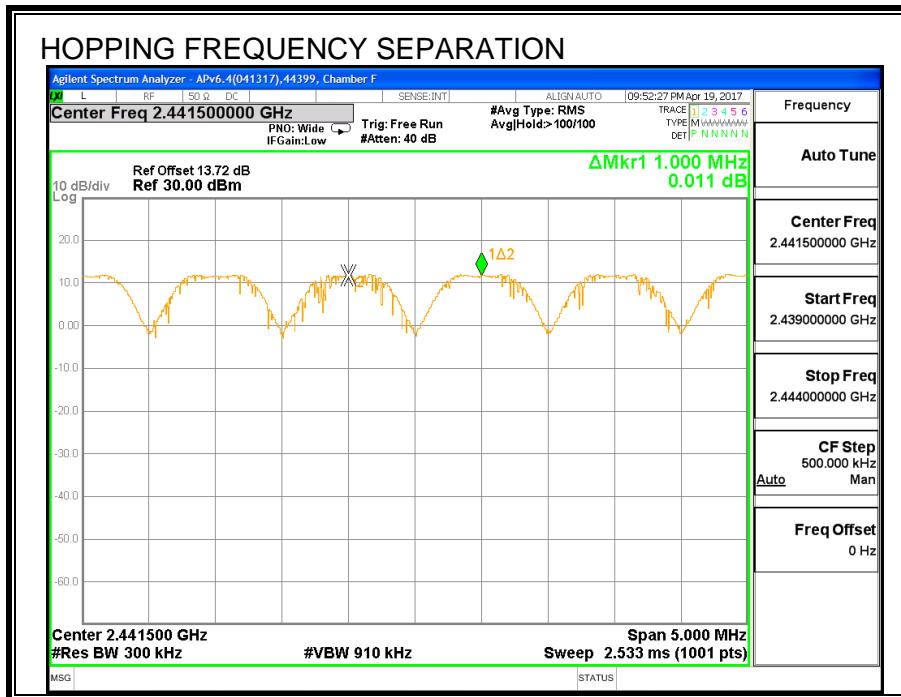

8.5.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

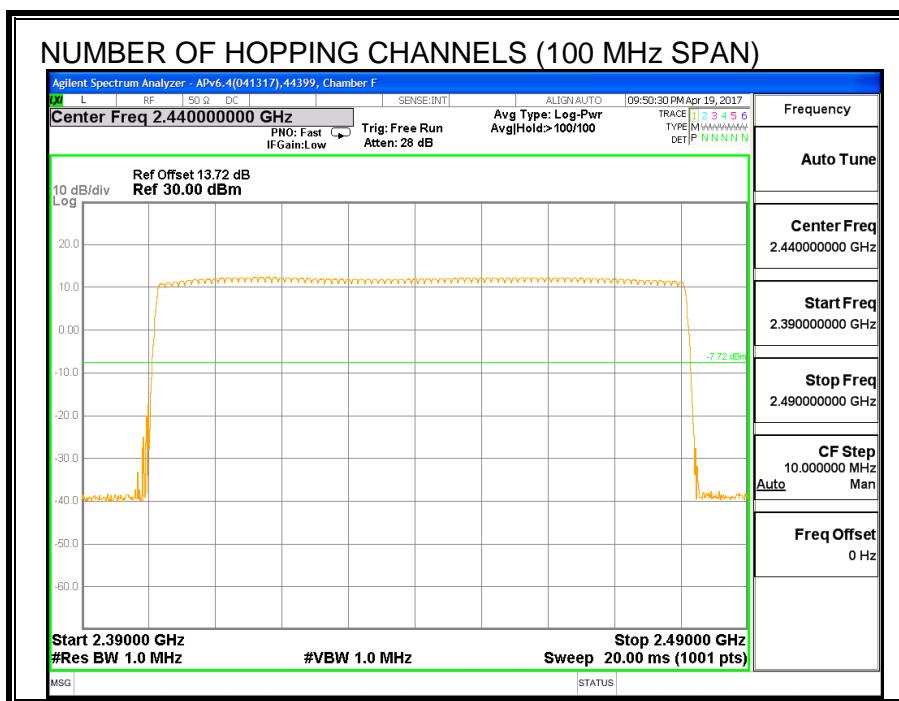


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)



NUMBER OF HOPPING CHANNELS (30 MHz SPAN, SECOND SEGMENT)

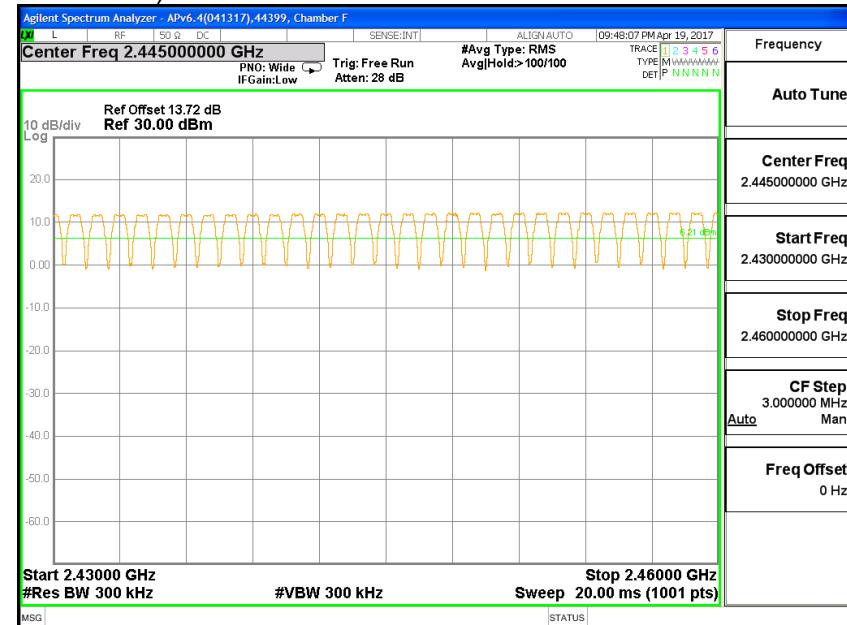

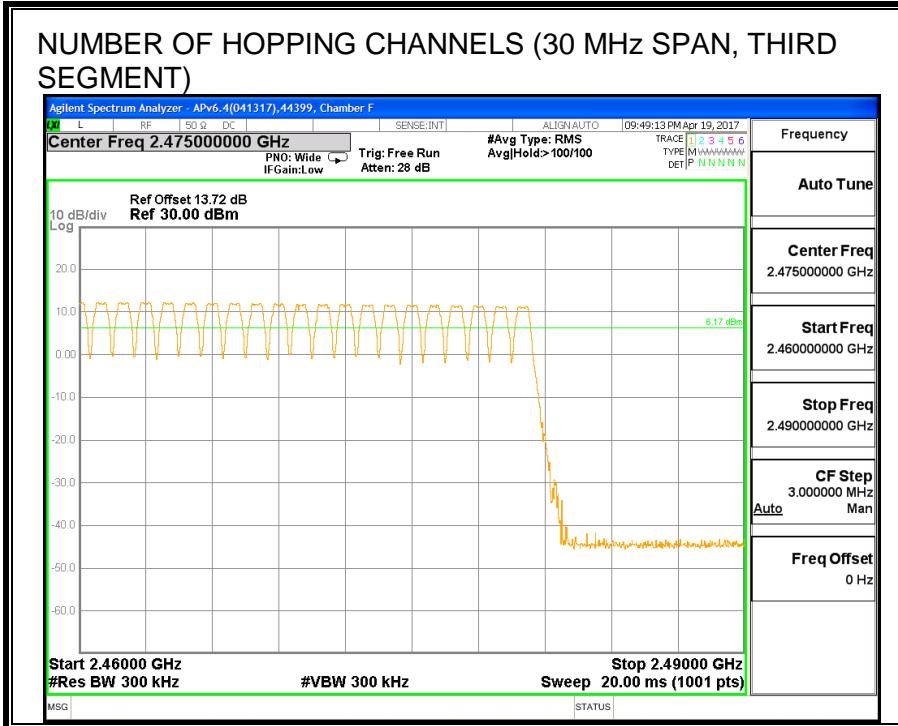

8.5.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.383	32	0.123	0.4	-0.277
DH3	1.639	16	0.262	0.4	-0.138
DH5	2.887	11	0.318	0.4	-0.082
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.383	8	0.031	0.4	-0.369
DH3	1.639	4	0.066	0.4	-0.334
DH5	2.887	2.75	0.079	0.4	-0.321


PULSE WIDTH - DH1

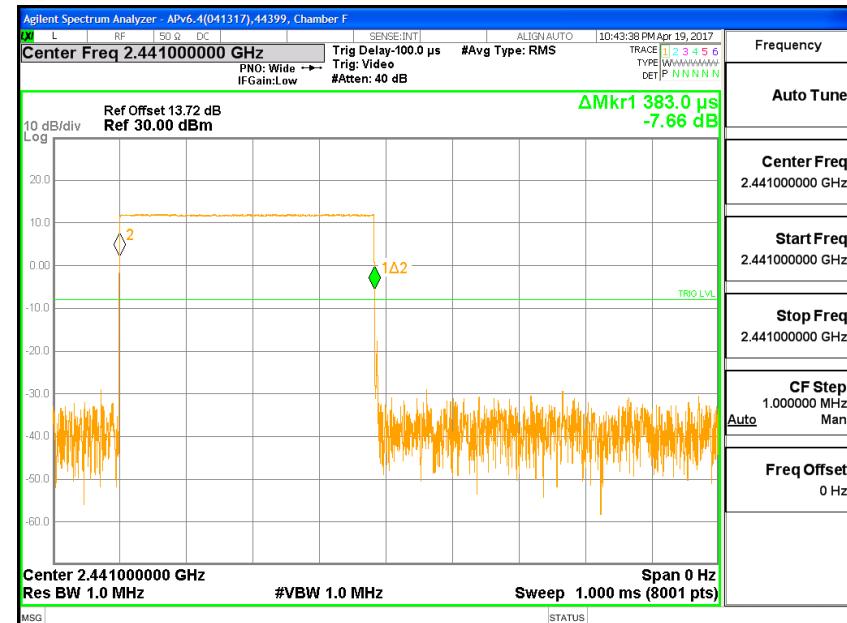


NUMBER OF PULSES - DH1




PULSE WIDTH - DH3

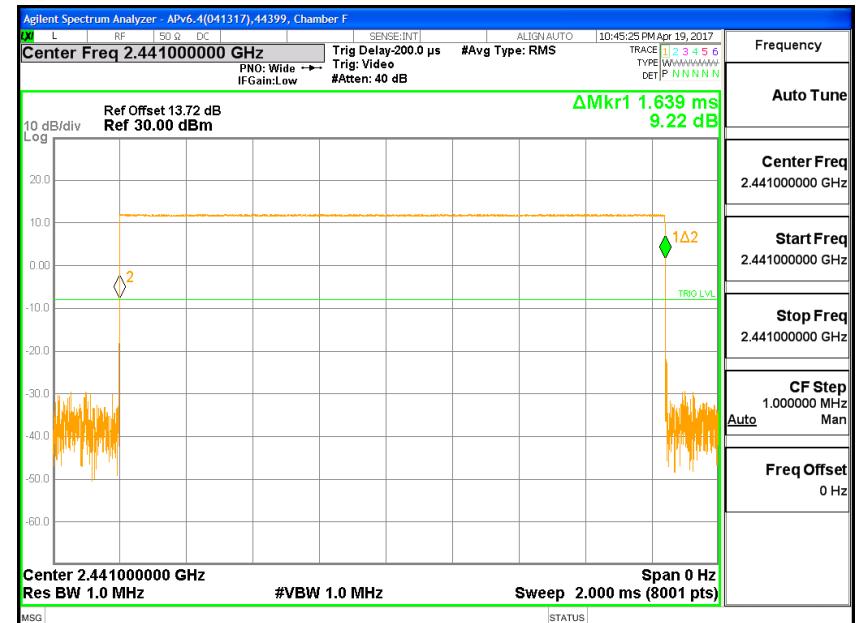


NUMBER OF PULSES - DH3

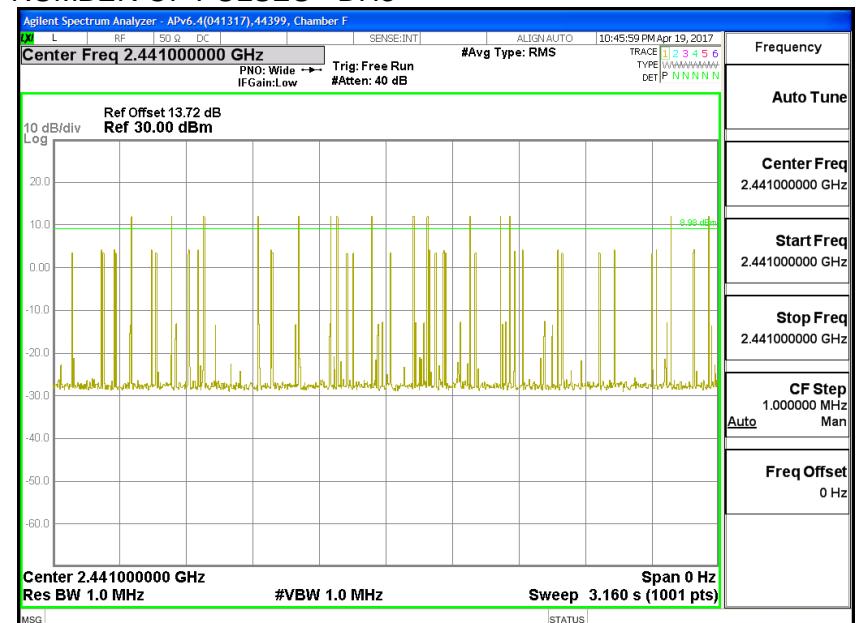

PULSE WIDTH - DH5

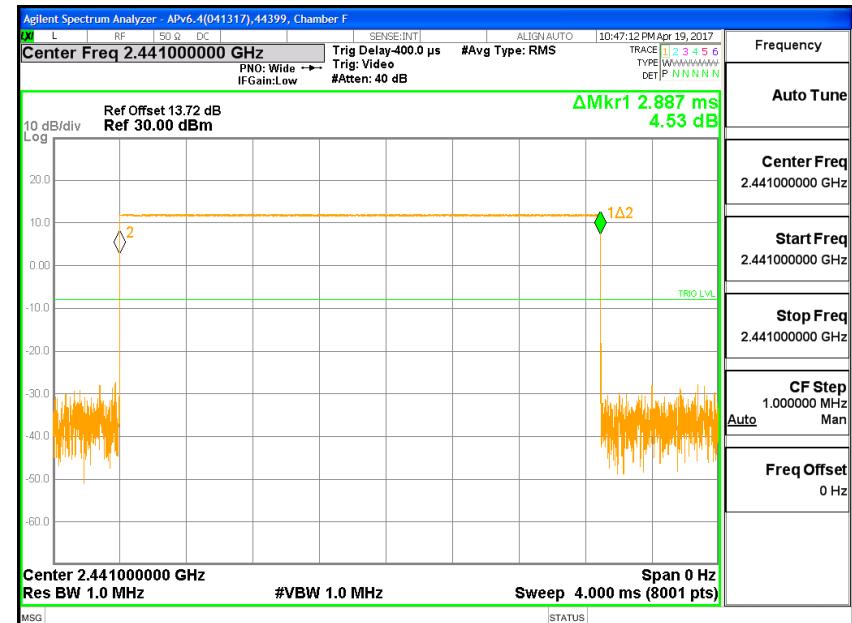

NUMBER OF PULSES - DH5

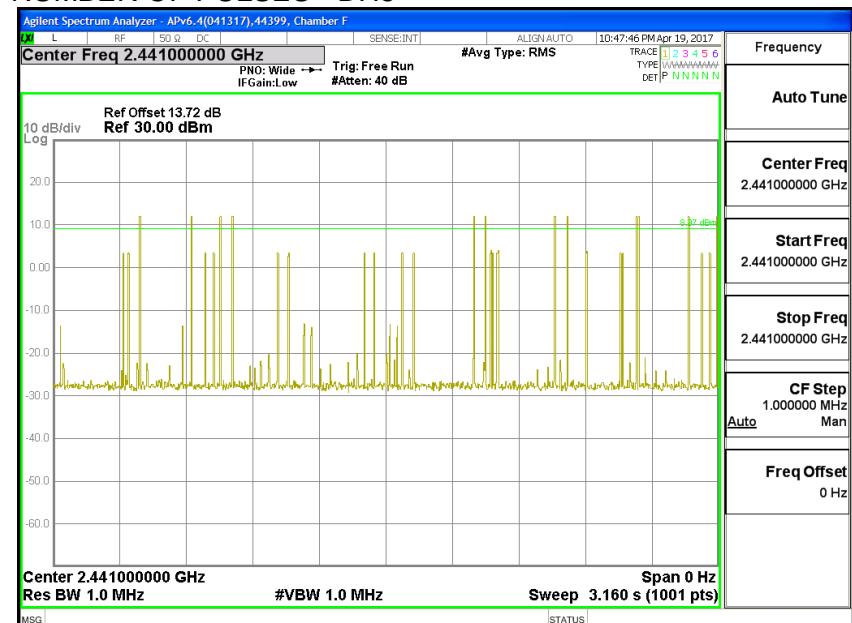

8.5.5. OUTPUT POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.75	30	-20.25
Middle	2441	10.31	30	-19.69
High	2480	10.19	30	-19.81

8.5.6. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.40
Middle	2441	9.90
High	2480	9.86

8.5.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

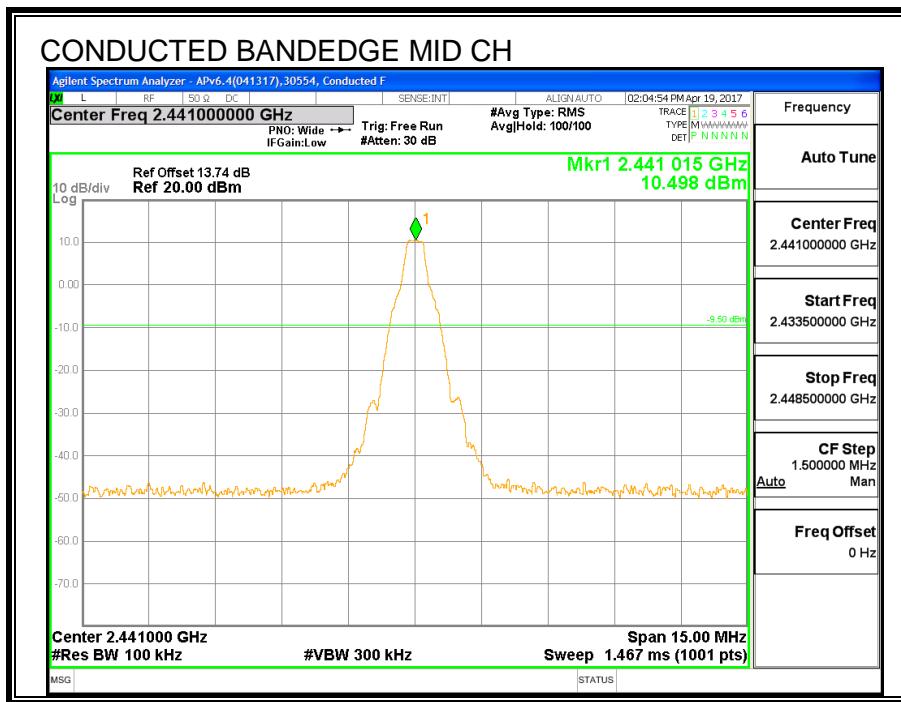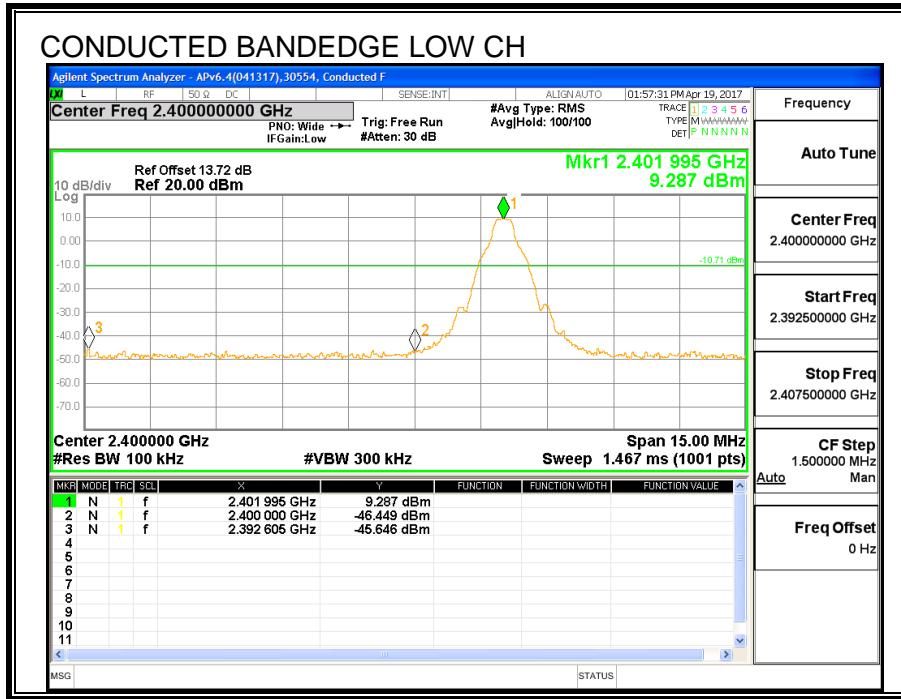

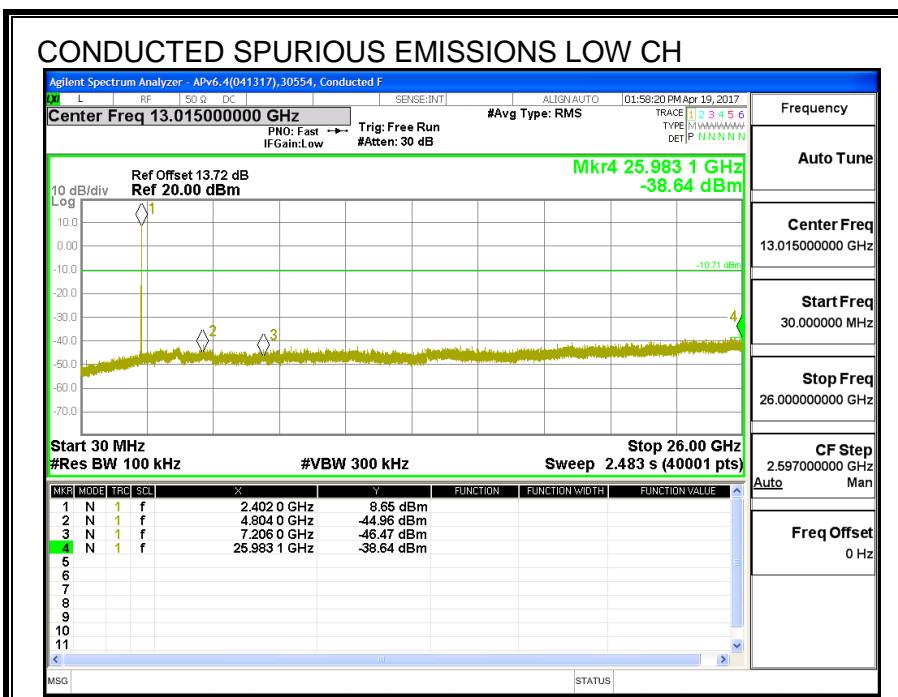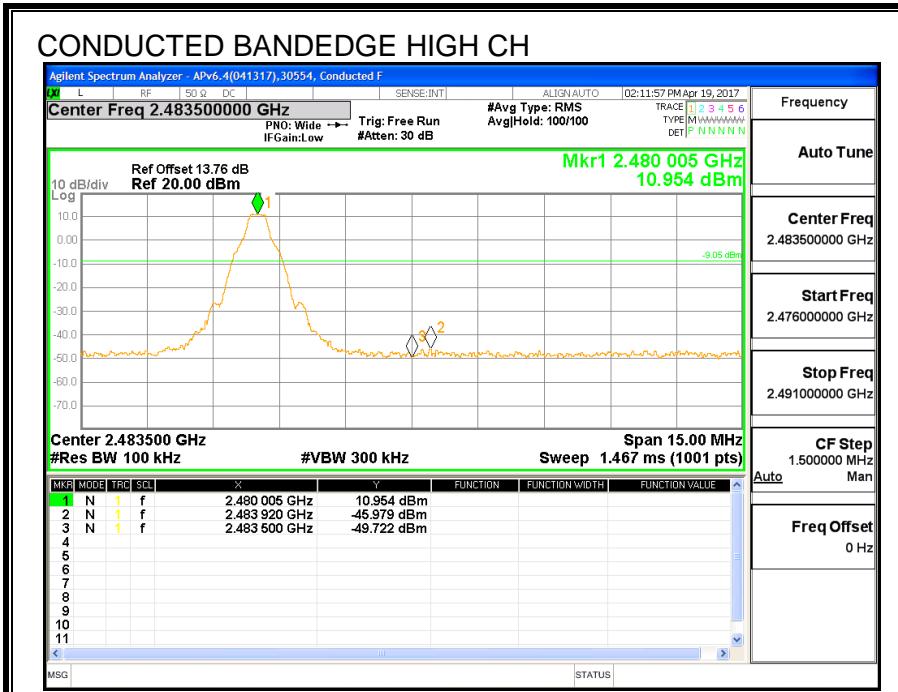

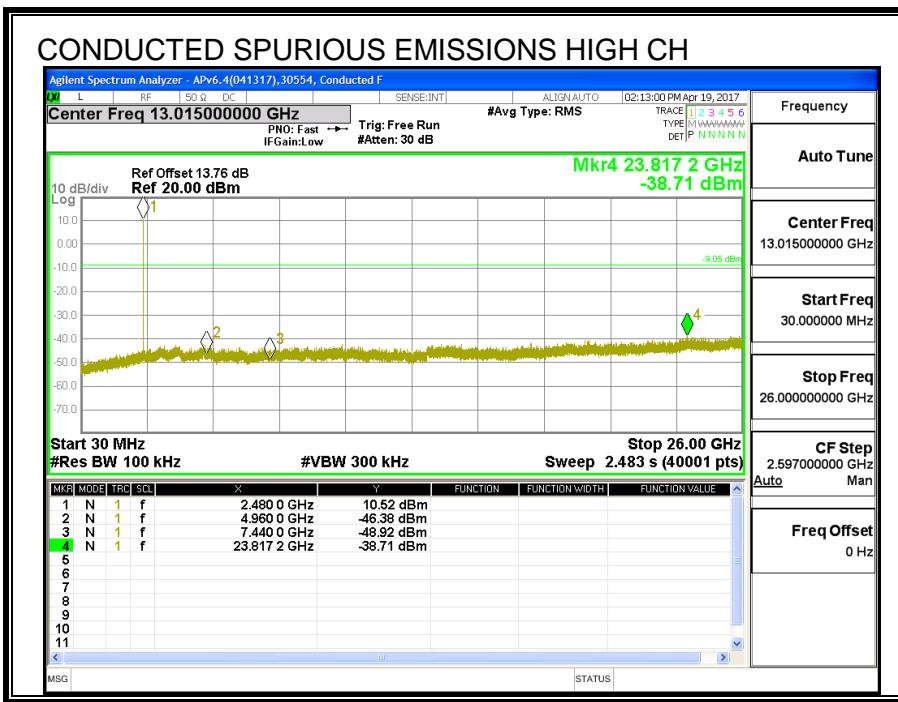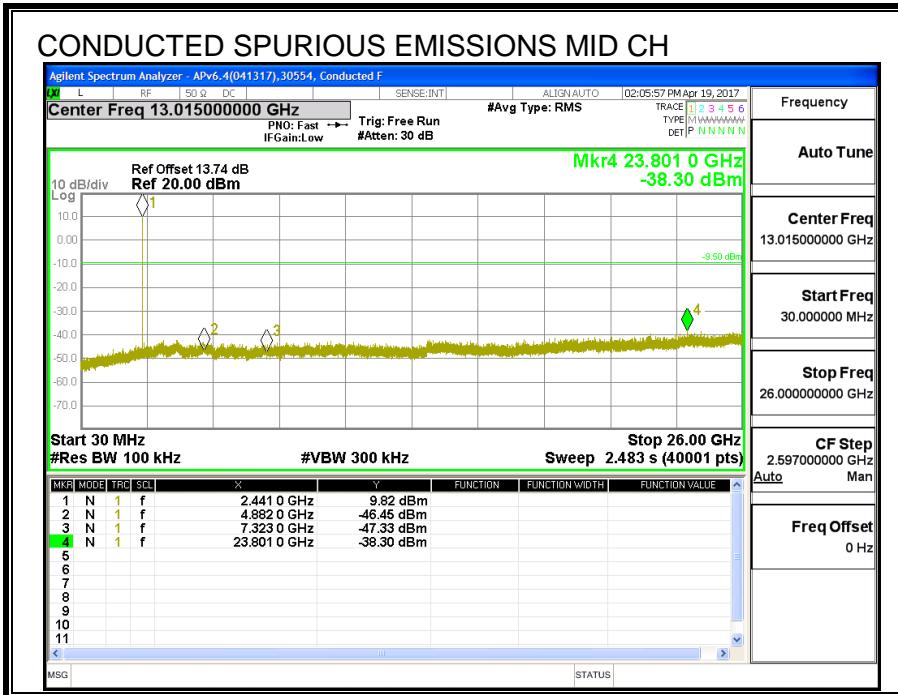

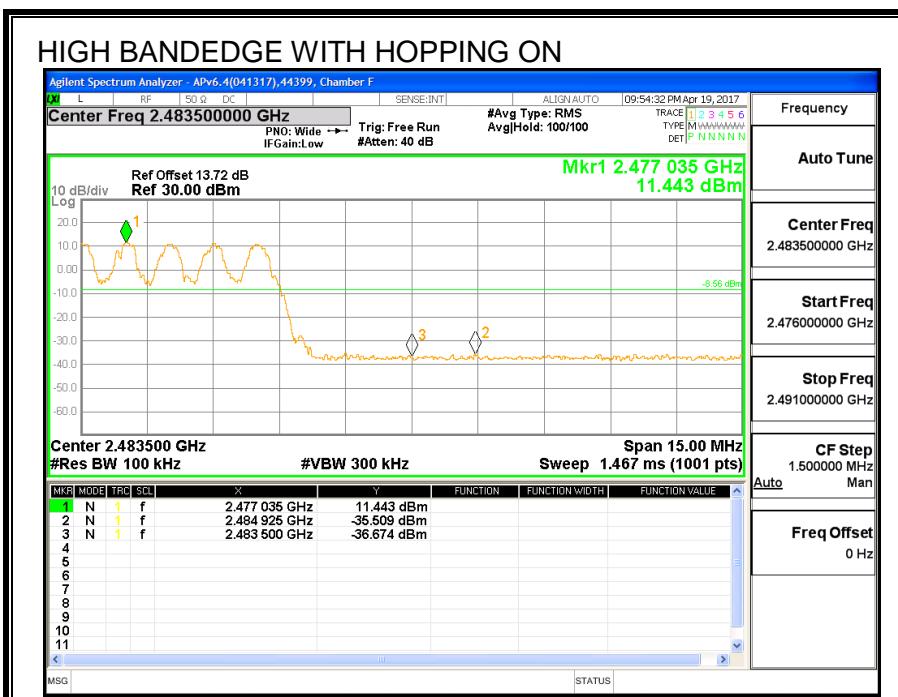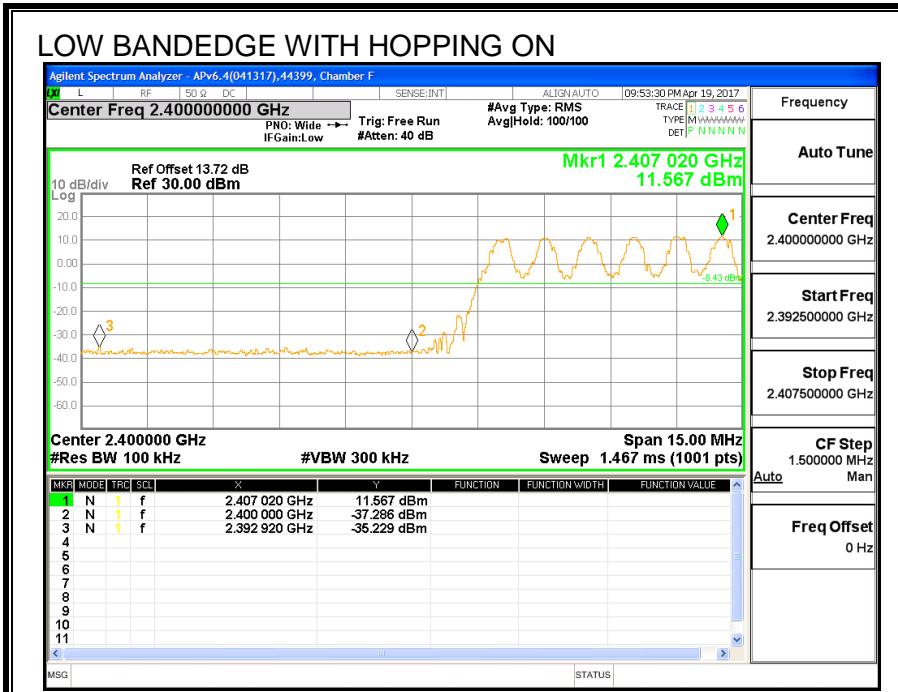

8.6. UAT 1, Plow ENHANCED DATA RATE DQPSK MODULATION

8.6.1. OUTPUT POWER

ID:	44353	Date:	7/14/2017
-----	-------	-------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.23	21	-10.74
Middle	2441	10.41	21	-10.56
High	2480	10.19	21	-10.78

8.6.2. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.84
Middle	2441	7.93
High	2480	7.69

8.7. UAT 1, Plow ENHANCED DATA RATE 8PSK MODULATION

8.7.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.2584	1.378
Middle	2441	1.2524	1.379
High	2480	1.2570	1.359

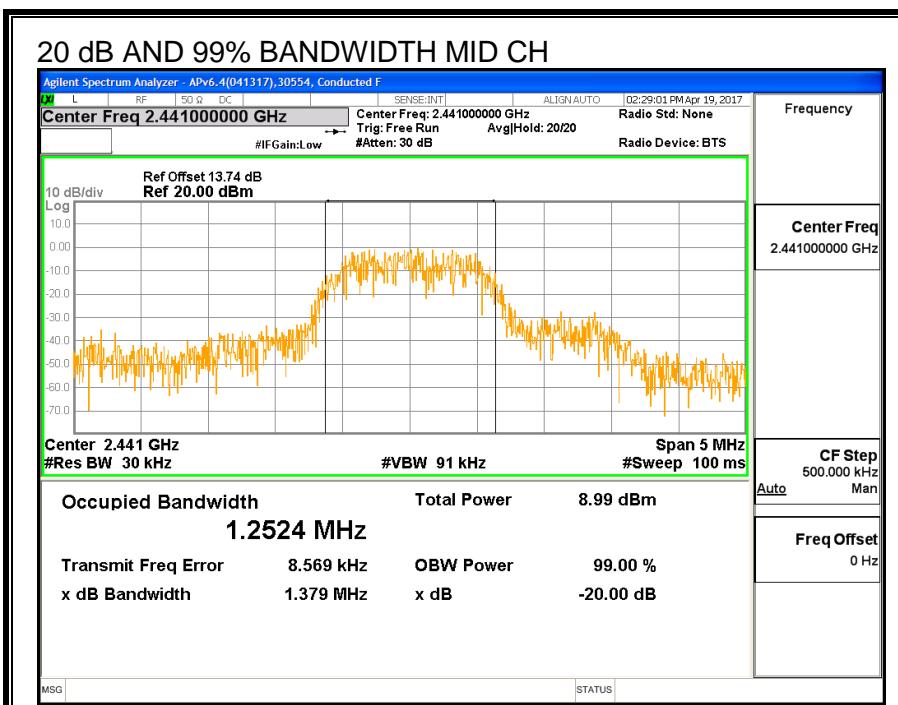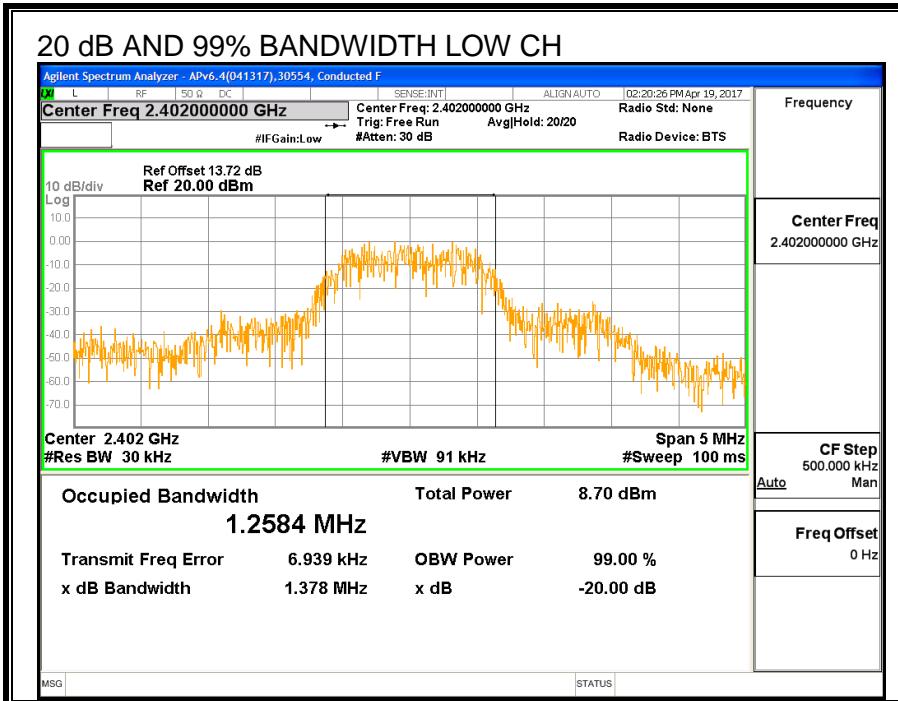

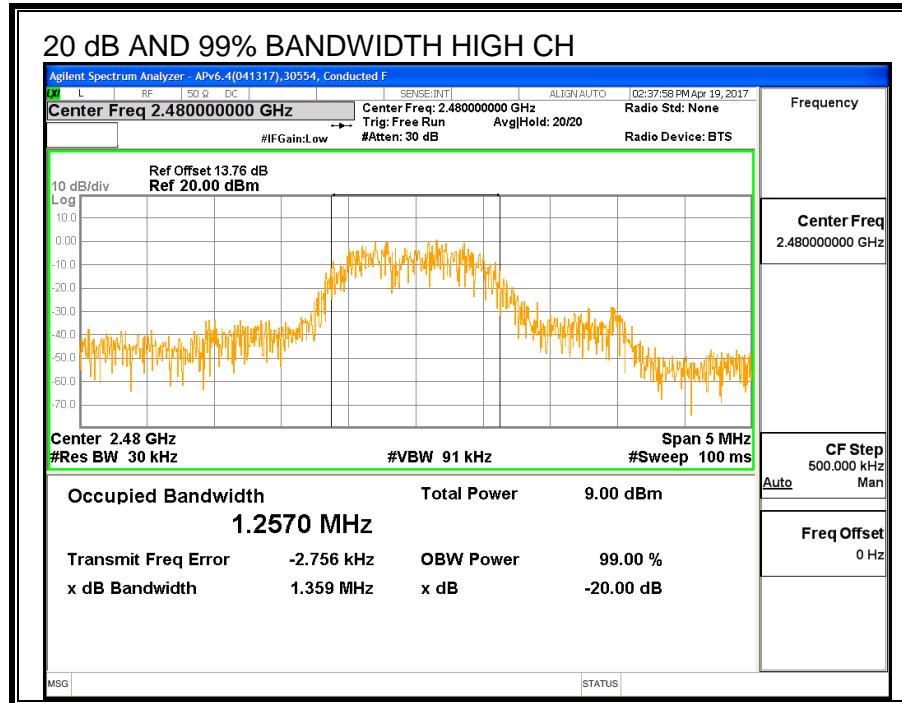

8.7.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (b)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

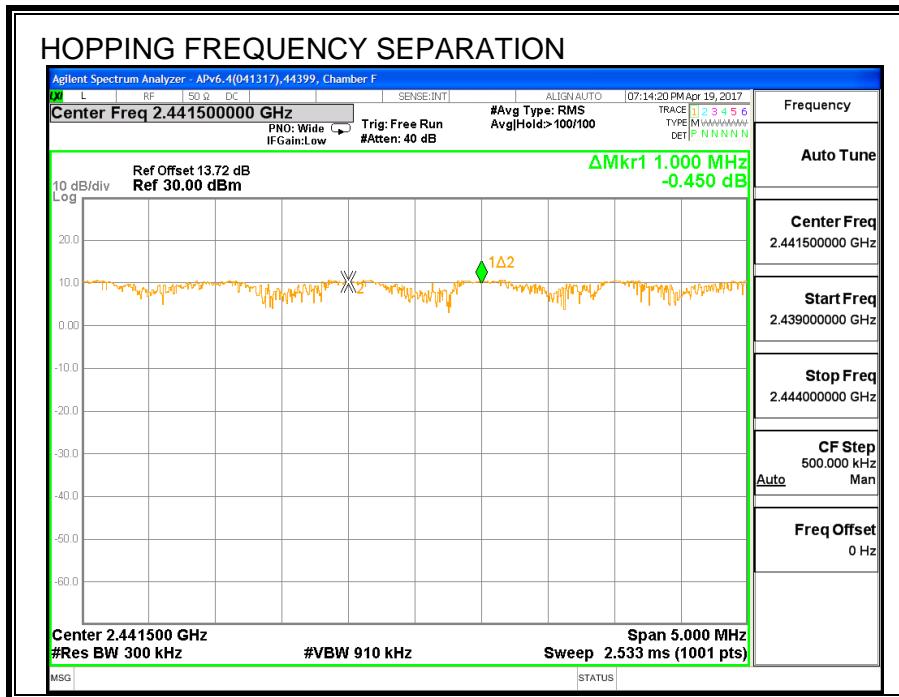

8.7.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

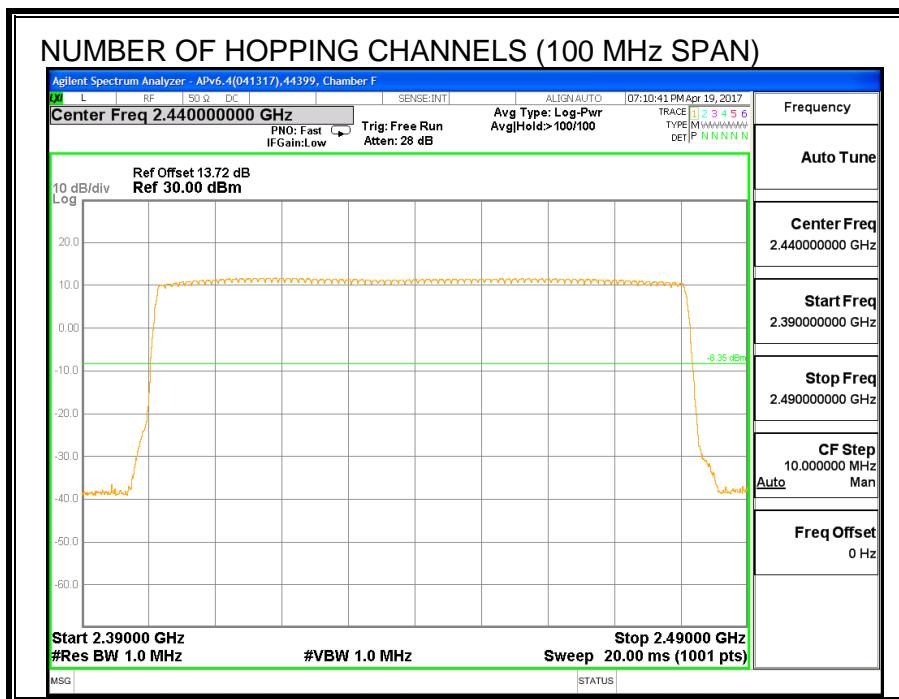


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)

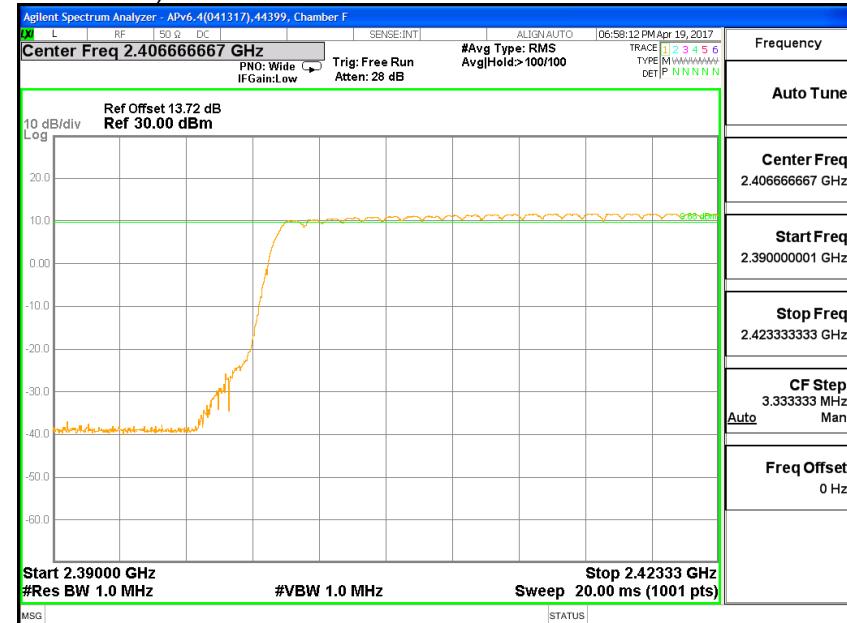

NUMBER OF HOPPING CHANNELS (30 MHz SPAN, SECOND SEGMENT)

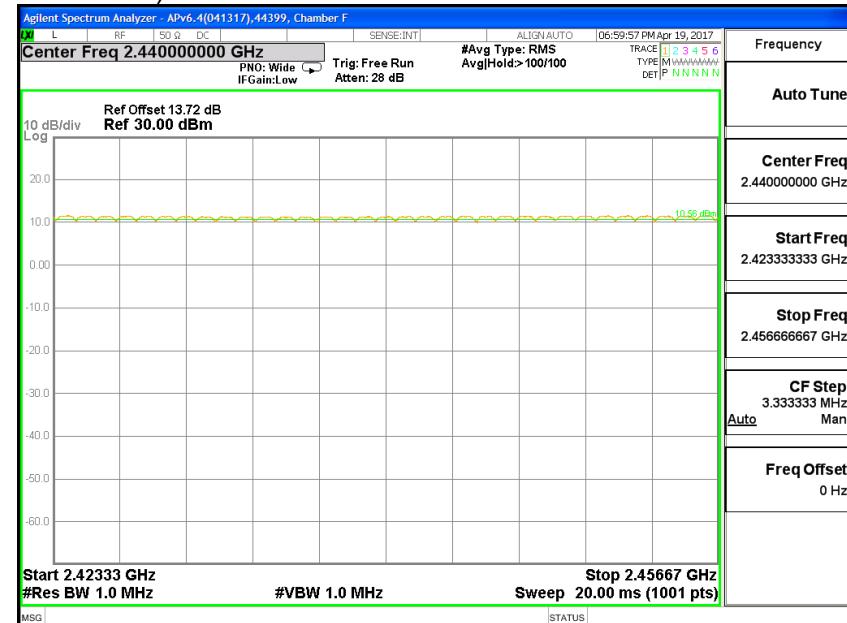

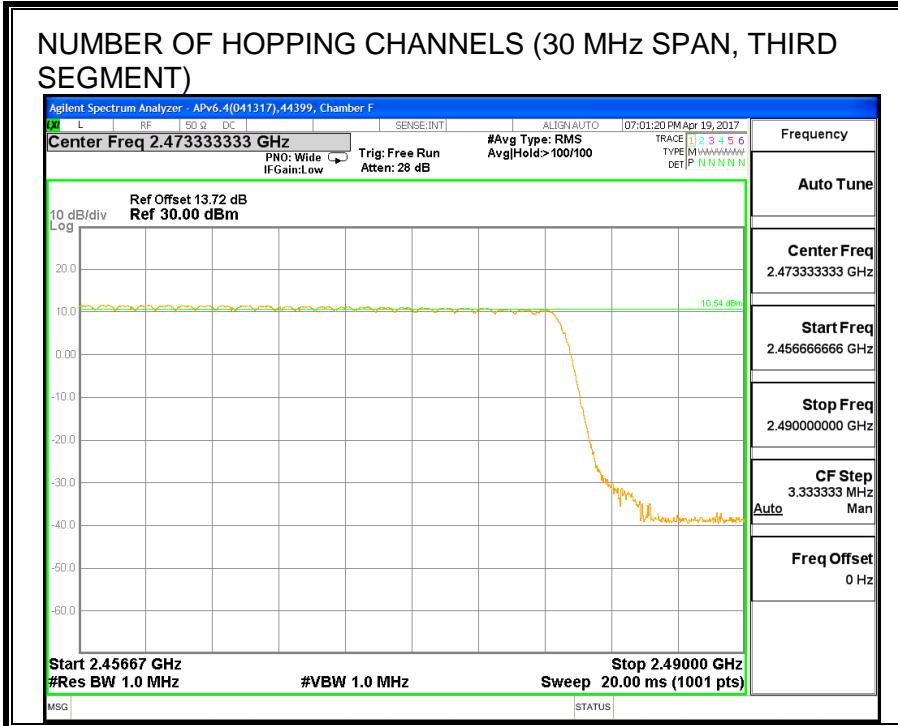

8.7.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS



DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK (EDR) Mode					
3DH1	0.3888	31	0.121	0.4	-0.279
3DH3	1.640	16	0.262	0.4	-0.138
3DH5	2.892	13	0.376	0.4	-0.024

PULSE WIDTH - 3DH1

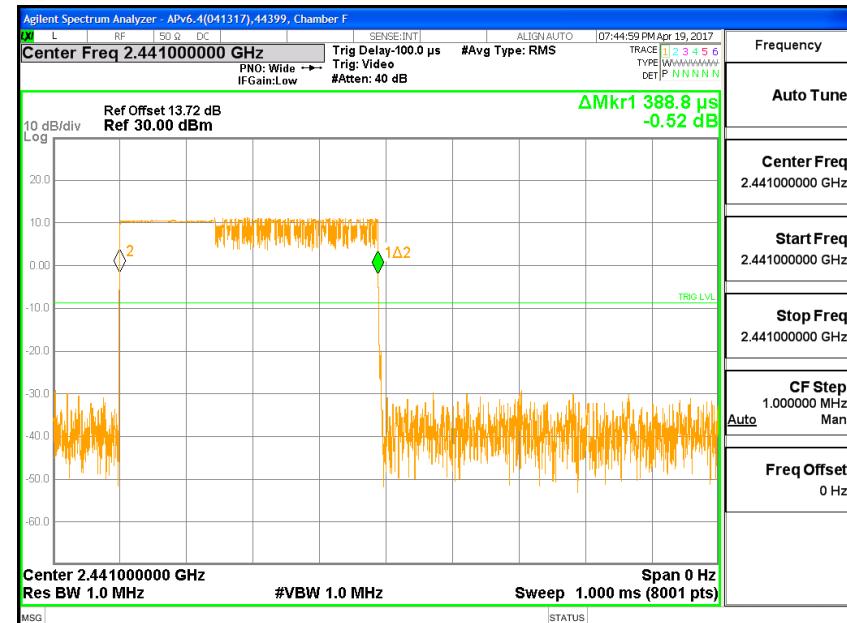


NUMBER OF PULSES - 3DH1




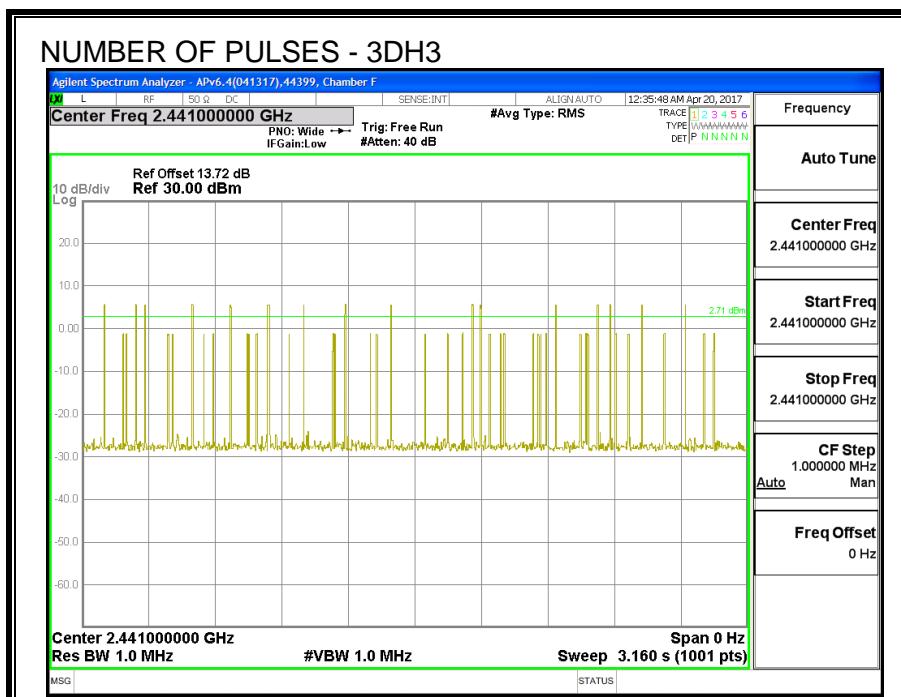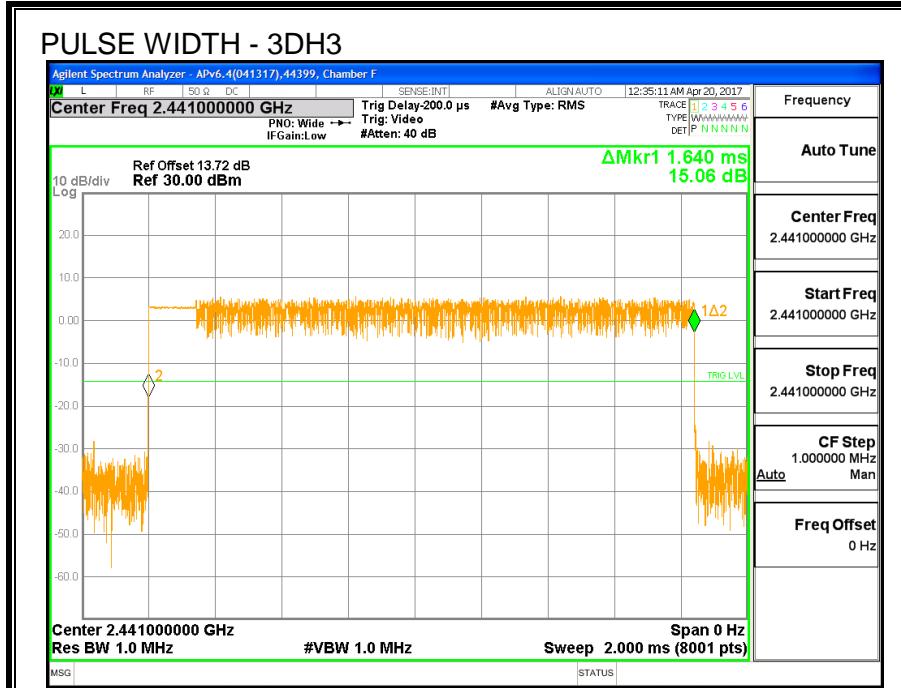

PULSE WIDTH - 3DH5

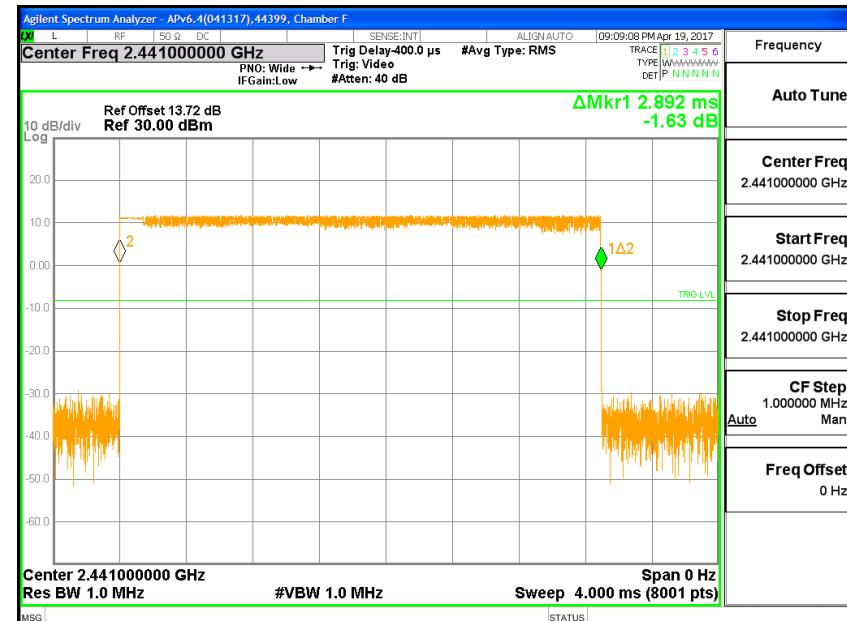

NUMBER OF PULSES - 3DH5

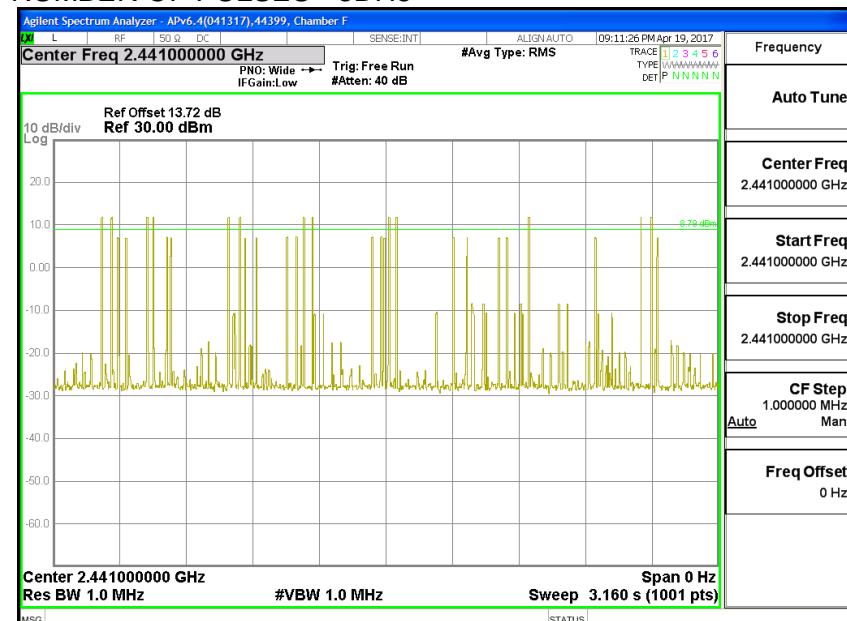

8.7.5. OUTPUT POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.21	21	-10.76
Middle	2441	10.44	21	-10.53
High	2480	10.22	21	-10.75

8.7.6. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.86
Middle	2441	7.81
High	2480	7.85

8.7.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

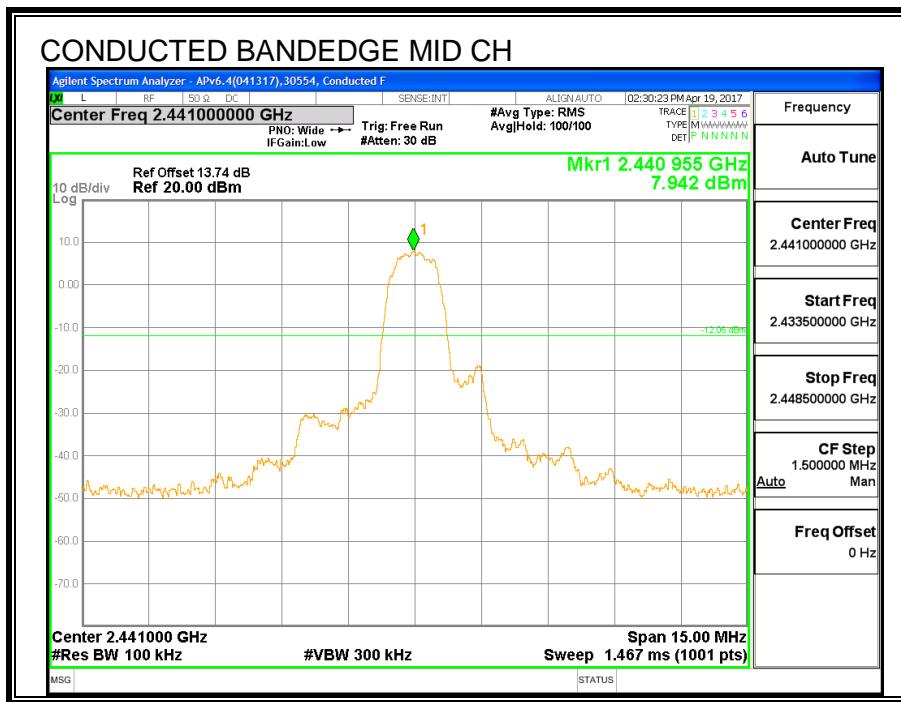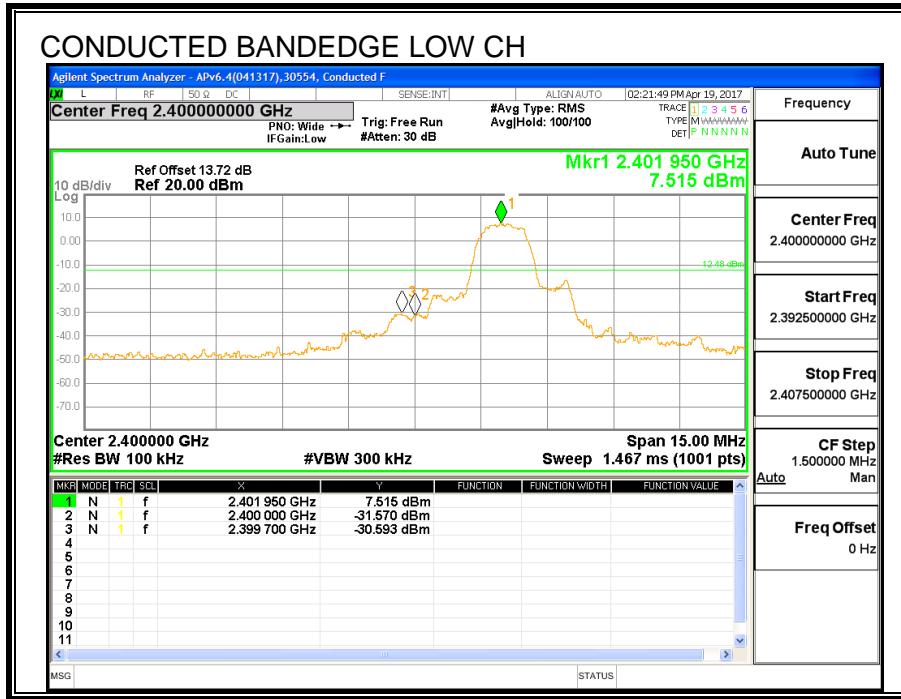

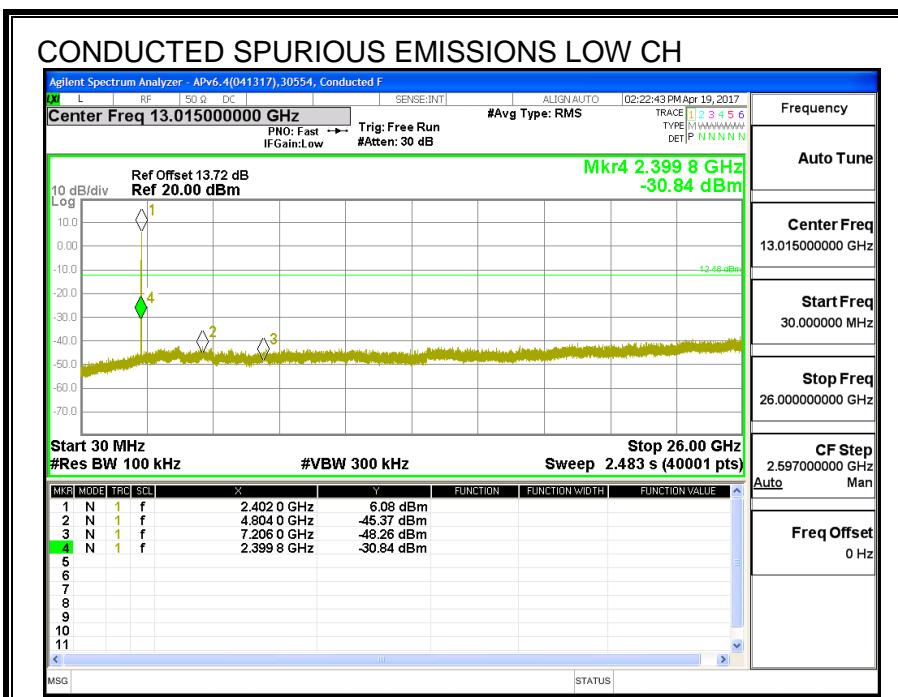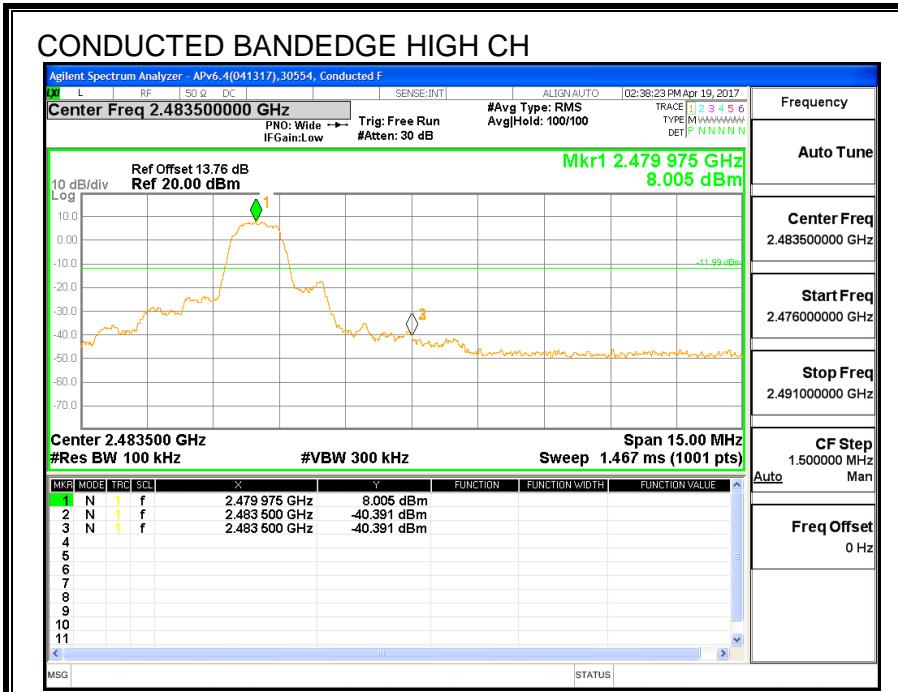

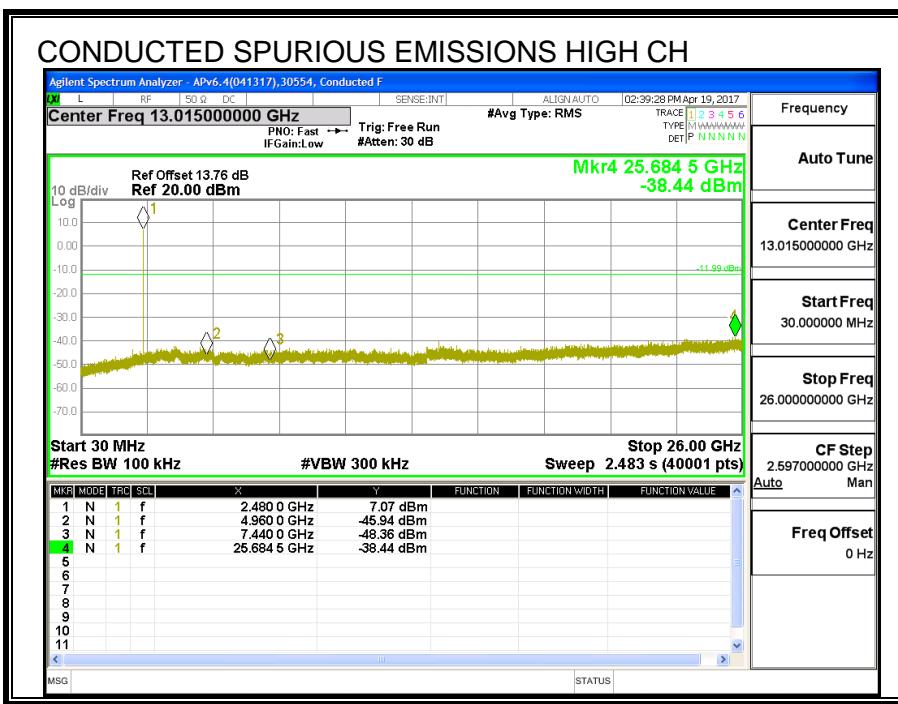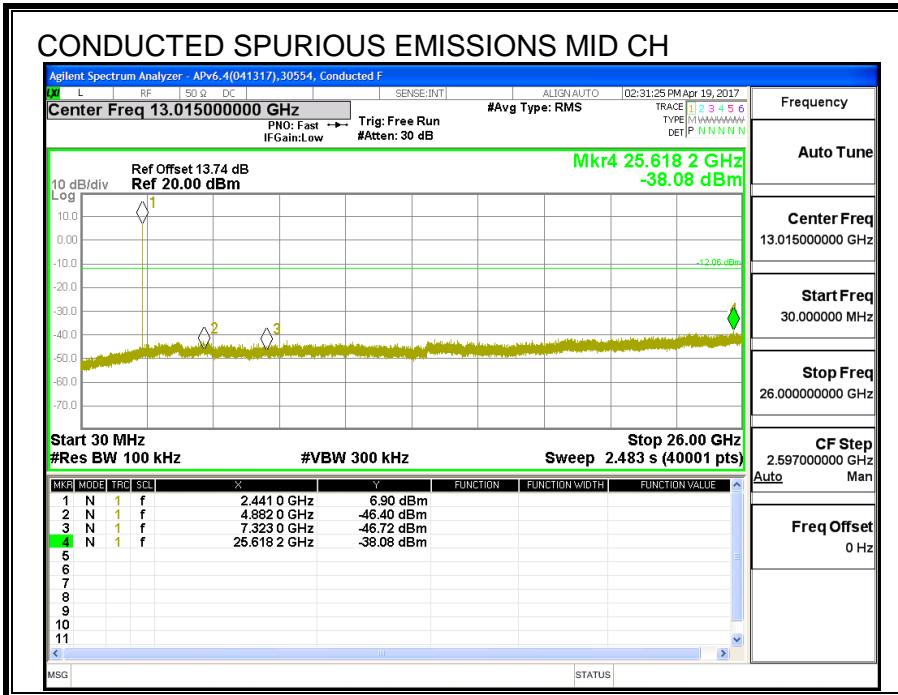

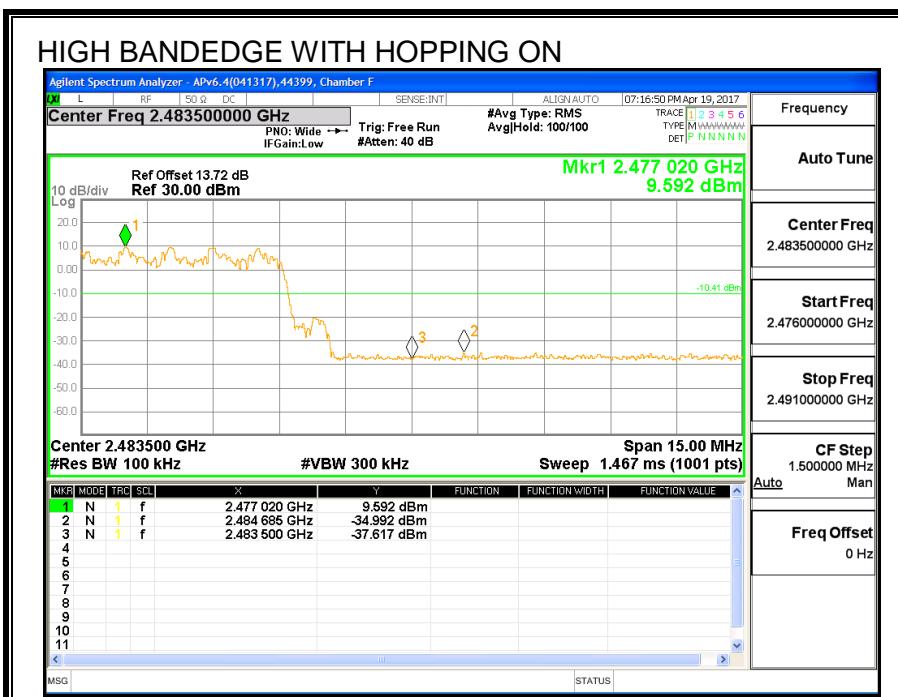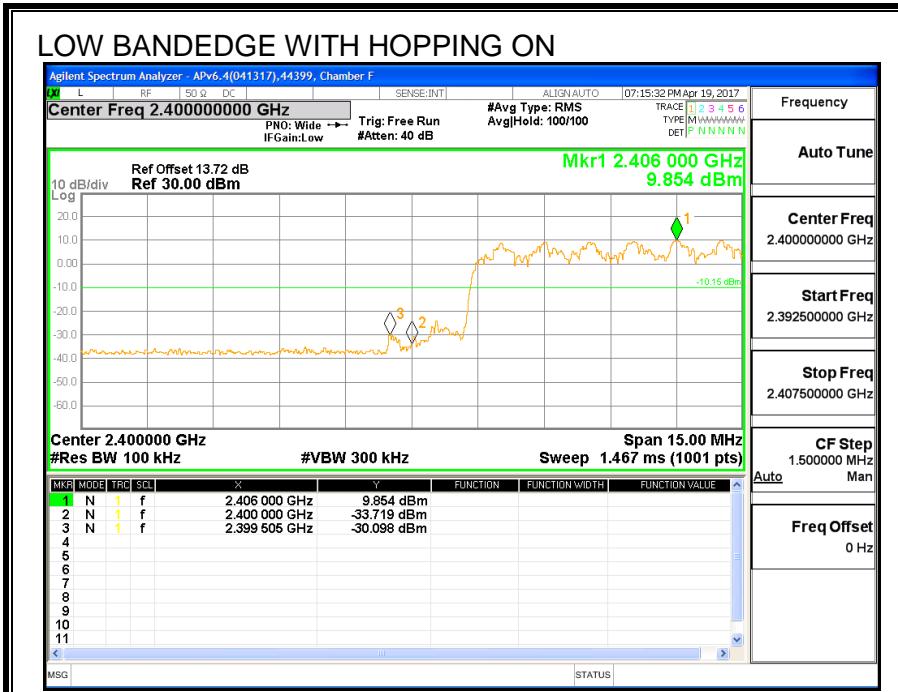

8.8. LAT 3, Pmax BASIC DATA RATE GFSK MODULATION

8.8.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
Low	2402	854.68	836.6
Middle	2441	858.88	852.8
High	2480	851.08	863.0

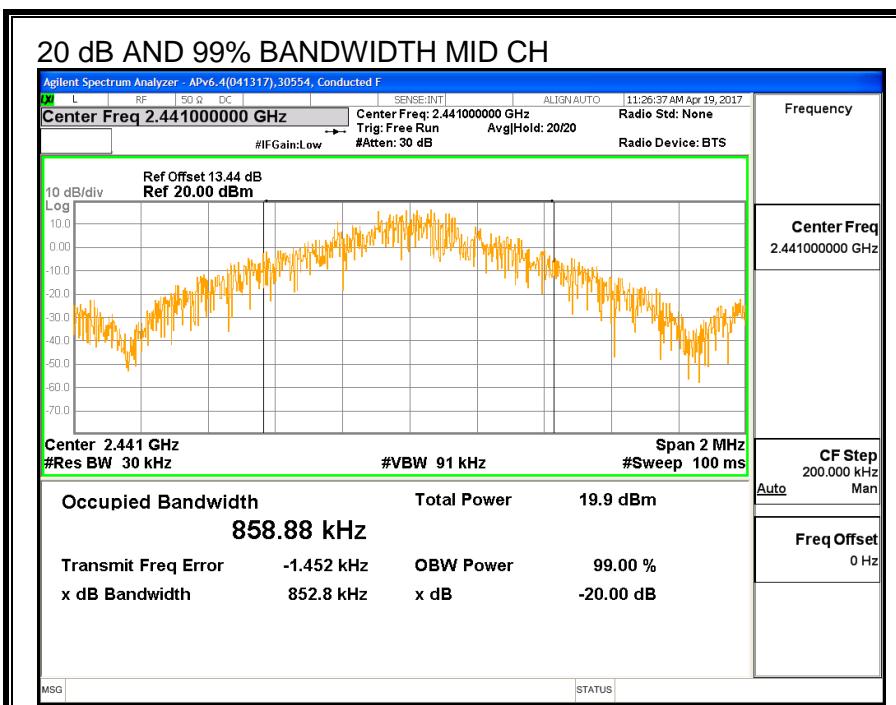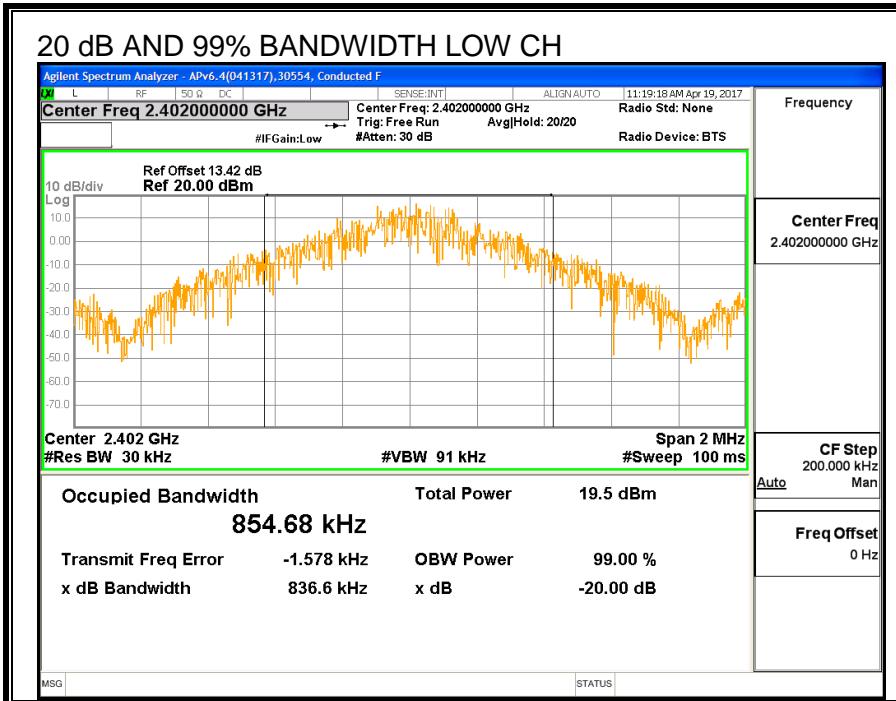

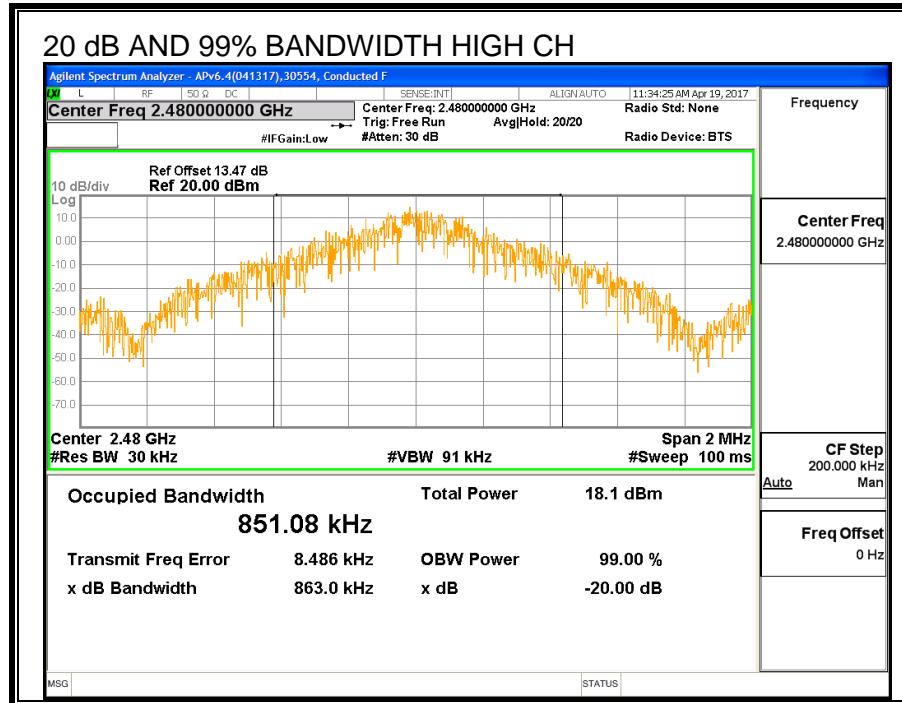

8.8.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (b)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

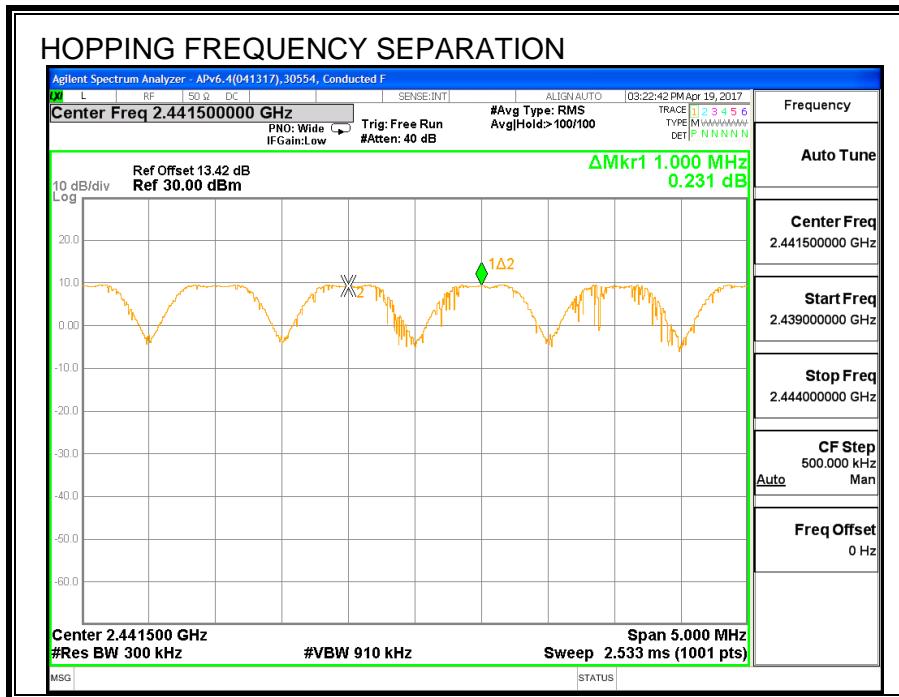

8.8.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

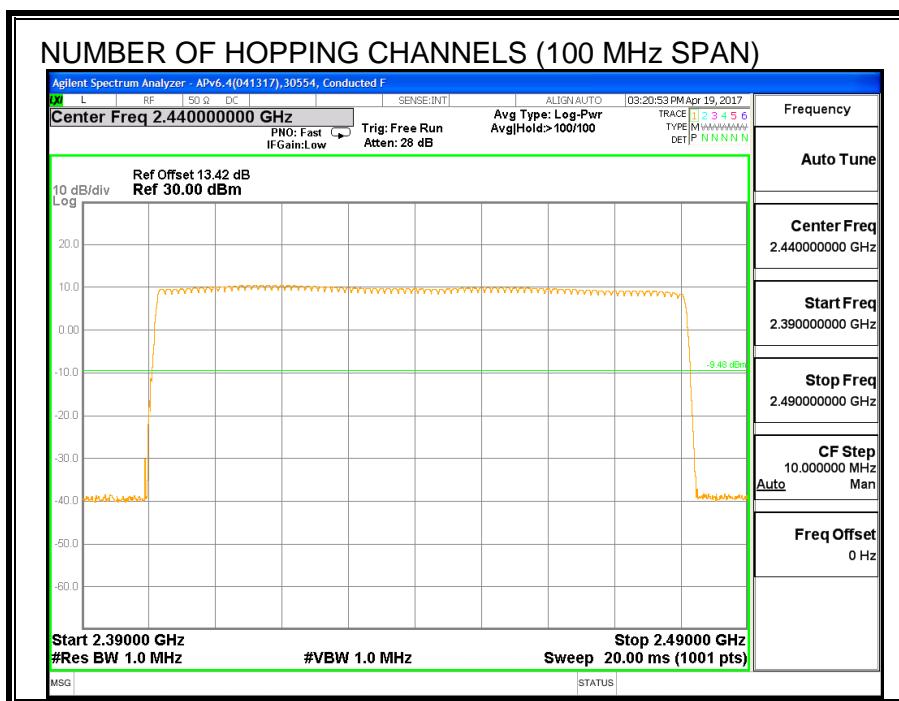


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)

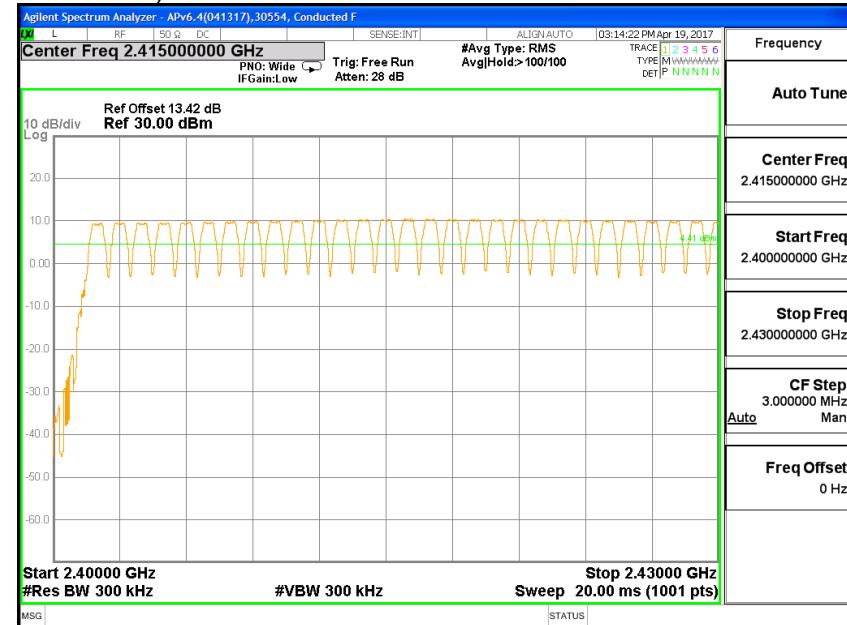

NUMBER OF HOPPING CHANNELS (30 MHz SPAN, SECOND SEGMENT)

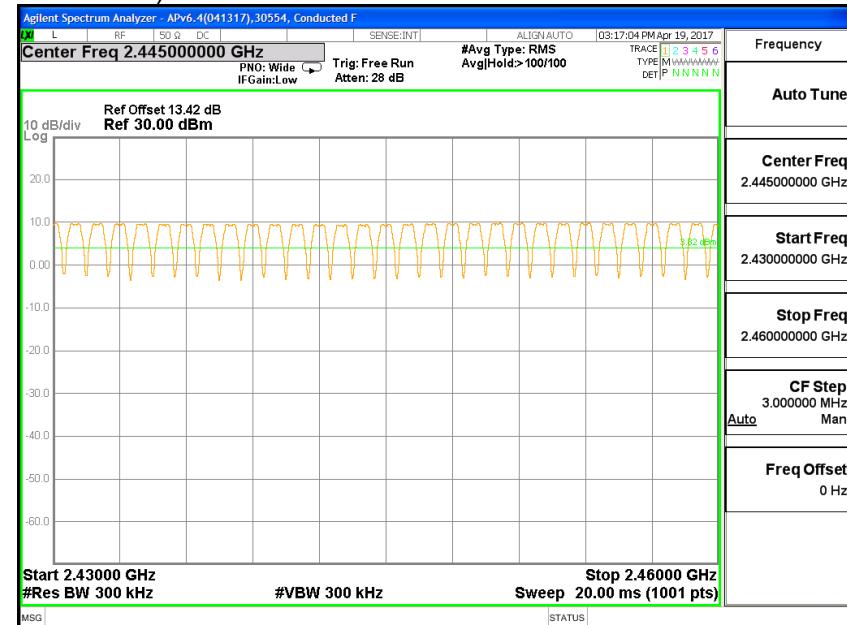

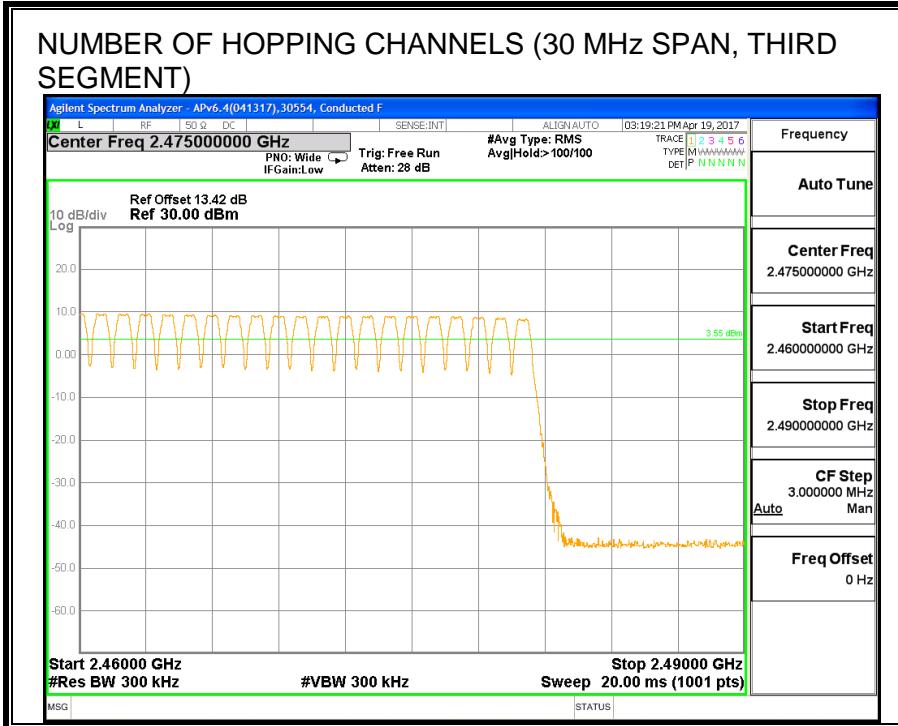

8.8.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.3829	30	0.115	0.4	-0.285
DH3	1.639	15	0.246	0.4	-0.154
DH5	2.888	11	0.318	0.4	-0.082
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.3829	7.5	0.029	0.4	-0.371
DH3	1.639	3.75	0.061	0.4	-0.339
DH5	2.888	2.75	0.079	0.4	-0.321


PULSE WIDTH - DH1

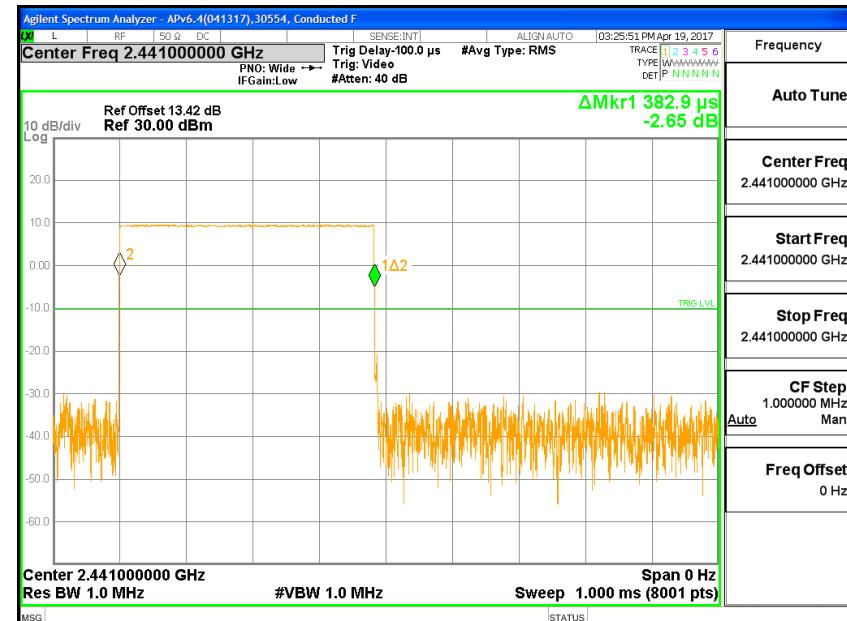


NUMBER OF PULSES - DH1




PULSE WIDTH - DH3

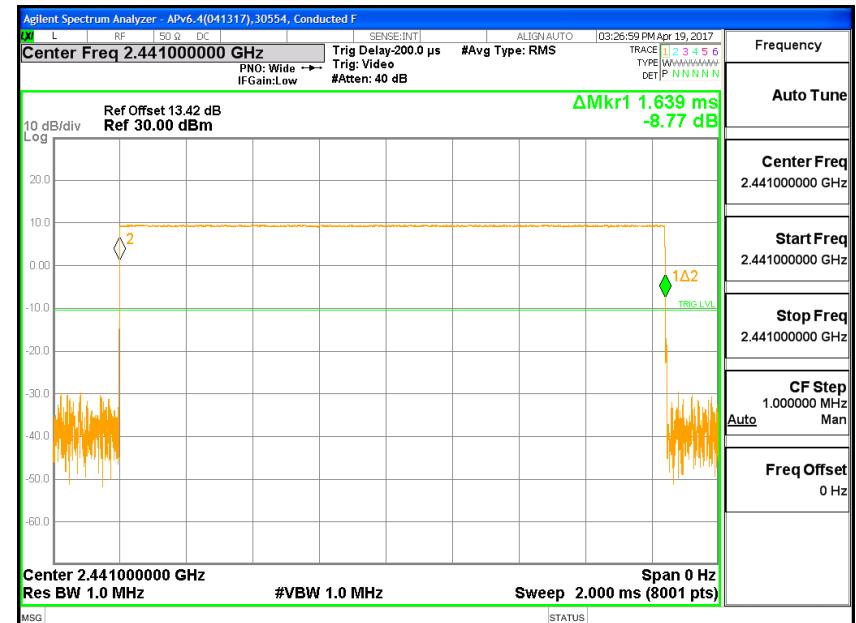


NUMBER OF PULSES - DH3

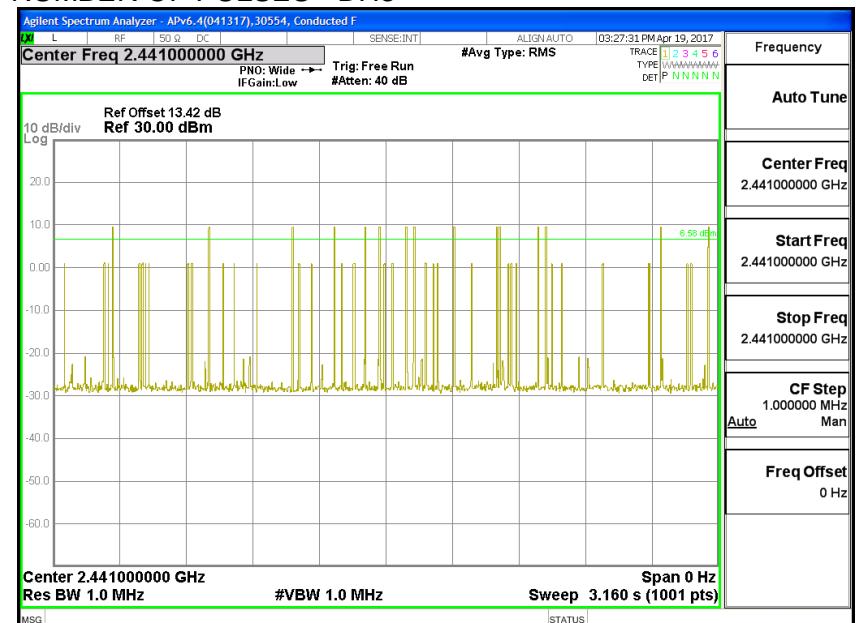

PULSE WIDTH - DH5

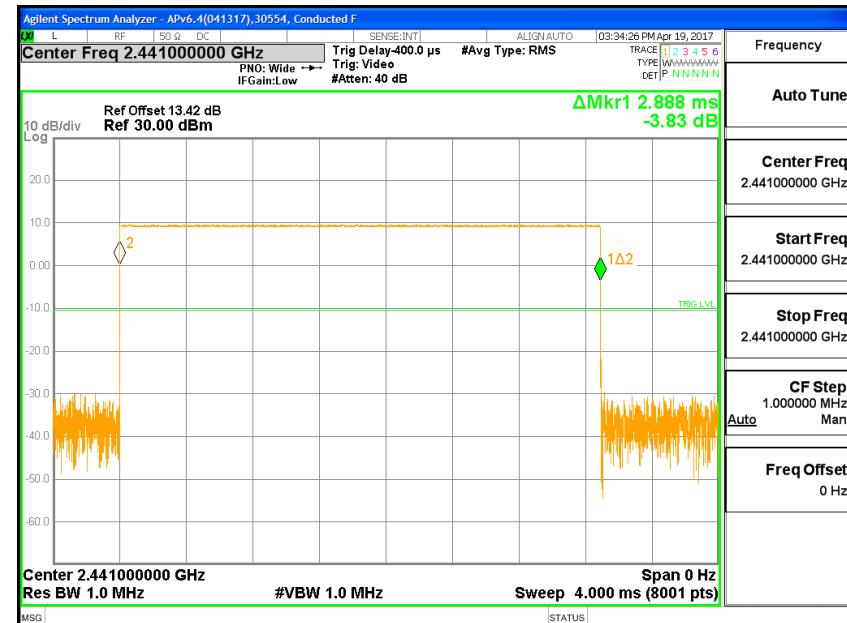

NUMBER OF PULSES - DH5

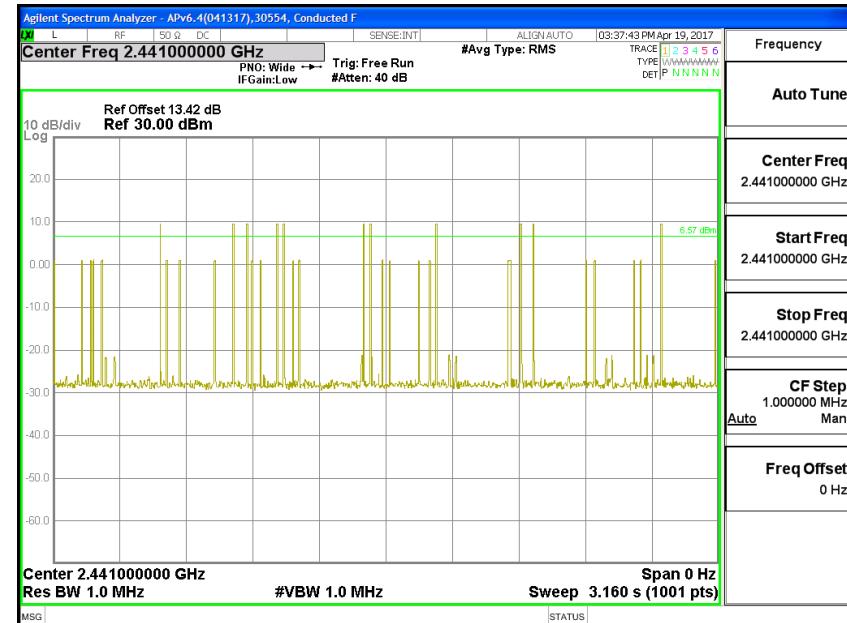

8.8.5. OUTPUT POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.10	30	-9.90
Middle	2441	20.07	30	-9.93
High	2480	20.06	30	-9.94

8.8.6. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE



The transmitter output is connected to a power meter.



RESULTS



The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.



Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.70
Middle	2441	19.86
High	2480	19.65

CONDUCTED BANDEdge AND SPURIOUS EMISSIONS

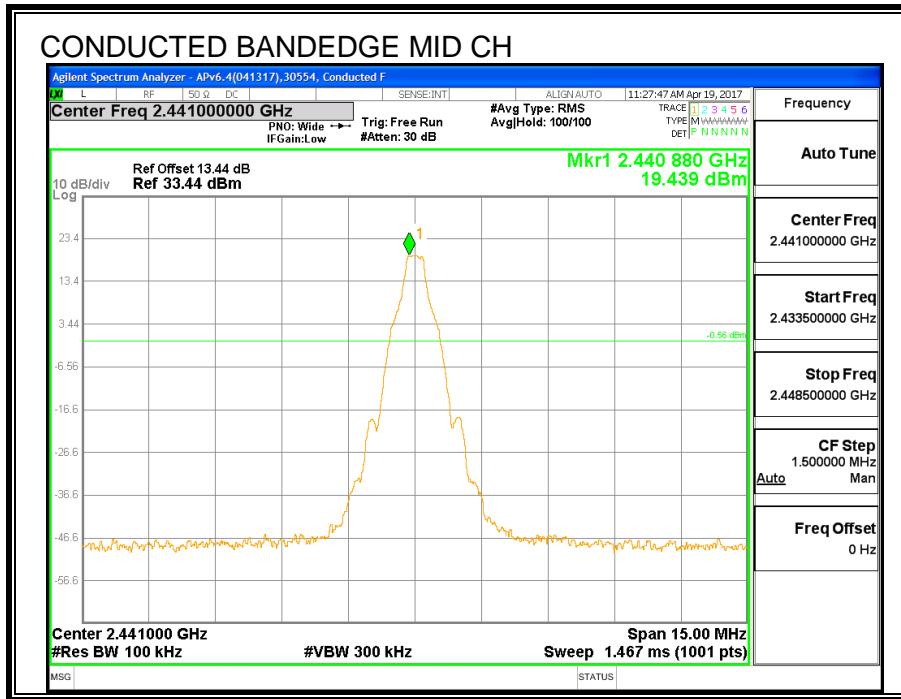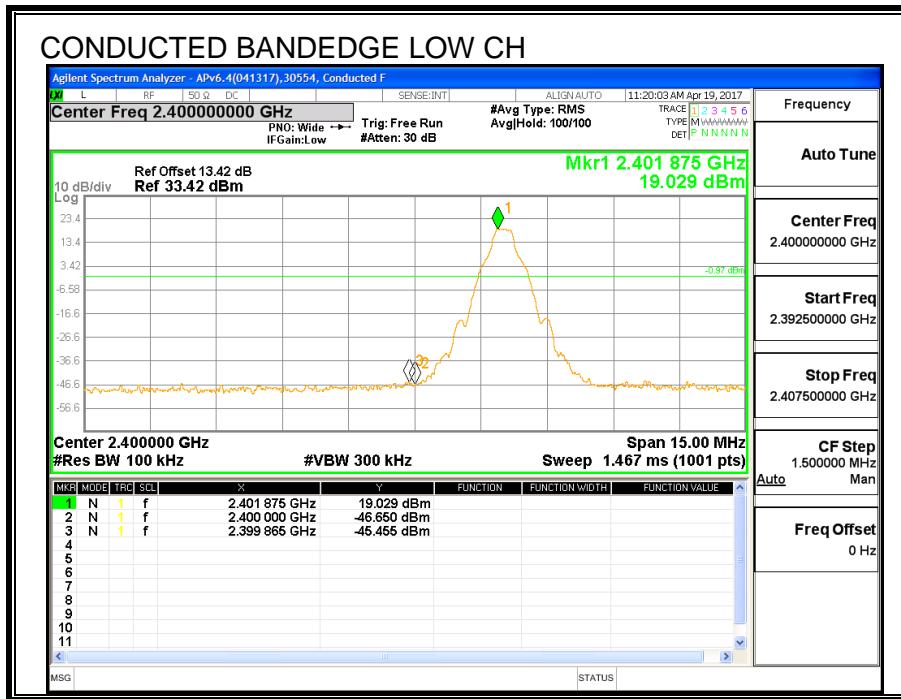

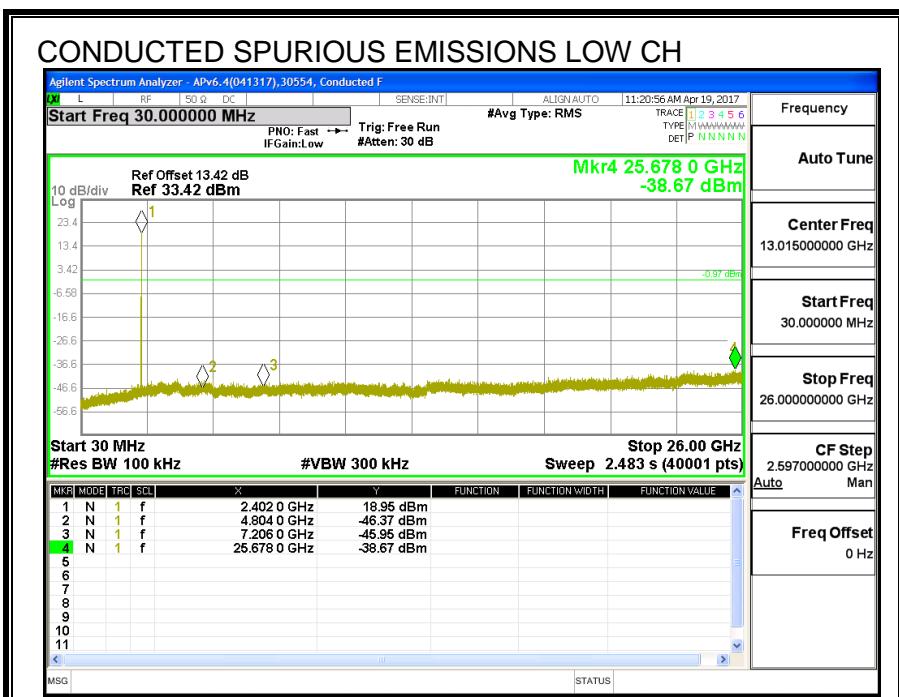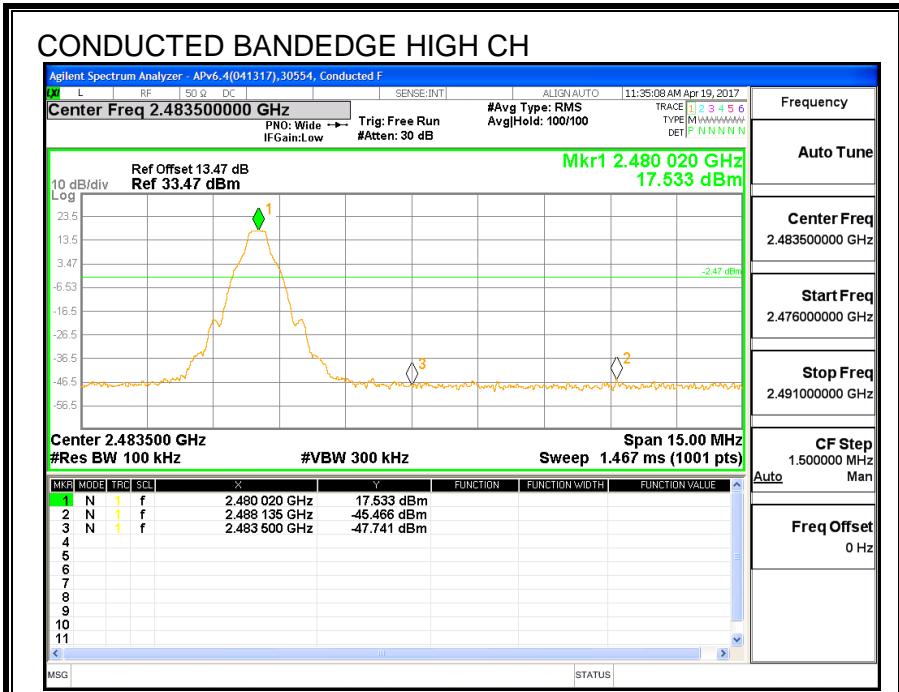

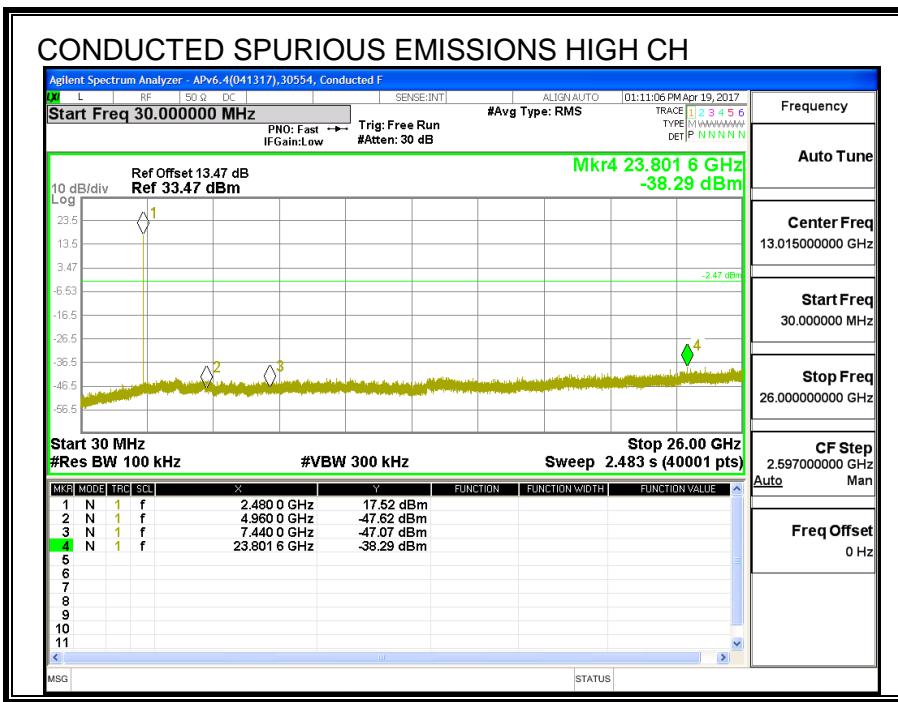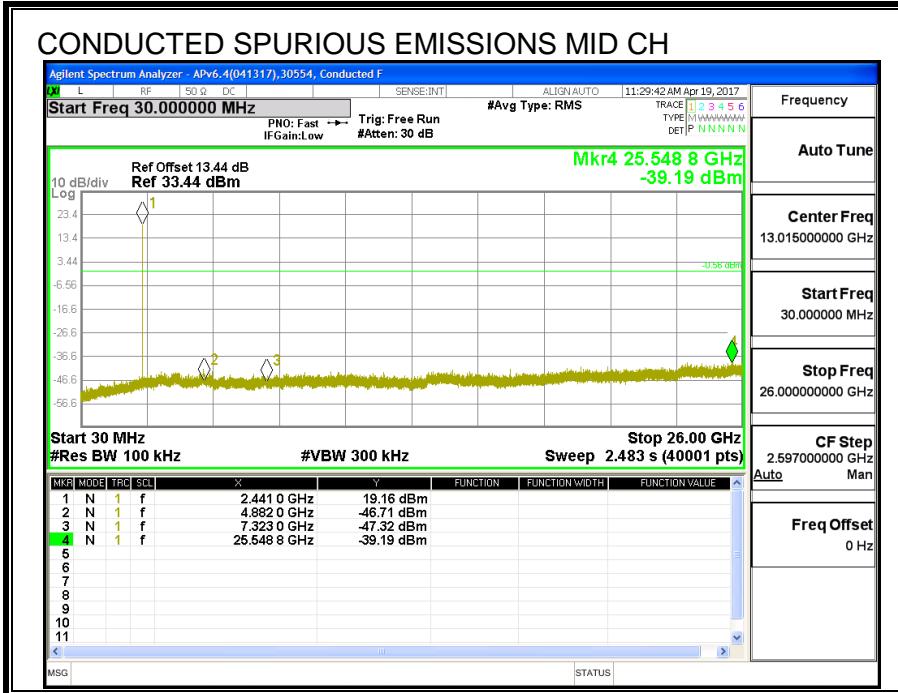

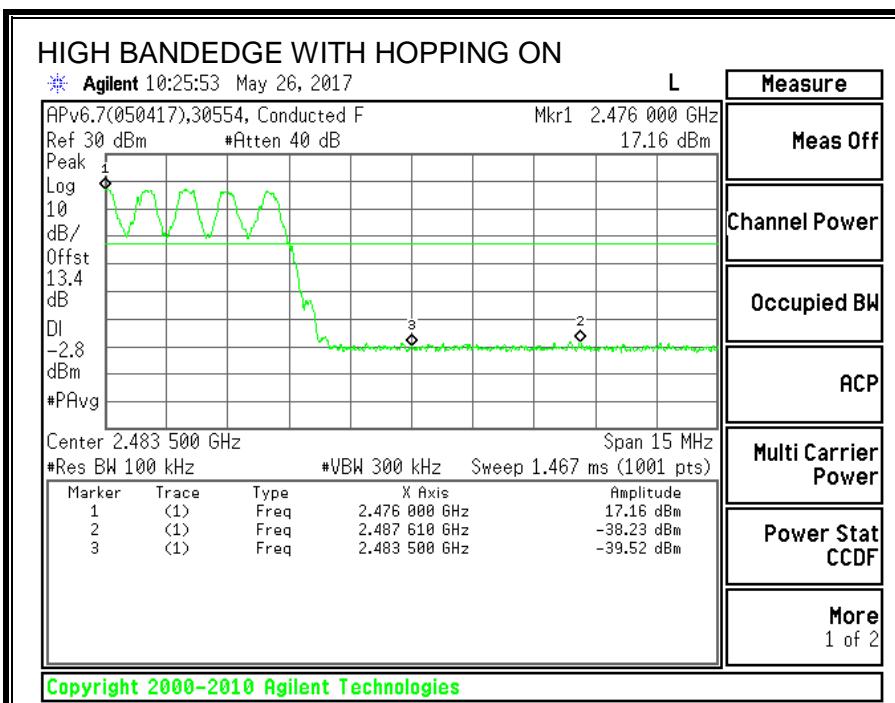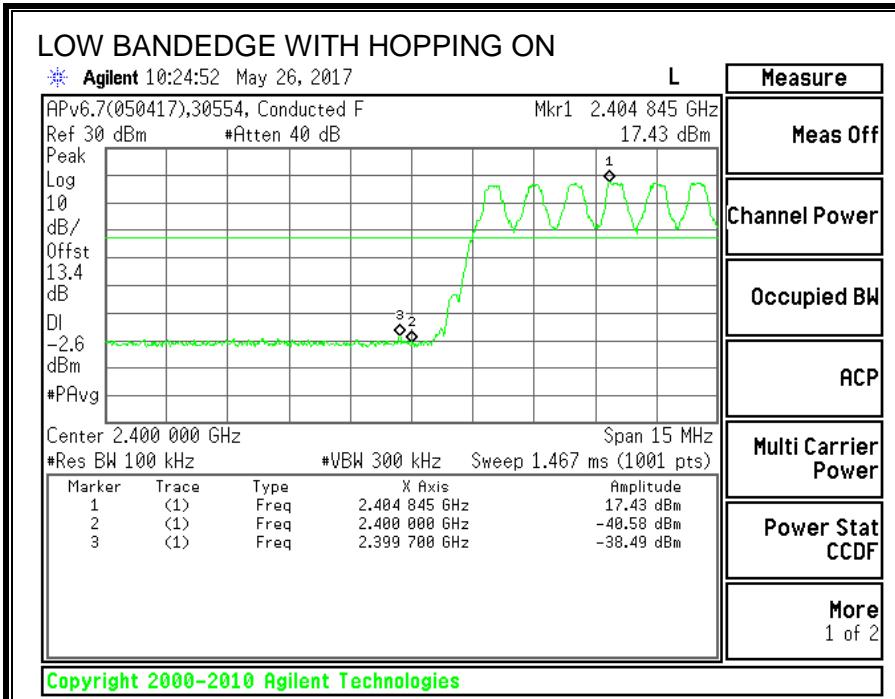

8.9. LAT 3, Pmax ENHANCED DATA RATE DQPSK MODULATION

8.9.1. OUTPUT POWER

ID:	44353	Date:	7/14/2017
-----	-------	-------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.86	21	-1.14
Middle	2441	19.96	21	-1.04
High	2480	19.88	21	-1.12

8.9.2. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	17.44
Middle	2441	17.49
High	2480	17.46

8.10. LAT 3, Pmax ENHANCED DATA RATE 8PSK MODULATION

8.10.1. 20 dB AND 99% BANDWIDTH9

LIMITS



None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)	20dB Bandwidth (MHz)
Low	2402	2.4654	2.796
Middle	2441	1.7532	1.4091
High	2480	2.8866	2.946

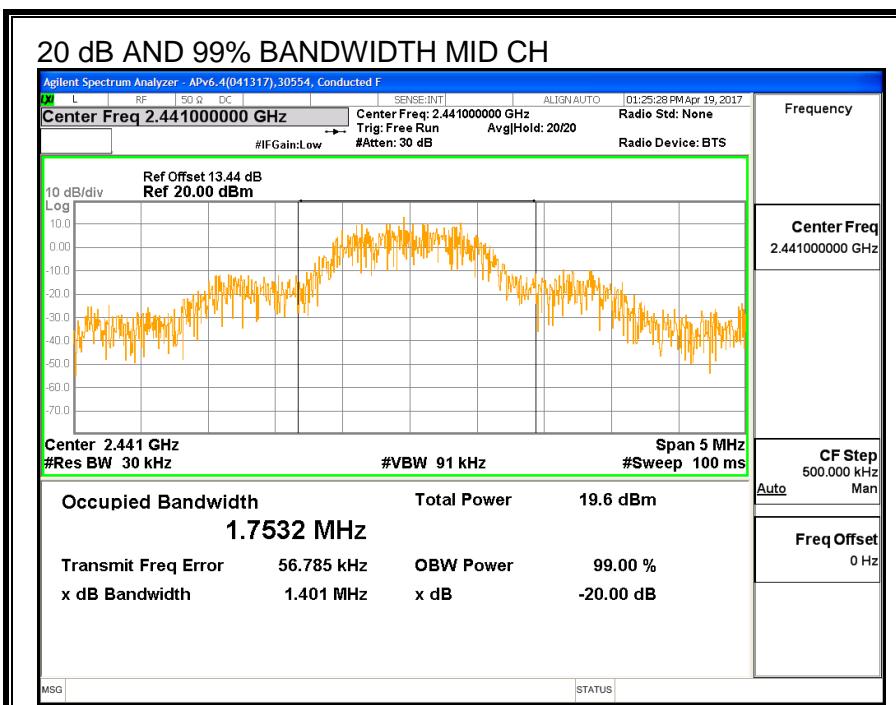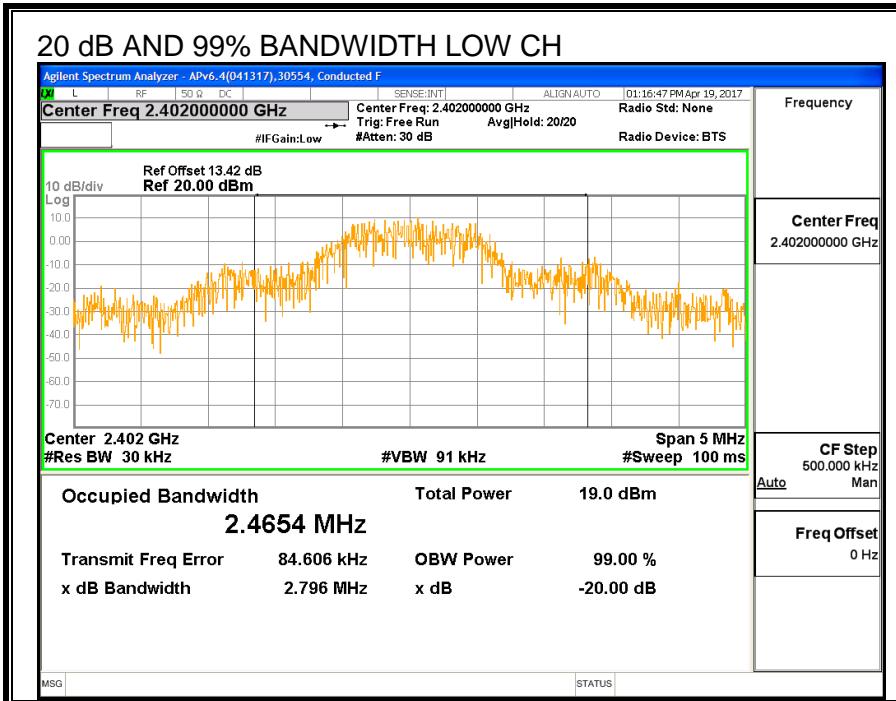

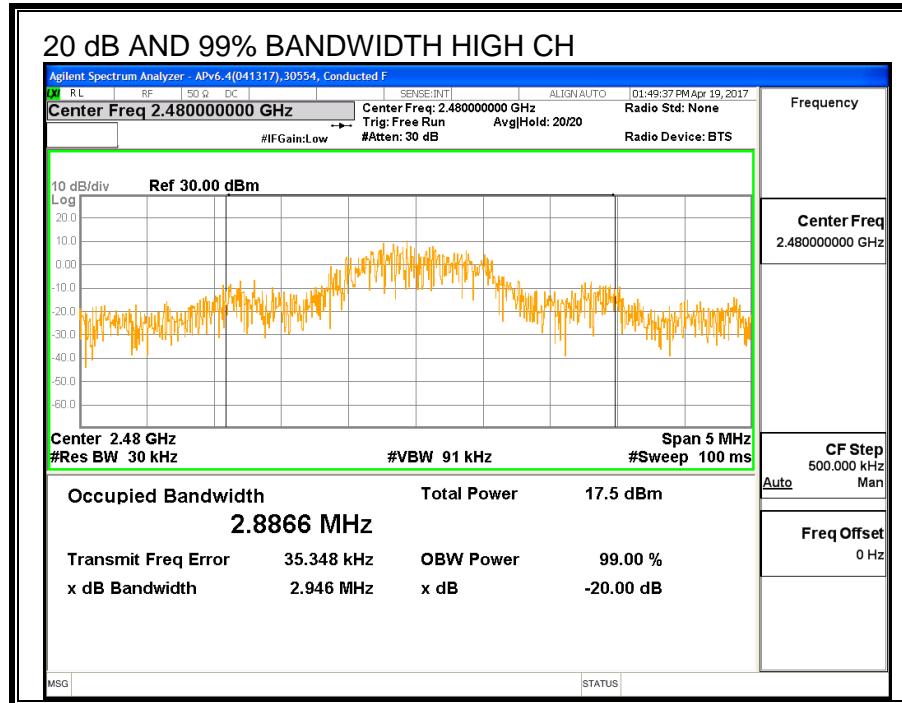

8.10.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (b)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

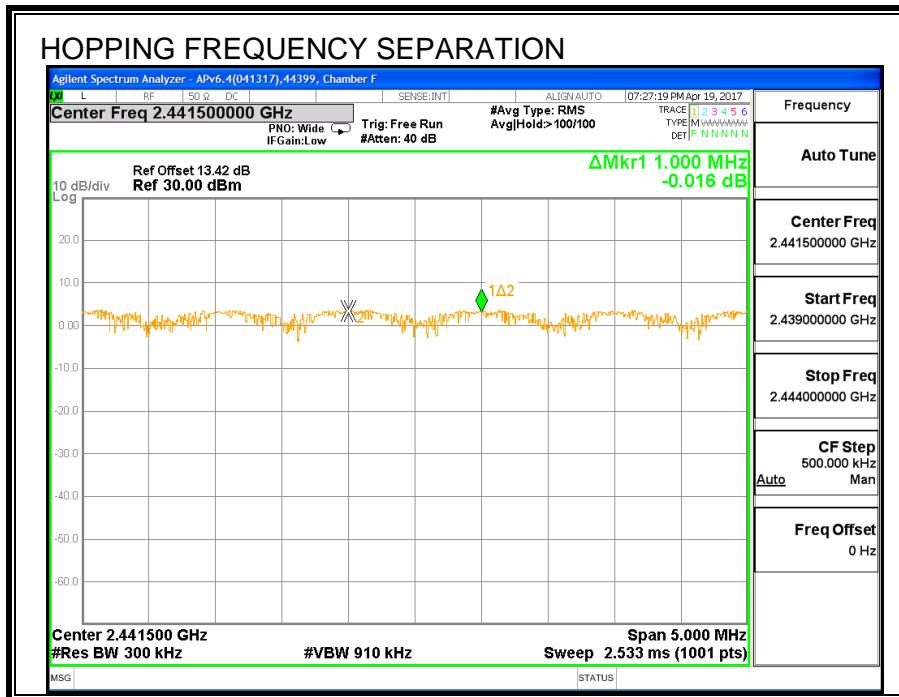

8.10.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

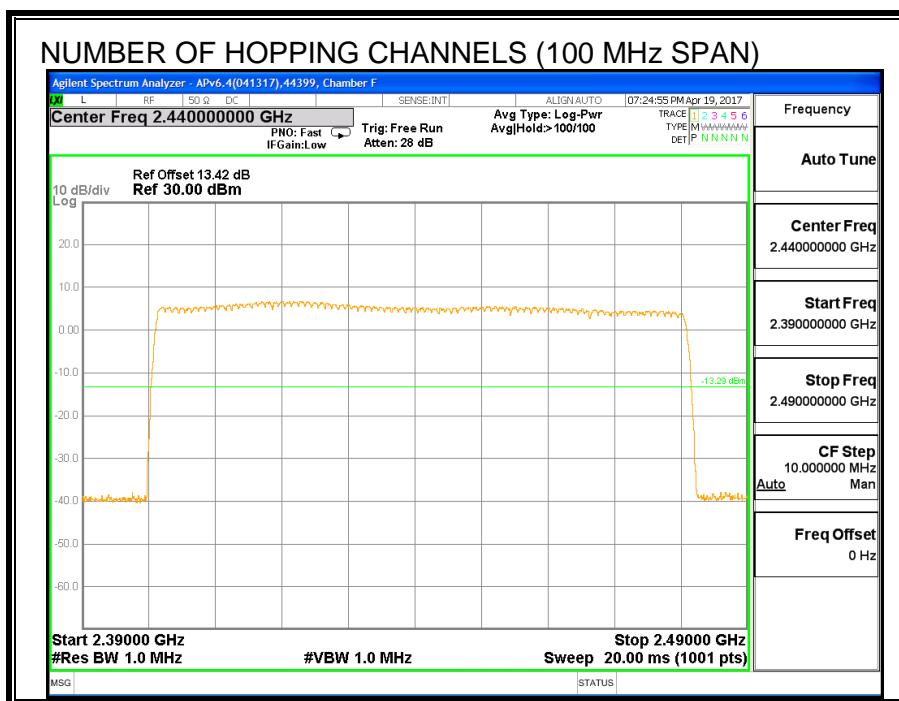


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)

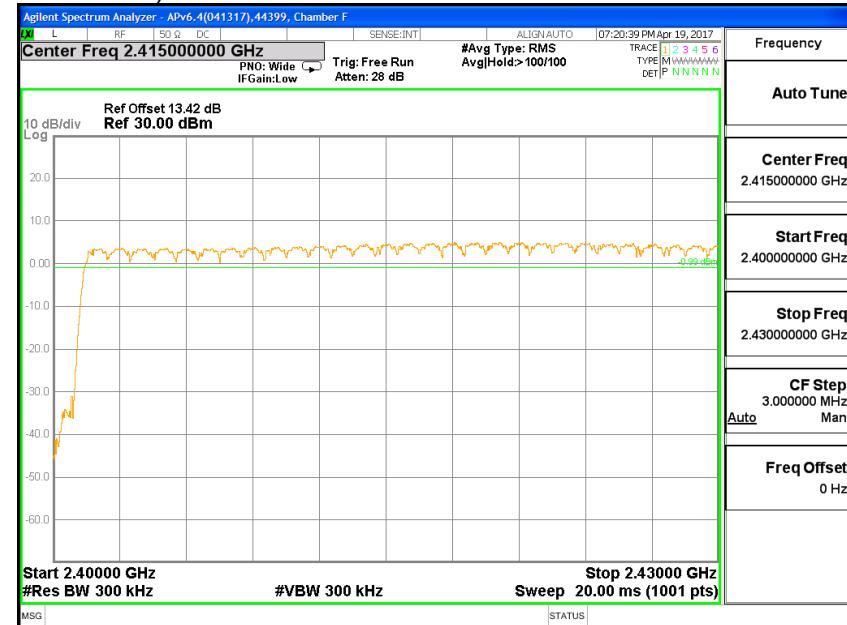

NUMBER OF HOPPING CHANNELS (30 MHz SPAN, SECOND SEGMENT)

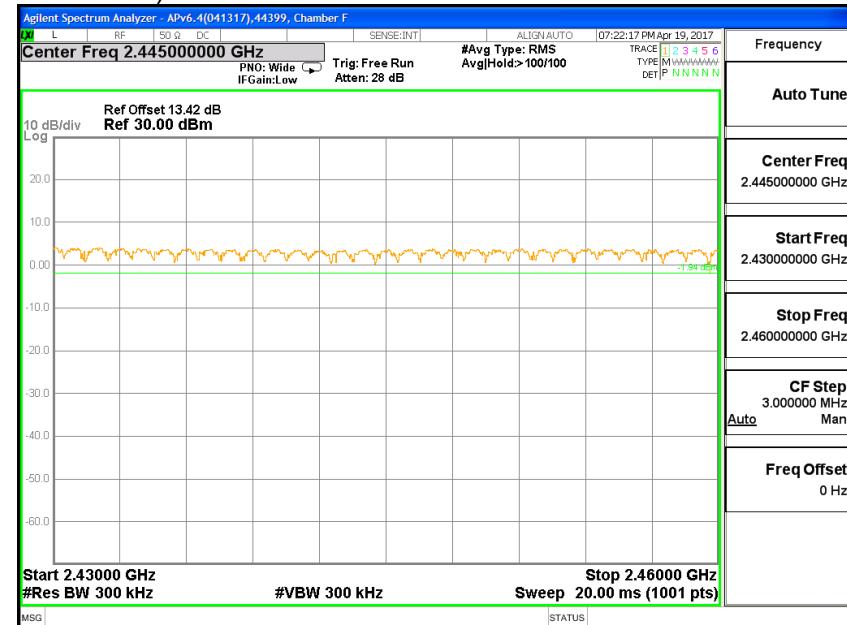

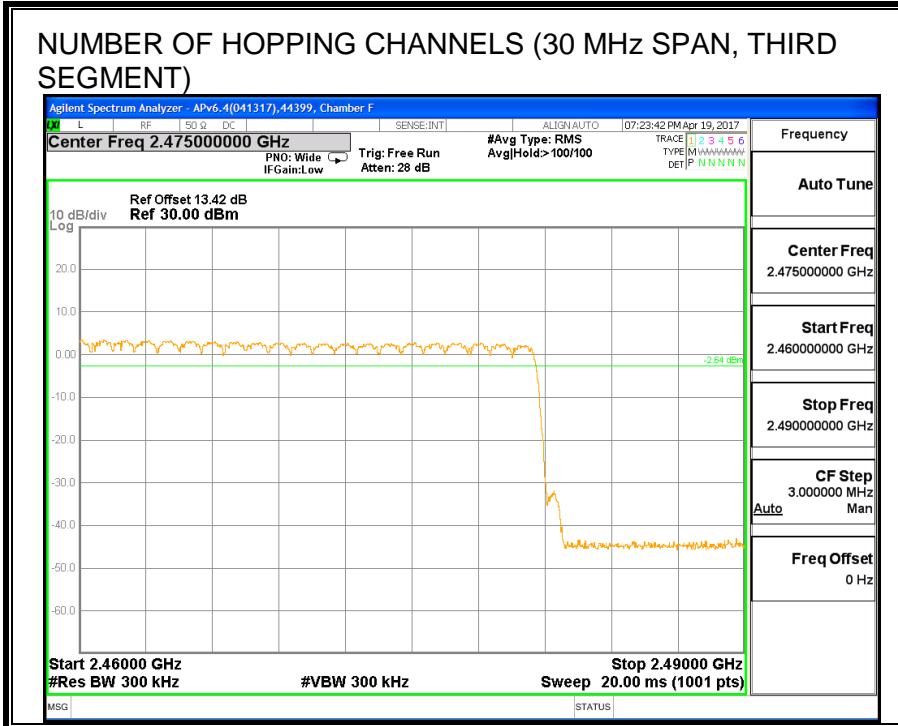

8.10.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK (EDR) Mode					
3DH1	0.3888	32	0.124	0.4	-0.276
3DH3	1.641	17	0.279	0.4	-0.121
3DH5	2.892	13	0.376	0.4	-0.024


PULSE WIDTH - 3DH1

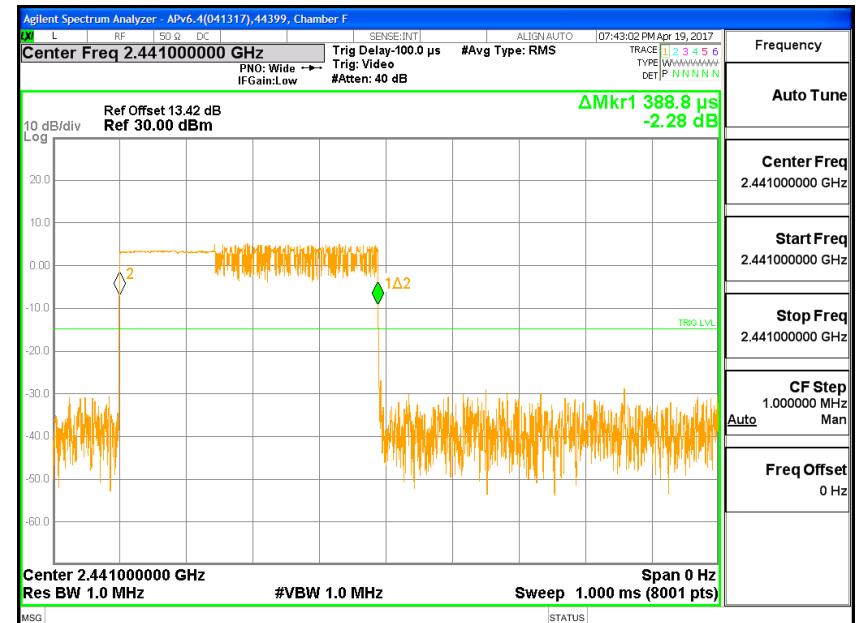


NUMBER OF PULSES - 3DH1

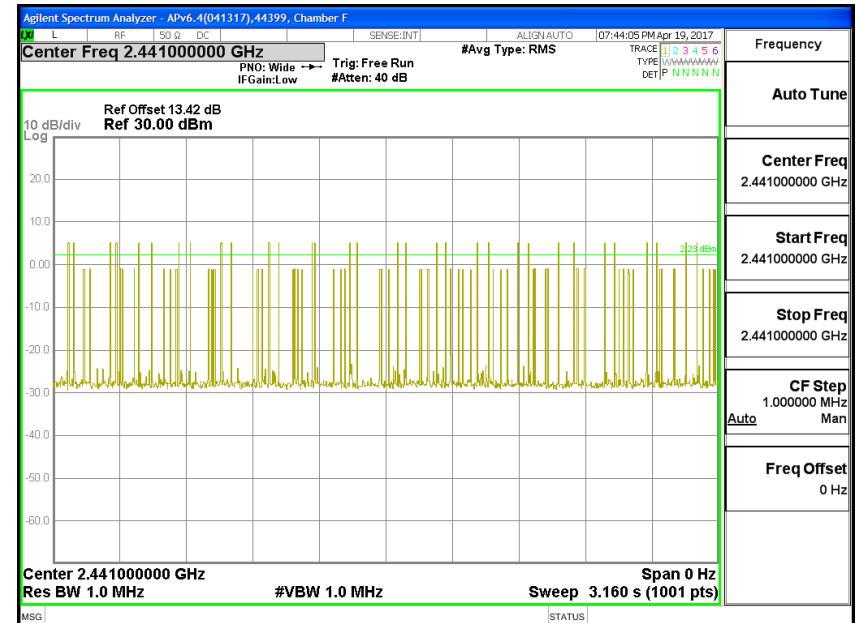


PULSE WIDTH - 3DH3

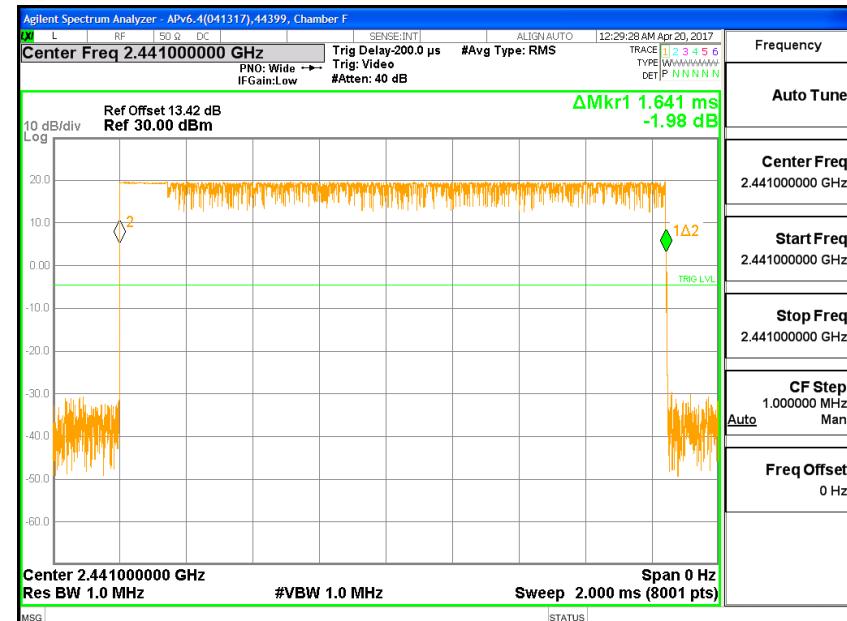


NUMBER OF PULSES - 3DH3

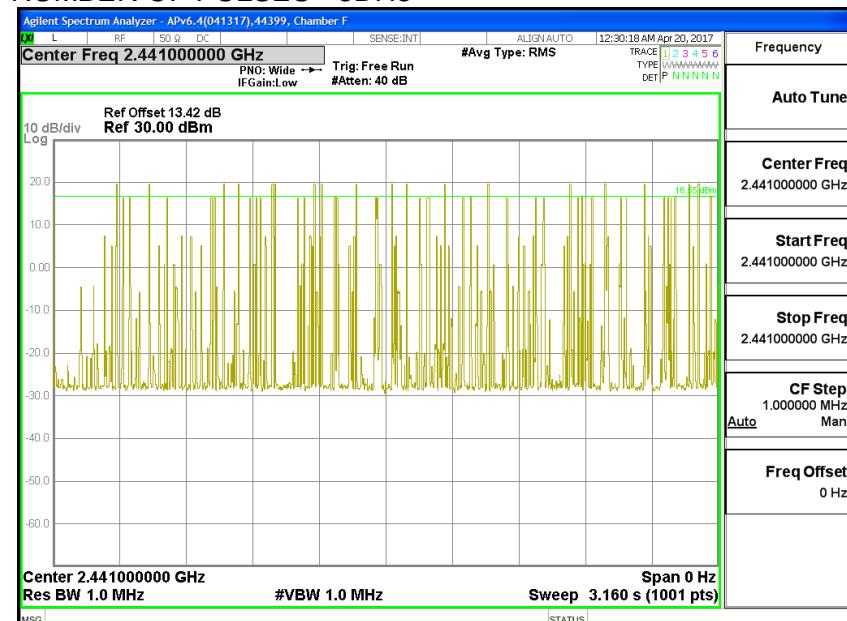

PULSE WIDTH - 3DH5

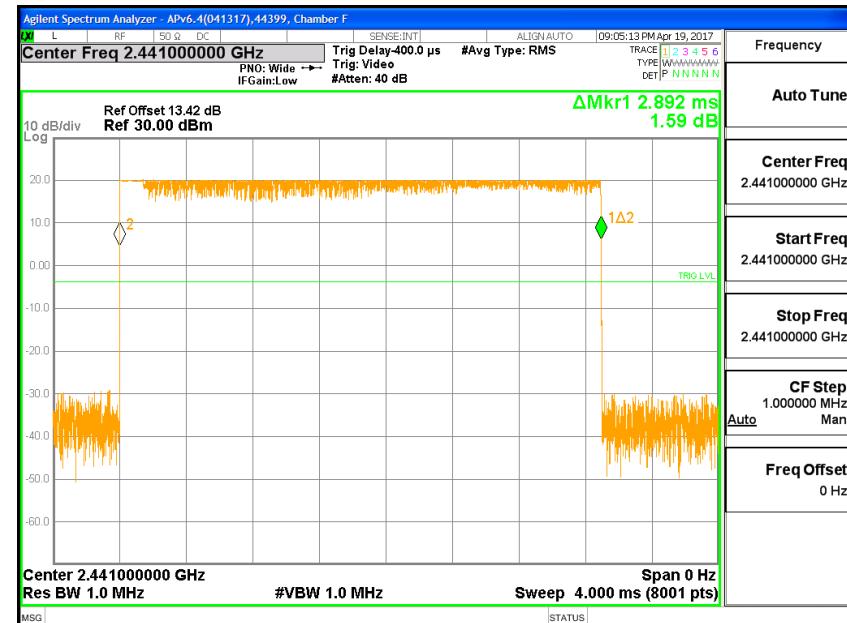

NUMBER OF PULSES - 3DH5

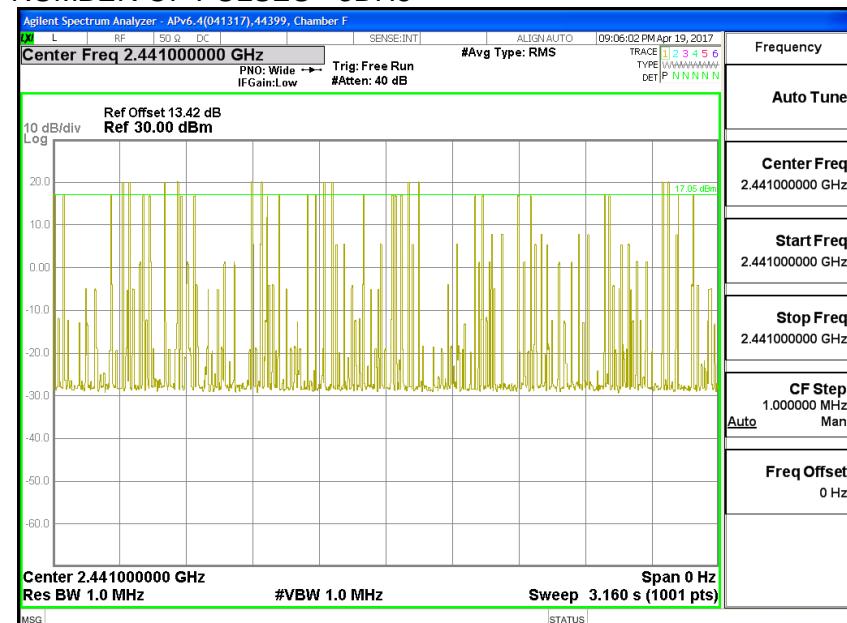

8.10.5. OUTPUT POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.11	21	-0.86
Middle	2441	20.15	21	-0.82
High	2480	20.09	21	-0.88

8.10.6. AVERAGE POWER

ID:	44353	Date:	7/14/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	17.33
Middle	2441	17.45
High	2480	17.40

8.10.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS