

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

<b>Frequency of Emission (MHz)</b>	<b>Conducted Limit (dB<math>\mu</math>V)</b>	
	<b>Quasi-peak</b>	<b>Average</b>
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

## 10.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE


### LINE 1 RESULTS

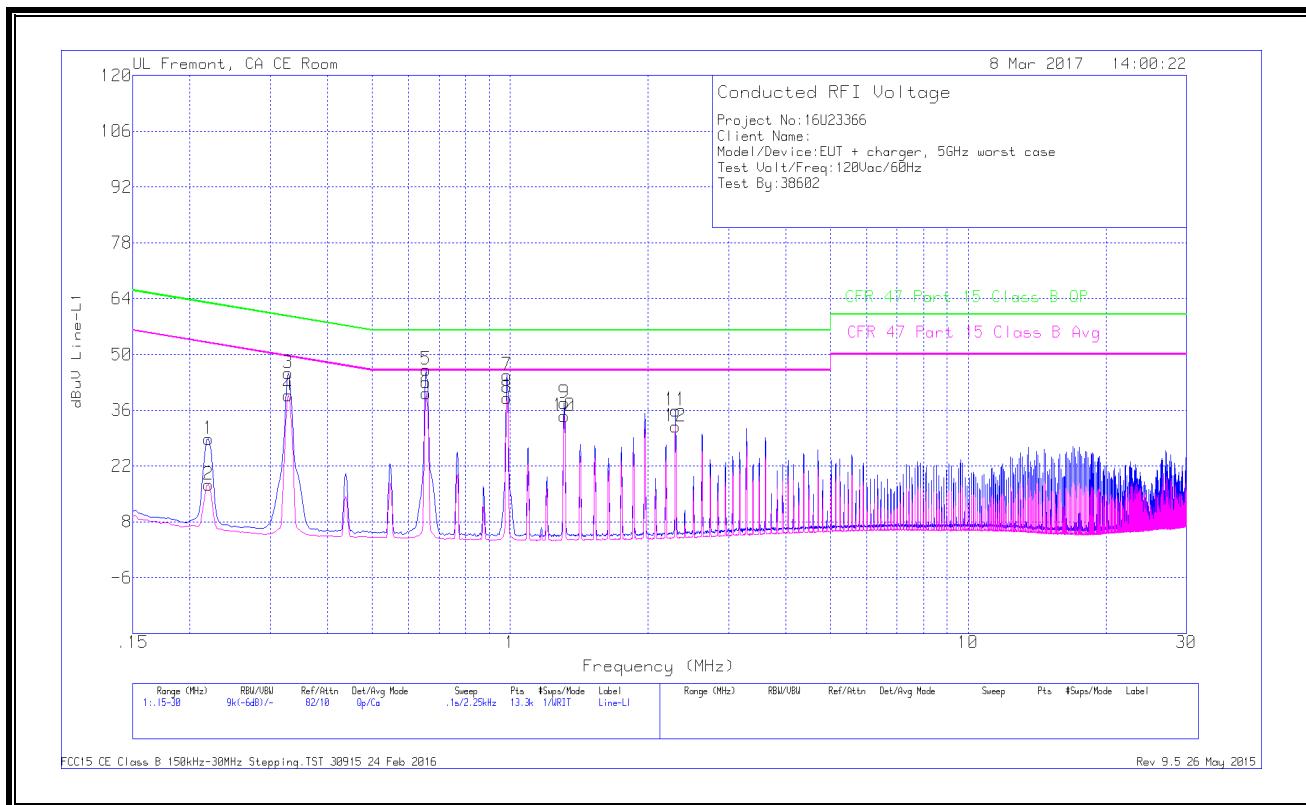

### WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.21975	18.66	Qp	0	.1	10.1	28.86	62.83	-33.97	-	-
2	.21975	7.15	Ca	0	.1	10.1	17.35	-	-	52.83	-35.48
3	.32775	35.16	Qp	0	.1	10.1	45.36	59.51	-14.15	-	-
4	.32775	29.62	Ca	0	.1	10.1	39.82	-	-	49.51	-9.69
5	.65625	35.95	Qp	0	.1	10.1	46.15	56	-9.85	-	-
6	.65625	30.06	Ca	0	.1	10.1	40.26	-	-	46	-5.74
7	.98475	34.65	Qp	0	.1	10.1	44.85	56	-11.15	-	-
8	.98475	28.9	Ca	0	.1	10.1	39.1	-	-	46	-6.9
9	1.31325	27.56	Qp	0	.1	10.1	37.76	56	-18.24	-	-
10	1.31325	24.35	Ca	0	.1	10.1	34.55	-	-	46	-11.45
11	2.2965	25.8	Qp	0	.1	10.1	36	56	-20	-	-
12	2.29875	21.7	Ca	0	.1	10.1	31.9	-	-	46	-14.1

## LINE 2 RESULTS

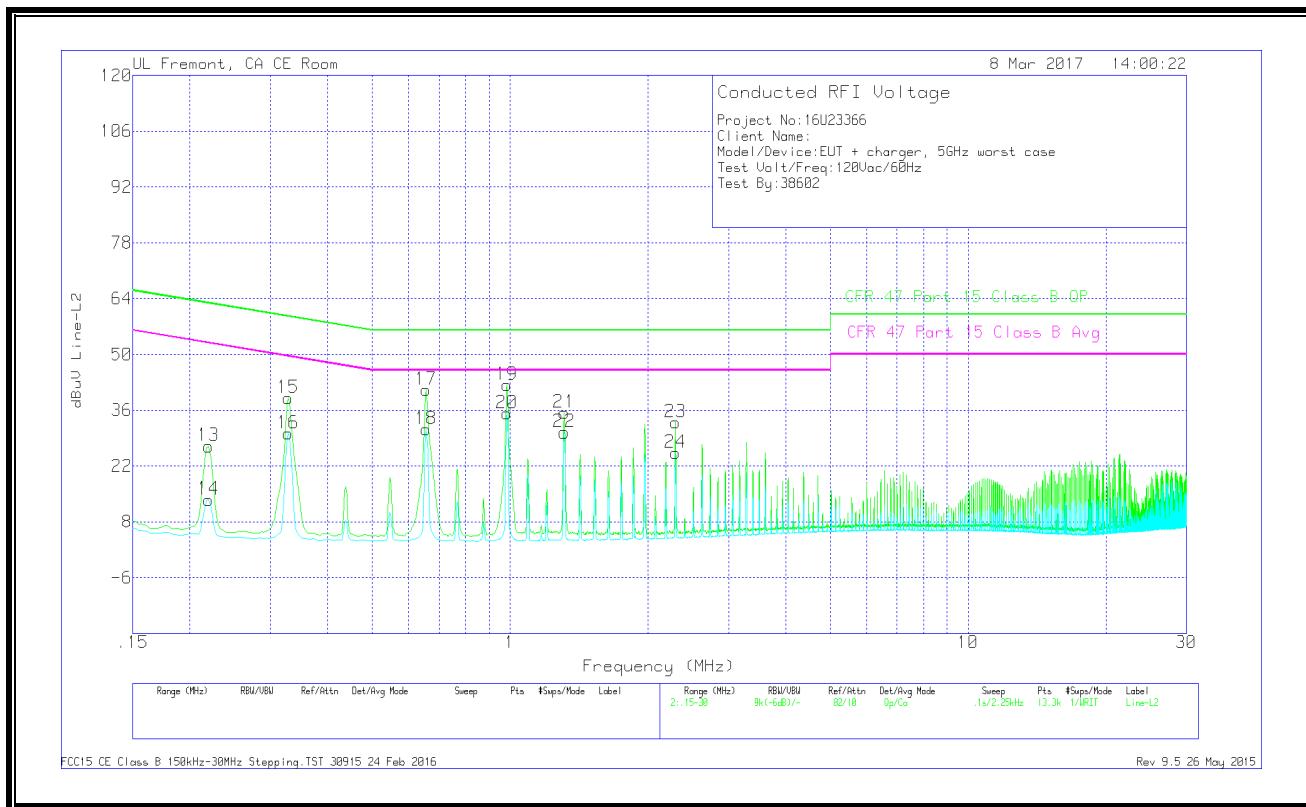


## WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.21975	16.77	Qp	0	.1	10.1	26.97	62.83	-35.86	-	-
14	.21975	3.38	Ca	0	.1	10.1	13.58	-	-	52.83	-39.25
15	.32775	28.82	Qp	0	.1	10.1	39.02	59.51	-20.49	-	-
16	.32775	19.92	Ca	0	.1	10.1	30.12	-	-	49.51	-19.39
17	.65625	30.94	Qp	0	.1	10.1	41.14	56	-14.86	-	-
18	.65625	21.03	Ca	0	.1	10.1	31.23	-	-	46	-14.77
19	.98475	32.13	Qp	0	.1	10.1	42.33	56	-13.67	-	-
20	.98475	25	Ca	0	.1	10.1	35.2	-	-	46	-10.8
21	1.31325	25.17	Qp	0	.1	10.1	35.37	56	-20.63	-	-
22	1.31325	20.25	Ca	0	.1	10.1	30.45	-	-	46	-15.55
23	2.2965	22.79	Qp	0	.1	10.1	32.99	56	-23.01	-	-
24	2.2965	15.11	Ca	0	.1	10.1	25.31	-	-	46	-20.69

## 10.2. EUT POWERED BY HOST PC VIA USB CABLE


### LINE 1 RESULTS

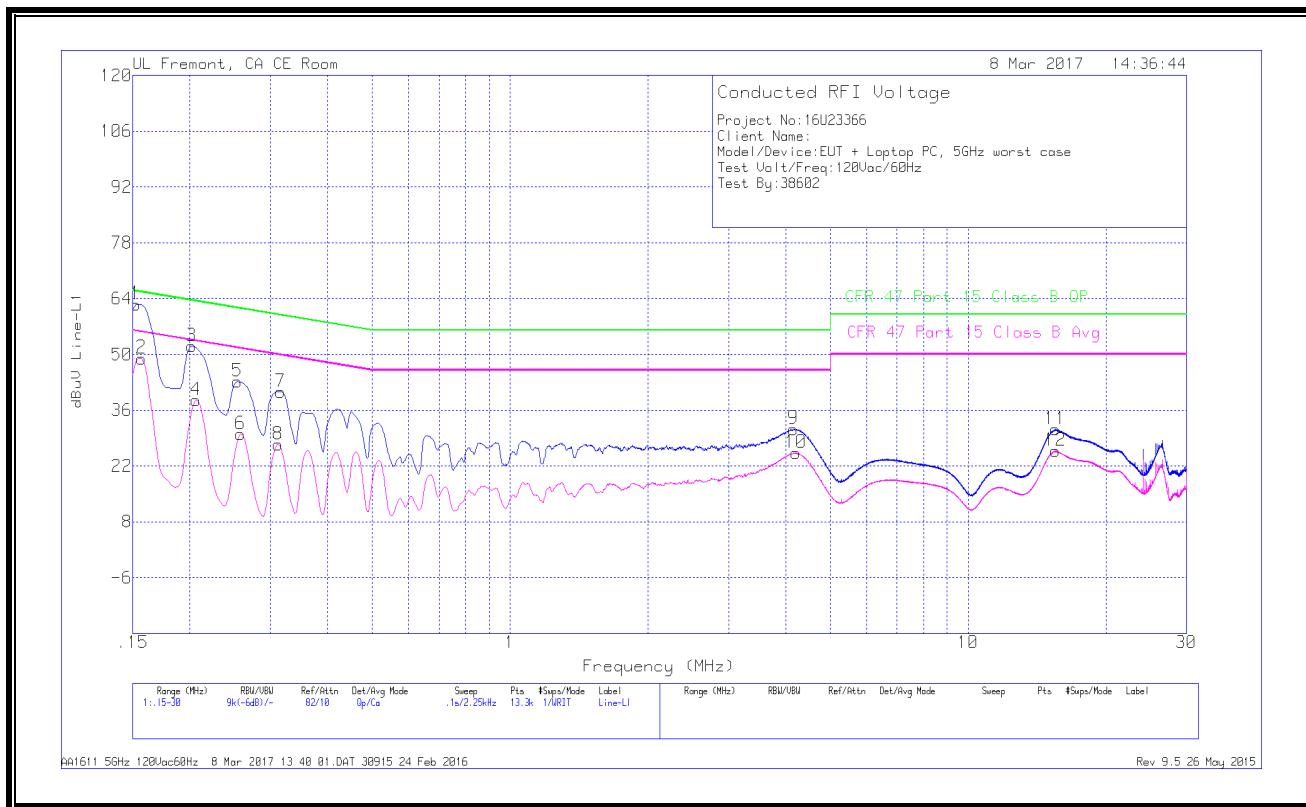

### WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.15225	52.3	Qp	.1	.1	10.1	62.6	65.88	-3.28	-	-
2	.15675	38.84	Ca	0	.1	10.1	49.04	-	-	55.63	-6.59
3	.20175	41.94	Qp	0	.1	10.1	52.14	63.54	-11.4	-	-
4	.20625	28.29	Ca	0	.1	10.1	38.49	-	-	53.35	-14.86
5	.2535	32.94	Qp	0	.1	10.1	43.14	61.64	-18.5	-	-
6	.258	19.75	Ca	0	.1	10.1	29.95	-	-	51.5	-21.55
7	.31537	30.46	Qp	0	.1	10.1	40.66	59.83	-19.17	-	-
8	.312	17.23	Ca	0	.1	10.1	27.43	-	-	49.92	-22.49
9	4.15725	21.11	Qp	0	.1	10.1	31.31	56	-24.69	-	-
10	4.2135	15.09	Ca	0	.1	10.1	25.29	-	-	46	-20.71
11	15.5333	20.76	Qp	0	.2	10.2	31.16	60	-28.84	-	-
12	15.5378	15.43	Ca	0	.2	10.2	25.83	-	-	50	-24.17

## LINE 2 RESULTS

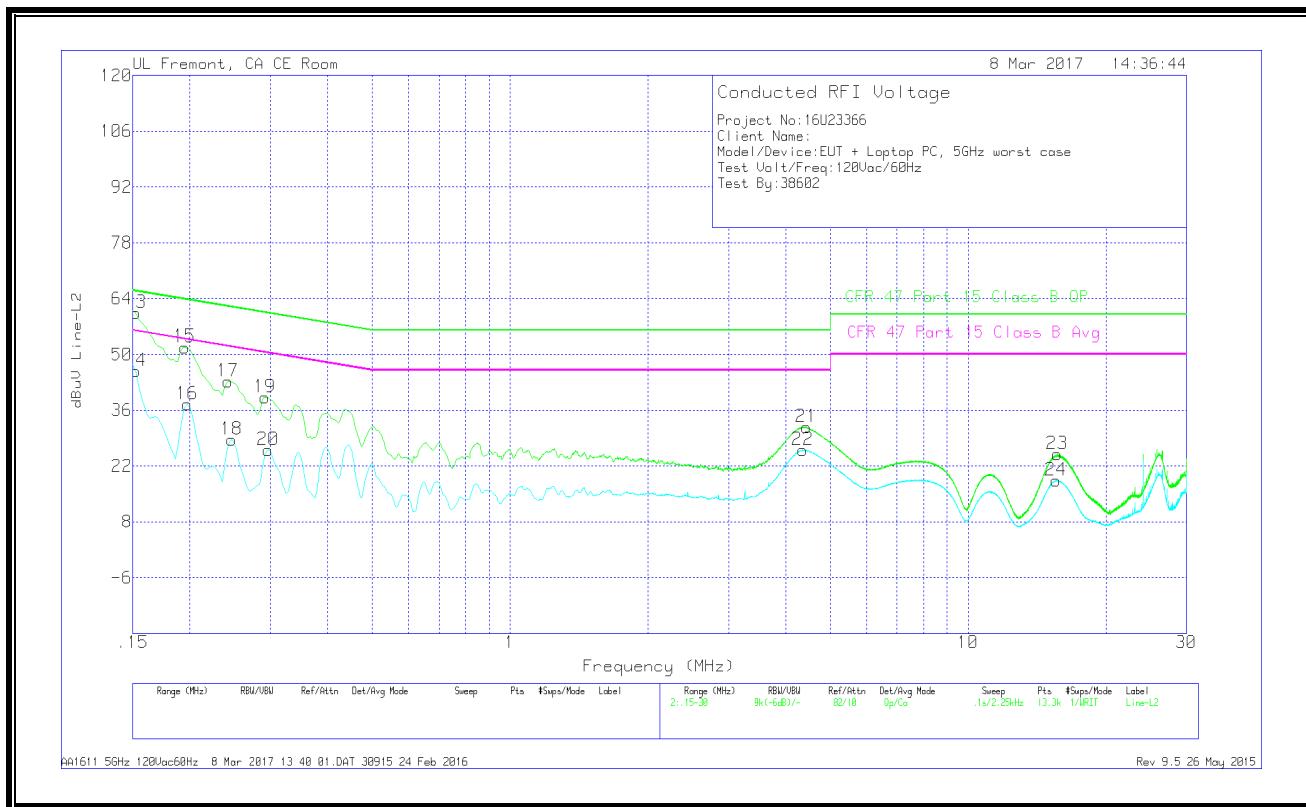

## WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.15225	50.25	Qp	0	0	10.1	60.35	65.88	-5.53	-	-
14	.15225	35.65	Ca	0	0	10.1	45.75	-	-	55.88	-10.13
15	.195	41.62	Qp	0	.1	10.1	51.82	63.82	-12	-	-
16	.19725	27.27	Ca	0	.1	10.1	37.47	-	-	53.73	-16.26
17	.24225	33.05	Qp	0	.1	10.1	43.25	62.02	-18.77	-	-
18	.24675	18.42	Ca	0	.1	10.1	28.62	-	-	51.87	-23.25
19	.29175	29.1	Qp	0	.1	10.1	39.3	60.47	-21.17	-	-
20	.29625	15.88	Ca	0	.1	10.1	26.08	-	-	50.35	-24.27
21	4.4385	21.58	Qp	0	.1	10.1	31.78	56	-24.22	-	-
22	4.35525	15.86	Ca	0	.1	10.1	26.06	-	-	46	-19.94
23	15.648	14.55	Qp	0	.2	10.2	24.95	60	-35.05	-	-
24	15.5783	7.96	Ca	0	.2	10.2	18.36	-	-	50	-31.64

## 11. DYNAMIC FREQUENCY SELECTION

### 11.1. OVERVIEW

#### 11.1.1. LIMITS

##### FCC

§15.407 (h), FCC KDB 905462 D02 "COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION" and KDB 905462 D03 "U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY".

**Table 1: Applicability of DFS requirements prior to use of a channel**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

**Table 2: Applicability of DFS requirements during normal operation**

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar DFS	Client (without DFS)
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required

**Note:** Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks.

**Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring**

Maximum Transmit Power	Value (see notes)
E.I.R.P. $\geq$ 200 milliwatt	-64 dBm
E.I.R.P. < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
E.I.R.P. < 200 milliwatt that do not meet power spectral density requirement	-64 dBm

**Note 1:** This is the level at the input of the receiver assuming a 0 dBi receive antenna  
**Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
**Note 3:** E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.

**Table 4: DFS Response requirement values**

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds (See Note 1)
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2)
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. (See Note 3)

**Note 1:** *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

**Note 2:** The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel move* (an aggregate of 60 milliseconds) during the remainder of the 10-second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

**Table 5 – Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a	Roundup: $\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests.					

**Table 6 – Long Pulse Radar Test Signal**


Radar Waveform Type	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

**Table 7 – Frequency Hopping Radar Test Signal**

Radar Waveform Type	Pulse Width (usec)	PRI (usec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

### 11.1.2. TEST AND MEASUREMENT SYSTEM

#### RADIATED METHOD SYSTEM BLOCK DIAGRAM

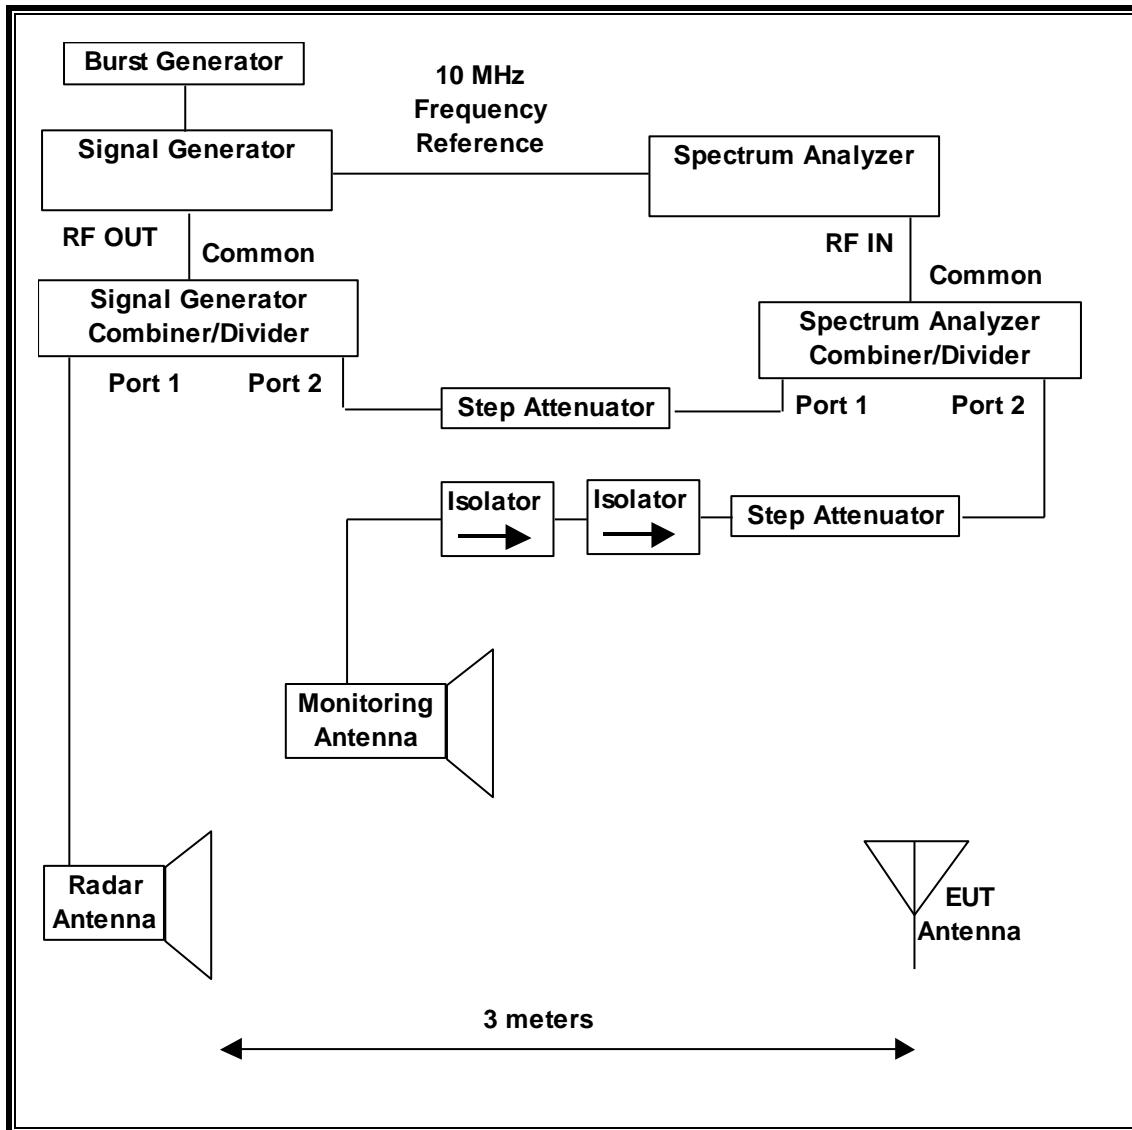

## SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from  $F_L$  to  $F_H$  for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

## SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

### **ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL**

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

### **TEST AND MEASUREMENT EQUIPMENT**

The following test and measurement equipment was utilized for the DFS tests documented in this report:

<b>TEST EQUIPMENT LIST</b>				
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Asset Number</b>	<b>Cal Due</b>
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	US51350187	06/13/17
Signal Generator, MXG X-Series RF Vector	Agilent	N5182B	MY51350337	04/21/18

#### **11.1.3. TEST ROOM ENVIRONMENT**

The test room temperature and humidity shall be maintained within normal temperature of 15~35 °C and normal humidity 20~75% (relative humidity).

### **ENVIRONMENT CONDITION**

<b>Parameter</b>	<b>Value</b>
Temperature	25.8 °C
Humidity	27 %


#### **11.1.4. TEST AND MEASUREMENT SOFTWARE**

The following test and measurement software was utilized for the tests documented in this report:

<b>TEST SOFTWARE LIST</b>		
<b>Name</b>	<b>Version</b>	<b>Test / Function</b>
Aggregate Time-PXA	3.0	Channel Loading and Aggregate Closing Time
PXA Read	3.0.0.9	Signal Generator Screen Capture
SGXProject.exe	1.7	Radar Waveform Generation and Download

### 11.1.5. SETUP OF EUT (CLIENT MODE)

#### RADIATED METHOD EUT TEST SETUP

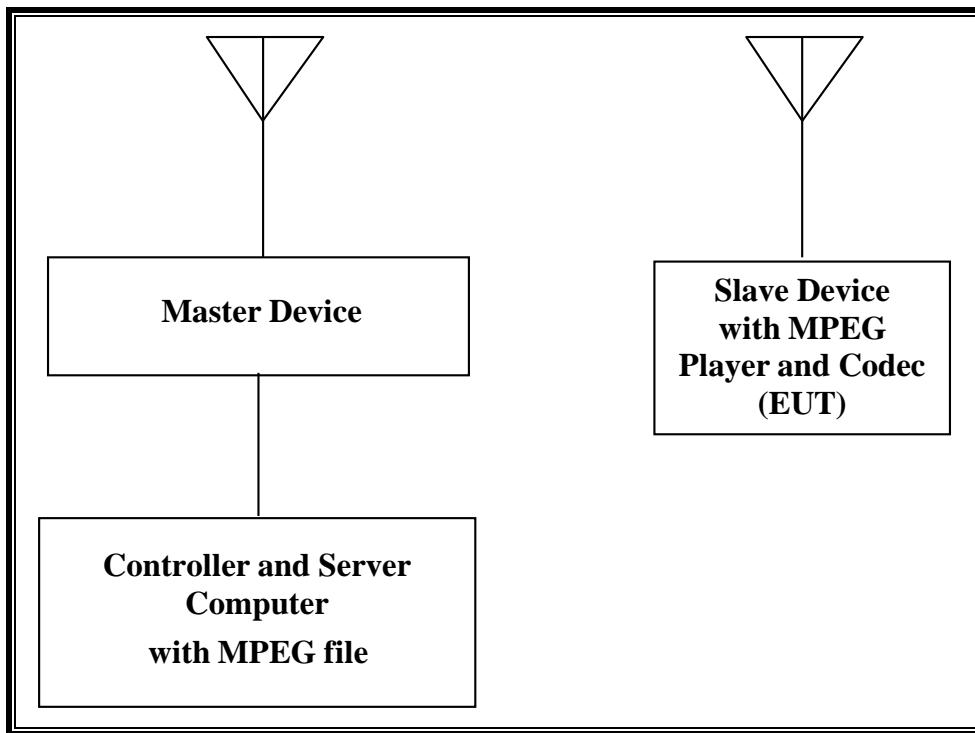


#### SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
802.11a/b/g/n/ac Wireless Router (Master Device)	Apple	A1521	C86LCE5GFJ1R	BCGA1521
Notebook PC (Controller/Server)	Apple	A1181	4H629022WLV	DoC
AC Adapter (Notebook PC)	Apple	A1343	C0424760BMPF1Y7AB	DoC

### 11.1.6. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)

#### RADIATED METHOD EUT TEST SETUP

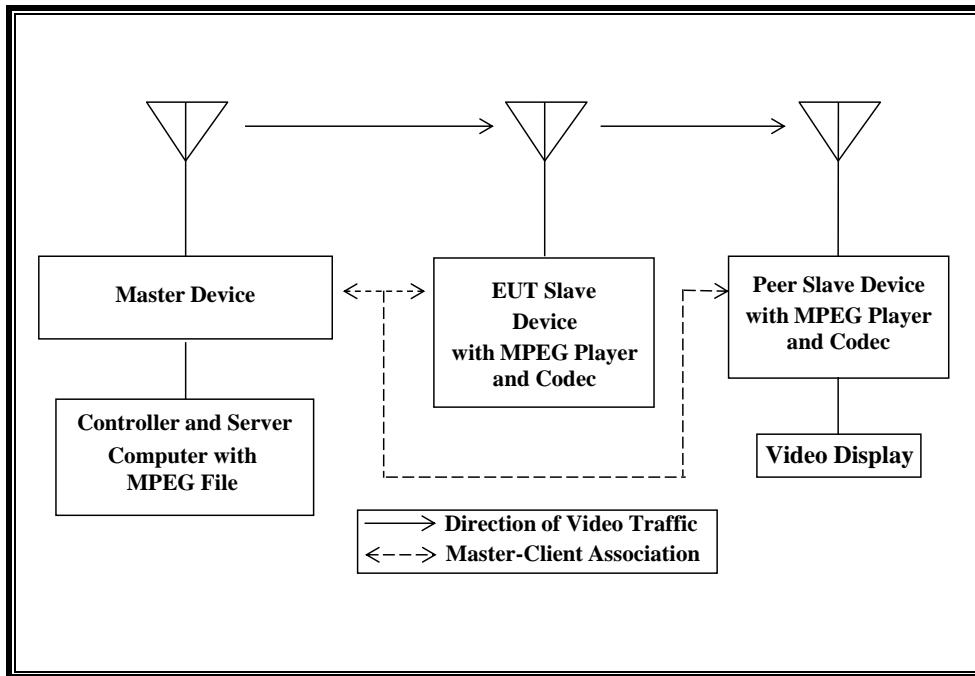


#### SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:


PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
802.11a/b/g/n/ac Wireless Router (Master Device)	Apple	A1521	C86LCE5GFJ1R	BCGA1521
Notebook PC (Controller/Server)	Apple	A1181	4H629022WLV	DoC
AC Adapter (Notebook PC)	Apple	A1343	C0424760BMPF1Y7AB	DoC
Peer Slave Device	Apple	A1625	C07S4033HHFP	BCGA1625
15" LCD TV (Video Display)	Polaroid	TLX-01511C	02006	DoC

### 11.1.7. SETUP OF EUT (PEER TO PEER MODE)

#### RADIATED METHOD EUT TEST SETUP WHEN MONITORING THE EUT

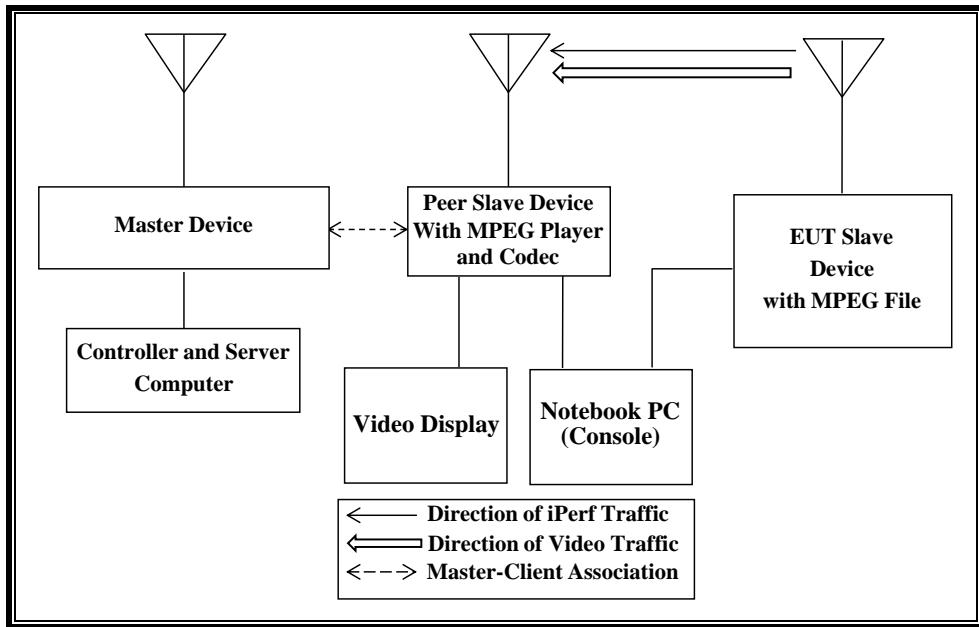

**RADIATED METHOD EUT TEST SETUP WHEN MONITORING THE PEER SLAVE DEVICE)**

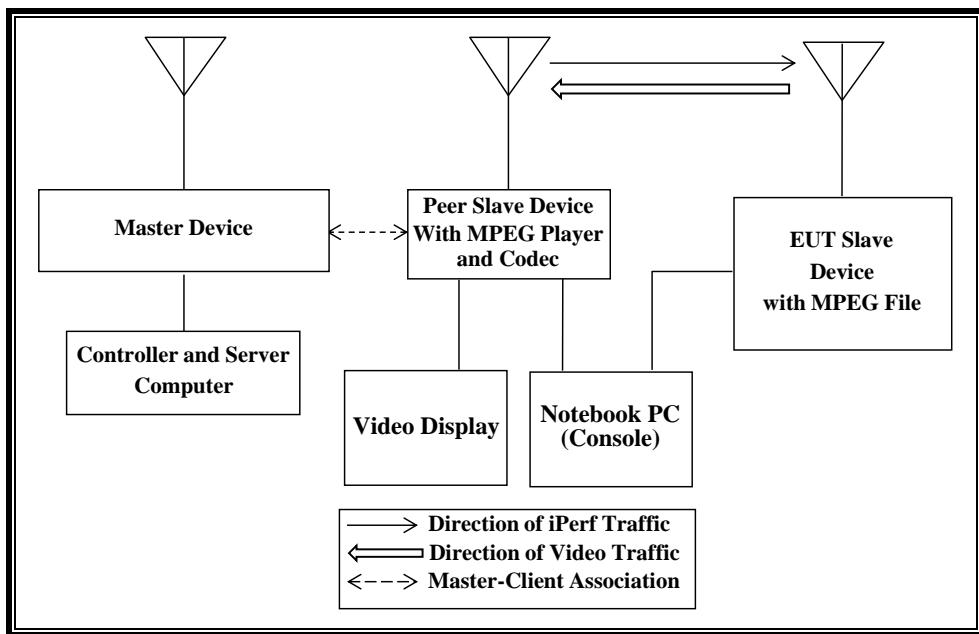

**SUPPORT EQUIPMENT**

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
802.11a/b/g/n/ac Wireless Router (Master Device)	Apple	A1521	C86LCE5GFJ1R	BCGA1521
Notebook PC (Controller/Server)	Apple	A1181	4H629022WLV	DoC
AC Adapter (Notebook PC)	Apple	A1343	C0424760BMPF1Y7AB	DoC
Apple TV (Peer Slave Device)	Apple	A1625	C07S4033HHFP	BCGA1625
Notebook PC (Peer Console)	Apple	A1466	C2QLN093FKYR	DoC
AC Adapter (Console PC)	Apple	A1424	C06520721HYG6P4AH	DoC
15" LCD TV (Video Display)	Polaroid	TLX-01511C	02006	DoC

### 11.1.8. DESCRIPTION OF EUT

For FCC the EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 20.41 dBm EIRP in the 5250-5350 MHz band and 21.38 dBm EIRP in the 5470-5725 MHz band.

Only UAT 2 and LAT 3 assembly utilized with the EUT has a gain of -3.74dBi and -1.09 dBi in the 5250-5350 MHz band and -0.75 dBi and -0.96 dBi in the 5470-5725 MHz band.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is  $-64 + 1 = -63$  dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses two transmitter/receiver chains, each connected to an antenna to perform radiated tests.

In **Standard Client mode** WLAN traffic that meets or exceeds the minimum required loading was generated by streaming the compressed version of the video test file "6 ½ Magic Hours" from the Master to the Slave.

In **Client to Client mode** WLAN traffic is generated by streaming the compressed version of the video test file "6 ½ Magic Hours" from the Master to the Slave and then on to the peer slave device in full motion video mode using QuickTime media player and embedded proprietary AirPlay software.

In **Peer to Peer mode while monitoring the EUT**, WLAN traffic is generated with the combination of streaming the compressed version of the video test file "6 ½ Magic Hours" from the EUT to the Peer Slave Device in full motion video mode using QuickTime media player and embedded proprietary AirPlay software and Iperf from the EUT to the Peer Slave Device.

In **Peer to Peer mode while monitoring the Peer Slave Device**, WLAN traffic is generated with the combination of streaming the compressed version of the video test file "6 ½ Magic Hours" from the EUT to the Peer Slave Device in full motion video mode using QuickTime media player and embedded proprietary AirPlay software and Iperf from the Peer Slave Device to the EUT.

While performing Peer to Peer Mode testing only the Peer Slave Device is associated to the Master Device.

The Peer to Peer mode has been reviewed and approved as compliant with the DFS requirements for client devices by the FCC via KDB enquiry. The enquiry confirmed that the test cases used adequately demonstrate compliance with DFS requirements for client devices.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the access point is revision 7.7.4 f0 dev.

The software installed in the EUT is 11.0 (15A284).

#### **UNIFORM CHANNEL SPREADING**

This function is not required per KDB 905462.

#### **OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS**

The Master Device is an Apple, Inc. Access Point, FCC ID: BCGA1521. The minimum antenna gain for the Master Device is 1.4 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is  $-64 + 1 = -63$  dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The software installed in the access point is revision 7.7.4 f0 dev.


## 11.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH

### 11.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

### 11.2.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

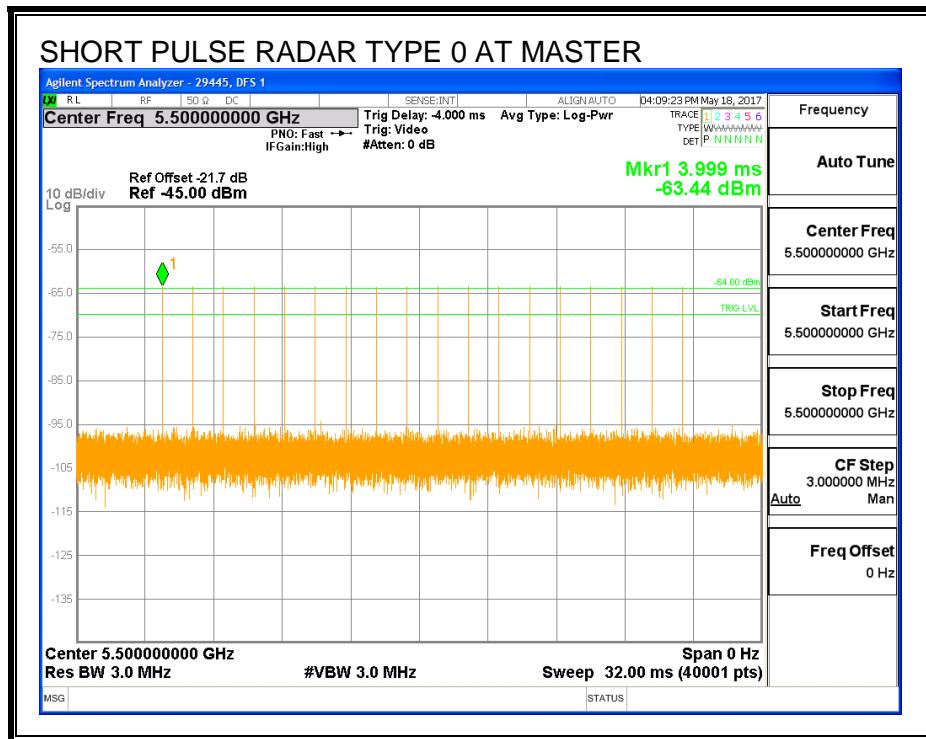

## **TRAFFIC**

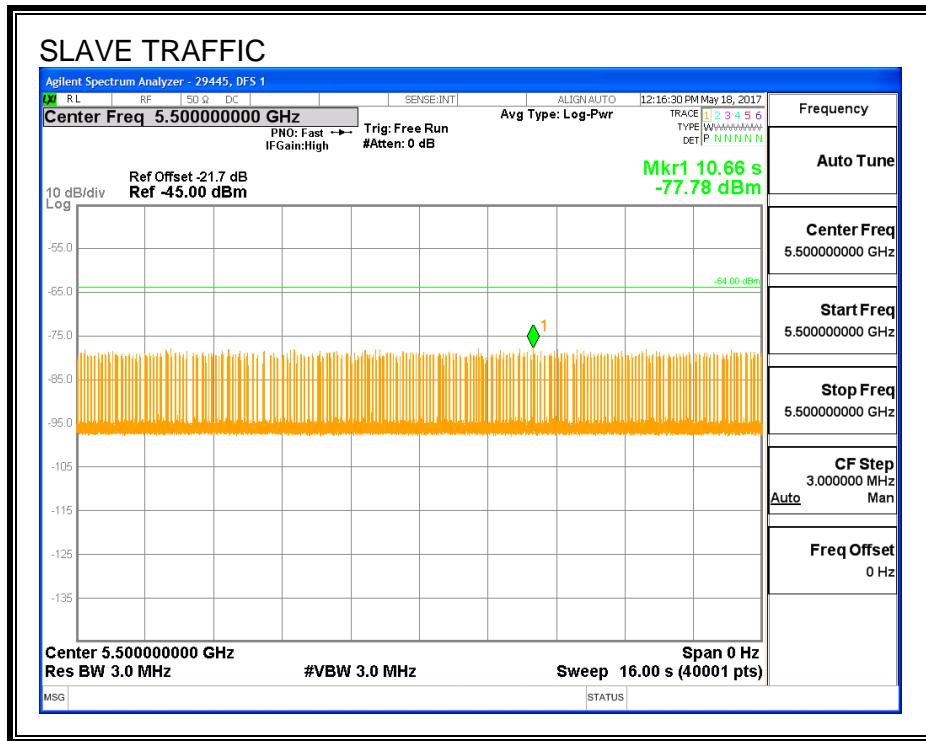

## CHANNEL LOADING

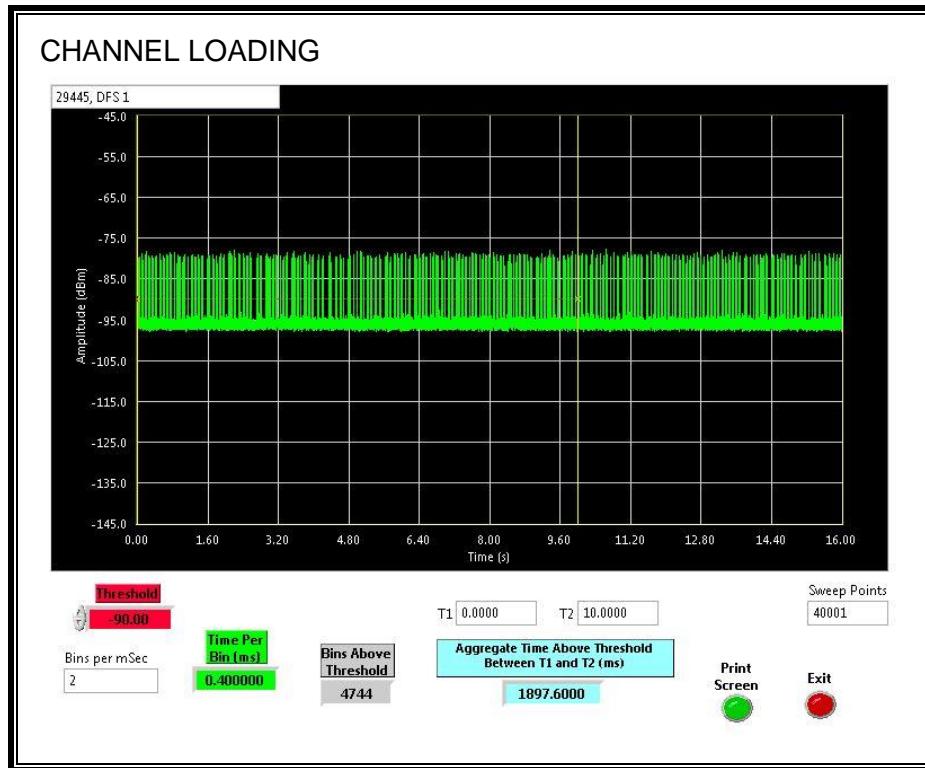

The level of traffic loading on the channel by the EUT is 18.97%

### 11.2.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.2.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
4.033	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
17.6	60

**MOVE TIME**

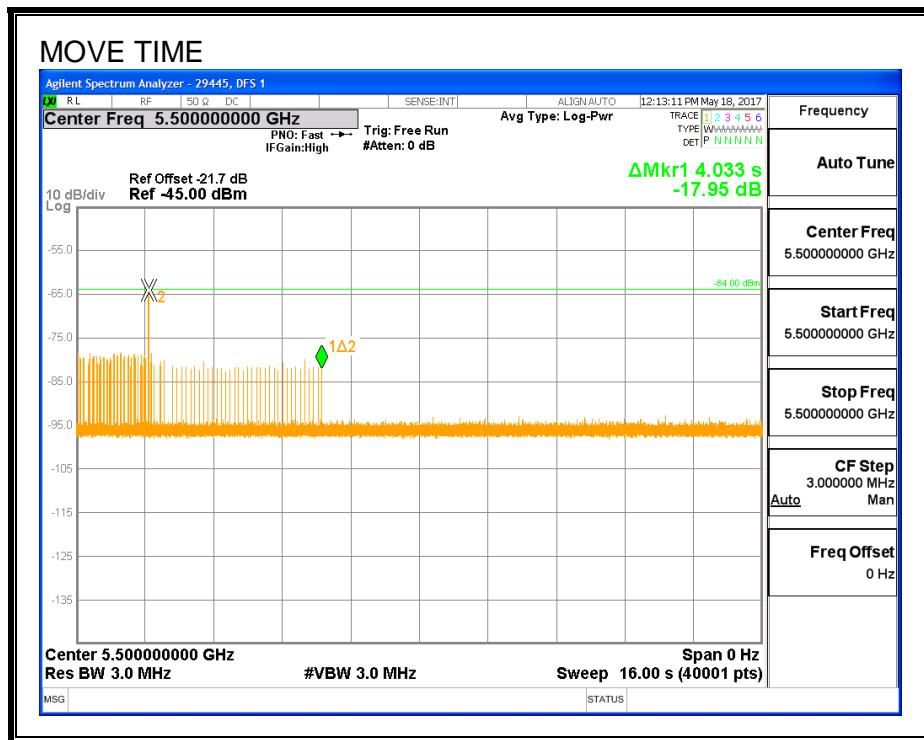


**CHANNEL CLOSING TIME**

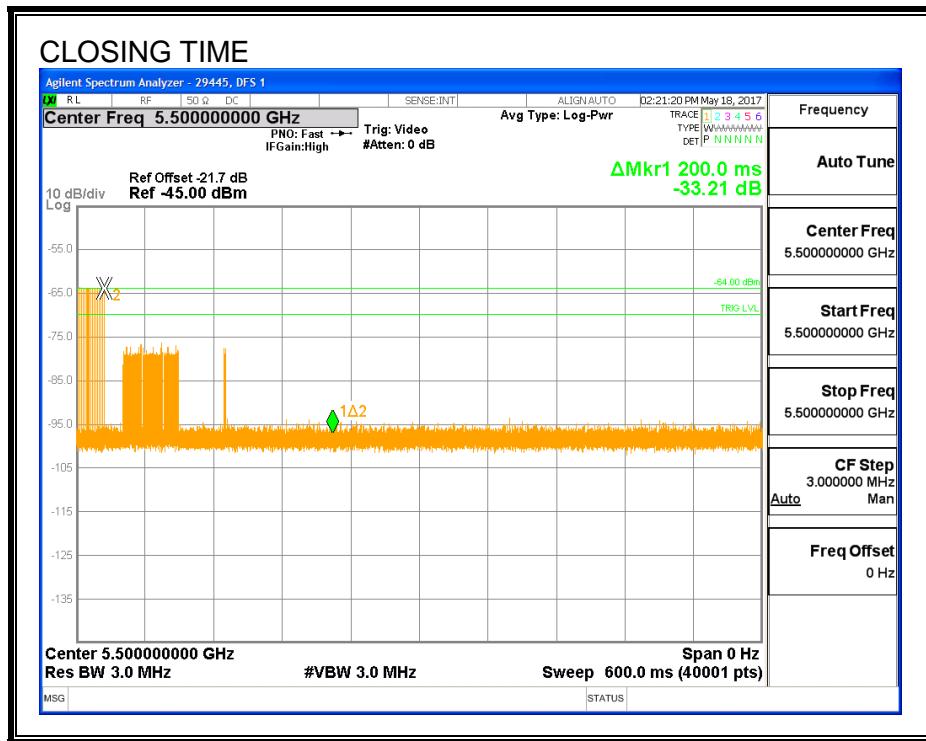

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

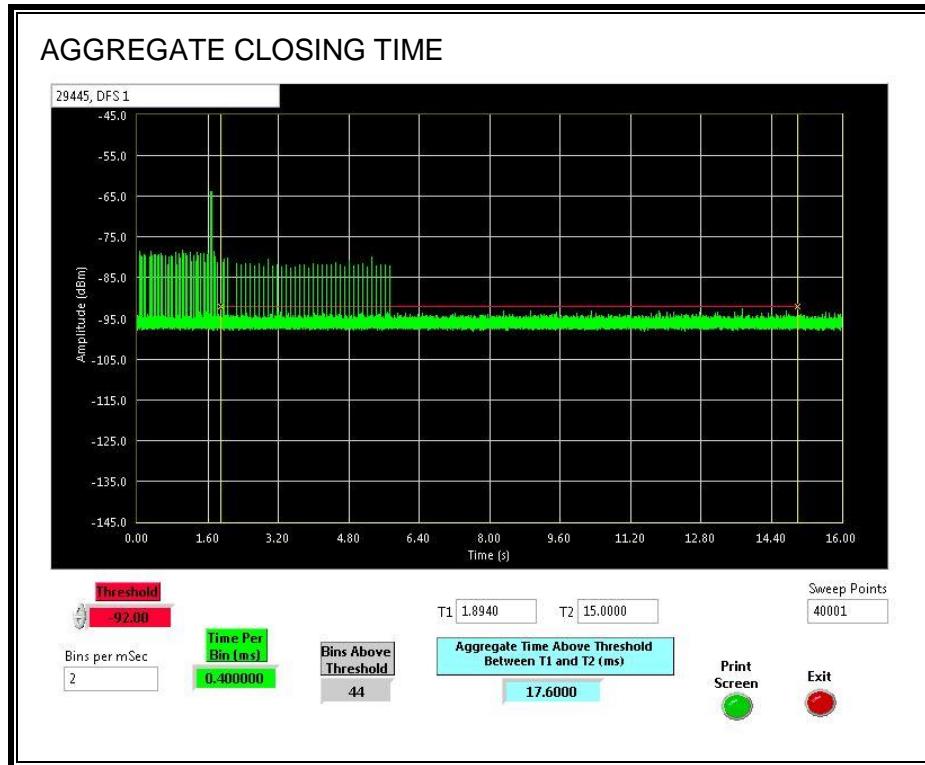


## 11.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH

### 11.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

### 11.3.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

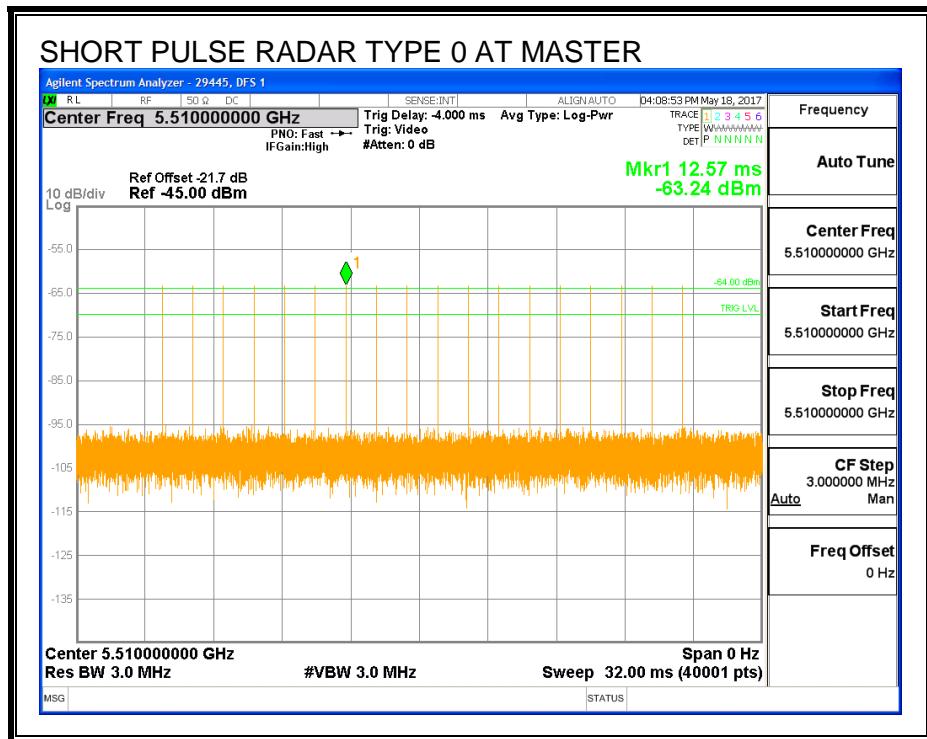

## TRAFFIC

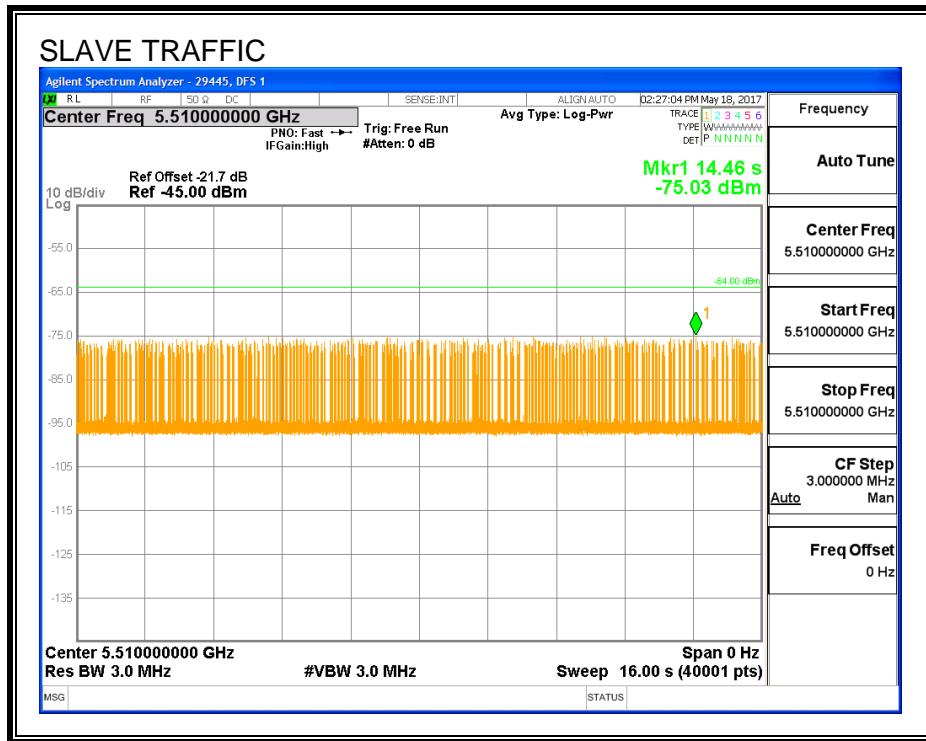

## CHANNEL LOADING

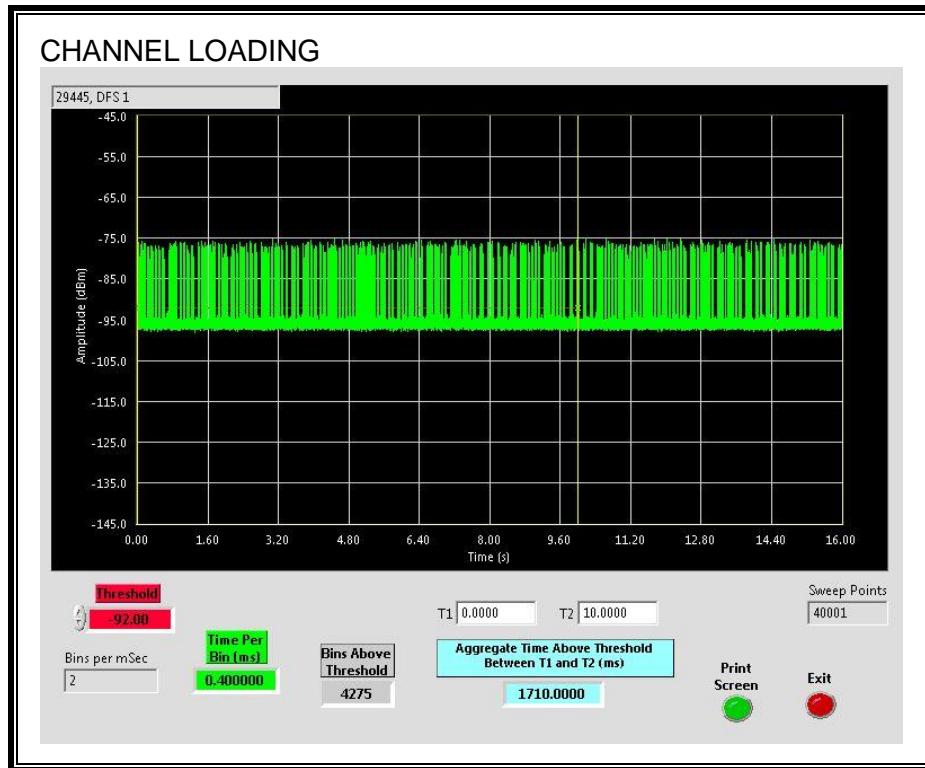

The level of traffic loading on the channel by the EUT is 17.1%

### 11.3.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.3.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.156	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

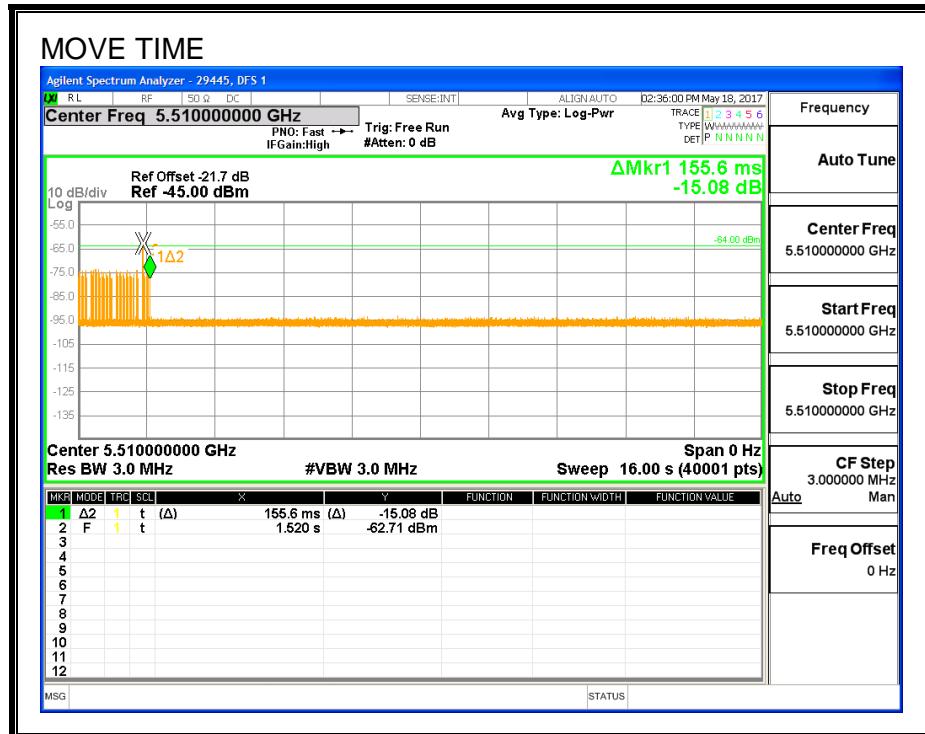


**CHANNEL CLOSING TIME**

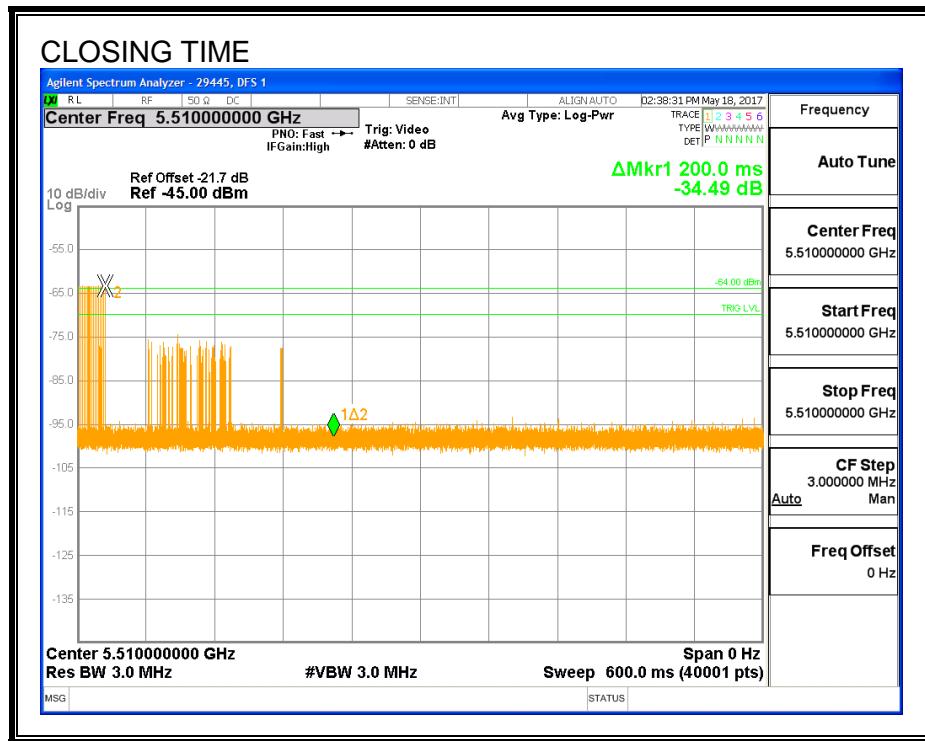

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

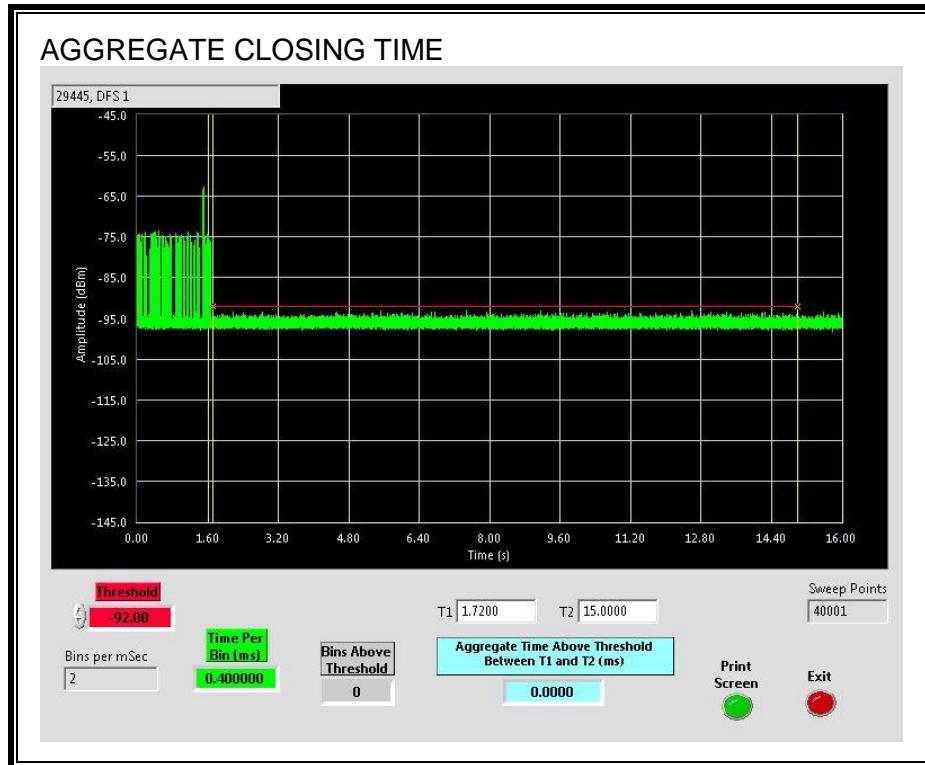


## 11.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH

### 11.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

### 11.4.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

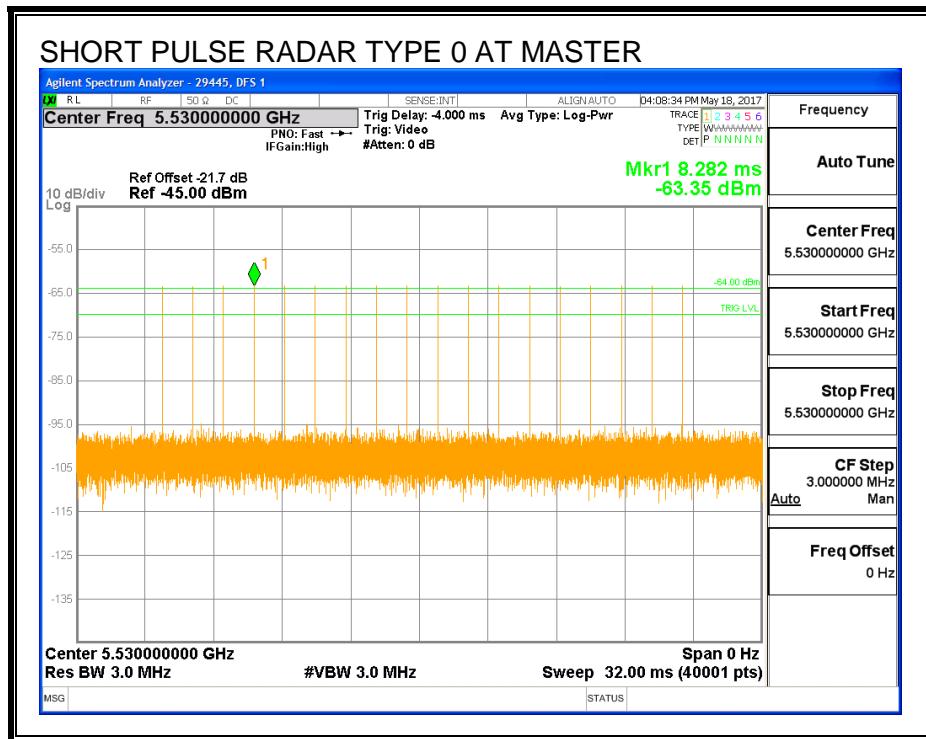

## **TRAFFIC**

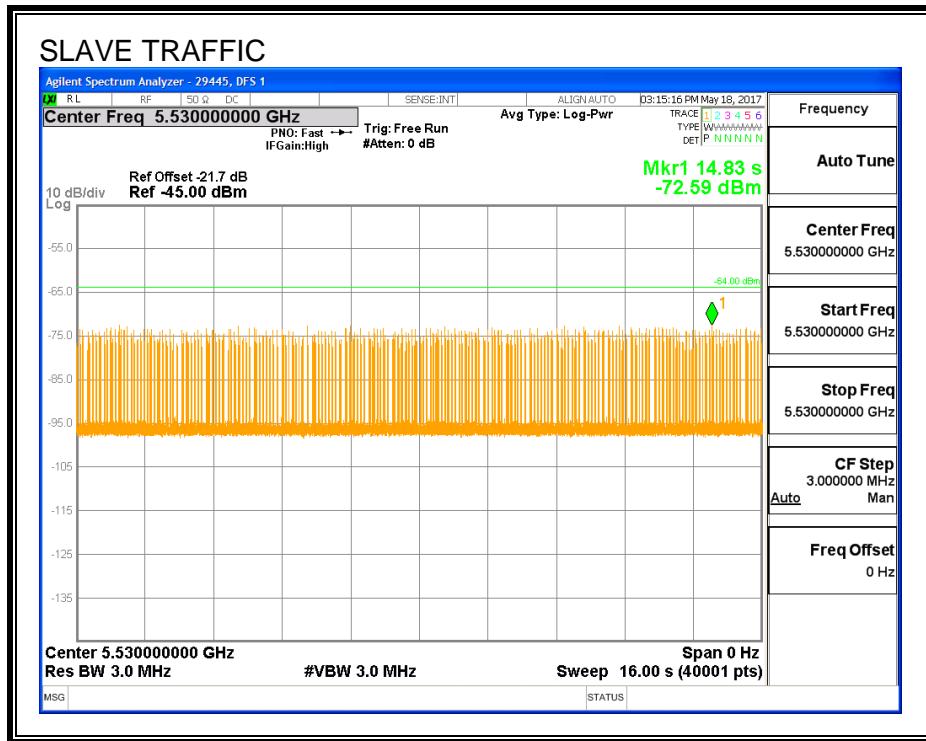

## CHANNEL LOADING

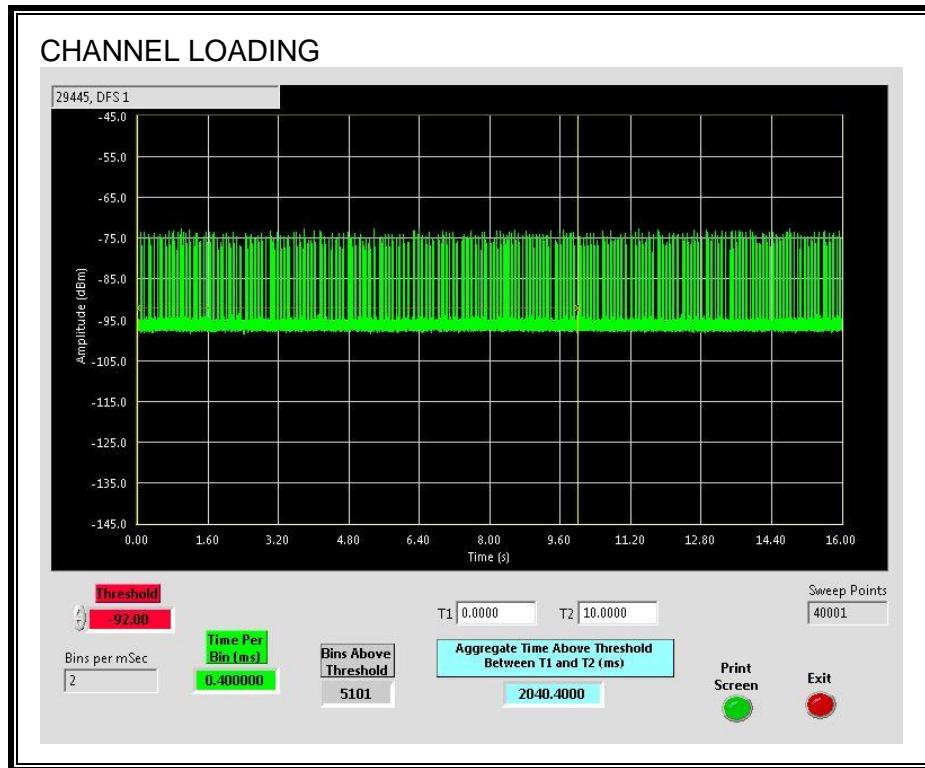

The level of traffic loading on the channel by the EUT is 20.404%

### 11.4.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.4.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.083	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

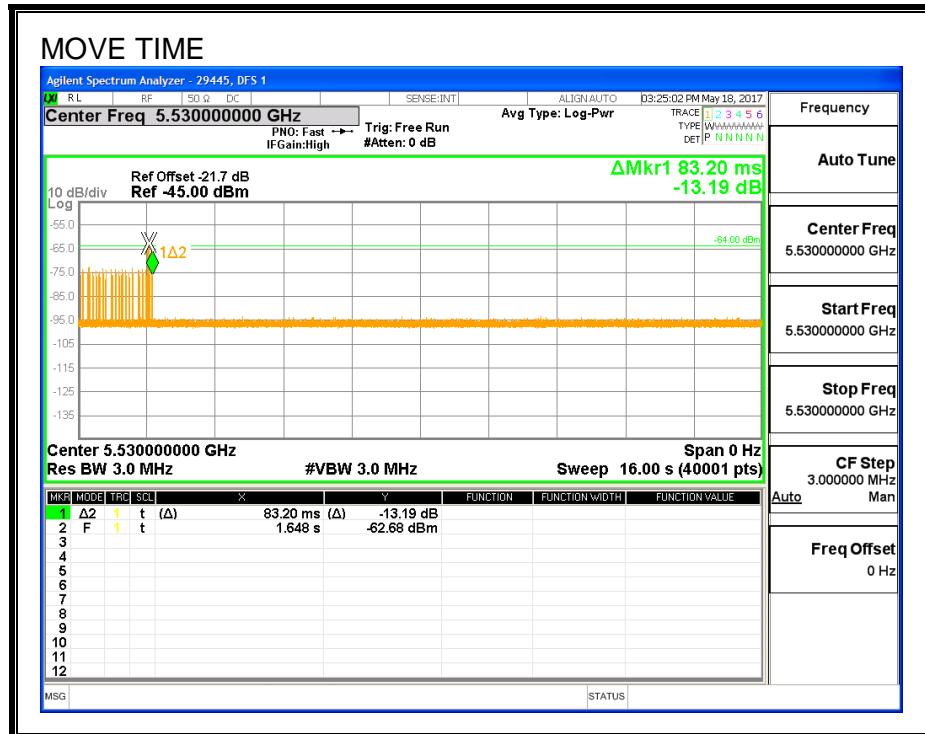


**CHANNEL CLOSING TIME**

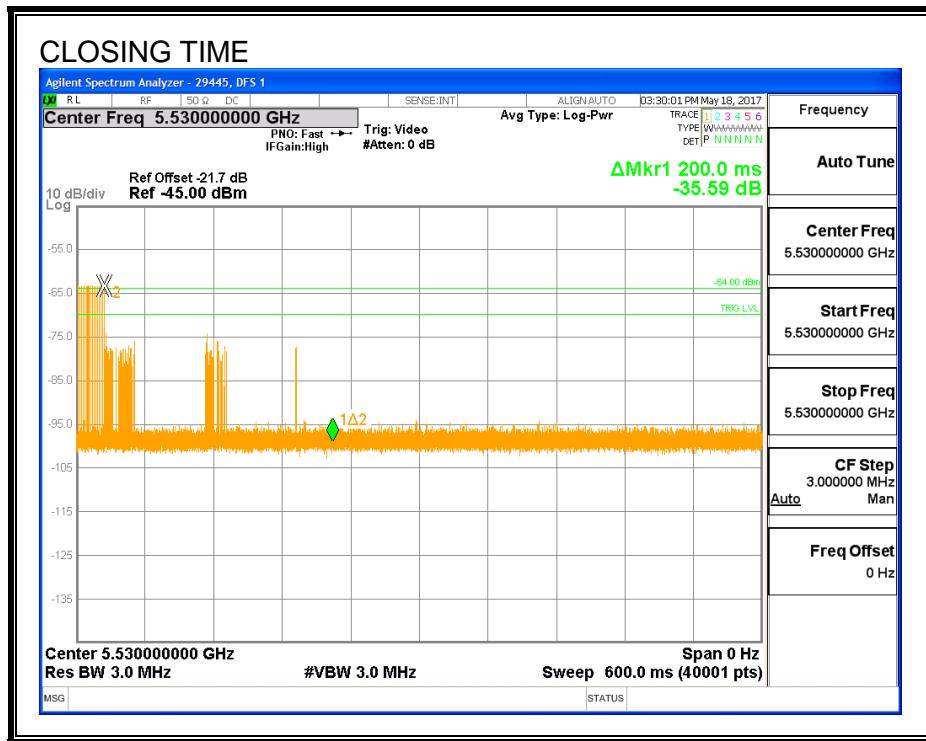

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

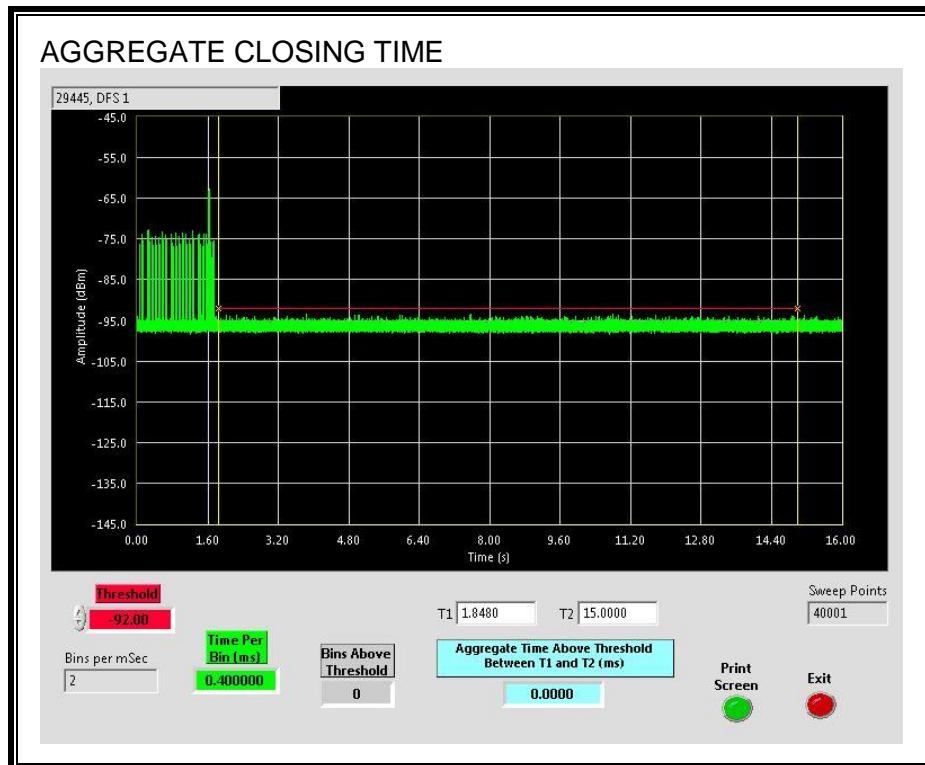

#### 11.4.5. 30-MINUTE NON-OCCUPANCY PERIOD

## **RESULTS**

No EUT transmissions were observed on the test channel during the 30-minute observation time.

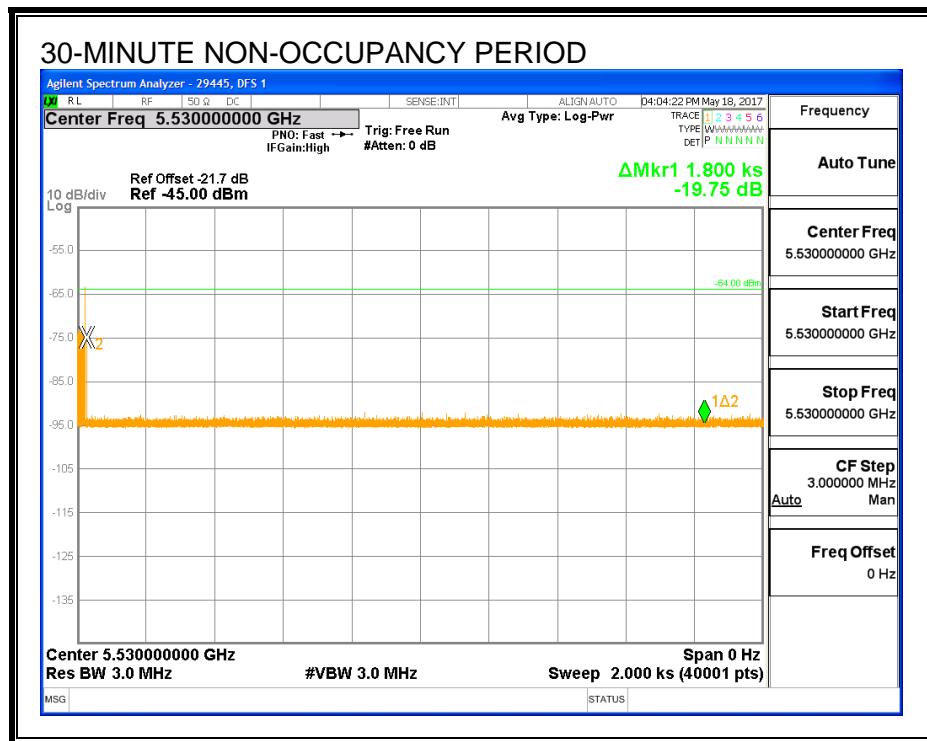


## 11.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH

### 11.5.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

### 11.5.2. RADAR WAVEFORM AND TRAFFIC


## RADAR WAVEFORM

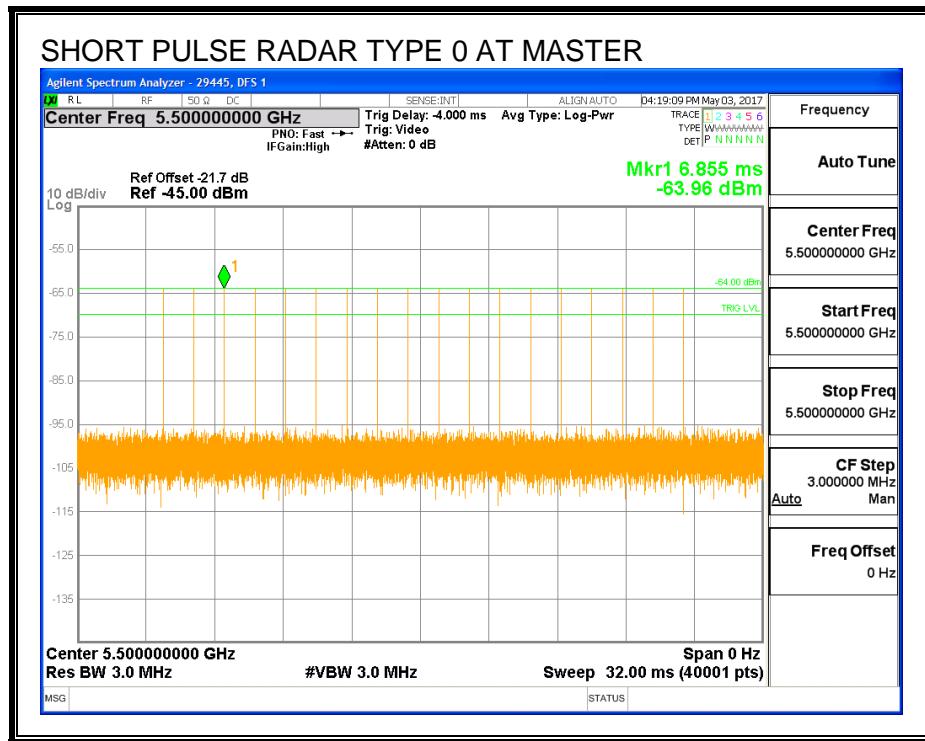

## **TRAFFIC**

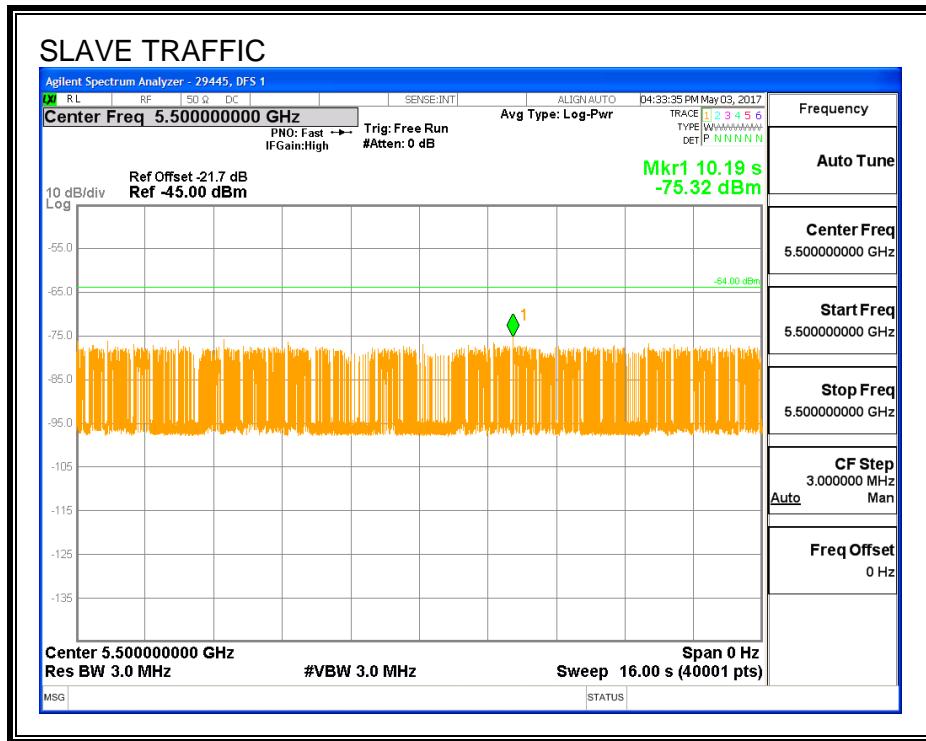

## CHANNEL LOADING

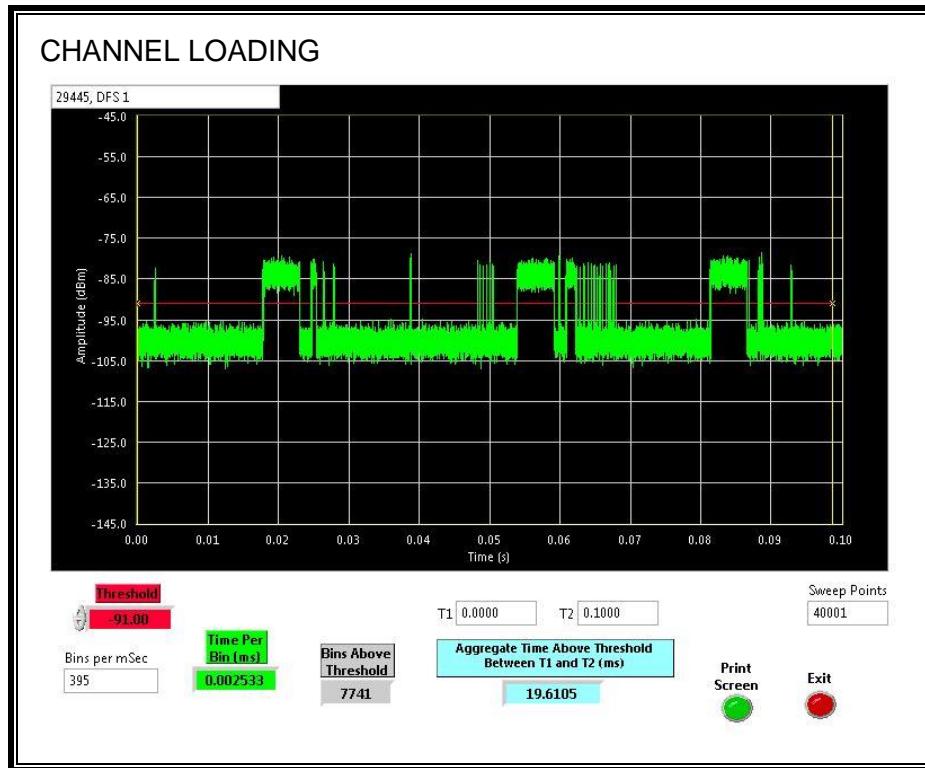

The level of traffic loading on the channel by the EUT is 19.6105%

### 11.5.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.5.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.2032	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.40	60

**MOVE TIME**

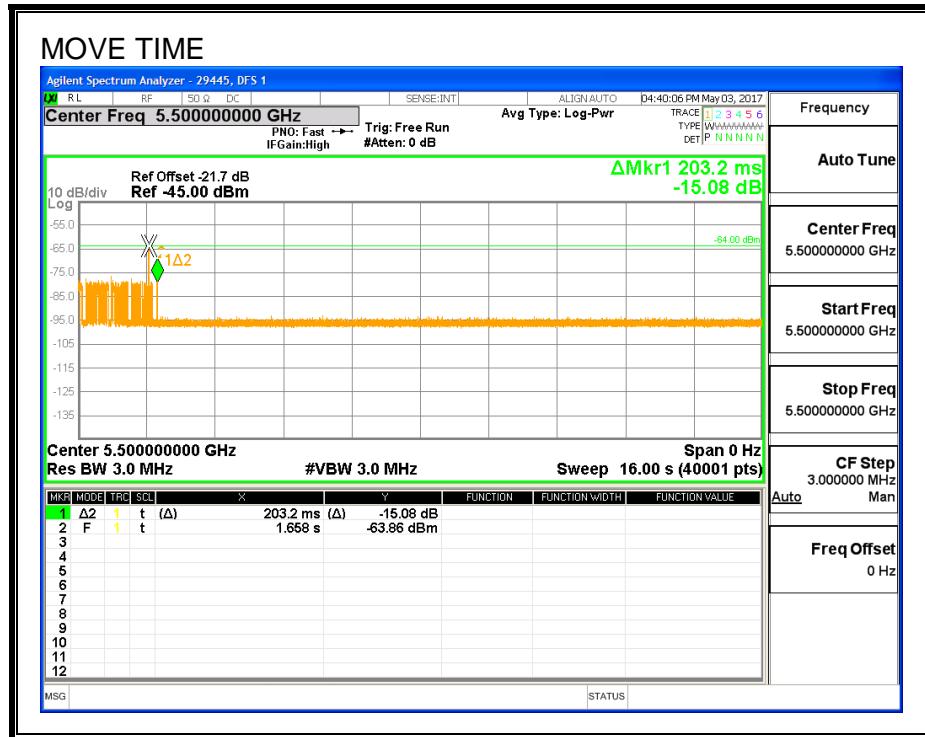


**CHANNEL CLOSING TIME**

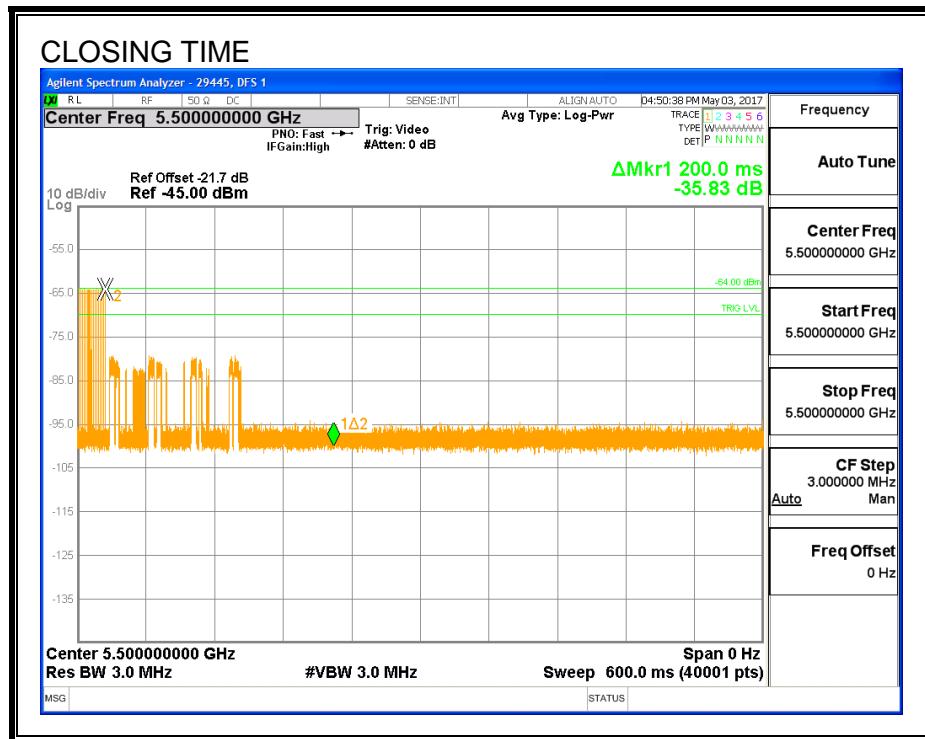

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

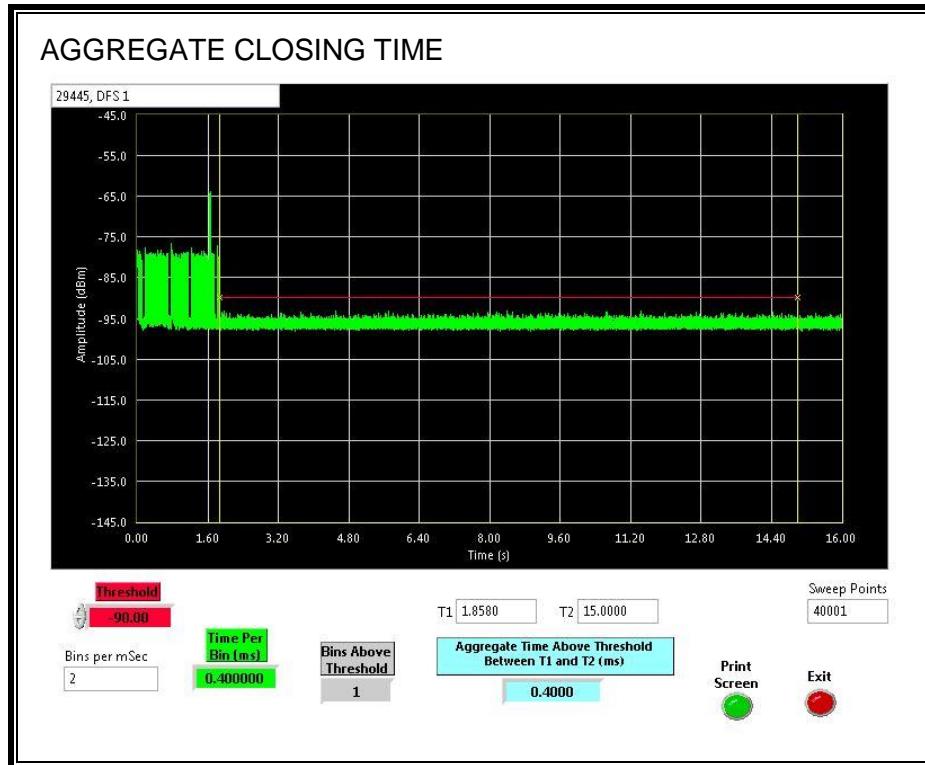


## 11.6. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH

### 11.6.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

### 11.6.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

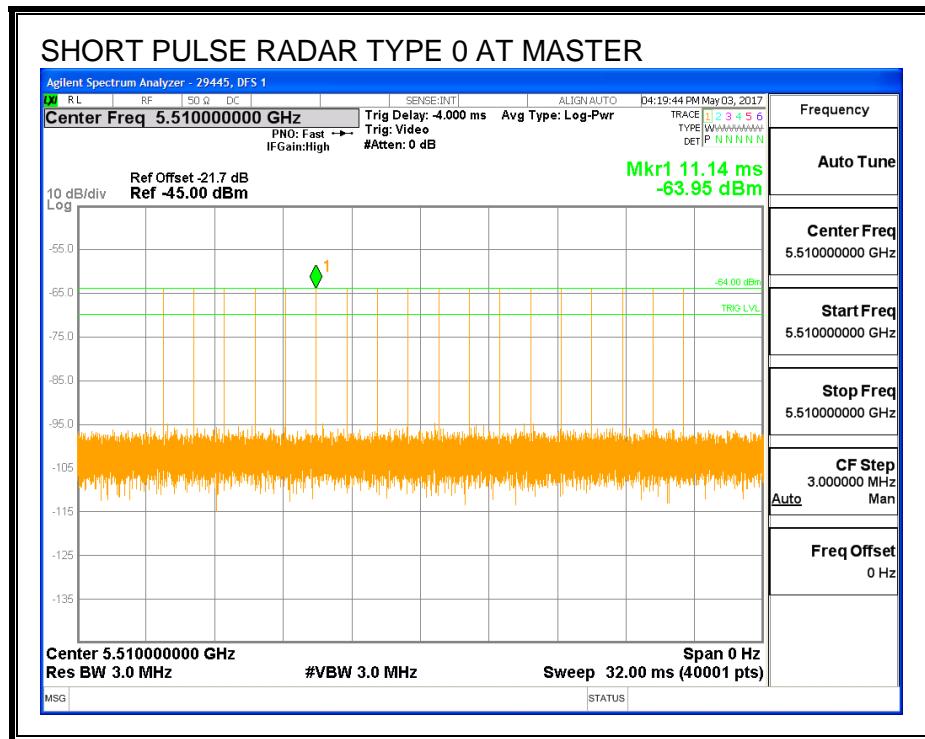

## **TRAFFIC**

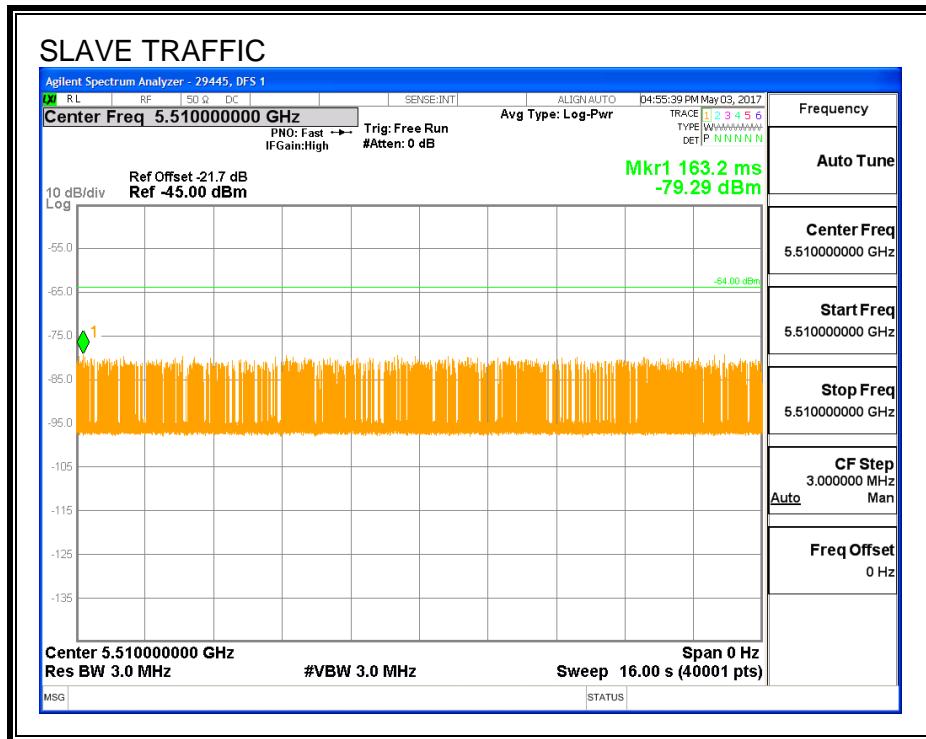

## CHANNEL LOADING

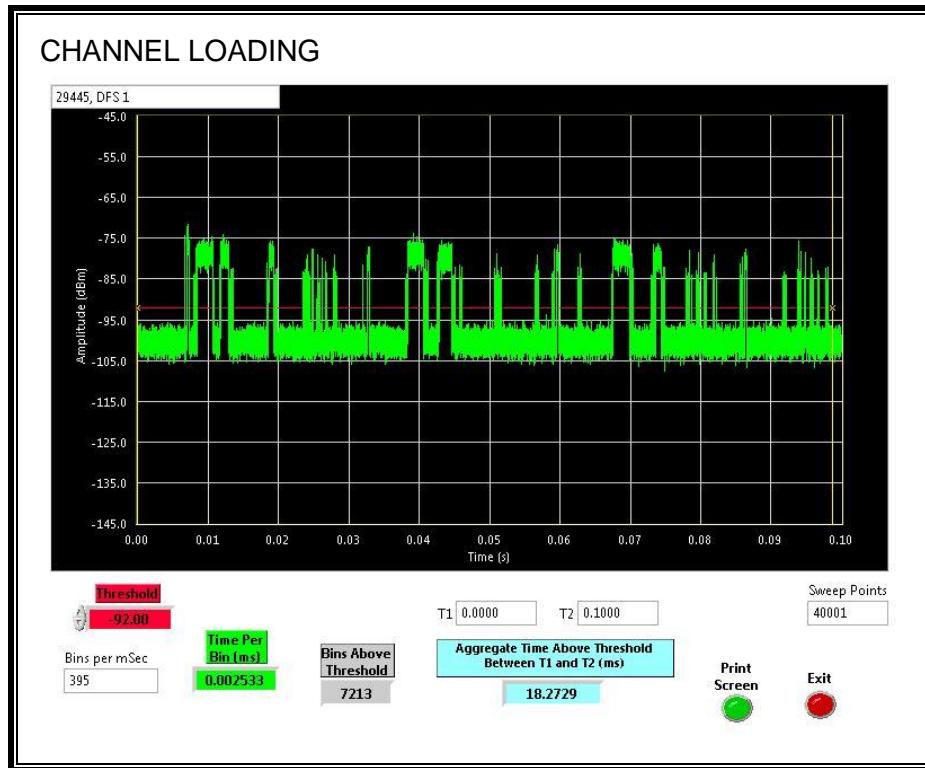

The level of traffic loading on the channel by the EUT is 18.272%

### 11.6.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.6.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.108	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

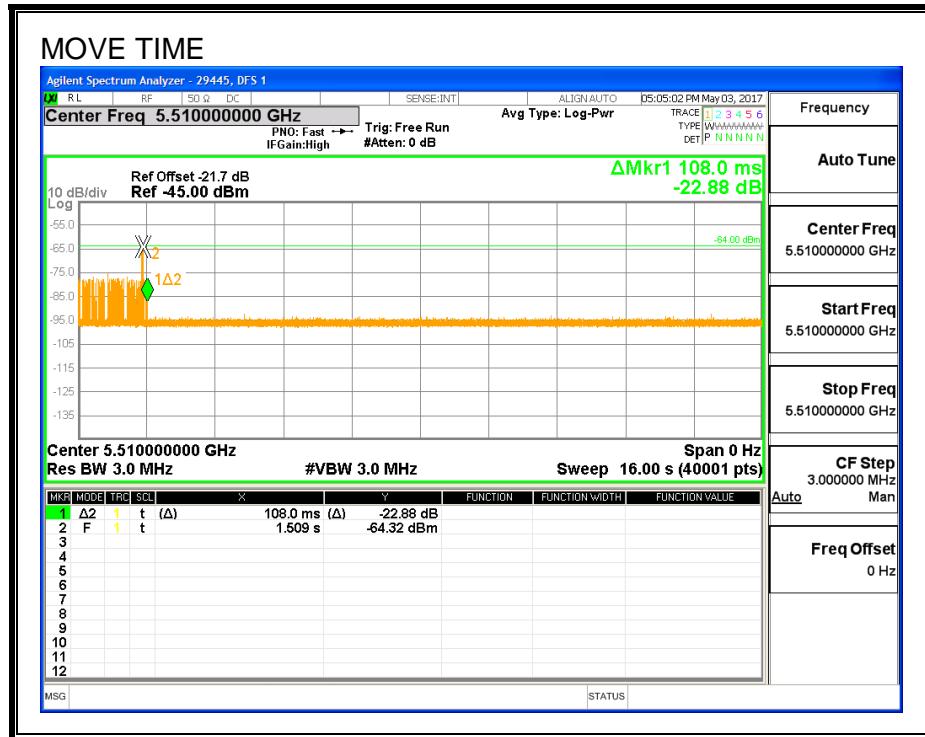

**CHANNEL CLOSING TIME**

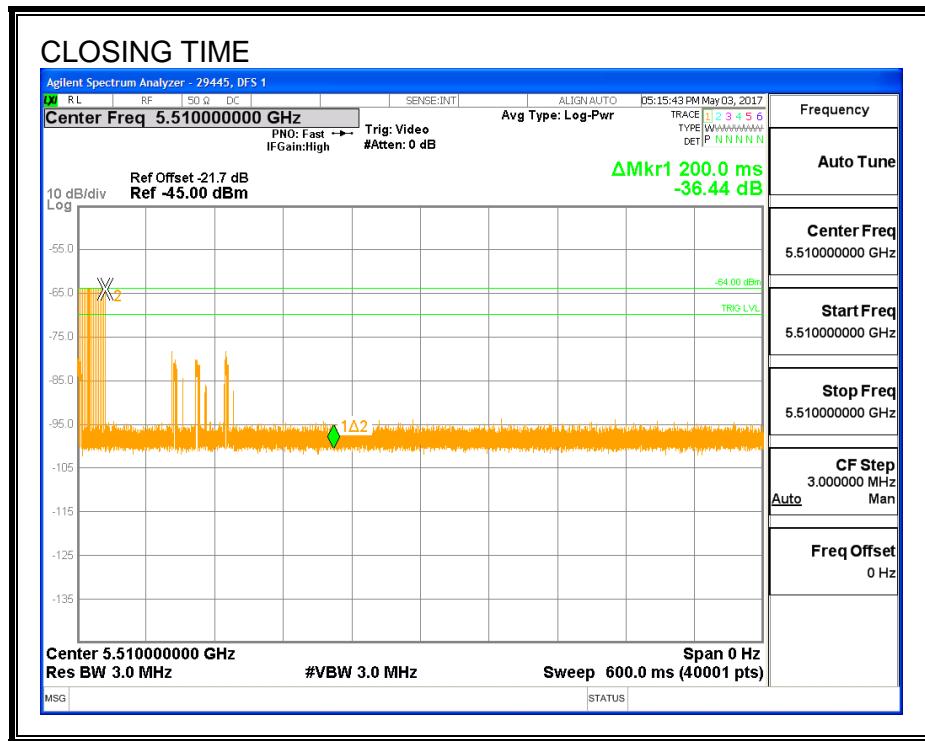

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.




## 11.7. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH

### 11.7.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

### 11.7.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

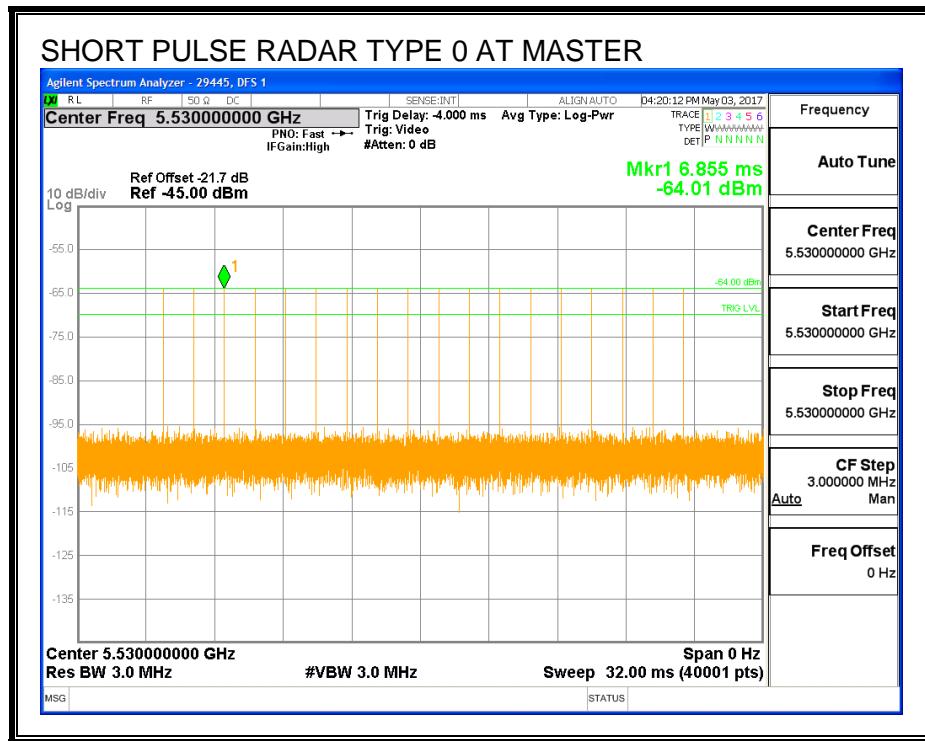

## **TRAFFIC**

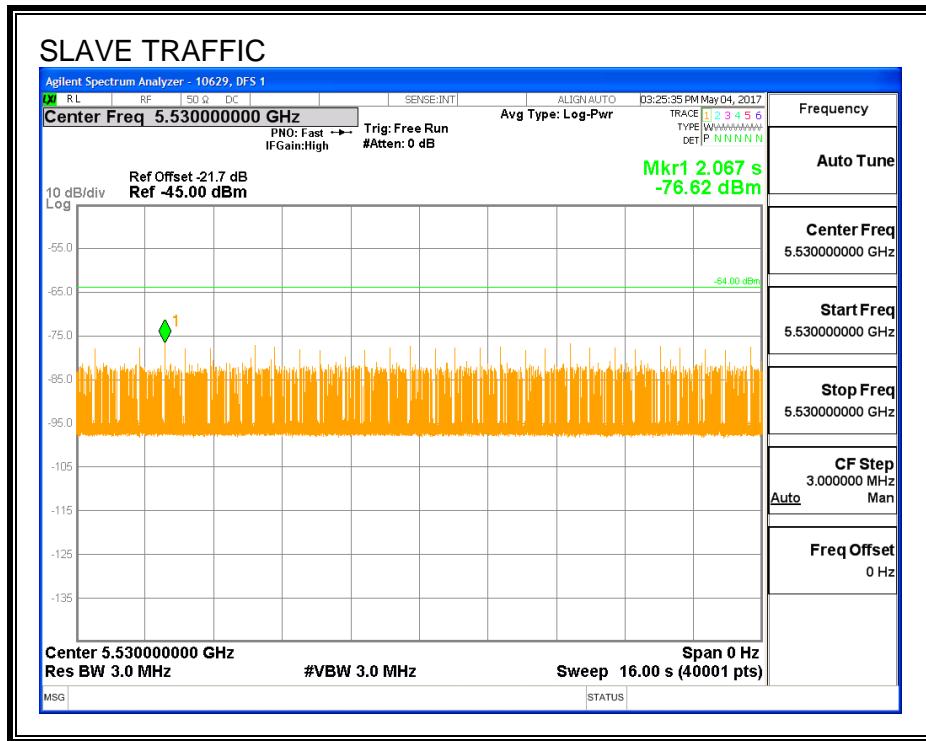

## CHANNEL LOADING

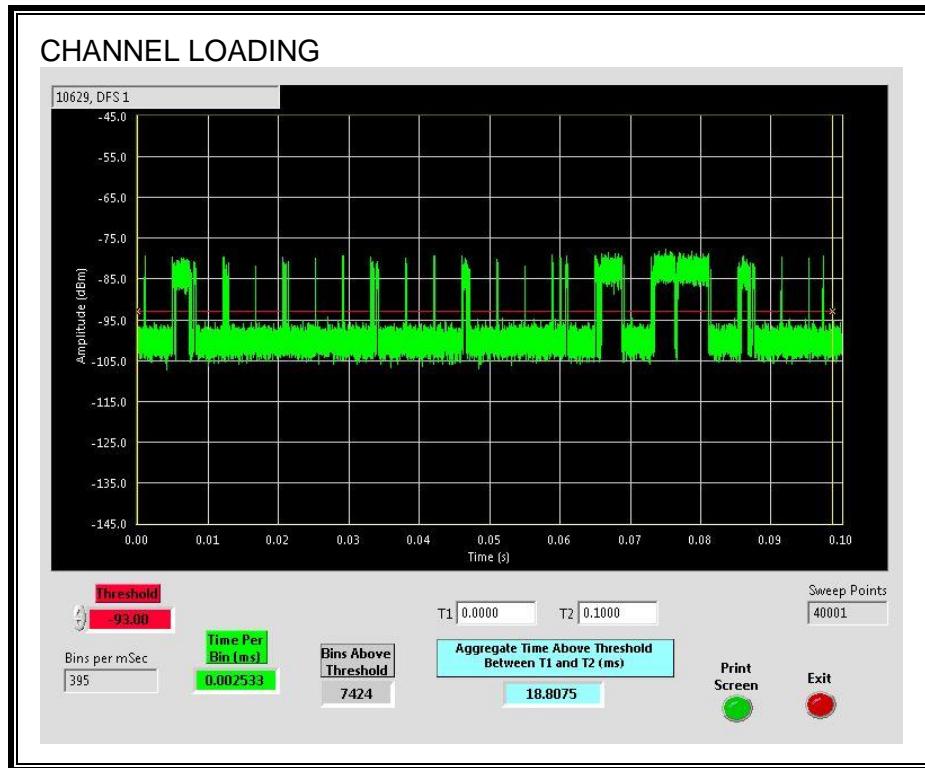

The level of traffic loading on the channel by the EUT is 18.8075%

### 11.7.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.7.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.057	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

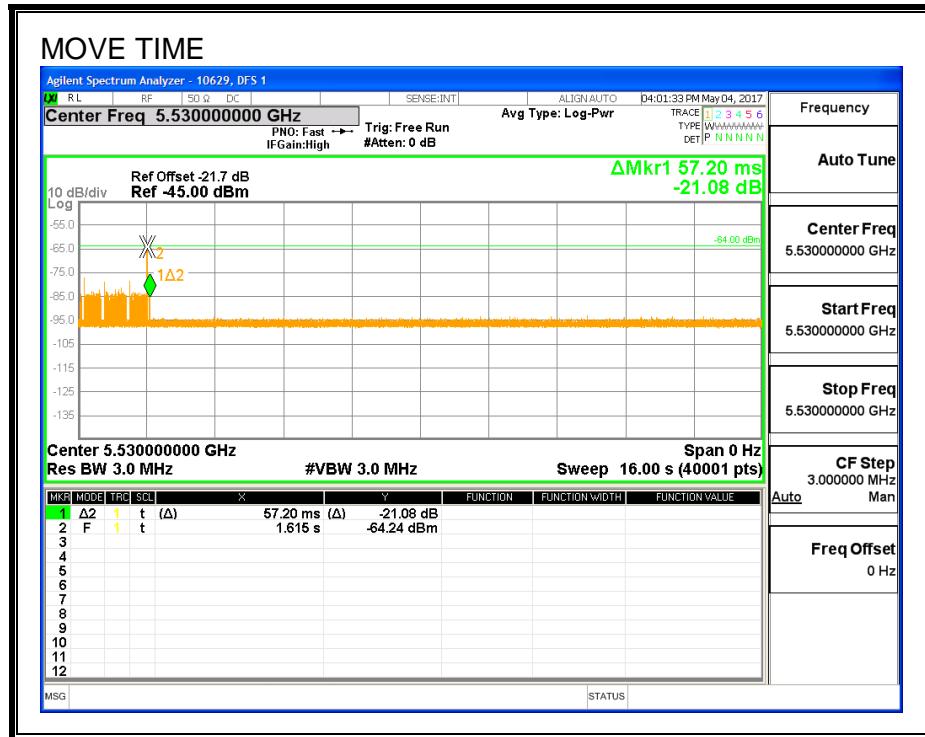


**CHANNEL CLOSING TIME**

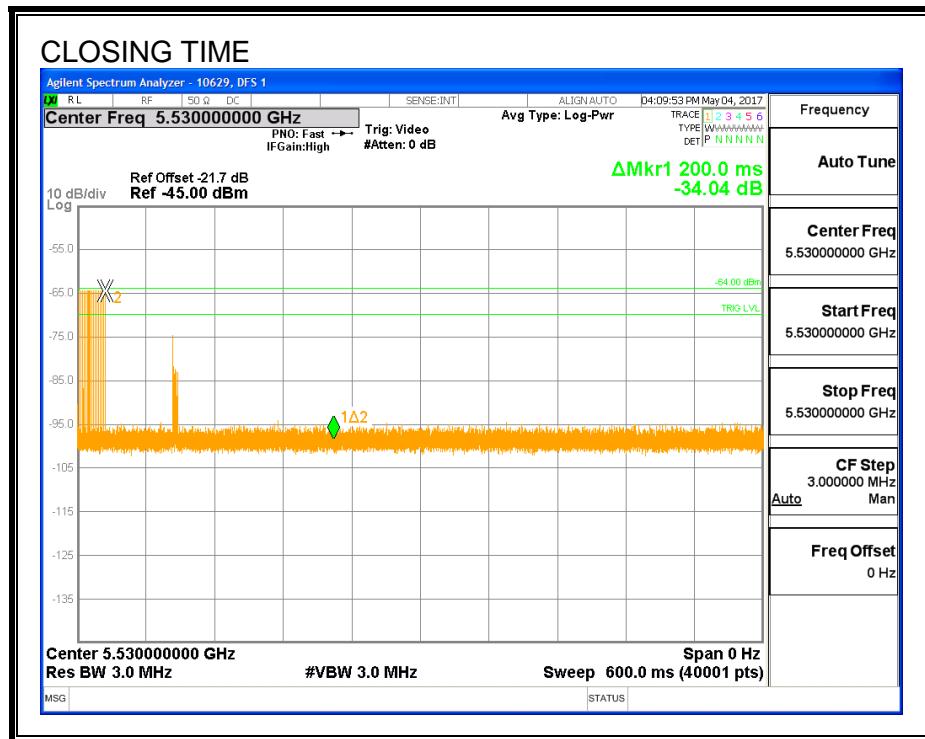

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

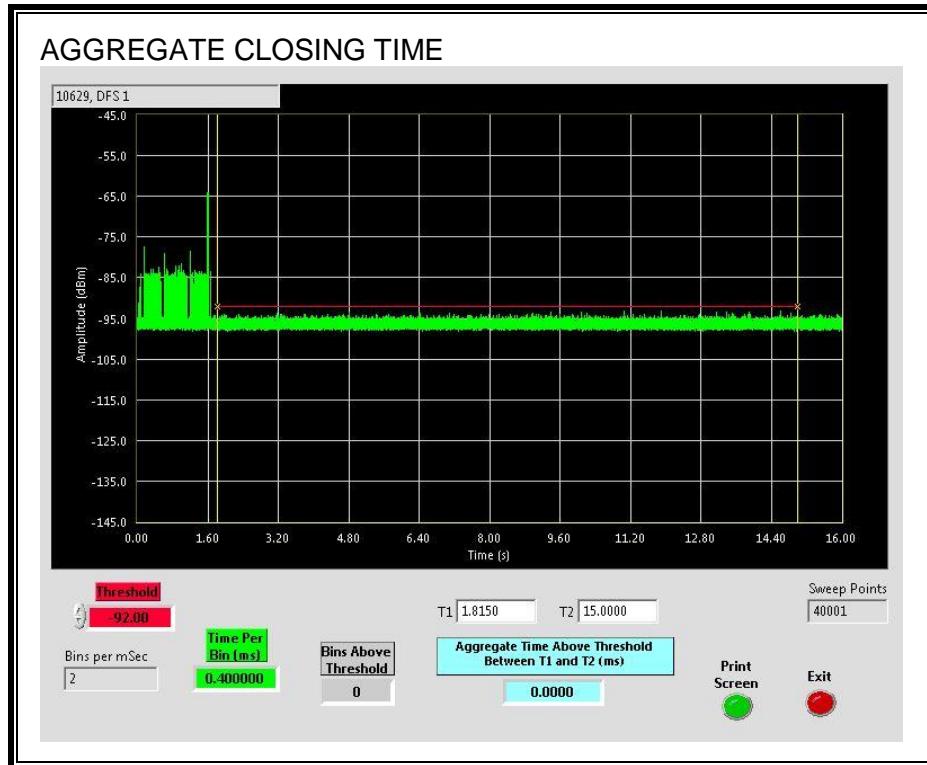

### 11.7.5. 30-MINUTE NON-OCCUPANCY PERIOD

## **RESULTS**

No EUT transmissions were observed on the test channel during the 30-minute observation time.

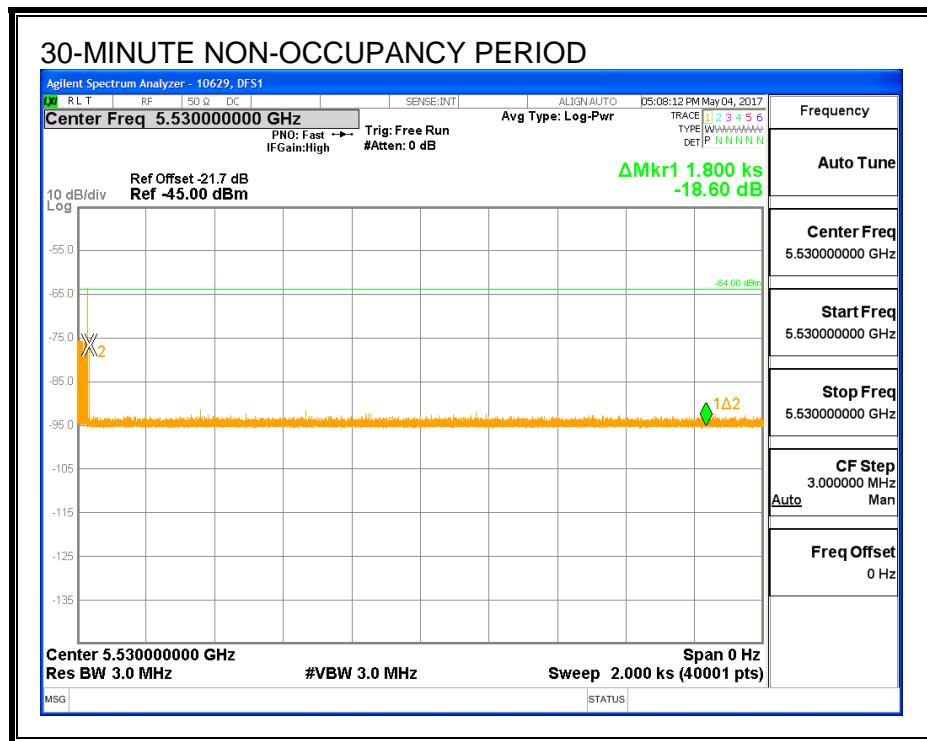


## 11.8. PEER TO PEER MODE EUT RESULTS FOR 20 MHz BANDWIDTH

### 11.8.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

### 11.8.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

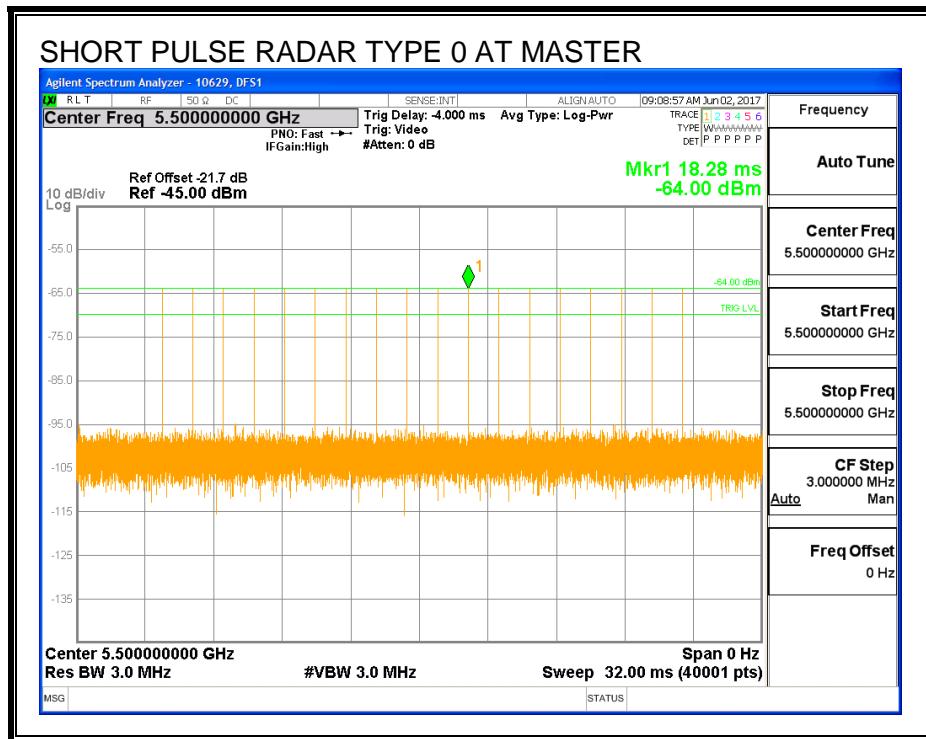

## TRAFFIC

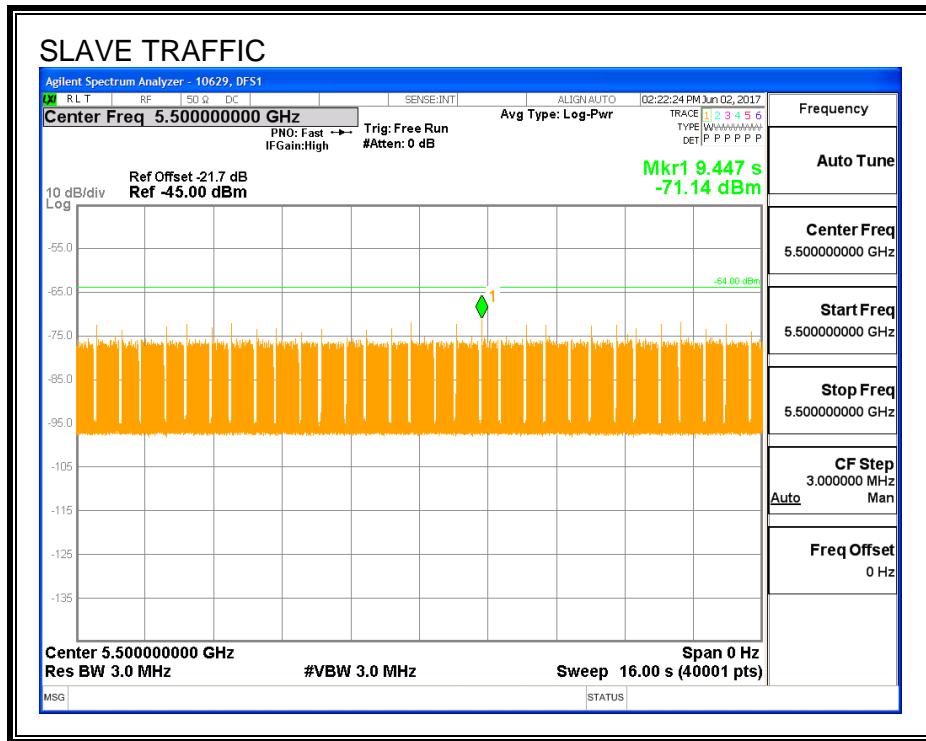

## CHANNEL LOADING

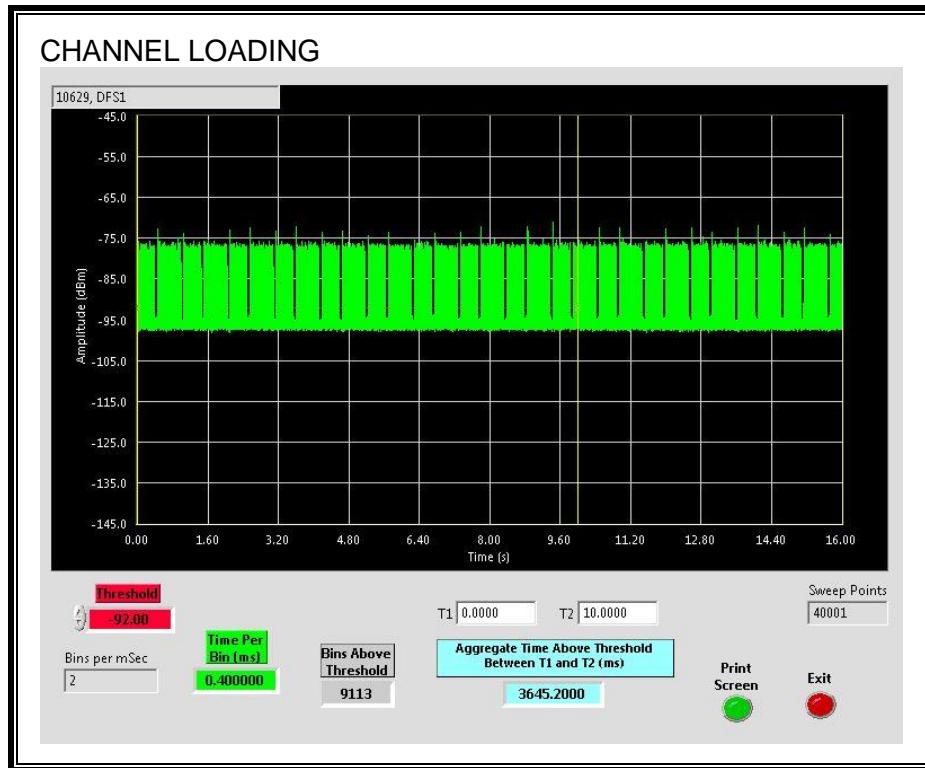

The level of traffic loading on the channel by the EUT is 36.452%

### 11.8.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.8.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.143	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

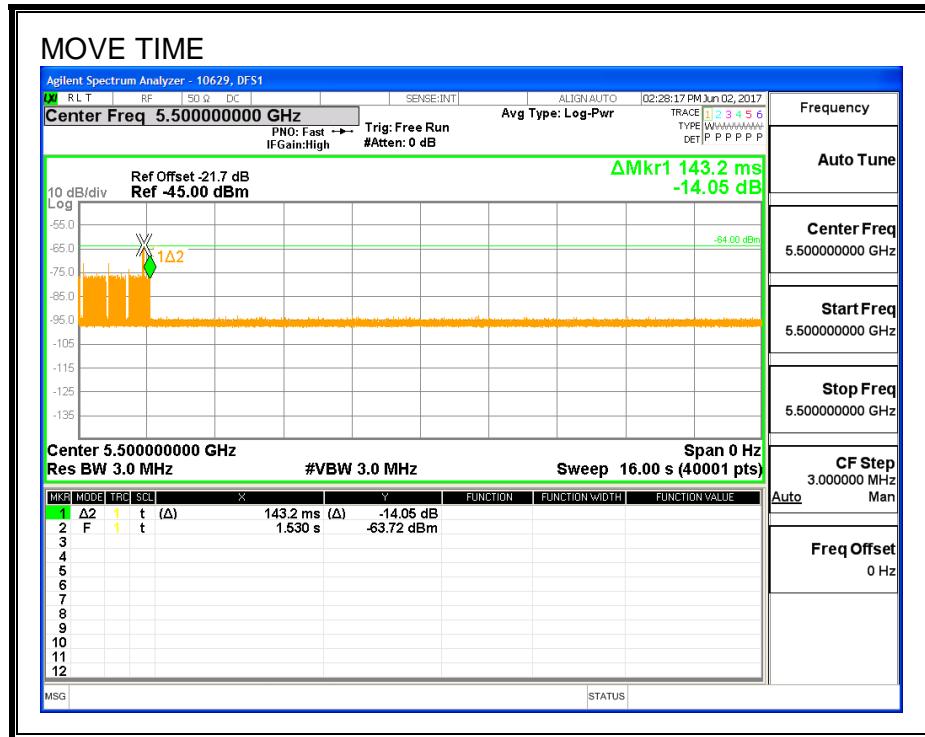


## **CHANNEL CLOSING TIME**

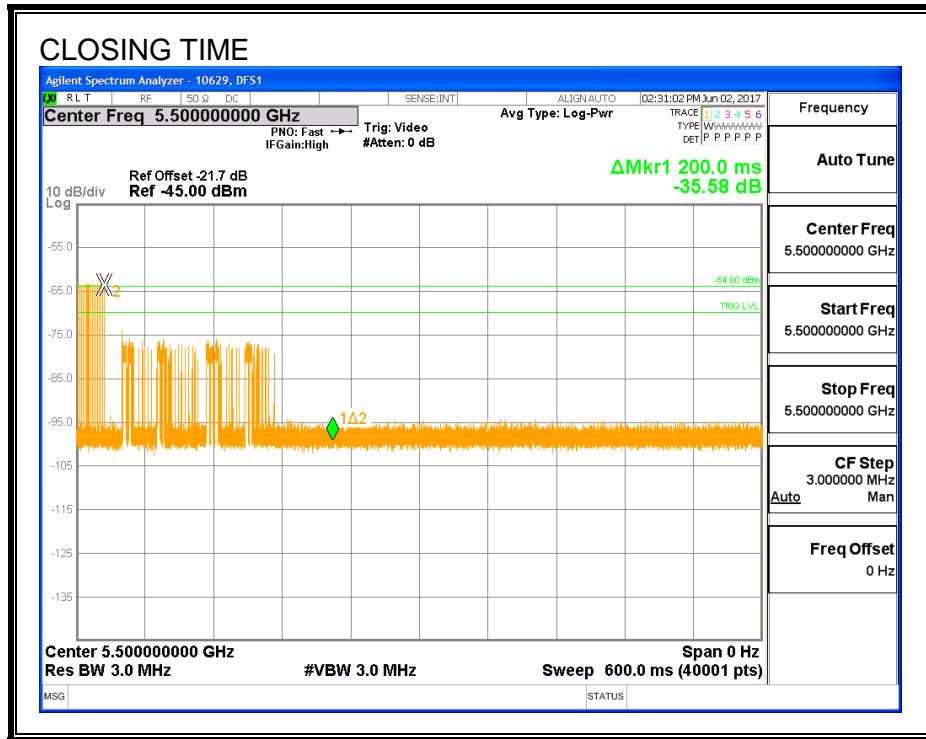

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

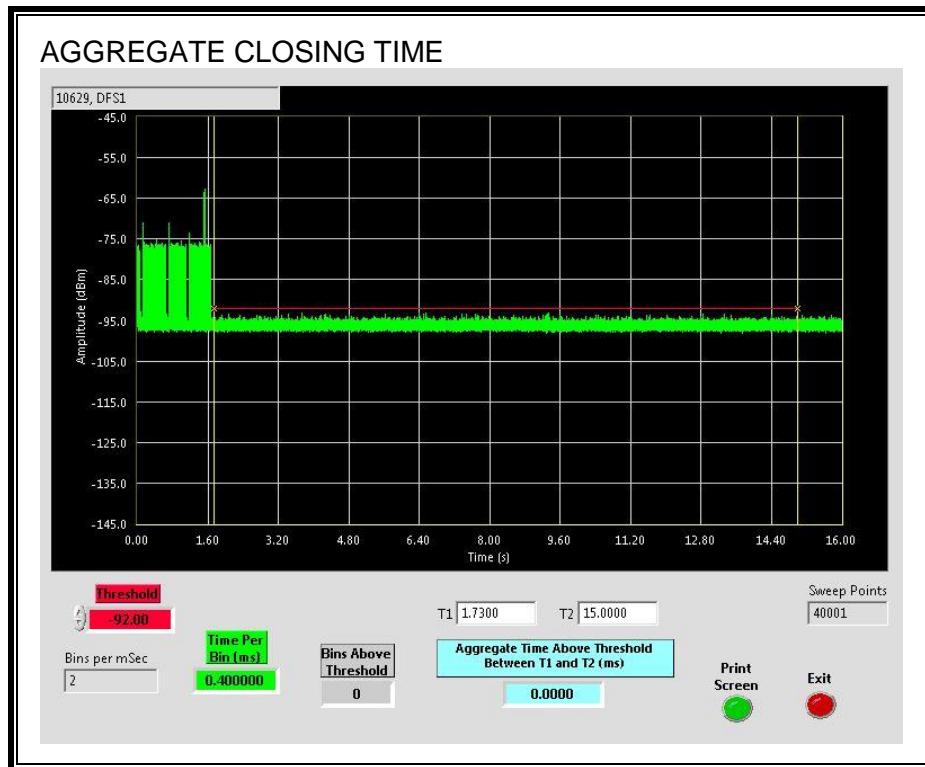


## 11.9. PEER TO PEER MODE EUT RESULTS FOR 40 MHz BANDWIDTH

### 11.9.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

### 11.9.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

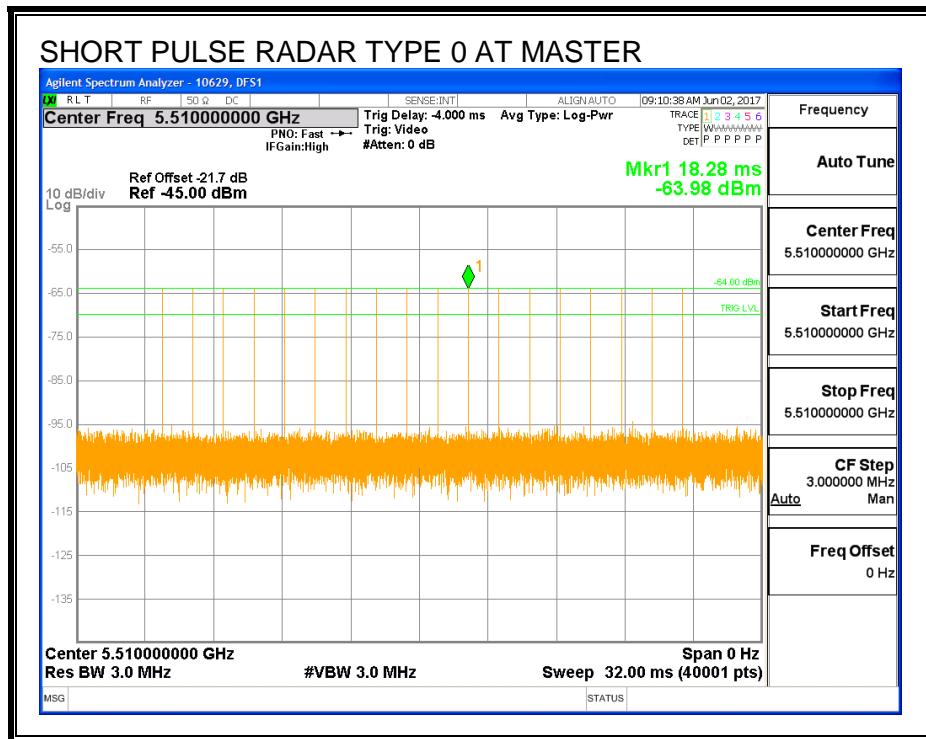

## TRAFFIC

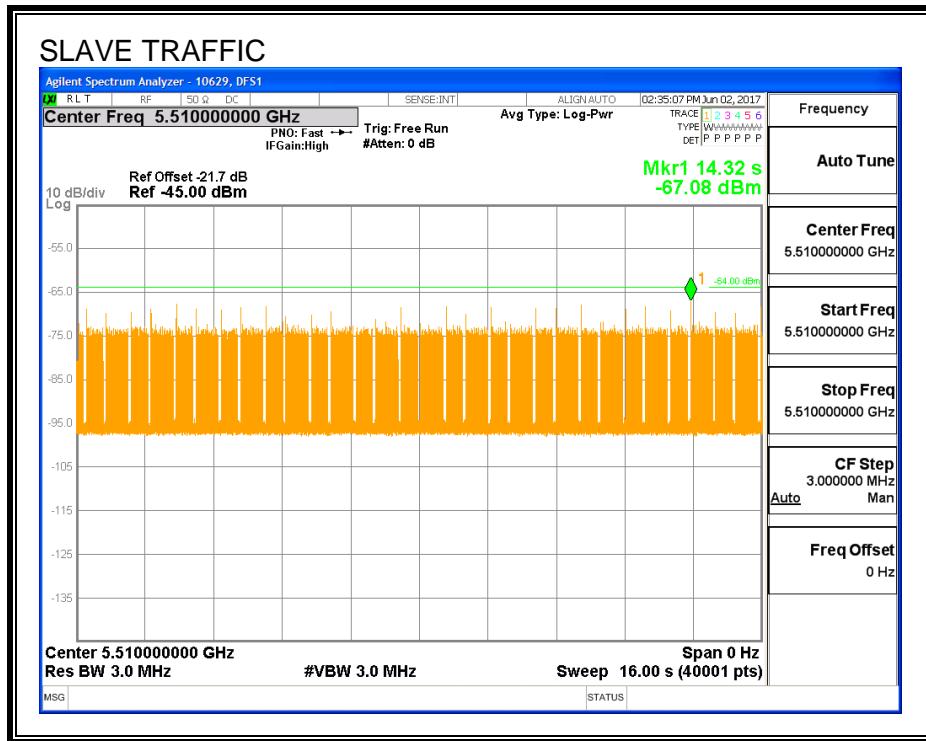

## CHANNEL LOADING

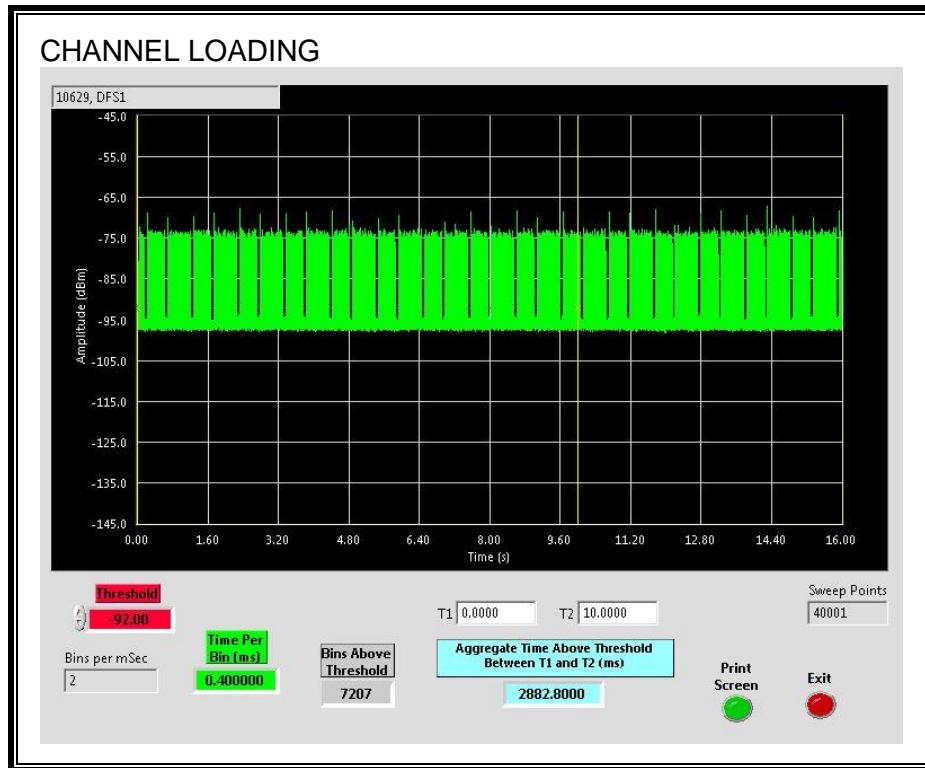

The level of traffic loading on the channel by the EUT is 28.828%

### 11.9.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.9.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.103	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

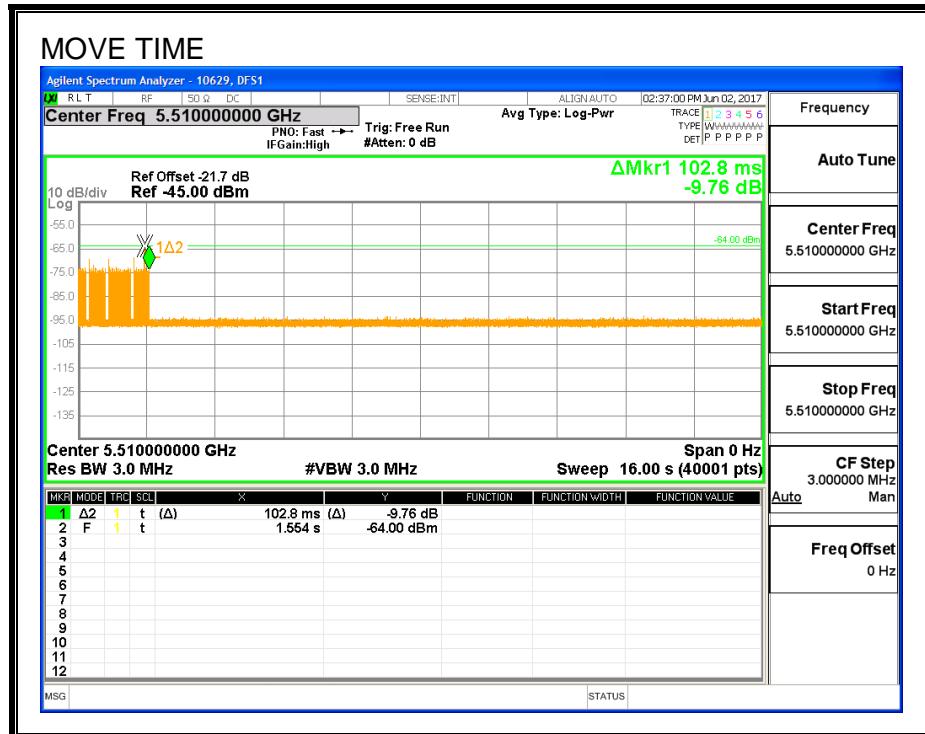


**CHANNEL CLOSING TIME**

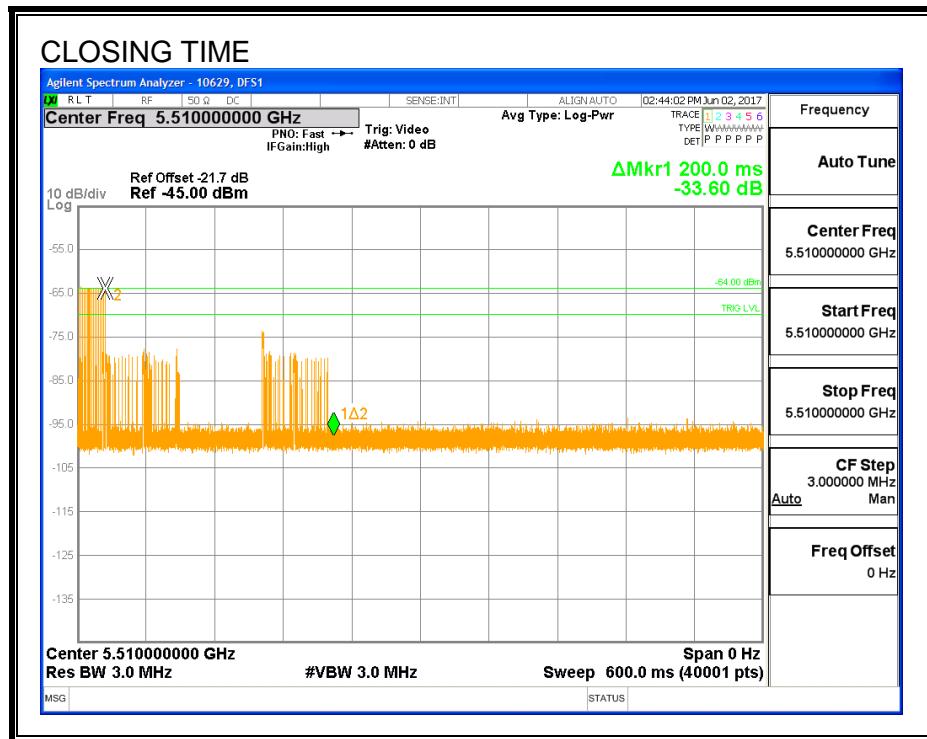

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

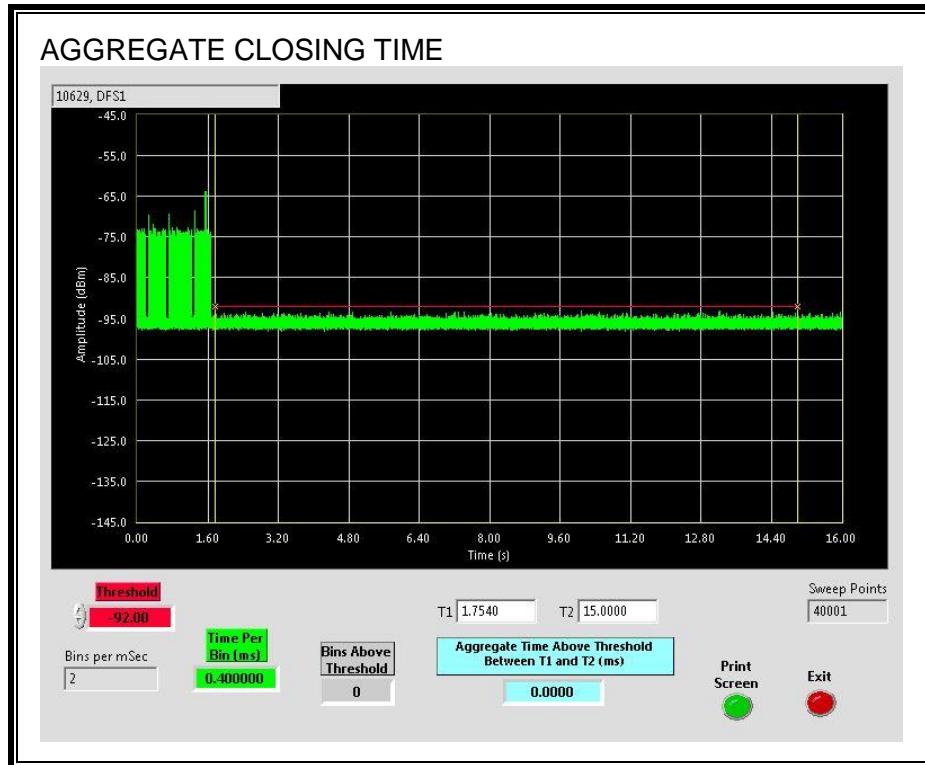


## 11.10. PEER TO PEER MODE EUT RESULTS FOR 80 MHz BANDWIDTH

### 11.10.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

### 11.10.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

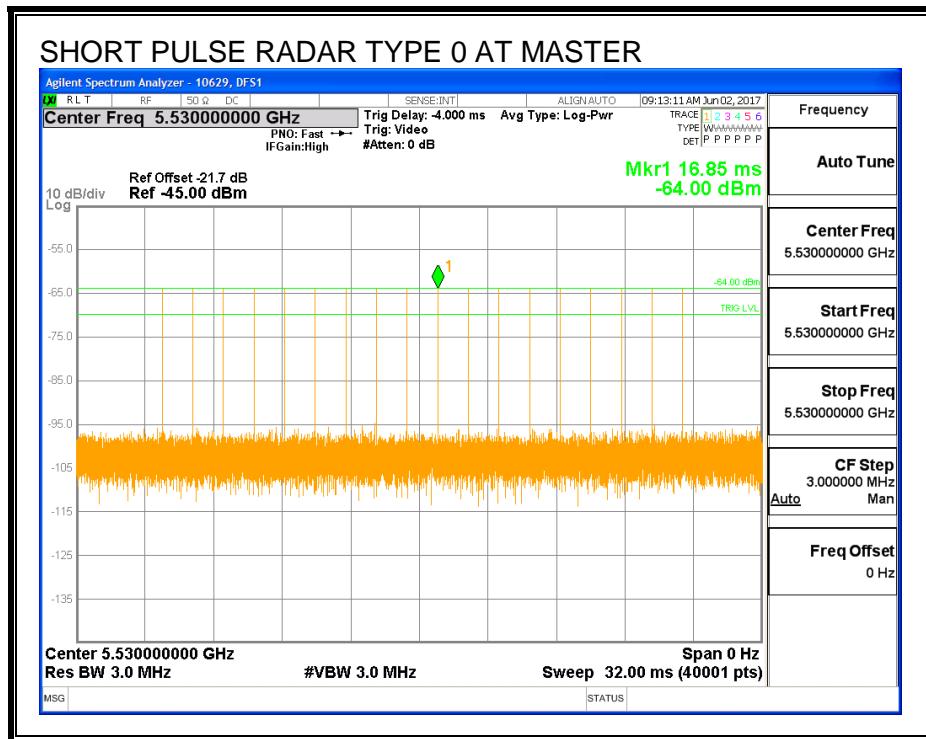

## **TRAFFIC**

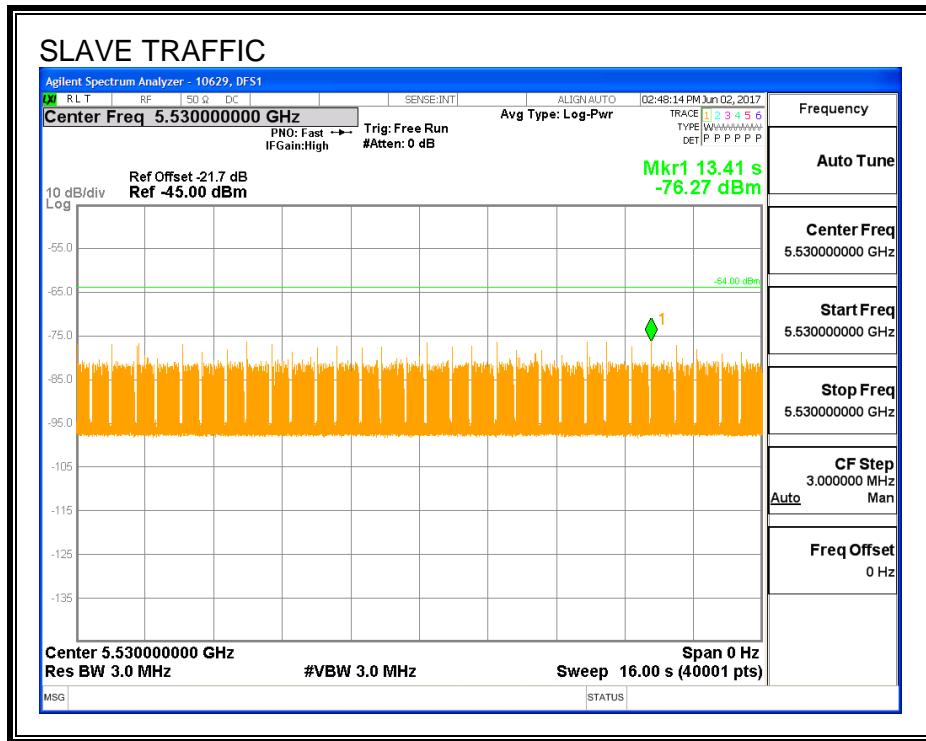

## CHANNEL LOADING

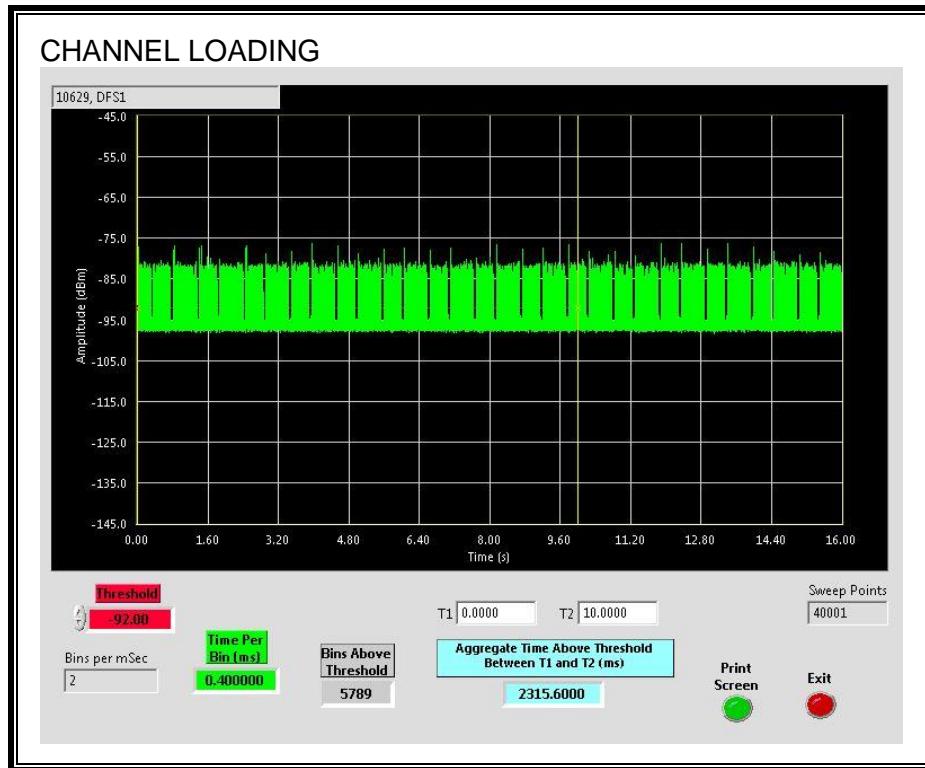

The level of traffic loading on the channel by the EUT is 23.156%

### 11.10.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.10.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.143	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

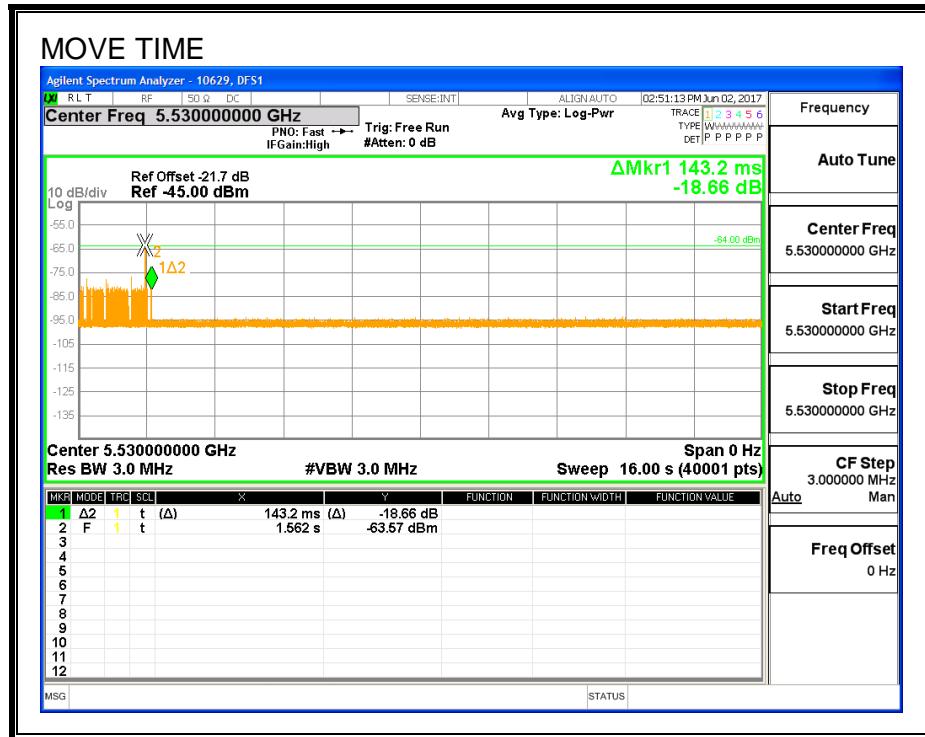


**CHANNEL CLOSING TIME**

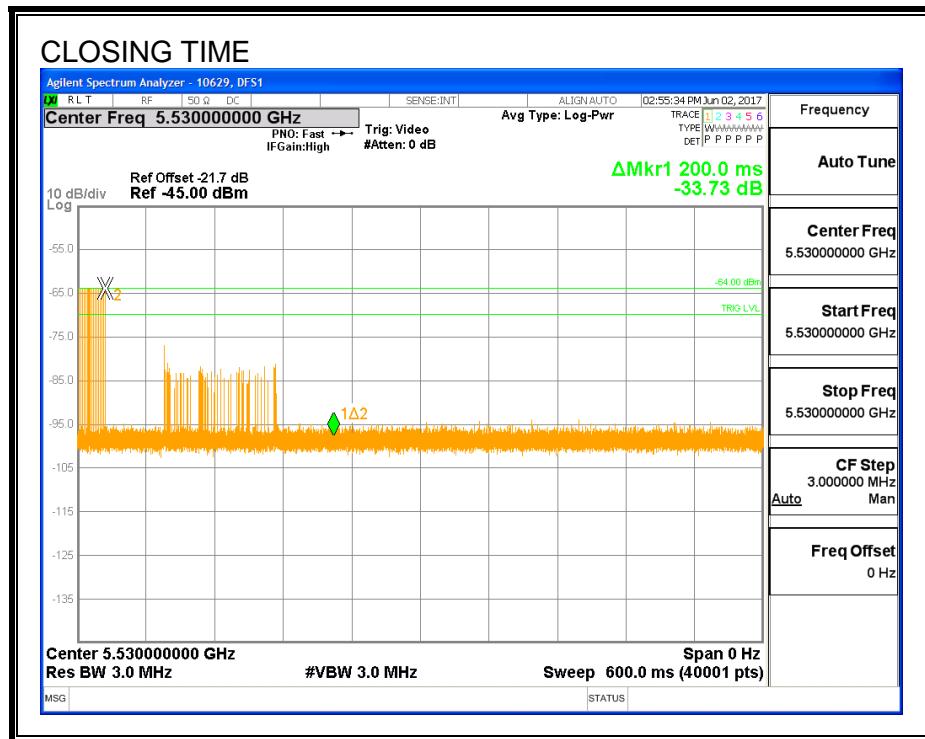

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

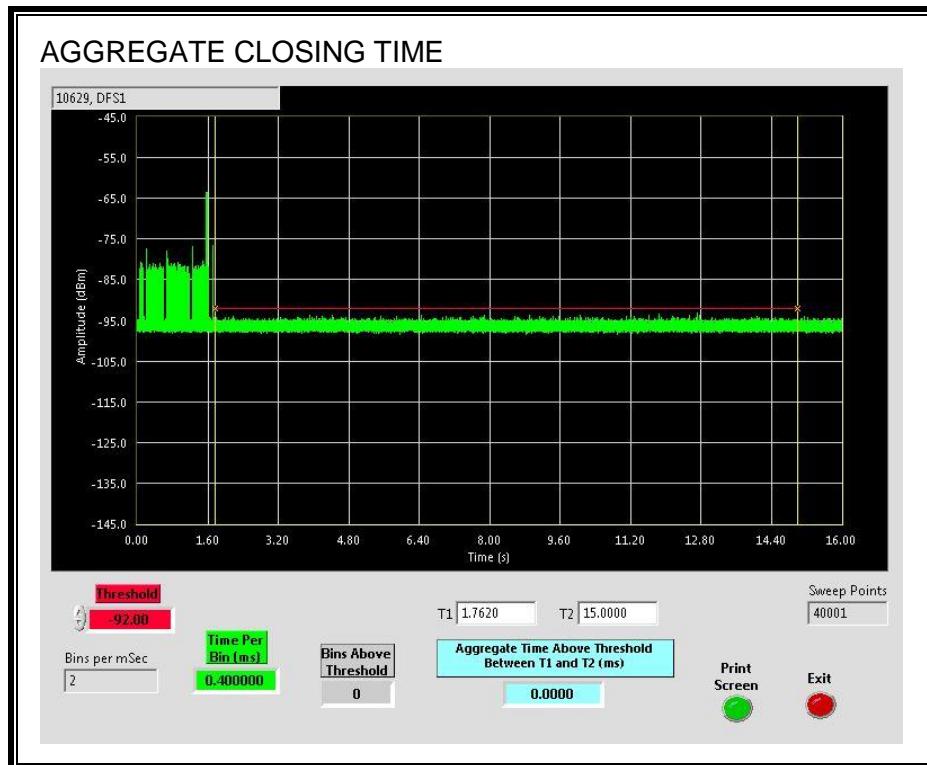

### 11.10.5. 30-MINUTE NON-OCCUPANCY PERIOD

## **RESULTS**

No EUT transmissions were observed on the test channel during the 30-minute observation time.

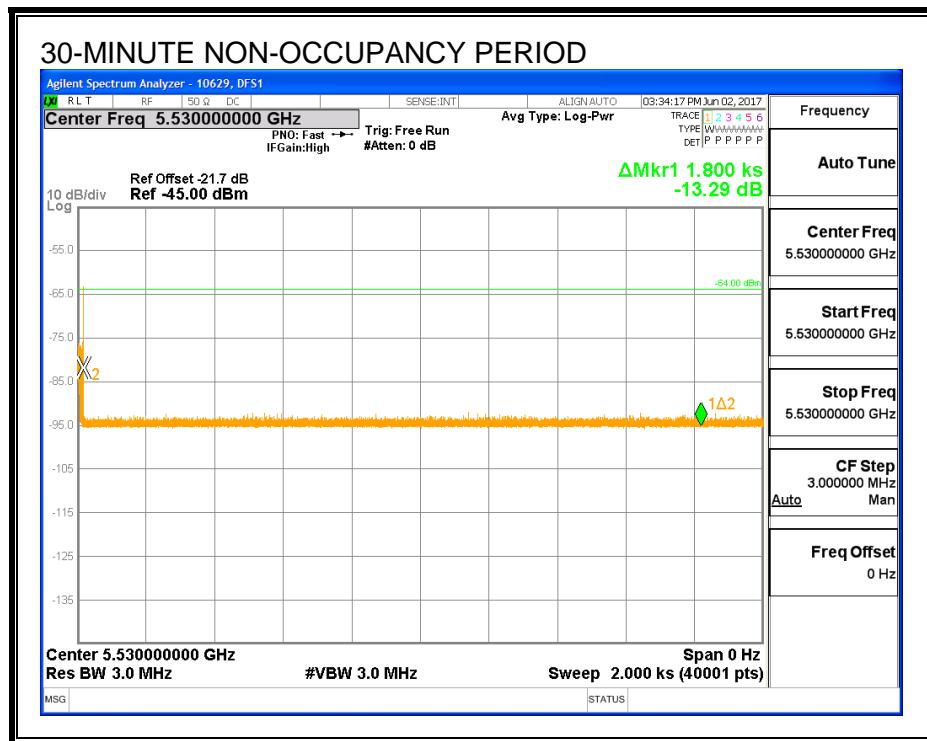


## 11.11. PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 20 MHz BANDWIDTH

### 11.11.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

### 11.11.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

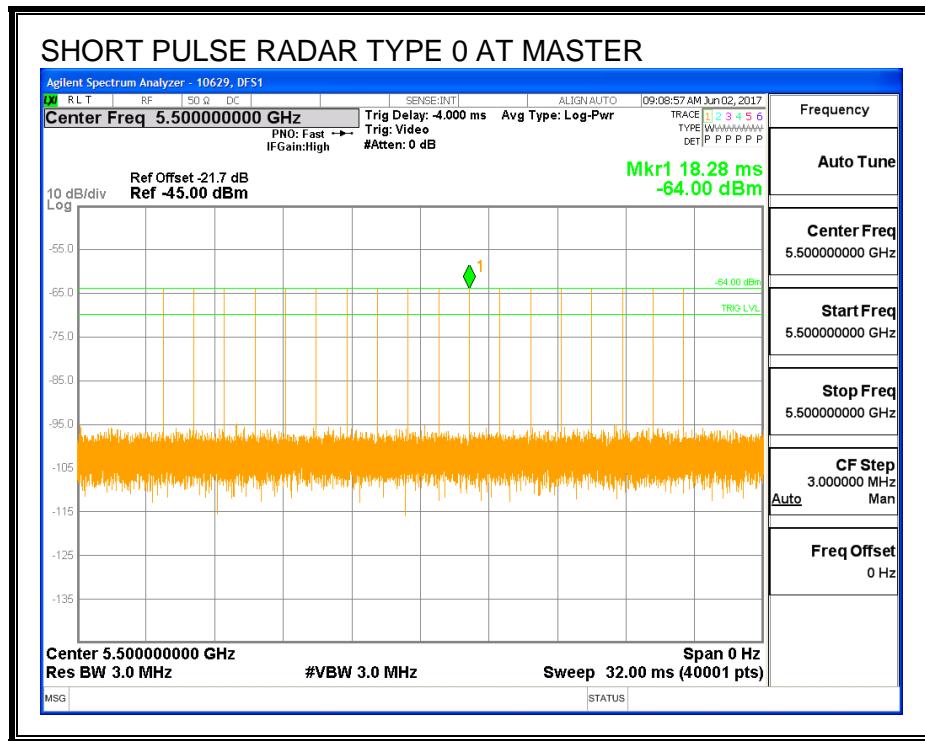

## **TRAFFIC**

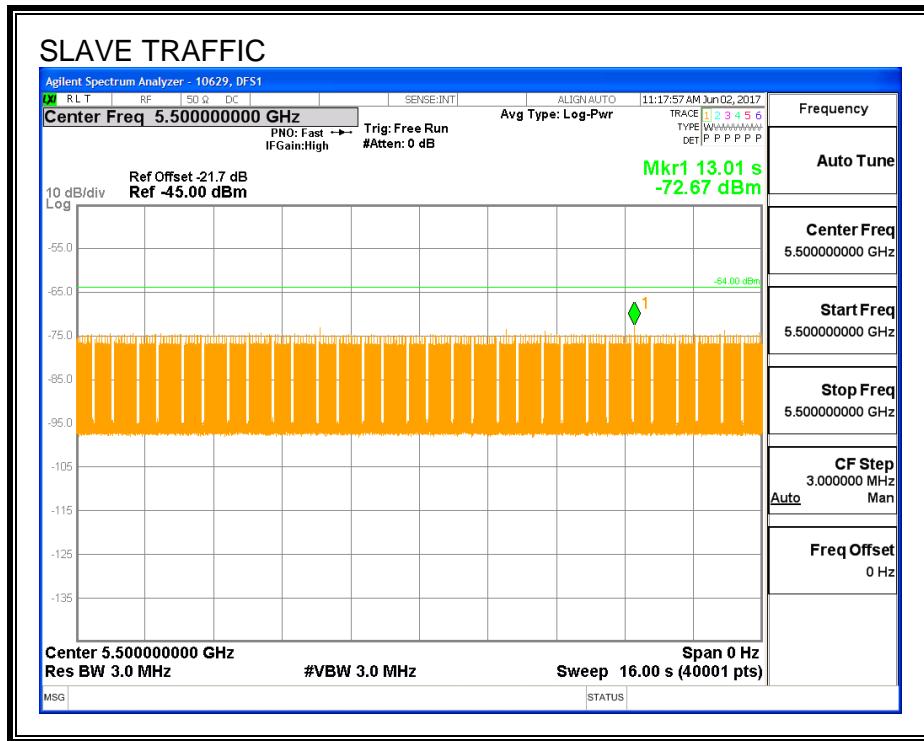

## CHANNEL LOADING

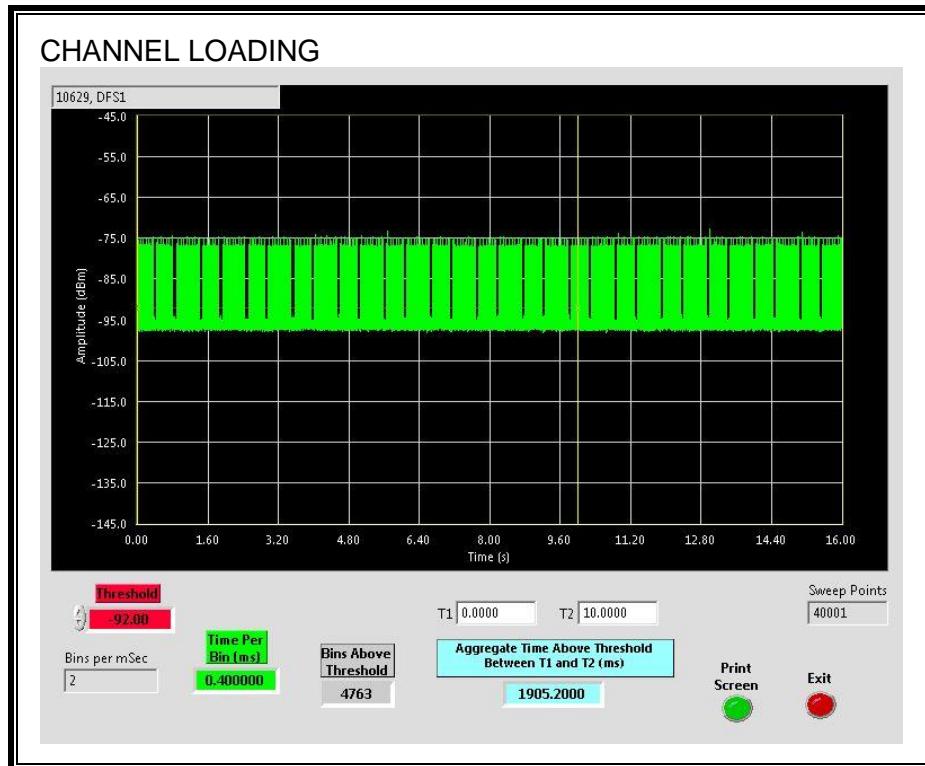

The level of traffic loading on the channel by the EUT is 19.052%

### 11.11.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.11.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.111	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

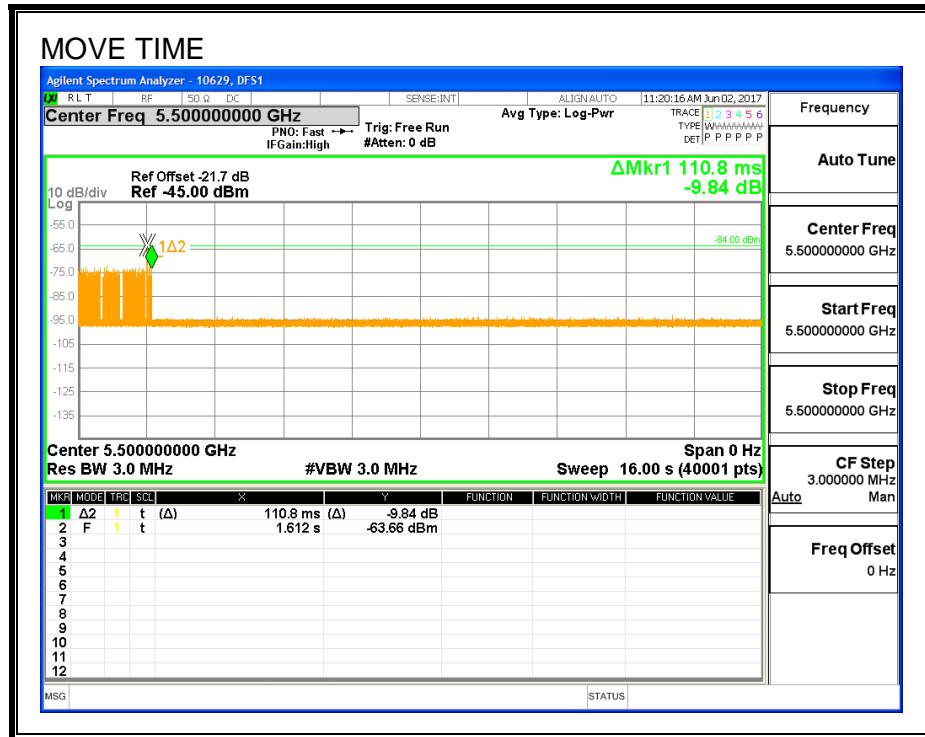


**CHANNEL CLOSING TIME**

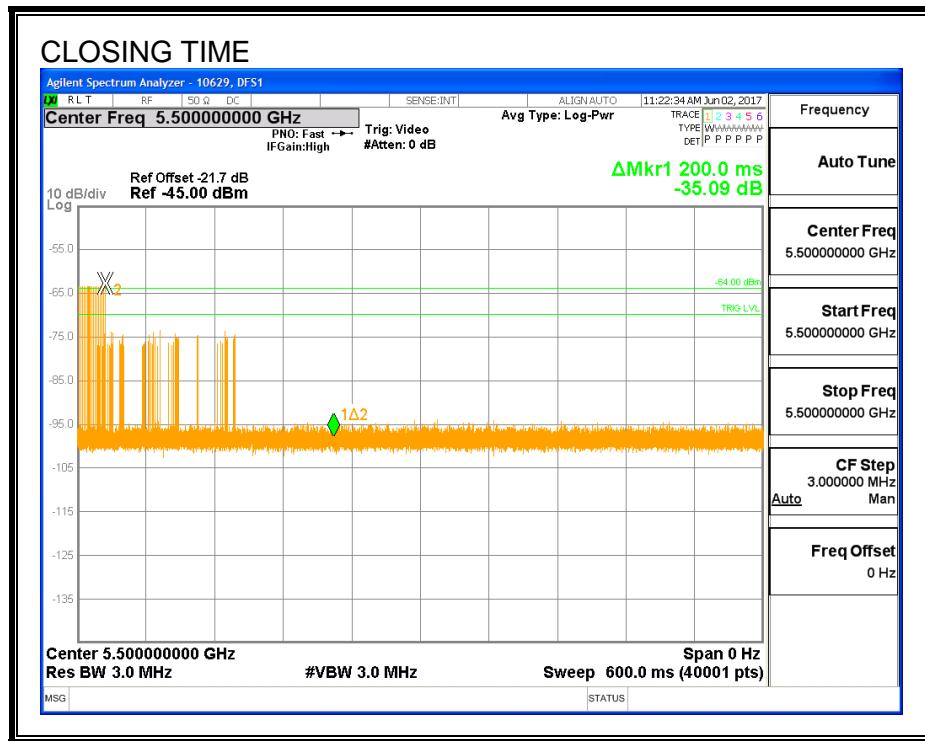

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

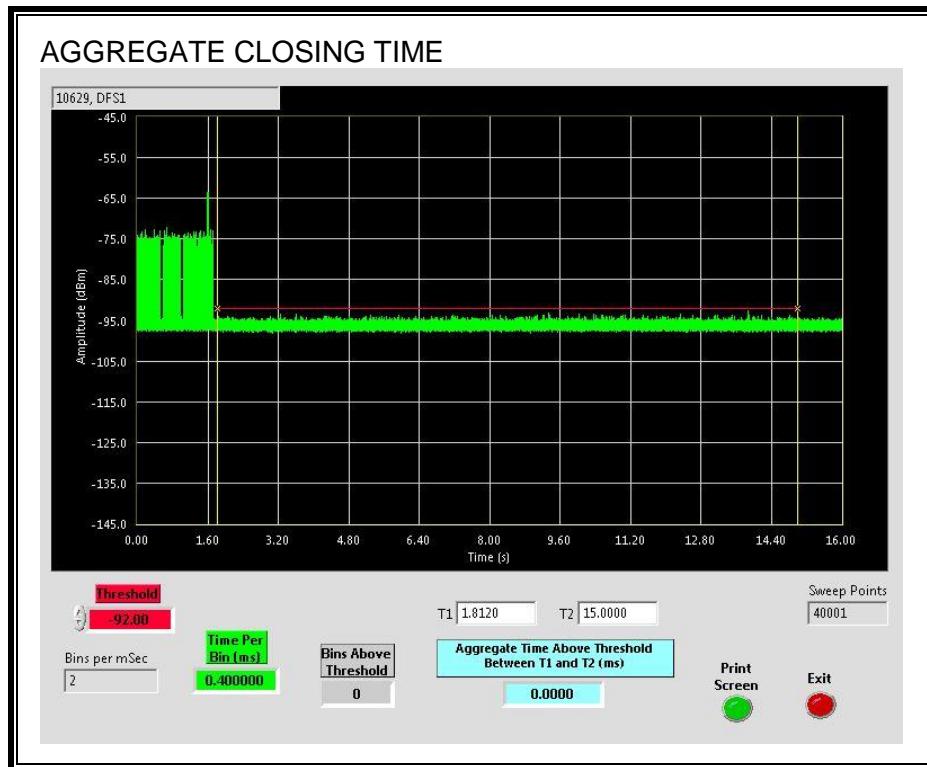


## 11.12. PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 40 MHz BANDWIDTH

### 11.12.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

### 11.12.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

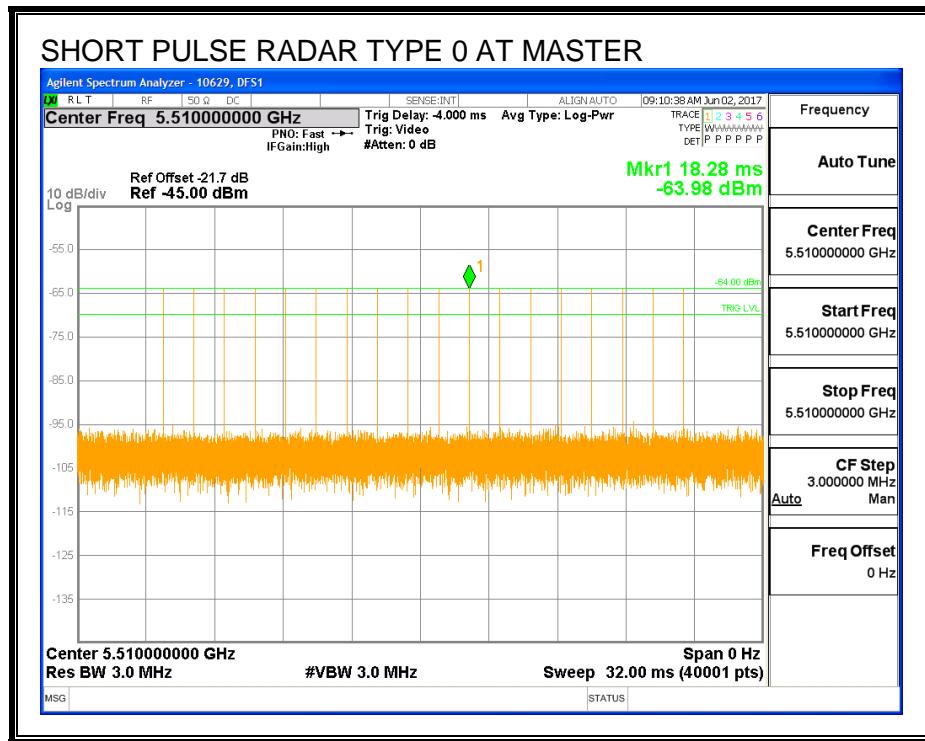

## TRAFFIC

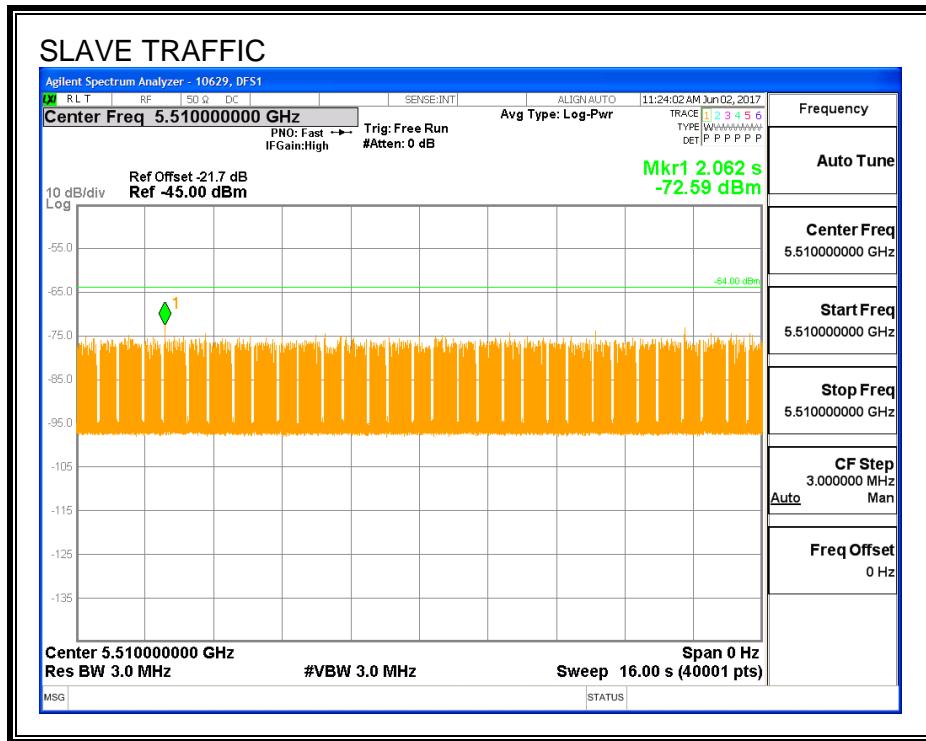

## CHANNEL LOADING

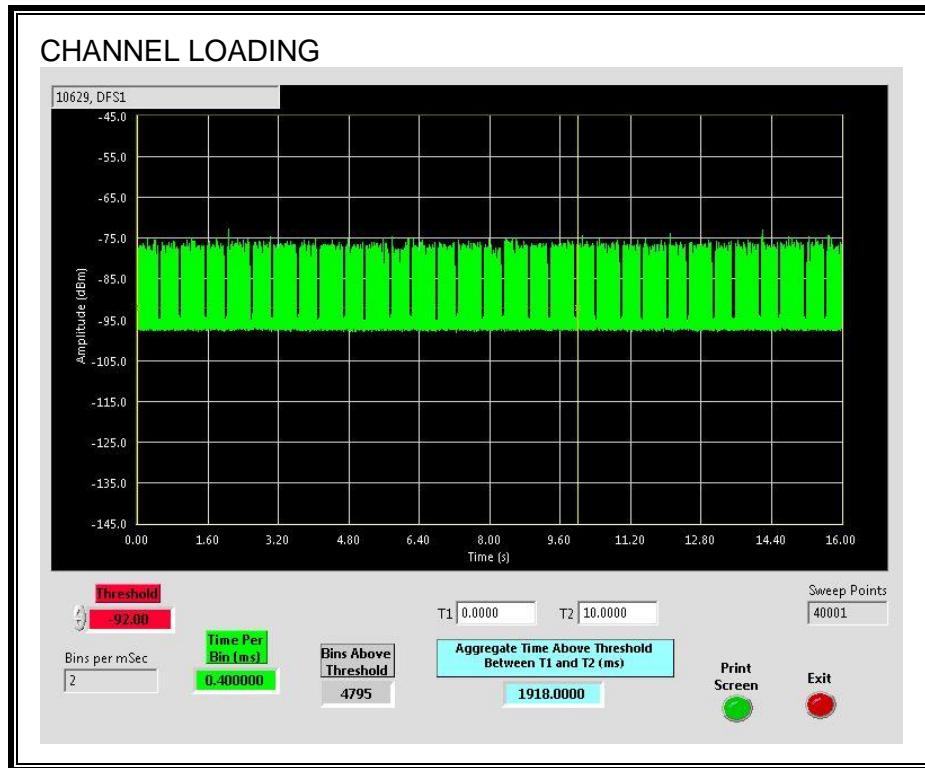

The level of traffic loading on the channel by the EUT is 19.18%

### 11.12.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.12.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.146	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

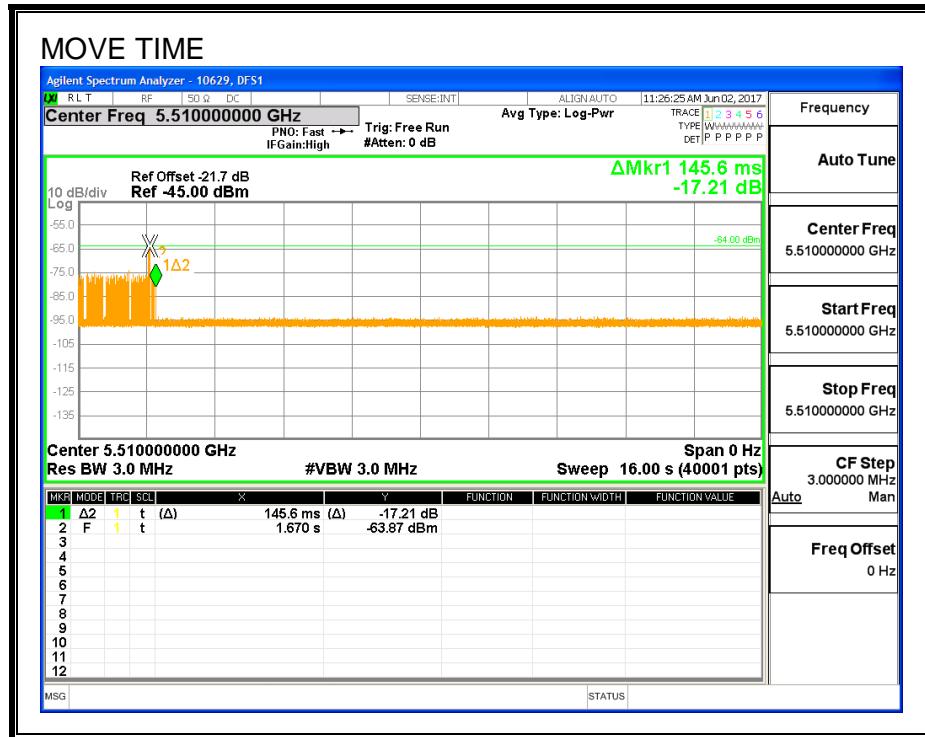


## **CHANNEL CLOSING TIME**

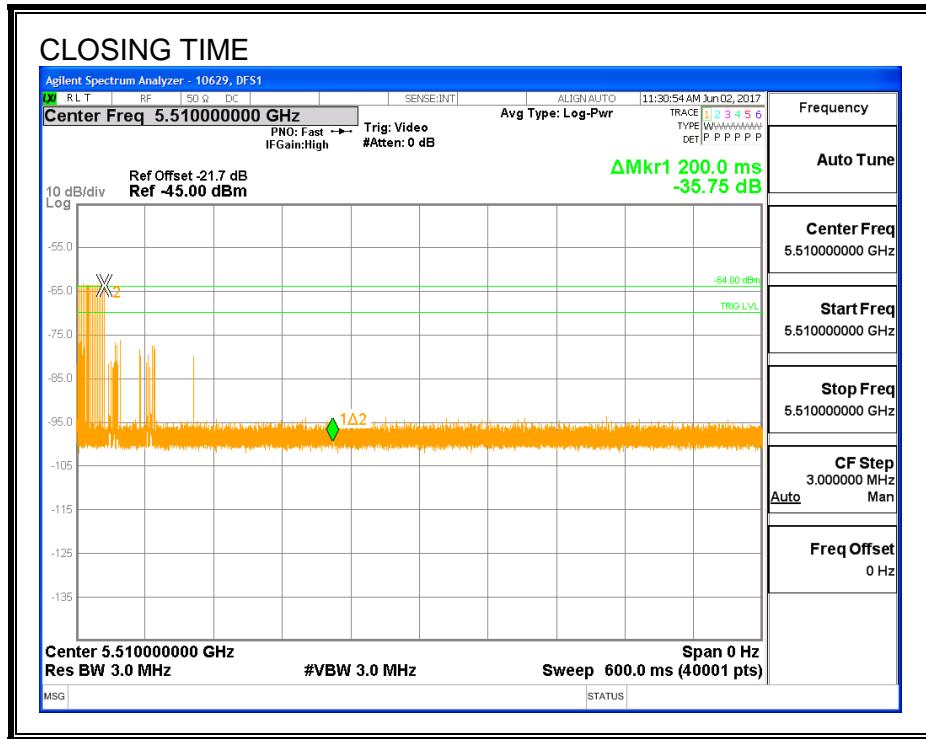

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

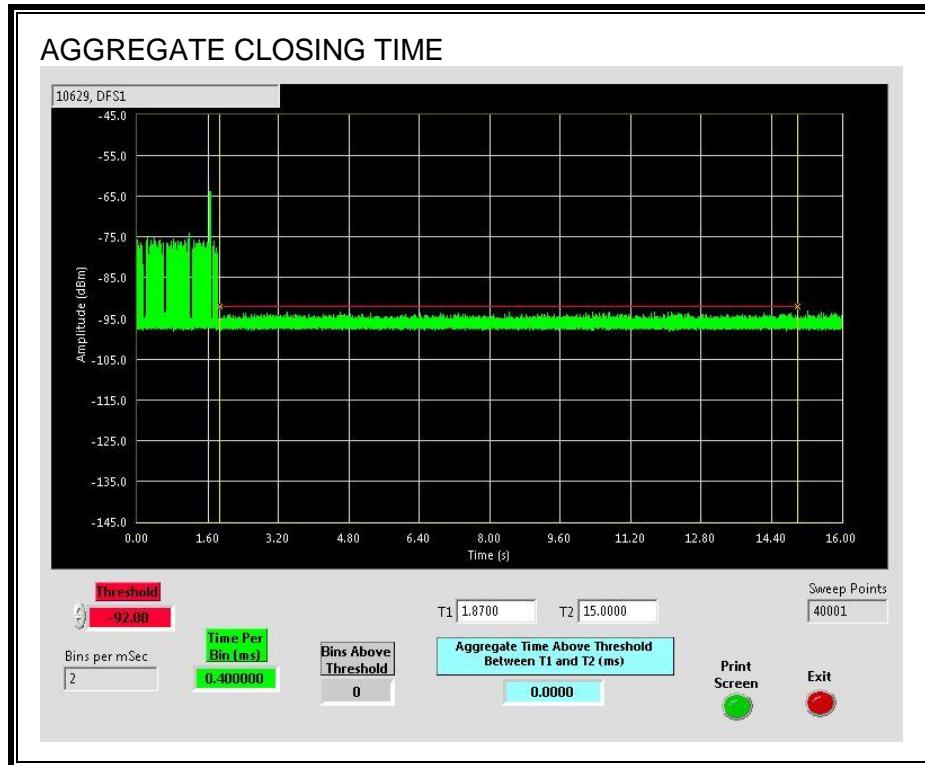


## 11.13. PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 80 MHz BANDWIDTH

### 11.13.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

### 11.13.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

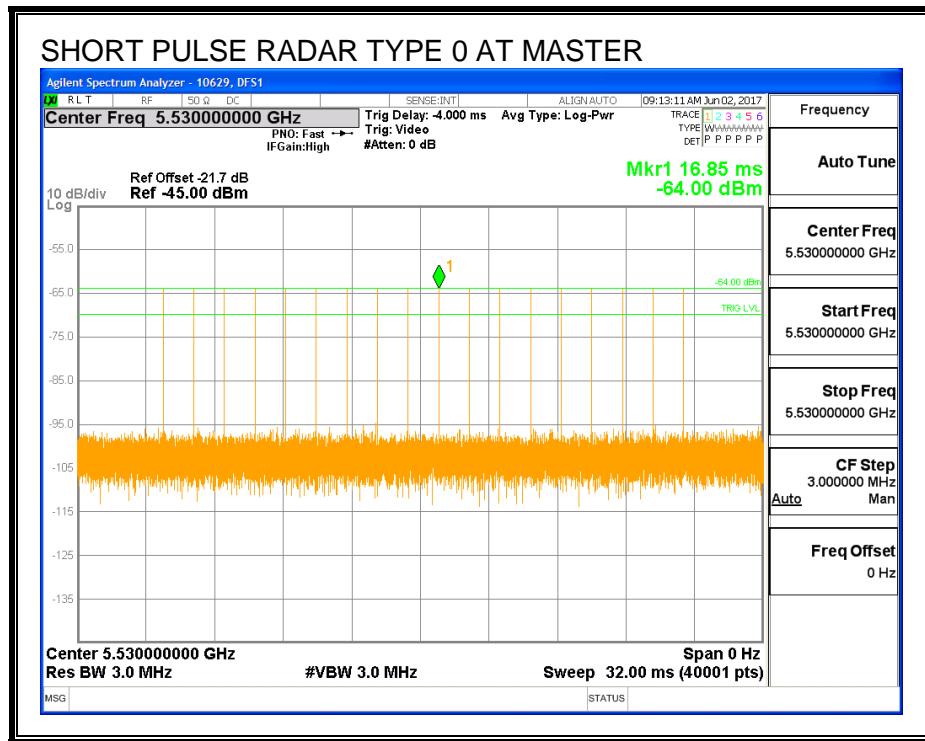

## TRAFFIC

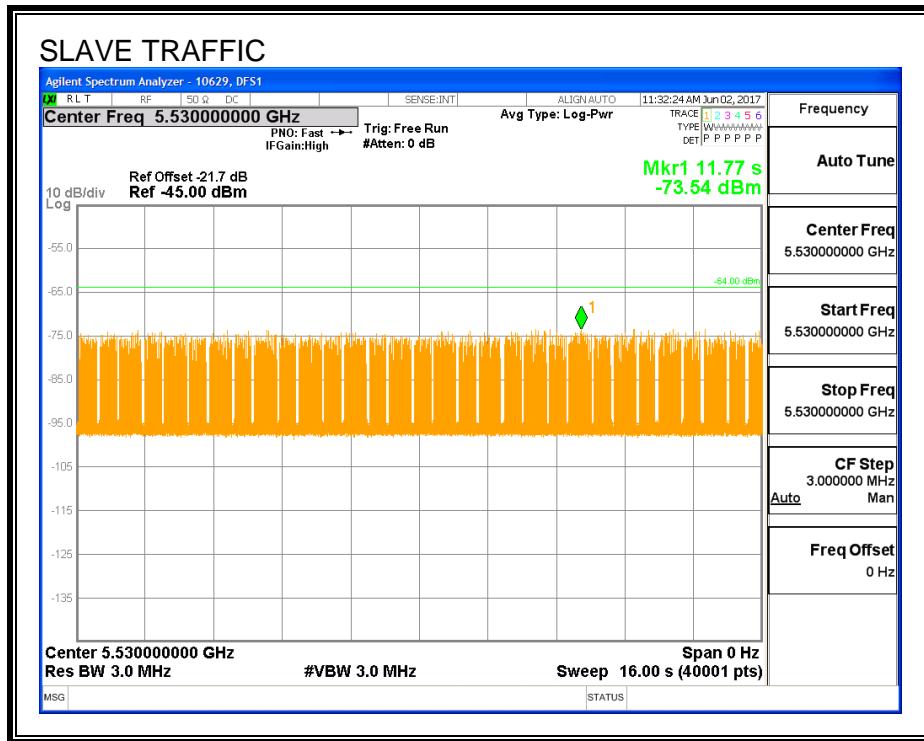

## CHANNEL LOADING

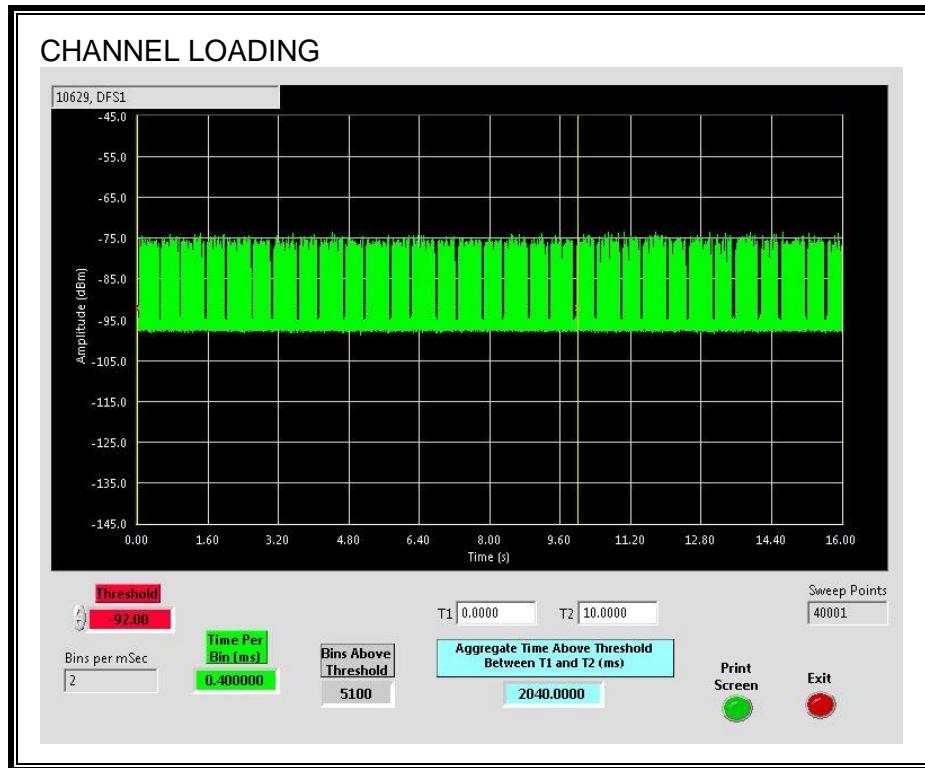

The level of traffic loading on the channel by the EUT is 20.40%

### 11.13.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 11.13.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.052	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

**MOVE TIME**

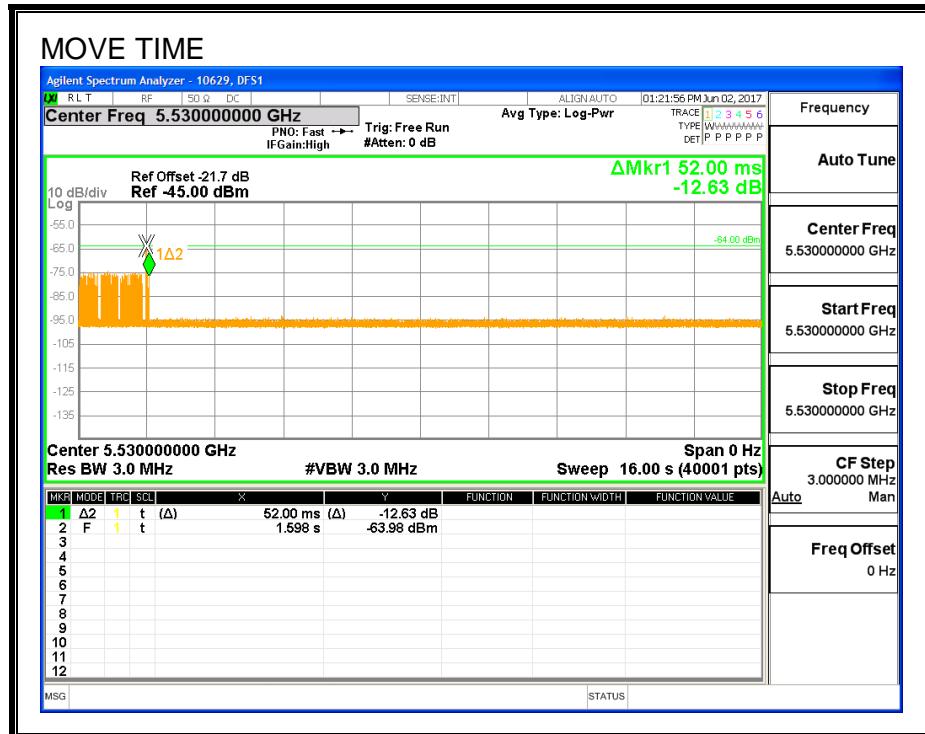


## **CHANNEL CLOSING TIME**

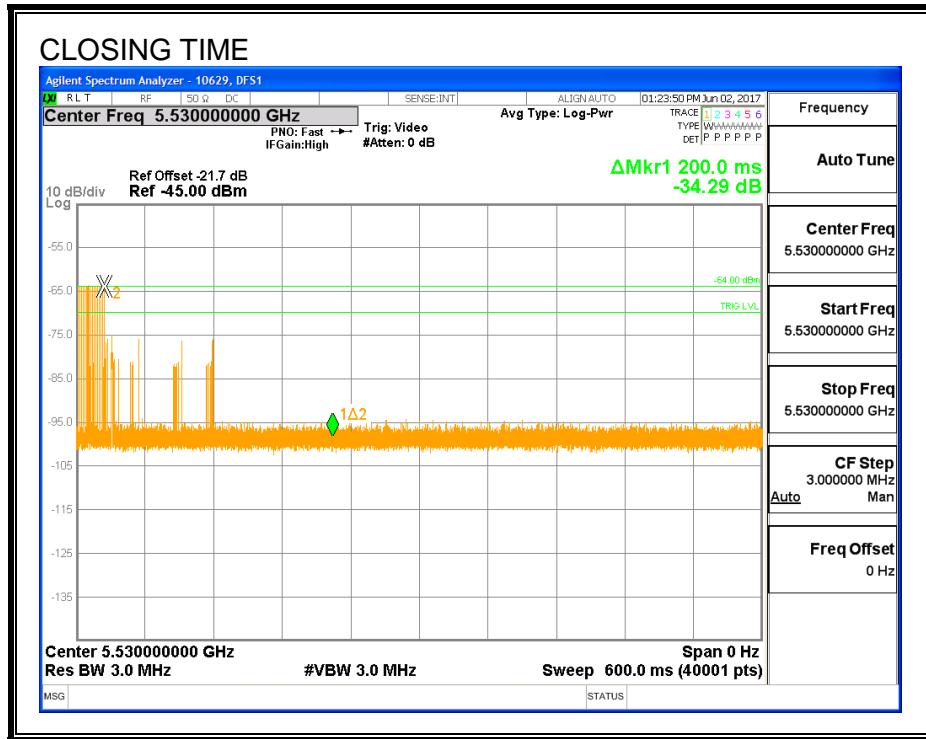

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

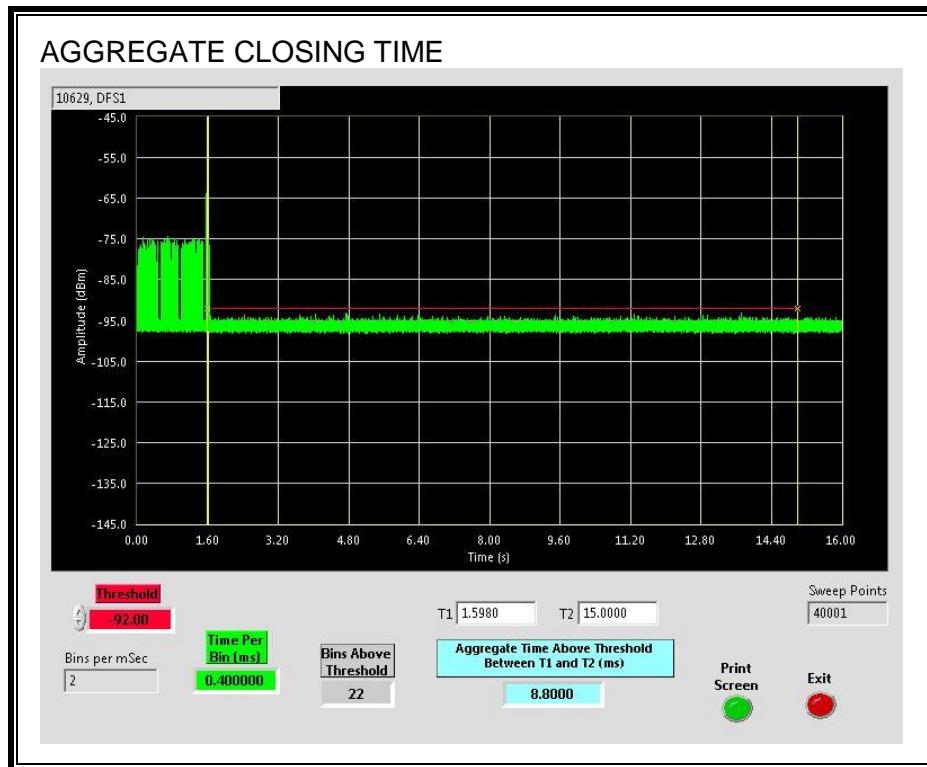

### 11.13.5.30-MINUTE NON-OCCUPANCY PERIOD

#### RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

