



CERTIFICATION TEST REPORT

Report Number. : 11792476-E10V2

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1902

FCC ID : BCG-E3176A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 27

Date Of Issue:
August 22, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08/17/2017	Initial Review	--
V2	08/22/2017	Updated report to address TCB's questions	Tina Chu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.2.1. LAT 1.....	8
5.2.2. UAT 1	10
5.3. SOFTWARE AND FIRMWARE.....	12
5.4. MAXIMUM ANTENNA GAIN.....	12
5.5. WORST-CASE CONFIGURATION AND MODE	12
5.6. DESCRIPTION OF TEST SETUP.....	13
6. TEST AND MEASUREMENT EQUIPMENT	15
7. TRANSMITTER OUTPUT POWER (CONDUCTED AND EIRP).....	16
7.1. LAT 1.....	17
7.1.1. LTE BAND 7	17
7.1.2. LTE BAND 41	21
7.2. UAT 1	26
7.2.1. LTE BAND 7	26
7.2.2. LTE BAND 41	30
8. CONDUCTED TEST RESULTS	35
8.1. OCCUPIED BANDWIDTH	35
8.1.1. LTE BAND 7	38
8.1.2. LTE BAND 41	47
8.2. EMISSION MASK	59
8.2.1. LTE BAND 7	61
8.2.2. LTE BAND 41	69

8.3.	OUT OF BAND EMISSIONS.....	77
8.3.1.	LTE BAND 7	78
8.3.2.	LTE BAND 41	84
9.	FREQUENCY STABILITY	90
9.1.	LTE BAND 7	91
9.2.	LTE BAND 41	92
10.	PEAK-TO-AVERAGE RATIO	93
10.1.1.	LTE BAND 7.....	93
10.1.2.	LTE BAND 41.....	94
11.	RADIATED TEST RESULTS	95
11.1.	FIELD STRENGTH OF SPURIOUS RADIATION, LAT 1	95
11.1.1.	LTE BAND 7.....	97
11.1.2.	LTE BAND 41.....	101
11.2.	FIELD STRENGTH OF SPURIOUS RADIATION, UAT 1.....	105
11.2.1.	LTE BAND 7.....	105
11.2.2.	LTE BAND 41.....	109
12.	SETUP PHOTOS	113

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A1902

SERIAL NUMBER: C39TX026J954


DATE TESTED: MAY 17, 2017 – JUNE 25, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC CFR47 PART 27	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



MENGISTU MEKURIA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:



TINA CHU
TEST ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, FCC CFR 47 Part 2, FCC KDB 971168 D01 v02r02, KDB 971168 D01 D02 v01, Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:22541-2)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)
	☐ Chamber G (IC:22541-4)
	☐ Chamber H (IC:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Equipment under Test is a mobile phone with GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA and CDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations EIRP output powers as follows:

5.2.1. LAT 1

OUTPUT POWER FOR LTE BAND 7

Part 27 / RSS199 LTE Band 7				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
10+20	2500 - 2570	QPSK	22.8	190.5
		16QAM	21.8	151.4
		64QAM	19.9	97.7
20+10		QPSK	22.9	195.0
		16QAM	21.8	151.4
		64QAM	19.9	97.7
15+15		QPSK	22.8	190.5
		16QAM	21.7	147.9
		64QAM	19.9	97.7
15+20		QPSK	22.8	190.5
		16QAM	21.9	154.9
		64QAM	19.9	97.7
20+15		QPSK	22.8	190.5
		16QAM	21.7	147.9
		64QAM	19.9	97.7
20+20		QPSK	22.9	195.0
		16QAM	21.7	147.9
		64QAM	19.9	97.7

OUTPUT POWER FOR LTE BAND 41

Part 27 / RSS199 LTE Band 41				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
5+20	2496-2690	QPSK	22.9	195.0
		16QAM	21.9	154.9
		64QAM	19.9	97.7
20+5		QPSK	22.8	190.5
		16QAM	21.7	147.9
		64QAM	19.8	95.5
10+20		QPSK	22.9	195.0
		16QAM	21.9	154.9
		64QAM	19.9	97.7
20+10		QPSK	22.8	190.5
		16QAM	21.8	151.4
		64QAM	19.9	97.7
15+15		QPSK	22.9	195.0
		16QAM	21.8	151.4
		64QAM	19.9	97.7
15+20		QPSK	22.7	186.2
		16QAM	21.9	154.9
		64QAM	19.9	97.7
20+15		QPSK	22.9	195.0
		16QAM	21.8	151.4
		64QAM	19.9	97.7
20+20		QPSK	22.9	195.0
		16QAM	21.8	151.4
		64QAM	19.9	97.7

5.2.2. UAT 1

OUTPUT POWER FOR LTE BAND 7

Part 27 / RSS199 LTE Band 7				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
10+20	2500 - 2570	QPSK	17.5	56.2
		16QAM	16.3	42.7
		64QAM	14.5	28.2
20+10		QPSK	17.5	56.2
		16QAM	16.5	44.7
		64QAM	14.5	28.2
15+15		QPSK	17.5	56.2
		16QAM	16.4	43.7
		64QAM	14.5	28.2
15+20		QPSK	17.4	55.0
		16QAM	16.2	41.7
		64QAM	14.5	28.2
20+15		QPSK	17.4	55.0
		16QAM	16.4	43.7
		64QAM	14.5	28.2
20+20		QPSK	17.5	56.2
		16QAM	16.4	43.7
		64QAM	14.5	28.2

OUTPUT POWER FOR LTE BAND 41

Part 27 / RSS199 LTE Band 41				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	EIRP (Average)	
			dBm	mW
5+20	2496-2690	QPSK	16.9	49.0
		16QAM	16.0	39.8
		64QAM	14.0	25.1
20+5		QPSK	17.0	50.1
		16QAM	15.9	38.9
		64QAM	14.0	25.1
10+20		QPSK	16.9	49.0
		16QAM	16.0	39.8
		64QAM	14.0	25.1
20+10		QPSK	17.0	50.1
		16QAM	16.0	39.8
		64QAM	14.0	25.1
15+15		QPSK	17.0	50.1
		16QAM	15.9	38.9
		64QAM	14.0	25.1
15+20		QPSK	17.0	50.1
		16QAM	16.0	39.8
		64QAM	14.0	25.1
20+15		QPSK	16.9	49.0
		16QAM	15.9	38.9
		64QAM	14.0	25.1
20+20		QPSK	17.0	50.1
		16QAM	16.0	39.8
		64QAM	14.0	25.1

5.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 00.34.01.

5.4. MAXIMUM ANTENNA GAIN

Please see table below:

LTE BANDS	LAT 1 Antenna Gain (dBi)	UAT 1 Antenna Gain (dBi)
LTE Band 7, 2500 – 2570 MHz	-0.94	-2.33
LTE Band 41, 2496 – 2690 MHz	-0.94	-2.31

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE dual carrier Bands of: Band 7 and Band 41.

The EUT was investigated in three orthogonal orientations X/Y/Z on both LAT 1 and UAT 1 antennas, it was determined that X (Flatbed) orientation was worst-case orientation for all bands on both antennas without AC/DC adapter, headphones, or laptop.

Radiated spurious emissions were investigated below 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz-1GHz.

Tests were performed on the conducted test at LAT 1 antenna as worst case since it has higher output powers. Only output power and occupied bandwidth were performed on the 64QAM due to power is lower than QPSK/16QAM.

All of the test modes for each test items are the worst case configuration after investigation.

For simultaneous transmission of multiple channels in the 2.4GHz and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC/DC adapter	HP	HNSTNN-DA40	WDWR70BAR9AKS8
Laptop	HP	HP ProBook 450 G2	CND5367Z97


I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US 115V	Un-shielded	2.0m	N/A
2	USB	1	DC	Un-shielded	1.0m	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6m	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2m	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5m	NA

CONDUCTED SETUP

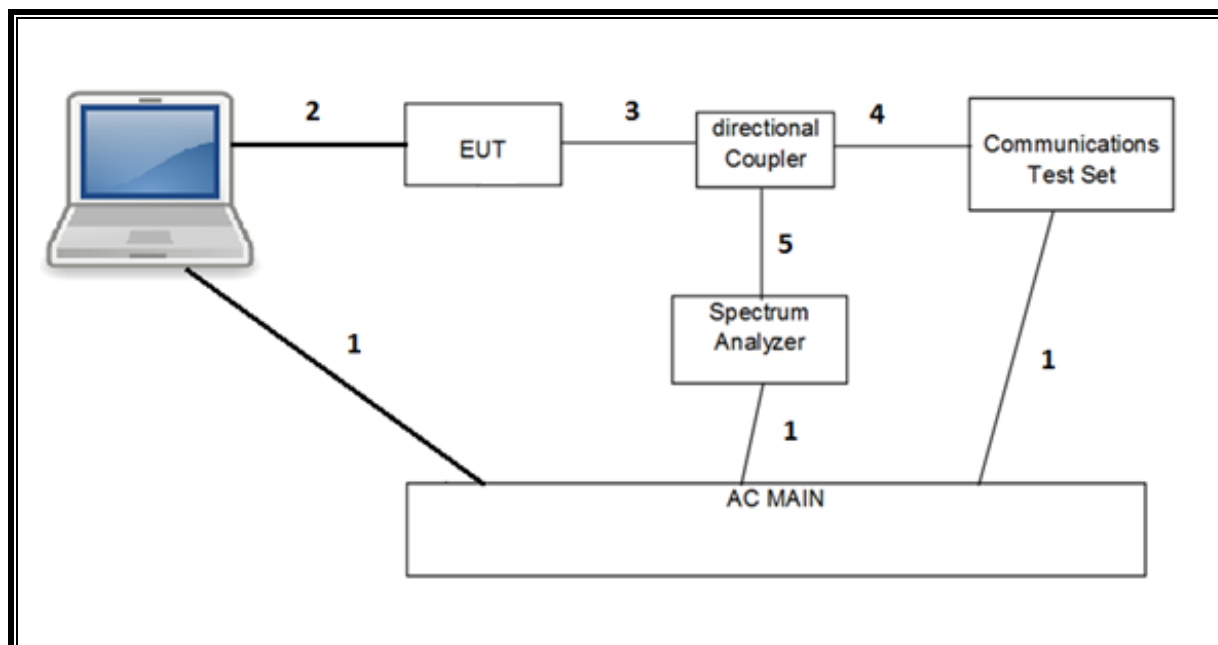

RADIATED SETUP

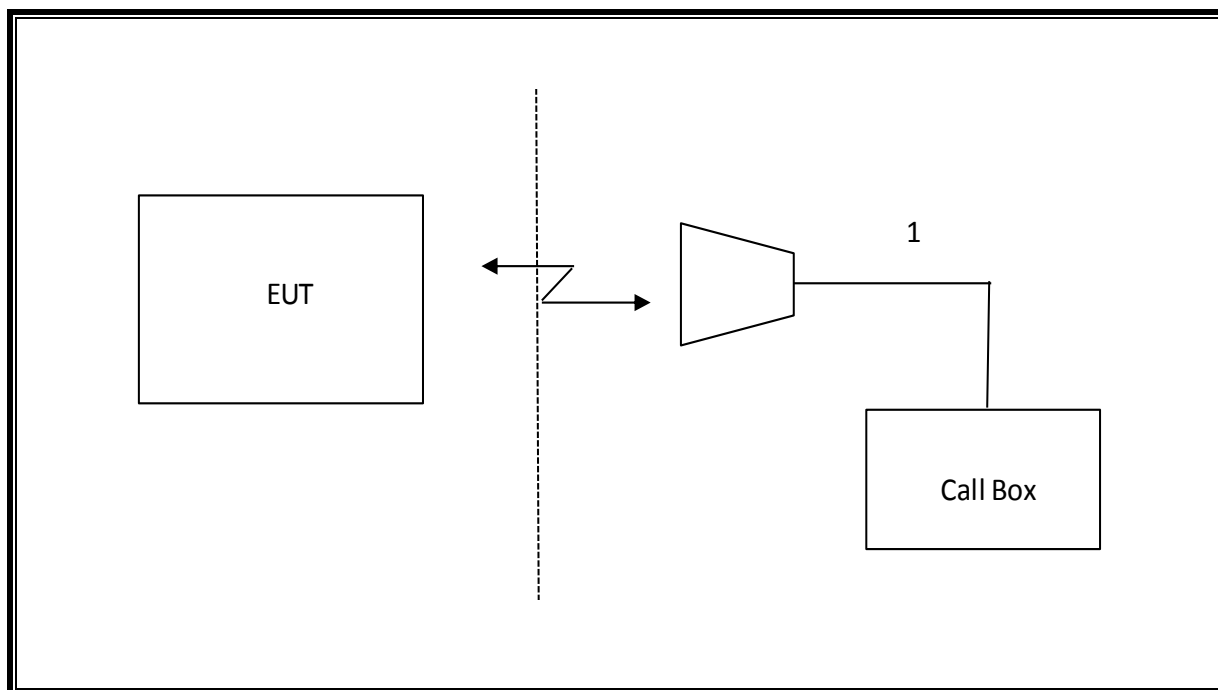

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T863	6/9/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T900	5/31/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-	T1131	9/23/2017
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	6/20/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1113	12/20/2017
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	AE0038201512	For connection purpose only
Spectrum Analyzer, PSA 3Hz to 44GHz	Keysight	E4446A	T123	10/20/2017
Directional Coupler	KRYTAR	152610	T1536	4/24/2018
Directional Coupler	KRYTAR	152610	T1537	4/24/2018
Power Meter, P-series single channel	Keysight	N1911A	T1265	12/14/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight	N1921A	T750	10/17/2017
Filter, HPF 3.0GHz	MICROTRONICS	HPM17543	T487	1/28/2018
Filter, HPF 1.2GHz	Micro-Tronics	WHKX1.2/15G-6ST	T1182	6/1/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T1210	6/30/2017
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T959	7/9/2017
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T971	8/5/2017
Chamber Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	9/10/2017
Antenna, Horn 1-18GHz	Emco	3115	T59	11/18/2017
Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	4/29/2018
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T404	7/5/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T449	6/12/2018
Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640	T90	8/19/2017
Spectrum Analyzer	Keysight	8564E	T106	9/7/2017
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T1616	12/12/2017

NOTE: Equipment that calibrated during the testing period was set for test after the calibration.

*Testing is completed before equipment expiration date.

7. TRANSMITTER OUTPUT POWER (CONDUCTED AND EIRP)

RULE PART(S)

FCC: §2.1046, §27.50

EIRP LIMIT

FCC 27.50 (h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

3GPP TR 36.827, TR.36 830 and TR 36.831

ANSI C63.26:2015

KDB 971168 Section 5.6

$$ERP/EIRP = P_{Meas} + GT - LC$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULT

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and EIRP output powers as follows:

7.1. LAT 1

7.1.1. LTE BAND 7

ID:	40813	Date:	5/18/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 7 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
10MHz / 20MHz	2505.5	2519.9	QPSK	1	49	1	0	23.5	22.5	33.0	-10.5
				50	0	100	0	21.7	20.7	33.0	-12.3
			16QAM	1	49	1	0	22.3	21.4	33.0	-11.6
				50	0	100	0	20.7	19.8	33.0	-13.3
			64QAM	1	49	1	0	20.8	19.9	33.0	-13.1
				50	0	100	0	20.8	19.9	33.0	-13.1
	2525.6	2540.0	QPSK	1	49	1	0	23.3	22.3	33.0	-10.7
				50	0	100	0	21.6	20.7	33.0	-12.3
			16QAM	1	49	1	0	22.3	21.3	33.0	-11.7
				50	0	100	0	20.6	19.7	33.0	-13.3
			64QAM	1	49	1	0	20.5	19.6	33.0	-13.5
				50	0	100	0	20.8	19.8	33.0	-13.2
	2545.6	2560.0	QPSK	1	49	1	0	23.8	22.8	33.0	-10.2
				50	0	100	0	21.6	20.7	33.0	-12.3
			16QAM	1	49	1	0	22.7	21.8	33.0	-11.2
				50	0	100	0	20.6	19.7	33.0	-13.3
			64QAM	1	49	1	0	20.7	19.8	33.0	-13.2
				50	0	100	0	20.8	19.9	33.0	-13.1

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2510.0	2524.4	QPSK	1	99	1	0	23.8	22.9	33.0	-10.2
				1	0	1	49	15.2	14.3	33.0	-18.7
				100	0	50	0	21.8	20.9	33.0	-12.1
			16QAM	1	99	1	0	22.5	21.5	33.0	-11.5
				1	0	1	49	15.1	14.2	33.0	-18.8
				100	0	50	0	21.3	20.3	33.0	-12.7
			64QAM	1	99	1	0	20.8	19.8	33.0	-13.2
				1	0	1	49	14.9	14.0	33.0	-19.1
				100	0	50	0	20.8	19.8	33.0	-13.2
	2530.1	2544.5	QPSK	1	99	1	0	23.8	22.8	33.0	-10.2
				1	0	1	49	15.3	14.3	33.0	-18.7
				100	0	50	0	21.8	20.8	33.0	-12.2
			16QAM	1	99	1	0	22.6	21.6	33.0	-11.4
				1	0	1	49	15.1	14.2	33.0	-18.8
				100	0	50	0	21.2	20.2	33.0	-12.8
			64QAM	1	99	1	0	20.8	19.9	33.0	-13.1
				1	0	1	49	15.2	14.3	33.0	-18.8
				100	0	50	0	20.8	19.9	33.0	-13.1
	2550.1	2564.5	QPSK	1	99	1	0	23.7	22.7	33.0	-10.3
				1	0	1	49	15.3	14.3	33.0	-18.7
				100	0	50	0	21.8	20.9	33.0	-12.2
			16QAM	1	99	1	0	22.7	21.8	33.0	-11.3
				1	0	1	49	15.1	14.1	33.0	-18.9
				100	0	50	0	21.2	20.3	33.0	-12.7
			64QAM	1	99	1	0	20.6	19.7	33.0	-13.3
				1	0	1	49	15.1	14.2	33.0	-18.8
				100	0	50	0	20.8	19.8	33.0	-13.2

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2507.5	2522.5	QPSK	1	74	1	0	23.7	22.8	33.0	-10.3
				75	0	75	0	21.6	20.7	33.0	-12.3
				1	74	1	0	22.7	21.7	33.0	-11.3
			16QAM	75	0	75	0	20.6	19.7	33.0	-13.3
				1	74	1	0	20.8	19.8	33.0	-13.2
				75	0	75	0	20.7	19.7	33.0	-13.3
			64QAM	1	74	1	0	20.8	19.8	33.0	-13.2
				75	0	75	0	20.7	19.7	33.0	-13.3
	2527.5	2542.5	QPSK	1	74	1	0	23.3	22.3	33.0	-10.7
				75	0	75	0	21.6	20.6	33.0	-12.4
				1	74	1	0	22.5	21.5	33.0	-11.5
			16QAM	75	0	75	0	20.6	19.6	33.0	-13.4
				1	74	1	0	20.6	19.6	33.0	-13.4
				75	0	75	0	20.8	19.8	33.0	-13.2
			64QAM	1	74	1	0	20.8	19.8	33.0	-13.2
				75	0	75	0	20.8	19.8	33.0	-13.2
	2547.5	2562.5	QPSK	1	74	1	0	23.8	22.8	33.0	-10.2
				75	0	75	0	21.6	20.6	33.0	-12.4
				1	74	1	0	22.4	21.4	33.0	-11.6
			16QAM	75	0	75	0	20.6	19.6	33.0	-13.4
				1	74	1	0	20.8	19.9	33.0	-13.1
				75	0	75	0	20.8	19.9	33.0	-13.2

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2507.8	2524.9	QPSK	1	74	1	0	23.7	22.8	33.0	-10.3
				75	0	100	0	21.7	20.7	33.0	-12.3
			16QAM	1	74	1	0	22.7	21.7	33.0	-11.3
				75	0	100	0	20.7	19.7	33.0	-13.3
			64QAM	1	74	1	0	20.8	19.9	33.0	-13.1
				75	0	100	0	20.5	19.5	33.0	-13.5
	2525.3	2542.4	QPSK	1	74	1	0	23.5	22.6	33.0	-10.4
				75	0	100	0	21.6	20.6	33.0	-12.4
			16QAM	1	74	1	0	22.5	21.6	33.0	-11.4
				75	0	100	0	20.6	19.6	33.0	-13.4
			64QAM	1	74	1	0	20.8	19.8	33.0	-13.2
				75	0	100	0	20.8	19.8	33.0	-13.2
	2542.9	2560.0	QPSK	1	74	1	0	23.6	22.6	33.0	-10.4
				75	0	100	0	21.5	20.6	33.0	-12.4
			16QAM	1	74	1	0	22.8	21.9	33.0	-11.1
				75	0	100	0	20.6	19.6	33.0	-13.4
			64QAM	1	74	1	0	20.6	19.6	33.0	-13.4
				75	0	100	0	20.8	19.8	33.0	-13.2

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2510.0	2527.1	QPSK	1	99	1	0	23.7	22.7	33.0	-10.3
				100	0	75	0	22.0	21.1	33.0	-11.9
			16QAM	1	99	1	0	22.3	21.4	33.0	-11.6
				100	0	75	0	21.0	20.1	33.0	-12.9
			64QAM	1	99	1	0	20.8	19.8	33.0	-13.2
				100	0	75	0	20.8	19.8	33.0	-13.2
	2527.6	2544.7	QPSK	1	99	1	0	23.8	22.8	33.0	-10.2
				100	0	75	0	22.0	21.0	33.0	-12.0
			16QAM	1	99	1	0	22.3	21.4	33.0	-11.6
				100	0	75	0	21.0	20.0	33.0	-13.0
			64QAM	1	99	1	0	20.8	19.9	33.0	-13.1
				100	0	75	0	20.8	19.9	33.0	-13.1
	2545.1	2562.2	QPSK	1	99	1	0	23.6	22.7	33.0	-10.3
				100	0	75	0	21.9	21.0	33.0	-12.0
			16QAM	1	99	1	0	22.7	21.7	33.0	-11.3
				100	0	75	0	21.0	20.1	33.0	-13.0
			64QAM	1	99	1	0	20.7	19.8	33.0	-13.2
				100	0	75	0	20.8	19.9	33.0	-13.1

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2510.0	2529.8	QPSK	1	99	1	0	23.8	22.8	33.0	-10.2
				1	0	1	99	15.1	14.1	33.0	-18.9
				100	0	100	0	21.7	20.8	33.0	-12.2
			16QAM	1	99	1	0	22.5	21.6	33.0	-11.4
				1	0	1	99	14.9	14.0	33.0	-19.0
				100	0	100	0	21.1	20.2	33.0	-12.8
			64QAM	1	99	1	0	20.8	19.8	33.0	-13.2
				1	0	1	99	15.2	14.2	33.0	-18.8
				100	0	100	0	20.8	19.8	33.0	-13.2
	2525.1	2544.9	QPSK	1	99	1	0	23.8	22.9	33.0	-10.1
				1	0	1	99	15.1	14.1	33.0	-18.9
				100	0	100	0	21.7	20.8	33.0	-12.2
			16QAM	1	99	1	0	22.7	21.7	33.0	-11.3
				1	0	1	99	14.9	14.0	33.0	-19.1
				100	0	100	0	21.1	20.1	33.0	-12.9
			64QAM	1	99	1	0	20.8	19.9	33.0	-13.1
				1	0	1	99	15.3	14.3	33.0	-18.7
				100	0	100	0	20.8	19.9	33.0	-13.1
	2540.2	2560.0	QPSK	1	99	1	0	23.7	22.7	33.0	-10.3
				1	0	1	99	15.1	14.2	33.0	-18.9
				100	0	100	0	21.8	20.8	33.0	-12.2
			16QAM	1	99	1	0	22.5	21.5	33.0	-11.5
				1	0	1	99	14.8	13.8	33.0	-19.2
				100	0	100	0	21.0	20.1	33.0	-12.9
			64QAM	1	99	1	0	20.5	19.5	33.0	-13.5
				1	0	1	99	15.0	14.1	33.0	-18.9
				100	0	100	0	20.8	19.9	33.0	-13.1

7.1.2. LTE BAND 41

ID:	40813	Date:	5/18/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (5.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
5MHz / 20MHz	2499.3	2511.0	QPSK	1	24	1	0	23.8	22.9	33.0	-10.1
				25	0	100	0	21.9	21.0	33.0	-12.0
			16QAM	1	24	1	0	22.8	21.8	33.0	-11.2
				25	0	100	0	21.0	20.1	33.0	-13.0
			64QAM	1	24	1	0	20.4	19.5	33.0	-13.5
				25	0	100	0	20.8	19.8	33.0	-13.2
	2583.8	2595.5	QPSK	1	24	1	0	23.8	22.9	33.0	-10.2
				25	0	100	0	21.9	21.0	33.0	-12.0
			16QAM	1	24	1	0	22.8	21.9	33.0	-11.1
				25	0	100	0	21.0	20.0	33.0	-13.0
			64QAM	1	24	1	0	20.4	19.5	33.0	-13.6
				25	0	100	0	20.8	19.8	33.0	-13.2
	2668.3	2680.0	QPSK	1	24	1	0	23.8	22.8	33.0	-10.2
				25	0	100	0	21.8	20.9	33.0	-12.2
			16QAM	1	24	1	0	22.6	21.6	33.0	-11.4
				25	0	100	0	20.8	19.8	33.0	-13.2
			64QAM	1	24	1	0	20.8	19.8	33.0	-13.2
				25	0	100	0	20.8	19.9	33.0	-13.1

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 5.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 5MHz	2506.0	2517.7	QPSK	1	99	1	0	23.6	22.7	33.0	-10.3
				1	0	1	24	15.3	14.3	33.0	-18.7
				100	0	25	0	21.7	20.8	33.0	-12.2
			16QAM	1	99	1	0	22.6	21.7	33.0	-11.3
				1	0	1	24	15.1	14.1	33.0	-18.9
				100	0	25	0	20.7	19.8	33.0	-13.2
			64QAM	1	99	1	0	20.7	19.8	33.0	-13.2
				1	0	1	24	15.1	14.2	33.0	-18.8
				100	0	25	0	20.6	19.7	33.0	-13.4
	2590.5	2602.2	QPSK	1	99	1	0	23.8	22.8	33.0	-10.2
				1	0	1	24	15.2	14.2	33.0	-18.8
				100	0	25	0	21.7	20.8	33.0	-12.3
			16QAM	1	99	1	0	22.7	21.7	33.0	-11.3
				1	0	1	24	15.0	14.1	33.0	-18.9
				100	0	25	0	20.7	19.8	33.0	-13.2
			64QAM	1	99	1	0	20.8	19.8	33.0	-13.2
				1	0	1	24	15.5	14.5	33.0	-18.5
				100	0	25	0	20.4	19.4	33.0	-13.6
	2675.0	2686.7	QPSK	1	99	1	0	23.5	22.5	33.0	-10.5
				1	0	1	24	15.1	14.2	33.0	-18.8
				100	0	25	0	21.3	20.3	33.0	-12.7
			16QAM	1	99	1	0	22.4	21.4	33.0	-11.6
				1	0	1	24	15.1	14.1	33.0	-18.9
				100	0	25	0	20.4	19.4	33.0	-13.6
			64QAM	1	99	1	0	20.6	19.6	33.0	-13.4
				1	0	1	24	15.0	14.1	33.0	-18.9
				100	0	25	0	20.6	19.7	33.0	-13.3

OUTPUT POWER FOR LTE BAND 41 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
10MHz / 20MHz	2501.5	2515.9	QPSK	1	49	1	0	23.8	22.8	33.0	-10.2
				50	0	100	0	21.5	20.6	33.0	-12.4
			16QAM	1	49	1	0	22.5	21.5	33.0	-11.5
				50	0	100	0	20.5	19.6	33.0	-13.4
			64QAM	1	49	1	0	20.8	19.8	33.0	-13.2
				50	0	100	0	20.8	19.8	33.0	-13.2
	2583.6	2598.0	QPSK	1	49	1	0	23.8	22.9	33.0	-10.1
				50	0	100	0	21.5	20.6	33.0	-12.4
			16QAM	1	49	1	0	22.8	21.9	33.0	-11.1
				50	0	100	0	20.6	19.6	33.0	-13.4
			64QAM	1	49	1	0	20.6	19.7	33.0	-13.4
				50	0	100	0	20.8	19.8	33.0	-13.2
	2665.6	2680.0	QPSK	1	49	1	0	23.5	22.6	33.0	-10.5
				50	0	100	0	21.3	20.4	33.0	-12.6
			16QAM	1	49	1	0	22.6	21.7	33.0	-11.4
				50	0	100	0	20.4	19.4	33.0	-13.6
			64QAM	1	49	1	0	20.8	19.9	33.0	-13.2
				50	0	100	0	20.7	19.8	33.0	-13.3

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2506.0	2520.4	QPSK	1	99	1	0	23.8	22.8	33.0	-10.2
				100	0	50	0	21.7	20.8	33.0	-12.3
			16QAM	1	99	1	0	22.7	21.8	33.0	-11.3
				100	0	50	0	20.7	19.8	33.0	-13.2
			64QAM	1	99	1	0	20.8	19.8	33.0	-13.2
				100	0	50	0	20.8	19.8	33.0	-13.2
	2588.1	2602.5	QPSK	1	99	1	0	23.7	22.7	33.0	-10.3
				100	0	50	0	21.7	20.8	33.0	-12.3
			16QAM	1	99	1	0	22.7	21.8	33.0	-11.2
				100	0	50	0	20.7	19.8	33.0	-13.2
			64QAM	1	99	1	0	20.7	19.8	33.0	-13.2
				100	0	50	0	20.8	19.9	33.0	-13.2
	2670.1	2684.5	QPSK	1	99	1	0	23.5	22.6	33.0	-10.5
				100	0	50	0	21.4	20.5	33.0	-12.6
			16QAM	1	99	1	0	22.3	21.4	33.0	-11.6
				100	0	50	0	20.4	19.5	33.0	-13.5
			64QAM	1	99	1	0	20.5	19.6	33.0	-13.4
				100	0	50	0	20.7	19.7	33.0	-13.3

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2503.5	2518.5	QPSK	1	74	1	0	23.8	22.8	33.0	-10.2
				75	0	75	0	21.4	20.4	33.0	-12.6
			16QAM	1	74	1	0	22.5	21.5	33.0	-11.5
				75	0	75	0	20.4	19.5	33.0	-13.5
			64QAM	1	74	1	0	20.8	19.8	33.0	-13.2
				75	0	75	0	20.7	19.8	33.0	-13.2
	2585.5	2600.5	QPSK	1	74	1	0	23.7	22.7	33.0	-10.3
				75	0	75	0	21.4	20.5	33.0	-12.6
			16QAM	1	74	1	0	22.7	21.8	33.0	-11.2
				75	0	75	0	20.5	19.5	33.0	-13.5
			64QAM	1	74	1	0	20.6	19.7	33.0	-13.4
				75	0	75	0	20.8	19.8	33.0	-13.2
	2667.5	2682.5	QPSK	1	74	1	0	23.8	22.9	33.0	-10.2
				75	0	75	0	21.5	20.6	33.0	-12.4
			16QAM	1	74	1	0	22.4	21.5	33.0	-11.5
				75	0	75	0	20.6	19.6	33.0	-13.4
			64QAM	1	74	1	0	20.8	19.9	33.0	-13.1
				75	0	75	0	20.8	19.9	33.0	-13.2

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2503.8	2520.9	QPSK	1	74	1	0	23.5	22.5	33.0	-10.5
				75	0	100	0	21.4	20.5	33.0	-12.5
			16QAM	1	74	1	0	22.8	21.9	33.0	-11.1
				75	0	100	0	20.4	19.5	33.0	-13.5
			64QAM	1	74	1	0	20.8	19.8	33.0	-13.2
				75	0	100	0	20.8	19.8	33.0	-13.2
	2583.3	2600.4	QPSK	1	74	1	0	23.7	22.7	33.0	-10.3
				75	0	100	0	21.4	20.5	33.0	-12.5
			16QAM	1	74	1	0	22.3	21.3	33.0	-11.7
				75	0	100	0	20.4	19.5	33.0	-13.5
			64QAM	1	74	1	0	20.8	19.9	33.0	-13.2
				75	0	100	0	20.8	19.9	33.0	-13.1
	2662.9	2680.0	QPSK	1	74	1	0	23.3	22.4	33.0	-10.6
				75	0	100	0	21.5	20.5	33.0	-12.5
			16QAM	1	74	1	0	22.8	21.9	33.0	-11.1
				75	0	100	0	20.6	19.6	33.0	-13.4
			64QAM	1	74	1	0	20.8	19.8	33.0	-13.2
				75	0	100	0	20.8	19.9	33.0	-13.1

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2506.0	2523.1	QPSK	1	99	1	0	23.8	22.9	33.0	-10.2
				100	0	75	0	21.9	20.9	33.0	-12.1
			16QAM	1	99	1	0	22.7	21.8	33.0	-11.2
				100	0	75	0	20.9	19.9	33.0	-13.1
			64QAM	1	99	1	0	20.8	19.9	33.0	-13.2
				100	0	75	0	20.8	19.9	33.0	-13.1
			QPSK	1	99	1	0	23.8	22.9	33.0	-10.1
				100	0	75	0	21.8	20.9	33.0	-12.1
	2585.6	2602.7	16QAM	1	99	1	0	22.7	21.7	33.0	-11.3
				100	0	75	0	20.8	19.9	33.0	-13.1
			64QAM	1	99	1	0	20.8	19.8	33.0	-13.2
				100	0	75	0	20.8	19.9	33.0	-13.1
			QPSK	1	99	1	0	23.8	22.8	33.0	-10.2
				100	0	75	0	21.5	20.6	33.0	-12.4
			16QAM	1	99	1	0	22.7	21.7	33.0	-11.3
				100	0	75	0	20.5	19.6	33.0	-13.4
	2665.1	2682.2	64QAM	1	99	1	0	20.8	19.9	33.0	-13.1
				100	0	75	0	20.7	19.7	33.0	-13.3

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)		-0.94									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2506.0	2525.8	QPSK	1	99	1	0	23.8	22.9	33.0	-10.1
				1	0	1	99	15.3	14.4	33.0	-18.6
				100	0	100	0	21.5	20.6	33.0	-12.4
			16QAM	1	99	1	0	22.7	21.8	33.0	-11.2
				1	0	1	99	15.3	14.4	33.0	-18.6
				100	0	100	0	20.6	19.6	33.0	-13.4
			64QAM	1	99	1	0	20.8	19.9	33.0	-13.1
				1	0	1	99	15.3	14.3	33.0	-18.7
				100	0	100	0	20.8	19.8	33.0	-13.2
	2583.1	2602.9	QPSK	1	99	1	0	23.7	22.8	33.0	-10.3
				1	0	1	99	15.3	14.3	33.0	-18.7
				100	0	100	0	21.6	20.6	33.0	-12.4
			16QAM	1	99	1	0	22.6	21.6	33.0	-11.4
				1	0	1	99	15.0	14.1	33.0	-18.9
				100	0	100	0	20.6	19.6	33.0	-13.4
			64QAM	1	99	1	0	20.7	19.7	33.0	-13.3
				1	0	1	99	15.3	14.3	33.0	-18.7
				100	0	100	0	20.7	19.8	33.0	-13.3
	2660.2	2680.0	QPSK	1	99	1	0	23.8	22.9	33.0	-10.1
				1	0	1	99	15.0	14.1	33.0	-18.9
				100	0	100	0	21.3	20.3	33.0	-12.7
			16QAM	1	99	1	0	22.6	21.7	33.0	-11.3
				1	0	1	99	15.0	14.1	33.0	-19.0
				100	0	100	0	20.4	19.5	33.0	-13.5
			64QAM	1	99	1	0	20.8	19.9	33.0	-13.1
				1	0	1	99	15.2	14.3	33.0	-18.7
				100	0	100	0	20.4	19.5	33.0	-13.5

7.2. UAT 1

7.2.1. LTE BAND 7

ID:	50820	Date:	5/19/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 7 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		-2.33									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
10MHz / 20MHz	2505.5	2519.9	QPSK	1	49	1	0	19.8	17.5	33.0	-15.5
				50	0	100	0	17.7	15.4	33.0	-17.6
			16QAM	1	49	1	0	18.6	16.3	33.0	-16.7
				50	0	100	0	16.8	14.5	33.0	-18.5
			64QAM	1	49	1	0	16.8	14.5	33.0	-18.6
				50	0	100	0	16.7	14.4	33.0	-18.6
	2525.6	2540.0	QPSK	1	49	1	0	19.7	17.4	33.0	-15.6
				50	0	100	0	17.8	15.5	33.0	-17.5
			16QAM	1	49	1	0	18.6	16.2	33.0	-16.8
				50	0	100	0	16.8	14.5	33.0	-18.5
			64QAM	1	49	1	0	16.8	14.5	33.0	-18.5
				50	0	100	0	16.7	14.4	33.0	-18.6
	2545.6	2560.0	QPSK	1	49	1	0	19.7	17.3	33.0	-15.7
				50	0	100	0	17.8	15.5	33.0	-17.5
			16QAM	1	49	1	0	18.4	16.1	33.0	-17.0
				50	0	100	0	16.9	14.6	33.0	-18.5
			64QAM	1	49	1	0	16.6	14.3	33.0	-18.7
				50	0	100	0	16.7	14.4	33.0	-18.6

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		-2.33									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2510.0	2524.4	QPSK	1	99	1	0	19.7	17.4	33.0	-15.6
				1	0	1	49	11.0	8.6	33.0	-24.4
				100	0	50	0	17.8	15.5	33.0	-17.6
			16QAM	1	99	1	0	18.7	16.4	33.0	-16.7
				1	0	1	49	11.1	8.7	33.0	-24.3
				100	0	50	0	16.3	13.9	33.0	-19.1
			64QAM	1	99	1	0	16.5	14.2	33.0	-18.8
				1	0	1	49	11.1	8.8	33.0	-24.2
				100	0	50	0	16.8	14.5	33.0	-18.6
	2530.1	2544.5	QPSK	1	99	1	0	19.7	17.4	33.0	-15.6
				1	0	1	49	11.1	8.8	33.0	-24.3
				100	0	50	0	17.7	15.3	33.0	-17.7
			16QAM	1	99	1	0	18.8	16.5	33.0	-16.5
				1	0	1	49	11.2	8.9	33.0	-24.1
				100	0	50	0	16.6	14.2	33.0	-18.8
			64QAM	1	99	1	0	16.7	14.4	33.0	-18.6
				1	0	1	49	11.3	8.9	33.0	-24.1
				100	0	50	0	16.8	14.4	33.0	-18.6
	2550.1	2564.5	QPSK	1	99	1	0	19.8	17.5	33.0	-15.5
				1	0	1	49	11.1	8.8	33.0	-24.2
				100	0	50	0	17.7	15.3	33.0	-17.7
			16QAM	1	99	1	0	18.8	16.5	33.0	-16.5
				1	0	1	49	11.3	9.0	33.0	-24.1
				100	0	50	0	16.8	14.5	33.0	-18.5
			64QAM	1	99	1	0	16.8	14.4	33.0	-18.6
				1	0	1	49	11.2	8.8	33.0	-24.2
				100	0	50	0	16.8	14.5	33.0	-18.6

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		-2.33									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2507.5	2522.5	QPSK	1	74	1	0	19.8	17.4	33.0	-15.6
				75	0	75	0	17.4	15.0	33.0	-18.0
				1	74	1	0	18.7	16.4	33.0	-16.6
			16QAM	75	0	75	0	16.4	14.1	33.0	-18.9
				1	74	1	0	16.8	14.5	33.0	-18.6
				75	0	75	0	16.8	14.4	33.0	-18.6
			64QAM	1	74	1	0	19.7	17.4	33.0	-15.6
				75	0	75	0	17.3	15.0	33.0	-18.0
				1	74	1	0	18.7	16.4	33.0	-16.6
	2527.5	2542.5	QPSK	75	0	75	0	16.4	14.1	33.0	-19.0
				1	74	1	0	16.8	14.5	33.0	-18.6
				75	0	75	0	16.8	14.5	33.0	-18.5
			16QAM	1	74	1	0	19.8	17.5	33.0	-15.6
				75	0	75	0	17.6	15.3	33.0	-17.8
				1	74	1	0	18.7	16.4	33.0	-16.6
			64QAM	75	0	75	0	16.6	14.3	33.0	-18.8
				1	74	1	0	16.6	14.2	33.0	-18.8
				75	0	75	0	16.7	14.4	33.0	-18.6

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		-2.33									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2507.8	2524.9	QPSK	1	74	1	0	19.8	17.4	33.0	-15.6
				75	0	100	0	17.4	15.1	33.0	-17.9
			16QAM	1	74	1	0	18.6	16.2	33.0	-16.8
				75	0	100	0	16.4	14.1	33.0	-18.9
	2525.3	2542.4	64QAM	1	74	1	0	16.6	14.3	33.0	-18.8
				75	0	100	0	16.7	14.4	33.0	-18.6
			QPSK	1	74	1	0	19.7	17.3	33.0	-15.7
				75	0	100	0	17.7	15.4	33.0	-17.7
			16QAM	1	74	1	0	18.3	16.0	33.0	-17.0
				75	0	100	0	16.7	14.4	33.0	-18.6
			64QAM	1	74	1	0	16.7	14.4	33.0	-18.6
				75	0	100	0	16.8	14.5	33.0	-18.5
	2542.9	2560.0	QPSK	1	74	1	0	19.6	17.2	33.0	-15.8
				75	0	100	0	17.4	15.1	33.0	-17.9
			16QAM	1	74	1	0	18.5	16.1	33.0	-16.9
				75	0	100	0	16.5	14.1	33.0	-18.9
			64QAM	1	74	1	0	16.5	14.2	33.0	-18.8
				75	0	100	0	16.8	14.5	33.0	-18.5

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		-2.33									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2510.0	2527.1	QPSK	1	99	1	0	19.7	17.4	33.0	-15.6
				100	0	75	0	17.8	15.4	33.0	-17.6
			16QAM	1	99	1	0	18.7	16.3	33.0	-16.7
				100	0	75	0	16.8	14.4	33.0	-18.6
	2527.6	2544.7	64QAM	1	99	1	0	16.8	14.4	33.0	-18.6
				100	0	75	0	16.6	14.3	33.0	-18.7
			QPSK	1	99	1	0	19.7	17.4	33.0	-15.7
				100	0	75	0	17.8	15.4	33.0	-17.6
			16QAM	1	99	1	0	18.8	16.4	33.0	-16.6
				100	0	75	0	16.7	14.4	33.0	-18.6
			64QAM	1	99	1	0	16.8	14.5	33.0	-18.6
				100	0	75	0	16.8	14.5	33.0	-18.5
	2545.1	2562.2	QPSK	1	99	1	0	19.6	17.3	33.0	-15.7
				100	0	75	0	17.8	15.5	33.0	-17.5
			16QAM	1	99	1	0	18.7	16.4	33.0	-16.6
				100	0	75	0	16.8	14.5	33.0	-18.6
			64QAM	1	99	1	0	16.5	14.1	33.0	-18.9
				100	0	75	0	16.6	14.3	33.0	-18.7

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)		-2.33									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2510.0	2529.8	QPSK	1	99	1	0	19.8	17.5	33.0	-15.6
				1	0	1	99	11.2	8.9	33.0	-24.1
				100	0	100	0	17.7	15.3	33.0	-17.7
			16QAM	1	99	1	0	18.7	16.4	33.0	-16.6
				1	0	1	99	11.2	8.8	33.0	-24.2
				100	0	100	0	16.7	14.4	33.0	-18.6
			64QAM	1	99	1	0	16.7	14.3	33.0	-18.7
				1	0	1	99	11.0	8.7	33.0	-24.3
				100	0	100	0	16.7	14.4	33.0	-18.7
	2525.1	2544.9	QPSK	1	99	1	0	19.7	17.4	33.0	-15.6
				1	0	1	99	11.3	9.0	33.0	-24.1
				100	0	100	0	17.8	15.4	33.0	-17.6
			16QAM	1	99	1	0	18.6	16.3	33.0	-16.7
				1	0	1	99	11.3	9.0	33.0	-24.0
				100	0	100	0	16.7	14.4	33.0	-18.7
			64QAM	1	99	1	0	16.8	14.5	33.0	-18.5
				1	0	1	99	11.2	8.9	33.0	-24.1
				100	0	100	0	16.7	14.4	33.0	-18.6
	2540.2	2560.0	QPSK	1	99	1	0	19.7	17.3	33.0	-15.7
				1	0	1	99	11.3	9.0	33.0	-24.0
				100	0	100	0	17.8	15.4	33.0	-17.6
			16QAM	1	99	1	0	18.7	16.3	33.0	-16.7
				1	0	1	99	11.3	9.0	33.0	-24.0
				100	0	100	0	16.9	14.6	33.0	-18.4
			64QAM	1	99	1	0	16.8	14.5	33.0	-18.5
				1	0	1	99	11.3	8.9	33.0	-24.1
				100	0	100	0	16.7	14.3	33.0	-18.7

7.2.2. LTE BAND 41

ID:	40813	Date:	5/20/17
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (5.0MHz + 20.0MHz)

Antenna Gain (dBi)		-2.31									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
5MHz / 20MHz	2499.3	2511.0	QPSK	1	24	1	0	19.2	16.9	33.0	-16.2
				25	0	100	0	17.2	14.9	33.0	-18.1
			16QAM	1	24	1	0	18.1	15.8	33.0	-17.2
				25	0	100	0	16.1	13.8	33.0	-19.2
			64QAM	1	24	1	0	16.3	14.0	33.0	-19.1
				25	0	100	0	16.2	13.9	33.0	-19.1
	2583.8	2595.5	QPSK	1	24	1	0	19.3	16.9	33.0	-16.1
				25	0	100	0	17.2	14.9	33.0	-18.1
			16QAM	1	24	1	0	18.3	16.0	33.0	-17.0
				25	0	100	0	16.1	13.8	33.0	-19.2
			64QAM	1	24	1	0	16.0	13.7	33.0	-19.3
				25	0	100	0	16.3	14.0	33.0	-19.0
	2668.3	2680.0	QPSK	1	24	1	0	19.1	16.8	33.0	-16.2
				25	0	100	0	17.5	15.2	33.0	-17.9
			16QAM	1	24	1	0	18.3	16.0	33.0	-17.1
				25	0	100	0	16.4	14.1	33.0	-18.9
			64QAM	1	24	1	0	16.3	14.0	33.0	-19.0
				25	0	100	0	16.2	13.9	33.0	-19.1

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 5.0MHz)

Antenna Gain (dBi)		-2.31									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 5MHz	2506.0	2517.7	QPSK	1	99	1	0	19.1	16.8	33.0	-16.2
				1	0	1	24	10.8	8.5	33.0	-24.5
				100	0	25	0	17.2	14.9	33.0	-18.1
			16QAM	1	99	1	0	18.0	15.7	33.0	-17.3
				1	0	1	24	10.8	8.5	33.0	-24.6
				100	0	25	0	16.2	13.9	33.0	-19.2
			64QAM	1	99	1	0	16.3	14.0	33.0	-19.0
				1	0	1	24	10.7	8.4	33.0	-24.6
				100	0	25	0	16.3	14.0	33.0	-19.0
	2590.5	2602.2	QPSK	1	99	1	0	19.3	17.0	33.0	-16.0
				1	0	1	24	10.7	8.4	33.0	-24.6
				100	0	25	0	17.2	14.9	33.0	-18.1
			16QAM	1	99	1	0	18.2	15.9	33.0	-17.1
				1	0	1	24	10.7	8.4	33.0	-24.6
				100	0	25	0	16.2	13.9	33.0	-19.1
			64QAM	1	99	1	0	16.3	14.0	33.0	-19.0
				1	0	1	24	10.6	8.3	33.0	-24.7
				100	0	25	0	16.2	13.9	33.0	-19.1
	2675.0	2686.7	QPSK	1	99	1	0	19.2	16.9	33.0	-16.2
				1	0	1	24	10.8	8.5	33.0	-24.5
				100	0	25	0	17.2	14.9	33.0	-18.1
			16QAM	1	99	1	0	18.0	15.7	33.0	-17.3
				1	0	1	24	10.8	8.5	33.0	-24.5
				100	0	25	0	16.0	13.7	33.0	-19.3
			64QAM	1	99	1	0	16.1	13.8	33.0	-19.2
				1	0	1	24	10.7	8.4	33.0	-24.6
				100	0	25	0	16.2	13.9	33.0	-19.1

OUTPUT POWER FOR LTE BAND 41 (10.0MHz + 20.0MHz)

Antenna Gain (dBi)		-2.31															
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)						
				Size	Offset	Size	Offset										
10MHz / 20MHz	2501.5	2515.9	QPSK	1	49	1	0	19.2	16.9	33.0	-16.1						
				50	0	100	0	17.1	14.7	33.0	-18.3						
			16QAM	1	49	1	0	18.3	16.0	33.0	-17.0						
				50	0	100	0	16.4	14.1	33.0	-18.9						
			64QAM	1	49	1	0	16.3	14.0	33.0	-19.1						
				50	0	100	0	16.3	14.0	33.0	-19.1						
	2583.6	2598.0	QPSK	1	49	1	0	19.2	16.9	33.0	-16.1						
				50	0	100	0	17.1	14.7	33.0	-18.3						
			16QAM	1	49	1	0	18.2	15.9	33.0	-17.1						
				50	0	100	0	16.2	13.8	33.0	-19.2						
			64QAM	1	49	1	0	16.2	13.9	33.0	-19.2						
				50	0	100	0	16.2	13.9	33.0	-19.1						
	2665.6	2680.0	QPSK	1	49	1	0	19.2	16.9	33.0	-16.1						
				50	0	100	0	17.3	15.0	33.0	-18.0						
			16QAM	1	49	1	0	18.1	15.8	33.0	-17.2						
				50	0	100	0	16.2	13.8	33.0	-19.2						
			64QAM	1	49	1	0	16.3	14.0	33.0	-19.0						
				50	0	100	0	16.2	13.9	33.0	-19.1						

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 10.0MHz)

Antenna Gain (dBi)		-2.31									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 10MHz	2506.0	2520.4	QPSK	1	99	1	0	19.3	17.0	33.0	-16.0
				100	0	50	0	17.2	14.9	33.0	-18.1
			16QAM	1	99	1	0	18.2	15.8	33.0	-17.2
				100	0	50	0	16.1	13.8	33.0	-19.2
			64QAM	1	99	1	0	16.3	14.0	33.0	-19.0
				100	0	50	0	16.2	13.9	33.0	-19.1
	2588.1	2602.5	QPSK	1	99	1	0	19.3	17.0	33.0	-16.0
				100	0	50	0	17.3	15.0	33.0	-18.0
			16QAM	1	99	1	0	18.3	16.0	33.0	-17.1
				100	0	50	0	16.3	14.0	33.0	-19.0
			64QAM	1	99	1	0	16.3	14.0	33.0	-19.0
				100	0	50	0	16.3	14.0	33.0	-19.0
	2670.1	2684.5	QPSK	1	99	1	0	19.1	16.8	33.0	-16.3
				100	0	50	0	17.1	14.8	33.0	-18.2
			16QAM	1	99	1	0	18.2	15.9	33.0	-17.1
				100	0	50	0	16.0	13.7	33.0	-19.4
			64QAM	1	99	1	0	16.3	13.9	33.0	-19.1
				100	0	50	0	16.2	13.9	33.0	-19.2

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 15.0MHz)

Antenna Gain (dBi)		-2.31									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 15MHz	2503.5	2518.5	QPSK	1	74	1	0	19.1	16.8	33.0	-16.3
				75	0	75	0	17.2	14.9	33.0	-18.1
			16QAM	1	74	1	0	18.1	15.8	33.0	-17.2
				75	0	75	0	16.3	14.0	33.0	-19.1
			64QAM	1	74	1	0	16.2	13.9	33.0	-19.1
				75	0	75	0	16.3	14.0	33.0	-19.0
	2585.5	2600.5	QPSK	1	74	1	0	19.1	16.8	33.0	-16.2
				75	0	75	0	17.2	14.9	33.0	-18.2
			16QAM	1	74	1	0	18.2	15.9	33.0	-17.1
				75	0	75	0	16.1	13.8	33.0	-19.2
			64QAM	1	74	1	0	16.3	14.0	33.0	-19.1
				75	0	75	0	16.3	14.0	33.0	-19.1
	2667.5	2682.5	QPSK	1	74	1	0	19.3	17.0	33.0	-16.1
				75	0	75	0	17.3	15.0	33.0	-18.0
			16QAM	1	74	1	0	18.1	15.7	33.0	-17.3
				75	0	75	0	16.4	14.1	33.0	-19.0
			64QAM	1	74	1	0	16.2	13.9	33.0	-19.1
				75	0	75	0	16.3	14.0	33.0	-19.1

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 20.0MHz)

Antenna Gain (dBi)		-2.31									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
15MHz / 20MHz	2503.8	2520.9	QPSK	1	74	1	0	19.1	16.8	33.0	-16.2
				75	0	100	0	17.3	15.0	33.0	-18.0
			16QAM	1	74	1	0	18.3	16.0	33.0	-17.0
				75	0	100	0	16.5	14.2	33.0	-18.8
			64QAM	1	74	1	0	16.3	14.0	33.0	-19.1
				75	0	100	0	16.3	14.0	33.0	-19.1
	2583.3	2600.4	QPSK	1	74	1	0	19.3	17.0	33.0	-16.0
				75	0	100	0	17.1	14.8	33.0	-18.2
			16QAM	1	74	1	0	18.3	16.0	33.0	-17.0
				75	0	100	0	16.2	13.9	33.0	-19.2
			64QAM	1	74	1	0	16.3	14.0	33.0	-19.0
				75	0	100	0	16.2	13.9	33.0	-19.1
	2662.9	2680.0	QPSK	1	74	1	0	19.3	17.0	33.0	-16.0
				75	0	100	0	17.5	15.2	33.0	-17.8
			16QAM	1	74	1	0	18.3	16.0	33.0	-17.1
				75	0	100	0	16.4	14.1	33.0	-18.9
			64QAM	1	74	1	0	16.2	13.9	33.0	-19.1
				75	0	100	0	16.2	13.9	33.0	-19.1

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 15.0MHz)

Antenna Gain (dBi)		-2.31									
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz / 15MHz	2506.0	2523.1	QPSK	1	99	1	0	19.1	16.8	33.0	-16.3
				100	0	75	0	17.1	14.8	33.0	-18.2
			16QAM	1	99	1	0	18.2	15.9	33.0	-17.1
				100	0	75	0	15.9	13.6	33.0	-19.4
			64QAM	1	99	1	0	16.3	14.0	33.0	-19.0
				100	0	75	0	16.3	14.0	33.0	-19.0
	2585.6	2602.7	QPSK	1	99	1	0	19.2	16.9	33.0	-16.2
				100	0	75	0	17.1	14.8	33.0	-18.3
			16QAM	1	99	1	0	18.1	15.8	33.0	-17.2
				100	0	75	0	16.3	14.0	33.0	-19.0
			64QAM	1	99	1	0	16.3	14.0	33.0	-19.0
				100	0	75	0	16.2	13.9	33.0	-19.1
	2665.1	2682.2	QPSK	1	99	1	0	19.1	16.8	33.0	-16.2
				100	0	75	0	17.2	14.9	33.0	-18.1
			16QAM	1	99	1	0	18.0	15.7	33.0	-17.4
				100	0	75	0	16.3	14.0	33.0	-19.0
			64QAM	1	99	1	0	16.3	13.9	33.0	-19.1
				100	0	75	0	16.3	14.0	33.0	-19.0

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 20.0MHz)

Antenna Gain (dBi)	-2.31										
Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
				Size	Offset	Size	Offset				
20MHz/ 20MHz	2506.0	2525.8	QPSK	1	99	1	0	19.2	16.9	33.0	-16.1
				1	0	1	99	10.8	8.5	33.0	-24.5
				100	0	100	0	17.0	14.7	33.0	-18.4
			16QAM	1	99	1	0	18.3	16.0	33.0	-17.0
				1	0	1	99	10.7	8.4	33.0	-24.6
				100	0	100	0	16.1	13.8	33.0	-19.3
			64QAM	1	99	1	0	16.2	13.9	33.0	-19.1
				1	0	1	99	10.8	8.5	33.0	-24.5
				100	0	100	0	16.3	14.0	33.0	-19.0
	2583.1	2602.9	QPSK	1	99	1	0	19.2	16.9	33.0	-16.1
				1	0	1	99	10.7	8.4	33.0	-24.6
				100	0	100	0	17.2	14.9	33.0	-18.1
			16QAM	1	99	1	0	18.1	15.8	33.0	-17.2
				1	0	1	99	10.8	8.5	33.0	-24.6
				100	0	100	0	16.1	13.8	33.0	-19.2
			64QAM	1	99	1	0	16.3	14.0	33.0	-19.0
				1	0	1	99	10.7	8.4	33.0	-24.6
				100	0	100	0	16.3	14.0	33.0	-19.0
	2660.2	2680.0	QPSK	1	99	1	0	19.3	17.0	33.0	-16.0
				1	0	1	99	10.8	8.4	33.0	-24.6
				100	0	100	0	17.1	14.7	33.0	-18.3
			16QAM	1	99	1	0	18.2	15.9	33.0	-17.1
				1	0	1	99	10.7	8.4	33.0	-24.6
				100	0	100	0	16.1	13.8	33.0	-19.2
			64QAM	1	99	1	0	16.2	13.9	33.0	-19.1
				1	0	1	99	10.6	8.3	33.0	-24.7
				100	0	100	0	16.2	13.9	33.0	-19.1

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

LTE BAND 7


BAND	MODE	RB SIZE/ RB OFFSET	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 7	20MHz + 10MHz BAND QPSK	100/0 + 50/0	2535	28.065	30.21
	20MHz + 10MHz BAND 16QAM			28.032	30.15
	20MHz + 10MHz BAND 64QAM			27.992	29.95
	20MHz + 20MHz BAND QPSK	100/0 + 100/0		37.710	40.33
	20MHz + 20MHz BAND 16QAM			37.689	40.25
	20MHz + 20MHz BAND 64QAM			37.702	40.04
	10MHz + 20MHz BAND QPSK	50/0 + 100/0		27.9993	30.159
	10MHz + 20MHz BAND 16QAM			27.9722	29.999
	10MHz + 20MHz BAND 64QAM			28.0081	29.951
	15MHz + 15MHz BAND QPSK	75/0 + 75/0		28.625	30.79
	15MHz + 15MHz BAND 16QAM			28.567	32.17
	15MHz + 15MHz BAND 64QAM			28.575	30.70
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		32.850	35.27
	15MHz + 20MHz BAND 16QAM			32.872	35.11
	15MHz + 20MHz BAND 64QAM			32.762	35.01
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.862	35.21
	20MHz + 15MHz BAND 16QAM			32.859	35.06
	20MHz + 15MHz BAND 64QAM			32.655	34.89

LTE BAND 41


BAND	MODE	RB SIZE/ RB	f	99% BW (MHz)	- 26dB BW
LTE BAND 41	20MHz + 5MHz BAND QPSK	100/0 + 25/0	2593	23.341	25.61
	20MHz + 5MHz BAND 16OAM			23.329	26.02
	20MHz + 5MHz BAND 64OAM			23.216	24.99
	20MHz + 20MHz BAND QPSK	100/0 + 100/0		37.765	40.45
	20MHz + 20MHz BAND 16OAM			37.820	41.22
	20MHz + 20MHz BAND 64OAM			37.564	39.88
	5MHz + 20MHz BAND QPSK	25/0 + 100/0		23.421	25.84
	5MHz + 20MHz BAND 16OAM			23.320	25.07
	5MHz + 20MHz BAND 64OAM			23.231	25.08
	10MHz + 20MHz BAND QPSK	50/0 + 100/0		28.115	30.79
	10MHz + 20MHz BAND 16OAM			28.092	30.07
	10MHz + 20MHz BAND 64OAM			27.955	30.49
	20MHz + 10MHz BAND QPSK	100/0 + 50/0		28.075	31.01
	20MHz + 10MHz BAND 16OAM			28.003	30.17
	20MHz + 10MHz BAND 64OAM			28.000	29.95
	15MHz + 15MHz BAND QPSK	75/0 + 75/0		28.713	30.68
	15MHz + 15MHz BAND 16OAM			28.650	31.53
	15MHz + 15MHz BAND 64OAM			28.484	30.54
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		32.956	38.24
	15MHz + 20MHz BAND 16OAM			32.921	37.51
	15MHz + 20MHz BAND 64OAM			32.610	34.87
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		33.069	34.99
	20MHz + 15MHz BAND 16OAM			32.883	36.49
	20MHz + 15MHz BAND 64OAM			32.786	34.95

8.1.1. LTE BAND 7


QPSK, (20.0MHz + 10.0MHz BAND WIDTH)

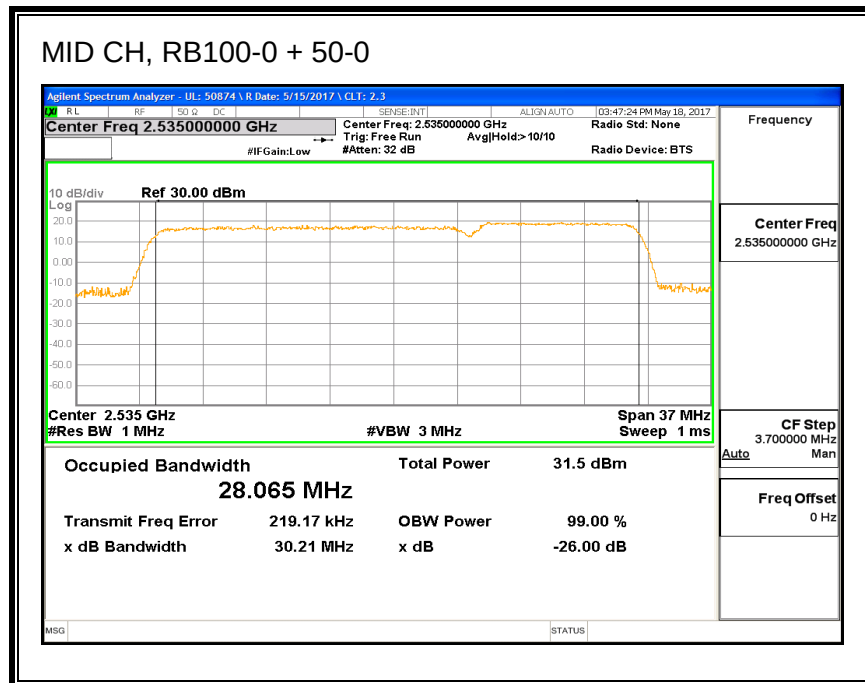


16QAM, (20.0MHz + 10.0MHz BAND WIDTH)

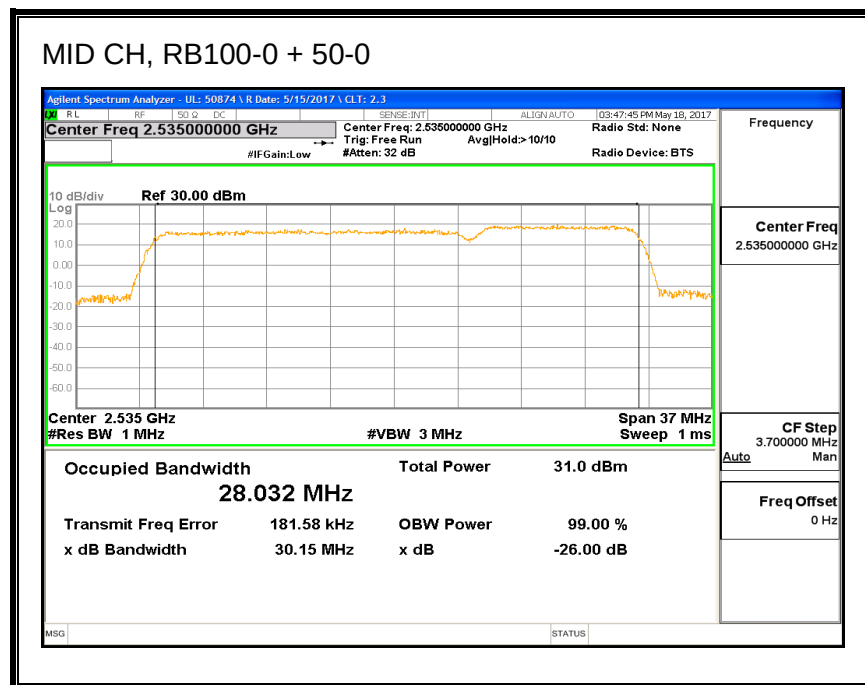


64QAM, (20.0MHz + 10.0MHz BAND WIDTH)

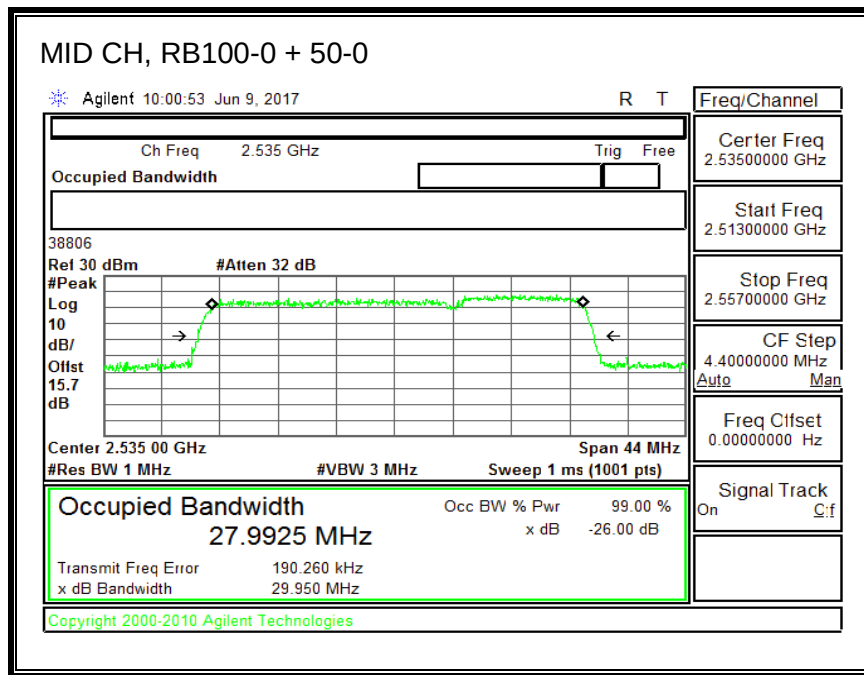


QPSK, (20.0MHz + 20.0MHz BAND WIDTH)

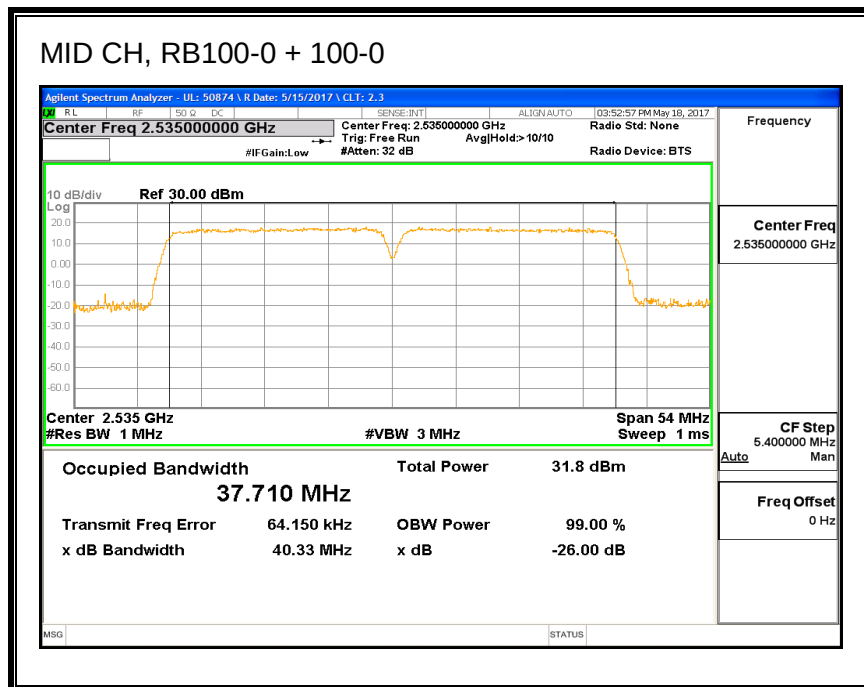


16QAM, (20.0MHz + 20.0MHz BAND WIDTH)

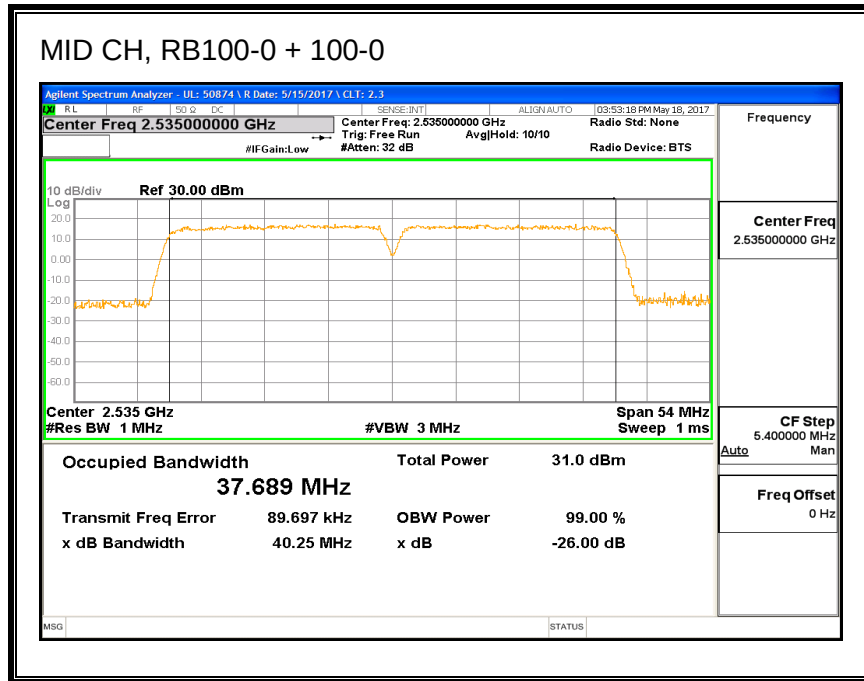


64QAM, (20.0MHz + 20.0MHz BAND WIDTH)

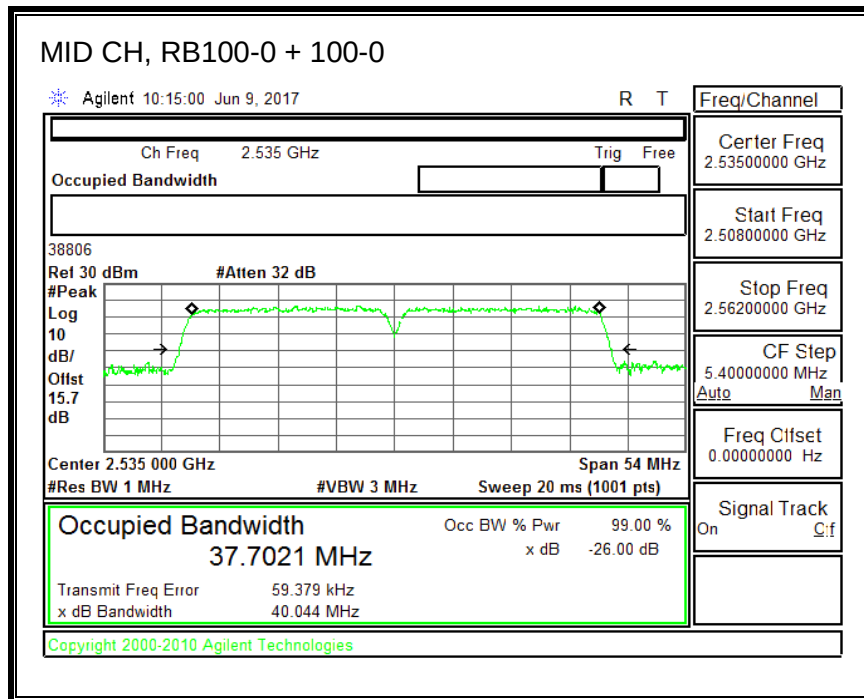


QPSK, (10.0MHz + 20.0MHz BAND WIDTH)

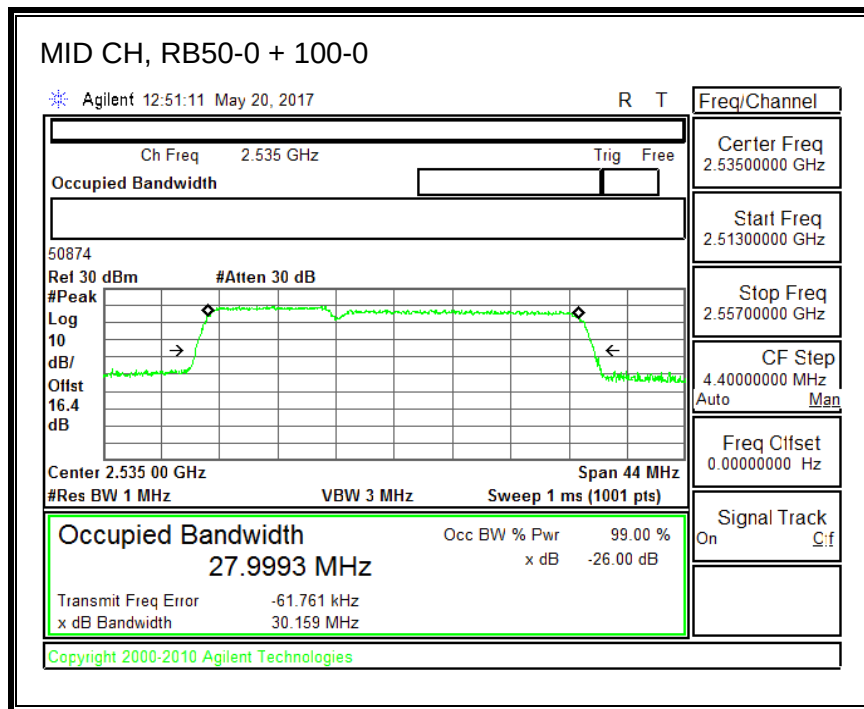


16QAM, (10.0MHz + 20.0MHz BAND WIDTH)

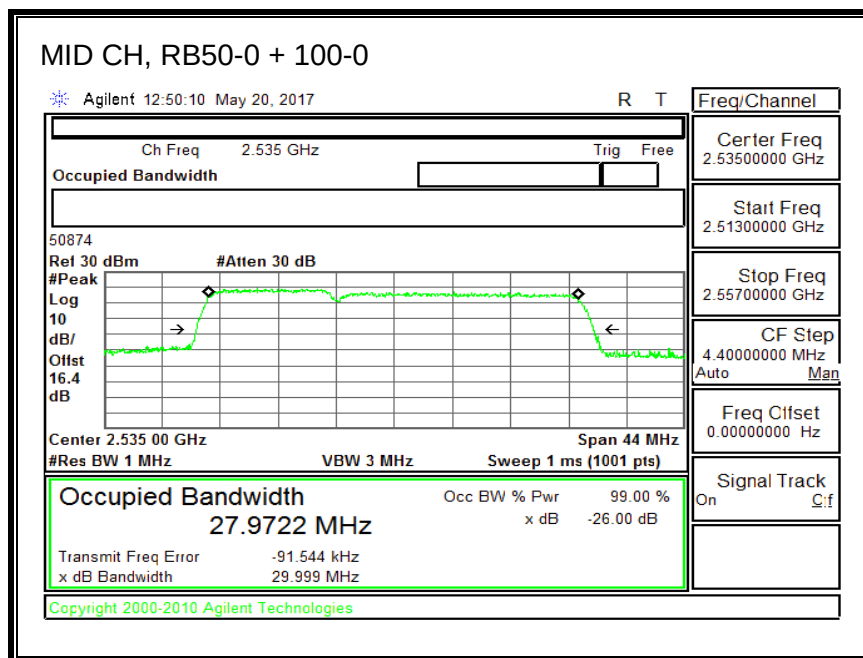


64QAM, (10.0MHz + 20.0MHz BAND WIDTH)

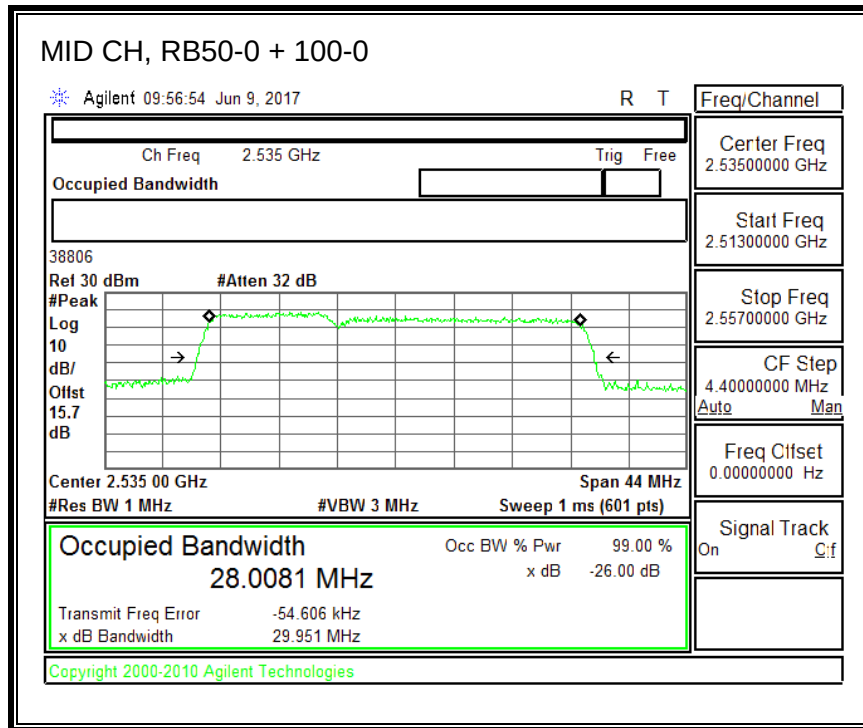


QPSK, (15.0MHz + 15.0MHz BAND WIDTH)

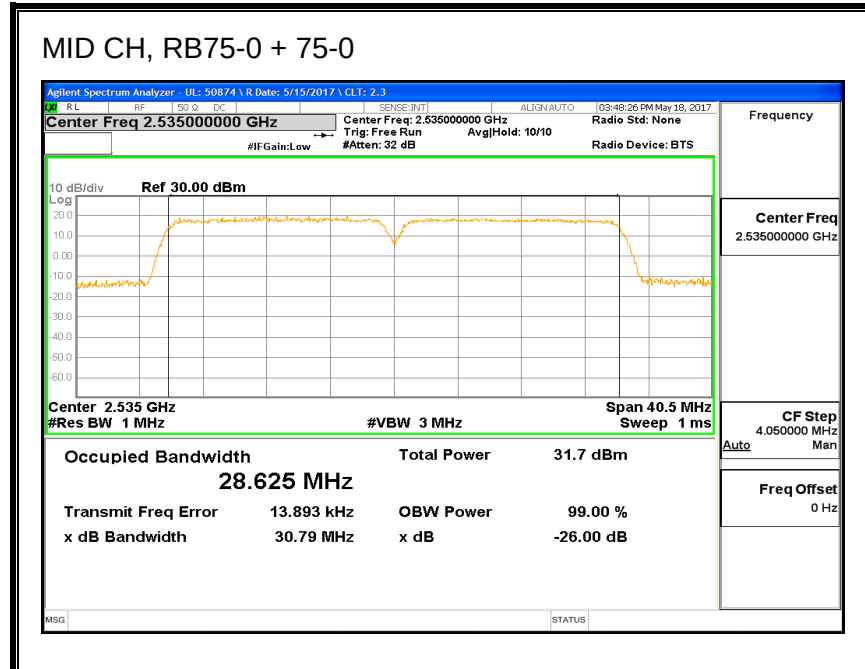


16QAM, (15.0MHz + 15.0MHz BAND WIDTH)

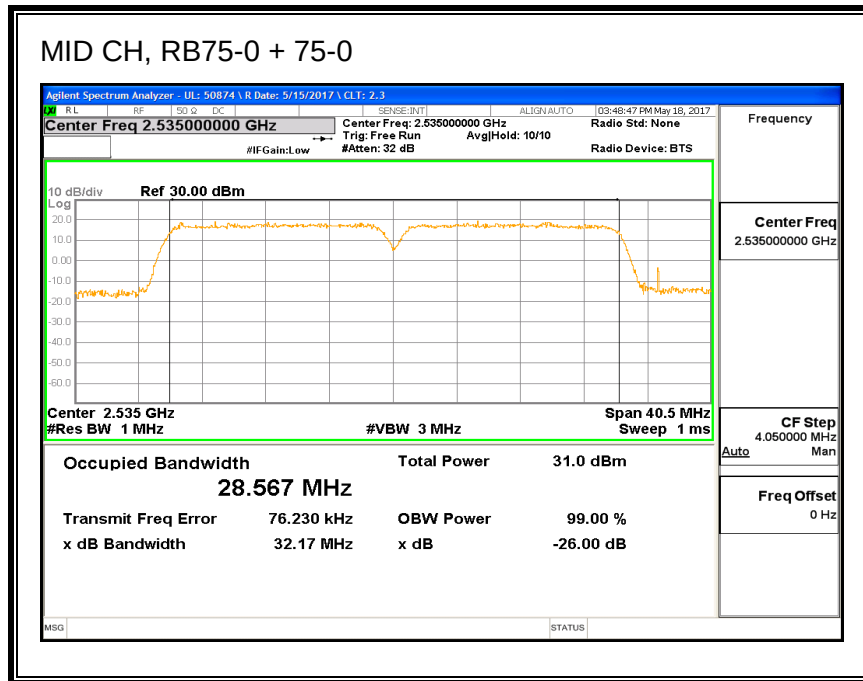


64QAM, (15.0MHz + 15.0MHz BAND WIDTH)

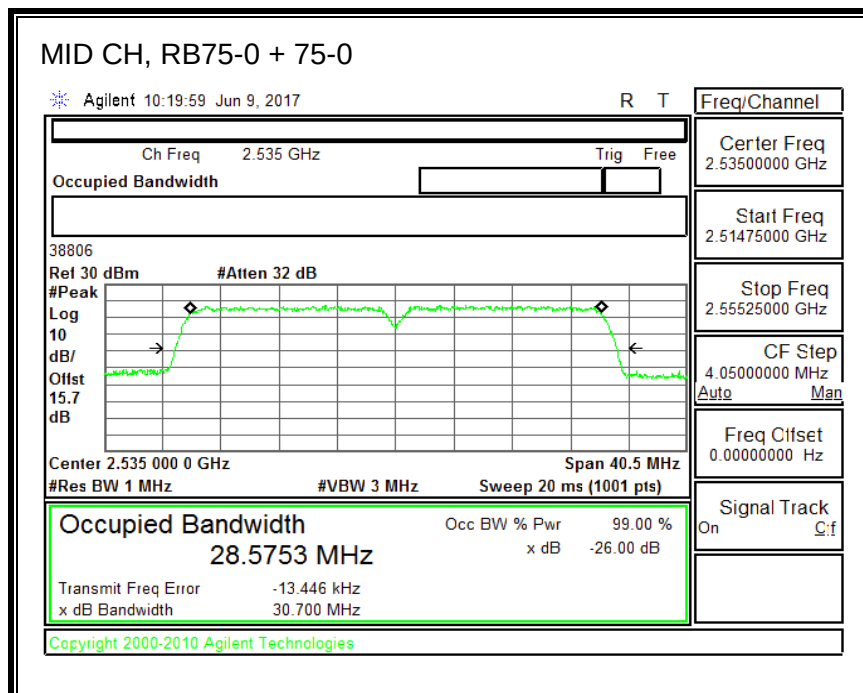


QPSK, (15.0MHz + 20.0MHz BAND WIDTH)

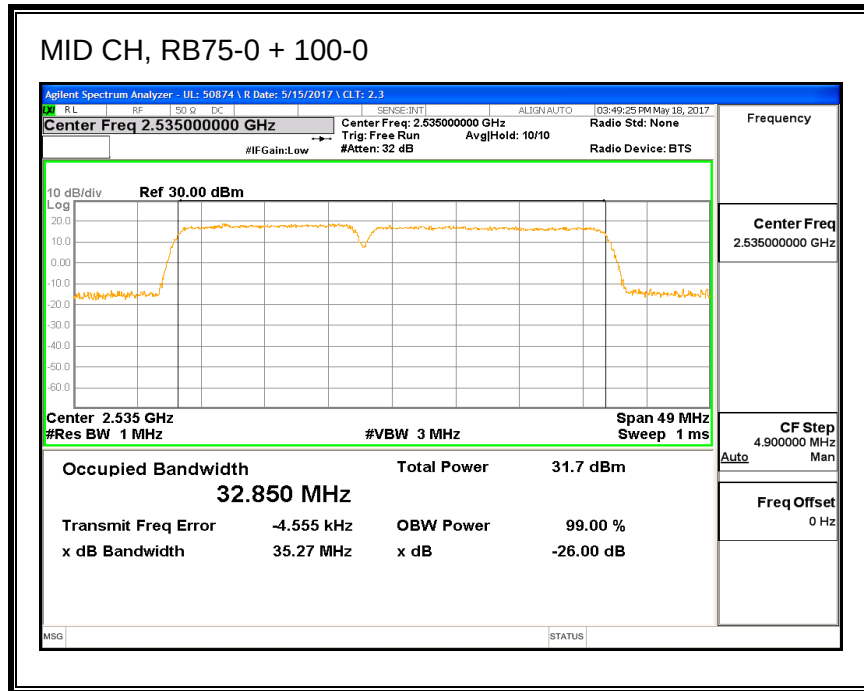


16QAM, (15.0MHz + 20.0MHz BAND WIDTH)

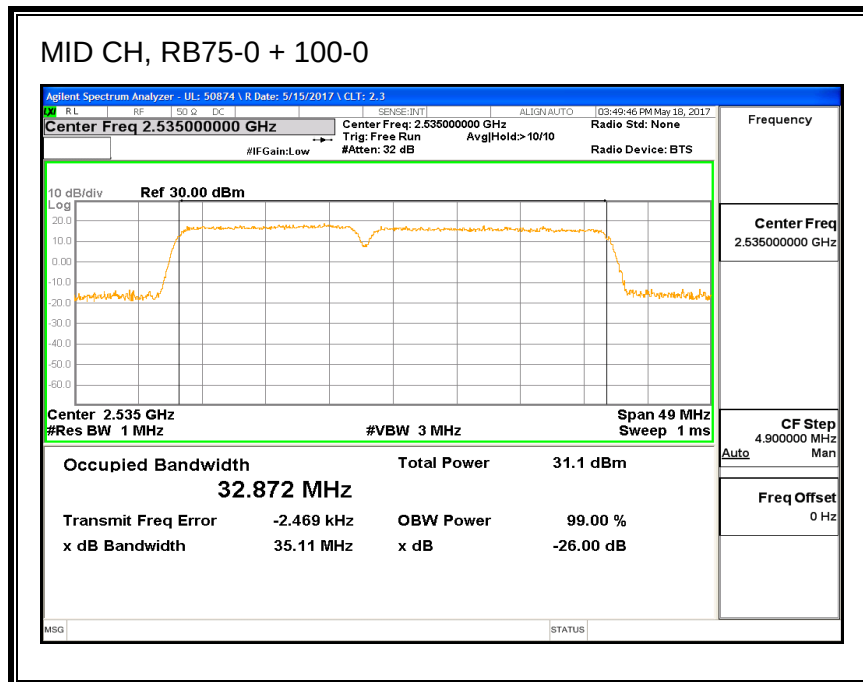


64QAM, (15.0MHz + 20.0MHz BAND WIDTH)

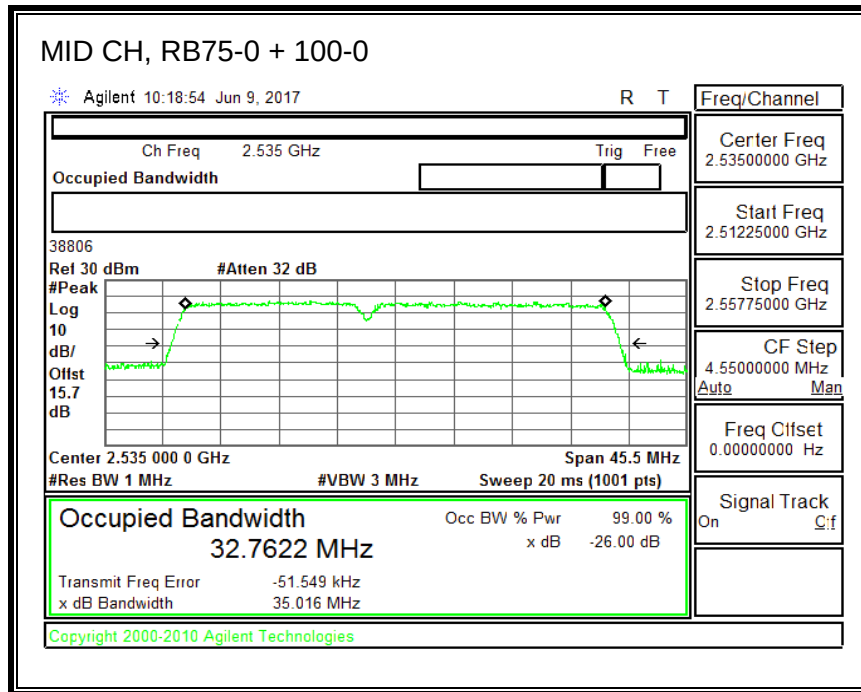


QPSK, (20.0MHz + 15.0MHz BAND WIDTH)

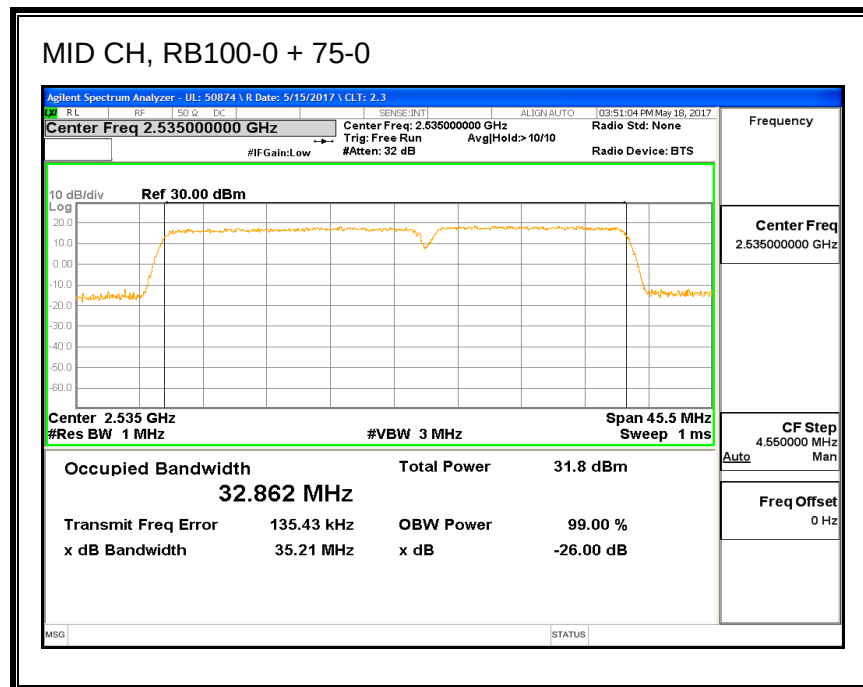

16QAM, (20.0MHz + 15.0MHz BAND WIDTH)

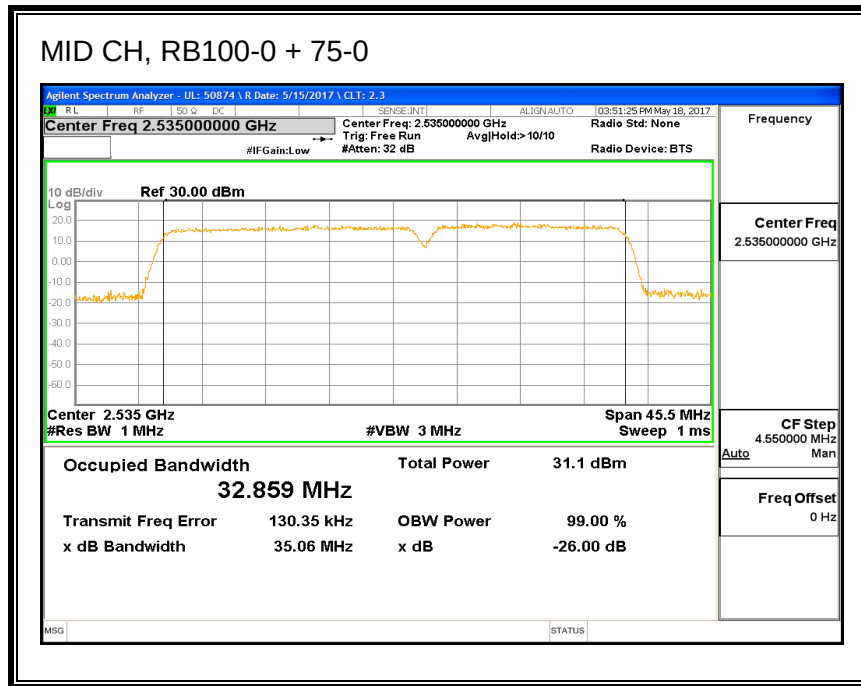


64QAM, (20.0MHz + 15.0MHz BAND WIDTH)

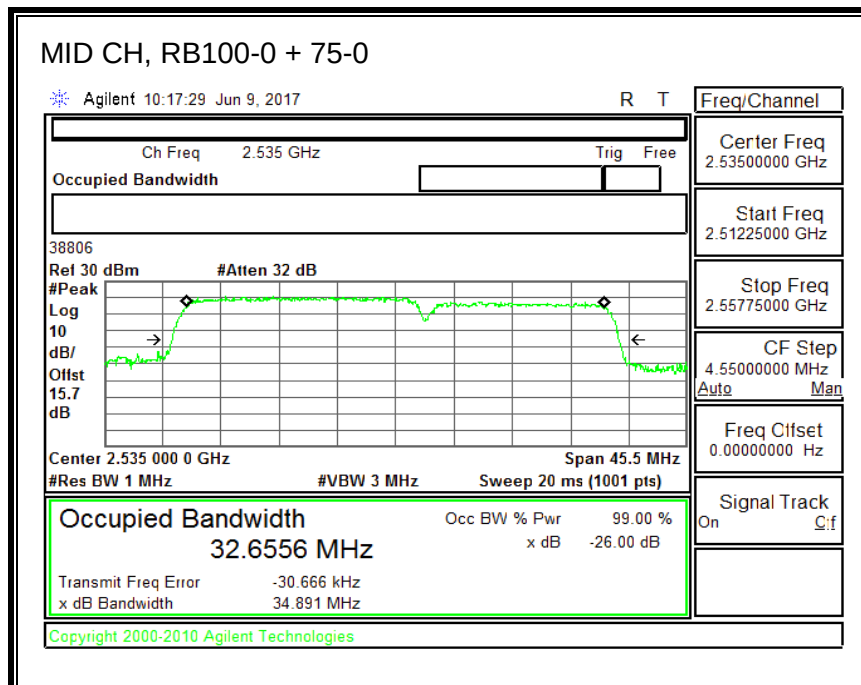


8.1.2. LTE BAND 41


QPSK, (20.0MHz + 5.0MHz BAND WIDTH)

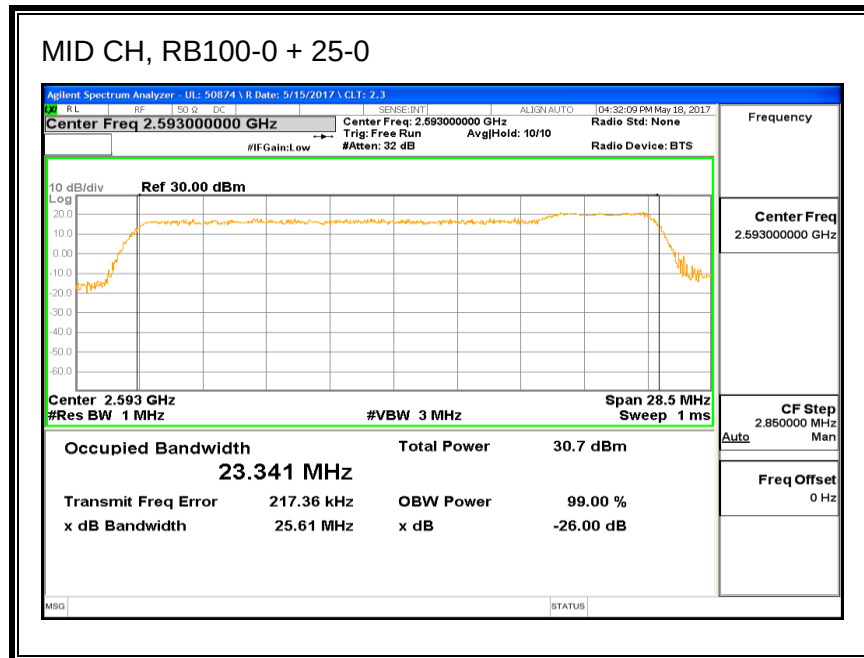


16QAM, (20.0MHz + 5.0MHz BAND WIDTH)

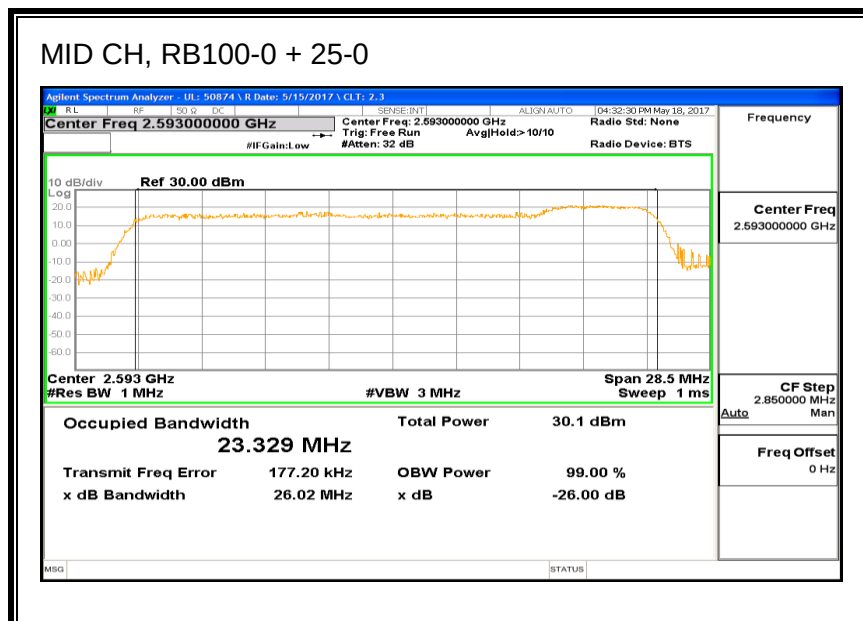


64QAM, (20.0MHz + 5.0MHz BAND WIDTH)

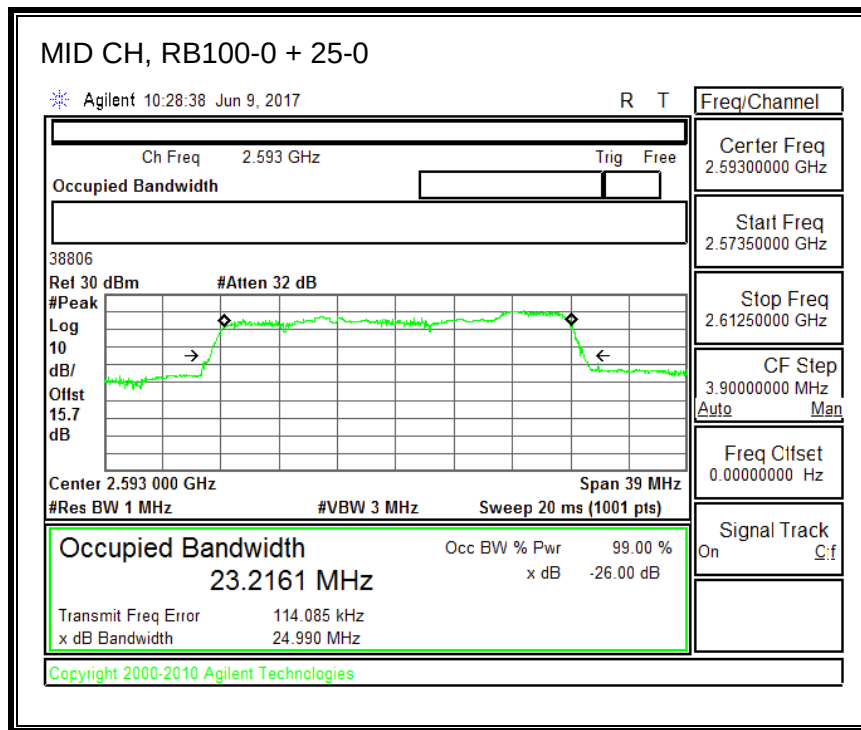


QPSK, (20.0MHz + 20.0MHz BAND WIDTH)

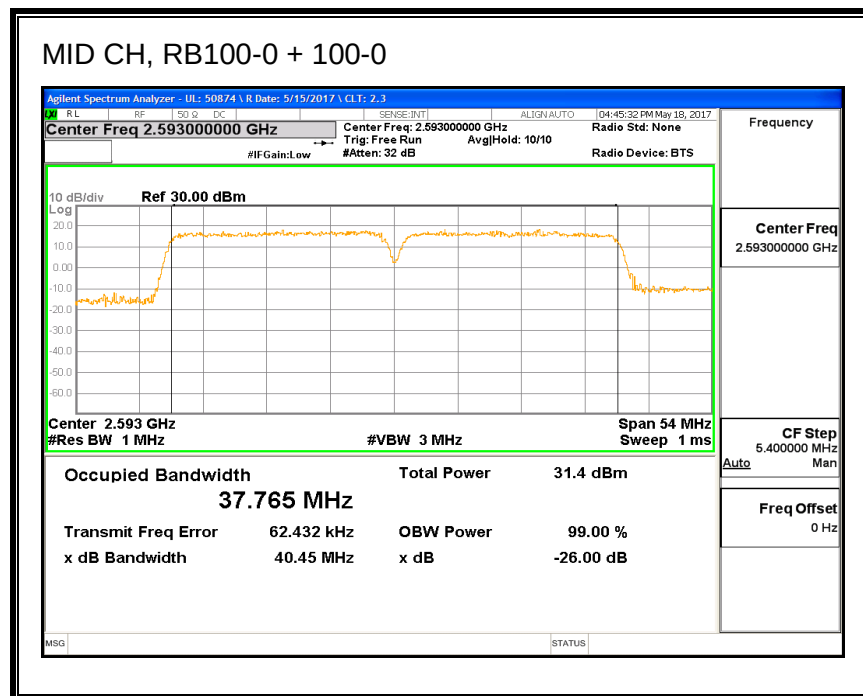


16QAM, (20.0MHz + 20.0MHz BAND WIDTH)

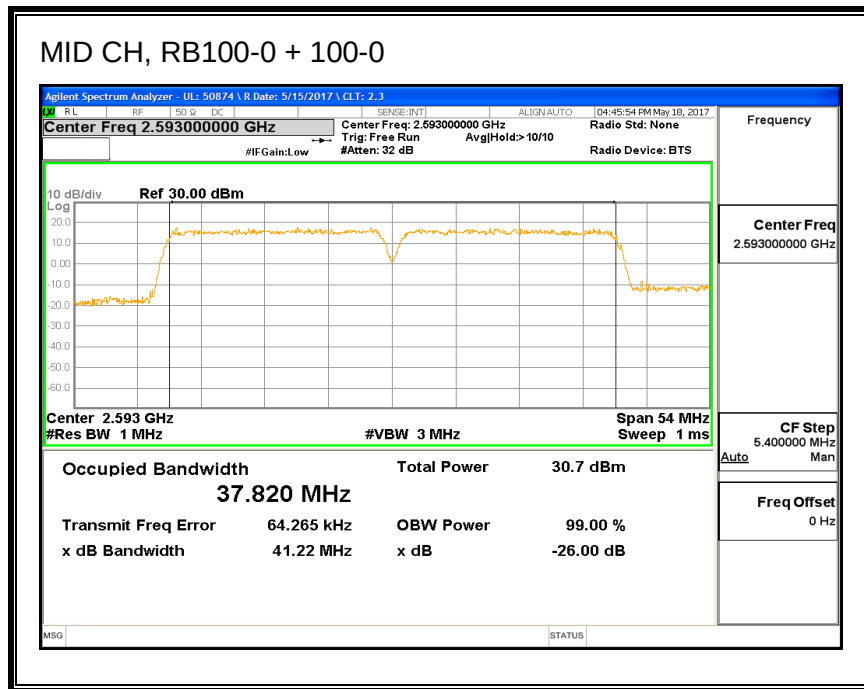


64QAM, (20.0MHz + 20.0MHz BAND WIDTH)

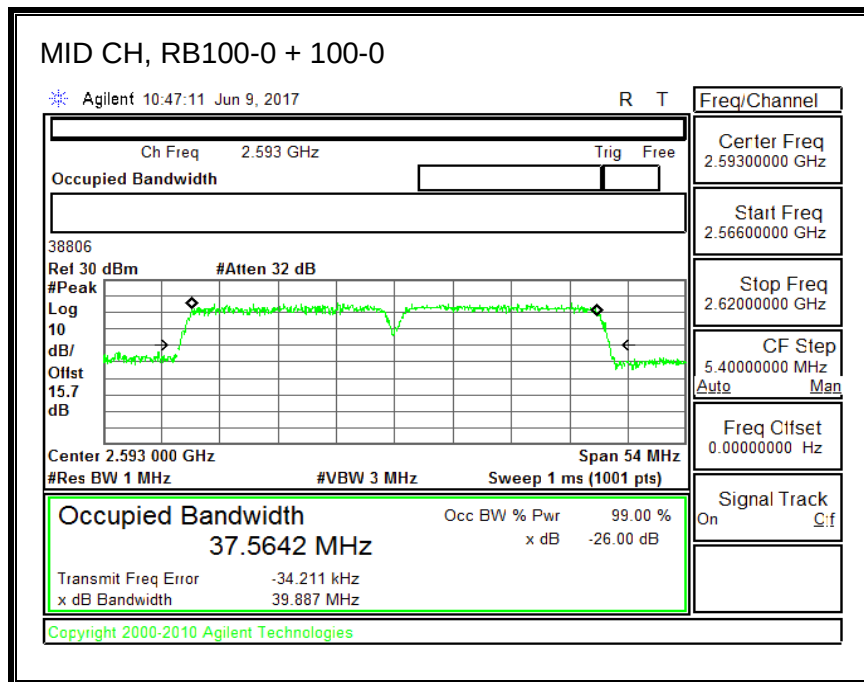


QPSK, (5.0MHz + 20.0MHz BAND WIDTH)

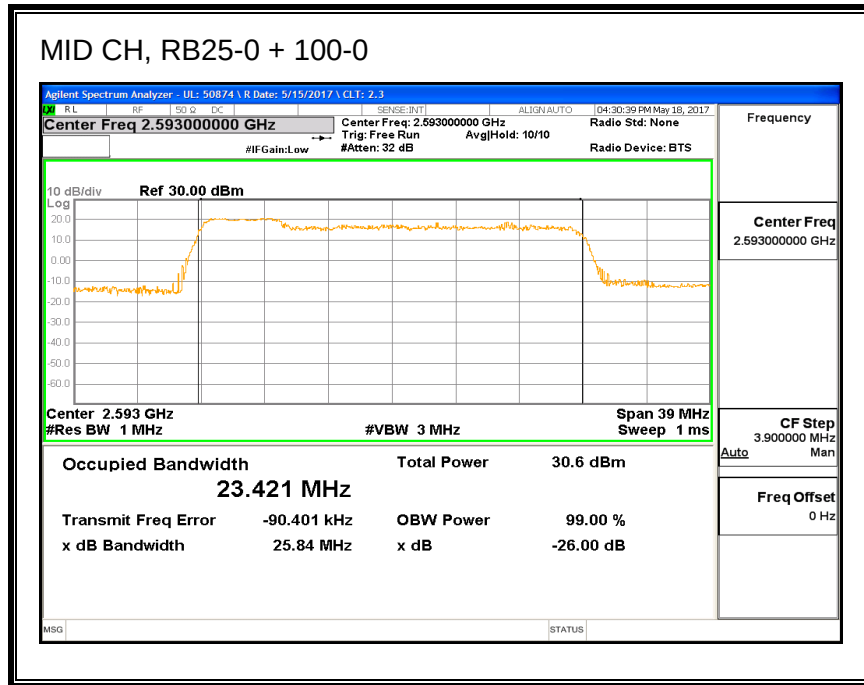


16QAM, (5.0MHz + 20.0MHz BAND WIDTH)

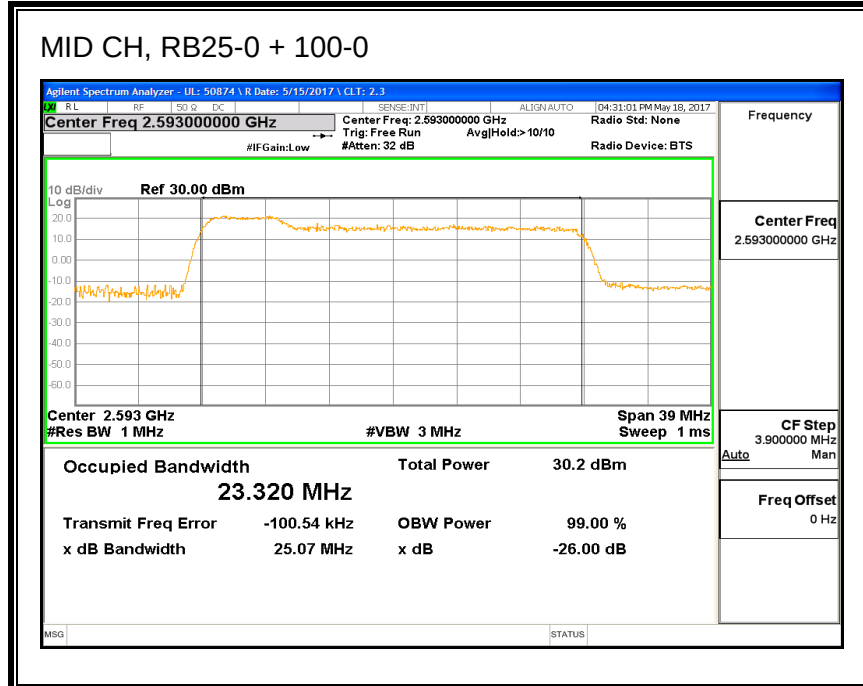


64QAM, (5.0MHz + 20.0MHz BAND WIDTH)

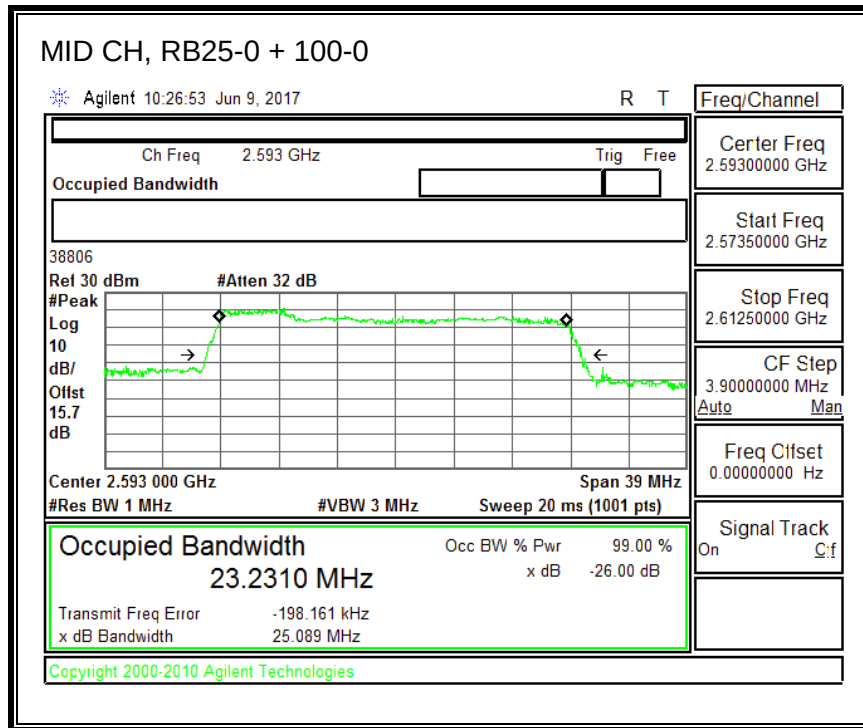


QPSK, (10.0MHz + 20.0MHz BAND WIDTH)

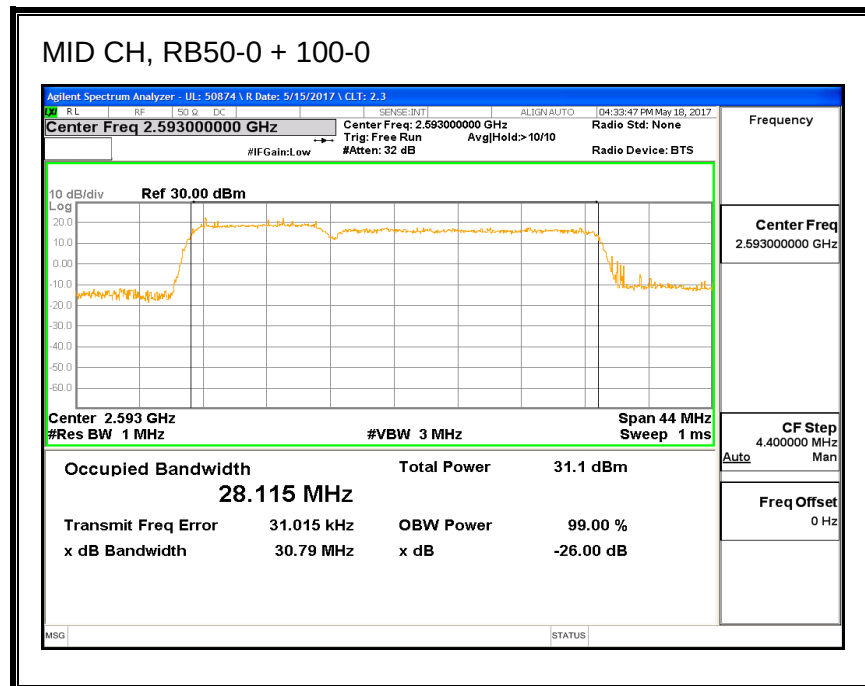


16QAM, (10.0MHz + 20.0MHz BAND WIDTH)

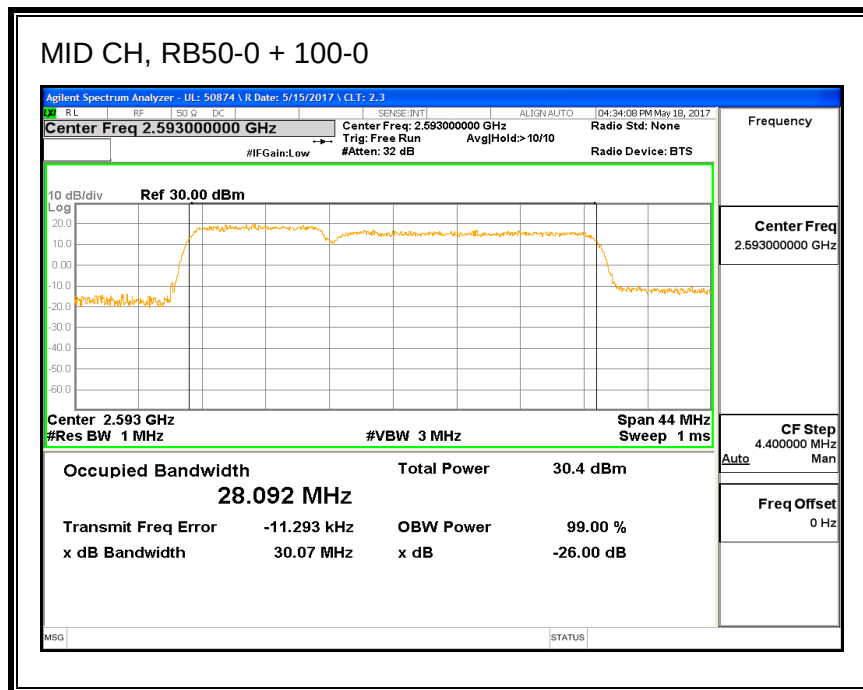


64QAM, (10.0MHz + 20.0MHz BAND WIDTH)

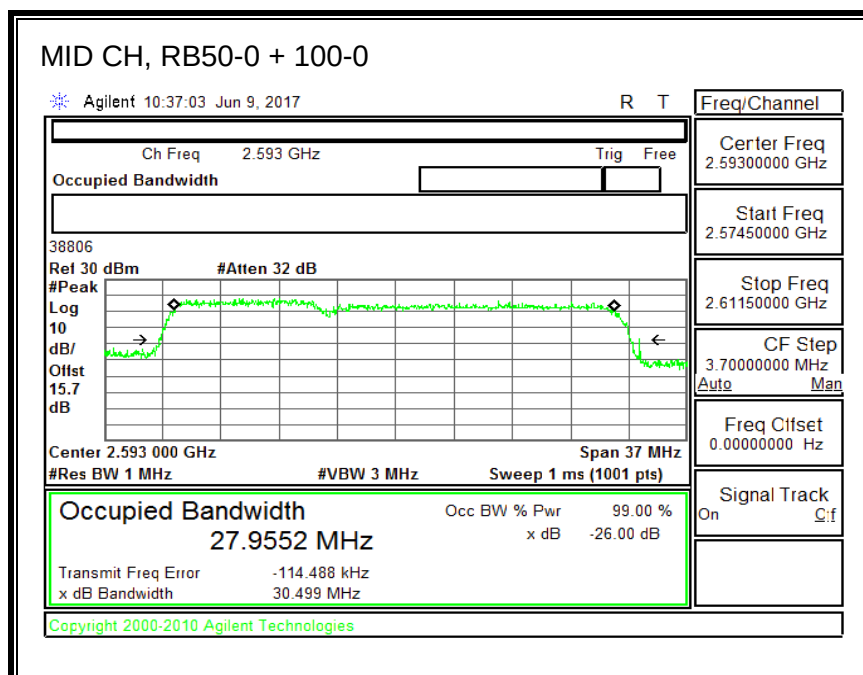


QPSK, (20.0MHz + 10.0MHz BAND WIDTH)

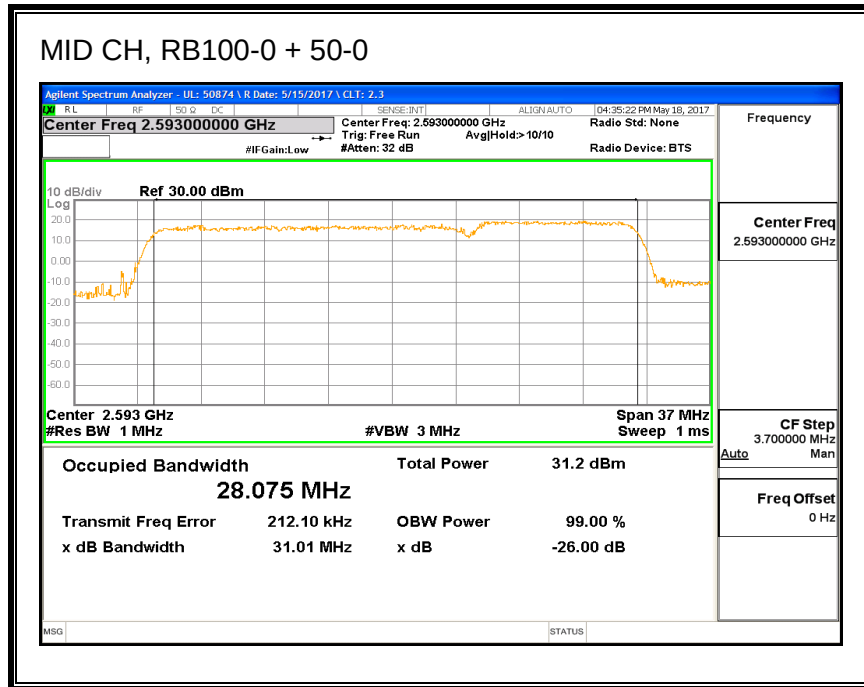


16QAM, (20.0MHz + 10.0MHz BAND WIDTH)

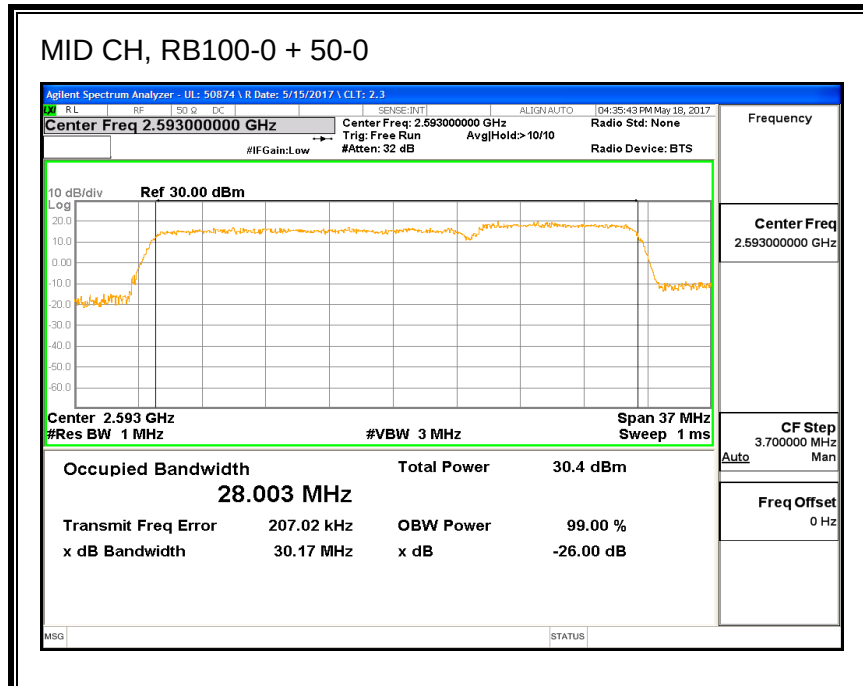

64QAM, (20.0MHz + 10.0MHz BAND WIDTH)

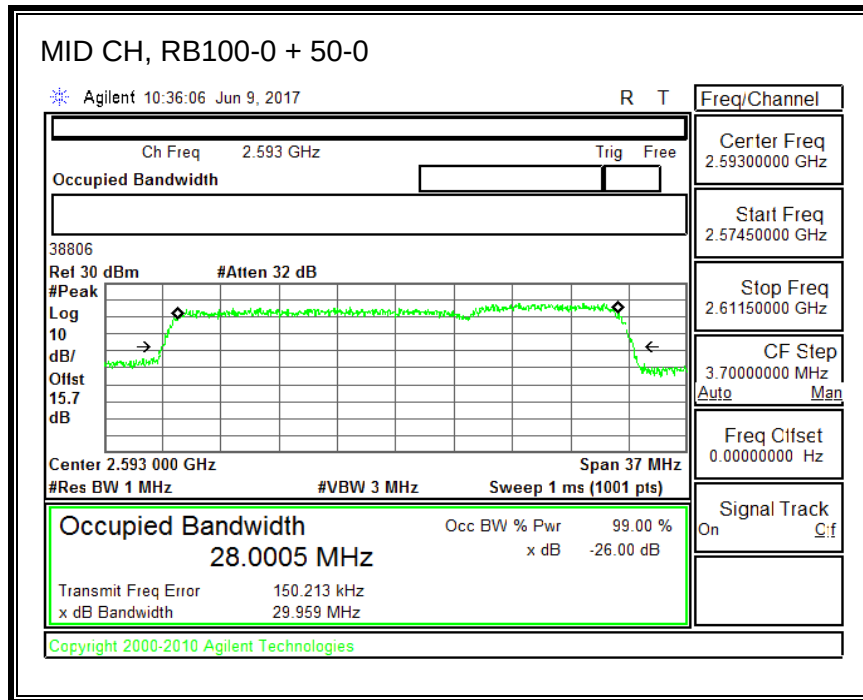

QPSK, (15.0MHz + 15.0MHz BAND WIDTH)

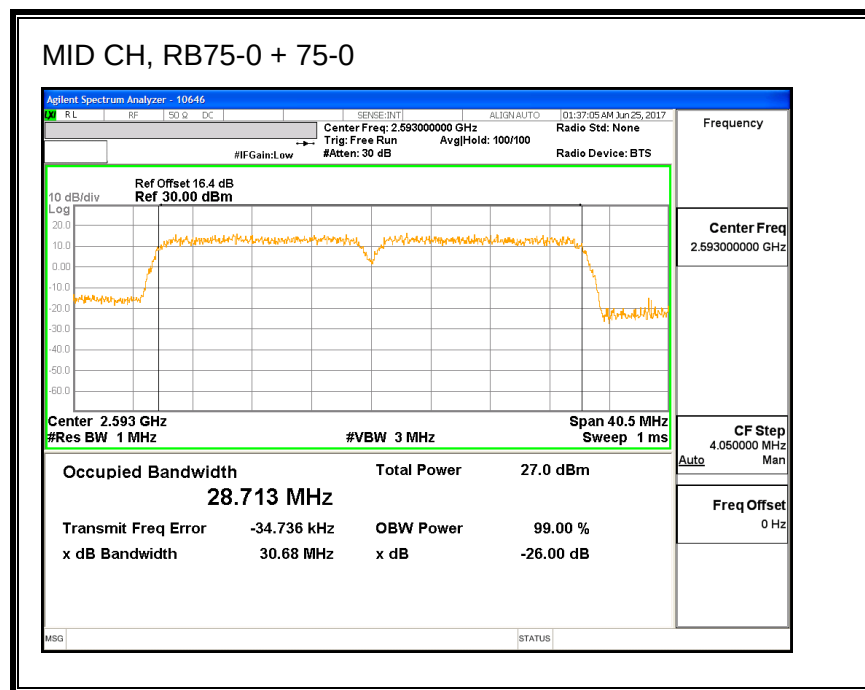

MID CH, RB75-0 + 75-0

Agilent Spectrum Analyzer - UL: 50874 \ R Date: 5/15/2017 \ CLT: 2.3

RL RF SO D DC SENSE INT ALIGN AUTO [04:37:28 PM May 18, 2017]

Center Freq 2.593000000 GHz Center Freq: 2.593000000 GHz Radio Std: None Frequency
 Trig: Free Run Avg/Hold: > 10/10
 #IF Gain: Low #Atten: 32 dB Radio Device: BTS

10 dB/div Ref 30.00 dBm

Center 2.593 GHz Span 40.5 MHz
 #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms

Occupied Bandwidth	Total Power	30.4 dBm
28.650 MHz		
Transmit Freq Error	47.751 kHz	OBW Power
x dB Bandwidth	31.53 MHz	99.00 %
		-26.00 dB

Auto

Freq Offset 0 Hz

MSG STATUS


MID CH, RB75-0 + 75-0

Agilent 10:46:11 Jun 9, 2017 R T


Ch Freq 2.593 GHz		Trig Free		Freq/Channel	
Occupied Bandwidth				Center Freq 2.59300000 GHz	
38806 Ref 30 dBm #Atten 32 dB				Start Freq 2.57275000 GHz	
				Stop Freq 2.61325000 GHz	
				CF Step 4.05000000 MHz	
				Auto Man	
				Freq Offset 0.00000000 Hz	
Center 2.593 000 0 GHz Span 40.5 MHz				Signal Track	
#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (1001 pts)				On Off	
Occupied Bandwidth 28.4840 MHz Transmit Freq Error -4.590 kHz Occ BW % Pwr 99.00 % x dB Bandwidth 30.541 MHz x dB -26.00 dB					

Copyright 2000-2010 Agilent Technologies


QPSK, (15.0MHz + 20.0MHz BAND WIDTH)

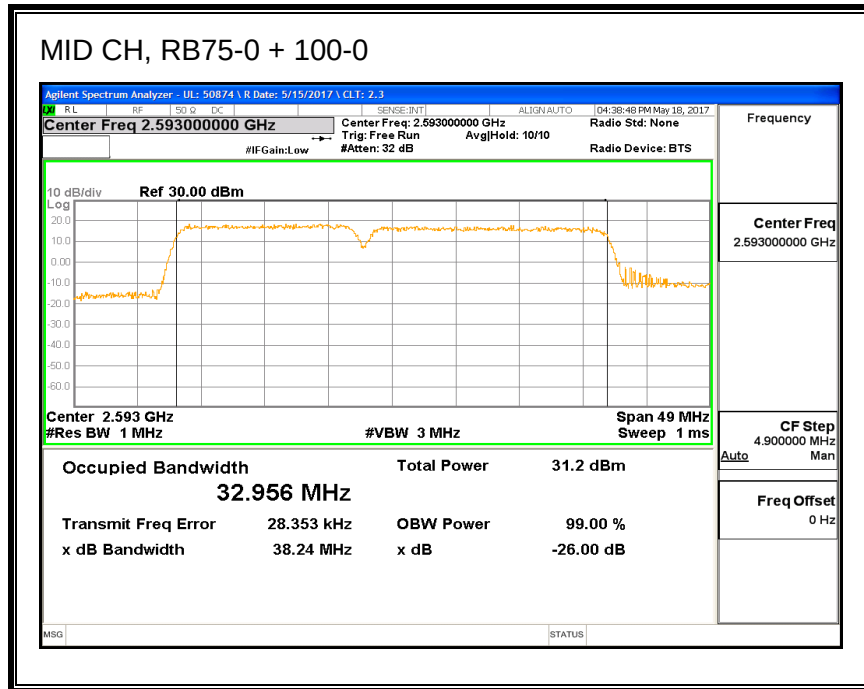


16QAM, (15.0MHz + 20.0MHz BAND WIDTH)

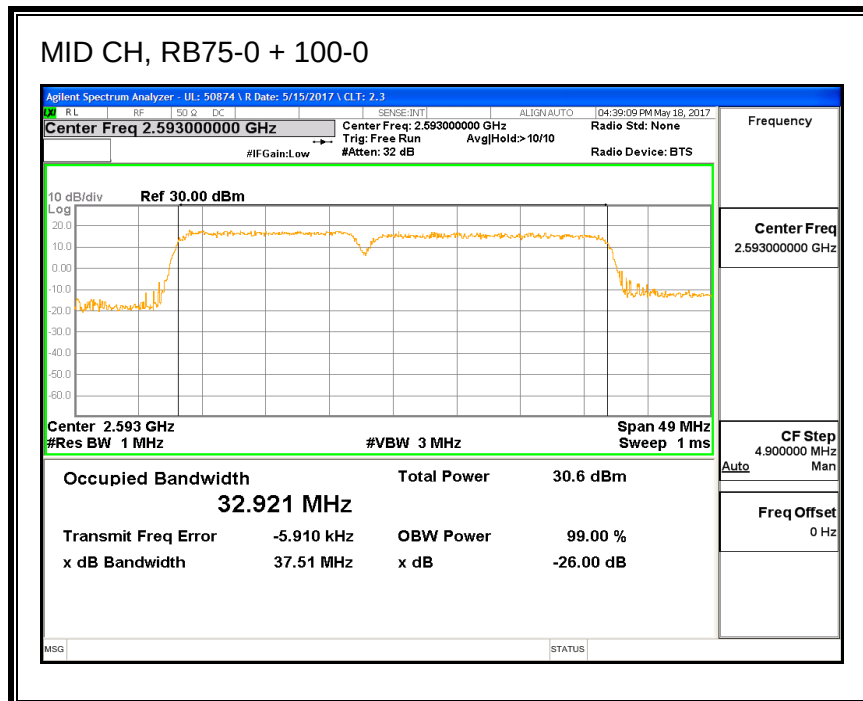


64QAM, (15.0MHz + 20.0MHz BAND WIDTH)

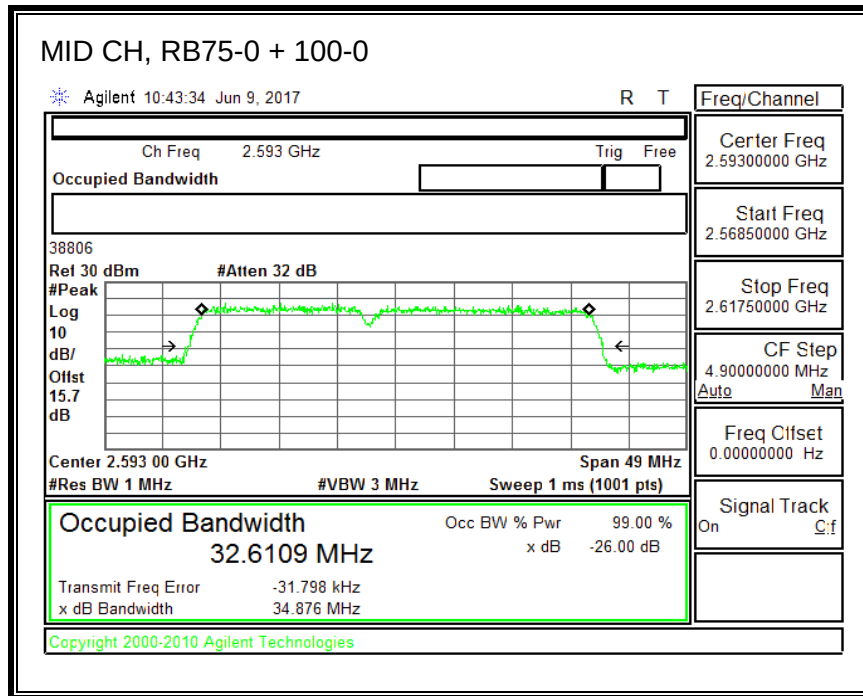


QPSK, (20.0MHz + 15.0MHz BAND WIDTH)

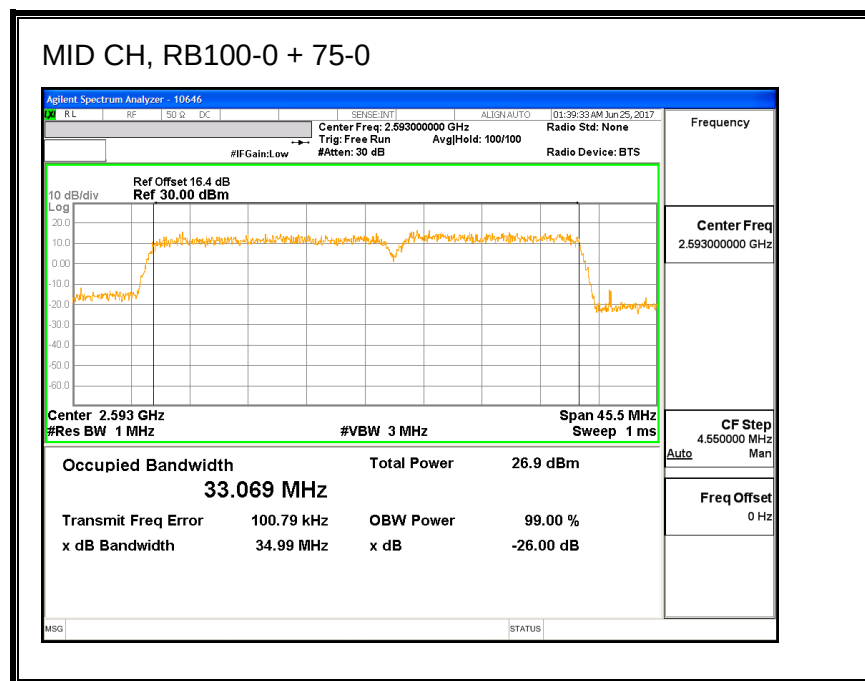

16QAM, (20.0MHz + 15.0MHz BAND WIDTH)

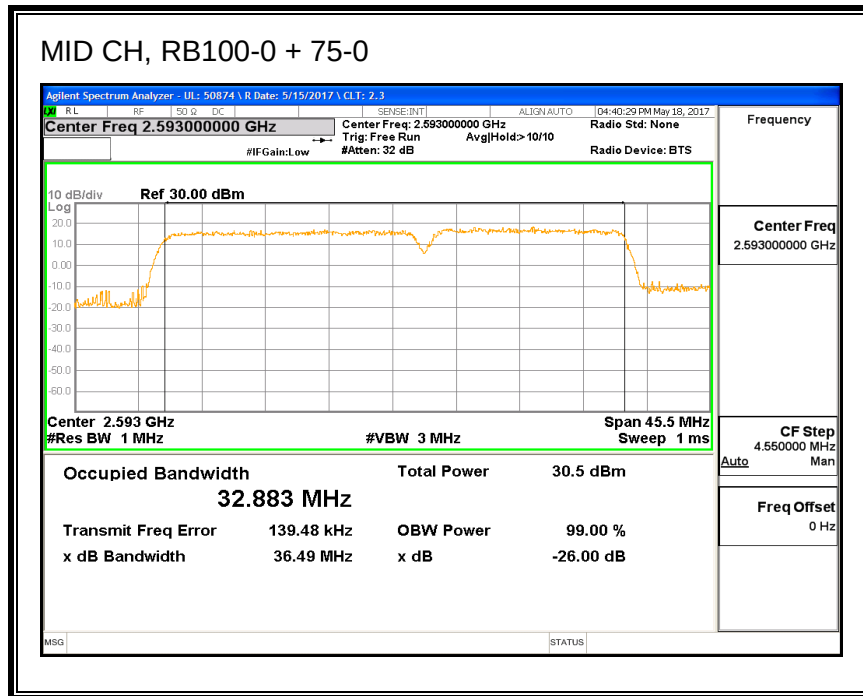

64QAM, (20.0MHz + 15.0MHz BAND WIDTH)

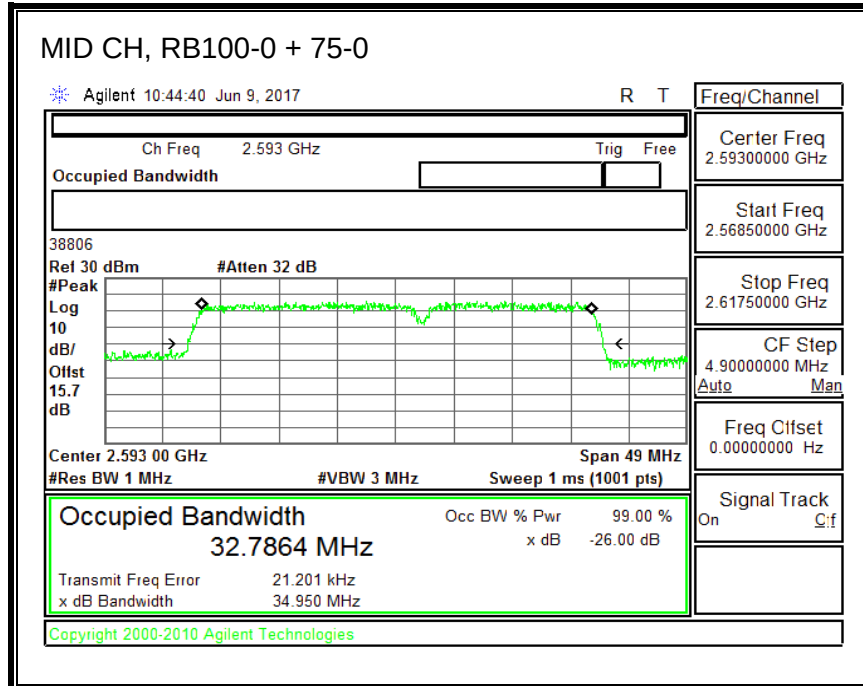

8.2. EMISSION MASK

RULE PART(S)

FCC: §2.1051, §27.53

LIMITS

FCC: §27.53

(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

TEST PROCEDURE FOR FCC PART 27

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

Set resolution bandwidth to at least 1% of emission bandwidth.



MODES TESTED



- LTE Band 7
- LTE Band 41

RESULTS



8.2.1. LTE BAND 7



QPSK, (20.0 MHz + 10.0 MHz BAND WIDTH)

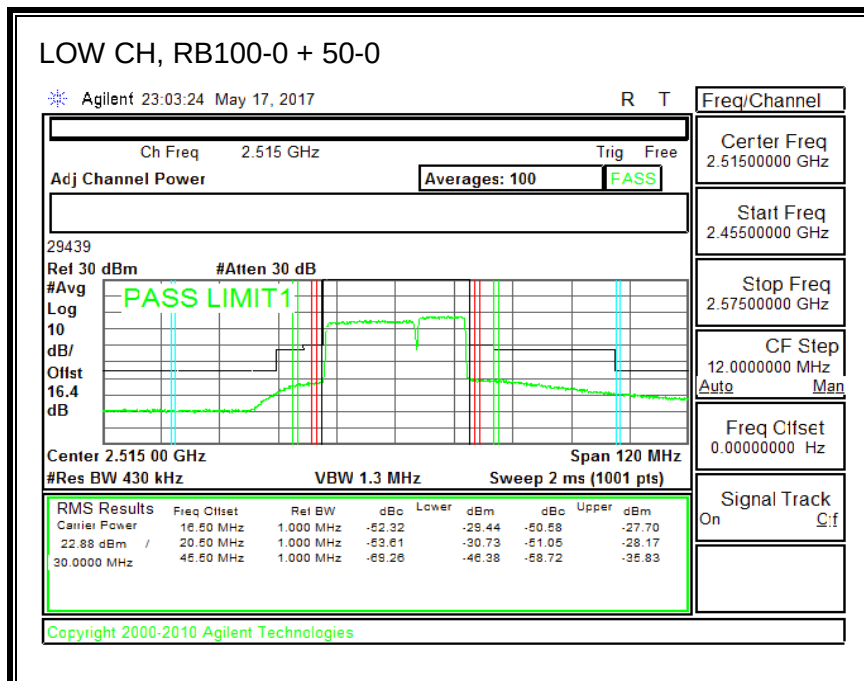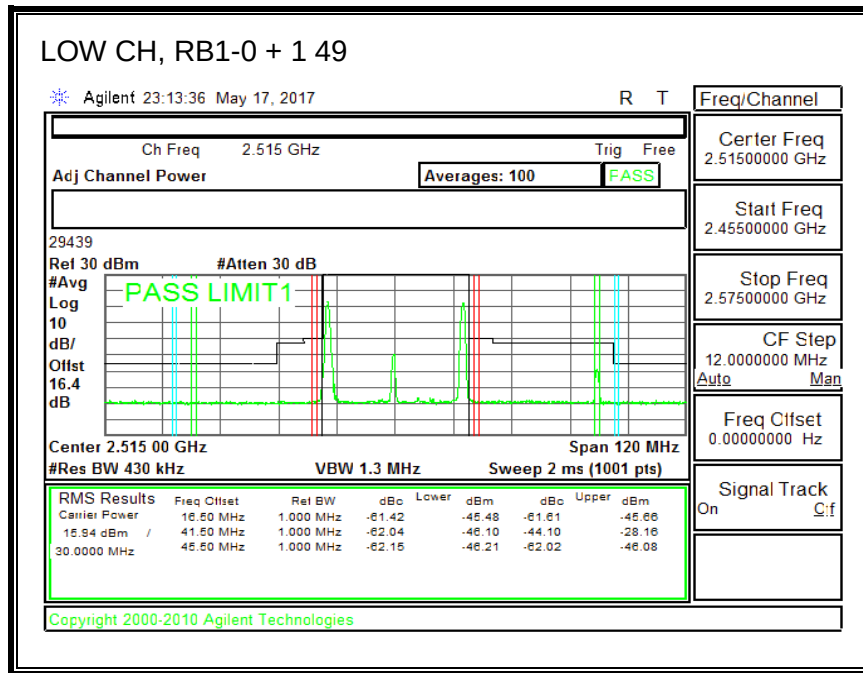

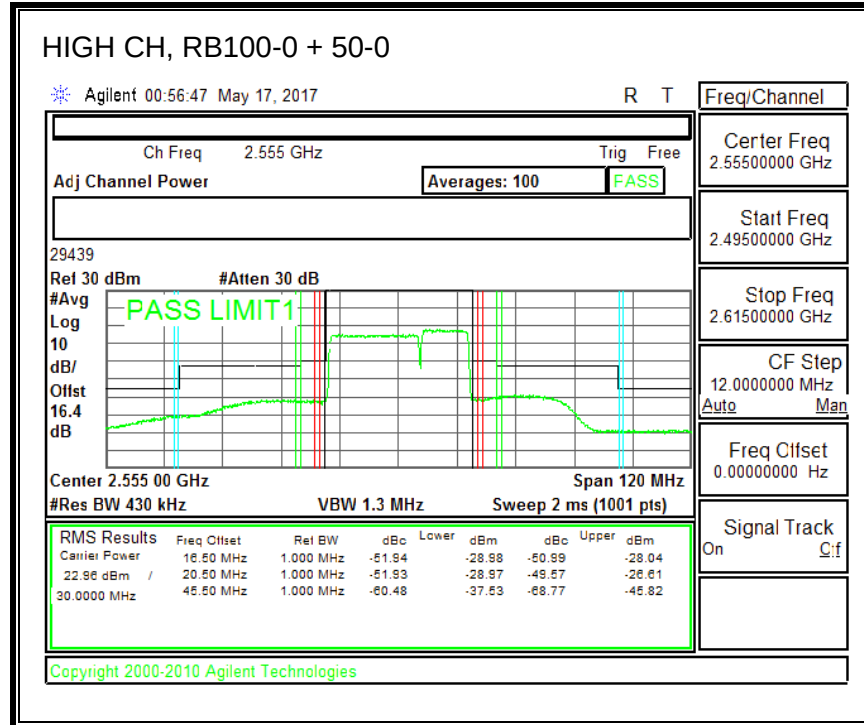
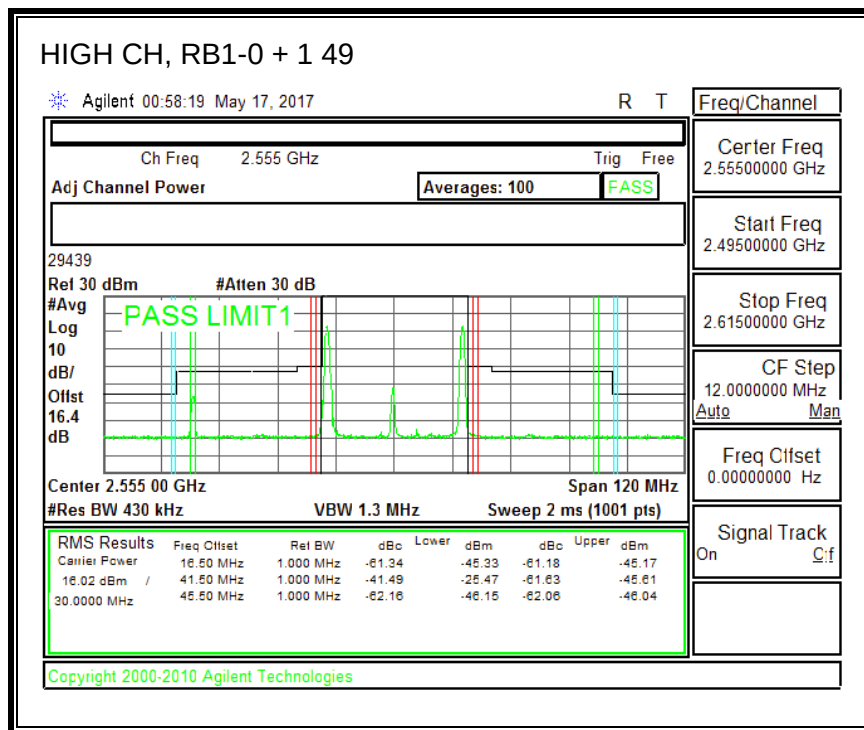




16QAM (20.0 MHz + 10.0 MHz BAND WIDTH)

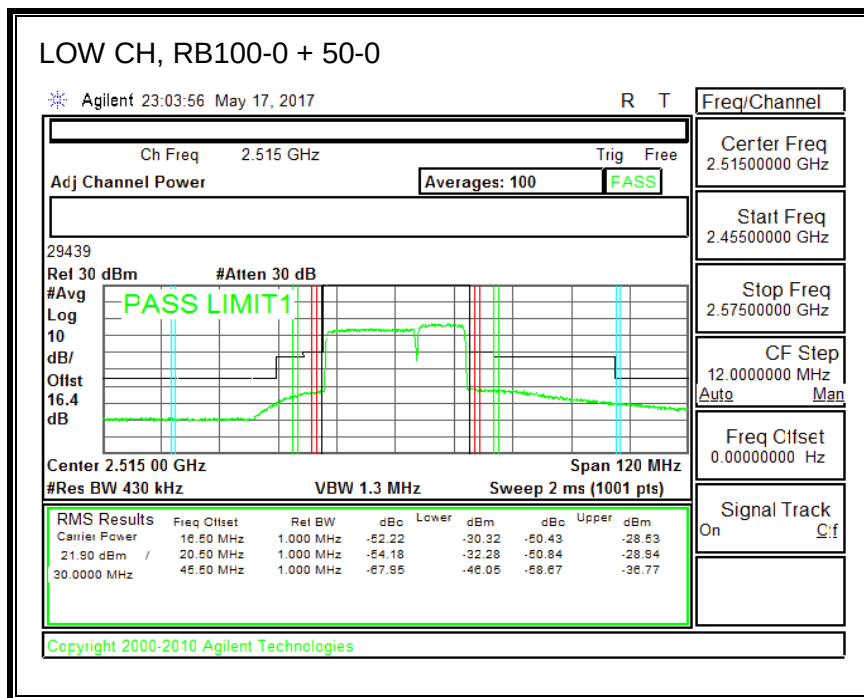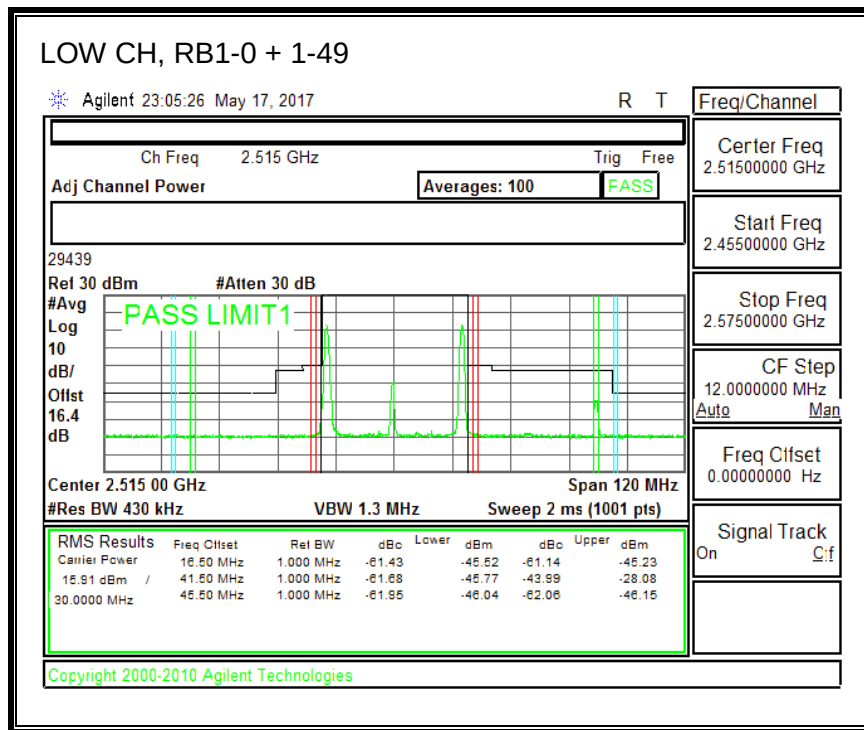

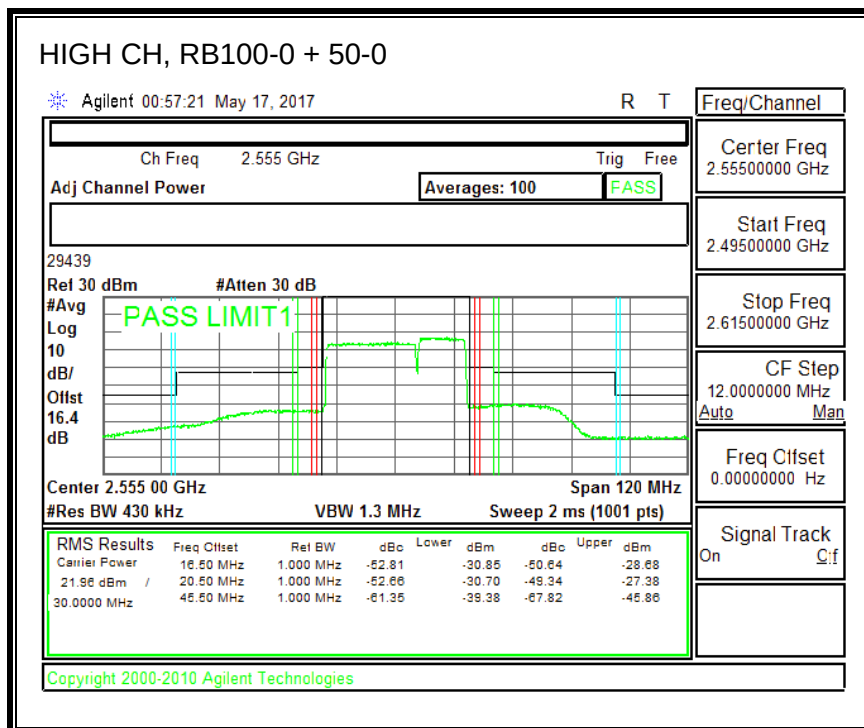
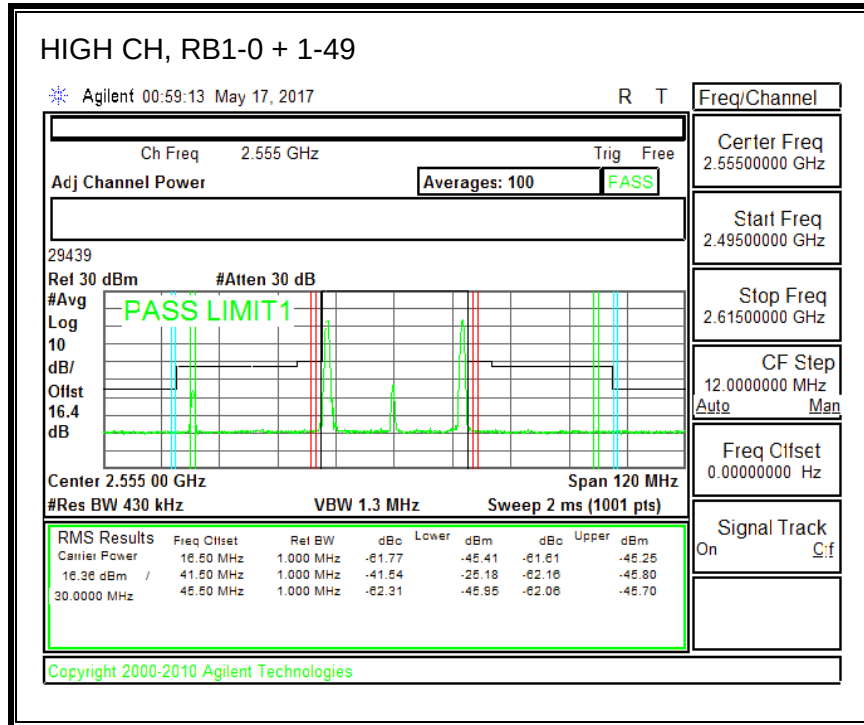




QPSK, (20.0 MHz + 20.0 MHz BAND WIDTH)

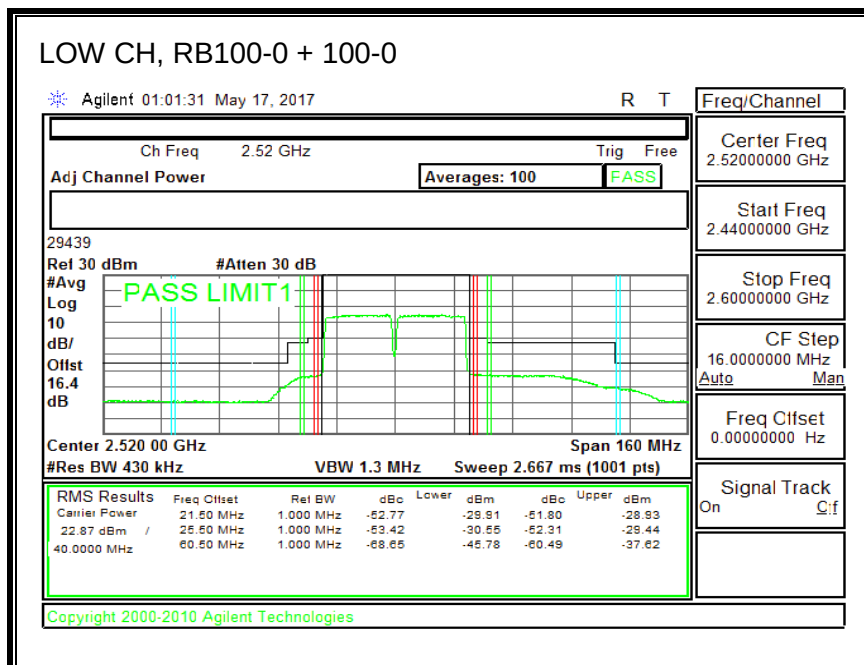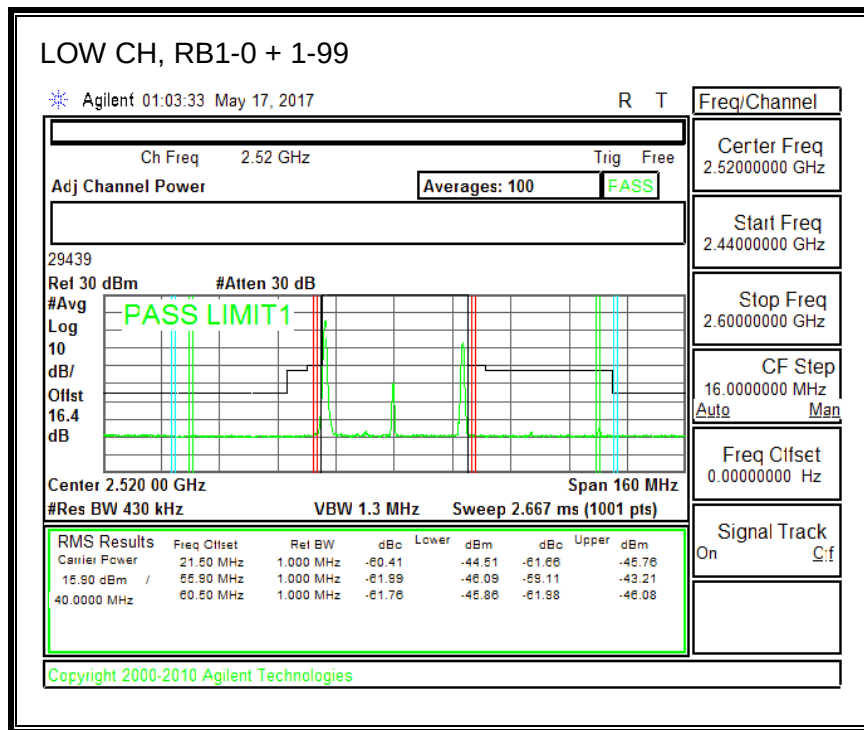

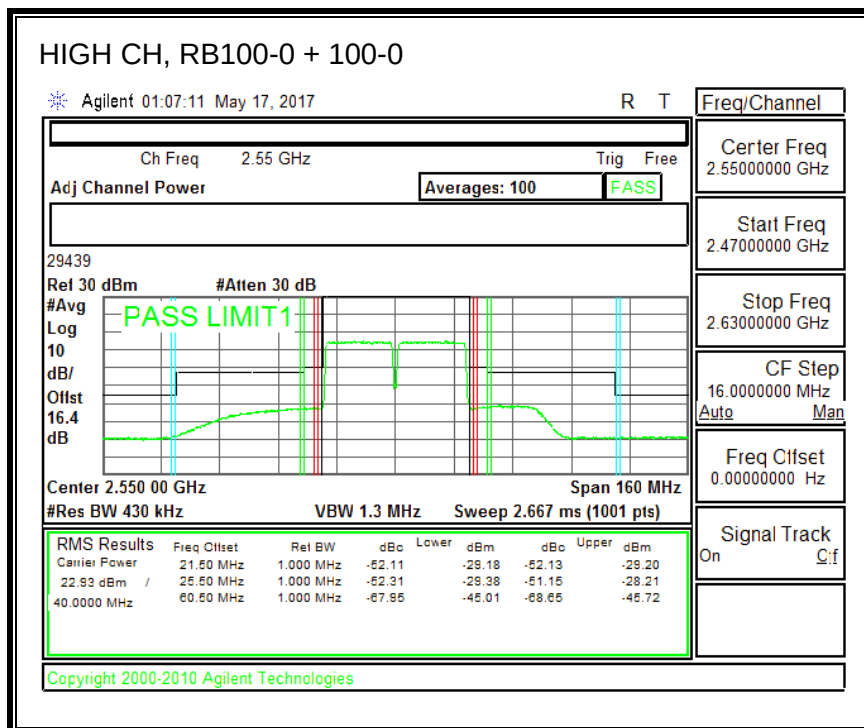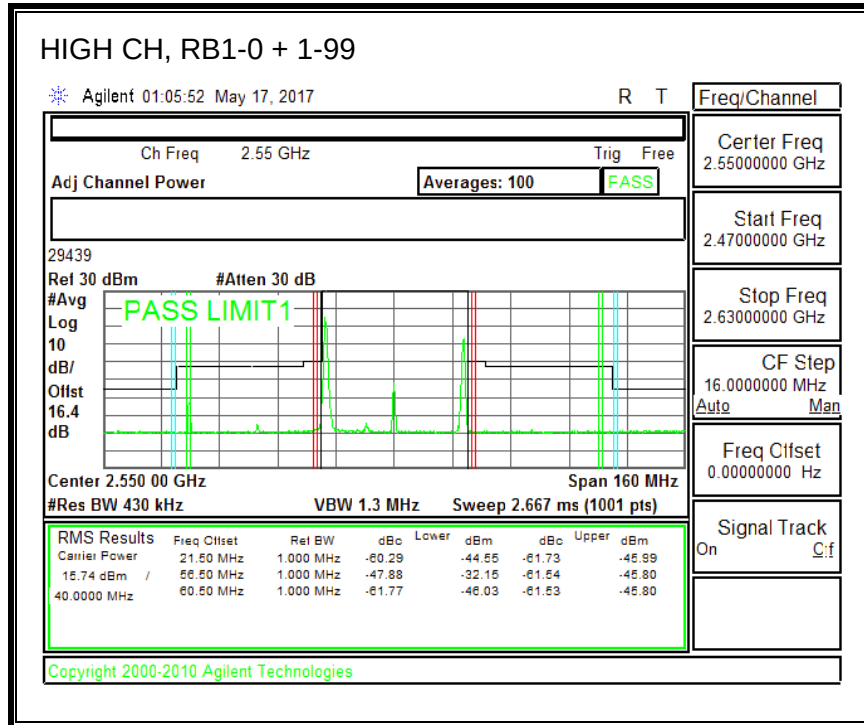



16QAM (20.0 MHz + 20.0 MHz BAND WIDTH)

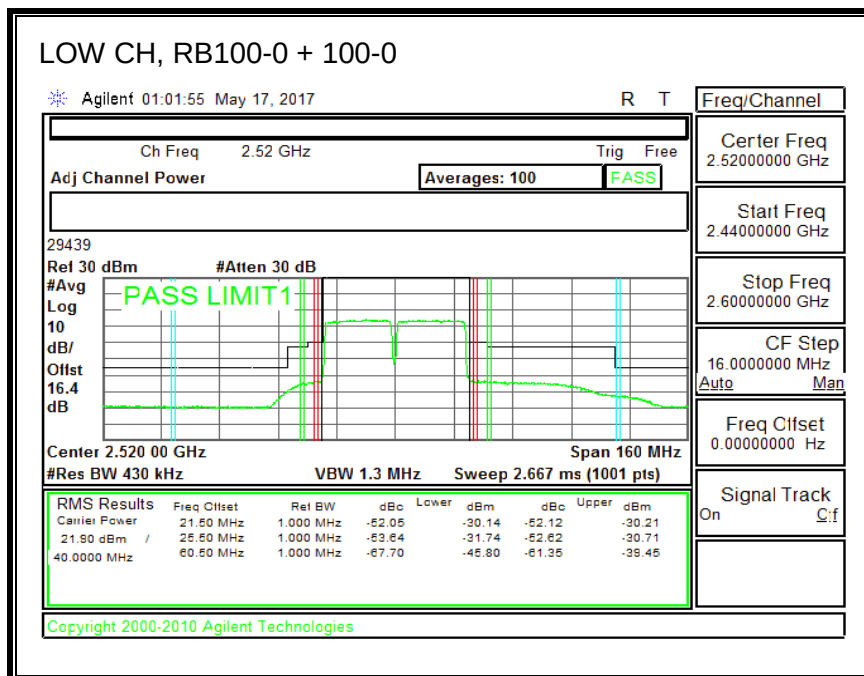
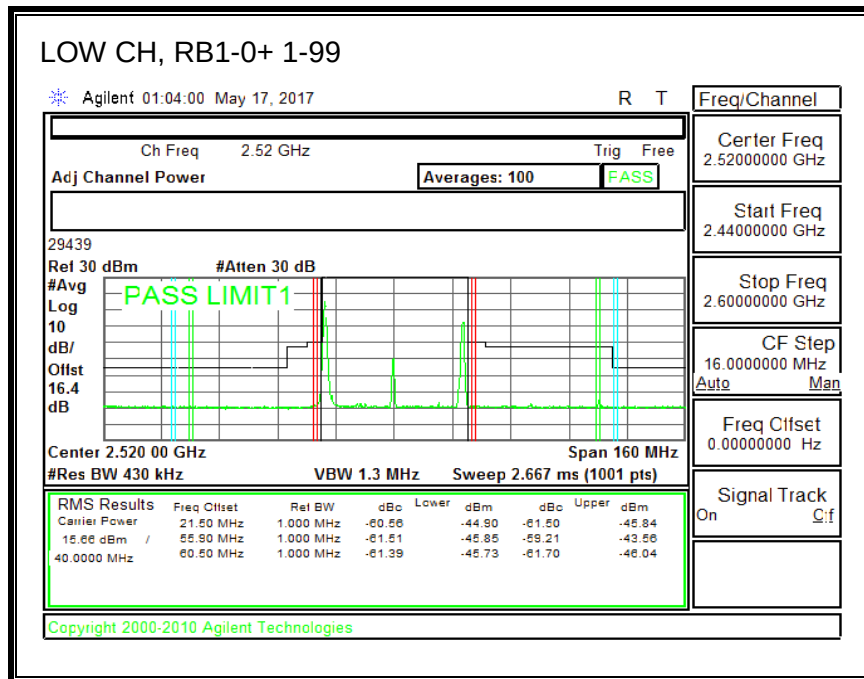


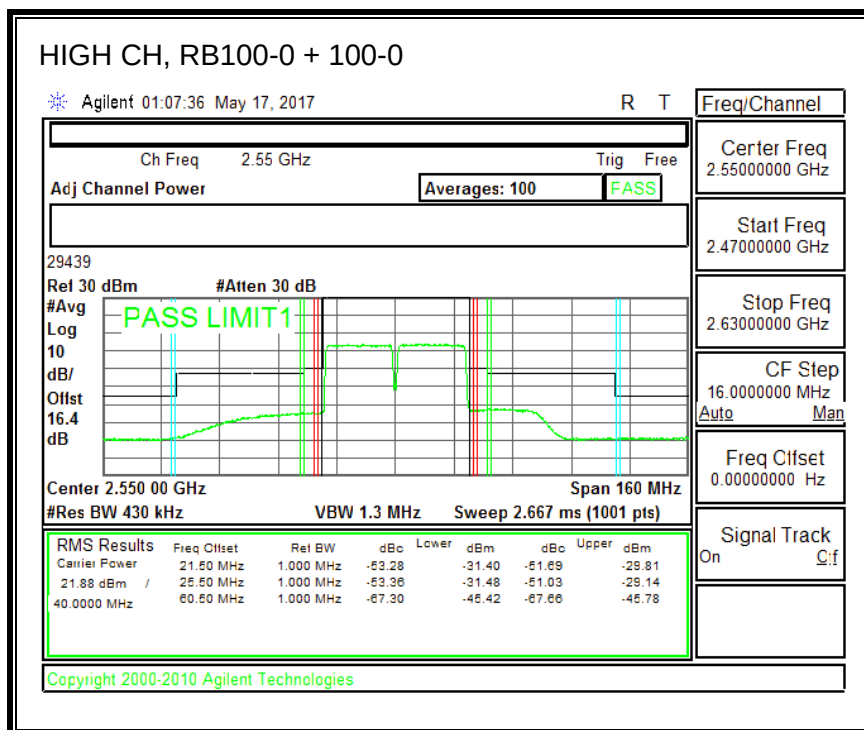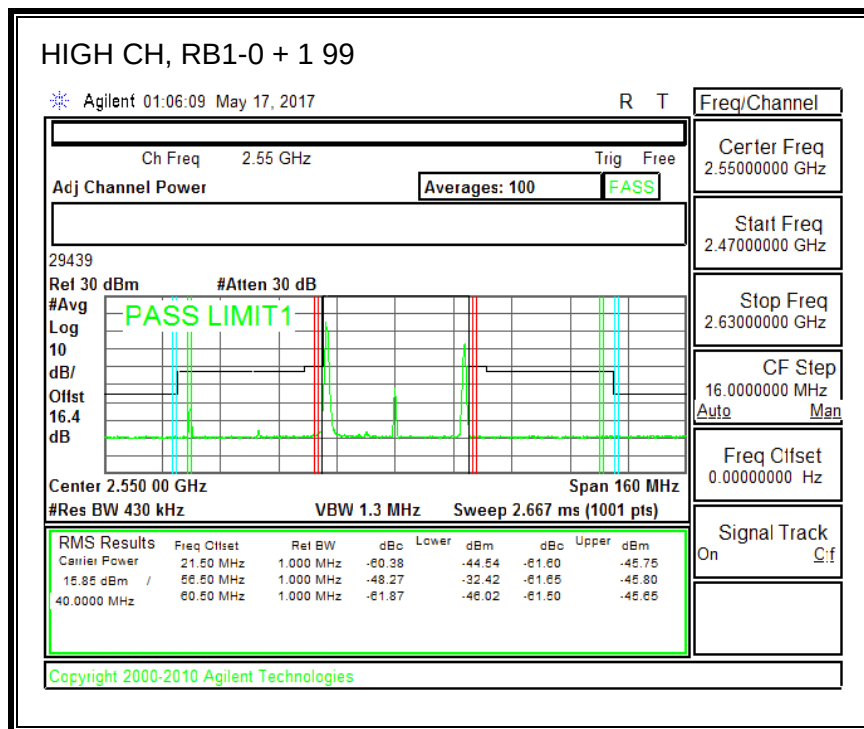



8.2.2. LTE BAND 41



QPSK, (20.0 MHz + 5.0 MHz BAND WIDTH)

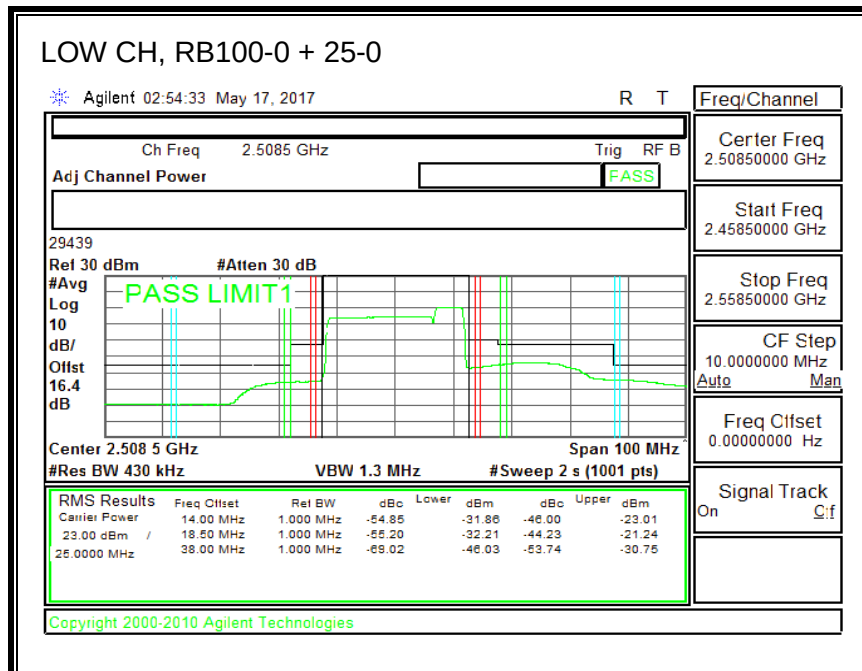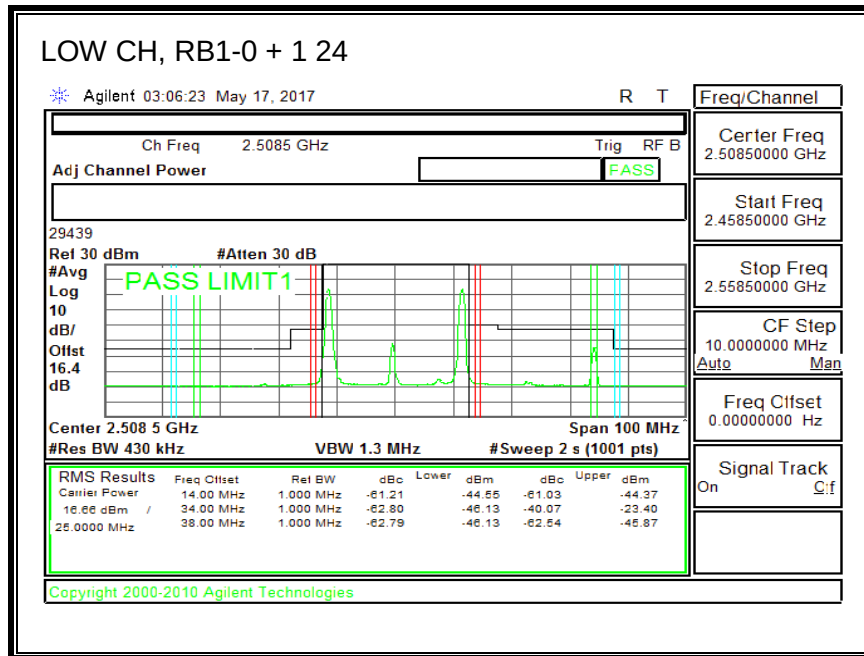

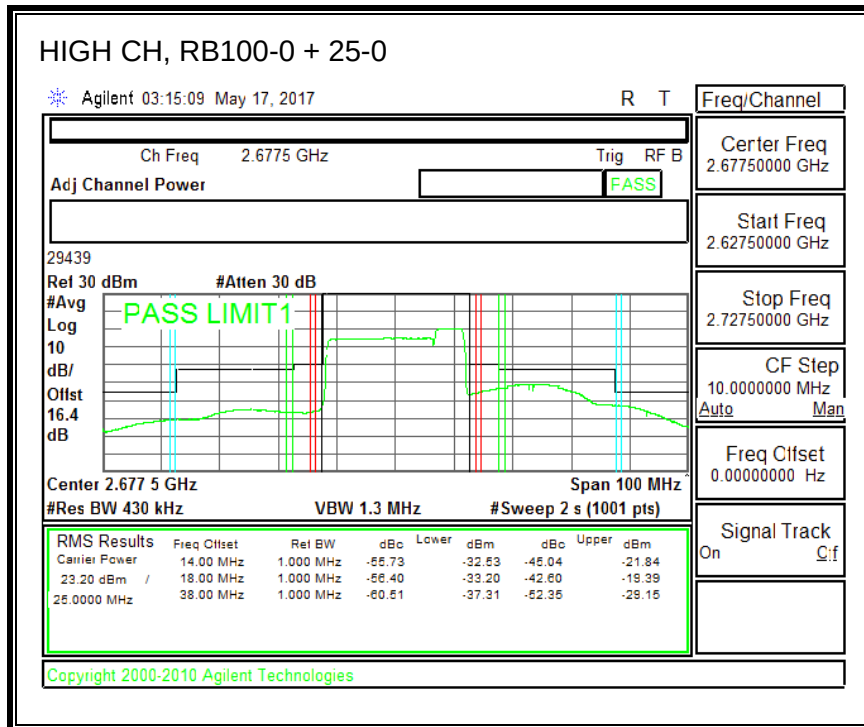
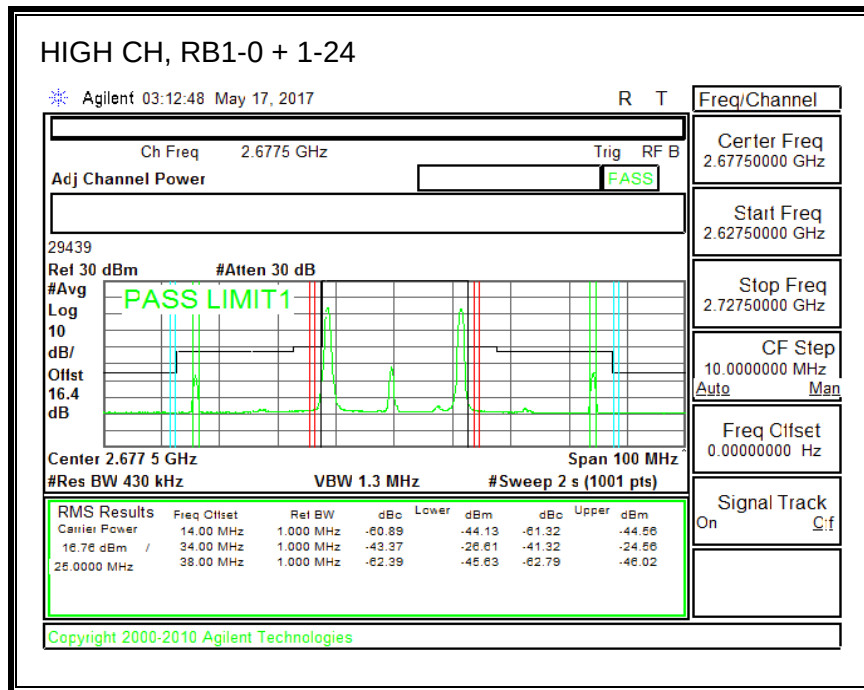




16QAM (20.0 MHz + 5.0 MHz BAND WIDTH)

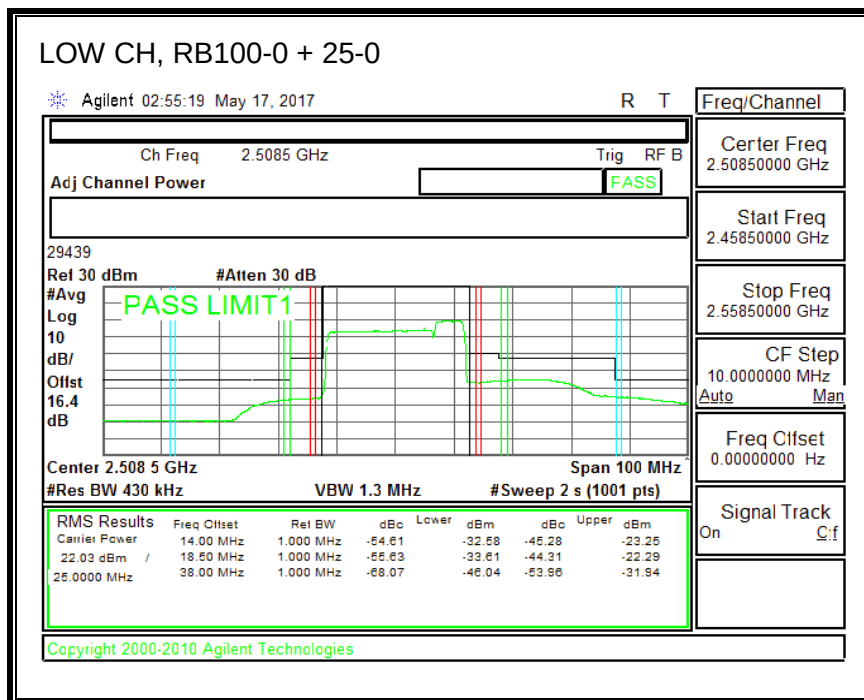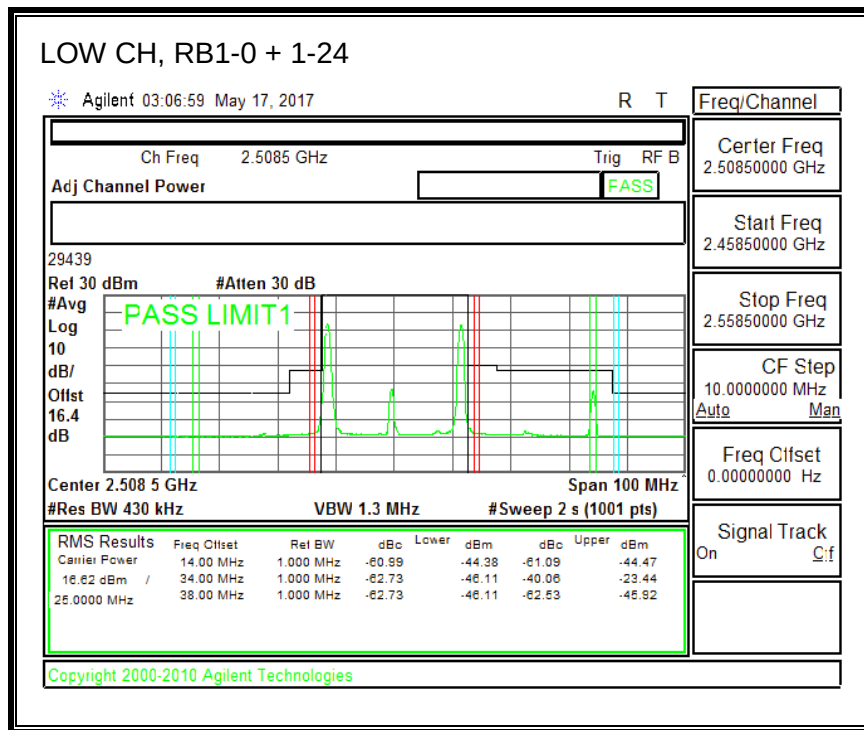

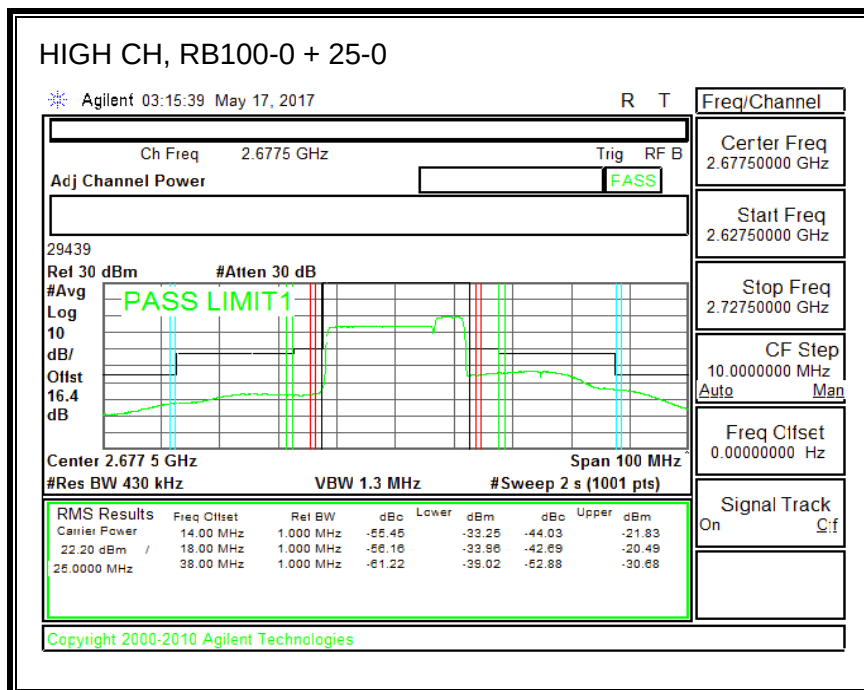
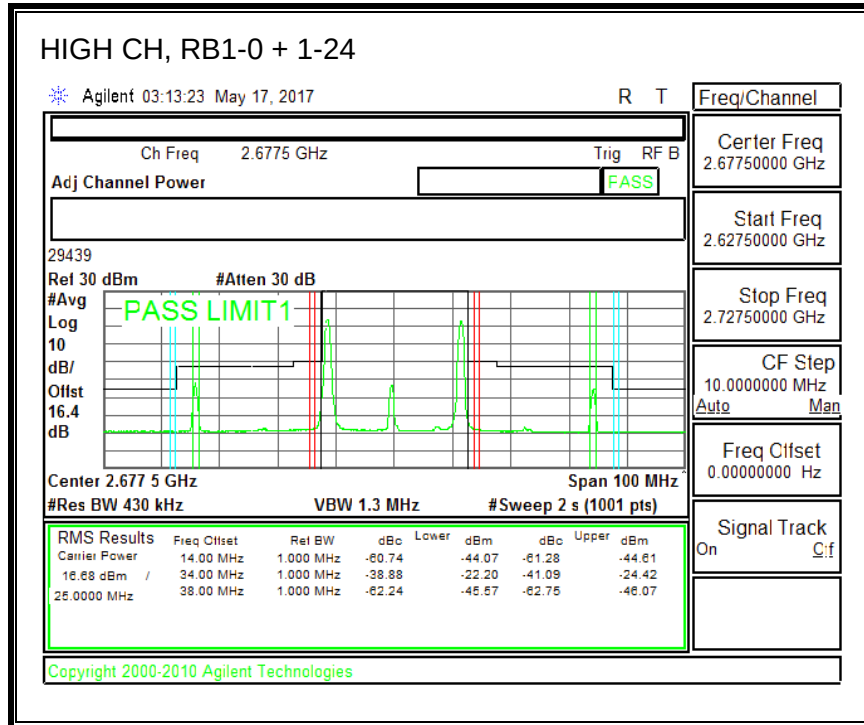




QPSK, (20.0 MHz + 20.0 MHz BAND WIDTH)

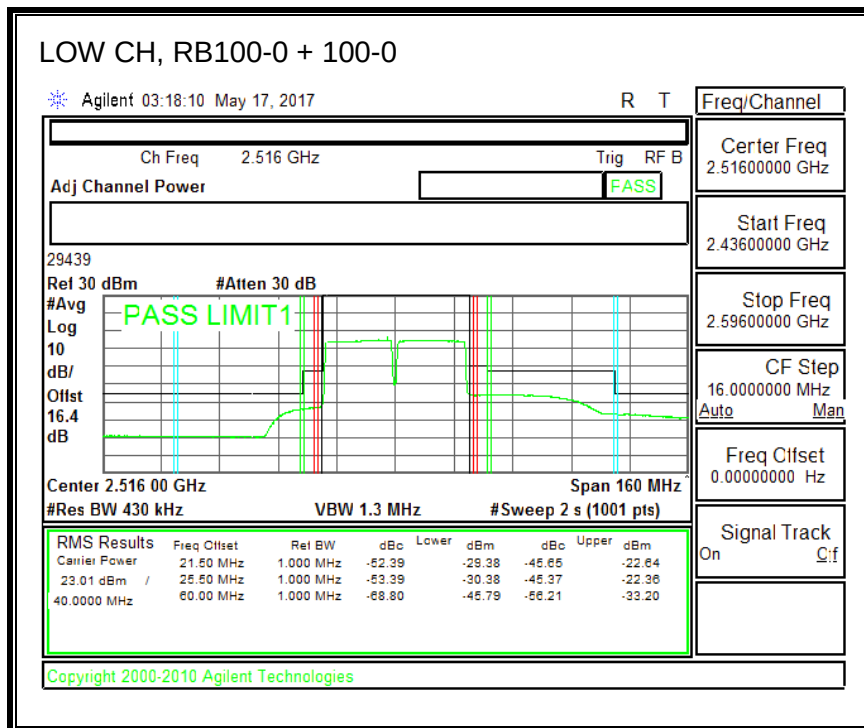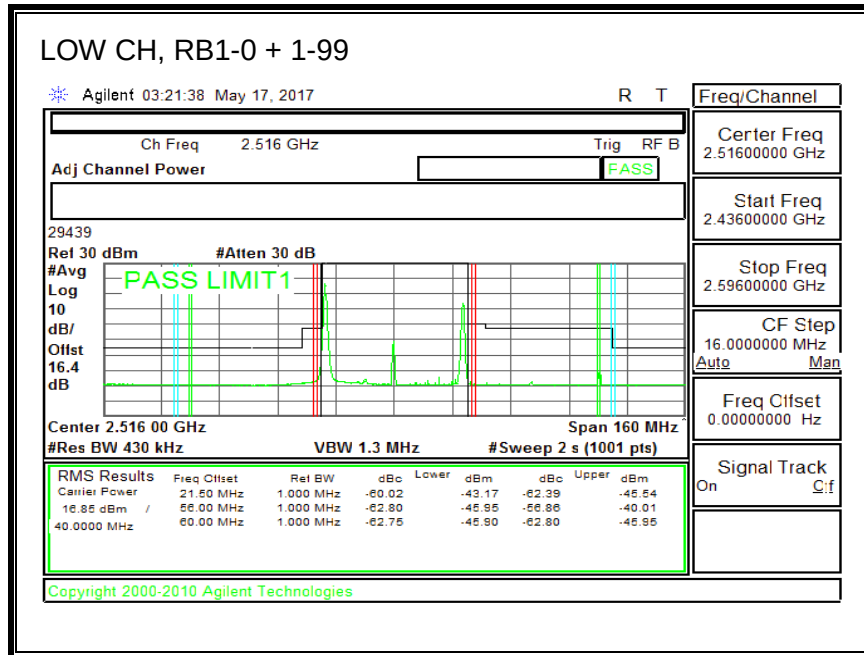

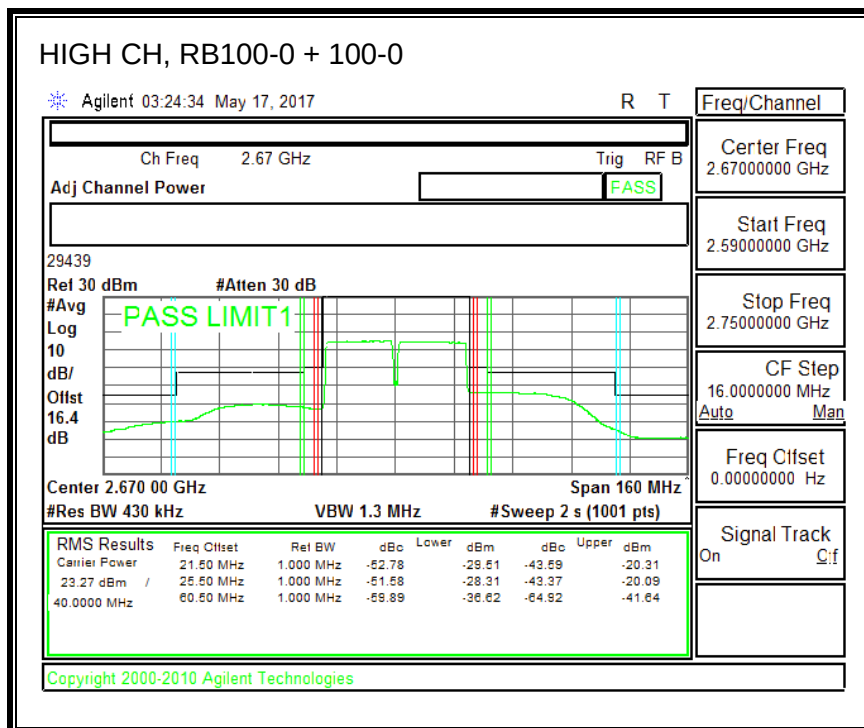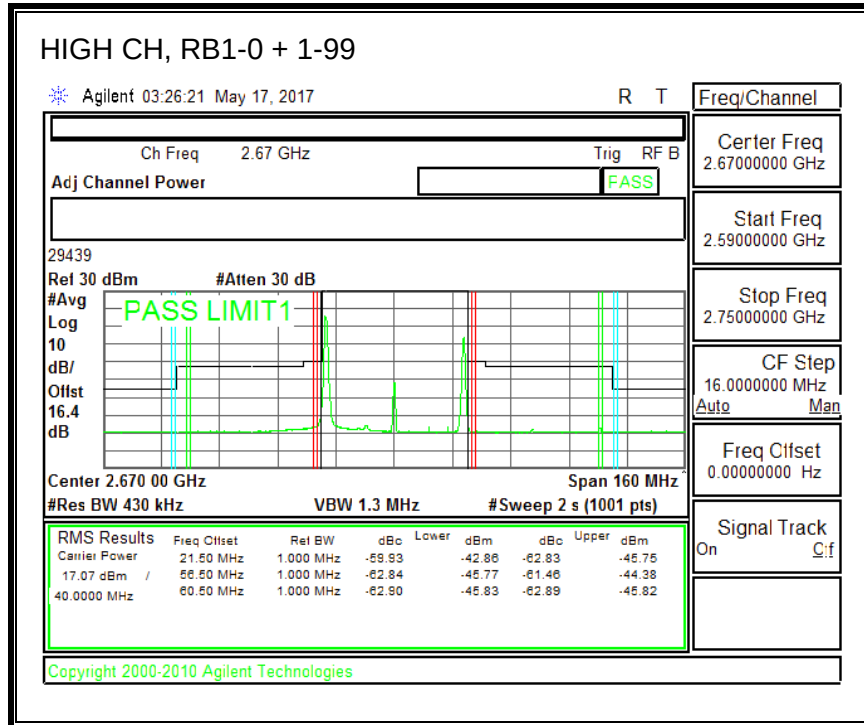

16QAM (20.0 MHz + 20.0 MHz BAND WIDTH)

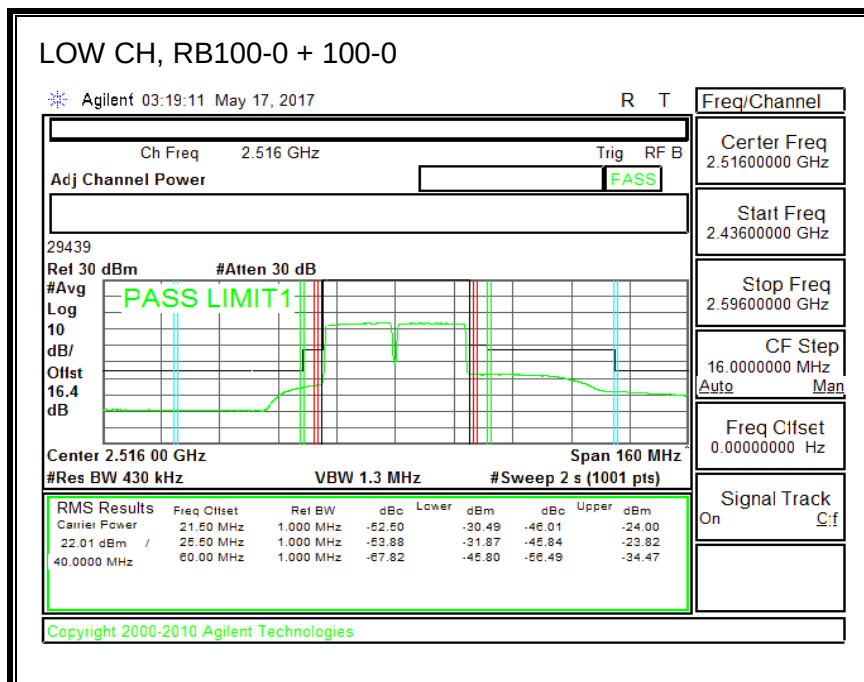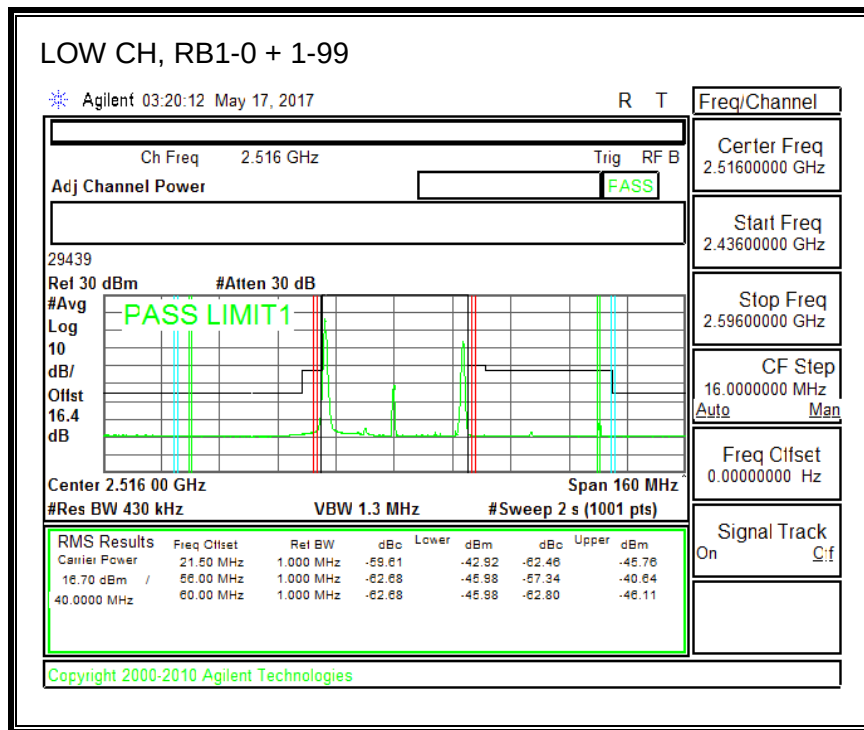

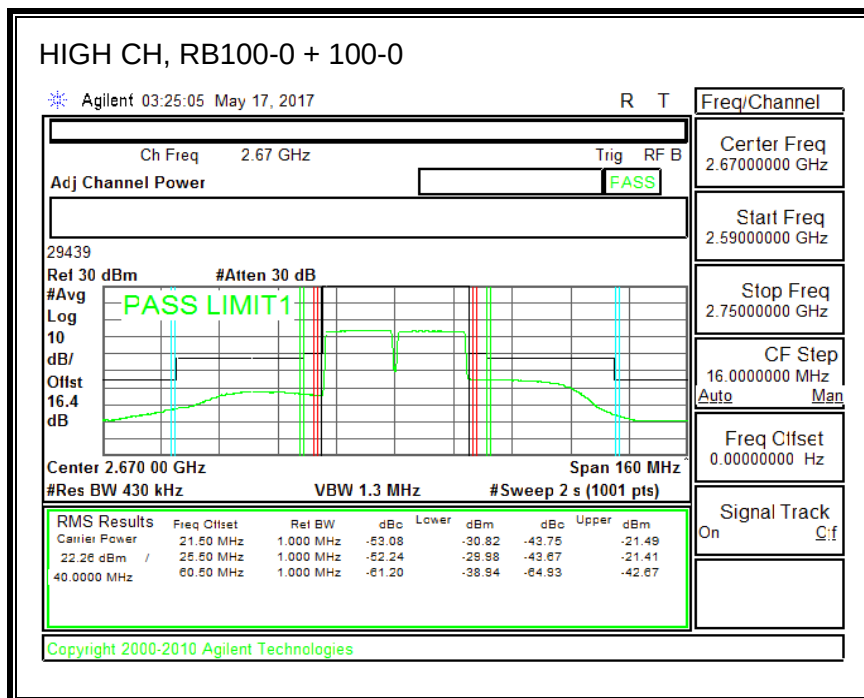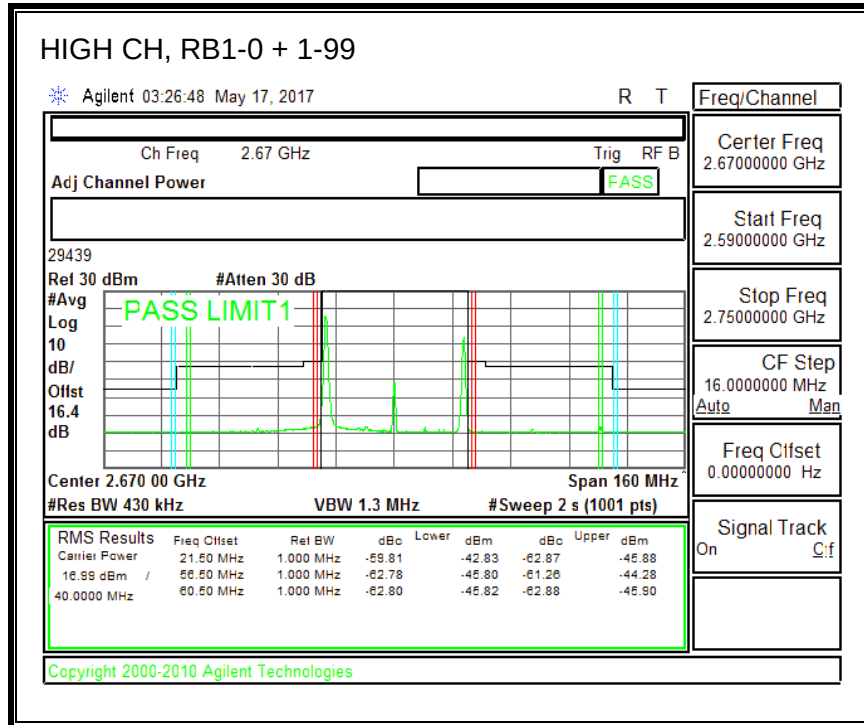

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:



- Set display line at -25 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz. (NOTE: Worst case set RBW/VBW to 1MHz/3MHz)

MODES TESTED


- LTE Band 7
- LTE Band 41

8.3.1. LTE BAND 7

QPSK, (20.0 MHz+ 10.0 MHz BAND WIDTH)

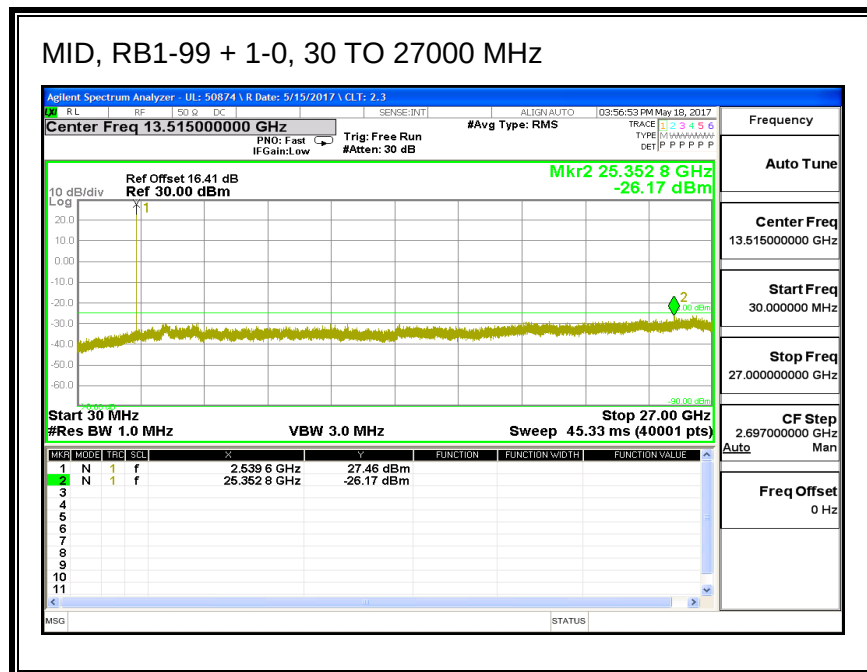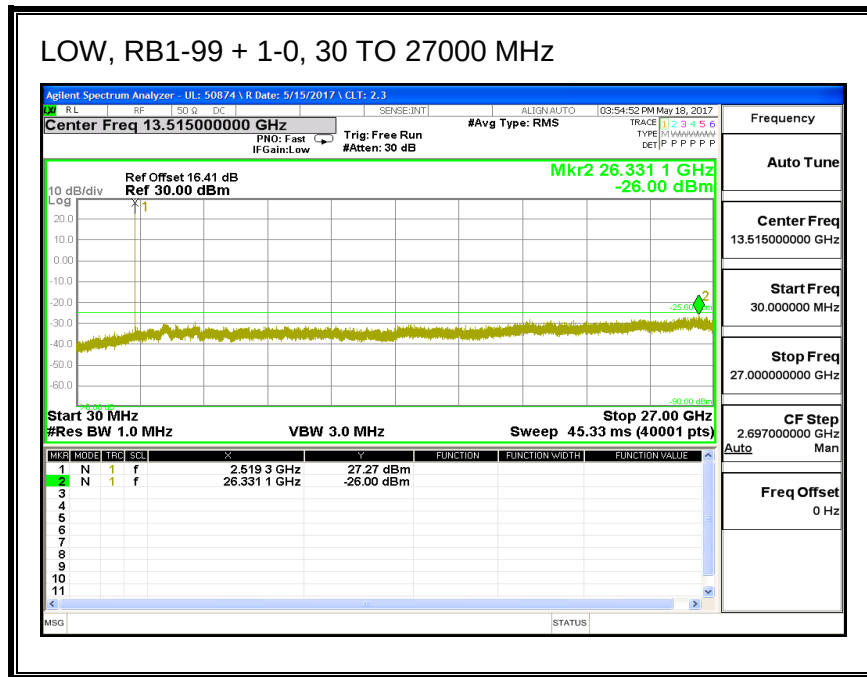


HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

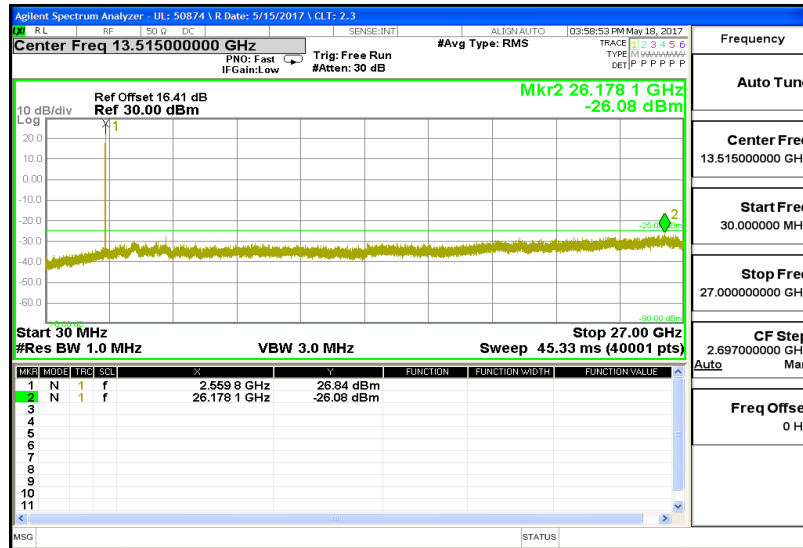


16QAM, (20.0 MHz+ 10.0 MHz BAND WIDTH)


LOW, RB1-99 + 1-0, 30 TO 27000 MHz

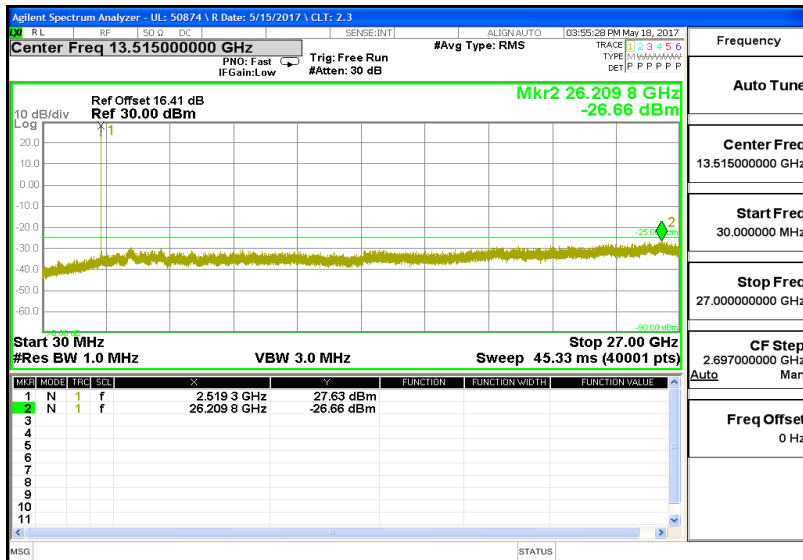



MID, RB1-99 + 1-0, 30 TO 27000 MHz

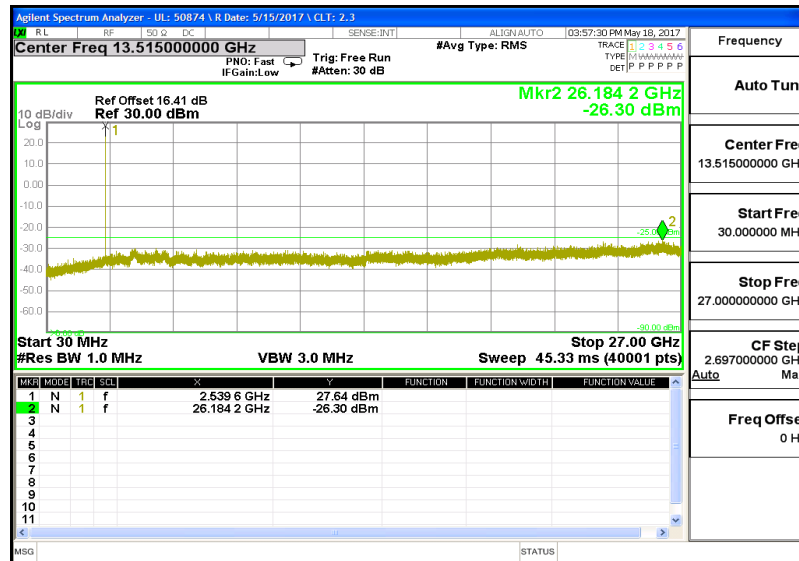


HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

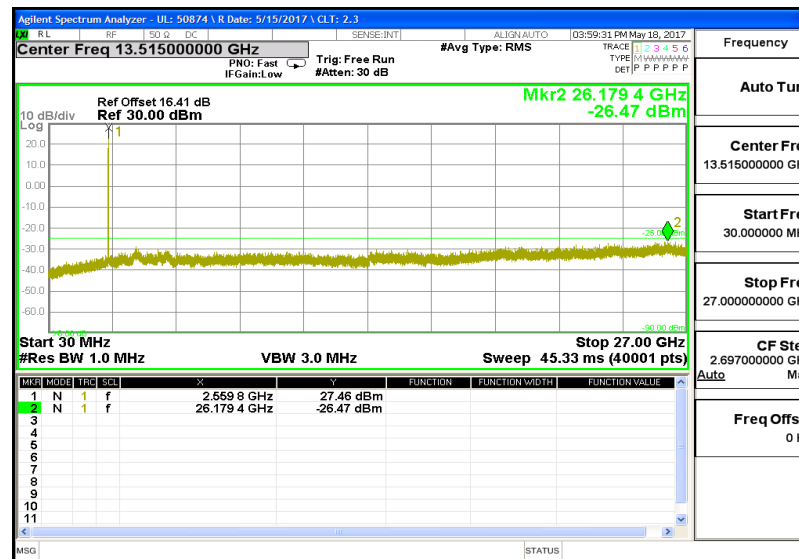


QPSK, (20.0 MHz+ 20.0 MHz BAND WIDTH)

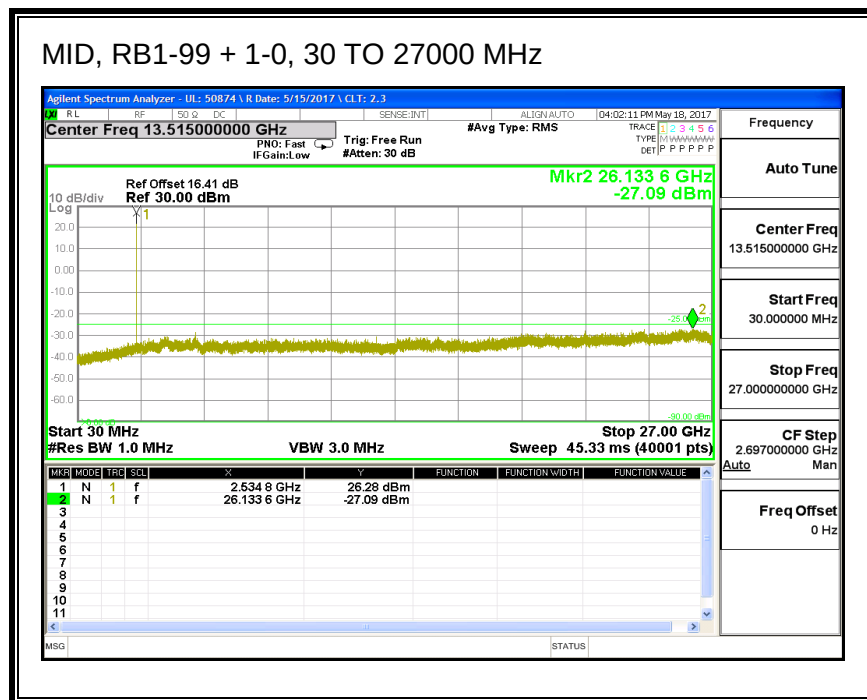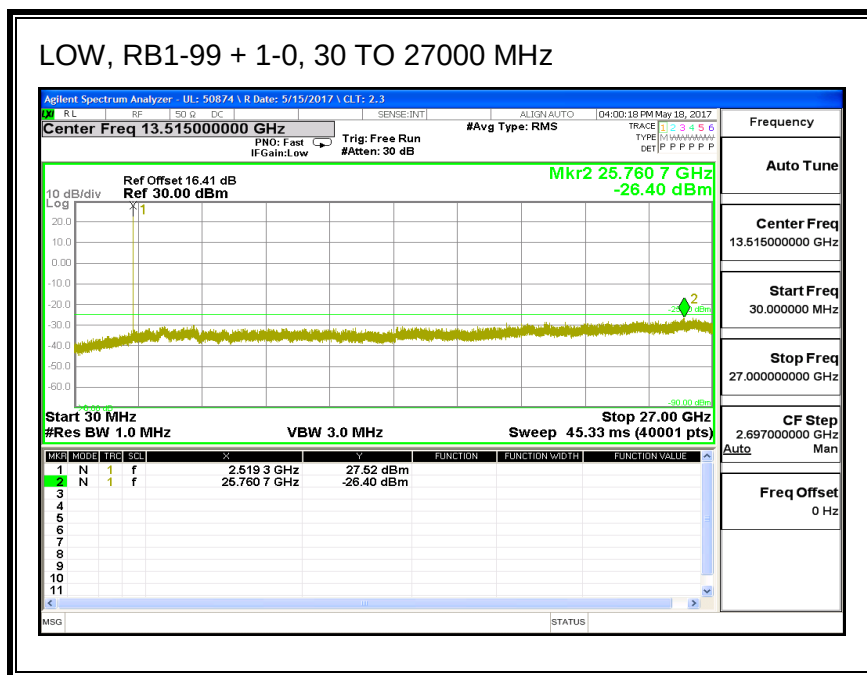


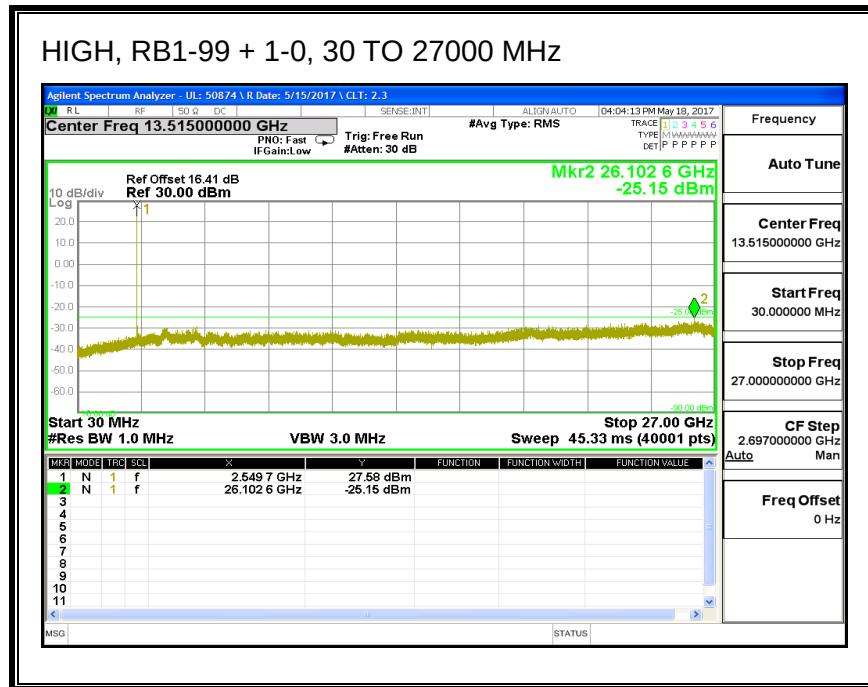


16QAM, (20.0 MHz+ 20.0 MHz BAND WIDTH)

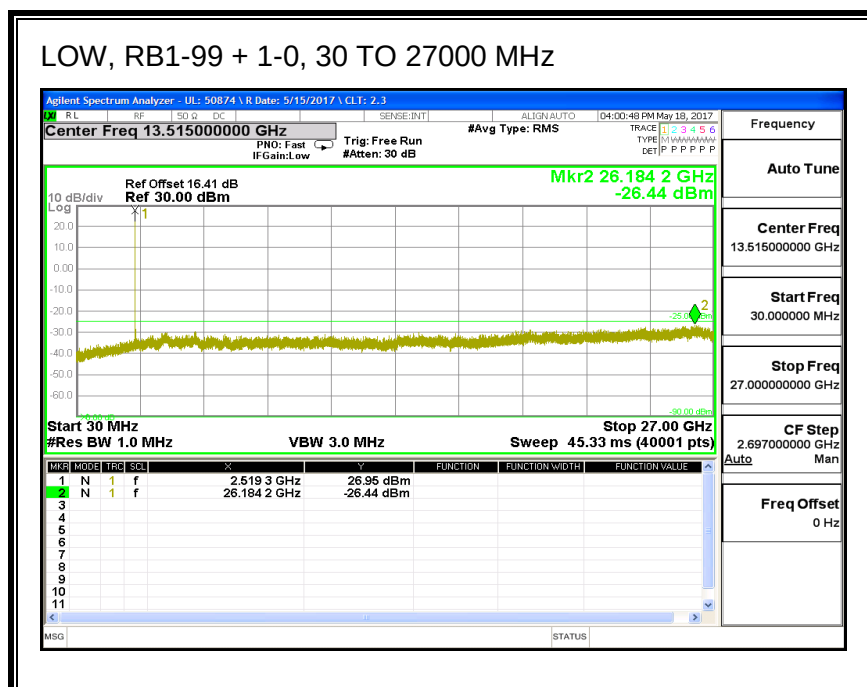

MID, RB1-99 + 1-0, 30 TO 27000 MHz


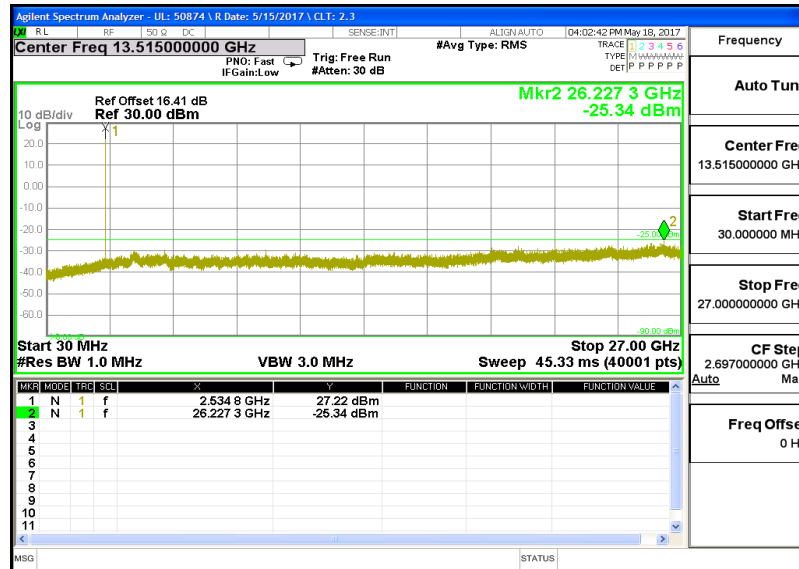



HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

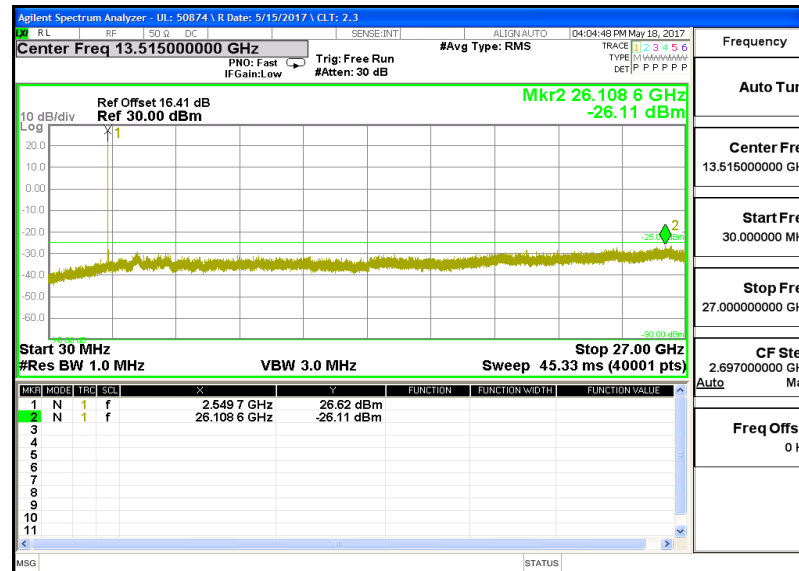


8.3.2. LTE BAND 41

QPSK, (20.0 MHz+ 5.0 MHz BAND WIDTH)

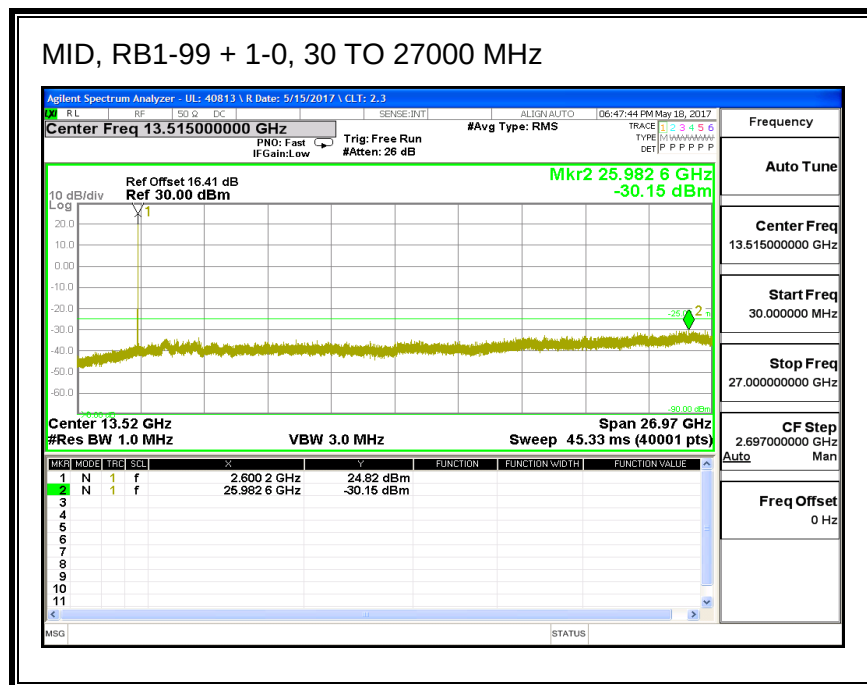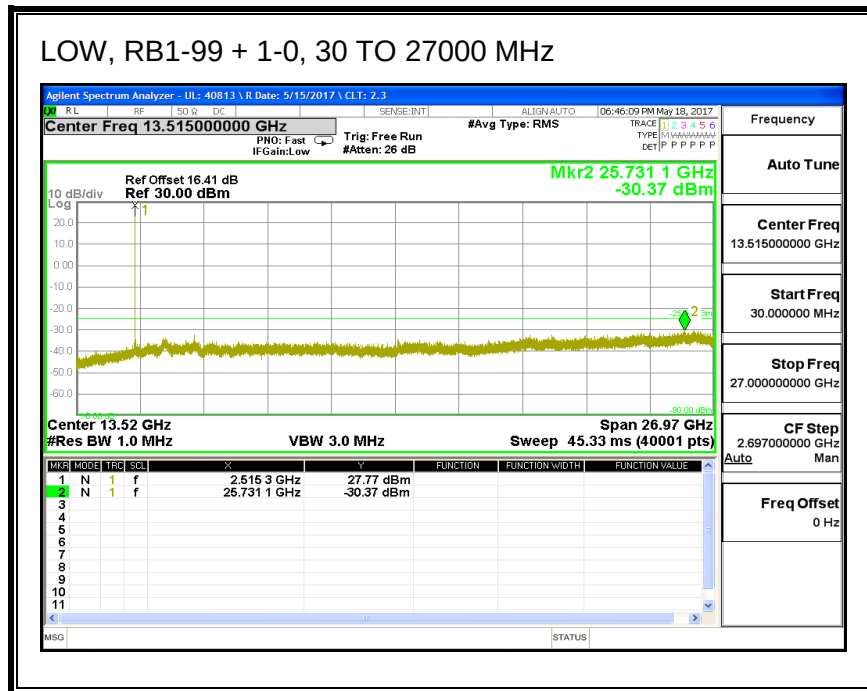


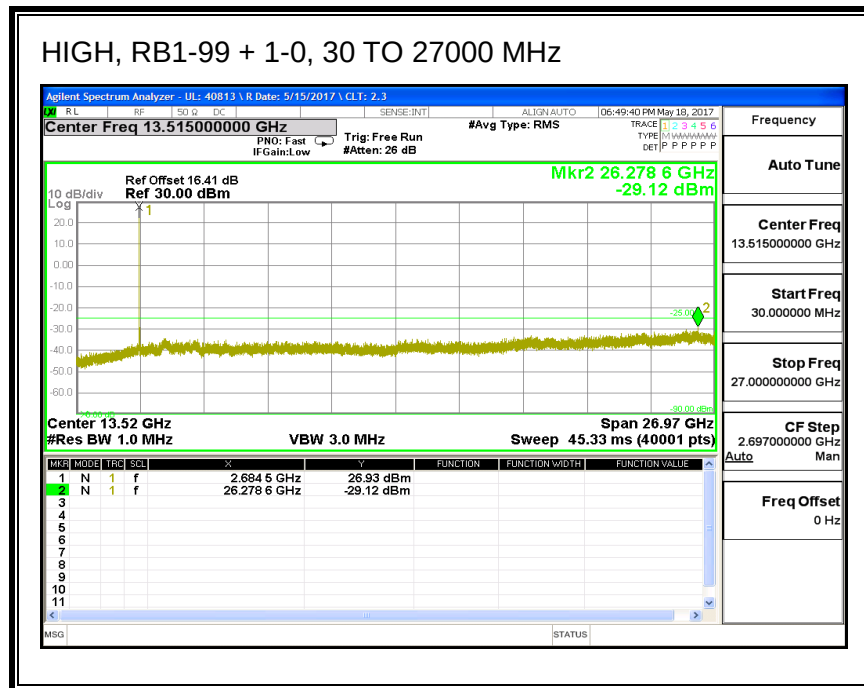


16QAM, (20.0 MHz+ 5.0 MHz BAND WIDTH)

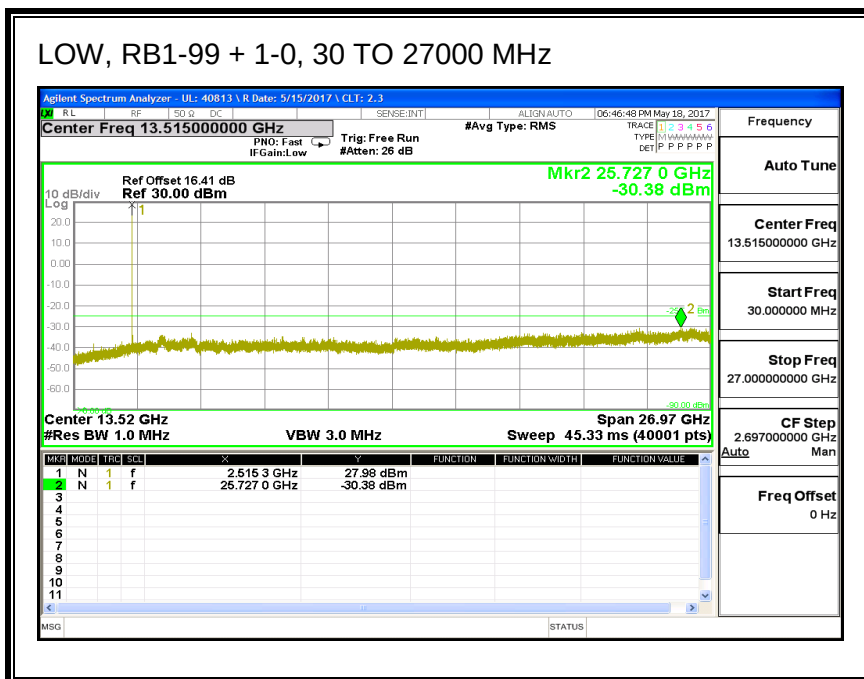

MID, RB1-99 + 1-0, 30 TO 27000 MHz

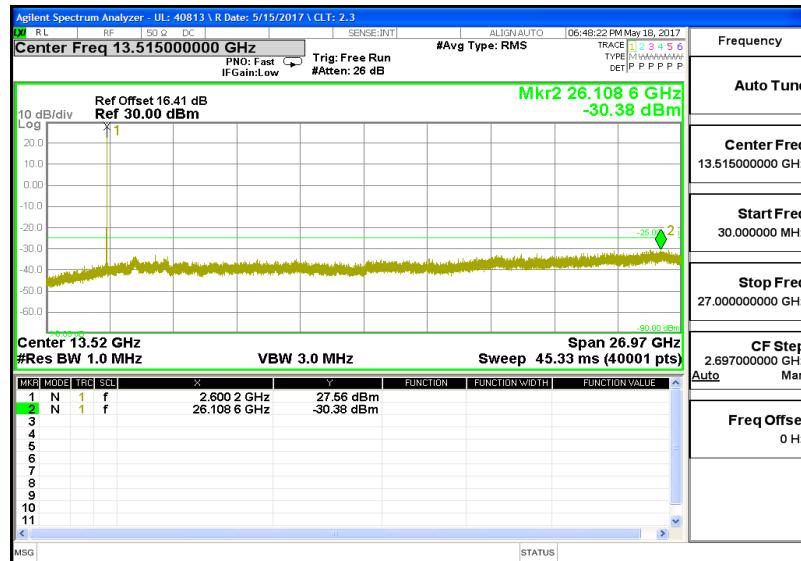


HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

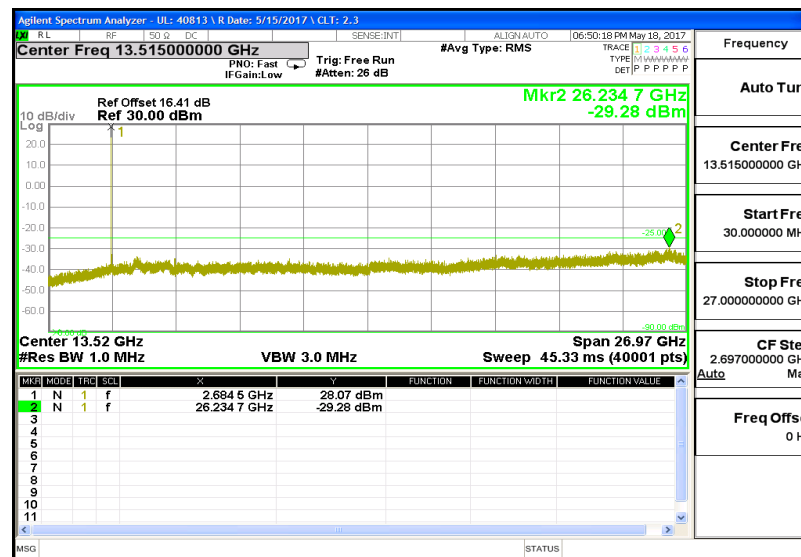



QPSK, (20.0 MHz+ 20.0 MHz BAND WIDTH)

LOW, RB1-99 + 1-0, 30 TO 27000 MHz

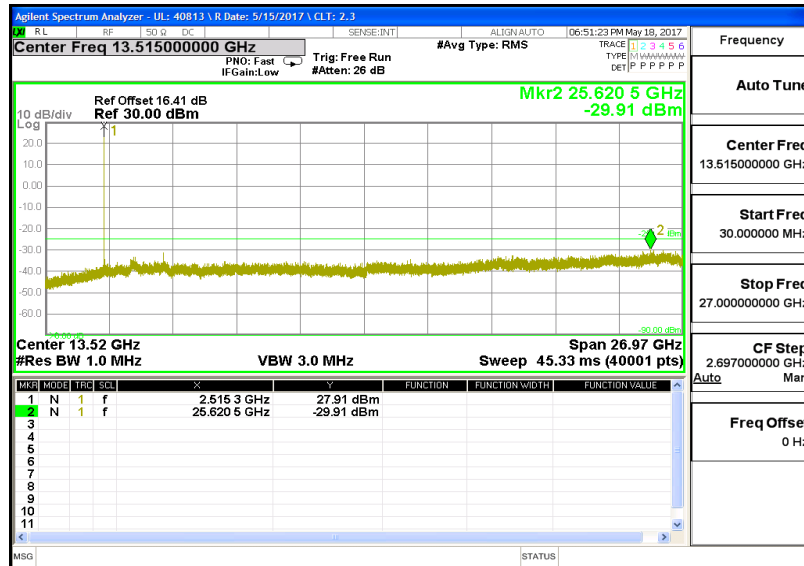


MID, RB1-99 + 1-0, 30 TO 27000 MHz

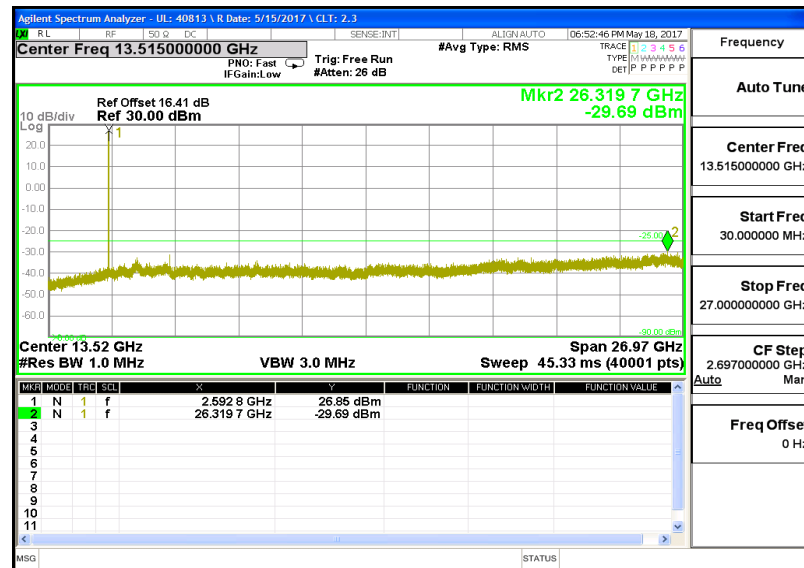


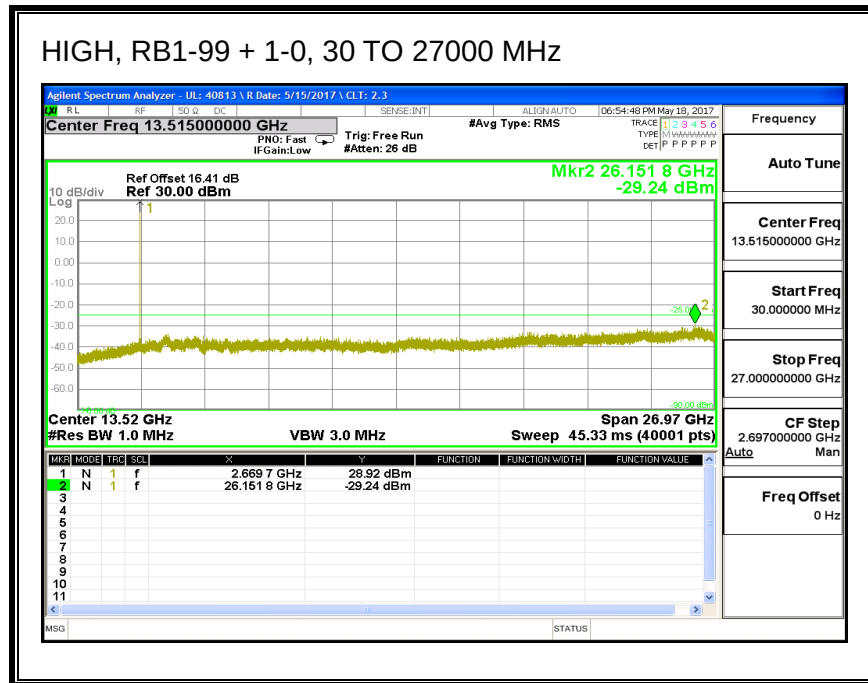


16QAM, (20.0 MHz+ 20.0 MHz BAND WIDTH)

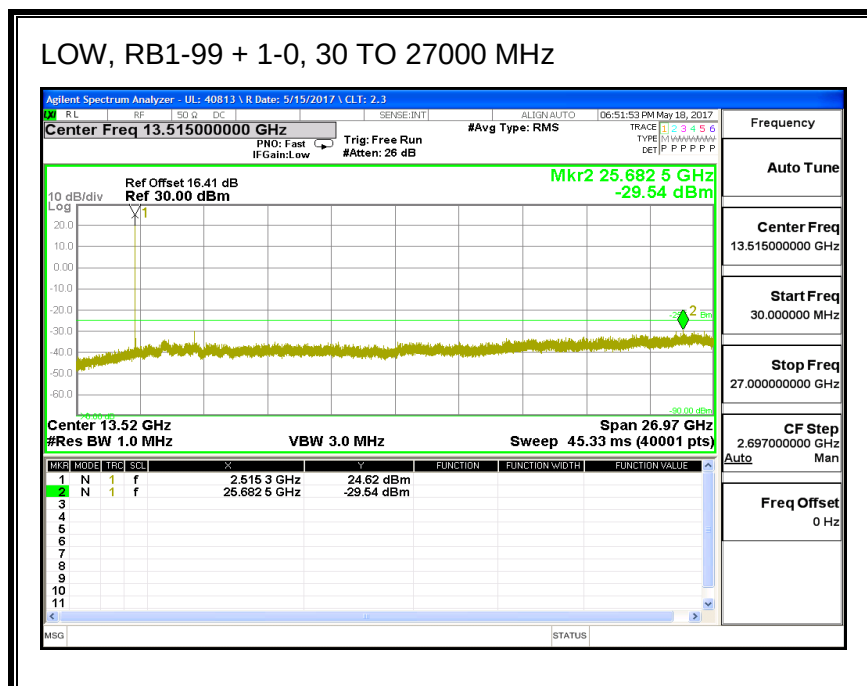

MID, RB1-99 + 1-0, 30 TO 27000 MHz

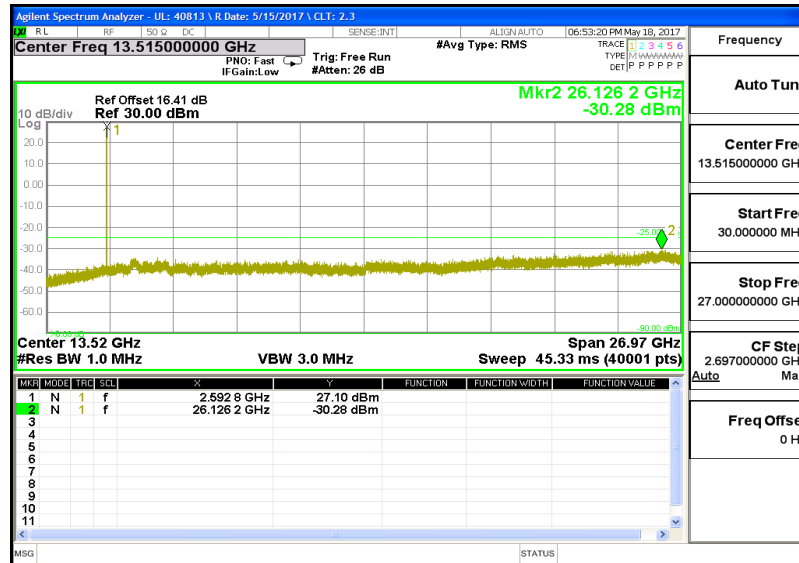

HIGH, RB1-99 + 1-0, 30 TO 27000 MHz

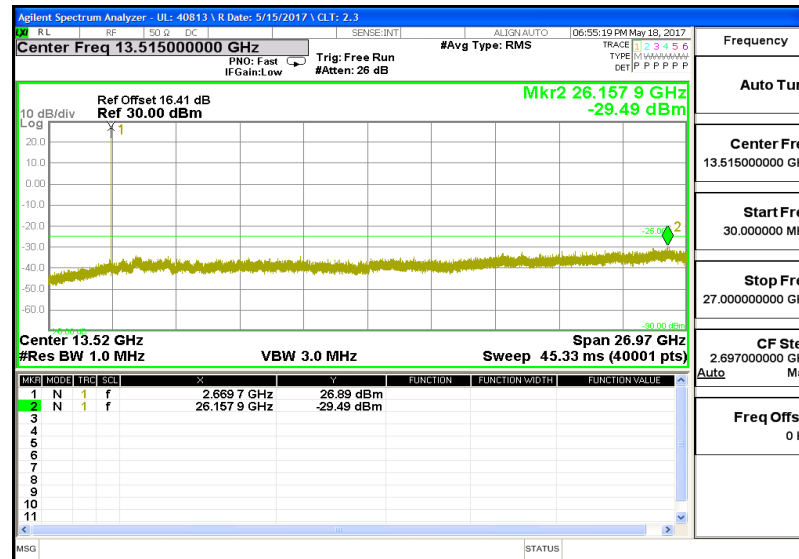

9. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §27.54

LIMITS

§27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to +50°C
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

See the following pages.

9.1. LTE BAND 7

ID:	38602	Date:	5/19/17
------------	-------	--------------	---------

QPSK, (20MHz + 10MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2501.1512	2568.9077		
Extreme (50C)		2501.1513	2568.9078	55.5	0.022
Extreme (40C)		2501.1513	2568.9078	54.4	0.021
Extreme (30C)		2501.1512	2568.9077	48.1	0.019
Extreme (10C)		2501.1512	2568.9077	45.4	0.018
Extreme (0C)		2501.1512	2568.9077	44.4	0.018
Extreme (-10C)		2501.1512	2568.9077	-24.7	-0.010
Extreme (-20C)		2501.1512	2568.9077	-35.0	-0.014
Extreme (-30C)		2501.1512	2568.9077	-36.2	-0.014
20C	15%	2501.1512	2568.9077	33.1	0.013
	-15%	2501.1512	2568.9077	31.3	0.012
	End Point	2501.1512	2568.9077	31.6	0.012

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2501.2093	2568.8722		
Extreme (50C)		2501.2094	2568.8723	70.9	0.028
Extreme (40C)		2501.2094	2568.8723	62.9	0.025
Extreme (30C)		2501.2094	2568.8723	66.3	0.026
Extreme (10C)		2501.2094	2568.8723	61.3	0.024
Extreme (0C)		2501.2094	2568.8723	58.5	0.023
Extreme (-10C)		2501.2092	2568.8721	-51.2	-0.020
Extreme (-20C)		2501.2092	2568.8721	-66.7	-0.026
Extreme (-30C)		2501.2092	2568.8721	-69.0	-0.027
20C	15%	2501.2093	2568.8722	48.6	0.019
	-15%	2501.2093	2568.8722	49.7	0.020
	End Point	2501.2093	2568.8722	49.9	0.020

9.2. LTE BAND 41

ID:	38602	Date:	5/19/17
------------	-------	--------------	---------

QPSK, (20MHz + 5MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2497.1064	2689.2307		
Extreme (50C)		2497.1064	2689.2307	-46.3	-0.018
Extreme (40C)		2497.1064	2689.2307	-44.0	-0.017
Extreme (30C)		2497.1064	2689.2307	-43.1	-0.017
Extreme (10C)		2497.1064	2689.2307	-30.3	-0.012
Extreme (0C)		2497.1064	2689.2307	-36.6	-0.014
Extreme (-10C)		2497.1064	2689.2307	-40.3	-0.016
Extreme (-20C)		2497.1064	2689.2307	-43.7	-0.017
Extreme (-30C)		2497.1064	2689.2307	-44.5	-0.017
20C	15%	2497.1064	2689.2307	16.8	0.006
	-15%	2497.1064	2689.2307	16.1	0.006
	End Point	2497.1064	2689.2307	17.9	0.007

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2497.3206	2689.1202		
Extreme (50C)		2497.3206	2689.1202	44.8	0.017
Extreme (40C)		2497.3206	2689.1202	38.9	0.015
Extreme (30C)		2497.3206	2689.1202	-33.3	-0.013
Extreme (10C)		2497.3206	2689.1202	36.1	0.014
Extreme (0C)		2497.3206	2689.1202	-44.3	-0.017
Extreme (-10C)		2497.3205	2689.1201	-58.6	-0.023
Extreme (-20C)		2497.3205	2689.1201	-62.4	-0.024
Extreme (-30C)		2497.3205	2689.1201	-60.8	-0.023
20C	15%	2497.3207	2689.1203	52.0	0.020
	-15%	2497.3206	2689.1202	49.2	0.019
	End Point	2497.3207	2689.1203	51.4	0.020

10. PEAK-TO-AVERAGE RATIO

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

RESULT

Test was performed on LAT 1 antenna; full resource block (FRB) for each bandwidth combination was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average ratio criteria.

10.1.1. LTE BAND 7

ID:	50820	Date:	5/18/17
------------	-------	--------------	---------

Mode	Channel Band-	PCC f (MHz)	SCC1 f (MHz)	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio
					Peak	Average	
LTE Band 7	10MHz / 20MHz	2525.6	2540.0	QPSK	29.81	21.93	7.88
				16QAM	29.53	20.97	8.56
	15 MHz / 15MHz	2527.5	2542.5	QPSK	29.90	21.92	7.98
				16QAM	28.95	20.95	8.00
	15MHz / 20MHz	2525.3	2542.4	QPSK	29.85	21.98	7.87
				16QAM	29.01	20.91	8.10
	20MHz / 10MHz	2530.1	2544.5	QPSK	29.62	21.93	7.69
				16QAM	29.52	20.93	8.59
	20MHz / 15MHz	2527.6	2544.7	QPSK	29.73	21.97	7.76
				16QAM	28.83	20.93	7.90
	20MHz / 20MHz	2525.1	2544.9	QPSK	29.84	21.98	7.86
				16QAM	29.01	20.99	8.02
Duty Cycle Correction Factor			0				
Peak to Average Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor							

10.1.2. LTE BAND 41

ID:	50820	Date:	5/18/17
------------	-------	--------------	---------

Mode	Channel Band-	PCC f (MHz)	SCC1 f (MHz)	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio
					Peak	Average	
LTE Band 41 (FCC)	5MHz / 20MHz	2583.8	2595.5	QPSK	26.13	14.88	4.27
				16QAM	25.17	13.86	4.33
	10MHz / 20MHz	2583.6	2598.0	QPSK	26.08	14.90	4.20
				16QAM	25.23	13.92	4.33
	15MHz / 15MHz	2585.5	2600.5	QPSK	26.21	14.96	4.27
				16QAM	25.62	13.82	4.82
	15MHz / 20MHz	2583.3	2600.4	QPSK	26.08	14.95	4.15
				16QAM	25.21	13.94	4.29
	20MHz / 5MHz	2590.5	2602.2	QPSK	25.68	14.92	3.78
				16QAM	24.71	13.97	3.76
	20MHz / 10MHz	2588.1	2602.5	QPSK	26.12	14.96	4.18
				16QAM	25.22	13.97	4.27
	20MHz / 15MHz	2585.6	2602.7	QPSK	25.87	14.85	4.04
				16QAM	25.06	13.88	4.20
	20MHz / 20MHz	2583.1	2602.9	QPSK	26.07	14.99	4.10
				16QAM	25.11	13.93	4.20
Duty Cycle Correction Factor			6.98				
Peak to Average Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor							

11. RADIATED TEST RESULTS

11.1. FIELD STRENGTH OF SPURIOUS RADIATION, LAT 1

RULE PART(S)

FCC: §2.1053, §27.53

LIMIT

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- LTE Band 7
- LTE Band 41

RESULTS

11.1.1.1. LTE BAND 7

QPSK LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/12/17
Test Engineer: 31300
Configuration: EUT Only
Mode: LTE Band 7, QPSK UL CA 20/10

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber E

3m Chamber E

Filter

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+2524.4MHz 1-99 1-0										
5.03	-58.7	H	3.0	-5.8	38.7	1.0	-43.4	-25.0	-18.4	
7.55	-61.0	H	3.0	-3.1	37.7	1.0	-39.9	-25.0	-14.9	
10.07	-62.0	H	3.0	-1.2	36.2	1.0	-36.3	-25.0	-11.3	
5.03	-59.0	V	3.0	-6.3	38.7	1.0	-44.0	-25.0	-19.0	
7.55	-60.0	V	3.0	-2.3	37.7	1.0	-39.0	-25.0	-14.0	
10.07	-61.4	V	3.0	-0.5	36.2	1.0	-35.7	-25.0	-10.7	
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0										
5.07	-59.4	H	3.0	-6.4	38.7	1.0	-44.1	-25.0	-19.1	
7.61	-60.6	H	3.0	-2.7	37.7	1.0	-39.4	-25.0	-14.4	
10.15	-61.7	H	3.0	-0.7	36.2	1.0	-35.9	-25.0	-10.9	
5.07	-58.4	V	3.0	-5.7	38.7	1.0	-43.4	-25.0	-18.4	
7.61	-61.0	V	3.0	-3.2	37.7	1.0	-39.9	-25.0	-14.9	
10.15	-61.6	V	3.0	-0.7	36.2	1.0	-35.9	-25.0	-10.9	
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0										
5.11	-58.4	H	3.0	-5.3	38.7	1.0	-43.0	-25.0	-18.0	
7.67	-60.2	H	3.0	-2.2	37.6	1.0	-38.9	-25.0	-13.9	
10.23	-60.7	H	3.0	0.3	36.3	1.0	-35.0	-25.0	-10.0	
5.11	-58.8	V	3.0	-6.0	38.7	1.0	-43.7	-25.0	-18.7	
7.67	-60.3	V	3.0	-2.5	37.6	1.0	-39.1	-25.0	-14.1	
10.23	-60.2	V	3.0	0.8	36.3	1.0	-34.5	-25.0	-9.5	

Rev. 05.21.15

16QAM LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/12/17
Test Engineer: 31300
Configuration: EUT Only
Mode: LTE Band 7, 16QAM UL CA 20/10

Test Equipment:
Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+2524.4MHz 1-99 1-0										
5.03	-57.6	H	3.0	-4.7	38.7	1.0	-42.4	-25.0	-17.4	
7.55	-60.9	H	3.0	-3.0	37.7	1.0	-39.8	-25.0	-14.8	
10.07	-61.8	H	3.0	-0.9	36.2	1.0	-36.1	-25.0	-11.1	
5.03	-59.1	V	3.0	-6.4	38.7	1.0	-44.1	-25.0	-19.1	
7.55	-61.2	V	3.0	-3.6	37.7	1.0	-40.3	-25.0	-15.3	
10.07	-61.7	V	3.0	-0.9	36.2	1.0	-36.1	-25.0	-11.1	
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0										
5.07	-58.8	H	3.0	-5.8	38.7	1.0	-43.5	-25.0	-18.5	
7.61	-59.8	H	3.0	-1.9	37.7	1.0	-38.6	-25.0	-13.6	
10.15	-61.7	H	3.0	-0.7	36.2	1.0	-35.9	-25.0	-10.9	
5.07	-59.0	V	3.0	-6.3	38.7	1.0	-44.0	-25.0	-19.0	
7.61	-60.4	V	3.0	-2.7	37.7	1.0	-39.4	-25.0	-14.4	
10.15	-61.8	V	3.0	-0.9	36.2	1.0	-36.1	-25.0	-11.1	
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0										
5.11	-59.1	H	3.0	-6.0	38.7	1.0	-43.7	-25.0	-18.7	
7.67	-60.7	H	3.0	-2.7	37.6	1.0	-39.3	-25.0	-14.3	
10.23	-60.3	H	3.0	0.7	36.3	1.0	-34.5	-25.0	-9.5	
5.11	-58.5	V	3.0	-5.7	38.7	1.0	-43.3	-25.0	-18.3	
7.67	-60.6	V	3.0	-2.8	37.6	1.0	-39.4	-25.0	-14.4	
10.23	-60.7	V	3.0	0.4	36.3	1.0	-34.9	-25.0	-9.9	

Rev. 05.21.15

QPSK LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/09/17
Test Engineer: 10641
Configuration: EUT Only
Mode: LTE Band 7, QPSK UL CA 20/20

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-65.5	H	3.0	-17.4	36.1	1.0	-52.5	-25.0	-27.5	
7.56	-66.8	H	3.0	-17.1	36.3	1.0	-52.4	-25.0	-27.4	
10.08	-67.0	H	3.0	-11.6	33.4	1.0	-44.1	-25.0	-19.1	
5.04	-66.4	V	3.0	-16.8	36.3	1.0	-52.1	-25.0	-27.1	
7.56	-66.4	V	3.0	-12.9	34.8	1.0	-46.6	-25.0	-21.6	
10.08	-67.9	V	3.0	-11.9	32.1	1.0	-43.0	-25.0	-18.0	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.07	-65.1	H	3.0	-14.1	36.0	1.0	-49.0	-25.0	-24.0	
7.61	-65.8	H	3.0	-12.8	35.2	1.0	-47.0	-25.0	-22.0	
10.14	-67.3	H	3.0	-11.0	32.0	1.0	-42.0	-25.0	-17.0	
5.07	-65.4	V	3.0	-17.7	36.1	1.0	-52.8	-25.0	-27.8	
7.61	-67.1	V	3.0	-9.4	37.7	1.0	-46.1	-25.0	-21.1	
10.14	-67.3	V	3.0	-6.4	36.2	1.0	-41.6	-25.0	-16.6	
High Channel (2540.2MHz)+2560Mhz 1-99 1-0										
5.10	-65.6	H	3.0	-16.4	36.2	1.0	-51.6	-25.0	-26.6	
7.65	-66.6	H	3.0	-15.9	36.0	1.0	-50.9	-25.0	-25.9	
10.20	-67.3	H	3.0	-11.0	32.0	1.0	-42.0	-25.0	-17.0	
5.10	-65.7	V	3.0	-18.7	36.3	1.0	-53.9	-25.0	-28.9	
7.65	-67.0	V	3.0	-15.8	35.8	1.0	-50.6	-25.0	-25.6	
10.20	-65.7	V	3.0	-4.7	36.3	1.0	-39.9	-25.0	-14.9	

Rev. 05.21.15

16QAM LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/12/17
Test Engineer: 31300
Configuration: EUT Only
Mode: LTE Band 7, 16QAM UL CA 20/20

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-58.7	H	3.0	-5.7	38.7	1.0	-43.4	-25.0	-18.4	
7.56	-61.2	H	3.0	-3.3	37.7	1.0	-40.1	-25.0	-15.1	
10.08	-61.9	H	3.0	-1.0	36.2	1.0	-36.2	-25.0	-11.2	
5.04	-58.4	V	3.0	-5.7	38.7	1.0	-43.4	-25.0	-18.4	
7.56	-60.9	V	3.0	-3.3	37.7	1.0	-40.0	-25.0	-15.0	
10.08	-60.4	V	3.0	0.5	36.2	1.0	-34.7	-25.0	-9.7	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.07	-58.9	H	3.0	-5.9	38.7	1.0	-43.6	-25.0	-18.6	
7.61	-59.9	H	3.0	-1.9	37.7	1.0	-38.6	-25.0	-13.6	
10.14	-61.4	H	3.0	-0.4	36.2	1.0	-35.7	-25.0	-10.7	
5.07	-58.7	V	3.0	-6.0	38.7	1.0	-43.7	-25.0	-18.7	
7.61	-60.0	V	3.0	-2.3	37.7	1.0	-39.0	-25.0	-14.0	
10.14	-61.3	V	3.0	-0.4	36.2	1.0	-35.6	-25.0	-10.6	
High Channel (2540.2MHz)+2560MHz 1-99 1-0										
5.10	-59.2	H	3.0	-6.1	38.7	1.0	-43.8	-25.0	-18.8	
7.65	-61.3	H	3.0	-3.3	37.7	1.0	-40.0	-25.0	-15.0	
10.20	-61.4	H	3.0	-0.5	36.3	1.0	-35.7	-25.0	-10.7	
5.10	-59.1	V	3.0	-6.3	38.7	1.0	-44.0	-25.0	-19.0	
7.65	-61.0	V	3.0	-3.2	37.7	1.0	-39.9	-25.0	-14.9	
10.20	-62.2	V	3.0	-1.2	36.3	1.0	-36.4	-25.0	-11.4	

Rev. 05.21.15

11.1.2. LTE BAND 41

QPSK LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 11792476 Date: 06/12/17 Test Engineer: 31300 Configuration: EUT Only Mode: LTE Band 41, QPSK UL CA 20/5										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B41				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz)+2517.7MHz 1-99, 1-0										
5.02	-59.1	H	3.0	-6.1	38.7	1.0	-43.8	-25.0	-18.8	
7.54	-60.9	H	3.0	-3.1	37.7	1.0	-39.8	-25.0	-14.8	
10.05	-62.1	H	3.0	-1.2	36.2	1.0	-36.4	-25.0	-11.4	
5.02	-58.3	V	3.0	-5.7	38.7	1.0	-43.4	-25.0	-18.4	
7.54	-60.6	V	3.0	-3.0	37.7	1.0	-39.7	-25.0	-14.7	
10.05	-61.5	V	3.0	-0.7	36.2	1.0	-35.9	-25.0	-10.9	
Mid Channel (2590.5MHz)+2602.2MHz 1-99, 1-0										
5.19	-59.7	H	3.0	-6.5	38.7	1.0	-44.2	-25.0	-19.2	
7.79	-60.6	H	3.0	-2.4	37.6	1.0	-39.0	-25.0	-14.0	
10.39	-60.9	H	3.0	0.2	36.4	1.0	-35.2	-25.0	-10.2	
5.19	-59.5	V	3.0	-6.6	38.7	1.0	-44.2	-25.0	-19.2	
7.79	-61.1	V	3.0	-3.2	37.6	1.0	-39.7	-25.0	-14.7	
10.39	-61.0	V	3.0	0.2	36.4	1.0	-35.2	-25.0	-10.2	
High Channel (2675MHz)+2686.7MHz 1-99, 1-0										
5.36	-60.6	H	3.0	-7.0	38.6	1.0	-44.6	-25.0	-19.6	
8.04	-61.0	H	3.0	-2.6	37.4	1.0	-39.0	-25.0	-14.0	
10.72	-61.8	H	3.0	-0.4	36.6	1.0	-35.9	-25.0	-10.9	
5.36	-60.6	V	3.0	-7.3	38.6	1.0	-44.9	-25.0	-19.9	
8.04	-58.4	V	3.0	-0.1	37.4	1.0	-36.5	-25.0	-11.5	
10.72	-61.4	V	3.0	0.1	36.6	1.0	-35.5	-25.0	-10.5	
Rev. 05.21.15										

16QAM LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/12/17
Test Engineer: 31300
Configuration: EUT Only
Mode: LTE Band 41, 16QAM UL CA 20/5

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz)+2517.7MHz 1-99, 1-0										
5.02	-58.6	H	3.0	-5.7	38.7	1.0	-43.4	-25.0	-18.4	
7.54	-60.8	H	3.0	-3.0	37.7	1.0	-39.7	-25.0	-14.7	
10.05	-62.1	H	3.0	-1.3	36.2	1.0	-36.4	-25.0	-11.4	
5.02	-58.9	V	3.0	-6.2	38.7	1.0	-43.9	-25.0	-18.9	
7.54	-61.0	V	3.0	-3.4	37.7	1.0	-40.1	-25.0	-15.1	
10.05	-62.0	V	3.0	-1.1	36.2	1.0	-36.3	-25.0	-11.3	
Mid Channel (2590.5MHz)+2602.2MHz 1-99, 1-0										
5.19	-59.0	H	3.0	-5.7	38.7	1.0	-43.4	-25.0	-18.4	
7.79	-59.9	H	3.0	-1.8	37.6	1.0	-38.4	-25.0	-13.4	
10.39	-61.7	H	3.0	-0.5	36.4	1.0	-35.9	-25.0	-10.9	
5.19	-59.7	V	3.0	-6.8	38.7	1.0	-44.5	-25.0	-19.5	
7.79	-60.8	V	3.0	-2.9	37.6	1.0	-39.4	-25.0	-14.4	
10.39	-61.3	V	3.0	-0.2	36.4	1.0	-35.5	-25.0	-10.5	
High Channel (2675MHz)+2686.7MHz 1-99, 1-0										
5.36	-60.5	H	3.0	-6.9	38.6	1.0	-44.5	-25.0	-19.5	
8.04	-60.3	H	3.0	-1.9	37.4	1.0	-38.3	-25.0	-13.3	
10.72	-61.4	H	3.0	0.0	36.6	1.0	-35.6	-25.0	-10.6	
5.36	-60.5	V	3.0	-7.1	38.6	1.0	-44.8	-25.0	-19.8	
8.04	-61.1	V	3.0	-2.8	37.4	1.0	-39.2	-25.0	-14.2	
10.72	-61.3	V	3.0	0.3	36.6	1.0	-35.3	-25.0	-10.3	

Rev. 05.21.15

QPSK LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 11792476 Date: 06/13/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 41, QPSK UL CA 20/20										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber Pre-amplifier Filter Limit 3m Chamber E 3m Chamber E Filter LTE B41										
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0										
5.01	-65.3	H	3.0	-12.4	38.7	1.0	-50.1	-25.0	-25.1	
7.52	-67.4	H	3.0	-9.6	37.7	1.0	-46.3	-25.0	-21.3	
10.02	-68.1	H	3.0	-7.3	36.1	1.0	-42.4	-25.0	-17.4	
5.01	-65.1	V	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.52	-66.8	V	3.0	-9.2	37.7	1.0	-45.9	-25.0	-20.9	
10.02	-68.0	V	3.0	-7.2	36.1	1.0	-42.3	-25.0	-17.3	
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0										
5.17	-66.3	H	3.0	-13.1	38.7	1.0	-50.8	-25.0	-25.8	
7.75	-67.1	H	3.0	-9.0	37.6	1.0	-45.6	-25.0	-20.6	
10.33	-66.8	H	3.0	-5.8	36.3	1.0	-41.1	-25.0	-16.1	
5.17	-65.9	V	3.0	-13.0	38.7	1.0	-50.7	-25.0	-25.7	
7.75	-66.9	V	3.0	-9.0	37.6	1.0	-45.6	-25.0	-20.6	
10.33	-65.8	V	3.0	-4.6	36.3	1.0	-40.0	-25.0	-15.0	
High Channel (2660.2MHz) + 2680MHz 1-99 1-0										
5.32	-67.6	H	3.0	-14.1	38.6	1.0	-51.7	-25.0	-26.7	
7.98	-66.1	H	3.0	-7.8	37.4	1.0	-44.2	-25.0	-19.2	
10.64	-68.1	H	3.0	-6.7	36.5	1.0	-42.3	-25.0	-17.3	
5.32	-66.6	V	3.0	-13.4	38.6	1.0	-51.0	-25.0	-26.0	
7.98	-66.4	V	3.0	-8.2	37.4	1.0	-44.7	-25.0	-19.7	
10.64	-67.0	V	3.0	-5.5	36.5	1.0	-41.0	-25.0	-16.0	
Rev. 05.21.15										

16QAM LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #: 11792476

Date: 06/13/17

Test Engineer: 10641

Configuration: EUT Only

Mode: LTE Band 41, 16QAM UL CA 20/20

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0										
5.01	-66.6	H	3.0	-13.8	38.7	1.0	-51.5	-25.0	-26.5	
7.52	-67.8	H	3.0	-10.0	37.7	1.0	-46.7	-25.0	-21.7	
10.02	-67.3	H	3.0	-6.4	36.1	1.0	-41.6	-25.0	-16.6	
5.01	-65.1	V	3.0	-12.5	38.7	1.0	-50.2	-25.0	-25.2	
7.52	-67.4	V	3.0	-9.8	37.7	1.0	-46.5	-25.0	-21.5	
10.02	-67.0	V	3.0	-6.2	36.1	1.0	-41.3	-25.0	-16.3	
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0										
5.17	-66.0	H	3.0	-12.7	38.7	1.0	-50.4	-25.0	-25.4	
7.75	-66.9	H	3.0	-8.8	37.6	1.0	-45.4	-25.0	-20.4	
10.33	-67.1	H	3.0	-6.1	36.3	1.0	-41.4	-25.0	-16.4	
5.17	-65.7	V	3.0	-12.8	38.7	1.0	-50.5	-25.0	-25.5	
7.75	-66.1	V	3.0	-8.2	37.6	1.0	-44.8	-25.0	-19.8	
10.33	-67.7	V	3.0	-6.6	36.3	1.0	-41.9	-25.0	-16.9	
High Channel (2660.2MHz) + 2680MHz 1-99 1-0										
5.32	-68.4	H	3.0	-14.8	38.6	1.0	-52.5	-25.0	-27.5	
7.98	-67.7	H	3.0	-9.4	37.4	1.0	-45.8	-25.0	-20.8	
10.64	-68.1	H	3.0	-6.8	36.5	1.0	-42.3	-25.0	-17.3	
5.32	-68.2	V	3.0	-15.0	38.6	1.0	-52.6	-25.0	-27.6	
7.98	-67.2	V	3.0	-9.0	37.4	1.0	-45.5	-25.0	-20.5	
10.64	-66.7	V	3.0	-5.3	36.5	1.0	-40.8	-25.0	-15.8	

Rev. 05.21.15

Page 104 of 115

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4031B
 47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
 This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2. FIELD STRENGTH OF SPURIOUS RADIATION, UAT 1

11.2.1. LTE BAND 7

QPSK LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: 11792476 Date: 06/14/17 Test Engineer: 39004 Configuration: EUT Only Mode: LTE Band 7, QPSK UL CA 20/10											
Test Equipment: Substitution: Horn T344 Substitution, and 8ft SMA Cable											
Chamber		Pre-amplifier		Filter		Limit					
3m Chamber E		3m Chamber E		Filter		LTE B7					
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (2510MHz)+2524.4MHz 1-99 1-0											
5.03	-64.8	H	3.0	-11.8	38.7	1.0	-49.5	-25.0	-24.5		
7.55	-66.6	H	3.0	-8.8	37.7	1.0	-45.5	-25.0	-20.5		
10.07	-67.4	H	3.0	-6.6	36.2	1.0	-41.7	-25.0	-16.7		
5.03	-64.6	V	3.0	-12.0	38.7	1.0	-49.7	-25.0	-24.7		
7.55	-66.6	V	3.0	-9.0	37.7	1.0	-45.7	-25.0	-20.7		
10.07	-67.2	V	3.0	-6.4	36.2	1.0	-41.6	-25.0	-16.6		
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0											
5.07	-65.7	H	3.0	-12.7	38.7	1.0	-50.4	-25.0	-25.4		
7.61	-67.3	H	3.0	-9.4	37.7	1.0	-46.1	-25.0	-21.1		
10.15	-67.6	H	3.0	-6.6	36.2	1.0	-41.9	-25.0	-16.9		
5.07	-65.1	V	3.0	-12.4	38.7	1.0	-50.1	-25.0	-25.1		
7.61	-66.8	V	3.0	-9.0	37.7	1.0	-45.7	-25.0	-20.7		
10.15	-67.8	V	3.0	-6.9	36.2	1.0	-42.1	-25.0	-17.1		
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0											
5.11	-65.1	H	3.0	-12.0	38.7	1.0	-49.7	-25.0	-24.7		
7.67	-66.6	H	3.0	-8.6	37.6	1.0	-45.2	-25.0	-20.2		
10.23	-67.8	H	3.0	-6.8	36.3	1.0	-42.1	-25.0	-17.1		
5.11	-65.0	V	3.0	-12.2	38.7	1.0	-49.8	-25.0	-24.8		
7.67	-66.6	V	3.0	-8.8	37.6	1.0	-45.5	-25.0	-20.5		
10.23	-67.5	V	3.0	-6.5	36.3	1.0	-41.8	-25.0	-16.8		
Rev. 05.21.15											

16QAM LTE BAND 7 (20.0MHZ + 10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #: 11792476

Date: 06/14/17

Test Engineer: 39004

Configuration: EUT Only

Mode: LTE Band 7, 16QAM UL CA 20/10

Test Equipment:

Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+2524.4MHz 1-99 1-0										
5.03	-64.7	H	3.0	-11.8	38.7	1.0	-49.5	-25.0	-24.5	
7.55	-66.8	H	3.0	-8.9	37.7	1.0	-45.6	-25.0	-20.6	
10.07	-67.4	H	3.0	-6.5	36.2	1.0	-41.7	-25.0	-16.7	
5.03	-65.3	V	3.0	-12.6	38.7	1.0	-50.3	-25.0	-25.3	
7.55	-67.0	V	3.0	-9.3	37.7	1.0	-46.0	-25.0	-21.0	
10.07	-67.3	V	3.0	-6.5	36.2	1.0	-41.6	-25.0	-16.6	
Mid Channel (2530.1MHz)+2544.5MHz 1-99 1-0										
5.07	-65.8	H	3.0	-12.8	38.7	1.0	-50.4	-25.0	-25.4	
7.61	-67.6	H	3.0	-9.7	37.7	1.0	-46.4	-25.0	-21.4	
10.15	-67.4	H	3.0	-6.5	36.2	1.0	-41.7	-25.0	-16.7	
5.07	-65.7	V	3.0	-13.0	38.7	1.0	-50.7	-25.0	-25.7	
7.61	-67.5	V	3.0	-9.8	37.7	1.0	-46.4	-25.0	-21.4	
10.15	-67.7	V	3.0	-6.8	36.2	1.0	-42.0	-25.0	-17.0	
High Channel (2550.1MHz)+2564.5MHz 1-99 1-0										
5.11	-65.0	H	3.0	-11.9	38.7	1.0	-49.6	-25.0	-24.6	
7.67	-66.7	H	3.0	-8.7	37.6	1.0	-45.4	-25.0	-20.4	
10.23	-67.8	H	3.0	-6.8	36.3	1.0	-42.0	-25.0	-17.0	
5.11	-65.2	V	3.0	-12.4	38.7	1.0	-50.1	-25.0	-25.1	
7.67	-66.3	V	3.0	-8.5	37.6	1.0	-45.2	-25.0	-20.2	
10.23	-67.2	V	3.0	-6.2	36.3	1.0	-41.4	-25.0	-16.4	

Rev. 05.21.15

Page 106 of 115

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4031B
 47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

QPSK LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 11792476 Date: 06/14/17 Test Engineer: 39004 Configuration: EUT Only Mode: LTE Band 7, QPSK UL CA 20/20										
Test Equipment: Substitution: Horn T344 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B7				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-64.5	H	3.0	-16.4	36.1	1.0	-51.5	-25.0	-26.5	
7.56	-67.7	H	3.0	-18.0	36.3	1.0	-53.3	-25.0	-28.3	
10.08	-67.7	H	3.0	-12.3	33.4	1.0	-44.7	-25.0	-19.7	
5.04	-64.7	V	3.0	-15.1	36.3	1.0	-50.4	-25.0	-25.4	
7.56	-67.4	V	3.0	-13.8	34.8	1.0	-47.6	-25.0	-22.6	
10.08	-67.5	V	3.0	-11.5	32.1	1.0	-42.6	-25.0	-17.6	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.07	-63.2	H	3.0	-12.2	36.0	1.0	-47.2	-25.0	-22.2	
7.61	-66.8	H	3.0	-13.7	35.2	1.0	-47.9	-25.0	-22.9	
10.14	-67.7	H	3.0	-11.4	32.0	1.0	-42.5	-25.0	-17.5	
5.07	-63.5	V	3.0	-15.9	36.1	1.0	-51.0	-25.0	-26.0	
7.61	-66.7	V	3.0	-9.0	37.7	1.0	-45.6	-25.0	-20.6	
10.14	-67.4	V	3.0	-6.4	36.2	1.0	-41.7	-25.0	-16.7	
High Channel (2540.2MHz)+2560Mhz 1-99 1-0										
5.10	-64.3	H	3.0	-15.1	36.2	1.0	-50.3	-25.0	-25.3	
7.65	-66.7	H	3.0	-16.0	36.0	1.0	-51.0	-25.0	-26.0	
10.20	-67.4	H	3.0	-11.1	32.0	1.0	-42.1	-25.0	-17.1	
5.10	-64.6	V	3.0	-17.6	36.3	1.0	-52.9	-25.0	-27.9	
7.65	-66.9	V	3.0	-15.7	35.8	1.0	-50.5	-25.0	-25.5	
10.20	-67.5	V	3.0	-6.5	36.3	1.0	-41.7	-25.0	-16.7	
Rev. 05.21.15										

16QAM LTE BAND 7 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/14/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, 16QAM UL CA 20/20

Test Equipment:
 Substitution: Horn T344 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)+ 2529.8MHz 1-99 1-0										
5.04	-64.7	H	3.0	-11.7	38.7	1.0	-49.4	-25.0	-24.4	
7.56	-66.8	H	3.0	-9.0	37.7	1.0	-45.7	-25.0	-20.7	
10.08	-67.6	H	3.0	-6.8	36.2	1.0	-41.9	-25.0	-16.9	
5.04	-64.6	V	3.0	-12.0	38.7	1.0	-49.6	-25.0	-24.6	
7.56	-66.9	V	3.0	-9.3	37.7	1.0	-46.0	-25.0	-21.0	
10.08	-67.6	V	3.0	-6.7	36.2	1.0	-41.9	-25.0	-16.9	
Mid Channel (2525.1MHz)+2544.9MHz 1-99 1-0										
5.07	-64.1	H	3.0	-11.1	38.7	1.0	-48.8	-25.0	-23.8	
7.61	-66.8	H	3.0	-8.8	37.7	1.0	-45.5	-25.0	-20.5	
10.14	-67.3	H	3.0	-6.4	36.2	1.0	-41.6	-25.0	-16.6	
5.07	-64.4	V	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.61	-66.7	V	3.0	-9.0	37.7	1.0	-45.7	-25.0	-20.7	
10.14	-67.7	V	3.0	-6.7	36.2	1.0	-41.9	-25.0	-16.9	
High Channel (2540.2MHz)+2560MHz 1-99 1-0										
5.10	-64.7	H	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.65	-66.5	H	3.0	-8.6	37.7	1.0	-45.2	-25.0	-20.2	
10.20	-67.2	H	3.0	-6.2	36.3	1.0	-41.5	-25.0	-16.5	
5.10	-64.0	V	3.0	-11.2	38.7	1.0	-48.9	-25.0	-23.9	
7.65	-66.5	V	3.0	-8.7	37.7	1.0	-45.3	-25.0	-20.3	
10.20	-67.2	V	3.0	-6.3	36.3	1.0	-41.5	-25.0	-16.5	

Rev. 05.21.15

Page 108 of 115

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4031B
 47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2.2. LTE BAND 41

QPSK LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/14/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 41, QPSK UL CA 20/5

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) +2517.7MHz 1-99, 1-0										
5.02	-64.4	H	3.0	-11.4	38.7	1.0	-49.1	-25.0	-24.1	
7.54	-66.9	H	3.0	-9.1	37.7	1.0	-45.8	-25.0	-20.8	
10.05	-67.4	H	3.0	-6.6	36.2	1.0	-41.8	-25.0	-16.8	
5.02	-64.2	V	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.54	-66.8	V	3.0	-9.2	37.7	1.0	-45.9	-25.0	-20.9	
10.05	-67.2	V	3.0	-6.4	36.2	1.0	-41.6	-25.0	-16.6	
Mid Channel (2590.5MHz) +2602.2MHz 1-99, 1-0										
5.19	-64.2	H	3.0	-10.9	38.7	1.0	-48.6	-25.0	-23.6	
7.79	-66.8	H	3.0	-8.6	37.6	1.0	-45.2	-25.0	-20.2	
10.39	-67.3	H	3.0	-6.2	36.4	1.0	-41.6	-25.0	-16.6	
5.19	-64.1	V	3.0	-11.2	38.7	1.0	-48.9	-25.0	-23.9	
7.79	-66.5	V	3.0	-8.6	37.6	1.0	-45.1	-25.0	-20.1	
10.39	-67.3	V	3.0	-6.2	36.4	1.0	-41.5	-25.0	-16.5	
High Channel (2675MHz) +2686.7MHz 1-99, 1-0										
5.36	-64.1	H	3.0	-10.4	38.6	1.0	-48.0	-25.0	-23.0	
8.04	-66.6	H	3.0	-8.1	37.4	1.0	-44.5	-25.0	-19.5	
10.72	-67.7	H	3.0	-6.3	36.6	1.0	-41.8	-25.0	-16.8	
5.36	-64.4	V	3.0	-11.0	38.6	1.0	-48.7	-25.0	-23.7	
8.04	-66.7	V	3.0	-8.4	37.4	1.0	-44.8	-25.0	-19.8	
10.72	-67.3	V	3.0	-5.8	36.6	1.0	-41.4	-25.0	-16.4	

Rev. 05.21.15

16QAM LTE BAND 41 (20.0MHZ + 5.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/14/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 41, 16QAM UL CA 20/5

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz)+2517.7MHz 1-99, 1-0										
5.02	-65.3	H	3.0	-12.4	38.7	1.0	-50.1	-25.0	-25.1	
7.54	-66.7	H	3.0	-8.8	37.7	1.0	-45.6	-25.0	-20.6	
10.05	-67.6	H	3.0	-6.8	36.2	1.0	-41.9	-25.0	-16.9	
5.02	-65.2	V	3.0	-12.6	38.7	1.0	-50.3	-25.0	-25.3	
7.54	-66.5	V	3.0	-8.9	37.7	1.0	-45.6	-25.0	-20.6	
10.05	-67.4	V	3.0	-6.6	36.2	1.0	-41.8	-25.0	-16.8	
Mid Channel (2590.5MHz)+2602.2MHz 1-99, 1-0										
5.19	-64.9	H	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.79	-66.3	H	3.0	-8.2	37.6	1.0	-44.8	-25.0	-19.8	
10.39	-67.7	H	3.0	-6.5	36.4	1.0	-41.9	-25.0	-16.9	
5.19	-65.1	V	3.0	-12.1	38.7	1.0	-49.8	-25.0	-24.8	
7.79	-66.7	V	3.0	-8.8	37.6	1.0	-45.4	-25.0	-20.4	
10.39	-67.8	V	3.0	-6.6	36.4	1.0	-42.0	-25.0	-17.0	
High Channel (2675MHz)+2686.7MHz 1-99, 1-0										
5.36	-64.3	H	3.0	-10.7	38.6	1.0	-48.3	-25.0	-23.3	
8.04	-66.6	H	3.0	-8.1	37.4	1.0	-44.5	-25.0	-19.5	
10.72	-67.2	H	3.0	-5.8	36.6	1.0	-41.4	-25.0	-16.4	
5.36	-64.2	V	3.0	-10.9	38.6	1.0	-48.5	-25.0	-23.5	
8.04	-66.3	V	3.0	-8.1	37.4	1.0	-44.5	-25.0	-19.5	
10.72	-67.4	V	3.0	-5.9	36.6	1.0	-41.4	-25.0	-16.4	

Rev. 05.21.15

QPSK LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 11792476
Date: 06/14/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 41, QPSK UL CA 20/20

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0										
5.03	-65.0	H	3.0	-12.1	38.7	1.0	-49.8	-25.0	-24.8	
7.55	-66.6	H	3.0	-8.8	37.7	1.0	-45.5	-25.0	-20.5	
10.06	-67.7	H	3.0	-6.8	36.2	1.0	-42.0	-25.0	-17.0	
5.03	-65.3	V	3.0	-12.7	38.7	1.0	-50.4	-25.0	-25.4	
7.55	-66.7	V	3.0	-9.1	37.7	1.0	-45.8	-25.0	-20.8	
10.06	-67.5	V	3.0	-6.7	36.2	1.0	-41.9	-25.0	-16.9	
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0										
5.19	-64.9	H	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.78	-66.6	H	3.0	-8.5	37.6	1.0	-45.1	-25.0	-20.1	
10.37	-67.0	H	3.0	-5.9	36.4	1.0	-41.2	-25.0	-16.2	
5.19	-64.9	V	3.0	-11.9	38.7	1.0	-49.6	-25.0	-24.6	
7.78	-66.8	V	3.0	-8.9	37.6	1.0	-45.4	-25.0	-20.4	
10.37	-67.2	V	3.0	-6.0	36.4	1.0	-41.4	-25.0	-16.4	
High Channel (2660.2MHz) + 2680MHz 1-99 1-0										
5.34	-65.3	H	3.0	-11.7	38.6	1.0	-49.4	-25.0	-24.4	
8.01	-66.8	H	3.0	-8.4	37.4	1.0	-44.8	-25.0	-19.8	
10.68	-67.5	H	3.0	-6.1	36.6	1.0	-41.7	-25.0	-16.7	
5.34	-65.2	V	3.0	-11.9	38.6	1.0	-49.6	-25.0	-24.6	
8.01	-66.4	V	3.0	-8.2	37.4	1.0	-44.6	-25.0	-19.6	
10.68	-67.4	V	3.0	-5.8	36.6	1.0	-41.4	-25.0	-16.4	

Rev. 05.21.15

16QAM LTE BAND 41 (20.0MHZ + 20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #: 11792476

Date: 06/14/17

Test Engineer: 39004

Configuration: EUT Only

Mode: LTE Band 41, 16QAM UL CA 20/20

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz) + 2525.8MHz 1-99 1-0										
5.03	-64.9	H	3.0	-12.0	38.7	1.0	-49.6	-25.0	-24.6	
7.55	-66.4	H	3.0	-8.6	37.7	1.0	-45.3	-25.0	-20.3	
10.06	-67.1	H	3.0	-6.2	36.2	1.0	-41.4	-25.0	-16.4	
5.03	-65.0	V	3.0	-12.4	38.7	1.0	-50.1	-25.0	-25.1	
7.55	-66.9	V	3.0	-9.2	37.7	1.0	-46.0	-25.0	-21.0	
10.06	-67.5	V	3.0	-6.7	36.2	1.0	-41.8	-25.0	-16.8	
Mid Channel (2583.1MHz) + 2602.9MHz 1-99 1-0										
5.19	-64.8	H	3.0	-11.5	38.7	1.0	-49.2	-25.0	-24.2	
7.78	-66.6	H	3.0	-8.5	37.6	1.0	-45.0	-25.0	-20.0	
10.37	-67.6	H	3.0	-6.5	36.4	1.0	-41.9	-25.0	-16.9	
5.19	-64.6	V	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.78	-66.4	V	3.0	-8.5	37.6	1.0	-45.1	-25.0	-20.1	
10.37	-67.3	V	3.0	-6.1	36.4	1.0	-41.5	-25.0	-16.5	
High Channel (2660.2MHz) + 2680MHz 1-99 1-0										
5.34	-65.2	H	3.0	-11.6	38.6	1.0	-49.2	-25.0	-24.2	
8.01	-66.3	H	3.0	-7.9	37.4	1.0	-44.3	-25.0	-19.3	
10.68	-67.4	H	3.0	-6.1	36.6	1.0	-41.6	-25.0	-16.6	
5.34	-65.3	V	3.0	-12.1	38.6	1.0	-49.7	-25.0	-24.7	
8.01	-66.7	V	3.0	-8.5	37.4	1.0	-44.9	-25.0	-19.9	
10.68	-67.4	V	3.0	-5.9	36.6	1.0	-41.5	-25.0	-16.5	

Rev. 05.21.15