



CERTIFICATION TEST REPORT

Report Number. : 11792476-E2V3

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1902

FCC ID : BCG-E3176A

IC : 579C-E3176A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS - 247 ISSUE 2

Date Of Issue:
August 25, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	8/17/2017	Initial Issue	Hung Thai
V2	8/21/2017	Address TCB's Questions	Chin Pang
V3	8/25/2017	Address TCB's Questions	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. SOFTWARE AND FIRMWARE.....	9
5.5. WORST-CASE CONFIGURATION AND MODE.....	10
5.6. DESCRIPTION OF TEST SETUP.....	11
6. TEST AND MEASUREMENT EQUIPMENT	16
7. ANTENNA PORT TEST RESULTS	17
7.1. MEASUREMENT METHODS	17
7.2. ON TIME, DUTY CYCLE	18
7.3. UAT 1 BLE 1M Pmax.....	20
7.3.1. 6 dB BANDWIDTH.....	20
7.3.2. 99% BANDWIDTH.....	23
7.3.3. AVERAGE POWER	26
7.3.4. OUTPUT POWER	27
7.3.5. POWER SPECTRAL DENSITY	28
7.3.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	31
7.4. UAT 1 BLE 1M Plow	35
7.4.1. 6 dB BANDWIDTH.....	35
7.4.2. 99% BANDWIDTH.....	38
7.4.3. AVERAGE POWER	41
7.4.4. OUTPUT POWER	42
7.4.5. POWER SPECTRAL DENSITY	43
7.4.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	46
7.5. UAT 1 BLE 2M Pmax.....	50
7.5.1. AVERAGE POWER	50
7.5.2. OUTPUT POWER	51
7.6. UAT 1 BLE 2M Plow	52

7.6.1.	AVERAGE POWER	52
7.6.2.	OUTPUT POWER	53
7.7.	LAT 3 BLE 1M P _{max}	54
7.7.1.	6 dB BANDWIDTH.....	54
7.7.2.	99% BANDWIDTH.....	57
7.7.3.	AVERAGE POWER	60
7.7.4.	OUTPUT POWER	61
7.7.5.	POWER SPECTRAL DENSITY	62
7.7.6.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	65
7.8.	LAT 3 BLE 1M P _{low}	69
7.8.1.	6 dB BANDWIDTH.....	69
7.8.2.	99% BANDWIDTH.....	72
7.8.3.	AVERAGE POWER	75
7.8.4.	OUTPUT POWER	76
7.8.5.	POWER SPECTRAL DENSITY	77
7.8.6.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	80
7.9.	LAT 3 BLE 2M P _{max}	84
7.9.1.	AVERAGE POWER	84
7.9.2.	OUTPUT POWER	85
7.10.	LAT 3 BLE 2M P _{low}	86
7.10.1.	AVERAGE POWER	86
7.10.2.	OUTPUT POWER.....	87
8.	RADIATED TEST RESULTS.....	88
8.1.	LIMITS AND PROCEDURE	88
8.2.	UAT 1 BLE 1M P _{max}	89
8.2.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	89
8.2.2.	AUTHORIZED BANDEDGE (HIGH CHANNEL).....	91
8.2.3.	HARMONICS AND SPURIOUS EMISSIONS	93
8.3.	UAT 1 BLE 1M P _{low}	99
8.3.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	99
8.3.2.	AUTHORIZED BANDEDGE (HIGH CHANNEL).....	101
8.3.3.	HARMONICS AND SPURIOUS EMISSIONS	103
8.4.	LAT 3 BLE 1M P _{max}	109
8.4.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	109
8.4.2.	AUTHORIZED BANDEDGE (HIGH CHANNEL).....	111
8.4.3.	HARMONICS AND SPURIOUS EMISSIONS	113
8.5.	LAT 3 BLE 1M P _{low}	119
8.5.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	119
8.5.2.	AUTHORIZED BANDEDGE (HIGH CHANNEL).....	121
8.5.3.	HARMONICS AND SPURIOUS EMISSIONS	123
8.6.	WORST-CASE BELOW 1 GHz.....	129
8.7.	WORST-CASE ABOVE 18 GHz	131
9.	AC POWER LINE CONDUCTED EMISSIONS.....	133
9.1.	EUT POWER BY AC/DC ADAPTER VIA USB CABLE	134
9.2.	EUT POWER BY HOST PC VIA USB CABLE	136

10. SETUP PHOTOS	138
----------------------------------	------------

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A1902

SERIAL NUMBER: C39TX005J954

DATE TESTED: MAY 25, 2017 – JULY 27, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 2	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:

CHHIN PANG
Senior Engineer
UL VERIFICATION SERVICES INC.

HUNG THAI
Test Engineer
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v04, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC: 22541-1)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC: 22541-2)
☐ Chamber C (IC:2324B-3)	☒ Chamber F (IC: 22541-3)
	☐ Chamber G (IC: 22541-4)
	☐ Chamber H (IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The equipment under Test is a mobile phone with GSM, GPRS, EGPRS, UMTS, LTE and TD-SCDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
UAT 1	Pmax	2402 - 2480	BLE 1M	20.26	106.17
	Plow			10.18	10.42
	Pmax		BLE 2M	20.13	103.04
	Plow			10.14	10.33
LAT 3	Pmax	2402 - 2480	BLE 1M	20.25	105.93
	Plow			10.17	10.40
	Pmax		BLE 2M	20.20	104.71
	Plow			10.08	10.19

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
2.4	UAT 1	LAT 3
	-2.37	-5.49

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 15.1.40.176.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, above 18GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations, X (Flatbed), Y (Landscape), and Z (Portrait), on both UAT 1 and LAT 3 antennas. In addition, the EUT was also investigated with and without AC/DC charger, headphones & laptop, it was determined that Y (Landscape) orientation was the worst-case orientation on both UAT 1 and LAT 3 without AC/DC charger, headphones & laptop. Therefore, all final radiated testing was performed with the EUT only in Y-orientation for 1 - 18GHz and 18 – 26GHz. And for 30-1000MHz EUT was tested with AC/DC charger.

Worst-case data rate as provided by the client and baseline scan was:

BLE: 1Mbps

BLE 1M mode has been verified to have the highest power.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna LAT 3 in the 2.4GHz BT and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Apple	A1344	T1580	NA
Laptop	Apple	A1278	C02HJ0A7DTY4	NA
DC power supply	Lambda	GEN 60-25	SCPV56329	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Shielded	1	N/A
2	USB	1	USB	Shielded	1	Laptop to EUT
3	AC	1	AC	Un-shielded	3	N/A
4	Aligator clip	1	minigrabber	Un-Shielded	1	DC power supply to EUT

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
NA						

I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A
2	USB	1	USB	Shielded	1	N/A

TEST SETUP

The EUT was tested connected to a host Laptop via USB cable adapter and SMA cable connected to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

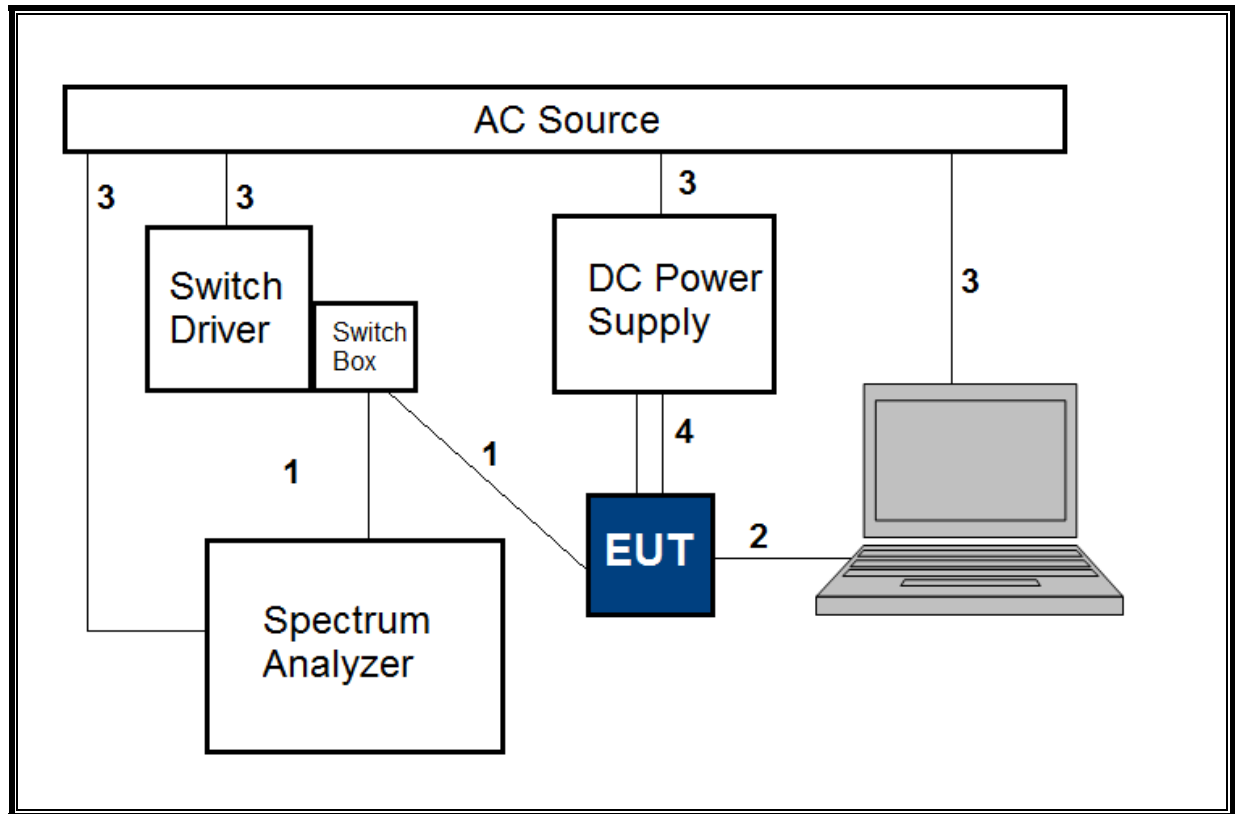

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

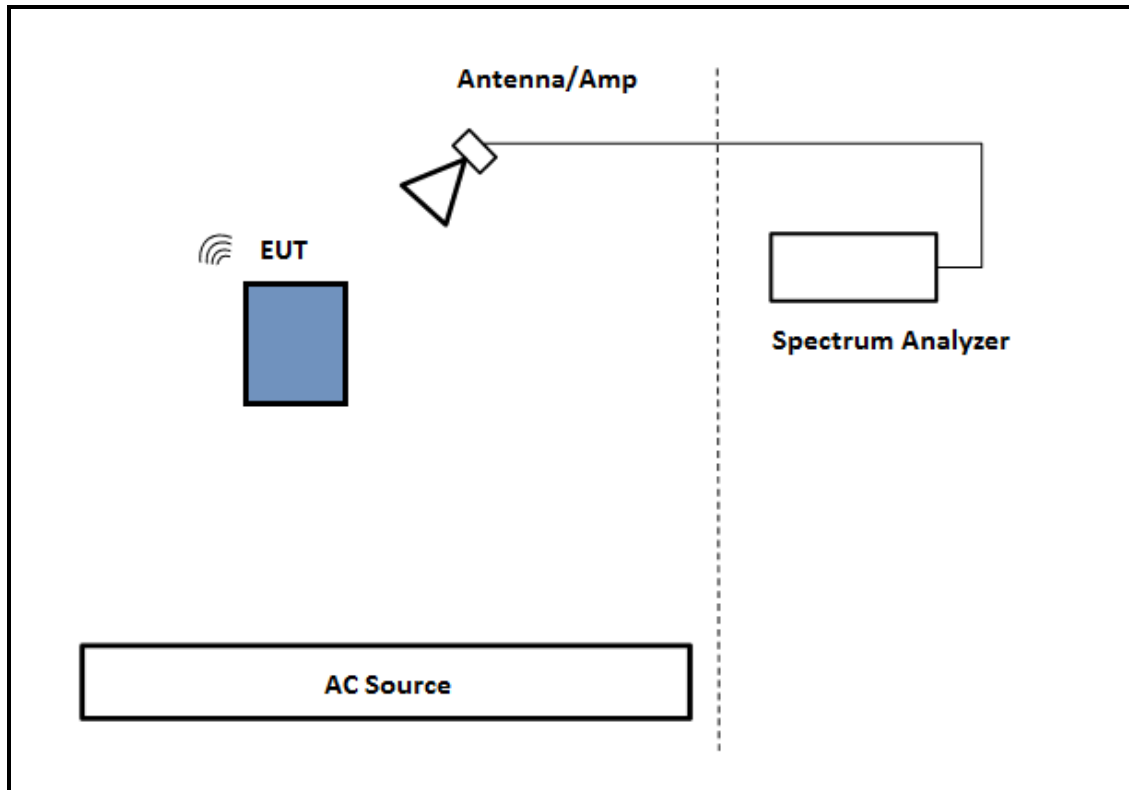

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was powered by AC/DC adapter. Test software exercised the EUT.


SETUP DIAGRAM

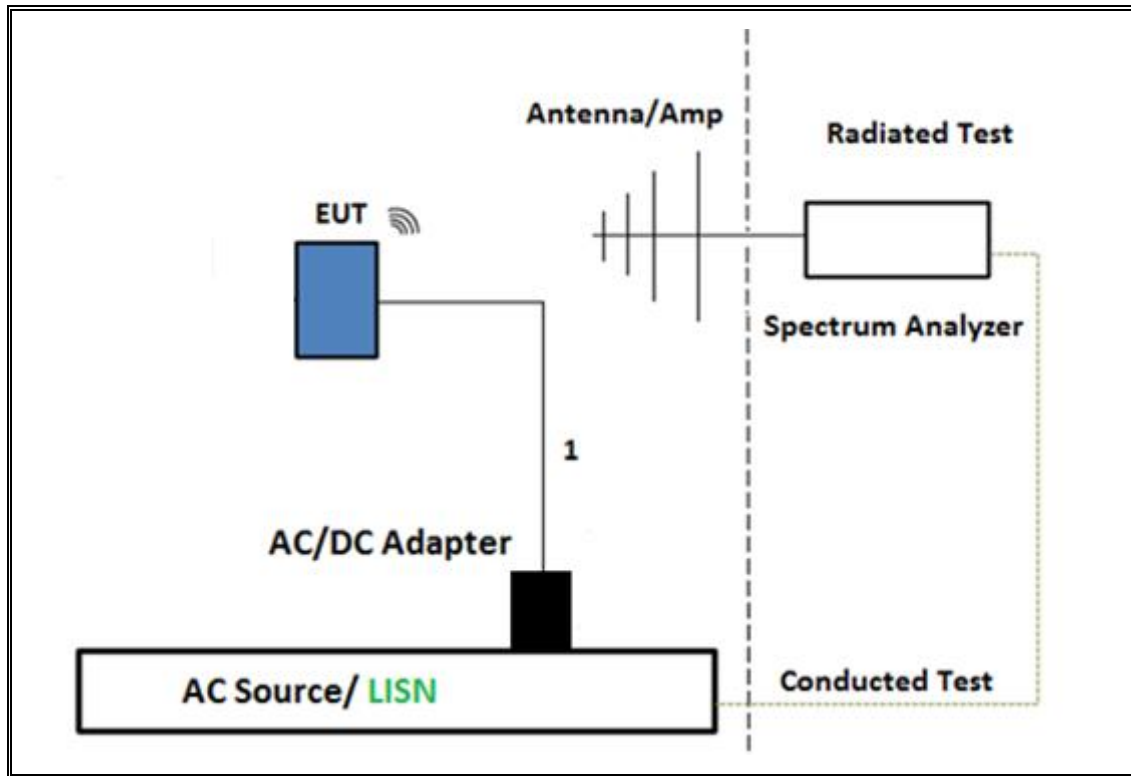

TEST SETUP- AC LINE CONDUCTED TEST (LAPTOP CONFIGURATION)

The EUT was tested connected to a host Laptop via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

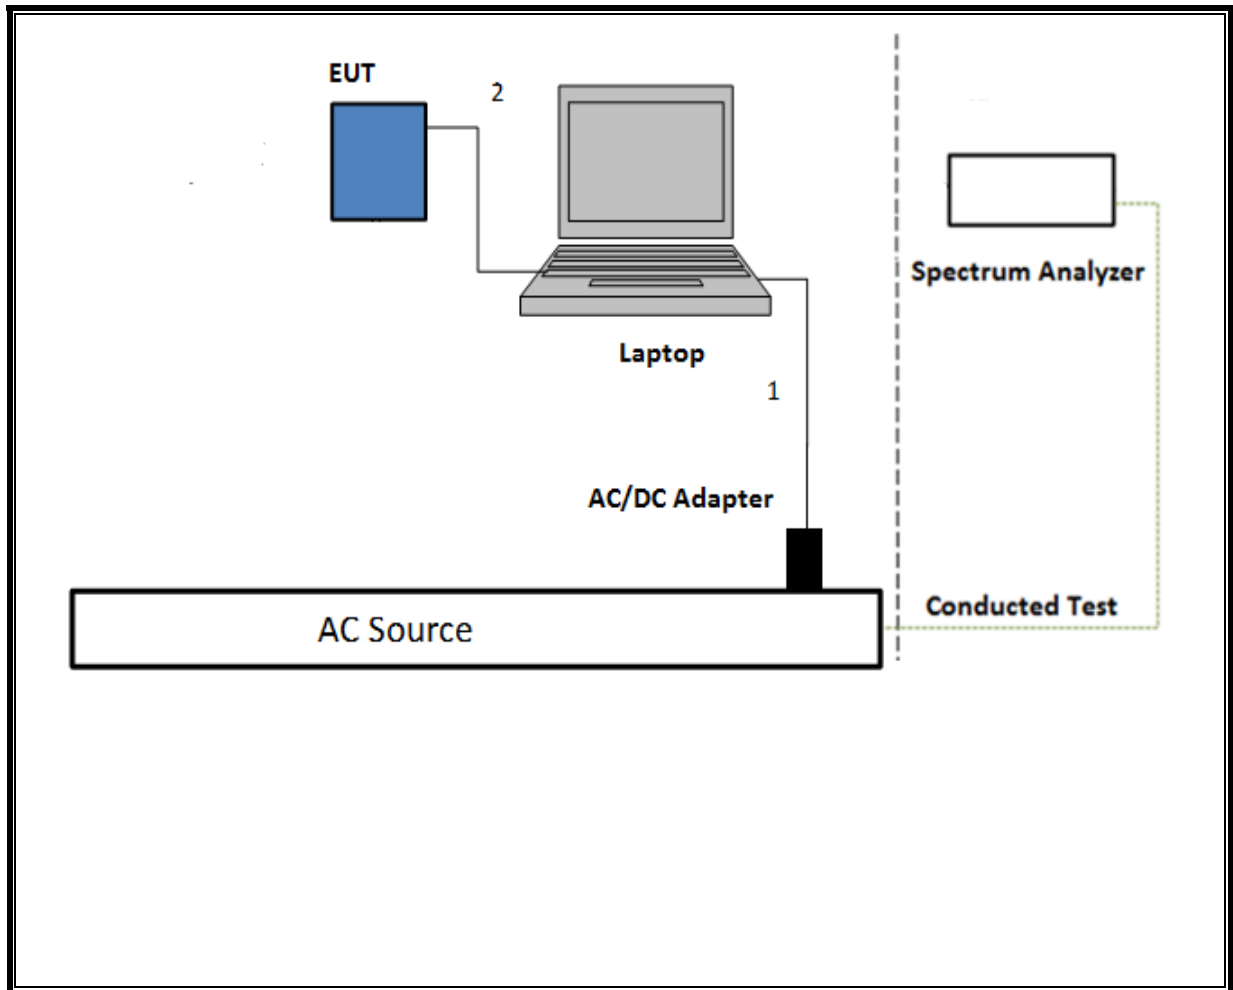

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	3/28/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T243	10/11/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T741	11/29/2017
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	6/20/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1113	12/20/2017
*Power Meter, P-series single channel	Keysight	N1912A	T1273	07/08/2017
Power Sensor	Keysight	N1921A	T750	10/1/2017
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	6/16/2017
Spectrum Analyzer, 40GHz	Agilent	8564E	T106	9/7/2017
*Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T459	06/13/2017
*Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	7/5/2017
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	1/6/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
Power Cable, Line Conducted Emissions	UL	PG1	T861	9/1/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

NOTE: *testing is completed before equipment calibration expiration date.

7. ANTENNA PORT TEST RESULTS

7.1. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v04, Section 8.1.

Output Power: KDB 558074 D01 v04, Section 9.1.3.

Power Spectral Density: KDB 558074 D01 v04, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v04, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v04, Section 12.1.

Band-edge: KDB 558074 D01 v04, Section 12.1.

Conducted line emissions: C63.10, Clause 6.2

7.2. ON TIME, DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (khz)
BLE Pmax	133.1	133.1	1.000	100%	0.00	0.010
BLE Plow	133.1	133.1	1.000	100%	0.00	0.010

DUTY CYCLE PLOTS

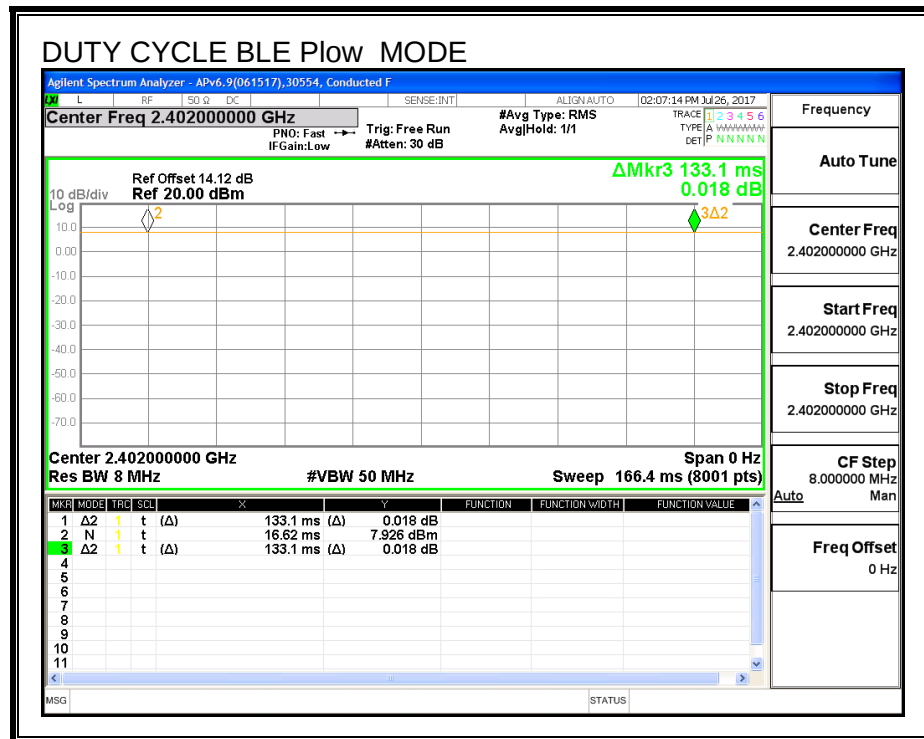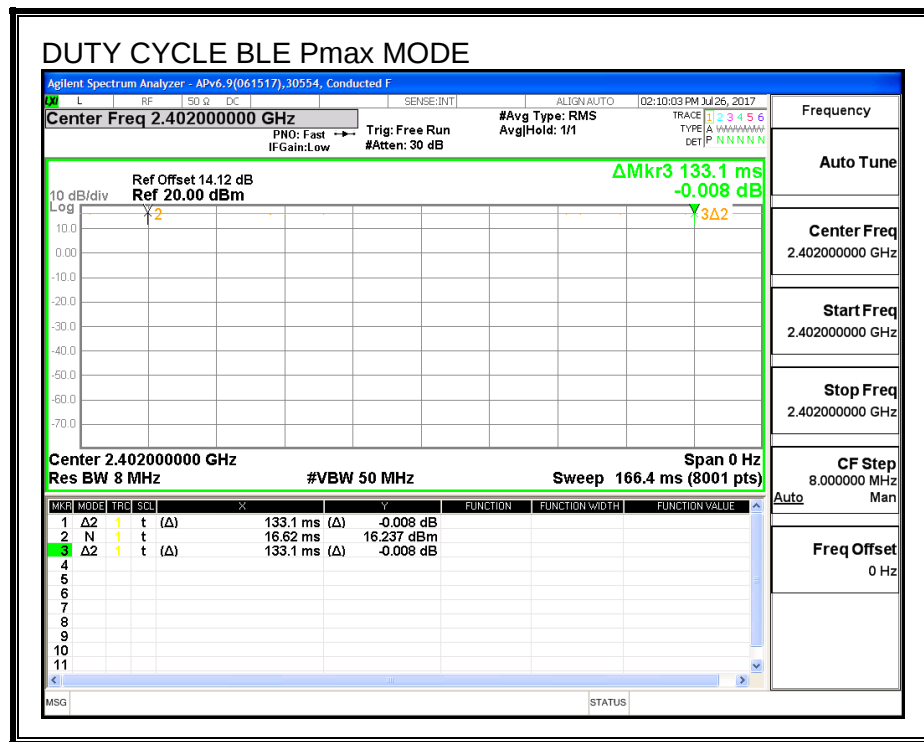

7.3. UAT 1 BLE 1M Pmax

7.3.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)


IC RSS-247 (5.2) (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.694	0.5
Middle	2440	0.722	0.5
High	2480	0.708	0.5

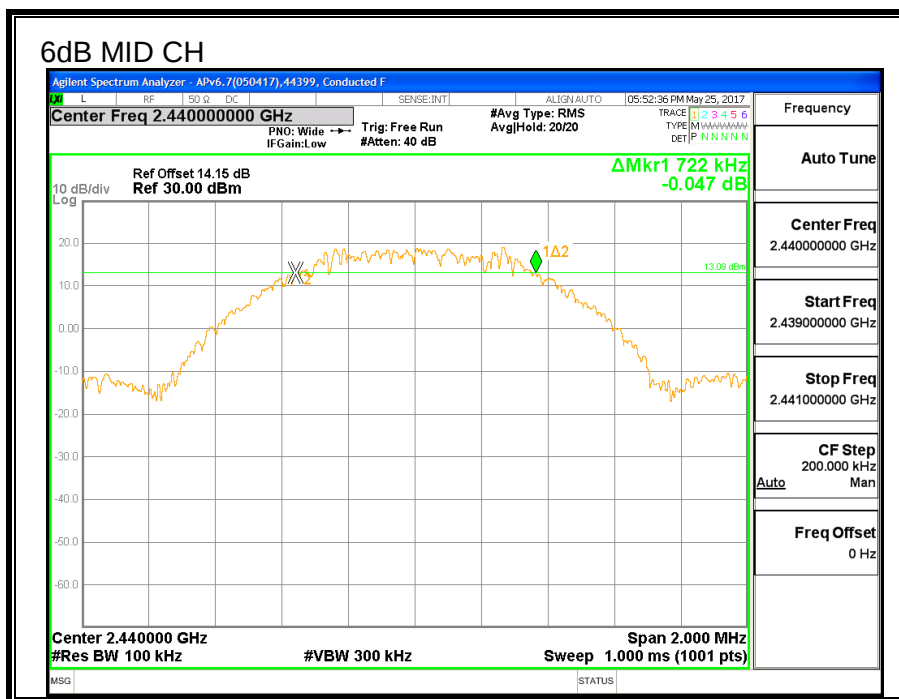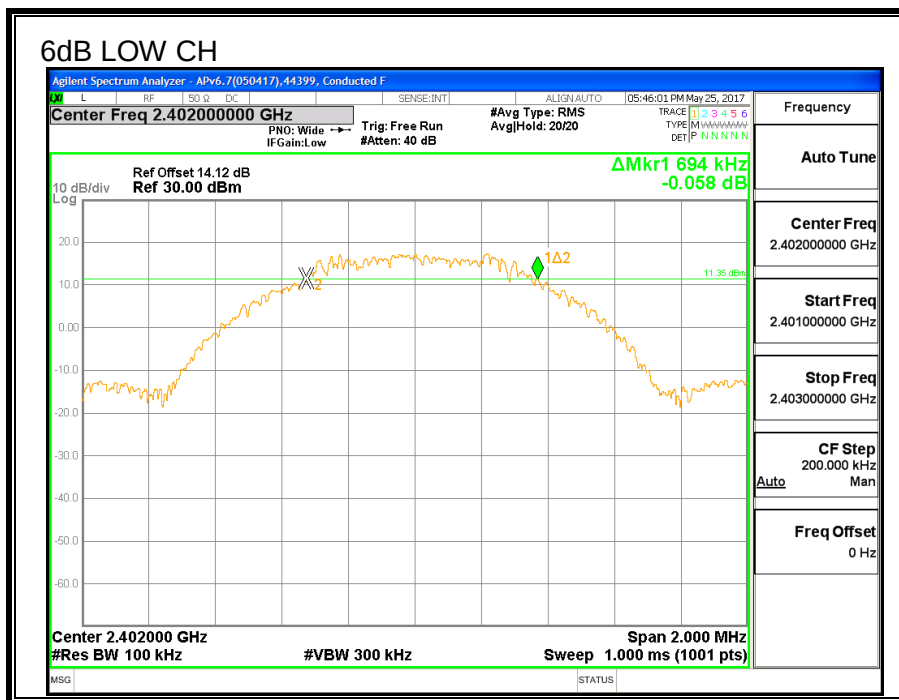

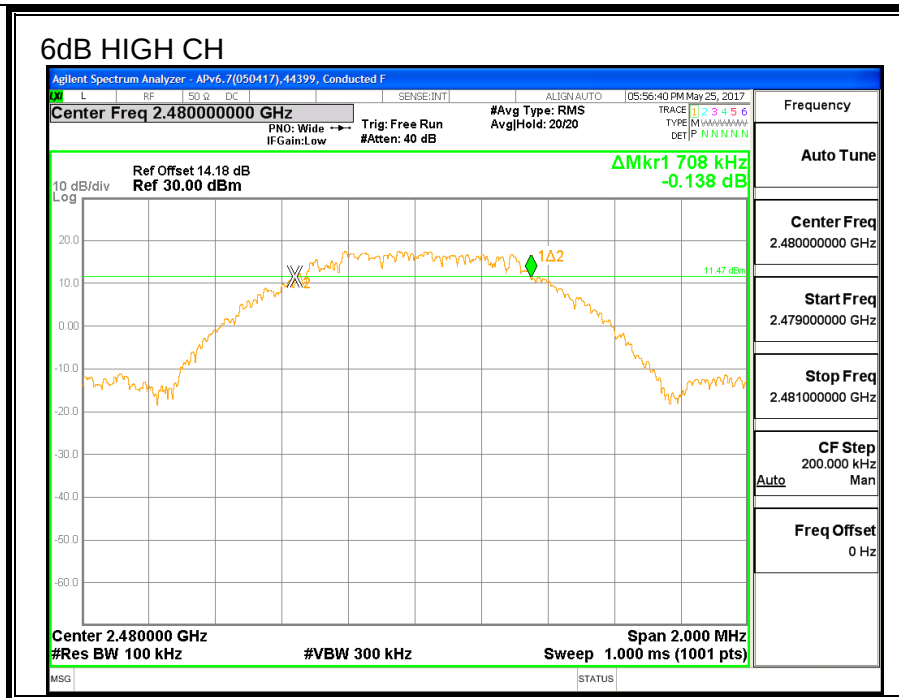

7.3.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


Test Procedure

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.054
Middle	2440	1.056
High	2480	1.058

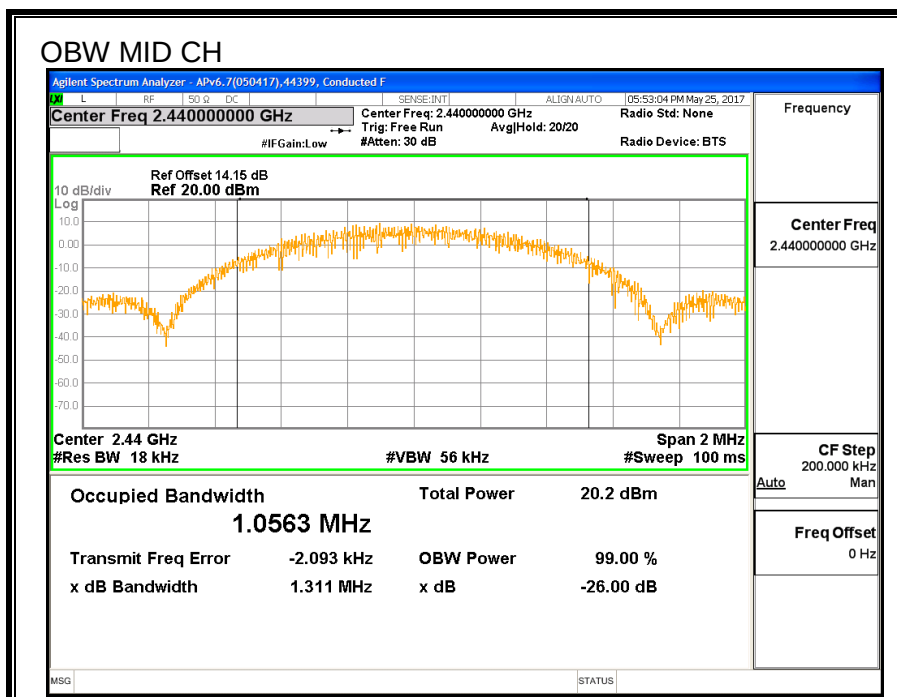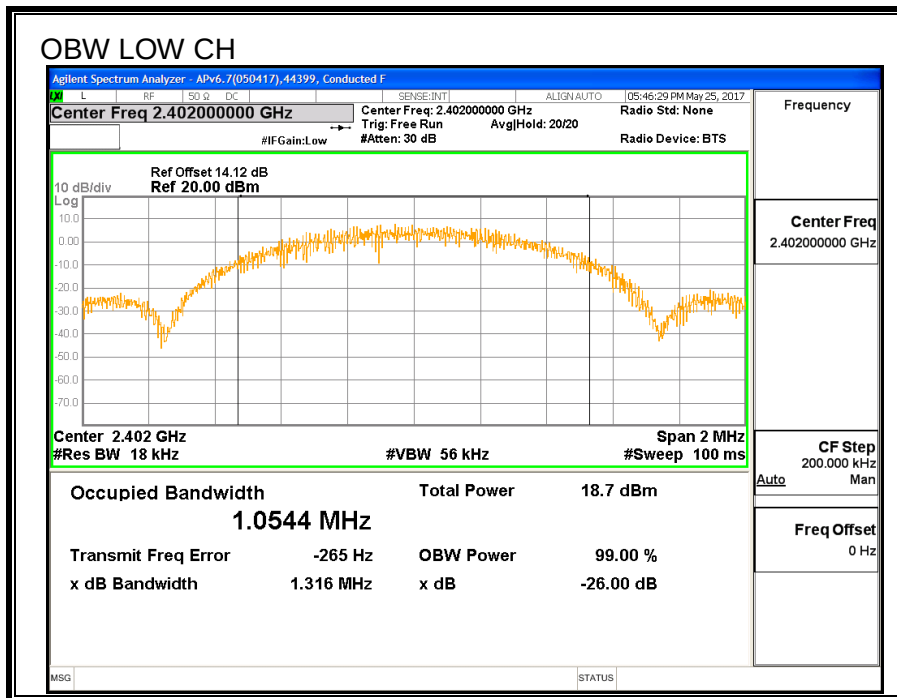

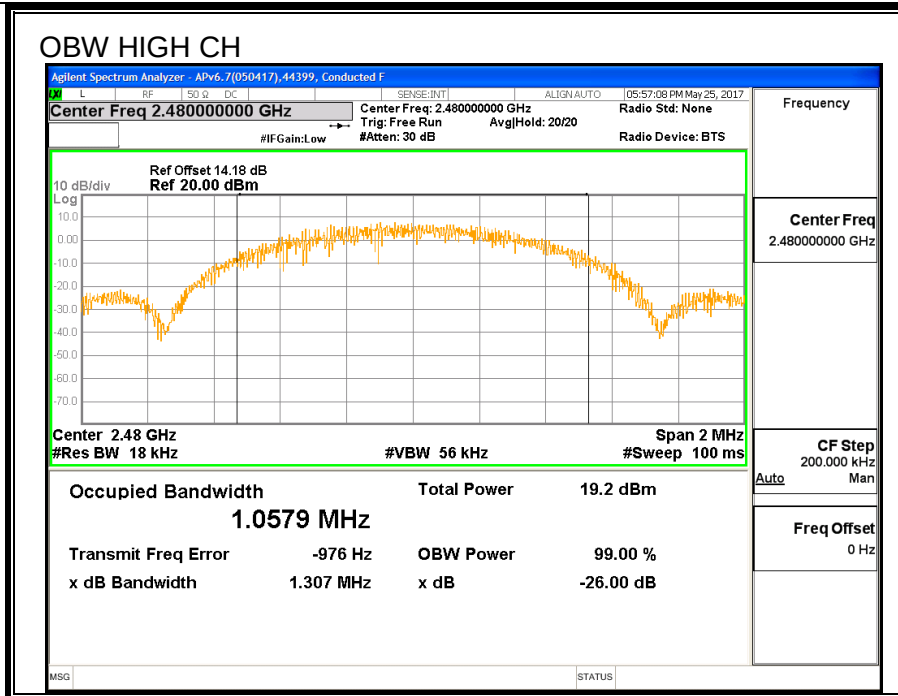

7.3.3. AVERAGE POWER

ID:	30606	Date:	7/27/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	19.45
Middle	2440	19.92
High	2480	19.77

7.3.4. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.78	30	-10.22
Middle	2440	20.26	30	-9.74
High	2480	20.09	30	-9.91

7.3.5. POWER SPECTRAL DENSITY

LIMITS



FCC §15.247 (e)


IC RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.2	8	-5.80
Middle	2440	3.74	8	-4.26
High	2480	2.71	8	-5.29

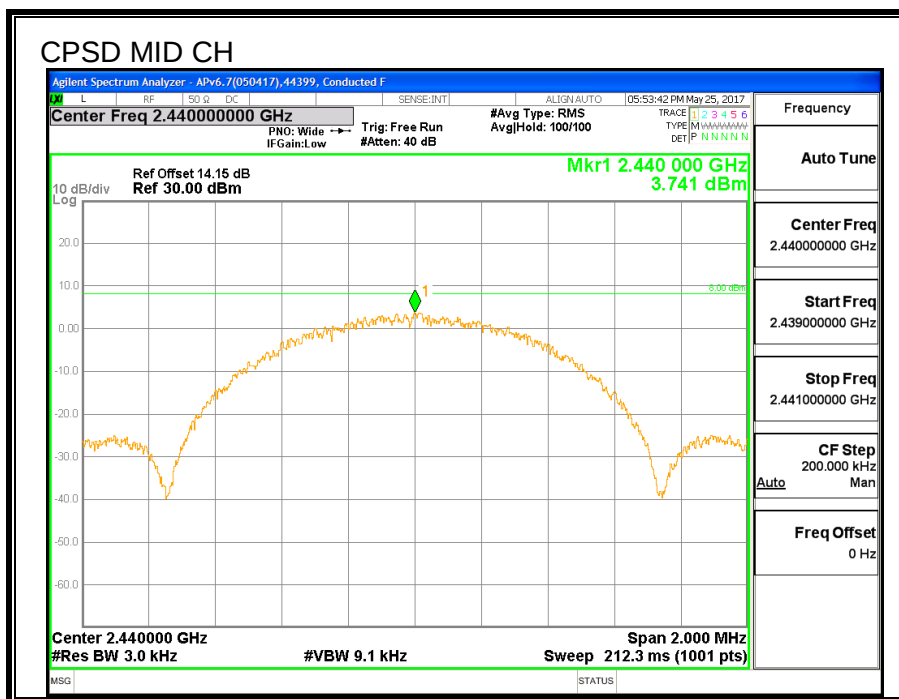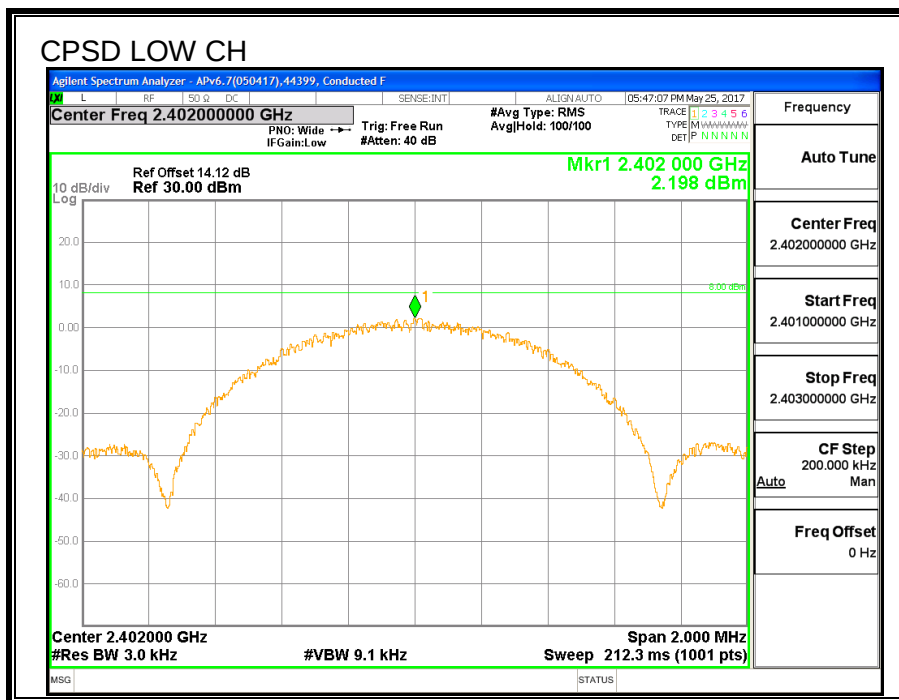

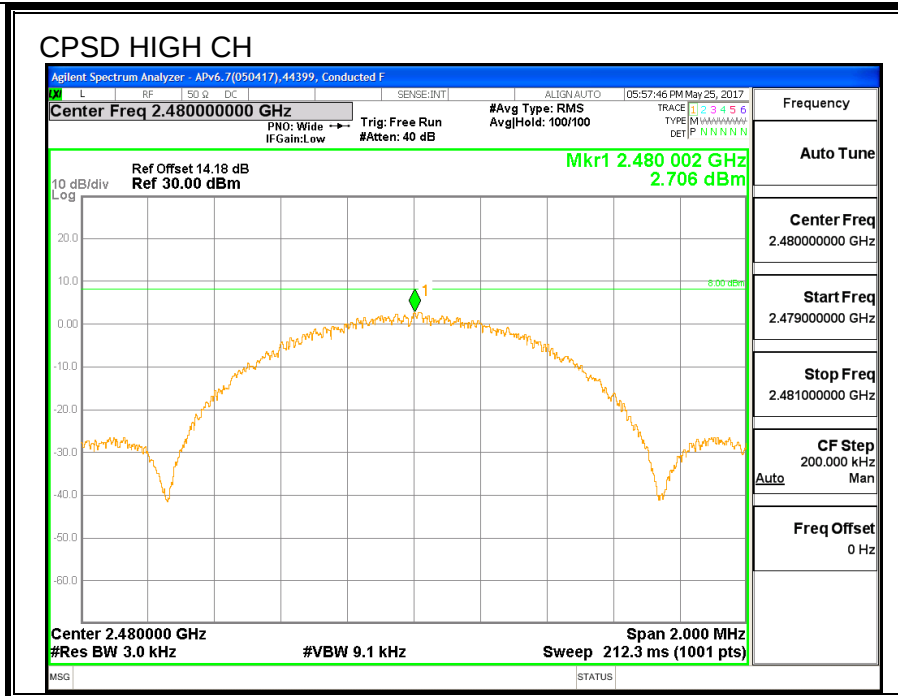

7.3.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)


IC RSS-247 (5.5)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


RESULTS

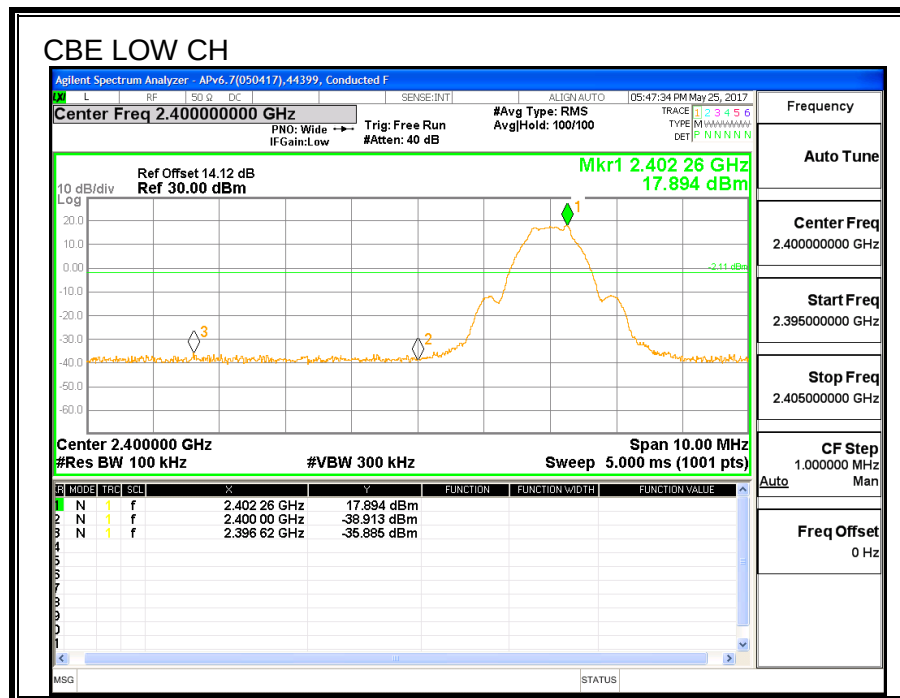


CBE MID CH

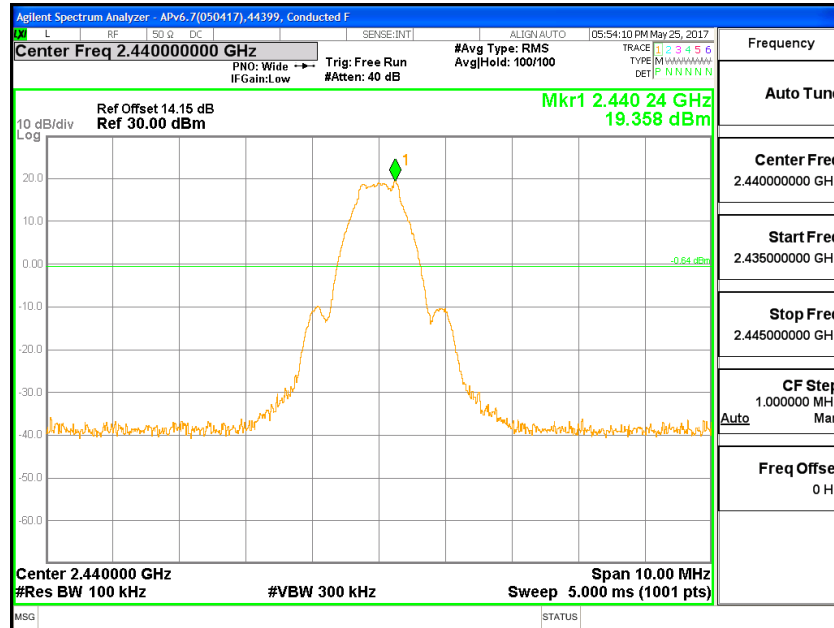


CBE HIGH CH

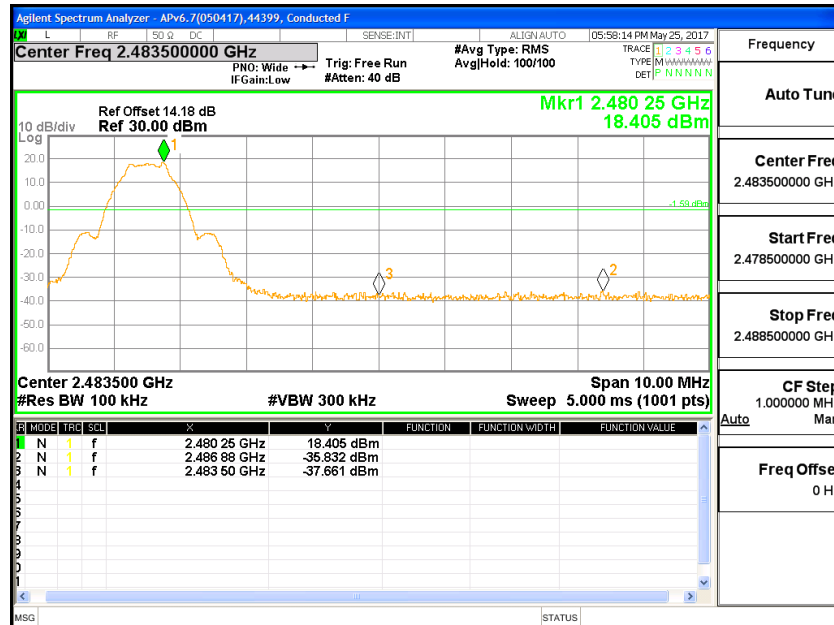


CSPUR LOW CH

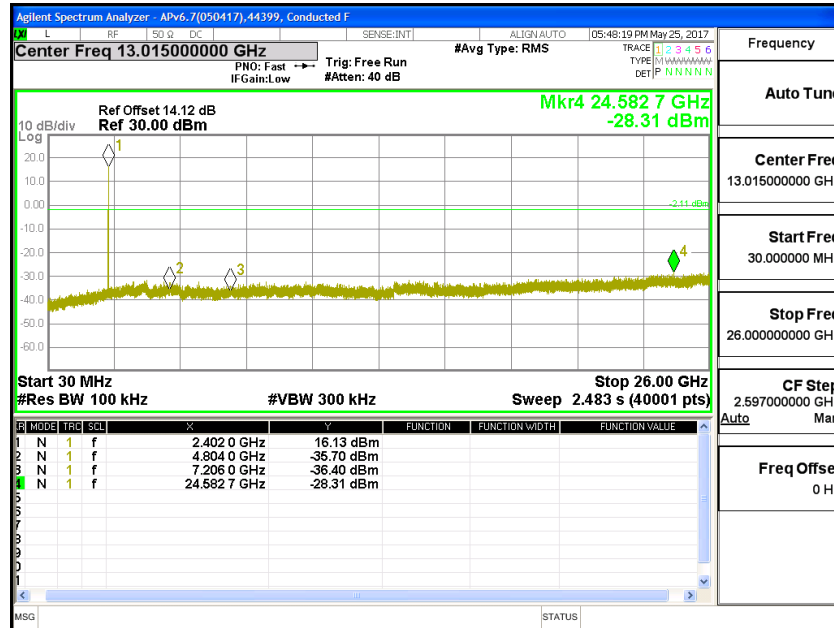

CSPUR MID CH

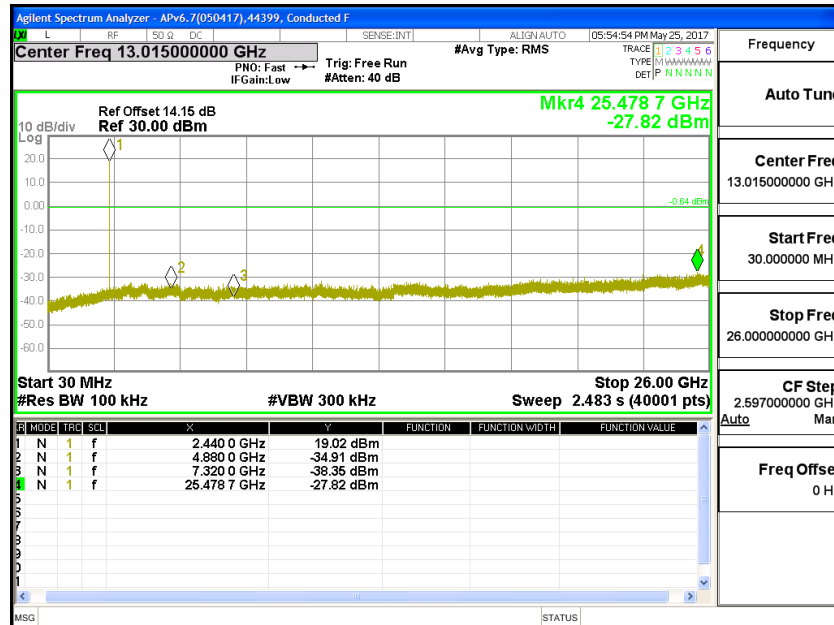

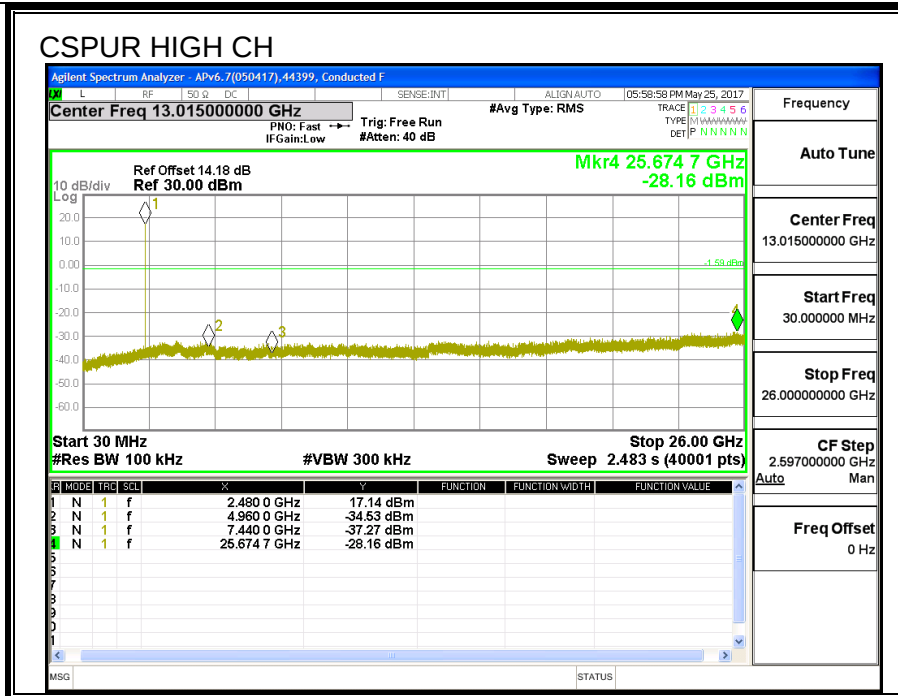

7.4. UAT 1 BLE 1M Plow

7.4.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)


IC RSS-247 (5.2) (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.73	0.5
Middle	2440	0.664	0.5
High	2480	0.748	0.5

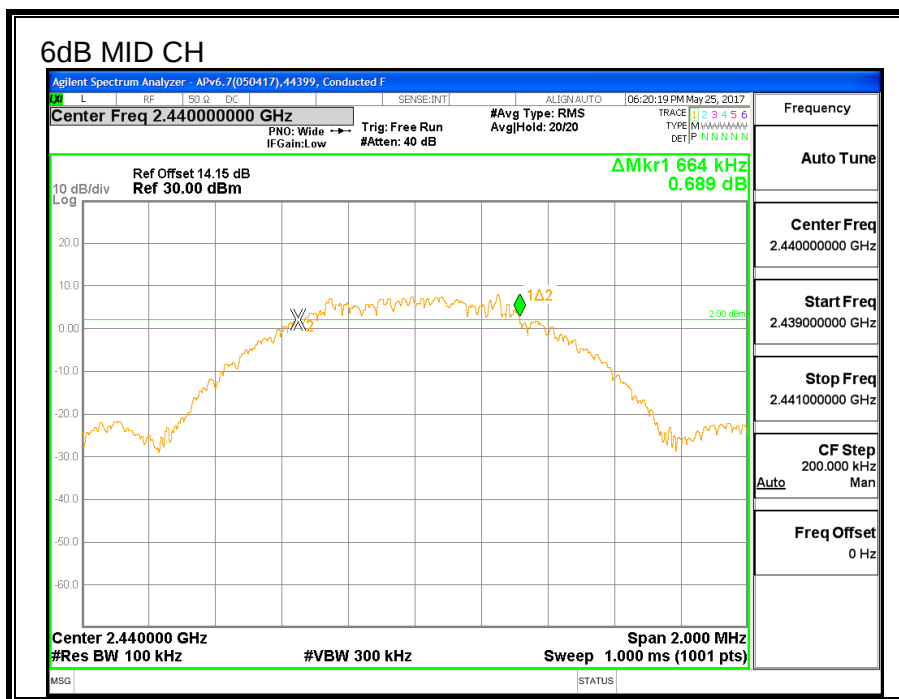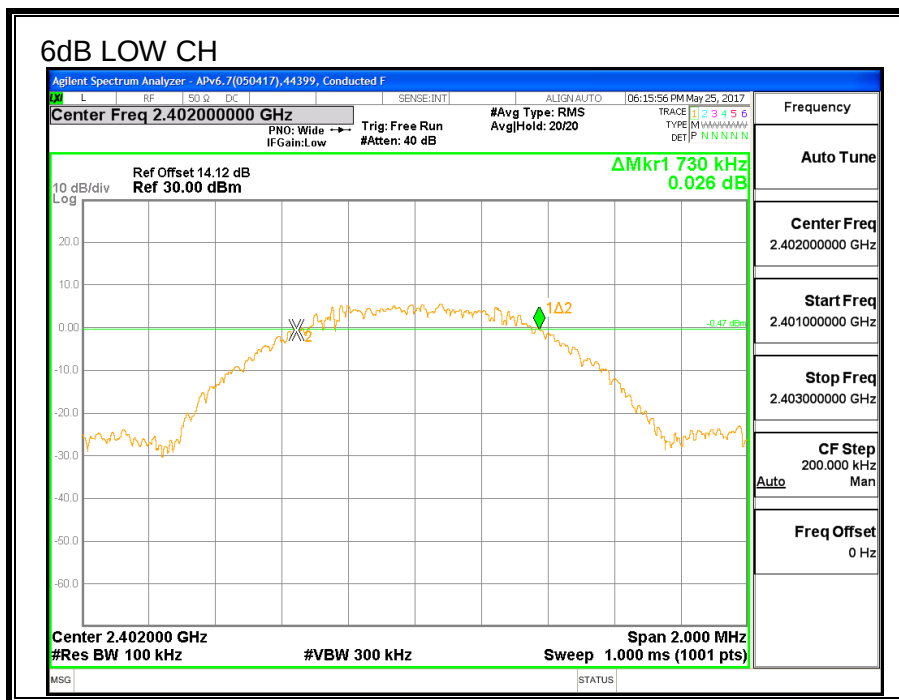

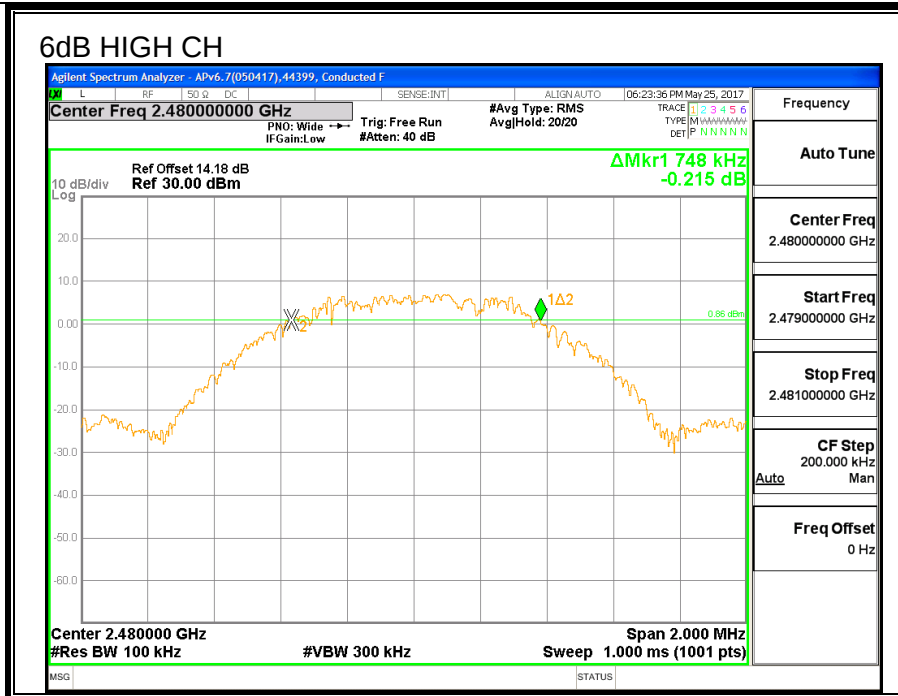

7.4.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


Test Procedure

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.059
Middle	2440	1.054
High	2480	1.056

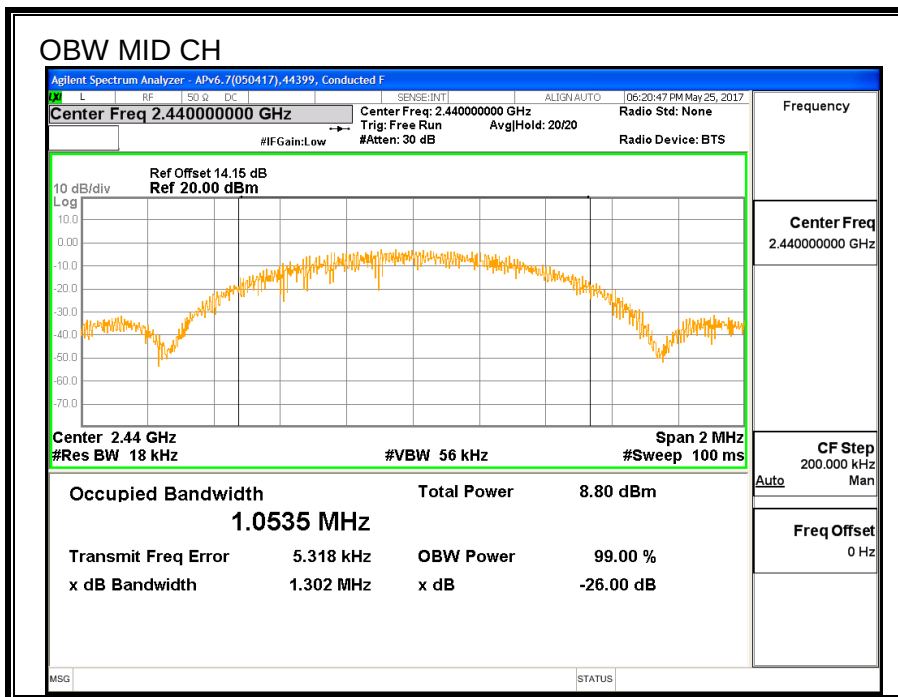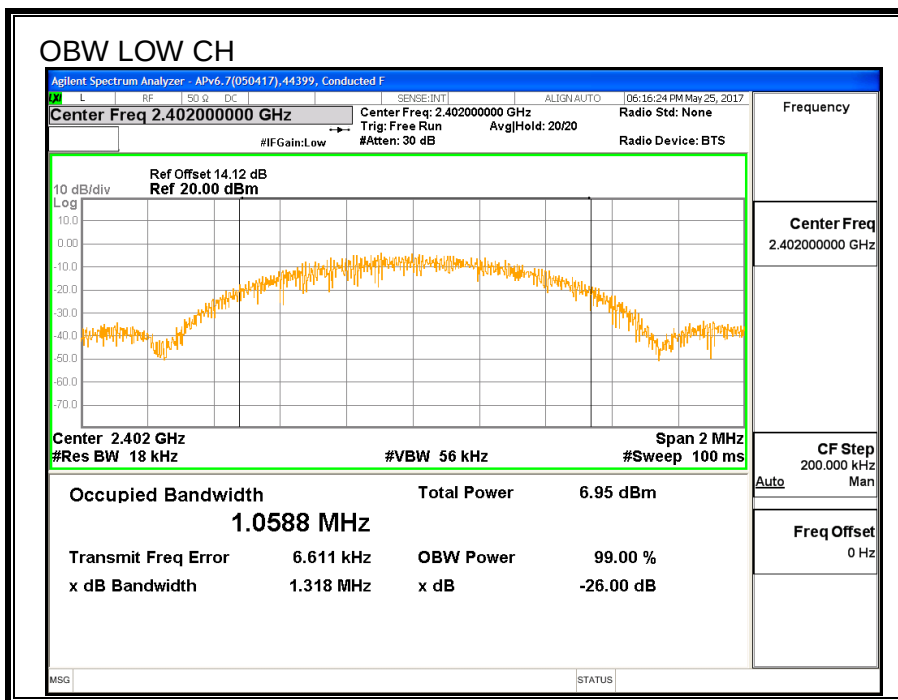

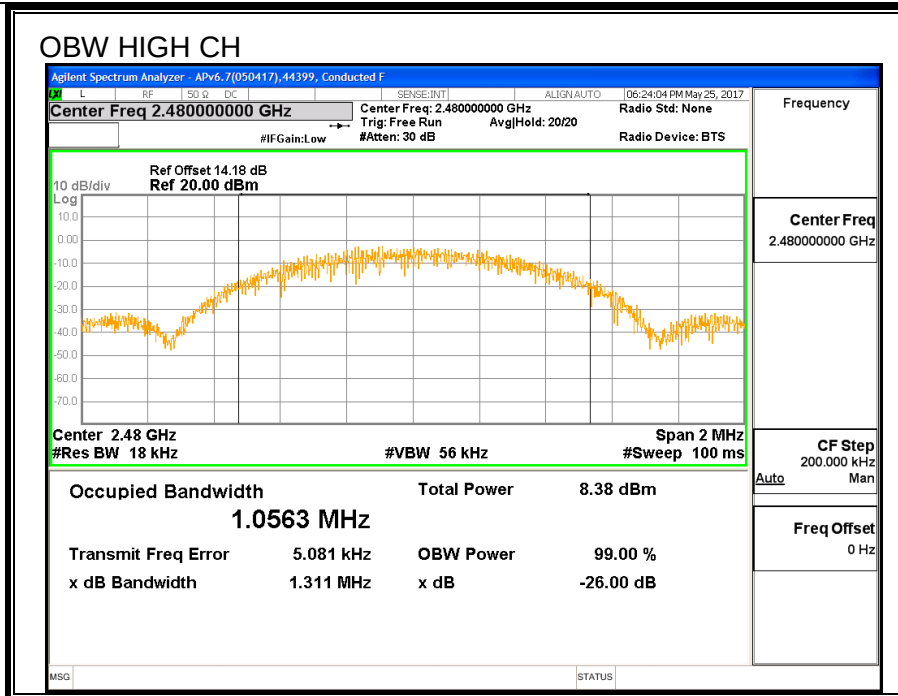

7.4.3. AVERAGE POWER

ID:	30606	Date:	7/27/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	9.21
Middle	2440	9.84
High	2480	9.80

7.4.4. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.54	30	-20.46
Middle	2440	10.18	30	-19.82
High	2480	10.12	30	-19.88

7.4.5. POWER SPECTRAL DENSITY

LIMITS



FCC §15.247 (e)


IC RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-9.549	8	-17.549
Middle	2440	-7.648	8	-15.648
High	2480	-8.096	8	-16.096

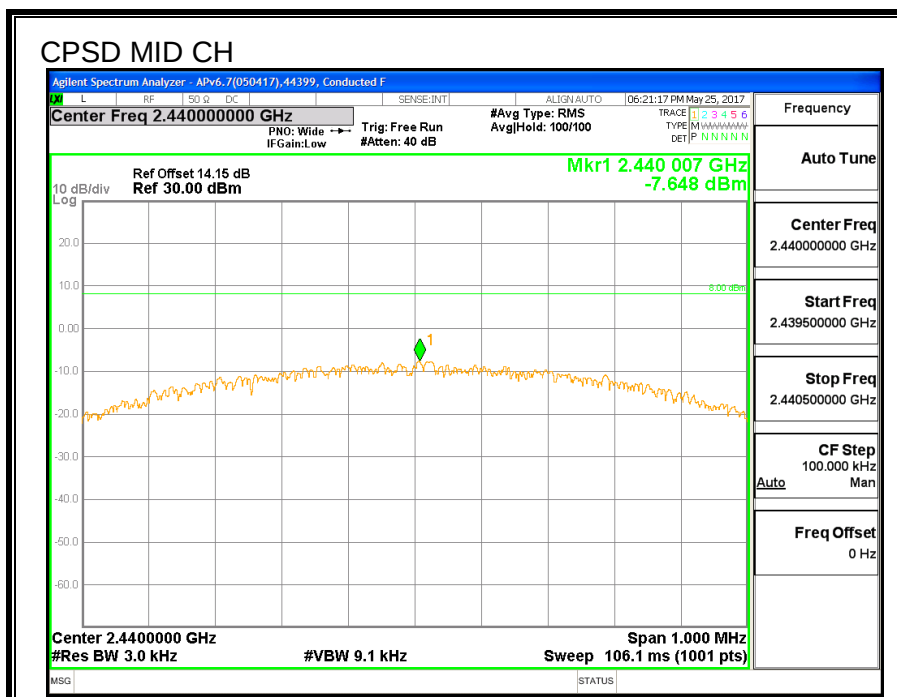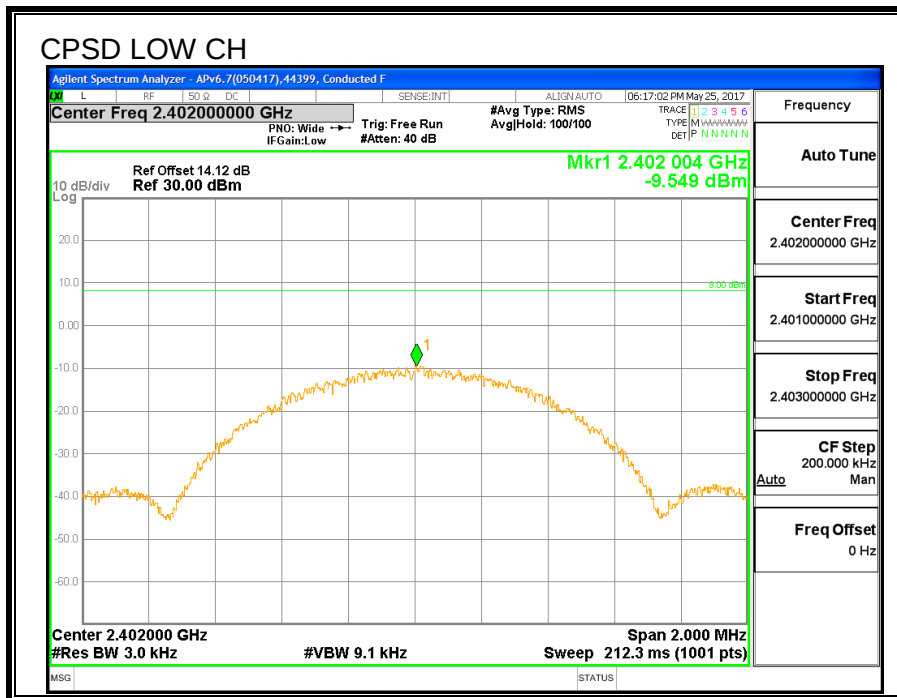

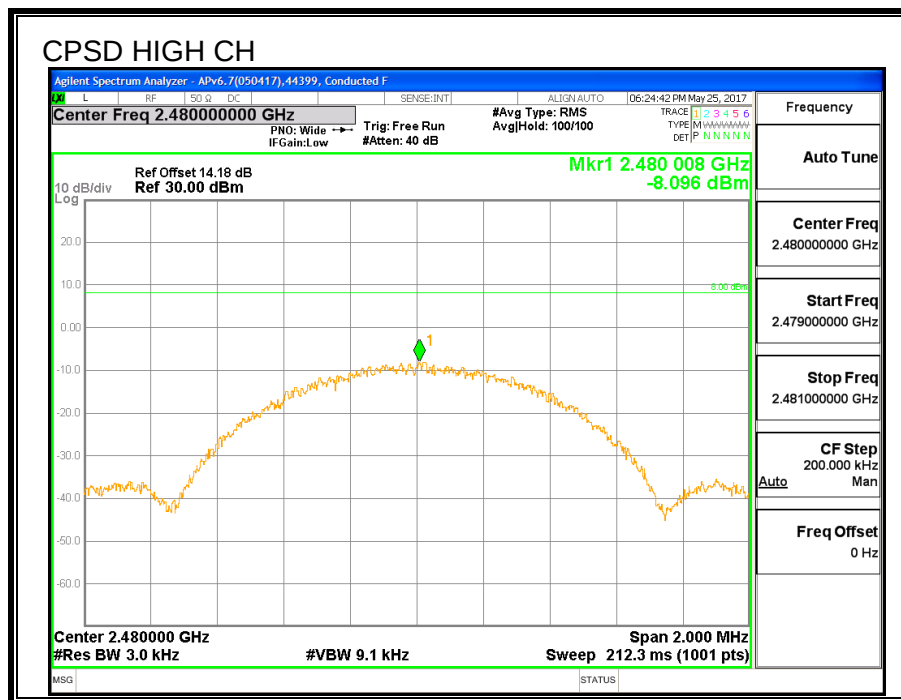

7.4.6. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)


IC RSS-247 (5.5)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


RESULTS

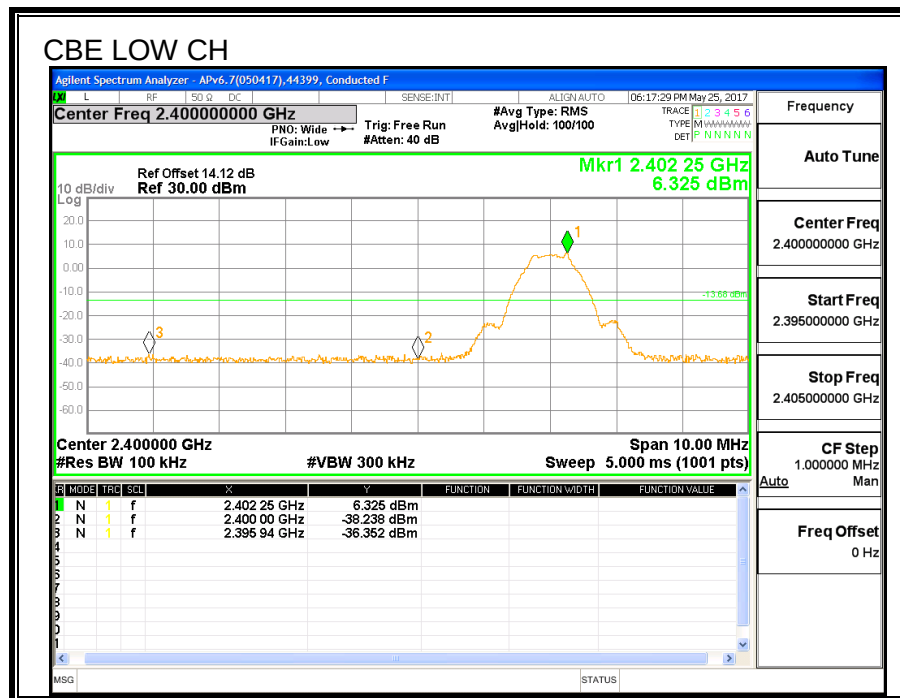


CBE MID CH

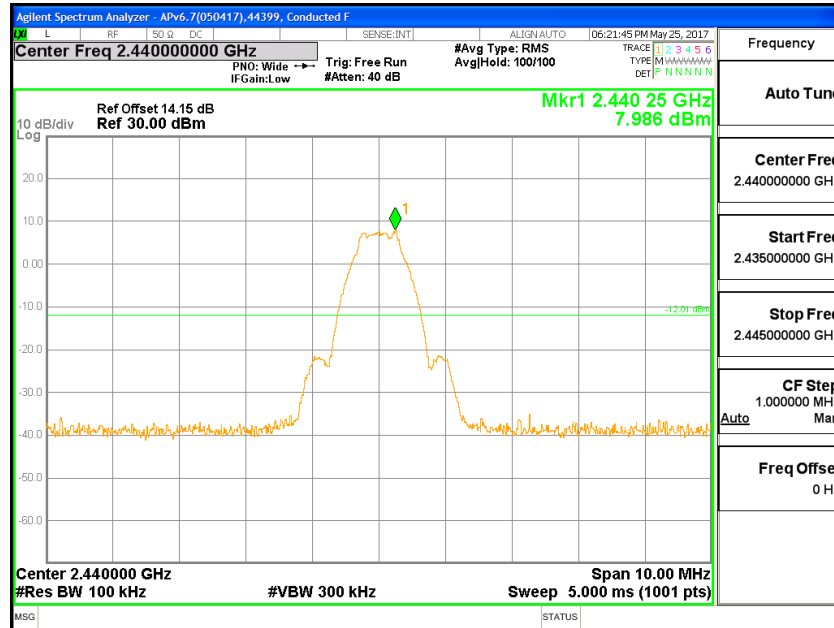


CBE HIGH CH

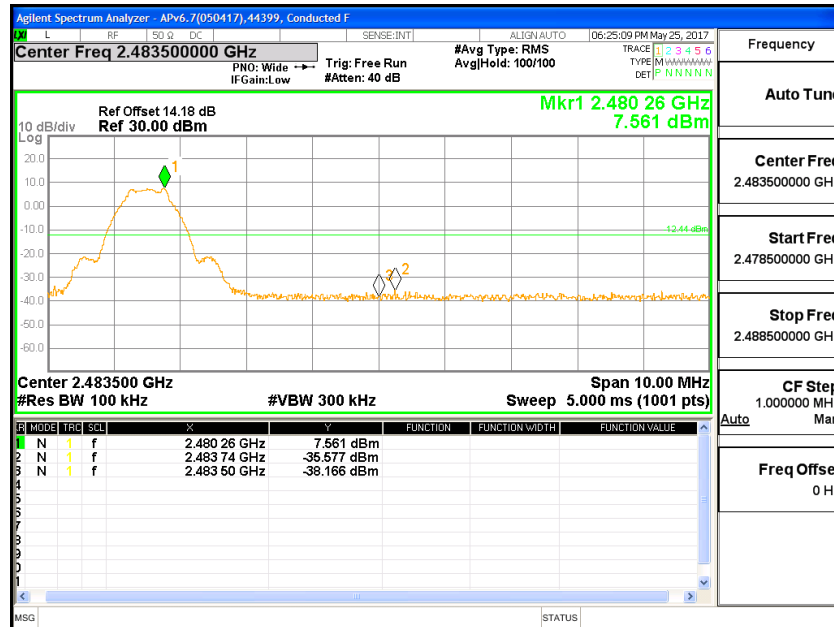


CSPUR LOW CH

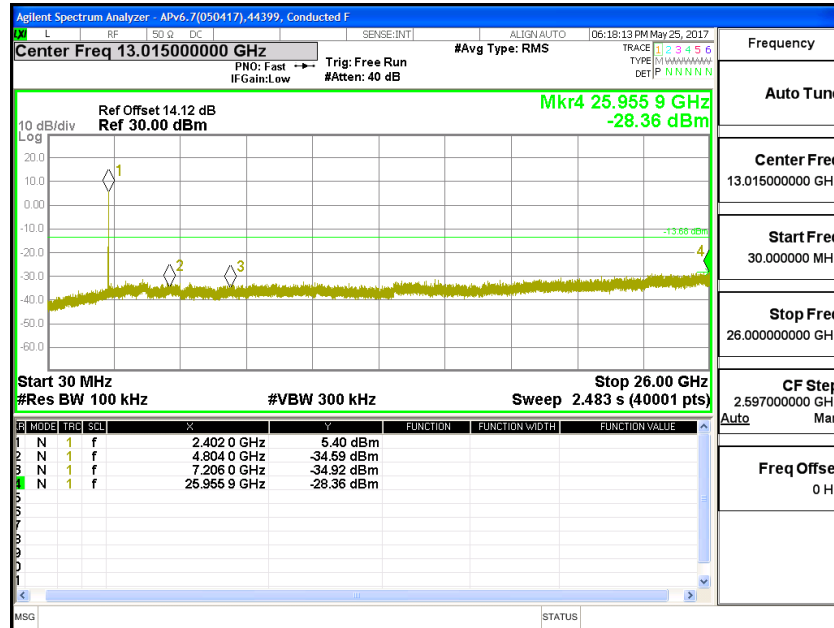

CSPUR MID CH

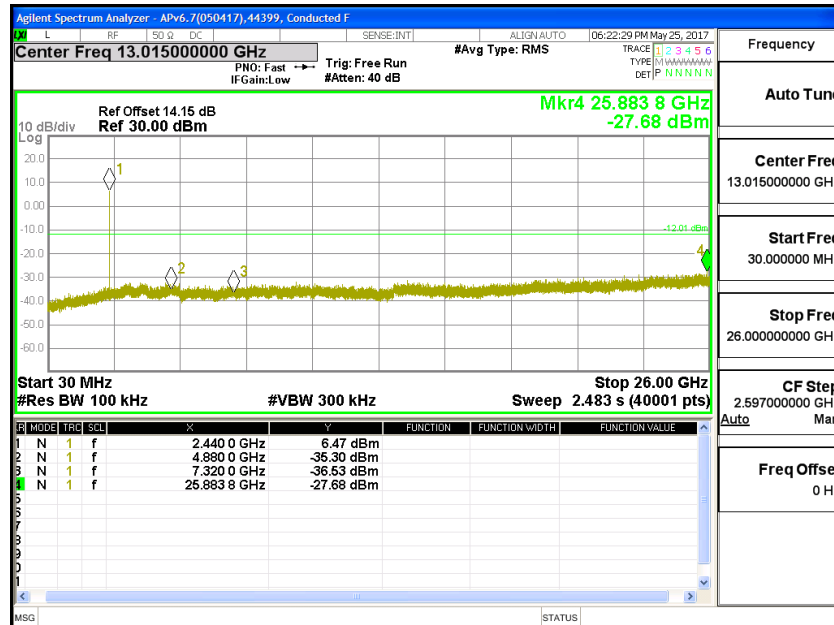

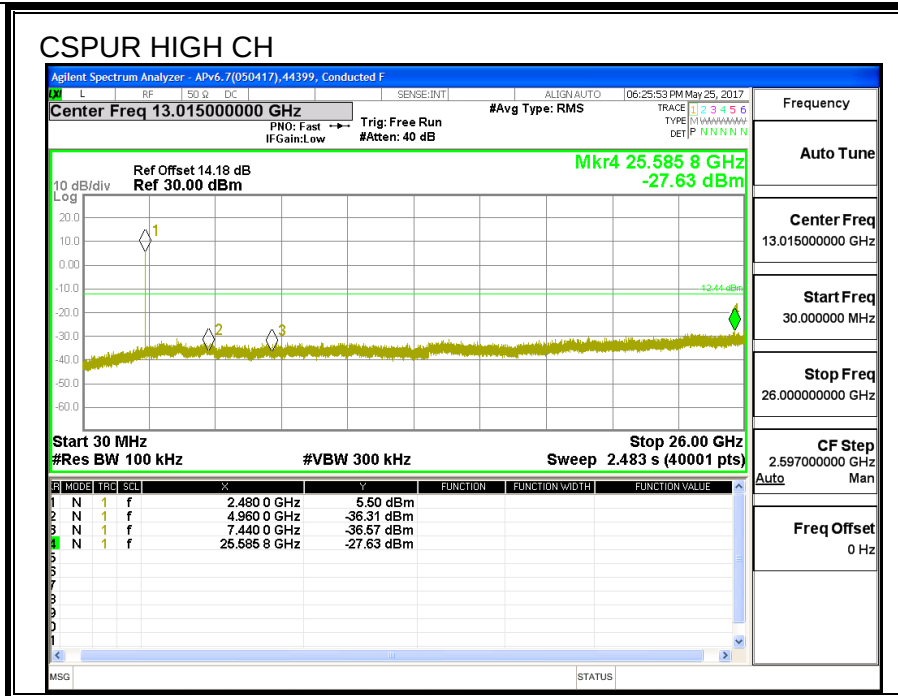

7.5. UAT 1 BLE 2M Pmax

7.5.1. AVERAGE POWER

ID:	30606	Date:	7/27/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	19.40
Middle	2440	19.79
High	2480	19.66

7.5.2. OUTPUT POWER

ID:	30606	Date:	7/27/2017
------------	-------	--------------	-----------

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a broadband Peak/average RF power meter

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.73	30	-10.27
Middle	2440	20.13	30	-9.87
High	2480	19.98	30	-10.02

7.6. UAT 1 BLE 2M Plow

7.6.1. AVERAGE POWER

ID:	30606	Date:	7/27/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	9.18
Middle	2440	9.80
High	2480	9.77

7.6.2. OUTPUT POWER

ID:	30606	Date:	7/27/2017
------------	-------	--------------	-----------

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a broadband Peak/average RF power meter

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.51	30	-20.49
Middle	2440	10.14	30	-19.86
High	2480	10.09	30	-19.91

7.7. LAT 3 BLE 1M Pmax

7.7.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)


IC RSS-247 (5.2) (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.724	0.5
Middle	2440	0.678	0.5
High	2480	0.708	0.5

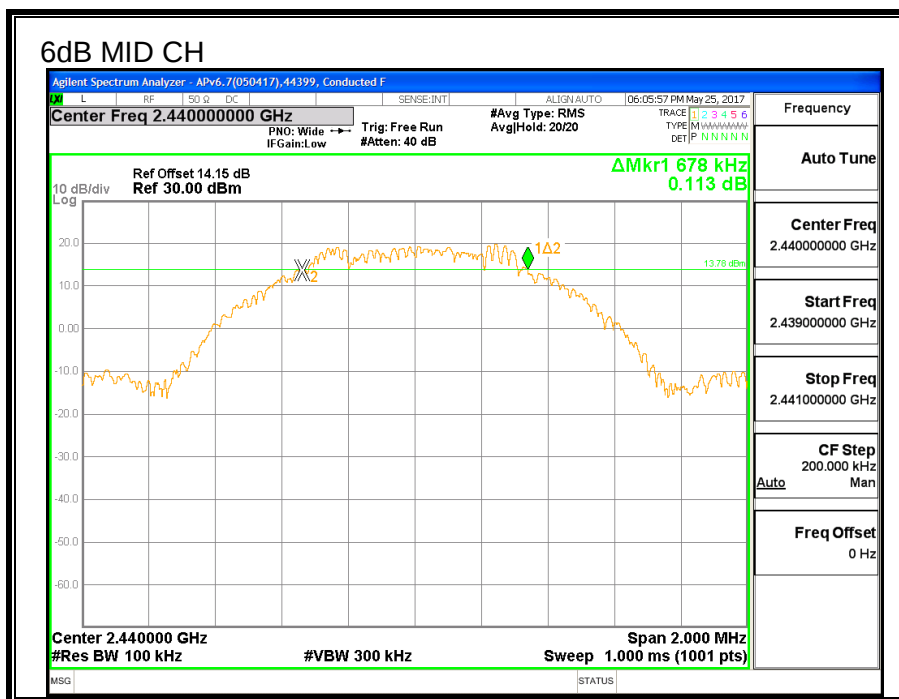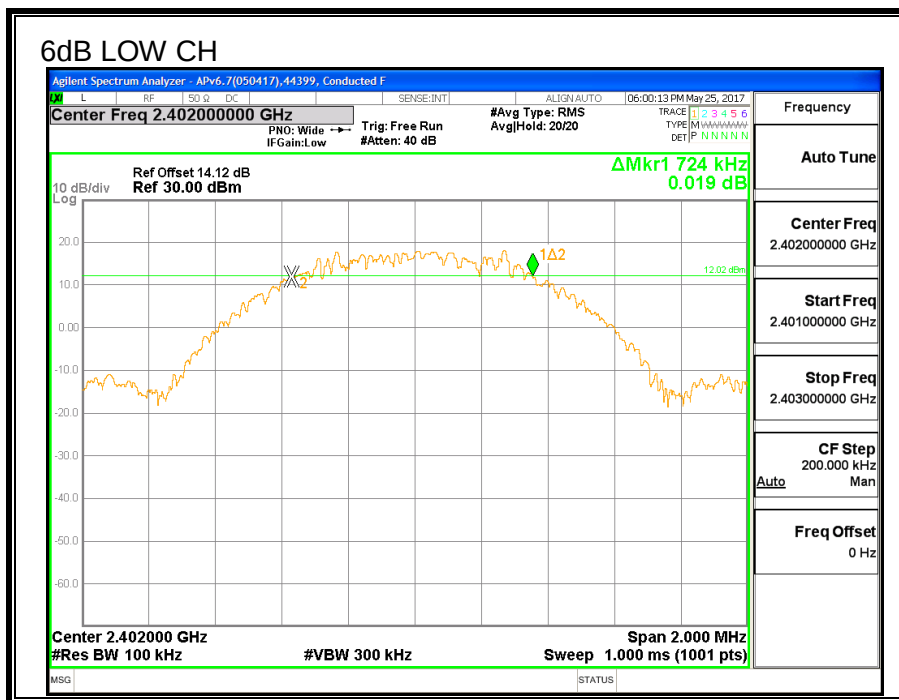

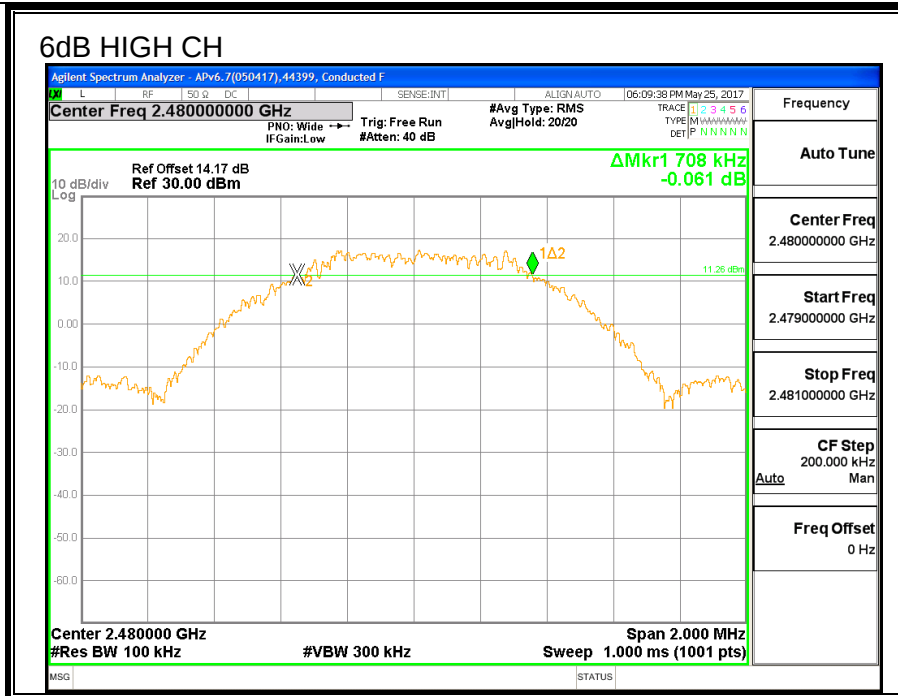

7.7.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


Test Procedure

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.055
Middle	2440	1.057
High	2480	1.055

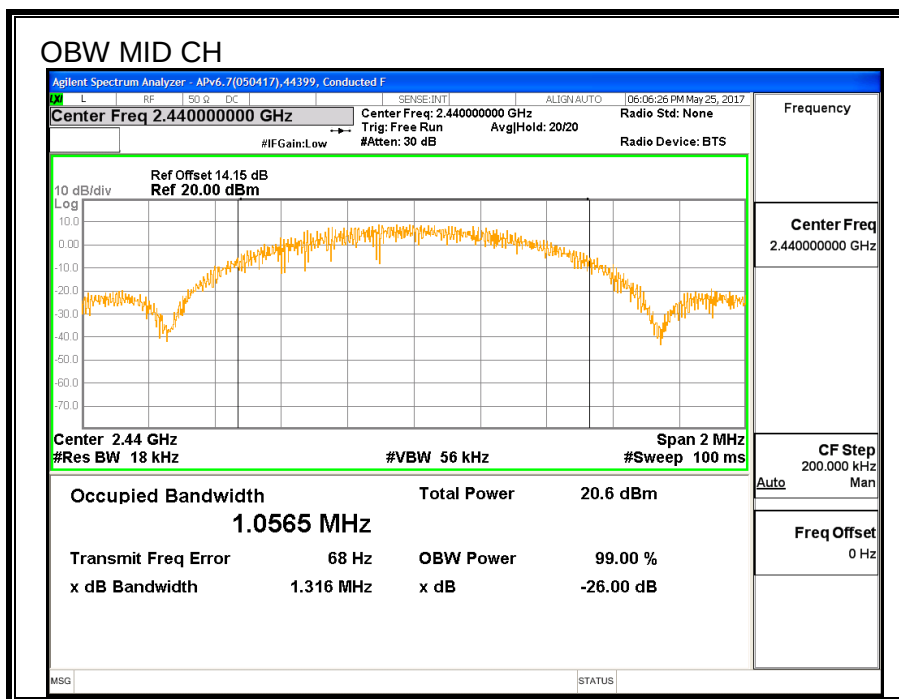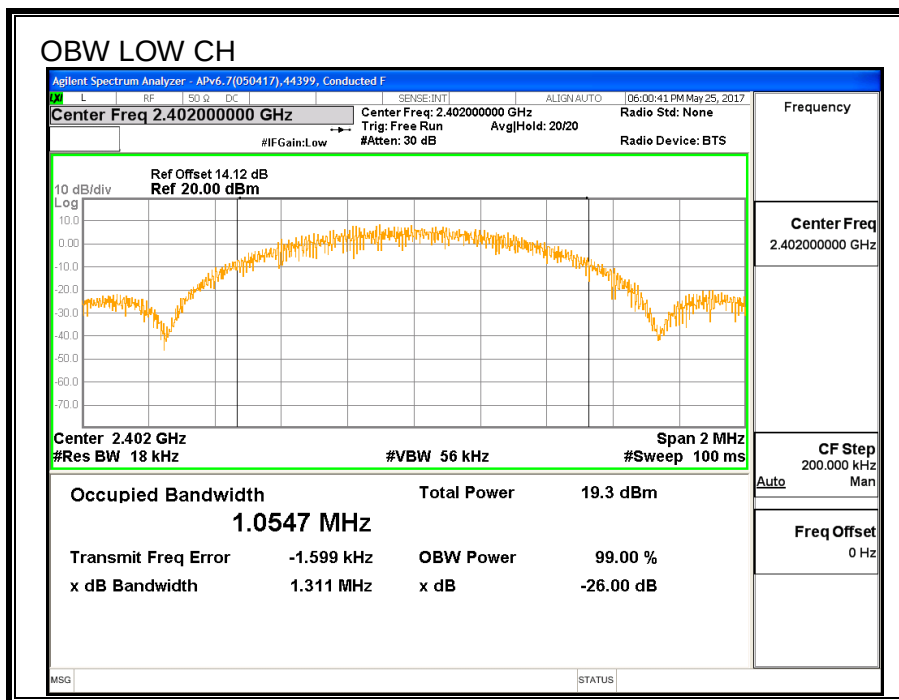

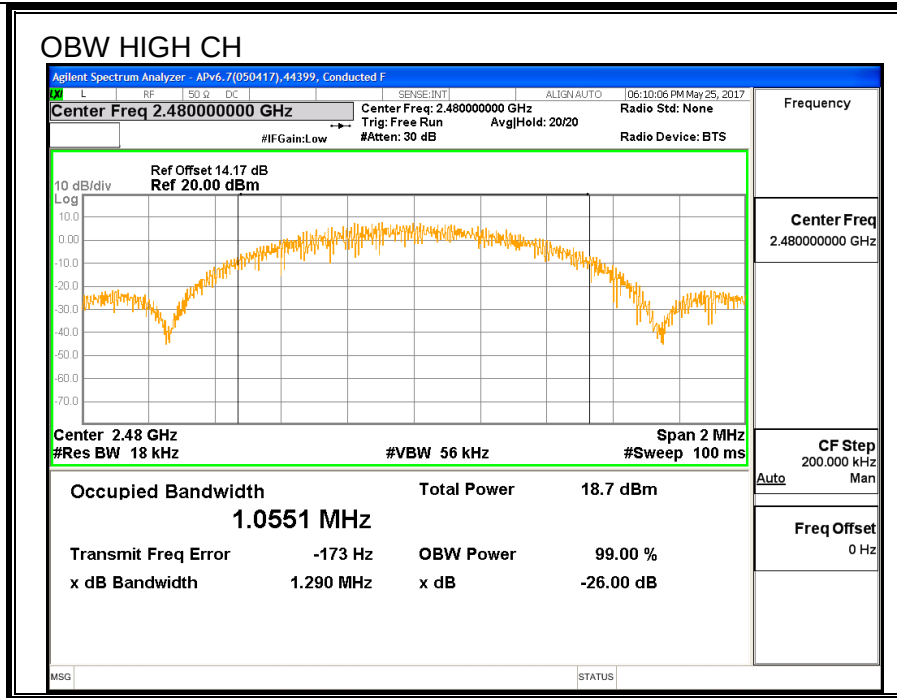

7.7.3. AVERAGE POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	19.69
Middle	2440	19.91
High	2480	19.84

7.7.4. OUTPUT POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.02	30	-9.98
Middle	2440	20.25	30	-9.75
High	2480	20.16	30	-9.84

7.7.5. POWER SPECTRAL DENSITY

LIMITS



FCC §15.247 (e)


IC RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.74	8	-5.26
Middle	2440	4.17	8	-3.83
High	2480	2.11	8	-5.89

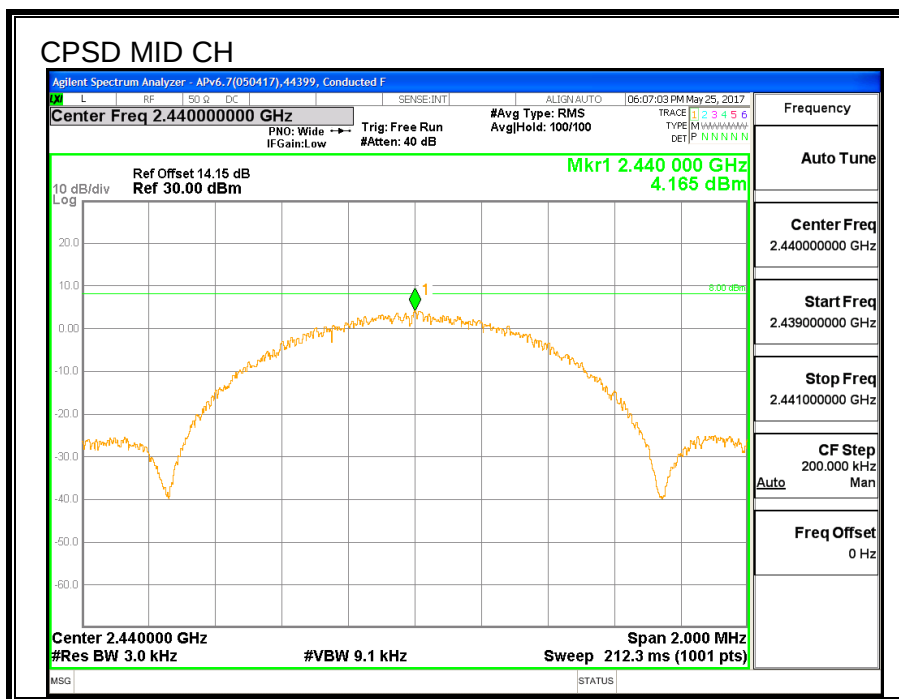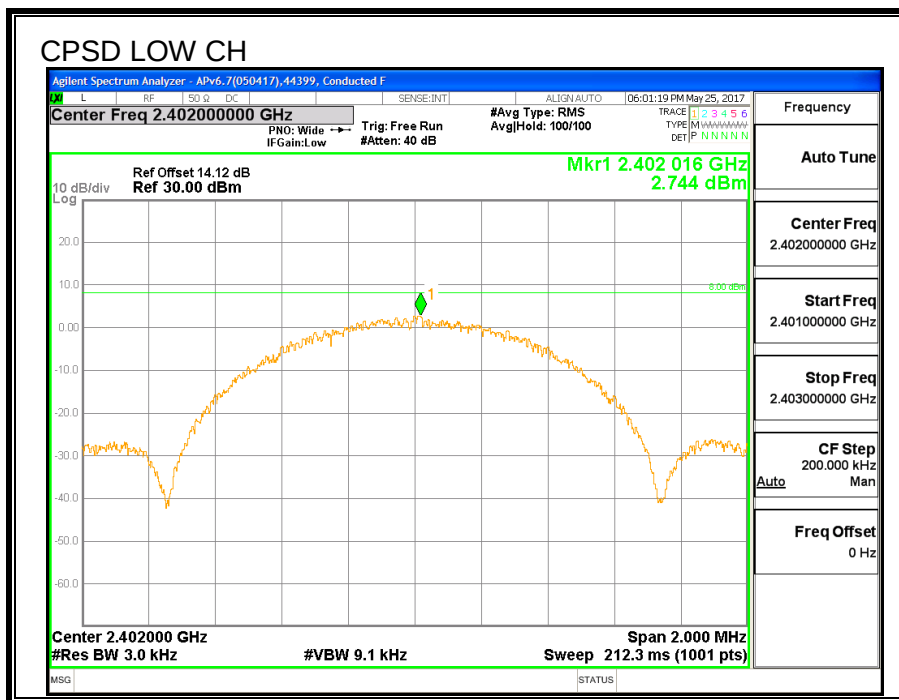

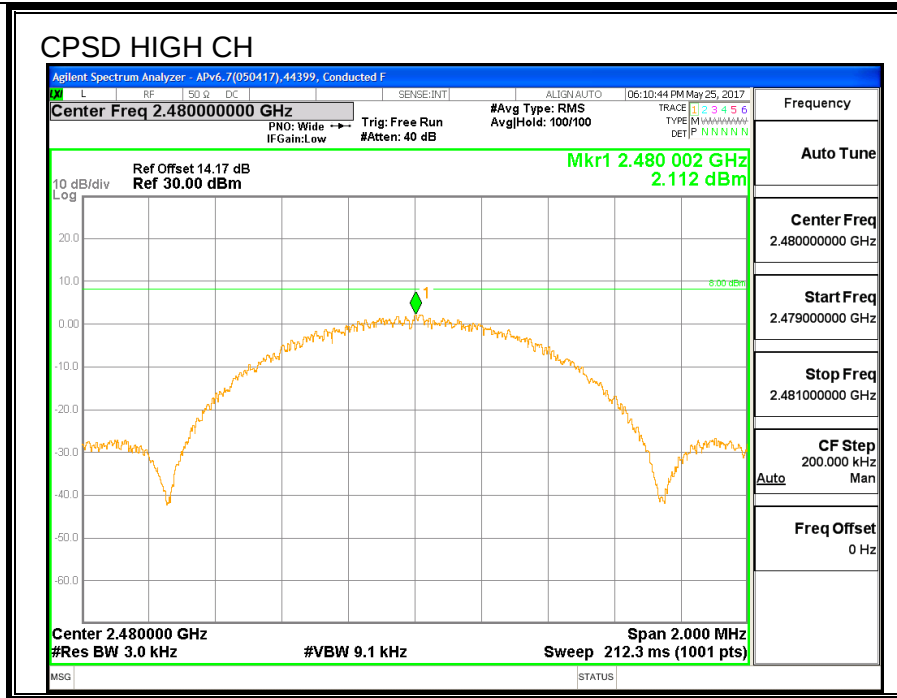

7.7.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)


IC RSS-247 (5.5)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


RESULTS

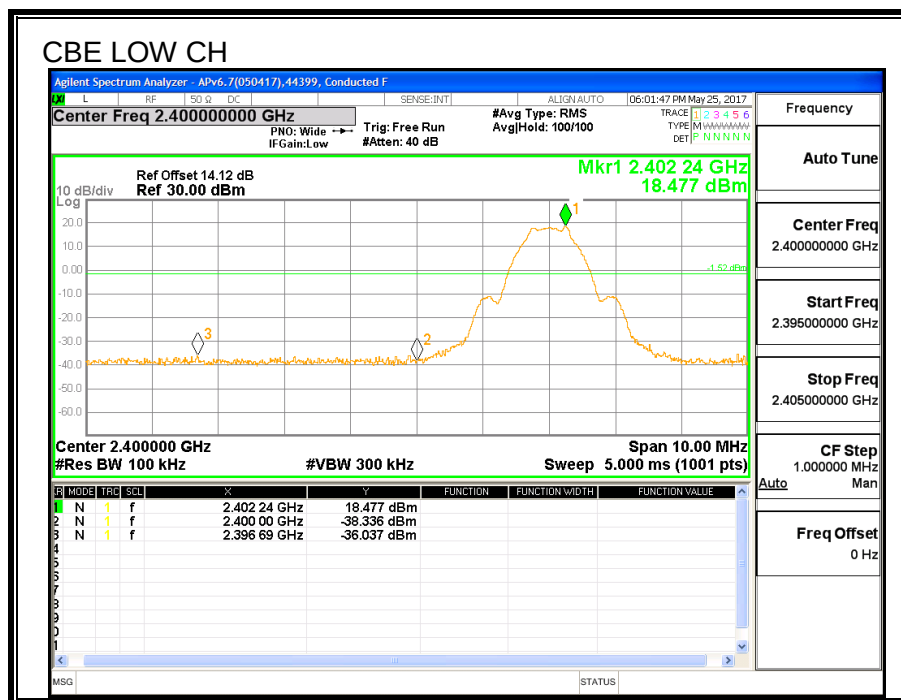


CBE MID CH

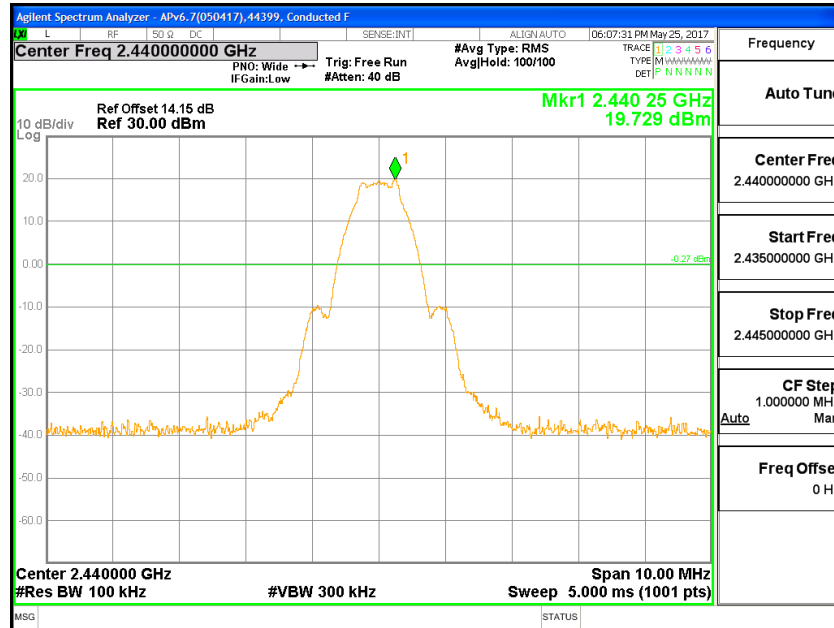


CBE HIGH CH

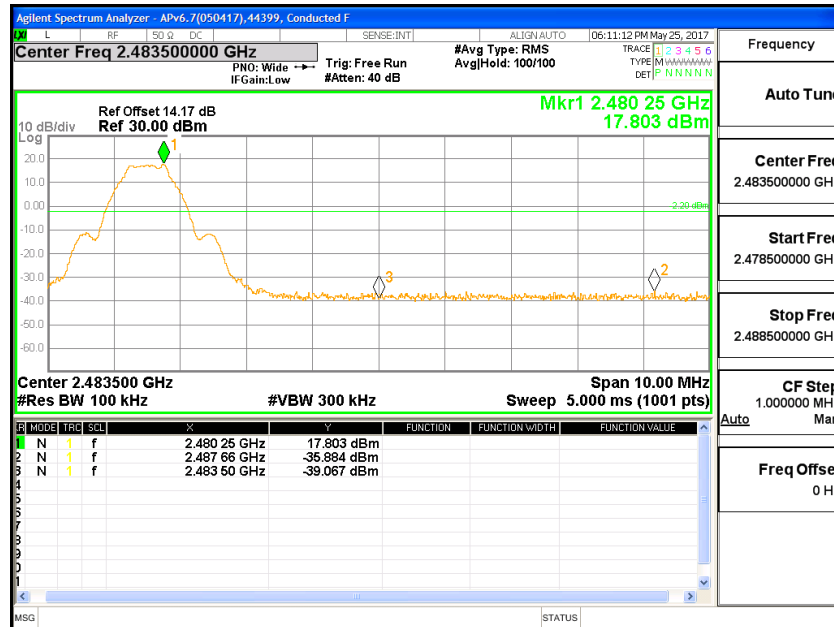


CSPUR LOW CH

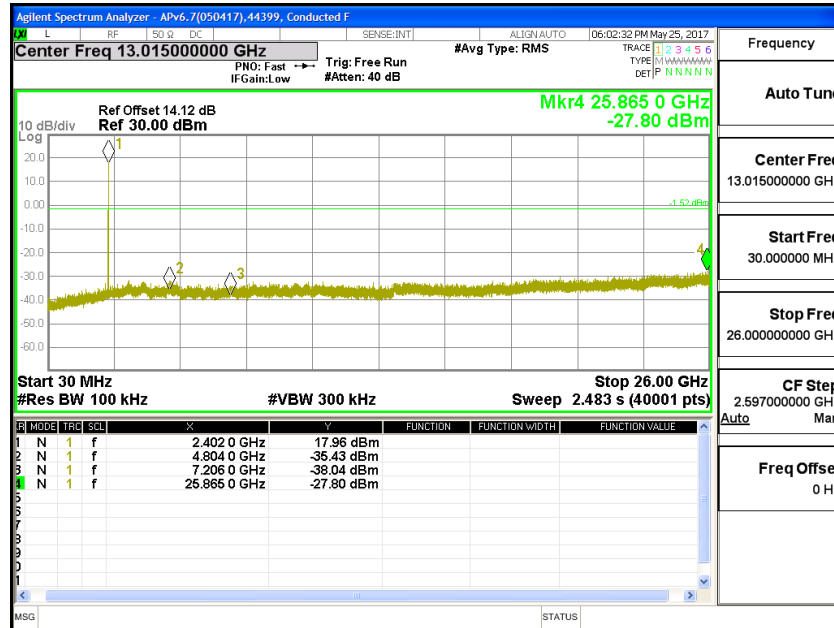

CSPUR MID CH

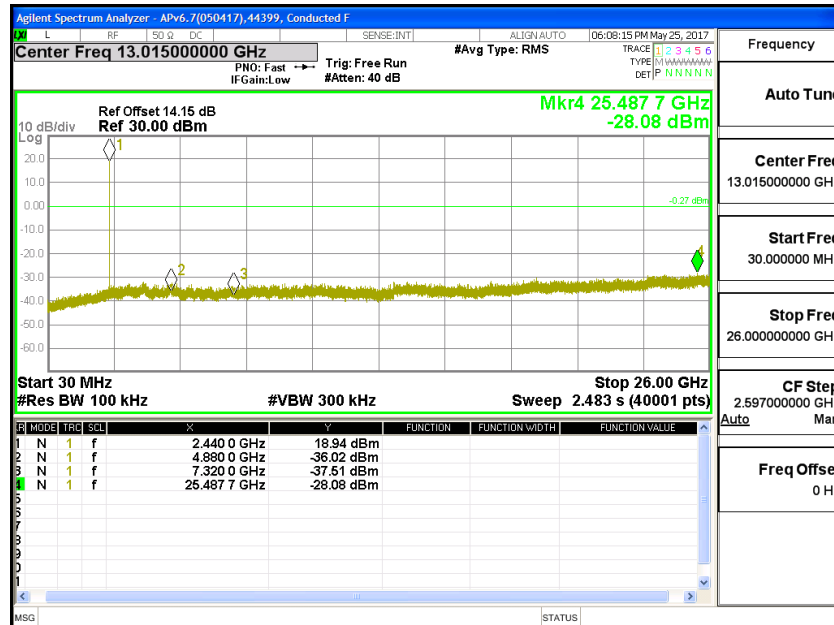

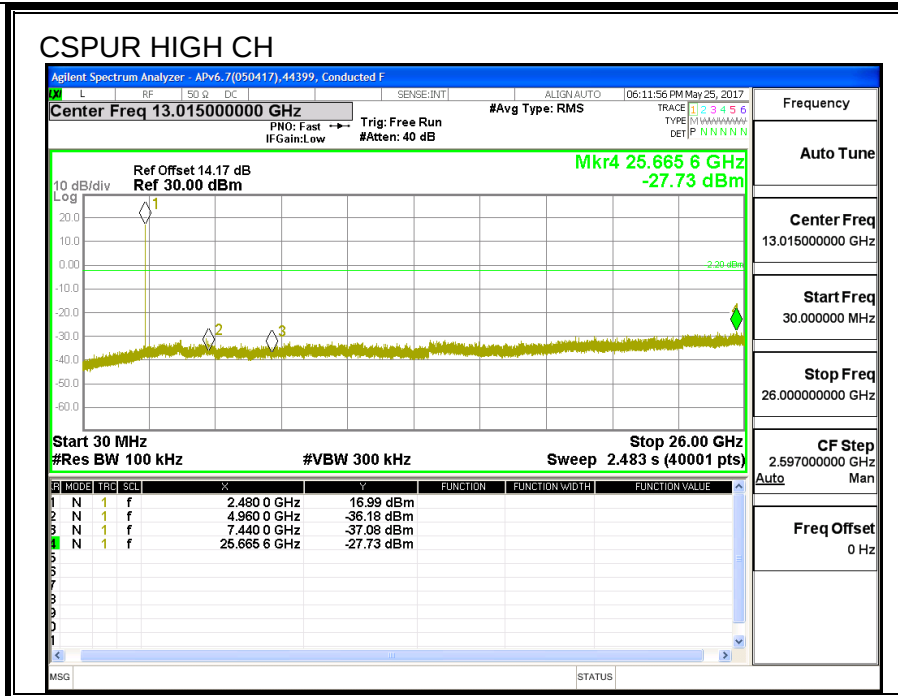

7.8. LAT 3 BLE 1M Plow

7.8.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)


IC RSS-247 (5.2) (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.698	0.5
Middle	2440	0.696	0.5
High	2480	0.700	0.5

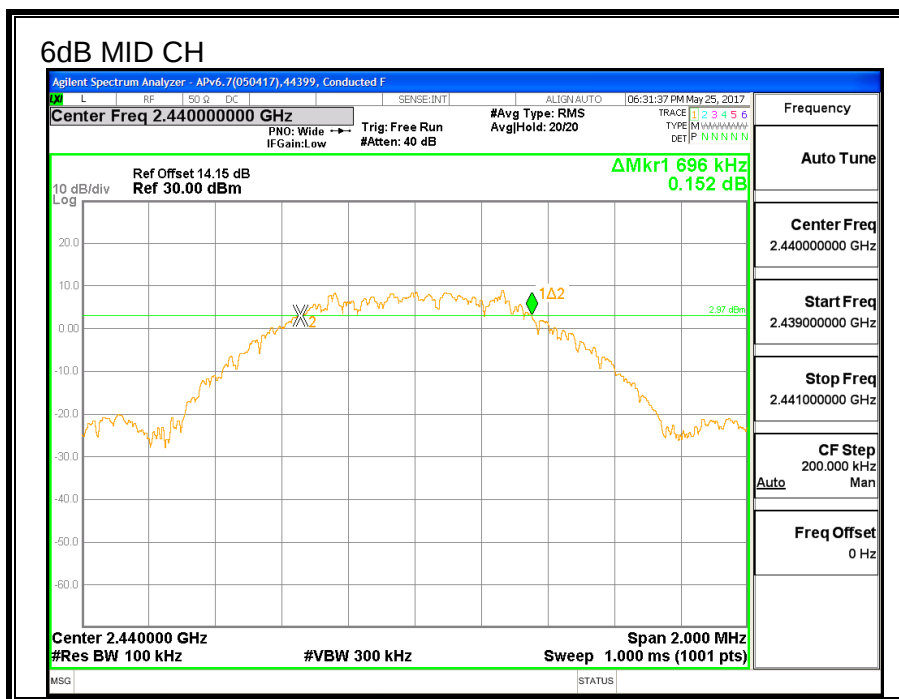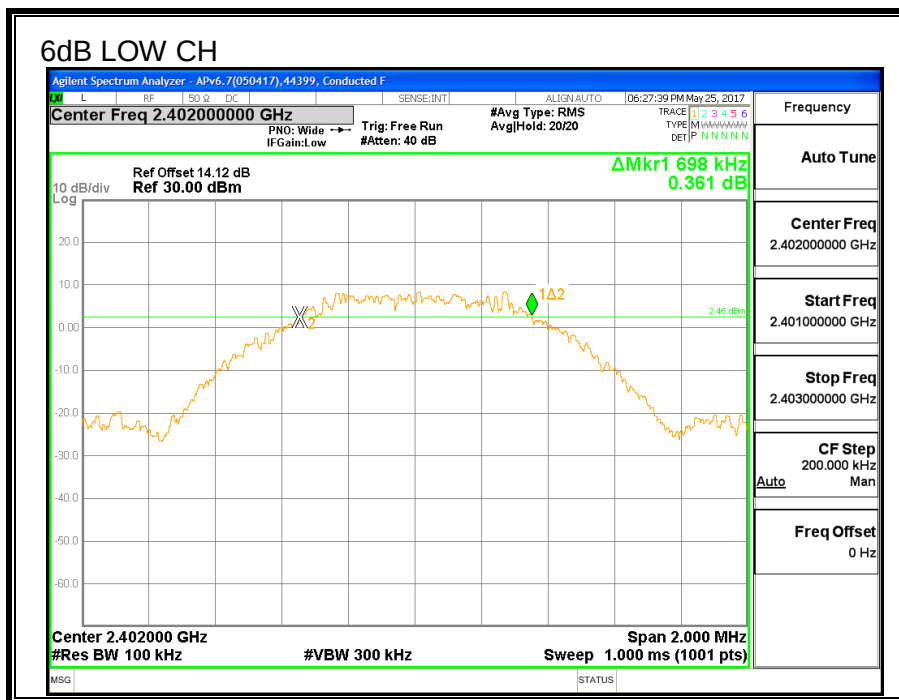

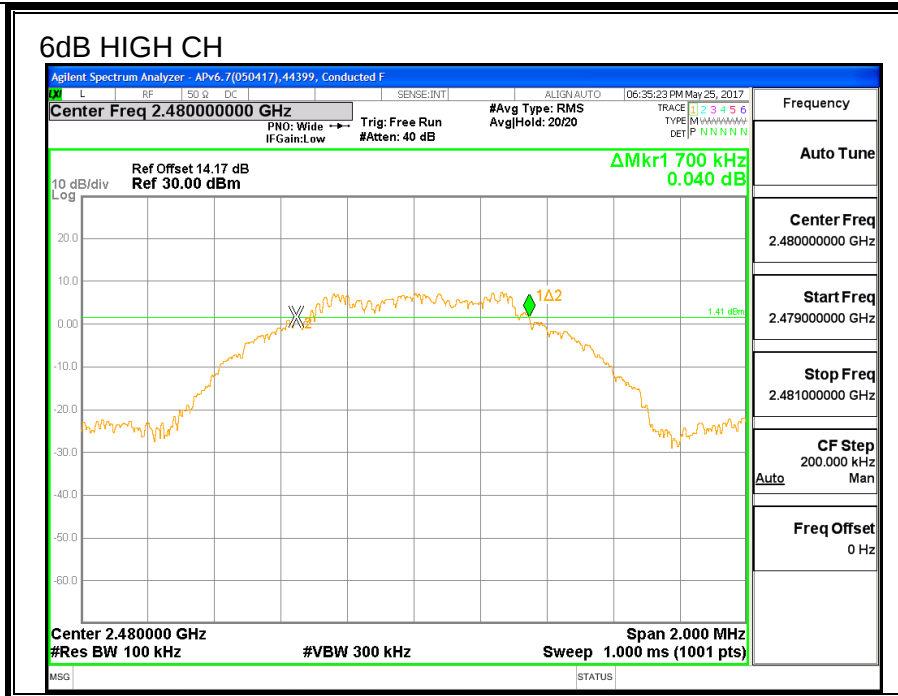

7.8.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


Test Procedure

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.058
Middle	2440	1.055
High	2480	1.054

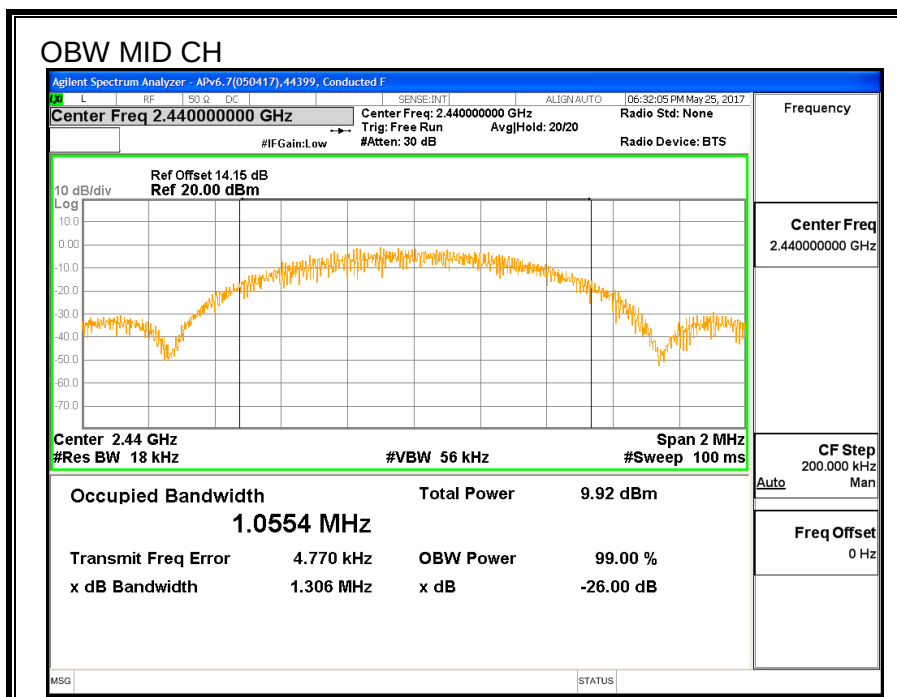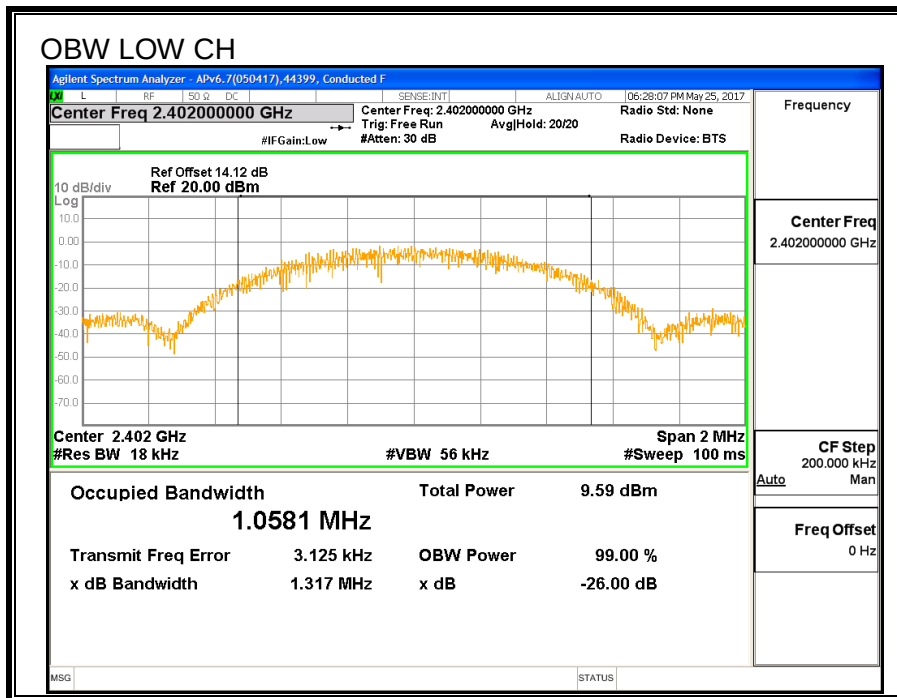

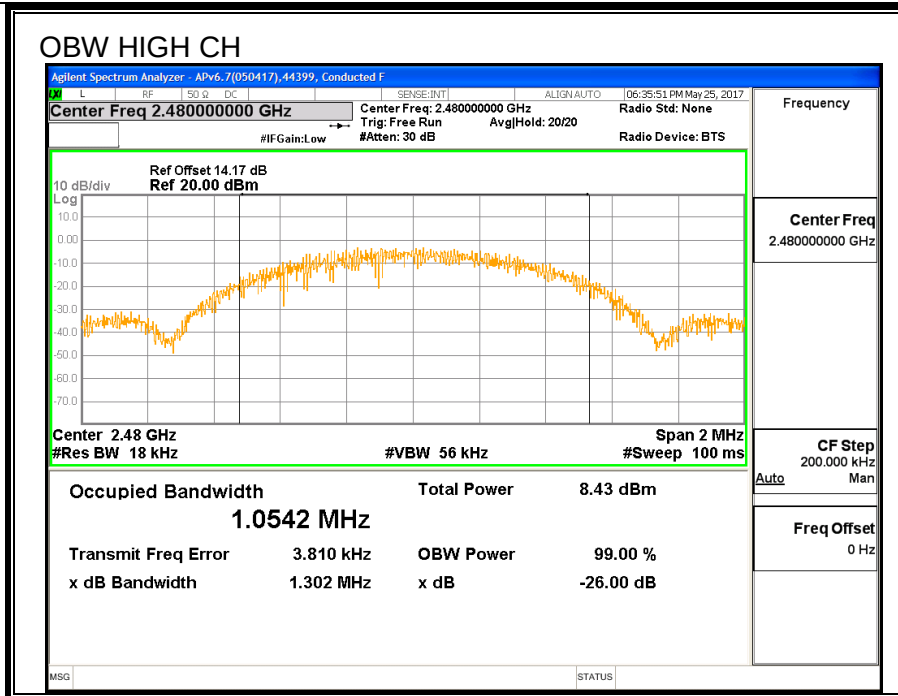

7.8.3. AVERAGE POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	9.66
Middle	2440	9.83
High	2480	9.72

7.8.4. OUTPUT POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.99	30	-20.01
Middle	2440	10.17	30	-19.83
High	2480	10.04	30	-19.96

7.8.5. POWER SPECTRAL DENSITY

LIMITS



FCC §15.247 (e)


IC RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-6.91	8	-14.91
Middle	2440	-6.66	8	-14.66
High	2480	-7.88	8	-15.879

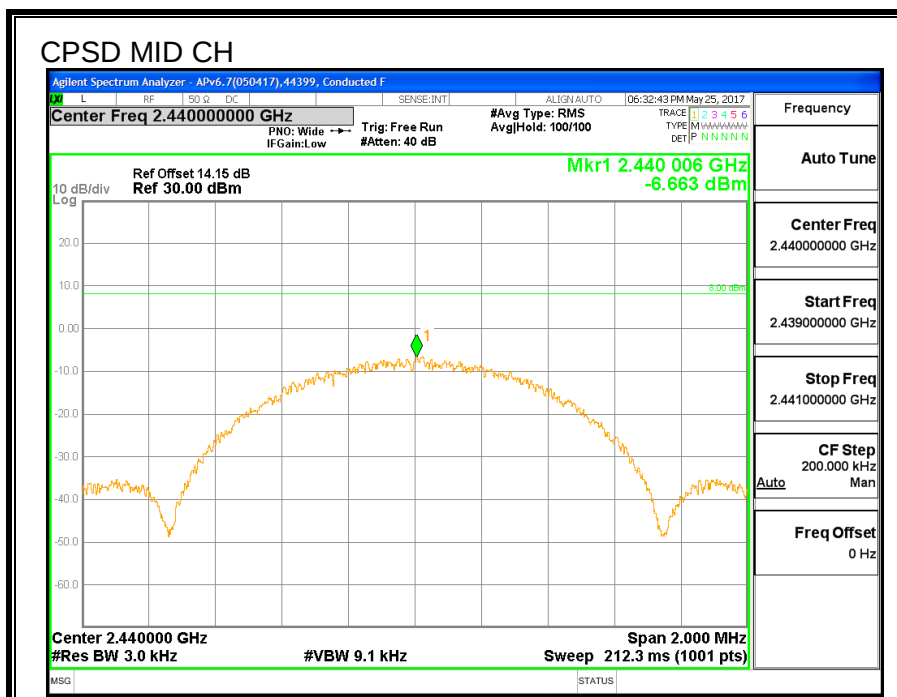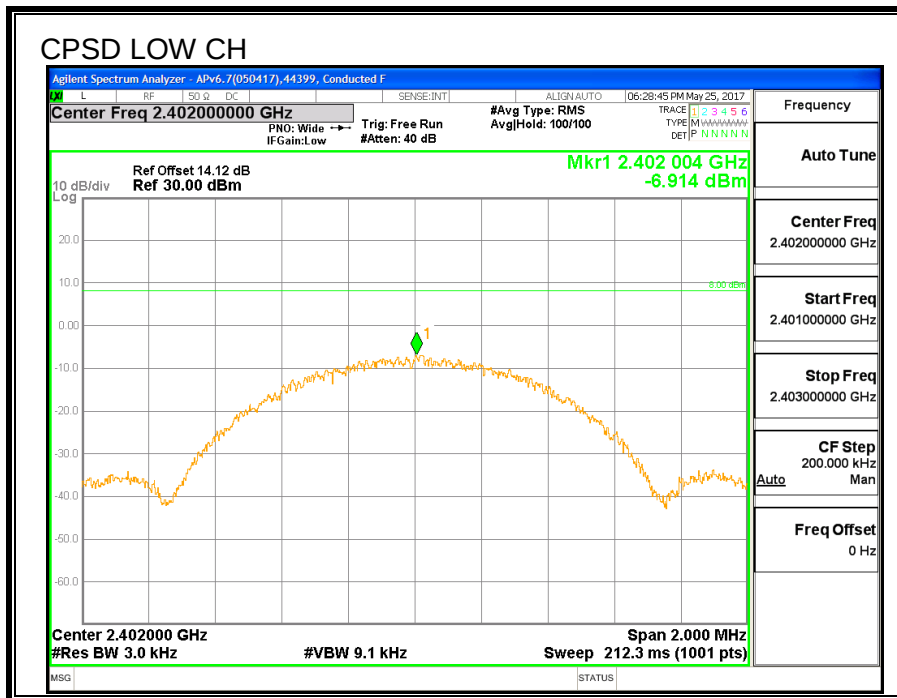

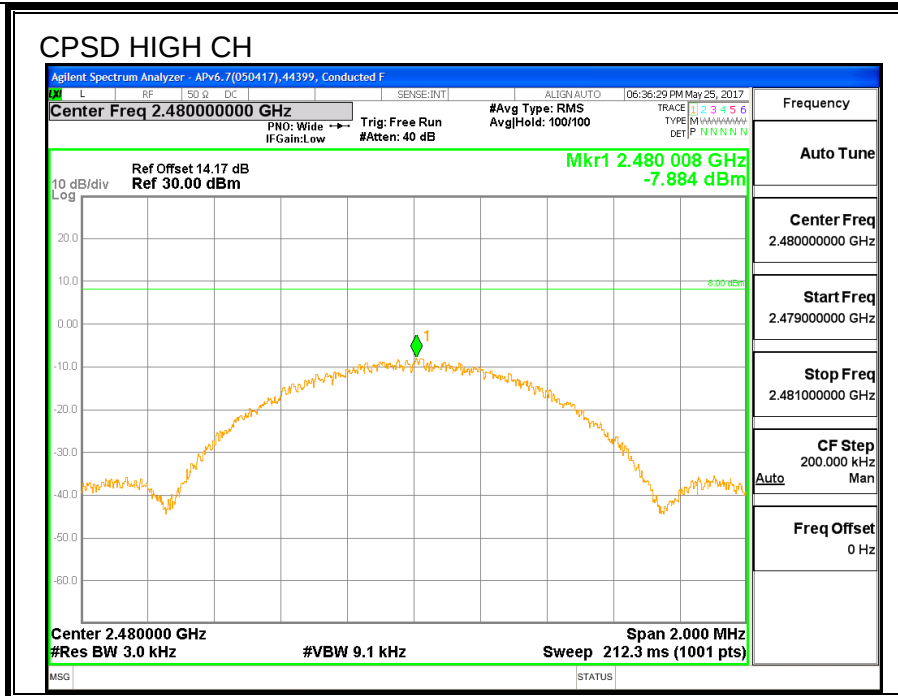

7.8.6. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)


IC RSS-247 (5.5)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


RESULTS

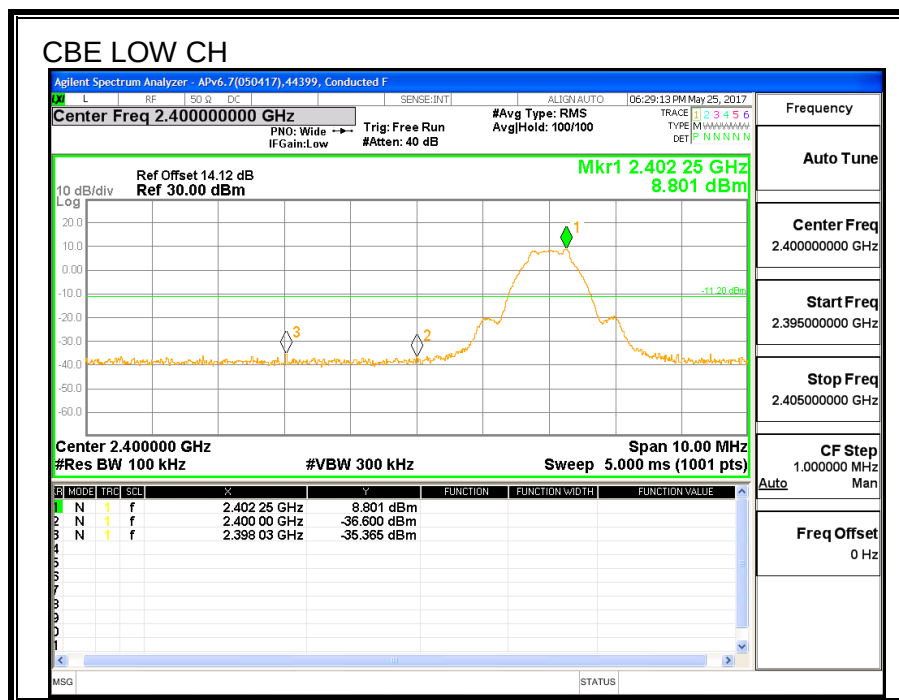


CBE MID CH

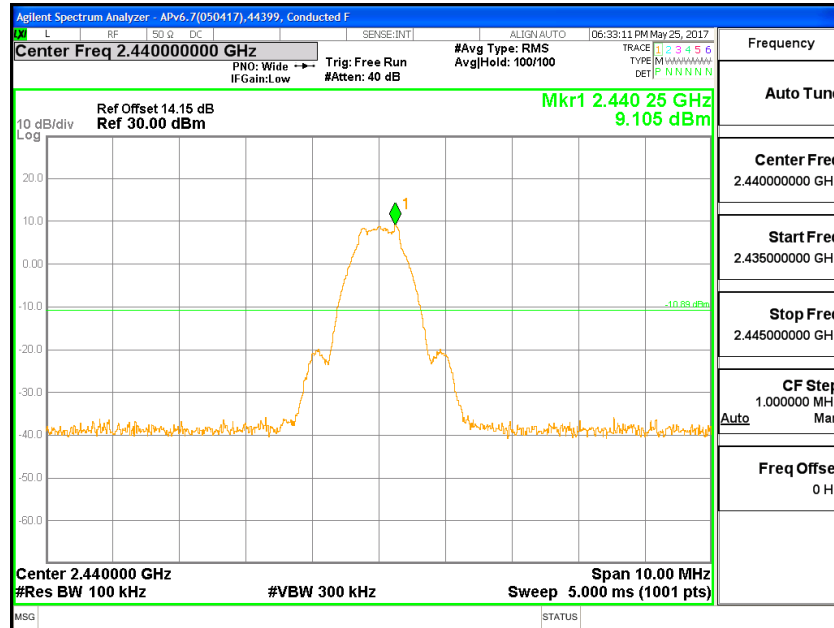


CBE HIGH CH

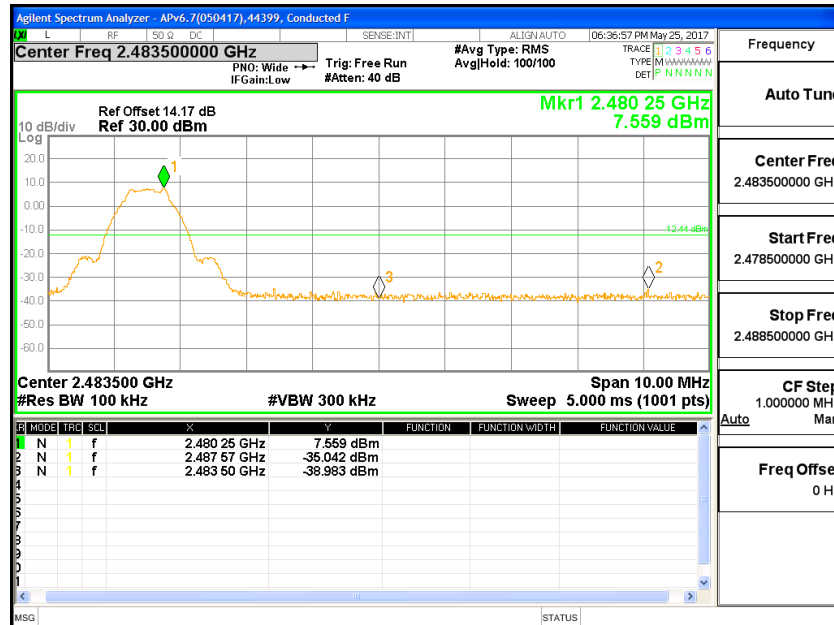


CSPUR LOW CH

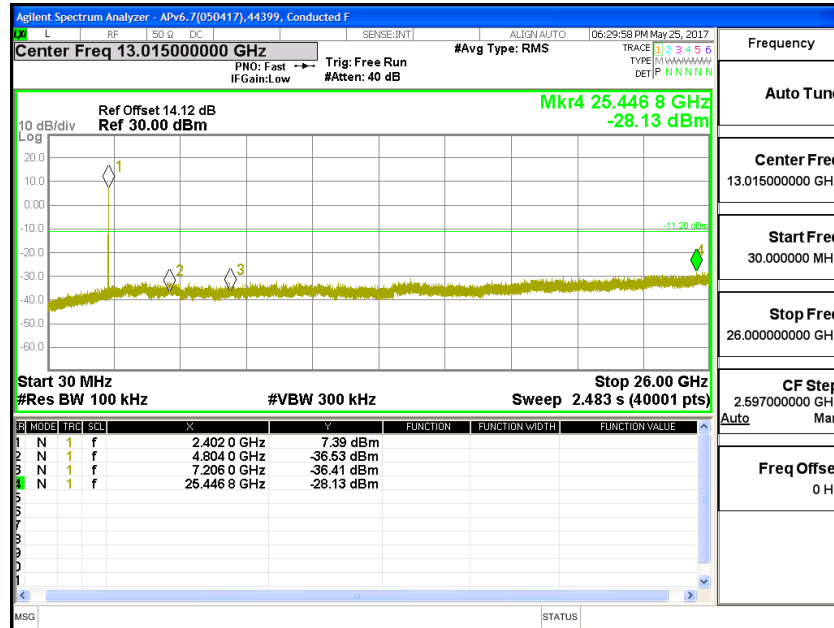

CSPUR MID CH

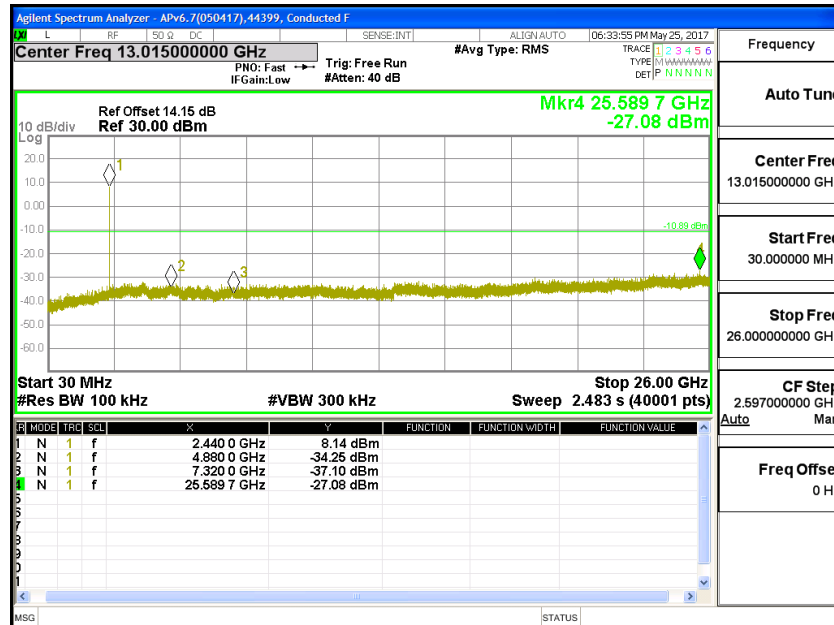

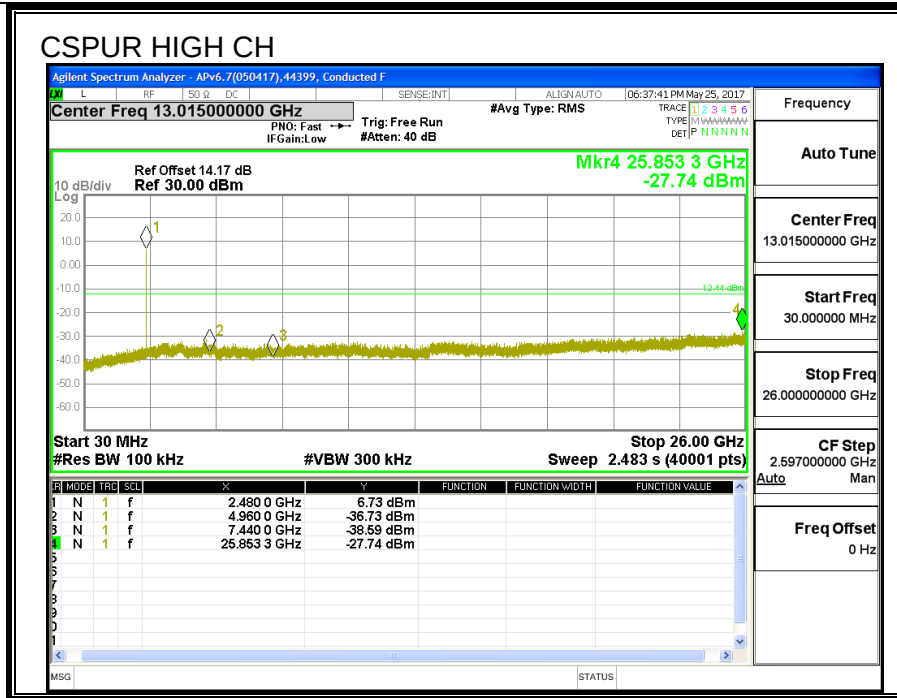

7.9. LAT 3 BLE 2M Pmax

7.9.1. AVERAGE POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	19.66
Middle	2440	19.86
High	2480	19.75

7.9.2. OUTPUT POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a broadband Peak/average RF power meter

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.99	30	-10.01
Middle	2440	20.20	30	-9.80
High	2480	20.07	30	-9.93

7.10. LAT 3 BLE 2M P1ow

7.10.1. AVERAGE POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV Power (dBm)
Low	2402	9.59
Middle	2440	9.74
High	2480	9.68

7.10.2. OUTPUT POWER

ID:	44353	Date:	8/25/2017
------------	-------	--------------	-----------

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a broadband Peak/average RF power meter

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.92	30	-20.08
Middle	2440	10.08	30	-19.92
High	2480	10.00	30	-20.00